



# FCC

# RF Test Report

**Product Name: Smart Phone**

**Model Number: H1511**

**Report No: SYBH(Z-RF)011072015-2002**

**FCC ID: QISH1511**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,  
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518



## Notice

1. The laboratory has Passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
  2. The laboratory has Passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
  3. The laboratory has been listed by the US Federal Communications Commission to perform electromagnetic emission measurements. The site recognition number is 684868.
  4. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-1.
  5. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
  6. The test report is invalid if there is any evidence of erasure and/or falsification.
  7. The test report is only valid for the test samples.
  8. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
1. The laboratory has Passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.



**Applicant:** Huawei Technologies Co., Ltd.  
**Address:** Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Date of Receipt Sample:** 2015-07-20  
**Start Date of Test:** 2015-07-20  
**End Date of Test:** 2015-09-10

**Test Result:** Pass

<b>Approved by Senior Engineer:</b>	2015-09-10	Liu Chunlin	
	Date	Name	Signature

<b>Prepared by:</b>	2015-09-10	maowenli	
	Date	Name	Signature



**CONTENT**

1 General Information ..... 5

    1.1 Applied Standard ..... 5

    1.2 Test Location ..... 5

    1.3 Test Environment Condition ..... 5

2 Test Summary ..... 6

    2.1 Measurement Technical Requirements ..... 6

3 Description of the Equipment under Test (EUT) ..... 8

    3.1 General Description ..... 8

    3.2 EUT Identity ..... 8

    3.3 Technical Description ..... 10

4 General Test Conditions / Configurations ..... 12

    4.1 Test Modes ..... 12

    4.2 EUT Configurations ..... 12

    4.3 Test Environments ..... 17

    4.4 Test Setups ..... 17

    4.5 Test Conditions ..... 20

5 Main Test Instruments ..... 22



## 1 General Information

### 1.1 Applied Standard

Applied Rules: 47 CFR FCC Part 2, Subpart J 2014  
47 CFR FCC Part 15, Subpart C 2014  
47 CFR FCC Part 15, Subpart E 2014

Test Method: FCC KDB 558074 D01 DTS Meas Guidance v03r02  
FCC KDB 662911 D01 Multiple Transmitter Output v02  
KDB 789033 D02 General UNII Test Procedures New Rules v01  
ANSI C63.10-2013, American National Standard for Testing Unlicensed  
Wireless Devices

### 1.2 Test Location

Test Location: Reliability Laboratory of Huawei Technologies Co., Ltd.  
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C

### 1.3 Test Environment Condition

Ambient Temperature: 19.5 to 25 °C  
Ambient Relative Humidity: 40 to 55 %  
Atmospheric Pressure: Not applicable

## 2 Test Summary

### 2.1 Measurement Technical Requirements

#### 2.1.1 U-NII (5150-5250, 5250-5350, 5470-5725 MHz, 5725-5850)

Test Item	Band	FCC Rule	Requirements	Test Result	Verdict
Emission Bandwidth	5150-5250	15.403(i) 15.407(a)(1)	No limit.	Appendix A	Pass
	5250-5350	15.403(i) 15.407(a)(2)			
	5470-5725	15.403(i) 15.407(a)(2)			
	5725-5850	15.403(i) 15.407(e)	≥ 500 kHz.		
Maximum Conducted Output Power	5150-5250	15.407(a)(1) 15.407(a)(4)	< 250mW (avg during transmission)	Appendix B	Pass
	5250-5350	15.407(a)(2) 15.407(a)(4)	<MIN{250mW, 11dBm+10*Ig(E BW)} (avg during transmission)		
	5470-5725	15.407(a)(2) 15.407(a)(4)	<MIN{250mW, 11dBm+10*Ig(E BW)} (avg during transmission)		
	5725-5850	15.407(a)(3)	< 1W (avg during transmission)		
Peak Power Spectral Density	5150-5250	15.407(a)(1) 15.407(a)(4)	<11dBm/MHz (avg during transmission)	Appendix C	
	5250-5350	15.407(a)(2) 15.407(a)(4)	<11dBm/MHz (avg during transmission)		
	5470-5725	15.407(a)(2) 15.407(a)(4)	<11dBm/MHz (avg during transmission)		
	5725-5850	15.407(a)(3) 15.407(a)(4)	<30dBm/500KHz (avg during transmission)		
Unwanted Emissions	5150-5250	15.407(b)(1) 15.407(b)(6) 15.407(b)(7) 15.209	<ul style="list-style-type: none"> <li>● F&lt;1GHz: §15.209/§7.2.5 limit (QP).</li> <li>● F≥1GHz &amp; out-restricted: &lt;-27dBm/MHz PK e.i.r.p. (exl. 5.15-5.35 GHz).</li> <li>● F≥1GHz &amp; in-restricted: §15.209/§7.2.5 limit (AV&amp;PK).</li> </ul>	Appendix D	Pass
	5250-5350	15.407(b)(2) 15.407(b)(6)	<ul style="list-style-type: none"> <li>● F&lt;1GHz: §15.209/§7.2.5 limit (QP).</li> </ul>		



Test Item	Band	FCC Rule	Requirements	Test Result	Verdict
		15.407(b)(7) 15.209	<ul style="list-style-type: none"> <li>● F≥1GHz &amp; out-restricted: &lt;-27dBm/MHz PK e.i.r.p. (exl. 5.25-5.35 GHz).</li> <li>● F≥1GHz &amp; in-restricted: §15.209/§7.2.5 limit (AV&amp;PK).</li> </ul>		
	5470-5725	15.407(b)(3) 15.407(b)(6) 15.407(b)(7) 15.209	<ul style="list-style-type: none"> <li>● F&lt;1GHz: §15.209/§7.2.5 limit (QP).</li> <li>● F≥1GHz &amp; out-restricted: &lt;-27dBm/MHz PK e.i.r.p. (exl. 5.47-5.725 GHz).</li> <li>● F≥1GHz &amp; in-restricted: §15.209/§7.2.5 limit (AV&amp;PK).</li> </ul>		
	5725-5850	15.407(b)(4) 15.407(b)(6) 15.407(b)(7) 15.209	<ul style="list-style-type: none"> <li>● F&lt;1GHz: §15.209/§7.2.5 limit (QP)</li> <li>● F≥1GHz &amp; out-restricted: &lt;-17dBm/MHz PK e.i.r.p.(from the edge to 10 MHz above or below the band edge); &lt;-27dBm/MHz PK e.i.r.p( for frequencies 10 MHz or greater above or below the band edge) (exl. 5725-5850 GHz).</li> <li>● F≥1GHz &amp; in-restricted: §15.209/§7.2.5 limit (AV&amp;PK).</li> </ul>		
Frequency Stability	5150-5250 5250-5350 5470-5725 5725-5850	15.407(g)	FCC Part 15.407(g)	Appendix E	Pass
AC Power Line Conducted Emissions	5150-5250 5250-5350 5470-5725 5725-5850	15.207	FCC Part 15.207 conducted limit;	Appendix F	Pass



### 3 Description of the Equipment under Test (EUT)

#### 3.1 General Description

H1511 is subscriber equipment in the LTE/WCDMA/CDMA/GSM system. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. The HSPA+/UMTS frequency band is Band I and Band II and Band IV and Band V. The CDMA/1XEV-DO band is BC1 and BC0 and BC10. The LTE frequency band is B2 and B3 and B4 and B5 and B7 and B12 and B13 and B17 and B25 and B26 and B29 and B30 and B41. The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/HSPA/UMTS and GSM/GPRS/EDGE and CDMA2000 1x and 1XEV-DO protocol processing, voice, video MMS service, GPS, AGPS NFC and WIFI etc. Externally it provides micro SD card interface (it can also used as micro SD card interface), earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

#### 3.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

##### 3.2.1 Board

Board		
Description	Hardware Version	Software Version
Main board	HL1NINAMH	User release M MDA

##### 3.2.2 Sub-Assembly

Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
Adapter	HW-050300U00	Huawei Technologies Co., Ltd.	Input Voltage: ~100-240V 50/60Hz 0.5A Output Voltage: 5V <b>===</b> 3A Rated Power: 5W
Adapter	HW-050300E00	Huawei Technologies Co., Ltd.	Input Voltage: ~100-240V 50/60Hz 0.5A Output Voltage: 5V <b>===</b> 3A Rated Power: 5W
Adapter	HW-050300B00	Huawei Technologies	Input Voltage: ~100-240V 50/60Hz 0.5A



Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
		Co., Ltd.	Output Voltage: 5V  3A Rated Power: 5W
Adapter	HW-050300A00	Huawei Technologies Co., Ltd.	Input Voltage: ~100-240V 50/60Hz 0.5A Output Voltage: 5V  3A Rated Power: 5W
Adapter	HW-050300J00	Huawei Technologies Co., Ltd.	Input Voltage: ~100-240V 50/60Hz 0.5A Output Voltage: 5V  3A Rated Power: 5W
Adapter	HW-050300R00	Huawei Technologies Co., Ltd.	Input Voltage: ~100-240V 50/60Hz 0.5A Output Voltage: 5V  3A Rated Power: 5W
Adapter	HW-050300I00	Huawei Technologies Co., Ltd.	Input Voltage: ~100-240V 50/60Hz 0.5A Output Voltage: 5V  3A Rated Power: 5W
Battery	HB416683ECW	Huawei Technologies Co., Ltd.	Rated capacity: 3450mAh Nominal Voltage:  +3.8V Charging Voltage:  +4.35V

### 3.3 Technical Description

Characteristics	Description	
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a (20 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11n (20 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11n (40 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11ac (20 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11ac (40 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11ac (80 MHz channel bandwidth),	
TX/RX Operating Range	All	fc = 5000 MHz + N * 5 MHz, where: - fc = "Operating Frequency" in MHz, - N = "Channel Number".
	5150-5250 MHz (U-NII)	N = 36 to 48 with step of 4 for the 20 MHz channel bandwidth. N = 38 to 46 with step of 4 for the 40 MHz channel bandwidth. N = 42 for the 80 MHz channel bandwidth.
	5250-5350 MHz (U-NII)	N = 52 to 64 with step of 4 for the 20 MHz channel bandwidth. N = 54 to 62 with step of 4 for the 40 MHz channel bandwidth. N = 58 for the 80 MHz channel bandwidth.
	5470-5725 MHz (U-NII)	N = 100 to 140 with step of 4 for the 20 MHz channel bandwidth. N = 102 to 134 with step of 4 for the 40 MHz channel bandwidth. N = 106 for the 80 MHz channel bandwidth.
	5725-5850 MHz U-NII	N = 149 to 165 with step of 4 for the 20 MHz channel bandwidth. N = 151 to 159 with step of 4 for the 40 MHz channel bandwidth. N = 155 for the 80 MHz channel bandwidth.
Modulation Type	BPSK/QPSK/16QAM/64QAM (OFDM).	
Emission Designator	U-NII(5150-5250, 5250-5350, 5470-5725)	19M5G7D (for 802.11a mod), 19M9G7D (for 802.11n 20 MHz mode), 40M9G7D (for 802.11n 40 MHz mode), 19M7G7D (for 802.11ac 20 MHz mode) 40M8G7D (for 802.11ac 40 MHz mode) 87M2G7D (for 802.11ac 80 MHz mode)
	U-NII(5725-5850)	16M7G7D (for 802.11a mod), 17M6G7D (for 802.11n 20 MHz mode), 36M6G7D (for 802.11n 40 MHz mode), 17M5G7D (for 802.11ac 20 MHz mode) 36M6G7D (for 802.11ac 40 MHz mode) 75M2G7D (for 802.11ac 80 MHz mode)
TPC	<input checked="" type="checkbox"/> Supported, <input type="checkbox"/> Not Supported	
Antenna	Type	<input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated
	Ports	<input checked="" type="checkbox"/> Ant 1, <input checked="" type="checkbox"/> Ant 2, <input type="checkbox"/> Ant 3, <input type="checkbox"/> Ant 4
	Smart System	<input checked="" type="checkbox"/> SISO (for 802.11a/n/ac), <input checked="" type="checkbox"/> CDD (for 802.11a), <input checked="" type="checkbox"/> MIMO (for 802.11n/ac), <input type="checkbox"/> Diversity (for 802.11a) : Tx & Rx



Characteristics	Description			
	Gain	Ant1:1.1 dBi (per antenna port, max.) Ant2:1.2 dBi (per antenna port, max.)		
	Remark	When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.		
Power Supply	Type	<input checked="" type="checkbox"/> AC/DC Adapter	<input type="checkbox"/> PoE:	<input type="checkbox"/> Other:



## 4 General Test Conditions / Configurations

### 4.1 Test Modes

NOTE: Worst cases for each IEEE 802.11 mode are selected to perform tests.

Test Mode	Test Modes Description
11A	IEEE 802.11a with data rate of 6 Mbps using SISO mode.
11A-CDD	IEEE 802.11a with data rate of 6 Mbps using CDD mode.
11N20	IEEE 802.11n with data rate of MCS0 and bandwidth of 20 MHz using SISO mode.
11N20m	IEEE 802.11n with data rate of MCS8 and bandwidth of 20 MHz using MIMO mode.
11N40	IEEE 802.11n with data rate of MCS0 and bandwidth of 40 MHz using SISO mode.
11N40m	IEEE 802.11n with data rate of MCS8 and bandwidth of 40 MHz using MIMO mode.
11AC20	IEEE 802.11ac with data rate of MCS0 and bandwidth of 20 MHz using SISO mode.
11AC20m	IEEE 802.11ac with data rate of MCS8 and bandwidth of 20 MHz using MIMO mode.
11AC40	IEEE 802.11ac with data rate of MCS0 and bandwidth of 40 MHz using SISO mode.
11AC40m	IEEE 802.11ac with data rate of MCS8 and bandwidth of 40 MHz using MIMO mode.
11AC80	IEEE 802.11ac with data rate of MCS0 and bandwidth of 80 MHz using SISO mode.
11AC80m	IEEE 802.11ac with data rate of MCS8 and bandwidth of 80 MHz using MIMO mode.

### 4.2 EUT Configurations

#### 4.2.1 General Configurations

Configuration	Description
Test Antenna Ports	Until otherwise specified, <ul style="list-style-type: none"> <li>All TX tests are performed at all TX antenna ports of the EUT, and</li> <li>All RX tests are performed at all RX antenna ports of the EUT.</li> </ul>
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

#### 4.2.2 Customized Configurations

##### 4.2.2.1 U-NII

Test Mode	Test Channel	Frequency[MHz]	Antenna Port	Duty Cycle
11A	36	5180	Ant 1	95
11A	36	5180	Ant 2	95
11A-CDD	36	5180	Ant 1	95
11A-CDD	36	5180	Ant 2	95



11A	48	5240	Ant 1	95
11A	48	5240	Ant 2	95
11A-CDD	48	5240	Ant 1	95
11A-CDD	48	5240	Ant 2	95
11A	52	5260	Ant 1	95
11A	52	5260	Ant 2	95
11A-CDD	52	5260	Ant 1	95
11A-CDD	52	5260	Ant 2	95
11A	64	5320	Ant 1	95
11A	64	5320	Ant 2	95
11A-CDD	64	5320	Ant 1	95
11A-CDD	64	5320	Ant 2	95
11A	100	5500	Ant 1	95
11A	100	5500	Ant 2	95
11A-CDD	100	5500	Ant 1	95
11A-CDD	100	5500	Ant 2	95
11A	140	5700	Ant 1	95
11A	140	5700	Ant 2	95
11A-CDD	140	5700	Ant 1	95
11A-CDD	140	5700	Ant 2	95
11A	149	5745	Ant 1	95
11A	149	5745	Ant 2	95
11A-CDD	149	5745	Ant 1	95
11A-CDD	149	5745	Ant 2	95
11A	165	5825	Ant 1	95
11A	165	5825	Ant 2	95
11A-CDD	165	5825	Ant 1	95
11A-CDD	165	5825	Ant 2	95
11N20	36	5180	Ant 1	95
11N20	36	5180	Ant 2	95
11N20M	36	5180	Ant 1	91
11N20M	36	5180	Ant 2	91
11N20	48	5240	Ant 1	95
11N20	48	5240	Ant 2	95
11N20M	48	5240	Ant 1	91
11N20M	48	5240	Ant 2	91
11N20	52	5260	Ant 1	95
11N20	52	5260	Ant 2	95
11N20M	52	5260	Ant 1	91



11N20M	52	5260	Ant 2	91
11N20	64	5320	Ant 1	95
11N20	64	5320	Ant 2	95
11N20M	64	5320	Ant 1	91
11N20M	64	5320	Ant 2	91
11N20	100	5500	Ant 1	95
11N20	100	5500	Ant 2	95
11N20M	100	5500	Ant 1	91
11N20M	100	5500	Ant 2	91
11N20	140	5700	Ant 1	95
11N20	140	5700	Ant 2	95
11N20M	140	5700	Ant 1	91
11N20M	140	5700	Ant 2	91
11N40	38	5190	Ant 1	90
11N40	38	5190	Ant 2	91
11N40M	38	5190	Ant 1	83
11N40M	38	5190	Ant 2	83
11N40	46	5230	Ant 1	90
11N40	46	5230	Ant 2	91
11N40M	46	5230	Ant 1	83
11N40M	46	5230	Ant 2	83
11N40	54	5270	Ant 1	90
11N40	54	5270	Ant 2	91
11N40M	54	5270	Ant 1	83
11N40M	54	5270	Ant 2	83
11N40	62	5310	Ant 1	90
11N40	62	5310	Ant 2	91
11N40M	62	5310	Ant 1	83
11N40M	62	5310	Ant 2	83
11N40	102	5510	Ant 1	90
11N40	102	5510	Ant 2	91
11N40M	102	5510	Ant 1	83
11N40M	102	5510	Ant 2	83
11N40	134	5670	Ant 1	90
11N40	134	5670	Ant 2	91
11N40M	134	5670	Ant 1	83
11N40M	134	5670	Ant 2	83
11AC20	36	5180	Ant 1	95
11AC20	36	5180	Ant 2	95
11AC20M	36	5180	Ant 1	95
11AC20M	36	5180	Ant 2	95



11AC20	48	5240	Ant 1	95
11AC20	48	5240	Ant 2	95
11AC20M	48	5240	Ant 1	95
11AC20M	48	5240	Ant 2	95
11AC20	52	5260	Ant 1	95
11AC20	52	5260	Ant 2	95
11AC20M	52	5260	Ant 1	95
11AC20M	52	5260	Ant 2	95
11AC20	64	5320	Ant 1	95
11AC20	64	5320	Ant 2	95
11AC20M	64	5320	Ant 1	95
11AC20M	64	5320	Ant 2	95
11AC20	100	5500	Ant 1	95
11AC20	100	5500	Ant 2	95
11AC20M	100	5500	Ant 1	95
11AC20M	100	5500	Ant 2	95
11AC20	140	5700	Ant 1	95
11AC20	140	5700	Ant 2	95
11AC20M	140	5700	Ant 1	95
11AC20M	140	5700	Ant 2	95
11AC40	38	5190	Ant 1	91
11AC40	38	5190	Ant 2	90
11AC40M	38	5190	Ant 1	91
11AC40M	38	5190	Ant 2	90
11AC40	46	5230	Ant 1	91
11AC40	46	5230	Ant 2	90
11AC40M	46	5230	Ant 1	91
11AC40M	46	5230	Ant 2	90
11AC40	54	5270	Ant 1	91
11AC40	54	5270	Ant 2	90
11AC40M	54	5270	Ant 1	91
11AC40M	54	5270	Ant 2	90
11AC40	62	5310	Ant 1	91
11AC40	62	5310	Ant 2	90
11AC40M	62	5310	Ant 1	91
11AC40M	62	5310	Ant 2	90
11AC40	102	5510	Ant 1	91
11AC40	102	5510	Ant 2	90
11AC40M	102	5510	Ant 1	91
11AC40M	102	5510	Ant 2	90
11AC40	134	5670	Ant 1	91



---

---

11AC40	134	5670	Ant 2	90
11AC40M	134	5670	Ant 1	91
11AC40M	134	5670	Ant 2	90
11AC80	42	5210	Ant 1	82
11AC80	42	5210	Ant 2	82
11AC80	58	5290	Ant 1	82
11AC80	58	5290	Ant 2	82
11AC80	106	5530	Ant 1	82
11AC80	106	5530	Ant 2	82
11AC80M	42	5210	Ant 1	82
11AC80M	42	5210	Ant 2	82
11AC80M	58	5290	Ant 1	82
11AC80M	58	5290	Ant 2	82
11AC80M	106	5530	Ant 1	82
11AC80M	106	5530	Ant 2	82

### 4.3 Test Environments


NOTE: The values used in the test report may be stringent than the declared.

Environment Parameter	Selected Values During Tests		
	Temperature	Voltage	Relative Humidity
NTNV	Ambient	3.8 VDC	Ambient

### 4.4 Test Setups

#### 4.4.1 Test Setup 1


The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

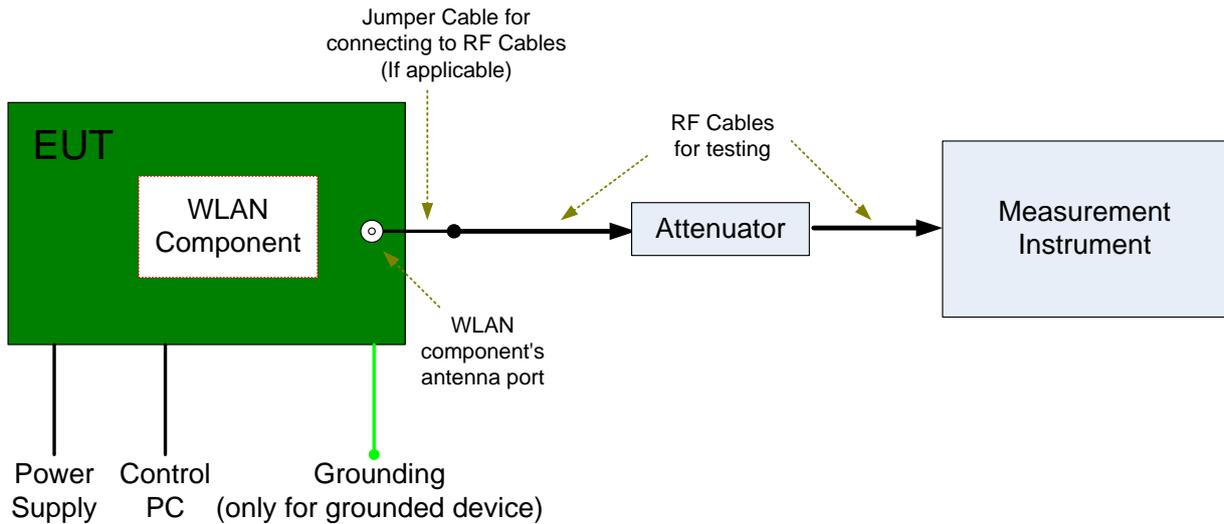


#### 4.4.2 Test Setup 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3 m (for 30 MHz to 26.5 GHz) or 1 m (for 26.5 GHz to 40 GHz). The setup is according to ANSI C63.10, ANSI C63.4 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

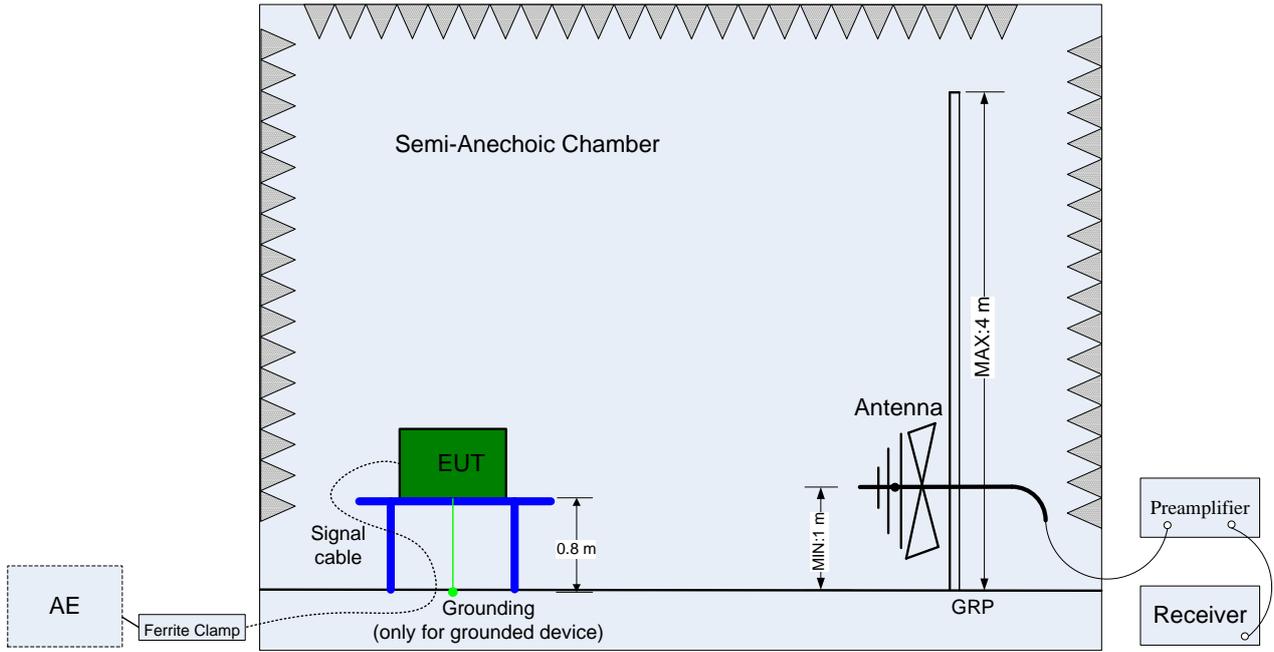

(Below 1 GHz)

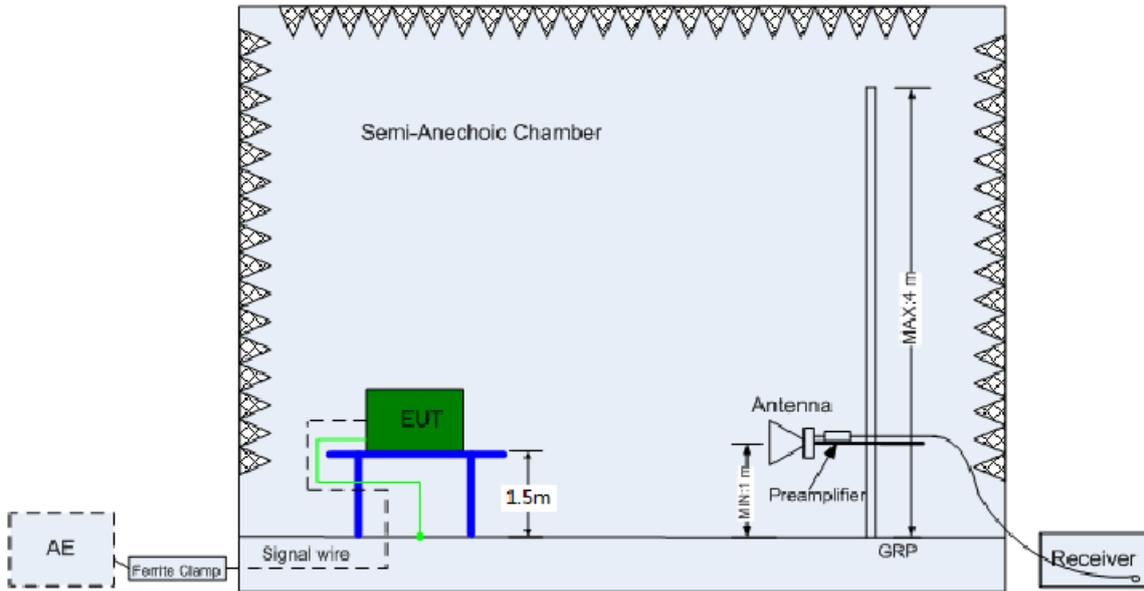


(Above 1 GHz)

### 4.4.3 Test Setup 3

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

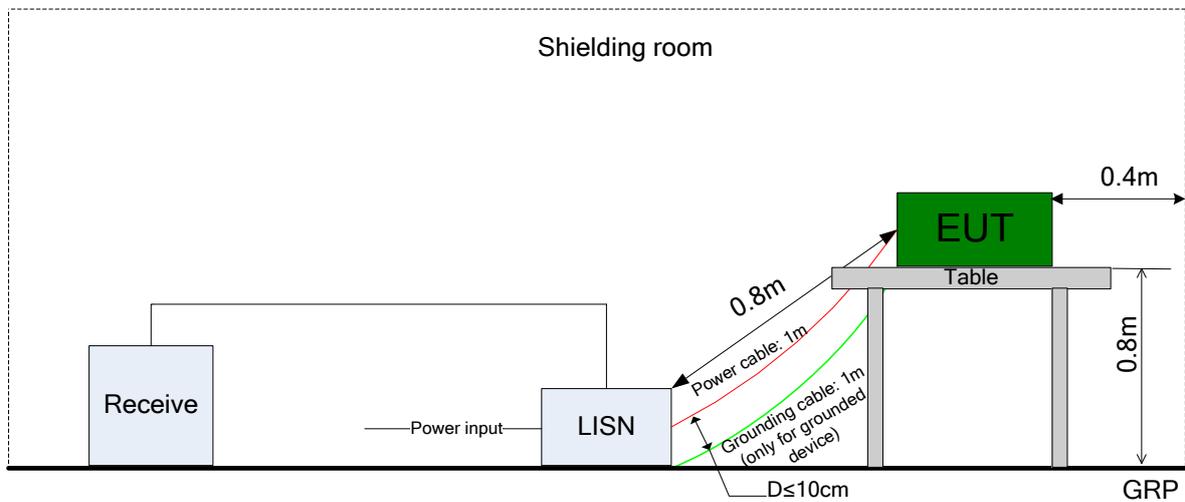



## 4.5 Test Conditions

### 4.5.1 U-NII

Test Case	Test Conditions		
	Configuration	Description	
26 dB Emission Bandwidth (EBW)	Meas. Method	FCC KDB 789033 §D).	
	Test Env.	NTNV	
	Test Setup	Test Setup 1	
	EUT Conf.	All EUT conf. with Tx modes.	
Maximum Conducted Output Power	Meas. Method	FCC KDB 789033 §C)3)b) Method SA-1 and d) Method SA-2.	
	Test Env.	NTNV	
	Test Setup	Test Setup 1	
	EUT Conf.	All EUT conf. with Tx modes.	
Peak Power Spectral Density	Meas. Method	FCC KDB 789033 §E).	
	Test Env.	NTNV	
	Test Setup	Test Setup 1	
	EUT Conf.	All EUT conf. with Tx modes.	
Peak Excursion Ratio	Meas. Method	FCC KDB 789033 §F).	
	Test Env.	NTNV	
	Test Setup	Test Setup 1	
	EUT Conf.	All EUT conf. with Tx modes.	
Unwanted Emissions (Cond.)	Meas. Method	FCC KDB 789033 §G), Conducted (antenna-port).  NOTE: Antenna-port conducted measurements (Cond.) are acceptable as an alternative to radiated measurements (Rad.) for demonstrating compliance to the limits in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test (Radt-a) for cabinet/case emissions will also be required.	
	Test Env.	NTNV	
	Test Setup	Test Setup 1	
	EUT Conf.	5150-5250	All EUT Test Mode 20 MHz bandwidth: Ch.36, Ch.48 40 MHz bandwidth: Ch.38, Ch.46 80 MHz bandwidth: Ch.42
		5250-5350	All EUT Test Mode 20 MHz bandwidth: Ch.52, Ch.64 40 MHz bandwidth: Ch.54, Ch.62 80 MHz bandwidth: Ch.58
5470-5725		All EUT Test Mode 20 MHz bandwidth: Ch.100, Ch.140	



Test Case	Test Conditions	
	Configuration	Description
		40 MHz bandwidth: Ch.102, Ch.134 80 MHz bandwidth: Ch.106
	5725-5850	All EUT Test Mode 20 MHz bandwidth: Ch.149, Ch.157, Ch.165 40 MHz bandwidth: Ch.151, Ch.159 80 MHz bandwidth: Ch.155
AC Power Line Conducted Emissions	Meas. Method	AC mains conducted. Pre: RBW = 10 kHz; Det. = Peak. Final: RBW = 9 kHz; Det. = CISPR Quasi-Peak & Average.
	Test Env.	NTNV
	Test Setup	Test Setup 3
	EUT Conf.	(Worst Conf.)

**5 Main Test Instruments**

Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal- Due
Power supply	KEITHLEY	2303	A120714713	2014-08-07	2016-08-06
Wireless Communication Test set	Agilent	N4010A	MY49081592	2014-11-04	2015-11-03
Universal Radio Communication Tester	R&S	CMU200	123299	2014-11-04	2015-11-03
Spectrum Analyzer	Agilent	N9020A	MY52090652	2015-07-08	2016-07-07
Universal Radio Communication Tester	R & S	CMW500	126854	2015-02-13	2016-02-12
Spectrum Analyzer	Agilent	E4440A	MY48250119	2015-07-08	2016-07-07
Signal Analyzer	R&S	FSQ31	200021	2014-11-04	2015-11-03
Spectrum Analyzer	Agilent	N9030A	MY49431698	2014-11-04	2015-11-03
Temperature Chamber	WEISS	WKL64	56246002940010	2015-02-13	2016-02-12
Signal generator	Agilent	E8257D	MY49281095	2014-11-04	2015-11-03
Vector Signal Generator	R&S	SMU200A	104162	2014-11-04	2015-11-03
Power Detecting & Sampling Unit	R&S	OSP-B157	100881	2014-09-08	2015-10-07
Signal Generator	Agilent	E4438C	MY47271904	2014-10-28	2015-10-27
Test receiver	R&S	ESU26	100387	2015-6-24	2016-06-23
Test receiver	R&S	ESCI	101163	2015-6-24	2016-06-23
Spectrum analyzer	R&S	FSU3	200474	2015-06-15	2016-06-14
Spectrum analyzer	R&S	FSU43	100144	2015-06-15	2016-06-14
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100262	2015-4-30	2017-4-29
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100263	2015-4-30	2017-4-29
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-490	2015-4-30	2017-4-29
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-520	2015-4-30	2017-4-29
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	2015-4-30	2017-4-29
double ridged horn antenna (0.8G-18GHz)	R&S	HF907	100305	2015-4-30	2017-4-29
Pyramidal Horn Antenna(18GHz-26.5GHz)	ETS-Lindgren	3160-09	5140299	2015-7-15	2017-7-14
Artificial Main Network	R&S	ENV4200	100134	2015-6-24	2016-6-23
Line Impedance Stabilization Network	R&S	ENV216	100382	2015-6-24	2016-6-23

END