



FCC Part22H&24ETest Report

Product Name : cdma2000 Mobile Phone

Model No. : H210C

FCC ID : QISH210C

Applicant : HUAWEI TECHNOLOGIES CO., LTD.

Address : Administration Building, Headquarters of Huawei
Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Date of Receipt : 07/05/2013

Test Date : 07/05/2013~ 22/05/2013

Issued Date : 28/05/2013

Report No. : 135S014R-HP-US-P07V01

Report Version : V 1.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, CNAS or any agency of the Government.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : 28/05/2013

Report No. : 135S014R-HP-US-P07V01



Product Name : cdma2000 Mobile Phone

Applicant : HUAWEI TECHNOLOGIES CO., LTD.

Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Manufacturer : HUAWEI TECHNOLOGIES CO., LTD.

Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Model No. : H210C

FCC ID : QISH210C

EUT Voltage : DC 3.7V

Brand Name : HUAWEI

Applicable Standard : FCC CFR Title 47 Part 2, TIA/EIA 603-C
FCC Part22 Subpart H, FCC Part24 Subpart E

Test Result : Complied

Performed Location : Suzhou EMC Laboratory
No.99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., Suzhou, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Registration Number: 800392

Documented By : Alice Ni

Reviewed By : Jameyuan

Approved By : Robin Wu

Laboratory Information

We, **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted(audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scope:

Taiwan R.O.C.	:	BSMI, NCC, TAF
Germany	:	TUV Rheinland
Norway	:	Nemko, DNV
USA	:	FCC
Japan	:	VCCI
China	:	CNAS

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site :<http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site :
<http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yongxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com

LinKou Testing Laboratory :

No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451, Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com

Suzhou Testing Laboratory :

No.99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., SuZhou, China
TEL : +86-512-6251-5088 / FAX : 86-512-6251-5098 E-Mail : service@quietek.com

TABLE OF CONTENTS

Description	Page
1. General Information.....	6
1.1. EUT Description	6
1.2. Mode of Operation.....	8
1.3. Tested System Details	9
1.4. Configuration of Tested System.....	10
1.5. EUT Exercise Software.....	11
2. Technical Test.....	12
2.1. Summary of Test Result.....	12
2.2. Test Environment.....	13
3. Peak Output Power	14
3.1. Test Equipment.....	14
3.2. Test Setup.....	15
3.3. Limit.....	15
3.4. Test Procedure	15
3.5. Uncertainty	18
3.6. Test Result.....	19
4. Modulation Characteristic	24
4.1. Test Equipment.....	24
4.2. Test Setup.....	24
4.3. Limit.....	25
4.4. Uncertainty	25
4.5. Test Result.....	25
5. Occupied Bandwidth.....	26
5.1. Test Equipment.....	26
5.2. Test Setup.....	26
5.3. Limit.....	27
5.4. Test Procedure	27
5.5. Uncertainty	27
5.6. Test Result.....	28
6. Spurious Emission At Antenna Terminals (+/- 1MHz).....	40
6.1. Test Equipment.....	40
6.2. Test Setup.....	40
6.3. Limit.....	41
6.4. Test Procedure	41
6.5. Uncertainty	41
6.6. Test Result.....	42

7. Spurious Emission	48
7.1. Test Equipment.....	48
7.2. Test Setup.....	49
7.3. Limit.....	50
7.4. Test Procedure	50
7.5. Uncertainty	51
7.6. Test Result.....	52
8. Frequency Stability Under Temperature & Voltage Variations.....	76
8.1. Test Equipment.....	76
8.2. Test Setup.....	76
8.3. Limit.....	77
8.4. Test Procedure	77
8.5. Uncertainty	77
8.6. Test Result.....	78

1. General Information

1.1. EUT Description

Product Name	cdma2000 Mobile Phone
Model No.	H210C
Hardware Version	Ver.C
Software Version	H210CCDRB106
Device Category	Portable
RF Exposure Environment	Uncontrolled
Antenna Type	Internal
GPS	
GPS Function	Yes
CDMA	
Support Band	BC0/BC1
Uplink	BC0: 824~849MHz BC1: 1850~1910MHz
Downlink	BC0: 869~894MHz BC1: 1930~1990MHz
Antenna Type	Internal
Type of Modulation	QPSK
Peak Antenna Gain	BC0: 3dBi BC1: 1.3dBi
1XEVD0	
Support Band	BC0/BC1
Uplink	BC0: 824~849MHz BC1: 1850~1910MHz
Downlink	BC0: 869~894MHz BC1: 1930~1990MHz
Release Version	Rel-A
Antenna Type	Internal
Type of Modulation	QPSK
Peak Antenna Gain	BC0: 3dBi BC1: 1.3dBi

Bluetooth	
Bluetooth Frequency	2402~2480MHz
Bluetooth Version	V2.0 + EDR
Type of modulation	FHSS
Data Rate	1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps (8DPSK)
Antenna Gain	0.6dBi
Components	
Battery #1	Brand Name: HUAWEI M/N: HB4A1H Rated Voltage and Capacitance: 3.7V/900mAh S/N: UBDD219X06400165
Battery #2	Brand Name: HUAWEI M/N: HB4A1H Rated Voltage and Capacitance: 3.7V/900mAh S/N: YACCB12197129344
Adapter #1	Brand Name: HUAWEI M/N: HW-050055U1W Input: 100-240V~50/60Hz 0.2A Output: 5Vdc, 550mA S/N: HKAD12334111
Adapter #2	Brand Name: HUAWEI M/N: HW-050055U1W Input: 100-240V~50/60Hz 0.2A Output: 5Vdc, 550mA S/N: byad22307228

1.2. Mode of Operation

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: CDMA 2000 1X BC0 Link
Mode 2: CDMA 2000 1X BC1 Link
Mode 3: CDMA 2000 1XEVD0 BC0 Rel-0 Link
Mode 4: CDMA 2000 1XEVD0 BC1 Rel-0 Link
Mode 5: CDMA 2000 1XEVD0 BC0 Rel-A Link
Mode 6: CDMA 2000 1XEVD0 BC1 Rel-A Link

Note:


1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.
3. This device is a composite device in accordance with Part 15 Subpart B regulations. The report number is 135S014R-IT-US-P01V01.

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	CMU200	R&S	CMU200	N/A	N/A

1.4. Configuration of Tested System

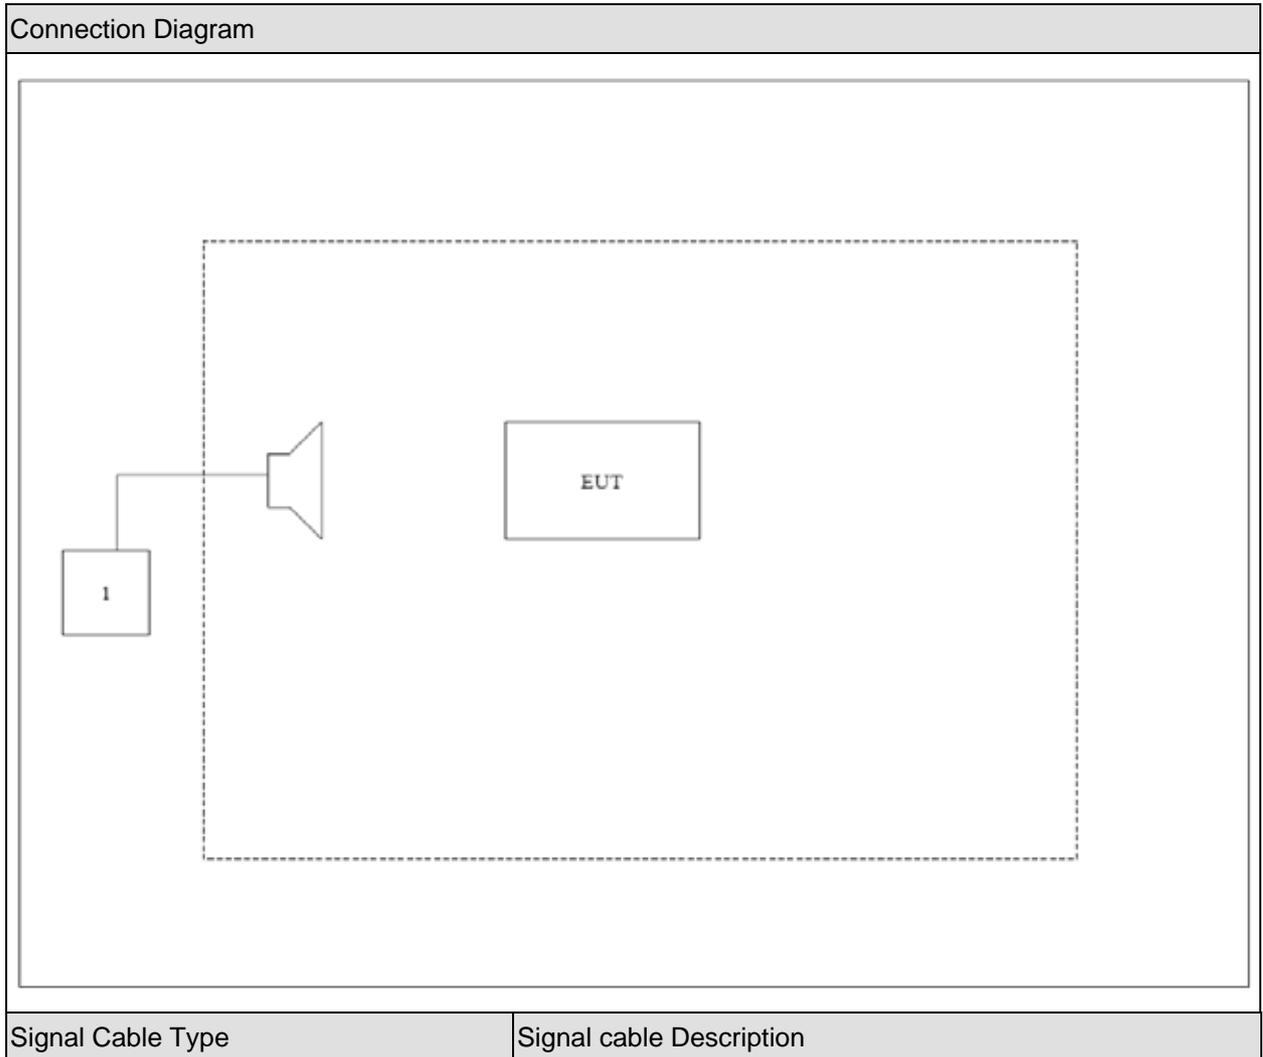

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	EUT Communicate with CMU200, then select channel to test.

2. Technical Test

2.1. Summary of Test Result

- No deviations from the test standards
- Deviations from the test standards as below description:

For CDMA 2000 1X BC0/CDMA 2000 1XEVD0 BC0 (FCC Part 22H & Part 2)

Emission			
Performed Item	Normative References	Test Performed	Deviation
Peak Output Power	FCC Part 22.913(a)(2) and Part 2.1046	Yes	No
Modulation Characteristic	FCC Part 2.1047	Yes	No
Occupied Bandwidth	FCC Part 2.1049	Yes	No
Spurious Emission At Antenna Terminals (+/- 1MHz)	FCC Part 22.917(a) and Part 2.1049	Yes	No
Spurious Emission	FCC Part 22.917(a) and Part 2.1051, 2.1053	Yes	No
Frequency Stability Under Temperature & Voltage Variations	FCC Part 22.355 and Part 2.1055	Yes	No

For CDMA 2000 1X BC1/ CDMA 2000 1XEVD0 BC1 (FCC Part 24E & Part 2)

Emission			
Performed Item	Normative References	Test Performed	Deviation
Peak Output Power	FCC Part 24.232(c) and Part 2.1046	Yes	No
Modulation Characteristic	FCC Part 2.1047	Yes	No
Occupied Bandwidth	FCC Part 2.1049	Yes	No
Spurious Emission At Antenna Terminals (+/- 1MHz)	FCC Part 24.238(a) and Part 2.1049	Yes	No
Spurious Emission	FCC Part 24.238(a) and Part 2.1051, 2.1053	Yes	No
Frequency Stability Under Temperature & Voltage Variations	FCC Part 24.235 and Part 2.1055	Yes	No

2.2. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	23
Humidity (%RH)	25-75	52
Barometric pressure (mbar)	860-1060	950-1000

3. Peak Output Power


3.1. Test Equipment

Peak Output Power / AC-5


Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100159	2014.03.30
Preamplifier	Miteq	NSP1800-25	1364185	2014.05.03
Preamplifier	QuieTek	AP-040G	CHM-0906001	2014.05.03
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2013.10.15
DRG Horn	ETS-Lindgren	3117	00123988	2014.01.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	737	2013/11/24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2014.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2014.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2014.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2013.06.11
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2014.01.11

3.2. Test Setup

Conducted Power Measurement:

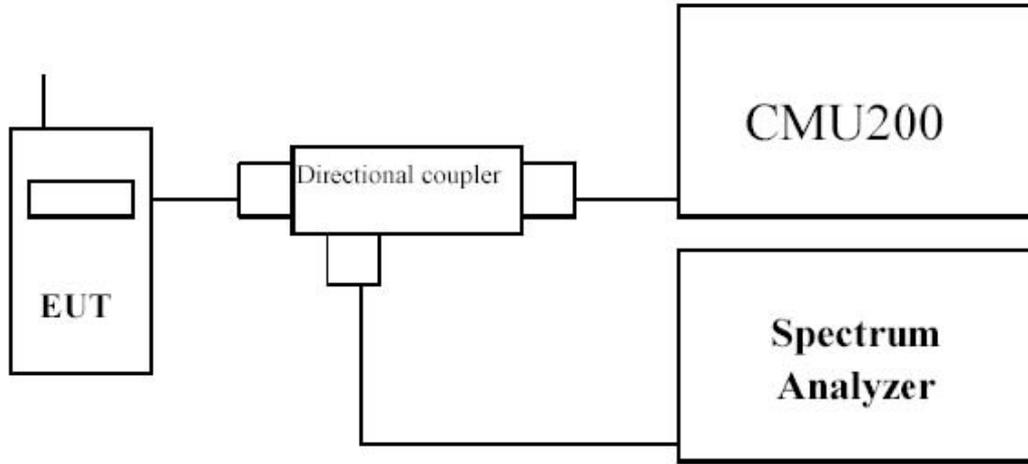

Radiated Power Measurement:

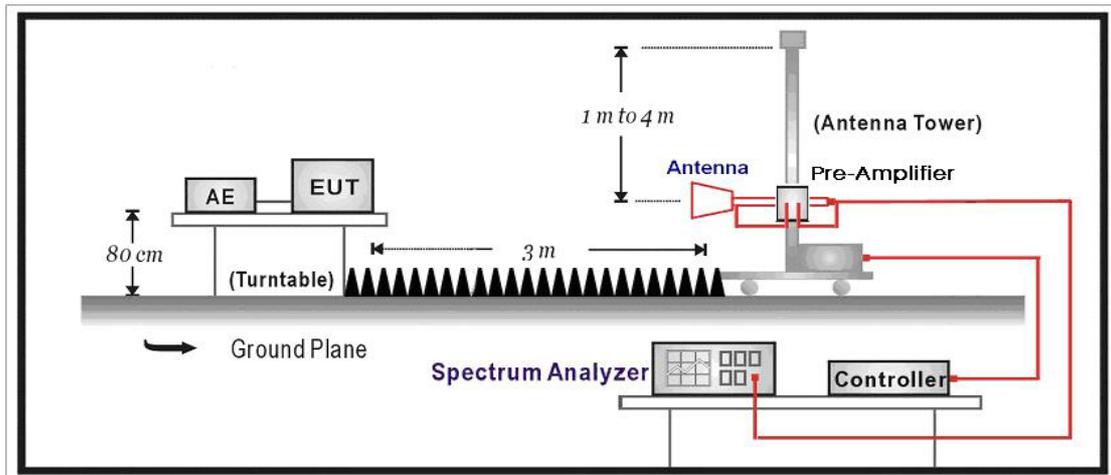

3.3. Limit

For FCC Part 22.913(a)(2):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC Part 24.232(c):

The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.

3.4. Test Procedure

Conducted Power Measurement:

- a) Place the EUT on a bench and set it in transmitting mode.
- b) Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- c) EUT Communicate with CMU200, then selects a channel for testing.
- d) Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- e) The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- f) The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- g) The output of the test antenna shall be connected to the measuring receiver.
- h) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- i) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- j) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- k) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- l) The maximum signal level detected by the measuring receiver shall be noted.
- m) The transmitter shall be replaced by a substitution antenna.
- n) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- o) The substitution antenna shall be connected to a calibrated signal generator.
- p) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- q) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- r) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- s) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- t) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if

necessary.

- u) Test site anechoic chamber refer to ANSI C63.4: 2009.

Base station simulator settings for each test mode:

1. For 1xRTT

Use CDMA2000 Rev 6 protocol in R&S CMU200.

1) Test for Reverse/Forward TCH RC1, Reverse/Forward TCH RC2, and RC3 Reverse FCH and demodulation of RC 3, 4 and 5.

a. Set up a call using Fundamental Channel Test Mode 1 (RC1, SO 2) with 9600 bps data rate only.

b. As per C.S0011 or TIA/EIA-98-F Table 4.4.5.2-1, set the test parameters as shown in Table 4-1.

c. Send continuously '0' power control bits to the Gobi2000 Module.

d. Measure the output power at Gobi2000 Module antenna connector as recorded on the power meter with values corrected for cables losses.

e. Repeat step b through d for Fundamental Channel Test Mode:

i. RC1, SO55

ii. RC2, SO9

iii. RC2, SO55

iv. RC3, SO55

2) Test for RC 3 Reverse FCH, RC3 Reverse SCH0 and demodulation of RC 3, 4 and 5.

a. Set up a call using Supplemental Channel Test Mode 3 (RC 3, SO 32) with 9600 bps Fundamental Channel and 9600 bps SCH0 data rate.

b. As per C.S0011 or TIA/EIA-98-F Table 4.4.5.2-2, set the test parameters as shown in Table 4-2.

c. Send alternating '0' and '1' power control bit to the Gobi2000 Module

d. Determine the active channel configuration. If the desired channel configuration is not the active channel configuration, increase \hat{I}_p by 1 dB and repeat the verification. Repeat this step until the desired channel configuration becomes active.

e. Measure the output power at the Gobi2000 Module antenna connector.

f. Decrease \hat{I}_p by 0.5 dB.

g. Determine the active channel configuration. If the active channel configuration is the desired channel configuration, measure the output power at the Gobi2000 Module antenna connector.

h. Repeat step f and g until the output power no longer increases or the desired channel configuration is no longer active. Record the highest output power achieved with the desired channel configuration active.

- i. Repeat step a through h ten times and average the result.

Table 4-1 Parameters for Max. Power with a single traffic code channel, SR1

Parameter	Units	Value
\hat{I}_{or}	dBm/1.23 MHz	-104
(Pilot Ec) / Ior	dB	-7
(Traffic Ec) / Ior	dB	-7.4

Table 4-2 Parameters for Max. Power with multiple traffic code channel, SR1

Parameter	Units	Value
(Pilot Ec) / Ior	dB	-7
(Traffic Ec) / Ior	dB	-7.4

3.5. Uncertainty

The measurement uncertainty is defined as for Conducted Power Measurement ± 1.2 dB, for Radiated Power Measurement ± 3.2 dB

3.6. Test Result
CDMA2000 1x EV-DO

Mode	Test Case		BC0 (850MHz) Channel						
			Conducted Power (dBm)			EIRP (dBm)			
	Num.	FWD RC/TAP	REV RC/TAP	1013	384	777	1013	384	777
1x	1	RC1	RC1 (SO2)	24.25	24.86	25.36	---	---	---
	2	RC1	RC1 (SO55)	24.30	25.00	25.45	27.29	27.45	27.55
	3	RC2	RC2 (SO9)	24.09	24.95	25.41	---	---	---
	4	RC2	RC2 (SO55)	24.02	24.99	25.45	---	---	---
	5	RC3	RC3 (SO55)	24.11	24.84	25.40	---	---	---
	6	RC3	RC3 (SO32)	24.28	24.83	25.30	---	---	---
1x EV-DO Rel0	7a	FTAP rate = 307kbps (2 slot, QPSK)	RTAP rate = 9.6kbps	23.01	24.05	24.15	---	---	---
	7b		RTAP rate = 19.2kbps	23.99	24.08	24.11	---	---	---
	7c		RTAP rate = 38.4kbps	24.01	24.06	24.18	---	---	---
	7d		RTAP rate = 76.8kbps	24.00	24.07	24.17	---	---	---
	7e		RTAP rate = 153.6kbps	24.02	24.09	24.20	27.01	27.23	27.39
1x EV-DO Rev A	8a	FETAP rate = 307kbps (2 slot, ACK channel is transmitted at all the slots)	RETAP – payload size = 128	24.02	24.25	24.43	---	---	---
	8b		RETAP – payload size = 256	24.03	24.23	24.42	---	---	---
	8c		RETAP – payload size = 512	24.06	24.22	24.41	---	---	---
	8d		RETAP – payload size = 768	24.09	24.18	24.39	---	---	---
	8e		RETAP – payload size = 1024	24.11	24.29	24.40	---	---	---
	8f		RETAP – payload size = 1536	24.17	24.19	24.45	---	---	---
	8g		RETAP – payload size = 2048	24.18	24.20	24.49	---	---	---
	8h		RETAP – payload size = 3072	24.09	24.23	24.43	---	---	---
	8i		RETAP – payload size = 4096	24.11	24.22	24.45	---	---	---
	8j		RETAP – payload size = 6144	24.16	24.29	24.44	---	---	---
	8k		RETAP – payload size = 8192	24.19	24.30	24.50	---	---	---
8l	RETAP – payload size = 12288	24.20	24.31	24.52	27.11	27.20	27.31		

Mode	Test Case			BC1 (1900MHz) Channel					
	Num.	FWD RC/TAP	REV RC/TAP	Conducted Power (dBm)			EIRP (dBm)		
				25	600	1175	25	600	1175
1x	1	RC1	RC1 (SO2)	24.62	24.21	24.51	---	---	---
	2	RC1	RC1 (SO55)	24.65	24.25	24.52	25.87	25.21	25.81
	3	RC2	RC2 (SO9)	24.58	24.08	24.47	---	---	---
	4	RC2	RC2 (SO55)	24.52	24.03	24.44	---	---	---
	5	RC3	RC3 (SO55)	24.49	24.18	24.41	---	---	---
	6	RC3	RC3 (SO32)	24.48	24.12	24.38	---	---	---
1x EV-DO Rel0	7a	FTAP rate = 307kbps (2 slot, QPSK)	RTAP rate = 9.6kbps	24.33	23.91	24.15	---	---	---
	7b		RTAP rate = 19.2kbps	24.29	23.94	24.16	---	---	---
	7c		RTAP rate = 38.4kbps	24.29	23.94	24.11	---	---	---
	7d		RTAP rate = 76.8kbps	24.33	23.95	24.05	---	---	---
	7e		RTAP rate = 153.6kbps	24.36	23.96	24.15	25.33	25.19	25.24
1x EV-DO Rev A	8a	FETAP rate = 307kbps (2 slot, ACK channel is transmitted at all the slots)	RETAP – payload size = 128	24.63	24.28	24.59	---	---	---
	8b		RETAP – payload size = 256	24.59	24.19	24.55	---	---	---
	8c		RETAP – payload size = 512	24.69	24.20	24.67	---	---	---
	8d		RETAP – payload size = 768	24.66	24.31	24.39	---	---	---
	8e		RETAP – payload size = 1024	24.68	24.28	24.55	---	---	---
	8f		RETAP – payload size = 1536	24.71	24.22	24.66	---	---	---
	8g		RETAP – payload size = 2048	24.67	24.30	24.59	---	---	---
	8h		RETAP – payload size = 3072	24.59	24.32	24.53	---	---	---
	8i		RETAP – payload size = 4096	24.66	24.28	24.58	---	---	---
	8j		RETAP – payload size = 6144	24.63	24.29	24.65	---	---	---
	8k		RETAP – payload size = 8192	24.69	24.33	24.67	---	---	---
8l	RETAP – payload size = 12288	24.72	24.35	24.70	25.46	25.39	25.41		

Note: All conducted measurements are based on an average detector.

Radiated Measurement

CDMA 2000 1X BC0 Link

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 1013 (824.7MHz)								
824.70	-21.53	H	13.02	2.56	-0.02	10.44	38.50	-28.06
824.70	-5.44	V	29.87	2.56	-0.02	27.29	38.50	-11.21
Middle Channel 384 (836.52MHz)								
836.52	-23.72	H	11.05	2.59	0.10	8.56	38.50	-29.94
836.52	-5.68	V	29.94	2.59	0.10	27.45	38.50	-11.05
High Channel 777 (848.31MHz)								
848.31	-23.11	H	11.66	2.54	0.13	9.25	38.50	-29.25
848.31	-5.41	V	29.96	2.54	0.13	27.55	38.50	-10.95

CDMA 2000 1X BC1 Link

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 25(1851.25MHz)								
1851.25	4.06	H	2.65	2.67	10.40	10.38	33.00	-22.62
1851.25	19.76	V	18.14	2.67	10.40	25.87	33.00	-7.13
Middle Channel 600 (1880MHz)								
1880.00	4.83	H	3.33	2.68	10.43	11.08	33.00	-21.92
1880.00	19.30	V	17.46	2.68	10.43	25.21	33.00	-7.79
High Channel 1175 (1908.75MHz)								
1908.75	7.27	H	5.77	2.69	10.44	13.52	33.00	-19.48
1908.75	19.90	V	18.06	2.69	10.44	25.81	33.00	-7.19

CDMA 2000 1XEVD0 Rel-0 BC0 Link

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 1013 (824.7MHz)								
824.70	-23.62	H	10.94	2.56	-0.02	8.36	38.50	-30.14
824.70	-5.72	V	29.59	2.56	-0.02	27.01	38.50	-11.49
Middle Channel 384 (836.52MHz)								
836.52	-23.44	H	11.33	2.59	0.10	8.84	38.50	-29.66
836.52	-5.91	V	29.72	2.59	0.10	27.23	38.50	-11.27
High Channel 777 (848.31MHz)								
848.31	-21.97	H	12.78	2.54	0.13	10.37	38.50	-28.13
848.31	-5.57	V	29.80	2.54	0.13	27.39	38.50	-11.11

CDMA 2000 1XEVD0 Rel-0 BC1 Link

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 25(1851.25MHz)								
1851.25	6.21	H	4.79	2.67	10.40	12.52	33.00	-20.48
1851.25	25.33	V	17.60	2.67	10.40	25.33	33.00	-7.67
Middle Channel 600 (1880MHz)								
1880.00	5.65	H	4.15	2.68	10.43	11.90	33.00	-21.10
1880.00	25.19	V	17.44	2.68	10.43	25.19	33.00	-7.81
High Channel 1175 (1908.75MHz)								
1908.75	6.24	H	4.86	2.69	10.44	12.61	33.00	-20.39
1908.75	25.24	V	17.49	2.69	10.44	25.24	33.00	-7.76

CDMA 2000 1XEVD0 Rel-A BC0 Link

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 1013 (824.7MHz)								
824.70	-21.18	H	13.37	2.56	-0.02	10.79	38.50	-27.71
824.70	-5.62	V	29.69	2.56	-0.02	27.11	38.50	-11.39
Middle Channel 384 (836.52MHz)								
836.52	-23.79	H	10.97	2.59	0.10	8.48	38.50	-30.02
836.52	-5.93	V	29.69	2.59	0.10	27.20	38.50	-11.30
High Channel 777 (848.31MHz)								
848.31	-23.23	H	11.53	2.54	0.13	9.12	38.50	-29.38
848.31	-5.63	V	29.72	2.54	0.13	27.31	38.50	-11.19

CDMA 2000 1XEVD0 Rel-A BC1 Link

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 25(1851.25MHz)								
1851.25	4.20	H	2.78	2.67	10.40	10.51	33.00	-22.49
1851.25	19.34	V	17.73	2.67	10.40	25.46	33.00	-7.54
Middle Channel 600 (1880MHz)								
1880.00	8.70	H	7.27	2.68	10.43	15.02	33.00	-17.98
1880.00	19.27	V	17.64	2.68	10.43	25.39	33.00	-7.61
High Channel 1175 (1908.75MHz)								
1908.75	9.75	H	8.32	2.69	10.44	16.07	33.00	-16.93
1908.75	19.29	V	17.66	2.69	10.44	25.41	33.00	-7.59


4. Modulation Characteristic

4.1. Test Equipment

Modulation Characteristic / AC-6

Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2014.03.30
Radio Communication Tester	R&S	CMU 200	117088	2014.02.20
Dual Directional Coupler	Agilent	778D	20160	2014.03.30
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2014.03.30
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC6-TH	2014.01.11

4.2. Test Setup

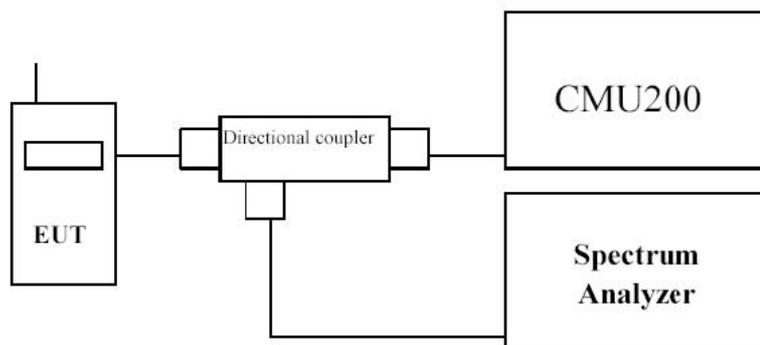

4.3. Limit

N/A

4.4. Uncertainty

The measurement uncertainty is defined as 0.1%

4.5. Test Result

The modulation of CDMA was verified and confirmed compliance with requirement.


5. Occupied Bandwidth

5.1. Test Equipment

Occupied Bandwidth / AC-6

Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2014.03.30
Radio Communication Tester	R&S	CMU 200	117088	2014.02.20
Dual Directional Coupler	Agilent	778D	20160	2014.03.30
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2014.03.30
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC6-TH	2014.01.11

5.2. Test Setup

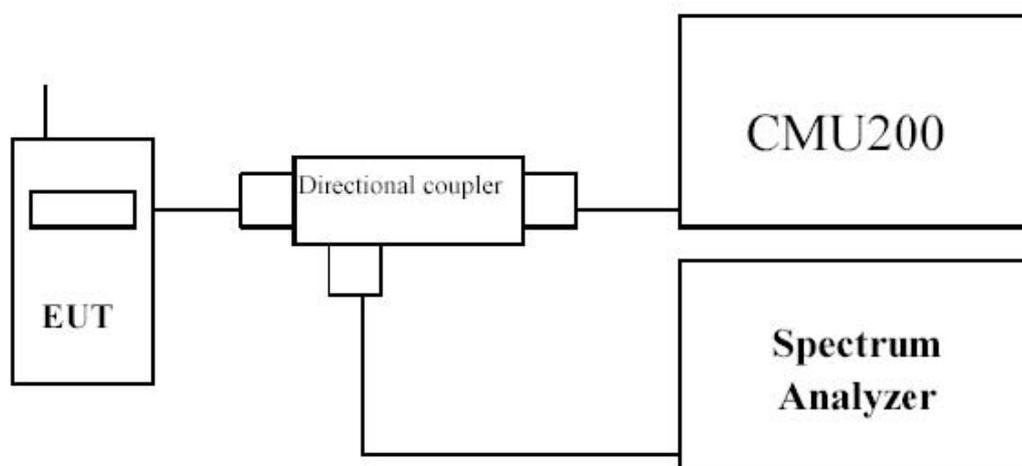

5.3. Limit

N/A

5.4. Test Procedure

Using Occupied Bandwidth measurement function of spectrum analyzer, and setting as follows:

For CDMA2000 1X BC0/BC1 and CDMA2000 1XEVD0 BC0/BC1 test --- RBW = 30 kHz and VBW = 100 kHz

5.5. Uncertainty

The measurement uncertainty is defined as ± 10 Hz

5.6. Test Result

Product	cdma2000 Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: CDMA 2000 1X BC0 Link		
Date of Test	2013/05/14	Test Site	AC-6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
1013	824.70	1425.0	1275.3
384	836.52	1448.0	1283.5
777	848.31	1435.0	1275.8

Figure Channel 1013 (824.70MHz)

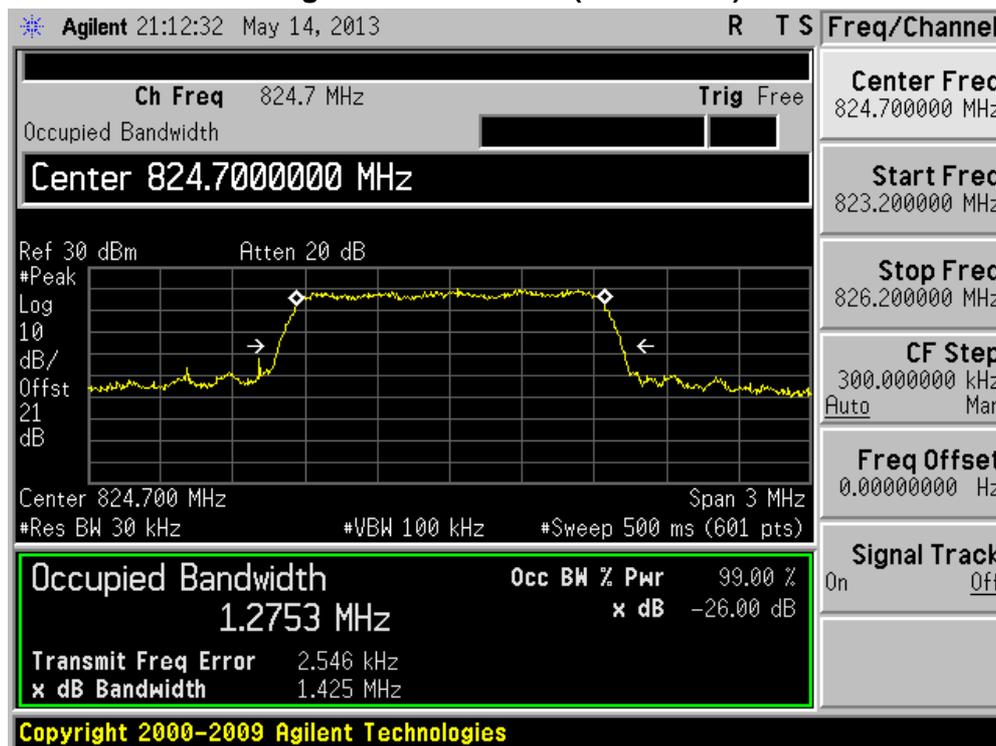


Figure Channel 384 (836.52MHz)


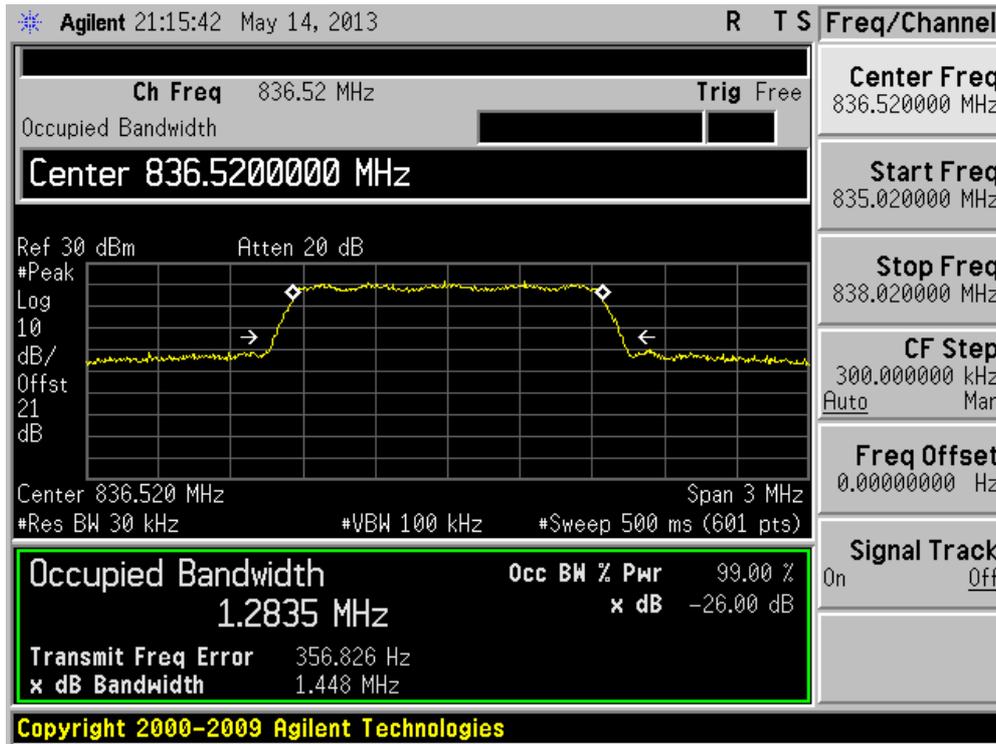


Figure Channel 777 (848.31MHz)

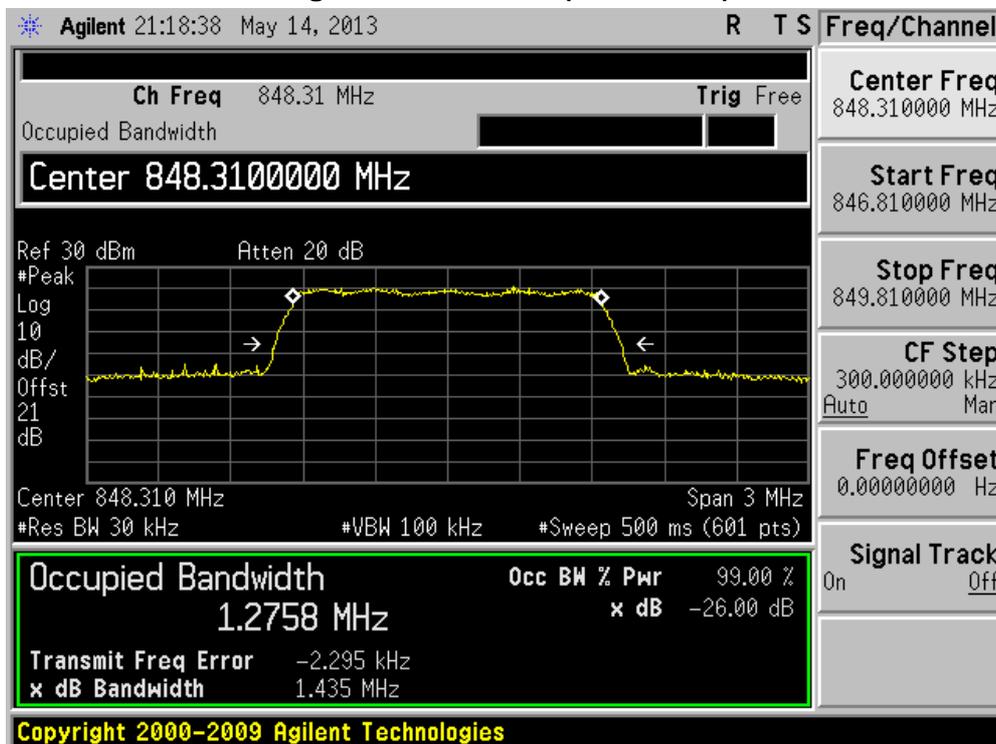

Product	cdma2000 Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 2: CDMA 2000 1X BC1 Link		
Date of Test	2013/05/14	Test Site	AC-6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
25	1851.25	1431.0	1277.5
600	1880.00	1420.0	1276.8
1175	1908.75	1429.0	1280.6

Figure Channel 25 (1851.25MHz)

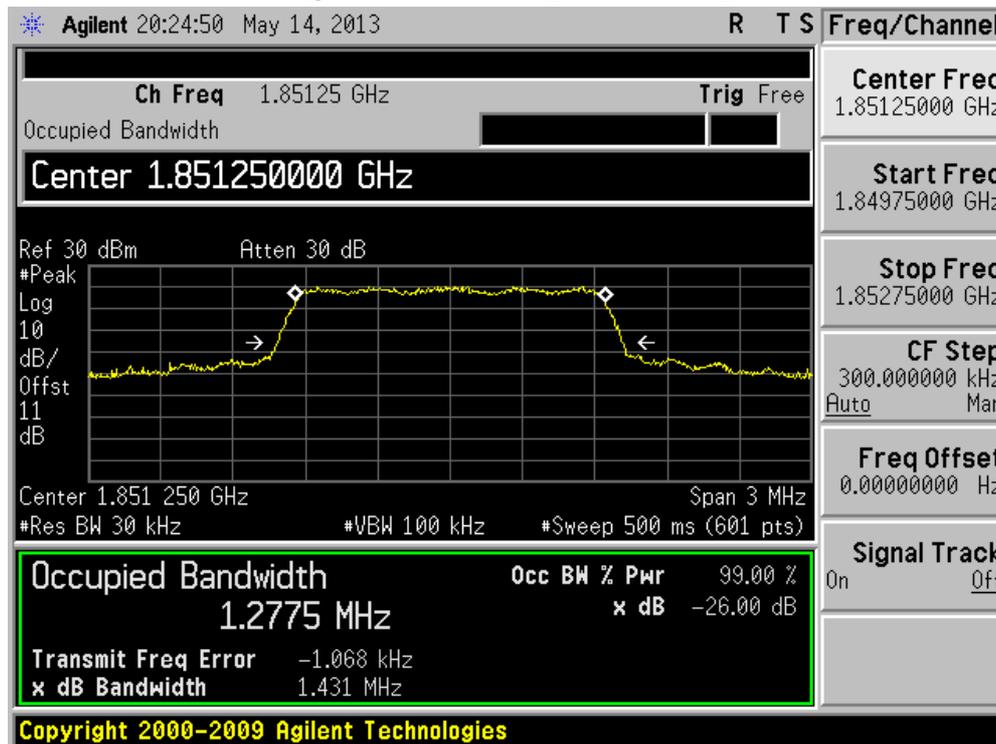


Figure Channel 600 (1880MHz)


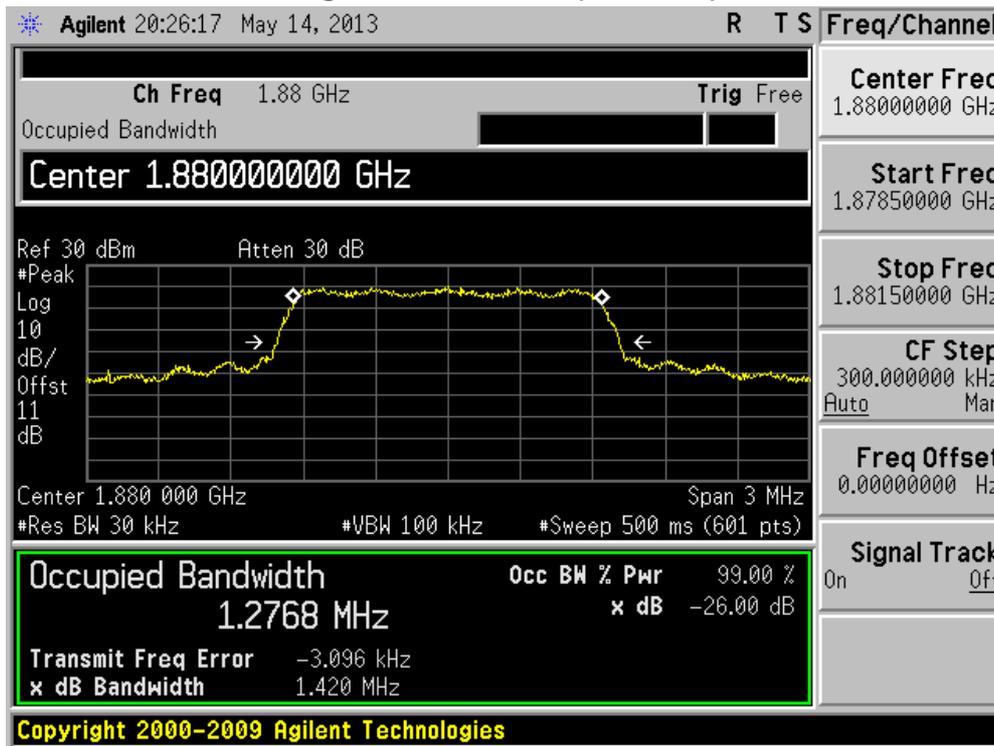


Figure Channel 1175 (1908.75MHz)

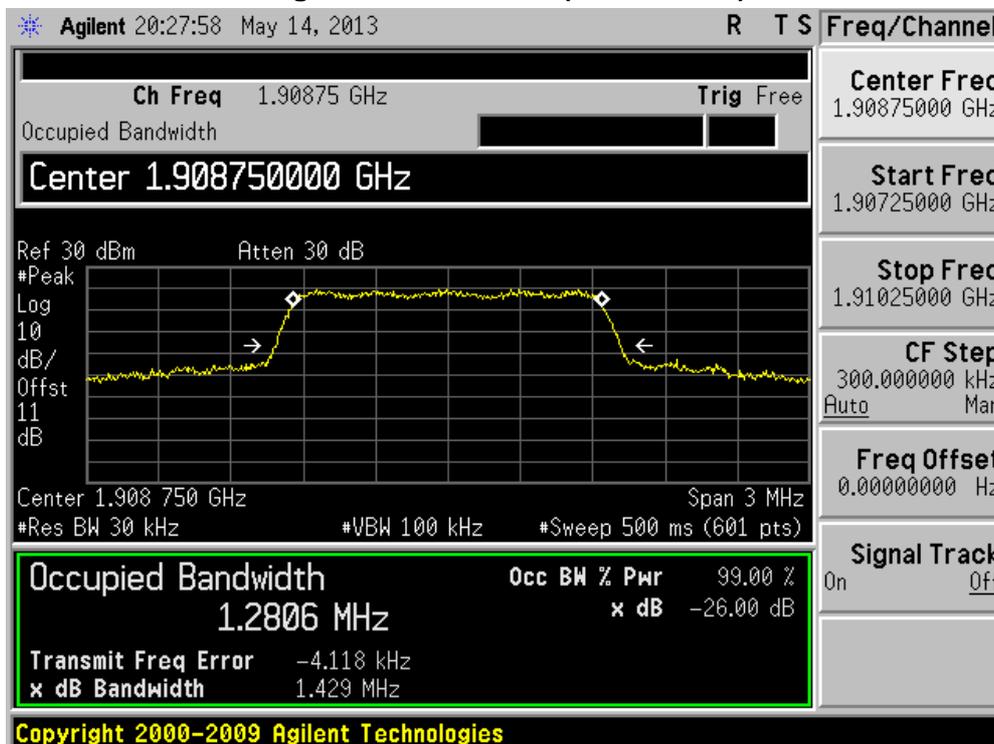

Product	cdma2000 Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 3: CDMA 2000 1XEVD0 Rel-0 BC0 Link		
Date of Test	2013/05/15	Test Site	AC-6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
1013	824.70	1419.0	1273.2
384	836.52	1427.0	1274.7
777	848.31	1419.0	1271.8

Figure Channel 1013 (824.70MHz)

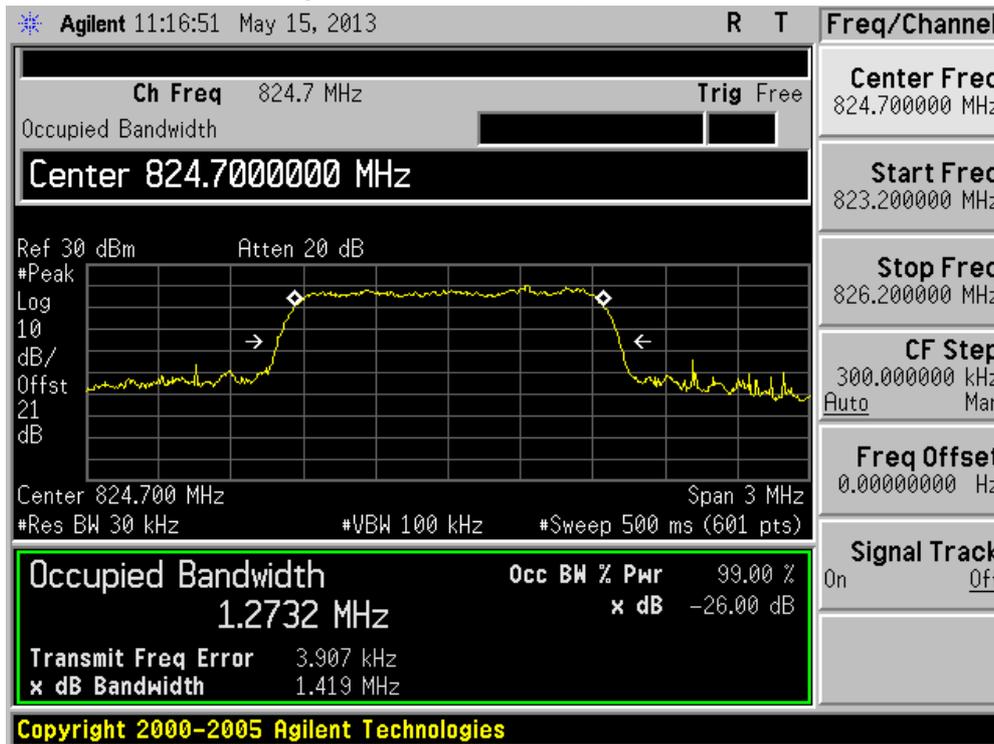


Figure Channel 384 (836.52MHz)


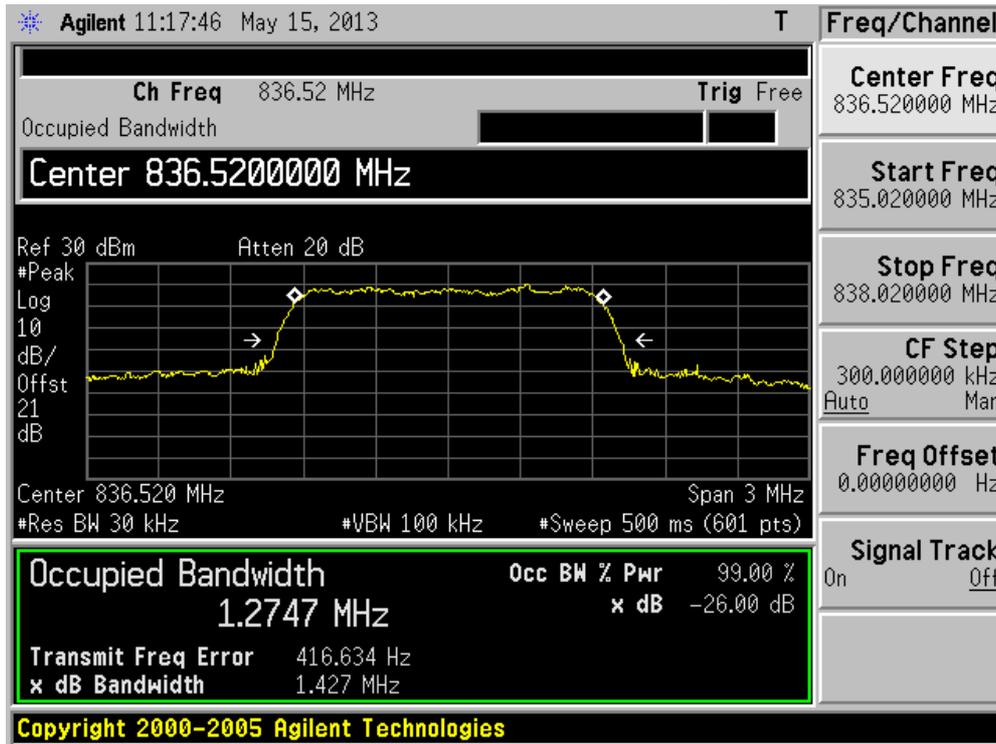


Figure Channel 777 (848.31MHz)

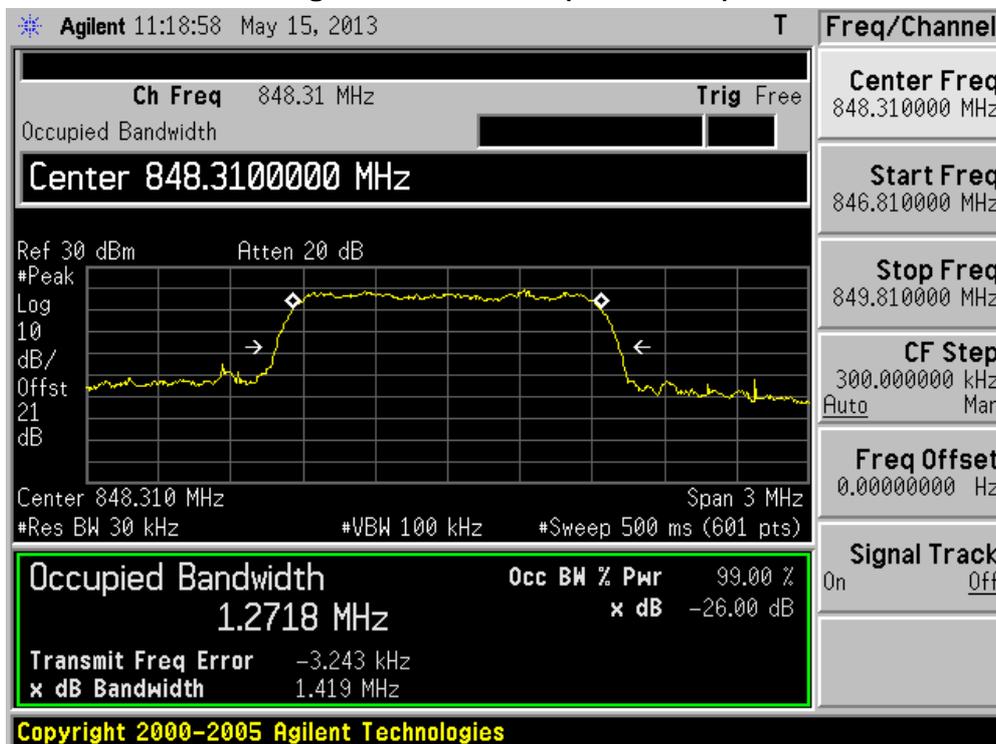

Product	cdma2000 Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 4 :CDMA 2000 1XEVD0 Rel-0 BC1 Link		
Date of Test	2013/05/15	Test Site	AC-6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
25	1851.25	1432.0	1273.7
600	1880.00	1434.0	1274.2
1175	1908.75	1436.0	1274.9

Figure Channel 25 (1851.25MHz)

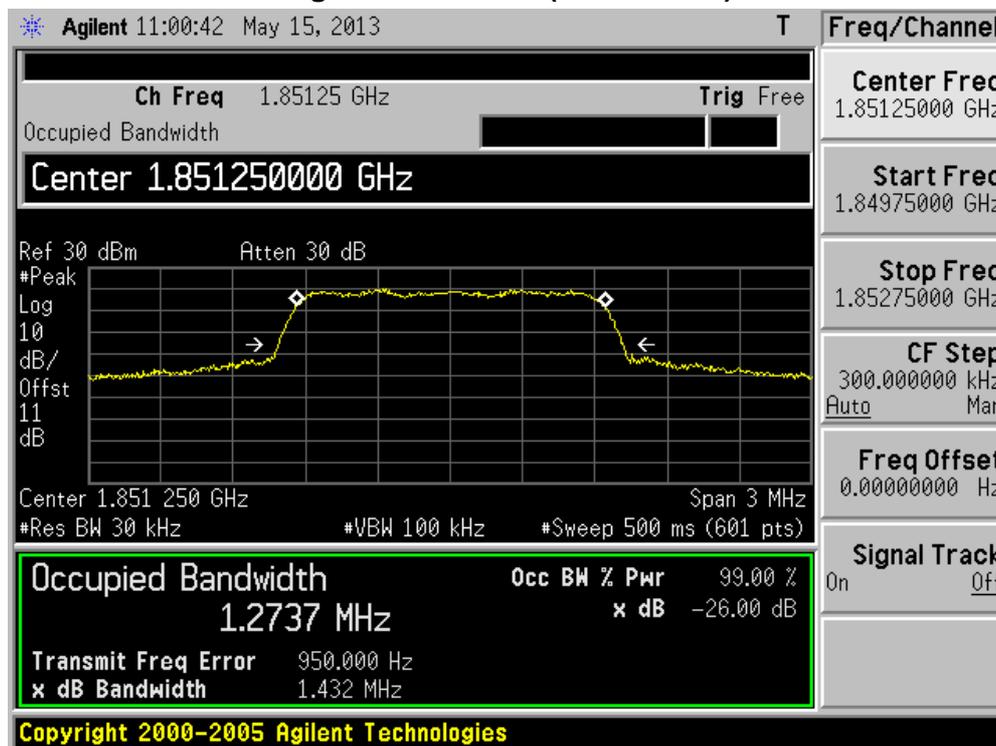


Figure Channel 600 (1880MHz)


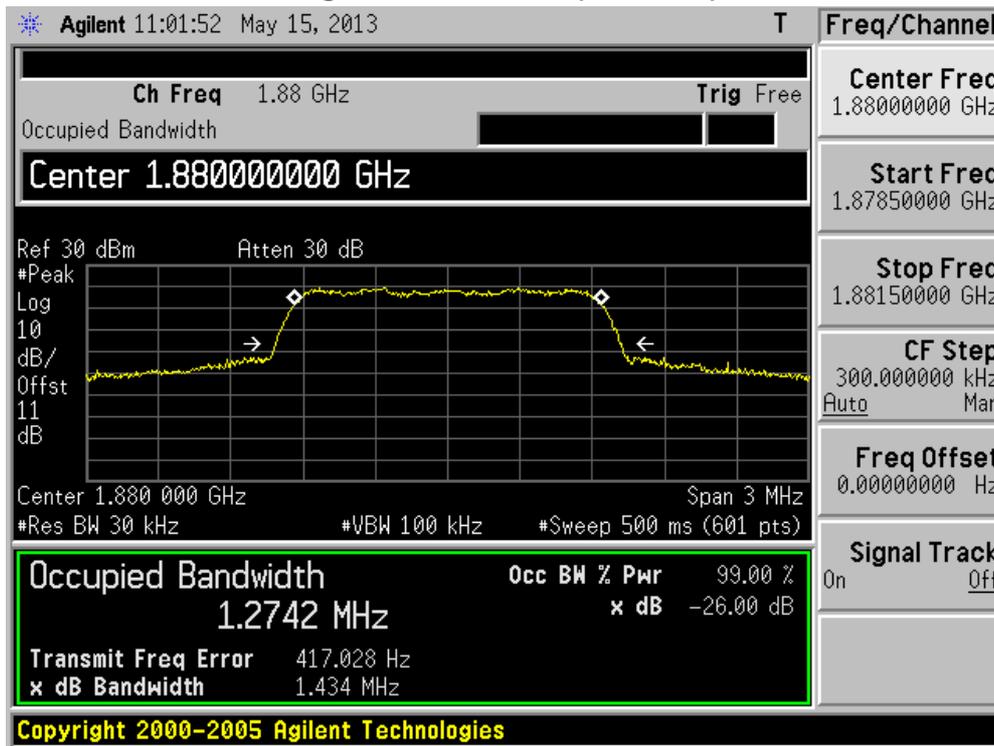


Figure Channel 1175 (1908.75MHz)

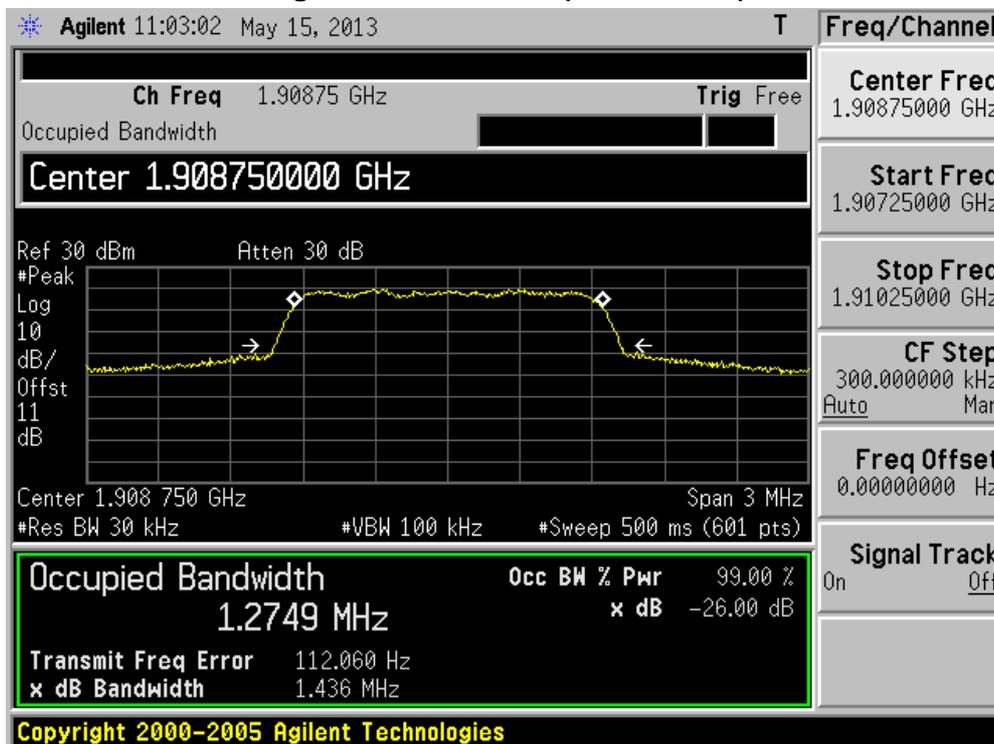

Product	cdma2000 Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 5 :CDMA 2000 1XEVD0 Rel-A BC0 Link		
Date of Test	2013/05/15	Test Site	AC-6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
1013	824.70	1420.0	1273.3
384	836.52	1430.0	1275.0
777	848.31	1424.0	1270.9

Figure Channel 1013 (824.70MHz)

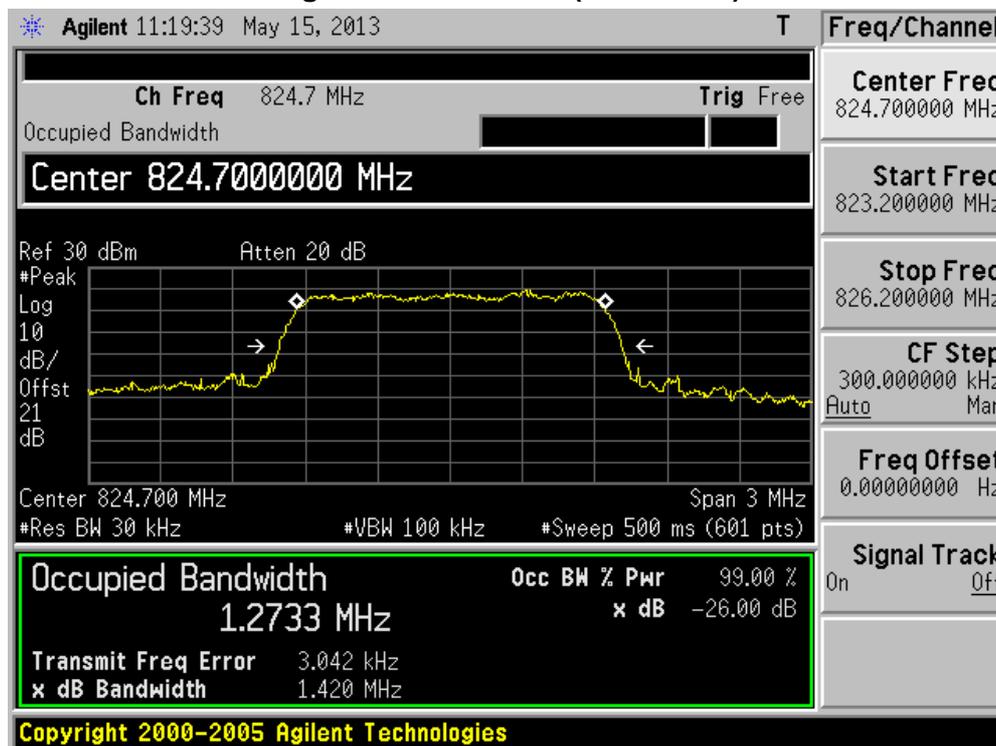


Figure Channel 384 (836.52MHz)


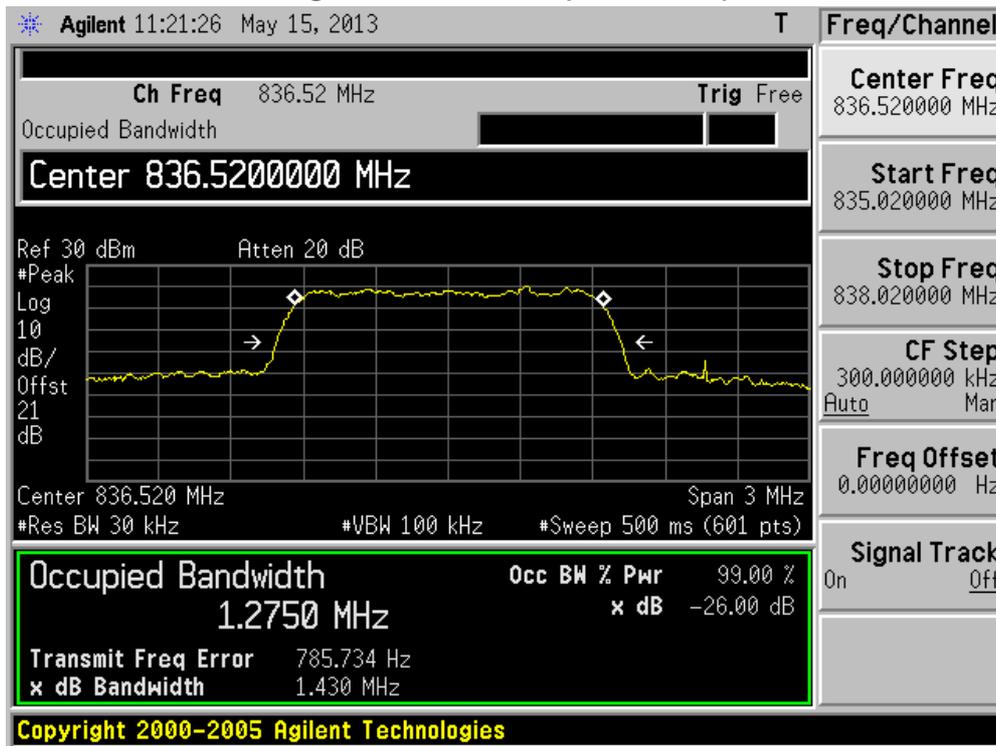


Figure Channel 777 (848.31MHz)

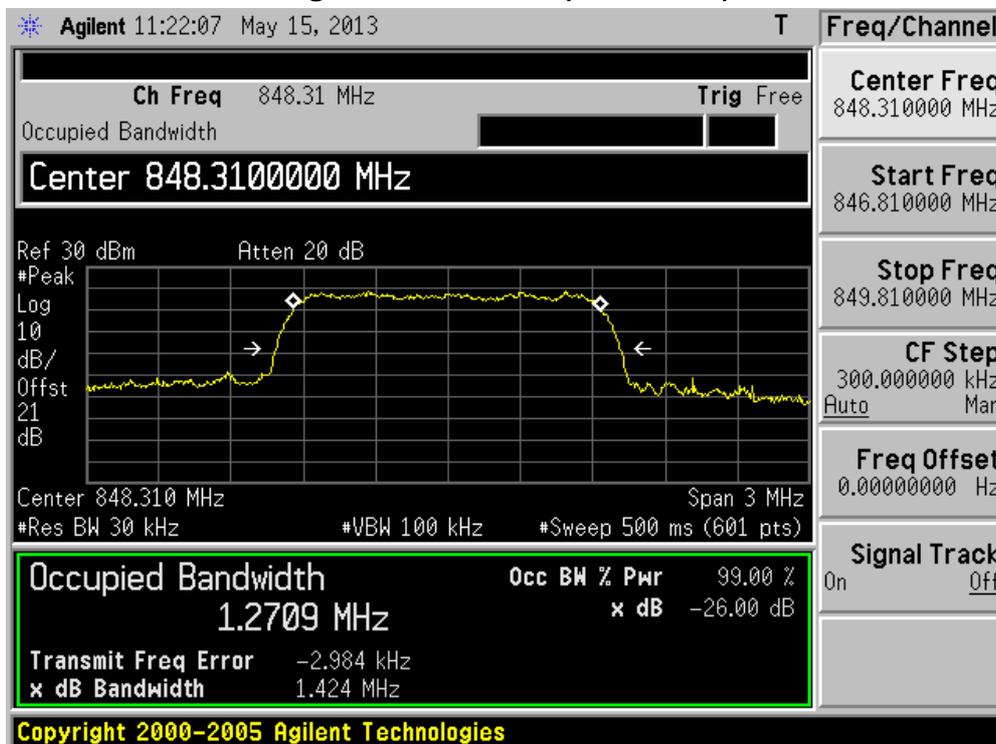

Product	cdma2000 Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 6: CDMA 2000 1XEVD0 Rel-A BC1 Link		
Date of Test	2013/05/14	Test Site	AC-6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
25	1851.25	1429.0	1271.1
600	1880.00	1428.0	1272.2
1175	1908.75	1439.0	1275.0

Figure Channel 25 (1851.25MHz)

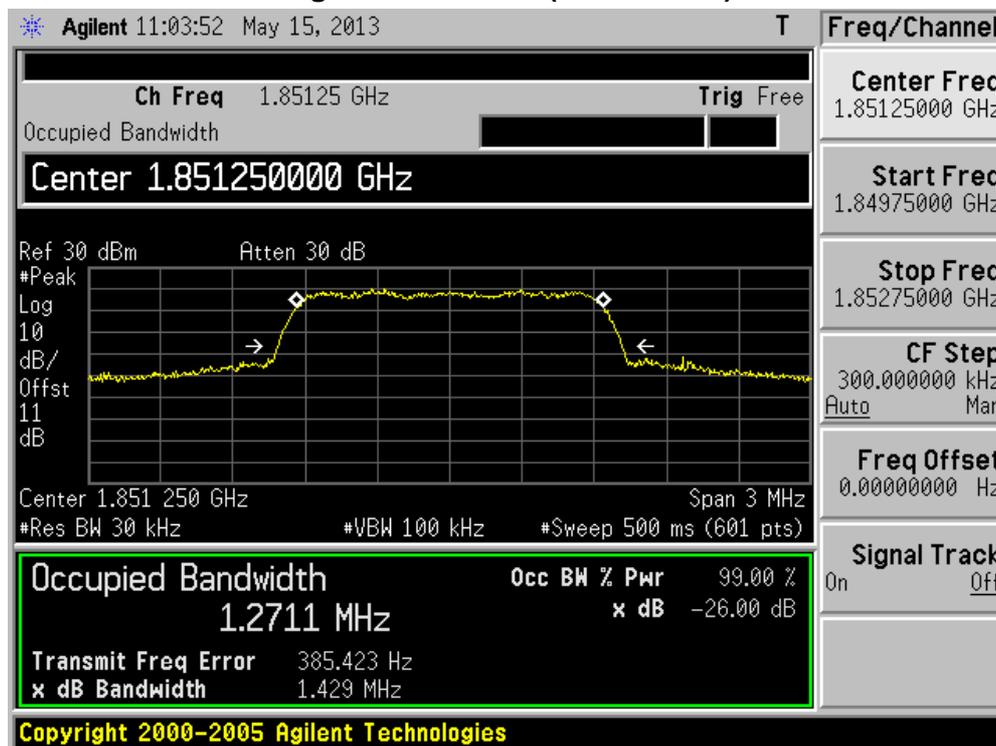


Figure Channel 600 (1880MHz)


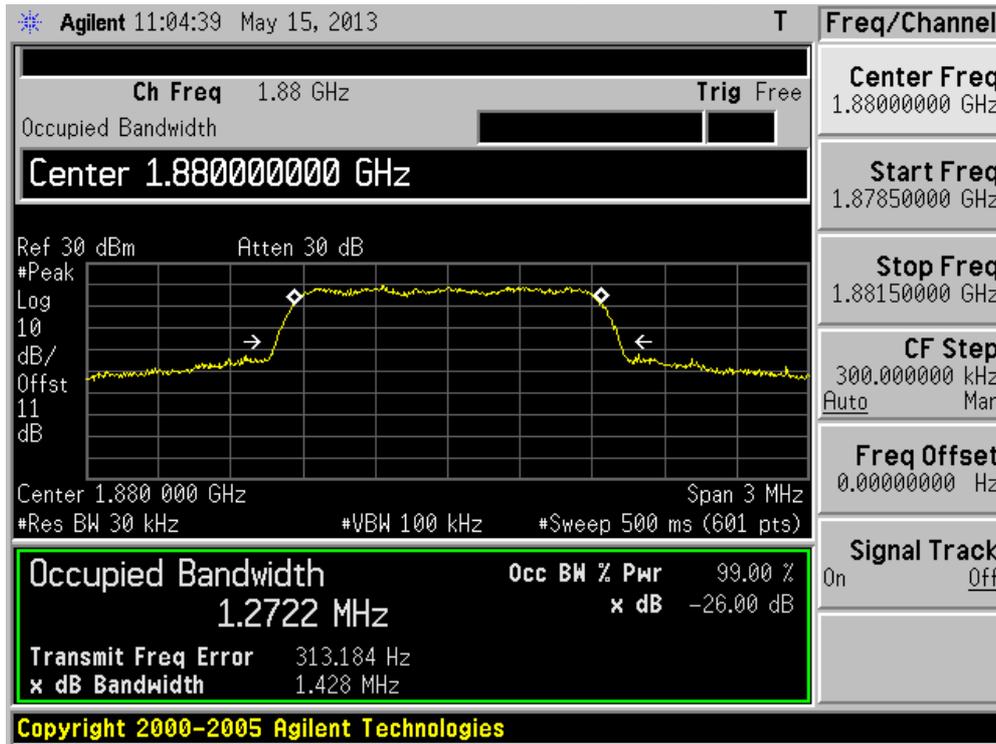


Figure Channel 1175 (1908.75MHz)

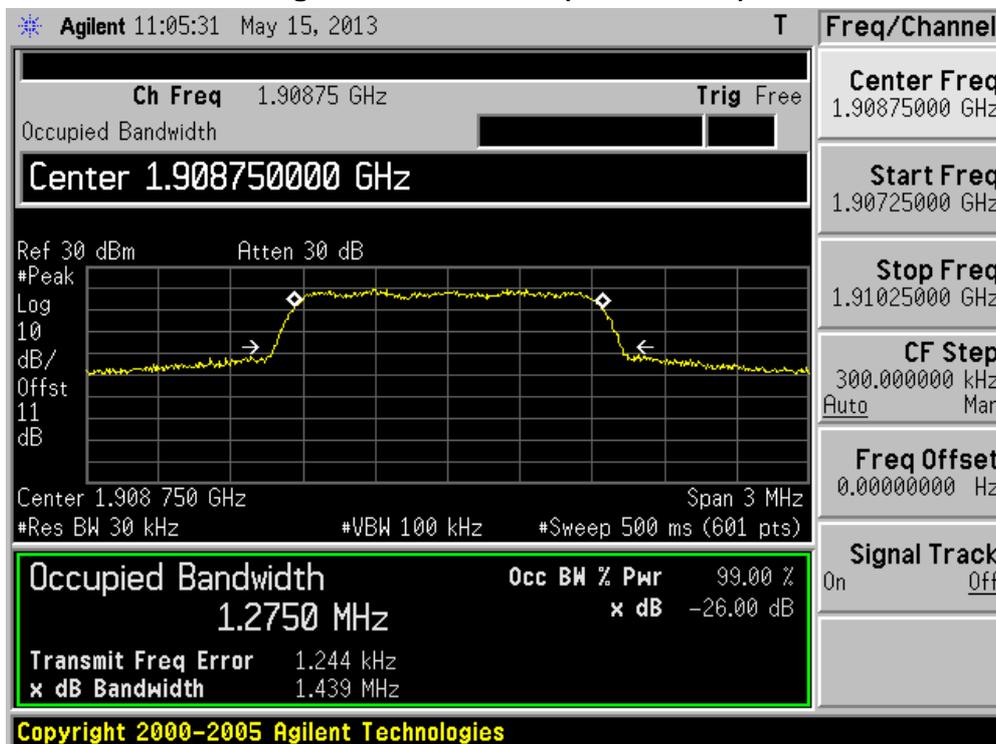


6. Spurious Emission At Antenna Terminals (+/- 1MHz)

6.1. Test Equipment

Spurious Emission At Antenna Terminals (+/- 1MHz) / AC-6

Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2014.03.30
Radio Communication Tester	R&S	CMU 200	117088	2014.02.20
Dual Directional Coupler	Agilent	778D	20160	2014.03.30
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2014.03.30
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC6-TH	2014.01.11

6.2. Test Setup

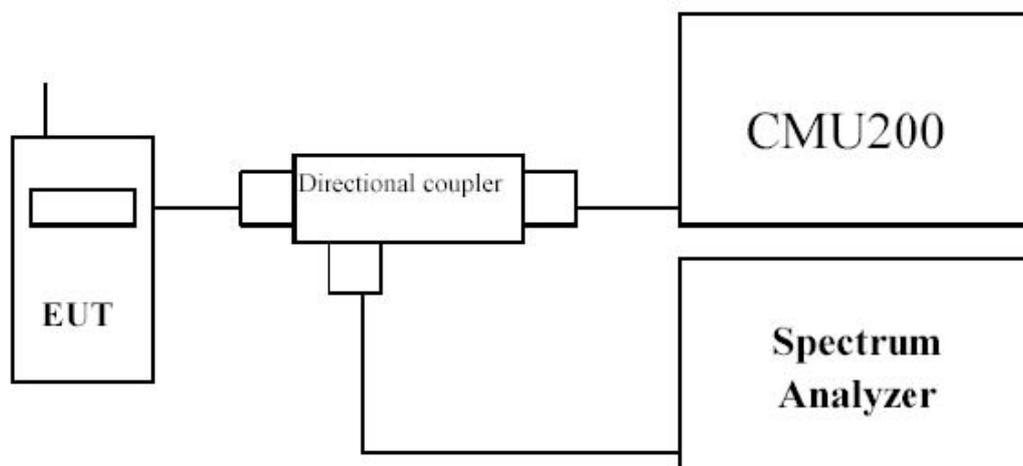

6.3. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

6.4. Test Procedure

In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

6.5. Uncertainty

The measurement uncertainty is defined as ± 1.2 dB.

6.6. Test Result

Product	cdma2000 Mobile Phone		
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)		
Test Mode	Mode 1: CDMA 2000 1X BC0 Link		
Date of Test	2013/05/15	Test Site	AC-6

Figure Channel 1013 (824.70MHz)


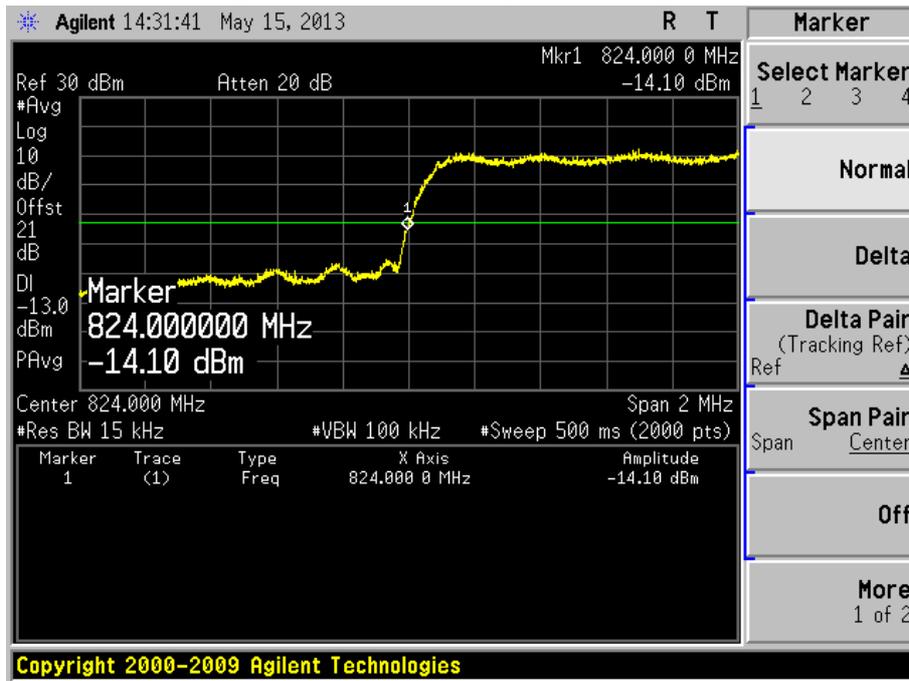


Figure Channel 777 (848.31MHz)

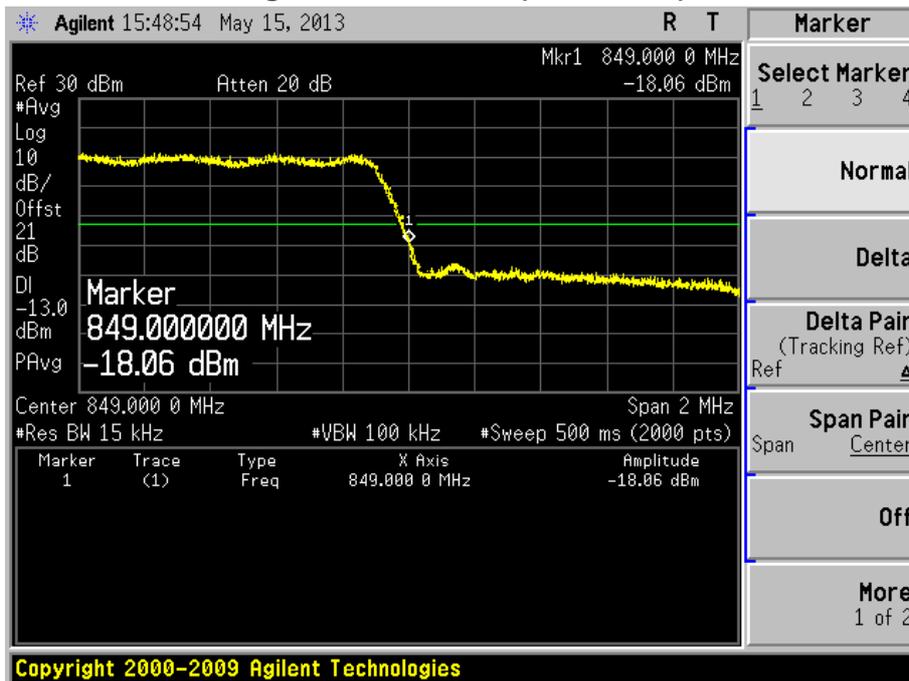

Product	cdma2000 Mobile Phone		
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)		
Test Mode	Mode 2: CDMA 2000 1X BC1 Link		
Date of Test	2013/05/15	Test Site	AC-6

Figure Channel 25 (1851.25MHz)


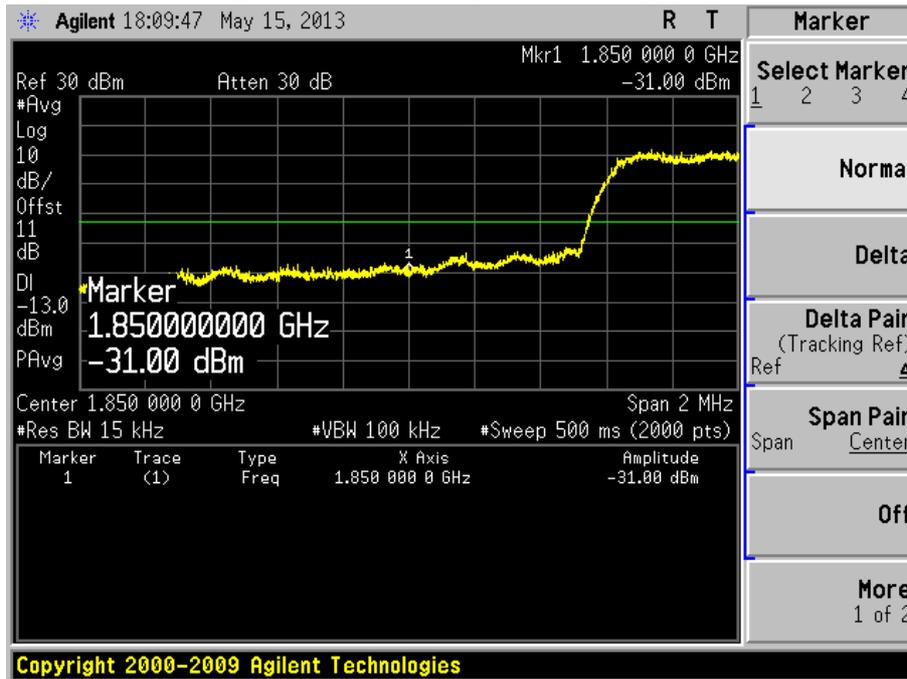


Figure Channel 1175 (1908.75MHz)

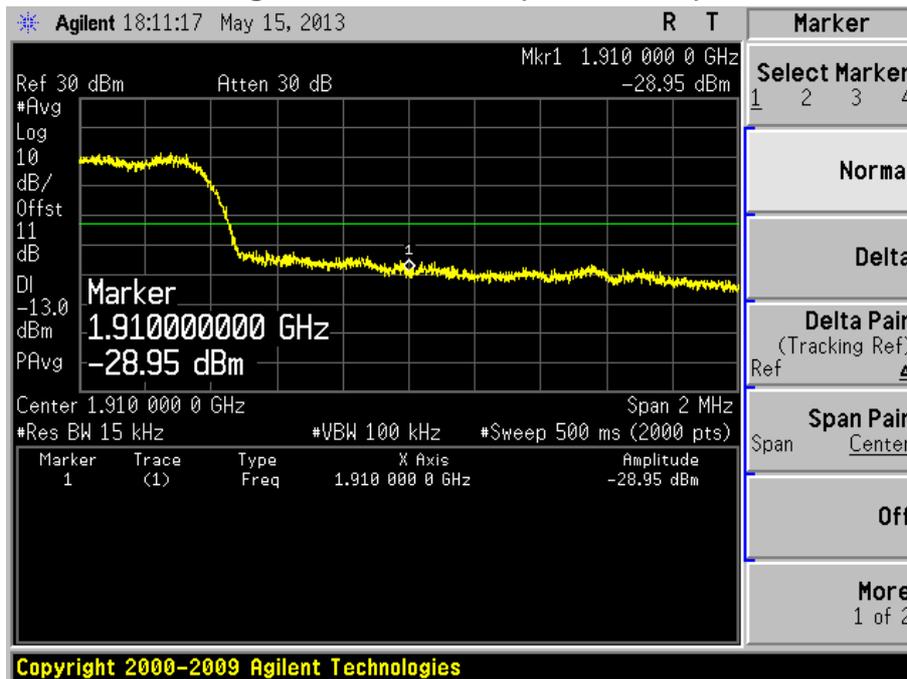

Product	cdma2000 Mobile Phone		
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)		
Test Mode	Mode 3: CDMA 2000 1XEVD0 Rel 0 BC0 Link		
Date of Test	2013/05/15	Test Site	AC-6

Figure Channel 1013 (824.70MHz)


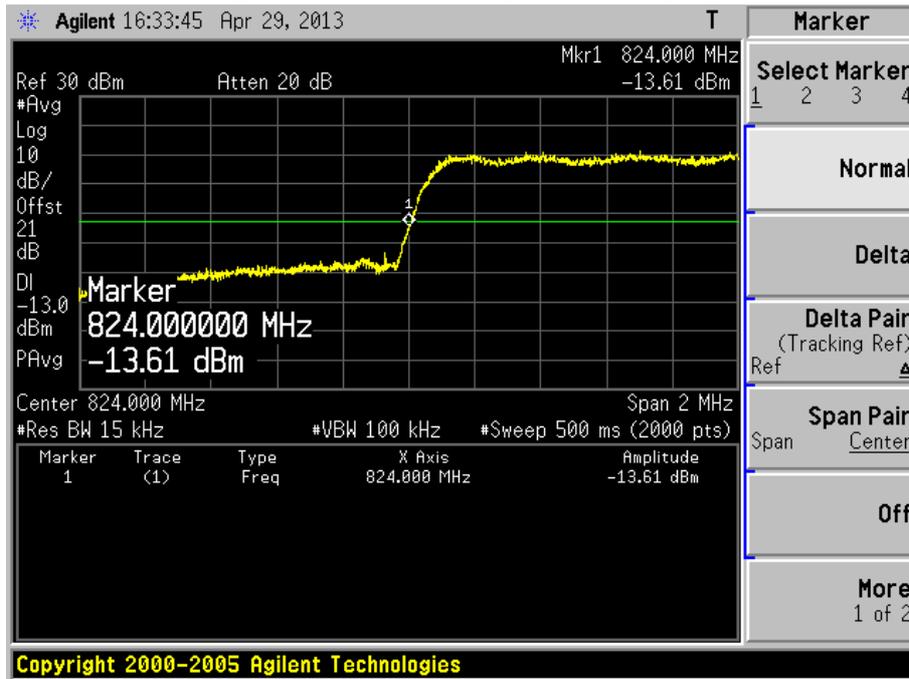


Figure Channel 777 (848.31MHz)

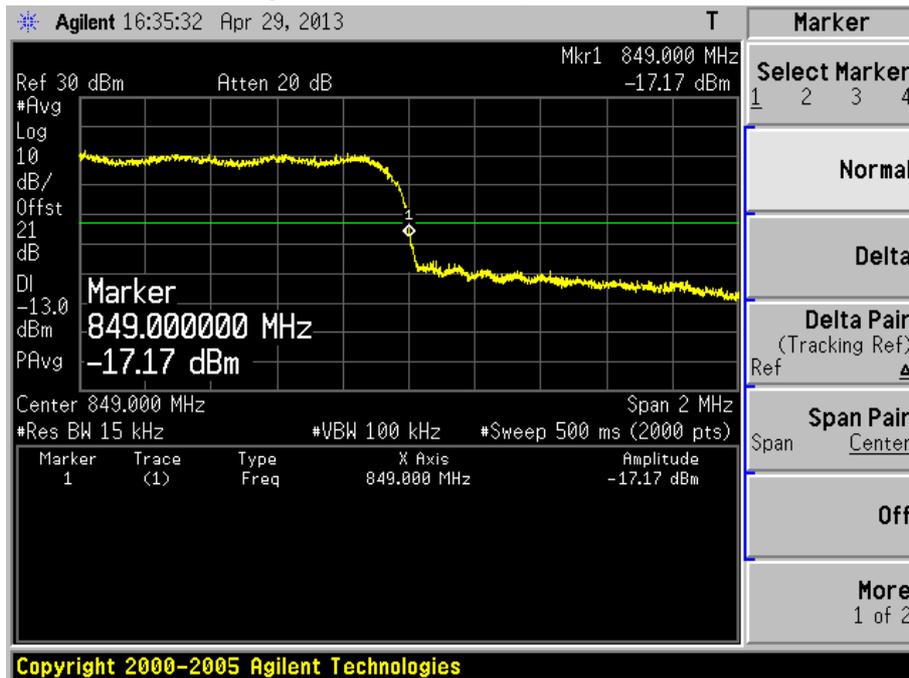

Product	cdma2000 Mobile Phone		
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)		
Test Mode	Mode 4: CDMA 2000 1XEVD0 Rel 0 BC1 Link		
Date of Test	2013/05/15	Test Site	AC-6

Figure Channel 25 (1851.25MHz)


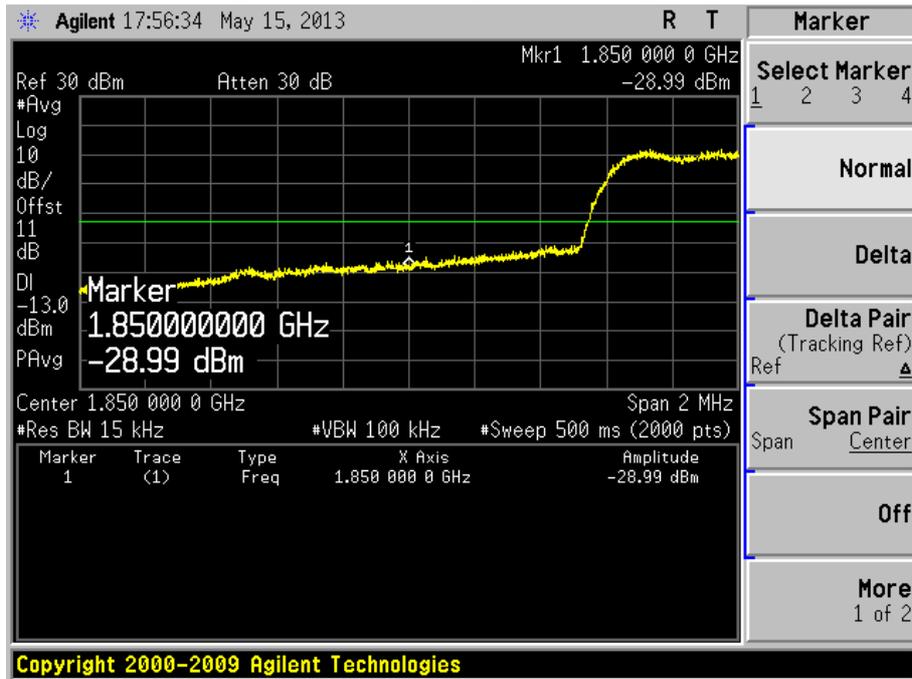


Figure Channel 1175 (1908.75MHz)

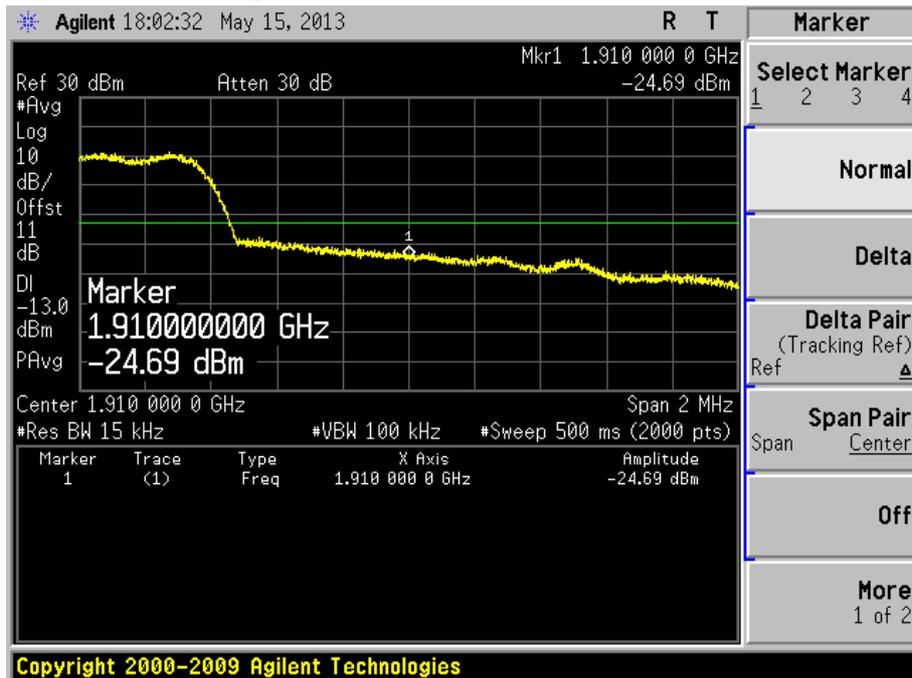

Product	cdma2000 Mobile Phone		
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)		
Test Mode	Mode 5: CDMA 2000 1XEVD0 Rel A BC0 Link		
Date of Test	2013/05/15	Test Site	AC-6

Figure Channel 1013 (824.70MHz)


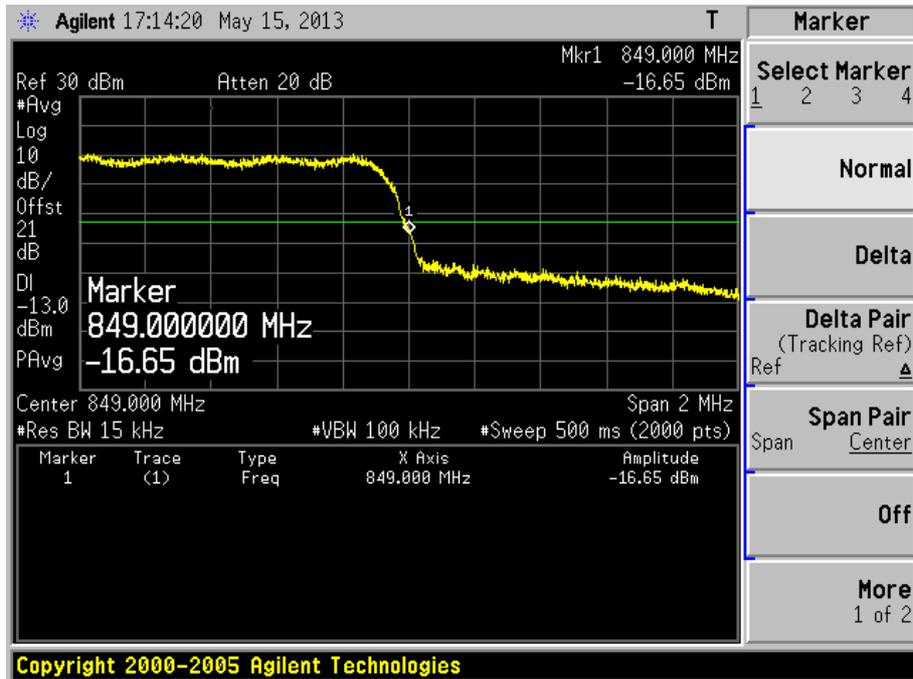


Figure Channel 777 (848.31MHz)

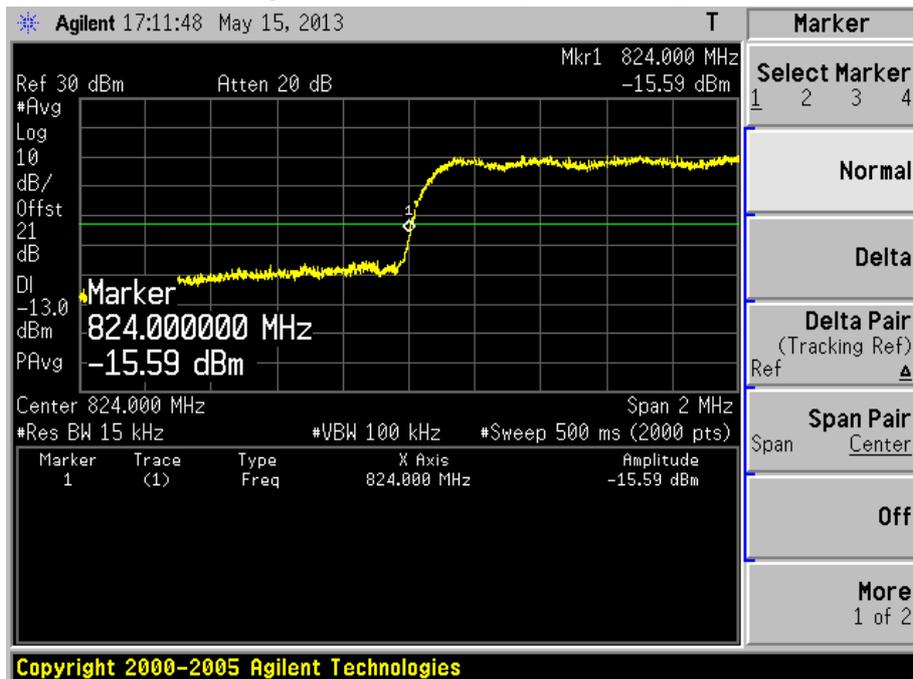

Product	cdma2000 Mobile Phone		
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)		
Test Mode	Mode 6: CDMA 2000 1XEVD0 Rel A BC1 Link		
Date of Test	2013/05/15	Test Site	AC-6

Figure Channel 25 (1851.25MHz)


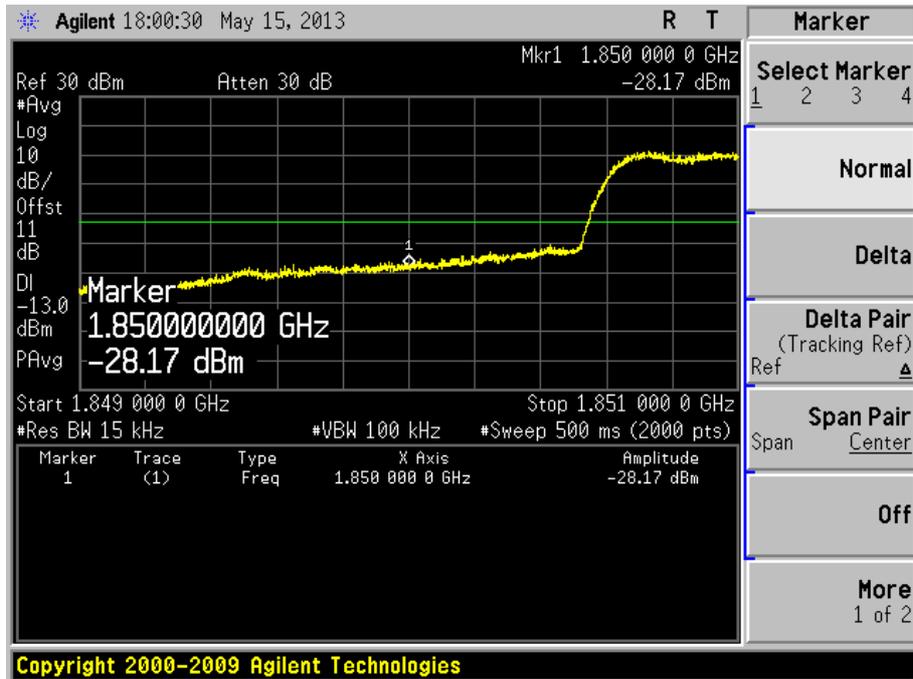


Figure Channel 1175 (1908.75MHz)

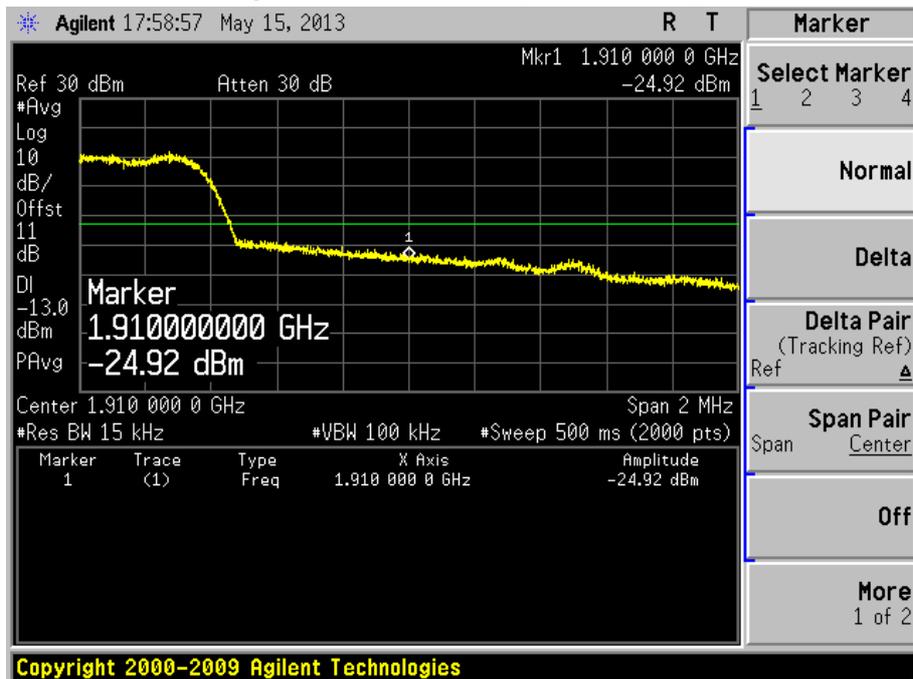

7. Spurious Emission


7.1. Test Equipment

Spurious Emission / AC-5


Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2014.03.30
Radio Communication Tester	R&S	CMU 200	117088	2014.03.30
Dual Directional Coupler	Agilent	778D	20160	2014.03.30
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2014.03.30
PSG Analog Signal Generator	Agilent	E8257D	MY44321116	2014.03.30
Preamplifier	QuieTek	AP-025C	CHM-0503006	2014.04.11
Preamplifier	Miteq	NSP1800-25	1364185	2014.05.03
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2013.10.15
Half Wave Tuned Dipole Antenna	COM-POWER	AD-100	40137	2013.11.24
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	737	2013.11.24
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	499	2014.06.08
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC5-TH	2014.01.11

7.2. Test Setup


Conducted Spurious Emission Measurement:

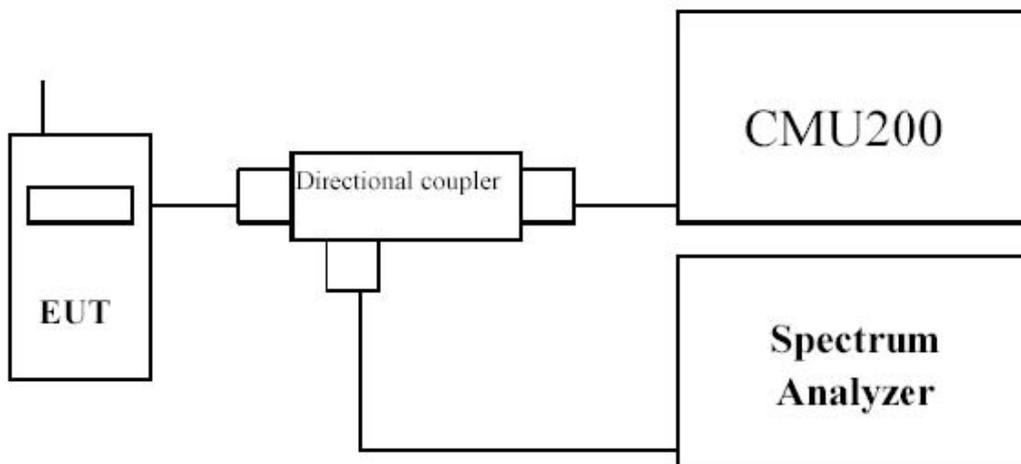

Radiated Spurious Measurement: below 1GHz

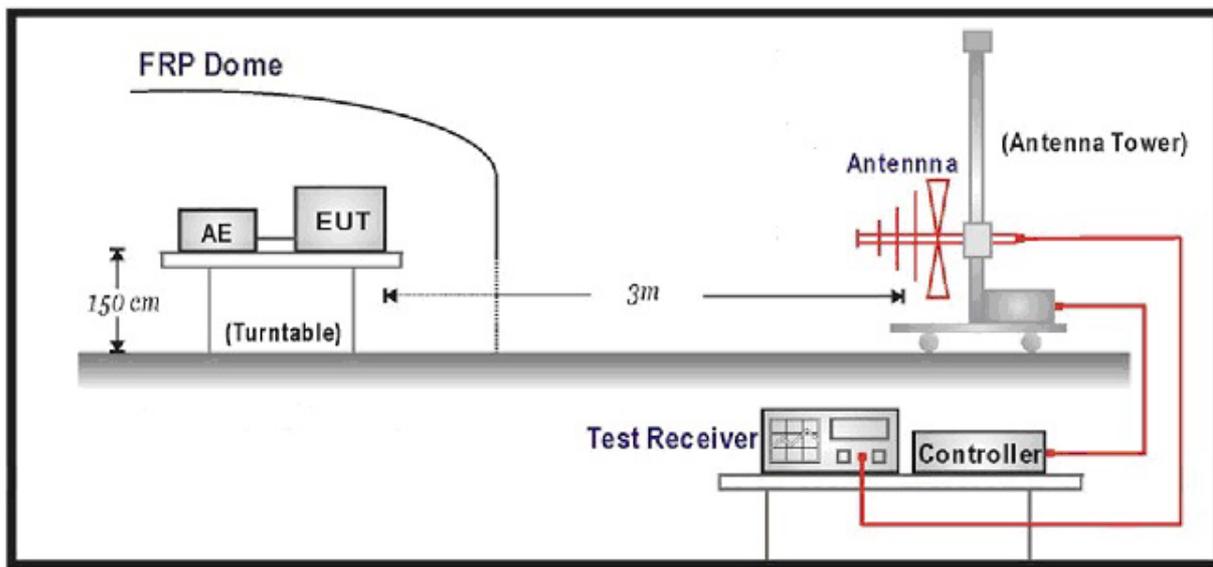

Radiated Spurious Measurement: above 1GHz

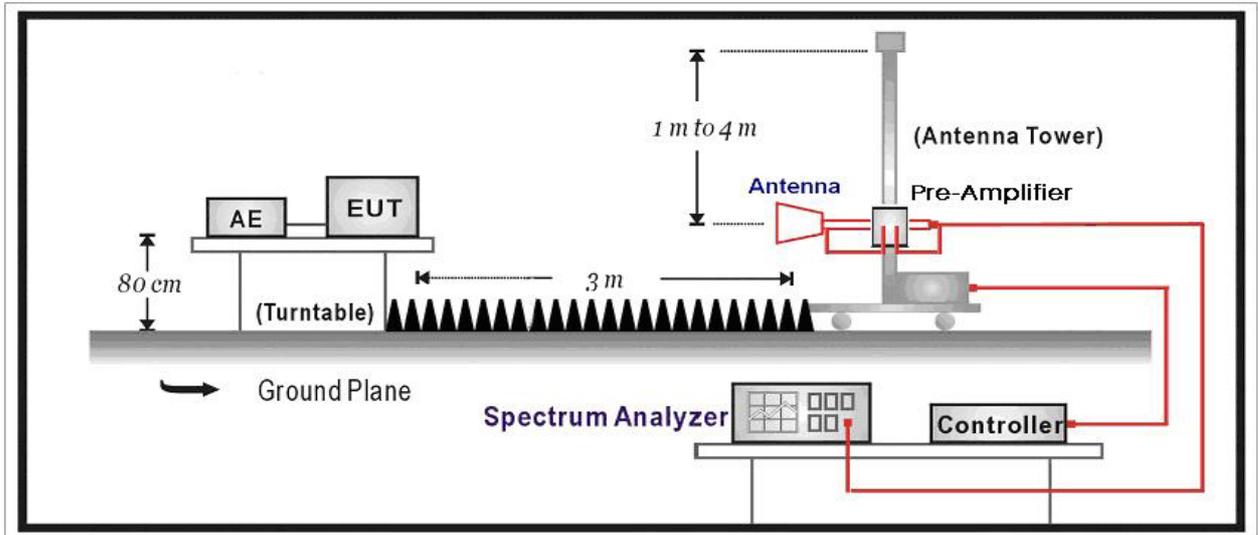

7.3. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

7.4. Test Procedure

Conducted Spurious Measurement:

- a) Place the EUT on a bench and set it in transmitting mode.
- b) Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- c) EUT Communicate with CMU200, then select a channel for testing.
- d) Add a correction factor to the display of spectrum, and then test.
- e) The resolution bandwidth of the spectrum analyzer was set at 1 MHz, sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

Radiated Spurious Measurement:

- a) The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b) The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c) The output of the test antenna shall be connected to the measuring receiver.

- d) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- v) The maximum signal level detected by the measuring receiver shall be noted.
- h) The transmitter shall be replaced by a substitution antenna.
- i) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- j) The substitution antenna shall be connected to a calibrated signal generator.
- k) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- l) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- m) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- n) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- o) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- p) The frequency range was checked up to 10th harmonic.
- q) Test site anechoic chamber refer to ANSI C63.4: 2009



7.5. Uncertainty

The measurement uncertainty is defined as 3.2 dB for Radiated Power Measurement.



7.6. Test Result

Product	cdma2000 Mobile Phone		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 1: CDMA 2000 1X BC0 Link Link		
Date of Test	2013/05/15	Test Site	TR-8



Low Channel 1013(824.7MHz)

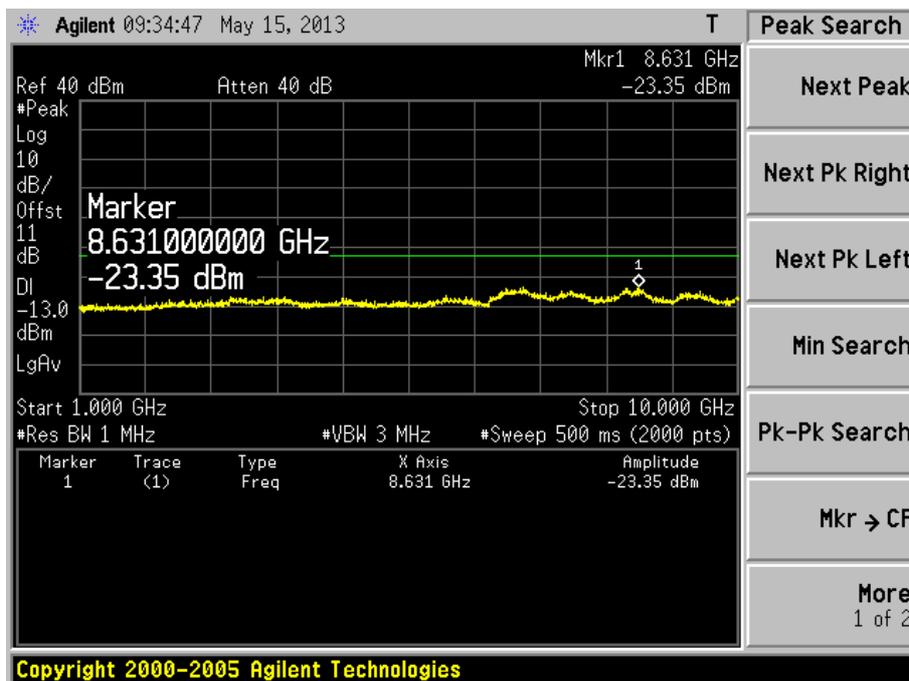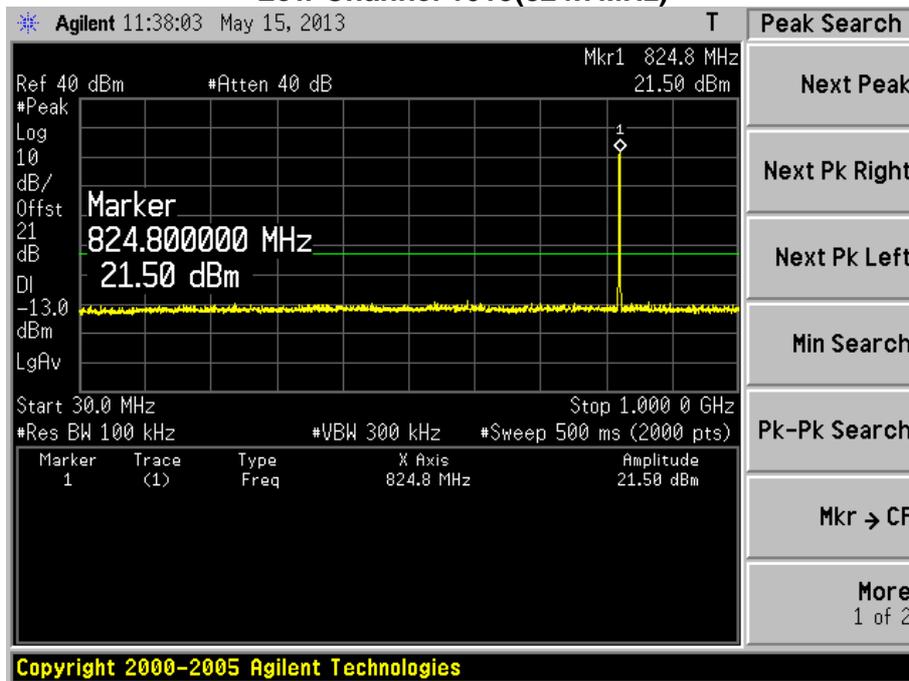

Mid Channel 384(836.52MHz)

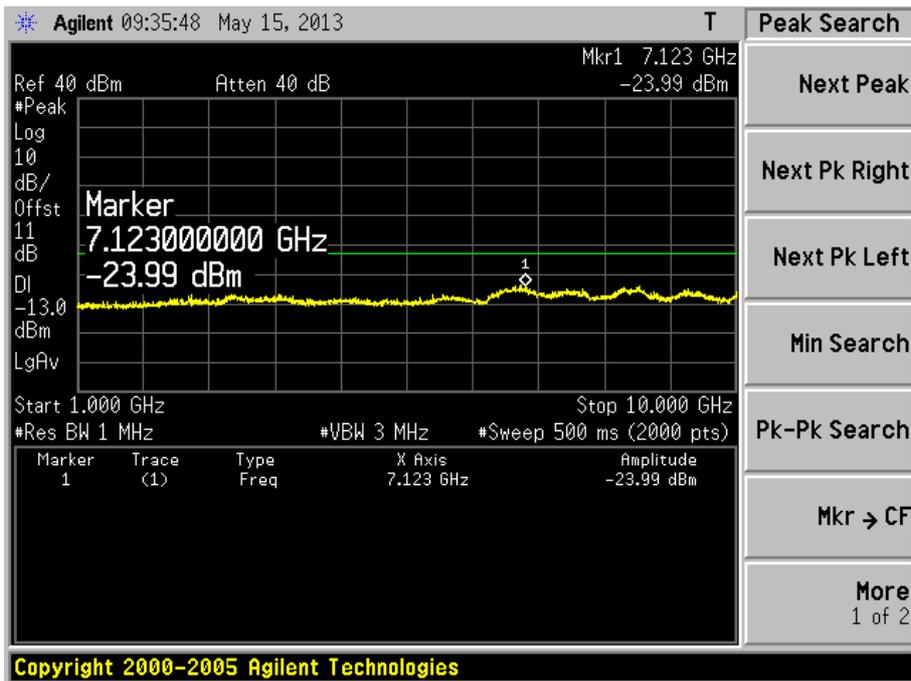
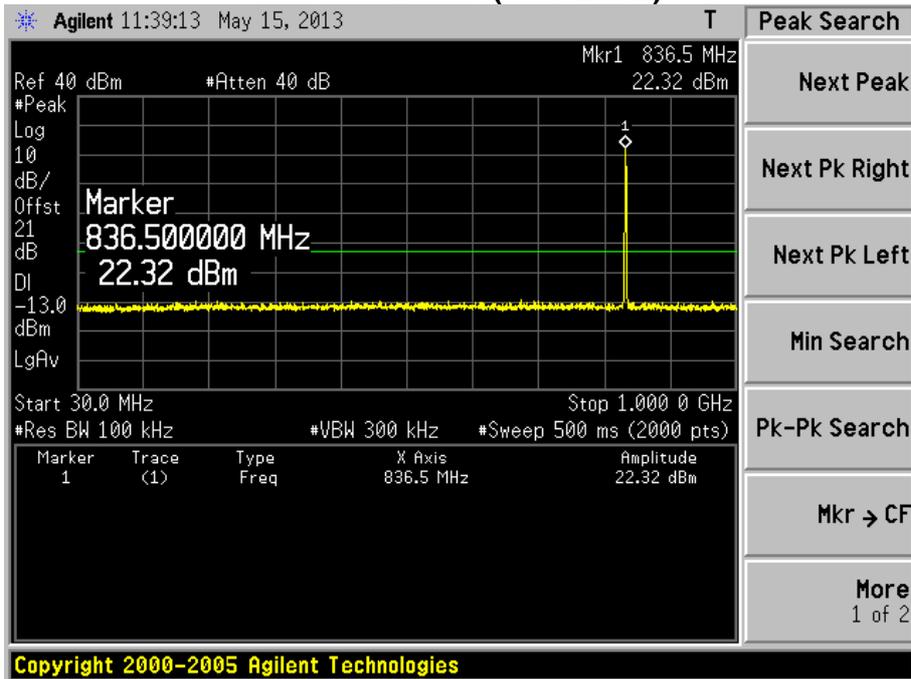


High Channel 777(848.31MHz)

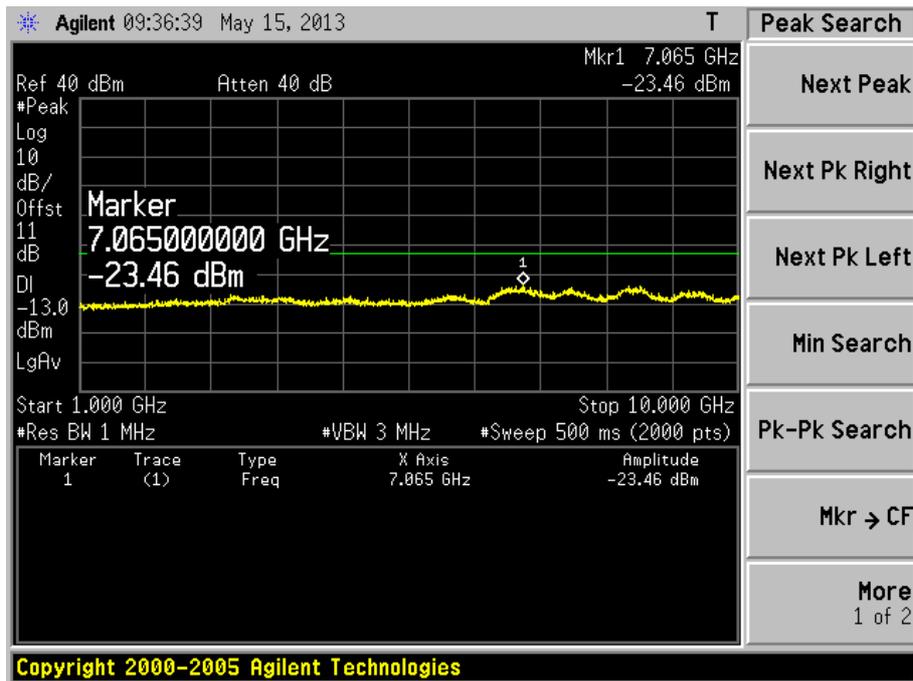
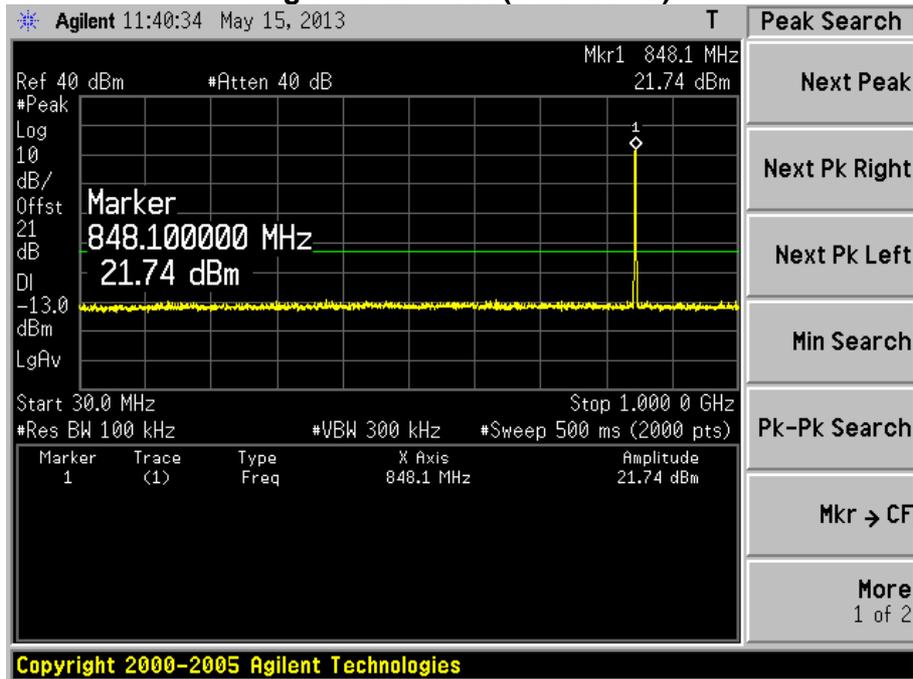


Product	cdma2000 Mobile Phone		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 2: CDMA 2000 1X BC1 Link		
Date of Test	2013/05/15	Test Site	TR-8



Low Channel 25(1851.25MHz)

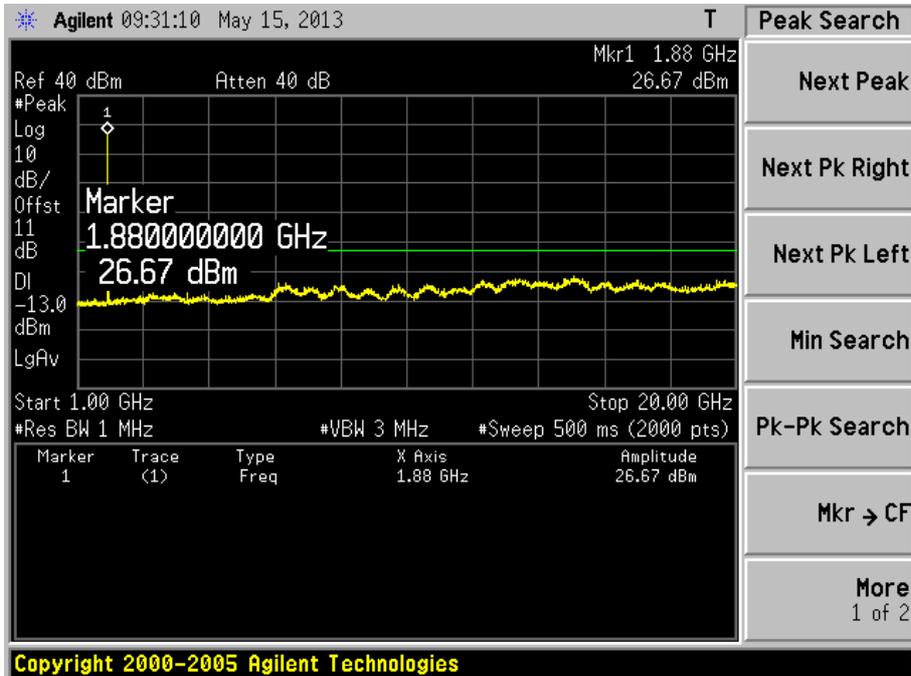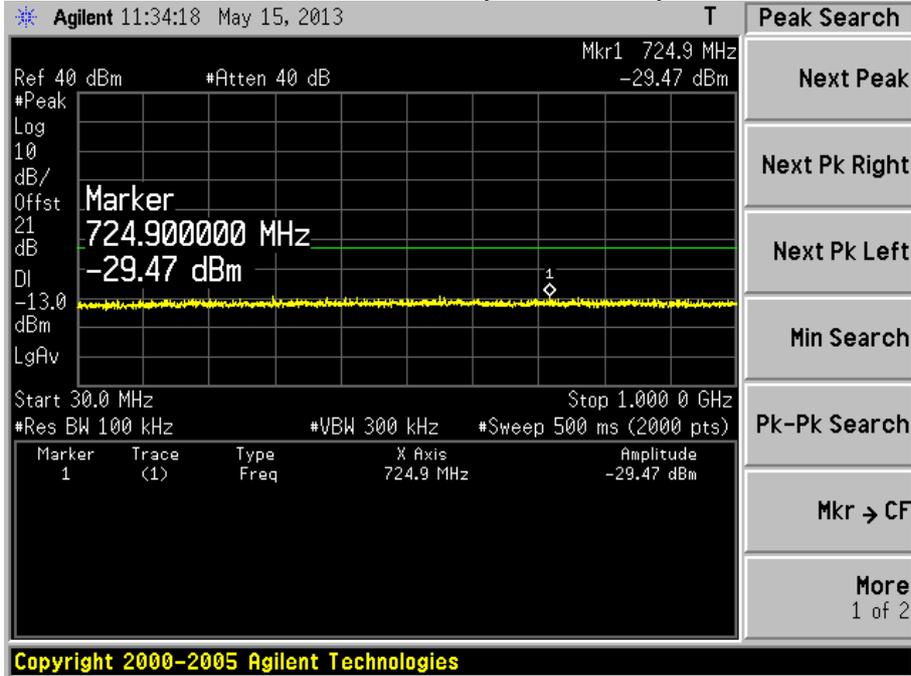

Mid Channel 600(1880MHz)

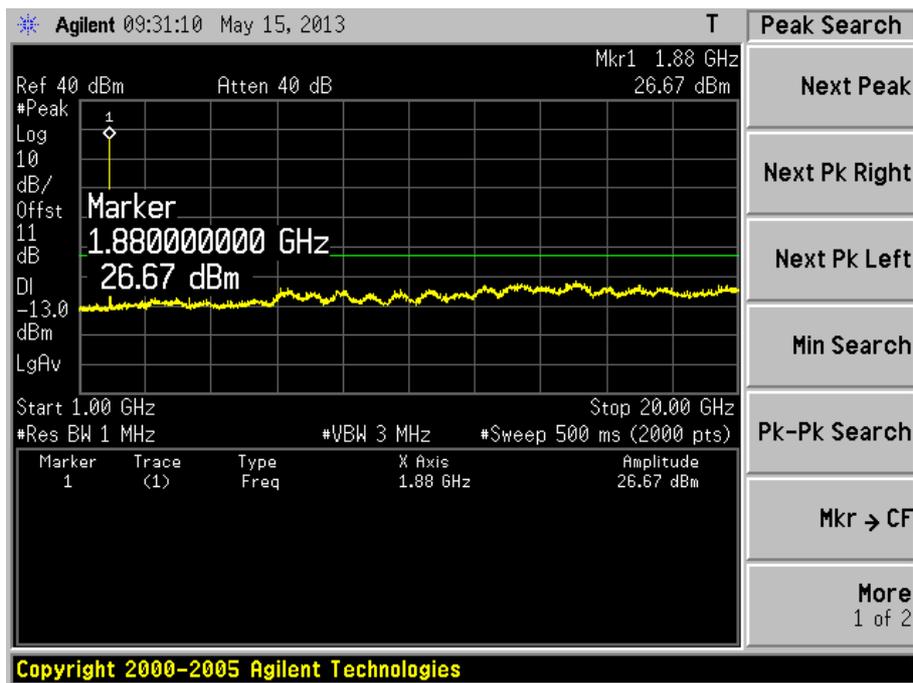
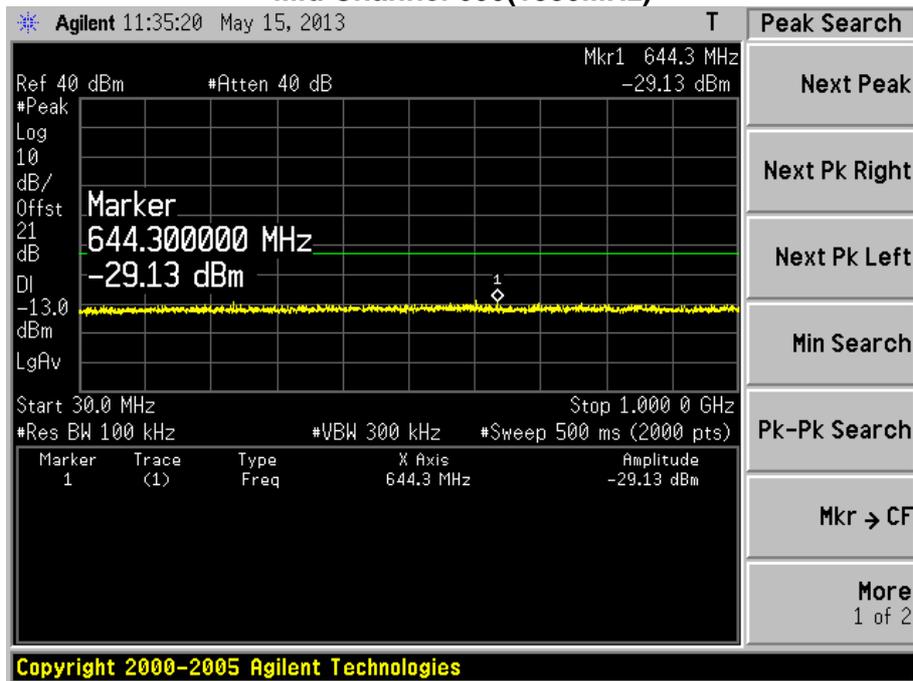


High Channel 1175(1908.75MHz)

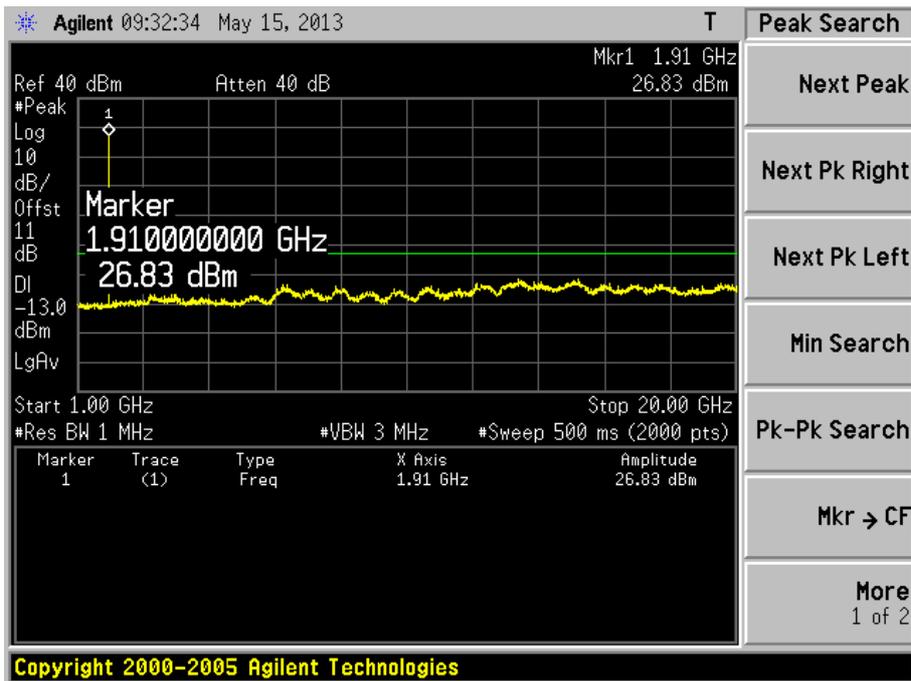
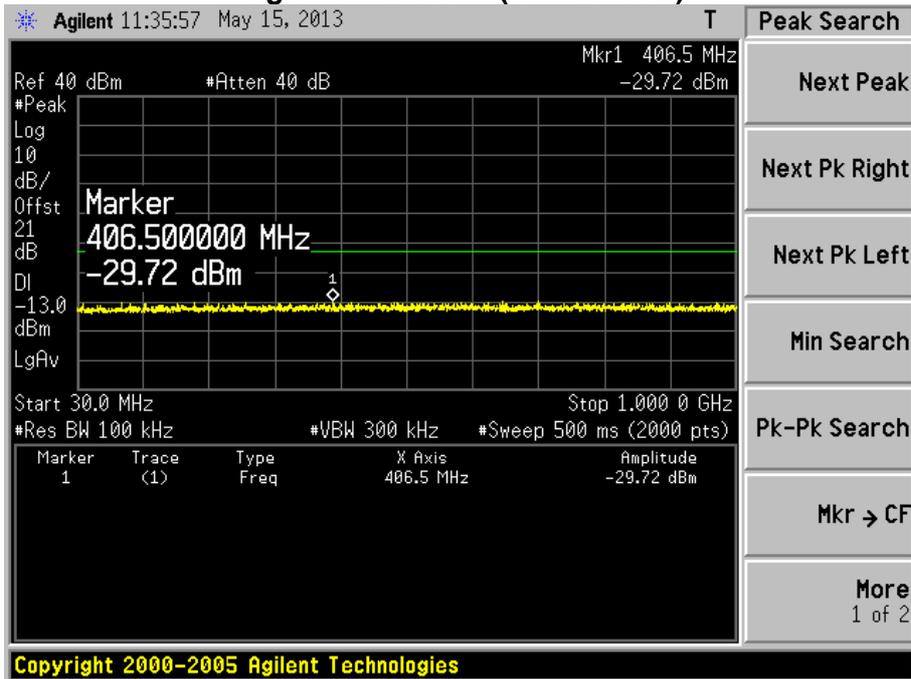


Product	cdma2000 Mobile Phone		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 3: CDMA 2000 1XEVD0 Rel-0 BC0 Link		
Date of Test	2013/05/15	Test Site	TR-8



Low Channel 1013(824.7MHz)

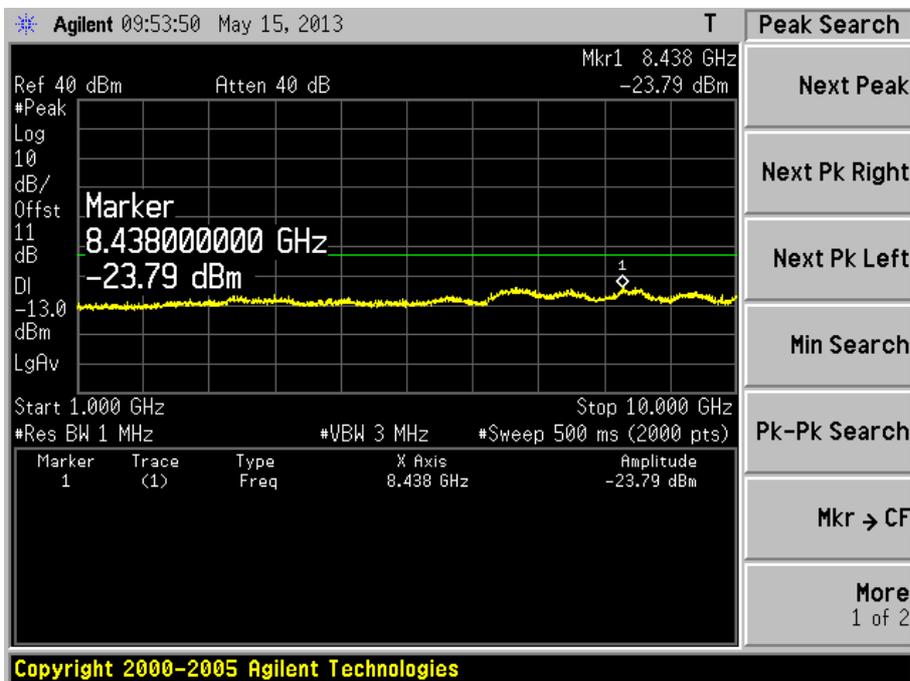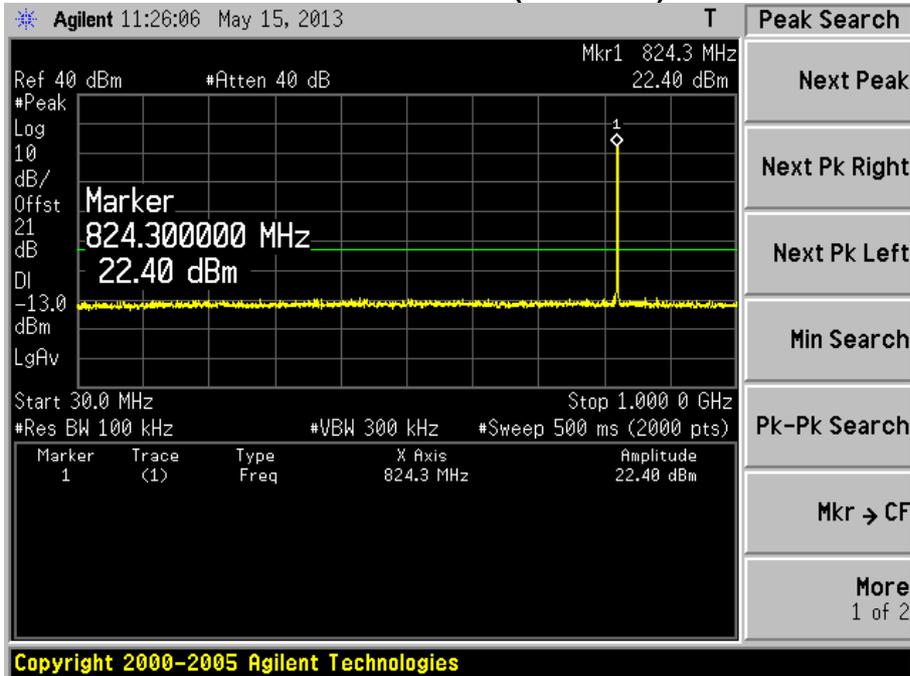

Mid Channel 384(836.52MHz)

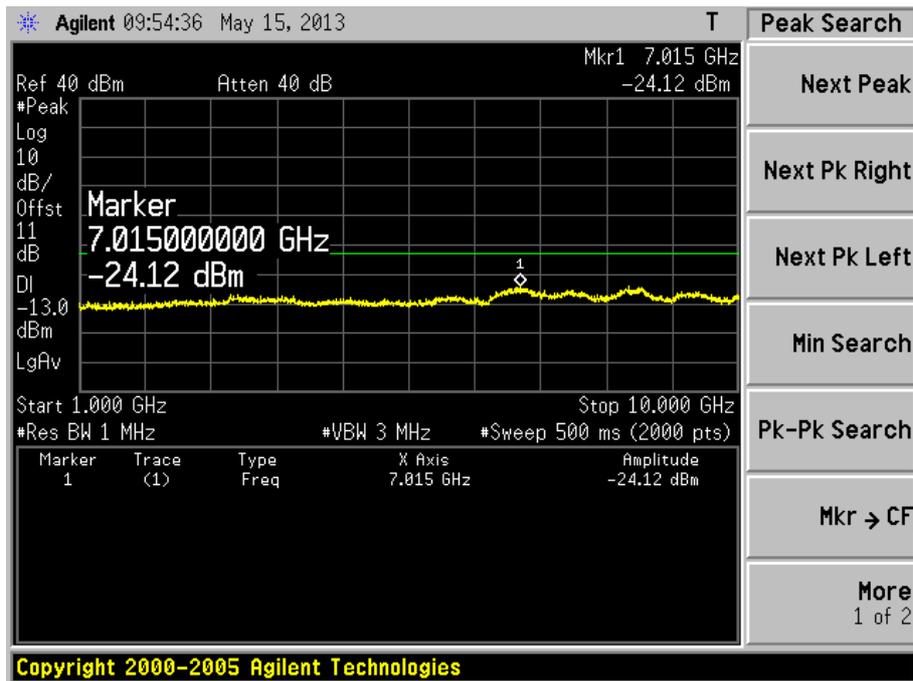
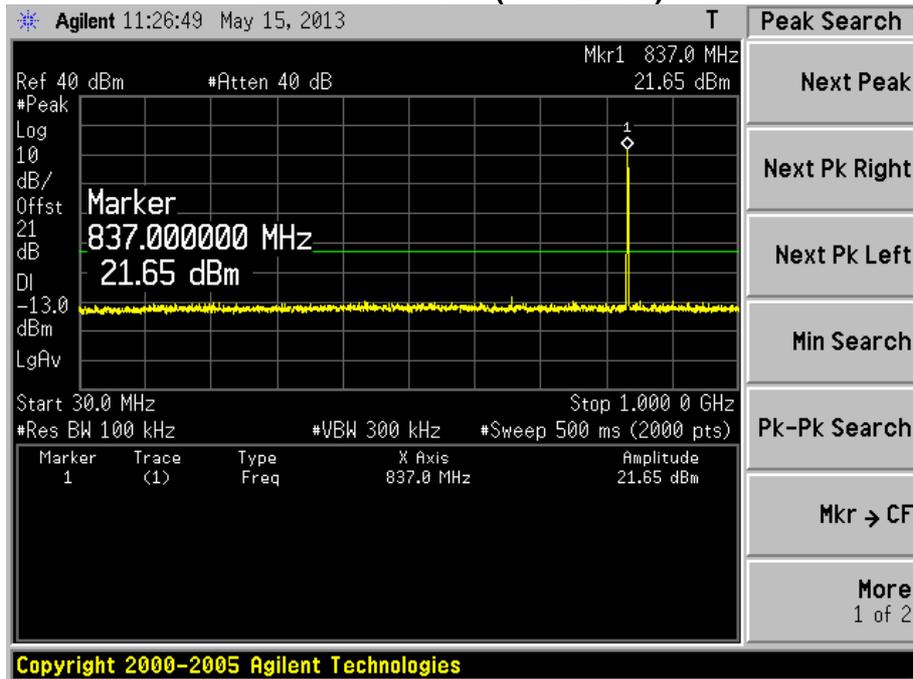


High Channel 777(848.31MHz)

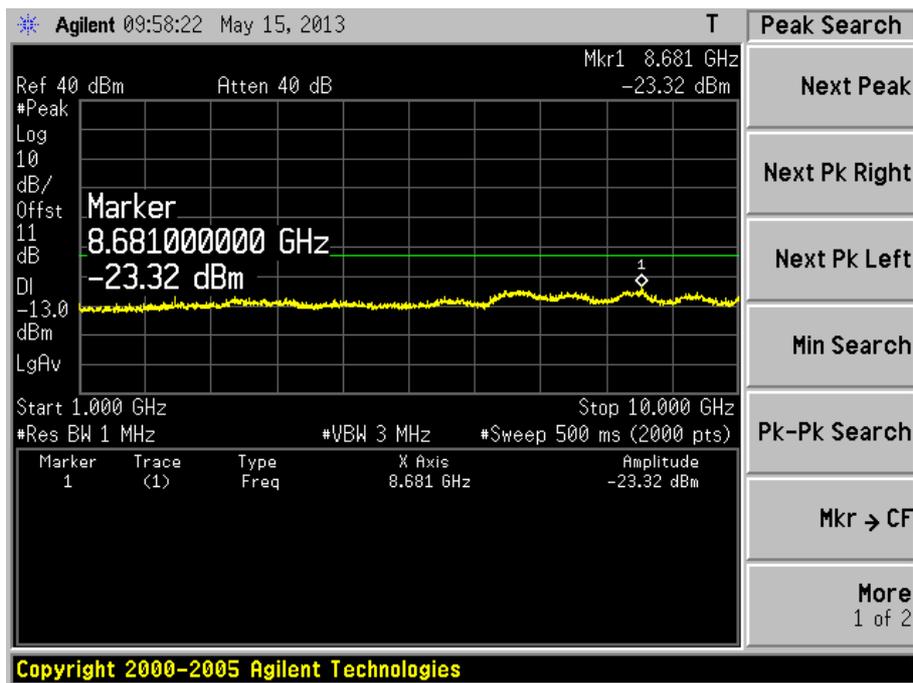
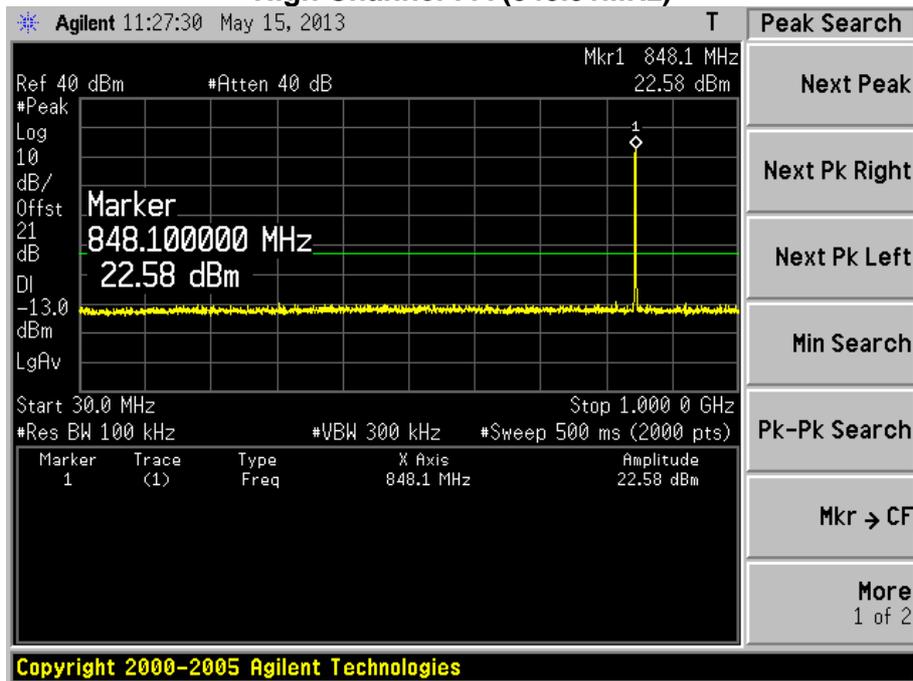




Product	cdma2000 Mobile Phone		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 4: CDMA 2000 1XEVD0 Rel-0 BC1 Link		
Date of Test	2013/05/15	Test Site	TR-8

Low Channel 25(1851.25MHz)

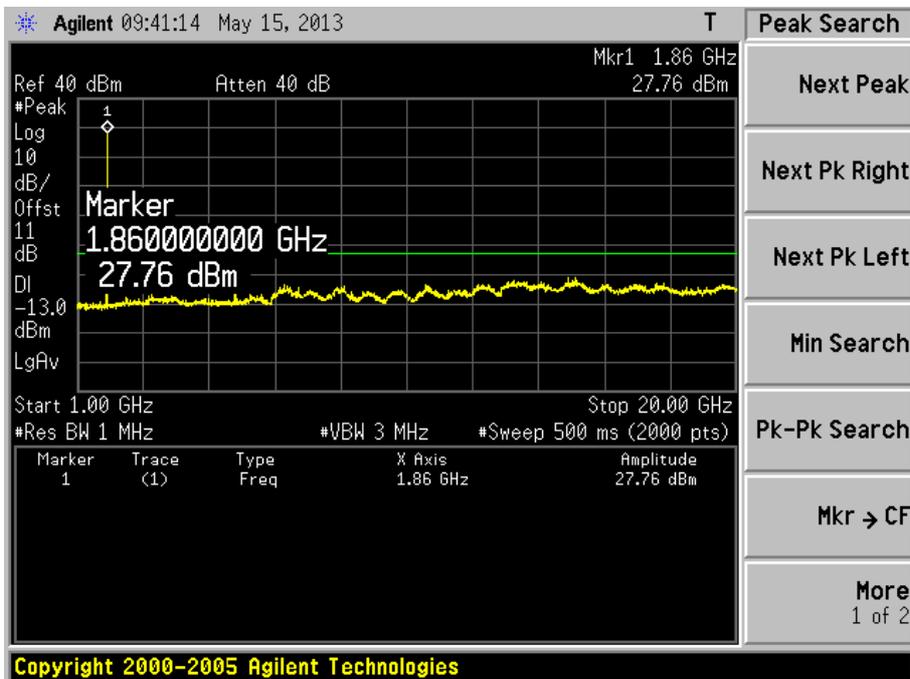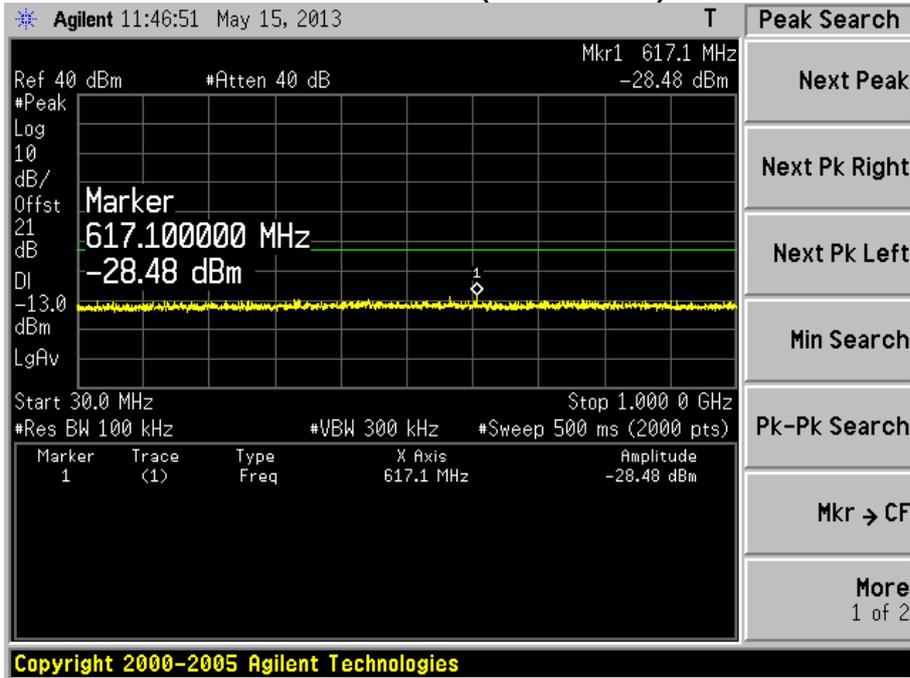



Mid Channel 600(1880MHz)

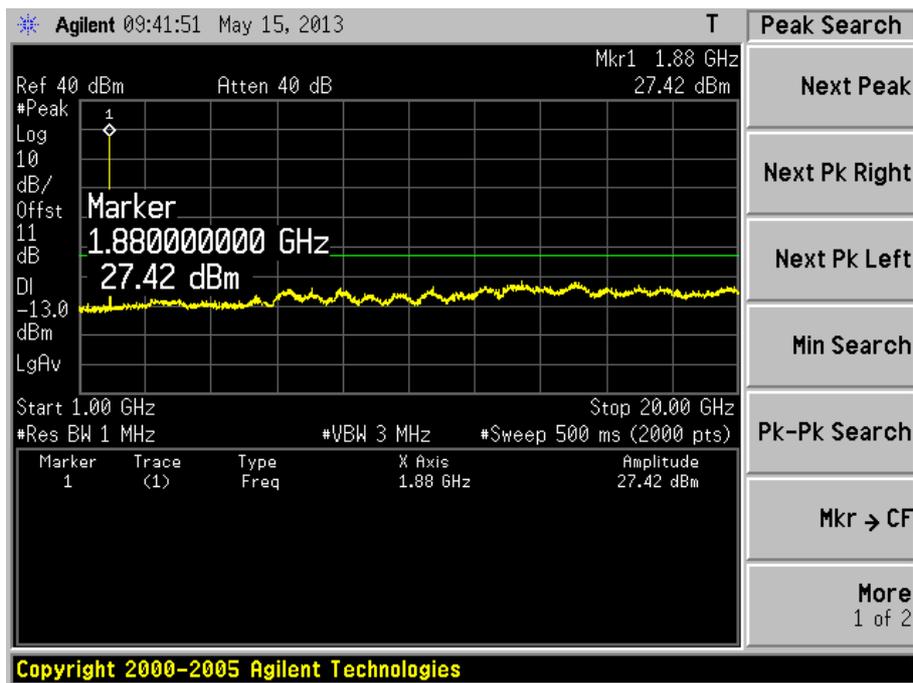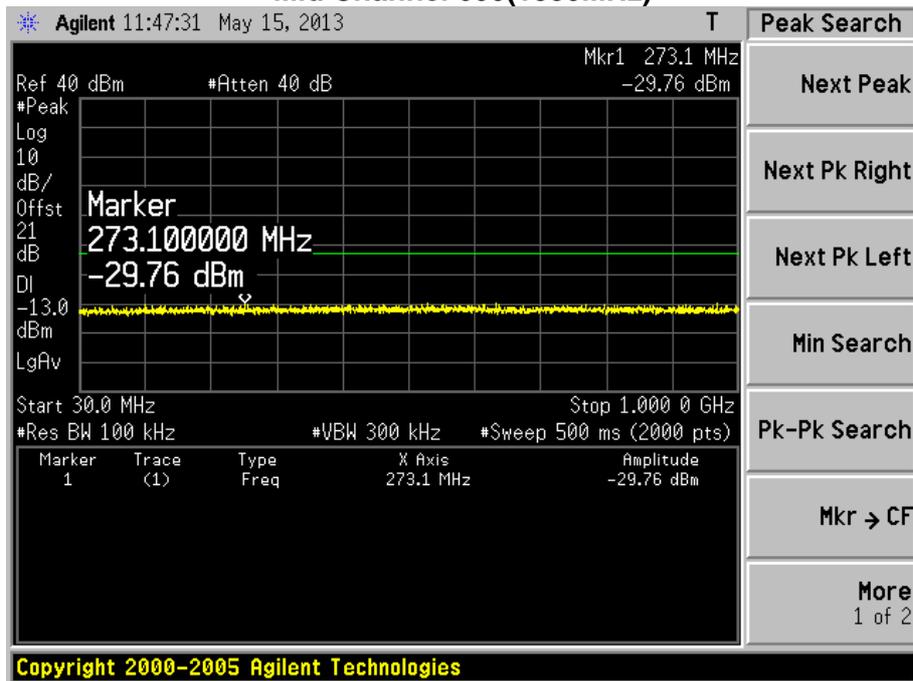

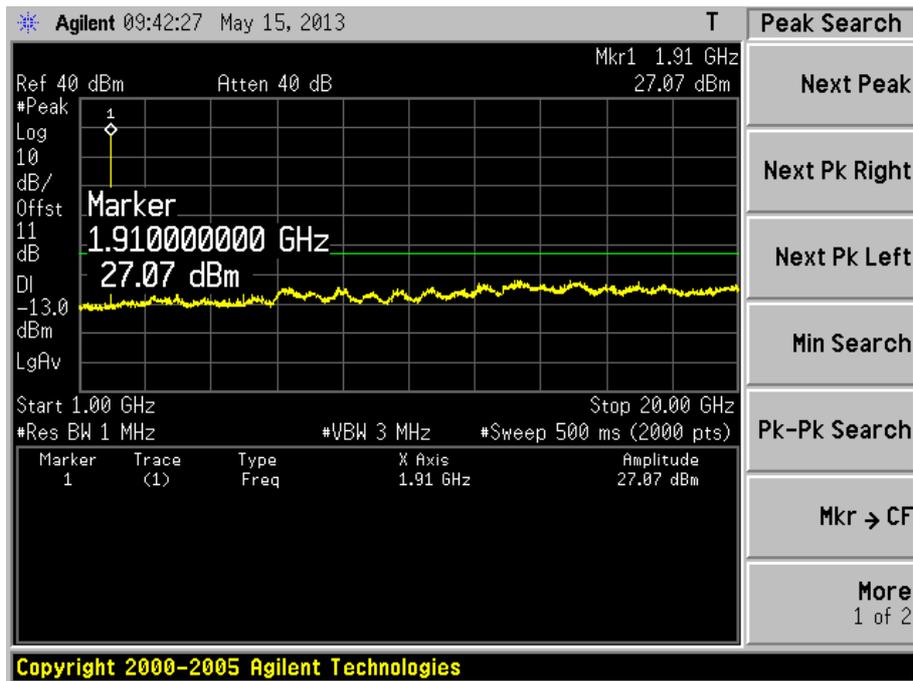
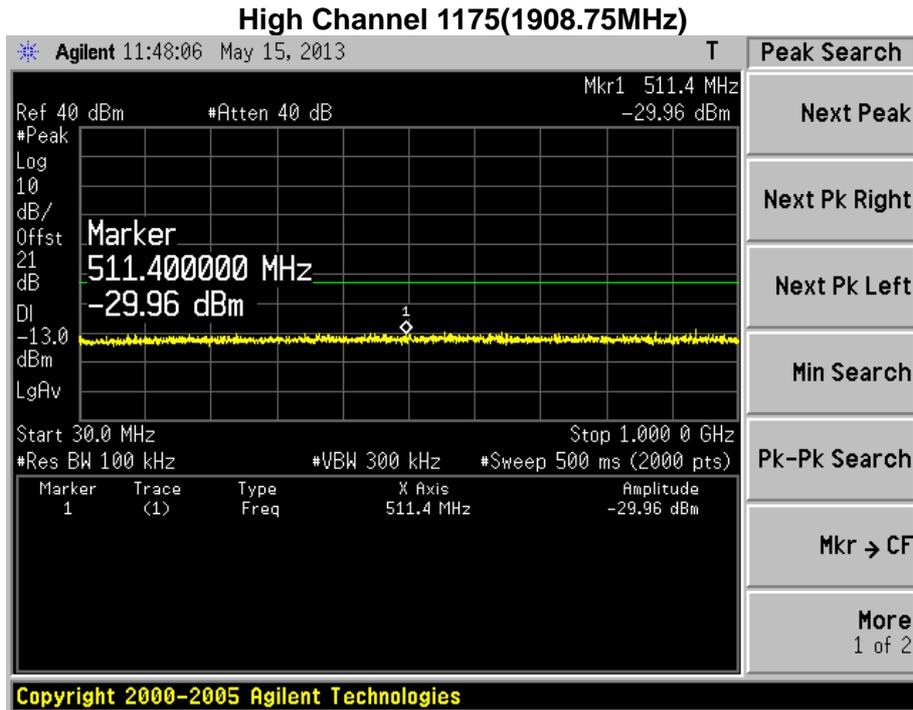


Product	cdma2000 Mobile Phone		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 5: CDMA 2000 1XEVD0 Rel-A BC0 Link		
Date of Test	2013/05/15	Test Site	TR-8



Low Channel 1013(824.7MHz)

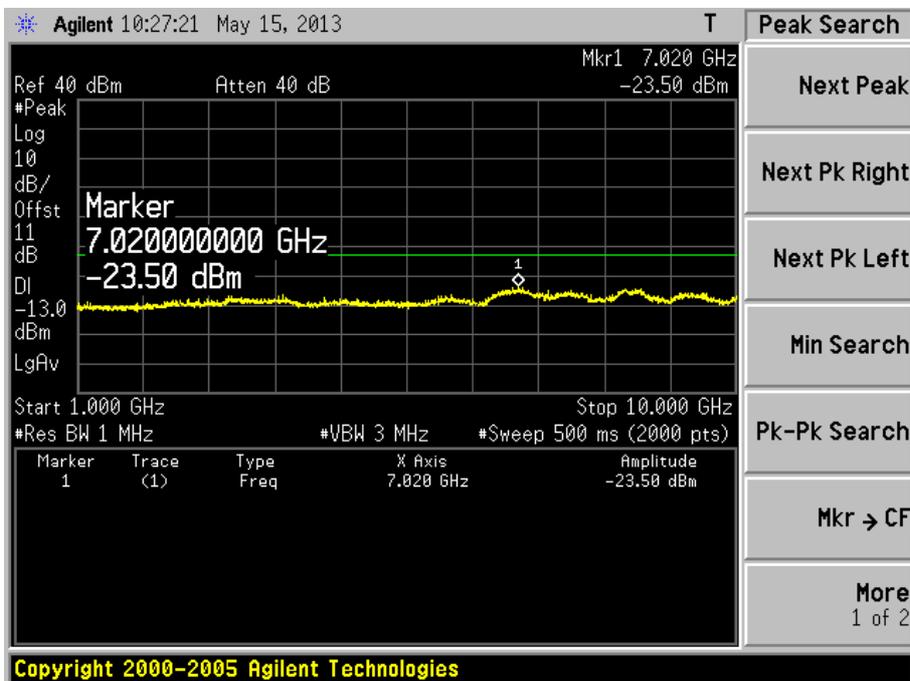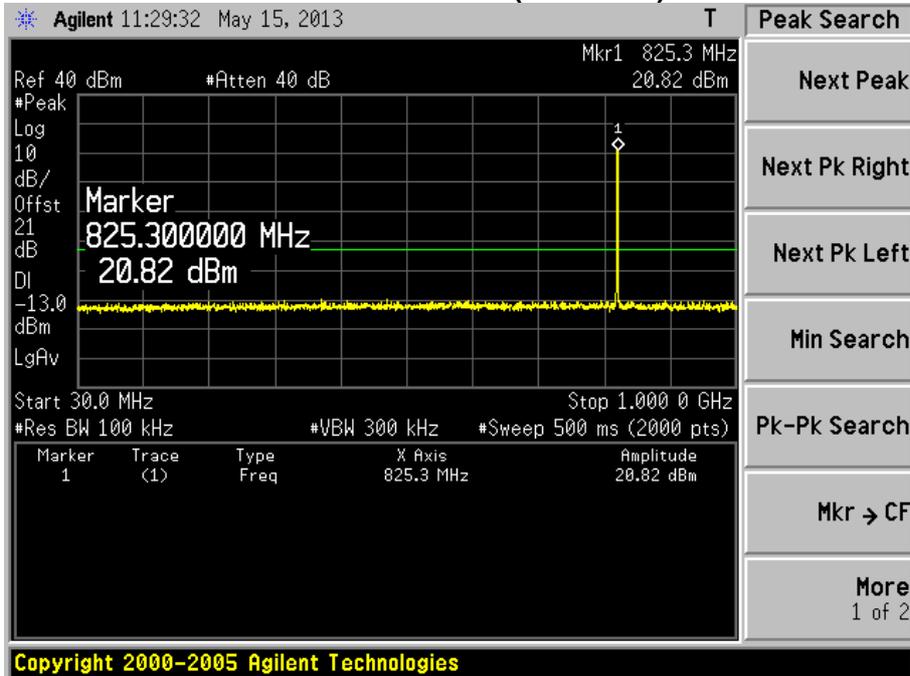

Mid Channel 384(836.52MHz)

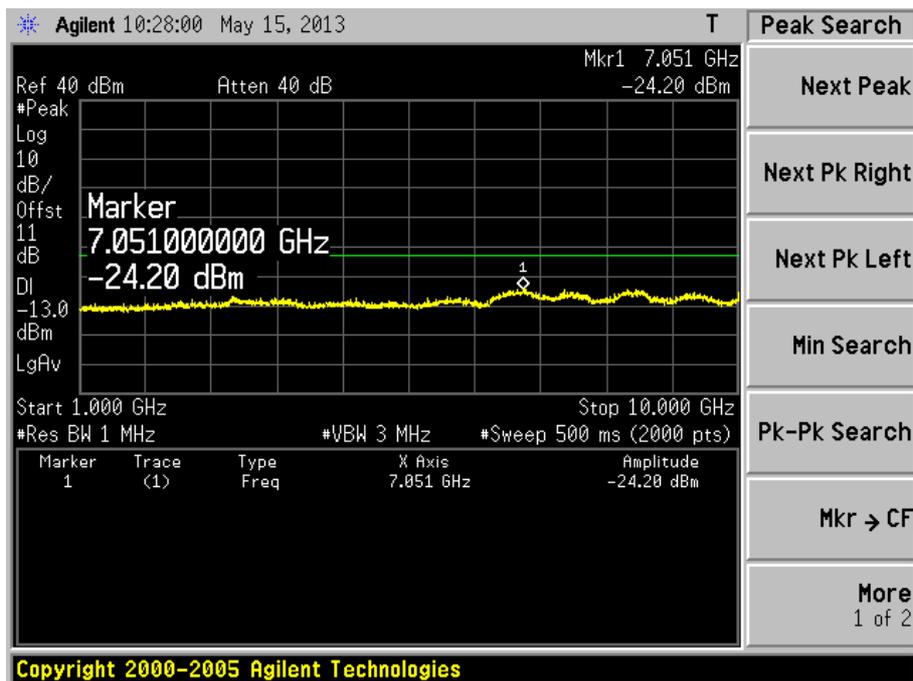
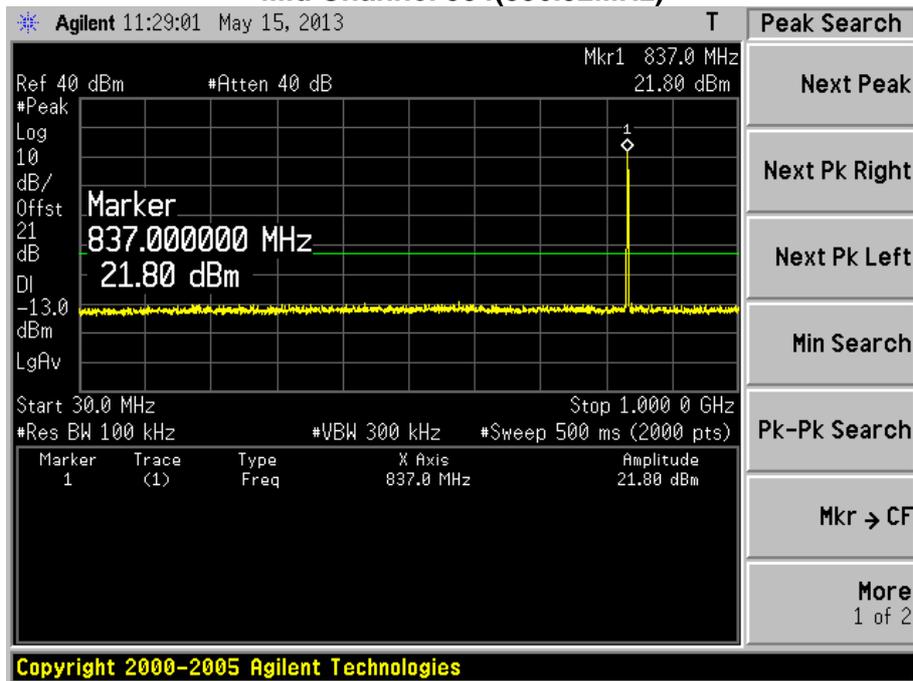




High Channel 777(848.31MHz)

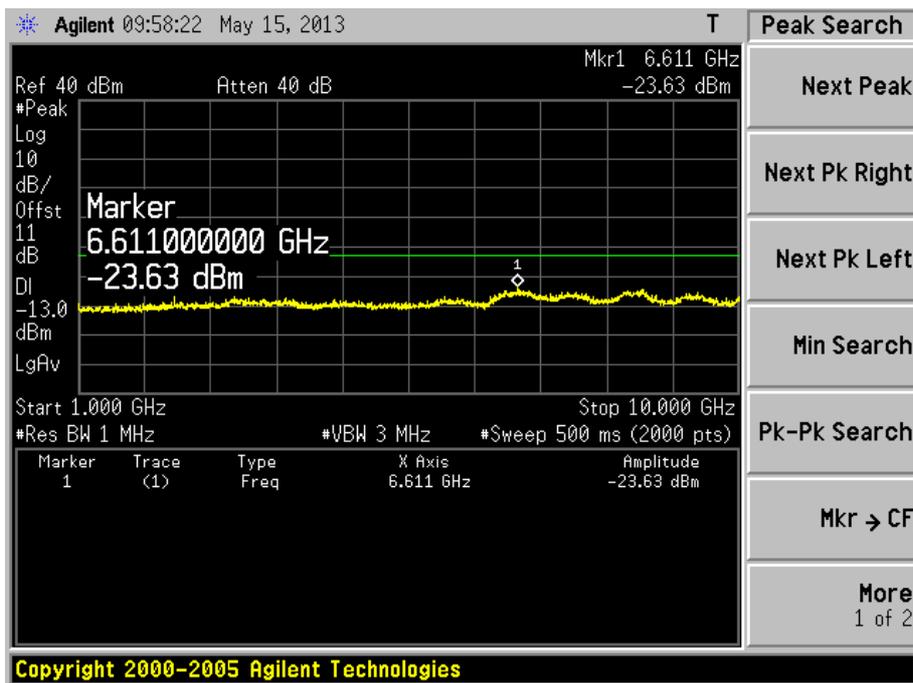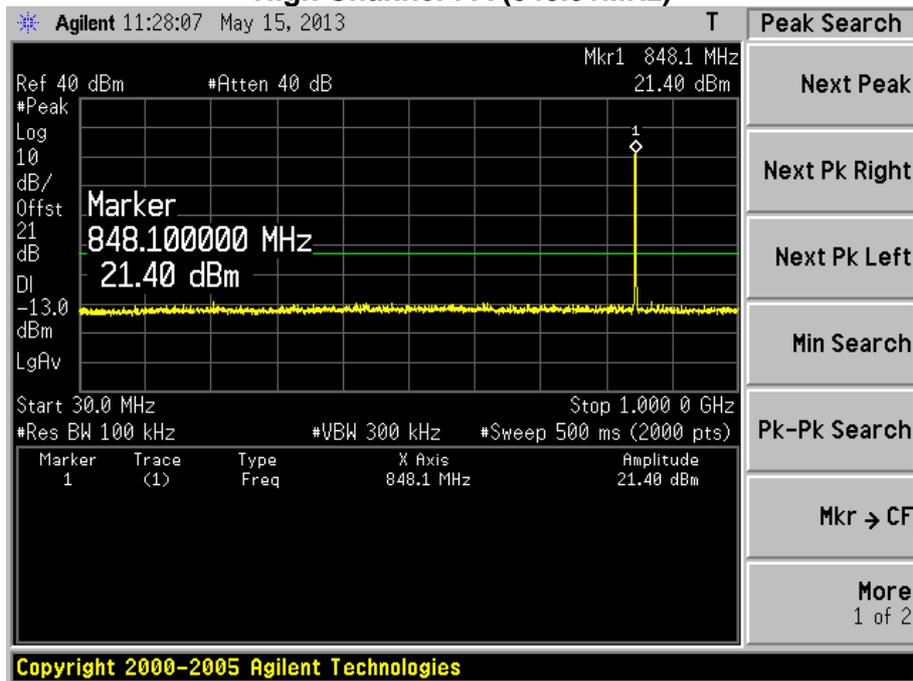



Product	cdma2000 Mobile Phone		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 6: CDMA 2000 1XEVD0 Rel-A BC1 Link		
Date of Test	2013/05/15	Test Site	TR-8

Low Channel 25(1851.25MHz)

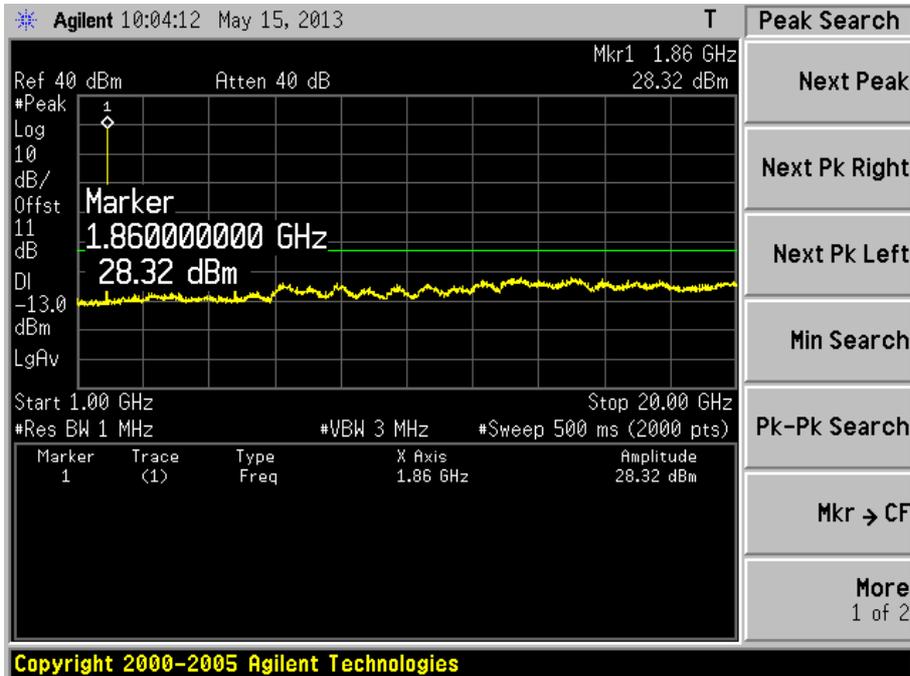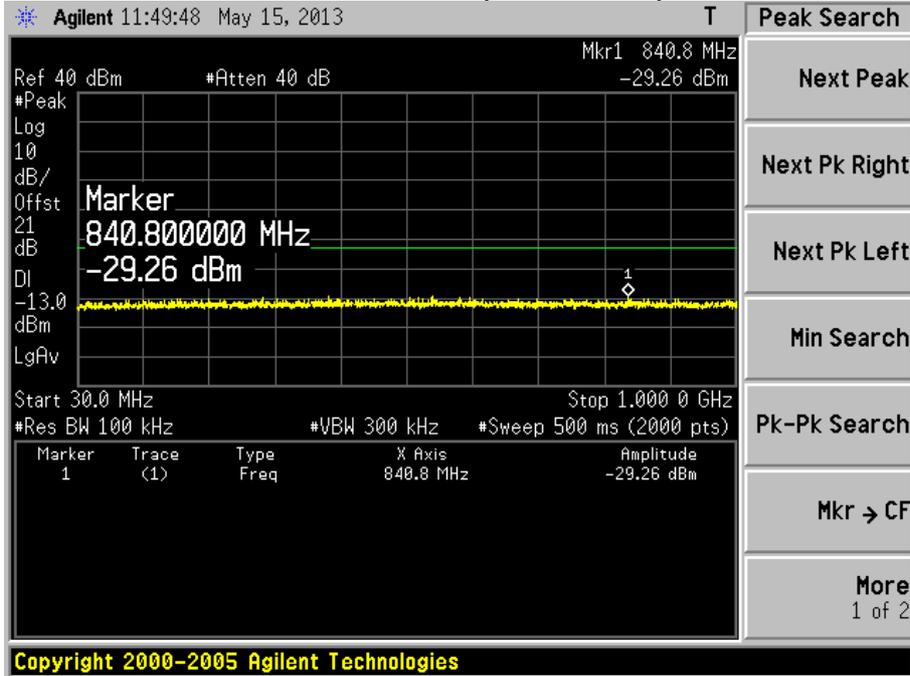

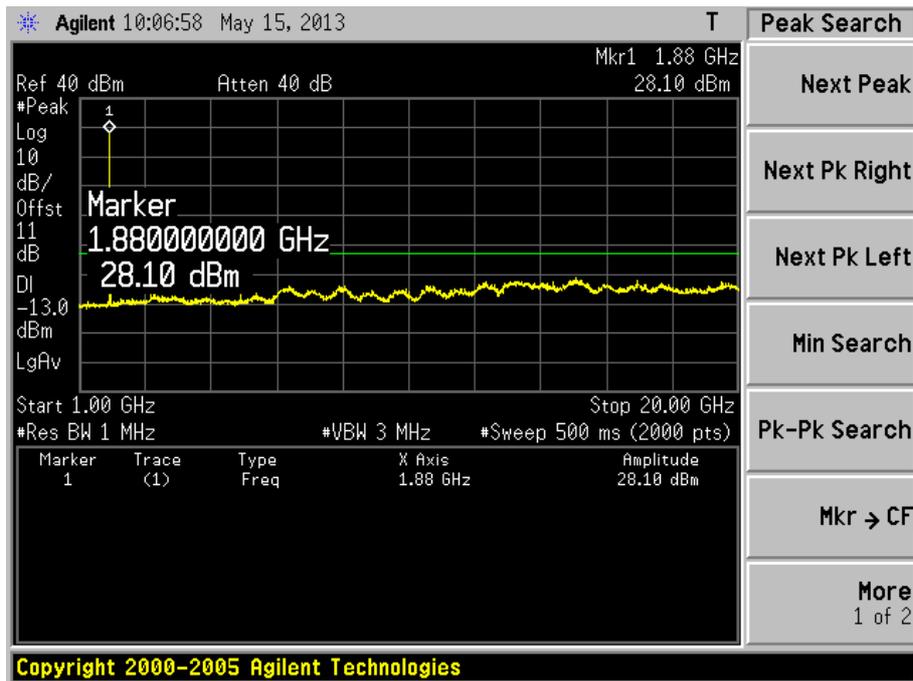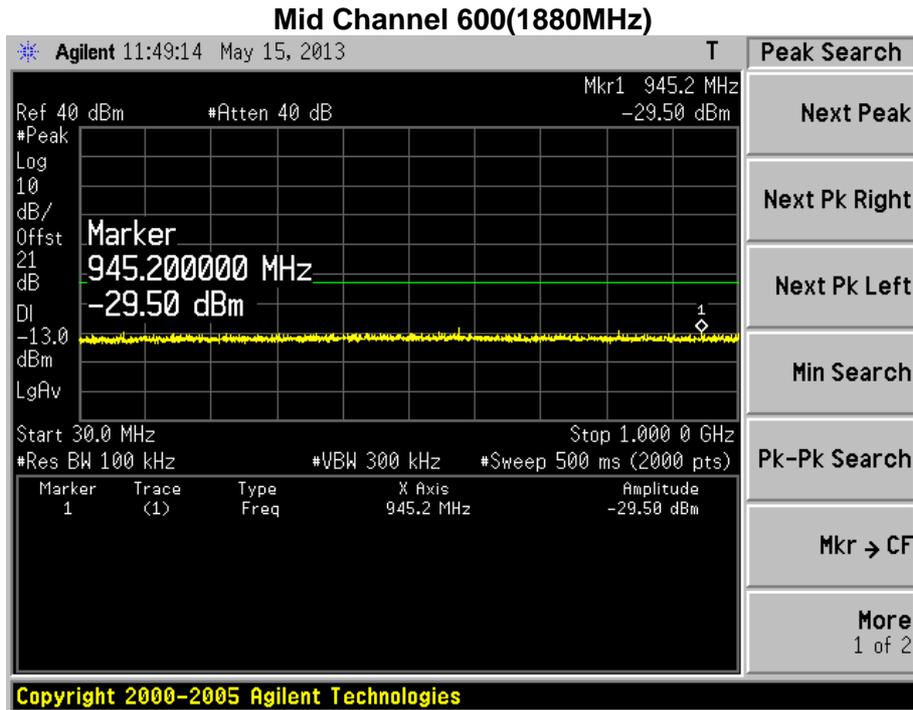

High Channel 1175(1908.75MHz)

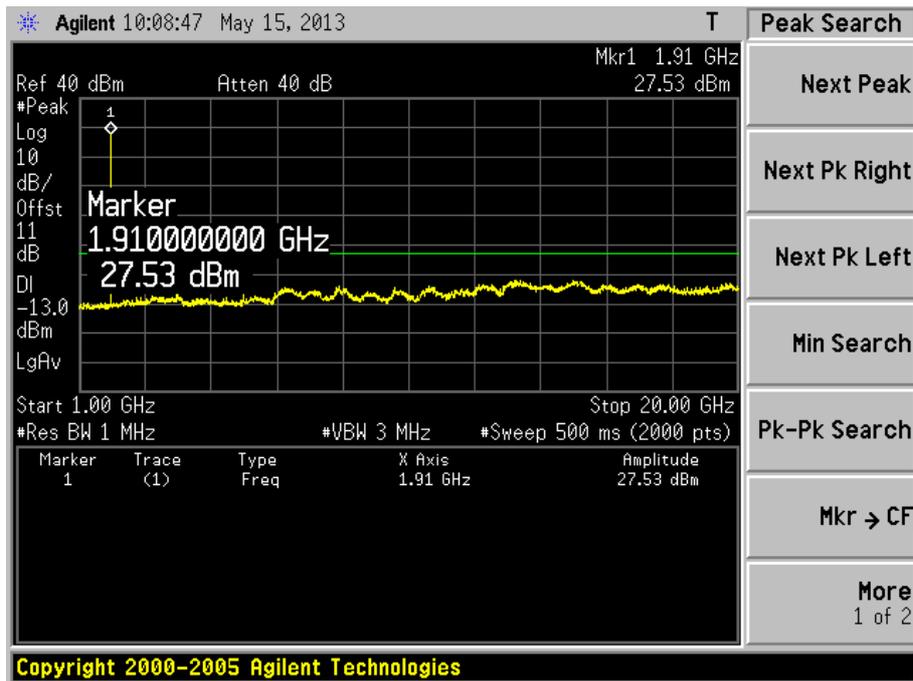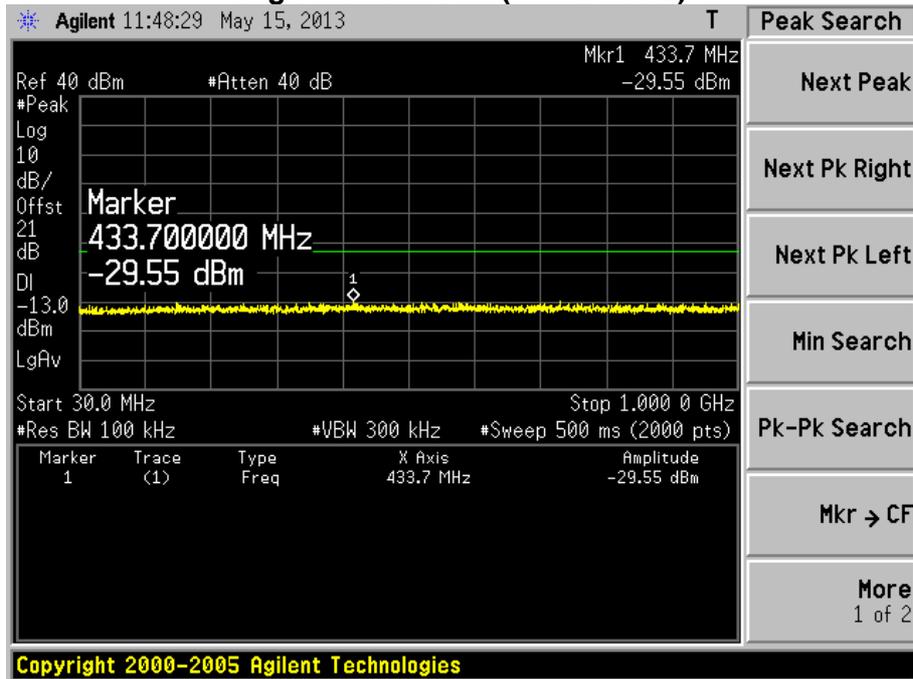

Product	cdma2000 Mobile Phone		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 1: CDMA 2000 1X BC0 Link		
Date of Test	2013/05/15	Test Site	AC-5

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 1013 (824.70MHz)								
1649.40	-63.20	V	-65.78	2.50	9.78	-58.50	-13.00	-45.50
2474.10	-63.60	V	-62.71	3.12	10.49	-55.34	-13.00	-42.34
1649.40	-59.05	H	-61.74	2.50	9.78	-54.46	-13.00	-41.46
2474.10	-63.84	H	-62.78	3.12	10.49	-55.41	-13.00	-42.41
Middle Channel 384 (836.52MHz)								
1672.64	-60.98	V	-63.64	2.51	9.94	-56.21	-13.00	-43.21
2508.96	-59.87	V	-59.17	3.18	10.61	-51.74	-13.00	-38.74
1672.64	-60.93	H	-63.32	2.51	9.94	-55.89	-13.00	-42.89
2508.96	-63.09	H	-62.07	3.18	10.61	-54.64	-13.00	-41.64
High Channel 777 (848.31MHz)								
1696.62	-60.56	V	-63.35	2.53	10.10	-55.78	-13.00	-42.78
2544.93	-63.76	V	-62.23	3.15	10.67	-54.71	-13.00	-41.71
1696.62	-59.53	H	-61.58	2.53	10.10	-54.01	-13.00	-41.01
2544.93	-64.34	H	-62.55	3.15	10.67	-55.03	-13.00	-42.03

Product	cdma2000 Mobile Phone		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 2: CDMA 2000 1X BC1 Link		
Date of Test	2013/05/15	Test Site	AC-5

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 25 (1851.25MHz)								
3702.50	-48.68	V	-45.23	3.83	12.69	-36.37	-13.00	-23.37
5553.75	-60.64	V	-52.12	4.82	13.14	-43.80	-13.00	-30.80
3702.50	-53.10	H	-49.74	3.83	12.69	-40.88	-13.00	-27.88
5553.75	-59.60	H	-51.71	4.82	13.14	-43.39	-13.00	-30.39
Middle Channel 600 (1880MHz)								
3760.00	-53.16	V	-49.94	3.73	12.72	-40.95	-13.00	-27.95
5640.00	-57.48	V	-49.55	4.92	13.13	-41.34	-13.00	-28.34
3760.00	-54.26	H	-50.96	3.73	12.72	-41.97	-13.00	-28.97
5640.00	-63.20	H	-55.59	4.92	13.13	-47.38	-13.00	-34.38
High Channel 1175 (1908.75MHz)								
3817.50	-45.76	V	-42.08	3.98	12.73	-33.33	-13.00	-20.33
5726.25	-56.37	V	-47.76	4.86	13.11	-39.51	-13.00	-26.51
3817.50	-49.39	H	-45.53	3.98	12.73	-36.78	-13.00	-23.78
5726.25	-58.94	H	-50.71	4.86	13.11	-42.46	-13.00	-29.46

Product	cdma2000 Mobile Phone		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 3: CDMA 2000 1XEVD0 Rel-0 BC0 Link		
Date of Test	2013/05/15	Test Site	AC-5

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 1013 (824.70MHz)								
1649.40	-62.53	V	-65.11	2.50	9.78	-57.83	-13.00	-44.83
2474.10	-63.99	V	-63.10	3.12	10.49	-55.73	-13.00	-42.73
1649.40	-58.52	H	-61.21	2.50	9.78	-53.93	-13.00	-40.93
2474.10	-63.90	H	-62.83	3.12	10.49	-55.46	-13.00	-42.46
Middle Channel 384 (836.52MHz)								
1672.64	-59.03	V	-61.70	2.51	9.94	-54.27	-13.00	-41.27
2508.96	-60.57	V	-59.87	3.18	10.61	-52.44	-13.00	-39.44
1672.64	-58.90	H	-61.32	2.51	9.94	-53.89	-13.00	-40.89
2508.96	-62.75	H	-61.73	3.18	10.61	-54.30	-13.00	-41.30
High Channel 777 (848.31MHz)								
1696.62	-60.93	V	-63.71	2.53	10.10	-56.14	-13.00	-43.14
2544.93	-62.62	V	-61.09	3.15	10.67	-53.57	-13.00	-40.57
1696.62	-58.35	H	-60.40	2.53	10.10	-52.83	-13.00	-39.83
2544.93	-63.57	H	-61.78	3.15	10.67	-54.26	-13.00	-41.26

Product	cdma2000 Mobile Phone		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 4: CDMA 2000 1XEVD0 Rel-0 BC1 Link		
Date of Test	2013/05/15	Test Site	AC-5

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 25 (1851.25MHz)								
3702.50	-48.68	V	-42.04	3.83	12.69	-33.18	-13.00	-20.18
5553.75	-60.64	V	-48.44	4.82	13.14	-40.12	-13.00	-27.12
3702.50	-53.10	H	-47.12	3.83	12.69	-38.26	-13.00	-25.26
5553.75	-59.60	H	-50.91	4.82	13.14	-42.59	-13.00	-29.59
Middle Channel 600 (1880MHz)								
3760.00	-51.64	V	-48.42	3.73	12.72	-39.43	-13.00	-26.43
5640.00	-57.10	V	-49.17	4.92	13.13	-40.96	-13.00	-27.96
3760.00	-53.27	H	-49.97	3.73	12.72	-40.98	-13.00	-27.98
5640.00	-57.37	H	-49.76	4.92	13.13	-41.55	-13.00	-28.55
High Channel 1175 (1908.75MHz)								
3817.50	-39.77	V	-36.09	3.98	12.73	-27.34	-13.00	-14.34
5726.25	-52.50	V	-43.90	4.86	13.11	-35.65	-13.00	-22.65
3817.50	-43.43	H	-39.57	3.98	12.73	-30.82	-13.00	-17.82
5726.25	-54.36	H	-46.13	4.86	13.11	-37.88	-13.00	-24.88

Product	cdma2000 Mobile Phone		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 5: CDMA 2000 1XEVD0 Rel-A BC0 Link		
Date of Test	2013/05/15	Test Site	AC-5

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 1013 (824.70MHz)								
1649.40	-60.05	V	-62.65	2.50	9.78	-55.37	-13.00	-42.37
2474.10	-64.10	V	-63.22	3.12	10.49	-55.85	-13.00	-42.85
1649.40	-58.59	H	-61.16	2.50	9.78	-53.88	-13.00	-40.88
2474.10	-64.00	H	-62.94	3.12	10.49	-55.57	-13.00	-42.57
Middle Channel 384 (836.52MHz)								
1672.64	-60.57	V	-63.24	2.51	9.94	-55.81	-13.00	-42.81
2508.96	-61.93	V	-61.30	3.18	10.61	-53.87	-13.00	-40.87
1672.64	-57.64	H	-60.06	2.51	9.94	-52.63	-13.00	-39.63
2508.96	-63.19	H	-62.16	3.18	10.61	-54.73	-13.00	-41.73
High Channel 777 (848.31MHz)								
1696.62	-61.84	V	-64.63	2.53	10.10	-57.06	-13.00	-44.06
2544.93	-63.66	V	-62.13	3.15	10.67	-54.61	-13.00	-41.61
1696.62	-59.51	H	-61.57	2.53	10.10	-54.00	-13.00	-41.00
2544.93	-63.07	H	-61.28	3.15	10.67	-53.76	-13.00	-40.76

Product	cdma2000 Mobile Phone		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 6: CDMA 2000 1XEVD0 Rel-A BC1 Link		
Date of Test	2013/05/15	Test Site	AC-5

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 25 (1851.25MHz)								
3702.50	-43.92	V	-40.47	3.83	12.69	-31.61	-13.00	-18.61
5553.75	-52.65	V	-44.13	4.82	13.14	-35.81	-13.00	-22.81
3702.50	-46.03	H	-42.67	3.83	12.69	-33.81	-13.00	-20.81
5553.75	-52.35	H	-44.46	4.82	13.14	-36.14	-13.00	-23.14
Middle Channel 600 (1880MHz)								
3760.00	-49.54	V	-46.32	3.73	12.72	-37.33	-13.00	-24.33
5640.00	-52.86	V	-44.93	4.92	13.13	-36.72	-13.00	-23.72
3760.00	-52.11	H	-48.81	3.73	12.72	-39.82	-13.00	-26.82
5640.00	-55.05	H	-47.44	4.92	13.13	-39.23	-13.00	-26.23
High Channel 1175 (1908.75MHz)								
3817.50	-38.01	V	-34.33	3.98	12.73	-25.58	-13.00	-12.58
5726.25	-48.68	V	-40.08	4.86	13.11	-31.83	-13.00	-18.83
3817.50	-41.90	H	-38.07	3.98	12.73	-29.32	-13.00	-16.32
5726.25	-50.80	H	-42.57	4.86	13.11	-34.32	-13.00	-21.32


8. Frequency Stability Under Temperature & Voltage Variations

8.1. Test Equipment

Frequency Stability Under Temperature & Voltage Variations / TR-7

Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2014.03.30
Radio Communication Tester	R&S	CMU 200	117088	2014.03.30
Dual Directional Coupler	Agilent	778D	20160	2014.03.30
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2014.03.30
DC Power Supply	IDRC	CD-035-020PR	977272	2014.03.30
Temperature & Humidity Chamber	Gaoyu	TH-1P-B	WIT-05121302	2014.01.10
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC6-TH	2014.01.11

8.2. Test Setup

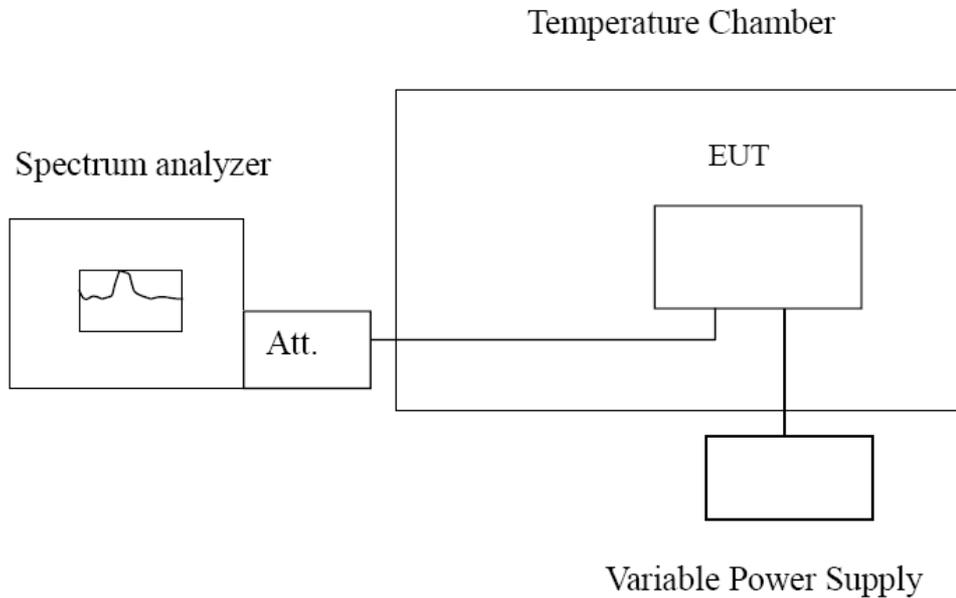

8.3. Limit

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Limit	$< \pm 2.5 \text{ ppm}$
-------	-------------------------

8.4. Test Procedure

Frequency Stability Under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

8.5. Uncertainty

The measurement uncertainty is defined as $\pm 10 \text{ Hz}$.

8.6. Test Result

Product	cdma2000 Mobile Phone		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 1: CDMA 2000 1X BC0 Link		
Date of Test	2013/05/17	Test Site	TR-7

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	836.52	44	± 2091.3
-20	836.52	36	± 2091.3
-10	836.52	24	± 2091.3
0	836.52	-33	± 2091.3
10	836.52	-25	± 2091.3
20	836.52	16	± 2091.3
30	836.52	17	± 2091.3
40	836.52	55	± 2091.3
50	836.52	-64	± 2091.3

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.200	836.52	21	± 2091.3
3.700	836.52	23	± 2091.3
3.500	836.52	-36	± 2091.3

Product	cdma2000 Mobile Phone		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 2: CDMA 2000 1X BC1 Link		
Date of Test	2013/05/17	Test Site	TR-7

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	1880	44	± 4700
-20	1880	31	± 4700
-10	1880	-29	± 4700
0	1880	30	± 4700
10	1880	-16	± 4700
20	1880	26	± 4700
30	1880	-36	± 4700
40	1880	-41	± 4700
50	1880	-58	± 4700

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.200	1880	16	± 4700
3.700	1880	26	± 4700
3.500	1880	44	± 4700

Product	cdma2000 Mobile Phone		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 3: CDMA 2000 1XEVD0 Rel-0 BC0 Link		
Date of Test	2013/05/17	Test Site	TR-7

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	836.52	39	± 2091.3
-20	836.52	-12	± 2091.3
-10	836.52	31	± 2091.3
0	836.52	28	± 2091.3
10	836.52	26	± 2091.3
20	836.52	57	± 2091.3
30	836.52	-62	± 2091.3
40	836.52	39	± 2091.3
50	836.52	-44	± 2091.3

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.200	836.52	-23	± 2091.3
3.700	836.52	16	± 2091.3
3.500	836.52	39	± 2091.3

Product	cdma2000 Mobile Phone		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 4: CDMA 2000 1XEVD0 Rel-0 BC1 Link		
Date of Test	2013/05/17	Test Site	TR-7

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	1880	14	± 4700
-20	1880	27	± 4700
-10	1880	19	± 4700
0	1880	46	± 4700
10	1880	-35	± 4700
20	1880	-22	± 4700
30	1880	-61	± 4700
40	1880	-39	± 4700
50	1880	22	± 4700

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.200	1880	33	± 4700
3.700	1880	19	± 4700
3.500	1880	15	± 4700

Product	cdma2000 Mobile Phone		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 5: CDMA 2000 1XEVD0 Rel-A BC0 Link		
Date of Test	2013/05/17	Test Site	TR-7

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	836.52	-39	± 2091.3
-20	836.52	26	± 2091.3
-10	836.52	11	± 2091.3
0	836.52	-55	± 2091.3
10	836.52	28	± 2091.3
20	836.52	-30	± 2091.3
30	836.52	-22	± 2091.3
40	836.52	-16	± 2091.3
50	836.52	-72	± 2091.3

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.200	836.52	63	± 2091.3
3.700	836.52	-58	± 2091.3
3.500	836.52	-46	± 2091.3

Product	cdma2000 Mobile Phone		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 6: CDMA 2000 1XEVD0 Rel-A BC1 Link		
Date of Test	2013/05/17	Test Site	TR-7

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	1880	39	± 4700
-20	1880	-24	± 4700
-10	1880	35	± 4700
0	1880	28	± 4700
10	1880	41	± 4700
20	1880	-46	± 4700
30	1880	32	± 4700
40	1880	-29	± 4700
50	1880	-24	± 4700

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.200	1880	-31	± 4700
3.700	1880	-28	± 4700
3.500	1880	-49	± 4700

_____ The End _____