



**Appendix A. System Check Plots**

<b>Table of contents</b>
SystemPerformanceCheck-D835-EX-Head
SystemPerformanceCheck-D835-EX- Body
SystemPerformanceCheck-D1800-EX-Head
SystemPerformanceCheck-D1800-EX-Body
SystemPerformanceCheck-D1900-EX-Head
SystemPerformanceCheck-D1900-EX-Body
SystemPerformanceCheck-D2450-EX-Head
SystemPerformanceCheck-D2450-EX-Body

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D835-EX-Head

**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d126**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.916$  mho/m;  $\epsilon_r = 41.458$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.01, 9.01, 9.01); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn913; Calibrated: 2011-12-23
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

**Configuration/d=15mm,pin=250mW/Area Scan (6x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 2.41 W/kg


**Configuration/d=15mm,pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 52.516 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.48 W/kg

**SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.57 W/kg**

Maximum value of SAR (measured) = 2.55 W/kg

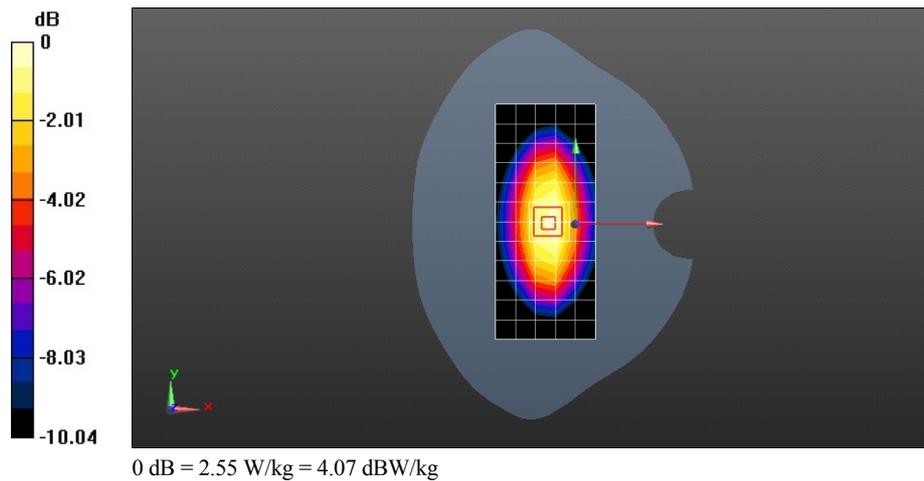

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D835-EX-Body

**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d126**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.967$  mho/m;  $\epsilon_r = 54.562$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn913; Calibrated: 2011-12-23
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

**Configuration/d=15mm,pin=250mW/Area Scan (6x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 2.69 W/kg


**Configuration/d=15mm,pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 39.472 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 3.87 W/kg

**SAR(1 g) = 2.57 W/kg; SAR(10 g) = 1.68 W/kg**

Maximum value of SAR (measured) = 2.77 W/kg

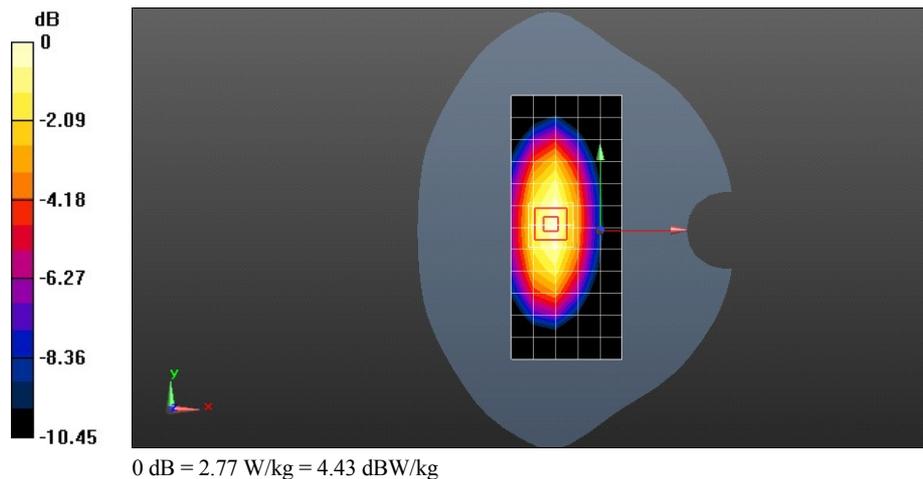

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D1800-EX-Head

**DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: D1800V2 - SN:2d184**

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.431$  mho/m;  $\epsilon_r = 39.816$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.94, 7.94, 7.94); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn913; Calibrated: 2011-12-23
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

**Configuration/d=10mm, Pin=250mW/Area Scan (7x13x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 10.7 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 70.113 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 19.3 W/kg

**SAR(1 g) = 9.87 W/kg; SAR(10 g) = 5.01 W/kg**

Maximum value of SAR (measured) = 11.1 W/kg

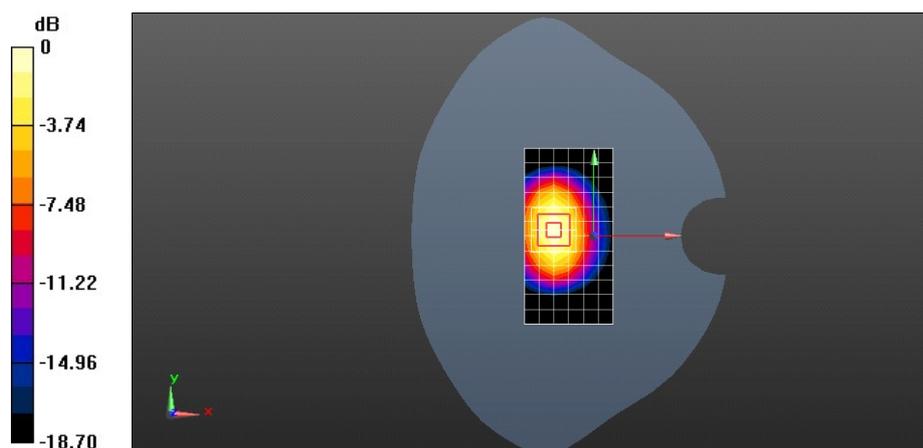

0 dB = 11.1 W/kg = 10.44 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D1800-EX-Body

**DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: D1800V2 - SN:2d184**

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.536$  mho/m;  $\epsilon_r = 53.233$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.43, 7.43, 7.43); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn913; Calibrated: 2011-12-23
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

**Configuration/d=10mm, Pin=250mW/Area Scan (7x10x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 8.68 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 77.898 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 18.2 W/kg

**SAR(1 g) = 9.82 W/kg; SAR(10 g) = 5.06 W/kg**

Maximum value of SAR (measured) = 11.1 W/kg

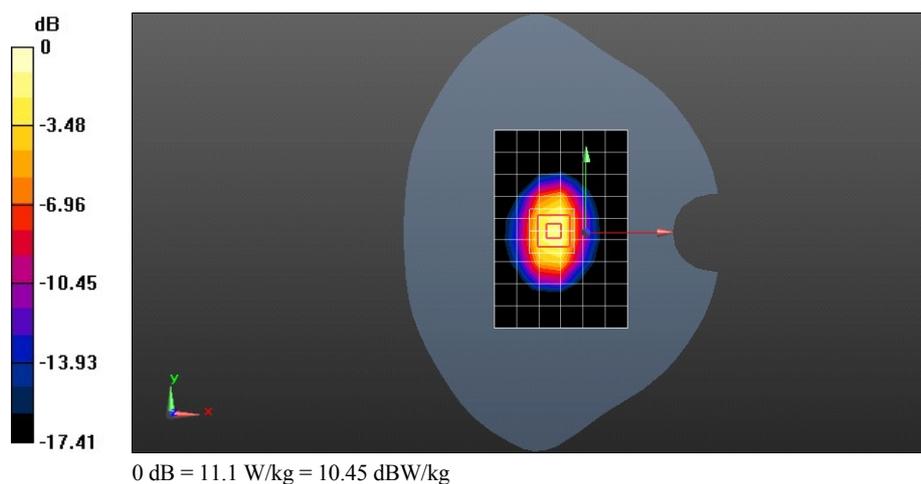

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D1900-EX-Head

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d143**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.409$  mho/m;  $\epsilon_r = 39.334$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn913; Calibrated: 2011-12-23
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

**Configuration/d=10mm, Pin=250mW/Area Scan (7x10x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 8.25 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 77.113 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 19.5 W/kg

**SAR(1 g) = 9.86 W/kg; SAR(10 g) = 4.95 W/kg**

Maximum value of SAR (measured) = 11.1 W/kg

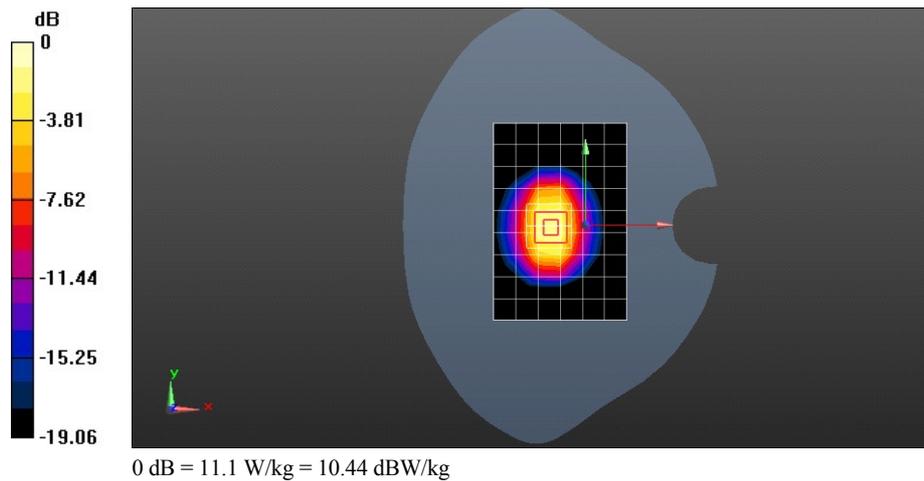

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D1900-EX-Body

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d143**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.535$  mho/m;  $\epsilon_r = 53.022$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn913; Calibrated: 2011-12-23
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

**Configuration/d=10mm, Pin=250mW/Area Scan (7x10x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 10.9 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 87.107 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 22.4 W/kg

**SAR(1 g) = 10.5 W/kg; SAR(10 g) = 5.28 W/kg**

Maximum value of SAR (measured) = 12.5 W/kg

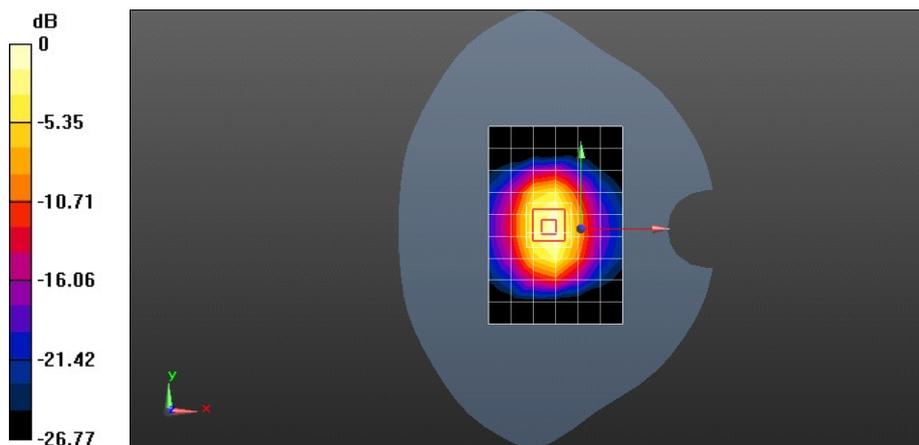

0 dB = 12.5 W/kg = 10.96 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D2450-EX-Head

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:860**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.824$  mho/m;  $\epsilon_r = 39.458$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

**Configuration/d=10mm, Pin=250mW/Area Scan (7x9x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 12.1 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 66.976 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 28.3 W/kg

**SAR(1 g) = 13 W/kg; SAR(10 g) = 5.85 W/kg**

Maximum value of SAR (measured) = 14.7 W/kg

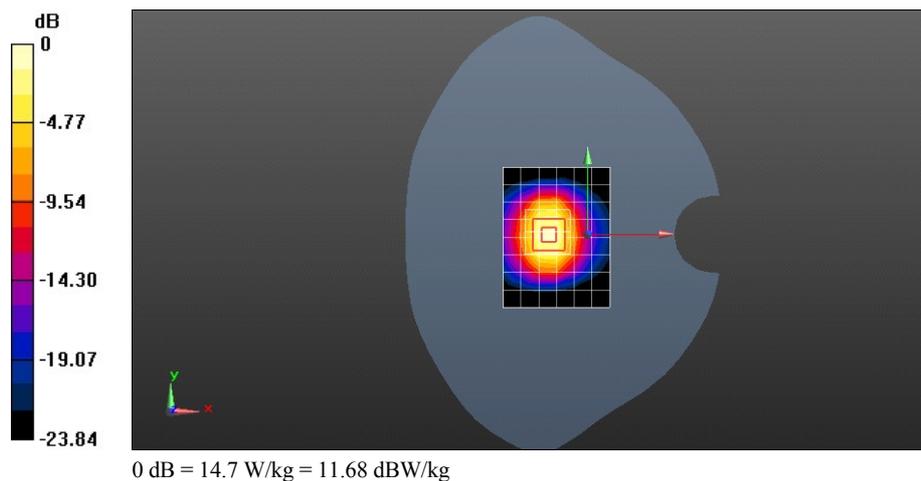

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D2450-EX-Body

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:860**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.989$  mho/m;  $\epsilon_r = 51.871$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.85, 6.85, 6.85); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

**Configuration/d=10mm, Pin=250mW/Area Scan (6x9x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 11.7 W/kg

**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 82.641 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 26.3 W/kg

**SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.68 W/kg**

Maximum value of SAR (measured) = 14.5 W/kg

