

# FCC Part15 Subpart C Test Report

Product Name : Home Gateway  
Model No. : HG530  
FCC ID : QISHG530

Applicant : Huawei Technologies Co., Ltd.

Address : Administration Building, Huawei Base, Bantian,  
Longgang District, Shenzhen 518129 P.R.C.

Date of Receipt : Apr. 14, 2010  
Test Date : Apr. 15, 2010 ~ Apr. 17, 2010  
Issued Date : Apr. 19, 2010  
Report No. : 104S031R-RF-US-P05V01  
Report Version : V1.1

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.  
The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

# Test Report Certification

Issued Date : Apr.19, 2010

Report No. : 104S031R-RF-US-P05V01



Product Name : Home Gateway

Applicant : Huawei Technologies Co., Ltd.

Address : Administration Building, Huawei Base, Bantian,  
Longgang District, Shenzhen 518129 P.R.C.

Manufacturer : Huawei Technologies Co., Ltd.

Address : Administration Building, Huawei Base, Bantian,  
Longgang District, Shenzhen 518129 P.R.C.

Model No. : HG530

FCC ID : QISHG530

EUT Voltage : DC 12V

Trade Name : HUAWEI

Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2008  
ANSI C63.4: 2003

Test Result : Complied

Performed Location : SuZhou EMC laboratory  
No.99 Hongye Rd., Suzhou Industrial Park Loufeng  
Hi-Tech Development Zone., SuZhou, China  
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098  
FCC Registration Number: 800392

Documented By : Alice Ni  
( Engineering ADM: Alice Ni )

Reviewed By : Marlin Chen  
( Engineering Supervisor: Marlin Chen )

Approved By : Dream Cao  
( Engineering Manager: Dream Cao )

## Laboratory Information

We, **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted(audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scope:

|                      |                         |
|----------------------|-------------------------|
| <b>Taiwan R.O.C.</b> | <b>: BSMI, NCC, TAF</b> |
| <b>Germany</b>       | <b>: TUV Rheinland</b>  |
| <b>Norway</b>        | <b>: Nemko, DNV</b>     |
| <b>USA</b>           | <b>: FCC, NVLAP</b>     |
| <b>Japan</b>         | <b>: VCCI</b>           |

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://www.quietek.com/tw/emc/accreditations/accreditations.htm>  
The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

### HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.

TEL:+886-3-592-8858 / FAX:+886-3-592-8859

E-Mail : [service@quietek.com](mailto:service@quietek.com)



### LinKou Testing Laboratory :

No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen, Lin-Kou Shiang, Taipei, Taiwan, R.O.C.

TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789

E-Mail : [service@quietek.com](mailto:service@quietek.com)



### Suzhou (China) Testing Laboratory :

No. 99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., Suzhou,China.

TEL : +86-512-6251-5088 / FAX : +86-512-6251-5098

E-Mail : [service@quietek.com](mailto:service@quietek.com)



## TABLE OF CONTENTS

| Description                               | Page |
|-------------------------------------------|------|
| 1. General Information .....              | 6    |
| 1.1. EUT Description .....                | 6    |
| 1.2. Mode of Operation .....              | 8    |
| 1.3. Tested System Details .....          | 9    |
| 1.4. Configuration of Tested System ..... | 10   |
| 1.5. EUT Exercise Software .....          | 11   |
| 2. Technical Test .....                   | 12   |
| 2.1. Summary of Test Result .....         | 12   |
| 2.2. Test Environment .....               | 13   |
| 3. Conducted Emission .....               | 14   |
| 3.1. Test Equipment .....                 | 14   |
| 3.2. Test Setup .....                     | 14   |
| 3.3. Limit.....                           | 15   |
| 3.4. Test Procedure .....                 | 15   |
| 3.5. Uncertainty .....                    | 15   |
| 3.6. Test Result .....                    | 16   |
| 4. Radiated Emission.....                 | 18   |
| 4.1. Test Equipment .....                 | 18   |
| 4.2. Test Setup .....                     | 19   |
| 4.3. Limit.....                           | 20   |
| 4.4. Test Procedure .....                 | 20   |
| 4.5. Uncertainty .....                    | 20   |
| 4.6. Test Result .....                    | 21   |
| 5. RF Antenna Conducted Spurious.....     | 25   |
| 5.1. Test Equipment .....                 | 25   |
| 5.2. Test Setup .....                     | 25   |
| 5.3. Limit.....                           | 25   |
| 5.4. Test Procedure .....                 | 26   |
| 5.5. Uncertainty .....                    | 26   |
| 5.6. Test Result .....                    | 27   |
| 6. Radiated Emission Band Edge .....      | 35   |
| 6.1. Test Equipment .....                 | 35   |
| 6.2. Test Setup .....                     | 36   |
| 6.3. Limit.....                           | 36   |
| 6.4. Test Procedure .....                 | 36   |
| 6.5. Uncertainty .....                    | 36   |
| 6.6. Test Result .....                    | 37   |

|       |                                                  |    |
|-------|--------------------------------------------------|----|
| 7.    | Operation Frequency Range of 20dB Bandwidth..... | 69 |
| 7.1.  | Test Equipment .....                             | 69 |
| 7.2.  | Test Setup .....                                 | 69 |
| 7.3.  | Limit.....                                       | 69 |
| 7.4.  | Test Procedure .....                             | 69 |
| 7.5.  | Uncertainty .....                                | 69 |
| 7.6.  | Test Result .....                                | 70 |
| 8.    | Occupied Bandwidth .....                         | 74 |
| 8.1.  | Test Equipment .....                             | 74 |
| 8.2.  | Test Setup .....                                 | 74 |
| 8.3.  | Limit.....                                       | 74 |
| 8.4.  | Test Procedure .....                             | 74 |
| 8.5.  | Uncertainty .....                                | 74 |
| 8.6.  | Test Result .....                                | 75 |
| 9.    | Power Output.....                                | 83 |
| 9.1.  | Test Equipment .....                             | 83 |
| 9.2.  | Test Setup .....                                 | 83 |
| 9.3.  | Limit.....                                       | 83 |
| 9.4.  | Test Procedure .....                             | 84 |
| 9.5.  | Uncertainty .....                                | 84 |
| 9.6.  | Test Result .....                                | 85 |
| 10.   | Power Spectral Density .....                     | 88 |
| 10.1. | Test Equipment.....                              | 88 |
| 10.2. | Test Setup.....                                  | 88 |
| 10.3. | Limit.....                                       | 88 |
| 10.4. | Test Procedure .....                             | 89 |
| 10.5. | Uncertainty .....                                | 89 |
| 10.6. | Test Result.....                                 | 90 |

## 1. General Information

### 1.1. EUT Description

|                     |                                                                  |
|---------------------|------------------------------------------------------------------|
| Product Name        | Home Gateway                                                     |
| Trade Name          | HUAWEI                                                           |
| Model No.           | HG530                                                            |
| EUT Voltage         | DC 12V                                                           |
| Frequency Range     | 802.11b/g/n(20MHz): 2412~2462MHz<br>802.11n(40MHz): 2422~2452MHz |
| Channel Number      | 802.11b/g/n(20MHz): 11<br>802.11n(40MHz): 7                      |
| Tech. of Modulation | 802.11b: DSSS                                                    |
|                     | 802.11g/n: OFDM                                                  |
| Data Rate           | 802.11g: 6/9/12/18/24/36/48/54 Mbps                              |
|                     | 802.11b: 1/2/5.5/11 Mbps                                         |
|                     | 802.11n: up to 135 Mbps                                          |
| Channel Control     | Auto                                                             |
| Antenna Delivery    | 1*Tx + 1*Rx                                                      |
| Antenna Type        | PCB                                                              |
| Peak Antenna Gain   | 2dBi for 2.4GHz band                                             |

Note: The product has two kinds of patterns: Including the WPS function and non-WPS function. Two kinds of the patterns both have the outer coverings of picture frame and waterfall.

Note: HG530 was used for testing with number 1 adapter listed as follows.

| Component     |                                                                                                                                                                           |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AC Adapter #1 | SWITCHING POWER ADAPTER<br>Manufacturer: Dongguan Shilong Fuhua Electronic Co.,Ltd.<br>Model: UE06L4-120050SPAU<br>Input: 100-240V~, 50/60Hz, 0.2A<br>Output: 12VDC, 0.5A |
| AC Adapter #2 | Switching Adapter<br>Manufacturer: ShenZhen Frecom Electronics Co., Ltd.<br>Model: FPS005USA-120050<br>Input: 100-240V~, 50/60Hz, 300mA<br>Output: 12VDC, 0.5A            |

# Channel List

| 802.11b/g/n(20MHz) Working Frequency of Each Channel: |           |         |           |         |           |         |           |
|-------------------------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                                               | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 01                                                    | 2412 MHz  | 02      | 2417 MHz  | 03      | 2422 MHz  | 04      | 2427 MHz  |
| 05                                                    | 2432 MHz  | 06      | 2437 MHz  | 07      | 2442 MHz  | 08      | 2447 MHz  |
| 09                                                    | 2452 MHz  | 10      | 2457 MHz  | 11      | 2462 MHz  | N/A     | N/A       |
| 802.11n(40MHz) Working Frequency of Each Channel:     |           |         |           |         |           |         |           |
| Channel                                               | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 03                                                    | 2422 MHz  | 04      | 2427 MHz  | 05      | 2432 MHz  | 06      | 2437 MHz  |
| 07                                                    | 2442 MHz  | 08      | 2447 MHz  | 09      | 2452 MHz  | N/A     | N/A       |

## 1.2. Mode of Operation

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

| Test Mode                            |
|--------------------------------------|
| Mode 1: Transmit by 802.11b          |
| Mode 2: Transmit by 802.11g          |
| Mode 3: Transmit by 802.11 n (20MHz) |
| Mode 4: Transmit by 802.11n (40MHz)  |

Note:


1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. This device is a composite device in accordance with Part 15 Subpart B regulations. The function for the receiver was measured and made a test report that the report number is 104S031R -RF-US-P01V02.

### 1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

| Product |            | Manufacturer | Model No.   | Serial No.    | Power Cord         |
|---------|------------|--------------|-------------|---------------|--------------------|
| 1       | Notebook   | DELL         | PP19L       | JH097 A01     | Power by adapter   |
| 2       | Rounter    | D-Link       | DIR-605     | PK11496006143 | Non-Shielded, 1.8m |
| 3       | IP Express | ZyXEL        | IES-1248-71 | S523825530    | Non-Shielded, 1.8m |

## 1.4. Configuration of Tested System

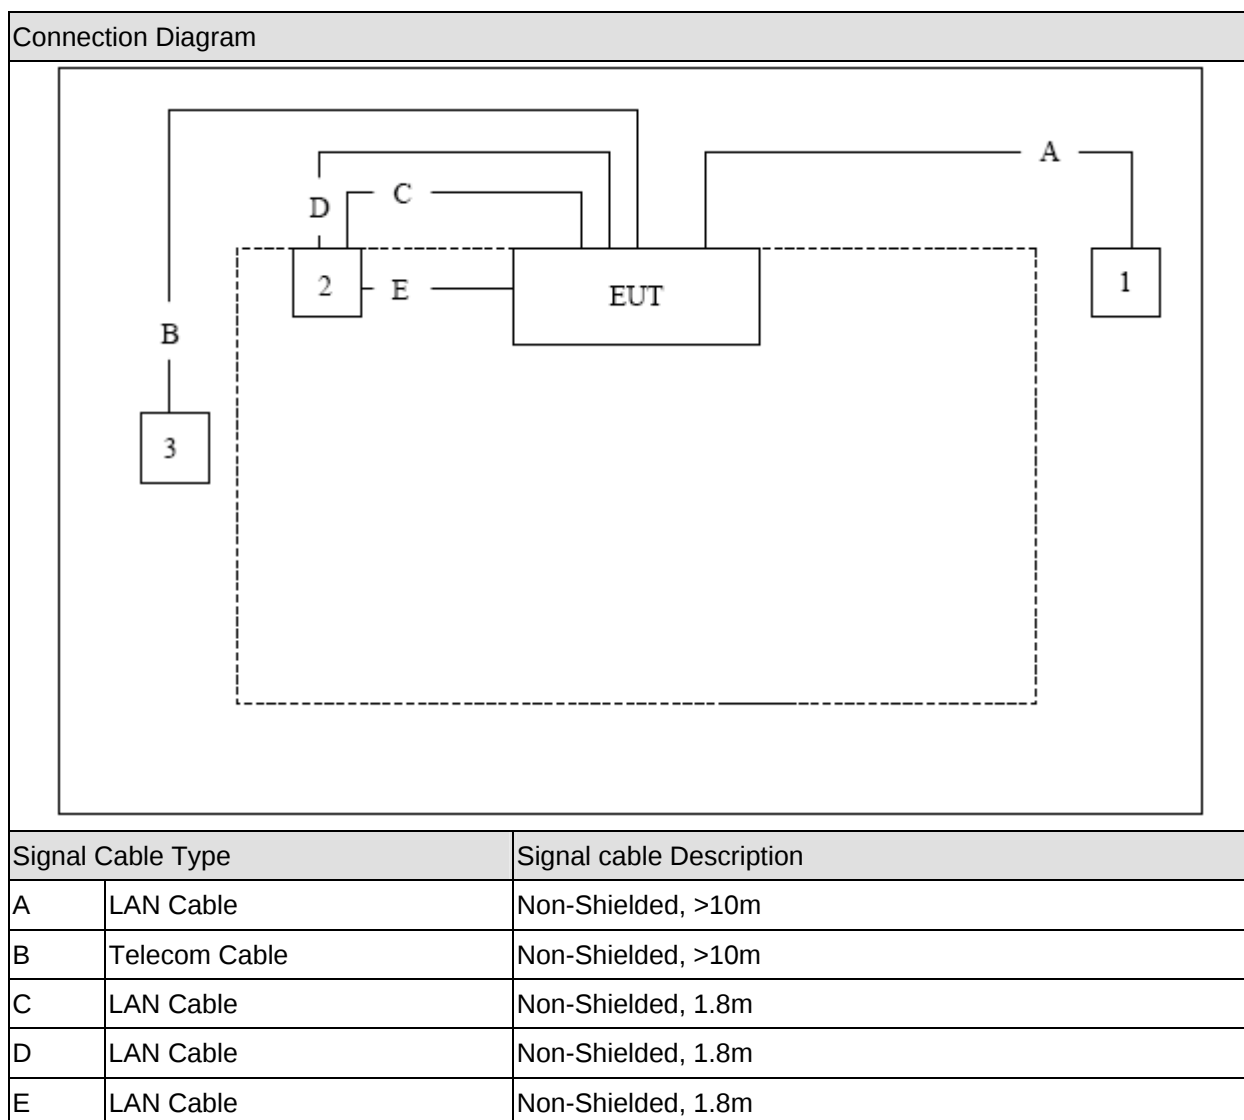

**1.5. EUT Exercise Software**

|   |                                                                                                     |
|---|-----------------------------------------------------------------------------------------------------|
| 1 | Setup the EUT and simulators as shown on above                                                      |
| 2 | Turn on the power of equipment.                                                                     |
| 3 | Input the commands in Super Terminal of Notebook (1), make the EUT transmit or receive, start test. |

## 2. Technical Test

### 2.1. Summary of Test Result

- ☒ No deviations from the test standards  
☐ Deviations from the test standards as below description:

| Performed Test Item                         | Normative References                                          | Test Performed | Deviation |
|---------------------------------------------|---------------------------------------------------------------|----------------|-----------|
| Conducted Emission                          | FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.207       | Yes            | No        |
| Radiated Emission                           | FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.209       | Yes            | No        |
| RF Antenna Conducted Spurious               | FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(d)    | Yes            | No        |
| Radiated Emission Band Edge                 | FCC CFR Title 47 Part 15 Subpart C: 2008 15.247(d)            | Yes            | No        |
| Operation Frequency Range of 20dB Bandwidth | FCC CFR Title 47 Part 15 Subpart C: 2008 15.215(c)            | Yes            | No        |
| Occupied Bandwidth                          | FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(a)(2) | Yes            | No        |
| Power Output                                | FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(b)(3) | Yes            | No        |
| Power Spectral Density                      | FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(e)    | Yes            | No        |

## 2.2. Test Environment

| Items                      | Required (IEC 68-1) | Actual   |
|----------------------------|---------------------|----------|
| Temperature (°C)           | 15-35               | 21       |
| Humidity (%RH)             | 25-75               | 50       |
| Barometric pressure (mbar) | 860-1060            | 950-1000 |

### 3. Conducted Emission


#### 3.1. Test Equipment

Conducted Emission / SR-1

| Instrument                 | Manufacturer | Type No. | Serial No. | Cal. Date  |
|----------------------------|--------------|----------|------------|------------|
| EMI Test Receiver          | R&S          | ESCI     | 100906     | 2010/01/15 |
| Two-Line V-Network         | R&S          | ENV216   | 100043     | 2009/09/07 |
| Two-Line V-Network         | R&S          | ENV216   | 100044     | 2009/09/07 |
| 50ohm Coaxial Switch       | Anritsu      | MP59B    | 6200464462 | 2009/05/25 |
| 50ohm Termination          | SHX          | TF2      | 07081401   | 2009/09/29 |
| Temperature/Humidity Meter | zhicheng     | ZC1-2    | SR1-TH     | 2010/01/14 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

#### 3.2. Test Setup

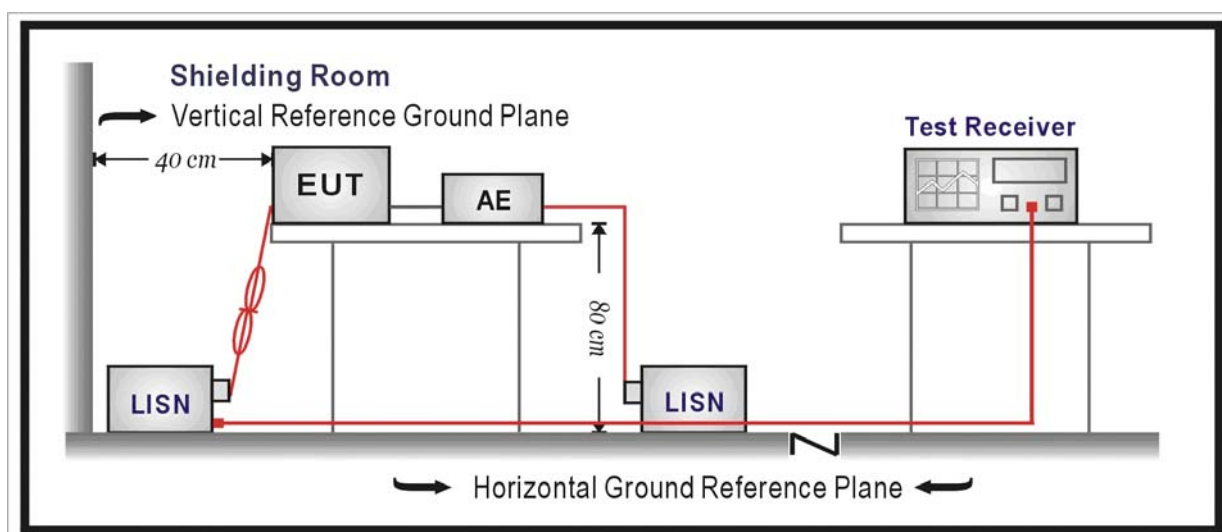

### 3.3. Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits |           |           |
|-----------------------------------------------|-----------|-----------|
| Frequency (MHz)                               | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50                                   | 66 - 56   | 56 - 46   |
| 0.50 - 5.0                                    | 56        | 46        |
| 5.0 - 30                                      | 60        | 50        |

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

### 3.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2003 and tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)

Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.


The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

### 3.5. Uncertainty

The measurement uncertainty is defined as  $\pm 2.02$  dB


## 3.6. Test Result

|                                          |                          |
|------------------------------------------|--------------------------|
| Profile: 104S031R                        | Page No.: 2              |
| Engineer: Jame                           |                          |
| Site: SR1                                | Time: 2010/04/15 - 17:11 |
| Limit: FCC_Part15.207_CE_AC Power_ClassB | Margin: 0                |
| Probe: ENV216_101043(0.009-30MHz)        | Polarity: Line           |
| EUT: Home Gateway                        | Power: AC 120V/60Hz      |
| Note: Mode 1                             |                          |

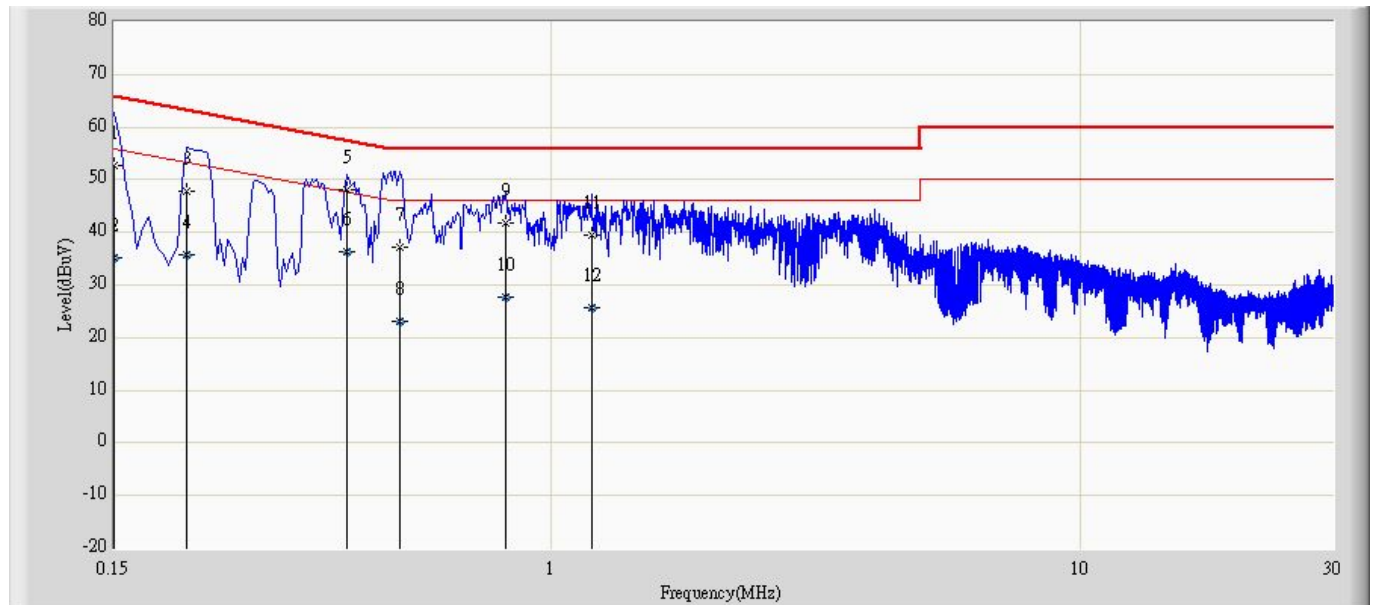

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV) | Factor | Type |
|----|------|------|-----------------|----------------------|----------------------|-----------------|--------------|--------|------|
| 1  |      | *    | 0.15            | 52.614               | 43.027               | -13.386         | 66           | 9.588  | QP   |
| 2  |      |      | 0.15            | 35.246               | 25.659               | -20.754         | 56           | 9.588  | AV   |
| 3  |      |      | 0.206           | 47.737               | 38.068               | -15.628         | 63.365       | 9.669  | QP   |
| 4  |      |      | 0.206           | 35.766               | 26.097               | -17.599         | 53.365       | 9.669  | AV   |
| 5  |      |      | 0.414           | 48.226               | 38.537               | -9.342          | 57.568       | 9.688  | QP   |
| 6  |      |      | 0.414           | 36.193               | 26.505               | -11.375         | 47.568       | 9.688  | AV   |
| 7  |      |      | 0.518           | 37.206               | 27.516               | -18.794         | 56           | 9.69   | QP   |
| 8  |      |      | 0.518           | 23.041               | 13.351               | -22.959         | 46           | 9.69   | AV   |
| 9  |      |      | 0.822           | 41.659               | 31.977               | -14.341         | 56           | 9.682  | QP   |
| 10 |      |      | 0.822           | 27.738               | 18.056               | -18.262         | 46           | 9.682  | AV   |
| 11 |      |      | 1.194           | 39.607               | 29.921               | -16.393         | 56           | 9.686  | QP   |
| 12 |      |      | 1.194           | 25.799               | 16.113               | -20.201         | 46           | 9.686  | AV   |

|                                          |                          |
|------------------------------------------|--------------------------|
| Profile: 104S031R                        | Page No.: 3              |
| Engineer: Jame                           |                          |
| Site: SR1                                | Time: 2010/04/15 - 17:18 |
| Limit: FCC_Part15.207_CE_AC Power_ClassB | Margin: 0                |
| Probe: ENV216_101043(0.009-30MHz)        | Polarity: Neutral        |
| EUT: Home Gateway                        | Power: AC 120V/60Hz      |
| Note: Mode 1                             |                          |

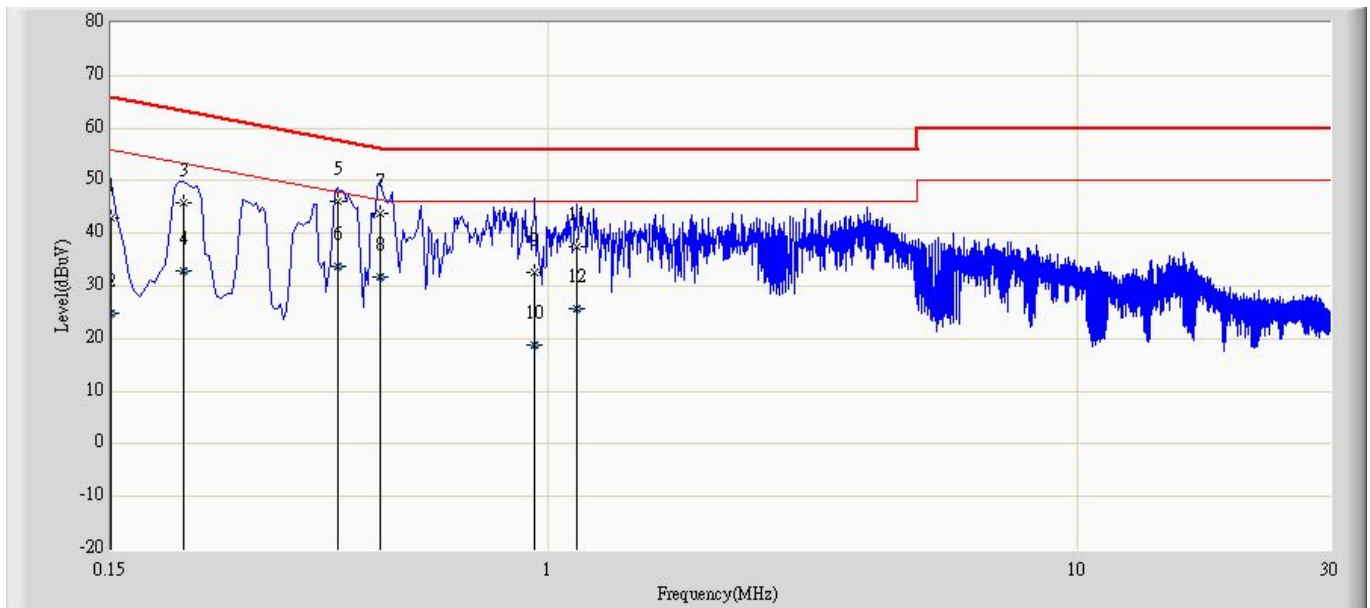

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV) | Factor | Type |
|----|------|------|-----------------|----------------------|----------------------|-----------------|--------------|--------|------|
| 1  |      |      | 0.15            | 42.815               | 33.074               | -23.185         | 66           | 9.741  | QP   |
| 2  |      |      | 0.15            | 24.879               | 15.138               | -31.121         | 56           | 9.741  | AV   |
| 3  |      |      | 0.206           | 45.895               | 36.233               | -17.47          | 63.365       | 9.662  | QP   |
| 4  |      |      | 0.206           | 32.775               | 23.113               | -20.59          | 53.365       | 9.662  | AV   |
| 5  |      | *    | 0.402           | 46.005               | 36.344               | -11.807         | 57.812       | 9.661  | QP   |
| 6  |      |      | 0.402           | 33.624               | 23.963               | -14.188         | 47.812       | 9.661  | AV   |
| 7  |      |      | 0.482           | 43.656               | 33.987               | -12.649         | 56.305       | 9.669  | QP   |
| 8  |      |      | 0.482           | 31.833               | 22.163               | -14.472         | 46.305       | 9.669  | AV   |
| 9  |      |      | 0.946           | 32.509               | 22.793               | -23.491         | 56           | 9.716  | QP   |
| 10 |      |      | 0.946           | 18.834               | 9.118                | -27.166         | 46           | 9.716  | AV   |
| 11 |      |      | 1.134           | 37.38                | 27.662               | -18.62          | 56           | 9.719  | QP   |
| 12 |      |      | 1.134           | 25.558               | 15.839               | -20.442         | 46           | 9.719  | AV   |

## 4. Radiated Emission

### 4.1. Test Equipment


☒ Radiated Emission / AC-5

| Instrument                 | Manufacturer | Type No.         | Serial No.  | Cal. Date  |
|----------------------------|--------------|------------------|-------------|------------|
| Spectrum Analyzer          | Agilent      | N9010A           | MY48030494  | 2009/04/23 |
| EMI Test Receiver          | R&S          | ESI26            | 838786/004  | 2009/06/26 |
| Preamplifier               | Quietek      | AP-180C          | CHM-0602013 | 2009/05/25 |
| Preamplifier               | Quietek      | AP-040G          | CHM-0906001 | 2009/06/18 |
| Bilog Antenna              | Teseq GmbH   | CBL6112D         | 27612       | 2009/11/12 |
| Broad-Band Horn Antenna    | Schwarzbeck  | BBHA9120D        | 499         | 2009/06/11 |
| High-Pass Filter           | Wainwright   | WHKX2.8/18G-12SS | SN1         | 2010/03/03 |
| High-Pass Filter           | Wainwright   | WHKX7.0/18G-8SS  | SN16        | 2010/03/03 |
| Lowpass Filter             | Wainwright   | WLKS4500-9SS     | SN2         | 2010/03/03 |
| Temperature/Humidity Meter | Zhicheng     | ZC1-2            | AC5-TH      | 2010/01/14 |


Note 1: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

## 4.2. Test Setup

Below 1GHz Test Setup:

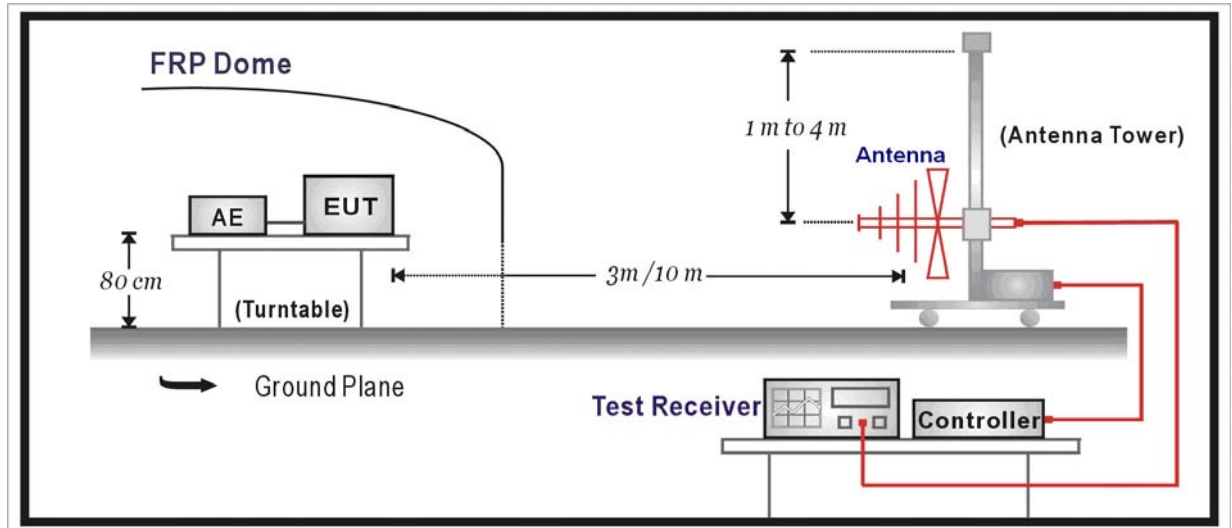

Above 1GHz Test Setup:

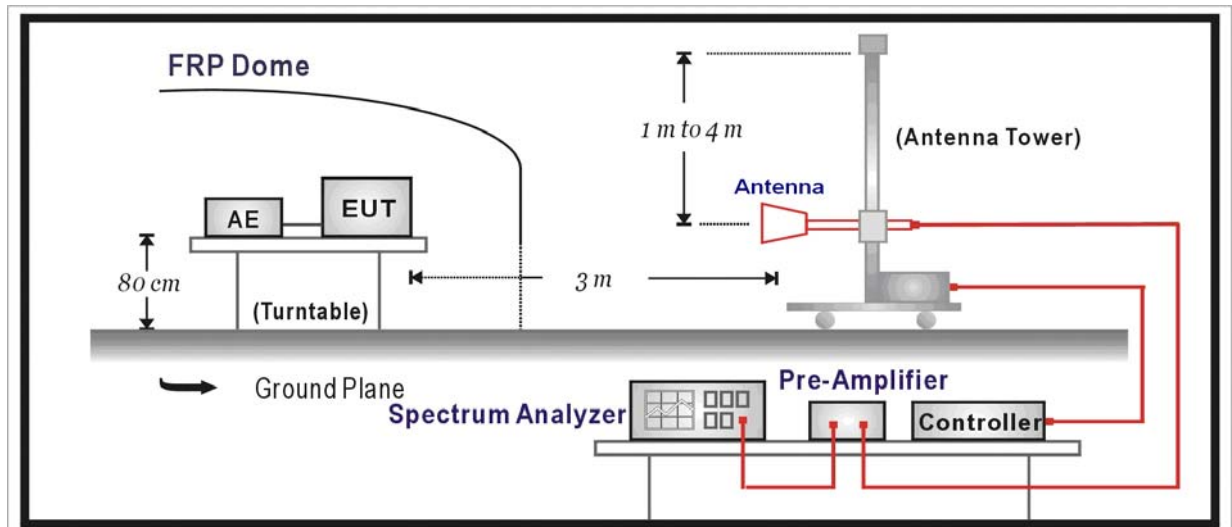

#### 4.3. Limit

| FCC Part 15 Subpart C Paragraph 15.209 |              |                |
|----------------------------------------|--------------|----------------|
| Frequency (MHz)                        | Distance (m) | Level (dBuV/m) |
| 30 - 88                                | 3            | 40             |
| 88 - 216                               | 3            | 43.5           |
| 216 - 960                              | 3            | 46             |
| Above 960                              | 3            | 54             |

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

#### 4.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2003 and tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2003 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the "cone of radiation" of EUT. The 3dB beamwidth is 10~60 degrees for H-plane and 10~90 degrees for E-plane.

#### 4.5. Uncertainty

The measurement uncertainty above 1G is defined as  $\pm 3.9$  dB  
below 1G is defined as  $\pm 3.8$  dB

#### 4.6. Test Result

All of the test result shown indicates the worst case, and spectrum analyzer parameters setting as shown below:

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 200ms;

Average detector: RBW = 1MHz, VBW = 10Hz, sweep time = auto.

Measure Level = Reading Level + Cable Loss + Antenna Factor - Preamplifier Gain

802.11b

| CH | Antenna | Frequen<br>cy<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Factor<br>(dB) | Measure<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector |
|----|---------|------------------------|------------------------------|----------------|------------------------------|-------------------|----------------|----------|
| 1  | V       | 2411.9                 | 74.2                         | 30.8           | 105.0                        | Fundamental       | /              | PK       |
|    | H       | 300.1                  | 55.0                         | -16.7          | 38.3                         | 46                | -7.7           | QP       |
|    | H       | 575.1                  | 40.6                         | -10.4          | 30.2                         | 46                | -15.8          | QP       |
|    | V       | 3252.5                 | 55.8                         | -4.6           | 51.2                         | 54                | -2.8           | PK       |
|    | V       | 4824.0                 | 55.0                         | 0.4            | 55.4                         | 74                | -18.6          | PK       |
|    | V       | 4824.0                 | 52.4                         | 0.4            | 52.8                         | 54                | -1.2           | AV       |
|    | V       | 7236.0                 | 38.5                         | 6.8            | 45.3                         | 54                | -8.7           | PK       |
|    | V       | 24000.0                | 59.1                         | -8.9           | 50.2                         | 54                | -3.8           | PK       |
| 6  | V       | 2435.3                 | 74.4                         | 30.9           | 105.3                        | Fundamental       | /              | PK       |
|    | H       | 300.1                  | 55.0                         | -16.7          | 38.3                         | 46                | -7.7           | QP       |
|    | H       | 575.1                  | 40.6                         | -10.4          | 30.2                         | 46                | -15.8          | QP       |
|    | V       | 3252.5                 | 55.8                         | -4.6           | 51.2                         | 54                | -2.8           | PK       |
|    | V       | 4874.0                 | 54.6                         | 0.2            | 54.8                         | 74                | -19.2          | PK       |
|    | V       | 4874.0                 | 52.2                         | 0.2            | 52.4                         | 54                | -1.6           | AV       |
|    | V       | 7311.0                 | 37.5                         | 6.7            | 44.3                         | 54                | -9.7           | PK       |
|    | V       | 24000.0                | 59.1                         | -8.9           | 50.2                         | 54                | -3.8           | PK       |
| 11 | V       | 2462.1                 | 73.1                         | 31.0           | 104.1                        | Fundamental       | /              | PK       |
|    | H       | 300.1                  | 55.0                         | -16.7          | 38.3                         | 46                | -7.7           | QP       |
|    | H       | 575.1                  | 40.6                         | -10.4          | 30.2                         | 46                | -15.8          | QP       |
|    | V       | 3252.5                 | 55.8                         | -4.6           | 51.2                         | 54                | -2.8           | PK       |
|    | V       | 4924.0                 | 54.9                         | 0.4            | 55.3                         | 74                | -18.7          | PK       |
|    | V       | 4924.0                 | 51.4                         | 0.4            | 51.8                         | 54                | -2.2           | AV       |
|    | V       | 7386.0                 | 38.8                         | 6.7            | 45.5                         | 54                | -8.5           | PK       |
|    | V       | 24000.0                | 59.1                         | -8.9           | 50.2                         | 54                | -3.8           | PK       |

802.11g

| CH | Antenna | Frequency (MHz) | Reading Level (dBuV/m) | Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|----|---------|-----------------|------------------------|-------------|------------------------|----------------|-------------|----------|
| 1  | V       | 2411.6          | 76.9                   | 30.8        | 107.7                  | Fundamental    | /           | PK       |
|    | H       | 300.1           | 55.0                   | -16.7       | 38.3                   | 46             | -7.7        | QP       |
|    | H       | 575.1           | 40.6                   | -10.4       | 30.2                   | 46             | -15.8       | QP       |
|    | V       | 3252.5          | 55.8                   | -4.6        | 51.2                   | 54             | -2.8        | PK       |
|    | V       | 4824.0          | 57.1                   | 0.4         | 57.5                   | 74             | -16.5       | PK       |
|    | V       | 4824.0          | 44.3                   | 0.4         | 44.7                   | 54             | -9.3        | AV       |
|    | V       | 7236.0          | 38.2                   | 6.8         | 45.0                   | 54             | -9.0        | PK       |
|    | V       | 24000.0         | 59.1                   | -8.9        | 50.2                   | 54             | -3.8        | PK       |
| 6  | V       | 2435.1          | 76.2                   | 30.9        | 107.1                  | Fundamental    | /           | PK       |
|    | H       | 300.1           | 55.0                   | -16.7       | 38.3                   | 46             | -7.7        | QP       |
|    | H       | 575.1           | 40.6                   | -10.4       | 30.2                   | 46             | -15.8       | QP       |
|    | V       | 2999.6          | 59.1                   | -17.4       | 41.7                   | 54             | -12.3       | PK       |
|    | V       | 4874.0          | 53.9                   | 0.2         | 54.1                   | 74             | -19.9       | PK       |
|    | V       | 4874.0          | 40.6                   | 0.2         | 40.8                   | 54             | -13.2       | AV       |
|    | V       | 7311.0          | 37.3                   | 6.7         | 44.0                   | 54             | -10.0       | PK       |
|    | V       | 24000.0         | 59.1                   | -8.9        | 50.2                   | 54             | -3.8        | PK       |
| 11 | V       | 2461.8          | 75.9                   | 31.0        | 106.9                  | Fundamental    | /           | PK       |
|    | H       | 300.1           | 55.0                   | -16.7       | 38.3                   | 46             | -7.7        | QP       |
|    | H       | 575.1           | 40.6                   | -10.4       | 30.2                   | 46             | -15.8       | QP       |
|    | V       | 3252.5          | 55.8                   | -4.6        | 51.2                   | 54             | -2.8        | PK       |
|    | V       | 4924.0          | 51.7                   | 0.4         | 52.1                   | 54             | -1.9        | PK       |
|    | V       | 7386.0          | 38.4                   | 6.7         | 45.1                   | 54             | -8.9        | PK       |
|    | V       | 24000.0         | 59.1                   | -8.9        | 50.2                   | 54             | -3.8        | PK       |

## 802.11n(20MHz)

| CH | Antenna | Frequen<br>cy<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Factor<br>(dB) | Measure<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector |
|----|---------|------------------------|------------------------------|----------------|------------------------------|-------------------|----------------|----------|
| 1  | V       | 2415.7                 | 76.0                         | 30.8           | 106.8                        | Fundamental       | /              | PK       |
|    | H       | 300.1                  | 55.0                         | -16.7          | 38.3                         | 46                | -7.7           | QP       |
|    | H       | 575.1                  | 40.6                         | -10.4          | 30.2                         | 46                | -15.8          | QP       |
|    | V       | 3252.5                 | 55.8                         | -4.6           | 51.2                         | 54                | -2.8           | PK       |
|    | V       | 4824.0                 | 58.5                         | 0.4            | 58.9                         | 74                | -15.1          | PK       |
|    | V       | 4824.0                 | 44.2                         | 0.4            | 44.6                         | 54                | -9.4           | AV       |
|    | V       | 7236.0                 | 38.3                         | 6.8            | 45.1                         | 54                | -8.9           | PK       |
|    | V       | 24000.0                | 59.1                         | -8.9           | 50.2                         | 54                | -3.8           | PK       |
| 6  | V       | 2439.3                 | 75.4                         | 30.9           | 106.3                        | Fundamental       | /              | PK       |
|    | H       | 300.1                  | 55.0                         | -16.7          | 38.3                         | 46                | -7.7           | QP       |
|    | H       | 575.1                  | 40.6                         | -10.4          | 30.2                         | 46                | -15.8          | QP       |
|    | V       | 3252.5                 | 55.8                         | -4.6           | 51.2                         | 54                | -2.8           | PK       |
|    | V       | 4874.0                 | 55.7                         | 0.2            | 55.9                         | 74                | -18.1          | PK       |
|    | V       | 4874.0                 | 41.3                         | 0.2            | 41.5                         | 54                | -12.5          | AV       |
|    | V       | 7311.0                 | 37.6                         | 6.7            | 44.3                         | 54                | -9.7           | PK       |
|    | V       | 24000.0                | 59.1                         | -8.9           | 50.2                         | 54                | -3.8           | PK       |
|    | H       | 357.6                  | 18.0                         | 18.3           | 36.3                         | 46                | -9.7           | QP       |
| 11 | V       | 2464.6                 | 75.2                         | 31.0           | 106.2                        | Fundamental       | /              | PK       |
|    | H       | 300.1                  | 55.0                         | -16.7          | 38.3                         | 46                | -7.7           | QP       |
|    | H       | 575.1                  | 40.6                         | -10.4          | 30.2                         | 46                | -15.8          | QP       |
|    | V       | 3252.5                 | 55.8                         | -4.6           | 51.2                         | 54                | -2.8           | PK       |
|    | V       | 4924.0                 | 53.2                         | 0.4            | 53.6                         | 54                | -0.4           | PK       |
|    | V       | 7386.0                 | 38.8                         | 6.7            | 45.5                         | 54                | -8.5           | PK       |
|    | V       | 24000.0                | 59.1                         | -8.9           | 50.2                         | 54                | -3.8           | PK       |

802.11n(40MHz)

| CH | Antenna | Frequency (MHz) | Reading Level (dBuV/m) | Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|----|---------|-----------------|------------------------|-------------|------------------------|----------------|-------------|----------|
| 3  | V       | 2415.6          | 74.7                   | 30.8        | 105.5                  | Fundamental    | /           | PK       |
|    | H       | 300.1           | 55.0                   | -16.7       | 38.3                   | 46             | -7.7        | QP       |
|    | H       | 575.1           | 40.6                   | -10.4       | 30.2                   | 46             | -15.8       | QP       |
|    | V       | 3252.5          | 55.8                   | -4.6        | 51.2                   | 54             | -2.8        | PK       |
|    | V       | 4844.0          | 53.9                   | 0.4         | 54.3                   | 74             | -19.7       | PK       |
|    | V       | 4844.0          | 39.2                   | 0.4         | 39.6                   | 54             | -14.4       | AV       |
|    | V       | 7266.0          | 37.9                   | 6.9         | 44.8                   | 54             | -9.2        | PK       |
|    | V       | 24000.0         | 59.1                   | -8.9        | 50.2                   | 54             | -3.8        | PK       |
| 6  | V       | 2435.3          | 74.2                   | 30.9        | 105.1                  | Fundamental    | /           | PK       |
|    | H       | 300.1           | 55.0                   | -16.7       | 38.3                   | 46             | -7.7        | QP       |
|    | H       | 575.1           | 40.6                   | -10.4       | 30.2                   | 46             | -15.8       | QP       |
|    | V       | 3252.5          | 55.8                   | -4.6        | 51.2                   | 54             | -2.8        | PK       |
|    | V       | 4874.0          | 54.1                   | 0.2         | 54.3                   | 74             | -19.7       | PK       |
|    | V       | 4874.0          | 40.7                   | 0.2         | 40.9                   | 54             | -13.1       | AV       |
|    | V       | 7311.0          | 38.1                   | 6.7         | 44.8                   | 54             | -9.2        | PK       |
|    | V       | 24000.0         | 59.1                   | -8.9        | 50.2                   | 54             | -3.8        | PK       |
| 9  | V       | 2446.9          | 73.6                   | 30.9        | 104.5                  | Fundamental    | /           | PK       |
|    | H       | 300.1           | 55.0                   | -16.7       | 38.3                   | 46             | -7.7        | QP       |
|    | H       | 575.1           | 40.6                   | -10.4       | 30.2                   | 46             | -15.8       | QP       |
|    | V       | 3252.5          | 55.8                   | -4.6        | 51.2                   | 54             | -2.8        | PK       |
|    | V       | 4904.0          | 52.9                   | 0.3         | 53.1                   | 54             | -0.9        | PK       |
|    | V       | 7356.0          | 39.3                   | 6.6         | 45.9                   | 54             | -8.1        | PK       |
|    | V       | 24000.0         | 59.1                   | -8.9        | 50.2                   | 54             | -3.8        | PK       |

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

## 5. RF Antenna Conducted Spurious


### 5.1. Test Equipment

RF Antenna Conducted Spurious / AC-6

| Instrument                 | Manufacturer | Type No. | Serial No. | Cal. Date  |
|----------------------------|--------------|----------|------------|------------|
| Spectrum Analyzer          | Agilent      | N9020A   | MY49100159 | 2009/05/06 |
| Temperature/Humidity Meter | zhicheng     | ZC1-2    | AC6-TH     | 2010/01/14 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 5.2. Test Setup

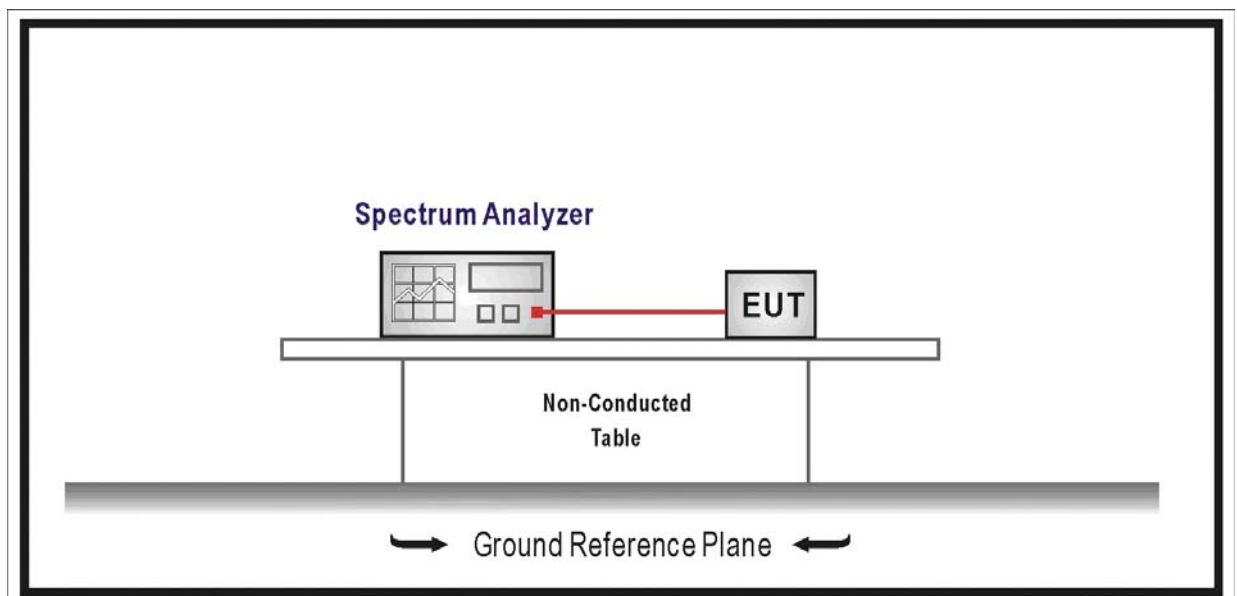

### 5.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

#### **5.4. Test Procedure**

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.


#### **5.5. Uncertainty**

The measurement uncertainty is defined as  $\pm 1.27$  dB


## 5.6. Test Result

|           |   |                               |
|-----------|---|-------------------------------|
| Product   | : | Home Gateway                  |
| Test Item | : | RF Antenna Conducted Spurious |
| Test Mode | : | Mode 1: Transmit by 802.11b   |


Channel 01 (2412MHz)

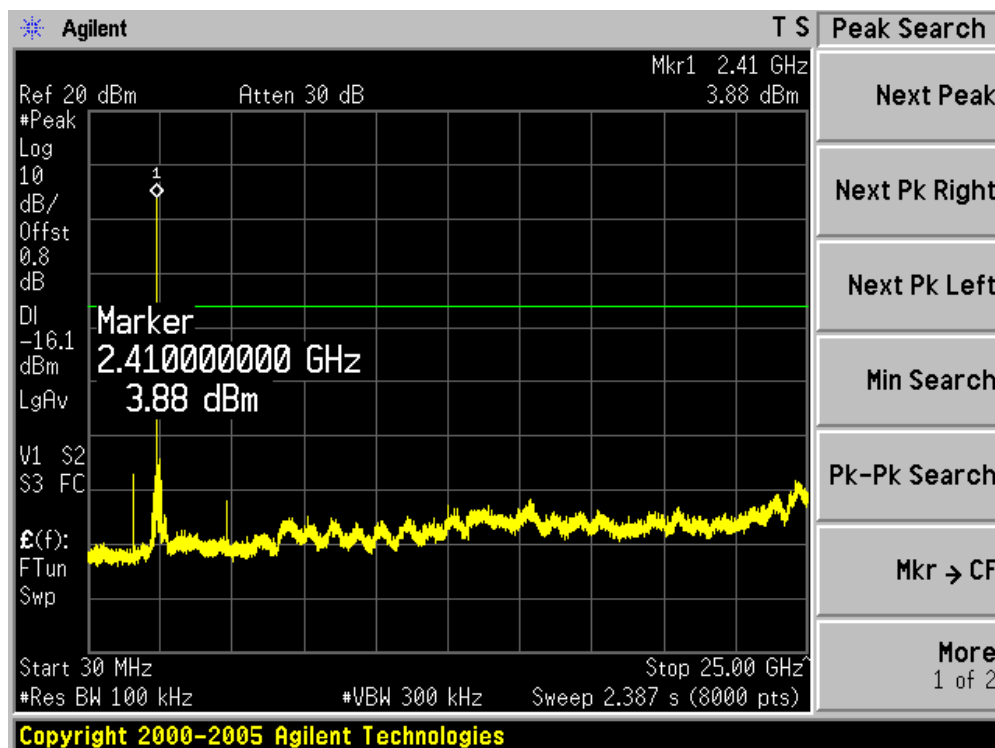

Channel 06 (2437MHz)

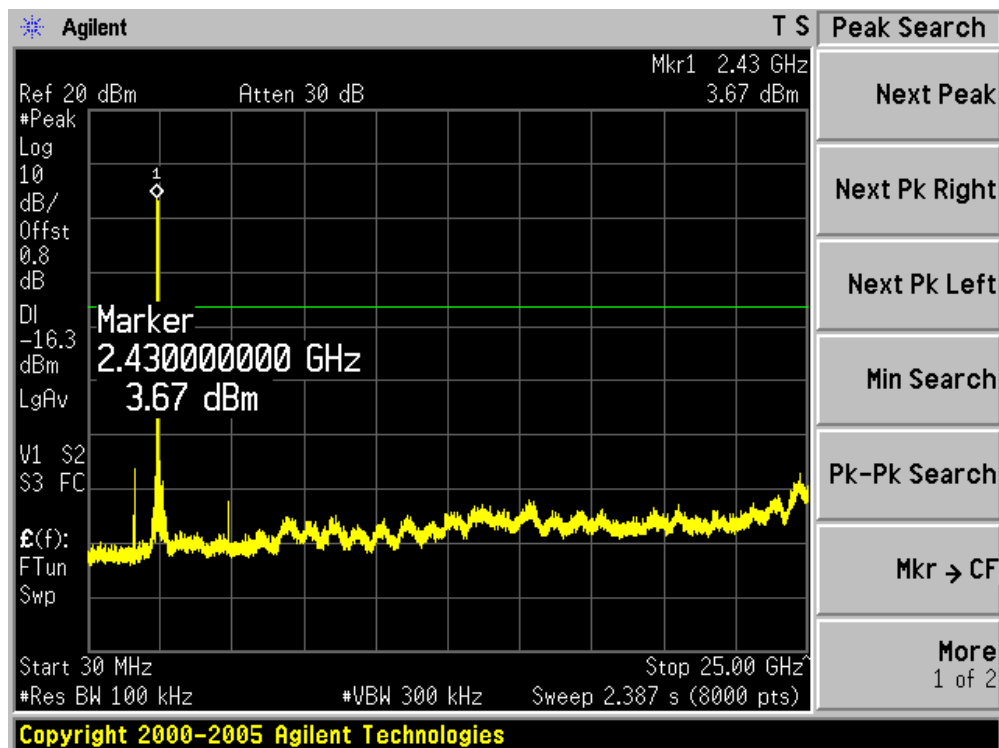


Channel 11 (2462MHz)

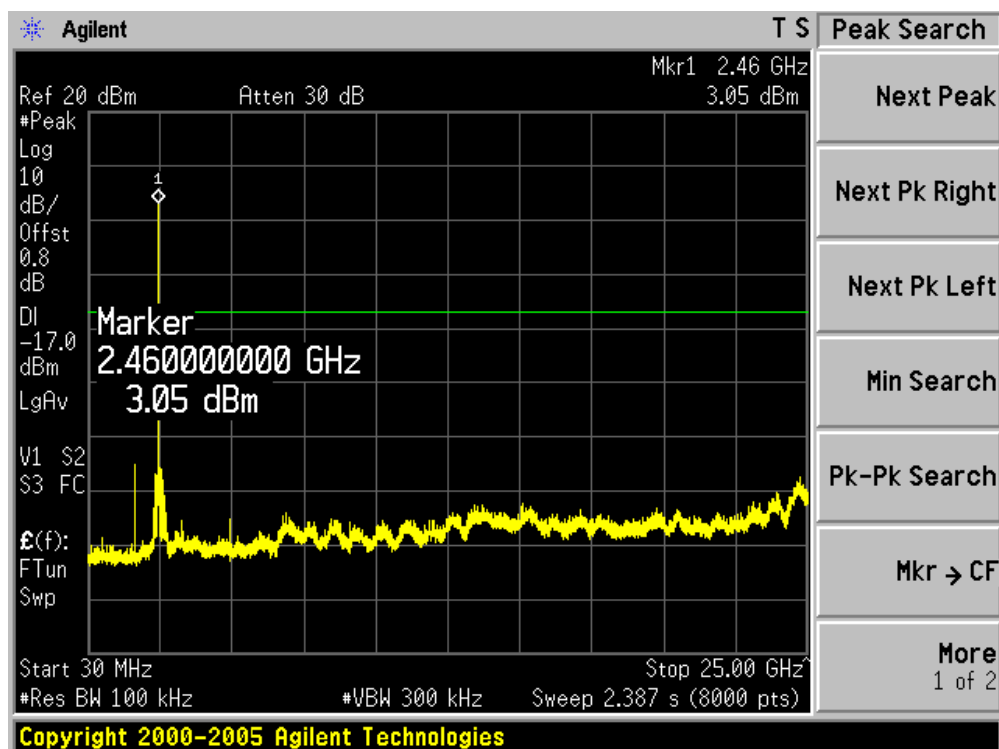


|           |   |                               |
|-----------|---|-------------------------------|
| Product   | : | Home Gateway                  |
| Test Item | : | RF Antenna Conducted Spurious |
| Test Mode | : | Mode 2: Transmit by 802.11g   |


Channel 01 (2412MHz)

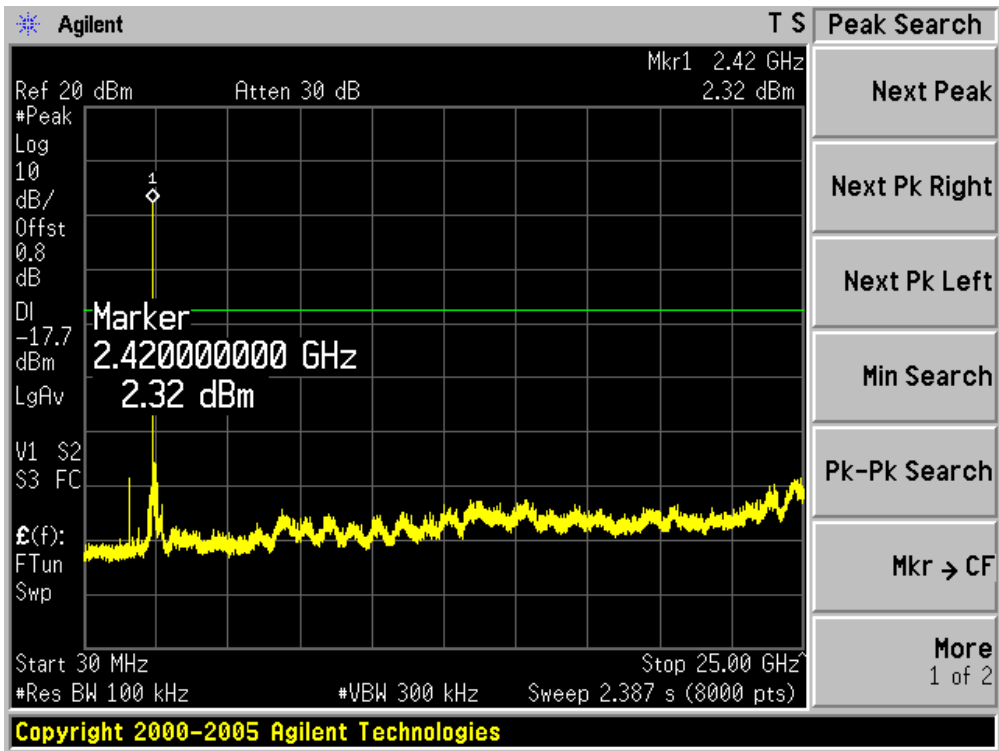

Channel 06 (2437MHz)

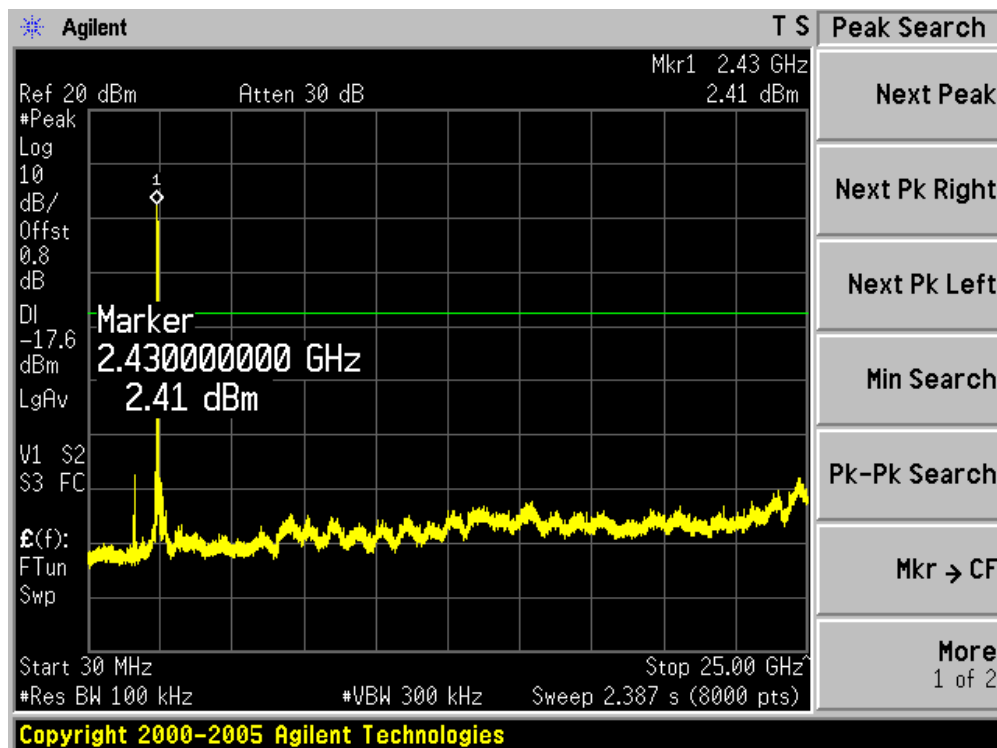


Channel 11 (2462MHz)

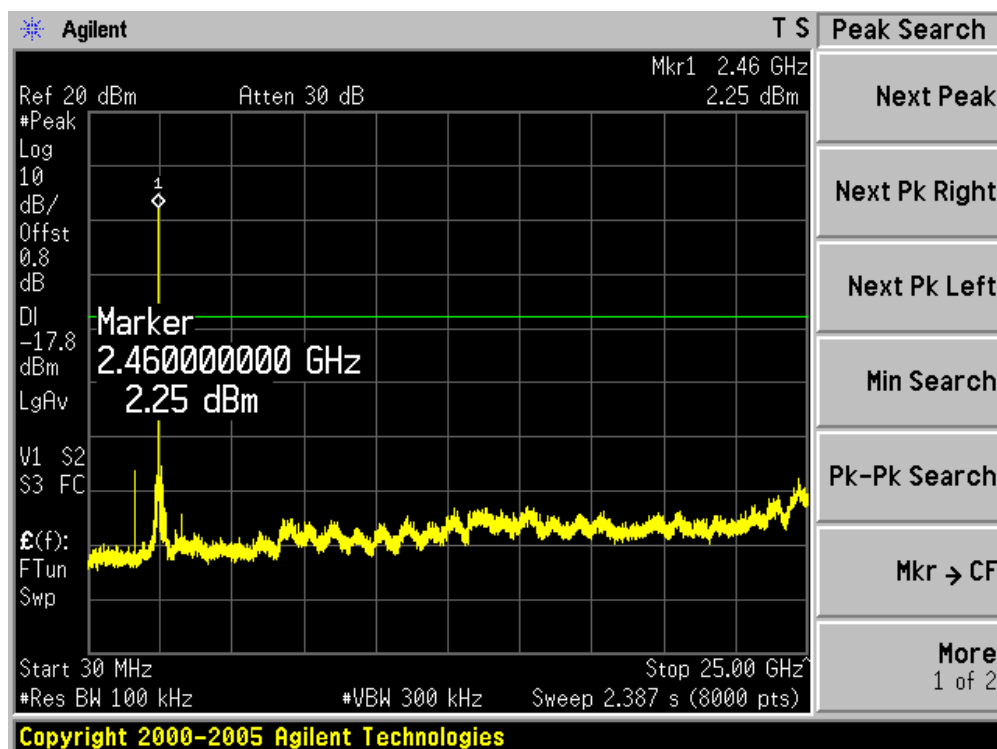


|           |   |                                     |
|-----------|---|-------------------------------------|
| Product   | : | Home Gateway                        |
| Test Item | : | RF Antenna Conducted Spurious       |
| Test Mode | : | Mode 3: Transmit by 802.11n (20MHz) |


Channel 01 (2412MHz)

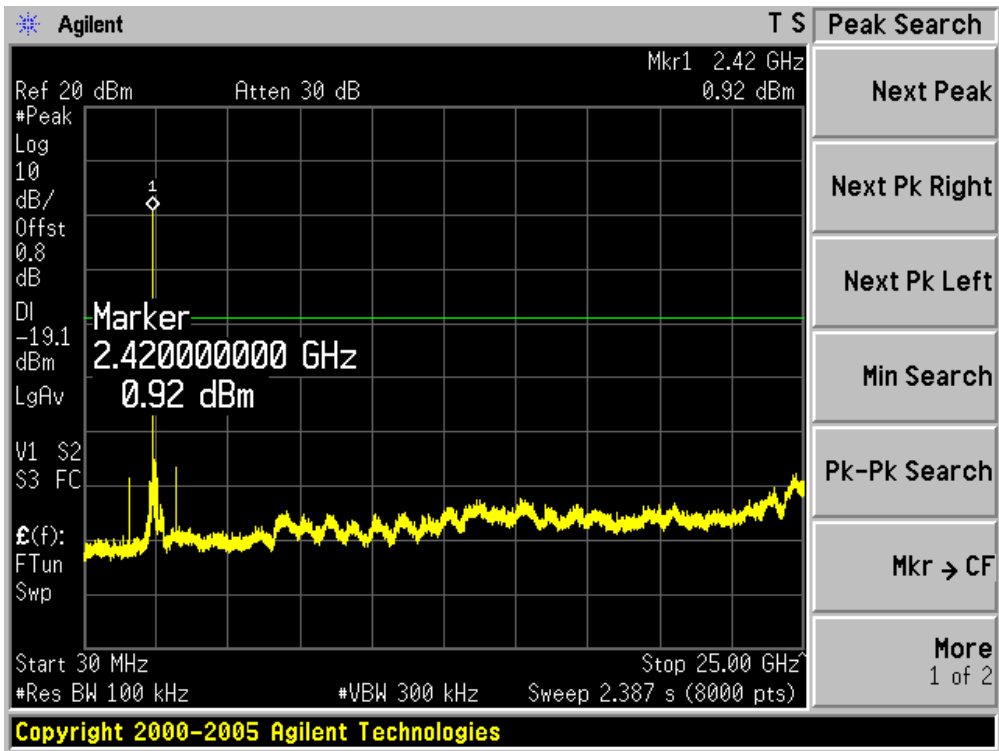

Channel 06 (2437MHz)

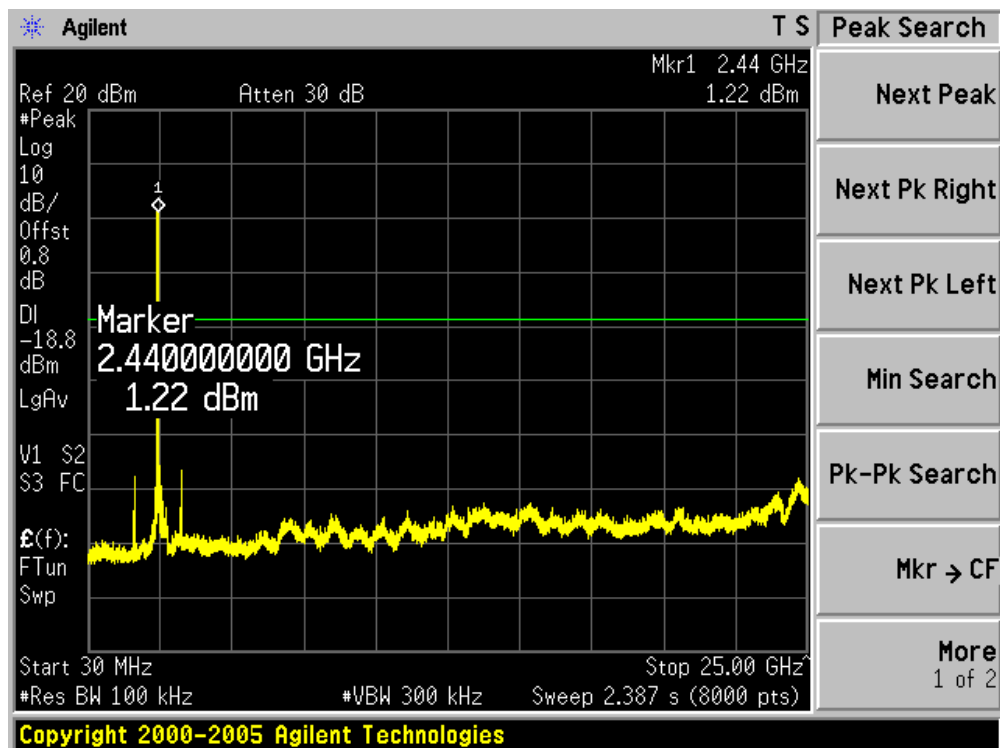


Channel 11 (2462MHz)

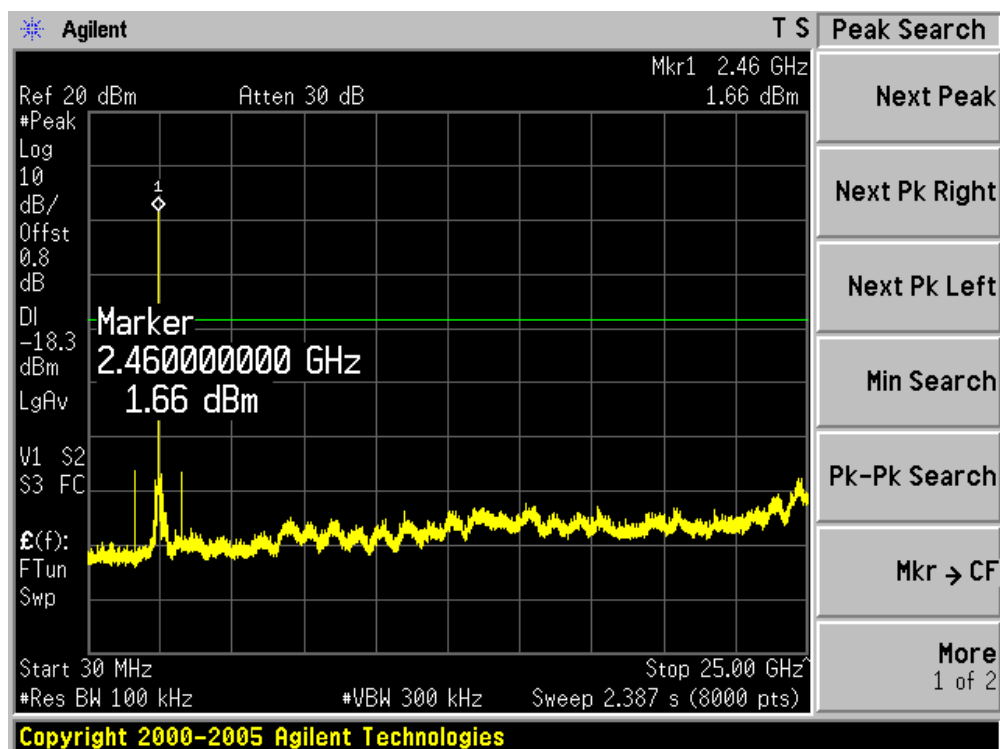


|           |   |                                    |
|-----------|---|------------------------------------|
| Product   | : | Home Gateway                       |
| Test Item | : | RF Antenna Conducted Spurious      |
| Test Mode | : | Mode 4: Transmit by 802.11n(40MHz) |


## Channel 03 (2422MHz)

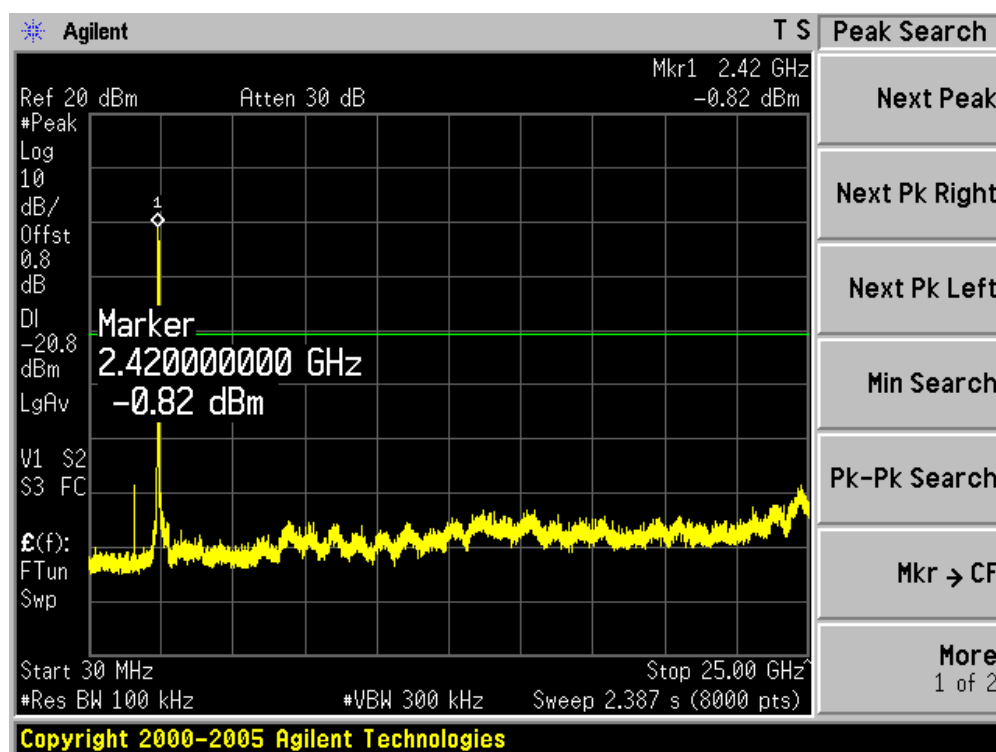

Channel 06 (2437MHz)

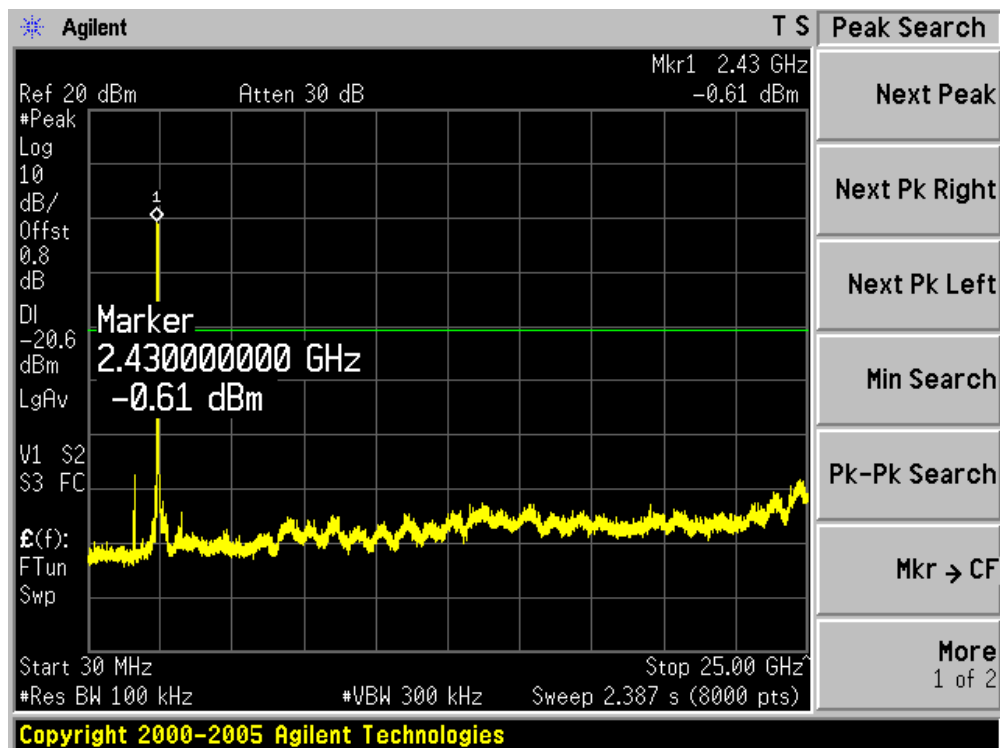

Channel 09 (2452MHz)

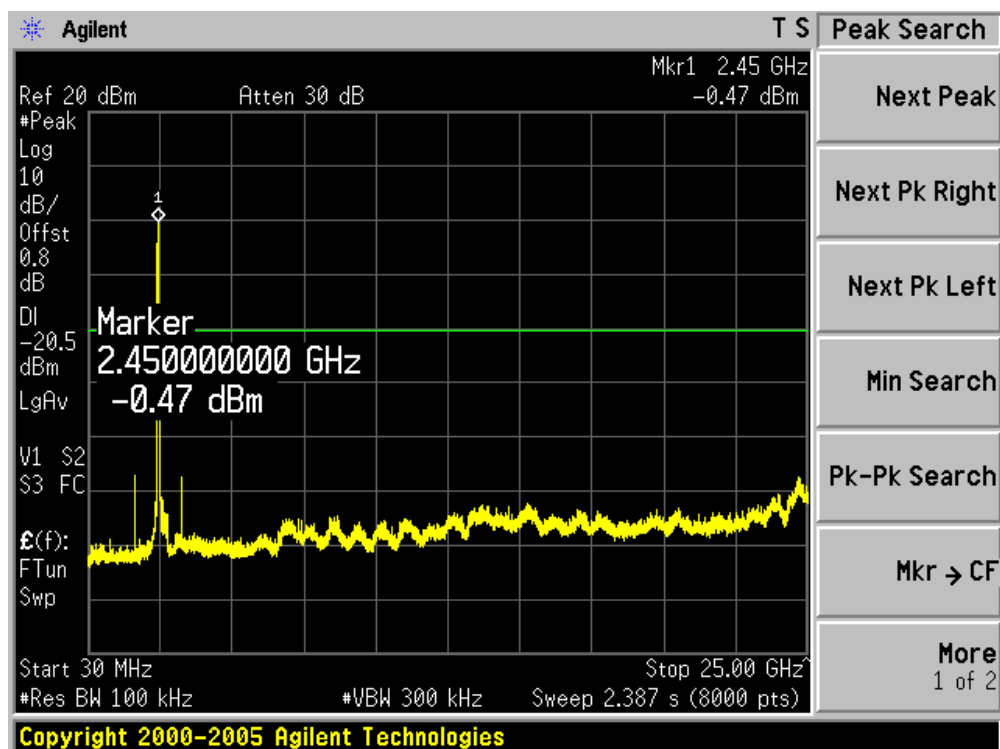

## 6. Radiated Emission Band Edge

### 6.1. Test Equipment


☒ Radiated Emission / AC-5

| Instrument                 | Manufacturer | Type No.  | Serial No. | Cal. Date  |
|----------------------------|--------------|-----------|------------|------------|
| Spectrum Analyzer          | Agilent      | N9010A    | MY48030494 | 2009/04/23 |
| Broad-Band Horn Antenna    | Schwarzbeck  | BBHA9120D | 499        | 2009/06/11 |
| Temperature/Humidity Meter | Zhicheng     | ZC1-2     | AC5-TH     | 2010/01/14 |

Note 1: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

Note 2: The test instruments marked with "X" are used to measure the final test results.

## 6.2. Test Setup

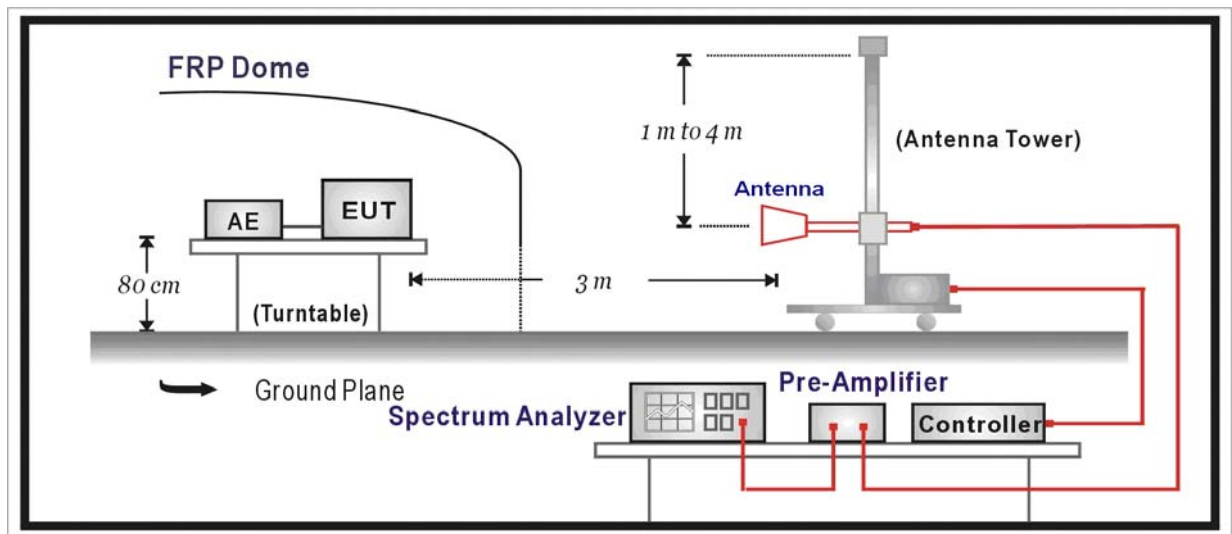

## 6.3. Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

## 6.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2003 and tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements. The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2003 on radiated measurement.

## 6.5. Uncertainty


The measurement uncertainty above 1G is defined as  $\pm 3.9$  dB

## 6.6. Test Result

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 200ms;


Average detector: RBW = 1MHz, VBW = 10Hz, sweep time = auto.

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 3              |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:02 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Horizontal     |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 1: Transmit at channel 2412MHz By 802.11b |                          |

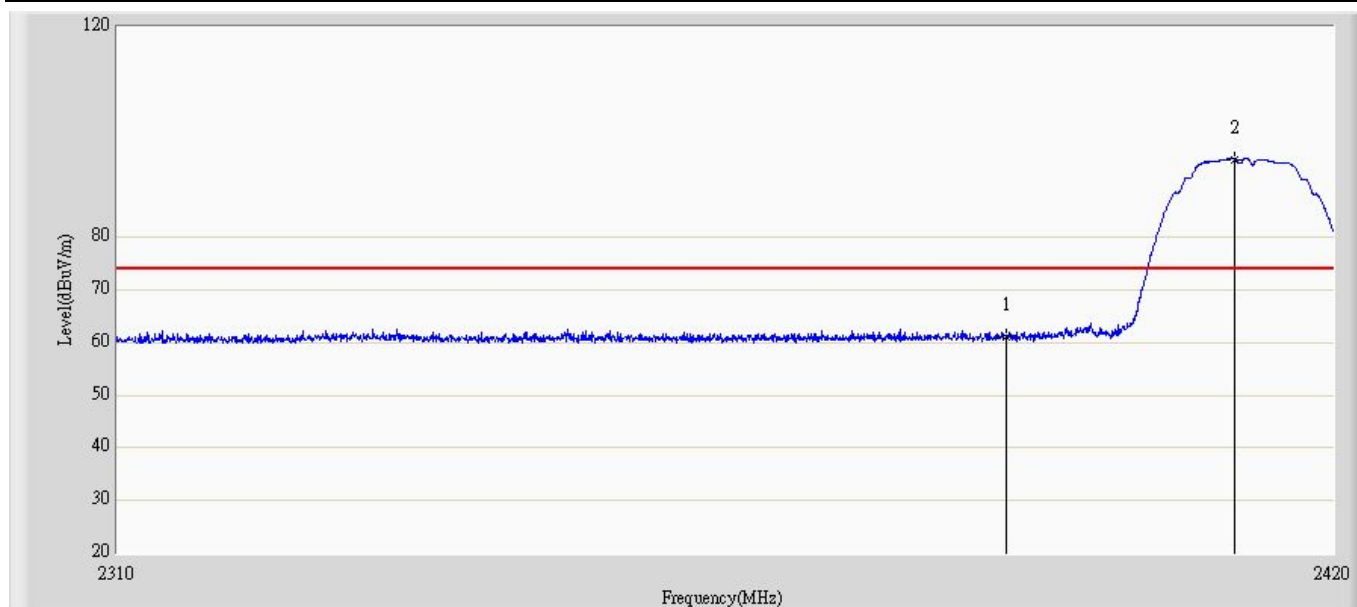


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2390            | 61.172                 | 30.26                | -12.828         | 74             | 30.911 | PK   |
| 2  | X    | *    | 2410.98         | 94.829                 | 63.952               | N/A             | N/A            | 30.877 | PK   |

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 4              |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:06 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Horizontal     |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 1: Transmit at channel 2412MHz By 802.11b |                          |

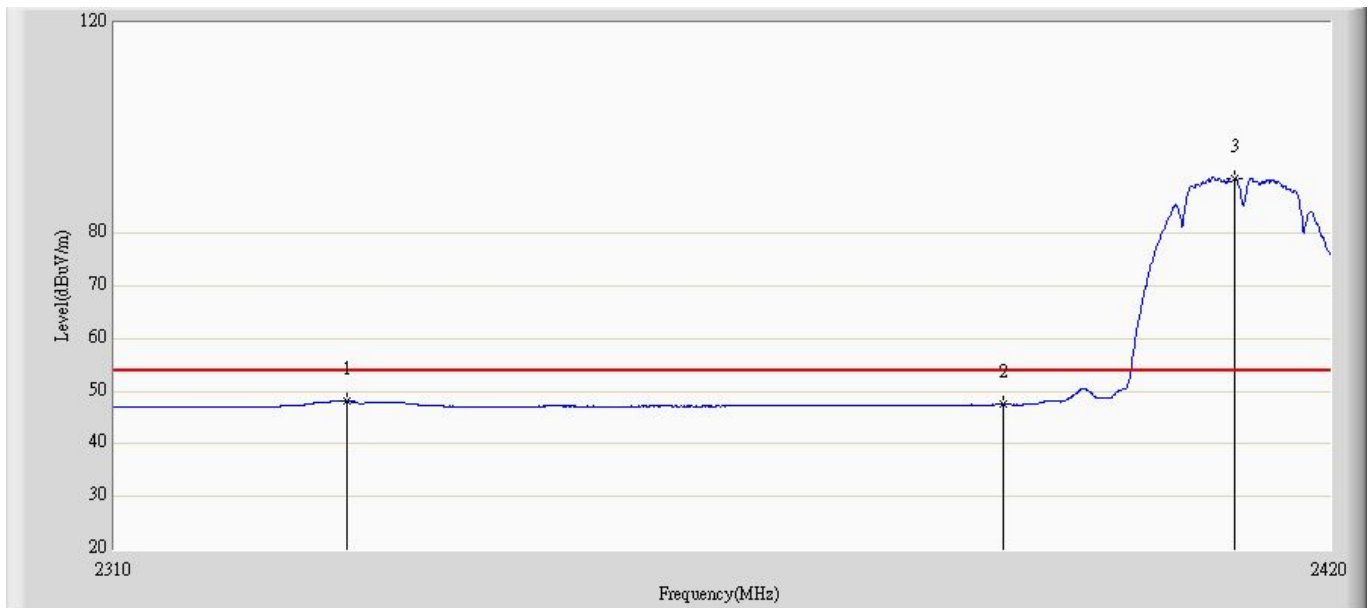

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2330.68         | 48.05                  | 17.077               | -5.95           | 54             | 30.973 | AV   |
| 2  |      |      | 2390            | 47.514                 | 16.602               | -6.486          | 54             | 30.911 | AV   |
| 3  | X    | *    | 2411.255        | 90.484                 | 59.608               | N/A             | N/A            | 30.876 | AV   |

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 5              |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:08 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Vertical       |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 1: Transmit at channel 2412MHz By 802.11b |                          |

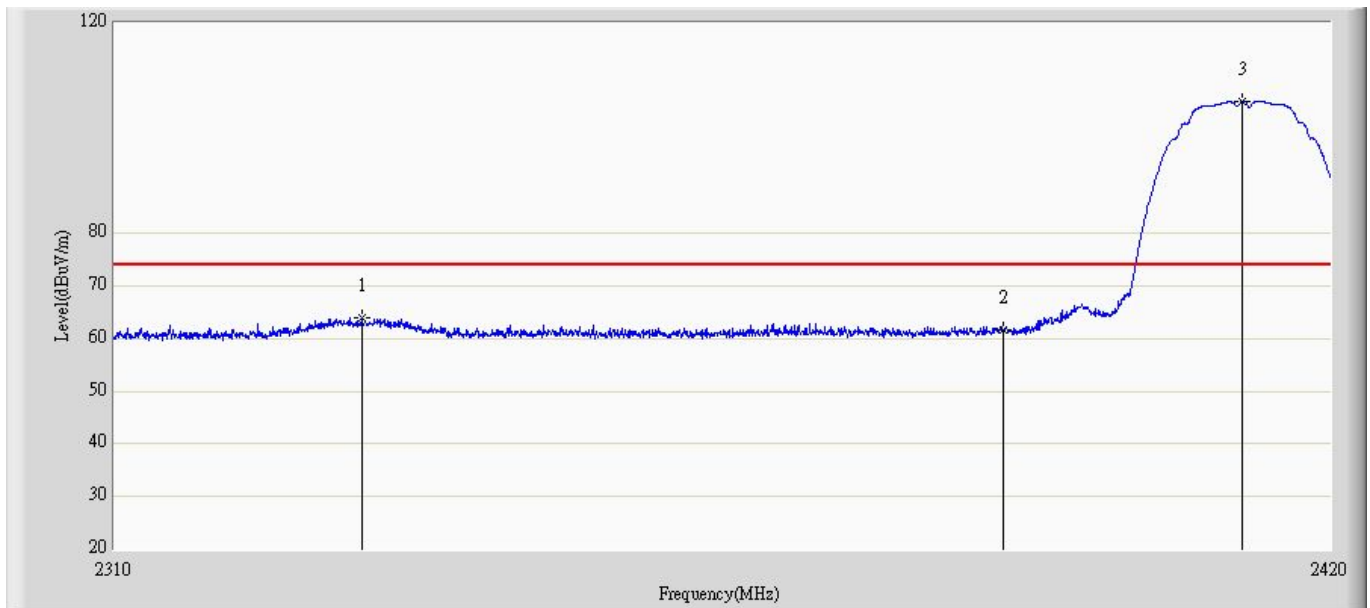


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2332            | 63.971                 | 33.001               | -10.029         | 74             | 30.97  | PK   |
| 2  |      |      | 2390            | 61.613                 | 30.701               | -12.387         | 74             | 30.911 | PK   |
| 3  | X    | *    | 2411.915        | 105.15                 | 74.276               | N/A             | N/A            | 30.874 | PK   |

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 6              |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:11 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Vertical       |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 1: Transmit at channel 2412MHz By 802.11b |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2333.43         | 51.61                  | 20.643               | -2.39           | 54             | 30.967 | AV   |
| 2  |      |      | 2390            | 48.803                 | 17.891               | -5.197          | 54             | 30.911 | AV   |
| 3  | X    | *    | 2411.365        | 99.853                 | 68.977               | N/A             | N/A            | 30.876 | AV   |

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 7              |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:14 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Horizontal     |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 1: Transmit at channel 2462MHz By 802.11b |                          |

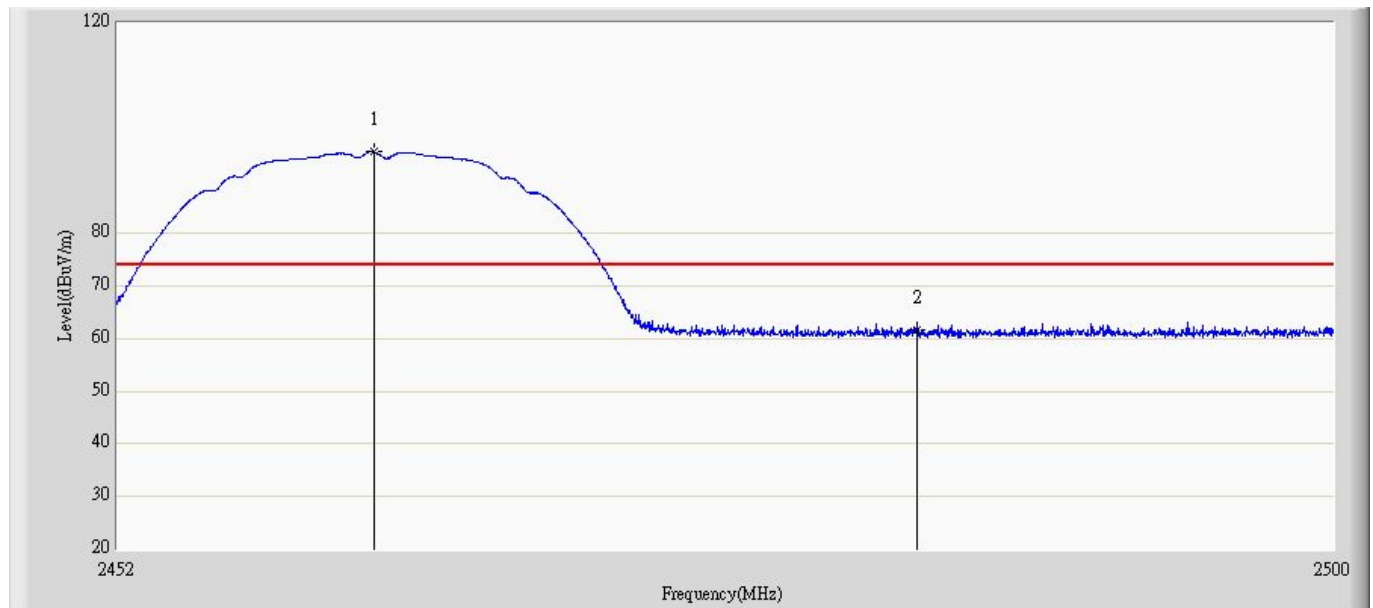


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2462.08         | 95.455                 | 64.414               | N/A             | N/A            | 31.041 | PK   |
| 2  |      |      | 2483.5          | 61.63                  | 30.696               | -12.37          | 74             | 30.934 | PK   |

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 8              |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:18 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Horizontal     |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 1: Transmit at channel 2462MHz By 802.11b |                          |

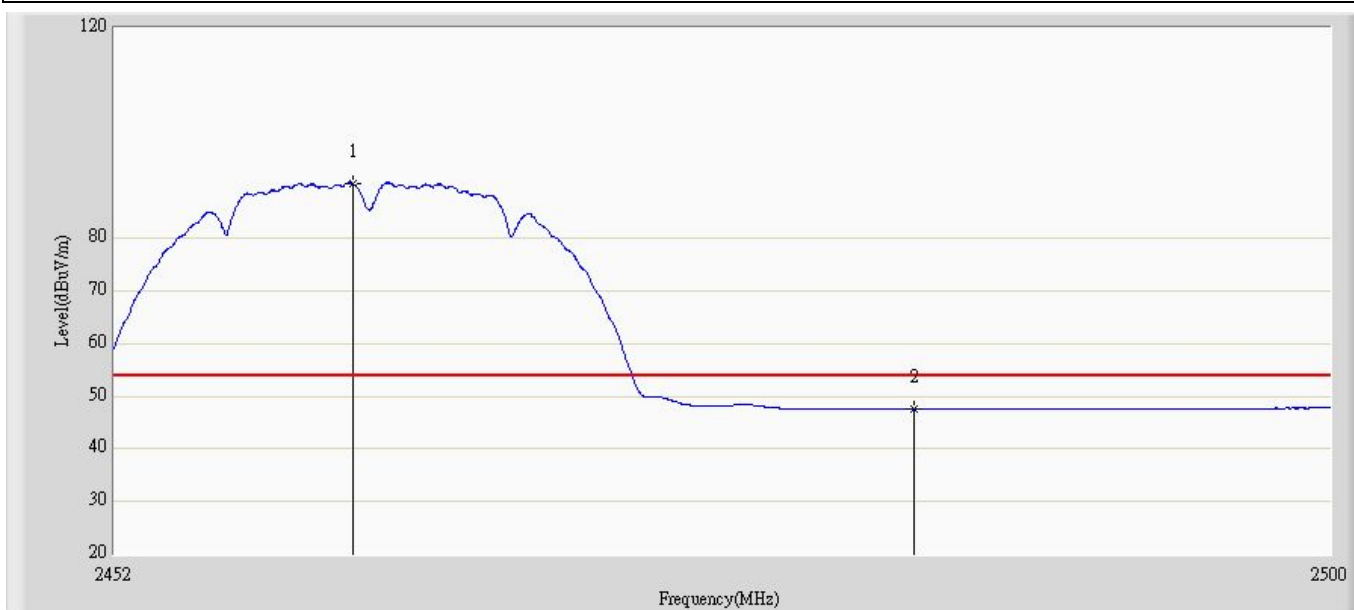


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2461.336        | 90.453                 | 59.417               | N/A             | N/A            | 31.036 | AV   |
| 2  |      |      | 2483.5          | 47.666                 | 16.732               | -6.334          | 54             | 30.934 | AV   |

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 9              |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:19 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Vertical       |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 1: Transmit at channel 2462MHz By 802.11b |                          |

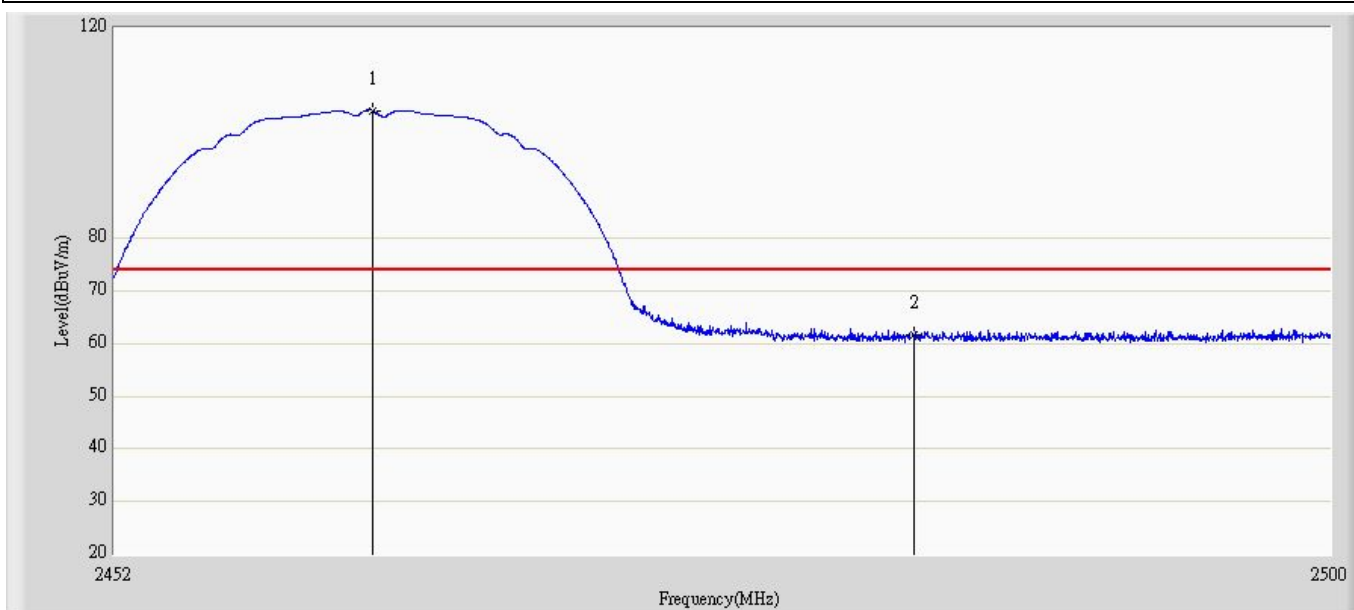


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2462.152        | 104.225                | 73.185               | N/A             | N/A            | 31.04  | PK   |
| 2  |      |      | 2483.5          | 61.672                 | 30.738               | -12.328         | 74             | 30.934 | PK   |

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 10             |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:21 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Vertical       |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 1: Transmit at channel 2462MHz By 802.11b |                          |

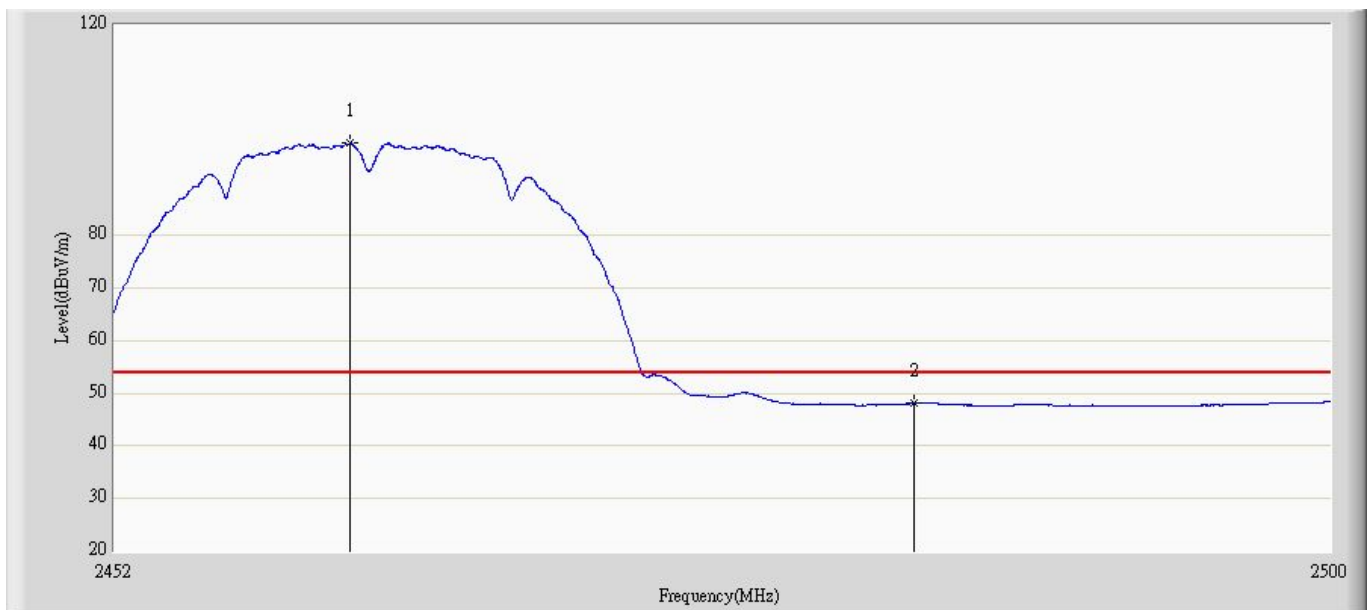


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2461.264        | 97.552                 | 66.517               | N/A             | N/A            | 31.035 | AV   |
| 2  |      |      | 2483.5          | 48.062                 | 17.128               | -5.938          | 54             | 30.934 | AV   |

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 11             |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:23 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Horizontal     |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 2: Transmit at channel 2412MHz By 802.11g |                          |

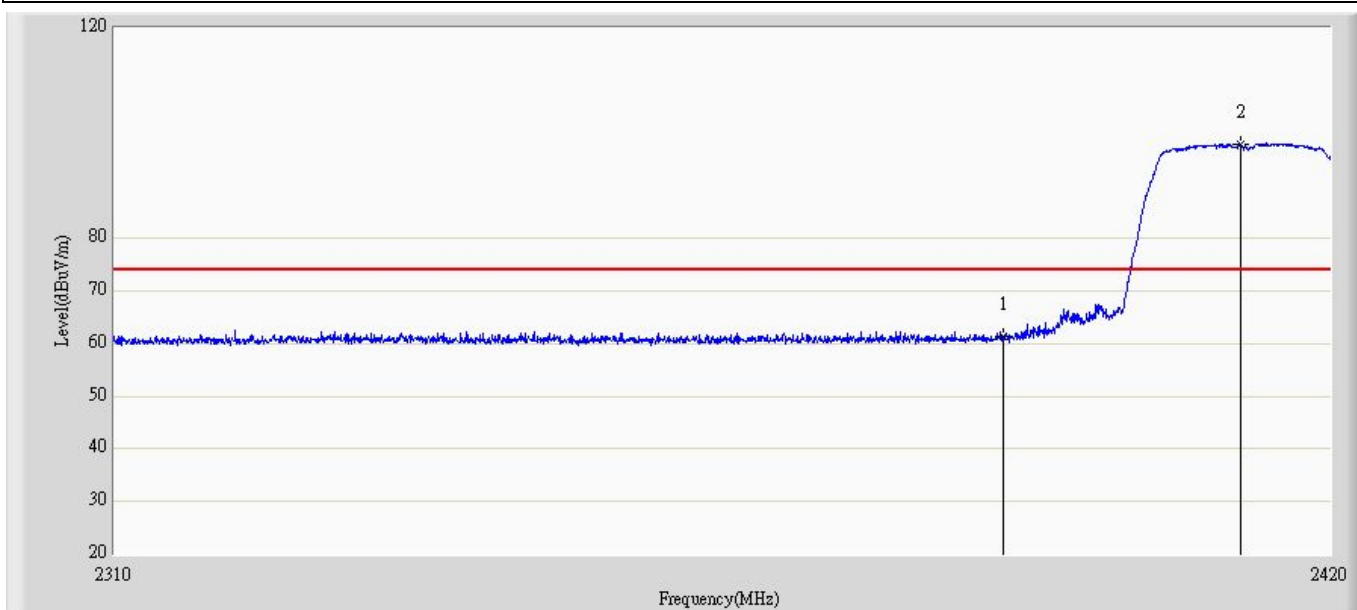


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2390            | 61.266                 | 30.354               | -12.734         | 74             | 30.911 | PK   |
| 2  | X    | *    | 2411.75         | 97.867                 | 66.992               | N/A             | N/A            | 30.875 | PK   |

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 12             |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:26 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Horizontal     |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 2: Transmit at channel 2412MHz By 802.11g |                          |

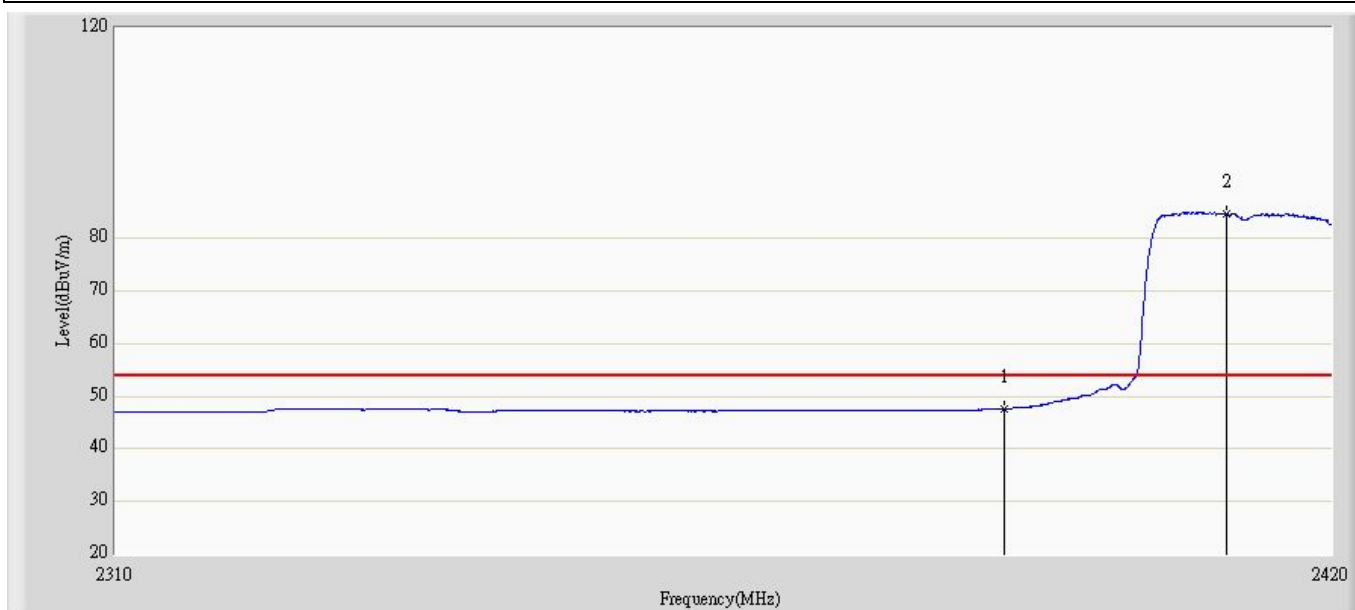

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2390            | 47.627                 | 16.715               | -6.373          | 54             | 30.911 | AV   |
| 2  | X    | *    | 2410.375        | 84.756                 | 53.878               | N/A             | N/A            | 30.878 | AV   |

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 13             |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:28 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Vertical       |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 2: Transmit at channel 2412MHz By 802.11g |                          |

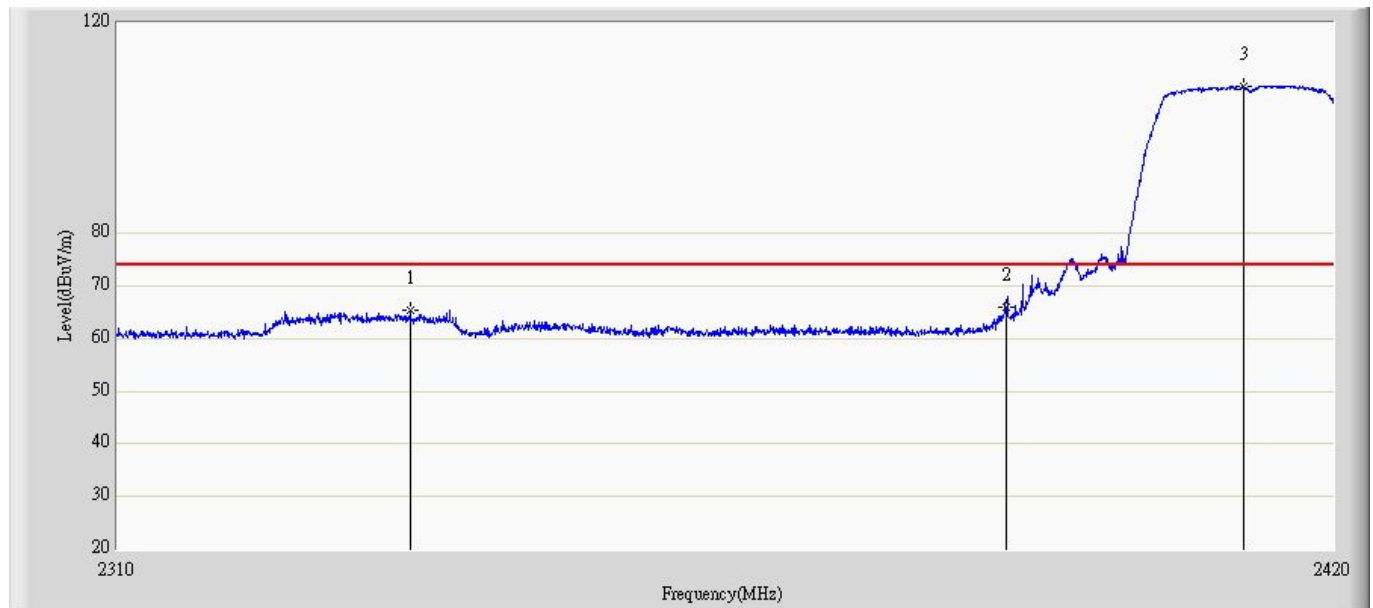


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2336.07         | 65.439                 | 34.477               | -8.561          | 74             | 30.961 | PK   |
| 2  |      |      | 2390            | 66.076                 | 35.164               | -7.924          | 74             | 30.911 | PK   |
| 3  | X    | *    | 2411.695        | 107.857                | 76.982               | N/A             | N/A            | 30.875 | PK   |

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 14             |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:32 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Vertical       |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 2: Transmit at channel 2412MHz By 802.11g |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2339.645        | 48.663                 | 17.709               | -5.337          | 54             | 30.954 | AV   |
| 2  |      |      | 2390            | 48.661                 | 17.749               | -5.339          | 54             | 30.911 | AV   |
| 3  | X    | *    | 2415.49         | 92.802                 | 61.94                | N/A             | N/A            | 30.862 | AV   |

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 15             |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:35 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Horizontal     |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 2: Transmit at channel 2462MHz By 802.11g |                          |

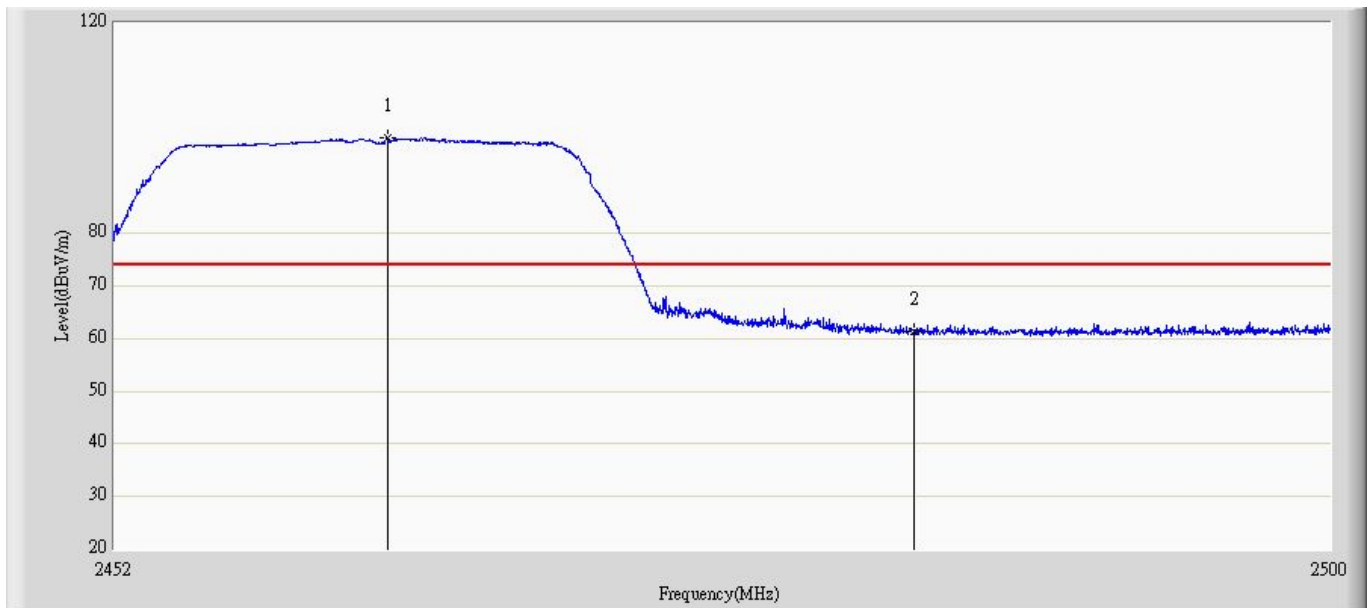

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2462.752        | 98.205                 | 67.167               | N/A             | N/A            | 31.038 | PK   |
| 2  |      |      | 2483.5          | 61.43                  | 30.496               | -12.57          | 74             | 30.934 | PK   |

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 16             |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:39 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Horizontal     |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 2: Transmit at channel 2462MHz By 802.11g |                          |

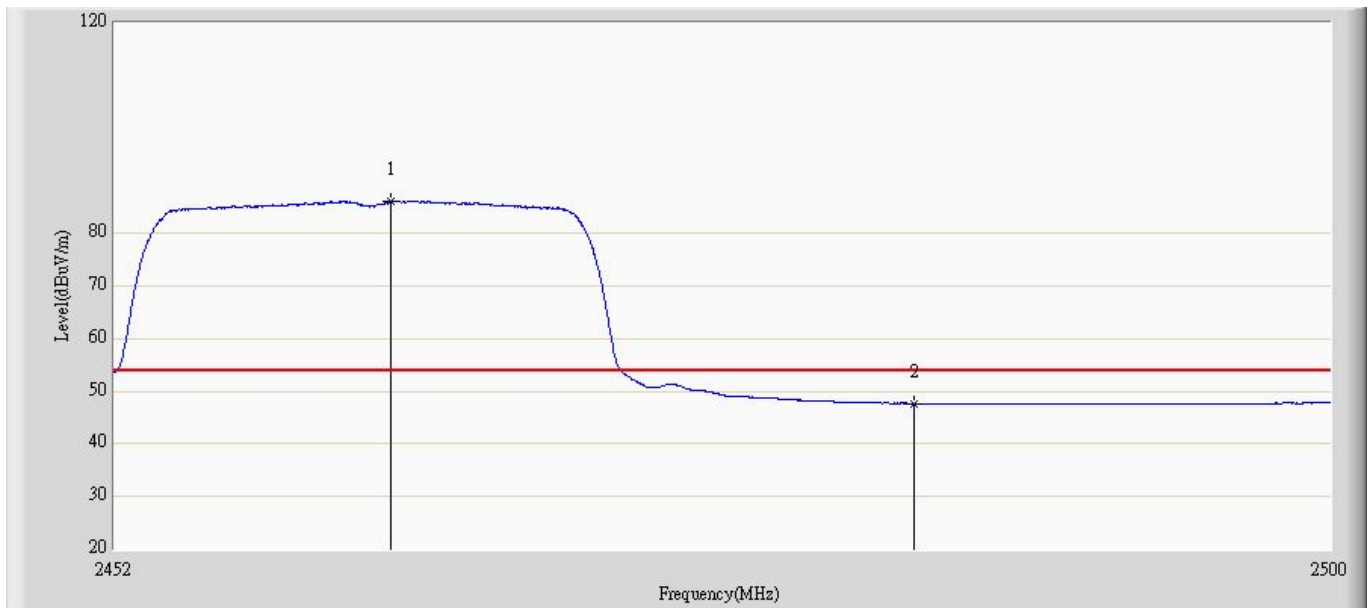


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2462.824        | 86.061                 | 55.024               | N/A             | N/A            | 31.038 | AV   |
| 2  |      |      | 2483.5          | 47.681                 | 16.747               | -6.319          | 54             | 30.934 | AV   |

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 17             |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:40 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Vertical       |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 2: Transmit at channel 2462MHz By 802.11g |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2461.84         | 107.021                | 75.981               | N/A             | N/A            | 31.04  | PK   |
| 2  |      |      | 2483.5          | 62.801                 | 31.867               | -11.199         | 74             | 30.934 | PK   |
| 3  |      |      | 2484.016        | 64.878                 | 33.947               | -9.122          | 74             | 30.931 | PK   |

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Profile: 104S031R                                    | Page No.: 18             |
| Engineer: Jame                                       |                          |
| Site: AC5                                            | Time: 2010/04/16 - 16:42 |
| Limit: FCC_Part15.209_RE(3m)                         | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                        | Polarity: Vertical       |
| EUT: Home Gateway                                    | Power: AC 120V/60Hz      |
| Note: Mode 2: Transmit at channel 2462MHz By 802.11g |                          |

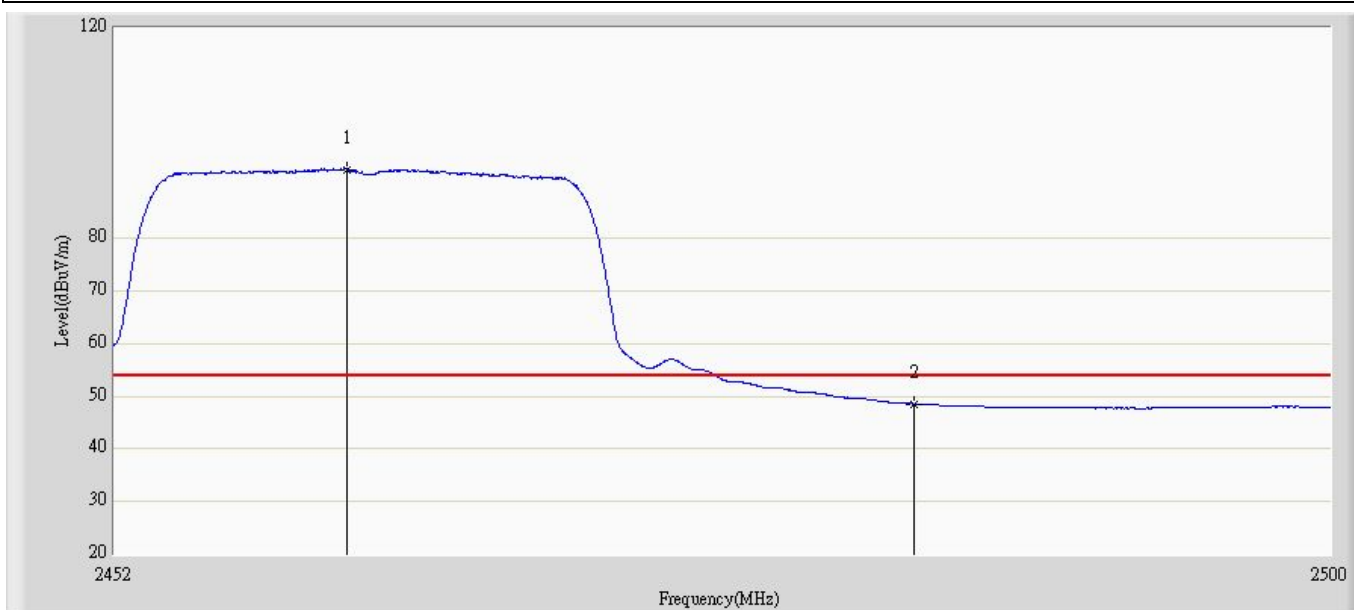


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2461.12         | 93.097                 | 62.063               | N/A             | N/A            | 31.034 | AV   |
| 2  |      |      | 2483.5          | 48.531                 | 17.597               | -5.469          | 54             | 30.934 | AV   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 19             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 16:43 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Horizontal     |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 3: Transmit at channel 2412MHz By 802.11n(20MHz) |                          |

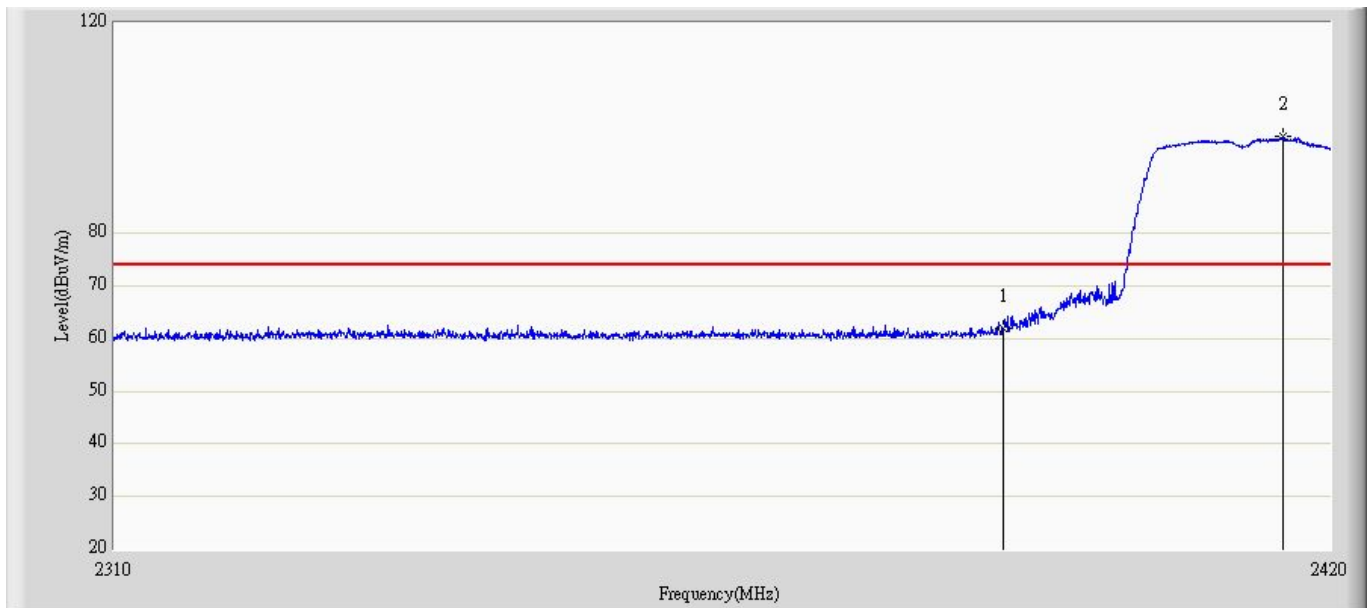


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2390            | 62.07                  | 31.158               | -11.93          | 74             | 30.911 | PK   |
| 2  | X    | *    | 2415.6          | 98.441                 | 67.579               | N/A             | N/A            | 30.862 | PK   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 20             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 16:47 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Horizontal     |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 3: Transmit at channel 2412MHz By 802.11n(20MHz) |                          |

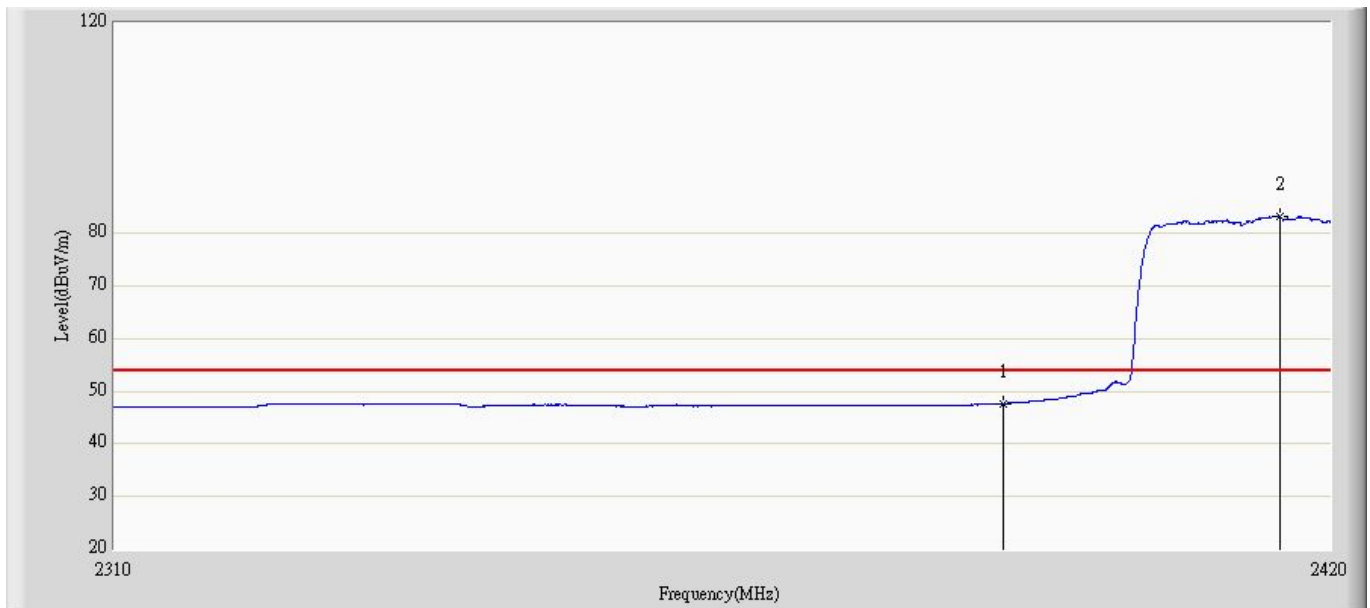


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2390            | 47.716                 | 16.804               | -6.284          | 54             | 30.911 | AV   |
| 2  | X    | *    | 2415.38         | 83.093                 | 52.23                | N/A             | N/A            | 30.862 | AV   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 21             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 16:48 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Vertical       |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 3: Transmit at channel 2412MHz By 802.11n(20MHz) |                          |

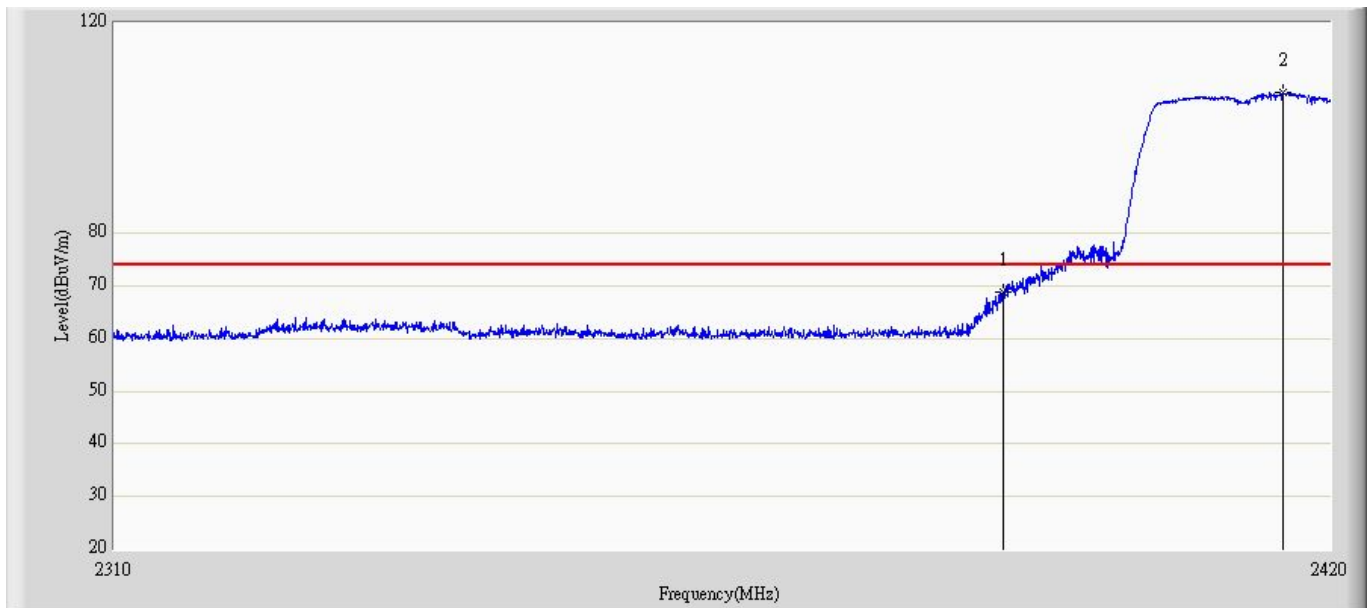


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2390            | 68.973                 | 38.061               | -5.027          | 74             | 30.911 | PK   |
| 2  | X    | *    | 2415.71         | 106.898                | 76.037               | N/A             | N/A            | 30.861 | PK   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 22             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 16:49 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Vertical       |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 3: Transmit at channel 2412MHz By 802.11n(20MHz) |                          |

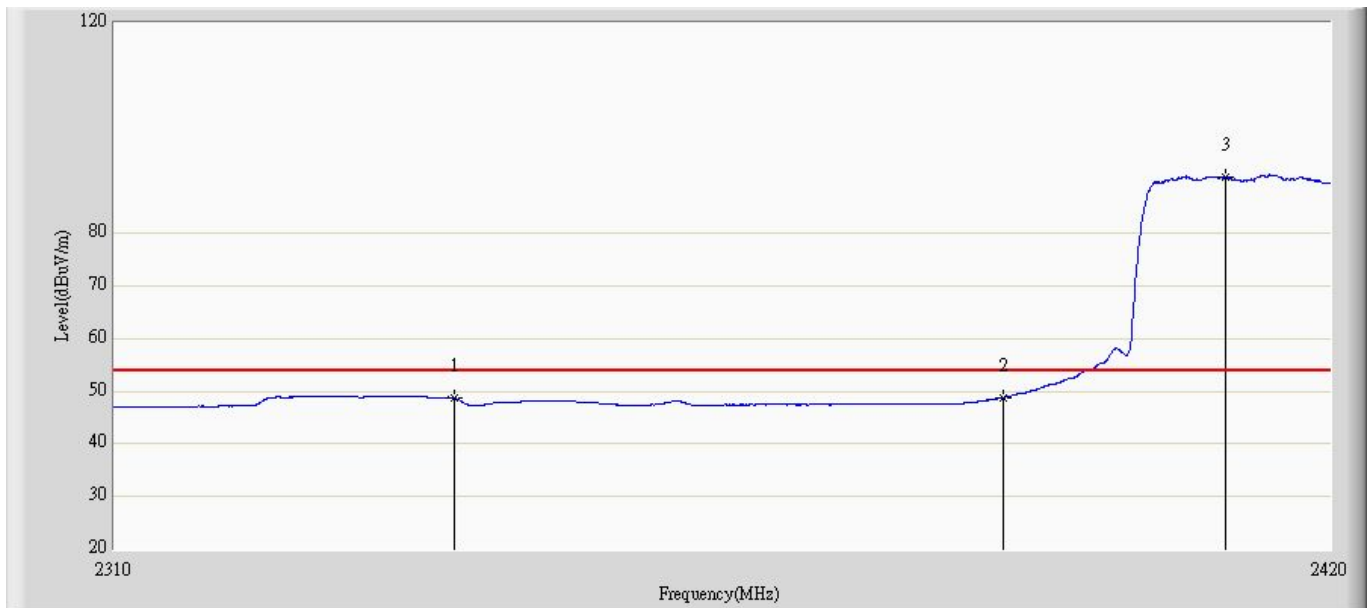


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2340.305        | 48.714                 | 17.761               | -5.286          | 54             | 30.953 | AV   |
| 2  |      |      | 2390            | 48.848                 | 17.936               | -5.152          | 54             | 30.911 | AV   |
| 3  | X    | *    | 2410.375        | 90.785                 | 59.907               | N/A             | N/A            | 30.878 | AV   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 23             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 16:51 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Horizontal     |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 3: Transmit at channel 2462MHz By 802.11n(20MHz) |                          |

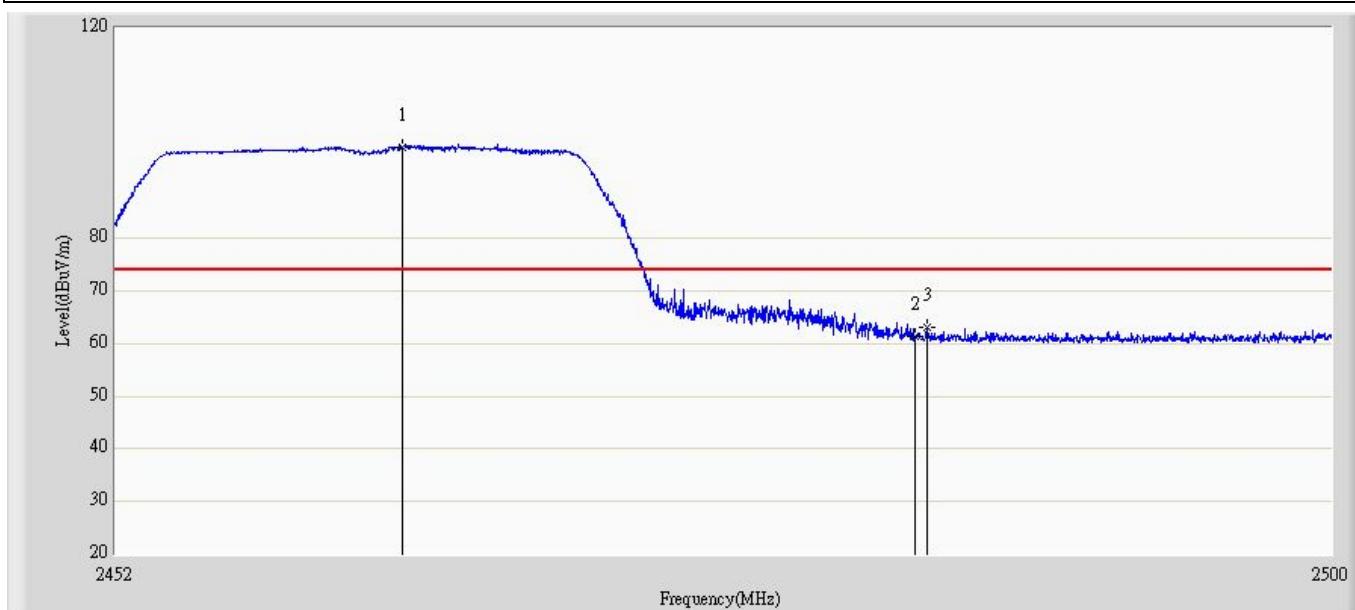


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2463.28         | 97.223                 | 66.188               | N/A             | N/A            | 31.035 | PK   |
| 2  |      |      | 2483.5          | 61.245                 | 30.311               | -12.755         | 74             | 30.934 | PK   |
| 3  |      |      | 2483.944        | 63.004                 | 32.073               | -10.996         | 74             | 30.931 | PK   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 24             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 16:53 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Horizontal     |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 3: Transmit at channel 2462MHz By 802.11n(20MHz) |                          |

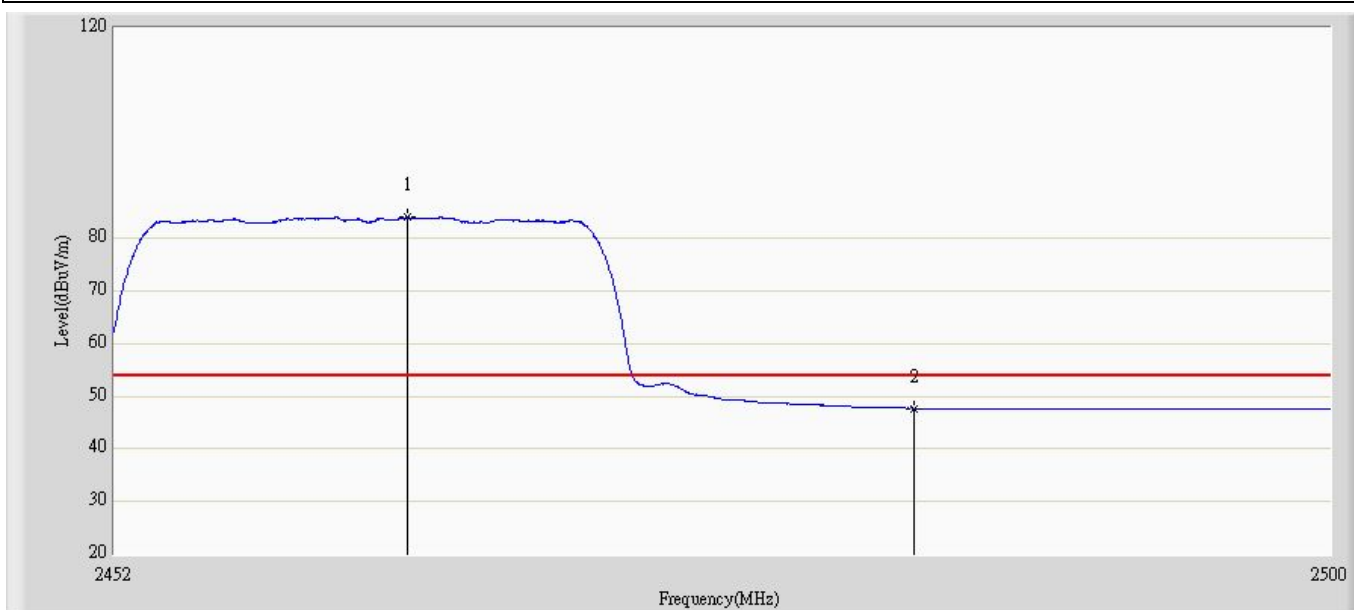


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2463.472        | 84.069                 | 53.035               | N/A             | N/A            | 31.034 | AV   |
| 2  |      |      | 2483.5          | 47.701                 | 16.767               | -6.299          | 54             | 30.934 | AV   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 25             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 16:54 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Vertical       |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 3: Transmit at channel 2462MHz By 802.11n(20MHz) |                          |

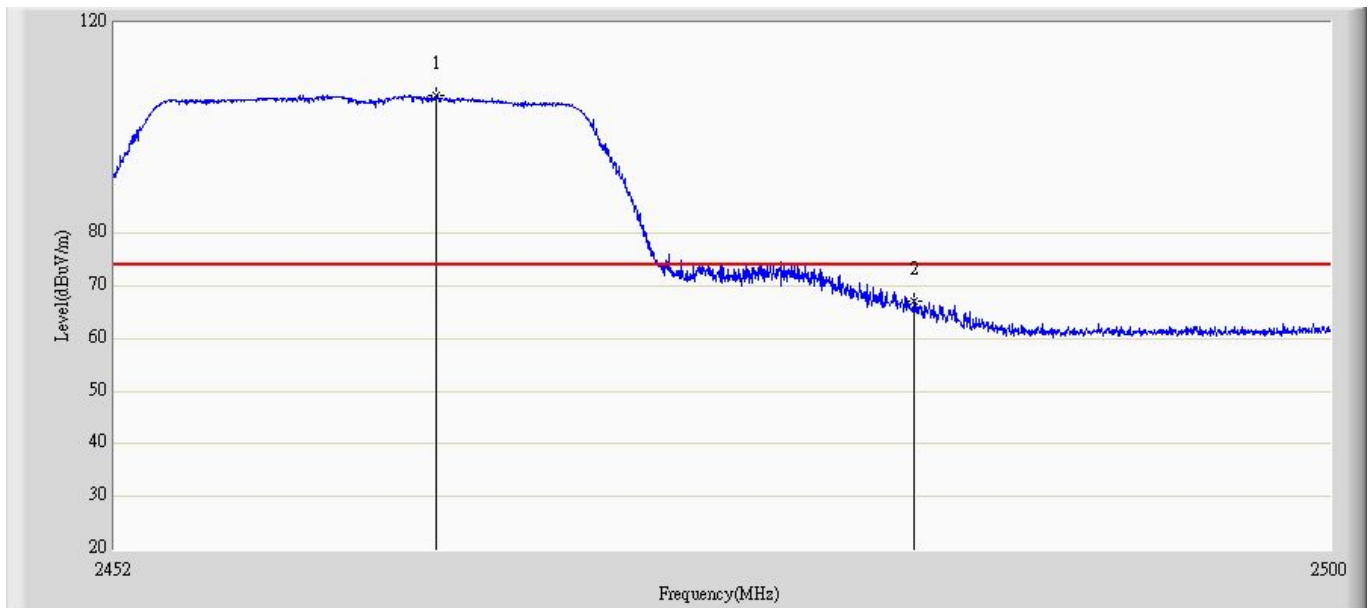


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2464.648        | 106.327                | 75.298               | N/A             | N/A            | 31.029 | PK   |
| 2  |      |      | 2483.5          | 66.983                 | 36.049               | -7.017          | 74             | 30.934 | PK   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 26             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 16:57 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Vertical       |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 3: Transmit at channel 2462MHz By 802.11n(20MHz) |                          |

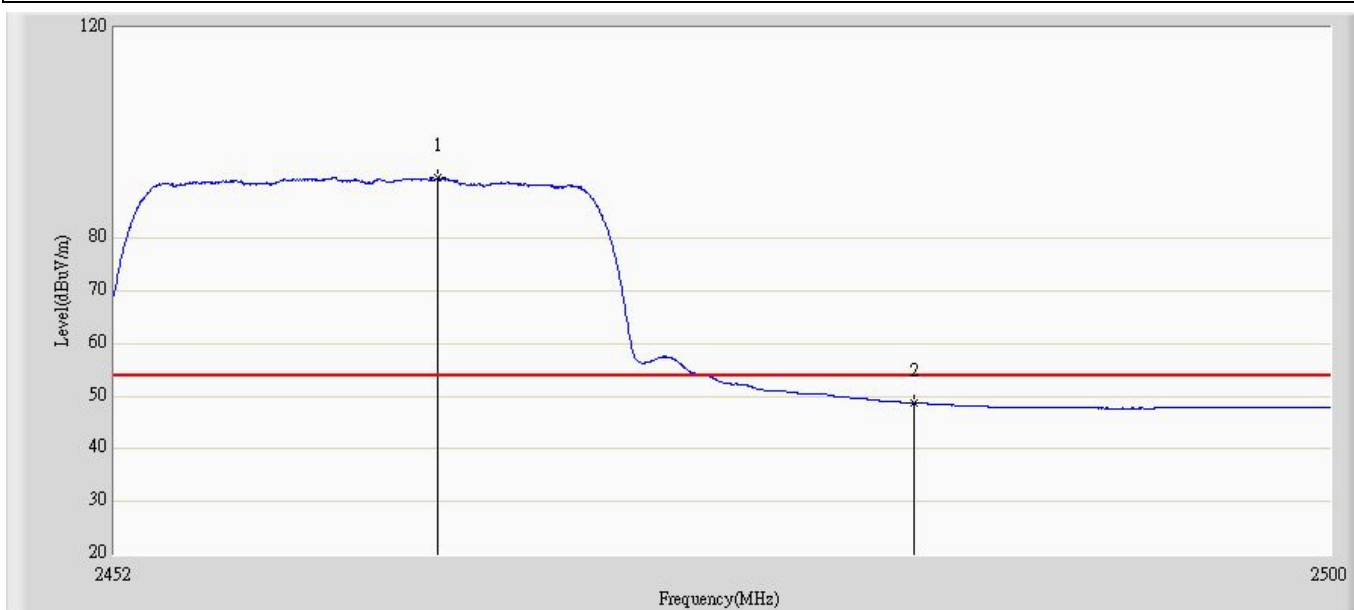


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2464.672        | 91.439                 | 60.41                | N/A             | N/A            | 31.029 | AV   |
| 2  |      |      | 2483.5          | 48.746                 | 17.812               | -5.254          | 54             | 30.934 | AV   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 27             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 16:59 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Horizontal     |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 4: Transmit at channel 2422MHz By 802.11n(40MHz) |                          |

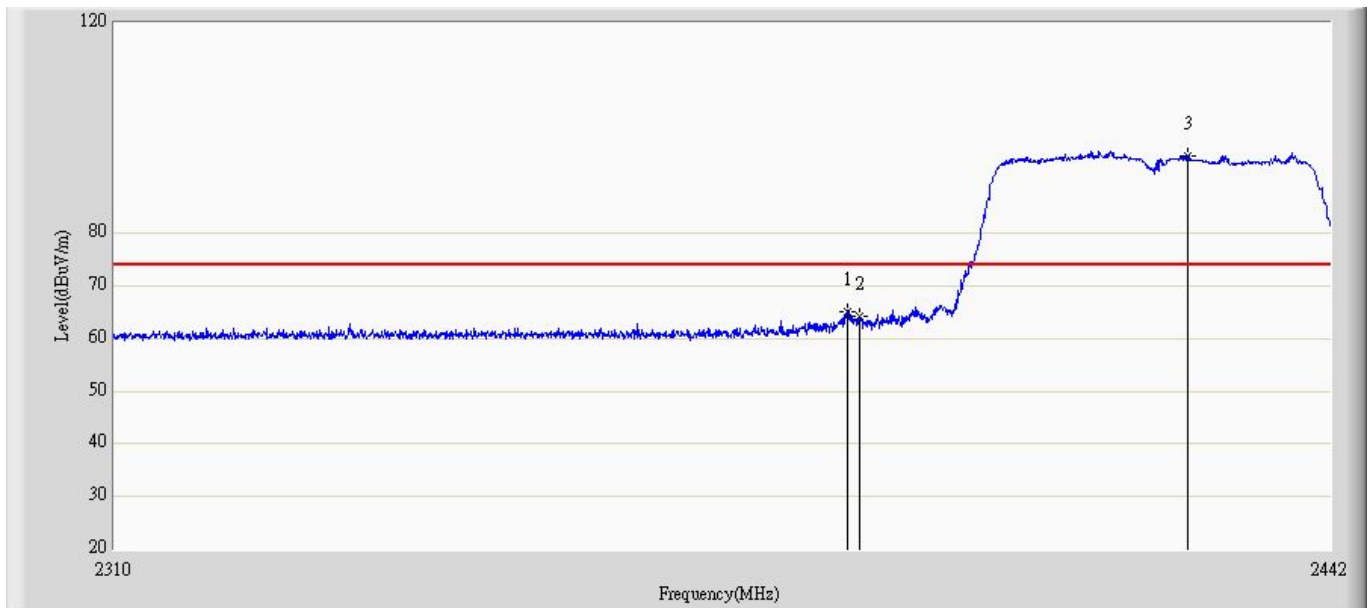


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2388.672        | 65.03                  | 34.12                | -8.97           | 74             | 30.91  | PK   |
| 2  |      |      | 2390            | 64.132                 | 33.22                | -9.868          | 74             | 30.911 | PK   |
| 3  | X    | *    | 2426.16         | 94.796                 | 63.969               | N/A             | N/A            | 30.827 | PK   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 28             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 17:02 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Horizontal     |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 4: Transmit at channel 2422MHz By 802.11n(40MHz) |                          |

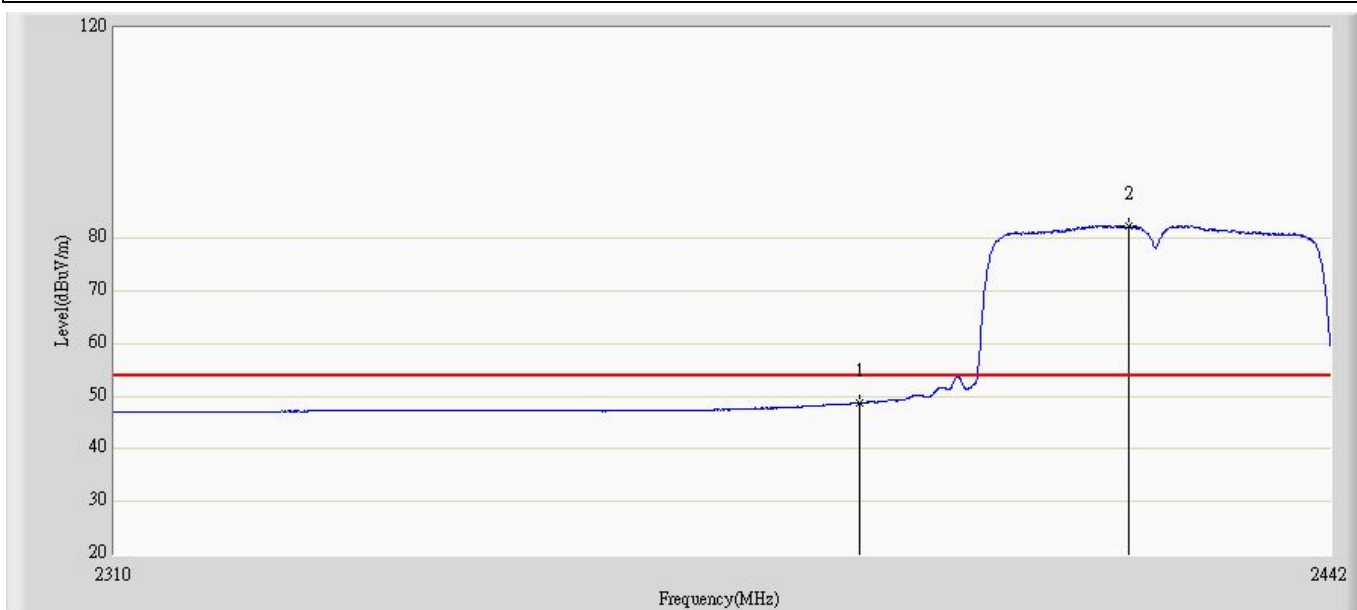


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2390            | 48.8                   | 17.888               | -5.2            | 54             | 30.911 | AV   |
| 2  | X    | *    | 2419.692        | 82.384                 | 51.536               | N/A             | N/A            | 30.848 | AV   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 29             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 17:03 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Vertical       |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 4: Transmit at channel 2422MHz By 802.11n(40MHz) |                          |

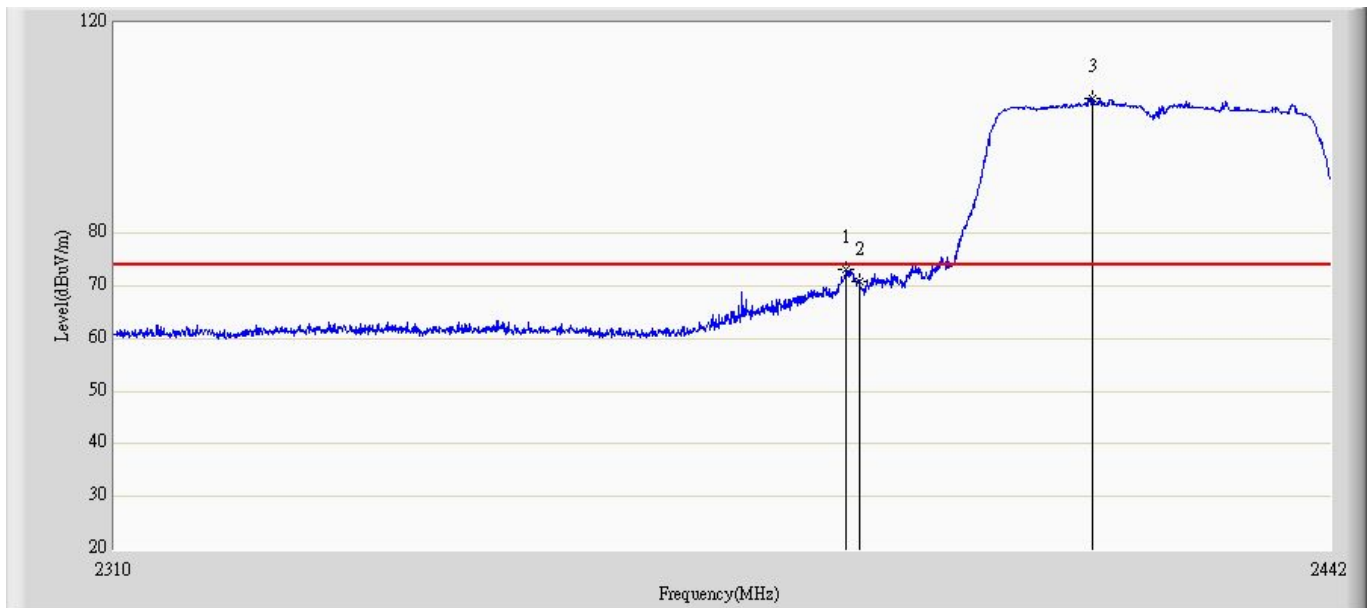


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2388.606        | 73.023                 | 42.113               | -0.977          | 74             | 30.91  | PK   |
| 2  |      |      | 2390            | 70.868                 | 39.956               | -3.132          | 74             | 30.911 | PK   |
| 3  | X    | *    | 2415.666        | 105.578                | 74.716               | N/A             | N/A            | 30.861 | PK   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 30             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 17:08 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Vertical       |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 4: Transmit at channel 2422MHz By 802.11n(40MHz) |                          |

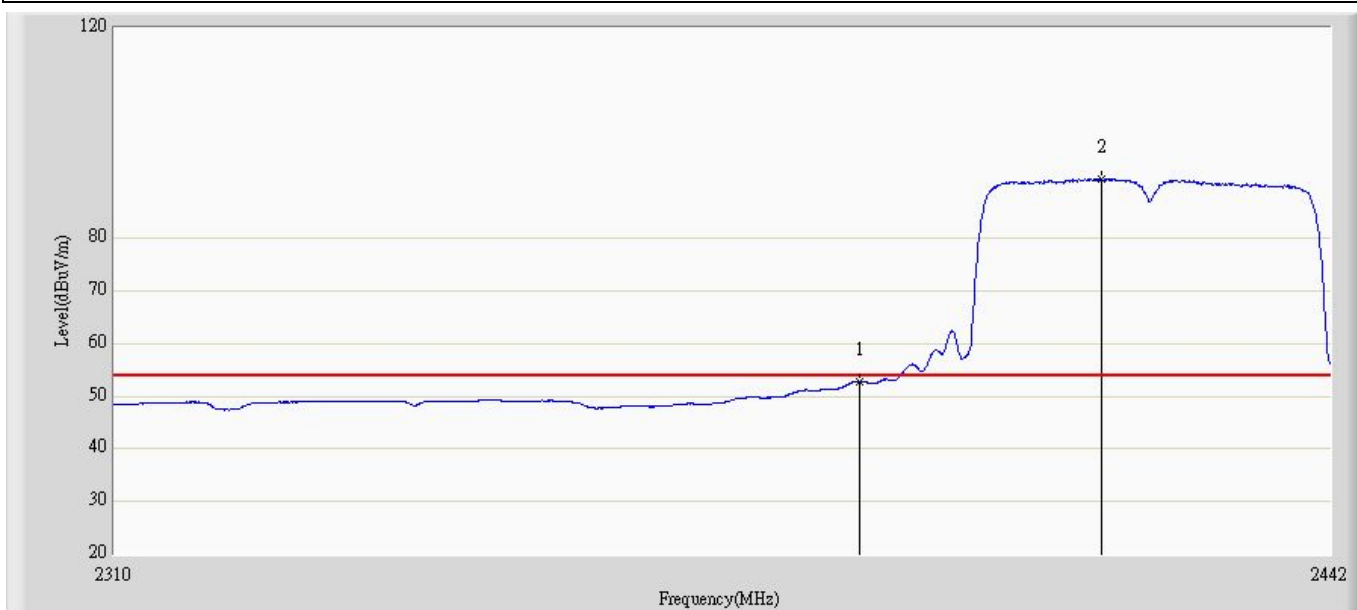

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  |      |      | 2390            | 52.746                 | 21.834               | -1.254          | 54             | 30.911 | AV   |
| 2  | X    | *    | 2416.656        | 91.19                  | 60.332               | N/A             | N/A            | 30.859 | AV   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 31             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 17:10 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Horizontal     |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 4: Transmit at channel 2452MHz By 802.11n(40MHz) |                          |

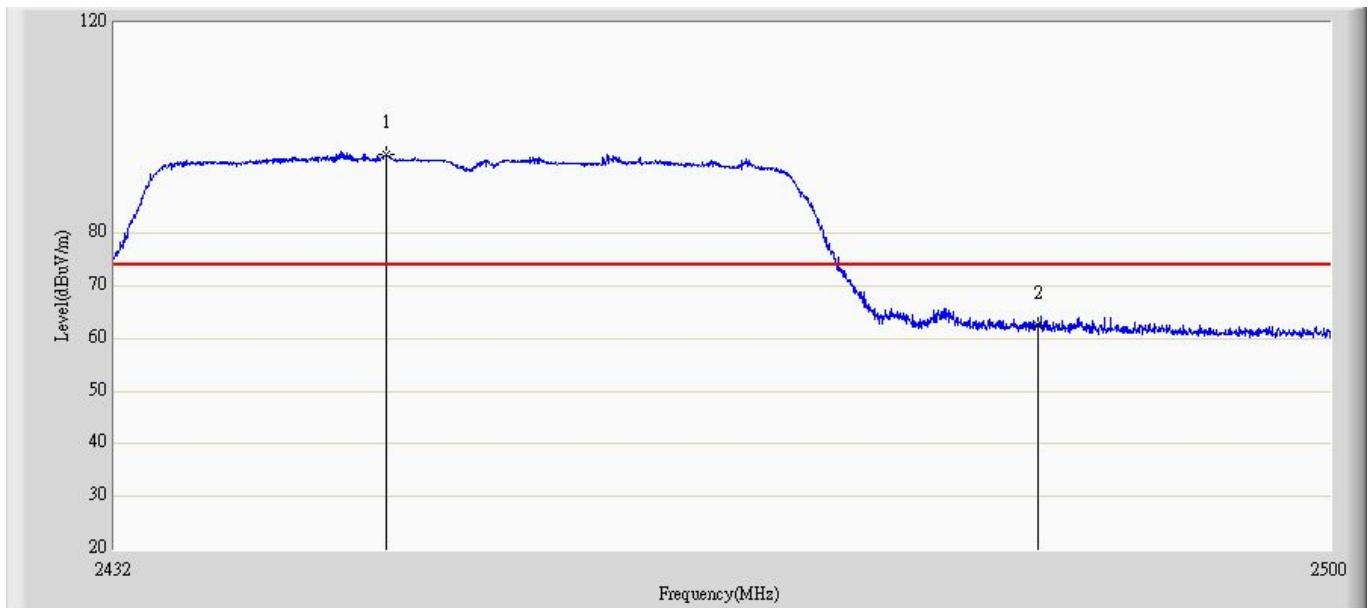

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2447.028        | 95.119                 | 64.192               | N/A             | N/A            | 30.927 | PK   |
| 2  |      |      | 2483.5          | 62.601                 | 31.667               | -11.399         | 74             | 30.934 | PK   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 32             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 17:12 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Horizontal     |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 4: Transmit at channel 2452MHz By 802.11n(40MHz) |                          |



| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2450.122        | 81.545                 | 50.595               | N/A             | N/A            | 30.95  | AV   |
| 2  |      |      | 2483.5          | 49.081                 | 18.147               | -4.919          | 54             | 30.934 | AV   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 33             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 17:13 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Vertical       |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 4: Transmit at channel 2452MHz By 802.11n(40MHz) |                          |



| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2446.994        | 104.574                | 73.648               | N/A             | N/A            | 30.926 | PK   |
| 2  |      |      | 2483.5          | 66.003                 | 35.069               | -7.997          | 74             | 30.934 | PK   |
| 3  |      |      | 2485.346        | 68.359                 | 37.437               | -5.641          | 74             | 30.921 | PK   |

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Profile: 104S031R                                           | Page No.: 34             |
| Engineer: Jame                                              |                          |
| Site: AC5                                                   | Time: 2010/04/16 - 17:15 |
| Limit: FCC_Part15.209_RE(3m)                                | Margin: 0                |
| Probe: BBHA9120D_499(1-18GHz)                               | Polarity: Vertical       |
| EUT: Home Gateway                                           | Power: AC 120V/60Hz      |
| Note: Mode 4: Transmit at channel 2452MHz By 802.11n(40MHz) |                          |



| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|--------|------|
| 1  | X    | *    | 2449.612        | 90.788                 | 59.842               | N/A             | N/A            | 30.946 | AV   |
| 2  |      |      | 2483.5          | 52.264                 | 21.33                | -1.736          | 54             | 30.934 | AV   |

## 7. Operation Frequency Range of 20dB Bandwidth


### 7.1. Test Equipment

Operation Frequency Range of 20dB Bandwidth / AC-6

| Instrument                 | Manufacturer | Type No. | Serial No. | Cal. Date  |
|----------------------------|--------------|----------|------------|------------|
| Spectrum Analyzer          | Agilent      | N9020A   | MY49100159 | 2009/05/06 |
| Temperature/Humidity Meter | zhicheng     | ZC1-2    | AC6-TH     | 2010/01/14 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 7.2. Test Setup

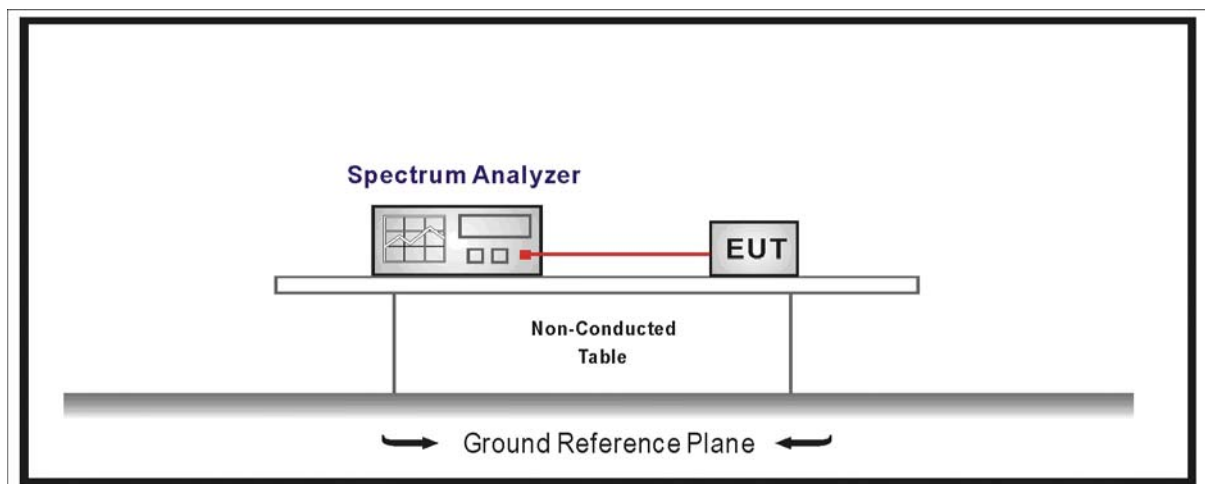

### 7.3. Limit

20 dB bandwidth of the emission is contained within the operation frequency band.

### 7.4. Test Procedure

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Span greater than RBW.


### 7.5. Uncertainty

The measurement uncertainty is defined as  $\pm 1$  kHz


## 7.6. Test Result

|           |   |                                             |
|-----------|---|---------------------------------------------|
| Product   | : | Home Gateway                                |
| Test Item | : | Operation Frequency Range of 20dB Bandwidth |
| Test Mode | : | Mode 1: Transmit by 802.11b                 |

Channel 01 (2412MHz)

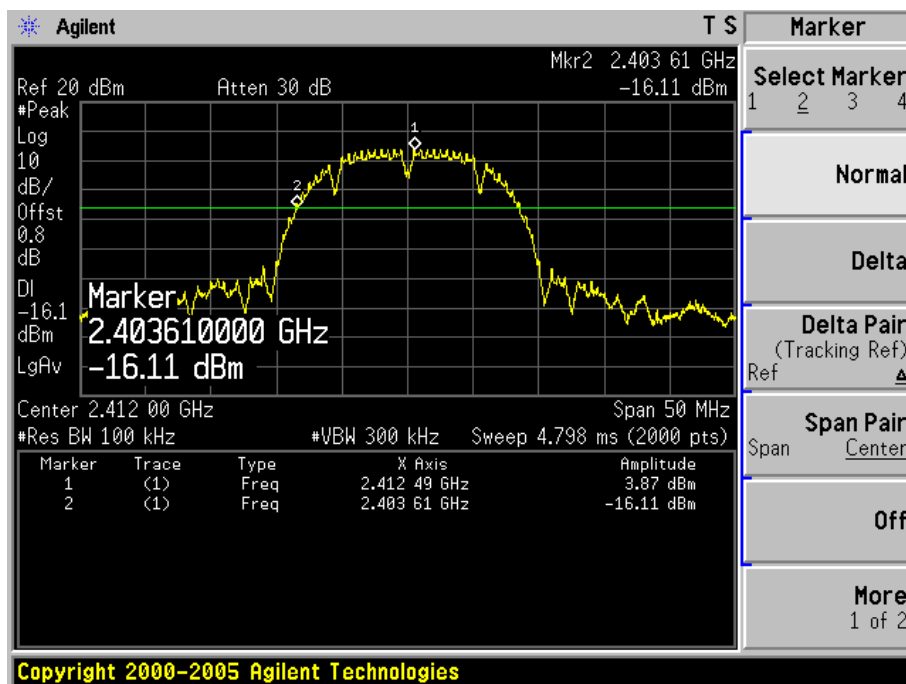


Channel 11 (2462MHz)

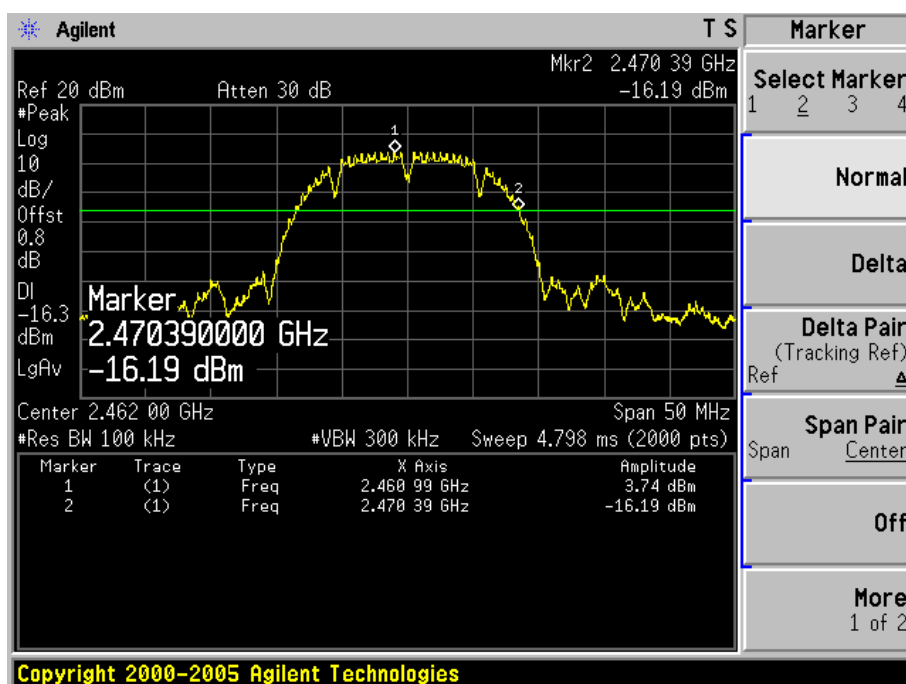


|           |   |                                             |
|-----------|---|---------------------------------------------|
| Product   | : | Home Gateway                                |
| Test Item | : | Operation Frequency Range of 20dB Bandwidth |
| Test Mode | : | Mode 2: Transmit by 802.11g                 |

## Channel 01 (2412MHz)

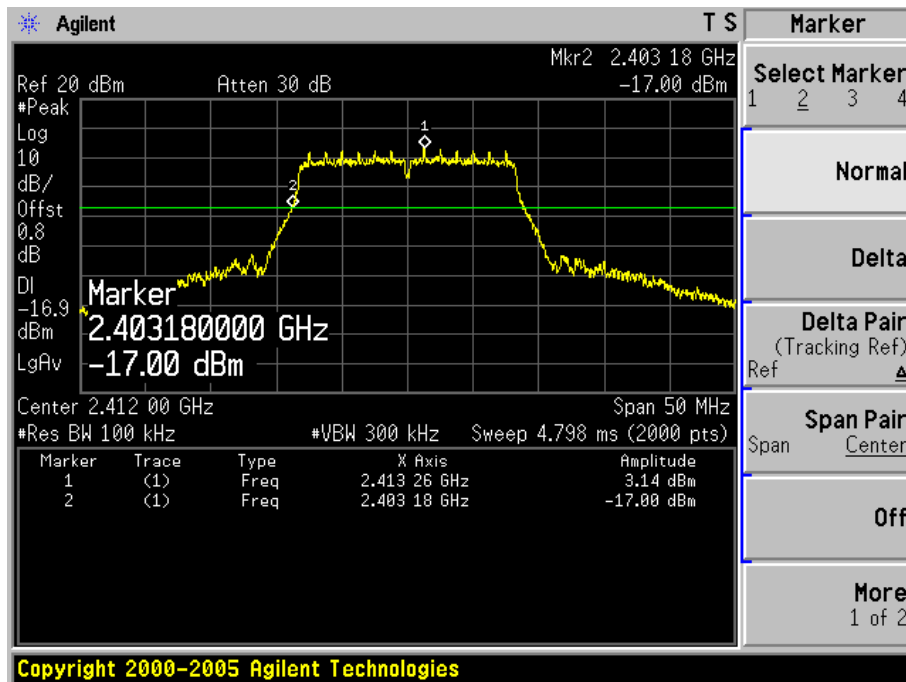


## Channel 11 (2462MHz)

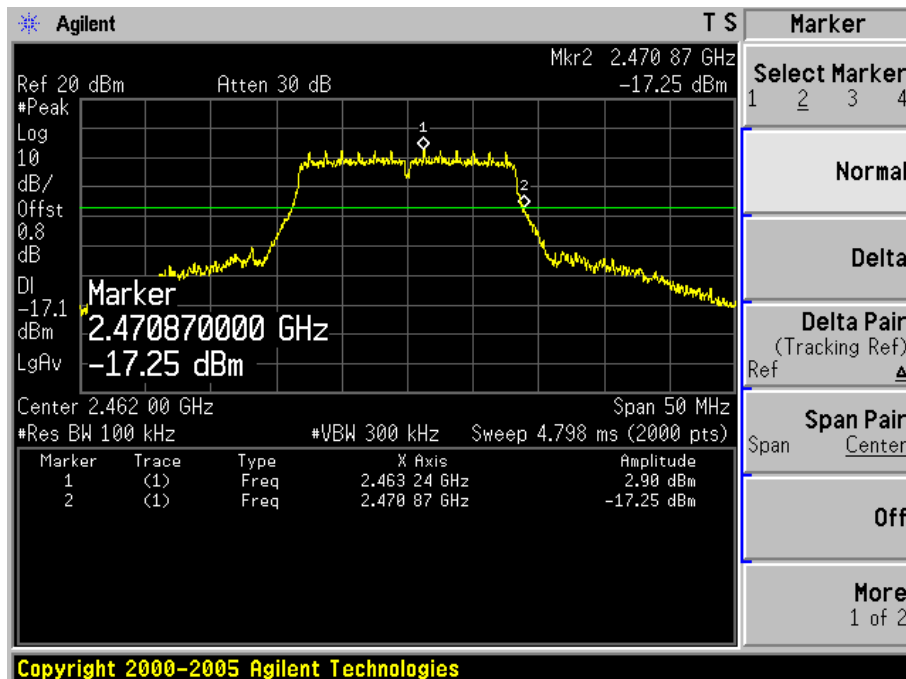


|           |   |                                             |
|-----------|---|---------------------------------------------|
| Product   | : | Home Gateway                                |
| Test Item | : | Operation Frequency Range of 20dB Bandwidth |
| Test Mode | : | Mode 3: Transmit by 802.11n (20MHz)         |

### Channel 01 (2412MHz)

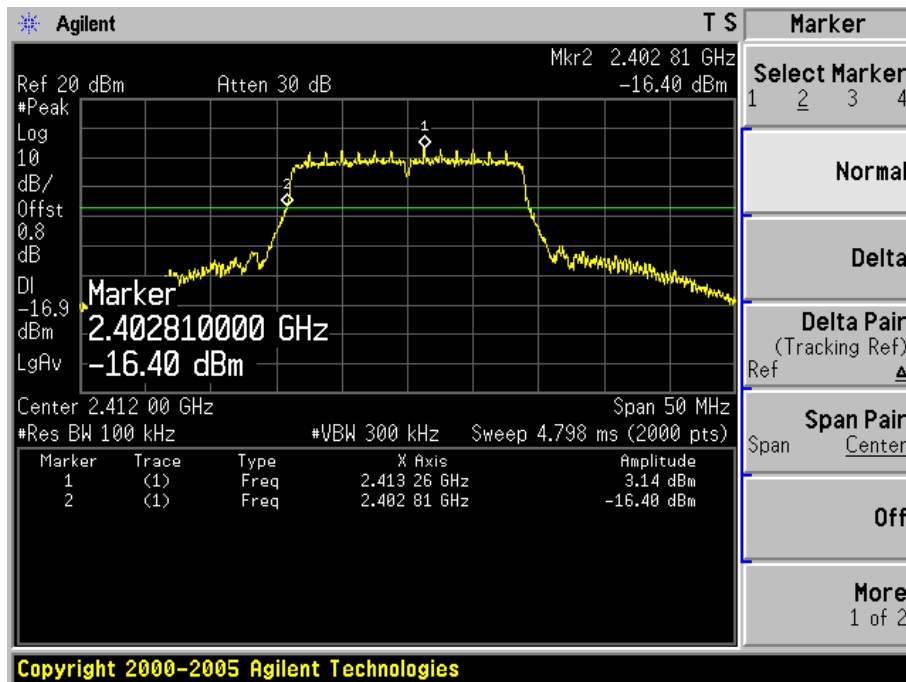


### Channel 11 (2462MHz)

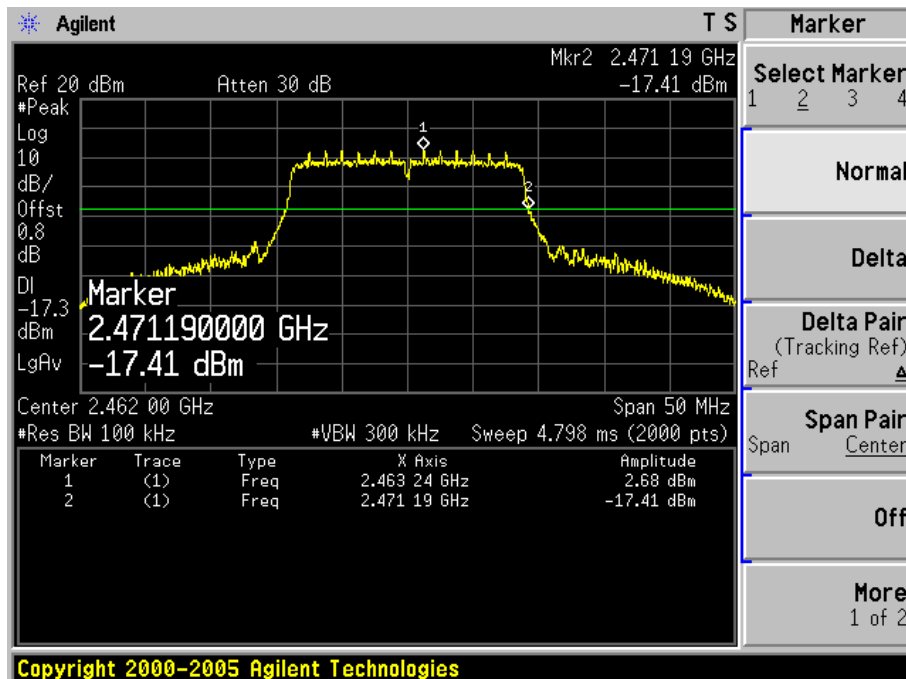


|           |   |                                             |
|-----------|---|---------------------------------------------|
| Product   | : | Home Gateway                                |
| Test Item | : | Operation Frequency Range of 20dB Bandwidth |
| Test Mode | : | Mode 4: Transmit by 802.11n (40MHz)         |

Channel 03 (2422MHz)

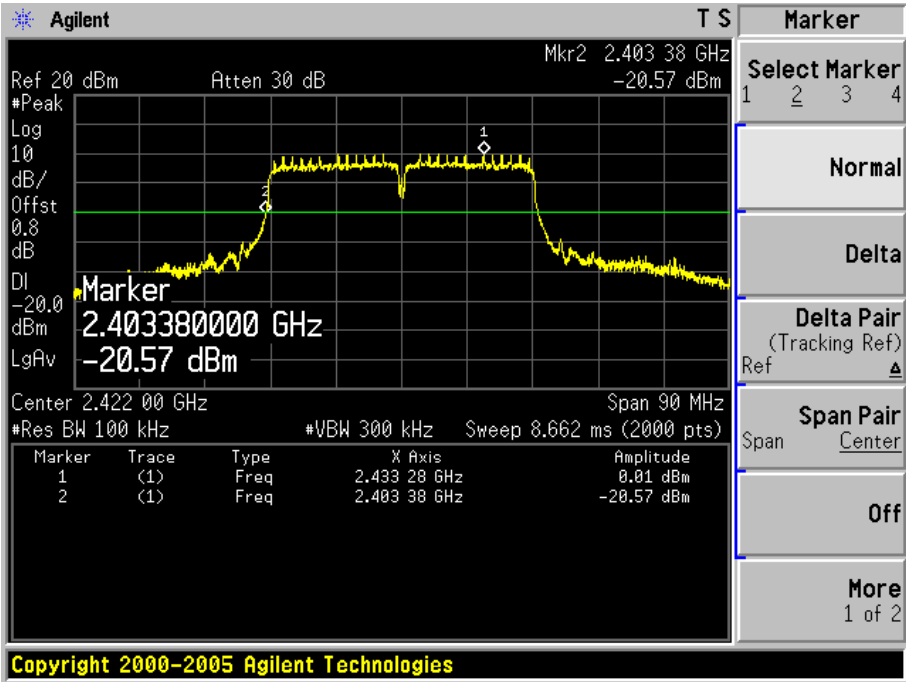

Channel 09 (2452MHz)

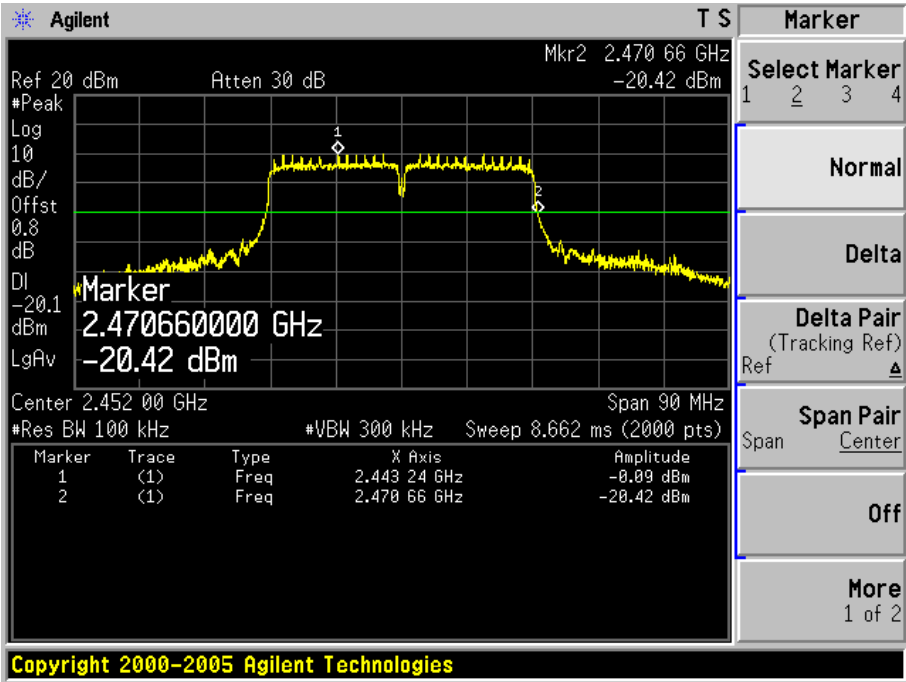

## 8. Occupied Bandwidth


### 8.1. Test Equipment

Occupied Bandwidth / AC-6

| Instrument                 | Manufacturer | Type No. | Serial No. | Cal. Date  |
|----------------------------|--------------|----------|------------|------------|
| Spectrum Analyzer          | Agilent      | N9020A   | MY49100159 | 2009/05/06 |
| Temperature/Humidity Meter | zhicheng     | ZC1-2    | AC6-TH     | 2010/01/14 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 8.2. Test Setup

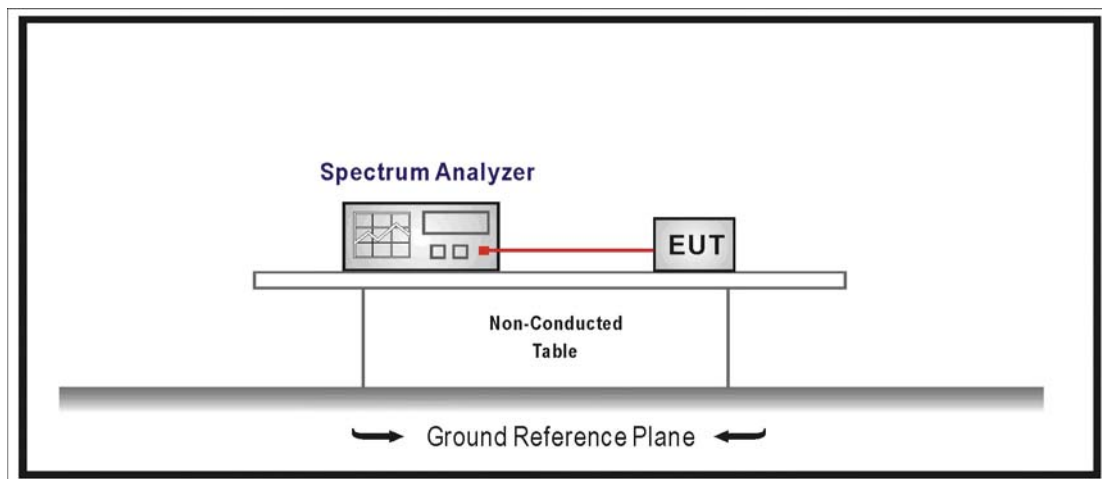

### 8.3. Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.

### 8.4. Test Procedure

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Span greater than RBW.

### 8.5. Uncertainty


The measurement uncertainty is defined as  $\pm 1$  kHz

## 8.6. Test Result


|           |   |                             |
|-----------|---|-----------------------------|
| Product   | : | Home Gateway                |
| Test Item | : | 6dB Occupied Bandwidth      |
| Test Mode | : | Mode 1: Transmit by 802.11b |

| Channel No. | Frequency (MHz) | Occupied Bandwidth (kHz) | Limit (kHz) | Result |
|-------------|-----------------|--------------------------|-------------|--------|
| 01          | 2412            | 12110                    | 500         | Pass   |
| 06          | 2437            | 12010                    | 500         | Pass   |
| 11          | 2462            | 12110                    | 500         | Pass   |


Channel 01 (2412MHz)

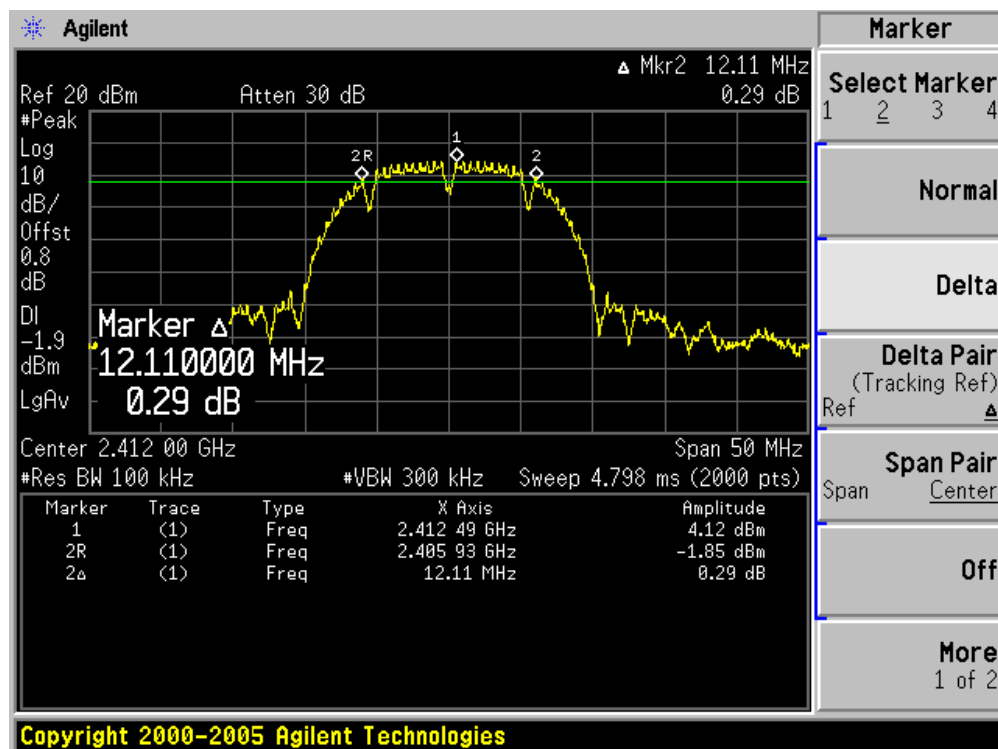

### Channel 06 (2437MHz)

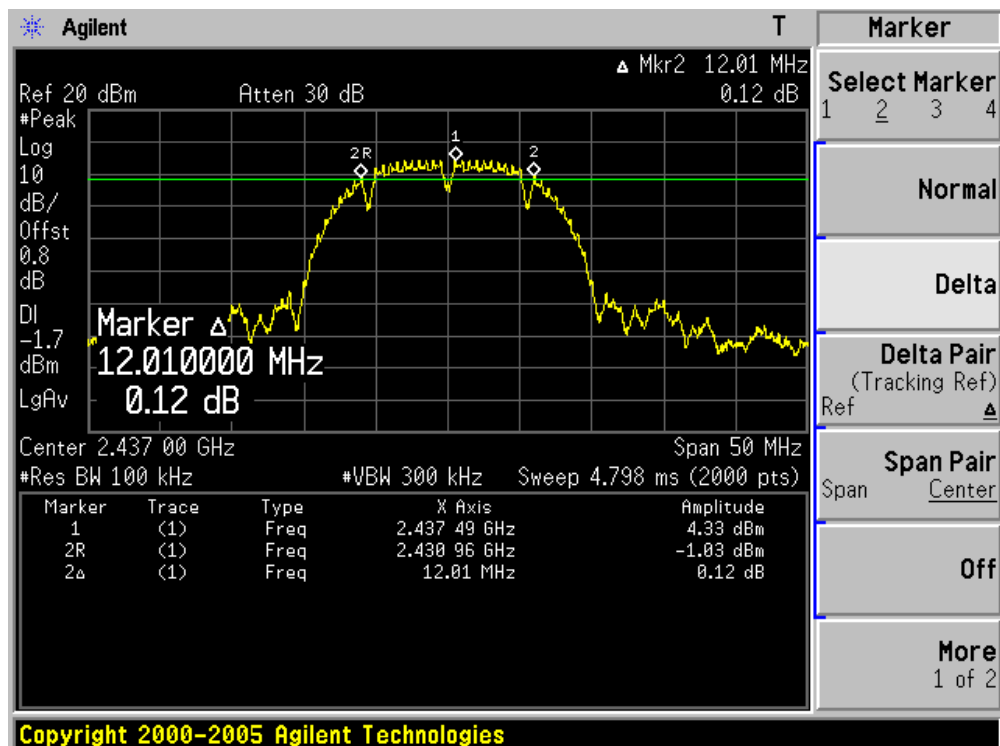


### Channel 11 (2462MHz)

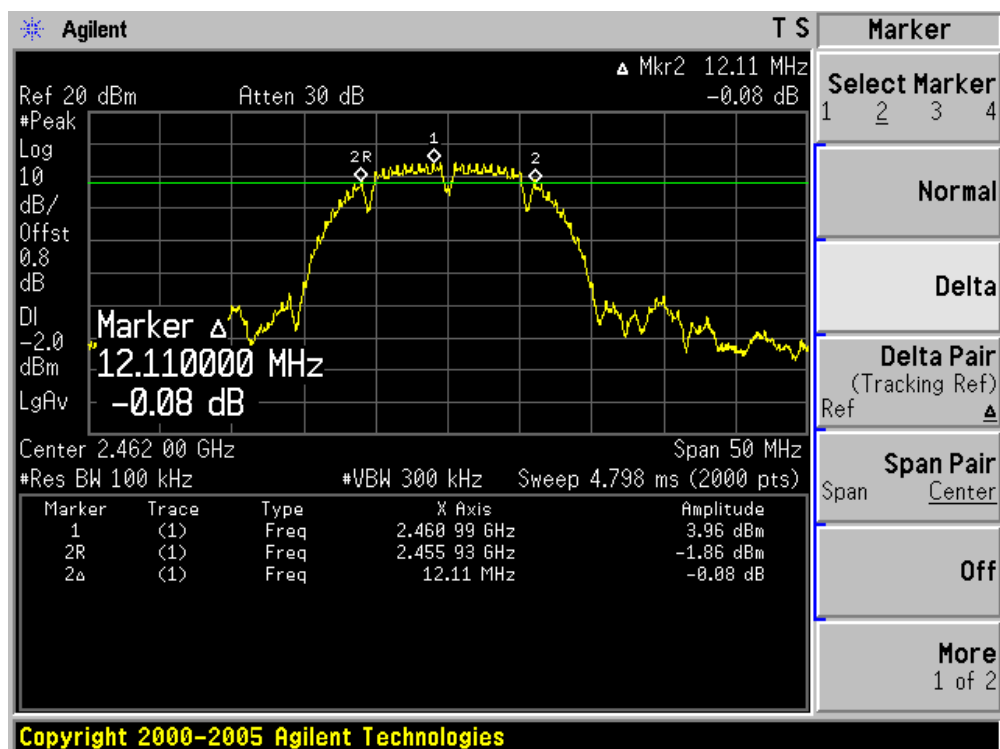


|           |   |                             |
|-----------|---|-----------------------------|
| Product   | : | Home Gateway                |
| Test Item | : | 6dB Occupied Bandwidth      |
| Test Mode | : | Mode 2: Transmit by 802.11g |

| Channel No. | Frequency (MHz) | Occupied Bandwidth (kHz) | Limit (kHz) | Result |
|-------------|-----------------|--------------------------|-------------|--------|
| 01          | 2412            | 16330                    | 500         | Pass   |
| 06          | 2437            | 16110                    | 500         | Pass   |
| 11          | 2462            | 16260                    | 500         | Pass   |


Channel 01 (2412MHz)

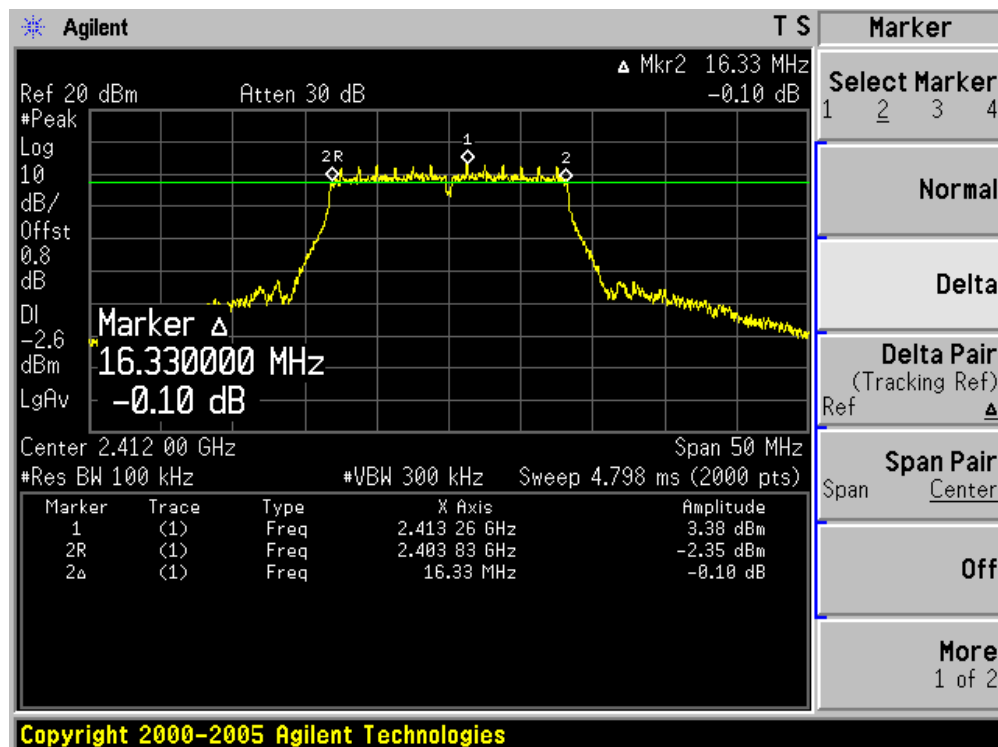

Channel 06 (2437MHz)

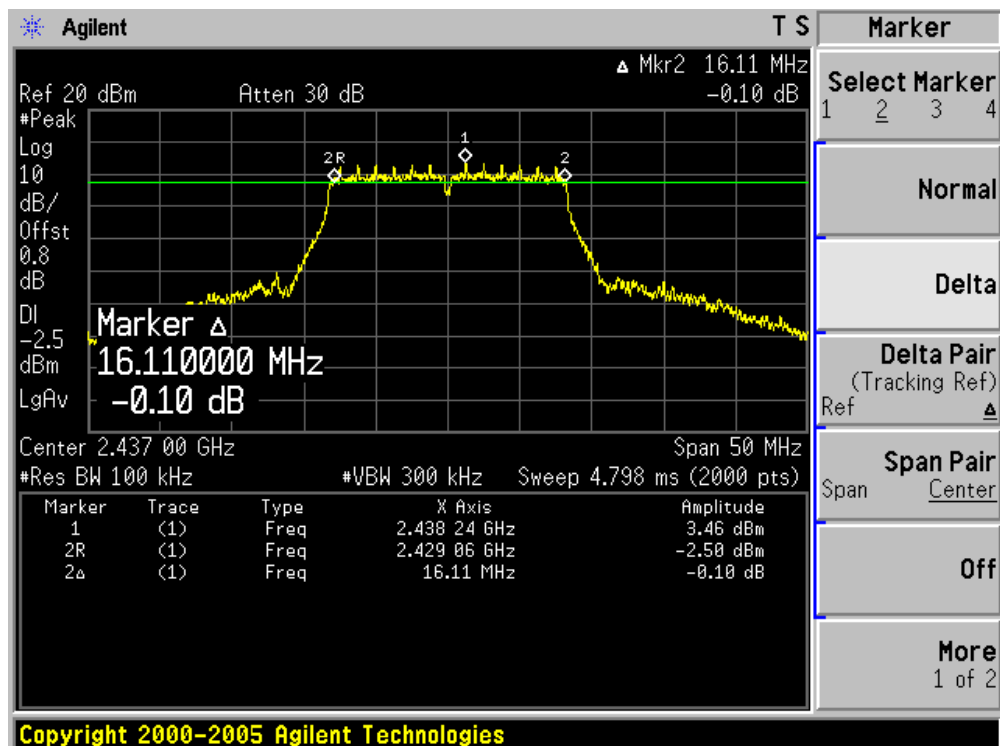


Channel 11 (2462MHz)

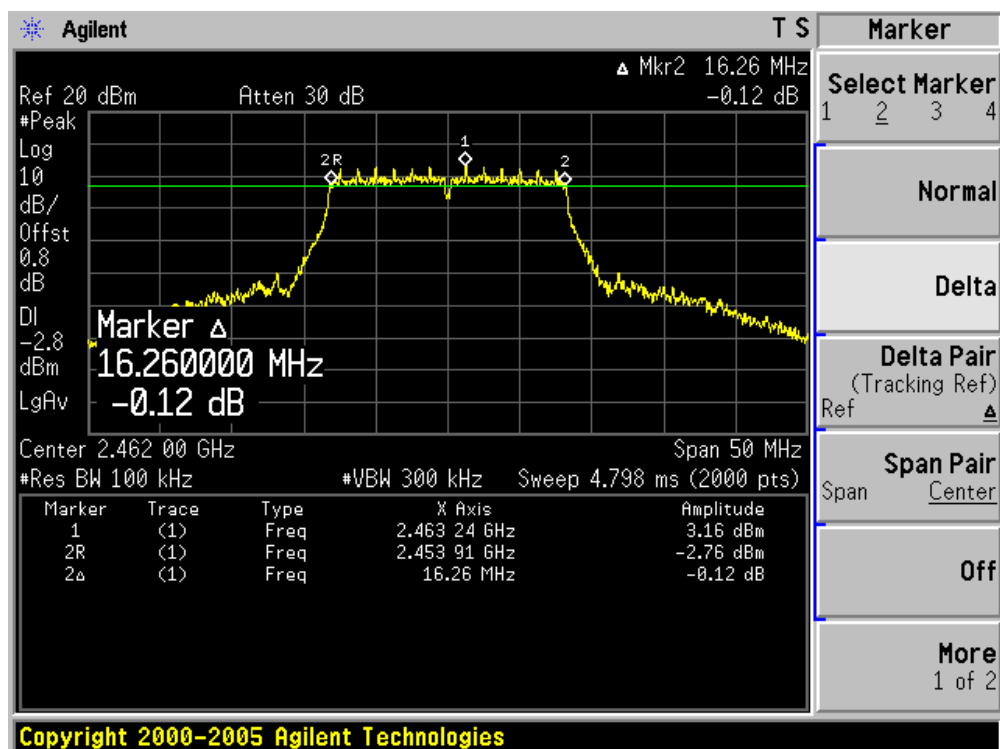


|           |   |                                     |
|-----------|---|-------------------------------------|
| Product   | : | Home Gateway                        |
| Test Item | : | 6dB Occupied Bandwidth              |
| Test Mode | : | Mode 3: Transmit by 802.11n (20MHz) |

| Channel No. | Frequency (MHz) | Occupied Bandwidth (kHz) | Limit (kHz) | Result |
|-------------|-----------------|--------------------------|-------------|--------|
| 01          | 2412            | 17260                    | 500         | Pass   |
| 06          | 2437            | 17160                    | 500         | Pass   |
| 11          | 2462            | 17010                    | 500         | Pass   |


Channel 01 (2412MHz)

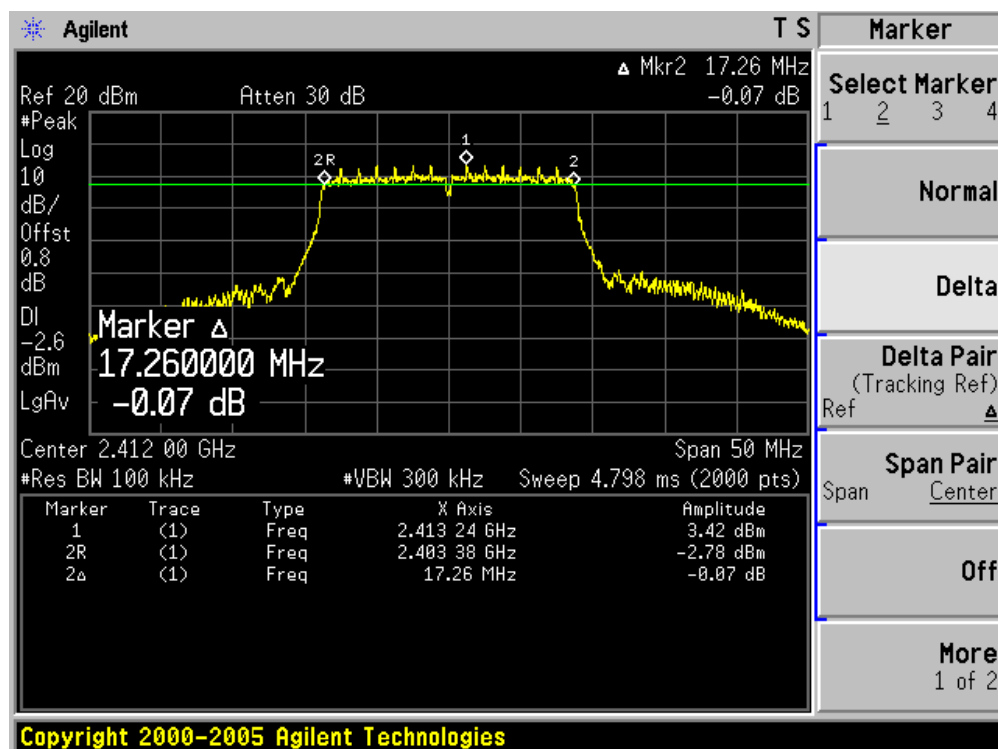

Channel 06 (2437MHz)

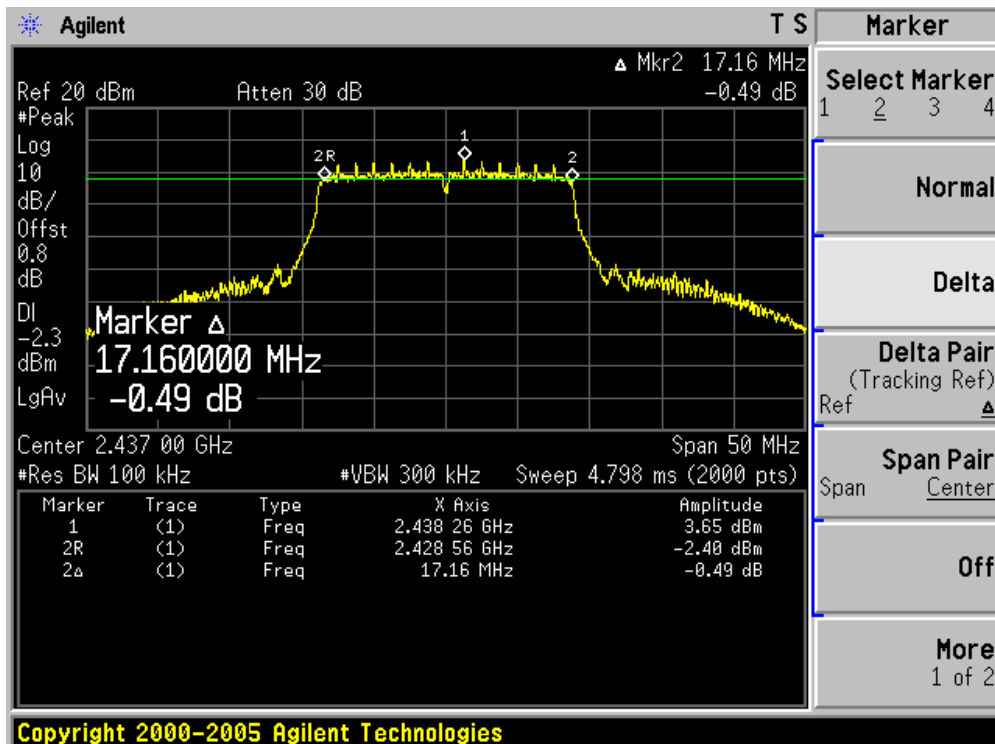


Channel 11 (2462MHz)

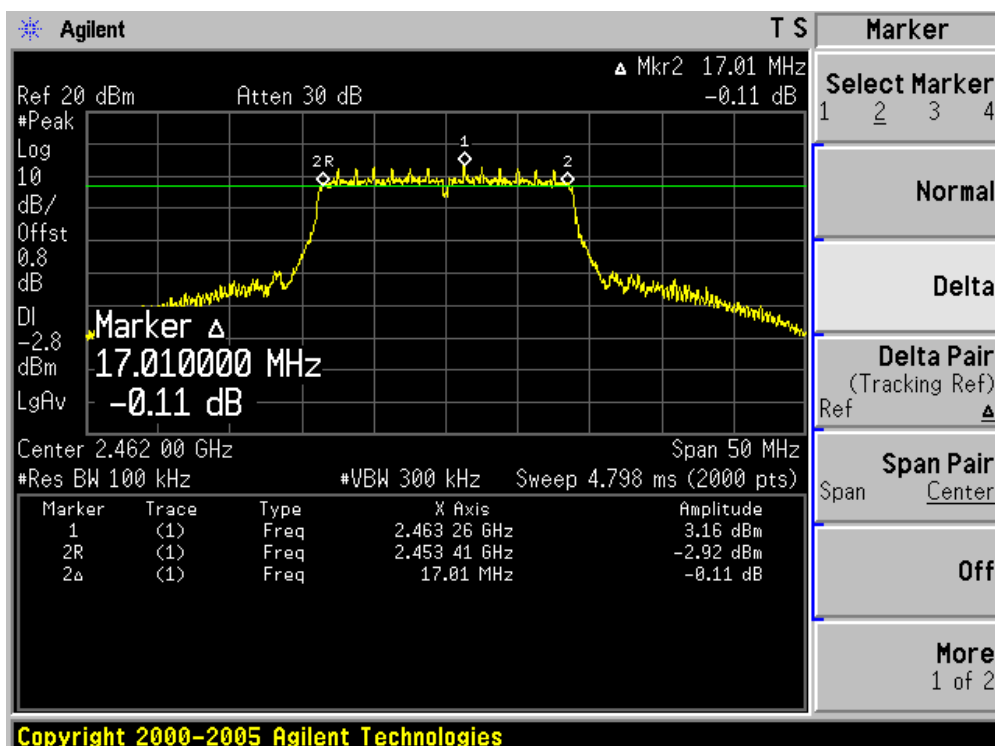


|           |   |                                     |
|-----------|---|-------------------------------------|
| Product   | : | Home Gateway                        |
| Test Item | : | 6dB Occupied Bandwidth              |
| Test Mode | : | Mode 4: Transmit by 802.11n (40MHz) |

| Channel No. | Frequency (MHz) | Occupied Bandwidth (kHz) | Limit (kHz) | Result |
|-------------|-----------------|--------------------------|-------------|--------|
| 03          | 2422            | 35660                    | 500         | Pass   |
| 06          | 2437            | 35300                    | 500         | Pass   |
| 09          | 2452            | 35750                    | 500         | Pass   |


Channel 03 (2422MHz)

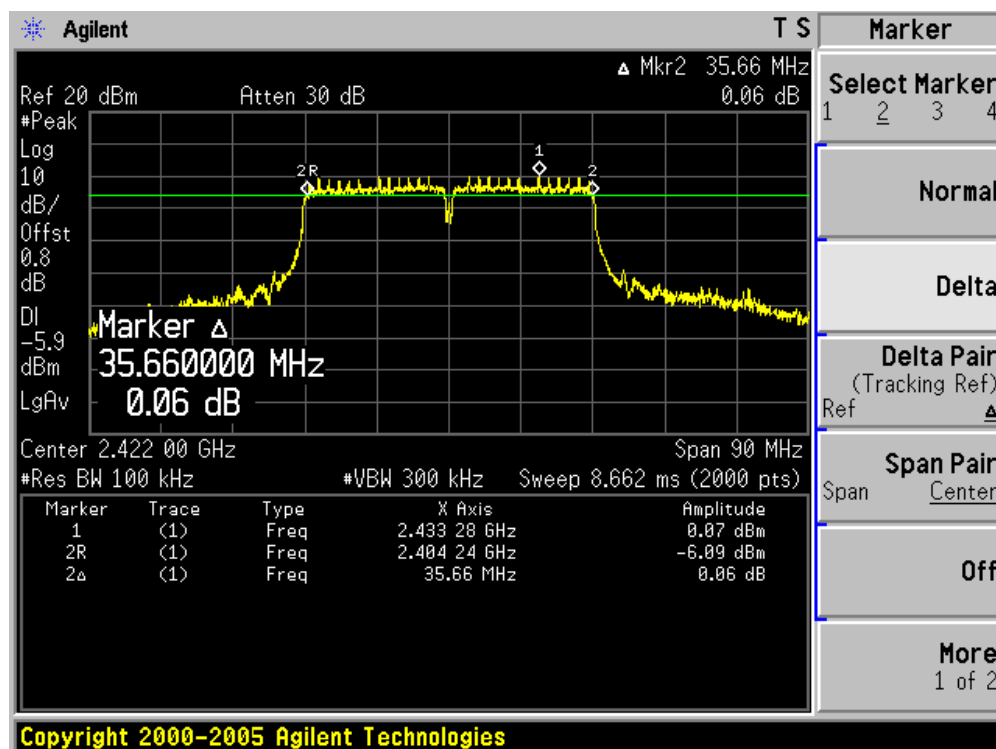

Channel 06 (2437MHz)

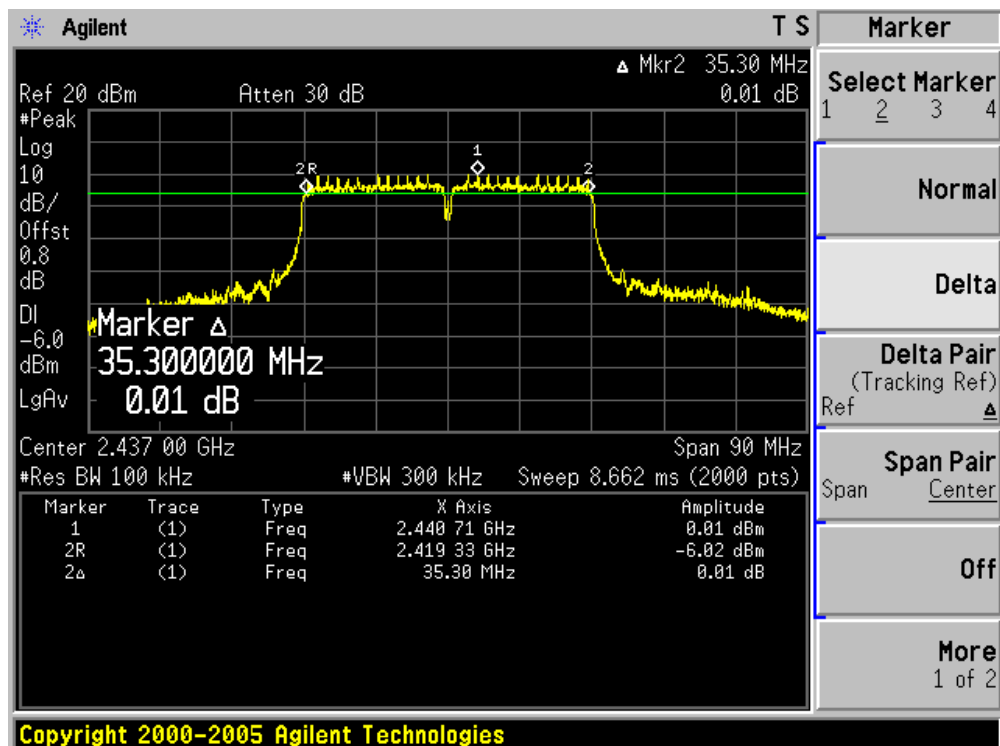

Channel 09 (2452MHz)

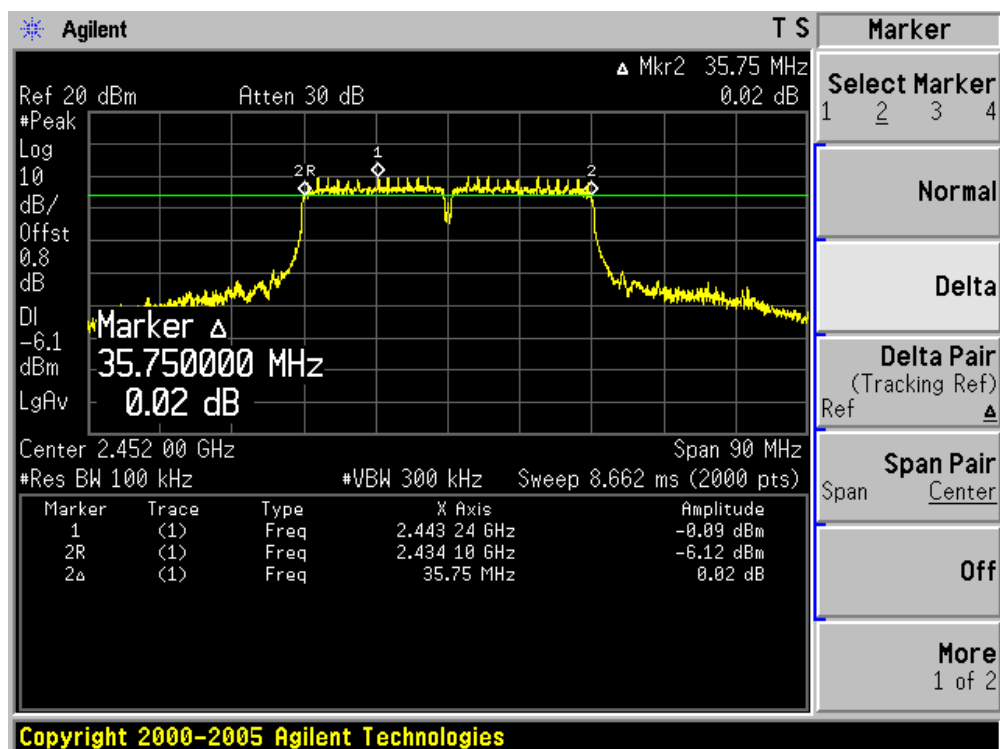

## 9. Power Output


### 9.1. Test Equipment

Power Output / AC-6

| Instrument                 | Manufacturer | Type No. | Serial No. | Cal. Date  |
|----------------------------|--------------|----------|------------|------------|
| Wideband Peak Power Meter  | Anritsu      | ML2495A  | 0905006    | 2010/01/12 |
| Power Sensor               | Anritsu      | MA2411B  | 0846014    | 2010/01/12 |
| Temperature/Humidity Meter | zhicheng     | ZC1-2    | AC6-TH     | 2010/01/14 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 9.2. Test Setup

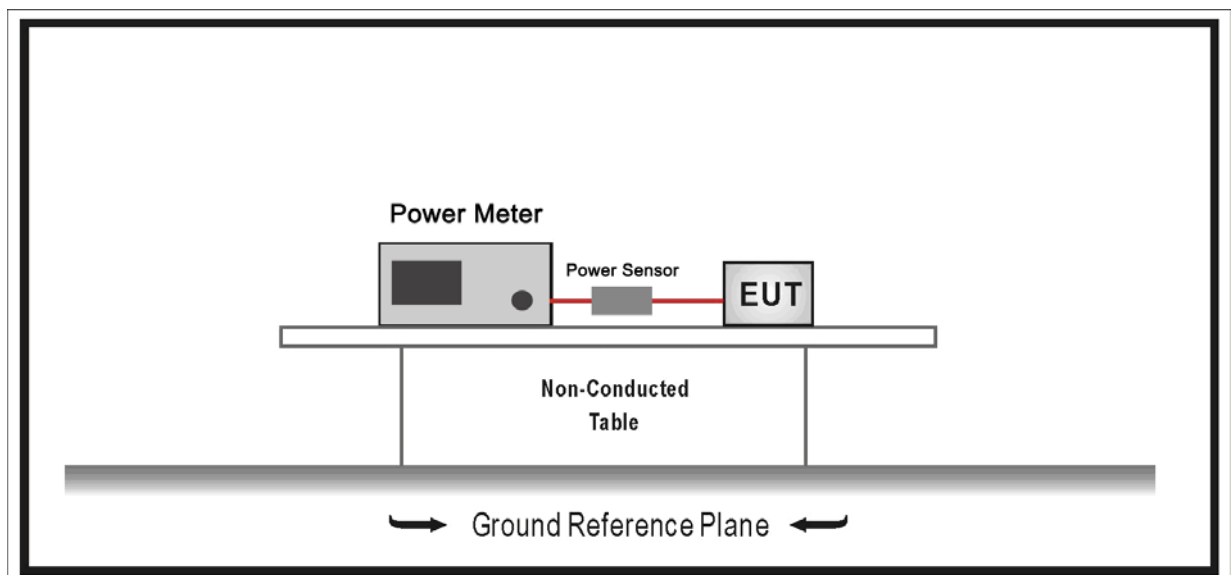

### 9.3. Limit

The maximum peak power shall be less 1 Watt (30dBm).

Note: the conducted output power limit specified above is based on the use the antennas with directional gains that do not exceed 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values above, as appropriate, by the amount in dB that the directional gain of antenna exceeds 6 dBi.

#### **9.4. Test Procedure**

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Use the wideband power meter to test peak power and record the result.

#### **9.5. Uncertainty**

The measurement uncertainty is defined as  $\pm 1.27$  dB

## 9.6. Test Result

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (blue marker) for final test of each channel.

| MCS Index<br>for 802.11n | Spatial<br>Streams | Data Rate (Mbps) |         |                 |          |                 |          |
|--------------------------|--------------------|------------------|---------|-----------------|----------|-----------------|----------|
|                          |                    | 802.11b          | 802.11g | 20MHz Bandwidth |          | 40MHz Bandwidth |          |
|                          |                    |                  |         | 800ns GI        | 400ns GI | 800ns GI        | 400ns GI |
| 0                        | 1                  | 1                | 6       | 6.5             | 7.2      | 13.5            | 15.0     |
| 1                        | 1                  | 2                | 9       | 13.0            | 14.4     | 27.0            | 30.0     |
| 2                        | 1                  | 5.5              | 12      | 19.5            | 21.7     | 40.5            | 45.0     |
| 3                        | 1                  | 11               | 18      | 26.0            | 28.9     | 54.0            | 60.0     |
| 4                        | 1                  | ---              | 24      | 39.0            | 43.3     | 81.0            | 90.0     |
| 5                        | 1                  | ---              | 36      | 52.0            | 57.8     | 108.0           | 120.0    |
| 6                        | 1                  | ---              | 48      | 58.5            | 65.0     | 121.5           | 135.0    |
| 7                        | 1                  | ---              | 54      | 65.0            | 72.2     | 135.0           | 150.0    |

Power output at various data rates:

| Test Mode     | Frequency (MHz) | Channel | Data Rate | Peak Power (dBm) |
|---------------|-----------------|---------|-----------|------------------|
| 802.11b       | 2437            | 6       | 1         | 17.14            |
|               |                 |         | 2         | 17.02            |
|               |                 |         | 5.5       | 16.84            |
|               |                 |         | 11        | 16.65            |
| 802.11g       | 2437            | 6       | 6         | 22.72            |
|               |                 |         | 9         | 22.55            |
|               |                 |         | 12        | 22.34            |
|               |                 |         | 18        | 22.16            |
|               |                 |         | 24        | 22.04            |
|               |                 |         | 36        | 21.82            |
|               |                 |         | 48        | 21.74            |
|               |                 |         | 54        | 21.59            |
| 802.11n (20M) | 2437            | 6       | 6.5       | 23.32            |
|               |                 |         | 13.0      | 23.14            |
|               |                 |         | 19.5      | 23.08            |
|               |                 |         | 26.0      | 22.82            |
|               |                 |         | 39.0      | 22.47            |
|               |                 |         | 52.0      | 22.21            |
|               |                 |         | 58.5      | 22.02            |
|               |                 |         | 65.0      | 21.86            |
| 802.11n (40M) | 2437            | 6       | 13.5      | 22.99            |
|               |                 |         | 27.0      | 22.55            |
|               |                 |         | 40.5      | 22.28            |
|               |                 |         | 54.0      | 22.04            |
|               |                 |         | 81.0      | 21.78            |
|               |                 |         | 108.0     | 21.26            |
|               |                 |         | 121.5     | 20.75            |
|               |                 |         | 135.0     | 20.36            |

|           |   |              |
|-----------|---|--------------|
| Product   | : | Home Gateway |
| Test Item | : | Power Output |

| Test Mode    | Channel No. | Frequency (MHz) | Conducted Power (dBm) | Limit (dBm) | Result |
|--------------|-------------|-----------------|-----------------------|-------------|--------|
| 802.11b      | 01          | 2412            | 17.18                 | 30          | Pass   |
|              | 06          | 2437            | 17.14                 | 30          | Pass   |
|              | 11          | 2462            | 16.76                 | 30          | Pass   |
| 802.11g      | 01          | 2412            | 22.69                 | 30          | Pass   |
|              | 06          | 2437            | 22.72                 | 30          | Pass   |
|              | 11          | 2462            | 22.38                 | 30          | Pass   |
| 802.11n(20M) | 01          | 2412            | 23.29                 | 30          | Pass   |
|              | 06          | 2437            | <b>23.32</b>          | 30          | Pass   |
|              | 11          | 2462            | 23.00                 | 30          | Pass   |
| 802.11n(40M) | 03          | 2422            | 23.04                 | 30          | Pass   |
|              | 06          | 2437            | <b>22.99</b>          | 30          | Pass   |
|              | 09          | 2452            | 22.85                 | 30          | Pass   |

## 10. Power Spectral Density


### 10.1. Test Equipment

Power Spectral Density / AC-6

| Instrument                 | Manufacturer | Type No. | Serial No. | Cal. Date  |
|----------------------------|--------------|----------|------------|------------|
| Spectrum Analyzer          | Agilent      | N9020A   | MY49100159 | 2009/05/06 |
| Temperature/Humidity Meter | zhicheng     | ZC1-2    | AC6-TH     | 2010/01/14 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 10.2. Test Setup

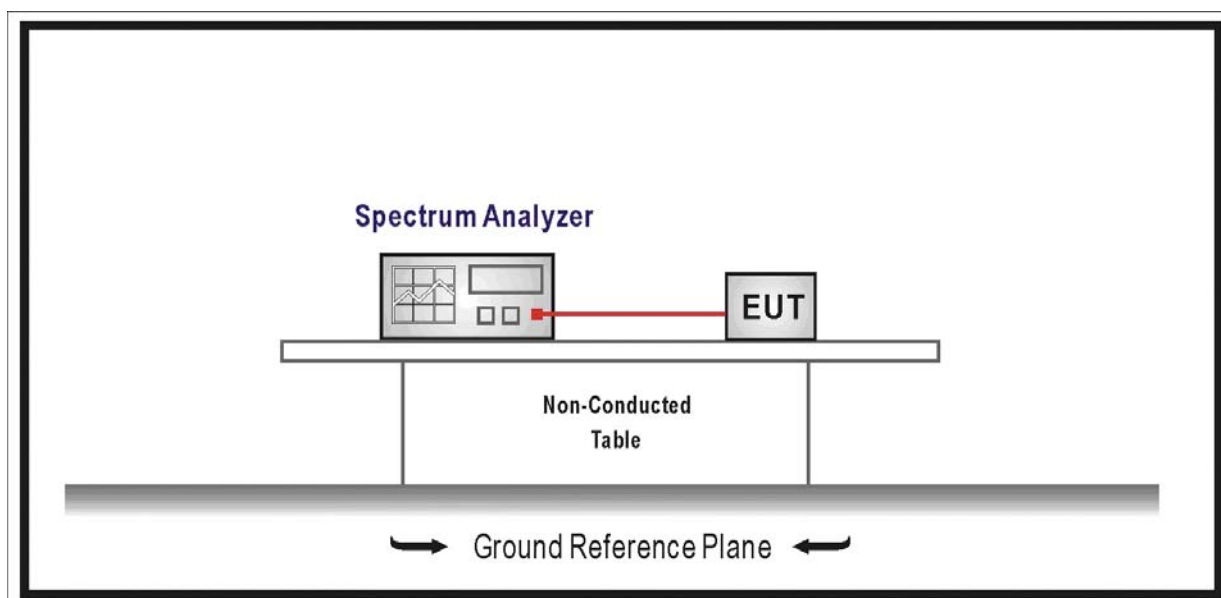

### 10.3. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiated to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

**10.4. Test Procedure**

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW= 3 kHz, Set VBW  $\geq$  10 kHz, Sweep time=100s, Set detector=Peak detector.

**10.5. Uncertainty**


The measurement uncertainty is defined as  $\pm 1.27$  dB

## 10.6. Test Result


|           |   |                             |
|-----------|---|-----------------------------|
| Product   | : | Home Gateway                |
| Test Item | : | Power Spectral Density      |
| Test Mode | : | Mode 1: Transmit by 802.11b |

| Channel No. | Frequency (MHz) | Power Spectral Density (dBm/3kHz) | Limit (dBm) | Result |
|-------------|-----------------|-----------------------------------|-------------|--------|
| 01          | 2412            | -11.56                            | 8           | Pass   |
| 06          | 2437            | -11.32                            | 8           | Pass   |
| 11          | 2462            | -11.91                            | 8           | Pass   |


Channel 01 (2412MHz)

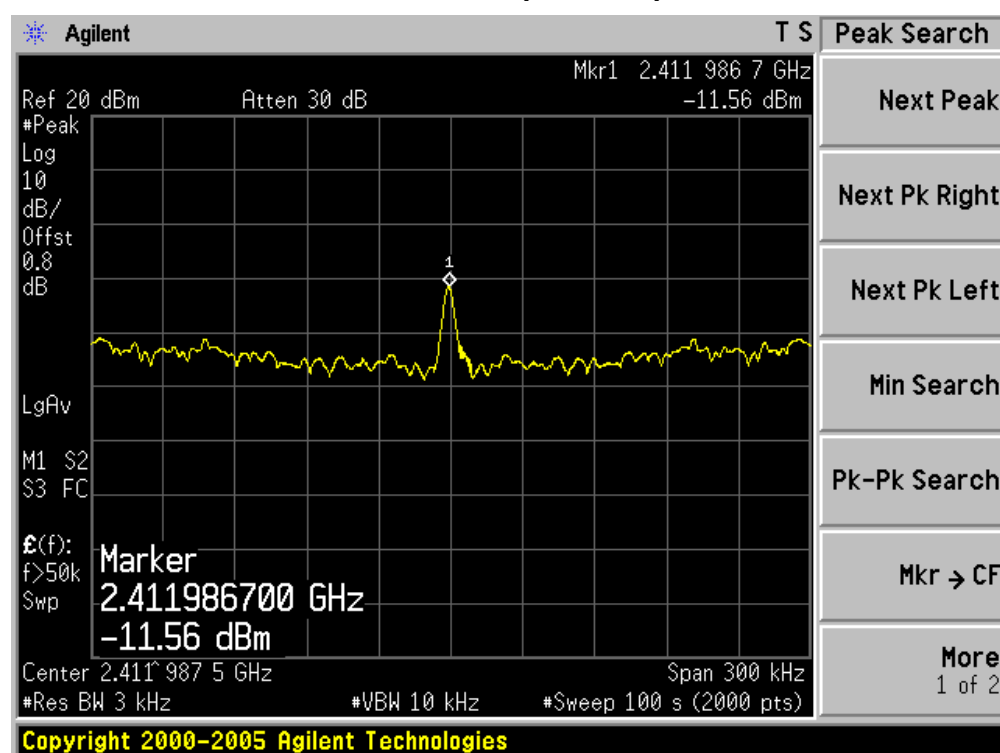

Channel 06 (2437MHz)

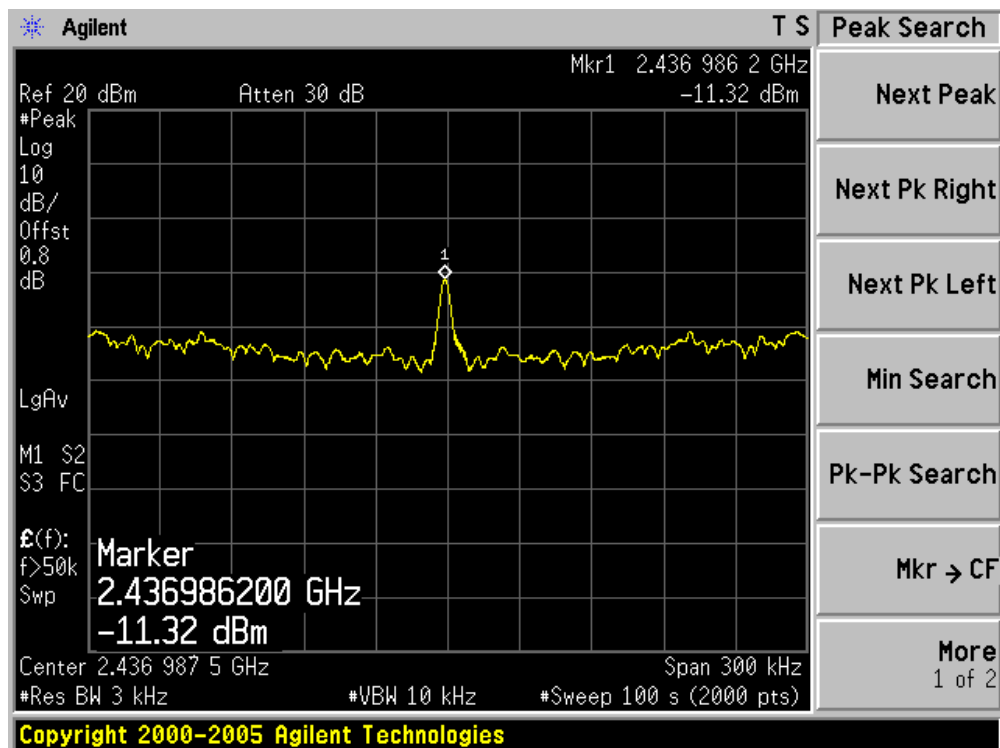


Channel 11 (2462MHz)

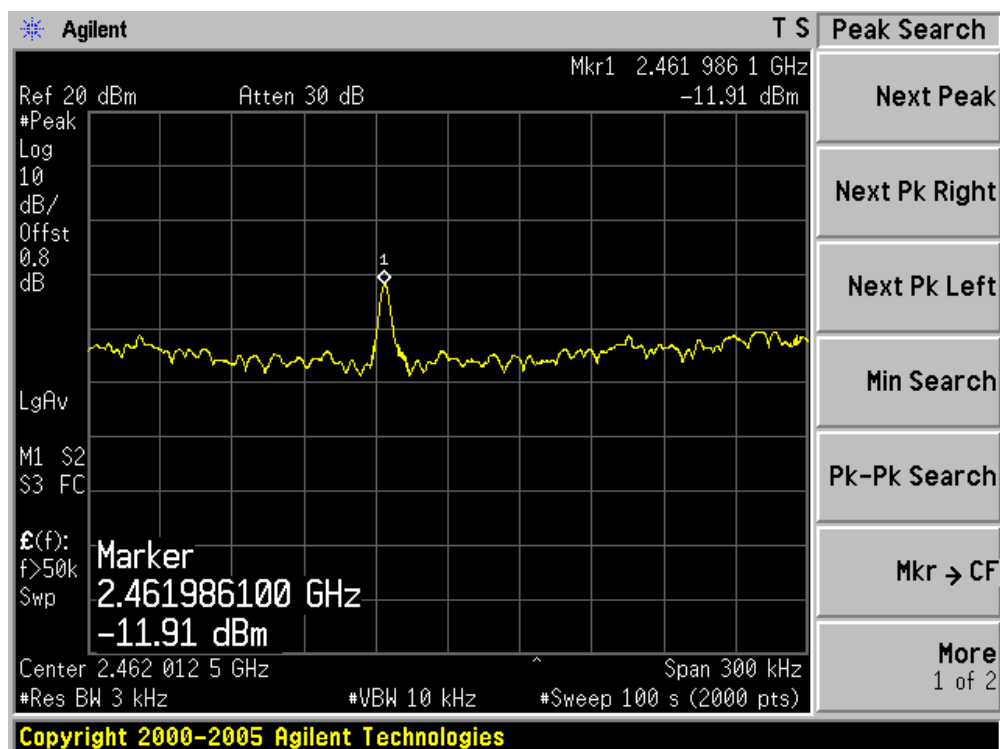


|           |   |                             |
|-----------|---|-----------------------------|
| Product   | : | Home Gateway                |
| Test Item | : | Power Spectral Density      |
| Test Mode | : | Mode 2: Transmit by 802.11g |

| Channel No. | Frequency (MHz) | Power Spectral Density (dBm/3kHz) | Limit (dBm) | Result |
|-------------|-----------------|-----------------------------------|-------------|--------|
| 01          | 2412            | -12.67                            | 8           | Pass   |
| 06          | 2437            | -12.31                            | 8           | Pass   |
| 11          | 2462            | -12.59                            | 8           | Pass   |


Channel 01 (2412MHz)

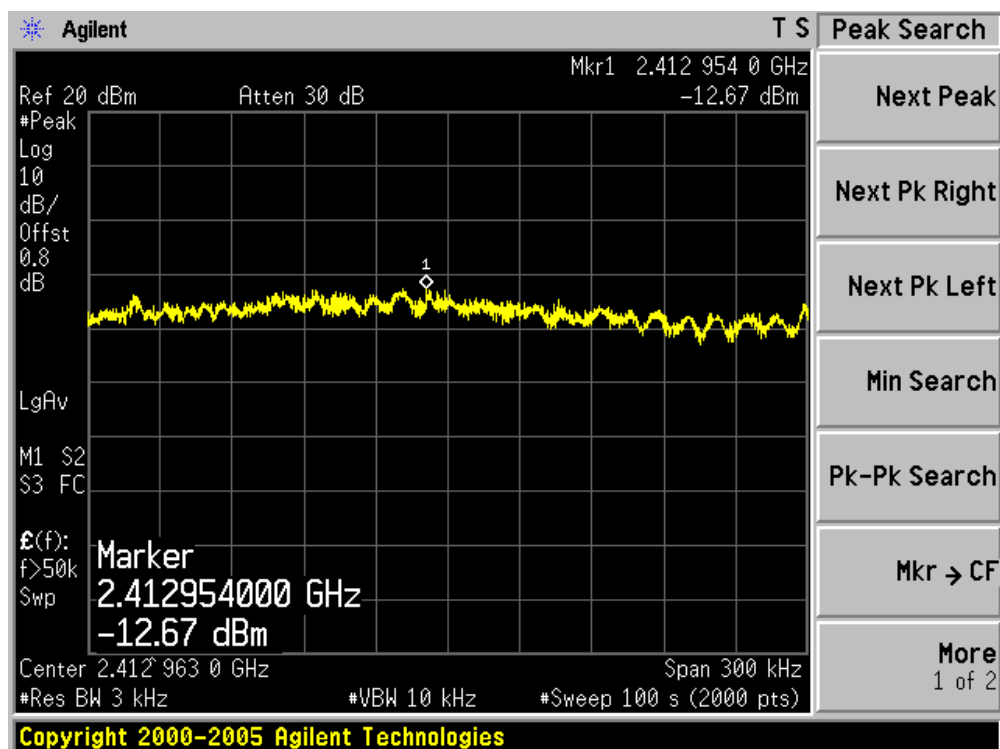

### Channel 06 (2437MHz)

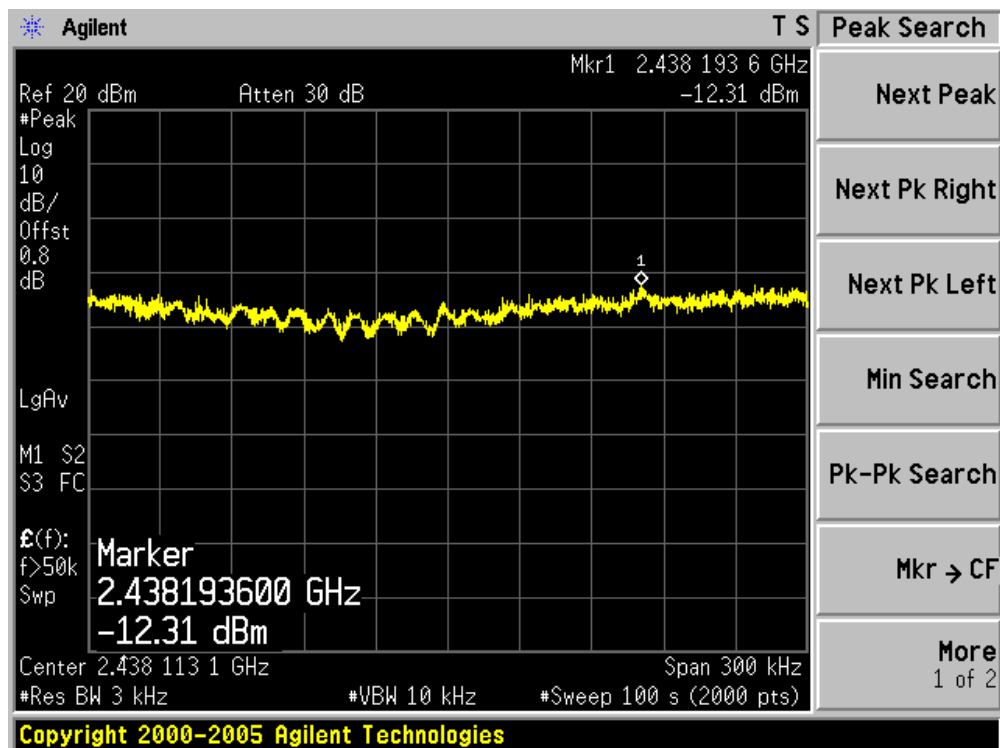


### Channel 11 (2462MHz)

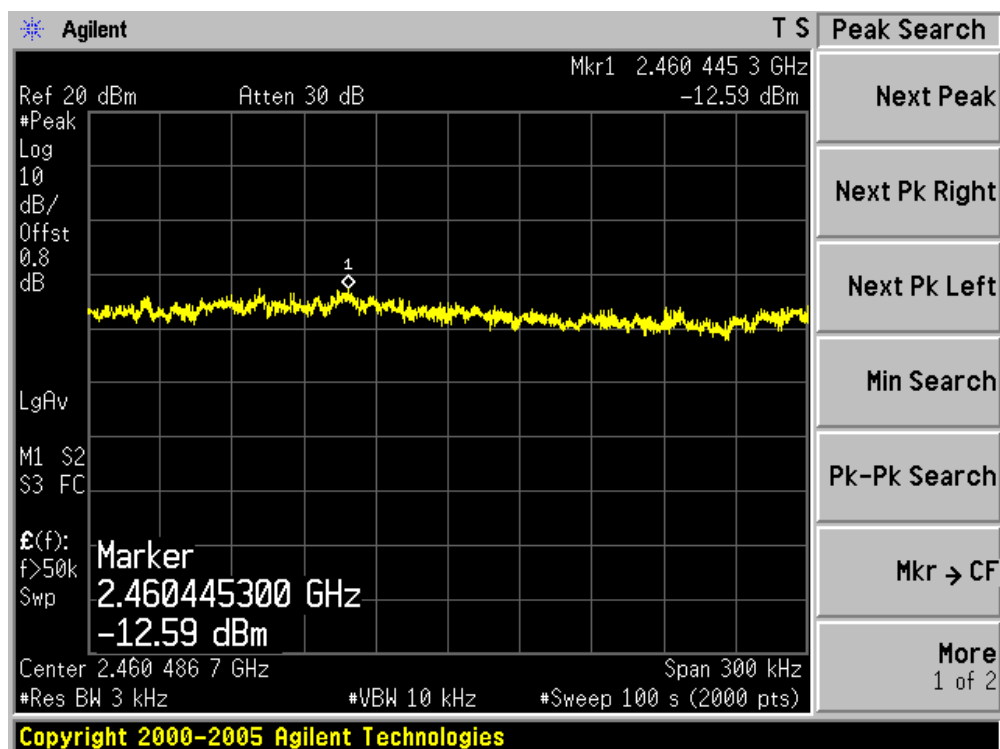


|           |   |                                     |
|-----------|---|-------------------------------------|
| Product   | : | Home Gateway                        |
| Test Item | : | Power Spectral Density              |
| Test Mode | : | Mode 3: Transmit by 802.11n (20MHz) |

| Channel No. | Frequency (MHz) | Power Spectral Density (dBm/3kHz) | Limit (dBm) | Result |
|-------------|-----------------|-----------------------------------|-------------|--------|
| 01          | 2412            | -12.68                            | 8           | Pass   |
| 06          | 2437            | -10.81                            | 8           | Pass   |
| 11          | 2462            | -13.24                            | 8           | Pass   |


Channel 01 (2412MHz)

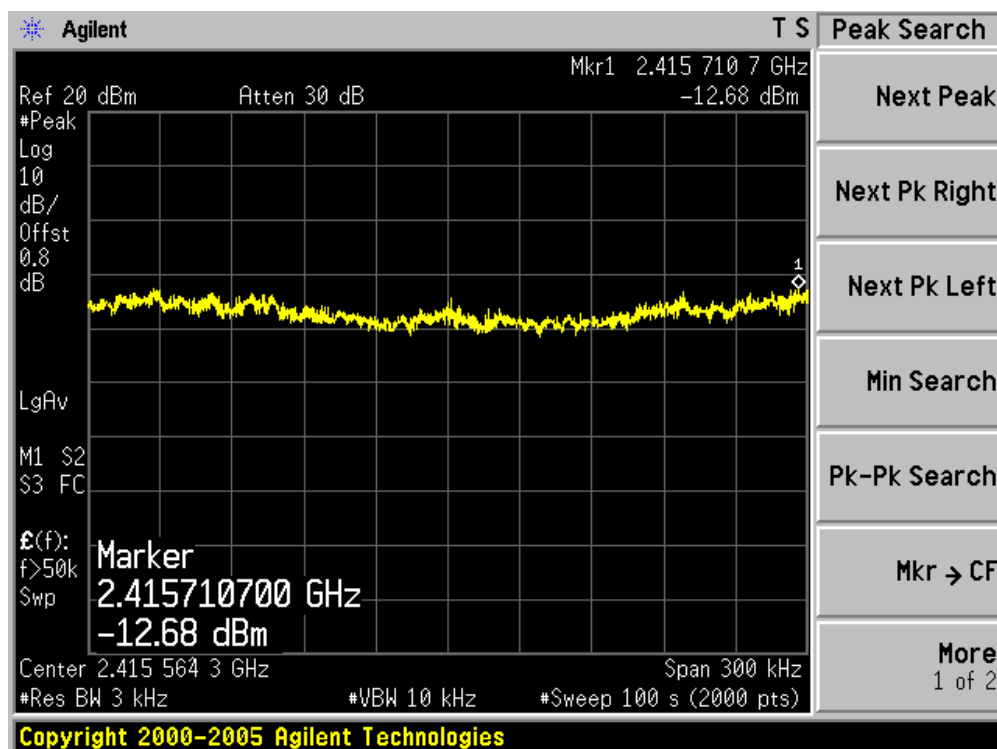

### Channel 06 (2437MHz)

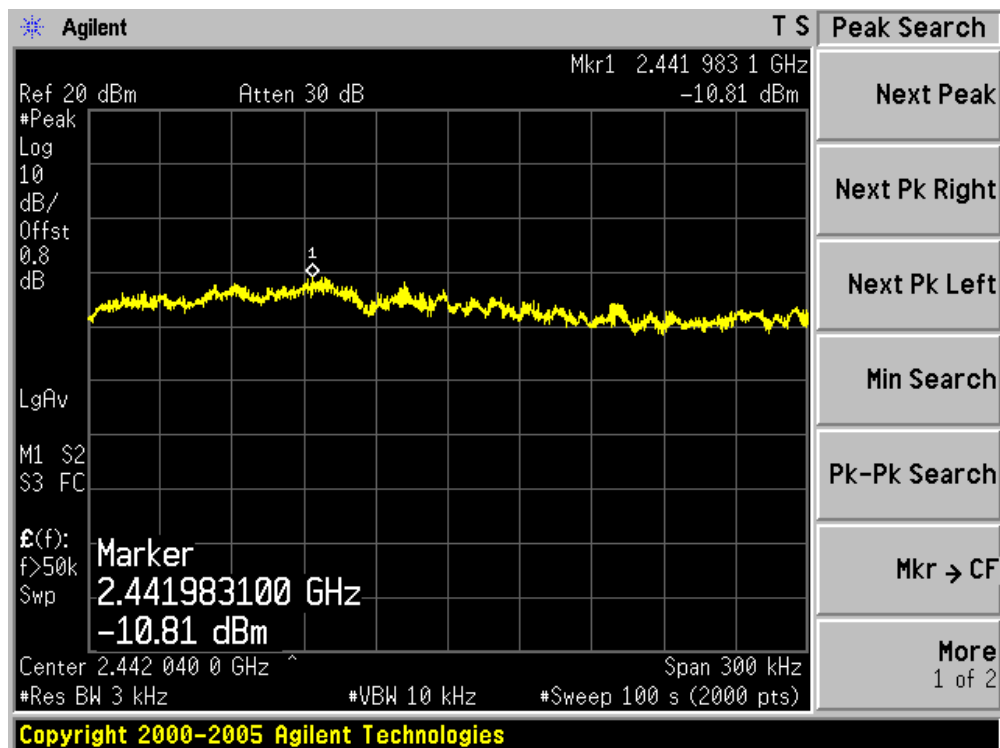


### Channel 11 (2462MHz)

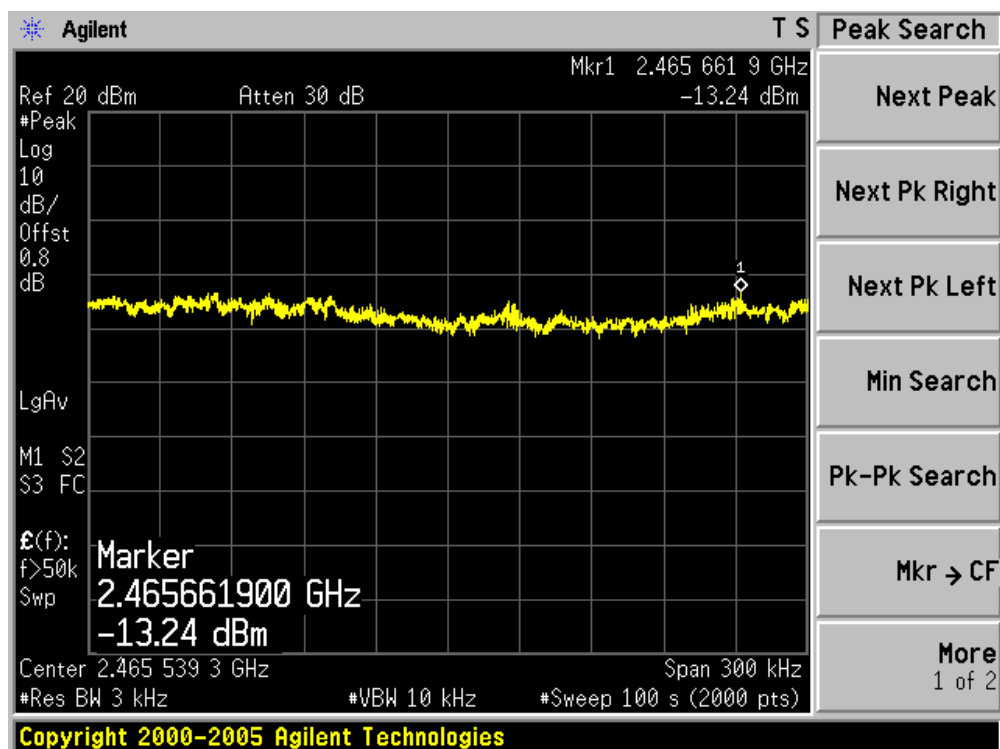


|           |   |                                     |
|-----------|---|-------------------------------------|
| Product   | : | Home Gateway                        |
| Test Item | : | Power Spectral Density              |
| Test Mode | : | Mode 4: Transmit by 802.11n (40MHz) |

| Channel No. | Frequency (MHz) | Power Spectral Density (dBm/3kHz) | Limit (dBm) | Result |
|-------------|-----------------|-----------------------------------|-------------|--------|
| 03          | 2422            | -14.42                            | 8           | Pass   |
| 06          | 2437            | -14.52                            | 8           | Pass   |
| 09          | 2452            | -14.74                            | 8           | Pass   |

Channel 03 (2422MHz)

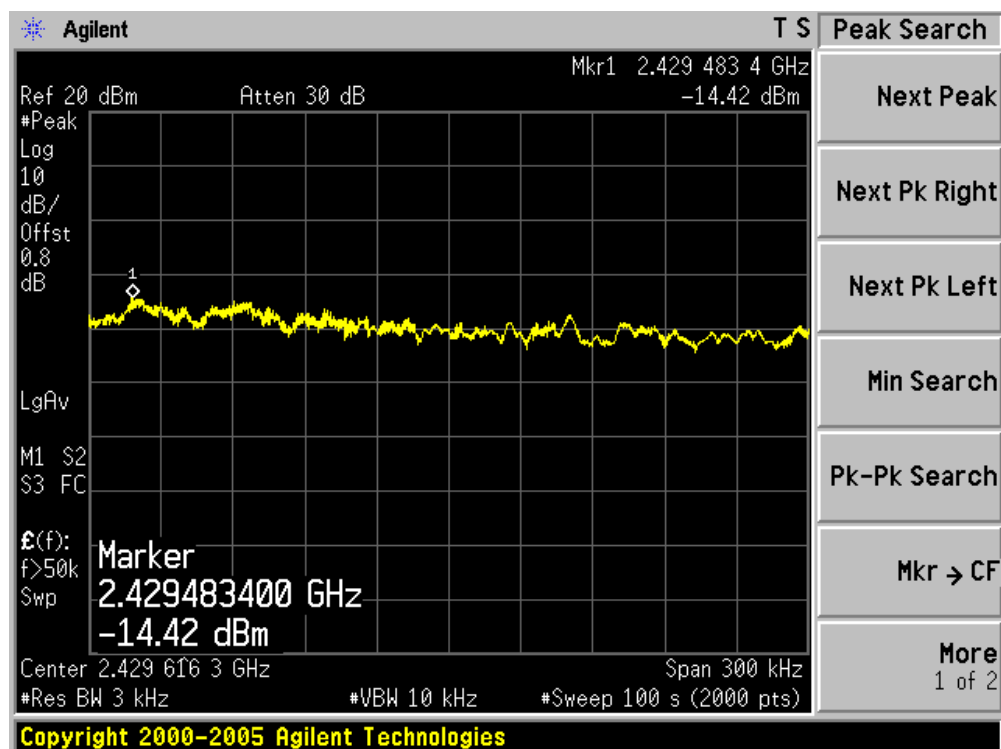

Channel 06 (2437MHz)

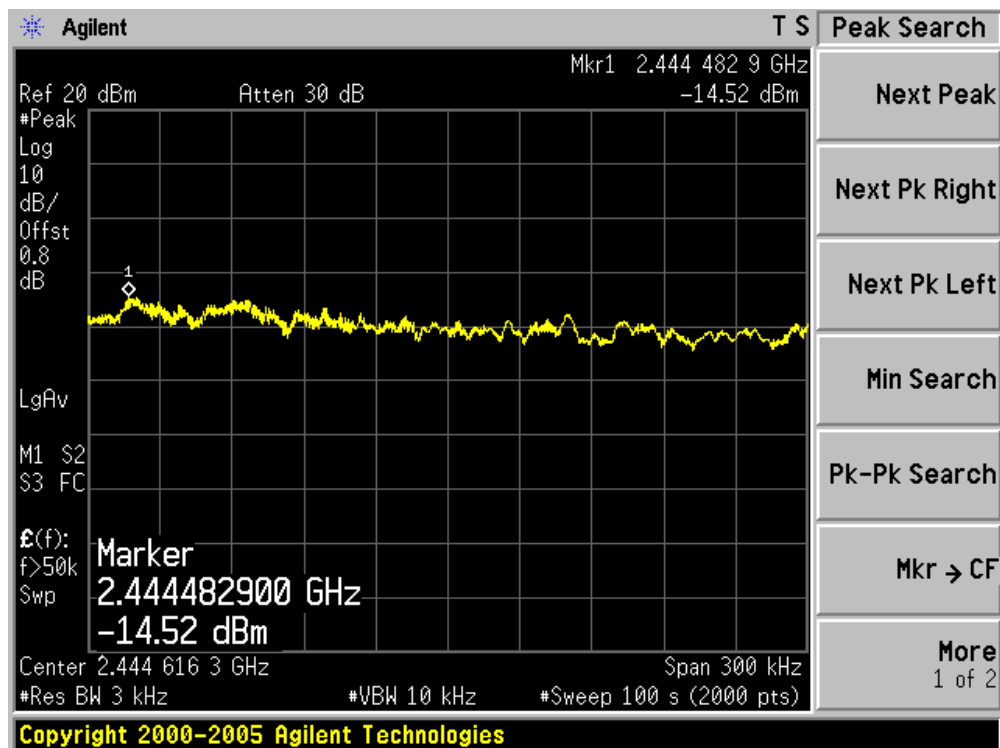

Channel 09 (2452MHz)

