

# FCC Test Report

**APPLICANT** : Huawei Technologies Co., Ltd.  
**EQUIPMENT** : Home Gateway  
**BRAND NAME** : HUAWEI  
**MODEL NAME** : HG552d  
**FCC ID** : QISHG552D  
**STANDARD** : FCC 47 CFR FCC Part 15 Subpart B  
**CLASSIFICATION** : Certification

The product was received on Apr. 07, 2011 and completely tested on May. 04, 2011. We, SPORTON INTERNATIONAL (KUNSAHN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



## TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT ..... 4

1. GENERAL DESCRIPTION ..... 5

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Feature of Equipment Under Test..... 5

    1.4. Test Site ..... 6

    1.5. Applied Standards ..... 6

    1.6. Ancillary Equipment List..... 7

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8

    2.1. Test Mode ..... 8

    2.2. Connection Diagram of Test System ..... 9

    2.3. Test Software ..... 10

3. TEST RESULT ..... 11

    3.1. Test of AC Conducted Emission Measurement ..... 11

    3.2. Test of Radiated Emission Measurement ..... 15

4. LIST OF MEASURING EQUIPMENT ..... 19

5. UNCERTAINTY OF EVALUATION ..... 20

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.107	7.2.2	AC Conducted Emission	< 15.107 limits < RSS-Gen table 2 limits	PASS	Under limit 10.93 dB at 10.96 MHz
3.2	15.109	7.2.3.2	Radiated Emission	< 15.109 limits or < RSS-Gen table 1 limits (Section 6)	PASS	Under limit 0.34 dB at 52.41 MHz



# 1. General Description

## 1.1. Applicant

Huawei Technologies Co., Ltd.

Administration Building, Huawei Base, Bantian, Longgang District, Shenzhen 518129 P.R.C.

## 1.2. Manufacturer

Huawei Technologies Co., Ltd.

Administration Building, Huawei Base, Bantian, Longgang District, Shenzhen 518129 P.R.C.

## 1.3. Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Home Gateway
Brand Name	HUAWEI
Model Name	HG552d
FCC ID	QISHG552D
Tx Frequency Range	2400 MHz ~ 2483.5 MHz
Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Antenna Type	PCB Antenna
HW Version	HG552d VER.B
SW Version	HG552dV100R001C07B011
Type of Modulation	802.11b : DSSS (BPSK / QPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4. Test Site

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.	
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	CO01-KS	03CH01-KS

### 1.5. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2003
- IC RSS-Gen Issue 3

Remark:

- 1, All test items were verified and recorded according to the standards and without any deviation during the test.
- 2, This report is intention of applying for FCC 15B certification only.



### 1.6. Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Acer	Trave Imate2413Lci	QDS-BRCM1016	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
2.	Notebook	DELL	P08S	2DS-BRCM1030	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	iPod	Apple	A1199	FCC DoC	Unshielded, 1.2 m	N/A
4.	Router	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	Telephone	BBK	HCD007(6082)TSD	N/A	N/A	N/A
6.	Telephone	BBK	HCD007(6082)TSD	N/A	N/A	N/A
7.	CO	Askey	AMA1011	N/A	N/A	Unshielded, 1.8 m
8.	ADSL	Dynalink	RTA1320	FCC DoC	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m

## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition		
		EMI AC	EMI RE<1G	EMI RE≥1G
1.	Charging Mode (EUT with adapter)	☒	☒	☒

**Abbreviations:**

- EMI AC: AC conducted emissions
- EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz


Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1	Mode 1 : WLAN Link + TC + RJ11 + LAN Link + Adapter 1
Radiated Emissions < 1GHz	1	Mode 1 : WLAN Link + TC + RJ11 + LAN Link + Adapter 1
Radiated Emissions ≥ 1GHz	1	Mode 1 : WLAN Link + TC + RJ11 + LAN Link + Adapter 1

**Remark:**

1. TC stands for Configuration of Test consists of Telephones, Router, CO, iPod and Notebook.

## 2.2. Connection Diagram of Test System

<EUT with Adapter Mode>

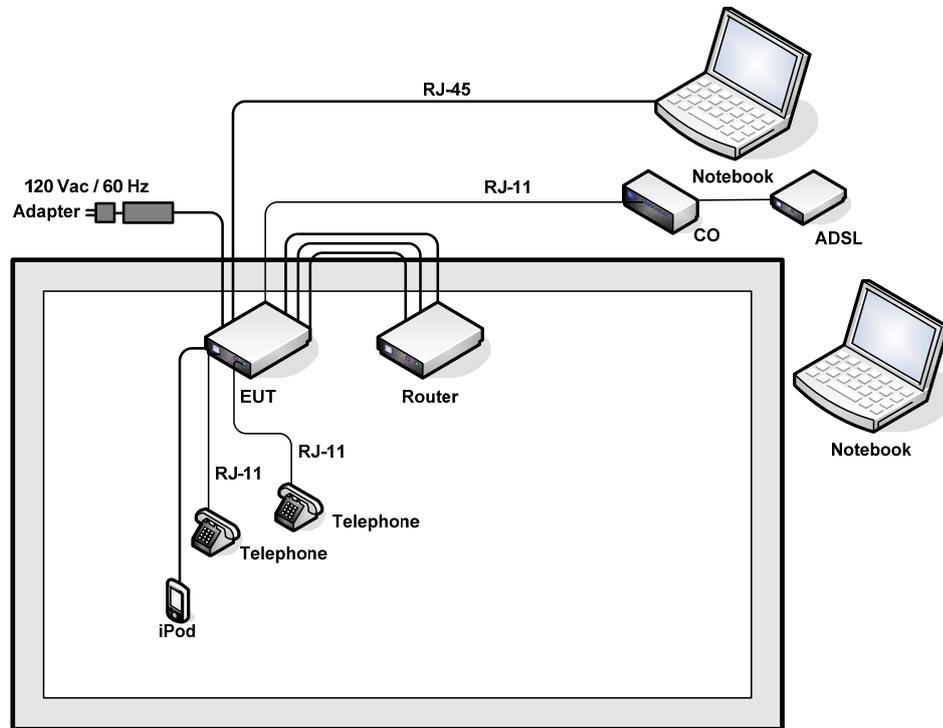



## **2.3. Test Software**

The EUT was linked with CO via RJ-11, linked with notebook via RJ-45; linked with Telephones via RJ-11; and attached with notebook via WLAN function during EMC testing.

### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.1.4 Test Setup

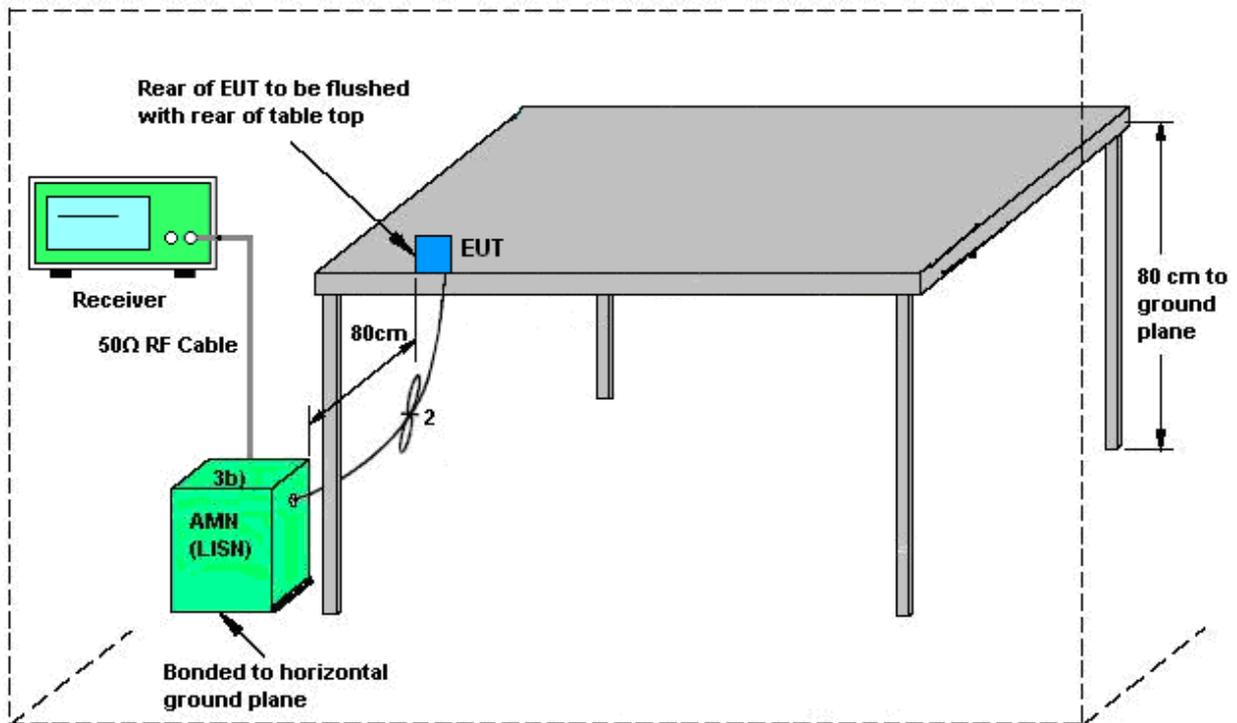


AMN = Artificial mains network (LISN)  
AE = Associated equipment  
EUT = Equipment under test  
ISN = Impedance stabilization network



3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~21°C
Test Engineer :	Jason Chia	Relative Humidity :	40~41%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN Link + TC + RJ11 + LAN Link + Adapter 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

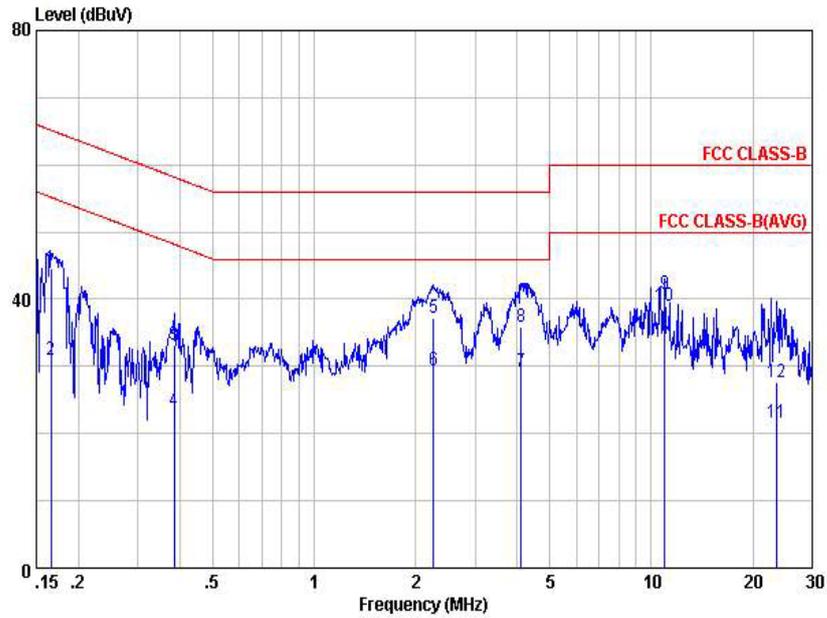


Site : C001-RS  
 Condition: FCC CLASS-B LISN-100807 LINE

mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17	44.47	-20.70	65.17	34.40	-0.07	10.14	QP
2	0.17	31.07	-24.10	55.17	21.00	-0.07	10.14	Average
3	0.39	33.31	-24.86	58.17	23.20	-0.08	10.19	QP
4	0.39	23.31	-24.86	48.17	13.20	-0.08	10.19	Average
5	2.26	37.13	-18.87	56.00	26.90	-0.11	10.34	QP
6	2.26	29.33	-16.67	46.00	19.10	-0.11	10.34	Average
7	4.11	29.26	-16.74	46.00	19.00	-0.13	10.39	Average
8	4.11	35.86	-20.14	56.00	25.60	-0.13	10.39	QP
9	10.96	40.77	-19.23	60.00	30.40	-0.10	10.47	QP
10	10.96	39.07	-10.93	50.00	28.70	-0.10	10.47	Average
11	23.64	21.56	-28.44	50.00	10.79	0.14	10.63	Average
12	23.64	27.66	-32.34	60.00	16.89	0.14	10.63	QP



Test Mode :	Mode 1	Temperature :	20~21°C
Test Engineer :	Jason Chia	Relative Humidity :	40~41%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN Link + TC + RJ11 + LAN Link + Adapter 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

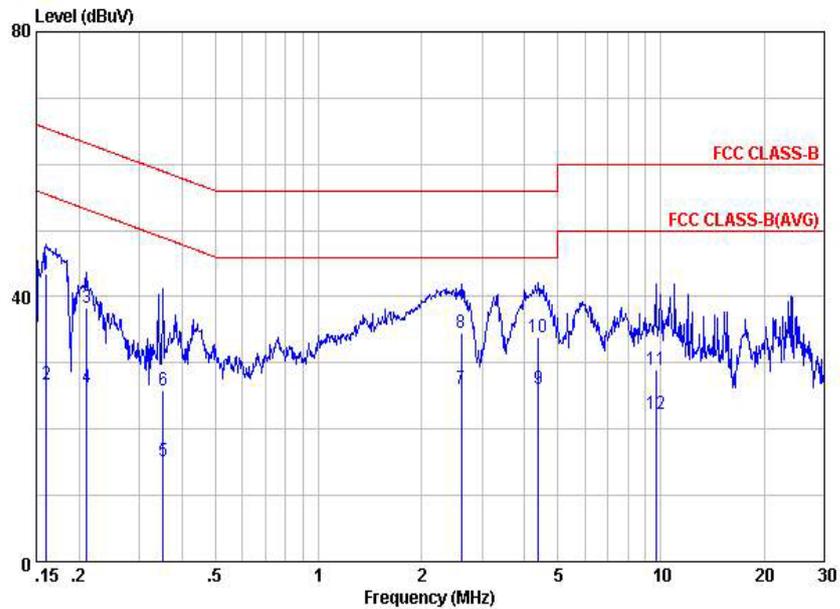

Site : C001-KS  
 Condition: FCC CLASS-B LISN-100807 NEUTRAL

mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16	43.37	-22.06	65.43	33.32	-0.09	10.14	QP
2	0.16	26.77	-28.66	55.43	16.72	-0.09	10.14	Average
3	0.21	38.38	-24.80	63.18	28.30	-0.07	10.15	QP
4	0.21	26.38	-26.80	53.18	16.30	-0.07	10.15	Average
5	0.35	15.20	-33.71	48.91	5.10	-0.08	10.18	Average
6	0.35	25.90	-33.01	58.91	15.80	-0.08	10.18	QP
7	2.61	26.14	-19.86	46.00	15.89	-0.11	10.36	Average
8	2.61	34.64	-21.36	56.00	24.39	-0.11	10.36	QP
9	4.38	26.16	-19.84	46.00	15.90	-0.13	10.39	Average
10	4.38	33.96	-22.04	56.00	23.70	-0.13	10.39	QP
11	9.65	28.94	-31.06	60.00	18.62	-0.13	10.45	QP
12	9.65	22.24	-27.76	50.00	11.92	-0.13	10.45	Average

## 3.2. Test of Radiated Emission Measurement

### 3.2.1. Limit of Radiated Emission

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3


### 3.2.2. Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3. Test Procedures

1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the quasi-peak method and reported
8. Emission level (dBuV/m) = 20 log Emission level (uV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


### 3.2.4. Test Setup of Radiated Emission

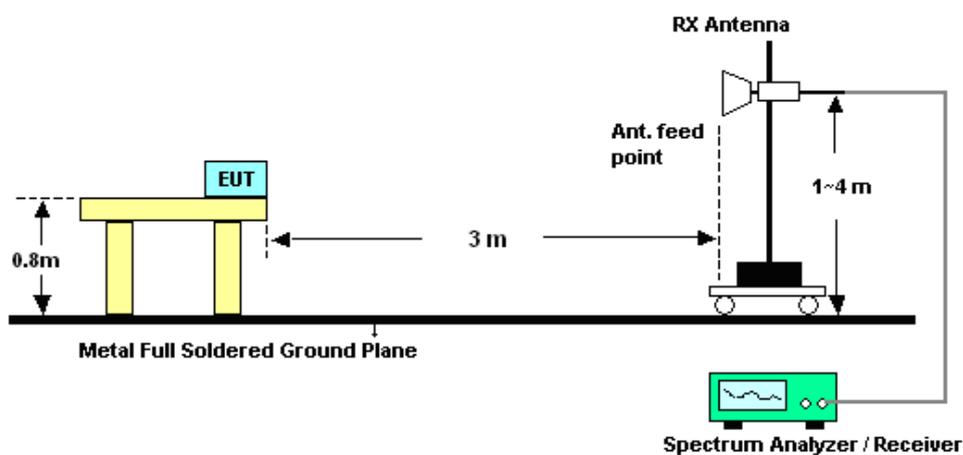



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 1	Temperature :	20~21°C
Test Engineer :	Xin Peng	Relative Humidity :	42~43%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	WLAN Link + TC + RJ11 + LAN Link + Adapter 1		

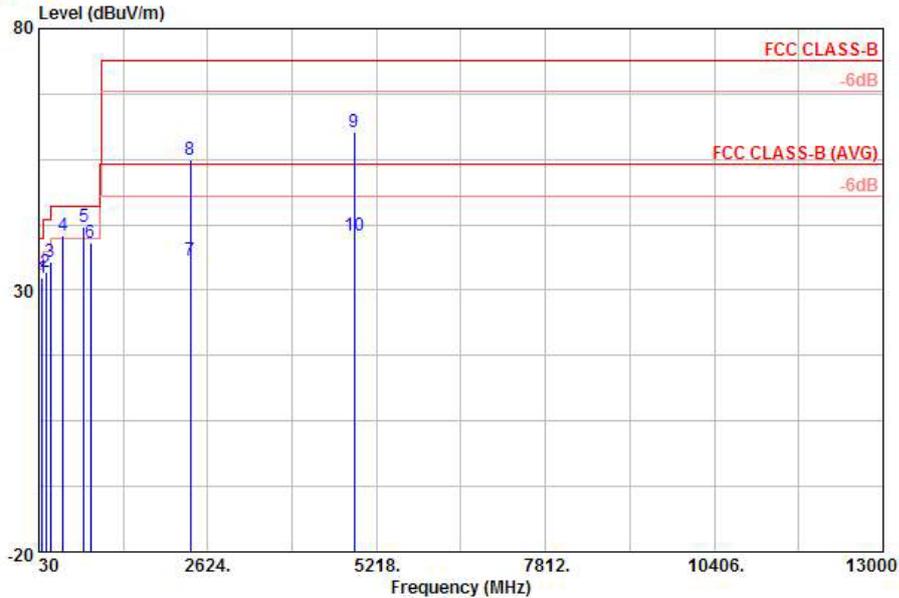


Site : 03CH01-KS  
 Condition: FCC CLASS-B 3m LF\_ANT\_100803 HORIZONTAL

Mode : Mode 1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	
1	81.57	32.29	-7.71	40.00	55.11	6.87	0.35	30.04	---	Peak
2	141.24	33.42	-10.08	43.50	52.20	10.73	0.49	30.00	---	Peak
3	211.98	35.40	-8.10	43.50	55.18	9.60	0.61	29.99	---	Peak
4 !	400.10	40.53	-5.47	46.00	53.52	16.00	0.84	29.83	---	Peak
5 !	717.20	42.09	-3.91	46.00	51.14	19.48	1.14	29.67	100	0 Peak
6	819.40	38.96	-7.04	46.00	47.23	20.08	1.26	29.61	---	Peak
7	2354.00	35.71	-18.29	54.00	33.50	32.81	3.38	33.98	100	302 Average
8	2356.00	54.95	-19.05	74.00	52.74	32.81	3.38	33.98	100	302 Peak
9	4874.00	60.35	-13.65	74.00	52.46	35.18	4.98	32.27	100	0 Peak
10	4874.30	40.50	-13.50	54.00	32.61	35.18	4.98	32.27	100	316 Average



Test Mode :	Mode 1	Temperature :	20~21°C
Test Engineer :	Xin Peng	Relative Humidity :	42~43%
Test Distance :	3m	Polarization :	Vertical
Function Type :	WLAN Link + TC + RJ11 + LAN Link + Adapter 1		

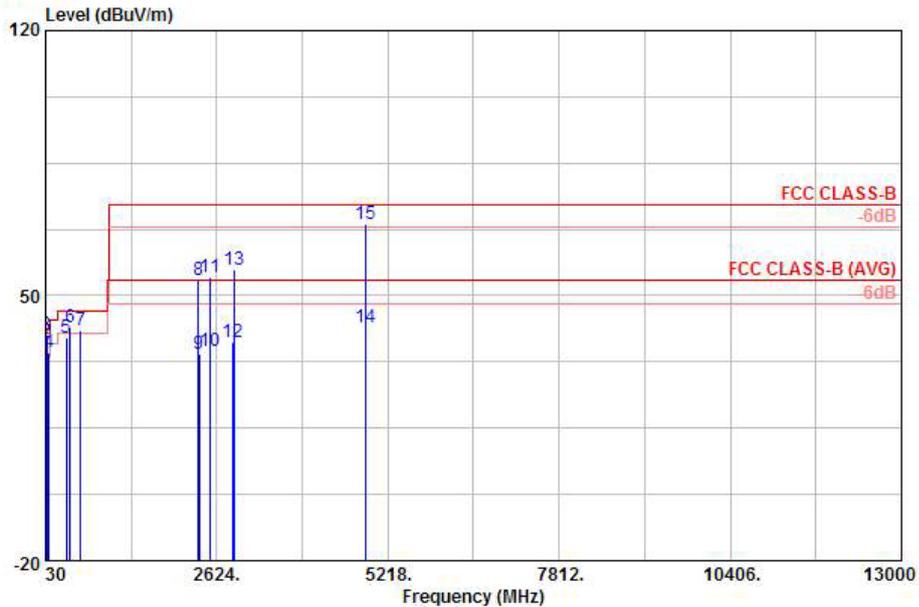

Site : 03CH01-KS  
 Condition: FCC CLASS-B 3m LF\_ANT\_100803 VERTICAL

Mode : Mode 1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	31.35	33.86	-6.14	40.00	46.40	17.29	0.25	30.08	100	0 QP
2 !	39.45	37.63	-2.37	40.00	55.10	12.30	0.25	30.02	100	0 QP
3 !	52.41	39.66	-0.34	40.00	62.49	7.01	0.29	30.13	100	30 QP
4 !	81.03	35.09	-4.91	40.00	57.91	6.87	0.35	30.04	100	330 QP
5	349.70	38.84	-7.16	46.00	53.46	14.50	0.82	29.94	---	--- Peak
6 !	400.10	41.71	-4.29	46.00	54.70	16.00	0.84	29.83	100	0 Peak
7 !	563.20	40.65	-5.35	46.00	50.78	18.52	1.02	29.67	---	--- Peak
8	2350.00	54.09	-19.91	74.00	51.92	32.78	3.33	33.94	100	360 Peak
9	2354.00	34.47	-19.53	54.00	32.26	32.81	3.38	33.98	100	244 Average
10	2515.30	35.57	-18.43	54.00	32.98	33.08	3.73	34.22	100	188 Average
11	2518.00	54.81	-19.19	74.00	52.22	33.08	3.73	34.22	100	360 Peak
12	2876.30	37.79	-16.21	54.00	34.60	33.58	3.88	34.27	100	193 Average
13	2878.00	56.85	-17.15	74.00	53.66	33.58	3.88	34.27	100	360 Peak
14	4873.90	41.70	-12.30	54.00	33.81	35.18	4.98	32.27	100	157 Average
15 !	4876.00	68.97	-5.03	74.00	61.08	35.18	4.98	32.27	100	360 Peak

### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 16, 2010	Nov. 15, 2011	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Jan. 07, 2010	Jan. 06, 2012	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 07, 2010	Dec. 06, 2011	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1MHz~18GHz	Jan. 07, 2010	Jan. 06, 2012	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060004	30MHz~2GHz	Dec. 09, 2010	Dec. 08, 2011	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Jan. 07, 2010	Jan. 06, 2012	Radiation (03CH01-KS)
Actice hore antenna	com-power	AHA-118	701023	1G-18GHz	Nov. 09, 2010	Nov. 08, 2011	Radiation (03CH01-KS)
Signal Generator	R&S	SMR40	100455	10G-40GHz	Jan. 06, 2010	Jan. 05, 2012	Radiation (03CH01-KS)
SHE-EHF Horn	Schwarzbeck	BBHA9170	BBHA170249	15-40GHz	Oct. 15,2010	Oct. 14,2011	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/00	9G-30GHz	Jul. 29, 2010	Jul. 28, 2011	Radiation (03CH01-KS)
Bluetooth Base Station	R&S	CBT	100783	N/A	Aug. 17, 2010	Aug. 16, 2011	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz	Jun. 24, 2010	Jun. 23, 2011	Radiation (05CH01-KS)
Bilog Antenna	SCHAFFNER	CBL611D	23183	25MHz~2GHz	Dec. 07, 2010	Dec. 06, 2011	Radiation (05CH01-KS)
DRG	ETS-Lindgren	3117	00075957	1GHz~18GHz	Dec. 07, 2010	Dec. 06, 2011	Radiation (05CH01-KS)
Amplifier	Wireless	FPA6592G	060007	30MHz~2GHz	Nov. 12, 2010	Nov. 11, 2011	Radiation (05CH01-KS)
Amplifier	Agilent	8449B	3008A02371	1GHz~26.5GHz	Dec. 07, 2010	Dec. 06, 2011	Radiation (05CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 22, 2010	Jun. 21 2011	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Jan. 07, 2011	Jan. 06, 2012	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Jan. 07, 2011	Jan. 06, 2012	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	N/A	Nov. 10, 2010	Nov. 09, 2011	Conduction (CO01-KS)

## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
<b>Combined Standard Uncertainty <math>Uc(y)</math></b>	<b>1.13</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2Uc(y)</math>)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>Uc(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2Uc(y)</math>)</b>	<b>2.54</b>		

**Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)**

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>4.72</b>				



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP141234 as below.