



## FCC&IC SAR Compliance Test Report

Project Name: Mobile WiFi  
Model : HW-02E  
FCC ID : QISHW-02E  
Report No. : SYBH(Z-SAR) 005122012-2

	APPROVED	CHECKED	PREPARED
BY	<i>Liu Chunlin</i>	<i>Aluicway</i>	<i>Li wei</i>
DATE	2012-12-25	2012-12-25	2012-12-25

The test results of this test report relate exclusively to the item(s) tested , The HUAWEI does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of HUAWEI.

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

## Table of Contents

1	General Information.....	4
1.1	Statement of Compliance .....	4
1.2	RF exposure limits.....	4
1.3	EUT Description .....	5
1.3.1	General Description .....	6
1.4	Test specification(s).....	7
1.5	Testing laboratory.....	7
1.6	Applicant and Manufacturer .....	7
1.7	Application details.....	7
1.8	Ambient Condition .....	7
2	SAR Measurement System.....	8
2.1	SAR Measurement Set-up .....	8
2.2	Test environment.....	9
2.3	Data Acquisition Electronics description .....	9
2.4	Probe description.....	10
2.5	Phantom description.....	11
2.6	Device holder description .....	11
2.7	Test Equipment List.....	12
3	SAR Measurement Procedure .....	13
3.1	Scanning procedure .....	13
3.2	Spatial Peak SAR Evaluation .....	14
3.3	Data Storage and Evaluation .....	15
4	System Verification Procedure .....	17
4.1	Tissue Verification .....	17
4.2	System Check .....	18
4.3	System check Procedure.....	19
5	Measurement Uncertainty Evaluation .....	20
5.1	Measurement uncertainty evaluation for SAR test.....	20
5.2	Measurement uncertainty evaluation for system system .....	21
6	SAR Test Configuration.....	22
6.1	GSM Test Configuration.....	22
6.2	UMTS Test Configuration.....	23
6.3	WiFi Test Configuration .....	28
7	SAR Measurement Results .....	29
7.1	Conducted power measurements .....	29
7.1.1	Conducted power measurements GSM850 .....	30
7.1.2	Conducted power measurements GSM1900 .....	30
7.1.3	Conducted power measurements UMTS Band V .....	31
7.1.4	Conducted power measurements WiFi 2.4G .....	32
7.2	SAR measurement Result.....	34
7.2.1	SAR measurement Result of GSM850.....	34
7.2.2	SAR measurement Result of GSM1900.....	35
7.2.3	SAR measurement Result of UMTS Band V .....	36
7.3	Multiple Transmitter Evaluation .....	37
7.3.1	SAR measurement positions .....	37
7.3.2	Simultaneous Transmission Possibilities.....	38
7.3.3	Stand-alone SAR test exclusion .....	38
7.3.4	Simultaneous SAR evaluation .....	40
	Appendix A. System Check Plots.....	42
	Appendix B. SAR Measurement Plots.....	42
	Appendix C. Calibration Certificate .....	42
	Appendix D. Photo documentation.....	42

**※ ※ Modified History ※ ※**

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2012-12-25	Liwei

# 1 General Information

## 1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for HW-02E is as below Table 1.

Band	Position	MAX Reported or Estimated SAR <sub>1g</sub> (W/kg)
GSM850	Rear Side	1.086
GSM1900	Front Side	<b>1.144</b>
UMTS Band V	Front Side	0.887
WiFi 2.4G	/	0.370
The highest simultaneous SAR is 1.514 W/kg		

Table 1: Summary of test result

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits of 1.6 W/Kg as averaged over any 1 g tissue according to the FCC rule §2.1093, the ANSI/IEEE C 95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2003& IEEE Std 1528a-2005 and FCC OET Bulletin 65 Supplement C Edition 01-01 .

## 1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
<b>Spatial Peak SAR*</b> (Brain/Body/Arms/Legs)	<b>1.60 mW/g</b>	8.00 mW/g
<b>Spatial Average SAR**</b> (Whole Body)	0.08 mW/g	0.40 mW/g
<b>Spatial Peak SAR***</b> (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

### Notes:

\* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

\*\* The Spatial Average value of the SAR averaged over the whole body.

\*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.

### 1.3 EUT Description

Device Information:			
DUT Name:	Mobile WiFi		
Type Identification:	HW-02E		
FCC ID:	QISHW-02E		
SN No.:	Z2M01A92B2800060		
Device Type :	portable device		
Exposure Category:	uncontrolled environment / general population		
Hardware Version :	CL1E5371SM		
Software Version :	21.100.00.09.736		
Antenna Type :	internal antenna		
Battery Options :	1#:SN-YRCC9129000K0703 2#:SN-YAIC920X20100698	Huawei Technologies Co., Ltd. Rechargeable Li-ion Battery Model: HB5F2H Rated capacity: 1780mAh Nominal Voltage:  +3.7V Charging Voltage:  +4.2V	
Device Operating Configurations:			
Supporting Mode(s)	GSM850/1900,UMTS Band V(Tested),WiFi 2.4G;		
Test Modulation	GSM(GMSK), UMTS(QPSK),		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band V	824-849	869-894
	WiFi 2.4G	2412-2462	2412-2462
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
HSDPA UE Category	10		
HSUPA UE category	6		
DC-HSDPA UE Category	24		
Power Class:	4, tested with power level 5(GSM850)		
	1, tested with power level 0(GSM1900)		
	3, tested with power control "all 1"(UMTS Band V)		
Test Channels (low-mid-high):	128-190-251(GSM850)		
	512-661-810 (GSM1900)		
	4132-4182-4233(UMTS Band V)		
	1-6-11(WiFi 802.11b/g, 802.11n 20M)		
	3-6-9( WiFi 802.11n 40M)		

Table 3: Device information and operating configuration

### 1.3.1 General Description

HW-02E is a LTE/UMTS/ EDGE triple mode and WiFi Wireless mobile Router; it can be used as a WiFi hotspot based on standard of IEEE802.11b/g/n, max to 10 WiFi stations can be associating with HW-02E simultaneously. About 3G WCDMA wireless mode, it supports WCDMA and HSDPA/HSUPA/HSPA+/DC-HSDPA, operating in Band5. About 2G GSM, operating in GSM850MHz and GSM1900MHz. The WiFi frequency is 2.4GHz.

HW-02E supports 1Tx2Rx for 3G WCDMA, WiFi supports 2Tx2Rx.

#### 1.4 Test specification(s)

ANSI Std C95.1 – 1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.( IEEE Std C95.1 – 1991)
IEEE Std 1528-2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE Std 1528a-2005	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)
OET Bulletin No. 65, Supplement C Edition 01-01– 2001	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields---Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 4 of March 2010)
KDB248227 D01v01	SAR Measurement Procedures for 802.11 a,b,g Transmitters
KDB941225 D01v02	SAR test for 3G devices
KDB941225 D03v01	SAR Test Reduction GSM/GPRS/EDGE
KDB447498 D01v05	General RF Exposure Guidance
KDB450824 D01v01	SAR Probe Calibration and System Verification
KDB450824 D02v01	Dipole SAR System check Verification
TCB workshop slides	RF Exposure Procedures(October 10, 2012)

#### 1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Zone K3,Huawei Industrial Base, Bantian Industry Area, Longgang District, Shenzhen, Guangdong, China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 ; A2LA Registration number: 2174.01

#### 1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

#### 1.7 Application details


Start Date of test	2012-12-08
End Date of test	2012-12-11

#### 1.8 Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

## 2 SAR Measurement System

### 2.1 SAR Measurement Set-up

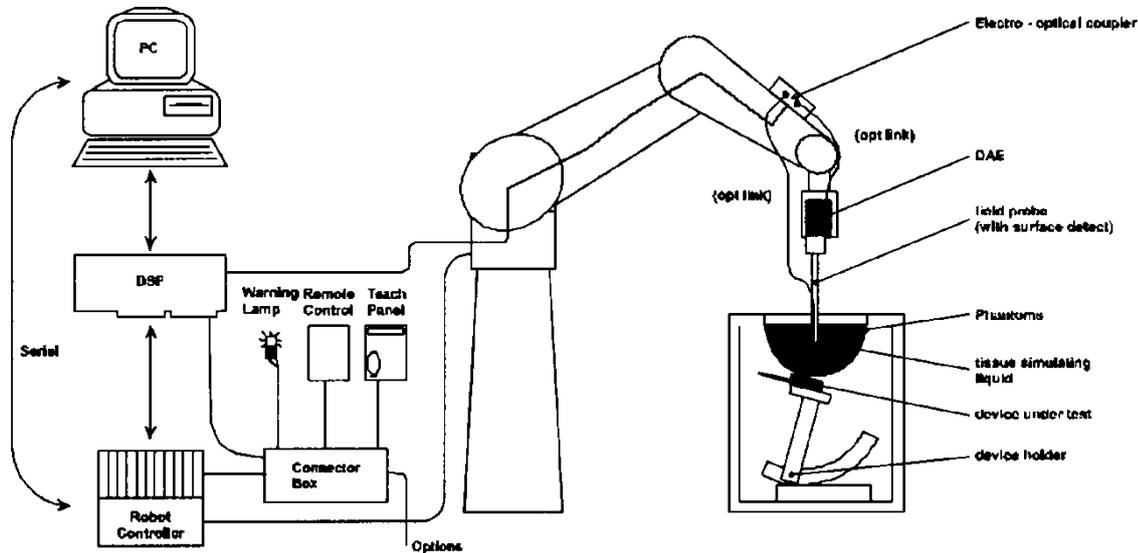

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows XP.
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

## 2.2 Test environment

The DASY4 measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m<sup>3</sup>, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m<sup>2</sup> array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.

The system allows the measurement of SAR values larger than 0.005 mW/g.

## 2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.


### DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	

### 2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor ( $\pm 2$  dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

#### Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

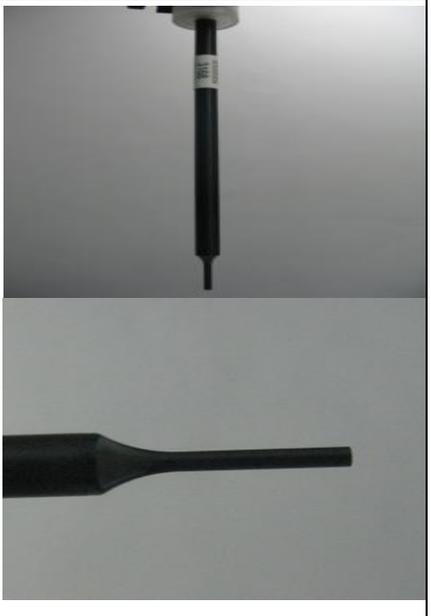Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)	
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.3$ dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

#### Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 6 GHz (dosimetry); Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)	
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in HSL (rotation normal to probe axis)	
Dynamic range	10 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB	
Dimensions	Overall length: 337 mm Tip length: 20 mm Body diameter: 12 mm Tip diameter: 2.5 mm Distance from probe tip to dipole centers: 1.0 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

## 2.5 Phantom description

### SAM Twin Phantom

Shell Thickness	2mm +/- 0.2 mm; The ear region: 6mm	
Filling Volume	Approximately 30 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

### ELI4 Phantom

Shell Thickness	2mm +/- 0.2 mm	
Filling Volume	Approximately 30 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Flat phantom	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

## 2.6 Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

## 2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment  
Devices used during the test described are marked

	Manufacturer	Device	Type	Serial number	Date of last calibration )*
<input type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3736	2012-04-26
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	ES3DV3	3168	2012-10-02
<input checked="" type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d126	2011-11-07
<input type="checkbox"/>	SPEAG	1800 MHz Dipole	D1800V2	2d184	2011-03-08
<input checked="" type="checkbox"/>	SPEAG	1900 MHz Dipole	D1900V2	5d143	2011-09-26
<input type="checkbox"/>	SPEAG	2000 MHz Dipole	D2000V2	1052	2011-03-10
<input type="checkbox"/>	SPEAG	2300 MHz Dipole	D2300V2	1016	2011-11-22
<input type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	860	2011-03-08
<input type="checkbox"/>	SPEAG	2600 MHz Dipole	D2600V2	1021	2011-11-21
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	851	2012-07-25
<input checked="" type="checkbox"/>	SPEAG	Software	DASY 5	N/A	N/A
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM1	TP-1475	N/A
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM2	TP-1474	N/A
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM3	TP-1597	N/A
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM4	TP-1620	N/A
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1038	N/A
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1111	N/A
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	113989	2012-06-07
<input type="checkbox"/>	R & S	WideBand Radio Communication Tester	CMW 500	392718	2012-08-06
<input checked="" type="checkbox"/>	Agilent)*	Network Analyser	E5071B	MY42404956	2012-02-14
<input checked="" type="checkbox"/>	Agilent	Dielectric Probe Kit	85070E	2484	N/A
<input checked="" type="checkbox"/>	Agilent	Signal Generator	N5181A	MY47420989	2012-02-14
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA0746001	N/A
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4417A	MY45101339	2012-02-14
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY44420359	2012-02-14

Note: All the test equipments are calibrated once a year, except the dipoles, which are calibrated every three years. Moreover, we have self-calibration every year to the dipoles.

- 1) Per KDB 450824 D02 requirements for dipole calibration, Huawei SAR lab has adopted three years calibration interval. But each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
  - a) There is no physical damage on the dipole;
  - b) System check with specific dipole is within 10% of calibrated value;
  - c) Return-loss is within 10% of calibrated measurement;
  - d) Impedance is within 5Ω from the previous measurement.
- 2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

## 3 SAR Measurement Procedure

### 3.1 Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The reference and drift measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. +/- 5 %.
- The surface check measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)
- The area scan measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension. If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A 7x7x7 zoom scan measures the field in a volume around the 2D peak SAR value acquired in the previous coarse scan. This is a fine 7x7 grid where the robot additionally moves the probe in 7 steps along the z-axis away from the bottom of the Phantom. Grid spacing for the cube measurement is 5 mm in x and y-direction and 5 mm in z-direction. DASY5 is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

### 3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 7 x 7 x 7 points. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting Graph Evaluated.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

#### Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

#### Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff ].

#### Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

#### Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

### 3.3 Data Storage and Evaluation

#### Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension DAE4. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with	V <sub>i</sub>	= compensated signal of channel i	(i = x, y, z)
	U <sub>i</sub>	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field (DASY parameter)	
	dcp <sub>i</sub>	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$$

with  $V_i$  = compensated signal of channel i (i = x, y, z)  
 $Norm_i$  = sensor sensitivity of channel i (i = x, y, z)  
 [mV/(V/m)<sup>2</sup>] for E-field Probes  
 $ConvF$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with  $SAR$  = local specific absorption rate in mW/g  
 $E_{tot}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  $P_{pwe}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>  
 $E_{tot}$  = total electric field strength in V/m  
 $H_{tot}$  = total magnetic field strength in A/m

## 4 System Verification Procedure

### 4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine of the dielectric parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Body Tissue					
	450	835	1800	1900	2450	2600
Frequency Band (MHz)	450	835	1800	1900	2450	2600
Water	51.16	52.4	69.91	71.88	73.2	70.04
Salt (NaCl)	1.49	1.40	0.13	0.39	0.04	0.1
Sugar	46.78	45.0	0.0	0.0	0.0	0.0
HEC	0.52	1.0	0.0	0.0	0.0	0.0
Bactericide	0.05	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.44	26.7	29.5

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M $\Omega$ + resistivity  
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]  
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		$\epsilon_r$ (+/-5%)	$\sigma$ (S/m) (+/-5%)	$\epsilon_r$	$\sigma$ (S/m)		
835B	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	55.79	0.993	21.4°C	2012-12-08
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	55.67	0.989		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	55.46	1.014		
1900B	1850	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.87	1.479	21.4°C	2012-12-10
	1880	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.94	1.520		
	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.68	1.536		
	1910	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.65	1.550		

$\epsilon_r$ = Relative permittivity,  $\sigma$ = Conductivity

Table 5: Measured Tissue Parameter

- Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2) KDB 450824 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

#### 4.2 System Check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests (Graphic Plot(s) see Appendix A).


System Check	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)		
D835V2 Body	9.54 (8.59~10.49)	6.29 (5.66~6.92)	10.04	6.64	21.4°C	2012-12-08
D1900V2 Body	41.40 (37.26~45.54)	21.80 (19.62~23.98)	42.00	21.72	21.4°C	2012-12-10

Table 6: System Check Results

### 4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

system check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

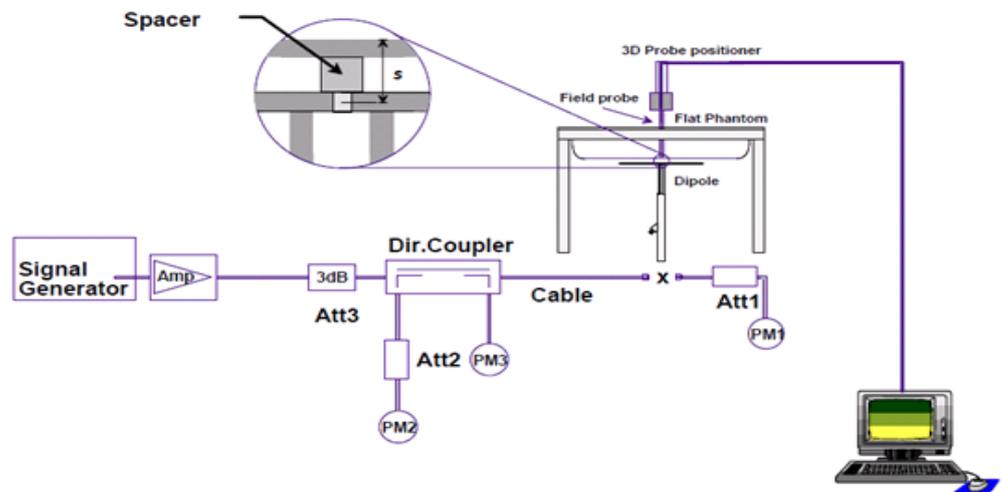

## 5 Measurement Uncertainty Evaluation

### 5.1 Measurement uncertainty evaluation for SAR test

The overall combined measurement uncertainty of the measurement system is  $\pm 10.9\%$  ( $K=1$ ).

The expanded uncertainty ( $k=2$ ) is assessed to be  $\pm 21.9\%$

This measurement uncertainty budget is suggested by IEEE P1528 and determined by Schmid & Partner Engineering AG. The breakdown of the individual uncertainties is as follows:

Error Sources	Uncertainty Value	Probability Distribution	Divisor	$c_i$ 1g	$c_i$ 10g	Standard Uncertainty 1g	Standard Uncertainty 10g	$v_i^2$ or $v_{eff}$
<b>Measurement System</b>								
Probe calibration	$\pm 6.0\%$	Normal	1	1	1	$\pm 6.0\%$	$\pm 6.0\%$	$\infty$
Axial isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9\%$	$\pm 1.9\%$	$\infty$
Hemispherical isotropy	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9\%$	$\pm 3.9\%$	$\infty$
Spatial resolution	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	$\infty$
Boundary effects	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	$\infty$
Probe linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	$\infty$
System detection limits	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	$\infty$
Readout electronics	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	$\infty$
Response time	$\pm 0.8\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$	$\infty$
Integration time	$\pm 2.6\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5\%$	$\pm 1.5\%$	$\infty$
RF ambient conditions	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	$\infty$
Probe positioner	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$	$\infty$
Probe positioning	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	$\infty$
Max. SAR evaluation	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	$\infty$
<b>Test Sample Related</b>								
Device positioning	$\pm 2.9\%$	Normal	1	1	1	$\pm 2.9\%$	$\pm 2.9\%$	145
Device holder uncertainty	$\pm 3.6\%$	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	5
Power drift	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	$\infty$
<b>Phantom and Set-up</b>								
Phantom uncertainty	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	$\infty$
Liquid conductivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	$\infty$
Liquid conductivity (meas.)	$\pm 2.5\%$	Normal	1	0.64	0.43	$\pm 1.6\%$	$\pm 1.1\%$	$\infty$
Liquid permittivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	$\infty$
Liquid permittivity (meas.)	$\pm 2.5\%$	Normal	1	0.6	0.49	$\pm 1.5\%$	$\pm 1.2\%$	$\infty$
<b>Combined Uncertainty</b>	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					$\pm 10.9\%$	$\pm 10.7\%$	387
<b>Expanded Std. Uncertainty</b>	$U_e = 2u_c$	Normal		<b>K=2</b>		$\pm 21.9\%$	$\pm 21.4\%$	

Table 7: Measurement uncertainties

### 5.2 Measurement uncertainty evaluation for system system

The overall combined measurement uncertainty of the measurement system is  $\pm 9.5\%$  ( $K=1$ ).

The expanded uncertainty ( $k=2$ ) is assessed to be  $\pm 18.9\%$

This measurement uncertainty budget is suggested by IEEE P1528 and determined by Schmid & Partner Engineering AG. The breakdown of the individual uncertainties is as follows:

Error Sources	Uncertainty Value	Probability Distribution	Divisor	$c_i$ 1g	$c_i$ 10g	Standard Uncertainty 1g	Standard Uncertainty 10g	$v_i^2$ or $v_{eff}$
<b>Measurement System</b>								
Probe calibration	$\pm 6.0\%$	Normal	1	1	1	$\pm 6.0\%$	$\pm 6.0\%$	$\infty$
Axial isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	$\infty$
Hemispherical isotropy	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 0.0\%$	$\pm 0.0\%$	$\infty$
Boundary effects	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	$\infty$
Probe linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	$\infty$
System detection limits	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	$\infty$
Readout electronics	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	$\infty$
Response time	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	$\infty$
Integration time	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	$\infty$
RF ambient conditions	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	$\infty$
Probe positioner	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$	$\infty$
Probe positioning	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	$\infty$
Max. SAR evaluation	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	$\infty$
<b>Dipole</b>								
Deviation of experimental dipole	$\pm 5.5\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 3.2\%$	$\pm 3.2\%$	$\infty$
Dipole axis to liquid distance	$\pm 2.0\%$	Rectangular	1	1	1	$\pm 1.2\%$	$\pm 1.2\%$	$\infty$
Power drift	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	$\infty$
<b>Phantom and Set-up</b>								
Phantom uncertainty	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	$\infty$
Liquid conductivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	$\infty$
Liquid conductivity (meas.)	$\pm 2.5\%$	Normal	1	0.64	0.43	$\pm 1.6\%$	$\pm 1.1\%$	$\infty$
Liquid permittivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	$\infty$
Liquid permittivity (meas.)	$\pm 2.5\%$	Normal	1	0.6	0.49	$\pm 1.5\%$	$\pm 1.2\%$	$\infty$
<b>Combined Uncertainty</b>	$u_c = \sqrt{\sum_{i=1}^{21} u_i^2}$					<b><math>\pm 9.5\%</math></b>	<b><math>\pm 9.2\%</math></b>	
<b>Expanded Std. Uncertainty</b>	$u_e = 2u_c$	Normal	<b>K=2</b>			<b><math>\pm 18.9\%</math></b>	<b><math>\pm 18.4\%</math></b>	

Table 8: Measurement uncertainties

## 6 SAR Test Configuration

### 6.1 GSM Test Configuration

SAR tests for GSM850/1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to “5”and “0” in SAR of GSM850 and GSM1900.The tests in the band of GSM850/1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot.

The allowed power reduction in the multi-slot configuration is as following:

Number of timeslots in uplink assignment		Reduction of maximum output power, (dB)		
Band	Time Slots	GPRS (GMSK)	EGPRS (GMSK)	EGPRS (8PSK )
GSM850	1 TX slot	0	0	0
	2 TX slots	1.5	1.5	2
	3 TX slots	3.5	3.5	4
	4 TX slots	5.5	5.5	6
GSM1900	1 TX slot	0	0	0
	2 TX slots	2	2	2
	3 TX slots	4.5	4.5	4
	4 TX slots	6	6	6

Table 9: The allowed power reduction in the multi-slot configuration of GSM

## 6.2 UMTS Test Configuration

### 1) RMC

As the SAR body tests for UMTS Band V, we established the radio link through call processing. The maximum output power were verified on high, middle and low channels for each test band according to 3GPP TS 34.121 with the following configuration:

- 1) 12.2kbps RMC, 64,144,384 kbps RMC with TPC set to 'all 1'.
- 2) Test loop Mode 1.

For the output power, the configurations for the DPCCH and DPDCH<sub>1</sub> are as followed (EUT do not support the DPDCH<sub>2-n</sub>)

	Channel Bit Rate (kbps)	Channel Symbol Rate (ksps)	Spreading Factor	Spreading Code Number	Bits/Slot
DPCCH	15	15	256	0	10
DPDCH <sub>1</sub>	15	15	256	64	10
	30	30	128	32	20
	60	60	64	16	40
	120	120	32	8	80
	240	240	16	4	160
	480	480	8	2	320
	960	960	4	1	640
DPDCH <sub>n</sub>	960	960	4	1, 2, 3	640

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all "1s". SAR for other spreading codes and multiple DPDCH<sub>n</sub>, when supported by the EUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCH<sub>n</sub> configuration, are less than ¼ dB higher than those measured in 12.2 kbps RMC.

### 2) HSDPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The  $\beta_c$  and  $\beta_d$  gain factors for DPCCH and DPDCH were set according to the values in the below table,  $\beta_{hs}$  for HS-DPCCH is set automatically to the correct value when  $\Delta ACK, \Delta NACK, \Delta CQI = 8$ . The variation of the  $\beta_c / \beta_d$  ratio causes a power reduction at sub-tests 2 - 4.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c / \beta_d$	$\beta_{hs}$ (1)	CM(dB)(2)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta$  ACK,  $\Delta$  NACK and  $\Delta$  CQI = 8 .  $A_{hs} = \beta_{hs}/\beta_c = 30/15$  ,  $\beta_{hs} = 30/15 * \beta_c$

Note 2 : CM=1 for  $\beta_c/\beta_d= 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3 : For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$

Table 10: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 11: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800

13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 12:HSDPA UE category

3) HSUPA

Body SAR is also measured for HSPA when the maximum average outputs of each RF channel with HSPA active is at ¼ dB higher than that measured without HSPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-set 1 and QPSK for FRC and 12.2kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA should be configured according to the values indicated below as well as other applicable procedures described in the ‘WCDMA Handset’ and ‘Release 5 HSPA Data Device’ sections of 3G device.

Sub - test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ec}$ (S F)	$\beta_{ed}$ (code)	CM <sup>(2)</sup> (dB)	MP R <sub>x</sub> (dB)	AG <sup>(4)</sup> Index	E-TFC I
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/25	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	15/15 <sup>(4)</sup>	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta ACK, \Delta NACK$  and  $\Delta CQI = 8$ .  $A_{hs} = \beta_{hs}/\beta_c = 30/15$ .  $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference

Note 3 : For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$

Note 4 : For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$

Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g

Note 6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Table 13:Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).

Table 14: HSUPA UE category

#### 4) DC-HSDPA

In DC-HSDPA implementation of this device, the uplink parameters are the same as HSDPA. No additional channels and modulations (16 QAM, and 64 QAM) are supported in uplink. The difference is only in the downlink parameters, where two carriers are supported. HSDPA settings were used on uplink.

For Rel. 8 DC-HSDPA apply the four subtests from HSDPA Release 5 except use fixed reference channel H-Set 12 for DC-HSDPA. And we can apply the same SAR test exclusion criteria used for Rel. 6 HSPA for Rel. 7 HSPA+ and Rel. 8 DC-HSDPA. That is, if the HSPA, HSPA+, or the DC-HSDPA maximum output is not more than 0.25 dB higher than WCDMA, SAR measurement for those modes is not required.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

**Table E.5.0: Levels for HSDPA connection setup**

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 15: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

- 1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
- 2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

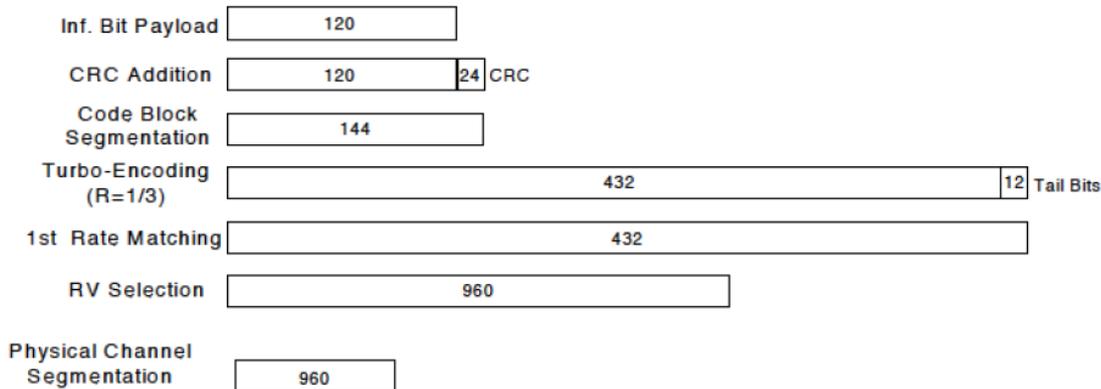


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test <sup>o</sup>	$\beta_c$ <sup>o</sup>	$\beta_d$ <sup>o</sup>	$\beta_d$ (SF) <sup>o</sup>	$\beta_c/\beta_d$ <sup>o</sup>	$\beta_{hs}(1)$ <sup>o</sup>	CM(dB)(2) <sup>o</sup>	MPR (dB) <sup>o</sup>
1 <sup>o</sup>	2/15 <sup>o</sup>	15/15 <sup>o</sup>	64 <sup>o</sup>	2/15 <sup>o</sup>	4/15 <sup>o</sup>	0.0 <sup>o</sup>	0 <sup>o</sup>
2 <sup>o</sup>	12/15(3) <sup>o</sup>	15/15(3) <sup>o</sup>	64 <sup>o</sup>	12/15(3) <sup>o</sup>	24/15 <sup>o</sup>	1.0 <sup>o</sup>	0 <sup>o</sup>
3 <sup>o</sup>	15/15 <sup>o</sup>	8/15 <sup>o</sup>	64 <sup>o</sup>	15/8 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>
4 <sup>o</sup>	15/15 <sup>o</sup>	4/15 <sup>o</sup>	64 <sup>o</sup>	15/4 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>

Note 1:  $\Delta ACK$ ,  $\Delta NACK$  and  $\Delta CQI=8$   $A_{hs} = \beta_{hs}/\beta_c = 30/15$   $\beta_{hs} = 30/15 * \beta_c$   
 Note 2: CM=1 for  $\beta_c/\beta_d=12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.  
 Note 3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c=11/15$  and  $\beta_d=15/15$

Up commands are set continuously to set the UE to Max power.

Note:1.The Dual Carriers transmission only applies to HSDPA physical channels

- 2.The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4.The Dual Carriers operate in the same frequency band .
- 5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
- 6.The device doesn't support carrier aggregation for its release version is Release 8.

### 6.3 WiFi Test Configuration

For the 802.11b/g/n SAR tests, a communication link is set up with the test mode software for WiFi mode test. The Absolute Radio Frequency Channel Number(ARFCN) is allocated to 1 ,6 and 11 respectively in the case of 802.11b/g/n(20M) and 3 ,6 and 9 respectively in the case of 802.11n(40M).

During the test,at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate.

For WiFi SISO configuration, 802.11b/g/n operating modes of each antenna are tested independently according to the service requirements in each frquency band. 802.11b/g/n(20M) modes are tested on channel 1, 6, 11; however,if output power reduction is necessary for channels 1 and/or 11 to meet restricted band requirements the highest output channel closest to each of these channels must be tested instead.

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g/n
802.11b/g/n	2.4 GHz	2.412	1#	√	△
		2.437	6	√	△
		2.462	11#	√	△

Notes:  
 √ = "default test channels"  
 △ = possible 802.11g channels with maximum average output ¼ dB the "default test channels"  
 # = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

802.11 Test Channels per FCC Requirements

For WiFi MIMO Configuration, as the test software allows two WiFi antennas in the device to transmit simultaneously and continuously, the 802.11n 20M:2\*2 MIMO and 802.11n 40M:2\*2 MIMO are tested independently according to KDB248227. The 802.11n (20M) mode is tested on channel 1, 6, 11 and 802.11n(40M) mode is tested on channel 3, 6, 9.

Note: According to KDB248227 and the October 2012 TCB workshop RF exposure slides , testing at higher data rates and higher order modulations in 802.11g/n modes is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rates and lowest order modulation mode.

## 7 SAR Measurement Results

### 7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200 was used.

SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

Note: CMU200 measures GSM peak and average output power for active timeslots. For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

<b>No. of timeslots</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
timebased avg. power compared to slotted avg. power	-9.19dB	-6.13dB	-4.42dB	-3.18dB

The signalling modes differ as follows:

<b>mode</b>	<b>coding scheme</b>	<b>modulation</b>
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

**7.1.1 Conducted power measurements GSM850**

GSM850		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		128CH	190CH	251CH		128CH	190CH	251CH
GSM(CS)		32.36	<b>31.98</b>	31.77	-9.19	23.17	22.79	22.58
GPRS (GMSK)	1 Tx Slot	32.30	31.97	31.71	-9.19	23.11	22.78	22.52
	2 Tx Slots	30.29	30.04	29.78	-6.13	24.16	23.91	23.65
	3 Tx Slots	28.31	28.01	27.72	-4.42	23.89	23.59	23.30
	4 Tx Slots	26.37	26.08	25.74	-3.18	23.19	22.90	22.56
EDGE (GMSK)	1 Tx Slot	32.29	31.93	31.74	-9.19	23.10	22.74	22.55
	2 Tx Slots	30.25	30.07	29.72	-6.13	24.12	23.94	23.59
	3 Tx Slots	28.33	28.05	27.76	-4.42	23.91	23.63	23.34
	4 Tx Slots	26.34	26.02	25.71	-3.18	23.16	22.84	22.53
EDGE (8PSK)	1 Tx Slot	25.01	24.97	24.96	-9.19	15.82	15.78	15.77
	2 Tx Slots	22.99	22.92	22.83	-6.13	16.86	16.79	16.70
	3 Tx Slots	21.02	21.01	20.97	-4.42	16.60	16.59	16.55
	4 Tx Slots	18.91	18.92	18.82	-3.18	15.73	15.74	15.64

Table 16: Test results conducted power measurement GSM 850MHz

Note: 1. The conducted power of GSM850 is measured with RMS detector.

2. Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

**7.1.2 Conducted power measurements GSM1900**

GSM1900		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
GSM(CS)		28.69	28.71	27.76	-9.19	19.50	19.52	18.57
GPRS (GMSK)	1 Tx Slot	28.66	28.68	28.77	-9.19	19.47	19.49	19.58
	2 Tx Slots	26.71	26.77	26.86	-6.13	20.58	20.64	20.73
	3 Tx Slots	24.66	24.74	24.81	-4.42	20.24	20.32	20.39
	4 Tx Slots	22.64	22.72	22.82	-3.18	19.46	19.54	19.64
EDGE (GMSK)	1 Tx Slot	28.63	28.62	<b>28.79</b>	-9.19	19.44	19.43	19.60
	2 Tx Slots	26.75	26.74	26.81	-6.13	20.62	20.61	20.68
	3 Tx Slots	24.62	24.77	24.86	-4.42	20.20	20.35	20.44
	4 Tx Slots	22.61	22.73	22.84	-3.18	19.43	19.55	19.66
EDGE (8PSK)	1 Tx Slot	24.24	24.19	24.17	-9.19	15.05	15.00	14.98
	2 Tx Slots	21.96	21.88	21.93	-6.13	15.83	15.75	15.80
	3 Tx Slots	19.77	19.76	19.63	-4.42	15.35	15.34	15.21
	4 Tx Slots	17.70	17.66	17.63	-3.18	14.52	14.48	14.45

Table 17: Test results conducted power measurement GSM 1900MHz

Note: 1. The conducted power of GSM1900 is measured with RMS detector.

2. Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

**7.1.3 Conducted power measurements UMTS Band V**

UMTS Band V		Average Power (dBm)		
		4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	22.28	22.31	22.33
	64kbps RMC	22.27	22.32	<b>22.34</b>
	144kbps RMC	22.26	22.30	22.32
	384kbps RMC	22.26	22.31	22.32
HSDPA	Subtest 1	22.10	22.01	22.01
	Subtest 2	22.04	21.93	21.93
	Subtest 3	21.06	21.03	20.93
	Subtest 4	21.06	21.02	20.95
HSUPA	Subtest 1	20.97	21.32	20.79
	Subtest 2	19.99	20.01	19.99
	Subtest 3	19.92	19.94	19.92
	Subtest 4	19.81	19.76	19.60
	Subtest 5	20.95	20.97	20.75
DC-HSDPA	Subtest 1	22.06	22.03	21.96
	Subtest 2	21.99	21.97	21.92
	Subtest 3	21.08	21.04	20.96
	Subtest 4	21.05	21.02	20.94

Table 18: Test results conducted power measurement UMTS Band V

Note: The conducted power of UMTS Band V is measured with RMS detector.

**7.1.4 Conducted power measurements WiFi 2.4G**

Wi-Fi 2450MHz	Channel	Average Power (dBm) for Data Rates (Mbps)								
		1	2	5.5	11	/	/	/	/	
802.11b	Ant 1	1	7.98	8.02	8.06	8.06	/	/	/	/
		6	8.79	8.81	8.80	8.86	/	/	/	/
		11	7.28	7.31	7.32	7.36	/	/	/	/
	Ant 2	1	7.31	7.34	7.35	7.44	/	/	/	/
		6	8.36	8.39	8.44	8.49	/	/	/	/
		11	7.24	7.25	7.28	7.31	/	/	/	/
802.11g	Channel	6.00	9.00	12.00	18.00	24.00	36.00	48.00	54.00	
	Ant 1	1	8.21	8.24	8.26	8.23	8.19	8.16	8.22	8.18
		6	9.05	9.01	8.99	9.05	9.07	8.96	8.98	8.94
		11	7.75	7.72	7.79	7.75	7.71	7.79	7.81	7.82
	Ant2	1	7.69	7.68	7.71	7.75	7.67	7.72	7.76	7.74
		6	8.62	8.64	8.68	8.69	8.71	8.73	8.68	8.66
11		7.74	7.79	7.81	7.86	7.74	7.78	7.79	7.76	
802.11n 20M:1*1	Channel	6.50	13.00	19.50	26.00	39.00	52.00	58.50	65.00	
	Ant 1	1	8.02	8.08	8.09	8.01	8.05	8.11	8.13	8.15
		6	9.20	9.28	9.26	9.22	9.21	9.34	9.31	9.36
		11	7.71	7.75	7.73	7.79	7.82	7.79	7.84	7.85
	Ant 2	1	7.82	7.84	7.79	7.71	7.74	7.88	7.77	7.78
		6	8.80	8.86	8.81	8.84	8.91	8.93	8.89	8.92
11		7.86	7.81	7.88	7.83	7.79	7.79	7.81	7.79	
802.11n 20M:2*2	Channel	13.00	26.00	39.00	52.00	78.00	104.00	117.00	130.00	
	Ant 1	1	7.73	7.76	7.79	7.86	7.91	8.02	8.05	8.11
		6	8.71	8.73	8.79	8.75	8.71	8.76	8.81	8.83
		11	8.34	8.45	8.42	8.39	8.37	8.35	8.36	8.38
	Ant 2	1	8.31	8.35	8.39	8.34	8.36	8.29	8.32	8.37
		6	9.08	9.06	9.05	9.12	9.16	9.08	9.11	9.07
		11	7.75	7.71	7.76	7.71	7.79	7.87	7.81	7.86
	Ant sum	1	11.04	11.08	11.11	11.12	11.15	11.17	11.20	11.25
		6	11.91	11.91	11.93	11.95	11.95	11.93	11.97	11.96
11		11.07	11.11	11.11	11.07	11.05	11.03	11.06	11.09	
802.11n 40M:1*1	Channel	13.50	27.00	40.50	54.00	81.00	108.00	121.50	135.00	
	Ant 1	3(2422)	8.85	8.81	8.86	8.89	8.82	8.91	8.94	8.96
		6(2437)	8.94	8.99	8.92	8.97	8.96	8.89	8.94	8.99
		9(2452)	8.25	8.29	8.31	8.28	8.25	8.26	8.27	8.25
	Ant 2	3(2422)	8.75	8.71	8.79	8.76	8.81	8.83	8.75	8.75
		6(2437)	8.81	8.83	8.85	8.89	8.91	8.84	8.87	8.83

		9(2452)	8.05	8.04	8.06	8.07	8.01	7.99	8.06	8.08
		Channel	27.00	54.00	81.00	108.00	162.00	216.00	243.00	270.00
802.11n 40M:2*2	Ant 1	3(2422)	8.94	8.99	8.86	9.05	9.01	9.10	9.08	9.13
		6(2437)	9.05	9.08	9.01	9.06	8.99	8.94	8.96	8.97
		9(2452)	8.34	8.31	8.39	8.41	8.48	8.46	8.41	8.44
	Ant 2	3(2422)	9.18	9.19	9.13	9.16	9.12	9.15	9.18	9.14
		6(2437)	9.16	9.11	9.18	9.17	9.14	9.11	9.09	9.05
		9(2452)	8.61	8.68	8.62	8.69	8.62	8.59	8.56	8.55
	Ant sum	3(2422)	12.07	12.10	12.01	12.12	12.08	12.13	12.14	<b>12.15</b>
		6(2437)	12.12	12.11	12.11	12.13	12.08	12.04	12.04	12.02
		9(2452)	11.49	11.51	11.52	11.56	11.56	11.54	11.50	11.51

Table 19:Test results conducted power measurement WiFi and MIMO .

Note: The conducted power of WiFi and MIMO is measured with RMS detector.

## 7.2 SAR measurement Result

### 7.2.1 SAR measurement Result of GSM850

Test Position of Body with 10mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Liquid Temp.
			1-g	10-g					
<b>Test data with the battery 1#</b>									
Front Side	190/836.6	GPRS 1TS	0.476	0.340	0.010	31.97	33.0	0.603	21.4°C
Front Side	190/836.6	GPRS 2TS	0.579	0.414	-0.040	30.13	31.5	0.794	21.4°C
Front Side	190/836.6	GPRS 3TS	0.680	0.488	-0.130	28.01	29.5	0.958	21.4°C
	128/824.2		0.677	0.486	-0.110	28.31	29.5	0.890	21.4°C
	251/848.8		0.688	0.494	-0.150	27.72	29.5	1.037	21.4°C
Front Side	190/836.6	GPRS 4TS	0.555	0.399	-0.010	26.08	27.5	0.770	21.4°C
Rear Side	190/836.6	GPRS 3TS	0.712	0.499	-0.070	28.01	29.5	1.003	21.4°C
	128/824.2		0.709	0.497	-0.010	28.31	29.5	0.932	21.4°C
	251/848.8		0.721	0.505	0.050	27.72	29.5	<b>1.086</b>	21.4°C
Right Side	190/836.6	GPRS 3TS	0.122	0.064	0.060	28.01	29.5	0.172	21.4°C
Top Side	190/836.6	GPRS 3TS	0.317	0.223	-0.050	28.01	29.5	0.447	21.4°C
Bottom Side	190/836.6	GPRS 3TS	0.375	0.257	0.010	28.01	29.5	0.528	21.4°C
Rear Side	190/836.6	EDGE 1TS	0.436	0.307	0.180	31.93	33.0	0.558	21.4°C
Rear Side	190/836.6	EDGE 2TS	0.538	0.379	-0.060	30.07	31.5	0.748	21.4°C
Rear Side	190/836.6	EDGE 3TS	0.628	0.443	-0.110	28.05	29.5	0.877	21.4°C
	128/824.2		0.626	0.442	-0.010	28.33	29.5	0.820	21.4°C
	251/848.8		0.636	0.449	0.120	27.76	29.5	0.949	21.4°C
Rear Side	190/836.6	EDGE 4TS	0.517	0.365	-0.100	26.02	27.5	0.727	21.4°C
<b>Tested at worst position with the battery 2#</b>									
Rear Side	251/848.8	GPRS 3TS	0.647	0.458	-0.110	27.72	29.5	0.975	21.4°C

Table 20: Test results Body SAR GSM850

Note:

- 1) The maximum reported SAR value of each test band is shown in **bold** letters.
- 2) The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the reported SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.
- 3) The antenna-to-edge distance is greater than 2.5 cm, so the Left side does not need to be tested.

**7.2.2 SAR measurement Result of GSM1900**

Test Position of Body with 10mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with the battery 1#									
Front Side	661/1880	GPRS 1TS	0.390	0.218	-0.120	28.68	30.0	0.529	21.4°C
Front Side	661/1880	GPRS 2TS	0.766	0.427	-0.090	26.77	28.0	1.017	21.4°C
	810/1909.8		0.789	0.440	0.040	26.86	28.0	1.026	21.4°C
	512/1850.2		0.739	0.412	0.170	26.71	28.0	0.995	21.4°C
Front Side	810/1909.8	GPRS 3TS	0.976	0.540	-0.010	24.81	25.5	<b>1.144</b>	21.4°C
	810/1909.8*		0.967	0.537	-0.06	24.81	25.5	1.138	21.4°C
	661/1880		0.822	0.455	-0.120	24.74	25.5	0.979	21.4°C
	512/1850.2		0.661	0.364	0.000	24.66	25.5	0.802	21.4°C
Front Side	661/1880	GPRS 4TS	0.764	0.427	0.030	22.72	24.0	1.026	21.4°C
	810/1909.8		0.787	0.440	-0.020	22.82	24.0	1.033	21.4°C
	512/1850.2		0.737	0.412	0.140	22.64	24.0	1.008	21.4°C
Rear Side	661/1880	GPRS 3TS	0.524	0.322	-0.070	24.74	25.5	0.624	21.4°C
Right Side	661/1880	GPRS 3TS	0.788	0.405	0.080	24.74	25.5	0.939	21.4°C
	810/1909.8		0.811	0.417	-0.060	24.81	25.5	0.951	21.4°C
	512/1850.2		0.760	0.390	0.110	24.66	25.5	0.922	21.4°C
Top Side	661/1880	GPRS 3TS	0.323	0.190	-0.090	24.74	25.5	0.385	21.4°C
Bottom Side	661/1880		0.259	0.142	0.170	24.74	25.5	0.309	21.4°C
Front Side	661/1880	EDGE 1TS	0.385	0.216	0.000	28.62	30.0	0.529	21.4°C
Front Side	661/1880	EDGE 2TS	0.753	0.421	-0.020	26.74	28.0	1.006	21.4°C
	810/1909.8		0.775	0.434	0.050	26.81	28.0	1.019	21.4°C
	512/1850.2		0.726	0.406	-0.140	26.75	28.0	0.968	21.4°C
Front Side	661/1880	EDGE 3TS	0.731	0.410	-0.070	24.77	25.5	0.865	21.4°C
	810/1909.8		0.752	0.422	0.090	24.86	25.5	0.871	21.4°C
	512/1850.2		0.705	0.395	0.130	24.62	25.5	0.863	21.4°C
Front Side	661/1880	EDGE 4TS	0.768	0.431	-0.040	22.73	24.0	1.029	21.4°C
	810/1909.8		0.791	0.443	0.030	22.84	24.0	1.033	21.4°C
	512/1850.2		0.741	0.415	0.170	22.61	24.0	1.021	21.4°C
Tested at worst position with the battery 2#									
Front Side	810/1909.8	GPRS 3TS	0.912	0.511	-0.150	24.81	25.5	1.069	21.4°C

Table 21: Test results Body SAR GSM1900

Note:

- 1) The maximum reported SAR value of each test band is shown in **bold** letters.
- 2) The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the reported SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.
- 3) The antenna-to-edge distance is greater than 2.5 cm, so the Left side does not need to be tested.
- 4) \* - repeated at the highest SAR measurement according to the October 2012 TCB workshop RF exposure slides

**7.2.3 SAR measurement Result of UMTS Band V**

Test Position of Body with 10mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with the battery 1#									
Front Side	4182/836.4	RMC	0.633	0.437	0.010	22.31	23.7	0.872	21.4°C
	4233/846.6		0.647	0.446	-0.050	22.33	23.7	<b>0.887</b>	21.4°C
	4132/826.4		0.631	0.435	0.090	22.28	23.7	0.875	21.4°C
Rear Side	4182/836.4	RMC	0.602	0.408	-0.050	22.31	23.7	0.829	21.4°C
	4233/846.6		0.615	0.417	0.110	22.33	23.7	0.843	21.4°C
	4132/826.4		0.600	0.407	-0.150	22.28	23.7	0.832	21.4°C
Right Side	4182/836.4	RMC	0.193	0.106	-0.110	22.31	23.7	0.266	21.4°C
Top Side	4182/836.4	RMC	0.269	0.191	-0.040	22.31	23.7	0.370	21.4°C
Bottom Side	4182/836.4	RMC	0.260	0.177	0.070	22.31	23.7	0.358	21.4°C
Front Side	4233/846.6	HSDPA	0.622	0.430	-0.080	22.01	23.0	0.781	21.4°C
Front Side	4233/846.6	HSUPA	0.527	0.364	-0.070	20.75	22.0	0.703	21.4°C
Tested at worst position with the battery 2#									
Front Side	4233/846.6	RMC	0.634	0.440	0.010	22.33	23.7	0.869	21.4°C

Table 22: Test results Body SAR UMTS Band V

Note:


- 1) The maximum reported SAR value of each test band is shown in **bold** letters.
- 2) The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the reported SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.
- 3) The antenna-to-edge distance is greater than 2.5 cm, so the Left side does not need to be tested.
- 4) For the DC-HSDPA maximum output is not more than 0.25 dB higher than WCDMA, SAR measurement for DC-HSDPA is not required.

### 7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v05.

#### 7.3.1 SAR measurement positions

The location of the antennas inside the device is shown as below:

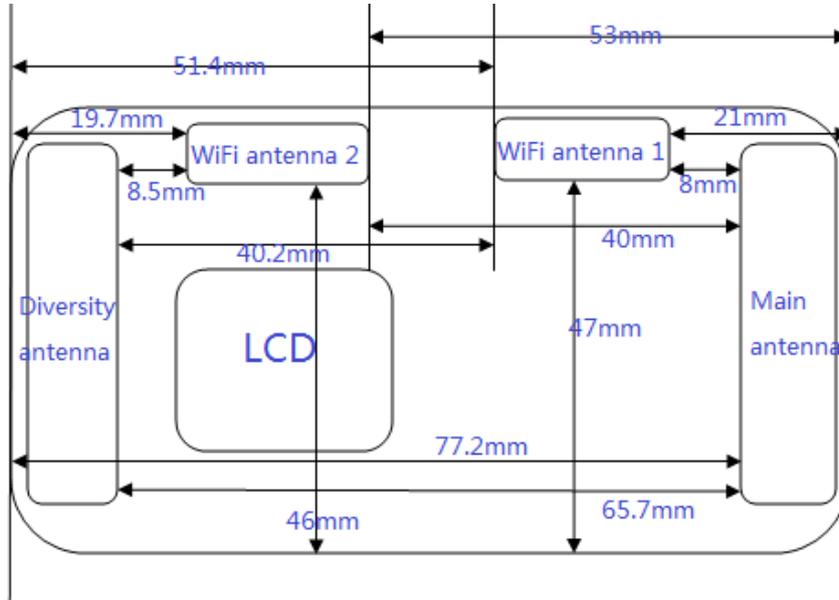

The SAR measurement positions of each band are as below

Mode	Front Side	Rear Side	Left Side	Right Side	Top Side	Bottom Side
GSM850	Yes	Yes	No	Yes	Yes	Yes
GSM1900	Yes	Yes	No	Yes	Yes	Yes
UMTS Band V	Yes	Yes	No	Yes	Yes	Yes
WiFi SISO with antenna1	/	/	/	/	/	/
WiFi SISO with antenna2	/	/	/	/	/	/
WiFi MIMO	/	/	/	/	/	/

Table 23: SAR measurement positions

Note:

- 1) When the antenna-to-edge distance is greater than 2.5 cm, the side does not need to be tested.
- 2) When standalone SAR test exclusion applies to an antenna, all the sides don't need to be tested.

### 7.3.2 Simultaneous Transmission Possibilities

The closest distance between WiFi antenna and main antenna is 8.0mm, and the Simultaneous Transmission Possibilities are as below:

Simultaneous Tx Combination	Configuration	Body SAR
1	GPRS/EGPRS + WiFi 2.4G SISO	Yes
2	UMTS + WiFi 2.4G SISO	Yes
4	GPRS/EGPRS + WiFi 2.4G MIMO	Yes
5	UMTS + WiFi 2.4G MIMO	Yes

Table 24: Simultaneous Transmission Possibilities

### 7.3.3 Stand-alone SAR test exclusion

The 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR, where:

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

The Stand-alone SAR test exclusion result of GSM&UMTS is as below:

Mode	$P_{\text{max}}$ (dBm)*	$P_{\text{max}}$ (mW)	Distance (mm)	f (GHz)	Calculation Result	Exclusion threshold	SAR test exclusion
GSM850	33.00	1995.26	10	0.850	183.95	3.00	No
GSM1900	30.00	1000.00	10	1.900	137.84	3.00	No
UMTS Band V	23.70	234.42	10	0.850	21.61	3.00	No

Table 25: Standalone SAR test exclusion of GSM&UMTS

Note: \* - maximum possible output power declared by manufacturer

The Stand-alone SAR test exclusion result of WiFi 2.4G is as below:

Mode	Antenna	P <sub>max</sub> (dBm)*	P <sub>max</sub> (mW)	Distance (mm)	f (GHz)	Calculation Result	Exclusion threshold	SAR test exclusion
802.11b	Ant 1	9.00	7.94	10	2.450	1.24	3.00	Yes
	Ant 2	9.00	7.94	10	2.450	1.24	3.00	Yes
802.11g	Ant 1	9.50	8.91	10	2.450	1.40	3.00	Yes
	Ant 2	9.50	8.91	10	2.450	1.40	3.00	Yes
802.11n 20M:1*1	Ant 1	9.50	8.91	10	2.450	1.40	3.00	Yes
	Ant 2	9.50	8.91	10	2.450	1.40	3.00	Yes
802.11n 20M:2*2	Ant sum	12.50	17.78	10	2.450	2.78	3.00	Yes
802.11n 40M:1*1	Ant 1	9.50	8.91	10	2.450	1.40	3.00	Yes
	Ant 2	9.50	8.91	10	2.450	1.40	3.00	Yes
802.11n 40M:2*2	Ant sum	12.50	17.78	10	2.450	2.78	3.00	Yes

Table 26: Standalone SAR test exclusion of WiFi & MIMO

Note: \* - maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] •

[ √ f(GHz)/x] W/kg for test separation distances ≤ 50 mm, where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

The estimated SAR calculation result of WiFi 2.4G is as below:

Mode	Antenna	P <sub>max</sub> (dBm)*	P <sub>max</sub> (mW)	Distance (mm)	f (GHz)	X	Estimated SAR (W/Kg)*
802.11b	Ant 1	9.00	7.94	10	2.450	7.5	0.17
	Ant 2	9.00	7.94	10	2.450	7.5	0.17
802.11g	Ant 1	9.50	8.91	10	2.450	7.5	0.19
	Ant 2	9.50	8.91	10	2.450	7.5	0.19
802.11n 20M:1*1	Ant 1	9.50	8.91	10	2.450	7.5	0.19
	Ant 2	9.50	8.91	10	2.450	7.5	0.19
802.11n 20M:2*2	Ant sum	12.50	17.78	10	2.450	7.5	<b>0.37</b>
802.11n 40M:1*1	Ant 1	9.50	8.91	10	2.450	7.5	0.19
	Ant 2	9.50	8.91	10	2.450	7.5	0.19
802.11n 40M:2*2	Ant sum	12.50	17.78	10	2.450	7.5	0.37

Table 27: The estimated SAR calculation result of WiFi 2.4G

Note:

- 1) \* - maximum possible output power declared by manufacturer
- 2) The max estimated SAR of all the WiFi & MIMO antennas and configurations is marked bold.
- 3) According to FCC KDB 447498D01 General RF Exposure Guidance v05, for conditions where the estimated SAR is overly conservative for certain conditions, the test lab may choose to perform standalone SAR measurements and use the measured SAR to determine simultaneous transmission SAR test exclusion.

### 7.3.4 Simultaneous SAR evaluation

For simultaneous transmission exclusion, both Wi-Fi antennas are considered in conjunction with the applicable main antenna in each transmission mode to determine simultaneous transmission SAR compliance for all combinations of simultaneous transmission:

Test Position		Reported SAR <sub>Max</sub> (W/kg)		Σ1-g SAR (W/kg)
		GSM&UMTS	WiFi SISO with antenna1	
Body SAR	Front side	1.144	0.190	<b>1.334</b>
	Rear side	1.086	0.190	1.276
	Left side	/	0.190	0.19
	Right side	0.951	0.190	1.141
	Top side	0.447	0.190	0.637
	Bottom side	0.528	0.190	0.718

Table 28: The Simultaneous SAR evaluation of GSM&UMTS and WiFi SISO with antenna1

Test Position		Reported SAR <sub>Max</sub> (W/kg)		Σ1-g SAR (W/kg)
		GSM&UMTS	WiFi SISO with antenna 2	
Body SAR	Front side	1.144	0.190	<b>1.334</b>
	Rear side	1.086	0.190	1.276
	Left side	/	0.190	0.19
	Right side	0.951	0.190	1.141
	Top side	0.447	0.190	0.637
	Bottom side	0.528	0.190	0.718

Table 29: The Simultaneous SAR evaluation of GSM&UMTS and WiFi SISO with antenna2

Test Position		Reported SAR <sub>Max</sub> (W/kg)		Σ1-g SAR (W/kg)
		GSM&UMTS	WiFi MIMO 20M	
Body SAR	Front side	1.144	0.370	<b>1.514</b>
	Rear side	1.086	0.370	1.456
	Left side	/	0.370	0.37
	Right side	0.951	0.370	1.321
	Top side	0.447	0.370	0.817
	Bottom side	0.528	0.370	0.898

Table 30: The Simultaneous SAR evaluation of GSM&UMTS and WiFi MIMO 20M

Test Position		Reported SAR <sub>Max</sub> (W/kg)		Σ1-g SAR (W/kg)
		GSM&UMTS	WiFi MIMO 40M	
Body SAR	Front side	1.144	0.370	<b>1.514</b>
	Rear side	1.086	0.370	1.456
	Left side	/	0.370	0.37
	Right side	0.951	0.370	1.321
	Top side	0.447	0.370	0.817
	Bottom side	0.528	0.370	0.898

Table 31: The Simultaneous SAR evaluation of GSM&amp;UMTS and WiFi MIMO 40M

**Conclusion:**

Simultaneous Transmission SAR evaluation is **not required** for GSM&UMTS and WiFi&MIMO, because the highest Σ1-g SAR of all combinations of simultaneous transmission is **1.514W/kg** < 1.6W/kg.

**Appendix A. System Check Plots**

**(Pls See Appendix A.)**

**Appendix B. SAR Measurement Plots**

**(Pls See Appendix B.)**

**Appendix C. Calibration Certificate**

**(Pls See Appendix C.)**

**Appendix D. Photo documentation**

**(Pls See Appendix D.)**

---

**End**