


FCC Test Report


FCC ID: QISHZ-W09

Project No. : 1602C122
Equipment : HUAWEI MateBook
Model Name : HZ-W09
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Feb. 26, 2016
Date of Test : Feb. 26, 2016 ~ Mar. 21, 2016
Issued Date : Mar. 22, 2016
Tested by : BTL Inc.

Testing Engineer : 
(Bill Zhang)

Technical Manager : 
(James Chiu)

Authorized Signatory : 
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Testing Laboratory
2640

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

| Table of Contents | Page |
|--|-------------|
| 1 . CERTIFICATION | 5 |
| 2 . SUMMARY OF TEST RESULTS | 6 |
| 2.1 TEST FACILITY | 7 |
| 2.2 MEASUREMENT UNCERTAINTY | 7 |
| 3 . GENERAL INFORMATION | 8 |
| 3.1 GENERAL DESCRIPTION OF EUT | 8 |
| 3.2 DESCRIPTION OF TEST MODES | 9 |
| 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 10 |
| 3.4 DESCRIPTION OF SUPPORT UNITS | 12 |
| 4 . EMC EMISSION TEST | 13 |
| 4.1 CONDUCTED EMISSION MEASUREMENT | 13 |
| 4.1.1 POWER LINE CONDUCTED EMISSION | 13 |
| 4.1.2 TEST PROCEDURE | 13 |
| 4.1.3 DEVIATION FROM TEST STANDARD | 13 |
| 4.1.4 TEST SETUP | 14 |
| 4.1.5 EUT OPERATING CONDITIONS | 14 |
| 4.1.6 TEST RESULTS | 14 |
| 4.2 RADIATED EMISSION MEASUREMENT | 15 |
| 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT | 15 |
| 4.2.2 TEST PROCEDURE | 16 |
| 4.2.3 DEVIATION FROM TEST STANDARD | 16 |
| 4.2.4 TEST SETUP | 17 |
| 4.2.5 EUT OPERATING CONDITIONS | 18 |
| 4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ) | 18 |
| 4.2.7 TEST RESULTS (ABOVE 1000 MHZ) | 18 |
| 5 . MEASUREMENT INSTRUMENTS LIST | 19 |
| ATTACHMENT A - CONDUCTED EMISSION | 20 |
| ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ) | 33 |
| ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ) | 50 |

REPORT ISSUED HISTORY

| Issued No. | Description | Issued Date |
|---------------------|-----------------|---------------|
| BTL-FCCE-1-1602C122 | Original Issue. | Mar. 22, 2016 |

1. CERTIFICATION

Equipment : HUAWEI MateBook
Brand Name : HUAWEI
Model Name : HZ-W09
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Date of Test : Feb. 26, 2016 ~ Mar. 21, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1602C122) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| EMC Emission | | | | |
|--|-------------------------------|---------|----------|-----------------|
| Standard(s) | Test Item | Limit | Judgment | Remark |
| FCC Part15, Subpart B ANSI C63.4-2014 | Conducted Emission | Class B | PASS | |
| | Radiated emission Below 1 GHz | Class B | PASS | |
| | Radiated emission Above 1 GHz | Class B | PASS | NOTE (2) |

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is 5850MHz which exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

| Test Site | Method | Measurement Frequency Range | U,(dB) |
|-----------|--------|-----------------------------|--------|
| DG-C02 | CISPR | 150 kHz ~ 30MHz | 2.32 |

B. Radiated Measurement :

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U,(dB) |
|-----------------|--------|-----------------------------|---------------|--------|
| DG-CB03 (3m) | CISPR | 9KHz ~ 30MHz | V | 3.79 |
| | | 9KHz ~ 30MHz | H | 3.57 |
| | | 30MHz ~ 200MHz | V | 3.82 |
| | | 30MHz ~ 200MHz | H | 3.78 |
| | | 200MHz ~ 1,000MHz | V | 4.10 |
| | | 200MHz ~ 1,000MHz | H | 4.06 |

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U,(dB) |
|-----------------|--------|-----------------------------|---------------|--------|
| DG-CB03 (3m) | CISPR | 1GHz ~ 18GHz | V | 3.12 |
| | | 1GHz ~ 18GHz | H | 3.68 |
| | | 18GHz ~ 40GHz | V | 4.15 |
| | | 18GHz ~ 40GHz | H | 4.14 |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|------------------|---|
| Equipment | HUAWEI MateBook |
| Brand Name | HUAWEI |
| Model Name | HZ-W09 |
| Model Difference | N/A |
| Power Source | #1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) SALCOMP (SHENZHEN) Co., Ltd. Model: HW-59C200UHPQ1 #2 Supplied from battery. |
| Power Rating | #1 I/P: 100V~240V~ 50/60 Hz, 1.0A O/P: 5V \equiv 2A or 9V \equiv 2A or 12V \equiv 2A #2 DC 7.60V 4300mAh |
| HW Version | S1 |
| SW Version | HZ-09C001B002 |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- 2.

| Item | Mfr/Brand | Model. |
|--------------------|------------------------------------|-------------|
| Battery | Sunwoda Electronic Co., LTD | HB25B7N4EBC |
| | SCUD (FUJIAN) Electronics Co., Ltd | |
| | Harbin Coslight Power Co., Ltd. | |
| Portfolio Keyboard | HUAWEI | AF20 |
| Mate Pen | HUAWEI | AF61 |

3. USB cable has three types: USB-C Data Charger Cable, USB-C to Micro-USB Cable and Micro-USB to USB-A Adaptor.
Portfolio Keyboard and Mate Pen are options.

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description |
|--------------|--|
| Mode 1 | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Mode 2 | Adapter+BT+5GHz WIFI+Playing+Earphone |
| Mode 3 | Adapter+BT+2.4GHz WIFI+Playing+Speaker |
| Mode 4 | Adapter+BT+2.4GHz WIFI+Playing+Camera on |
| Mode 5 | USB R/W+BT+2.4GHz WIFI |
| Mode 6 | Charge(Mate Pen) |


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

| For Conducted Test | |
|--------------------|--|
| Final Test Mode | Description |
| Mode 1 | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Mode 2 | Adapter+BT+5GHz WIFI+Playing+Earphone |
| Mode 3 | Adapter+BT+2.4GHz WIFI+Playing+Speaker |
| Mode 4 | Adapter+BT+2.4GHz WIFI+Playing+Camera on |


| For Radiated Test | |
|-------------------|--|
| Final Test Mode | Description |
| Mode 1 | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Mode 2 | Adapter+BT+5GHz WIFI+Playing+Earphone |
| Mode 3 | Adapter+BT+2.4GHz WIFI+Playing+Speaker |
| Mode 4 | Adapter+BT+2.4GHz WIFI+Playing+Camera on |
| Mode 5 | USB R/W+BT+2.4GHz WIFI |
| Mode 6 | Charge(Mate Pen) |

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Mode 1-4

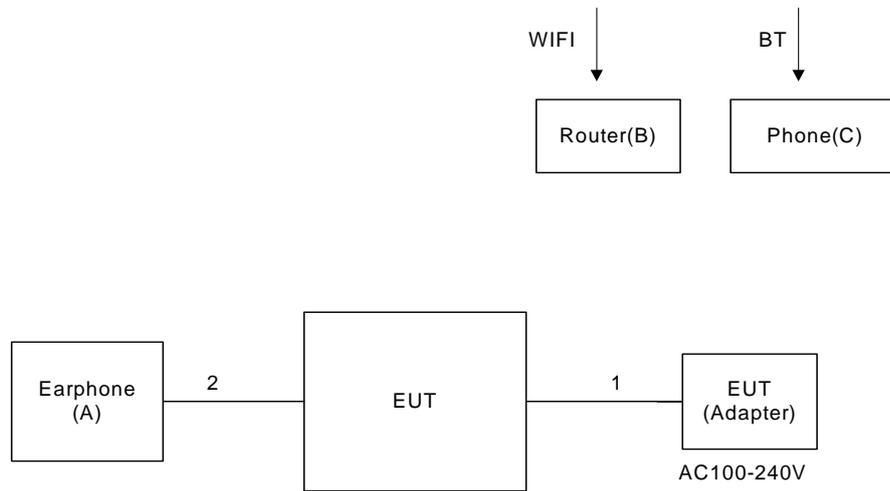

Mode 5

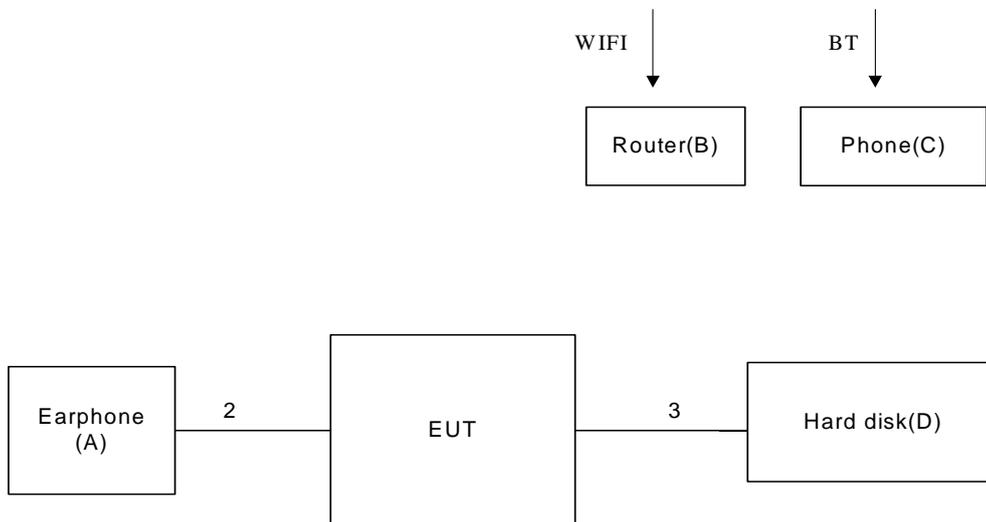

Mode 6

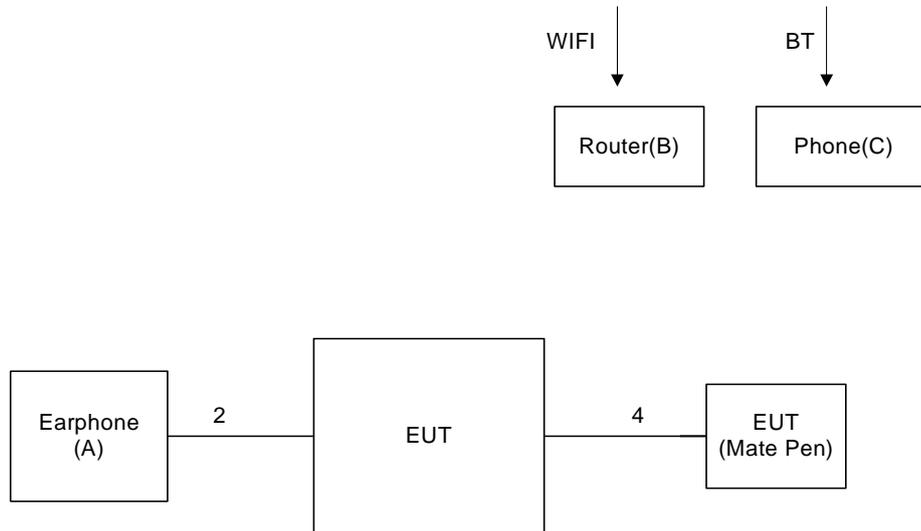

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | FCC ID | Series No. |
|------|------------------|-----------|----------------|------------|---------------|
| A | Earphone | Apple | A1446 | BCG-A1446A | DCYJF3MPF0GV |
| B | Router | TP-LINK | TL-WR1041N | NA | 1142123O01143 |
| C | Phone | Apple | A1332 | BCG-E2380A | 6Q10855UA4S |
| D | USB3.0 hard disk | TOSHIBA | HDDR500E03X | DOC | N/A |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|----------------------------|
| 1 | YES | NO | 1.4m | USB-C Data Charger Cable |
| 2 | NO | NO | 1.5m | Audio Cable |
| 3 | YES | NO | 1.5m | USB-C to Micro-USB Cable |
| 4 | YES | NO | 0.1m | Micro-USB to USB-A Adaptor |

Note:

(1) For detachable type I/O cable should be specified the length m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

| FREQUENCY (MHz) | Class A (dBuV) | | Class B (dBuV) | |
|-----------------|----------------|---------|----------------|-----------|
| | Quasi-peak | Average | Quasi-peak | Average |
| 0.15 -0.5 | 79.00 | 66.00 | 66 - 56 * | 56 - 46 * |
| 0.50 -5.0 | 73.00 | 60.00 | 56.00 | 46.00 |
| 5.0 -30.0 | 73.00 | 60.00 | 60.00 | 50.00 |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value – Limit Value


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

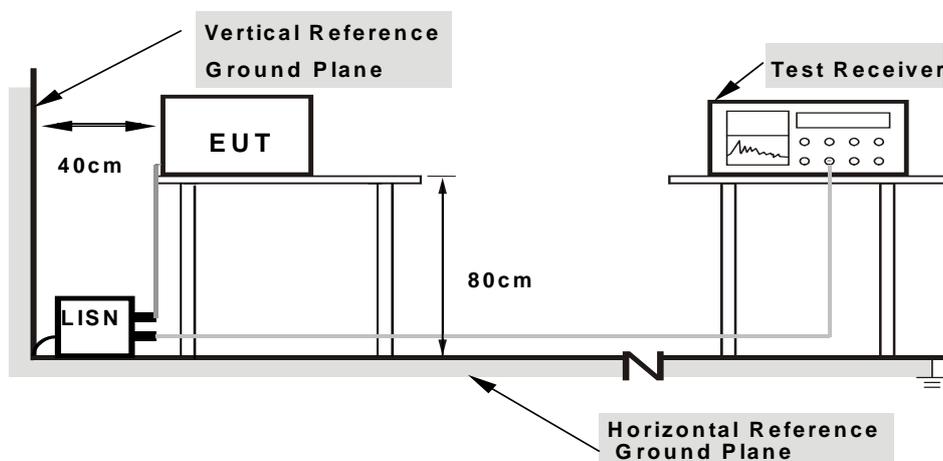

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 24°C Relative Humidity: 60%

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

| Frequency (MHz) | Class A (at 10m) | | Class B (at 3m) | |
|-----------------|--------------------------|----------------------------|--------------------------|----------------------------|
| | (uV/m) Field strength | (dBuV/m) Field strength | (uV/m) Field strength | (dBuV/m) Field strength |
| 30 - 88 | 90 | 39 | 100 | 40 |
| 88 - 216 | 150 | 43.5 | 150 | 43.5 |
| 216 - 960 | 210 | 46.4 | 200 | 46 |
| Above 960 | 300 | 49.5 | 500 | 54 |

CISPR 22 or CAN/CSA-CISPR 22-10:

| Frequency (MHz) | Class A (at 10m) | Class B (at 10m) |
|-----------------|------------------|------------------|
| | dBuV/m | |
| 30 - 230 | 40 | 30 |
| 230 - 1000 | 47 | 37 |

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

| Frequency (MHz) | Class A | | | | Class B | |
|-----------------|------------------|---------|-------------------|---------|------------------|---------|
| | (dBuV/m) (at 3m) | | (dBuV/m) (at 10m) | | (dBuV/m) (at 3m) | |
| | Peak | Average | Peak | Average | Peak | Average |
| Above 1000 | 80 | 60 | 69.5 | 49.5 | 74 | 54 |

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

| Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz) | Range (MHz) |
|---|---|
| Below 1.705 | 30 |
| 1.705 - 108 | 1000 |
| 108 - 500 | 2000 |
| 500 - 1000 | 5000 |
| Above 1000 | 5 th harmonic of the highest frequency or 40 GHz, whichever is lower |

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- j. For measurement of frequency 1GHz -40GHz, the EUT was set 3 meters away from the receiver antenna.

Emission level (dBuV/m)=20log Emission level (uV/m).

The limits above 18GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1m

Distance extrapolation factor = 20 log (3m/1m) dB ;


Limit line = specific limits (dBuV) + 9.5 dB.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

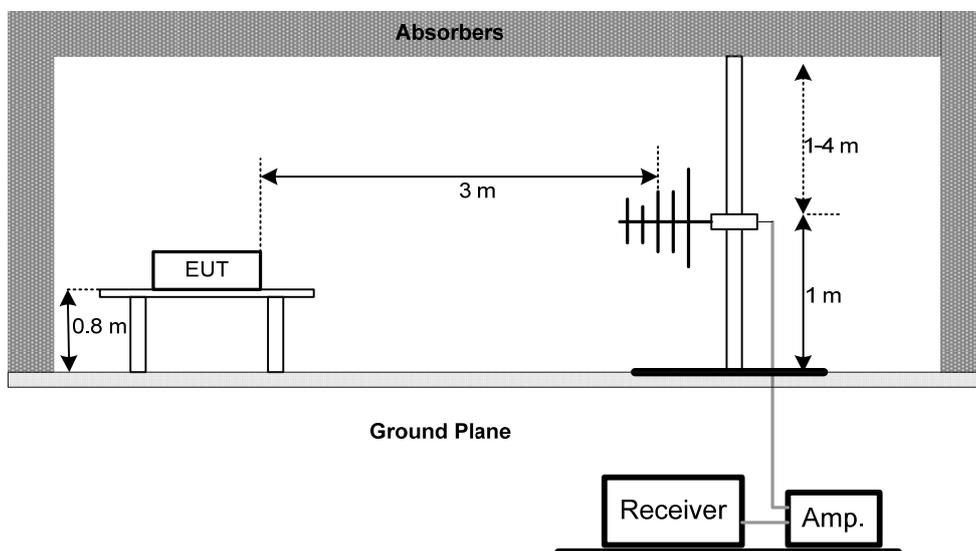

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

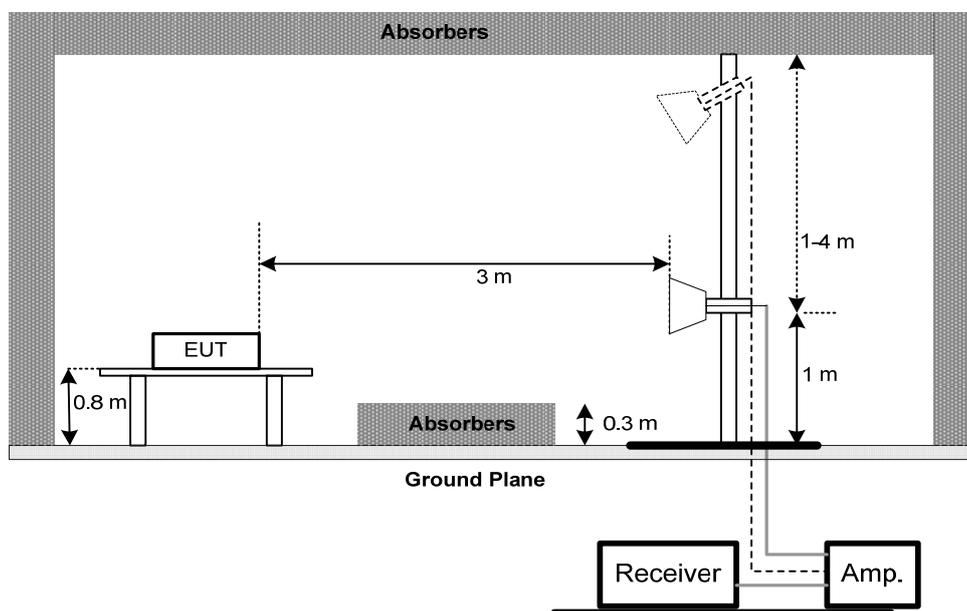

(C) Radiated Emission Test Set-Up Frequency 18 GHz-40GHz

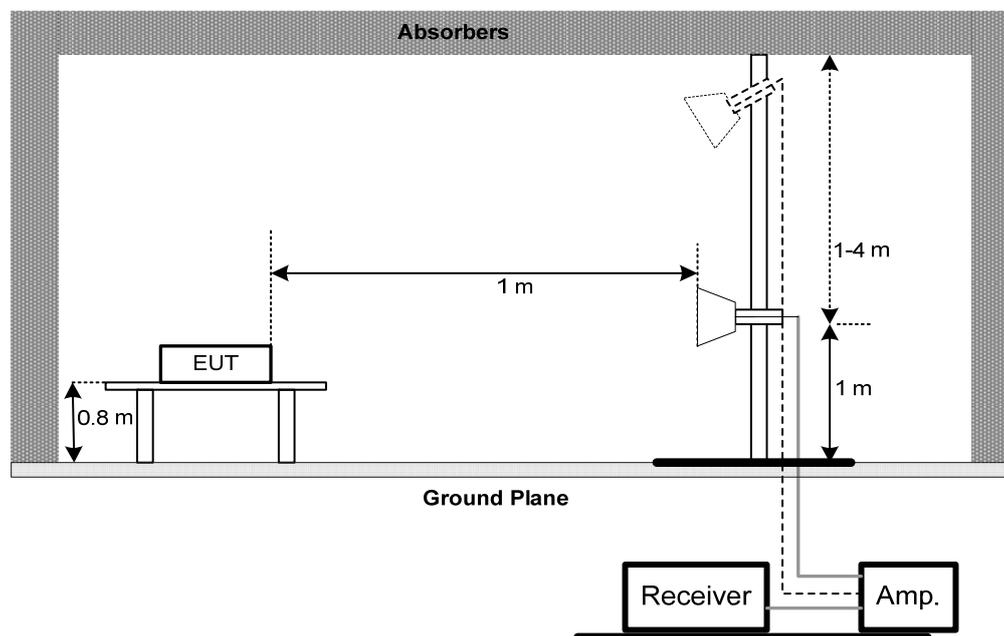

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment B.
 Temperature: 25°C Relative Humidity: 60%

4.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C
 Temperature: 25°C Relative Humidity: 60%

Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

5. MEASUREMENT INSTRUMENTS LIST

| Conducted Emission | | | | | |
|--------------------|----------------------|--------------|-------------------------|------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1 | TWO-LINE V-NETWORK | R&S | ENV216 | 101050 | Feb. 01, 2017 |
| 2 | Test Cable | TIMES | CFD300-NL | C05 | Jun. 14, 2016 |
| 3 | EMI Test Receiver | R&S | ESR3 | 101854 | Dec. 10, 2016 |
| 4 | Measurement Software | EZ | EZ EMC (Version NB-03A) | N/A | N/A |

| Radiated Emission | | | | | |
|-------------------|-----------------------|-----------------------|-------------------------|------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1 | Log-Bicon Antenna | Schwarzbeck | VULB 9168 | 9168-641 | Sep. 10, 2016 |
| 2 | Log-Bicon Antenna | Schwarzbeck | VULB 9168 | 9168-642 | Sep. 10, 2016 |
| 3 | Attenuator | Inmet | AT-N0507 | 01 | Sep. 10, 2016 |
| 4 | Attenuator | Inmet | AT-N0508 | 02 | Sep. 10, 2016 |
| 5 | Pre-Amplifier | EMCI | EMC9135 | 980281 | Oct. 05, 2016 |
| 6 | Pre-Amplifier | EMCI | EMC9135 | 980282 | Oct. 05, 2016 |
| 7 | Test Cable | EMCI | EMC8D-NM-NM-800 | 150102 | Jan. 22, 2017 |
| 8 | Test Cable | EMCI | EMC8D-NM-NM-800 | 150103 | Jan. 22, 2017 |
| 9 | Test Cable | EMCI | EMC8D-NM-NM-5000 | 150105 | Jan. 22, 2017 |
| 10 | Test Cable | EMCI | EMC8D-NM-NM-5000 | 150106 | Jan. 22, 2017 |
| 11 | Test Cable | EMCI | EMC8D-NM-NM-10000 | 150107 | Jan. 22, 2017 |
| 12 | Test Cable | EMCI | EMC8D-NM-NM-20000 | 150116 | Jan. 22, 2017 |
| 13 | EXA Spectrum Analyzer | Keysight Technologies | N9010A | MY54200483 | Sep. 21, 2016 |
| 14 | EMI Receiver | Keysight Technologies | N9038A | MY54130009 | Oct. 02, 2016 |
| 15 | Horn Antenna | Schwarzbeck | BBHA-9120D | 120D-1297 | Aug. 03, 2016 |
| 16 | Pre-Amplifier | Agilent | 8449B | 3008A02331 | Jan. 22, 2017 |
| 17 | Test Cable | EMCI | EMC104-SM-SM-800 | 150110 | Jan. 22, 2017 |
| 18 | Test Cable | EMCI | EMC104-SM-SM-15000 | 150111 | Jan. 22, 2017 |
| 19 | Test Cable | EMCI | EMC104-SM-SM-5000 | 141210 | Jan. 22, 2017 |
| 20 | Measurement Software | EZ | EZ EMC (Version NB-03A) | N/A | N/A |

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: SALCOMP +Battery: Sunwoda |


Line



| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1 | * | 0.1620 | 79.50 | -18.65 | 60.85 | 65.36 | -4.51 | QP | |
| 2 | | 0.1620 | 55.80 | -18.65 | 37.15 | 55.36 | -18.21 | AVG | |
| 3 | | 0.2300 | 69.12 | -18.76 | 50.36 | 62.45 | -12.09 | QP | |
| 4 | | 0.2300 | 49.95 | -18.76 | 31.19 | 52.45 | -21.26 | AVG | |
| 5 | | 0.3340 | 68.52 | -18.85 | 49.67 | 59.35 | -9.68 | QP | |
| 6 | | 0.3340 | 53.99 | -18.85 | 35.14 | 49.35 | -14.21 | AVG | |
| 7 | | 0.4060 | 66.53 | -18.92 | 47.61 | 57.73 | -10.12 | QP | |
| 8 | | 0.4060 | 56.70 | -18.92 | 37.78 | 47.73 | -9.95 | AVG | |
| 9 | | 3.7140 | 66.31 | -19.41 | 46.90 | 56.00 | -9.10 | QP | |
| 10 | | 3.7140 | 53.49 | -19.41 | 34.08 | 46.00 | -11.92 | AVG | |
| 11 | | 14.1980 | 67.51 | -19.21 | 48.30 | 60.00 | -11.70 | QP | |
| 12 | | 14.1980 | 55.74 | -19.21 | 36.53 | 50.00 | -13.47 | AVG | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: SALCOMP +Battery: Sunwoda |


Neutral

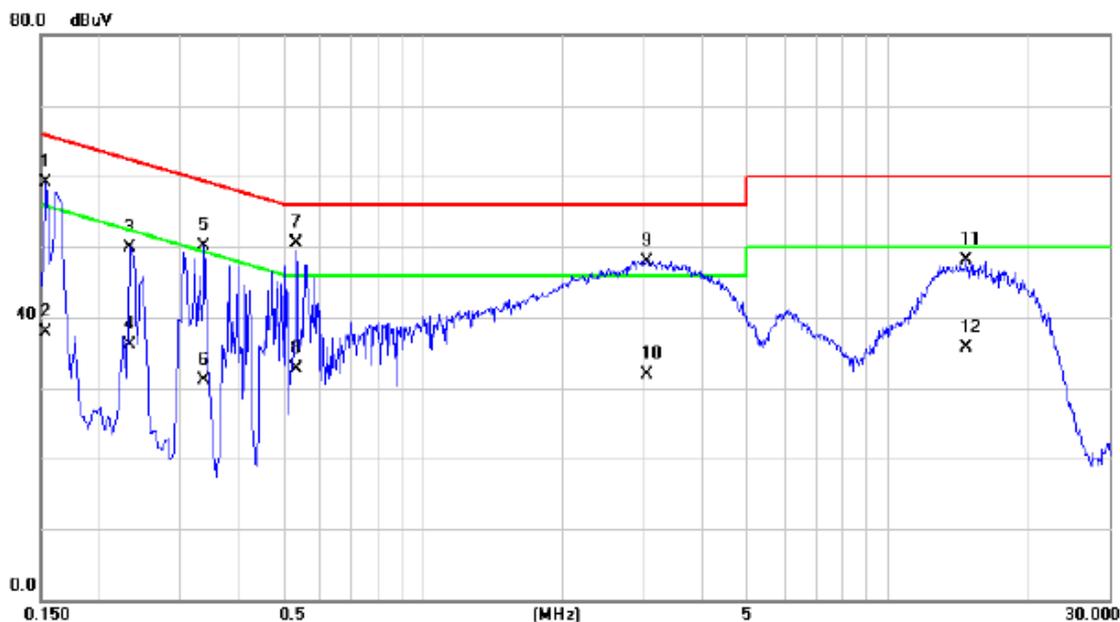

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measurement dBuV | Limit dBuV | Margin dB | Detector | Comment |
|---------|-----------|--------------------|-------------------|------------------|------------|-----------|----------|---------|
| 1 | 0.1540 | 77.81 | -18.63 | 59.18 | 65.78 | -6.60 | QP | |
| 2 | 0.1540 | 56.52 | -18.63 | 37.89 | 55.78 | -17.89 | AVG | |
| 3 | 0.2340 | 68.65 | -18.75 | 49.90 | 62.31 | -12.41 | QP | |
| 4 | 0.2340 | 54.76 | -18.75 | 36.01 | 52.31 | -16.30 | AVG | |
| 5 | 0.3380 | 69.00 | -18.85 | 50.15 | 59.25 | -9.10 | QP | |
| 6 | 0.3380 | 49.98 | -18.85 | 31.13 | 49.25 | -18.12 | AVG | |
| 7 * | 0.5340 | 69.61 | -19.07 | 50.54 | 56.00 | -5.46 | QP | |
| 8 | 0.5340 | 51.73 | -19.07 | 32.66 | 46.00 | -13.34 | AVG | |
| 9 | 3.0380 | 67.42 | -19.45 | 47.97 | 56.00 | -8.03 | QP | |
| 10 | 3.0380 | 51.26 | -19.45 | 31.81 | 46.00 | -14.19 | AVG | |
| 11 | 14.8220 | 67.29 | -19.21 | 48.08 | 60.00 | -11.92 | QP | |
| 12 | 14.8220 | 54.83 | -19.21 | 35.62 | 50.00 | -14.38 | AVG | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Line

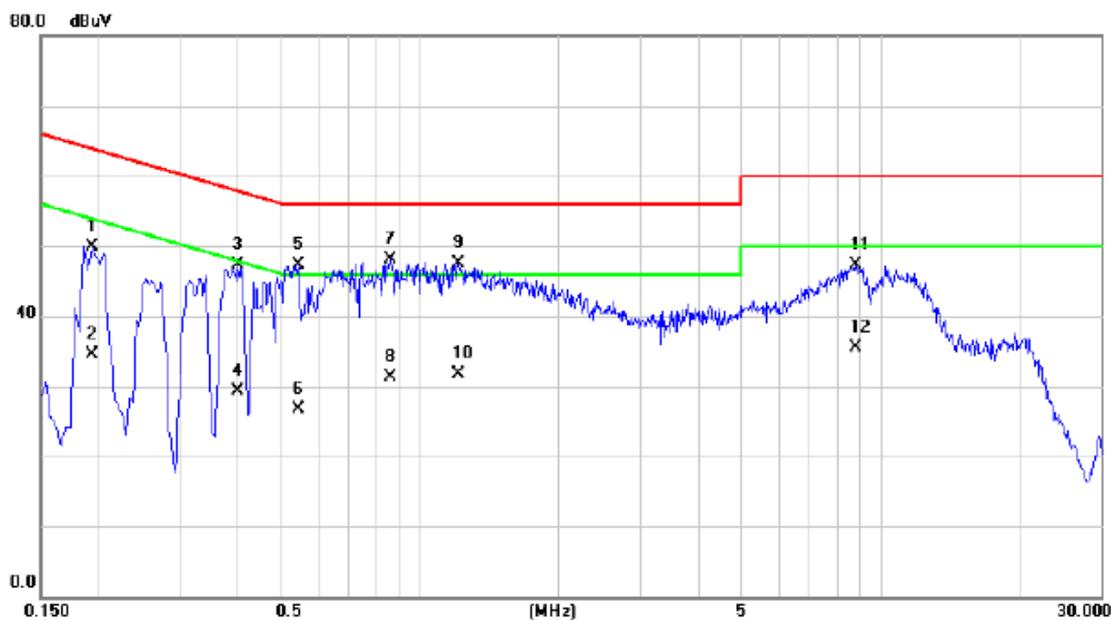

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1 | 0.1940 | 68.70 | -18.71 | 49.99 | 63.86 | -13.87 | QP | |
| 2 | 0.1940 | 53.18 | -18.71 | 34.47 | 53.86 | -19.39 | AVG | |
| 3 | 0.4020 | 66.30 | -18.91 | 47.39 | 57.81 | -10.42 | QP | |
| 4 | 0.4020 | 48.19 | -18.91 | 29.28 | 47.81 | -18.53 | AVG | |
| 5 | 0.5460 | 66.32 | -19.10 | 47.22 | 56.00 | -8.78 | QP | |
| 6 | 0.5460 | 45.80 | -19.10 | 26.70 | 46.00 | -19.30 | AVG | |
| 7 * | 0.8620 | 67.69 | -19.50 | 48.19 | 56.00 | -7.81 | QP | |
| 8 | 0.8620 | 50.77 | -19.50 | 31.27 | 46.00 | -14.73 | AVG | |
| 9 | 1.2100 | 67.01 | -19.56 | 47.45 | 56.00 | -8.55 | QP | |
| 10 | 1.2100 | 51.17 | -19.56 | 31.61 | 46.00 | -14.39 | AVG | |
| 11 | 8.7780 | 66.62 | -19.27 | 47.35 | 60.00 | -12.65 | QP | |
| 12 | 8.7780 | 54.87 | -19.27 | 35.60 | 50.00 | -14.40 | AVG | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Neutral

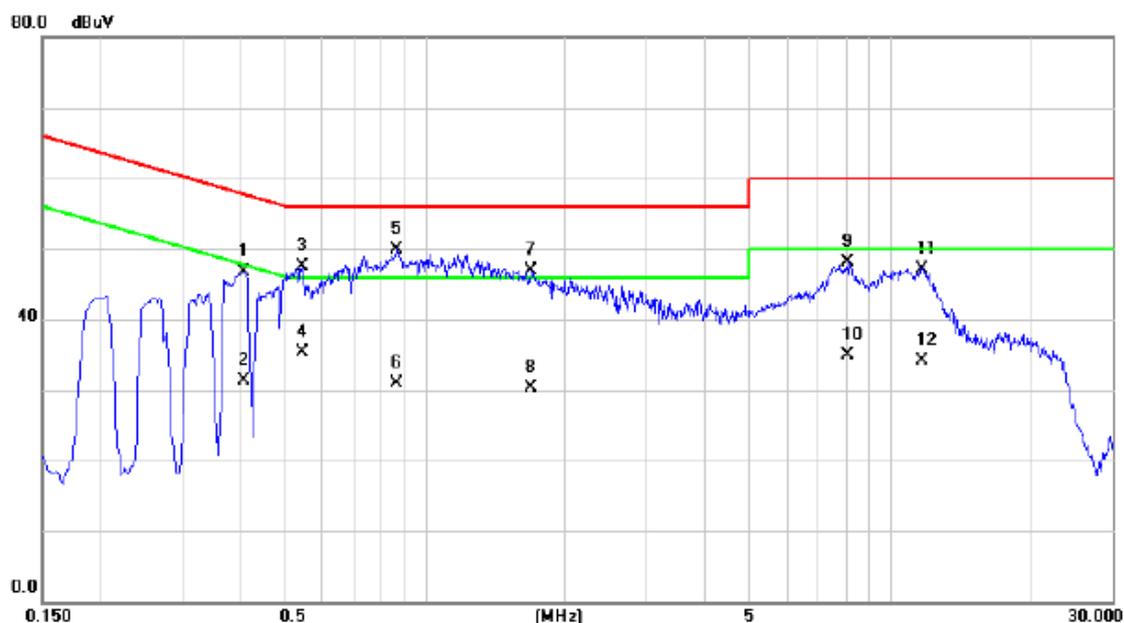

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1 | | 0.4100 | 65.72 | -18.93 | 46.79 | 57.65 | -10.86 | QP | |
| 2 | | 0.4100 | 50.16 | -18.93 | 31.23 | 47.65 | -16.42 | AVG | |
| 3 | | 0.5460 | 66.57 | -19.10 | 47.47 | 56.00 | -8.53 | QP | |
| 4 | | 0.5460 | 54.46 | -19.10 | 35.36 | 46.00 | -10.64 | AVG | |
| 5 | * | 0.8700 | 69.37 | -19.51 | 49.86 | 56.00 | -6.14 | QP | |
| 6 | | 0.8700 | 50.39 | -19.51 | 30.88 | 46.00 | -15.12 | AVG | |
| 7 | | 1.6900 | 66.45 | -19.53 | 46.92 | 56.00 | -9.08 | QP | |
| 8 | | 1.6900 | 49.81 | -19.53 | 30.28 | 46.00 | -15.72 | AVG | |
| 9 | | 8.0700 | 67.43 | -19.28 | 48.15 | 60.00 | -11.85 | QP | |
| 10 | | 8.0700 | 54.23 | -19.28 | 34.95 | 50.00 | -15.05 | AVG | |
| 11 | | 11.7020 | 66.43 | -19.23 | 47.20 | 60.00 | -12.80 | QP | |
| 12 | | 11.7020 | 53.40 | -19.23 | 34.17 | 50.00 | -15.83 | AVG | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: Coslight |


Line

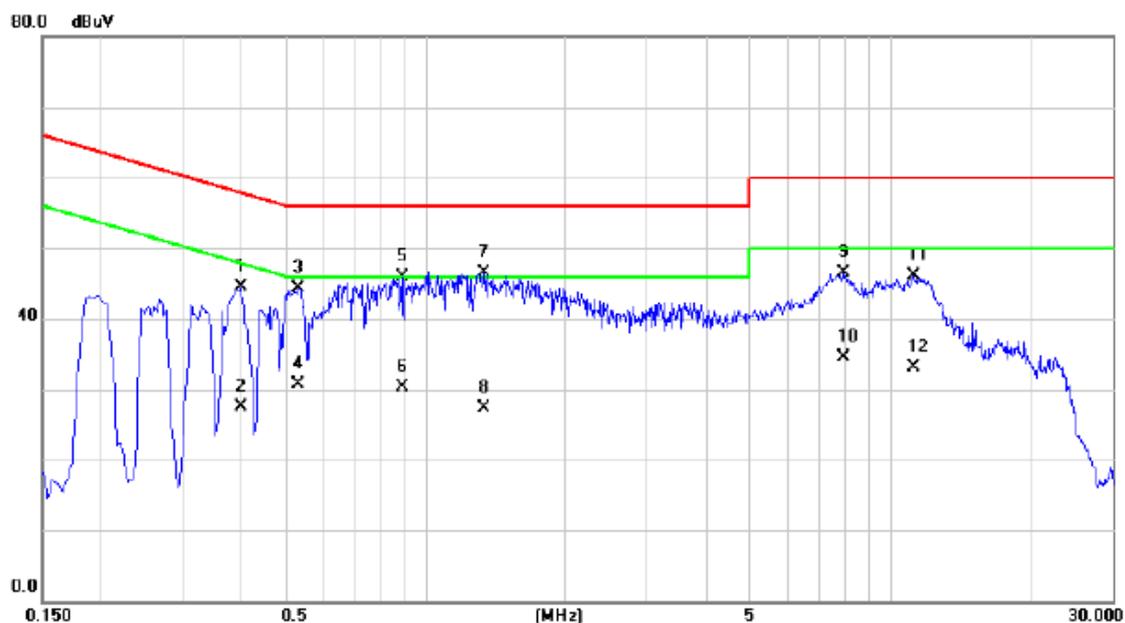

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1 | | 0.4020 | 63.39 | -18.91 | 44.48 | 57.81 | -13.33 | QP | |
| 2 | | 0.4020 | 46.39 | -18.91 | 27.48 | 47.81 | -20.33 | AVG | |
| 3 | | 0.5340 | 63.37 | -19.07 | 44.30 | 56.00 | -11.70 | QP | |
| 4 | | 0.5340 | 49.76 | -19.07 | 30.69 | 46.00 | -15.31 | AVG | |
| 5 | | 0.8900 | 65.45 | -19.51 | 45.94 | 56.00 | -10.06 | QP | |
| 6 | | 0.8900 | 49.88 | -19.51 | 30.37 | 46.00 | -15.63 | AVG | |
| 7 | * | 1.3420 | 65.95 | -19.54 | 46.41 | 56.00 | -9.59 | QP | |
| 8 | | 1.3420 | 46.87 | -19.54 | 27.33 | 46.00 | -18.67 | AVG | |
| 9 | | 7.9180 | 65.75 | -19.28 | 46.47 | 60.00 | -13.53 | QP | |
| 10 | | 7.9180 | 53.69 | -19.28 | 34.41 | 50.00 | -15.59 | AVG | |
| 11 | | 11.2500 | 65.38 | -19.23 | 46.15 | 60.00 | -13.85 | QP | |
| 12 | | 11.2500 | 52.30 | -19.23 | 33.07 | 50.00 | -16.93 | AVG | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: Coslight |


Neutral

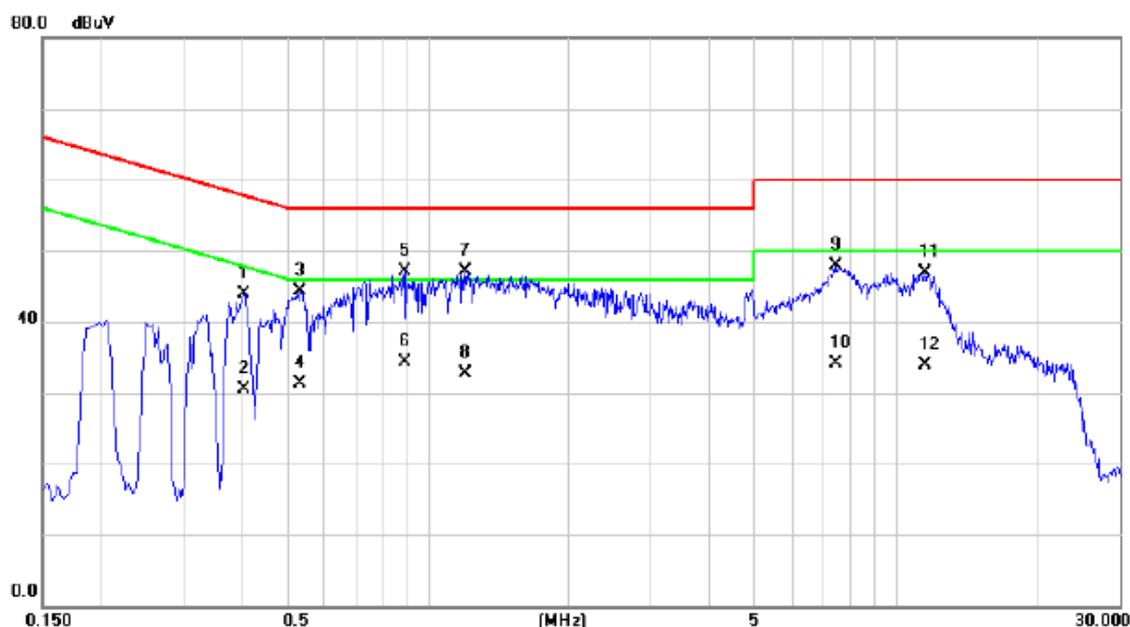

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measurement dBuV | Limit dBuV | Margin dB | Detector | Comment |
|---------|-----------|--------------------|-------------------|------------------|------------|-----------|----------|---------|
| 1 | 0.4060 | 62.78 | -18.92 | 43.86 | 57.73 | -13.87 | QP | |
| 2 | 0.4060 | 49.45 | -18.92 | 30.53 | 47.73 | -17.20 | AVG | |
| 3 | 0.5340 | 63.33 | -19.07 | 44.26 | 56.00 | -11.74 | QP | |
| 4 | 0.5340 | 50.43 | -19.07 | 31.36 | 46.00 | -14.64 | AVG | |
| 5 | 0.8900 | 66.55 | -19.51 | 47.04 | 56.00 | -8.96 | QP | |
| 6 | 0.8900 | 53.89 | -19.51 | 34.38 | 46.00 | -11.62 | AVG | |
| 7 * | 1.2020 | 66.69 | -19.56 | 47.13 | 56.00 | -8.87 | QP | |
| 8 | 1.2020 | 52.28 | -19.56 | 32.72 | 46.00 | -13.28 | AVG | |
| 9 | 7.4260 | 67.16 | -19.30 | 47.86 | 60.00 | -12.14 | QP | |
| 10 | 7.4260 | 53.35 | -19.30 | 34.05 | 50.00 | -15.95 | AVG | |
| 11 | 11.5380 | 66.06 | -19.23 | 46.83 | 60.00 | -13.17 | QP | |
| 12 | 11.5380 | 53.10 | -19.23 | 33.87 | 50.00 | -16.13 | AVG | |

| | |
|---------------|---------------------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+5GHz WIFI+Playing+Earphone |
| Note: | Adapter: SALCOMP +Battery: Sunwoda |


Line

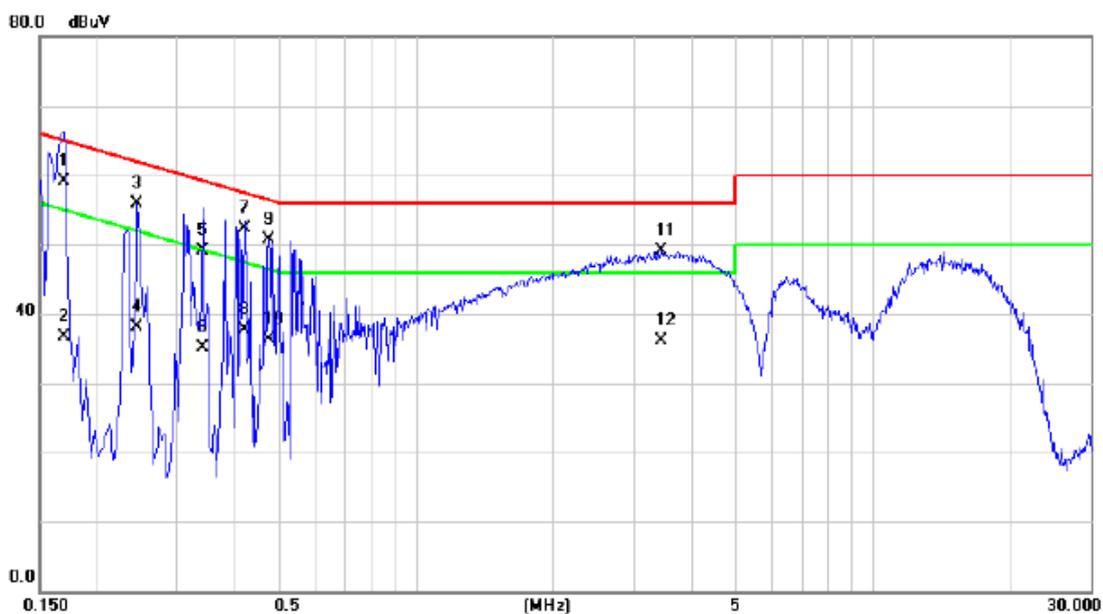

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measurement dBuV | Limit dBuV | Margin dB | Detector | Comment |
|---------|-----------|--------------------|-------------------|------------------|------------|-----------|----------|---------|
| 1 | 0.1700 | 77.72 | -18.66 | 59.06 | 64.96 | -5.90 | QP | |
| 2 | 0.1700 | 55.42 | -18.66 | 36.76 | 54.96 | -18.20 | AVG | |
| 3 | 0.2460 | 74.73 | -18.77 | 55.96 | 61.89 | -5.93 | QP | |
| 4 | 0.2460 | 56.88 | -18.77 | 38.11 | 51.89 | -13.78 | AVG | |
| 5 | 0.3420 | 68.00 | -18.86 | 49.14 | 59.15 | -10.01 | QP | |
| 6 | 0.3420 | 54.00 | -18.86 | 35.14 | 49.15 | -14.01 | AVG | |
| 7 * | 0.4220 | 71.21 | -18.93 | 52.28 | 57.41 | -5.13 | QP | |
| 8 | 0.4220 | 56.71 | -18.93 | 37.78 | 47.41 | -9.63 | AVG | |
| 9 | 0.4780 | 69.64 | -18.97 | 50.67 | 56.37 | -5.70 | QP | |
| 10 | 0.4780 | 55.35 | -18.97 | 36.38 | 46.37 | -9.99 | AVG | |
| 11 | 3.4500 | 68.45 | -19.42 | 49.03 | 56.00 | -6.97 | QP | |
| 12 | 3.4500 | 55.62 | -19.42 | 36.20 | 46.00 | -9.80 | AVG | |

| | |
|---------------|---------------------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+5GHz WIFI+Playing+Earphone |
| Note: | Adapter: SALCOMP +Battery: Sunwoda |


Neutral

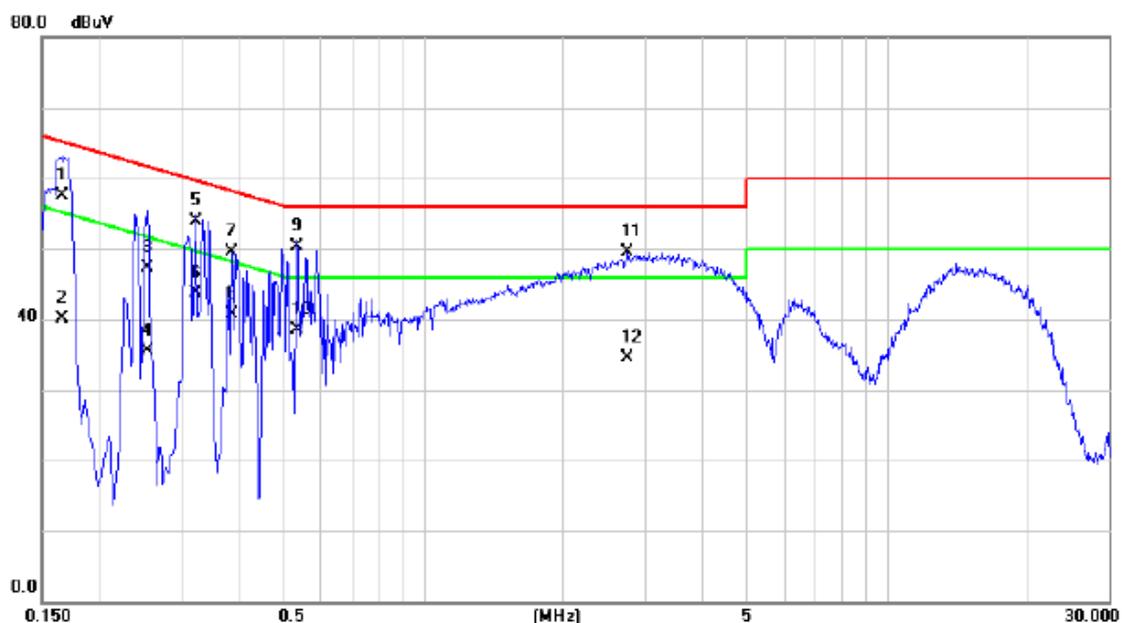

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1 | | 0.1660 | 76.24 | -18.66 | 57.58 | 65.16 | -7.58 | QP | |
| 2 | | 0.1660 | 58.84 | -18.66 | 40.18 | 55.16 | -14.98 | AVG | |
| 3 | | 0.2540 | 66.09 | -18.78 | 47.31 | 61.63 | -14.32 | QP | |
| 4 | | 0.2540 | 54.19 | -18.78 | 35.41 | 51.63 | -16.22 | AVG | |
| 5 | | 0.3220 | 72.76 | -18.84 | 53.92 | 59.66 | -5.74 | QP | |
| 6 | | 0.3220 | 62.56 | -18.84 | 43.72 | 49.66 | -5.94 | AVG | |
| 7 | | 0.3860 | 68.48 | -18.90 | 49.58 | 58.15 | -8.57 | QP | |
| 8 | | 0.3860 | 59.63 | -18.90 | 40.73 | 48.15 | -7.42 | AVG | |
| 9 | * | 0.5340 | 69.37 | -19.07 | 50.30 | 56.00 | -5.70 | QP | |
| 10 | | 0.5340 | 57.53 | -19.07 | 38.46 | 46.00 | -7.54 | AVG | |
| 11 | | 2.7540 | 68.91 | -19.45 | 49.46 | 56.00 | -6.54 | QP | |
| 12 | | 2.7540 | 53.94 | -19.45 | 34.49 | 46.00 | -11.51 | AVG | |

| | |
|---------------|--|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Speaker |
| Note: | Adapter: SALCOMP +Battery: Sunwoda |


Line

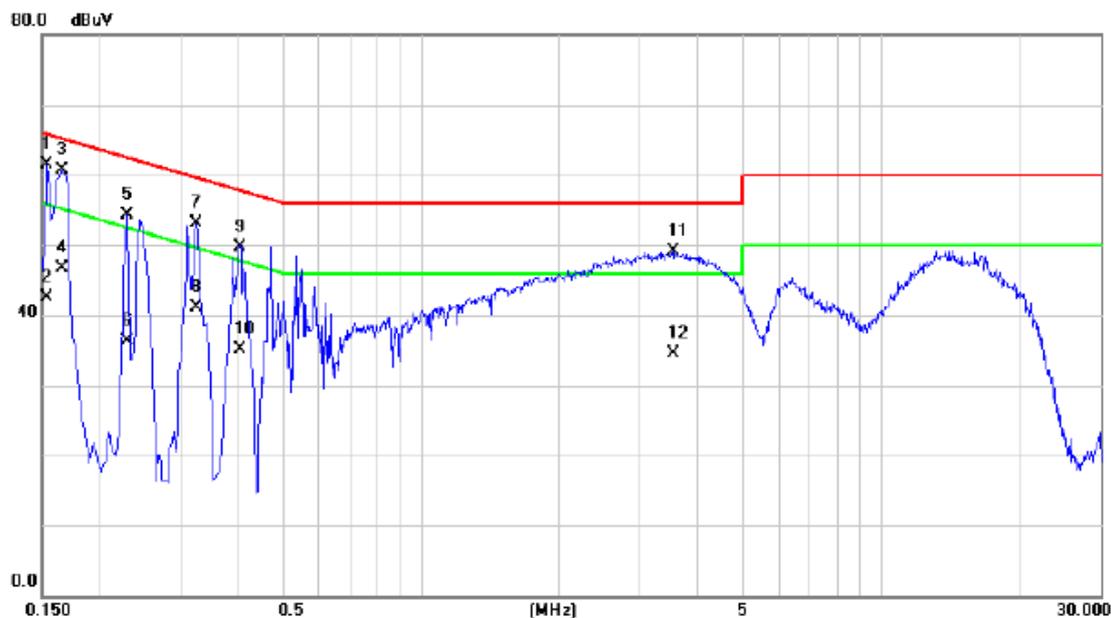

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1 | * | 0.1540 | 80.05 | -18.63 | 61.42 | 65.78 | -4.36 | QP | |
| 2 | | 0.1540 | 61.07 | -18.63 | 42.44 | 55.78 | -13.34 | AVG | |
| 3 | | 0.1660 | 79.39 | -18.66 | 60.73 | 65.16 | -4.43 | QP | |
| 4 | | 0.1660 | 65.42 | -18.66 | 46.76 | 55.16 | -8.40 | AVG | |
| 5 | | 0.2300 | 73.04 | -18.76 | 54.28 | 62.45 | -8.17 | QP | |
| 6 | | 0.2300 | 55.05 | -18.76 | 36.29 | 52.45 | -16.16 | AVG | |
| 7 | | 0.3260 | 71.92 | -18.84 | 53.08 | 59.55 | -6.47 | QP | |
| 8 | | 0.3260 | 59.88 | -18.84 | 41.04 | 49.55 | -8.51 | AVG | |
| 9 | | 0.4061 | 68.70 | -18.92 | 49.78 | 57.73 | -7.95 | QP | |
| 10 | | 0.4061 | 54.00 | -18.92 | 35.08 | 47.73 | -12.65 | AVG | |
| 11 | | 3.5380 | 68.49 | -19.42 | 49.07 | 56.00 | -6.93 | QP | |
| 12 | | 3.5380 | 54.02 | -19.42 | 34.60 | 46.00 | -11.40 | AVG | |

| | |
|---------------|--|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Speaker |
| Note: | Adapter: SALCOMP +Battery: Sunwoda |


Neutral

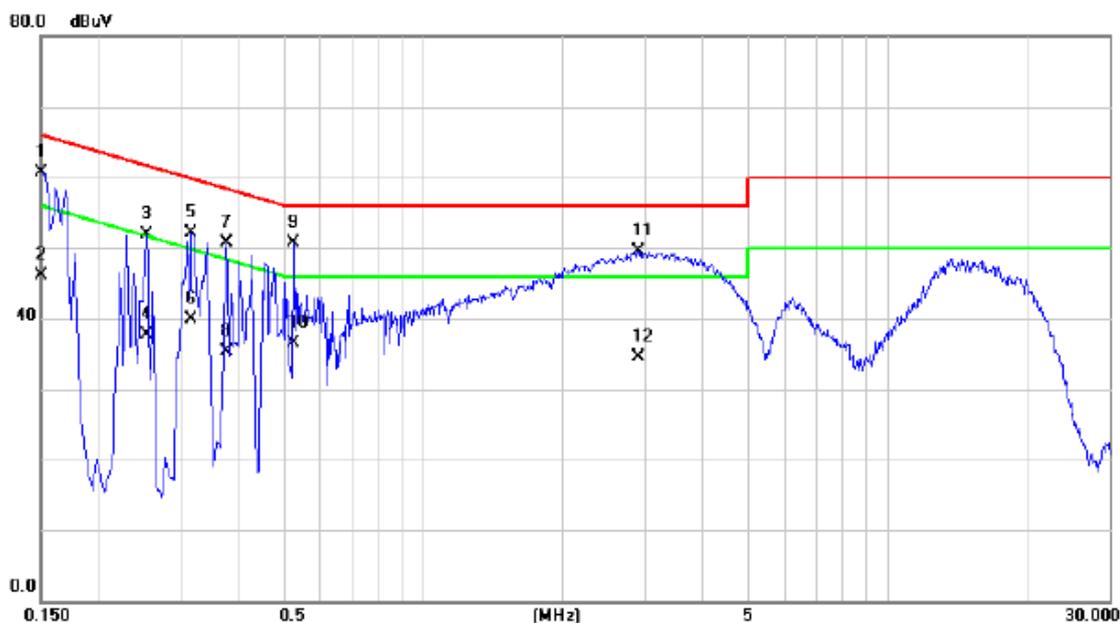

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1 | | 0.1500 | 79.32 | -18.62 | 60.70 | 66.00 | -5.30 | QP | |
| 2 | | 0.1500 | 64.81 | -18.62 | 46.19 | 56.00 | -9.81 | AVG | |
| 3 | | 0.2540 | 70.61 | -18.78 | 51.83 | 61.63 | -9.80 | QP | |
| 4 | | 0.2540 | 56.39 | -18.78 | 37.61 | 51.63 | -14.02 | AVG | |
| 5 | | 0.3180 | 71.02 | -18.83 | 52.19 | 59.76 | -7.57 | QP | |
| 6 | | 0.3180 | 58.75 | -18.83 | 39.92 | 49.76 | -9.84 | AVG | |
| 7 | | 0.3780 | 69.51 | -18.89 | 50.62 | 58.32 | -7.70 | QP | |
| 8 | | 0.3780 | 54.12 | -18.89 | 35.23 | 48.32 | -13.09 | AVG | |
| 9 | * | 0.5260 | 69.82 | -19.05 | 50.77 | 56.00 | -5.23 | QP | |
| 10 | | 0.5260 | 55.51 | -19.05 | 36.46 | 46.00 | -9.54 | AVG | |
| 11 | | 2.9060 | 69.03 | -19.45 | 49.58 | 56.00 | -6.42 | QP | |
| 12 | | 2.9060 | 53.95 | -19.45 | 34.50 | 46.00 | -11.50 | AVG | |

| | |
|---------------|--|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Camera on |
| Note: | Adapter: SALCOMP +Battery: Sunwoda |


Line

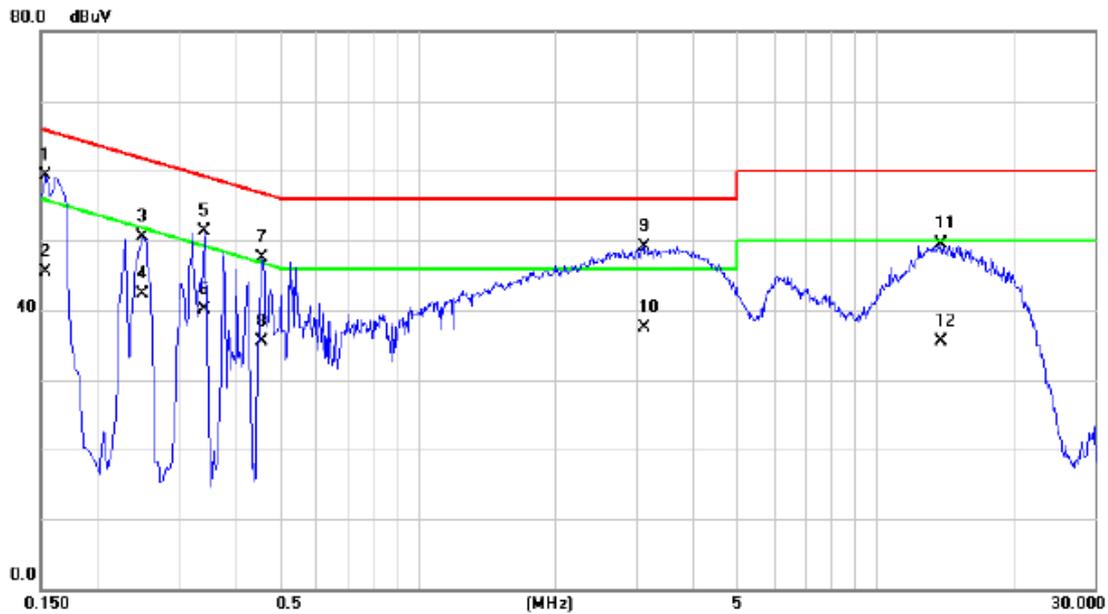

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1 | * | 0.1540 | 77.89 | -18.63 | 59.26 | 65.78 | -6.52 | QP | |
| 2 | | 0.1540 | 64.07 | -18.63 | 45.44 | 55.78 | -10.34 | AVG | |
| 3 | | 0.2500 | 69.22 | -18.78 | 50.44 | 61.76 | -11.32 | QP | |
| 4 | | 0.2500 | 61.09 | -18.78 | 42.31 | 51.76 | -9.45 | AVG | |
| 5 | | 0.3420 | 70.11 | -18.86 | 51.25 | 59.15 | -7.90 | QP | |
| 6 | | 0.3420 | 58.90 | -18.86 | 40.04 | 49.15 | -9.11 | AVG | |
| 7 | | 0.4580 | 66.51 | -18.95 | 47.56 | 56.73 | -9.17 | QP | |
| 8 | | 0.4580 | 54.53 | -18.95 | 35.58 | 46.73 | -11.15 | AVG | |
| 9 | | 3.1100 | 68.53 | -19.44 | 49.09 | 56.00 | -6.91 | QP | |
| 10 | | 3.1100 | 56.86 | -19.44 | 37.42 | 46.00 | -8.58 | AVG | |
| 11 | | 13.8500 | 68.78 | -19.21 | 49.57 | 60.00 | -10.43 | QP | |
| 12 | | 13.8500 | 54.65 | -19.21 | 35.44 | 50.00 | -14.56 | AVG | |

| | |
|---------------|--|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Camera on |
| Note: | Adapter: SALCOMP +Battery: Sunwoda |

Neutral

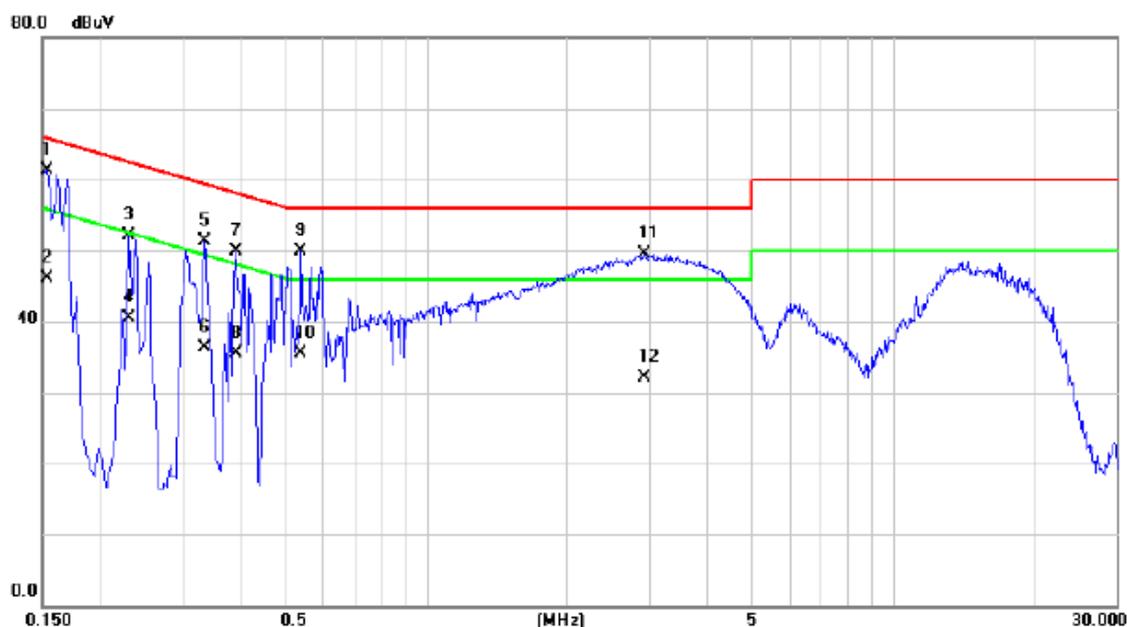


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1 | * | 0.1540 | 79.93 | -18.63 | 61.30 | 65.78 | -4.48 | QP | |
| 2 | | 0.1540 | 64.82 | -18.63 | 46.19 | 55.78 | -9.59 | AVG | |
| 3 | | 0.2300 | 70.83 | -18.76 | 52.07 | 62.45 | -10.38 | QP | |
| 4 | | 0.2300 | 59.27 | -18.76 | 40.51 | 52.45 | -11.94 | AVG | |
| 5 | | 0.3340 | 70.18 | -18.85 | 51.33 | 59.35 | -8.02 | QP | |
| 6 | | 0.3340 | 55.08 | -18.85 | 36.23 | 49.35 | -13.12 | AVG | |
| 7 | | 0.3900 | 68.81 | -18.90 | 49.91 | 58.06 | -8.15 | QP | |
| 8 | | 0.3900 | 54.33 | -18.90 | 35.43 | 48.06 | -12.63 | AVG | |
| 9 | | 0.5380 | 68.91 | -19.08 | 49.83 | 56.00 | -6.17 | QP | |
| 10 | | 0.5380 | 54.54 | -19.08 | 35.46 | 46.00 | -10.54 | AVG | |
| 11 | | 2.9220 | 69.00 | -19.45 | 49.55 | 56.00 | -6.45 | QP | |
| 12 | | 2.9220 | 51.65 | -19.45 | 32.20 | 46.00 | -13.80 | AVG | |

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Vertical

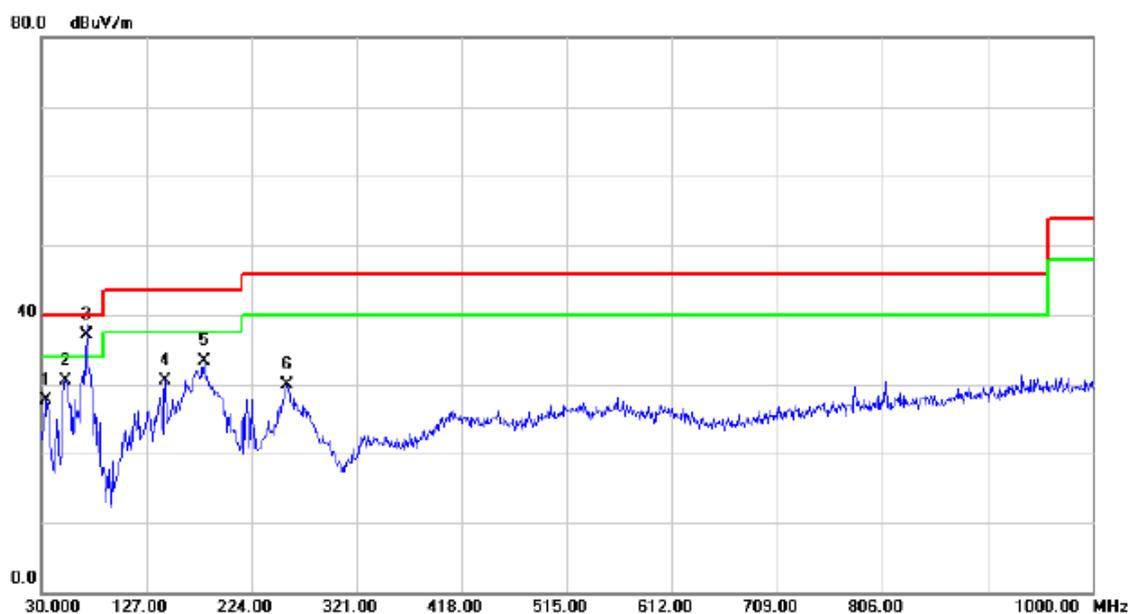

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 34.8500 | 42.84 | -15.15 | 27.69 | 40.00 | -12.31 | QP | |
| 2 | | 52.3100 | 44.36 | -13.93 | 30.43 | 40.00 | -9.57 | QP | |
| 3 | * | 71.7100 | 53.71 | -16.58 | 37.13 | 40.00 | -2.87 | QP | |
| 4 | | 144.4600 | 44.87 | -14.27 | 30.60 | 43.50 | -12.90 | QP | |
| 5 | | 180.3500 | 48.85 | -15.47 | 33.38 | 43.50 | -10.12 | QP | |
| 6 | | 256.9800 | 44.67 | -14.73 | 29.94 | 46.00 | -16.06 | QP | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Horizontal

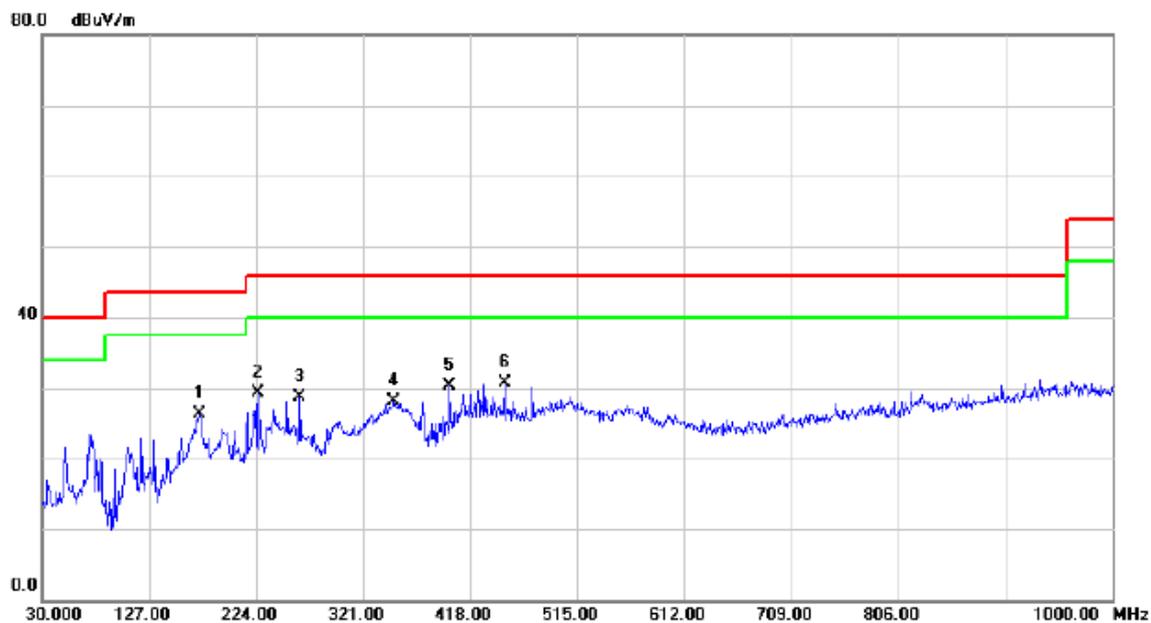

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 172.5900 | 40.98 | -14.68 | 26.30 | 43.50 | -17.20 | QP | |
| 2 | | 225.9400 | 45.52 | -16.13 | 29.39 | 46.00 | -16.61 | QP | |
| 3 | | 263.7700 | 43.12 | -14.43 | 28.69 | 46.00 | -17.31 | QP | |
| 4 | | 349.1300 | 40.30 | -12.26 | 28.04 | 46.00 | -17.96 | QP | |
| 5 | | 399.5700 | 41.32 | -11.10 | 30.22 | 46.00 | -15.78 | QP | |
| 6 | * | 449.0400 | 40.45 | -9.68 | 30.77 | 46.00 | -15.23 | QP | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: Coslight |

Vertical

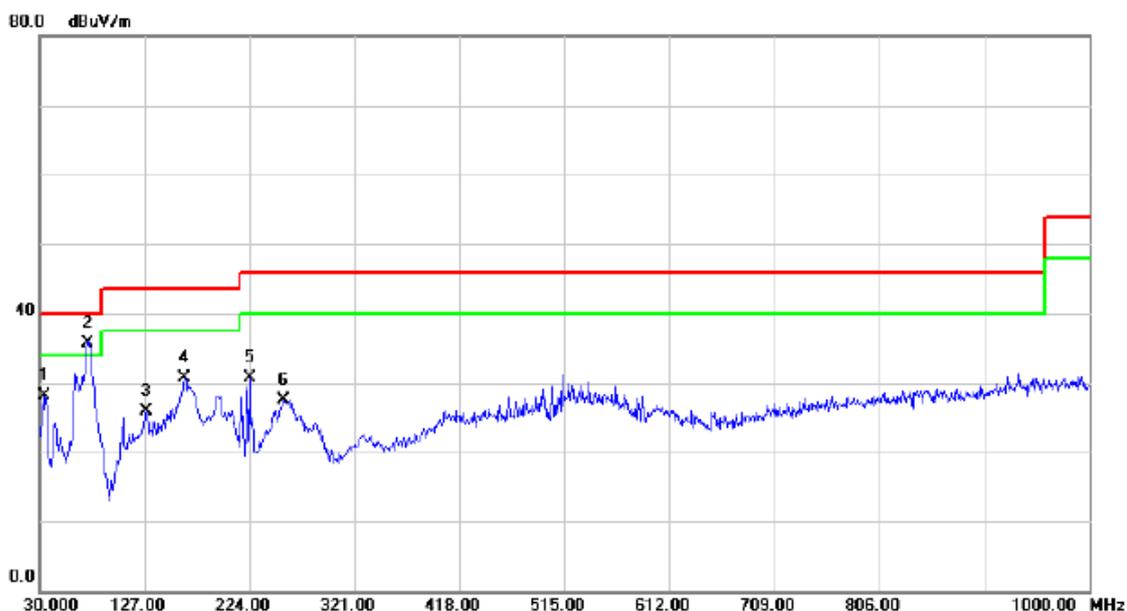

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 34.8500 | 43.23 | -15.15 | 28.08 | 40.00 | -11.92 | QP | |
| 2 | * | 74.6200 | 52.84 | -17.11 | 35.73 | 40.00 | -4.27 | QP | |
| 3 | | 128.9400 | 41.35 | -15.40 | 25.95 | 43.50 | -17.55 | QP | |
| 4 | | 163.8600 | 44.87 | -14.11 | 30.76 | 43.50 | -12.74 | QP | |
| 5 | | 224.0000 | 46.97 | -16.28 | 30.69 | 46.00 | -15.31 | QP | |
| 6 | | 256.0100 | 42.34 | -14.79 | 27.55 | 46.00 | -18.45 | QP | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: Coslight |

Horizontal



| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | * | 166.7700 | 44.02 | -14.26 | 29.76 | 43.50 | -13.74 | QP | |
| 2 | | 216.2400 | 44.40 | -16.57 | 27.83 | 46.00 | -18.17 | QP | |
| 3 | | 263.7700 | 42.09 | -14.43 | 27.66 | 46.00 | -18.34 | QP | |
| 4 | | 346.2200 | 40.96 | -12.33 | 28.63 | 46.00 | -17.37 | QP | |
| 5 | | 449.0400 | 40.73 | -9.68 | 31.05 | 46.00 | -14.95 | QP | |
| 6 | | 513.0600 | 40.05 | -8.96 | 31.09 | 46.00 | -14.91 | QP | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: SALCOMP +Battery: Sunwoda |


Vertical



| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | * | 35.8200 | 43.23 | -14.99 | 28.24 | 40.00 | -11.76 | QP | |
| 2 | | 127.9700 | 41.43 | -15.48 | 25.95 | 43.50 | -17.55 | QP | |
| 3 | | 165.8000 | 45.06 | -14.21 | 30.85 | 43.50 | -12.65 | QP | |
| 4 | | 194.9000 | 47.04 | -16.70 | 30.34 | 43.50 | -13.16 | QP | |
| 5 | | 223.0300 | 44.94 | -16.35 | 28.59 | 46.00 | -17.41 | QP | |
| 6 | | 257.9500 | 43.37 | -14.68 | 28.69 | 46.00 | -17.31 | QP | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: SALCOMP +Battery: Sunwoda |

Horizontal

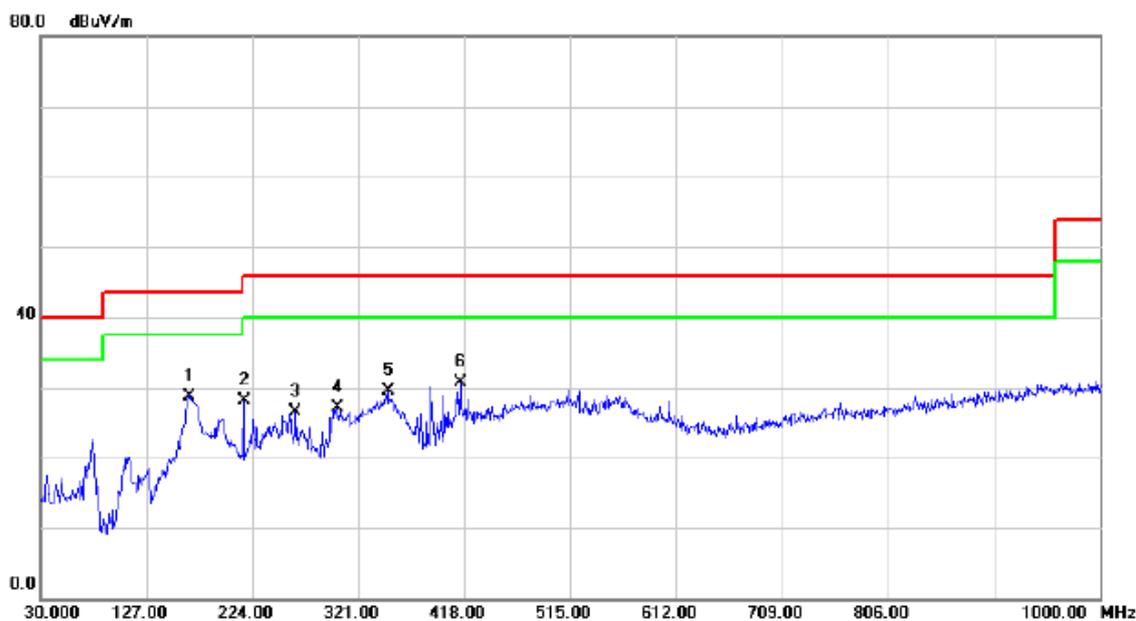

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | * | 166.7700 | 43.06 | -14.26 | 28.80 | 43.50 | -14.70 | QP | |
| 2 | | 216.2400 | 44.62 | -16.57 | 28.05 | 46.00 | -17.95 | QP | |
| 3 | | 263.7700 | 41.00 | -14.43 | 26.57 | 46.00 | -19.43 | QP | |
| 4 | | 301.6000 | 40.56 | -13.44 | 27.12 | 46.00 | -18.88 | QP | |
| 5 | | 348.1600 | 41.82 | -12.29 | 29.53 | 46.00 | -16.47 | QP | |
| 6 | | 414.1200 | 41.39 | -10.68 | 30.71 | 46.00 | -15.29 | QP | |

| | |
|---------------|---------------------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+5GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Vertical



| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 34.8500 | 43.73 | -15.15 | 28.58 | 40.00 | -11.42 | QP | |
| 2 | ! | 62.9800 | 50.96 | -15.20 | 35.76 | 40.00 | -4.24 | QP | |
| 3 | * | 74.6200 | 53.12 | -17.11 | 36.01 | 40.00 | -3.99 | QP | |
| 4 | | 144.4600 | 44.11 | -14.27 | 29.84 | 43.50 | -13.66 | QP | |
| 5 | | 165.8000 | 45.26 | -14.21 | 31.05 | 43.50 | -12.45 | QP | |
| 6 | | 513.0600 | 40.86 | -8.96 | 31.90 | 46.00 | -14.10 | QP | |

| | |
|---------------|---------------------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+5GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |

Horizontal

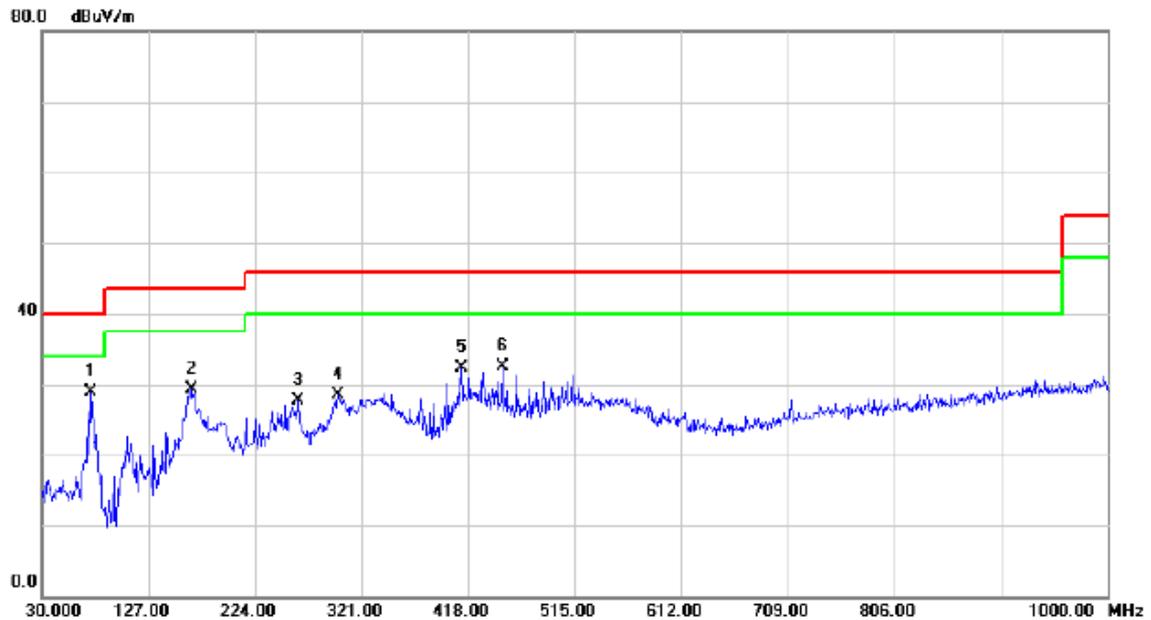

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | * | 74.6200 | 45.92 | -17.11 | 28.81 | 40.00 | -11.19 | QP | |
| 2 | | 165.8000 | 43.53 | -14.21 | 29.32 | 43.50 | -14.18 | QP | |
| 3 | | 263.7700 | 42.18 | -14.43 | 27.75 | 46.00 | -18.25 | QP | |
| 4 | | 299.6600 | 41.94 | -13.50 | 28.44 | 46.00 | -17.56 | QP | |
| 5 | | 412.1800 | 43.01 | -10.74 | 32.27 | 46.00 | -13.73 | QP | |
| 6 | | 449.0400 | 42.16 | -9.68 | 32.48 | 46.00 | -13.52 | QP | |

| | |
|---------------|--|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Speaker |
| Note: | Adapter: BYD +Battery: SCUD |


Vertical



| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 50.3700 | 44.50 | -13.73 | 30.77 | 40.00 | -9.23 | QP | |
| 2 | * | 71.7100 | 52.81 | -16.58 | 36.23 | 40.00 | -3.77 | QP | |
| 3 | | 139.6100 | 44.52 | -14.48 | 30.04 | 43.50 | -13.46 | QP | |
| 4 | | 180.3500 | 48.58 | -15.47 | 33.11 | 43.50 | -10.39 | QP | |
| 5 | | 257.9500 | 45.94 | -14.68 | 31.26 | 46.00 | -14.74 | QP | |
| 6 | | 521.7900 | 38.02 | -8.74 | 29.28 | 46.00 | -16.72 | QP | |

| | |
|---------------|--|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Speaker |
| Note: | Adapter: BYD +Battery: SCUD |


Horizontal

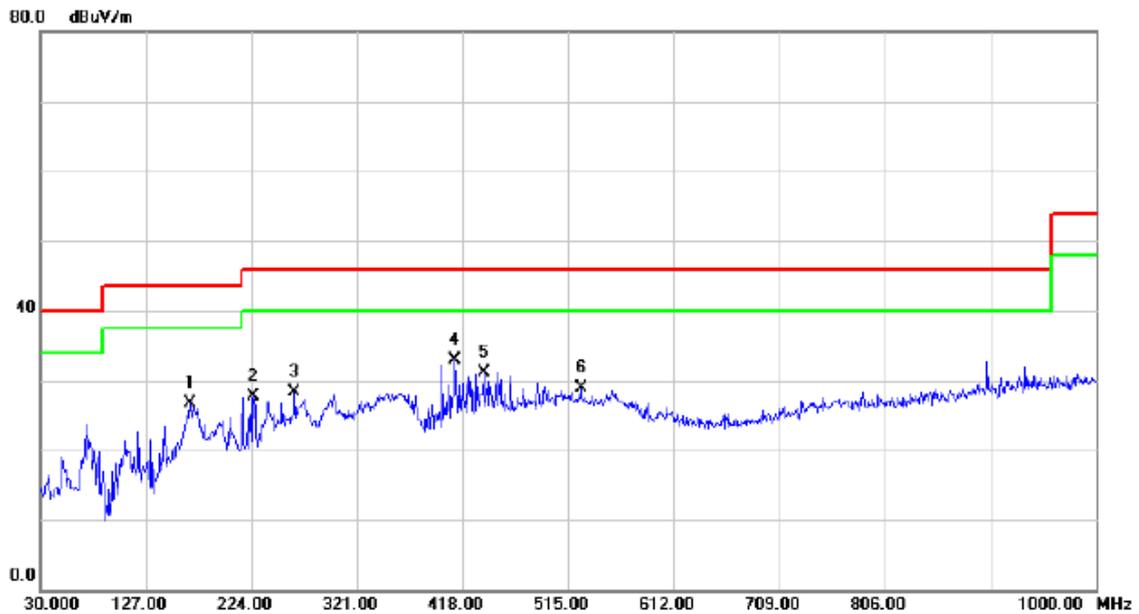

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | 167.7400 | 40.99 | -14.31 | 26.68 | 43.50 | -16.82 | QP | |
| 2 | 225.9400 | 43.87 | -16.13 | 27.74 | 46.00 | -18.26 | QP | |
| 3 | 263.7700 | 42.67 | -14.43 | 28.24 | 46.00 | -17.76 | QP | |
| 4 * | 411.2100 | 43.76 | -10.76 | 33.00 | 46.00 | -13.00 | QP | |
| 5 | 437.4000 | 41.20 | -10.02 | 31.18 | 46.00 | -14.82 | QP | |
| 6 | 526.6400 | 37.44 | -8.60 | 28.84 | 46.00 | -17.16 | QP | |

| | |
|---------------|--|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Camera on |
| Note: | Adapter: BYD +Battery: SCUD |

Vertical

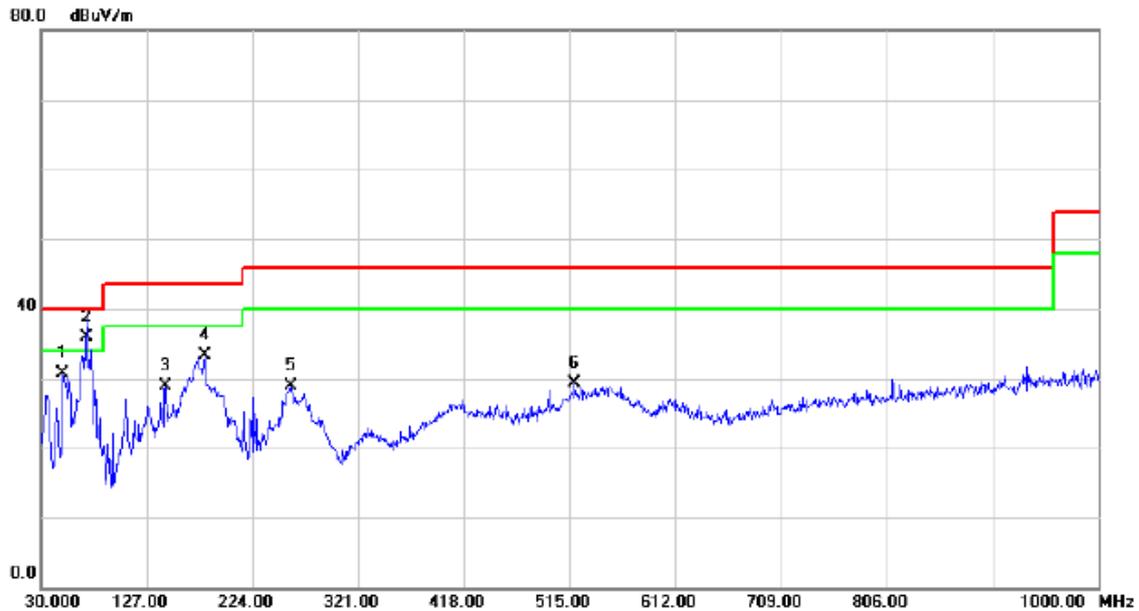

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 50.3700 | 44.35 | -13.73 | 30.62 | 40.00 | -9.38 | QP | |
| 2 | * | 71.7100 | 52.51 | -16.58 | 35.93 | 40.00 | -4.07 | QP | |
| 3 | | 144.4600 | 43.18 | -14.27 | 28.91 | 43.50 | -14.59 | QP | |
| 4 | | 180.3500 | 48.77 | -15.47 | 33.30 | 43.50 | -10.20 | QP | |
| 5 | | 258.9200 | 43.52 | -14.62 | 28.90 | 46.00 | -17.10 | QP | |
| 6 | | 518.8800 | 38.02 | -8.81 | 29.21 | 46.00 | -16.79 | QP | |

| | |
|---------------|--|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Camera on |
| Note: | Adapter: BYD +Battery: SCUD |


Horizontal



| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 120.2100 | 41.78 | -16.20 | 25.58 | 43.50 | -17.92 | QP | |
| 2 | | 174.5300 | 40.87 | -14.87 | 26.00 | 43.50 | -17.50 | QP | |
| 3 | | 225.9400 | 43.69 | -16.13 | 27.56 | 46.00 | -18.44 | QP | |
| 4 | | 263.7700 | 43.61 | -14.43 | 29.18 | 46.00 | -16.82 | QP | |
| 5 | | 399.5700 | 41.18 | -11.10 | 30.08 | 46.00 | -15.92 | QP | |
| 6 | * | 449.0400 | 43.69 | -9.68 | 34.01 | 46.00 | -11.99 | QP | |

| | |
|---------------|-----------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | USB R/W+BT+2.4GHz WIFI |
| Note: | Adapter: BYD +Battery: SCUD |


Vertical

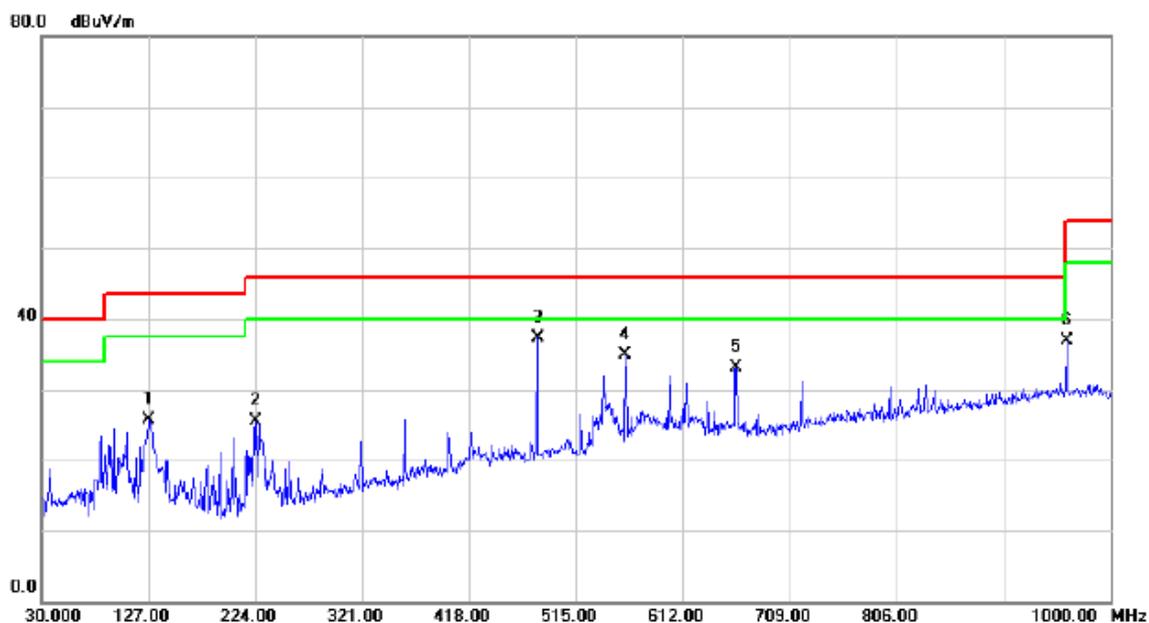

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 127.9700 | 41.19 | -15.48 | 25.71 | 43.50 | -17.79 | QP | |
| 2 | | 224.0000 | 41.85 | -16.28 | 25.57 | 46.00 | -20.43 | QP | |
| 3 | * | 480.0800 | 46.66 | -9.45 | 37.21 | 46.00 | -8.79 | QP | |
| 4 | | 559.6200 | 42.85 | -7.88 | 34.97 | 46.00 | -11.03 | QP | |
| 5 | | 660.5000 | 39.60 | -6.59 | 33.01 | 46.00 | -12.99 | QP | |
| 6 | | 960.2300 | 38.54 | -1.67 | 36.87 | 54.00 | -17.13 | QP | |

| | |
|---------------|-----------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | USB R/W+BT+2.4GHz WIFI |
| Note: | Adapter: BYD +Battery: SCUD |


Horizontal

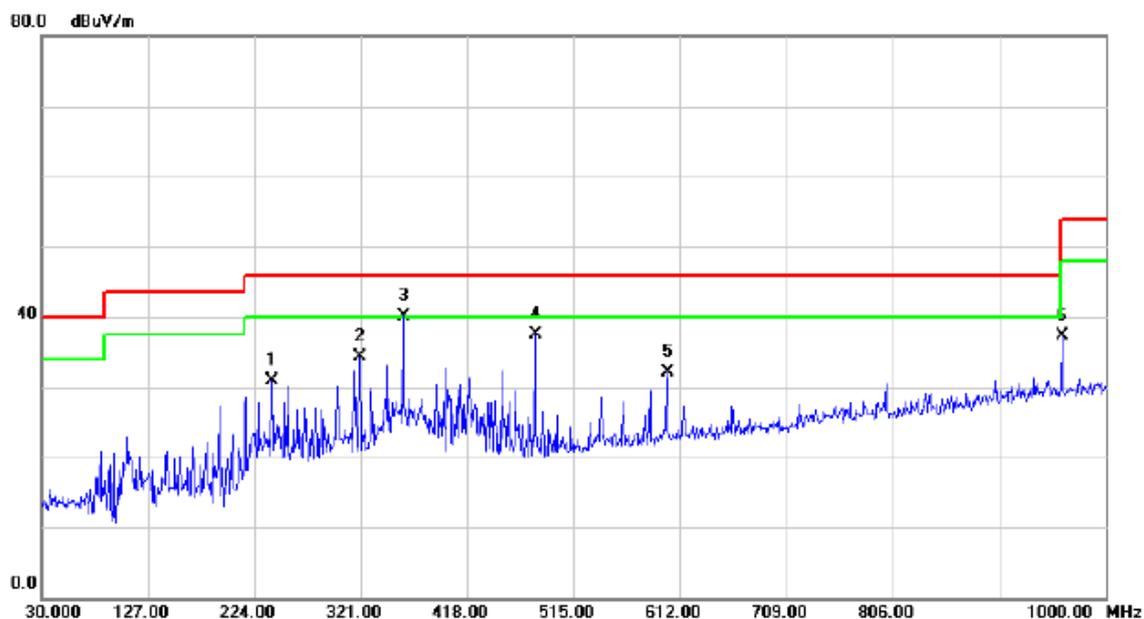

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 240.4900 | 46.13 | -15.25 | 30.88 | 46.00 | -15.12 | QP | |
| 2 | | 320.0300 | 47.18 | -12.95 | 34.23 | 46.00 | -11.77 | QP | |
| 3 | * | 359.8000 | 52.23 | -12.08 | 40.15 | 46.00 | -5.85 | QP | |
| 4 | | 480.0800 | 46.97 | -9.45 | 37.52 | 46.00 | -8.48 | QP | |
| 5 | | 600.3600 | 39.47 | -7.46 | 32.01 | 46.00 | -13.99 | QP | |
| 6 | | 960.2300 | 39.03 | -1.67 | 37.36 | 54.00 | -16.64 | QP | |

| | |
|---------------|------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Charge(Mate Pen) |


Vertical

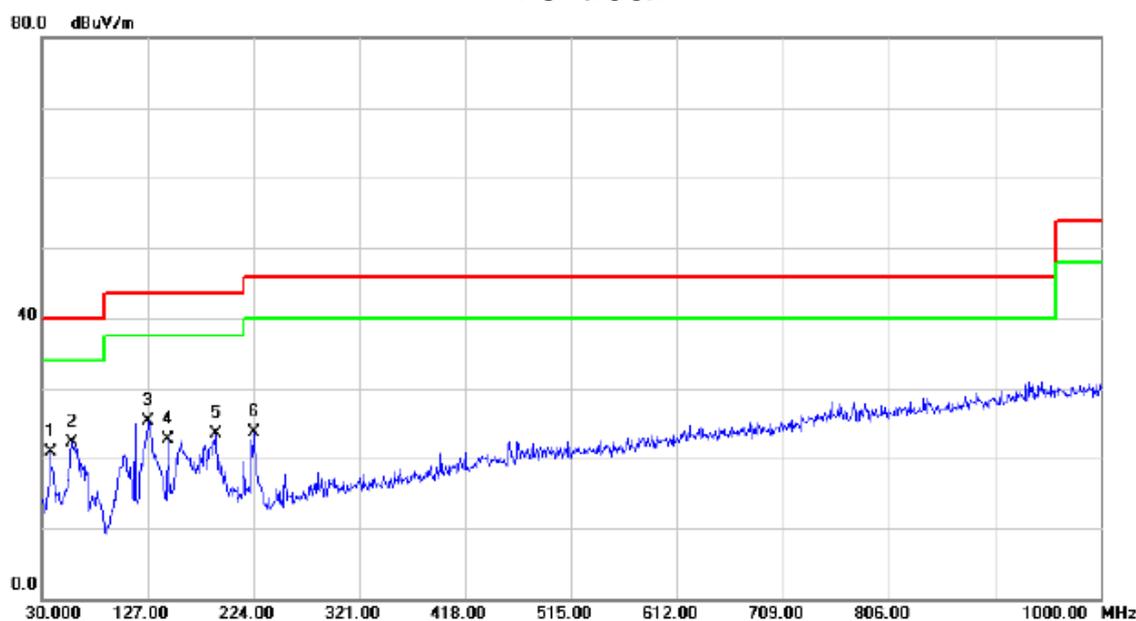

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 37.7600 | 35.46 | -14.62 | 20.84 | 40.00 | -19.16 | QP | |
| 2 | * | 57.1600 | 36.77 | -14.44 | 22.33 | 40.00 | -17.67 | QP | |
| 3 | | 127.9700 | 40.76 | -15.48 | 25.28 | 43.50 | -18.22 | QP | |
| 4 | | 145.4300 | 37.02 | -14.22 | 22.80 | 43.50 | -20.70 | QP | |
| 5 | | 189.0800 | 40.01 | -16.56 | 23.45 | 43.50 | -20.05 | QP | |
| 6 | | 224.9700 | 39.83 | -16.21 | 23.62 | 46.00 | -22.38 | QP | |

| | |
|---------------|------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Charge(Mate Pen) |

Horizontal

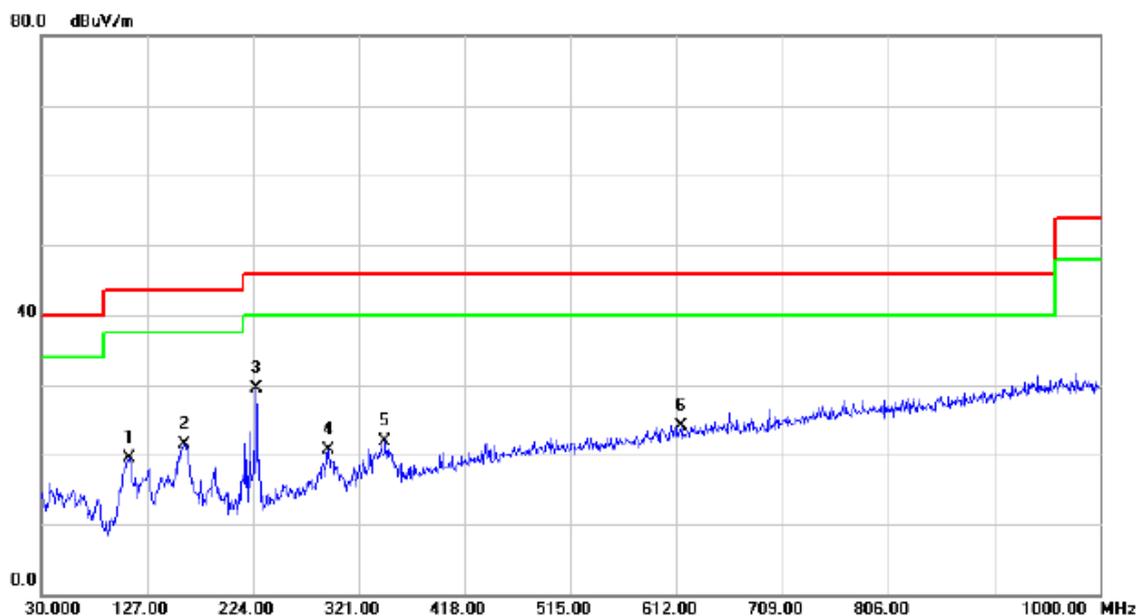


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 110.5100 | 36.83 | -17.26 | 19.57 | 43.50 | -23.93 | QP | |
| 2 | | 160.9500 | 35.54 | -13.97 | 21.57 | 43.50 | -21.93 | QP | |
| 3 | * | 226.9100 | 45.50 | -16.07 | 29.43 | 46.00 | -16.57 | QP | |
| 4 | | 292.8700 | 34.26 | -13.64 | 20.62 | 46.00 | -25.38 | QP | |
| 5 | | 345.2500 | 34.18 | -12.34 | 21.84 | 46.00 | -24.16 | QP | |
| 6 | | 615.8800 | 31.42 | -7.28 | 24.14 | 46.00 | -21.86 | QP | |

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Vertical

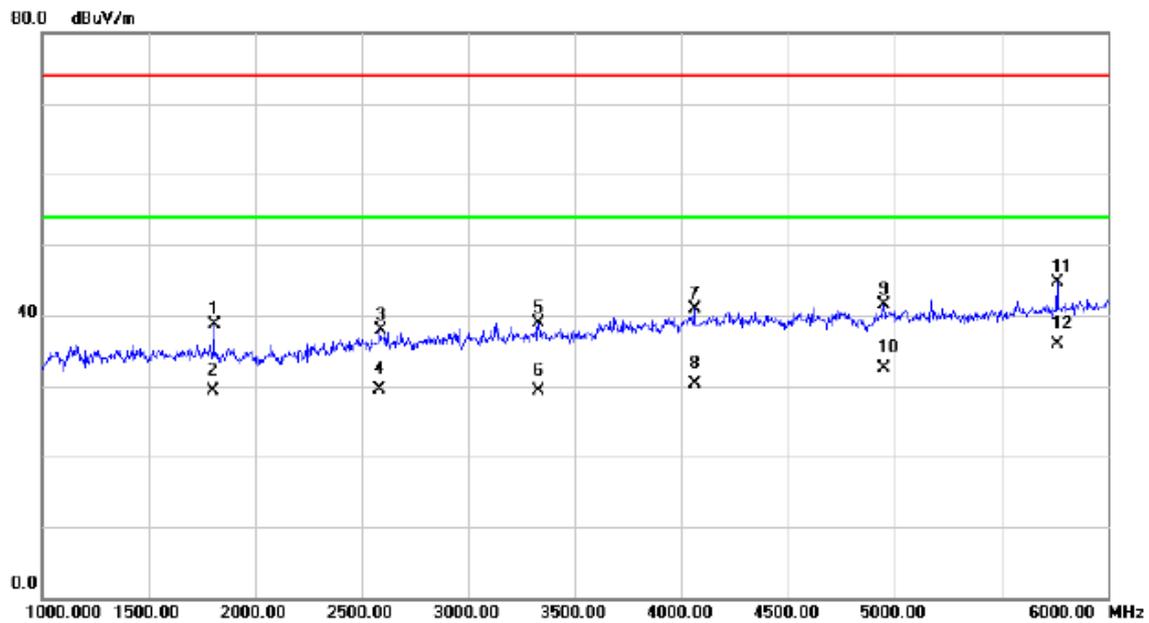

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 1807.500 | 41.97 | -3.33 | 38.64 | 74.00 | -35.36 | peak | |
| 2 | | 1807.500 | 32.69 | -3.33 | 29.36 | 54.00 | -24.64 | AVG | |
| 3 | | 2587.500 | 37.89 | -0.02 | 37.87 | 74.00 | -36.13 | peak | |
| 4 | | 2587.500 | 29.47 | -0.02 | 29.45 | 54.00 | -24.55 | AVG | |
| 5 | | 3332.500 | 36.53 | 2.45 | 38.98 | 74.00 | -35.02 | peak | |
| 6 | | 3332.500 | 26.90 | 2.45 | 29.35 | 54.00 | -24.65 | AVG | |
| 7 | | 4060.000 | 35.81 | 5.01 | 40.82 | 74.00 | -33.18 | peak | |
| 8 | | 4060.000 | 25.25 | 5.01 | 30.26 | 54.00 | -23.74 | AVG | |
| 9 | | 4952.500 | 34.29 | 7.14 | 41.43 | 74.00 | -32.57 | peak | |
| 10 | | 4952.500 | 25.42 | 7.14 | 32.56 | 54.00 | -21.44 | AVG | |
| 11 | | 5760.000 | 35.75 | 9.03 | 44.78 | 74.00 | -29.22 | peak | |
| 12 | * | 5760.000 | 26.86 | 9.03 | 35.89 | 54.00 | -18.11 | AVG | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Horizontal

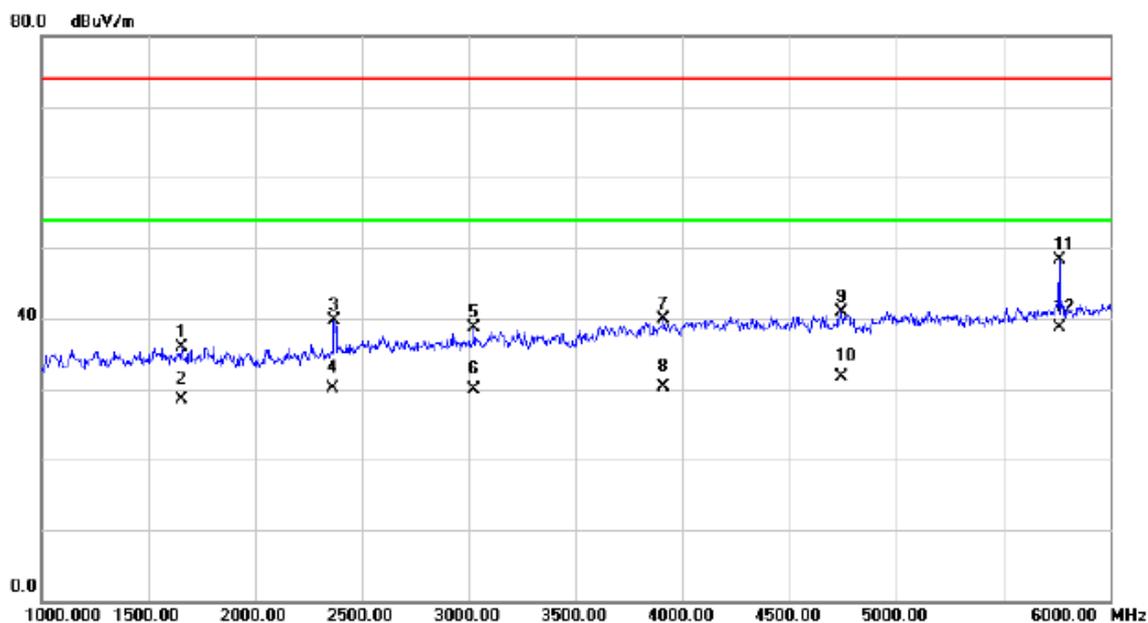

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 1655.000 | 39.47 | -3.54 | 35.93 | 74.00 | -38.07 | peak | |
| 2 | | 1655.000 | 31.95 | -3.54 | 28.41 | 54.00 | -25.59 | AVG | |
| 3 | | 2367.500 | 40.84 | -1.06 | 39.78 | 74.00 | -34.22 | peak | |
| 4 | | 2367.500 | 31.17 | -1.06 | 30.11 | 54.00 | -23.89 | AVG | |
| 5 | | 3025.000 | 37.08 | 1.55 | 38.63 | 74.00 | -35.37 | peak | |
| 6 | | 3025.000 | 28.32 | 1.55 | 29.87 | 54.00 | -24.13 | AVG | |
| 7 | | 3910.000 | 35.31 | 4.57 | 39.88 | 74.00 | -34.12 | peak | |
| 8 | | 3910.000 | 25.75 | 4.57 | 30.32 | 54.00 | -23.68 | AVG | |
| 9 | | 4745.000 | 34.44 | 6.46 | 40.90 | 74.00 | -33.10 | peak | |
| 10 | | 4745.000 | 25.31 | 6.46 | 31.77 | 54.00 | -22.23 | AVG | |
| 11 | | 5760.000 | 39.35 | 9.03 | 48.38 | 74.00 | -25.62 | peak | |
| 12 | * | 5760.000 | 29.69 | 9.03 | 38.72 | 54.00 | -15.28 | AVG | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: Coslight |


Vertical

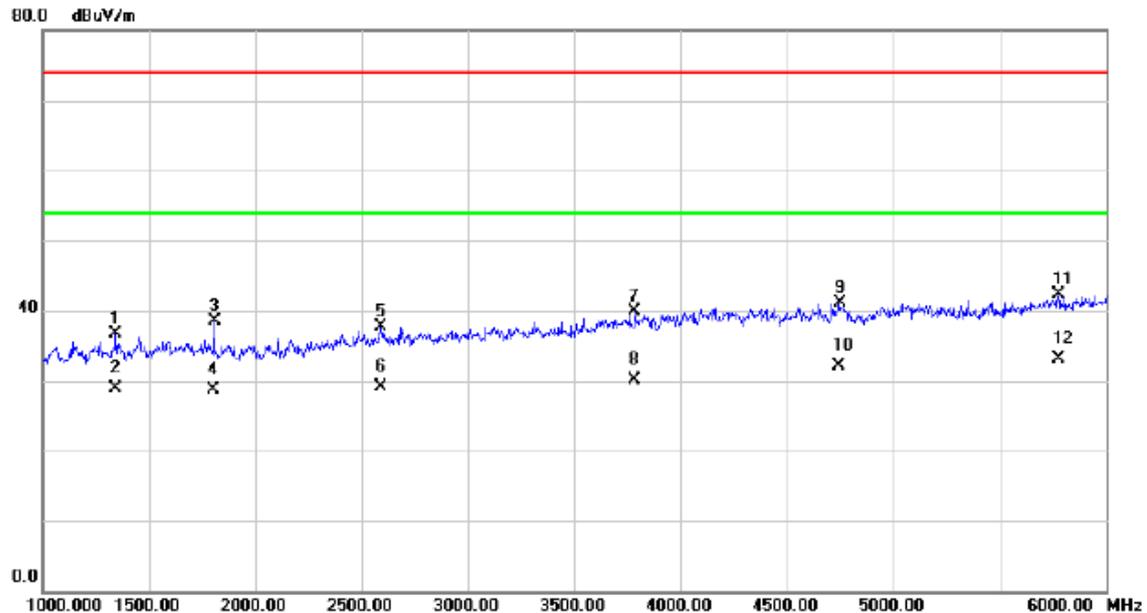

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 1345.000 | 40.87 | -4.25 | 36.62 | 74.00 | -37.38 | peak | |
| 2 | | 1345.000 | 33.18 | -4.25 | 28.93 | 54.00 | -25.07 | AVG | |
| 3 | | 1807.500 | 41.83 | -3.33 | 38.50 | 74.00 | -35.50 | peak | |
| 4 | | 1807.500 | 31.96 | -3.33 | 28.63 | 54.00 | -25.37 | AVG | |
| 5 | | 2592.500 | 37.75 | 0.00 | 37.75 | 74.00 | -36.25 | peak | |
| 6 | | 2592.500 | 29.14 | 0.00 | 29.14 | 54.00 | -24.86 | AVG | |
| 7 | | 3785.000 | 35.88 | 4.07 | 39.95 | 74.00 | -34.05 | peak | |
| 8 | | 3785.000 | 26.12 | 4.07 | 30.19 | 54.00 | -23.81 | AVG | |
| 9 | | 4747.500 | 34.65 | 6.46 | 41.11 | 74.00 | -32.89 | peak | |
| 10 | | 4747.500 | 25.61 | 6.46 | 32.07 | 54.00 | -21.93 | AVG | |
| 11 | | 5777.500 | 33.19 | 9.11 | 42.30 | 74.00 | -31.70 | peak | |
| 12 | * | 5777.500 | 24.07 | 9.11 | 33.18 | 54.00 | -20.82 | AVG | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: Coslight |


Horizontal

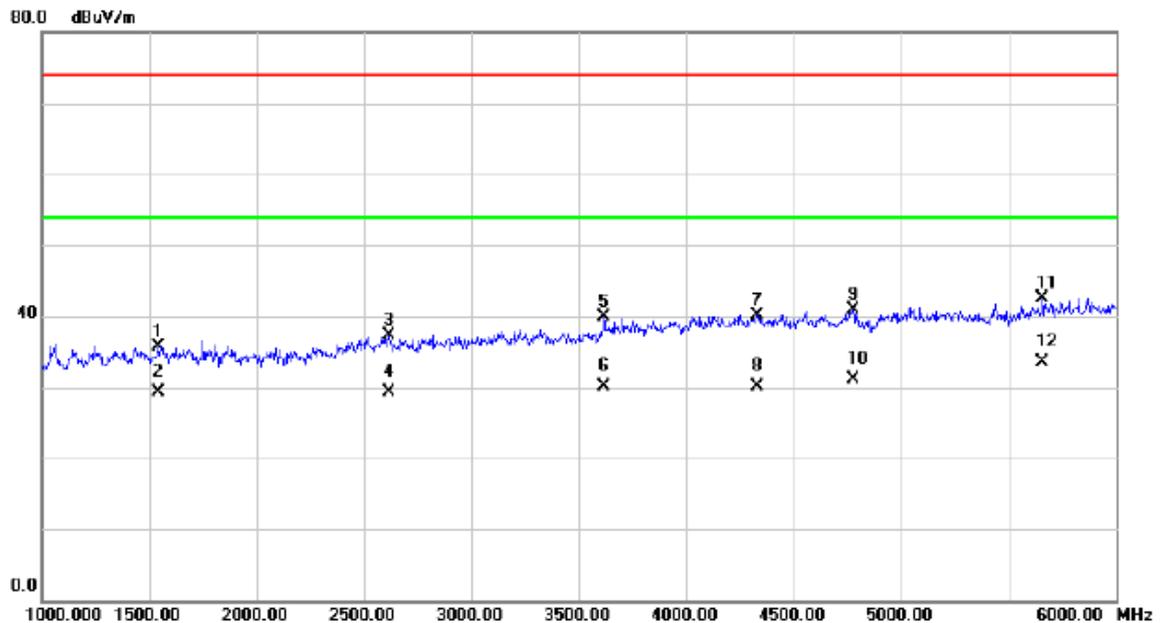

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 1542.500 | 39.39 | -3.70 | 35.69 | 74.00 | -38.31 | peak | |
| 2 | | 1542.500 | 32.91 | -3.70 | 29.21 | 54.00 | -24.79 | AVG | |
| 3 | | 2617.500 | 37.15 | 0.09 | 37.24 | 74.00 | -36.76 | peak | |
| 4 | | 2617.500 | 29.24 | 0.09 | 29.33 | 54.00 | -24.67 | AVG | |
| 5 | | 3615.000 | 36.44 | 3.39 | 39.83 | 74.00 | -34.17 | peak | |
| 6 | | 3615.000 | 26.78 | 3.39 | 30.17 | 54.00 | -23.83 | AVG | |
| 7 | | 4332.500 | 34.64 | 5.41 | 40.05 | 74.00 | -33.95 | peak | |
| 8 | | 4332.500 | 24.75 | 5.41 | 30.16 | 54.00 | -23.84 | AVG | |
| 9 | | 4775.000 | 34.29 | 6.56 | 40.85 | 74.00 | -33.15 | peak | |
| 10 | | 4775.000 | 24.49 | 6.56 | 31.05 | 54.00 | -22.95 | AVG | |
| 11 | | 5657.500 | 33.92 | 8.62 | 42.54 | 74.00 | -31.46 | peak | |
| 12 | * | 5657.500 | 24.89 | 8.62 | 33.51 | 54.00 | -20.49 | AVG | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: SALCOMP +Battery: Sunwoda |


Vertical

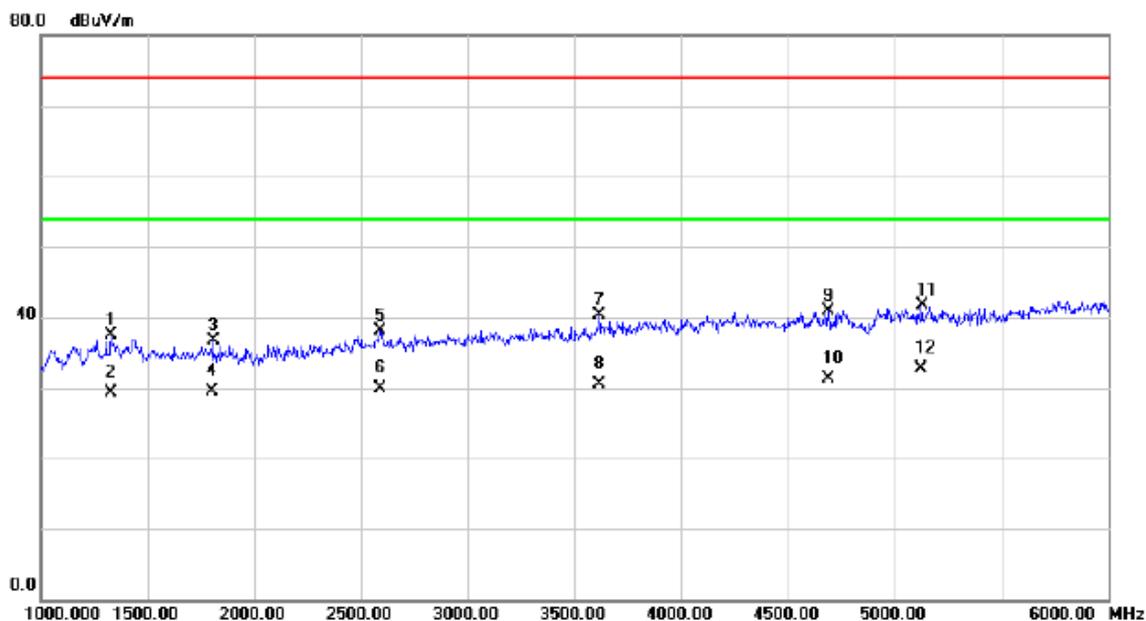

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 1330.000 | 41.85 | -4.29 | 37.56 | 74.00 | -36.44 | peak | |
| 2 | | 1330.000 | 33.67 | -4.29 | 29.38 | 54.00 | -24.62 | AVG | |
| 3 | | 1807.500 | 40.04 | -3.33 | 36.71 | 74.00 | -37.29 | peak | |
| 4 | | 1807.500 | 32.78 | -3.33 | 29.45 | 54.00 | -24.55 | AVG | |
| 5 | | 2590.000 | 38.16 | -0.01 | 38.15 | 74.00 | -35.85 | peak | |
| 6 | | 2590.000 | 29.86 | -0.01 | 29.85 | 54.00 | -24.15 | AVG | |
| 7 | | 3615.000 | 36.91 | 3.39 | 40.30 | 74.00 | -33.70 | peak | |
| 8 | | 3615.000 | 27.09 | 3.39 | 30.48 | 54.00 | -23.52 | AVG | |
| 9 | | 4692.500 | 34.53 | 6.28 | 40.81 | 74.00 | -33.19 | peak | |
| 10 | | 4692.500 | 24.98 | 6.28 | 31.26 | 54.00 | -22.74 | AVG | |
| 11 | | 5127.500 | 34.15 | 7.47 | 41.62 | 74.00 | -32.38 | peak | |
| 12 | * | 5127.500 | 25.22 | 7.47 | 32.69 | 54.00 | -21.31 | AVG | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: SALCOMP +Battery: Sunwoda |


Horizontal

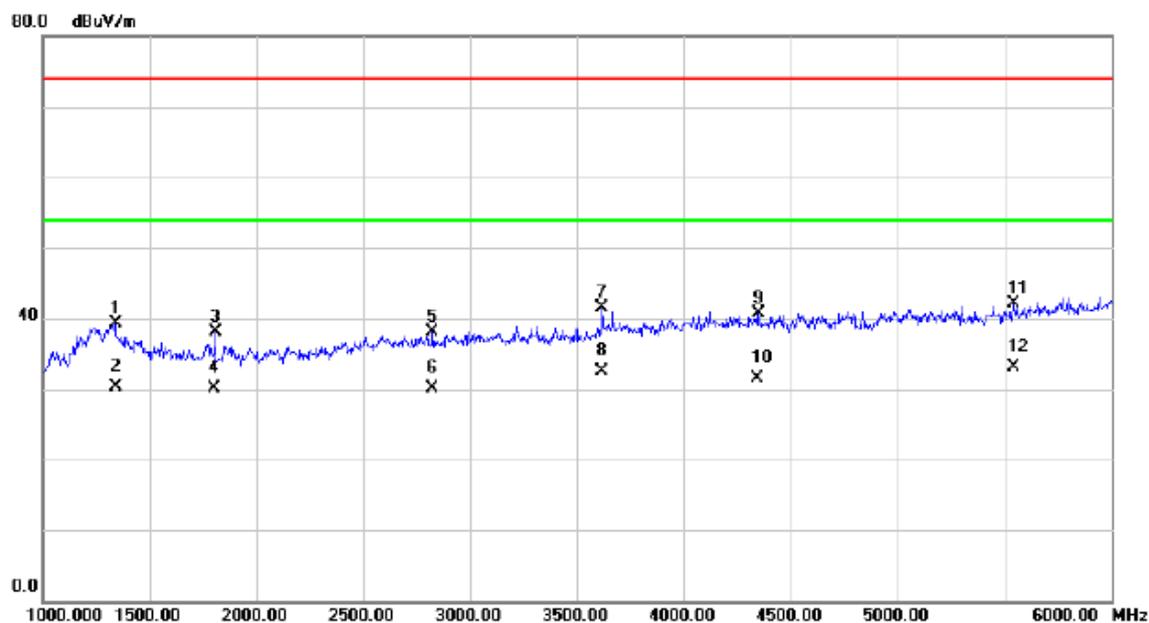

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 1342.500 | 43.65 | -4.26 | 39.39 | 74.00 | -34.61 | peak | |
| 2 | | 1342.500 | 34.54 | -4.26 | 30.28 | 54.00 | -23.72 | AVG | |
| 3 | | 1807.500 | 41.40 | -3.33 | 38.07 | 74.00 | -35.93 | peak | |
| 4 | | 1807.500 | 33.43 | -3.33 | 30.10 | 54.00 | -23.90 | AVG | |
| 5 | | 2825.000 | 37.36 | 0.83 | 38.19 | 74.00 | -35.81 | peak | |
| 6 | | 2825.000 | 29.20 | 0.83 | 30.03 | 54.00 | -23.97 | AVG | |
| 7 | | 3615.000 | 38.07 | 3.39 | 41.46 | 74.00 | -32.54 | peak | |
| 8 | | 3615.000 | 29.08 | 3.39 | 32.47 | 54.00 | -21.53 | AVG | |
| 9 | | 4347.500 | 35.28 | 5.43 | 40.71 | 74.00 | -33.29 | peak | |
| 10 | | 4347.500 | 26.04 | 5.43 | 31.47 | 54.00 | -22.53 | AVG | |
| 11 | | 5545.000 | 33.97 | 8.17 | 42.14 | 74.00 | -31.86 | peak | |
| 12 | * | 5545.000 | 24.99 | 8.17 | 33.16 | 54.00 | -20.84 | AVG | |

| | |
|---------------|---------------------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+5GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Vertical

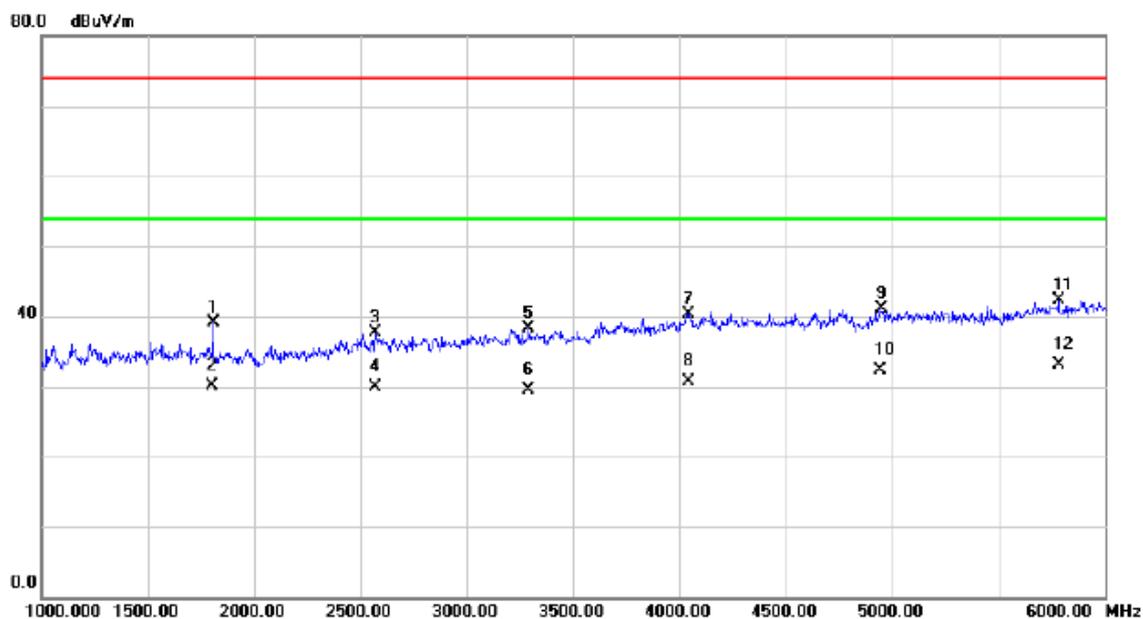

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 1807.500 | 42.53 | -3.33 | 39.20 | 74.00 | -34.80 | peak | |
| 2 | | 1807.500 | 33.36 | -3.33 | 30.03 | 54.00 | -23.97 | AVG | |
| 3 | | 2572.500 | 37.82 | -0.07 | 37.75 | 74.00 | -36.25 | peak | |
| 4 | | 2572.500 | 29.94 | -0.07 | 29.87 | 54.00 | -24.13 | AVG | |
| 5 | | 3292.500 | 36.01 | 2.32 | 38.33 | 74.00 | -35.67 | peak | |
| 6 | | 3292.500 | 27.12 | 2.32 | 29.44 | 54.00 | -24.56 | AVG | |
| 7 | | 4045.000 | 35.33 | 4.99 | 40.32 | 74.00 | -33.68 | peak | |
| 8 | | 4045.000 | 25.77 | 4.99 | 30.76 | 54.00 | -23.24 | AVG | |
| 9 | | 4947.500 | 34.01 | 7.11 | 41.12 | 74.00 | -32.88 | peak | |
| 10 | | 4947.500 | 25.24 | 7.11 | 32.35 | 54.00 | -21.65 | AVG | |
| 11 | | 5780.000 | 33.20 | 9.12 | 42.32 | 74.00 | -31.68 | peak | |
| 12 | * | 5780.000 | 24.06 | 9.12 | 33.18 | 54.00 | -20.82 | AVG | |

| | |
|---------------|---------------------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+5GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Horizontal

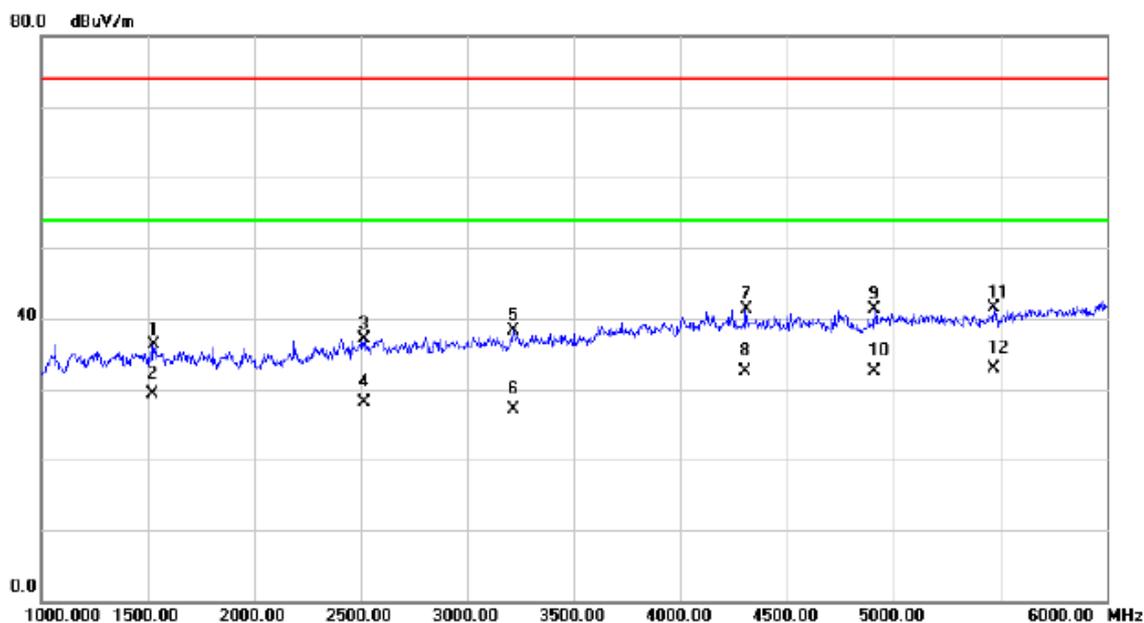

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 1527.500 | 40.06 | -3.73 | 36.33 | 74.00 | -37.67 | peak | |
| 2 | | 1527.500 | 33.04 | -3.73 | 29.31 | 54.00 | -24.69 | AVG | |
| 3 | | 2515.000 | 37.44 | -0.28 | 37.16 | 74.00 | -36.84 | peak | |
| 4 | | 2515.000 | 28.42 | -0.28 | 28.14 | 54.00 | -25.86 | AVG | |
| 5 | | 3215.000 | 36.12 | 2.10 | 38.22 | 74.00 | -35.78 | peak | |
| 6 | | 3215.000 | 25.05 | 2.10 | 27.15 | 54.00 | -26.85 | AVG | |
| 7 | | 4307.500 | 35.97 | 5.37 | 41.34 | 74.00 | -32.66 | peak | |
| 8 | | 4307.500 | 27.22 | 5.37 | 32.59 | 54.00 | -21.41 | AVG | |
| 9 | | 4912.500 | 34.25 | 7.01 | 41.26 | 74.00 | -32.74 | peak | |
| 10 | | 4912.500 | 25.42 | 7.01 | 32.43 | 54.00 | -21.57 | AVG | |
| 11 | | 5470.000 | 33.47 | 7.95 | 41.42 | 74.00 | -32.58 | peak | |
| 12 | * | 5470.000 | 24.90 | 7.95 | 32.85 | 54.00 | -21.15 | AVG | |

| | |
|---------------|--|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Speaker |
| Note: | Adapter: BYD +Battery: SCUD |


Vertical

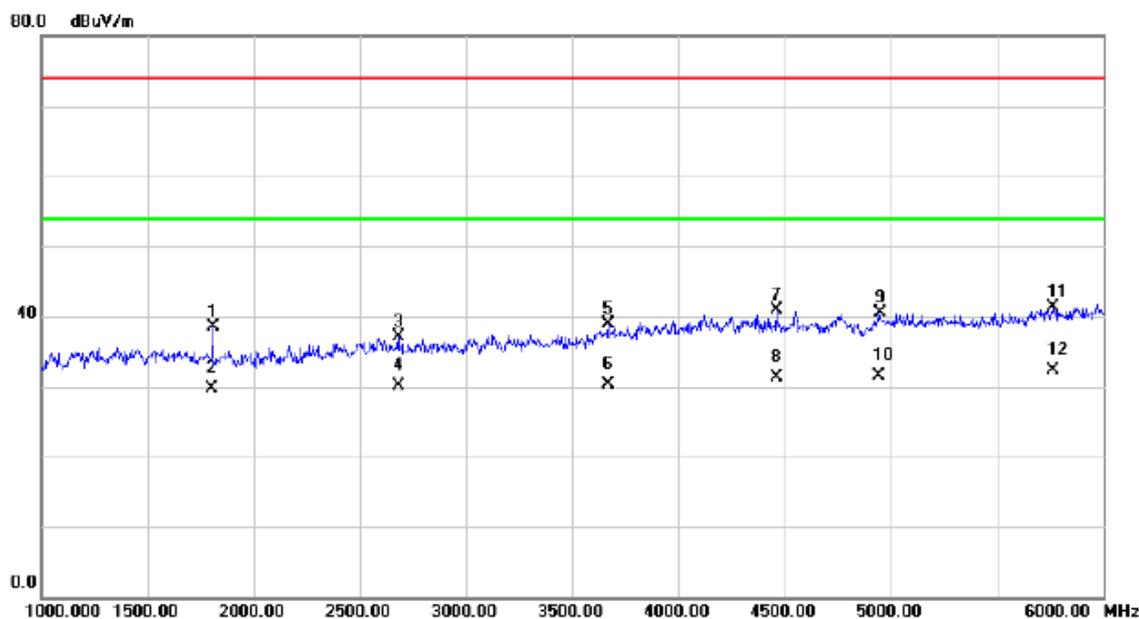

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | 1807.500 | 41.93 | -3.33 | 38.60 | 74.00 | -35.40 | peak | |
| 2 | 1807.500 | 33.02 | -3.33 | 29.69 | 54.00 | -24.31 | AVG | |
| 3 | 2680.000 | 36.75 | 0.31 | 37.06 | 74.00 | -36.94 | peak | |
| 4 | 2680.000 | 29.86 | 0.31 | 30.17 | 54.00 | -23.83 | AVG | |
| 5 | 3670.000 | 35.24 | 3.60 | 38.84 | 74.00 | -35.16 | peak | |
| 6 | 3670.000 | 26.76 | 3.60 | 30.36 | 54.00 | -23.64 | AVG | |
| 7 | 4460.000 | 35.23 | 5.60 | 40.83 | 74.00 | -33.17 | peak | |
| 8 | 4460.000 | 25.62 | 5.60 | 31.22 | 54.00 | -22.78 | AVG | |
| 9 | 4947.500 | 33.30 | 7.11 | 40.41 | 74.00 | -33.59 | peak | |
| 10 | 4947.500 | 24.36 | 7.11 | 31.47 | 54.00 | -22.53 | AVG | |
| 11 | 5765.000 | 32.18 | 9.05 | 41.23 | 74.00 | -32.77 | peak | |
| 12 * | 5765.000 | 23.23 | 9.05 | 32.28 | 54.00 | -21.72 | AVG | |

| | |
|---------------|--|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Speaker |
| Note: | Adapter: BYD +Battery: SCUD |


Horizontal

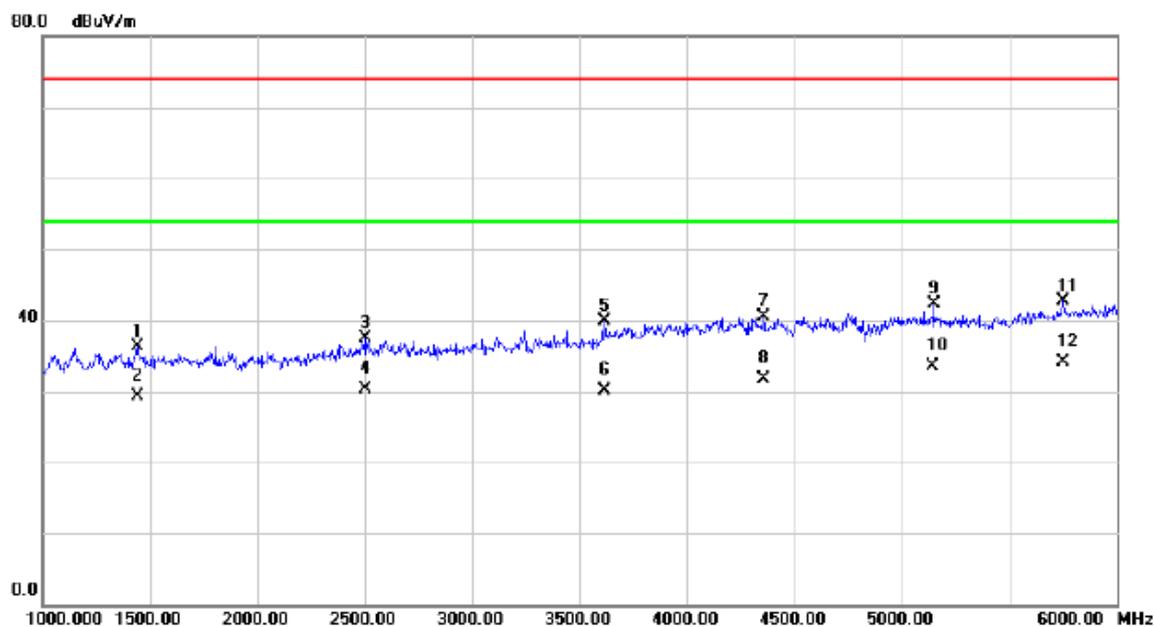

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | 1440.000 | 40.35 | -3.95 | 36.40 | 74.00 | -37.60 | peak | |
| 2 | 1440.000 | 33.31 | -3.95 | 29.36 | 54.00 | -24.64 | AVG | |
| 3 | 2505.000 | 37.85 | -0.32 | 37.53 | 74.00 | -36.47 | peak | |
| 4 | 2505.000 | 30.54 | -0.32 | 30.22 | 54.00 | -23.78 | AVG | |
| 5 | 3615.000 | 36.59 | 3.39 | 39.98 | 74.00 | -34.02 | peak | |
| 6 | 3615.000 | 26.75 | 3.39 | 30.14 | 54.00 | -23.86 | AVG | |
| 7 | 4357.500 | 35.02 | 5.44 | 40.46 | 74.00 | -33.54 | peak | |
| 8 | 4357.500 | 26.30 | 5.44 | 31.74 | 54.00 | -22.26 | AVG | |
| 9 | 5147.500 | 34.78 | 7.50 | 42.28 | 74.00 | -31.72 | peak | |
| 10 | 5147.500 | 26.08 | 7.50 | 33.58 | 54.00 | -20.42 | AVG | |
| 11 | 5750.000 | 33.71 | 9.00 | 42.71 | 74.00 | -31.29 | peak | |
| 12 * | 5750.000 | 25.12 | 9.00 | 34.12 | 54.00 | -19.88 | AVG | |

| | |
|---------------|--|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Camera on |
| Note: | Adapter: BYD +Battery: SCUD |


Vertical

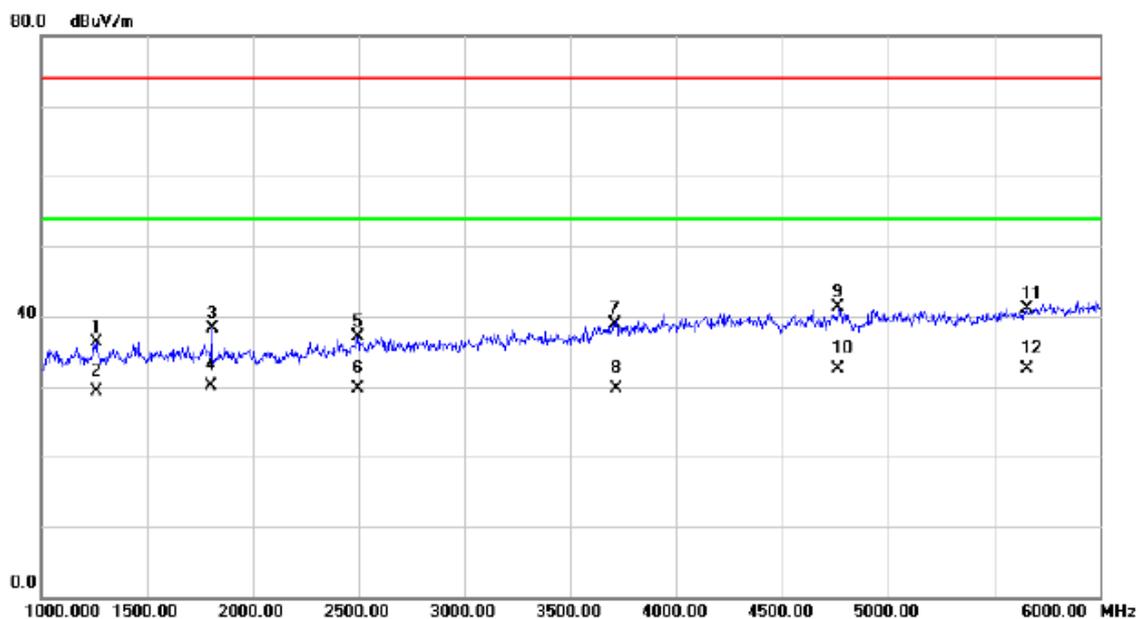

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 1262.500 | 40.92 | -4.52 | 36.40 | 74.00 | -37.60 | peak | |
| 2 | | 1262.500 | 33.88 | -4.52 | 29.36 | 54.00 | -24.64 | AVG | |
| 3 | | 1807.500 | 41.59 | -3.33 | 38.26 | 74.00 | -35.74 | peak | |
| 4 | | 1807.500 | 33.34 | -3.33 | 30.01 | 54.00 | -23.99 | AVG | |
| 5 | | 2495.000 | 37.47 | -0.37 | 37.10 | 74.00 | -36.90 | peak | |
| 6 | | 2495.000 | 30.05 | -0.37 | 29.68 | 54.00 | -24.32 | AVG | |
| 7 | | 3707.500 | 35.05 | 3.76 | 38.81 | 74.00 | -35.19 | peak | |
| 8 | | 3707.500 | 26.01 | 3.76 | 29.77 | 54.00 | -24.23 | AVG | |
| 9 | | 4765.000 | 34.78 | 6.52 | 41.30 | 74.00 | -32.70 | peak | |
| 10 | * | 4765.000 | 26.04 | 6.52 | 32.56 | 54.00 | -21.44 | AVG | |
| 11 | | 5655.000 | 32.52 | 8.62 | 41.14 | 74.00 | -32.86 | peak | |
| 12 | | 5655.000 | 23.87 | 8.62 | 32.49 | 54.00 | -21.51 | AVG | |

| | |
|---------------|--|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Camera on |
| Note: | Adapter: BYD +Battery: SCUD |


Horizontal

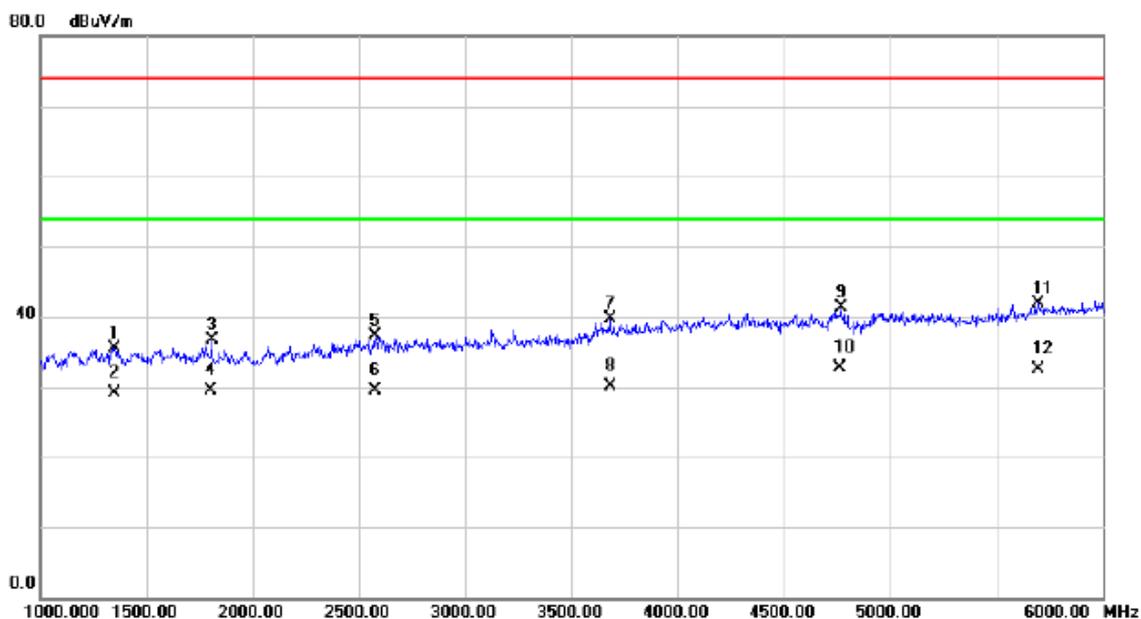

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 1350.000 | 39.83 | -4.23 | 35.60 | 74.00 | -38.40 | peak | |
| 2 | | 1350.000 | 33.31 | -4.23 | 29.08 | 54.00 | -24.92 | AVG | |
| 3 | | 1807.500 | 39.96 | -3.33 | 36.63 | 74.00 | -37.37 | peak | |
| 4 | | 1807.500 | 32.78 | -3.33 | 29.45 | 54.00 | -24.55 | AVG | |
| 5 | | 2575.000 | 37.32 | -0.07 | 37.25 | 74.00 | -36.75 | peak | |
| 6 | | 2575.000 | 29.65 | -0.07 | 29.58 | 54.00 | -24.42 | AVG | |
| 7 | | 3682.500 | 35.97 | 3.65 | 39.62 | 74.00 | -34.38 | peak | |
| 8 | | 3682.500 | 26.52 | 3.65 | 30.17 | 54.00 | -23.83 | AVG | |
| 9 | | 4767.500 | 34.68 | 6.53 | 41.21 | 74.00 | -32.79 | peak | |
| 10 | * | 4767.500 | 26.10 | 6.53 | 32.63 | 54.00 | -21.37 | AVG | |
| 11 | | 5697.500 | 33.11 | 8.78 | 41.89 | 74.00 | -32.11 | peak | |
| 12 | | 5697.500 | 23.80 | 8.78 | 32.58 | 54.00 | -21.42 | AVG | |

| | |
|---------------|-----------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | USB R/W+BT+2.4GHz WIFI |
| Note: | Adapter: BYD +Battery: SCUD |


Vertical

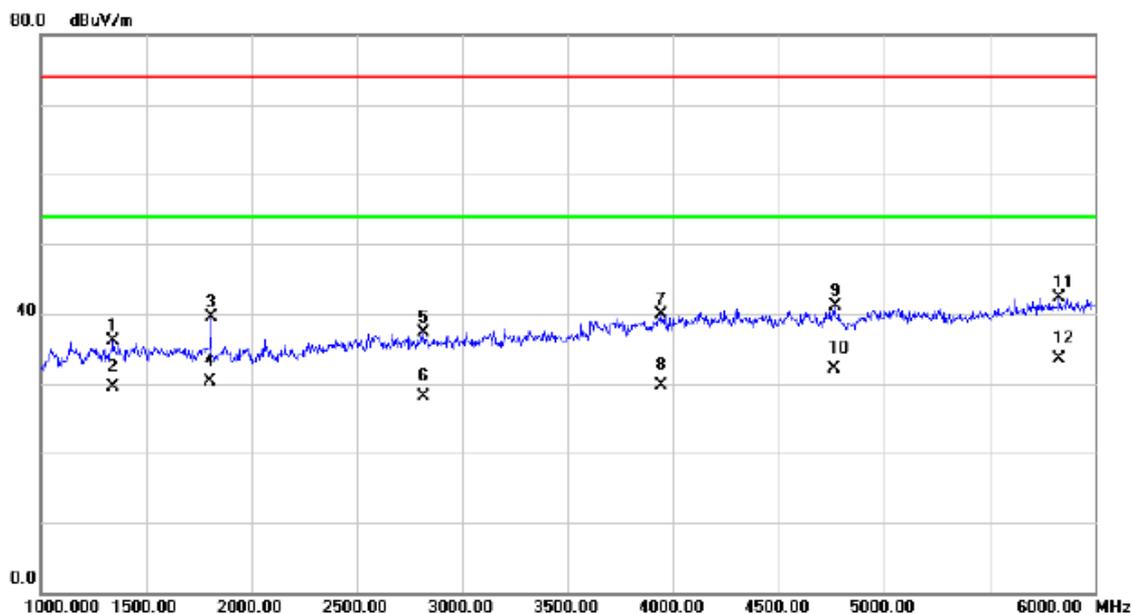

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 1345.000 | 40.38 | -4.25 | 36.13 | 74.00 | -37.87 | peak | |
| 2 | | 1345.000 | 33.66 | -4.25 | 29.41 | 54.00 | -24.59 | AVG | |
| 3 | | 1807.500 | 42.79 | -3.33 | 39.46 | 74.00 | -34.54 | peak | |
| 4 | | 1807.500 | 33.58 | -3.33 | 30.25 | 54.00 | -23.75 | AVG | |
| 5 | | 2817.500 | 36.53 | 0.81 | 37.34 | 74.00 | -36.66 | peak | |
| 6 | | 2817.500 | 27.37 | 0.81 | 28.18 | 54.00 | -25.82 | AVG | |
| 7 | | 3940.000 | 35.21 | 4.69 | 39.90 | 74.00 | -34.10 | peak | |
| 8 | | 3940.000 | 24.94 | 4.69 | 29.63 | 54.00 | -24.37 | AVG | |
| 9 | | 4767.500 | 34.53 | 6.53 | 41.06 | 74.00 | -32.94 | peak | |
| 10 | | 4767.500 | 25.65 | 6.53 | 32.18 | 54.00 | -21.82 | AVG | |
| 11 | | 5830.000 | 32.95 | 9.32 | 42.27 | 74.00 | -31.73 | peak | |
| 12 | * | 5830.000 | 24.23 | 9.32 | 33.55 | 54.00 | -20.45 | AVG | |

| | |
|---------------|-----------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | USB R/W+BT+2.4GHz WIFI |
| Note: | Adapter: BYD +Battery: SCUD |


Horizontal

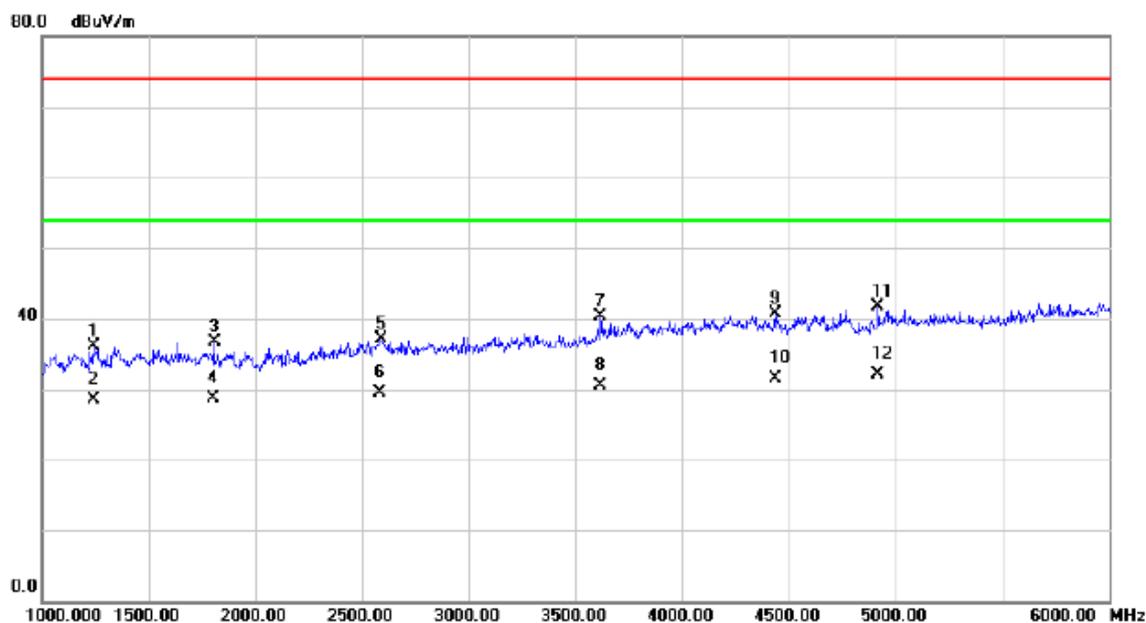

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 1242.500 | 40.67 | -4.57 | 36.10 | 74.00 | -37.90 | peak | |
| 2 | | 1242.500 | 33.04 | -4.57 | 28.47 | 54.00 | -25.53 | AVG | |
| 3 | | 1807.500 | 40.08 | -3.33 | 36.75 | 74.00 | -37.25 | peak | |
| 4 | | 1807.500 | 31.96 | -3.33 | 28.63 | 54.00 | -25.37 | AVG | |
| 5 | | 2587.500 | 37.14 | -0.02 | 37.12 | 74.00 | -36.88 | peak | |
| 6 | | 2587.500 | 29.43 | -0.02 | 29.41 | 54.00 | -24.59 | AVG | |
| 7 | | 3615.000 | 36.99 | 3.39 | 40.38 | 74.00 | -33.62 | peak | |
| 8 | | 3615.000 | 27.15 | 3.39 | 30.54 | 54.00 | -23.46 | AVG | |
| 9 | | 4435.000 | 35.05 | 5.57 | 40.62 | 74.00 | -33.38 | peak | |
| 10 | | 4435.000 | 26.01 | 5.57 | 31.58 | 54.00 | -22.42 | AVG | |
| 11 | | 4915.000 | 34.77 | 7.02 | 41.79 | 74.00 | -32.21 | peak | |
| 12 | * | 4915.000 | 25.09 | 7.02 | 32.11 | 54.00 | -21.89 | AVG | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Vertical

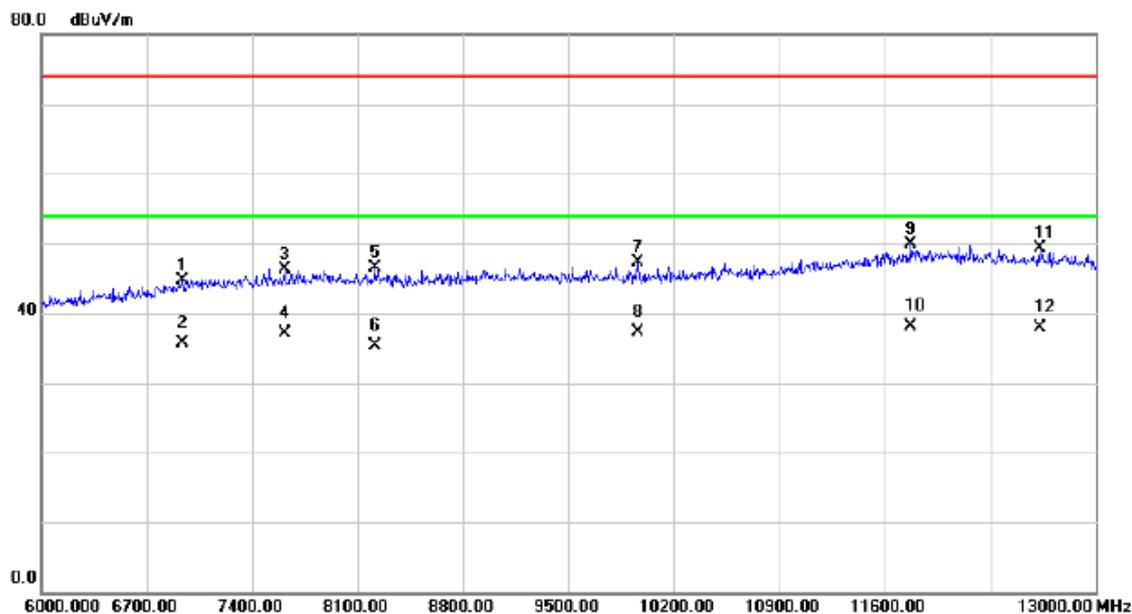

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | 6938.000 | 31.80 | 12.89 | 44.69 | 74.00 | -29.31 | peak | |
| 2 | 6938.000 | 22.80 | 12.89 | 35.69 | 54.00 | -18.31 | AVG | |
| 3 | 7617.000 | 32.37 | 13.95 | 46.32 | 74.00 | -27.68 | peak | |
| 4 | 7617.000 | 23.16 | 13.95 | 37.11 | 54.00 | -16.89 | AVG | |
| 5 | 8212.000 | 32.04 | 14.45 | 46.49 | 74.00 | -27.51 | peak | |
| 6 | 8212.000 | 20.84 | 14.45 | 35.29 | 54.00 | -18.71 | AVG | |
| 7 | 9962.000 | 31.97 | 15.40 | 47.37 | 74.00 | -26.63 | peak | |
| 8 | 9962.000 | 21.86 | 15.40 | 37.26 | 54.00 | -16.74 | AVG | |
| 9 | 11775.00 | 29.72 | 20.21 | 49.93 | 74.00 | -24.07 | peak | |
| 10 * | 11775.00 | 17.92 | 20.21 | 38.13 | 54.00 | -15.87 | AVG | |
| 11 | 12632.50 | 28.19 | 21.07 | 49.26 | 74.00 | -24.74 | peak | |
| 12 | 12632.50 | 16.93 | 21.07 | 38.00 | 54.00 | -16.00 | AVG | |

| | |
|---------------|---|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+2.4GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Horizontal

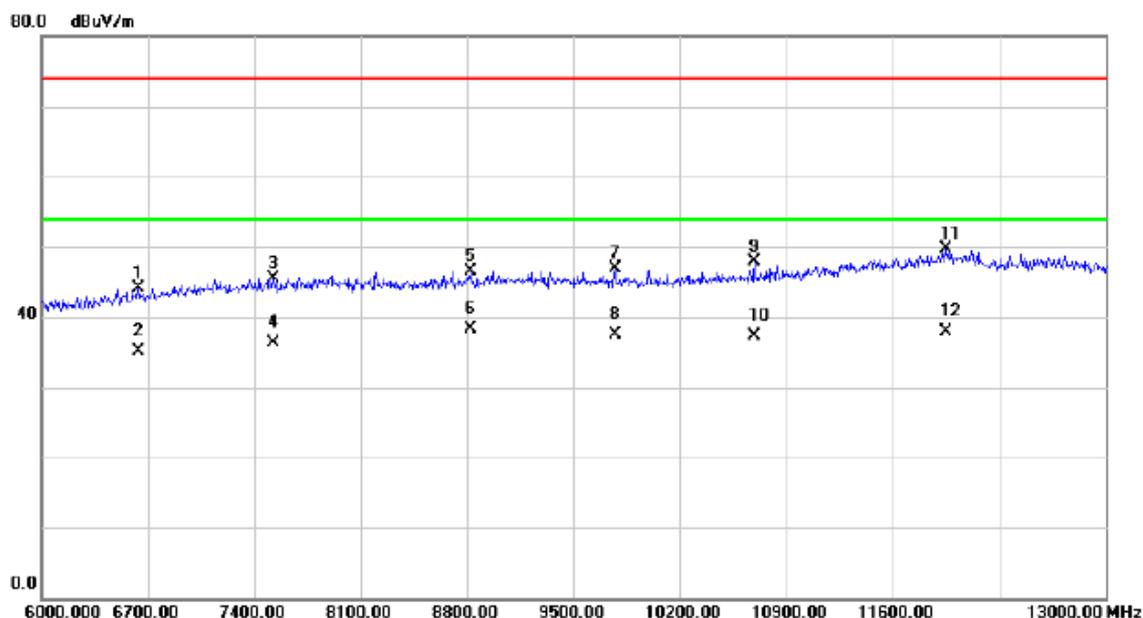

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 6640.500 | 32.53 | 11.63 | 44.16 | 74.00 | -29.84 | peak | |
| 2 | | 6640.500 | 23.56 | 11.63 | 35.19 | 54.00 | -18.81 | AVG | |
| 3 | | 7529.500 | 31.66 | 13.83 | 45.49 | 74.00 | -28.51 | peak | |
| 4 | | 7529.500 | 22.45 | 13.83 | 36.28 | 54.00 | -17.72 | AVG | |
| 5 | | 8821.000 | 31.60 | 15.00 | 46.60 | 74.00 | -27.40 | peak | |
| 6 | * | 8821.000 | 23.35 | 15.00 | 38.35 | 54.00 | -15.65 | AVG | |
| 7 | | 9776.500 | 31.51 | 15.40 | 46.91 | 74.00 | -27.09 | peak | |
| 8 | | 9776.500 | 22.06 | 15.40 | 37.46 | 54.00 | -16.54 | AVG | |
| 9 | | 10693.50 | 30.66 | 17.17 | 47.83 | 74.00 | -26.17 | peak | |
| 10 | | 10693.50 | 20.12 | 17.17 | 37.29 | 54.00 | -16.71 | AVG | |
| 11 | | 11953.50 | 28.92 | 20.70 | 49.62 | 74.00 | -24.38 | peak | |
| 12 | | 11953.50 | 17.18 | 20.70 | 37.88 | 54.00 | -16.12 | AVG | |

| | |
|---------------|---------------------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+5GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Vertical

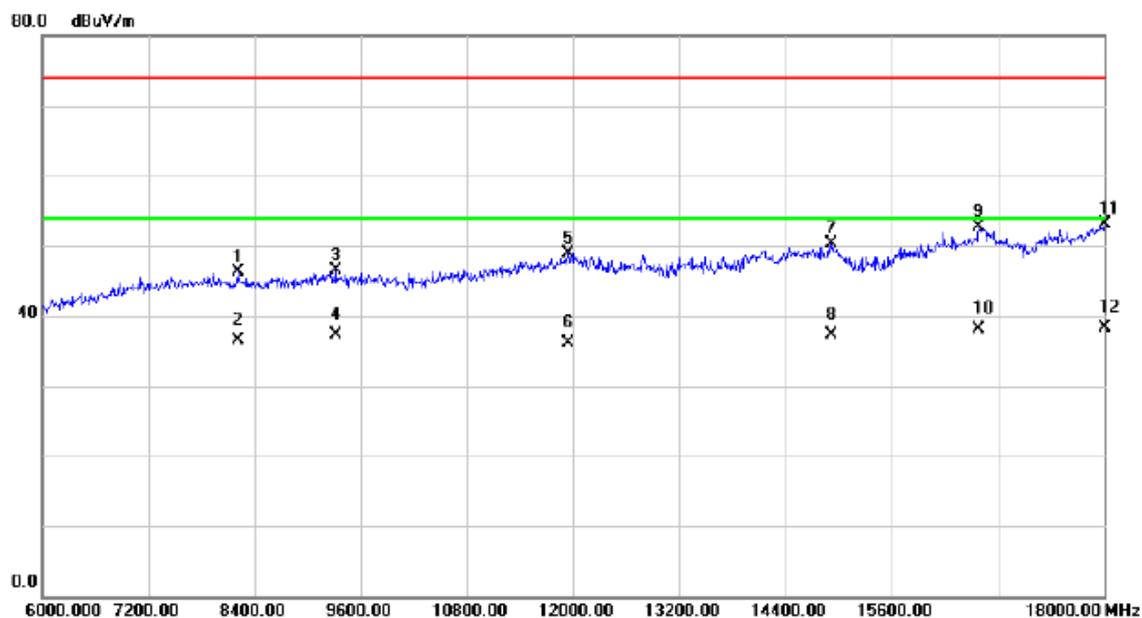

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 8214.000 | 31.84 | 14.46 | 46.30 | 74.00 | -27.70 | peak | |
| 2 | | 8214.000 | 22.01 | 14.46 | 36.47 | 54.00 | -17.53 | AVG | |
| 3 | | 9312.000 | 31.06 | 15.38 | 46.44 | 74.00 | -27.56 | peak | |
| 4 | | 9312.000 | 21.88 | 15.38 | 37.26 | 54.00 | -16.74 | AVG | |
| 5 | | 11946.00 | 28.28 | 20.67 | 48.95 | 74.00 | -25.05 | peak | |
| 6 | | 11946.00 | 15.50 | 20.67 | 36.17 | 54.00 | -17.83 | AVG | |
| 7 | | 14922.00 | 27.35 | 23.01 | 50.36 | 74.00 | -23.64 | peak | |
| 8 | | 14922.00 | 14.25 | 23.01 | 37.26 | 54.00 | -16.74 | AVG | |
| 9 | | 16590.00 | 27.98 | 24.68 | 52.66 | 74.00 | -21.34 | peak | |
| 10 | | 16590.00 | 13.43 | 24.68 | 38.11 | 54.00 | -15.89 | AVG | |
| 11 | | 18000.00 | 21.53 | 31.60 | 53.13 | 74.00 | -20.87 | peak | |
| 12 | * | 18000.00 | 6.75 | 31.60 | 38.35 | 54.00 | -15.65 | AVG | |

| | |
|---------------|---------------------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+5GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Horizontal

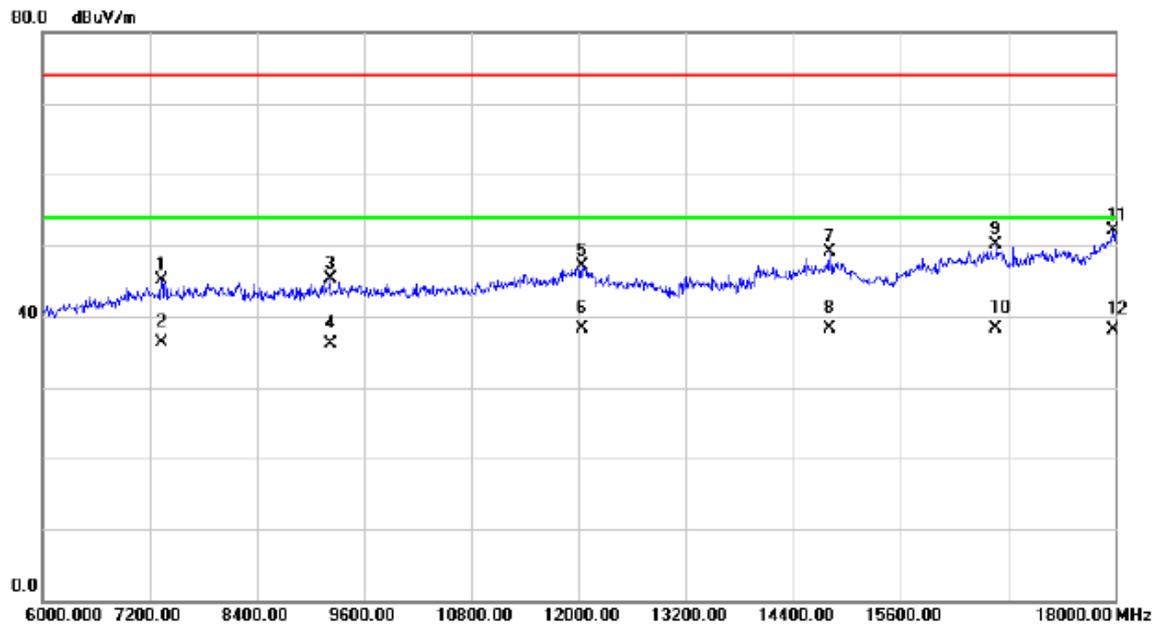

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 7332.000 | 31.46 | 13.58 | 45.04 | 74.00 | -28.96 | peak | |
| 2 | | 7332.000 | 22.63 | 13.58 | 36.21 | 54.00 | -17.79 | AVG | |
| 3 | | 9216.000 | 29.84 | 15.37 | 45.21 | 74.00 | -28.79 | peak | |
| 4 | | 9216.000 | 20.80 | 15.37 | 36.17 | 54.00 | -17.83 | AVG | |
| 5 | | 12036.00 | 26.23 | 20.82 | 47.05 | 74.00 | -26.95 | peak | |
| 6 | | 12036.00 | 17.44 | 20.82 | 38.26 | 54.00 | -15.74 | AVG | |
| 7 | | 14814.00 | 25.90 | 23.12 | 49.02 | 74.00 | -24.98 | peak | |
| 8 | * | 14814.00 | 15.24 | 23.12 | 38.36 | 54.00 | -15.64 | AVG | |
| 9 | | 16668.00 | 25.21 | 24.85 | 50.06 | 74.00 | -23.94 | peak | |
| 10 | | 16668.00 | 13.51 | 24.85 | 38.36 | 54.00 | -15.64 | AVG | |
| 11 | | 17982.00 | 20.64 | 31.47 | 52.11 | 74.00 | -21.89 | peak | |
| 12 | | 17982.00 | 6.69 | 31.47 | 38.16 | 54.00 | -15.84 | AVG | |

| | |
|---------------|---------------------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+5GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Vertical

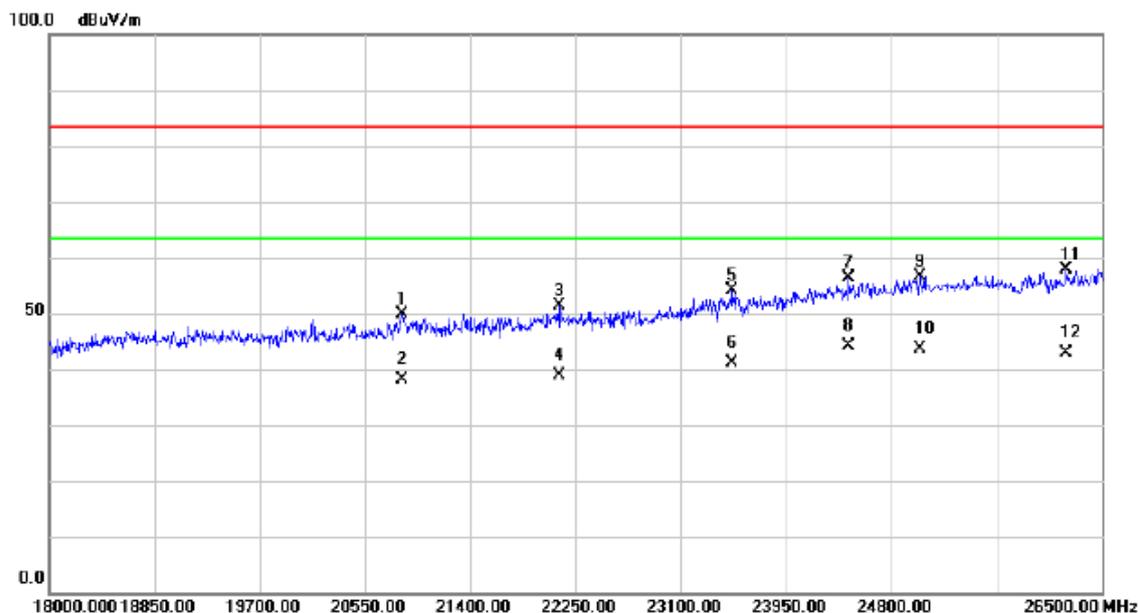

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | 20847.50 | 29.75 | 20.05 | 49.80 | 83.50 | -33.70 | peak | |
| 2 | 20847.50 | 18.10 | 20.05 | 38.15 | 63.50 | -25.35 | AVG | |
| 3 | 22122.50 | 29.80 | 21.53 | 51.33 | 83.50 | -32.17 | peak | |
| 4 | 22122.50 | 17.30 | 21.53 | 38.83 | 63.50 | -24.67 | AVG | |
| 5 | 23516.50 | 29.83 | 24.28 | 54.11 | 83.50 | -29.39 | peak | |
| 6 | 23516.50 | 16.90 | 24.28 | 41.18 | 63.50 | -22.32 | AVG | |
| 7 | 24451.50 | 30.71 | 25.60 | 56.31 | 83.50 | -27.19 | peak | |
| 8 * | 24451.50 | 18.50 | 25.60 | 44.10 | 63.50 | -19.40 | AVG | |
| 9 | 25029.50 | 30.43 | 26.22 | 56.65 | 83.50 | -26.85 | peak | |
| 10 | 25029.50 | 17.40 | 26.22 | 43.62 | 63.50 | -19.88 | AVG | |
| 11 | 26211.00 | 30.65 | 27.30 | 57.95 | 83.50 | -25.55 | peak | |
| 12 | 26211.00 | 15.50 | 27.30 | 42.80 | 63.50 | -20.70 | AVG | |

| | |
|---------------|---------------------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+5GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Horizontal

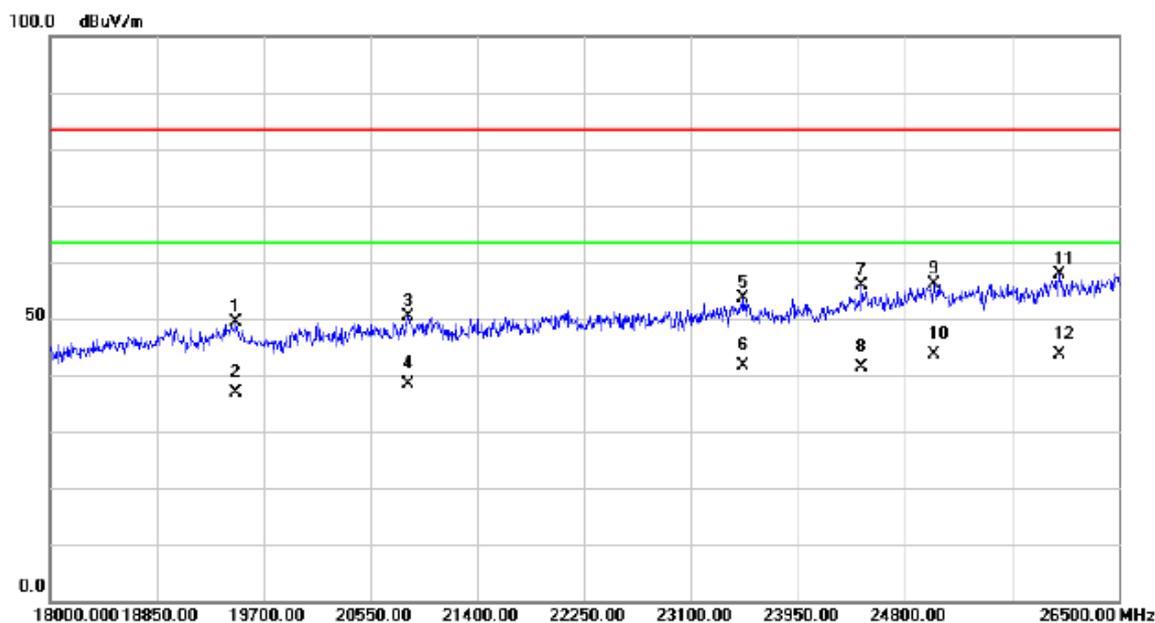

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 19479.00 | 29.41 | 20.03 | 49.44 | 83.50 | -34.06 | peak | |
| 2 | | 19479.00 | 16.90 | 20.03 | 36.93 | 63.50 | -26.57 | AVG | |
| 3 | | 20847.50 | 30.25 | 20.05 | 50.30 | 83.50 | -33.20 | peak | |
| 4 | | 20847.50 | 18.40 | 20.05 | 38.45 | 63.50 | -25.05 | AVG | |
| 5 | | 23516.50 | 29.33 | 24.28 | 53.61 | 83.50 | -29.89 | peak | |
| 6 | | 23516.50 | 17.30 | 24.28 | 41.58 | 63.50 | -21.92 | AVG | |
| 7 | | 24451.50 | 30.21 | 25.60 | 55.81 | 83.50 | -27.69 | peak | |
| 8 | | 24451.50 | 15.80 | 25.60 | 41.40 | 63.50 | -22.10 | AVG | |
| 9 | | 25029.50 | 29.93 | 26.22 | 56.15 | 83.50 | -27.35 | peak | |
| 10 | * | 25029.50 | 17.50 | 26.22 | 43.72 | 63.50 | -19.78 | AVG | |
| 11 | | 26032.50 | 30.87 | 27.02 | 57.89 | 83.50 | -25.61 | peak | |
| 12 | | 26032.50 | 16.70 | 27.02 | 43.72 | 63.50 | -19.78 | AVG | |

| | |
|---------------|---------------------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+5GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |


Vertical

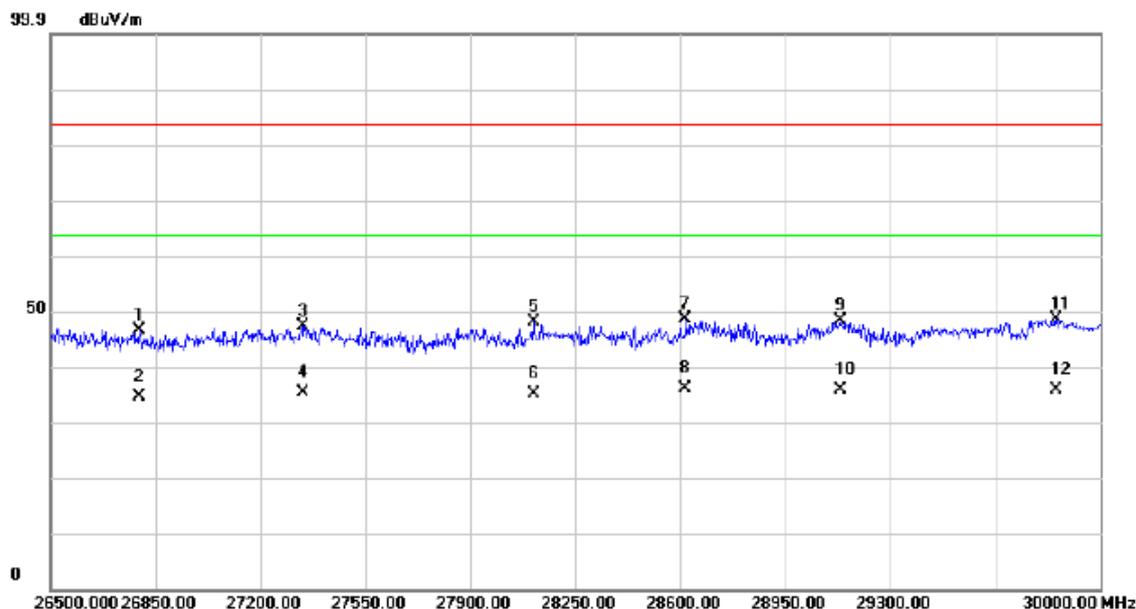

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 26794.00 | 42.85 | 3.73 | 46.58 | 83.50 | -36.92 | peak | |
| 2 | | 26794.00 | 30.90 | 3.73 | 34.63 | 63.50 | -28.87 | AVG | |
| 3 | | 27340.00 | 43.72 | 3.58 | 47.30 | 83.50 | -36.20 | peak | |
| 4 | | 27340.00 | 31.80 | 3.58 | 35.38 | 63.50 | -28.12 | AVG | |
| 5 | | 28110.00 | 43.67 | 4.34 | 48.01 | 83.50 | -35.49 | peak | |
| 6 | | 28110.00 | 30.60 | 4.34 | 34.94 | 63.50 | -28.56 | AVG | |
| 7 | | 28617.50 | 43.28 | 5.18 | 48.46 | 83.50 | -35.04 | peak | |
| 8 | * | 28617.50 | 30.80 | 5.18 | 35.98 | 63.50 | -27.52 | AVG | |
| 9 | | 29132.00 | 42.17 | 6.15 | 48.32 | 83.50 | -35.18 | peak | |
| 10 | | 29132.00 | 29.70 | 6.15 | 35.85 | 63.50 | -27.65 | AVG | |
| 11 | | 29853.00 | 41.00 | 7.45 | 48.45 | 83.50 | -35.05 | peak | |
| 12 | | 29853.00 | 28.30 | 7.45 | 35.75 | 63.50 | -27.75 | AVG | |

| | |
|---------------|---------------------------------------|
| Test Voltage: | AC 120V/60Hz |
| Test Mode: | Adapter+BT+5GHz WIFI+Playing+Earphone |
| Note: | Adapter: BYD +Battery: SCUD |

Horizontal

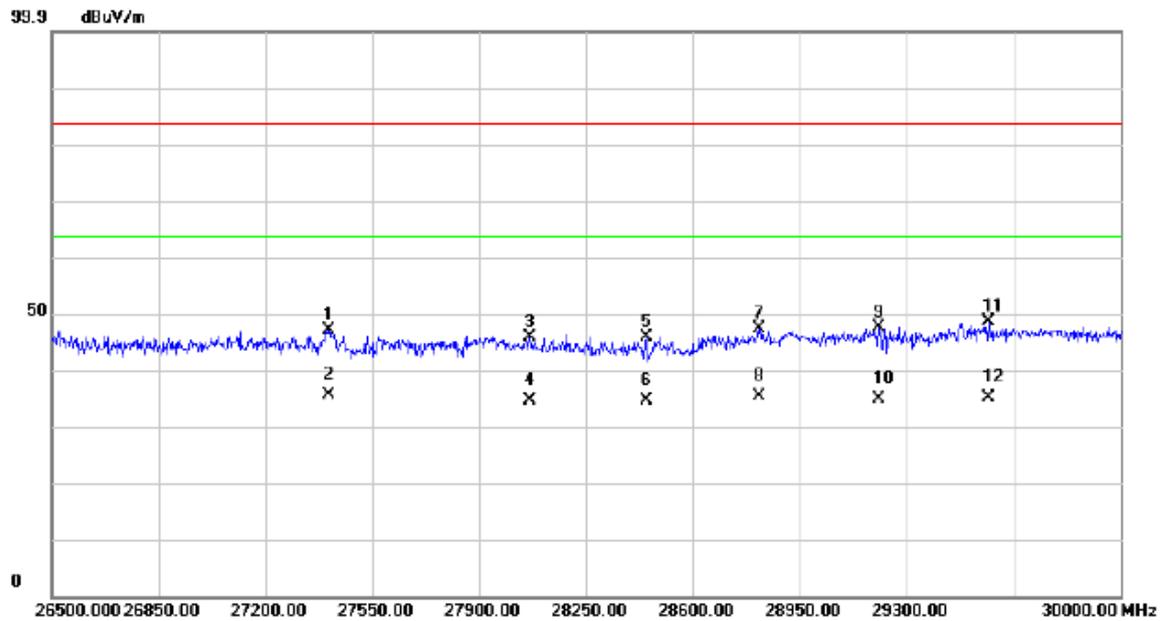

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 27406.50 | 43.45 | 3.53 | 46.98 | 83.50 | -36.52 | peak | |
| 2 | * | 27406.50 | 31.90 | 3.53 | 35.43 | 63.50 | -28.07 | AVG | |
| 3 | | 28064.50 | 41.46 | 4.26 | 45.72 | 83.50 | -37.78 | peak | |
| 4 | | 28064.50 | 30.30 | 4.26 | 34.56 | 63.50 | -28.94 | AVG | |
| 5 | | 28446.00 | 41.03 | 4.86 | 45.89 | 83.50 | -37.61 | peak | |
| 6 | | 28446.00 | 29.70 | 4.86 | 34.56 | 63.50 | -28.94 | AVG | |
| 7 | | 28817.00 | 41.83 | 5.57 | 47.40 | 83.50 | -36.10 | peak | |
| 8 | | 28817.00 | 29.60 | 5.57 | 35.17 | 63.50 | -28.33 | AVG | |
| 9 | | 29209.00 | 41.25 | 6.27 | 47.52 | 83.50 | -35.98 | peak | |
| 10 | | 29209.00 | 28.50 | 6.27 | 34.77 | 63.50 | -28.73 | AVG | |
| 11 | | 29566.00 | 41.71 | 6.86 | 48.57 | 83.50 | -34.93 | peak | |
| 12 | | 29566.00 | 28.10 | 6.86 | 34.96 | 63.50 | -28.54 | AVG | |