



# Appendix for test report



## 1Appendix\_A: Effective (Isotropic) Radiated Power Output Data

### Part I - Test Results

VOID



## 2Appendix\_B: Peak-to-Average Ratio

### Part I - Test Results

VOID



## 3Appendix\_C: Modulation Characteristics

### Part I - Test Plots

VOID



## 4Appendix\_D: Bandwidth

### Part I - Test Results

VOID



## 5Appendix\_E: Band Edges Compliance

### Part I - Test Plots

VOID



## 6Appendix\_F: Spurious Emission at Antenna Terminal

NOTE: For the averaged unwanted emissions measurements, the measurement points in each sweep is greater than twice the Span/RBW in order to ensure bin-to-bin spacing of  $< RBW/2$  so that narrowband signals are not lost between frequency bins. As to the present test item, the "Measurement Points =  $k * (Span / RBW)$ " with  $k$  between 4 and 5, which results in an acceptable level error of less than 0.5 dB.

### Part I - Test Plots

VOID

## 7Appendix\_G: Field Strength of Spurious Radiation

Note: We tested all modes, but the data presented below is the worst case.

9kHz~150kHz, VBW = 200Hz, VBW = 600 Hz, Detector: PK

150kHz~30MHz, VBW = 9kHz, VBW = 30k Hz, Detector: PK

30MHz~1GHz, RBW = 100 kHz, VBW = 300 kHz. Detector: PK


Above 1GHz, RBW = 1 MHz, VBW = 3 MHz. Detector: PK

### Part I - Test Plots


#### 7.1 For LTE

##### 7.1.1 Test Band = BAND5


##### 7.1.1.1 Test Bandwidth = 1.4

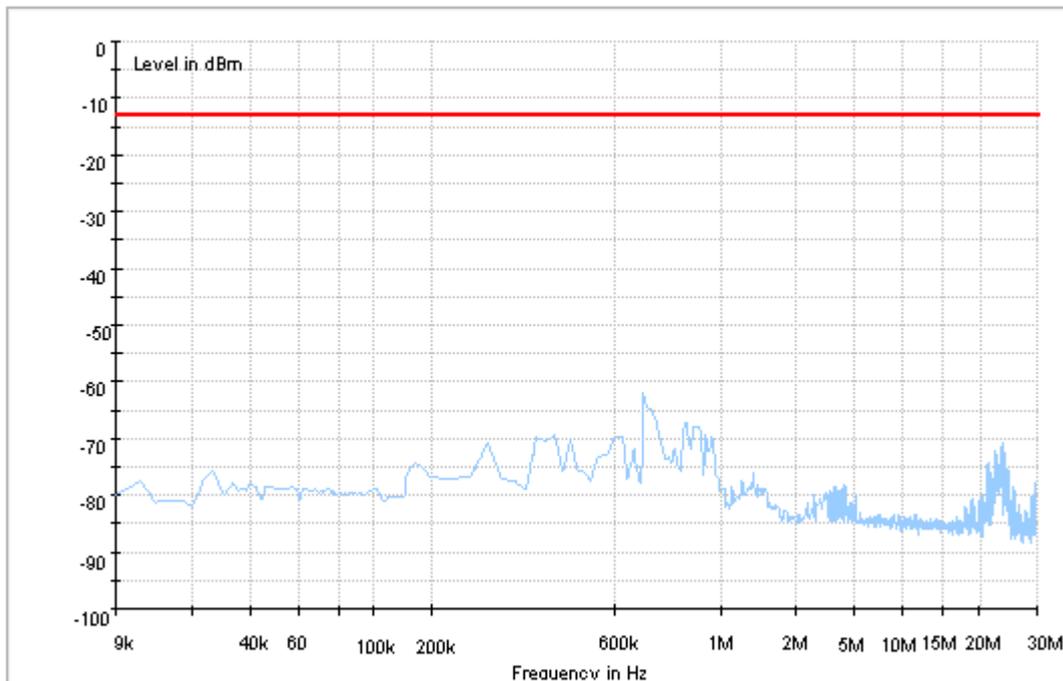


Copy of RSE-TX-DIRECTOR BELOW 1G\_L

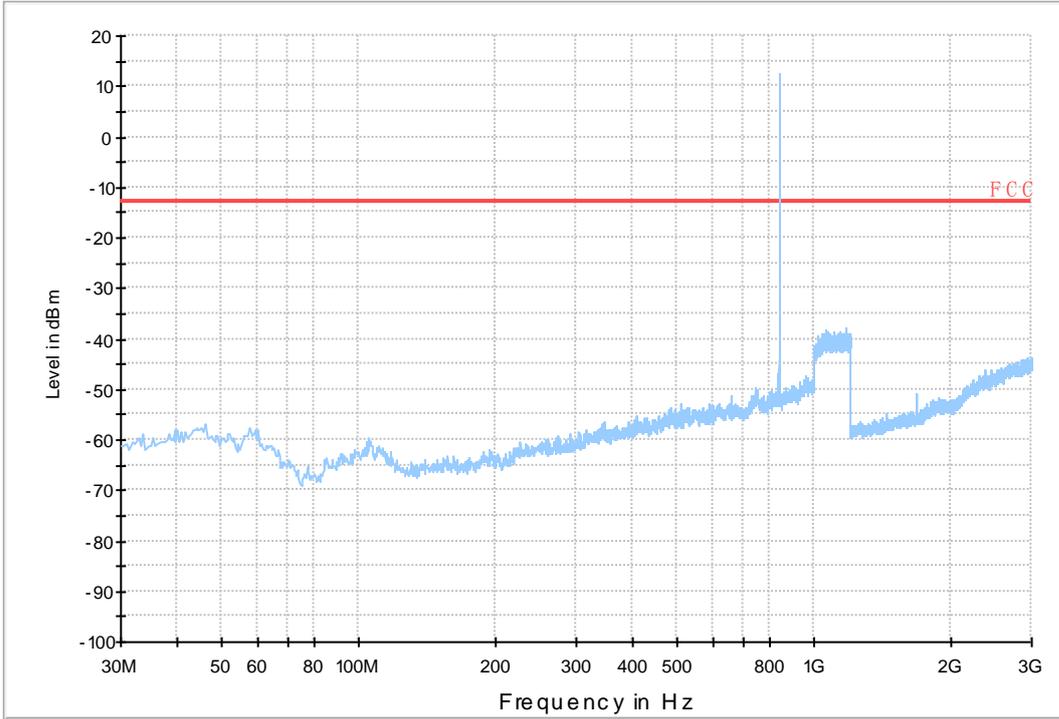


Copy of RSE-TX-DIRECTOR BELOW 1G\_H

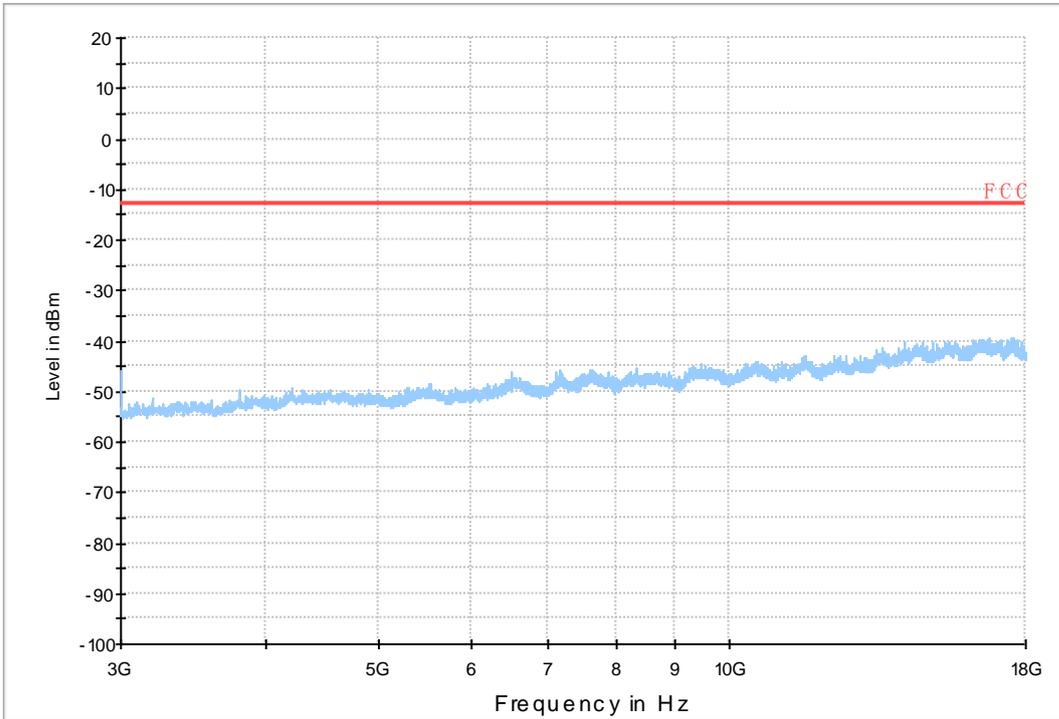


### 7.1.1.2 Test Bandwidth = 10

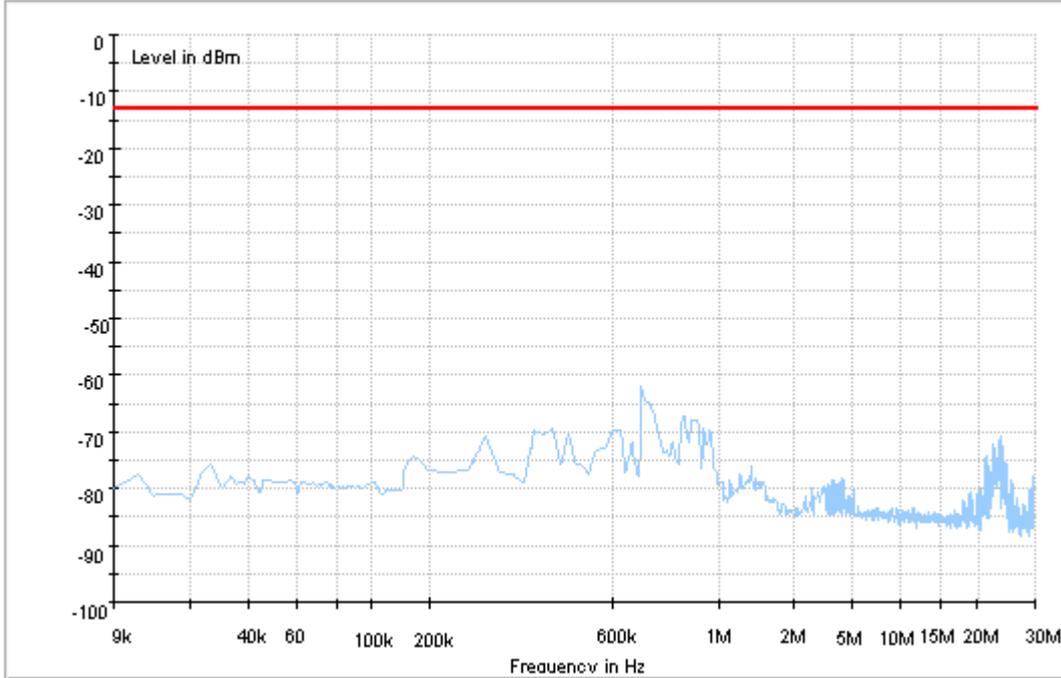

Copy of RSE-TX-DIRECTOR BELOW 1G\_L

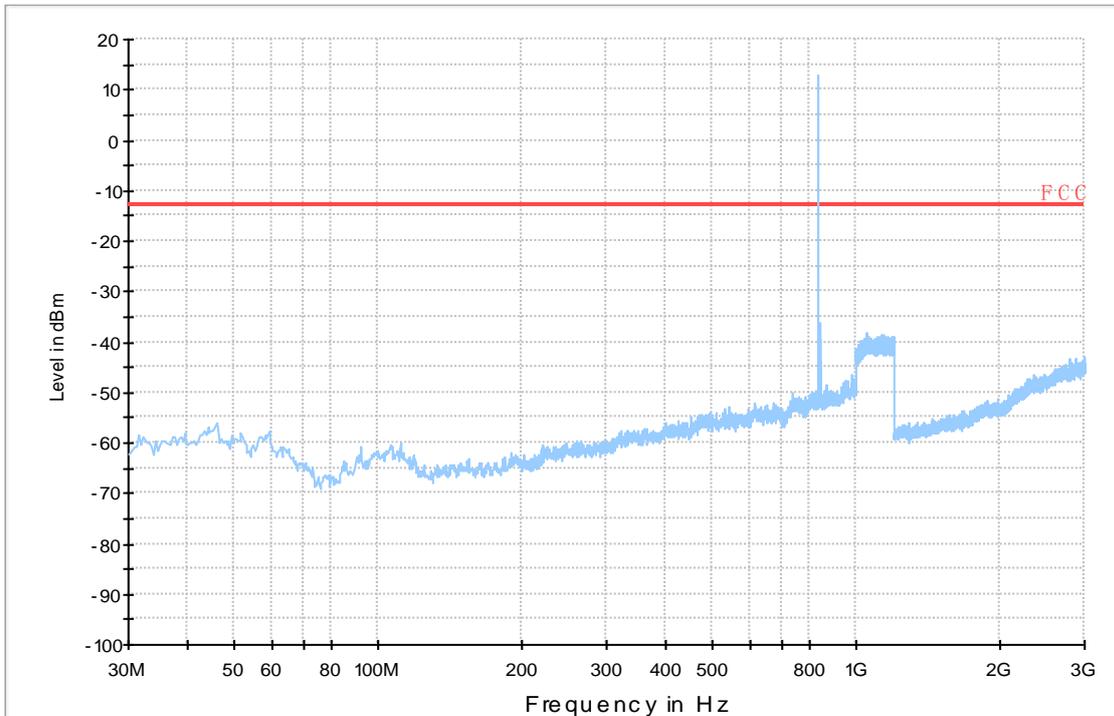

Copy of RSE-TX-DIRECTOR BELOW 1G\_H

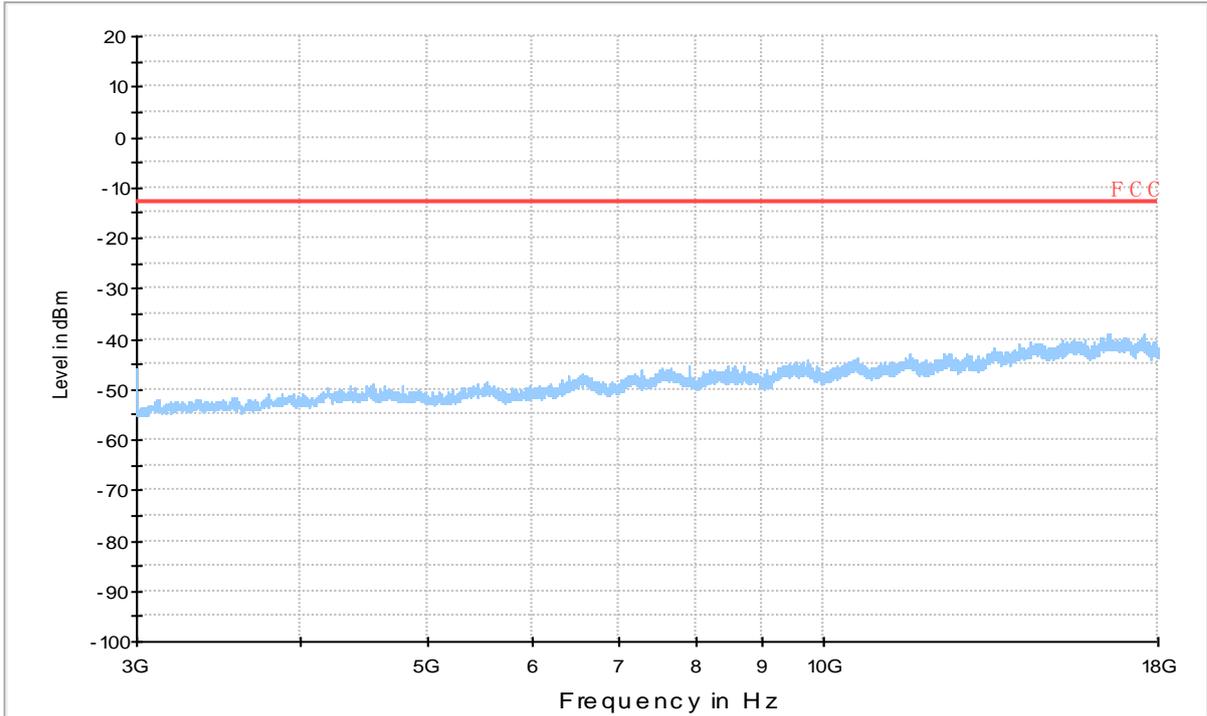



## 8Appendix\_H: Frequency Stability

### Part I - Test Plots

VOID

---

END