



RF TEST REPORT

Applicant Huawei Technologies Co., Ltd.
FCC ID QISKSA-LX9B
Product Smart Phone
Model KSA-LX9X
Report No. R1904H0077-R3
Issue Date May 7, 2019

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2018)/ FCC CFR47 Part 27C (2018)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory	4
1.1	Notes of the Test Report	4
1.2	Test facility	4
1.3	Testing Location	5
2	General Description of Equipment under Test	6
3	Applied Standards	8
4	Test Configuration	9
5	Test Case Results	10
5.1	RF Power Output	10
5.2	Effective Isotropic Radiated Power	13
5.3	Occupied Bandwidth	17
5.4	Band Edge Compliance	23
5.5	Peak-to-Average Power Ratio (PAPR)	31
5.6	Frequency Stability	33
5.7	Spurious Emissions at Antenna Terminals	36
5.8	Radiates Spurious Emission	43
6	Main Test Instruments	47
ANNEX A: Product change description		48

Summary of Measurement Results

No.	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	Refer to the Original
2	Effective Isotropic Radiated power	27.50(h)(2)	Refer to the Original
3	Occupied Bandwidth	2.1049	Refer to the Original
4	Band Edge Compliance	27.53(m)	Refer to the Original
5	Peak-to-Average Power Ratio	27.50(d) /KDB971168 D01(5.7)	Refer to the Original
6	Frequency Stability	2.1055 / 27.54	Refer to the Original
7	Spurious Emissions at Antenna Terminals	2.1051 /27.53(m)	Refer to the Original
8	Radiates Spurious Emission	2.1053 /27.53(m)	Only tested the worst Band of Original
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			
Date of Testing: March 18, 2019~ May 5, 2019			

KSA-LX9X (Report No: R1904H0077-R3) is a variant model of AMN-LX9X (Report No: R1904H0060-R1). Test values partial duplicated from Original for variant. There is only tested Radiates Spurious Emission of LTE Band 7 for variant in this report. The detailed product change description please refers to the ANNEX A.

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

Client Information

Applicant	Huawei Technologies Co., Ltd.
Applicant address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.China.
Manufacturer	Huawei Technologies Co., Ltd.
Manufacturer address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.China.

General information

EUT Description			
Model	KSA-LX9X		
SN	WJSNU19409100701		
Hardware Version	HL1AMNMY		
Software Version	9.0.1.75(C900E31R1P2)		
Power Supply	Battery/AC adapter		
Antenna Type	Internal Antenna		
Antenna Gain	-0.37dBi		
Test Mode(s)	LTE Band 7;		
LTE Category	4		
Maximum E.I.R.P.	LTE Band 7:	19.79dBm	
Rated Power Supply Voltage:	3.82V		
Extreme Voltage	Minimum: 3.6V Maximum: 4.4V		
Extreme Temperature	Lowest: -10°C Highest: +55°C		
Operating Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)
	LTE Band 7	2500 ~ 2570	2620 ~ 2690
EUT Accessory			
Adapter 1	Manufacturer: Huawei Technologies Co., Ltd. (SHENZHEN HUNTKEY ELECTRIC CO., LTD.) Model: HW-050100U01		
Adapter 2	Manufacturer: Huawei Technologies Co., Ltd. (HUIZHOU BYD ELECTRONIC CO., LTD.) Model: HW-050100U01		
Adapter 3	Manufacturer: Huawei Technologies Co., Ltd. (Dongguan Phitek Electronics Co., Ltd.) Model: HW-050100U01		
Battery 1	Manufacturer: HuaweiTechnologies Co., Ltd. (Sunwoda Electronic Co.,LTD) Model: HB405979ECW		

Battery 2	Manufacturer: HuaweiTechnologies Co., Ltd. (SCUD (Fujian) Electronics Co., LTD.) Model: HB405979ECW
Battery 3	Manufacturer: HuaweiTechnologies Co., Ltd. (Desay Battery Electronic Co.,LTD) Model: HB405979ECW
Earphone 1	Manufacturer: Jiangxi Lianchuang Hongsheng Electronic Co. ,LTD. Model: MEND1532B528A02
Earphone 2	Manufacturer: Boluo County Quancheng Electronic Co.,Ltd. Model: 1293-3283-3.5MM-322
Earphone 3	Manufacturer: FOXCONN INTERCONNECT TECHNOLOGY LIMITED Model: EPAB542-2WH05-DH
USB Cable 1	Manufacturer: HONGLIN TECHNOLOGY CO.,LTD. Model: 130-26654
USB Cable 2	Manufacturer: Dongguan Ming Ji Electronics Co.,Ltd. Model: 203-0786-0
USB Cable 3	Manufacturer: Luxshare Precision industry Co., Ltd. Model: L99U2013-CS-H
USB Cable 4	Manufacturer: NingBo Broad Telecommunication Co., Ltd. Model: WA0007
USB Cable 5	Manufacturer: HONGLIN TECHNOLOGY CO., LTD. Model: 130-26669
USB Cable 6	Manufacturer: FOXCONN INTERCONNECT TECHNOLOGY LIMITED Model: CUBB01M-HC304-DH
USB Cable 7	Manufacturer: Luxshare Precision industry Co.,Ltd Model: L99U2017-CS-H
USB Cable 8	Manufacturer: Dongguan Ming Ji Electronics Co.,Ltd Model: 203-1583-0
USB Cable 9	Manufacturer: NingBo Broad Telecommunication Co., Ltd. Model: WA0001
Note: The information of the EUT is declared by the manufacturer. 2. There is more than one SIM / Adapter /USB cable/one Battery/ Earphone, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1/ Adapter 1/ USB cable 2/ Battery 3/ Earphone 3) will be recorded in this report.	

3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC CFR47 Part 2 (2018)

FCC CFR47 Part 27C (2018)

ANSI C63.26 (2015)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4 Test Configuration

There is more than one SIM card slot, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1) will be recorded in this report

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detail in the following table:

Test modes are chosen to be reported as the worst case configuration below for LTE Band 7:

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	O	O	O	O	O	O
Spurious Emissions at Antenna Terminals	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	-	-	O	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.											

5 Test Case Results

5.1 RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

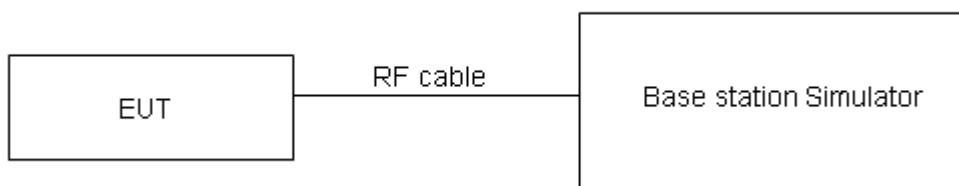

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.4$ dB.

Test Results

LTE Band 7				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20775/2502.5	21100/2535	21425/2567.5
5MHz	QPSK	1	0	21.31	21.25	21.27
		1	13	21.67	21.71	21.70
		1	24	21.30	21.39	21.28
		12	0	20.59	20.57	20.54
		12	6	20.65	20.64	20.61
		12	13	20.65	20.63	20.49
		25	0	20.63	20.63	20.58
	16QAM	1	0	20.74	20.71	20.76
		1	13	20.91	20.77	20.85
		1	24	20.71	20.84	20.68
		12	0	19.61	19.53	19.56
		12	6	19.66	19.58	19.63
		12	13	19.62	19.63	19.50
		25	0	19.59	19.57	19.51
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20800/2505	21100/2535	21400/2565
10MHz	QPSK	1	0	21.33	21.26	21.30
		1	25	21.70	21.76	21.74
		1	49	21.32	21.43	21.31
		25	0	20.63	20.62	20.58
		25	13	20.68	20.69	20.65
		25	25	20.67	20.67	20.54
		50	0	20.71	20.65	20.62
	16QAM	1	0	20.76	20.74	20.78
		1	25	20.94	20.81	20.88
		1	49	20.73	20.86	20.71
		25	0	19.64	19.58	19.60
		25	13	19.68	19.62	19.66
		25	25	19.65	19.68	19.54
		50	0	19.62	19.62	19.55
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20825/2507.5	21100/2535	21375/2562.5
15MHz	QPSK	1	0	21.32	21.22	21.28
		1	38	21.68	21.75	21.71
		1	74	21.29	21.38	21.27
		36	0	20.60	20.58	20.55
		36	18	20.65	20.64	20.61
		36	39	20.62	20.63	20.50
		75	0	20.69	20.61	20.57



	16QAM	1	0	20.71	20.72	20.76
		1	38	20.92	20.78	20.86
		1	74	20.70	20.82	20.68
		36	0	19.61	19.56	19.57
		36	18	19.65	19.57	19.62
		36	39	19.63	19.64	19.51
		75	0	19.59	19.57	19.51
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20850/2510	21100/2535	21350/2560
20MHz	QPSK	1	0	21.29	21.18	21.25
		1	50	21.67	21.71	21.69
		1	99	21.27	21.37	21.24
		50	0	20.57	20.53	20.51
		50	25	20.63	20.60	20.58
		50	50	20.61	20.59	20.46
		100	0	20.66	20.56	20.53
	16QAM	1	0	20.69	20.68	20.71
		1	50	20.88	20.76	20.82
		1	99	20.69	20.79	20.66
		50	0	19.58	19.52	19.54
		50	25	19.62	19.55	19.59
		50	50	19.60	19.59	19.47
		100	0	19.57	19.53	19.48

5.2 Effective Isotropic Radiated Power

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26 (2015).
 - a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
 - b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
 - c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
 - d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
 - e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
 - f) The maximum ERP is the maximum value determined in the preceding step.
 - g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$
 where: dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test setup

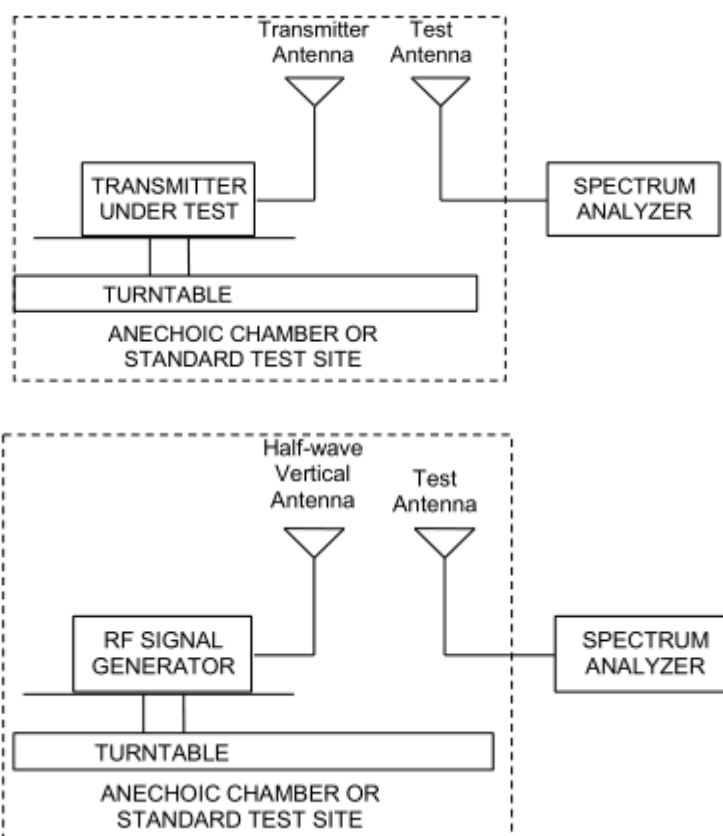

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Limits

Rule Part 27.50(h) (2) specifies that “Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.”

Part 27.50(h)(2) Limit-LTE 7	$\leq 2\text{ W}$ (33 dBm)
------------------------------	----------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19\text{ dB}$

Test Results

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

LTE Band 7						
Band width	Channel	Frequency (MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
5 MHz (QPSK)	Low	2502.5	Horizontal	18.67	33	Pass
	Mid	2535	Horizontal	18.39	33	Pass
	High	2567.5	Horizontal	19.37	33	Pass
10 MHz (QPSK)	Low	2505	Horizontal	18.71	33	Pass
	Mid	2535	Horizontal	18.58	33	Pass
	High	2565	Horizontal	19.46	33	Pass
15 MHz (QPSK)	Low	2507.5	Horizontal	18.86	33	Pass
	Mid	2535	Horizontal	18.69	33	Pass
	High	2562.5	Horizontal	19.59	33	Pass
20 MHz (QPSK)	Low	2510	Horizontal	18.92	33	Pass
	Mid	2535	Horizontal	18.79	33	Pass
	High	2560	Horizontal	19.79	33	Pass
5 MHz (16QAM)	Low	2502.5	Horizontal	18.23	33	Pass
	Mid	2535	Horizontal	17.99	33	Pass
	High	2567.5	Horizontal	18.89	33	Pass
10 MHz (16QAM)	Low	2505	Horizontal	18.34	33	Pass
	Mid	2535	Horizontal	18.09	33	Pass
	High	2565	Horizontal	18.98	33	Pass
15 MHz (16QAM)	Low	2507.5	Horizontal	18.46	33	Pass
	Mid	2535	Horizontal	18.18	33	Pass
	High	2562.5	Horizontal	19.14	33	Pass
20 MHz (16QAM)	Low	2510	Horizontal	18.57	33	Pass
	Mid	2535	Horizontal	18.41	33	Pass
	High	2560	Horizontal	19.33	33	Pass

5.3 Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band7 (5MHz).

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 7 (10MHz/15MHz/20MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

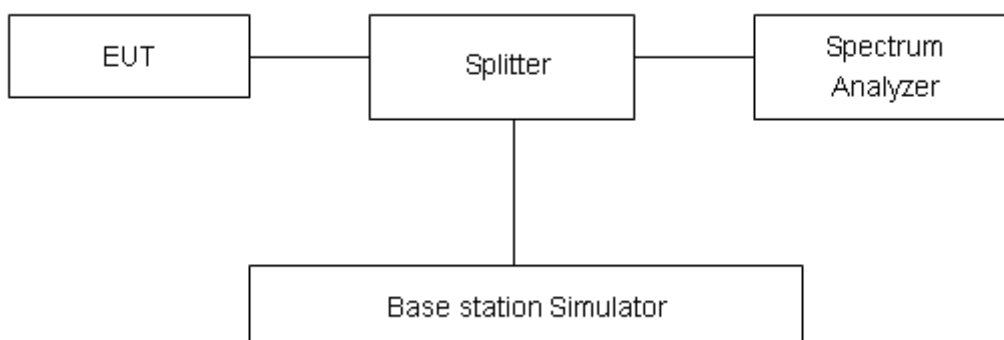

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=624\text{Hz}$.

Test Result


LTE Band 7						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	5	20775	2502.5	4.5199	5.155
			21100	2535	4.5032	4.921
			21425	2567.5	4.4930	4.939
		10	20800	2505	9.0527	10.830
			21100	2535	9.0258	9.932
			21400	2565	9.0711	10.250
		15	20825	2507.5	13.4890	15.310
			21100	2535	13.4540	14.590
			21375	2562.5	13.5200	15.000
		20	20850	2510	17.9380	19.170
			21100	2535	17.9130	19.190
			21350	2560	17.9570	19.240
	16QAM	5	20775	2502.5	4.4949	4.893
			21100	2535	4.5254	4.951
			21425	2567.5	4.5090	4.948
		10	20800	2505	9.0271	9.901
			21100	2535	9.0151	9.905
			21400	2565	9.0430	9.862
		15	20825	2507.5	13.4760	14.610
			21100	2535	13.4550	14.610
			21375	2562.5	13.5210	14.880
		20	20850	2510	17.9350	19.370
			21100	2535	17.9040	19.190
			21350	2560	17.9270	19.270




LTE Band 7 QPSK 5MHz CH-Low




LTE Band 7 QPSK 10MHz CH-Low

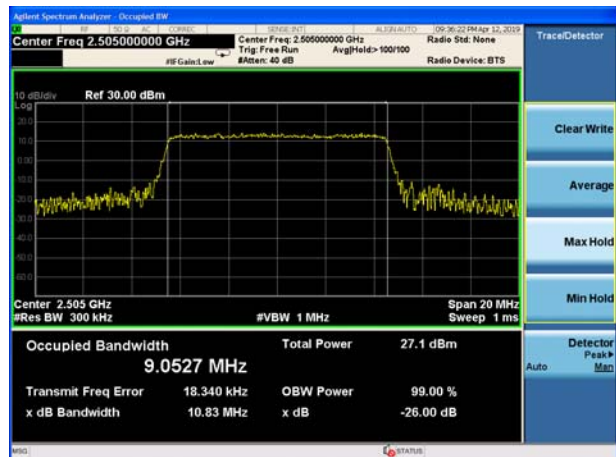

LTE Band 7 QPSK 5MHz CH-Middle

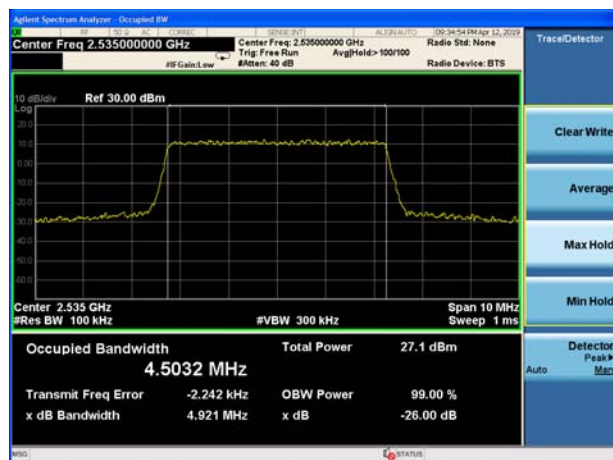


LTE Band 7 QPSK 10MHz CH-Middle

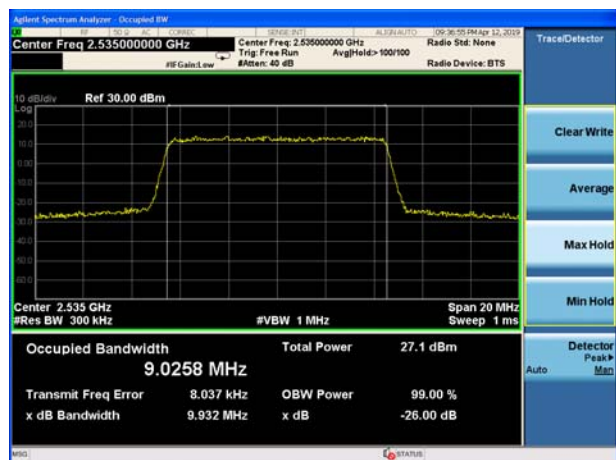

LTE Band 7 QPSK 5MHz CH-High




LTE Band 7 QPSK 10MHz CH-High

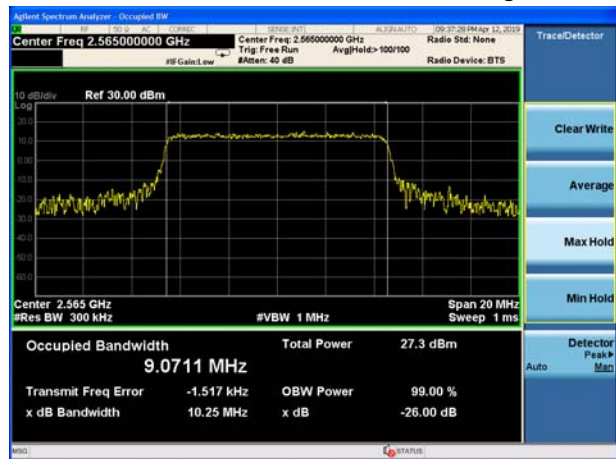





LTE Band 7 QPSK 15MHz CH-Low

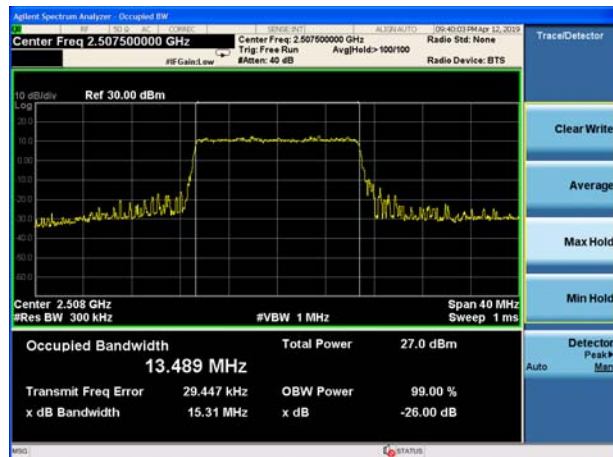


LTE Band 7 QPSK 20MHz CH-Low

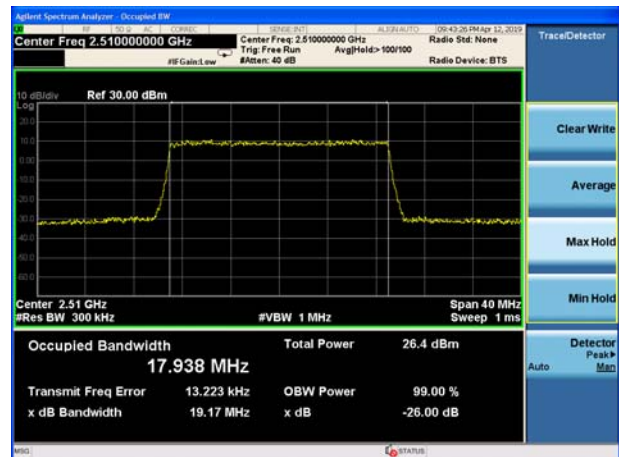


LTE Band 7 QPSK 15MHz CH-Middle

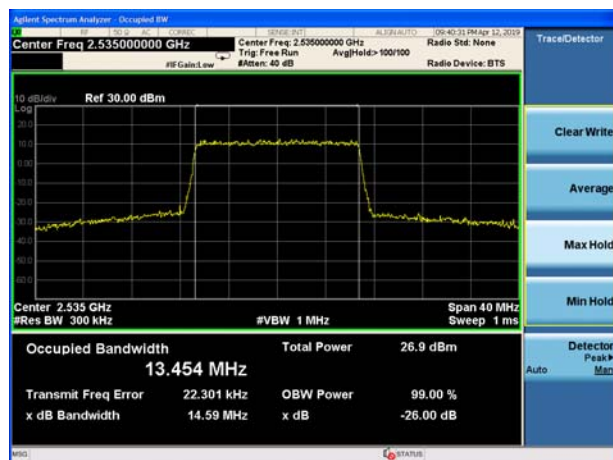


LTE Band 7 QPSK 20MHz CH-Middle

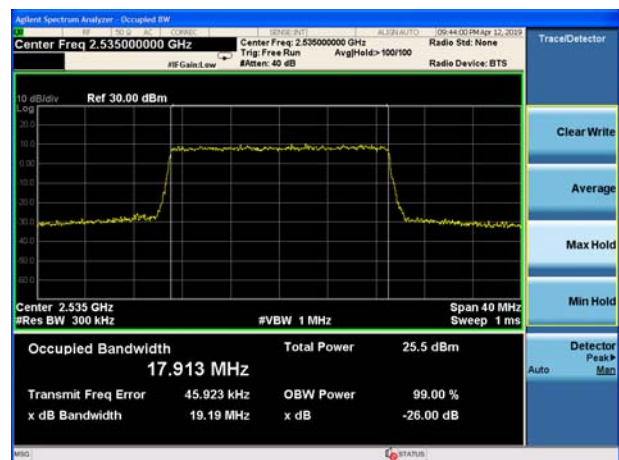

LTE Band 7 QPSK 15MHz CH-High

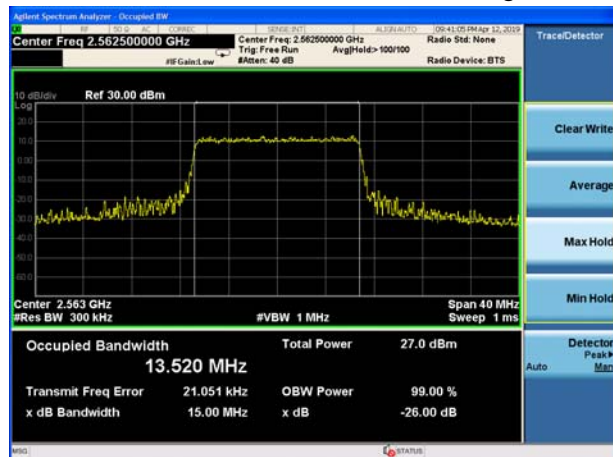


LTE Band 7 QPSK 20MHz CH-High

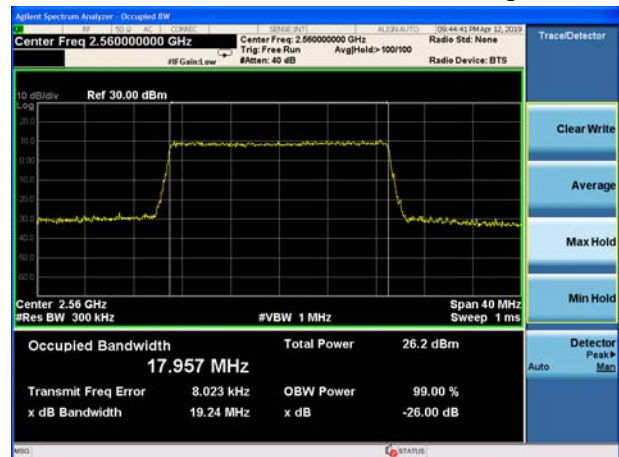





LTE Band 7 16QAM 5MHz CH-Low

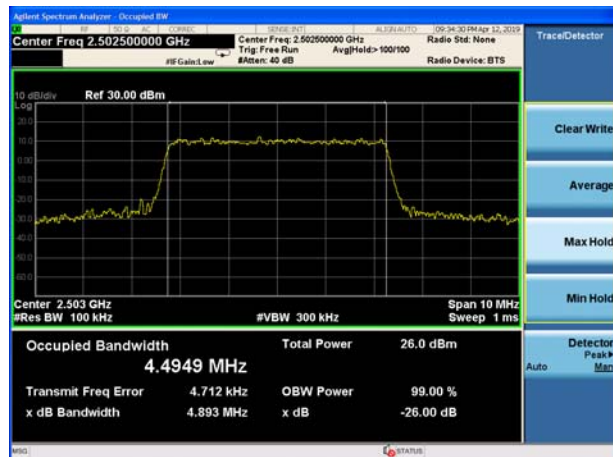


LTE Band 7 16QAM 10MHz CH-Low

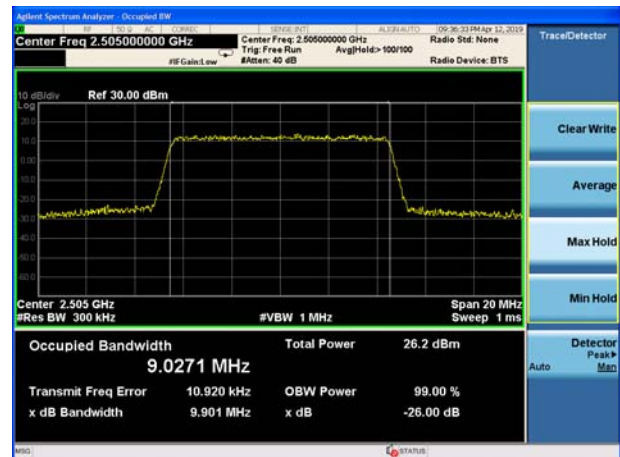

LTE Band 7 16QAM 5MHz CH-Middle

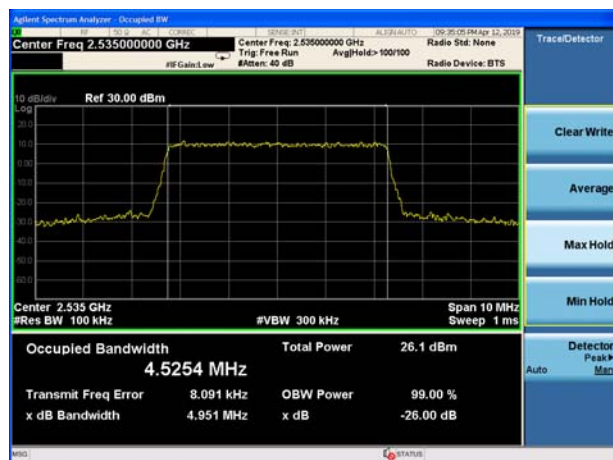

LTE Band 7 16QAM 10MHz CH-Middle

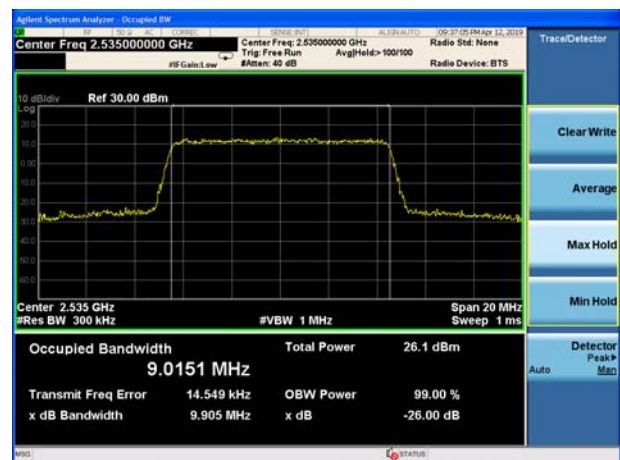

LTE Band 7 16QAM 5MHz CH-High




LTE Band 7 16QAM 10MHz CH-High







LTE Band 7 16QAM 15MHz CH-Low

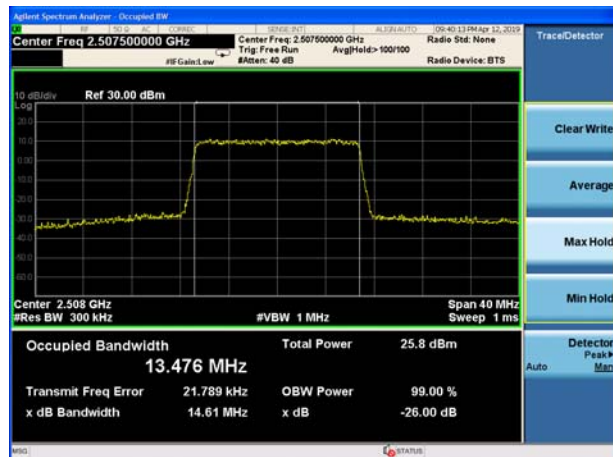


LTE Band 7 16QAM 20MHz CH-Low

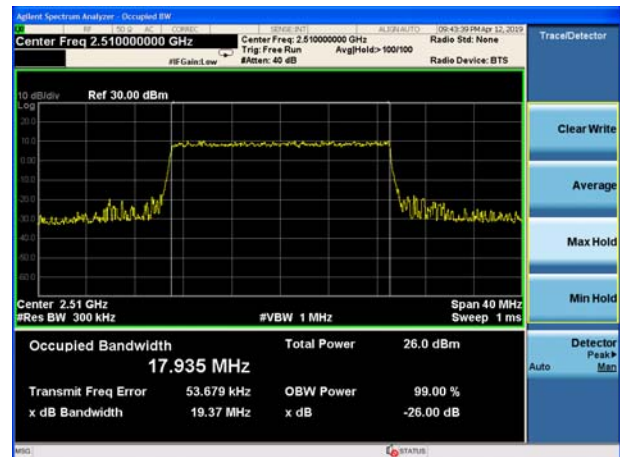


LTE Band 7 16QAM 15MHz CH-Middle

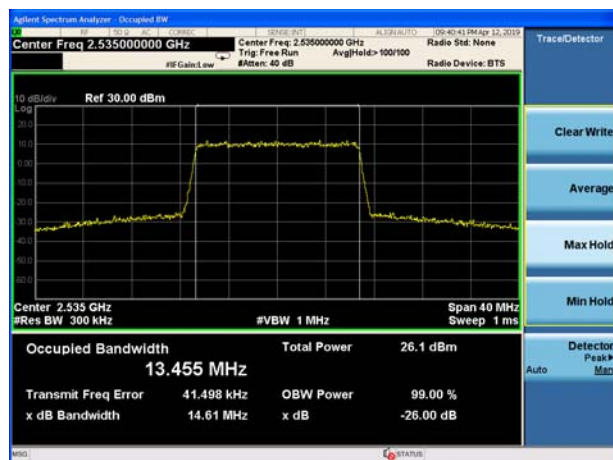


LTE Band 7 16QAM 20MHz CH-Middle

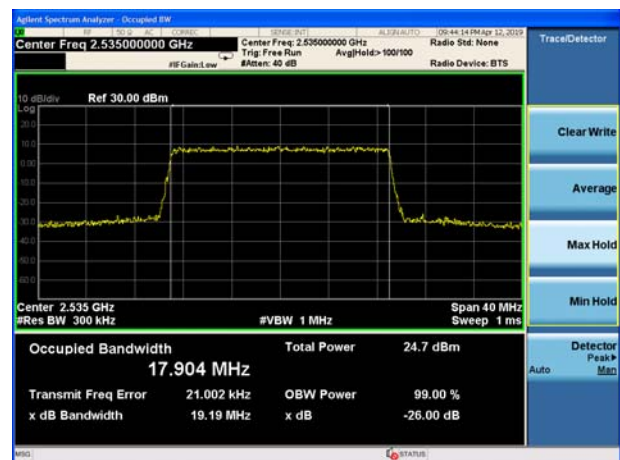

LTE Band 7 16QAM 15MHz CH-High

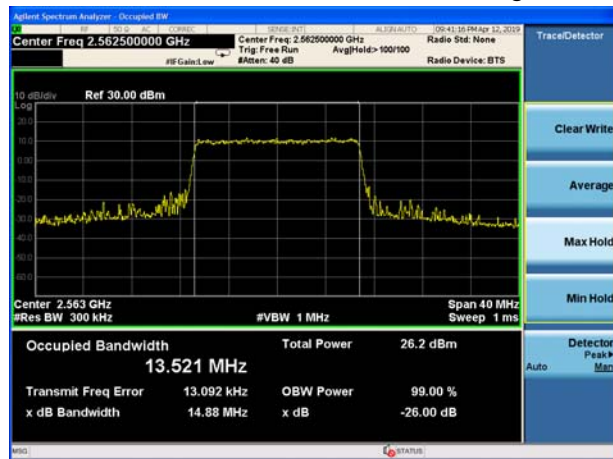

LTE Band 7 16QAM 20MHz CH-High

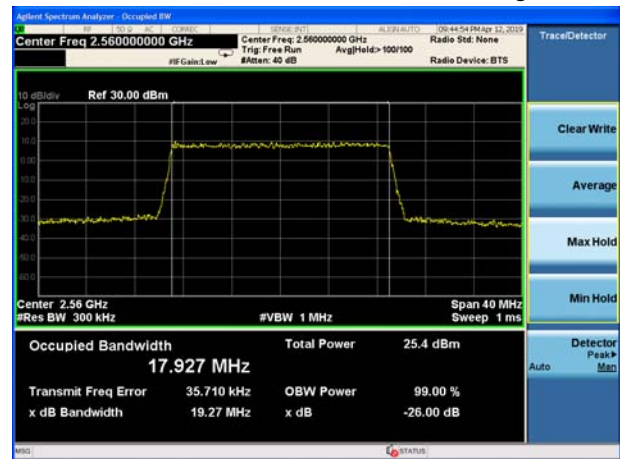

5.4 Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 D01 v03r01 Section 6.0

1.The EUT was connected to spectrum analyzer and system simulator via a power divider.

2. The band edges of low and high channels for the highest RF powers were measured.

RBW is set to 50 kHz, VBW is set to 200 kHz for LTE Band 7 (5MHz).

RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band 7 (10MHz).

RBW is set to 200 kHz, VBW is set to 1MHz for LTE Band 7 (15MHz/20MHz).


on spectrum analyzer.

4. Set spectrum analyzer with RMS detector.

5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

6. Checked that all the results comply with the emission limit line.

Test Setup

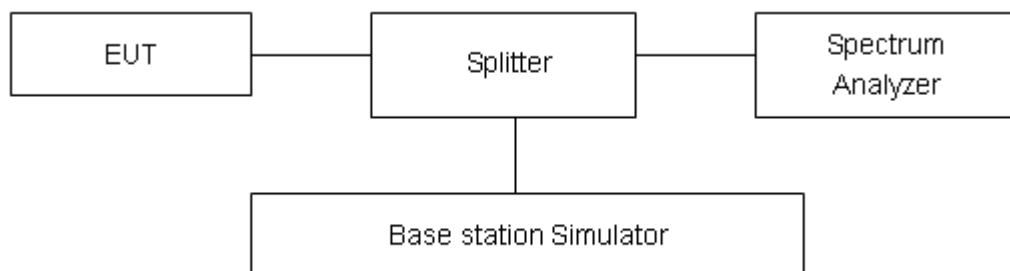

Limits

Rule Part 27.53(m) (4)/ specifies that “for BRS and EBS stations. For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and



55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Example:

The limit line is derived from 43 + 10log (P) dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log (P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684\text{dB}$.


Test Result

All the test traces in the plots shows the test results clearly.


LTE Band 7 QPSK 5MHz CH-Low, 1 RB

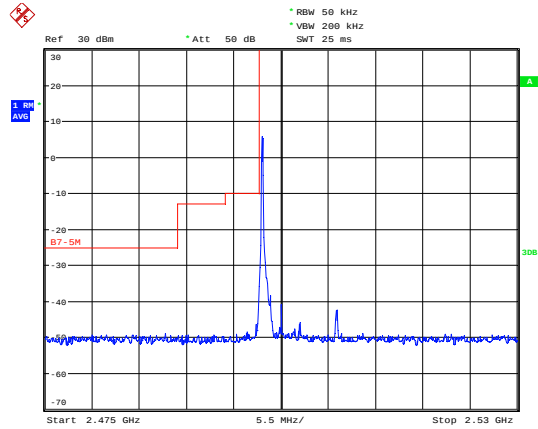


LTE Band 7 QPSK 5MHz CH-High, 1 RB

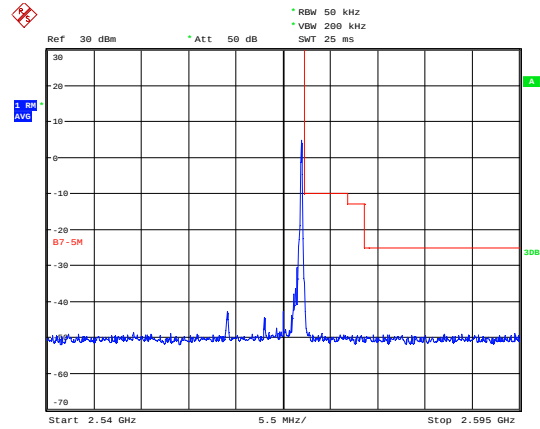


LTE Band 7 QPSK 5MHz CH-Low, 100%RB

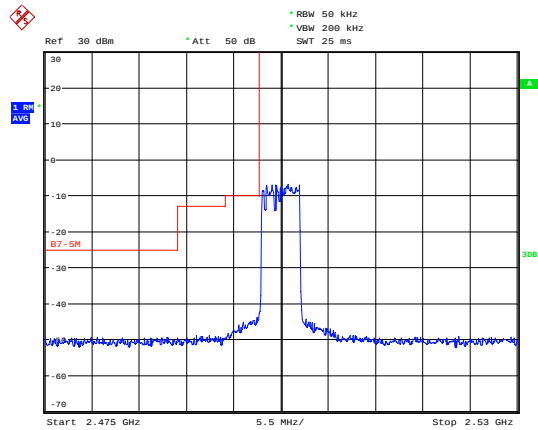


LTE Band 7 QPSK 5MHz CH-High, 100%RB

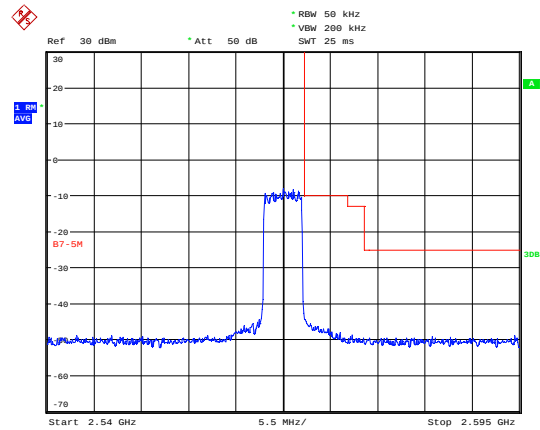

LTE Band 7 QPSK 10MHz CH-Low, 1 RB

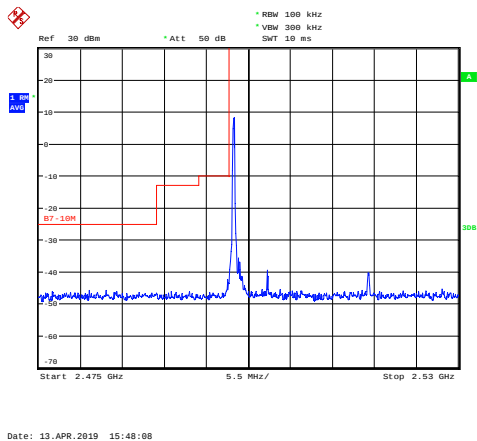


LTE Band 7 QPSK 10MHz CH-High, 1 RB

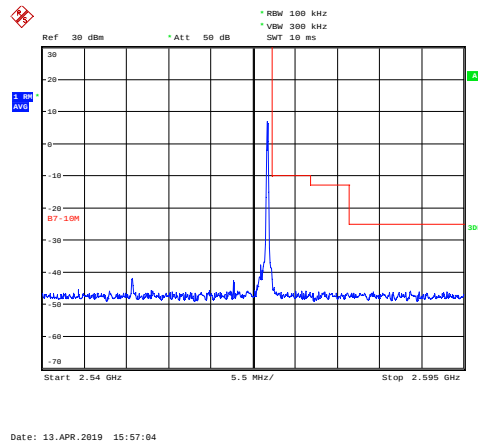




LTE Band 7 QPSK 10MHz CH-Low, 100%RB

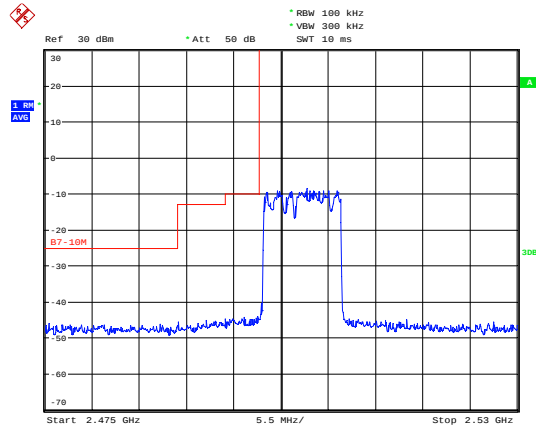


Date: 13.APR.2019 15:58:27

LTE Band 7 QPSK 10MHz CH-High, 100%RB

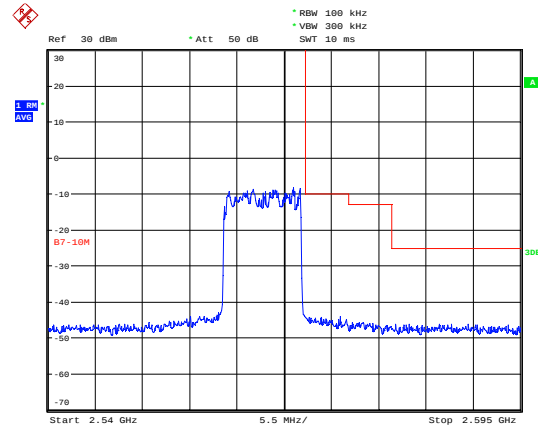


Date: 13.APR.2019 15:57:18

LTE Band 7 QPSK 15MHz CH-Low, 1 RB

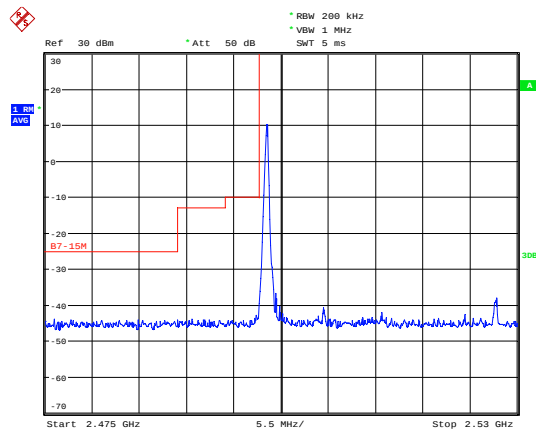


Date: 13.APR.2019 15:51:43

LTE Band 7 QPSK 15MHz CH-High, 1 RB

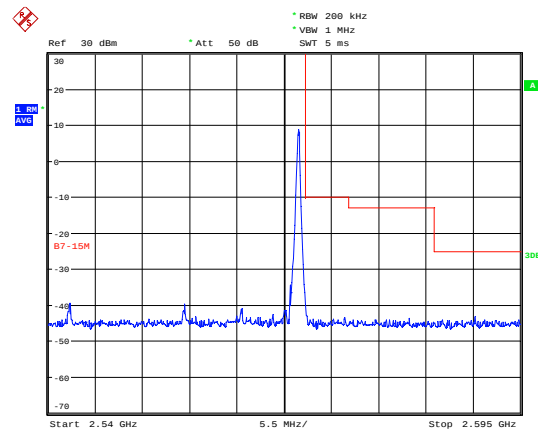


Date: 13.APR.2019 15:58:09

LTE Band 7 QPSK 15MHz CH-Low, 100%RB

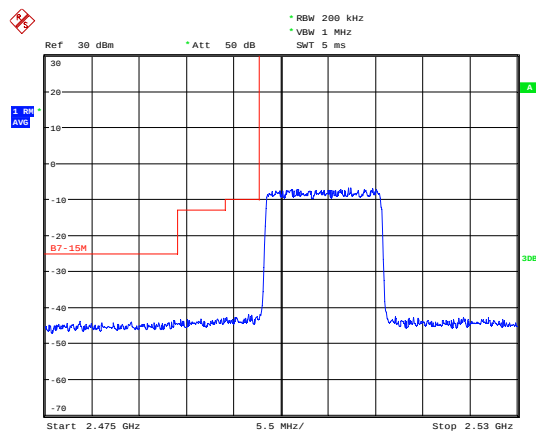

Date: 13.APR.2019 15:52:01


LTE Band 7 QPSK 15MHz CH-High, 100%RB

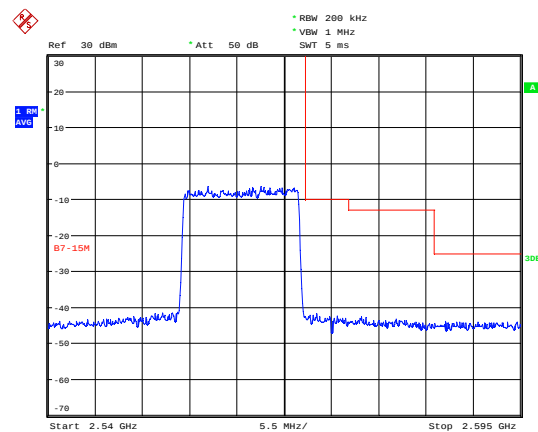

Date: 13.APR.2019 15:58:31




LTE Band 7 QPSK 20MHz CH-Low, 1 RB

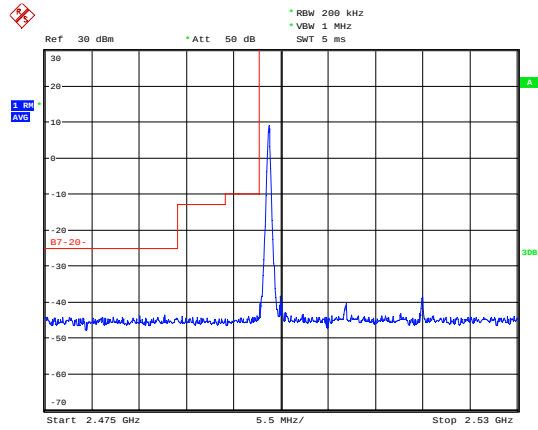


Date: 13.APR.2019 15:52:52

LTE Band 7 QPSK 20MHz CH-High, 1 RB

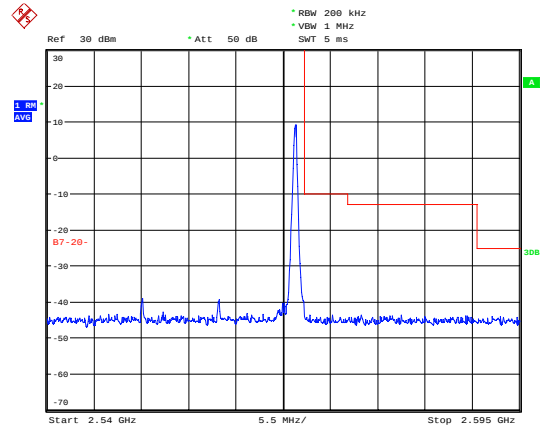


Date: 13.APR.2019 15:53:55

LTE Band 7 QPSK 20MHz CH-Low, 100%RB

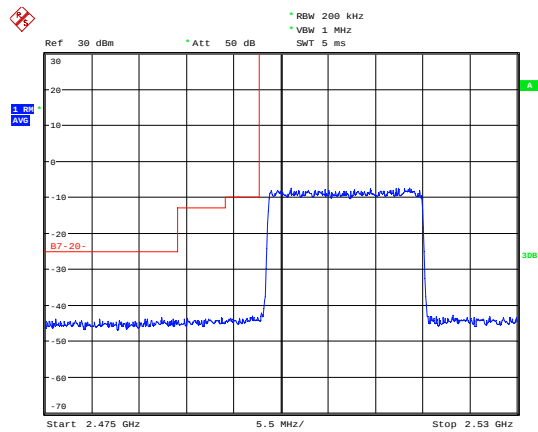


Date: 13.APR.2019 15:53:07

LTE Band 7 QPSK 20MHz CH-High, 100%RB

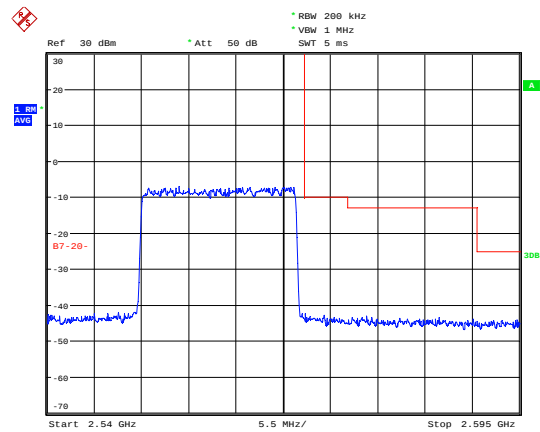


Date: 13.APR.2019 15:54:16

LTE Band 7 16QAM 5MHz CH-Low, 1 RB

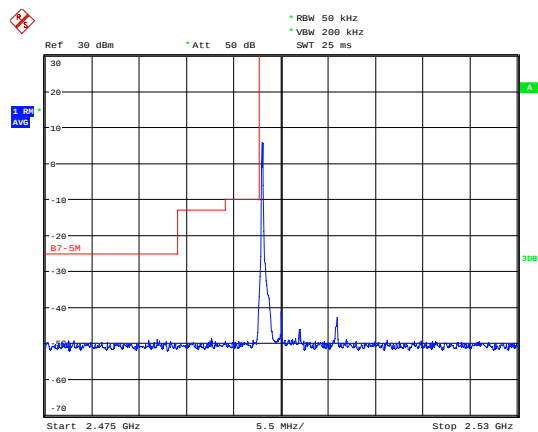

Date: 13.APR.2019 15:46:42


LTE Band 7 16QAM 5MHz CH-High, 1 RB

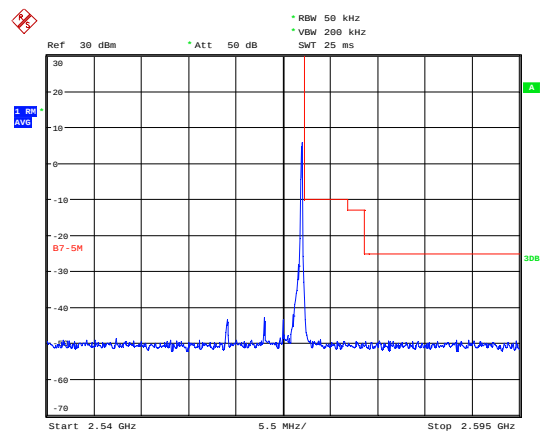

Date: 13.APR.2019 15:55:28




LTE Band 7 16QAM 5MHz CH-Low, 100%RB

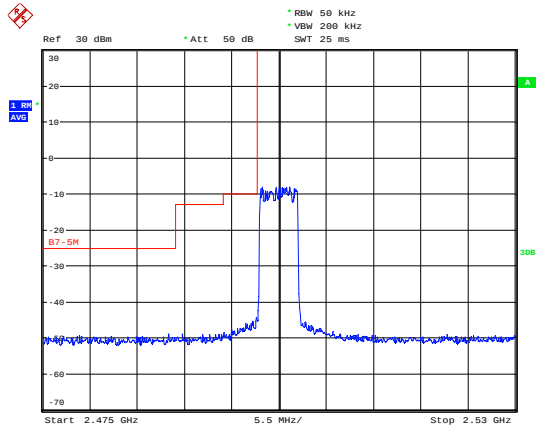


Date: 13.APR.2019 15:47:08

LTE Band 7 16QAM 5MHz CH-High, 100%RB

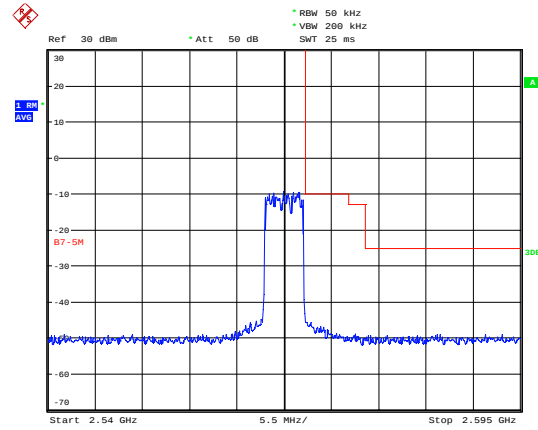


Date: 13.APR.2019 15:55:48

LTE Band 7 16QAM 10MHz CH-Low, 1 RB

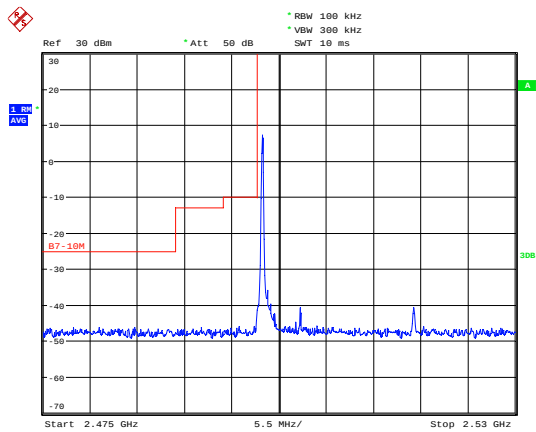


Date: 13.APR.2019 15:58:13

LTE Band 7 16QAM 10MHz CH-High, 1 RB

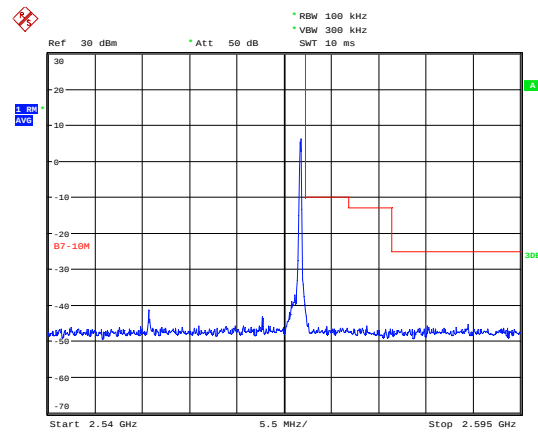


Date: 13.APR.2019 15:57:10

LTE Band 7 16QAM 10MHz CH-Low, 100%RB

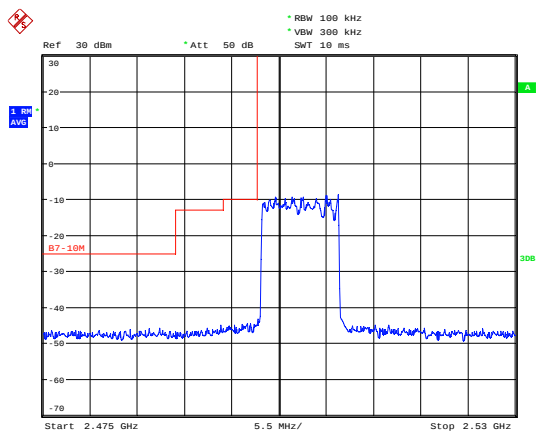

Date: 13.APR.2019 15:58:35


LTE Band 7 16QAM 10MHz CH-High, 100%RB

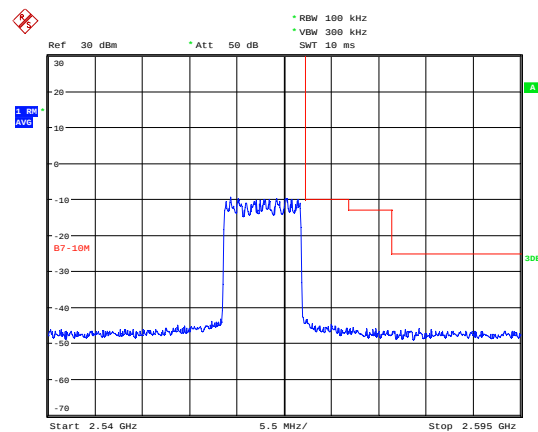

Date: 13.APR.2019 15:57:25




LTE Band 7 16QAM 15MHz CH-Low, 1 RB

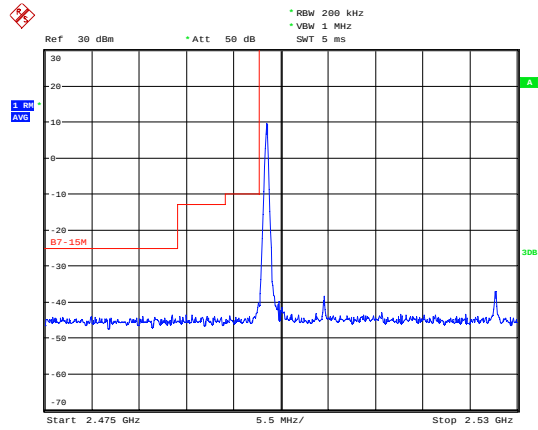


Date: 13.APR.2019 15:51:51

LTE Band 7 16QAM 15MHz CH-High, 1 RB

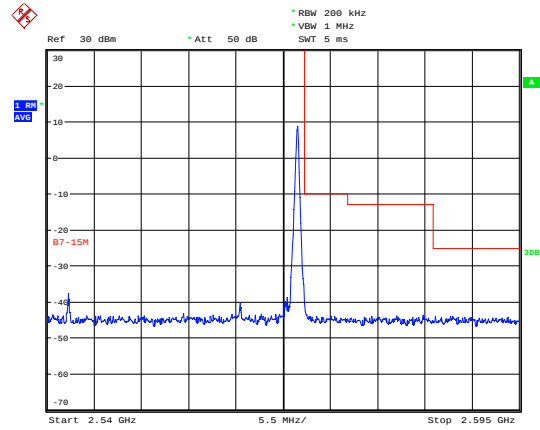


Date: 13.APR.2019 15:58:15

LTE Band 7 16QAM 15MHz CH-Low, 100%RB

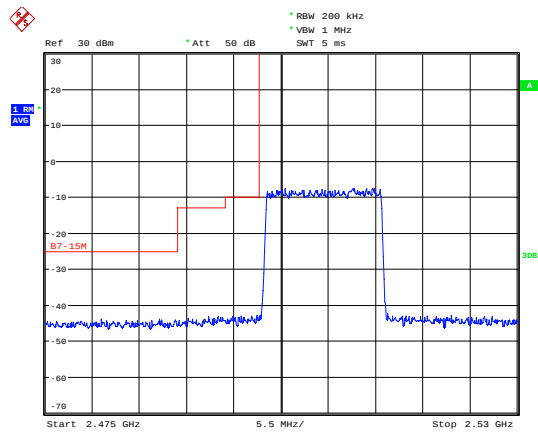


Date: 13.APR.2019 15:52:08

LTE Band 7 16QAM 15MHz CH-High, 100%RB

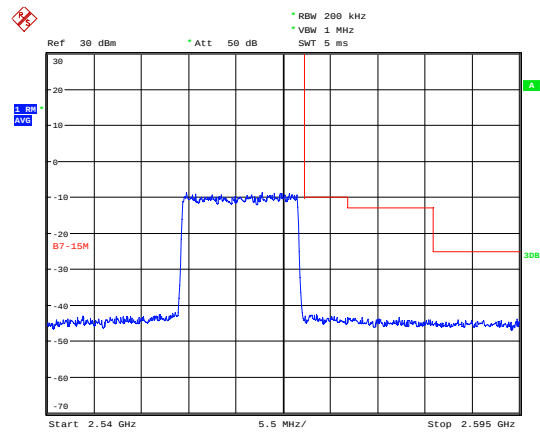


Date: 13.APR.2019 15:58:39

LTE Band 7 16QAM 20MHz CH-Low, 1 RB

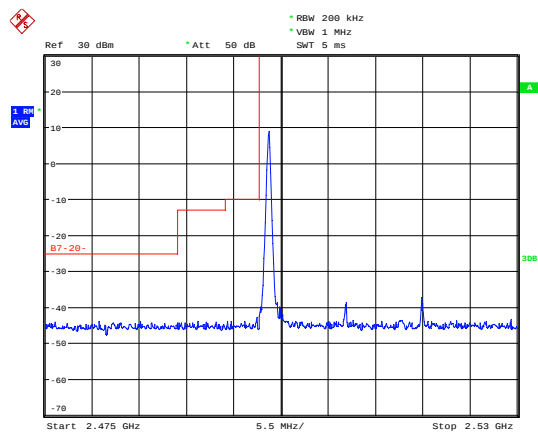

Date: 13.APR.2019 15:52:59


LTE Band 7 16QAM 20MHz CH-High, 1 RB

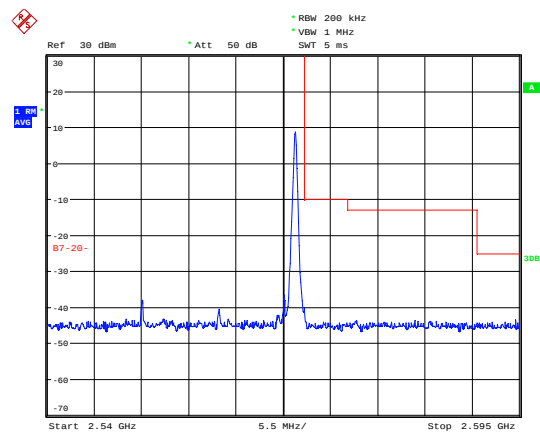

Date: 13.APR.2019 15:54:04




LTE Band 7 16QAM 20MHz CH-Low, 100%RB

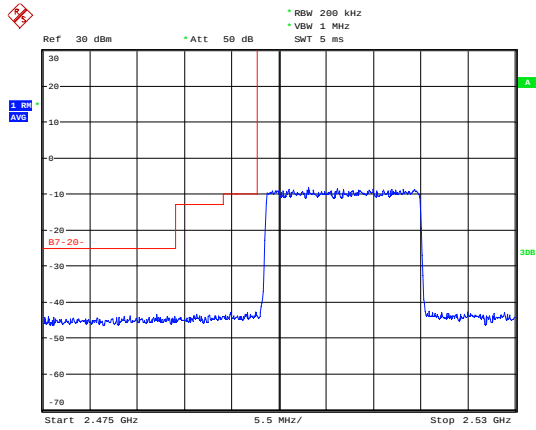

Date: 13.APR.2019 15:53:14

LTE Band 7 16QAM 20MHz CH-High, 100%RB

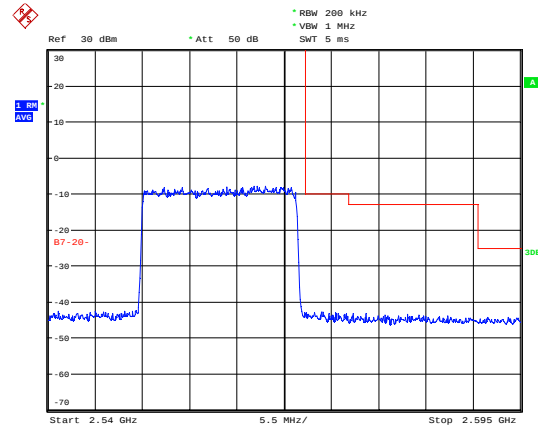

Date: 13.APR.2019 15:54:23

5.5 Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

Test Setup

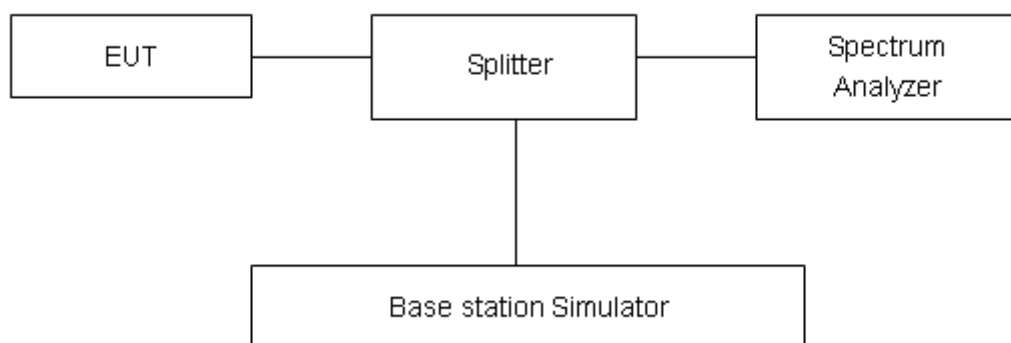

Limits

Rule Part 27.50(d)(5) Equipment employed must be authorized in accordance with the provisions of 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

LTE Band 7								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	5	20775	2502.5	23.16	17.70	5.46	≤13	PASS
		21100	2535	23.82	18.35	5.47	≤13	PASS
		21425	2567.5	23.12	17.65	5.47	≤13	PASS
	10	20800	2505	23.17	17.60	5.57	≤13	PASS
		21100	2535	23.22	17.76	5.46	≤13	PASS
		21400	2565	23.31	17.75	5.56	≤13	PASS
	15	20825	2507.5	25.45	19.59	5.86	≤13	PASS
		21100	2535	24.98	19.24	5.74	≤13	PASS
		21375	2562.5	25.17	19.30	5.87	≤13	PASS
	20	20850	2510	25.31	19.58	5.73	≤13	PASS
		21100	2535	24.98	19.43	5.55	≤13	PASS
		21350	2560	24.30	18.57	5.73	≤13	PASS
16QAM	5	20775	2502.5	22.85	16.78	6.07	≤13	PASS
		21100	2535	22.84	16.46	6.38	≤13	PASS
		21425	2567.5	22.29	16.19	6.10	≤13	PASS
	10	20800	2505	22.93	16.73	6.20	≤13	PASS
		21100	2535	22.58	16.38	6.20	≤13	PASS
		21400	2565	23.06	16.85	6.21	≤13	PASS
	15	20825	2507.5	24.53	18.15	6.38	≤13	PASS
		21100	2535	24.46	18.22	6.24	≤13	PASS
		21375	2562.5	24.55	18.27	6.28	≤13	PASS
	20	20850	2510	25.03	18.60	6.43	≤13	PASS
		21100	2535	24.38	18.12	6.26	≤13	PASS
		21350	2560	23.34	16.96	6.38	≤13	PASS

5.6 Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size.

(1) With all power removed, the temperature was decreased to -10°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.4 V, with a nominal voltage of 3.82V.

Test setup

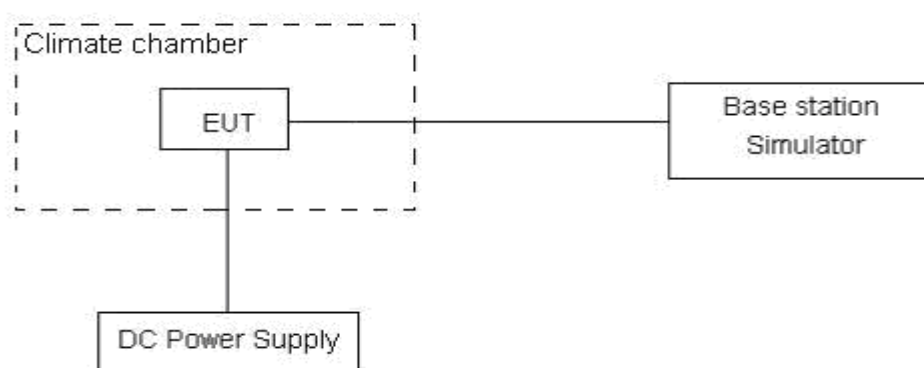

Limits

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3, U = 0.01\text{ppm}$.

Test Result

LTE Band 7						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	9.05	11.23	0.00481	0.00598	PASS
Extreme (55℃)		11.75	5.09	0.00625	0.00270	PASS
Extreme (50℃)		3.70	2.43	0.00197	0.00129	PASS
Extreme (40℃)		12.81	11.99	0.00681	0.00638	PASS
Extreme (30℃)		17.62	7.36	0.00937	0.00391	PASS
Extreme (20℃)		13.61	12.91	0.00724	0.00687	PASS
Extreme (10℃)		13.76	3.20	0.00732	0.00170	PASS
Extreme (0℃)		11.95	5.72	0.00636	0.00304	PASS
Extreme (-10℃)		2.60	17.17	0.00138	0.00913	PASS
Extreme (-20℃)		3.27	13.62	0.00174	0.00725	PASS
Extreme (-30℃)		17.59	11.72	0.00935	0.00623	PASS
25℃	LV	6.00	4.17	0.00319	0.00222	PASS
	HV	15.89	14.73	0.00845	0.00784	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	9.34	14.62	0.00497	0.00777	PASS
Extreme (55℃)		16.20	17.63	0.00861	0.00938	PASS
Extreme (50℃)		2.20	6.23	0.00117	0.00331	PASS
Extreme (40℃)		4.95	17.11	0.00263	0.00910	PASS
Extreme (30℃)		7.40	2.15	0.00393	0.00114	PASS
Extreme (20℃)		17.12	12.88	0.00911	0.00685	PASS
Extreme (10℃)		2.95	11.89	0.00157	0.00633	PASS
Extreme (0℃)		1.13	1.21	0.00060	0.00064	PASS
Extreme (-10℃)		4.54	13.26	0.00241	0.00705	PASS
Extreme (-20℃)		5.55	13.46	0.00295	0.00716	PASS
Extreme (-30℃)		6.80	11.79	0.00362	0.00627	PASS
25℃	LV	15.67	1.51	0.00833	0.00080	PASS
	HV	16.62	13.84	0.00884	0.00736	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	15MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	15.94	3.40	0.00848	0.00181	PASS
Extreme (55℃)		14.38	7.69	0.00765	0.00409	PASS



Extreme (50℃)		16.86	1.20	0.00897	0.00064	PASS
Extreme (40℃)		3.55	4.35	0.00189	0.00232	PASS
Extreme (30℃)		14.13	10.52	0.00752	0.00559	PASS
Extreme (20℃)		7.88	14.41	0.00419	0.00766	PASS
Extreme (10℃)		10.37	8.85	0.00552	0.00471	PASS
Extreme (0℃)		4.19	10.78	0.00223	0.00573	PASS
Extreme (-10℃)		12.31	14.80	0.00655	0.00787	PASS
Extreme (-20℃)		14.23	9.35	0.00757	0.00497	PASS
Extreme (-30℃)		1.65	6.98	0.00088	0.00371	PASS
25℃	LV	2.65	8.24	0.00141	0.00438	PASS
	HV	17.74	3.70	0.00944	0.00197	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	20MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	16.06	6.41	0.00854	0.00341	PASS
Extreme (55℃)		3.71	10.27	0.00197	0.00546	PASS
Extreme (50℃)		6.91	4.59	0.00368	0.00244	PASS
Extreme (40℃)		1.17	2.64	0.00062	0.00140	PASS
Extreme (30℃)		7.88	1.98	0.00419	0.00105	PASS
Extreme (20℃)		11.71	16.75	0.00623	0.00891	PASS
Extreme (10℃)		1.48	15.88	0.00079	0.00844	PASS
Extreme (0℃)		12.38	5.88	0.00659	0.00313	PASS
Extreme (-10℃)		1.93	15.74	0.00103	0.00837	PASS
Extreme (-20℃)		10.29	1.48	0.00547	0.00079	PASS
Extreme (-30℃)		4.93	5.72	0.00262	0.00304	PASS
25℃	LV	17.86	11.92	0.00950	0.00634	PASS
	HV	1.11	4.61	0.00059	0.00245	PASS

5.7 Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.


RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

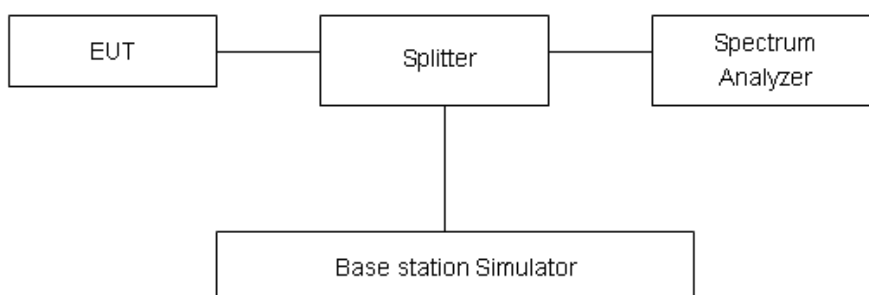

Limits

Rule Part 27.53(m) $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

Part 27.53(m) Limit	-25 dBm
---------------------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-26GHz	1.407 dB




Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.


The signal beyond the limit is carrier.

LTE Band 7 5MHz CH-Low 30MHz~1GHz

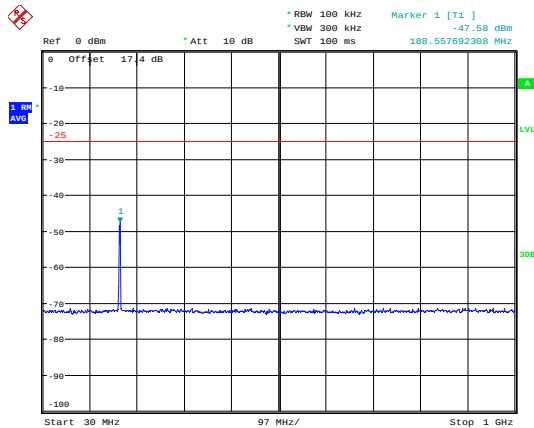


Date: 15.APR.2019 12:55:05

LTE Band 7 5MHz CH-Middle 30MHz~1GHz

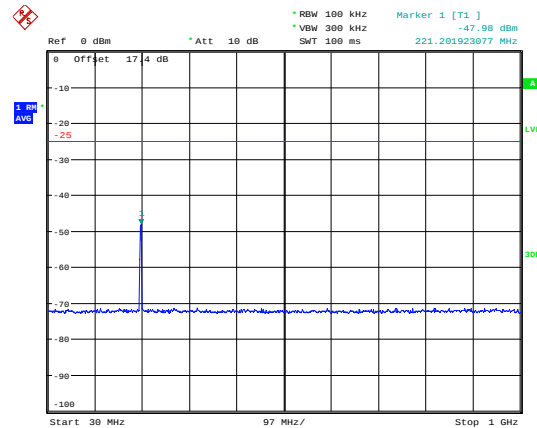


Date: 15.APR.2019 12:55:58

LTE Band 7 5MHz CH-Low 1GHz~3GHz

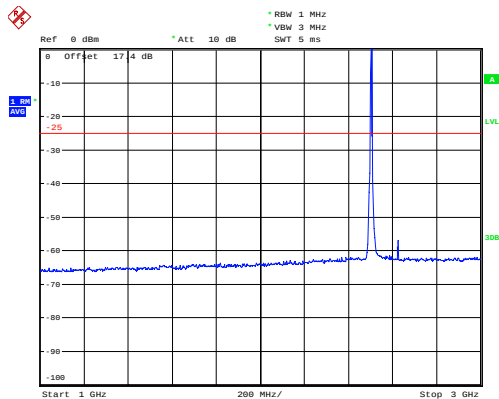


Date: 15.APR.2019 13:03:24

LTE Band 7 5MHz CH-Middle 1GHz~3GHz

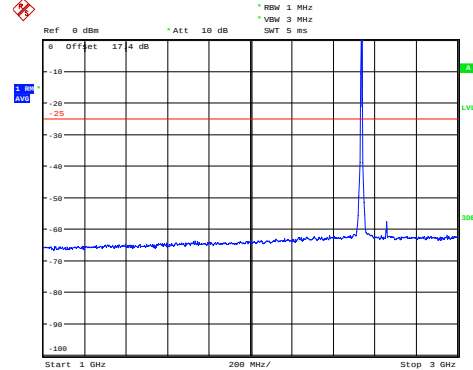


Date: 15.APR.2019 13:03:34

LTE Band 7 5MHz CH-Low 3GHz~26GHz

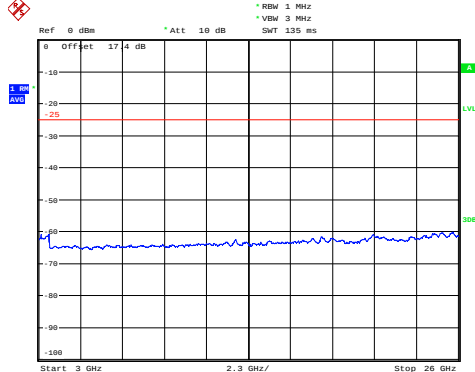

Date: 15.APR.2019 13:05:40


LTE Band 7 5MHz CH-Middle 3GHz~26GHz

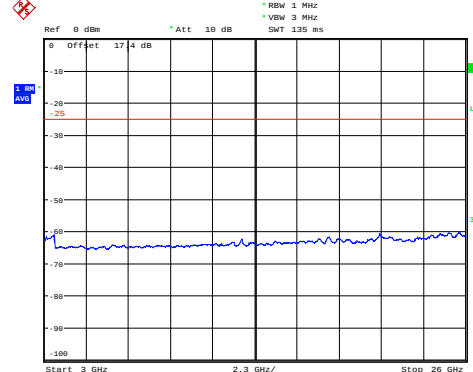

Date: 15.APR.2019 13:06:01




LTE Band 7 5MHz CH-High 30MHz~1GHz

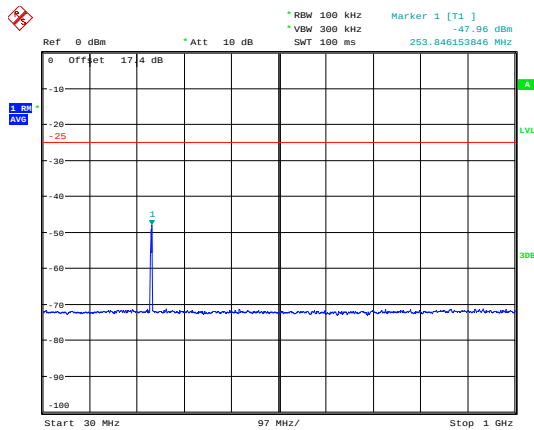


Date: 15.APR.2019 12:56:21

LTE Band 7 10MHz CH-Low 30MHz~1GHz

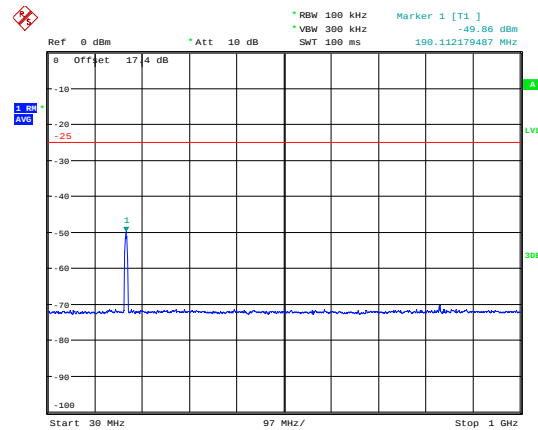


Date: 15.APR.2019 12:58:29

LTE Band 7 5MHz CH-High 1GHz~3GHz

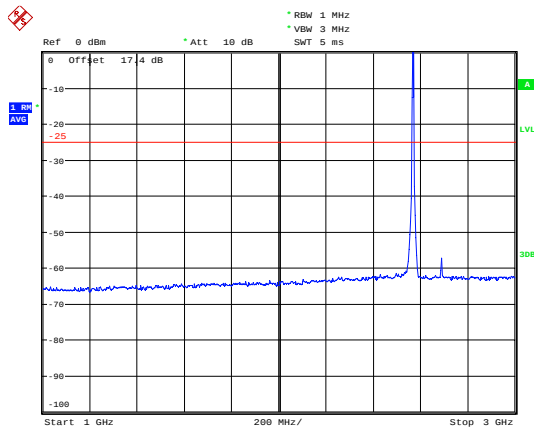


Date: 15.APR.2019 13:03:45

LTE Band 7 10MHz CH-Low 1GHz~3GHz

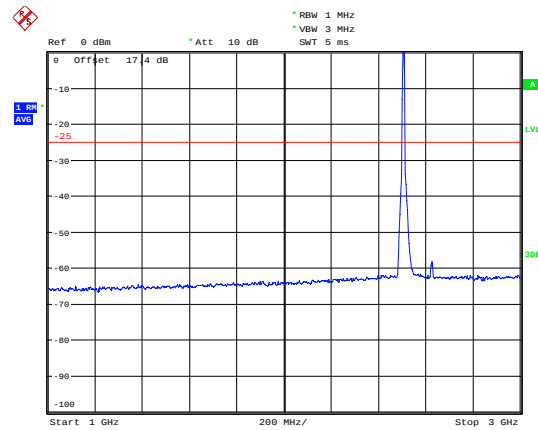


Date: 15.APR.2019 13:04:03

LTE Band 7 5MHz CH-High 3GHz~26GHz

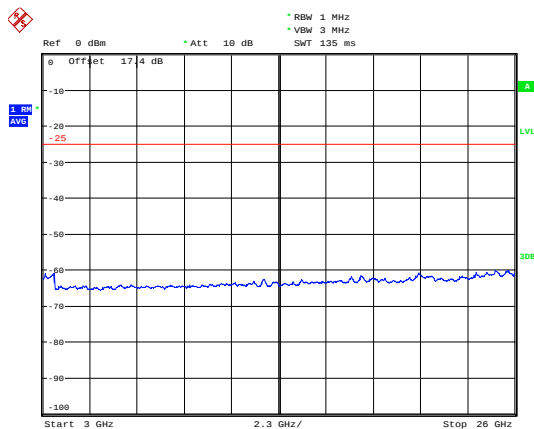

Date: 15.APR.2019 13:06:16


LTE Band 7 10MHz CH-Low 3GHz~26GHz

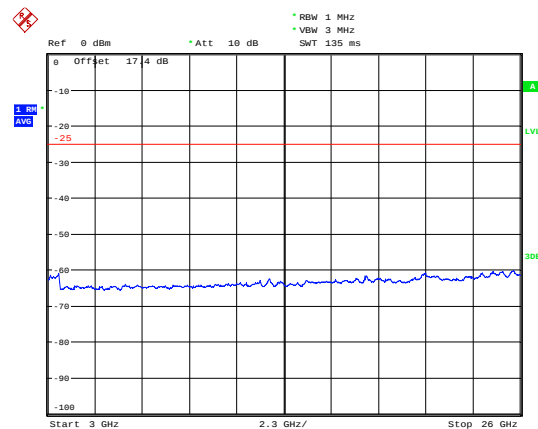

Date: 15.APR.2019 13:06:37




LTE Band 7 10MHz CH-Middle 30MHz~1GHz

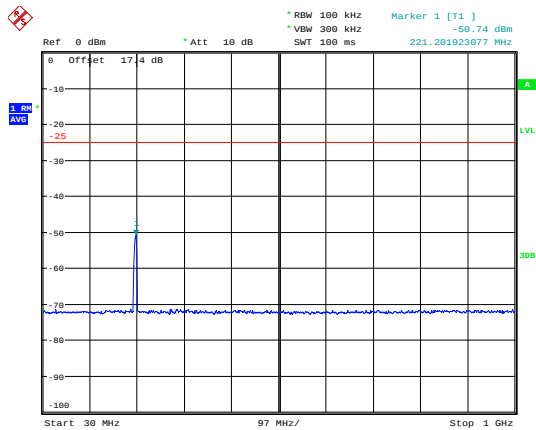


Date: 15.APR.2019 12:58:43

LTE Band 7 10MHz CH-High 30MHz~1GHz

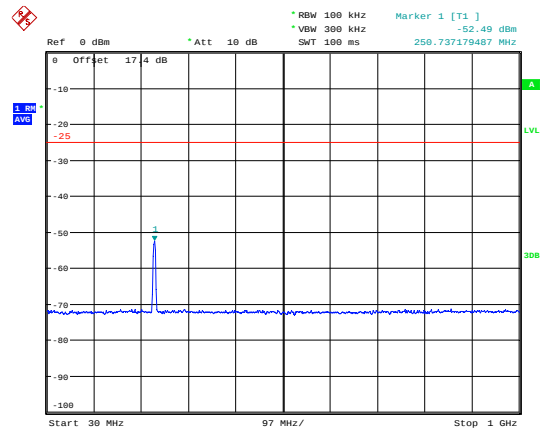


Date: 15.APR.2019 12:58:57

LTE Band 7 10MHz CH-Middle 1GHz~3GHz

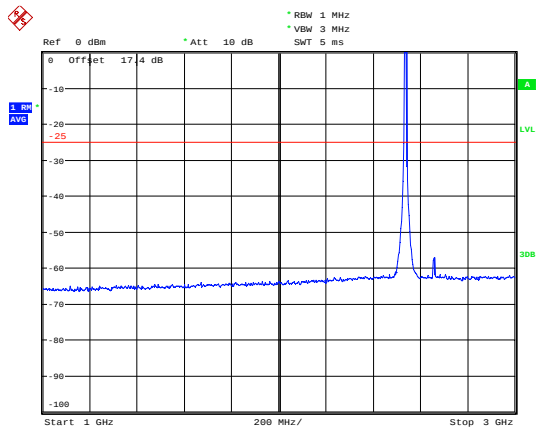


Date: 15.APR.2019 13:04:18

LTE Band 7 10MHz CH-High 1GHz~3GHz

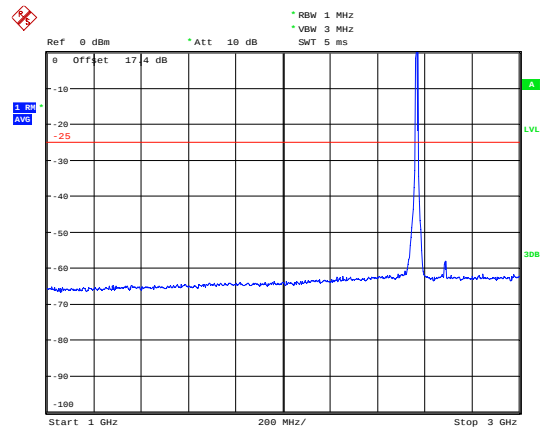


Date: 15.APR.2019 13:04:29

LTE Band 7 10MHz CH-Middle 3GHz~26GHz

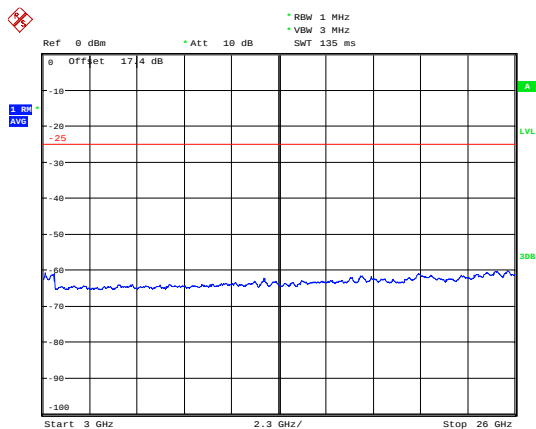

Date: 15.APR.2019 13:06:45


LTE Band 7 10MHz CH-High 3GHz~26GHz

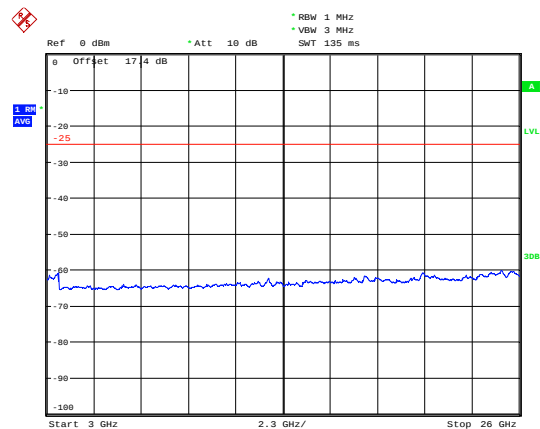

Date: 15.APR.2019 13:06:57




LTE Band 7 15MHz CH-Low 30MHz~1GHz

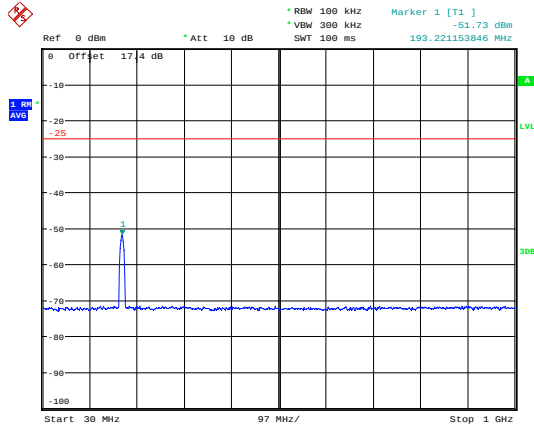


Date: 15.APR.2019 12:59:20

LTE Band 7 15MHz CH-Middle 30MHz~1GHz

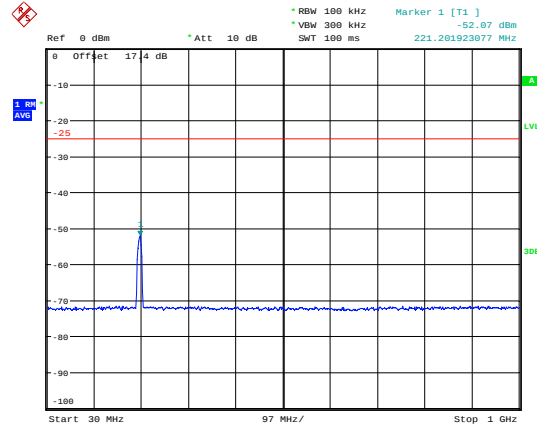


Date: 15.APR.2019 12:59:35

LTE Band 7 15MHz CH-Low 1GHz~3GHz

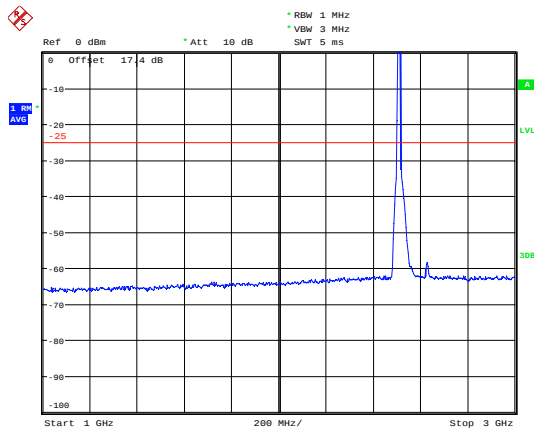


Date: 15.APR.2019 13:04:44

LTE Band 7 15MHz CH-Middle 1GHz~3GHz

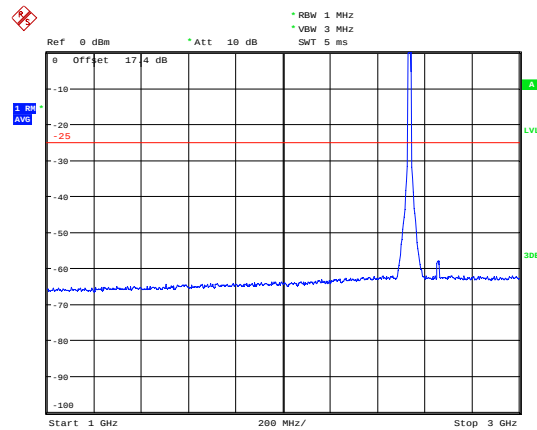


Date: 15.APR.2019 13:04:53

LTE Band 7 15MHz CH-Low 3GHz~26GHz

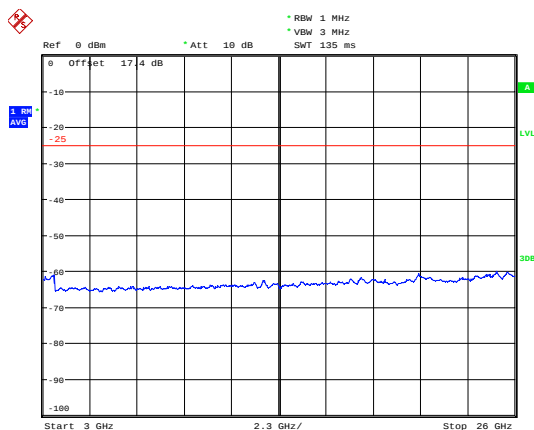

Date: 15.APR.2019 13:07:18


LTE Band 7 15MHz CH-Middle 3GHz~26GHz

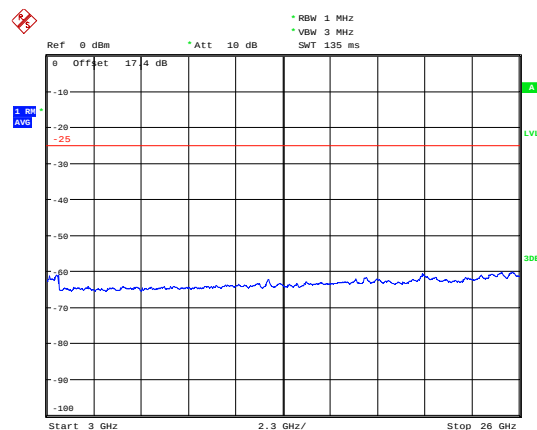

Date: 15.APR.2019 13:07:28




LTE Band 7 15MHz CH-High 30MHz~1GHz

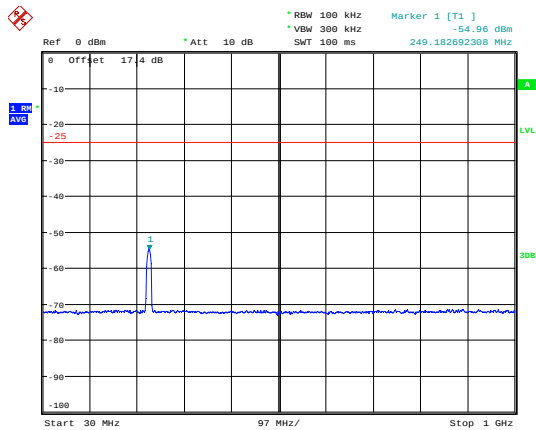


Date: 15.APR.2019 12:59:50

LTE Band 7 20MHz CH-Low 30MHz~1GHz

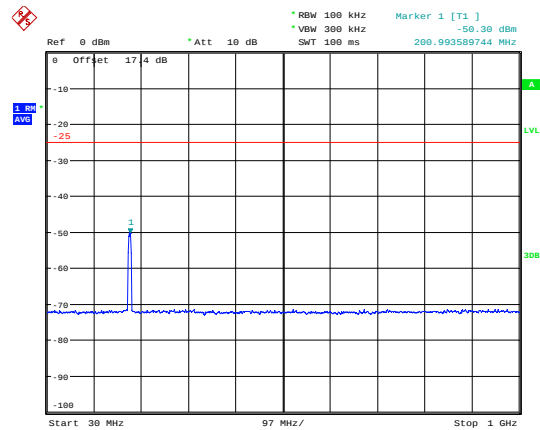


Date: 15.APR.2019 13:00:00

LTE Band 7 15MHz CH-High 1GHz~3GHz

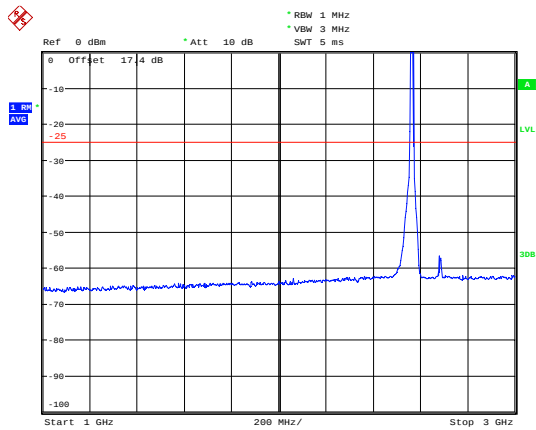


Date: 15.APR.2019 13:05:09

LTE Band 7 20MHz CH-Low 1GHz~3GHz

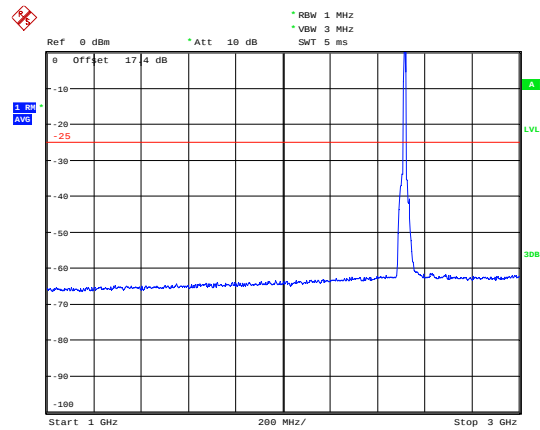


Date: 15.APR.2019 13:03:06

LTE Band 7 15MHz CH-High 3GHz~26GHz

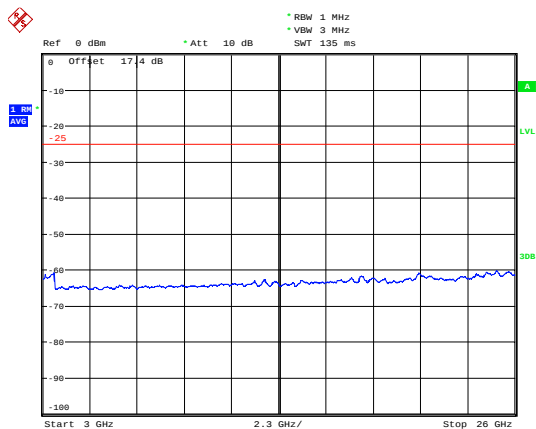

Date: 15.APR.2019 13:07:41


LTE Band 7 20MHz CH-Low 3GHz~26GHz

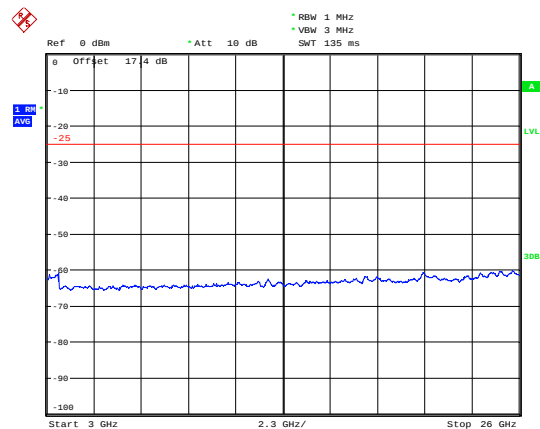

Date: 15.APR.2019 13:08:10




LTE Band 7 20MHz CH-Middle 30MHz~1GHz

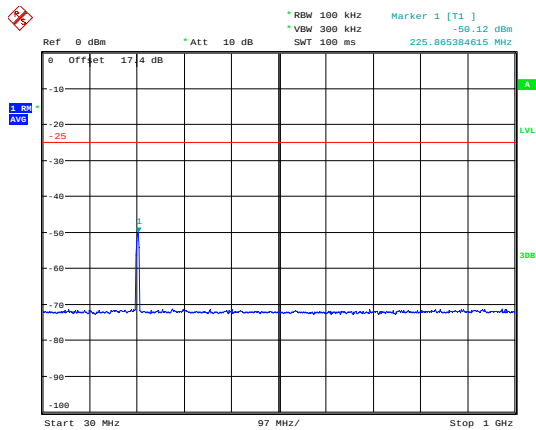


Date: 15.APR.2019 13:00:22

LTE Band 7 20MHz CH-High 30MHz~1GHz

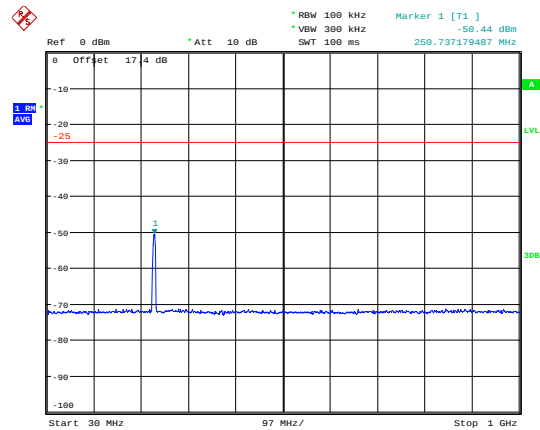


Date: 15.APR.2019 13:00:34

LTE Band 7 20MHz CH-Middle 1GHz~3GHz

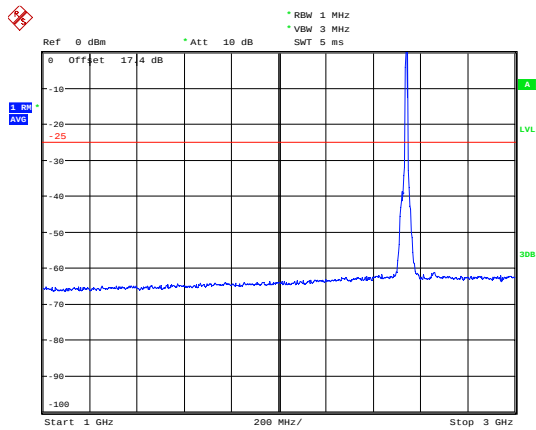


Date: 15.APR.2019 13:02:56

LTE Band 7 20MHz CH-High 1GHz~3GHz

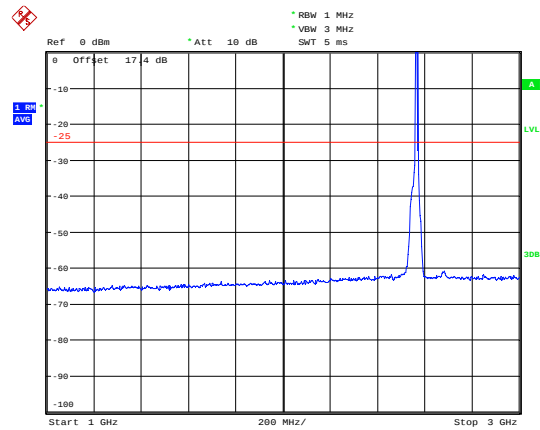


Date: 15.APR.2019 13:02:47

LTE Band 7 20MHz CH-Middle 3GHz~26GHz

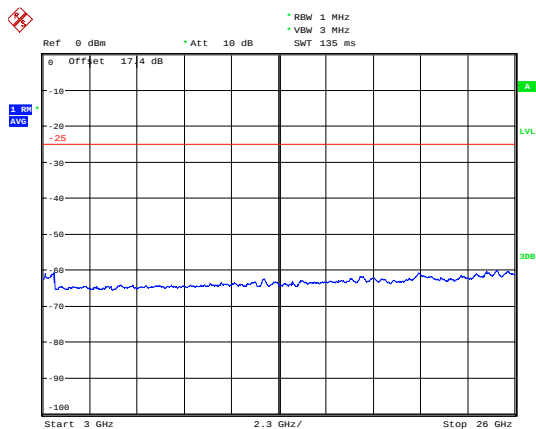

Date: 15.APR.2019 13:08:19

LTE Band 7 20MHz CH-High 3GHz~26GHz

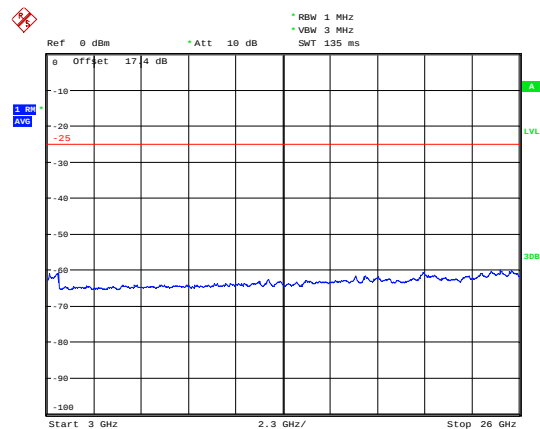

Date: 15.APR.2019 13:08:29

5.8 Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz ,RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP

= EIRP-2.15dBi.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

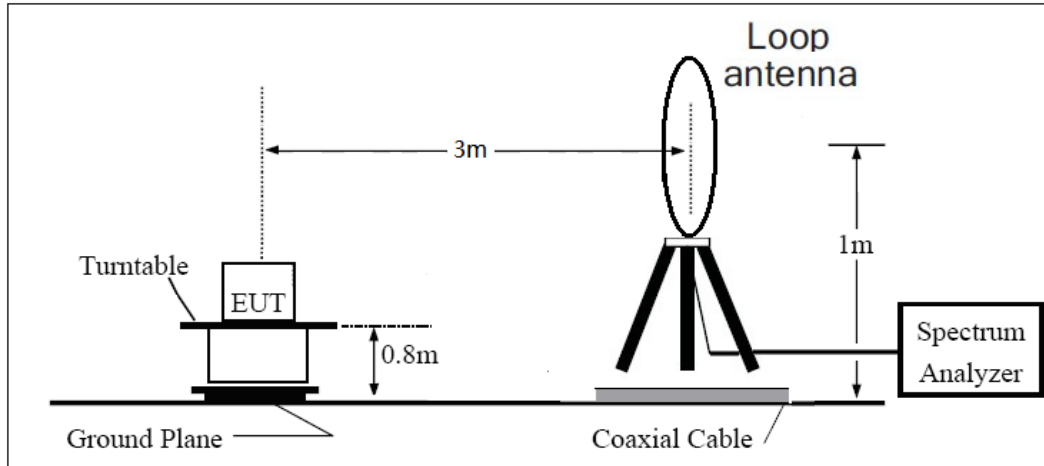

30MHz ~ 1GHz

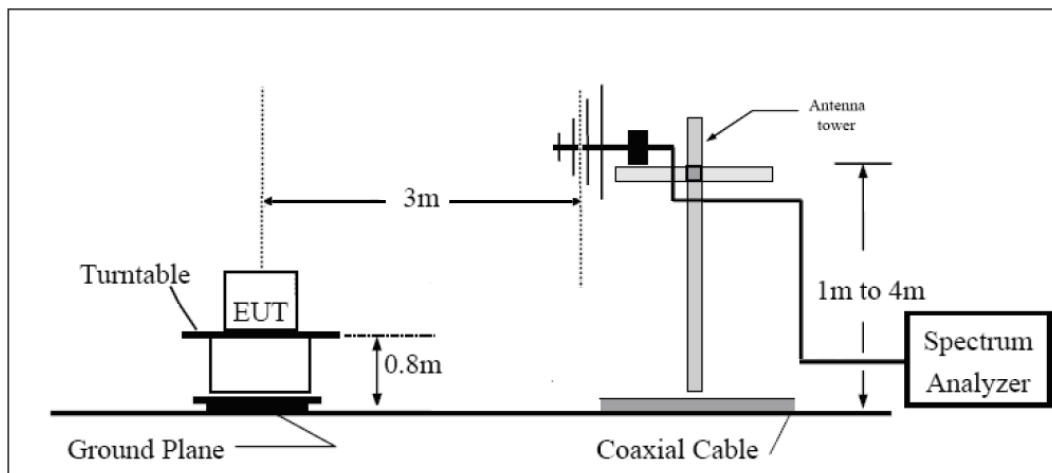

Above 1GHz

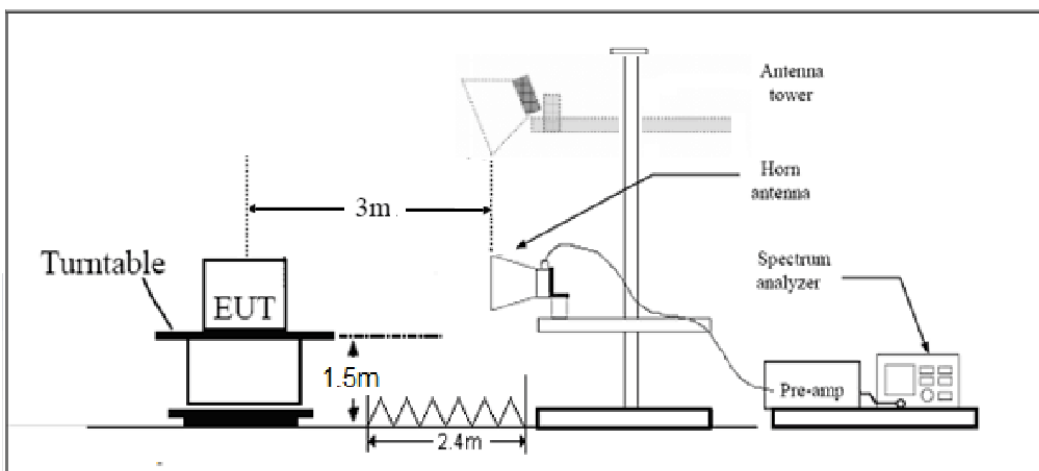

Note: Area side:2.4mX3.6m

**Limits**

Rule Part 27.53(m) $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

Part 27.53(m) Limit	-25 dBm
---------------------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.

Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

Variant

LTE Band 7 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5065.80	-71.23	2.00	9.15	Horizontal	-64.08	-25.00	39.08	45
3	7598.60	-57.58	2.50	11.35	Horizontal	-48.73	-25.00	23.73	90
4	10130.63	-57.24	4.20	12.05	Horizontal	-49.39	-25.00	24.39	135
5	12675.00	-67.37	5.20	12.85	Horizontal	-59.72	-25.00	34.72	225
6	15210.00	-65.43	5.50	14.23	Horizontal	-56.70	-25.00	31.70	90
7	17745.00	-62.55	5.70	14.15	Horizontal	-54.10	-25.00	29.10	180
8	20280.00	--	--	--	--	--	--	--	--
9	22815.00	--	--	--	--	--	--	--	--
10	25350.00	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 7 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5052.38	-72.03	2.00	10.15	Horizontal	-63.88	-25.00	38.88	45
3	7605.00	-60.04	2.50	11.35	Horizontal	-51.19	-25.00	26.19	0
4	10140.00	-59.95	4.20	12.05	Horizontal	-52.10	-25.00	27.10	315
5	12675.00	-69.81	5.20	14.85	Horizontal	-60.16	-25.00	35.16	90
6	15210.00	-64.39	5.50	13.23	Horizontal	-56.66	-25.00	31.66	225
7	17745.00	-60.49	5.70	12.15	Horizontal	-54.04	-25.00	29.04	45
8	20280.00	--	--	--	--	--	--	--	--
9	22815.00	--	--	--	--	--	--	--	--
10	25350.00	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

6 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2018-05-20	2019-05-19
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2018-05-20	2019-05-19
Signal Analyzer	R&S	FSV30	100815	2018-12-16	2019-12-15
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2019-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2019-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Signal generator	R&S	SMB 100A	102594	2018-05-20	2019-05-19
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2018-05-20	2019-05-19
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2018-05-21	2019-05-20
RF Cable	Agilent	SMA 15cm	0001	2019-03-15	2019-06-14
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****

ANNEX A: Product change description

Huawei Technologies Co., Ltd.

Difference Declaration Letter

Article 1: Difference description:

The difference between model AMN-LX9X and model KSA-LX9X is show in the below table:

	Model	AMN-LX9X	KSA-LX9X
Licensed Frequency	LTE BAND	the same	the same
	UMTS BAND	the same	the same
	GSM	the same	the same
	IC	the same	the same
	Antenna	the same	the same
	RF conducted power	the same	the same
Unlicensed Frequency	Bluetooth	the same	the same
	2.4G Wi-Fi	the same	the same
	IC	the same	the same
	Antenna	the same	the same
Hardware	Ram / Rom	the same	the same
	Camera	the same	the same
	PCB	the same	the same
	USB Port	the same	the same
	SIM	the same	the same
Appearance	Dimension	the same	Only the rear camera has a different curved appearance
	Color	the same	the same
Accessory	Battery	the same	the same
	Charger	the same	the same
	USB label	the same	the same
	Earphone	the same	the same