



Appendix B. SAR Measurement Plots

Table of contents
UMTS Band II
LTE Band VII
LTE Band XLI
WIFI 2.4G
BT

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXX UMTS Band II 9538CH Front Side 10mm with battery2

DUT: LEO-DLXX; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.438$ S/m; $\epsilon_r = 38.751$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(8.35, 8.35, 8.35); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (7x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.464 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.03 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.680 W/kg

SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.247 W/kg

Maximum value of SAR (measured) = 0.497 W/kg

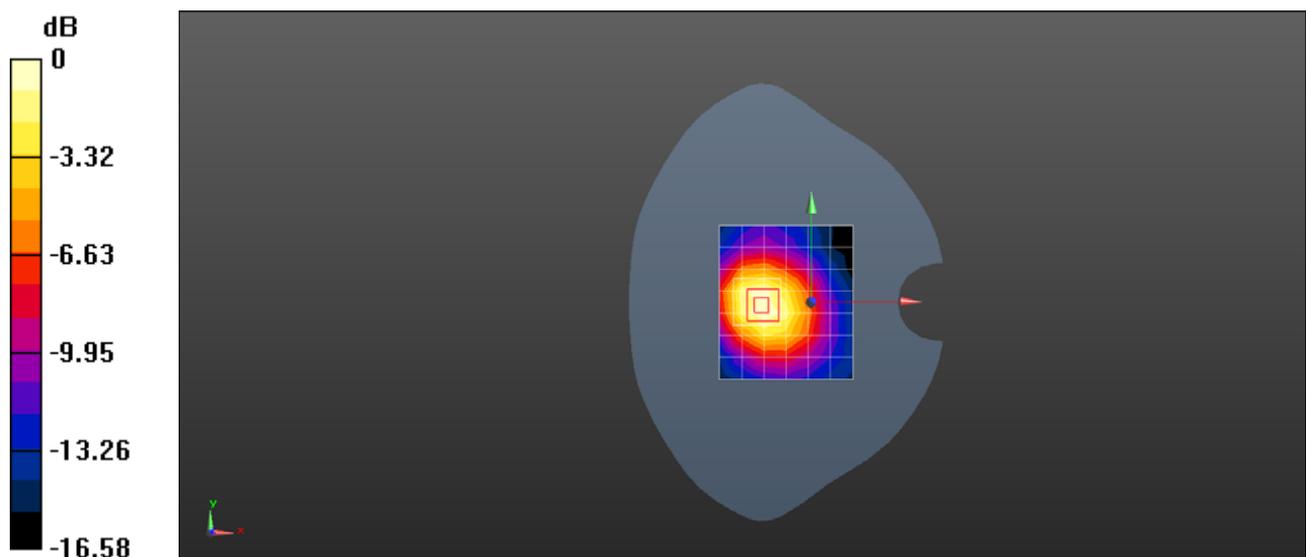

0 dB = 0.464 W/kg = -3.33 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXXE UMTS Band II 9538CH Front Side 10mm with battery2

DUT: LEO-DLXXE; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.438$ S/m; $\epsilon_r = 38.751$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(8.35, 8.35, 8.35); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (7x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.688 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.22 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.989 W/kg

SAR(1 g) = 0.607 W/kg; SAR(10 g) = 0.355 W/kg

Maximum value of SAR (measured) = 0.729 W/kg

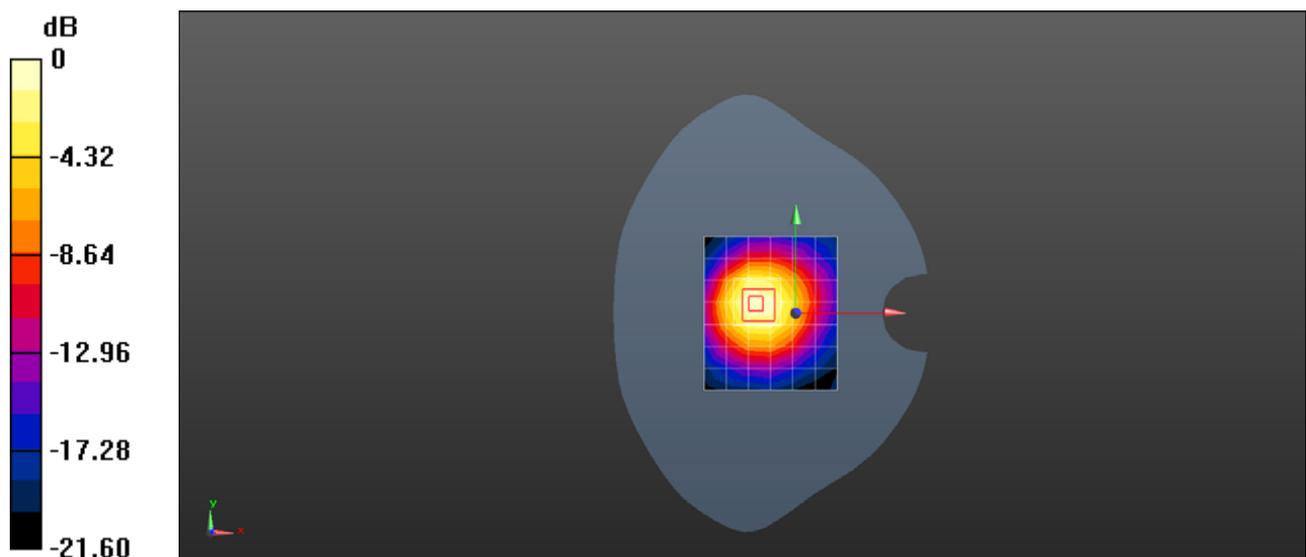

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXX UMTS Band II 9400CH Back Side 0mm battery2

DUT: LEO-DLXX; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.554$ S/m; $\epsilon_r = 53.367$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.95, 7.95, 7.95); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (7x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.97 W/kg


Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 30.83 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.57 W/kg

SAR(1 g) = 1.54 W/kg; SAR(10 g) = 0.993 W/kg

Maximum value of SAR (measured) = 1.83 W/kg

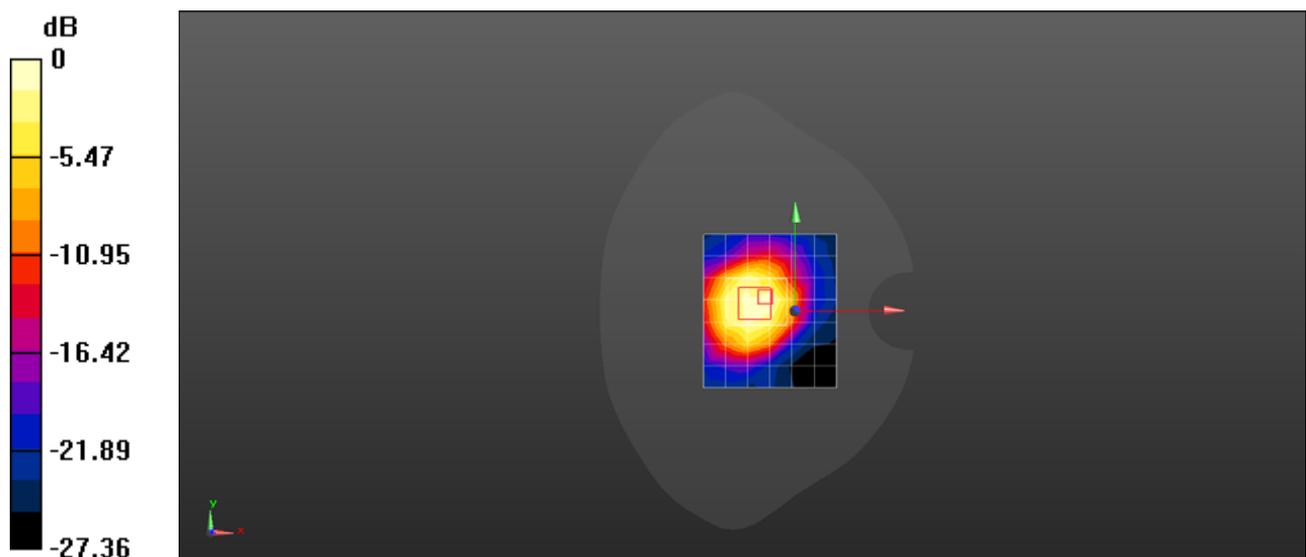

0 dB = 1.97 W/kg = 2.94 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXXE UMTS Band II 9400CH Back Side 0mm with battery2

DUT: LEO-DLXXE; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.554$ S/m; $\epsilon_r = 53.367$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.95, 7.95, 7.95); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.16 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.82 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 1.52 W/kg; SAR(10 g) = 0.960 W/kg

Maximum value of SAR (measured) = 2.01 W/kg

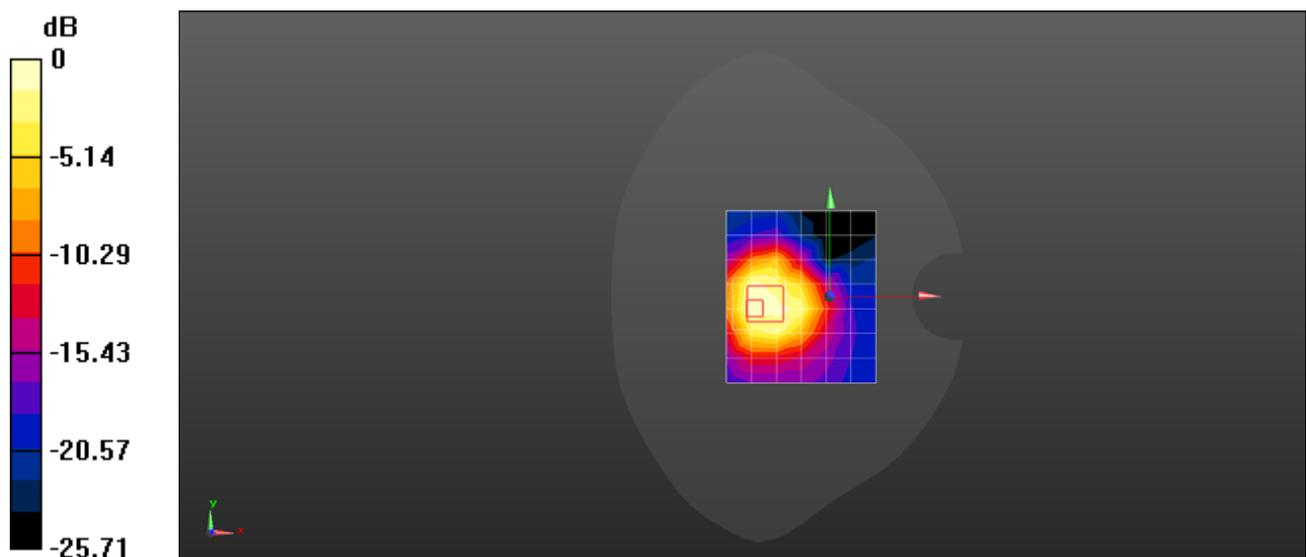

0 dB = 2.16 W/kg = 3.33 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXX LTE Band VII 20M QPSK 1RB 50 offset 21100CH Front Side 10mm with battery2

DUT: LEO-DLXX; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.774$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.27, 7.27, 7.27); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (8x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.956 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.77 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.875 W/kg; SAR(10 g) = 0.404 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

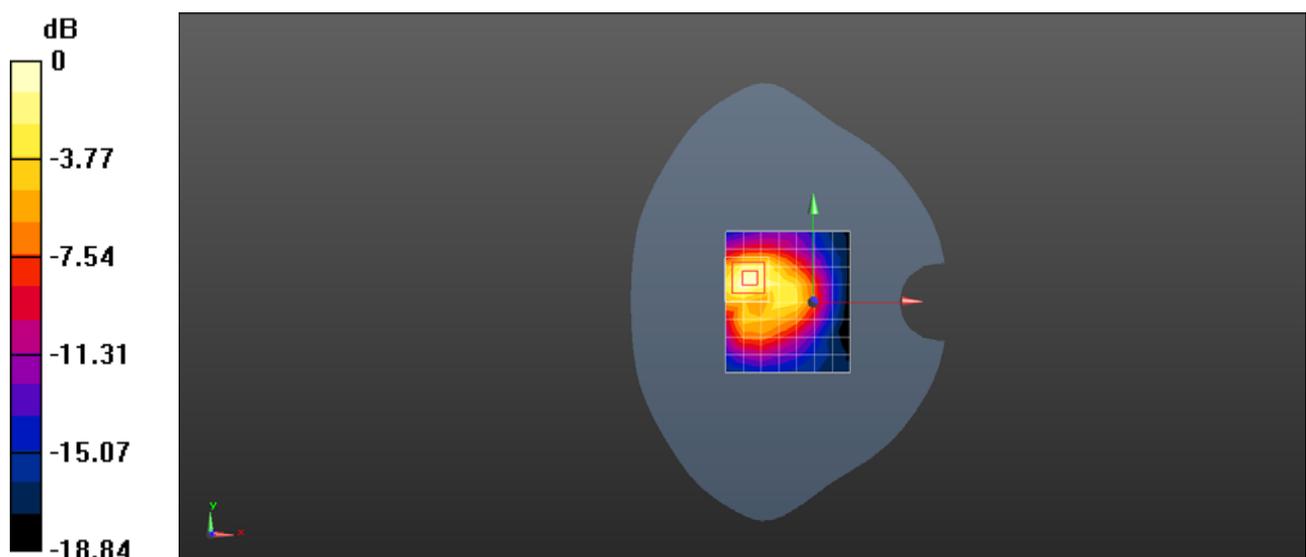

0 dB = 0.956 W/kg = -0.19 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXXE LTE Band VII 20M QPSK 1RB 50 offset 21100CH Front Side 10mm with battery2

DUT: LEO-DLXXE; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.774$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.27, 7.27, 7.27); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.925 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.85 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.929 W/kg; SAR(10 g) = 0.431 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

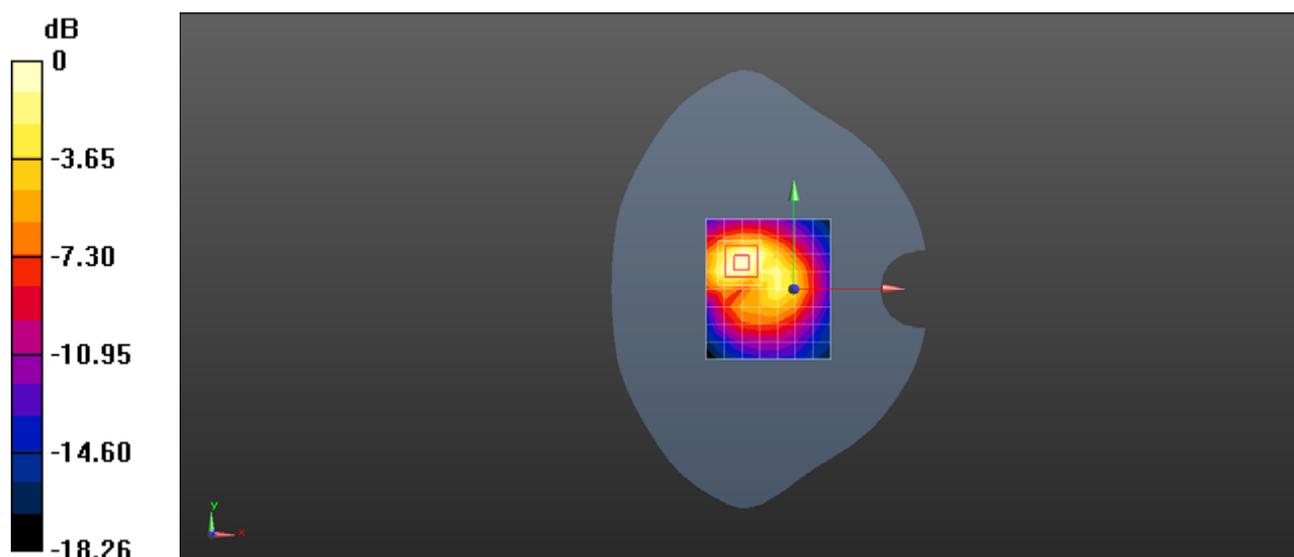

0 dB = 0.925 W/kg = -0.34 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXX LTE Band VII 20M QPSK 1RB 50 offset 21100CH Back Side 0mm with battery2

DUT: LEO-DLXX; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.139$ S/m; $\epsilon_r = 52.497$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.19, 7.19, 7.19); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 3.67 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.455 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 6.45 W/kg

SAR(1 g) = 2.79 W/kg; SAR(10 g) = 1.06 W/kg

Maximum value of SAR (measured) = 4.02 W/kg

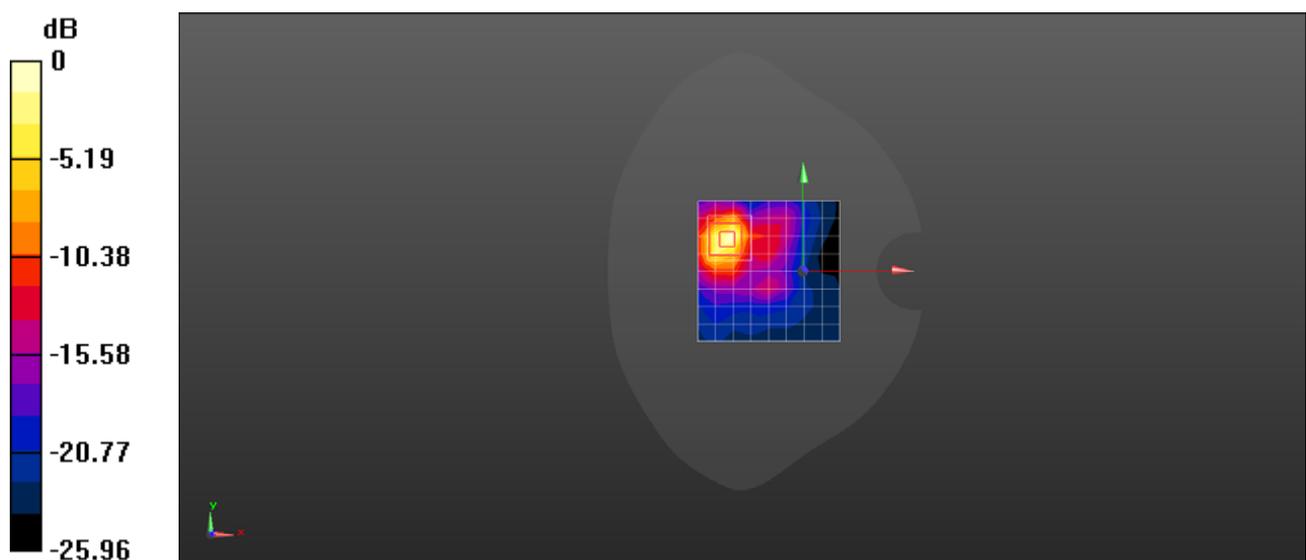

0 dB = 3.67 W/kg = 5.65 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXXE LTE Band VII 20M QPSK 1RB 50 offset 21100CH Back Side 0mm with battery2

DUT: LEO-DLXXE; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.139$ S/m; $\epsilon_r = 52.497$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.19, 7.19, 7.19); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 3.53 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.42 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 5.96 W/kg

SAR(1 g) = 2.47 W/kg; SAR(10 g) = 0.977 W/kg

Maximum value of SAR (measured) = 3.44 W/kg

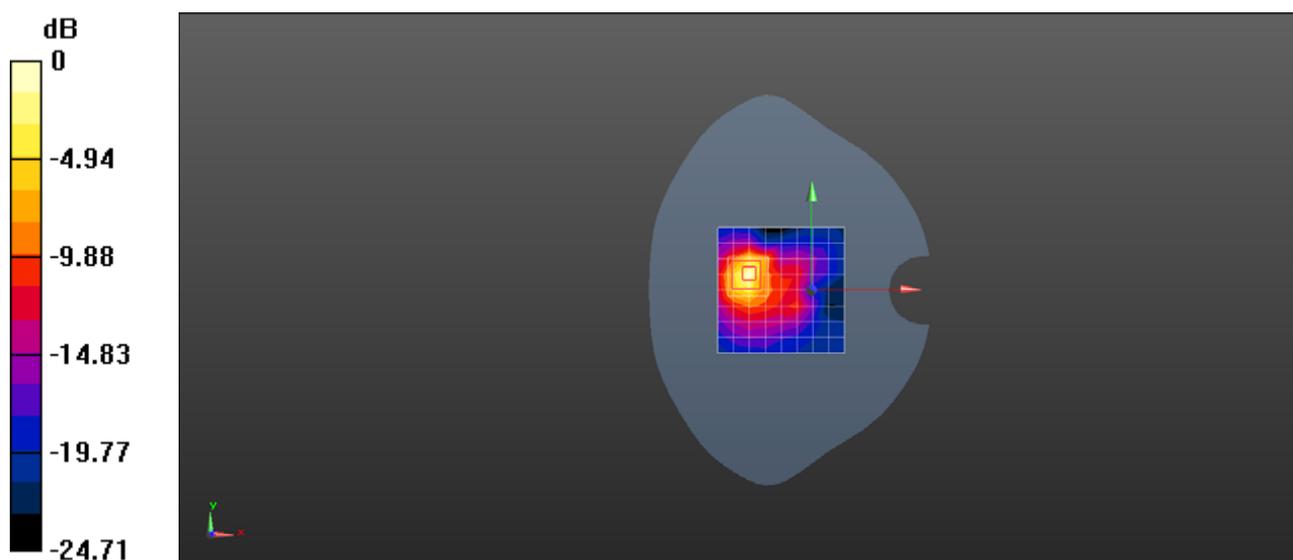

0 dB = 3.53 W/kg = 5.48 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXX LTE Band XLI 20M QPSK 1RB 50 offset 40340CH Front Side 10mm with battery2

DUT: LEO-DLXX; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.58855

Medium parameters used: $f = 2565$ MHz; $\sigma = 1.908$ S/m; $\epsilon_r = 38.675$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.27, 7.27, 7.27); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.402 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.658 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.685 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.453 W/kg

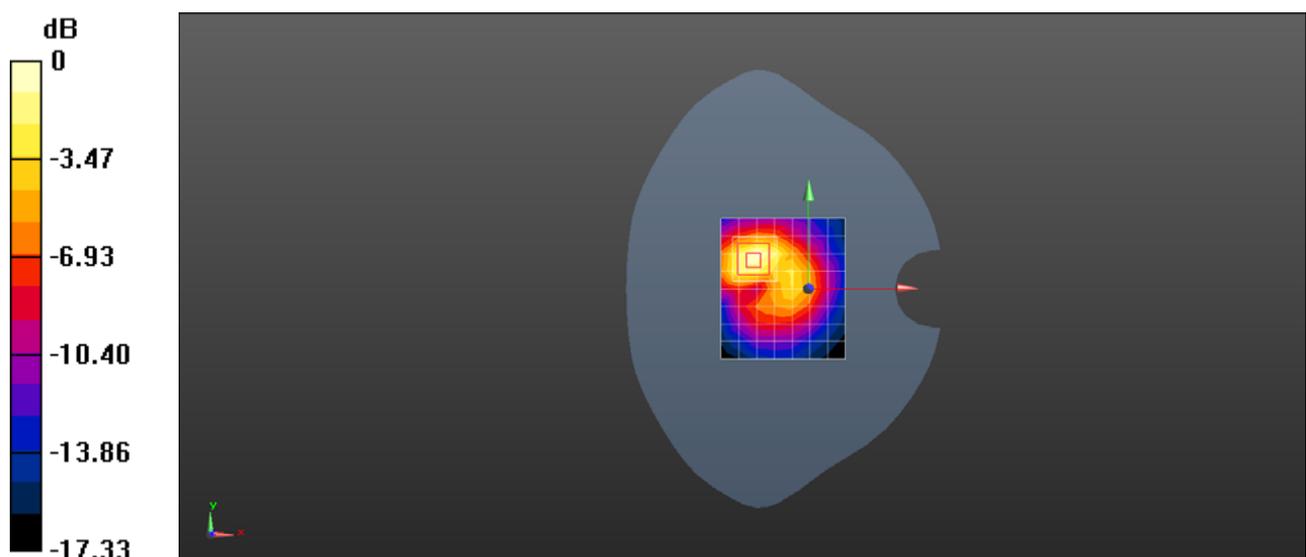

0 dB = 0.402 W/kg = -3.96 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXXE LTE Band XLI 20M QPSK 1RB 50 offset 40340CH Front Side 10mm with battery2

DUT: LEO-DLXXE; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.58855

Medium parameters used: $f = 2565$ MHz; $\sigma = 1.908$ S/m; $\epsilon_r = 38.675$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.27, 7.27, 7.27); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.399 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.945 V/m; Power Drift = -0.33 dB

Peak SAR (extrapolated) = 0.742 W/kg

SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.485 W/kg

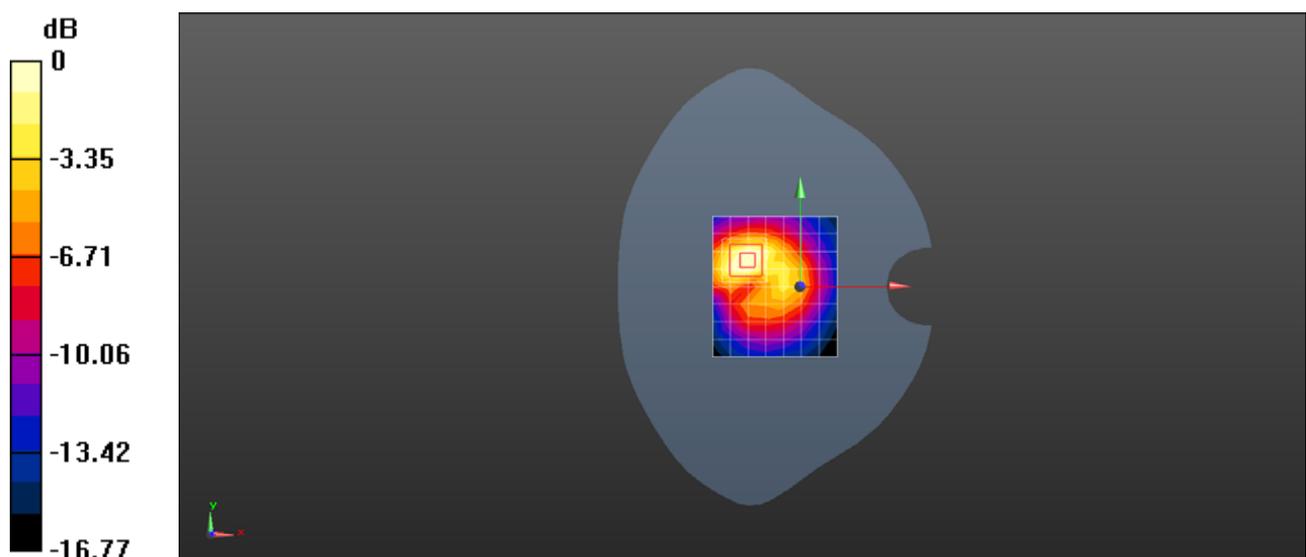

0 dB = 0.399 W/kg = -3.99 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXX LTE Band XLI 20M QPSK 1RB 50 offset 40340CH Back Side 0mm with battery2

DUT: LEO-DLXX; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.58855

Medium parameters used: $f = 2565$ MHz; $\sigma = 2.168$ S/m; $\epsilon_r = 52.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.19, 7.19, 7.19); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.03 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.927 V/m; Power Drift = 0.23 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.897 W/kg; SAR(10 g) = 0.343 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

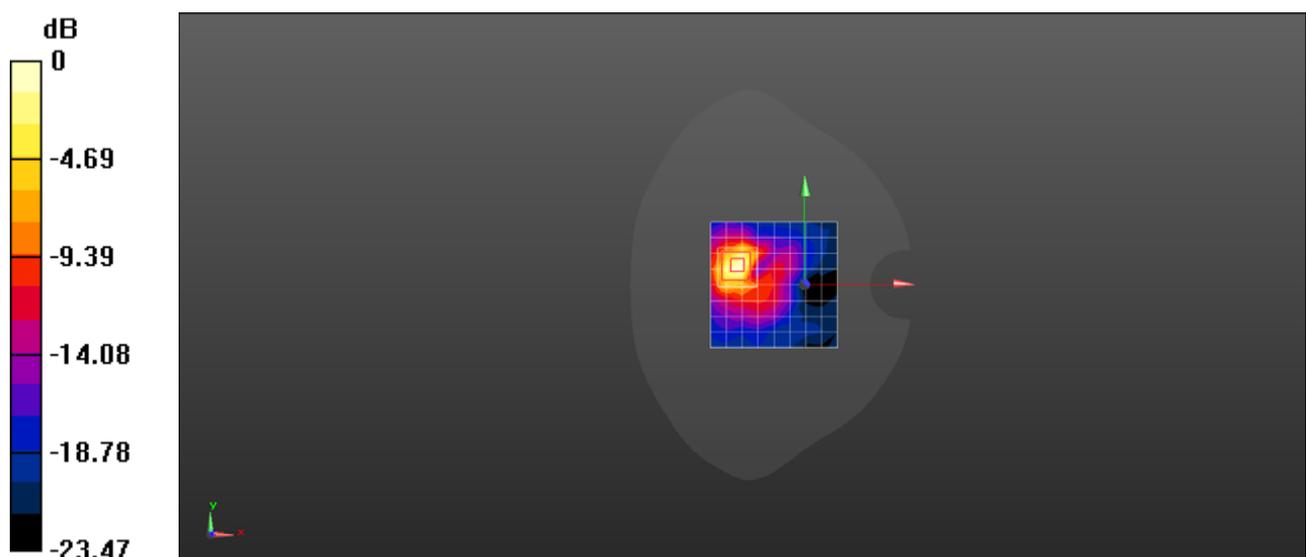

0 dB = 1.03 W/kg = 0.13 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXXE LTE Band XLI 20M QPSK 1RB 50 offset 40340CH Back Side 0mm with battery2

DUT: LEO-DLXXE; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.58855

Medium parameters used: $f = 2565$ MHz; $\sigma = 2.168$ S/m; $\epsilon_r = 52.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.19, 7.19, 7.19); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.939 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.37 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.680 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 0.885 W/kg

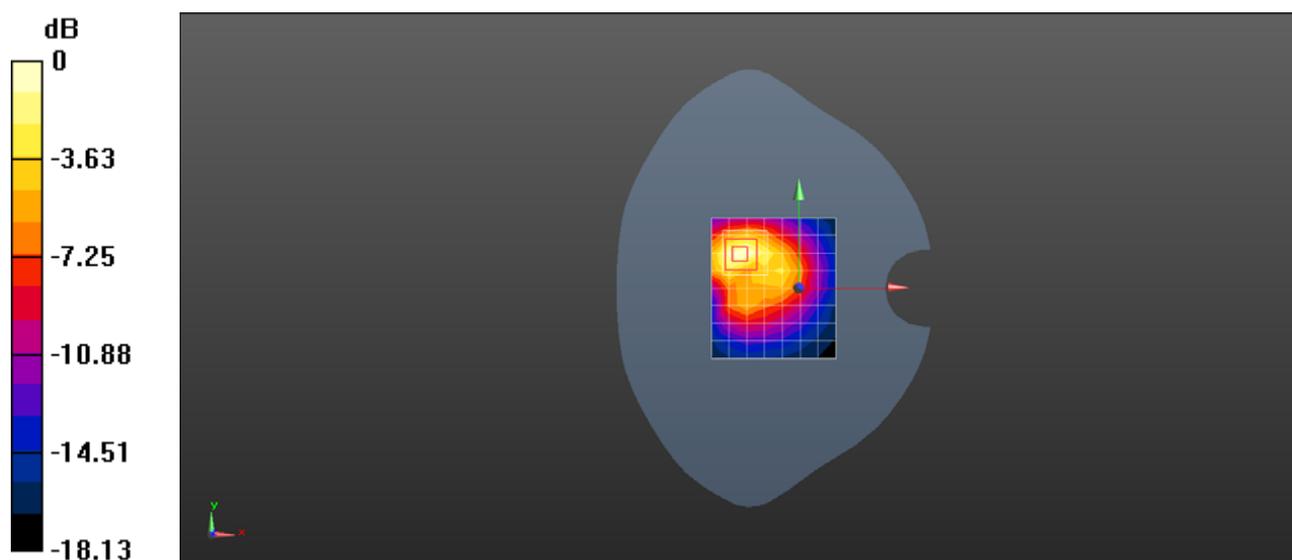

0 dB = 0.939 W/kg = -0.28 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXX WiFi 2.4G 802.11b 1CH Front Side 10mm battery2

DUT: LEO-DLXX; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.789$ S/m; $\epsilon_r = 40.053$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.39, 7.39, 7.39); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (8x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.119 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.303 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.0876 W/kg

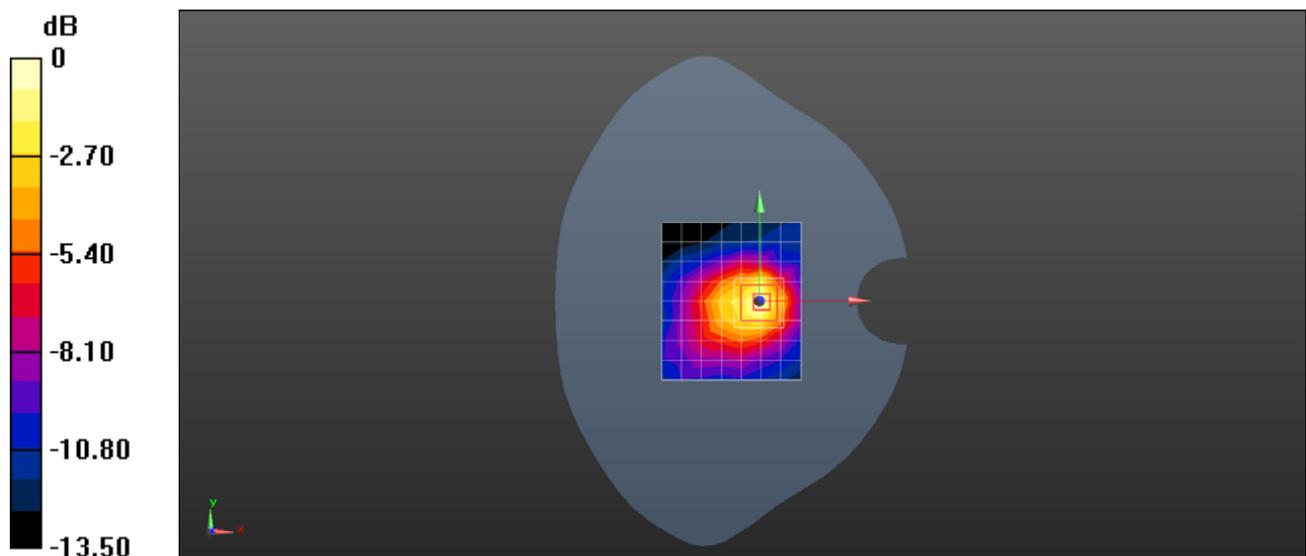

0 dB = 0.119 W/kg = -9.24 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXX WiFi 2.4G 802.11b 6CH Back Side 0mm battery2

DUT: LEO-DLXX; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2437 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.974$ S/m; $\epsilon_r = 54.004$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.45, 7.45, 7.45); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.232 W/kg



Configuration/Body/Zoom Scan (8x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.571 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.241 W/kg

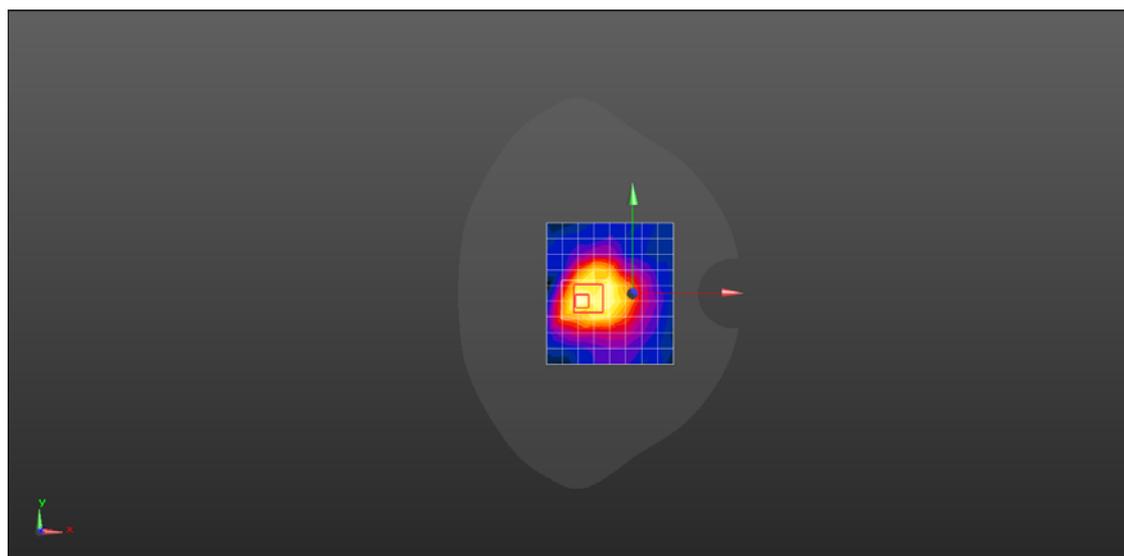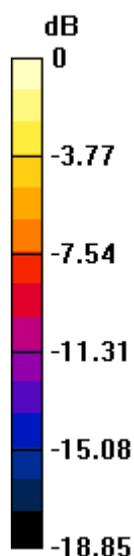

0 dB = 0.232 W/kg = -6.34 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXXE WiFi 2.4G 802.11b 6CH Front Side 10mm battery2

DUT: LEO-DLXXE; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2437 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.813 \text{ S/m}$; $\epsilon_r = 39.961$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.39, 7.39, 7.39); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.145 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 6.563 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.226 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.154 W/kg

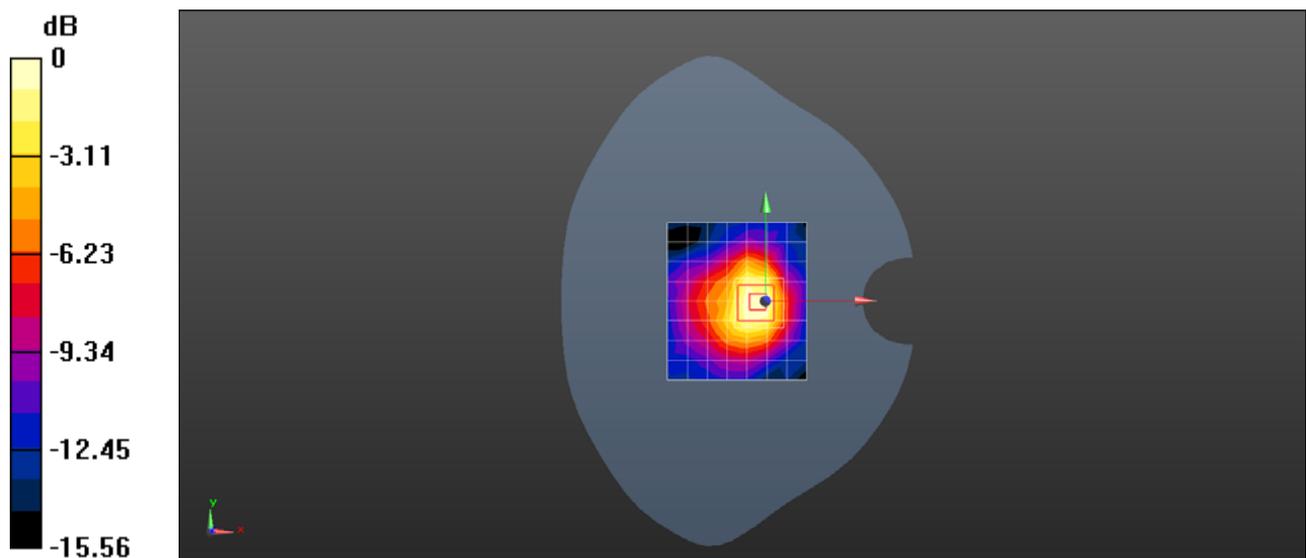

0 dB = 0.145 W/kg = -8.39 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXXE WiFi 2.4G 802.11b 6CH Back Side 0mm battery2

DUT: LEO-DLXXE; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.974$ S/m; $\epsilon_r = 54.004$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.45, 7.45, 7.45); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (8x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.185 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.699 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.239 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

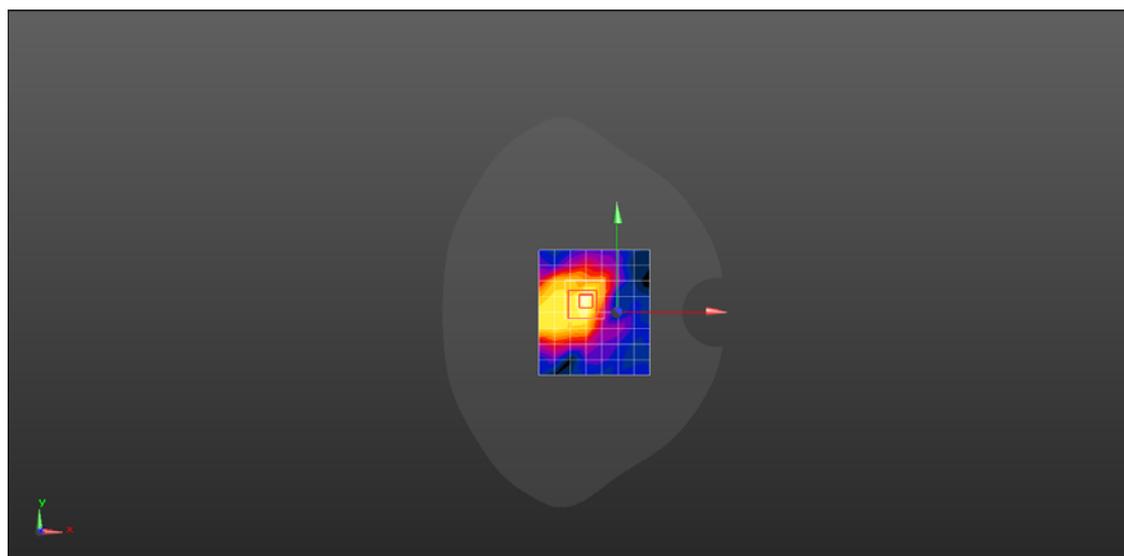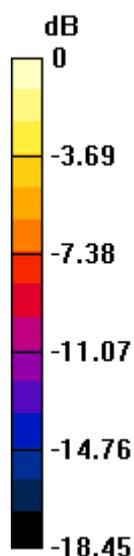

0 dB = 0.185 W/kg = -7.32 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXX BT DH5 78CH Back Side 0mm with battery2

DUT: LEO-DLXX; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, BT (0); Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2480$ MHz; $\sigma = 2.011$ S/m; $\epsilon_r = 53.915$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.45, 7.45, 7.45); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (8x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.0516 W/kg


Configuration/Body/Zoom Scan (8x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.064 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0618 W/kg

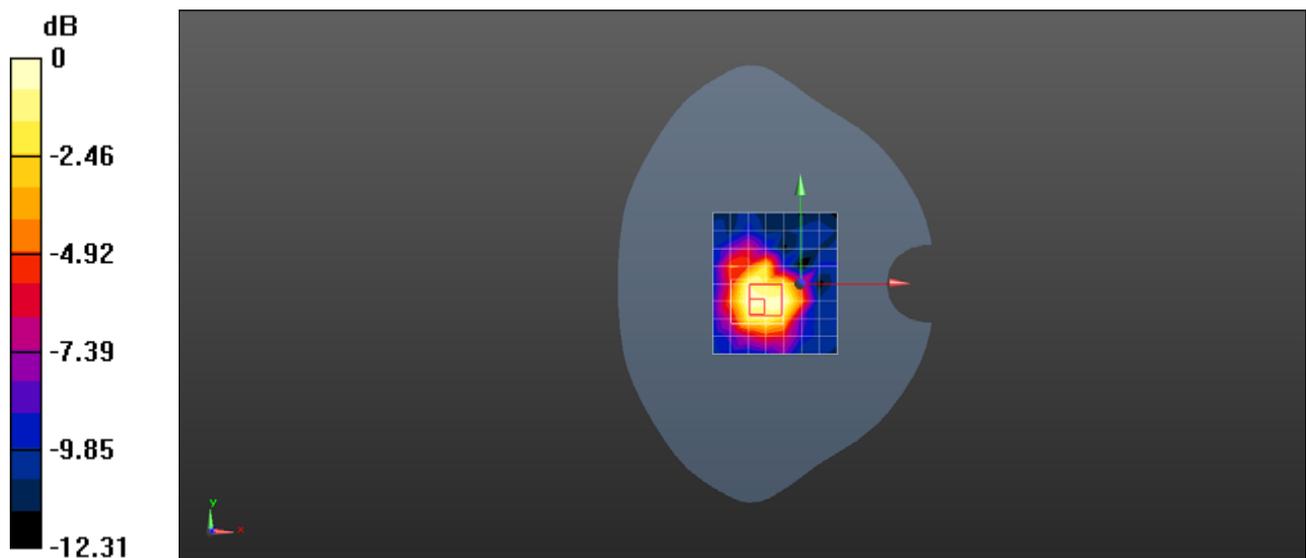

0 dB = 0.0516 W/kg = -12.87 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LEO-DLXXE BT DH5 78CH Back Side 0mm with battery2

DUT: LEO-DLXXE; Type: Smart Watch; Serial: SAR3

Communication System: UID 0, BT (0); Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2480$ MHz; $\sigma = 2.011$ S/m; $\epsilon_r = 53.915$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7381; ConvF(7.45, 7.45, 7.45); Calibrated: 2016/9/29;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1492; Calibrated: 2016/9/28
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (8x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.0549 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.489 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0572 W/kg

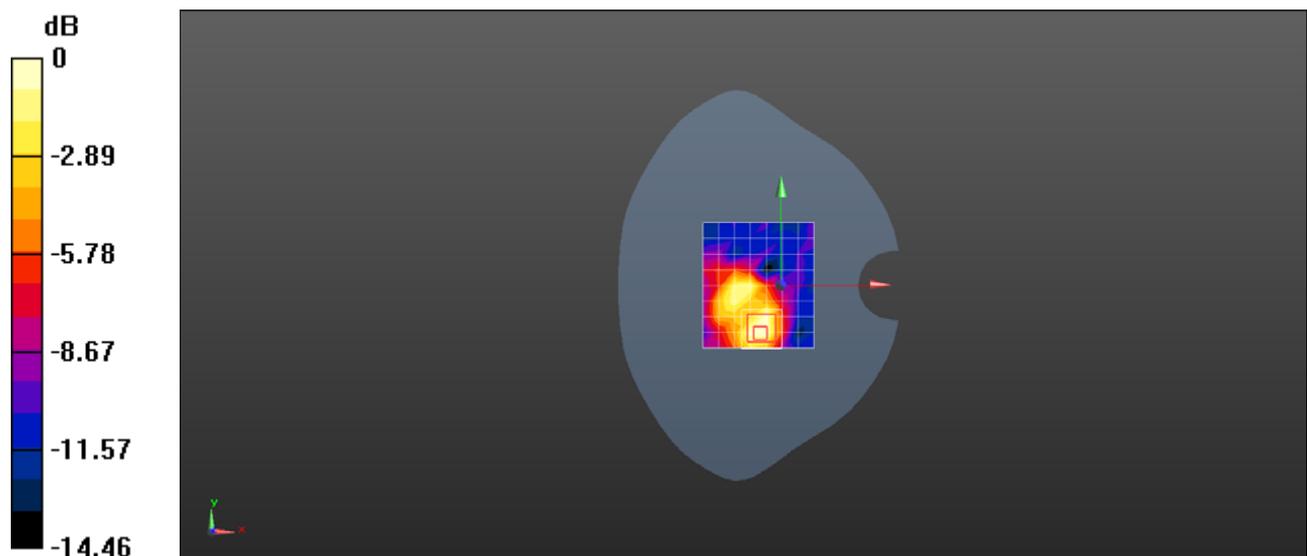

0 dB = 0.0549 W/kg = -12.60 dBW/kg