



FCC Test Report

FCC ID: QISM2-801W

This report concerns (check one): Original Grant Class I Change

Project No. : 1504C091C
Equipment : HUAWEI MediaPad M2 8.0
Model Name : M2-801w
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Apr. 13, 2015
Jun. 19, 2015
Date of Test : Apr. 13, 2015 ~ Apr. 30, 2015
Jun. 19, 2015 ~ Jun. 29, 2015
Issued Date : May. 11, 2015
Jun. 30, 2015
Tested by : BTL Inc.

Testing Engineer : 
(Pike Lee)
Technical Manager : 
(Jeff Yang)
Authorized Signatory : 
(Andy Chiu)

B T L I N C .

B1, No.37, Lane 365, Yang Guang St., NeiHu District,
Taipei City 114, Taiwan.

TEL:+886-2-2657-3299 FAX: +886-2- 2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION	14
4.1.2 MEASUREMENT INSTRUMENTS LIST	14
4.1.3 TEST PROCEDURE	15
4.1.4 DEVIATION FROM TEST STANDARD	15
4.1.5 TEST SETUP	15
4.1.6 EUT OPERATING CONDITIONS	15
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	39
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	39
4.2.2 MEASUREMENT INSTRUMENTS LIST	40
4.2.3 TEST PROCEDURE	40
4.2.4 DEVIATION FROM TEST STANDARD	40
4.2.5 TEST SETUP	41
4.2.6 EUT OPERATING CONDITIONS	41
4.2.7 TEST RESULTS-BETWEEN 30MHZ AND 1000MHZ	42
4.2.8 TEST RESULTS- ABOVE 1000MHZ	65
6. EUT TEST PHOTO	100

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1504C091	Original Issue.	May. 04, 2015
BTL-FCCE-1-1504C091A	Compared with previous report (BTL-FCCE-1-1504C091), model name is changed, and the GSM 850/1900, WCDMA 1900/850 and LTE band 2/4/5/7/26 function are not supported, which does not affect the test results, the rest are the same.	May. 11, 2015
BTL-FCCE-1-1504C091C	Compared with the previous report (BTL-FCCE-1-1504C091A), four adapters are added. In this test report records the new test results are quoted directly from report (BTL-FCCE-1-1504C091B) and the original models' test results are still remained.	Jun. 30, 2015

1. CERTIFICATION

Equipment : HUAWEI MediaPad M2 8.0
Brand Name : HUAWEI
Model Name : M2-801w
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Factory : BYD Huizhou Electronics Co.,Ltd.
Address : Xiangshui River Daya Bay Economic Development Zone Huizhou Guangdong
P.R China
Date of Test : Apr. 13, 2015 ~ Apr. 30, 2015
Jun. 19, 2015 ~ Jun. 29, 2015
Standard(s) : FCC Part 15, Subpart B :2014
ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1504C091C) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B:2014	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

(1) " N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2 .The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	Note
C02	CISPR	150 KHz~30MHz	2.59	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)	Note
CB08	CISPR	30MHz~200MHz	V	3.22	
		30MHz~200MHz	H	3.55	
		200MHz~ 1,000MHz	V	3.24	
		200MHz~ 1,000MHz	H	3.11	
		1,000MHz~18,000MHz	V	4.05	
		1,000MHz~18,000MHz	H	3.97	
		18,000MHz~40,000MHz	V	4.04	
18,000MHz~40,000MHz	H	4.01			

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MediaPad M2 8.0
Brand Name	HUAWEI
Model Name	M2-801w
Hardware Version	SH1M2803LM
Model Difference	N/A
PowerSource	#1 DC voltage supplied from AC adapter. Brand: HUAWEI Model: HW-050200U3W, HW-050200U01 S/N: HWHKA5E32707819 S/N: HWBYA32DC1600019 S/N: Y67401F3G00038 S/N: P67401F5W00017 S/N: B67432F1E00013 S/N: H67416F6100005 #2 Supplied from Li-ion Battery. Brand /Model: HUAWEI / HB3080G1EBW
Power Rating	#1 I/P: 100-240V~ 50/60Hz 0.5A O/P: DC 5.0V 2.0A #2 DC +3.7V 3000mAh

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT's maximum operating frequency is 5GHz

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Idle + 2.4G wifi + BT + GPS + earphone + Playing
Mode 2	Idle + 5G wifi + BT + GPS + earphone + Playing
Mode 3	Idle+5G wifi+BT+GPS+earphone+ camera on
Mode 4	Traffic + 2.4G wifi + BT + GPS + earphone + Playing
Mode 5	Traffic + 5G wifi + BT + GPS + earphone + camera on
Mode 6	Idle+5G wifi+BT+GPS+Speaker+Playing
Mode 7	Traffic + 2.4G wifi + BT + GPS + Speaker + camera on
Mode 8	USB R/W + Idle + 5G wifi + BT + GPS + earphone

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:


For Conducted Test	
Final Test Mode	Description
Mode 1	Idle + 2.4G wifi + BT + GPS + earphone + Playing
Mode 2	Idle + 5G wifi + BT + GPS + earphone + Playing
Mode 3	Idle+5G wifi+BT+GPS+earphone+ camera on
Mode 5	Traffic + 5G wifi + BT + GPS + earphone + camera on
Mode 6	Idle+5G wifi+BT+GPS+Speaker+Playing
Mode 8	USB R/W + Idle + 5G wifi + BT + GPS + earphone

For Radiated Test (30MHz to 1000MHz)	
Final Test Mode	Description
Mode 1	Idle + 2.4G wifi + BT + GPS + earphone + Playing
Mode 2	Idle + 5G wifi + BT + GPS + earphone + Playing
Mode 5	Traffic + 5G wifi + BT + GPS + earphone + camera on
Mode 6	Idle + 5G wifi + BT + GPS + Speaker + Playing
Mode 8	USB R/W + Idle + 5G wifi + BT + GPS + earphone

For Radiated Test (Above 1000MHz)	
Final Test Mode	Description
Mode 1	Idle + 2.4G wifi + BT + GPS + earphone + Playing
Mode 2	Idle + 5G wifi + BT + GPS + earphone + Playing
Mode 3	Traffic + 2.4G wifi + BT + GPS + earphone + camera on
Mode 7	Traffic + 2.4G wifi + BT + GPS + Speaker + camera on
Mode 8	USB R/W + Idle + 5G wifi + BT + GPS + earphone


3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 1~7

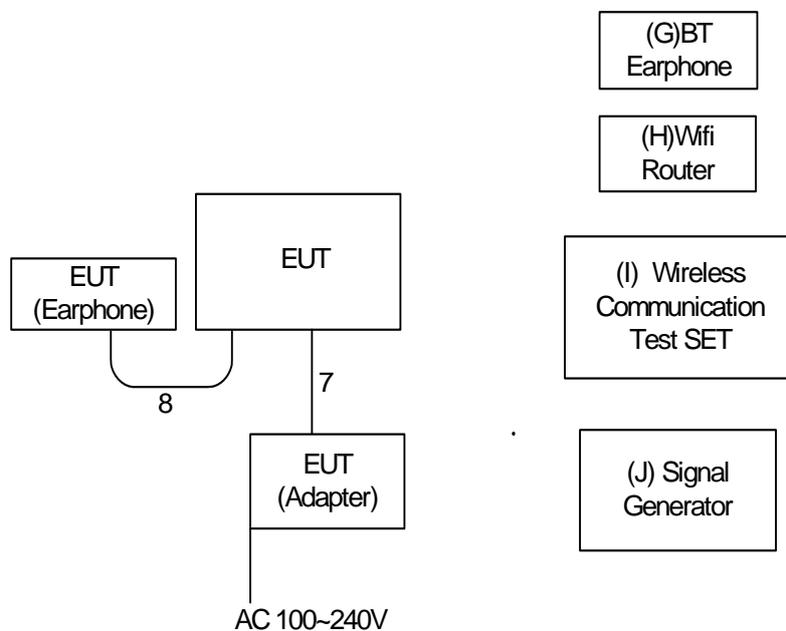

----- **Ground plane** -----
Remote System

Mode 8

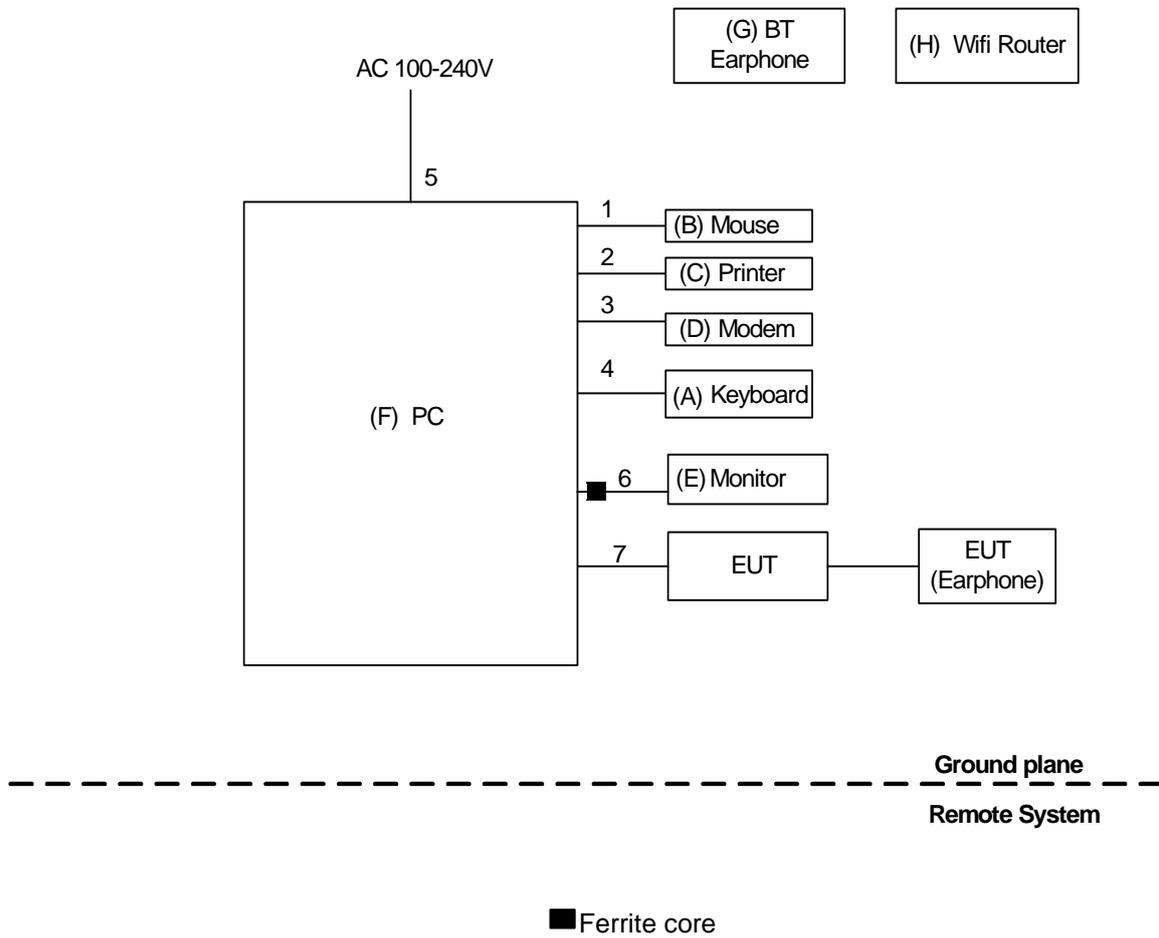

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
A	USB keyboard	hp	SK-2885	DOC	N/A	
B	USB Mouse	hp	SM-2020	DOC	N/A	
C	Printer	SII	DPU-414	DOC	3018507 B	
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131	
E	LCD monitor	DELL	E177FPc	DOC	CNOFJ179-64180-6A G-1WNS	
F	PC	DELL	7010 MT	DOC	7LRQ2W1	
G	BT Earphone	N/A	N/A	N/A	N/A	
H	Router	TP-LINK	TL-WR1041N	DOC	N/A	
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183	
J	SignalGenerator	Agilent	E4438C	N/A	MY49071316	

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC Cable
6	YES	YES	1.8M	D-SUB Cable
7	YES	NO	1M	USB Cable
8	NO	NO	1.1m	Audio Cable

Note:

- (1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100087	Dec. 07, 2015
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
4	Measurement Software	EZ	EZ_EMCC (Version NB-03A)	N/A	N/A

Remark: " N/A" denotes no model name, serial No. or no calibration specified.


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

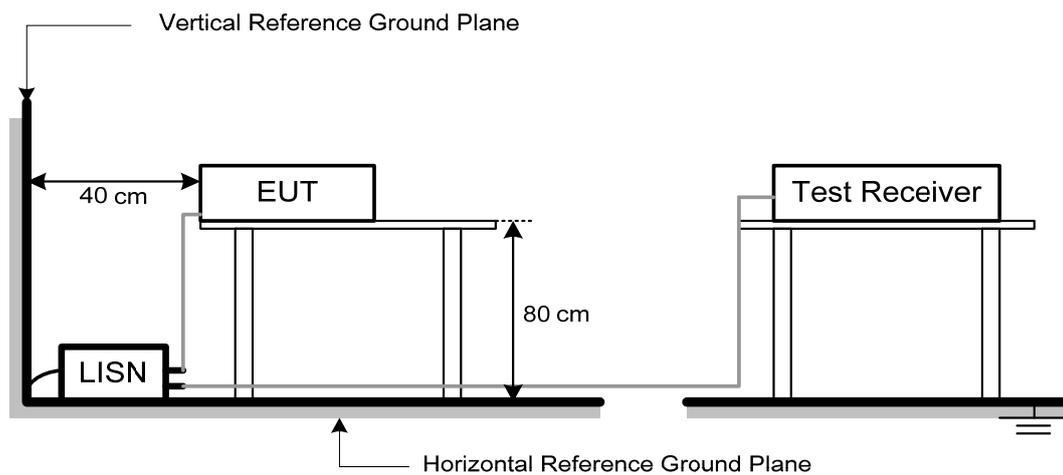

4.1.6 EUT OPERATING CONDITIONS


The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.7 TEST RESULTS

Remark:


- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz,VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 2.4G wifi + BT+ GPS+ earphone + Playing – Adapter: BYD(HWBYA32DC1600019)	Phase:	Line

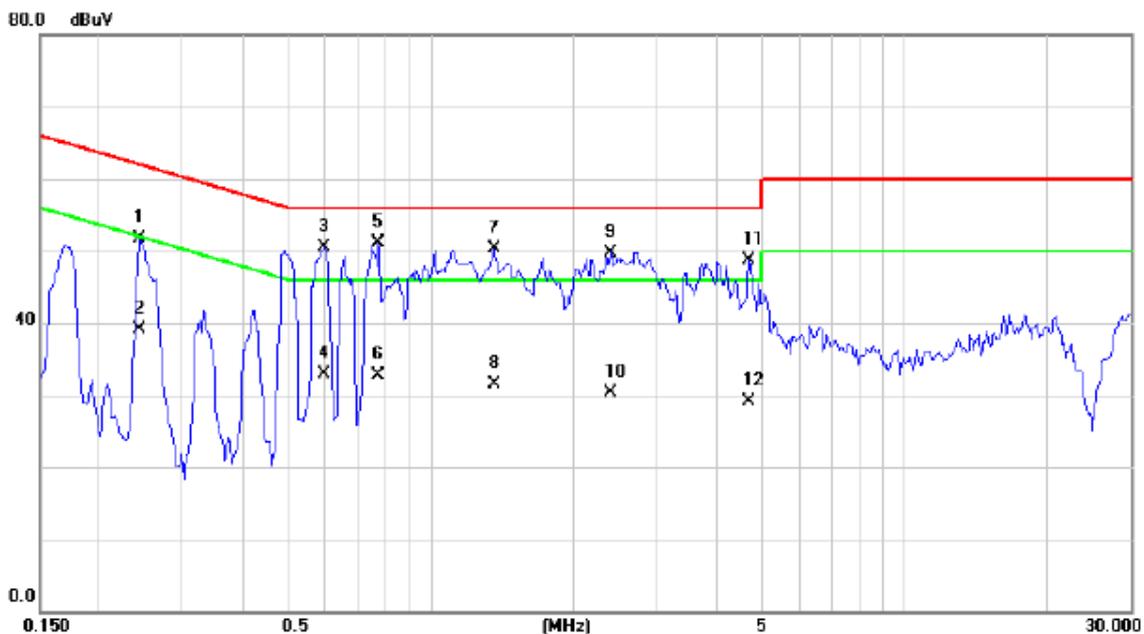


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2437	41.97	9.67	51.64	61.97	-10.33	QP	
2	0.2437	29.50	9.67	39.17	51.97	-12.80	AVG	
3	0.5992	40.80	9.77	50.57	56.00	-5.43	QP	
4	0.5992	23.10	9.77	32.87	46.00	-13.13	AVG	
5 *	0.7790	41.20	9.81	51.01	56.00	-4.99	QP	
6	0.7790	22.90	9.81	32.71	46.00	-13.29	AVG	
7	1.3610	40.45	9.80	50.25	56.00	-5.75	QP	
8	1.3610	21.70	9.80	31.50	46.00	-14.50	AVG	
9	2.4000	40.06	9.73	49.79	56.00	-6.21	QP	
10	2.4000	20.50	9.73	30.23	46.00	-15.77	AVG	
11	4.7148	39.78	8.87	48.65	56.00	-7.35	QP	
12	4.7148	20.30	8.87	29.17	46.00	-16.83	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 2.4G wifi + BT + GPS + earphone + Playing – Adapter: BYD(HWBYA32DC1600019)	Phase:	Neutral

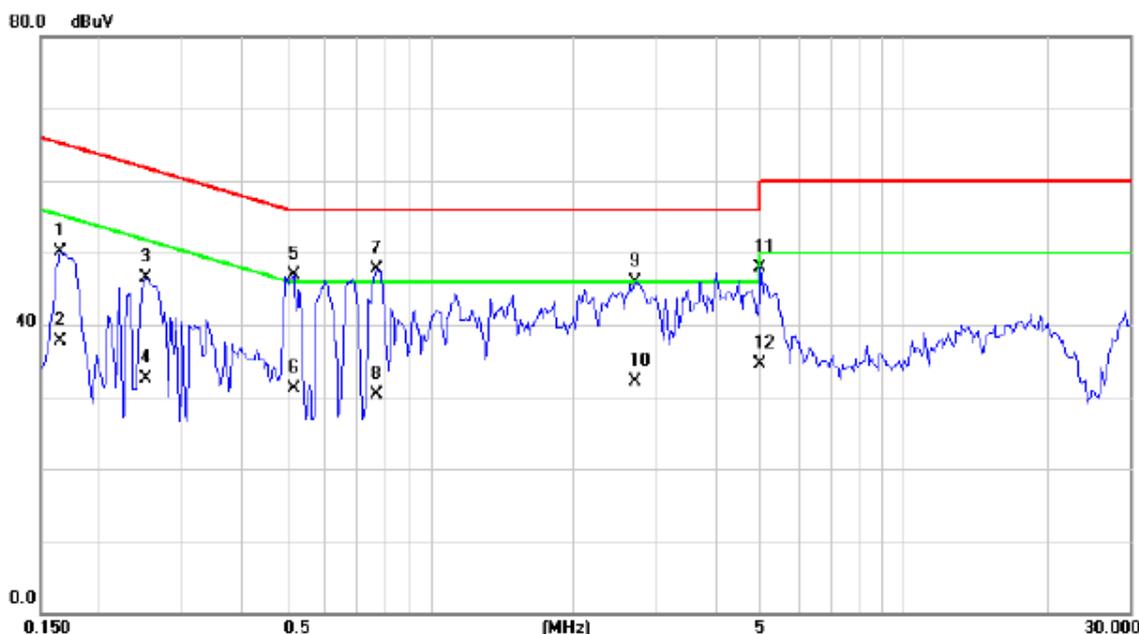


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1655	40.63	9.54	50.17	65.18	-15.01	QP	
2	0.1655	28.10	9.54	37.64	55.18	-17.54	AVG	
3	0.2516	36.85	9.56	46.41	61.70	-15.29	QP	
4	0.2516	22.90	9.56	32.46	51.70	-19.24	AVG	
5	0.5132	37.31	9.58	46.89	56.00	-9.11	QP	
6	0.5132	21.50	9.58	31.08	46.00	-14.92	AVG	
7	0.7711	38.04	9.60	47.64	56.00	-8.36	QP	
8	0.7711	20.80	9.60	30.40	46.00	-15.60	AVG	
9	2.7125	36.20	9.62	45.82	56.00	-10.18	QP	
10	2.7125	22.50	9.62	32.12	46.00	-13.88	AVG	
11 *	4.9805	38.14	9.75	47.89	56.00	-8.11	QP	
12	4.9805	24.80	9.75	34.55	46.00	-11.45	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: BYD(HWBYA32DC1600019)	Phase:	Line

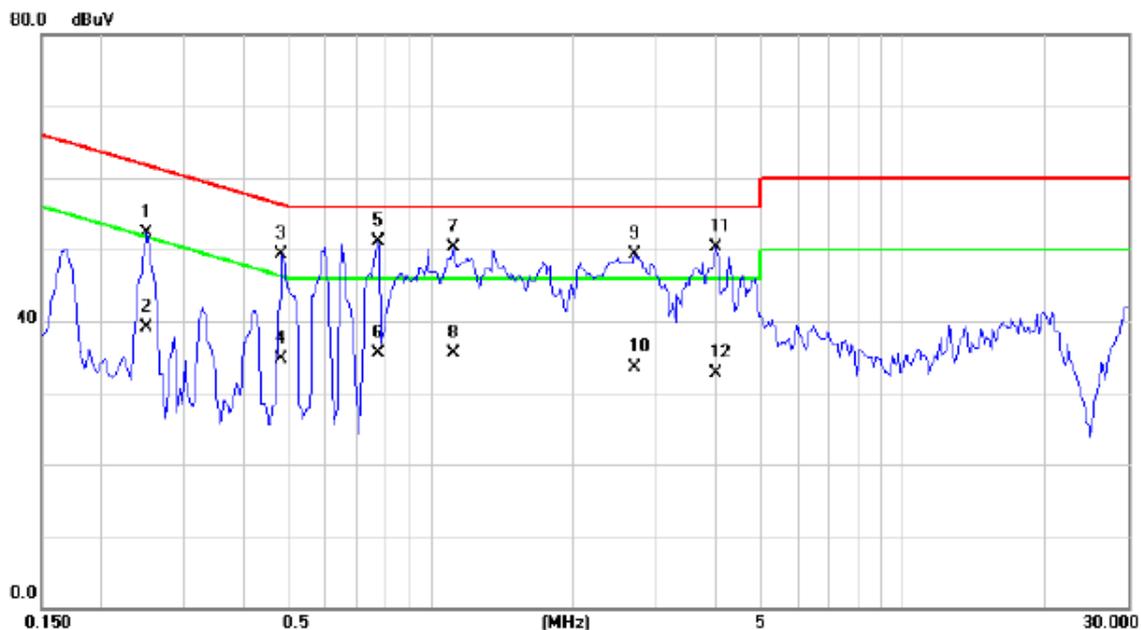


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2516	42.56	9.67	52.23	61.70	-9.47	QP	
2	0.2516	29.50	9.67	39.17	51.70	-12.53	AVG	
3	0.4860	39.47	9.75	49.22	56.24	-7.02	QP	
4	0.4860	24.90	9.75	34.65	46.24	-11.59	AVG	
5 *	0.7790	41.37	9.81	51.18	56.00	-4.82	QP	
6	0.7790	25.70	9.81	35.51	46.00	-10.49	AVG	
7	1.1227	40.47	9.84	50.31	56.00	-5.69	QP	
8	1.1227	25.70	9.84	35.54	46.00	-10.46	AVG	
9	2.7125	39.62	9.67	49.29	56.00	-6.71	QP	
10	2.7125	23.80	9.67	33.47	46.00	-12.53	AVG	
11	4.0156	40.68	9.56	50.24	56.00	-5.76	QP	
12	4.0156	23.10	9.56	32.66	46.00	-13.34	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: BYD(HWBYA32DC1600019)	Phase:	Neutral

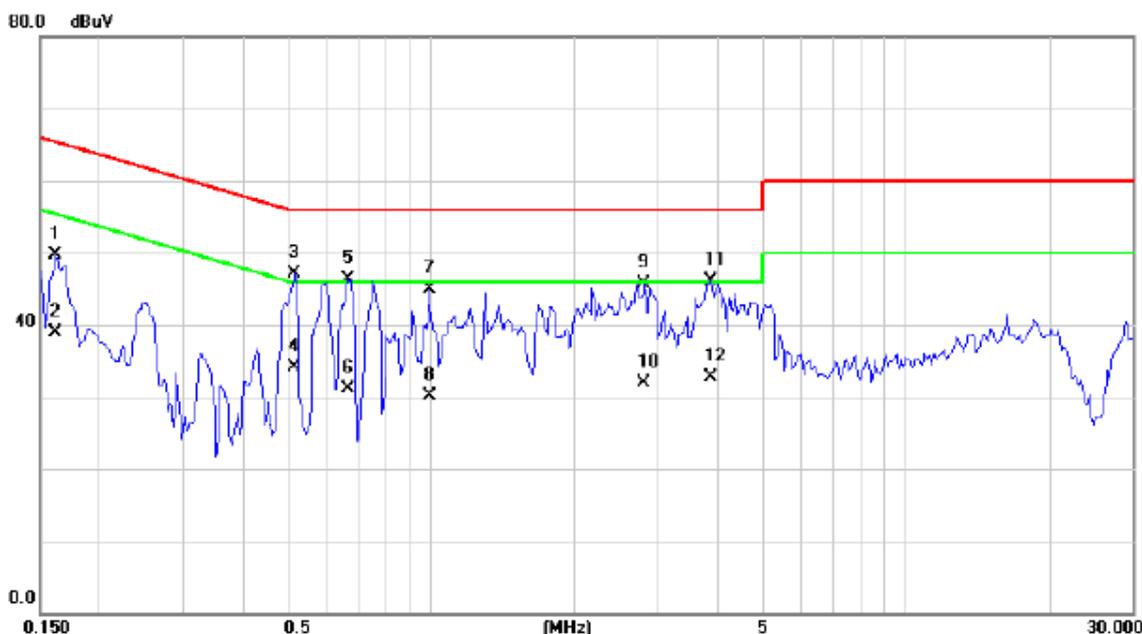


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1617	40.12	9.54	49.66	65.38	-15.72	QP	
2		0.1617	29.40	9.54	38.94	55.38	-16.44	AVG	
3	*	0.5172	37.49	9.58	47.07	56.00	-8.93	QP	
4		0.5172	24.60	9.58	34.18	46.00	-11.82	AVG	
5		0.6695	36.63	9.59	46.22	56.00	-9.78	QP	
6		0.6695	21.60	9.59	31.19	46.00	-14.81	AVG	
7		0.9898	35.28	9.63	44.91	56.00	-11.09	QP	
8		0.9898	20.50	9.63	30.13	46.00	-15.87	AVG	
9		2.8102	36.18	9.60	45.78	56.00	-10.22	QP	
10		2.8102	22.30	9.60	31.90	46.00	-14.10	AVG	
11		3.8828	36.35	9.67	46.02	56.00	-9.98	QP	
12		3.8828	23.10	9.67	32.77	46.00	-13.23	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + camera on – Adapter: BYD(HWBYA32DC1600019)	Phase:	Line

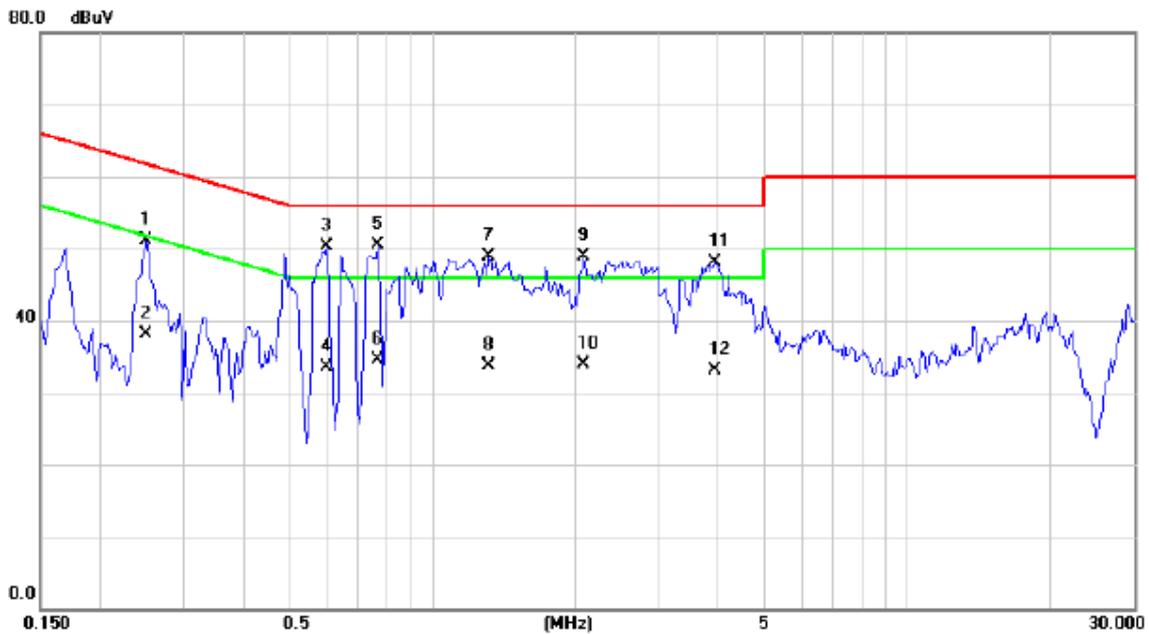


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2516	41.42	9.67	51.09	61.70	-10.61	QP	
2	0.2516	28.50	9.67	38.17	51.70	-13.53	AVG	
3	0.6031	40.49	9.77	50.26	56.00	-5.74	QP	
4	0.6031	23.70	9.77	33.47	46.00	-12.53	AVG	
5 *	0.7671	40.60	9.81	50.41	56.00	-5.59	QP	
6	0.7672	24.60	9.81	34.41	46.00	-11.59	AVG	
7	1.3180	39.03	9.82	48.85	56.00	-7.15	QP	
8	1.3180	23.80	9.82	33.62	46.00	-12.38	AVG	
9	2.0913	39.16	9.69	48.85	56.00	-7.15	QP	
10	2.0913	24.20	9.69	33.89	46.00	-12.11	AVG	
11	3.9414	38.52	9.58	48.10	56.00	-7.90	QP	
12	3.9414	23.50	9.58	33.08	46.00	-12.92	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + camera on – Adapter: BYD(HWBYA32DC1600019)	Phase:	Neutral

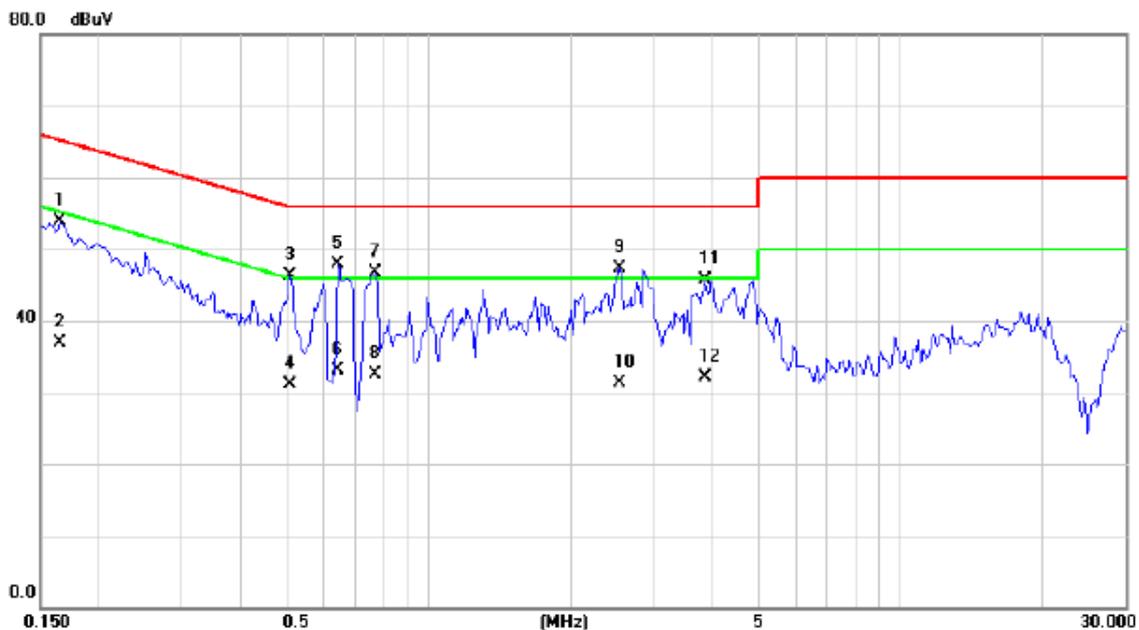


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1655	44.31	9.54	53.85	65.18	-11.33	QP	
2	0.1655	27.40	9.54	36.94	55.18	-18.24	AVG	
3	0.5094	36.78	9.58	46.36	56.00	-9.64	QP	
4	0.5094	21.50	9.58	31.08	46.00	-14.92	AVG	
5 *	0.6422	38.38	9.59	47.97	56.00	-8.03	QP	
6	0.6422	23.50	9.59	33.09	46.00	-12.91	AVG	
7	0.7750	37.19	9.61	46.80	56.00	-9.20	QP	
8	0.7750	22.90	9.61	32.51	46.00	-13.49	AVG	
9	2.5406	37.71	9.65	47.36	56.00	-8.64	QP	
10	2.5406	21.70	9.65	31.35	46.00	-14.65	AVG	
11	3.8555	36.13	9.66	45.79	56.00	-10.21	QP	
12	3.8555	22.50	9.66	32.16	46.00	-13.84	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + camera on – Adapter: BYD(HWBYA32DC1600019)	Phase:	Line

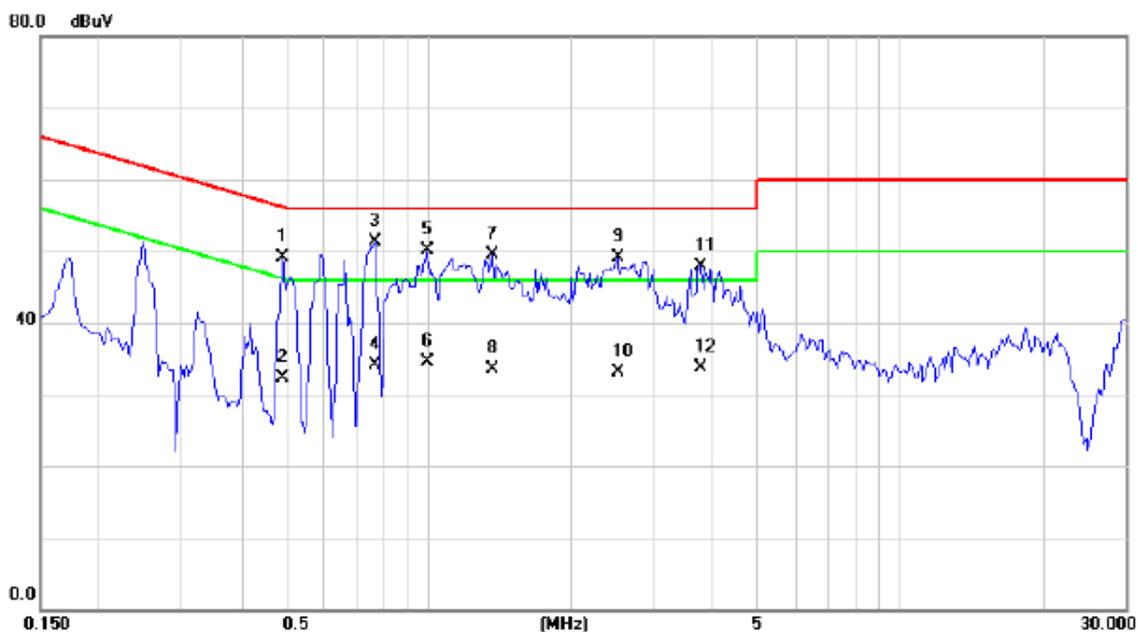


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4898	39.29	9.75	49.04	56.17	-7.13	QP	
2	0.4898	22.50	9.75	32.25	46.17	-13.92	AVG	
3 *	0.7672	41.52	9.81	51.33	56.00	-4.67	QP	
4	0.7672	24.30	9.81	34.11	46.00	-11.89	AVG	
5	0.9898	40.32	9.82	50.14	56.00	-5.86	QP	
6	0.9898	24.70	9.82	34.52	46.00	-11.48	AVG	
7	1.3648	39.78	9.80	49.58	56.00	-6.42	QP	
8	1.3648	23.70	9.80	33.50	46.00	-12.50	AVG	
9	2.5133	39.41	9.74	49.15	56.00	-6.85	QP	
10	2.5133	23.40	9.74	33.14	46.00	-12.86	AVG	
11	3.7695	38.23	9.58	47.81	56.00	-8.19	QP	
12	3.7695	24.10	9.58	33.68	46.00	-12.32	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + camera on – Adapter: BYD(HWBYA32DC1600019)	Phase:	Neutral

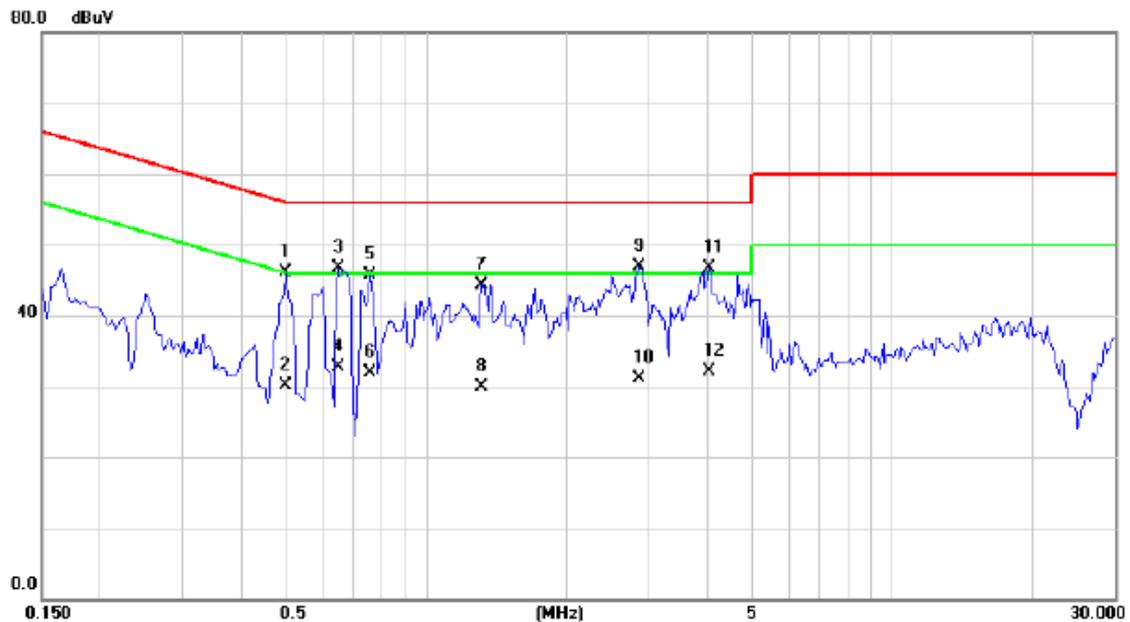


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.5016	36.52	9.58	46.10	56.00	-9.90	QP	
2		0.5016	20.50	9.58	30.08	46.00	-15.92	AVG	
3		0.6500	37.08	9.59	46.67	56.00	-9.33	QP	
4		0.6500	23.10	9.59	32.69	46.00	-13.31	AVG	
5		0.7594	36.19	9.60	45.79	56.00	-10.21	QP	
6		0.7594	22.40	9.60	32.00	46.00	-14.00	AVG	
7		1.3220	34.75	9.64	44.39	56.00	-11.61	QP	
8		1.3220	20.30	9.64	29.94	46.00	-16.06	AVG	
9	*	2.8727	37.25	9.59	46.84	56.00	-9.16	QP	
10		2.8727	21.60	9.59	31.19	46.00	-14.81	AVG	
11		4.0547	37.08	9.68	46.76	56.00	-9.24	QP	
12		4.0547	22.50	9.68	32.18	46.00	-13.82	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + Speaker + Playing – Adapter: BYD(HWBYA32DC1600019)	Phase:	Line

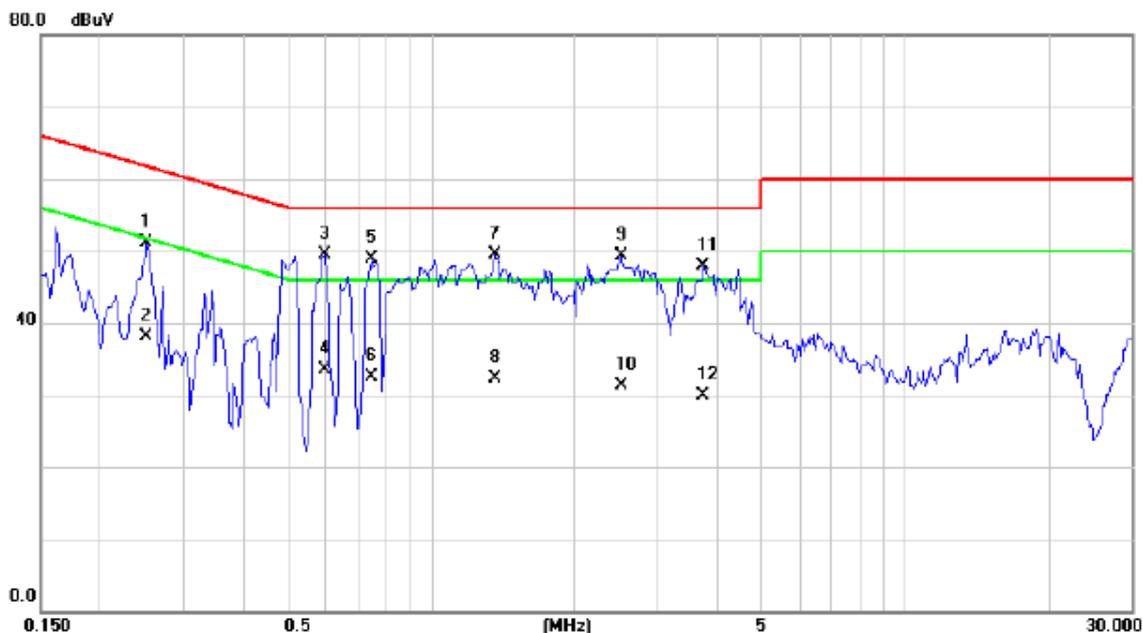


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2516	41.38	9.67	51.05	61.70	-10.65	QP	
2	0.2516	28.50	9.67	38.17	51.70	-13.53	AVG	
3	0.5953	39.71	9.77	49.48	56.00	-6.52	QP	
4	0.5953	23.70	9.77	33.47	46.00	-12.53	AVG	
5	0.7477	39.10	9.80	48.90	56.00	-7.10	QP	
6	0.7477	22.80	9.80	32.60	46.00	-13.40	AVG	
7 *	1.3648	39.69	9.80	49.49	56.00	-6.51	QP	
8	1.3648	22.60	9.80	32.40	46.00	-13.60	AVG	
9	2.5172	39.64	9.73	49.37	56.00	-6.63	QP	
10	2.5172	21.50	9.73	31.23	46.00	-14.77	AVG	
11	3.7540	38.27	9.58	47.85	56.00	-8.15	QP	
12	3.7540	20.30	9.58	29.88	46.00	-16.12	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + Speaker + Playing – Adapter: BYD(HWBYA32DC1600019)	Phase:	Neutral

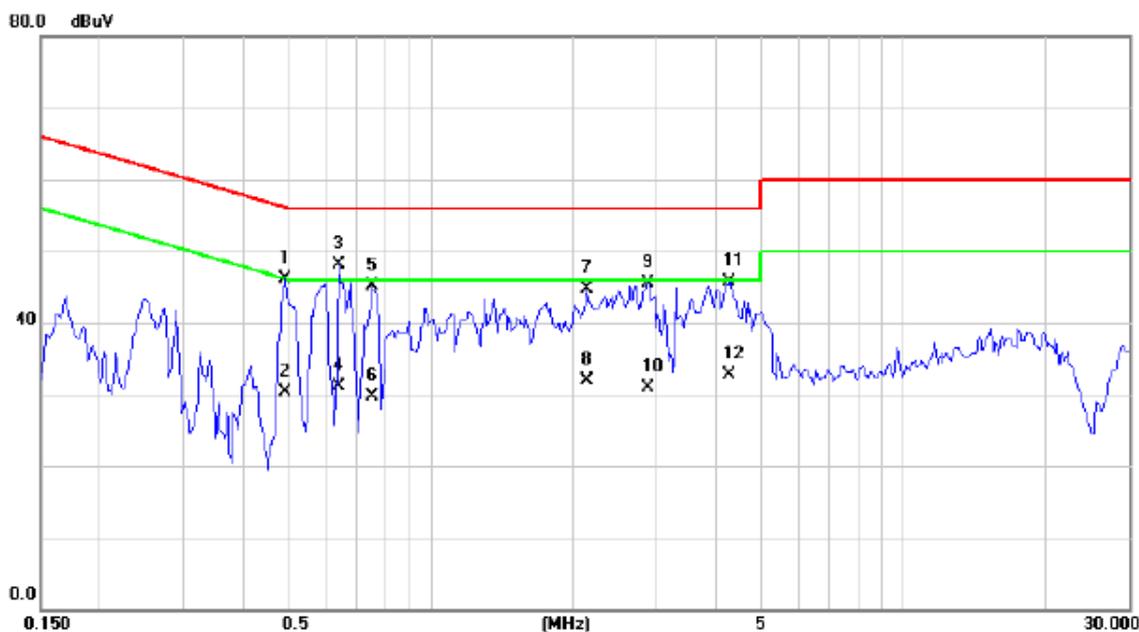


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4938	36.55	9.58	46.13	56.10	-9.97	QP	
2	0.4938	20.70	9.58	30.28	46.10	-15.82	AVG	
3 *	0.6422	38.44	9.59	48.03	56.00	-7.97	QP	
4	0.6422	21.50	9.59	31.09	46.00	-14.91	AVG	
5	0.7516	35.42	9.60	45.02	56.00	-10.98	QP	
6	0.7516	20.10	9.60	29.70	46.00	-16.30	AVG	
7	2.1461	35.03	9.72	44.75	56.00	-11.25	QP	
8	2.1461	22.20	9.72	31.92	46.00	-14.08	AVG	
9	2.8961	35.97	9.58	45.55	56.00	-10.45	QP	
10	2.8961	21.30	9.58	30.88	46.00	-15.12	AVG	
11	4.3125	36.10	9.70	45.80	56.00	-10.20	QP	
12	4.3125	23.10	9.70	32.80	46.00	-13.20	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + camera on -Adapter: HK(HWHKA5E32707819)	Phase:	Line

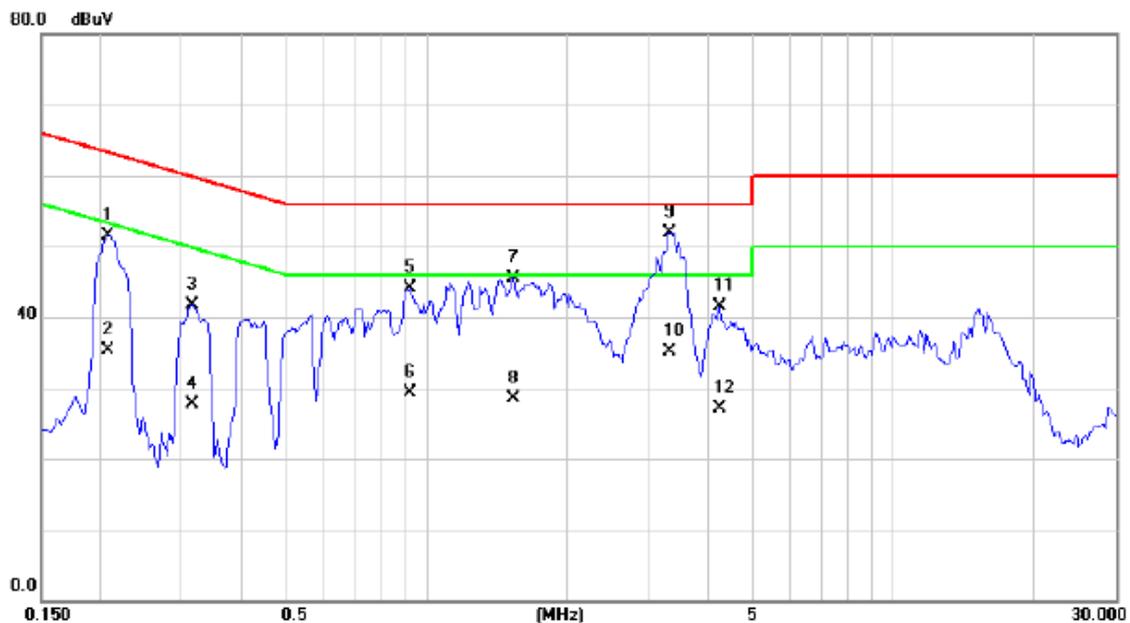


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2086	41.83	9.65	51.48	63.26	-11.78	QP	
2		0.2086	25.70	9.65	35.35	53.26	-17.91	AVG	
3		0.3180	32.04	9.71	41.75	59.76	-18.01	QP	
4		0.3180	17.90	9.71	27.61	49.76	-22.15	AVG	
5		0.9273	34.32	9.81	44.13	56.00	-11.87	QP	
6		0.9273	19.50	9.81	29.31	46.00	-16.69	AVG	
7		1.5367	35.78	9.74	45.52	56.00	-10.48	QP	
8		1.5367	18.70	9.74	28.44	46.00	-17.56	AVG	
9	*	3.3047	42.34	9.58	51.92	56.00	-4.08	QP	
10		3.3047	25.50	9.58	35.08	46.00	-10.92	AVG	
11		4.2578	32.13	9.32	41.45	56.00	-14.55	QP	
12		4.2578	17.80	9.32	27.12	46.00	-18.88	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + camera on -Adapter: HK(HWHKA5E32707819)	Phase:	Neutral

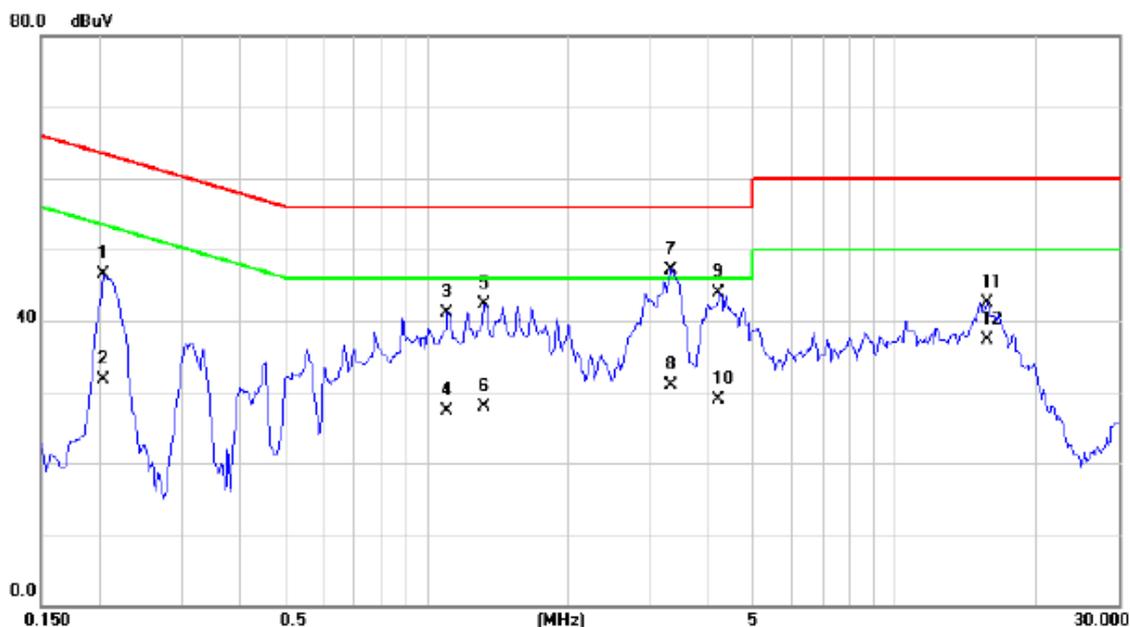


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2047	36.89	9.55	46.44	63.42	-16.98	QP	
2		0.2047	22.10	9.55	31.65	53.42	-21.77	AVG	
3		1.1110	31.51	9.64	41.15	56.00	-14.85	QP	
4		1.1110	17.60	9.64	27.24	46.00	-18.76	AVG	
5		1.3297	32.59	9.64	42.23	56.00	-13.77	QP	
6		1.3297	18.30	9.64	27.94	46.00	-18.06	AVG	
7	*	3.3438	37.58	9.60	47.18	56.00	-8.82	QP	
8		3.3438	21.40	9.60	31.00	46.00	-15.00	AVG	
9		4.2188	34.25	9.70	43.95	56.00	-12.05	QP	
10		4.2188	19.30	9.70	29.00	46.00	-17.00	AVG	
11		15.7578	32.90	9.64	42.54	60.00	-17.46	QP	
12		15.7578	27.60	9.64	37.24	50.00	-12.76	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	USB R/W + Idle + 5G wifi + BT + GPS + earphone	Phase:	Line

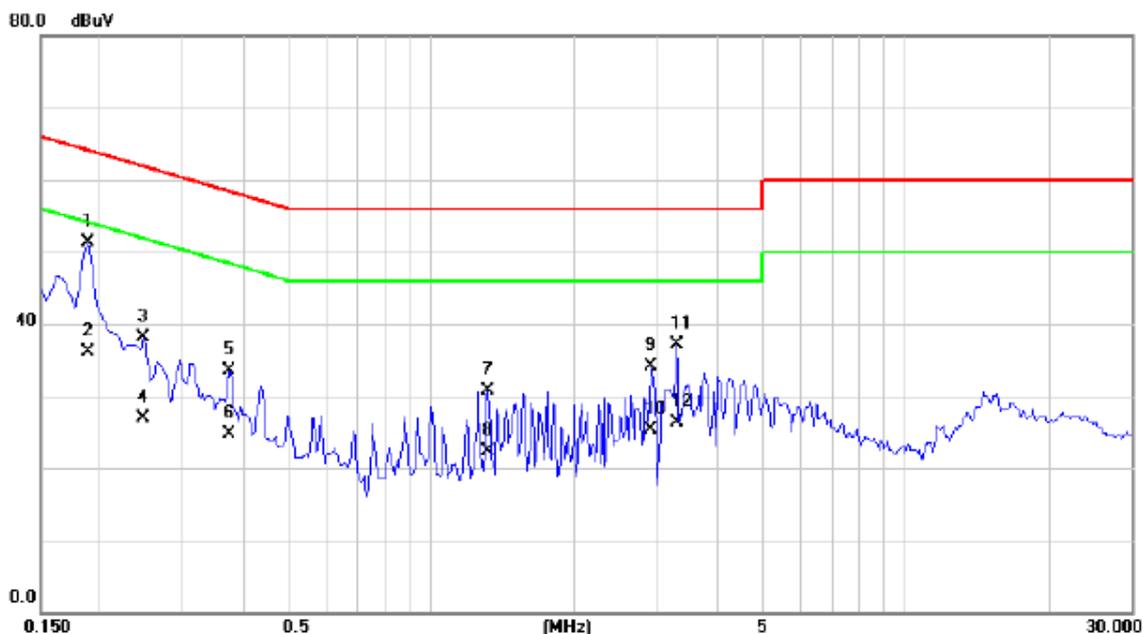


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1891	41.63	9.64	51.27	64.08	-12.81	QP	
2		0.1891	26.50	9.64	36.14	54.08	-17.94	AVG	
3		0.2477	28.52	9.67	38.19	61.83	-23.64	QP	
4		0.2477	17.30	9.67	26.97	51.83	-24.86	AVG	
5		0.3766	23.75	9.73	33.48	58.35	-24.87	QP	
6		0.3766	14.90	9.73	24.63	48.35	-23.72	AVG	
7		1.3180	20.92	9.82	30.74	56.00	-25.26	QP	
8		1.3180	12.40	9.82	22.22	46.00	-23.78	AVG	
9		2.9038	24.41	9.61	34.02	56.00	-21.98	QP	
10		2.9038	15.60	9.61	25.21	46.00	-20.79	AVG	
11		3.2970	27.58	9.58	37.16	56.00	-18.84	QP	
12		3.2970	16.80	9.58	26.38	46.00	-19.62	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	USB R/W + Idle + 5G wifi + BT + GPS + earphone	Phase:	Neutral

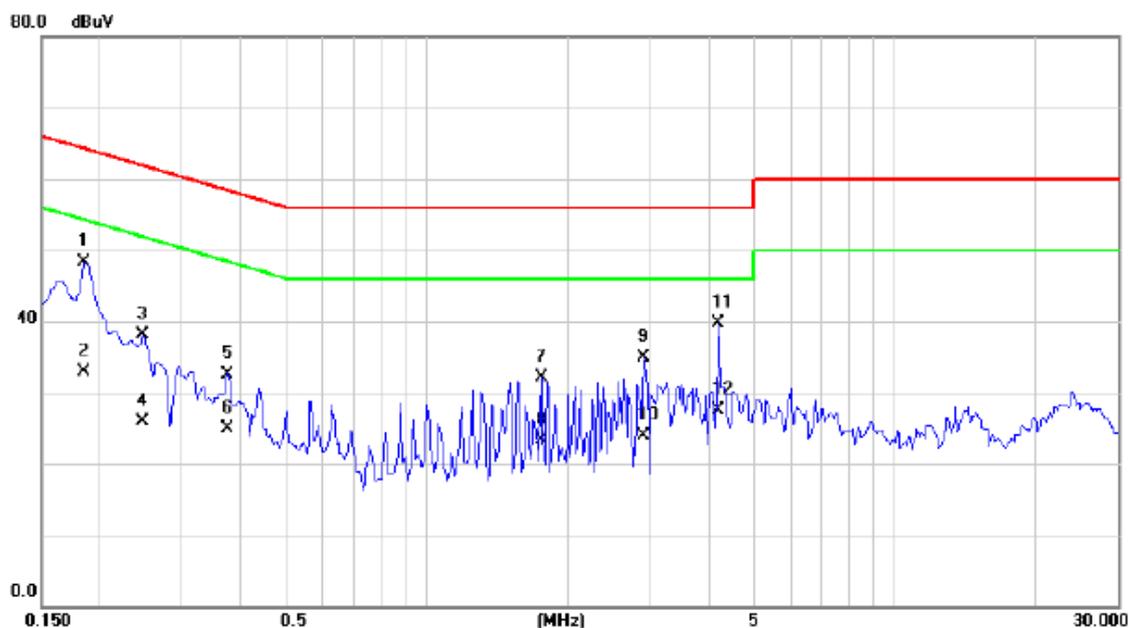

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1852	38.66	9.55	48.21	64.25	-16.04	QP	
2		0.1852	23.40	9.55	32.95	54.25	-21.30	AVG	
3		0.2477	28.48	9.56	38.04	61.83	-23.79	QP	
4		0.2477	16.30	9.56	25.86	51.83	-25.97	AVG	
5		0.3766	23.04	9.56	32.60	58.35	-25.75	QP	
6		0.3766	15.40	9.56	24.96	48.35	-23.39	AVG	
7		1.7555	22.39	9.70	32.09	56.00	-23.91	QP	
8		1.7555	13.70	9.70	23.40	46.00	-22.60	AVG	
9		2.9000	25.40	9.58	34.98	56.00	-21.02	QP	
10		2.9000	14.30	9.58	23.88	46.00	-22.12	AVG	
11		4.2031	30.00	9.69	39.69	56.00	-16.31	QP	
12		4.2031	17.90	9.69	27.59	46.00	-18.41	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + camera on -Adapter: BYD(B67432F1E00013)	Phase:	Line

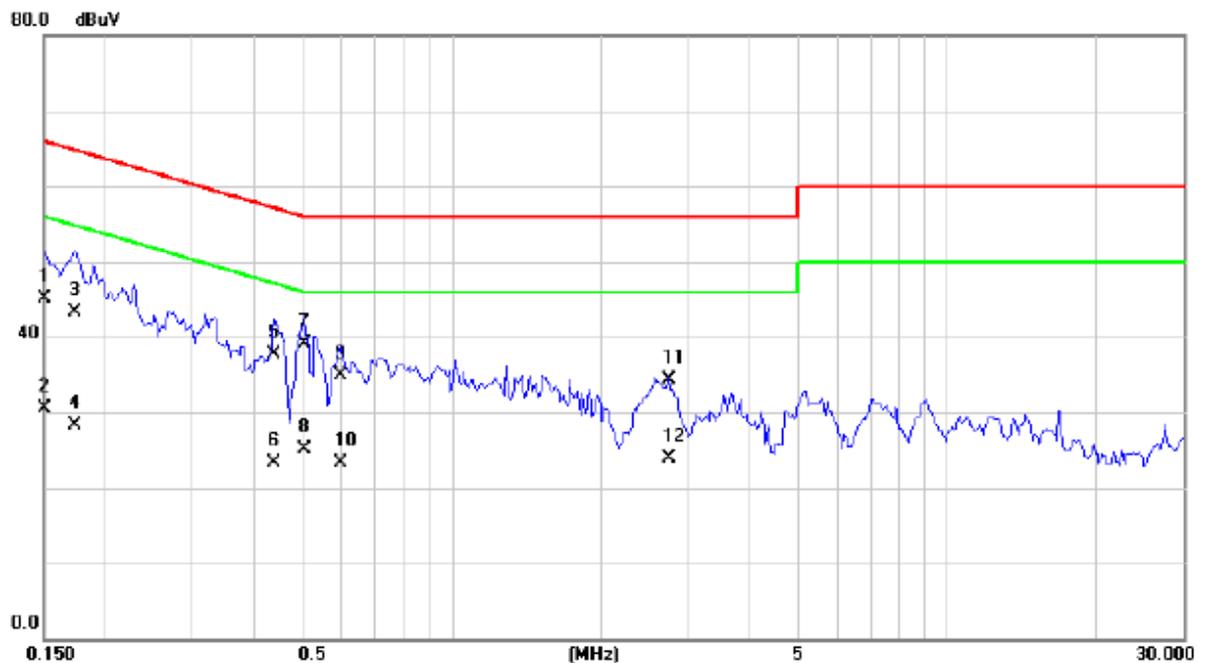


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	35.50	9.54	45.04	66.00	-20.96	QP	
2		0.1500	20.90	9.54	30.44	56.00	-25.56	AVG	
3		0.1734	33.70	9.56	43.26	64.80	-21.54	QP	
4		0.1734	18.80	9.56	28.36	54.80	-26.44	AVG	
5		0.4391	28.10	9.68	37.78	57.08	-19.30	QP	
6		0.4391	13.70	9.68	23.38	47.08	-23.70	AVG	
7	*	0.5055	29.50	9.68	39.18	56.00	-16.82	QP	
8		0.5055	15.50	9.68	25.18	46.00	-20.82	AVG	
9		0.5953	25.10	9.72	34.82	56.00	-21.18	QP	
10		0.5953	13.50	9.72	23.22	46.00	-22.78	AVG	
11		2.7437	24.30	10.01	34.31	56.00	-21.69	QP	
12		2.7437	13.80	10.01	23.81	46.00	-22.19	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + camera on -Adapter: BYD(B67432F1E00013)	Phase:	Neutral




No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	31.40	9.49	40.89	66.00	-25.11	QP	
2	0.1500	17.80	9.49	27.29	56.00	-28.71	AVG	
3	0.4430	26.00	9.54	35.54	57.01	-21.47	QP	
4	0.4430	19.10	9.54	28.64	47.01	-18.37	AVG	
5	0.4977	30.20	9.56	39.76	56.04	-16.28	QP	
6 *	0.4977	21.60	9.56	31.16	46.04	-14.88	AVG	
7	0.9781	25.00	9.58	34.58	56.00	-21.42	QP	
8	0.9781	16.10	9.58	25.68	46.00	-20.32	AVG	
9	2.5953	25.10	9.78	34.88	56.00	-21.12	QP	
10	2.5953	15.80	9.78	25.58	46.00	-20.42	AVG	
11	4.0038	24.60	9.92	34.52	56.00	-21.48	QP	
12	4.0038	13.20	9.92	23.12	46.00	-22.88	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + camera on -Adapter: HK(H67416F6100005)	Phase:	Line

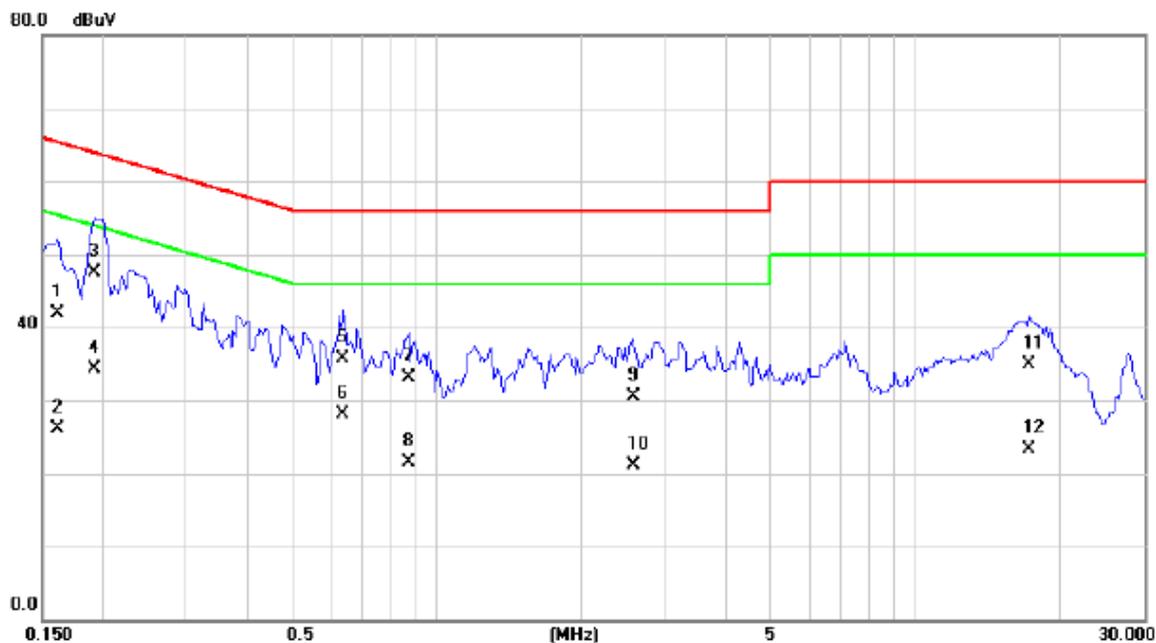

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1617	32.30	9.55	41.85	65.38	-23.53	QP	
2		0.1617	16.50	9.55	26.05	55.38	-29.33	AVG	
3	*	0.1930	38.00	9.57	47.57	63.91	-16.34	QP	
4		0.1930	24.80	9.57	34.37	53.91	-19.54	AVG	
5		0.6382	26.00	9.73	35.73	56.00	-20.27	QP	
6		0.6382	18.40	9.73	28.13	46.00	-17.87	AVG	
7		0.8727	23.40	9.77	33.17	56.00	-22.83	QP	
8		0.8727	11.80	9.77	21.57	46.00	-24.43	AVG	
9		2.5720	20.60	10.00	30.60	56.00	-25.40	QP	
10		2.5720	11.20	10.00	21.20	46.00	-24.80	AVG	
11		17.2110	25.00	9.84	34.84	60.00	-25.16	QP	
12		17.2110	13.50	9.84	23.34	50.00	-26.66	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + camera on -Adapter: HK(H67416F6100005)	Phase:	Neutral

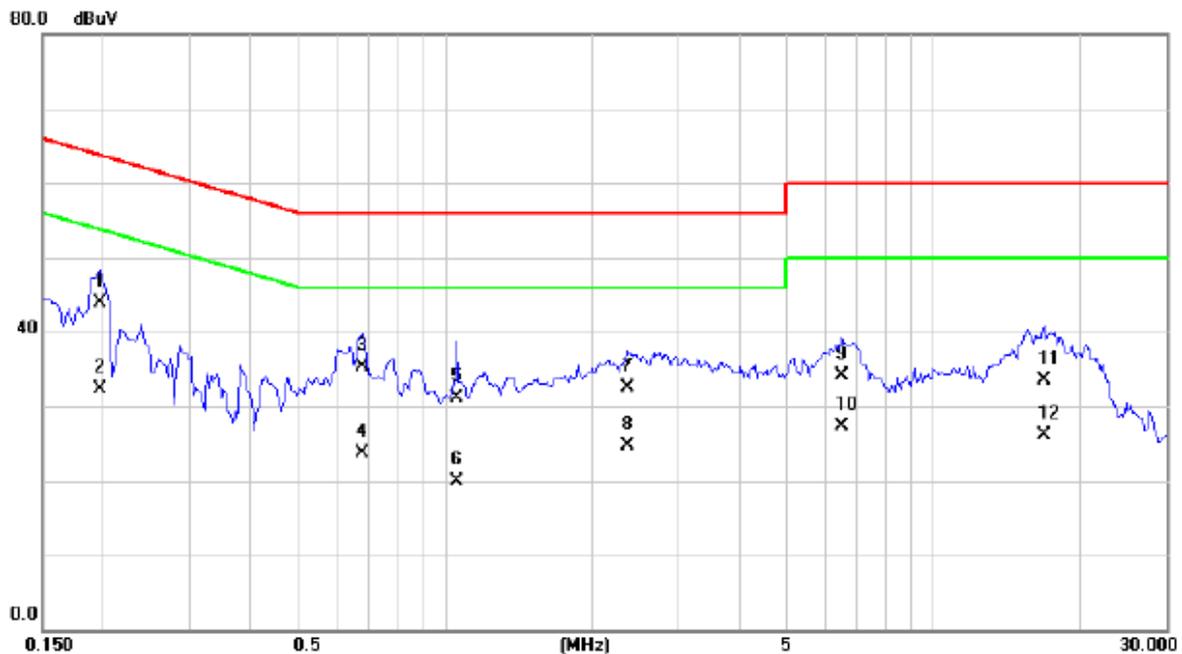


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1970	34.40	9.50	43.90	63.74	-19.84	QP	
2		0.1970	22.90	9.50	32.40	53.74	-21.34	AVG	
3		0.6813	25.70	9.53	35.23	56.00	-20.77	QP	
4		0.6813	14.10	9.53	23.63	46.00	-22.37	AVG	
5		1.0602	21.60	9.59	31.19	56.00	-24.81	QP	
6		1.0602	10.40	9.59	19.99	46.00	-26.01	AVG	
7		2.3687	22.80	9.75	32.55	56.00	-23.45	QP	
8		2.3687	14.90	9.75	24.65	46.00	-21.35	AVG	
9		6.5078	24.30	9.86	34.16	60.00	-25.84	QP	
10		6.5078	17.40	9.86	27.26	50.00	-22.74	AVG	
11		16.8438	23.50	9.93	33.43	60.00	-26.57	QP	
12		16.8438	16.20	9.93	26.13	50.00	-23.87	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + camera on -Adapter: PHITEK(P67401F5W00017)	Phase:	Line




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2047	35.80	9.57	45.37	63.42	-18.05	QP	
2		0.2047	17.30	9.57	26.87	53.42	-26.55	AVG	
3		0.2360	31.20	9.60	40.80	62.24	-21.44	QP	
4		0.2360	13.30	9.60	22.90	52.24	-29.34	AVG	
5	*	1.6695	29.80	9.86	39.66	56.00	-16.34	QP	
6		1.6695	15.10	9.86	24.96	46.00	-21.04	AVG	
7		1.9508	28.30	9.91	38.21	56.00	-17.79	QP	
8		1.9508	14.20	9.91	24.11	46.00	-21.89	AVG	
9		5.0273	27.90	9.99	37.89	60.00	-22.11	QP	
10		5.0273	14.80	9.99	24.79	50.00	-25.21	AVG	
11		7.7148	27.10	9.91	37.01	60.00	-22.99	QP	
12		7.7148	14.10	9.91	24.01	50.00	-25.99	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + camera on -Adapter: PHITEK(P67401F5W00017)	Phase:	Neutral

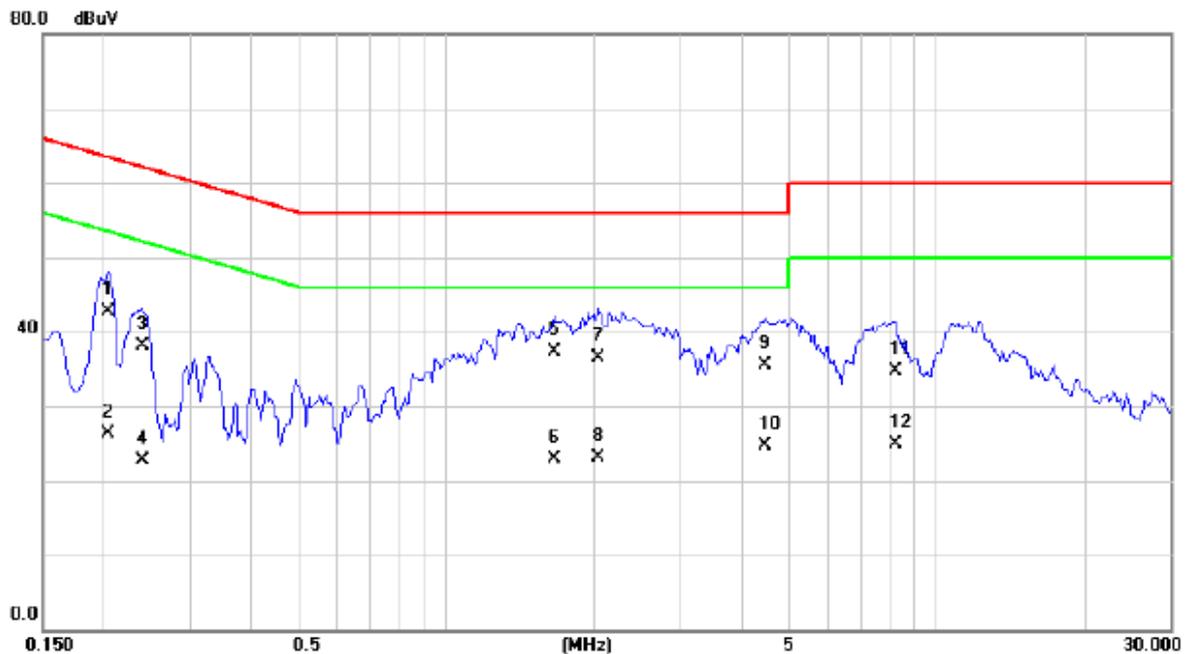


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2047	33.30	9.50	42.80	63.42	-20.62	QP	
2		0.2047	16.80	9.50	26.30	53.42	-27.12	AVG	
3		0.2398	28.50	9.51	38.01	62.10	-24.09	QP	
4		0.2398	13.20	9.51	22.71	52.10	-29.39	AVG	
5	*	1.6656	27.70	9.68	37.38	56.00	-18.62	QP	
6		1.6656	13.20	9.68	22.88	46.00	-23.12	AVG	
7		2.0445	26.70	9.72	36.42	56.00	-19.58	QP	
8		2.0445	13.30	9.72	23.02	46.00	-22.98	AVG	
9		4.4766	25.60	9.91	35.51	56.00	-20.49	QP	
10		4.4766	14.80	9.91	24.71	46.00	-21.29	AVG	
11		8.2852	24.90	9.85	34.75	60.00	-25.25	QP	
12		8.2852	15.00	9.85	24.85	50.00	-25.15	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + camera on -Adapter: YINYJU (Y67401F3G00038)	Phase:	Line

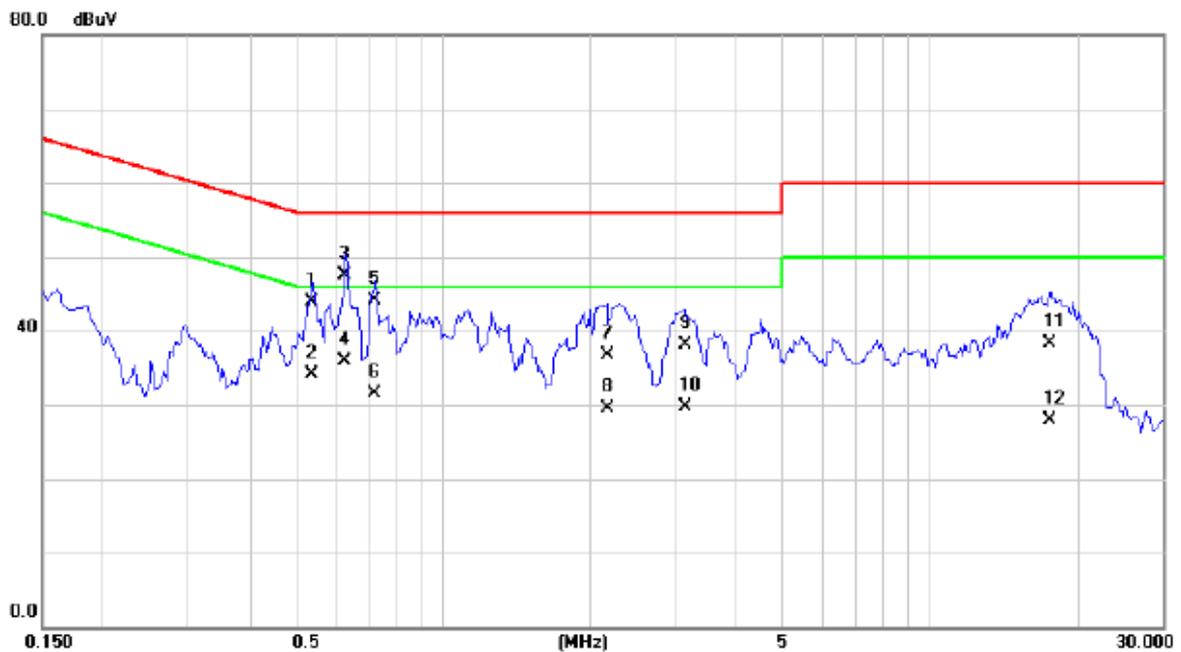

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5406	34.30	9.70	44.00	56.00	-12.00	QP	
2		0.5406	24.50	9.70	34.20	46.00	-11.80	AVG	
3	*	0.6305	37.80	9.73	47.53	56.00	-8.47	QP	
4		0.6305	26.10	9.73	35.83	46.00	-10.17	AVG	
5		0.7242	34.40	9.74	44.14	56.00	-11.86	QP	
6		0.7242	21.80	9.74	31.54	46.00	-14.46	AVG	
7		2.1695	26.80	9.94	36.74	56.00	-19.26	QP	
8		2.1695	19.50	9.94	29.44	46.00	-16.56	AVG	
9		3.1563	28.00	10.03	38.03	56.00	-17.97	QP	
10		3.1563	19.60	10.03	29.63	46.00	-16.37	AVG	
11		17.6445	28.50	9.83	38.33	60.00	-21.67	QP	
12		17.6445	18.10	9.83	27.93	50.00	-22.07	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + camera on -Adapter: YINYJU (Y67401F3G00038)	Phase:	Neutral

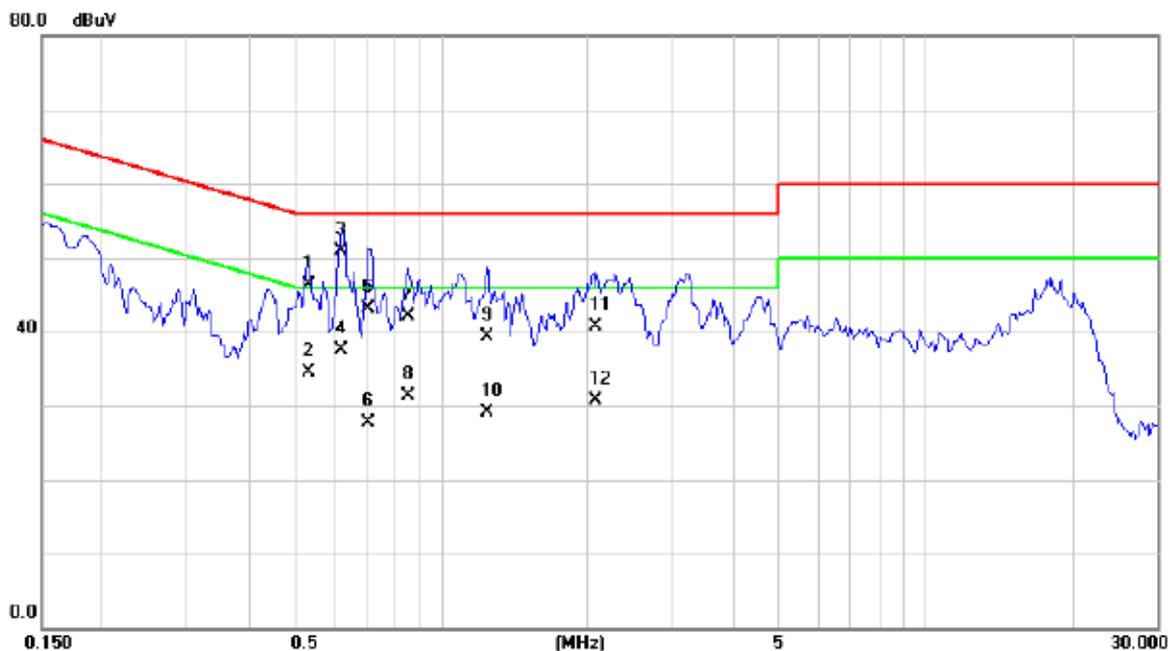

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.5328	36.70	9.56	46.26	56.00	-9.74	QP	
2		0.5328	25.00	9.56	34.56	46.00	-11.44	AVG	
3	*	0.6227	41.30	9.56	50.86	56.00	-5.14	QP	
4		0.6227	28.00	9.56	37.56	46.00	-8.44	AVG	
5		0.7086	33.60	9.53	43.13	56.00	-12.87	QP	
6		0.7086	18.10	9.53	27.63	46.00	-18.37	AVG	
7		0.8531	32.50	9.58	42.08	56.00	-13.92	QP	
8		0.8531	21.70	9.58	31.28	46.00	-14.72	AVG	
9		1.2437	29.60	9.62	39.22	56.00	-16.78	QP	
10		1.2437	19.40	9.62	29.02	46.00	-16.98	AVG	
11		2.0953	30.90	9.73	40.63	56.00	-15.37	QP	
12		2.0953	20.90	9.73	30.63	46.00	-15.37	AVG	

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

CISPR 22 or CAN/CSA-CISPR 22-10:

Frequency (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	
30 - 230	40	30
230 - 1000	47	37

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B: 2014;
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jul. 09, 2015
2	Pre-Amplifier	Anritsu	MH648A	M92649	Apr. 16, 2016
3	Test Cable	TIMES	LMR-400	12M	May 12, 2016
4	Test Cable	TIMES	LMR-400	3M	May 12, 2016
5	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
6	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
7	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jan. 11, 2016
8	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 14, 2016
9	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
10	Microflex Cable	AISI	S104-SMAP-1	10M	May 13, 2016
11	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May 11, 2016
12	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
13	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Remark: " N/A" denotes no model name, serial No. or no calibration specified.

4.2.3 TEST PROCEDURE


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

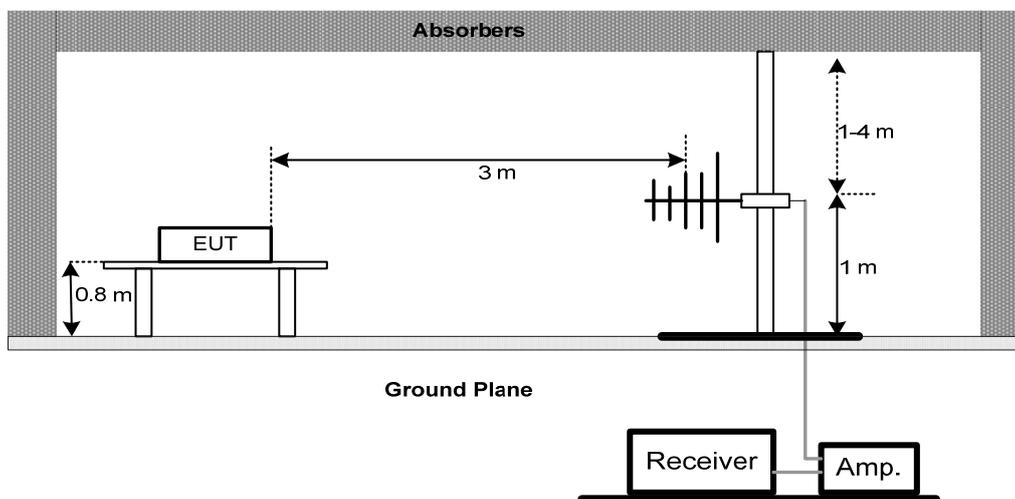

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

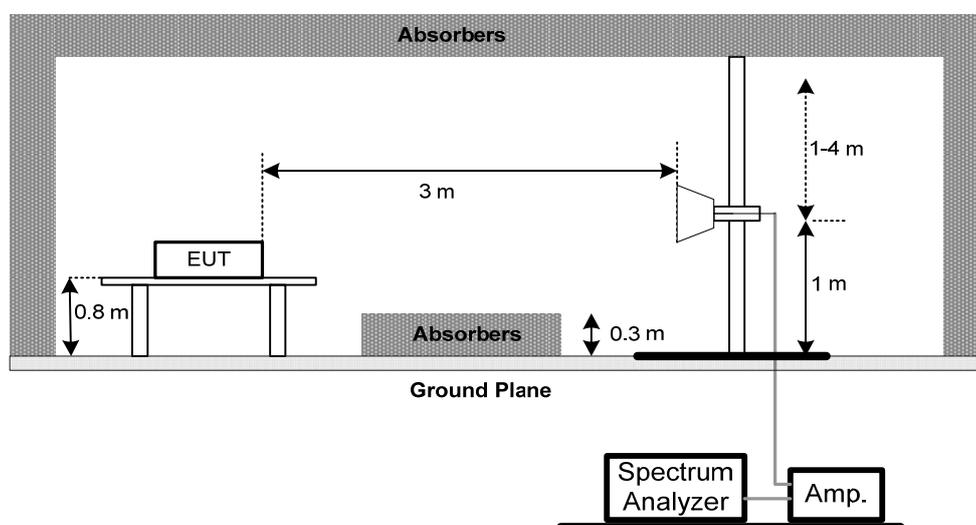

4.2.6 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.7 TEST RESULTS-BETWEEN 30MHZ AND 1000MHZ

Remark:


- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 2.4G wifi + BT + GPS + earphone + Playing – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Vertical

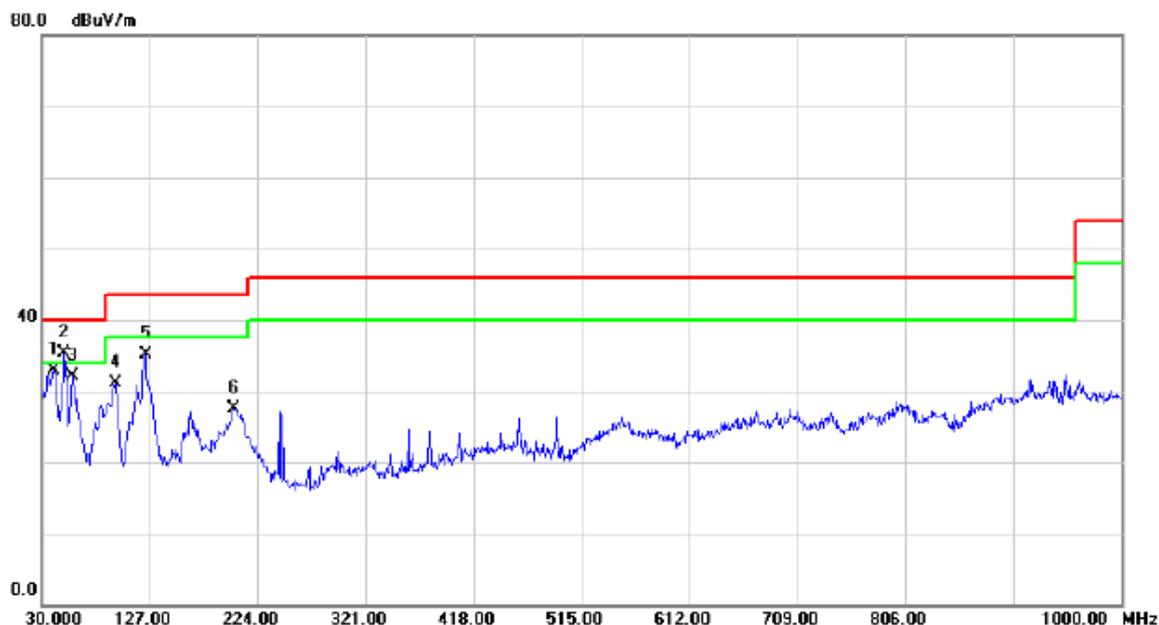


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		40.6700	47.13	-14.13	33.00	40.00	-7.00	QP	
2	*	50.3700	49.05	-13.73	35.32	40.00	-4.68	QP	
3		57.1600	46.50	-14.44	32.06	40.00	-7.94	QP	
4		95.9600	50.46	-19.43	31.03	43.50	-12.47	QP	
5		123.1200	51.08	-15.94	35.14	43.50	-8.36	QP	
6		202.6600	44.26	-16.68	27.58	43.50	-15.92	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 2.4G wifi + BT + GPS + earphone + Playing – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Horizontal

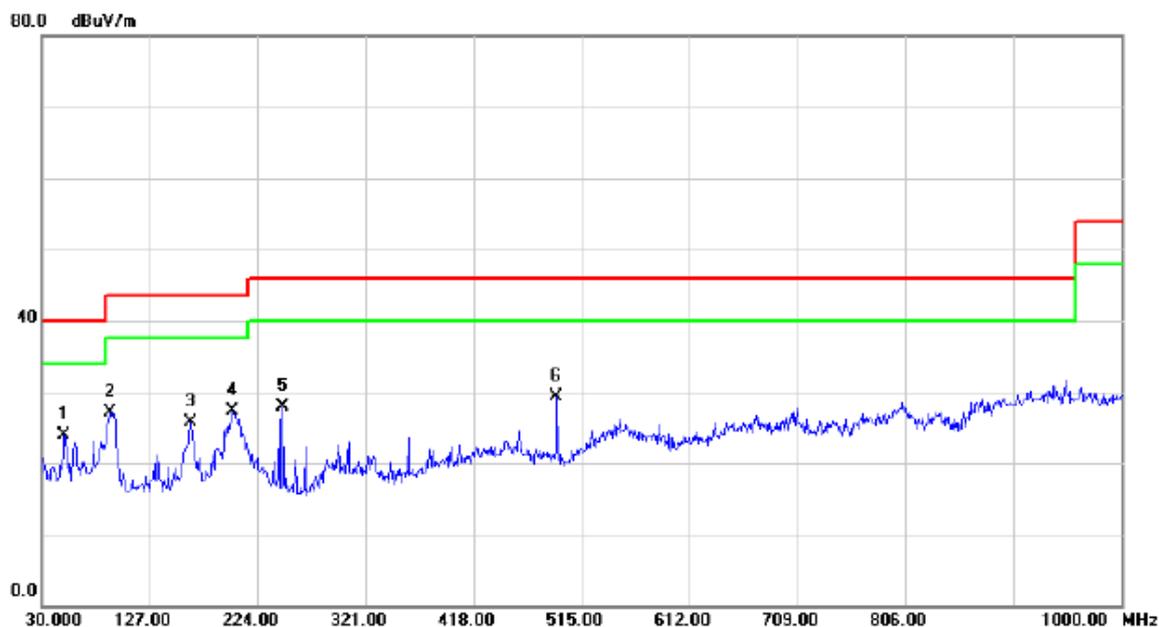


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	50.3700	37.69	-13.73	23.96	40.00	-16.04	QP	
2		91.1100	47.17	-20.16	27.01	43.50	-16.49	QP	
3		163.8600	39.81	-14.11	25.70	43.50	-17.80	QP	
4		200.7200	43.98	-16.71	27.27	43.50	-16.23	QP	
5		246.3100	43.16	-15.19	27.97	46.00	-18.03	QP	
6		492.6900	38.72	-9.36	29.36	46.00	-16.64	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 2.4G wifi + BT + GPS + earphone + Playing – Adapter: BYD / Set upright (HWBYA32DC1600019)	Polarization:	Vertical

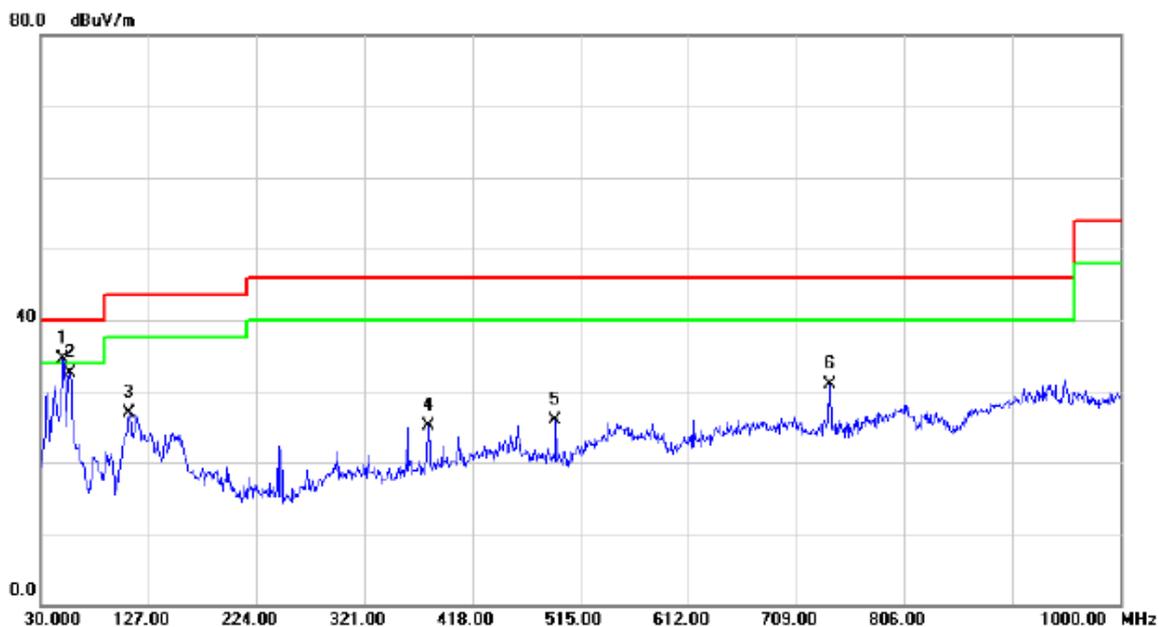


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	50.3700	48.20	-13.73	34.47	40.00	-5.53	QP	
2		56.1900	46.84	-14.34	32.50	40.00	-7.50	QP	
3		109.5400	44.20	-17.39	26.81	43.50	-16.69	QP	
4		378.2300	36.79	-11.64	25.15	46.00	-20.85	QP	
5		492.6900	35.29	-9.36	25.93	46.00	-20.07	QP	
6		739.0700	35.91	-5.10	30.81	46.00	-15.19	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 2.4G wifi + BT + GPS + earphone + Playing – Adapter: BYD / Set upright (HWBYA32DC1600019)	Polarization:	Horizontal

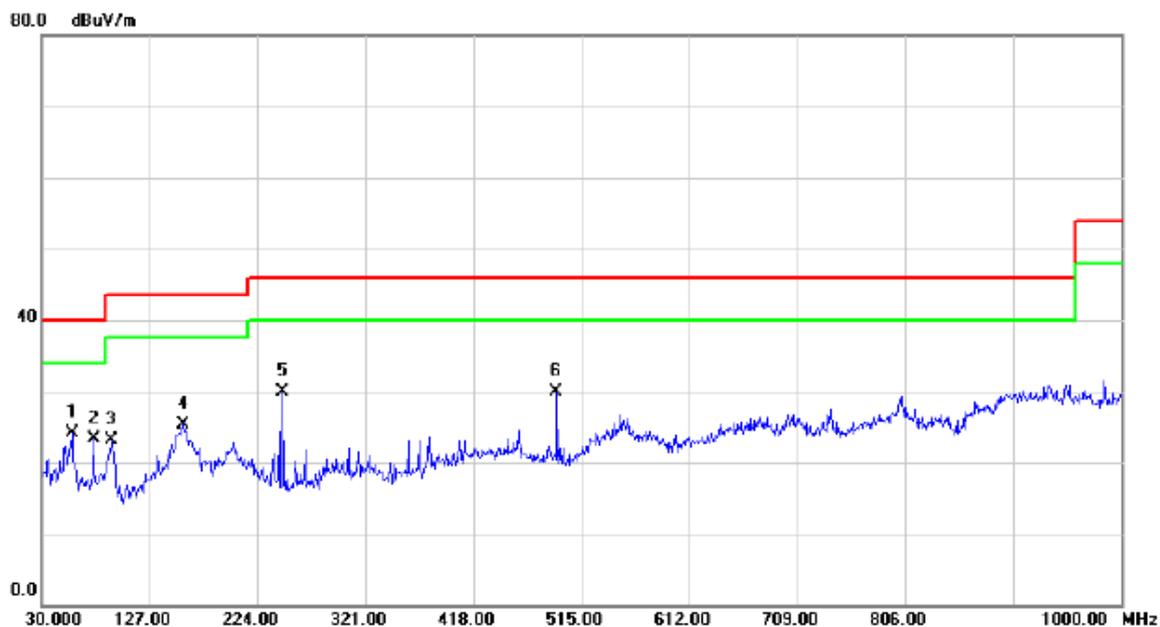


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.1600	38.47	-14.44	24.03	40.00	-15.97	QP	
2		76.5600	40.86	-17.48	23.38	40.00	-16.62	QP	
3		93.0500	43.03	-19.86	23.17	43.50	-20.33	QP	
4		157.0700	39.23	-13.96	25.27	43.50	-18.23	QP	
5		246.3100	45.17	-15.19	29.98	46.00	-16.02	QP	
6		492.6900	39.27	-9.36	29.91	46.00	-16.09	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Vertical

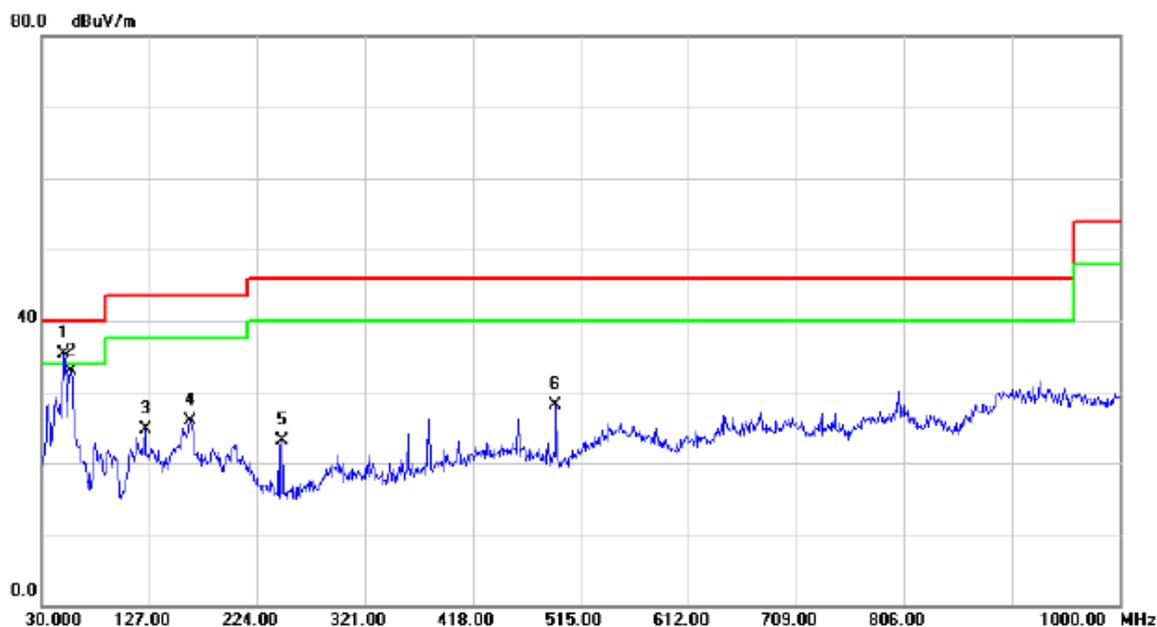


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	50.3700	49.12	-13.73	35.39	40.00	-4.61	QP	
2	56.1900	47.22	-14.34	32.88	40.00	-7.12	QP	
3	123.1200	40.71	-15.94	24.77	43.50	-18.73	QP	
4	163.8600	40.03	-14.11	25.92	43.50	-17.58	QP	
5	246.3100	38.36	-15.19	23.17	46.00	-22.83	QP	
6	492.6900	37.55	-9.36	28.19	46.00	-17.81	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Horizontal

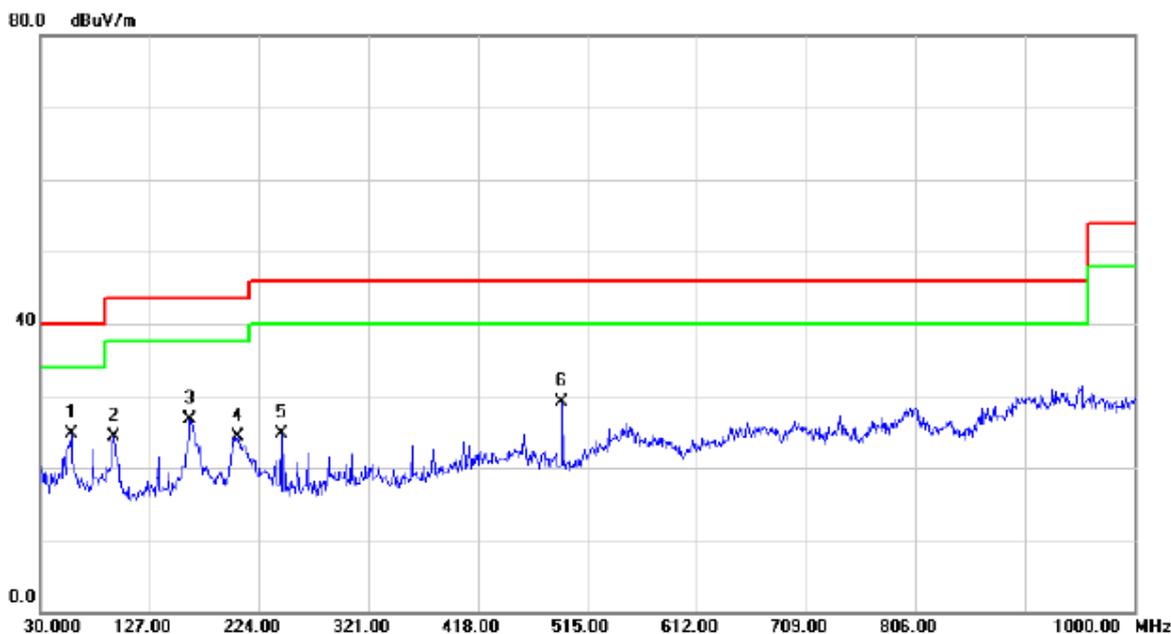


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.1600	39.10	-14.44	24.66	40.00	-15.34	QP	
2		94.9900	43.86	-19.58	24.28	43.50	-19.22	QP	
3		162.8900	40.84	-14.06	26.78	43.50	-16.72	QP	
4		204.6000	41.02	-16.65	24.37	43.50	-19.13	QP	
5		243.4000	39.98	-15.22	24.76	46.00	-21.24	QP	
6		492.6900	38.52	-9.36	29.16	46.00	-16.84	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + camera on – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Vertical

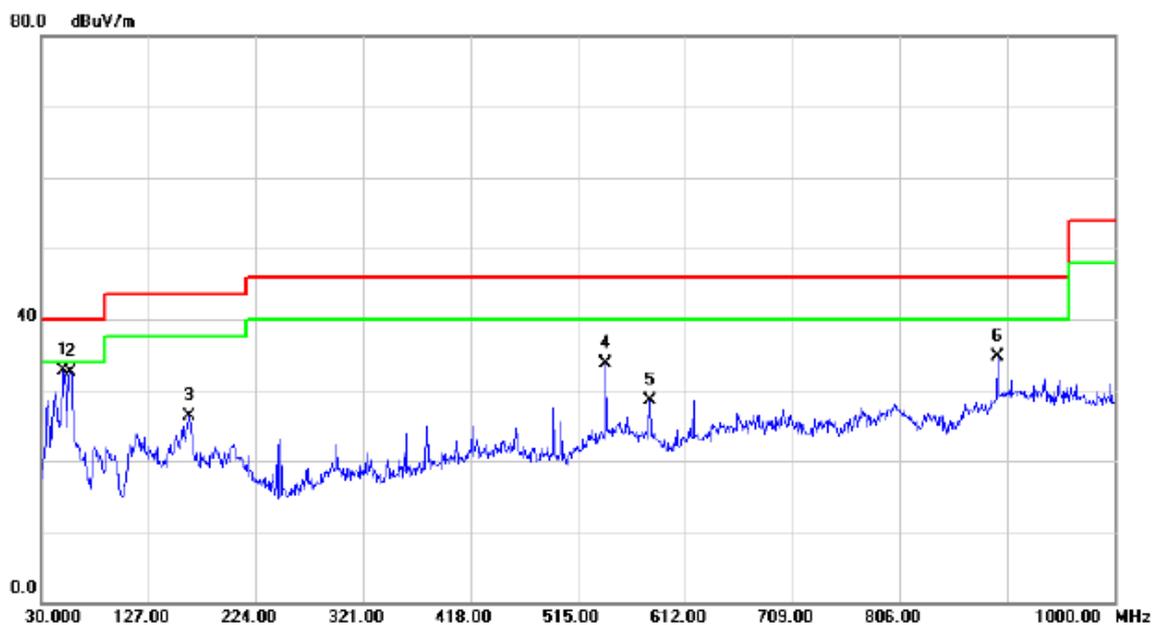


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	50.3700	46.49	-13.73	32.76	40.00	-7.24	QP	
2		56.1900	46.75	-14.34	32.41	40.00	-7.59	QP	
3		163.8600	40.35	-14.11	26.24	43.50	-17.26	QP	
4		540.2200	41.87	-8.24	33.63	46.00	-12.37	QP	
5		579.9900	36.25	-7.67	28.58	46.00	-17.42	QP	
6		894.2700	37.60	-2.94	34.66	46.00	-11.34	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + camera on – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Horizontal

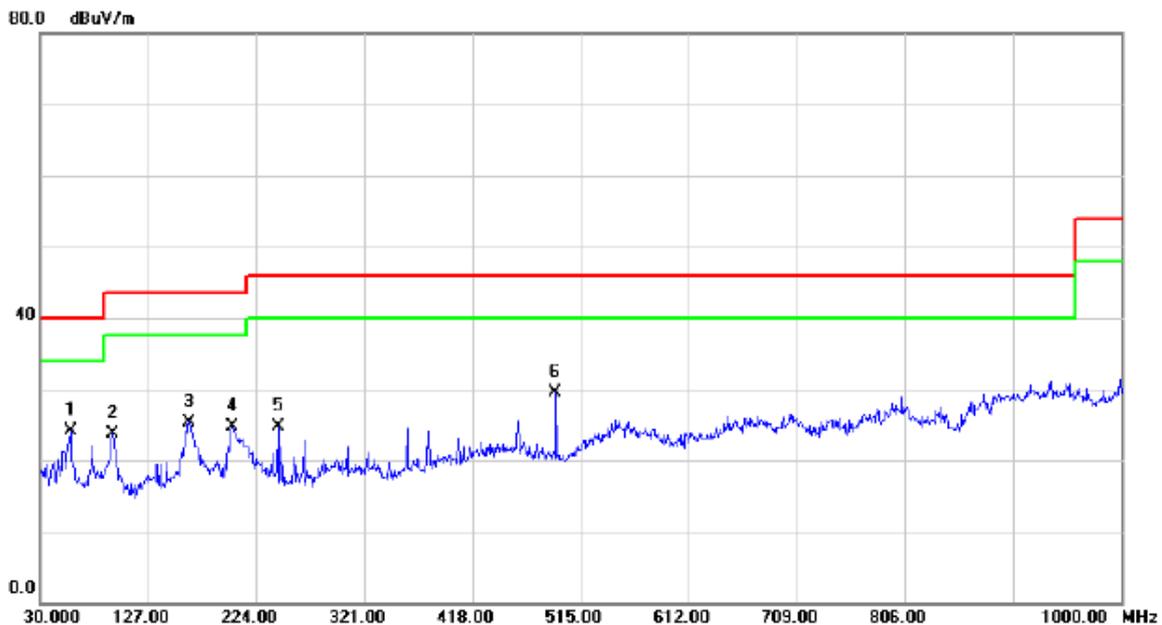


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	57.1600	38.63	-14.44	24.19	40.00	-15.81	QP	
2	94.9900	43.31	-19.58	23.73	43.50	-19.77	QP	
3	163.8600	39.32	-14.11	25.21	43.50	-18.29	QP	
4	202.6600	41.38	-16.68	24.70	43.50	-18.80	QP	
5	243.4000	40.01	-15.22	24.79	46.00	-21.21	QP	
6	492.6900	38.88	-9.36	29.52	46.00	-16.48	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + Speaker + Playing- Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Vertical

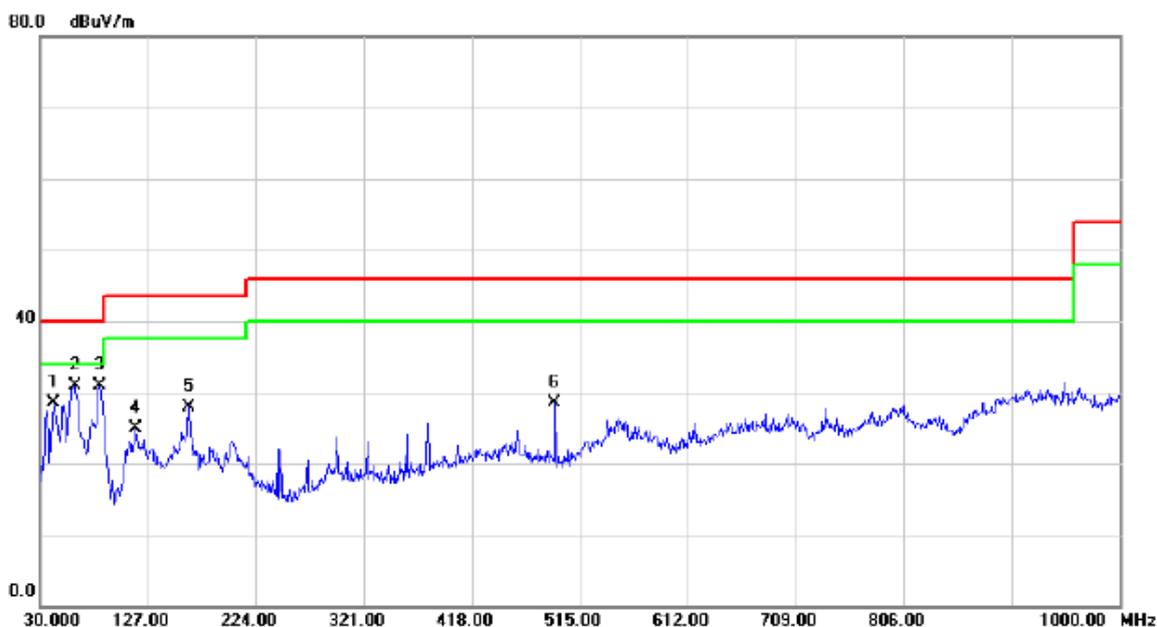


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		42.6100	42.36	-13.92	28.44	40.00	-11.56	QP	
2		61.0400	45.73	-14.90	30.83	40.00	-9.17	QP	
3	*	83.3500	49.84	-18.86	30.98	40.00	-9.02	QP	
4		115.3600	41.73	-16.74	24.99	43.50	-18.51	QP	
5		163.8600	41.92	-14.11	27.81	43.50	-15.69	QP	
6		492.6900	37.84	-9.36	28.48	46.00	-17.52	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + Speaker + Playing- Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Horizontal

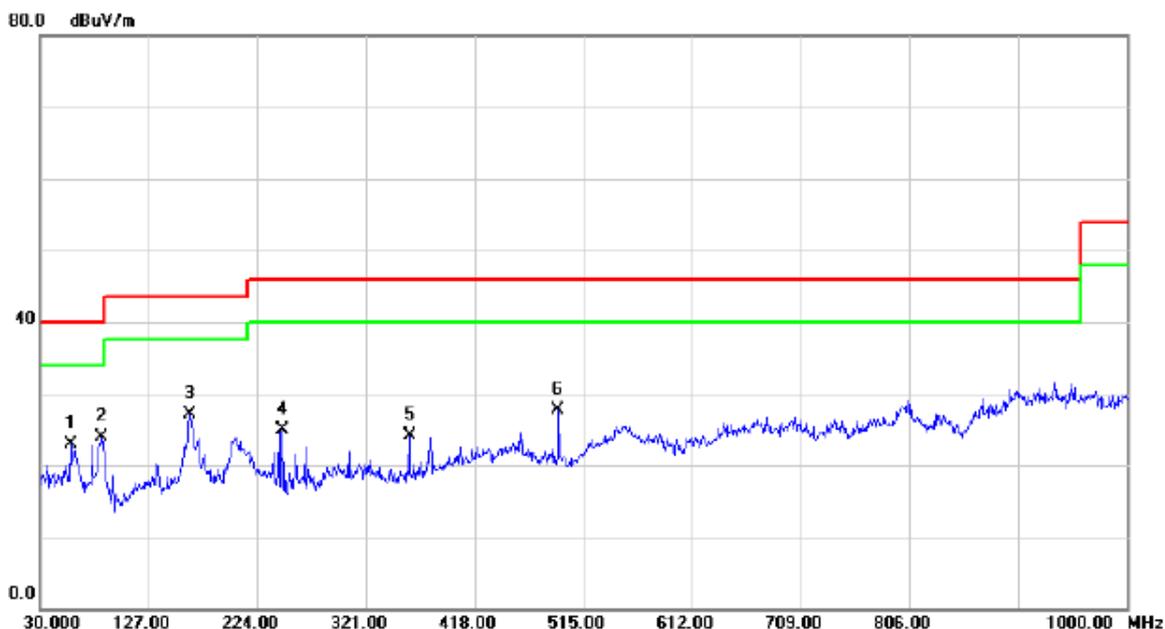

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		57.1600	37.43	-14.44	22.99	40.00	-17.01	QP	
2	*	85.2900	43.12	-19.27	23.85	40.00	-16.15	QP	
3		163.8600	41.26	-14.11	27.15	43.50	-16.35	QP	
4		246.3100	40.03	-15.19	24.84	46.00	-21.16	QP	
5		359.8000	36.25	-12.08	24.17	46.00	-21.83	QP	
6		492.6900	37.13	-9.36	27.77	46.00	-18.23	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: HK / Desktop (HWHKA5E32707819)	Polarization:	Vertical

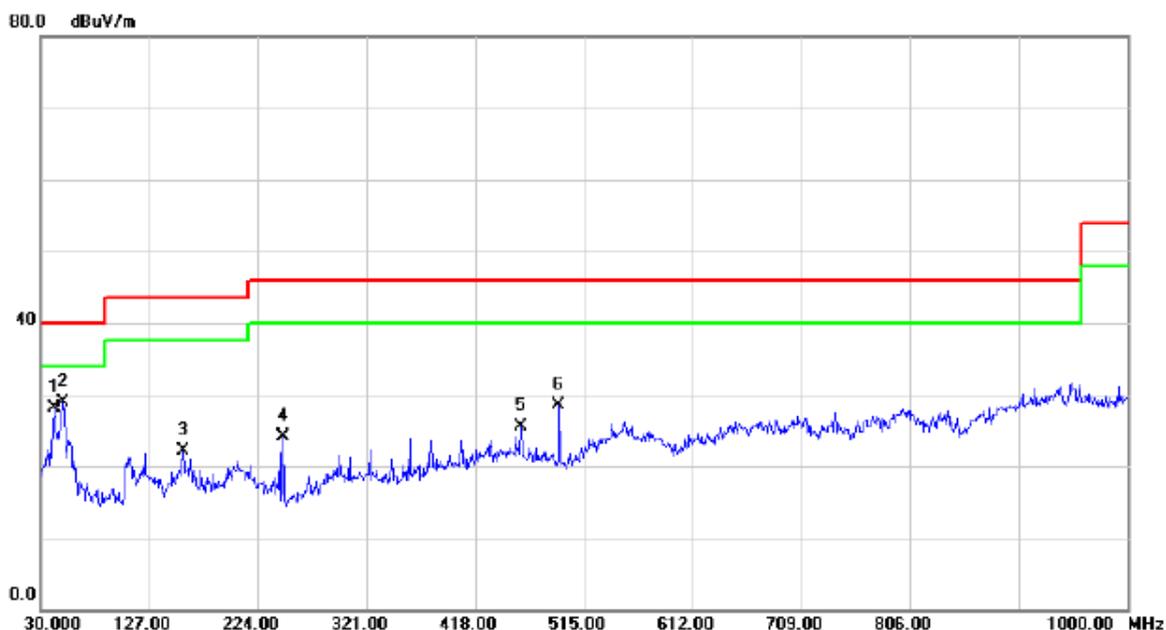


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	42.6100	41.95	-13.92	28.03	40.00	-11.97	QP	
2 *	50.3700	42.63	-13.73	28.90	40.00	-11.10	QP	
3	157.0700	35.98	-13.96	22.02	43.50	-21.48	QP	
4	246.3100	39.33	-15.19	24.14	46.00	-21.86	QP	
5	458.7400	35.13	-9.61	25.52	46.00	-20.48	QP	
6	492.6900	37.87	-9.36	28.51	46.00	-17.49	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: HK / Desktop(HWHKA5E32707819)	Polarization:	Horizontal




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		57.1600	36.62	-14.44	22.18	40.00	-17.82	QP	
2		205.5700	38.51	-16.64	21.87	43.50	-21.63	QP	
3		243.4000	39.88	-15.22	24.66	46.00	-21.34	QP	
4		359.8000	36.65	-12.08	24.57	46.00	-21.43	QP	
5		492.6900	37.74	-9.36	28.38	46.00	-17.62	QP	
6	*	949.5600	34.72	-1.77	32.95	46.00	-13.05	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	USB R/W + Idle + 5G wifi + BT + GPS + earphone	Polarization:	Vertical

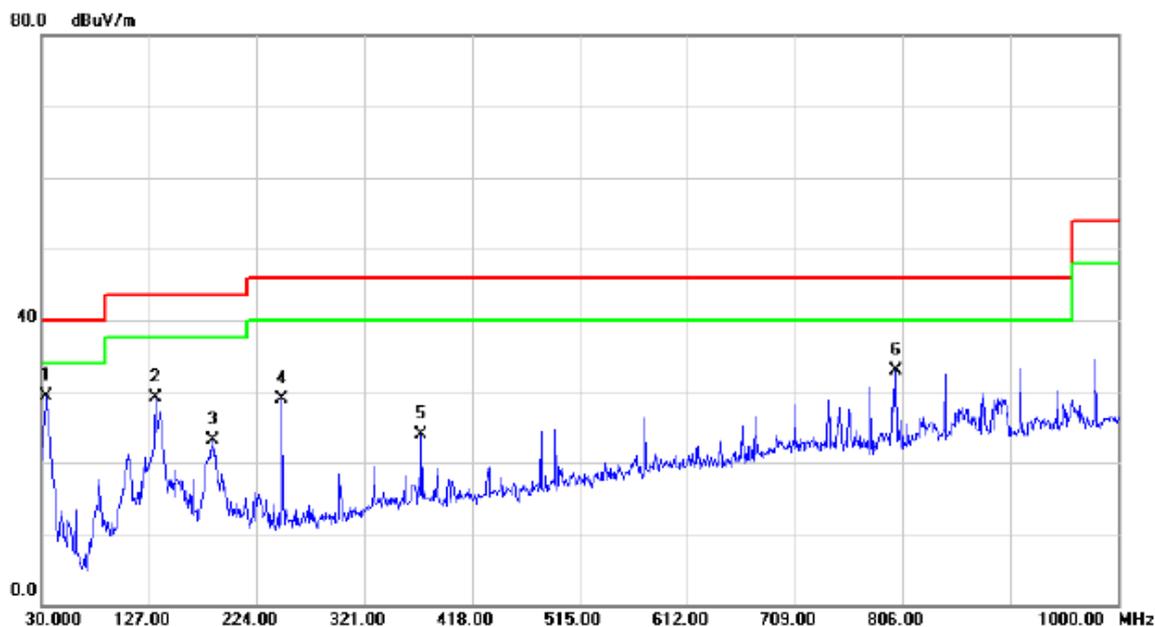


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	34.8500	44.43	-15.15	29.28	40.00	-10.72	QP	
2		132.8200	44.11	-15.05	29.06	43.50	-14.44	QP	
3		184.2300	39.08	-15.96	23.12	43.50	-20.38	QP	
4		246.3100	44.11	-15.19	28.92	46.00	-17.08	QP	
5		372.4100	35.73	-11.79	23.94	46.00	-22.06	QP	
6		800.1800	37.70	-4.74	32.96	46.00	-13.04	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	USB R/W + Idle + 5G wifi + BT + GPS + earphone	Polarization:	Horizontal

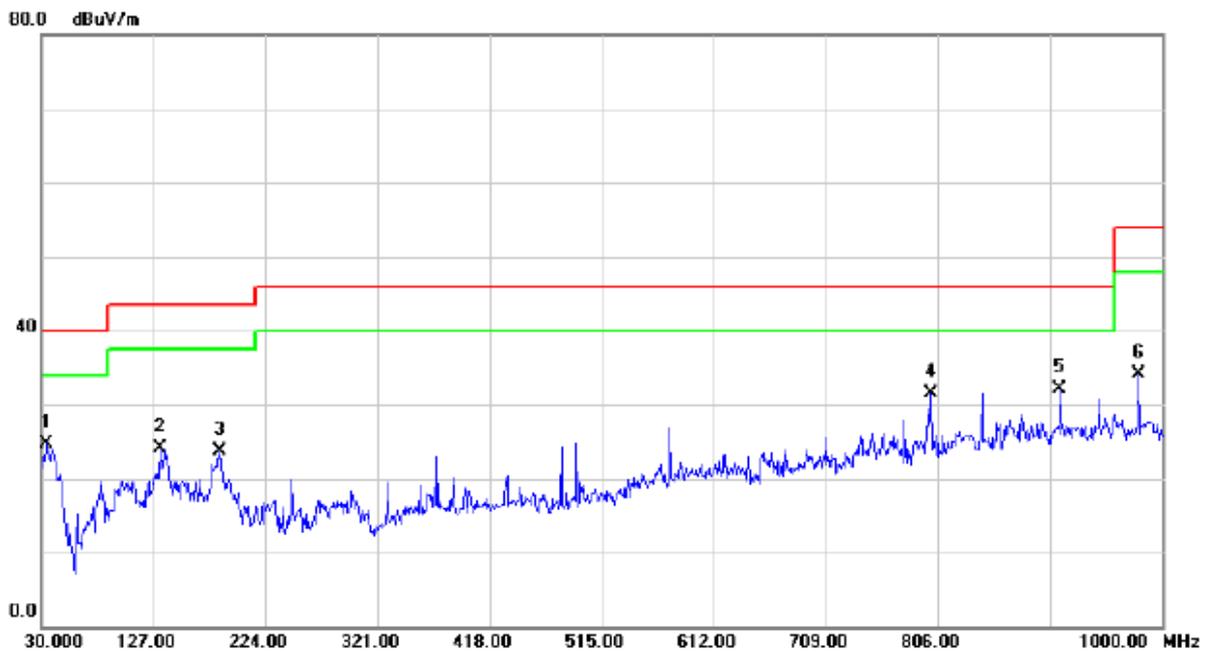


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		34.8500	39.93	-15.15	24.78	40.00	-15.22	QP	
2		132.8200	39.11	-15.05	24.06	43.50	-19.44	QP	
3		184.2300	39.58	-15.96	23.62	43.50	-19.88	QP	
4		800.1800	36.20	-4.74	31.46	46.00	-14.54	QP	
5	*	911.7300	34.79	-2.59	32.20	46.00	-13.80	QP	
6		979.6300	35.55	-1.47	34.08	54.00	-19.92	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: BYD / Desktop (B67432F1E00013)	Polarization:	Vertical

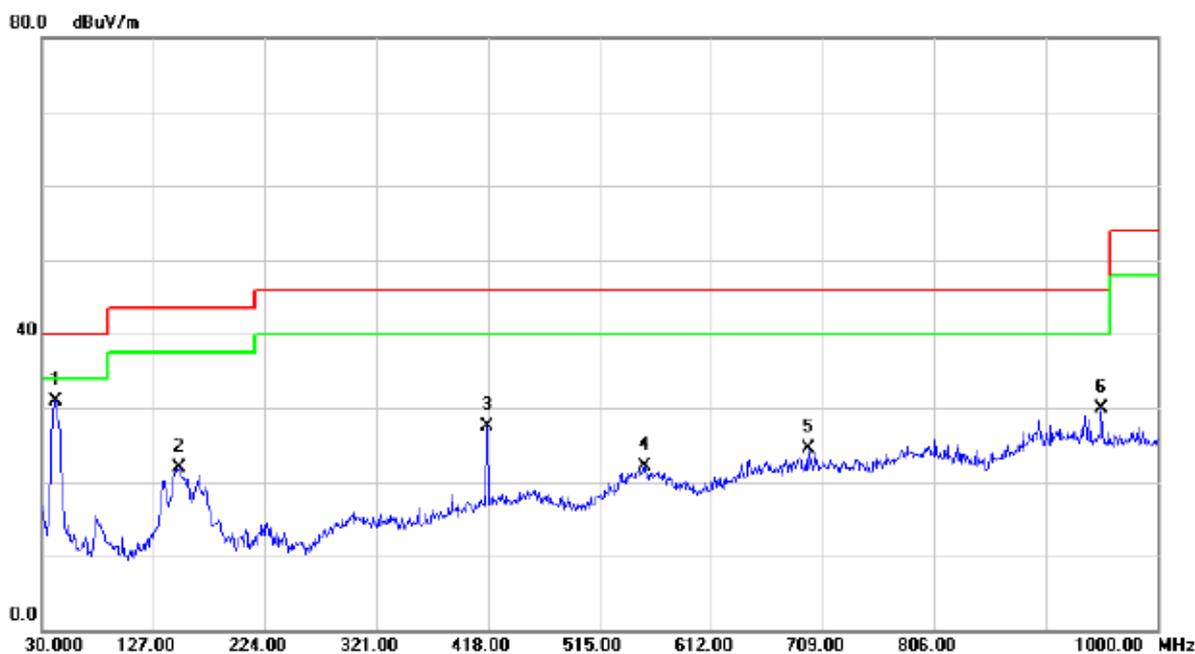


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	41.6400	44.66	-13.72	30.94	40.00	-9.06	QP	
2		149.3100	35.07	-13.08	21.99	43.50	-21.51	QP	
3		417.0300	36.37	-8.89	27.48	46.00	-18.52	QP	
4		553.8000	27.39	-5.35	22.04	46.00	-23.96	QP	
5		696.3900	28.73	-4.26	24.47	46.00	-21.53	QP	
6		951.5000	30.08	-0.20	29.88	46.00	-16.12	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: BYD / Desktop(B67432F1E00013)	Polarization:	Horizontal

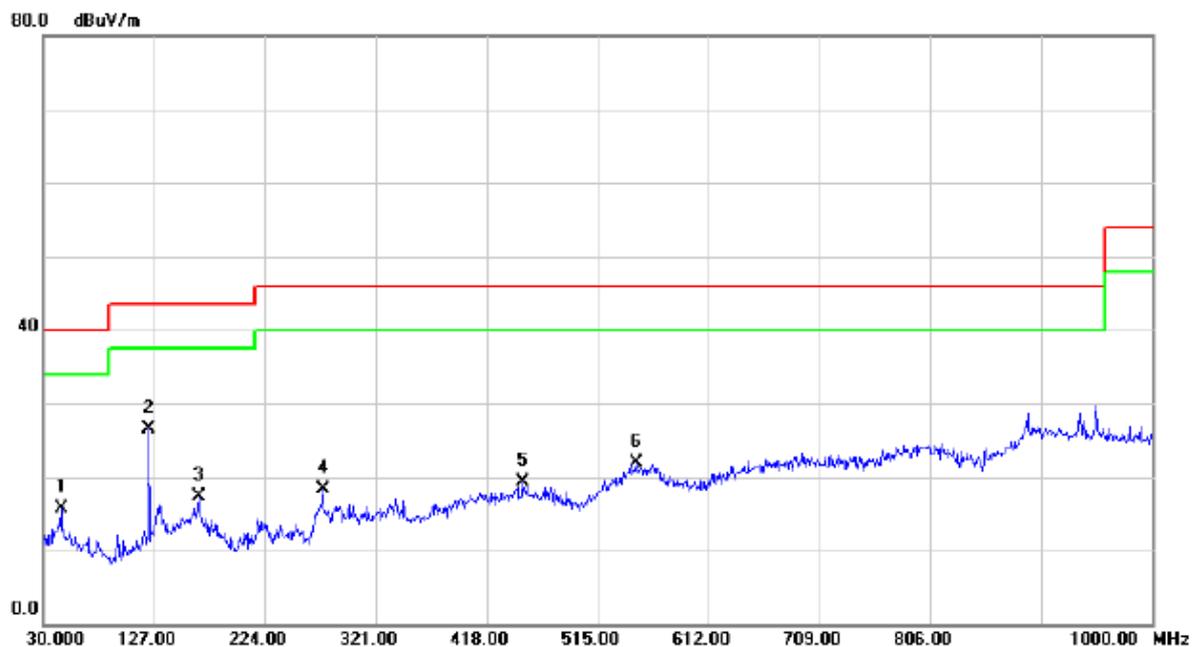


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		45.5200	28.96	-13.25	15.71	40.00	-24.29	QP	
2	*	122.1500	40.33	-13.81	26.52	43.50	-16.98	QP	
3		165.8000	29.93	-12.68	17.25	43.50	-26.25	QP	
4		274.4400	31.31	-12.98	18.33	46.00	-27.67	QP	
5		449.0400	27.41	-8.08	19.33	46.00	-26.67	QP	
6		548.9500	27.10	-5.24	21.86	46.00	-24.14	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: HK / Desktop (H67416F6100005)	Polarization:	Vertical

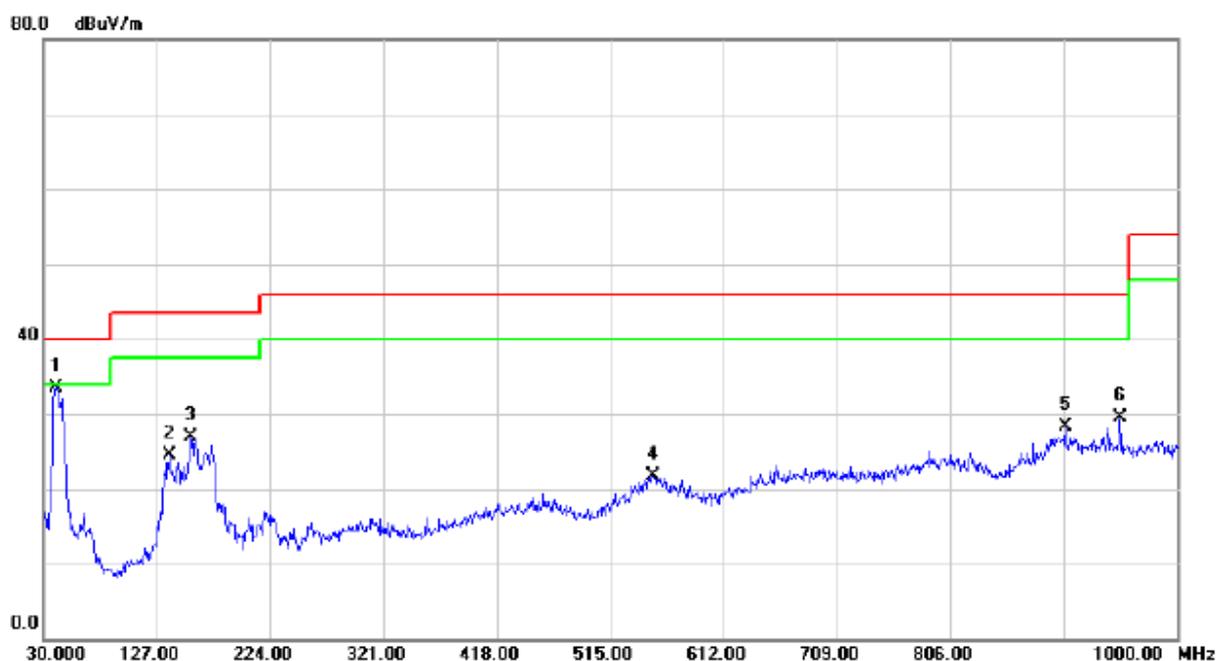

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40.6700	47.40	-13.87	33.53	40.00	-6.47	QP	
2		137.6700	38.27	-13.85	24.42	43.50	-19.08	QP	
3		156.1000	39.66	-12.66	27.00	43.50	-16.50	QP	
4		551.8600	26.99	-5.25	21.74	46.00	-24.26	QP	
5		904.9400	27.94	0.39	28.33	46.00	-17.67	QP	
6		951.5000	29.72	-0.20	29.52	46.00	-16.48	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: HK / Desktop(H67416F6100005)	Polarization:	Horizontal

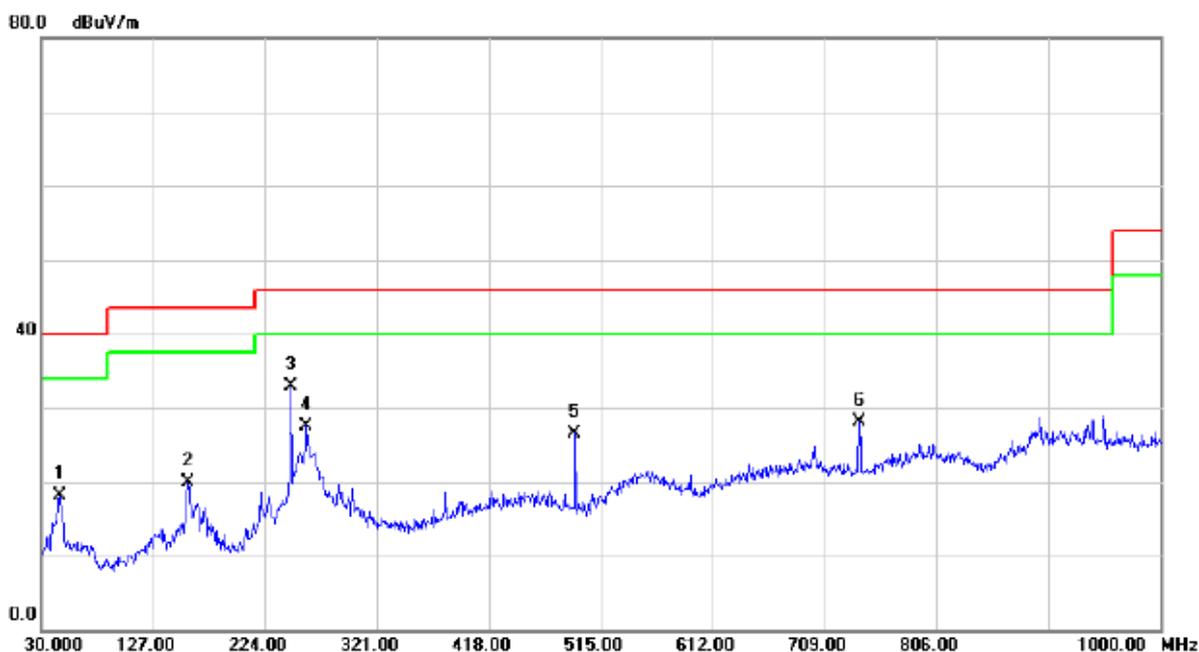


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		45.5200	31.41	-13.25	18.16	40.00	-21.84	QP	
2		157.0700	32.45	-12.59	19.86	43.50	-23.64	QP	
3	*	246.3100	47.22	-14.24	32.98	46.00	-13.02	QP	
4		259.8900	41.96	-14.36	27.60	46.00	-18.40	QP	
5		492.6900	36.17	-9.70	26.47	46.00	-19.53	QP	
6		739.0700	32.55	-4.51	28.04	46.00	-17.96	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: PHITEK / Desktop(P67401F5W00017)	Polarization:	Vertical




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	45.5200	46.37	-13.25	33.12	40.00	-6.88	QP	
2		145.4300	39.27	-13.50	25.77	43.50	-17.73	QP	
3		172.5900	39.78	-12.90	26.88	43.50	-16.62	QP	
4		550.8900	27.39	-5.19	22.20	46.00	-23.80	QP	
5		798.2400	26.74	-2.16	24.58	46.00	-21.42	QP	
6		950.5300	29.22	-0.19	29.03	46.00	-16.97	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: PHITEK / Desktop(P67401F5W00017)	Polarization:	Horizontal

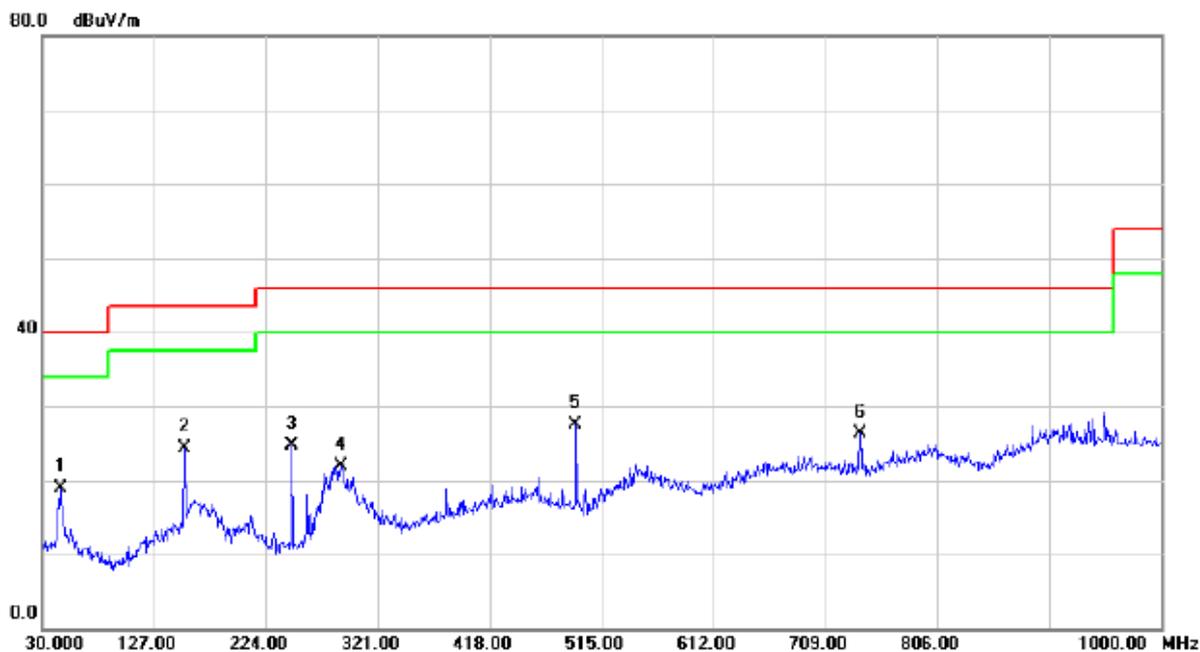


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		45.5200	32.21	-13.25	18.96	40.00	-21.04	QP	
2		153.1900	37.04	-12.82	24.22	43.50	-19.28	QP	
3		246.3100	39.04	-14.24	24.80	46.00	-21.20	QP	
4		288.9900	33.10	-11.13	21.97	46.00	-24.03	QP	
5	*	492.6900	37.27	-9.70	27.57	46.00	-18.43	QP	
6		739.0700	30.87	-4.51	26.36	46.00	-19.64	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: YINJU / Desktop (Y67401F3G00038)	Polarization:	Vertical

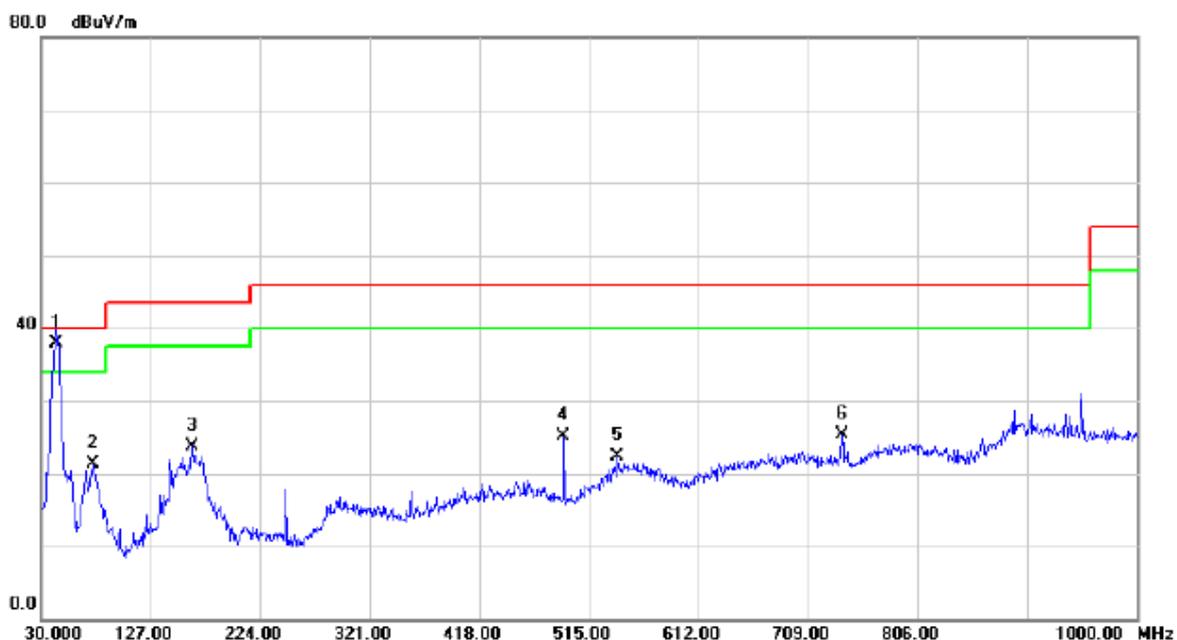

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	43.5800	51.50	-13.53	37.97	40.00	-2.03	QP	
2		75.5900	37.66	-16.31	21.35	40.00	-18.65	QP	
3		163.8600	36.23	-12.60	23.63	43.50	-19.87	QP	
4		492.6900	34.88	-9.70	25.18	46.00	-20.82	QP	
5		540.2200	28.34	-6.09	22.25	46.00	-23.75	QP	
6		739.0700	29.82	-4.51	25.31	46.00	-20.69	QP	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: HK / Desktop(Y67401F3G00038)	Polarization:	Horizontal

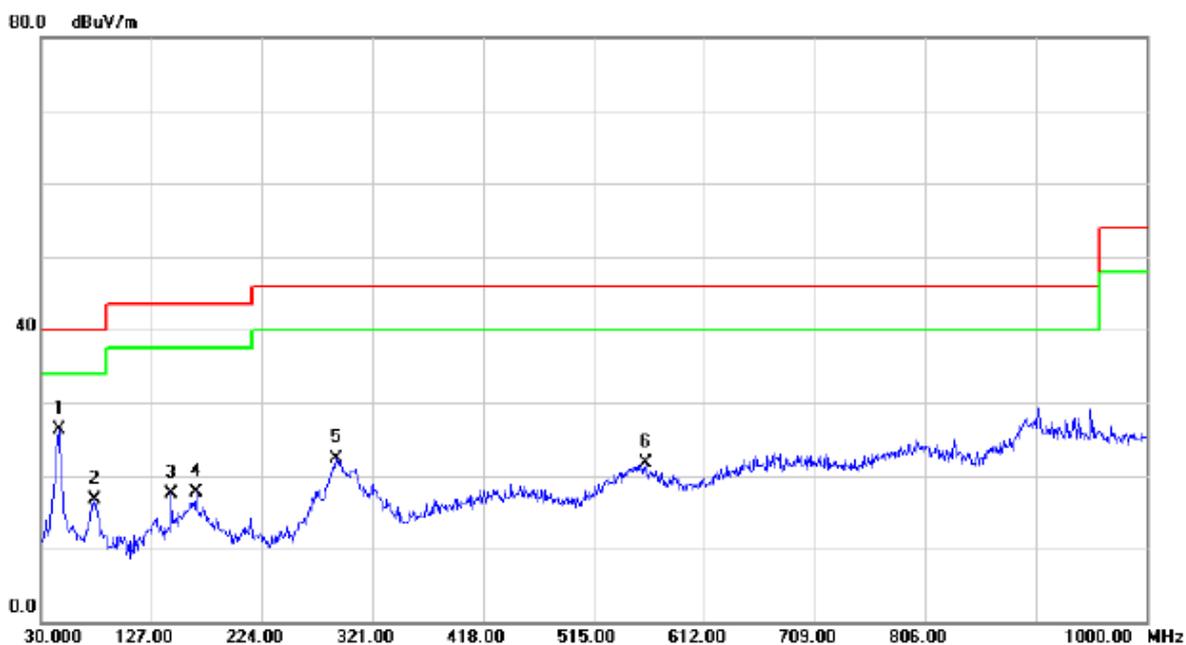


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	45.5200	39.56	-13.25	26.31	40.00	-13.69	QP	
2		76.5600	33.08	-16.40	16.68	40.00	-23.32	QP	
3		144.4600	31.17	-13.60	17.57	43.50	-25.93	QP	
4		165.8000	30.41	-12.68	17.73	43.50	-25.77	QP	
5		288.9900	33.47	-11.13	22.34	46.00	-23.66	QP	
6		560.5900	27.32	-5.71	21.61	46.00	-24.39	QP	

4.2.8 TEST RESULTS- ABOVE 1000MHZ

Remark:


- (1) Reading in which marked as Peak or AVG means measurements by using are Peak Mode or AVG with Detector BW=1MHz; SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz, AVG Mode with detector BW=1MHz; SPA setting in RBW=1MHz, VBW =10Hz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading Compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 1GHz to 40GHz.
- (4) For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also Complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 2.4G wifi + BT + GPS + earphone + Playing – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Vertical

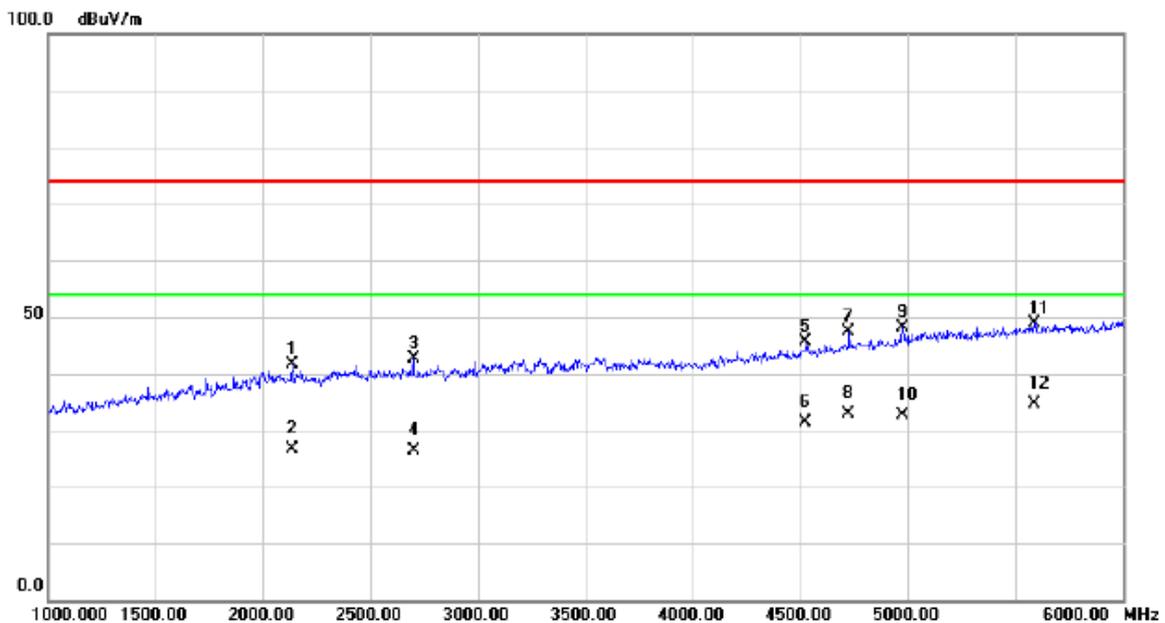


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2135.000	41.89	-0.19	41.70	74.00	-32.30	peak	
2		2135.000	26.85	-0.19	26.66	54.00	-27.34	AVG	
3		2700.000	41.89	0.67	42.56	74.00	-31.44	peak	
4		2700.000	25.78	0.67	26.45	54.00	-27.55	AVG	
5		4525.000	38.71	6.81	45.52	74.00	-28.48	peak	
6		4525.000	24.62	6.81	31.43	54.00	-22.57	AVG	
7		4725.000	39.92	7.38	47.30	74.00	-26.70	peak	
8		4725.000	25.48	7.38	32.86	54.00	-21.14	AVG	
9		4975.000	39.93	8.08	48.01	74.00	-25.99	peak	
10		4975.000	24.66	8.08	32.74	54.00	-21.26	AVG	
11		5590.000	39.42	9.35	48.77	74.00	-25.23	peak	
12	*	5590.000	25.40	9.35	34.75	54.00	-19.25	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 2.4G wifi + BT + GPS + earphone + Playing – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Horizontal

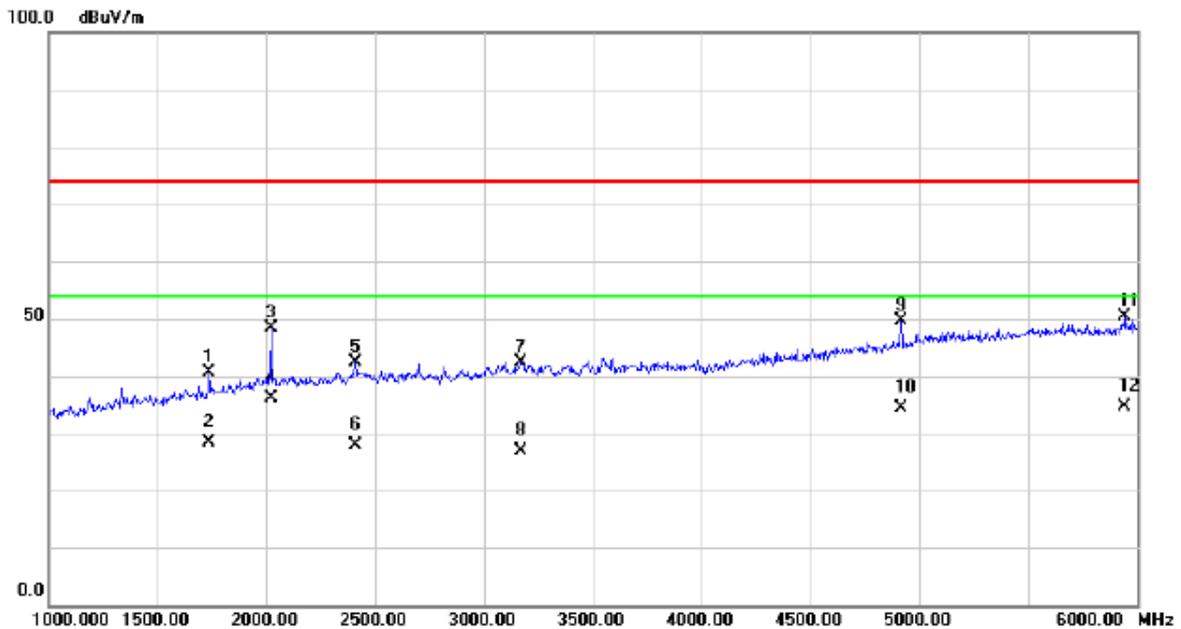


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1735.000	42.96	-2.21	40.75	74.00	-33.25	peak	
2	1735.000	30.62	-2.21	28.41	54.00	-25.59	AVG	
3	2020.000	48.83	-0.33	48.50	74.00	-25.50	peak	
4 *	2020.000	36.54	-0.33	36.21	54.00	-17.79	AVG	
5	2410.000	42.33	0.17	42.50	74.00	-31.50	peak	
6	2410.000	27.65	0.17	27.82	54.00	-26.18	AVG	
7	3170.000	40.58	1.86	42.44	74.00	-31.56	peak	
8	3170.000	25.14	1.86	27.00	54.00	-27.00	AVG	
9	4915.000	41.75	7.92	49.67	74.00	-24.33	peak	
10	4915.000	26.42	7.92	34.34	54.00	-19.66	AVG	
11	5945.000	40.35	9.92	50.27	74.00	-23.73	peak	
12	5945.000	24.67	9.92	34.59	54.00	-19.41	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 2.4G wifi + BT + GPS + earphone + Playing – Adapter: BYD / Set upright (HWBYA32DC1600019)	Polarization:	Vertical

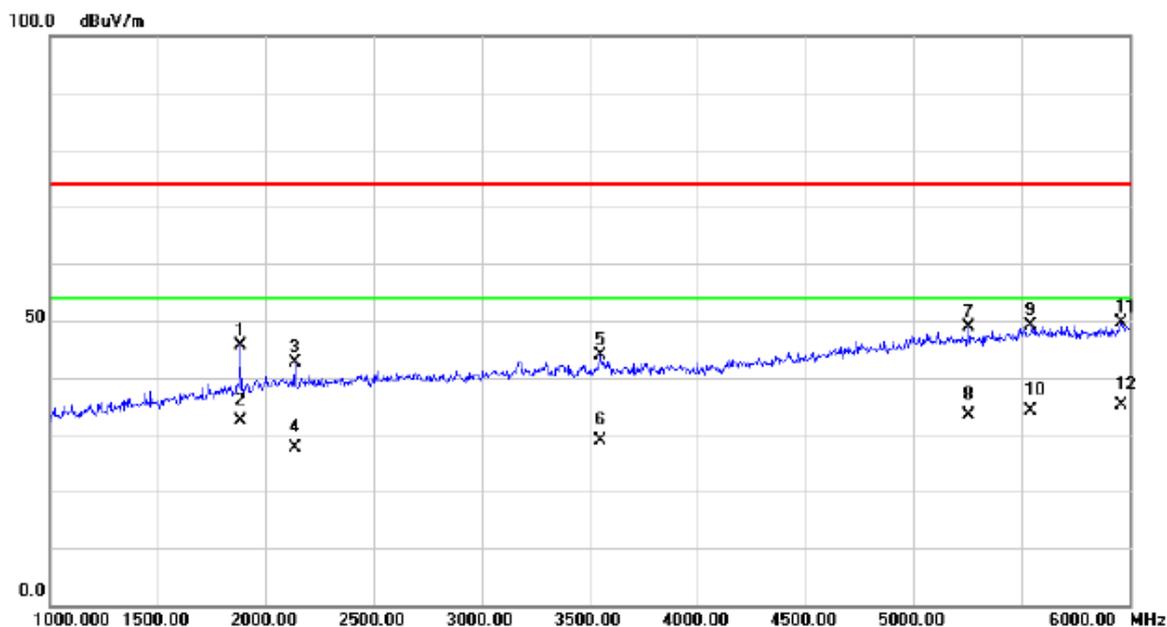


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1880.000	46.79	-1.20	45.59	74.00	-28.41	peak	
2	1880.000	33.52	-1.20	32.32	54.00	-21.68	AVG	
3	2135.000	42.70	-0.19	42.51	74.00	-31.49	peak	
4	2135.000	27.88	-0.19	27.69	54.00	-26.31	AVG	
5	3550.000	40.61	3.25	43.86	74.00	-30.14	peak	
6	3550.000	25.63	3.25	28.88	54.00	-25.12	AVG	
7	5255.000	40.08	8.68	48.76	74.00	-25.24	peak	
8	5255.000	24.78	8.68	33.46	54.00	-20.54	AVG	
9	5545.000	39.95	9.28	49.23	74.00	-24.77	peak	
10	5545.000	24.84	9.28	34.12	54.00	-19.88	AVG	
11	5960.000	39.56	9.95	49.51	74.00	-24.49	peak	
12 *	5960.000	25.13	9.95	35.08	54.00	-18.92	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 2.4G wifi + BT + GPS + earphone + Playing – Adapter: BYD / Set upright (HWBYA32DC1600019)	Polarization:	Horizontal

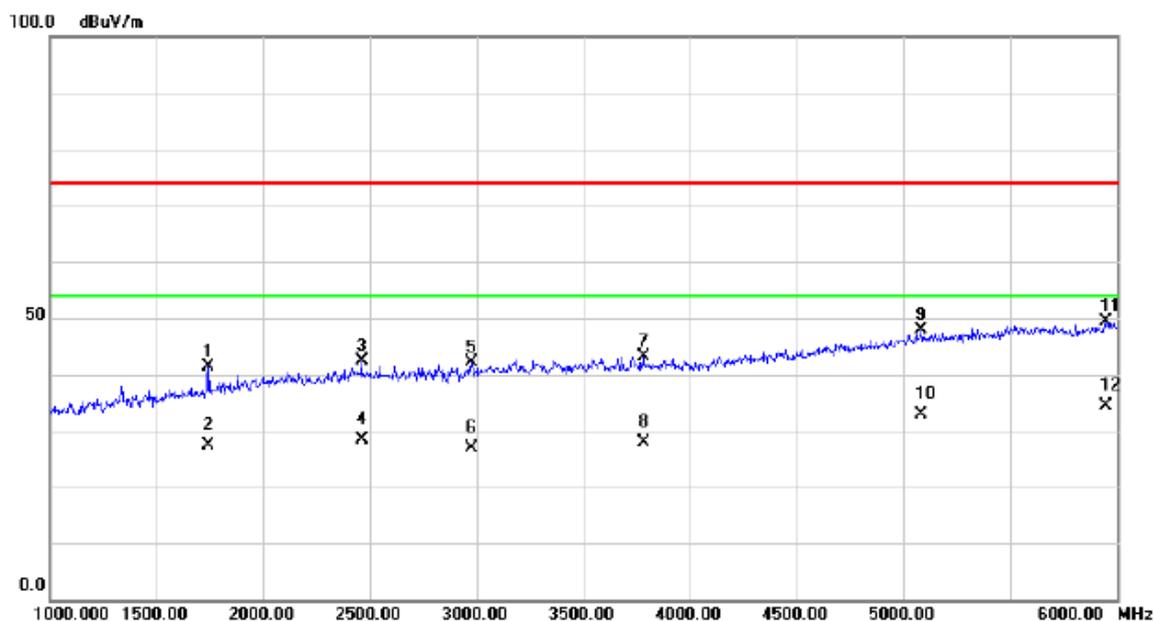


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1745.000	43.60	-2.15	41.45	74.00	-32.55	peak	
2	1745.000	29.41	-2.15	27.26	54.00	-26.74	AVG	
3	2460.000	42.26	0.23	42.49	74.00	-31.51	peak	
4	2460.000	28.12	0.23	28.35	54.00	-25.65	AVG	
5	2975.000	40.99	1.21	42.20	74.00	-31.80	peak	
6	2975.000	25.64	1.21	26.85	54.00	-27.15	AVG	
7	3780.000	38.84	4.35	43.19	74.00	-30.81	peak	
8	3780.000	23.47	4.35	27.82	54.00	-26.18	AVG	
9	5085.000	39.48	8.32	47.80	74.00	-26.20	peak	
10	5085.000	24.62	8.32	32.94	54.00	-21.06	AVG	
11	5950.000	39.55	9.93	49.48	74.00	-24.52	peak	
12 *	5950.000	24.51	9.93	34.44	54.00	-19.56	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Vertical

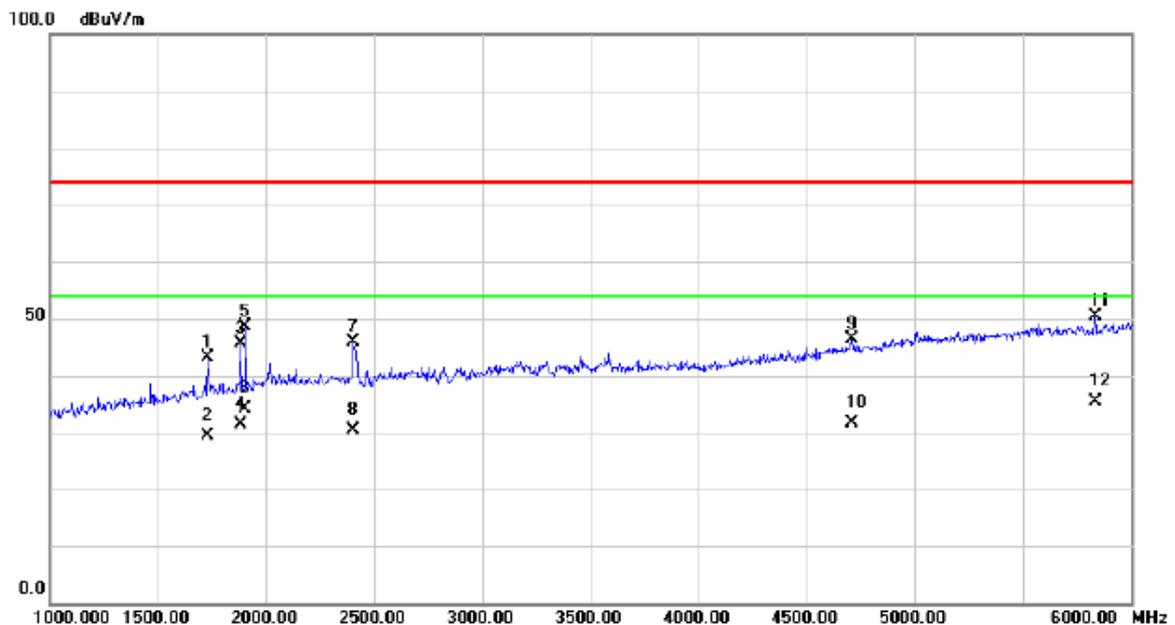


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1730.000	45.43	-2.25	43.18	74.00	-30.82	peak	
2	1730.000	31.58	-2.25	29.33	54.00	-24.67	AVG	
3	1880.000	46.94	-1.20	45.74	74.00	-28.26	peak	
4	1880.000	32.56	-1.20	31.36	54.00	-22.64	AVG	
5	1905.000	49.55	-1.02	48.53	74.00	-25.47	peak	
6	1905.000	35.14	-1.02	34.12	54.00	-19.88	AVG	
7	2405.000	45.73	0.15	45.88	74.00	-28.12	peak	
8	2405.000	30.11	0.15	30.26	54.00	-23.74	AVG	
9	4710.000	39.01	7.33	46.34	74.00	-27.66	peak	
10	4710.000	24.32	7.33	31.65	54.00	-22.35	AVG	
11	5835.000	40.60	9.75	50.35	74.00	-23.65	peak	
12 *	5835.000	25.56	9.75	35.31	54.00	-18.69	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Idle + 5G wifi + BT + GPS + earphone + Playing – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Horizontal

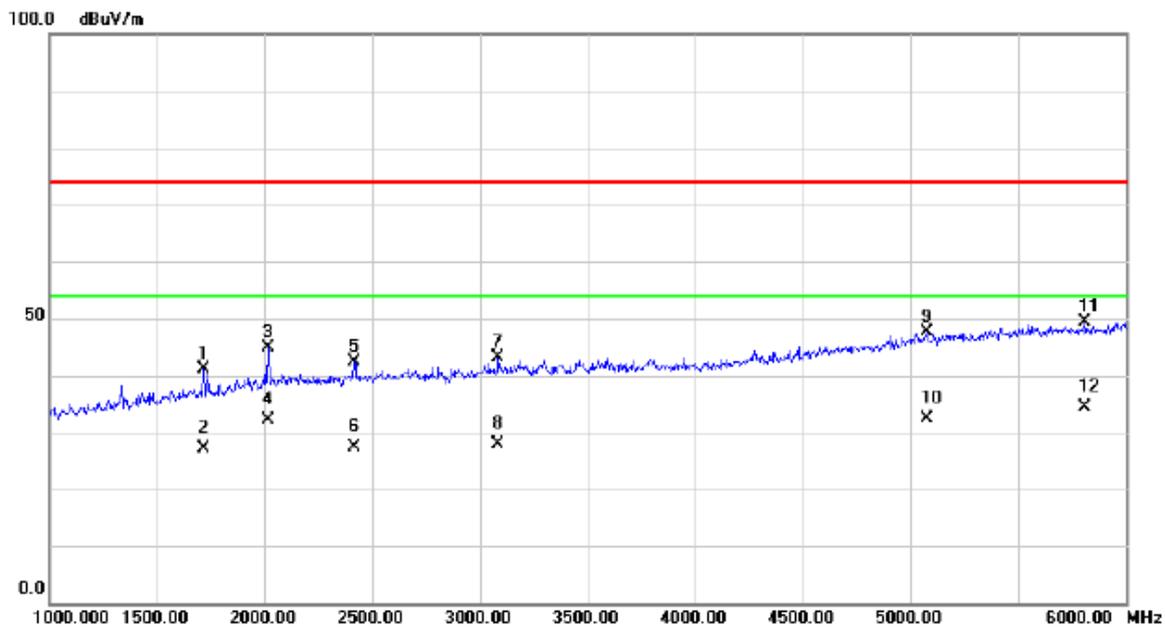


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1715.000	43.48	-2.36	41.12	74.00	-32.88	peak	
2		1715.000	29.56	-2.36	27.20	54.00	-26.80	AVG	
3		2015.000	45.27	-0.34	44.93	74.00	-29.07	peak	
4		2015.000	32.41	-0.34	32.07	54.00	-21.93	AVG	
5		2415.000	42.31	0.17	42.48	74.00	-31.52	peak	
6		2415.000	27.23	0.17	27.40	54.00	-26.60	AVG	
7		3085.000	41.47	1.55	43.02	74.00	-30.98	peak	
8		3085.000	26.42	1.55	27.97	54.00	-26.03	AVG	
9		5075.000	39.24	8.30	47.54	74.00	-26.46	peak	
10		5075.000	24.16	8.30	32.46	54.00	-21.54	AVG	
11		5810.000	39.73	9.71	49.44	74.00	-24.56	peak	
12	*	5810.000	24.66	9.71	34.37	54.00	-19.63	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Vertical

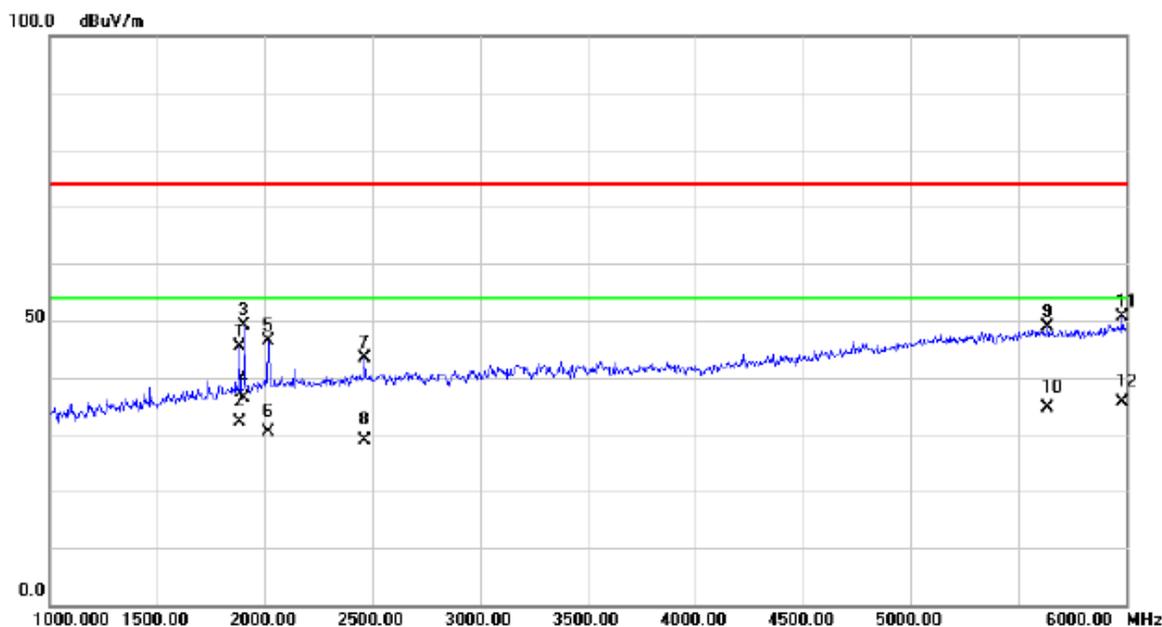


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1880.000	46.65	-1.20	45.45	74.00	-28.55	peak	
2	1880.000	33.35	-1.20	32.15	54.00	-21.85	AVG	
3	1905.000	50.19	-1.02	49.17	74.00	-24.83	peak	
4 *	1905.000	37.41	-1.02	36.39	54.00	-17.61	AVG	
5	2015.000	46.78	-0.34	46.44	74.00	-27.56	peak	
6	2015.000	30.65	-0.34	30.31	54.00	-23.69	AVG	
7	2460.000	43.18	0.23	43.41	74.00	-30.59	peak	
8	2460.000	28.67	0.23	28.90	54.00	-25.10	AVG	
9	5635.000	39.48	9.42	48.90	74.00	-25.10	peak	
10	5635.000	25.14	9.42	34.56	54.00	-19.44	AVG	
11	5985.000	40.70	9.99	50.69	74.00	-23.31	peak	
12	5985.000	25.69	9.99	35.68	54.00	-18.32	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Horizontal

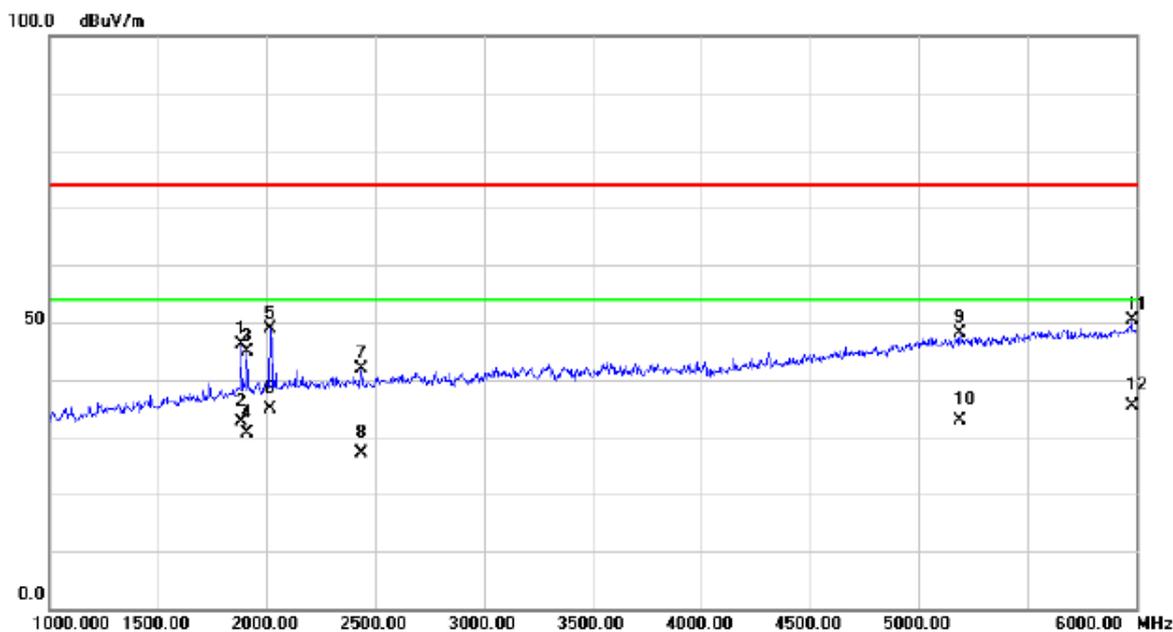


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1880.000	47.23	-1.20	46.03	74.00	-27.97	peak	
2		1880.000	33.85	-1.20	32.65	54.00	-21.35	AVG	
3		1910.000	45.94	-0.99	44.95	74.00	-29.05	peak	
4		1910.000	31.52	-0.99	30.53	54.00	-23.47	AVG	
5		2015.000	49.17	-0.34	48.83	74.00	-25.17	peak	
6		2015.000	35.10	-0.34	34.76	54.00	-19.24	AVG	
7		2435.000	41.58	0.20	41.78	74.00	-32.22	peak	
8		2435.000	26.84	0.20	27.04	54.00	-26.96	AVG	
9		5190.000	39.55	8.56	48.11	74.00	-25.89	peak	
10		5190.000	24.31	8.56	32.87	54.00	-21.13	AVG	
11		5980.000	40.32	9.98	50.30	74.00	-23.70	peak	
12	*	5980.000	25.41	9.98	35.39	54.00	-18.61	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + Speaker + Camera on – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Vertical

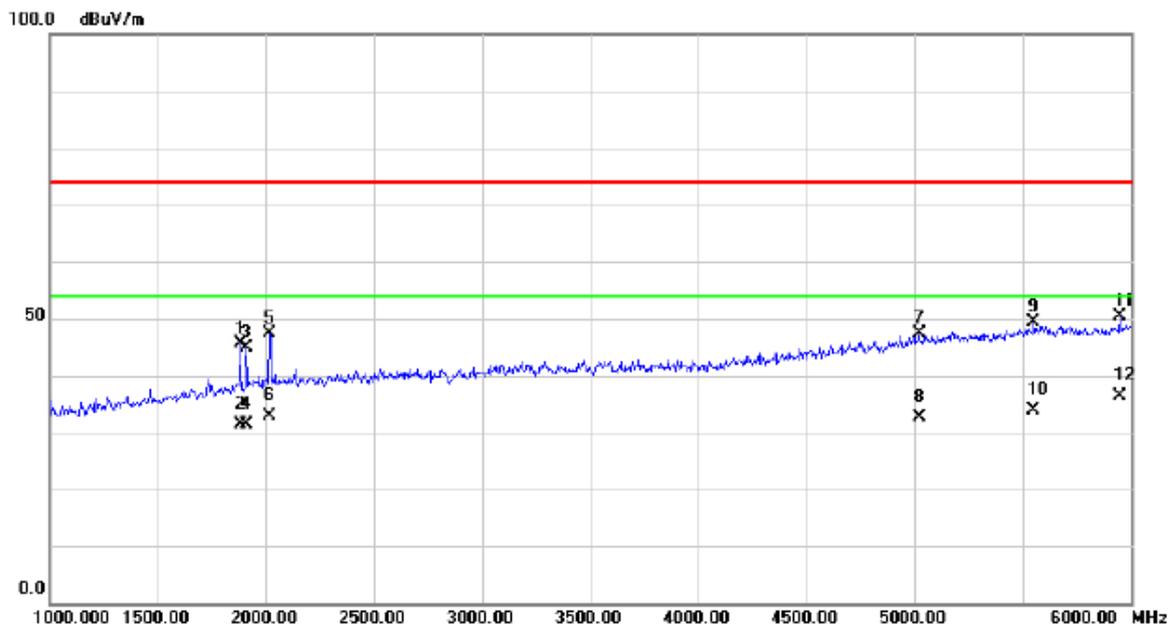


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1880.000	46.77	-1.20	45.57	74.00	-28.43	peak	
2		1880.000	32.56	-1.20	31.36	54.00	-22.64	AVG	
3		1910.000	45.98	-0.99	44.99	74.00	-29.01	peak	
4		1910.000	32.43	-0.99	31.44	54.00	-22.56	AVG	
5		2015.000	47.63	-0.34	47.29	74.00	-26.71	peak	
6		2015.000	33.26	-0.34	32.92	54.00	-21.08	AVG	
7		5020.000	39.07	8.19	47.26	74.00	-26.74	peak	
8		5020.000	24.32	8.19	32.51	54.00	-21.49	AVG	
9		5550.000	40.06	9.29	49.35	74.00	-24.65	peak	
10		5550.000	24.65	9.29	33.94	54.00	-20.06	AVG	
11		5950.000	40.42	9.93	50.35	74.00	-23.65	peak	
12	*	5950.000	26.43	9.93	36.36	54.00	-17.64	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + Speaker + Camera on – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Horizontal

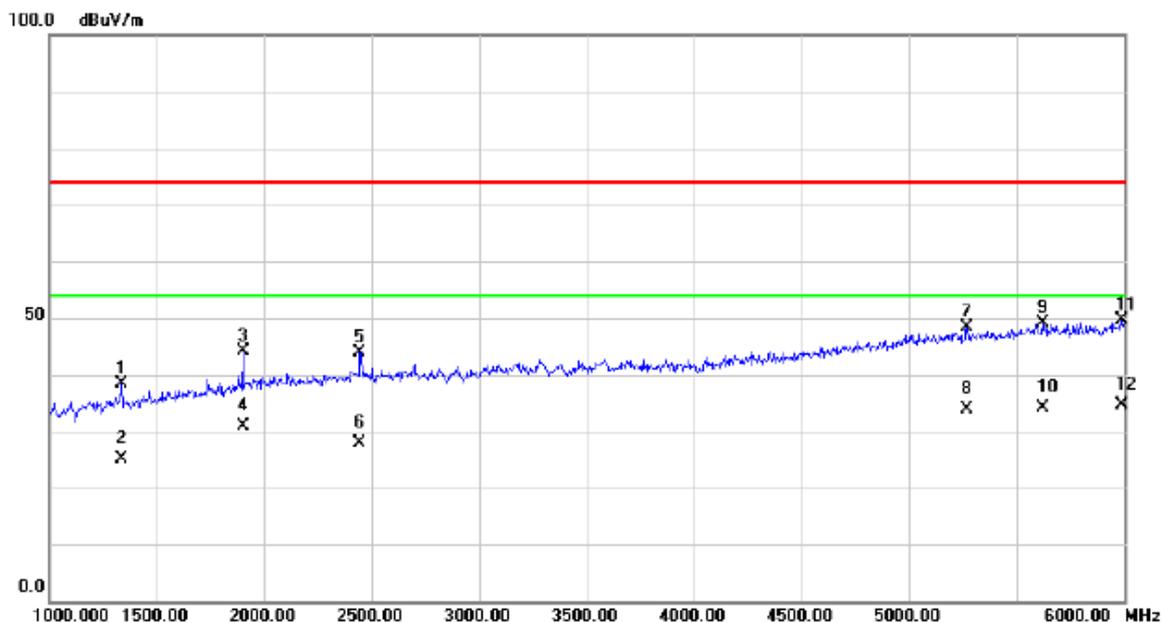


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1335.000	43.31	-5.00	38.31	74.00	-35.69	peak	
2	1335.000	30.24	-5.00	25.24	54.00	-28.76	AVG	
3	1900.000	45.07	-1.06	44.01	74.00	-29.99	peak	
4	1900.000	31.97	-1.06	30.91	54.00	-23.09	AVG	
5	2445.000	43.72	0.21	43.93	74.00	-30.07	peak	
6	2445.000	27.65	0.21	27.86	54.00	-26.14	AVG	
7	5270.000	39.65	8.72	48.37	74.00	-25.63	peak	
8	5270.000	25.14	8.72	33.86	54.00	-20.14	AVG	
9	5620.000	39.64	9.40	49.04	74.00	-24.96	peak	
10	5620.000	24.75	9.40	34.15	54.00	-19.85	AVG	
11	5990.000	39.69	9.99	49.68	74.00	-24.32	peak	
12 *	5990.000	24.62	9.99	34.61	54.00	-19.39	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on – Adapter: HK / Desktop (HWHKA5E32707819)	Polarization:	Vertical

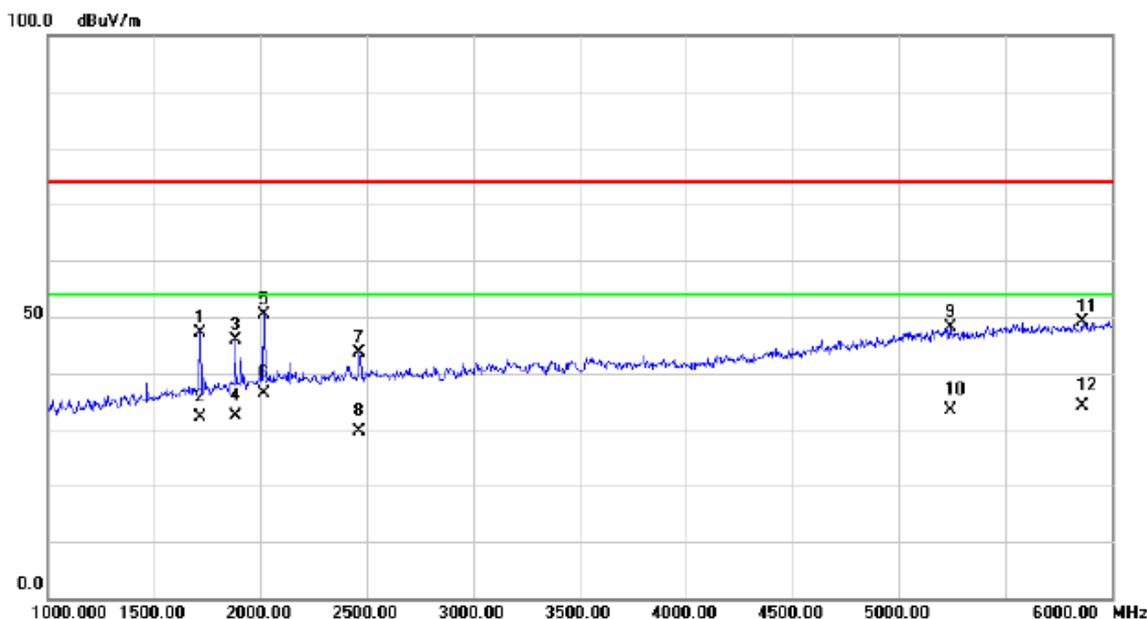


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1715.000	49.52	-2.36	47.16	74.00	-26.84	peak	
2		1715.000	34.52	-2.36	32.16	54.00	-21.84	AVG	
3		1880.000	47.11	-1.20	45.91	74.00	-28.09	peak	
4		1880.000	33.68	-1.20	32.48	54.00	-21.52	AVG	
5		2015.000	50.61	-0.34	50.27	74.00	-23.73	peak	
6	*	2015.000	36.77	-0.34	36.43	54.00	-17.57	AVG	
7		2465.000	43.34	0.23	43.57	74.00	-30.43	peak	
8		2465.000	29.34	0.23	29.57	54.00	-24.43	AVG	
9		5240.000	39.43	8.66	48.09	74.00	-25.91	peak	
10		5240.000	24.62	8.66	33.28	54.00	-20.72	AVG	
11		5860.000	39.45	9.79	49.24	74.00	-24.76	peak	
12		5860.000	24.23	9.79	34.02	54.00	-19.98	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on – Adapter: HK / Desktop (HWHKA5E32707819)	Polarization:	Horizontal

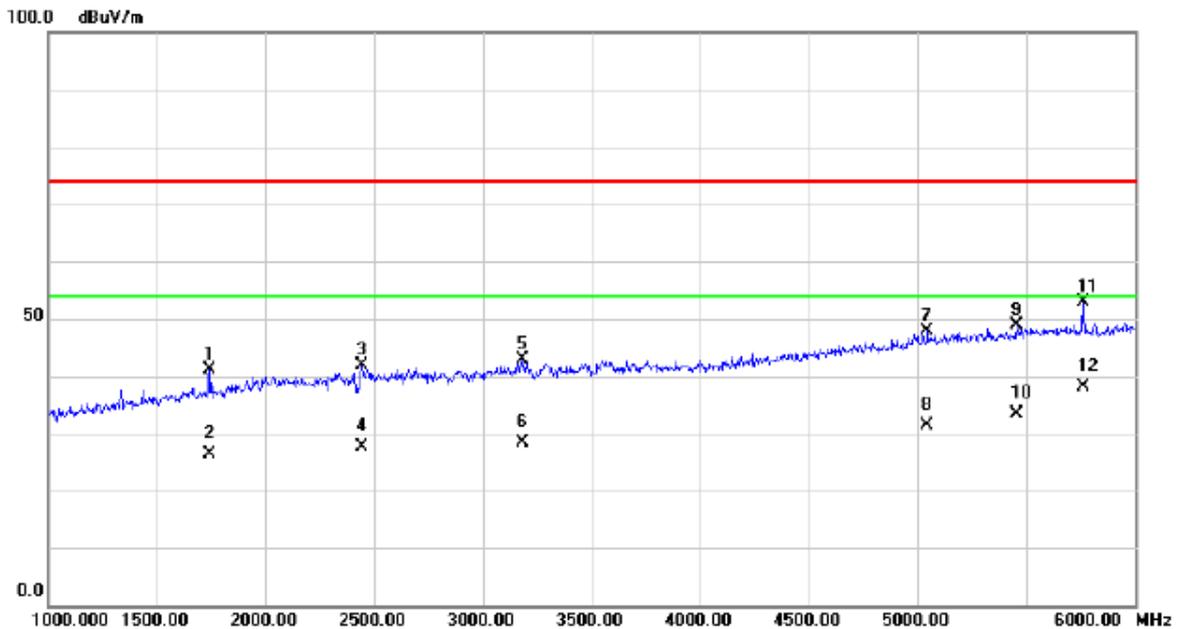


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1745.000	43.27	-2.15	41.12	74.00	-32.88	peak	
2		1745.000	28.42	-2.15	26.27	54.00	-27.73	AVG	
3		2445.000	41.67	0.21	41.88	74.00	-32.12	peak	
4		2445.000	27.35	0.21	27.56	54.00	-26.44	AVG	
5		3185.000	41.04	1.90	42.94	74.00	-31.06	peak	
6		3185.000	26.58	1.90	28.48	54.00	-25.52	AVG	
7		5045.000	39.61	8.24	47.85	74.00	-26.15	peak	
8		5045.000	23.14	8.24	31.38	54.00	-22.62	AVG	
9		5455.000	39.85	9.11	48.96	74.00	-25.04	peak	
10		5455.000	24.26	9.11	33.37	54.00	-20.63	AVG	
11		5760.000	43.26	9.63	52.89	74.00	-21.11	peak	
12	*	5760.000	28.61	9.63	38.24	54.00	-15.76	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	USB R/W + Idle + 5G wifi + BT + GPS + earphone	Polarization:	Vertical

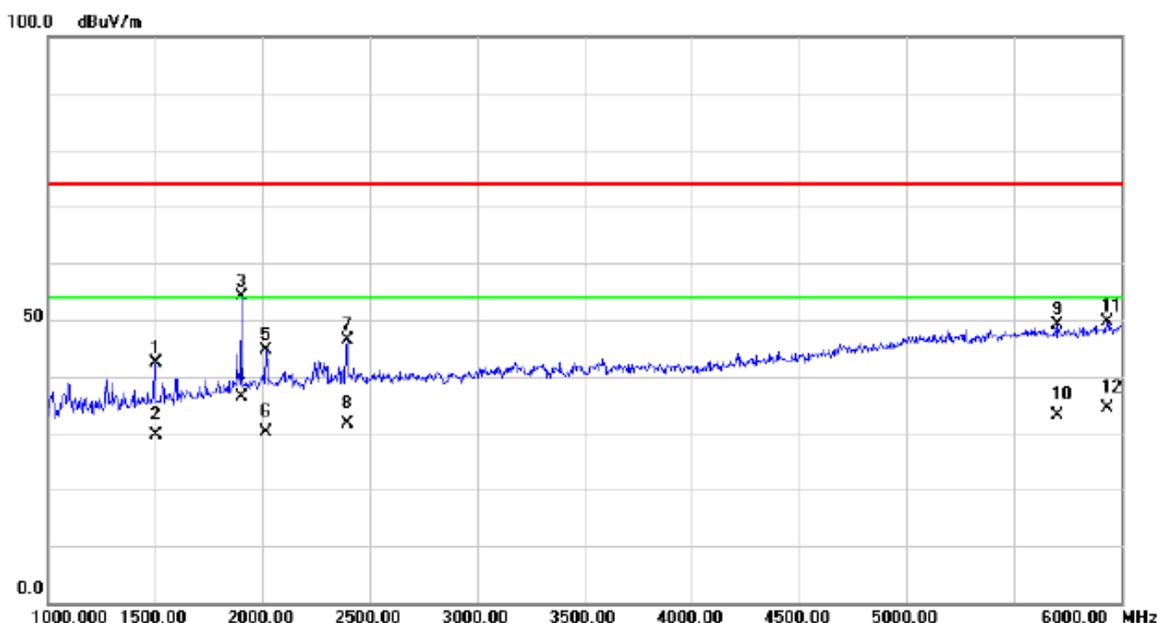


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1500.000	46.30	-3.86	42.44	74.00	-31.56	peak	
2		1500.000	33.54	-3.86	29.68	54.00	-24.32	AVG	
3		1900.000	55.28	-1.06	54.22	74.00	-19.78	peak	
4	*	1900.000	37.56	-1.06	36.50	54.00	-17.50	AVG	
5		2015.000	44.94	-0.34	44.60	74.00	-29.40	peak	
6		2015.000	30.56	-0.34	30.22	54.00	-23.78	AVG	
7		2395.000	46.24	0.15	46.39	74.00	-27.61	peak	
8		2395.000	31.52	0.15	31.67	54.00	-22.33	AVG	
9		5705.000	39.53	9.54	49.07	74.00	-24.93	peak	
10		5705.000	23.67	9.54	33.21	54.00	-20.79	AVG	
11		5935.000	39.60	9.91	49.51	74.00	-24.49	peak	
12		5935.000	24.55	9.91	34.46	54.00	-19.54	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	USB R/W + Idle + 5G wifi + BT + GPS + earphone	Polarization:	Horizontal

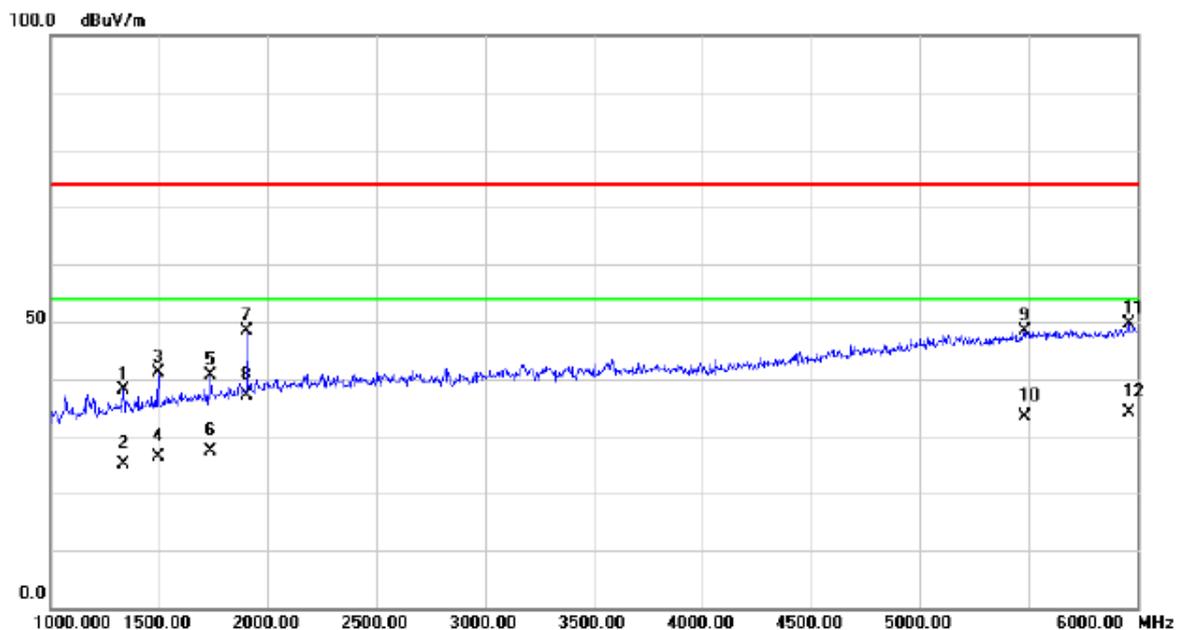


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1335.000	43.07	-5.00	38.07	74.00	-35.93	peak	
2	1335.000	30.10	-5.00	25.10	54.00	-28.90	AVG	
3	1495.000	44.96	-3.89	41.07	74.00	-32.93	peak	
4	1495.000	30.26	-3.89	26.37	54.00	-27.63	AVG	
5	1735.000	42.91	-2.21	40.70	74.00	-33.30	peak	
6	1735.000	29.53	-2.21	27.32	54.00	-26.68	AVG	
7	1905.000	49.48	-1.02	48.46	74.00	-25.54	peak	
8 *	1905.000	38.12	-1.02	37.10	54.00	-16.90	AVG	
9	5480.000	39.19	9.16	48.35	74.00	-25.65	peak	
10	5480.000	24.32	9.16	33.48	54.00	-20.52	AVG	
11	5960.000	39.60	9.95	49.55	74.00	-24.45	peak	
12	5960.000	24.13	9.95	34.08	54.00	-19.92	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (B67432F1E00013)	Polarization:	Vertical

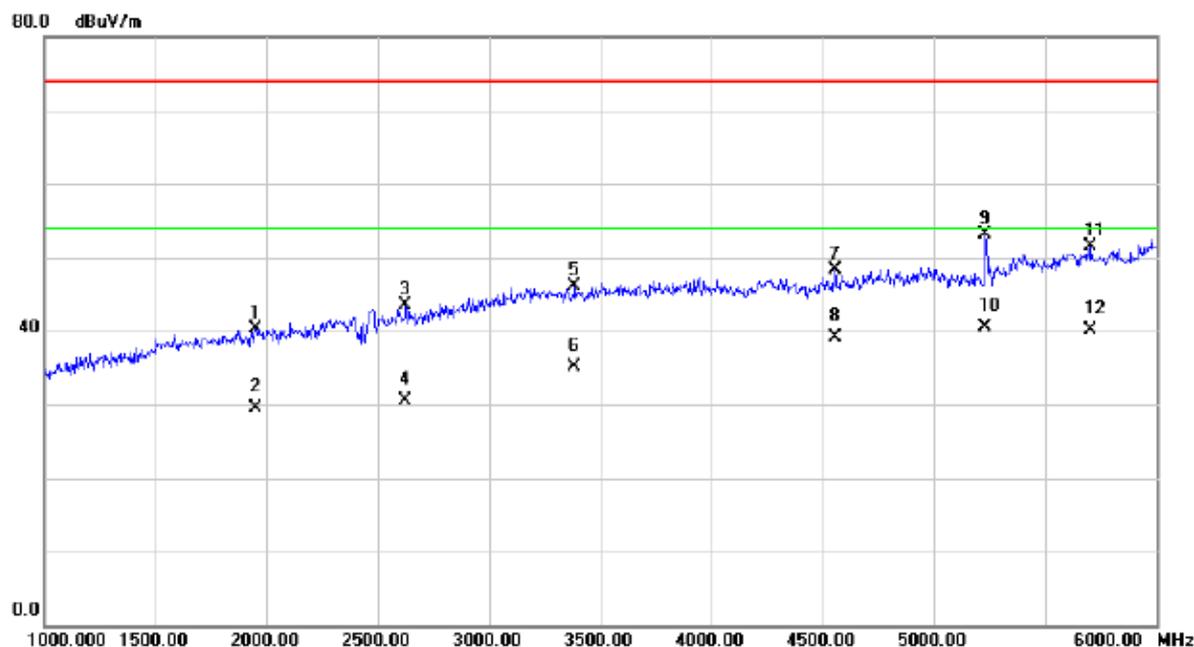


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1950.000	42.56	-2.18	40.38	74.00	-33.62	peak	
2		1950.000	31.62	-2.18	29.44	54.00	-24.56	AVG	
3		2625.000	43.46	0.01	43.47	74.00	-30.53	peak	
4		2625.000	30.57	0.01	30.58	54.00	-23.42	AVG	
5		3385.000	42.44	3.64	46.08	74.00	-27.92	peak	
6		3385.000	31.44	3.64	35.08	54.00	-18.92	AVG	
7		4555.000	42.40	5.83	48.23	74.00	-25.77	peak	
8		4555.000	33.25	5.83	39.08	54.00	-14.92	AVG	
9		5230.000	45.44	7.76	53.20	74.00	-20.80	peak	
10	*	5230.000	32.67	7.76	40.43	54.00	-13.57	AVG	
11		5705.000	41.66	9.89	51.55	74.00	-22.45	peak	
12		5705.000	30.27	9.89	40.16	54.00	-13.84	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (B67432F1E00013)	Polarization:	Horizontal

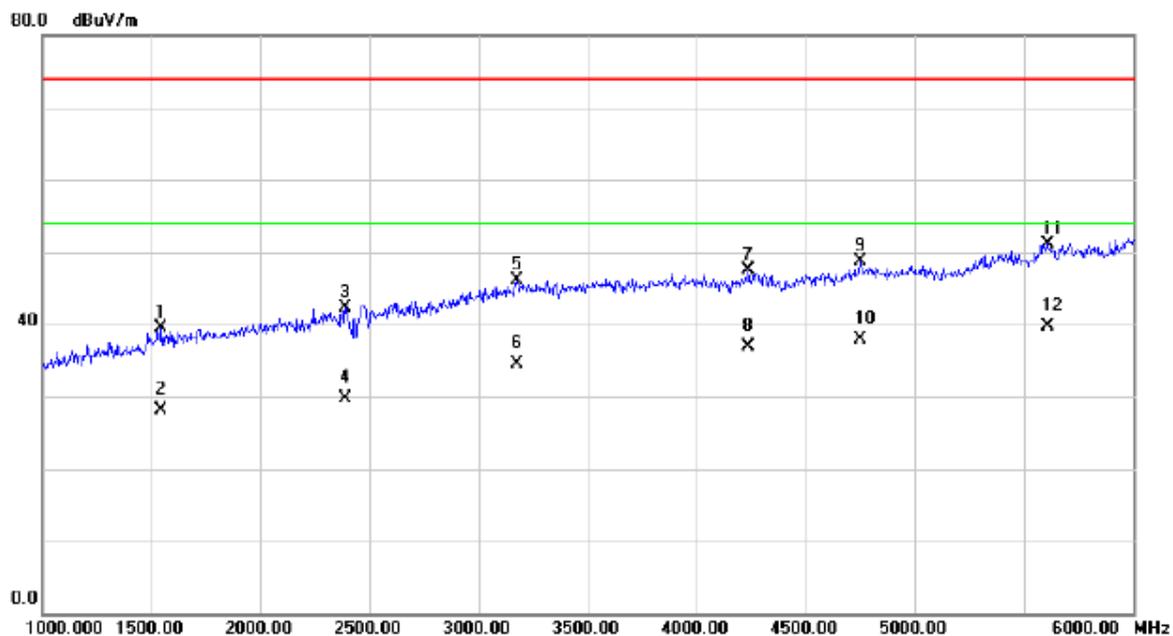


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1545.000	43.93	-4.48	39.45	74.00	-34.55	peak	
2		1545.000	32.59	-4.48	28.11	54.00	-25.89	AVG	
3		2390.000	43.20	-0.96	42.24	74.00	-31.76	peak	
4		2390.000	30.74	-0.96	29.78	54.00	-24.22	AVG	
5		3175.000	43.38	2.80	46.18	74.00	-27.82	peak	
6		3175.000	31.62	2.80	34.42	54.00	-19.58	AVG	
7		4235.000	42.13	5.28	47.41	74.00	-26.59	peak	
8		4235.000	31.55	5.28	36.83	54.00	-17.17	AVG	
9		4750.000	42.48	6.27	48.75	74.00	-25.25	peak	
10		4750.000	31.57	6.27	37.84	54.00	-16.16	AVG	
11		5610.000	41.74	9.40	51.14	74.00	-22.86	peak	
12	*	5610.000	30.24	9.40	39.64	54.00	-14.36	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on – Adapter: HK / Desktop (H67416F6100005)	Polarization:	Vertical

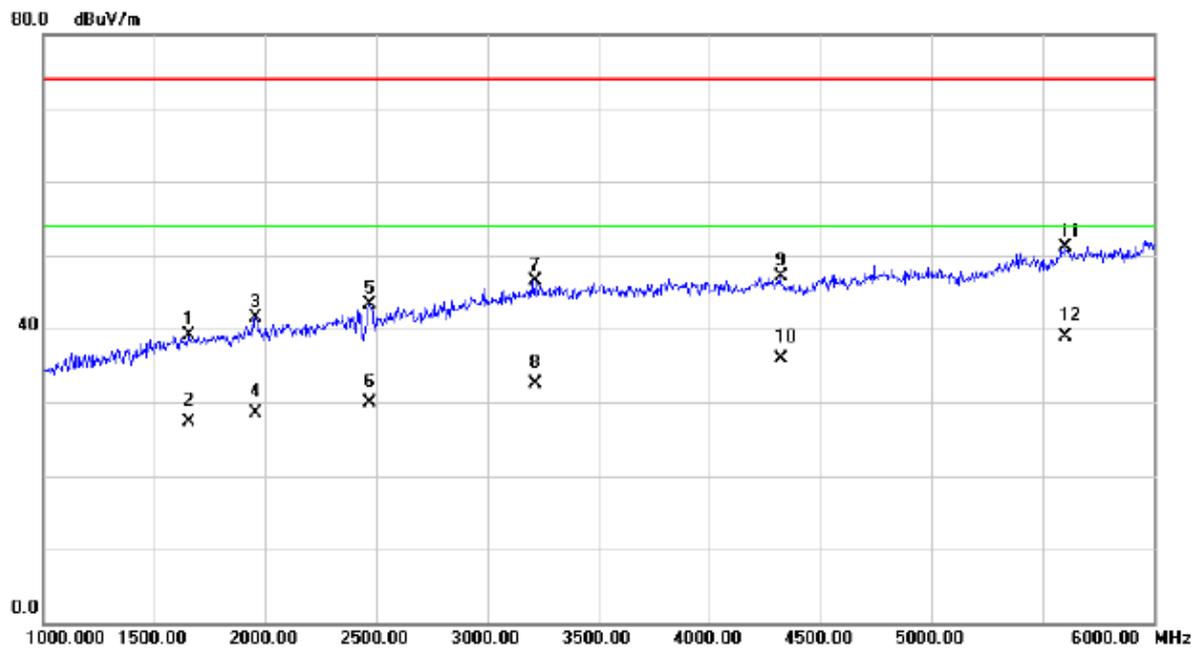


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1655.000	42.98	-3.85	39.13	74.00	-34.87	peak	
2	1655.000	31.25	-3.85	27.40	54.00	-26.60	AVG	
3	1955.000	43.66	-2.15	41.51	74.00	-32.49	peak	
4	1955.000	30.64	-2.15	28.49	54.00	-25.51	AVG	
5	2470.000	44.05	-0.76	43.29	74.00	-30.71	peak	
6	2470.000	30.61	-0.76	29.85	54.00	-24.15	AVG	
7	3215.000	43.58	2.96	46.54	74.00	-27.46	peak	
8	3215.000	29.57	2.96	32.53	54.00	-21.47	AVG	
9	4320.000	41.67	5.41	47.08	74.00	-26.92	peak	
10	4320.000	30.51	5.41	35.92	54.00	-18.08	AVG	
11	5600.000	41.76	9.36	51.12	74.00	-22.88	peak	
12 *	5600.000	29.54	9.36	38.90	54.00	-15.10	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on – Adapter: HK / Desktop (H67416F6100005)	Polarization:	Horizontal

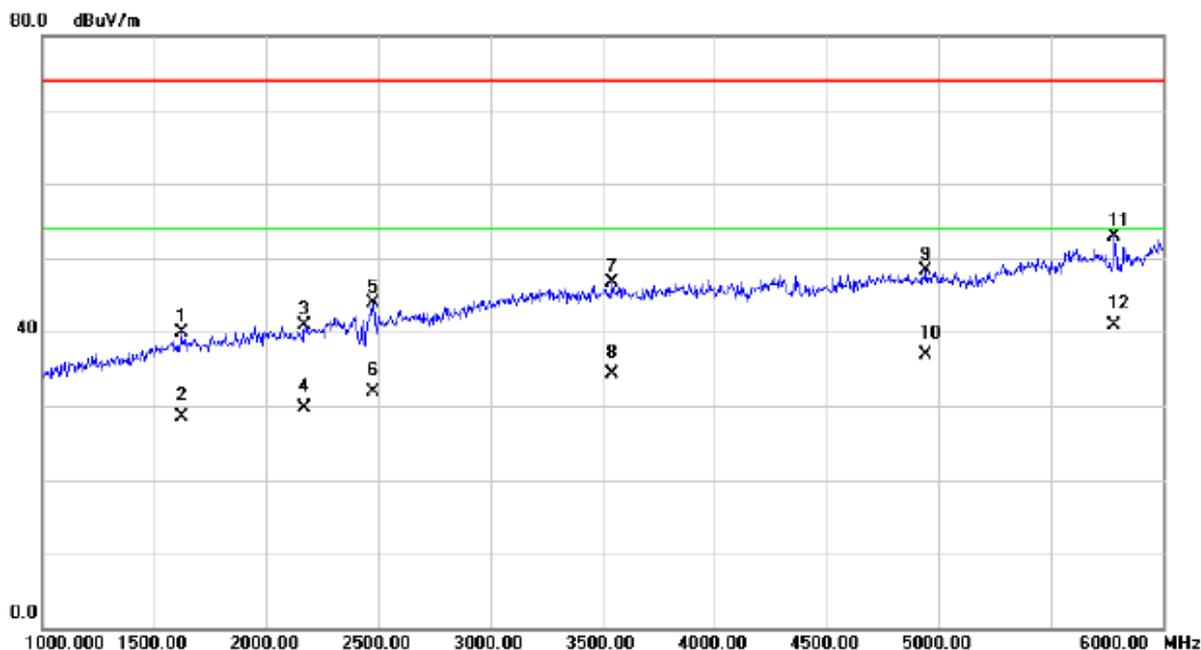


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1620.000	43.92	-4.06	39.86	74.00	-34.14	peak	
2		1620.000	32.54	-4.06	28.48	54.00	-25.52	AVG	
3		2170.000	42.38	-1.49	40.89	74.00	-33.11	peak	
4		2170.000	31.12	-1.49	29.63	54.00	-24.37	AVG	
5		2475.000	44.67	-0.75	43.92	74.00	-30.08	peak	
6		2475.000	32.57	-0.75	31.82	54.00	-22.18	AVG	
7		3545.000	42.56	4.19	46.75	74.00	-27.25	peak	
8		3545.000	30.21	4.19	34.40	54.00	-19.60	AVG	
9		4945.000	41.53	6.70	48.23	74.00	-25.77	peak	
10		4945.000	30.15	6.70	36.85	54.00	-17.15	AVG	
11		5780.000	42.67	10.27	52.94	74.00	-21.06	peak	
12	*	5780.000	30.57	10.27	40.84	54.00	-13.16	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on – Adapter: PHITEK / Desktop (P67401F5W00017)	Polarization:	Vertical

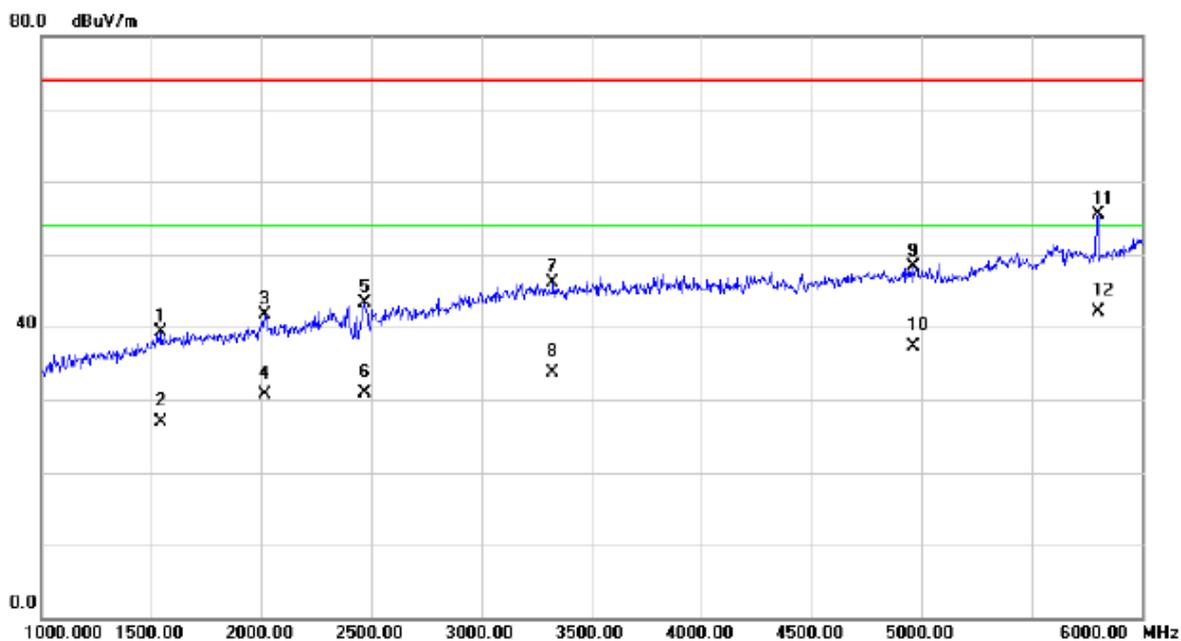


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1540.000	43.71	-4.50	39.21	74.00	-34.79	peak	
2		1540.000	31.46	-4.50	26.96	54.00	-27.04	AVG	
3		2015.000	43.51	-1.86	41.65	74.00	-32.35	peak	
4		2015.000	32.61	-1.86	30.75	54.00	-23.25	AVG	
5		2470.000	44.06	-0.76	43.30	74.00	-30.70	peak	
6		2470.000	31.62	-0.76	30.86	54.00	-23.14	AVG	
7		3325.000	42.67	3.40	46.07	74.00	-27.93	peak	
8		3325.000	30.26	3.40	33.66	54.00	-20.34	AVG	
9		4960.000	41.54	6.74	48.28	74.00	-25.72	peak	
10		4960.000	30.61	6.74	37.35	54.00	-16.65	AVG	
11		5800.000	45.20	10.38	55.58	74.00	-18.42	peak	
12	*	5800.000	31.72	10.38	42.10	54.00	-11.90	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (P67401F5W00017)	Polarization:	Horizontal

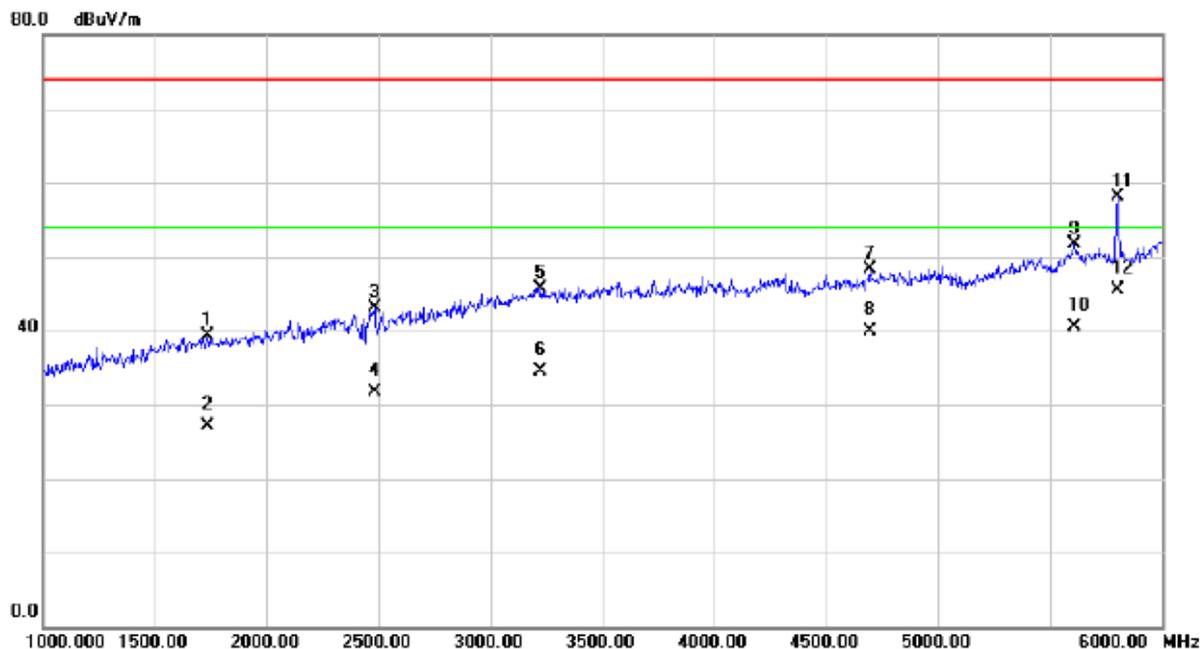


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1735.000	42.73	-3.40	39.33	74.00	-34.67	peak	
2		1735.000	30.57	-3.40	27.17	54.00	-26.83	AVG	
3		2480.000	43.87	-0.74	43.13	74.00	-30.87	peak	
4		2480.000	32.51	-0.74	31.77	54.00	-22.23	AVG	
5		3225.000	42.80	3.00	45.80	74.00	-28.20	peak	
6		3225.000	31.46	3.00	34.46	54.00	-19.54	AVG	
7		4695.000	42.20	6.15	48.35	74.00	-25.65	peak	
8		4695.000	33.69	6.15	39.84	54.00	-14.16	AVG	
9		5610.000	42.28	9.40	51.68	74.00	-22.32	peak	
10		5610.000	31.14	9.40	40.54	54.00	-13.46	AVG	
11		5800.000	47.79	10.38	58.17	74.00	-15.83	peak	
12	*	5800.000	35.17	10.38	45.55	54.00	-8.45	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on – Adapter: YINJU / Desktop (Y67401F3G00038)	Polarization:	Vertical

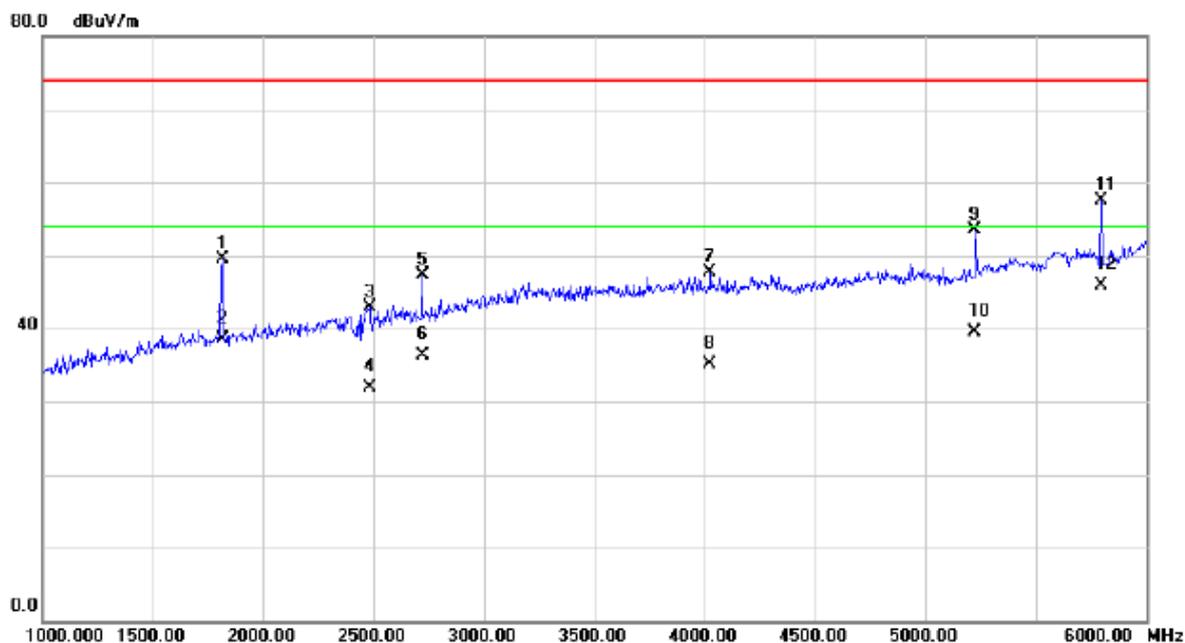


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1815.000	52.46	-2.95	49.51	74.00	-24.49	peak	
2		1815.000	41.55	-2.95	38.60	54.00	-15.40	AVG	
3		2480.000	43.67	-0.74	42.93	74.00	-31.07	peak	
4		2480.000	32.62	-0.74	31.88	54.00	-22.12	AVG	
5		2720.000	46.70	0.54	47.24	74.00	-26.76	peak	
6		2720.000	35.67	0.54	36.21	54.00	-17.79	AVG	
7		4025.000	42.75	4.93	47.68	74.00	-26.32	peak	
8		4025.000	30.25	4.93	35.18	54.00	-18.82	AVG	
9		5225.000	45.70	7.74	53.44	74.00	-20.56	peak	
10		5225.000	31.67	7.74	39.41	54.00	-14.59	AVG	
11		5795.000	47.16	10.35	57.51	74.00	-16.49	peak	
12	*	5795.000	35.61	10.35	45.96	54.00	-8.04	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on – Adapter: YINJU / Desktop (Y67401F3G00038)	Polarization:	Horizontal

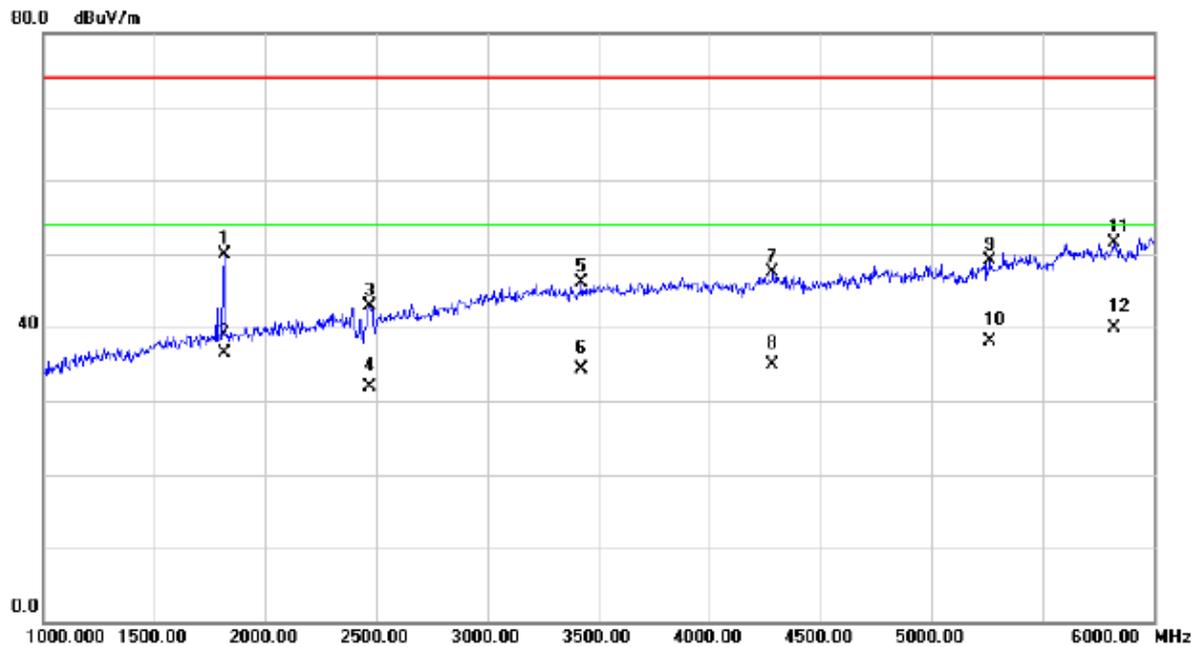


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1815.000	52.88	-2.95	49.93	74.00	-24.07	peak	
2	1815.000	39.54	-2.95	36.59	54.00	-17.41	AVG	
3	2470.000	43.63	-0.76	42.87	74.00	-31.13	peak	
4	2470.000	32.61	-0.76	31.85	54.00	-22.15	AVG	
5	3425.000	42.27	3.80	46.07	74.00	-27.93	peak	
6	3425.000	30.51	3.80	34.31	54.00	-19.69	AVG	
7	4285.000	42.13	5.36	47.49	74.00	-26.51	peak	
8	4285.000	29.54	5.36	34.90	54.00	-19.10	AVG	
9	5260.000	41.20	7.88	49.08	74.00	-24.92	peak	
10	5260.000	30.17	7.88	38.05	54.00	-15.95	AVG	
11	5820.000	40.96	10.48	51.44	74.00	-22.56	peak	
12 *	5820.000	29.41	10.48	39.89	54.00	-14.11	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Vertical

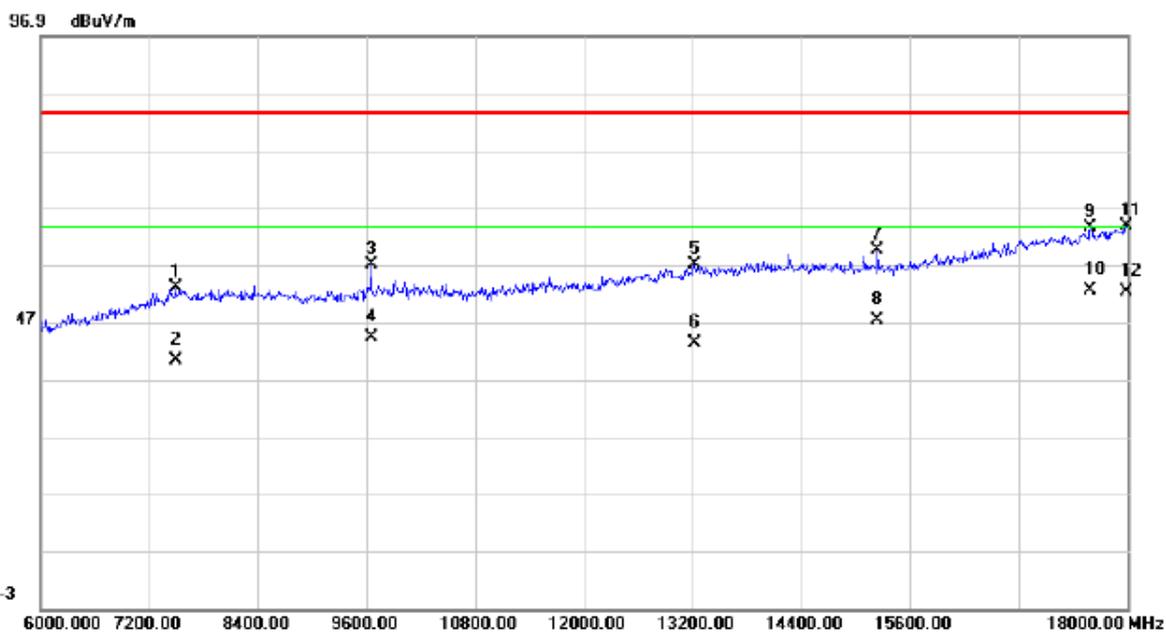


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7488.000	36.45	16.51	52.96	83.50	-30.54	peak	
2	7488.000	23.74	16.51	40.25	63.50	-23.25	AVG	
3	9648.000	39.04	18.10	57.14	83.50	-26.36	peak	
4	9648.000	26.15	18.10	44.25	63.50	-19.25	AVG	
5	13224.00	33.23	23.68	56.91	83.50	-26.59	peak	
6	13224.00	19.57	23.68	43.25	63.50	-20.25	AVG	
7	15240.00	35.45	23.98	59.43	83.50	-24.07	peak	
8	15240.00	23.30	23.98	47.28	63.50	-16.22	AVG	
9	17592.00	32.89	30.56	63.45	83.50	-20.05	peak	
10 *	17592.00	22.05	30.56	52.61	63.50	-10.89	AVG	
11	17988.00	32.10	31.60	63.70	83.50	-19.80	peak	
12	17988.00	20.63	31.60	52.23	63.50	-11.27	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Horizontal

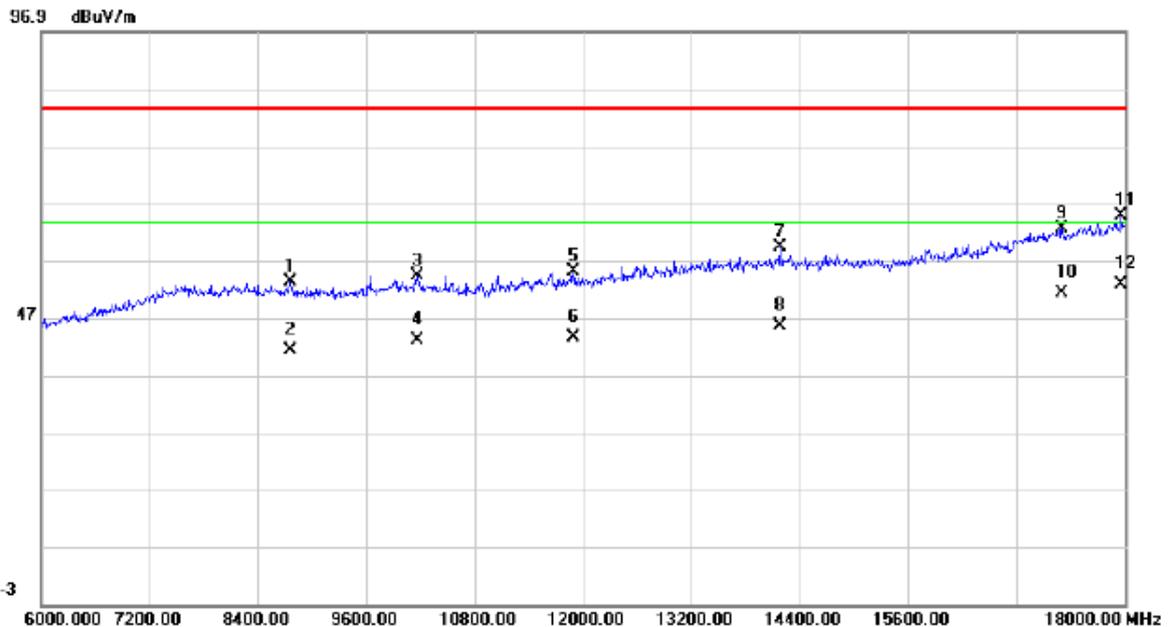


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	8760.00	36.22	17.11	53.33	83.50	-30.17	peak	
2	8760.00	24.14	17.11	41.25	63.50	-22.25	AVG	
3	10164.00	35.82	18.52	54.34	83.50	-29.16	peak	
4	10164.00	24.50	18.52	43.02	63.50	-20.48	AVG	
5	11892.00	35.14	19.99	55.13	83.50	-28.37	peak	
6	11892.00	23.44	19.99	43.43	63.50	-20.07	AVG	
7	14184.00	34.56	24.62	59.18	83.50	-24.32	peak	
8	14184.00	21.00	24.62	45.62	63.50	-17.88	AVG	
9	17304.00	32.75	29.76	62.51	83.50	-20.99	peak	
10	17304.00	21.47	29.76	51.23	63.50	-12.27	AVG	
11	17964.00	33.16	31.54	64.70	83.50	-18.80	peak	
12 *	17964.00	21.15	31.54	52.69	63.50	-10.81	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Vertical

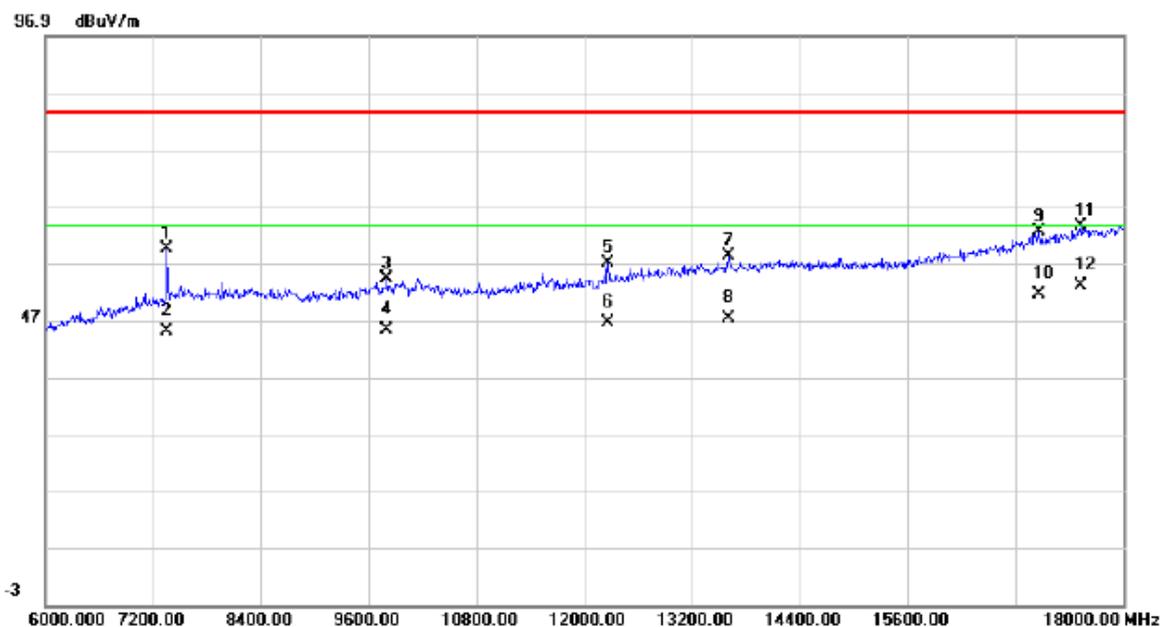


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7356.000	43.55	15.92	59.47	83.50	-24.03	peak	
2		7356.000	29.10	15.92	45.02	63.50	-18.48	AVG	
3		9804.000	36.08	18.32	54.40	83.50	-29.10	peak	
4		9804.000	26.93	18.32	45.25	63.50	-18.25	AVG	
5		12264.00	36.29	20.80	57.09	83.50	-26.41	peak	
6		12264.00	25.72	20.80	46.52	63.50	-16.98	AVG	
7		13608.00	33.81	24.39	58.20	83.50	-25.30	peak	
8		13608.00	22.86	24.39	47.25	63.50	-16.25	AVG	
9		17064.00	33.55	29.08	62.63	83.50	-20.87	peak	
10		17064.00	22.54	29.08	51.62	63.50	-11.88	AVG	
11		17532.00	33.03	30.41	63.44	83.50	-20.06	peak	
12	*	17532.00	22.60	30.41	53.01	63.50	-10.49	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Horizontal

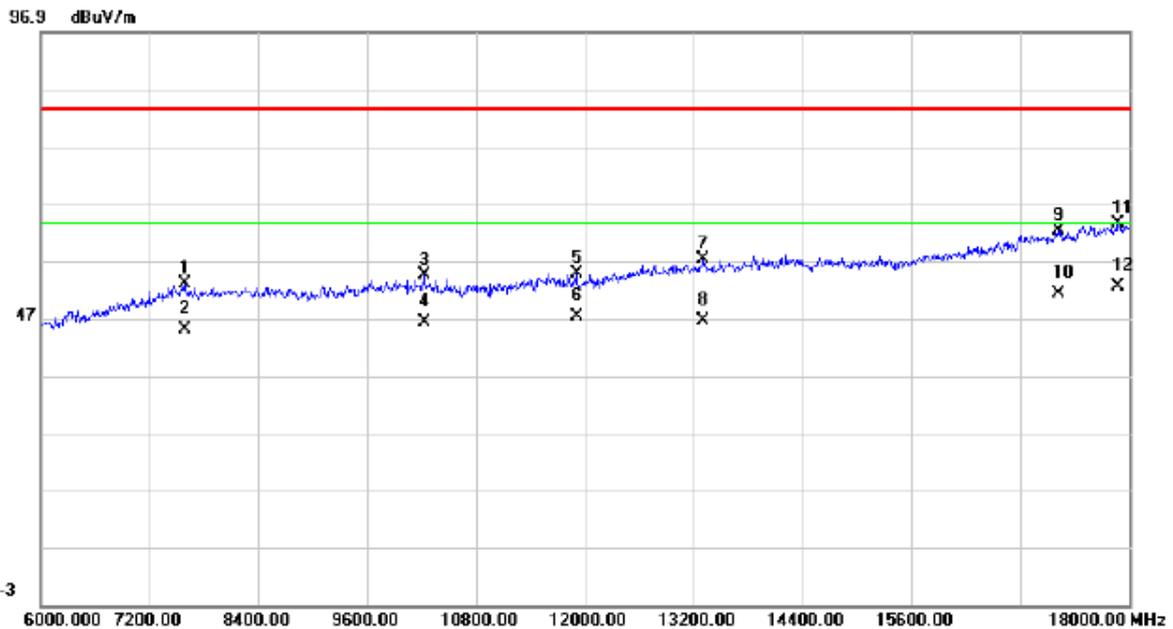


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7584.000	36.42	16.62	53.04	83.50	-30.46	peak	
2		7584.000	28.43	16.62	45.05	63.50	-18.45	AVG	
3		10224.00	35.95	18.52	54.47	83.50	-29.03	peak	
4		10224.00	27.73	18.52	46.25	63.50	-17.25	AVG	
5		11904.00	34.74	19.99	54.73	83.50	-28.77	peak	
6		11904.00	27.26	19.99	47.25	63.50	-16.25	AVG	
7		13308.00	33.51	23.87	57.38	83.50	-26.12	peak	
8		13308.00	22.66	23.87	46.53	63.50	-16.97	AVG	
9		17220.00	32.74	29.52	62.26	83.50	-21.24	peak	
10		17220.00	21.84	29.52	51.36	63.50	-12.14	AVG	
11		17880.00	32.13	31.32	63.45	83.50	-20.05	peak	
12	*	17880.00	21.15	31.32	52.47	63.50	-11.03	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on - Adapter: BYD / Desktop (B67432F1E00013)	Polarization:	Vertical

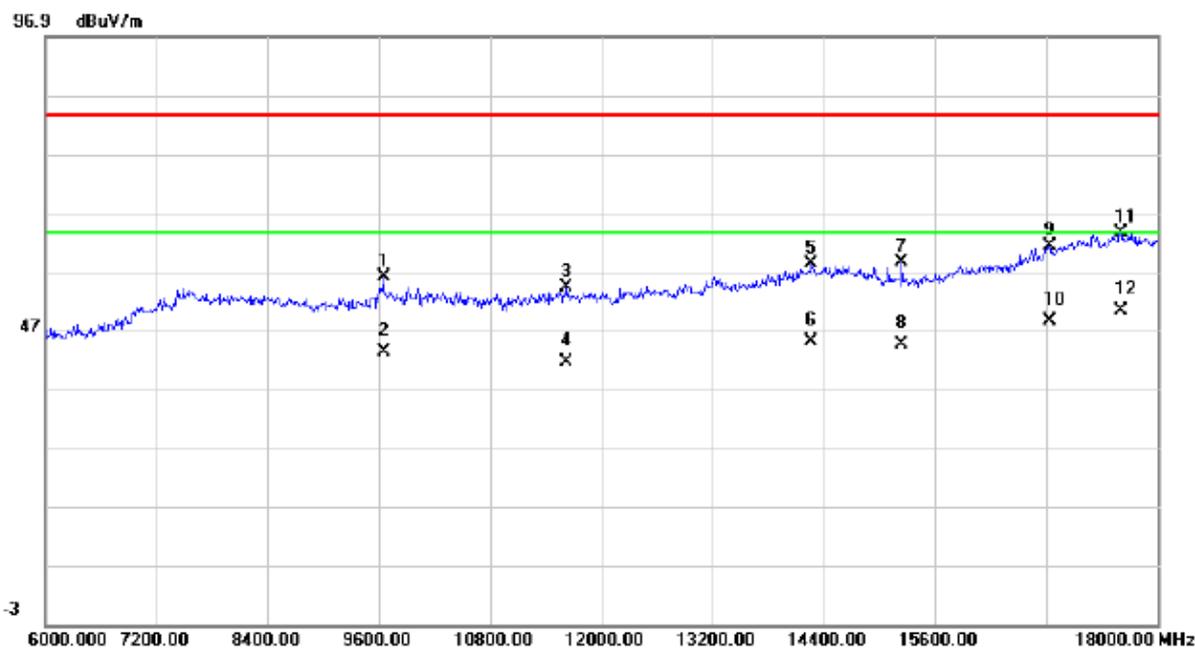


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		9648.000	38.04	18.10	56.14	83.50	-27.36	peak	
2		9648.000	25.13	18.10	43.23	63.50	-20.27	AVG	
3		11628.00	34.07	20.15	54.22	83.50	-29.28	peak	
4		11628.00	21.44	20.15	41.59	63.50	-21.91	AVG	
5		14268.00	33.65	24.55	58.20	83.50	-25.30	peak	
6		14268.00	20.56	24.55	45.11	63.50	-18.39	AVG	
7		15240.00	34.45	23.98	58.43	83.50	-25.07	peak	
8		15240.00	20.47	23.98	44.45	63.50	-19.05	AVG	
9		16836.00	33.03	28.16	61.19	83.50	-22.31	peak	
10		16836.00	20.32	28.16	48.48	63.50	-15.02	AVG	
11		17604.00	32.91	30.59	63.50	83.50	-20.00	peak	
12	*	17604.00	19.58	30.59	50.17	63.50	-13.33	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 2.4G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (B67432F1E00013)	Polarization:	Horizontal

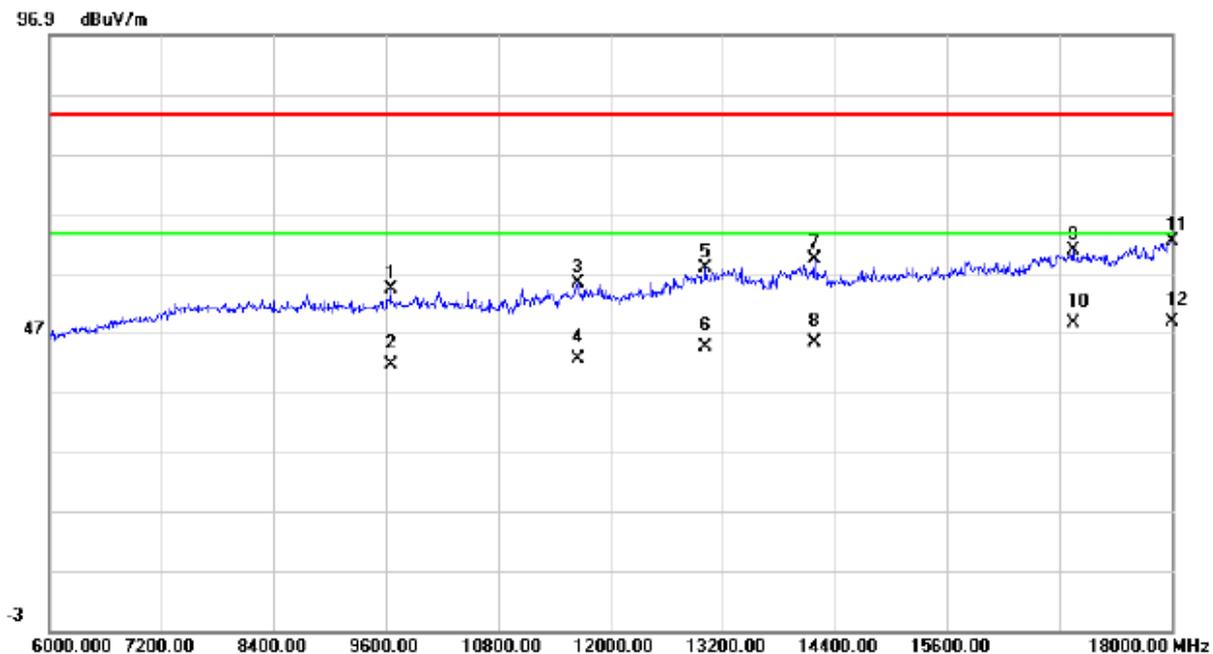


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		9648.000	36.12	18.10	54.22	83.50	-29.28	peak	
2		9648.000	23.45	18.10	41.55	63.50	-21.95	AVG	
3		11652.00	35.26	20.14	55.40	83.50	-28.10	peak	
4		11652.00	22.41	20.14	42.55	63.50	-20.95	AVG	
5		13020.00	34.57	23.25	57.82	83.50	-25.68	peak	
6		13020.00	21.35	23.25	44.60	63.50	-18.90	AVG	
7		14184.00	34.56	24.62	59.18	83.50	-24.32	peak	
8		14184.00	20.72	24.62	45.34	63.50	-18.16	AVG	
9		16944.00	32.07	28.64	60.71	83.50	-22.79	peak	
10		16944.00	20.01	28.64	48.65	63.50	-14.85	AVG	
11		18000.00	30.56	31.63	62.19	83.50	-21.31	peak	
12	*	18000.00	17.17	31.63	48.80	63.50	-14.70	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (B67432F1E00013)	Polarization:	Vertical

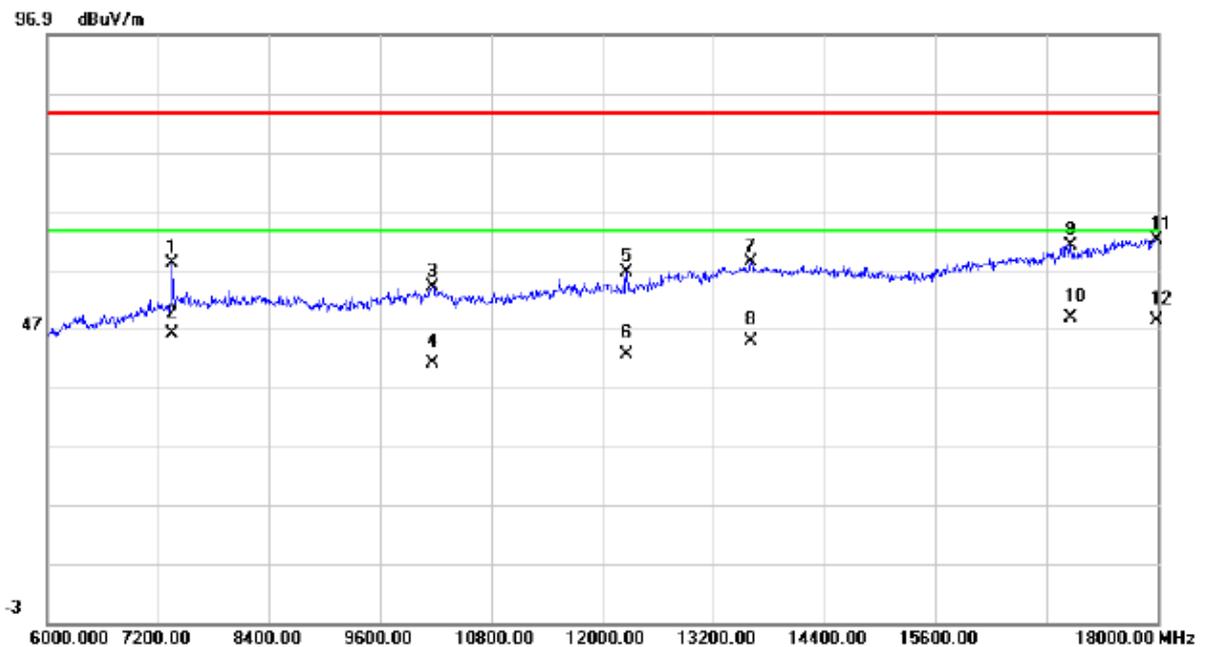


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7356.000	42.05	15.92	57.97	83.50	-25.53	peak	
2		7356.000	30.10	15.92	46.02	63.50	-17.48	AVG	
3		10164.00	35.56	18.52	54.08	83.50	-29.42	peak	
4		10164.00	22.42	18.52	40.94	63.50	-22.56	AVG	
5		12264.00	35.79	20.80	56.59	83.50	-26.91	peak	
6		12264.00	21.65	20.80	42.45	63.50	-21.05	AVG	
7		13608.00	33.81	24.39	58.20	83.50	-25.30	peak	
8		13608.00	20.44	24.39	44.83	63.50	-18.67	AVG	
9		17064.00	32.05	29.08	61.13	83.50	-22.37	peak	
10	*	17064.00	19.65	29.08	48.73	63.50	-14.77	AVG	
11		17988.00	30.52	31.60	62.12	83.50	-21.38	peak	
12		17988.00	16.78	31.60	48.38	63.50	-15.12	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (B67432F1E00013)	Polarization:	Horizontal

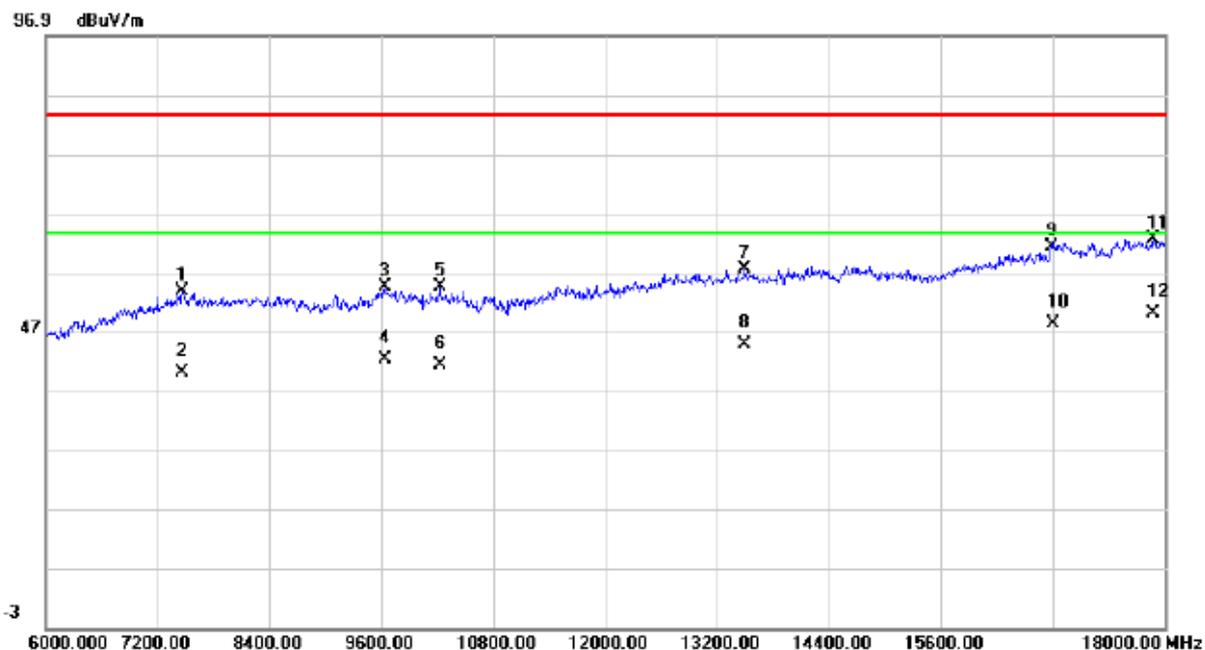


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7464.000	37.42	16.41	53.83	83.50	-29.67	peak	
2	7464.000	23.64	16.41	40.05	63.50	-23.45	AVG	
3	9636.000	36.43	18.08	54.51	83.50	-28.99	peak	
4	9636.000	24.12	18.08	42.20	63.50	-21.30	AVG	
5	10224.00	35.96	18.52	54.48	83.50	-29.02	peak	
6	10224.00	22.67	18.52	41.19	63.50	-22.31	AVG	
7	13488.00	33.25	24.25	57.50	83.50	-26.00	peak	
8	13488.00	20.46	24.25	44.71	63.50	-18.79	AVG	
9	16788.00	33.29	27.94	61.23	83.50	-22.27	peak	
10	16788.00	20.45	27.94	48.39	63.50	-15.11	AVG	
11	17880.00	31.13	31.32	62.45	83.50	-21.05	peak	
12 *	17880.00	18.64	31.32	49.96	63.50	-13.54	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Vertical

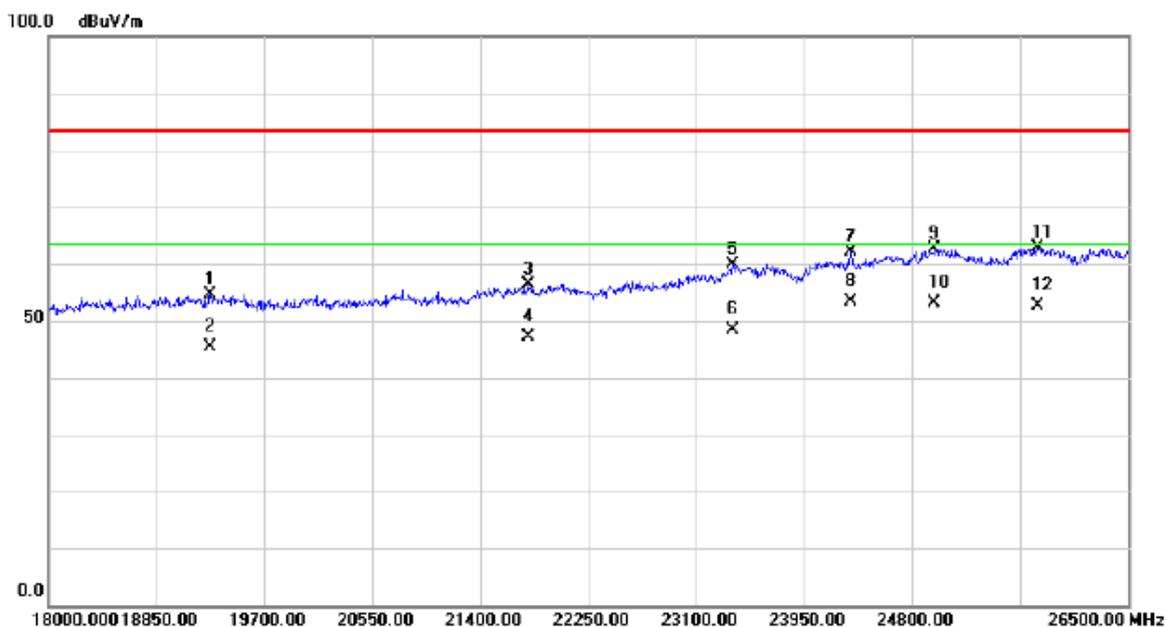


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	19279.25	32.93	21.58	54.51	83.50	-28.99	peak	
2	19279.25	23.77	21.58	45.35	63.50	-18.15	AVG	
3	21774.00	34.12	22.18	56.30	83.50	-27.20	peak	
4	21774.00	25.07	22.18	47.25	63.50	-16.25	AVG	
5	23389.00	35.49	24.46	59.95	83.50	-23.55	peak	
6	23389.00	23.90	24.46	48.36	63.50	-15.14	AVG	
7	24315.50	36.76	25.33	62.09	83.50	-21.41	peak	
8 *	24315.50	27.93	25.33	53.26	63.50	-10.24	AVG	
9	24978.50	36.92	25.79	62.71	83.50	-20.79	peak	
10	24978.50	27.42	25.79	53.21	63.50	-10.29	AVG	
11	25790.25	36.61	26.20	62.81	83.50	-20.69	peak	
12	25790.25	26.41	26.20	52.61	63.50	-10.89	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-801w
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (HWBYA32DC1600019)	Polarization:	Horizontal

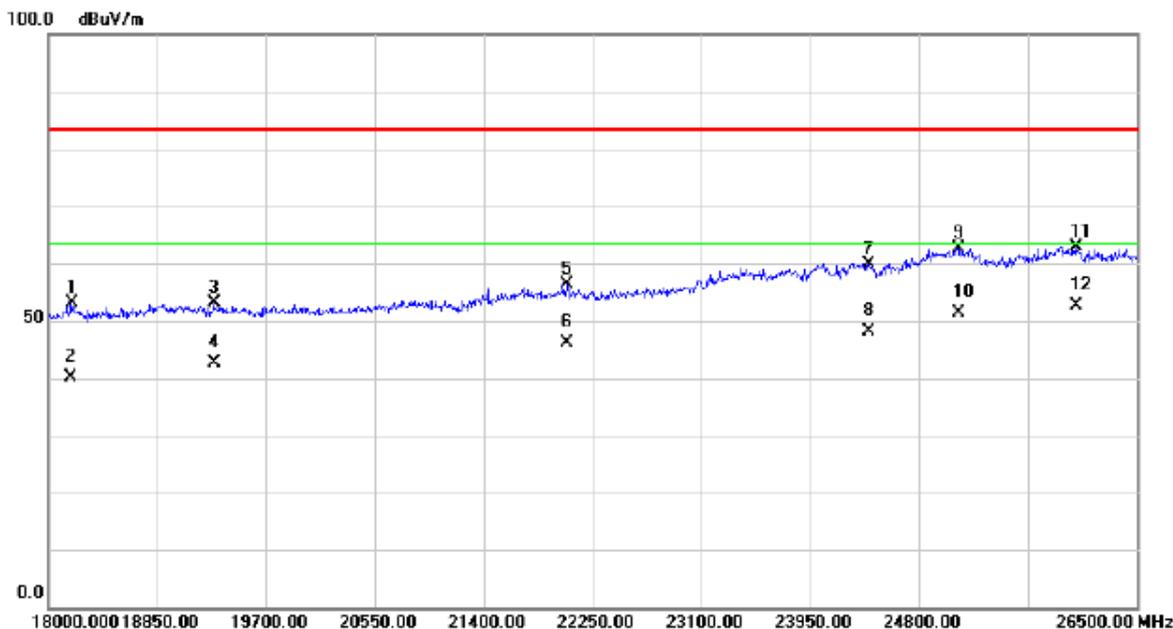


No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		18182.75	32.82	20.31	53.13	83.50	-30.37	peak	
2		18182.75	19.94	20.31	40.25	63.50	-23.25	AVG	
3		19292.00	31.66	21.58	53.24	83.50	-30.26	peak	
4		19292.00	20.94	21.58	42.52	63.50	-20.98	AVG	
5		22054.50	34.10	22.31	56.41	83.50	-27.09	peak	
6		22054.50	23.94	22.31	46.25	63.50	-17.25	AVG	
7		24409.00	34.51	25.45	59.96	83.50	-23.54	peak	
8		24409.00	22.80	25.45	48.25	63.50	-15.25	AVG	
9		25106.00	36.76	25.90	62.66	83.50	-20.84	peak	
10		25106.00	25.53	25.90	51.43	63.50	-12.07	AVG	
11		26024.00	36.86	26.13	62.99	83.50	-20.51	peak	
12	*	26024.00	26.48	26.13	52.61	63.50	-10.89	AVG	

E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (B67432F1E00013)	Polarization:	Vertical

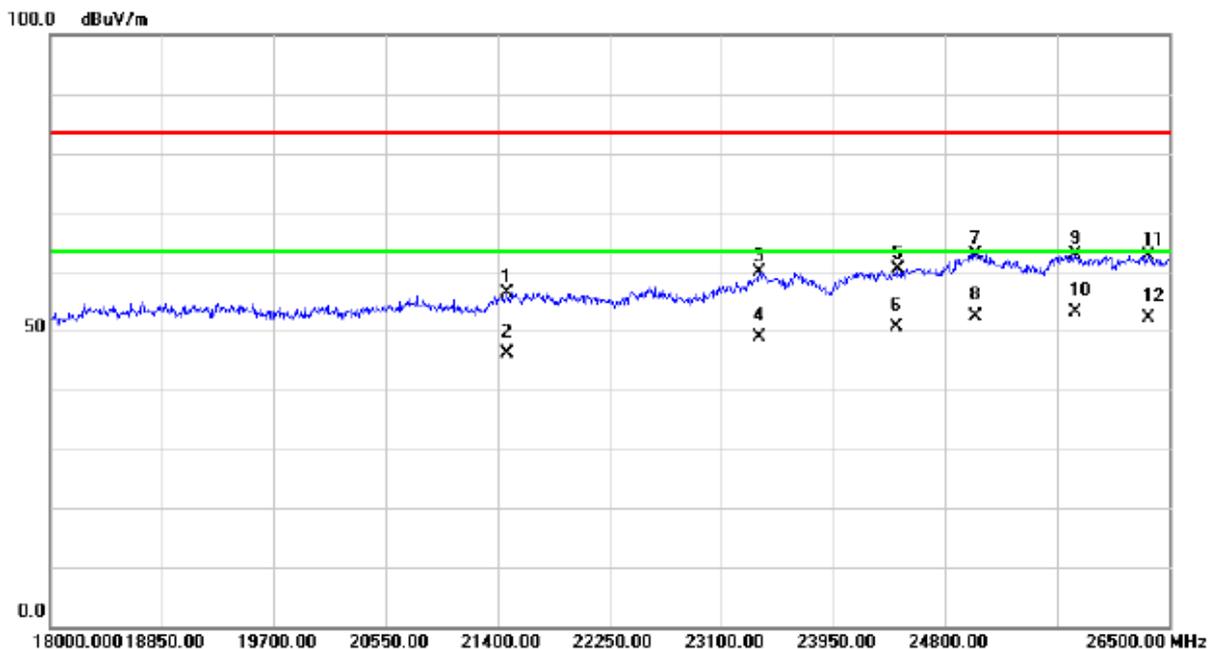

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	21476.50	34.44	22.02	56.46	83.50	-27.04	peak	
2	21476.50	24.12	22.02	46.14	63.50	-17.36	AVG	
3	23389.00	35.49	24.46	59.95	83.50	-23.55	peak	
4	23389.00	24.36	24.46	48.82	63.50	-14.68	AVG	
5	24438.75	35.02	25.47	60.49	83.50	-23.01	peak	
6	24438.75	25.22	25.47	50.69	63.50	-12.81	AVG	
7	25033.75	37.12	25.83	62.95	83.50	-20.55	peak	
8	25033.75	26.47	25.83	52.30	63.50	-11.20	AVG	
9	25790.25	36.61	26.20	62.81	83.50	-20.69	peak	
10 *	25790.25	26.84	26.20	53.04	63.50	-10.46	AVG	
11	26351.25	35.98	26.70	62.68	83.50	-20.82	peak	
12	26351.25	25.44	26.70	52.14	63.50	-11.36	AVG	


E.U.T :	HUAWEI MediaPad M2 8.0	Model Name :	M2-802L
Temperature :	22° C	Relative Humidity :	55 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Traffic + 5G wifi + BT + GPS + earphone + Camera on – Adapter: BYD / Desktop (B67432F1E00013)	Polarization:	Horizontal

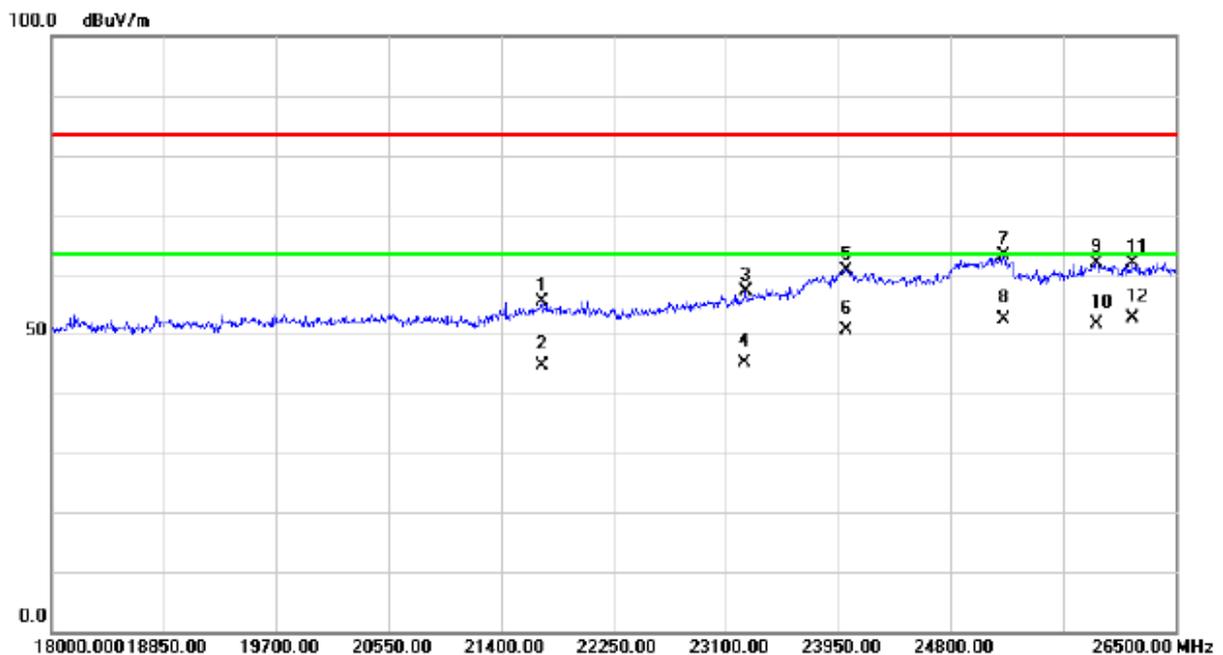


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		21706.00	33.19	22.14	55.33	83.50	-28.17	peak	
2		21706.00	22.45	22.14	44.59	63.50	-18.91	AVG	
3		23248.75	32.67	24.34	57.01	83.50	-26.49	peak	
4		23248.75	20.78	24.34	45.12	63.50	-18.38	AVG	
5		24009.50	35.54	25.00	60.54	83.50	-22.96	peak	
6		24009.50	25.64	25.00	50.64	63.50	-12.86	AVG	
7		25199.50	37.03	26.01	63.04	83.50	-20.46	peak	
8		25199.50	26.45	26.01	52.46	63.50	-11.04	AVG	
9		25909.25	35.81	26.14	61.95	83.50	-21.55	peak	
10		25909.25	25.45	26.14	51.59	63.50	-11.91	AVG	
11		26181.25	35.58	26.41	61.99	83.50	-21.51	peak	
12	*	26181.25	26.31	26.41	52.72	63.50	-10.78	AVG	

6. EUT TEST PHOTO

Conducted Measurement Photos Mode 1-6

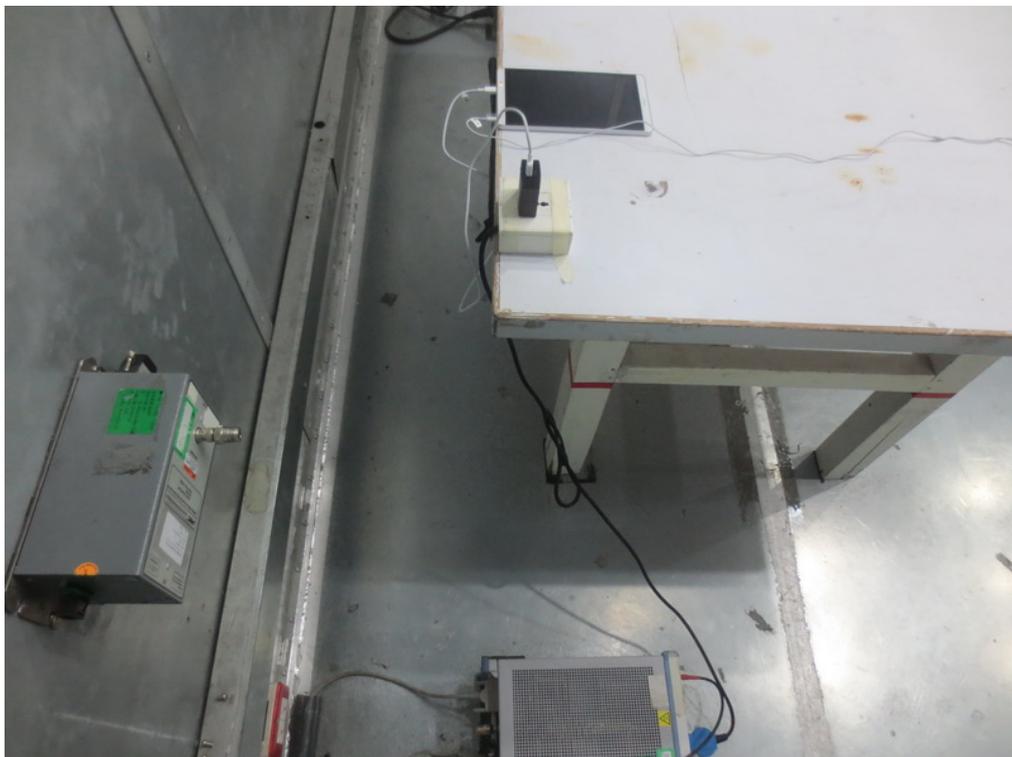


**Conducted Measurement Photos
Mode 8**

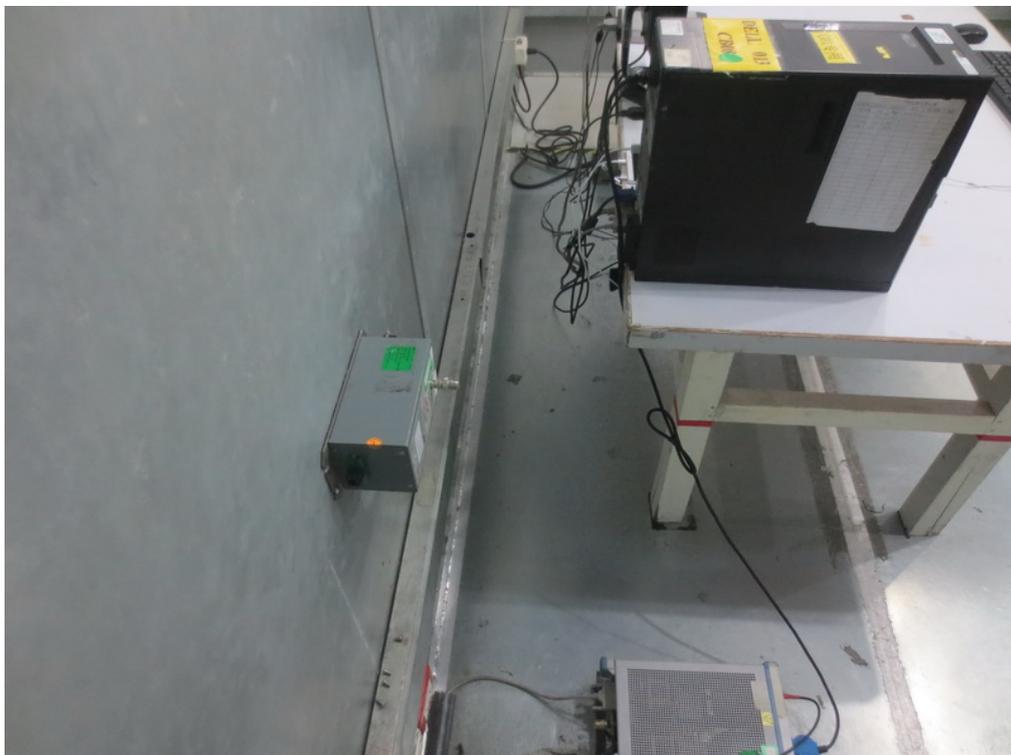



**Radiated Measurement Photos
Below 1G - Mode 1-6**



**Radiated Measurement Photos
Below 1G - Mode 8**

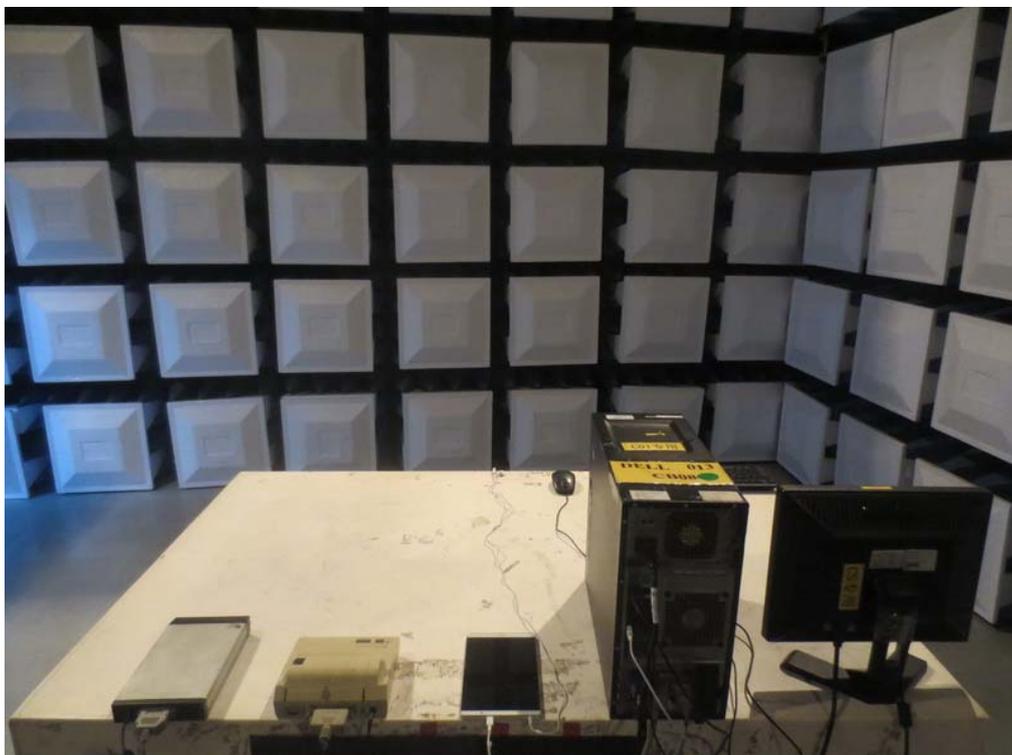

**Radiated Measurement Photos
Above 1GHz - Mode 1-7**

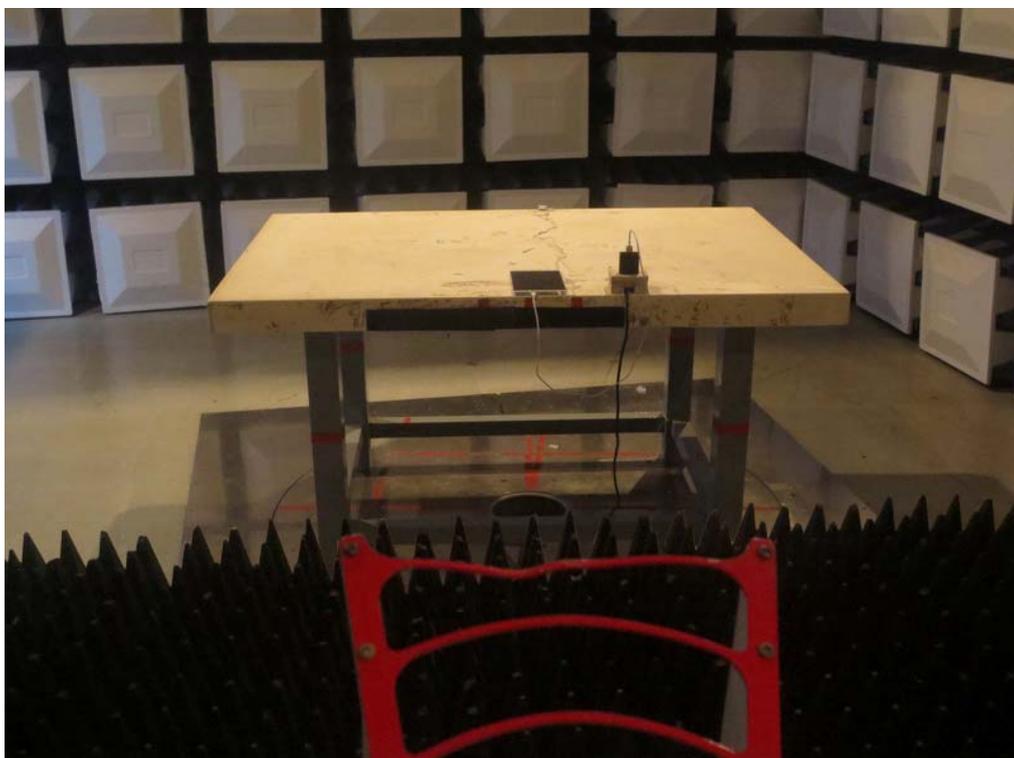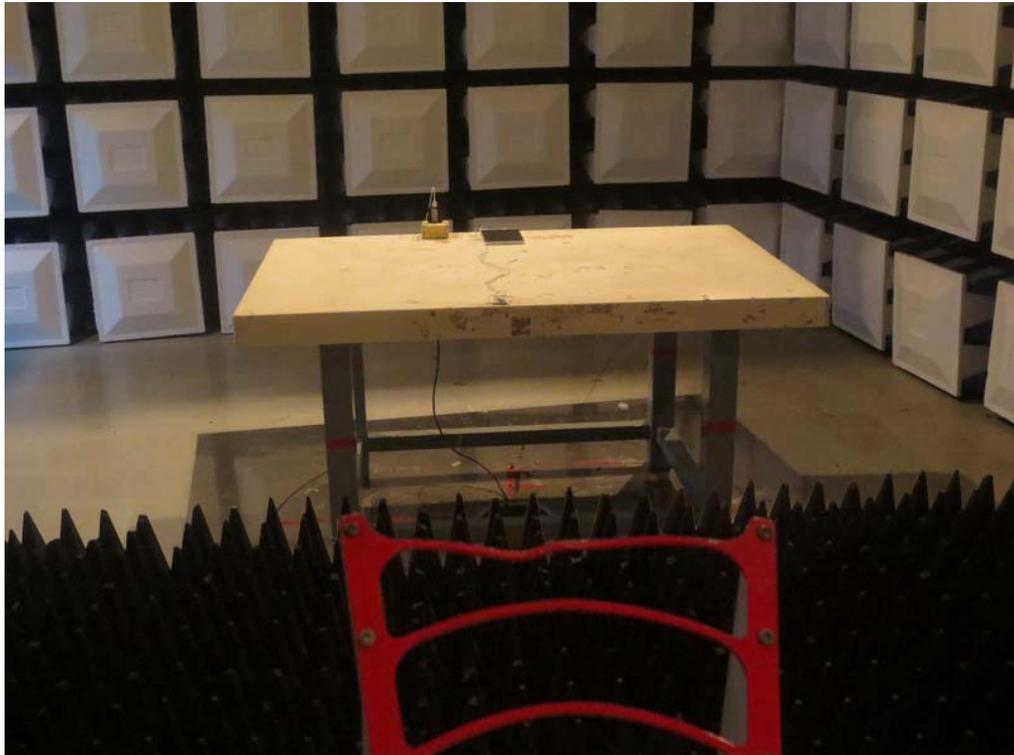

**Radiated Measurement Photos
Below 1G - Mode 8**

