

FCC Test Report

FCC ID: QISM2-A01L

Project No. : 1511C249
Equipment : HUAWEI MediaPad M2 10.0
Model Name : M2-A01L
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Nov. 26, 2015
Date of Test : Nov. 26, 2015 ~ Dec. 10, 2015
Issued Date : Dec. 11, 2015
Tested by : BTL Inc.

Testing Engineer : Pike Lee
(Pike Lee)

Technical Manager : Jeff Yang
(Jeff Yang)

Authorized Signatory : Andy Chiu
(Andy Chiu)

B T L I N C .

B1, No. 37, Lane 365, Yang-Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	15
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)	18
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	18
5 . MEASUREMENT INSTRUMENTS LIST	19
6 . EUT TEST PHOTO	20
ATTACHMENT A - CONDUCTED EMISSION	24
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	41
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	60

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1511C249	Original Issue.	Dec. 11, 2015

1. CERTIFICATION

Equipment : HUAWEI MediaPad M2 10.0
Brand Name : HUAWEI
Model Name : M2-A01L
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Date of Test : Nov. 26, 2015 ~ Dec. 10, 2015
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B: 2014
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1511C249) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B: 2014 ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE (2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is 4G Hz which exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of B1, No. 37, Lane 365, Yang-Guang St., Nei-Hu District, Taipei City 114, Taiwan.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
C02	CISPR	150 KHz~30MHz	2.59

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
CB08	CISPR	30MHz~200MHz	V	3.22
		30MHz~200MHz	H	3.35
		200MHz~ 1,000MHz	V	3.24
		200MHz~ 1,000MHz	H	3.11
		1,000MHz~18,000MHz	V	4.05
		1,000MHz~18,000MHz	H	3.97
		18,000MHz~40,000MHz	V	4.04
18,000MHz~40,000MHz	H	4.01		

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MediaPad M2 10.0
Brand Name	HUAWEI
Model Name	M2-A01L
Model Difference	N/A
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) Shenzhen Huntkey Electric Co., Ltd. (3) Phihong Technology Co.,Ltd Model: HW-050200U01 #2 Supplied from battery. Manufacturer: (1) Sunwoda Electronic Co., LTD (2) SCUD (FUJIAN) Electronics Co., Ltd (3) Harbin Coslight Power Co., Ltd. Battery Model: HB26A510EBC
Power Rating	#1 I/P: 100V~240V AC and 50/60 Hz,0.5A O/P: +5V $\overline{=}$ 2A #2 DC 3.8V 6660mAh
Battery: Sunwoda S/N	YER0115B09000002
Battery: SCUD S/N	YER0115B09000272
Battery: Harbin S/N	YER0115B09000068
HW Version	SH1M2A04LM
SW Version	M2-A01LV100R001

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- 2.

Item	Mfr/Brand	Model.
USB Cable	Connrex (Shen Zhen) Industrial, Ltd.	CD-U0405-1042
	Unirise Communication Technology Co.,Ltd.	LSA00714
	SHEN ZHEN PANG NGAI INDUSTRIAL CO., LTD	H09-000543
Earphone	GoerTek Inc	HG-04A
	MERRY ELECTRONICS CO., LTD	EMC323-011-01
Battery	Sunwoda Electronic Co., LTD	HB26A510EBC
	SCUD (FUJIAN) Electronics Co., Ltd	
	Harbin Coslight Power Co., Ltd.	
M-pen	HUAWEI TECHNOLOGIES CO.,LTD.	AF60

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Adapter+earphone+camera on+idle+wifi+gps+bt
Mode 2	Adapter+earphone+playing+idle
Mode 3	Adapter+Speaker+playing+idle
Mode 4	Adapter+Speaker+Traffic
Mode 5	Adapter+earphone+Traffic
Mode 6	USB copy(EUT with PC)+earphone+idle


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+earphone+camera on+idle+wifi+gps+bt
Mode 2	Adapter+earphone+playing+idle
Mode 3	Adapter+Speaker+playing+idle
Mode 4	Adapter+Speaker+Traffic
Mode 5	Adapter+earphone+Traffic
Mode 6	USB copy(EUT with PC)+earphone+idle


For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+earphone+camera on+idle+wifi+gps+bt
Mode 2	Adapter+earphone+playing+idle
Mode 3	Adapter+Speaker+playing+idle
Mode 4	Adapter+Speaker+Traffic
Mode 5	Adapter+earphone+Traffic
Mode 6	USB copy(EUT with PC)+earphone+idle

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 6

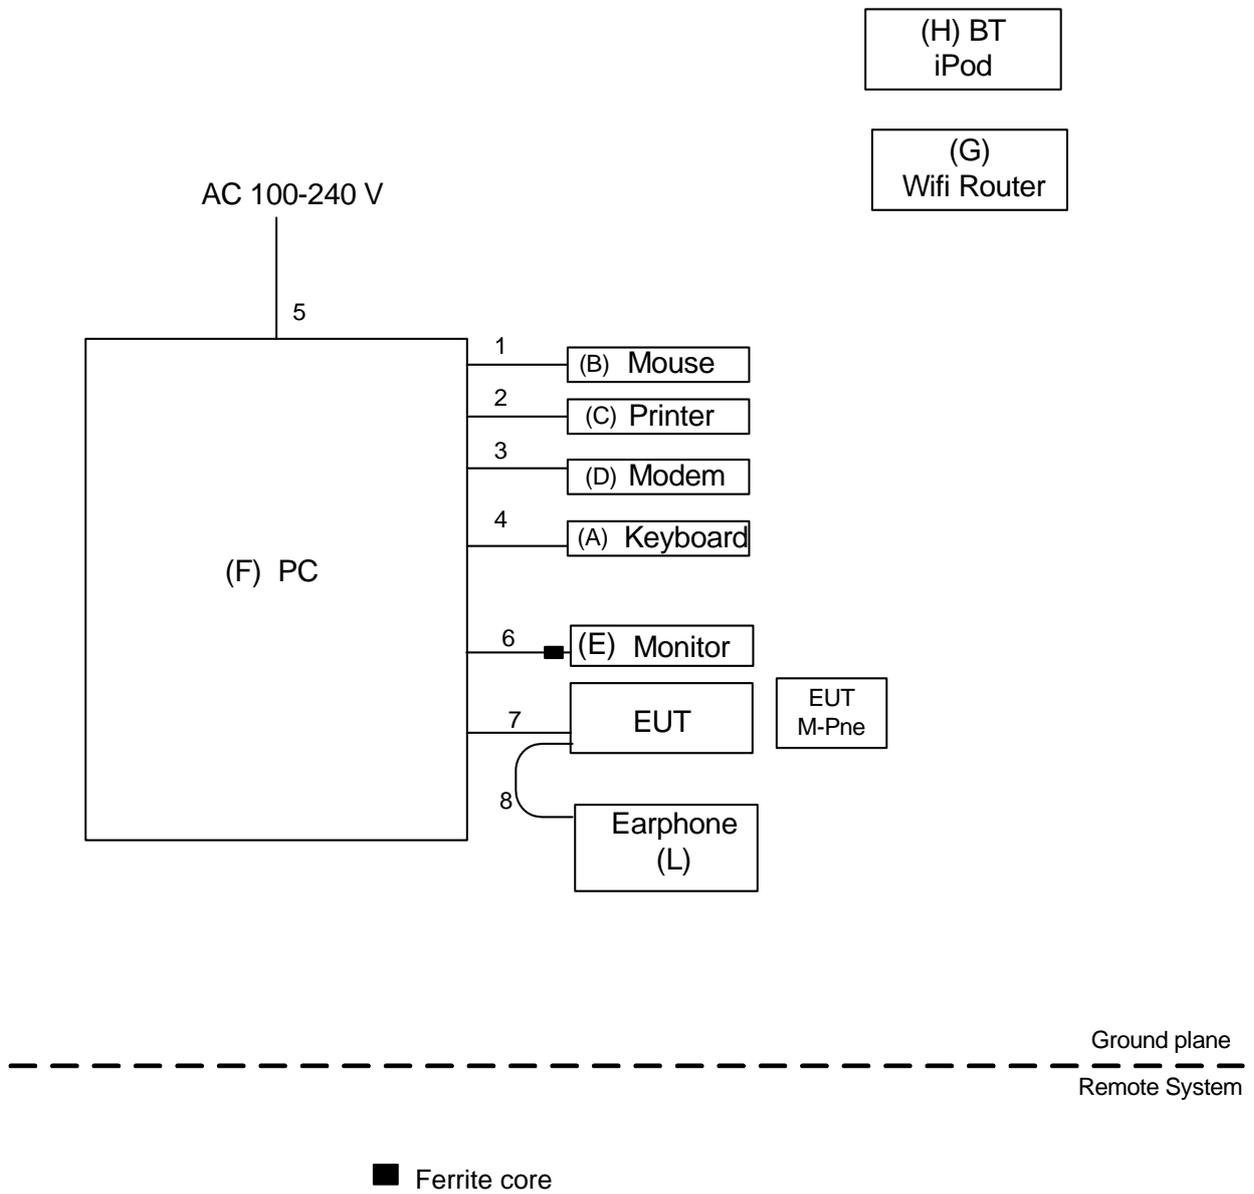

Mode 1-5

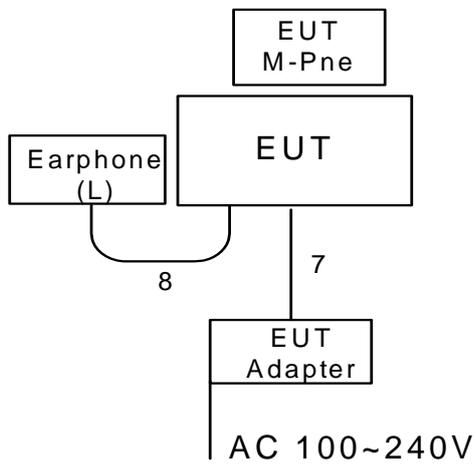

(H)
BT iPod

(G)
Wifi Router

(I) Wireless
Communication
Test SET

(J) Wideband Radio
Communication
Tester

(K) Signal
Generator

----- Ground plane -----
----- Remote System -----

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH65965890 71T08NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180 -6AG-1WNS
F	PC	Dell	DCSM	DOC	G7K832X
G	Router	TP-LINK	TL-WR1041N	DOC	N/A
H	iPod nano	Apple	A1446	BCG-A1446A	C7RJJR6NF0GV
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183
J	Wideband Radio Communication Tester	RS	CMW500	N/A	122125
K	SignalGenerator	Agilent	E4438C	N/A	MY49071316
L	Earphone	HUAWEI	N/A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1.0m	USB Cable
8	NO	NO	1.3m	Audio Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value – Limit Value


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

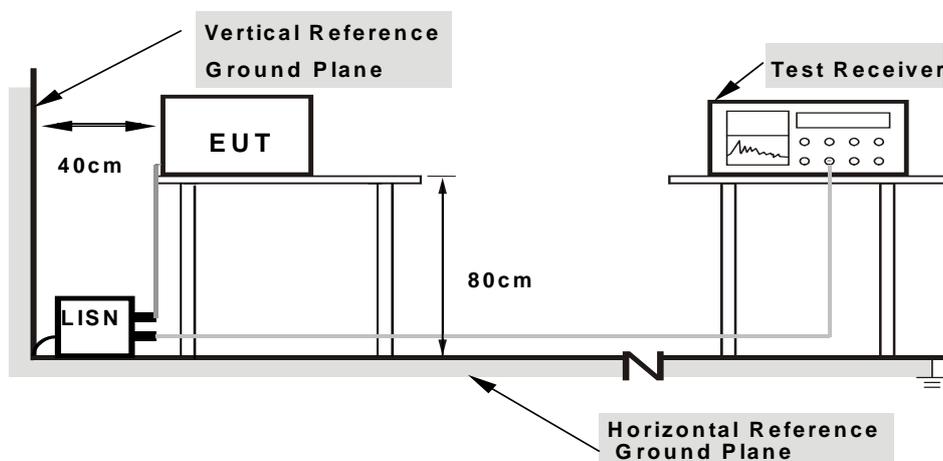

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 27°C Relative Humidity: 55%

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note 』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

CISPR 22 or CAN/CSA-CISPR 22-10:

Frequency (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	
30 - 230	40	30
230 - 1000	47	37

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B: 2014
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

Note:

For measurement of frequency 1GHz -30GHz, the EUT was set 3 meters away from the receiver antenna.

Emission level (dBuV/m)=20log Emission level (uV/m).

The limits above 6GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1m

Distance extrapolation factor = $20 \log (3\text{m}/1\text{m})$ dB ;


Limit line = specific limits (dBuV) + 9.5 dB.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

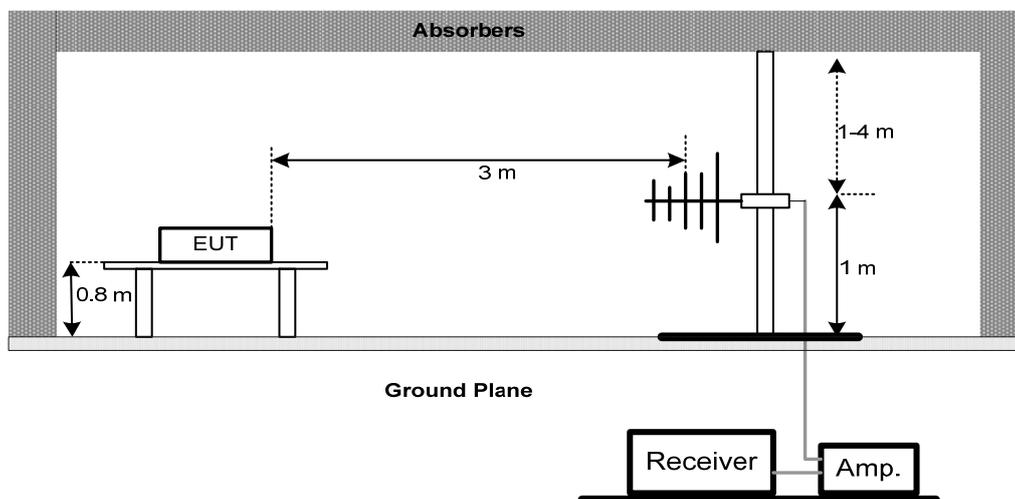

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

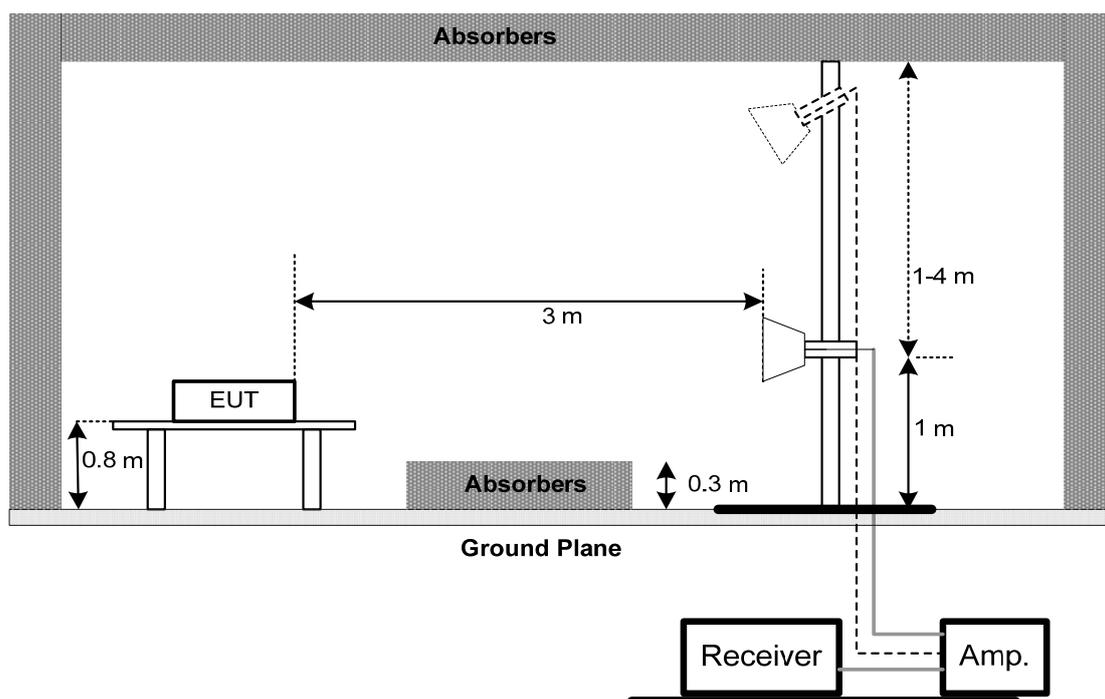

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 27°C Relative Humidity: 55%

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 27°C Relative Humidity: 55%

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100087	Nov. 21, 2016
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jul. 08, 2016
2	Pre-Amplifier	Anritsu	MH648A	M92649	Apr. 16, 2016
3	Test Cable	TIMES	LMR-400	12M	May 12, 2016
4	Test Cable	TIMES	LMR-400	3M	May 12, 2016
5	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
6	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jan. 11, 2016
7	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 14, 2016
8	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
9	Microflex Cable	AISI	S104-SMAP-1	10M	May 13, 2016
10	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May 11, 2016
11	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 12, 2016
12	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A



Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.



6. EUT TEST PHOTO

Conducted Measurement Photos Mode 6



Conducted Measurement Photos**Mode 1~5**

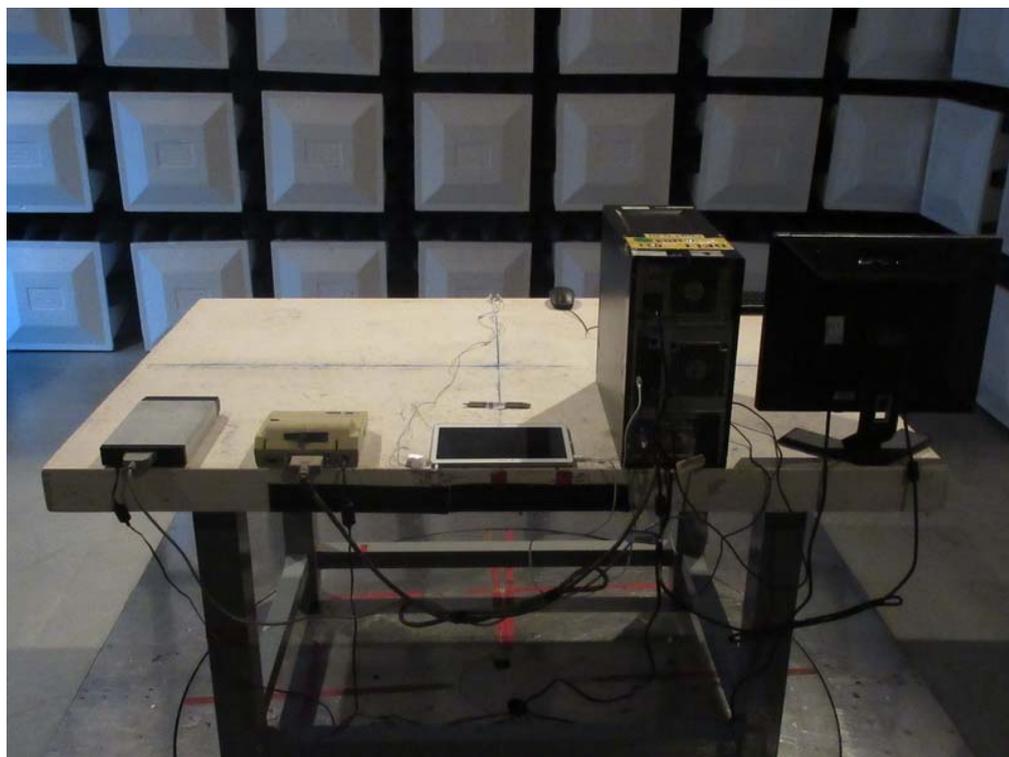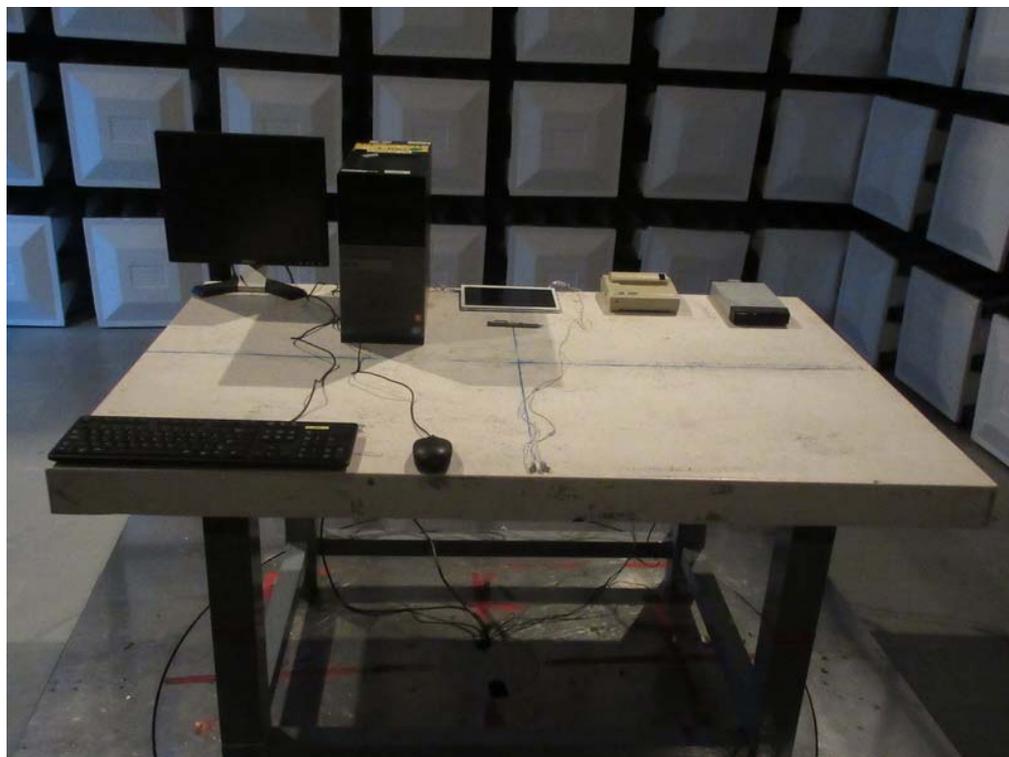
Radiated Measurement Photos**Mode 6**

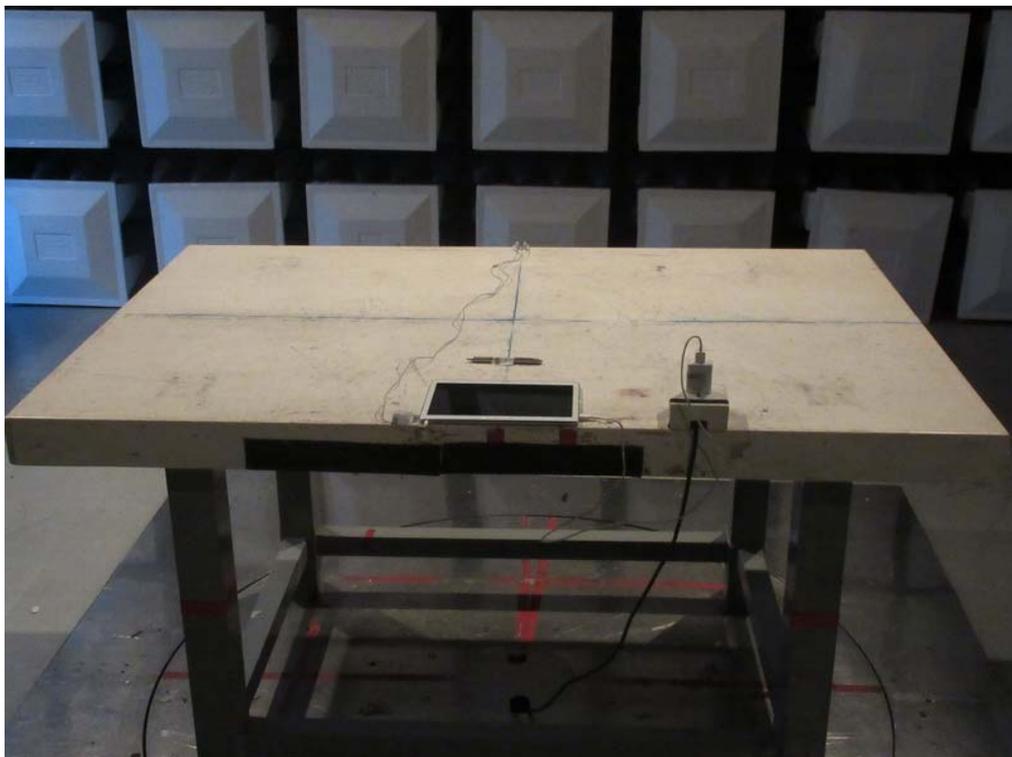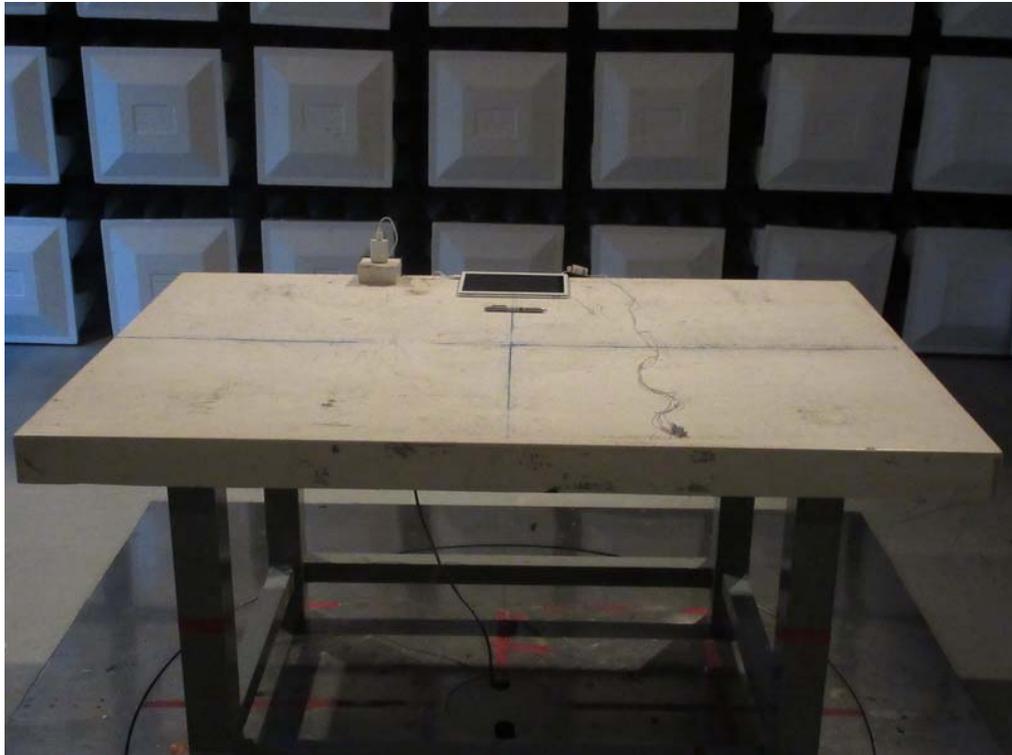Radiated Measurement Photos**Mode 1~5**

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight


Line

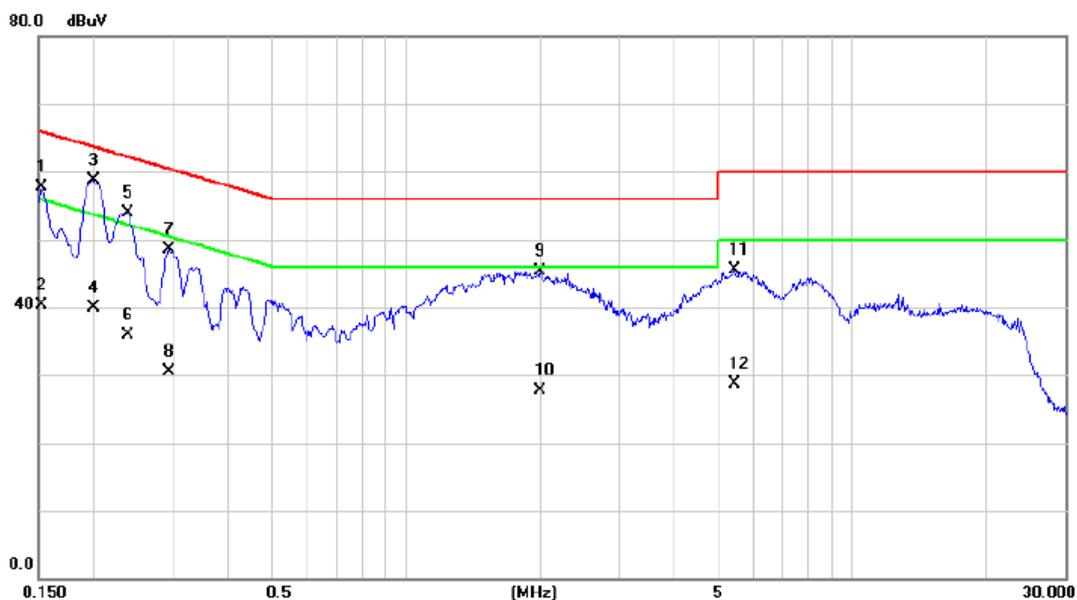

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	48.05	9.67	57.72	65.88	-8.16	QP	
2		0.1522	30.70	9.67	40.37	55.88	-15.51	AVG	
3	*	0.1995	48.91	9.71	58.62	63.63	-5.01	QP	
4		0.1995	30.20	9.71	39.91	53.63	-13.72	AVG	
5		0.2378	44.14	9.73	53.87	62.17	-8.30	QP	
6		0.2378	26.10	9.73	35.83	52.17	-16.34	AVG	
7		0.2940	38.67	9.76	48.43	60.41	-11.98	QP	
8		0.2940	20.80	9.76	30.56	50.41	-19.85	AVG	
9		2.0018	35.51	9.86	45.37	56.00	-10.63	QP	
10		2.0018	17.90	9.86	27.76	46.00	-18.24	AVG	
11		5.4510	36.33	9.16	45.49	60.00	-14.51	QP	
12		5.4510	19.50	9.16	28.66	50.00	-21.34	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight


Neutral

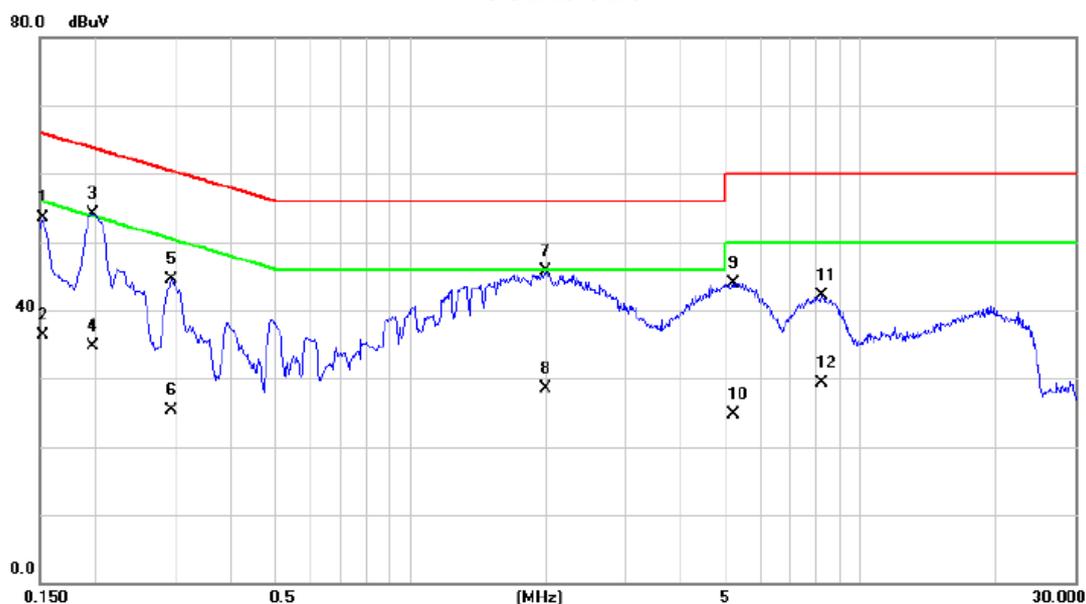

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	44.00	9.59	53.59	65.88	-12.29	QP	
2		0.1522	26.70	9.59	36.29	55.88	-19.59	AVG	
3	*	0.1973	44.52	9.61	54.13	63.72	-9.59	QP	
4		0.1973	25.10	9.61	34.71	53.72	-19.01	AVG	
5		0.2940	34.88	9.63	44.51	60.41	-15.90	QP	
6		0.2940	15.70	9.63	25.33	50.41	-25.08	AVG	
7		1.9995	35.77	9.93	45.70	56.00	-10.30	QP	
8		1.9995	18.60	9.93	28.53	46.00	-17.47	AVG	
9		5.2283	33.86	10.11	43.97	60.00	-16.03	QP	
10		5.2283	14.50	10.11	24.61	50.00	-25.39	AVG	
11		8.2005	31.90	10.11	42.01	60.00	-17.99	QP	
12		8.2005	19.20	10.11	29.31	50.00	-20.69	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: BYD +USB Cable: Unirise +Battery: SCUD


Line

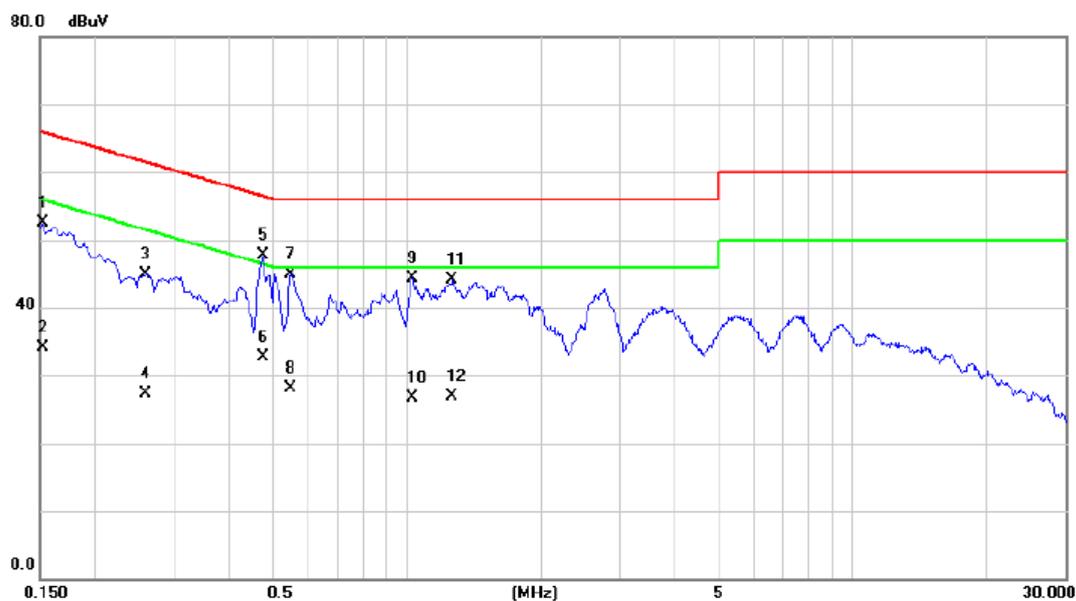

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	42.78	9.67	52.45	65.88	-13.43	QP	
2		0.1522	24.50	9.67	34.17	55.88	-21.71	AVG	
3		0.2602	35.14	9.74	44.88	61.43	-16.55	QP	
4		0.2602	17.60	9.74	27.34	51.43	-24.09	AVG	
5	*	0.4762	37.79	9.82	47.61	56.41	-8.80	QP	
6		0.4762	22.90	9.82	32.72	46.41	-13.69	AVG	
7		0.5482	35.15	9.84	44.99	56.00	-11.01	QP	
8		0.5482	18.20	9.84	28.04	46.00	-17.96	AVG	
9		1.0296	34.40	9.99	44.39	56.00	-11.61	QP	
10		1.0296	16.70	9.99	26.69	46.00	-19.31	AVG	
11		1.2638	34.01	10.01	44.02	56.00	-11.98	QP	
12		1.2638	16.90	10.01	26.91	46.00	-19.09	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: BYD +USB Cable: Unirise +Battery: SCUD


Neutral

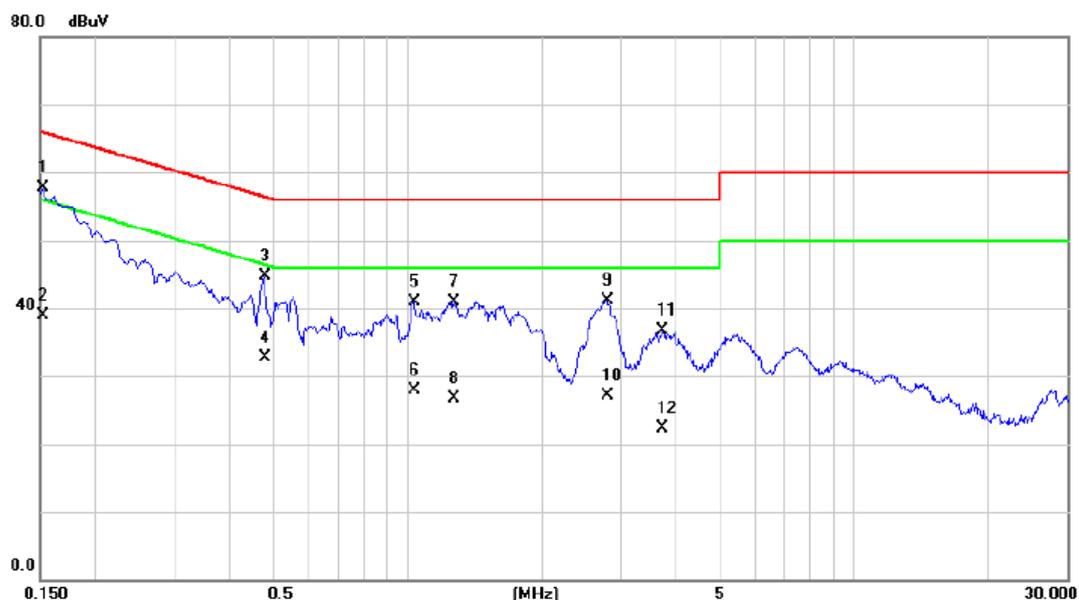

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1522	48.14	9.59	57.73	65.88	-8.15	QP	
2		0.1522	29.40	9.59	38.99	55.88	-16.89	AVG	
3		0.4784	35.09	9.65	44.74	56.37	-11.63	QP	
4		0.4784	23.10	9.65	32.75	46.37	-13.62	AVG	
5		1.0363	31.18	9.79	40.97	56.00	-15.03	QP	
6		1.0363	18.20	9.79	27.99	46.00	-18.01	AVG	
7		1.2727	31.02	9.81	40.83	56.00	-15.17	QP	
8		1.2727	16.90	9.81	26.71	46.00	-19.29	AVG	
9		2.7960	31.19	9.83	41.02	56.00	-14.98	QP	
10		2.7960	17.20	9.83	27.03	46.00	-18.97	AVG	
11		3.7162	26.84	9.93	36.77	56.00	-19.23	QP	
12		3.7162	12.40	9.93	22.33	46.00	-23.67	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Huntkey +USB Cable: Connrex +Battery: Sunwoda


Line

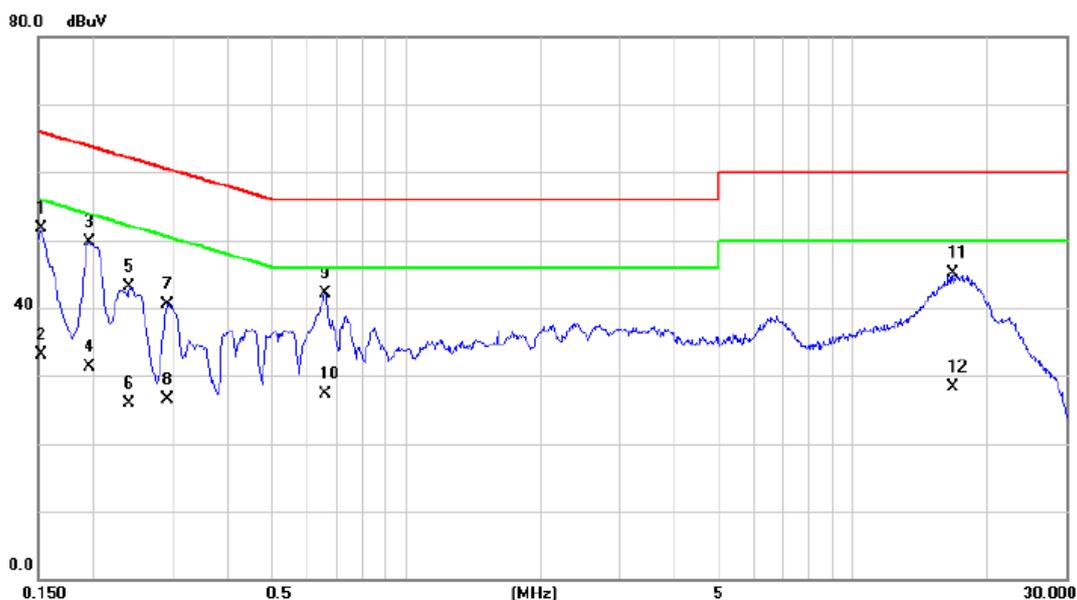

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	41.97	9.67	51.64	65.88	-14.24	QP	
2		0.1522	23.40	9.67	33.07	55.88	-22.81	AVG	
3		0.1950	40.08	9.71	49.79	63.82	-14.03	QP	
4		0.1950	21.50	9.71	31.21	53.82	-22.61	AVG	
5		0.2400	33.30	9.73	43.03	62.10	-19.07	QP	
6		0.2400	16.20	9.73	25.93	52.10	-26.17	AVG	
7		0.2917	30.69	9.76	40.45	60.48	-20.03	QP	
8		0.2917	16.70	9.76	26.46	50.48	-24.02	AVG	
9	*	0.6607	32.14	9.89	42.03	56.00	-13.97	QP	
10		0.6607	17.50	9.89	27.39	46.00	-18.61	AVG	
11		16.7843	34.70	10.32	45.02	60.00	-14.98	QP	
12		16.7843	17.90	10.32	28.22	50.00	-21.78	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Huntkey +USB Cable: Connrex +Battery: Sunwoda


Neutral

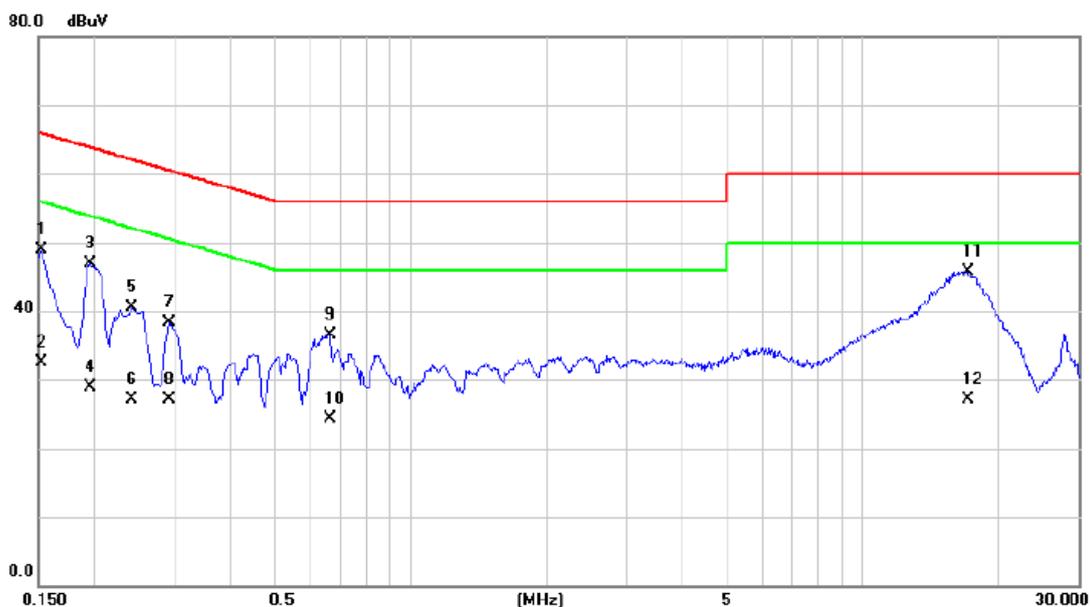

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1522	39.33	9.59	48.92	65.88	-16.96	QP	
2	0.1522	22.90	9.59	32.49	55.88	-23.39	AVG	
3	0.1950	37.26	9.61	46.87	63.82	-16.95	QP	
4	0.1950	19.20	9.61	28.81	53.82	-25.01	AVG	
5	0.2423	30.82	9.62	40.44	62.02	-21.58	QP	
6	0.2423	17.50	9.62	27.12	52.02	-24.90	AVG	
7	0.2917	28.62	9.63	38.25	60.48	-22.23	QP	
8	0.2917	17.50	9.63	27.13	50.48	-23.35	AVG	
9	0.6630	26.86	9.69	36.55	56.00	-19.45	QP	
10	0.6630	14.70	9.69	24.39	46.00	-21.61	AVG	
11 *	17.0835	35.49	10.28	45.77	60.00	-14.23	QP	
12	17.0835	16.80	10.28	27.08	50.00	-22.92	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight


Line

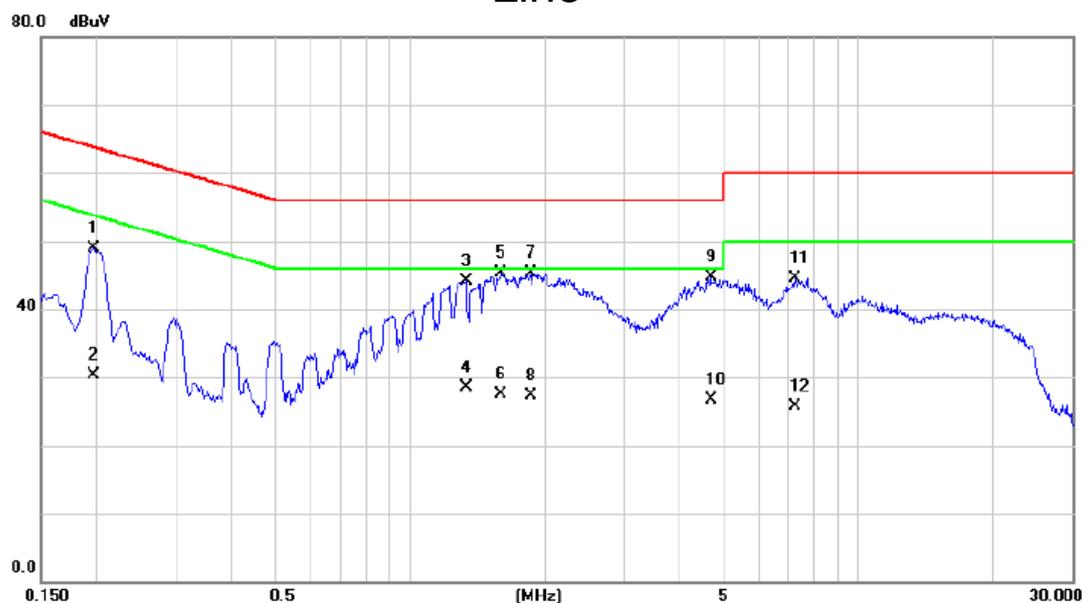

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1973	39.25	9.71	48.96	63.72	-14.76	QP	
2		0.1973	20.60	9.71	30.31	53.72	-23.41	AVG	
3		1.3313	34.08	9.98	44.06	56.00	-11.94	QP	
4		1.3313	18.50	9.98	28.48	46.00	-17.52	AVG	
5		1.5945	35.32	9.91	45.23	56.00	-10.77	QP	
6		1.5945	17.50	9.91	27.41	46.00	-18.59	AVG	
7	*	1.8555	35.44	9.88	45.32	56.00	-10.68	QP	
8		1.8555	17.50	9.88	27.38	46.00	-18.62	AVG	
9		4.6928	35.43	9.22	44.65	56.00	-11.35	QP	
10		4.6928	17.50	9.22	26.72	46.00	-19.28	AVG	
11		7.2375	34.58	9.98	44.56	60.00	-15.44	QP	
12		7.2375	15.70	9.98	25.68	50.00	-24.32	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight


Neutral

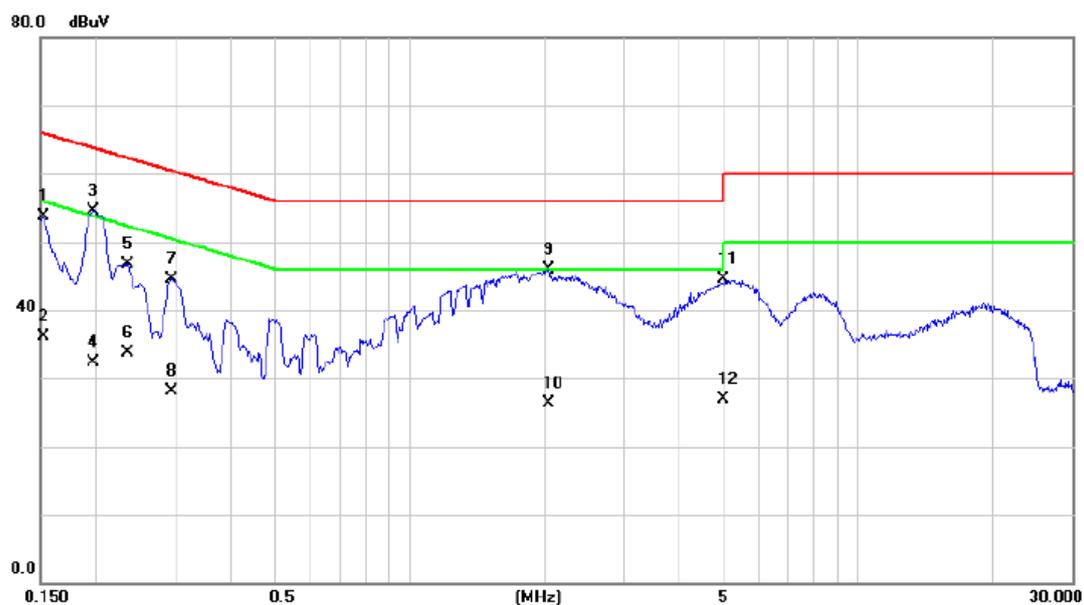

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	44.14	9.59	53.73	65.88	-12.15	QP	
2		0.1522	26.50	9.59	36.09	55.88	-19.79	AVG	
3	*	0.1973	44.87	9.61	54.48	63.72	-9.24	QP	
4		0.1973	22.70	9.61	32.31	53.72	-21.41	AVG	
5		0.2355	37.06	9.62	46.68	62.25	-15.57	QP	
6		0.2355	24.10	9.62	33.72	52.25	-18.53	AVG	
7		0.2940	34.94	9.63	44.57	60.41	-15.84	QP	
8		0.2940	18.50	9.63	28.13	50.41	-22.28	AVG	
9		2.0423	35.98	9.92	45.90	56.00	-10.10	QP	
10		2.0423	16.40	9.92	26.32	46.00	-19.68	AVG	
11		5.0055	34.32	10.10	44.42	60.00	-15.58	QP	
12		5.0055	16.90	10.10	27.00	50.00	-23.00	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight


Line

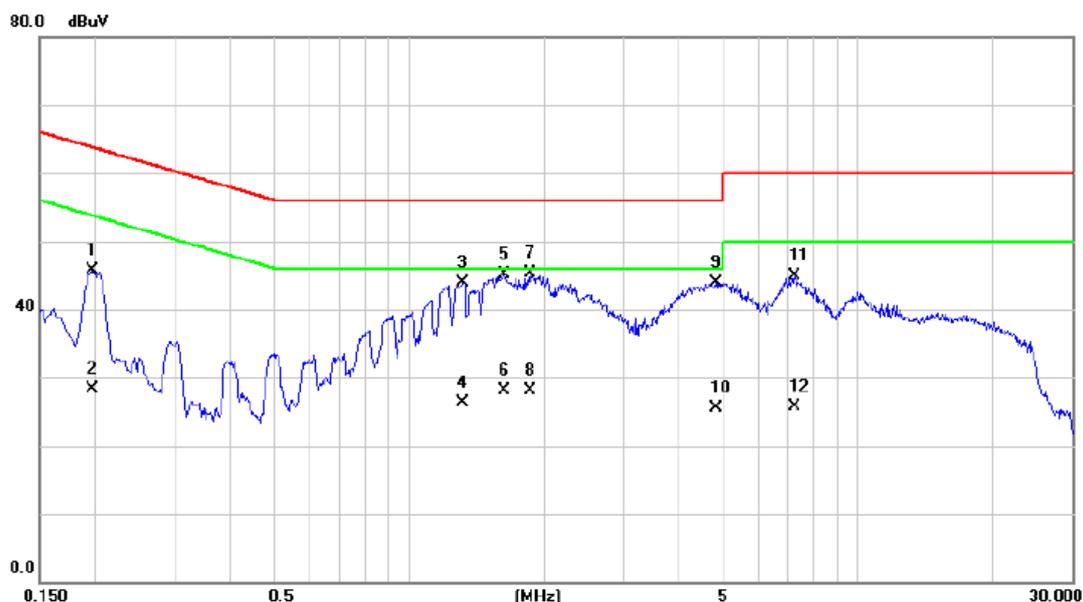

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1973	35.91	9.71	45.62	63.72	-18.10	QP	
2		0.1973	18.50	9.71	28.21	53.72	-25.51	AVG	
3		1.3178	33.85	9.99	43.84	56.00	-12.16	QP	
4		1.3178	16.40	9.99	26.39	46.00	-19.61	AVG	
5		1.6328	35.22	9.90	45.12	56.00	-10.88	QP	
6		1.6328	18.20	9.90	28.10	46.00	-17.90	AVG	
7	*	1.8668	35.37	9.88	45.25	56.00	-10.75	QP	
8		1.8668	18.20	9.88	28.08	46.00	-17.92	AVG	
9		4.8323	34.78	9.09	43.87	56.00	-12.13	QP	
10		4.8323	16.40	9.09	25.49	46.00	-20.51	AVG	
11		7.2285	34.97	9.98	44.95	60.00	-15.05	QP	
12		7.2285	15.80	9.98	25.78	50.00	-24.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight


Neutral

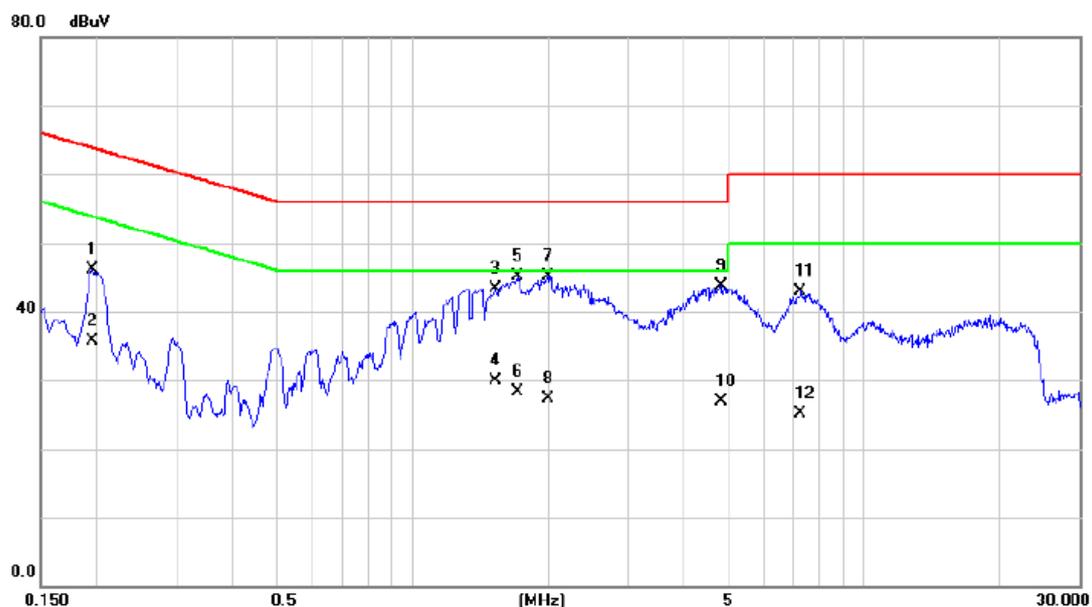

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1950	36.56	9.61	46.17	63.82	-17.65	QP	
2		0.1950	26.10	9.61	35.71	53.82	-18.11	AVG	
3		1.5315	33.43	9.83	43.26	56.00	-12.74	QP	
4		1.5315	20.10	9.83	29.93	46.00	-16.07	AVG	
5		1.7160	35.16	9.86	45.02	56.00	-10.98	QP	
6		1.7160	18.40	9.86	28.26	46.00	-17.74	AVG	
7	*	1.9928	35.15	9.93	45.08	56.00	-10.92	QP	
8		1.9928	17.30	9.93	27.23	46.00	-18.77	AVG	
9		4.8210	33.69	10.08	43.77	56.00	-12.23	QP	
10		4.8210	16.90	10.08	26.98	46.00	-19.02	AVG	
11		7.2173	32.71	10.14	42.85	60.00	-17.15	QP	
12		7.2173	14.90	10.14	25.04	50.00	-24.96	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight


Line

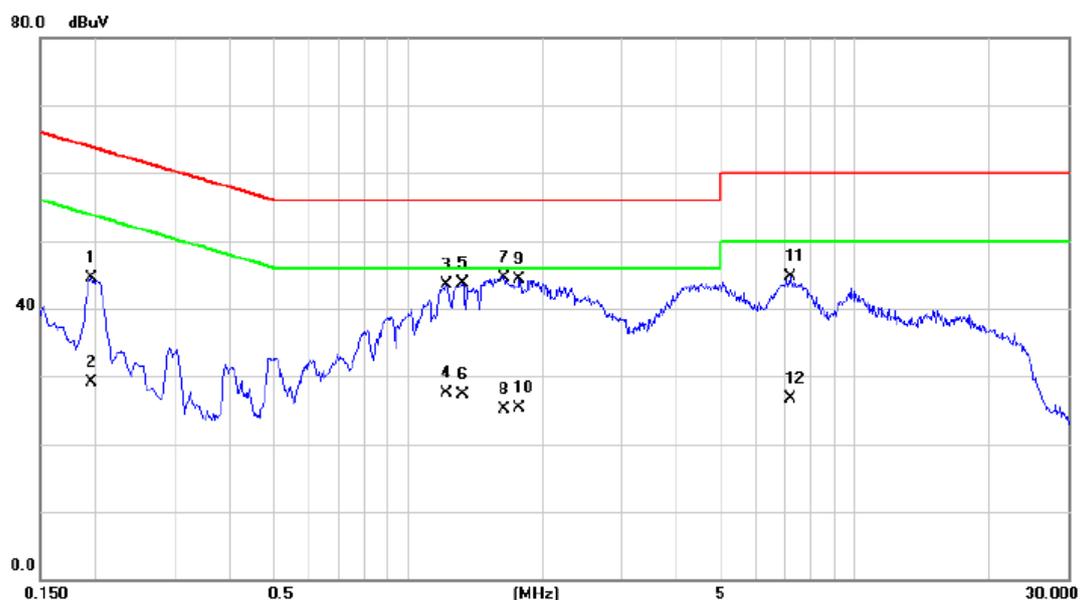

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1950	34.73	9.71	44.44	63.82	-19.38	QP	
2		0.1950	19.40	9.71	29.11	53.82	-24.71	AVG	
3		1.2210	33.49	10.01	43.50	56.00	-12.50	QP	
4		1.2210	17.50	10.01	27.51	46.00	-18.49	AVG	
5		1.3223	33.80	9.99	43.79	56.00	-12.21	QP	
6		1.3223	17.40	9.99	27.39	46.00	-18.61	AVG	
7	*	1.6418	34.70	9.90	44.60	56.00	-11.40	QP	
8		1.6418	15.30	9.90	25.20	46.00	-20.80	AVG	
9		1.7723	34.34	9.89	44.23	56.00	-11.77	QP	
10		1.7723	15.40	9.89	25.29	46.00	-20.71	AVG	
11		7.1745	34.72	9.98	44.70	60.00	-15.30	QP	
12		7.1745	16.80	9.98	26.78	50.00	-23.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight


Neutral

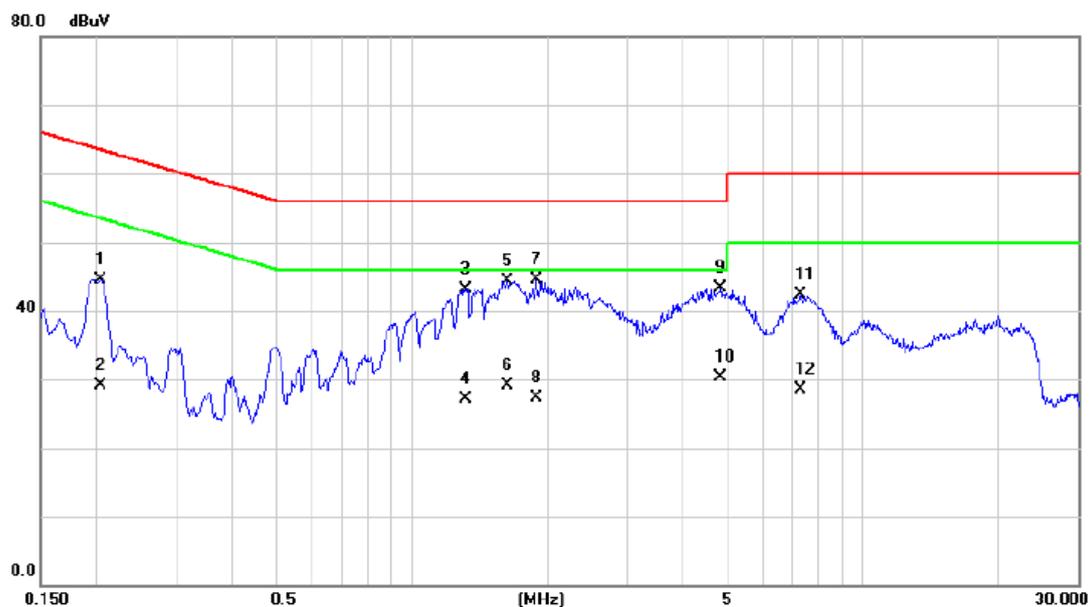

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2040	34.91	9.61	44.52	63.45	-18.93	QP	
2		0.2040	19.40	9.61	29.01	53.45	-24.44	AVG	
3		1.3154	33.27	9.81	43.08	56.00	-12.92	QP	
4		1.3154	17.20	9.81	27.01	46.00	-18.99	AVG	
5		1.6305	34.51	9.85	44.36	56.00	-11.64	QP	
6		1.6305	19.20	9.85	29.05	46.00	-16.95	AVG	
7	*	1.8870	34.64	9.91	44.55	56.00	-11.45	QP	
8		1.8870	17.40	9.91	27.31	46.00	-18.69	AVG	
9		4.8345	33.21	10.08	43.29	56.00	-12.71	QP	
10		4.8345	20.30	10.08	30.38	46.00	-15.62	AVG	
11		7.2668	32.13	10.13	42.26	60.00	-17.74	QP	
12		7.2668	18.40	10.13	28.53	50.00	-21.47	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight


Line

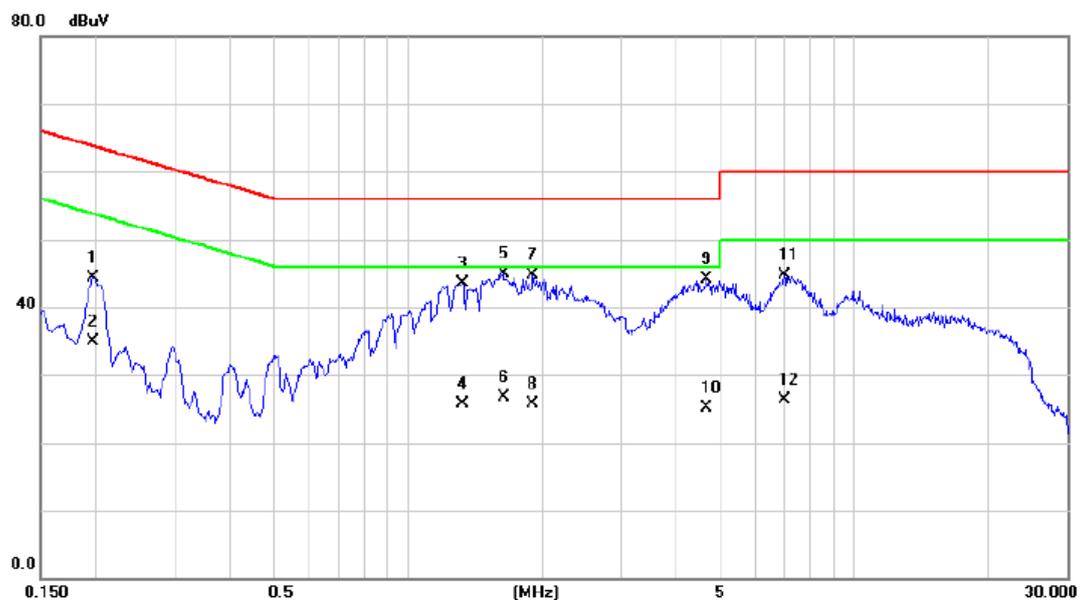

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1973	34.69	9.71	44.40	63.72	-19.32	QP	
2		0.1973	25.10	9.71	34.81	53.72	-18.91	AVG	
3		1.3268	33.58	9.98	43.56	56.00	-12.44	QP	
4		1.3268	15.70	9.98	25.68	46.00	-20.32	AVG	
5	*	1.6350	34.98	9.90	44.88	56.00	-11.12	QP	
6		1.6350	16.80	9.90	26.70	46.00	-19.30	AVG	
7		1.9073	34.79	9.87	44.66	56.00	-11.34	QP	
8		1.9073	15.90	9.87	25.77	46.00	-20.23	AVG	
9		4.6635	34.76	9.25	44.01	56.00	-11.99	QP	
10		4.6635	15.80	9.25	25.05	46.00	-20.95	AVG	
11		6.9810	34.72	9.96	44.68	60.00	-15.32	QP	
12		6.9810	16.40	9.96	26.36	50.00	-23.64	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight


Neutral

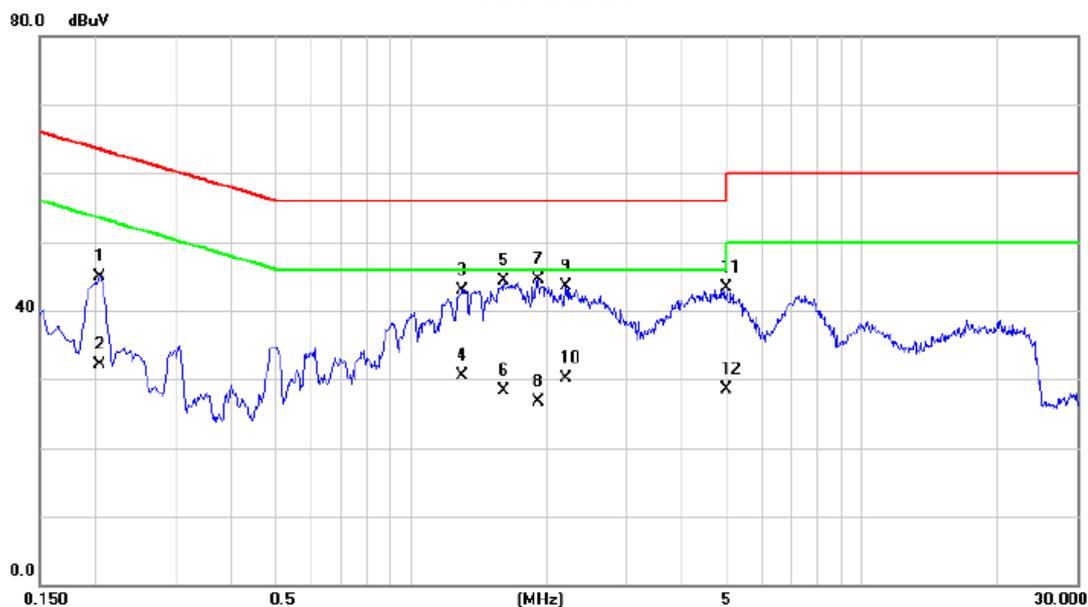

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2040	35.34	9.61	44.95	63.45	-18.50	QP	
2	0.2040	22.40	9.61	32.01	53.45	-21.44	AVG	
3	1.2975	33.16	9.81	42.97	56.00	-13.03	QP	
4	1.2975	20.60	9.81	30.41	46.00	-15.59	AVG	
5	1.6057	34.38	9.84	44.22	56.00	-11.78	QP	
6	1.6057	18.50	9.84	28.34	46.00	-17.66	AVG	
7 *	1.9095	34.58	9.91	44.49	56.00	-11.51	QP	
8	1.9095	16.70	9.91	26.61	46.00	-19.39	AVG	
9	2.2110	33.59	9.90	43.49	56.00	-12.51	QP	
10	2.2110	20.30	9.90	30.20	46.00	-15.80	AVG	
11	5.0190	33.19	10.10	43.29	60.00	-16.71	QP	
12	5.0190	18.50	10.10	28.60	50.00	-21.40	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle
Note:	USB Cable: PANG NGAI +Battery: Harbin Coslight


Line

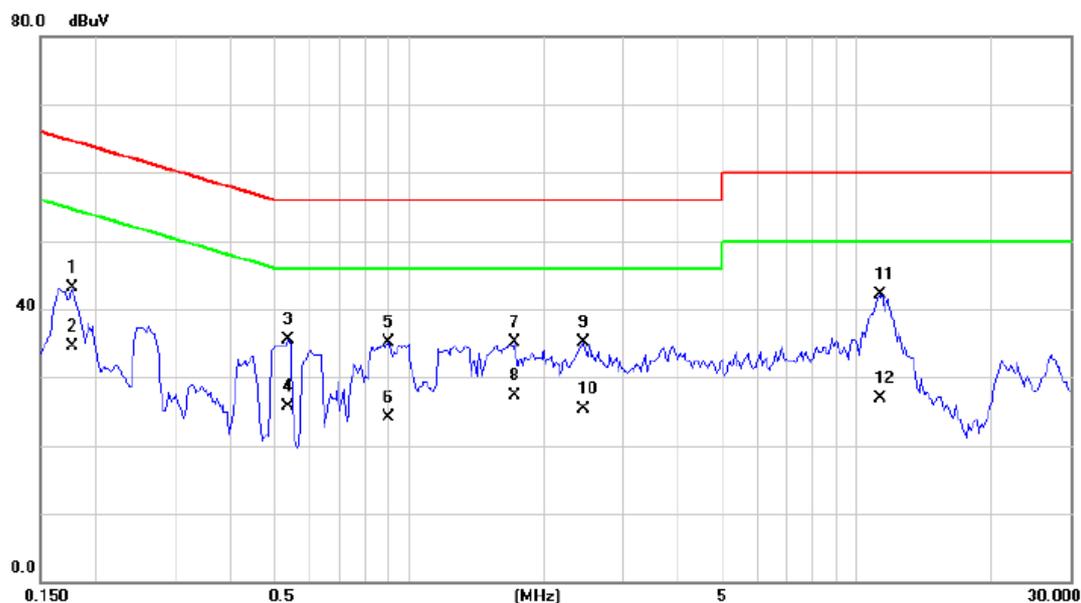

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1773	33.38	9.69	43.07	64.61	-21.54	QP	
2		0.1773	24.90	9.69	34.59	54.61	-20.02	AVG	
3		0.5366	25.70	9.84	35.54	56.00	-20.46	QP	
4		0.5366	15.80	9.84	25.64	46.00	-20.36	AVG	
5		0.8960	25.09	9.95	35.04	56.00	-20.96	QP	
6		0.8960	14.20	9.95	24.15	46.00	-21.85	AVG	
7		1.7241	25.18	9.89	35.07	56.00	-20.93	QP	
8		1.7241	17.50	9.89	27.39	46.00	-18.61	AVG	
9		2.4506	25.17	9.94	35.11	56.00	-20.89	QP	
10		2.4506	15.30	9.94	25.24	46.00	-20.76	AVG	
11	*	11.2571	31.93	10.11	42.04	60.00	-17.96	QP	
12		11.2571	16.80	10.11	26.91	50.00	-23.09	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle
Note:	USB Cable: PANG NGAI +Battery: Harbin Coslight

Neutral

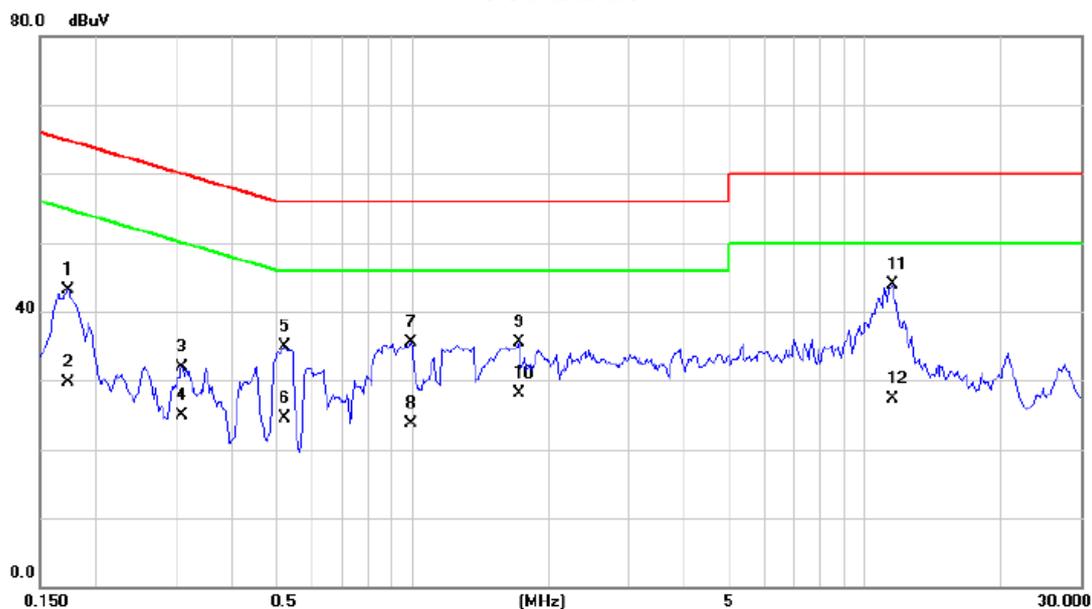

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1733	33.50	9.60	43.10	64.80	-21.70	QP	
2		0.1733	20.10	9.60	29.70	54.80	-25.10	AVG	
3		0.3100	22.28	9.63	31.91	59.97	-28.06	QP	
4		0.3100	15.30	9.63	24.93	49.97	-25.04	AVG	
5		0.5210	25.16	9.65	34.81	56.00	-21.19	QP	
6		0.5210	14.80	9.65	24.45	46.00	-21.55	AVG	
7		0.9898	25.73	9.79	35.52	56.00	-20.48	QP	
8		0.9898	13.90	9.79	23.69	46.00	-22.31	AVG	
9		1.7241	25.74	9.86	35.60	56.00	-20.40	QP	
10		1.7241	18.20	9.86	28.06	46.00	-17.94	AVG	
11	*	11.5234	33.83	10.11	43.94	60.00	-16.06	QP	
12		11.5234	17.20	10.11	27.31	50.00	-22.69	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		45.5200	34.98	-13.68	21.30	40.00	-18.70	QP	
2		149.3100	38.57	-14.07	24.50	43.50	-19.00	QP	
3	*	157.0700	44.18	-13.96	30.22	43.50	-13.28	QP	
4		209.4500	43.15	-16.57	26.58	43.50	-16.92	QP	
5		246.3100	37.55	-15.19	22.36	46.00	-23.64	QP	
6		492.6900	33.52	-9.36	24.16	46.00	-21.84	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Pihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H

Horizontal

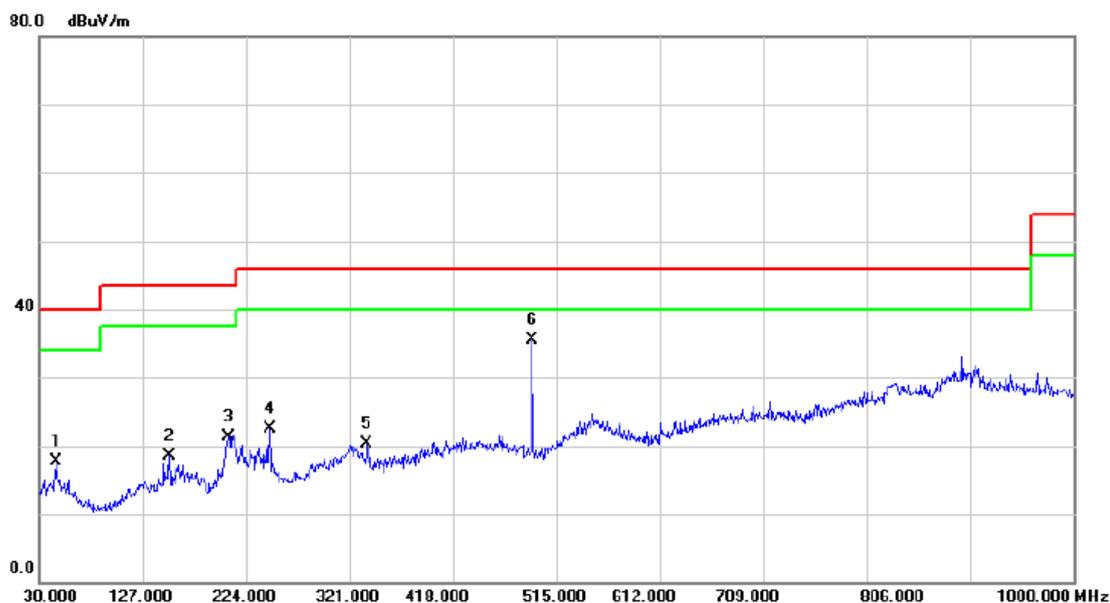

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		46.4900	31.35	-13.69	17.66	40.00	-22.34	QP	
2		152.2200	32.57	-14.03	18.54	43.50	-24.96	QP	
3		207.5100	37.83	-16.60	21.23	43.50	-22.27	QP	
4		246.3100	37.60	-15.19	22.41	46.00	-23.59	QP	
5		337.4900	32.79	-12.52	20.27	46.00	-25.73	QP	
6	*	492.6900	44.94	-9.36	35.58	46.00	-10.42	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Pihong +USB Cable: PANG NGAI +Battery: Harbin Coslight V


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	47.4600	35.15	-13.69	21.46	40.00	-18.54	QP	
2		156.1000	34.69	-13.97	20.72	43.50	-22.78	QP	
3		209.4500	41.22	-16.57	24.65	43.50	-18.85	QP	
4		246.3100	38.53	-15.19	23.34	46.00	-22.66	QP	
5		270.5600	33.43	-14.19	19.24	46.00	-26.76	QP	
6		358.8300	34.30	-12.10	22.20	46.00	-23.80	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Pihong +USB Cable: PANG NGAI +Battery: Harbin Coslight V


Horizontal

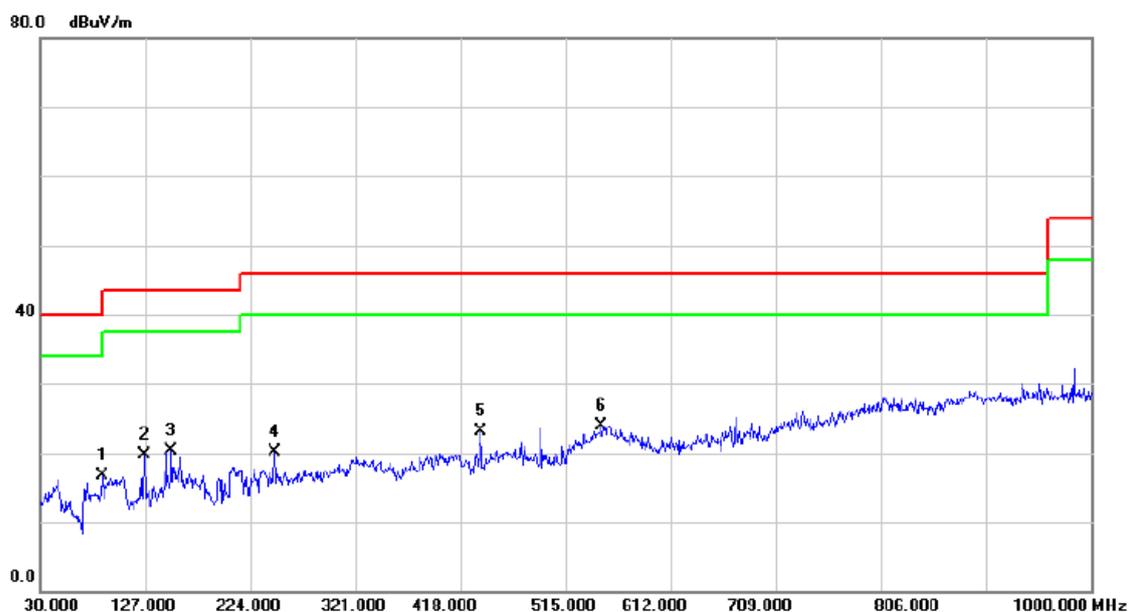

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		87.2300	36.44	-19.70	16.74	40.00	-23.26	QP	
2		126.0300	35.46	-15.67	19.79	43.50	-23.71	QP	
3		151.2500	34.40	-14.04	20.36	43.50	-23.14	QP	
4		246.3100	35.38	-15.19	20.19	46.00	-25.81	QP	
5		436.4300	33.06	-10.05	23.01	46.00	-22.99	QP	
6	*	547.9800	31.87	-8.04	23.83	46.00	-22.17	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: BYD +USB Cable: Unirise +Battery: Harbin SCUD H

Vertical

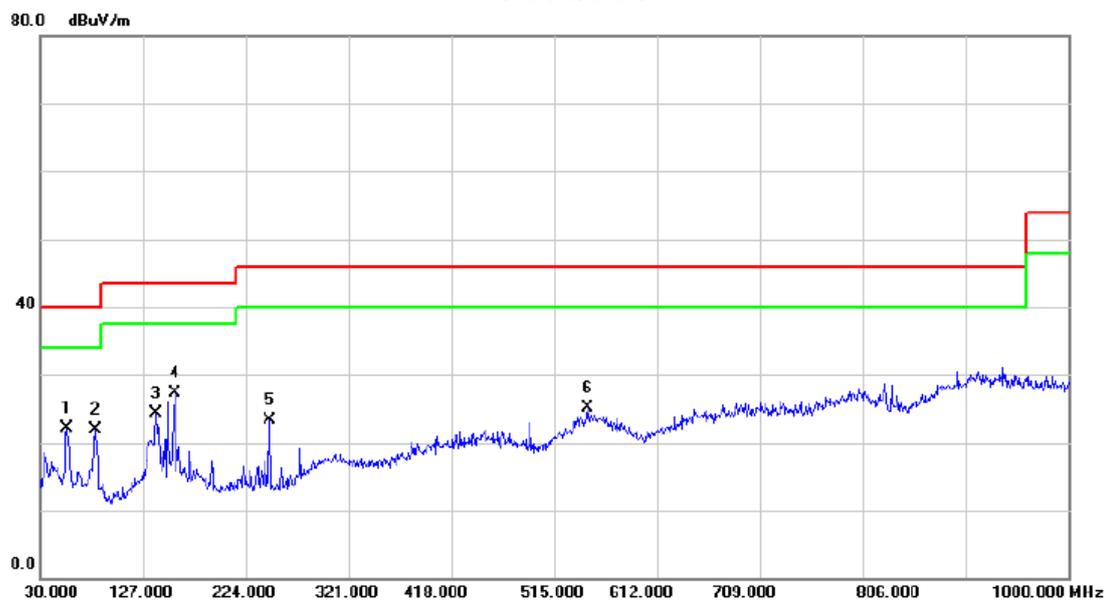

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		55.2200	36.27	-14.24	22.03	40.00	-17.97	QP	
2		82.3800	40.47	-18.63	21.84	40.00	-18.16	QP	
3		139.6100	38.80	-14.48	24.32	43.50	-19.18	QP	
4	*	157.0700	41.18	-13.96	27.22	43.50	-16.28	QP	
5		246.3100	38.40	-15.19	23.21	46.00	-22.79	QP	
6		546.0400	33.10	-8.08	25.02	46.00	-20.98	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: BYD +USB Cable: Unirise +Battery: Harbin SCUD H


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		46.4900	32.06	-13.69	18.37	40.00	-21.63	QP	
2		152.2200	34.45	-14.03	20.42	43.50	-23.08	QP	
3	*	246.3100	46.70	-15.19	31.51	46.00	-14.49	QP	
4		366.5900	32.39	-11.93	20.46	46.00	-25.54	QP	
5		473.2900	33.67	-9.50	24.17	46.00	-21.83	QP	
6		637.2200	32.50	-7.05	25.45	46.00	-20.55	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Huntkey +USB Cable: Connrex +Battery: Sunwoda H


Vertical

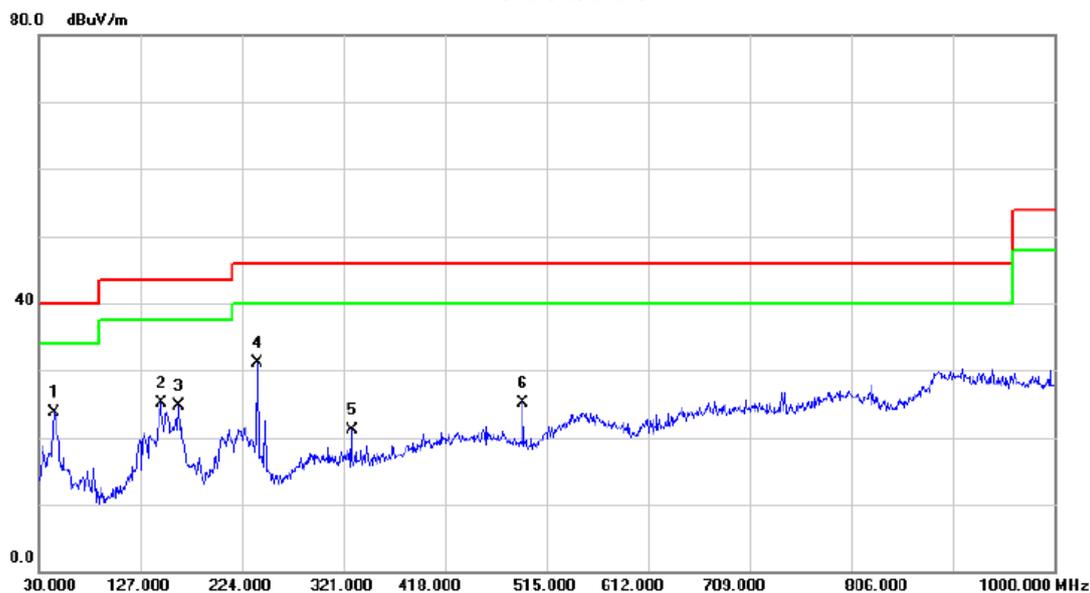

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		44.5500	37.39	-13.73	23.66	40.00	-16.34	QP	
2		146.4000	39.30	-14.18	25.12	43.50	-18.38	QP	
3		163.8600	38.90	-14.11	24.79	43.50	-18.71	QP	
4	*	238.5500	46.46	-15.34	31.12	46.00	-14.88	QP	
5		328.7600	33.77	-12.74	21.03	46.00	-24.97	QP	
6		492.6900	34.56	-9.36	25.20	46.00	-20.80	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Huntkey +USB Cable: Connrex +Battery: Sunwoda H


Horizontal

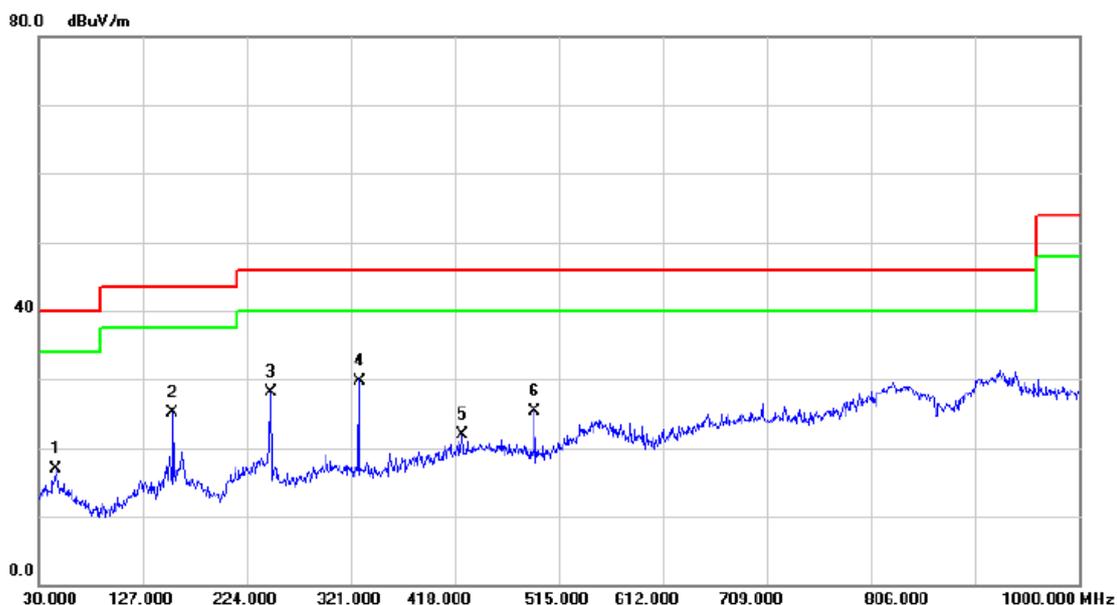

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		45.5200	30.67	-13.68	16.99	40.00	-23.01	QP	
2		155.1300	39.03	-13.99	25.04	43.50	-18.46	QP	
3		246.3100	43.25	-15.19	28.06	46.00	-17.94	QP	
4	*	328.7600	42.54	-12.74	29.80	46.00	-16.20	QP	
5		424.7900	32.23	-10.39	21.84	46.00	-24.16	QP	
6		492.6900	34.71	-9.36	25.35	46.00	-20.65	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Vertical

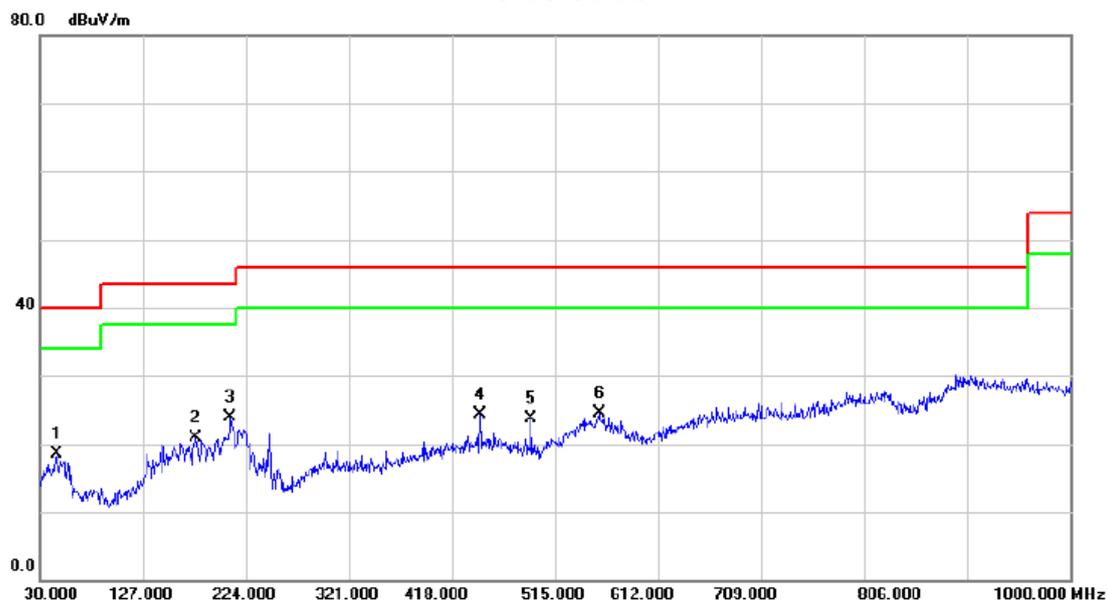

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		45.5200	32.12	-13.68	18.44	40.00	-21.56	QP	
2		176.4700	35.93	-15.07	20.86	43.50	-22.64	QP	
3	*	209.4500	40.52	-16.57	23.95	43.50	-19.55	QP	
4		444.1900	34.23	-9.83	24.40	46.00	-21.60	QP	
5		492.6900	33.03	-9.36	23.67	46.00	-22.33	QP	
6		556.7100	32.42	-7.91	24.51	46.00	-21.49	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H

Horizontal

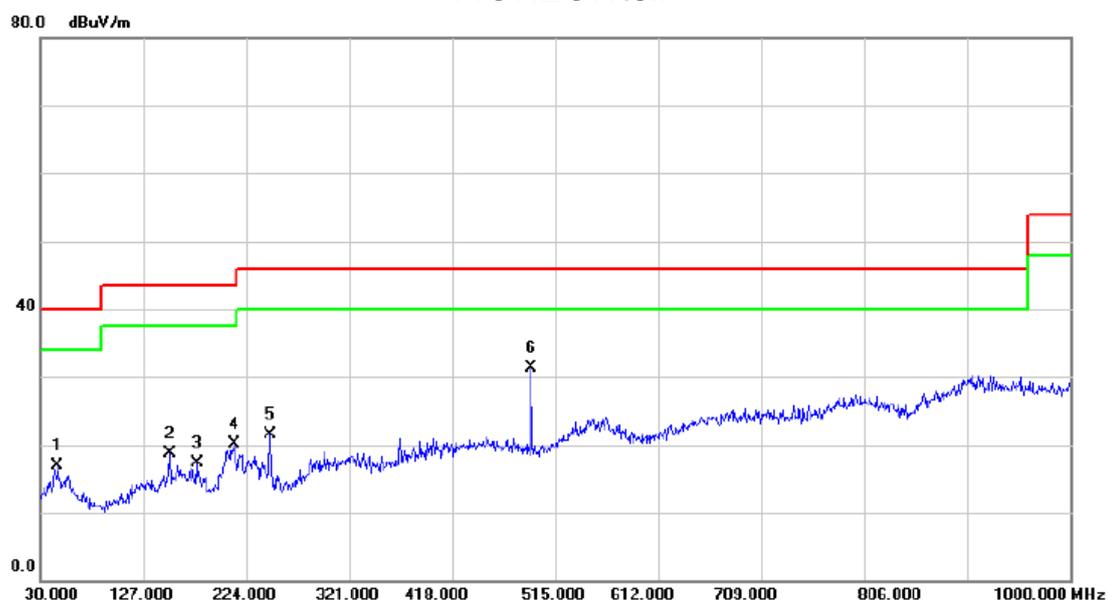

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		46.4900	30.51	-13.69	16.82	40.00	-23.18	QP	
2		152.2200	32.81	-14.03	18.78	43.50	-24.72	QP	
3		177.4400	32.38	-15.16	17.22	43.50	-26.28	QP	
4		212.3600	36.71	-16.56	20.15	43.50	-23.35	QP	
5		246.3100	36.67	-15.19	21.48	46.00	-24.52	QP	
6	*	492.6900	40.72	-9.36	31.36	46.00	-14.64	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: Pihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		44.5500	34.93	-13.73	21.20	40.00	-18.80	QP	
2		146.4000	38.10	-14.18	23.92	43.50	-19.58	QP	
3		176.4700	40.00	-15.07	24.93	43.50	-18.57	QP	
4	*	210.4200	41.94	-16.56	25.38	43.50	-18.12	QP	
5		246.3100	37.03	-15.19	21.84	46.00	-24.16	QP	
6		390.8400	35.28	-11.33	23.95	46.00	-22.05	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: Pihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Horizontal

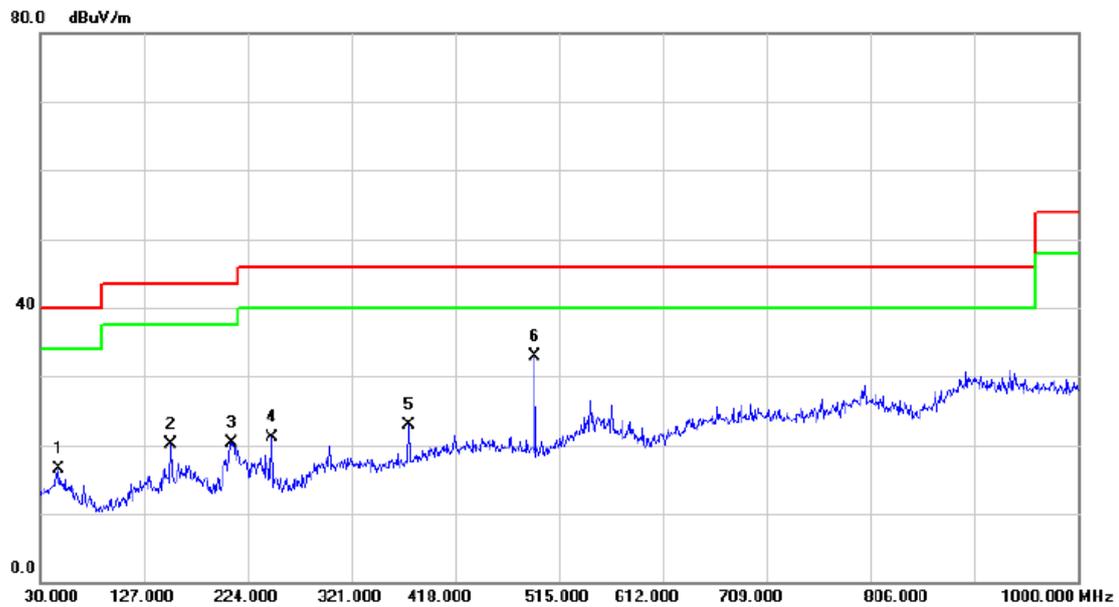

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	47.4600	30.21	-13.69	16.52	40.00	-23.48	QP	
2	152.2200	34.15	-14.03	20.12	43.50	-23.38	QP	
3	208.4800	36.99	-16.59	20.40	43.50	-23.10	QP	
4	246.3100	36.24	-15.19	21.05	46.00	-24.95	QP	
5	374.3500	34.67	-11.74	22.93	46.00	-23.07	QP	
6 *	492.6900	42.32	-9.36	32.96	46.00	-13.04	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H

Vertical

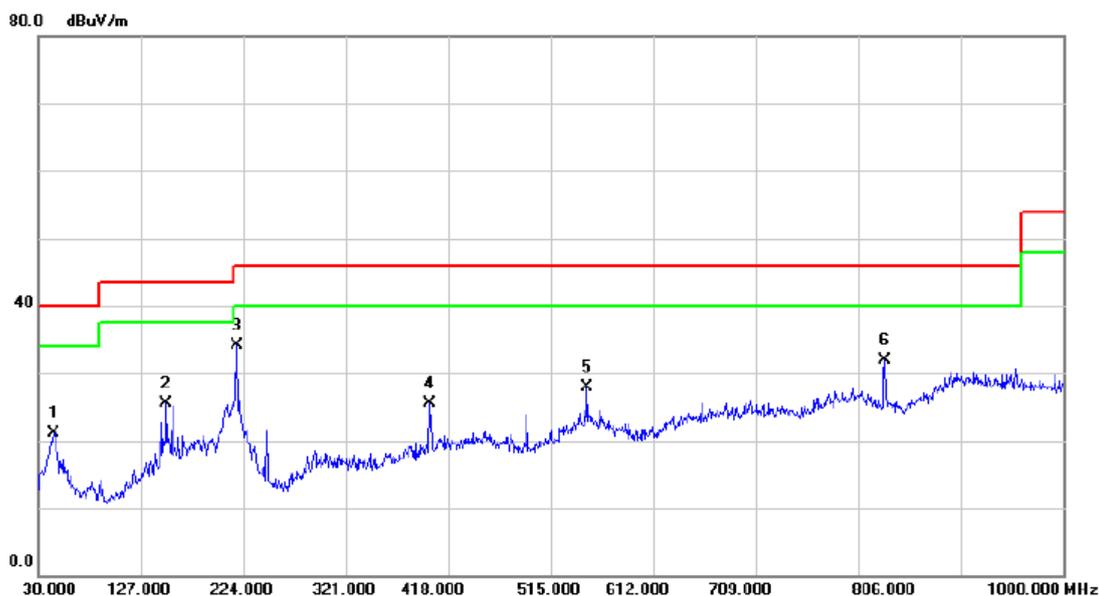

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		44.5500	34.88	-13.73	21.15	40.00	-18.85	QP	
2		151.2500	39.53	-14.04	25.49	43.50	-18.01	QP	
3	*	218.1800	50.65	-16.57	34.08	46.00	-11.92	QP	
4		400.5400	36.60	-11.08	25.52	46.00	-20.48	QP	
5		549.9200	35.85	-7.98	27.87	46.00	-18.13	QP	
6		831.2200	36.01	-4.18	31.83	46.00	-14.17	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: Pihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		47.4600	30.44	-13.69	16.75	40.00	-23.25	QP	
2		126.0300	31.56	-15.67	15.89	43.50	-27.61	QP	
3		152.2200	32.02	-14.03	17.99	43.50	-25.51	QP	
4		208.4800	36.99	-16.59	20.40	43.50	-23.10	QP	
5		246.3100	35.85	-15.19	20.66	46.00	-25.34	QP	
6	*	492.6900	43.18	-9.36	33.82	46.00	-12.18	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H

Vertical

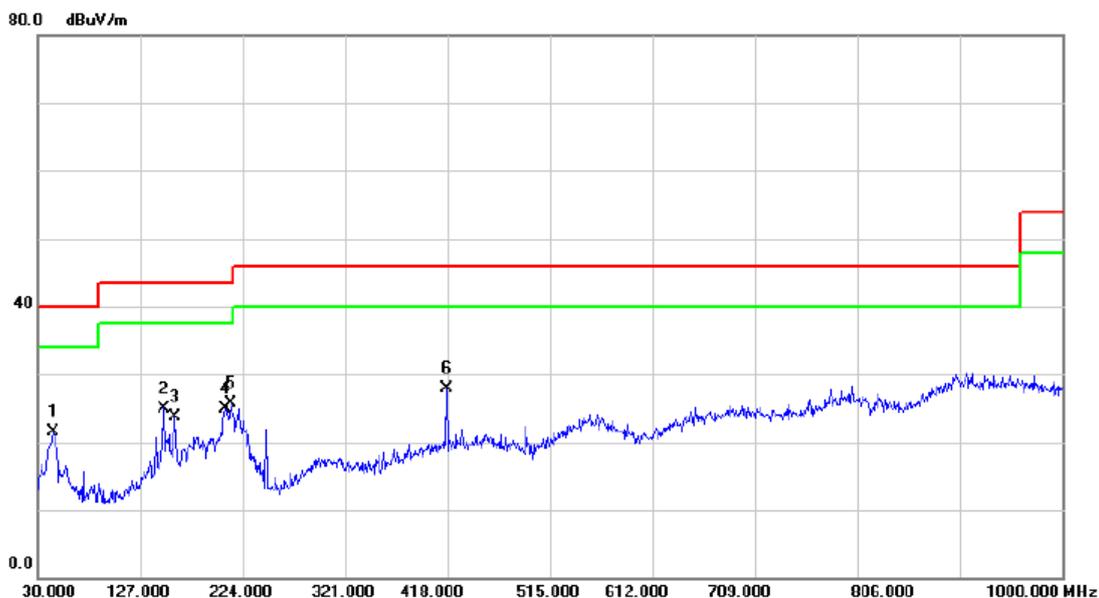

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		44.5500	35.22	-13.73	21.49	40.00	-18.51	QP	
2		149.3100	39.07	-14.07	25.00	43.50	-18.50	QP	
3		159.9800	37.60	-13.92	23.68	43.50	-19.82	QP	
4		207.5100	41.43	-16.60	24.83	43.50	-18.67	QP	
5	*	212.3600	42.35	-16.56	25.79	43.50	-17.71	QP	
6		417.0300	38.48	-10.61	27.87	46.00	-18.13	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: Pihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		46.4900	29.52	-13.69	15.83	40.00	-24.17	QP	
2		152.2200	33.83	-14.03	19.80	43.50	-23.70	QP	
3		212.3600	37.58	-16.56	21.02	43.50	-22.48	QP	
4		246.3100	35.98	-15.19	20.79	46.00	-25.21	QP	
5		374.3500	32.77	-11.74	21.03	46.00	-24.97	QP	
6	*	492.6900	42.95	-9.36	33.59	46.00	-12.41	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle
Note:	USB Cable: PANG NGAI +Battery: Harbin Coslight H


Vertical

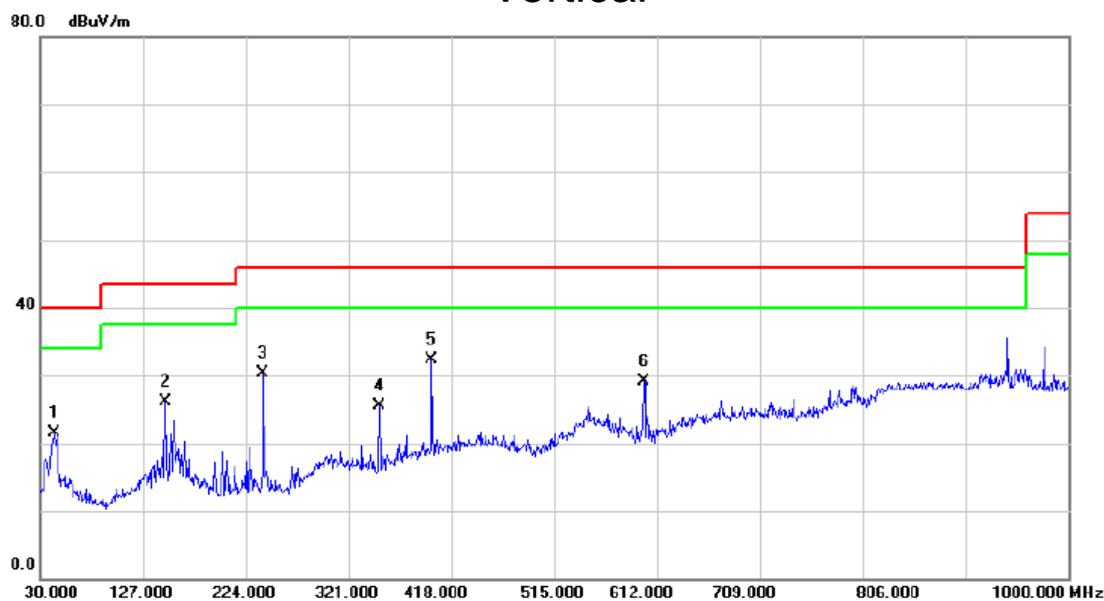

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		43.5800	35.35	-13.82	21.53	40.00	-18.47	QP	
2		148.3400	40.17	-14.11	26.06	43.50	-17.44	QP	
3		240.4900	45.50	-15.25	30.25	46.00	-15.75	QP	
4		350.1000	37.76	-12.25	25.51	46.00	-20.49	QP	
5	*	399.5700	43.50	-11.10	32.40	46.00	-13.60	QP	
6		599.3900	36.50	-7.47	29.03	46.00	-16.97	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle
Note:	USB Cable: PANG NGAI +Battery: Harbin Coslight H

Horizontal

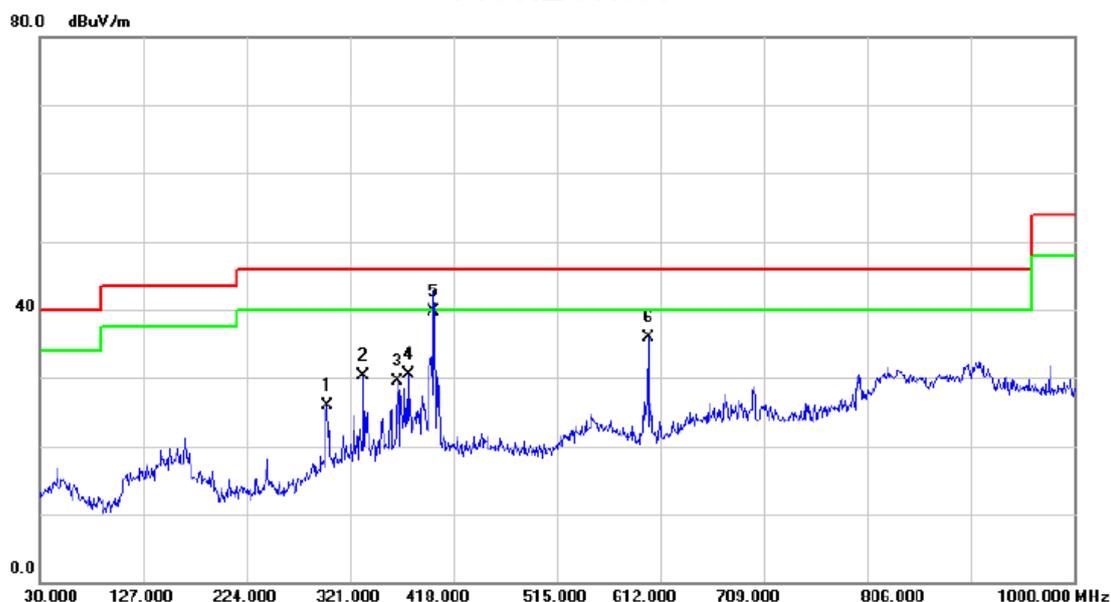


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		299.6600	39.46	-13.50	25.96	46.00	-20.04	QP	
2		333.6100	43.02	-12.62	30.40	46.00	-15.60	QP	
3		365.6200	41.45	-11.95	29.50	46.00	-16.50	QP	
4		375.3200	42.30	-11.71	30.59	46.00	-15.41	QP	
5	*	399.5700	50.83	-11.10	39.73	46.00	-6.27	QP	
6		600.3600	43.39	-7.46	35.93	46.00	-10.07	QP	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Vertical

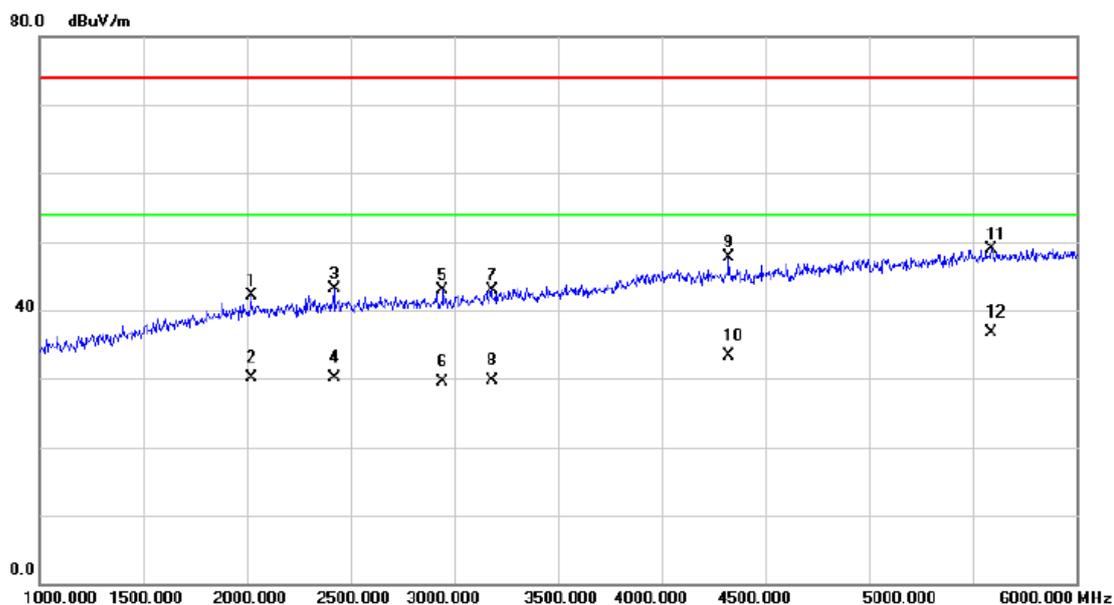

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2020.000	43.94	-1.80	42.14	74.00	-31.86	peak	
2		2020.000	31.87	-1.80	30.07	54.00	-23.93	AVG	
3		2420.000	43.25	-0.23	43.02	74.00	-30.98	peak	
4		2420.000	30.30	-0.23	30.07	54.00	-23.93	AVG	
5		2945.000	41.22	1.65	42.87	74.00	-31.13	peak	
6		2945.000	27.83	1.65	29.48	54.00	-24.52	AVG	
7		3180.000	40.64	2.26	42.90	74.00	-31.10	peak	
8		3180.000	27.51	2.26	29.77	54.00	-24.23	AVG	
9		4325.000	40.97	6.81	47.78	74.00	-26.22	peak	
10		4325.000	26.47	6.81	33.28	54.00	-20.72	AVG	
11		5590.000	39.67	9.25	48.92	74.00	-25.08	peak	
12	*	5590.000	27.53	9.25	36.78	54.00	-17.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Horizontal

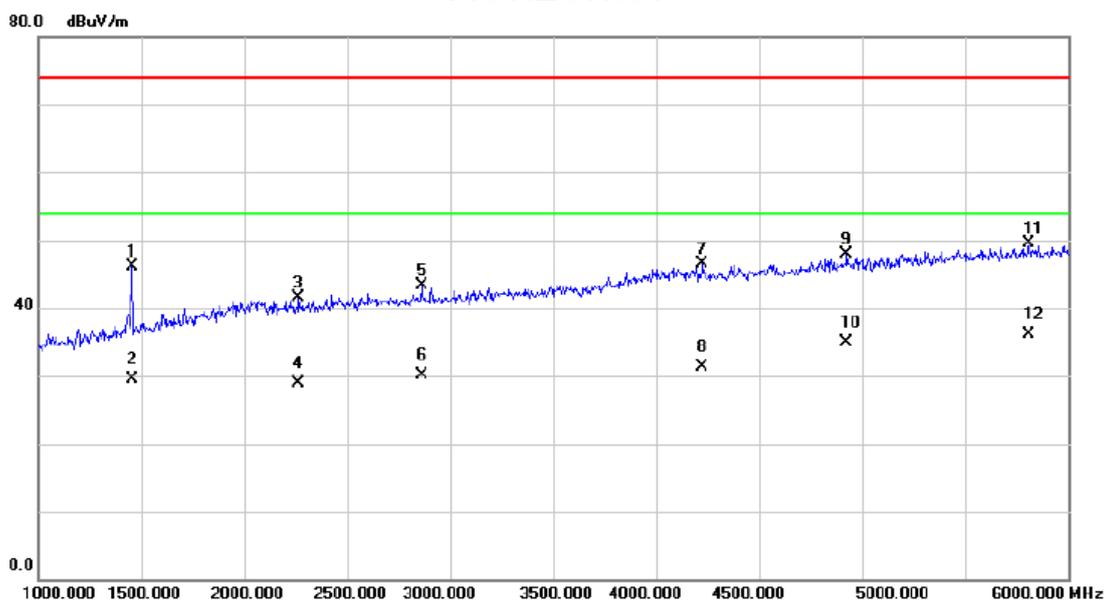

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1455.000	50.21	-4.19	46.02	74.00	-27.98	peak	
2		1455.000	33.67	-4.19	29.48	54.00	-24.52	AVG	
3		2265.000	42.43	-0.84	41.59	74.00	-32.41	peak	
4		2265.000	29.66	-0.84	28.82	54.00	-25.18	AVG	
5		2860.000	41.88	1.34	43.22	74.00	-30.78	peak	
6		2860.000	28.75	1.34	30.09	54.00	-23.91	AVG	
7		4225.000	39.72	6.76	46.48	74.00	-27.52	peak	
8		4225.000	24.60	6.76	31.36	54.00	-22.64	AVG	
9		4925.000	40.34	7.53	47.87	74.00	-26.13	peak	
10		4925.000	27.32	7.53	34.85	54.00	-19.15	AVG	
11		5810.000	39.95	9.52	49.47	74.00	-24.53	peak	
12	*	5810.000	26.68	9.52	36.20	54.00	-17.80	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Vertical

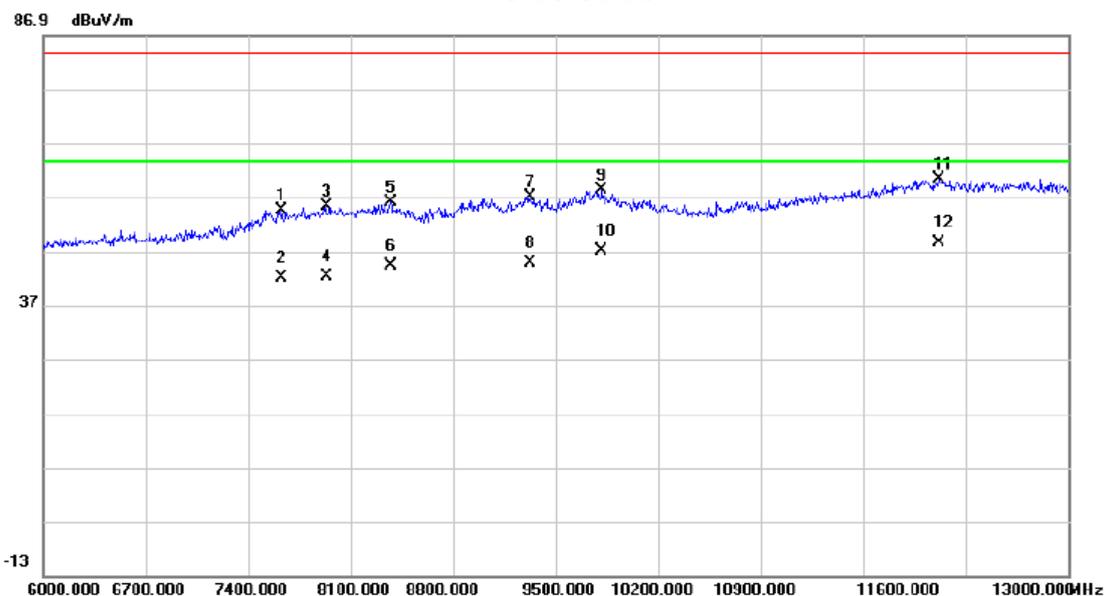

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7631.000	38.58	16.01	54.59	83.50	-28.91	peak	
2		7631.000	26.06	16.01	42.07	63.50	-21.43	AVG	
3		7932.000	39.16	16.08	55.24	83.50	-28.26	peak	
4		7932.000	26.30	16.08	42.38	63.50	-21.12	AVG	
5		8373.000	40.48	15.57	56.05	83.50	-27.45	peak	
6		8373.000	28.67	15.57	44.24	63.50	-19.26	AVG	
7		9325.000	41.59	15.52	57.11	83.50	-26.39	peak	
8		9325.000	29.22	15.52	44.74	63.50	-18.76	AVG	
9		9815.000	42.47	15.72	58.19	83.50	-25.31	peak	
10		9815.000	31.24	15.72	46.96	63.50	-16.54	AVG	
11		12118.00	38.24	21.99	60.23	83.50	-23.27	peak	
12	*	12118.00	26.65	21.99	48.64	63.50	-14.86	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Pihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Horizontal

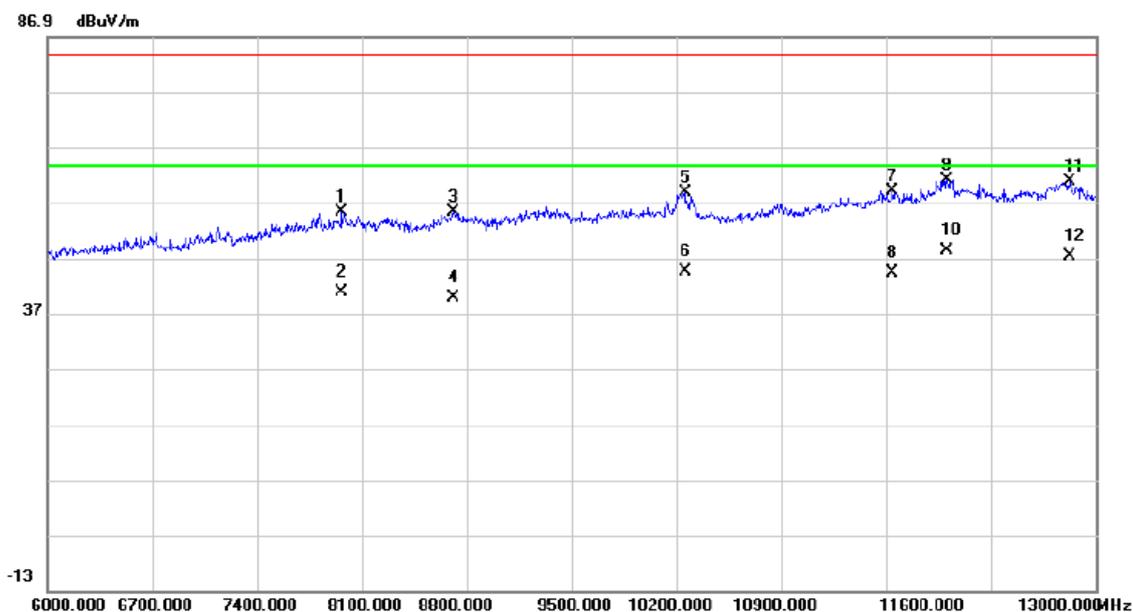

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7967.000	39.09	16.08	55.17	83.50	-28.33	peak	
2		7967.000	24.69	16.08	40.77	63.50	-22.73	AVG	
3		8709.000	39.58	15.72	55.30	83.50	-28.20	peak	
4		8709.000	24.03	15.72	39.75	63.50	-23.75	AVG	
5		10256.000	43.77	15.00	58.77	83.50	-24.73	peak	
6		10256.000	29.47	15.00	44.47	63.50	-19.03	AVG	
7		11642.000	37.98	21.05	59.03	83.50	-24.47	peak	
8		11642.000	23.27	21.05	44.32	63.50	-19.18	AVG	
9		12006.000	37.87	23.25	61.12	83.50	-22.38	peak	
10	*	12006.000	24.97	23.25	48.22	63.50	-15.28	AVG	
11		12825.000	40.42	20.42	60.84	83.50	-22.66	peak	
12		12825.000	26.89	20.42	47.31	63.50	-16.19	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight V


Vertical

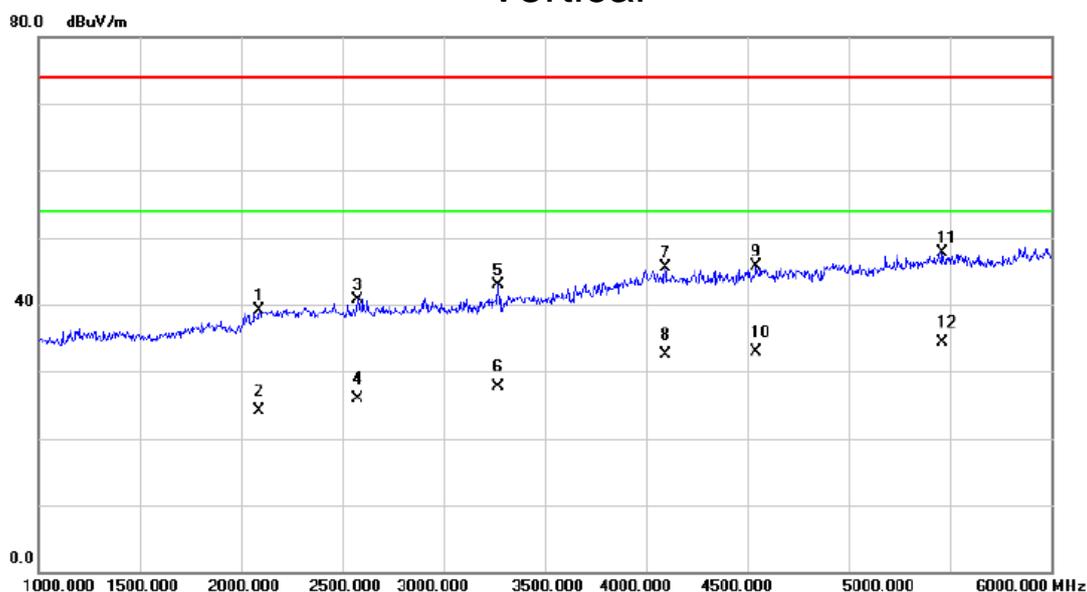

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2090.000	40.62	-1.52	39.10	74.00	-34.90	peak	
2		2090.000	25.55	-1.52	24.03	54.00	-29.97	AVG	
3		2575.000	40.43	0.35	40.78	74.00	-33.22	peak	
4		2575.000	25.59	0.35	25.94	54.00	-28.06	AVG	
5		3270.000	40.39	2.47	42.86	74.00	-31.14	peak	
6		3270.000	25.16	2.47	27.63	54.00	-26.37	AVG	
7		4095.000	38.86	6.68	45.54	74.00	-28.46	peak	
8		4095.000	25.86	6.68	32.54	54.00	-21.46	AVG	
9		4545.000	38.78	6.98	45.76	74.00	-28.24	peak	
10		4545.000	25.96	6.98	32.94	54.00	-21.06	AVG	
11		5465.000	38.73	9.04	47.77	74.00	-26.23	peak	
12	*	5465.000	25.33	9.04	34.37	54.00	-19.63	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight V


Horizontal

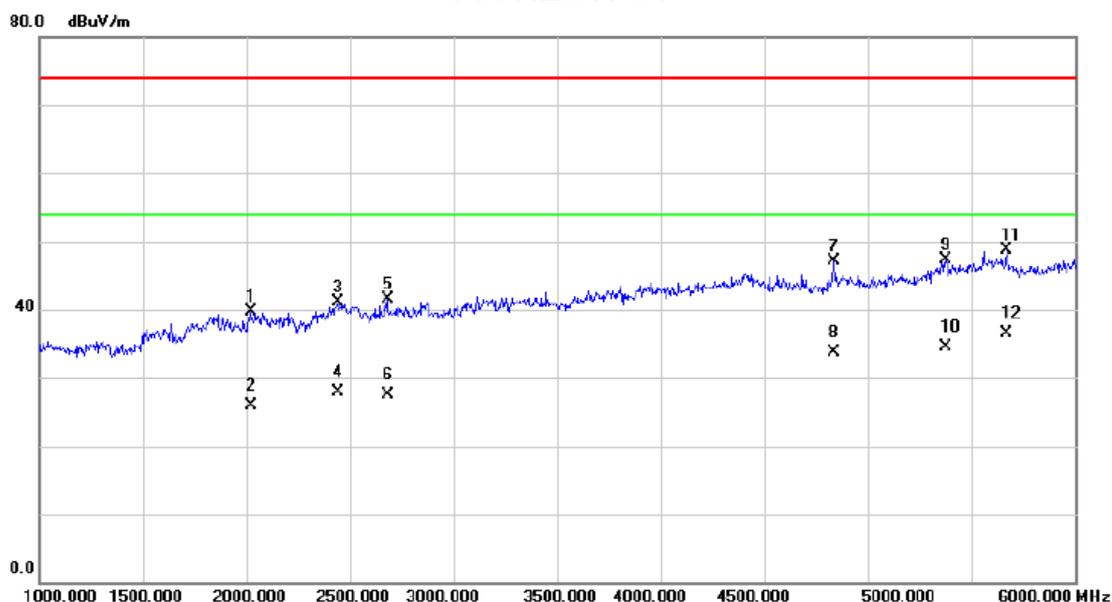

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2020.000	41.58	-1.80	39.78	74.00	-34.22	peak	
2		2020.000	27.75	-1.80	25.95	54.00	-28.05	AVG	
3		2440.000	41.22	-0.16	41.06	74.00	-32.94	peak	
4		2440.000	27.98	-0.16	27.82	54.00	-26.18	AVG	
5		2680.000	40.76	0.72	41.48	74.00	-32.52	peak	
6		2680.000	26.82	0.72	27.54	54.00	-26.46	AVG	
7		4835.000	39.77	7.41	47.18	74.00	-26.82	peak	
8		4835.000	26.21	7.41	33.62	54.00	-20.38	AVG	
9		5375.000	38.51	8.77	47.28	74.00	-26.72	peak	
10		5375.000	25.73	8.77	34.50	54.00	-19.50	AVG	
11		5670.000	39.29	9.35	48.64	74.00	-25.36	peak	
12	*	5670.000	27.06	9.35	36.41	54.00	-17.59	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: BYD +USB Cable: Unirise +Battery: Harbin SCUD H


Vertical

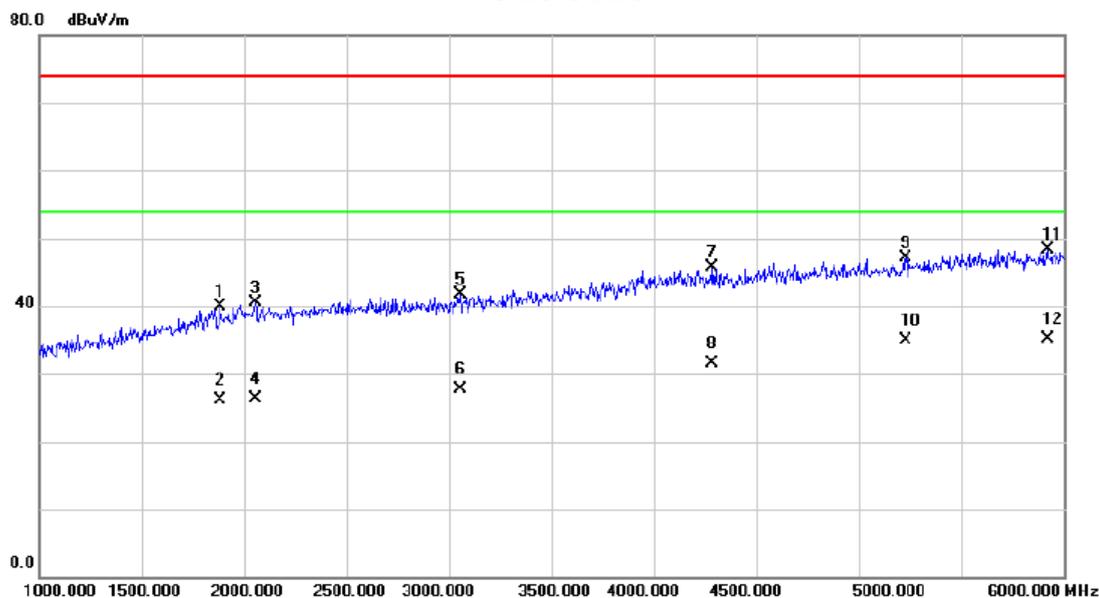

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1885.000	42.21	-2.38	39.83	74.00	-34.17	peak	
2		1885.000	28.49	-2.38	26.11	54.00	-27.89	AVG	
3		2055.000	42.10	-1.66	40.44	74.00	-33.56	peak	
4		2055.000	28.06	-1.66	26.40	54.00	-27.60	AVG	
5		3055.000	39.81	1.97	41.78	74.00	-32.22	peak	
6		3055.000	25.74	1.97	27.71	54.00	-26.29	AVG	
7		4285.000	38.96	6.80	45.76	74.00	-28.24	peak	
8		4285.000	24.72	6.80	31.52	54.00	-22.48	AVG	
9		5230.000	38.69	8.34	47.03	74.00	-26.97	peak	
10		5230.000	26.55	8.34	34.89	54.00	-19.11	AVG	
11		5920.000	38.68	9.66	48.34	74.00	-25.66	peak	
12	*	5920.000	25.41	9.66	35.07	54.00	-18.93	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: BYD +USB Cable: Unirise +Battery: Harbin SCUD H


Horizontal

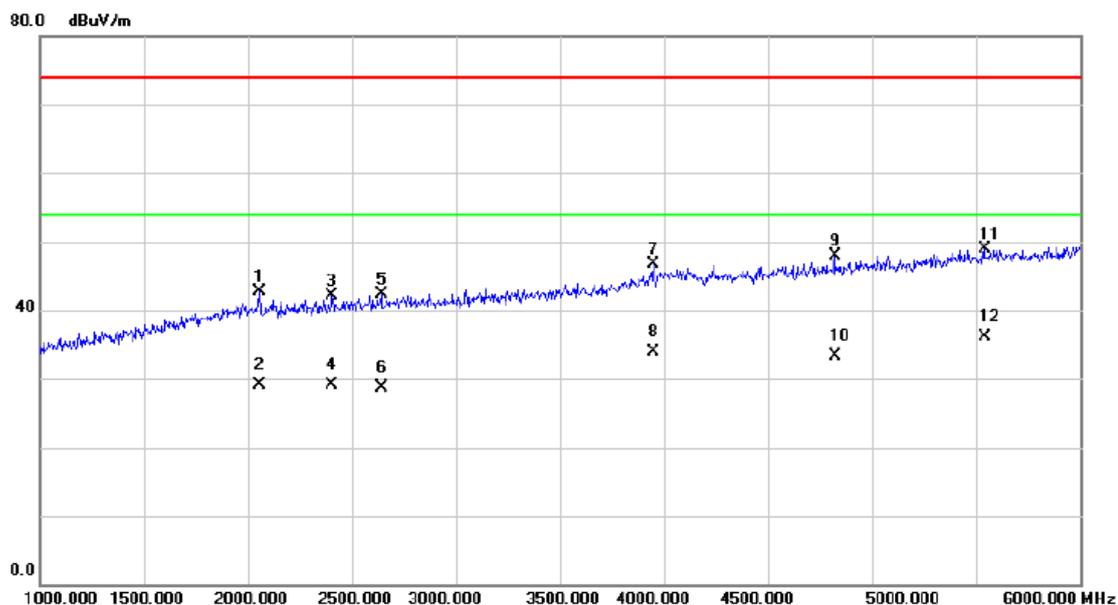

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2055.000	44.34	-1.66	42.68	74.00	-31.32	peak	
2	2055.000	30.73	-1.66	29.07	54.00	-24.93	AVG	
3	2405.000	42.30	-0.28	42.02	74.00	-31.98	peak	
4	2405.000	29.37	-0.28	29.09	54.00	-24.91	AVG	
5	2640.000	41.70	0.58	42.28	74.00	-31.72	peak	
6	2640.000	28.13	0.58	28.71	54.00	-25.29	AVG	
7	3950.000	40.36	6.26	46.62	74.00	-27.38	peak	
8	3950.000	27.56	6.26	33.82	54.00	-20.18	AVG	
9	4820.000	40.55	7.38	47.93	74.00	-26.07	peak	
10	4820.000	25.97	7.38	33.35	54.00	-20.65	AVG	
11	5540.000	39.63	9.19	48.82	74.00	-25.18	peak	
12 *	5540.000	26.90	9.19	36.09	54.00	-17.91	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Huntkey +USB Cable: Connrex +Battery: Sunwoda H


Vertical

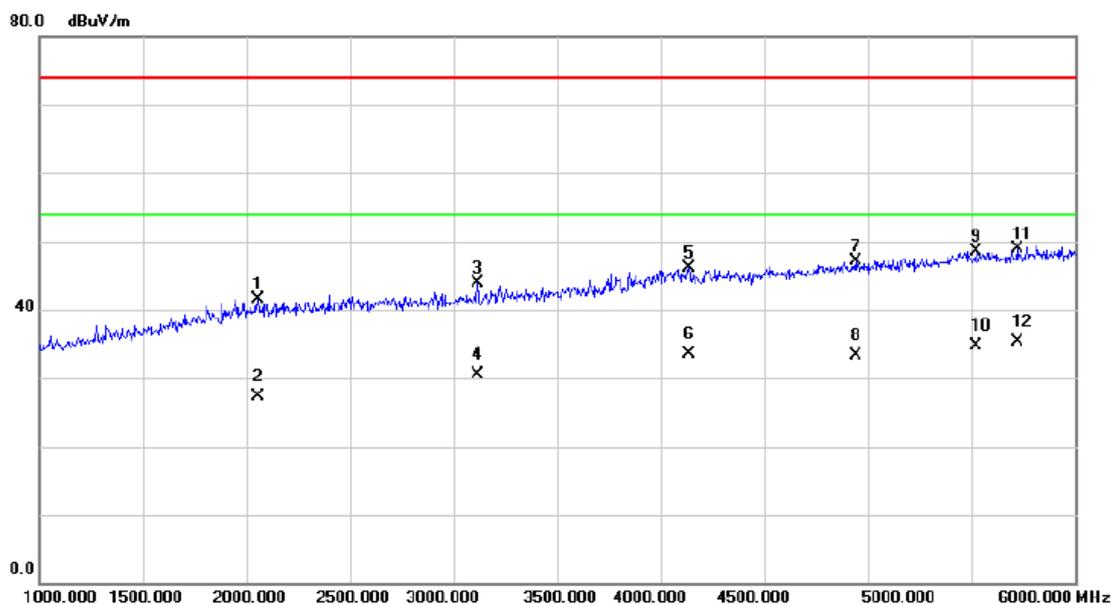

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2055.000	43.16	-1.66	41.50	74.00	-32.50	peak	
2		2055.000	29.06	-1.66	27.40	54.00	-26.60	AVG	
3		3115.000	41.74	2.11	43.85	74.00	-30.15	peak	
4		3115.000	28.46	2.11	30.57	54.00	-23.43	AVG	
5		4135.000	39.46	6.70	46.16	74.00	-27.84	peak	
6		4135.000	26.72	6.70	33.42	54.00	-20.58	AVG	
7		4940.000	39.55	7.55	47.10	74.00	-26.90	peak	
8		4940.000	25.78	7.55	33.33	54.00	-20.67	AVG	
9		5520.000	39.33	9.17	48.50	74.00	-25.50	peak	
10		5520.000	25.48	9.17	34.65	54.00	-19.35	AVG	
11		5720.000	39.57	9.41	48.98	74.00	-25.02	peak	
12	*	5720.000	25.84	9.41	35.25	54.00	-18.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+wifi+gps+bt
Note:	Adapter: Huntkey +USB Cable: Connrex +Battery: Sunwoda H


Horizontal

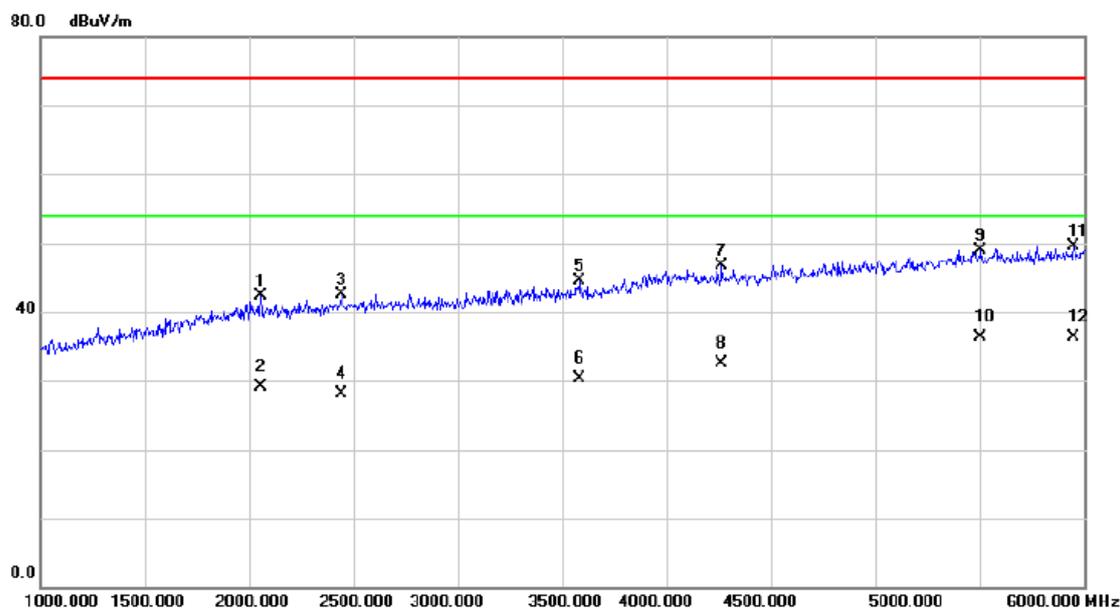

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2055.000	43.97	-1.66	42.31	74.00	-31.69	peak	
2	2055.000	30.74	-1.66	29.08	54.00	-24.92	AVG	
3	2440.000	42.74	-0.16	42.58	74.00	-31.42	peak	
4	2440.000	28.23	-0.16	28.07	54.00	-25.93	AVG	
5	3585.000	40.82	3.62	44.44	74.00	-29.56	peak	
6	3585.000	26.61	3.62	30.23	54.00	-23.77	AVG	
7	4265.000	39.91	6.78	46.69	74.00	-27.31	peak	
8	4265.000	25.82	6.78	32.60	54.00	-21.40	AVG	
9	5505.000	39.72	9.15	48.87	74.00	-25.13	peak	
10 *	5505.000	27.14	9.15	36.29	54.00	-17.71	AVG	
11	5950.000	39.80	9.69	49.49	74.00	-24.51	peak	
12	5950.000	26.54	9.69	36.23	54.00	-17.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Vertical

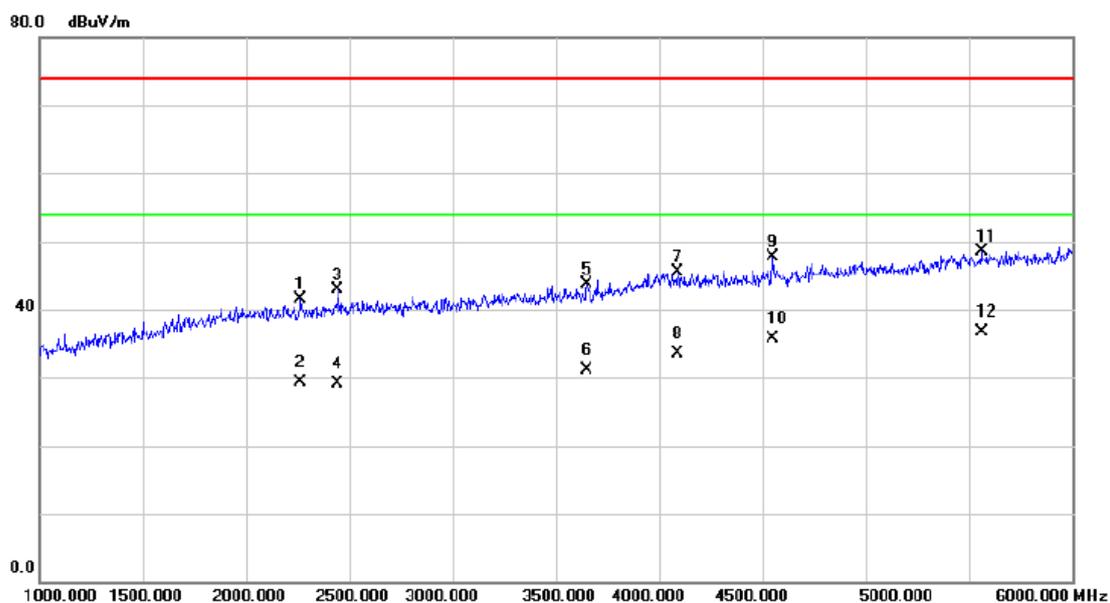

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2265.000	42.33	-0.84	41.49	74.00	-32.51	peak	
2		2265.000	30.15	-0.84	29.31	54.00	-24.69	AVG	
3		2445.000	43.06	-0.14	42.92	74.00	-31.08	peak	
4		2445.000	29.18	-0.14	29.04	54.00	-24.96	AVG	
5		3650.000	39.65	4.09	43.74	74.00	-30.26	peak	
6		3650.000	27.03	4.09	31.12	54.00	-22.88	AVG	
7		4090.000	38.88	6.68	45.56	74.00	-28.44	peak	
8		4090.000	26.87	6.68	33.55	54.00	-20.45	AVG	
9		4550.000	40.70	6.99	47.69	74.00	-26.31	peak	
10		4550.000	28.77	6.99	35.76	54.00	-18.24	AVG	
11		5560.000	39.35	9.22	48.57	74.00	-25.43	peak	
12	*	5560.000	27.51	9.22	36.73	54.00	-17.27	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Horizontal

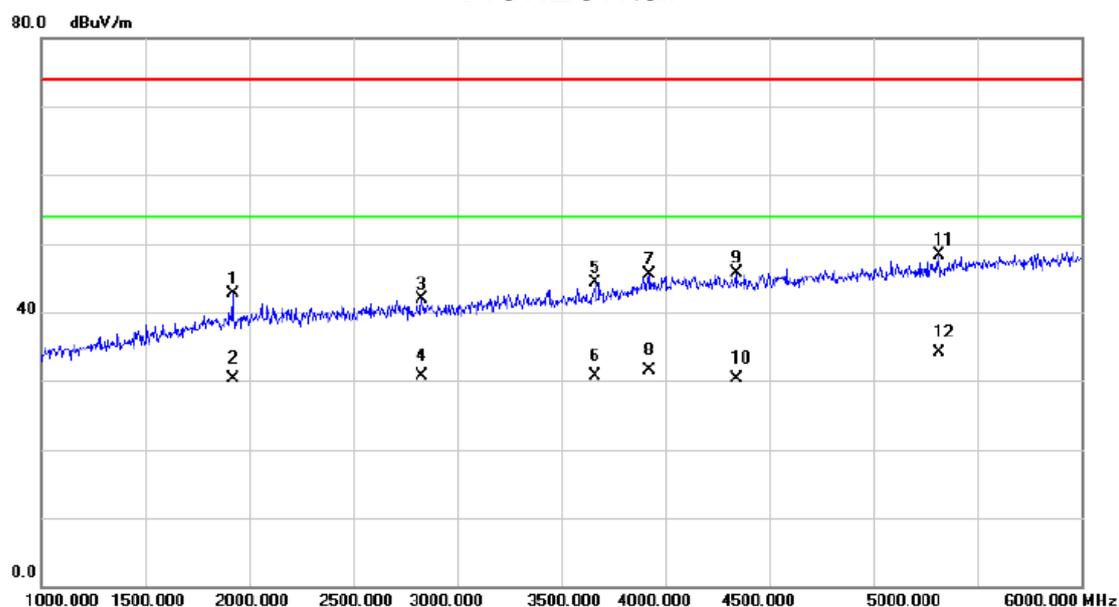

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1920.000	44.91	-2.23	42.68	74.00	-31.32	peak	
2		1920.000	32.57	-2.23	30.34	54.00	-23.66	AVG	
3		2830.000	40.67	1.24	41.91	74.00	-32.09	peak	
4		2830.000	29.52	1.24	30.76	54.00	-23.24	AVG	
5		3660.000	40.21	4.16	44.37	74.00	-29.63	peak	
6		3660.000	26.48	4.16	30.64	54.00	-23.36	AVG	
7		3925.000	39.34	6.08	45.42	74.00	-28.58	peak	
8		3925.000	25.41	6.08	31.49	54.00	-22.51	AVG	
9		4340.000	38.96	6.83	45.79	74.00	-28.21	peak	
10		4340.000	23.43	6.83	30.26	54.00	-23.74	AVG	
11		5315.000	39.75	8.59	48.34	74.00	-25.66	peak	
12	*	5315.000	25.43	8.59	34.02	54.00	-19.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Vertical

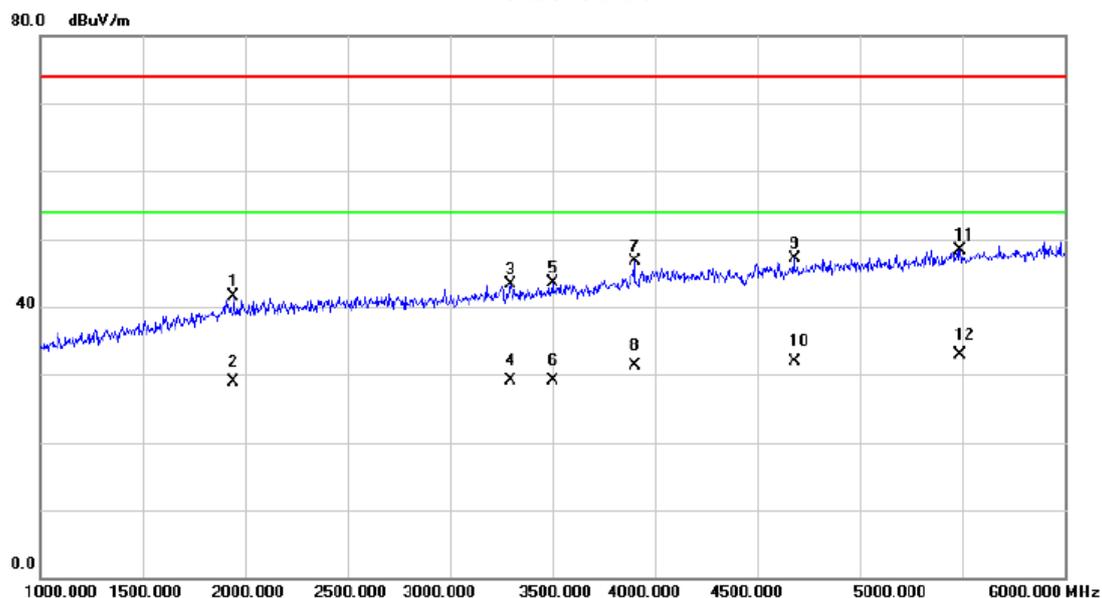

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1945.000	43.55	-2.12	41.43	74.00	-32.57	peak	
2		1945.000	31.11	-2.12	28.99	54.00	-25.01	AVG	
3		3295.000	40.69	2.52	43.21	74.00	-30.79	peak	
4		3295.000	26.62	2.52	29.14	54.00	-24.86	AVG	
5		3500.000	40.60	3.00	43.60	74.00	-30.40	peak	
6		3500.000	26.10	3.00	29.10	54.00	-24.90	AVG	
7		3900.000	40.72	5.89	46.61	74.00	-27.39	peak	
8		3900.000	25.37	5.89	31.26	54.00	-22.74	AVG	
9		4680.000	39.84	7.18	47.02	74.00	-26.98	peak	
10		4680.000	24.79	7.18	31.97	54.00	-22.03	AVG	
11		5490.000	39.29	9.11	48.40	74.00	-25.60	peak	
12	*	5490.000	23.88	9.11	32.99	54.00	-21.01	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: Pihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Horizontal

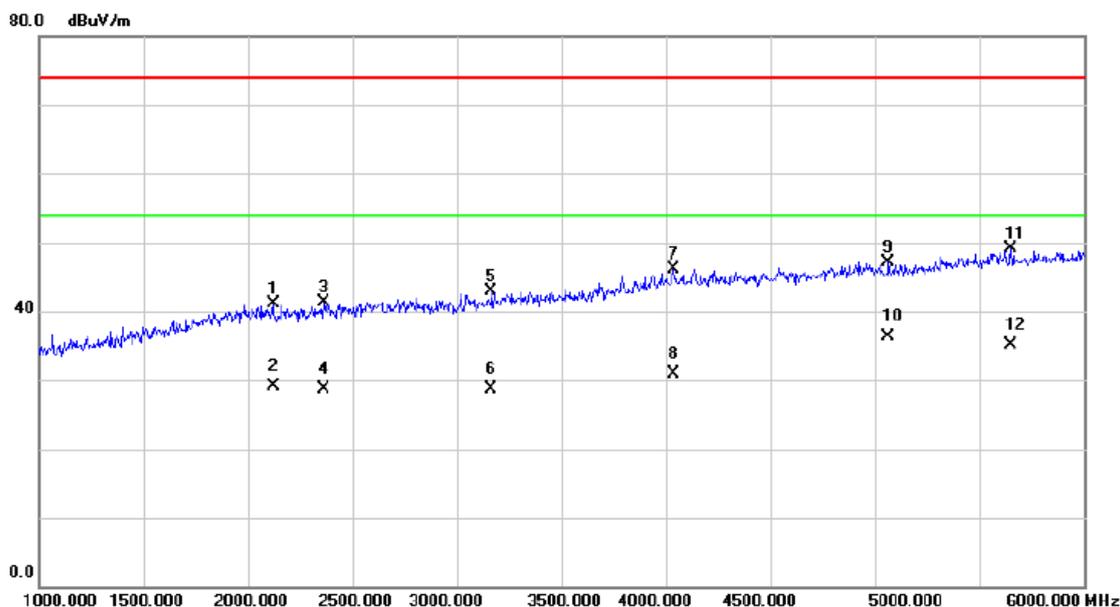

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2120.000	42.54	-1.41	41.13	74.00	-32.87	peak	
2	2120.000	30.56	-1.41	29.15	54.00	-24.85	AVG	
3	2365.000	41.71	-0.45	41.26	74.00	-32.74	peak	
4	2365.000	29.21	-0.45	28.76	54.00	-25.24	AVG	
5	3165.000	40.65	2.22	42.87	74.00	-31.13	peak	
6	3165.000	26.50	2.22	28.72	54.00	-25.28	AVG	
7	4035.000	39.49	6.65	46.14	74.00	-27.86	peak	
8	4035.000	24.17	6.65	30.82	54.00	-23.18	AVG	
9	5065.000	39.27	7.84	47.11	74.00	-26.89	peak	
10 *	5065.000	28.51	7.84	36.35	54.00	-17.65	AVG	
11	5650.000	39.84	9.32	49.16	74.00	-24.84	peak	
12	5650.000	25.78	9.32	35.10	54.00	-18.90	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Vertical

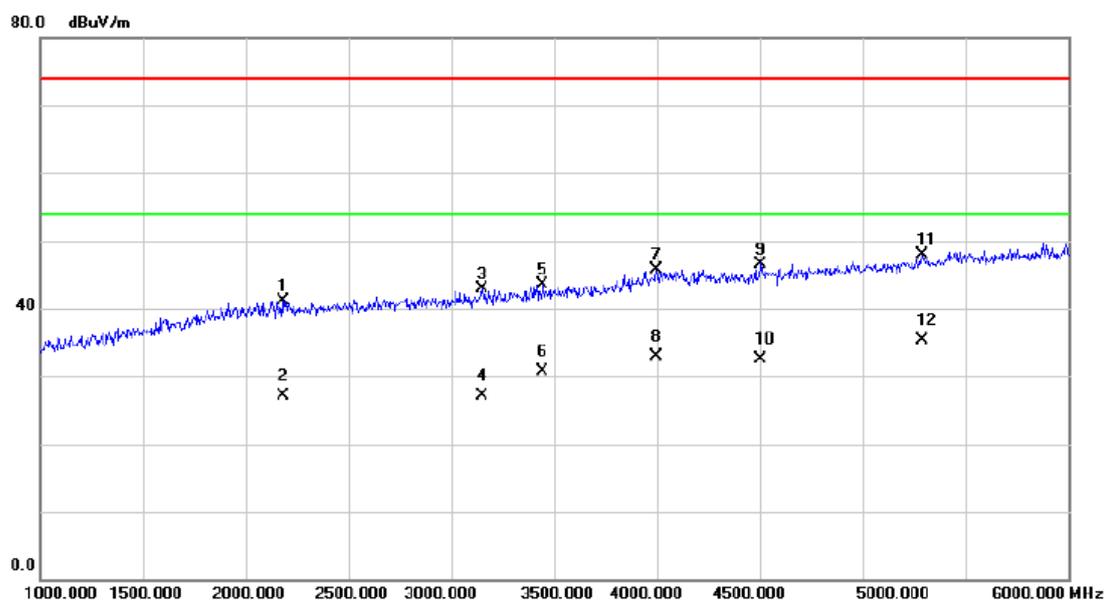

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2180.000	42.32	-1.17	41.15	74.00	-32.85	peak	
2		2180.000	28.31	-1.17	27.14	54.00	-26.86	AVG	
3		3150.000	40.74	2.19	42.93	74.00	-31.07	peak	
4		3150.000	24.82	2.19	27.01	54.00	-26.99	AVG	
5		3445.000	40.61	2.87	43.48	74.00	-30.52	peak	
6		3445.000	27.76	2.87	30.63	54.00	-23.37	AVG	
7		3995.000	39.06	6.59	45.65	74.00	-28.35	peak	
8		3995.000	26.34	6.59	32.93	54.00	-21.07	AVG	
9		4505.000	39.67	6.93	46.60	74.00	-27.40	peak	
10		4505.000	25.56	6.93	32.49	54.00	-21.51	AVG	
11		5290.000	39.45	8.51	47.96	74.00	-26.04	peak	
12	*	5290.000	26.77	8.51	35.28	54.00	-18.72	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Horizontal

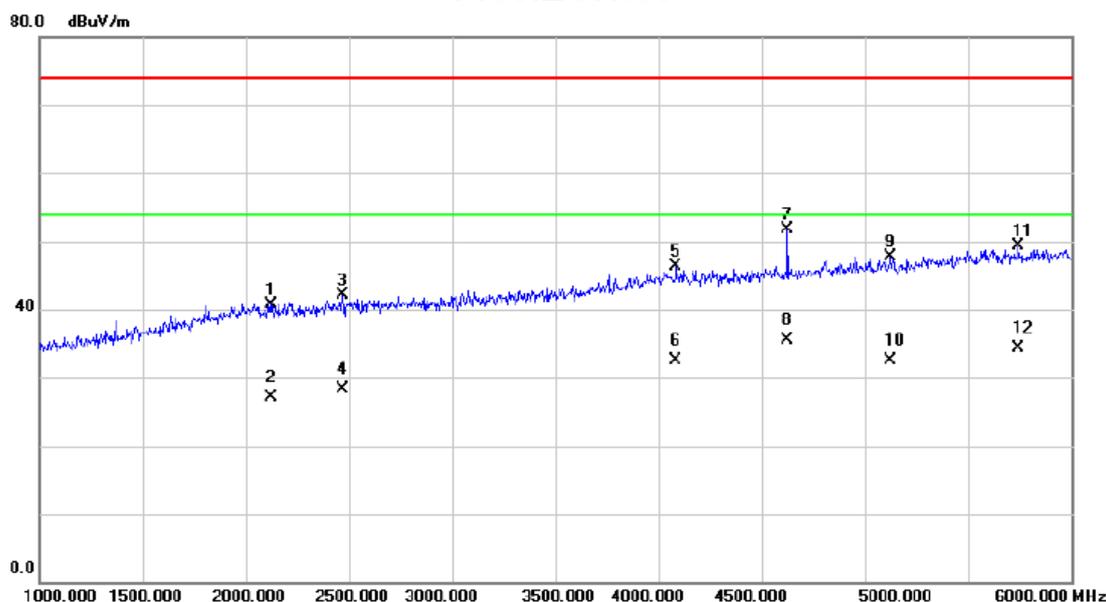

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2120.000	42.21	-1.41	40.80	74.00	-33.20	peak	
2		2120.000	28.49	-1.41	27.08	54.00	-26.92	AVG	
3		2470.000	42.18	-0.03	42.15	74.00	-31.85	peak	
4		2470.000	28.29	-0.03	28.26	54.00	-25.74	AVG	
5		4085.000	39.57	6.68	46.25	74.00	-27.75	peak	
6		4085.000	25.86	6.68	32.54	54.00	-21.46	AVG	
7		4625.000	44.54	7.11	51.65	74.00	-22.35	peak	
8	*	4625.000	28.37	7.11	35.48	54.00	-18.52	AVG	
9		5125.000	39.66	8.01	47.67	74.00	-26.33	peak	
10		5125.000	24.45	8.01	32.46	54.00	-21.54	AVG	
11		5745.000	39.80	9.44	49.24	74.00	-24.76	peak	
12		5745.000	24.86	9.44	34.30	54.00	-19.70	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Vertical

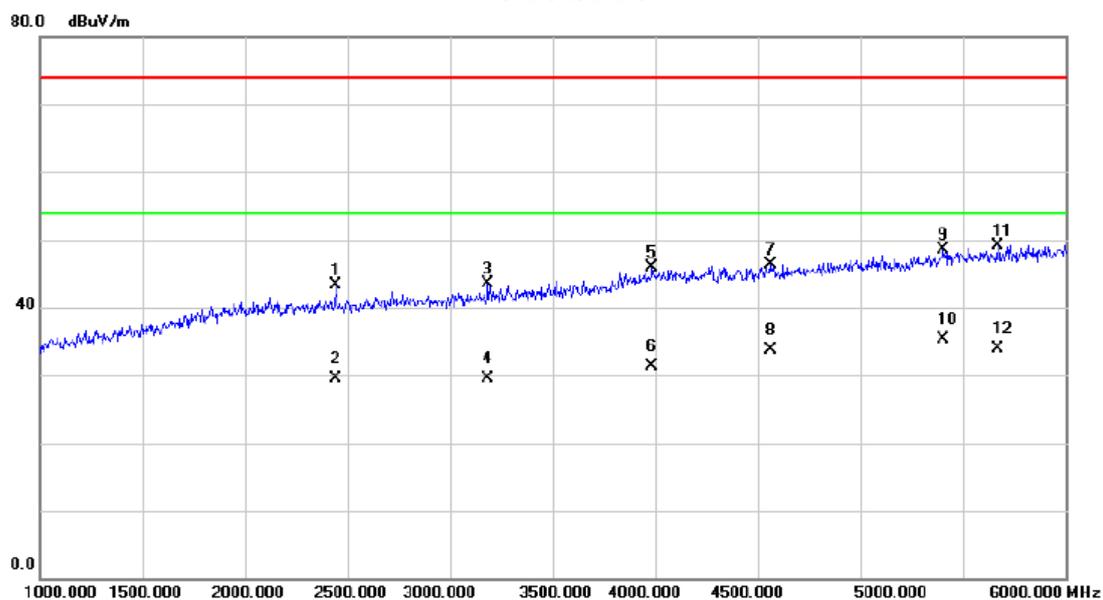

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2445.000	43.35	-0.14	43.21	74.00	-30.79	peak	
2		2445.000	29.67	-0.14	29.53	54.00	-24.47	AVG	
3		3185.000	41.18	2.27	43.45	74.00	-30.55	peak	
4		3185.000	27.30	2.27	29.57	54.00	-24.43	AVG	
5		3985.000	39.47	6.51	45.98	74.00	-28.02	peak	
6		3985.000	24.84	6.51	31.35	54.00	-22.65	AVG	
7		4560.000	39.21	7.01	46.22	74.00	-27.78	peak	
8		4560.000	26.76	7.01	33.77	54.00	-20.23	AVG	
9		5405.000	39.55	8.86	48.41	74.00	-25.59	peak	
10	*	5405.000	26.49	8.86	35.35	54.00	-18.65	AVG	
11		5670.000	39.81	9.35	49.16	74.00	-24.84	peak	
12		5670.000	24.47	9.35	33.82	54.00	-20.18	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: Phihong +USB Cable: PANG NGAI +Battery: Harbin Coslight H


Horizontal

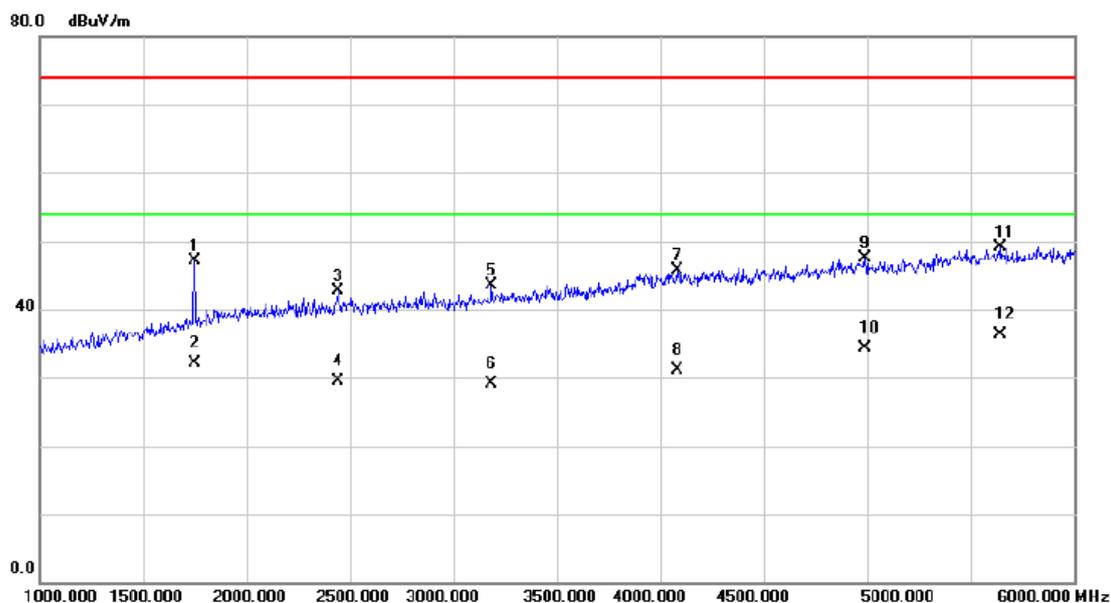

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1750.000	50.07	-2.97	47.10	74.00	-26.90	peak	
2		1750.000	35.12	-2.97	32.15	54.00	-21.85	AVG	
3		2445.000	42.82	-0.14	42.68	74.00	-31.32	peak	
4		2445.000	29.67	-0.14	29.53	54.00	-24.47	AVG	
5		3185.000	41.29	2.27	43.56	74.00	-30.44	peak	
6		3185.000	26.84	2.27	29.11	54.00	-24.89	AVG	
7		4080.000	39.05	6.68	45.73	74.00	-28.27	peak	
8		4080.000	24.46	6.68	31.14	54.00	-22.86	AVG	
9		4990.000	39.97	7.62	47.59	74.00	-26.41	peak	
10		4990.000	26.65	7.62	34.27	54.00	-19.73	AVG	
11		5645.000	39.84	9.32	49.16	74.00	-24.84	peak	
12	*	5645.000	27.08	9.32	36.40	54.00	-17.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle
Note:	USB Cable: PANG NGAI +Battery: Harbin Coslight H


Vertical

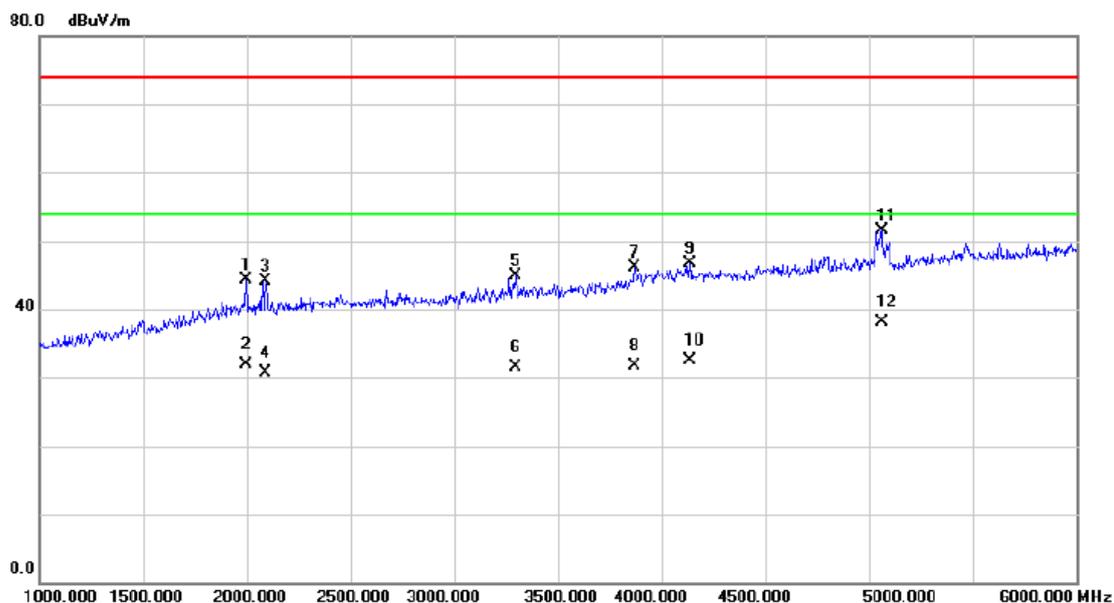

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1995.000	46.16	-1.90	44.26	74.00	-29.74	peak	
2		1995.000	33.79	-1.90	31.89	54.00	-22.11	AVG	
3		2090.000	45.57	-1.52	44.05	74.00	-29.95	peak	
4		2090.000	32.14	-1.52	30.62	54.00	-23.38	AVG	
5		3295.000	42.42	2.52	44.94	74.00	-29.06	peak	
6		3295.000	29.07	2.52	31.59	54.00	-22.41	AVG	
7		3870.000	40.43	5.67	46.10	74.00	-27.90	peak	
8		3870.000	26.08	5.67	31.75	54.00	-22.25	AVG	
9		4135.000	40.00	6.70	46.70	74.00	-27.30	peak	
10		4135.000	25.71	6.70	32.41	54.00	-21.59	AVG	
11		5060.000	43.62	7.82	51.44	74.00	-22.56	peak	
12	*	5060.000	30.26	7.82	38.08	54.00	-15.92	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle
Note:	USB Cable: PANG NGAI +Battery: Harbin Coslight H

Horizontal

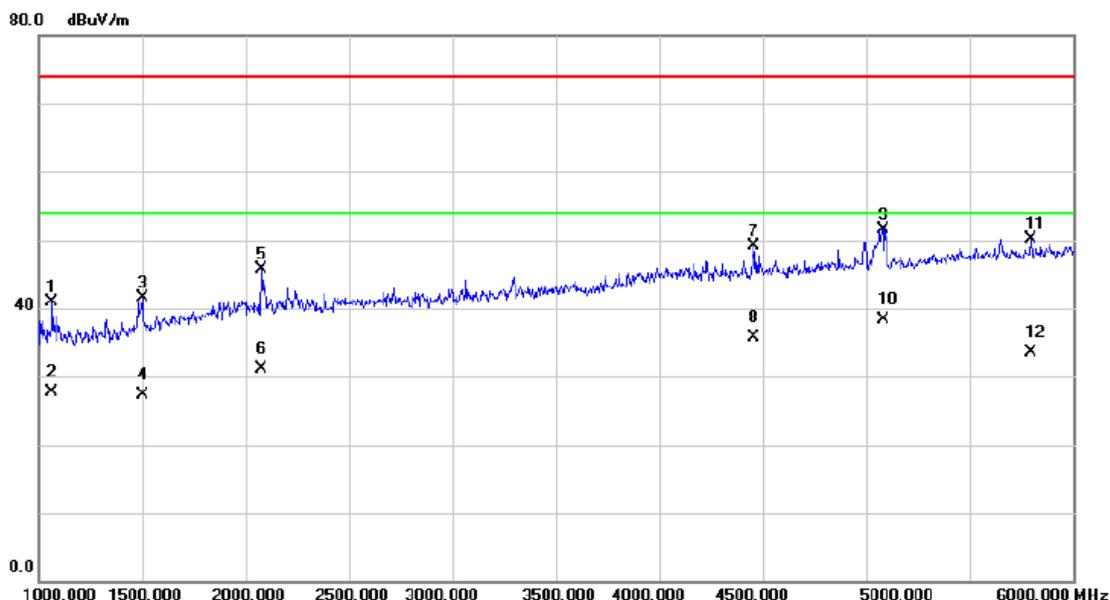

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1065.000	46.26	-5.35	40.91	74.00	-33.09	peak	
2		1065.000	33.03	-5.35	27.68	54.00	-26.32	AVG	
3		1500.000	45.61	-4.06	41.55	74.00	-32.45	peak	
4		1500.000	31.45	-4.06	27.39	54.00	-26.61	AVG	
5		2075.000	47.25	-1.59	45.66	74.00	-28.34	peak	
6		2075.000	32.63	-1.59	31.04	54.00	-22.96	AVG	
7		4455.000	42.30	6.89	49.19	74.00	-24.81	peak	
8		4455.000	28.91	6.89	35.80	54.00	-18.20	AVG	
9		5080.000	43.64	7.89	51.53	74.00	-22.47	peak	
10	*	5080.000	30.38	7.89	38.27	54.00	-15.73	AVG	
11		5795.000	40.68	9.50	50.18	74.00	-23.82	peak	
12		5795.000	23.91	9.50	33.41	54.00	-20.59	AVG	