



RF Test Report

Product Name: cdma2000 Digital Mobile Phone

Model Number: HUAWEI M660, M660

Report No: SYBH(Z-RF)004042012-2003

FCC ID: QISM660

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.

Contents

1	<u>General Information</u>	5
1.1	APPLIED STANDARD.....	5
1.2	TEST LOCATION.....	5
1.3	TEST ENVIRONMENT CONDITION	5
2	<u>Summary</u>	6
3	<u>Product Description</u>	7
3.1	PRODUCTION INFORMATION	7
5	<u>Test Description</u>	8
5.1	SUPPORTED FREQUENCY RANGE	8
5.2	TRANSMITTER / RECEIVER CHARACTERISTICS.....	8
5.3	ANTENNA GAIN.....	8
5.4	POWER SUPPLY	8
6	<u>General Test Conditions / Configurations</u>	9
6.1	RF CHANNELS UNDER TEST.....	9
6.2	TEST MODES.....	9
6.3	TEST ENVIRONMENTS	9
6.4	TEST SETUPS.....	10
6.5	TEST CONDITIONS	12
7	<u>Main Test Instruments</u>	14
8	<u>Test Results</u>	15
9	<u>Measurement Uncertainty</u>	16

1 General Information

1.1 Applied Standard	
Applied Rules:	47 CFR FCC Part 2, 2010.Subpart J 47 CFR FCC Part 24, 2010.Subpart E ANSI/TIA 603C:2004
1.2 Test Location	
Test Location 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Address:	Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China
1.3 Test Environment Condition	
Ambient Temperature:	20 – 25 °C
Ambient Relative Humidity:	45 – 55 %
Atmospheric Pressure:	101 kPa

2 Summary

Table 1 Summary of results

PCS Band			
Test Case	FCC Part No.	Requirements	Result
Transmitter Output Power	2.1046 & 24.232	Peak EIRP not exceed 2 W Peak-to-average ratio not exceed 13 dB	Pass
Modulation Characteristics	2.1047	Digital modulation	Pass
Occupied Bandwidth	2.1049	(Not specified)	Pass
Band Edges Compliance	2.1051 & 24.238	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 24.238	Below -13 dBm/1 kHz, 9 kHz to 150 kHz Below -13 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/1 MHz, 30 MHz to 10 th harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 24.238	Below -13 dBm/1 MHz	Pass
Frequency Stability	2.1055 & 24.235	Stay within the authorized frequency block	Pass

3 Product Description

3.1 Production Information

3.1.1 General Description

4 cdma2000 Digital Mobile Phone- HUAWEI M660, M660 is subscriber equipment in the CDMA/EVDO system. The frequency band is US Cellular and N. American PCS and AWS, Only CDMA PCS Band test data is included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, CDMA2000 1x and 1XEV-DO protocol processing, voice, MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service). It also provides Bluetooth module to synchronize data between a PC with Bluetooth function and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

4.1.1 Board

Table 1 Board Information

cdma2000 Digital Mobile Phone		
HUAWEI M660, M660		
Main board		
Software Version	Hardware Version	S/N
M660V100R001C153B811SP01	HC1M660M	Z5W01A9220200341

4.1.2 Adapter

AC/DCAdapter Model	HW-050100U1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

4.1.3 Battery Technical Data

Name	Manufacture	Description
Rechargeable Li-ion	Huawei Technologies Co., Ltd.	Battery Model: HB5N1H Rated capacity: 1500mAh Nominal Voltage:  +3.7V Charging Voltage:  +4.2V

5 Test Description

5.1 Supported Frequency Range

Characteristics	Description
Downlink	1930 to 1990 MHz
Uplink	1850 to 1910MHz

5.2 Transmitter / Receiver Characteristics

Characteristics	Description
System Type	CDMA
TX Output Power (per Antenna Port)	CDMA system: 24 dBm
Channel Spacing(s) / Bandwidth(s)	CDMA system: 1.23 MHz (Celluar band) 1.25 MHz (Other than Cellular band)
Designation of Emissions	CDMA system: 1M28F9W (Celluar band) 1M28F9W (Other than Cellular band)

5.3 Antenna Gain

Antenna Gain(dBi)	-0.43
-------------------	-------

5.4 Power Supply

	Description
Power Supply Type	Directly Connected to DC /AC Power Supply
Input to EUT (DC power)	DC Voltage Nominal: \equiv +3.7V DC Voltage Range: \equiv +3.6 V to +4.2V
Input to EUT (AC power)	AC Voltage Nominal: ~ 220V (50/60 Hz) AC Voltage Range: ~ 100V-240V

6 General Test Conditions / Configurations

6.1 RF Channels under Test

Test Mode	TX / RX	RF Channel		
		Bottom (B)	Middle (M)	Top (T)
TM1/TM3/ Subtype 0/ Subtype 2	TX	Channel 25	Channel 600	Channel 1175
		1851.25MHz	1880.0MHz	1908.75MHz
	RX	Channel 25	Channel 600	Channel 1175
		1931.25MHz	1960.0MHz	1988.75MHz

6.2 Test Modes

Test Mode	Test Modes Description
TM1/TM3	CDMA2000 1x
Subtype 0/ Subtype 2	CDMA2000 1x EV-DO

6.3 Test Environments

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.6V
	VN	3.7V
	VH	4.2V


NOTE: VL= lower extreme test voltages
 VN= nominal voltage
 VH= upper extreme test voltage
 TN= normal temperature

6.4 Test Setups


6.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Ports	Until otherwise declared, all TX tests are ONLY performed at the main Transmitter antenna port (e.g. TRXA, TXA and so on) of the EUT, and all RX tests are ONLY performed at the main Receiver antenna port (e.g. TRXA, RXA and so on) of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

6.4.2 Test Setup 1

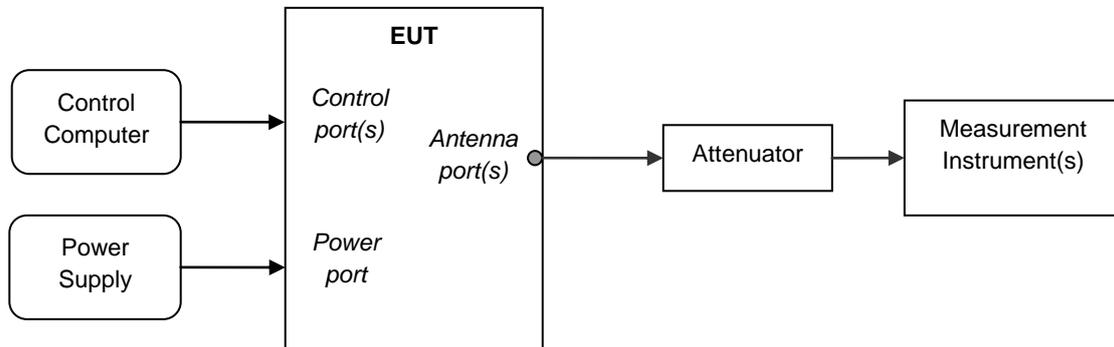


6.4.3 Test Setup 2

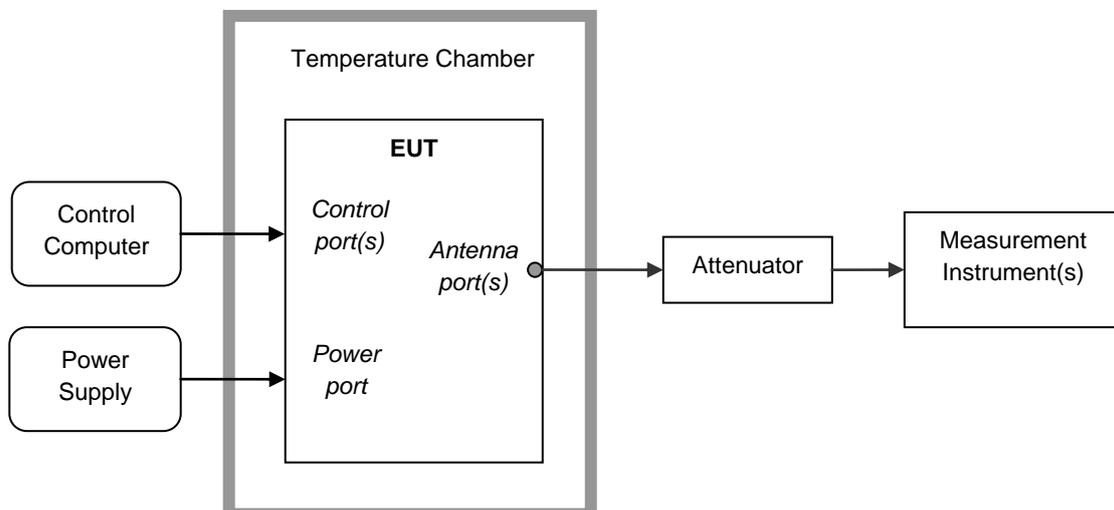


6.4.4 Test Setup 3

NOTE: Efficient Isotropic Radiated Power (EIRP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

Step 1: Pre-test

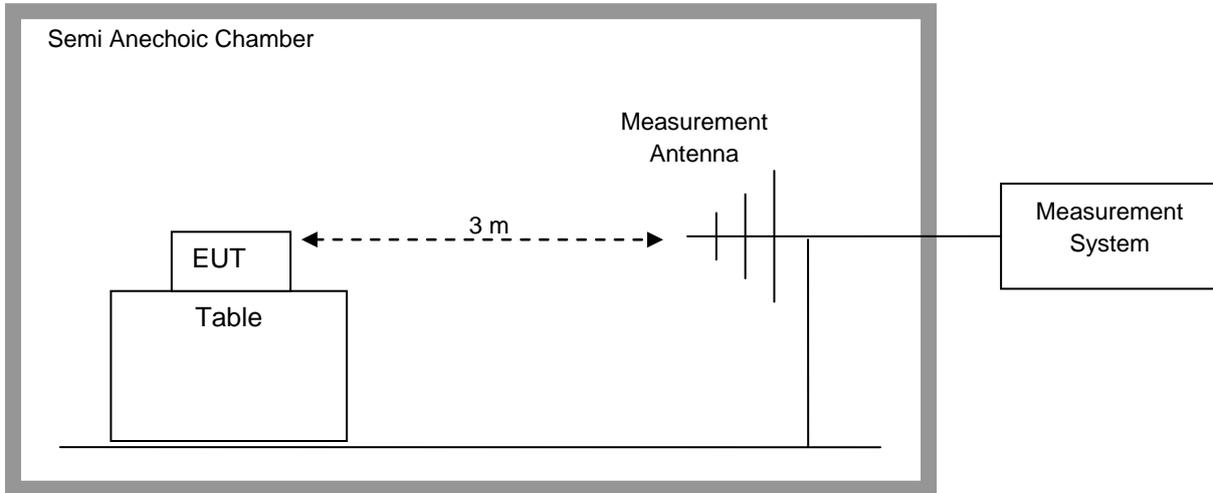

Step 2: Substitution method to verify the maximum EIRP

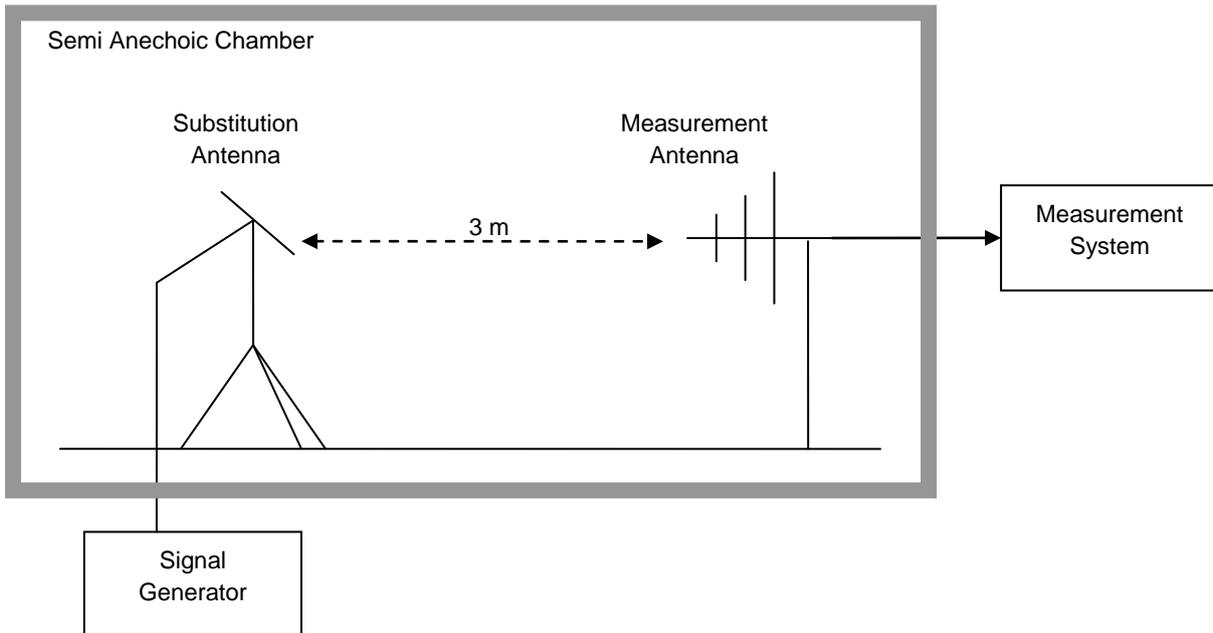

6.5 Test Conditions

Test Case	Test Conditions	
Transmitter Output Power	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1& Test Setup 3
	Detector	RMS
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM3/ Subtype 0/ Subtype 2
Modulation Characteristics	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	RF Channels (TX)	M
	Test Mode	TM1/TM3/ Subtype 0/ Subtype 2
Occupied Bandwidth	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM3/ Subtype 0/ Subtype 2
Band Edges Compliance	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	B, T
	Test Mode	TM1/TM3/ Subtype 0/ Subtype 2
Spurious Emission at Antenna Terminals	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M,T
	Test Mode	TM1/TM3/ Subtype 0/ Subtype 2
Field Strength of Spurious Radiation	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	PK
	RF Channels (TX)	M
	Test Mode	TM1/TM3/ Subtype 0/ Subtype 2
Frequency Stability	Test Configuration	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) 85%, 100% and 115% of Rated Voltage at Ambient Temperature.



Test Case	Test Conditions	
	Test Setup	Test Setup 2
	RF Channels (TX)	M
	Test Mode	TM1/TM3/ Subtype 0/ Subtype 2

7 Main Test Instruments

Table 2 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sep.27,2012
Universal Radio Communication Tester	R&S	CMU200	117341	Jan.12.2013
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug.31,2012
Spectrum Analyzer	Agilent	E4440A	MY49420179	Apr.20,2012
Signal Analyzer	R&S	FSQ31	200021	Sep.27,2012
Temperature Chamber	WEISS	WKL64	24600294	Feb.13,2013
Signal generator	Agilent	E8257D	MY49281095	Jul.09.2012
Test receiver	R&S	ESU26	100150	May.29.2012
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	919/1009	Jan.29.2013
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	Jan.29.2013
Horn Antenna	R & S	HF906	100683	May.15, 2012
Horn Antenna	R & S	HF906	100684	Jul.01, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-357	May.15, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-356	May.15, 2012
Universal Radio Communication Tester	R & S	CMW500	20347676	Sep.07,2012
Universal Radio Communication Tester	Anritsu	MT8820C	6200971028	May.04, 2012

8 Test Results

No.	Test Item	Test Result
1	Transmitter Output Power	Appendix A
2	Modulation Characteristics	Appendix B
3	Occupied Bandwidth	Appendix C
4	Band Edges Compliance	Appendix D
5	Spurious Emission at Antenna Terminals	Appendix E
6	Field Strength of Spurious Radiation	Appendix F
7	Frequency Stability	Appendix G
8	Photos of Radiated Spurious Emissions	Appendix H

NOTE: The Appendix H only photos of Radiated Spurious Emissions, no test data.



9 Measurement Uncertainty

For a 95% confidence level (k=2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmitter Output Power	Power (dBm)	U =0.39 dB
Occupied Bandwidth	Magnitude (%)	U=0.2%
Band Edge Compliance	Disturbance Power (dBm)	U=2.0 dB
Conducted Spurious Emissions	Disturbance Power (dBm)	U=2.0 dB
Field Strength of Spurious Radiation	ERP (dBm)	U=4.6 dB (30 MHz – 1GHz) U=3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy (ppm)	U=0.21 ppm

-----The END-----



Appendix A

Transmitter Output Power

According to FCC Part 2.1046 & Part24.232



Conducted Power of Transmitter

Table 1 Measurement Results

TEST CONDITIONS (TN/VN)	RF Output Power(Conducted)					
	Channel 25(B) 1851.25MHz		Channel 600(M) 1880.0MHz		Channel 1175(T) 1908.75MHz	
	dBm		dBm		dBm	
	Measured	Limit	Measured	Limit	Measured	Limit
TM1	24.33	33.0	24.38	33.0	24.29	33.0
TM3	24.49	33.0	24.37	33.0	24.29	33.0
Subtype 0	23.92	33.0	23.78	33.0	23.75	33.0
Subtype 2	24.08	33.0	23.97	33.0	23.84	33.0



Effective Isotropic Radiated Power of Transmitter (EIRP)

Table 2 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBi]	Cable Loss [dB]	Substitution Level (EIRP) [dBm]	FCC limit [dBm]	Result
TM1	1851.25	23.90	Horn Ant.	20.42	4.5	1	23.92	33	Pass
TM1	1880.0	23.95	Horn Ant.	20.44	4.5	1	23.94	33	Pass
TM1	1908.75	23.86	Horn Ant.	20.05	4.8	1	23.85	33	Pass
TM3	1851.25	24.06	Horn Ant.	20.51	4.5	1	24.01	33	Pass
TM3	1880.0	23.94	Horn Ant.	20.44	4.5	1	23.94	33	Pass
TM3	1908.75	23.86	Horn Ant.	20.03	4.8	1	23.83	33	Pass
Subtype 0	1851.25	23.65	Horn Ant.	20.14	4.5	1	23.64	33	Pass
Subtype 0	1880.0	23.54	Horn Ant.	20.05	4.5	1	23.55	33	Pass
Subtype 0	1908.75	23.41	Horn Ant.	19.65	4.8	1	23.45	33	Pass
Subtype 2	1851.25	23.90	Horn Ant.	20.42	4.5	1	23.92	33	Pass
Subtype 2	1880.0	23.95	Horn Ant.	20.41	4.5	1	23.91	33	Pass
Subtype 2	1908.75	23.86	Horn Ant.	20.05	4.8	1	23.85	33	Pass

Note: a, For getting the EIRP (Efficient Isotropic Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{EIRP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBi]}$$

b, SGP=Signal Generator Level

-----The END-----




Appendix B

Modulation Characteristics

According to FCC Part 2.1047& Part 24 Subpart E




Channel 600(TM1)

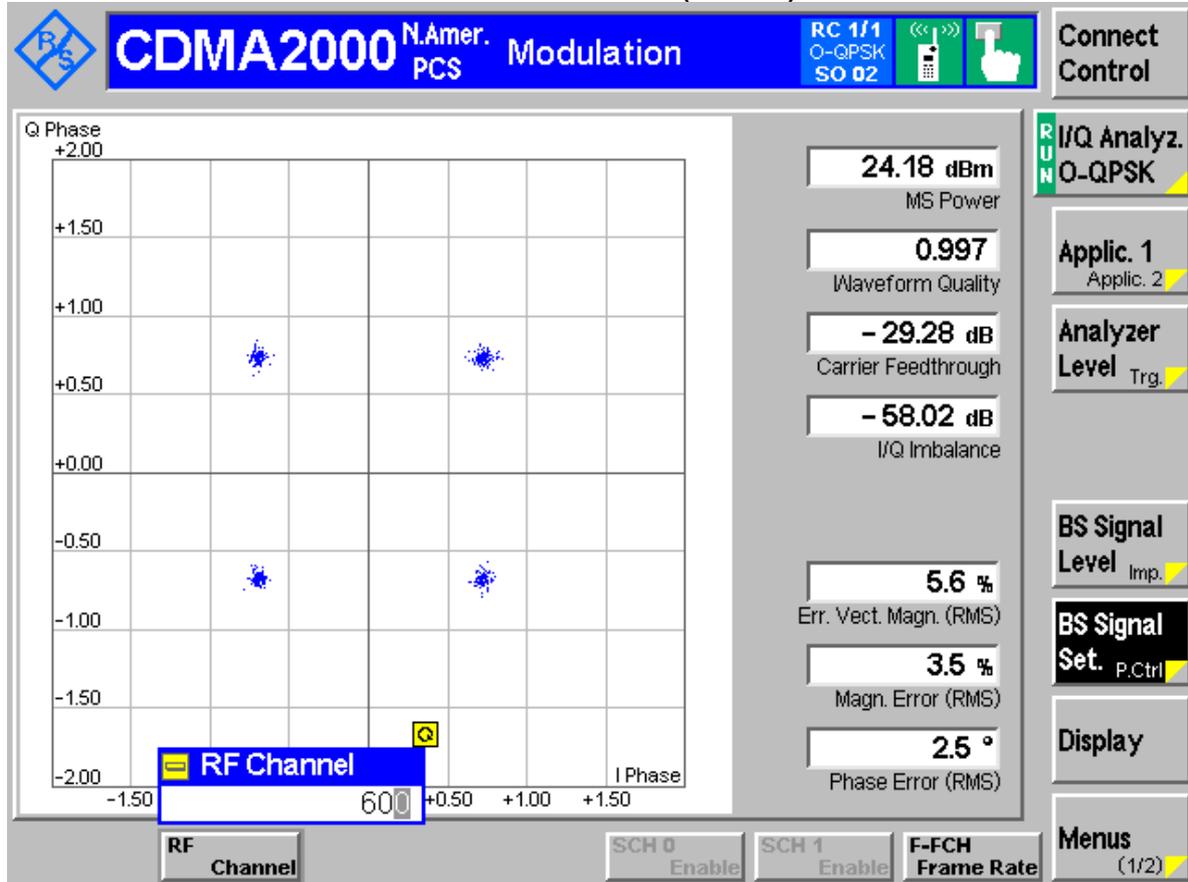




Channel 600(TM3)

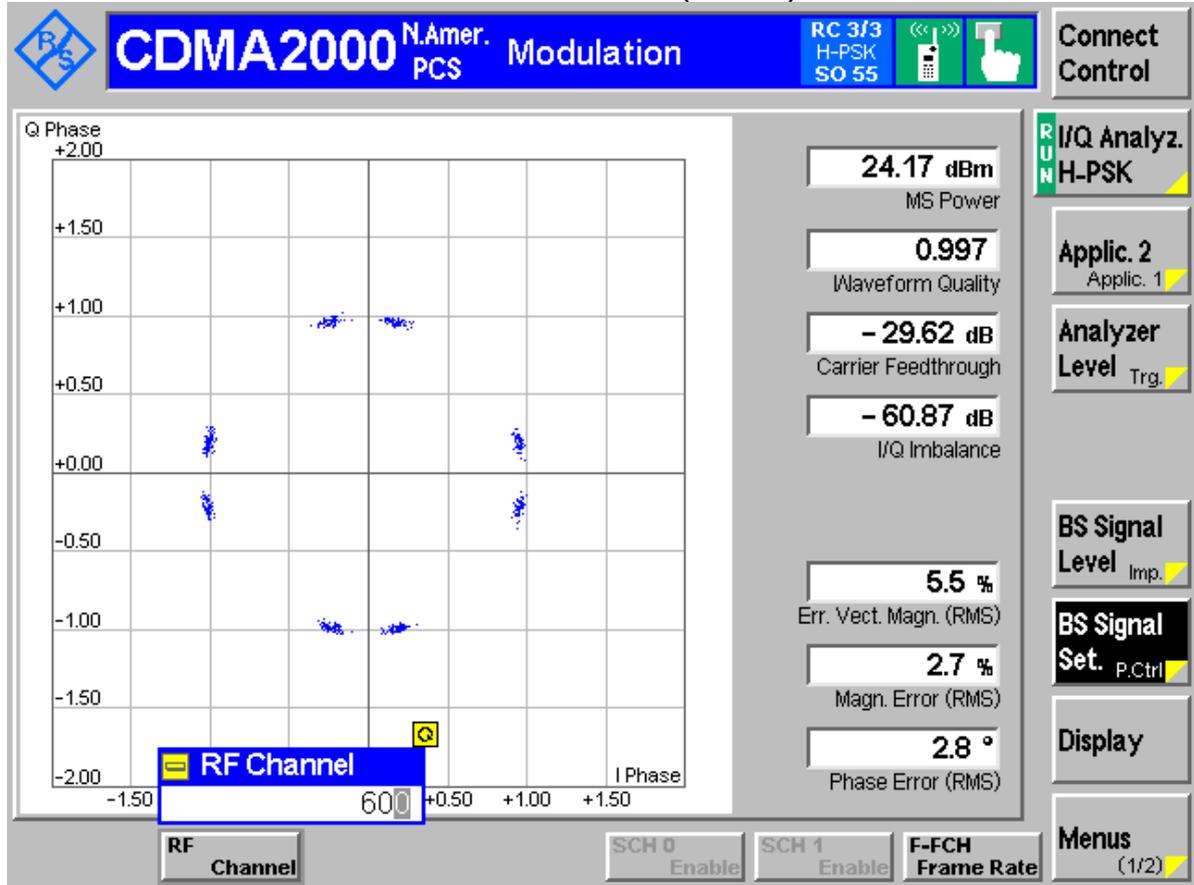




Channel600(Subtype 0) (HPSK)

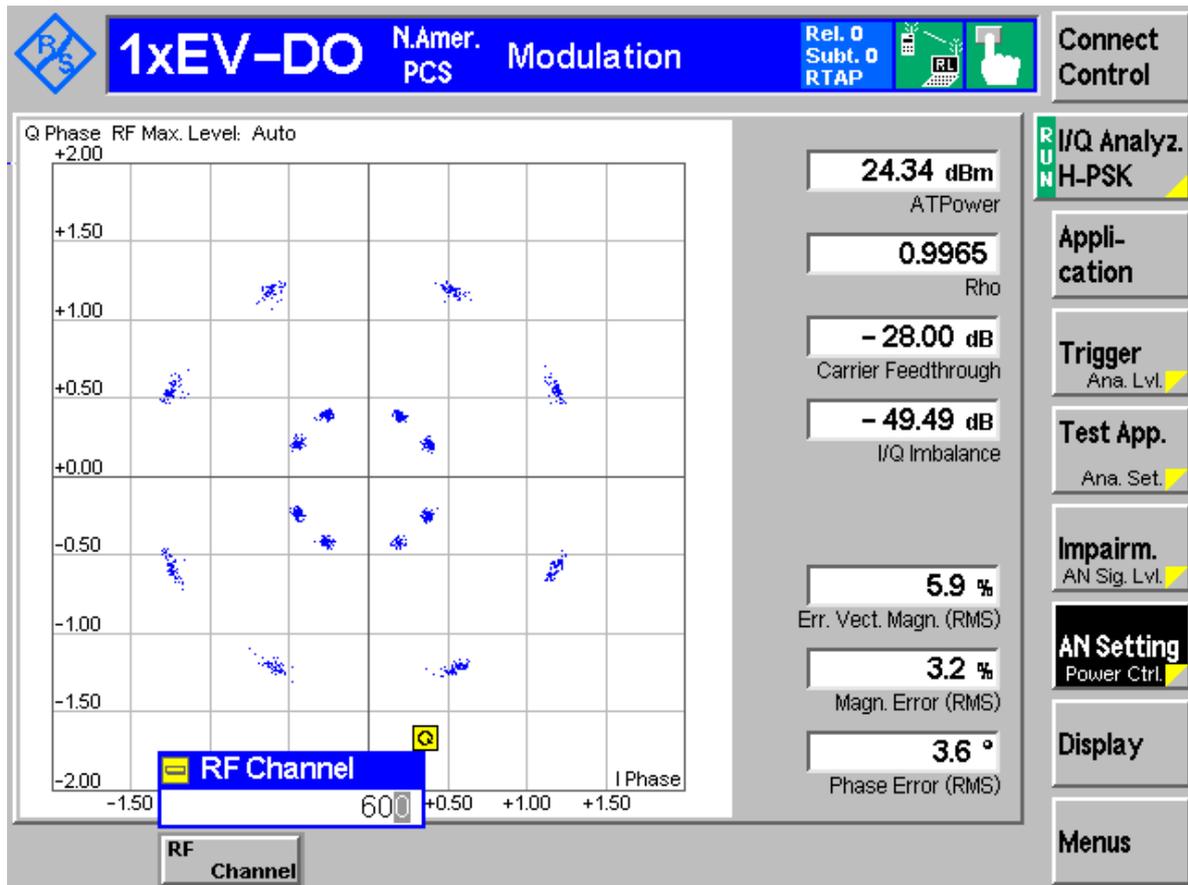




R-Data Pkt Size (4096 bits)
(QPSK)

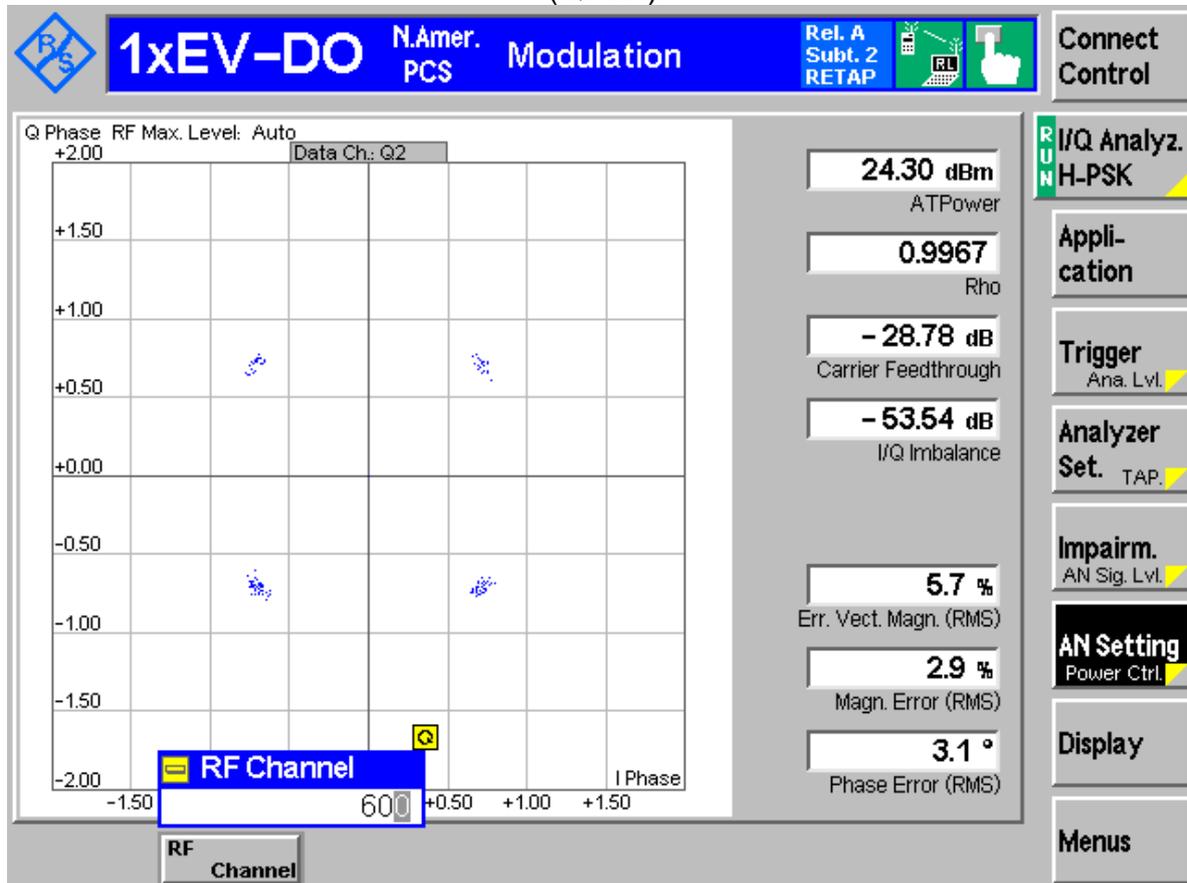



R-Data Pkt Size (12288 bits)
(8PSK)

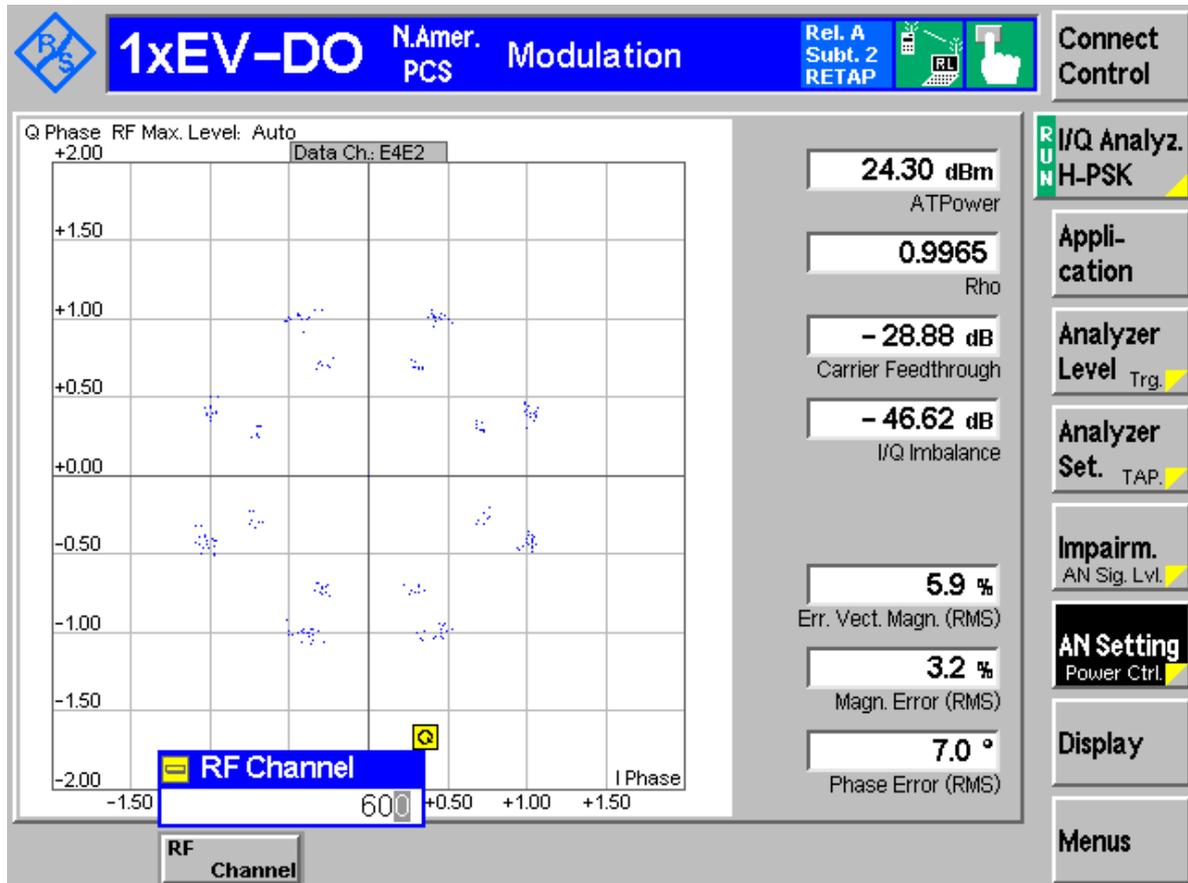

-----The END-----



Appendix C

Occupied Bandwidth

According to FCC part 2.1049 & Part 24 Subpart E




Result Table

Test Mode	RF Channel	Occupied Bandwidth [MHz]	Verdict
TM1	B	1.28	Pass
	M	1.28	Pass
	T	1.28	Pass
TM3	B	1.28	Pass
	M	1.28	Pass
	T	1.28	Pass
Subtype 0	B	1.28	Pass
	M	1.28	Pass
	T	1.28	Pass
Subtype 2	B	1.28	Pass
	M	1.28	Pass
	T	1.28	Pass



Channel 25 (TM1)

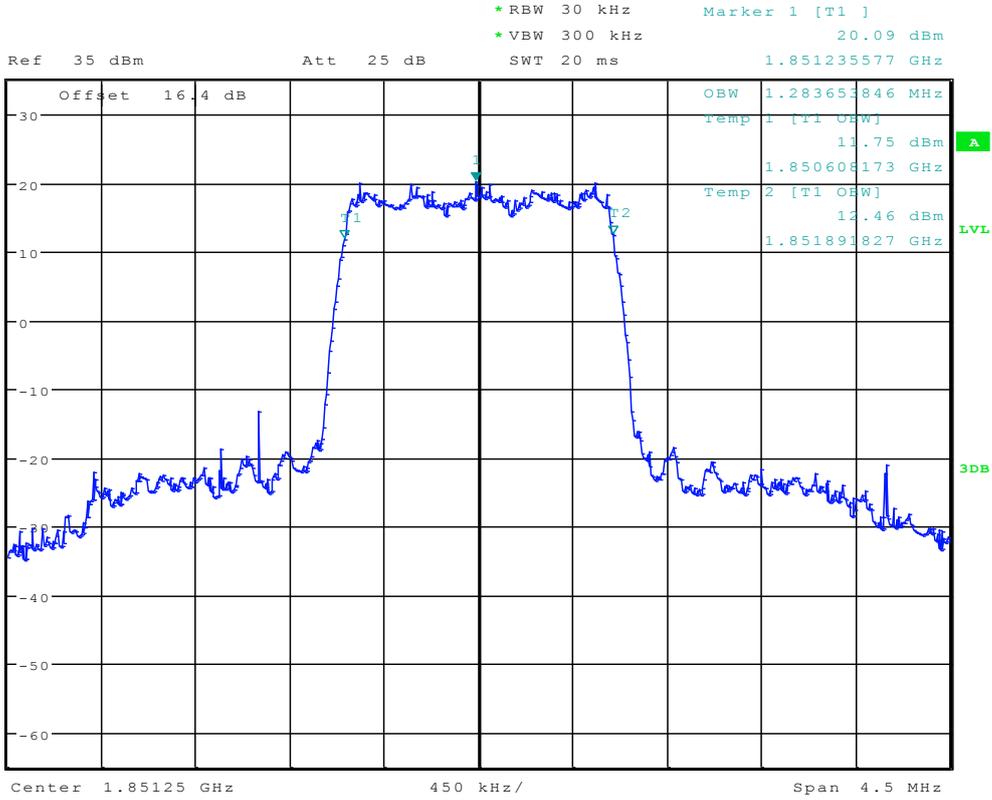




Channel 25 (TM3)




Ref 35 dBm Att 25 dB SWT 20 ms
 *RBW 30 kHz *VBW 300 kHz
 Marker 1 [T1] 19.97 dBm
 1.851581731 GHz

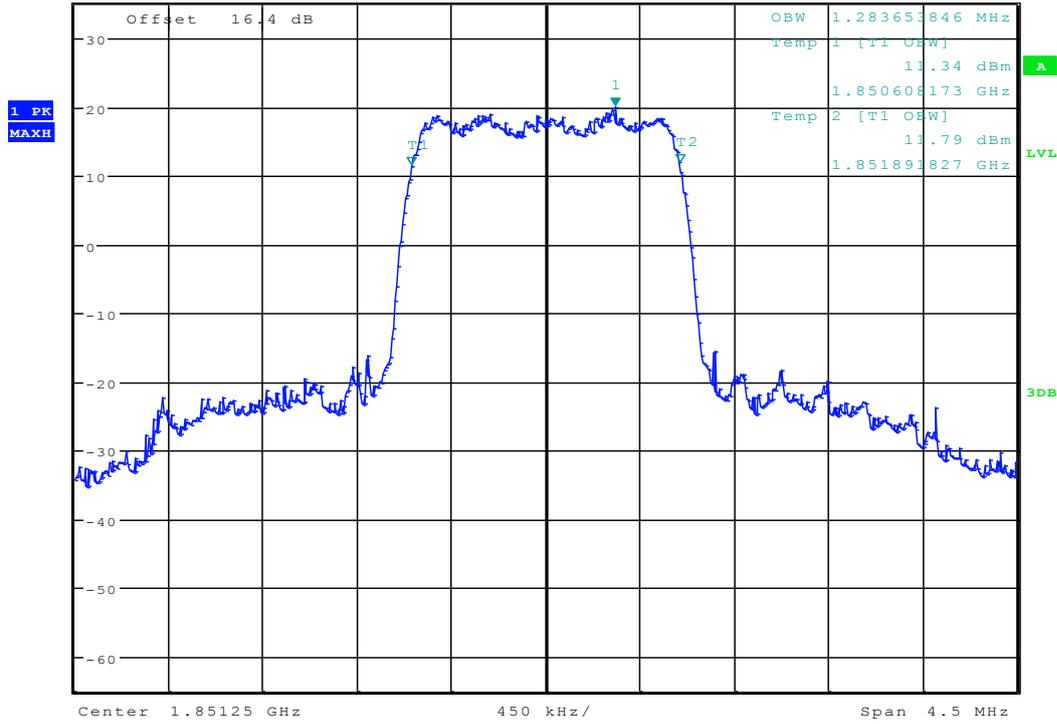




Channel 25 (EVDO subtype 0)

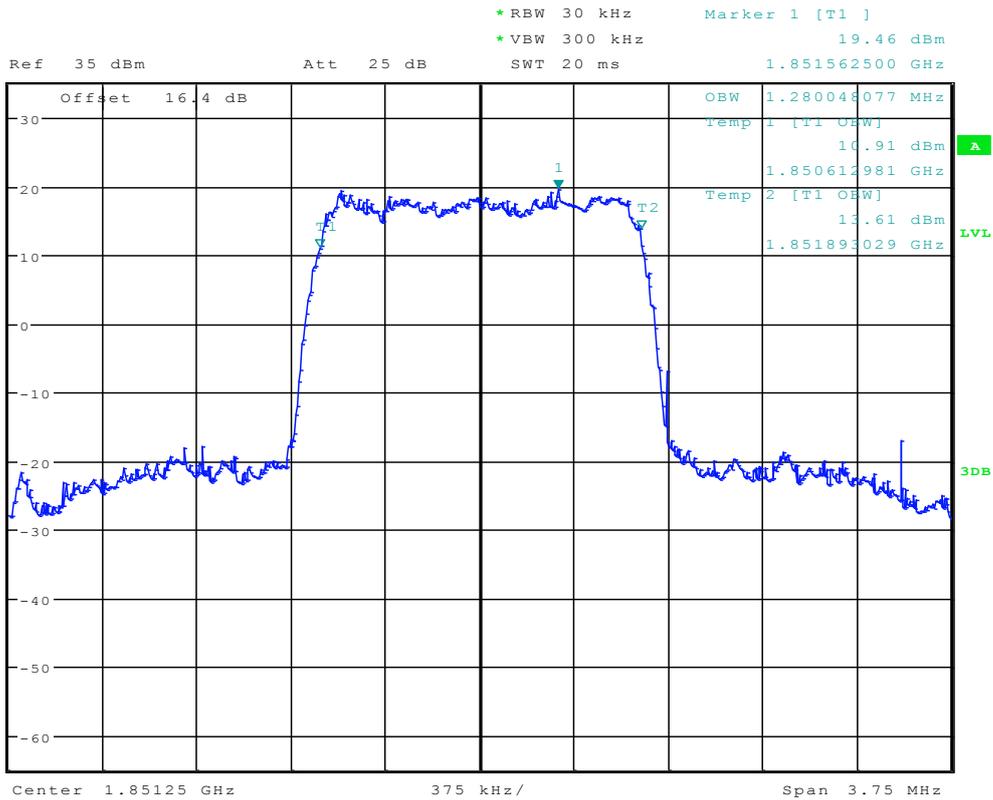




Channel 25 (EVDO Subtype 2)

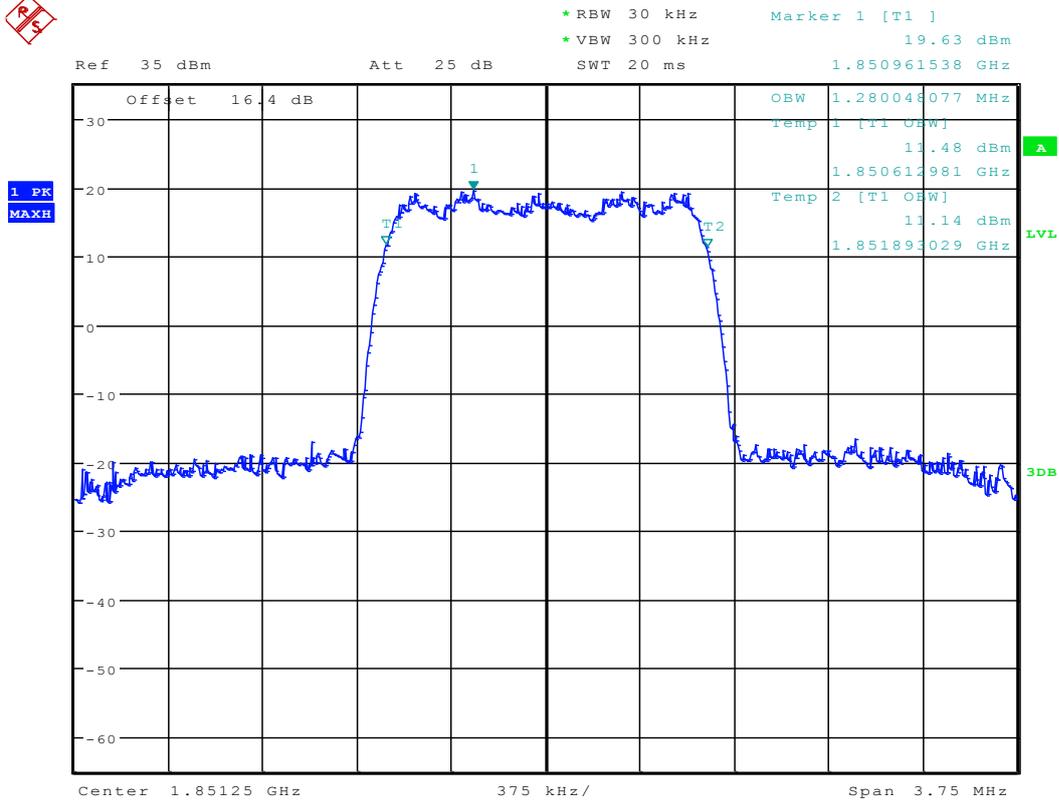




Channel 600(TM1)

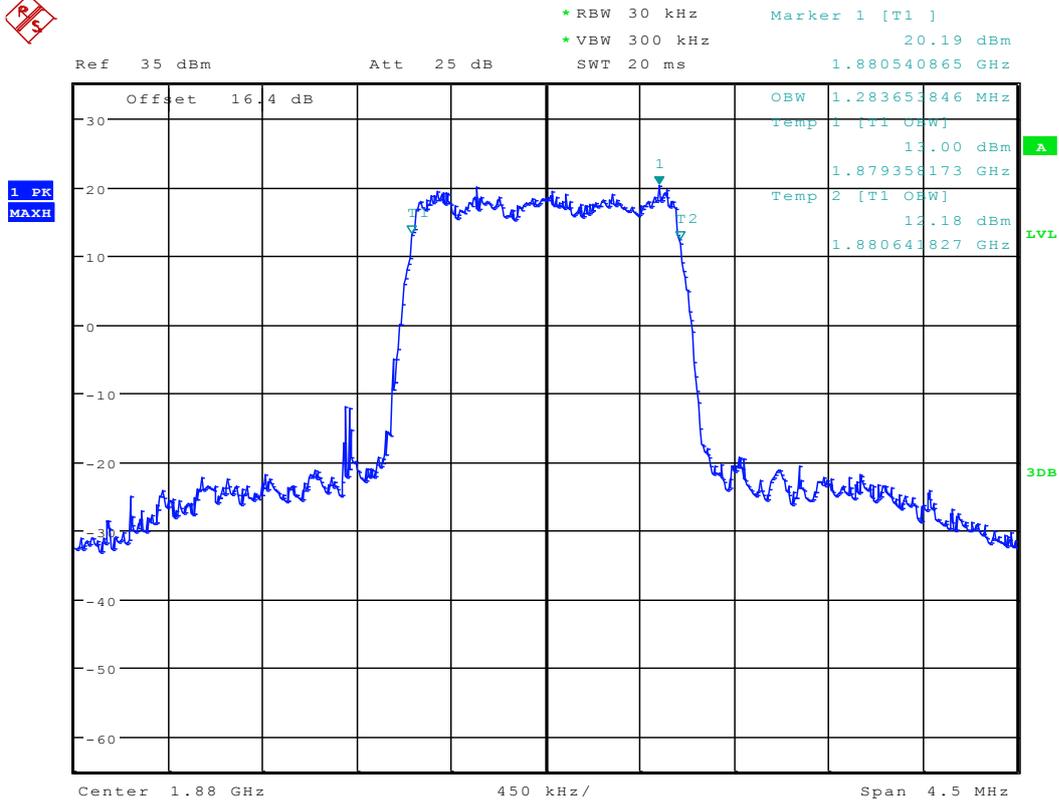




Channel 600(TM3)

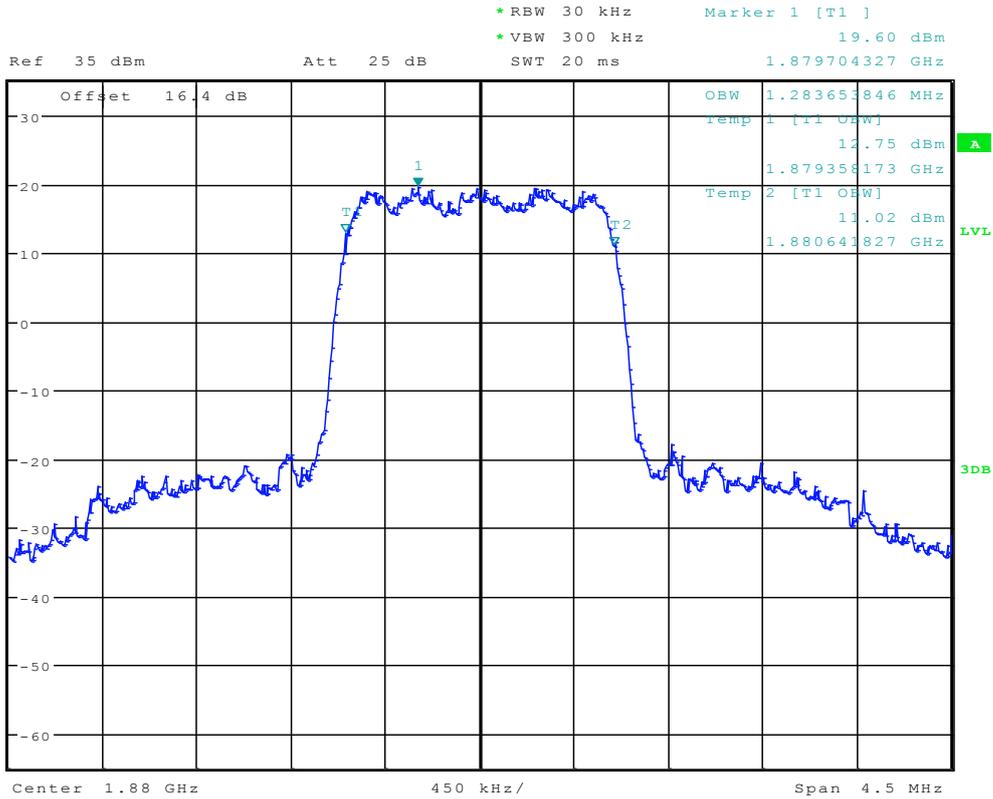




Channel 600 (EVDO subtype 0)

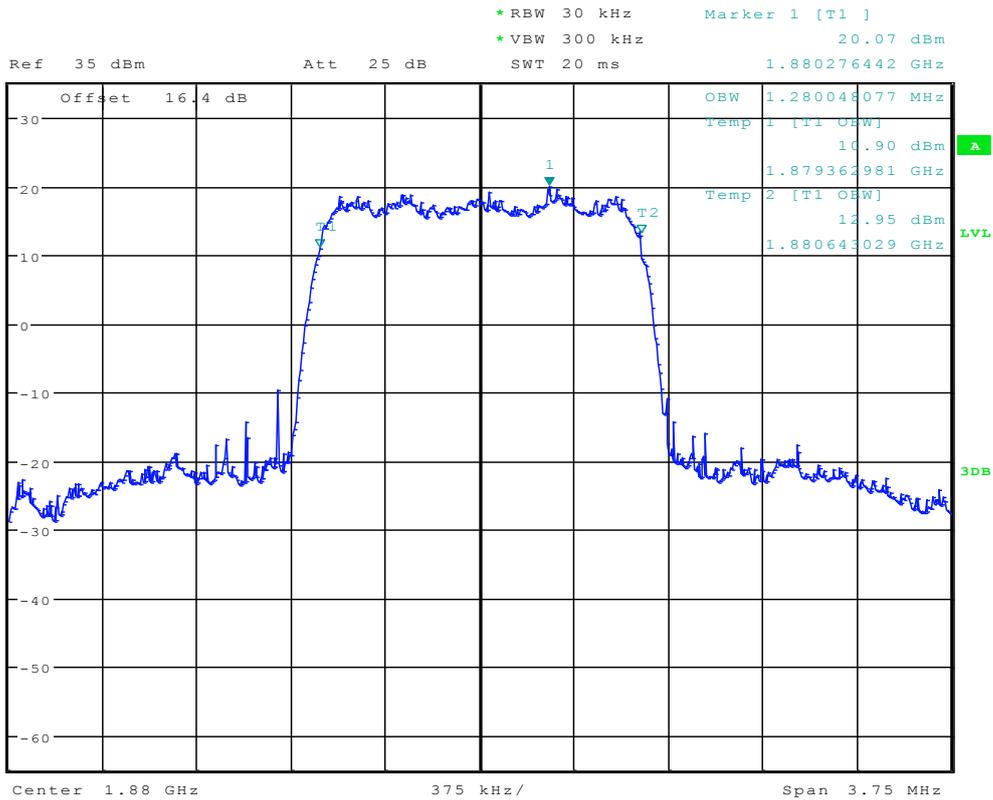




Channel 600 (EVDO subtype 2)

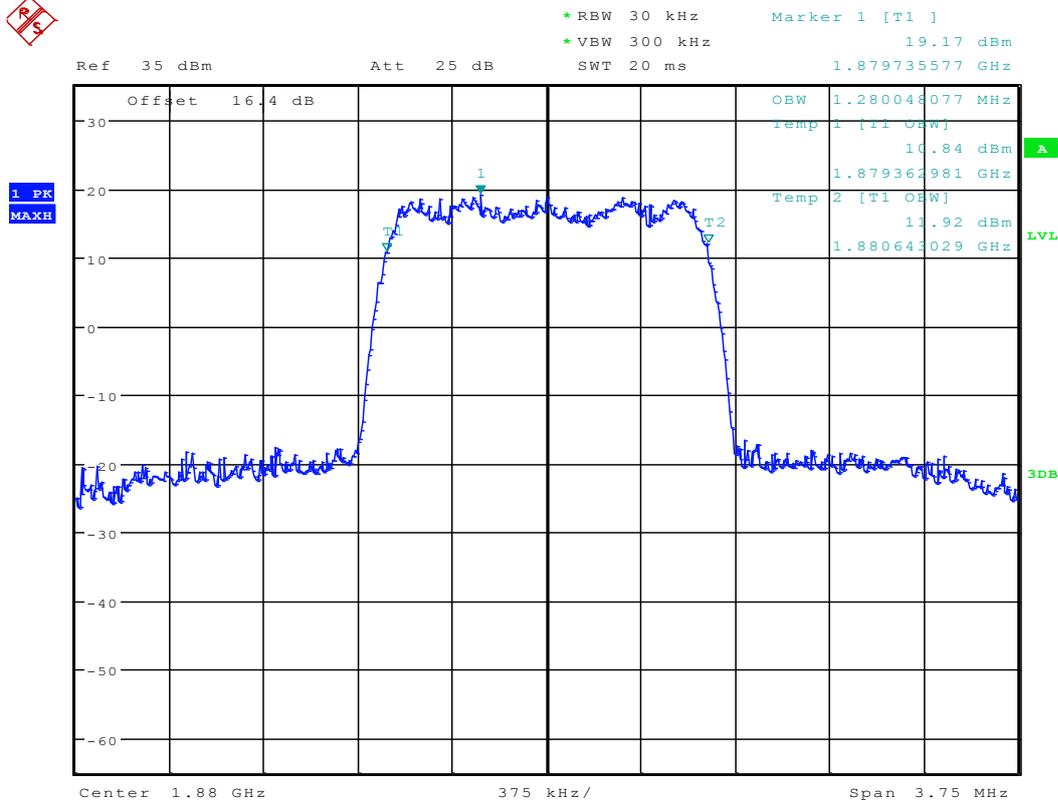

DATE: 2012-03-10 17:40




Channel 1175(TM1)

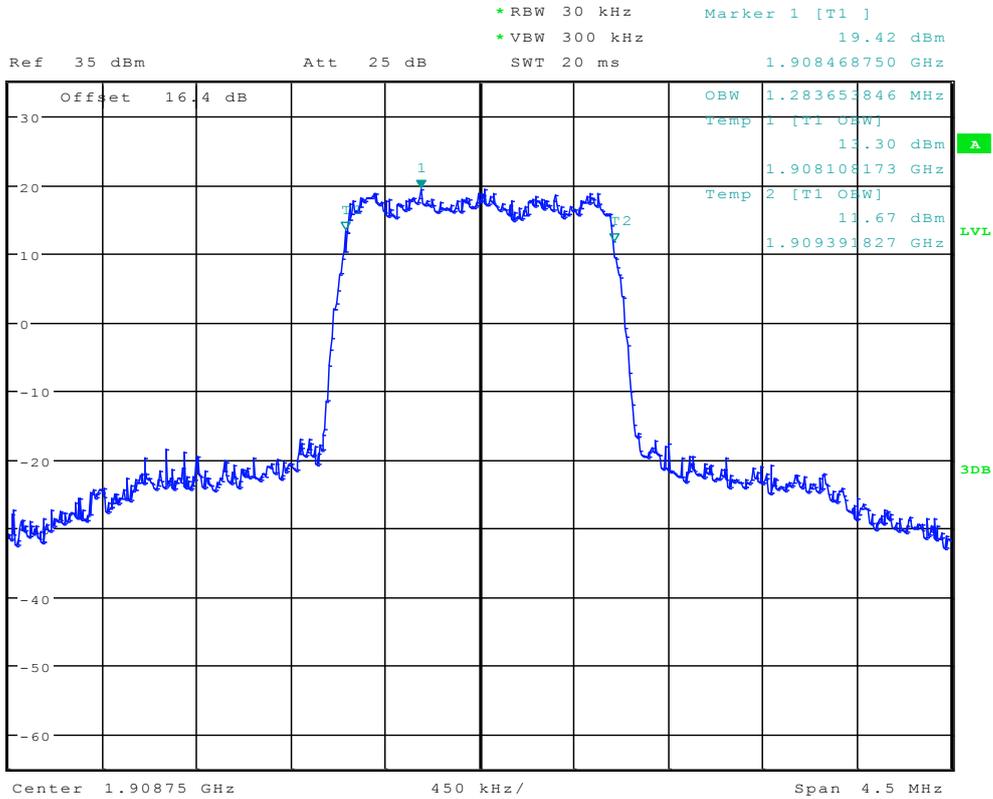




Channel 1175(TM3)

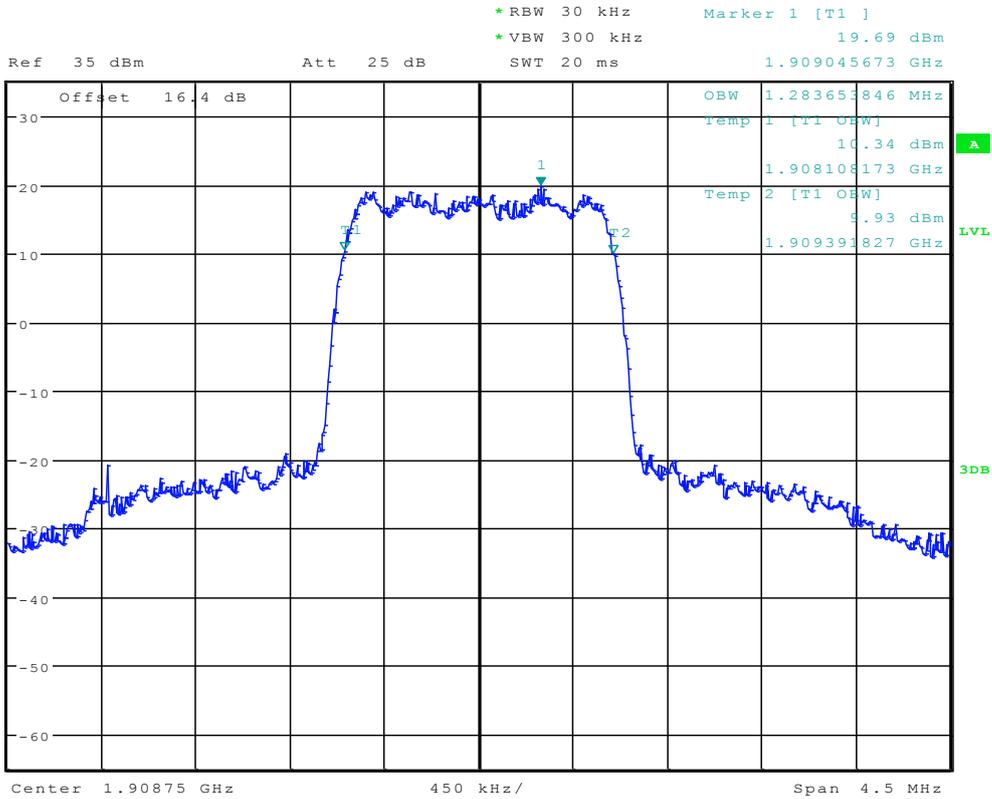




Channel 1175 (EVDO subtype 0)

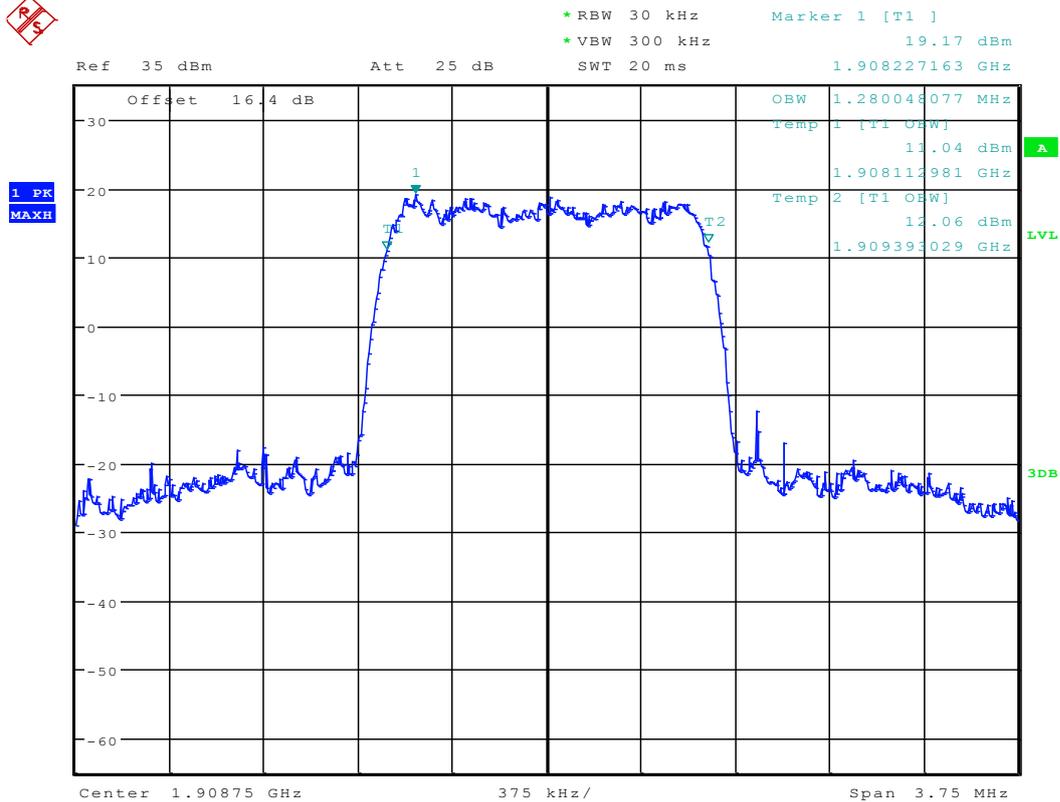



Channel 1175 (EVDO subtype 2)

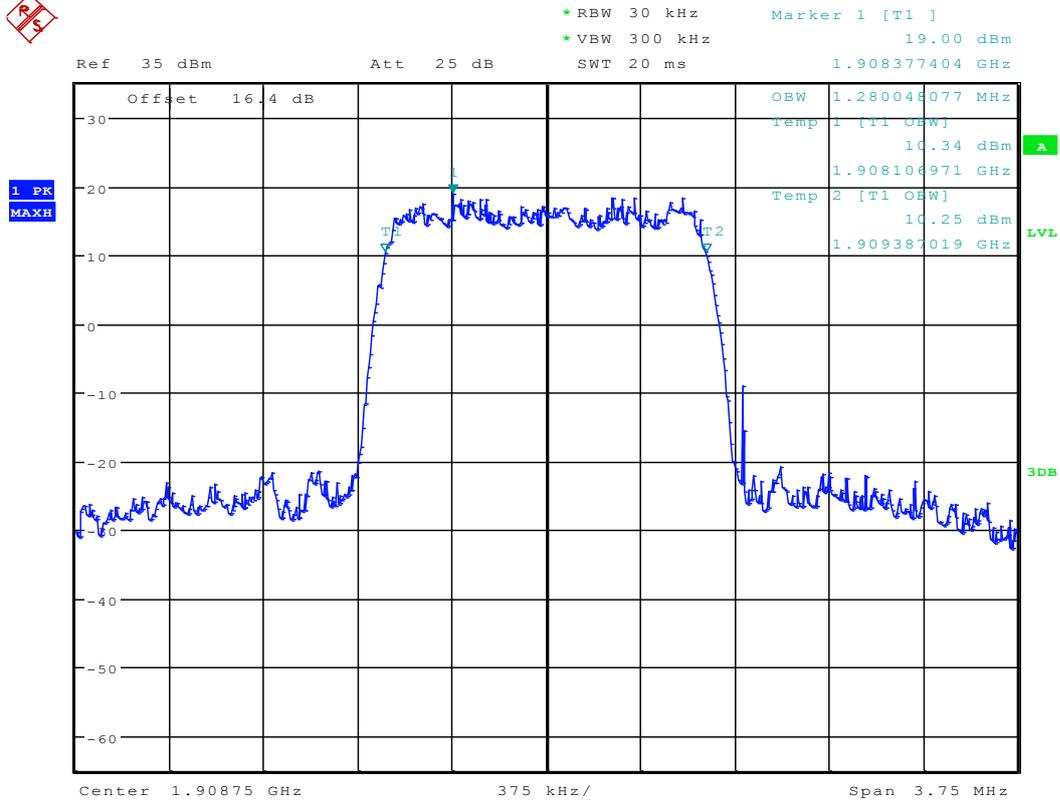

The END



Appendix D


Band Edges Compliance

According to FCC Part 2.1051 & 24.238




TM1

Left Edge (1850 MHz) Channel 25

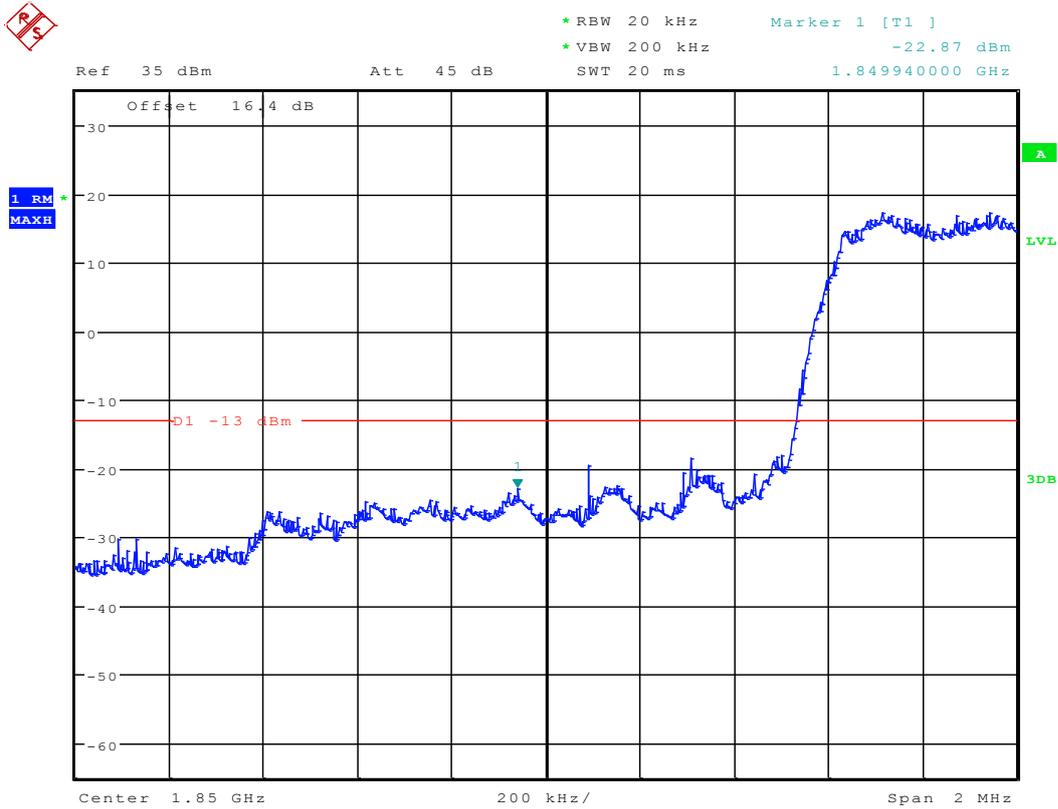




Right Edge (1910MHz) Channel 1175

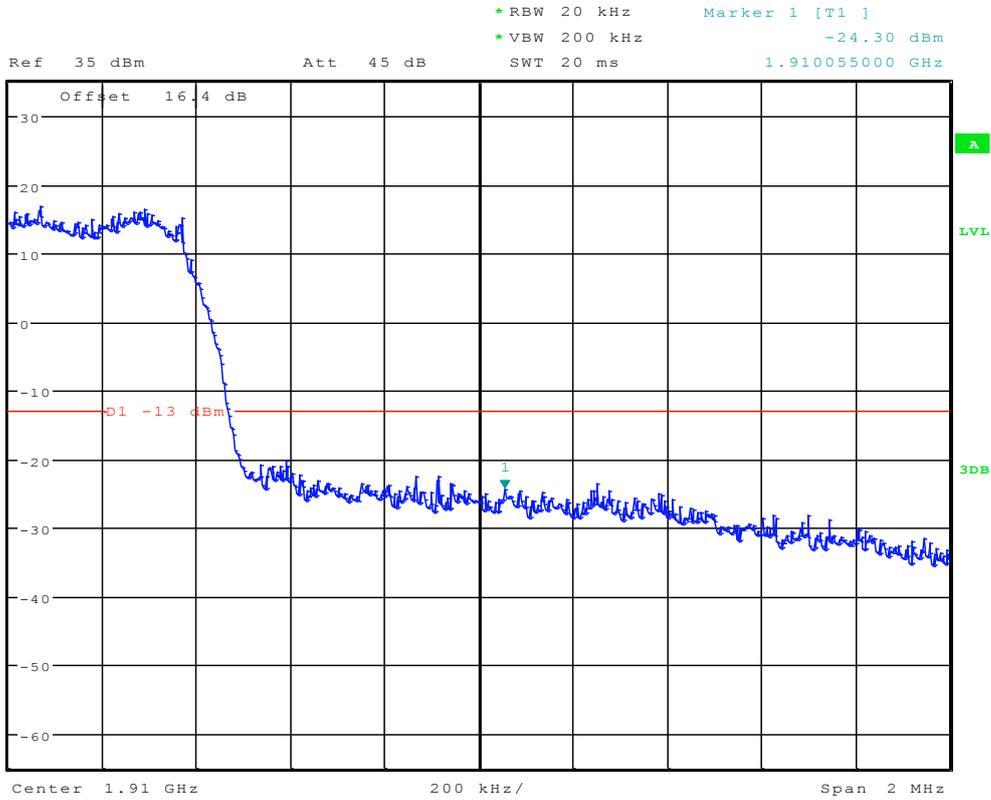




TM3 Left Edge (1850 MHz) Channel 25

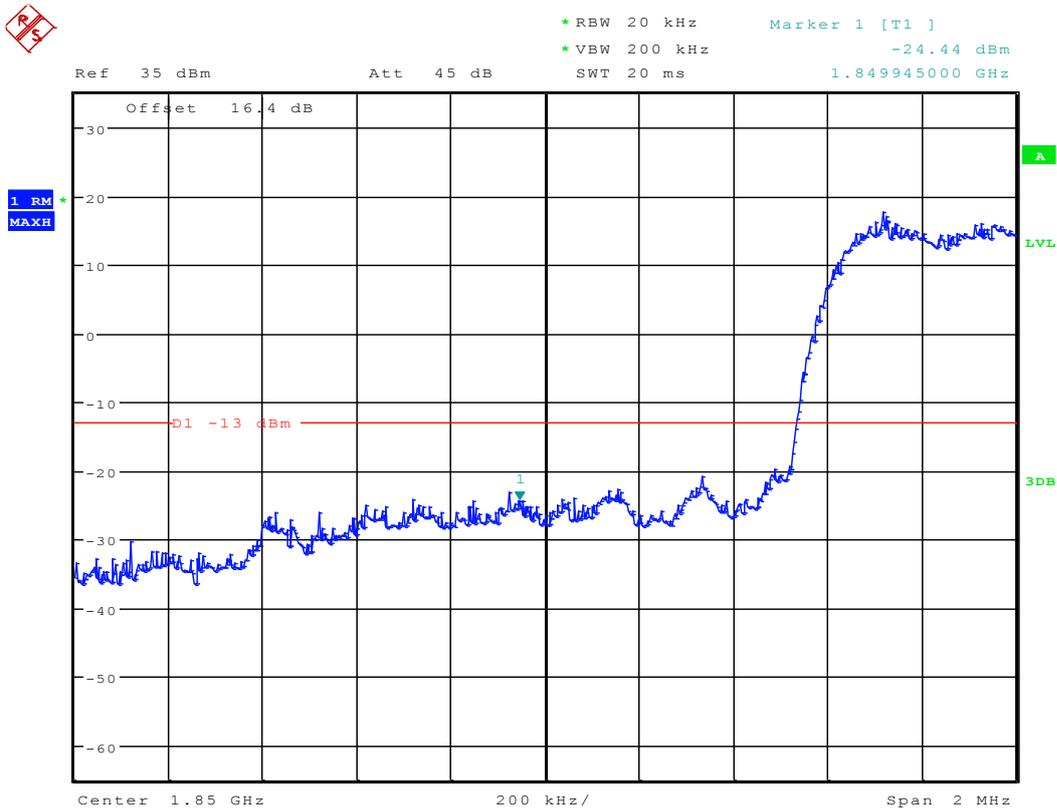




Right Edge (1910MHz) Channel 1175

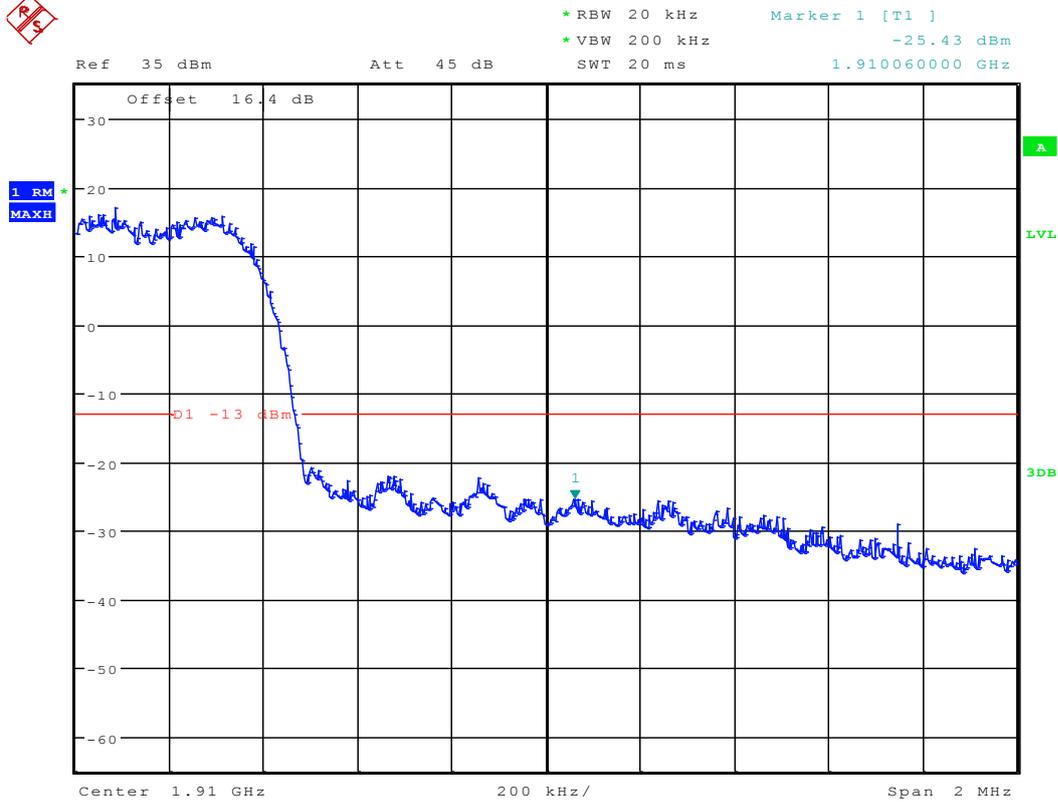




EVDO subtype 0

Left Edge (1850 MHz) Channel 25

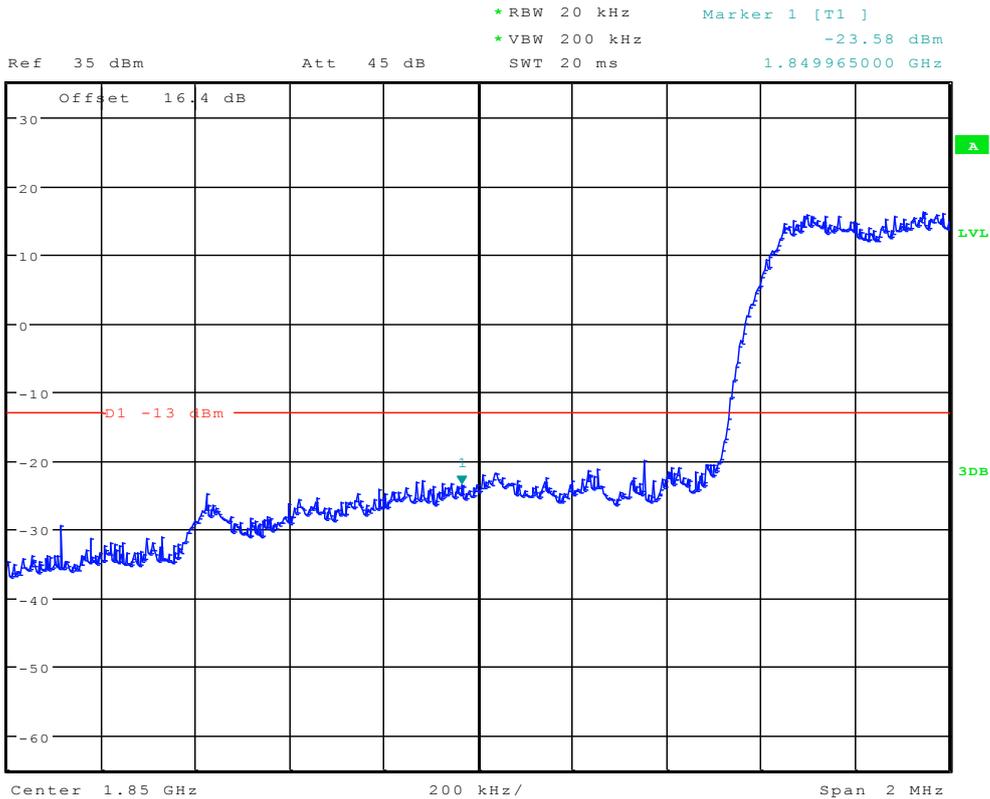



Right Edge (1910MHz) Channel 1175

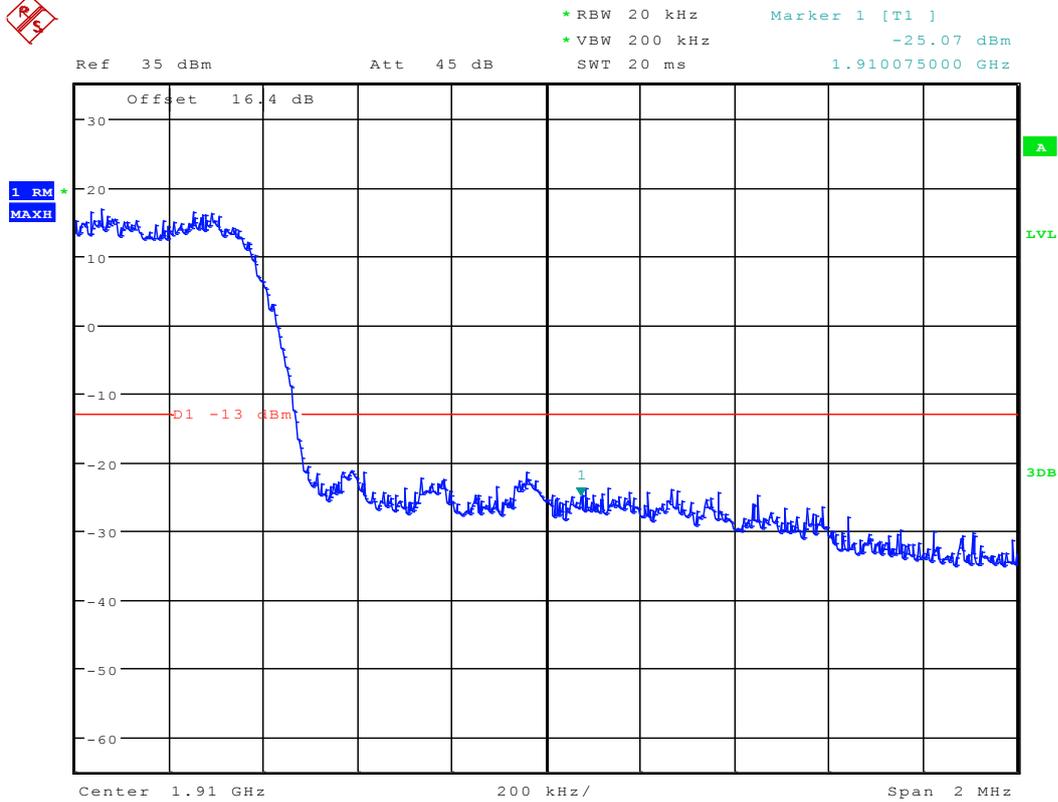




EVDO subtype 2


Modulation: BPSK

Left Edge (1850 MHz)
Channel 25

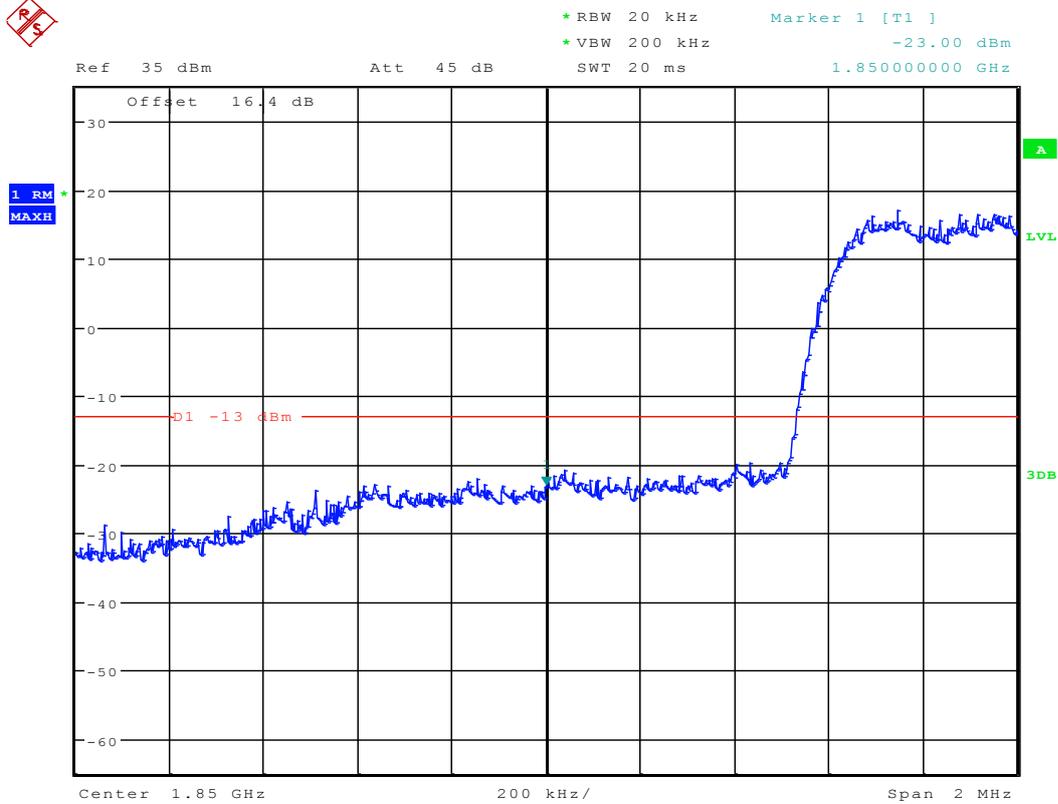




Right Edge (1910MHz) Channel 1175

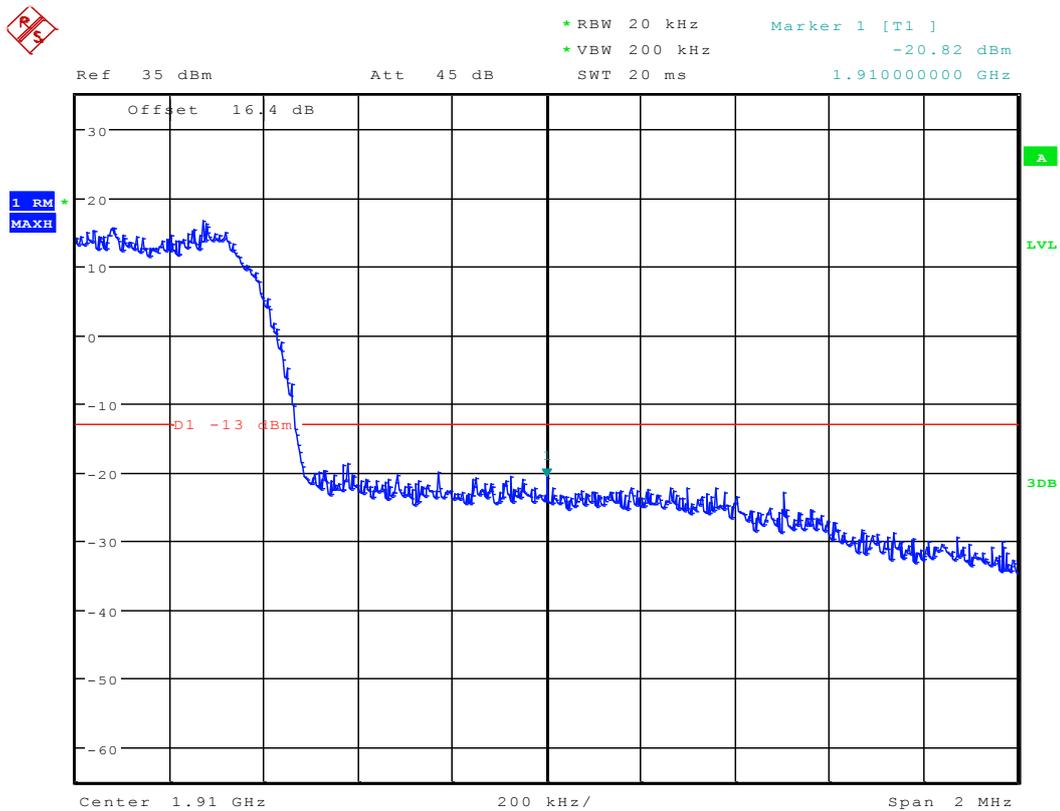




Modulation: QPSK

**Left Edge (1850 MHz)
Channel 25**

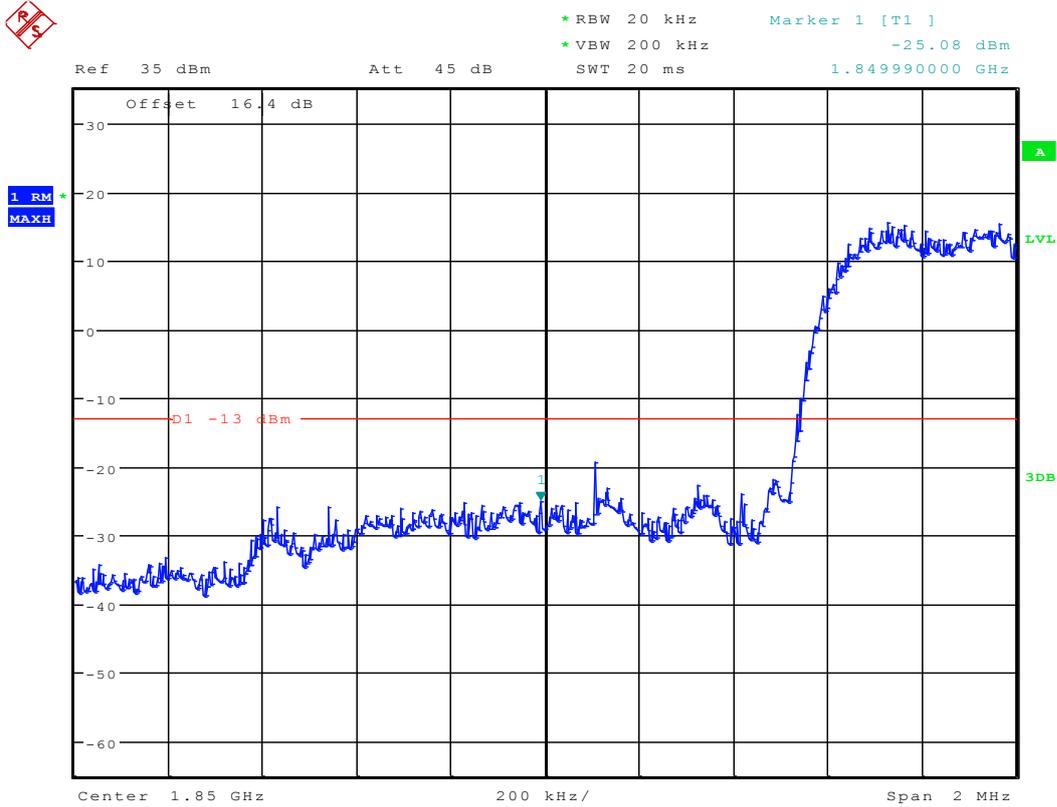




Modulation: 8PSK
Left Edge (1850 MHz)
Channel 25

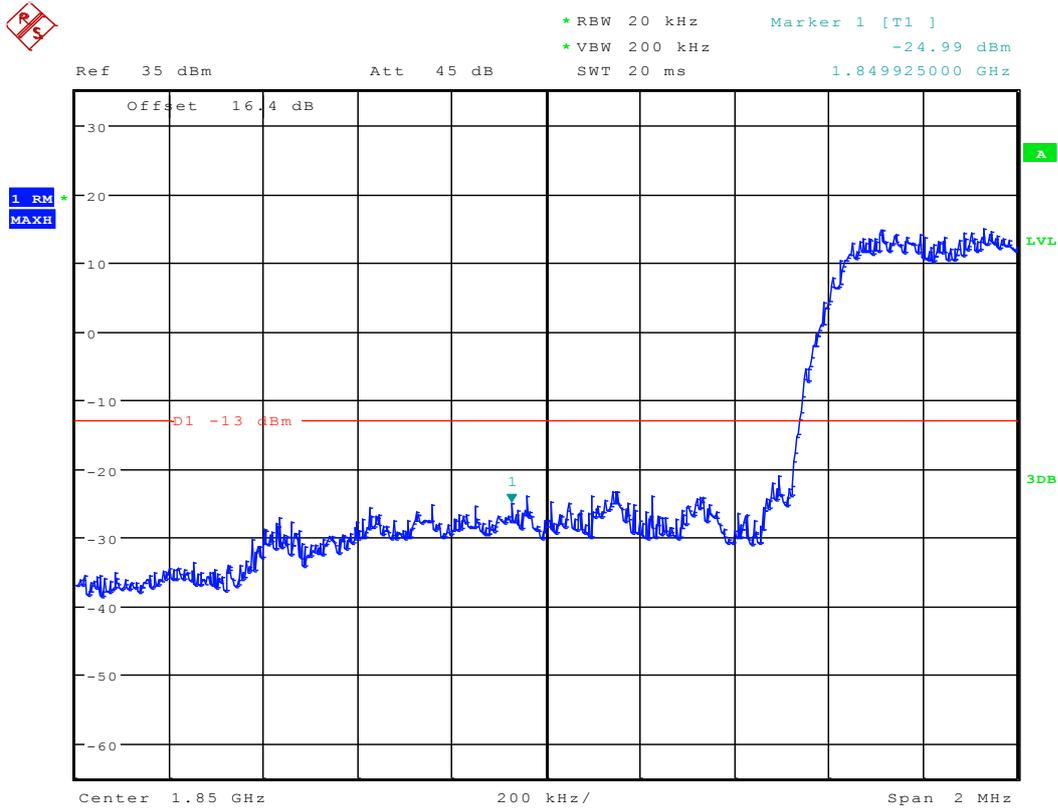



Right Edge (1910MHz) Channel 1175

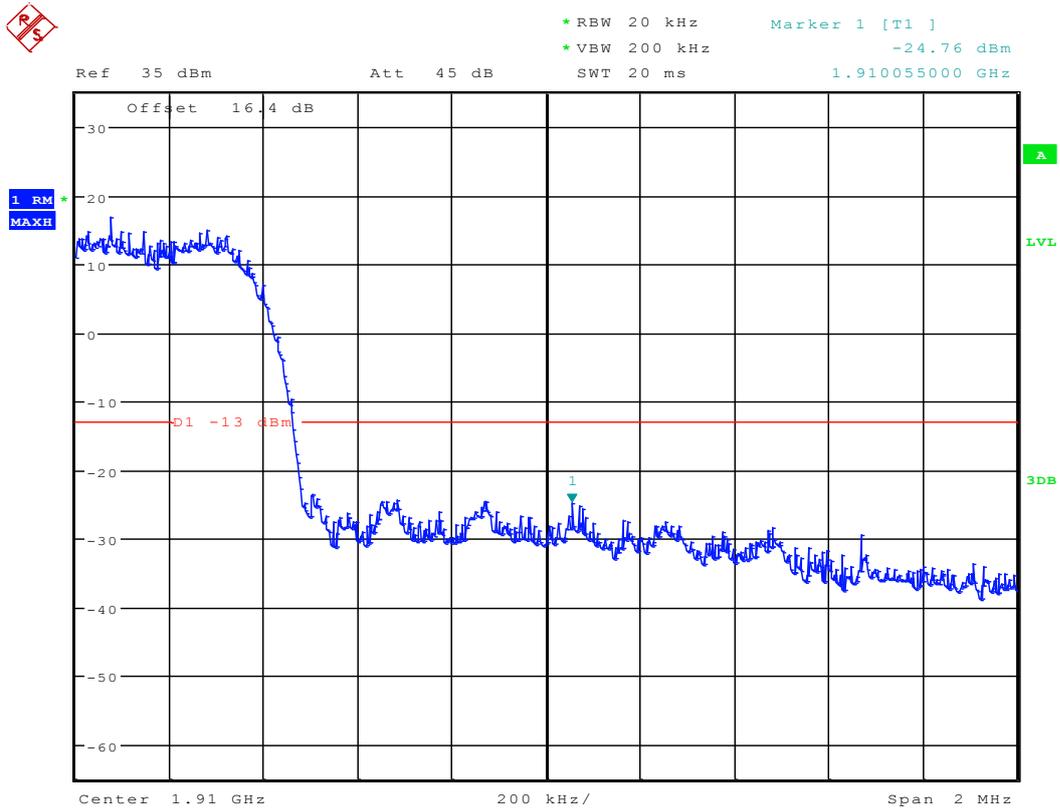

The END



Appendix E


Spurious Emission at Antenna Terminal

According to FCC Part 2.1051 & 24.238




TM1


Channel 25

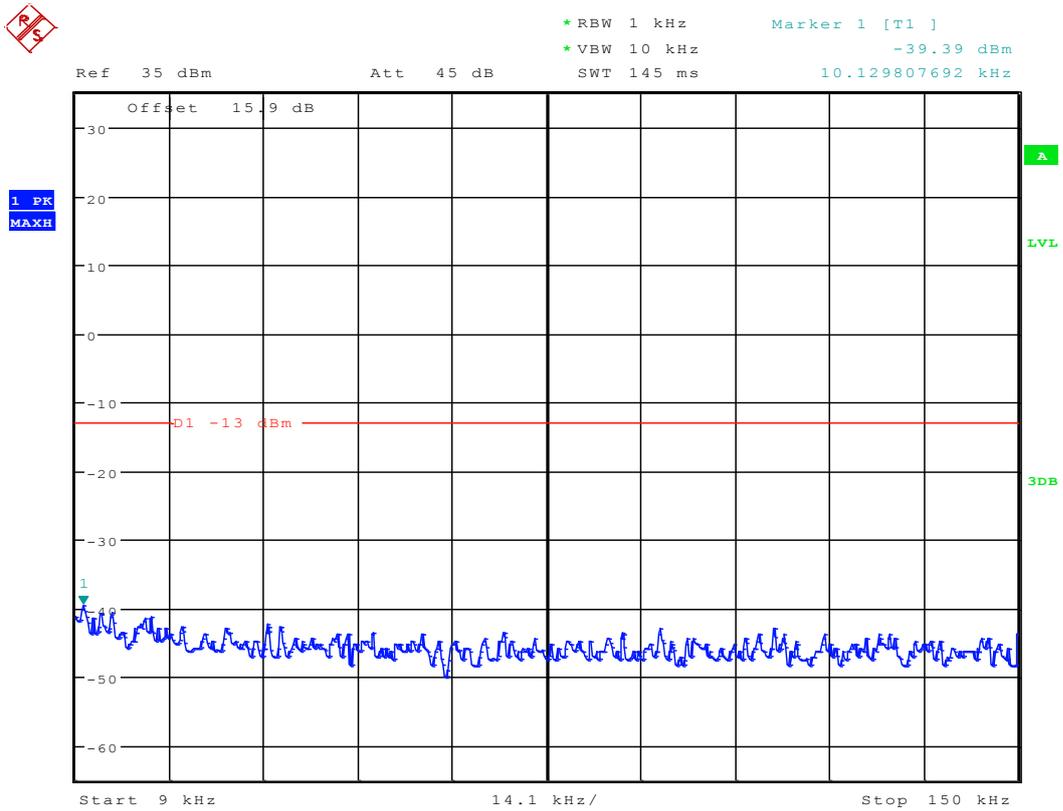




* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -32.13 dBm
Ref 35 dBm Att 45 dB SWT 300 ms 197.836538462 kHz

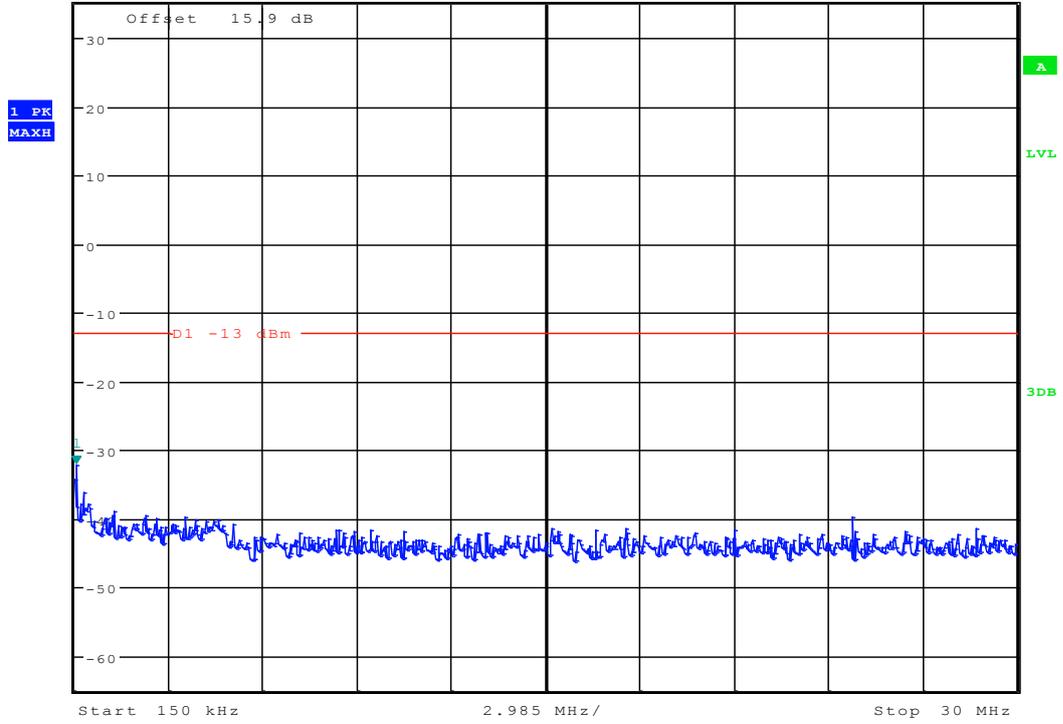


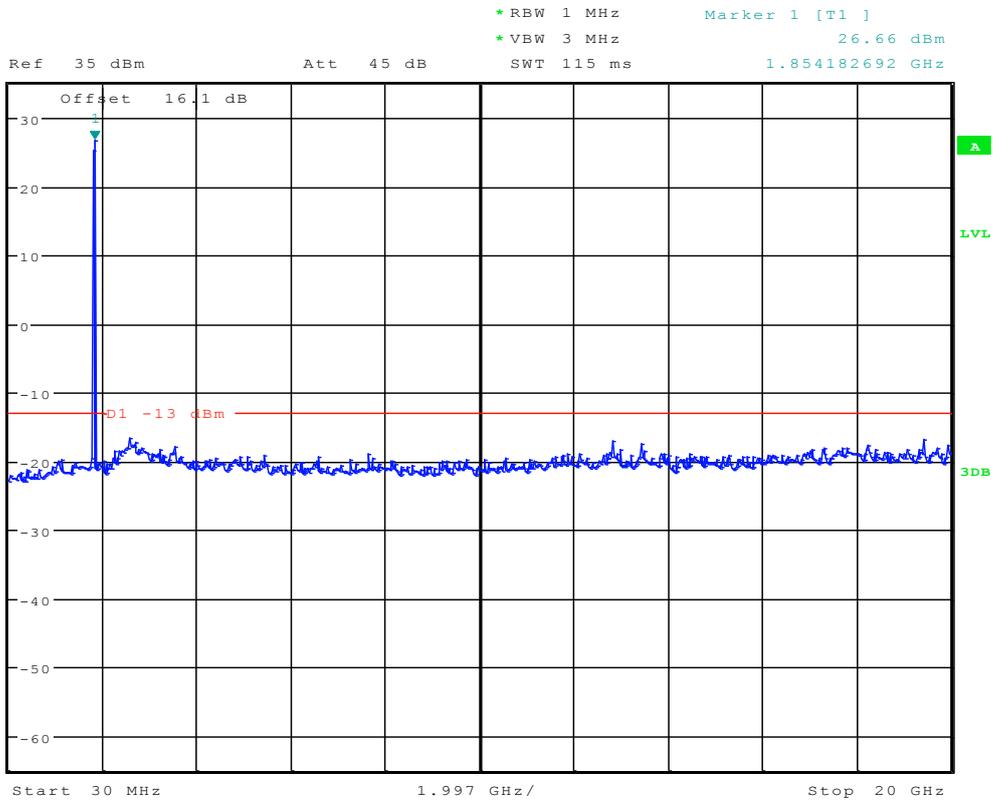




Channel 600

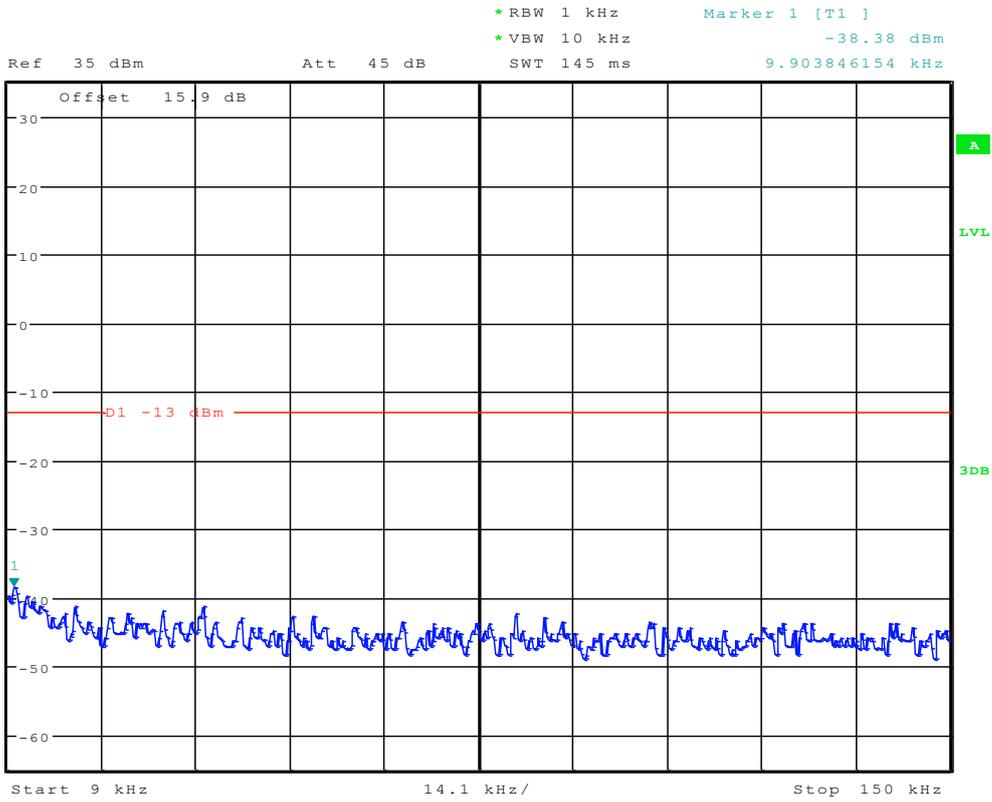

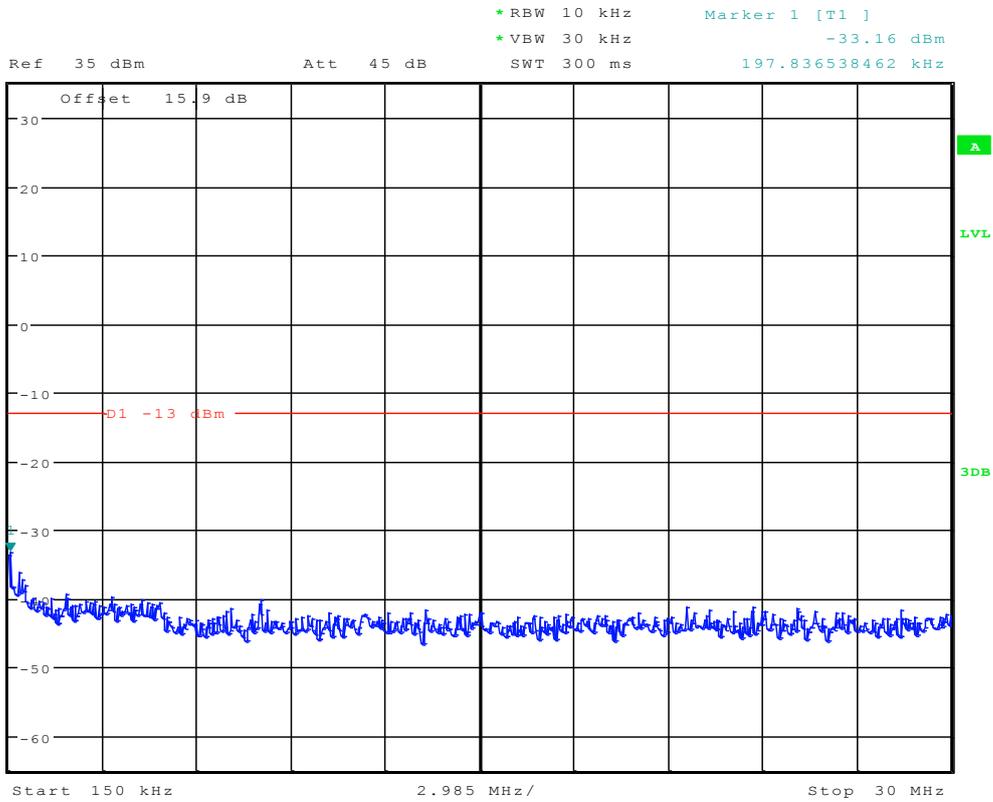

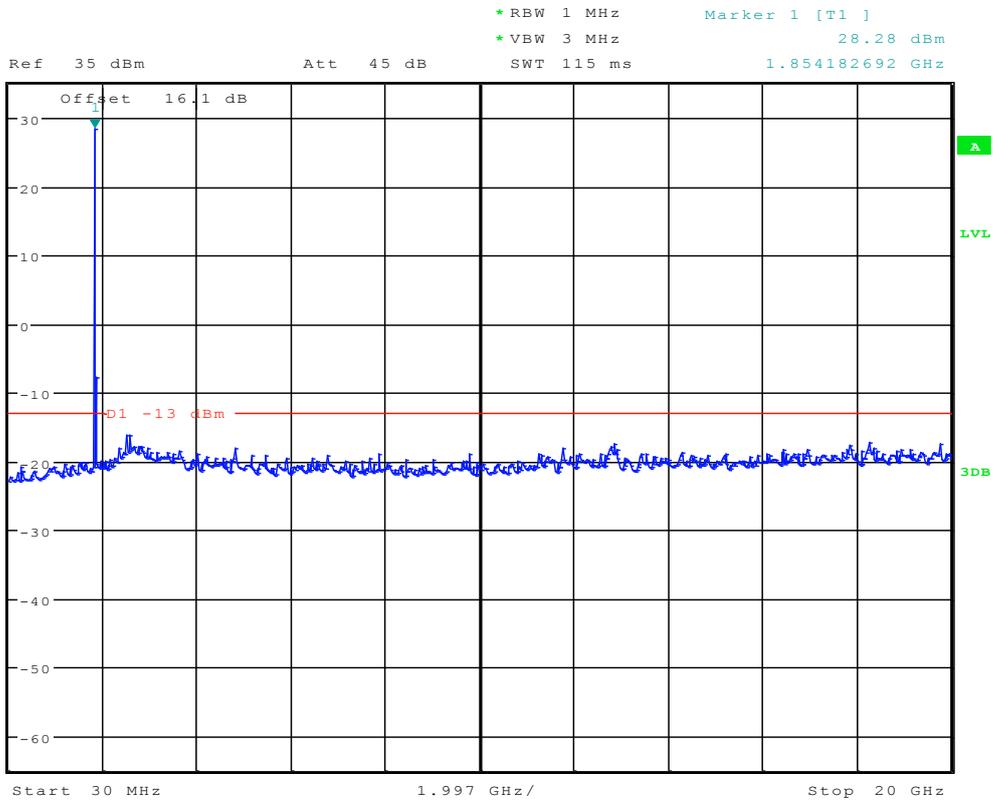




Channel 1175





*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -38.87 dBm
SWT 145 ms 15.100961538 kHz

Ref 35 dBm Att 45 dB

1 PK
MAXH

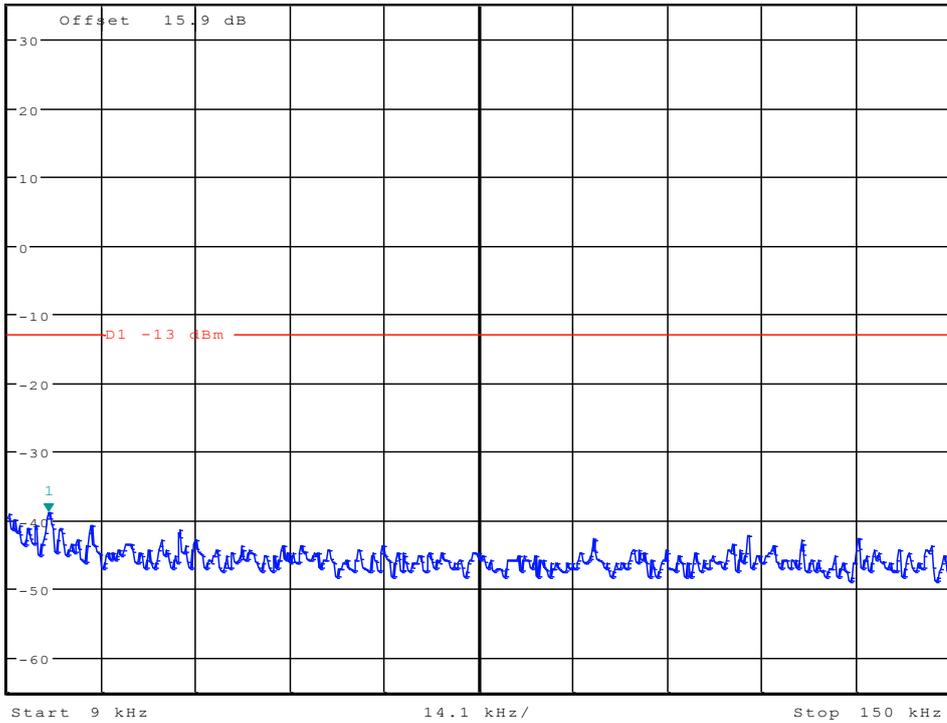

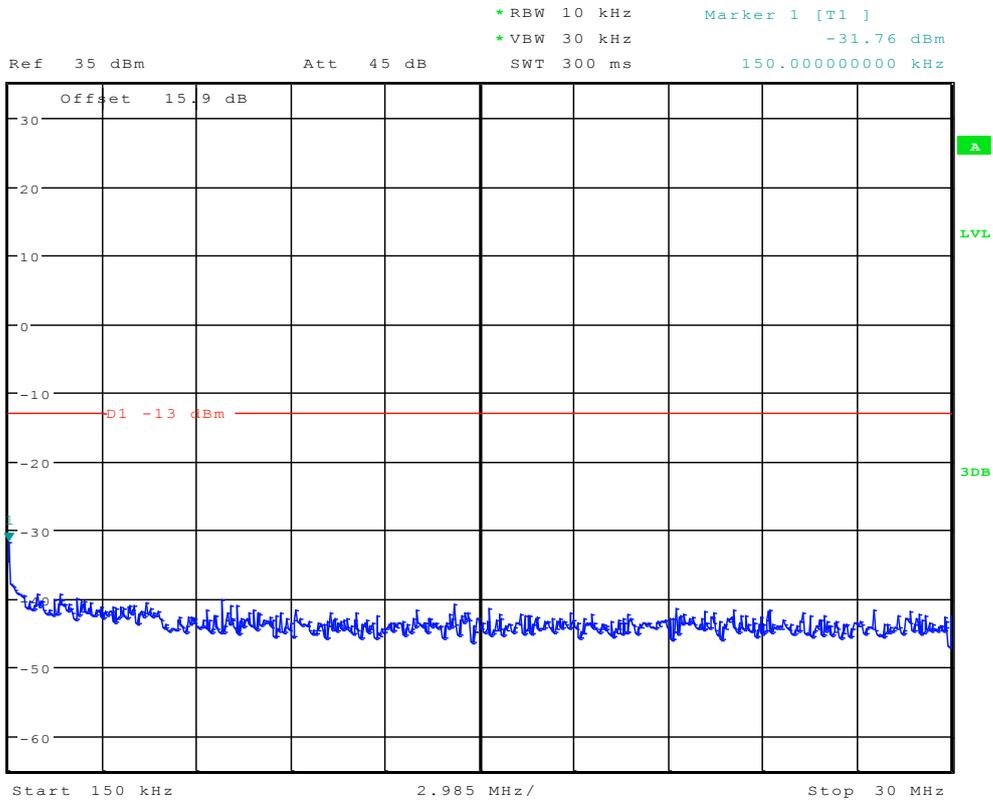


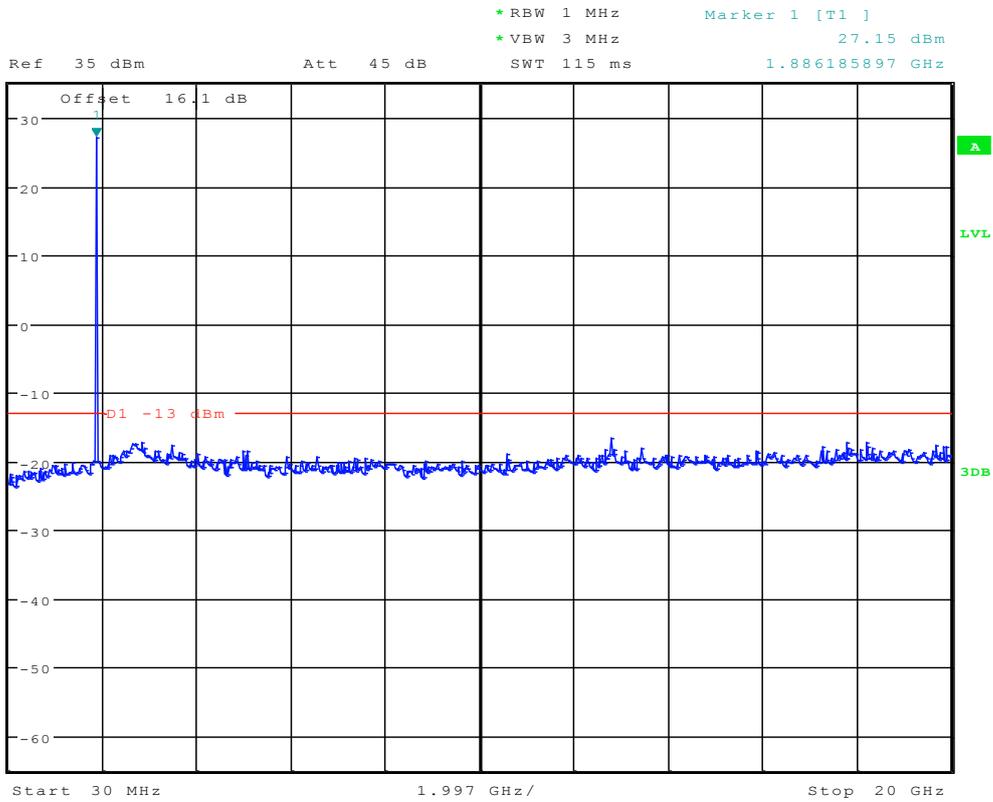




TM3


Channel 25

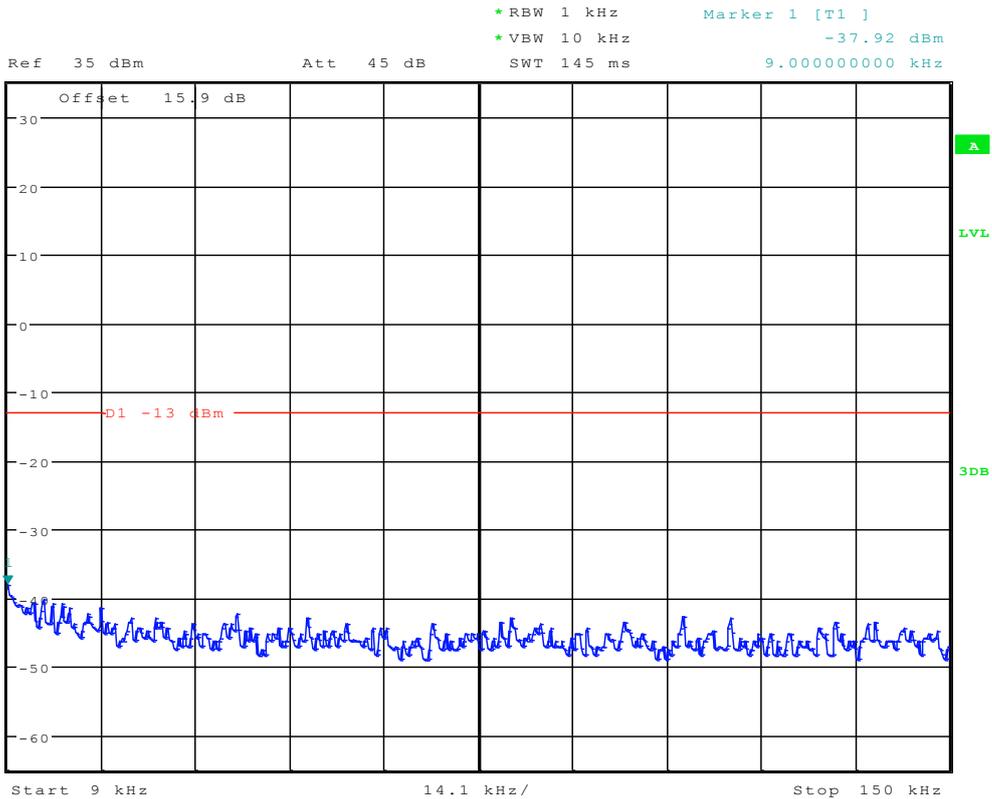



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -33.93 dBm
Ref 35 dBm Att 45 dB SWT 300 ms 150.00000000 kHz

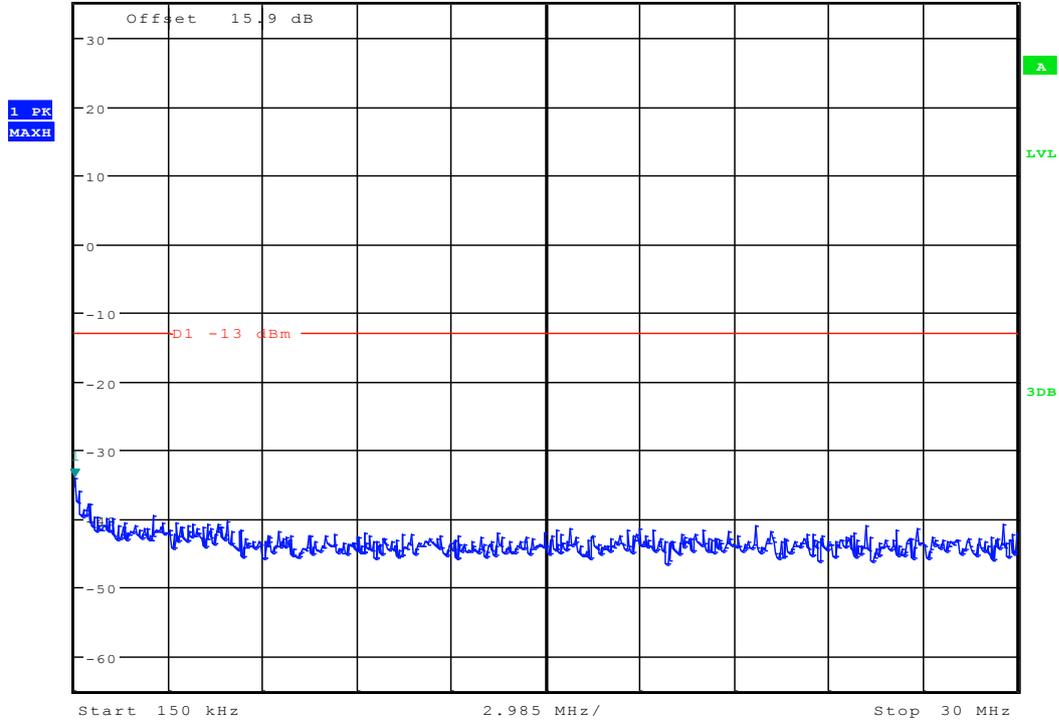

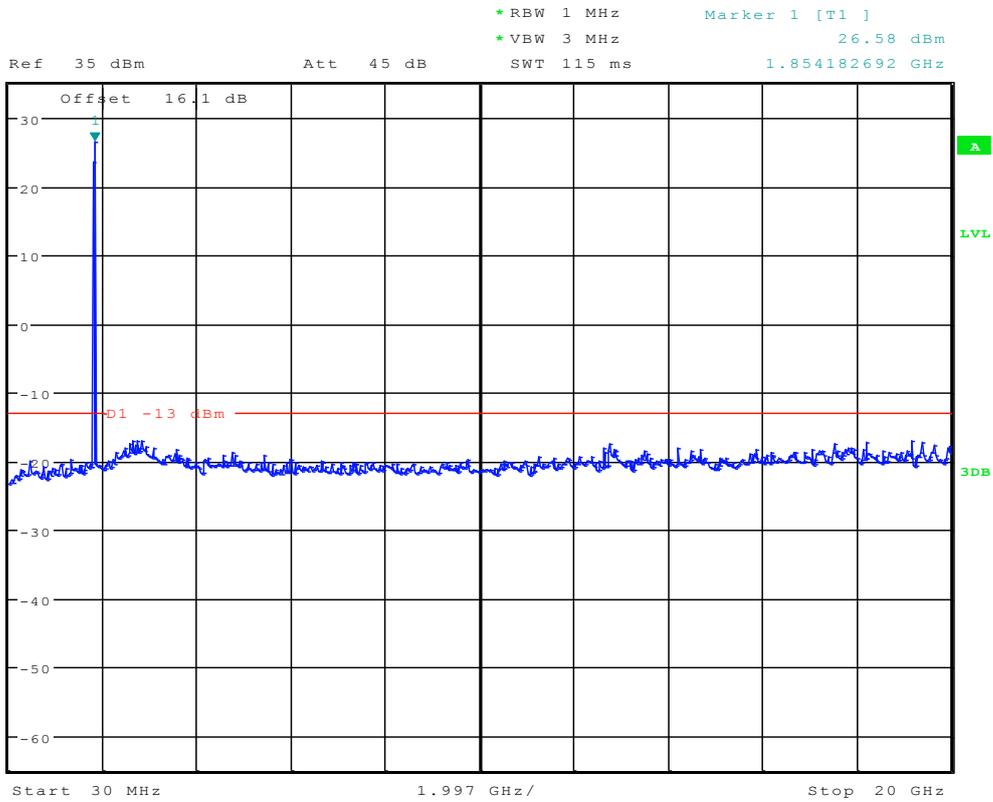




Channel 600



*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -38.67 dBm
SWT 145 ms 12.615384615 kHz


Ref 35 dBm Att 45 dB


1 PK
MAXH

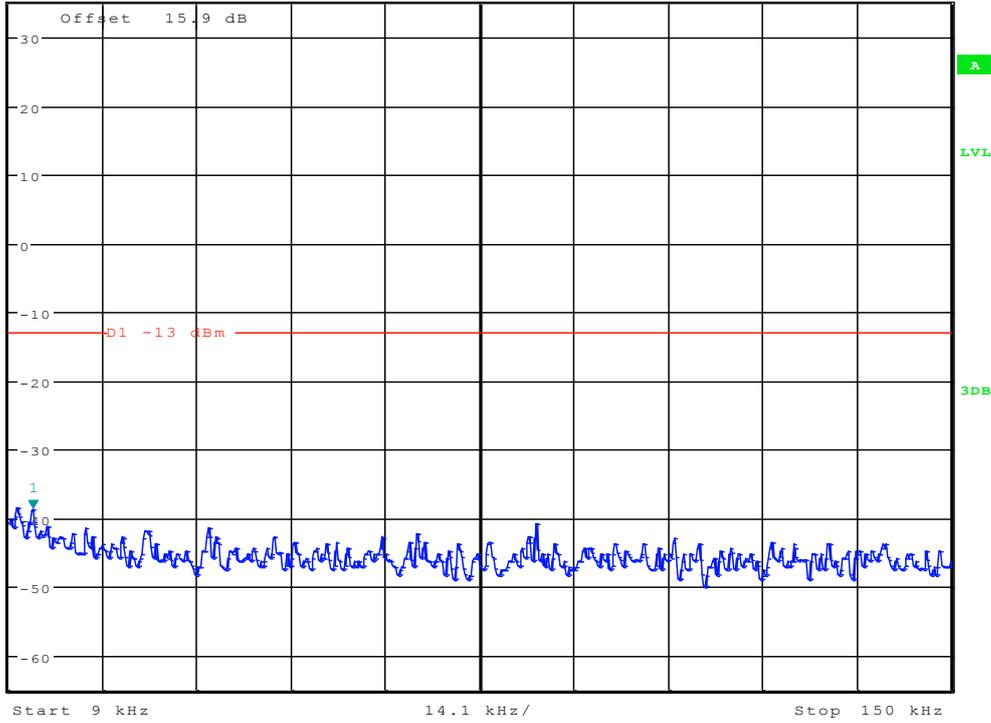



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -33.53 dBm
Ref 35 dBm Att 45 dB SWT 300 ms 197.836538462 kHz

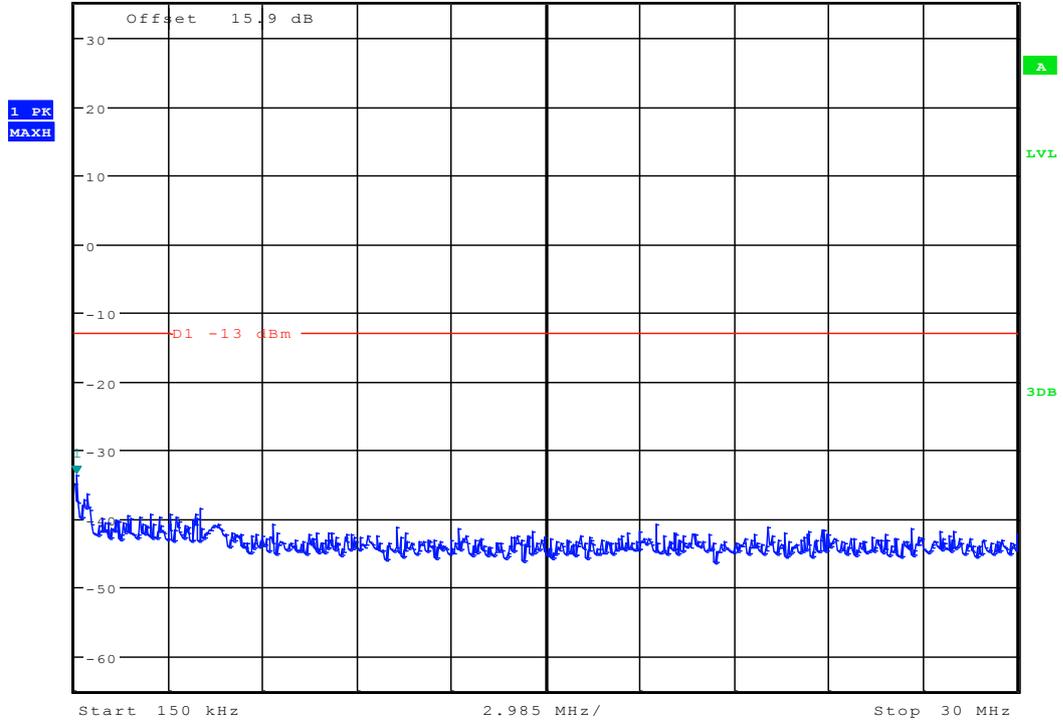

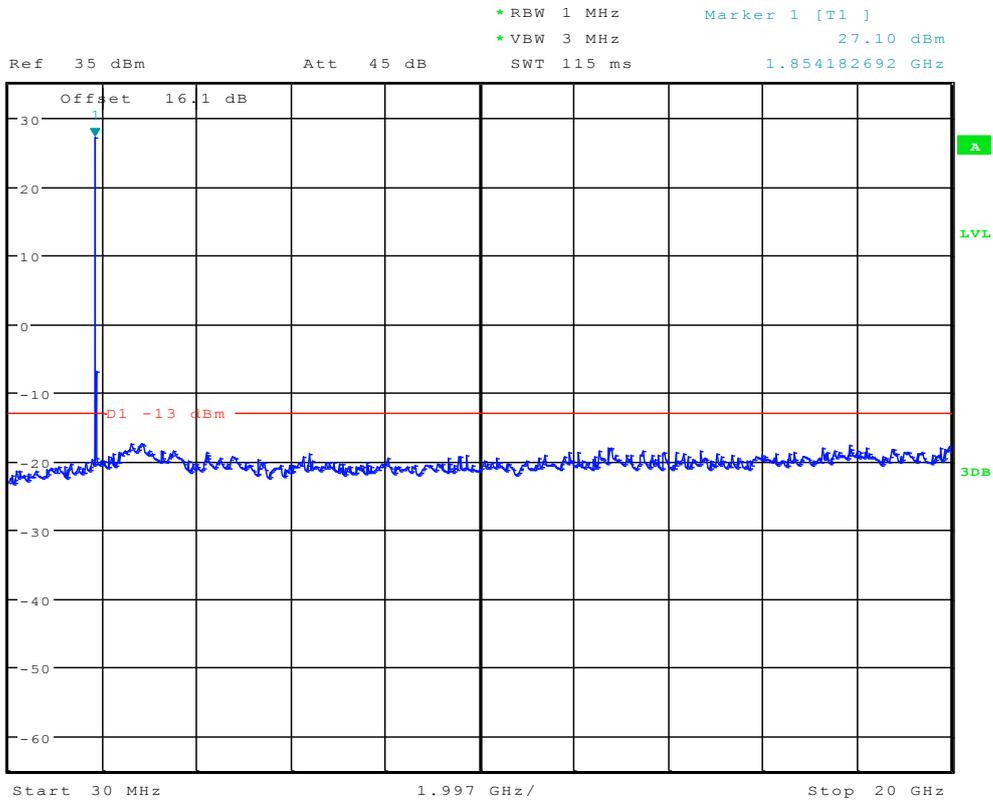




Channel 1175



*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -37.48 dBm
SWT 145 ms 9.000000000 kHz


Ref 35 dBm Att 45 dB


1 PK
MAXH

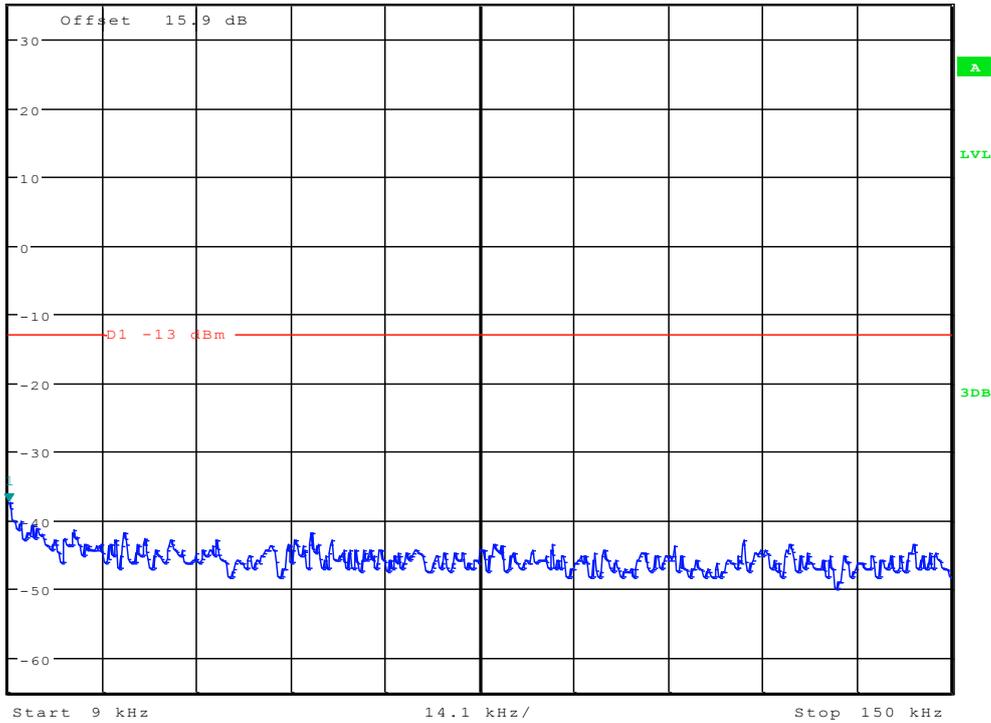



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -34.89 dBm
Ref 35 dBm Att 45 dB SWT 300 ms 197.836538462 kHz

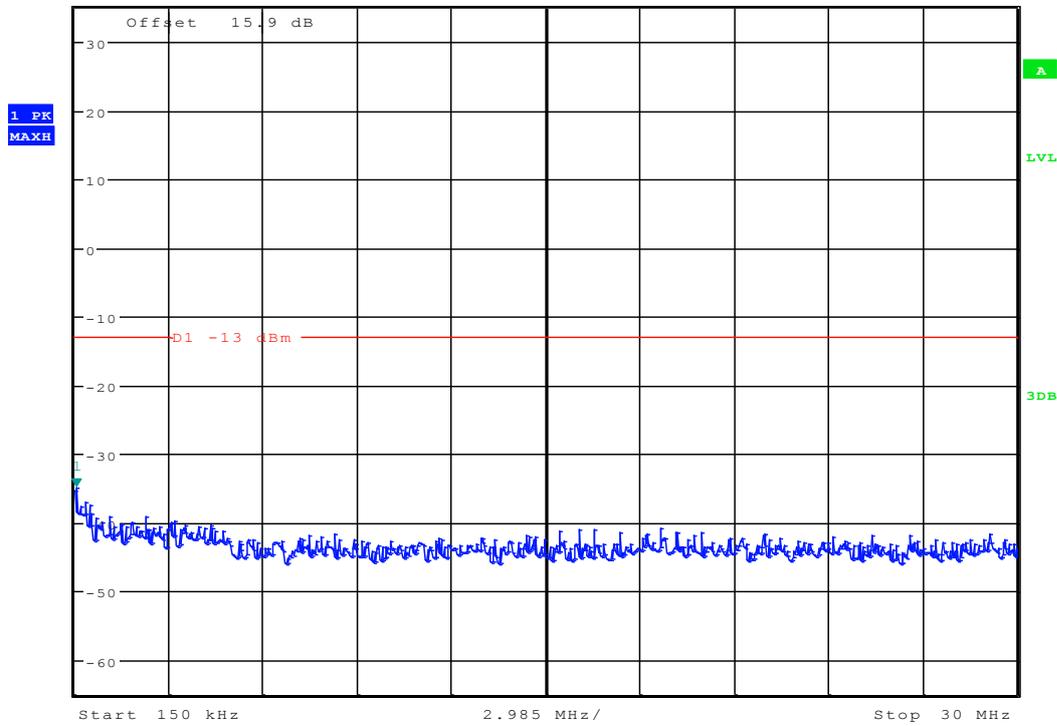

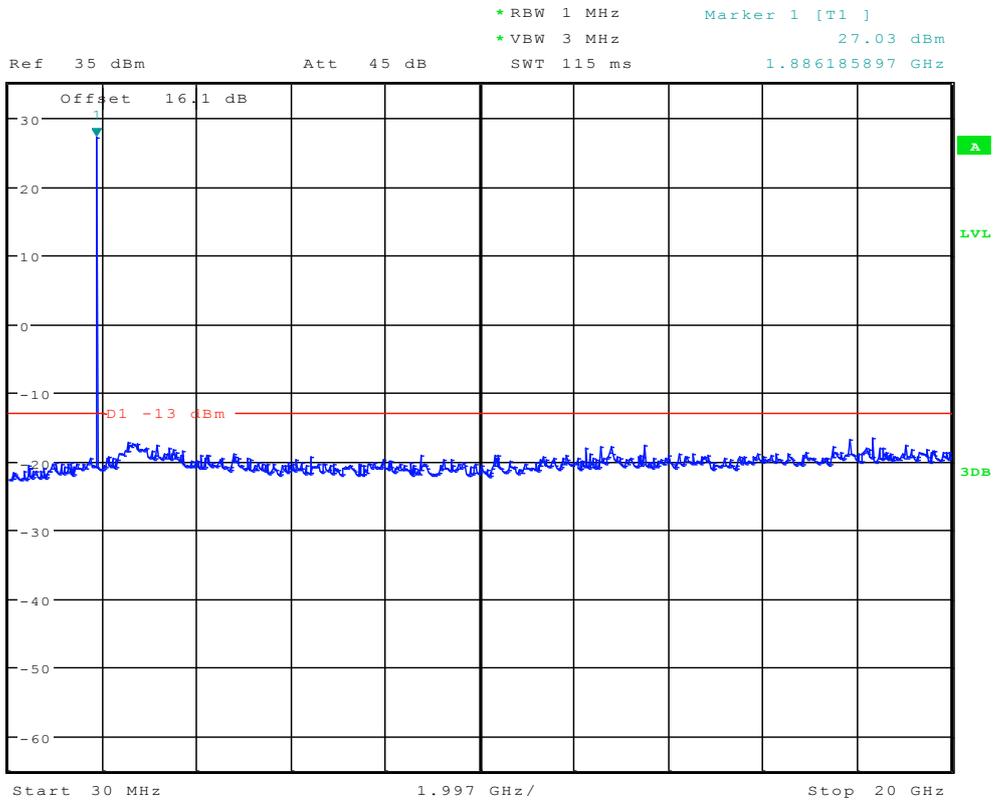





EVDO subtype 0 Channel 25




Ref 35 dBm Att 45 dB SWT 145 ms
*RBW 1 kHz *VBW 10 kHz
Marker 1 [T1] -37.48 dBm
9.451923077 kHz

1 PK
MAXH

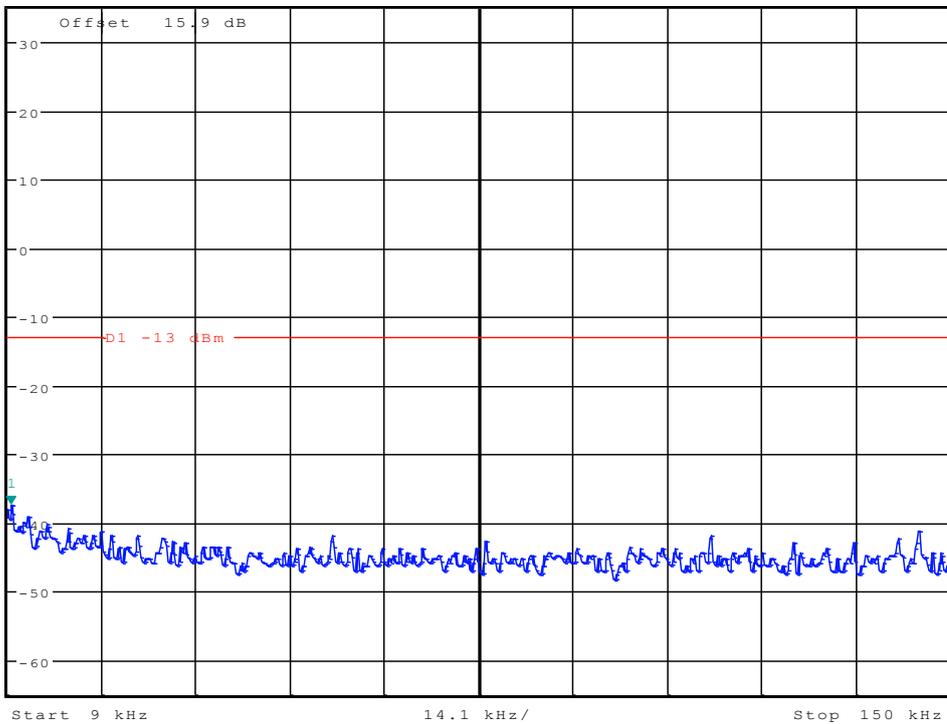

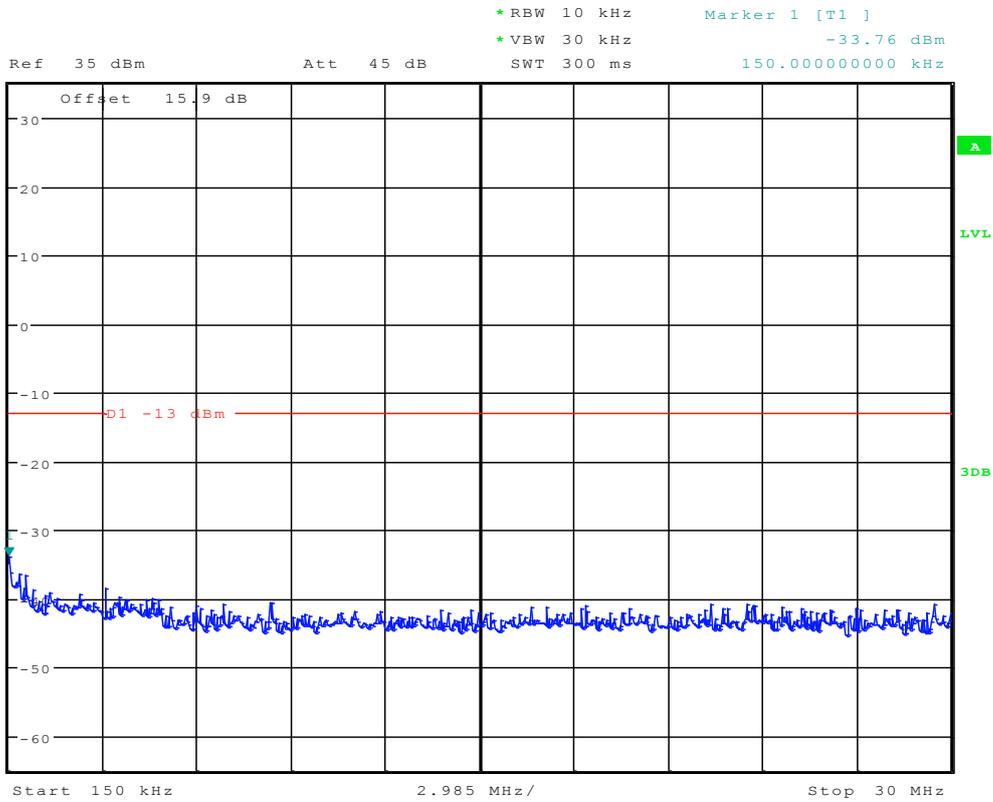

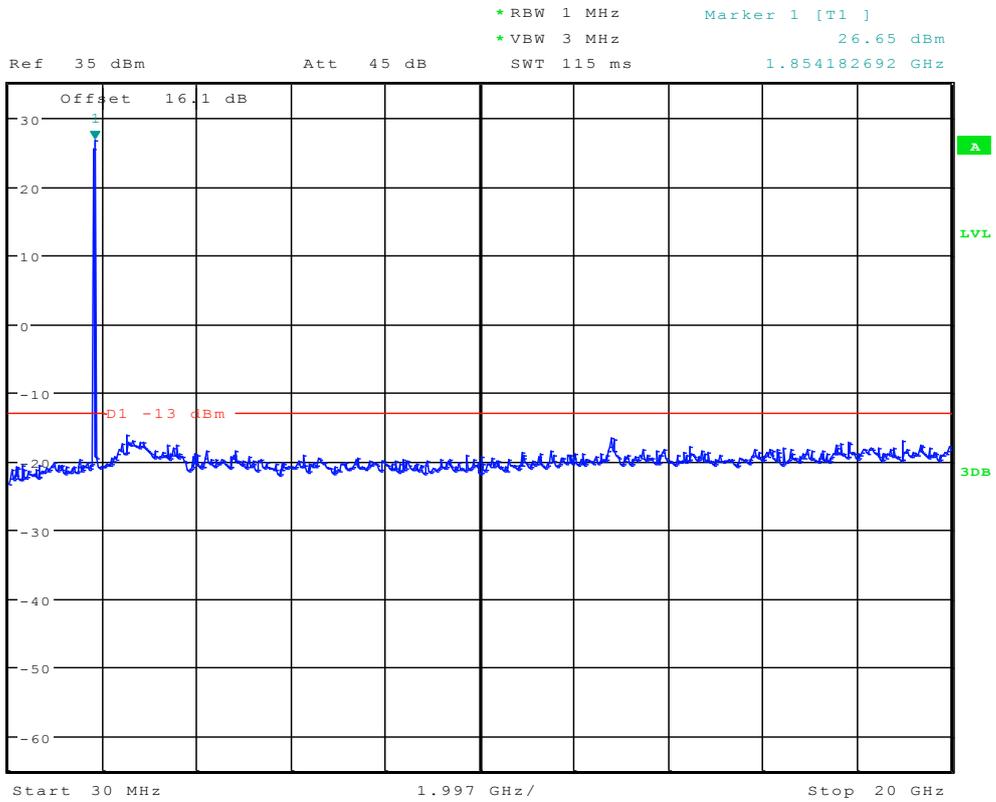




Channel 600



*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -37.92 dBm
SWT 145 ms 11.033653846 kHz


Ref 35 dBm


Att 45 dB

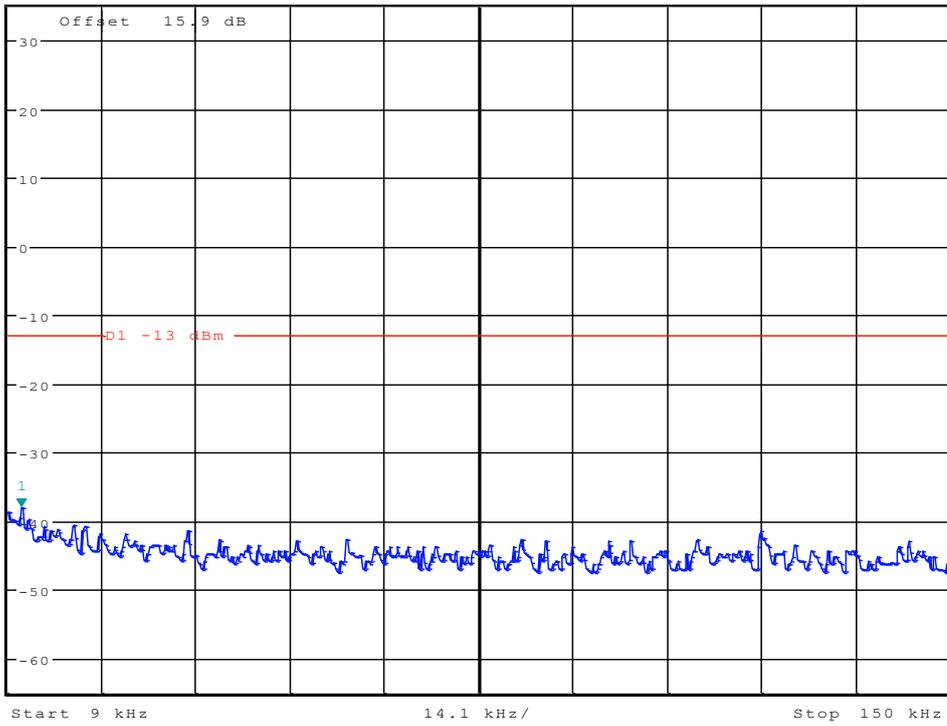



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -33.00 dBm
Ref 35 dBm Att 45 dB SWT 300 ms 197.836538462 kHz

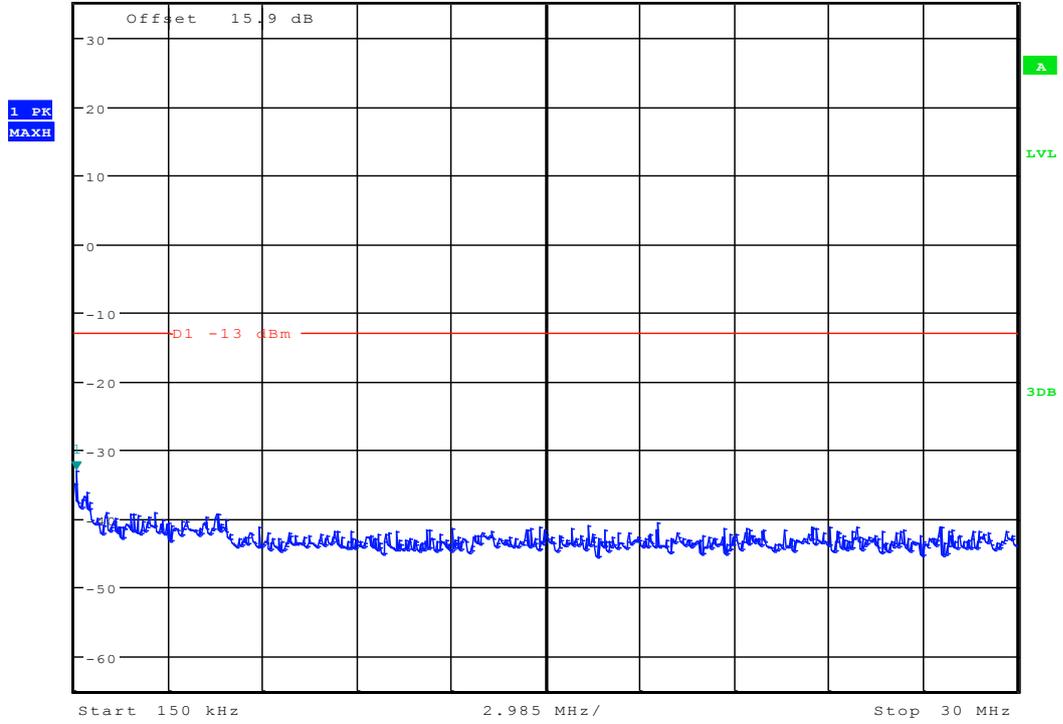

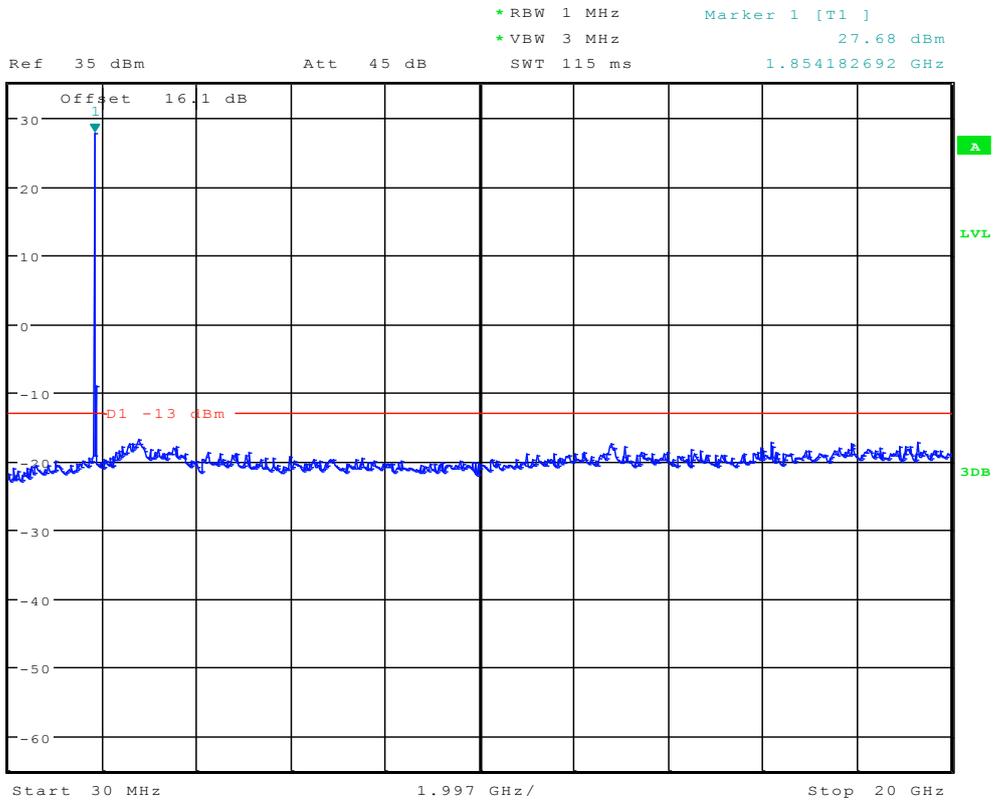



Channel 1175




*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -38.67 dBm
SWT 145 ms 9.903846154 kHz

Ref 35 dBm

Att 45 dB

9.903846154 kHz

1 PK
MAXH

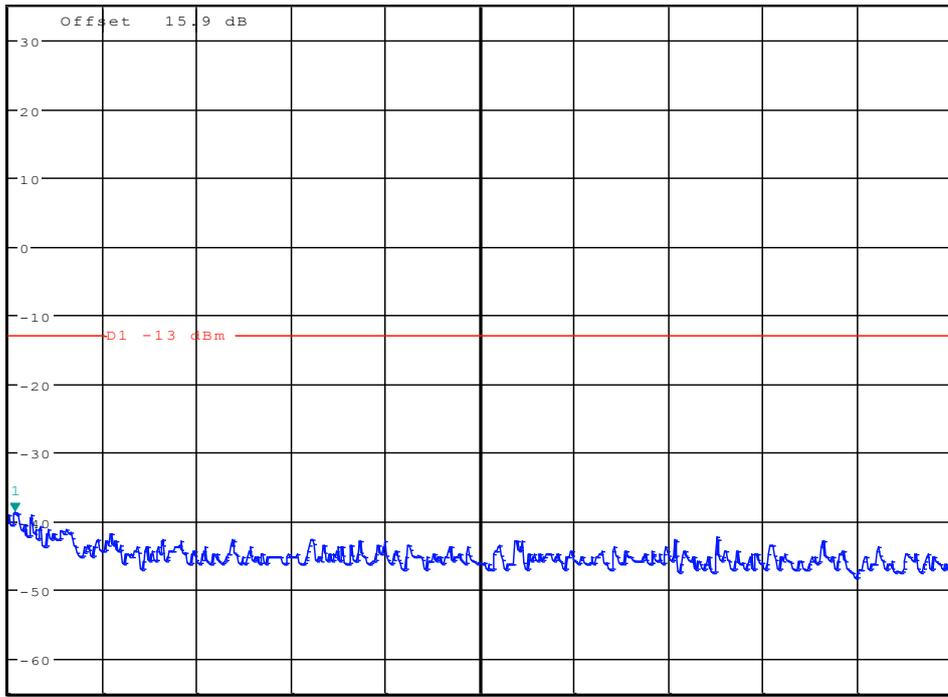


Start 9 kHz


14.1 kHz/

Stop 150 kHz



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -33.00 dBm
Ref 35 dBm Att 45 dB SWT 300 ms 197.836538462 kHz

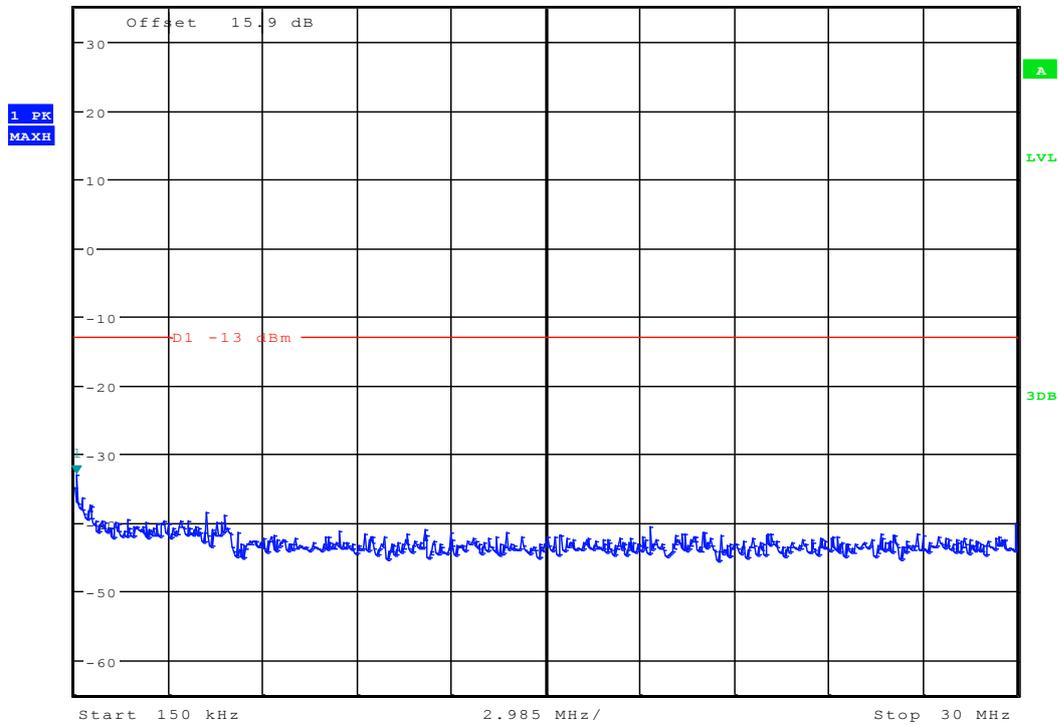

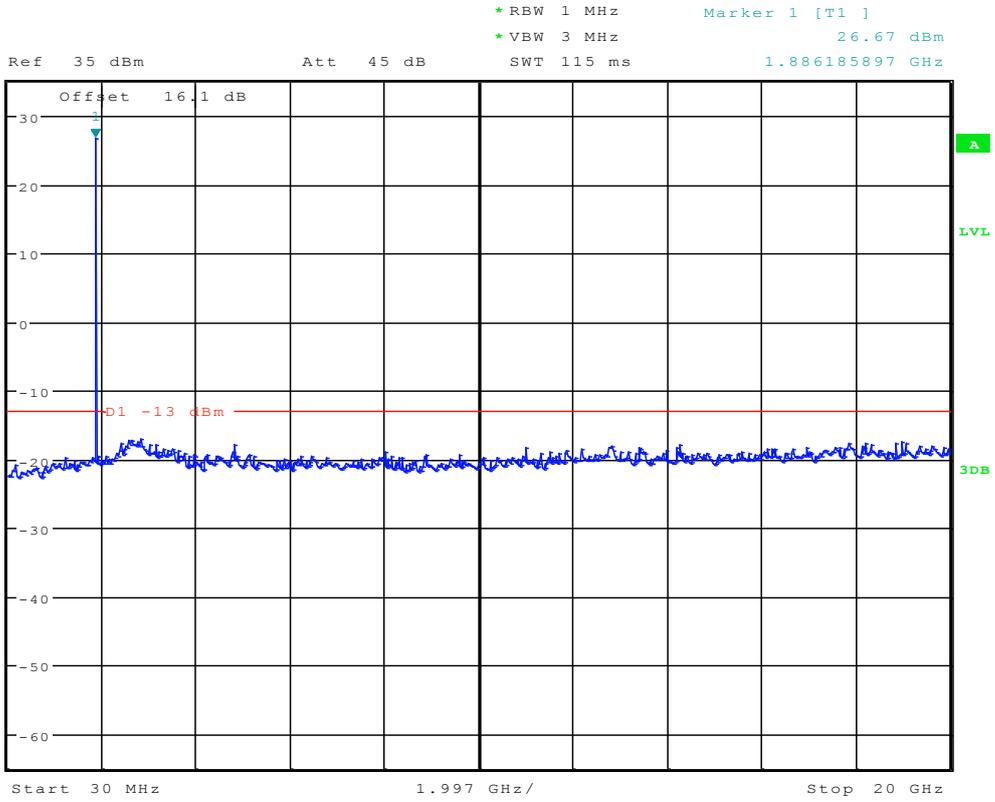



EVDO subtype 2


Modulation: BPSK
Channel 25



* RBW 1 kHz Marker 1 [T1]
* VBW 10 kHz -40.18 dBm
SWT 145 ms 9.000000000 kHz


Ref 35 dBm


Att 45 dB

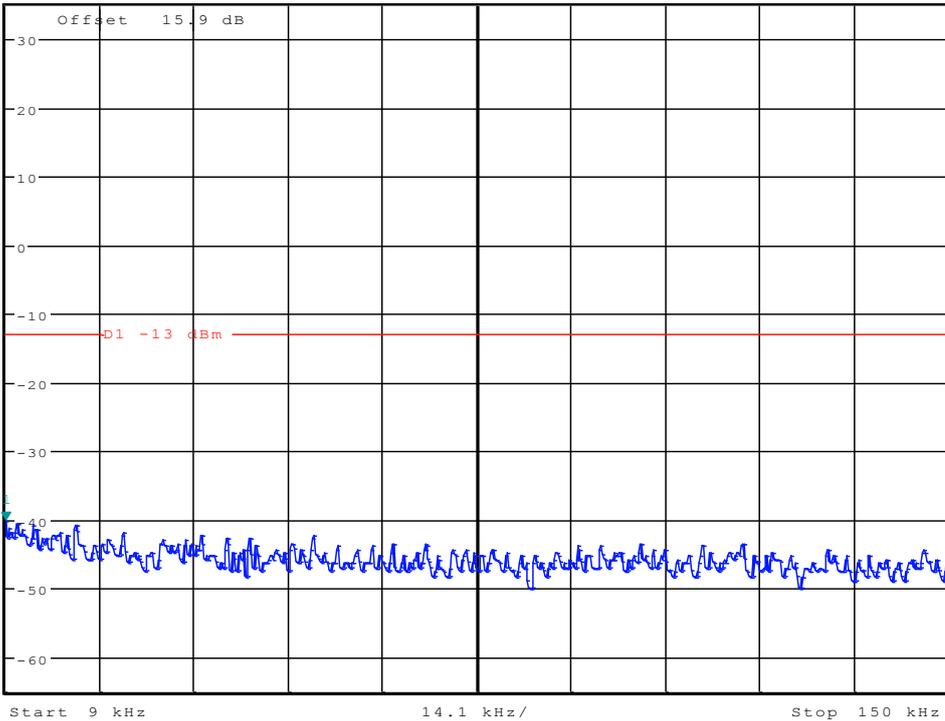



*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -33.11 dBm
Ref 35 dBm Att 45 dB SWT 300 ms 197.836538462 kHz

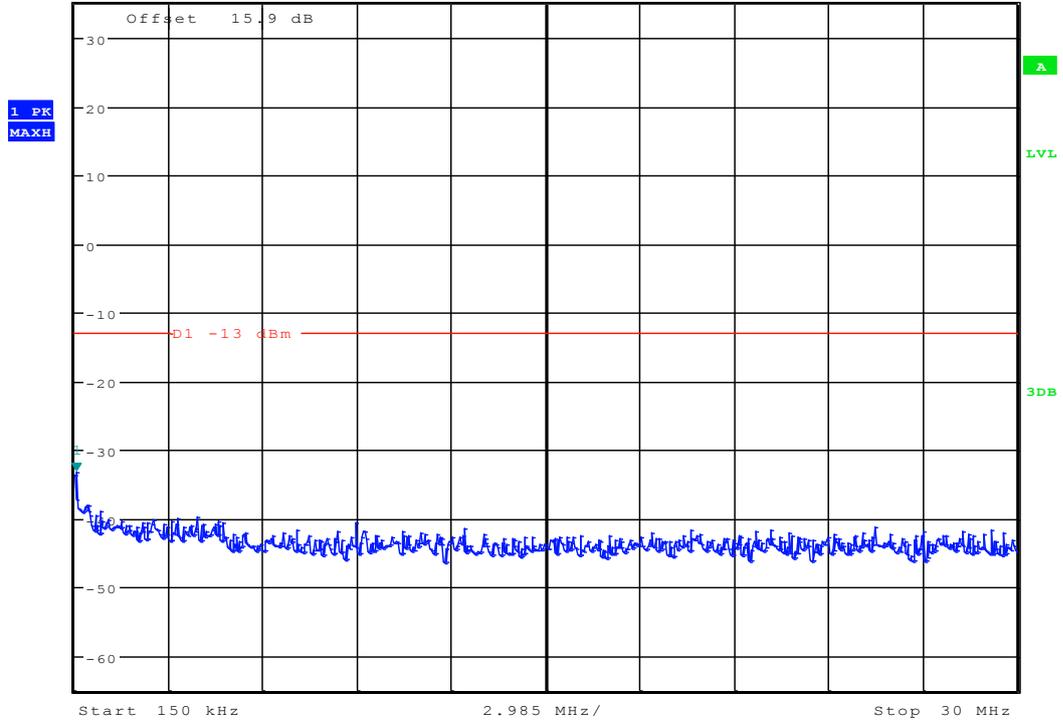

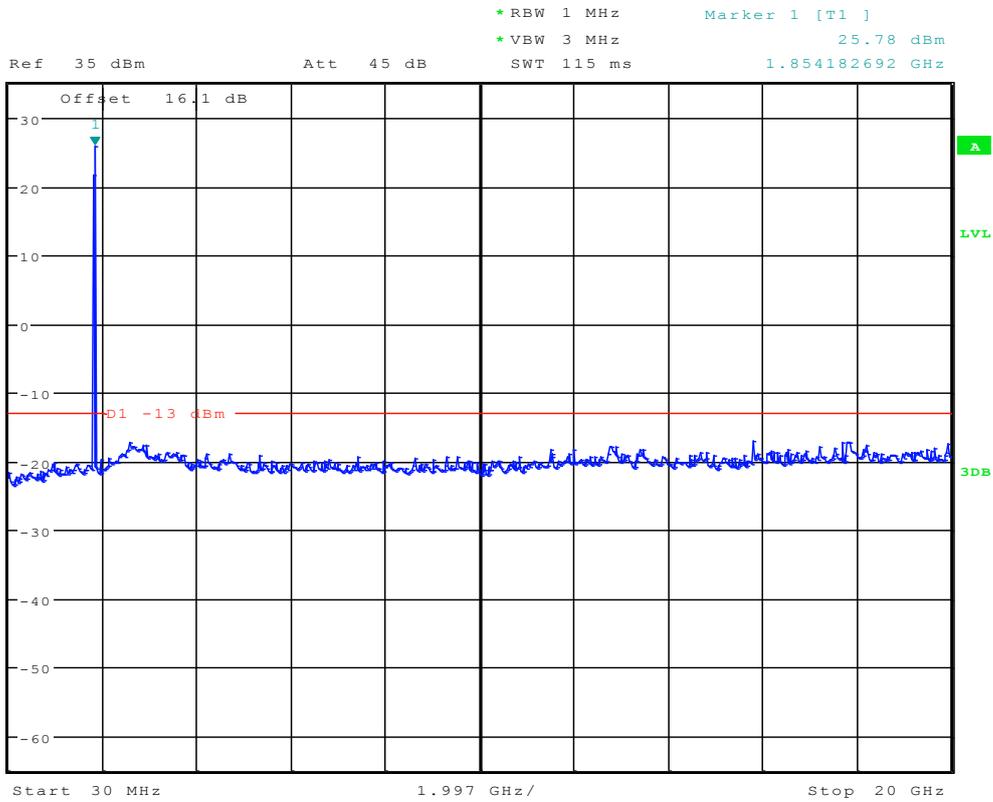




Channel 600





*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -38.19 dBm
Ref 35 dBm Att 45 dB SWT 145 ms 9.000000000 kHz

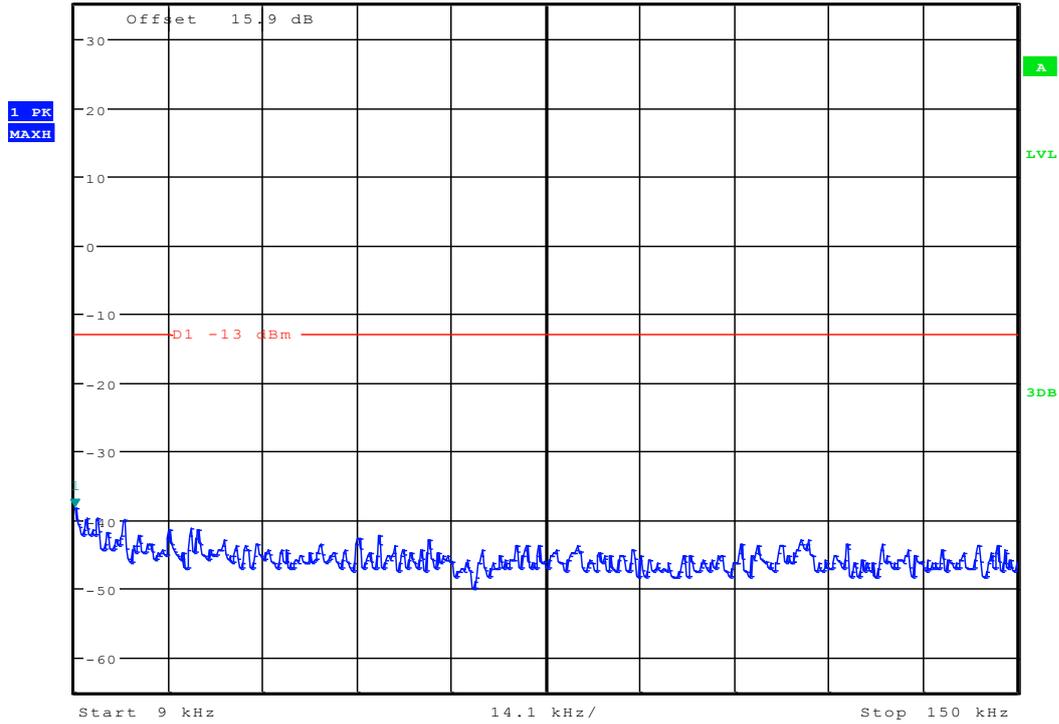



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -34.58 dBm
Ref 35 dBm Att 45 dB SWT 300 ms 150.000000000 kHz

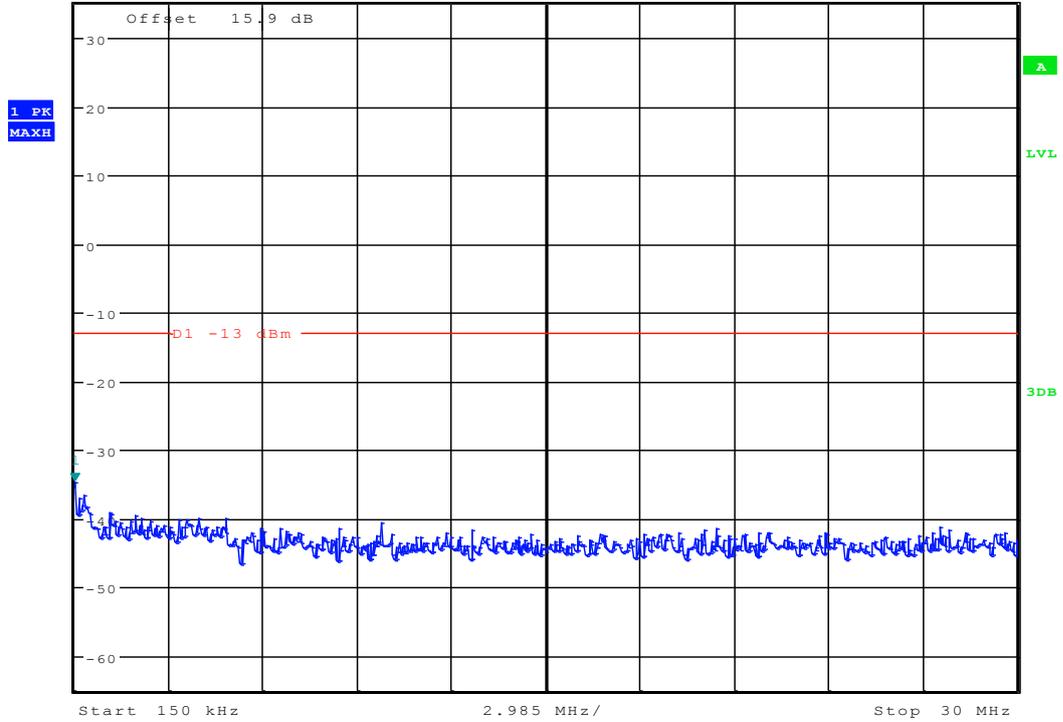

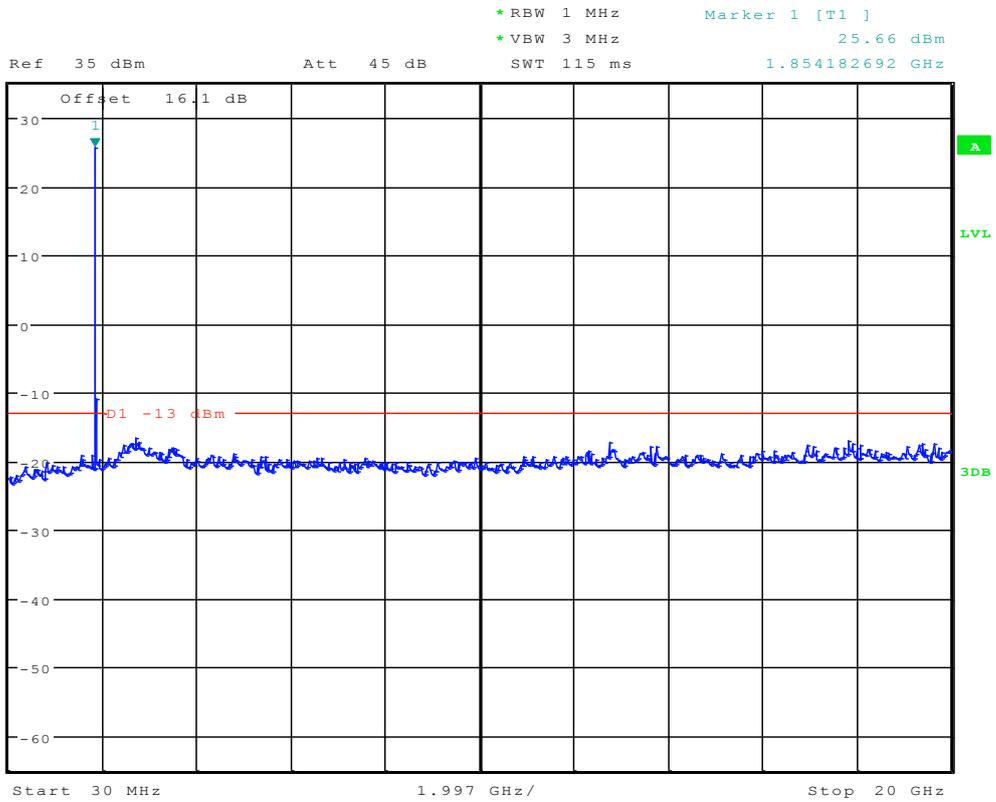




Channel 1175





Ref 35 dBm Att 45 dB *RBW 1 kHz Marker 1 [T1] -38.38 dBm
*VBW 10 kHz SWT 145 ms 10.807692308 kHz

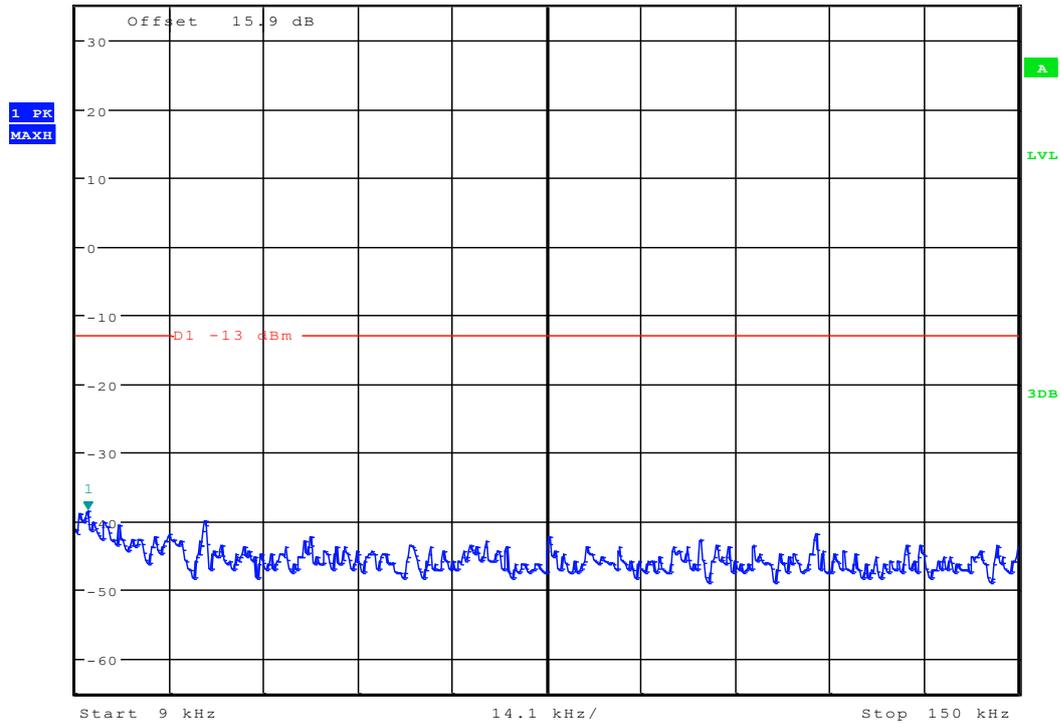



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -33.32 dBm
SWT 300 ms 150.000000000 kHz

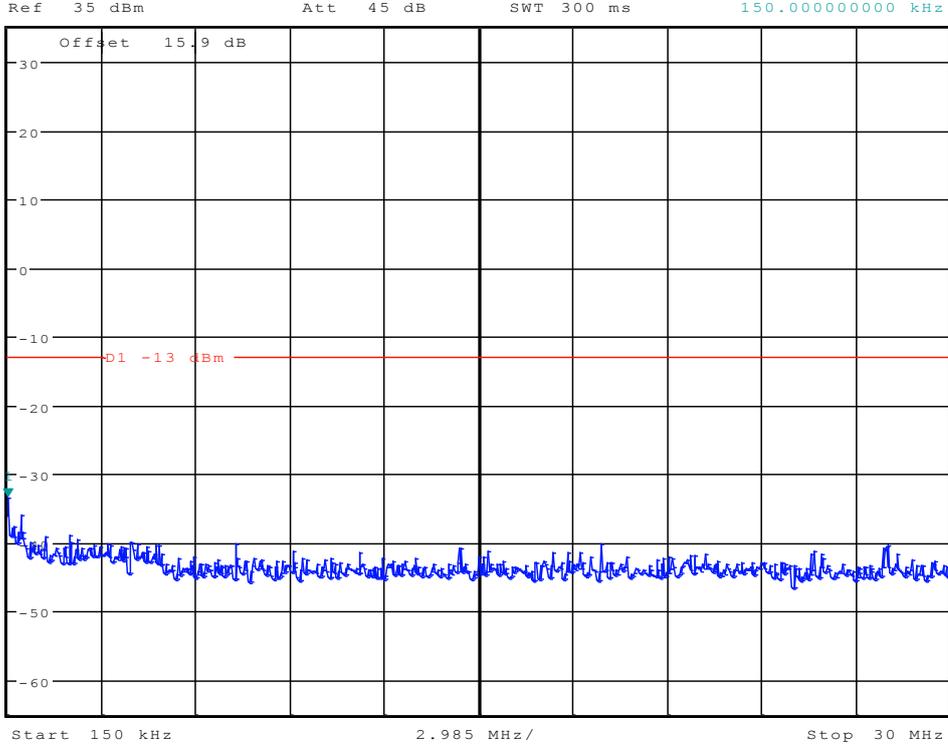


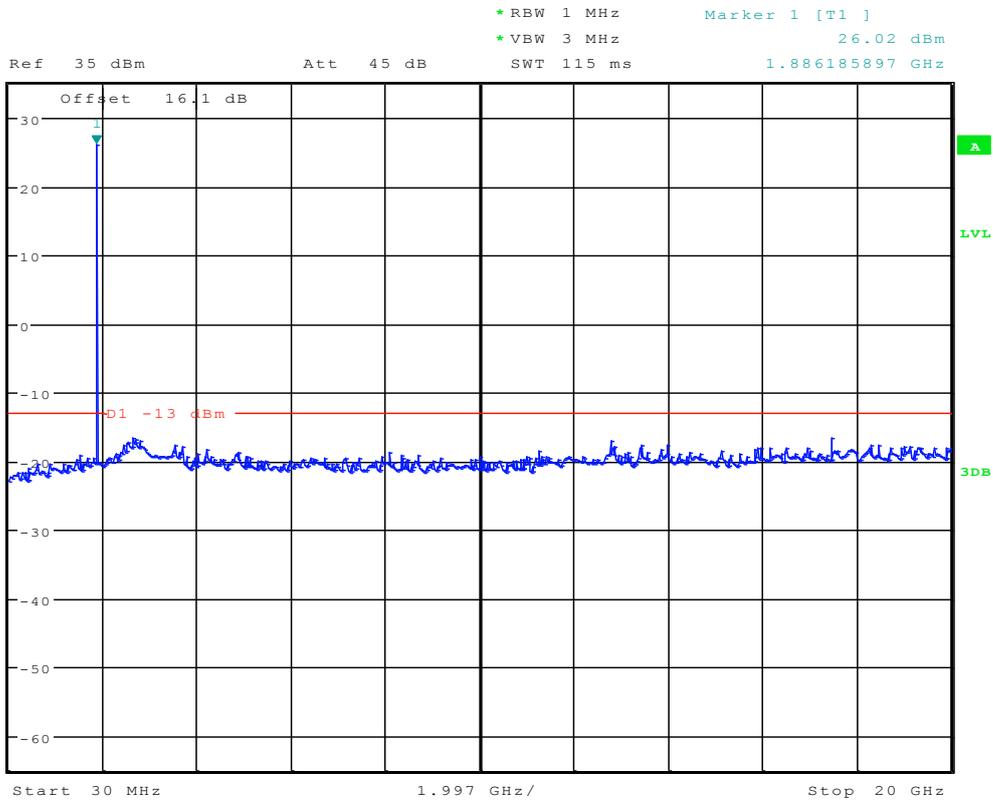





Modulation:QPSK

Channel 25

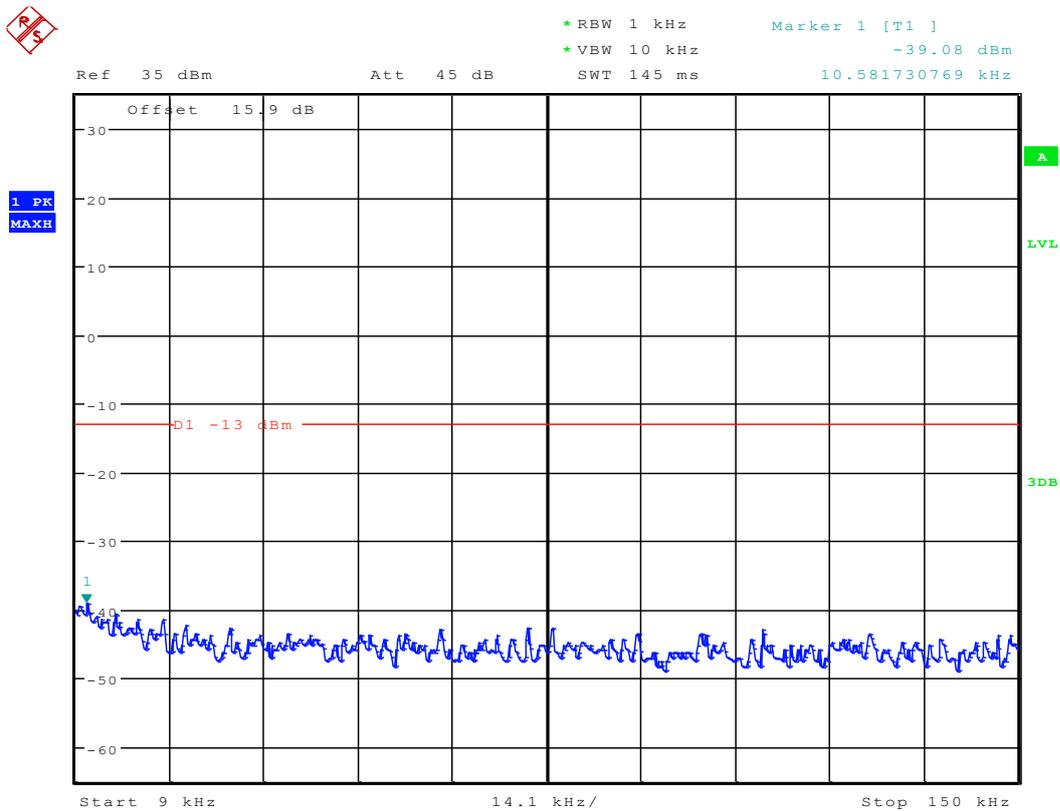

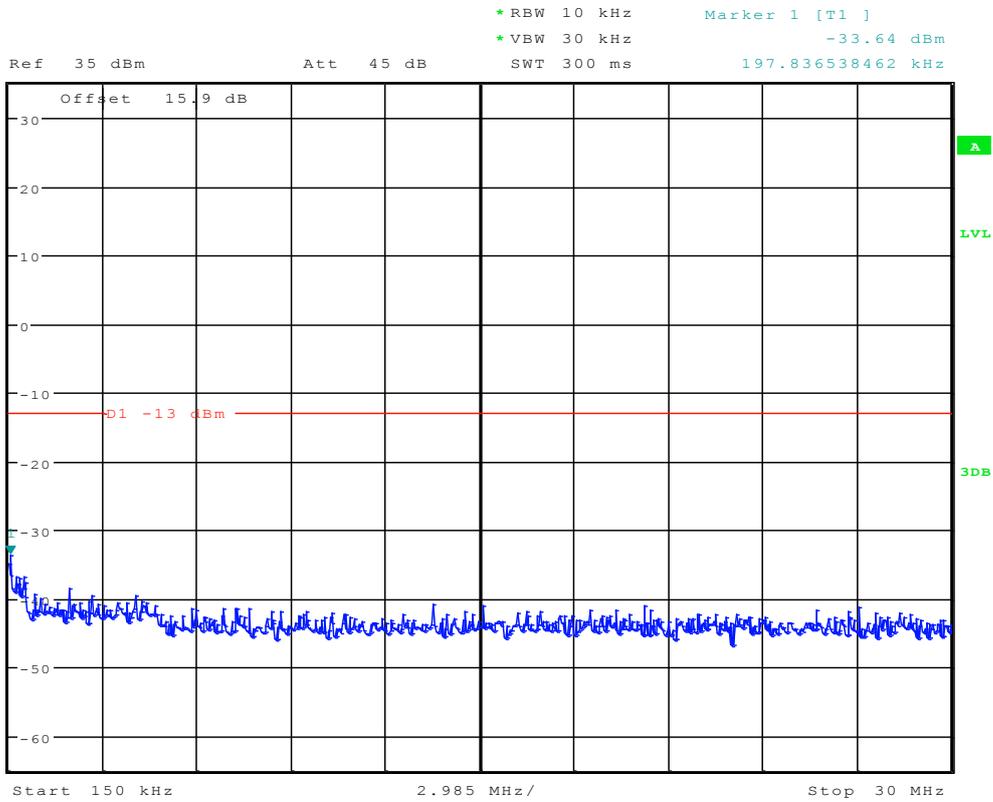

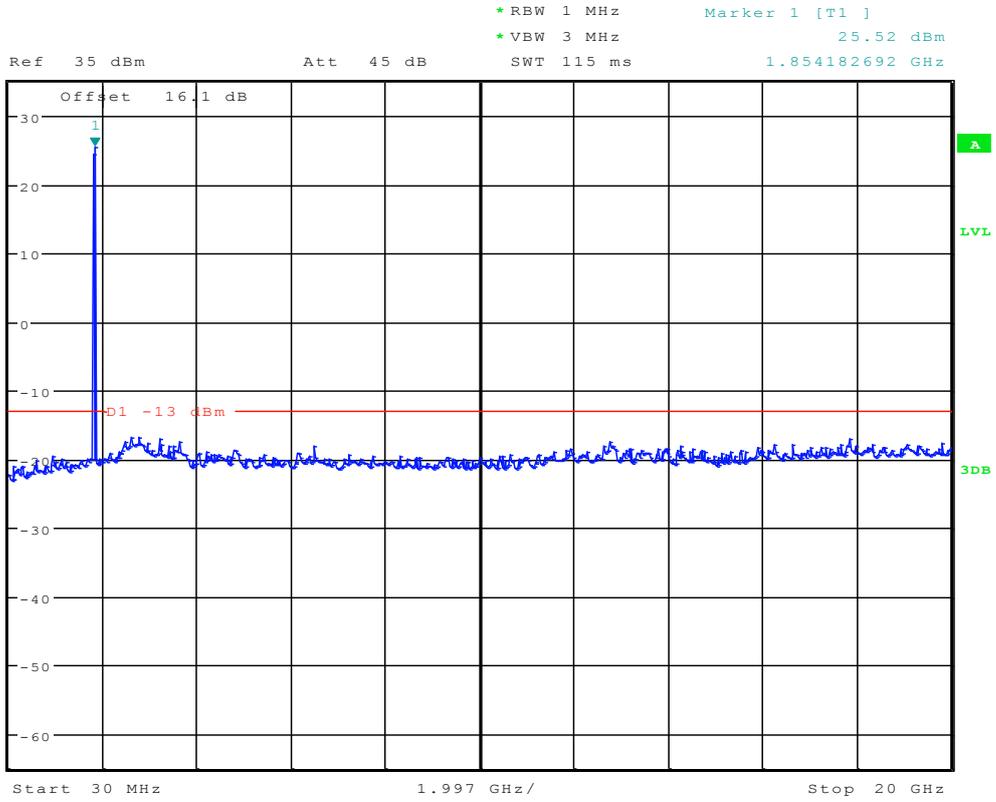




Channel 600





* RBW 1 kHz
* VBW 10 kHz
SWT 145 ms

Marker 1 [T1]
-38.67 dBm
9.000000000 kHz

Ref 35 dBm Att 45 dB

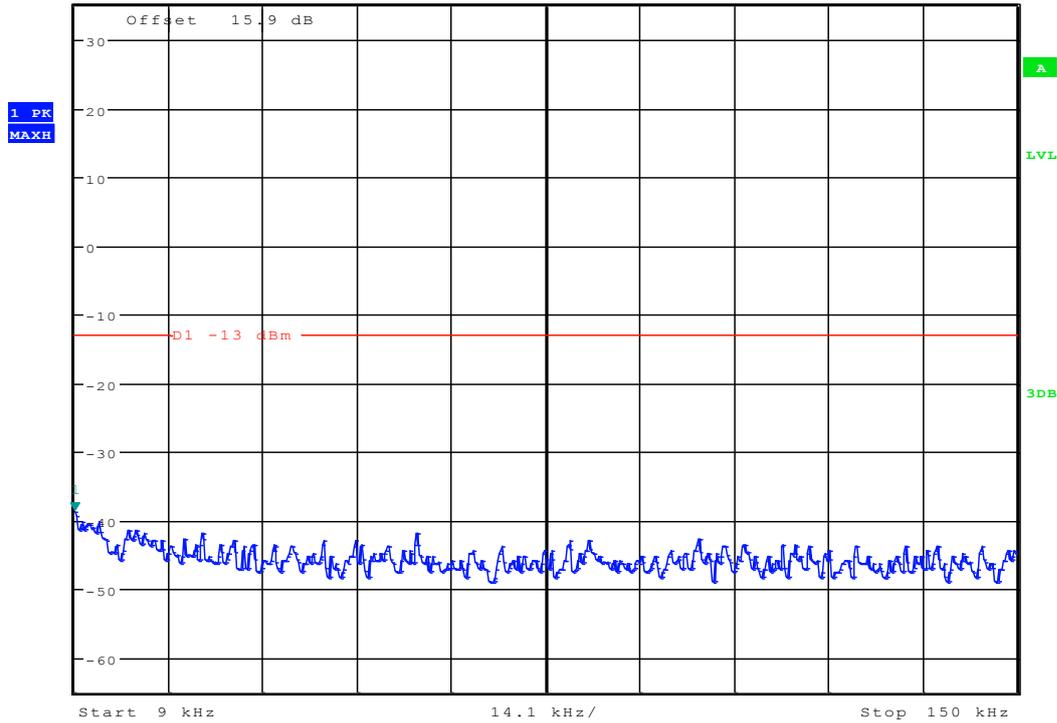

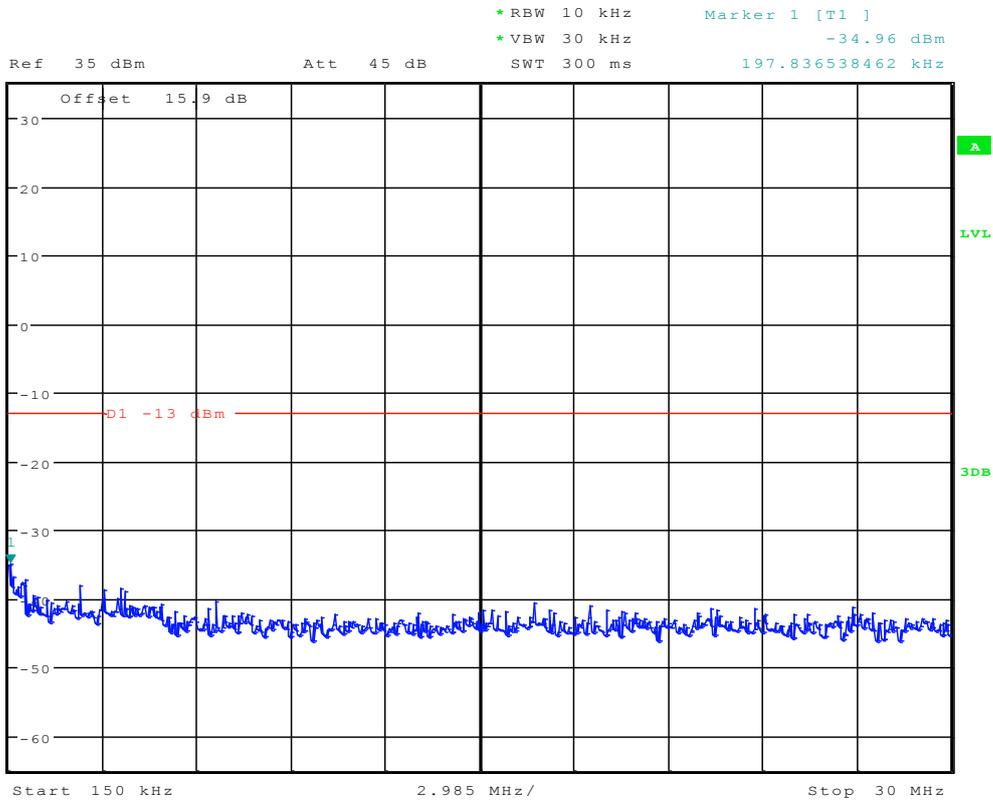

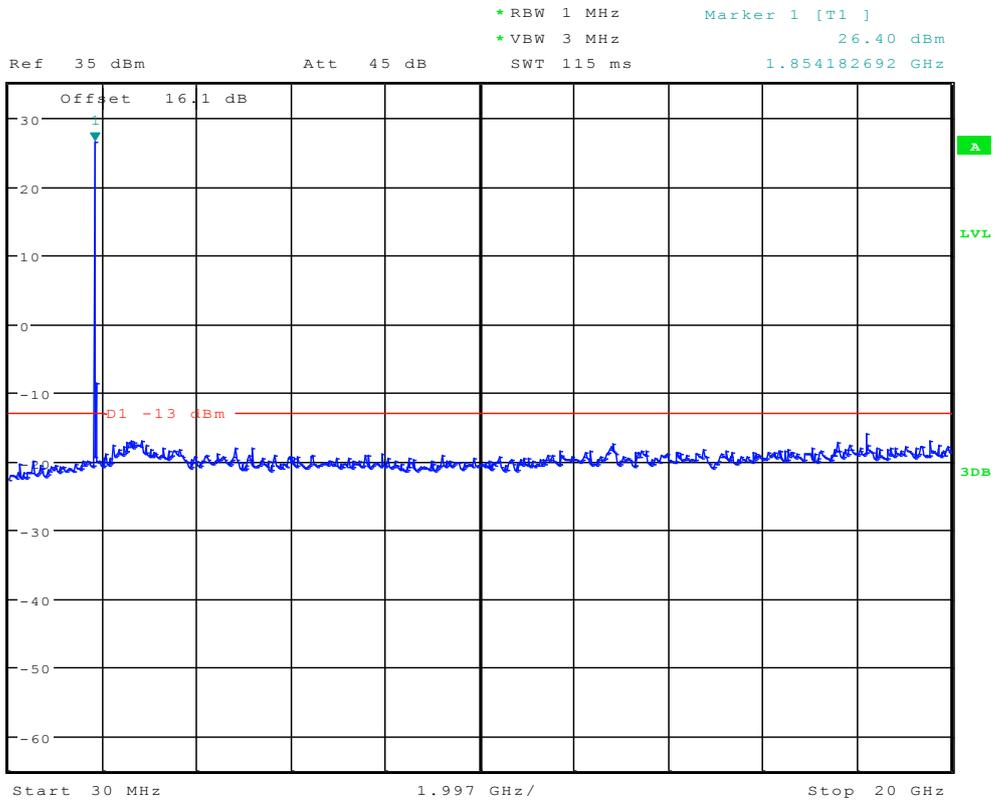




Channel 1175





*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -38.19 dBm
Ref 35 dBm Att 45 dB SWT 145 ms 9.000000000 kHz

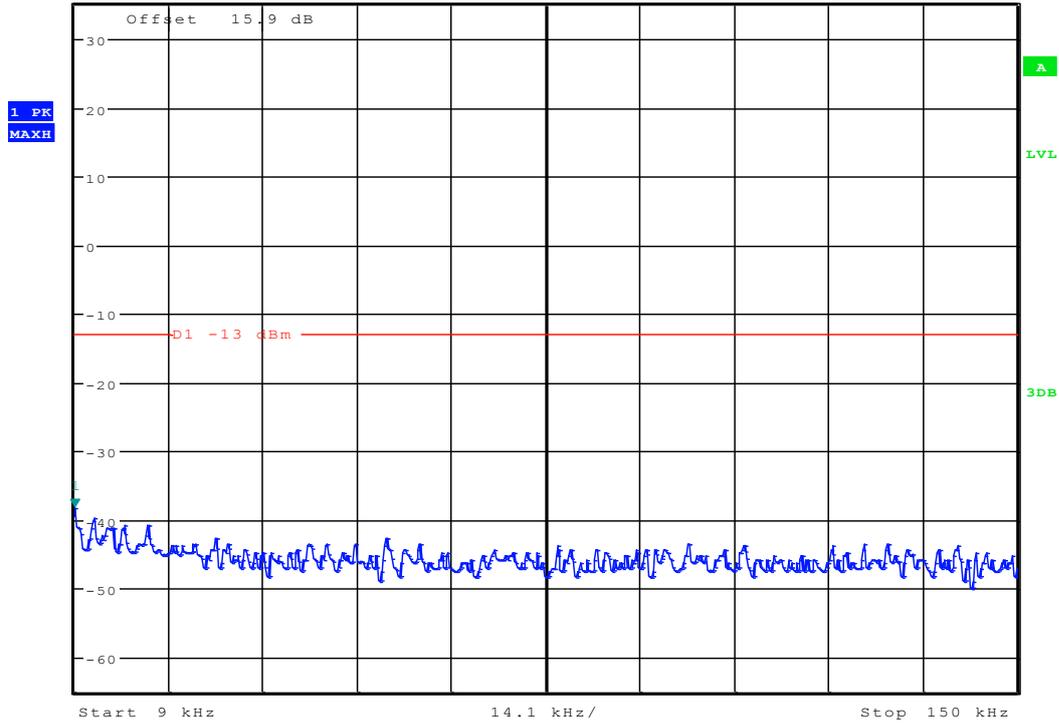



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -33.70 dBm
SWT 300 ms 197.836538462 kHz

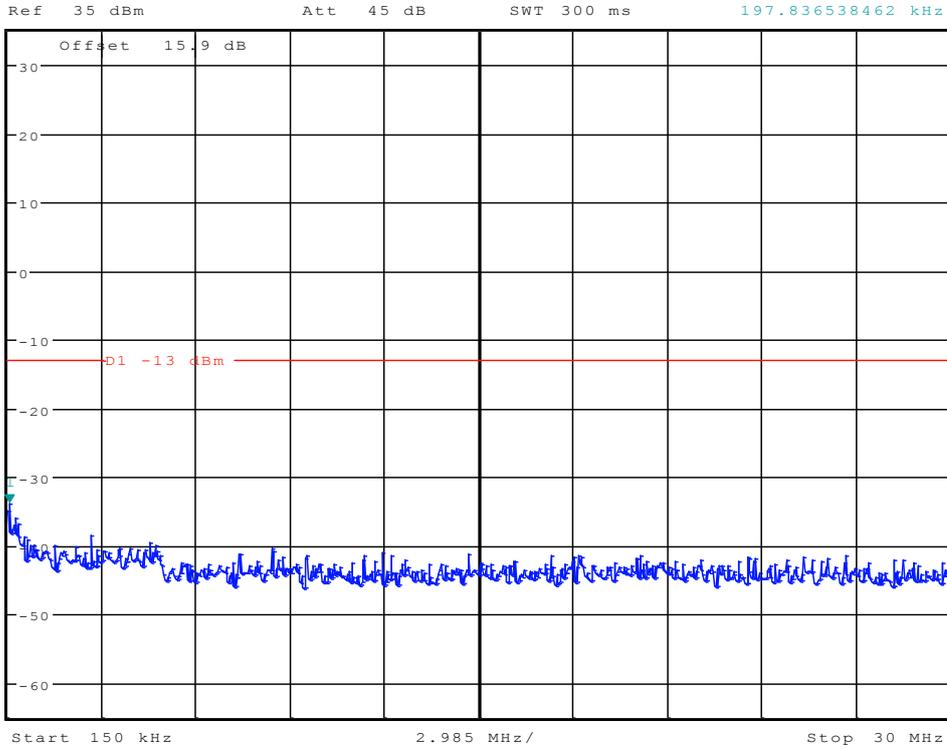

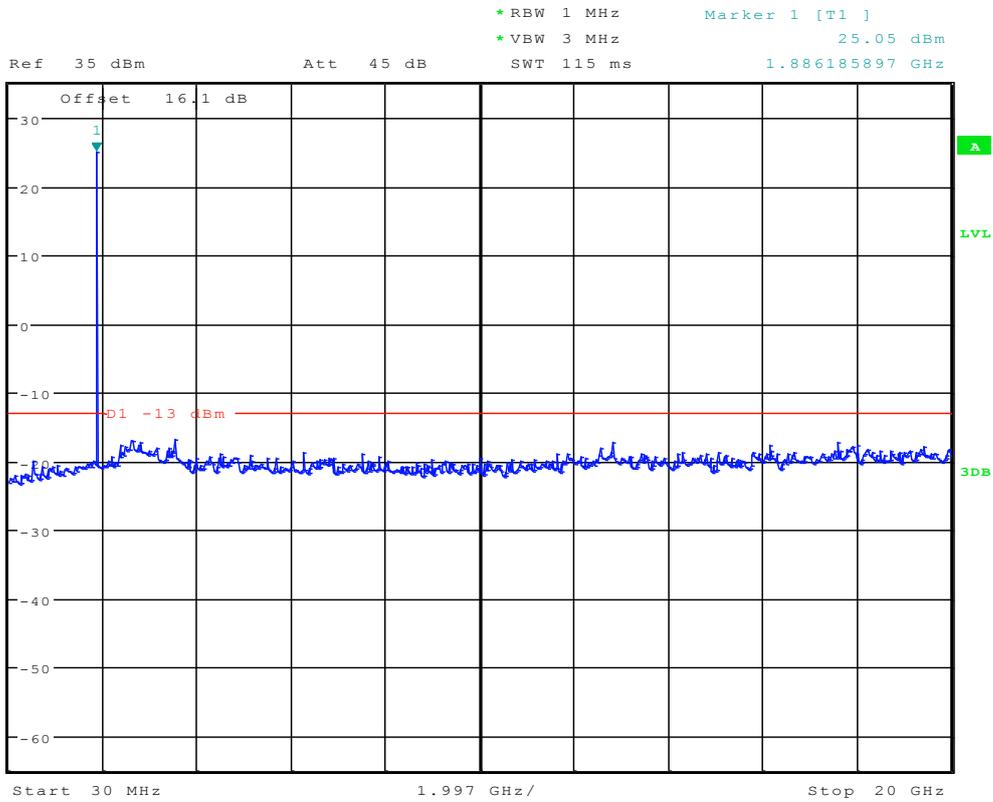




Modulation:8PSK Channel 25





*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -38.38 dBm
Ref 35 dBm Att 45 dB SWT 145 ms 9.225961538 kHz

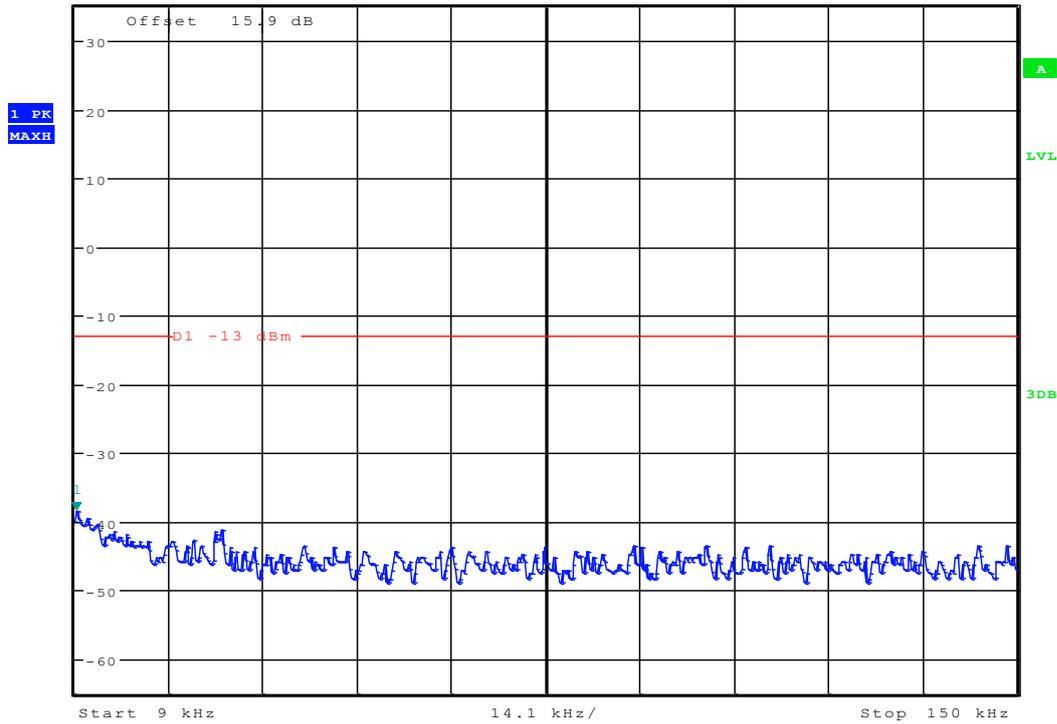



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -34.76 dBm
Ref 35 dBm Att 45 dB SWT 300 ms 150.000000000 kHz

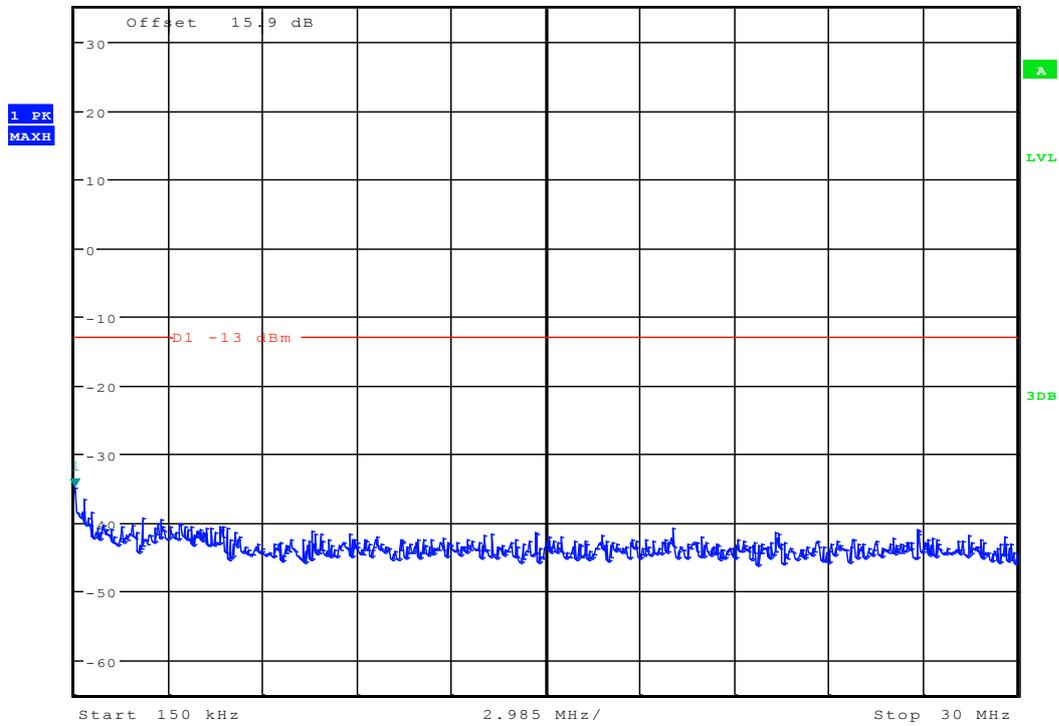

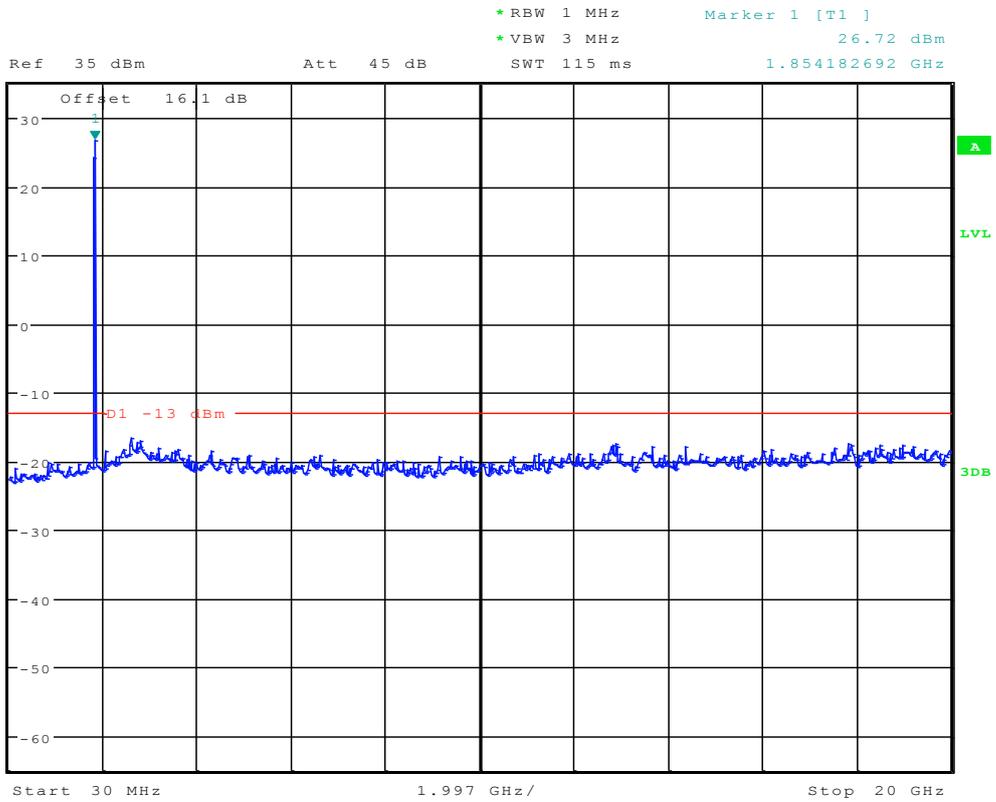




Channel 600




*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -39.08 dBm
SWT 145 ms 13.519230769 kHz


Ref 35 dBm Att 45 dB

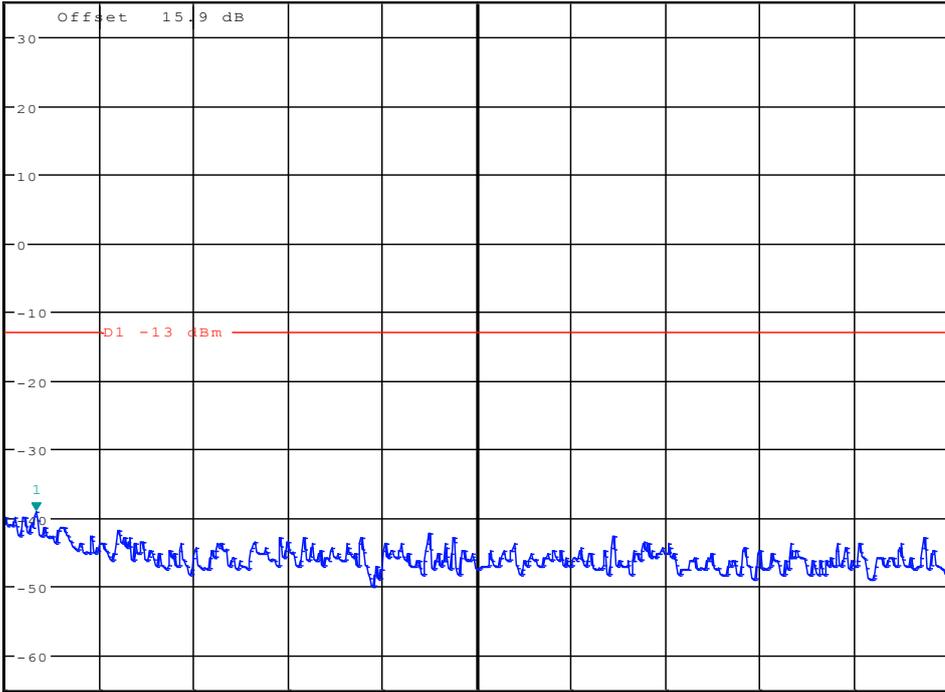



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -33.43 dBm
Ref 35 dBm Att 45 dB SWT 300 ms 197.836538462 kHz

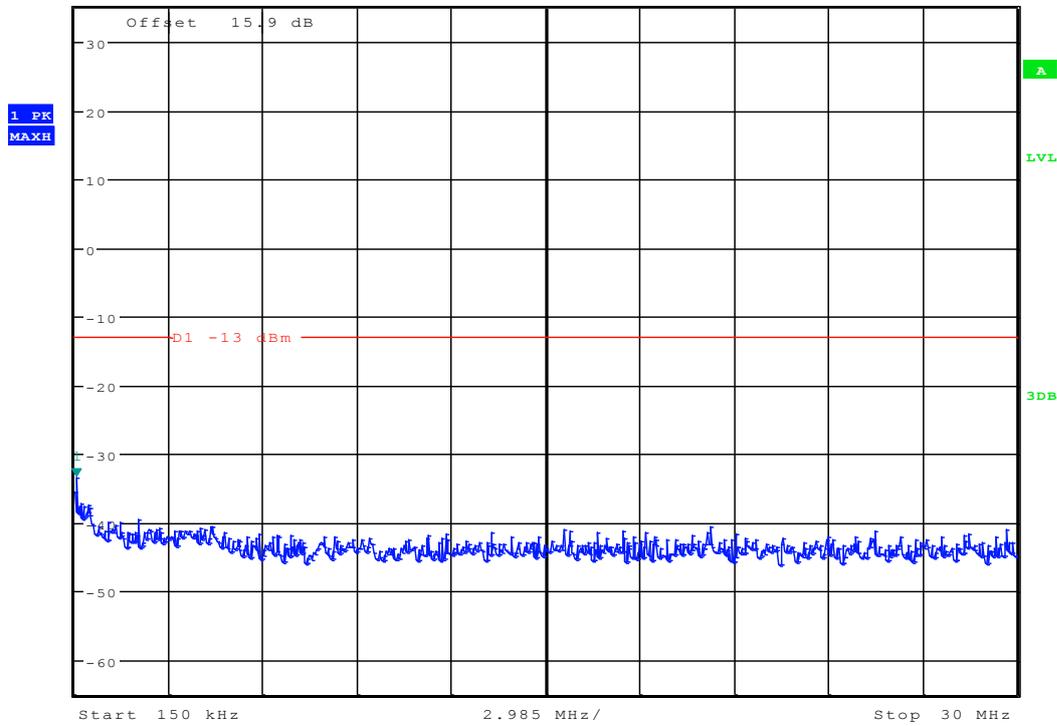

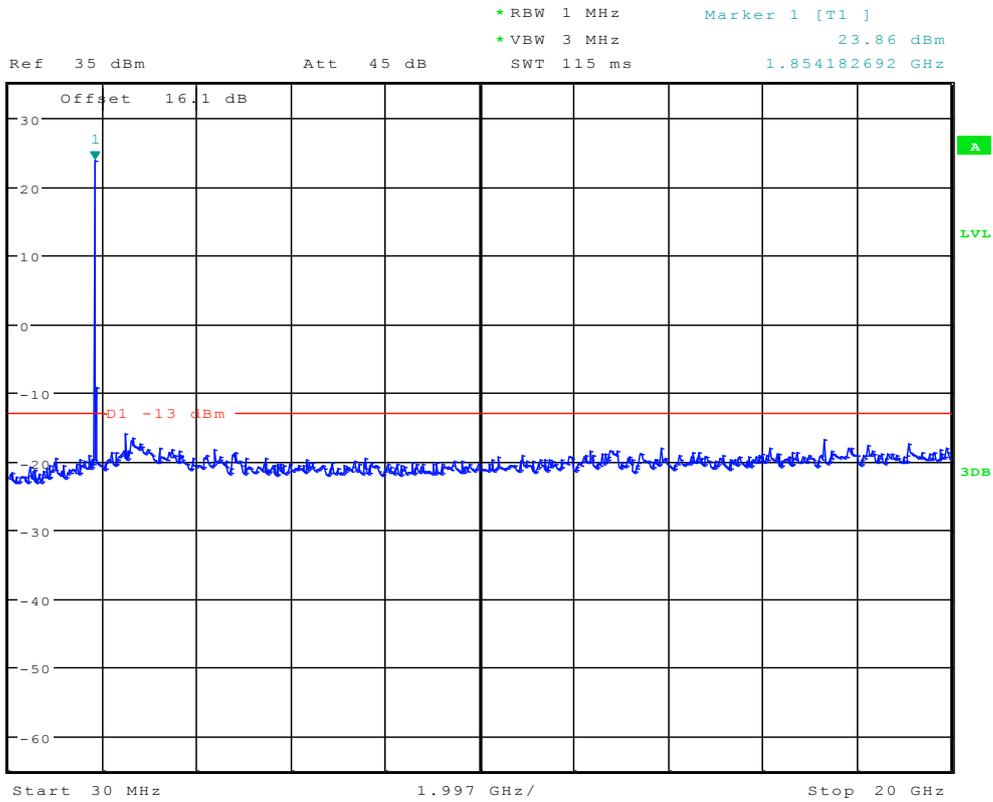




Channel 1175





*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -35.76 dBm
SWT 145 ms 9.000000000 kHz

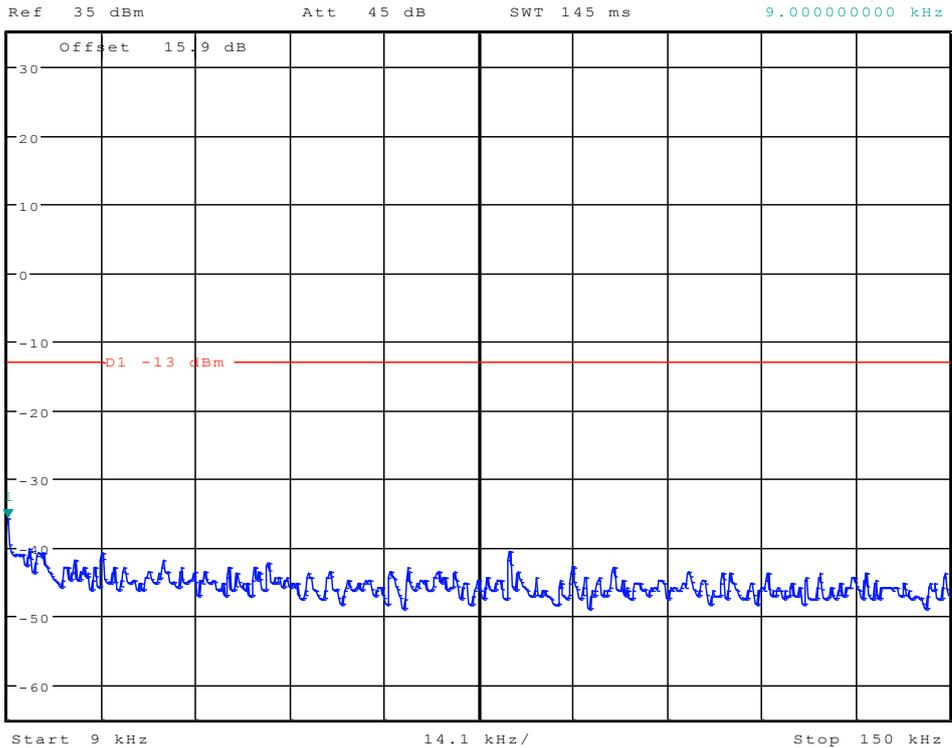



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -32.13 dBm
Ref 35 dBm Att 45 dB SWT 300 ms 197.836538462 kHz

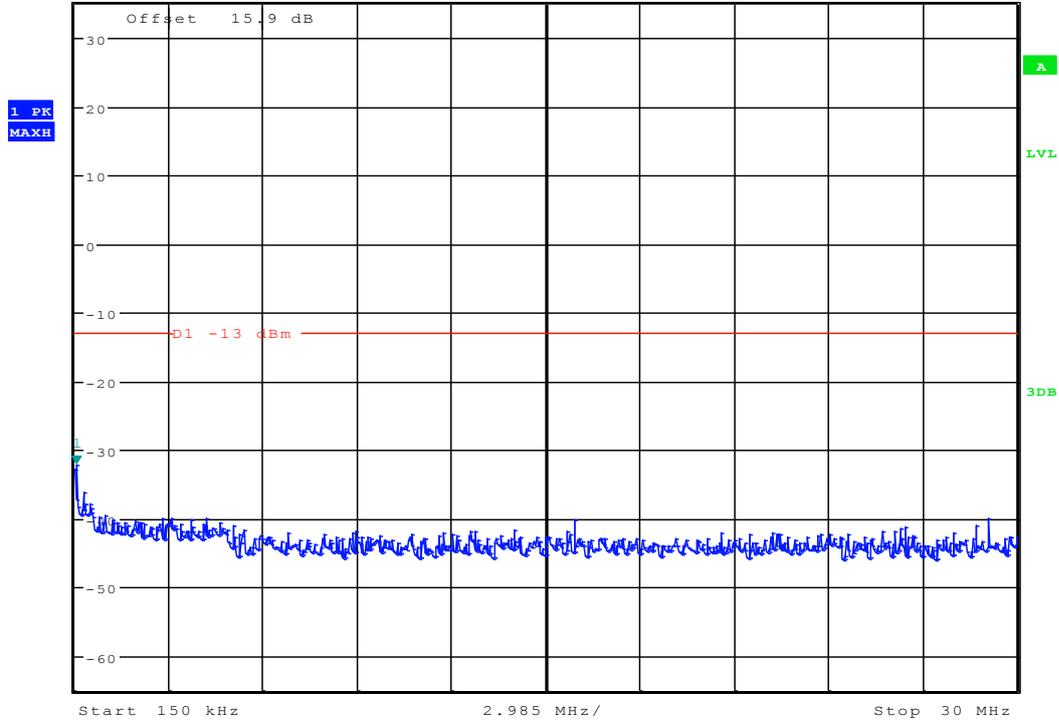

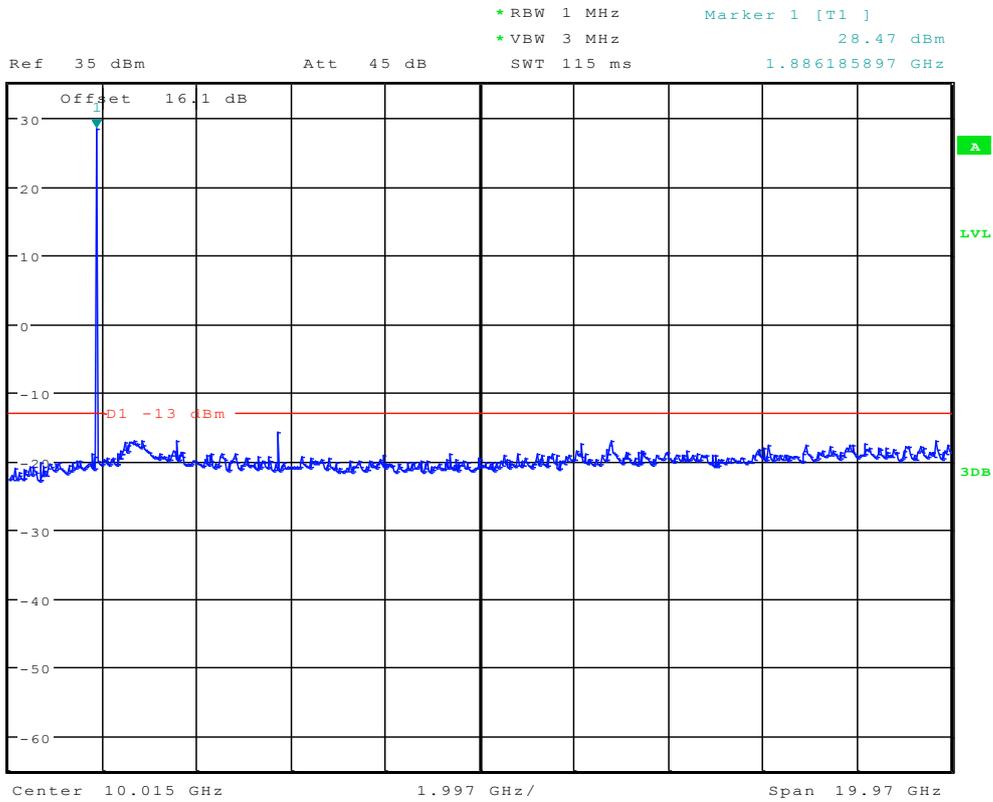

The END




Appendix F

Field Strength of Spurious Radiation


According to FCC Part 2.1053& Part 24.238

CDMA 1900


Traffic Mode (9kHz-30MHz)

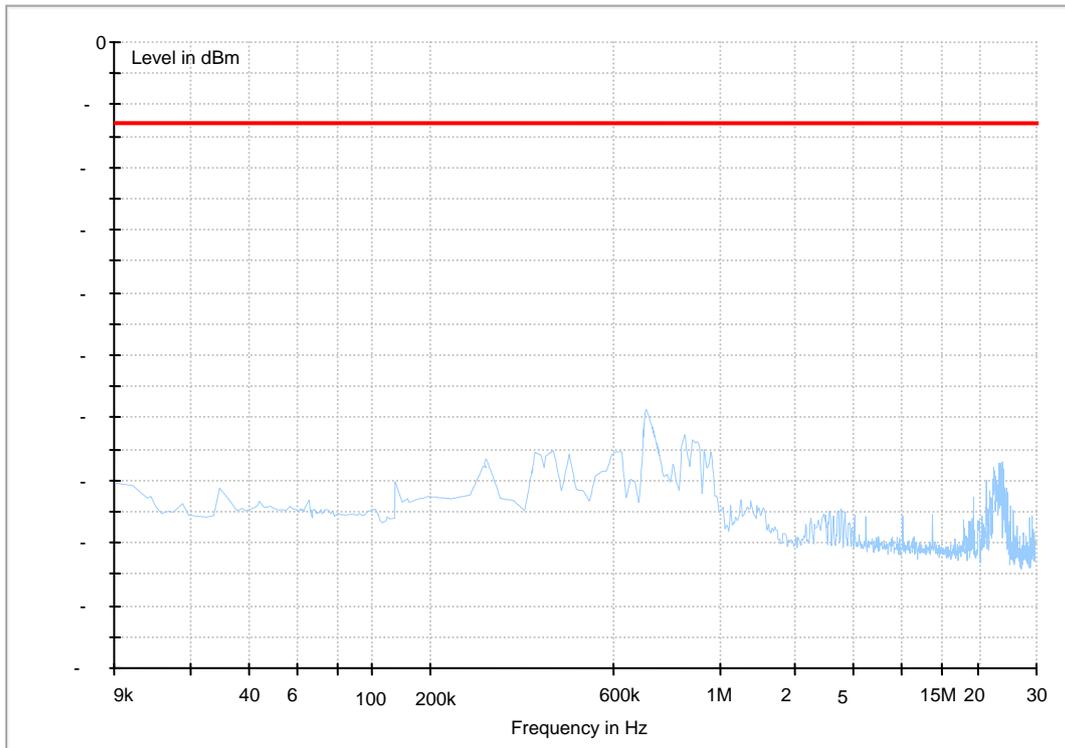


Traffic Mode (30MHz-3GHz)

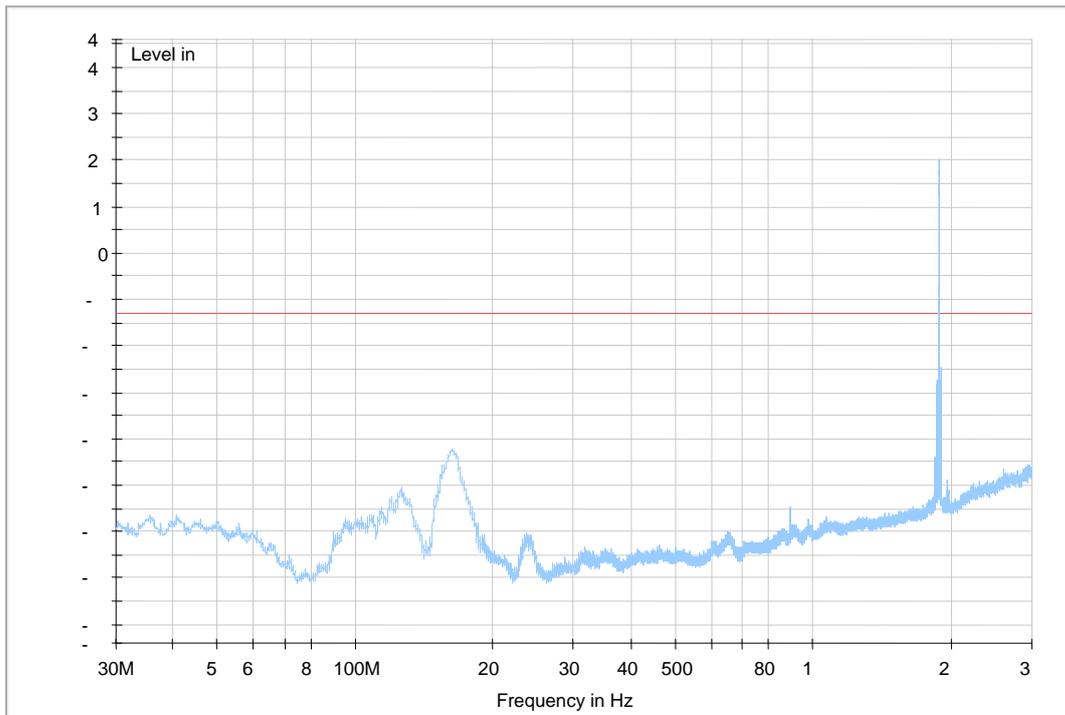

Traffic Mode (3GHz-18GHz)

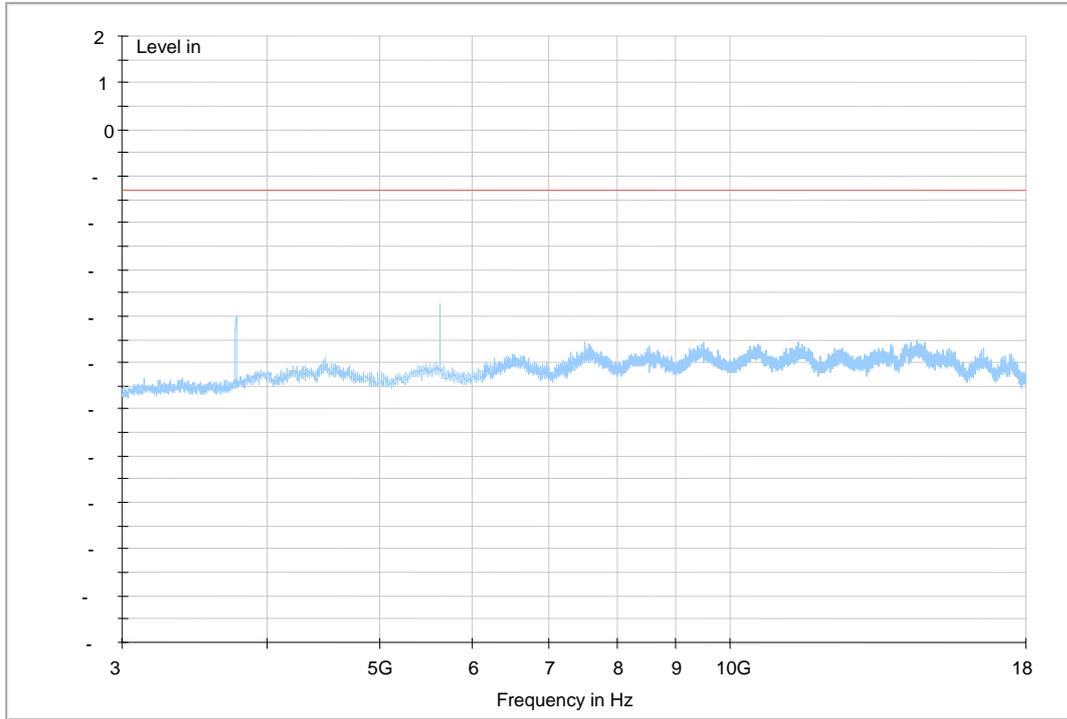


Traffic Mode (18GHz-26.5GHz)

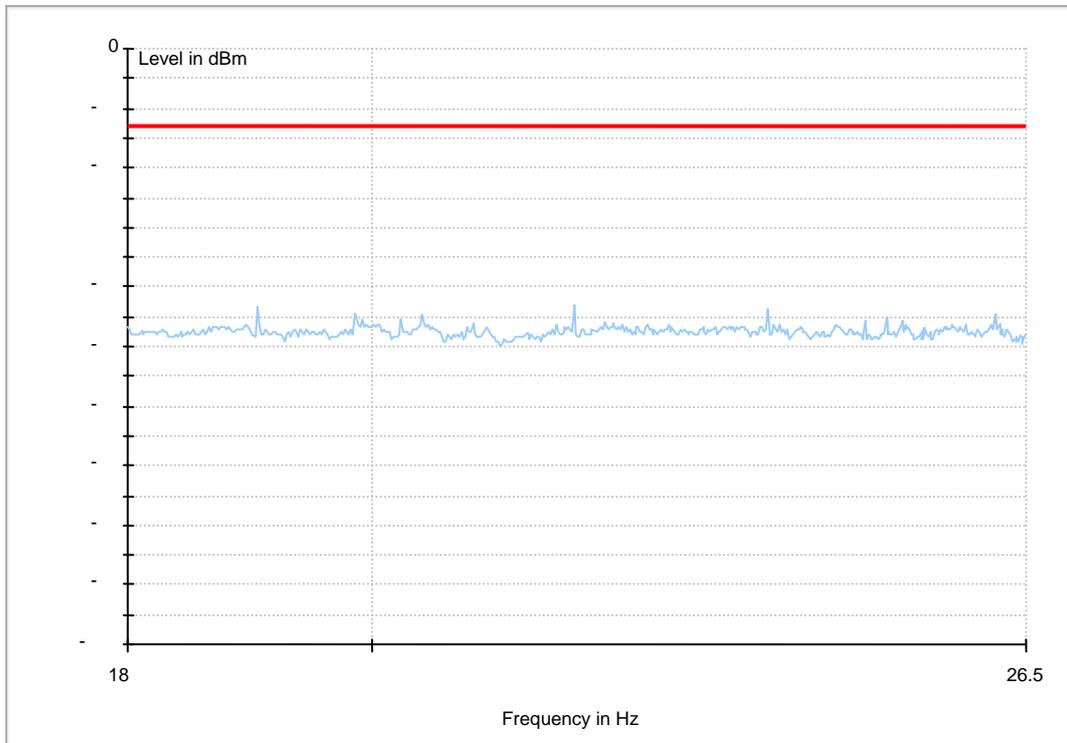


EVDO 1900 R.0


Traffic Mode (9kHz-30MHz)

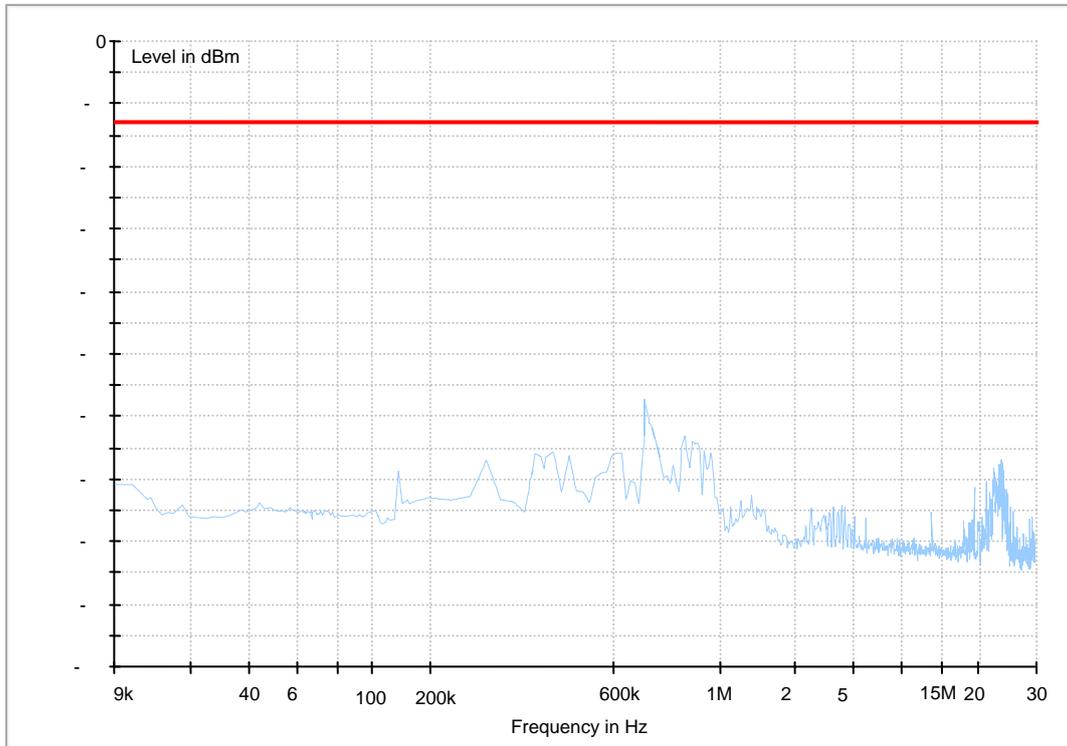


Traffic Mode (30MHz-3GHz)

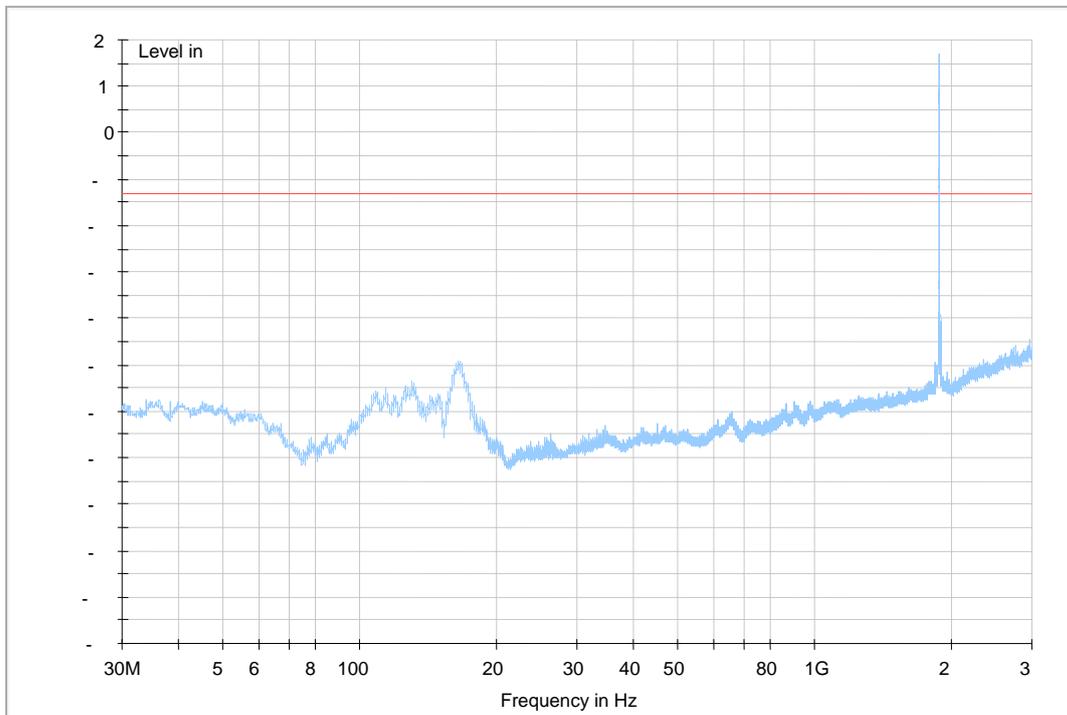

Traffic Mode (3GHz-18GHz)

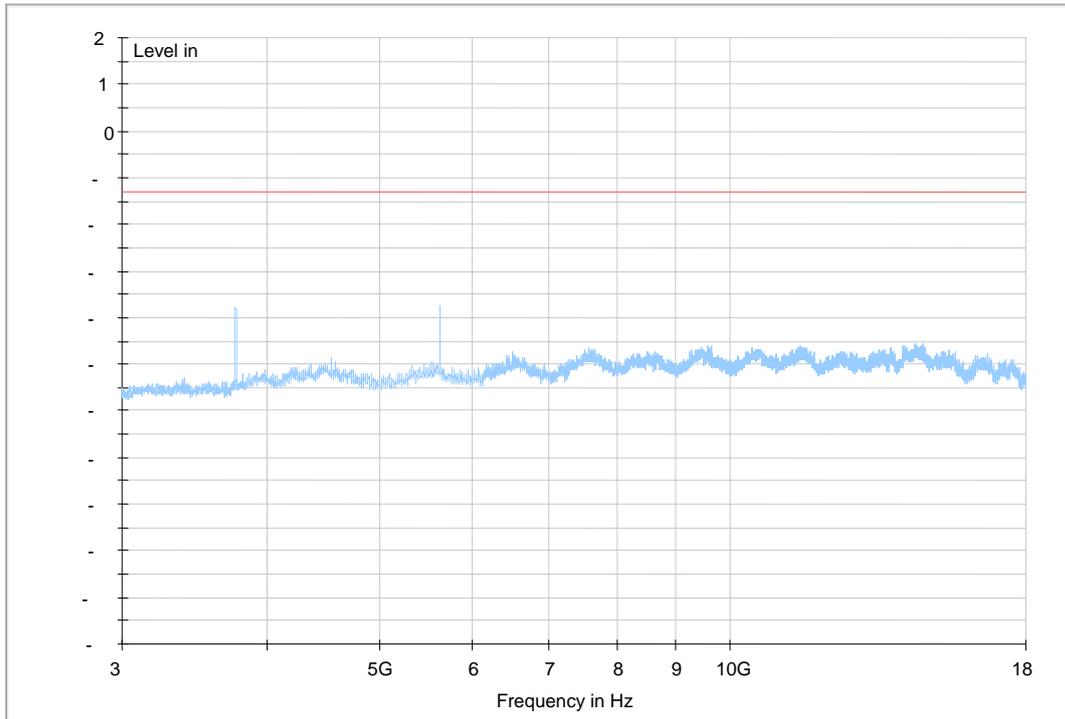


Traffic Mode (18GHz-26.5GHz)

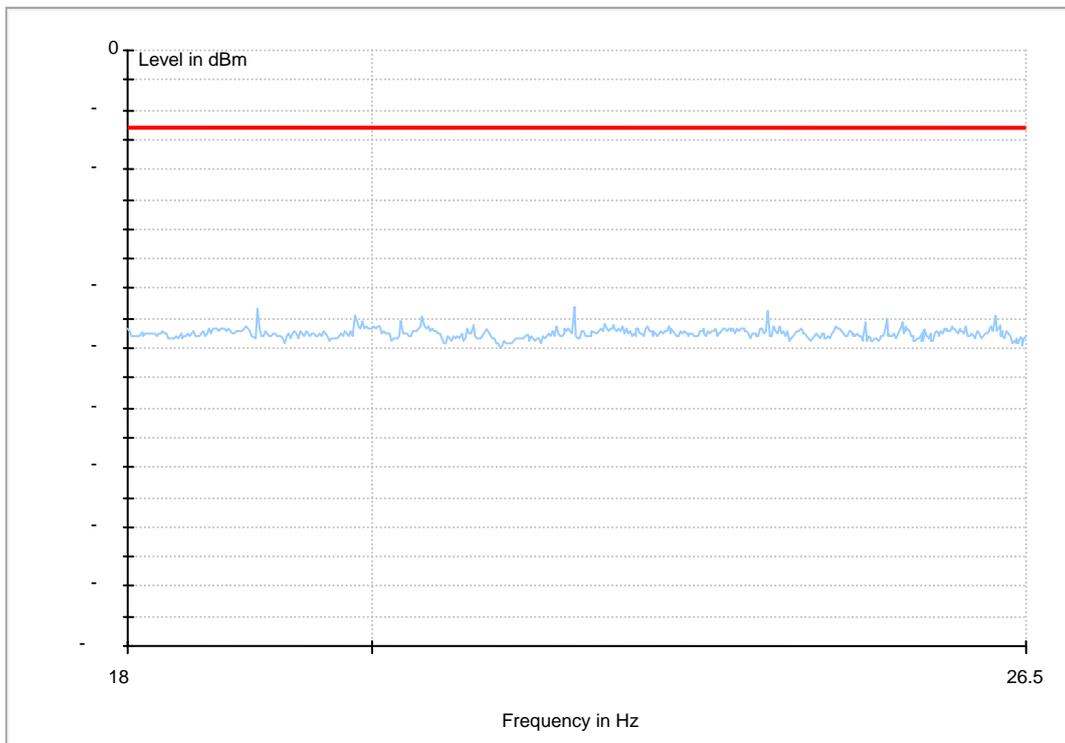


EVDO 1900 R.A


Traffic Mode (9kHz-30MHz)

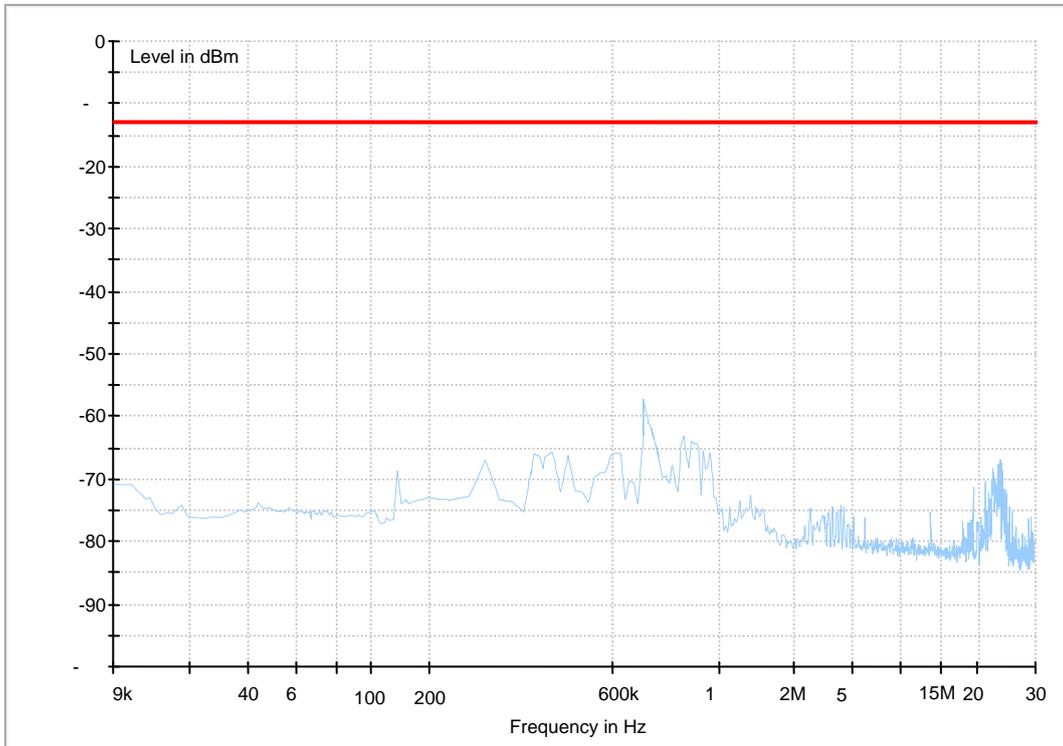


Traffic Mode (30MHz-3GHz)

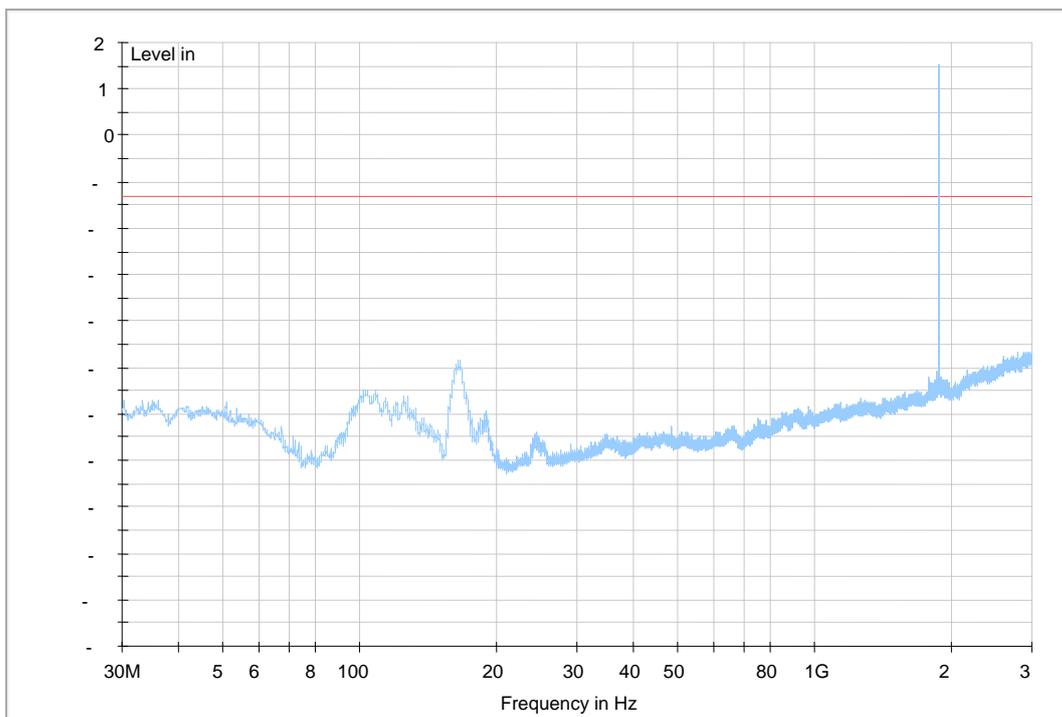

Traffic Mode (3GHz-18GHz)

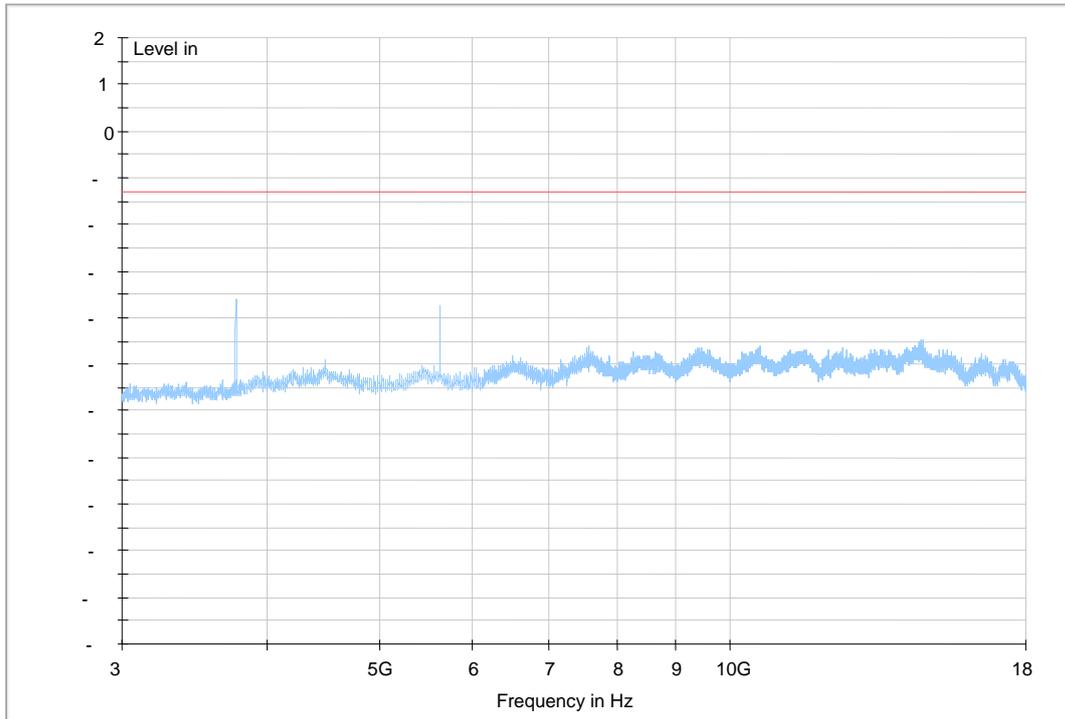

Traffic Mode (18GHz-26.5GHz)

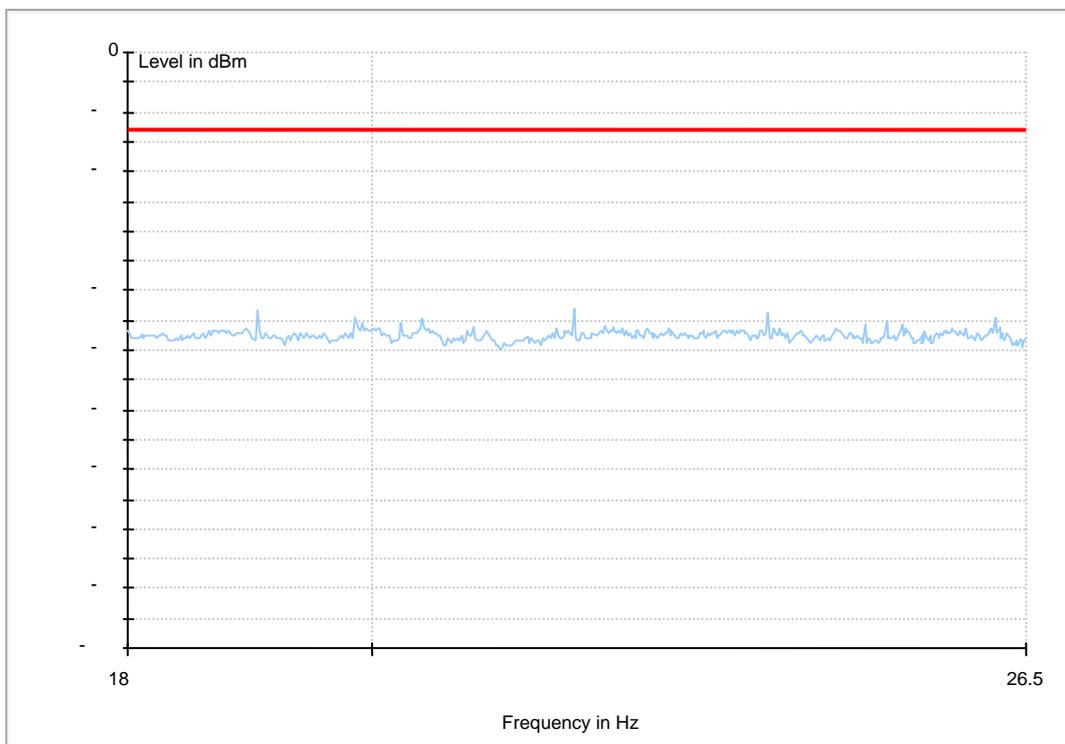

The END



Appendix G

Frequency Stability

According to FCC Part 2.1055& Part 24.235



Frequency Error vs. Temperature:

NOTE: All relevant operation modes have been tested, and the worst case data is included in this report.

Test Mode	RF Ch.	Volt.	Temp.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	VN	-30 °C	13	0.0069	---	±2.5	Pass
			-20 °C	-9	-0.0048	---	±2.5	Pass
			-10 °C	-18	-0.0096	---	±2.5	Pass
			0 °C	18	0.0096	---	±2.5	Pass
			10 °C	-17	-0.0090	---	±2.5	Pass
			20 °C	-15	-0.0080	---	±2.5	Pass
			30 °C	20	0.0106	---	±2.5	Pass
			40 °C	-17	-0.0090	---	±2.5	Pass
			50 °C	-11	-0.0059	---	±2.5	Pass
TM 3	M	VN	-30 °C	12	0.0064	---	±2.5	Pass
			-20 °C	15	0.0080	---	±2.5	Pass
			-10 °C	-9	-0.0048	---	±2.5	Pass
			0 °C	-15	-0.0080	---	±2.5	Pass
			10 °C	19	0.0101	---	±2.5	Pass
			20 °C	-9	-0.0048	---	±2.5	Pass
			30 °C	12	0.0064	---	±2.5	Pass
			40 °C	-12	-0.0064	---	±2.5	Pass
			50 °C	-11	-0.0059	---	±2.5	Pass
Subtype 0	M	VN	-30 °C	11	0.0059	---	±2.5	Pass
			-20 °C	-7	-0.0037	---	±2.5	Pass
			-10 °C	-11	-0.0059	---	±2.5	Pass
			0 °C	18	0.0096	---	±2.5	Pass
			10 °C	19	0.0101	---	±2.5	Pass
			20 °C	-13	-0.0069	---	±2.5	Pass
			30 °C	-8	-0.0043	---	±2.5	Pass
			40 °C	10	0.0053	---	±2.5	Pass
			50 °C	-13	-0.0069	---	±2.5	Pass
Subtype 2	M	VN	-30 °C	11	0.0059	---	±2.5	Pass
			-20 °C	13	0.0069	---	±2.5	Pass
			-10 °C	-12	-0.0064	---	±2.5	Pass
			0 °C	-9	-0.0048	---	±2.5	Pass
			10 °C	17	0.0090	---	±2.5	Pass
			20 °C	21	0.0112	---	±2.5	Pass
			30 °C	-14	-0.0074	---	±2.5	Pass
			40 °C	-4	-0.0021	---	±2.5	Pass
			50 °C	16	0.0085	---	±2.5	Pass



Frequency Error vs. Voltage:

Test Mode	RF Ch.	Temp.	Volt.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	TN	VL	-18	-0.0096	---	±2.5	Pass
			VN	-17	-0.0090	---	±2.5	Pass
			VH	19	0.0101	---	±2.5	Pass
TM 3	M	TN	VL	-14	-0.0074	---	±2.5	Pass
			VN	-11	-0.0059	---	±2.5	Pass
			VH	17	0.0090	---	±2.5	Pass
Subtype 0	M	TN	VL	-11	-0.0059	---	±2.5	Pass
			VN	12	0.0064	---	±2.5	Pass
			VH	-14	-0.0074	---	±2.5	Pass
Subtype 2	M	TN	VL	15	0.0080	---	±2.5	Pass
			VN	-18	-0.0096	---	±2.5	Pass
			VH	-15	-0.0080	---	±2.5	Pass

-----The END-----