



# ANSI C63.19

# TEST REPORT

<b>Product Name</b>	cdma2000 Digital Mobile Phone
<b>Model</b>	HUAWEI M866, M866
<b>FCC ID</b>	QISM866
<b>Client</b>	Huawei Technologies Co., Ltd.

**TA Technology (Shanghai) Co., Ltd.**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 2 of 168

**GENERAL SUMMARY**

<b>Product Name</b>	cdma2000 Digital Mobile Phone	<b>Model</b>	HUAWEI M866, M866
<b>FCC ID</b>	QISM866	<b>Report No.</b>	RHA1204-0013HAC02R3
<b>Client</b>	Huawei Technologies Co., Ltd.		
<b>Manufacturer</b>	Huawei Technologies Co., Ltd.		
<b>Reference Standard(s)</b>	<b>ANSI C63.19-2007:</b> American National Standard Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.		
<b>Conclusion</b>	<p>This portable wireless equipment has been measured in all cases requested by the relevant standards.</p> <p>General Judgment: T3</p> <div style="text-align: right;">               (Stamp)  <b>Date of issue: May 30<sup>th</sup>, 2012</b> </div>		
<b>Comment</b>	The test result only responds to the measured sample.		

Approved by 初伟中  
Director

Revised by 凌敏宝  
HAC Manager

Performed by 张先金  
HAC Engineer

## TABLE OF CONTENT

1. General Information .....	4
1.1. Notes of the Test Report.....	4
1.2. Testing Laboratory .....	4
1.3. Applicant Information .....	5
1.4. Manufacturer Information.....	5
1.5. Information of EUT.....	6
1.6. The Ambient Conditions during Test.....	8
1.7. T-Coil signal quality categories of each tested Mode.....	8
1.8. Test Date .....	8
2. Test Information .....	9
2.1. Operational Conditions during Test.....	9
2.1.1. General Description of Test Procedures.....	9
2.1.2. CDMA Test Configuration.....	9
2.2. T-Coil Measurements System Configuration .....	10
2.2.1. T-coil Measurement Set-up.....	10
2.2.2. AM1D Probe .....	12
2.2.3. Audio Magnetic Measurement Instrument (AMMI).....	13
2.2.4. Helmholtz Calibration Coil (AMCC).....	14
2.2.5. Test Arch Phantom & Phone Positioner .....	14
2.3. T-Coil measurement points and reference plane .....	16
2.4. T-Coil Test Procedures.....	17
3. T-Coil Performance Requirements.....	18
3.1.1. T-Coil coupling field intensity .....	18
3.1.2. Frequency response .....	18
3.1.3. Signal quality .....	19
4. Summary Test Results .....	20
4.1. CDMA Cellular (Initial Model: HUAWEI H866C, H866C) .....	20
4.2. CDMA PCS (Initial Model: HUAWEI H866C, H866C) .....	24
4.3. CDMA AWS (Variant Model: HUAWEI M866, M866) .....	28
5. 300MHz to 3GHz Measurement Uncertainty.....	32
6. Main Test Instruments .....	34
ANNEX A: Test Layout .....	35
ANNEX B: Graph Results.....	36
ANNEX C: Probe Calibration Certificate .....	156
ANNEX D: DAE4 Calibration Certificate.....	159
ANNEX E: The EUT Appearances and Test Configuration.....	164
ANNEX F: Product Change Description.....	167

## 1. General Information

### 1.1. Notes of the Test Report

**TA Technology (Shanghai) Co., Ltd.** guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

**TA Technology (Shanghai) Co., Ltd.** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

If the electrical report is inconsistent with the printed one, it should be subject to the latter.

### 1.2. Testing Laboratory

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Yang Weizhong  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [yangweizhong@ta-shanghai.com](mailto:yangweizhong@ta-shanghai.com)

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 5 of 168

---

### 1.3. Applicant Information

Company: Huawei Technologies Co., Ltd.  
Address: Bantian, Longgang District  
City: Shenzhen  
Postal Code: 518129  
Country: P.R. China

### 1.4. Manufacturer Information

Company: Huawei Technologies Co., Ltd.  
Address: Bantian, Longgang District  
City: Shenzhen  
Postal Code: 518129  
Country: P.R. China

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 6 of 168

**1.5. Information of EUT**

**General Information**

Device Type:	Portable Device		
Product Name:	cdma2000 Digital Mobile Phone		
SN:	A0000033D0334C		
Hardware Version:	HC1C8655M		
Software Version:	M866V100R001C289B815		
Antenna Type:	Internal Antenna		
Device Operating Configurations:			
Supporting Mode(s):	CDMA Cellular/CDMA PCS/CDMA AWS; (tested)		
	WIFI/Bluetooth; (untested)		
Test Modulation:	QPSK		
Operating Frequency Range(s):	Mode	Tx (MHz)	Rx (MHz)
	CDMA Cellular	824.7 ~ 848.31	869.7 ~ 893.31
	CDMA PCS	1851.25 ~ 1908.75	1931.25 ~ 1988.75
	CDMA AWS	1711.25 ~ 1752.5	2111.25 ~ 2152.5
Test Channel:Middle	384	(CDMA Cellular)	(tested)
	600	(CDMA PCS)	(tested)
	450	(CDMA AWS)	(tested)
Power Class:	CDMA Cellular: Tested with Power Control All up bits		
	CDMA PCS: Tested with Power Control All up bits		
	CDMA AWS: Tested with Power Control All up bits		

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 7 of 168

---

### Auxiliary Equipment Details

#### AE1:Battery

Model: HB5K1H  
Manufacturer: Huawei Technologies Co., Ltd.  
S/N: UAIBC16X03002980

#### AE2:Battery

Model: HB5K1H  
Manufacturer: Huawei Technologies Co., Ltd.  
S/N: UNDC306X03000327

#### AE3:Battery

Model: HB5K1H  
Manufacturer: Huawei Technologies Co., Ltd.  
S/N: WHCC115691073294

#### AE4:Battery

Model: HB5K1H  
Manufacturer: Huawei Technologies Co., Ltd.  
S/N: MHCBB066I4437882

Equipment Under Test (EUT) is a cdma2000 Digital Mobile Phone. The detail about Mobile phone and Lithium Battery is in chapter 1.5 in this report. The EUT has a CDMA antenna that is used for Tx/Rx, and the other is BT/WiFi antenna that is used for Tx/Rx. T-Coil is tested for CDMA Cellular, CDMA PCS and CDMA AWS.

The EUT has Personal Wireless Routers (hot spots) function and Proximity Sensor function. The proximity sensor is a sensor able to detect the presence of nearby objects without any physical contact. When it is activated, it will not influence the transmit power.

HUAWEI M866, M866 is a variant model of HUAWEI H866C, H866C. HAC values duplicated from HUAWEI H866C, H866C for HUAWEI M866, M866, the report number of HUAWEI H866C, H866C is RHA1205-0024HAC02R1. HUAWEI M866, M866 increased the test of CDMA AWS on the basis of HUAWEI H866C, H866C in this report. The detailed differences between HUAWEI M866, M866 and HUAWEI H866C, H866C please refer to the ANNEX F.

The sample under test was selected by the Client.  
Components list please refer to documents of the manufacturer.

# TA Technology (Shanghai) Co., Ltd. Test Report

Air-Interface	Band (MHz)	Type	C63.1 9/ tested	Simultaneous Transmissions Note: Not to be tested	Concurrent single transmission	Reduced power 20.19(c)(1)	Voice Over Digital Transport (Data)
CDMA	800	VO	Yes	Yes BT , Wifi	Yes:EVDO.0/A, Wifi,BT Not rated	NA	NA
	1700	VO	Yes				
	1900	VO	Yes				
	EVDO.0/A	DT	NA	NA	Yes	NA	Yes
Wifi	2400	DT	NA	Yes CDMA,BT	NA	NA	Yes
Bluetooth (BT)	2400	DT	NA	Yes CDMA,Wifi	NA	NA	NA

VO Voice CMRS/PSTN Service only  
V/D Voice CMRS/PSTN and Data Service  
DT Digital Transport

\*HAC Rating was based on concurrent voice and data modes, Non current mode was found to represent worst case rating for both M and T rating

## 1.6. The Ambient Conditions during Test

Temperature	Min. = 18°C, Max. = 28 °C
Relative humidity	Min. = 0%, Max. = 80%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

## 1.7. T-Coil signal quality categories of each tested Mode

Band	Category
CDMA Cellular	T3
CDMA PCS	T3
CDMA AWS	T4

## 1.8. Test Date

The test performed from May 9, 2012 to May 10, 2012.

## **2. Test Information**

### **2.1. Operational Conditions during Test**

#### **2.1.1. General Description of Test Procedures**

The phone was tested in all normal configurations for the ear use. The EUT is mounted in the device holder equivalent as for classic dosimeter measurements. The acoustic output of the EUT shall coincide with the center point of the area formed by the dielectric wire and the middle bar of the arch's top frame. The EUT shall be moved vertically upwards until it touches the frame. The fine adjustment is possible by sliding the complete EUT holder on the yellow base plate of the Test Arch phantom. During the test, the EUT is selected on T-Coil mode, the LCD backlight is turned off and volume is adjusted to maximum level.

#### **2.1.2. CDMA Test Configuration**

A communication link is set up with a System Simulator (SS) by RF cable, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) are allocated to 384 respectively in the case of CDMA Cellular, allocated to 600 respectively in the case of CDMA PCS, allocated to 450 respectively in the case of CDMA AWS. T-Coil configurations is measured in RC1 with the EUT configured to transmit at full rate using Loopback Service Option SO3, at the same time the EUT shall be operated at its maximum RF output power setting.

## 2.2. T-Coil Measurements System Configuration

### 2.2.1. T-coil Measurement Set-up

These measurements are performed using the DASY5 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Stäubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor. The robot is a six-axis industrial robot performing precise movements. Cell controller systems contain the power supply, robot controller, teach pendant (Joystick) and remote control, and are used to drive the robot motors. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification; signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

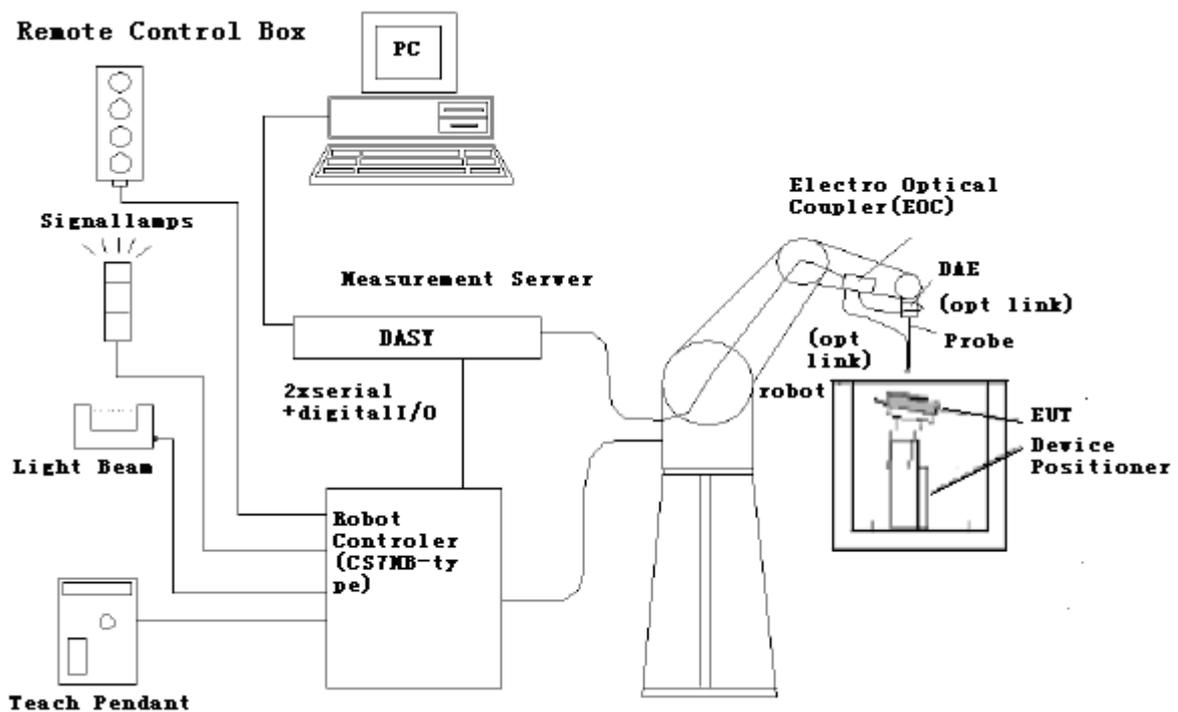


Figure 1 T-Coil Test Measurement Set-up

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

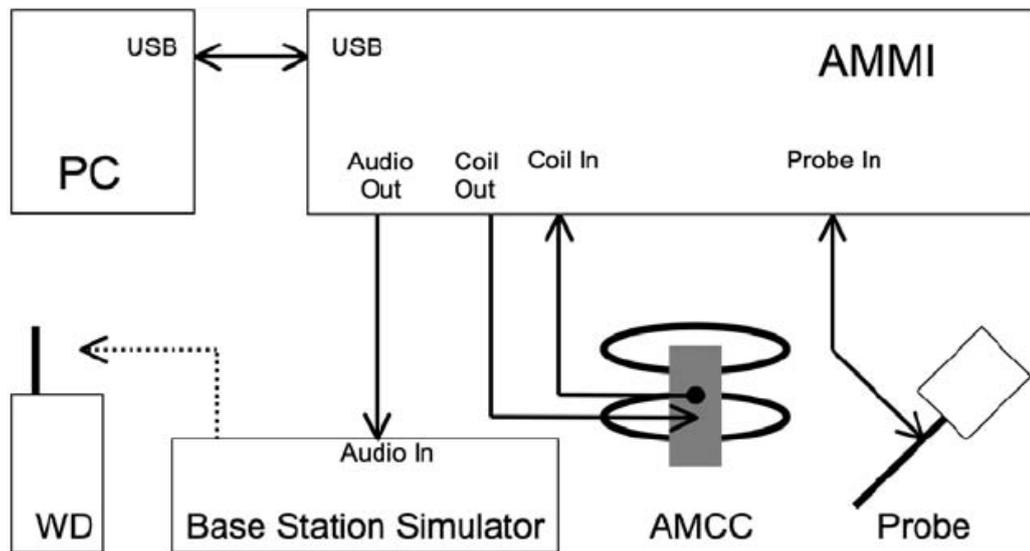
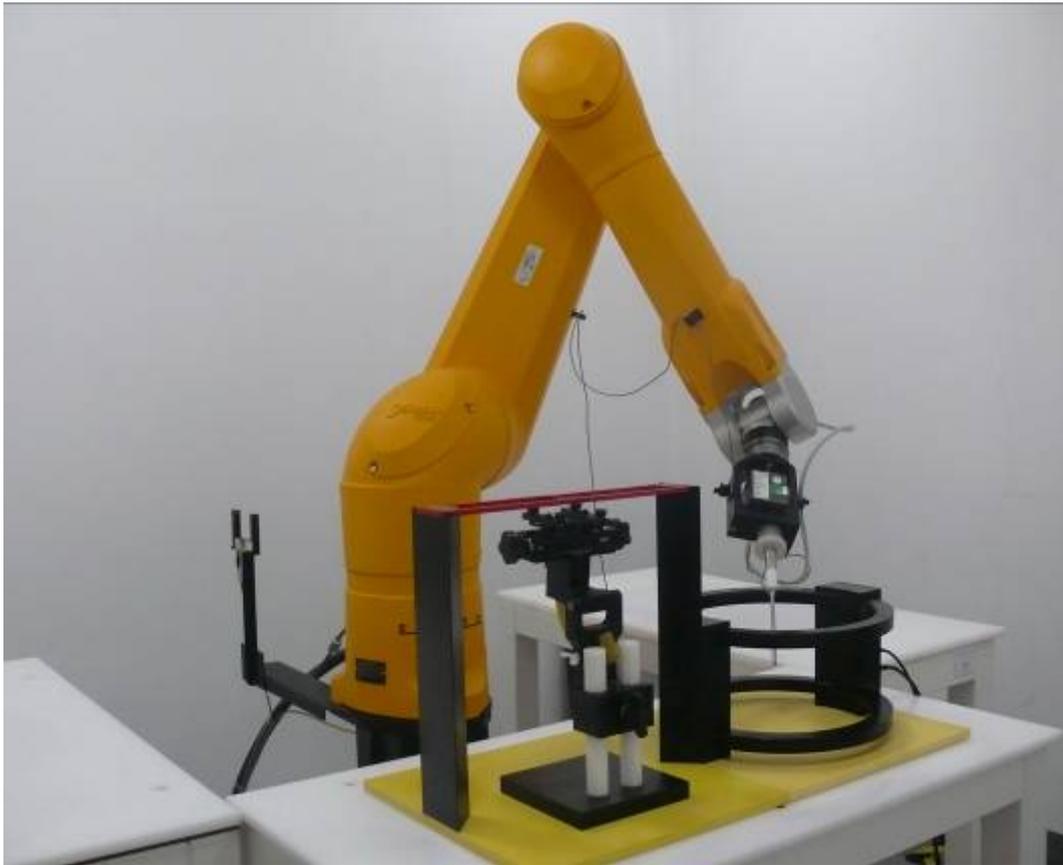


Figure 2 T-Coil Test Measurement Set-up

**2.2.2. AM1D Probe**

The AM1D probe is an active probe with a single sensor. It is fully RF-shielded and has a rounded tip 6mm in diameter incorporating a pickup coil with its center offset 3mm from the tip and the sides. The symmetric signal preamplifier in the probe is fed via the shielded symmetric output cable from the AMMI with a 48V “phantom” voltage supply. The 7-pin connector on the back in the axis of the probe does not carry any signals. It is mounted to the DAE for the correct orientation of the sensor. If the probe axis is tilted 54.7 degree from the vertical, the sensor is approximately vertical when the signal connector is at the underside of the probe (cable hanging downwards).

Specification

frequency range	0.1 - 20 kHz (RF sensitivity <-100 dB, fully RF shielded)
sensitivity	<-50 dB A/m @ 1 kHz
pre-amplifier	40 dB, symmetric
dimensions	tip diameter / length: 6 / 290 mm, sensor according to ANSI-C63.19



**Figure 3 AM1D Probe**

**2.2.3. Audio Magnetic Measurement Instrument (AMMI)**

The Audio Magnetic Measuring Instrument (AMMI) is a desktop 19-inch unit containing a sampling unit, a waveform generator for test and calibration signals, and a USB interface.



**Figure 4 AMMI front panel**

Port description:

<b>Audio Out</b>	BNC, audio signal to the base station simulator, for >500Ohm load
<b>Coil Out</b>	BNC, test and calibration signal to the AMCC (top connector), for 50Ohm load
<b>Coil In</b>	XLR, monitor signal from the AMCC BNO connector, 600 Ohm
<b>Probe In</b>	XLR, probe signal and phantom supply to the probe Lemo connector

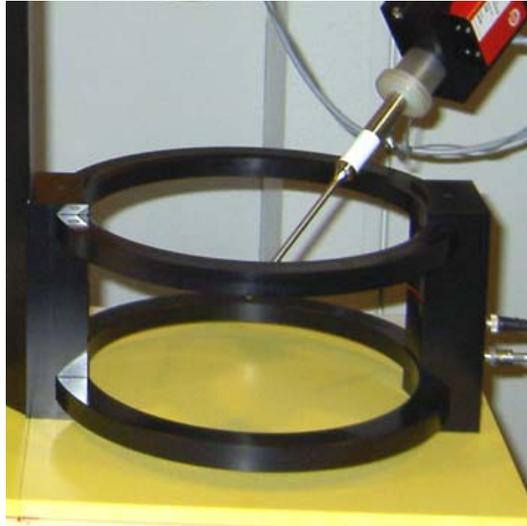


**Figure 5 AMMI rear side**

<b>Sampling rate</b>	48 kHz / 24 bit
<b>Dynamic range</b>	85 dB
<b>Test signal generation</b>	User selectable and predefined (vis PC)
<b>Calibration</b>	Auto-calibration / full system calibration using AMCC with monitor output
<b>Dimensions</b>	482 x 65 x 270 mm

**2.2.4. Helmholtz Calibration Coil (AMCC)**

The Audio Magnetic Calibration coil is a Helmholtz Coil designed for calibration of the AM1D probe. The two horizontal coils generate a homogeneous magnetic field in the z direction. The DC input resistance is adjusted by a series resistor to approximately 50Ohm, and a shunt resistor of 10Ohm permits monitoring the current with a scale of 1:10



**Figure 6 AMCC**

Port description:

Signal	Connector	Resistance
Coil In	BNC	Typically 50Ohm
Coil Monitor	BNO	10Ohm ± 1% (100mV corresponding to 1 A/m)

Specification:

<b>Dimensions</b>	370 x 370 x 196 mm, according to ANSI-C63.19
-------------------	--

**2.2.5. Test Arch Phantom & Phone Positioner**

The Test Arch phantom should be positioned horizontally on a stable surface. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. It enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot (Dimensions: 370 x 370 x 370 mm).

The Device reference point is set for the EUT at 6.3 mm, the Grid reference point is on the upper surface at the origin of the coordinates, and the “user point \Height Check 0.5 mm” is 0.5mm above the center, allowing verification of the gap of 0.5mm while the probe is positioned there.

The Phone Positioner supports accurate and reliable positioning of any phone with effect on near field <math>\pm 0.5\text{ dB}</math>.



**Figure 7 T-coil Phantom & Device Holder**

### 2.3. T-Coil measurement points and reference plane

The following figure illustrates the three standard probe orientations. Position 1 is the axial orientation of the probe coil; orientation 2 and orientation 3 are radial orientations. The space between the measurement positions is not fixed. It is recommended that a scan of the EUT be done for each probe coil orientation and that the maximum level recorded be used as the reading for that orientation of the probe coil.

1) The reference plane is the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.

2) The measurement plane is parallel to, and 10 mm in front of, the reference plane.

3) The reference axis is normal to the reference plane and passes through the center of the receiver speaker section (or the center of the hole array); or may be centered on a secondary inductive source. The actual location of the measurement point shall be noted in the test report as the measurement reference point.

4) The measurement points may be located where the axial and radial field intensity measurements are optimum with regard to the requirements. However, the measurement points should be near the acoustic output of the EUT and shall be located in the same half of the phone as the EUT receiver. In a EUT handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.

5) The relative spacing of each measurement orientation is not fixed. The axial and two radial orientations should be chosen to select the optimal position.

6) The measurement point for the axial position is located 10 mm from the reference plane on the measurement axis. The actual location of the measurement point shall be noted in test reports and designated as the measurement reference point.

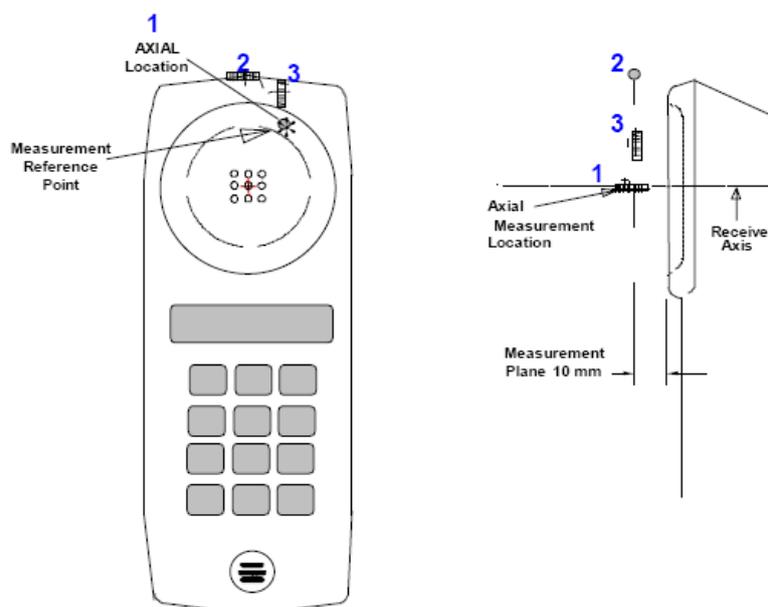


Figure 8 Axis and planes for EUT audio frequency magnetic field measurements

## **2.4. T-Coil Test Procedures**

**The following illustrate a typical test scan over a wireless communications device:**

- 1) Geometry and signal check: system probe alignment, proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the test Arch.
- 2) Set the reference drive level of signal voice defined in C63.19 per 6.3.2.1.
- 3) The ambient and test system background noise (dB A/m) was measured as well as ABM2 over the full measurement. The maximum noise level must be at least 10dB below the limit of C63.19 per 7.3.2.
- 4) The EUT was positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
- 5) The EUT operation for maximum rated RF output power was configured and connected by using of coaxial cable connection to the base station simulator at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The EUT audio output was positioned tangent (as physically possible) to the measurement plane.
- 6) The EUT's RF emission field was eliminated from T-coil results by using a well RF-shielding of the probe, AM1D, and by using of coaxial cable connection to a Base Station Simulator. One test channel was pre-measurement to avoid this possibility.
- 7) Determined the optimal measurement locations for the EUT by following the three steps, coarse resolution scan, fine resolution scans, and point measurement, as described in C63.19 per 6.3.4.4. At each measurement locations, samples in the measurement window duration were evaluated to get ABM1 and the signal spectrum. The noise measurement was performed after the scan with the signal, the same happened, just with the voice signal switched off. The ABM2 was calculated from this second scan.
- 8) All results resulting from a measurement point in a T-Coil job were calculated from the signal samples during this window interval. ABM values were averaged over the sequence of these samples.
- 9) At an optimal point measurement, the SNR (ABM1/ABM2) was calculated for axial, radial transverse and radial longitudinal orientation, and the frequency response was measured in axial axis.
- 10) Corrected for the frequency response after the EUT measurement since the DASY5 system had known the spectrum of the input signal by using a reference job.
- 11) In SEMCAD postprocessing, the spectral points are in addition scaled with the high-pass (half-band) and the A-weighting, bandwidth compensated factor (BWC) and those results are final as shown in this report.

### 3. T-Coil Performance Requirements


In order to be rated for T-Coil use, a EUT shall meet the requirements for signal level and signal quality contained in this part.

#### 3.1.1. T-Coil coupling field intensity

When measured as specified in ANSI C63.19, the T-Coil signal shall be  $\geq -18$  dB (A/m) at 1 kHz, in a 1/3 octave band filter for all orientations.


#### 3.1.2. Frequency response

The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz. The following figures provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

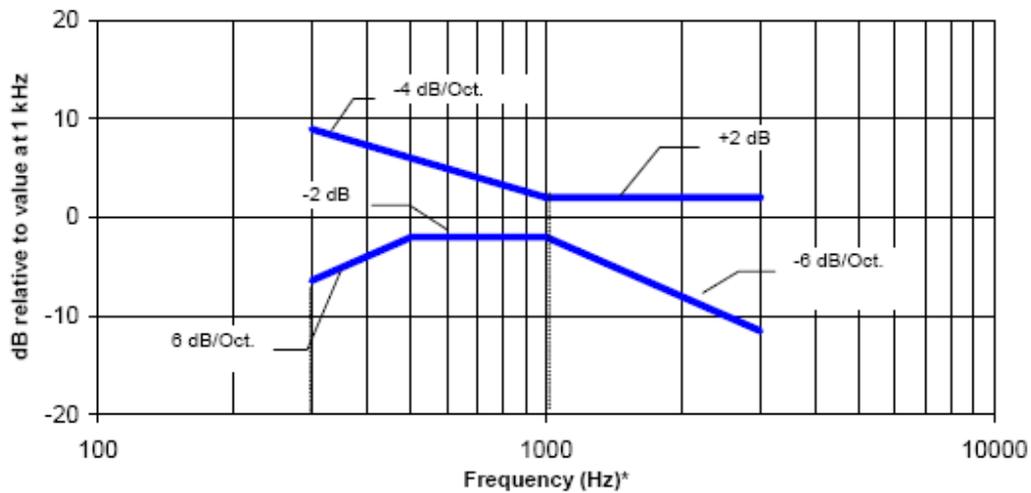

NOTE—Frequency response is between 300 Hz and 3000 Hz.

Figure 9 Magnetic field frequency response for EUTs with a field  $\leq -15$  dB (A/m) at 1 kHz

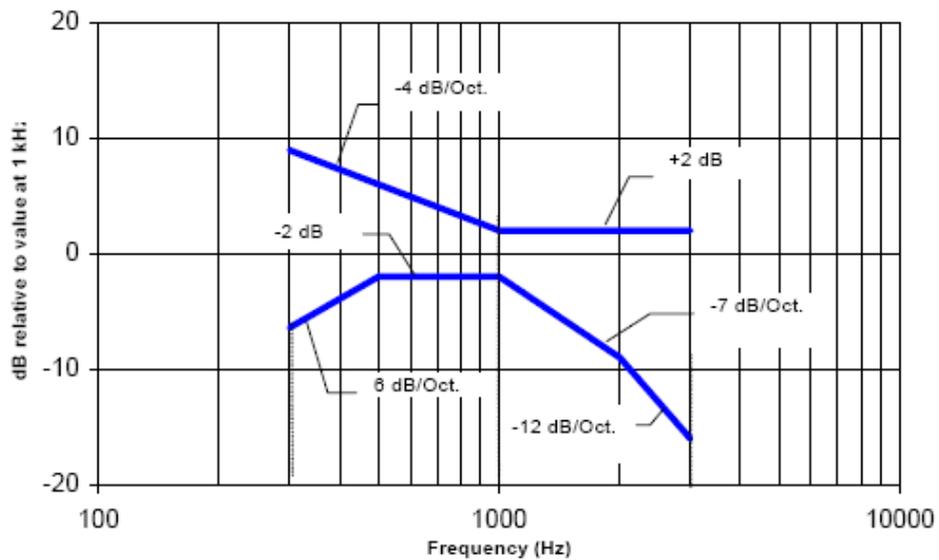

NOTE—Frequency response is between 300 Hz and 3000 Hz.

**Figure 10 Magnetic field frequency response for EUTs with a field that exceeds  $-15$  dB(A/m) at 1 kHz**

### 3.1.3. Signal quality

This part provides the signal quality requirement for the intended T-Coil signal from a EUT. Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criteria that can be measured is the RF immunity in T-Coil mode. This is measured using the same procedure as for the audio coupling mode and at the same levels.

The worst signal quality of the three T-Coil signal measurements shall be used to determine the T-Coil mode category per Table 1.

**Table 1: T-Coil signal quality categories**


Category	Telephone parameters WD signal quality [(signal + noise) – to – noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

## 4. Summary Test Results

### 4.1. CDMA Cellular (Initial Model: HUAWEI H866C, H866C)

**Battery (SN: UAIBC16X03002980)**

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1 $\geq$ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
CDMA Cellular-384	x (Radial):	(-9,0)	-9.96	34.8	/	T4
	y (Radial):	(0,-6)	-9.37	42.9		T4
	z (Axial):	(-4,0)	-3.92	36.5	Pass	T4

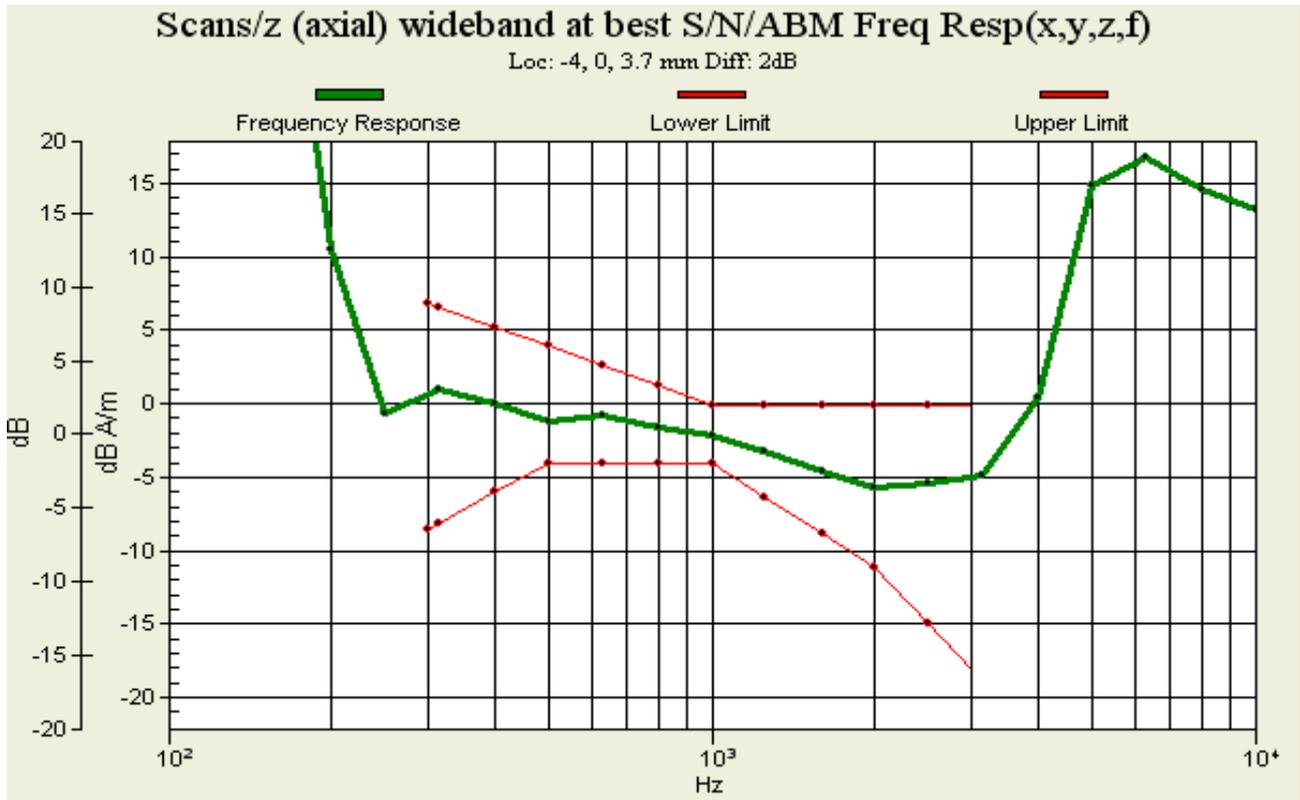

# TA Technology (Shanghai) Co., Ltd. Test Report

**Battery (SN: UNDC306X03000327)**

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1≥ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
CDMA Cellular-384	x (Radial):	(-6,0)	-8.63	34.5	/	T4
	y (Radial):	(-3,-6)	-10.4	43.2		T4
	z (Axial):	(-4,0)	-4.32	37.4	Pass	T4

**Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)**

Loc: -4, 0, 3.7 mm Diff: 2dB



# TA Technology (Shanghai) Co., Ltd. Test Report

### Battery (SN: WHCC115691073294)

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1 $\geq$ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
CDMA Cellular-384	x (Radial):	(-9,-3)	-9.86	25.3	/	T3
	y (Radial):	(0,-6)	-9.35	40.8		T4
	z (Axial):	(-2,-2)	-2.08	34.8	Pass	T4

**Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)**

Loc: -2, -2, 3.7 mm Diff: 2dB



# TA Technology (Shanghai) Co., Ltd.


## Test Report

**Battery (SN: MHCBB06614437882)**

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1≥ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
CDMA Cellular-384	x (Radial):	(-6,0)	-9.36	34.5	/	T4
	y (Radial):	(-3,-6)	-10.7	41.3		T4
	z (Axial):	(-4,0)	-3.17	37.1	Pass	T4

**Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)**

Loc: -4, 0, 3.7 mm Diff: 2dB

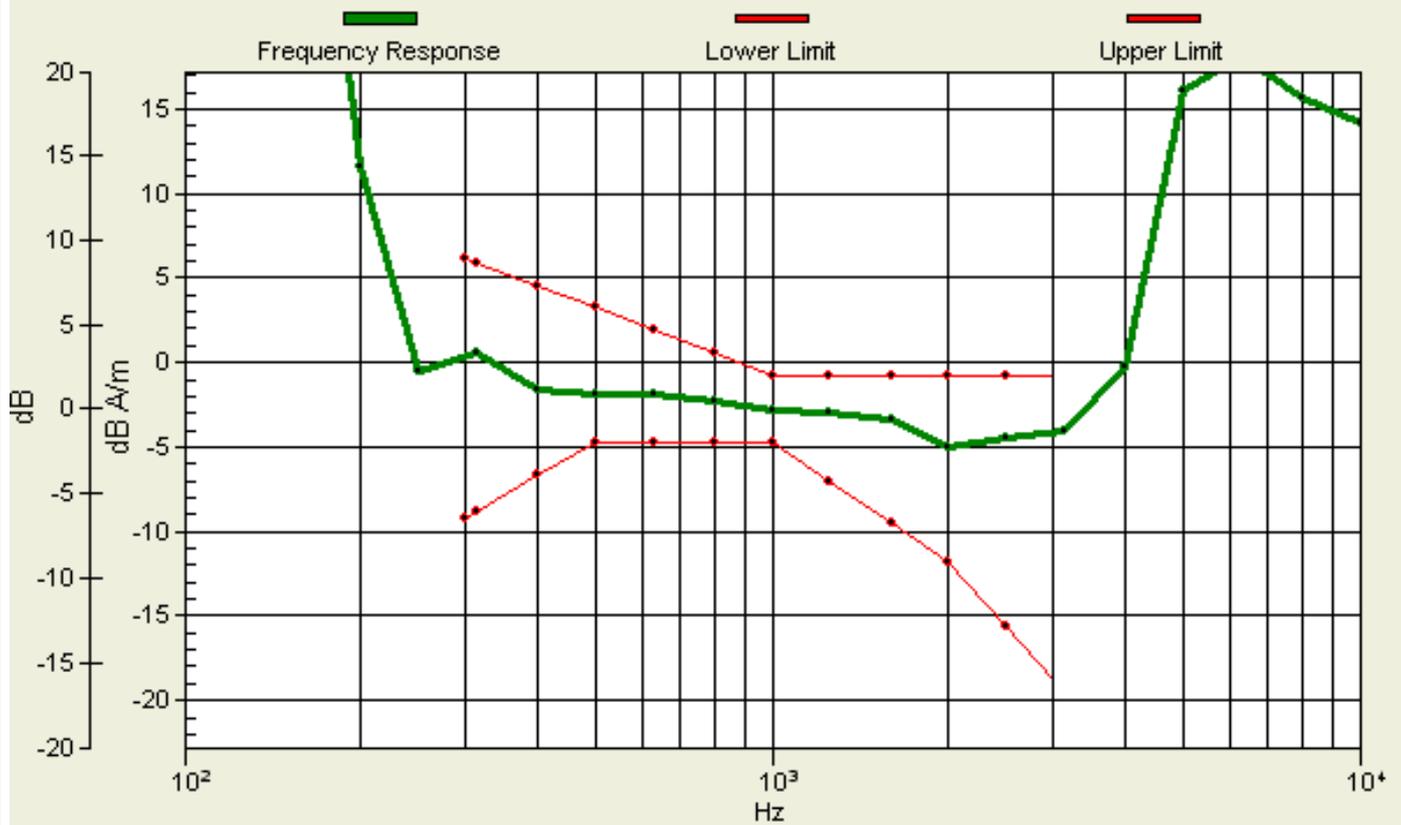


# TA Technology (Shanghai) Co., Ltd. Test Report

## 4.2. CDMA PCS (Initial Model: HUAWEI H866C, H866C)

**Battery (SN: UAIBC16X03002980)**


Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1 $\geq$ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
CDMA PCS-600	x (Radial):	(-6,3)	-9.53	33.5	/	T4
	y (Radial):	(3,-6)	-10.7	40.2		T4
	z (Axial):	(-2,0)	-2.53	35.3	Pass	T4

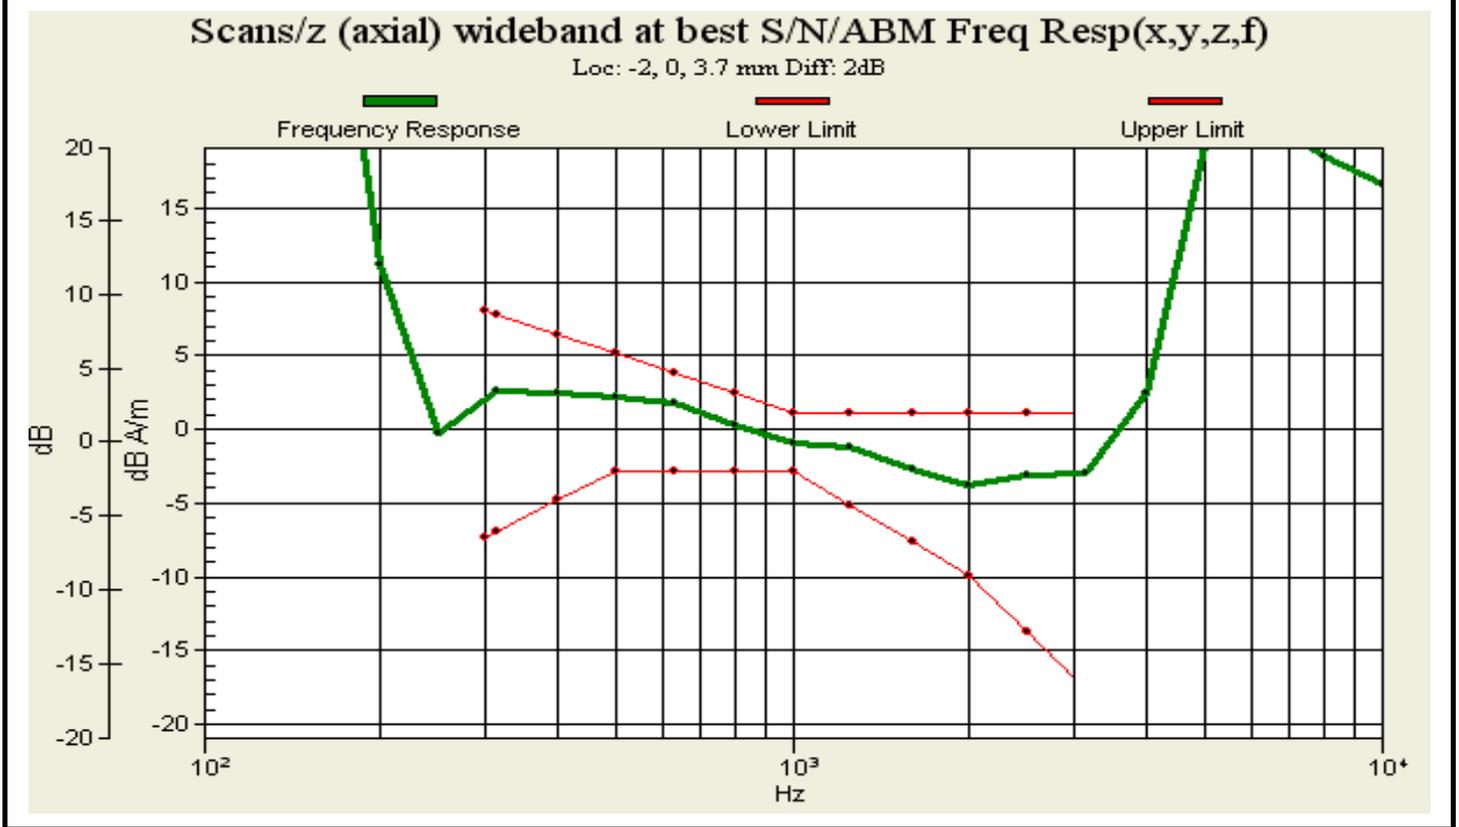

# TA Technology (Shanghai) Co., Ltd. Test Report

**Battery (SN: UNDC306X03000327)**

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1≥ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
CDMA PCS-600	x (Radial):	(-6,0)	-8.65	30.4	/	T4
	y (Radial):	(3,-6)	-9.89	40.1		T4
	z (Axial):	(0,4)	-2.18	35.0	Pass	T4

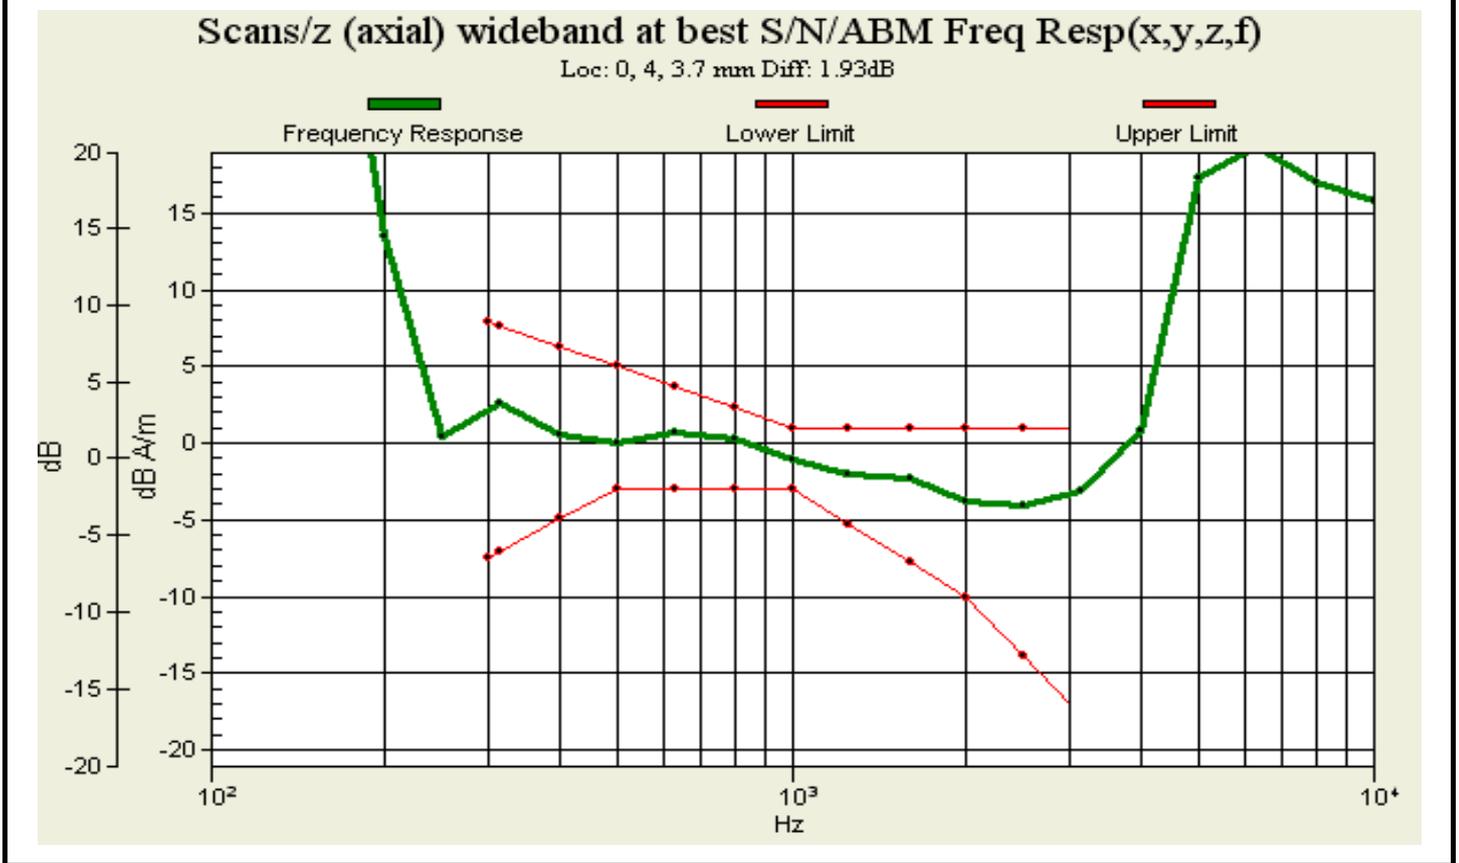

# TA Technology (Shanghai) Co., Ltd. Test Report

### Battery (SN: WHCC115691073294)

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1 $\geq$ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
CDMA PCS-600	x (Radial):	(-6,3)	-8.91	29.4	/	T3
	y (Radial):	(0,-6)	-10.1	40.1		T4
	z (Axial):	(0,0)	-1.05	34.7	Pass	T4

**Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)**


Loc: 0, 0, 3.7 mm Diff: 1.98dB



# TA Technology (Shanghai) Co., Ltd. Test Report

### Battery (SN: MHCBB066I4437882)

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1 $\geq$ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
CDMA PCS-600	x (Radial):	(-6,-1.2)	-8.09	31.7	/	T4
	y (Radial):	(-3,-7.2)	-10.8	40.2		T4
	z (Axial):	(-2,-0.2)	-2.64	35.8	Pass	T4

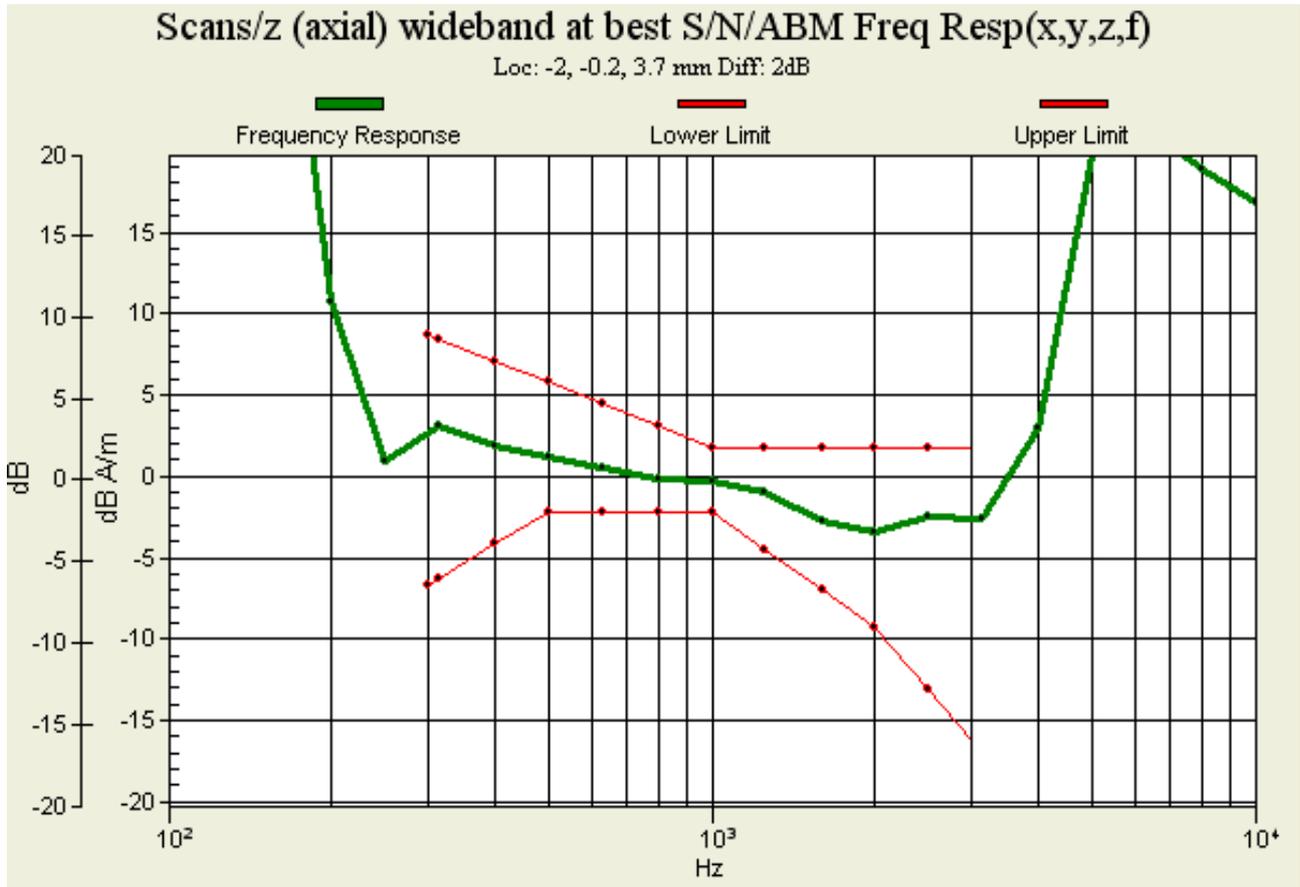

# TA Technology (Shanghai) Co., Ltd. Test Report


### 4.3. CDMA AWS (Variant Model: HUAWEI M866, M866)

**Battery (SN: UAIBC16X03002980)**

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1 $\geq$ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
CDMA AWS-450	x (Radial):	(-9,0)	-9.16	37.6	/	T4
	y (Radial):	(3,-6)	-9.67	41.7		T4
	z (Axial):	(-2,2)	-2.63	38.6	Pass	T4

**Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)**


Loc: -2, 2, 3.7 mm Diff: 2dB

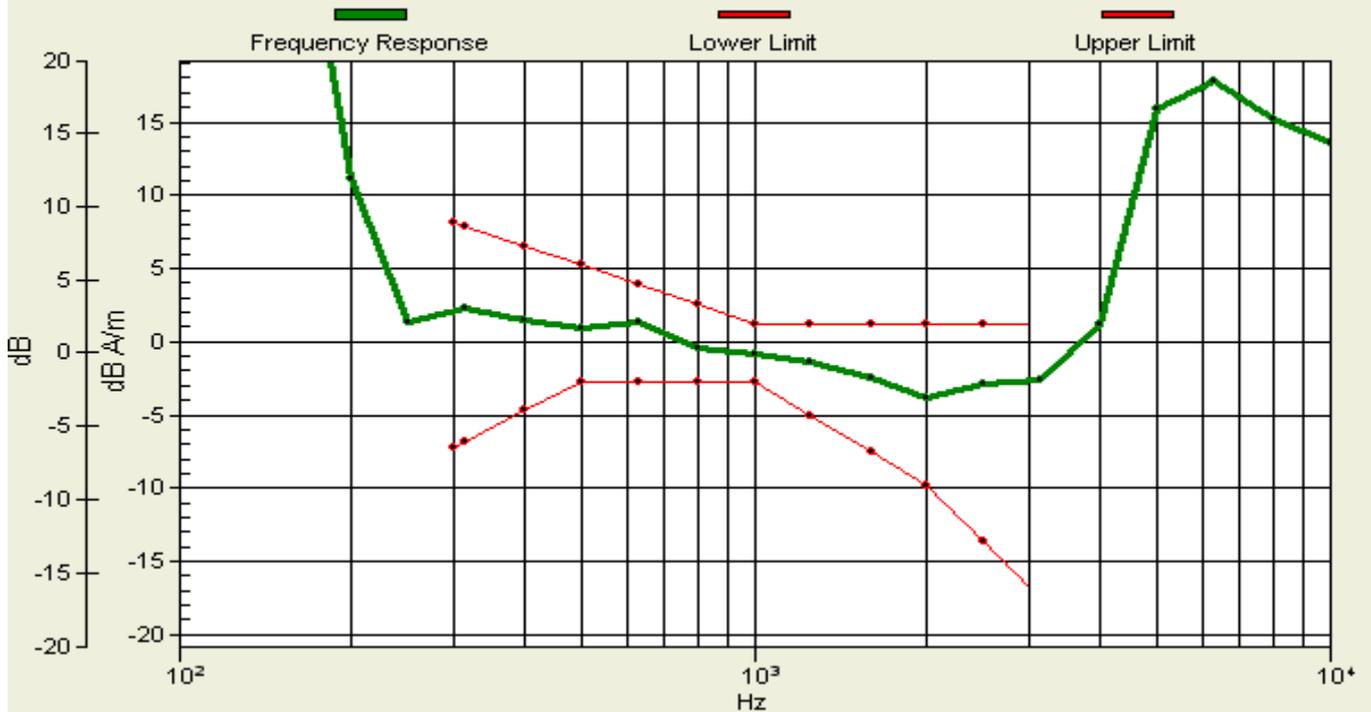

# TA Technology (Shanghai) Co., Ltd. Test Report

### Battery (SN: UNDC306X03000327)

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1 $\geq$ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
CDMA AWS-450	x (Radial):	(-9,1.2)	-9.39	37.5	/	T4
	y (Radial):	(-3,-4.8)	-10.3	43.1		T4
	z (Axial):	(-2,2.2)	-1.94	39.2	Pass	T4

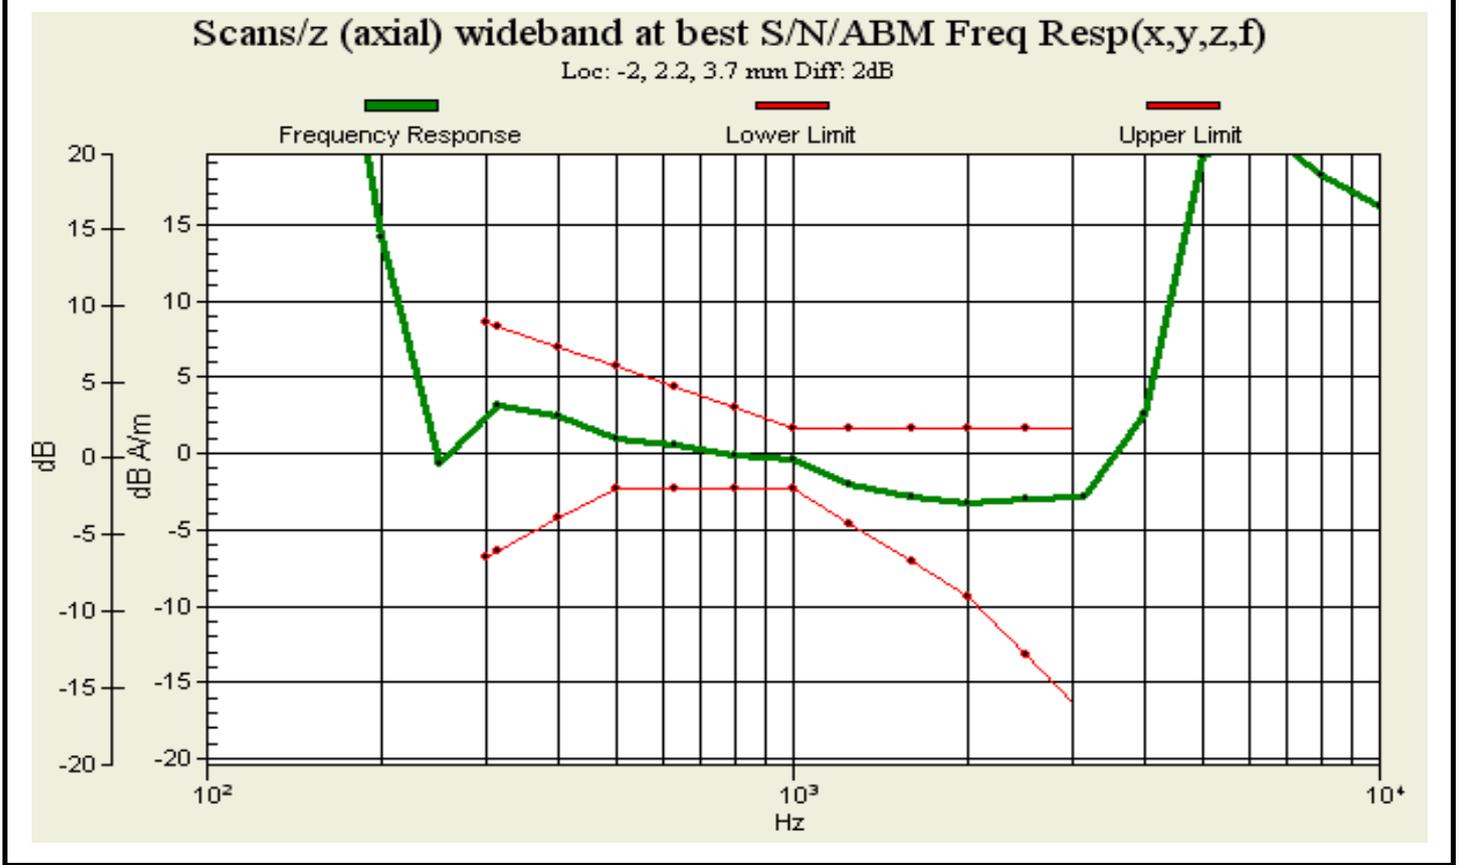


# TA Technology (Shanghai) Co., Ltd.

## Test Report

**Battery (SN: WHCC115691073294)**


Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1≥ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
CDMA AWS-450	x (Radial):	(6,3)	-9.41	35.2	/	T4
	y (Radial):	(-3,-6)	-9.84	42.7		T4
	z (Axial):	(0,0)	-1.47	34.1	Pass	T4

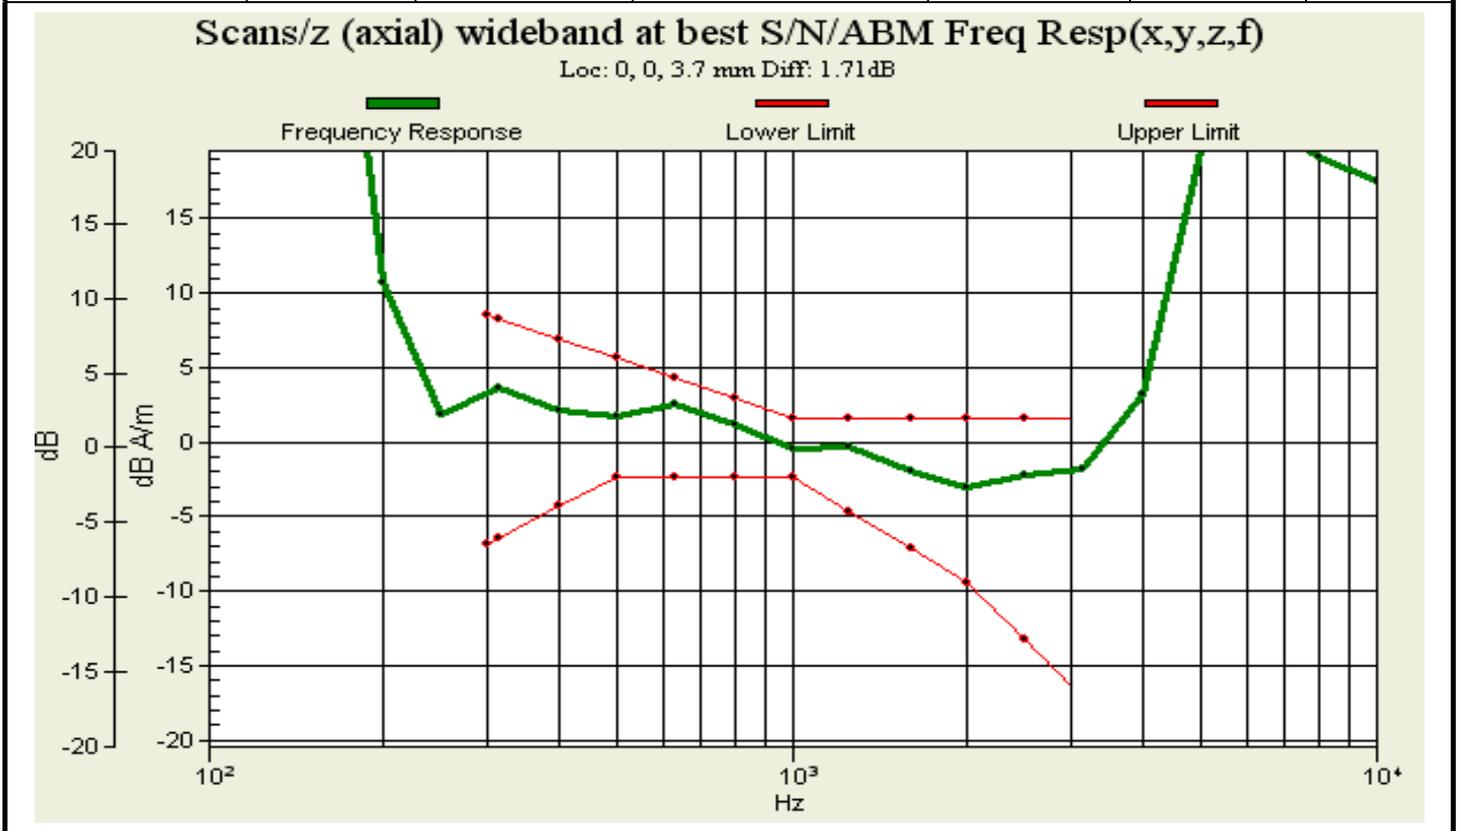

# TA Technology (Shanghai) Co., Ltd. Test Report

**Battery (SN: MHCBB066I4437882)**

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1 $\geq$ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
CDMA AWS-450	x (Radial):	(-9,-3)	-9.58	37.7	/	T4
	y (Radial):	(-3,-6)	-11.4	41.8		T4
	z (Axial):	(-2,0)	-2.64	38.7	Pass	T4

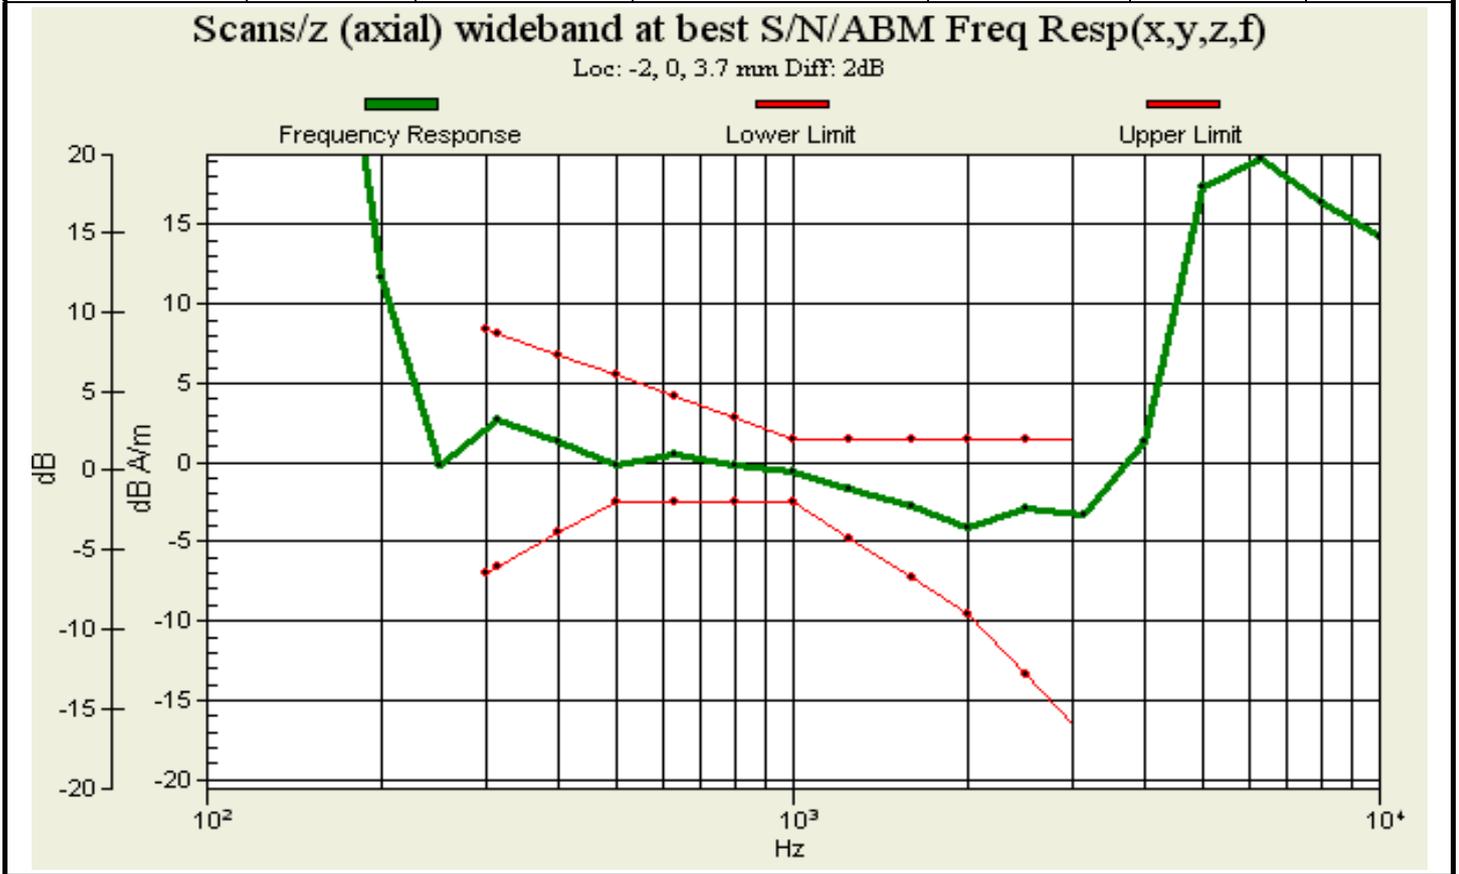

**Note:**

1. The LCD backlight is turn off and volume is adjusted to maximum level during T-Coil testing.
2. Signal strength measurement scan plots are presented in Annex B.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 32 of 168

### 5. 300MHz to 3GHz Measurement Uncertainty

No.	Error source	Type	Uncertainty Value $a_i$ (%)	Prob. Dist.	k	ABM 1 $c_i$	ABM2 $c_i$	Std. Unc. ABM1 $u_i$ (%)	Std. Unc. ABM2 $u_i$ (%)	Degree of freedom $V_{eff}$ or $V_i$
1	System Repeatability	A	0.016	N	1	1	1	0.016	0.016	9
<b>Probe Sensitivity</b>										
2	Reference Level	B	3.0	R	$\sqrt{3}$	1	1	3.0	3.0	$\infty$
3	AMCC Geometry	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	$\infty$
4	AMCC Current	B	0.6	R	$\sqrt{3}$	1	1	0.4	0.4	$\infty$
5	Probe Positioning during Calibration	B	0.1	R	$\sqrt{3}$	1	1	0.1	0.1	$\infty$
6	Noise Contribution	B	0.7	R	$\sqrt{3}$	$\frac{0.014}{3}$	1	0.0	0.4	$\infty$
7	Frequency Slope	B	5.9	R	$\sqrt{3}$	0.1	1	0.3	3.5	$\infty$
<b>Probe System</b>										
8	Repeatability / Drift	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
9	Linearity / Dynamic Range	B	0.6	N	1	1	1	0.4	0.4	$\infty$
10	Acoustic Noise	B	1.0	R	$\sqrt{3}$	0.1	1	0.1	0.6	$\infty$
11	Probe Angle	B	2.3	R	$\sqrt{3}$	1	1	1.4	1.4	$\infty$
12	Spectral Processing	B	0.9	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$
13	Integration Time	B	0.6	N	1	1	5	0.6	3.0	$\infty$
14	Field Distribution	B	0.2	R	$\sqrt{3}$	1	1	0.1	0.1	$\infty$
<b>Test Signal</b>										
15	Ref.Signal Spectral Response	B	0.6	R	$\sqrt{3}$	0	1	0.0	0.4	$\infty$
<b>Positioning</b>										
16	Probe Positioning	B	1.9	R	$\sqrt{3}$	1	1	1.1	1.1	$\infty$
17	Phantom Thickness	B	0.9	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 33 of 168

18	EUT Positioning	B	1.9	R	$\sqrt{3}$	1	1	1.1	1.1	$\infty$
<b>External Contributions</b>										
19	RF Interference	B	0.0	R	$\sqrt{3}$	1	0.3	0.0	0.0	$\infty$
20	Test Signal Variation	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	$\infty$
Combined Std. Uncertainty (ABM Field)		$u'_c = \sqrt{\sum_{i=1}^{20} c_i^2 u_i^2}$						4.1	6.1	
Expanded Std. Uncertainty		$u_e = 2u_c$		N		$k = 2$		<b>8.2</b>	<b>12.2</b>	

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 34 of 168

**6. Main Test Instruments**

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Audio Magnetic 1D Field Probe	AM1DV3	3082	February 17, 2012	One year
02	Audio Magnetic Calibration Coil	SD HAC P02A	1112	N/A	N/A
03	Audio Measuring Instrument	AMMI	1101	N/A	N/A
05	DAE	DAE4	871	November 22, 2011	One year
06	Software	DASY5, V5.2 Build 162	N/A	N/A	N/A
07	Software	SEMCAD X Version 14.0 Build 59	N/A	N/A	N/A
08	Universal Radio Communication Tester	CMU 200	118133	May 26, 2011	One year
09	TMFS	TMFS	1018	December 6, 2010	Two years
10	Hygrothermograph	WS-1	64591	September 28, 2011	One year

\*\*\*\*\*END OF REPORT \*\*\*\*\*

**ANNEX A: Test Layout**



**Picture 1: HAC T-Coil System Layout**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 36 of 168

**ANNEX B: Graph Results**

**T-Coil CDMA Cellular X longitudinal (SN: UAIBC16X03002980)**

Date/Time: 5/9/2012 7:04:53 PM

Communication System: CDMA ; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UAIBC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/x (longitudinal)**

**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.78 dB A/m

BWC Factor = 0.162972 dB

Location: -4.2, 0, 3.7 mm

**M866 With Battery UAIBC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/x (longitudinal)**

**fine 3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 37 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.64 dB A/m

BWC Factor = 0.162972 dB

Location: 9, 0, 3.7 mm

**M866 With Battery UAIBC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/x (longitudinal)  
fine 3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 34.8 dB

ABM1 comp = -9.96 dB A/m

BWC Factor = 0.162972 dB

Location: -9, 0, 3.7 mm

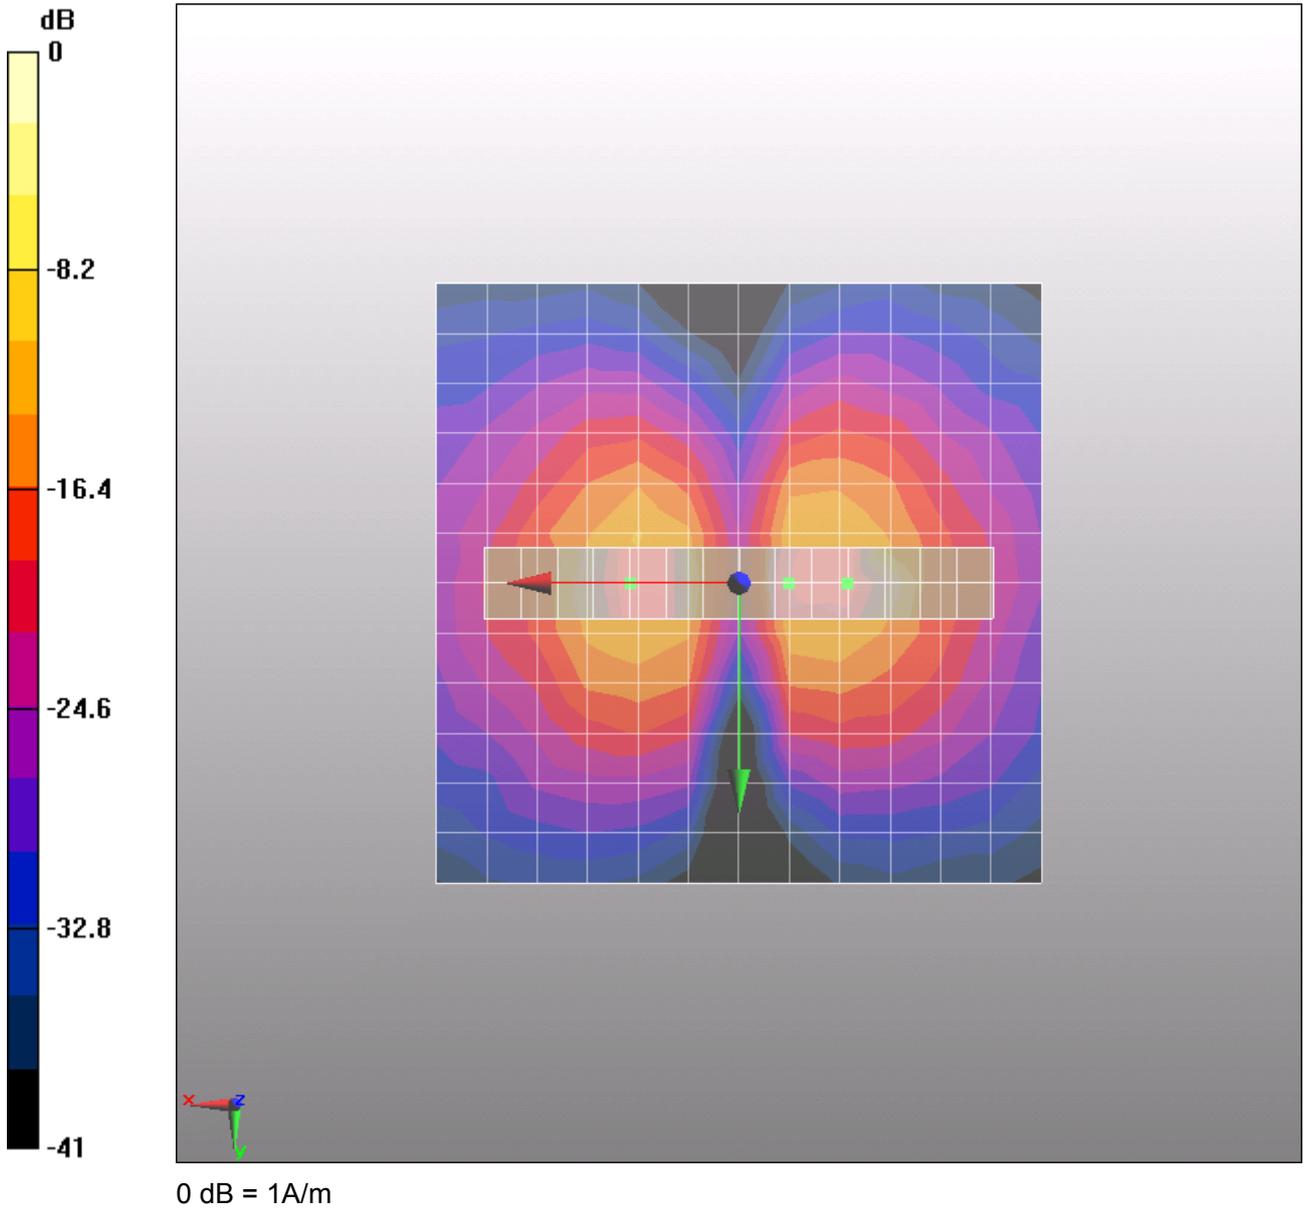


Figure 11 T-Coil CDMA Cellular X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 39 of 168

**T-Coil CDMA Cellular Y transversal (SN: UAIBC16X03002980)**

Date/Time: 5/9/2012 7:15:44 PM

Communication System: CDMA ; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UAIBC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/y (transversal)**

**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -8.62 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -8.3, 3.7 mm

**M866 With Battery UAIBC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/y (transversal)**

**fine 3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 40 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1 comp = -8.68 dB A/m

BWC Factor = 0.162972 dB

Location: 3, -9, 3.7 mm

### M866 With Battery UAIBC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/y (transversal) fine 3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1/ABM2 = 42.9 dB

ABM1 comp = -9.37 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -6, 3.7 mm

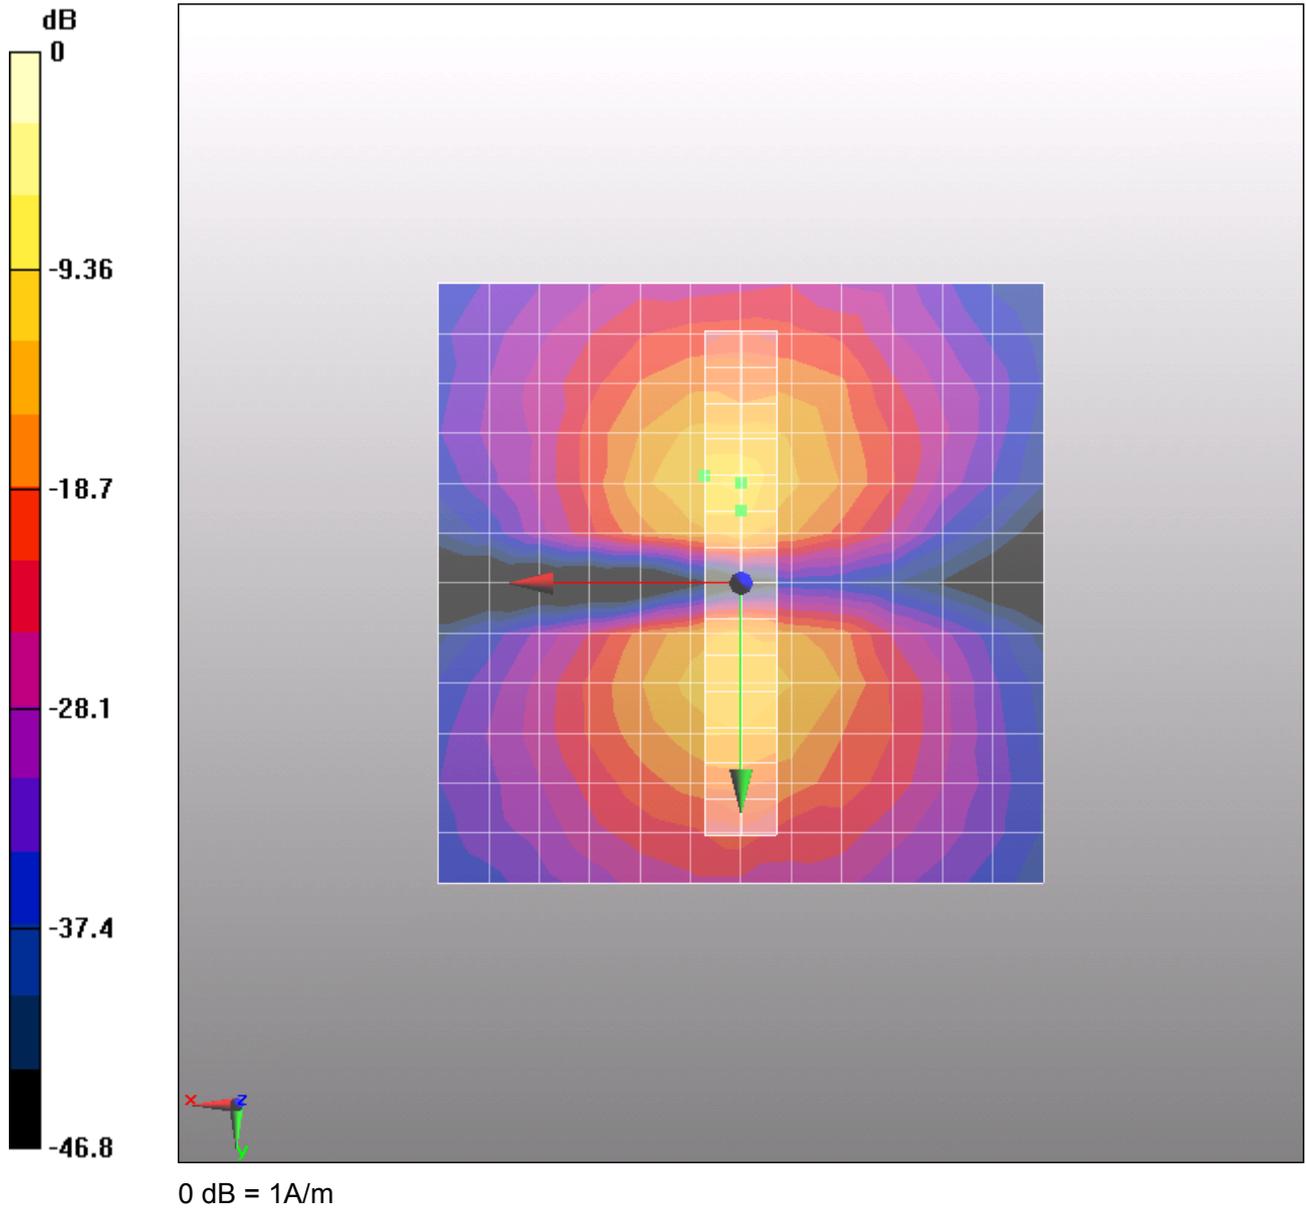


Figure 12 T-Coil CDMA Cellular Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 42 of 168

**T-Coil CDMA Cellular Z Axial (SN: UAIBC16X03002980)**

Date/Time: 5/9/2012 6:53:39 PM

Communication System: CDMA ; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UAIBC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -2.03 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

**M866 With Battery UAIBC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 43 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1 comp = -2.45 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

### M866 With Battery UAIBC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM SNR(x,y,z) (5x5x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1/ABM2 = 36.5 dB

ABM1 comp = -3.92 dB A/m

BWC Factor = 0.162972 dB

Location: -4, 0, 3.7 mm

### M866 With Battery UAIBC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 56.4

Measure Window Start: 0ms

Measure Window Length: 2000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 44 of 168

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -4, 0, 3.7 mm

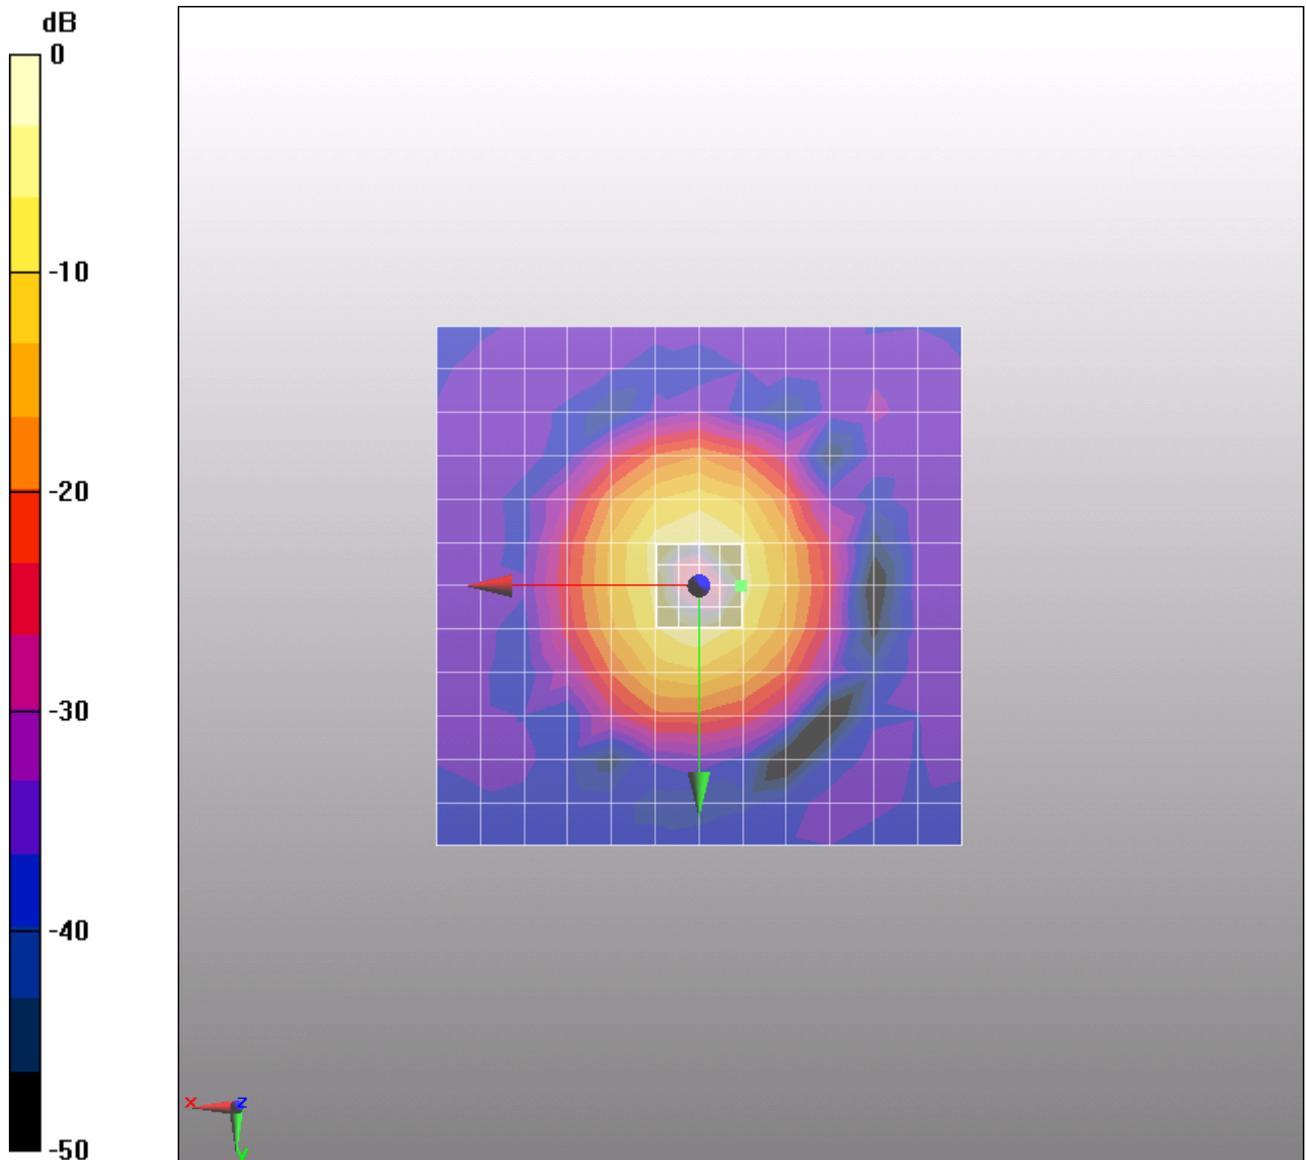

0 dB = 1A/m

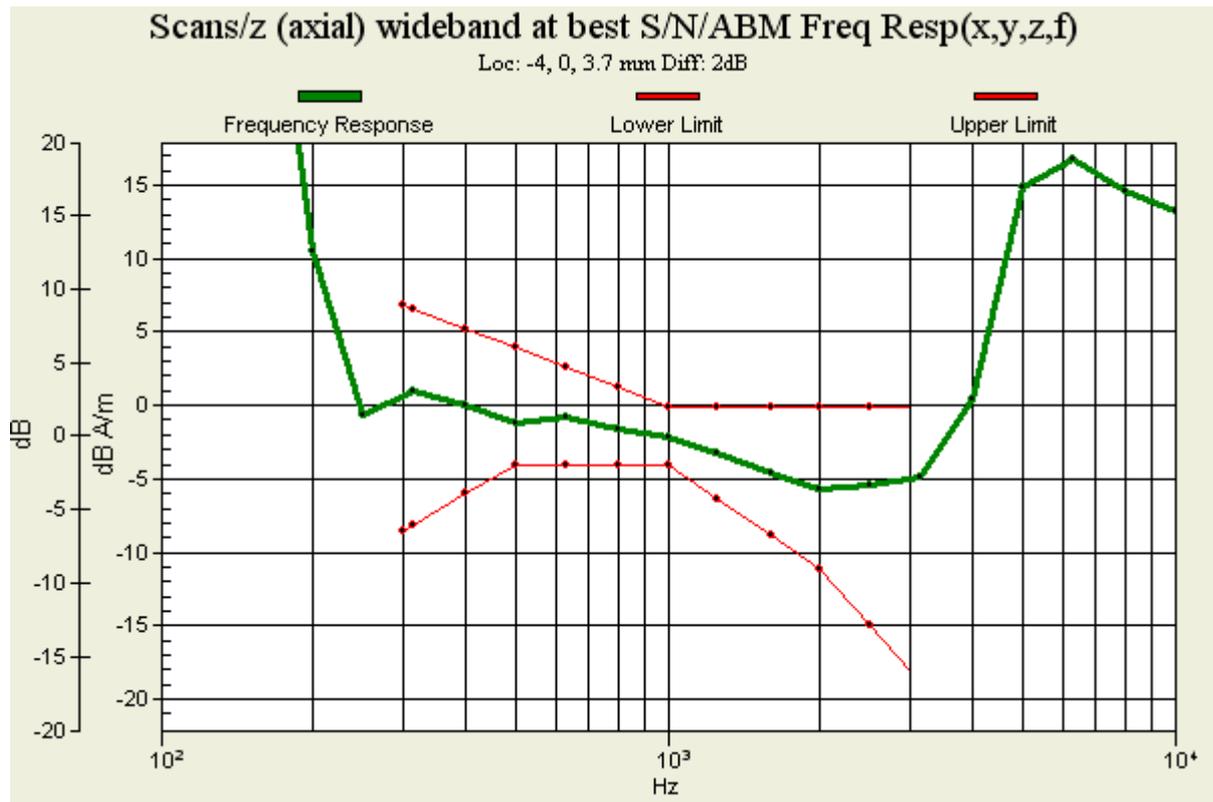


Figure 13 T-Coil CD T-Coil CDMA Cellular Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 46 of 168

**T-Coil CDMA Cellular X longitudinal (SN: UNDC306X03000327)**

Date/Time: 5/9/2012 6:17:46 PM

Communication System: CDMA ; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UNDC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/x (longitudinal)**

**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.32 dB A/m

BWC Factor = 0.162972 dB

Location: 8.3, 0, 3.7 mm

**M866 With Battery UNDC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/x (longitudinal)**

**fine 3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 47 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1 comp = -8.63 dB A/m

BWC Factor = 0.162972 dB

Location: -6, 0, 3.7 mm

### M866 With Battery UNDC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/x (longitudinal) fine 3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1/ABM2 = 34.5 dB

ABM1 comp = -8.63 dB A/m

BWC Factor = 0.162972 dB

Location: -6, 0, 3.7 mm

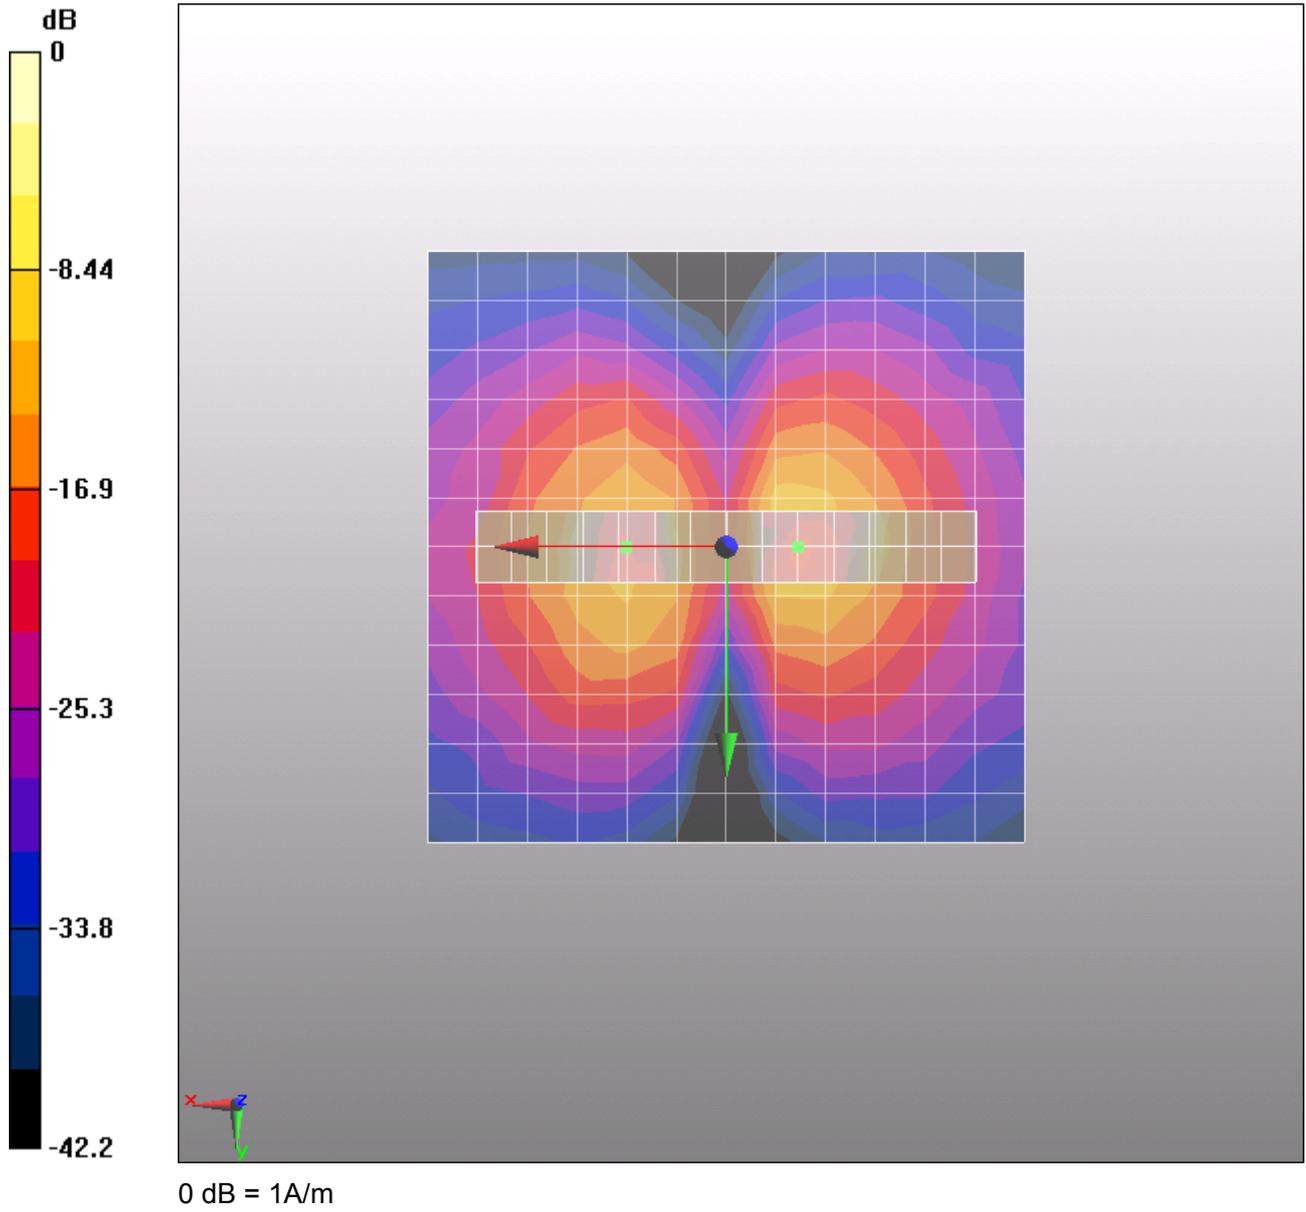


Figure 14 T-Coil CDMA Cellular X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 49 of 168

**T-Coil CDMA Cellular Y transversal (SN: UNDC306X03000327)**

Date/Time: 5/9/2012 6:29:24 PM

Communication System: CDMA ; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UNDC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/y (transversal)**

**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -8.55 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -8.3, 3.7 mm

**M866 With Battery UNDC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/y (transversal) fine**

**3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 50 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -8.68 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -9, 3.7 mm

**M866 With Battery UNDC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/y (transversal) fine  
3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 43.2 dB

ABM1 comp = -10.4 dB A/m

BWC Factor = 0.162972 dB

Location: -3, -6, 3.7 mm

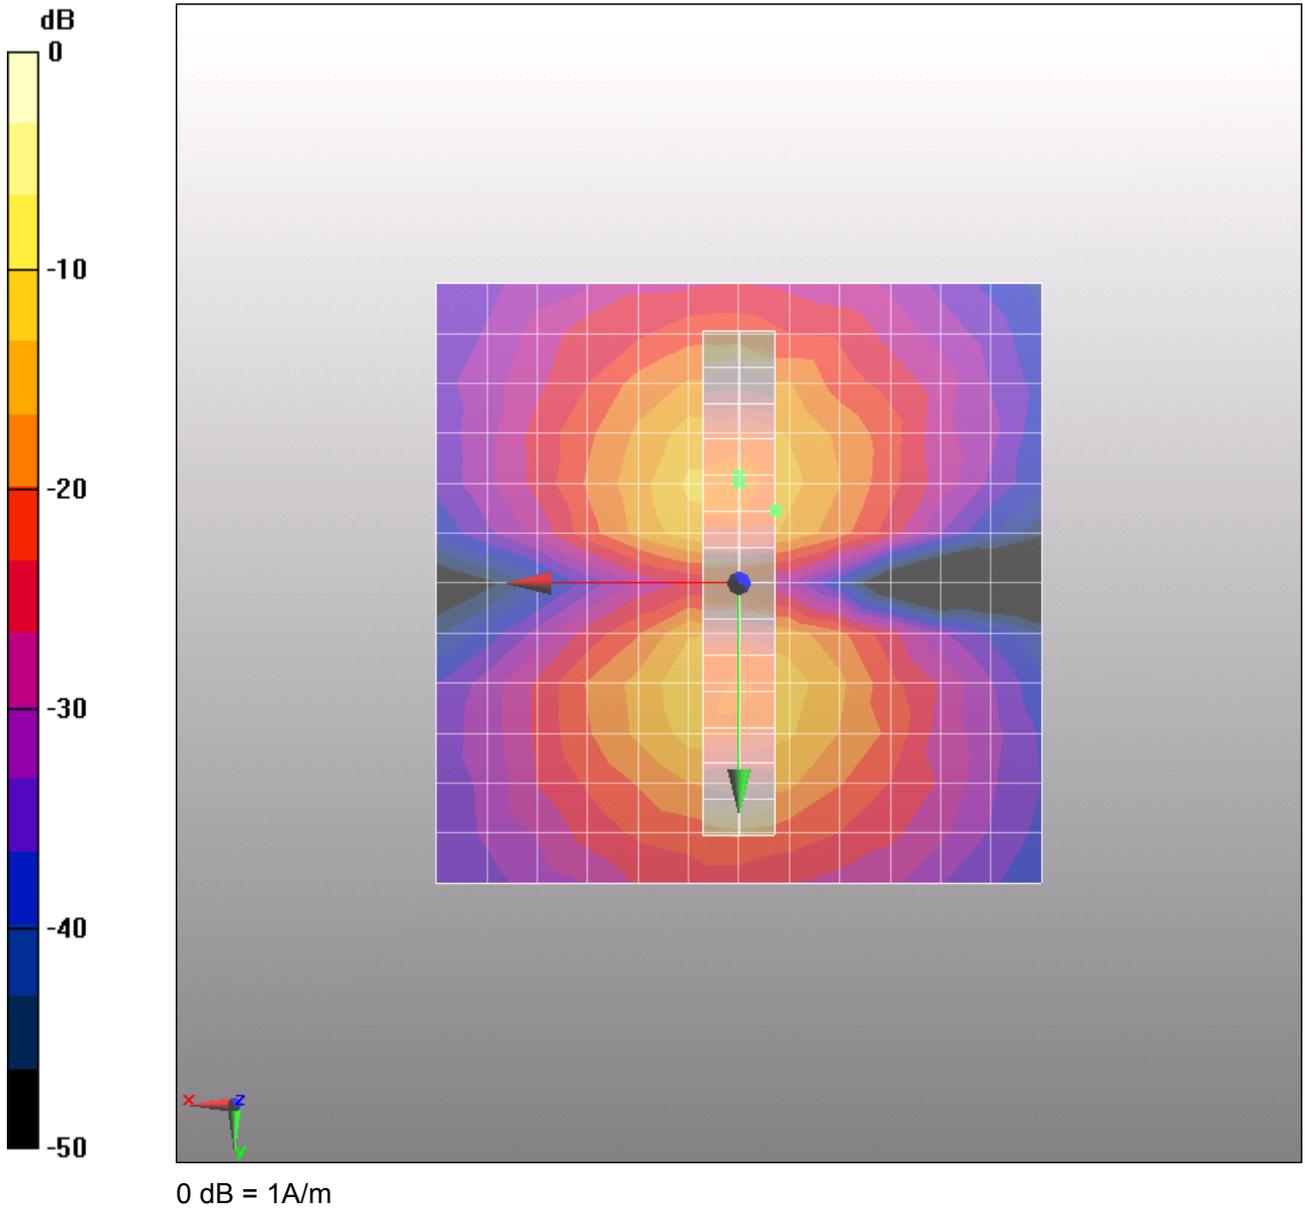


Figure 15 T-Coil CDMA Cellular Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 52 of 168

**T-Coil CDMA Cellular Z Axial (SN: UNDC306X03000327)**

Date/Time: 5/9/2012 5:55:07 PM

Communication System: CDMA ; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UNDC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -1.96 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

**M866 With Battery UNDC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 53 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -1.8 dB A/m

BWC Factor = 0.162972 dB

Location: 2, -2, 3.7 mm

**M866 With Battery UNDC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) fine 2mm  
8 x 8/ABM SNR(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 37.4 dB

ABM1 comp = -4.32 dB A/m

BWC Factor = 0.162972 dB

Location: -4, 0, 3.7 mm

**M866 With Battery UNDC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) wideband  
at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 56.4

Measure Window Start: 0ms

Measure Window Length: 2000ms

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RHA1204-0013HAC02R3

Page 54 of 168

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -4, 0, 3.7 mm

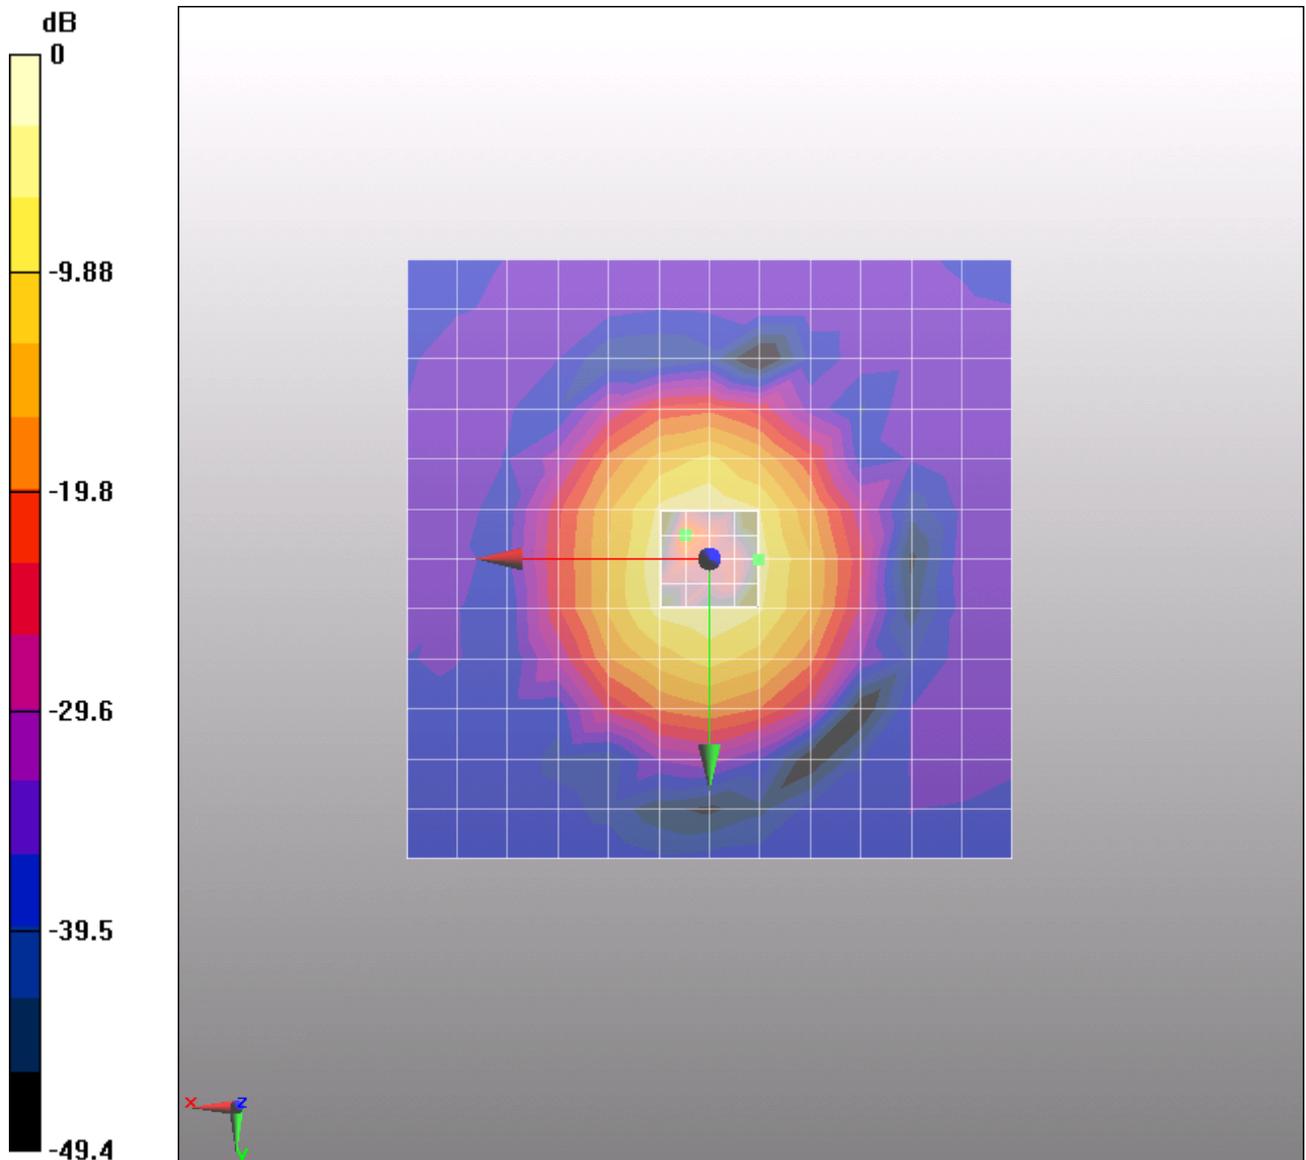

0 dB = 1A/m

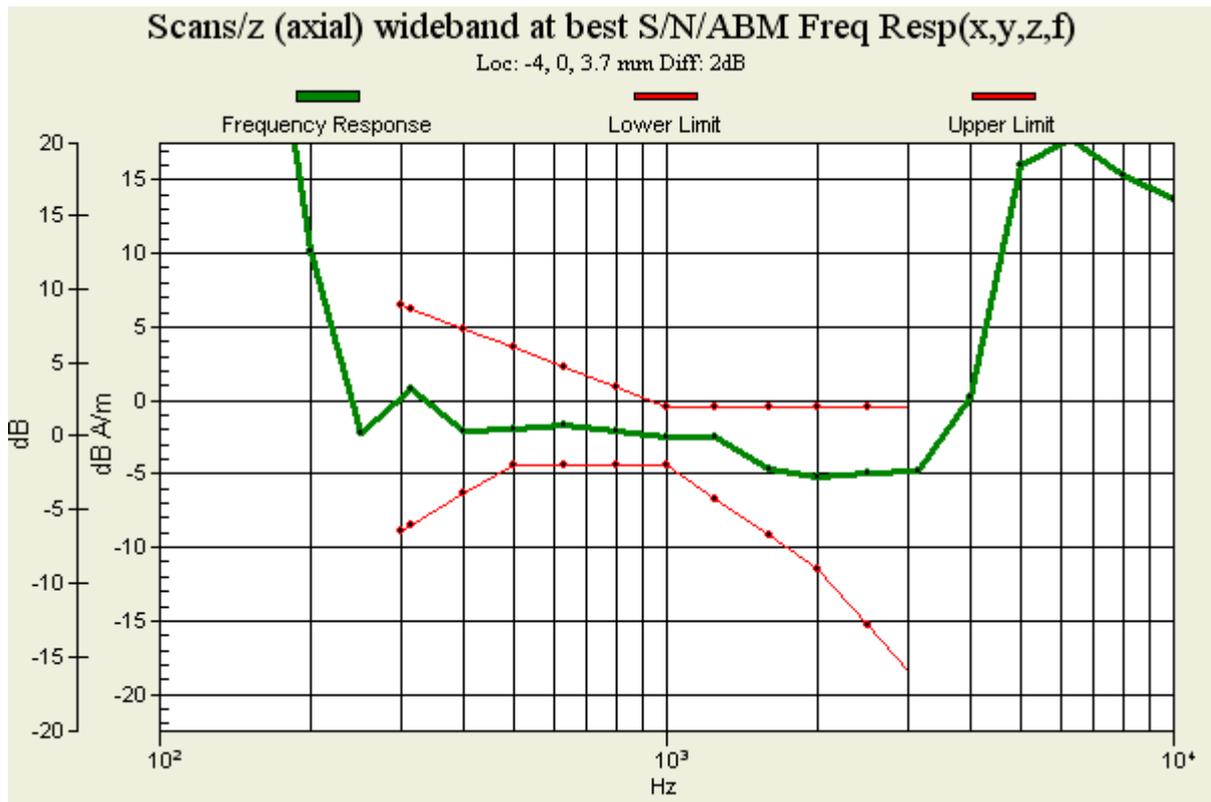


Figure 16 T-Coil CD T-Coil CDMA Cellular Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 56 of 168

**T-Coil CDMA Cellular X longitudinal (SN: WHCC115691073294)**

Date/Time: 5/9/2012 7:44:20 PM

Communication System: CDMA ; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery WHCC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/x (longitudinal)**

**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.66 dB A/m

BWC Factor = 0.162972 dB

Location: -8.3, 0, 3.7 mm

**M866 With Battery WHCC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/x (longitudinal)**

**fine 3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 57 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

<b>Category</b>	<b>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</b>
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -8.88 dB A/m

BWC Factor = 0.162972 dB

Location: 6, 0, 3.7 mm

**M866 With Battery WHCC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/x (longitudinal)  
fine 3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

<b>Category</b>	<b>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</b>
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 25.3 dB

ABM1 comp = -9.86 dB A/m

BWC Factor = 0.162972 dB

Location: -9, -3, 3.7 mm

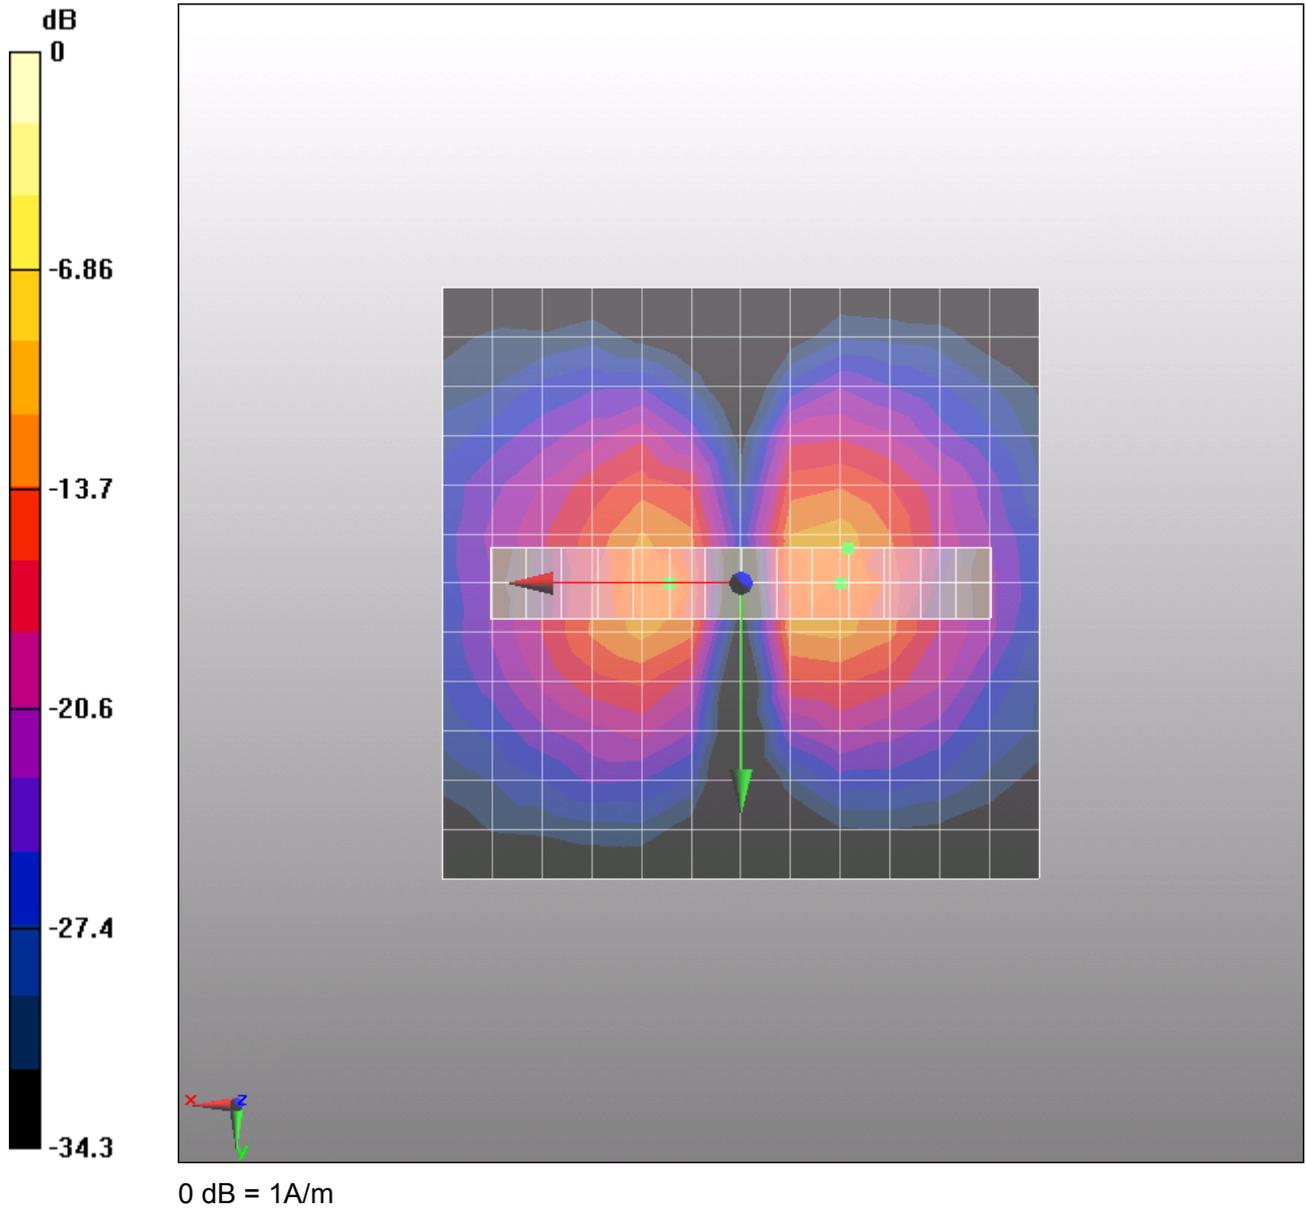


Figure 17 T-Coil CDMA Cellular X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 59 of 168

**T-Coil CDMA Cellular Y transversal (SN: WHCC115691073294)**

Date/Time: 5/9/2012 7:56:33 PM

Communication System: CDMA ; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery WHCC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/y (transversal)**

**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.05 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -8.3, 3.7 mm

**M866 With Battery WHCC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/y (transversal)**

**fine 3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 60 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

<b>Category</b>	<b>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</b>
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.17 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 6, 3.7 mm

**M866 With Battery WHCC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

<b>Category</b>	<b>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</b>
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 40.8 dB

ABM1 comp = -9.35 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -6, 3.7 mm

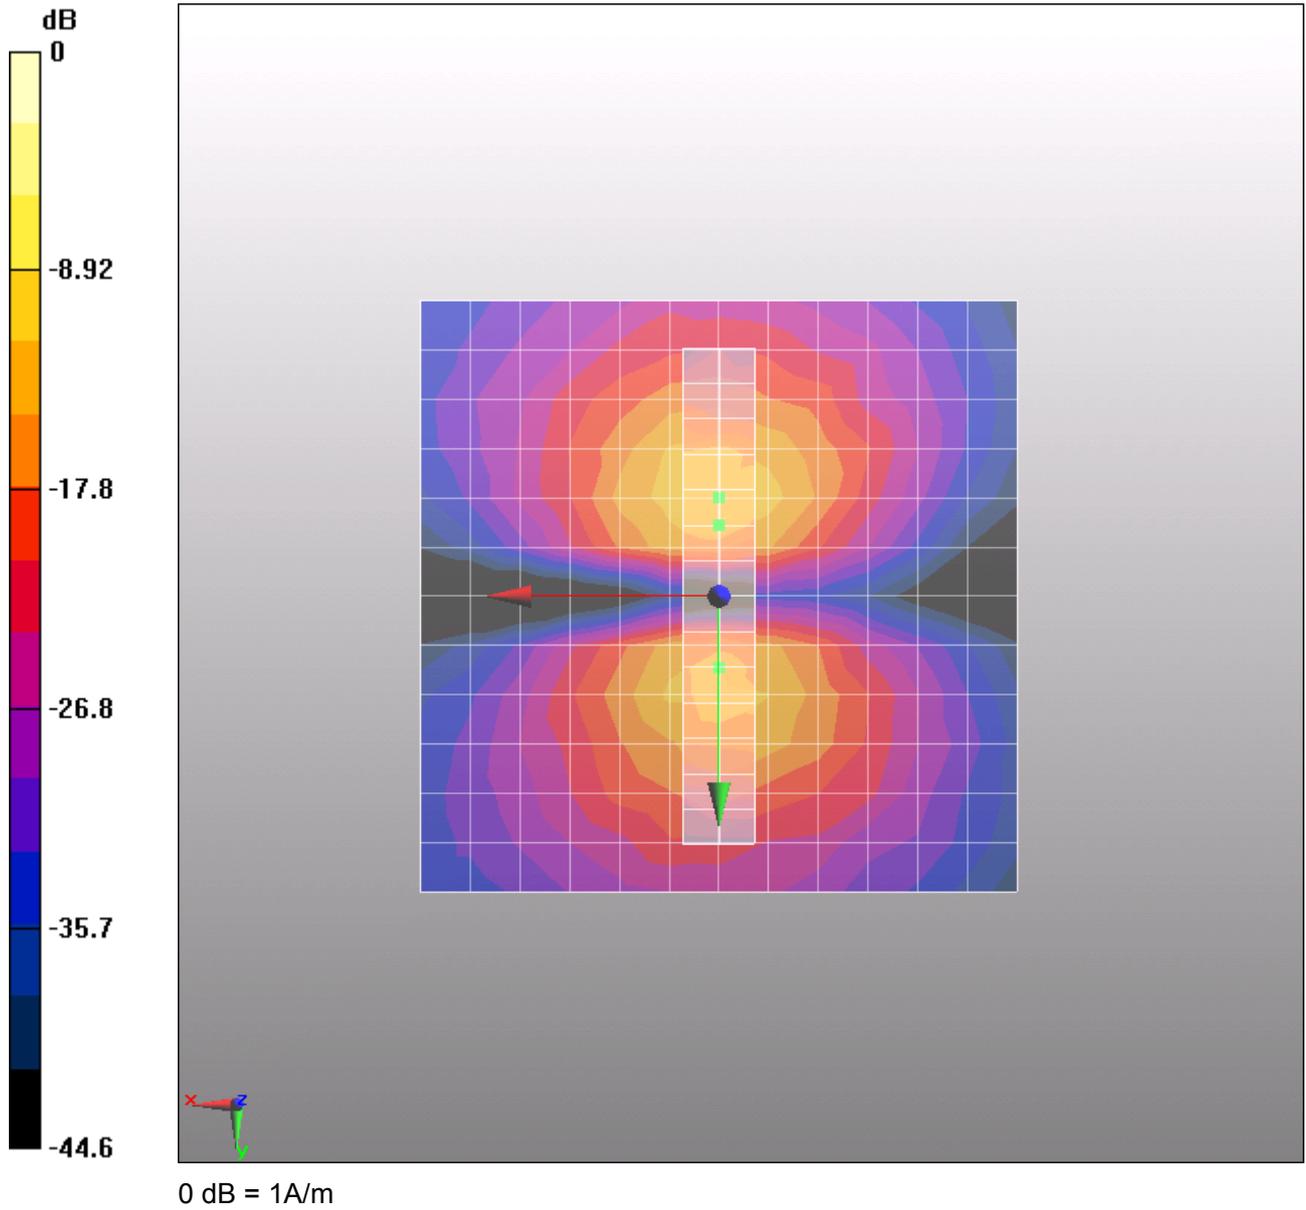


Figure 18 T-Coil CDMA Cellular Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 62 of 168

**T-Coil CDMA Cellular Z Axial (SN: WHCC115691073294)**

Date/Time: 5/9/2012 7:33:16 PM

Communication System: CDMA ; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery WHCC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -1.98 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

**M866 With Battery WHCC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 63 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1 comp = -1.76 dB A/m

BWC Factor = 0.162972 dB

Location: 2, 0, 3.7 mm

### M866 With Battery WHCC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM SNR(x,y,z) (5x5x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1/ABM2 = 34.8 dB

ABM1 comp = -2.08 dB A/m

BWC Factor = 0.162972 dB

Location: -2, -2, 3.7 mm

### M866 With Battery WHCC CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 56.4

Measure Window Start: 0ms

Measure Window Length: 2000ms

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RHA1204-0013HAC02R3

Page 64 of 168

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -2, -2, 3.7 mm

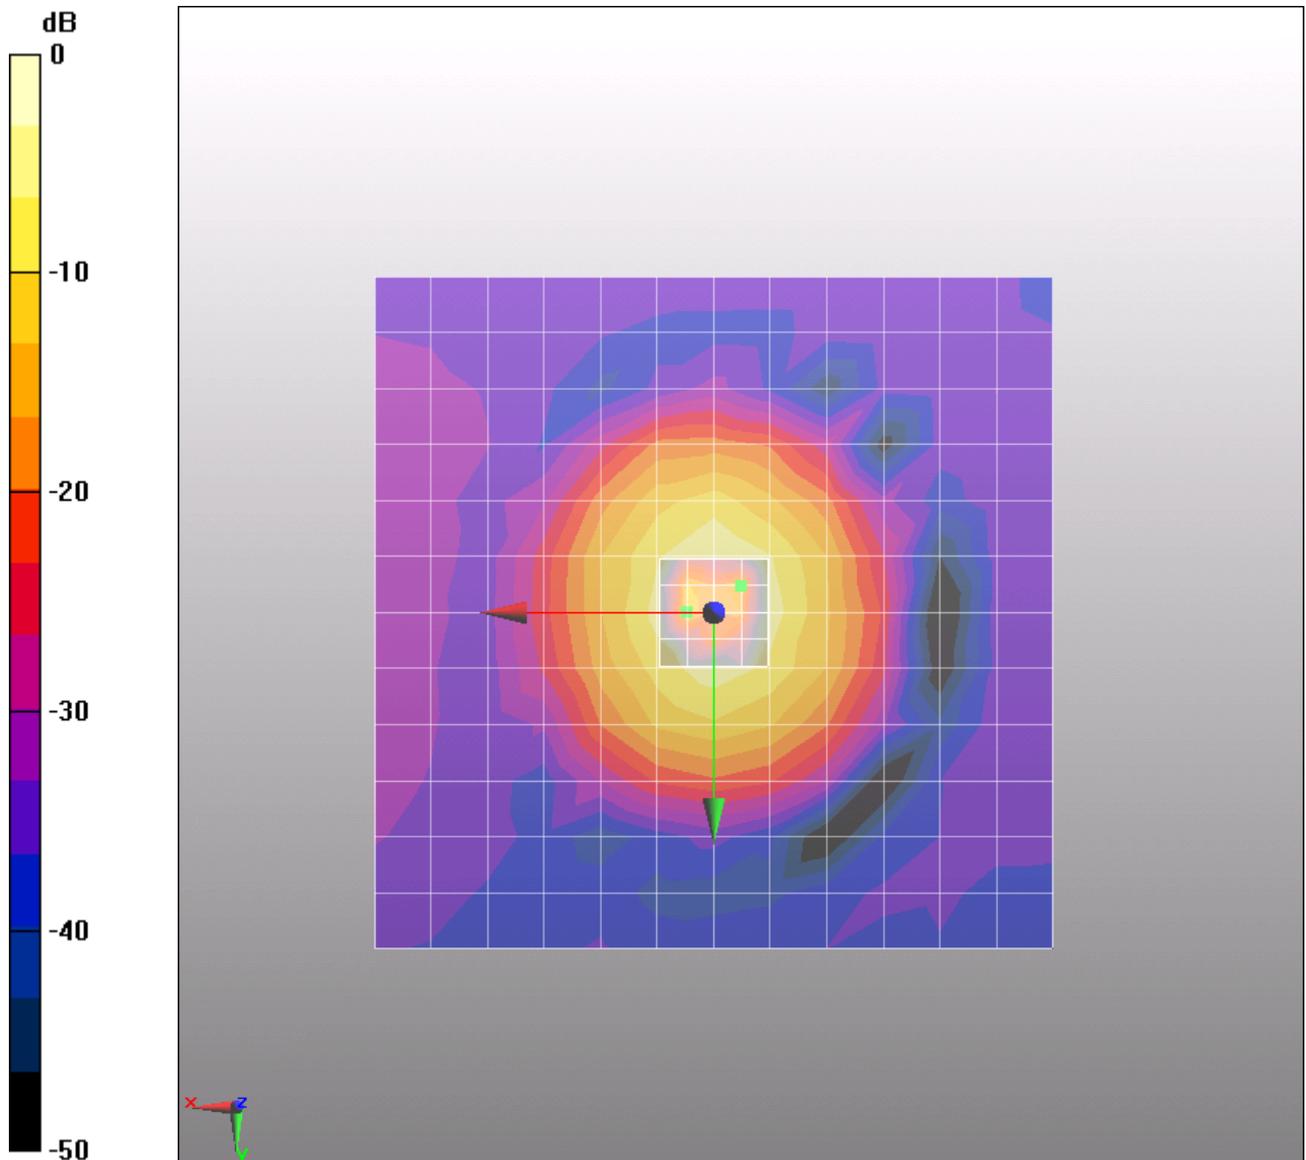

0 dB = 1A/m

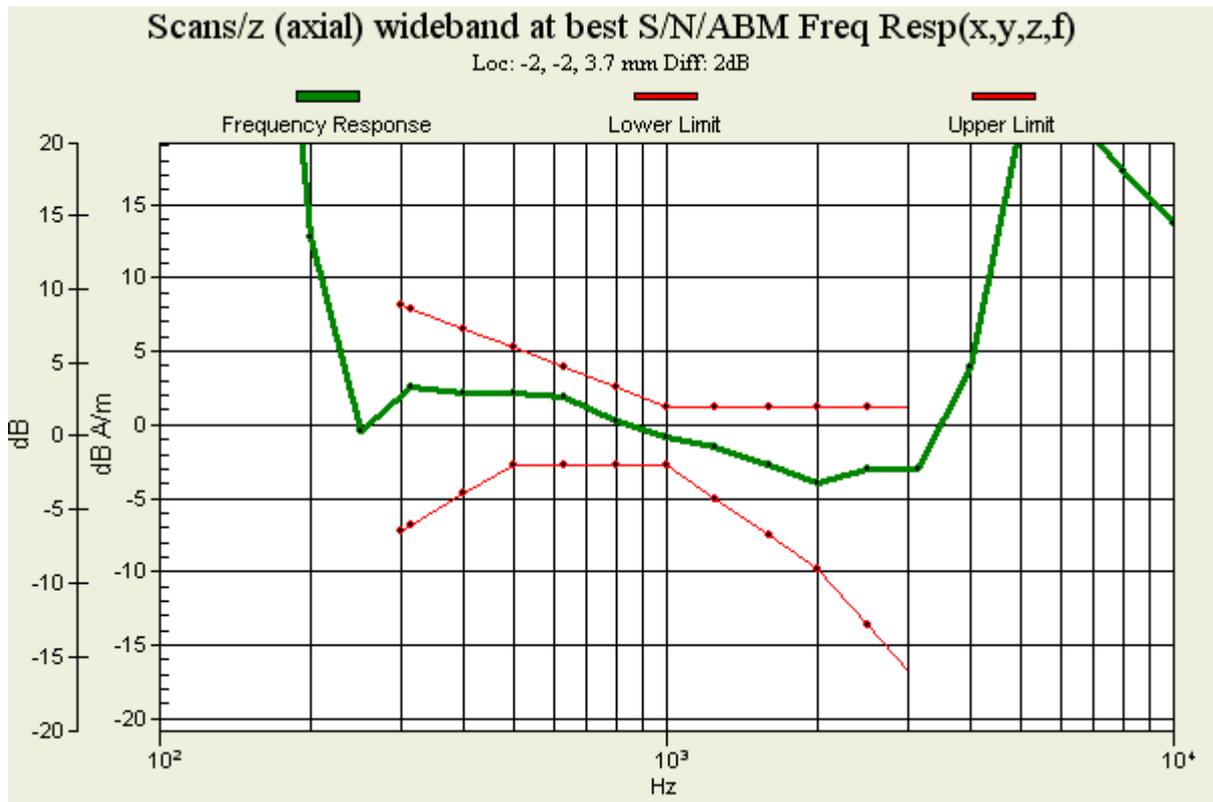


Figure 19 T-Coil CD T-Coil CDMA Cellular Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 66 of 168

**T-Coil CDMA Cellular X longitudinal (SN: MHCBB066I4437882)**

Date/Time: 5/9/2012 8:21:33 PM

Communication System: CDMA ; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery MHCBB CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/x (longitudinal)**

**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -10.1 dB A/m

BWC Factor = 0.162972 dB

Location: -8.3, 0, 3.7 mm

**M866 With Battery MHCBB CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/x (longitudinal)**

**fine 3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 67 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.01 dB A/m

BWC Factor = 0.162972 dB

Location: 6, 0, 3.7 mm

**M866 With Battery MHCBB CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/x (longitudinal)  
fine 3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 34.5 dB

ABM1 comp = -9.36 dB A/m

BWC Factor = 0.162972 dB

Location: -6, 0, 3.7 mm

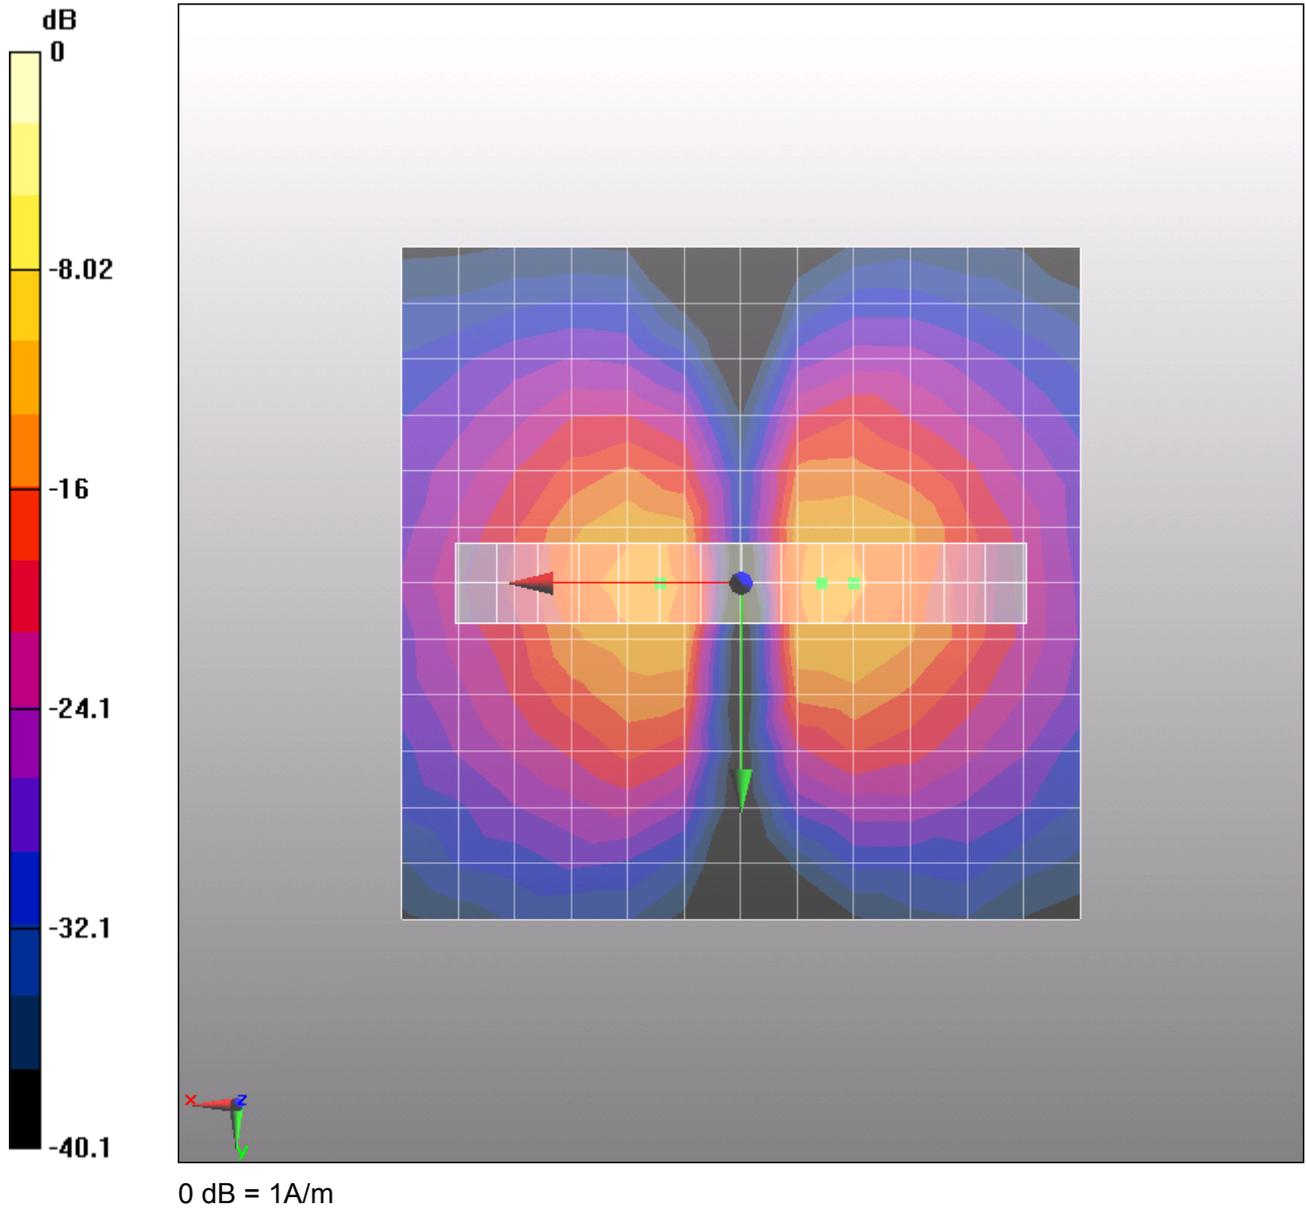


Figure 20 T-Coil CDMA Cellular X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 69 of 168

**T-Coil CDMA Cellular Y transversal (SN: MHCBB066I4437882)**

Date/Time: 5/9/2012 8:44:02 PM

Communication System: CDMA ; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery MHCBB CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/y (transversal)**

**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.81 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -8.3, 3.7 mm

**M866 With Battery MHCBB CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/y (transversal)**

**fine 3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 70 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

<b>Category</b>	<b>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</b>
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -10.2 dB A/m

BWC Factor = 0.162972 dB

Location: 3, -6, 3.7 mm

**M866 With Battery MHCBB CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

<b>Category</b>	<b>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</b>
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 41.3 dB

ABM1 comp = -10.7 dB A/m

BWC Factor = 0.162972 dB

Location: -3, -6, 3.7 mm

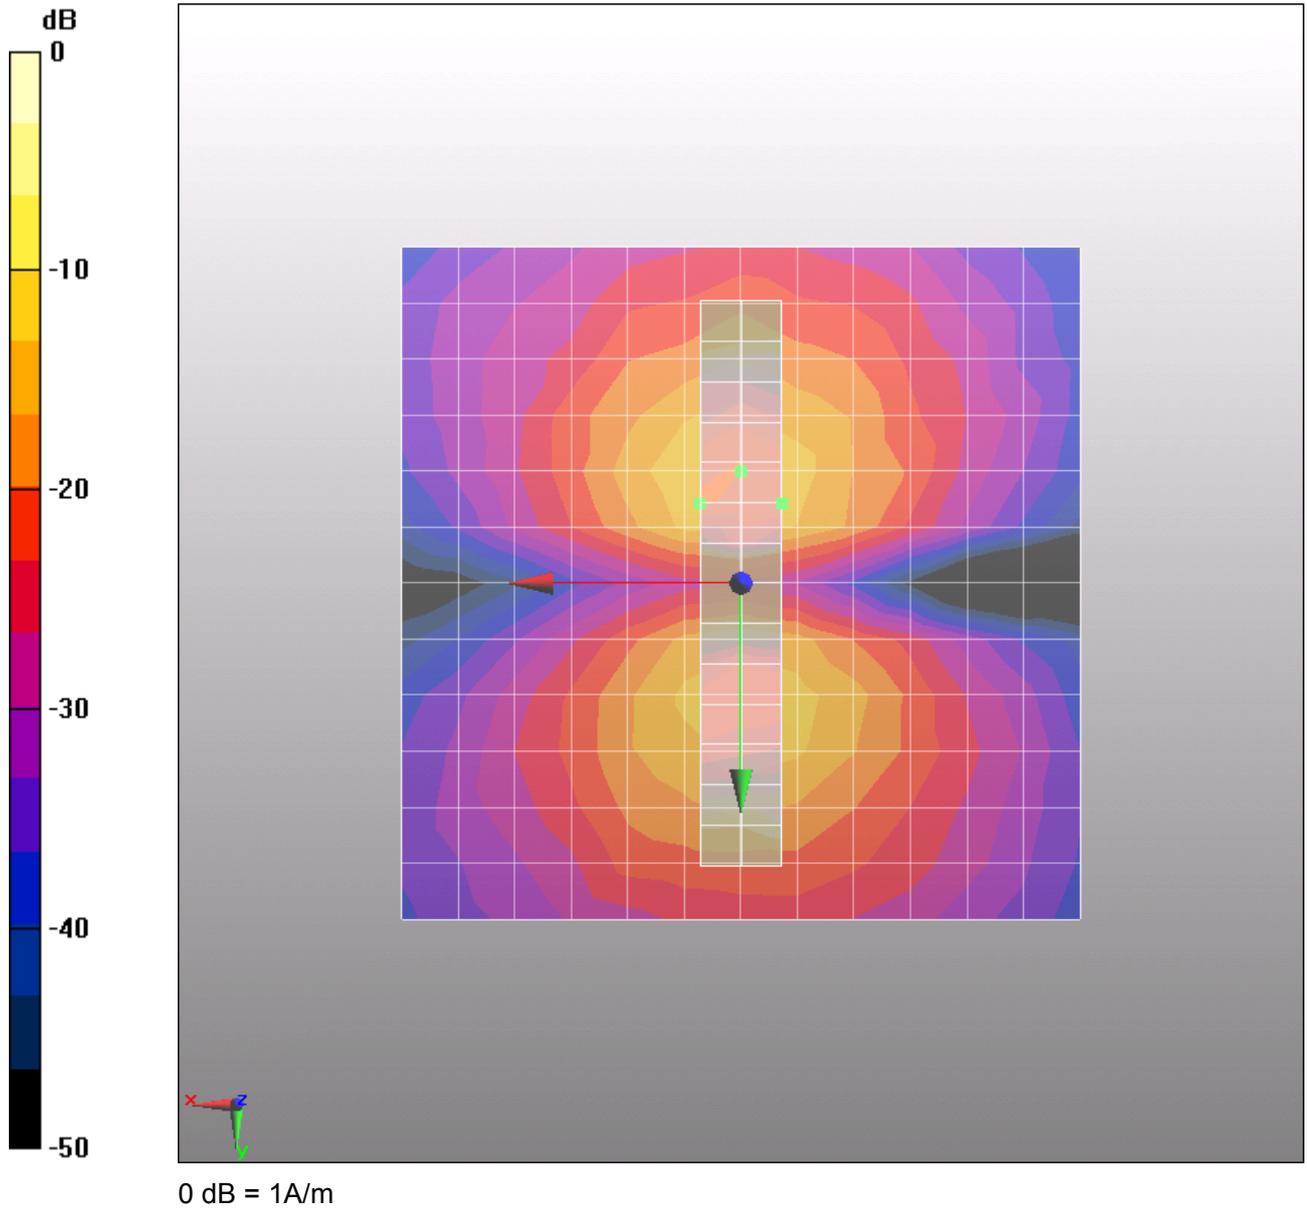


Figure 21 T-Coil CDMA Cellular Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 72 of 168

**T-Coil CDMA Cellular Z Axial (SN: MHCBB066I4437882)**

Date/Time: 5/9/2012 8:10:41 PM

Communication System: CDMA ; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery MHCBB CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -2.4 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

**M866 With Battery MHCBB CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) fine  
2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 73 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1 comp = -2 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

### M866 With Battery MHCBB CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM SNR(x,y,z) (5x5x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1/ABM2 = 37.1 dB

ABM1 comp = -3.17 dB A/m

BWC Factor = 0.162972 dB

Location: -4, 0, 3.7 mm

### M866 With Battery MHCBB CDMA Cellular HAC\_T-Coil\_WD\_Emission/Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 56.4

Measure Window Start: 0ms

Measure Window Length: 2000ms

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RHA1204-0013HAC02R3

Page 74 of 168

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -4, 0, 3.7 mm

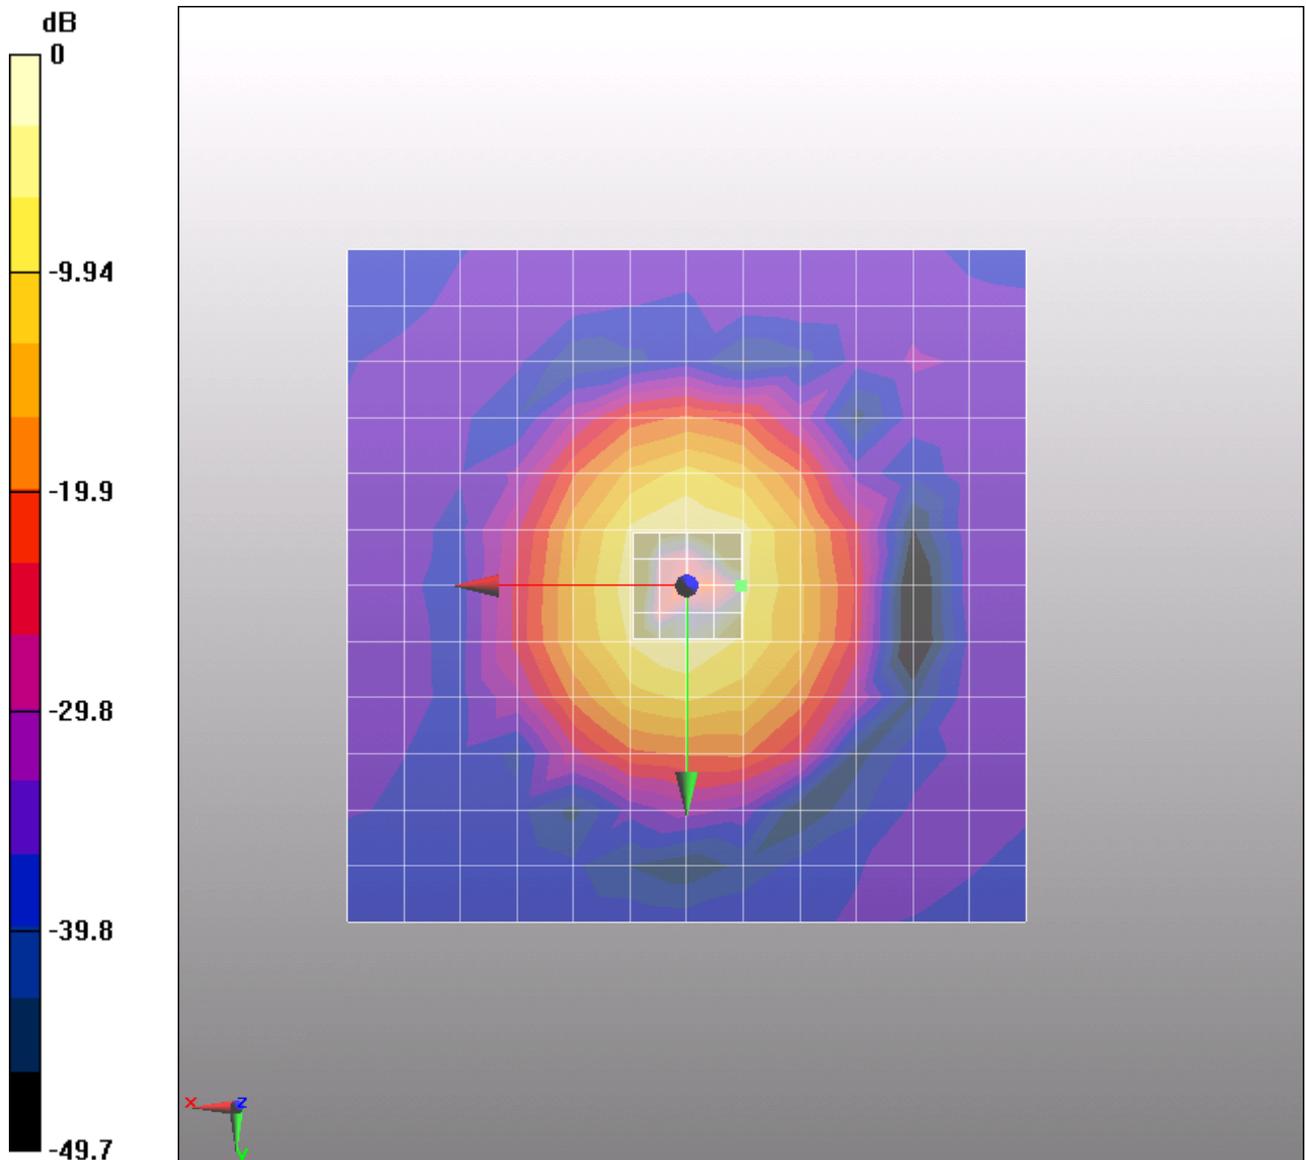

0 dB = 1A/m

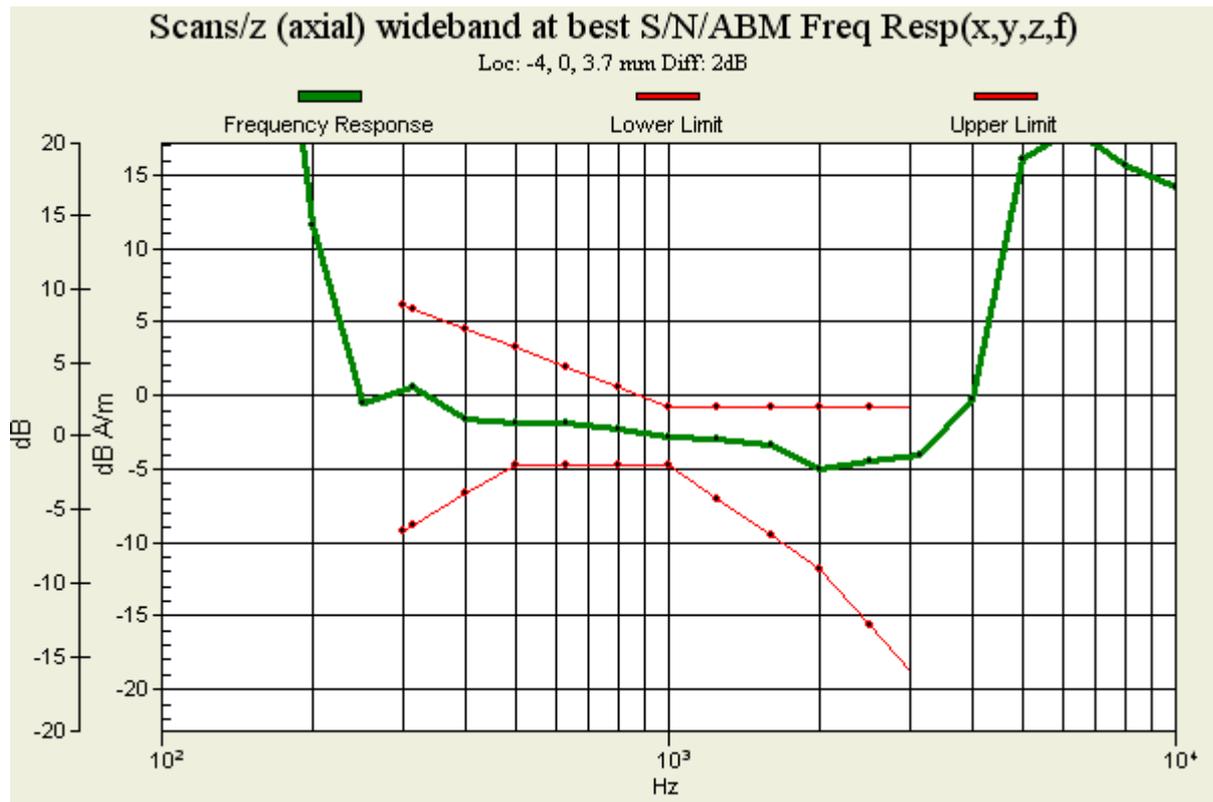


Figure 22 T-Coil CD T-Coil CDMA Cellular Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 76 of 168

**T-Coil CDMA PCS X longitudinal (SN: UAIBC16X03002980)**

Date/Time: 5/9/2012 10:11:58 PM

Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UAIBC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.44 dB A/m

BWC Factor = 0.162972 dB

Location: 8.3, 0, 3.7 mm

**M866 With Battery UAIBC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine  
3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 77 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -8.68 dB A/m

BWC Factor = 0.162972 dB

Location: -6, -3, 3.7 mm

**M866 With Battery UAIBC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine  
3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 33.5 dB

ABM1 comp = -9.53 dB A/m

BWC Factor = 0.162972 dB

Location: -6, 3, 3.7 mm

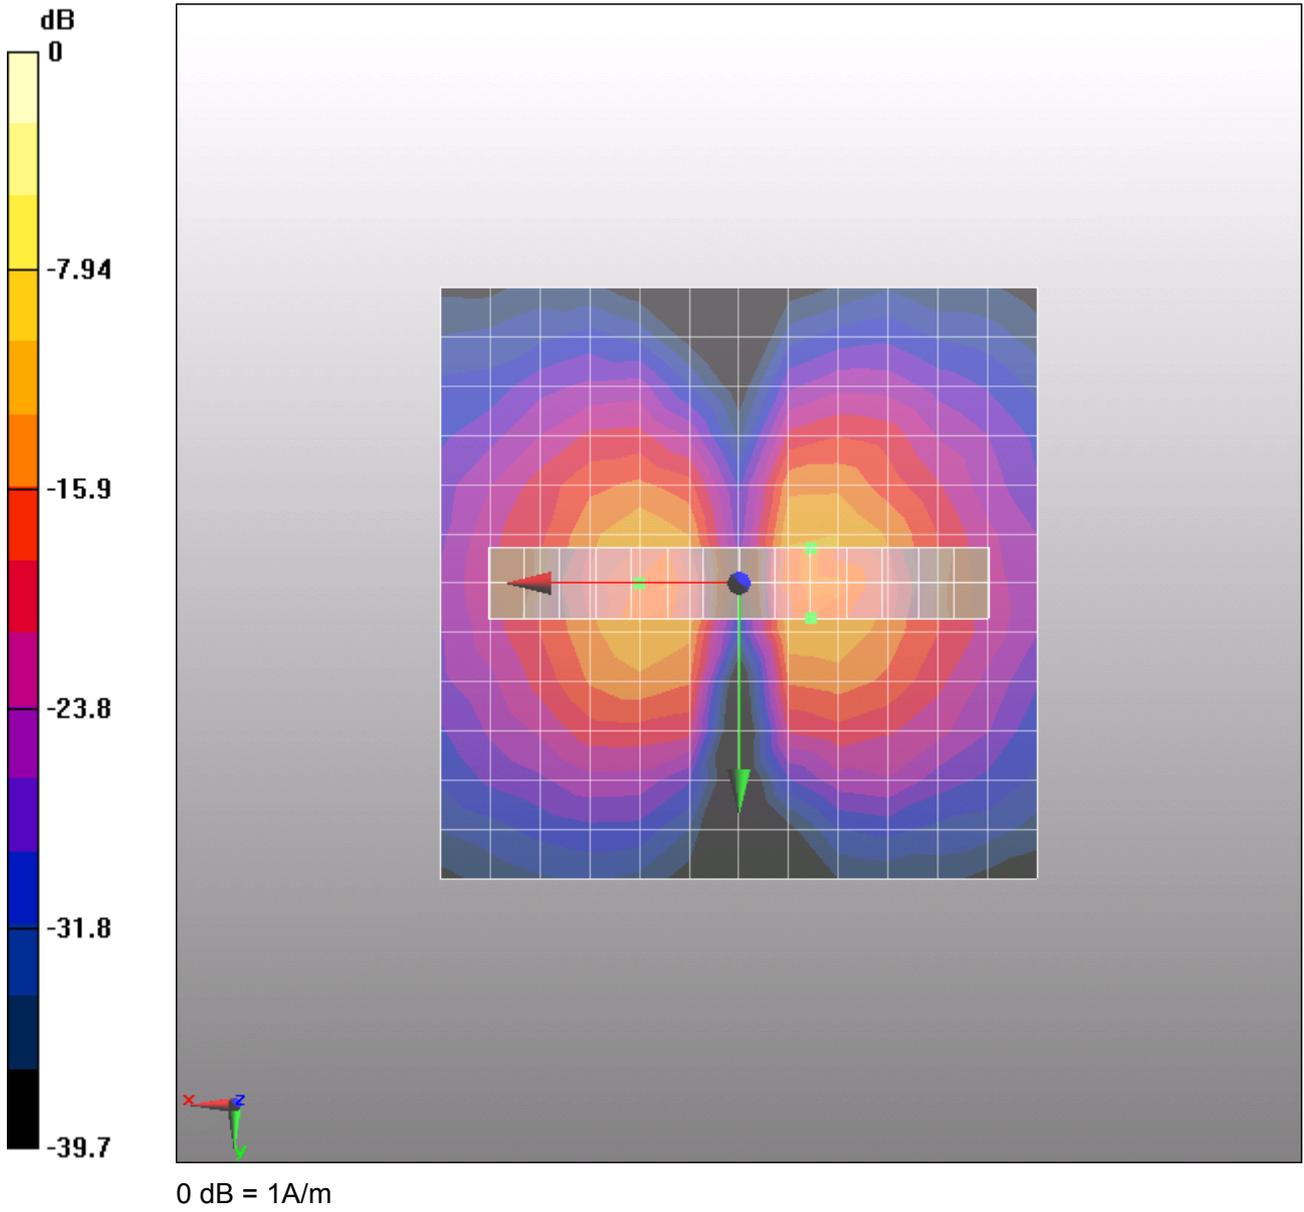


Figure 23 T-Coil CDMA PCS X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 79 of 168

**T-Coil CDMA PCS Y transversal (SN: UAIBC16X03002980)**

Date/Time: 5/9/2012 10:23:44 PM

Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UAIBC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.13 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -8.3, 3.7 mm

**M866 With Battery UAIBC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine  
3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 80 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.91 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -6, 3.7 mm

**M866 With Battery UAIBC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine  
3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 40.2 dB

ABM1 comp = -10.7 dB A/m

BWC Factor = 0.162972 dB

Location: 3, -6, 3.7 mm

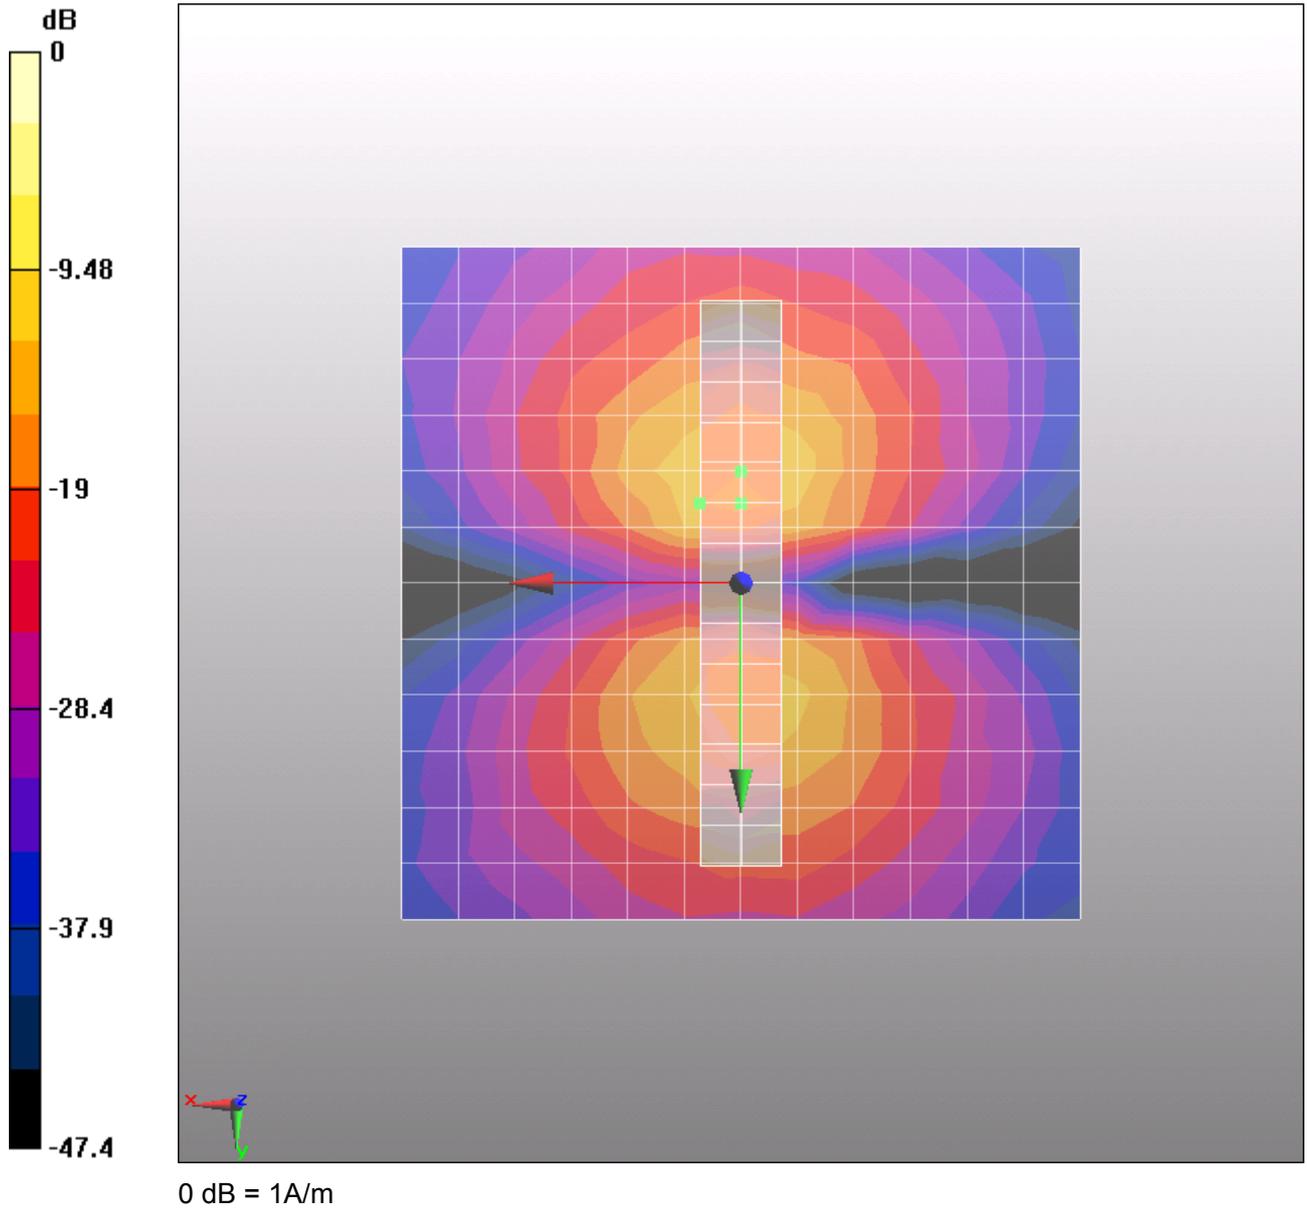


Figure 24 T-Coil CDMA PCS Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 82 of 168

**T-Coil CDMA PCS Z Axial (SN: UAIBC16X03002980)**

Date/Time: 5/9/2012 10:01:03 PM

Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UAIBC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -1.68 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

**M866 With Battery UAIBC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 83 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1 comp = -2.41 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 2, 3.7 mm

### M866 With Battery UAIBC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM SNR(x,y,z) (5x5x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1/ABM2 = 35.3 dB

ABM1 comp = -2.53 dB A/m

BWC Factor = 0.162972 dB

Location: -2, 0, 3.7 mm

### M866 With Battery UAIBC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 56.4

Measure Window Start: 0ms

Measure Window Length: 2000ms

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RHA1204-0013HAC02R3

Page 84 of 168

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -2, 0, 3.7 mm

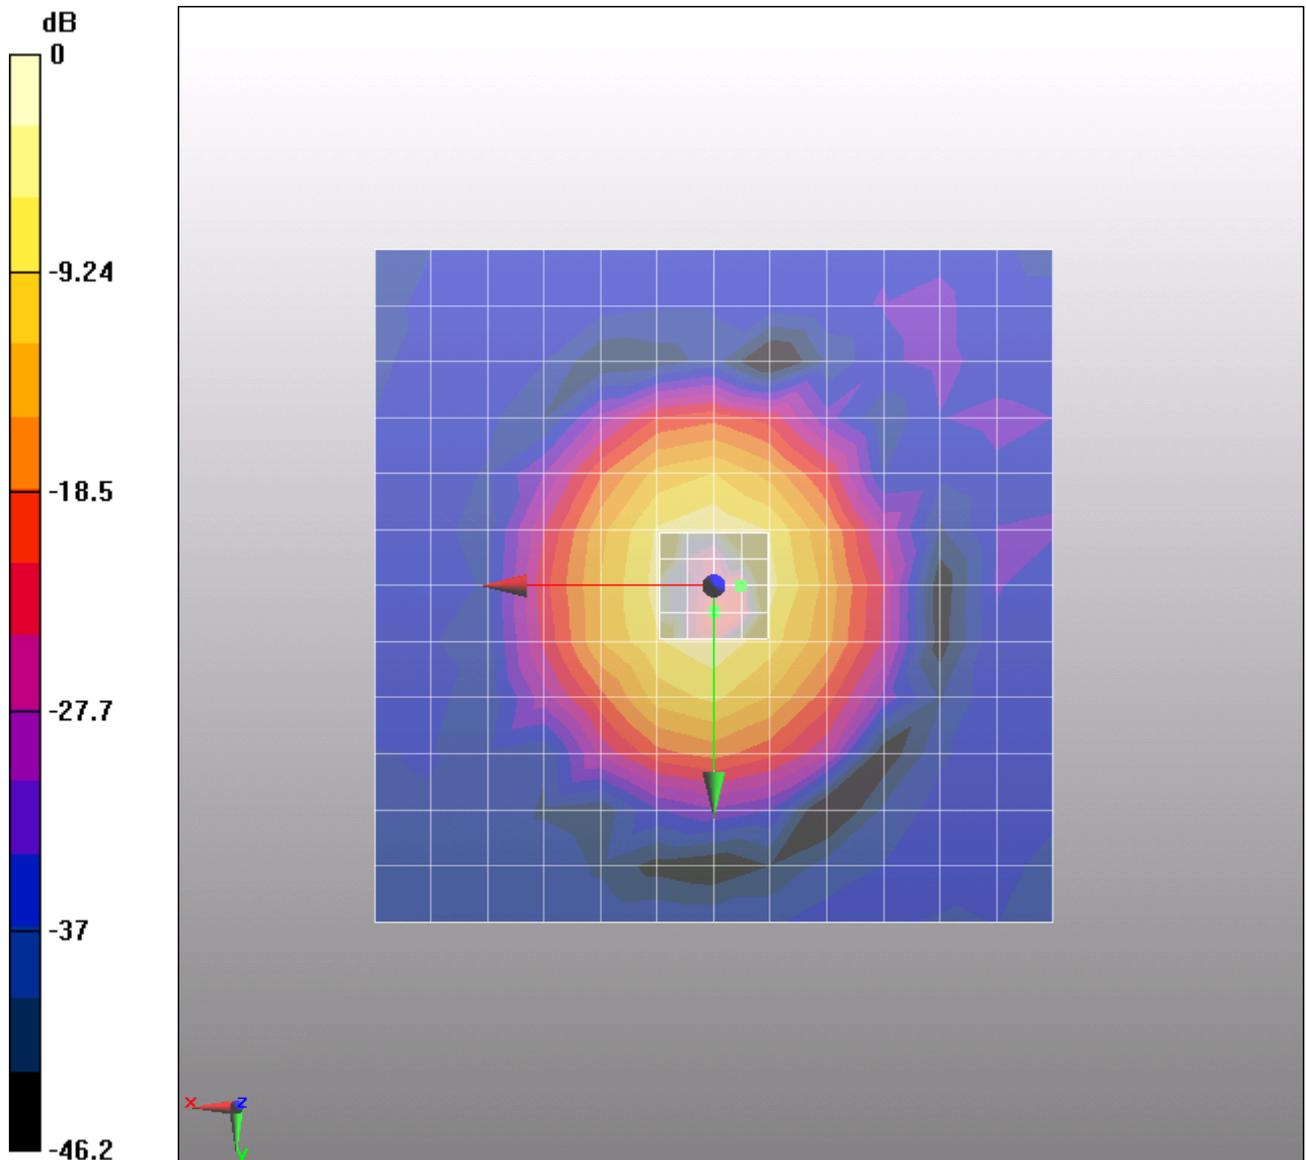

0 dB = 1A/m

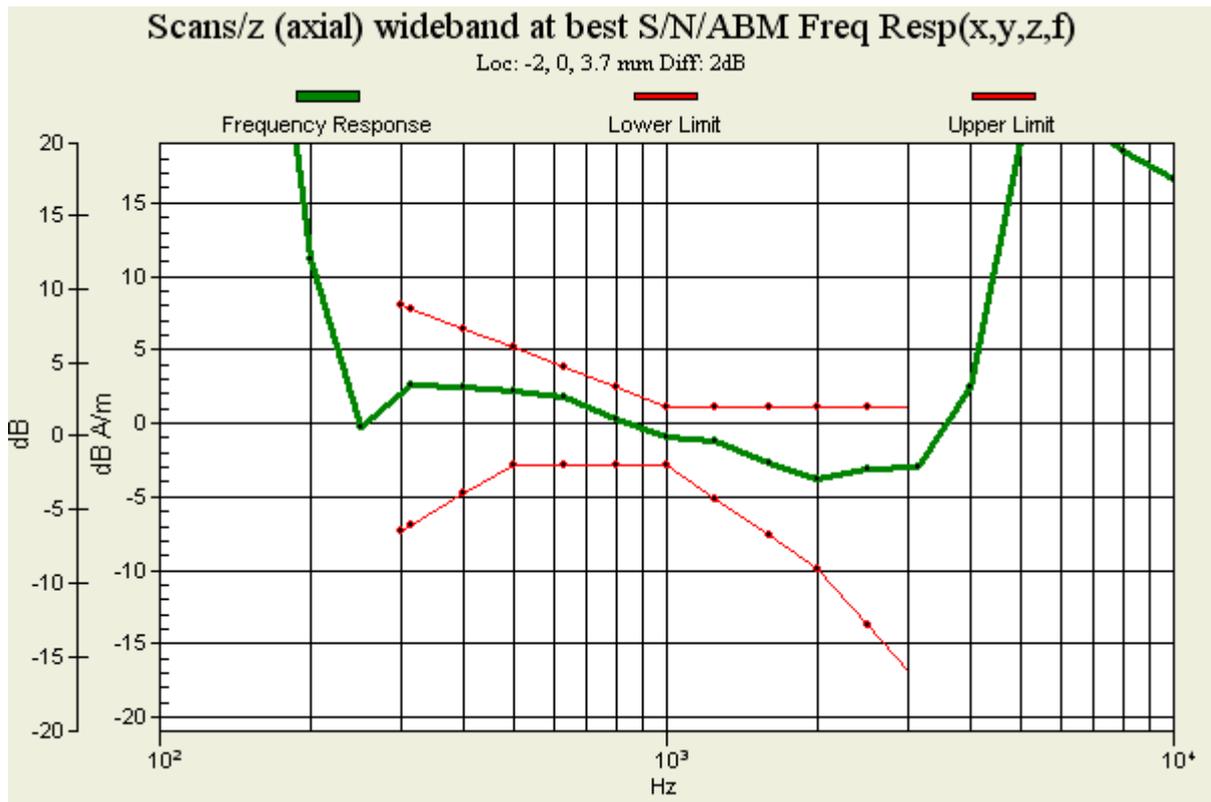


Figure 25 T-Coil CDMA PCS Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 86 of 168

**T-Coil CDMA PCS X longitudinal (SN: UNDC306X03000327)**

Date/Time: 5/9/2012 10:50:06 PM

Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UNDC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.04 dB A/m

BWC Factor = 0.162972 dB

Location: -8.3, 0, 3.7 mm

**M866 With Battery UNDC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine  
3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 87 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -8.65 dB A/m

BWC Factor = 0.162972 dB

Location: -6, 0, 3.7 mm

**M866 With Battery UNDC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine  
3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 30.4 dB

ABM1 comp = -8.65 dB A/m

BWC Factor = 0.162972 dB

Location: -6, 0, 3.7 mm

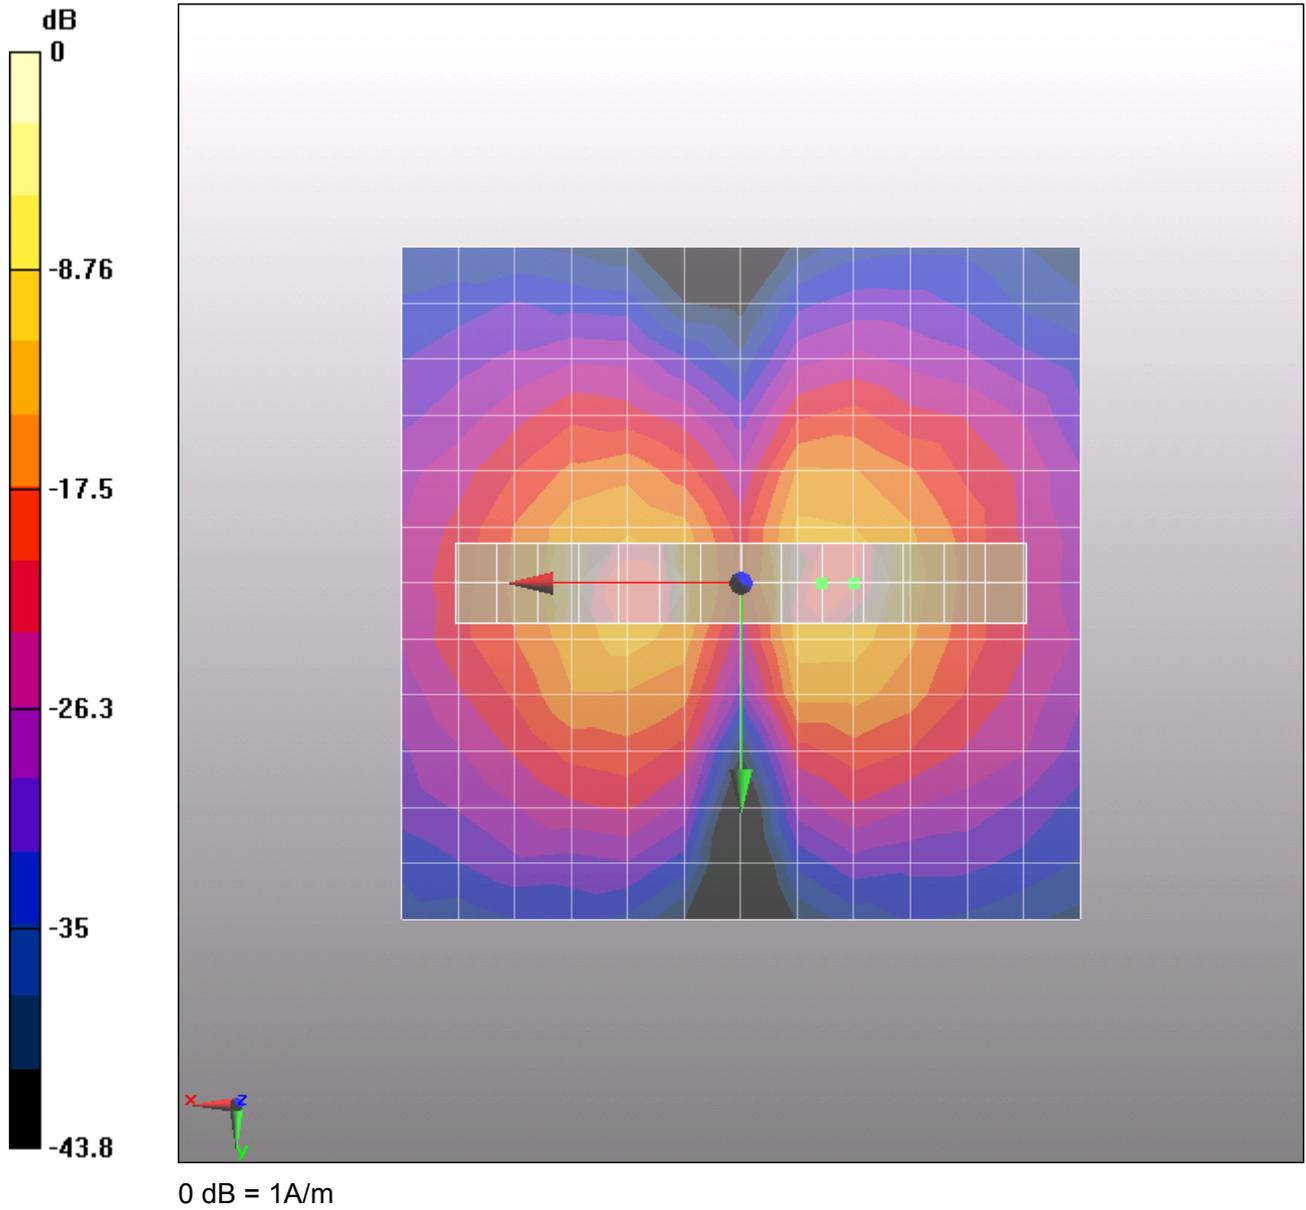


Figure 26 T-Coil CDMA PCS X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 89 of 168

**T-Coil CDMA PCS Y transversal (SN: UNDC306X03000327)**

Date/Time: 5/9/2012 11:01:51 PM

Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UNDC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.93 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -8.3, 3.7 mm

**M866 With Battery UNDC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine  
3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 90 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

<b>Category</b>	<b>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</b>
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.54 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -9, 3.7 mm

**M866 With Battery UNDC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine  
3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

<b>Category</b>	<b>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</b>
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 40.1 dB

ABM1 comp = -9.89 dB A/m

BWC Factor = 0.162972 dB

Location: 3, -6, 3.7 mm

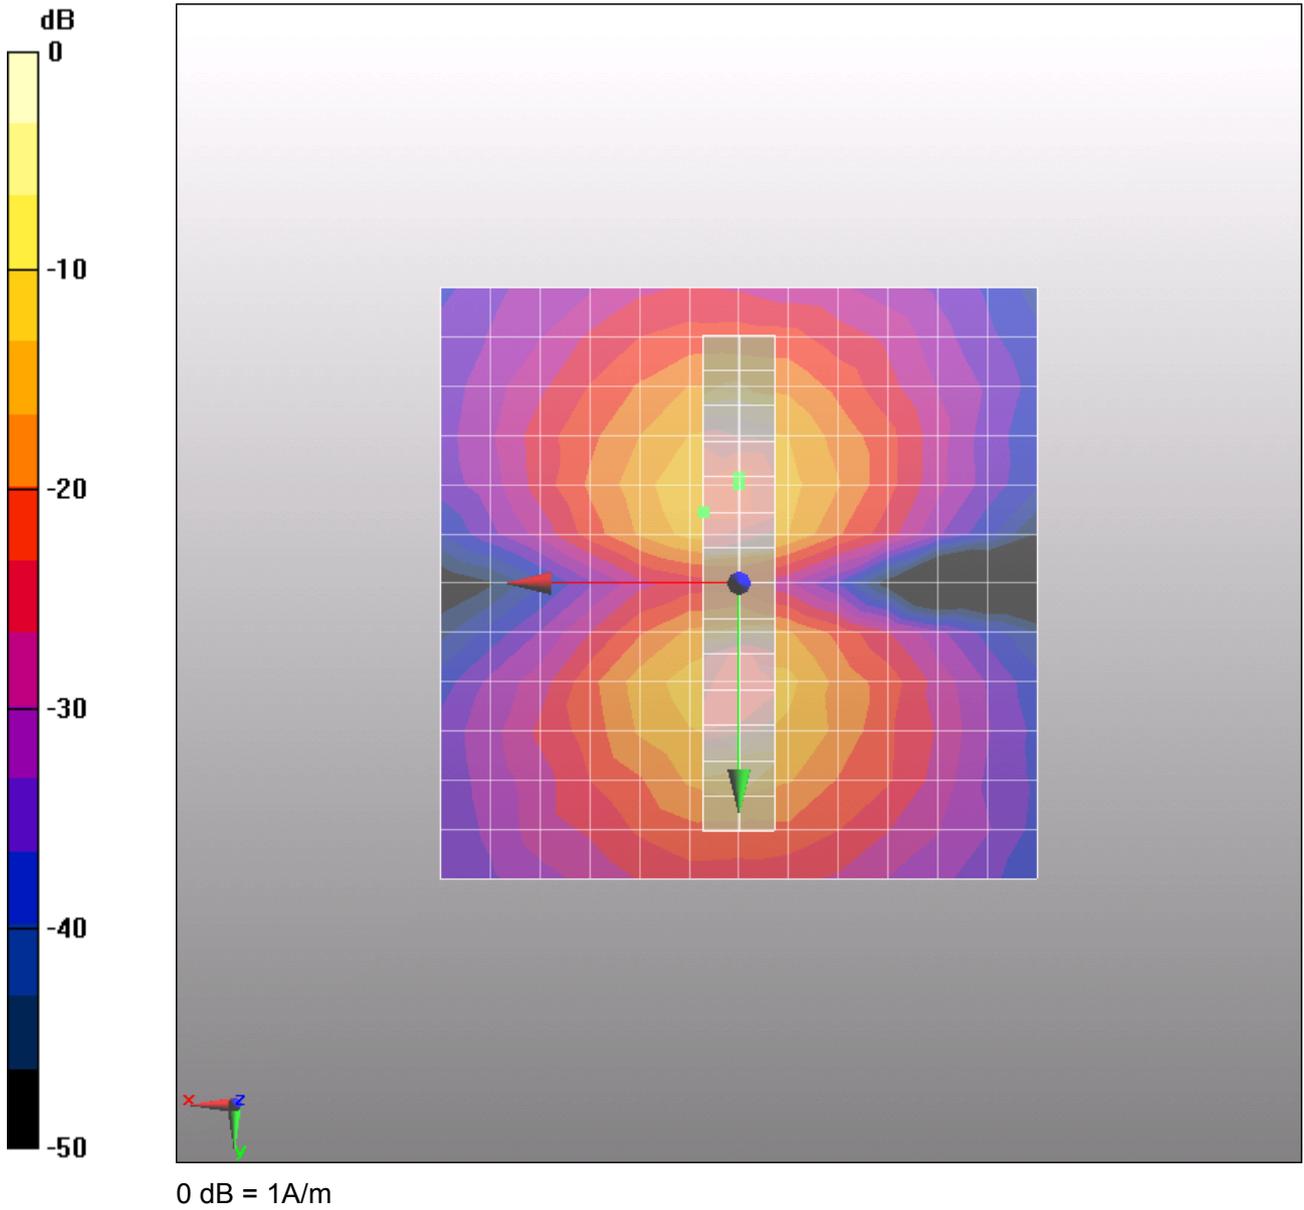


Figure 27 T-Coil CDMA PCS Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 92 of 168

**T-Coil CDMA PCS Z Axial (SN: UNDC306X03000327)**

Date/Time: 5/9/2012 10:38:14 PM

Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UNDC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -2.39 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

**M866 With Battery UNDC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 93 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1 comp = -1.93 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

### M866 With Battery UNDC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM SNR(x,y,z) (5x5x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1/ABM2 = 35 dB

ABM1 comp = -2.18 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 4, 3.7 mm

### M866 With Battery UNDC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 56.4

Measure Window Start: 0ms

Measure Window Length: 2000ms

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RHA1204-0013HAC02R3

Page 94 of 168

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

Diff = 1.93 dB

BWC Factor = 10.8 dB

Location: 0, 4, 3.7 mm

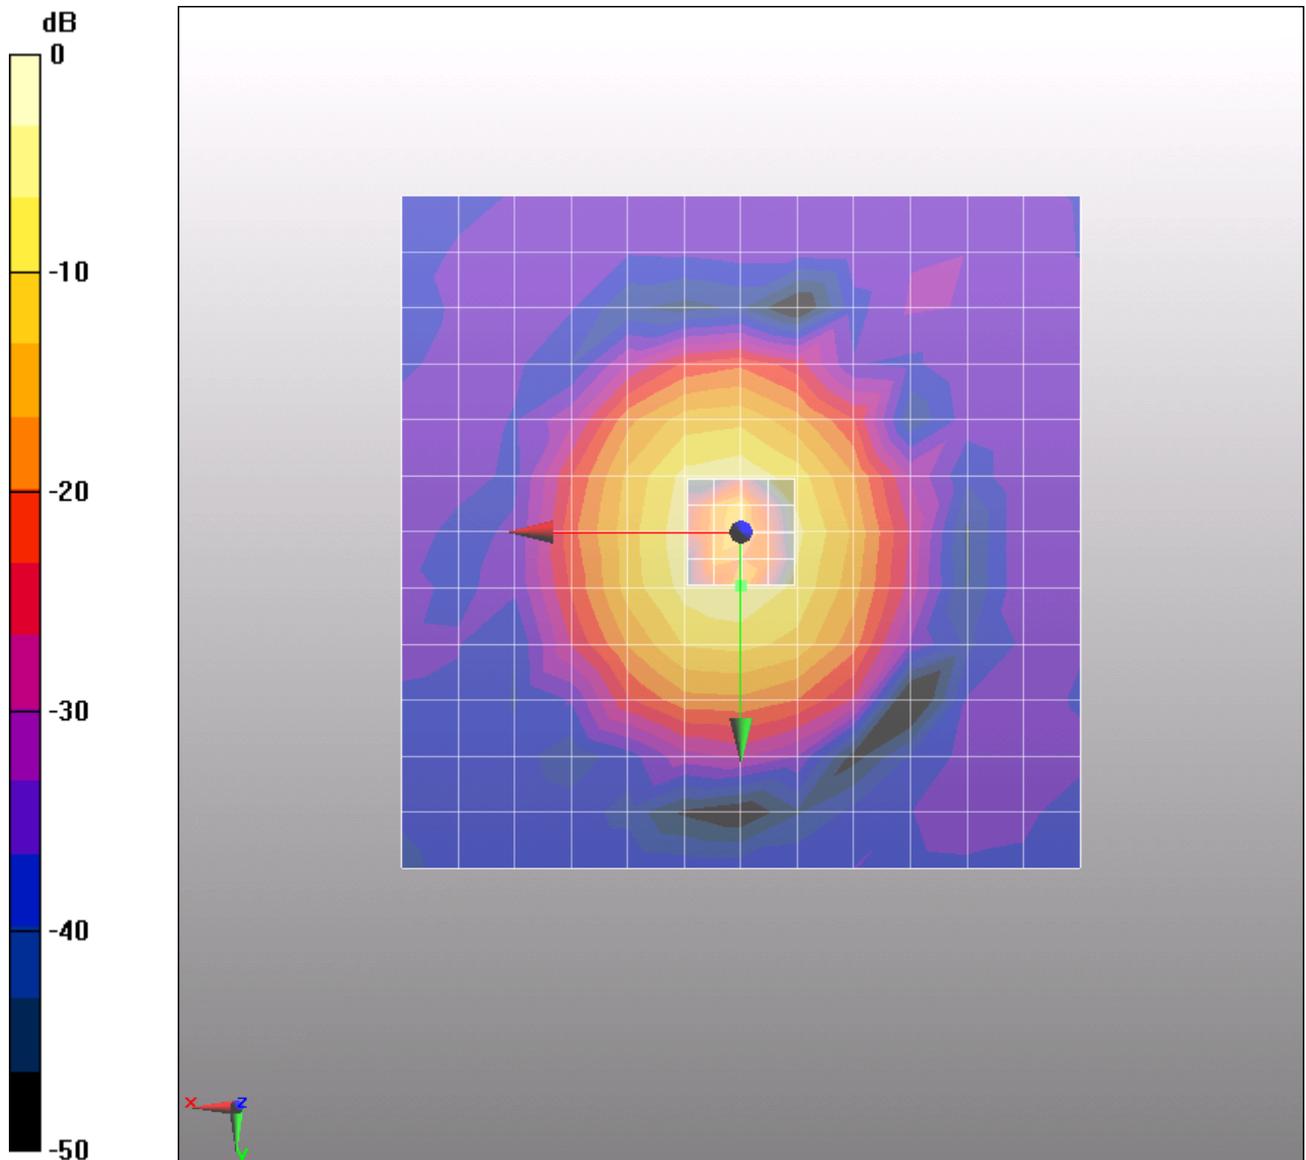

0 dB = 1A/m

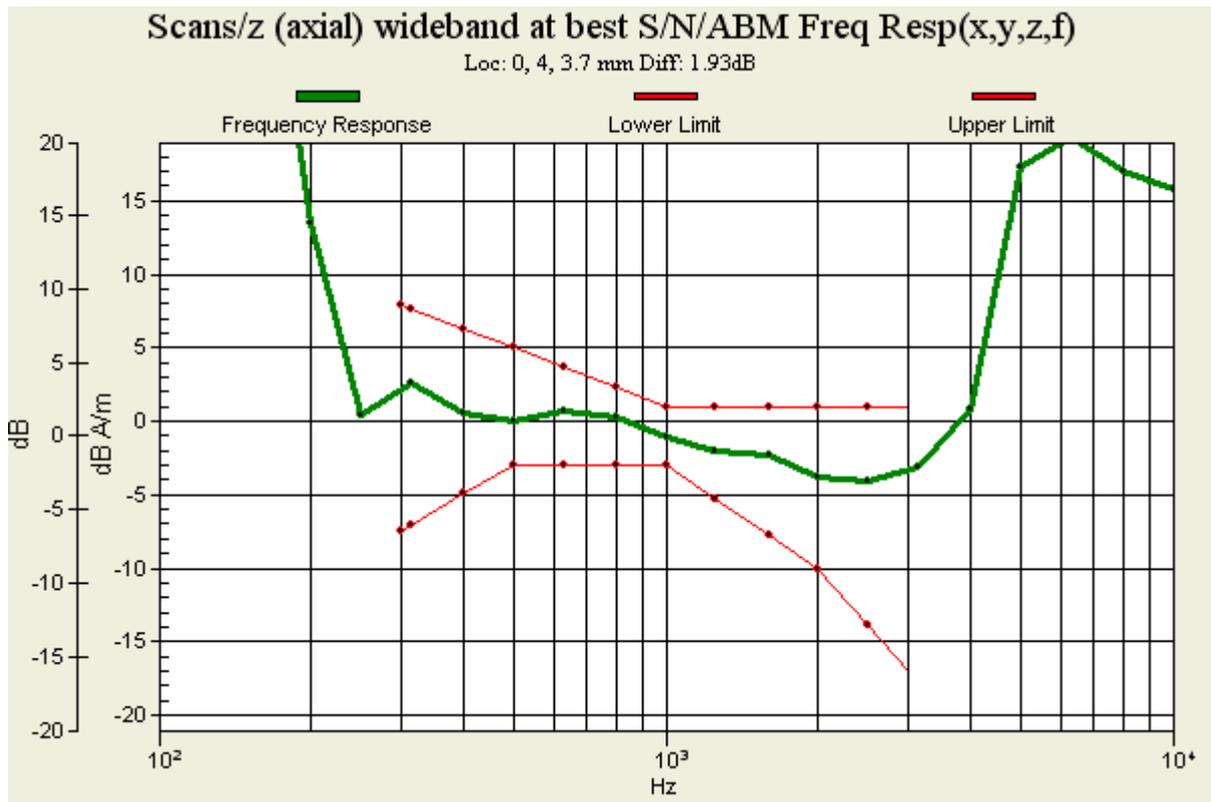


Figure 28 T-Coil CDMA PCS Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 96 of 168

**T-Coil CDMA PCS X longitudinal (SN: WHCC115691073294)**

Date/Time: 5/9/2012 11:25:38 PM

Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery WHCC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.4 dB A/m

BWC Factor = 0.162972 dB

Location: -8.3, 0, 3.7 mm

**M866 With Battery WHCC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine  
3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 97 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -8.91 dB A/m

BWC Factor = 0.162972 dB

Location: -6, 3, 3.7 mm

**M866 With Battery WHCC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine  
3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB


**Cursor:**

ABM1/ABM2 = 29.4 dB

ABM1 comp = -8.91 dB A/m

BWC Factor = 0.162972 dB

Location: -6, 3, 3.7 mm

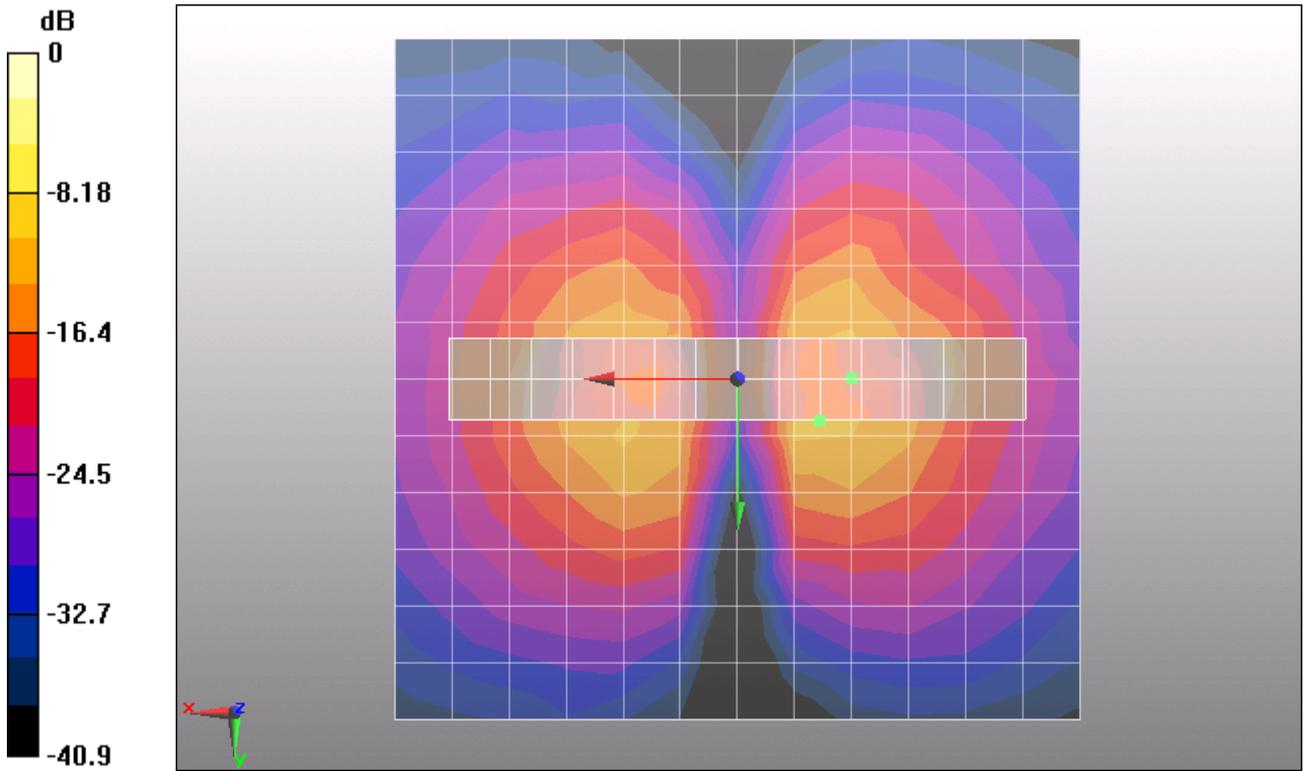

0 dB = 1A/m

Figure 29 T-Coil CDMA PCS X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 99 of 168

**T-Coil CDMA PCS Y transversal (SN: WHCC115691073294)**

Date/Time: 5/9/2012 11:37:27 PM

Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery WHCC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.35 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -8.3, 3.7 mm

**M866 With Battery WHCC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine  
3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 100 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.56 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -9, 3.7 mm

**M866 With Battery WHCC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine  
3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 40.1 dB

ABM1 comp = -10.1 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -6, 3.7 mm

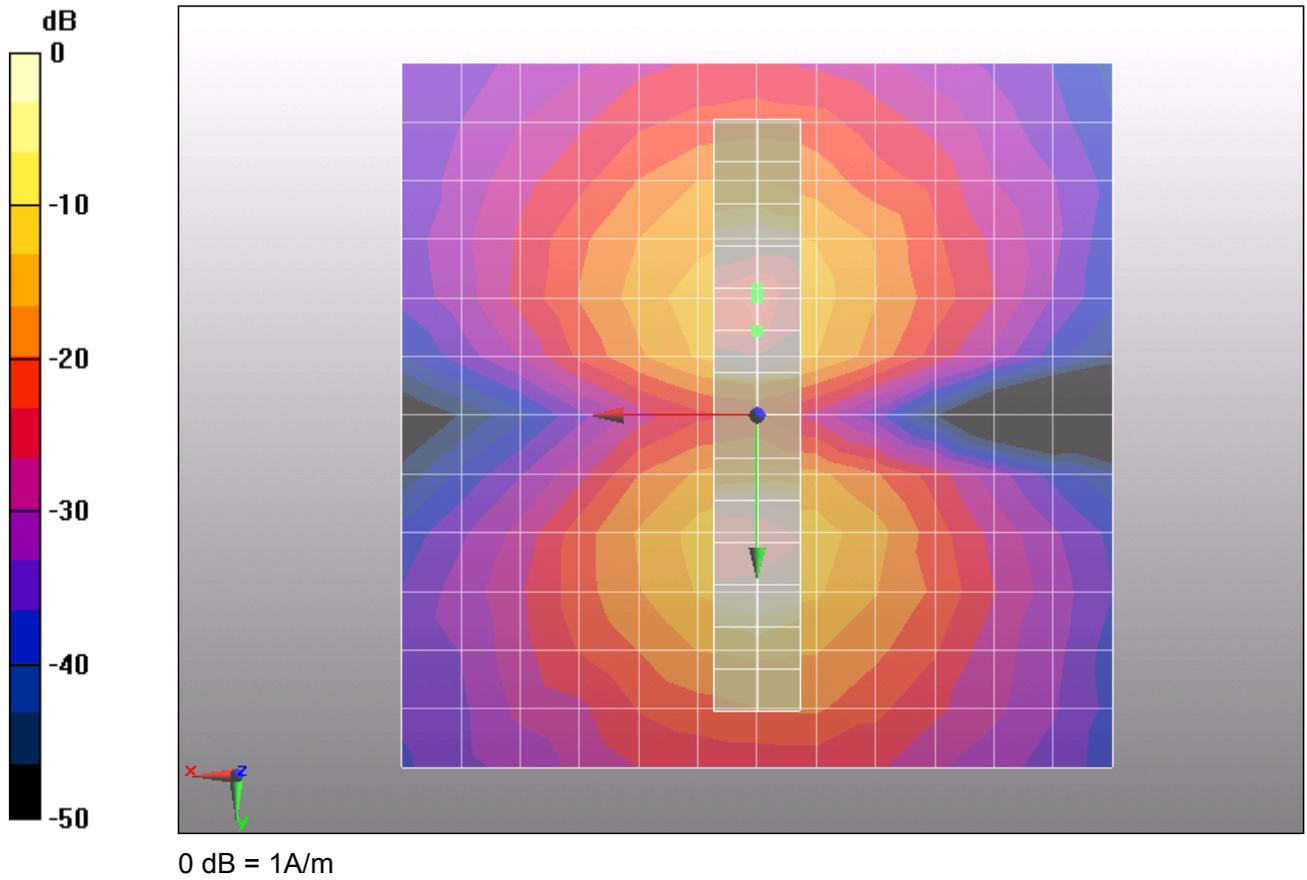


Figure 30 T-Coil CDMA PCS Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 102 of 168

**T-Coil CDMA PCS Z Axial (SN: WHCC115691073294)**

Date/Time: 5/9/2012 11:15:11 PM

Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery WHCC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -1.61 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

**M866 With Battery WHCC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 103 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1 comp = -1.05 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

### M866 With Battery WHCC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM SNR(x,y,z) (5x5x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1/ABM2 = 34.7 dB

ABM1 comp = -1.05 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

### M866 With Battery WHCC CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 56.4

Measure Window Start: 0ms

Measure Window Length: 2000ms

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RHA1204-0013HAC02R3

Page 104 of 168

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

Diff = 1.98 dB

BWC Factor = 10.8 dB

Location: 0, 0, 3.7 mm

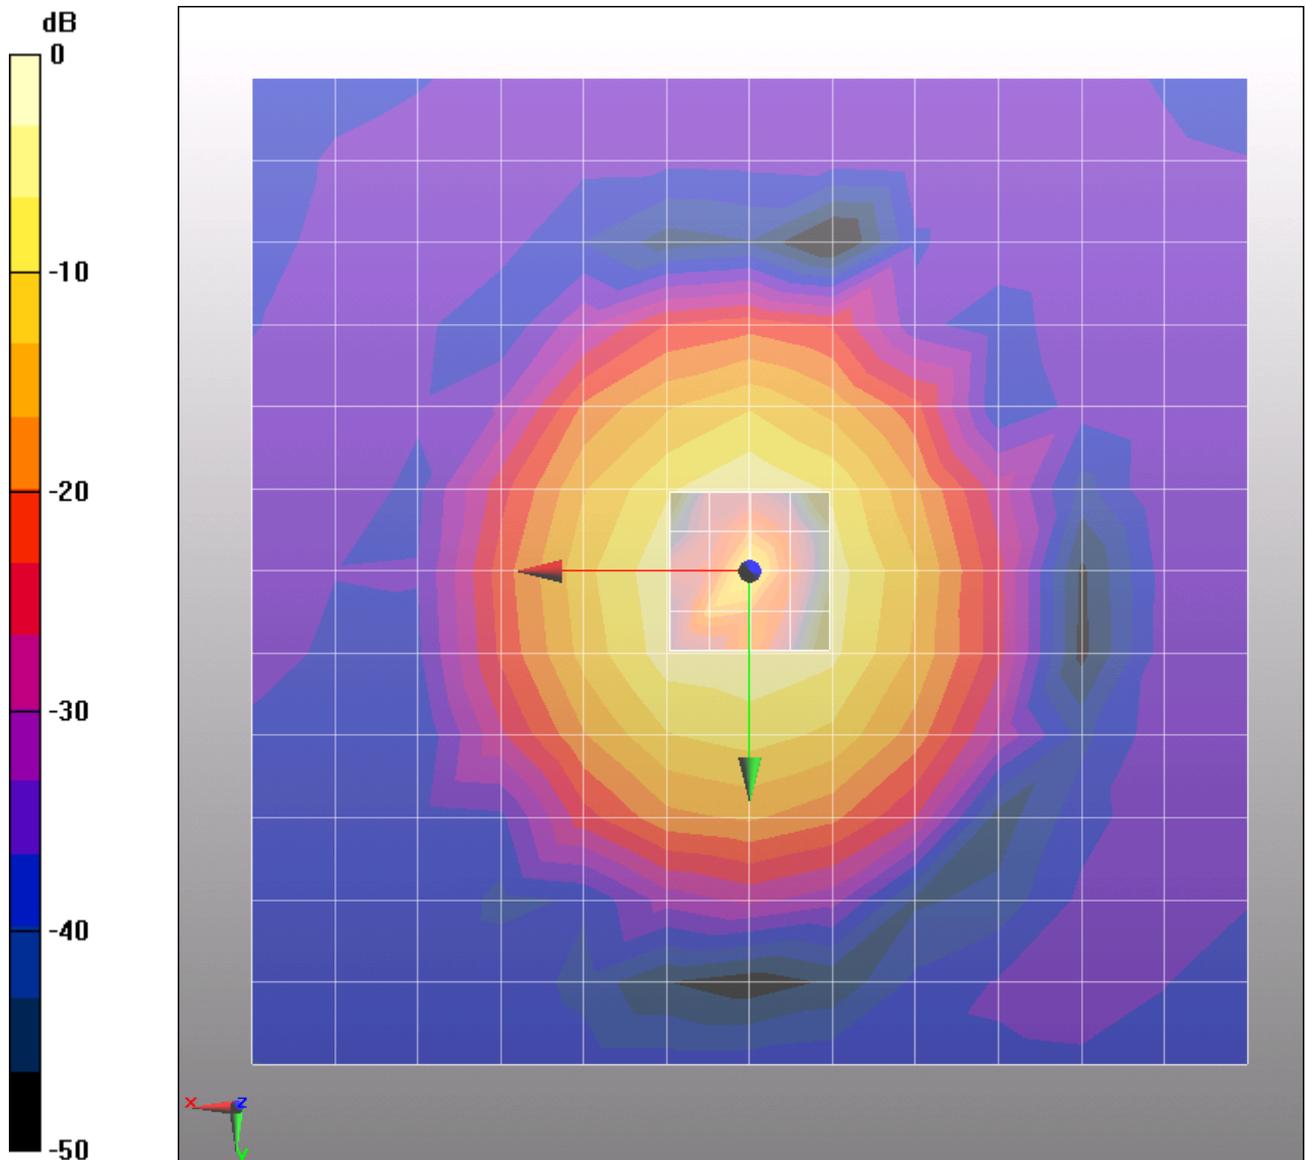

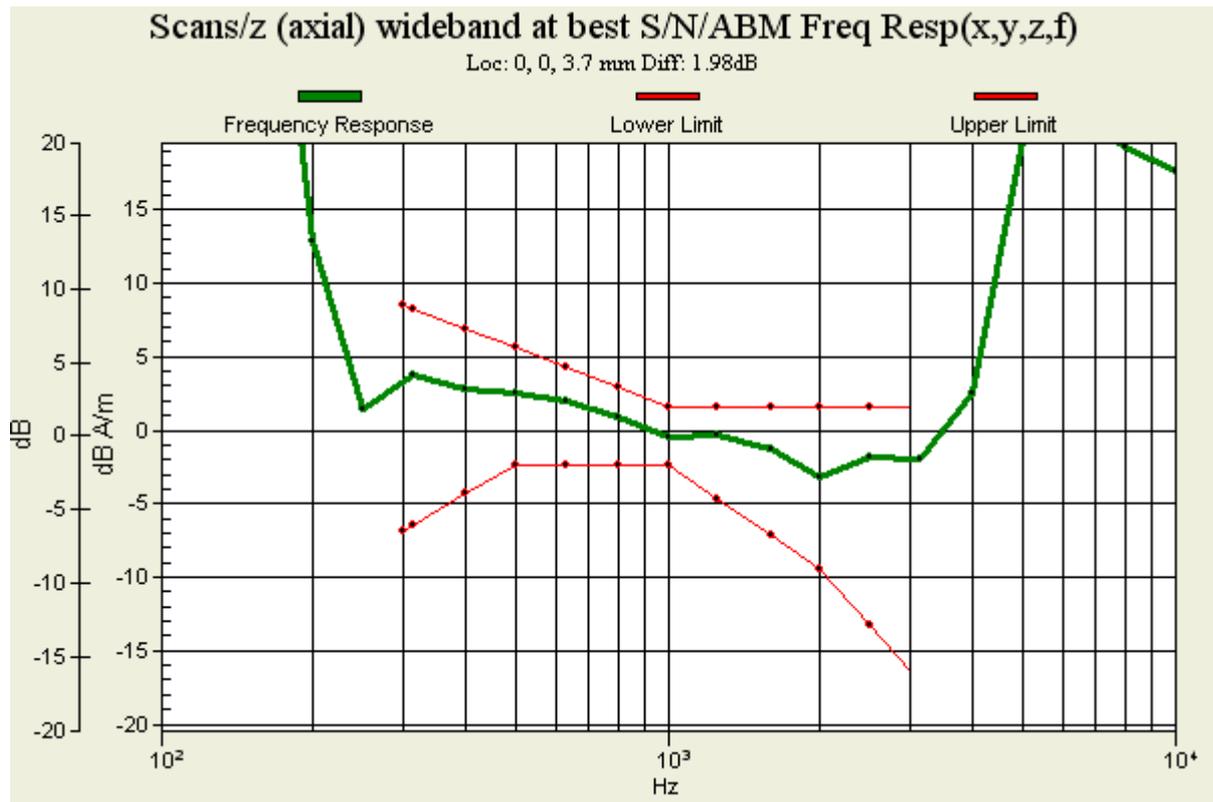


Figure 31 T-Coil CDMA PCS Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 106 of 168

**T-Coil CDMA PCS X longitudinal (SN: MHCBB066I4437882)**

Date/Time: 5/9/2012 9:34:38 PM

Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery MHCBB CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)**

**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -8.81 dB A/m

BWC Factor = 0.162972 dB

Location: -8.3, 0, 3.7 mm

**M866 With Battery MHCBB CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine**

**3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 107 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

<b>Category</b>	<b>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</b>
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -8.09 dB A/m

BWC Factor = 0.162972 dB

Location: -6, -1.2, 3.7 mm

**M866 With Battery MHCBB CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine  
3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

<b>Category</b>	<b>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</b>
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 31.7 dB

ABM1 comp = -8.09 dB A/m

BWC Factor = 0.162972 dB

Location: -6, -1.2, 3.7 mm

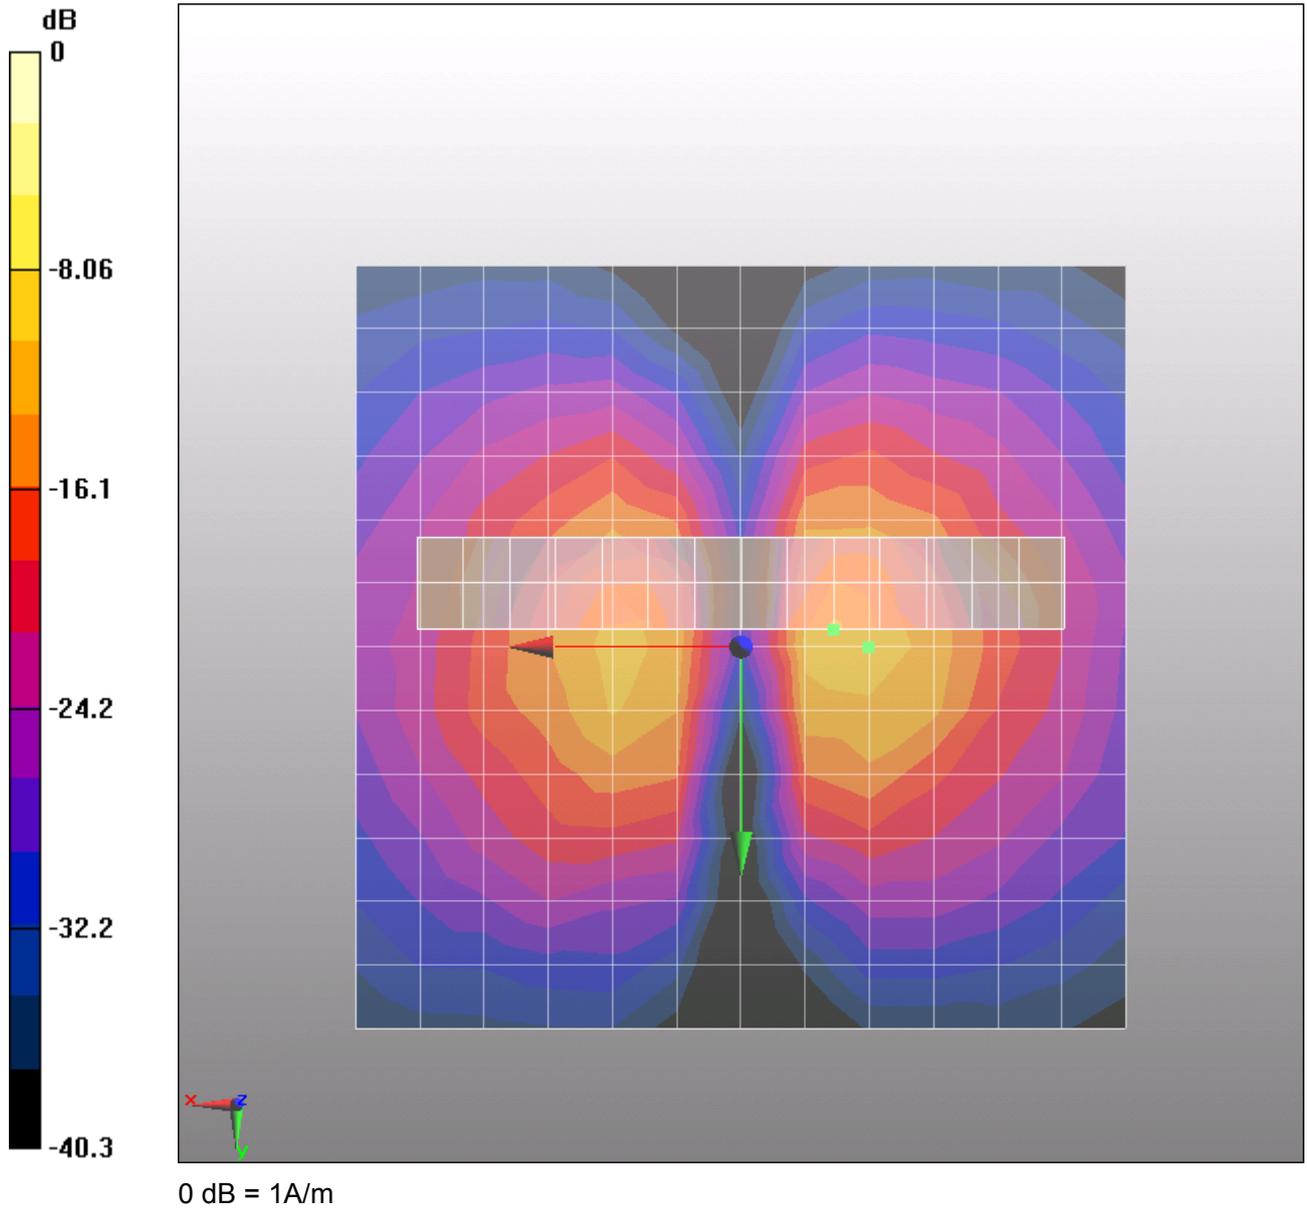


Figure 32 T-Coil CDMA PCS X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 109 of 168

**T-Coil CDMA PCS Y transversal (SN: MHCBB066I4437882)**

Date/Time: 5/9/2012 9:46:17 PM

Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery MHCBB CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/y (transversal)**

**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -10.2 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 8.3, 3.7 mm

**M866 With Battery MHCBB CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine**

**3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 110 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -10.1 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 7.8, 3.7 mm

**M866 With Battery MHCBB CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine  
3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 40.2 dB

ABM1 comp = -10.8 dB A/m

BWC Factor = 0.162972 dB

Location: -3, -7.2, 3.7 mm

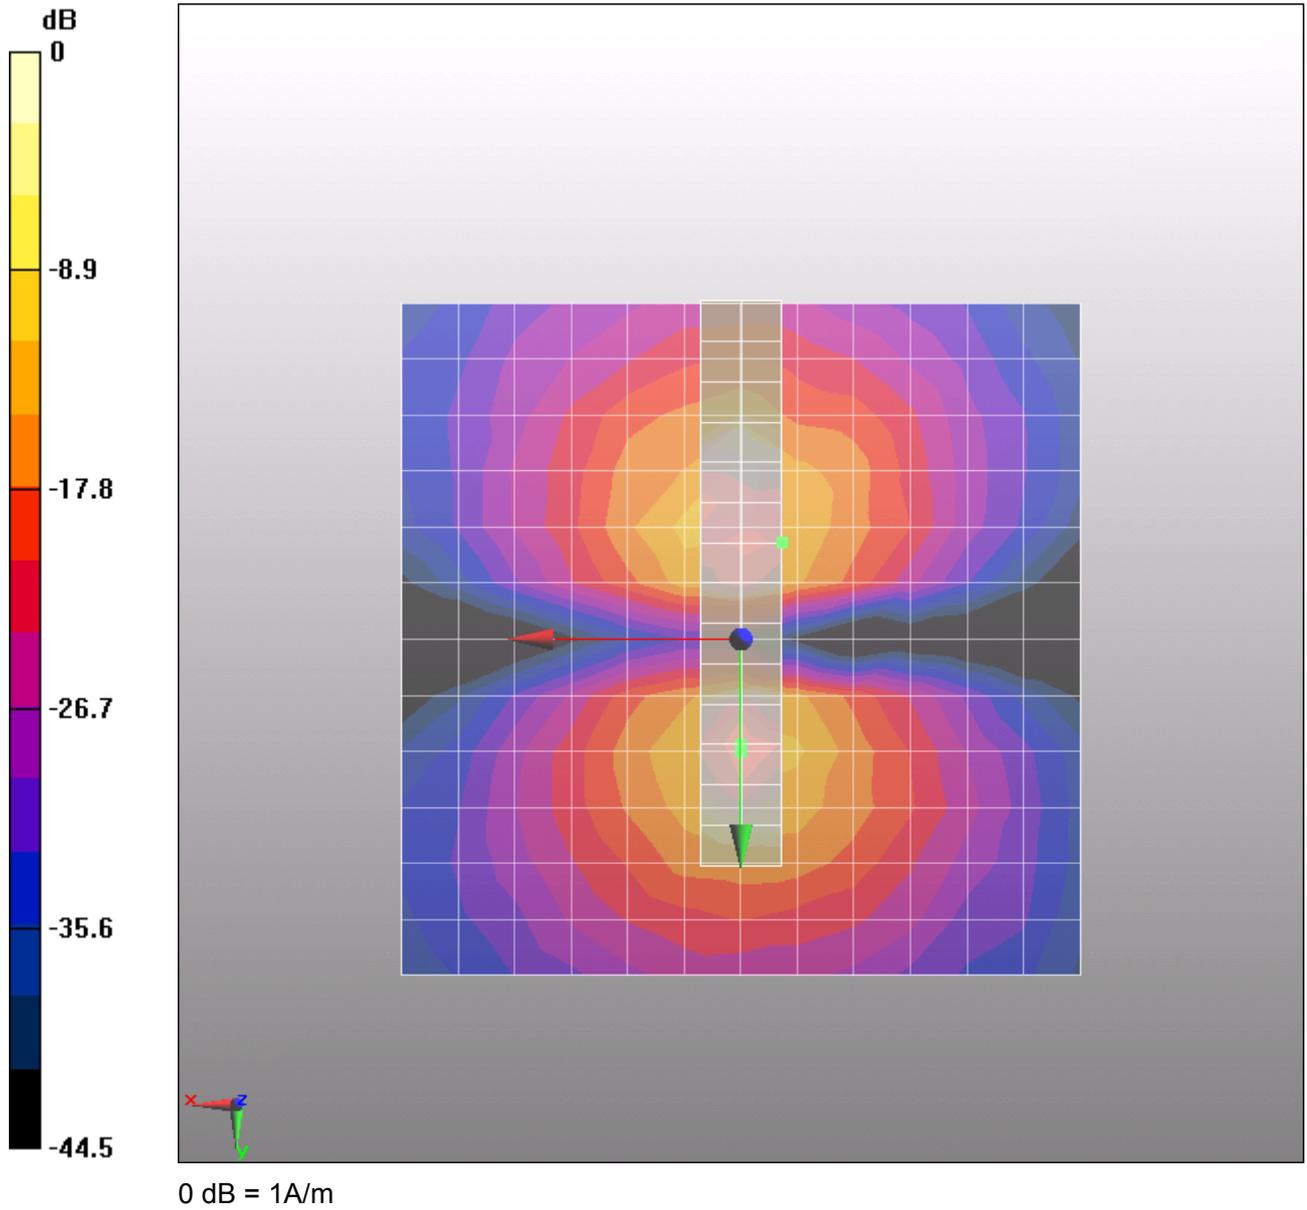


Figure 33 T-Coil CDMA PCS Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 112 of 168

**T-Coil CDMA PCS Z Axial (SN: MHCBB066I4437882)**

Date/Time: 5/9/2012 9:24:21 PM

Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery MHCBB CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -3.62 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -4.2, 3.7 mm

**M866 With Battery MHCBB CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 113 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -2.54 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -0.2, 3.7 mm

**M866 With Battery MHCBB CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM SNR(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 35.8 dB

ABM1 comp = -2.64 dB A/m

BWC Factor = 0.162972 dB

Location: -2, -0.2, 3.7 mm

**M866 With Battery MHCBB CDMA PCS HAC\_TCoil\_WD\_Emission/Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 56.4

Measure Window Start: 0ms

Measure Window Length: 2000ms

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RHA1204-0013HAC02R3

Page 114 of 168

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -2, -0.2, 3.7 mm

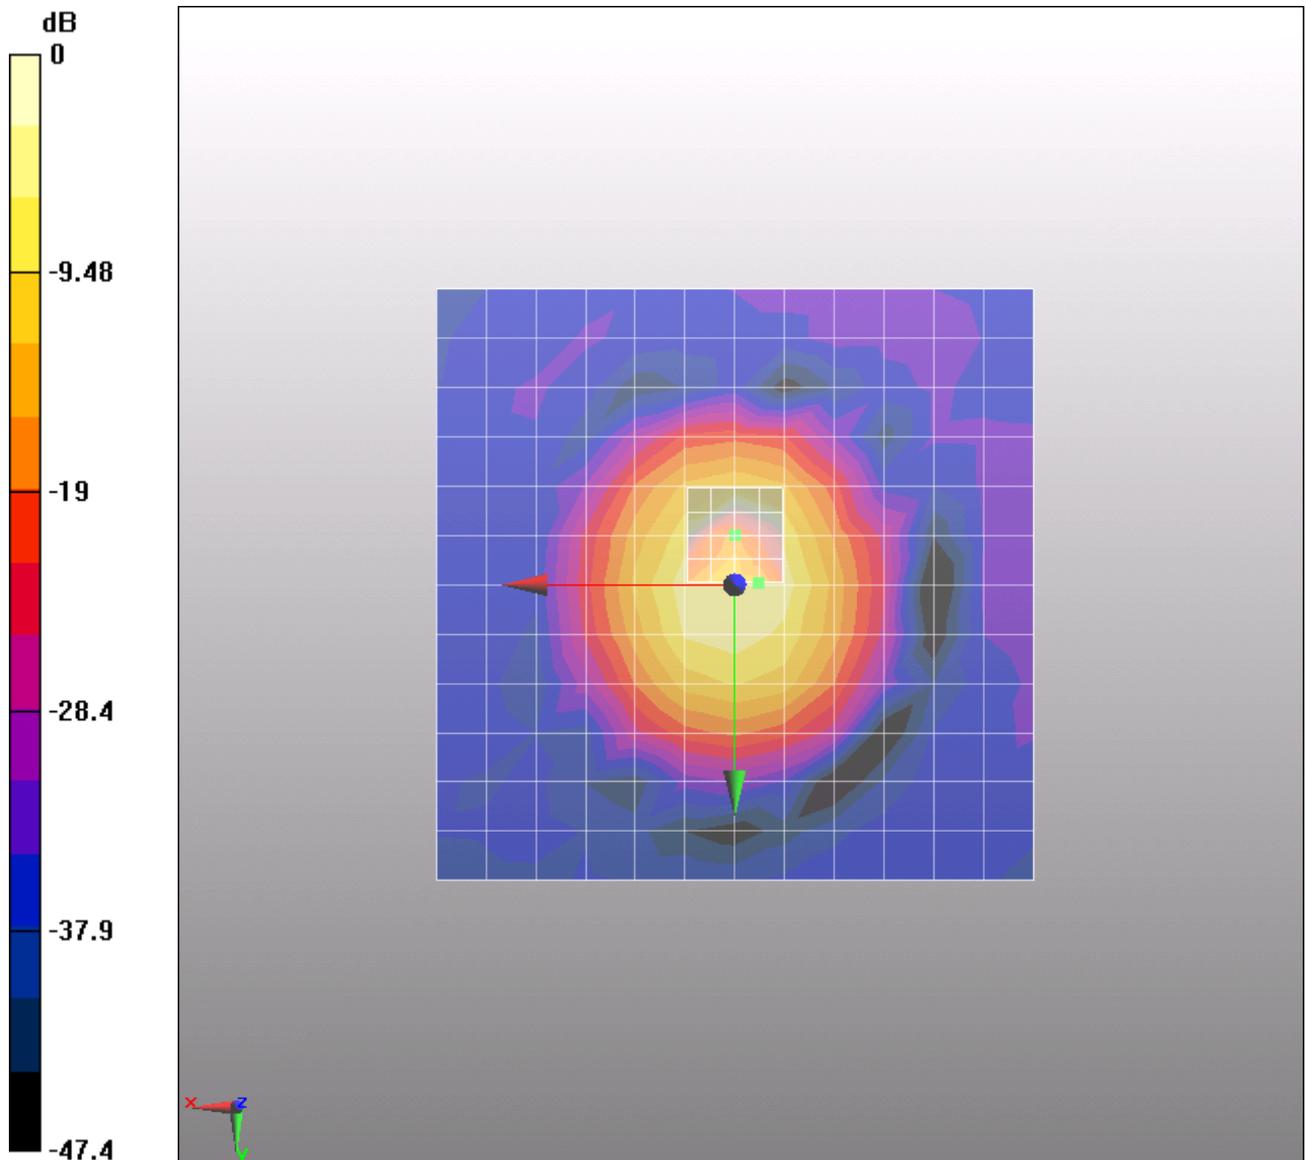

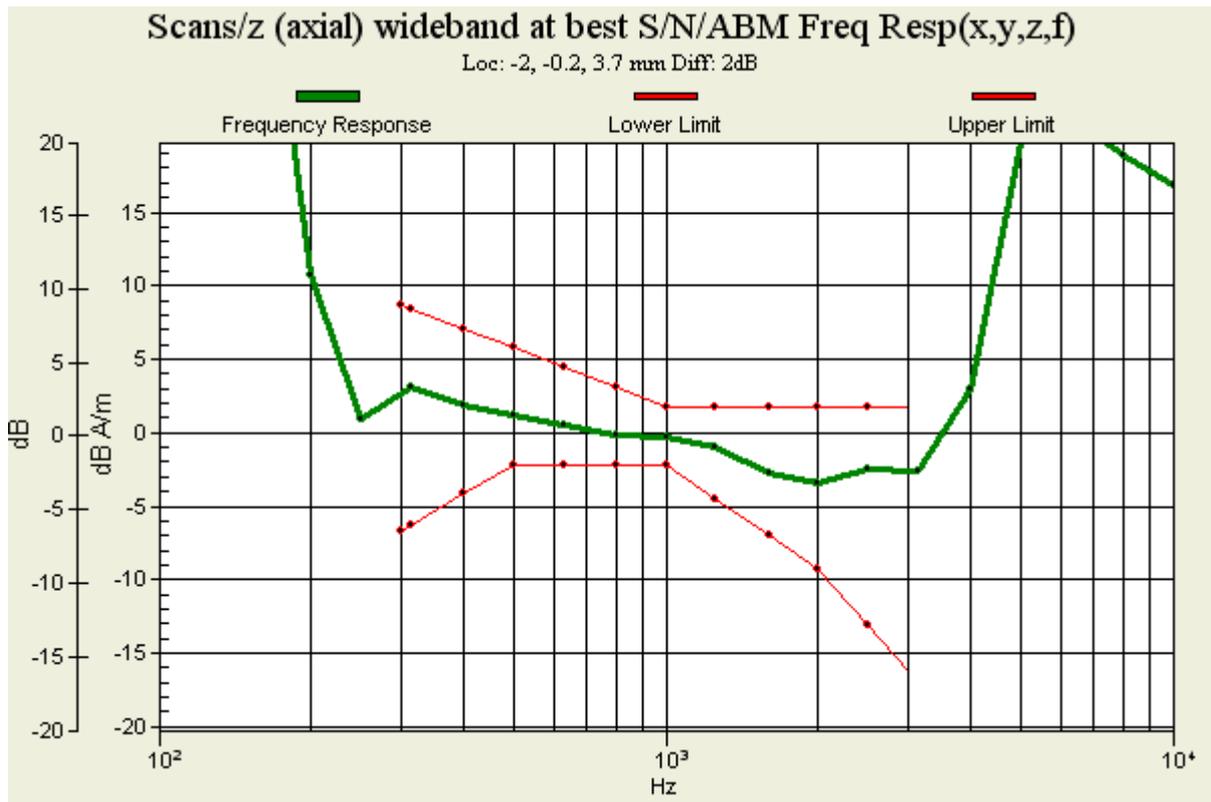


Figure 34 T-Coil CDMA PCS Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 116 of 168

**T-Coil CDMA AWS X longitudinal (SN: UAIBC16X03002980)**

Date/Time: 5/10/2012 1:17:56 AM

Communication System: CDMA ; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UAIBC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)**

**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.92 dB A/m

BWC Factor = 0.162972 dB

Location: -8.3, 0, 3.7 mm

**M866 With Battery UAIBC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine**

**3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 117 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.14 dB A/m

BWC Factor = 0.162972 dB

Location: -6, 0, 3.7 mm

**M866 With Battery UAIBC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine  
3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 37.6 dB

ABM1 comp = -9.16 dB A/m

BWC Factor = 0.162972 dB

Location: -9, 0, 3.7 mm

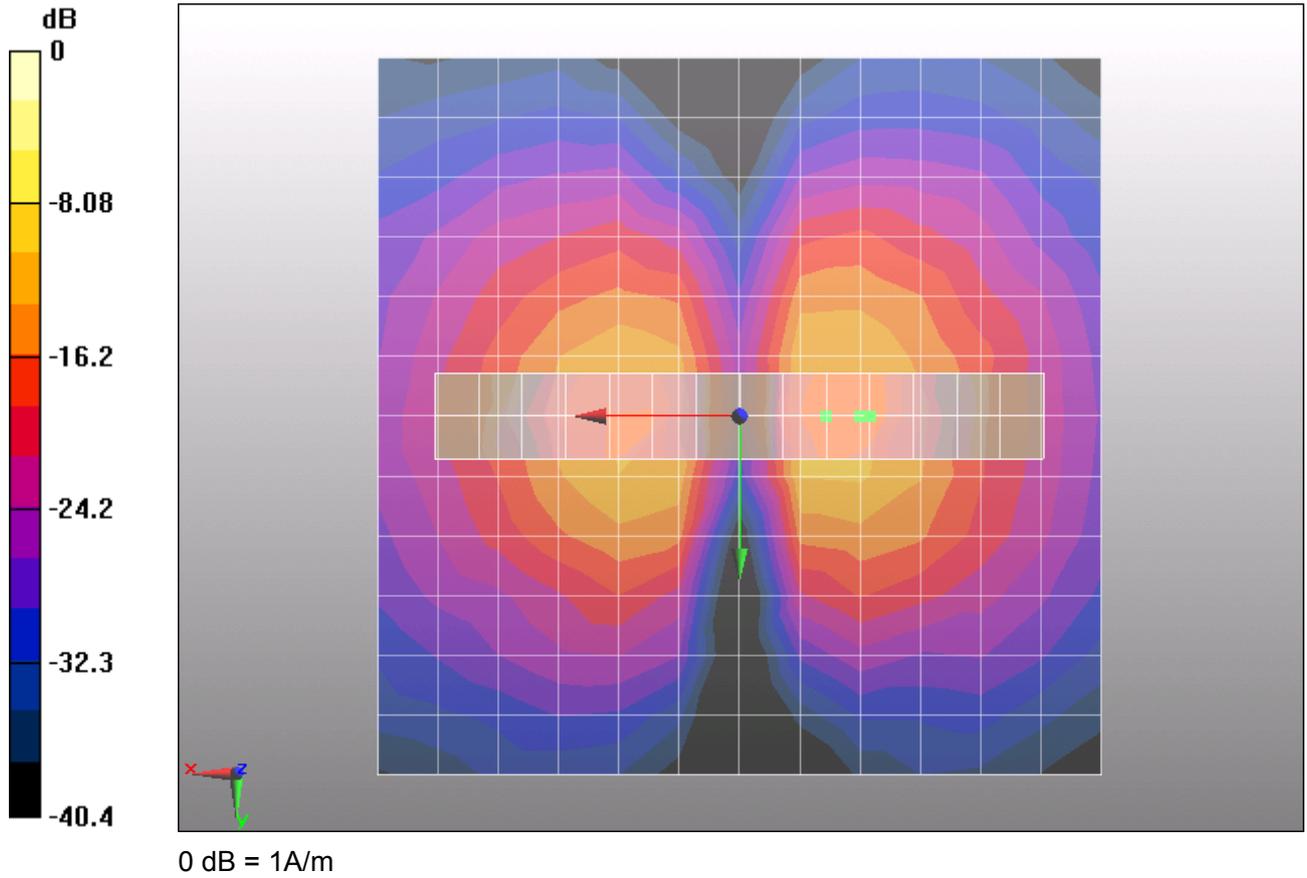


Figure 35 T-Coil CDMA AWS X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 119 of 168

**T-Coil CDMA AWS Y transversal (SN: UAIBC16X03002980)**

Date/Time: 5/10/2012 1:29:42 AM

Communication System: CDMA ; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UAIBC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -8.88 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -8.3, 3.7 mm

**M866 With Battery UAIBC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine  
3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 120 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.52 dB A/m

BWC Factor = 0.162972 dB

Location: 3, -9, 3.7 mm

**M866 With Battery UAIBC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine**

**3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 41.7 dB

ABM1 comp = -9.67 dB A/m

BWC Factor = 0.162972 dB

Location: 3, -6, 3.7 mm

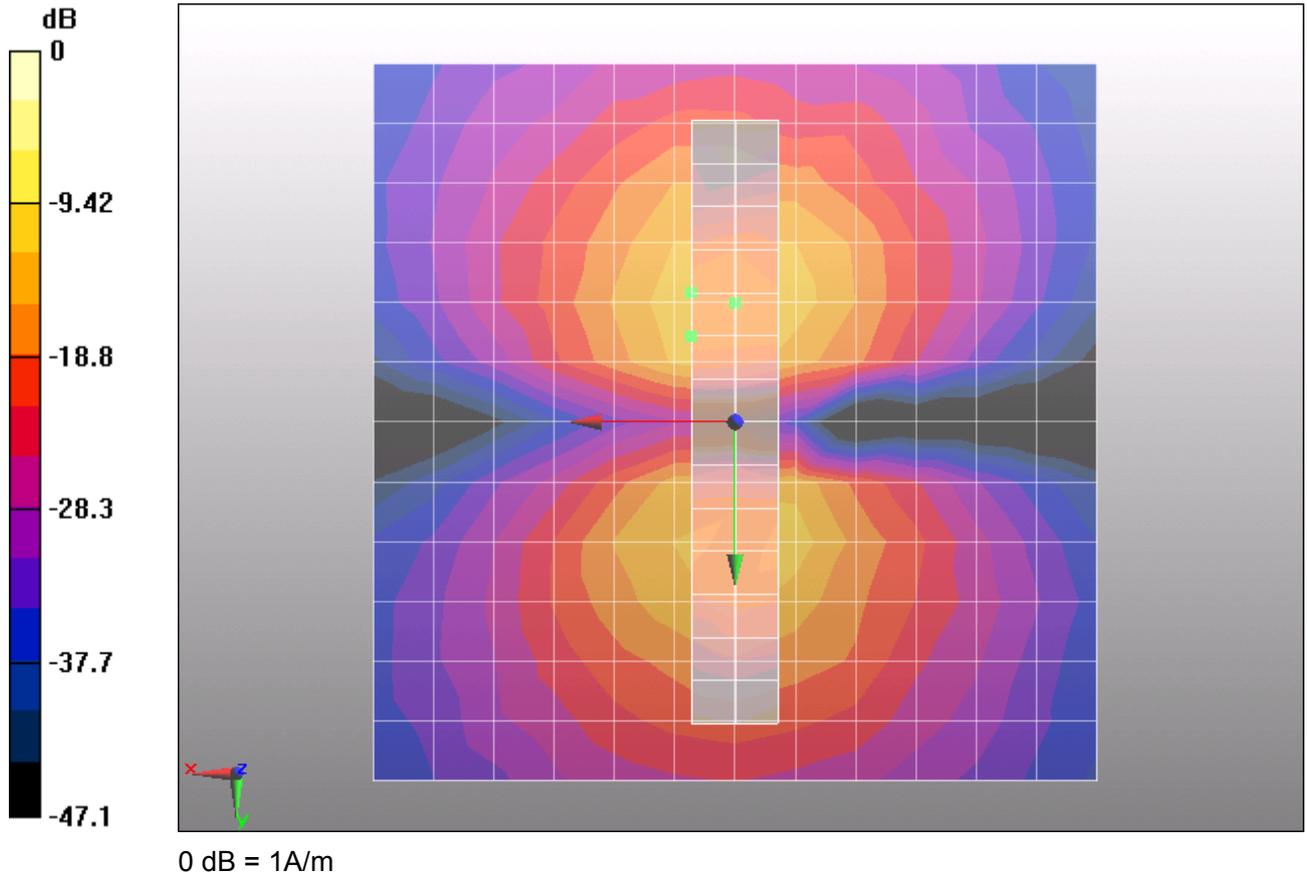


Figure 36 T-Coil CDMA AWS Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 122 of 168

**T-Coil CDMA AWS Z Axial (SN: UAIBC16X03002980)**

Date/Time: 5/10/2012 1:07:20 AM

Communication System: CDMA ; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UAIBC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -2.41 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

**M866 With Battery UAIBC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 123 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1 comp = -1.75 dB A/m

BWC Factor = 0.162972 dB

Location: 2, 0, 3.7 mm

### M866 With Battery UAIBC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM SNR(x,y,z) (5x5x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1/ABM2 = 38.6 dB

ABM1 comp = -2.63 dB A/m

BWC Factor = 0.162972 dB

Location: -2, 2, 3.7 mm

### M866 With Battery UAIBC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 56.4

Measure Window Start: 0ms

Measure Window Length: 2000ms

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RHA1204-0013HAC02R3

Page 124 of 168

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -2, 2, 3.7 mm

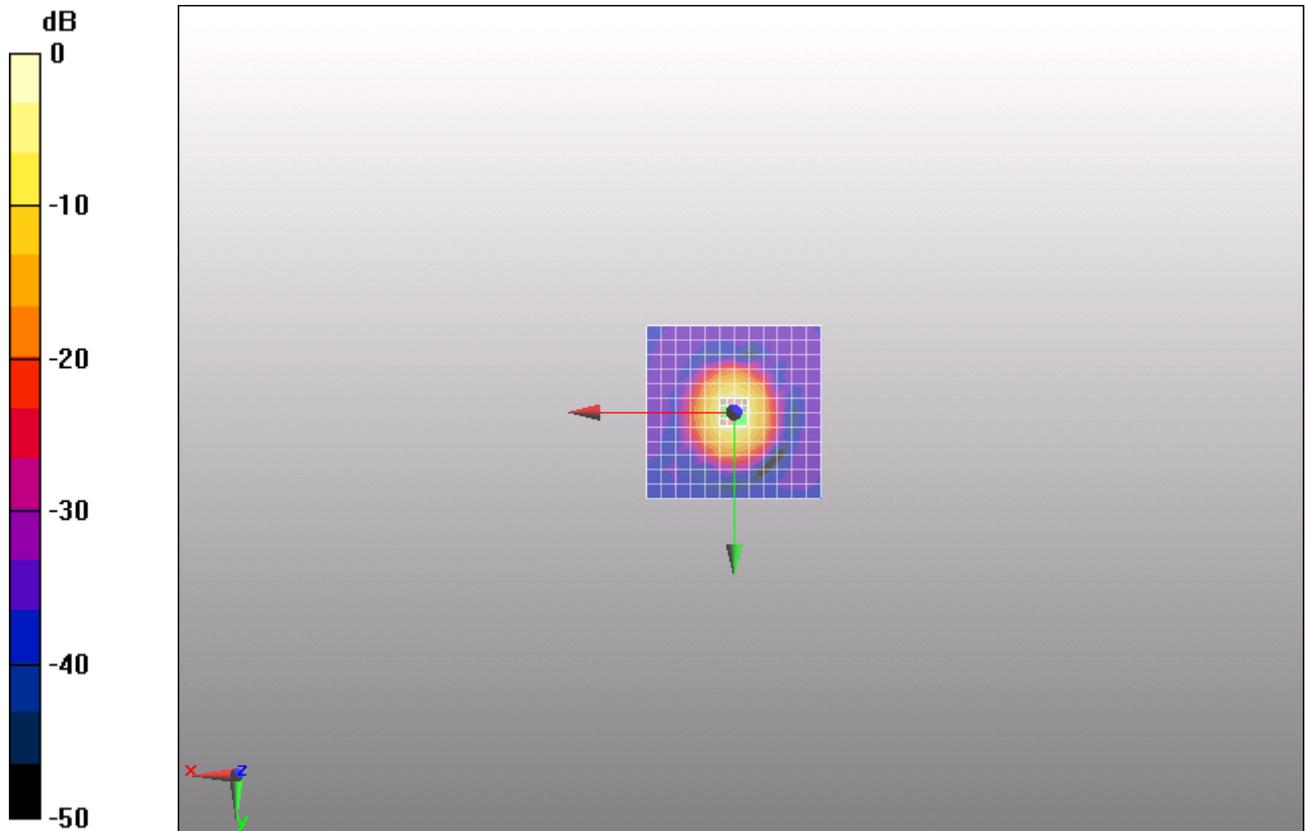

0 dB = 1A/m

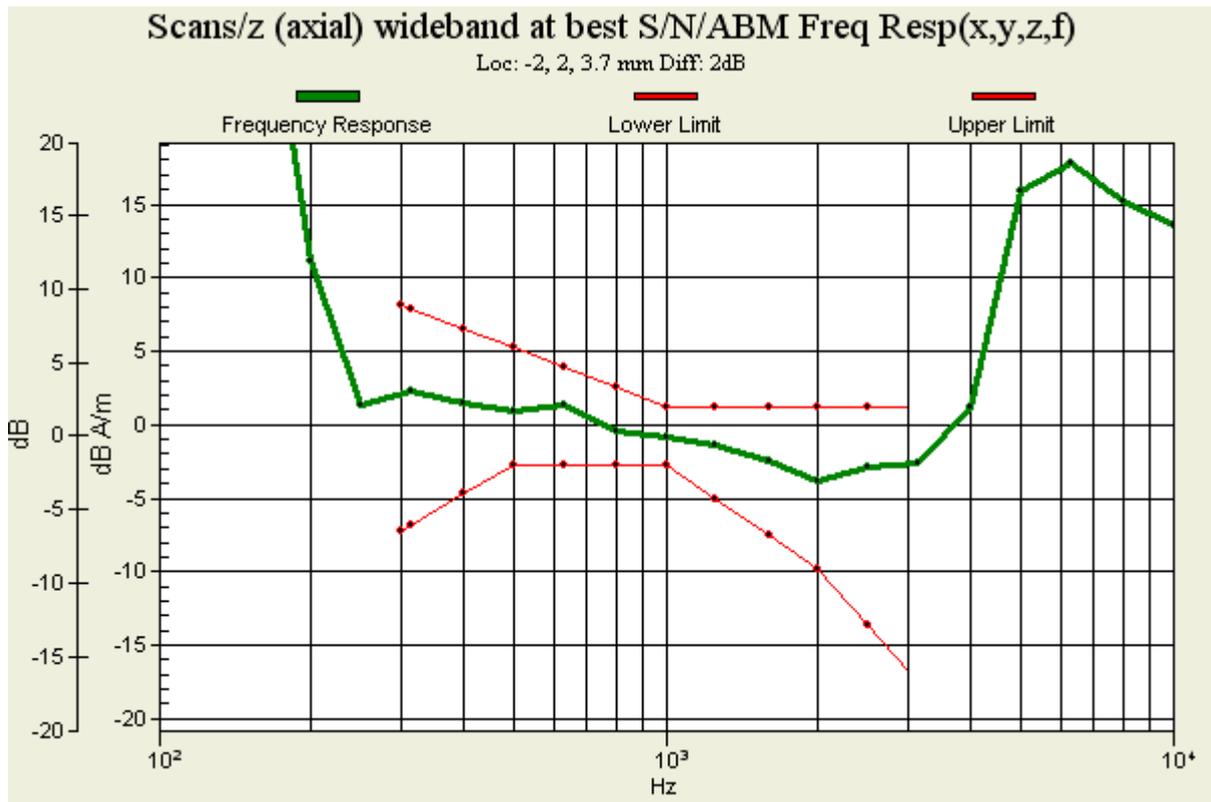


Figure 37 T-Coil CDMA AWS Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 126 of 168

**T-Coil CDMA AWS X longitudinal (SN: UNDC306X03000327)**

Date/Time: 5/10/2012 12:40:49 AM

Communication System: CDMA ; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UNDC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.12 dB A/m

BWC Factor = 0.162972 dB

Location: -8.3, 4.2, 3.7 mm

**M866 With Battery UNDC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine  
3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 127 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -8.78 dB A/m

BWC Factor = 0.162972 dB

Location: -6, 1.2, 3.7 mm

**M866 With Battery UNDC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine  
3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 37.5 dB

ABM1 comp = -9.39 dB A/m

BWC Factor = 0.162972 dB

Location: -9, 1.2, 3.7 mm

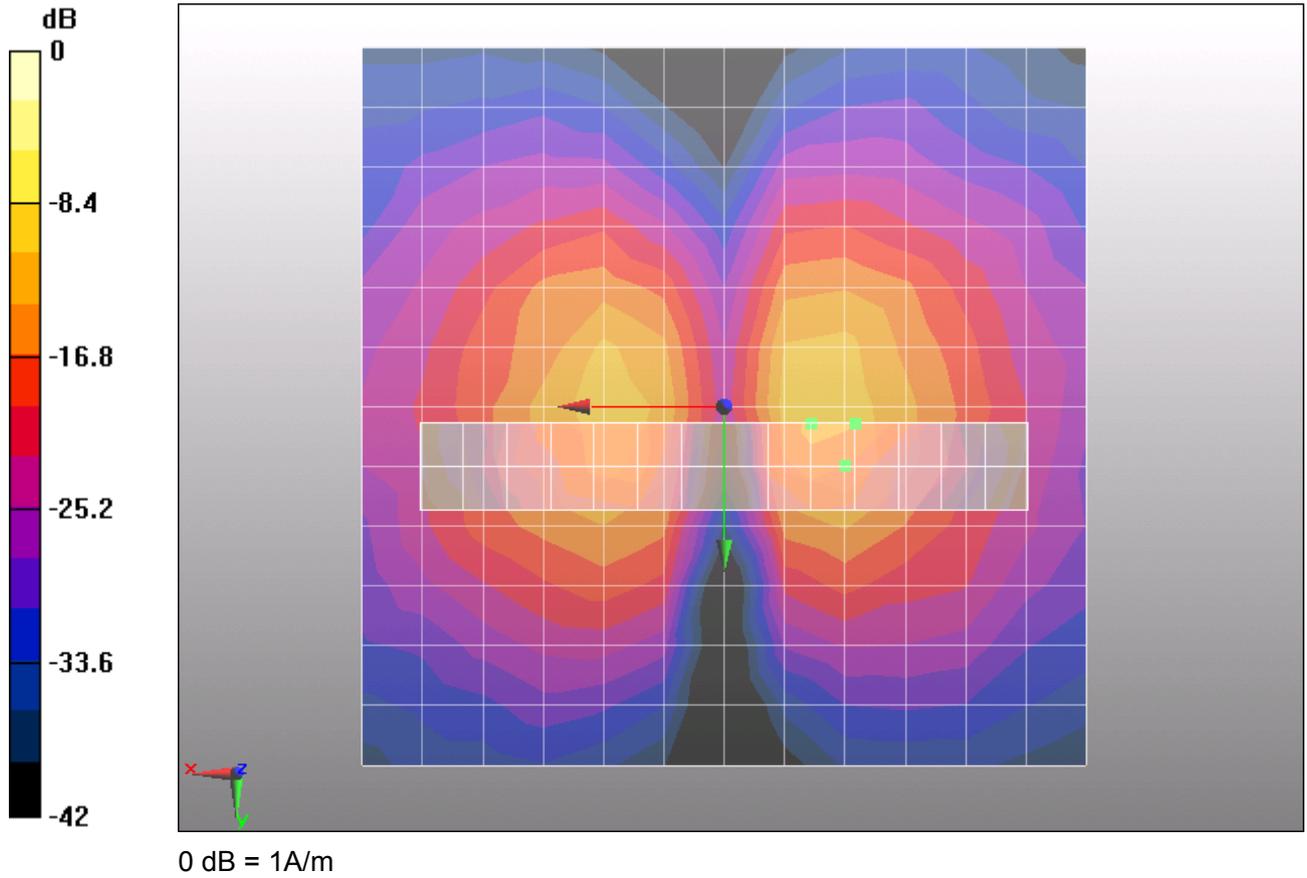


Figure 38 T-Coil CDMA AWS X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 129 of 168

**T-Coil CDMA AWS Y transversal (SN: UNDC306X03000327)**

Date/Time: 5/10/2012 12:52:34 AM

Communication System: CDMA ; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UNDC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.97 dB A/m

BWC Factor = 0.162972 dB

Location: 4.2, -8.3, 3.7 mm

**M866 With Battery UNDC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine  
3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 130 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -8.78 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -7.8, 3.7 mm

**M866 With Battery UNDC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine  
3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 43.1 dB

ABM1 comp = -10.3 dB A/m

BWC Factor = 0.162972 dB

Location: -3, -4.8, 3.7 mm

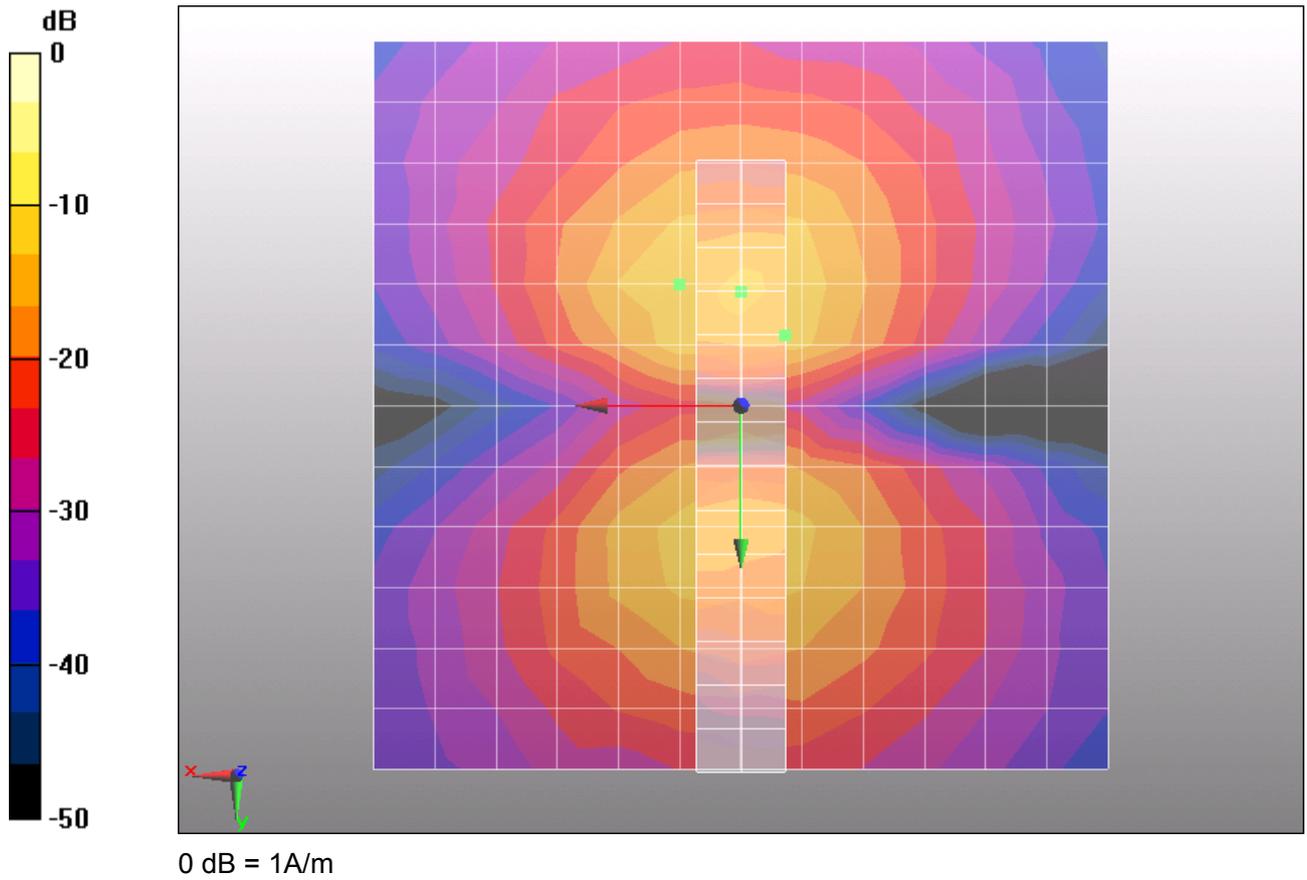


Figure 39 T-Coil CDMA AWS Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 132 of 168

**T-Coil CDMA AWS Z Axial (SN: UNDC306X03000327)**

Date/Time: 5/10/2012 12:30:30 AM

Communication System: CDMA ; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery UNDC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -2.56 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 4.2, 3.7 mm

**M866 With Battery UNDC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 133 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1 comp = -1.71 dB A/m

BWC Factor = 0.162972 dB

Location: 2, 0.2, 3.7 mm

### M866 With Battery UNDC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM SNR(x,y,z) (5x5x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1/ABM2 = 39.2 dB

ABM1 comp = -1.94 dB A/m

BWC Factor = 0.162972 dB

Location: -2, 2.2, 3.7 mm

### M866 With Battery UNDC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 56.4

Measure Window Start: 0ms

Measure Window Length: 2000ms

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RHA1204-0013HAC02R3

Page 134 of 168

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -2, 2.2, 3.7 mm

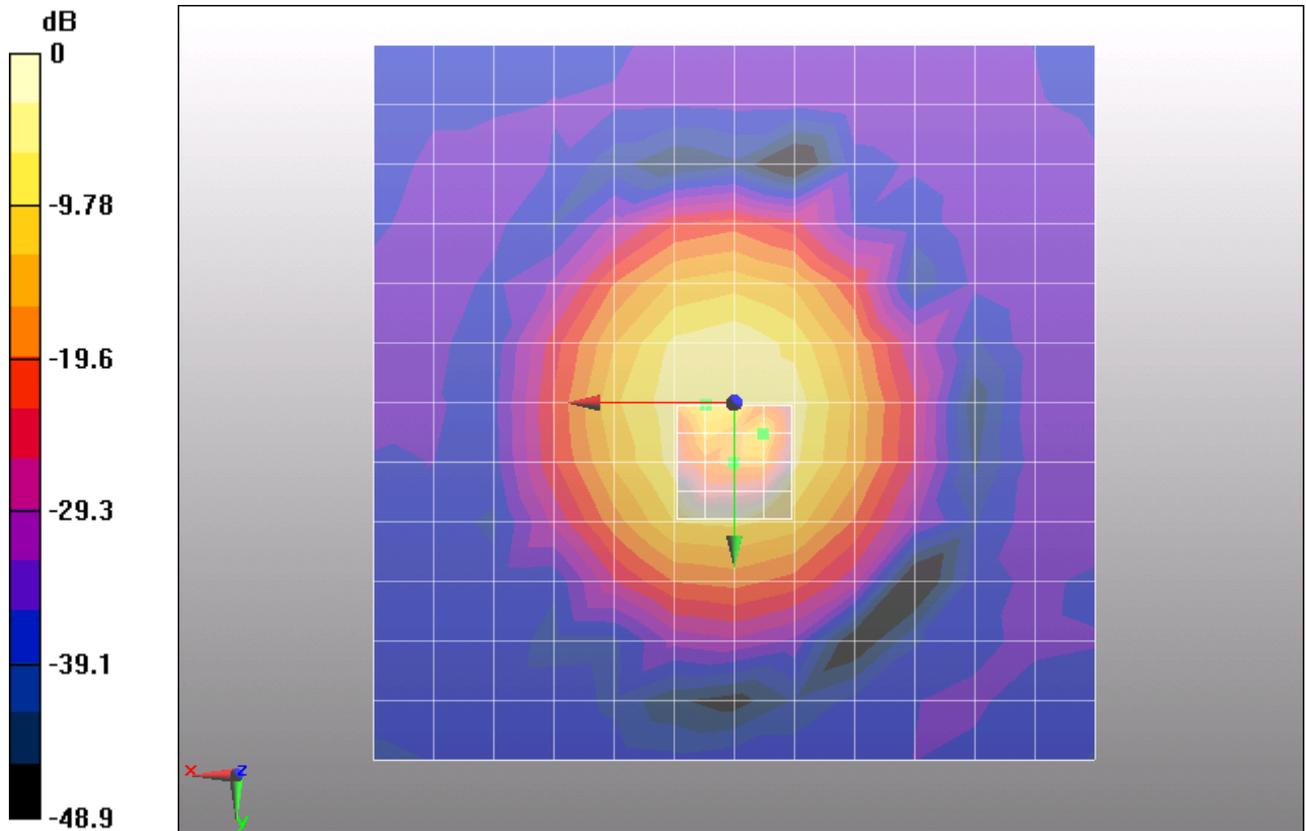

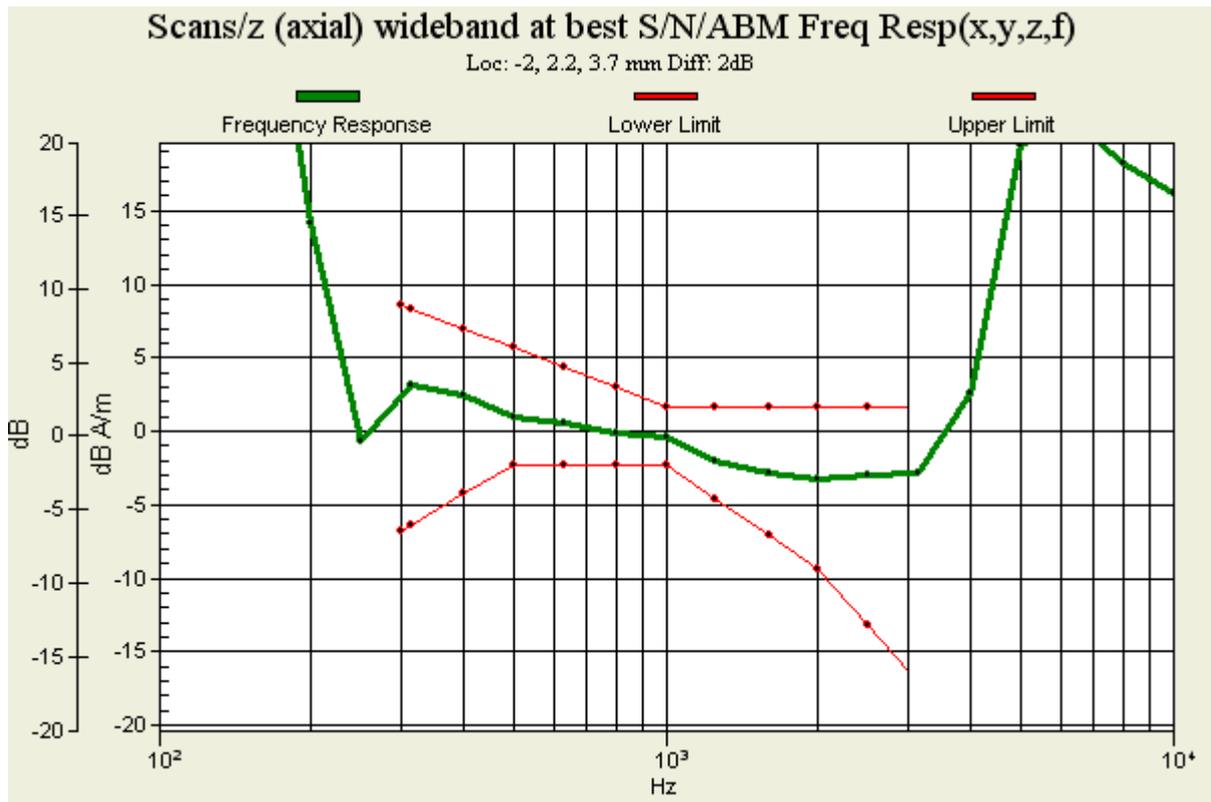


Figure 40 T-Coil CDMA AWS Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 136 of 168

**T-Coil CDMA AWS X longitudinal (SN: WHCC115691073294)**

Date/Time: 5/10/2012 12:01:28 AM

Communication System: CDMA ; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery WHCC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)**

**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.7 dB A/m

BWC Factor = 0.162972 dB

Location: -8.3, 0, 3.7 mm

**M866 With Battery WHCC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine**

**3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 137 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

<b>Category</b>	<b>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</b>
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.28 dB A/m

BWC Factor = 0.162972 dB

Location: -6, 3, 3.7 mm

**M866 With Battery WHCC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine  
3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

<b>Category</b>	<b>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</b>
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 35.2 dB

ABM1 comp = -9.41 dB A/m

BWC Factor = 0.162972 dB

Location: 6, 3, 3.7 mm

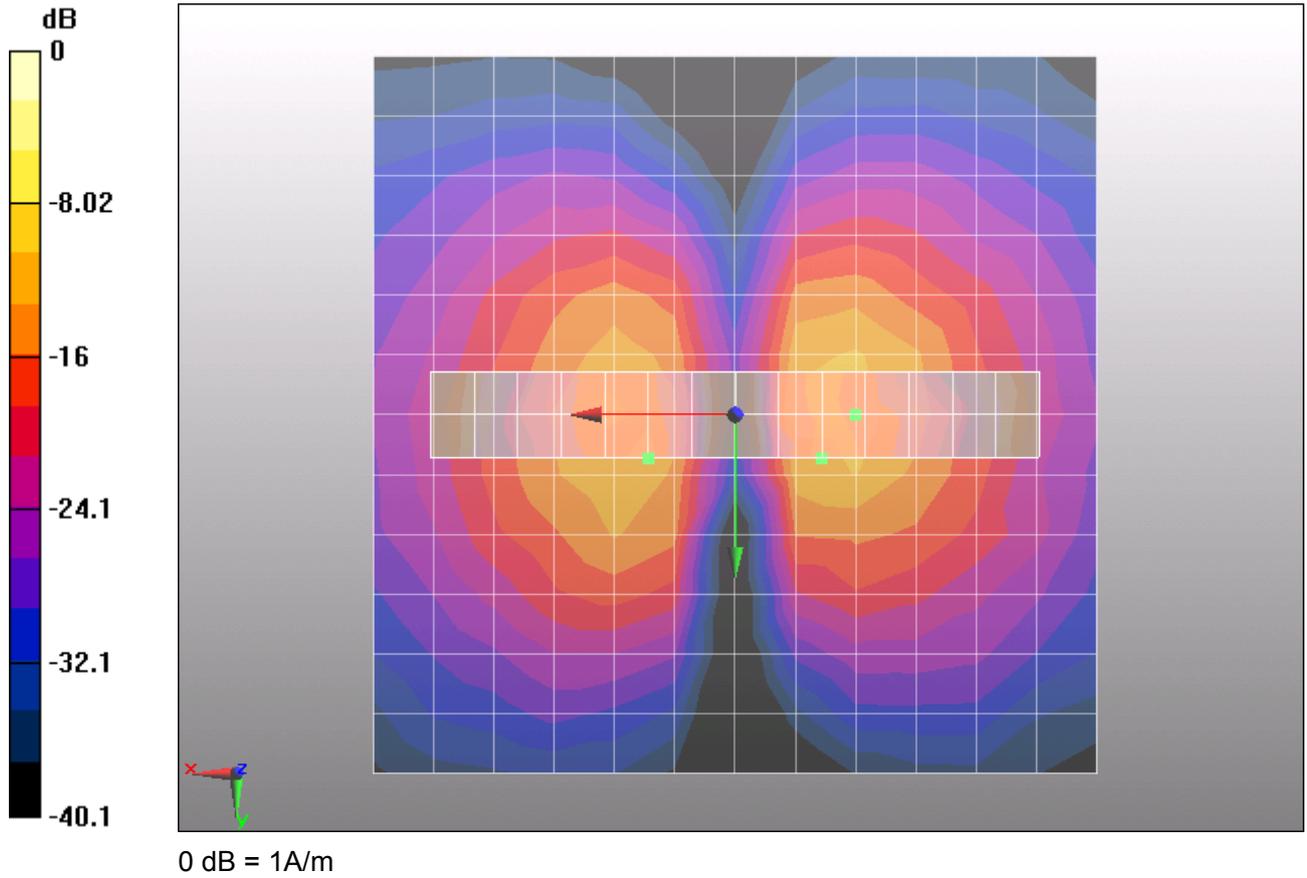


Figure 41 T-Coil CDMA AWS X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 139 of 168

**T-Coil CDMA AWS Y transversal (SN: WHCC115691073294)**

Date/Time: 5/10/2012 12:13:14 AM

Communication System: CDMA ; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery WHCC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.62 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -8.3, 3.7 mm

**M866 With Battery WHCC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine  
3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 140 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1 comp = -9.11 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -6, 3.7 mm

### M866 With Battery WHCC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine 3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1/ABM2 = 42.7 dB

ABM1 comp = -9.84 dB A/m

BWC Factor = 0.162972 dB

Location: -3, -6, 3.7 mm

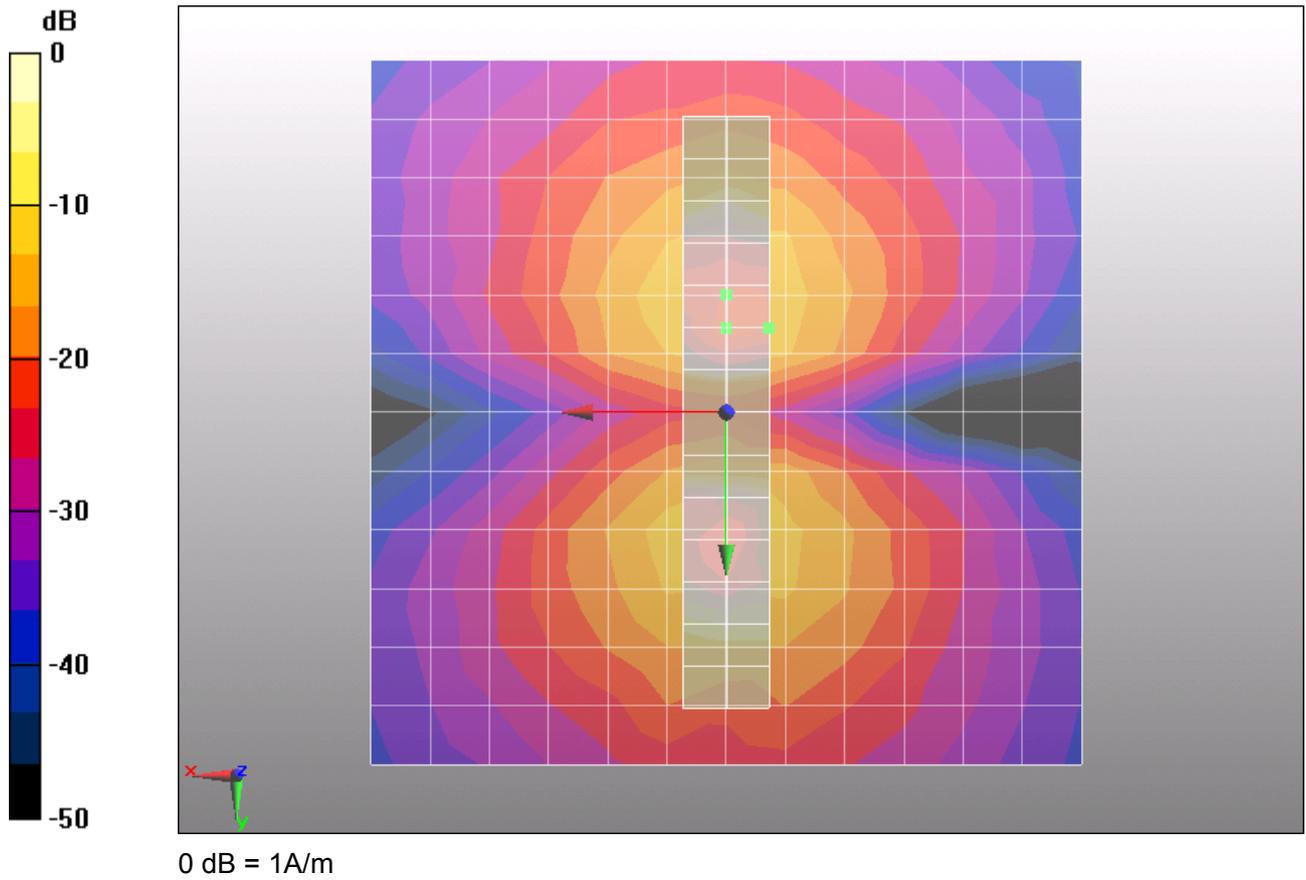


Figure 42 T-Coil CDMA AWS Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 142 of 168

**T-Coil CDMA AWS Z Axial (SN: WHCC115691073294)**

Date/Time: 5/9/2012 11:50:54 PM

Communication System: CDMA ; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery WHCC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -1.68 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

**M866 With Battery WHCC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 143 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1 comp = -1.47 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

### M866 With Battery WHCC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM SNR(x,y,z) (5x5x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1/ABM2 = 34.1 dB

ABM1 comp = -1.47 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

### M866 With Battery WHCC CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 56.4

Measure Window Start: 0ms

Measure Window Length: 2000ms

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RHA1204-0013HAC02R3

Page 144 of 168

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

Diff = 1.71 dB

BWC Factor = 10.8 dB

Location: 0, 0, 3.7 mm

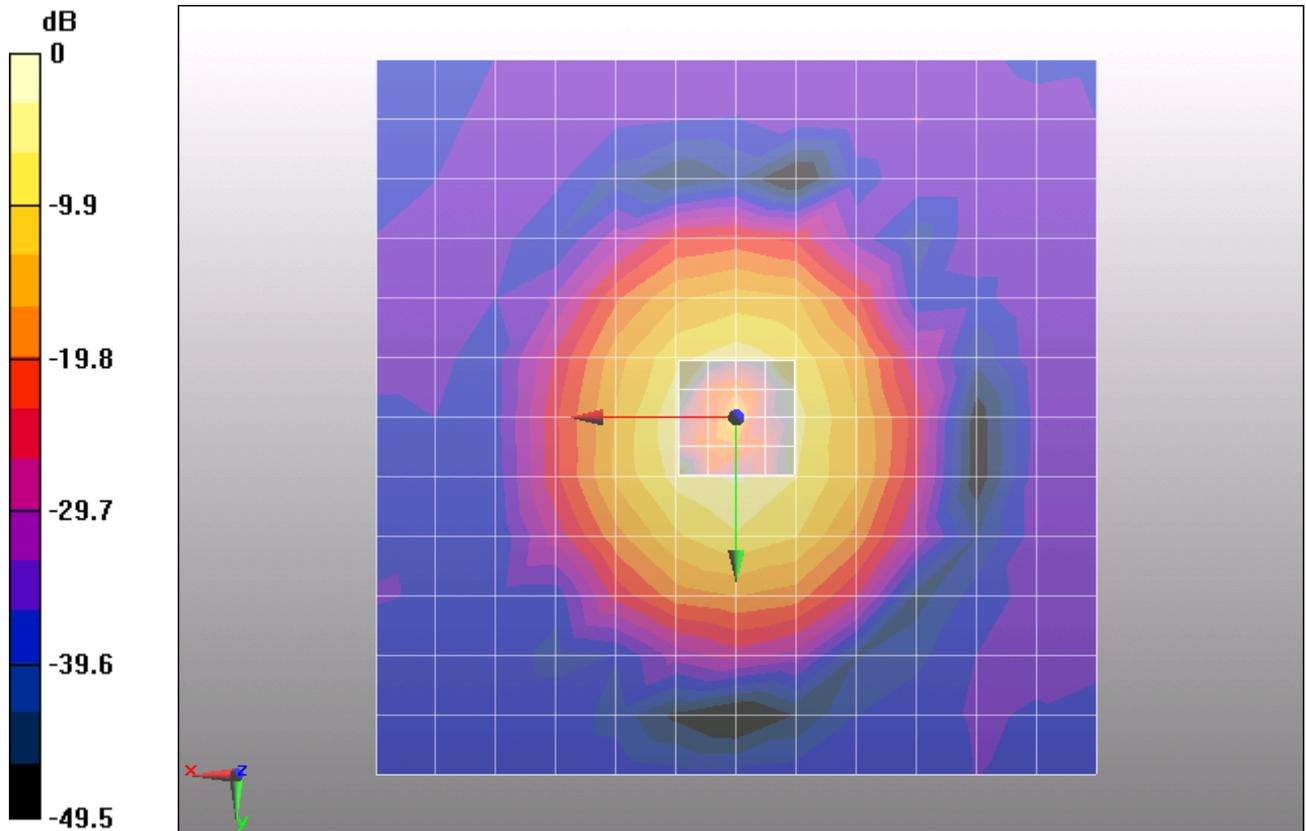

0 dB = 1A/m

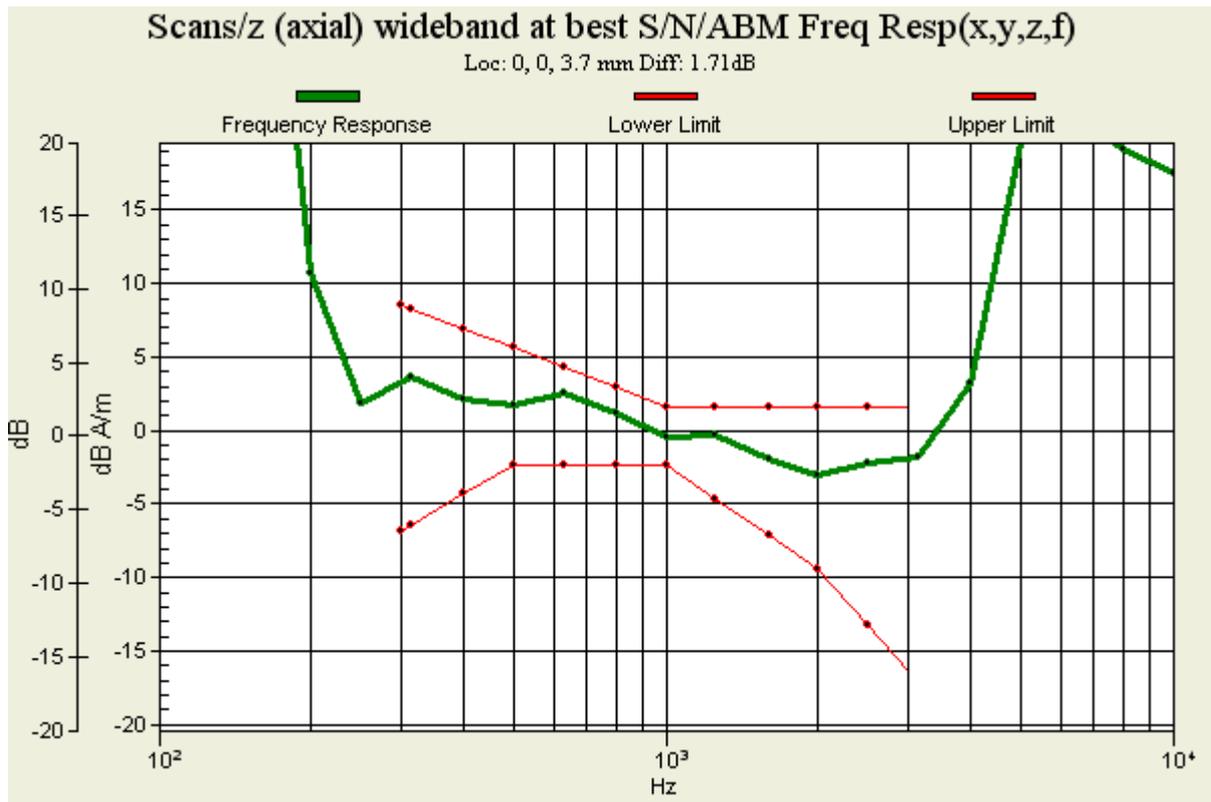


Figure 43 T-Coil CDMA AWS Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 146 of 168

**T-Coil CDMA AWS X longitudinal (SN: MHCBB066I4437882)**

Date/Time: 5/10/2012 1:55:03 AM

Communication System: CDMA ; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery MHCBB CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)**

**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.5 dB A/m

BWC Factor = 0.162972 dB

Location: -8.3, 0, 3.7 mm

**M866 With Battery MHCBB CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine**

**3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 147 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.34 dB A/m

BWC Factor = 0.162972 dB

Location: -6, 0, 3.7 mm

**M866 With Battery MHCBB CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine  
3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 37.7 dB

ABM1 comp = -9.58 dB A/m

BWC Factor = 0.162972 dB

Location: -9, -3, 3.7 mm

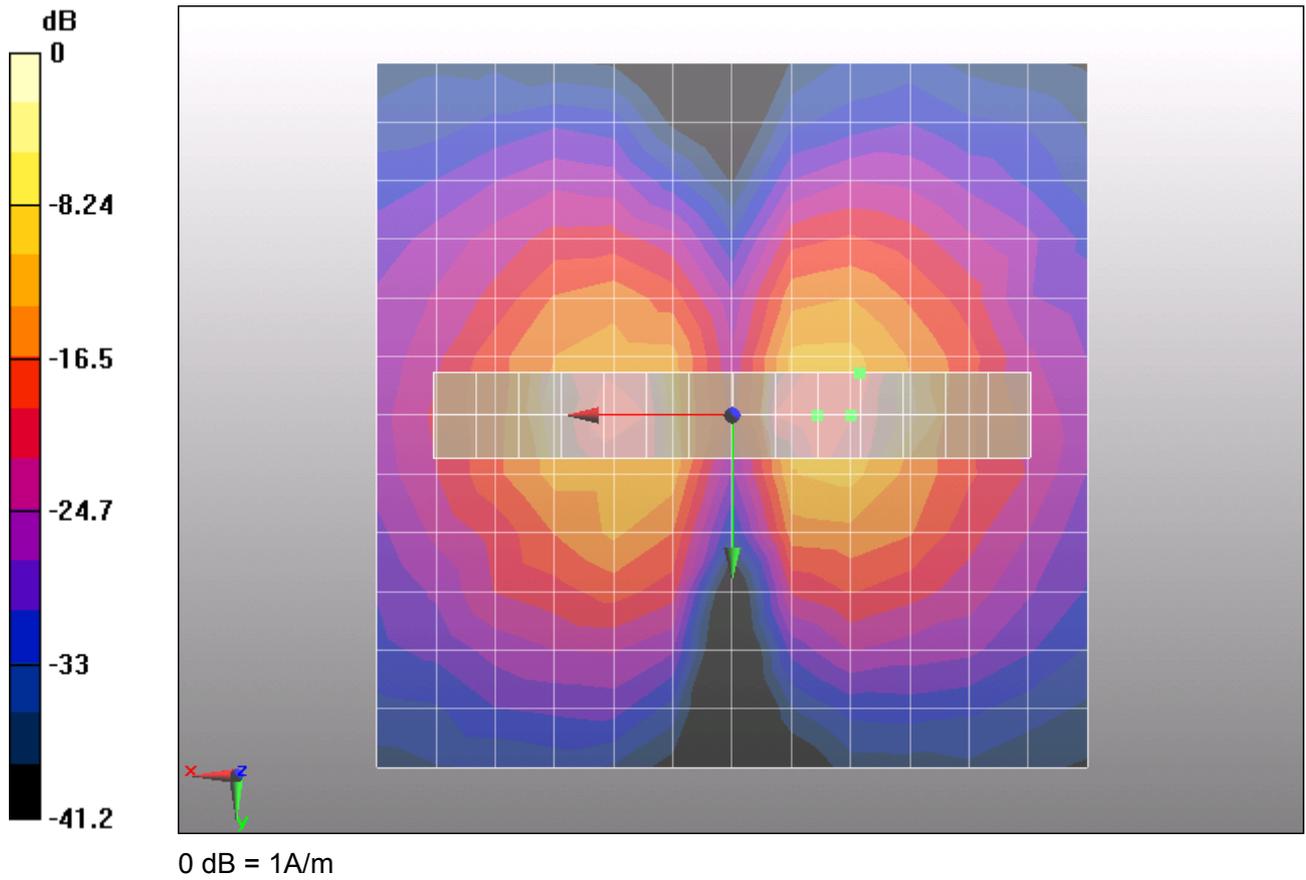


Figure 44 T-Coil CDMA AWS X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 149 of 168

**T-Coil CDMA AWS Y transversal (SN: MHCBB066I4437882)**

Date/Time: 5/10/2012 2:06:52 AM

Communication System: CDMA ; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery MHCBB CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/y (transversal)**

**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.94 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -8.3, 3.7 mm

**M866 With Battery MHCBB CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine**

**3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 150 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -9.16 dB A/m

BWC Factor = 0.162972 dB

Location: 0, -9, 3.7 mm

**M866 With Battery MHCBB CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/y (transversal) fine  
3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 41.8 dB

ABM1 comp = -11.4 dB A/m

BWC Factor = 0.162972 dB

Location: -3, -6, 3.7 mm

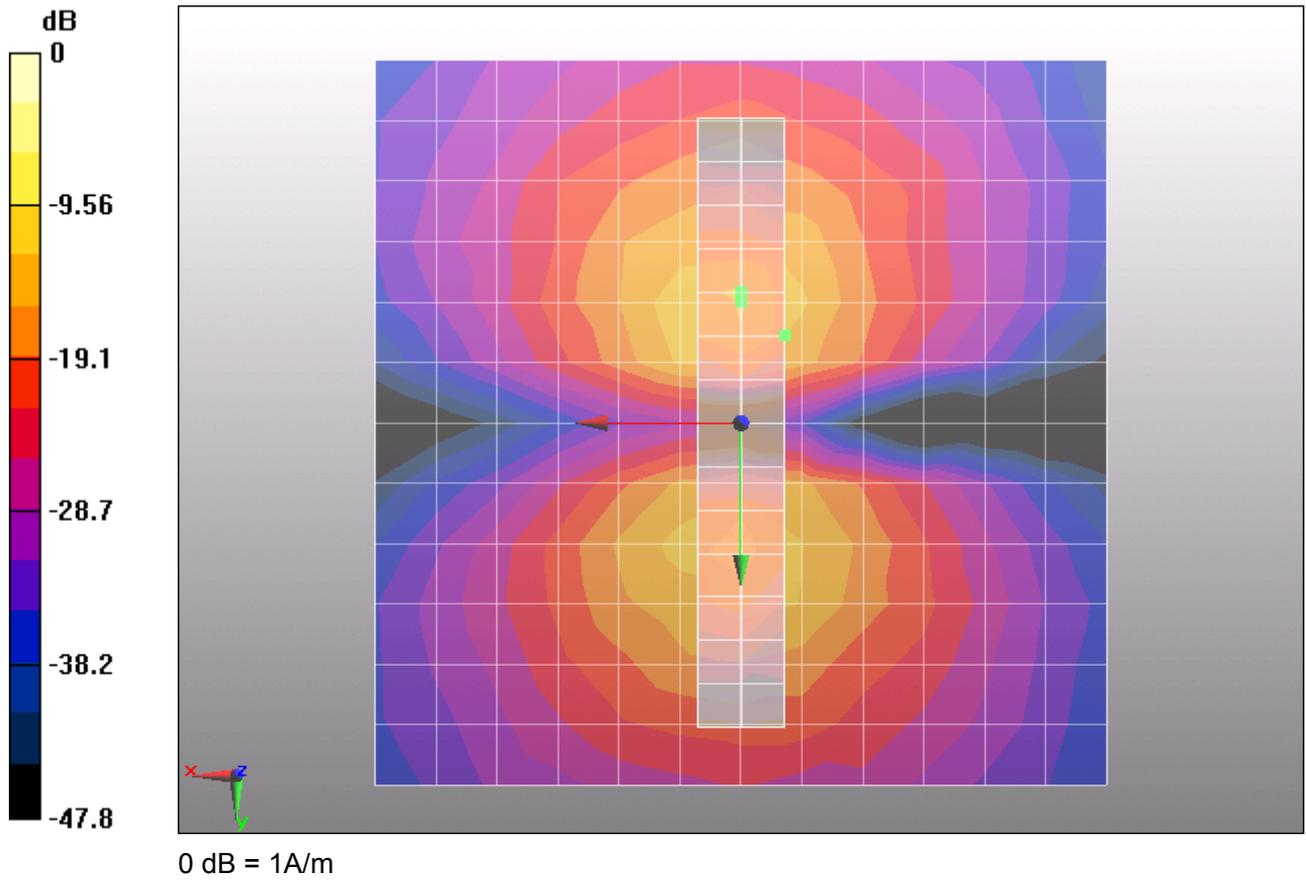


Figure 45 T-Coil CDMA AWS Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 152 of 168

**T-Coil CDMA PCS Z Axial (SN: MHCBB066I4437882)**

Date/Time: 5/10/2012 1:44:24 AM

Communication System: CDMA ; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY4 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**M866 With Battery MHCBB CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1 comp = -2.83 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

**M866 With Battery MHCBB CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 153 of 168

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1 comp = -1.47 dB A/m

BWC Factor = 0.162972 dB

Location: 0, 0, 3.7 mm

### M866 With Battery MHCBB CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM SNR(x,y,z) (5x5x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 28.8

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.162972 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

### Cursor:

ABM1/ABM2 = 38.7 dB

ABM1 comp = -2.64 dB A/m

BWC Factor = 0.162972 dB

Location: -2, 0, 3.7 mm

### M866 With Battery MHCBB CDMA AWS HAC\_TCoil\_WD\_Emission/Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 56.4

Measure Window Start: 0ms

Measure Window Length: 2000ms

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RHA1204-0013HAC02R3

Page 154 of 168

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -2, 0, 3.7 mm

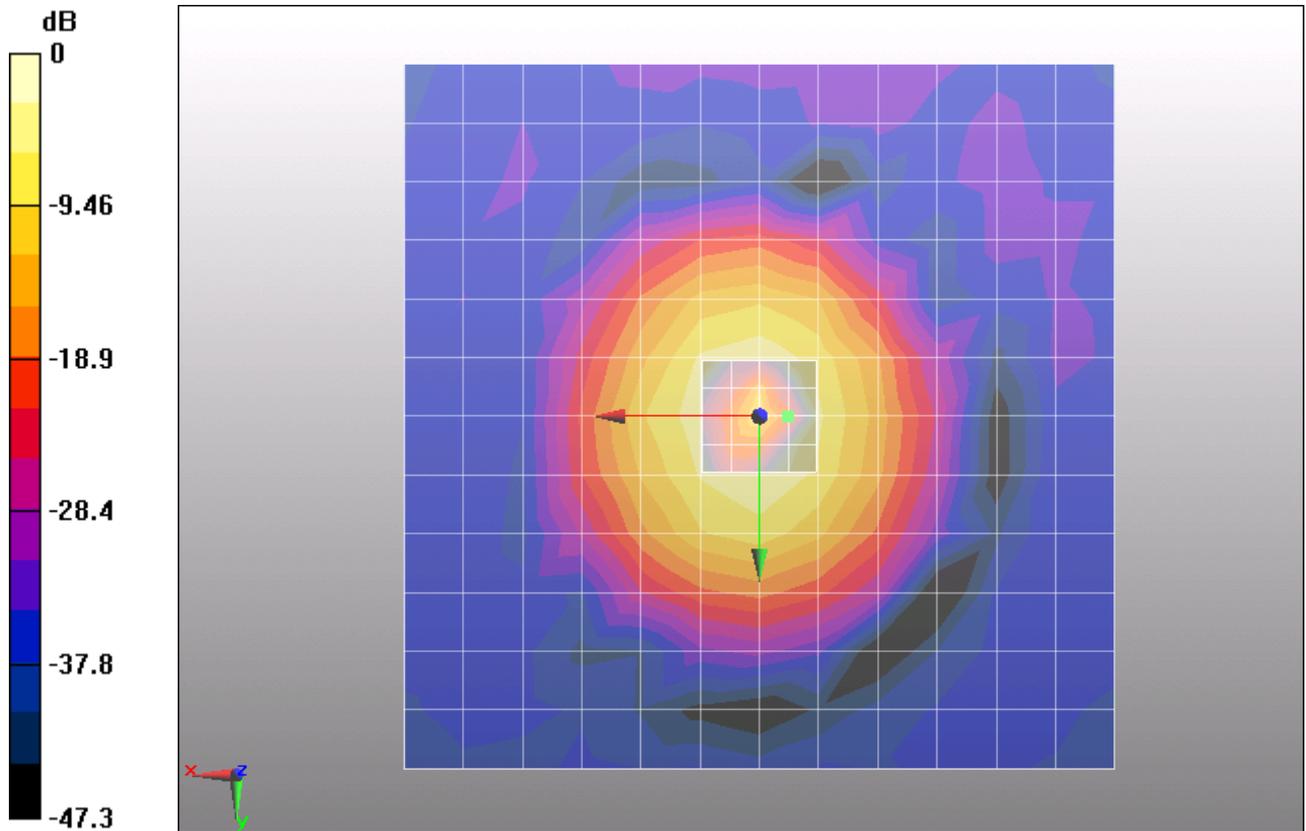

0 dB = 1A/m

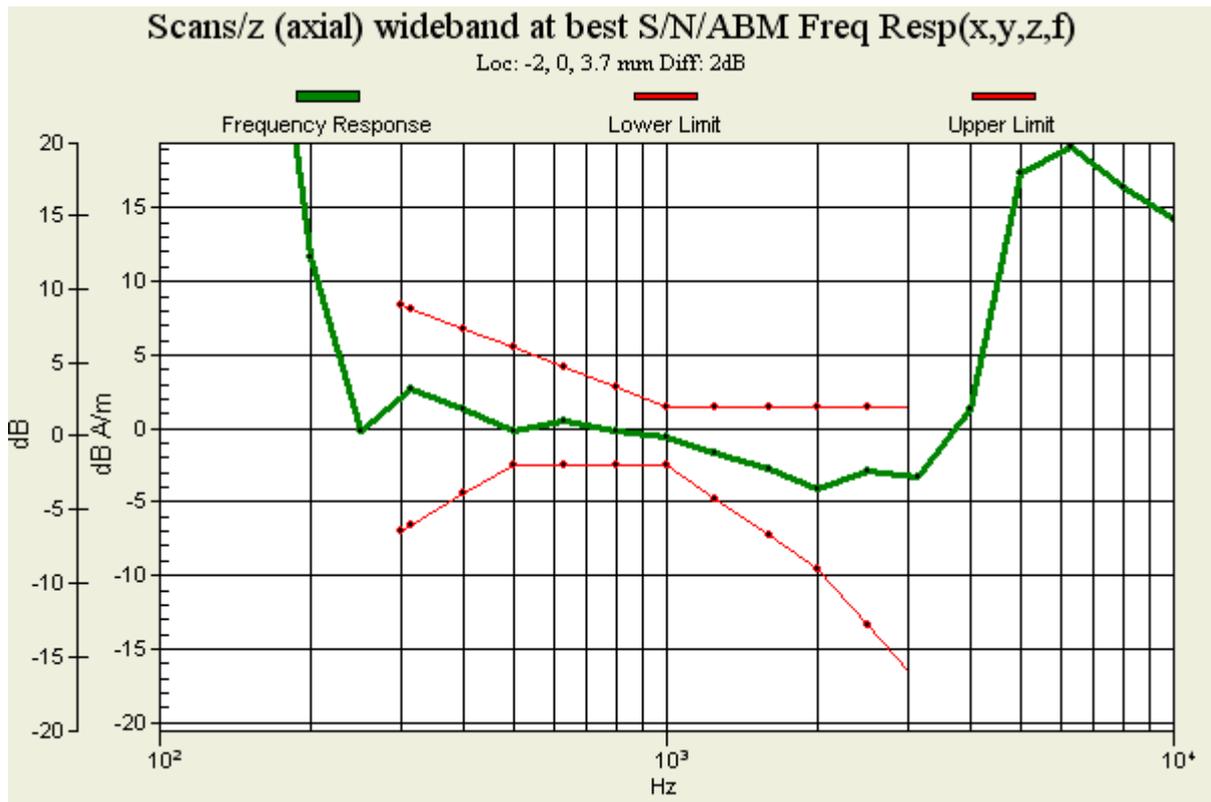


Figure 46 T-Coil CDMA PCS Z Axial

# TA Technology (Shanghai) Co., Ltd. Test Report

## ANNEX C: Probe Calibration Certificate

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA Shanghai (Auden)**

Certificate No: **AM1DV3-3082\_Feb12**

### CALIBRATION CERTIFICATE

Object: **AM1DV3 - SN: 3082**

Calibration procedure(s): **QA CAL-24.v3  
Calibration procedure for AM1D magnetic field probes and TMFS in the  
audio range**

Calibration date: **February 17, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	28-Sep-11 (No:11450)	Sep-12
Reference Probe AM1DV3	SN: 3000	17-Aug-11 (No. AM1D-3000_Aug11)	Aug-12
DAE4	SN: 781	20-Apr-11 (No. DAE4-781_Apr11)	Apr-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
AMCC	1050	12-Oct-11 (in house check Oct-11)	Oct-13

	Name	Function	Signature
Calibrated by:	Claudio Leubler	Laboratory Technician	
Approved by:	Fin Bornholt	R&D Director	

Issued: February 20, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

#### References

- [1] ANSI C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] DASY5 manual, Chapter: Hearing Aid Compatibility (HAC) T-Coil Extension

#### Description of the AM1D probe

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.

The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below.

The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1] without additional shielding.

#### Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

#### Methods Applied and Interpretation of Parameters

- *Coordinate System:* The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [2], with the tip pointing to "southwest" orientation.
- *Functional Test:* The functional test preceding calibration includes test of Noise level  
RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected.  
Frequency response verification from 100 Hz to 10 kHz.
- *Connector Rotation:* The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and -120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coil.
- *Sensor Angle:* The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and -120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.
- *Sensitivity:* With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 158 of 168

**AM1D probe identification and configuration data**

Item	<b>AM1DV3</b> Audio Magnetic 1D Field Probe
Type No	SP AM1 001 BA
Serial No	<b>3082</b>

Overall length	296 mm
Tip diameter	6.0 mm (at the tip)
Sensor offset	3.0 mm (centre of sensor from tip)
Internal Amplifier	20 dB

Manufacturer / Origin	Schmid & Partner Engineering AG, Zürich, Switzerland
Manufacturing date	May 28, 2010
Last calibration date	November 29, 2010

**Calibration data**

Connector rotation angle	(in DASY system)	<b>5.0 °</b>	+/- 3.6 ° (k=2)
Sensor angle	(in DASY system)	<b>0.62 °</b>	+/- 0.5 ° (k=2)
Sensitivity at 1 kHz	(in DASY system)	<b>0.00739 V / (A/m)</b>	+/- 2.2 % (k=2)

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 159 of 168

### ANNEX D: DAE4 Calibration Certificate

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA-SH (Auden)**

Certificate No: **DAE4-871\_Nov11**

CALIBRATION CERTIFICATE																			
Object	DAE4 - SD 000 D04 BJ - SN: 871																		
Calibration procedure(s)	QA CAL-06.v23 Calibration procedure for the data acquisition electronics (DAE)																		
Calibration date:	November 22, 2011																		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Primary Standards</th> <th style="width: 15%;">ID #</th> <th style="width: 30%;">Cal Date (Certificate No.)</th> <th style="width: 25%;">Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Keithley Multimeter Type 2001</td> <td>SN: 0810278</td> <td>28-Sep-11 (No:11450)</td> <td>Sep-12</td> </tr> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> <tr> <td>Calibrator Box V1.1</td> <td>SE UMS 006 AB 1004</td> <td>08-Jun-11 (in house check)</td> <td>In house check: Jun-12</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Keithley Multimeter Type 2001	SN: 0810278	28-Sep-11 (No:11450)	Sep-12	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Calibrator Box V1.1	SE UMS 006 AB 1004	08-Jun-11 (in house check)	In house check: Jun-12
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																
Keithley Multimeter Type 2001	SN: 0810278	28-Sep-11 (No:11450)	Sep-12																
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																
Calibrator Box V1.1	SE UMS 006 AB 1004	08-Jun-11 (in house check)	In house check: Jun-12																
Calibrated by:	Name Andrea Gunti	Function Technician	Signature 																
Approved by:	Fin Bornholt	R&D Director																	
			Issued: November 22, 2011																
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																			

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

### Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
  - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
  - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
  - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
  - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
  - *Power consumption:* Typical value for information. Supply currents in various operating modes.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 161 of 168

### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.749 $\pm$ 0.1% (k=2)	404.733 $\pm$ 0.1% (k=2)	405.174 $\pm$ 0.1% (k=2)
Low Range	3.98175 $\pm$ 0.7% (k=2)	3.93601 $\pm$ 0.7% (k=2)	3.96830 $\pm$ 0.7% (k=2)

### Connector Angle

Connector Angle to be used in DASY system	90.0 $^{\circ}$ $\pm$ 1 $^{\circ}$
---	------------------------------------

# TA Technology (Shanghai) Co., Ltd.

## Test Report

### Appendix

#### 1. DC Voltage Linearity

High Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	199991.9	-0.91	-0.00
Channel X + Input	20000.28	0.48	0.00
Channel X - Input	-19998.51	0.59	-0.00
Channel Y + Input	200003.0	1.24	0.00
Channel Y + Input	19999.67	0.17	0.00
Channel Y - Input	-20000.04	-0.34	0.00
Channel Z + Input	200010.1	-0.11	-0.00
Channel Z + Input	19999.33	-0.07	-0.00
Channel Z - Input	-20001.45	-0.85	0.00

Low Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	2000.0	0.05	0.00
Channel X + Input	199.81	-0.09	-0.04
Channel X - Input	-199.63	0.37	-0.19
Channel Y + Input	1999.9	-0.22	-0.01
Channel Y + Input	198.81	-1.19	-0.59
Channel Y - Input	-201.62	-1.72	0.86
Channel Z + Input	2000.4	0.48	0.02
Channel Z + Input	199.30	-0.70	-0.35
Channel Z - Input	-200.86	-1.06	0.53

#### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading ( $\mu\text{V}$ )	Low Range Average Reading ( $\mu\text{V}$ )
Channel X	200	14.43	13.13
	-200	-12.22	-13.72
Channel Y	200	-10.07	-9.78
	-200	9.61	8.66
Channel Z	200	-0.56	-0.83
	-200	-0.01	0.11

#### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X ( $\mu\text{V}$ )	Channel Y ( $\mu\text{V}$ )	Channel Z ( $\mu\text{V}$ )
Channel X	200	-	3.08	0.09
Channel Y	200	3.19	-	4.59
Channel Z	200	0.90	-0.06	-

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RHA1204-0013HAC02R3

Page 163 of 168

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15920	15519
Channel Y	16179	17567
Channel Z	15791	15270

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M $\Omega$

	Average ( $\mu$ V)	min. Offset ( $\mu$ V)	max. Offset ( $\mu$ V)	Std. Deviation ( $\mu$ V)
Channel X	0.03	-1.16	2.66	0.46
Channel Y	-0.63	-3.22	0.29	0.46
Channel Z	-0.87	-2.03	0.28	0.46

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

#### 7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

#### 8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

#### 9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

## **ANNEX F: Product Change Description**

The mobile phone HUAWEI M866, M866, is a cdma2000 Digital Mobile Phone, which supports BC0, BC1 and BC15.

The mobile phone HUAWEI H866C, H866C is a cdma2000 Digital Mobile Phone, which supports BC0 and BC1.

M866 and H866C is consistent with the hardware, H866C less than the M866 BC15 this band, by the way of software, the two differ only in the software; The PCB of them is the same.

The difference between M866 and H866C is showed in the following table.

	HUAWEI M866, M866	HUAWEI H866C, H866C
supports bands	BC0, BC1 and BC15.	BC0, BC1
FLASH	the same	the same
PCB	the same	the same
Appearance	the same	the same
Bluetooth mode	the same	the same
WLAN mode	the same	the same
BT/ WLAN antenna	the same	the same
GSM/ WCDMA antenna	the same	the same
External camera	the same	the same
internal camera	the same	the same
Adapter	the same	the same
Battery	the same	the same
Chipset	the same	the same
Memory	the same	the same

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RHA1204-0013HAC02R3

Page 168 of 168

Form factor	Bar type, Internal antenna	Bar type, Internal antenna
RF Parameter	the same	the same
BT RF Parameter	the same	the same
Dimension	the same	the same
Weight	the same	the same
Bluetooth	the same	the same
External camera	the same	the same
Main Frequency NV	The same NV in the same band	The same NV in the same band
BT conducted power	the same	the same
WIFI conducted power	the same	the same