



Appendix B. SAR Measurement Plots

| Table of contents |
|--------------------------|
| CDMA 1700 MHz Head |
| CDMA 1700 MHz Body |

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 450CH Left hand touch cheek

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1732.5 MHz

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 39.986$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.35, 5.35, 5.35); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.634 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 6.060 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.1610

SAR(1 g) = 0.671 mW/g; SAR(10 g) = 0.381 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.749 mW/g

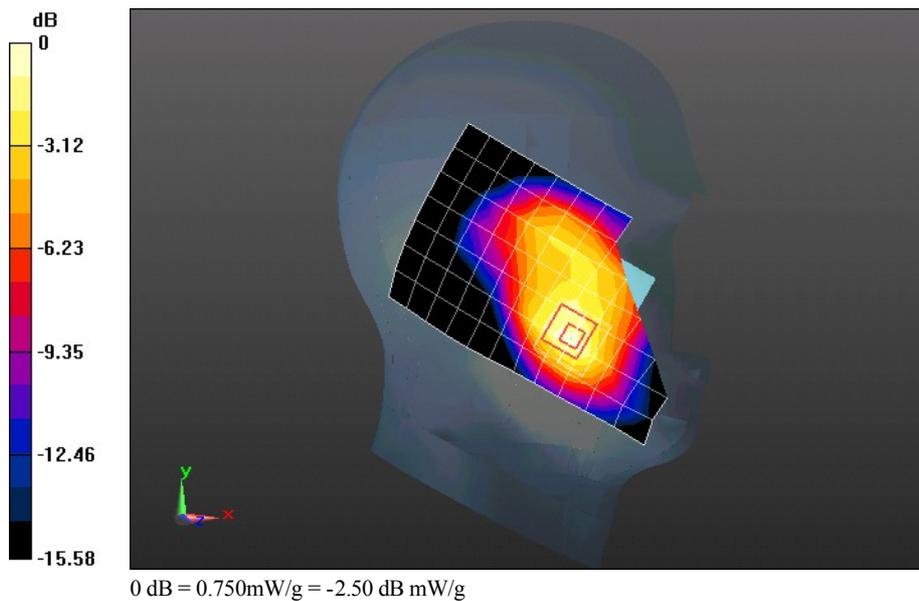

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 450CH Left hand tilt 15 degree

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1732.5 MHz

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 39.986$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.35, 5.35, 5.35); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.214 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 10.602 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.2980

SAR(1 g) = 0.203 mW/g; SAR(10 g) = 0.134 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.215 mW/g

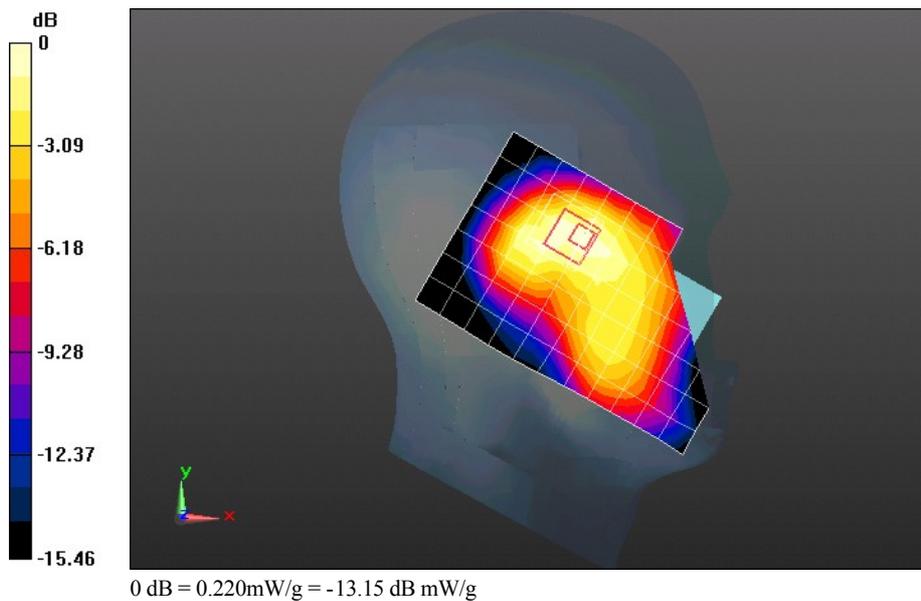

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 450CH Right hand touch cheek

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1732.5 MHz

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 39.986$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.35, 5.35, 5.35); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.639 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 6.539 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.0100

SAR(1 g) = 0.656 mW/g; SAR(10 g) = 0.414 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.714 mW/g

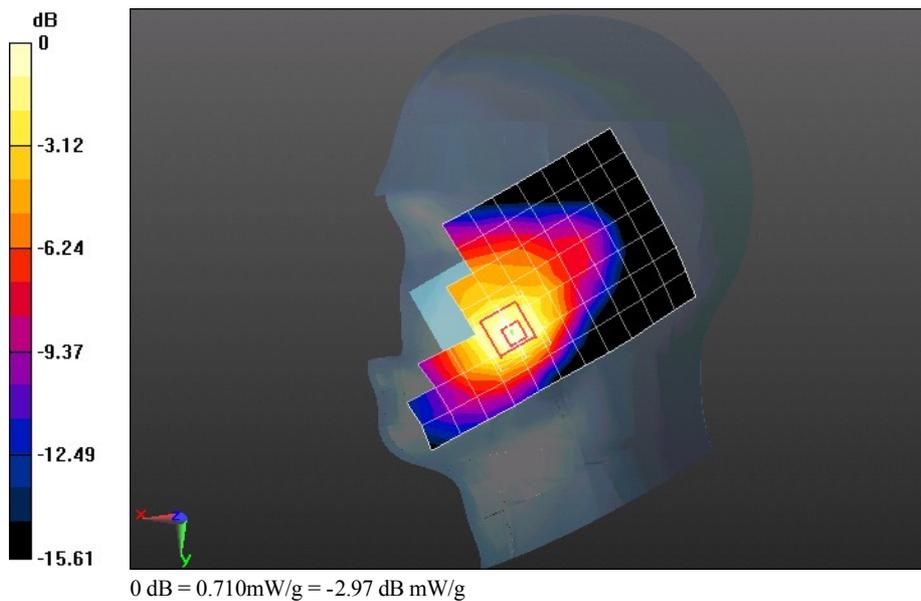

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 450CH Right hand tilt 15 degree

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1732.5 MHz

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 39.986$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.35, 5.35, 5.35); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.195 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 10.158 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.3140

SAR(1 g) = 0.197 mW/g; SAR(10 g) = 0.117 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.218 mW/g

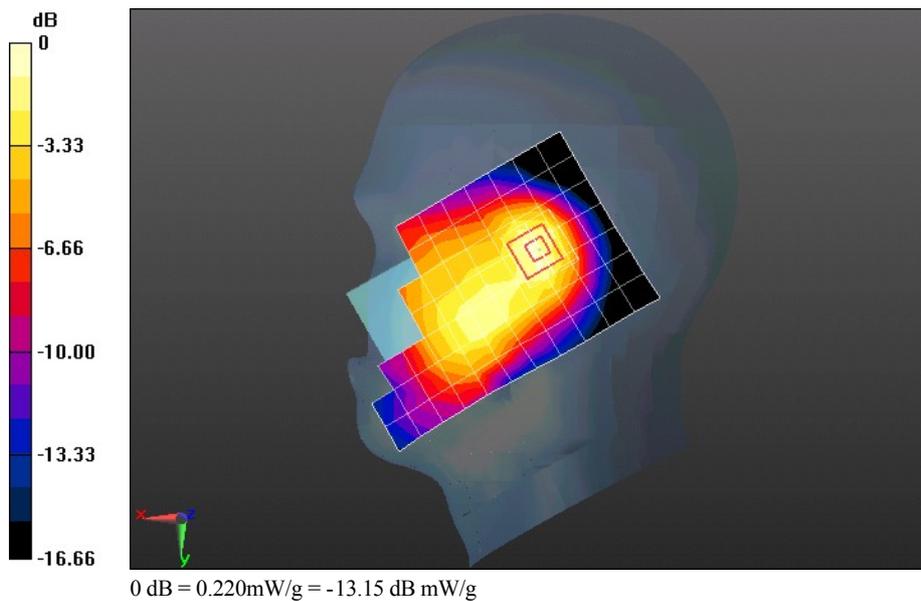

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 450CH Left hand touch check with Battery UAIBC16X03016246

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1732.5 MHz

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 39.986$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.35, 5.35, 5.35); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.592 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 5.999 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.0970

SAR(1 g) = 0.634 mW/g; SAR(10 g) = 0.361 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.707 mW/g

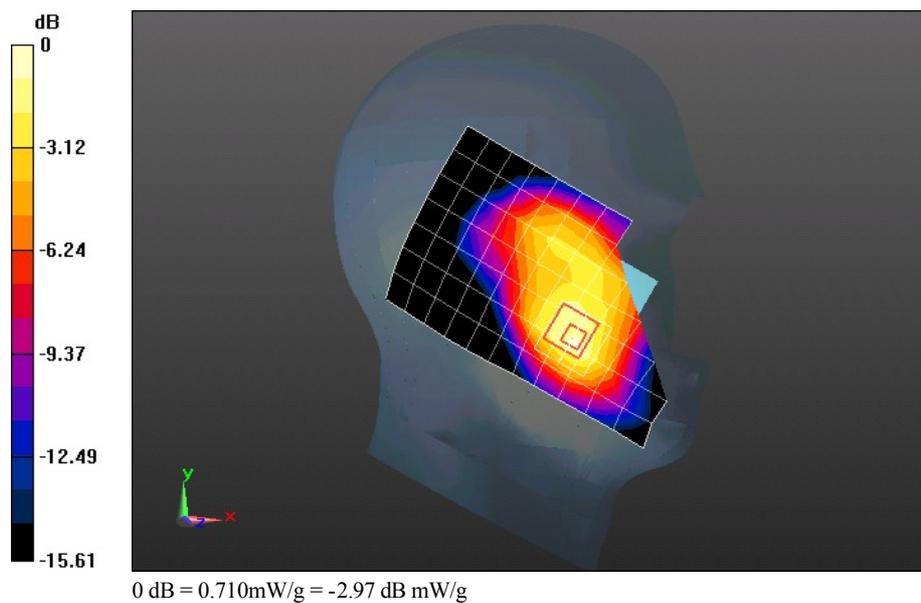

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 450CH Left hand touch check with Battery UNDC306X03000359**DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1**

Communication System: HW-CDMA2000; Frequency: 1732.5 MHz

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 39.986$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.35, 5.35, 5.35); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.629 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.324 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.1760

SAR(1 g) = 0.677 mW/g; SAR(10 g) = 0.382 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.756 mW/g

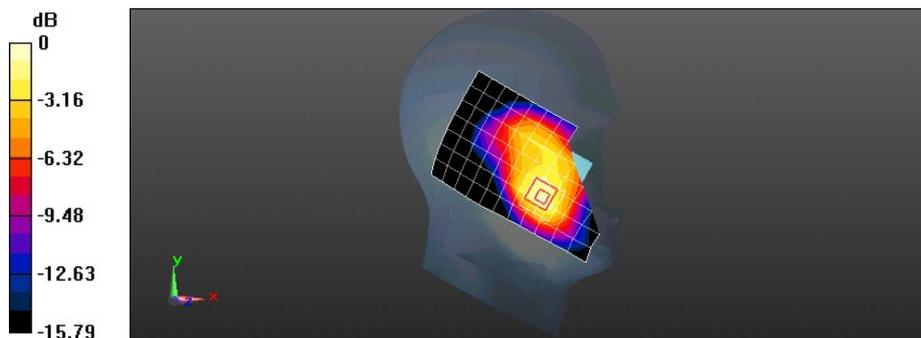

0 dB = 0.760mW/g = -2.38 dB mW/g

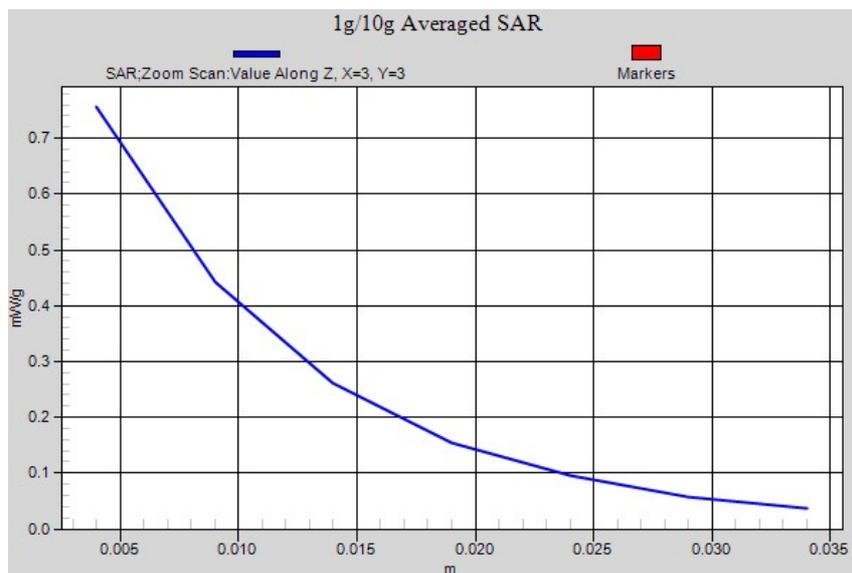

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 450CH Left hand touch cheek with Battery MHCBB066I4437395

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1732.5 MHz

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 39.986$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.35, 5.35, 5.35); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.611 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 6.527 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.1700

SAR(1 g) = 0.674 mW/g; SAR(10 g) = 0.380 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.754 mW/g

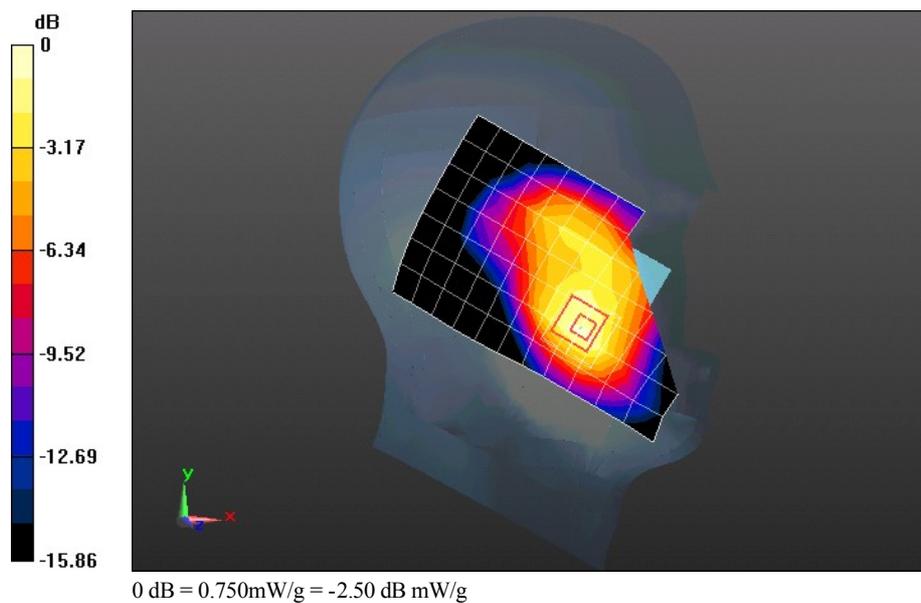

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 450CH Towards Phantom 10mm with EVDO Rev.0

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1732.5 MHz

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 51.891$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.79, 4.79, 4.79); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.682 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 13.335 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.0520

SAR(1 g) = 0.599 mW/g; SAR(10 g) = 0.353 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.654 mW/g

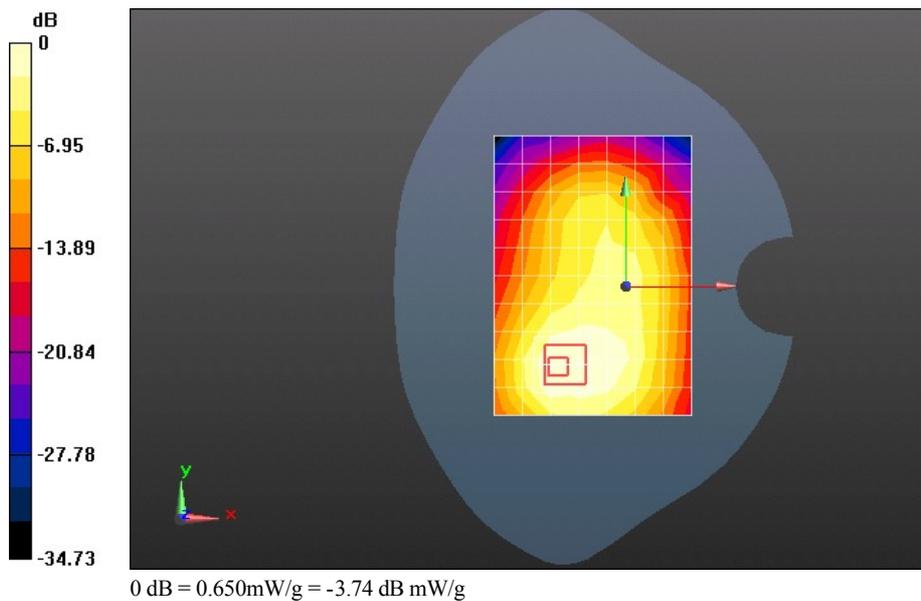

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 25CH Towards Ground 10mm with EVDO Rev.0

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1711.25 MHz

Medium parameters used (interpolated): $f = 1711.25$ MHz; $\sigma = 1.473$ mho/m; $\epsilon_r = 51.976$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.79, 4.79, 4.79); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.969 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 17.632 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.7190

SAR(1 g) = 0.963 mW/g; SAR(10 g) = 0.562 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.070 mW/g

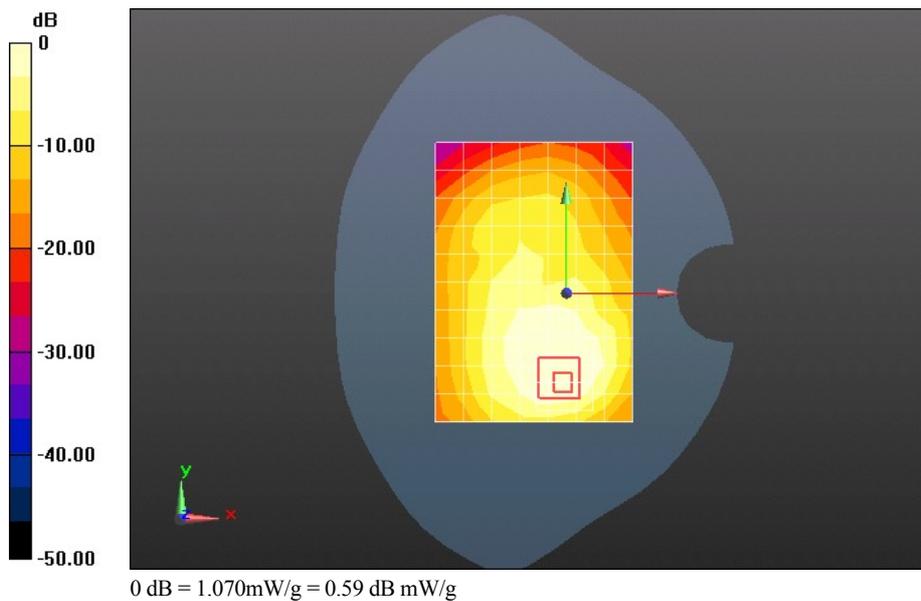

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 450CH Towards Ground 10mm with EVDO Rev.0

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1732.5 MHz

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 51.891$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.79, 4.79, 4.79); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.861 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 16.004 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.6960

SAR(1 g) = 0.897 mW/g; SAR(10 g) = 0.526 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.972 mW/g

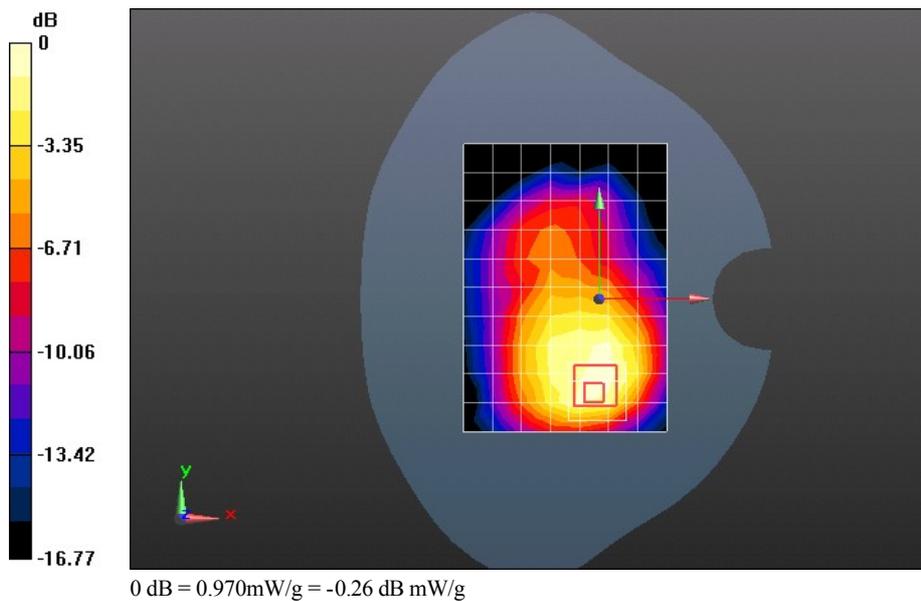

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 850CH Towards Ground 10mm with EVDO Rev.0

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1752.5 MHz

Medium parameters used (interpolated): $f = 1752.5$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 51.794$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.79, 4.79, 4.79); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.857 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 15.793 V/m; Power Drift = 0.0029 dB

Peak SAR (extrapolated) = 1.3770

SAR(1 g) = 0.830 mW/g; SAR(10 g) = 0.492 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.904 mW/g

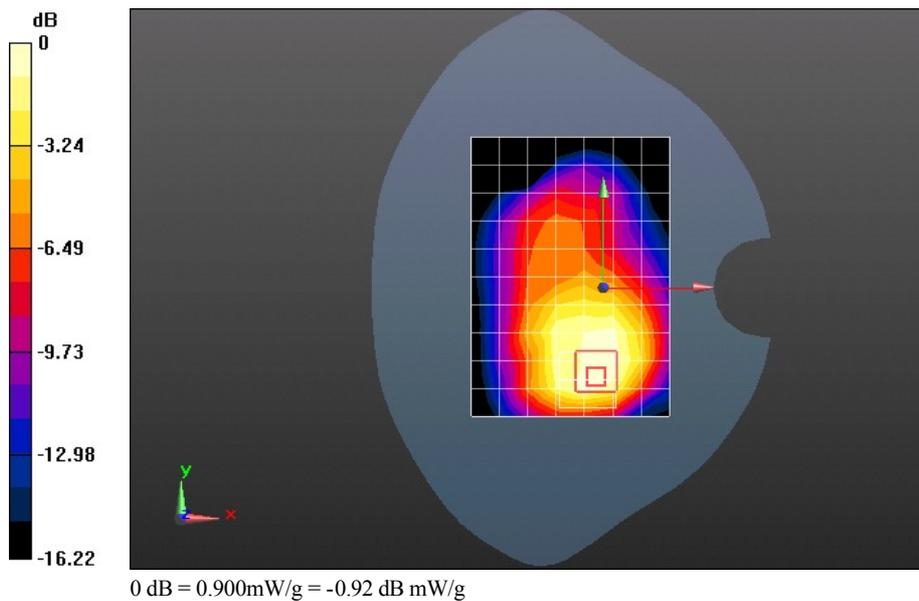

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 450CH Left edge 10mm with EVDO Rev.0

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1732.5 MHz

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 51.891$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.79, 4.79, 4.79); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.289 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 9.487 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.4080

SAR(1 g) = 0.245 mW/g; SAR(10 g) = 0.138 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.272 mW/g

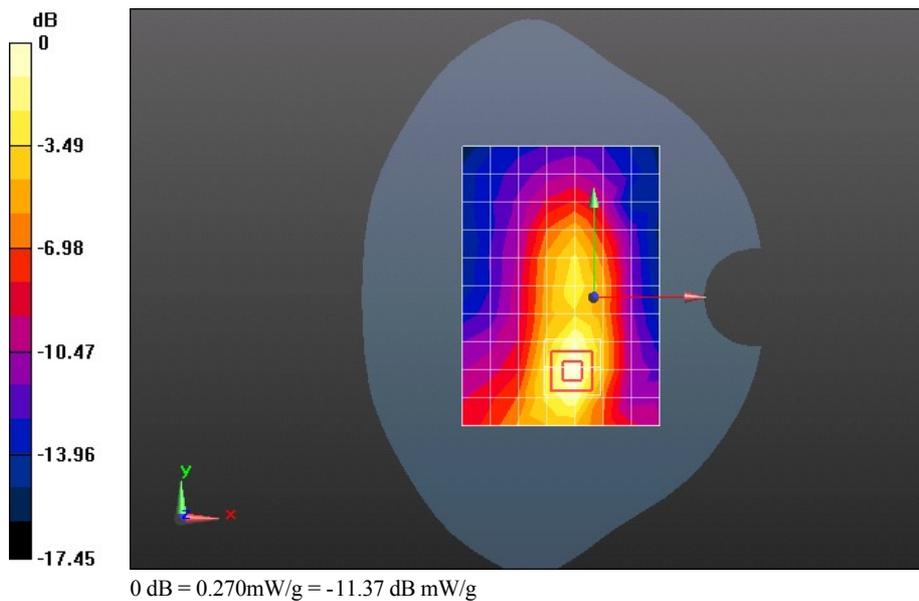

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 450CH Right edge 10mm with EVDO Rev.0

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1732.5 MHz

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 51.891$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.79, 4.79, 4.79); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.146 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 10.364 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.2430

SAR(1 g) = 0.149 mW/g; SAR(10 g) = 0.090 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.161 mW/g

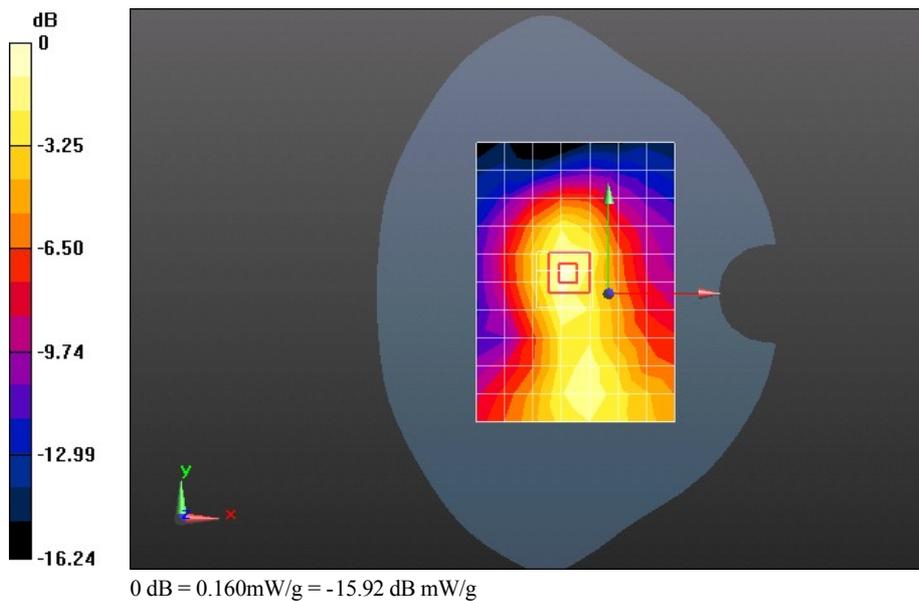

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 450CH Bottom edge 10mm with EVDO Rev.0

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1732.5 MHz

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 51.891$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.79, 4.79, 4.79); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.667 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 23.533 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.1670

SAR(1 g) = 0.718 mW/g; SAR(10 g) = 0.415 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.780 mW/g

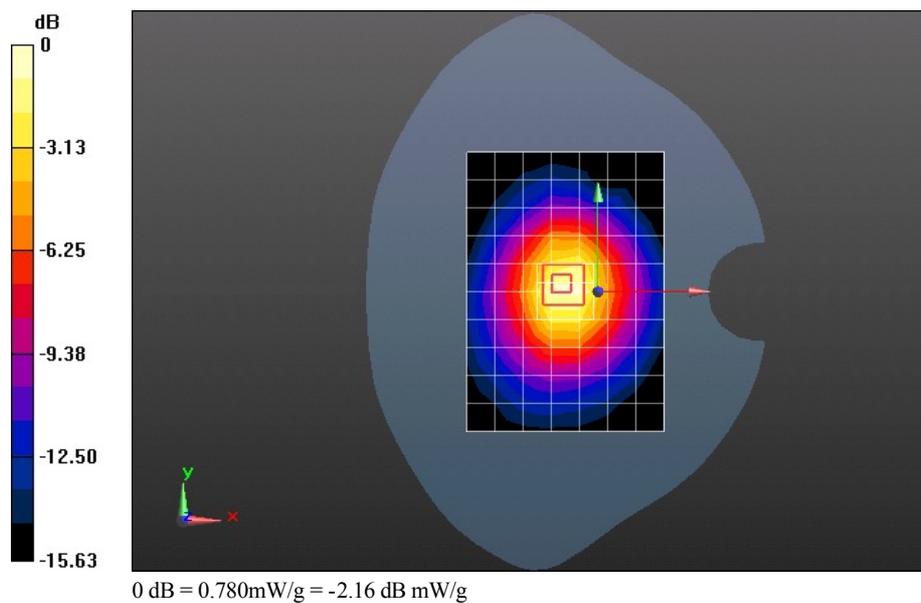

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 25CH Towards Ground 10mm with EVDO Rev.A**DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1**

Communication System: HW-CDMA2000; Frequency: 1711.25 MHz

Medium parameters used (interpolated): $f = 1711.25$ MHz; $\sigma = 1.473$ mho/m; $\epsilon_r = 51.976$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.79, 4.79, 4.79); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.264 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.889 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.9840

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.669 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.292 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.889 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.7190

SAR(1 g) = 0.876 mW/g; SAR(10 g) = 0.540 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.080 mW/g

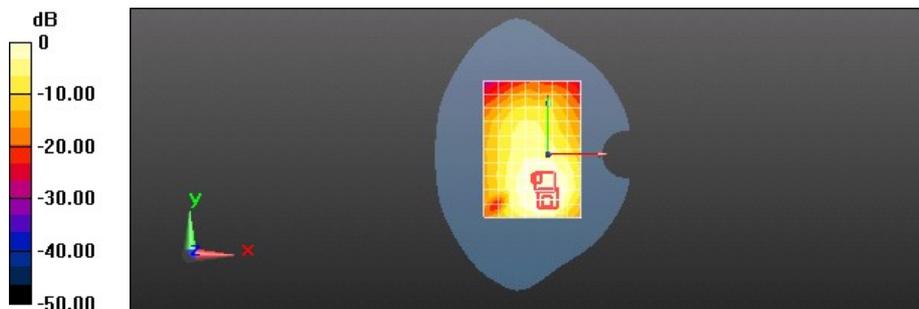

0 dB = 1.080mW/g = 0.67 dB mW/g

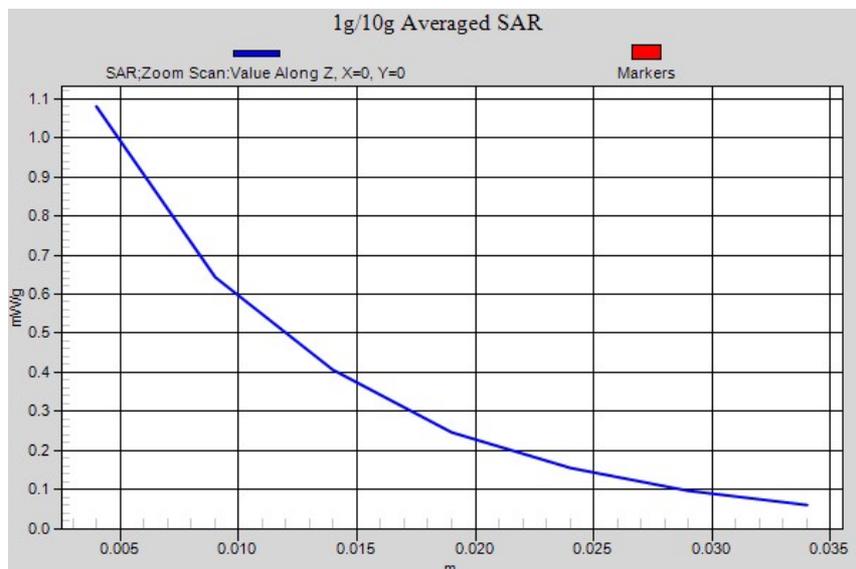

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 25CH Towards Ground 10mm with 1XRTT

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1711.25 MHz

Medium parameters used (interpolated): $f = 1711.25$ MHz; $\sigma = 1.473$ mho/m; $\epsilon_r = 51.976$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.79, 4.79, 4.79); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.043 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 18.077 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.6660

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.609 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.142 mW/g

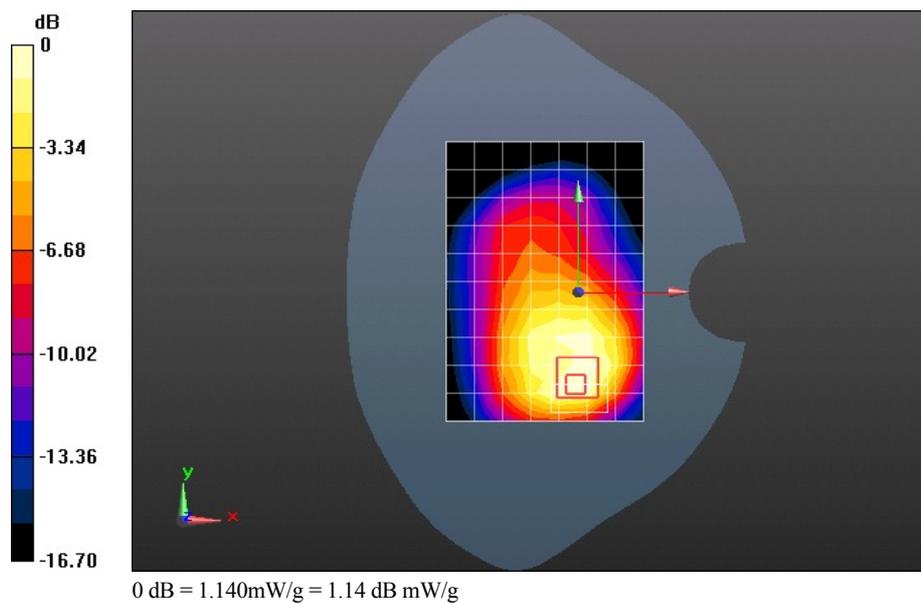

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 25CH Towards Ground 10mm with 1XRTT and Handset

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1711.25 MHz

Medium parameters used (interpolated): $f = 1711.25$ MHz; $\sigma = 1.473$ mho/m; $\epsilon_r = 51.976$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.79, 4.79, 4.79); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.979 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 17.754 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.5790

SAR(1 g) = 0.985 mW/g; SAR(10 g) = 0.587 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.086 mW/g

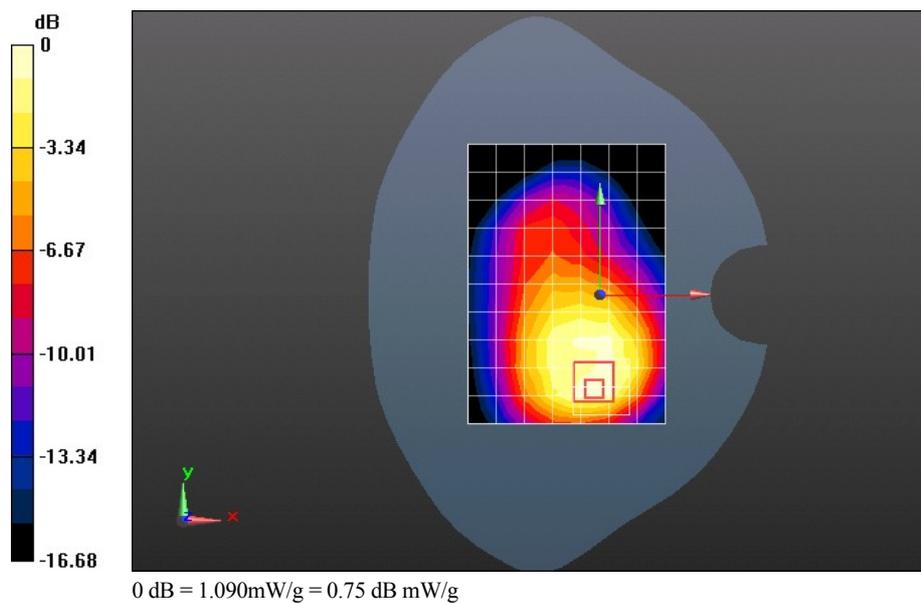

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 25CH Towards Ground 10mm with EVDO Rev.A and Battery UAIBC16X03016246

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1711.25 MHz

Medium parameters used (interpolated): $f = 1711.25$ MHz; $\sigma = 1.473$ mho/m; $\epsilon_r = 51.976$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.79, 4.79, 4.79); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.261 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 17.423 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.8190

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.654 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.343 mW/g

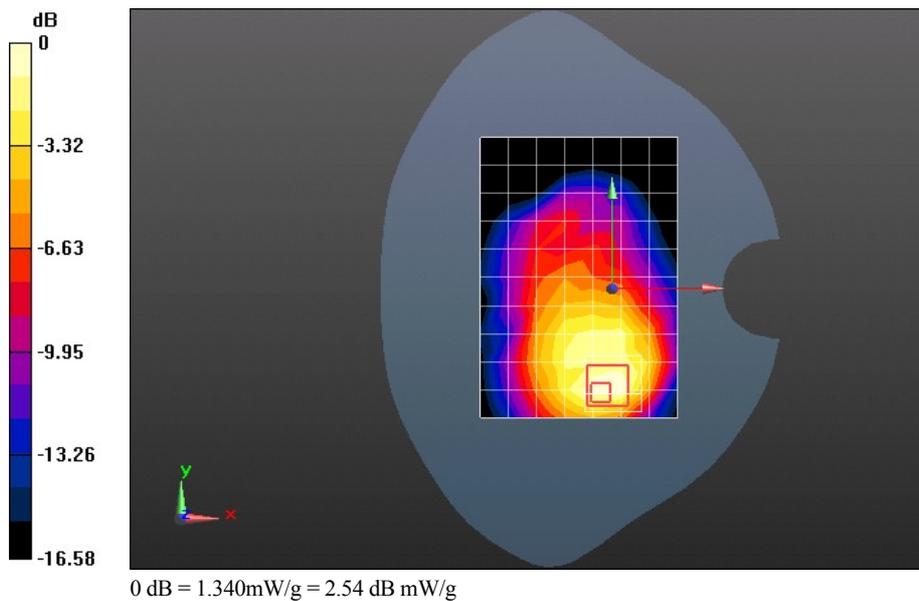

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 25CH Towards Ground 10mm with EVDO Rev.A and Battery UNDC306X03000359

DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1

Communication System: HW-CDMA2000; Frequency: 1711.25 MHz

Medium parameters used (interpolated): $f = 1711.25$ MHz; $\sigma = 1.473$ mho/m; $\epsilon_r = 51.976$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.79, 4.79, 4.79); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.260 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 12.664 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.9810

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.664 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.298 mW/g

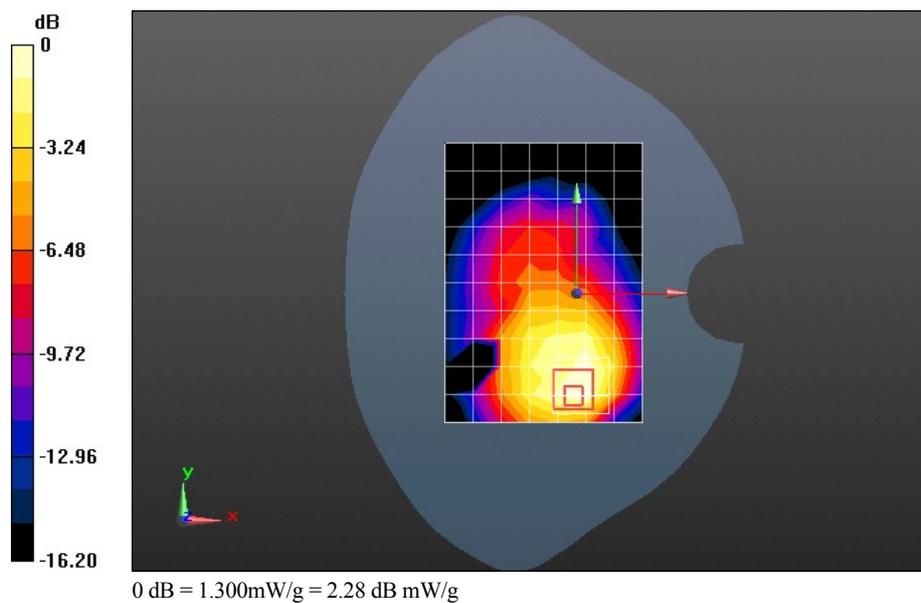

Test Laboratory: HUAWEI SAR Lab

M866 CDMA1700 25CH Towards Ground 10mm with EVDO Rev.A and Battery MHCBB066I4437395**DUT: M866; Type: cdma2000 Digital Mobile Phone; Serial: SAR1**

Communication System: HW-CDMA2000; Frequency: 1711.25 MHz

Medium parameters used (interpolated): $f = 1711.25$ MHz; $\sigma = 1.473$ mho/m; $\epsilon_r = 51.976$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.79, 4.79, 4.79); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.241 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.032 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.0750

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.671 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.236 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.032 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.9210

SAR(1 g) = 0.923 mW/g; SAR(10 g) = 0.517 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.100 mW/g

