



Appendix A. System Check Plots

Table of contents
SystemPerformanceCheck-D750-EX-Head
SystemPerformanceCheck-D750-EX-Body
SystemPerformanceCheck-D835-EX-Head
SystemPerformanceCheck-D835-EX-Head
SystemPerformanceCheck-D835-EX-Head
SystemPerformanceCheck-D835-EX-Head
SystemPerformanceCheck-D835-EX-Body
SystemPerformanceCheck-D835-EX-Body
SystemPerformanceCheck-D1750-EX-Head
SystemPerformanceCheck-D1750-EX-Body
SystemPerformanceCheck-D1900-EX-Head
SystemPerformanceCheck-D1900-ES-Head
SystemPerformanceCheck-D1900-EX-Head
SystemPerformanceCheck-D1900-EX-Body
SystemPerformanceCheck-D1900-EX-Body
SystemPerformanceCheck-D1900-EX-Body
SystemPerformanceCheck-D2450-ES-Head
SystemPerformanceCheck-D2450-ES-Body
SystemPerformanceCheck-D2600-ES-Head
SystemPerformanceCheck-D2600-ES-Body
SystemPerformanceCheck-D5250-EX-Head
SystemPerformanceCheck-D5250-EX-Body
SystemPerformanceCheck-D5600-EX-Head
SystemPerformanceCheck-D5600-EX-Body
SystemPerformanceCheck-D5750-EX-Head
SystemPerformanceCheck-D5750-EX-Body

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D750-EX-Head

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1132


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 750$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.171$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- ⊘ Probe: EX3DV4 - SN3744; ConvF(9.7, 9.7, 9.7); Calibrated: 2016-7-26;
- ⊘ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⊘ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⊘ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ⊘ DASY52 52.8.8(1222);

Configuration/d=15mm, Pin=250mW/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 2.64 W/kg

Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 50.72 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 3.19 W/kg
SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.41 W/kg
 Maximum value of SAR (measured) = 2.85 W/kg

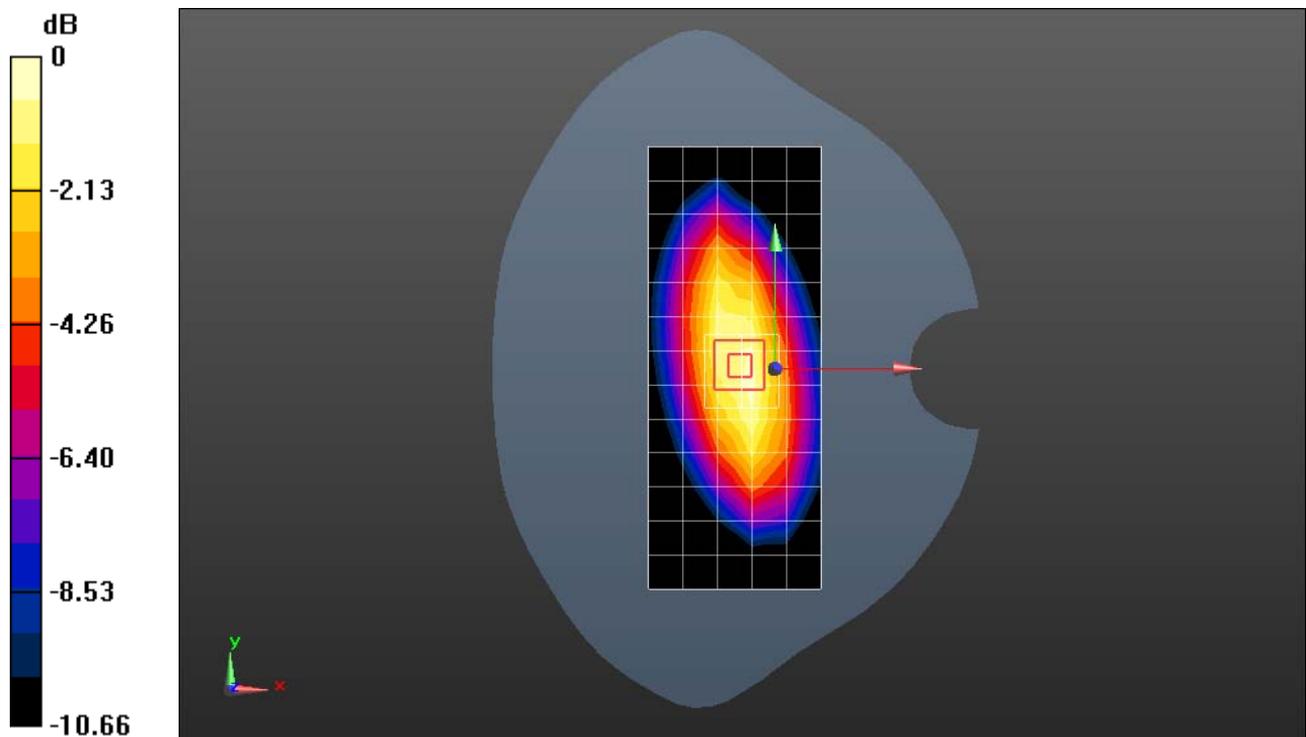

0 dB = 2.85 W/kg = 4.55 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D750-EX-Body

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1132


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 750$ MHz; $\sigma = 0.976$ S/m; $\epsilon_r = 53.698$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- ⌵ Probe: EX3DV4 - SN3744; ConvF(9.03, 9.03, 9.03); Calibrated: 2016-7-26;
- ⌵ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌵ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌵ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ⌵ DASY52 52.8.8(1222);

Configuration/d=15mm, Pin=250mW/Area Scan (6x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 2.77 W/kg

Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
 Reference Value = 48.40 V/m; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 3.40 W/kg
 SAR(1 g) = 2.2 W/kg; SAR(10 g) = 1.44 W/kg
 Maximum value of SAR (measured) = 3.00 W/kg

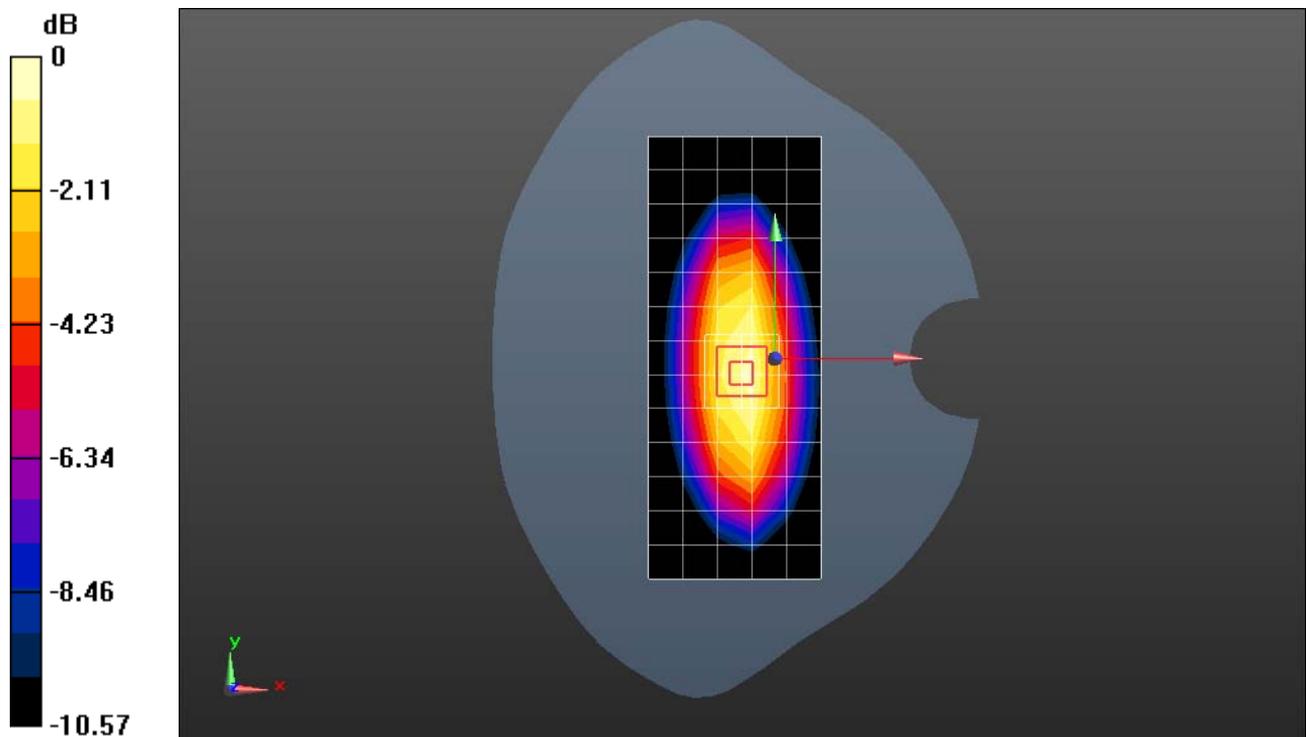

0 dB = 3.00 W/kg = 4.77 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D835-EX-Head

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d059

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 40.477$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ⌵ Probe: EX3DV4 - SN3744; ConvF(8.86, 8.86, 8.86); Calibrated: 2016-7-26;
- ⌵ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌵ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌵ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ⌵ DASY52 52.8.8(1222);

Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.96 W/kg

Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 52.47 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 3.62 W/kg
SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.55 W/kg
Maximum value of SAR (measured) = 3.20 W/kg

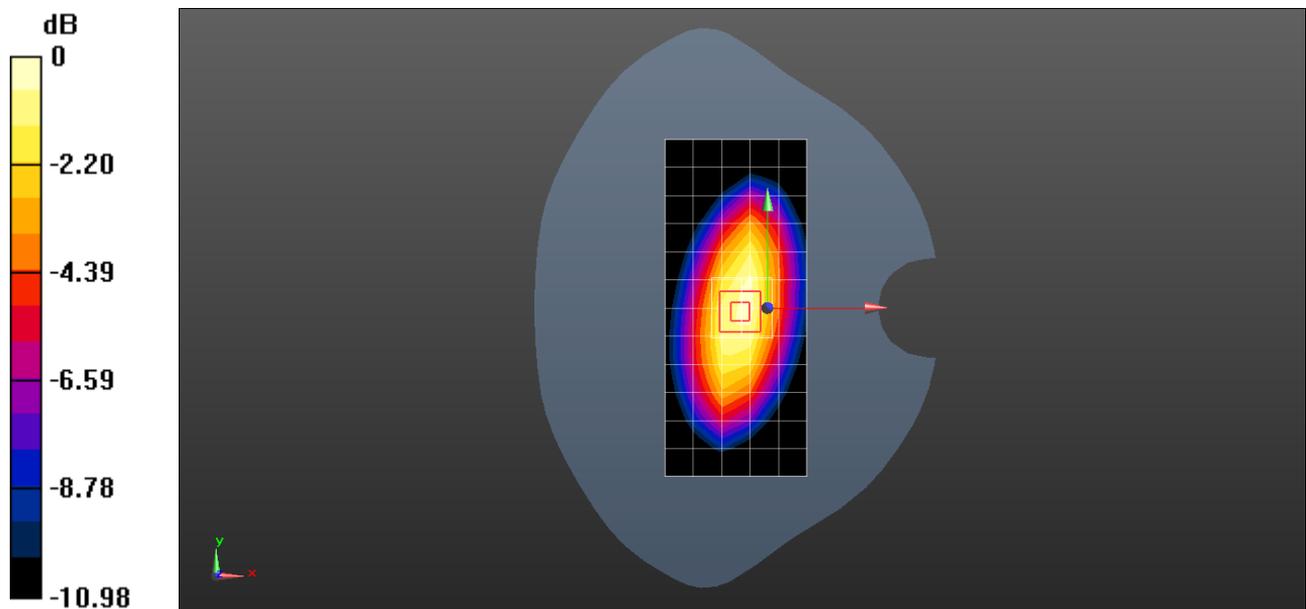

0 dB = 3.20 W/kg = 5.05 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D835-EX-Head

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d059

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.915 \text{ S/m}$; $\epsilon_r = 40.627$; $\rho = 1000 \text{ kg/m}^3$


Phantom section: Flat Section

DASY Configuration:

- ⌵ Probe: EX3DV4 - SN3736; ConvF(9.17, 9.17, 9.17); Calibrated: 2016-4-26;
- ⌵ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌵ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌵ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ⌵ DASY52 52.8.8(1222);

Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 3.01 W/kg

Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 54.11 V/m; Power Drift = -0.13 dB
 Peak SAR (extrapolated) = 3.94 W/kg
SAR(1 g) = 2.5 W/kg; SAR(10 g) = 1.62 W/kg
 Maximum value of SAR (measured) = 3.42 W/kg

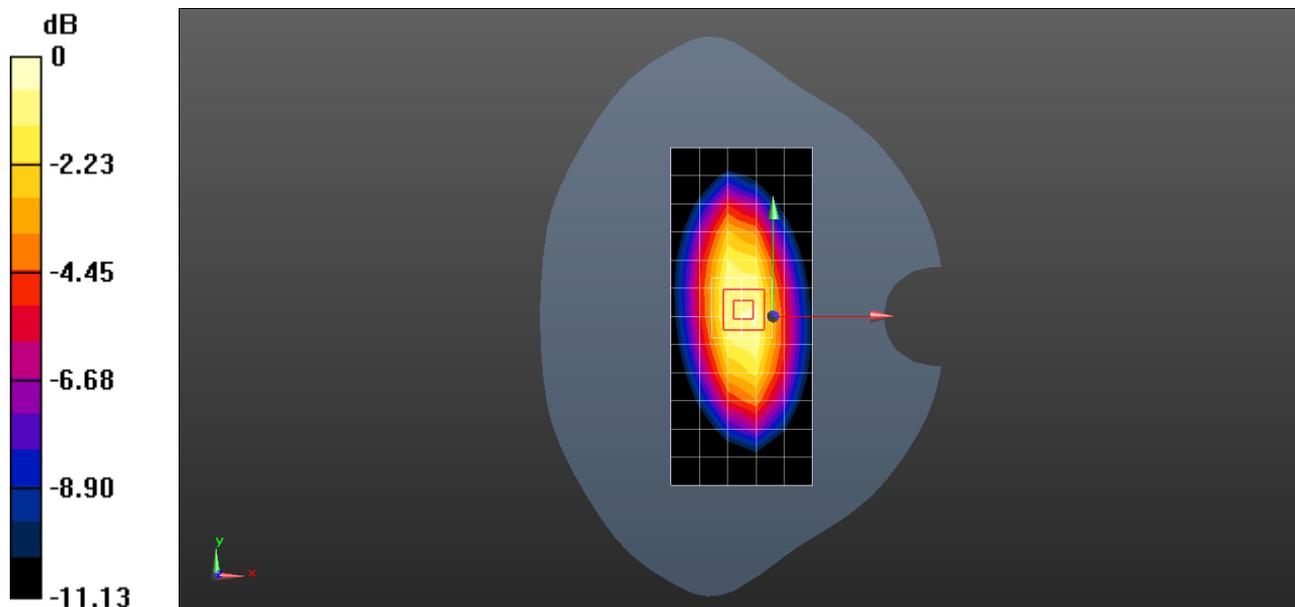

0 dB = 3.42 W/kg = 5.34 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D835-EX-Head

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d059

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 40.707$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ⌵ Probe: EX3DV4 - SN3736; ConvF(9.17, 9.17, 9.17); Calibrated: 2016-4-26;
- ⌵ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌵ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌵ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ⌵ DASY52 52.8.8(1222);

Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.91 W/kg

Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 53.49 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 3.84 W/kg
SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.57 W/kg
Maximum value of SAR (measured) = 3.34 W/kg

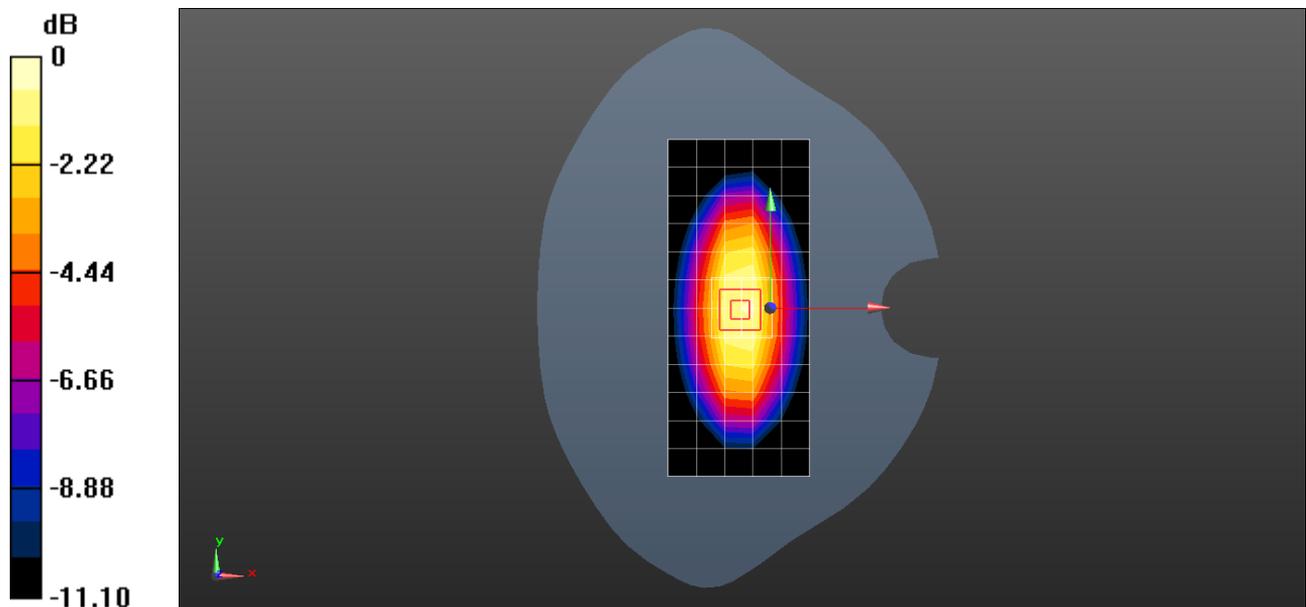

0 dB = 3.34 W/kg = 5.24 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D835-EX-Head

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d059

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 42.191$; $\rho = 1000 \text{ kg/m}^3$


Phantom section: Flat Section

DASY Configuration:

- ⌵ Probe: EX3DV4 - SN3736; ConvF(9.17, 9.17, 9.17); Calibrated: 2016-4-26;
- ⌵ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌵ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌵ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ⌵ DASY52 52.8.8(1222);

Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 3.20 W/kg

Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$,
 $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 52.62 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 3.98 W/kg
SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.6 W/kg
 Maximum value of SAR (measured) = 3.43 W/kg

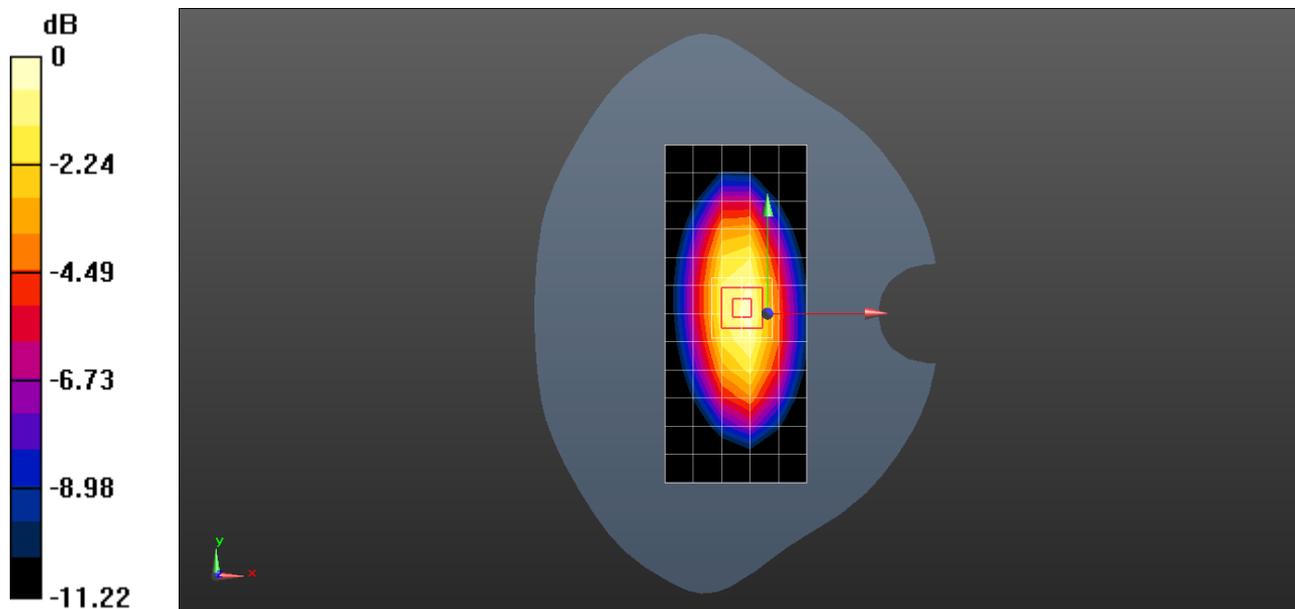

0 dB = 3.43 W/kg = 5.35 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D835-EX-Body

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d059

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.97$ S/m; $\epsilon_r = 54.546$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ⌘ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌘ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌘ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ⌘ DASY52 52.8.8(1222);

Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 2.86 W/kg

Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 52.91 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 3.76 W/kg
SAR(1 g) = 2.5 W/kg; SAR(10 g) = 1.63 W/kg
Maximum value of SAR (measured) = 3.35 W/kg

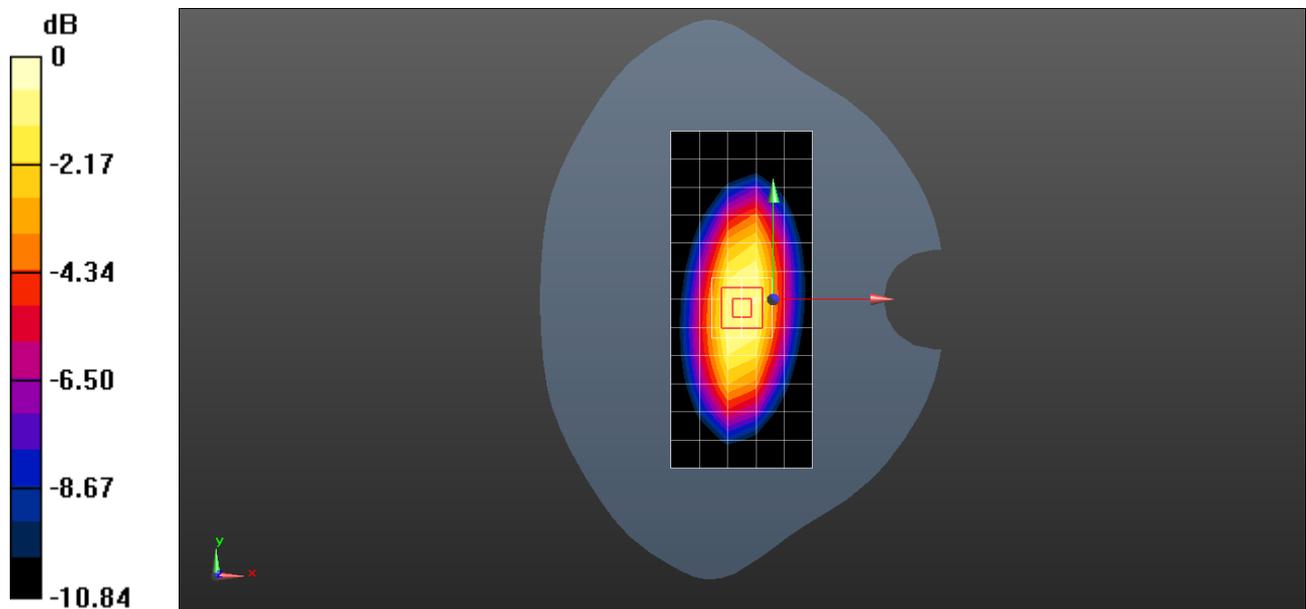

0 dB = 3.35 W/kg = 5.25 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D835-EX-Body

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d059

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.993$ S/m; $\epsilon_r = 54.346$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ⌄ Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ⌄ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌄ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌄ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ⌄ DASY52 52.8.8(1222);

Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 3.10 W/kg

Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 52.39 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 3.86 W/kg
SAR(1 g) = 2.51 W/kg; SAR(10 g) = 1.63 W/kg
 Maximum value of SAR (measured) = 3.40 W/kg

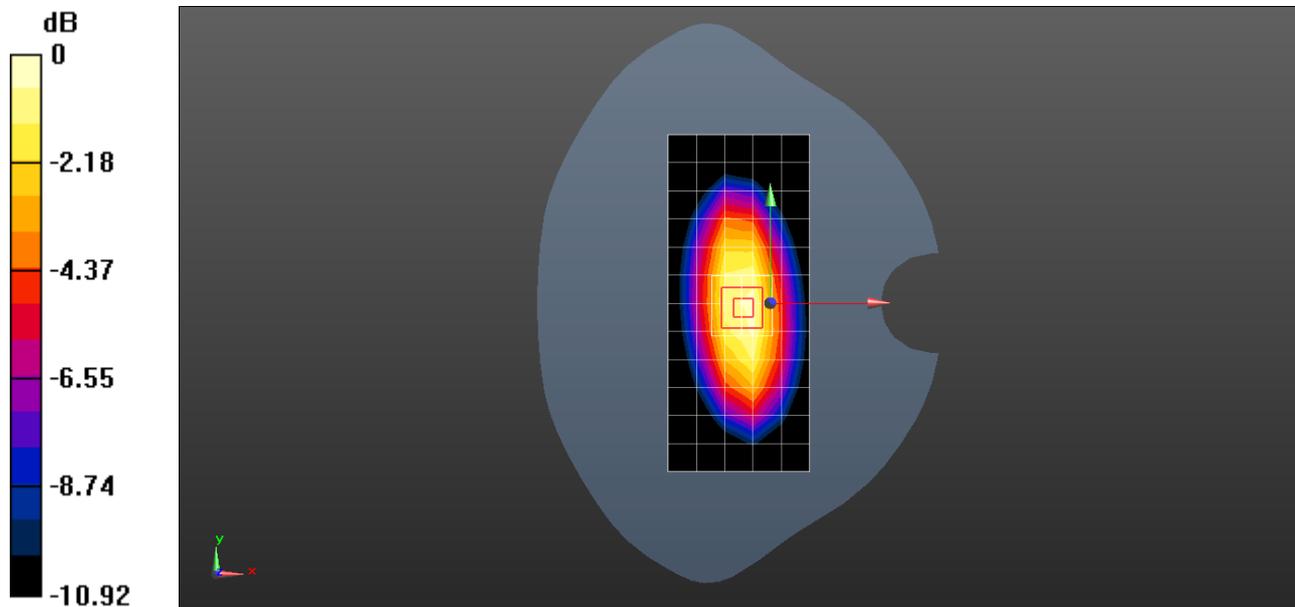

0 dB = 3.40 W/kg = 5.31 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

System Performance Check-D1750-EX-Head

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1123

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.359$ S/m; $\epsilon_r = 40.548$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: EX3DV4 - SN3744; ConvF(8.09, 8.09, 8.09); Calibrated: 2016-7-26;
- ⌘ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌘ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌘ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ⌘ DASY52 52.8.8(1222);

Configuration/d=10mm pin=250mW/Area Scan (6x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 8.41 W/kg

Configuration/d=10mm pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 81.49 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 15.1 W/kg
SAR(1 g) = 8.29 W/kg; SAR(10 g) = 4.38 W/kg
Maximum value of SAR (measured) = 10.5 W/kg

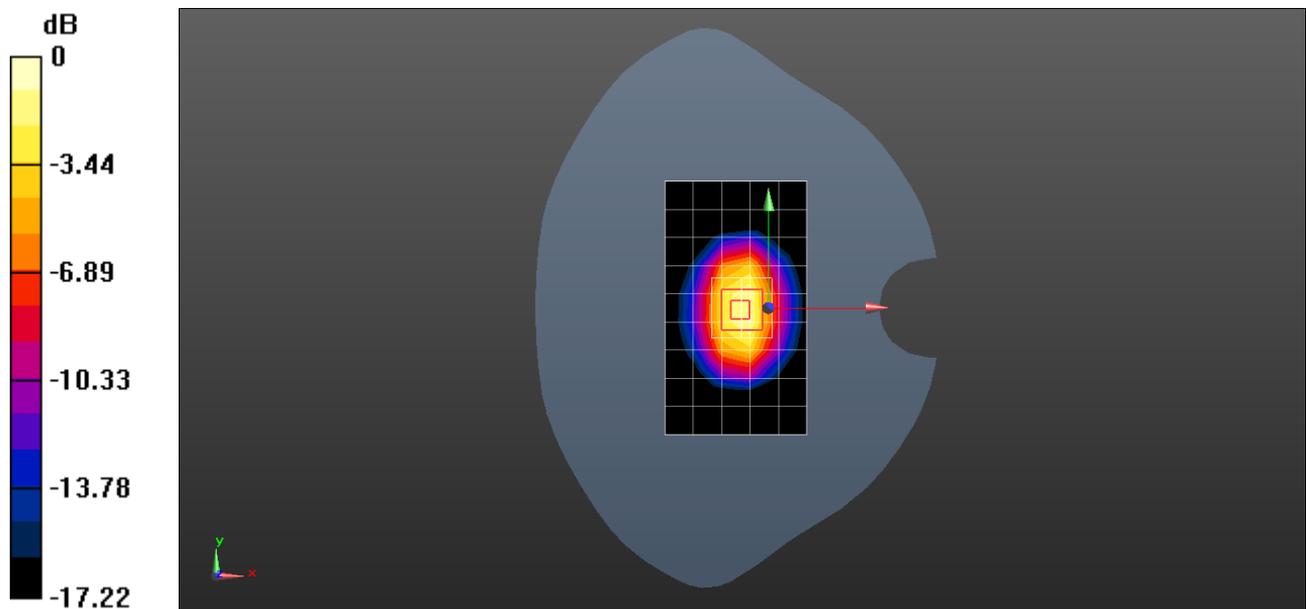

0 dB = 10.5 W/kg = 10.21 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D1750-EX-Body

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1123

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.433$ S/m; $\epsilon_r = 51.702$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ⌘ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌘ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌘ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ⌘ DASY52 52.8.8(1222);

Configuration/d=10mm pin=250mW/Area Scan (6x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 9.02 W/kg

Configuration/d=10mm pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
 Reference Value = 81.81 V/m; Power Drift = -0.16 dB
 Peak SAR (extrapolated) = 16.1 W/kg
SAR(1 g) = 9.16 W/kg; SAR(10 g) = 4.92 W/kg
 Maximum value of SAR (measured) = 11.4 W/kg

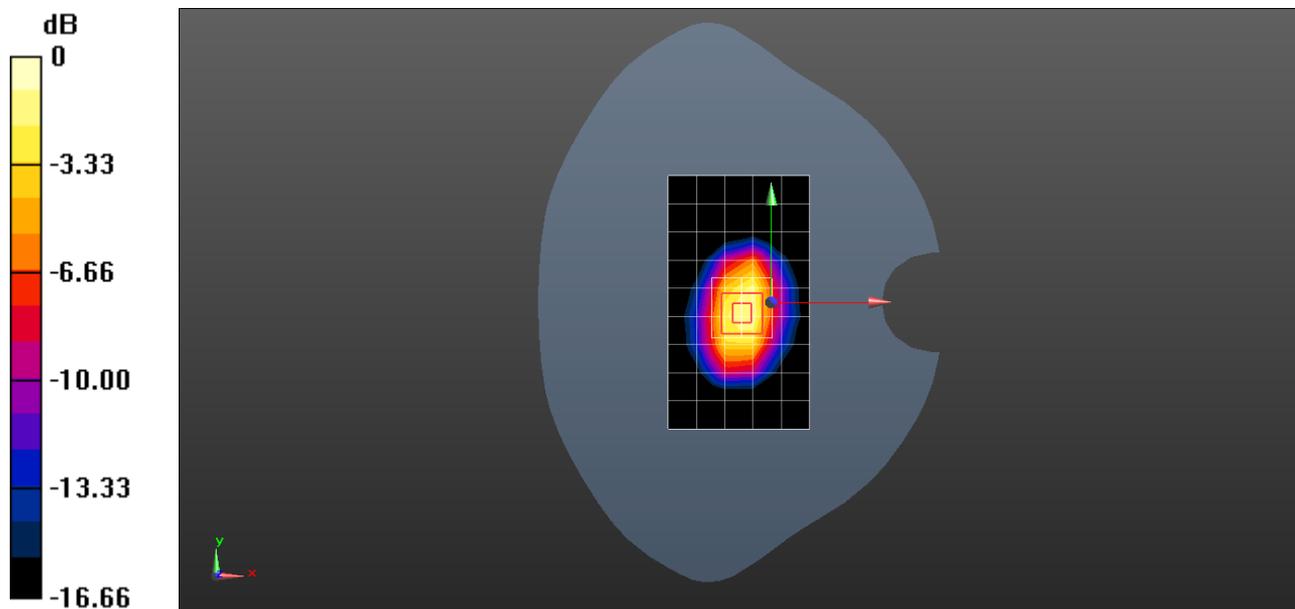

0 dB = 11.4 W/kg = 10.57 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-1900-EX-Head

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d091

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 39.781$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ⌄ Probe: EX3DV4 - SN3744; ConvF(7.74, 7.74, 7.74); Calibrated: 2016-7-26;
- ⌄ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌄ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌄ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ⌄ DASY52 52.8.8(1222);

Configuration/d=10mm, Pin=250mW/Area Scan (6x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 14.4 W/kg

Configuration/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 85.98 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 19.8 W/kg
SAR(1 g) = 10.5 W/kg; SAR(10 g) = 5.41 W/kg
Maximum value of SAR (measured) = 16.5 W/kg

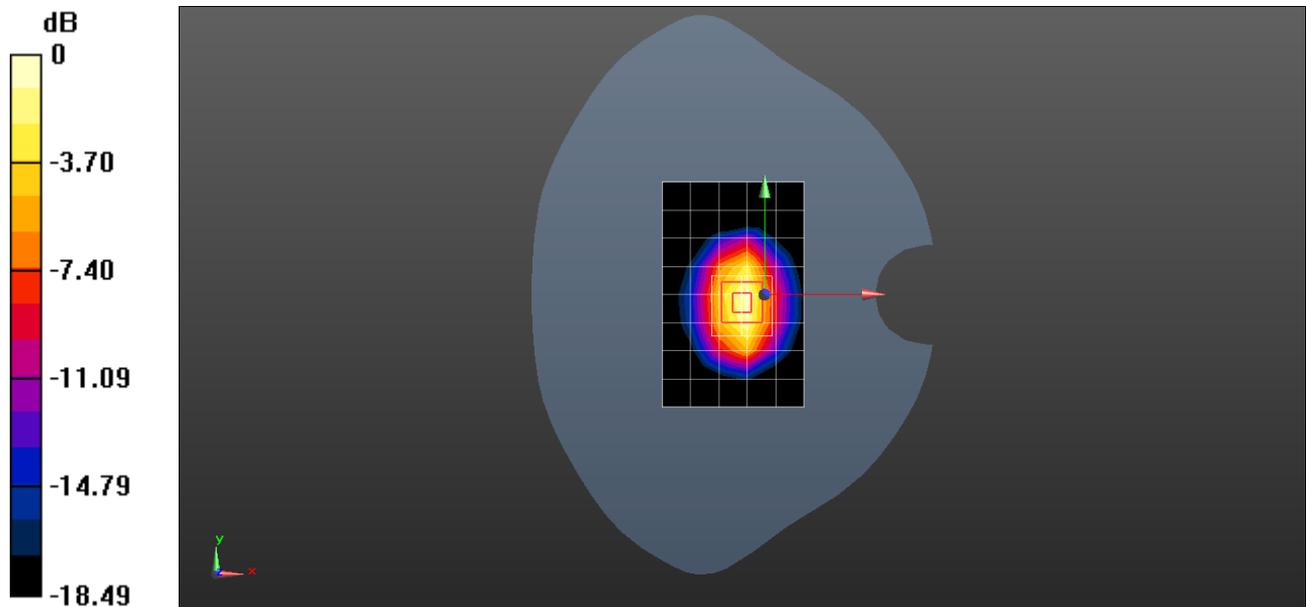

0 dB = 16.5 W/kg = 12.17 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-1900-ES-Head

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d091

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 39.661$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: ES3DV3 - SN3168; ConvF(5.13, 5.13, 5.13); Calibrated: 2015-9-28;
- ⌘ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ⌘ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌘ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ⌘ DASY52 52.8.8(1222);

Configuration/d=10mm, Pin=250mW/Area Scan (6x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 9.74 W/kg

Configuration/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 95.04 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 18.7 W/kg
SAR(1 g) = 10.2 W/kg; SAR(10 g) = 5.34 W/kg
Maximum value of SAR (measured) = 13.0 W/kg

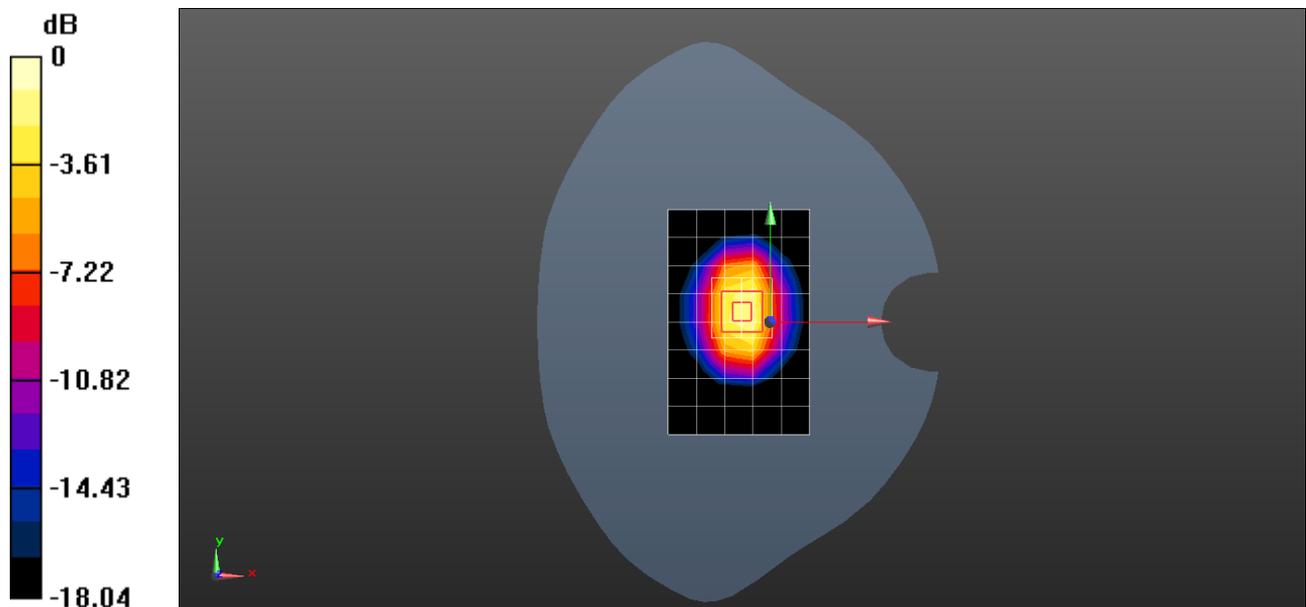

0 dB = 13.0 W/kg = 11.14 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-1900-EX-Head

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d091


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.425$ S/m; $\epsilon_r = 38.798$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- ⌵ Probe: EX3DV4 - SN3736; ConvF(7.45, 7.45, 7.45); Calibrated: 2016-4-26;
- ⌵ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌵ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌵ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ⌵ DASY52 52.8.8(1222);

Configuration/d=10mm, Pin=250mW/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 12.7 W/kg

Configuration/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 90.68 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 20.1 W/kg
SAR(1 g) = 10.7 W/kg; SAR(10 g) = 5.56 W/kg
 Maximum value of SAR (measured) = 16.8 W/kg

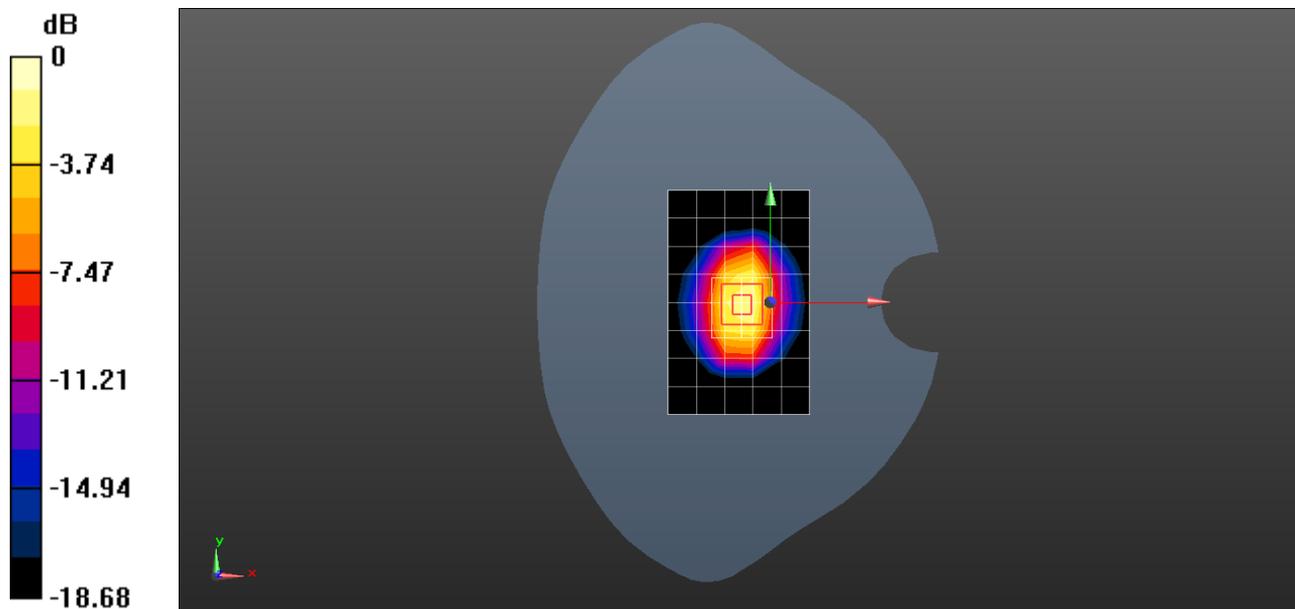

0 dB = 16.8 W/kg = 12.26 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-1900-EX-Body

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d091


Communication System: UID 0, CW (0); Frequency: 1900 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.559$ S/m; $\epsilon_r = 52.888$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: EX3DV4 - SN3736; ConvF(7.15, 7.15, 7.15); Calibrated: 2016-4-26;
- ⌘ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌘ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌘ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ⌘ DASY52 52.8.8(1222);

Configuration/d=10mm, Pin=250mW/Area Scan (6x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 13.2 W/kg

Configuration/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
 Reference Value = 86.46 V/m; Power Drift = -0.18 dB
 Peak SAR (extrapolated) = 18.7 W/kg
SAR(1 g) = 10.5 W/kg; SAR(10 g) = 5.54 W/kg
 Maximum value of SAR (measured) = 15.7 W/kg

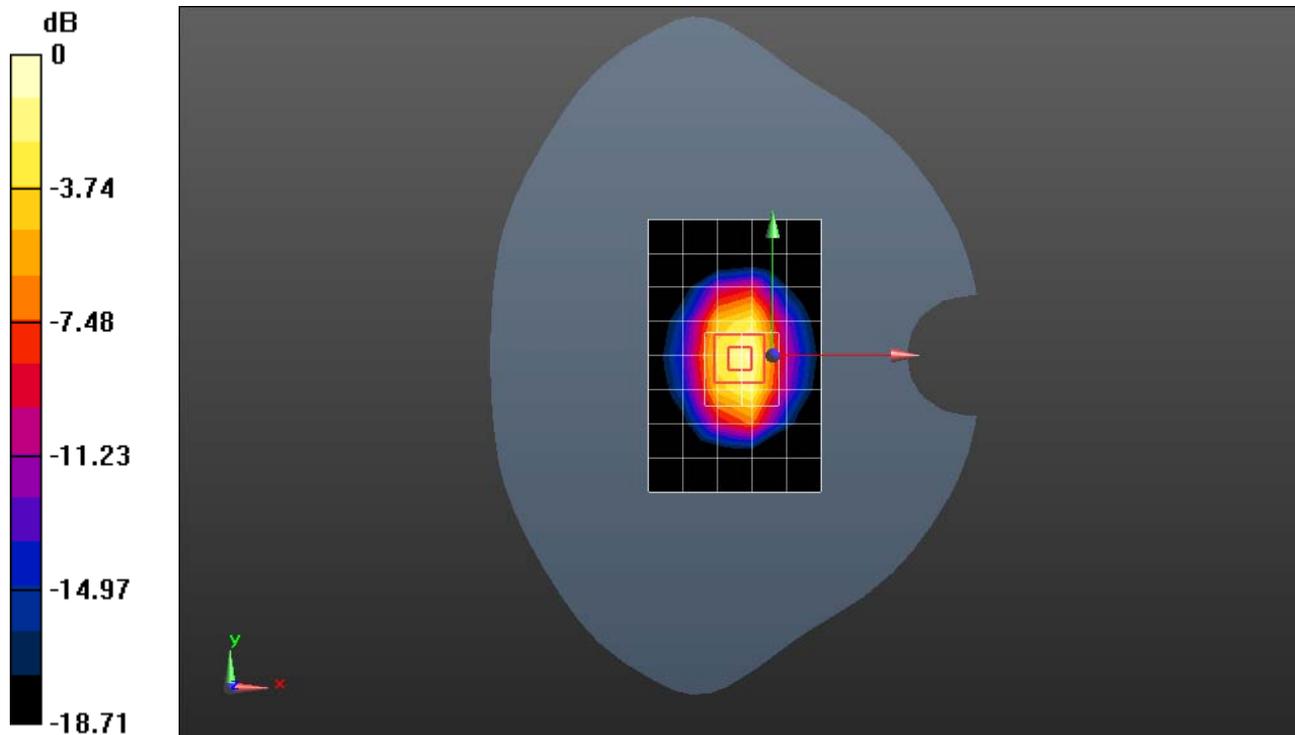

0 dB = 15.7 W/kg = 11.96 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-1900-EX-Body

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d091

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 52.362$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: EX3DV4 - SN3736; ConvF(7.15, 7.15, 7.15); Calibrated: 2016-4-26;
- ⌘ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌘ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌘ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ⌘ DASY52 52.8.8(1222);

Configuration/d=10mm, Pin=250mW/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 12.1 W/kg

Configuration/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 85.21 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 19.5 W/kg
SAR(1 g) = 10.8 W/kg; SAR(10 g) = 5.62 W/kg
Maximum value of SAR (measured) = 16.6 W/kg

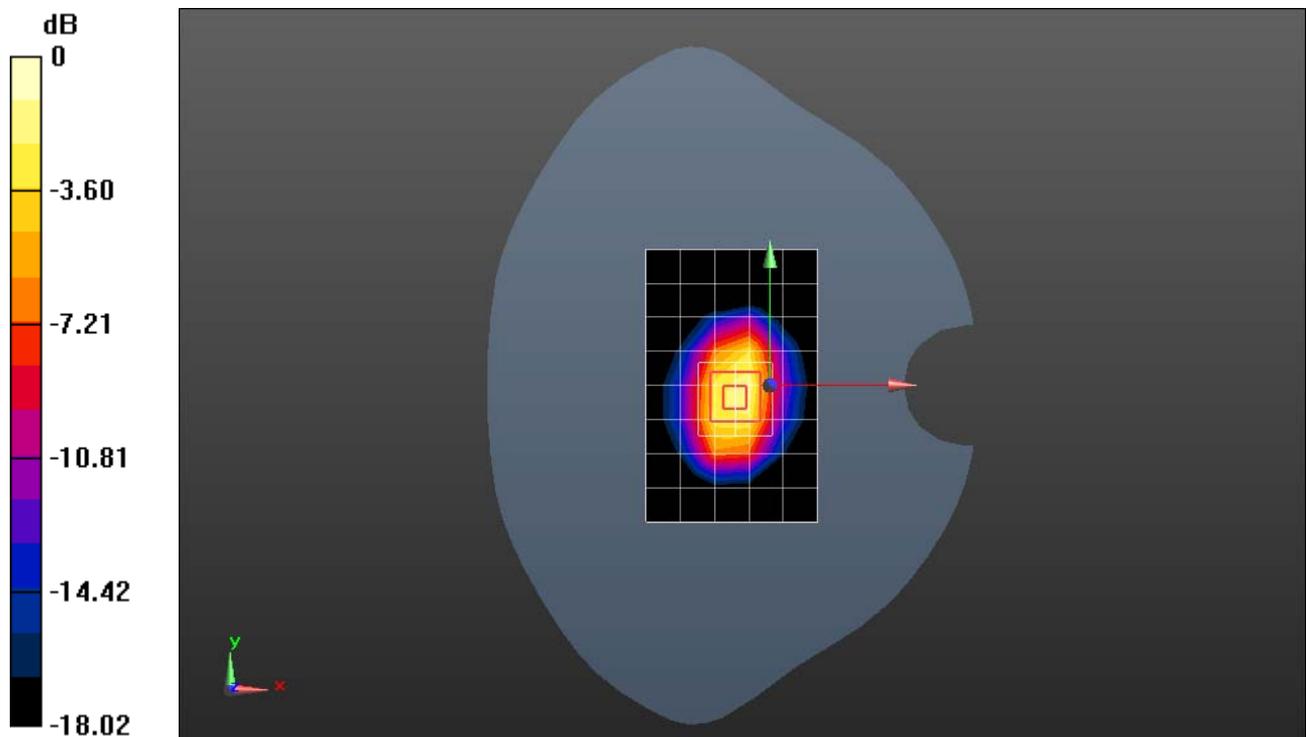

0 dB = 16.6 W/kg = 12.19 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-1900-EX-Body

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d091

Communication System: UID 0, CW (0); Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.544$ S/m; $\epsilon_r = 51.345$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ⌵ Probe: EX3DV4 - SN3736; ConvF(7.15, 7.15, 7.15); Calibrated: 2016-4-26;
- ⌵ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌵ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌵ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ⌵ DASY52 52.8.8(1222);

Configuration/d=10mm, Pin=250mW/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 12.0 W/kg

Configuration/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 85.21 V/m; Power Drift = -0.15 dB
 Peak SAR (extrapolated) = 19.3 W/kg
SAR(1 g) = 10.7 W/kg; SAR(10 g) = 5.58 W/kg
 Maximum value of SAR (measured) = 16.4 W/kg

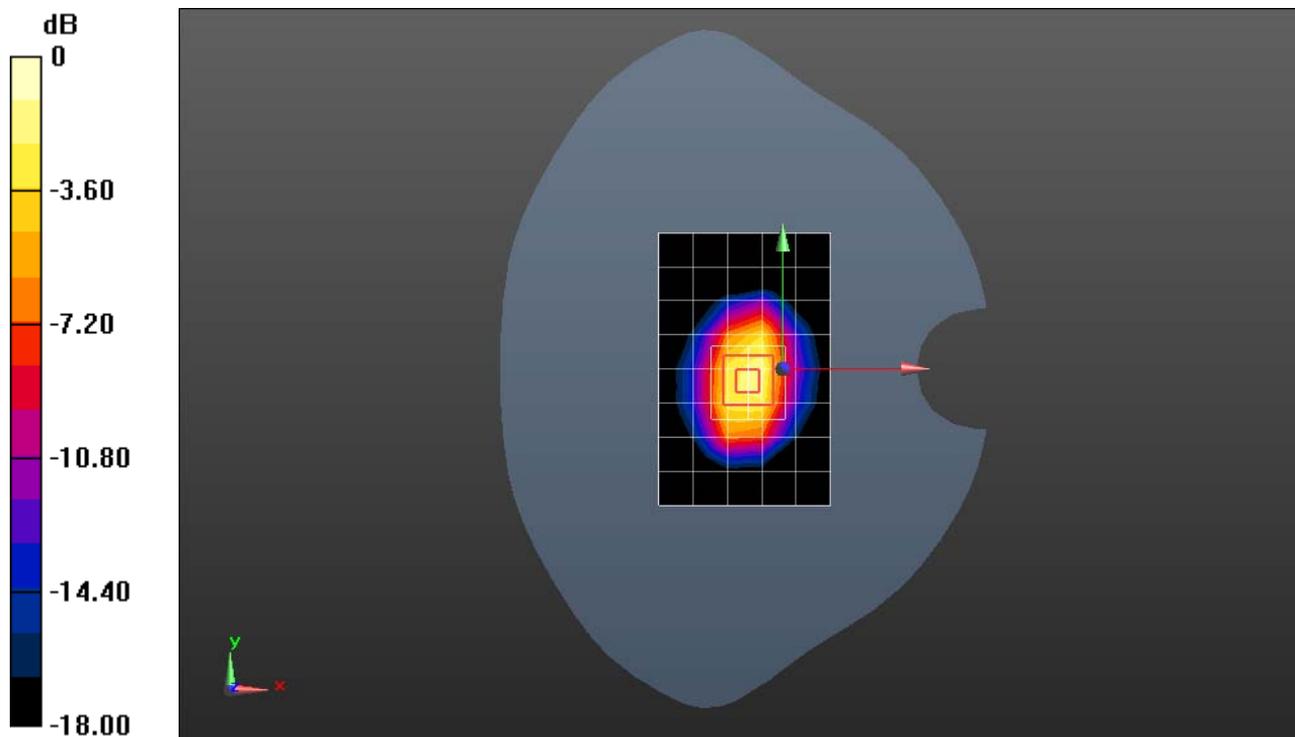

0 dB = 16.4 W/kg = 12.16 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

System Performance Check-D2450-ES-Head

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:860

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.838$ S/m; $\epsilon_r = 39.01$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: ES3DV3 - SN3168; ConvF(4.55, 4.55, 4.55); Calibrated: 2015-9-28;
- ⌘ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ⌘ Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ⌘ Phantom: SAM1; Type: SAM; Serial: TP-1475
- ⌘ DASY52 52.8.8(1222);

Configuration/d=10mm, Pin=250mW/Area Scan (6x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 17.1 W/kg

Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 88.20 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 26.7 W/kg
SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.38 W/kg
Maximum value of SAR (measured) = 17.6 W/kg

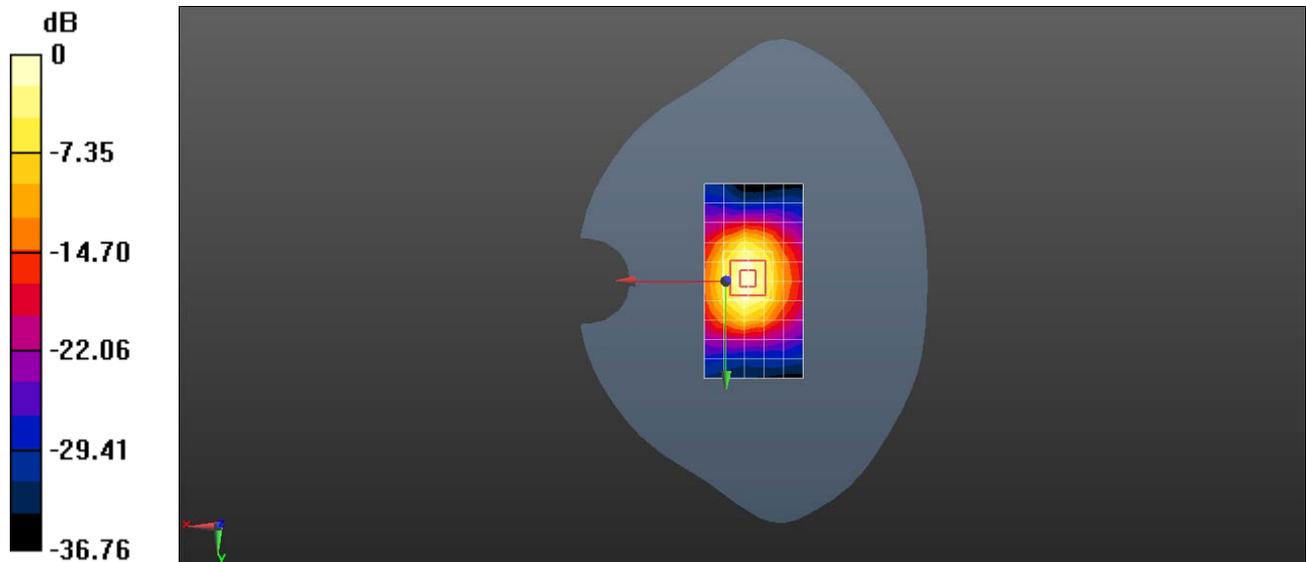

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D2450-ES-Body

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:860

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 53.436$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ⊂ Probe: ES3DV3 - SN3168; ConvF(4.35, 4.35, 4.35); Calibrated: 2015-9-28;
- ⊂ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ⊂ Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ⊂ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ⊂ DASY52 52.8.8(1222);

Configuration/d=10mm, Pin=250mW/Area Scan (6x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 14.6 W/kg

Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 92.75 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 26.7 W/kg
SAR(1 g) = 13 W/kg; SAR(10 g) = 6.01 W/kg
Maximum value of SAR (measured) = 17.1 W/kg

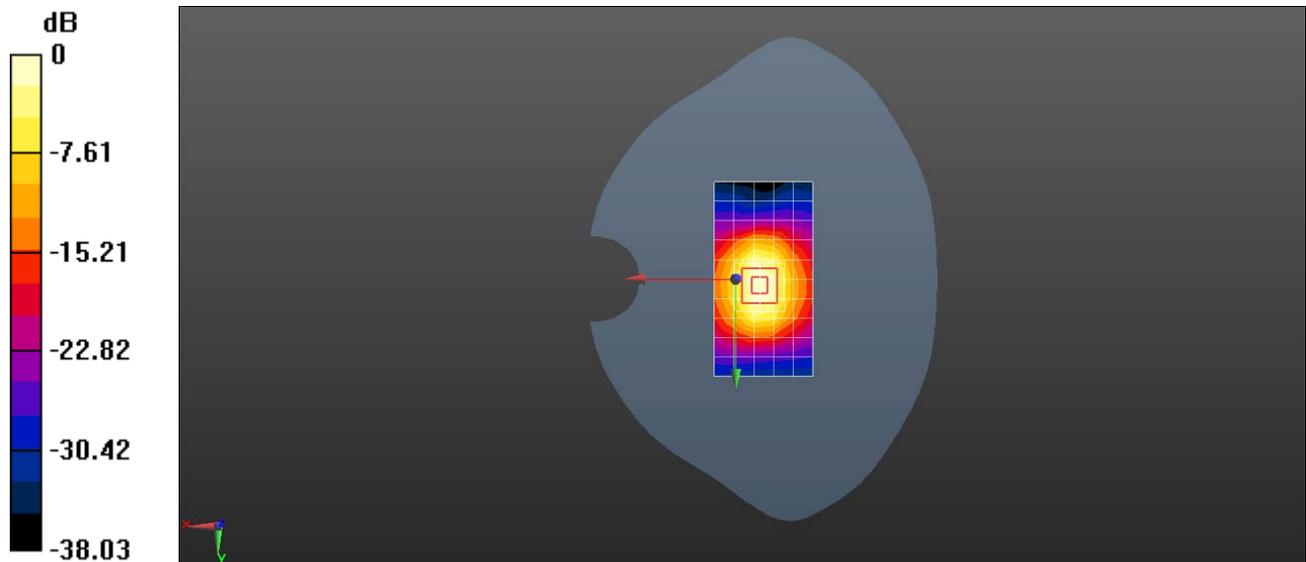

0 dB = 14.6 W/kg = 11.64 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D2600-ES-Head

DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1021


Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 37.669$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: ES3DV3 - SN3168; ConvF(4.48, 4.48, 4.48); Calibrated: 2015-9-28;
- ⌘ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ⌘ Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ⌘ Phantom: SAM1; Type: SAM; Serial: TP-1475
- ⌘ DASY52 52.8.8(1222);

Configuration/d=10mm, Pin=250mW/Area Scan (8x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 20.4 W/kg

Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 86.70 V/m; Power Drift = -0.19 dB
 Peak SAR (extrapolated) = 32.4 W/kg
SAR(1 g) = 15.4 W/kg; SAR(10 g) = 6.91 W/kg
 Maximum value of SAR (measured) = 20.7 W/kg

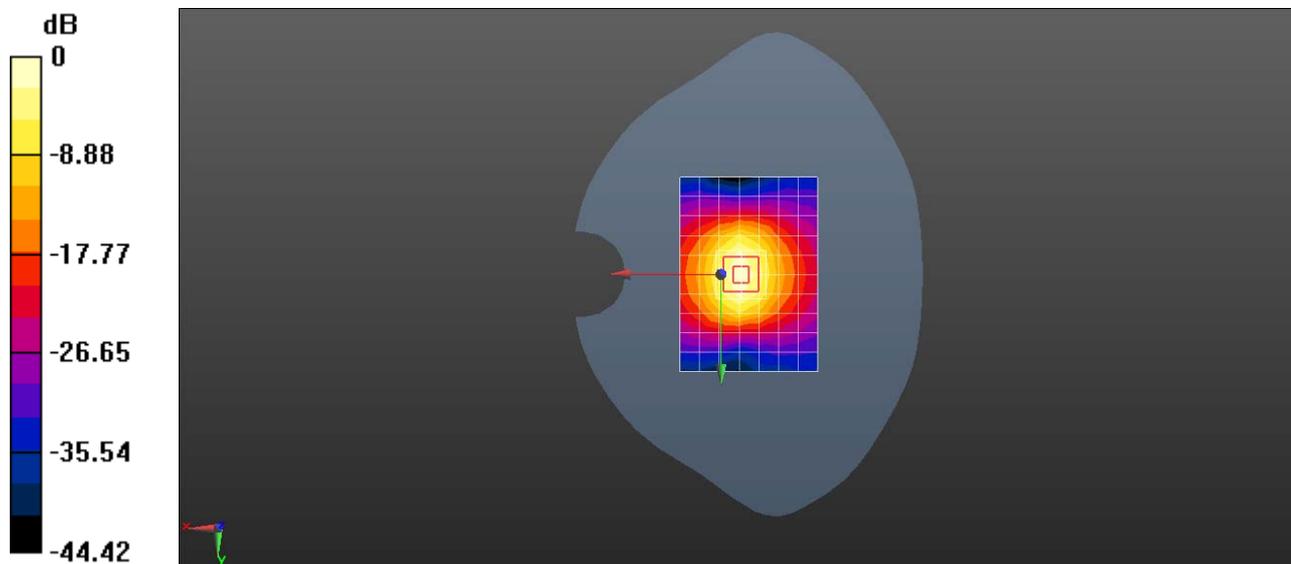

0 dB = 20.4 W/kg = 13.10 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D2600-ES-Body

DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1021

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.124$ S/m; $\epsilon_r = 51.521$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: ES3DV3 - SN3168; ConvF(4.23, 4.23, 4.23); Calibrated: 2015-9-28;
- ⌘ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ⌘ Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ⌘ Phantom: SAM2; Type: SAM; Serial: TP-1474
- ⌘ DASY52 52.8.8(1222);

Configuration/d=10mm, Pin=250mW/Area Scan (8x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 18.6 W/kg

Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 82.97 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 30.6 W/kg
SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.36 W/kg
Maximum value of SAR (measured) = 19.0 W/kg

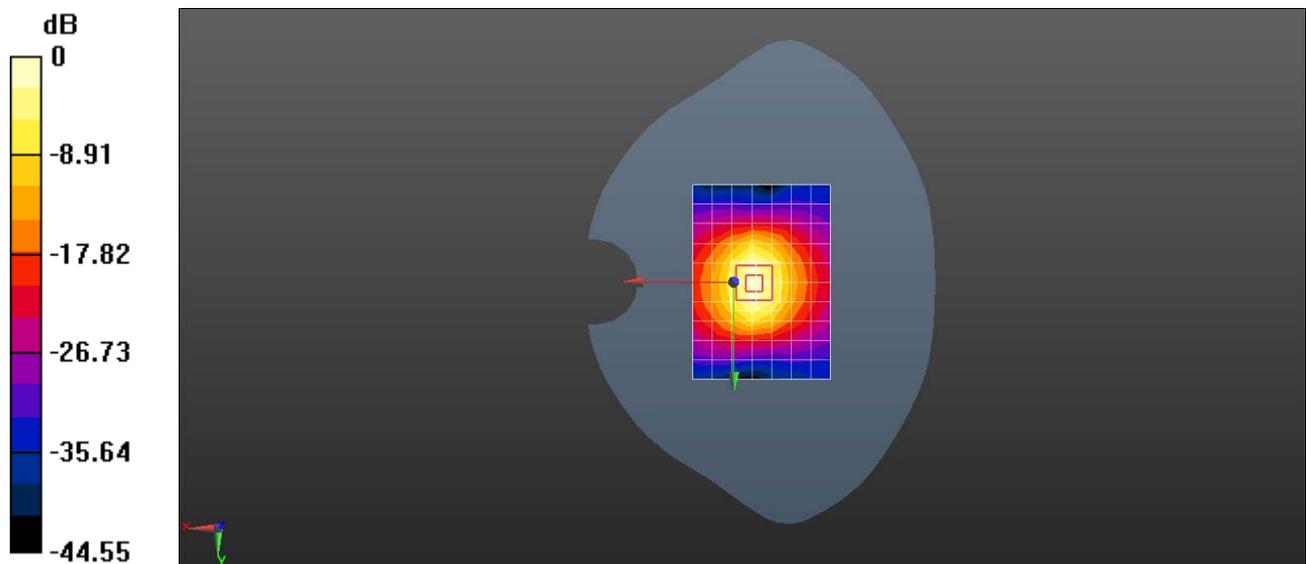

0 dB = 18.6 W/kg = 12.70 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

System Performance Check-D5250-EX-Head

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1155

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.744$ S/m; $\epsilon_r = 35.376$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(4.57, 4.57, 4.57); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222);

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5250 MHz/Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 16.4 W/kg

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5250 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm


(8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.52 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 35.1 W/kg

SAR(1 g) = 7.91 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 19.5 W/kg

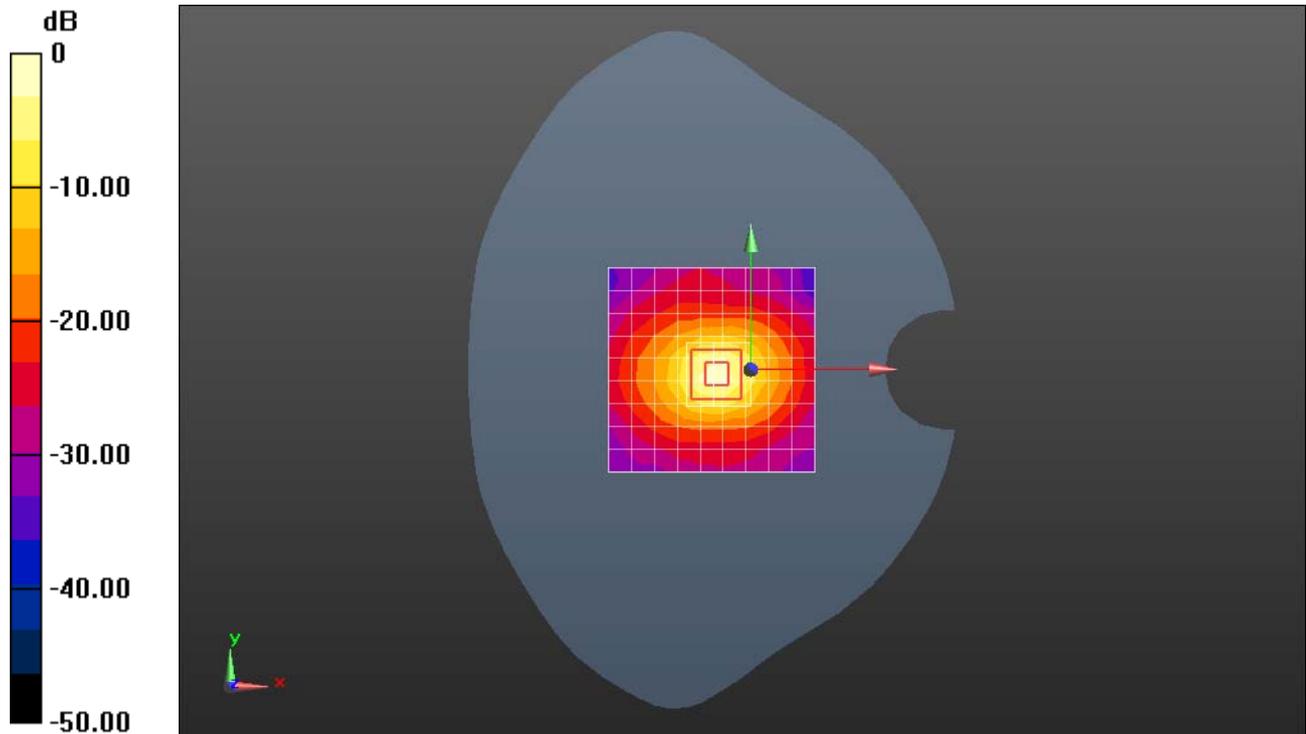

0 dB = 19.5 W/kg = 12.90 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D5250-EX-Body

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1155

Communication System: UID 0, CW (0); Frequency: 5250 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 5.497$ S/m; $\epsilon_r = 48.505$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(3.92, 3.92, 3.92); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222);

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5250 MHz/Area Scan (10x10x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 10.6 W/kg

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5250 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm


(8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.34 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 29.0 W/kg

SAR(1 g) = 7.21 W/kg; SAR(10 g) = 2 W/kg

Maximum value of SAR (measured) = 16.6 W/kg

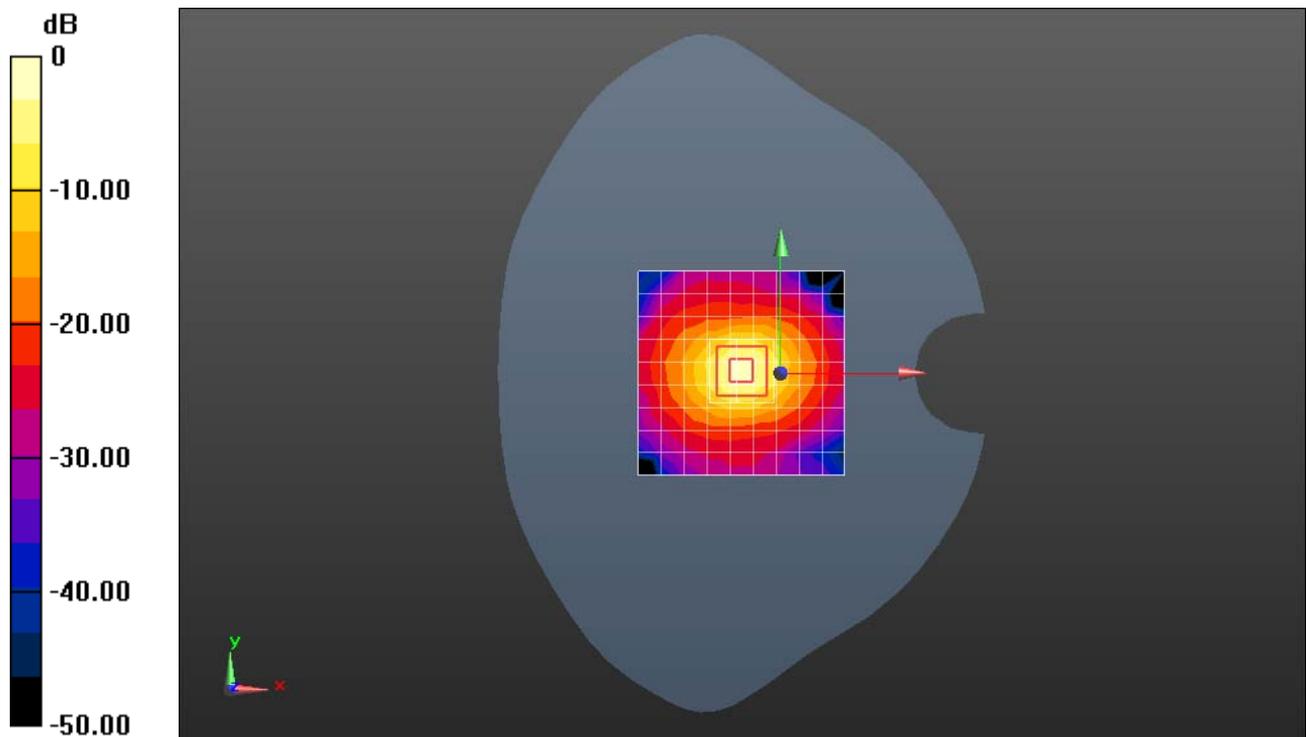

0 dB = 16.6 W/kg = 12.20 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

System Performance Check-D5600-EX-Head

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1155

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.224$ S/m; $\epsilon_r = 36.254$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: EX3DV4 - SN3736; ConvF(4.29, 4.29, 4.29); Calibrated: 2016-4-26;
- ⌘ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ⌘ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌘ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ⌘ DASY52 52.8.8(1222);

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 17.6 W/kg

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm


(8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.31 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 39.2 W/kg

SAR(1 g) = 8.47 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

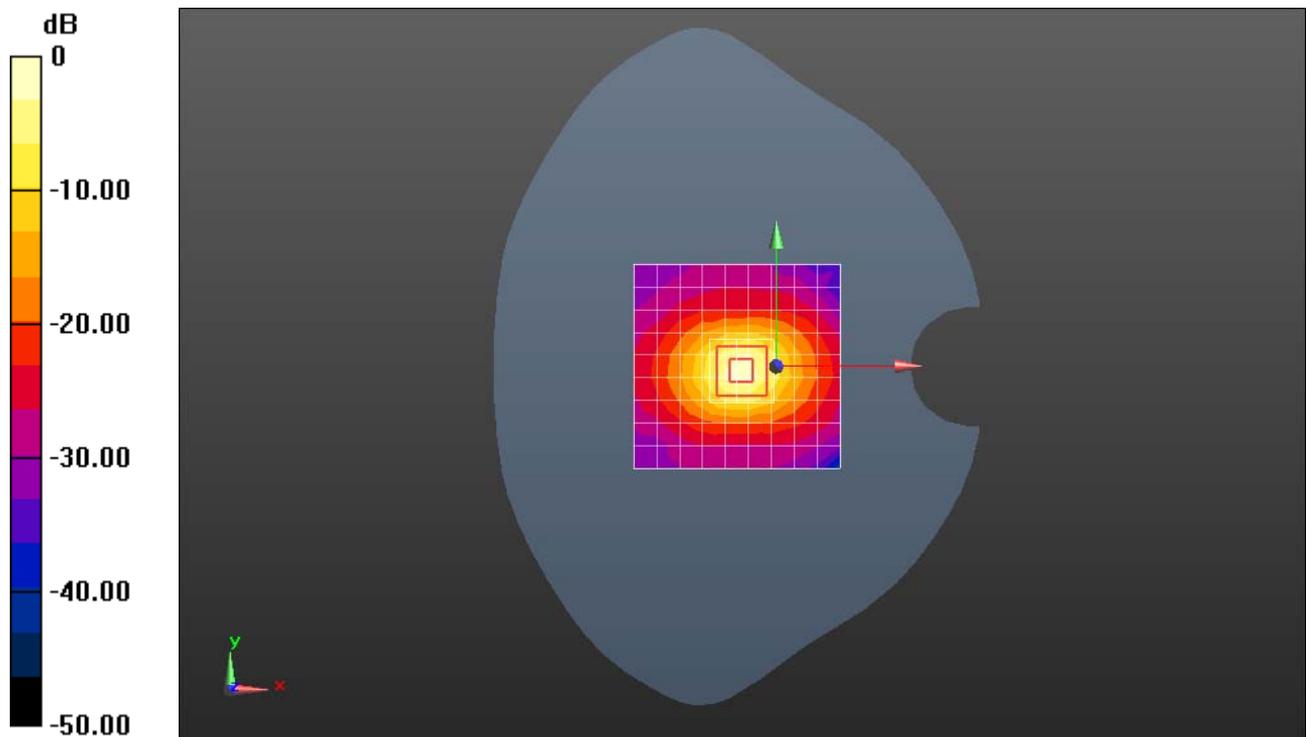

0 dB = 20.7 W/kg = 13.15 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D5600-EX-Body

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1155

Communication System: UID 0, CW (0); Frequency: 5600 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.903$ S/m; $\epsilon_r = 48.303$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: EX3DV4 - SN3736; ConvF(3.48, 3.48, 3.48); Calibrated: 2016-4-26;
- ⌘ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ⌘ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌘ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ⌘ DASY52 52.8.8(1222);

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 11.3 W/kg

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.35 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 31.3 W/kg

SAR(1 g) = 7.51 W/kg; SAR(10 g) = 2.06 W/kg

Maximum value of SAR (measured) = 17.8 W/kg

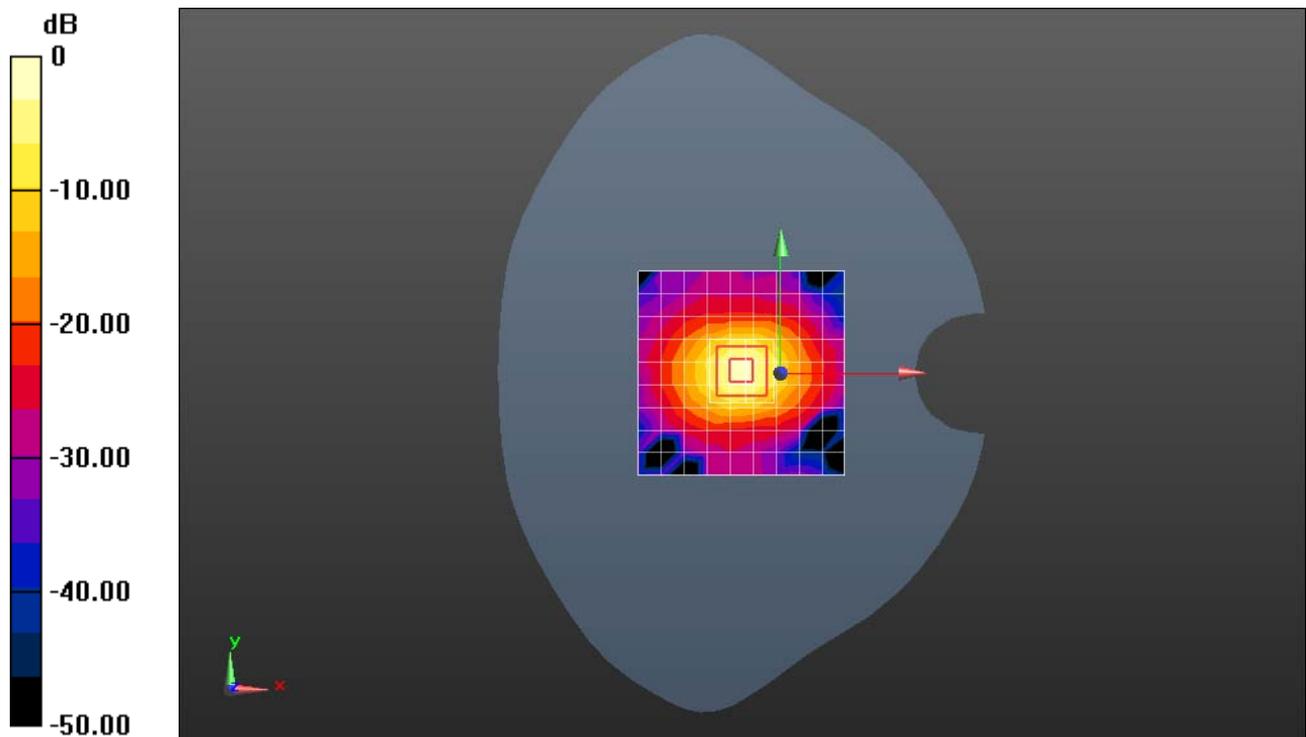

0 dB = 17.8 W/kg = 12.50 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

System Performance Check-D5750-EX-Head

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1155

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.264$ S/m; $\epsilon_r = 36.252$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(4.44, 4.44, 4.44); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222);

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5750 MHz/Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 17.1 W/kg

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5750 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm


(8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.46 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 37.2 W/kg

SAR(1 g) = 8 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 19.6 W/kg

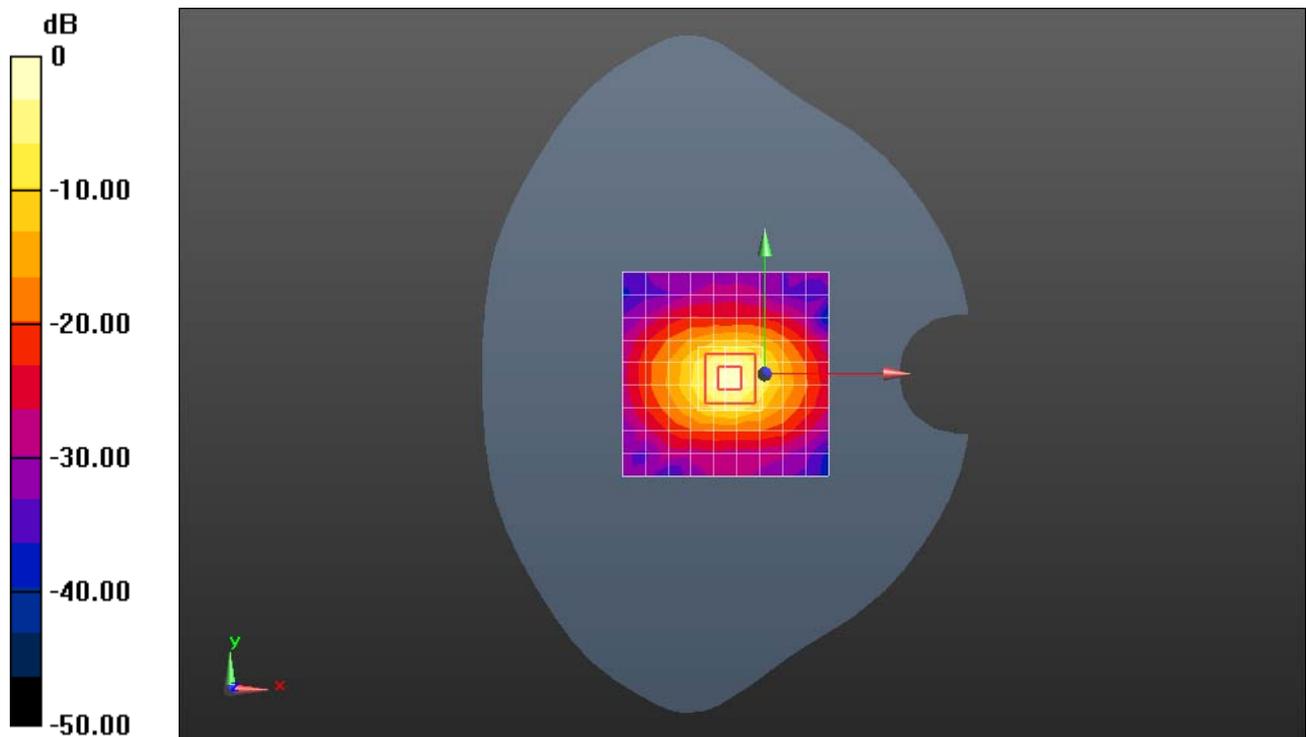

0 dB = 19.6 W/kg = 12.93 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

System Performance Check-D5750-EX-Body

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1155

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.985$ S/m; $\epsilon_r = 49.027$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: EX3DV4 - SN3736; ConvF(3.6, 3.6, 3.6); Calibrated: 2016-4-26;
- ⌘ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ⌘ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌘ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ⌘ DASY52 52.8.8(1222);

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5750 MHz/Area Scan (10x10x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 12.3 W/kg

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5750 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm


(8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.13 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 33.7 W/kg

SAR(1 g) = 7.8 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 18.7 W/kg

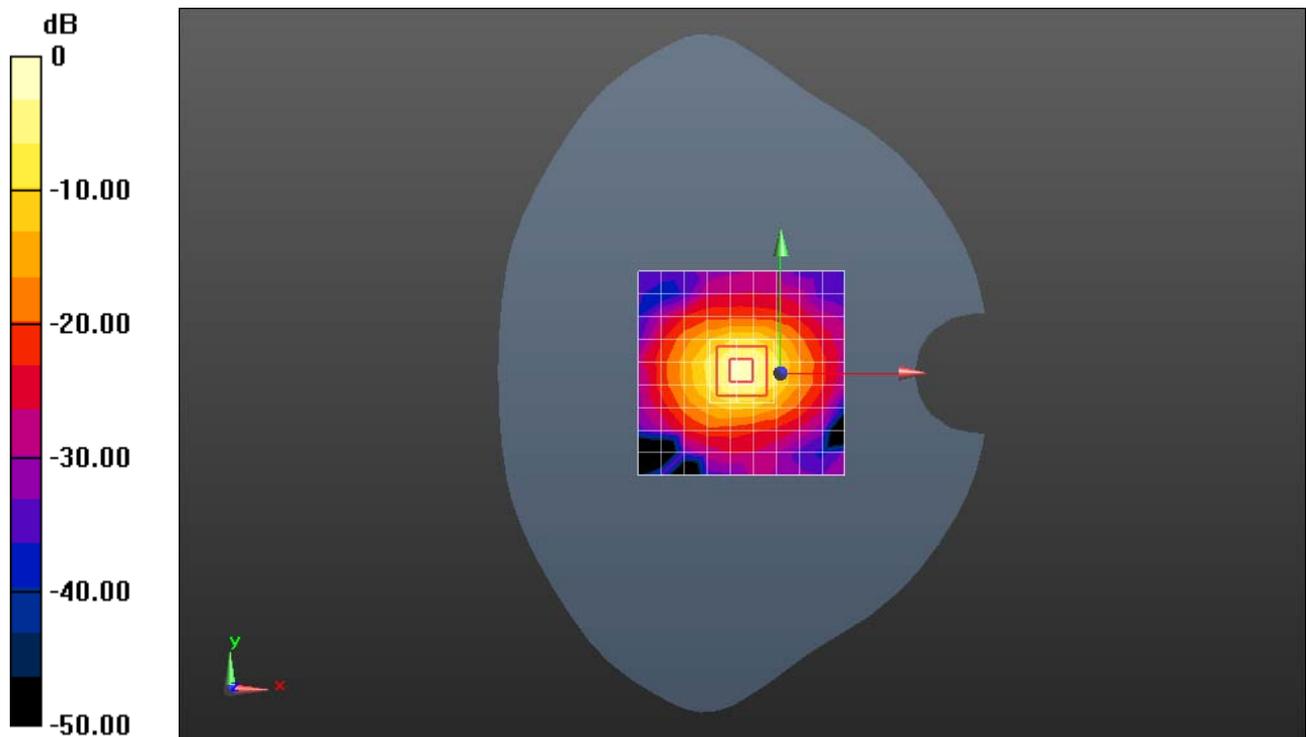

0 dB = 18.7 W/kg = 12.72 dBW/kg