



EMC Test Report

Product Name: LTE USB Stick

Model Number: MS2372h-607

FCC ID: QISMS2372H-607

Report No: SYBH(Z-EMC)048092017-2

Global Compliance and Testing Center of Huawei Technologies Co., Ltd

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01
3. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-1.
4. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named as “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”, the both names have coexisted since 2009.
5. The laboratory has been recognized by the US Federal Communications Commission (FCC) to perform compliance testing subject to the Commission's Declaration Of Conformity (DOC) and Certification rules. The Designation Number is CN1173, and the Test Firm Registration Number is 294140.”
6. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
7. The test report is invalid if there is any evidence of erasure and/or falsification.
8. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
9. Normally, the test report is only responsible for the samples that have undergone the test.
10. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Applicant: Huawei Technologies Co., Ltd.

Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt Test Item: Sep.25,2017

Start Date of Test: Sep.25,2017

End Date of Test: Sep.30,2017

Test Result: Pass

Approved By (Lab Manager)	<u>2017-09-30</u>	<u>Roger Zhang</u>	<i>Roger Zhang</i>
	Date	Name	Signature
Prepared by (Test Engineer)	<u>2017-09-30</u>	<u>Luo Wei</u>	<i>Luo wei</i>
	Date	Name	Signature



TABLE OF CONTENT

1	General Information.....	5
1.1	EUT Description	5
1.2	Test Site Information	6
1.3	Applied Standards	6
2	Summary of Results	7
3	System Configuration during EMC Test.....	8
3.1	Test Mode.....	8
3.2	Test System Configuration.....	8
3.3	Cables Used during Test.....	9
3.4	Associated Equipment Used during Test.....	9
4	Electromagnetic Interference (EMI)	10
4.1	Radiated Disturbance 30MHz to 18GHz.....	10
4.2	Conducted Disturbance 0.15 MHz to 30MHz.....	12
5	Main Test Instruments	13
6	System Measurement Uncertainty	14
7	Test Data and Graph	15
7.1	Radiated Disturbance	15
7.2	Conducted Disturbance.....	17



1 General Information

1.1 EUT Description

EUT Description	
Product Name	LTE USB Stick
Model Number	MS2372h-607
Serials Number	2NU0117907000016
Input Rated Voltage	5V
TX Frequency	GSM 850: 824MHz to 849MHz GSM 1900: 1850MHz to 1910MHz LTE BAND 7: 2500MHz to 2570MHz
RX Frequency	GSM 850: 869MHz to 894MHz GSM 1900: 1930MHz to 1990MHz LTE BAND 7: 2620MHz to 2690MHz
HW Version	CL1MS2372HM01 VER.B
SW Version	21.328.01.07.00

Remark: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed information.



1.2 Test Site Information

Test Site:	RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD.
Test Site Location:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.3 Applied Standards

APPLIED STANDARD

47 CFR FCC Part 15:2016, Subpart B

2 Summary of Results

Summary of Results				
Test Items	Test Mode	Performance Class & Required Performance Criteria	Result	Site
<u>Radiated Emissions</u> <input checked="" type="checkbox"/> Enclosure Port	Mode 1	CLASS B	Pass	Site1
<u>Conducted Emissions</u> <input checked="" type="checkbox"/> DC Power Port <input checked="" type="checkbox"/> AC Power Port <input type="checkbox"/> Telecommunication Ports	Mode 1~Mode 2	CLASS B	Pass	Site1
Note: 1, Measurement taken is within the measurement uncertainty of measurement system. 2, <input checked="" type="checkbox"/> The item has been tested; <input type="checkbox"/> The item has not been tested.				

During the measurement, the environmental conditions complied with the range listed as below.

Item	Required
Ambient temperature	15°C ~ 35°C
Relative humidity	25% ~ 75%
Atmospheric pressure	86kPa ~ 106kPa

3 System Configuration during EMC Test

3.1 Test Mode

Huawei has verified the construction and function in typical operation. All the test modes are carried out with the EUT under normal operation, which are shown in this test report and defined as below:

Test Mode	
Mode 1:	EUT with PC+ USB Cable+ Idle Mode
Mode 2:	EUT with PC+ USB Cable + Traffic Mode


Traffic Mode:

When the EUT state is switched on and with Radio Resource Control (RRC) connection established.

Idle Mode:

When the EUT state is switched on but without Radio Resource Control (RRC) connection.

3.2 Test System Configuration

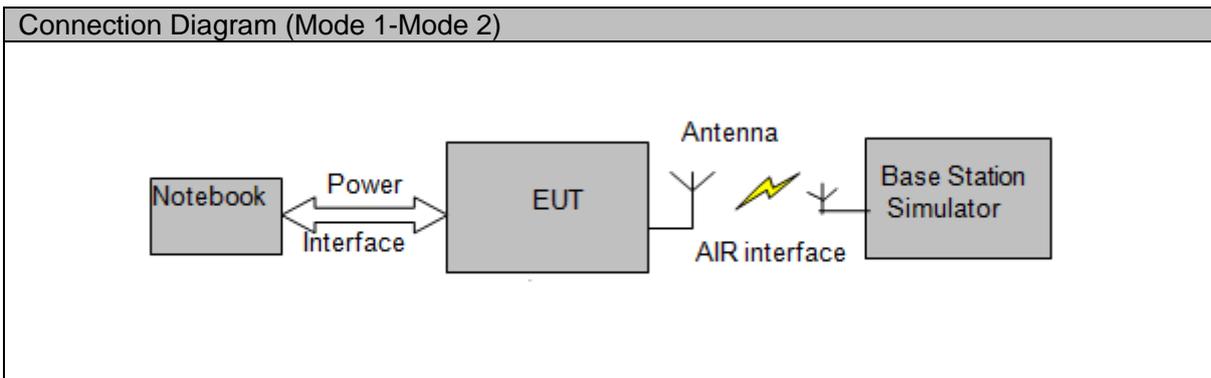



3.3 Cables Used during Test

Cable	Quantity	Length	Type of Cable
USB cable	1	1m	shielded

3.4 Associated Equipment Used during Test

Name	Model	Manufacturer	S/N	Calibrated Deadline
Radio Communication Tester	CMU200	R&S	3607033573	2018-02-28
Radio Communication Tester	MT8820C	Anritsu	A110518805	2018-05-15
Notebook	X230	ThinkPad	31090403579	/

4 Electromagnetic Interference (EMI)

4.1 Radiated Disturbance 30MHz to 18GHz

4.1.1 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4-2014. The test distance is 3m. The set-up and test methods are according to ANSI C63.4-2014.

A preliminary scan and a final scan of the emissions are made from 30 MHz to 18 GHz by using test script of software; The emissions are measured using Quasi-Peak Detector (30MHz~1GHz) and AV/PK detector (above 1GHz). The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna is 1m to 4m. The azimuth range of turntable is 0° to 360°. The receiving antenna has two polarizations V and H.

Measurement bandwidth (RBW) for 30MHz to 1000 MHz: 120 kHz;

Measurement bandwidth (RBW) for 1000MHz to 18000 MHz: 1MHz;

EUT is configured in idle mode and the test performed at worst emission state.

4.1.2 Test setup

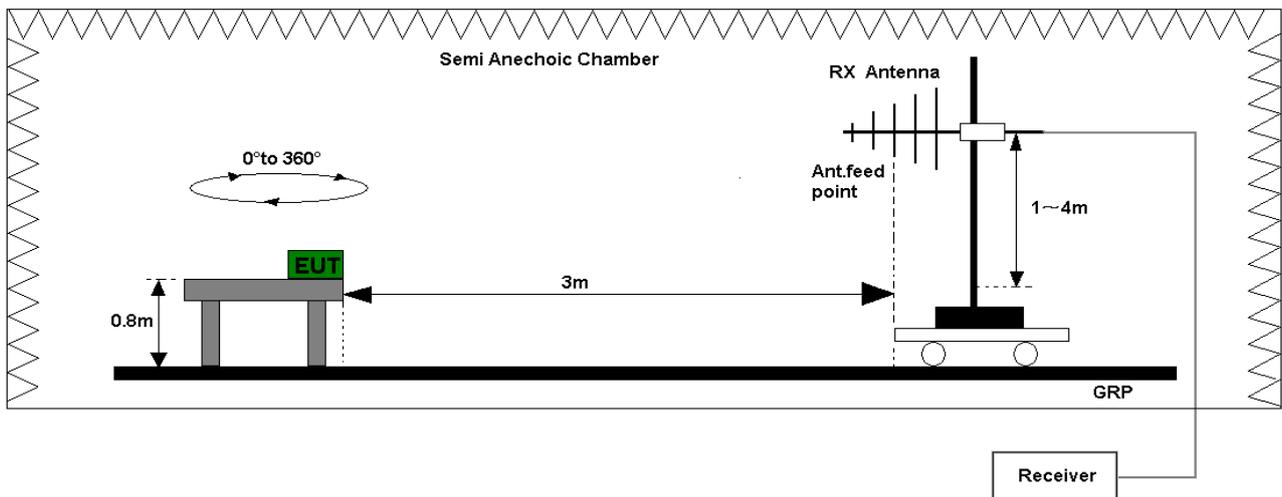


Figure 1. Test set-up of radiated disturbance(30MHz-1GHz)

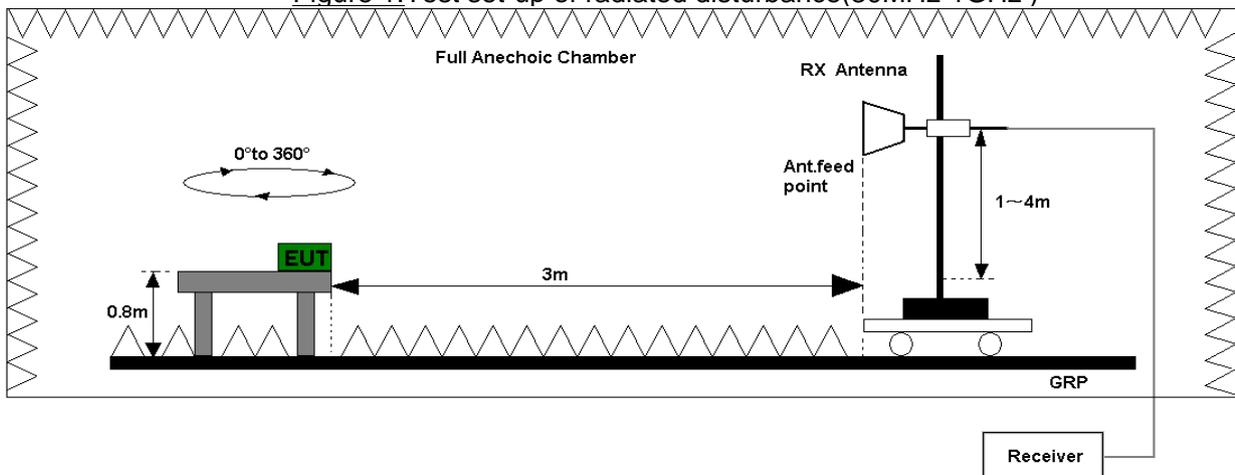


Figure 2. Test set-up of radiated disturbance(above 1GHz)

4.1.3 Test Results

The EUT has met the requirements for Radiated Emission of enclosure port.
 Refer to the section 7.1 of this report for test data.

Test Limits (Class B)				
Frequency of Emission (MHz)	Radiated Limit			
	Unit(μ V/m)		Unit(dB μ V/m)	
30-88	100		40	
88-216	150		43.5	
216-960	200		46	
Above 960	500		54	
Above 1000	AV	PK	AV	PK
	500	5000	54	74

4.2 Conducted Disturbance 0.15 MHz to 30MHz

4.2.1 Test Procedure

The Table-top EUT is placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT is connected to LISN and LISN is connected to reference Ground Plane. EUT is 80cm away from LISN. The set-up and test methods are according to ANSI C63.4-2014.

Conducted Disturbance at AC Port measurements are undertaken on the L and N Lines. The emissions are measured using a Quasi-Peak Detector and Average Detector.

EUT is communicated with the simulator through Air interface, the simulator controls the EUT to transmitter the maximum power which defined in specification of product. The EUT operated on the typical channel.

Measurement bandwidth (RBW) for 150 kHz to 30 MHz: 9 kHz;

The EUT is set in the shielded chamber and operated under nominal conditions.

4.2.2 Test Setup

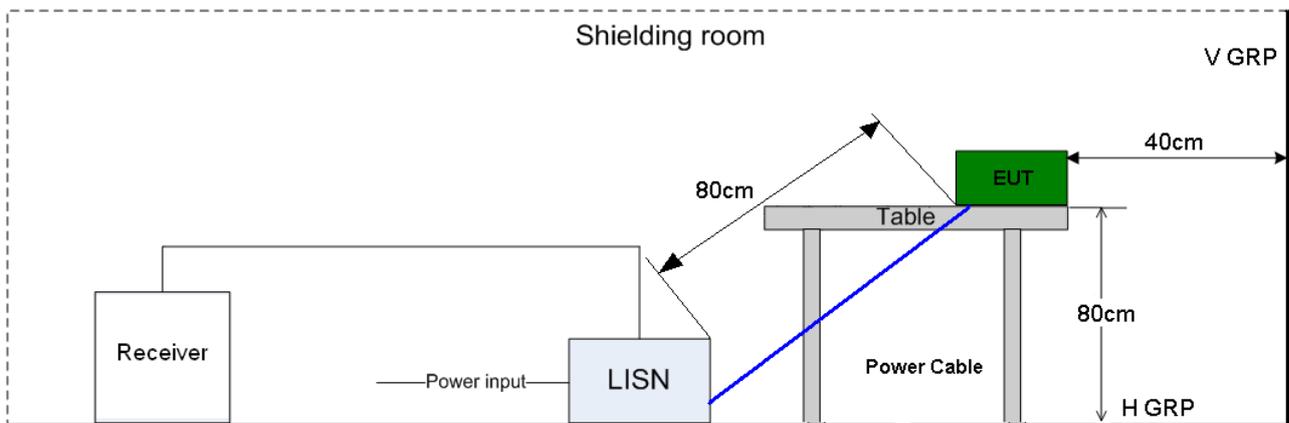


Figure 3. Test Set-up of conducted disturbance

4.2.3 Test Results

The EUT has met requirements for Conducted disturbance.

Refer to the section 7.2 of this report for test data.

Test Limit of AC Power Port		
Frequency range	150kHz ~ 30MHz	
Frequency	Voltage limits	
	QP	AV
0.15MHz~0.5MHz	66-56 dB μ V	56-46 dB μ V
0.5MHz-5MHz	56 dB μ V	46 dB μ V
5MHz~30MHz	60 dB μ V	50 dB μ V

5 Main Test Instruments

Main Test Equipments						
Test item	Test Instrument	Model	S/N	Manufacturer	Calibrated deadline	Cal interval (month)
RE	EMI Test receiver	ESU26	100150	R&S	Feb. 20, 2018	12
	Broadband Antenna	VULB 9163	9163-491	SCHWARZBECK	Mar. 28, 2019	24
	Horn Antenna	HF906	100683	R&S	Mar. 28, 2019	24
CE	EMI Test receiver	ESU26	101163	R&S	Feb. 20, 2018	12
	Artificial Mains Network	ENV216	100382	R&S	May. 15, 2018	12
Software Information						
Test Item	Software Name		Manufacturer		Version	
RE	EMC32		R&S		V9.25.0	
CE	EMC32		R&S		V9.25.0	



6 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 are:

System Measurement Uncertainty		
Items		Extended Uncertainty
RE(30MHz-1GHz)	Field strength (dB μ V/m)	U=4.1dB; k=2
RE(1GHz-18GHz)	Field strength (dB μ V/m)	U=5.0dB; k=2
CE	Disturbance Voltage (dB μ V)	U=2.5dB; k=2


7 Test Data and Graph

Only the worst test result is shown in this report.

7.1 Radiated Disturbance

7.1.1 30MHz~1GHz

Mode 1:

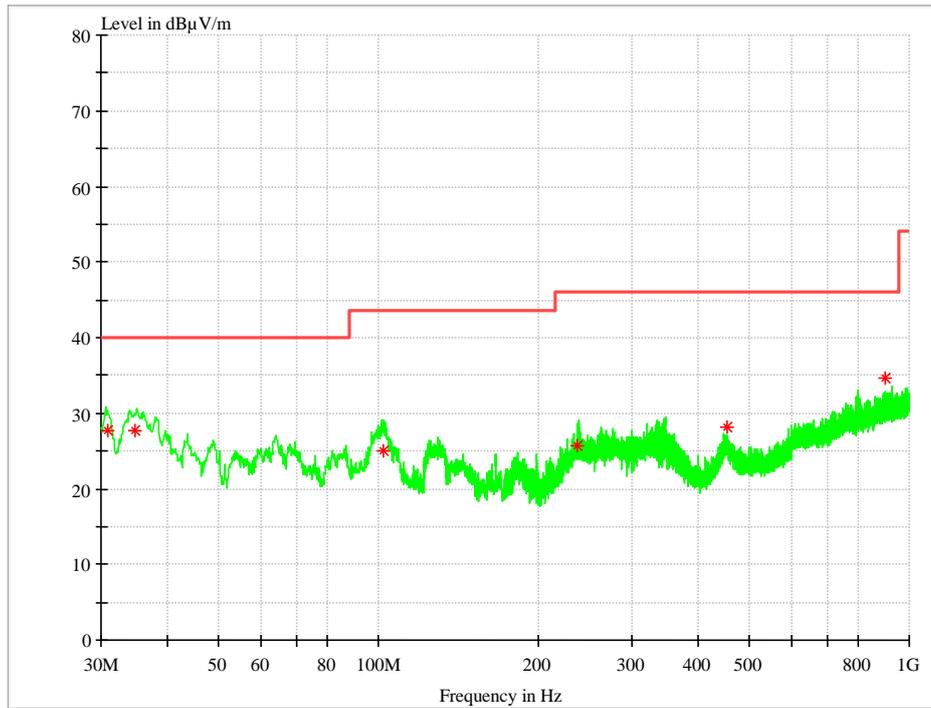

MEASUREMENT RESULT: QP Detector


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
30.896950	27.62	14.7	40.00	12.38	100.0	197.0	VERTICAL
34.663200	27.76	15.2	40.00	12.24	100.0	18.0	VERTICAL
101.936650	25.09	13.8	43.50	18.41	143.0	350.0	VERTICAL
237.584400	25.63	14.3	46.00	20.37	129.0	264.0	HORIZONTAL
453.604800	28.20	19.0	46.00	17.80	107.0	208.0	VERTICAL
899.754650	34.73	26.1	46.00	11.27	200.0	197.0	HORIZONTAL

Note:

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
 The reading level is calculated by software which is not shown in the sheet.

7.1.2 1GHz~18GHz

Mode 1:

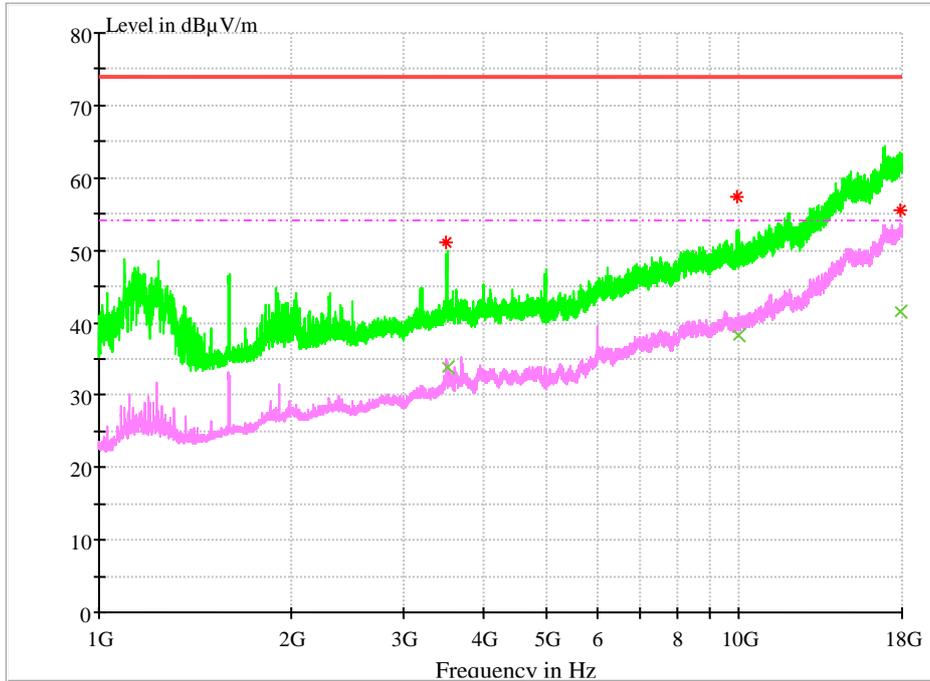

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
3492.238667	51.13	-3.5	74	22.87	100	316	VERTICAL
9964.602667	57.3	7.4	74	16.7	140	12	VERTICAL
17922.54667	55.43	21.6	74	18.57	256	63	HORIZONTAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
3499.236	33.9	-3.5	54	20.1	100	316	VERTICAL
9977.314	38.21	7.4	54	15.79	143	7	VERTICAL
17870.98867	41.63	21.5	54	12.37	160	354	HORIZONTAL


Note:

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.

7.2 Conducted Disturbance

7.2.1 AC Port Test Data

Mode 2:

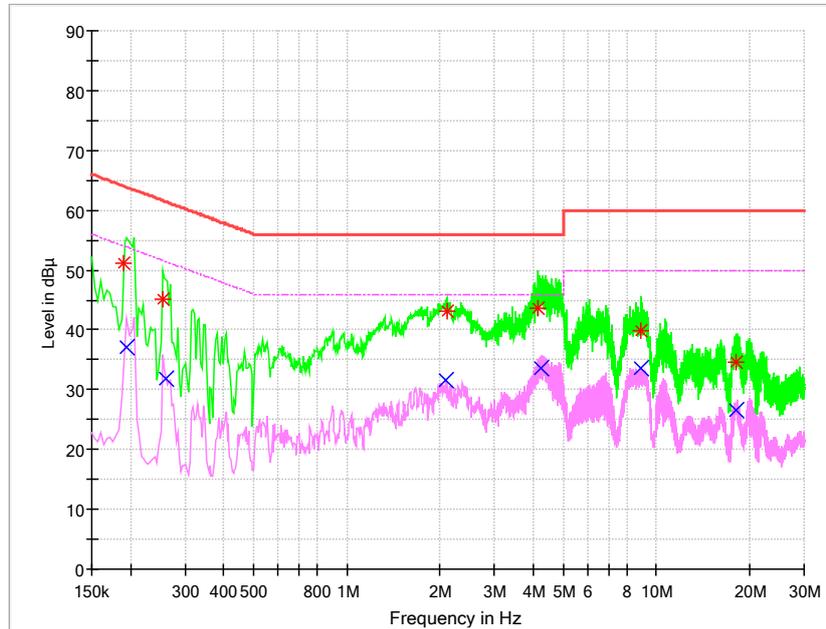

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV	Line	Transd dB	Margin dB	Limit dBµV	PE
0.190489	51.14	N	9.7	12.87	64.02	FLO
0.253845	45.17	L1	9.7	16.46	61.63	FLO
2.098522	43.1	N	9.7	12.9	56	FLO
4.129714	43.52	N	9.8	12.48	56	FLO
8.889401	39.92	L1	9.9	20.08	60	FLO
18.121226	34.5	L1	10.1	25.5	60	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV	Line	Transd dB	Margin dB	Limit dBµV	PE
0.194539	37.06	L1	9.7	16.78	53.84	FLO
0.259515	31.77	L1	9.7	19.68	51.45	FLO
2.095601	31.6	N	9.7	14.4	46	FLO
4.259456	33.68	N	9.8	12.32	46	FLO
8.890166	33.58	L1	9.9	16.42	50	FLO
18.171019	26.54	L1	10.1	23.46	50	FLO

Note:

Level= Reading level+ Transd (cable loss + correction factor)

The reading level is calculated by software which is not shown in the sheet.

-----END-----