



FCC SAR Compliance Test Report

Product Name: Smart Phone

Model: HUAWEI MT7-L09,MT7-L09

Report No.: SYBH(Z-SAR)023072014-2

FCC ID: QISMT7-L09

	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	<i>Wei Huanbin</i>	<i>Gong Zhong</i>
DATE	2014-08-30	2014-08-30

The test results of this test report relate exclusively to the item(s) tested . The HUAWEI does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of HUAWEI.

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

Table of Contents

1	General Information.....	5
1.1	Statement of Compliance	5
1.2	RF exposure limits.....	6
1.3	EUT Description	7
1.3.1	General Description	9
1.3.2	Hotspot power reduction specification	9
1.3.3	Dynamic antenna tuning specification	10
1.3.4	Downlink LTE carrier aggregation specification	10
1.4	Test specification(s).....	11
1.5	Testing laboratory.....	11
1.6	Applicant and Manufacturer	11
1.7	Application details.....	11
1.8	Ambient Condition	11
2	SAR Measurement System	12
2.1	SAR Measurement Set-up	12
2.2	Test environment.....	13
2.3	Data Acquisition Electronics description	13
2.4	Probe description.....	14
2.5	Phantom description.....	15
2.6	Device holder description	16
2.7	Test Equipment List.....	17
3	SAR Measurement Procedure	18
3.1	Scanning procedure	18
3.2	Spatial Peak SAR Evaluation	19
3.3	Data Storage and Evaluation	20
4	System Verification Procedure	22
4.1	Tissue Verification	22
4.2	System Check	26
4.3	System check Procedure.....	27
5	SAR measurement variability and uncertainty	28
5.1	SAR measurement variability	28
5.2	SAR measurement uncertainty	28
6	SAR Test Configuration.....	29
6.1	GSM Test Configuration	29
6.2	UMTS Test Configuration	29
6.3	LTE Test Configuration.....	36
6.4	WiFi 2.4G Test Configuration	39
6.5	WiFi 5G Test Configuration	39
7	SAR Measurement Results	40
7.1	Conducted power measurements	40
7.1.1	Conducted power measurements of GSM850	41
7.1.2	Conducted power measurements of GSM1900	42
7.1.3	Conducted power measurements of UMTS Band V.....	44
7.1.4	Conducted power measurements of UMTS Band IV.....	45
7.1.5	Conducted power measurements of UMTS Band II	47
7.1.6	Conducted power measurements of LTE Band II.....	50
7.1.7	Conducted power measurements of LTE Band IV	62
7.1.8	Conducted power measurements of LTE Band V	74
7.1.9	Conducted power measurements of LTE Band VII	78
7.1.10	Conducted power measurements of Downlink LTE CA	86
7.1.11	Conducted power measurements of WiFi 2.4G.....	89
7.1.12	Conducted power measurements of WiFi 5G.....	90
7.1.13	Conducted power measurements of BT	92
7.2	SAR measurement Results	93
7.2.1	SAR measurement Result of GSM850	95
7.2.2	SAR measurement Result of GSM1900	97
7.2.3	SAR measurement Result of UMTS Band V	99
7.2.4	SAR measurement Result of UMTS Band IV	101
7.2.5	SAR measurement Result of UMTS Band II	103
7.2.6	SAR measurement Result of LTE Band II	105



7.2.7	SAR measurement Result of LTE Band IV	109
7.2.8	SAR measurement Result of LTE Band V	113
7.2.9	SAR measurement Result of LTE Band VII	116
7.2.10	SAR measurement Result of WiFi 2.4G	120
7.2.11	SAR measurement Result of WiFi 5G	121
7.3	Multiple Transmitter Evaluation	124
7.3.1	Stand-alone SAR test exclusion	126
7.3.2	Simultaneous Transmission Possibilities	127
7.3.3	SAR Summation Scenario	128
7.3.4	Simultaneous Transmission Conclusion	135
	Appendix A. System Check Plots	136
	Appendix B. SAR Measurement Plots	136
	Appendix C. Calibration Certificate	136
	Appendix D. Photo documentation	136



※ ※ **Modified History** ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2014-08-30	Gong Zhong

1 General Information

1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for HUAWEI MT7-L09, MT7-L09 are as below Table 1.

Band	Max Reported SAR(W/kg)			
	1-g Head	1-g Body-worn (15mm) *	1-g Hotspot (10mm)	10-g Extremity (0mm)**
GSM850	0.636	0.169	0.272	/
GSM1900	0.656	0.321	0.724	/
UMTS Band V	0.649	0.201	0.232	/
UMTS Band IV	0.364	1.004	1.094	/
UMTS Band II	0.655	0.668	0.974	/
LTE Band II	0.908	0.524	1.189	/
LTE Band IV	0.584	1.265	1.261	1.566
LTE Band V	0.657	0.267	0.289	/
LTE Band VII	0.778	0.388	1.118	/
WiFi 2.4G	0.885	0.067	0.125	/
WiFi 5G	0.671	0.061	/	0.336
The highest simultaneous SAR value is 1.579W/kg per KDB690783 D01				

Table 1: Summary of test result

Note:

1)* For body-worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

2)** For 10-g Extremity operation, this device has been tested and meets the 10-g SAR limits of 4.0 W/kg for general population/ uncontrolled exposure according to ANSI/IEEE C95.1:1992 and Industry Canada Radio Standards Specification RSS-102.

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2003 & IEEE Std 1528a-2005.

1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

1.3 EUT Description

Device Information:			
Product Name:	Smart Phone		
Model:	HUAWEI MT7-L09,MT7-L09		
FCC ID :	QISMT7-L09		
IMEI:	(Battery 1#):865276020003349 (Battery 2#):865276020005500		
Device Type :	Portable device		
Device Phase:	Identical Prototype		
Exposure Category:	Uncontrolled environment / general population		
Hardware Version :	HL1UJAZZM		
Software Version :	Z100-L09V100R001C00B105		
Antenna Type :	Internal antenna		
Others Accessories	Headset		
Device Operating Configurations:			
Supporting Mode(s)	GSM850/1900, UMTS Band II/IV/V, LTE Band II/IV/V/VII, WiFi 2.4G/ WiFi 5G(tested),BT, NFC		
Test Modulation	GSM(GMSK/8PSK),UMTS(QPSK),LTE(QPSK/16QAM),WiFi(OFDM)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band V	824-849	869-894
	UMTS Band IV	1710-1755	2110-2155
	UMTS Band II	1850-1910	1930-1990
	LTE Band II	1850-1910	1930-1990
	LTE Band IV	1710-1755	2110-2155
	LTE Band V	824-849	869-894
	LTE Band VII	2500-2570	2620-2690
	BT	2400-2483.5	
	WiFi 2.4G	2400-2483.5	
	WiFi 5G	5150-5250	
		5250-5350	
5470-5725			
5725-5825			
NFC	13.56		
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
Power Class:	4, tested with power level 5(GSM850)		
	1, tested with power level 0(GSM1900)		
	3, tested with power control "all 1"(UMTS Band II)		
	3, tested with power control "all 1"(UMTS Band IV)		
	3, tested with power control "all 1"(UMTS Band V)		
	3, tested with power control all Max.(LTE Band II)		

Power Class:	3, tested with power control all Max.(LTE Band IV)
	3, tested with power control all Max.(LTE Band V)
	3, tested with power control all Max.(LTE Band VII)
Test Channels (low-mid-high):	128-190-251(GSM850)
	512-661-810(GSM1900)
	9262-9400-9538(UMTS Band II)
	1312-1413-1512(UMTS Band IV)
	4132-4182-4233(UMTS Band V)
	18607-18900-19193(LTE Band II BW=1.4MHz)
	18615-18900-19185(LTE Band II BW=3MHz)
	18625-18900-19175(LTE Band II BW=5MHz)
	18650-18900-19150(LTE Band II BW=10MHz)
	18675-18900-19125(LTE Band II BW=15MHz)
	18700-18900-19100(LTE Band II BW=20MHz)
	19957-20175-20393(LTE Band IV BW=1.4MHz)
	19965-20175-20385(LTE Band IV BW=3MHz)
	19975-20175-20375(LTE Band IV BW=5MHz)
	20000-20175-20350(LTE Band IV BW=10MHz)
	20025-20175-20325(LTE Band IV BW=15MHz)
	20050-20175-20300(LTE Band IV BW=20MHz)
	20407-20525-20643(LTE Band V BW=1.4MHz)
	20415-20525-20635(LTE Band V BW=3MHz)
	20425-20525-20625(LTE Band V BW=5MHz)
	20450-20525-20600(LTE Band V BW=10MHz)
	20775-21100-21425(LTE Band VII BW=5MHz)
	20800-21100-21400(LTE Band VII BW=10MHz)
	20825-21100-21375(LTE Band VII BW=15MHz)
	20850-21100-21350(LTE Band VII BW=20MHz)
	1-6-11 (WiFi 2.4G)
	802.11a/11n 20M:36-40-44-48-52-56-60-64-100-104-108-112-116-132-136-140-149-153-157-161-165(WiFi 5G)
	802.11n 40M:38-46-54-62-102-110-134-151-159(WiFi 5G)

Table 3: Device information and operating configuration

Note : *-5600MHz-5650MHz is notched.

1.3.1 General Description

HUAWEI MT7-L09,MT7-L09 is subscriber equipment in the LTE/UMTS/GSM system. The LTE frequency band is Band I,Band II,Band III,Band IV,Band V,Band VII,Band VIII,Band XX,Band XXVIII and Band XL. But only Band II,Band IV, Band V , and Band VII.test data included in this report. The HSUPA/HSDPA/UMTS frequency band is Band I, Band II, Band IV,Band V and Band VIII, But only Band II, Band IV and Band V test data can be used in this report. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only GSM850 and DCS1900 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/UMTS/GSM protocol processing, voice, video, MMS service, GPS, AGPS WIFI and NFC etc. Externally it provides earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

Battery information:

Name	Manufacture	Serials number	Description
Rechargeable Li-Polymer	Huawei Technologies Co., Ltd.	NA	Battery Model: HB417094EBC Rated capacity: 4000mAh Nominal Voltage: $\text{---} +3.8\text{V}$ Charging Voltage: $\text{---} +4.35\text{V}$

1.3.2 Hotspot power reduction specification

This device uses a single fixed level of power reduction through static table look-up for SAR compliance and it is triggered by a single event or operation. A fixed level power reduction is applied when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered. The item II.C.1.k(ii) in KDB 388624D02v15r02 can be satisfied and PBA is not required.

Item	Description
Supporting power reduction or not	Yes
Frequency Band(s) using power reduction	GSM1900, UMTS Band II/IV,LTE Band II/IV/VII
Power reduction feature	A fixed power reduction is applied when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered.
Triggering conditions	Only hotspot mode (wireless routing) and nothing else is used to trigger this power reduction.
Full power and reduced power specifications	See Section 7.1
All simultaneous voice and data transmissions combinations and considerations	See Section 7.3

1.3.3 Dynamic antenna tuning specification

The device supports the dynamic antenna tuning function to optimize transmission efficiency for wide range frequency operations. It has two 2G/3G/4G Tx antennas. It can transmit from either Main Antenna or Secondary Antenna , but they can't transmit simultaneously.

During the SAR test, the Main Antenna / Secondary Antenna was set to the MAX transmit power level and SAR was tested respectively in all applicable RF exposure conditions to ensure the SAR compliance. Only one TX antenna is chosen at a time(See Section 7 for details).

1.3.4 Downlink LTE carrier aggregation specification

The device only supports downlink Rel. 10 LTE CA. It does not support uplink LTE CA. It does not support LTE CA between US LTE bands. The LTE FCC certification bands it supports are LTE B2, B4, B5 and B7. The LTE CA band combinations are B3+B3, B3+B5, B3+B7, B1+B5, B2+B28, B4+B28, B7+B20, B7+B8. Per KDB 941225 D05Av01r01, SAR testing and PBA requirements for downlink LTE-CA can be excluded(See Section 7.1.10 for details).

1.4 Test specification(s)

ANSI Std C95.1-1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.(IEEE Std C95.1-1991)
IEEE Std 1528-2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE Std 1528a-2005	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 4 of March 2010)
KDB941225 D01	SAR test for 3G devices v02
KDB941225 D02	HSPA and 1x Advanced v02r02
KDB941225 D03	SAR Test Reduction GSM GPRS EDGE v01
KDB941225 D05	SAR for LTE Devices v02r03
KDB941225 D05A	LTE Rel.10 KDB Inquiry Sheet v01r01
KDB941225 D06	Hot Spot SAR v01r01
KDB447498 D01	General RF Exposure Guidance v05r02
KDB648474 D04	Handsets SAR v01r02
KDB248227 D01	SAR meas for 802.11 a/b/g v01r02
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r03
KDB865664 D02	SAR Reporting v01r01
KDB690783 D01	SAR Listings on Grants v01r03

1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Zone K3,Huawei Industrial Base, Bantian Industry Area, Longgang District, Shenzhen, Guangdong, China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT #2174.01

1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.7 Application details


Start Date of test	2014-08-16
End Date of test	2014-08-27

1.8 Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2 SAR Measurement System

2.1 SAR Measurement Set-up

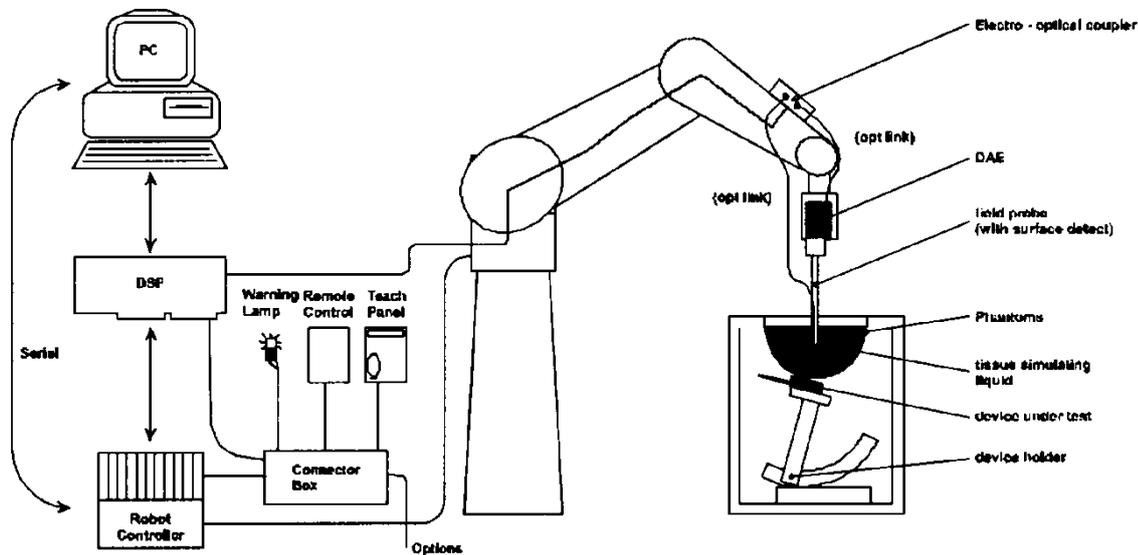

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

2.2 Test environment

The DASY5 measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.

The system allows the measurement of SAR values larger than 0.005 mW/g.

2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.


DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	

2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (± 2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

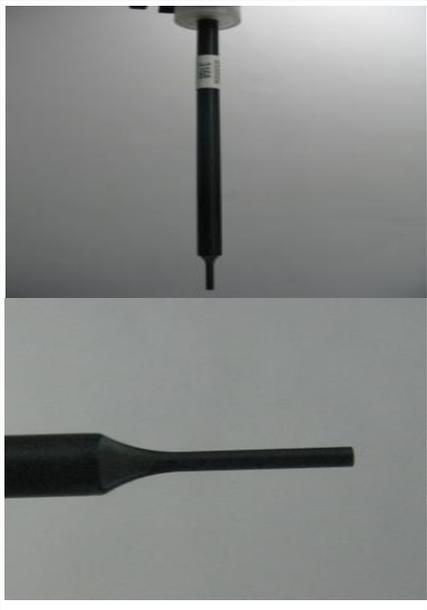Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	


2.5 Phantom description

SAM Twin Phantom

Shell Thickness	2mm±0.2mm;The ear region:6.0±0.2mm	
Filling Volume	Approximately 25 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

The following figure shows the definition of reference point:

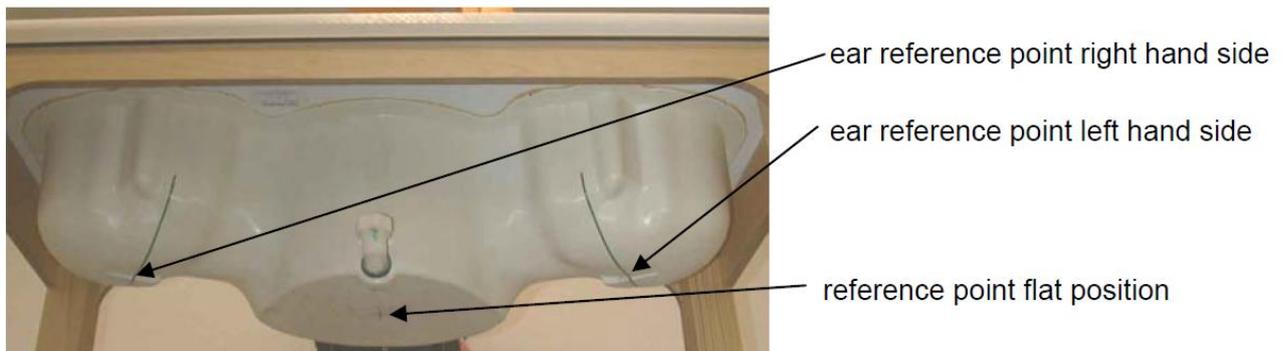

ELI4 Phantom

Shell Thickness	2mm±0.2mm	
Filling Volume	Approximately 30 liters	
Dimensions	Major axis:600mm; Minor axis:400mm;	
Measurement Areas	Flat phantom	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity $2 \leq \epsilon_r \leq 5$ at ≤ 3 GHz, $3 \leq \epsilon_r \leq 4$ at > 3 GHz and a loss tangent ≤ 0.05 .

2.6 Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\sigma = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The device holder permits the device to be positioned with a tolerance of $\pm 1^\circ$ in the tilt angle.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

	Manufacturer	Device	Type	Serial number	Date of last calibration	Valid period
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3898	2014-03-10	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3736	2014-04-24	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	ES3DV3	3168	2013-09-30	One year
<input checked="" type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d059	2013-05-02	Three years
<input checked="" type="checkbox"/>	SPEAG	1750 MHz Dipole	D1750V2	1123	2014-07-08	Three years
<input checked="" type="checkbox"/>	SPEAG	1900 MHz Dipole	D1900V2	5d143	2011-09-26	Three years
<input checked="" type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	860	2014-01-23	Three years
<input checked="" type="checkbox"/>	SPEAG	2600 MHz Dipole	D2600V2	1021	2011-11-22	Three years
<input checked="" type="checkbox"/>	SPEAG	5GHz Dipole	D5GHzV2	1155	2014-04-24	Three years
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	852	2014-04-30	One year
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1236	2013-11-25	One year
<input checked="" type="checkbox"/>	SPEAG	Software	DASY 5	N/A	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM1	TP-1475	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM2	TP-1474	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM3	TP-1597	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM4	TP-1620	NCR	NCR
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1038	NCR	NCR
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1111	NCR	NCR
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	111379	2014-07-11	One year
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMW 500	126855	2014-07-11	One year
<input checked="" type="checkbox"/>	Agilent	Network Analyser	E5071C	MY46213349	2014-02-25	One year
<input checked="" type="checkbox"/>	Agilent	Dielectric Probe Kit	85070E	2484	NCR	NCR
<input checked="" type="checkbox"/>	Agilent	Signal Generator	N5181A	MY47420989	2014-01-18	One year
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1402001	NCR	NCR
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZVE-8G+	129601322	NCR	NCR
<input checked="" type="checkbox"/>	AR	Directional Coupler	DC7144M1	0423264	2014-04-02	One year
<input checked="" type="checkbox"/>	R & S	Power Meter	NRP	100740	2014-07-11	One year
<input checked="" type="checkbox"/>	R & S	Power Meter Sensor	NRP-Z11	106288	2014-07-11	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4417A	MY45101339	2014-01-18	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY44420359	2014-01-18	One year

Note:

1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
- d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

3 SAR Measurement Procedure

3.1 Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$, 2-4GHz - $\leq 5\text{ mm}$ and 4-6 GHz- $\leq 4\text{mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$, 3-4 GHz- $\leq 4\text{mm}$ and 4-6GHz- $\leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximun Zoom Scan spatial resolution ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	$\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	$\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1)$	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	$\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	$\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	$\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1)$	≥22mm

3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points(with 8mm horizontal resolution) or 7 x 7 x 7 points(with 5mm horizontal resolution) or 8 x 8 x 7 points(with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensates boundary effects on E-field probes.

3.3 Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a ₁₀ , a ₁₁ , a ₁₂
	- Conversion factor	ConvF _i
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with	V _i	= compensated signal of channel i	(i = x, y, z)
	U _i	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field (DASY parameter)	
	dcp _i	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$
 H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

with V_i = compensated signal of channel i (i = x, y, z)
 $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
 [mV/(V/m)²] for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

4 System Verification Procedure

4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Head Tissue					
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	39.2	41.45	52.64	55.242	62.7	55.242
Salt (NaCl)	2.7	1.45	0.36	0.306	0.5	0.306
Sugar	57.0	56.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	44.542	36.8	44.452
Ingredients (% of weight)	Body Tissue					
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	50.3	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M Ω + resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Simulating Head Liquid for 5G(HBBL3500-5800MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	50-65%
Mineral oil	10-30%
Emulsifiers	8-25%
Sodium salt	0-1.5%

Simulating Body Liquid for 5G (MBBL3500-5800MHz),Manufactured by SPEAG:

Ingredients	(% by weight)
Water	60-80%
Esters,Emulsifiers,Inhibitors	20-40%
Sodium salt	0-1.5%

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r (+/-5%)	σ (S/m) (+/-5%)	ϵ_r	σ (S/m)		
835H	825	41.60 (39.52~43.68)	0.90 (0.86~0.95)	41.02	0.918	21.4°C	2014-08-17
	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	40.88	0.926		
	850	41.50 (39.43~43.58)	0.92 (0.87~0.96)	40.66	0.940		
835H	825	41.60 (39.52~43.68)	0.90 (0.86~0.95)	41.05	0.919	21.4°C	2014-08-18
	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	40.91	0.927		
	850	41.50 (39.43~43.58)	0.92 (0.87~0.96)	40.69	0.941		
835B	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	53.50	0.946	21.4°C	2014-08-17
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	53.39	0.956		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	53.24	0.972		
1750H	1710	40.1 (38.10~42.11)	1.35 (1.28~1.42)	40.83	1.305	21.4°C	2014-08-17
	1730	40.1 (38.10~42.11)	1.36 (1.29~1.43)	40.78	1.325		
	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	40.71	1.341		
	1800	40.0 (38.00~42.00)	1.40 (1.33~1.47)	40.47	1.370		
1750B	1710	53.5 (50.83~56.18)	1.46 (1.39~1.53)	51.83	1.479	21.4°C	2014-08-22
	1730	53.5 (50.83~56.18)	1.48 (1.41~1.55)	51.74	1.497		
	1750	53.4 (50.73~56.07)	1.49 (1.42~1.56)	51.64	1.516		
	1800	53.3 (50.64~55.97)	1.52 (1.44~1.60)	51.46	1.557		
1750B	1710	53.5 (50.83~56.18)	1.46 (1.39~1.53)	50.97	1.503	21.4°C	2014-08-20
	1730	53.5 (50.83~56.18)	1.48 (1.41~1.55)	50.94	1.521		
	1750	53.4 (50.73~56.07)	1.49 (1.42~1.56)	50.91	1.535		
	1800	53.3 (50.64~55.97)	1.52 (1.44~1.60)	50.75	1.553		
1900H	1850	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.88	1.338	21.4°C	2014-08-16
	1880	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.76	1.358		
	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.71	1.376		
	1910	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.67	1.386		

1900B	1850	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.25	1.485	21.4°C	2014-08-20
	1880	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.13	1.510		
	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.05	1.524		
	1910	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.01	1.531		
2450H	2410	39.30 (37.34~41.26)	1.76 (1.67~1.85)	39.92	1.738	21.4°C	2014-08-22
	2435	39.20 (37.24~41.16)	1.79 (1.70~1.88)	39.79	1.761		
	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	39.76	1.777		
	2460	39.20 (37.24~41.16)	1.81 (1.72~1.90)	39.69	1.794		
2450B	2410	52.80 (50.16~55.44)	1.91 (1.81~2.00)	50.90	1.885	21.4°C	2014-08-25
	2435	52.70 (50.07~55.34)	1.94 (1.84~2.04)	50.86	1.914		
	2450	52.70 (50.07~55.34)	1.95 (1.85~2.05)	50.81	1.931		
	2460	52.70 (50.07~55.34)	1.96 (1.86~2.06)	50.78	1.942		
2600H	2510	39.12 (37.16~41.01)	1.86 (1.77~1.96)	39.72	1.891	21.4°C	2014-08-22
	2535	39.1 (37.13~41.04)	1.89 (1.80~1.98)	39.65	1.921		
	2560	39 (37.05~40.95)	1.917 (1.82~2.01)	39.56	1.947		
	2600	39 (37.05~40.95)	1.96 (1.86~2.05)	39.36	1.992		
2600B	2510	52.62 (49.99~55.25)	2.03 (1.93~2.13)	51.62	2.118	21.4°C	2014-08-25
	2535	52.59 (49.96~55.22)	2.07 (1.97~2.17)	51.59	2.149		
	2560	52.57 (49.94~55.20)	2.09 (1.99~2.19)	51.50	2.181		
	2600	52.5 (49.88~55.13)	2.16 (2.05~2.27)	51.35	2.239		
5G Head	5200	36.0 (34.20~37.80)	4.66 (4.43~4.89)	34.95	4.817	21.6°C	2014-08-27
	5300	36.0 (34.20~37.80)	4.66 (4.43~4.89)	35.47	4.797		2014-08-27
	5600	35.5 (33.73~37.28)	5.07 (4.82~5.32)	34.61	5.048		2014-08-27
	5800	35.3 (33.54~37.07)	5.27 (5.01~5.53)	35.09	5.344		2014-08-27

5G Body	5200	49.0 (46.55~51.45)	5.30 (5.03~5.56)	49.21	5.263	21.6°C	2014-08-26
	5300	49.0 (46.55~51.45)	5.30 (5.03~5.56)	48.00	5.390		2014-08-26
	5600	48.5 (46.08~50.93)	5.77 (5.48~6.06)	49.04	5.733		2014-08-26
	5800	48.20 (45.79~50.61)	6.00 (5.70~6.30)	47.48	6.144		2014-08-26
ϵ_r = Relative permittivity, σ = Conductivity							

Table 5: Measured Tissue Parameter

Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

4.2 System Check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests(Graphic Plot(s) see Appendix A).


System Check	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)		
835MHz Head	9.49 (8.54~10.44)	6.18 (5.56~6.80)	9.56	6.16	21.4°C	2014-08-17
835MHz Head	9.49 (8.54~10.44)	6.18 (5.56~6.80)	9.76	6.36	21.4°C	2014-08-18
1750MHz Head	35.1 (31.59~38.61)	18.6 (16.74~20.46)	33.96	18.24	21.4°C	2014-08-17
1900MHz Head	40.60 (36.54~44.66)	21.20 (19.08~23.32)	37.68	19.88	21.4°C	2014-08-16
2450MHz Head	52.60 (47.34~57.86)	24.50 (22.05~26.95)	51.20	23.56	21.4°C	2014-08-22
2600MHz Head	58.8 (52.92~64.68)	26.4 (23.76~29.04)	60.80	26.96	21.4°C	2014-08-22
5200MHz Head	78.8 (70.92~86.68)	22.5 (20.25~24.75)	78.40	22.50	21.6°C	2014-08-27
5300MHz Head	83.9 (75.51~92.29)	23.9 (21.51~26.29)	87.20	24.70	21.6°C	2014-08-27
5600MHz Head	82.4 (74.16~90.64)	23.4 (21.06~25.74)	86.30	24.40	21.6°C	2014-08-27
5800MHz Head	79.5 (71.55~87.45)	22.5 (20.25~24.75)	83.20	23.40	21.6°C	2014-08-27
835MHz Body	9.42 (8.48~10.36)	6.19 (5.57~6.80)	9.64	6.36	21.4°C	2014-08-17
1750MHz Body	36.3 (32.67~39.93)	19.5 (17.55~21.45)	38.08	19.92	21.4°C	2014-08-22
1750MHz Body	36.3 (32.67~39.93)	19.5 (17.55~21.45)	38.24	20.40	21.4°C	2014-08-20
1900MHz Body	41.40 (37.26~45.54)	21.80 (19.62~23.98)	43.20	22.52	21.4°C	2014-08-20
2450MHz Body	50.6 (45.54~55.66)	23.7 (21.33~26.07)	52.00	23.84	21.4°C	2014-08-25
2600MHz Body	55.6 (50.04~61.16)	24.9 (22.41~27.39)	60.40	26.20	21.4°C	2014-08-25
5200MHz Body	77.6 (69.84~85.36)	21.6 (19.44~23.76)	75.70	21.00	21.6°C	2014-08-26
5300MHz Body	78.5 (70.65~86.35)	22.0 (19.80~24.20)	80.80	22.30	21.6°C	2014-08-26
5600MHz Body	83.1 (74.79~91.41)	22.9 (20.61~25.19)	86.00	23.50	21.6°C	2014-08-26
5800MHz Body	76.7 (69.03~84.37)	21.2 (19.08~23.32)	80.70	22.30	21.6°C	2014-08-26

Table 6: System Check Results

4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW(below 5GHz) or 100mW(above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

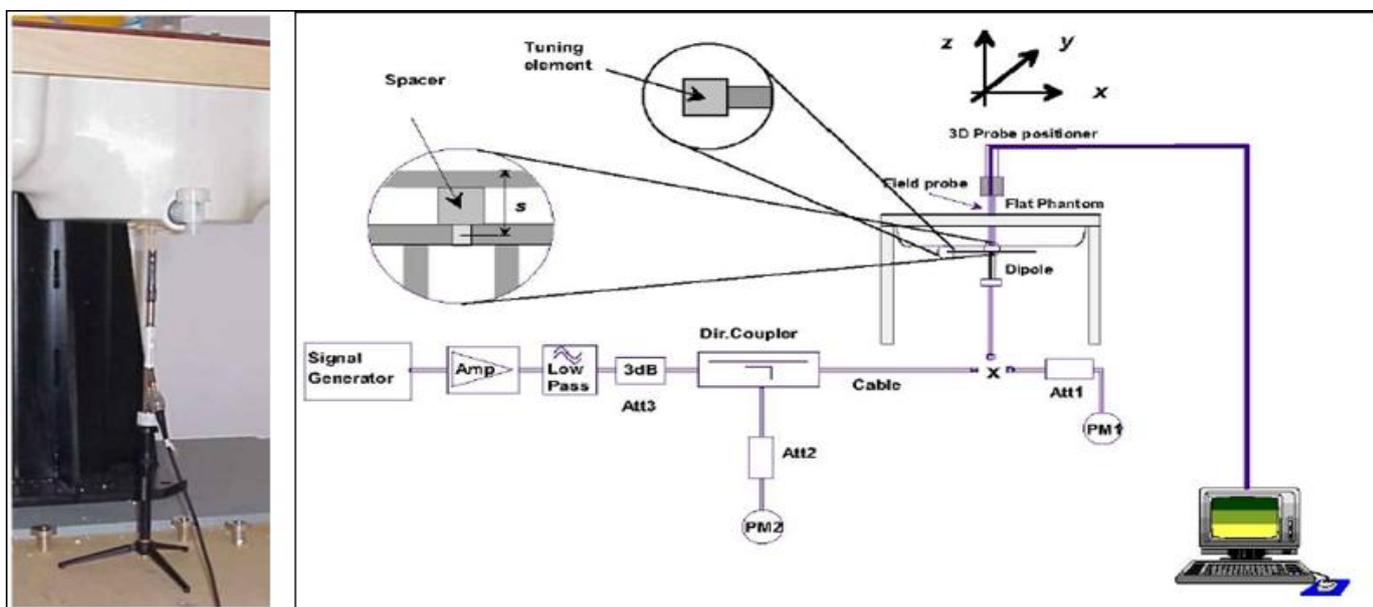

5 SAR measurement variability and uncertainty

5.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r03, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.

5.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2003 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6 SAR Test Configuration

6.1 GSM Test Configuration

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to “5”and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot.

The allowed power reduction in the multi-slot configuration is as following:

Number of timeslots in uplink assignment		Reduction of maximum output power (dB)		
Band	Time Slots	GPRS (GMSK)	EGPRS (GMSK)	EGPRS (8PSK)
GSM850	1 TX slot	0	0	0
	2 TX slots	2	2	2
	3 TX slots	4	4	4
	4 TX slots	6	6	6
GSM1900	1 TX slot	0	0	0
	2 TX slots	2	2	2
	3 TX slots	4	4	4
	4 TX slots	6	6	6

Table 7: The allowed power reduction in the multi-slot configuration of GSM

6.2 UMTS Test Configuration

1) Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the procedures description in section 5.2 of 3GPP TS 34.121,using the appropriate RMC or AMR with TPC(transmit power control) set to all “1s” for WCDMA/HSDPA or applying the required inner loop power control procedure to maintain maximum output power while HSUPA is active. Result for all applicable physical channel configurations(DPCCH,DPDCHn and spreading codes, HSDPA, HSPA)

Should be tabulated in the SAR report .All configuration that are not supported by the DUT or cannot be measured due to technical or equipment limitation should be clearly identified.

2) WCDMA

a. Head SAR Measurements

SAR for Head exposure configurations in voice mode is measured using a 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2 kbps RMC. Otherwise SAR is measured on the maximum output channel in 12.2 kbps AMR with 3.4kbps SRB(signalling radio bearer) using the exposure configuration that results in the highest SAR in 12.2kbps RMC for that RF channel.

b. Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all "1s". SAR for other spreading codes and multiple DPDCHn, when supported by the EUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCHn configuration, are less than ¼ dB higher than those measured in 12.2 kbps RMC.

3) HSDPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when ΔACK , $\Delta NACK$, $\Delta CQI = 8$. The variation of the β_c / β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test [Ⓢ]	β_c [Ⓢ]	β_d [Ⓢ]	β_d (SF) [Ⓢ]	β_c/β_d [Ⓢ]	β_{hs} (1) [Ⓢ]	CM(dB)(2) [Ⓢ]	MPR (dB) [Ⓢ]
1 [Ⓢ]	2/15 [Ⓢ]	15/15 [Ⓢ]	64 [Ⓢ]	2/15 [Ⓢ]	4/15 [Ⓢ]	0.0 [Ⓢ]	0 [Ⓢ]
2 [Ⓢ]	12/15(3) [Ⓢ]	15/15(3) [Ⓢ]	64 [Ⓢ]	12/15(3) [Ⓢ]	24/15 [Ⓢ]	1.0 [Ⓢ]	0 [Ⓢ]
3 [Ⓢ]	15/15 [Ⓢ]	8/15 [Ⓢ]	64 [Ⓢ]	15/8 [Ⓢ]	30/15 [Ⓢ]	1.5 [Ⓢ]	0.5 [Ⓢ]
4 [Ⓢ]	15/15 [Ⓢ]	4/15 [Ⓢ]	64 [Ⓢ]	15/4 [Ⓢ]	30/15 [Ⓢ]	1.5 [Ⓢ]	0.5 [Ⓢ]

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ [Ⓢ]
 Note 2 : CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.[Ⓢ]
 Note 3 : For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$ [Ⓢ]

Table 8: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 9: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 10:HSDPA UE category

4) HSUPA

Body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-set 1 and QPSK for FRC and 12.2kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Device' sections of 3G device.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ec} (SF)	β_{ed} (code)	CM ⁽²⁾ (dB)	MP R ⁽³⁾ (dB)	AG ⁽⁴⁾ Index	E-TFC I
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta ACK, \Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference
 Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$
 Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$
 Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g
 Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Table 11:Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).

Table 12:HSUPA UE category

5) DC-HSDPA

In DC-HSDPA implementation of this device, the uplink parameters are the same as HSDPA. No additional channels and modulations (16 QAM, and 64 QAM) are supported in uplink. The difference is only in the downlink parameters, where two carriers are supported. HSDPA settings were used on uplink.

For Rel. 8 DC-HSDPA apply the four subtests from HSDPA Release 5 except use fixed reference channel H-Set 12 for DC-HSDPA. And we can apply the same SAR test exclusion criteria used for Rel. 6 HSPA for Rel. 7 HSPA+ and Rel. 8 DC-HSDPA. That is, if the HSPA, HSPA+, or the DC-HSDPA maximum output is not more than 0.25 dB higher than WCDMA, SAR measurement for those modes is not required.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/lor	dB	-10
P-CCPCH and SCH_Ec/lor	dB	-12
PICH_Ec/lor	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/lor	dB	-5
OCNS_Ec/lor	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 13: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

- 1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
- 2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

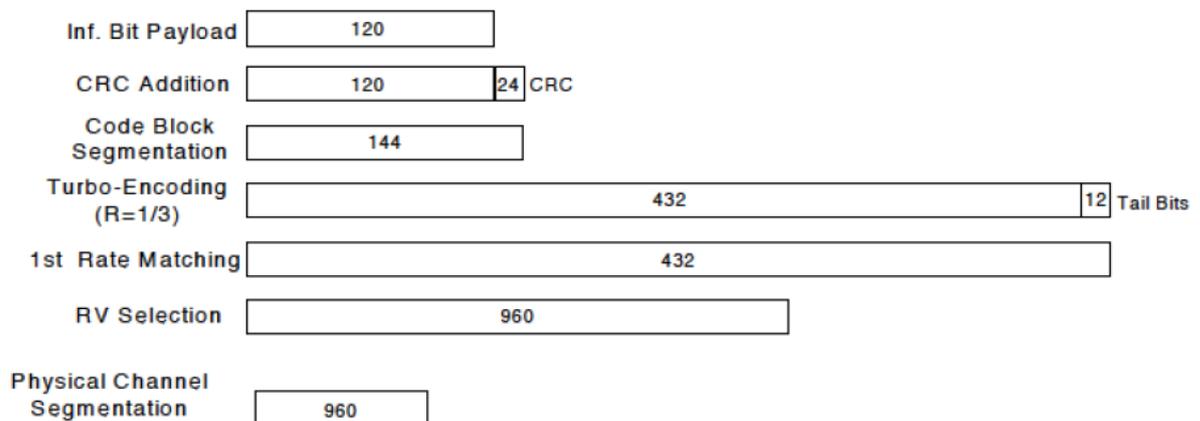


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c/β_d ^o	$\beta_{hs}(1)$ ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: Δ ACK, Δ NACK and Δ CQI=8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ ^o

Note 2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.^o

Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$ ^o

Up commands are set continuously to set the UE to Max power.

Note:

- 1.The Dual Carriers transmission only applies to HSDPA physical channels
- 2.The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4.The Dual Carriers operate in the same frequency band .
- 5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
- 6.The device doesn't support carrier aggregation for it just can operate in Release 8.

6.3 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02r03. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames(Maximum TTI)

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101:

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The LTE Band II (Hotspot disabled) MPR of the device is as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR
	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	≤5	≤4	≤8	≤ 12	≤16	≤ 18	0
QPSK	>5	>4	>8	> 12	>16	> 18	0
16 QAM	≤5	≤4	≤8	≤ 12	≤16	≤ 18	1
16 QAM	>5	>4	>8	> 12	>16	> 18	1

The LTE Band II (Hotspot activated) MPR of the device is as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR
	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	≤5	≤4	≤8	≤ 12	≤16	≤ 18	0
QPSK	>5	>4	>8	> 12	>16	> 18	0
16 QAM	≤5	≤4	≤8	≤ 12	≤16	≤ 18	0
16 QAM	>5	>4	>8	> 12	>16	> 18	0

The LTE Band IV (Hotspot disabled) MPR of the device is as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR
	1.4	3	5	10	15	20	
	MHz	MHz	MHz	MHz	MHz	MHz	
QPSK	≤5	≤4	≤8	≤ 12	≤16	≤ 18	0
QPSK	>5	>4	>8	> 12	>16	> 18	0.5
16 QAM	≤5	≤4	≤8	≤ 12	≤16	≤ 18	0.5
16 QAM	>5	>4	>8	> 12	>16	> 18	1.5

The LTE Band IV(Hotspot activated) MPR of the device is as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR
	1.4	3	5	10	15	20	
	MHz	MHz	MHz	MHz	MHz	MHz	
QPSK	≤5	≤4	≤8	≤ 12	≤16	≤ 18	0
QPSK	>5	>4	>8	> 12	>16	> 18	1
16 QAM	≤5	≤4	≤8	≤ 12	≤16	≤ 18	1
16 QAM	>5	>4	>8	> 12	>16	> 18	2

The LTE Band V MPR of the device is as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]				MPR
	1.4	3	5	10	
	MHz	MHz	MHz	MHz	
QPSK	≤5	≤4	≤8	≤ 12	0
QPSK	>5	>4	>8	> 12	1
16 QAM	≤5	≤4	≤8	≤ 12	0.5
16 QAM	>5	>4	>8	> 12	2

The LTE Band VII(Hotspot disabled) MPR of the device is as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]				MPR
	5	10	15	20	
	MHz	MHz	MHz	MHz	
QPSK	≤8	≤ 12	≤16	≤ 18	0
QPSK	>8	> 12	>16	> 18	0
16 QAM	≤8	≤ 12	≤16	≤ 18	0
16 QAM	>8	> 12	>16	> 18	0.5

The LTE Band VII(Hotspot activated) MPR of the device is as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]				MPR
	5	10	15	20	
	MHz	MHz	MHz	MHz	
QPSK	≤8	≤ 12	≤16	≤ 18	0
QPSK	>8	> 12	>16	> 18	0
16 QAM	≤8	≤ 12	≤16	≤ 18	0
16 QAM	>8	> 12	>16	> 18	0.5

3) A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS_01" on the base station simulator.

4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

6.4 WiFi 2.4G Test Configuration

For the 802.11b/g SAR tests, a communication link is set up with the test mode software for WiFi mode test. The Absolute Radio Frequency Channel Number(ARFCN) is allocated to 1, 6 and 11 respectively in the case of 2450 MHz. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate.

802.11b/g operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g modes are tested on channel 1, 6, 11; however, if output power reduction is necessary for channels 1 and/or 11 to meet restricted band requirements the highest output channel closest to each of these channels must be tested instead.

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1#	√	△
		2.437	6	√	△
		2.462	11#	√	△

Notes:

√ = "default test channels"

△ = possible 802.11g channels with maximum average output 1/4 dB the "default test channels"

= when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

802.11 Test Channels per FCC KDB 248227

6.5 WiFi 5G Test Configuration

For the 802.11a SAR tests, a communication link is set up with the test mode software for WiFi mode test. 802.11a operating modes are tested independently according to the service requirements in each 5G WiFi frequency band. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate.

Per KDB248227, for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate. When 802.11n-HT20 and 11n-HT40 output power is less than 0.25dB higher than 802.11a, the SAR can be excluded.

7 SAR Measurement Results

7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200&CMW500 was used. SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

Note: CMU200 measures GSM peak and average output power for active timeslots. For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
timebased avg. power compared to slotted avg. power	-9.19dB	-6.13dB	-4.42dB	-3.18dB

The signalling modes differ as follows:

mode	coding scheme	modulation
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

7.1.1 Conducted power measurements of GSM850

GSM850		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		128CH	190CH	251CH		128CH	190CH	251CH
GSM (CS)		32.96	32.98	33.00	-9.19	23.77	23.79	23.81
GPRS/ EDGE (GMSK)	1 Tx Slot	32.98	32.97	32.99	-9.19	23.79	23.78	23.80
	2 Tx Slots	31.03	31.06	31.03	-6.13	24.90	24.93	24.90
	3 Tx Slots	28.99	28.98	28.99	-4.42	24.57	24.56	24.57
	4 Tx Slots	26.97	26.98	27.00	-3.18	23.79	23.80	23.82
EDGE (8PSK)	1 Tx Slot	27.28	27.32	27.27	-9.19	18.09	18.13	18.08
	2 Tx Slots	24.70	24.71	24.81	-6.13	18.57	18.58	18.68
	3 Tx Slots	22.33	22.41	22.37	-4.42	17.91	17.99	17.95
	4 Tx Slots	21.11	21.20	21.18	-3.18	17.93	18.02	18.00

Table 14:Conducted power measurement results of GSM850(Main Antenna)

GSM850		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		128CH	190CH	251CH		128CH	190CH	251CH
GSM (CS)		32.93	32.95	32.95	-9.19	23.74	23.76	23.76
GPRS/ EDGE (GMSK)	1 Tx Slot	32.94	32.93	32.95	-9.19	23.75	23.74	23.76
	2 Tx Slots	31.00	31.03	31.03	-6.13	24.87	24.90	24.90
	3 Tx Slots	28.94	28.97	28.95	-4.42	24.52	24.55	24.53
	4 Tx Slots	26.94	26.95	26.96	-3.18	23.76	23.77	23.78
EDGE (8PSK)	1 Tx Slot	27.26	27.26	27.23	-9.19	18.07	18.07	18.04
	2 Tx Slots	24.66	24.70	24.78	-6.13	18.53	18.57	18.65
	3 Tx Slots	22.30	22.36	22.36	-4.42	17.88	17.94	17.94
	4 Tx Slots	21.06	21.15	21.18	-3.18	17.88	17.97	18.00

Table 15:Conducted power measurement results of GSM850(Secondary Antenna)

Note:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB 941225 D03v01,the bolded GPRS 2Tx mode was selected for SAR testing according to the highest frame –averaged output power table.

7.1.2 Conducted power measurements of GSM1900

GSM1900		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
GSM (CS)		29.81	29.76	29.81	-9.19	20.62	20.57	20.62
GPRS/ EDGE (GMSK)	1 Tx Slot	29.81	29.76	29.84	-9.19	20.62	20.57	20.65
	2 Tx Slots	27.81	27.80	27.79	-6.13	21.68	21.67	21.66
	3 Tx Slots	25.86	25.78	25.82	-4.42	21.44	21.36	21.40
	4 Tx Slots	23.83	23.82	23.87	-3.18	20.65	20.64	20.69
EDGE (8PSK)	1 Tx Slot	25.98	26.00	25.95	-9.19	16.79	16.81	16.76
	2 Tx Slots	23.64	23.78	23.75	-6.13	17.51	17.65	17.62
	3 Tx Slots	21.16	21.19	21.15	-4.42	16.74	16.77	16.73
	4 Tx Slots	19.82	19.78	19.80	-3.18	16.64	16.60	16.62

Table 16: Conducted power measurement results of GSM1900(Main Antenna, Hotspot disabled)

GSM1900		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
GSM (CS)		29.76	29.73	29.78	-9.19	20.57	20.54	20.59
GPRS/ EDGE (GMSK)	1 Tx Slot	29.77	29.71	29.78	-9.19	20.58	20.52	20.59
	2 Tx Slots	27.78	27.77	27.78	-6.13	21.65	21.64	21.65
	3 Tx Slots	25.82	25.77	25.78	-4.42	21.40	21.35	21.36
	4 Tx Slots	23.79	23.77	23.84	-3.18	20.61	20.59	20.66
EDGE (8PSK)	1 Tx Slot	25.94	25.95	25.93	-9.19	16.75	16.76	16.74
	2 Tx Slots	23.62	23.75	23.72	-6.13	17.49	17.62	17.59
	3 Tx Slots	21.14	21.14	21.13	-4.42	16.72	16.72	16.71
	4 Tx Slots	19.77	19.73	19.78	-3.18	16.59	16.55	16.60

Table 17: Conducted power measurement results of GSM1900(Secondary Antenna, Hotspot disabled)

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB648474 D04v01r02, body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.

GSM1900		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
GSM (CS)		26.80	26.61	26.44	-9.19	17.61	17.42	17.25
GPRS/ EDGE (GMSK)	1 Tx Slot	26.81	26.63	26.47	-9.19	17.62	17.44	17.28
	2 Tx Slots	24.82	24.62	24.50	-6.13	18.69	18.49	18.37
	3 Tx Slots	22.77	22.58	22.53	-4.42	18.35	18.16	18.11
	4 Tx Slots	20.80	20.68	20.62	-3.18	17.62	17.50	17.44
EDGE (8PSK)	1 Tx Slot	22.35	22.40	22.53	-9.19	13.16	13.21	13.34
	2 Tx Slots	20.04	20.05	20.17	-6.13	13.91	13.92	14.04
	3 Tx Slots	17.70	17.74	17.92	-4.42	13.28	13.32	13.50
	4 Tx Slots	16.36	16.46	16.51	-3.18	13.18	13.28	13.33

Table 18: Conducted power measurement results of GSM1900(Main Antenna, Hotspot activated)

GSM1900		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
GSM (CS)		26.76	26.56	26.41	-9.19	17.57	17.37	17.22
GPRS/ EDGE (GMSK)	1 Tx Slot	26.77	26.61	26.44	-9.19	17.58	17.42	17.25
	2 Tx Slots	24.79	24.59	24.46	-6.13	18.66	18.46	18.33
	3 Tx Slots	22.71	22.55	22.50	-4.42	18.29	18.13	18.08
	4 Tx Slots	20.78	20.62	20.58	-3.18	17.60	17.44	17.40
EDGE (8PSK)	1 Tx Slot	22.30	22.37	22.53	-9.19	13.11	13.18	13.34
	2 Tx Slots	19.95	20.01	20.13	-6.13	13.82	13.88	14.00
	3 Tx Slots	17.68	17.68	17.88	-4.42	13.26	13.26	13.46
	4 Tx Slots	16.30	16.42	16.49	-3.18	13.12	13.24	13.31

Table 19: Conducted power measurement results of GSM1900(Secondary Antenna, Hotspot activated)

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB 941225 D03v01, the bolded GPRS 2Tx mode was selected for SAR testing according to the highest frame –averaged output power table.

7.1.3 Conducted power measurements of UMTS Band V

UMTS Band V		Conducted Power (dBm)		
		4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	23.68	23.63	23.58
	64kbps RMC	23.58	23.61	23.59
	144kbps RMC	23.58	23.59	23.58
	384kbps RMC	23.58	23.63	23.57
HSDPA	Subtest 1	23.46	23.45	23.49
	Subtest 2	22.70	22.68	22.69
	Subtest 3	21.95	21.99	22.01
	Subtest 4	21.94	22.10	21.98
HSUPA	Subtest 1	20.99	20.51	21.78
	Subtest 2	20.10	20.07	20.10
	Subtest 3	21.23	21.26	21.14
	Subtest 4	20.22	20.25	20.37
	Subtest 5	21.86	21.91	21.46
DC-HSDPA	Subtest 1	23.42	23.40	23.35
	Subtest 2	22.56	22.57	22.55
	Subtest 3	21.84	21.87	21.89
	Subtest 4	21.80	21.99	21.86

Table 20: Conducted power measurement results of UMTS Band V(Main Antenna)

UMTS Band V		Conducted Power (dBm)		
		4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	23.65	23.58	23.55
	64kbps RMC	23.56	23.58	23.58
	144kbps RMC	23.55	23.58	23.55
	384kbps RMC	23.52	23.59	23.55
HSDPA	Subtest 1	23.49	23.48	23.45
	Subtest 2	22.65	22.66	22.67
	Subtest 3	21.93	21.96	21.99
	Subtest 4	21.89	22.07	21.94
HSUPA	Subtest 1	20.96	20.47	21.75
	Subtest 2	20.06	20.07	20.11
	Subtest 3	21.20	21.25	21.11
	Subtest 4	20.18	20.22	20.34
	Subtest 5	21.83	21.87	21.42
DC-HSDPA	Subtest 1	23.38	23.36	23.34
	Subtest 2	22.55	22.54	22.53
	Subtest 3	21.80	21.83	21.86
	Subtest 4	21.76	21.95	21.84

Table 21: Conducted power measurement results of UMTS Band V(Secondary Antenna)

Note:

- 1) The conducted power of UMTS Band V is measured with RMS detector.
- 2) Per KDB941225 D01v02, when maximum output of each RF channel with HSDPA/HSUPA active is $\leq \frac{1}{4}$ dB higher than without HSDPA/HSUPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of SAR limit, SAR evaluation for HSDPA/HSUPA is not required.
- 3) Per KDB941225 D02v02r02, when the maximum average output power of each RF channel with (uplink) HSPA+/DC-HSDPA active is $\leq \frac{1}{4}$ dB higher than that measured without HSPA+/DC-HSDPA

using 12.2 kbps RMC, or the maximum reported SAR for 12.2 kbps RMC without HSPA+/DC-HSDPA/ is $\leq 75\%$ of the SAR limit, SAR evaluation for HSPA+/DC-HSDPA is not required.

7.1.4 Conducted power measurements of UMTS Band IV

UMTS Band IV		Conducted Power (dBm)		
		1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	23.55	23.27	23.37
	64kbps RMC	23.63	23.25	23.31
	144kbps RMC	23.61	23.25	23.39
	384kbps RMC	23.60	23.24	23.38
HSDPA	Subtest 1	23.46	23.38	23.35
	Subtest 2	21.96	21.85	21.92
	Subtest 3	21.47	21.22	21.34
	Subtest 4	21.47	21.19	21.31
HSUPA	Subtest 1	19.58	20.02	20.13
	Subtest 2	18.58	19.24	19.34
	Subtest 3	20.69	20.47	20.51
	Subtest 4	19.75	19.50	19.50
	Subtest 5	21.20	21.27	21.31
DC-HSDPA	Subtest 1	23.34	23.24	23.22
	Subtest 2	21.90	21.73	21.78
	Subtest 3	21.38	21.08	21.23
	Subtest 4	21.36	21.09	21.21

Table 22: Conducted power measurement results of UMTS Band IV(Main Antenna, Hotspot disabled)

UMTS Band IV		Conducted Power (dBm)		
		1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	23.53	23.23	23.33
	64kbps RMC	23.59	23.25	23.32
	144kbps RMC	23.58	23.24	23.36
	384kbps RMC	23.55	23.21	23.36
HSDPA	Subtest 1	23.43	23.32	23.32
	Subtest 2	21.99	21.82	21.90
	Subtest 3	21.47	21.17	21.33
	Subtest 4	21.45	21.17	21.29
HSUPA	Subtest 1	19.55	19.98	20.09
	Subtest 2	18.55	19.23	19.34
	Subtest 3	20.66	20.52	20.52
	Subtest 4	19.69	19.46	19.47
	Subtest 5	21.17	21.21	21.28
DC-HSDPA	Subtest 1	23.30	23.20	23.21
	Subtest 2	21.89	21.70	21.76
	Subtest 3	21.34	21.04	21.20
	Subtest 4	21.32	21.05	21.19

Table 23: Conducted power measurement results of UMTS Band IV(Secondary Antenna, Hotspot disabled)

Note:

- 1) The conducted power of UMTS Band IV is measured with RMS detector.
- 2) Per KDB941225 D01v02, when maximum output of each RF channel with HSDPA/HSUPA active is $\leq \frac{1}{4}$ dB higher than without HSDPA/HSUPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of SAR limit, SAR evaluation for HSDPA/HSUPA is not required.

3) Per KDB941225 D02v02r02, when the maximum average output power of each RF channel with (uplink) HSPA+/DC-HSDPA active is $\leq 1/4$ dB higher than that measured without HSPA+/DC-HSDPA using 12.2 kbps RMC, or the maximum reported SAR for 12.2 kbps RMC without HSPA+/DC-HSDPA/ is $\leq 75\%$ of the SAR limit, SAR evaluation for HSPA+/DC-HSDPA is not required.

UMTS Band IV		Conducted Power (dBm)		
		1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	18.96	18.91	18.72
	64kbps RMC	18.91	18.84	18.68
	144kbps RMC	18.92	18.88	18.72
	384kbps RMC	18.91	18.92	18.68
HSDPA	Subtest 1	18.95	18.94	18.69
	Subtest 2	17.47	17.49	17.28
	Subtest 3	16.80	16.95	16.72
	Subtest 4	16.79	16.68	16.42
HSUPA	Subtest 1	14.93	15.30	14.50
	Subtest 2	15.63	15.85	15.33
	Subtest 3	16.79	16.17	16.36
	Subtest 4	19.42	18.76	19.18
	Subtest 5	19.90	19.21	19.33
DC-HSDPA	Subtest 1	18.83	18.80	18.56
	Subtest 2	17.33	17.37	17.14
	Subtest 3	16.68	16.81	16.61
	Subtest 4	16.65	16.58	16.32

Table 24: Conducted power measurement results of UMTS Band IV(Main Antenna, Hotspot activated)

UMTS Band IV		Conducted Power (dBm)		
		1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	18.94	18.87	18.68
	64kbps RMC	18.87	18.84	18.69
	144kbps RMC	18.89	18.87	18.69
	384kbps RMC	18.86	18.89	18.66
HSDPA	Subtest 1	18.92	18.88	18.66
	Subtest 2	17.42	17.46	17.26
	Subtest 3	16.77	16.90	16.71
	Subtest 4	16.74	16.66	16.40
HSUPA	Subtest 1	14.90	15.26	14.46
	Subtest 2	15.60	15.84	15.33
	Subtest 3	16.76	16.16	16.33
	Subtest 4	19.36	18.72	19.15
	Subtest 5	19.87	19.15	19.30
DC-HSDPA	Subtest 1	18.79	18.76	18.55
	Subtest 2	17.32	17.34	17.12
	Subtest 3	16.64	16.77	16.58
	Subtest 4	16.61	16.54	16.30

Table 25: Conducted power measurement results of UMTS Band IV(Secondary Antenna, Hotspot activated)

Note:

1) The conducted power of UMTS Band IV is measured with RMS detector.

2) Per KDB941225 D01v02, when maximum output of each RF channel with HSDPA/HSUPA active is $\leq \frac{1}{4}$ dB higher than without HSDPA/HSUPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of SAR limit, SAR evaluation for HSDPA/HSUPA is not required.

3) Per KDB941225 D02v02r02, when the maximum average output power of each RF channel with (uplink) HSPA+/DC-HSDPA active is $\leq \frac{1}{4}$ dB higher than that measured without HSPA+/DC-HSDPA using 12.2 kbps RMC, or the maximum reported SAR for 12.2 kbps RMC without HSPA+/DC-HSDPA/ is $\leq 75\%$ of the SAR limit, SAR evaluation for HSPA+/DC-HSDPA is not required.

7.1.5 Conducted power measurements of UMTS Band II

UMTS Band II		Conducted Power (dBm)		
		9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	23.45	23.50	23.42
	64kbps RMC	23.43	23.47	23.43
	144kbps RMC	23.41	23.46	23.44
	384kbps RMC	23.46	23.46	23.43
HSDPA	Subtest 1	23.43	23.48	23.41
	Subtest 2	21.94	21.97	21.97
	Subtest 3	21.36	21.47	21.40
	Subtest 4	21.36	21.45	21.37
HSUPA	Subtest 1	19.36	19.46	19.80
	Subtest 2	19.36	19.46	19.39
	Subtest 3	20.52	20.56	20.55
	Subtest 4	19.41	19.43	19.43
	Subtest 5	21.20	21.18	21.26
DC-HSDPA	Subtest 1	23.31	23.34	23.28
	Subtest 2	21.85	21.91	21.85
	Subtest 3	21.24	21.33	21.29
	Subtest 4	21.22	21.35	21.27

Table 26: Conducted power measurement results of UMTS Band II(Main Antenna, Hotspot disabled)

UMTS Band II		Conducted Power (dBm)		
		9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	23.43	23.46	23.38
	64kbps RMC	23.39	23.47	23.44
	144kbps RMC	23.38	23.45	23.41
	384kbps RMC	23.41	23.43	23.41
HSDPA	Subtest 1	23.40	23.42	23.38
	Subtest 2	21.94	21.96	21.97
	Subtest 3	21.33	21.42	21.39
	Subtest 4	21.31	21.43	21.35
HSUPA	Subtest 1	19.33	19.42	19.76
	Subtest 2	19.33	19.45	19.39
	Subtest 3	20.47	20.55	20.52
	Subtest 4	19.35	19.39	19.40
	Subtest 5	21.17	21.12	21.23
DC-HSDPA	Subtest 1	23.27	23.30	23.27
	Subtest 2	21.84	21.88	21.83
	Subtest 3	21.20	21.29	21.26
	Subtest 4	21.18	21.31	21.25

Table 27: Conducted power measurement results of UMTS Band II(Secondary Antenna, Hotspot disabled)

Note:

- 1) The conducted power of UMTS Band II is measured with RMS detector.
- 2) Per KDB941225 D01v02, when maximum output of each RF channel with HSDPA/HSUPA active is $\leq \frac{1}{4}$ dB higher than without HSDPA/HSUPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of SAR limit, SAR evaluation for HSDPA/HSUPA is not required.
- 3) Per KDB941225 D02v02r02, when the maximum average output power of each RF channel with (uplink) HSPA+/DC-HSDPA active is $\leq \frac{1}{4}$ dB higher than that measured without HSPA+/DC-HSDPA using 12.2 kbps RMC, or the maximum reported SAR for 12.2 kbps RMC without HSPA+/DC-HSDPA/ is $\leq 75\%$ of the SAR limit, SAR evaluation for HSPA+/DC-HSDPA is not required.

UMTS Band II		Conducted Power (dBm)		
		9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	19.20	19.40	19.40
	64kbps RMC	19.24	19.37	19.37
	144kbps RMC	19.19	19.39	19.34
	384kbps RMC	19.17	19.41	19.37
HSDPA	Subtest 1	19.19	19.45	19.37
	Subtest 2	17.77	17.97	17.94
	Subtest 3	17.20	17.41	17.35
	Subtest 4	17.20	17.10	17.32
HSUPA	Subtest 1	15.95	16.37	16.32
	Subtest 2	15.97	16.38	16.33
	Subtest 3	17.50	17.55	17.52
	Subtest 4	16.01	16.46	16.48
	Subtest 5	18.03	18.11	18.12
DC-HSDPA	Subtest 1	19.07	19.31	19.24
	Subtest 2	17.63	17.85	17.80
	Subtest 3	17.08	17.27	17.24
	Subtest 4	17.06	17.02	17.22

Table 28: Conducted power measurement results of UMTS Band II(Main Antenna, Hotspot activated)

UMTS Band II		Conducted Power (dBm)		
		9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	19.18	19.36	19.36
	64kbps RMC	19.20	19.37	19.38
	144kbps RMC	19.16	19.38	19.31
	384kbps RMC	19.12	19.38	19.35
HSDPA	Subtest 1	19.16	19.39	19.34
	Subtest 2	17.72	17.94	17.92
	Subtest 3	17.17	17.36	17.34
	Subtest 4	17.15	17.08	17.30
HSUPA	Subtest 1	15.92	16.33	16.28
	Subtest 2	15.94	16.37	16.33
	Subtest 3	17.47	17.54	17.49
	Subtest 4	15.95	16.42	16.45
	Subtest 5	18.00	18.05	18.09
DC-HSDPA	Subtest 1	19.03	19.27	19.23
	Subtest 2	17.62	17.82	17.78
	Subtest 3	17.04	17.23	17.21
	Subtest 4	17.02	17.01	17.20

Table 29: Conducted power measurement results of UMTS Band II(Secondary Antenna, Hotspot activated)

Note:

- 1) The conducted power of UMTS Band II is measured with RMS detector.
- 2) Per KDB941225 D01v02, when maximum output of each RF channel with HSDPA/HSUPA active is \leq $\frac{1}{4}$ dB higher than without HSDPA/HSUPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is \leq 75% of SAR limit, SAR evaluation for HSDPA/HSUPA is not required.
- 3) Per KDB941225 D02v02r02, when the maximum average output power of each RF channel with (uplink) HSPA+/DC-HSDPA active is \leq $\frac{1}{4}$ dB higher than that measured without HSPA+/DC-HSDPA using 12.2 kbps RMC, or the maximum reported SAR for 12.2 kbps RMC without HSPA+/DC-HSDPA/ is \leq 75% of the SAR limit, SAR evaluation for HSPA+/DC-HSDPA is not required.

7.1.6 Conducted power measurements of LTE Band II

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	22.11	22.11	22.12
		1	3	22.33	22.39	22.27
		1	5	22.24	22.31	22.11
		3	0	22.08	22.40	22.17
		3	2	22.29	22.59	22.18
		3	3	22.27	22.54	22.12
		6	0	21.27	21.72	21.49
	16QAM	1	0	21.41	21.38	21.37
		1	3	21.74	21.88	21.56
		1	5	21.65	21.80	21.40
		3	0	21.42	21.54	21.45
		3	2	21.43	21.74	21.57
		3	3	21.42	21.73	21.42
		6	0	20.31	20.56	20.17
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18615CH	18900CH	19185CH
3MHz	QPSK	1	0	21.65	22.05	22.19
		1	7	22.34	22.58	22.58
		1	14	22.01	22.22	22.07
		8	0	21.31	21.43	21.56
		8	4	21.53	21.69	21.66
		8	7	21.46	21.70	21.67
		15	0	21.39	21.57	21.55
	16QAM	1	0	21.11	21.23	21.46
		1	7	21.81	21.96	21.87
		1	14	21.47	21.67	21.36
		8	0	20.27	20.40	20.21
		8	4	20.33	20.63	20.28
		8	7	20.45	20.67	20.30
		15	0	20.29	20.50	20.20

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18625CH	18900CH	19175CH
5MHz	QPSK	1	0	21.56	21.77	21.96
		1	13	22.42	22.62	22.66
		1	24	21.70	21.71	21.74
		12	0	21.30	21.50	21.68
		12	6	21.58	21.75	21.81
		12	13	21.34	21.43	21.49
		25	0	21.34	21.49	21.52
	16QAM	1	0	20.88	21.09	21.25
		1	13	21.79	21.95	21.96
		1	24	20.99	21.04	21.04
		12	0	20.17	20.45	20.32
		12	6	20.43	20.65	20.42
		12	13	20.22	20.36	20.12
		25	0	20.30	20.47	20.24
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18650CH	18900CH	19150CH
10MHz	QPSK	1	0	21.72	21.79	21.99
		1	25	22.43	22.64	22.63
		1	49	21.20	21.20	21.27
		25	0	21.07	21.15	21.42
		25	13	21.40	21.44	21.61
		25	25	21.04	21.11	21.19
		50	0	21.10	21.00	21.24
	16QAM	1	0	21.13	21.13	21.44
		1	25	21.94	21.97	21.97
		1	49	20.62	20.46	20.76
		25	0	20.13	20.20	20.25
		25	13	20.40	20.47	20.40
		25	25	20.16	20.16	20.13
		50	0	20.09	20.07	20.18

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18675CH	18900CH	19125CH
15MHz	QPSK	1	0	22.07	22.21	22.25
		1	38	22.38	22.61	22.62
		1	74	21.57	21.85	21.72
		36	0	21.38	21.26	21.47
		36	18	21.42	21.41	21.78
		36	39	21.25	21.28	21.38
		75	0	21.20	21.35	21.49
	16QAM	1	0	21.53	21.75	21.63
		1	38	21.92	21.95	21.97
		1	74	21.06	21.25	21.21
		36	0	20.34	20.31	20.30
		36	18	20.41	20.39	20.54
		36	39	20.27	20.25	20.14
		75	0	20.19	20.35	20.10
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18700CH	18900CH	19100CH
20MHz	QPSK	1	0	22.34	22.50	22.75
		1	50	22.39	22.60	22.62
		1	99	22.10	22.23	22.02
		50	0	21.52	21.51	21.75
		50	25	21.44	21.42	21.69
		50	50	21.56	21.49	21.59
		100	0	21.28	21.58	21.78
	16QAM	1	0	21.66	21.82	21.88
		1	50	21.84	21.99	21.90
		1	99	21.35	21.46	21.28
		50	0	20.44	20.50	20.57
		50	25	20.40	20.40	20.50
		50	50	20.55	20.45	20.37
		100	0	20.27	20.54	20.57

Table 30: Conducted power measurement results of LTE Band II(Main Antenna, Hotspot disabled)

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	22.08	22.06	22.09
		1	3	22.31	22.36	22.26
		1	5	22.21	22.30	22.08
		3	0	22.02	22.36	22.15
		3	2	22.26	22.55	22.15
		3	3	22.22	22.52	22.10
		6	0	21.25	21.69	21.47
	16QAM	1	0	21.36	21.35	21.33
		1	3	21.71	21.84	21.53
		1	5	21.61	21.80	21.41
		3	0	21.39	21.53	21.42
		3	2	21.39	21.71	21.54
		3	3	21.39	21.69	21.38
		6	0	20.28	20.53	20.16
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18615CH	18900CH	19185CH
3MHz	QPSK	1	0	21.62	22.01	22.17
		1	7	22.31	22.57	22.55
		1	14	21.95	22.18	22.05
		8	0	21.29	21.38	21.52
		8	4	21.48	21.67	21.64
		8	7	21.44	21.67	21.65
		15	0	21.34	21.54	21.51
	16QAM	1	0	21.08	21.19	21.43
		1	7	21.77	21.96	21.88
		1	14	21.44	21.66	21.33
		8	0	20.21	20.36	20.19
		8	4	20.30	20.59	20.25
		8	7	20.40	20.65	20.28
		15	0	20.27	20.47	20.18

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18625CH	18900CH	19175CH
5MHz	QPSK	1	0	21.52	21.75	21.93
		1	13	22.38	22.58	22.63
		1	24	21.66	21.67	21.70
		12	0	21.27	21.48	21.66
		12	6	21.54	21.71	21.79
		12	13	21.30	21.41	21.46
		25	0	21.30	21.44	21.49
	16QAM	1	0	20.84	21.07	21.24
		1	13	21.74	21.93	21.94
		1	24	20.97	21.01	21.02
		12	0	20.12	20.42	20.28
		12	6	20.40	20.61	20.39
		12	13	20.20	20.35	20.11
		25	0	20.25	20.44	20.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18650CH	18900CH	19150CH
10MHz	QPSK	1	0	21.69	21.76	21.97
		1	25	22.39	22.61	22.61
		1	49	21.17	21.18	21.23
		25	0	21.03	21.10	21.38
		25	13	21.37	21.40	21.58
		25	25	20.99	21.10	21.19
		50	0	21.07	20.97	21.23
	16QAM	1	0	21.08	21.10	21.41
		1	25	21.92	21.95	21.97
		1	49	20.59	20.45	20.76
		25	0	20.08	20.17	20.24
		25	13	20.36	20.43	20.39
		25	25	20.11	20.14	20.09
		50	0	20.07	20.03	20.14

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18675CH	18900CH	19125CH
15MHz	QPSK	1	0	22.05	22.18	22.23
		1	38	22.33	22.58	22.58
		1	74	21.54	21.81	21.69
		36	0	21.34	21.23	21.45
		36	18	21.38	21.39	21.77
		36	39	21.21	21.24	21.37
		75	0	21.15	21.32	21.46
	16QAM	1	0	21.51	21.69	21.59
		1	38	21.89	21.95	21.97
		1	74	21.01	21.22	21.20
		36	0	20.30	20.27	20.29
		36	18	20.37	20.37	20.54
		36	39	20.23	20.23	20.11
		75	0	20.15	20.30	20.07
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18700CH	18900CH	19100CH
20MHz	QPSK	1	0	22.29	22.47	22.71
		1	50	22.36	22.56	22.59
		1	99	22.06	22.20	22.00
		50	0	21.48	21.49	21.74
		50	25	21.40	21.38	21.68
		50	50	21.51	21.46	21.56
		100	0	21.26	21.52	21.74
	16QAM	1	0	21.63	21.81	21.88
		1	50	21.79	21.96	21.89
		1	99	21.31	21.42	21.27
		50	0	20.40	20.46	20.56
		50	25	20.35	20.37	20.47
		50	50	20.53	20.39	20.33
		100	0	20.22	20.51	20.56

Table 31: Conducted power measurement results of LTE Band II(Secondary Antenna, Hotspot disabled)

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	19.25	19.27	19.64
		1	3	19.41	19.79	19.75
		1	5	19.29	19.73	19.68
		3	0	19.13	19.58	19.63
		3	2	19.36	19.71	19.68
		3	3	19.32	19.69	19.75
		6	0	19.29	19.64	19.62
	16QAM	1	0	19.38	19.52	19.62
		1	3	19.72	19.79	19.76
		1	5	19.59	19.73	19.68
		3	0	19.39	19.62	19.74
		3	2	19.67	19.75	19.73
		3	3	19.59	19.75	19.77
		6	0	19.61	19.73	19.66
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18615CH	18900CH	19185CH
3MHz	QPSK	1	0	18.70	19.23	19.20
		1	7	19.54	19.76	19.95
		1	14	19.44	19.57	19.47
		8	0	19.35	19.42	19.67
		8	4	19.53	19.65	19.76
		8	7	19.63	19.69	19.64
		15	0	19.41	19.54	19.64
	16QAM	1	0	18.89	19.32	19.14
		1	7	20.01	19.82	19.83
		1	14	19.67	19.64	19.57
		8	0	19.29	19.34	19.63
		8	4	19.45	19.57	19.73
		8	7	19.57	19.63	19.62
		15	0	19.33	19.45	19.57

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18625CH	18900CH	19175CH
5MHz	QPSK	1	0	19.51	19.70	19.54
		1	13	20.43	20.41	20.37
		1	24	19.71	19.67	19.67
		12	0	20.00	20.16	19.99
		12	6	20.36	20.35	20.44
		12	13	20.10	20.16	20.18
		25	0	19.97	20.09	20.28
	16QAM	1	0	19.37	19.74	19.94
		1	13	20.41	20.45	20.47
		1	24	19.62	19.71	20.00
		12	0	19.99	20.17	20.00
		12	6	20.38	20.37	20.44
		12	13	20.12	20.18	20.19
		25	0	19.90	20.04	20.27
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18650CH	18900CH	19150CH
10MHz	QPSK	1	0	19.71	19.71	19.67
		1	25	20.45	20.46	20.38
		1	49	19.15	19.36	19.22
		25	0	19.75	19.89	19.80
		25	13	20.03	20.08	19.99
		25	25	19.72	19.92	20.07
		50	0	19.66	19.83	19.99
	16QAM	1	0	19.97	19.98	19.78
		1	25	20.42	20.41	20.45
		1	49	19.41	19.61	19.30
		25	0	19.72	19.87	19.78
		25	13	19.99	20.06	19.96
		25	25	19.69	19.90	20.04
		50	0	19.61	19.80	19.94

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18675CH	18900CH	19125CH
15MHz	QPSK	1	0	20.08	20.07	20.16
		1	38	20.14	20.47	20.43
		1	74	19.48	20.00	19.82
		36	0	19.88	20.00	19.90
		36	18	20.14	20.24	20.16
		36	39	19.92	20.27	20.21
		75	0	19.96	20.12	20.25
	16QAM	1	0	20.43	20.33	20.41
		1	38	20.45	20.48	20.42
		1	74	19.72	20.25	19.98
		36	0	19.96	19.92	19.86
		36	18	20.08	20.17	20.11
		36	39	19.85	20.19	20.15
		75	0	19.89	20.05	20.17
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
20MHz	QPSK	1	0	19.63	19.60	19.92
		1	50	19.69	19.87	19.67
		1	99	19.21	19.71	19.50
		50	0	19.41	19.67	19.71
		50	25	19.35	19.58	19.50
		50	50	19.42	19.62	19.63
		100	0	19.44	19.71	19.76
	16QAM	1	0	20.12	19.92	20.38
		1	50	20.07	20.13	20.14
		1	99	19.61	20.04	19.94
		50	0	19.58	19.42	19.64
		50	25	19.31	19.54	19.43
		50	50	19.39	19.77	19.75
		100	0	19.39	19.63	19.68
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
20MHz	QPSK	1	0	19.63	19.60	19.92
		1	50	19.69	19.87	19.67
		1	99	19.21	19.71	19.50
		50	0	19.41	19.67	19.71
		50	25	19.35	19.58	19.50
		50	50	19.42	19.62	19.63
		100	0	19.44	19.71	19.76
	16QAM	1	0	20.12	19.92	20.38
		1	50	20.07	20.13	20.14
		1	99	19.61	20.04	19.94
		50	0	19.58	19.42	19.64
		50	25	19.31	19.54	19.43
		50	50	19.39	19.77	19.75
		100	0	19.39	19.63	19.68

Table 32: Conducted power measurement results of LTE Band II(Main Antenna, Hotspot activated)

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	19.21	19.22	19.58
		1	3	19.36	19.75	19.69
		1	5	19.25	19.68	19.64
		3	0	19.08	19.55	19.59
		3	2	19.31	19.68	19.64
		3	3	19.27	19.63	19.68
		6	0	19.24	19.58	19.58
	16QAM	1	0	19.35	19.48	19.57
		1	3	19.67	19.76	19.72
		1	5	19.55	19.68	19.62
		3	0	19.34	19.58	19.68
		3	2	19.63	19.70	19.69
		3	3	19.54	19.72	19.73
		6	0	19.56	19.67	19.59
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18615CH	18900CH	19185CH
3MHz	QPSK	1	0	18.66	19.18	19.16
		1	7	19.49	19.73	19.91
		1	14	19.39	19.54	19.43
		8	0	19.30	19.36	19.60
		8	4	19.48	19.59	19.72
		8	7	19.60	19.65	19.59
		15	0	19.36	19.51	19.60
	16QAM	1	0	18.85	19.27	19.08
		1	7	19.98	19.78	19.78
		1	14	19.62	19.61	19.53
		8	0	19.25	19.29	19.57
		8	4	19.40	19.53	19.67
		8	7	19.53	19.58	19.58
		15	0	19.30	19.41	19.52

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18625CH	18900CH	19175CH
5MHz	QPSK	1	0	19.46	19.67	19.50
		1	13	20.48	20.48	20.33
		1	24	19.66	19.61	19.60
		12	0	19.95	20.10	19.95
		12	6	20.33	20.31	20.39
		12	13	20.05	20.13	20.14
		25	0	19.93	20.04	20.22
	16QAM	1	0	19.34	19.70	19.89
		1	13	20.36	20.42	20.43
		1	24	19.58	19.66	19.94
		12	0	19.94	20.14	19.96
		12	6	20.34	20.32	20.38
		12	13	20.09	20.14	20.14
		25	0	19.85	20.01	20.23
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18650CH	18900CH	19150CH
10MHz	QPSK	1	0	19.66	19.68	19.63
		1	25	20.40	20.40	20.31
		1	49	19.10	19.30	19.18
		25	0	19.72	19.85	19.75
		25	13	19.98	20.05	19.95
		25	25	19.68	19.87	20.01
		50	0	19.63	19.79	19.94
	16QAM	1	0	19.92	19.95	19.74
		1	25	20.38	20.36	20.39
		1	49	19.36	19.58	19.26
		25	0	19.69	19.83	19.73
		25	13	19.94	20.03	19.92
		25	25	19.65	19.85	19.98
		50	0	19.58	19.76	19.89

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18675CH	18900CH	19125CH
15MHz	QPSK	1	0	20.03	20.01	20.09
		1	38	20.09	20.41	20.39
		1	74	19.45	19.96	19.77
		36	0	19.83	19.97	19.86
		36	18	20.10	20.19	20.10
		36	39	19.89	20.23	20.16
		75	0	19.91	20.09	20.21
	16QAM	1	0	20.39	20.28	20.35
		1	38	20.40	20.45	20.38
		1	74	19.69	20.21	19.93
		36	0	19.92	19.87	19.80
		36	18	20.05	20.13	20.06
		36	39	19.80	20.16	20.11
		75	0	19.85	20.00	20.11
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18700CH	18900CH	19100CH
20MHz	QPSK	1	0	19.58	19.54	19.88
		1	50	19.66	19.83	19.62
		1	99	19.16	19.68	19.46
		50	0	19.37	19.62	19.65
		50	25	19.32	19.54	19.45
		50	50	19.38	19.59	19.59
		100	0	19.40	19.66	19.70
	16QAM	1	0	20.07	19.89	20.34
		1	50	20.04	20.09	20.09
		1	99	19.57	19.99	19.88
		50	0	19.55	19.38	19.59
		50	25	19.26	19.51	19.39
		50	50	19.36	19.73	19.70
		100	0	19.34	19.60	19.64

Table 33: Conducted power measurement results of LTE Band II(Secondary Antenna, Hotspot activated)

7.1.7 Conducted power measurements of LTE Band IV

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	22.65	23.01	22.81
		1	3	22.83	23.31	23.00
		1	5	22.69	23.19	22.87
		3	0	22.65	23.12	22.82
		3	2	22.73	23.20	22.91
		3	3	22.71	23.18	22.88
		6	0	21.85	22.36	22.08
	16QAM	1	0	21.90	22.36	22.04
		1	3	22.07	22.61	22.18
		1	5	21.97	22.47	22.07
		3	0	21.86	22.35	22.17
		3	2	21.89	22.45	22.25
		3	3	21.86	22.55	22.22
		6	0	20.80	21.27	21.07
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19965CH	20175	20385CH
3MHz	QPSK	1	0	22.22	22.74	22.72
		1	7	22.73	23.21	23.23
		1	14	22.51	22.96	22.89
		8	0	21.64	22.24	21.92
		8	4	21.82	22.42	22.15
		8	7	21.75	22.42	22.11
		15	0	21.70	22.33	22.06
	16QAM	1	0	21.61	21.94	21.80
		1	7	22.20	22.49	22.30
		1	14	21.79	22.22	21.95
		8	0	20.71	21.18	20.84
		8	4	20.87	21.37	21.12
		8	7	20.82	21.37	21.07
		15	0	20.66	21.21	20.98

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19975CH	20175H	20375CH
5MHz	QPSK	1	0	22.10	22.49	22.37
		1	13	22.76	23.28	22.89
		1	24	22.11	22.62	22.21
		12	0	21.65	22.13	21.99
		12	6	21.90	22.43	22.15
		12	13	21.64	22.25	21.94
		25	0	21.78	22.21	22.01
	16QAM	1	0	21.52	21.97	21.99
		1	13	22.20	22.75	22.53
		1	24	21.51	22.11	21.81
		12	0	20.71	21.16	21.00
		12	6	20.92	21.43	21.14
		12	13	20.65	21.25	20.94
		25	0	20.78	21.24	21.06
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20000H	20175CH	20350CH
10MHz	QPSK	1	0	22.18	22.45	22.58
		1	25	22.89	23.37	23.19
		1	49	22.17	22.10	22.09
		25	0	21.57	21.93	22.01
		25	13	21.86	22.23	22.10
		25	25	21.52	22.03	21.79
		50	0	21.46	21.97	21.96
	16QAM	1	0	21.59	21.87	21.99
		1	25	22.43	22.86	22.72
		1	49	21.08	21.46	21.13
		25	0	20.56	20.91	20.99
		25	13	20.86	21.22	21.10
		25	25	20.52	21.03	20.82
		50	0	20.40	20.92	20.94

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20025CH	20175CH	20325CH
15MHz	QPSK	1	0	22.60	22.89	23.03
		1	38	22.95	23.36	23.18
		1	74	22.38	22.48	22.22
		36	0	21.77	22.09	22.20
		36	18	22.06	22.36	22.38
		36	39	21.86	22.13	22.06
		75	0	21.87	22.18	22.14
	16QAM	1	0	22.00	22.40	22.42
		1	38	22.44	22.88	22.56
		1	74	21.83	21.97	21.61
		36	0	20.70	21.03	21.12
		36	18	20.98	21.25	21.27
		36	39	20.78	21.05	20.98
		75	0	20.79	21.10	21.08
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20050CH	20175CH	20300CH
20MHz	QPSK	1	0	22.85	23.08	23.26
		1	50	22.97	23.30	23.24
		1	99	22.77	22.80	22.49
		50	0	21.93	22.16	22.27
		50	25	22.05	22.29	22.24
		50	50	22.09	22.28	22.25
		100	0	21.91	22.31	22.27
	16QAM	1	0	22.11	22.38	22.59
		1	50	22.39	22.68	22.62
		1	99	22.07	22.14	21.82
		50	0	20.97	21.22	21.31
		50	25	21.06	21.32	21.26
		50	50	21.11	21.34	21.33
		100	0	20.95	21.29	21.28

Table 34: Conducted power measurement results of LTE Band IV(Main Antenna, Hotspot disabled)

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	22.62	22.96	22.78
		1	3	22.81	23.28	22.99
		1	5	22.66	23.18	22.84
		3	0	22.59	23.08	22.80
		3	2	22.70	23.16	22.88
		3	3	22.66	23.16	22.86
		6	0	21.83	22.33	22.06
	16QAM	1	0	21.85	22.33	22.00
		1	3	22.04	22.57	22.15
		1	5	21.93	22.47	22.08
		3	0	21.83	22.34	22.14
		3	2	21.85	22.42	22.22
		3	3	21.83	22.51	22.18
		6	0	20.77	21.24	21.06
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19965CH	20175CH	20385CH
3MHz	QPSK	1	0	22.19	22.70	22.70
		1	7	22.70	23.20	23.20
		1	14	22.45	22.92	22.87
		8	0	21.62	22.19	21.88
		8	4	21.77	22.40	22.13
		8	7	21.73	22.39	22.09
		15	0	21.65	22.30	22.02
	16QAM	1	0	21.58	21.90	21.77
		1	7	22.16	22.49	22.31
		1	14	21.76	22.21	21.92
		8	0	20.65	21.14	20.82
		8	4	20.84	21.33	21.09
		8	7	20.77	21.35	21.05
		15	0	20.64	21.18	20.96

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19975CH	20175CH	20375CH
5MHz	QPSK	1	0	22.06	22.47	22.34
		1	13	22.72	23.24	22.86
		1	24	22.07	22.58	22.17
		12	0	21.62	22.11	21.97
		12	6	21.86	22.39	22.13
		12	13	21.60	22.23	21.91
		25	0	21.74	22.16	21.98
	16QAM	1	0	21.48	21.95	21.98
		1	13	22.15	22.73	22.51
		1	24	21.49	22.08	21.79
		12	0	20.66	21.13	20.96
		12	6	20.89	21.39	21.11
		12	13	20.63	21.24	20.93
		25	0	20.73	21.21	21.02
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20000CH	20175CH	20350CH
10MHz	QPSK	1	0	22.15	22.42	22.56
		1	25	22.85	23.34	23.17
		1	49	22.14	22.08	22.05
		25	0	21.53	21.88	21.97
		25	13	21.83	22.19	22.07
		25	25	21.47	22.02	21.79
		50	0	21.43	21.94	21.95
	16QAM	1	0	21.54	21.84	21.96
		1	25	22.41	22.80	22.68
		1	49	21.05	21.45	21.13
		25	0	20.51	20.88	20.98
		25	13	20.82	21.18	21.09
		25	25	20.47	21.01	20.78
		50	0	20.38	20.88	20.90

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20025CH	20175CH	20325CH
15MHz	QPSK	1	0	22.58	22.86	23.01
		1	38	22.90	23.33	23.14
		1	74	22.35	22.44	22.19
		36	0	21.73	22.06	22.18
		36	18	22.02	22.34	22.37
		36	39	21.82	22.09	22.05
		75	0	21.82	22.15	22.11
	16QAM	1	0	21.98	22.34	22.38
		1	38	22.41	22.87	22.56
		1	74	21.78	21.94	21.60
		36	0	20.66	20.99	21.11
		36	18	20.94	21.23	21.27
		36	39	20.74	21.03	20.95
		75	0	20.75	21.05	21.05
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20050CH	20175CH	20300CH
20MHz	QPSK	1	0	22.80	23.05	23.22
		1	50	22.94	23.26	23.21
		1	99	22.73	22.77	22.47
		50	0	21.89	22.14	22.26
		50	25	22.01	22.26	22.23
		50	50	22.04	22.25	22.23
		100	0	21.89	22.25	22.23
	16QAM	1	0	22.08	22.37	22.59
		1	50	22.34	22.65	22.61
		1	99	22.03	22.10	21.81
		50	0	20.93	21.18	21.30
		50	25	21.01	21.29	21.23
		50	50	21.09	21.28	21.29
		100	0	20.90	21.26	21.27

Table 35: Conducted power measurement results of LTE Band IV(Secondary Antenna, Hotspot disabled)



Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	18.37	18.05	18.98
		1	3	18.57	18.34	18.58
		1	5	18.40	18.23	18.47
		3	0	18.44	18.16	18.37
		3	2	18.52	18.31	18.46
		3	3	18.47	18.26	18.43
		6	0	18.43	18.22	17.40
	16QAM	1	0	18.39	18.19	17.76
		1	3	18.59	18.52	17.58
		1	5	18.61	18.37	17.48
		3	0	18.42	18.23	17.37
		3	2	18.50	18.34	17.45
		3	3	18.43	18.34	17.42
		6	0	17.95	17.96	17.39
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19965CH	20175CH	20385CH
3MHz	QPSK	1	0	18.05	18.64	18.63
		1	7	18.56	18.37	18.30
		1	14	18.20	18.21	18.35
		8	0	18.24	18.00	17.85
		8	4	18.37	18.23	18.08
		8	7	18.34	18.26	17.38
		15	0	18.27	18.12	17.98
	16QAM	1	0	18.10	17.80	17.66
		1	7	18.65	18.49	18.21
		1	14	18.28	18.29	17.28
		8	0	17.18	17.06	17.83
		8	4	17.31	17.19	17.07
		8	7	17.28	17.22	17.36
		15	0	17.17	17.01	17.86

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19975CH	20175CH	20375CH
5MHz	QPSK	1	0	18.49	18.05	18.07
		1	13	18.78	18.80	18.79
		1	24	18.32	18.43	18.45
		12	0	18.81	18.53	18.40
		12	6	18.71	18.87	18.69
		12	13	18.53	18.64	18.51
		25	0	18.76	18.63	18.58
	16QAM	1	0	18.37	18.08	18.39
		1	13	19.00	18.97	18.98
		1	24	18.17	18.42	17.79
		12	0	17.79	17.53	17.35
		12	6	17.98	17.85	17.61
		12	13	17.72	17.73	17.43
		25	0	17.68	17.56	17.93
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20000CH	20175CH	20350CH
10MHz	QPSK	1	0	18.52	18.04	18.32
		1	25	18.73	18.84	18.89
		1	49	18.50	18.08	18.02
		25	0	18.56	18.26	18.42
		25	13	18.51	18.65	18.50
		25	25	18.19	18.60	18.25
		50	0	18.29	18.42	18.33
	16QAM	1	0	18.79	18.35	18.28
		1	25	18.95	18.22	18.85
		1	49	17.79	18.34	17.09
		25	0	17.15	17.63	17.43
		25	13	17.31	17.62	17.41
		25	25	17.42	17.66	17.20
		50	0	17.13	17.54	17.48

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20025CH	20175CH	20325CH
15MHz	QPSK	1	0	18.92	18.24	18.88
		1	38	18.71	18.98	18.73
		1	74	18.76	18.56	18.60
		36	0	18.49	18.26	18.56
		36	18	18.41	18.76	18.58
		36	39	18.02	18.62	18.53
		75	0	18.19	18.59	18.65
	16QAM	1	0	18.21	18.60	18.45
		1	38	18.69	18.69	18.65
		1	74	18.04	18.87	17.76
		36	0	17.57	17.32	17.82
		36	18	17.39	17.83	17.78
		36	39	17.01	17.86	17.5
		75	0	17.23	17.59	17.69
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20050CH	20175CH	20300CH
20MHz	QPSK	1	0	18.44	18.05	18.47
		1	50	18.45	18.51	18.33
		1	99	18.36	18.26	18.30
		50	0	18.07	17.82	18.26
		50	25	18.01	18.32	18.13
		50	50	18.08	18.23	18.15
		100	0	18.40	18.13	18.37
	16QAM	1	0	18.47	18.41	18.86
		1	50	18.36	18.74	18.51
		1	99	18.23	18.65	18.01
		50	0	17.95	17.75	17.91
		50	25	17.66	17.96	17.97
		50	50	17.65	17.94	17.10
		100	0	17.87	17.91	17.41

Table 36: Conducted power measurement results of LTE Band IV(Main Antenna, Hotspot activated)

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	18.33	18.00	18.92
		1	3	18.52	18.30	18.52
		1	5	18.36	18.18	18.43
		3	0	18.39	18.13	18.33
		3	2	18.47	18.28	18.42
		3	3	18.42	18.20	18.36
		6	0	18.38	18.16	17.36
	16QAM	1	0	18.36	18.15	17.71
		1	3	18.54	18.49	17.54
		1	5	18.57	18.32	17.42
		3	0	18.37	18.19	17.31
		3	2	18.46	18.29	17.41
		3	3	18.38	18.31	17.38
		6	0	17.90	17.90	17.32
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19965CH	20175CH	20385CH
3MHz	QPSK	1	0	18.01	18.59	18.59
		1	7	18.51	18.34	18.26
		1	14	18.15	18.18	18.31
		8	0	18.19	17.94	17.78
		8	4	18.32	18.17	18.04
		8	7	18.31	18.22	17.33
		15	0	18.22	18.09	17.94
	16QAM	1	0	18.06	17.75	17.60
		1	7	18.62	18.45	18.16
		1	14	18.23	18.26	17.24
		8	0	17.14	17.01	17.77
		8	4	17.26	17.15	17.01
		8	7	17.24	17.17	17.32
		15	0	17.14	16.97	17.81

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19975CH	20175CH	20375CH
5MHz	QPSK	1	0	18.44	18.02	18.03
		1	13	18.73	18.77	18.75
		1	24	18.27	18.37	18.38
		12	0	18.76	18.47	18.36
		12	6	18.68	18.83	18.64
		12	13	18.48	18.61	18.47
		25	0	18.72	18.58	18.52
	16QAM	1	0	18.34	18.04	18.34
		1	13	18.95	18.94	18.94
		1	24	18.13	18.37	17.73
		12	0	17.74	17.50	17.31
		12	6	17.94	17.80	17.55
		12	13	17.69	17.69	17.38
		25	0	17.63	17.53	17.89
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20000CH	20175CH	20350CH
10MHz	QPSK	1	0	18.47	18.01	18.28
		1	25	18.68	18.78	18.82
		1	49	18.45	18.02	17.98
		25	0	18.53	18.22	18.37
		25	13	18.46	18.62	18.46
		25	25	18.15	18.55	18.19
		50	0	18.26	18.38	18.28
	16QAM	1	0	18.74	18.32	18.24
		1	25	18.91	18.17	18.79
		1	49	17.74	18.31	17.05
		25	0	17.12	17.59	17.38
		25	13	17.26	17.59	17.37
		25	25	17.38	17.61	17.14
		50	0	17.10	17.50	17.43

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20025CH	20175CH	20325CH
15MHz	QPSK	1	0	18.87	18.18	18.81
		1	38	18.66	18.92	18.69
		1	74	18.73	18.52	18.55
		36	0	18.44	18.23	18.52
		36	18	18.37	18.71	18.52
		36	39	17.99	18.58	18.48
		75	0	18.14	18.56	18.61
	16QAM	1	0	18.17	18.55	18.39
		1	38	18.64	18.66	18.61
		1	74	18.01	18.83	17.71
		36	0	17.53	17.27	17.76
		36	18	17.36	17.79	17.73
		36	39	16.96	17.83	17.46
		75	0	17.19	17.54	17.63
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20050CH	20175CH	20300CH
20MHz	QPSK	1	0	18.39	17.99	18.43
		1	50	18.42	18.47	18.28
		1	99	18.31	18.23	18.26
		50	0	18.03	17.77	18.20
		50	25	17.98	18.28	18.08
		50	50	18.04	18.20	18.11
		100	0	18.36	18.08	18.31
	16QAM	1	0	18.42	18.38	18.82
		1	50	18.33	18.70	18.46
		1	99	18.19	18.60	17.95
		50	0	17.92	17.71	17.86
		50	25	17.61	17.93	17.93
		50	50	17.62	17.90	17.05
		100	0	17.82	17.88	17.37

Table 37: Conducted power measurement results of LTE Band IV(Secondary Antenna, Hotspot activated)

7.1.8 Conducted power measurements of LTE Band V

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	22.21	22.62	22.75
		1	3	22.55	22.62	22.94
		1	5	22.41	22.53	22.71
		3	0	22.33	22.61	22.88
		3	2	22.47	22.61	22.88
		3	3	22.46	22.55	22.74
		6	0	21.56	21.57	21.89
	16QAM	1	0	21.61	21.85	22.31
		1	3	21.79	21.92	21.97
		1	5	21.66	21.78	21.72
		3	0	21.58	21.56	21.94
		3	2	21.60	21.56	22.13
		3	3	21.57	21.54	22.02
		6	0	20.38	20.62	21.17
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20415CH	20525CH	20635CH
3MHz	QPSK	1	0	22.10	22.45	22.76
		1	7	22.66	22.63	22.99
		1	14	22.60	22.52	22.50
		8	0	21.28	21.53	21.97
		8	4	21.64	21.55	22.08
		8	7	21.67	21.62	21.91
		15	0	21.54	21.50	21.98
	16QAM	1	0	21.58	21.54	21.77
		1	7	22.02	21.71	22.01
		1	14	21.58	21.84	21.56
		8	0	20.41	20.61	20.87
		8	4	20.74	20.64	20.99
		8	7	20.71	20.68	20.85
		15	0	20.56	20.55	20.89

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20425CH	20525CH	20625CH
5MHz	QPSK	1	0	22.13	22.60	23.03
		1	13	23.17	22.95	23.50
		1	24	22.78	22.41	22.50
		12	0	21.76	21.91	22.39
		12	6	22.07	21.99	22.53
		12	13	22.05	21.86	22.20
		25	0	21.92	21.95	22.36
	16QAM	1	0	21.56	21.90	22.22
		1	13	22.54	22.23	22.71
		1	24	22.14	21.71	21.74
		12	0	20.79	20.96	21.27
		12	6	21.05	21.04	21.42
		12	13	21.01	20.94	21.12
		25	0	20.99	20.99	21.25
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20450CH	20525CH	20600CH
10MHz	QPSK	1	0	22.45	22.97	22.85
		1	25	23.85	23.39	23.99
		1	49	22.55	22.33	22.36
		25	0	22.15	22.26	22.36
		25	13	22.52	22.32	22.75
		25	25	22.35	22.00	22.51
		50	0	22.29	22.11	22.33
	16QAM	1	0	21.75	22.30	22.08
		1	25	23.05	22.70	23.32
		1	49	21.84	21.65	21.63
		25	0	21.17	21.29	21.36
		25	13	21.48	21.39	21.68
		25	25	21.33	21.11	21.44
		50	0	20.83	21.15	21.25

Table 38: Conducted power measurement results of LTE Band V(Main Antenna)

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	22.18	22.57	22.72
		1	3	22.53	22.59	22.93
		1	5	22.38	22.52	22.68
		3	0	22.27	22.57	22.86
		3	2	22.44	22.57	22.85
		3	3	22.41	22.53	22.72
		6	0	21.53	21.54	21.87
	16QAM	1	0	21.57	21.82	22.27
		1	3	21.76	21.88	21.94
		1	5	21.62	21.78	21.73
		3	0	21.55	21.55	21.91
		3	2	21.57	21.53	22.10
		3	3	21.54	21.51	21.98
		6	0	20.35	20.59	21.16
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20415CH	20525CH	20635CH
3MHz	QPSK	1	0	22.07	22.41	22.74
		1	7	22.63	22.62	22.96
		1	14	22.54	22.48	22.48
		8	0	21.26	21.48	21.93
		8	4	21.59	21.53	22.06
		8	7	21.65	21.59	21.89
		15	0	21.49	21.47	21.94
	16QAM	1	0	21.52	21.51	21.74
		1	7	21.98	21.71	22.02
		1	14	21.55	21.83	21.53
		8	0	20.35	20.57	20.85
		8	4	20.71	20.60	20.96
		8	7	20.66	20.66	20.83
		15	0	20.54	20.52	20.87

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20425CH	20525CH	20625CH
5MHz	QPSK	1	0	22.09	22.58	23.00
		1	13	23.13	22.91	23.47
		1	24	22.74	22.37	22.46
		12	0	21.73	21.89	22.37
		12	6	22.03	21.95	22.51
		12	13	22.01	21.84	22.17
		25	0	21.88	21.90	22.33
	16QAM	1	0	21.53	21.88	22.21
		1	13	22.49	22.21	22.69
		1	24	22.12	21.68	21.72
		12	0	20.74	20.93	21.23
		12	6	21.02	21.00	21.39
		12	13	20.99	20.93	21.11
		25	0	20.94	20.96	21.21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20450CH	20525CH	20600CH
10MHz	QPSK	1	0	22.42	22.94	22.83
		1	25	23.81	23.36	23.98
		1	49	22.52	22.31	22.32
		25	0	22.11	22.21	22.32
		25	13	22.49	22.28	22.72
		25	25	22.30	21.99	22.51
		50	0	22.26	22.08	22.32
	16QAM	1	0	21.70	22.27	22.05
		1	25	23.03	22.64	23.28
		1	49	21.81	21.64	21.63
		25	0	21.12	21.26	21.35
		25	13	21.44	21.35	21.67
		25	25	21.28	21.09	21.40
		50	0	20.76	21.08	21.17

Table 39: Conducted power measurement results of LTE Band V(Secondary Antenna)

7.1.9 Conducted power measurements of LTE Band VII

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20775CH	21100CH	21425CH
5MHz	QPSK	1	0	20.90	21.62	21.40
		1	13	21.60	22.34	21.99
		1	24	20.98	21.54	21.28
		12	0	20.86	21.71	21.29
		12	6	21.08	21.88	21.53
		12	13	20.92	21.73	21.29
		25	0	20.84	21.71	21.31
	16QAM	1	0	20.63	21.38	21.22
		1	13	21.34	21.97	21.75
		1	24	20.72	21.32	21.07
		12	0	20.05	20.71	20.59
		12	6	20.23	20.92	20.84
		12	13	20.06	20.77	20.61
		25	0	20.09	20.87	20.64
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20800CH	21100CH	21400CH
10MHz	QPSK	1	0	20.80	21.62	21.37
		1	25	21.79	22.31	22.09
		1	49	20.66	21.02	20.68
		25	0	20.67	21.45	21.28
		25	13	21.06	21.74	21.39
		25	25	20.82	21.37	21.09
		50	0	20.69	21.47	21.19
	16QAM	1	0	20.61	21.38	21.12
		1	25	21.39	22.04	21.80
		1	49	20.60	20.78	20.60
		25	0	20.08	20.64	20.67
		25	13	20.44	20.95	20.77
		25	25	20.23	20.59	20.50
		50	0	20.04	20.64	20.57

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20825CH	21100CH	21375CH
15MHz	QPSK	1	0	21.13	21.98	21.92
		1	38	21.65	22.44	22.18
		1	74	21.14	21.48	21.26
		36	0	20.70	21.65	21.67
		36	18	21.20	21.74	21.67
		36	39	21.17	21.57	21.46
		75	0	21.09	21.63	21.53
	16QAM	1	0	20.78	21.63	21.72
		1	38	21.42	21.94	21.93
		1	74	20.81	21.06	20.99
		36	0	20.10	20.75	20.82
		36	18	20.33	20.08	20.79
		36	39	20.26	20.68	20.60
		75	0	20.18	20.73	20.66
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20850CH	21100CH	21350CH
20MHz	QPSK	1	0	21.28	22.14	21.92
		1	50	21.73	22.46	22.10
		1	99	21.33	21.73	21.47
		50	0	20.93	21.87	21.65
		50	25	21.07	21.82	21.56
		50	50	21.14	21.66	21.60
		100	0	21.22	21.70	21.57
	16QAM	1	0	21.05	21.82	21.72
		1	50	21.52	22.00	21.90
		1	99	21.24	21.27	21.12
		50	0	20.32	20.96	20.82
		50	25	20.50	20.93	20.72
		50	50	20.55	20.79	20.77
		100	0	20.46	20.83	20.77

Table 40: Conducted power measurement results of LTE Band VII(Main Antenna, Hotspot disabled)

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20775CH	21100CH	21425CH
5MHz	QPSK	1	0	20.87	21.57	21.37
		1	13	21.58	22.31	21.98
		1	24	20.95	21.53	21.25
		12	0	20.80	21.67	21.27
		12	6	21.05	21.84	21.50
		12	13	20.87	21.71	21.27
		25	0	20.82	21.68	21.29
	16QAM	1	0	20.58	21.35	21.18
		1	13	21.31	21.93	21.72
		1	24	20.68	21.32	21.08
		12	0	20.02	20.70	20.56
		12	6	20.19	20.89	20.81
		12	13	20.03	20.73	20.57
		25	0	20.06	20.84	20.63
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20800CH	21100CH	21400CH
10MHz	QPSK	1	0	20.77	21.58	21.35
		1	25	21.76	22.30	22.06
		1	49	20.60	20.98	20.66
		25	0	20.65	21.40	21.24
		25	13	21.01	21.72	21.37
		25	25	20.80	21.34	21.07
		50	0	20.64	21.44	21.15
	16QAM	1	0	20.58	21.34	21.09
		1	25	21.35	22.04	21.81
		1	49	20.57	20.77	20.57
		25	0	20.04	20.60	20.65
		25	13	20.41	20.91	20.74
		25	25	20.18	20.57	20.48
		50	0	20.02	20.61	20.55

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20825CH	21100CH	21375CH
15MHz	QPSK	1	0	21.09	21.96	21.89
		1	38	21.61	22.40	22.15
		1	74	21.10	21.44	21.22
		36	0	20.67	21.63	21.65
		36	18	21.16	21.70	21.65
		36	39	21.13	21.55	21.43
		75	0	21.05	21.58	21.50
	16QAM	1	0	20.74	21.61	21.71
		1	38	21.37	21.92	21.91
		1	74	20.79	21.03	20.97
		36	0	20.05	20.72	20.78
		36	18	20.30	20.03	20.76
		36	39	20.24	20.67	20.59
		75	0	20.13	20.70	20.62
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20850CH	21100CH	21350CH
20MHz	QPSK	1	0	21.25	22.11	21.90
		1	50	21.69	22.43	22.08
		1	99	21.30	21.71	21.43
		50	0	20.89	21.82	21.61
		50	25	21.04	21.78	21.53
		50	50	21.09	21.65	21.60
		100	0	21.19	21.67	21.56
	16QAM	1	0	21.00	21.79	21.69
		1	50	21.50	21.94	21.86
		1	99	21.21	21.26	21.12
		50	0	20.27	20.93	20.81
		50	25	20.46	20.89	20.71
		50	50	20.50	20.77	20.73
		100	0	20.44	20.79	20.73

Table 41: Conducted power measurement results of LTE Band VII(Secondary Antenna, Hotspot disabled)

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20775CH	21100CH	21425CH
5MHz	QPSK	1	0	20.03	20.74	20.78
		1	13	20.95	21.47	21.41
		1	24	20.35	20.84	20.71
		12	0	20.46	21.16	21.02
		12	6	20.78	21.41	21.31
		12	13	20.66	21.23	21.04
		25	0	20.56	21.19	21.07
	16QAM	1	0	19.96	20.67	20.93
		1	13	20.85	21.42	21.43
		1	24	20.24	20.73	20.92
		12	0	19.84	20.55	20.38
		12	6	20.19	20.83	20.59
		12	13	20.08	20.49	20.32
		25	0	19.94	20.45	20.34
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20800CH	21100CH	21400CH
10MHz	QPSK	1	0	20.10	20.75	20.71
		1	25	21.18	21.44	21.46
		1	49	19.98	20.16	20.08
		25	0	20.39	20.98	20.90
		25	13	20.80	21.28	21.18
		25	25	20.65	21.02	20.85
		50	0	20.50	21.00	20.91
	16QAM	1	0	20.07	20.84	20.78
		1	25	21.13	21.40	21.45
		1	49	19.95	20.30	20.15
		25	0	19.70	20.32	20.16
		25	13	20.11	20.50	20.46
		25	25	19.98	20.24	20.13
		50	0	19.79	20.17	20.16

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20825CH	21100CH	21375CH
15MHz	QPSK	1	0	20.46	21.17	21.21
		1	38	21.09	21.46	21.39
		1	74	20.36	20.66	20.58
		36	0	20.60	21.13	21.10
		36	18	20.81	21.31	21.22
		36	39	20.62	21.15	21.02
		75	0	20.61	21.15	21.16
	16QAM	1	0	20.54	21.30	21.28
		1	38	21.17	21.44	21.43
		1	74	20.47	20.82	20.62
		36	0	20.00	20.51	20.38
		36	18	20.23	20.71	20.53
		36	39	20.04	20.40	20.33
		75	0	19.99	20.38	20.47
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20850CH	21100CH	21350CH
20MHz	QPSK	1	0	20.72	21.33	21.33
		1	50	21.05	21.47	21.35
		1	99	20.86	21.00	20.78
		50	0	20.74	21.35	21.34
		50	25	20.84	21.34	21.30
		50	50	20.93	21.32	21.24
		100	0	20.87	21.30	21.29
	16QAM	1	0	21.08	21.22	21.05
		1	50	21.42	21.47	21.42
		1	99	21.25	21.31	20.89
		50	0	20.10	20.46	20.64
		50	25	20.21	20.56	20.57
		50	50	20.29	20.55	20.52
		100	0	20.25	20.52	20.60

Table 42: Conducted power measurement results of LTE Band VII(Main Antenna, Hotspot activated)

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20775CH	21100CH	21425CH
5MHz	QPSK	1	0	19.99	20.69	20.72
		1	13	20.90	21.43	21.35
		1	24	20.31	20.79	20.67
		12	0	20.41	21.13	20.98
		12	6	20.73	21.38	21.27
		12	13	20.61	21.17	20.97
		25	0	20.51	21.13	21.03
	16QAM	1	0	19.93	20.63	20.88
		1	13	20.80	21.39	21.39
		1	24	20.20	20.68	20.86
		12	0	19.79	20.51	20.32
		12	6	20.15	20.78	20.55
		12	13	20.03	20.46	20.28
		25	0	19.89	20.39	20.27
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20800CH	21100CH	21400CH
10MHz	QPSK	1	0	20.06	20.70	20.67
		1	25	21.13	21.41	21.42
		1	49	19.93	20.13	20.04
		25	0	20.34	20.92	20.83
		25	13	20.75	21.22	21.14
		25	25	20.62	20.98	20.80
		50	0	20.45	20.97	20.87
	16QAM	1	0	20.03	20.79	20.72
		1	25	21.10	21.36	21.40
		1	49	19.90	20.27	20.11
		25	0	19.66	20.27	20.10
		25	13	20.06	20.46	20.40
		25	25	19.94	20.19	20.09
		50	0	19.76	20.13	20.11

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20825CH	21100CH	21375CH
15MHz	QPSK	1	0	20.41	21.14	21.17
		1	38	21.04	21.43	21.35
		1	74	20.31	20.60	20.51
		36	0	20.55	21.07	21.06
		36	18	20.78	21.27	21.17
		36	39	20.57	21.12	20.98
		75	0	20.57	21.10	21.10
	16QAM	1	0	20.51	21.26	21.23
		1	38	21.12	21.41	21.39
		1	74	20.43	20.77	20.56
		36	0	19.95	20.48	20.34
		36	18	20.19	20.66	20.47
		36	39	20.01	20.36	20.28
		75	0	19.94	20.35	20.43
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20850CH	21100CH	21350CH
20MHz	QPSK	1	0	20.67	21.30	21.29
		1	50	21.00	21.41	21.31
		1	99	20.81	20.94	20.74
		50	0	20.71	21.31	21.29
		50	25	20.79	21.29	21.26
		50	50	20.89	21.27	21.18
		100	0	20.84	21.26	21.24
	16QAM	1	0	21.03	21.19	21.01
		1	50	21.38	21.42	21.36
		1	99	21.20	21.28	20.85
		50	0	20.07	20.42	20.59
		50	25	20.16	20.53	20.53
		50	50	20.25	20.50	20.46
		100	0	20.22	20.48	20.55

Table 43: Conducted power measurement results of LTE Band VII(Secondary Antenna, Hotspot activated)

7.1.10 Conducted power measurements of Downlink LTE CA

In this section, the following conducted power measurement results of downlink LTE carrier aggregation are provided to quantify downlink only carrier aggregation SAR test exclusion Per KDB 941225 D05Av01r01.

Uplink maximum output power is measured with downlink carrier aggregation active, using the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.

Power test equipment: a R&SRadio Communication Tester CMW500 was used.

Initial Conditions						
Test Environment as specified in TS 36.508[7] subclause 4.1				NC[, TL/VL, TL/VH, TH/VL, TH/VH]		
Test Frequencies as specified in TS36.508 [7] subclause 4.3.1 for different CA bandwidth classes.				A: Mid range for PCC and SCC		
Test CC Combination setting (N_{RB_agg}) as specified in subclause 5.4.2A.1 for the CA Configuration				Lowest N_{RB_agg} Highest N_{RB_agg}		
Test Parameters for CA Configurations						
CA Configuration / N_{RB_agg}		DL Allocation	CC MOD	UL Allocation		
PCC N_{RB}	SCCs N_{RB}	PCC & SCC RB allocation		N_{RB_alloc}	PCC RB allocations (L_{CRB} @ RB_{start})	
6	25	N/A for this test	QPSK	5	P_5@0	-
15	25		QPSK	4	P_4@0	-
25	50		QPSK	8	P_8@0	-
50	75		QPSK	12	P_12@0	-
75	100		QPSK	16	P_16@0	-
100	75		QPSK	18	P_18@0	-
Note 1: CA Configuration Test CC Combination settings are checked separately for each CA Configuration, which applicable aggregated channel bandwidths are specified in Table 5.4.2A.1-1						



Table 44: Conducted power measurement setup of LTE CA per 3GPP TS 36.521-1 V10.5.0

The device only supports downlink Rel. 10 LTE CA. It does not support uplink LTE CA. It does not support LTE CA between US LTE bands. The LTE CA band combinations are B3+B3, B3+B5, B3+B7, B1+B5, B2+B28, B4+B28, B7+B20, B7+B8. The LTE FCC certification bands it supports are LTE B2, B4, B5 and B7. Testing is not required in bands or modes not intended/allowed for US operation.

Bandwidth	Modulation	PCC UL RB size	PCC UL RB offset	Channel	Tx. Power (dBm)	Tune-up (dBm)	Downlink LTE CA configuration
10MHz+20MHz	QPSK	25	13	20600+19575	22.75	23	Inactive
					22.68		Active

Table 45: Conducted power measurement results of LTE CA- Band 5(PCC) + Band 3(SCC)

Bandwidth	Modulation	PCC UL RB size	PCC UL RB offset	Channel	Tx. Power (dBm)	Tune-up (dBm)	Downlink LTE CA configuration
10MHz+10MHz	QPSK	25	13	20600+18300	22.75	23	Inactive
					22.77		Active

Table 46: Conducted power measurement results of LTE CA- Band 5(PCC) + Band 1(SCC)

Bandwidth	Modulation	PCC UL RB size	PCC UL RB offset	Channel	Tx. Power (dBm)	Tune-up (dBm)	Downlink LTE CA configuration
10MHz+10MHz	QPSK	25	13	19150+27435	21.61	23	Inactive
					21.67		Active

Table 47: Conducted power measurement results of LTE CA- Band 2(PCC) + Band 28(SCC)

Bandwidth	Modulation	PCC UL RB size	PCC UL RB offset	Channel	Tx. Power (dBm)	Tune-up (dBm)	Downlink LTE CA configuration
10MHz+10MHz	QPSK	50	0	20175+27435	21.97	23	Inactive
					22.05		Active

Table 48: Conducted power measurement results of LTE CA- Band 4(PCC) + Band 28(SCC)

Bandwidth	Modulation	PCC UL RB size	PCC UL RB offset	Channel	Tx. Power (dBm)	Tune-up (dBm)	Downlink LTE CA configuration
20MHz+20MHz	QPSK	50	0	21100+19575	21.87	22.5	Inactive
					21.75		Active

Table 49: Conducted power measurement results of LTE CA- Band 7(PCC) + Band 3(SCC)

Bandwidth	Modulation	PCC UL RB size	PCC UL RB offset	Channel	Tx. Power (dBm)	Tune-up (dBm)	Downlink LTE CA configuration
20MHz+20MHz	QPSK	50	0	21100+24300	21.87	22.5	Inactive
					21.89		Active

Table 50: Conducted power measurement results of LTE CA- B7(PCC) + B20(SCC)



Bandwidth	Modulation	PCC UL RB size	PCC UL RB offset	Channel	Tx. Power (dBm)	Tune-up (dBm)	Downlink LTE CA configuration
20MHz+20MHz	QPSK	50	0	21100+21750	21.87	22.5	Inactive
					21.92		Active

Table 51: Conducted power measurement results of LTE CA- B7(PCC) + B8(SCC)

Per KDB 941225 D05Av01r01, SAR testing and PBA requirements for downlink LTE-CA can be excluded.

7.1.11 Conducted power measurements of WiFi 2.4G

The output power of WiFi antenna is as following:

Wi-Fi 2450MHz	Channel	Average Power (dBm) for Data Rates (Mbps)							
		1	2	5.5	11	/	/	/	/
802.11b	1	14.66	14.61	14.59	14.58	/	/	/	/
	6	15.25	15.23	15.21	15.31	/	/	/	/
	11	14.89	14.89	14.88	14.88	/	/	/	/
802.11g	Channel	6	9	12	18	24	36	48	54
	1	14.85	14.67	14.82	14.83	14.83	14.75	14.73	14.76
	6	15.44	15.42	15.40	15.38	15.32	15.28	15.22	15.20
	11	15.00	15.02	15.03	15.05	15.01	14.97	14.93	14.90
802.11n (HT20,800ns)	Channel	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
	1	14.44	14.42	14.4	14.39	14.36	14.34	14.32	14.31
	6	14.49	14.46	14.44	14.43	14.41	14.39	14.38	14.36
	11	14.26	14.24	14.22	14.19	14.18	14.16	14.14	14.13
802.11n (HT20,800ns)	Channel	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
	3	13.62	13.60	13.59	13.56	13.54	13.52	13.50	13.49
	6	13.74	13.72	13.71	13.69	13.66	13.64	13.63	13.60
	9	14.11	14.09	14.08	14.06	14.04	14.02	13.99	13.98

Table 52: Conducted power measurement results of WiFi 2.4G.

Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) Per KDB248227, for WiFi 2.4GHz, highest average RF output power channel for the lowest data rate of 802.11b mode was selected for SAR evaluation. SAR test at higher data rates and higher order modulations (including 802.11g/n) were not required since the maximum average output power for each of these configurations is not more than 1/4dB higher than the tested channel for the lowest data rate of 802.11b mode.

7.1.12 Conducted power measurements of WiFi 5G

Mode	Channel	Frequency (MHz)	Average Power (dBm)							
			Data Rate (bps)							
			6M	9M	12M	18M	24M	36M	48M	54M
802.11a	CH 36	5180	14.46	13.94	13.88	13.73	13.64	13.24	13.24	12.88
	CH 40	5200	14.53	14.05	13.95	13.85	13.71	13.31	13.31	12.95
	CH 44	5220	14.49	13.95	13.91	13.81	13.67	13.27	13.27	12.91
	CH 48	5240	14.44	13.89	13.86	13.72	13.62	13.22	13.22	12.86
	CH 52	5260	14.42	13.93	13.84	13.74	13.60	13.20	13.20	12.84
	CH 56	5280	14.26	13.74	13.68	13.58	13.44	13.04	13.04	12.68
	CH 60	5300	14.21	13.65	13.63	13.53	13.39	12.99	12.99	12.63
	CH 64	5320	14.08	13.56	13.50	13.40	13.26	12.86	12.86	12.50
	CH 100	5500	14.70	14.13	14.12	14.01	13.88	13.48	13.48	13.12
	CH 104	5520	14.79	14.31	14.20	14.13	13.92	13.74	13.16	13.17
	CH 108	5540	14.77	14.28	14.19	14.15	13.89	13.68	13.17	13.14
	CH 112	5560	14.82	14.32	14.28	14.18	14.01	13.70	13.32	13.20
	CH 116	5580	14.80	14.33	14.25	14.15	14.01	13.65	13.28	13.15
	CH 132	5660	14.23	13.71	13.65	13.55	13.41	13.01	13.01	12.65
	CH 136	5680	14.00	13.48	13.42	13.32	13.18	12.78	12.78	12.42
	CH 140	5700	13.85	13.33	13.27	13.17	13.03	12.63	12.63	12.27
	CH 149	5745	13.79	13.27	13.21	13.11	12.97	12.57	12.57	12.21
	CH 153	5765	13.58	13.06	13.00	12.90	12.76	12.36	12.36	12.00
CH 157	5785	13.68	13.16	13.10	13.00	12.86	12.46	12.46	12.10	
CH 161	5805	13.80	13.28	13.22	13.12	12.98	12.58	12.58	12.22	
CH 165	5825	13.56	13.04	12.98	12.88	12.74	12.34	12.34	12.08	

Mode	Channel	Frequency (MHz)	Average Power (dBm)							
			Data Rate (bps)							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n- HT20	CH 36	5180	14.39	13.82	13.73	13.59	13.51	13.09	12.73	12.61
	CH 40	5200	14.49	13.95	13.84	13.74	13.59	13.19	12.84	12.71
	CH 44	5220	14.40	13.81	13.76	13.61	13.51	13.11	12.73	12.63
	CH 48	5240	14.41	13.83	13.76	13.60	13.50	13.10	12.78	12.62
	CH 52	5260	14.32	13.72	13.68	13.52	13.45	13.05	12.68	12.54
	CH 56	5280	14.16	13.57	13.50	13.34	13.28	12.88	12.51	12.36
	CH 60	5300	14.11	13.50	13.46	13.33	13.22	12.82	12.47	12.35
	CH 64	5320	14.00	13.43	13.33	13.21	13.12	12.71	12.35	12.23
	CH 100	5500	14.61	14.03	13.97	13.81	13.71	13.33	12.94	12.83
	CH 104	5520	14.71	14.12	14.05	13.92	13.82	13.41	13.06	12.94
	CH 108	5540	14.70	14.12	14.05	13.90	13.82	13.41	13.06	12.92
	CH 112	5560	14.72	14.12	14.05	13.90	13.82	13.41	13.06	12.77
	CH 116	5580	14.70	14.11	14.07	13.92	13.81	13.42	13.05	12.94
	CH 132	5660	14.13	13.52	13.49	13.34	13.22	12.85	12.48	12.36
	CH 136	5680	13.90	13.32	13.25	13.10	13.03	12.61	12.26	12.12
	CH 140	5700	13.75	13.15	13.11	12.97	12.86	12.44	12.09	11.99
	CH 149	5745	13.69	13.10	13.03	12.90	12.81	12.42	12.04	11.92
	CH 153	5765	13.48	12.87	12.83	12.68	12.58	12.17	11.84	11.70
CH 157	5785	13.58	13.01	12.91	12.79	12.69	12.31	11.93	11.81	
CH 161	5805	13.70	13.12	13.05	12.90	12.82	12.42	12.06	11.92	
CH 165	5825	13.46	12.87	12.81	12.68	12.57	12.18	11.82	11.70	
Mode	Channel	Frequency (MHz)	Average Power (dBm)							
			Data Rate (bps)							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n- HT40	CH 38	5190	14.02	13.64	13.31	13.01	12.45	12.16	11.94	11.74
	CH 46	5230	13.66	13.39	13.04	12.78	12.33	12.01	11.68	11.35
	CH 54	5270	13.45	13.35	13.00	12.68	12.14	11.75	11.42	11.23
	CH 62	5310	13.16	13.01	13.65	13.24	13.01	12.65	12.31	10.97
	CH 102	5510	13.94	13.61	13.35	13.01	12.75	12.41	12.05	11.64
	CH 110	5550	13.96	13.65	13.33	13.04	12.74	12.38	12.09	11.68
	CH 134	5670	13.37	13.01	12.73	12.45	12.12	11.75	11.42	11.08
	CH 151	5755	13.09	12.88	12.59	12.25	11.95	11.65	11.31	10.95
	CH 159	5795	13.05	12.78	12.39	12.12	11.81	11.54	11.19	10.82

Table 53: Conducted power measurement results of WiFi 5G.

Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) Per KDB248227D01v01r02 and October 2012/April 2013 FCC/TCB workshop meeting notes:for WiFi 5GHz, highest average RF output power channel for the lowest data rate of 802.11a mode was selected for SAR evaluation. SAR test at higher data rates and higher order modulations (including 802.11n 20MHz and 40MHz) were not required since the maximum average output power for each of these configurations is not more than 1/4dB higher than the tested channel for the lowest data rate of 802.11a mode..

7.1.13 Conducted power measurements of BT

The output power of BT antenna is as following:

BT 2450	Average Conducted Power (dBm)		
	0CH	39CH	78CH
DH5	5.48	6.60	5.50
2DH5	3.36	3.93	2.66
3DH5	2.62	3.94	3.44

BT 2450	Average Conducted Power (dBm)		
	0CH	19CH	39CH
BT(4.0)	4.75	6.60	5.50

Table 54: Conducted power measurement results of BT.

Note: The conducted power of BT is measured with RMS detector.

7.2 SAR measurement Results

General Notes:

- 1) Per KDB447498 D01v05r02, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D01v05r02, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/Kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/Kg, only one repeated measurement is required.
- 4) Per KDB941225 D06v01r01, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04v01r02, SAR is evaluated without a headset connected to the device. When the standalone reported Body-Worn SAR is ≤ 1.2 W/kg, no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02v01r01, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for details).
- 7) Per KDB 648474 D04v01r02, since the device is a phablet, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; When power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold. As WiFi 5G does not support hotspot function, therefore the UMPC mini-tablet procedures must also be applied to test the 10-g extremity SAR SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge.

GSM Notes:

- 1) Per KDB648474 D04v01r02, body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
- 2) Per KDB941225 D03v01, when multiple slots can be used, the GPRS/EDGE slot configuration with the highest frame-averaged output power was selected for SAR testing.

UMTS Notes:

- 1) Per KDB941225 D01v02, when maximum output of each RF channel with HSDPA/HSUPA active is $\leq 1/4$ dB higher than without HSDPA/HSUPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of SAR limit, SAR evaluation for HSDPA/HSUPA is not required.
- 2) Per KDB941225 D02v02r02, when the maximum average output power of each RF channel with (uplink) HSPA+/DC-HSDPA active is $\leq 1/4$ dB higher than that measured without HSPA+/DC-HSDPA using 12.2 kbps RMC, or the maximum reported SAR for 12.2 kbps RMC without HSPA+/DC-HSDPA/ is $\leq 75\%$ of the SAR limit, SAR evaluation for HSPA+/DC-HSDPA is not required.

LTE notes:

- 1) The LTE test configurations are determined according to KDB941225 D05 SAR for LTE Devices v02r03. The general test procedures used for SAR testing can be found in Section 6.3.
- 2) A-MPR was disabled for all SAR test by setting NS_01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI)

WLAN Notes:

Per KDB248227D01v01r02 and October 2012/April 2013 FCC/TCB workshop meeting notes:

- 1) For WiFi 2.4GHz, highest average RF output power channel for the lowest data rate of 802.11b mode was selected for SAR evaluation. SAR test at higher data rates and higher order modulations (including 802.11g/n) were not required since the maximum average output power for each of these configurations is not more than 1/4dB higher than the tested channel for the lowest data rate of 802.11b mode.
- 2) For WiFi 5GHz, highest average RF output power channel for the lowest data rate of 802.11a mode was selected for SAR evaluation. SAR test at higher data rates and higher order modulations (including 802.11n 20MHz and 40MHz) were not required since the maximum average output power for each of these configurations is not more than 1/4dB higher than the tested channel for the lowest data rate of 802.11a mode.

7.2.1 SAR measurement Result of GSM850

Test Position of Head	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
Left Hand Touched	190/836.6	GSM	0.384	0.252	-0.060	32.95	33.50	0.436	21.4°C
Left Hand Tilted 15°	190/836.6	GSM	0.326	0.201	-0.040	32.95	33.50	0.370	21.4°C
Right Hand Touched	190/836.6	GSM	0.560	0.320	0.020	32.95	33.50	0.636	21.4°C
Right Hand Tilted 15°	190/836.6	GSM	0.504	0.260	-0.040	32.95	33.50	0.572	21.4°C
Right Hand Touched	128/824.2	GSM	0.542	0.310	0.040	32.93	33.50	0.618	21.4°C
Right Hand Touched	251/848.8	GSM	0.547	0.314	0.020	32.95	33.50	0.621	21.4°C
Main antenna									
Left Hand Touched	190/836.6	GSM	0.102	0.079	0.100	32.98	33.50	0.115	21.4°C
Left Hand Tilted 15°	190/836.6	GSM	0.058	0.046	0.050	32.98	33.50	0.065	21.4°C
Right Hand Touched	190/836.6	GSM	0.100	0.077	0.090	32.98	33.50	0.113	21.4°C
Right Hand Tilted 15°	190/836.6	GSM	0.056	0.044	0.100	32.98	33.50	0.063	21.4°C
Tested at the Worst position with battery 2#									
Right Hand Touched	251/848.8	GSM	0.367	0.207	0.110	32.95	33.50	0.417	21.4°C

Table 55: Head SAR test results of GSM850

Test Position of Body-Worn with 15mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
Front Side	190/836.6	GSM	0.058	0.041	0.060	32.95	33.50	0.066	21.4°C
Back Side	190/836.6	GSM	0.061	0.047	0.170	32.95	33.50	0.070	21.4°C
Main antenna									
Front Side	190/836.6	GSM	0.104	0.081	-0.010	32.98	33.50	0.117	21.4°C
Back Side	190/836.6	GSM	0.150	0.117	0.080	32.98	33.50	0.169	21.4°C
Tested at the Worst position with battery 2#									
Back Side	190/836.6	GSM	0.148	0.116	0.070	32.98	33.50	0.167	21.4°C

Table 56: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
Front Side	190/836.6	GPRS 2TS	0.133	0.091	-0.040	31.03	31.50	0.148	21.4°C
Back Side	190/836.6	GPRS 2TS	0.148	0.099	0.050	31.03	31.50	0.165	21.4°C
Left Side	190/836.6	GPRS 2TS	0.088	0.061	0.010	31.03	31.50	0.098	21.4°C
Top Side	190/836.6	GPRS 2TS	0.171	0.108	-0.140	31.03	31.50	0.191	21.4°C
Main antenna									
Front Side	190/836.6	GPRS 2TS	0.172	0.130	-0.180	31.06	31.50	0.190	21.4°C
Back Side	190/836.6	GPRS 2TS	0.246	0.194	-0.040	31.06	31.50	0.272	21.4°C
Left Side	190/836.6	GPRS 2TS	0.173	0.119	-0.030	31.06	31.50	0.191	21.4°C
Right Side	190/836.6	GPRS 2TS	0.196	0.135	-0.030	31.06	31.50	0.217	21.4°C
Bottom Side	190/836.6	GPRS 2TS	0.048	0.026	0.000	31.06	31.50	0.053	21.4°C
Tested at the Worst position with battery 2#									
Back Side	190/836.6	GPRS 2TS	0.241	0.188	-0.050	31.06	31.50	0.267	21.4°C

Table 57: Hotspot SAR test results of GSM850

7.2.2 SAR measurement Result of GSM1900

Test Position of Head	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
Left Hand Touched	661/1880	GSM	0.150	0.074	0.060	29.73	30.50	0.179	21.4°C
Left Hand Tilted 15°	661/1880	GSM	0.150	0.071	0.030	29.73	30.50	0.179	21.4°C
Right Hand Touched	661/1880	GSM	0.371	0.160	0.090	29.73	30.50	0.443	21.4°C
Right Hand Tilted 15°	661/1880	GSM	0.375	0.158	0.060	29.73	30.50	0.448	21.4°C
Right Hand Touched	512/1850.2	GSM	0.306	0.132	0.040	29.76	30.50	0.363	21.4°C
Right Hand Touched	810/1909.8	GSM	0.451	0.193	0.100	29.78	30.50	0.532	21.4°C
Main antenna									
Left Hand Touched	661/1880	GSM	0.047	0.031	0.130	29.76	30.50	0.056	21.4°C
Left Hand Tilted 15°	661/1880	GSM	0.050	0.032	0.080	29.76	30.50	0.059	21.4°C
Right Hand Touched	661/1880	GSM	0.075	0.048	0.070	29.76	30.50	0.089	21.4°C
Right Hand Tilted 15°	661/1880	GSM	0.055	0.031	0.100	29.76	30.50	0.065	21.4°C
Tested at the Worst position with battery 2#									
Right Hand Touched	810/1909.8	GSM	0.556	0.241	0.030	29.78	30.50	0.656	21.4°C

Table 58: Table 59: Head SAR test results of GSM1900

Test Position of Body-Worn with 15mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
Front Side	661/1880	GSM	0.029	0.016	-0.130	29.73	30.50	0.034	21.4°C
Back Side	661/1880	GSM	0.026	0.015	-0.020	29.73	30.50	0.031	21.4°C
Main antenna									
Front Side	661/1880	GSM	0.167	0.096	-0.190	29.76	30.50	0.198	21.4°C
Back Side	661/1880	GSM	0.271	0.148	0.160	29.76	30.50	0.321	21.4°C
Tested at the Worst position with battery 2#									
Back Side	661/1880	GSM	0.262	0.143	-0.090	29.76	30.50	0.311	21.4°C

Table 60: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
Front Side	661/1880	GPRS 2TS	0.081	0.041	0.080	24.59	25.50	0.100	21.4°C
Back Side	661/1880	GPRS 2TS	0.064	0.033	-0.060	24.59	25.50	0.079	21.4°C
Left side	661/1880	GPRS 2TS	0.010	0.006	0.120	24.59	25.50	0.013	21.4°C
Top Side	661/1880	GPRS 2TS	0.195	0.087	0.020	24.59	25.50	0.240	21.4°C
Main antenna									
Front Side	661/1880	GPRS 2TS	0.241	0.129	0.110	24.62	25.50	0.295	21.4°C
Back Side	661/1880	GPRS 2TS	0.356	0.178	0.070	24.62	25.50	0.436	21.4°C
Left side	661/1880	GPRS 2TS	0.032	0.019	-0.160	24.62	25.50	0.039	21.4°C
Right side	661/1880	GPRS 2TS	0.052	0.030	-0.150	24.62	25.50	0.064	21.4°C
Bottom side	661/1880	GPRS 2TS	0.573	0.292	0.030	24.62	25.50	0.702	21.4°C
Tested at the Worst position with battery 2#									
Bottom Side	661/1880	GPRS 2TS	0.591	0.300	-0.080	24.62	25.50	0.724	21.4°C

Table 61: Hotspot SAR test results of GSM1900

7.2.3 SAR measurement Result of UMTS Band V

Test Position of Head	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
Left Hand Touched	4182/836.4	RMC	0.330	0.217	-0.080	23.58	24.00	0.364	21.4°C
Left Hand Tilted 15°	4182/836.4	RMC	0.280	0.173	0.040	23.58	24.00	0.308	21.4°C
Right Hand Touched	4182/836.4	RMC	0.478	0.272	0.040	23.58	24.00	0.527	21.4°C
Right Hand Tilted 15°	4182/836.4	RMC	0.421	0.217	0.050	23.58	24.00	0.464	21.4°C
Right Hand Touched	4132/826.4	RMC	0.599	0.341	0.120	23.65	24.00	0.649	21.4°C
Right Hand Touched	4233/846.6	RMC	0.408	0.230	0.060	23.55	24.00	0.453	21.4°C
Main antenna									
Left Hand Touched	4182/836.4	RMC	0.107	0.084	0.050	23.63	24.00	0.117	21.4°C
Left Hand Tilted 15°	4182/836.4	RMC	0.064	0.049	0.120	23.63	24.00	0.069	21.4°C
Right Hand Touched	4182/836.4	RMC	0.126	0.097	0.050	23.63	24.00	0.137	21.4°C
Right Hand Tilted 15°	4182/836.4	RMC	0.071	0.057	-0.060	23.63	24.00	0.077	21.4°C
Tested at the Worst position with battery 2#									
Right Hand Touched	4132/826.4	RMC	0.505	0.284	0.010	23.65	24.00	0.547	21.4°C

Table 62: Head SAR test results of UMTS Band V

Test Position of Body-Worn with 15mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
Front Side	4182/836.4	RMC	0.038	0.030	0.040	23.58	24.00	0.042	21.4°C
Back Side	4182/836.4	RMC	0.046	0.035	0.010	23.58	24.00	0.050	21.4°C
Main antenna									
Front Side	4182/836.4	RMC	0.128	0.100	0.020	23.63	24.00	0.139	21.4°C
Back Side	4182/836.4	RMC	0.185	0.144	0.070	23.63	24.00	0.201	21.4°C
Tested at the Worst position with battery 2#									
Back Side	4182/836.4	RMC	0.183	0.143	0.050	23.63	24.00	0.199	21.4°C

Table 63: Body-Worn SAR test results of UMTS Band V

Test Position of Hotspot with 10mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
Front Side	4182/836.4	RMC	0.086	0.059	0.020	23.58	24.00	0.095	21.4°C
Back Side	4182/836.4	RMC	0.090	0.068	0.130	23.58	24.00	0.099	21.4°C
Left Side	4182/836.4	RMC	0.072	0.050	0.020	23.58	24.00	0.079	21.4°C
Top Side	4182/836.4	RMC	0.002	0.001	0.190	23.58	24.00	0.002	21.4°C
Main antenna									
Front Side	4182/836.4	RMC	0.135	0.105	0.030	23.63	24.00	0.147	21.4°C
Back Side	4182/836.4	RMC	0.213	0.167	0.030	23.63	24.00	0.232	21.4°C
Left Side	4182/836.4	RMC	0.205	0.140	0.100	23.63	24.00	0.223	21.4°C
Right Side	4182/836.4	RMC	0.209	0.143	0.080	23.63	24.00	0.228	21.4°C
Bottom Side	4182/836.4	RMC	0.037	0.019	0.060	23.63	24.00	0.040	21.4°C
Tested at the Worst position with battery 2#									
Back Side	4182/836.4	RMC	0.202	0.157	-0.100	23.63	24.00	0.220	21.4°C

Table 64: Hotspot SAR test results of UMTS Band V

7.2.4 SAR measurement Result of UMTS Band IV

Test Position of Head	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
Left Hand Touched	1413/1732.6	RMC	0.182	0.087	-0.080	23.23	24.00	0.217	21.4°C
Left Hand Tilted 15°	1413/1732.6	RMC	0.197	0.094	-0.040	23.23	24.00	0.235	21.4°C
Right Hand Touched	1413/1732.6	RMC	0.261	0.116	0.140	23.23	24.00	0.312	21.4°C
Right Hand Tilted 15°	1413/1732.6	RMC	0.258	0.011	0.050	23.23	24.00	0.308	21.4°C
Right Hand Touched	1312/1712.4	RMC	0.230	0.104	0.140	23.53	24.00	0.256	21.4°C
Right Hand Touched	1513/1752.6	RMC	0.302	0.135	0.160	23.33	24.00	0.352	21.4°C
Main antenna									
Left Hand Touched	1413/1732.6	RMC	0.020	0.011	-0.090	23.27	24.00	0.024	21.4°C
Left Hand Tilted 15°	1413/1732.6	RMC	0.032	0.018	0.030	23.27	24.00	0.038	21.4°C
Right Hand Touched	1413/1732.6	RMC	0.062	0.040	-0.190	23.27	24.00	0.074	21.4°C
Right Hand Tilted 15°	1413/1732.6	RMC	0.034	0.019	0.120	23.27	24.00	0.041	21.4°C
Tested at the Worst position with battery 2#									
Right Hand Touched	1413/1732.6	RMC	0.305	0.136	0.190	23.23	24.00	0.364	21.4°C

Table 65: Head SAR test results of UMTS Band IV

Test Position of Body-Worn with 15mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
Front Side	1413/1732.6	RMC	0.046	0.025	-0.120	23.23	24.00	0.055	21.4°C
Back Side	1413/1732.6	RMC	0.043	0.024	0.170	23.23	24.00	0.052	21.4°C
Main antenna									
Front Side	1413/1732.6	RMC	0.488	0.283	-0.140	23.27	24.00	0.577	21.4°C
Back Side	1413/1732.6	RMC	0.811	0.452	0.180	23.27	24.00	0.959	21.4°C
Back Side	1312/1712.4	RMC	0.705	0.397	0.140	23.55	24.00	0.782	21.4°C
Back Side	1513/1752.6	RMC	0.670	0.371	-0.070	23.37	24.00	0.775	21.4°C
Tested at the Worst position with battery 2#									
Back Side	1413/1732.6	RMC	0.849	0.476	-0.110	23.27	24.00	1.004	21.4°C
Back Side-repeated	1413/1732.6	RMC	0.845	0.473	0.190	23.27	24.00	1.000	21.4°C

Table 66: Body-Worn SAR test results of UMTS Band IV

Test Position of Hotspot with 10mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
Front Side	1413/1732.6	RMC	0.108	0.054	-0.080	18.87	19.50	0.125	21.4°C
Back Side	1413/1732.6	RMC	0.096	0.049	0.150	18.87	19.50	0.110	21.4°C
Left Side	1413/1732.6	RMC	0.009	0.005	0.130	18.87	19.50	0.010	21.4°C
Top Side	1413/1732.6	RMC	0.177	0.081	0.130	18.87	19.50	0.205	21.4°C
Main antenna									
Front Side	1413/1732.6	RMC	0.505	0.272	0.130	18.91	19.50	0.578	21.4°C
Back Side	1413/1732.6	RMC	0.708	0.360	0.120	18.91	19.50	0.811	21.4°C
Back Side	1312/1712.4	RMC	0.549	0.281	0.140	18.96	19.50	0.622	21.4°C
Back Side	1513/1752.6	RMC	0.586	0.296	0.010	18.72	19.50	0.701	21.4°C
Left Side	1413/1732.6	RMC	0.014	0.009	0.120	18.91	19.50	0.016	21.4°C
Right Side	1413/1732.6	RMC	0.028	0.017	0.160	18.91	19.50	0.033	21.4°C
Bottom Side	1413/1732.6	RMC	0.955	0.502	0.140	18.91	19.50	1.094	21.4°C
Bottom Side-repeated*	1413/1732.6	RMC	0.904	0.464	0.120	18.91	19.50	1.036	21.4°C
Bottom Side	1312/1712.4	RMC	0.737	0.388	0.180	18.96	19.50	0.835	21.4°C
Bottom Side	1513/1752.6	RMC	0.799	0.419	0.170	18.72	19.50	0.956	21.4°C
Tested at the Worst position with battery 2#									
Bottom Side	1413/1732.6	RMC	0.841	0.434	0.180	18.91	19.50	0.963	21.4°C

Table 67: Hotspot SAR test results of UMTS Band IV

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664

7.2.5 SAR measurement Result of UMTS Band II

Test Position of Head	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
Left Hand Touched	9400/1880	RMC	0.212	0.103	0.010	23.46	24.00	0.240	21.4°C
Left Hand Tilted 15°	9400/1880	RMC	0.217	0.102	-0.020	23.46	24.00	0.246	21.4°C
Right Hand Touched	9400/1880	RMC	0.521	0.224	0.040	23.46	24.00	0.590	21.4°C
Right Hand Tilted 15°	9400/1880	RMC	0.477	0.201	-0.010	23.46	24.00	0.540	21.4°C
Right Hand Touched	9262/1852.4	RMC	0.574	0.248	-0.170	23.43	24.00	0.655	21.4°C
Right Hand Touched	9538/1907.6	RMC	0.566	0.241	0.160	23.38	24.00	0.653	21.4°C
Main antenna									
Left Hand Touched	9400/1880	RMC	0.091	0.060	-0.140	23.50	24.00	0.102	21.4°C
Left Hand Tilted 15°	9400/1880	RMC	0.100	0.064	-0.030	23.50	24.00	0.112	21.4°C
Right Hand Touched	9400/1880	RMC	0.148	0.095	0.110	23.50	24.00	0.166	21.4°C
Right Hand Tilted 15°	9400/1880	RMC	0.112	0.060	0.170	23.50	24.00	0.126	21.4°C
Tested at the Worst position with battery 2#									
Right Hand Touched	9262/1852.4	RMC	0.548	0.242	-0.100	23.43	24.00	0.625	21.4°C

Table 68: Head SAR test results of UMTS Band II

Test Position of Body-Worn with 15mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
Front Side	9400/1880	RMC	0.032	0.017	0.060	23.46	24.00	0.036	21.4°C
Back Side	9400/1880	RMC	0.033	0.018	0.060	23.46	24.00	0.037	21.4°C
Main antenna									
Front Side	9400/1880	RMC	0.422	0.241	0.170	23.50	24.00	0.473	21.4°C
Back Side	9400/1880	RMC	0.595	0.325	0.080	23.50	24.00	0.668	21.4°C
Tested at the Worst position with battery 2#									
Back Side	9400/1880	RMC	0.558	0.302	-0.040	23.50	24.00	0.626	21.4°C

Table 69: Body-Worn SAR test results of UMTS Band II



Test Position of Hotspot with 10mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
Front Side	9400/1880	RMC	0.074	0.037	-0.020	19.36	20.00	0.086	21.4°C
Back Side	9400/1880	RMC	0.093	0.046	0.050	19.36	20.00	0.107	21.4°C
Left side	9400/1880	RMC	0.012	0.007	0.130	19.36	20.00	0.014	21.4°C
Top Side	9400/1880	RMC	0.161	0.075	0.020	19.36	20.00	0.187	21.4°C
Main antenna									
Front Side	9400/1880	RMC	0.326	0.173	0.080	19.40	20.00	0.374	21.4°C
Back Side	9400/1880	RMC	0.518	0.256	0.140	19.40	20.00	0.595	21.4°C
Left side	9400/1880	RMC	0.039	0.023	0.120	19.40	20.00	0.045	21.4°C
Right side	9400/1880	RMC	0.063	0.037	0.080	19.40	20.00	0.072	21.4°C
Bottom side	9400/1880	RMC	0.781	0.396	-0.170	19.40	20.00	0.897	21.4°C
Bottom side	9262/1852.4	RMC	0.806	0.414	0.040	19.20	20.00	0.969	21.4°C
Bottom side	9538/1907.6	RMC	0.621	0.312	0.150	19.40	20.00	0.713	21.4°C
Tested at the Worst position with battery 2#									
Bottom Side	9262/1852.4	RMC	0.808	0.414	-0.040	19.20	20.00	0.971	21.4°C
Bottom Side-repeated*	9262/1852.4	RMC	0.810	0.415	-0.030	19.20	20.00	0.974	21.4°C

Table 70: Hotspot SAR test results of UMTS Band II

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664

7.2.6 SAR measurement Result of LTE Band II

Test Position of Head	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
QPSK 1RB									
Left Hand Touched	19100/1900	20M QPSK 1RB#0	0.256	0.119	-0.100	22.71	24.00	0.345	21.4°C
Left Hand Tilted 15°	19100/1900	20M QPSK 1RB#0	0.256	0.119	0.000	22.71	24.00	0.345	21.4°C
Right Hand Touched	19100/1900	20M QPSK 1RB#0	0.536	0.226	0.020	22.71	24.00	0.721	21.4°C
Right Hand Tilted 15°	19100/1900	20M QPSK 1RB#0	0.529	0.216	0.030	22.71	24.00	0.712	21.4°C
Right Hand Touched	18700/1860	20M QPSK 1RB#50	0.413	0.174	0.080	22.36	24.00	0.602	21.4°C
Right Hand Touched	18900/1880	20M QPSK 1RB#50	0.249	0.104	0.110	22.56	24.00	0.347	21.4°C
QPSK 50%RB									
Left Hand Touched	19100/1900	20M QPSK 50%RB#0	0.204	0.095	0.020	21.74	23.00	0.273	21.4°C
Left Hand Tilted 15°	19100/1900	20M QPSK 50%RB#0	0.206	0.095	0.050	21.74	23.00	0.275	21.4°C
Right Hand Touched	19100/1900	20M QPSK 50%RB#0	0.448	0.187	0.060	21.74	23.00	0.599	21.4°C
Right Hand Tilted 15°	19100/1900	20M QPSK 50%RB#0	0.445	0.180	0.090	21.74	23.00	0.595	21.4°C
Main antenna									
QPSK 1RB									
Left Hand Touched	19100/1900	20M QPSK 1RB#0	0.086	0.054	-0.160	22.75	24.00	0.114	21.4°C
Left Hand Tilted 15°	19100/1900	20M QPSK 1RB#0	0.082	0.051	0.110	22.75	24.00	0.109	21.4°C
Right Hand Touched	19100/1900	20M QPSK 1RB#0	0.103	0.066	0.140	22.75	24.00	0.137	21.4°C
Right Hand Tilted 15°	19100/1900	20M QPSK 1RB#0	0.084	0.043	0.060	22.75	24.00	0.112	21.4°C
QPSK 50%RB									
Left Hand Touched	19100/1900	20M QPSK 50%RB#0	0.085	0.054	-0.120	21.75	23.00	0.113	21.4°C
Left Hand Tilted 15°	19100/1900	20M QPSK 50%RB#0	0.080	0.050	0.160	21.75	23.00	0.107	21.4°C
Right Hand Touched	19100/1900	20M QPSK 50%RB#0	0.099	0.006	0.020	21.75	23.00	0.132	21.4°C
Tested at the Worst position with battery 2#									
Right Hand Touched	19100/1900	20M QPSK 1RB#0	0.675	0.282	0.020	22.71	24.00	0.908	21.4°C
Right Hand Touched	18700/1860	20M QPSK 1RB#50	0.533	0.224	-0.020	22.36	24.00	0.778	21.4°C
Right Hand Touched	18900/1880	20M QPSK 1RB#50	0.422	0.178	0.080	22.56	24.00	0.588	21.4°C

Table 71: Head SAR test results of LTE Band II

Test Position of Body-Worn with 15mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
QPSK 1RB									
Front Side	19100/1900	20M QPSK 1RB#0	0.041	0.022	0.030	22.71	24.00	0.055	21.4°C
Back Side	19100/1900	20M QPSK 1RB#0	0.045	0.024	0.040	22.71	24.00	0.060	21.4°C
QPSK 50%RB									
Front Side	19100/1900	20M QPSK 50%RB#0	0.033	0.018	-0.120	21.74	23.00	0.044	21.4°C
Back Side	19100/1900	20M QPSK 50%RB#0	0.034	0.019	0.120	21.74	23.00	0.046	21.4°C
Main antenna									
QPSK 1RB									
Front Side	19100/1900	20M QPSK 1RB#0	0.238	0.137	0.180	22.75	24.00	0.317	21.4°C
Back Side	19100/1900	20M QPSK 1RB#0	0.331	0.181	-0.080	22.75	24.00	0.441	21.4°C
QPSK 50%RB									
Front Side	19100/1900	20M QPSK 50%RB#0	0.241	0.138	0.150	21.75	23.00	0.321	21.4°C
Back Side	19100/1900	20M QPSK 50%RB#0	0.315	0.173	0.120	21.75	23.00	0.420	21.4°C
Tested at the Worst position with battery 2#									
Back Side	19100/1900	20M QPSK 1RB#0	0.393	0.212	0.140	22.75	24.00	0.524	21.4°C

Table 72: Body-Worn SAR test results of LTE Band II

Test Position of Hotspot with 10mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
QPSK 1RB									
Front Side	19100/1900	20M QPSK 1RB#0	0.087	0.044	-0.190	19.88	20.50	0.100	21.4°C
Back Side	19100/1900	20M QPSK 1RB#0	0.091	0.046	-0.170	19.88	20.50	0.105	21.4°C
Left Side	19100/1900	20M QPSK 1RB#0	0.013	0.007	0.120	19.88	20.50	0.015	21.4°C
Top Side	19100/1900	20M QPSK 1RB#0	0.192	0.089	0.190	19.88	20.50	0.221	21.4°C
QPSK 50%RB									
Front Side	19100/1900	20M QPSK 50%RB#0	0.071	0.036	0.070	19.65	20.50	0.086	21.4°C
Back Side	19100/1900	20M QPSK 50%RB#0	0.076	0.038	0.070	19.65	20.50	0.092	21.4°C
Left Side	19100/1900	20M QPSK 50%RB#0	0.007	0.004	0.140	19.65	20.50	0.008	21.4°C
Top Side	19100/1900	20M QPSK 50%RB#0	0.168	0.077	0.170	19.65	20.50	0.204	21.4°C
Main antenna									
QPSK 1RB									
Front Side	19100/1900	20M QPSK 1RB#0	0.285	0.151	0.040	19.92	20.50	0.326	21.4°C
Back Side	19100/1900	20M QPSK 1RB#0	0.417	0.208	0.050	19.92	20.50	0.477	21.5°C
Left Side	19100/1900	20M QPSK 1RB#0	0.045	0.028	-0.020	19.92	20.50	0.052	21.4°C
Right Side	19100/1900	20M QPSK 1RB#0	0.087	0.051	0.030	19.92	20.50	0.099	21.4°C
Bottom Side	19100/1900	20M QPSK 1RB#0	0.638	0.322	0.090	19.92	20.50	0.729	21.4°C
Bottom Side	18700/1860	20M QPSK 1RB#50	0.891	0.458	0.120	19.69	20.50	1.074	21.4°C
Bottom Side	18900/1880	20M QPSK 1RB#50	0.638	0.324	0.000	19.87	20.50	0.738	21.4°C
QPSK 50%RB									
Front Side	19100/1900	20M QPSK 50%RB#0	0.335	0.178	0.160	19.71	20.50	0.402	21.4°C
Back Side	19100/1900	20M QPSK 50%RB#0	0.498	0.247	0.030	19.71	20.50	0.597	21.4°C
Left Side	19100/1900	20M QPSK 50%RB#0	0.069	0.041	0.030	19.71	20.50	0.083	21.4°C
Right Side	19100/1900	20M QPSK 50%RB#0	0.096	0.056	0.030	19.71	20.50	0.115	21.4°C
Bottom Side	19100/1900	20M QPSK 50%RB#0	0.725	0.364	-0.180	19.71	20.50	0.870	21.4°C
Bottom Side	18700/1860	20M QPSK 50%RB#50	0.905	0.463	0.120	19.42	20.50	1.161	21.4°C



Bottom Side	18900/1880	20M QPSK 50%RB#0	0.629	0.327	0.070	19.67	20.50	0.761	21.4°C
QPSK 100%RB									
Bottom Side	19100/1900	20M QPSK 100%RB#0	0.691	0.347	0.130	19.76	20.50	0.819	21.4°C
Tested at the Worst position with battery 2#									
Bottom Side	18700/1860	20M QPSK 50%RB#50	0.927	0.471	-0.090	19.42	20.50	1.189	21.4°C
Bottom Side repeated*	18700/1860	20M QPSK 50%RB#50	0.910	0.465	-0.110	19.42	20.50	1.167	21.4°C

Table 73: Hotspot SAR test results of LTE Band II

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664



7.2.7 SAR measurement Result of LTE Band IV

Test Position of Head	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
QPSK 1RB									
Left Hand Touched	20175/1732 .5	20M QPSK 1RB#50	0.260	0.126	0.030	23.26	23.50	0.275	21.4°C
Left Hand Tilted 15°	20175/1732 .5	20M QPSK 1RB#50	0.262	0.125	0.030	23.26	23.50	0.277	21.4°C
Right Hand Touched	20175/1732 .5	20M QPSK 1RB#50	0.550	0.245	0.020	23.26	23.50	0.581	21.4°C
Right Hand Tilted 15°	20175/1732 .5	20M QPSK 1RB#50	0.543	0.238	0.050	23.26	23.50	0.574	21.4°C
Right Hand Touched	20050/1720	20M QPSK 1RB#50	0.399	0.178	0.060	22.94	23.50	0.454	21.4°C
Right Hand Touched	20300/1745	20M QPSK 1RB#0	0.499	0.223	0.080	23.22	23.50	0.532	21.4°C
QPSK 50%RB									
Left Hand Touched	20175/1732 .5	20M QPSK 50%RB#25	0.268	0.128	0.020	22.26	23.00	0.318	21.4°C
Left Hand Tilted 15°	20175/1732 .5	20M QPSK 50%RB#25	0.251	0.119	0.050	22.26	23.00	0.298	21.4°C
Right Hand Touched	20175/1732 .5	20M QPSK 50%RB#25	0.522	0.233	0.050	22.26	23.00	0.619	21.4°C
Right Hand Tilted 15°	20175/1732 .5	20M QPSK 50%RB#25	0.516	0.226	0.070	22.26	23.00	0.612	21.4°C
Main antenna									
QPSK 1RB									
Left Hand Touched	20175/1732 .5	20M QPSK 1RB#50	0.013	0.077	0.010	23.30	23.50	0.013	21.4°C
Left Hand Tilted 15°	20175/1732 .5	20M QPSK 1RB#50	0.027	0.015	0.080	23.30	23.50	0.028	21.4°C
Right Hand Touched	20175/1732 .5	20M QPSK 1RB#50	0.050	0.032	0.040	23.30	23.50	0.052	21.4°C
Right Hand Tilted 15°	20175/1732 .5	20M QPSK 1RB#50	0.049	0.025	0.160	23.30	23.50	0.051	21.4°C
QPSK 50%RB									
Left Hand Touched	20175/1732 .5	20M QPSK 50%RB#25	0.017	0.009	-0.100	22.29	23.00	0.019	21.4°C
Left Hand Tilted 15°	20175/1732 .5	20M QPSK 50%RB#25	0.027	0.015	-0.140	22.29	23.00	0.032	21.4°C
Right Hand Touched	20175/1732 .5	20M QPSK 50%RB#25	0.050	0.032	-0.040	22.29	23.00	0.059	21.4°C
Right Hand Tilted 15°	20175/1732 .5	20M QPSK 50%RB#25	0.044	0.023	0.190	22.29	23.00	0.052	21.4°C
Tested at the Worst position with battery 2#									
Right Hand Touched	20175/1732 .5	20M QPSK 1RB#50	0.553	0.246	0.050	23.26	23.50	0.584	21.4°C

Table 74: Head SAR test results of LTE Band IV

Test Position of Body-Worn with 15mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
QPSK 1RB									
Front Side	20175/1732.5	20M QPSK 1RB#50	0.083	0.045	0.180	23.26	23.50	0.087	21.4°C
Back Side	20175/1732.5	20M QPSK 1RB#50	0.074	0.041	0.150	23.26	23.50	0.078	21.4°C
QPSK 50%RB									
Front Side	20175/1732.5	20M QPSK 50%RB#25	0.073	0.042	0.060	22.26	23.00	0.087	21.4°C
Back Side	20175/1732.5	20M QPSK 50%RB#25	0.068	0.038	0.040	22.26	23.00	0.081	21.4°C
Main antenna									
QPSK 1RB									
Front Side	20175/1732.5	20M QPSK 1RB#50	0.604	0.345	-0.060	23.30	23.50	0.632	21.4°C
Back Side	20175/1732.5	20M QPSK 1RB#50	0.875	0.486	0.070	23.30	23.50	0.916	21.4°C
Back Side	20050/1720	20M QPSK 1RB#50	1.120	0.619	0.090	22.97	23.50	1.265	21.4°C
Back Side-repeated*	20050/1720	20M QPSK 1RB#50	1.120	0.617	-0.120	22.97	23.50	1.265	21.4°C
Back Side	20300/1745	20M QPSK 1RB#0	0.822	0.453	-0.050	23.26	23.50	0.869	21.4°C
Back Side with Headset	20050/1720	20M QPSK 1RB#50	1.080	0.599	0.130	22.97	23.50	1.220	21.4°C
QPSK 50%RB									
Front Side	20175/1732.5	20M QPSK 50%RB#25	0.619	0.355	0.150	22.29	23.00	0.729	21.4°C
Back Side	20175/1732.5	20M QPSK 50%RB#25	0.848	0.469	0.140	22.29	23.00	0.999	21.4°C
Back Side	20050/1720	20M QPSK 50%RB#50	0.929	0.515	-0.070	22.09	23.00	1.146	21.4°C
Back Side	20300/1745	20M QPSK 50%RB#0	0.746	0.412	0.080	22.27	23.00	0.883	21.4°C
QPSK 100%RB									
Back Side	20175/1732.5	20M QPSK 100%RB#0	0.913	0.502	-0.130	22.31	23.00	1.070	21.4°C
Tested at the Worst position with battery 2#									
Back Side	20050/1720	20M QPSK 1RB#50	0.903	0.503	0.140	22.97	23.50	1.020	21.4°C

Table 75: Body-Worn SAR test results of LTE Band IV

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664



Test Position of Hotspot with 10mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
QPSK 1RB									
Front Side	20175/1732 .5	20M QPSK 1RB#50	0.177	0.088	0.020	18.47	20.00	0.252	21.4°C
Back Side	20175/1732 .5	20M QPSK 1RB#50	0.163	0.083	-0.030	18.47	20.00	0.232	21.4°C
Left Side	20175/1732 .5	20M QPSK 1RB#50	0.027	0.015	0.050	18.47	20.00	0.038	21.4°C
Top Side	20175/1732 .5	20M QPSK 1RB#50	0.262	0.122	0.040	18.47	20.00	0.373	21.4°C
QPSK 50%RB									
Front Side	20175/1732 .5	20M QPSK 50%RB#25	0.165	0.082	0.010	18.28	19.00	0.195	21.4°C
Back Side	20175/1732 .5	20M QPSK 50%RB#25	0.150	0.076	0.150	18.28	19.00	0.177	21.4°C
Left Side	20175/1732 .5	20M QPSK 50%RB#25	0.025	0.013	0.030	18.28	19.00	0.029	21.4°C
Top Side	20175/1732 .5	20M QPSK 50%RB#25	0.269	0.124	-0.190	18.28	19.00	0.318	21.4°C
Main antenna									
QPSK 1RB									
Front Side	20175/1732 .5	20M QPSK 1RB#50	0.359	0.195	0.150	18.51	20.00	0.506	21.4°C
Back Side	20175/1732 .5	20M QPSK 1RB#50	0.564	0.288	-0.120	18.51	20.00	0.795	21.4°C
Left Side	20175/1732 .5	20M QPSK 1RB#50	0.011	0.006	-0.060	18.51	20.00	0.016	21.4°C
Right Side	20175/1732 .5	20M QPSK 1RB#50	0.018	0.010	0.190	18.51	20.00	0.026	21.4°C
Bottom Side	20175/1732 .5	20M QPSK 1RB#50	0.843	0.441	0.090	18.51	20.00	1.188	21.4°C
Bottom Side	20050/1720	20M QPSK 1RB#50	0.769	0.403	0.090	18.45	20.00	1.099	21.4°C
Bottom Side	20300/1745	20M QPSK 1RB#0	0.781	0.408	0.090	18.47	20.00	1.111	21.4°C
QPSK 50%RB									
Front Side	20175/1732 .5	20M QPSK 50%RB#25	0.358	0.195	0.020	18.32	19.00	0.419	21.4°C
Back Side	20175/1732 .5	20M QPSK 50%RB#25	0.545	0.278	0.030	18.32	19.00	0.637	21.4°C
Left Side	20175/1732 .5	20M QPSK 50%RB#25	0.010	0.006	0.050	18.32	19.00	0.012	21.4°C
Right Side	20175/1732 .5	20M QPSK 50%RB#25	0.018	0.010	0.100	18.32	19.00	0.021	21.4°C
Bottom Side	20175/1732 .5	20M QPSK 50%RB#25	0.810	0.422	0.140	18.32	19.00	0.947	21.4°C
Bottom Side	20050/1720	20M QPSK 50%RB#50	1.020	0.534	0.030	18.08	19.00	1.261	21.4°C

Bottom Side-repeated*	20050/1720	20M QPSK 50%RB#50	0.996	0.521	0.100	18.08	19.00	1.231	21.4°C
Bottom Side	20300/1745	20M QPSK 50%RB#0	0.711	0.371	0.090	18.26	19.00	0.843	21.4°C
QPSK 100%RB									
Bottom Side	20050/1720	20M QPSK 100%RB#0	0.726	0.379	0.100	18.40	19.00	0.834	21.4°C
Tested at the Worst position with battery 2#									
Bottom Side	20050/1720	20M QPSK 50%RB#50	0.859	0.448	0.090	18.08	19.00	1.062	21.4°C

Table 76: Hotspot SAR test results of LTE Band IV

Test Position of 10-g Extremity with 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{10-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Bottom Side	20050/1720	20M QPSK 50%RB#50	3.050	1.270	0.140	22.09	23.00	1.566	21.4°C
Tested at the Worst position with battery 2#									
Bottom Side	20050/1720	20M QPSK 50%RB#50	2.380	1.020	0.180	22.09	23.00	1.258	21.4°C

Table 77: 10-g Extremity SAR test results of LTE Band IV

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664

7.2.8 SAR measurement Result of LTE Band V

Test Position of Head	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
QPSK 1RB									
Left Hand Touched	20600/844	10M QPSK 1RB#25	0.191	0.126	-0.010	23.98	24.00	0.192	21.4°C
Left Hand Tilted 15°	20600/844	10M QPSK 1RB#25	0.159	0.098	0.060	23.98	24.00	0.160	21.4°C
Right Hand Touched	20600/844	10M QPSK 1RB#25	0.271	0.158	0.020	23.98	24.00	0.272	21.4°C
Right Hand Tilted 15°	20600/844	10M QPSK 1RB#25	0.251	0.131	0.010	23.98	24.00	0.252	21.4°C
QPSK 50%RB									
Left Hand Touched	20600/844	10M QPSK 50%RB#13	0.183	0.118	0.000	22.72	23.00	0.195	21.4°C
Left Hand Tilted 15°	20600/844	10M QPSK 50%RB#13	0.154	0.093	0.030	22.72	23.00	0.164	21.4°C
Right Hand Touched	20600/844	10M QPSK 50%RB#13	0.273	0.159	0.070	22.72	23.00	0.291	21.4°C
Right Hand Tilted 15°	20600/844	10M QPSK 50%RB#13	0.253	0.132	0.030	22.72	23.00	0.270	21.4°C
Right Hand Touched	20450/829	10M QPSK 50%RB#13	0.327	0.187	0.020	22.26	23.00	0.388	21.4°C
Right Hand Touched	20525/836.5	10M QPSK 50%RB#13	0.563	0.321	0.020	22.49	23.00	0.633	21.4°C
Main antenna									
QPSK 1RB									
Left Hand Touched	20600/844	10M QPSK 1RB#25	0.124	0.096	0.030	23.99	24.00	0.124	21.4°C
Left Hand Tilted 15°	20600/844	10M QPSK 1RB#25	0.071	0.055	0.020	23.99	24.00	0.071	21.4°C
Right Hand Touched	20600/844	10M QPSK 1RB#25	0.128	0.100	-0.050	23.99	24.00	0.128	21.4°C
Right Hand Tilted 15°	20600/844	10M QPSK 1RB#25	0.072	0.057	0.060	23.99	24.00	0.072	21.4°C
QPSK 50%RB									
Left Hand Touched	20600/844	10M QPSK 50%RB#13	0.122	0.093	0.190	22.75	23.00	0.129	21.4°C
Left Hand Tilted 15°	20600/844	10M QPSK 50%RB#13	0.077	0.059	0.190	22.75	23.00	0.081	21.4°C
Right Hand Touched	20600/844	10M QPSK 50%RB#13	0.130	0.098	0.050	22.75	23.00	0.138	21.4°C
Right Hand Tilted 15°	20600/844	10M QPSK 50%RB#13	0.077	0.060	0.190	22.75	23.00	0.082	21.4°C
Tested at the Worst position with battery 2#									
Right Hand Touched	20525/836.5	10M QPSK 50%RB#13	0.584	0.325	-0.150	22.49	23.00	0.657	21.4°C

Table 78: Head SAR test results of LTE Band V

Test Position of Body-Worn with 15mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
QPSK 1RB									
Front Side	20600/844	10M QPSK 1RB#25	0.049	0.038	0.010	23.98	24.00	0.049	21.4°C
Back Side	20600/844	10M QPSK 1RB#25	0.056	0.043	0.170	23.98	24.00	0.056	21.4°C
QPSK 50%RB									
Front Side	20600/844	10M QPSK 50%RB#13	0.048	0.037	0.070	22.72	23.00	0.051	21.4°C
Back Side	20600/844	10M QPSK 50%RB#13	0.054	0.042	0.110	22.72	23.00	0.058	21.4°C
Main antenna									
QPSK 1RB									
Front Side	20600/844	10M QPSK 1RB#25	0.172	0.133	0.010	23.99	24.00	0.172	21.4°C
Back Side	20600/844	10M QPSK 1RB#25	0.266	0.206	-0.040	23.99	24.00	0.267	21.4°C
QPSK 50%RB									
Front Side	20600/844	10M QPSK 50%RB#13	0.139	0.108	-0.040	22.75	23.00	0.147	21.4°C
Back Side	20600/844	10M QPSK 50%RB#13	0.202	0.157	-0.020	22.75	23.00	0.214	21.4°C
Tested at the Worst position with battery 2#									
Back Side	20600/844	10M QPSK 1RB#25	0.257	0.200	-0.030	23.99	24.00	0.258	21.4°C

Table 79: Body-Worn SAR test results of LTE Band V

Test Position of Hotspot with 10mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
QPSK 1RB									
Front Side	20600/844	10M QPSK 1RB#25	0.059	0.040	0.100	23.98	24.00	0.059	21.4°C
Back Side	20600/844	10M QPSK 1RB#25	0.060	0.046	0.100	23.98	24.00	0.061	21.4°C
Left Side	20600/844	10M QPSK 1RB#25	0.067	0.046	0.160	23.98	24.00	0.068	21.4°C
Top Side	20600/844	10M QPSK 1RB#25	0.077	0.048	0.140	23.98	24.00	0.077	21.4°C
QPSK 50%RB									
Front Side	20600/844	10M QPSK 50%RB#13	0.058	0.039	0.070	22.72	23.00	0.062	21.4°C
Back Side	20600/844	10M QPSK 50%RB#13	0.059	0.045	0.110	22.72	23.00	0.063	21.4°C
Left Side	20600/844	10M QPSK 50%RB#13	0.063	0.044	0.040	22.72	23.00	0.068	21.4°C
Top Side	20600/844	10M QPSK 50%RB#13	0.045	0.028	0.160	22.72	23.00	0.048	21.4°C
Main antenna									
QPSK 1RB									
Front Side	20600/844	10M QPSK 1RB#25	0.181	0.140	-0.050	23.99	24.00	0.181	21.4°C
Back Side	20600/844	10M QPSK 1RB#25	0.288	0.224	0.130	23.99	24.00	0.289	21.4°C
Left Side	20600/844	10M QPSK 1RB#25	0.217	0.149	0.030	23.99	24.00	0.218	21.4°C
Right Side	20600/844	10M QPSK 1RB#25	0.246	0.168	-0.010	23.99	24.00	0.247	21.4°C
Bottom Side	20600/844	10M QPSK 1RB#25	0.053	0.028	0.150	23.99	24.00	0.053	21.4°C
QPSK 50%RB									
Front Side	20600/844	10M QPSK 50%RB#13	0.145	0.112	-0.040	22.75	23.00	0.154	21.4°C
Back Side	20600/844	10M QPSK 50%RB#13	0.220	0.171	0.010	22.75	23.00	0.233	21.4°C
Left Side	20600/844	10M QPSK 50%RB#13	0.166	0.114	0.050	22.75	23.00	0.176	21.4°C
Right Side	20600/844	10M QPSK 50%RB#13	0.214	0.146	0.030	22.75	23.00	0.227	21.4°C
Bottom Side	20600/844	10M QPSK 50%RB#13	0.038	0.020	0.190	22.75	23.00	0.040	21.4°C
Tested at the Worst position with battery 2#									
Back Side	20600/844	10M QPSK 1RB#25	0.284	0.223	-0.010	23.99	24.00	0.285	21.4°C

Table 80: Hotspot SAR test results of LTE Band V

7.2.9 SAR measurement Result of LTE Band VII

Test Position of Head	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
QPSK 1RB									
Left Hand Touched	21100/2535	20M QPSK 1RB#50	0.303	0.126	-0.010	22.43	22.50	0.308	21.4°C
Left Hand Tilted 15°	21100/2535	20M QPSK 1RB#50	0.295	0.124	-0.010	22.43	22.50	0.300	21.4°C
Right Hand Touched	21100/2535	20M QPSK 1RB#50	0.645	0.235	0.090	22.43	22.50	0.655	21.4°C
Right Hand Tilted 15°	21100/2535	20M QPSK 1RB#50	0.766	0.282	0.090	22.43	22.50	0.778	21.4°C
Right Hand Tilted 15°	20850/2510	20M QPSK 1RB#50	0.419	0.152	0.090	21.69	22.50	0.505	21.4°C
Right Hand Tilted 15°	21350/2560	20M QPSK 1RB#50	0.626	0.230	0.070	22.08	22.50	0.690	21.4°C
QPSK 50%RB									
Left Hand Touched	21100/2535	20M QPSK 50%RB#0	0.231	0.096	0.100	21.82	22.50	0.270	21.4°C
Left Hand Tilted 15°	21100/2535	20M QPSK 50%RB#0	0.232	0.097	-0.140	21.82	22.50	0.271	21.4°C
Right Hand Touched	21100/2535	20M QPSK 50%RB#0	0.525	0.186	0.080	21.82	22.50	0.614	21.4°C
Right Hand Tilted 15°	21100/2535	20M QPSK 50%RB#0	0.638	0.232	0.040	21.82	22.50	0.746	21.4°C
QPSK 100%RB									
Right Hand Tilted 15°	21100/2535	20M QPSK 100%RB#0	0.619	0.227	-0.010	21.67	22.50	0.749	21.4°C
Main antenna									
QPSK 1RB									
Left Hand Touched	21100/2535	20M QPSK 1RB#50	0.028	0.011	-0.150	22.46	22.50	0.029	21.4°C
Left Hand Tilted 15°	21100/2535	20M QPSK 1RB#50	0.014	0.005	0.110	22.46	22.50	0.015	21.4°C
Right Hand Touched	21100/2535	20M QPSK 1RB#50	0.073	0.039	0.130	22.46	22.50	0.074	21.4°C
Right Hand Tilted 15°	21100/2535	20M QPSK 1RB#50	0.016	0.004	0.067	22.46	22.50	0.016	21.4°C
QPSK 50%RB									
Left Hand Touched	21100/2535	20M QPSK 50%RB#0	0.025	0.013	0.080	21.87	22.50	0.029	21.4°C
Left Hand Tilted 15°	21100/2535	20M QPSK 50%RB#0	0.015	0.006	0.140	21.87	22.50	0.017	21.4°C
Right Hand Touched	21100/2535	20M QPSK 50%RB#0	0.062	0.033	0.000	21.87	22.50	0.071	21.4°C
Right Hand Tilted 15°	21100/2535	20M QPSK 50%RB#0	0.015	0.004	0.130	21.87	22.50	0.017	21.4°C
Tested at the Worst position with battery 2#									
Right Hand Tilted 15°	21100/2535	20M QPSK 1RB#50	0.611	0.226	-0.070	22.43	22.50	0.621	21.4°C

Table 81: Head SAR test results of LTE Band VII

Test Position of Body-Worn with 15mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
QPSK 1RB									
Front Side	21100/2535	20M QPSK 1RB#50	0.034	0.016	-0.020	22.43	22.50	0.034	21.4°C
Back Side	21100/2535	20M QPSK 1RB#50	0.040	0.019	0.050	22.43	22.50	0.040	21.4°C
QPSK 50%RB									
Front Side	21100/2535	20M QPSK 50%RB#0	0.027	0.013	0.040	21.82	22.50	0.032	21.4°C
Back Side	21100/2535	20M QPSK 50%RB#0	0.031	0.015	0.070	21.82	22.50	0.037	21.4°C
Main antenna									
QPSK 1RB									
Front Side	21100/2535	20M QPSK 1RB#50	0.202	0.107	0.020	22.46	22.50	0.204	21.4°C
Back Side	21100/2535	20M QPSK 1RB#50	0.253	0.133	-0.180	22.46	22.50	0.255	21.4°C
QPSK 50%RB									
Front Side	21100/2535	20M QPSK 50%RB#0	0.172	0.091	-0.010	21.87	22.50	0.199	21.4°C
Back Side	21100/2535	20M QPSK 50%RB#0	0.216	0.113	0.050	21.87	22.50	0.250	21.4°C
Tested at the Worst position with battery 2#									
Back Side	21100/2535	20M QPSK 1RB#50	0.384	0.202	0.050	22.46	22.50	0.388	21.4°C

Table 82: Body-Worn SAR test results of LTE Band VII

Test Position of Hotspot with 10mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Secondary antenna									
QPSK 1RB									
Front Side	21100/2535	20M QPSK 1RB#50	0.082	0.030	0.190	21.41	21.50	0.084	21.4°C
Back Side	21100/2535	20M QPSK 1RB#50	0.108	0.046	0.070	21.41	21.50	0.110	21.4°C
Left Side	21100/2535	20M QPSK 1RB#50	0.008	0.004	-0.060	21.41	21.50	0.009	21.4°C
Top Side	21100/2535	20M QPSK 1RB#50	0.169	0.070	-0.100	21.41	21.50	0.173	21.4°C
QPSK 50%RB									
Front Side	21100/2535	20M QPSK 50%RB#0	0.065	0.029	0.170	21.31	21.50	0.068	21.4°C
Back Side	21100/2535	20M QPSK 50%RB#0	0.097	0.041	0.040	21.31	21.50	0.102	21.4°C
Left Side	21100/2535	20M QPSK 50%RB#0	0.009	0.004	0.080	21.31	21.50	0.009	21.4°C
Top Side	21100/2535	20M QPSK 50%RB#0	0.160	0.066	0.110	21.31	21.50	0.167	21.4°C
Main antenna									
QPSK 1RB									
Front Side	21100/2535	20M QPSK 1RB#50	0.340	0.169	-0.130	21.47	21.50	0.342	21.4°C
Back Side	21100/2535	20M QPSK 1RB#50	0.420	0.206	-0.090	21.47	21.50	0.423	21.4°C
Left Side	21100/2535	20M QPSK 1RB#50	0.017	0.007	-0.180	21.47	21.50	0.017	21.4°C
Right Side	21100/2535	20M QPSK 1RB#50	0.087	0.042	0.080	21.47	21.50	0.088	21.4°C
Bottom Side	21100/2535	20M QPSK 1RB#50	0.773	0.367	-0.150	21.47	21.50	0.778	21.4°C
Bottom Side	20850/2510	20M QPSK 1RB#50	0.780	0.379	0.010	21.05	21.50	0.865	21.4°C
Bottom Side	21350/2560	20M QPSK 1RB#50	1.080	0.511	0.010	21.35	21.50	1.118	21.4°C
Bottom Side-repeated*	21350/2560	20M QPSK 1RB#50	1.020	0.500	0.170	21.35	21.50	1.056	21.4°C
QPSK 50%RB									
Front Side	21100/2535	20M QPSK 50%RB#0	0.313	0.154	0.070	21.35	21.50	0.324	21.4°C
Back Side	21100/2535	20M QPSK 50%RB#0	0.379	0.186	0.020	21.35	21.50	0.392	21.4°C
Left Side	21100/2535	20M QPSK 50%RB#0	0.013	0.005	-0.080	21.35	21.50	0.013	21.4°C
Right Side	21100/2535	20M QPSK 50%RB#0	0.083	0.039	0.150	21.35	21.50	0.086	21.4°C
Bottom Side	21100/2535	20M QPSK 50%RB#0	1.020	0.508	0.100	21.35	21.50	1.056	21.4°C



Bottom Side	20850/2510	20M QPSK 50%RB#0	0.841	0.408	0.150	20.93	21.50	0.959	21.4°C
Bottom Side	21350/2560	20M QPSK 50%RB#0	0.621	0.285	0.110	21.34	21.50	0.644	21.4°C
QPSK 100%RB									
Bottom Side	21100/2535	20M QPSK 100RB#0	0.774	0.367	0.190	21.30	21.50	0.810	21.4°C
Tested at the Worst position with battery 2#									
Bottom Side	21350/2560	20M QPSK 1RB#50	0.719	0.333	0.190	21.35	21.50	0.744	21.4°C

Table 83: Hotspot SAR test results of LTE Band VII

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664

7.2.10 SAR measurement Result of WiFi 2.4G

Test Position of Head	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Left Hand Touched	1/2412	802.11 b	0.596	0.272	0.040	14.66	16.00	0.811	21.4°C
Left Hand Touched	6/2437	802.11 b	0.745	0.337	0.100	15.25	16.00	0.885	21.4°C
Left Hand Touched	11/2462	802.11 b	0.553	0.248	0.040	14.89	16.00	0.714	21.4°C
Left Hand Tilted 15°	6/2437	802.11 b	0.481	0.212	0.030	15.25	16.00	0.572	21.4°C
Right Hand Touched	6/2437	802.11 b	0.270	0.141	0.050	15.25	16.00	0.321	21.4°C
Right Hand Tilted 15°	6/2437	802.11 b	0.286	0.143	0.080	15.25	16.00	0.340	21.4°C
Tested at the Worst position with battery 2#									
Left Hand Touched	6/2437	802.11 b	0.718	0.329	0.050	15.25	16.00	0.853	21.4°C

Table 84: Head SAR test results of WiFi 2450MHz

Test Position of Body-Worn with 15mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Front Side	6/2437	802.11 b	0.045	0.024	-0.030	15.25	16.00	0.053	21.4°C
Back Side	6/2437	802.11 b	0.035	0.019	0.000	15.25	16.00	0.041	21.4°C
Tested at the Worst position with battery 2#									
Front Side	6/2437	802.11 b	0.056	0.031	-0.170	15.25	16.00	0.067	21.4°C

Table 85: Body-Worn SAR test results of WiFi 2450MHz

Test Position of Hotspot with 10mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Front Side	6/2437	802.11 b	0.097	0.052	0.010	15.25	16.00	0.115	21.4°C
Back Side	6/2437	802.11 b	0.073	0.040	-0.120	15.25	16.00	0.087	21.4°C
Top Side	6/2437	802.11 b	0.095	0.052	-0.080	15.25	16.00	0.113	21.4°C
Right Side	6/2437	802.11 b	0.067	0.034	-0.130	15.25	16.00	0.080	21.4°C
Tested at the Worst position with battery 2#									
Front Side	6/2437	802.11 b	0.105	0.057	-0.040	15.25	16.00	0.125	21.4°C

Table 86: Hotspot SAR test results of WiFi 2450MHz

7.2.11 SAR measurement Result of WiFi 5G

Test Position of Head	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Test data of 5.2GHz band									
Left Hand Touched	40/5200	802.11a	0.206	0.058	0.130	14.53	15.00	0.230	21.6°C
Left Hand Tilted 15°	40/5200	802.11a	0.237	0.656	0.100	14.53	15.00	0.264	21.6°C
Right Hand Touched	40/5200	802.11a	0.198	0.062	0.110	14.53	15.00	0.221	21.6°C
Right Hand Tilted 15°	40/5200	802.11a	0.224	0.069	0.110	14.53	15.00	0.250	21.6°C
Test data of 5.3GHz band									
Left Hand Touched	52/5260	802.11a	0.268	0.076	0.070	14.42	15.00	0.306	21.6°C
Left Hand Tilted 15°	52/5260	802.11a	0.302	0.083	0.140	14.42	15.00	0.345	21.6°C
Right Hand Touched	52/5260	802.11a	0.240	0.072	0.130	14.42	15.00	0.274	21.6°C
Right Hand Tilted 15°	52/5260	802.11a	0.296	0.086	0.080	14.42	15.00	0.338	21.6°C
Test data of 5.6GHz band									
Left Hand Touched	112/5560	802.11a	0.451	0.135	-0.040	14.82	15.00	0.470	21.6°C
Left Hand Tilted 15°	112/5560	802.11a	0.449	0.128	0.050	14.82	15.00	0.468	21.6°C
Right Hand Touched	112/5560	802.11a	0.415	0.112	0.000	14.82	15.00	0.433	21.6°C
Right Hand Tilted 15°	112/5560	802.11a	0.486	0.128	0.060	14.82	15.00	0.507	21.6°C
Test data of 5.8GHz band									
Left Hand Touched	161/5805	802.11a	0.439	0.133	-0.050	13.80	15.00	0.579	21.6°C
Left Hand Tilted 15°	161/5805	802.11a	0.443	0.133	0.120	13.80	15.00	0.584	21.6°C
Right Hand Touched	161/5805	802.11a	0.471	0.128	0.030	13.80	15.00	0.621	21.6°C
Right Hand Tilted 15°	161/5805	802.11a	0.441	0.129	0.090	13.80	15.00	0.581	21.6°C
Right Hand Touched	149/5745	802.11a	0.471	0.134	0.000	13.79	15.00	0.622	21.6°C
Right Hand Touched	153/5765	802.11a	0.380	0.112	0.040	13.58	15.00	0.527	21.6°C
Right Hand Touched	157/5785	802.11a	0.470	0.128	0.030	13.68	15.00	0.637	21.6°C
Right Hand Touched	165/5825	802.11a	0.398	0.118	0.040	13.56	15.00	0.554	21.6°C
Tested at the Worst position with battery 2#									
Right Hand Touched	157/5785	802.11a	0.495	0.139	-0.020	13.68	15.00	0.671	21.6°C

Table 87: Head SAR test results of WiFi 5G

Test Position of Body-Worn with 15mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Test data of 5.2G band									
Front Side	40/5200	802.11a	0.011	0.004	0.090	14.53	15.00	0.012	21.6°C
Back Side	40/5200	802.11a	0.033	0.012	0.080	14.53	15.00	0.037	21.6°C
Test data of 5.3GHz band									
Front Side	52/5260	802.11a	0.009	0.003	0.000	14.42	15.00	0.010	21.6°C
Back Side	52/5260	802.11a	0.018	0.006	0.000	14.42	15.00	0.021	21.6°C
Test data of 5.6GHz band									
Front Side	112/5560	802.11a	0.017	0.006	0.160	14.82	15.00	0.018	21.6°C
Back Side	112/5560	802.11a	0.059	0.022	0.160	14.82	15.00	0.061	21.6°C
Test data of 5.8GHz band									
Front Side	161/5805	802.11a	0.018	0.007	-0.140	13.80	15.00	0.023	21.6°C
Back Side	161/5805	802.11a	0.038	0.015	0.150	13.80	15.00	0.050	21.6°C
Tested at the Worst position with battery 2#									
Back Side	112/5560	802.11a	0.059	0.023	0.090	14.82	15.00	0.061	21.6°C


Table 88: Body-Worn SAR test results of WiFi 5G

Test Position of 10-g Extremity with 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{10-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Test data of 5.2G band									
Front Side	40/5200	802.11a	0.175	0.040	0.090	14.53	15.00	0.045	21.6°C
Back Side	40/5200	802.11a	0.321	0.071	-0.070	14.53	15.00	0.079	21.6°C
Top Side	40/5200	802.11a	0.239	0.054	0.190	14.53	15.00	0.060	21.6°C
Test data of 5.3GHz band									
Front Side	52/5260	802.11a	0.268	0.061	0.000	14.42	15.00	0.070	21.6°C
Back Side	52/5260	802.11a	0.429	0.099	0.000	14.42	15.00	0.114	21.6°C
Top Side	52/5260	802.11a	0.360	0.083	0.130	14.42	15.00	0.095	21.6°C
Test data of 5.6GHz band									
Front Side	112/5560	802.11a	0.720	0.185	0.010	14.82	15.00	0.193	21.6°C
Back Side	112/5560	802.11a	1.200	0.322	0.000	14.82	15.00	0.336	21.6°C
Top Side	112/5560	802.11a	1.030	0.257	0.070	14.82	15.00	0.268	21.6°C
Test data of 5.8GHz band									
Front Side	161/5805	802.11a	0.671	0.180	-0.190	13.80	15.00	0.237	21.6°C
Back Side	161/5805	802.11a	0.708	0.204	0.150	13.80	15.00	0.269	21.6°C
Top Side	161/5805	802.11a	0.669	0.163	0.030	13.80	15.00	0.215	21.6°C
Tested at the Worst position with battery 2#									
Back Side	112/5560	802.11a	1.040	0.279	0.000	14.82	15.00	0.291	21.6°C

Table 89: Test results 10-g Extremity SAR of WiFi 5G

7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v05r02. The location of the antennas inside mobile phone is shown as below picture:

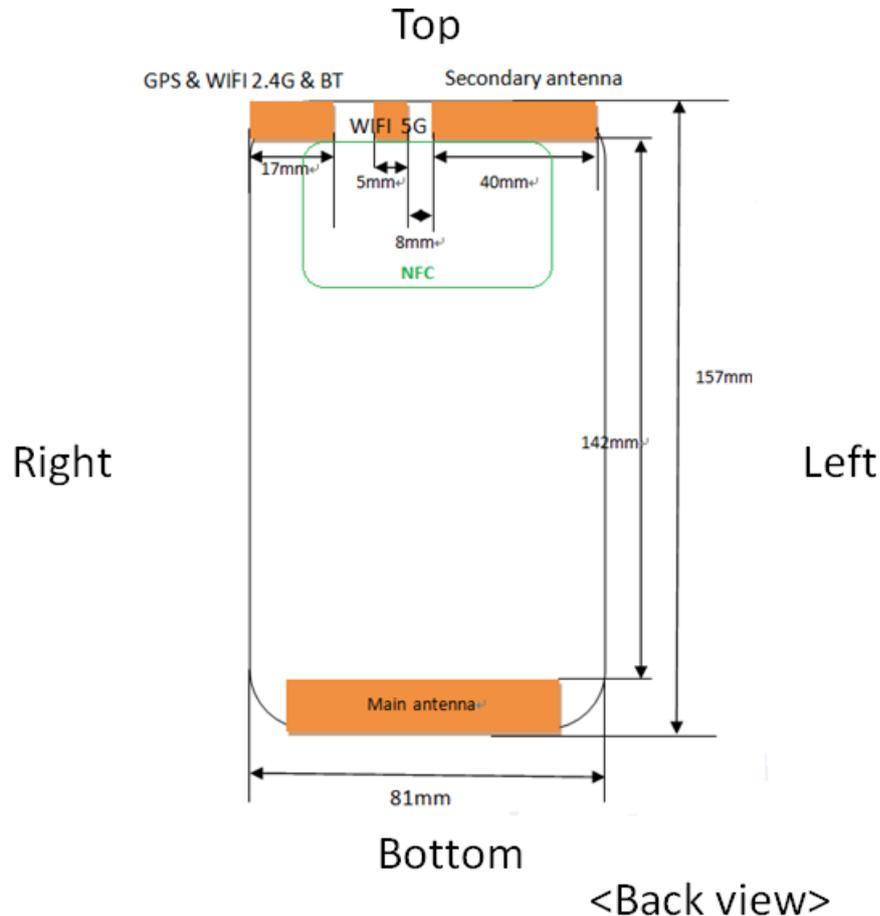

Note:

- 1) Main antenna and Secondary antenna can't transmit simultaneously, it will be chosen based on the RSSI. Only one antenna can be used for 2G/3G/4G transmission at a time.
- 2) Both WiFi antennas are designed. One is for 2.4G WIFI TX/RX, the other one is for 5G WIFI TX/RX. They can't transmit simultaneously.
- 3) The NFC antenna is integrated onto the Back cover. The SAR tests were performed with the Battery cover. Per KDB 648474 D04 Phones with built-in NFC functions do not require separate SAR testing and can generally be tested according to the SAR measurement procedures normally required for the phone. Influences of the hardware introduced by the built-in NFC functions are inherently considered through testing of the other transmitters that require SAR.
- 4) The overall dimension of the device (Length* Width) is 157mm*81mm . Per KDB 648474 D04, because the diagonal distance of this device is > 160mm, it is considered a "Phablet" device.

Mode	Exposure Condition	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
Main antenna	Hotspot/Extremity*	Yes	Yes	Yes	Yes	No	Yes
Secondary antenna	Hotspot/Extremity*	Yes	Yes	Yes	No	Yes	No
WiFi 2.4G antenna	Hotspot/Extremity*	Yes	Yes	No	Yes	Yes	No
WiFi 5G antenna	Extremity**	Yes	Yes	No	No	Yes	No

Table 90: Sides for SAR testing

Note:

- 1) Per KDB 941225 D06 and KDB 648474 D04, particular DUT edges were not required to be evaluated for Hotspot and/or Extremity SAR if the antenna-to-edge distance is greater than 2.5cm.
- 2)*- Per KDB 648474 D04, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg;
- 3) **- WiFi 5G does not support Hotspot function.

7.3.1 Stand-alone SAR test exclusion

Per FCC KDB 447498D01v05, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
BT	Body-Worn	7.00	5.01	15	2.450	0.52	3.00	Yes
BT	10-g Extremity	7.00	5.01	5	2.450	1.57	7.50	Yes

Table 91: Standalone SAR test exclusion for BT

Note:

- 1)* - maximum possible output power declared by manufacturer
- 2) Held to ear configurations are not applicable to Bluetooth for this device.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	X	Estimated SAR (W/Kg)*
BT	Body-worn	7.00	5.01	15	2.450	7.5	0.070
BT	10-g Extremity	7.00	5.01	5	2.450	18.75	0.084

Table 92: Estimated SAR calculation for BT

Note:

- 1) * - maximum possible output power declared by manufacturer
- 2) Held to ear configurations are not applicable to Bluetooth and therefore were not considered for simultaneous transmission.

7.3.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Head	Body-worn	Hotspot	10-g extremity
1	GSM (Voice) + WiFi 2.4G	Yes	Yes	N/A	Yes
2	GPRS/EDGE (DATA) + WiFi 2.4G	N/A	N/A	Yes	Yes
3	GSM (Voice) + WiFi 5G	Yes	Yes	N/A	Yes
4	GPRS/EDGE (DATA) + WiFi 5G	N/A	N/A	N/A	Yes
5	GSM (Voice) +BT	N/A	Yes	N/A	Yes
6	GPRS/EDGE (DATA) + BT	N/A	N/A	N/A	Yes
7	UMTS (Voice) + WiFi 2.4G	Yes	Yes	N/A	Yes
8	UMTS (DATA) + WiFi 2.4G	N/A	Yes	Yes	Yes
9	UMTS (Voice) + WiFi 5G	Yes	Yes	N/A	Yes
10	UMTS (DATA) + WiFi 5G	N/A	Yes	N/A	Yes
11	UMTS (Voice)+BT	N/A	Yes	N/A	Yes
12	UMTS (DATA) +BT	N/A	Yes	N/A	Yes
13	LTE (DATA) + WiFi 2.4G	Yes*	Yes*	Yes	Yes
14	LTE (DATA) + WiFi 5G	Yes*	Yes*	N/A	Yes
15	LTE (DATA) + BT	N/A	Yes*	N/A	Yes

Table 93: Simultaneous Transmission Possibilities

Note:

- 1) Wi-Fi 2.4G and Bluetooth share the same Tx antenna and can't transmit simultaneously.
- 2) Wi-Fi 2.4G/BT and WiFi 5G can't transmit simultaneously.
- 3) 2G&3G&4G can't transmit simultaneously.
- 4) WiFi 5G does not support hotspot function, therefore all WiFi 5G bands were not evaluated for hotspot conditions
- 4) The device does not support DTM function.
- 5) Held to ear configurations are not applicable to Bluetooth and therefore were not considered for simultaneous transmission.
- 6) * VOIP 3rd party applications may possibly be installed and used by the end user.

7.3.3 SAR Summation Scenario

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		GSM850	WiFi 2.4G			
Head	Left Hand Touched	0.436	0.885	1.321	NA	NA
	Left Hand Tilted 15°	0.370	0.572	0.942	NA	NA
	Right Hand Touched	0.636	0.321	0.957	NA	NA
	Right Hand Tilted 15°	0.572	0.340	0.912	NA	NA
Body-Worn	Front Side	0.117	0.067	0.184	NA	NA
	Back Side	0.169	0.041	0.210	NA	NA
Hotspot	Front Side	0.190	0.125	0.315	NA	NA
	Back Side	0.272	0.087	0.359	NA	NA
	Left Side	0.191	/	0.191	NA	NA
	Right Side	0.217	0.080	0.297	NA	NA
	Top Side	0.191	0.113	0.304	NA	NA
	Bottom Side	0.053	/	0.053	NA	NA

Table 94: Simultaneous Tx Combination of GSM850 and WiFi 2.4G.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		GSM1900	WiFi 2.4G			
Head	Left Hand Touched	0.179	0.885	1.064	NA	NA
	Left Hand Tilted 15°	0.179	0.572	0.751	NA	NA
	Right Hand Touched	0.656	0.321	0.977	NA	NA
	Right Hand Tilted 15°	0.448	0.340	0.788	NA	NA
Body-Worn	Front Side	0.198	0.067	0.265	NA	NA
	Back Side	0.321	0.041	0.363	NA	NA
Hotspot	Front Side	0.295	0.125	0.420	NA	NA
	Back Side	0.436	0.087	0.523	NA	NA
	Left Side	0.039	/	0.039	NA	NA
	Right Side	0.064	0.080	0.144	NA	NA
	Top Side	0.240	0.113	0.354	NA	NA
	Bottom Side	0.724	/	0.724	NA	NA

Table 95: Simultaneous Tx Combination of GSM1900 and WiFi 2.4G.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		UMTS Band V	WiFi 2.4G			
Head	Left Hand Touched	0.364	0.885	1.249	NA	NA
	Left Hand Tilted 15°	0.308	0.572	0.880	NA	NA
	Right Hand Touched	0.649	0.321	0.970	NA	NA
	Right Hand Tilted 15°	0.464	0.340	0.804	NA	NA
Body-Worn	Front Side	0.139	0.067	0.206	NA	NA
	Back Side	0.201	0.041	0.243	NA	NA
Hotspot	Front Side	0.147	0.125	0.272	NA	NA
	Back Side	0.232	0.087	0.319	NA	NA
	Left Side	0.223	/	0.223	NA	NA
	Right Side	0.228	0.080	0.308	NA	NA
	Top Side	0.002	0.113	0.115	NA	NA
	Bottom Side	0.040	/	0.040	NA	NA

Table 96: Simultaneous Tx Combination of UMTS Band V and WiFi 2.4G.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		UMTS Band IV	WiFi 2.4G			
Head	Left Hand Touched	0.217	0.885	1.102	NA	NA
	Left Hand Tilted 15°	0.235	0.572	0.807	NA	NA
	Right Hand Touched	0.364	0.321	0.685	NA	NA
	Right Hand Tilted 15°	0.308	0.340	0.648	NA	NA
Body-Worn	Front Side	0.577	0.067	0.644	NA	NA
	Back Side	1.004	0.041	1.045	NA	NA
Hotspot	Front Side	0.578	0.125	0.703	NA	NA
	Back Side	0.811	0.087	0.898	NA	NA
	Left Side	0.016	/	0.016	NA	NA
	Right Side	0.033	0.080	0.113	NA	NA
	Top Side	0.205	0.113	0.318	NA	NA
	Bottom Side	1.094	/	1.094	NA	NA

Table 97: Simultaneous Tx Combination of UMTS Band IV and WiFi 2.4G.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		UMTS Band II	WiFi 2.4G			
Head	Left Hand Touched	0.240	0.885	1.125	NA	NA
	Left Hand Tilted 15°	0.246	0.572	0.817	NA	NA
	Right Hand Touched	0.655	0.321	0.975	NA	NA
	Right Hand Tilted 15°	0.540	0.340	0.880	NA	NA
Body-Worn	Front Side	0.473	0.067	0.540	NA	NA
	Back Side	0.668	0.041	0.709	NA	NA
Hotspot	Front Side	0.374	0.125	0.499	NA	NA
	Back Side	0.595	0.087	0.682	NA	NA
	Left Side	0.045	/	0.045	NA	NA
	Right Side	0.072	0.080	0.152	NA	NA
	Top Side	0.187	0.113	0.300	NA	NA
	Bottom Side	0.974	/	0.974	NA	NA

Table 98: Simultaneous Tx Combination of UMTS Band II and WiFi 2.4G.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		LTE Band II	WiFi 2.4G			
Head	Left Hand Touched	0.345	0.885	1.230	NA	NA
	Left Hand Tilted 15°	0.345	0.572	0.916	NA	NA
	Right Hand Touched	0.908	0.321	1.229	NA	NA
	Right Hand Tilted 15°	0.712	0.340	1.052	NA	NA
Body-Worn	Front Side	0.317	0.067	0.384	NA	NA
	Back Side	0.524	0.041	0.565	NA	NA
Hotspot	Front Side	0.402	0.125	0.527	NA	NA
	Back Side	0.597	0.087	0.684	NA	NA
	Left Side	0.083	/	0.083	NA	NA
	Right Side	0.115	0.080	0.195	NA	NA
	Top Side	0.221	0.113	0.334	NA	NA
	Bottom Side	1.189	/	1.189	NA	NA

Table 99: Simultaneous Tx Combination LTE Band II and WiFi 2.4G.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		LTE Band IV	WiFi 2.4G			
Head	Left Hand Touched	0.275	0.885	1.160	NA	NA
	Left Hand Tilted 15°	0.277	0.572	0.849	NA	NA
	Right Hand Touched	0.584	0.321	0.905	NA	NA
	Right Hand Tilted 15°	0.574	0.340	0.914	NA	NA
Body-Worn	Front Side	0.632	0.067	0.699	NA	NA
	Back Side	1.265	0.041	1.307	NA	NA
Hotspot	Front Side	0.506	0.125	0.631	NA	NA
	Back Side	0.795	0.087	0.882	NA	NA
	Left Side	0.016	/	0.016	NA	NA
	Right Side	0.026	0.080	0.106	NA	NA
	Top Side	0.373	0.113	0.486	NA	NA
	Bottom Side	1.261	/	1.261	NA	NA

Table 100: Simultaneous Tx Combination LTE Band IV and WiFi 2.4G.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		LTE Band V	WiFi 2.4G			
Head	Left Hand Touched	0.195	0.885	1.080	NA	NA
	Left Hand Tilted 15°	0.164	0.572	0.736	NA	NA
	Right Hand Touched	0.657	0.321	0.978	NA	NA
	Right Hand Tilted 15°	0.270	0.340	0.610	NA	NA
Body-Worn	Front Side	0.172	0.067	0.239	NA	NA
	Back Side	0.267	0.041	0.308	NA	NA
Hotspot	Front Side	0.181	0.125	0.306	NA	NA
	Back Side	0.289	0.087	0.376	NA	NA
	Left Side	0.218	/	0.218	NA	NA
	Right Side	0.247	0.080	0.327	NA	NA
	Top Side	0.077	0.113	0.190	NA	NA
	Bottom Side	0.053	/	0.053	NA	NA

Table 101: Simultaneous Tx Combination LTE Band V and WiFi 2.4G.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		LTE Band VII	WiFi 2.4G			
Head	Left Hand Touched	0.308	0.885	1.193	NA	NA
	Left Hand Tilted 15°	0.300	0.572	0.871	NA	NA
	Right Hand Touched	0.655	0.321	0.976	NA	NA
	Right Hand Tilted 15°	0.778	0.340	1.118	NA	NA
Body-Worn	Front Side	0.204	0.067	0.271	NA	NA
	Back Side	0.388	0.041	0.429	NA	NA
Hotspot	Front Side	0.342	0.125	0.467	NA	NA
	Back Side	0.423	0.087	0.510	NA	NA
	Left Side	0.017	/	0.017	NA	NA
	Right Side	0.088	0.080	0.168	NA	NA
	Top Side	0.173	0.113	0.286	NA	NA
	Bottom Side	1.118	/	1.118	NA	NA

Table 102: Simultaneous Tx Combination LTE Band VII and WiFi 2.4G.

Test Position		Scaled SAR _{Max}		Σ 1-g SAR (W/kg)	SPLSR	Remark
		GSM850	WiFi 5G			
Head	Left Hand Touched	0.436	0.579	1.015	NA	NA
	Left Hand Tilted 15°	0.370	0.584	0.954	NA	NA
	Right Hand Touched	0.636	0.671	1.306	NA	NA
	Right Hand Tilted 15°	0.572	0.581	1.153	NA	NA
Body-Worn	Front Side	0.117	0.023	0.140	NA	NA
	Back Side	0.169	0.061	0.230	NA	NA

Table 103: Simultaneous Tx Combination of GSM850 and WiFi 5G.

Test Position		Scaled SAR _{Max}		Σ 1-g SAR (W/kg)	SPLSR	Remark
		GSM1900	WiFi 5G			
Head	Left Hand Touched	0.179	0.579	0.758	NA	NA
	Left Hand Tilted 15°	0.179	0.584	0.763	NA	NA
	Right Hand Touched	0.656	0.671	1.327	NA	NA
	Right Hand Tilted 15°	0.448	0.581	1.029	NA	NA
Body-Worn	Front Side	0.198	0.023	0.221	NA	NA
	Back Side	0.321	0.061	0.382	NA	NA

Table 104: Simultaneous Tx Combination of GSM1900 and WiFi 5G.

Test Position		Scaled SAR _{Max}		Σ 1-g SAR (W/kg)	SPLSR	Remark
		UMTS Band V	WiFi 5G			
Head	Left Hand Touched	0.364	0.579	0.942	NA	NA
	Left Hand Tilted 15°	0.308	0.584	0.892	NA	NA
	Right Hand Touched	0.649	0.671	1.320	NA	NA
	Right Hand Tilted 15°	0.464	0.581	1.045	NA	NA
Body-Worn	Front Side	0.139	0.023	0.162	NA	NA
	Back Side	0.201	0.061	0.262	NA	NA

Table 105: Simultaneous Tx Combination of UMTS Band V and WiFi 5G.

Test Position		Scaled SAR _{Max}		Σ 1-g SAR (W/kg)	SPLSR	Remark
		UMTS Band IV	WiFi 5G			
Head	Left Hand Touched	0.217	0.579	0.796	NA	NA
	Left Hand Tilted 15°	0.235	0.584	0.819	NA	NA
	Right Hand Touched	0.364	0.671	1.035	NA	NA
	Right Hand Tilted 15°	0.308	0.581	0.889	NA	NA
Body-Worn	Front Side	0.577	0.023	0.600	NA	NA
	Back Side	1.004	0.061	1.065	NA	NA

Table 106: Simultaneous Tx Combination of UMTS Band IV and WiFi 5G.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		UMTS Band II	WiFi 5G			
Head	Left Hand Touched	0.240	0.579	0.819	NA	NA
	Left Hand Tilted 15°	0.246	0.584	0.830	NA	NA
	Right Hand Touched	0.655	0.671	1.325	NA	NA
	Right Hand Tilted 15°	0.540	0.581	1.122	NA	NA
Body-Worn	Front Side	0.473	0.023	0.496	NA	NA
	Back Side	0.668	0.061	0.729	NA	NA

Table 107: Simultaneous Tx Combination of UMTS Band II and WiFi 5G.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		LTE Band II	WiFi 5G			
Head	Left Hand Touched	0.345	0.579	0.923	NA	NA
	Left Hand Tilted 15°	0.345	0.584	0.929	NA	NA
	Right Hand Touched	0.908	0.671	1.579	NA	NA
	Right Hand Tilted 15°	0.712	0.581	1.293	NA	NA
Body-Worn	Front Side	0.317	0.023	0.340	NA	NA
	Back Side	0.524	0.061	0.585	NA	NA

Table 108: Simultaneous Tx Combination LTE Band II and WiFi 5G.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		LTE Band IV	WiFi 5G			
Head	Left Hand Touched	0.275	0.579	0.853	NA	NA
	Left Hand Tilted 15°	0.277	0.584	0.861	NA	NA
	Right Hand Touched	0.584	0.671	1.255	NA	NA
	Right Hand Tilted 15°	0.574	0.581	1.155	NA	NA
Body-Worn	Front Side	0.632	0.023	0.655	NA	NA
	Back Side	1.265	0.061	1.326	NA	NA

Table 109: Simultaneous Tx Combination LTE Band IV and WiFi 5G.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		LTE Band V	WiFi 5G			
Head	Left Hand Touched	0.195	0.579	0.774	NA	NA
	Left Hand Tilted 15°	0.164	0.584	0.748	NA	NA
	Right Hand Touched	0.657	0.671	1.328	NA	NA
	Right Hand Tilted 15°	0.270	0.581	0.851	NA	NA
Body-Worn	Front Side	0.172	0.023	0.195	NA	NA
	Back Side	0.267	0.061	0.328	NA	NA

Table 110: Simultaneous Tx Combination LTE Band V and WiFi 5G.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		LTE Band VII	WiFi 5G			
Head	Left Hand Touched	0.308	0.579	0.887	NA	NA
	Left Hand Tilted 15°	0.300	0.584	0.884	NA	NA
	Right Hand Touched	0.655	0.671	1.326	NA	NA
	Right Hand Tilted 15°	0.778	0.581	1.360	NA	NA
Body-Worn	Front Side	0.204	0.023	0.227	NA	NA
	Back Side	0.388	0.061	0.449	NA	NA

Table 111: Simultaneous Tx Combination LTE Band VII and WiFi 5G.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		GSM850	BT			
Body-Worn	Front Side	0.117	0.070	0.187	NA	NA
	Back Side	0.169	0.070	0.239	NA	NA

Table 112: Simultaneous Tx Combination of GSM850 and BT.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		GSM1900	BT			
Body-Worn	Front Side	0.198	0.070	0.268	NA	NA
	Back Side	0.321	0.070	0.391	NA	NA

Table 113: Simultaneous Tx Combination of GSM1900 and BT.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		UMTS Band V	BT			
Body-Worn	Front Side	0.139	0.070	0.139	NA	NA
	Back Side	0.201	0.070	0.201	NA	NA

Table 114: Simultaneous Tx Combination of UMTS Band V and BT.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		UMTS Band IV	BT			
Body-Worn	Front Side	0.577	0.070	0.647	NA	NA
	Back Side	1.004	0.070	1.074	NA	NA

Table 115: Simultaneous Tx Combination of UMTS Band IV and BT.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		UMTS Band II	BT			
Body-Worn	Front Side	0.473	0.070	0.543	NA	NA
	Back Side	0.668	0.070	0.738	NA	NA

Table 116: Simultaneous Tx Combination of UMTS Band II and BT.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		LTE Band II	BT			
Body-Worn	Front Side	0.317	0.070	0.387	NA	NA
	Back Side	0.524	0.070	0.594	NA	NA

Table 117: Simultaneous Tx Combination of LTE Band II and BT.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		LTE Band IV	BT			
Body-Worn	Front Side	0.632	0.070	0.702	NA	NA
	Back Side	1.265	0.070	1.335	NA	NA

Table 118: Simultaneous Tx Combination of LTE Band IV and BT.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		LTE Band V	BT			
Body-Worn	Front Side	0.172	0.070	0.242	NA	NA
	Back Side	0.267	0.070	0.337	NA	NA

Table 119: Simultaneous Tx Combination of LTE Band V and BT.

Test Position		Scaled SAR _{Max}		Σ1-g SAR (W/kg)	SPLSR	Remark
		LTE Band VII	BT			
Body-Worn	Front Side	0.204	0.070	0.274	NA	NA
	Back Side	0.388	0.070	0.458	NA	NA

Table 120: Simultaneous Tx Combination of LTE Band VII and BT.

Test Position		Scaled SAR _{Max}		Σ10-g SAR (W/kg)	SPLSR	Remark
		LTE Band IV	WiFi 5G			
10-g Extremity	Front Side	/	0.237	0.237	NA	NA
	Back Side	/	0.336	0.336	NA	NA
	Left Side	/	/	/	NA	NA
	Right Side	/	/	/	NA	NA
	Top Side	/	0.268	0.268	NA	NA
	Bottom Side	1.566	/	1.566	NA	NA

Table 121: Simultaneous Tx Combination of LTE Band IV and WiFi 5G for 10-g Extremity.

Test Position		Scaled SAR _{Max}		Σ10-g SAR (W/kg)	SPLSR	Remark
		LTE Band IV	BT			
10-g Extremity	Front Side	/	0.084	0.084	NA	NA
	Back Side	/	0.084	0.084	NA	NA
	Left Side	/	0.084	0.084	NA	NA
	Right Side	/	0.084	0.084	NA	NA
	Top Side	/	0.084	0.084	NA	NA
	Bottom Side	1.566	0.084	1.650	NA	NA

Table 122: Simultaneous Tx Combination of LTE Band IV and BT for 10-g Extremity.



7.3.4 Simultaneous Transmission Conclusion

The above numeral summed SAR results and SPLSR analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01v05r02



Appendix A. System Check Plots
(Pls See Appendix A.)

Appendix B. SAR Measurement Plots
(Pls See Appendix B.)

Appendix C. Calibration Certificate
(Pls See Appendix C.)

Appendix D. Photo documentation
(Pls See Appendix D.)

End