

# FCC & IC RF Test Report

**Product Name: Smart Phone**

**Model Number: HUAWEI MT7-L09,MT7-L09**

**Report No: SYBH(Z-RF)021072014-2003**

**FCC ID: QISMT7-L09**

**IC: 6369A-MT7L09**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,  
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808

Fax: +86 755 89652518



## Notice

1. The laboratory has Passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has Passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory has been listed by the US Federal Communications Commission to perform electromagnetic emission measurements. The site recognition number is 97456.
4. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-2.
5. The laboratory has been listed by the VCCI to perform EMC measurements. The accreditation numbers of test site No.1 are R-2364, G-415, C-2583, and T-256, and the accreditation numbers of test site No.2 are R-3760, G-485, C-4210 and T-1237.
6. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
7. The test report is invalid if there is any evidence of erasure and/or falsification.
8. The test report is only valid for the test samples.
9. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.




**Applicant:** Huawei Technologies Co., Ltd.  
**Address:** Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Date of Receipt Sample:** 2014-07-21  
**Start Date of Test:** 2014-07-22  
**End Date of Test:** 2014-08-08

**Test Result:** Pass

<b>Approved by Senior Engineer:</b>	2014-08-15	Liu Chunlin	
	Date	Name	Signature

<b>Prepared by:</b>	2014-08-15	Zhang Guocai	
	Date	Name	Signature



**Modification Record**

No.	Last Report No.	Modification Description
1		First report.



## CONTENT

1	General Information.....	6
1.1	Applied Standard.....	6
1.2	Test Location .....	6
1.3	Test Environment Condition.....	6
2	Test Summary .....	7
3	Description of the Equipment under Test (EUT) .....	8
3.1	General Description .....	8
3.2	EUT Identity .....	8
3.3	Technical Description.....	9
4	General Test Conditions / Configurations .....	10
4.1	EUT Configurations.....	10
4.2	Test Environments .....	11
4.3	Description of tests.....	12
4.4	Test Setups.....	14
4.5	Test Conditions .....	17
5	Main Test Instruments .....	18



## 1 General Information

### 1.1 Applied Standard

Applied Rules: 47 CFR FCC Part 2, Subpart J 2013  
47 CFR FCC Part 15, Subpart C 2013  
IC RSS-Gen (Issue 3, December 2010)  
IC RSS-210 (Issue 8, December 2010)

Test Method: FCC KDB 558074 D01 DTS Meas Guidance v03r01  
ANSI C63.10-2009, American National Standard for Testing Unlicensed  
Wireless Devices.

### 1.2 Test Location

Test Location 1: Reliability Laboratory of Huawei Technologies Co., Ltd.  
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C

### 1.3 Test Environment Condition

Ambient Temperature: 19.5to 25 °C  
Ambient Relative Humidity: 40 to 55 %  
Atmospheric Pressure: Not applicable



## 2 Test Summary

Test Item	FCC Part No.	IC Part No.	Requirements	Test Result	Verdict
DTS (6 dB) Bandwidth	15.247(a)(2)	RSS-210 A8.1	$\geq 500$ kHz.	Appendix A	Pass
Maximum Peak Conducted Output Power	15.247(b)(3)	RSS-210 A8.4	For directional gain: < 30 dBm – (G[dBi] – 6 [dB]), peak; Otherwise: < 30 dBm, peak.	Appendix B	Pass
Average Power	---	RSS-210	None; for reporting purposes only	Appendix C	---
Maximum Power Spectral Density Level	15.247(e)	RSS-210	For directional gain: < 8 dBm/3 kHz – (G[dBi] – 6 [dB]), peak. Otherwise: < 8 dBm/3 kHz, peak.	Appendix D	Pass
Band Edges Compliance	15.247(d)	RSS-210, A8.5	< -20 dB/100 kHz if total peak power $\leq$ power limit.	Appendix E	Pass
Unwanted Emissions into Non-Restricted Frequency Bands				Appendix F	Pass
Unwanted Emissions into Restricted Frequency Bands (Radiated)	15.247(d) 15.209 (NOTE 1)	RSS-210, A8.5 RSS-210, 2.2 RSS-Gen, 7.2.2 RSS-Gen, 7.2.5	FCC Part 15.209 field strength limit;	Appendix G	Pass
AC Power Line Conducted Emissions	15.207	RSS-Gen, 7.2.4	FCC Part 15.207 conducted limit;	Appendix H	Pass
NOTE 1: According to KDB 558074, antenna-port conducted measurements are acceptable as an alternative to radiated measurements for demonstrating compliance to the limits in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case emissions will also be required.					



### 3 Description of the Equipment under Test (EUT)

#### 3.1 General Description

HUAWEI MT7-L09,MT7-L09 is subscriber equipment in the LTE/UMTS/GSM system. The LTE frequency band is Band I,Band II,Band III,Band IV,Band V,Band VII,Band VIII,Band XX,Band XXVIII and Band XL. The HSUPA/HSDPA/UMTS frequency band is Band I, Band II, Band IV,Band V and Band VIII. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/UMTS/GSM protocol processing, voice, video, MMS service, GPS, AGPS WIFI and NFC etc. Externally it provides earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

#### 3.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

##### 3.2.1 Board

Board		
Description	Hardware Version	Software Version
Main Board	HL1UJAZZM	Z100-L09V100R001C00B105

##### 3.2.2 Sub-Assembly

Name	Manufacture	Description
Adapter	Huawei Technologies Co., Ltd.	Model: HW-050200U3W Input voltage: ~100-240V 50/60Hz 0.5A Output voltage: 5V  2A Rated Power: 10W
Adapter	Huawei Technologies Co., Ltd.	Model: HW-050200E3W Input voltage: ~100-240V 50/60Hz 0.5A Output voltage: 5V  2A Rated Power: 10W
Adapter	Huawei Technologies Co., Ltd.	Model: HW-050200B3W Input voltage: ~100-240V 50/60Hz 0.5A Output voltage: 5V  2A Rated Power: 10W
Adapter	Huawei Technologies Co., Ltd.	Model: HW-050200A2W Input voltage: ~100-240V 50/60Hz 0.5A



		Output voltage: 5V  2A Rated Power: 10W
Rechargeable Li-ion	Huawei Technologies Co., Ltd.	Battery Model: HB417094EBC Rated capacity: 4000mAh Nominal Voltage:  +3.8V Charging Voltage:  +4.35V

### 3.3 Technical Description

Characteristics	Description	
TX/RX Operating Range	2400-2483.5 MHz band	$f_c = 2402 \text{ MHz} + N * 2 \text{ MHz}$ , where: - $f_c$ = "Operating Frequency" in MHz, - $N$ = "Channel Number" with the range from 0 to 39.
Modulation Type	Digital	GFSK,
Emission Designator	GFSK for BT 4.0: 708KGXD	
Bluetooth Power Class	Class 1	



## 4 General Test Conditions / Configurations

### 4.1 EUT Configurations

#### 4.1.1 General Configurations

Configuration	Description
Test Antenna Ports	Until otherwise specified, <ul style="list-style-type: none"><li>- All TX tests are performed at all TX antenna ports of the EUT, and</li><li>- All RX tests are performed at all RX antenna ports of the EUT.</li></ul>
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

#### 4.1.2 Customized Configurations

# EUT Conf.	Signal Description	Operating Frequency
TM1_DH5_Ch0	GFSK for BT 4.0 modulation, package type DH5, hopping off.	Ch No. 0 / 2402 MHz
TM1_DH5_Ch19	GFSK for BT 4.0 modulation, package type DH5, hopping off.	Ch No. 19 / 2440 MHz
TM1_DH5_Ch39	GFSK for BT 4.0 modulation, package type DH5, hopping off.	Ch No. 39 / 2480 MHz



## 4.2 Test Environments

NOTE: The values used in the test report may be stringent than the declared.

Environment Parameter	Selected Values During Tests		
	Temperature	Voltage	Relative Humidity
NTNV	Ambient	3.8 VDC	Ambient



### 4.3 Description of tests

#### 4.3.1 Bandwidth measurement

- (a) Connect EUT test port to spectrum analyzer.
- (b) Set the EUT to transmit maximum output power at 2.4GHz, then set the measured frequency number and test the bandwidth with spectrum analyzer.

#### 4.3.2 Peak output power

- (a) Connect EUT test port to spectrum analyzer.
- (b) Set the EUT to transmit maximum output power at 2.4GHz.
- (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted output power separately.

#### 4.3.3 Power spectral density

- (a) Connect EUT test port to spectrum analyzer
- (b) Set the EUT to transmit maximum output power at 2.4GHz.
- (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted power spectral density.

#### 4.3.4 Band edge spurious emission

- (a) Connect EUT test port to spectrum analyzer
- (b) Set the EUT to transmit maximum output power at 2.4GHz.
- (c) Then set the EUT to transmit at high, low frequency and measure the conducted band edge spurious separately.

#### 4.3.5 Conducted RF spurious

- (a) Connect EUT test port to spectrum analyzer
- (b) Set the EUT to transmit maximum output power at 2.4GHz.
- (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted spurious separately.

#### 4.3.6 Radiated spurious emission & spurious in restricted band

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2009. The Radiated Disturbance measurements were made using a Rohde and Schwarz Test Receiver and control software.

A preliminary scan and a final scan of the emissions were made by using test script of software; the emissions were measured using a Quasi-Peak Detector below 1GHz, Peak Detector and AV Detector above 1GHz. The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m, and the azimuth range of turntable was 0° to 360°. The receive antenna has two polarizations V and H.



A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other nonmetallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized.

The EUT communicates with the BTS simulator through Air interface. The EUT operated on the typical channel.

Measurement bandwidth: 30 MHz – 1000 MHz: 120 kHz

Measurement bandwidth: 1000 MHz – 10<sup>th</sup> Carrier Frequency: 1 MHz

#### **4.3.7 Conducted Emission at Power Port**

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2009.

Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector.


The EUT communicates with the BTS simulator through Air interface, the BTS simulator controls the Wireless Modem to transmitter the maximum power which defined in specification of product. The Wireless Modem operated on the typical channel.

Measurement bandwidth (RBW) for 150kHz to 30 MHz: 9 kHz;

## 4.4 Test Setups

### 4.4.1 Test Setup 1


The Bluetooth component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by Bluetooth System Simulator and/or PC/software to emit the specified signals for the purpose of measurements.

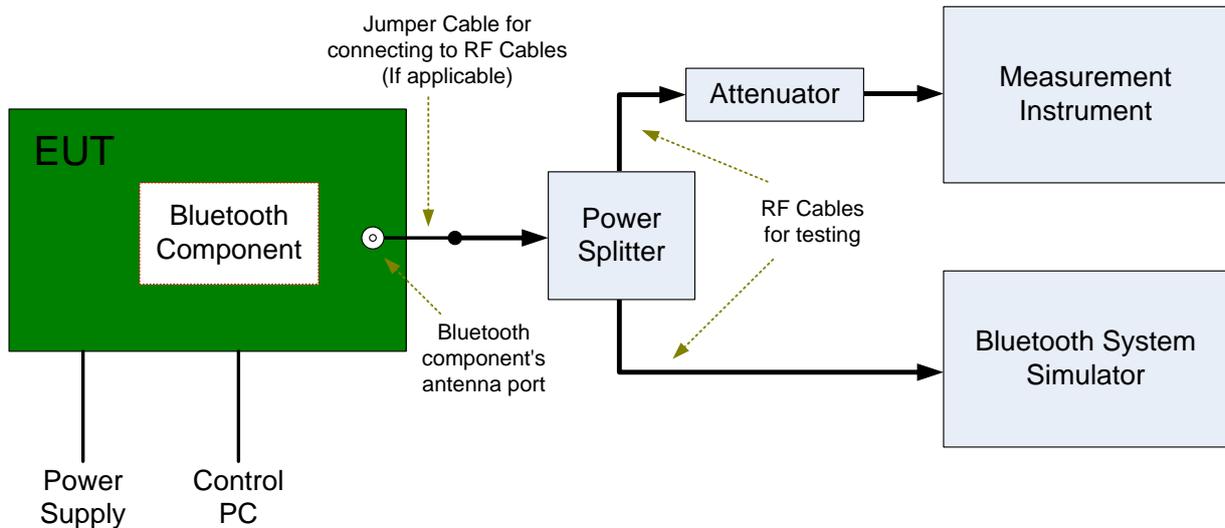


### 4.4.2 Test Setup 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3m. The setup is according to ANSI C63.4 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

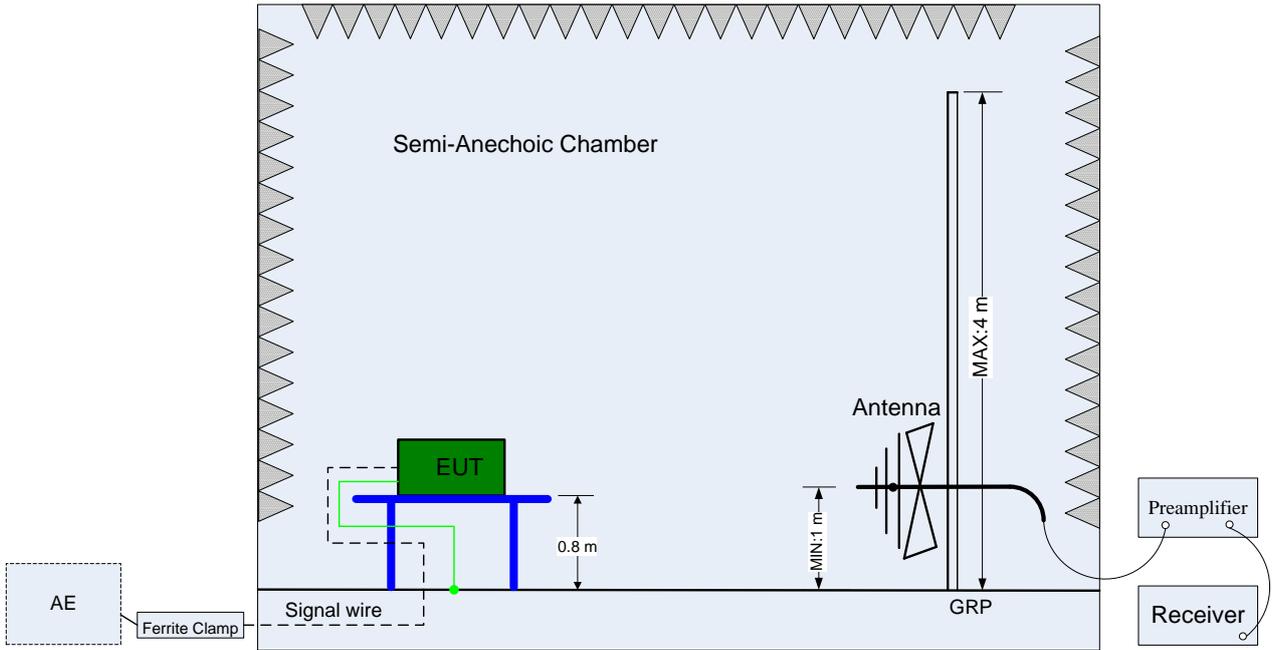

(Below 1 GHz)

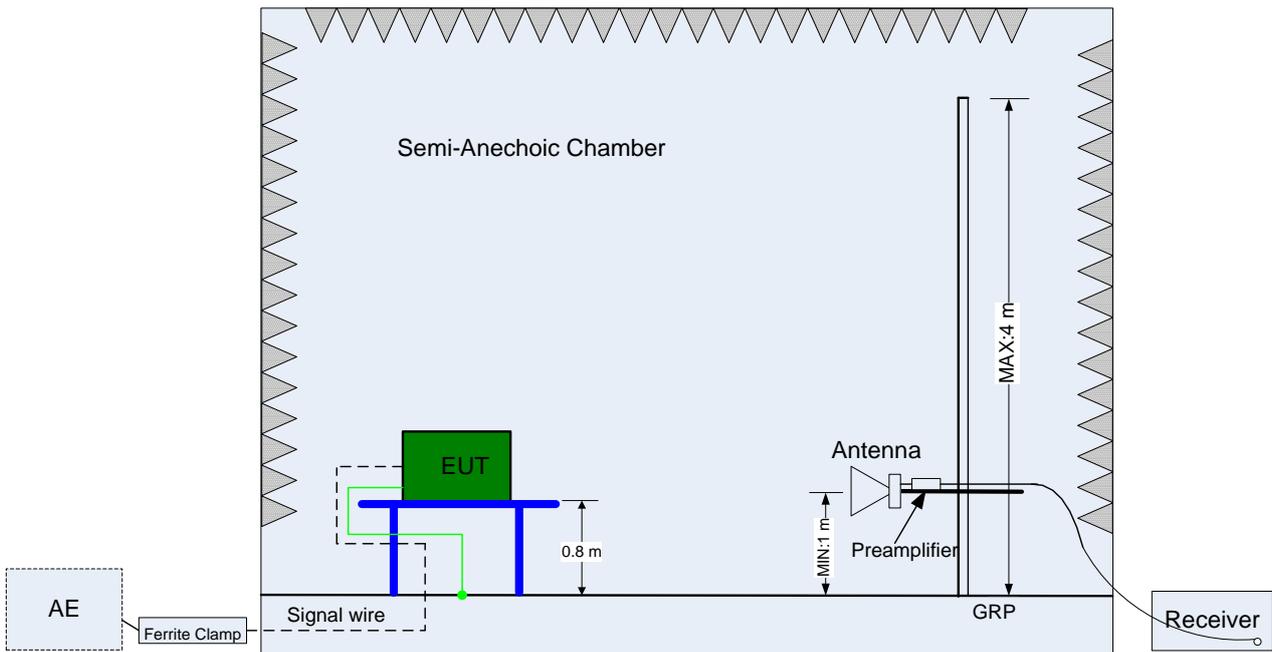


(Above 1 GHz)

### 4.4.3 Test Setup 3

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

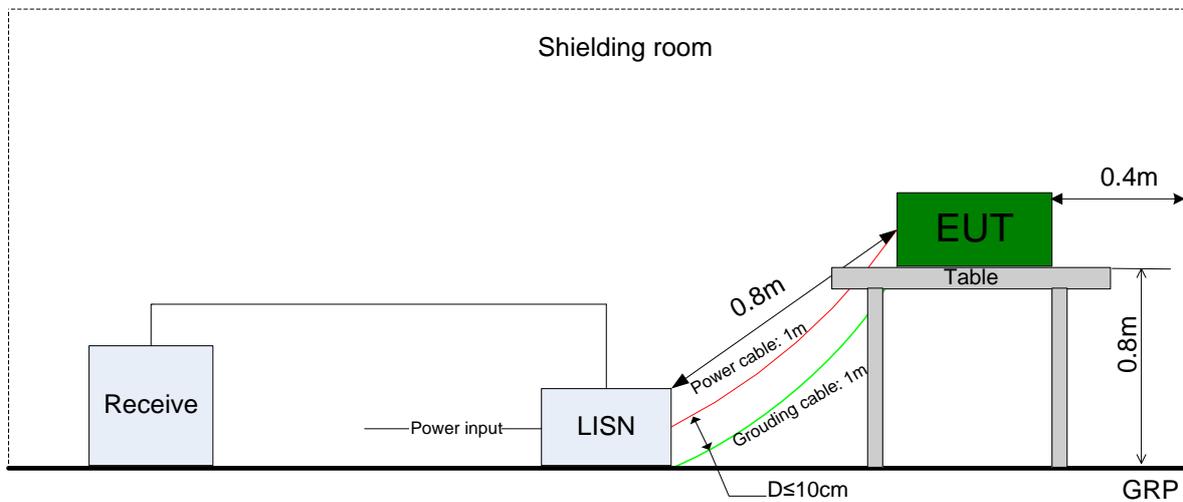



#### 4.5 Test Conditions

Test Case	Test Conditions			
	Configuration	Description		
6dB Emission Bandwidth (EBW)	Meas. Method	FCC KDB 558074 §8.2 Option 2.		
	Test Env.	NTNV		
	Test Setup	Test Setup 1		
	EUT Conf.	TM1_DH5_Ch0, TM1_DH5_Ch19, TM1_DH5_Ch39.		
Maximum Peak Conducted Output Power	Meas. Method	FCC KDB 558074 §9.1 .1 (RBW ≥ DTS bandwidth).		
	Test Env.	NTNV		
	Test Setup	Test Setup 1		
	EUT Conf.	TM1_DH5_Ch0, TM1_DH5_Ch19, TM1_DH5_Ch39.		
Maximum Power Spectral Density Level	Meas. Method	FCC KDB 558074 §10.2 (peak PSD).		
	Test Env.	NTNV		
	Test Setup	Test Setup 1		
	EUT Conf.	TM1_DH5_Ch0, TM1_DH5_Ch19, TM1_DH5_Ch39.		
Band edge spurious emission	Meas. Method	FCC KDB 558074 §13.0.		
	Test Env.	NTNV		
	Test Setup	Test Setup 1		
	EUT Conf.	TM1_DH5_Ch0, TM1_DH5_Ch39.		
Unwanted Emissions into Non-Restricted Frequency Bands	Meas. Method	FCC KDB 558074 §11.0		
	Test Env.	NTNV		
	Test Setup	Test Setup 1		
	EUT Conf.	TM1_DH5_Ch0, TM1_DH5_Ch19, TM1_DH5_Ch39.		
Unwanted Emissions into Restricted Frequency Bands (Radiated)	Meas. Method	ANSI C63.10; FCC KDB 558074 §12.1, Radiated		
	Test Env.	NTNV		
	Test Setup	Test Setup 2		
	EUT Conf.	30 MHz -1 GHz	TM1_DH5_Ch0 (Worst Conf.).	
		1-3 GHz	TM1_DH5_Ch0, TM1_DH5_Ch19, TM1_DH5_Ch39.	
3-18 GHz		TM1_DH5_Ch19 (Worse Conf.),		
18-26.5 GHz		TM1_DH5_Ch0 (Worst Conf.).		
AC Power Line Conducted Emissions	Meas. Method	AC mains conducted. Pre: RBW = 10 kHz; Det. = Peak. Final: RBW = 9 kHz; Det. = CISPR Quasi-Peak & Average.		
	Test Env.	NTNV		
	Test Setup	Test Setup 3		
	EUT Conf.	TM1_DH5_Ch39.		

**5 Main Test Instruments**

Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal- Due
Power supply	KEITHLEY	2303	1288003	2012-11-19	2014-11-18
Wireless Communication Test set	Agilent	N4010A	MY49081592	2013-10-29	2014-10-28
Universal Radio Communication Tester	R&S	CMU200	117341	2014-02-25	2015-02-24
Spectrum Analyzer	Agilent	N9020A	MY52090652	2014-07-11	2015-07-10
Universal Radio Communication Tester	R & S	CMW500	126855	2013-08-08	2015-08-09
Spectrum Analyzer	Agilent	E4440A	MY48250119	2014-07-11	2015-07-10
Signal Analyzer	R&S	FSQ31	200021	2013-10-29	2014-10-28
Spectrum Analyzer	Agilent	N9030A	MY49431698	2013-10-29	2014-10-28
Temperature Chamber	WEISS	WKL64	56246002940010	2014-02-25	2015-02-24
Temperature Chamber	ESPEC	MW3030	06114003	2014-05-09	2015-05-08
Signal generator	Agilent	E8257D	MY51500314	2014-05-09	2015-05-08
Vector Signal Generator	R&S	SMU200A	104162	2013-10-29	2014-10-28
Test receiver	R&S	ESU26	100150	2014-05-09	2015-05-08
Spectrum analyzer	R&S	FSU3	200474	2013-12-24	2014-12-23
Spectrum analyzer	R&S	FSU43	100144	2013-12-24	2014-12-23
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	2013-02-02	2015-02-01
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-490	2013-02-02	2015-02-01
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100262	2013-03-23	2015-03-22
Pyramidal Horn Antenna(18GHz-26-5GHz)	ETS-LINDGREN	3160-09	5140299	2013-03-05	2015-03-04
Artificial Mains Network	R&S	ENV4200	100134	2013-12-24	2014-12-23
Artificial Mains Network	R&S	ENV216	100382	2013-12-24	2014-12-23

END



# Appendix A: 6dB Emission Bandwidth (EBW)



## 1 Result Table

EUT Conf.	EBW [KHz]	Verdict
TM1_DH5_Ch0	707.95	Pass
TM1_DH5_Ch19	697.67	Pass
TM1_DH5_Ch39	701.99	Pass




## 2 Test Plot

### 2.1 TM1\_DH5\_Ch0






2.2 TM1\_DH5\_Ch19

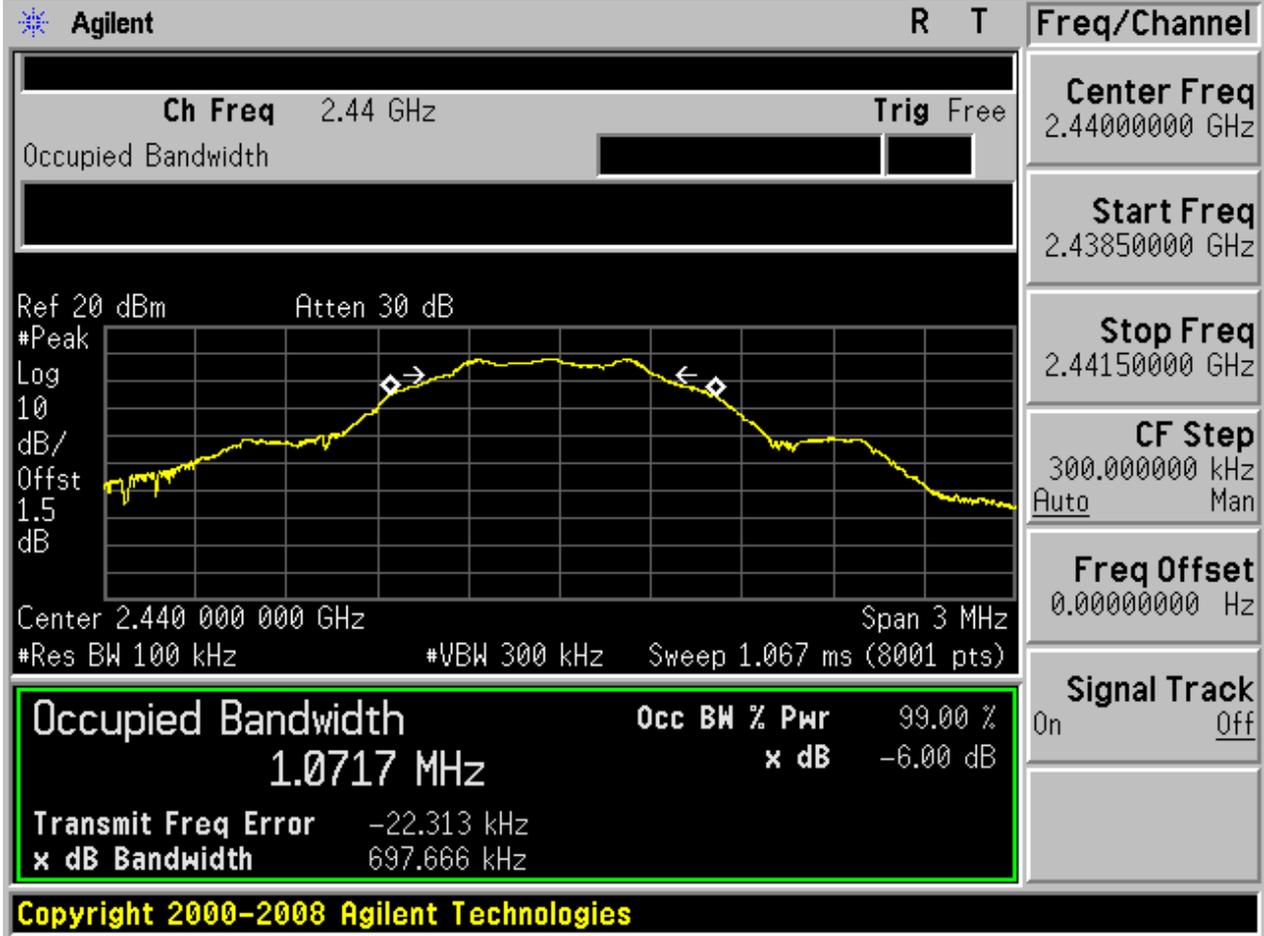



2.3 TM1\_DH5\_Ch39

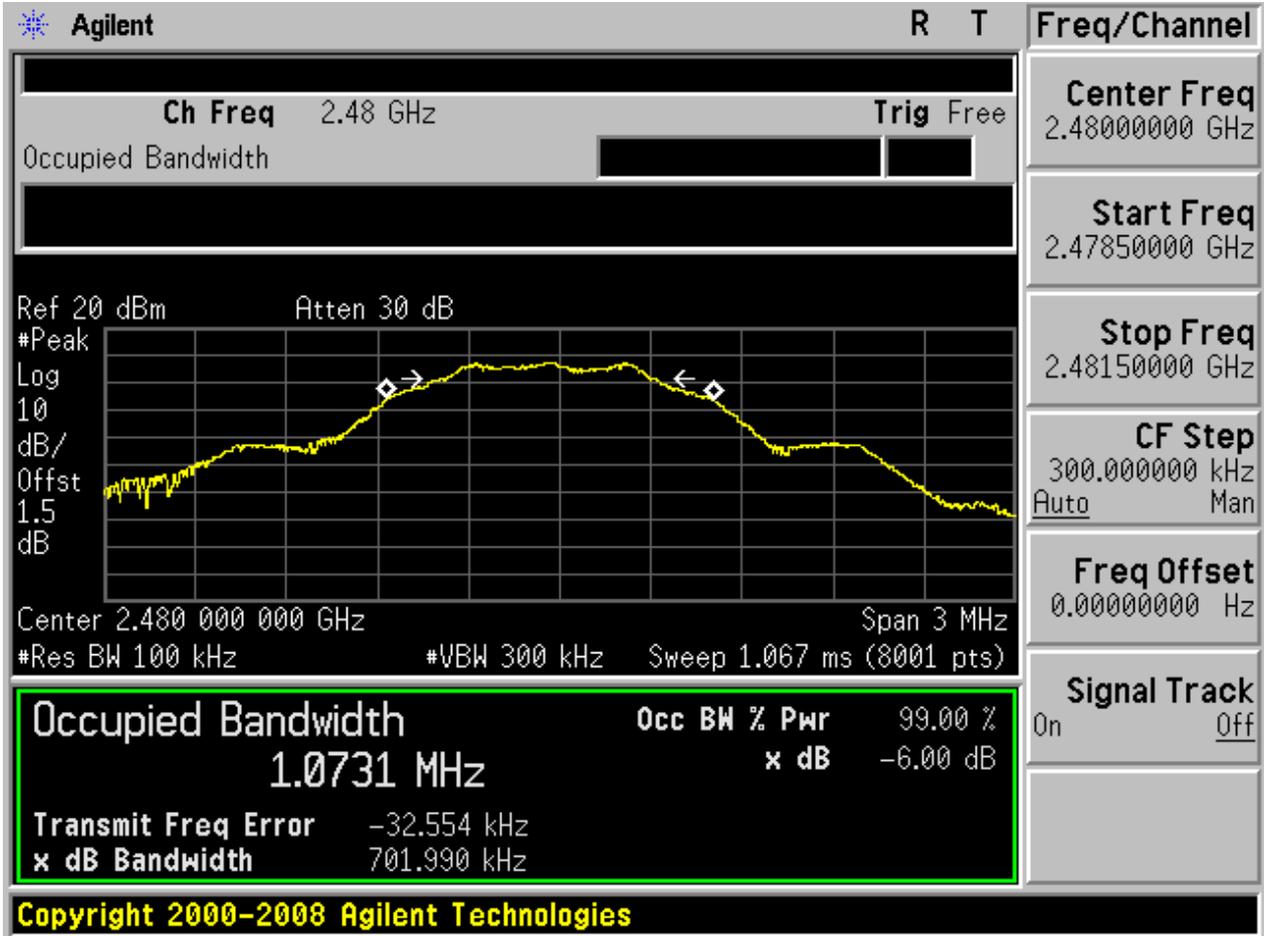



# Appendix B: Maximum Peak Conducted Output Power




## 1 Result Table

EUT Conf.	Max. Peak Power [dBm]	Verdict
TM1_DH5_Ch0	7.54	Pass
TM1_DH5_Ch19	8.97	Pass
TM1_DH5_Ch39	7.88	Pass




## 2 Test Plot

### 2.1 TM1\_DH5\_Ch0

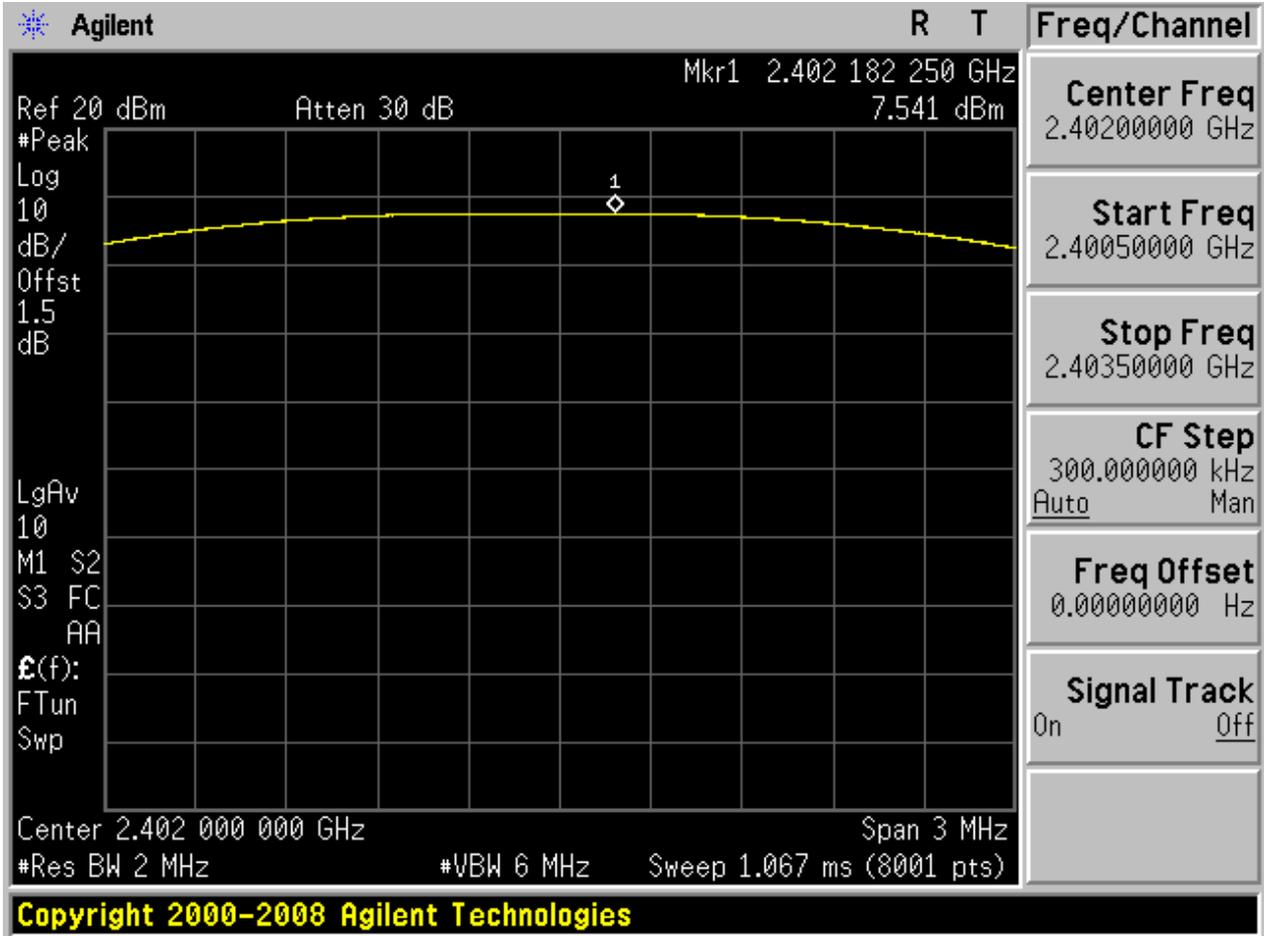




### 2.2 TM1\_DH5\_Ch19

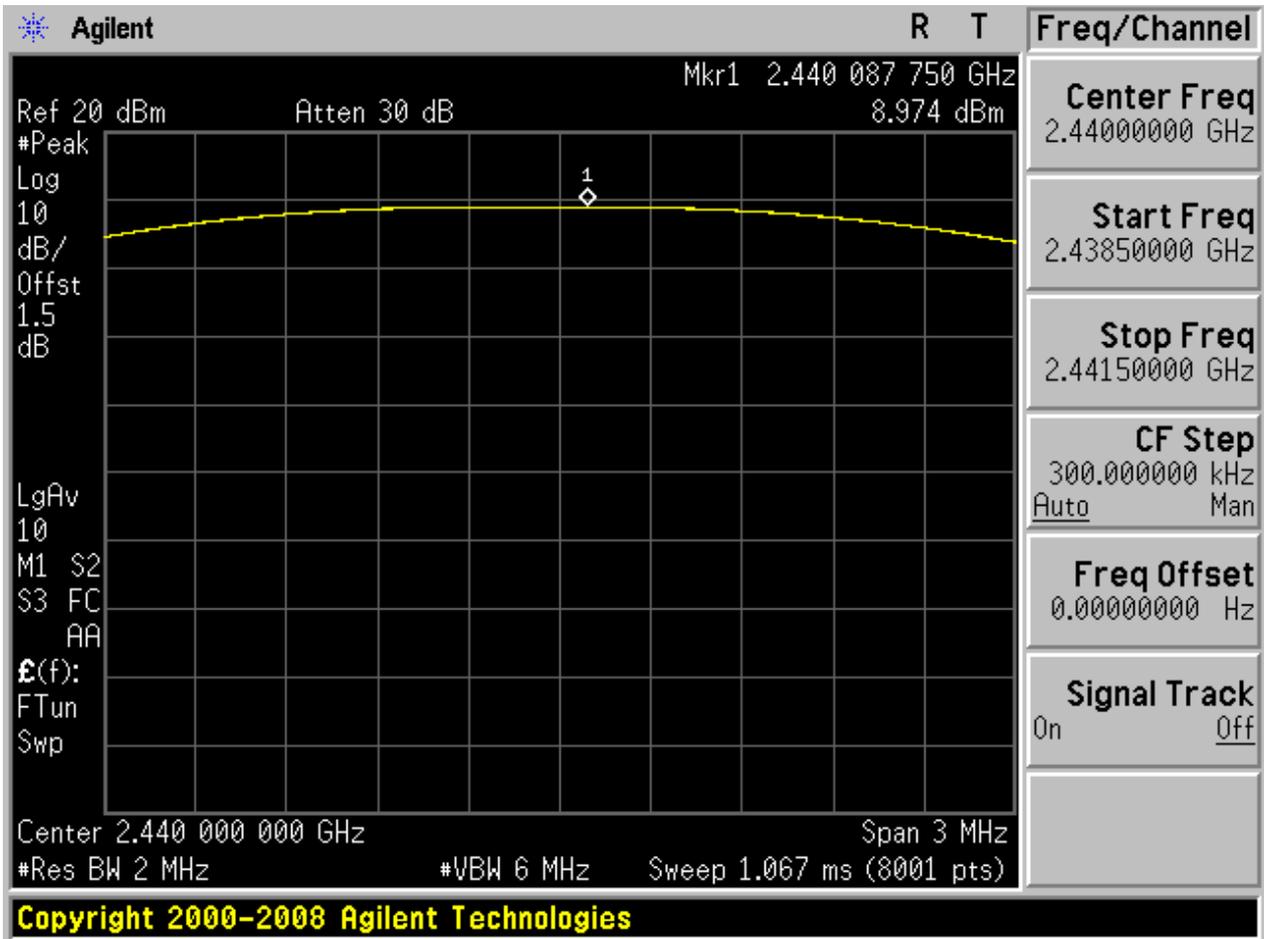



### 2.3 TM1\_DH5\_Ch39

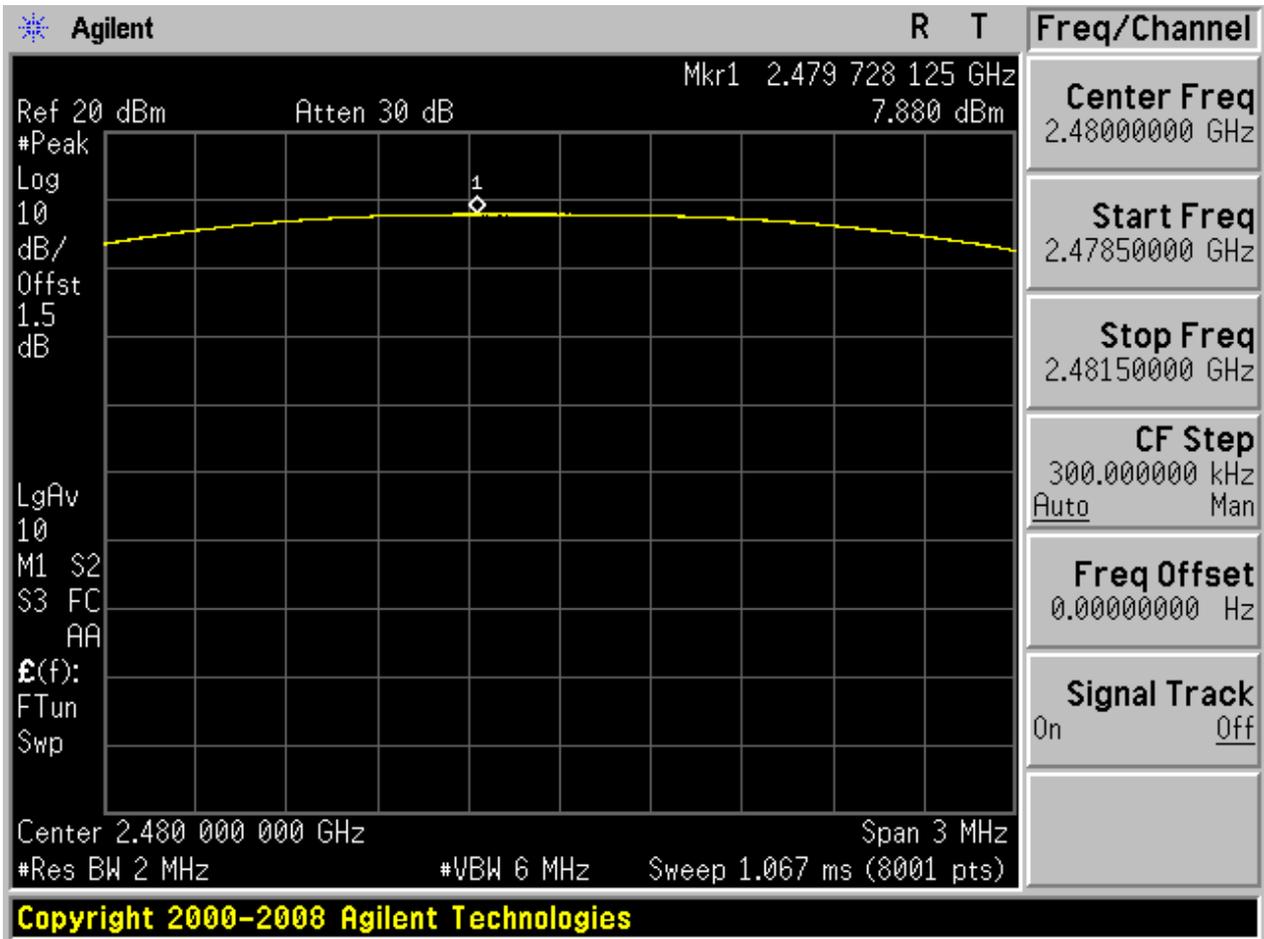




# Appendix C: Maximum Power Spectral Density Level



## 1 Result Table


EUT Conf.	Max. Power Spectral Density Level [dBm]	Verdict
TM1_DH5_Ch0	-1.60	Pass
TM1_DH5_Ch19	-0.153	Pass
TM1_DH5_Ch39	-1.292	Pass

2 Test Plot  
2.1 TM1\_DH5\_Ch0

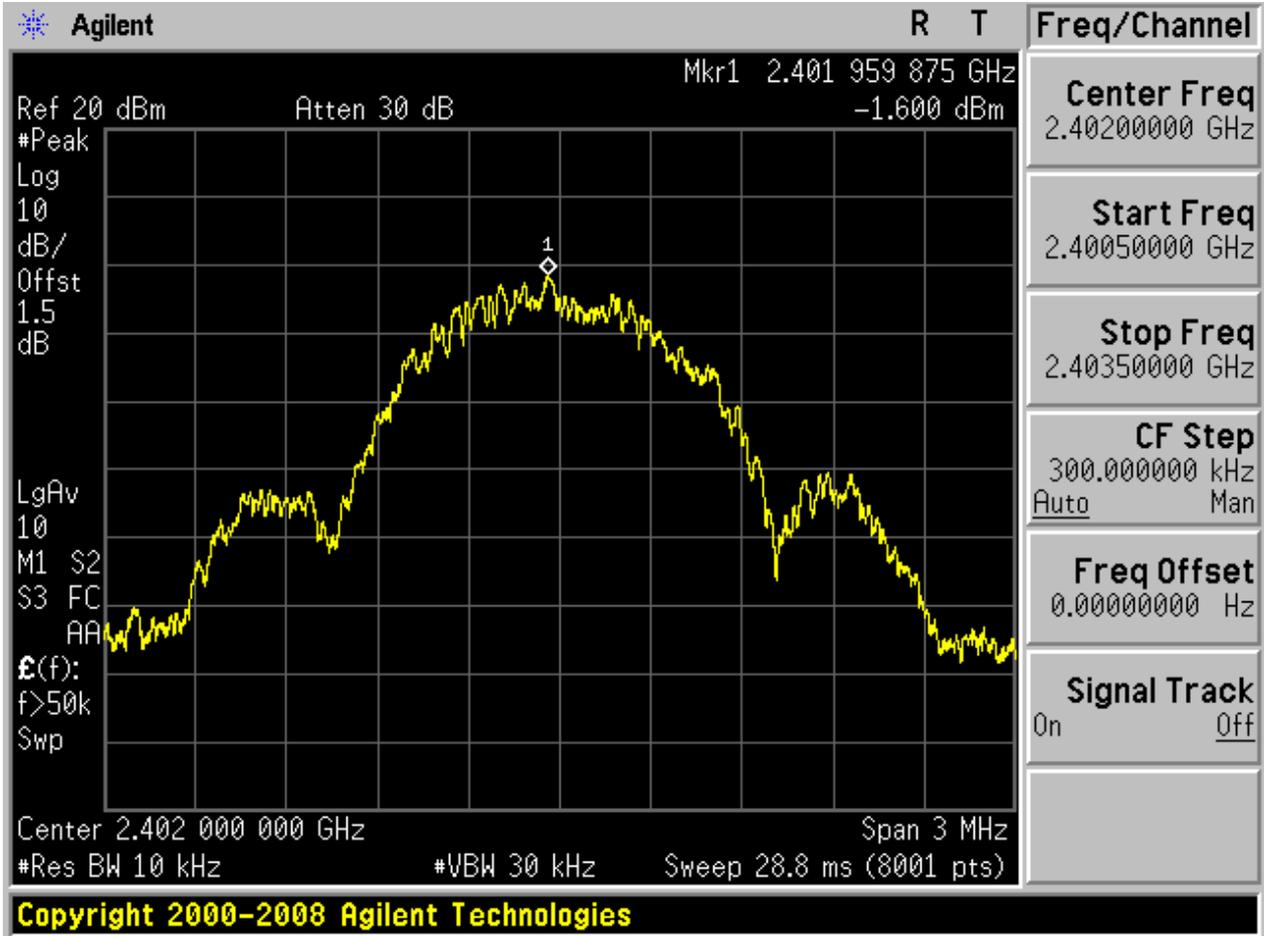




### 2.2 TM1\_DH5\_Ch19

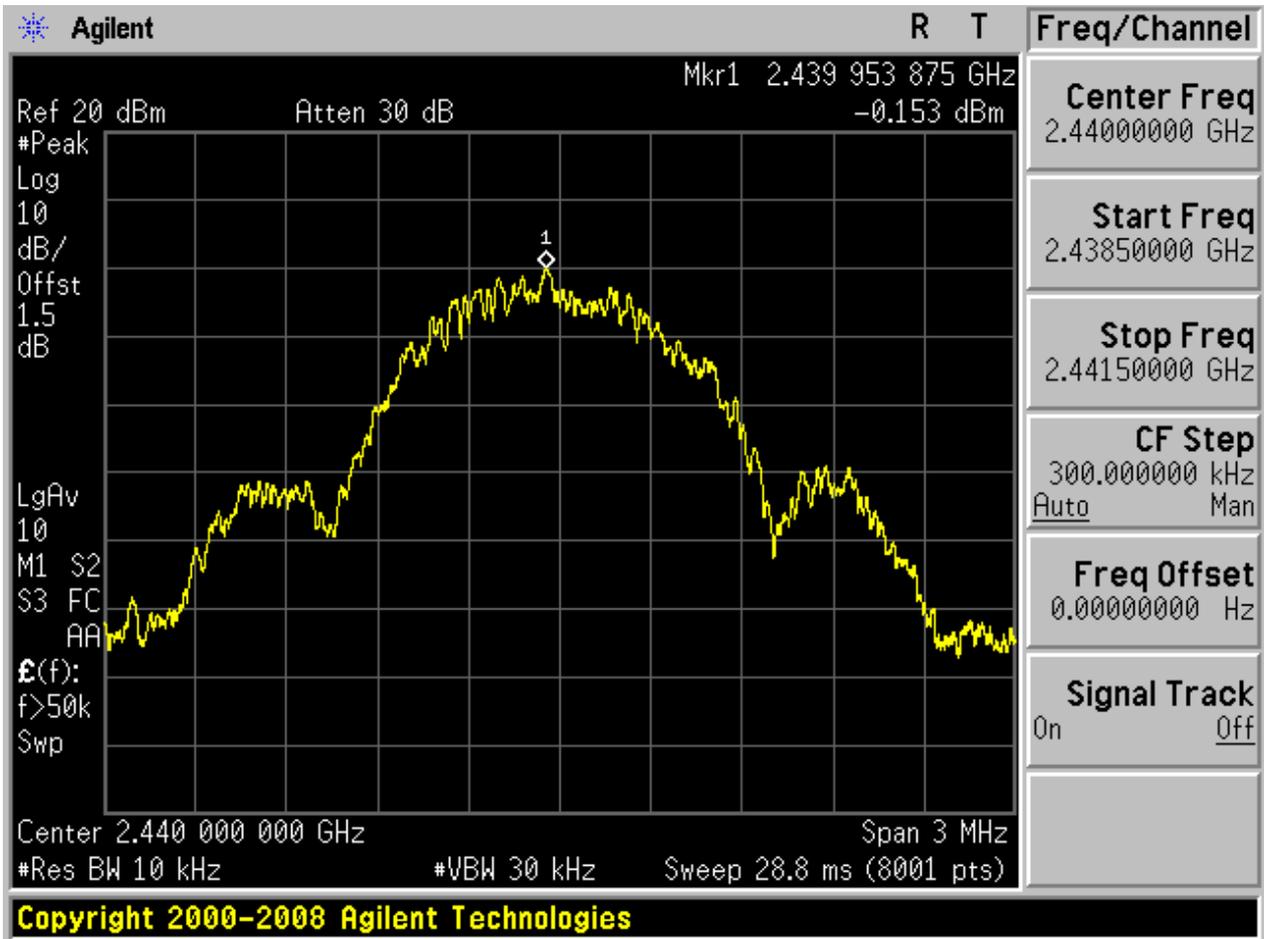

2.3 TM1\_DH5\_Ch39

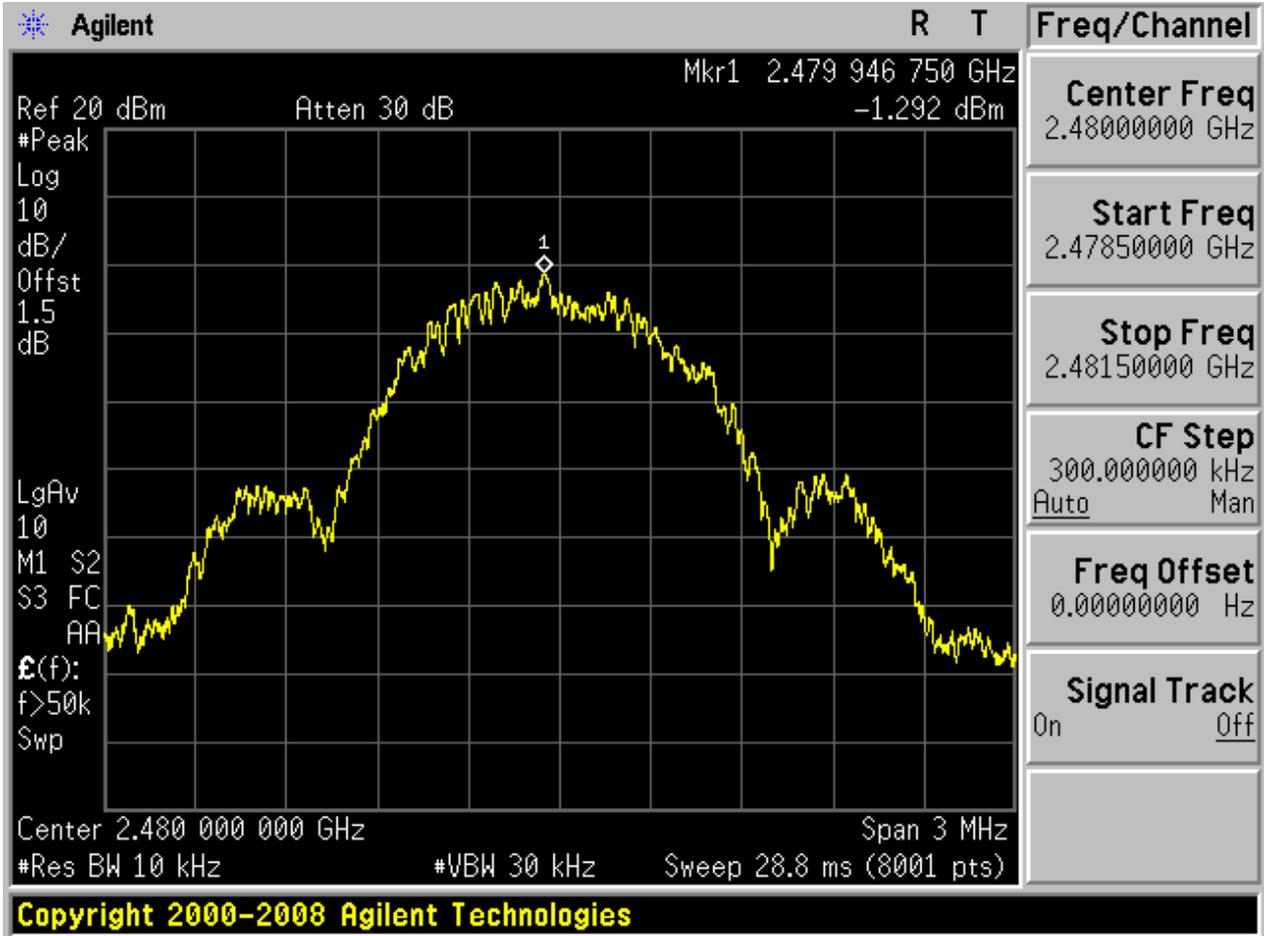



# Appendix D: Band edge spurious emission




### 3 Result Table

EUT Conf.	Channel No.	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max. Spurious Level [dBm]	Limit [dBm]	Result
TM1_DH5_Ch0	0	2402	6.85	Off	-53.23	-13.15	Pass
TM1_DH5_Ch39	39	2480	7.33	Off	-55.38	-12.67	Pass




## 2 Test Plot

### 2.1 TM1\_DH5\_Ch0

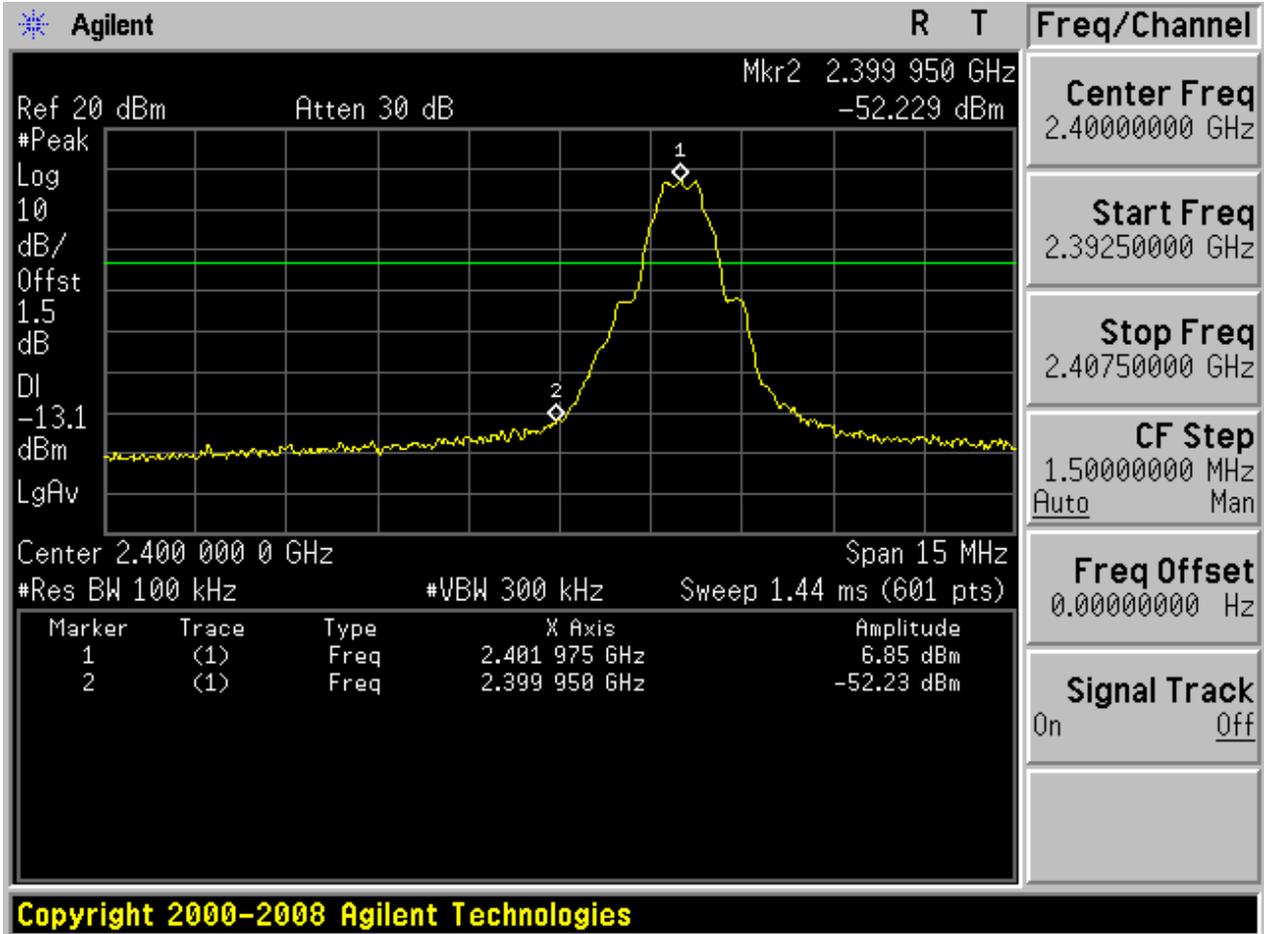

2.2 TM1\_DH5\_Ch39

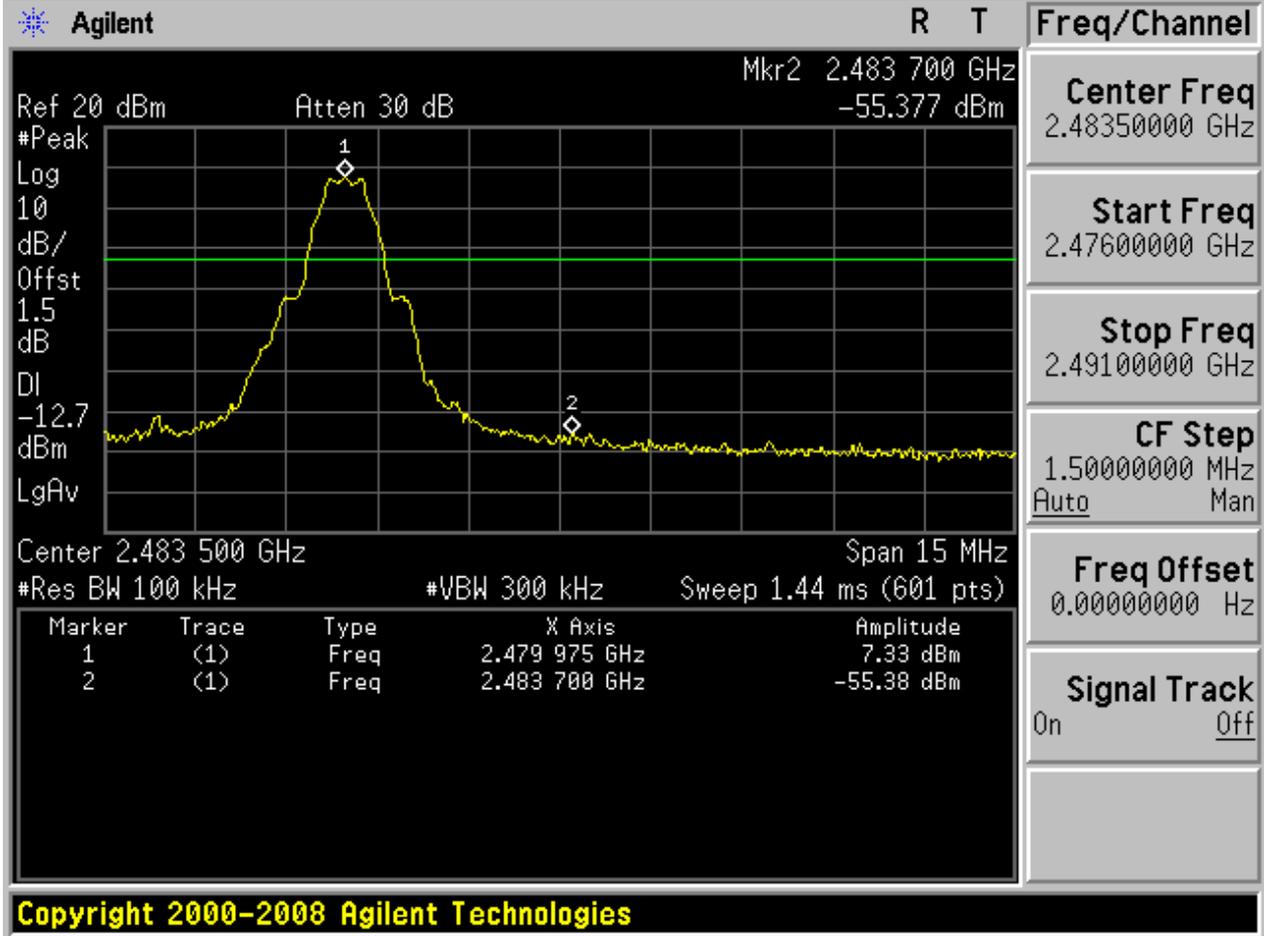



# Appendix E: Conducted RF Spurious Emission



## 1 Result Table

In this Appendix, the “Pref” refers to the peak power level in any 100 kHz bandwidth within the fundamental emission which is used as the reference level, the “Puw” refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW [kHz]})$ . As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

In the result table, the “< Limit” denotes that “The Puw [dBm] is less than Pref [dBm] - 20 [dB], see test plots for detailed”.


EUT Conf.	Pref [dBm/100 kHz]	Puw [dBm/100 kHz]	Verdict
TM1_DH5_Ch0	6.58	< Limit	Pass
TM1_DH5_Ch39	8.14	< Limit	Pass
TM1_DH5_Ch78	7.20	< Limit	Pass




## 2 Test Plot


### 2.1 TM1\_DH5\_Ch0


#### 2.1.1 Pref

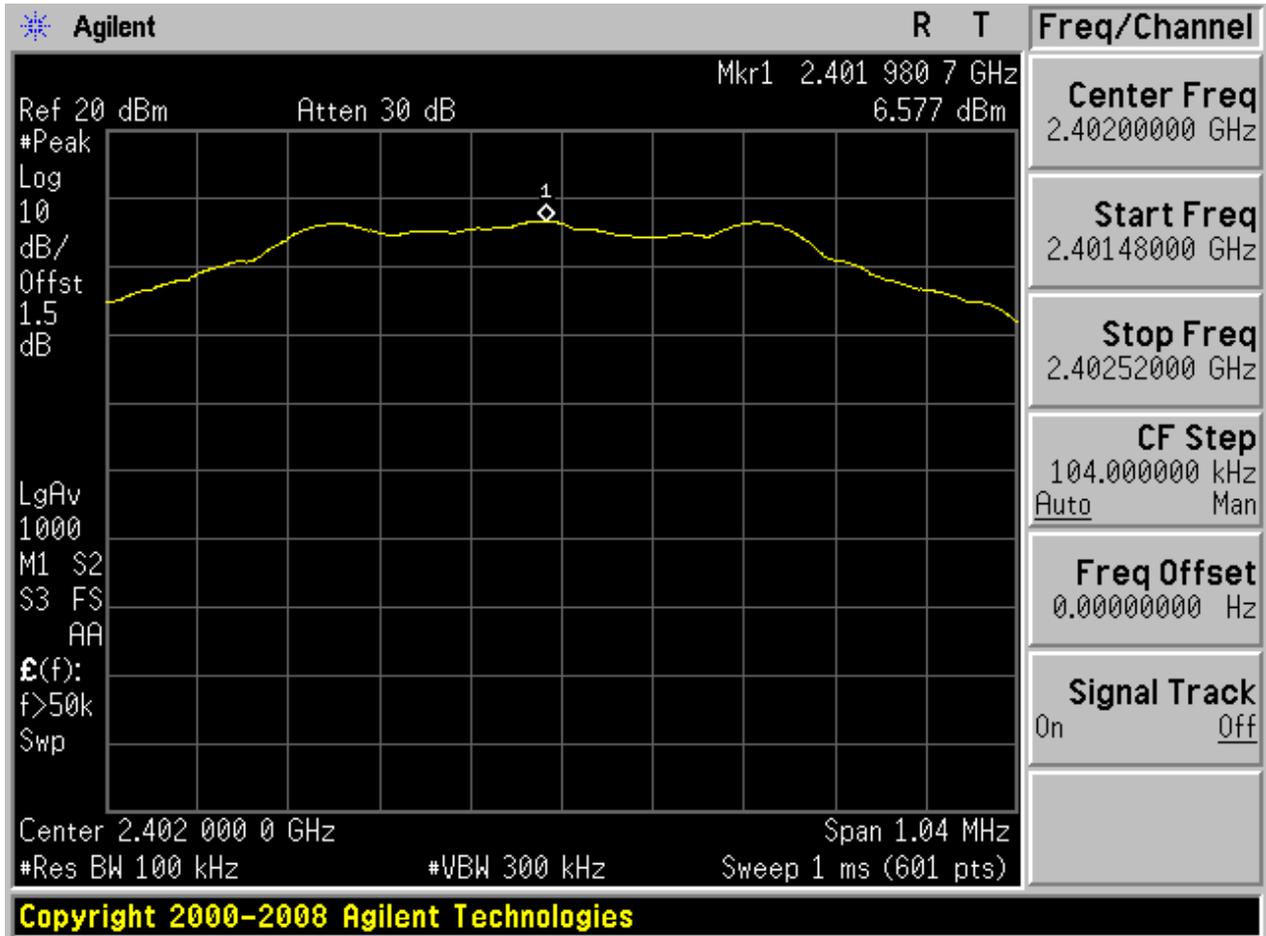



2.1.2 Puw

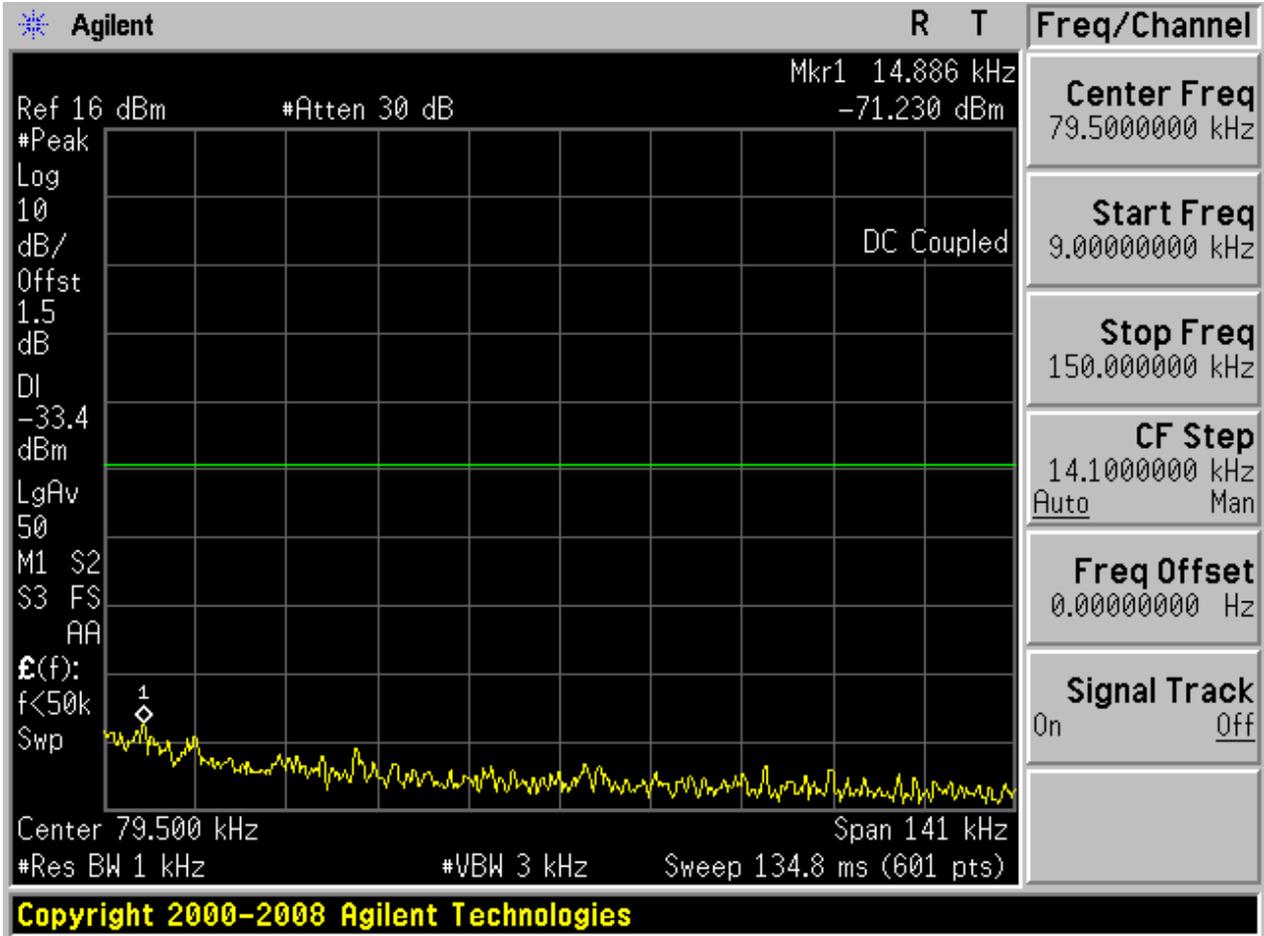


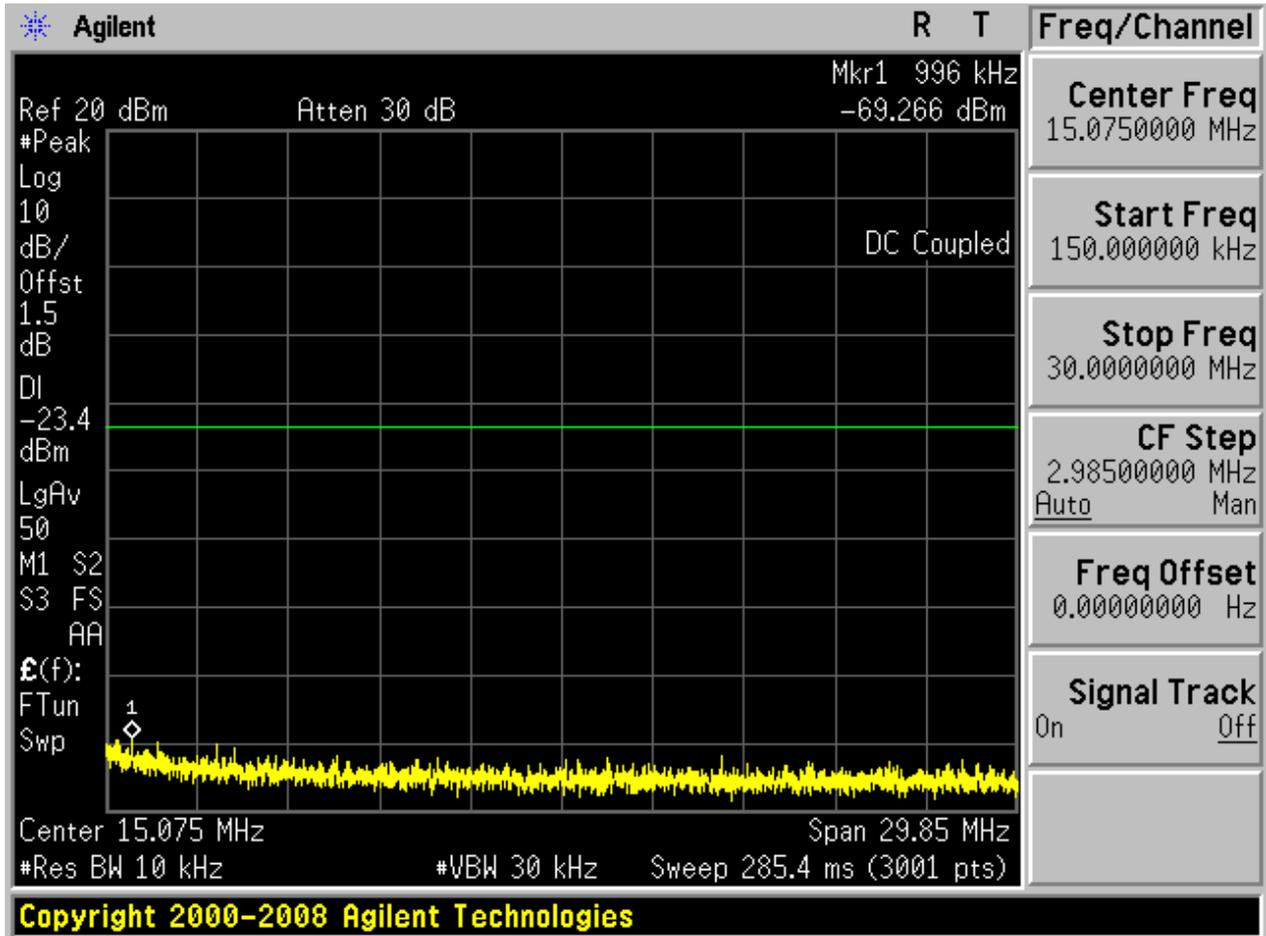

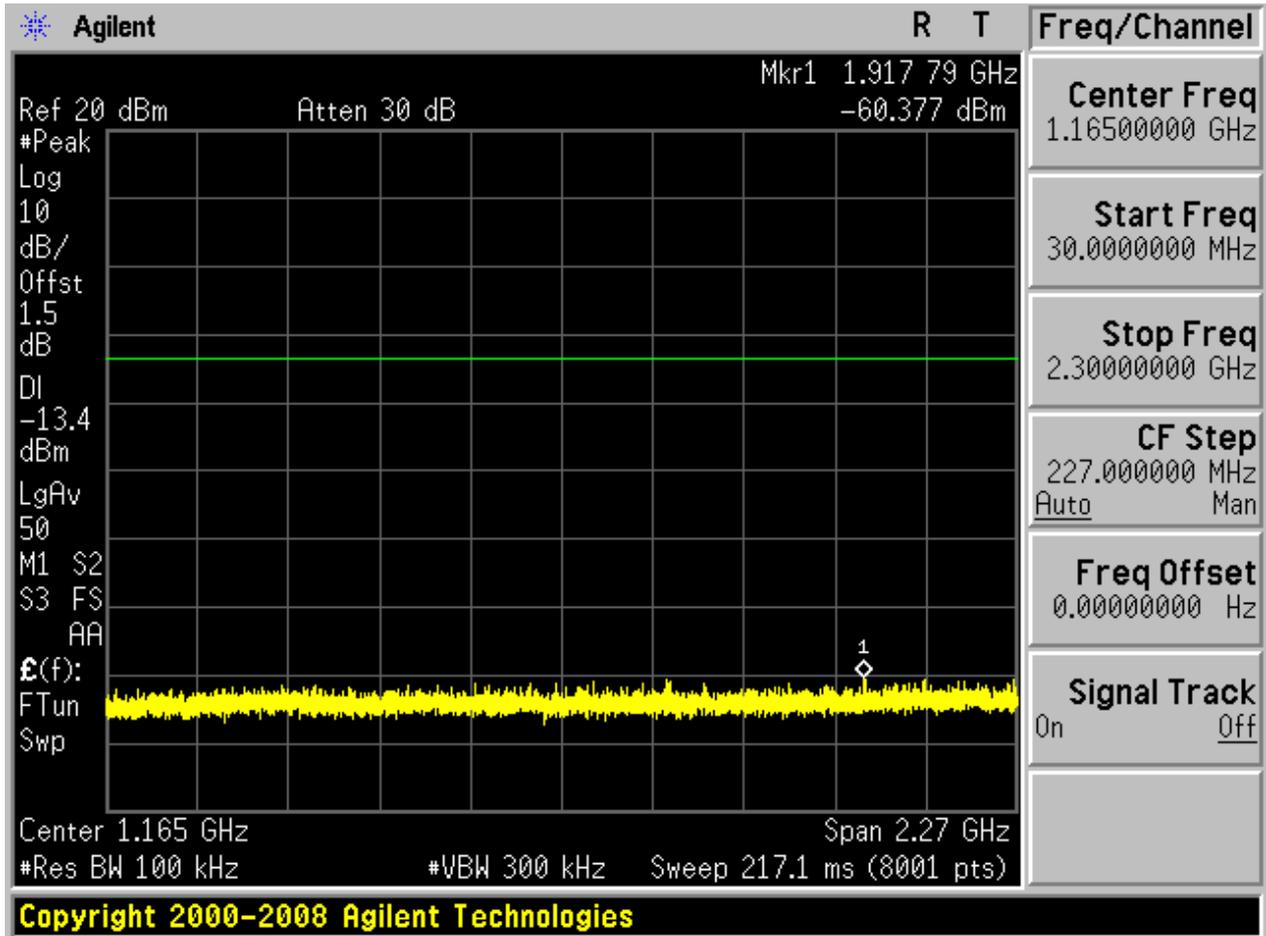

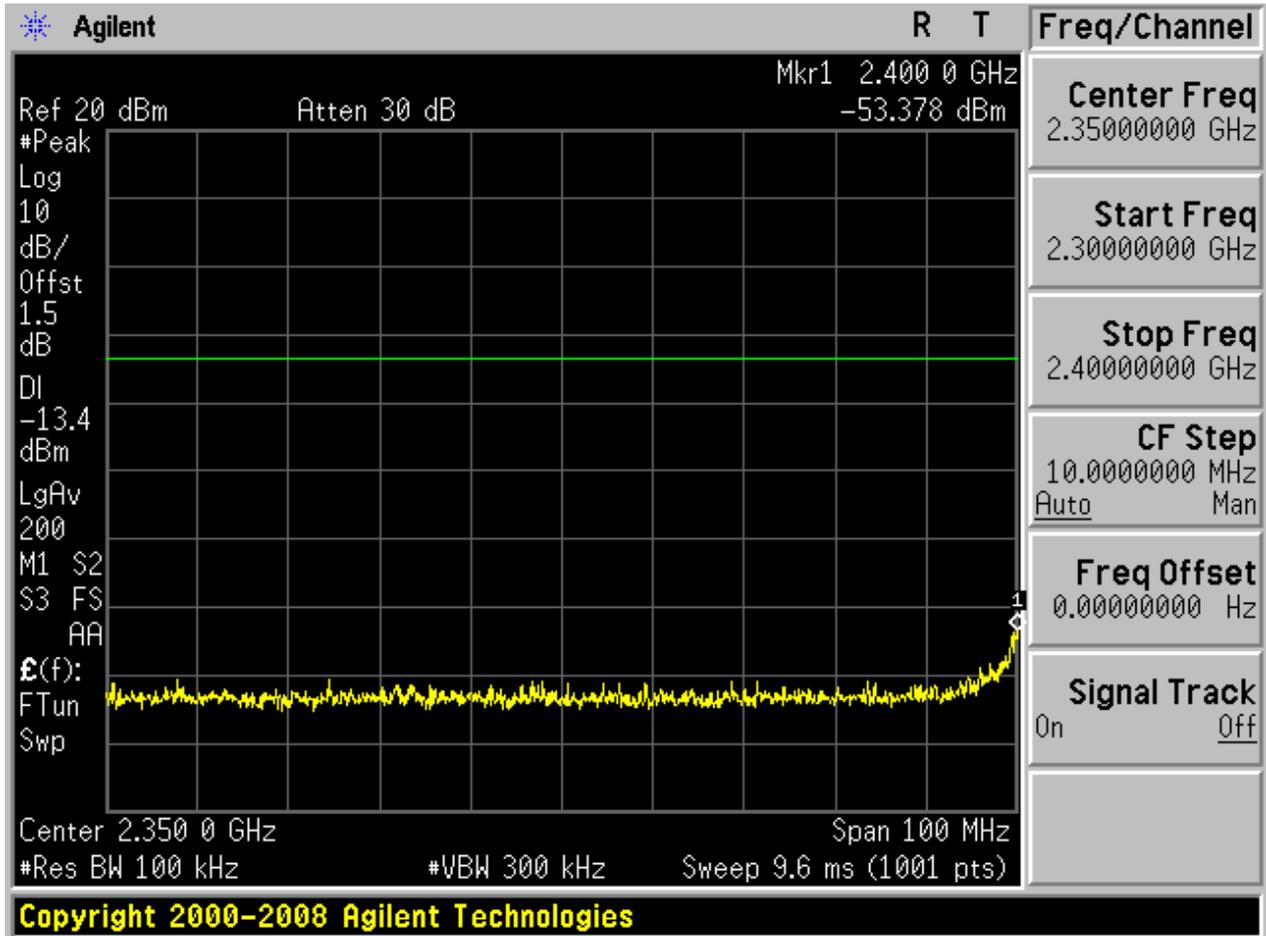

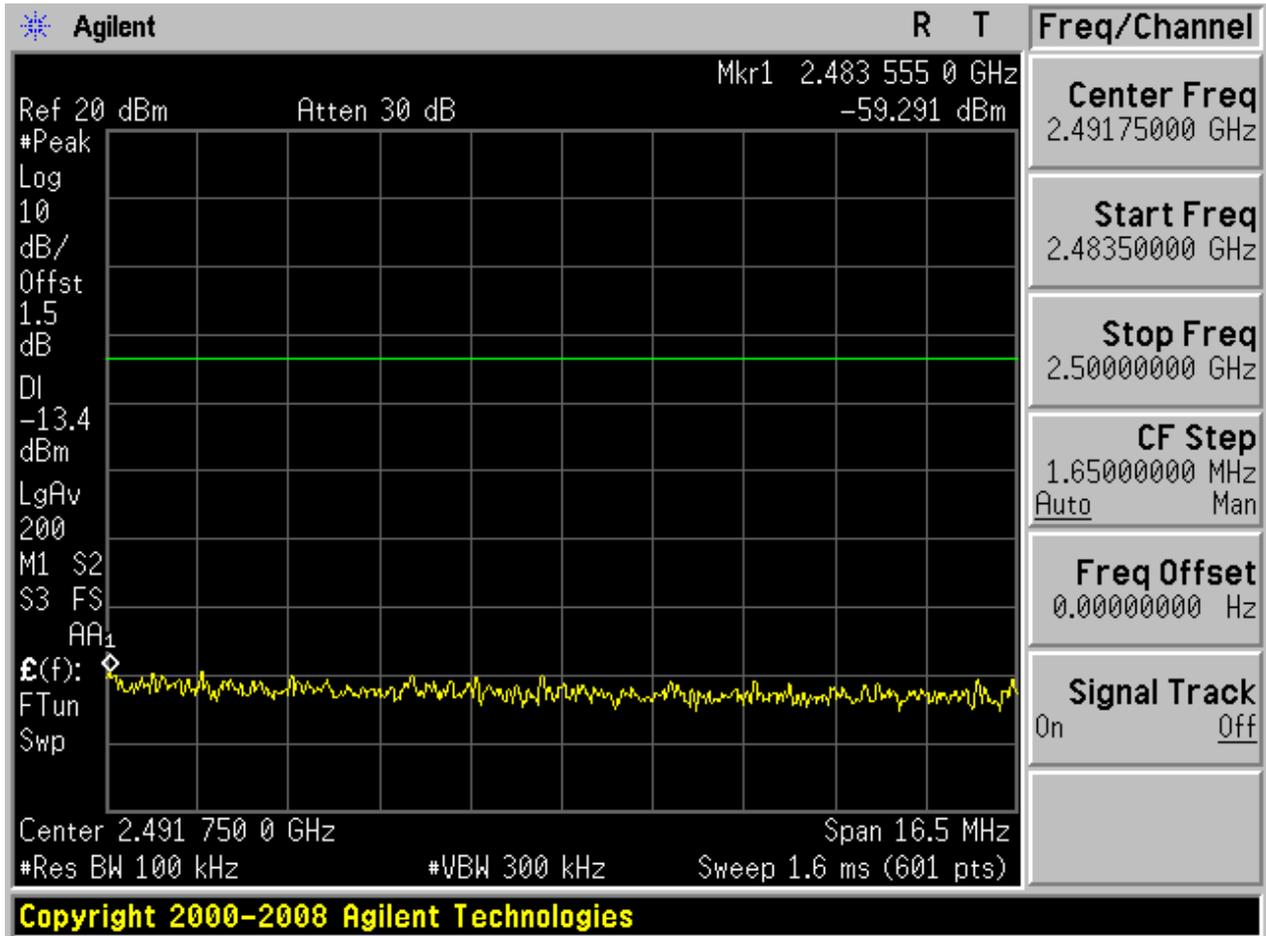


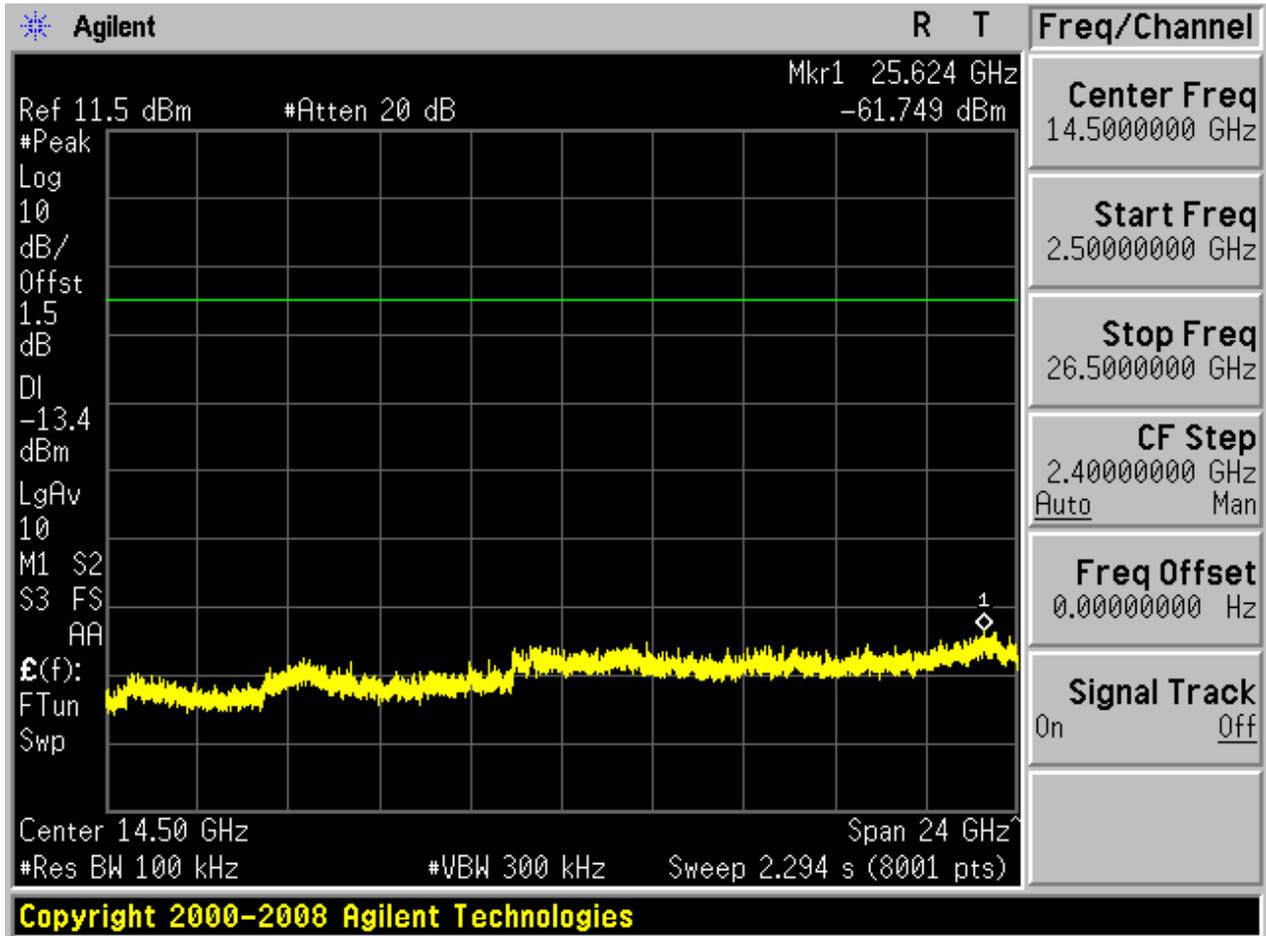




## 2.2 TM1\_DH5\_Ch19


### 2.2.1 Pref

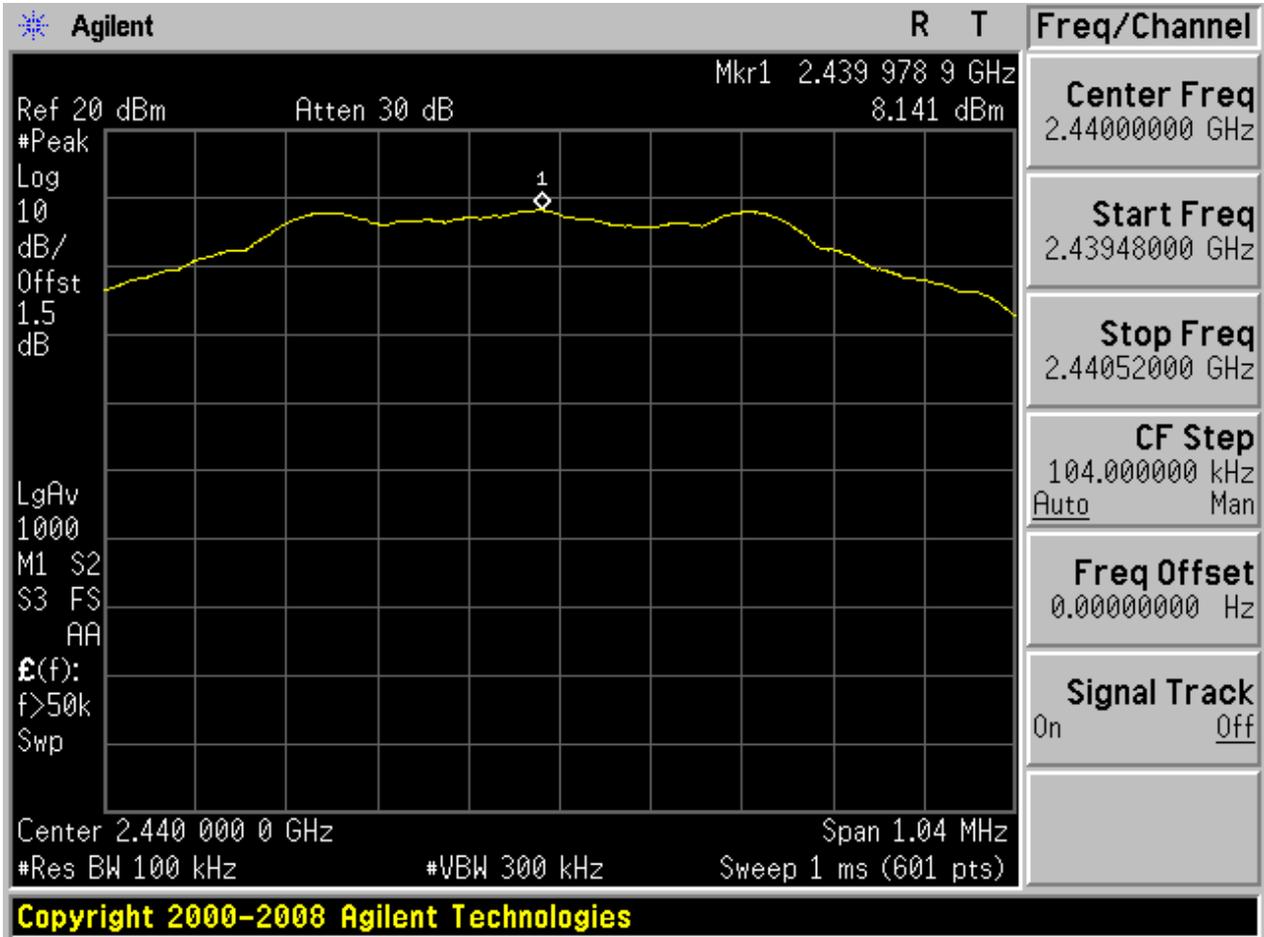






2.2.2 Puw

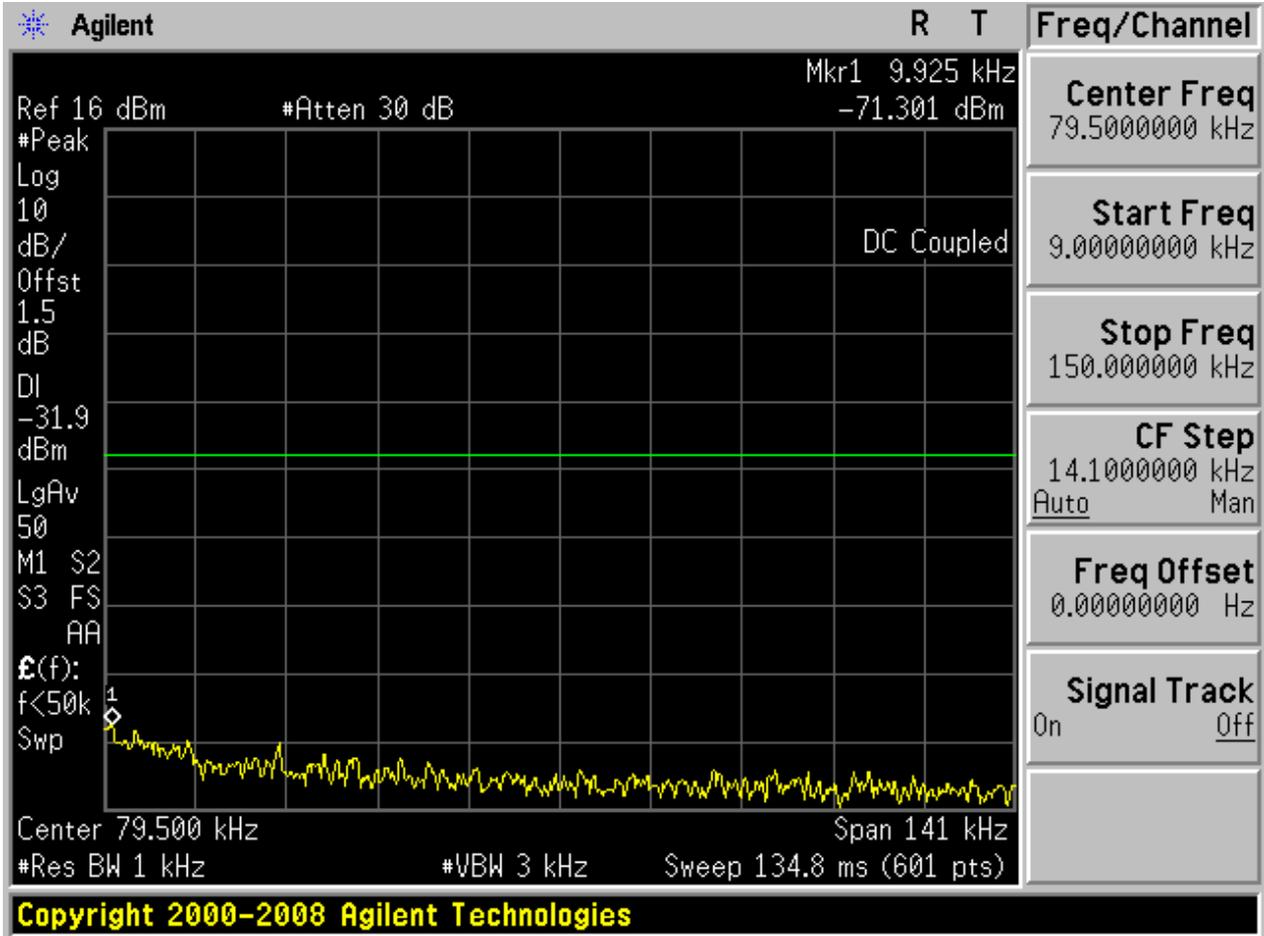


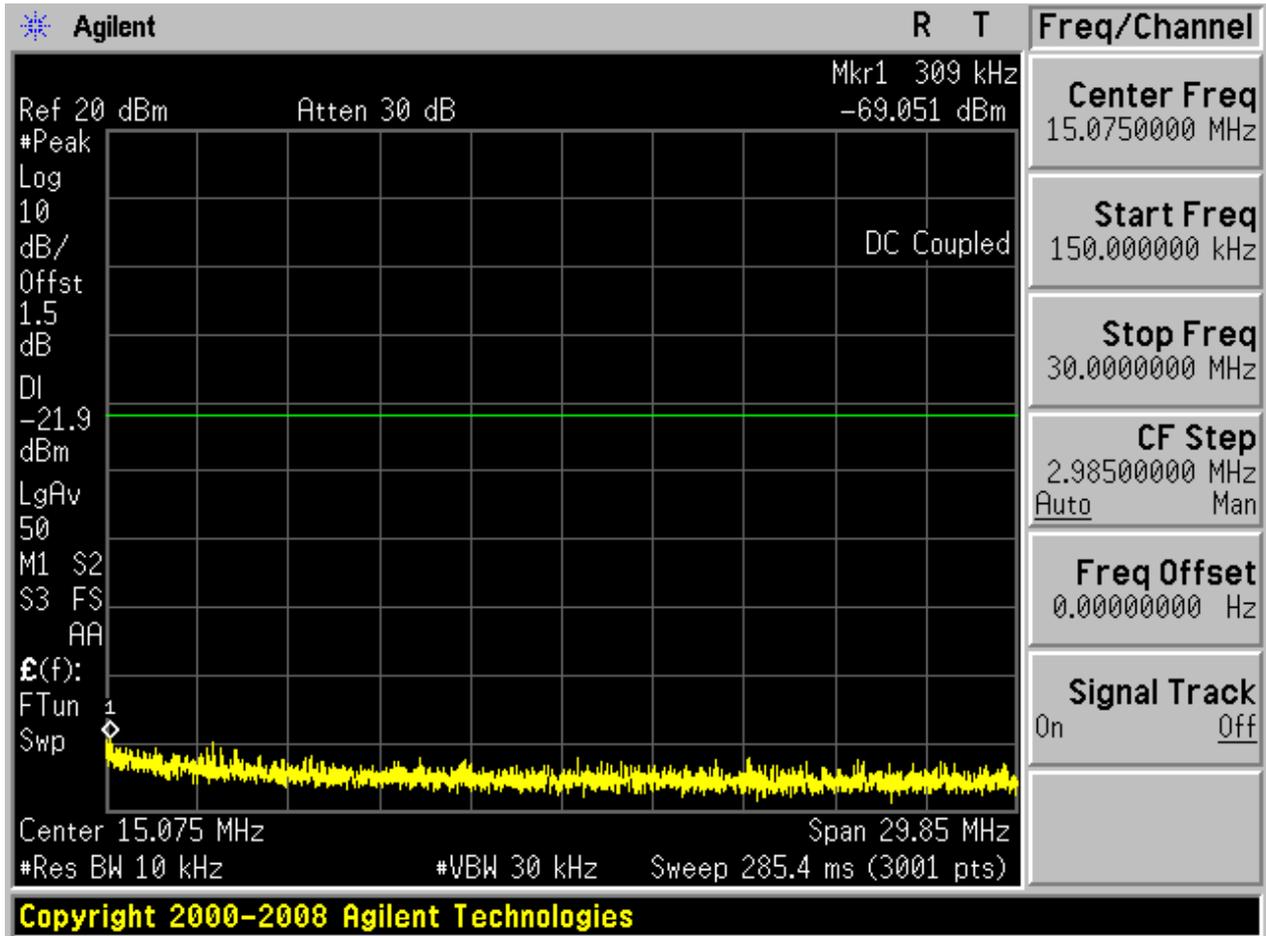

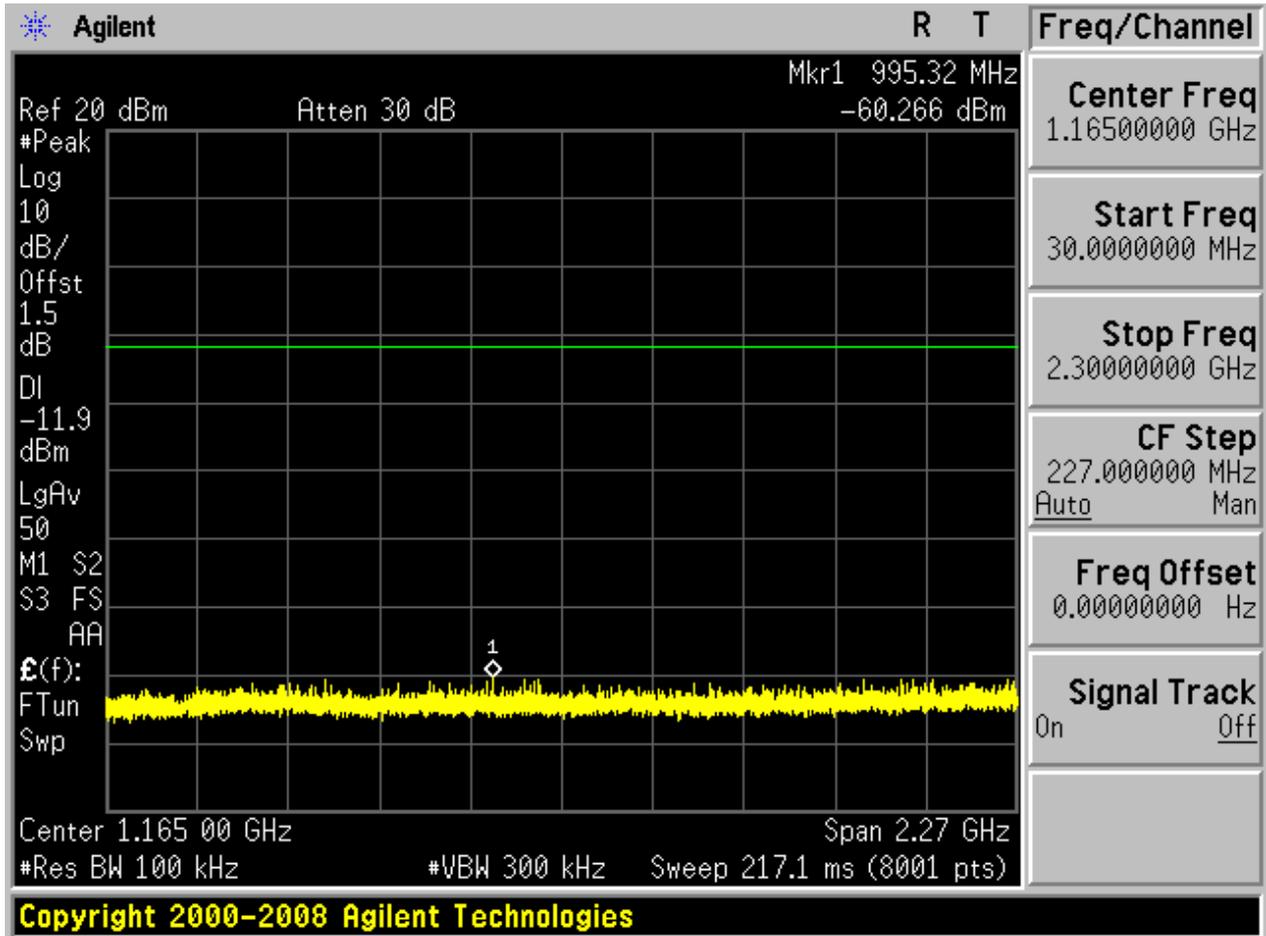

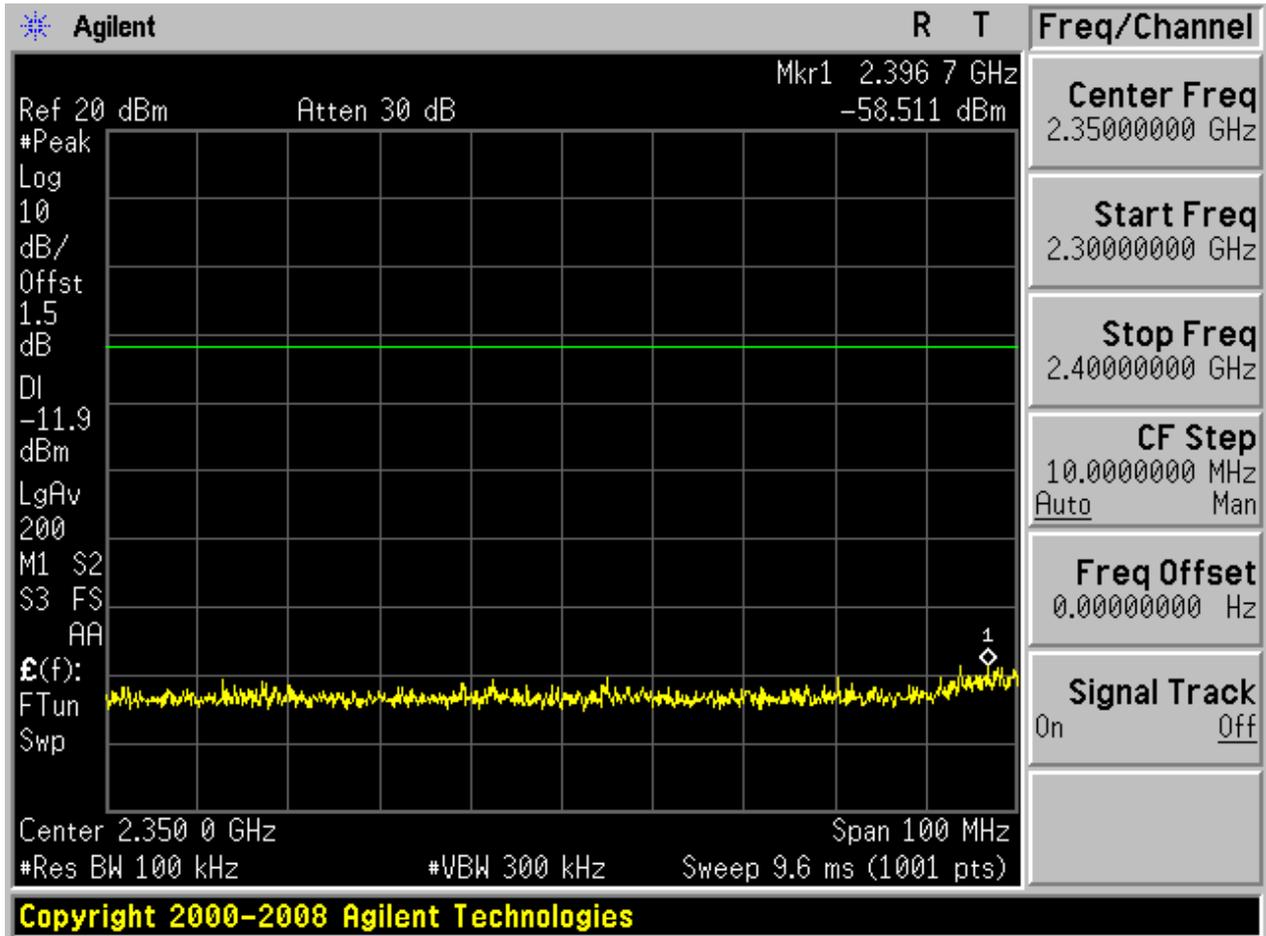

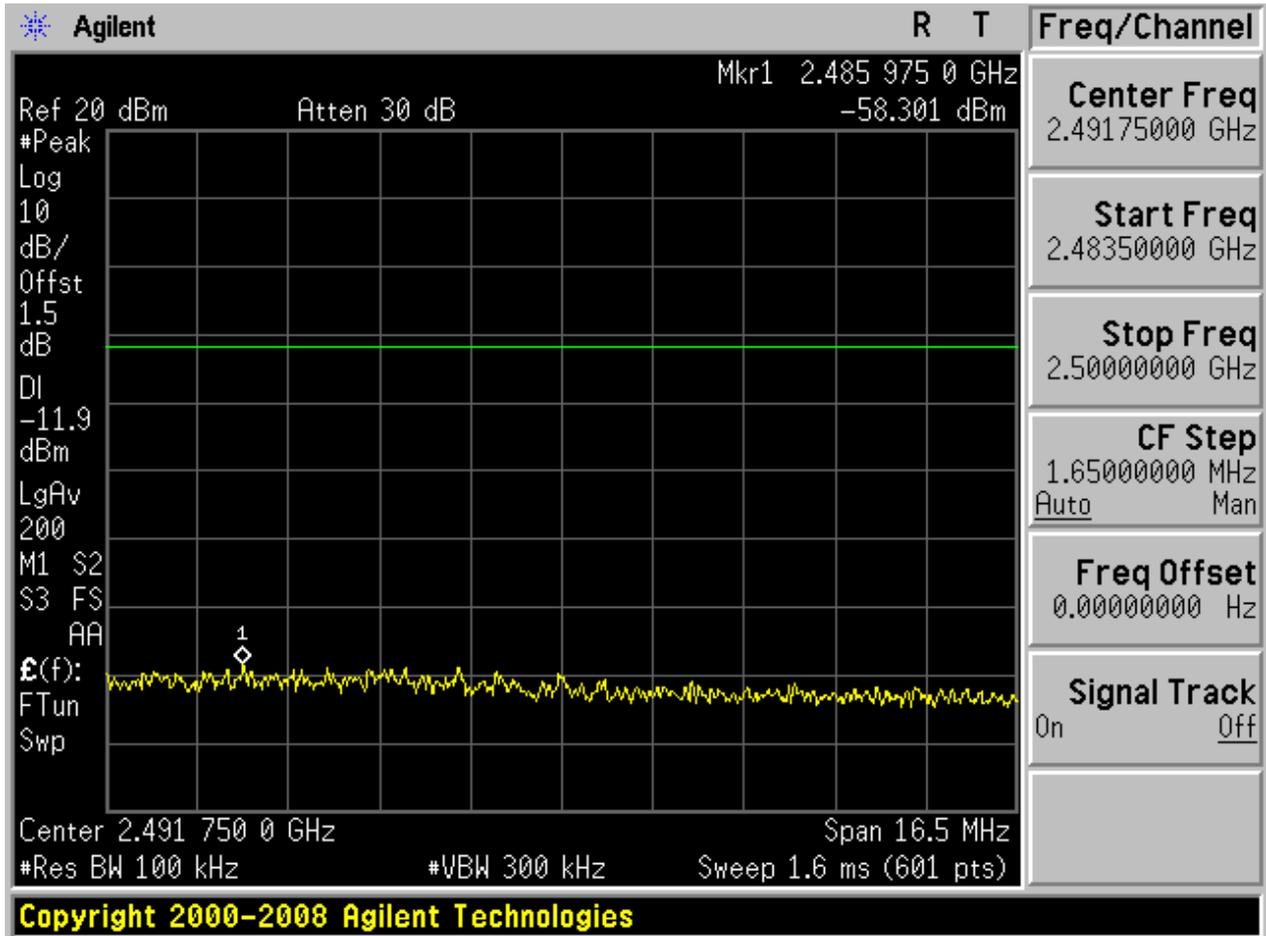


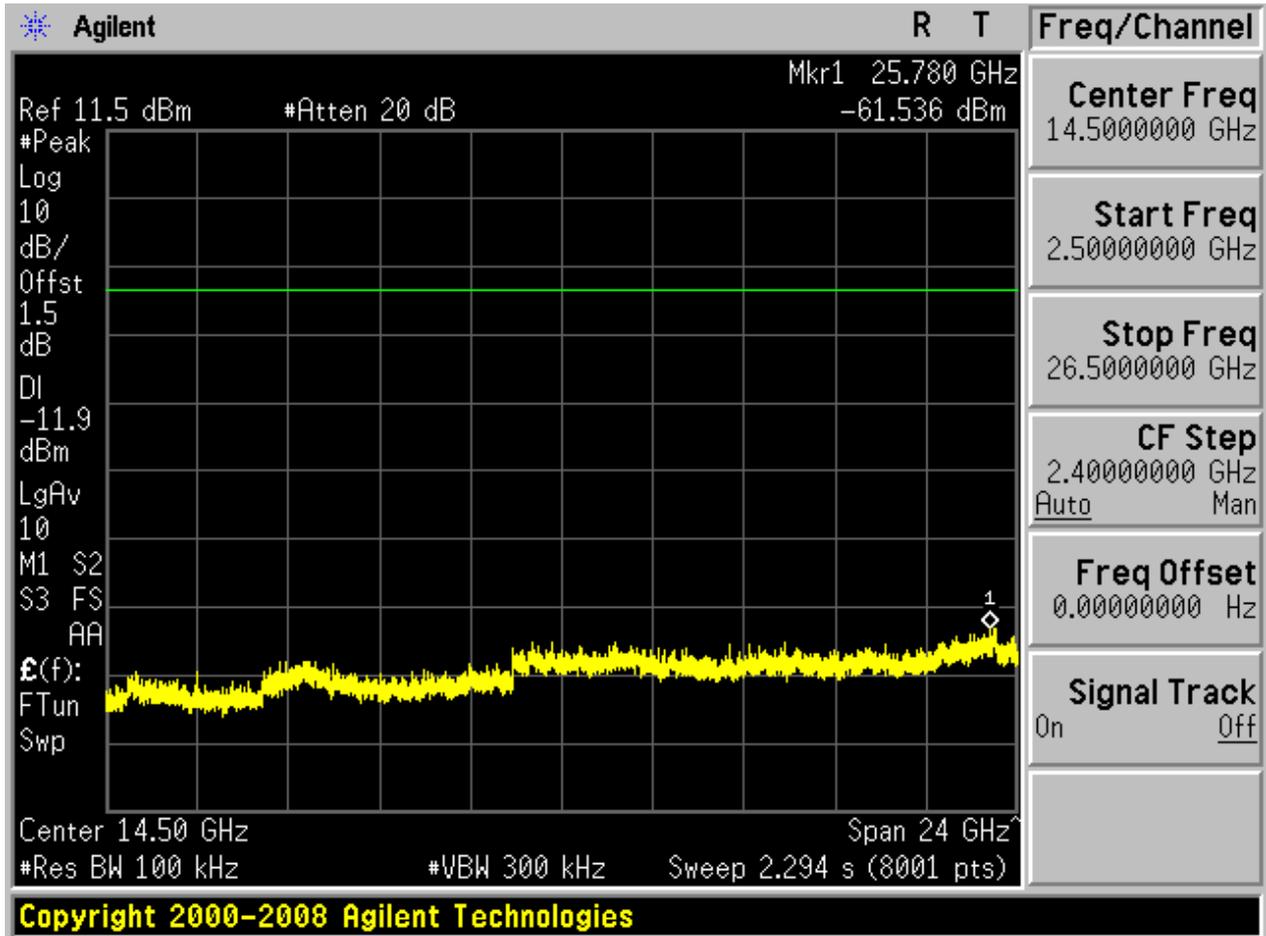




### 2.3 TM1\_DH5\_Ch39


#### 2.3.1 Pref

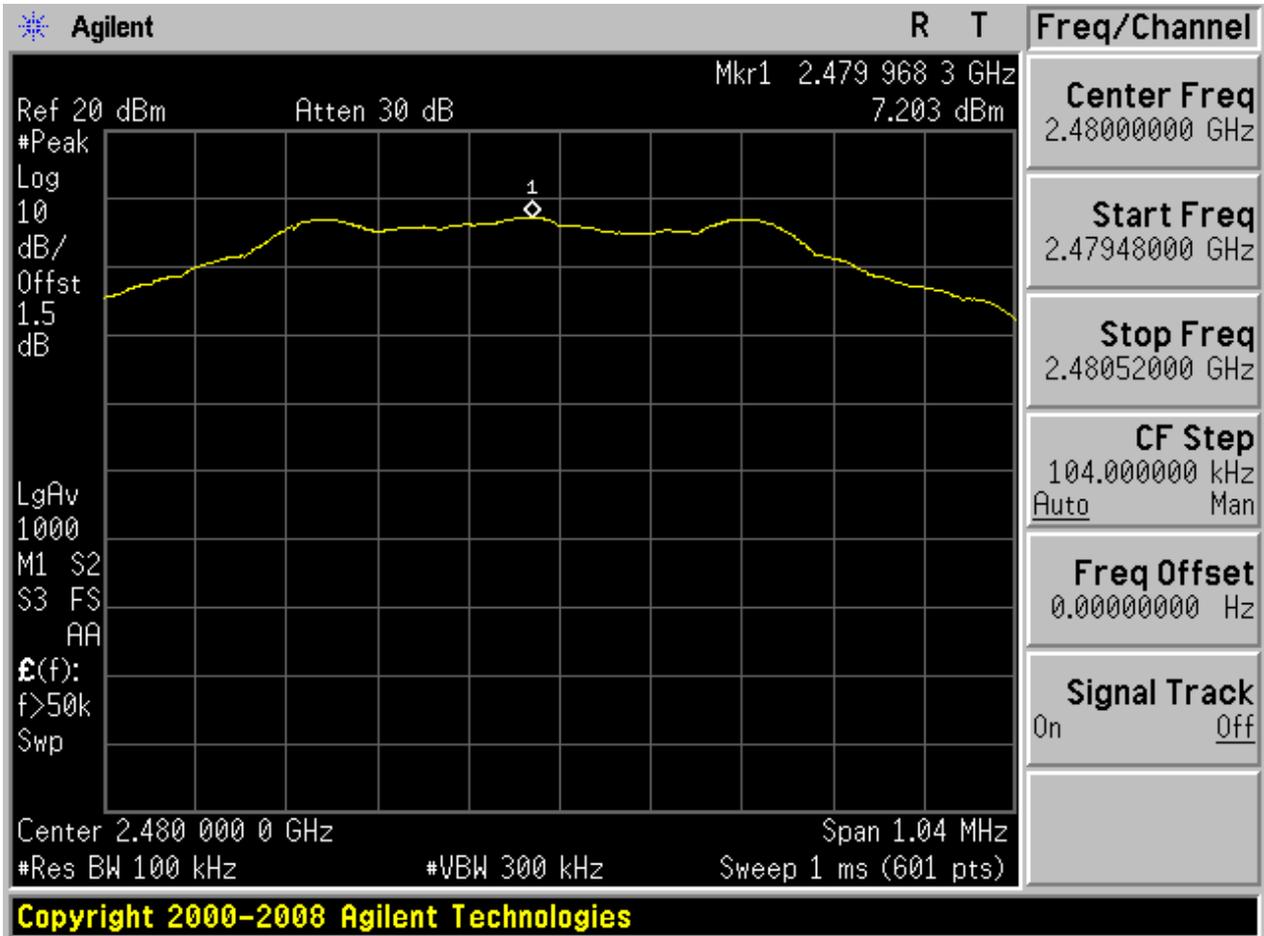






2.3.2 Puw

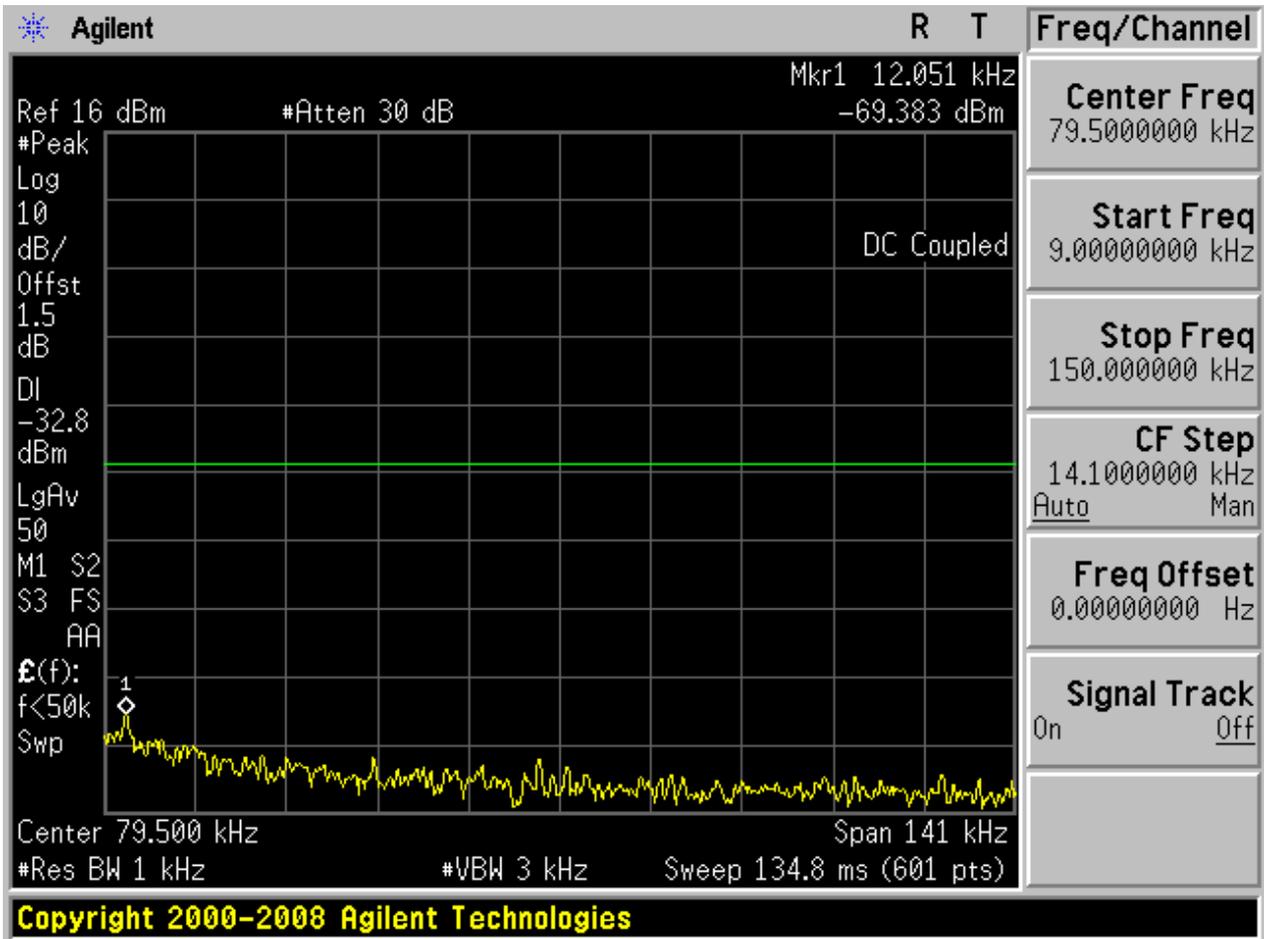


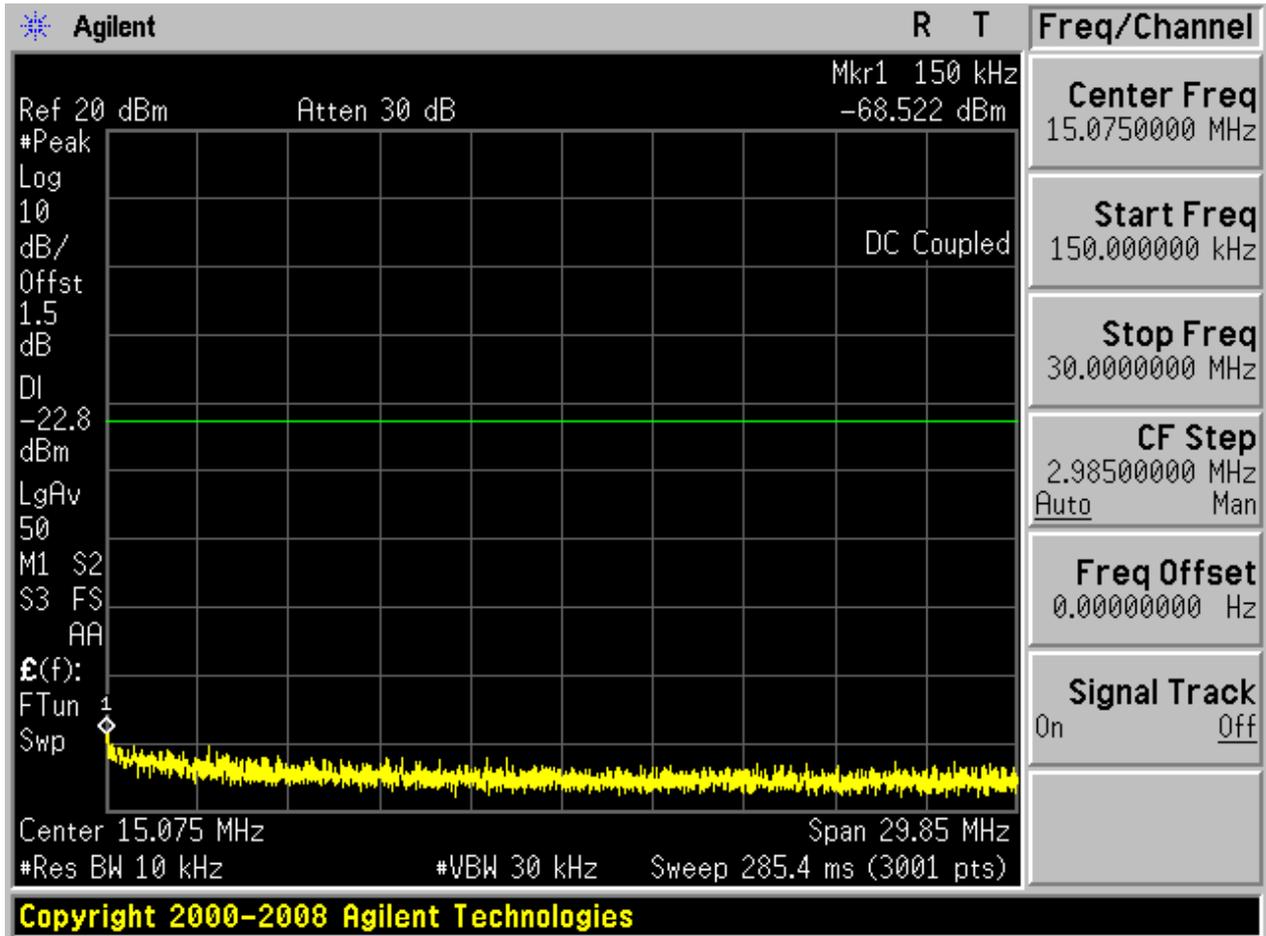

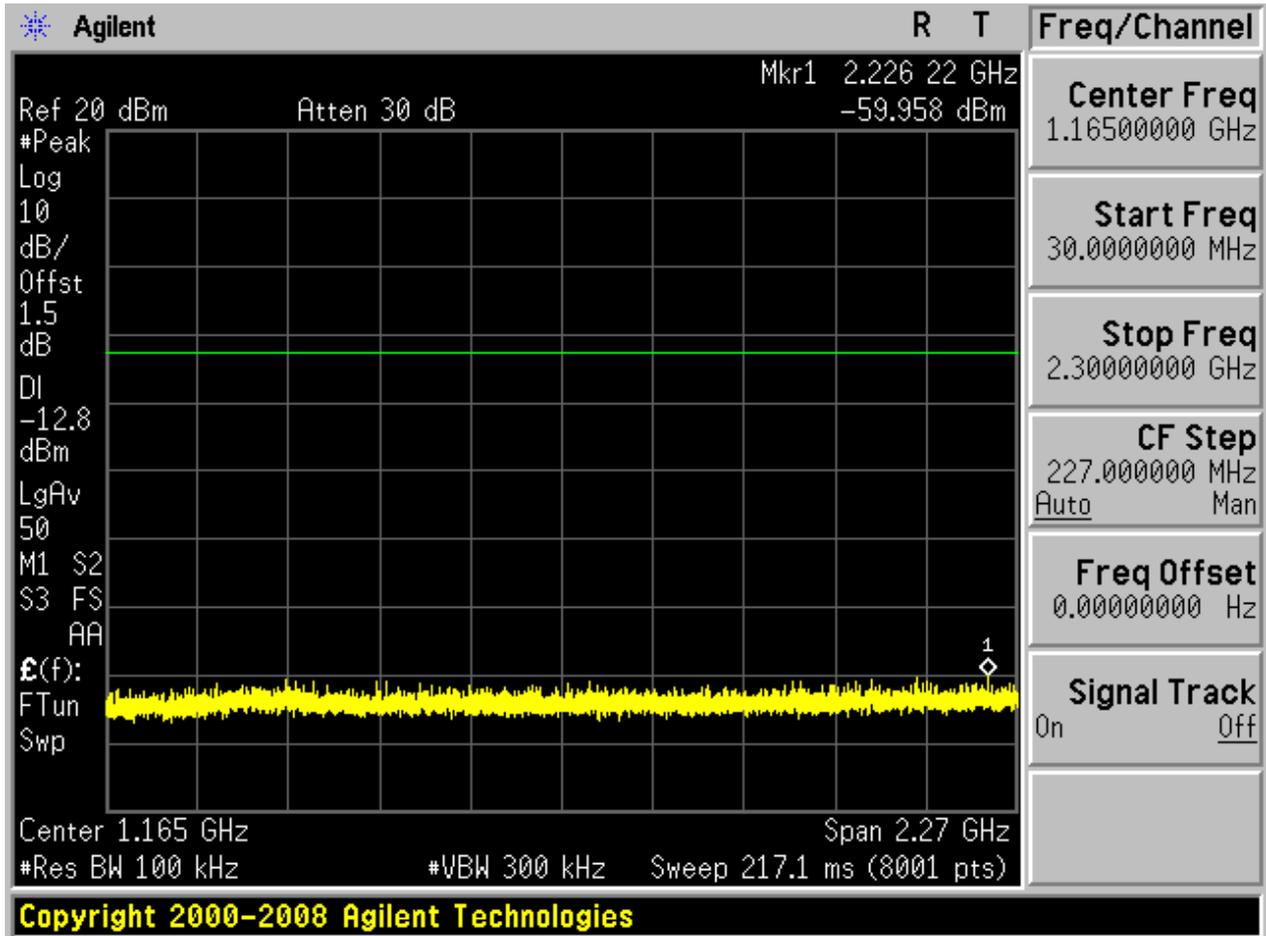

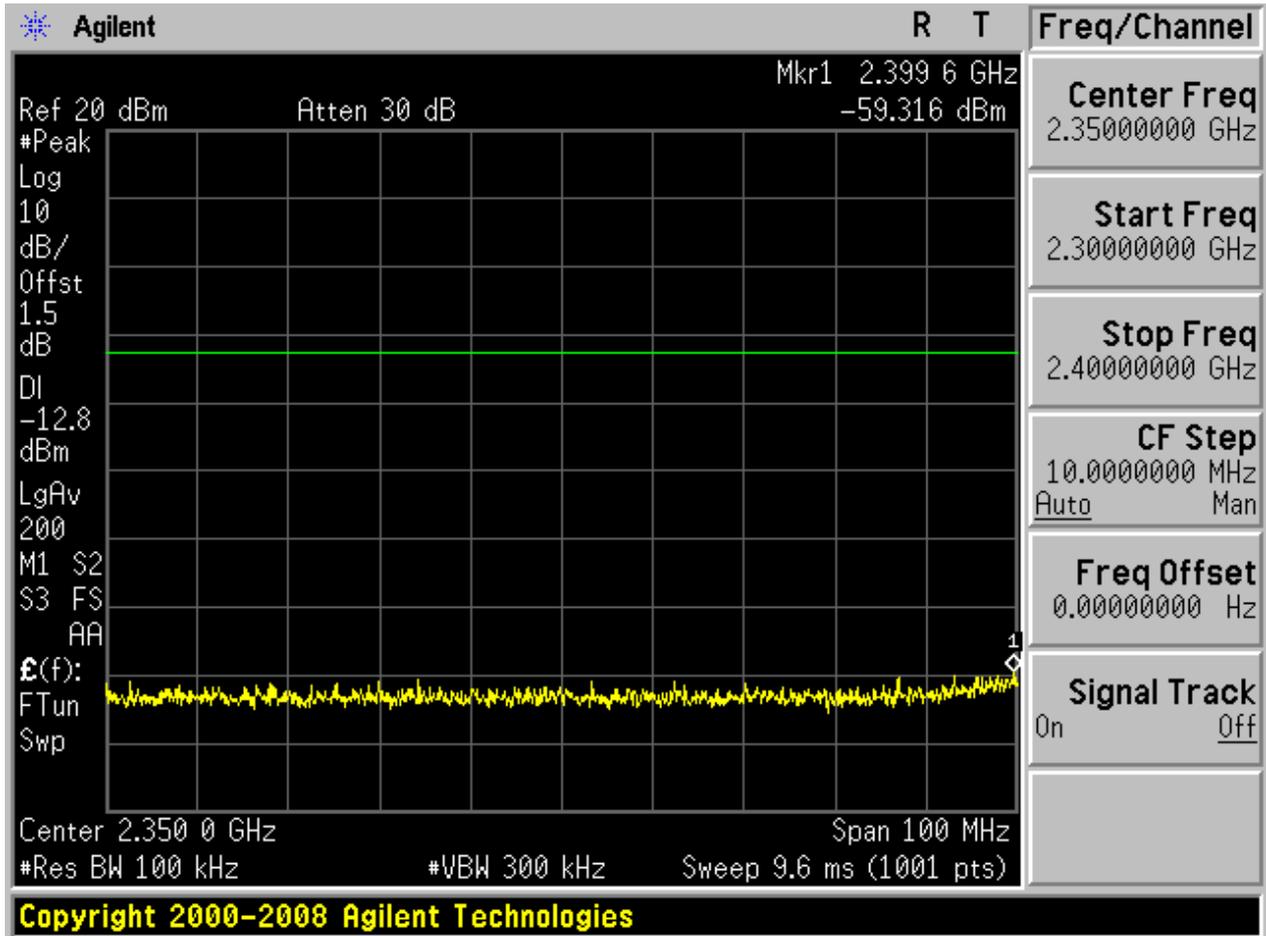

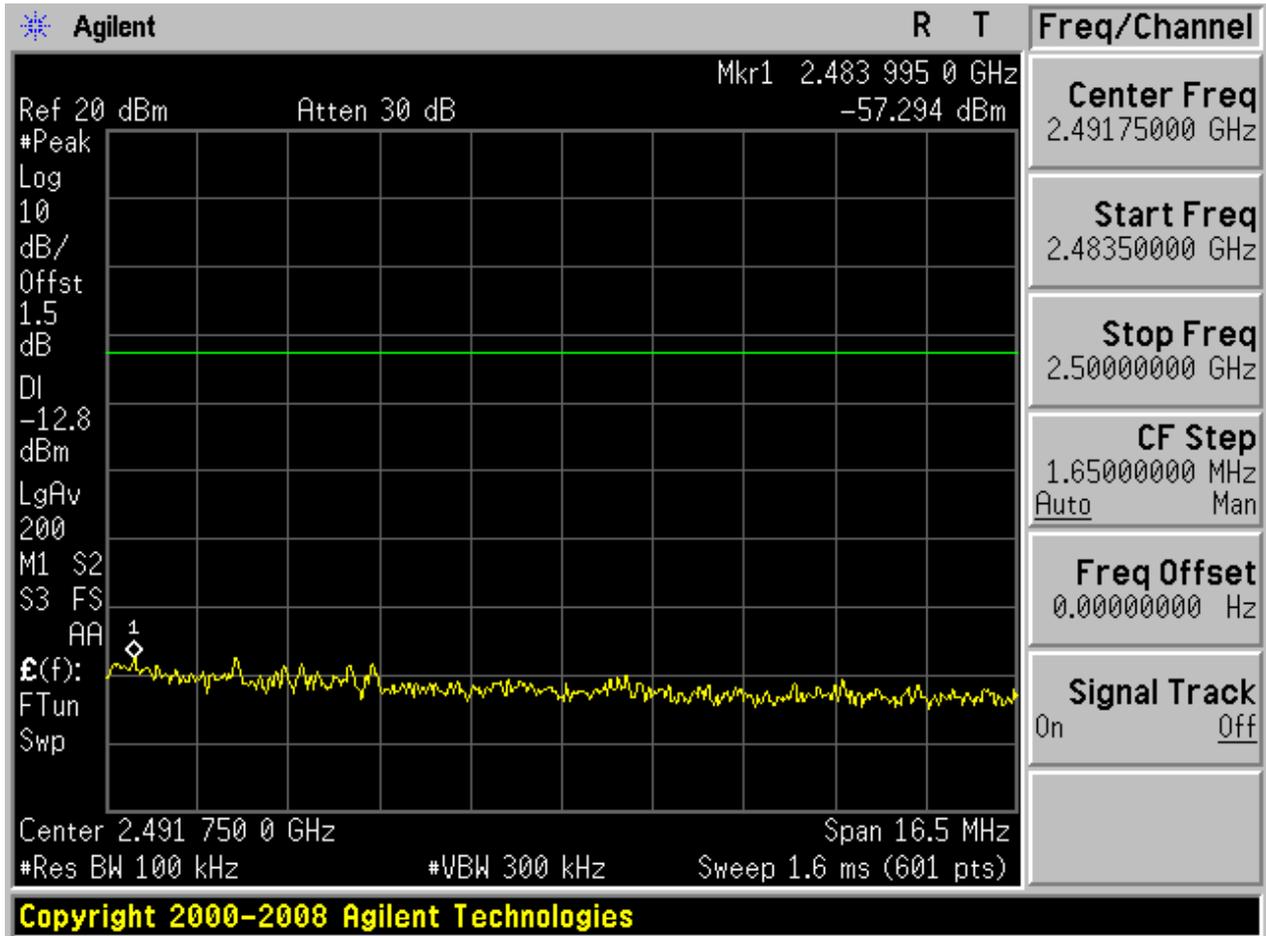

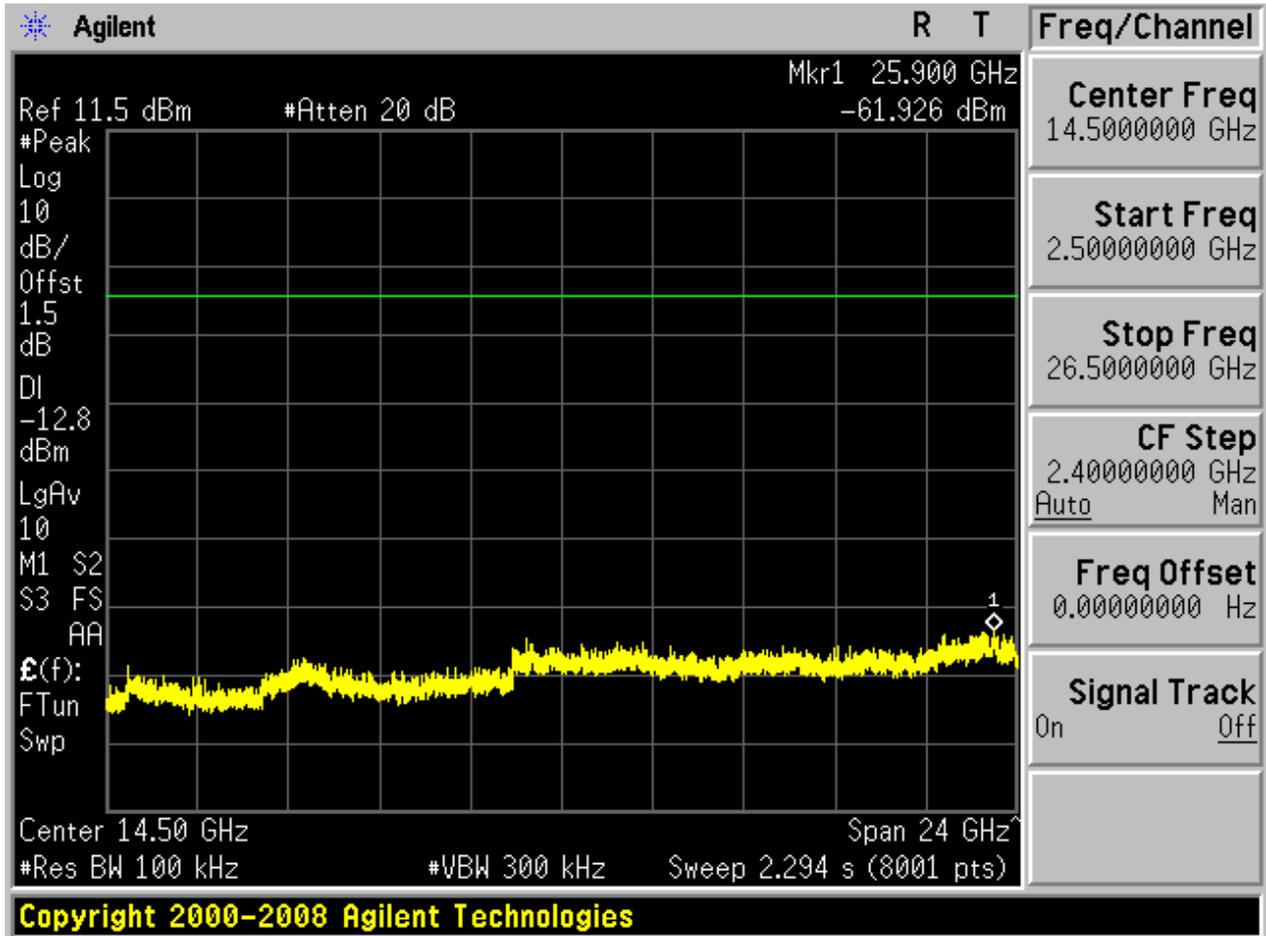




# Appendix F: Radiated Emissions in the Restricted Bands



### Part 1: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

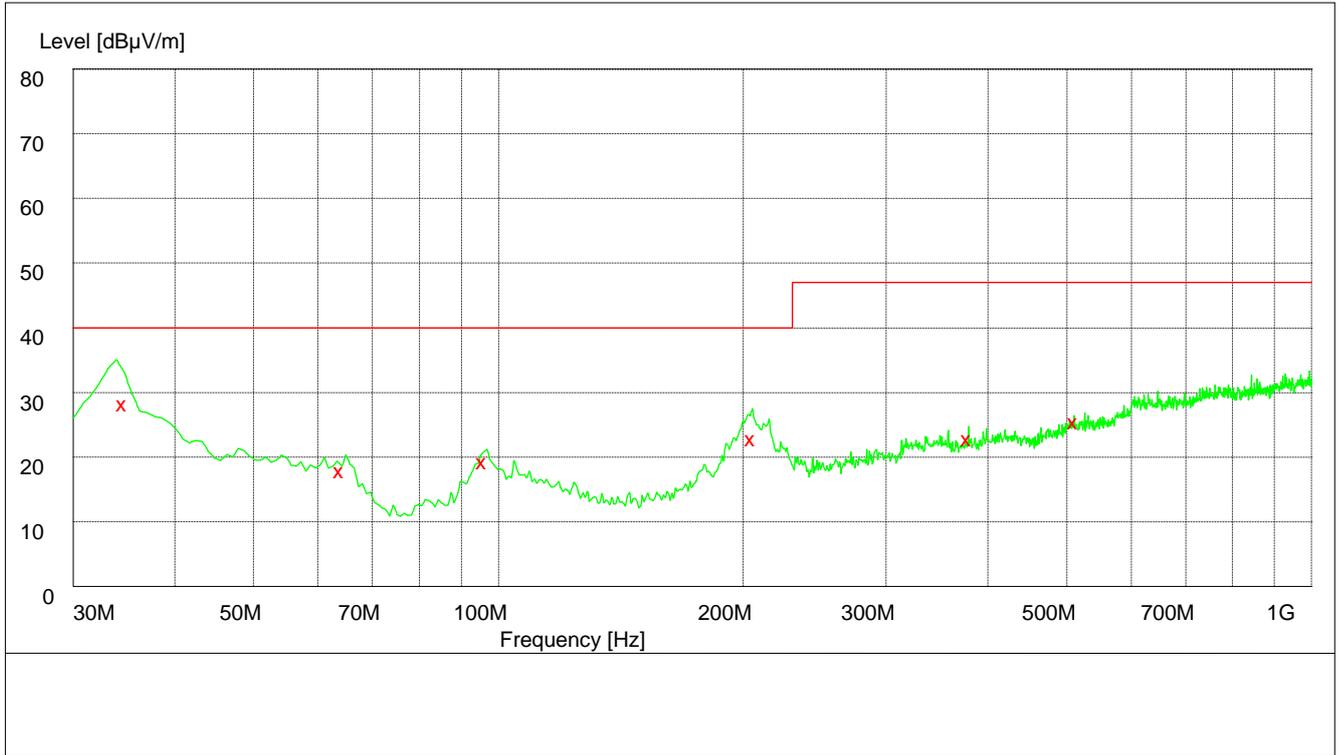


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Plarization
34.680000	29.80	14.4	40.0	10.2	103.0	112.00	VERTICAL
64.020000	19.30	11.9	40.0	20.7	107.0	117.00	VERTICAL
96.000000	20.70	12.9	40.0	19.3	103.0	210.00	VERTICAL
205.260000	24.30	12.6	40.0	15.7	100.0	346.00	VERTICAL
378.840000	24.20	17.0	47.0	22.8	149.0	330.00	VERTICAL
511.980000	26.80	19.5	47.0	20.2	194.0	286.00	VERTICAL



## Part 2: Testing Range of “18 GHz to 26.5 GHz”

Note: No peak found in pre- test.

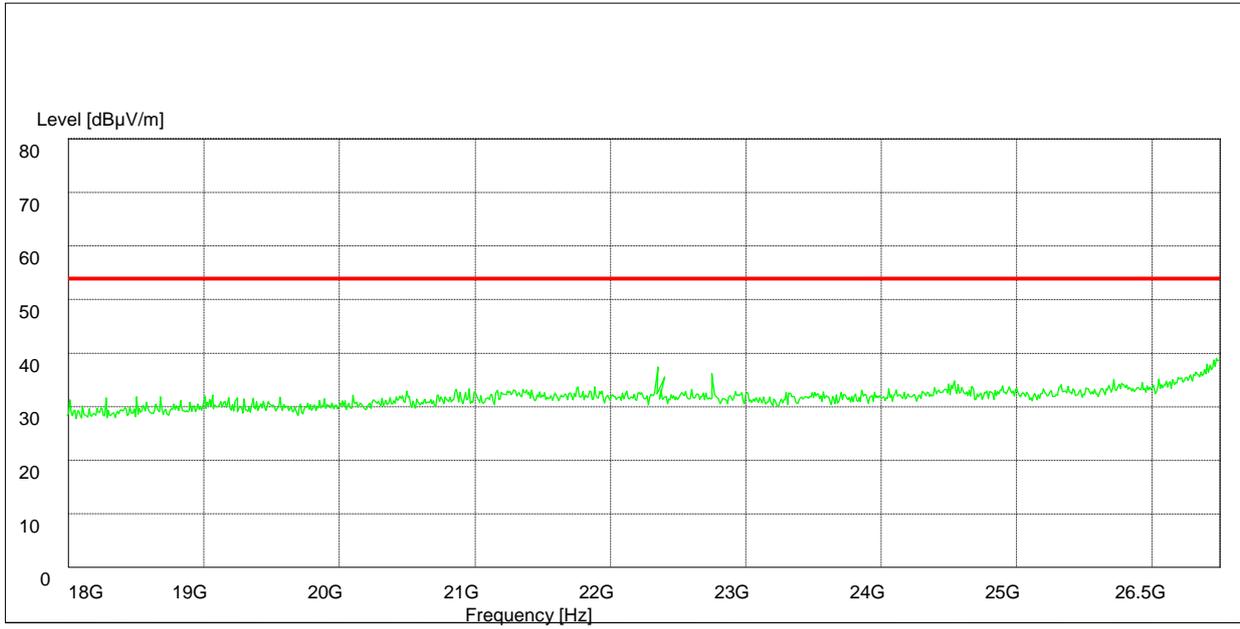


**Part 3: Testing Range of “2.3GHz to 2.5GHz”**

- Note 1: The testing range of “2.3 GHz to 2.5 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.
- Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dBμV/m) and Average Limit (54 dBμV/m).
- Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

**3 Test Mode:**

**3.1 Channel 00**

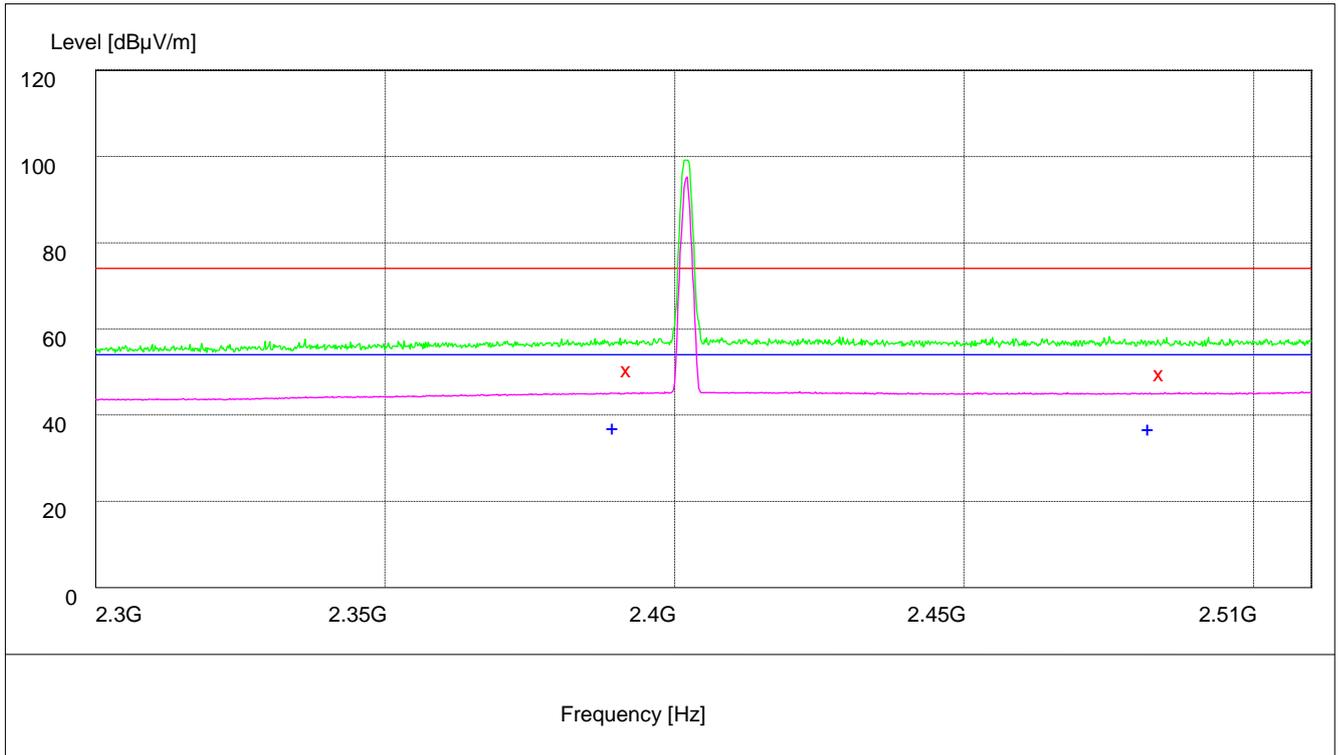

Note: The peak exceeds the limit line is carrier frequency.


MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2392.000000	52.70	34.7	74.0	21.3	182.0	104.00	HORIZONTAL
2484.000000	51.80	35.0	74.0	22.2	117.0	20.00	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2389.500000	39.40	34.7	54.0	14.6	105.0	360.00	HORIZONTAL
2482.000000	39.20	35.0	54.0	14.8	186.0	246.00	VERTICAL

### 3.2 Channel 39

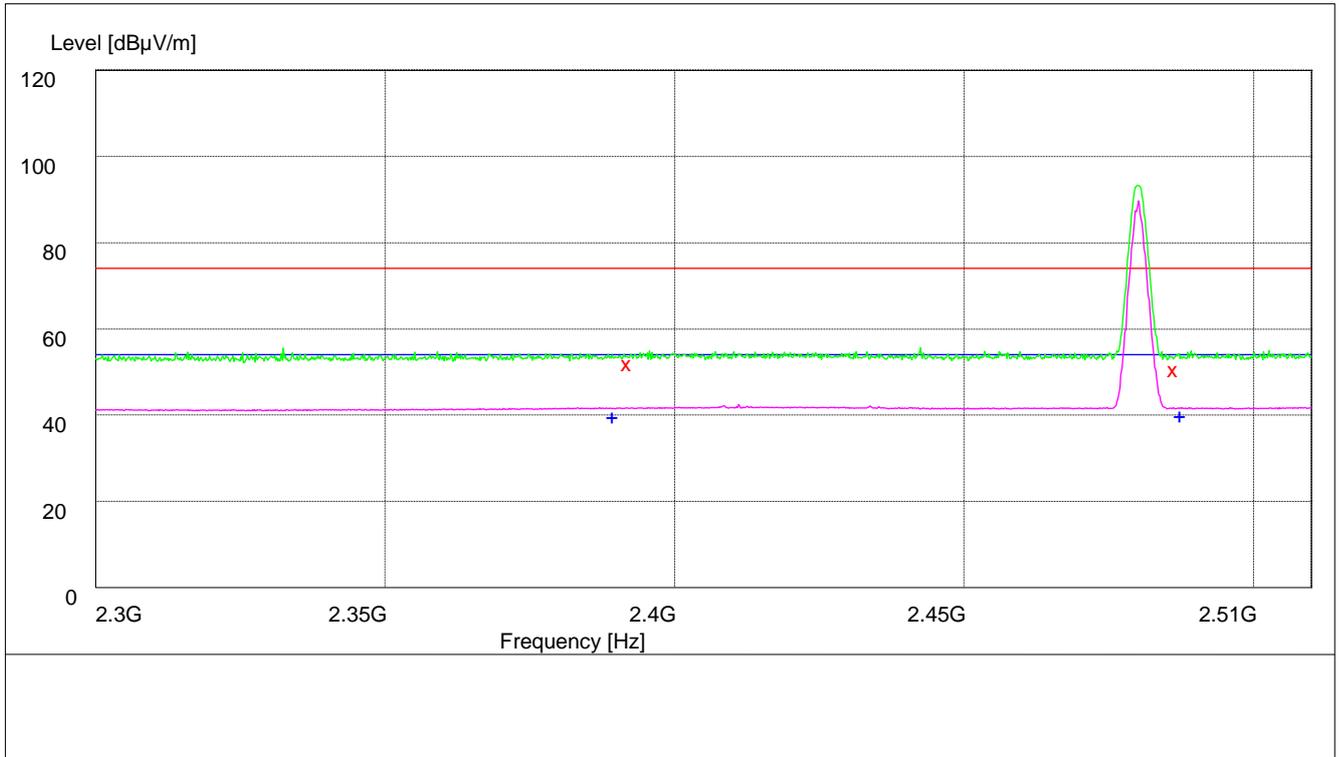

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.500000	52.80	34.7	74.0	21.2	140.0	59.00	VERTICAL
2486.500000	52.80	35.0	74.0	21.2	163.0	170.00	HORIZONTAL


MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	39.30	34.7	54.0	14.7	121.0	359.00	HORIZONTAL
2485.000000	39.50	35.0	54.0	14.5	100.0	140.00	VERTICAL

### 3.3

#### Part 4: Testing Range of “1 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “1 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “1 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).

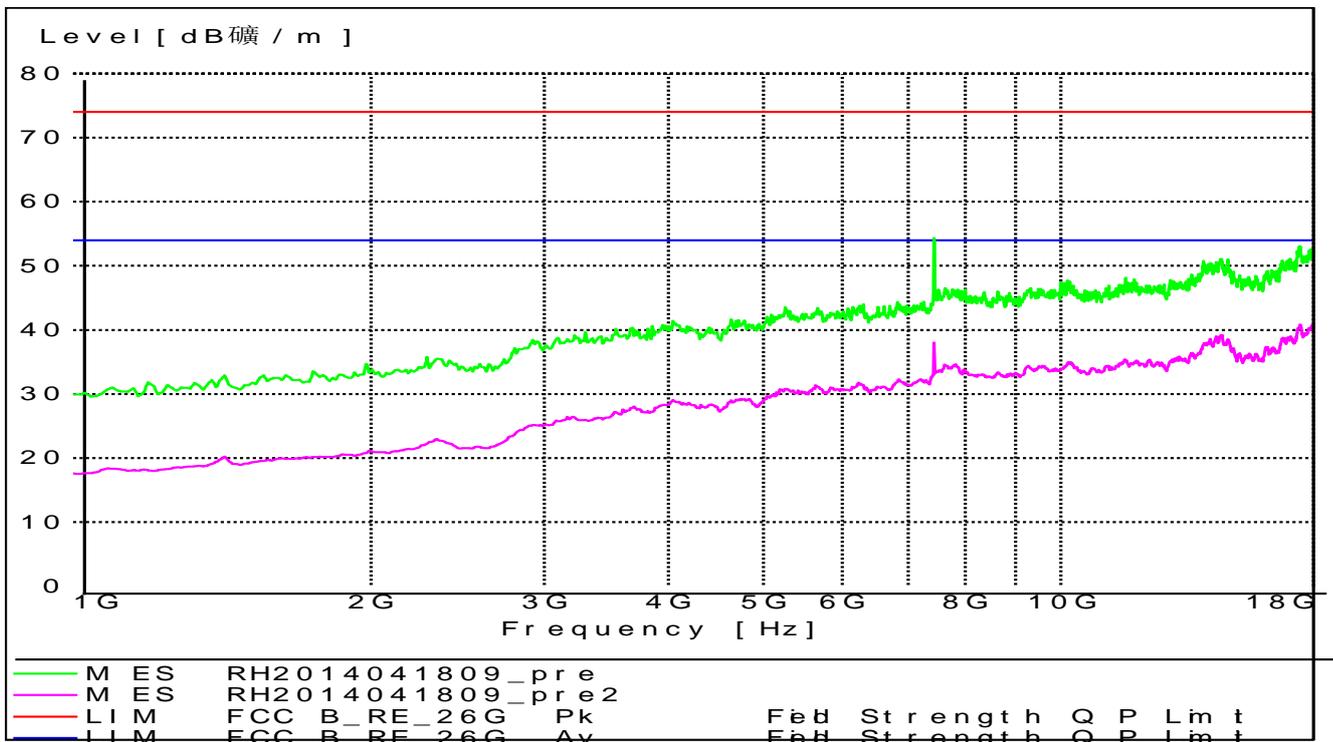




# Appendix G: AC Power Line Conducted Emissions

# Channel 19

CLASS B Voltage with ENV216

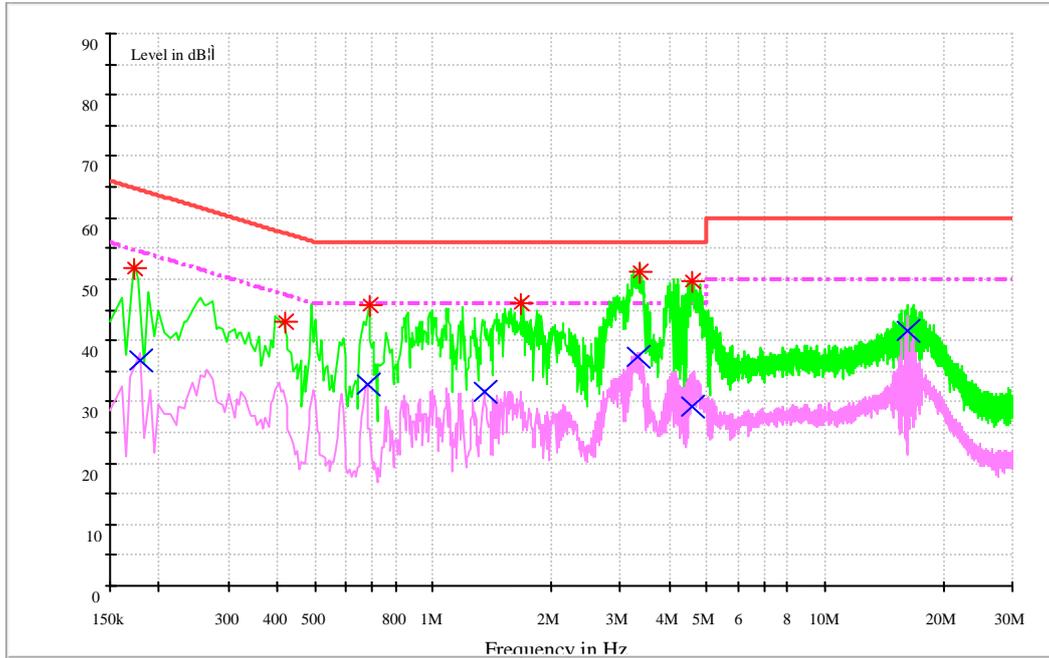

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV	Line	Transd dB	Margin dB	Limit dBμV	PE
0.172388	51.8	L1	9.7	12.8	64.6	FLO
0.422134	43.1	N	9.7	14.3	57.4	FLO
0.687322	45.7	N	9.7	10.3	56.0	FLO
1.676000	46.1	N	9.7	9.9	56.0	FLO
3.356952	51.1	N	9.7	4.9	56.0	FLO
4.554034	49.6	N	9.8	6.4	56.0	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV	Line	Transd dB	Margin dB	Limit dBμV	PE
0.179880	36.8	L1	9.7	17.6	54.5	FLO
0.679838	32.7	N	9.7	13.3	46.0	FLO
1.355194	31.7	N	9.7	14.3	46.0	FLO
3.306638	37.3	N	9.7	8.7	46.0	FLO
4.601104	29.3	L1	9.8	16.7	46.0	FLO
16.190664	41.5	L1	10.0	8.5	50.0	FLO

Note: Level= Reading level+ Transd (cable loss + correction factor).The reading level is used to calculate by software which is not shown in the sheet.

END