



FCC RF Test Report

Product Name: HSDPA Module

Model Number: MU509-g

Report No: SYBH(Z-RF)025092011-2001

FCC ID: QISMU509G

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518



Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Notice 2

Modification Information:

Table 1 Modification Information

Modification Information	1	
	2	
	3	<i>Not Applicable!</i>
	4	<i>Not Applicable!</i>
	5	
	6	
	7	



Contents

1	<u>Summary</u>	6
2	<u>Product Description</u>	7
2.1	PRODUCTION INFORMATION	7
2.2	MODIFICATION INFORMATION	7
3	<u>Test Site Description</u>	8
3.1	TESTING PERIOD	8
3.2	GENERAL SET UP DESCRIPTION	8
4	<u>Product Description</u>	9
4.1	TECHNICAL CHARACTERISTICS	9
4.2	EUT IDENTIFICATION LIST	11
5	<u>Main Test Instruments</u>	12
6	<u>Transmitter Measurements</u>	13
6.1	EFFECTIVE RADIATED POWER OF TRANSMITTER (ERP)	13
6.2	CONDUCTED POWER OF TRANSMITTER	17
6.3	MODULATION CHARACTERISTICS	20
6.4	OCCUPIED BANDWIDTH	22
6.5	BAND EDGES COMPLIANCE	25
6.6	SPURIOUS EMISSION AT ANTENNA TERMINAL	27
6.7	RADIATED SPURIOUS EMISSIONS	30
6.8	FREQUENCY STABILITY	33
7	<u>System Measurement Uncertainty</u>	37
8	<u>Appendices</u>	38



1 Summary

The table below summarizes the measurements and results for the EUT. Detailed results and descriptions are shown in the following pages.

Table 2 Summary of results

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
2.1046	22.913	Effective Radiated Power of Transmitter	PASS
2.1046	22.913	Conducted Power of Transmitter	PASS
2.1047	/	Modulation Characteristics	PASS
2.1049	/	Occupied Bandwidth	PASS
2.1051	22.917	Band Edges compliance	PASS
2.1051	22.917	Spurious Emission at Antenna Terminal	PASS
2.1053	22.917	Radiated Spurious Emissions	PASS
2.1055	22.355	Frequency Stability	PASS



2 Product Description

2.1 Production Information

2.1.1 General Description

MU509-g HSDPA/WCDMA/EDGE/GPRS/GSM dual mode Wireless Module is subscriber equipment in the UMTS/GSM system. MU509-g implement such functions as RF signal receiving/transmitting, HSDPA/WCDMA and EDGE/GPRS/GSM protocol processing, data service etc. Externally it provides LGA interface.

2.1.2 Support function and Service

The EUT support the function and service as follows:

Table 3 Service and Test mode List

Service Name	Characteristic	Corresponding Test Mode	Note
Data	Modulation: GMSK	TM1	GPRS/GSM
Data	Modulation: 8PSK	TM2	EDGE
Data	Modulation: QPSK	TM3	WCDMA
Data	Modulation: QPSK	TM4	HSDPA

Note: * The specified GPRS test conditions & settings are defined in 3GPP TS51.010 V5.4.0 and the EDGE test conditions & settings are defined in 3GPP TS51.010 V5.4.0. The WCDMA test condition & settings are defined in 3GPP TS 34.121 V8.7.0:2009.

2.2 Modification Information

For original equipment, following table is not application.

Table 4 Modification Information

Model Number	Board/Module	Original Version	New Version	Modify Information
Not applicable				



3 Test Site Description

The test site of:

***Huawei Technologies Co. Ltd.
P.O. Box 518129
Huawei base, Bantian,
Longgang District, Shenzhen, China***

3.1 Testing Period

The test have been performed during the period of

Sep.27, 2011 – Sep.28, 2011

3.2 General Set up Description

TM1: GPRS/GSM Mode with GMSK Modulation

TM2: EDGE Mode with 8PSK Modulation

TM3: WCDMA Mode with QPSK Modulation

TM4: HSDPA Mode with QPSK Modulation



4 Product Description

4.1 Technical Characteristics

4.1.1 Frequency Range

Table 5 Frequency Range

Uplink band:	824 to 849 MHz
Downlink band:	869 to 894 MHz

4.1.2 Channel Spacing / Separation

Table 6 Channel Spacing / Separation

	EDGE/GPRS/GSM	WCDMA/HSDPA
Channel raster	200k Hz	200k Hz
Channel spacing:	200k Hz	5MHz

4.1.3 Type of Emission

Table 7 Type of Emission

	EDGE	GPRS/GSM	WCDMA/HSDPA
Emission Designation:	300KG7W	300KGXW	5M00F9W

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

4.1.4 Environmental Requirements

Table 8 Environmental Requirements

Minimum temperature:	- 20 °C
Maximum temperature:	+ 70 °C
Relative Humidity:	5%-95%RH

4.1.5 Power Source

Table 9 Power Source

AC voltage nominal:	 120 V
AC voltage range	 100 V to  240 V
AC current maximal:	1 A

4.1.6 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (9).

Please reference the document Tune-up Procedure in TCF.

4.1.7 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8).

The voltage and current in the final RF stage is:

Table 10 Applied RF module DC Voltages and Currents

Voltage:	 +3.8V
Current:	100mA According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8)



4.2 EUT Identification List

4.2.1 Board Information

Table 11 Board Information

HSDPA Module		
MU509-g		
Board and Module		
Hardware Version	Serial Number	Software Version
MD1MU509M	3DA6RB1183000147	11.813.03.01.00

4.2.2 FCC Identification

Grantee Code: QIS
Product Code: MU509-g
FCC Identification: QISMU509G



5 Main Test Instruments

Table 12 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sep.27,2012
Universal Radio Communication Tester	R&S	CMU200	105822	Oct.24,2011
Wireless Communication Test set	Agilent	N4010A	MY49081592	Dec.14,2011
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug.04,2012
Signal Analyzer	R&S	FSQ31	200021	Sep.27,2012
Temperature Chamber	WEISS	WKL64	24600294	Jan.25,2012
Signal generator	Agilent	E8257D	MY49281095	Jul.09,2012
Vector Signal Generator	R&S	SMU200A	104162	Sep.07,2012
Test receiver	R&S	ESU26	36090302083	Jun.24,2012
EMI Test receiver	R&S	FSQ43	100048	Jun.23,2012
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	919/1009	Dec.13,2011
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	Dec.13,2011
Horn Antenna	R & S	HF906	359287/005	May.07, 2012
Horn Antenna	R & S	HF906	359287/006	Apr.27, 2012
Horn Antenna	R & S	HF906	100684	Jun.28,2012
Broadband Antenna	SCHAFFNER	CBL 6112B	2536	Sep.21, 2012
Broadband Antenna	SCHAFFNER	CBL 6112B	2941	Jun.20, 2012
Broadband Antenna	SCHAFFNER	VULB 9163	9163-357	Sep.28,2012
Horn Antenna	ETS-LINDGREN	3160	60008	Sep.20,2012
Horn Antenna	ETS-LINDGREN	3160	91989	Sep.28,2012

6 Transmitter Measurements

6.1 Effective Radiated Power of Transmitter (ERP)

6.1.1 Test Conditions

Table 13 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25 °C
Relative humidity:	55%
Test Configurations:	TM1/TM2/TM3 at frequency B, M, T

6.1.2 Test Specifications and Limits

6.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 22.913

6.1.2.2 Supporting Standards

Table 14 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.1.2.3 Limits

Compliance with part 22.913, mobile/portable stations are limited to 7 watts ERP peak power.

The calculated longitude ERP by following formula: $ERP(\text{dBm}) = 10 \cdot \log(ERP_{\text{in mWatts}})$.

Table 15 Limits

Maximum Output Power (Watts)	< 7 Watts
Maximum Output Power (dBm)	< 38.5 dBm


6.1.3 Test Method and Setup

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, ERP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the wireless communication tester CMU200 via the air interface. The band class is set as GSM850M.
- (b) Test the Radiated maximum output power by the CMU200 received from test antenna.

- (c) Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on CMU200, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

Test setup

Step 1: Pre-test

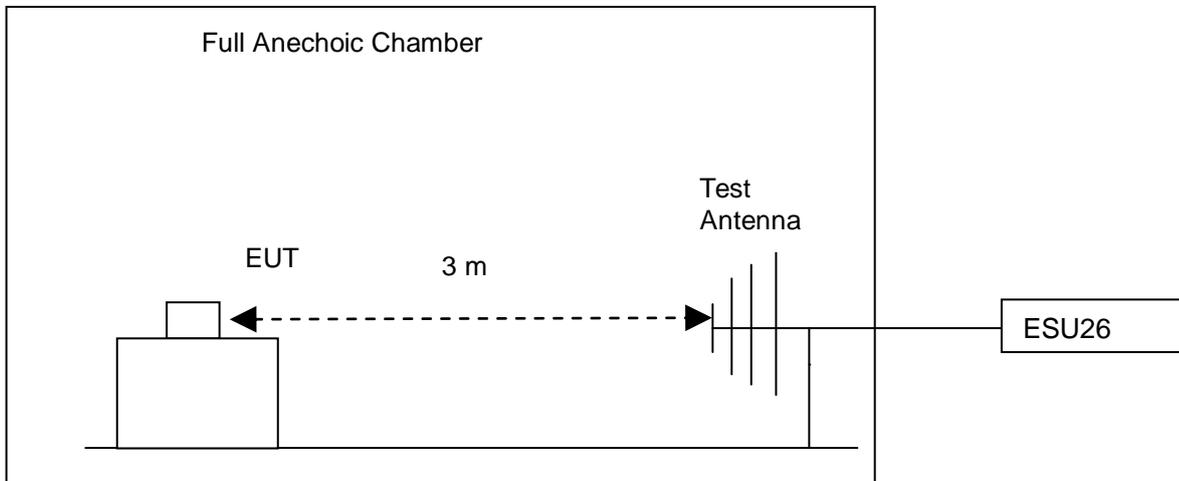

Step 2: Substitution method to verify the maximum ERP

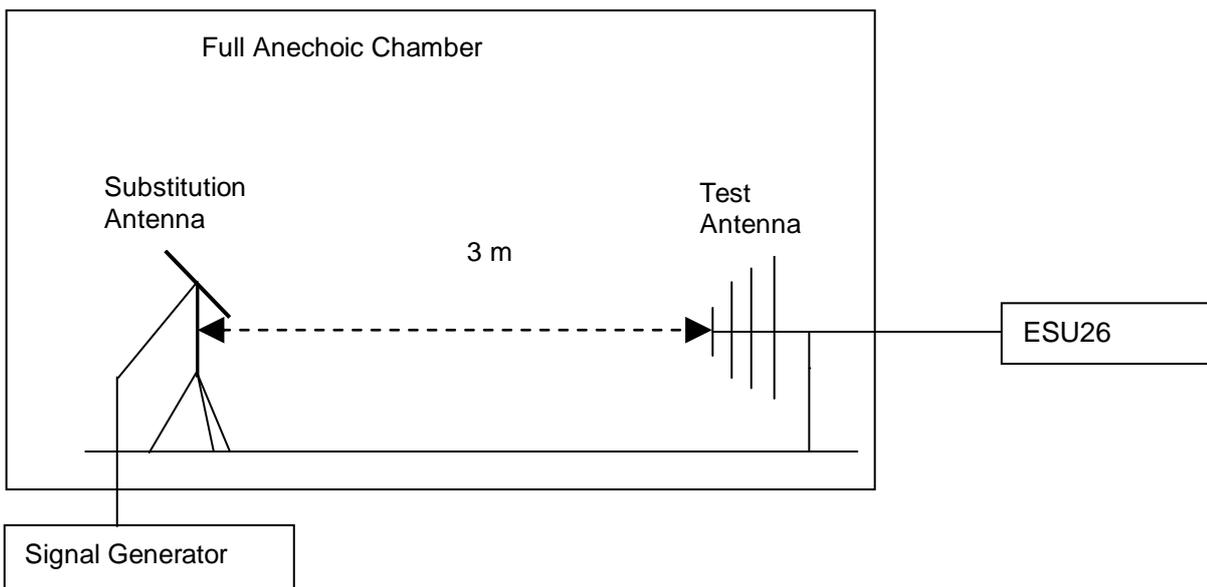


Figure 1. Test Set-up

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.
ERP was measured using 1 host.

BenQ Joy book S72



6.1.4 Measurement Results

6.1.4.1 Pre-test Results

		RF Output Power (ERP)					
TEST CONDITIONS		Channel 128(B)		Channel 192(M)		Channel 251(T)	
		824.2MHz		837.0MHz		848.8MHz	
		dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (3.8V)		Measured	Limit	Measured	Limit	Measured	Limit
TM1		34.65	38.5	34.78	38.5	34.58	38.5
TM2		29.39	38.5	29.45	38.5	29.35	38.5
TEST CONDITIONS		Channel 4132(B)		Channel 4182(M)		Channel 4233(T)	
		826.4MHz		836.4MHz		846.6MHz	
		dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (3.8V)		Measured	Limit	Measured	Limit	Measured	Limit
TM3		24.88	38.5	24.99	38.5	24.95	38.5

6.1.4.2 Substitution Results

Table 16 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	Limit [dBm]	Result
TM1	824.2	34.65	Dipole Ant.	38.03	-2.75	0.6	34.68	38.5	Pass
TM1	837.0	34.78	Dipole Ant.	38.23	-2.87	0.6	34.76	38.5	Pass
TM1	848.8	34.58	Dipole Ant.	38.07	-2.85	0.6	34.62	38.5	Pass
TM2	824.2	29.39	Dipole Ant.	32.77	-2.75	0.6	29.42	38.5	Pass
TM2	837.0	29.45	Dipole Ant.	32.92	-2.87	0.6	29.45	38.5	Pass
TM2	848.8	29.35	Dipole Ant.	32.83	-2.85	0.6	29.38	38.5	Pass
TM3	826.4	24.88	Dipole Ant.	28.27	-2.75	0.6	24.92	38.5	Pass
TM3	836.4	24.99	Dipole Ant.	28.45	-2.87	0.6	24.98	38.5	Pass
TM3	846.6	24.95	Dipole Ant.	28.38	-2.85	0.6	24.93	38.5	Pass

Note: a, For get the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,



$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

NOTE: SGP- Signal Generator Level

b, Measurement the ERP with RMS detector.

c, RBW=10kHz, VBW=300kHz, and integrated by the instrument to 250kHz for TM1 and TM2 and 5M for TM3.

6.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.2 Conducted Power of Transmitter

6.2.1 Test Conditions

Table 17 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3/TM4 at frequency B, M, T

6.2.2 Test Specifications and Limits

6.2.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 22 subpart H

6.2.2.2 Supporting Standards

Table 18 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.2.2.3 Limits

Compliance with part 22.913, in no any case may the peak power of a mobile station transmitter exceed 7 W. The calculated longitude ERP by following formula:

$$ERP(\text{dBm}) = 10 \cdot \log(ERP_{\text{in mwatts}}).$$

And for conducted power, we can use Antenna Gain to calculate the limit. So the conducted power:

$$P_{\text{cod}}(\text{dBm}) = ERP(\text{dBm}) - \text{Gain}(\text{dBd}).$$

and $\text{Gain}(\text{dBd}) = \text{Gain}(\text{dBi}) - 2.15\text{dB}$

Table 19 Limits

Maximum Output Power (Watts)	< 7 Watts(38.5dBm)
Antenna Gain(dBi):	4.28
Antenna Gain(dBd):	2.13
Maximum Conducted Output Power (dBm)	< 36.37

For HSDPA test mode, there are 4 sub-tests for different configuration.

Table 20 HSDPA conducted max power pre-scan

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	HS	CM (dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0	0
2	12/15	15/15	64	12/15	24/15	1	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

6.2.3 Test Method and Setup

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, Conducted maximum power shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the wireless communication tester CMU200 via the antenna connector. The band class is set as GSM850M.

(b) Test the Conducted maximum output power by the CMU200.

Test setup

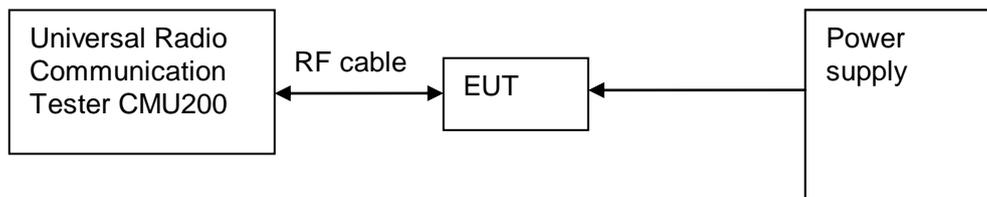


Figure 2. Test Set-up

6.2.4 Measurement Results

Table 21 Measurement Results

TEST CONDITIONS	RF Output Power (Conducted)					
	Channel 128(B)		Channel 192(M)		Channel 251(T)	
	824.2MHz		837.0MHz		848.8MHz	
	dBm		dBm		dBm	
T_{nom} (25 °C)/ V_{nom} (3.8V)	Measured	Limit	Measured	Limit	Measured	Limit
TM1	32.52	36.37	32.65	36.37	32.45	36.37
TM2	27.26	36.37	27.32	36.37	27.22	36.37
TEST CONDITIONS	Channel 4132(B)		Channel 4182(M)		Channel 4233(T)	



		826.4MHz		836.4MHz		846.6MHz	
		dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (3.8V)		Measured	Limit	Measured	Limit	Measured	Limit
TM3		22.75	36.37	22.86	36.37	22.82	36.37
TM4	Case1	22.18	36.37	22.24	36.37	22.31	36.37
	Case2	22.05	36.37	22.14	36.37	22.12	36.37
	Case3	21.47	36.37	21.58	36.37	21.53	36.37
	Case4	20.35	36.37	20.54	36.37	20.49	36.37

Note: Measurement the Conducted output power with RMS detector.

6.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.3 Modulation Characteristics

6.3.1 Test Conditions

Table 22 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency M

6.3.2 Test Specifications and Limits

6.3.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 22 subpart H

6.3.2.2 Supporting Standards

Table 23 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.3.2.3 Limits

No specific modulation characteristics requirement limits in part 2.1047 and part 22 subpart H.

Table 24 Limits

Limits	Not applicable
--------	----------------

6.3.3 Test Method and Setup

Connect the EUT to Wireless Communication Test Set R&S CMU200 via the antenna connector. The band class is set as GSM850M; the EUT's output is matched with 50 Ω loads, test method was according to 3GPP TS 51.010. The waveform quality and constellation of the EUT was tested.

Test setup

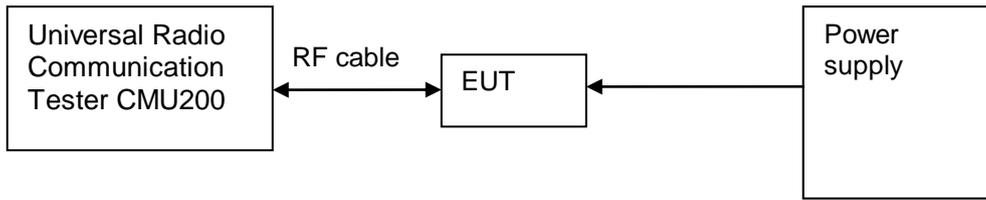


Figure 3. Test Set-up

6.3.4 Measurement Results

Table 25 Measurement Results

TEST CONDITIONS		Modulation Characteristic	
		Channel 192(M)	
		Measured	
		TM1	TM2
T _{nom} (25 °C)	V _{nom} (3.8V)	Refer to Appendix A	Refer to Appendix A
TEST CONDITIONS		Modulation Characteristic	
		Channel 4182(M) 836.4MHz	
		Measured	
		TM3	
T _{nom} (25 °C)	V _{nom} (3.8V)	Refer to Appendix A	

6.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix A.

6.4 Occupied Bandwidth

6.4.1 Test Conditions

Table 26 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency B, M, T

6.4.2 Test Specifications and Limits

6.4.2.1 Specification

CFR 47 (FCC) part 2.1049 and part 22 subpart H.

6.4.2.2 Supporting Standards

Table 27 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.4.2.3 Limits

No specific occupied bandwidth requirement in part 22 subpart H, but the occupied bandwidth was defined in part 2.1049: the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Table 28 Limits

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

6.4.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector. The band class is set as GSM850M; The EUT was controlled to transmit maximum power. Measure and record the occupied bandwidth of the EUT by the R&S FSQ31.

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

Refer to 47CFR part2.1049 section (g) & (h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

For TM1/TM2 following RBW and VBW are employed:

Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)

Video bandwidth (VBW): 10 kHz

For TM3 following RBW and VBW are employed:

Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)

Video bandwidth (VBW): 500 kHz

Test Set-up

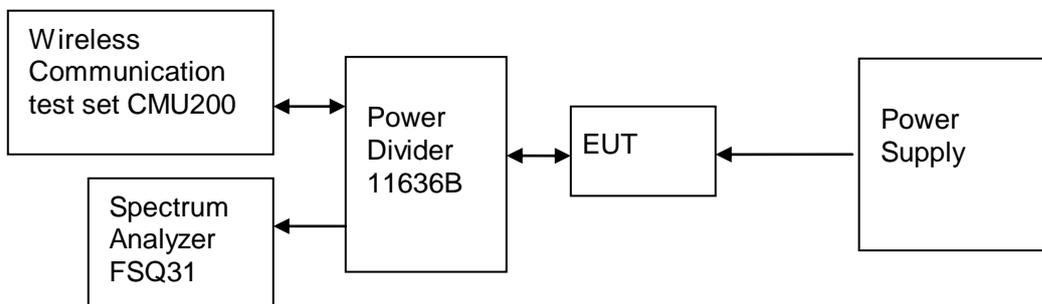


Figure 4. Test Set-up

6.4.4 Measurement Results

Table 29 Measurement Results

TEST CONDITIONS		Occupied Bandwidth					
		Channel 128(B)		Channel 192(M)		Channel 251(T)	
Center Frequency		824.2MHz		837.0MHz		848.8MHz	
		Measured		Measured		Measured	
		(kHz)		(kHz)		(kHz)	
		TM1	TM2	TM1	TM2	TM1	TM2
T _{nom} (25 °C)/ V _{nom} (3.8V)	99%	248.40	241.99	246.79	248.40	243.59	245.19



		Channel 4132(B)	Channel 4182(M)	Channel 4233(T)
Center Frequency		826.4MHz	836.4MHz	846.6MHz
		Measured	Measured	Measured
		(MHz)	(MHz)	(MHz)
		TM3	TM3	TM3
T_{nom} (25 °C)/ V_{nom} (3.8V)	99%	4.20	4.17	4.17

6.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix B.

6.5 Band Edges Compliance

6.5.1 Test Conditions

Table 30 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency B, T

6.5.2 Test Specifications and Limits

6.5.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 22.917

6.5.2.2 Supporting Standards

Table 31 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.5.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P(W)$. (Whereas P is the rated power of the EUT in Watt).

Table 32 Limits

	TM1	TM2	TM3
Rated Power:	33 dBm	27 dBm	24 dBm
Required attenuation:	$43 + 10 \log(2) = 46$, 33 dBm - 46 dB	$43 + 10 \log(0.5) = 40$, 27 dBm - 40 dB	$43 + 10 \log(0.25) = 37$, 24dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

6.5.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the band class is set as GSM850M. The EUT was controlled to transmit maximum power. Measure and

record band edges compliance of the EUT by the R&S FSQ31.

The limit is -13dBm.

For TM1/TM2 following RBW and VBW are employed:

Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)

Video bandwidth (VBW): 10 kHz

For TM3 following RBW and VBW are employed:

Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)

Video bandwidth (VBW): 200 kHz

Test Set-up

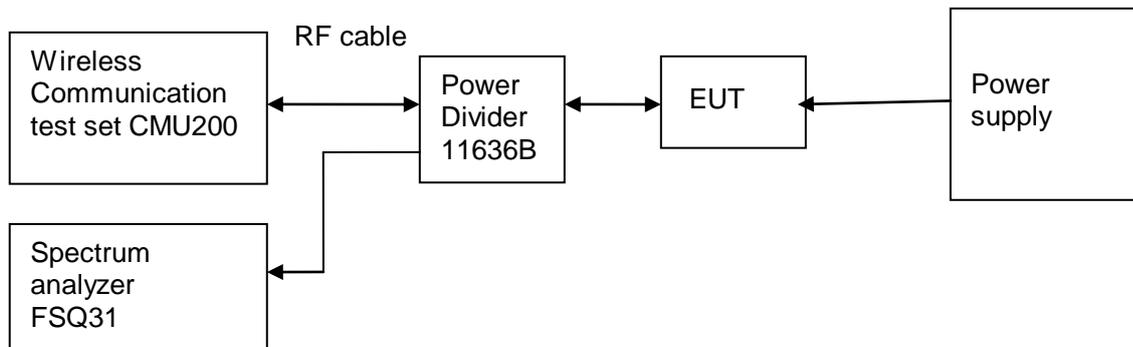


Figure 5. Test Set-up

6.5.4 Measurement Results

Table 33 Measurement Results outside Band Edges

Band	Frequency of Band edges [MHz]	Channel Number	Test Mode	Spurious Level measured [dBm]	FCC limit	Result
T_{nom} (25 °C), V_{nom} (3.8V)						
Cellular	824.2	128	TM1	<-13(See appendix C)	- 13 dBm	Pass
	848.8	251	TM1	<-13(See appendix C)	- 13 dBm	Pass
	824.2	128	TM2	<-13(See appendix C)	- 13 dBm	Pass
	848.8	251	TM2	<-13(See appendix C)	- 13 dBm	Pass
	826.4	4132	TM3	<-13(See appendix C)	- 13 dBm	Pass
	846.6	4233	TM3	<-13(See appendix C)	- 13 dBm	Pass

6.5.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix C.

6.6 Spurious Emission at Antenna Terminal

6.6.1 Test Conditions

Table 34 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency B, M, T

6.6.2 Test Specifications and Limits

6.6.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 22.917

6.6.2.2 Supporting Standards

Table 35 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.6.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT in Watt).

Table 36 Limits

	TM1	TM2	TM3
Rated Power:	33 dBm	27 dBm	24 dBm
Required attenuation:	$43 + 10 \log(2) = 46$, 33 dBm - 46 dB	$43 + 10 \log(0.5) = 40$, 27 dBm - 40 dB	$43 + 10 \log(0.25) = 37$, 24dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

6.6.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the band class is set as GSM850M. The EUT was controlled to transmit maximum power. Measure and

record the Conducted Spurious Emission of the EUT by the R&S FSQ31.

According to part 22.917, the defined measurement bandwidth as following:

22.917 (b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
 Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;
 Measurement bandwidth (RBW) for 30 MHz up to 1 GHz: 100 kHz;
 Measurement bandwidth (RBW) for 1 GHz up to 12.75 GHz: 1 MHz;

Test Set-up

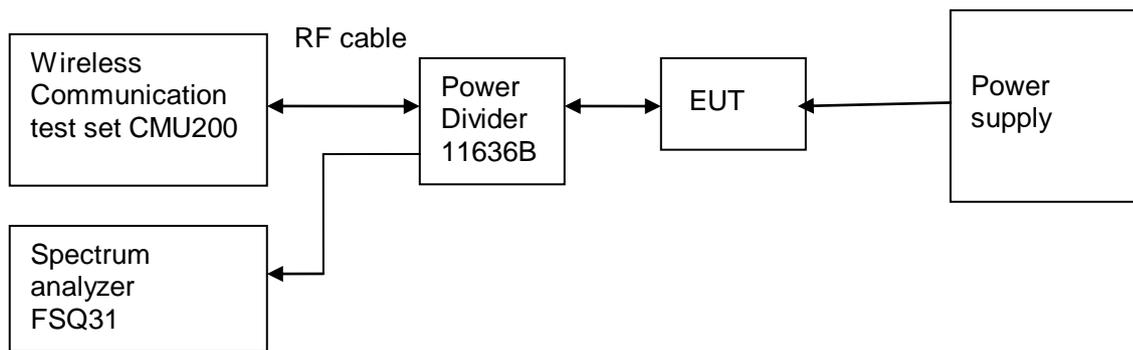


Figure 6. Test Set-up

6.6.4 Measurement Results

Table 37 Measurement Results

Channel Number	Test Mode	Test Range (Frequency)	Output Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel 128(B)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 4132(B)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 192(M)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D)	- 13 dBm	Pass



Channel 4182(M)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 251(T)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 4233(T)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass

6.6.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix D.

6.7 Radiated Spurious Emissions

6.7.1 Test Conditions

Table 38 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1/TM2/TM3/TM4 at frequency M

6.7.2 Test Specifications and Limits

6.7.2.1 Specification

CFR 47 (FCC) part 2.1053 and part 22.917

6.7.2.2 Supporting Standards

Table 39 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.7.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Table 40 Limits

Absolute level	- 13 dBm
----------------	----------

6.7.3 Test Method and Setup

A test site fulfilling the requirements of ITU-R Recommendation SM329-11 was used. The EUT was placed on a non-conducting support in the anechoic chamber and was operated from a power source via an RF filter to avoid radiation from the power leads.

According to part 22.917, the defined measurement bandwidth as following:

22.917 (b) Measurement procedure: Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;


Measurement bandwidth (RBW) for 30MHz up to 1GHz: 100k Hz;
Measurement bandwidth (RBW) for 1GHz up to 18GHz: 1MHz;

Test Set-up

Step 1:


For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the BTS simulator via the air interface.

Test the Radiated maximum output power by the Test Receiver from test antenna.

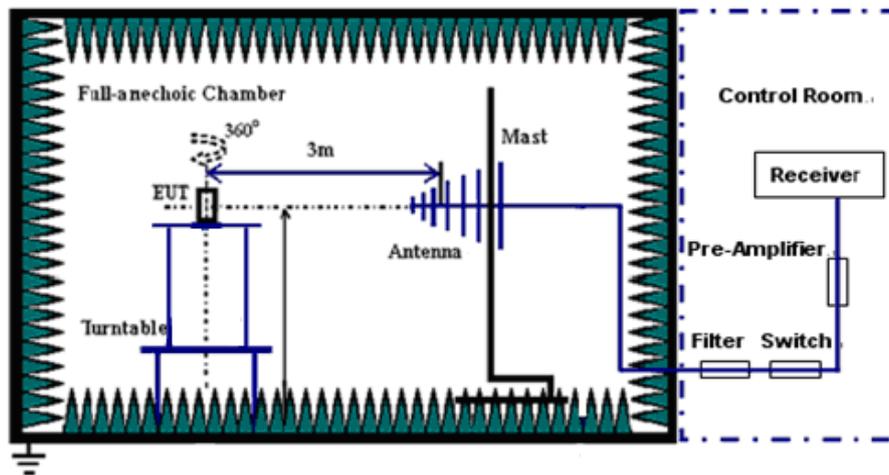

Step 2:

Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step1 on Test Receiver, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

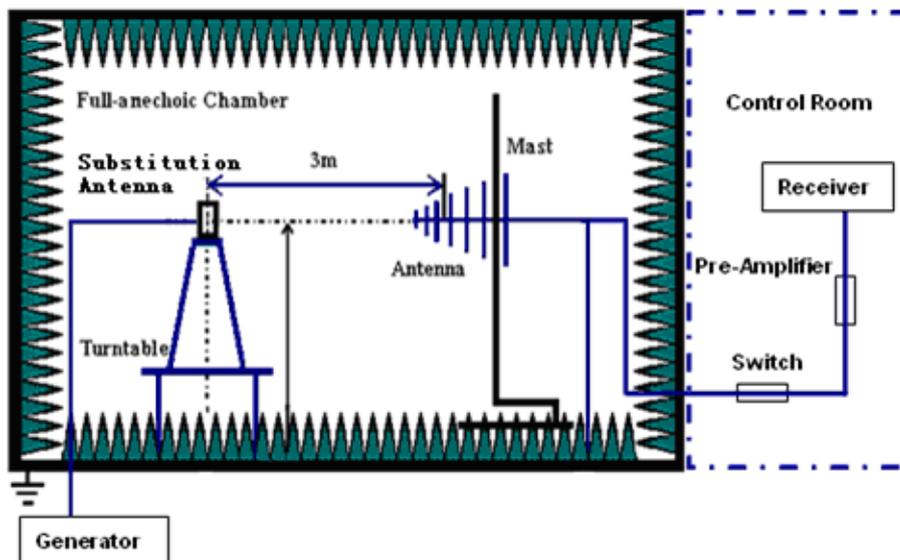

Test should be performed in normal voltage condition.



No peak found in pre- test. All frequency points' margin is bigger than 20dB, so the substitution method isn't used.

Calculation Sample:

Table 41 Substitution Results

Freq. [MHz]	Measurement Value [dBm]	Substitution Antenna Type	Gain [dBd]	Cable Loss [dB]	Signal Generator Level [dBm]	Substitution Level [dBm]	FCC limit [dBm]	Result

Note: For get the E.R.P. (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{E.R.P. [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

NOTE: SGP- Signal Generator Level

6.7.4 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix_E

6.8 Frequency Stability

6.8.1 Test Conditions

Table 42 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	See below
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency M

6.8.2 Test Specifications and Limits

6.8.2.1 Specification

CFR 47 (FCC) part 2.1055 and part 22.355

6.8.2.2 Supporting Standards

Table 43 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0	Digital cellular telecommunications system; Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.8.2.3 Limits

According to part 22.355, from 821MHz to 896MHz, for mobile device, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances 2.5ppm.

6.8.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30 ° to +50 ° centigrade for all equipment except that specified in subparagraphs (2) and (3) of paragraph 2.1055

(a) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(b) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating

end point, which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

(c) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

The EUT can only work in such extreme temperature -20 to +70 °C, so here the EUT is tested -20°C in the lowest temperature.

Test Set up

Connect the EUT to the Wireless Communication test set CMU200 via the connector. Then measure the frequency error by the Wireless Communication test set CMU200. The EUT's output is matched with a 50 Ω load.

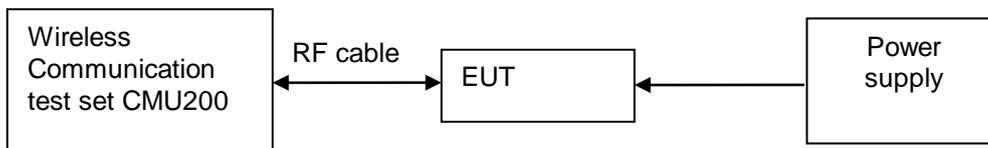


Figure 7. Test Set-up

6.8.4 Measurement Results

6.8.4.1 Measurement Results vs. Variation of Temperature

- **TM1,3.8V DC Channel No.192(837.0MHz)**

Table 44 Measurement Results vs. Variation of Temperature—TM1

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-20 °C	837.0	-12	Pass
-10 °C	837.0	15	Pass
0 °C	837.0	12	Pass
+10 °C	837.0	-10	Pass
+20 °C	837.0	-11	Pass
+30 °C	837.0	8	Pass
+40 °C	837.0	-7	Pass
+50 °C	837.0	-16	Pass



● **TM2,3.8V DC Channel No.192(837.0MHz)**

Table 45 Measurement Results vs. Variation of Temperature—TM2

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-20 °C	837.0	-8	Pass
-10 °C	837.0	15	Pass
0 °C	837.0	-12	Pass
+10 °C	837.0	15	Pass
+20 °C	837.0	-17	Pass
+30 °C	837.0	-14	Pass
+40 °C	837.0	11	Pass
+50 °C	837.0	8	Pass

● **TM3,3.8V DC Channel No.4182(836.4MHz)**

Table 46 Measurement Results vs. Variation of Temperature—TM3

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-20 °C	836.4	8	Pass
-10 °C	836.4	14	Pass
0 °C	836.4	-12	Pass
+10 °C	836.4	-11	Pass
+20 °C	836.4	16	Pass
+30 °C	836.4	-10	Pass
+40 °C	836.4	-11	Pass
+50 °C	836.4	-17	Pass



6.8.4.2 Measurement Results vs. Variation of Voltage

- **TM1, 25 °C ,Channel No. 192(837.0MHz)**

Table 47 Measurement Results vs. Variation of Voltage – TM1

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+4.2V	837.0	-21	Pass
+3.8V	837.0	-26	Pass
+3.3V	837.0	-23	Pass

- **TM2, 25 °C ,Channel No. 192(837.0MHz)**

Table 48 Measurement Results vs. Variation of Voltage – TM2

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+4.2V	837.0	-32	Pass
+3.8V	837.0	-35	Pass
+3.3V	837.0	-28	Pass

- **TM3, 25 °C ,Channel No. 4182(836.4MHz)**

Table 49 Measurement Results vs. Variation of Voltage – TM3

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+4.2V	836.4	5	Pass
+3.8V	836.4	-12	Pass
+3.3V	836.4	-7	Pass

6.8.5 Conclusion

The equipment **PASSED** the requirement of this clause.



7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Table 50 System Measurement Uncertainty

Items		Extended Uncertainty
Effective Radiated Power of Transmitter	ERP (dBm)	U=3dB; k=2
Band Width	Magnitude (%)	U=0.2%; k=2
Band Edge Compliance	Disturbance Power(dBm)	U=2.0dB; k=2
Conducted Spurious Emission at Antenna Terminal	Disturbance Power(dBm)	U=2.0dB; k=2
Frequency Stability	Frequency Accuracy(ppm)	U=0.21ppm; k=2
Field Strength of Spurious Radiation	ERP(dBm)	U=2.2dB; k=2



8 Appendices

Appendix A	Measurement Results Modulation Characteristics
Appendix B	Measurement Results Occupied Bandwidth
Appendix C	Measurement Results Band Edges
Appendix D	Measurement Results Spurious Emission at Antenna Terminal
Appendix E	Measurement Results Radiated Spurious Emissions
Appendix F	Photos of Radiated Spurious Emissions

(END OF REPORT)




Appendix A

Modulation Characteristics

According to FCC Part 2.1047 & Part22 Subpart H




TM1:GPRS/GSM Channel 192

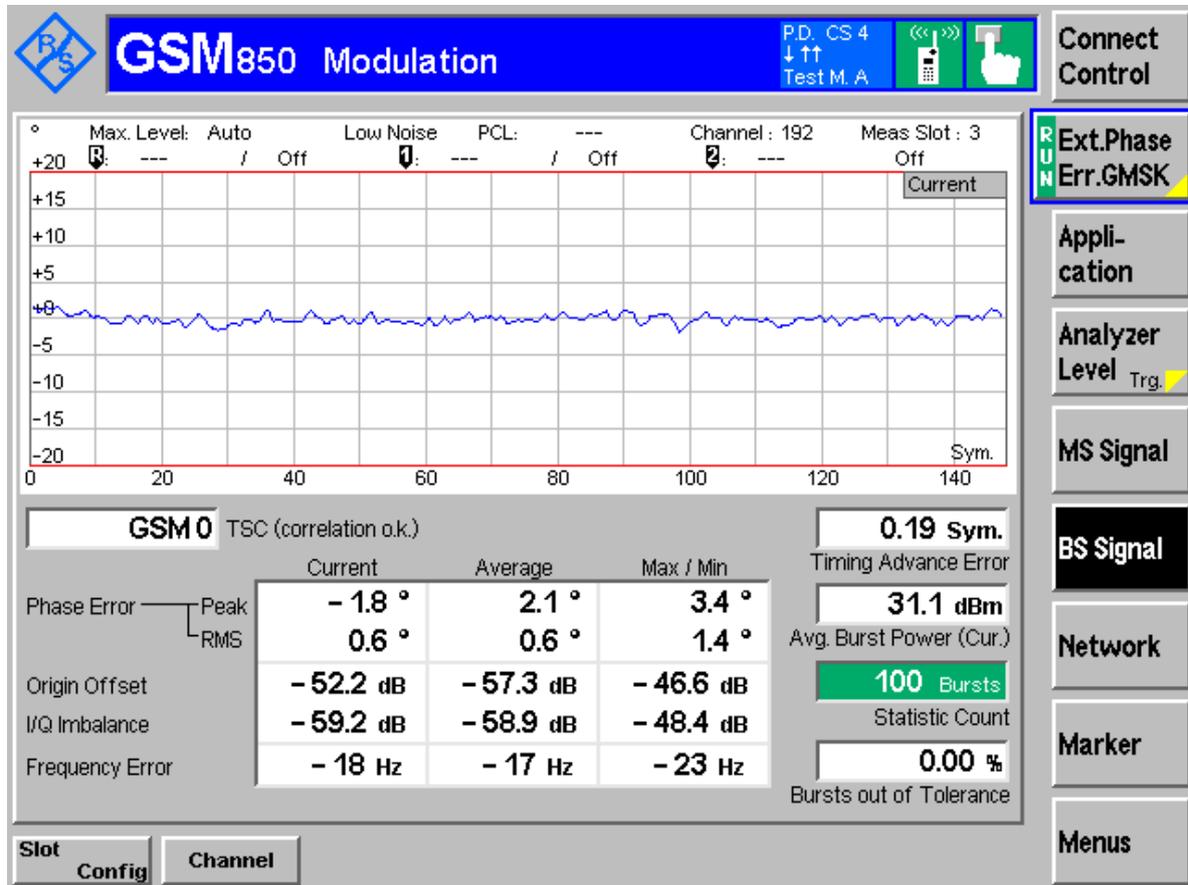




TM2:EDGE Channel 192

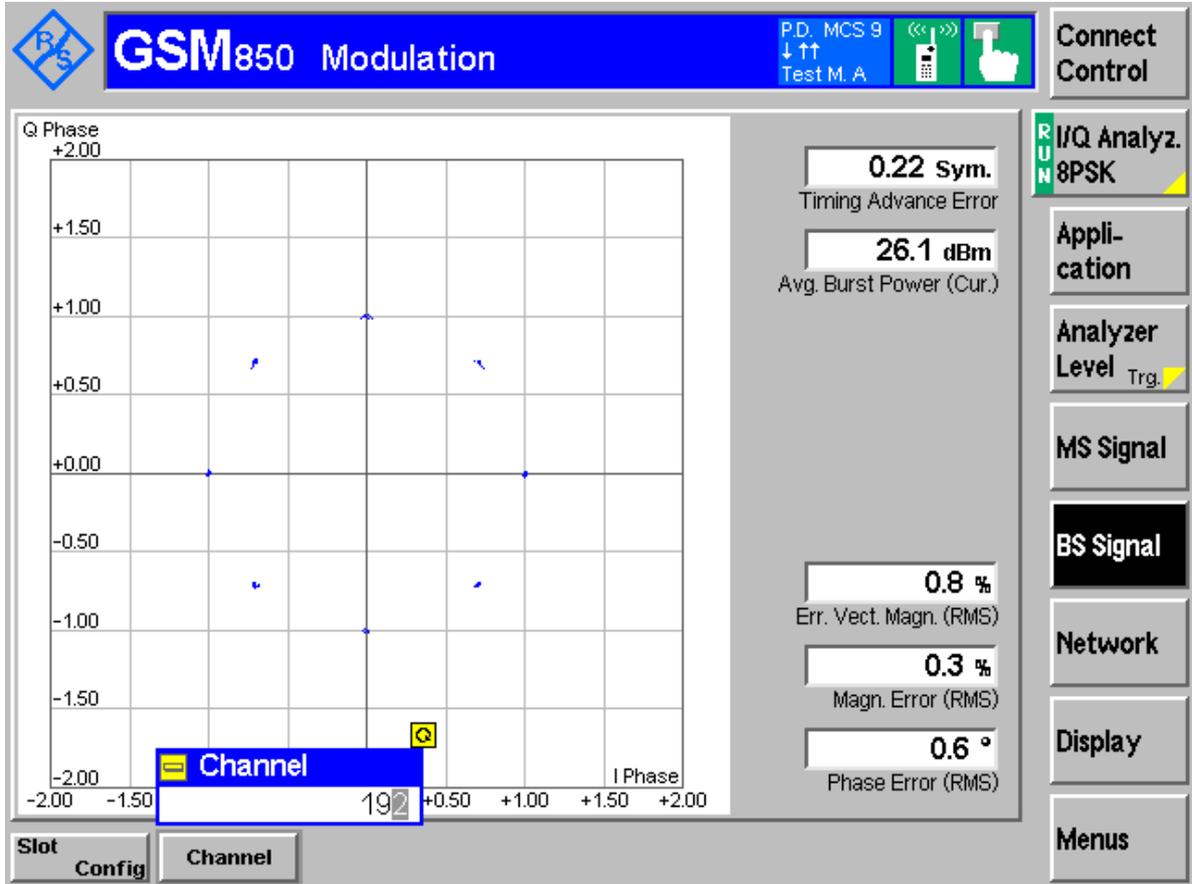



TM3: WCDMA Channel 4182

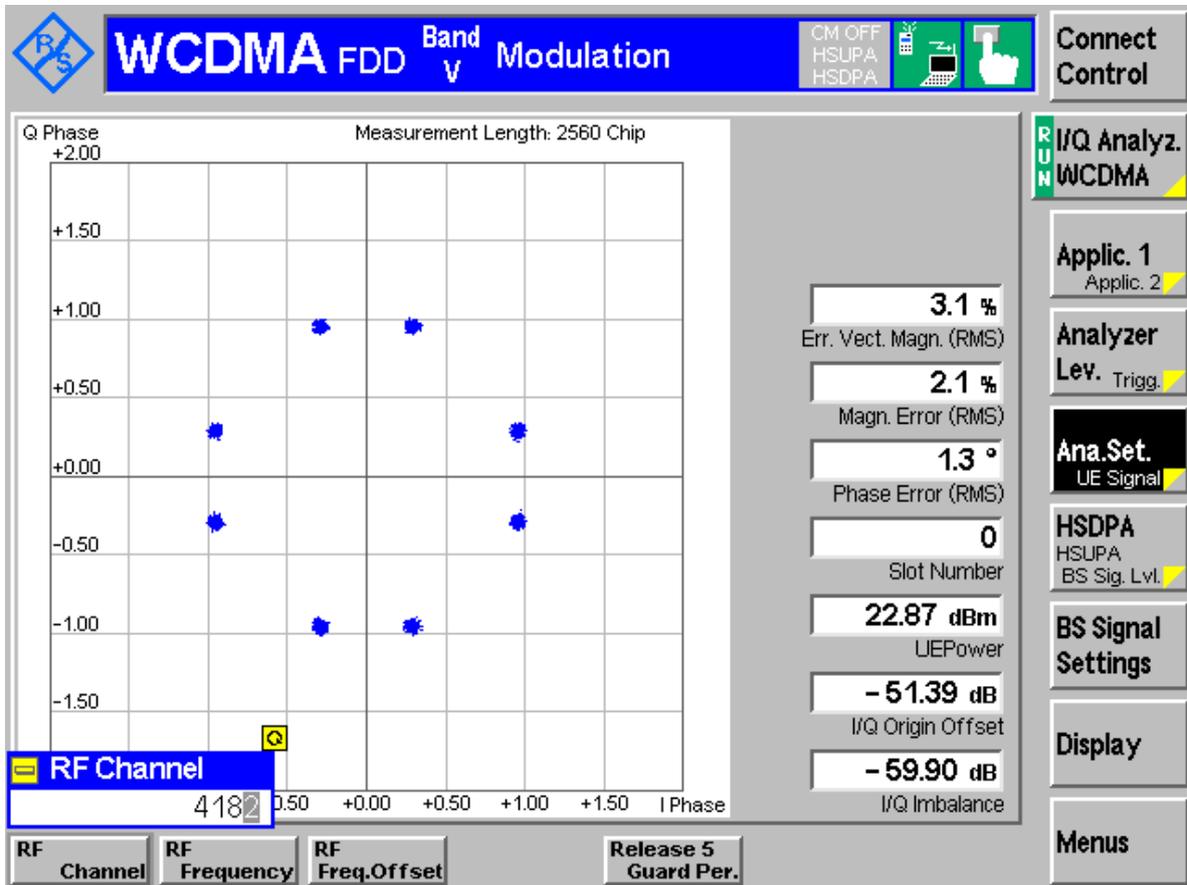




Appendix B

Occupied Bandwidth

According to FCC Part 2.1049 & Part 22 Subpart H




Channel 128(TM1:GPRS/GSM)

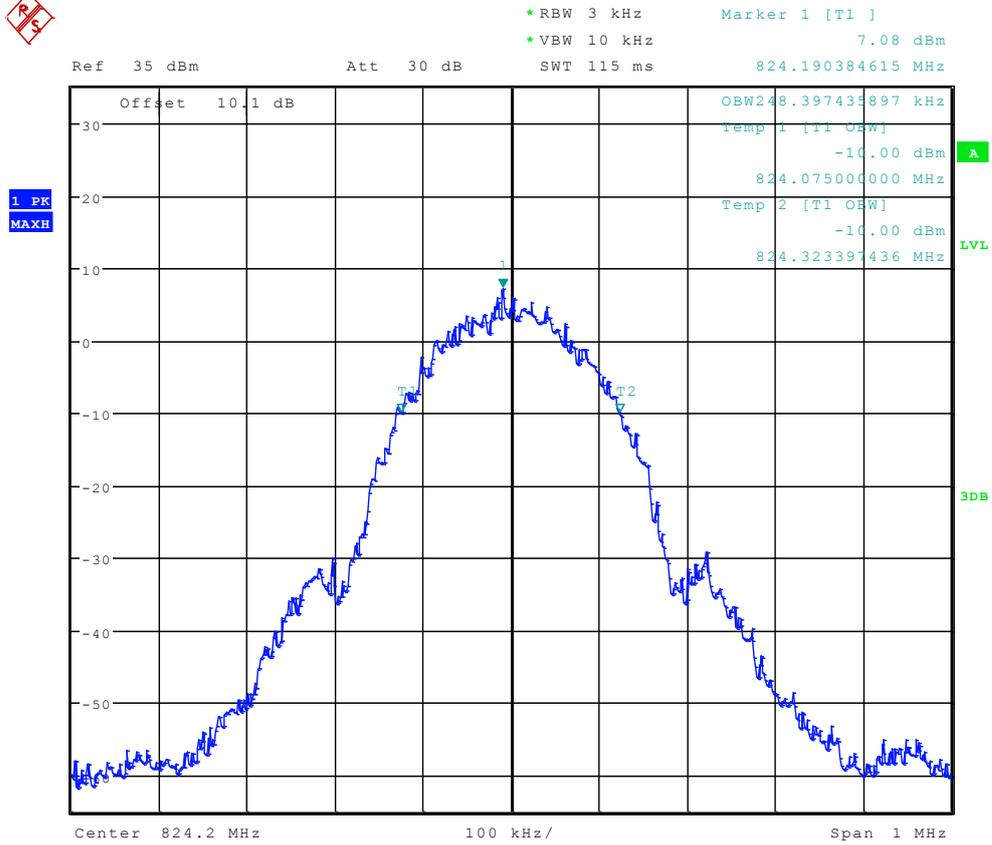

Date: 27.SEP.2011 23:34:25



Channel 128(TM2:EDGE)

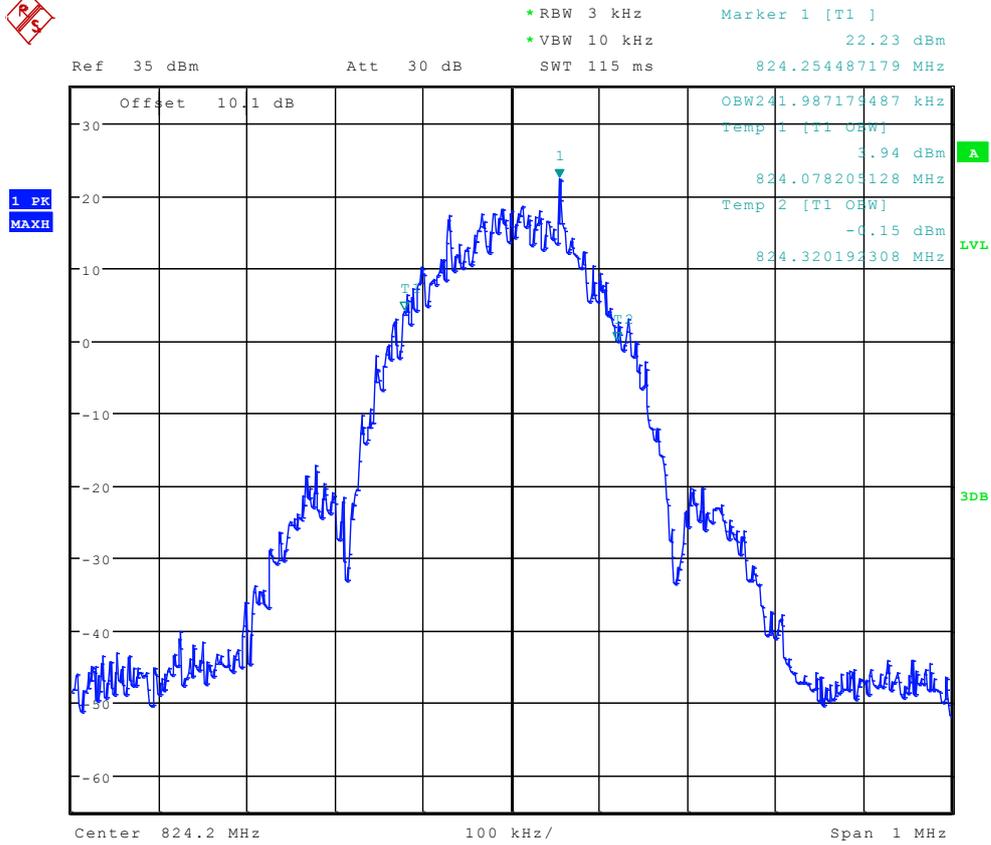


Date: 27.SEP.2011 23:43:09



Channel 4132(TM3: WCDMA)




*RBW 50 kHz Marker 1 [T1]
*VBW 500 kHz 14.49 dBm
SWT 5 ms 826.992948718 MHz

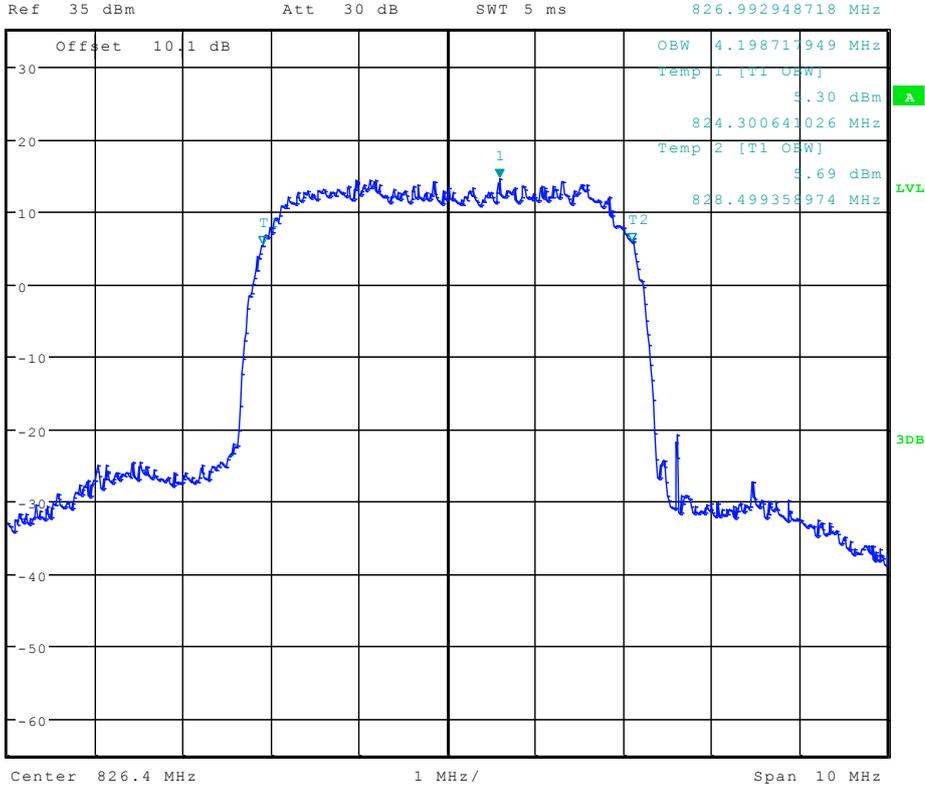

Date: 27.SEP.2011 23:47:35




Channel 192(TM1:GPRS/GSM)

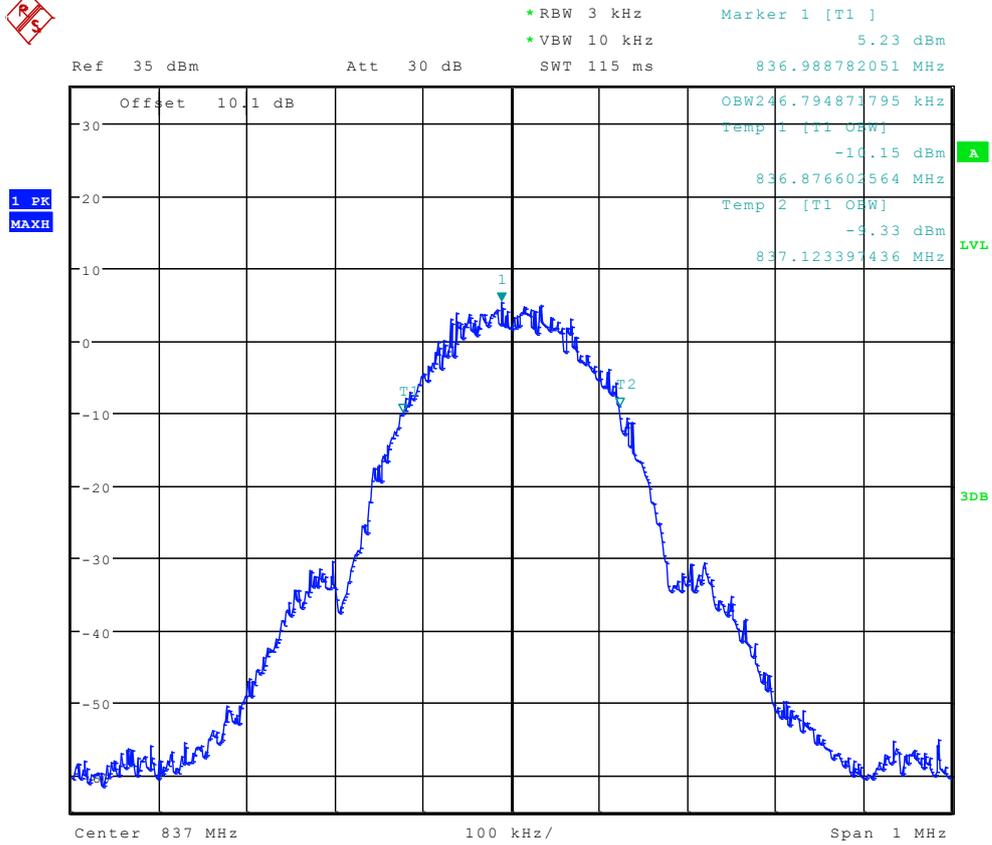

Date: 27.SEP.2011 23:34:39




Channel 192(TM2:EDGE)

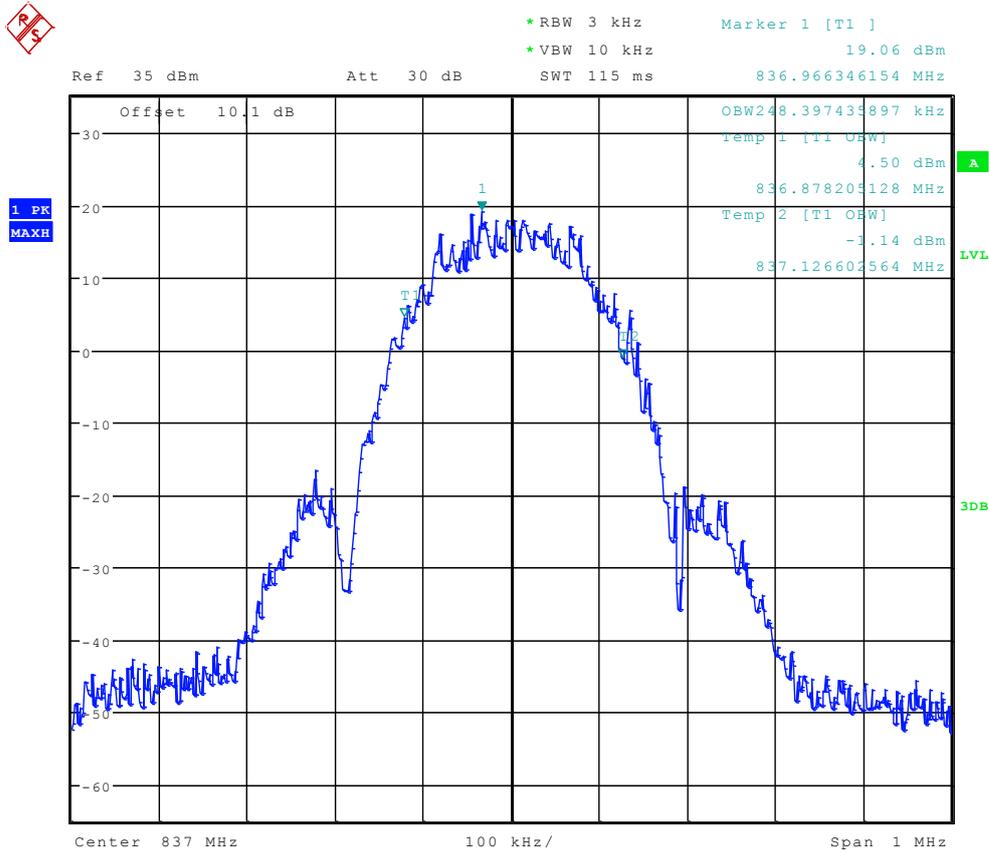

Date: 27.SEP.2011 23:43:23




Channel 4182(TM3: WCDMA)

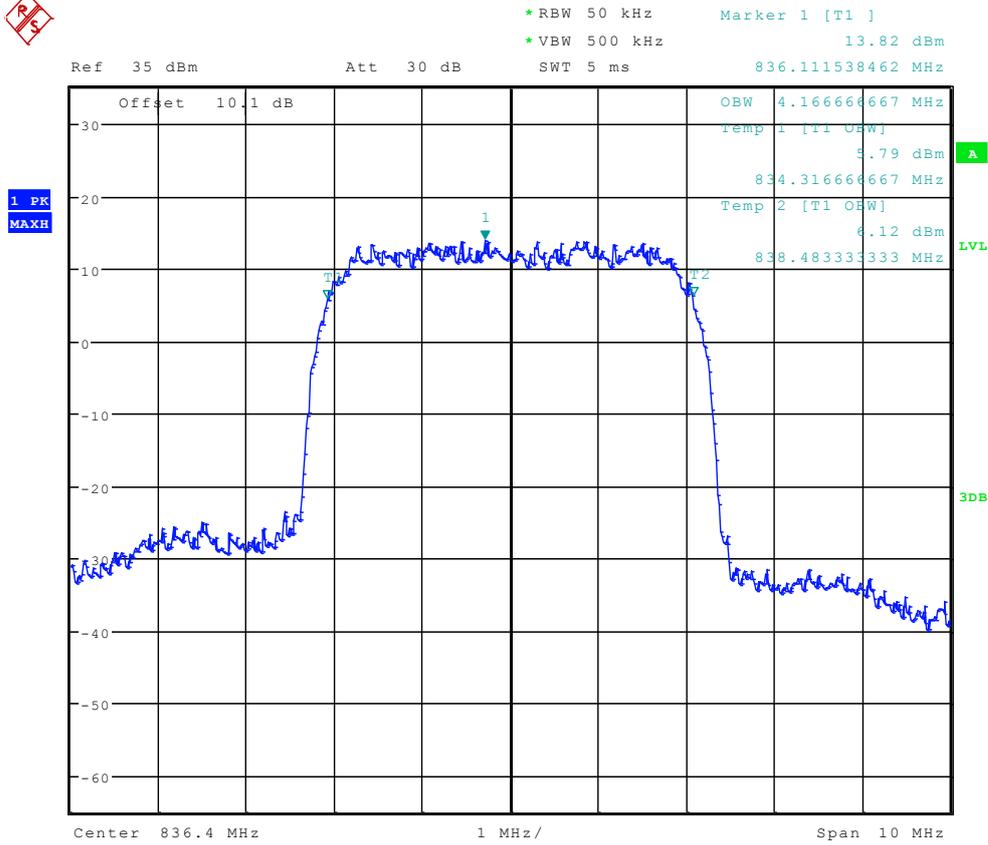

Date: 27.SEP.2011 23:47:49




Channel 251(TM1:GPRS/GSM)

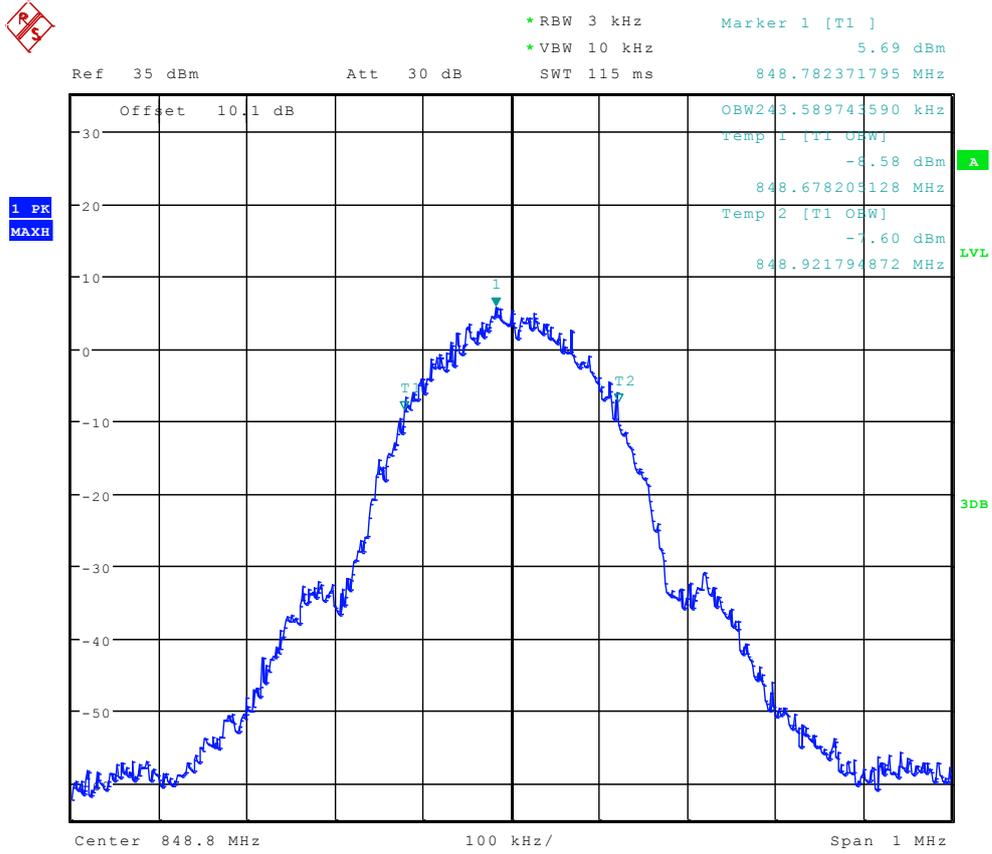

Date: 27.SEP.2011 23:34:52




Channel 251(TM2:EDGE)

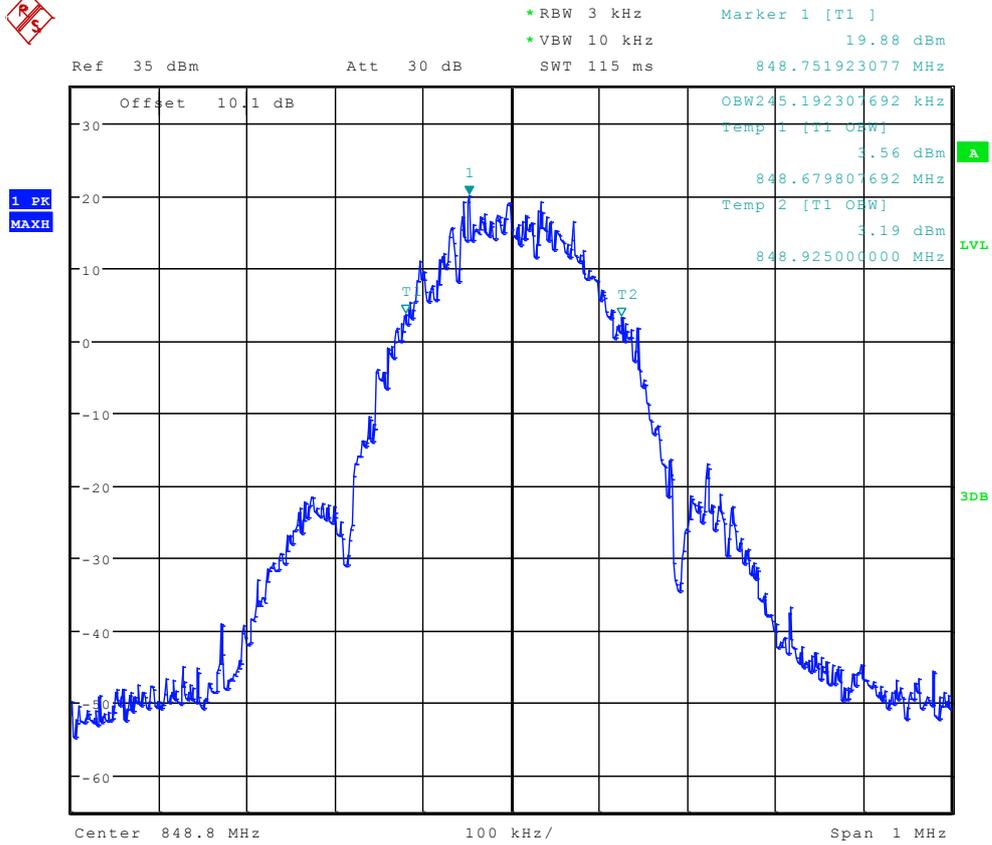

Date: 27.SEP.2011 23:43:36



Channel 4233(TM3: WCDMA)

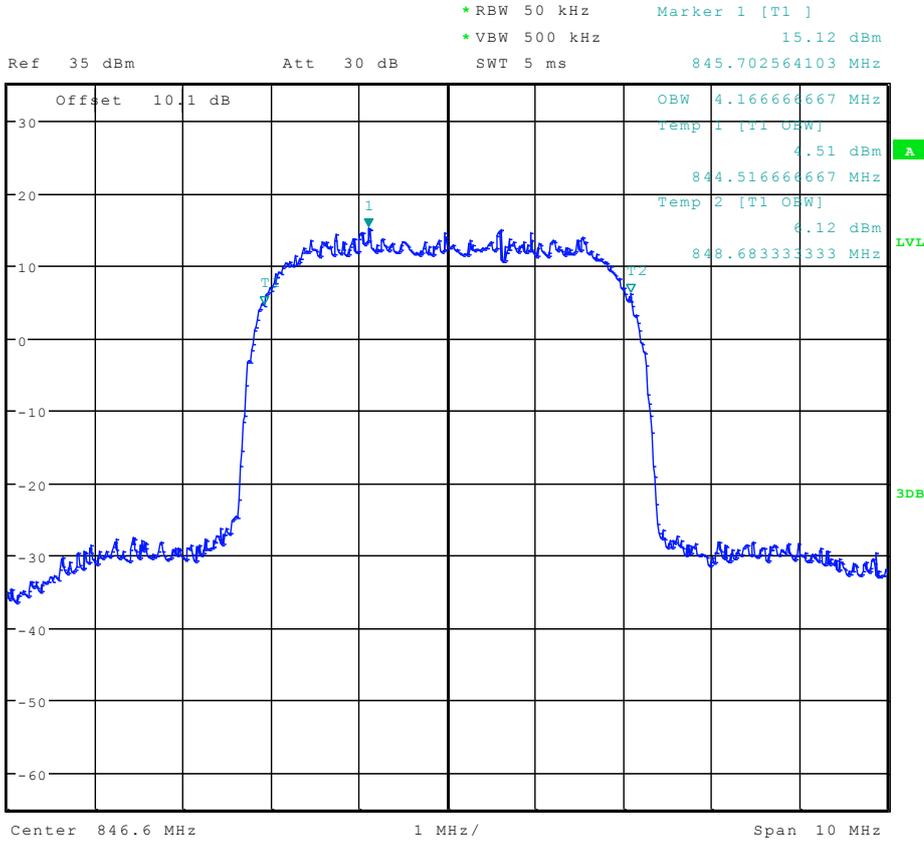

Date: 27.SEP.2011 23:48:02



Appendix C

Band Edges Compliance


According to FCC Part 2.1051 & Part 22 Subpart H



TM1:GPRS/GSM

Left Edge


Channel 128

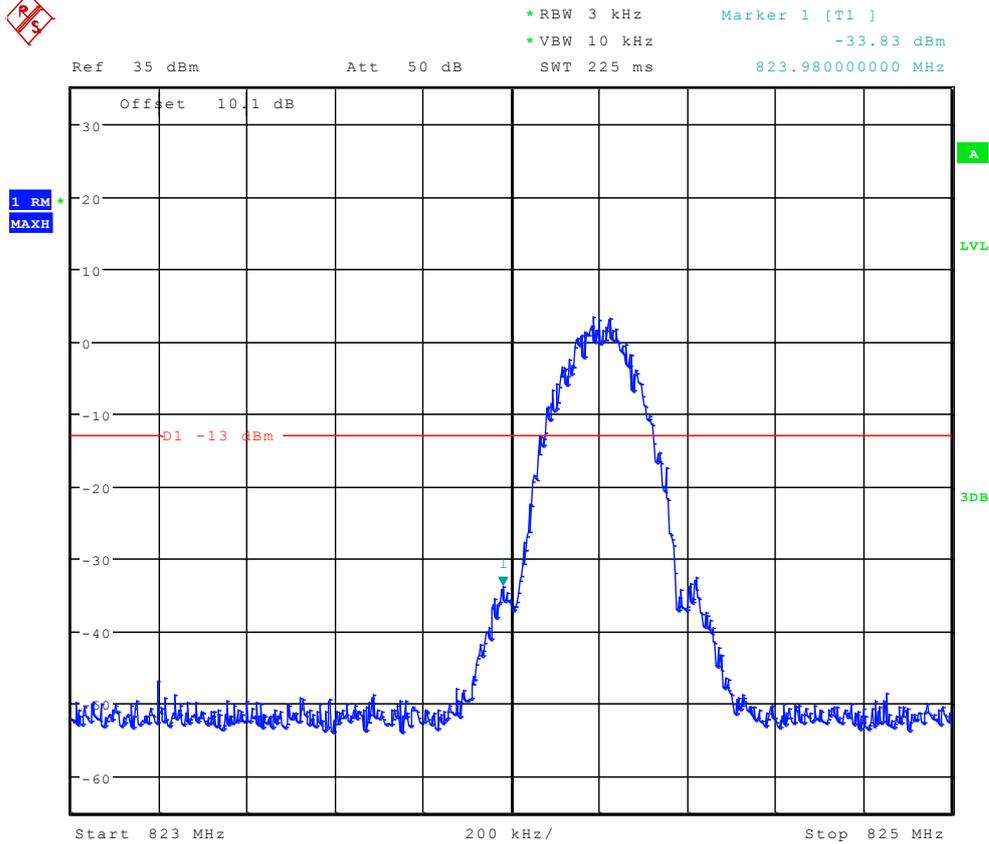

Date: 27.SEP.2011 23:53:23



Right Edge Channel 251

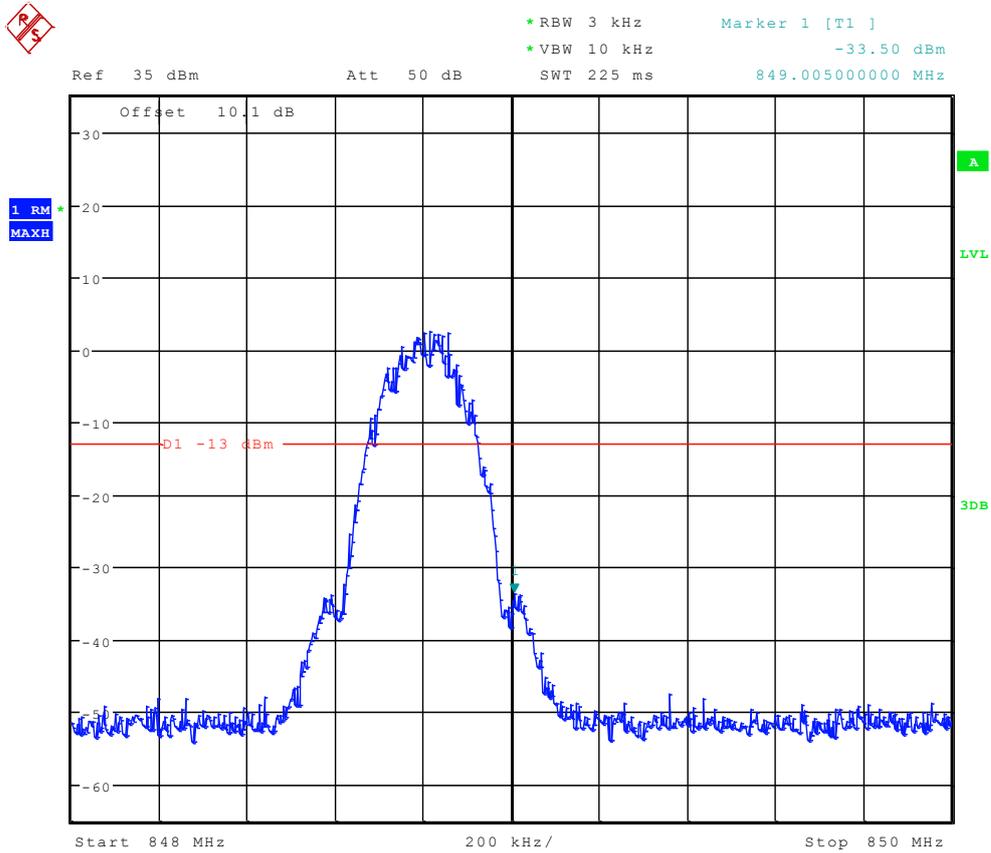

Date: 27.SEP.2011 23:53:36




TM2:EDGE

Left Edge

Channel 128




Ref 35 dBm Att 50 dB SWT 225 ms
*RBW 3 kHz *VBW 10 kHz
Marker 1 [T1] -20.76 dBm
823.965000000 MHz

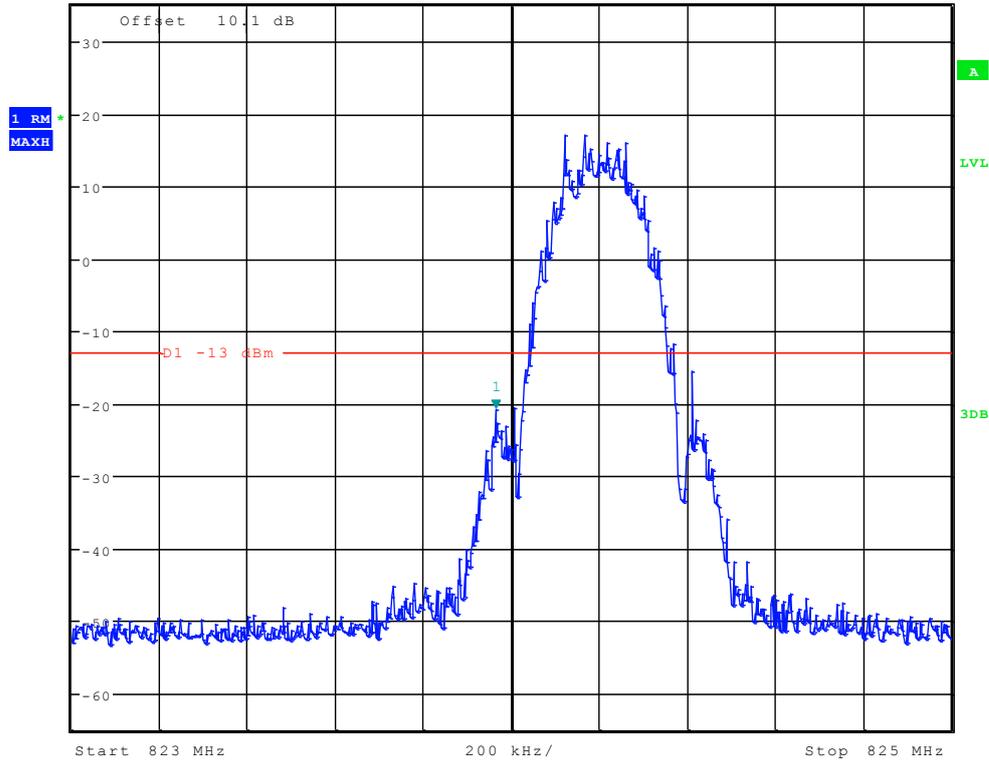

Date: 27.SEP.2011 23:42:41



Right Edge Channel 251

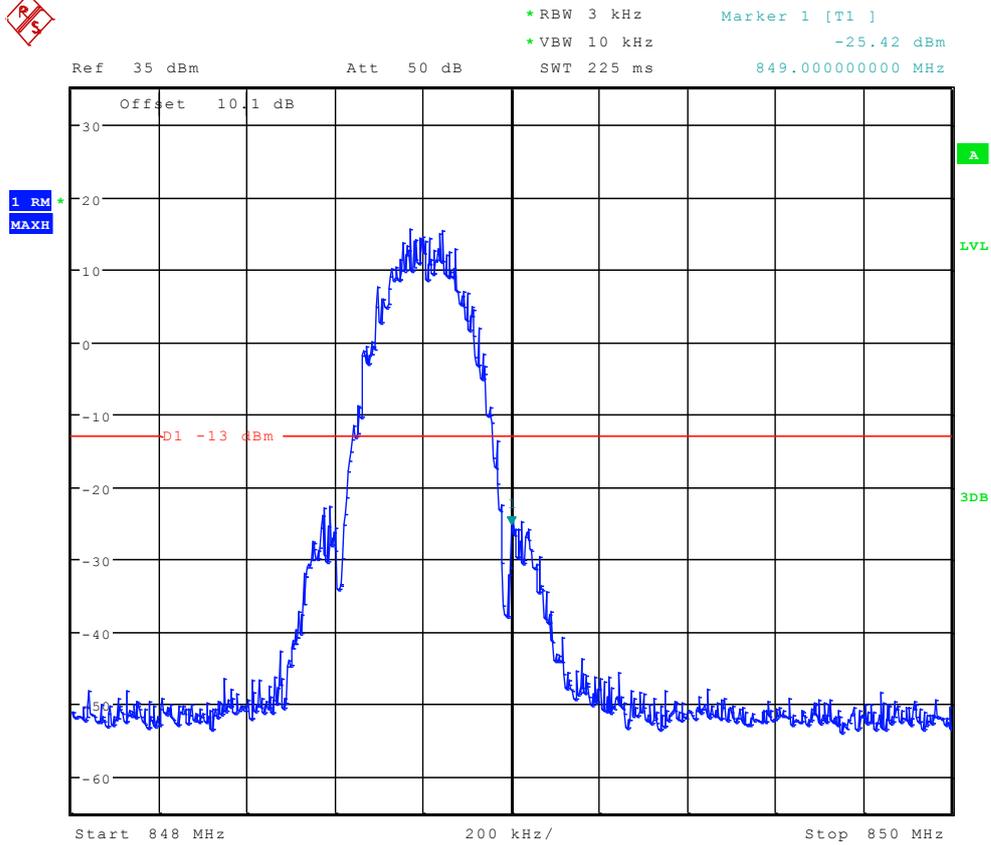


Date: 27.SEP.2011 23:42:54



TM3: WCDMA

Left Edge

Channel 4132

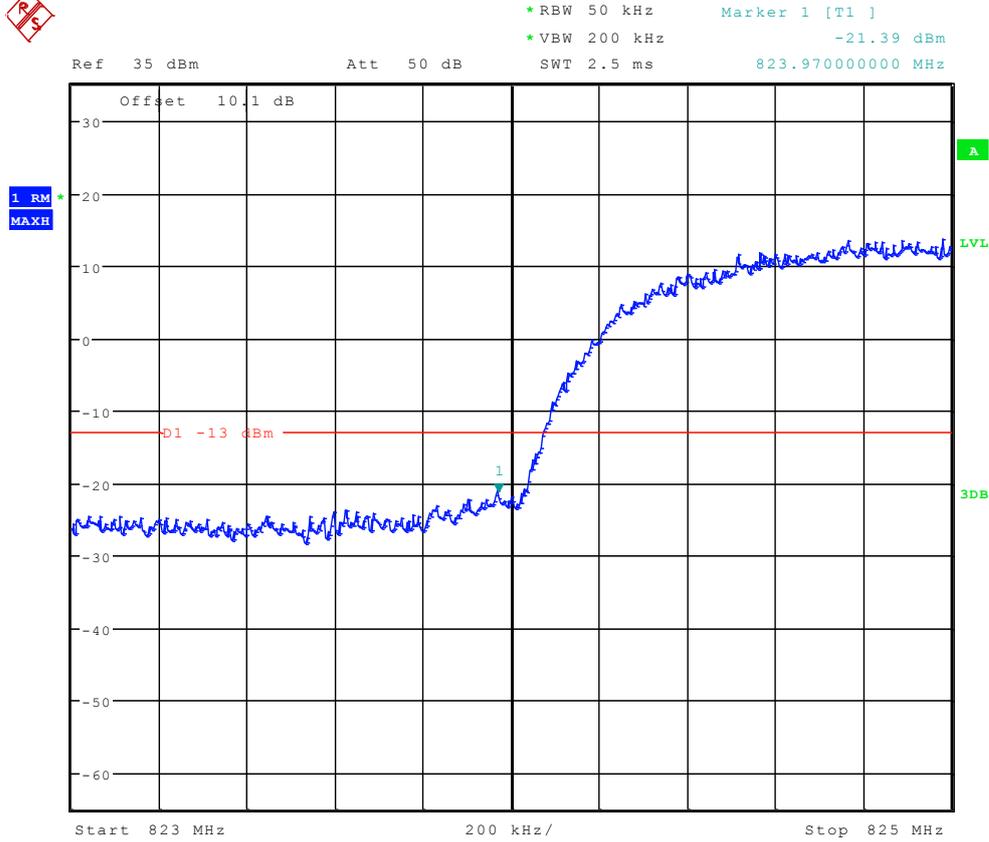


Date: 27.SEP.2011 23:48:17



Right Edge Channel 4233



*RBW 50 kHz Marker 1 [T1]
*VBW 200 kHz -25.04 dBm
SWT 2.5 ms 849.000000000 MHz

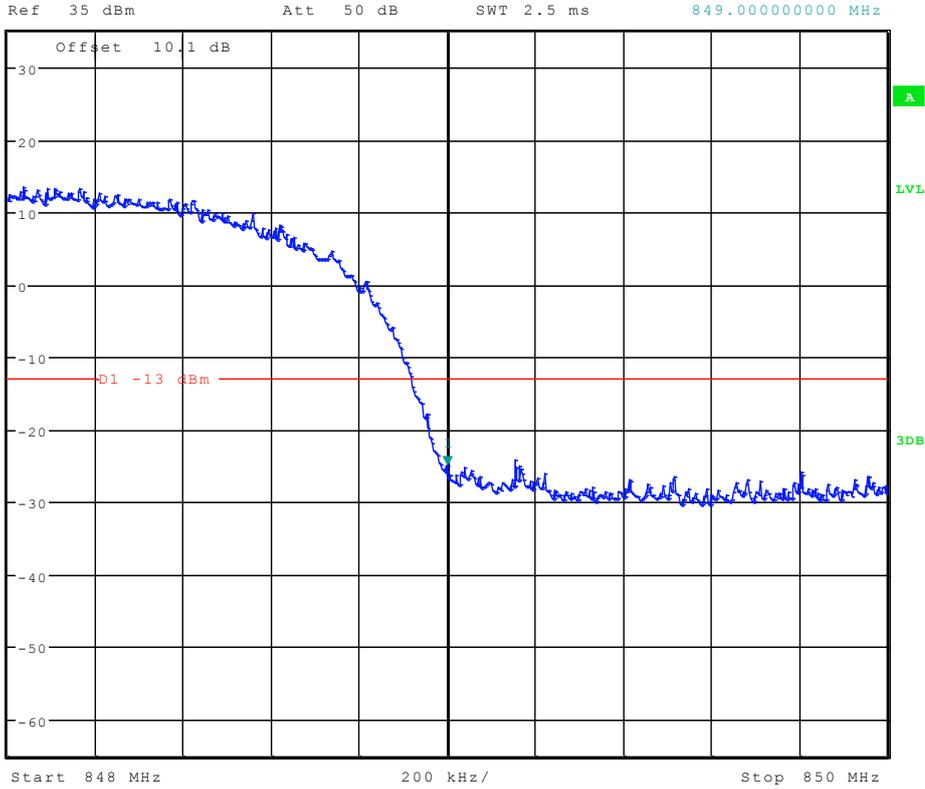

Date: 27.SEP.2011 23:48:31




Appendix D

Spurious Emission at Antenna Terminal

According to FCC Part 2.1051 & Part 22 Subpart H




TM1:GPRS/GSM Channel 128

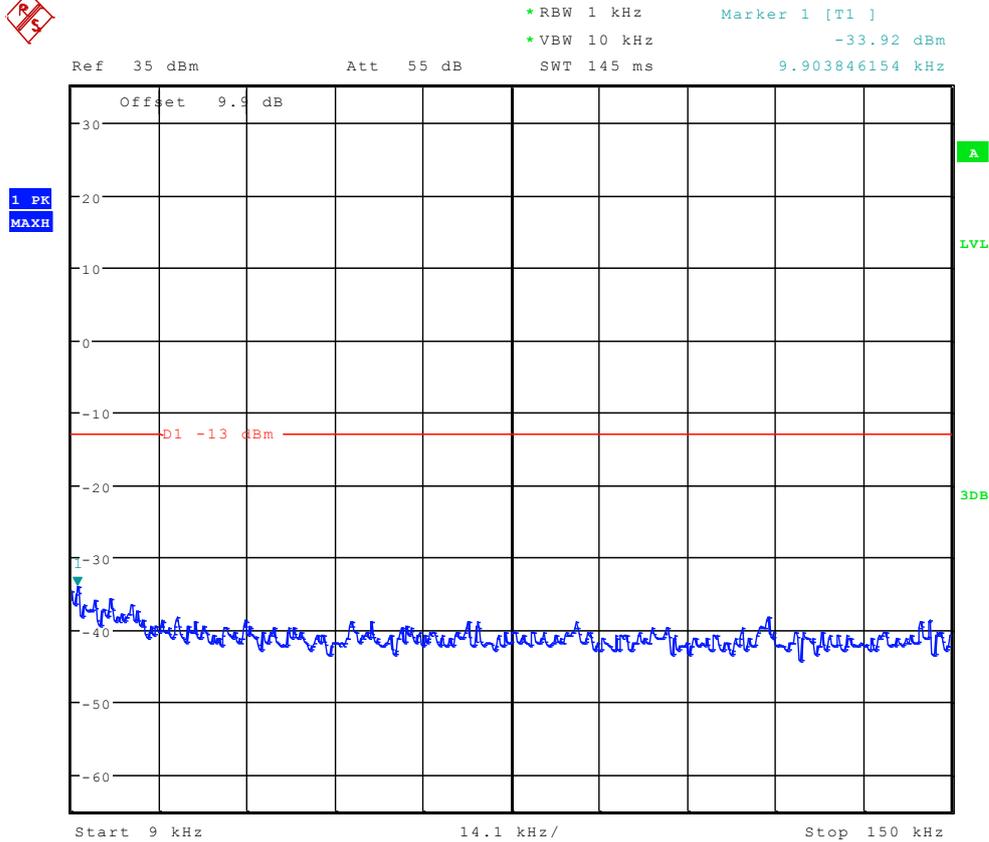

Date: 27.SEP.2011 23:35:07




*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -30.04 dBm
Ref 35 dBm Att 55 dB SWT 300 ms 197.836538462 kHz

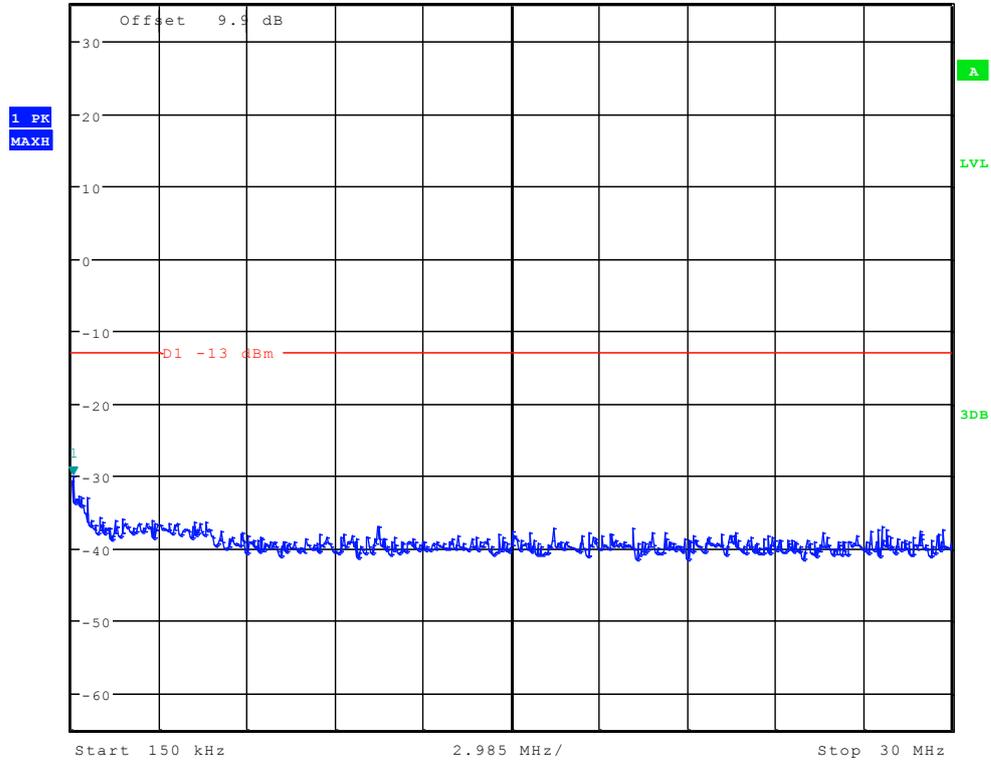

Date: 27.SEP.2011 23:35:51




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 13.51 dBm
Ref 35 dBm Att 50 dB SWT 100 ms 825.897435897 MHz

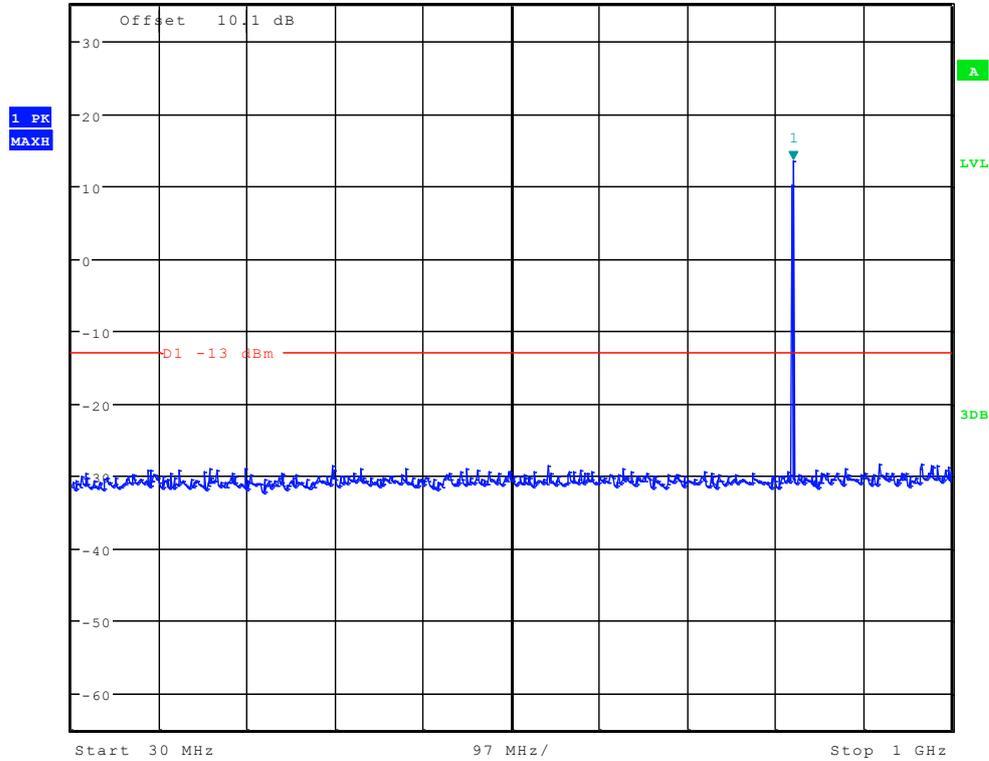

Date: 27.SEP.2011 23:36:35




*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -17.28 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.675881410 GHz

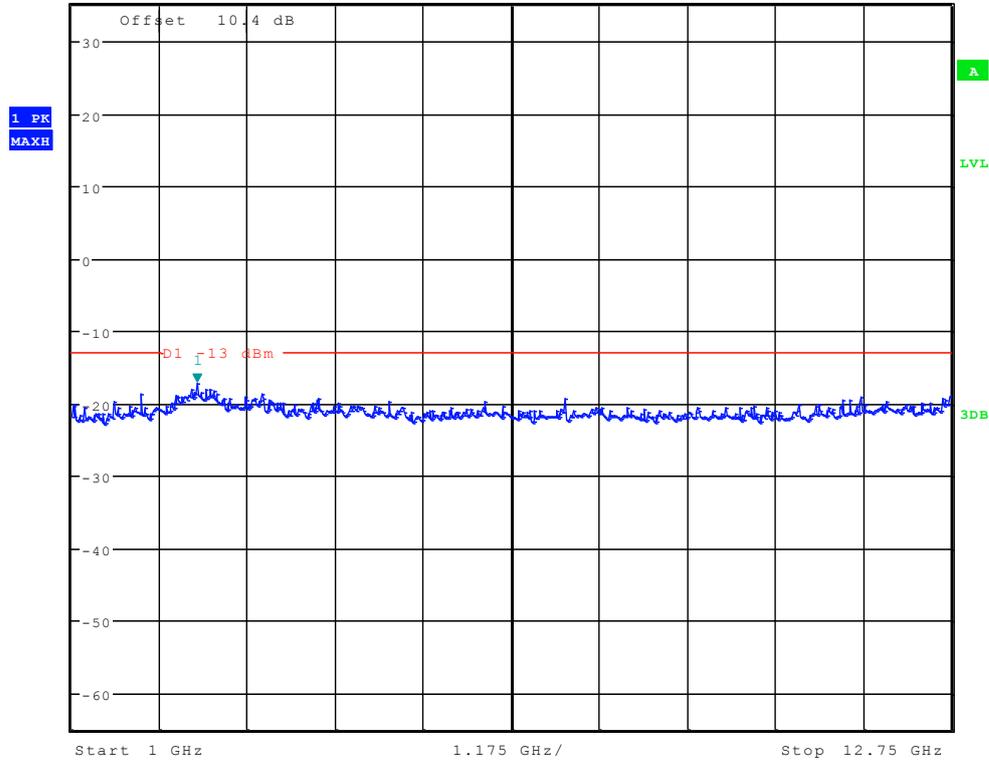

Date: 27.SEP.2011 23:37:19




Channel 192

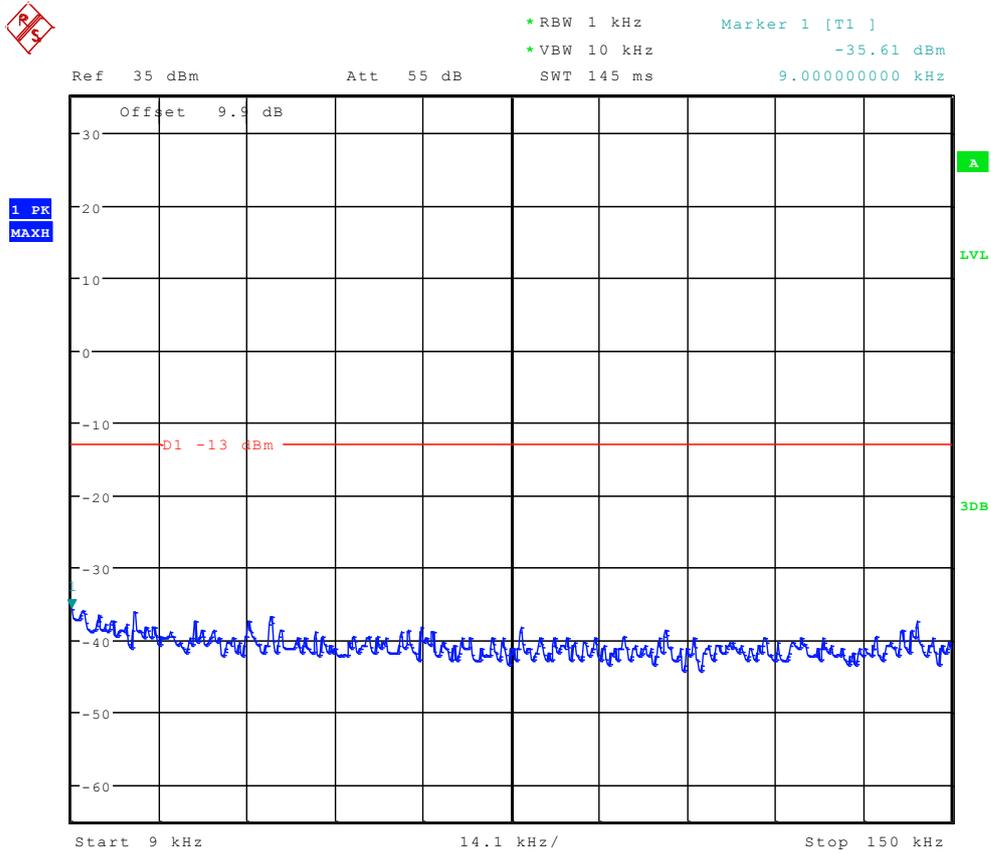

Date: 27.SEP.2011 23:35:22




Ref 35 dBm Att 55 dB SWT 300 ms 150.00000000 kHz
 *RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -29.76 dBm

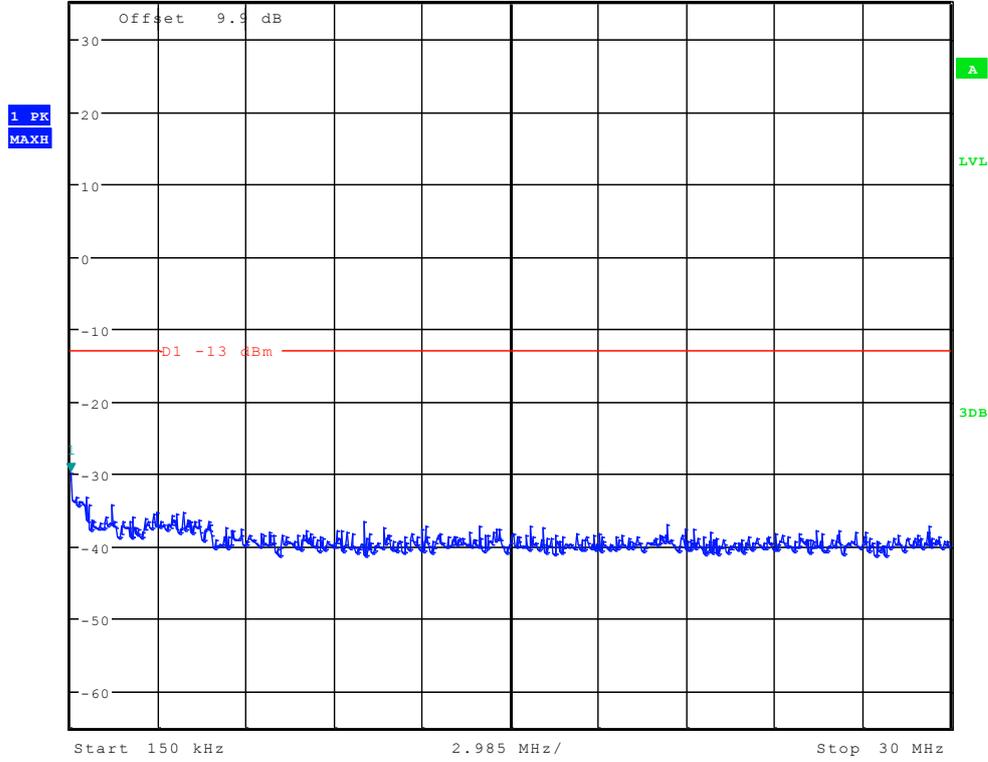

Date: 27.SEP.2011 23:36:06




Ref 35 dBm Att 50 dB SWT 100 ms
*RBW 100 kHz Marker 1 [T1] 13.17 dBm
*VBW 300 kHz 838.333333333 MHz

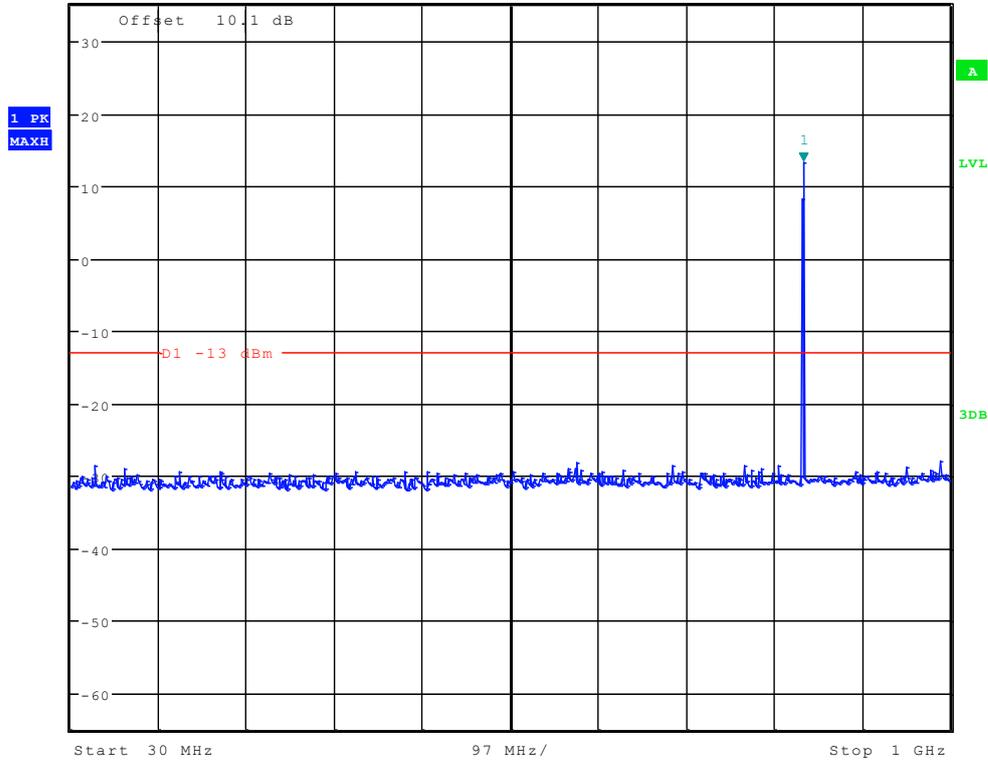

Date: 27.SEP.2011 23:36:50



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -16.88 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.864182692 GHz

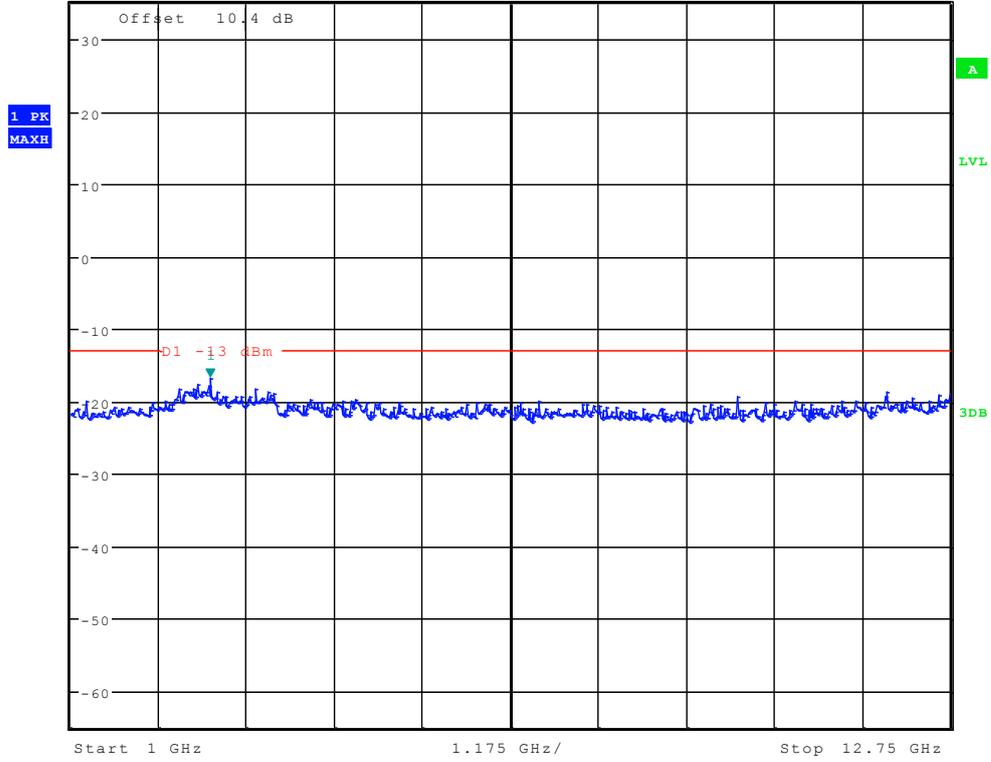


Date: 27.SEP.2011 23:37:34



Channel 251




Ref 35 dBm Att 55 dB *RBW 1 kHz Marker 1 [T1] -34.38 dBm
 *VBW 10 kHz SWT 145 ms 9.225961538 kHz

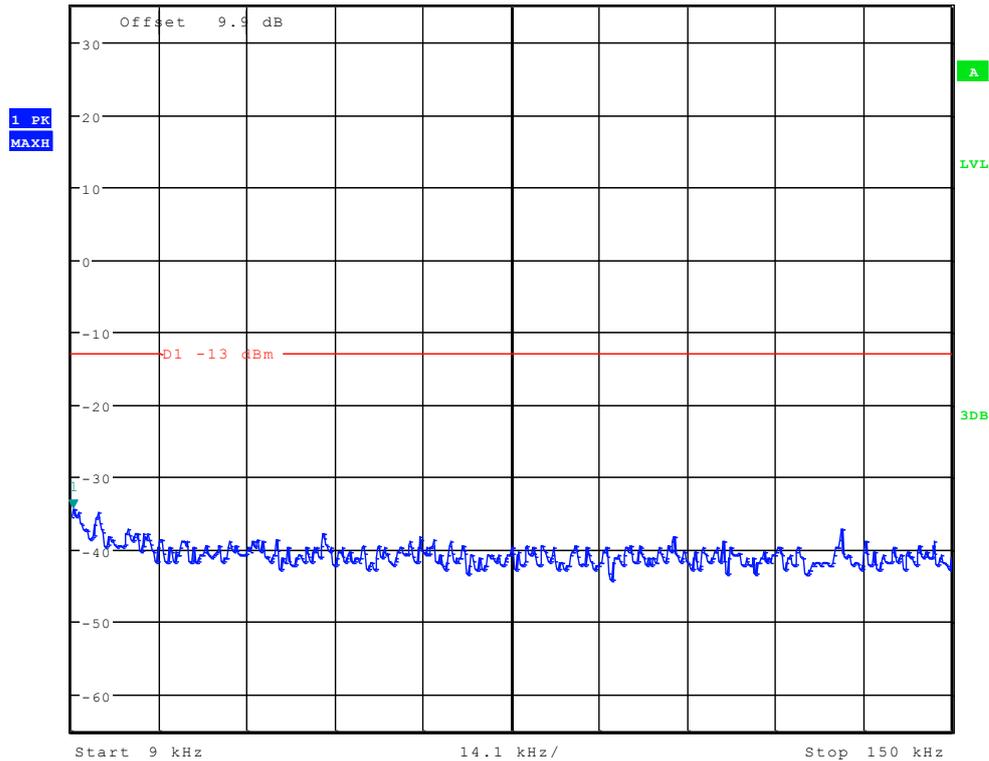

Date: 27.SEP.2011 23:35:36




Ref 35 dBm Att 55 dB SWT 300 ms 150.00000000 kHz
 *RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -28.80 dBm

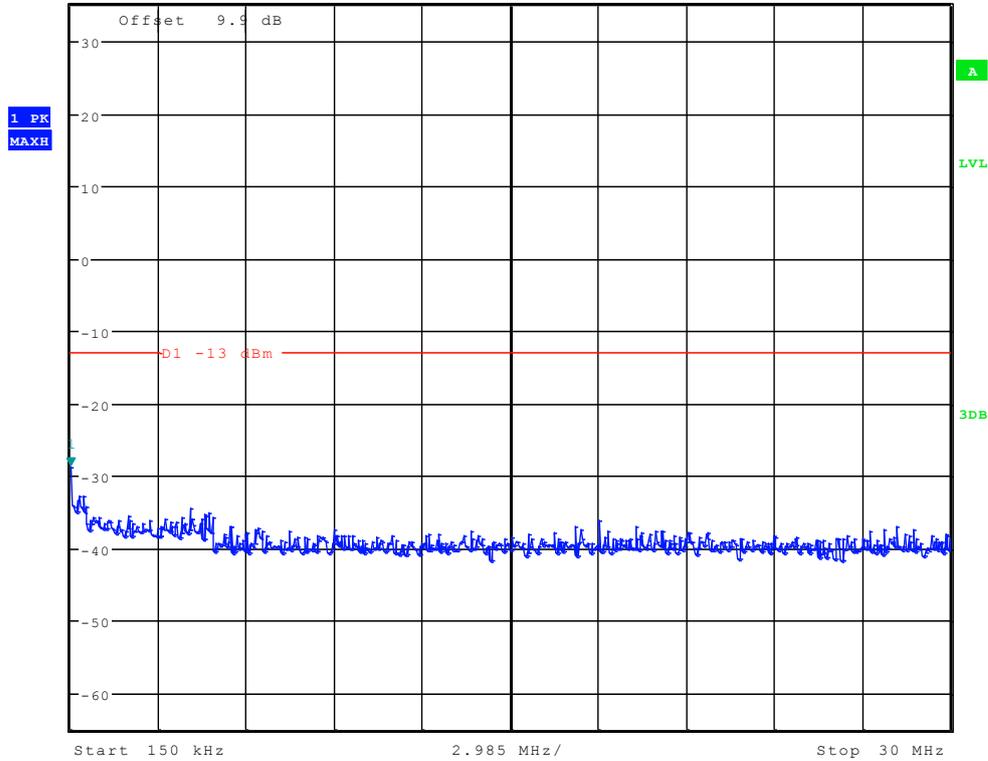

Date: 27.SEP.2011 23:36:20




Ref 35 dBm Att 50 dB SWT 100 ms
 *RBW 100 kHz Marker 1 [T1] 13.24 dBm
 *VBW 300 kHz 849.214743590 MHz

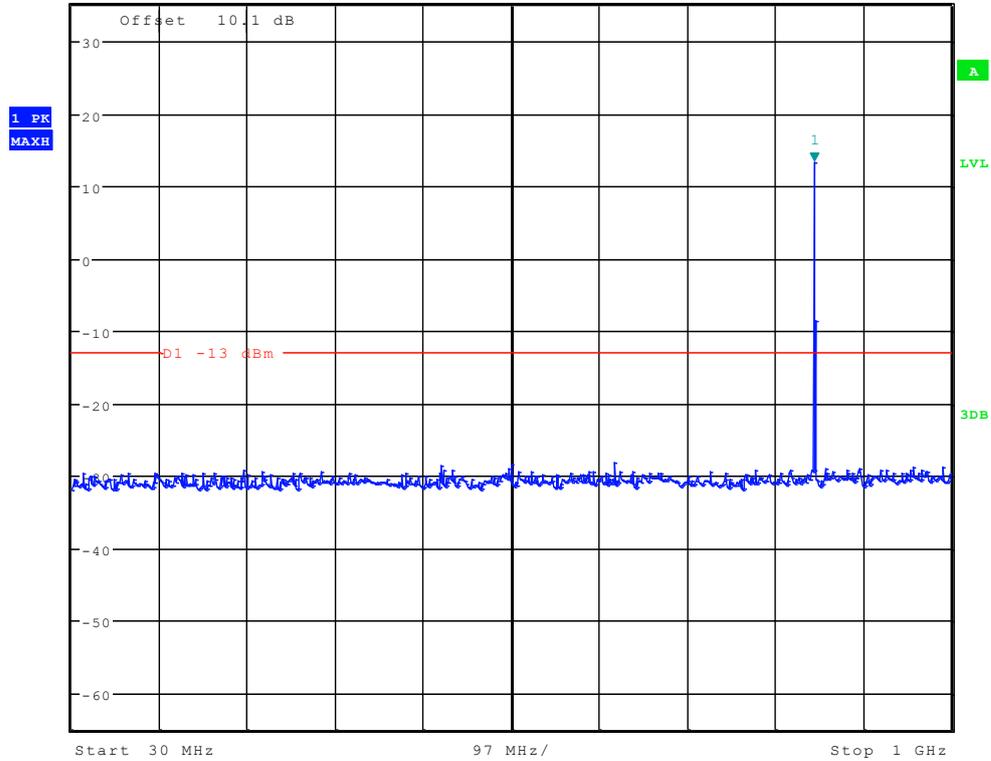

Date: 27.SEP.2011 23:37:04




Ref 35 dBm Att 50 dB SWT 70 ms Marker 1 [T1] -16.83 dBm
2.657051282 GHz

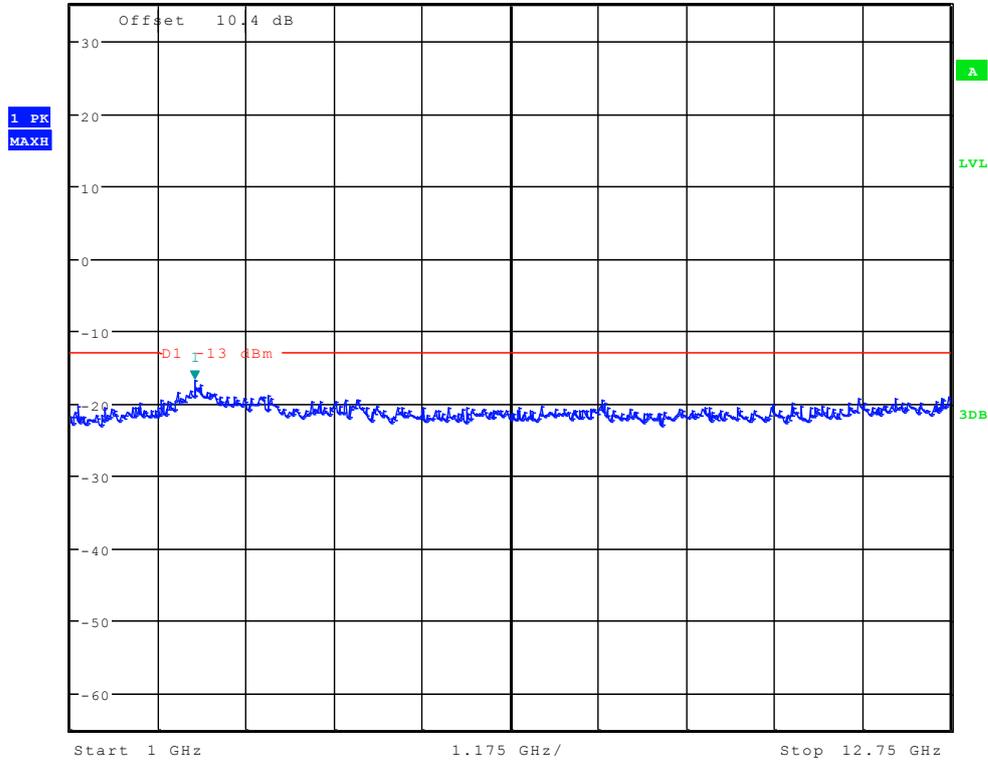

Date: 27.SEP.2011 23:37:48




TM2:EDGE Channel 128

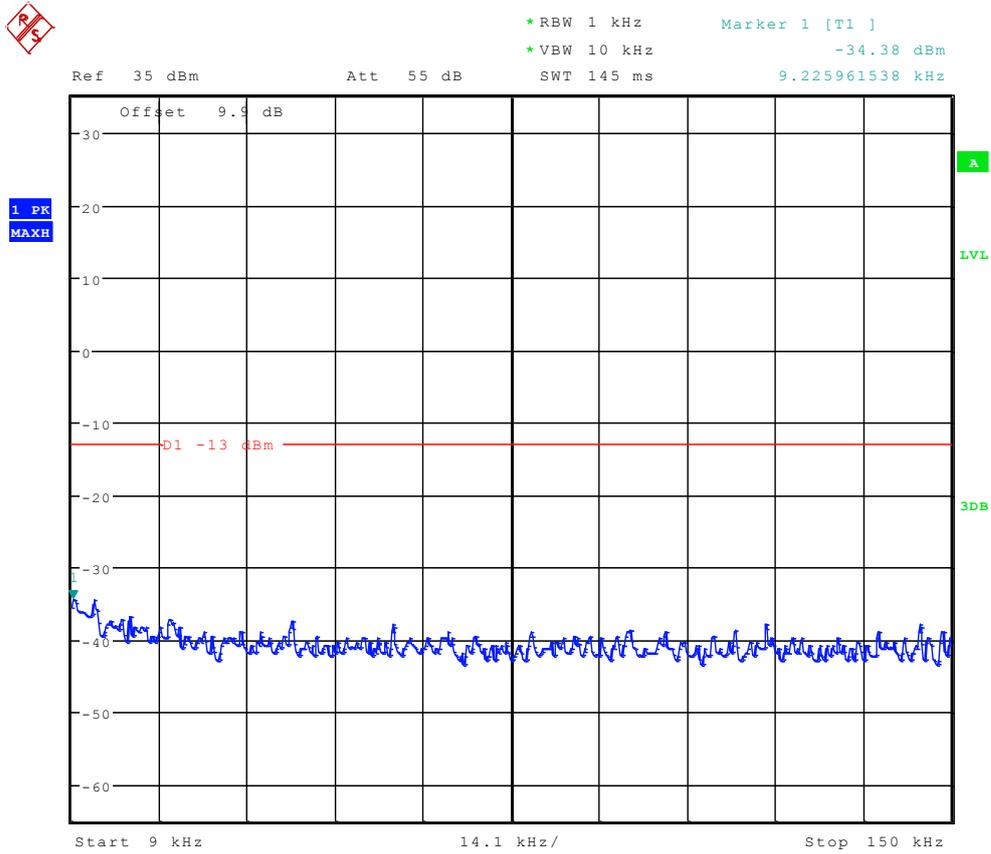


Date: 28.SEP.2011 00:15:56



*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -28.75 dBm
Ref 35 dBm Att 55 dB SWT 300 ms 150.000000000 kHz

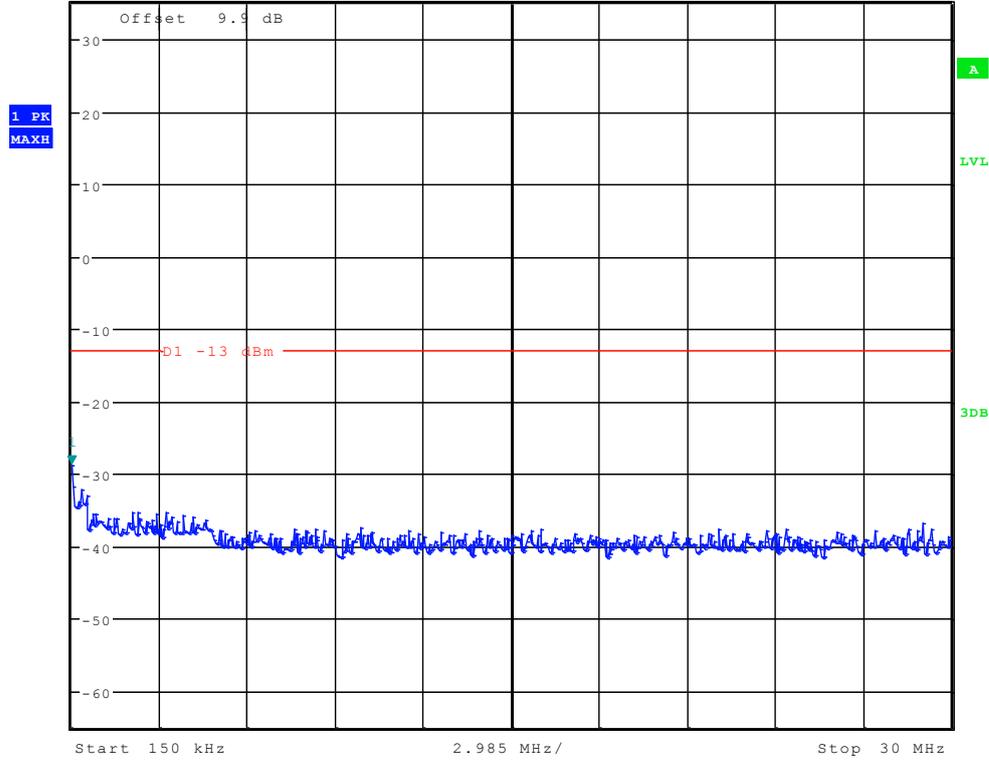


Date: 28.SEP.2011 00:16:39

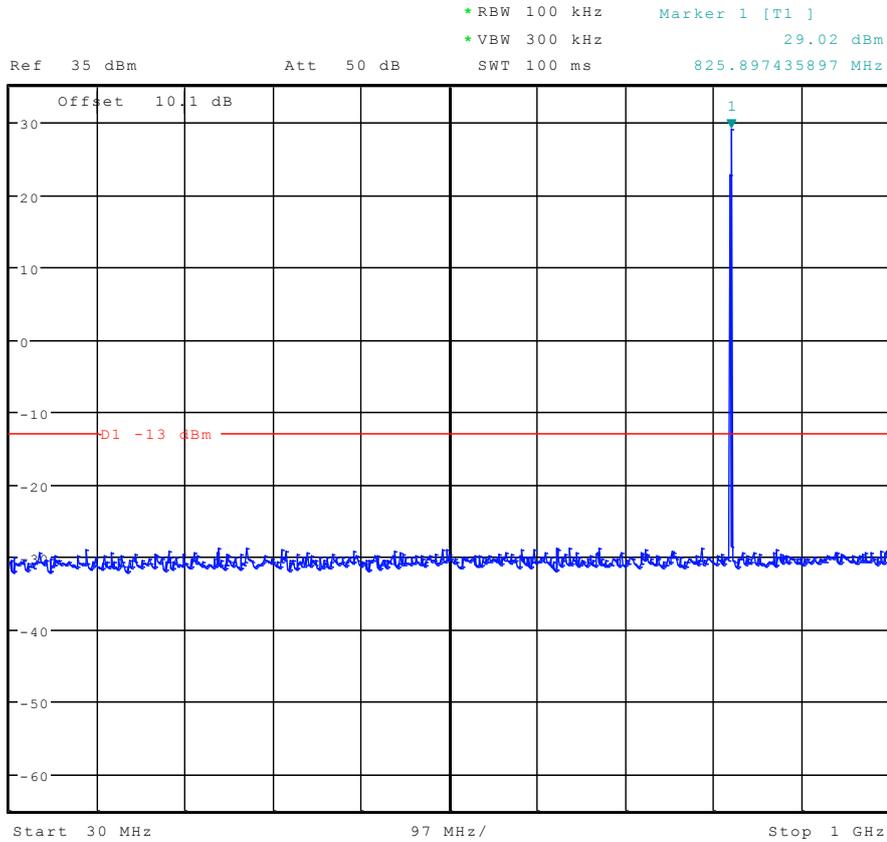

Date: 28.SEP.2011 00:17:23




*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -17.42 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.826522436 GHz

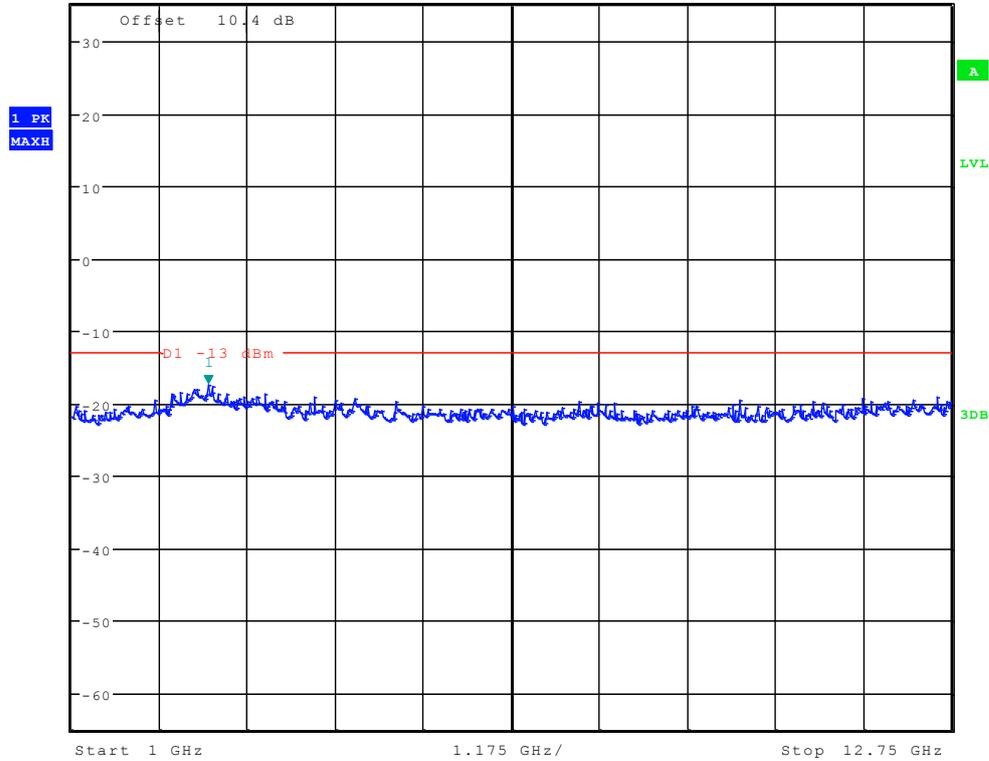

Date: 28.SEP.2011 00:18:07




Channel 192

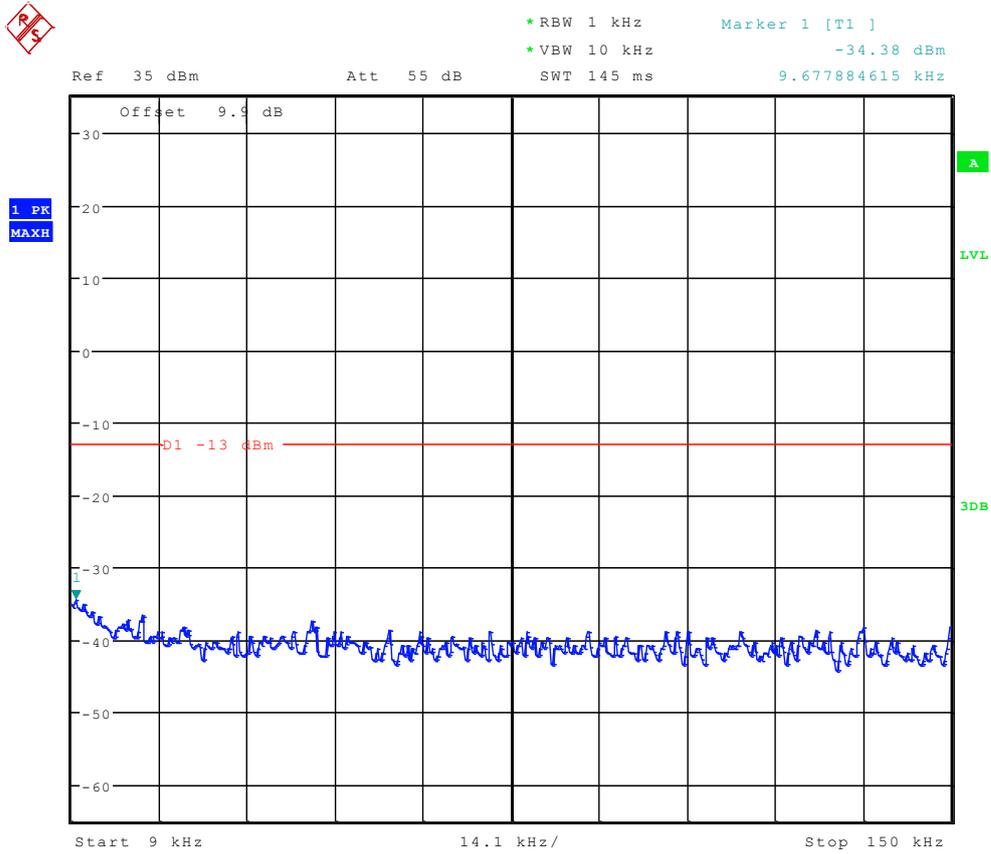

Date: 28.SEP.2011 00:16:10




Ref 35 dBm Att 55 dB SWT 300 ms 150.00000000 kHz
 *RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -28.13 dBm

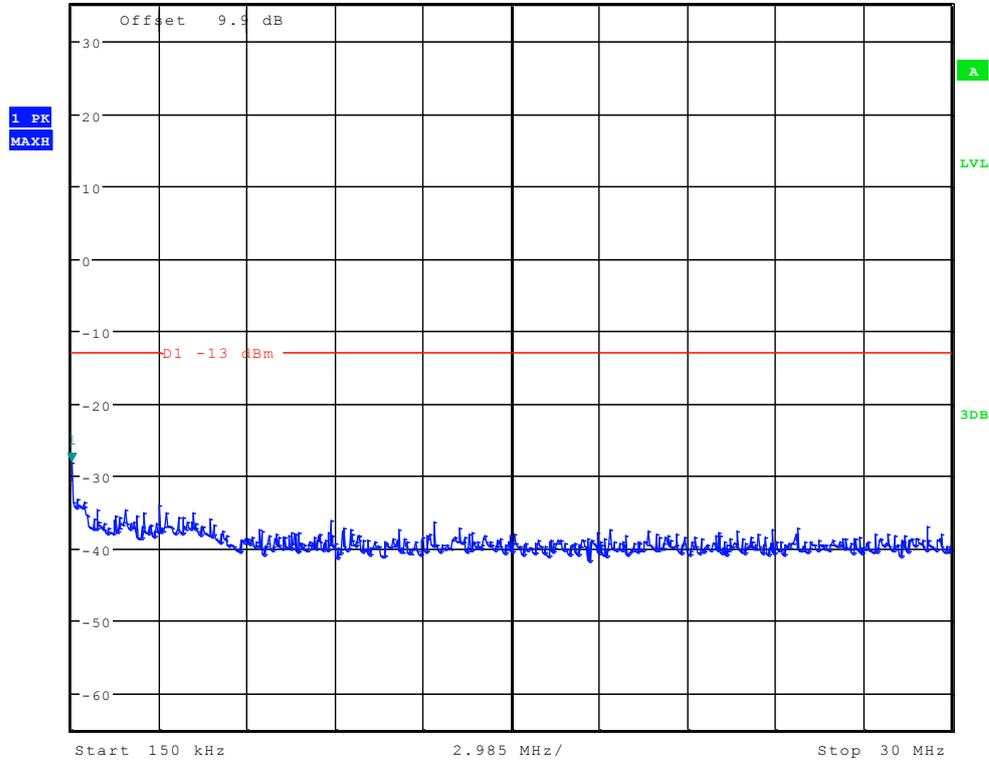

Date: 28.SEP.2011 00:16:54




Ref 35 dBm Att 50 dB SWT 100 ms
 *RBW 100 kHz Marker 1 [T1] 28.95 dBm
 *VBW 300 kHz 838.333333333 MHz

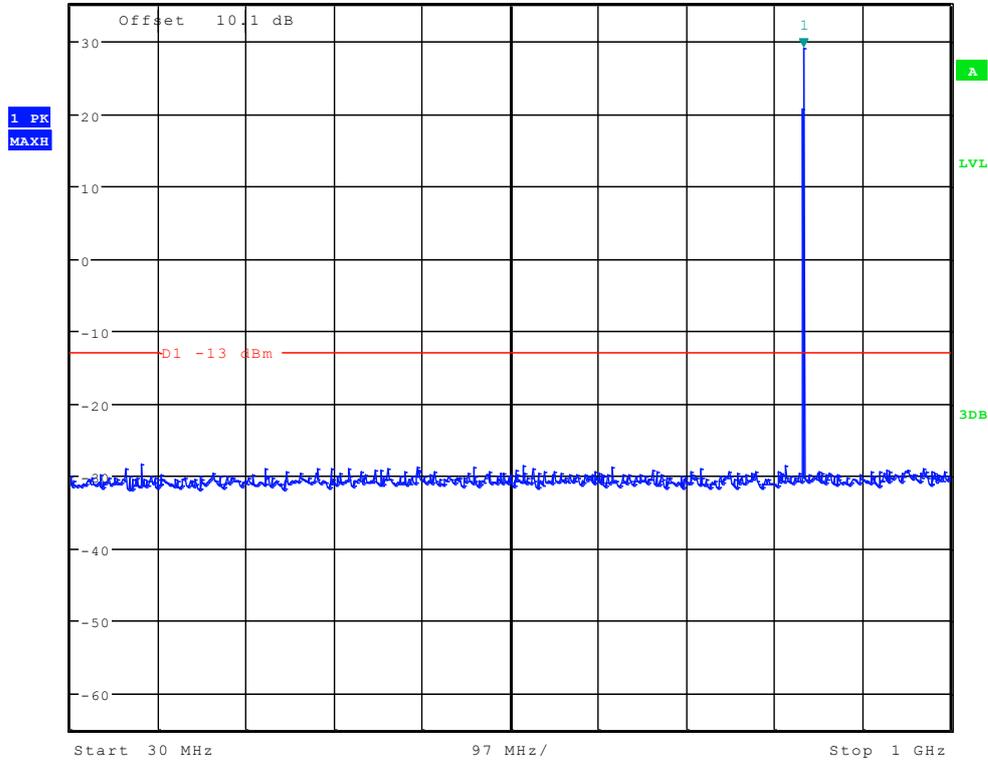

Date: 28.SEP.2011 00:17:38




*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -17.41 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.864182692 GHz

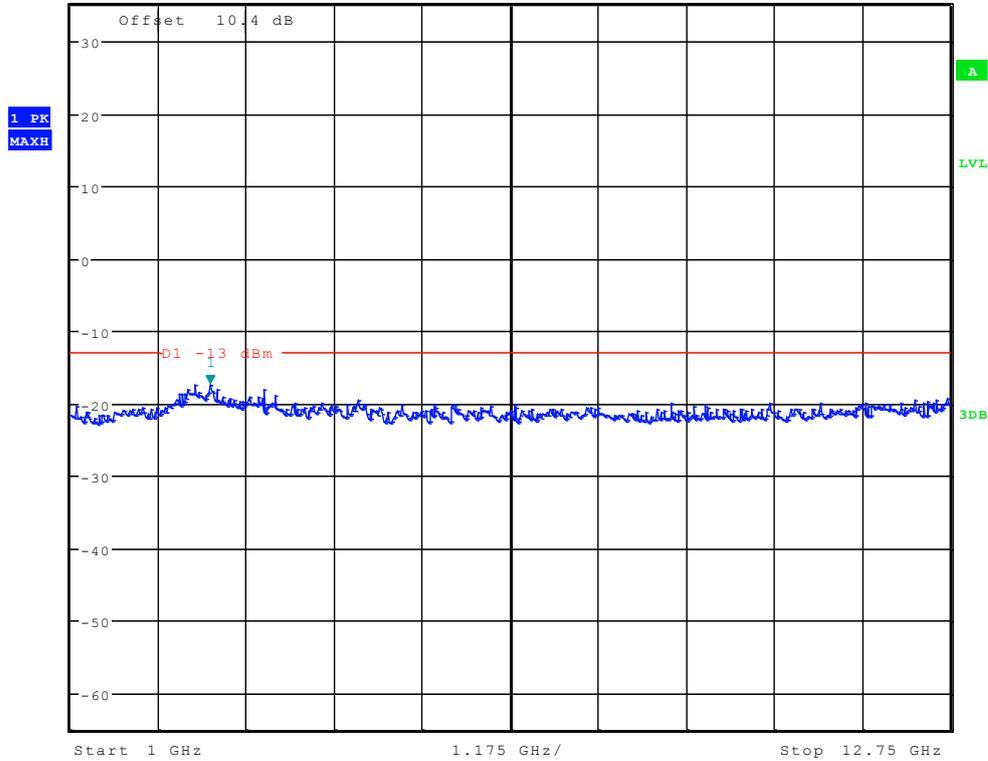

Date: 28.SEP.2011 00:18:22




Channel 251

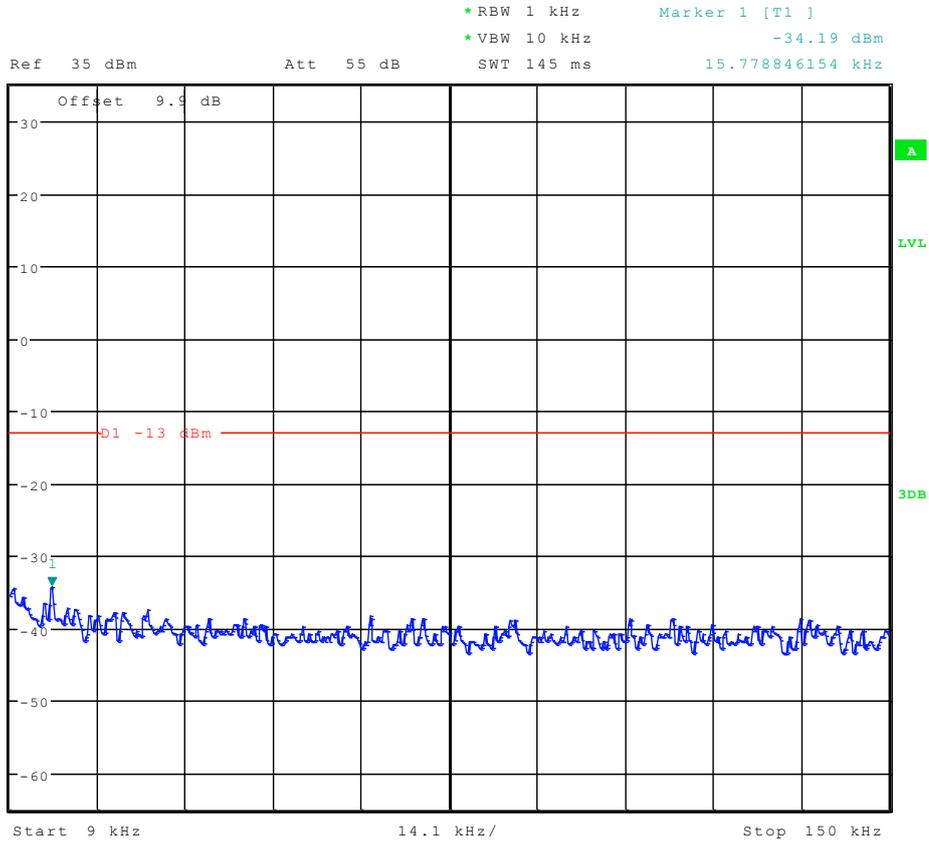


Date: 28.SEP.2011 00:16:24



Ref 35 dBm Att 55 dB SWT 300 ms 150.00000000 kHz
 *RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -30.64 dBm

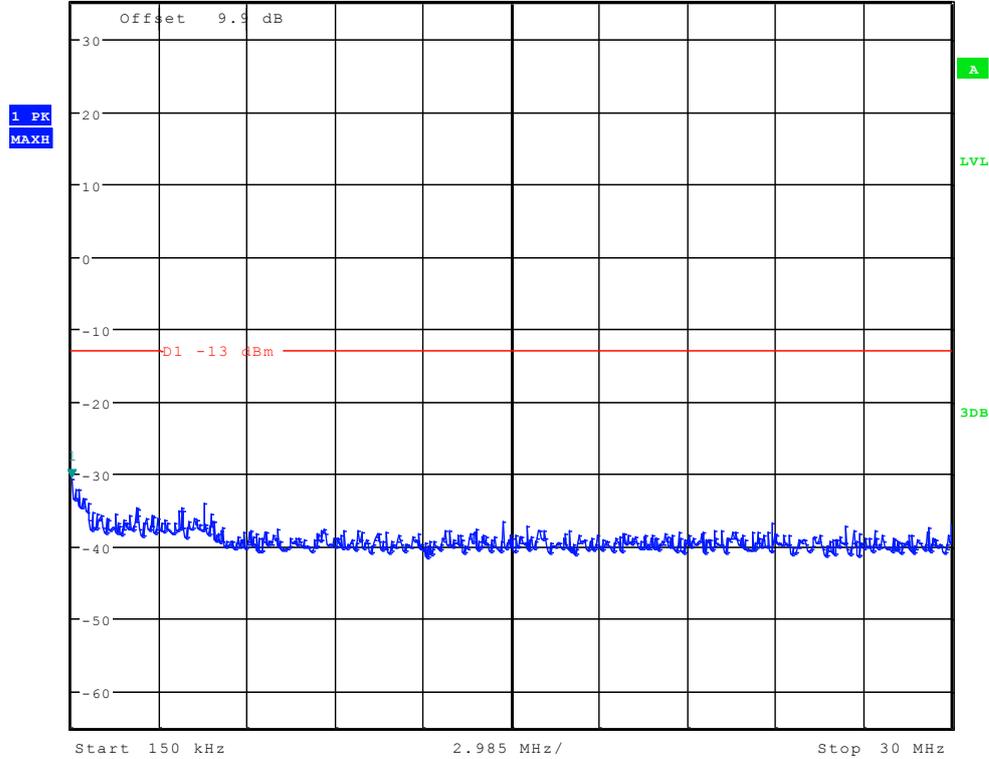


Date: 28.SEP.2011 00:17:08

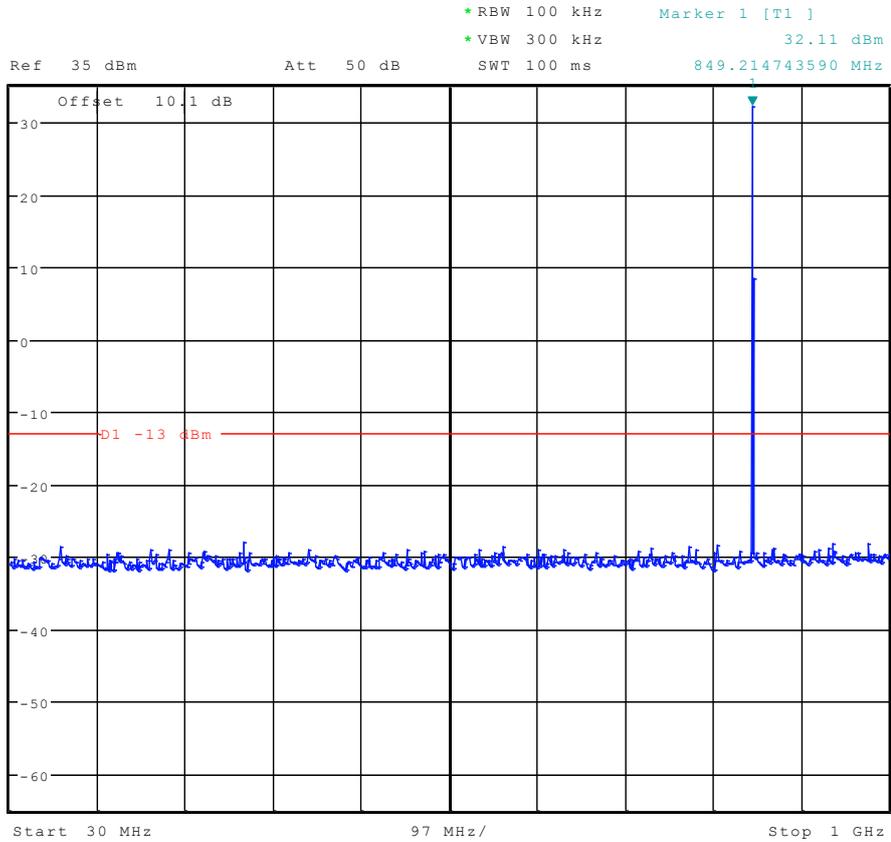

Date: 28.SEP.2011 00:17:52




*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -17.00 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.600560897 GHz

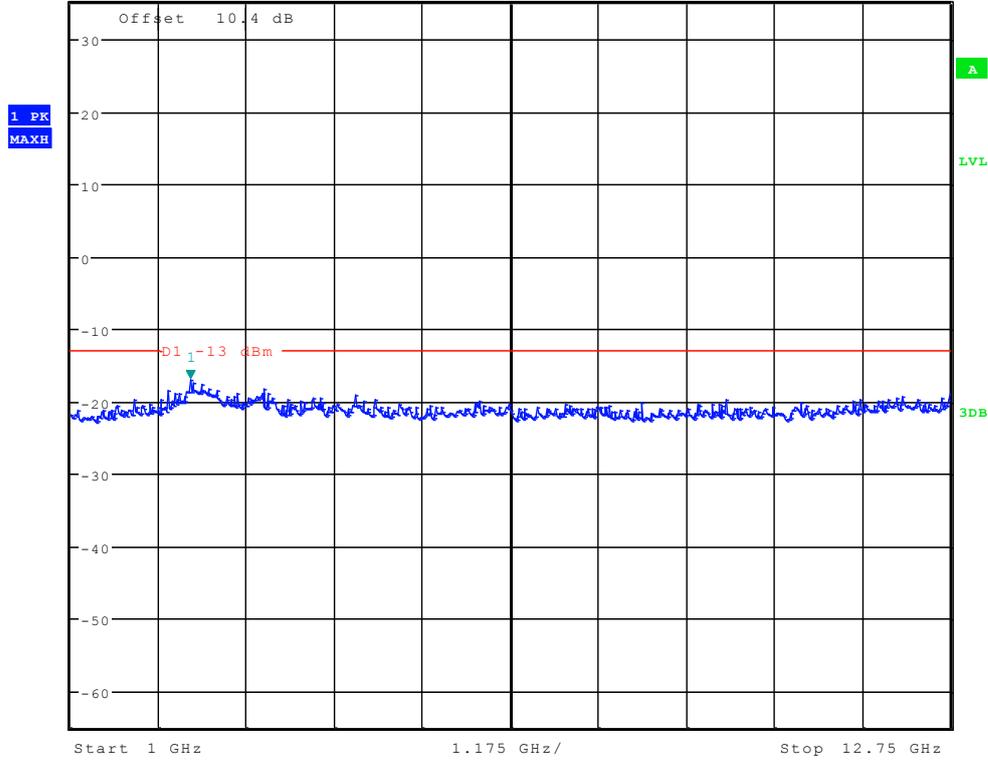

Date: 28.SEP.2011 00:18:36




TM3: WCDMA Channel 4132

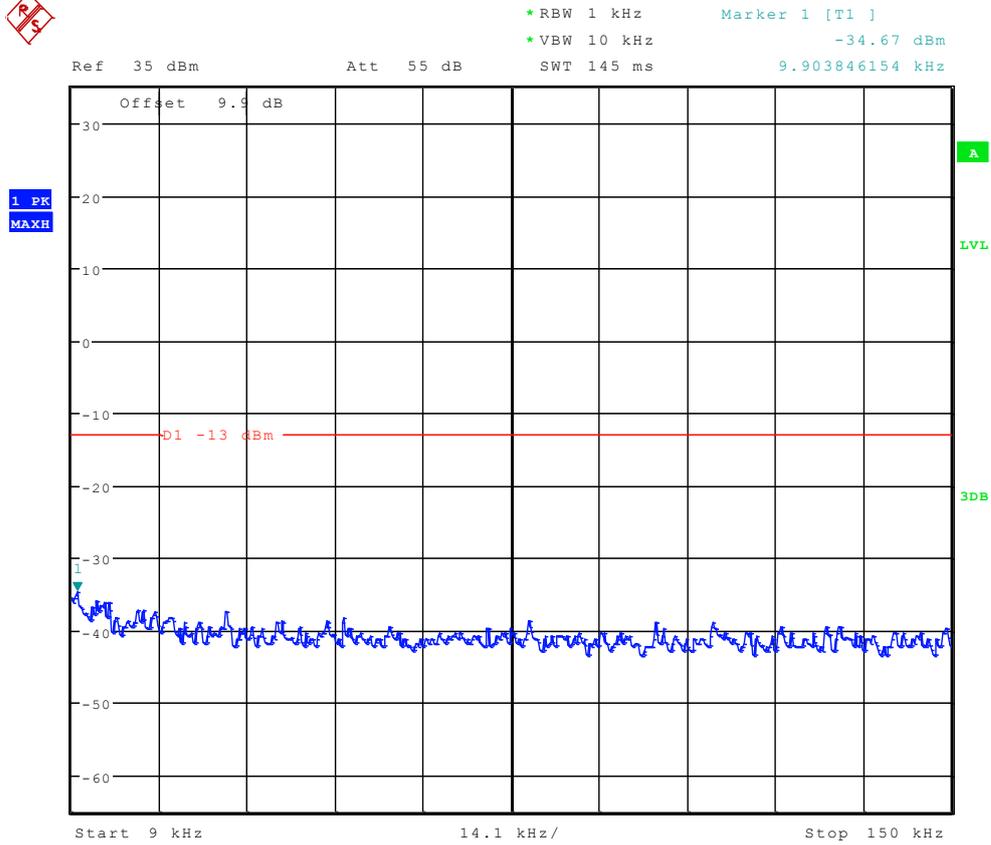

Date: 27.SEP.2011 23:48:45




Ref 35 dBm Att 55 dB SWT 300 ms 150.00000000 kHz
 *RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -28.60 dBm

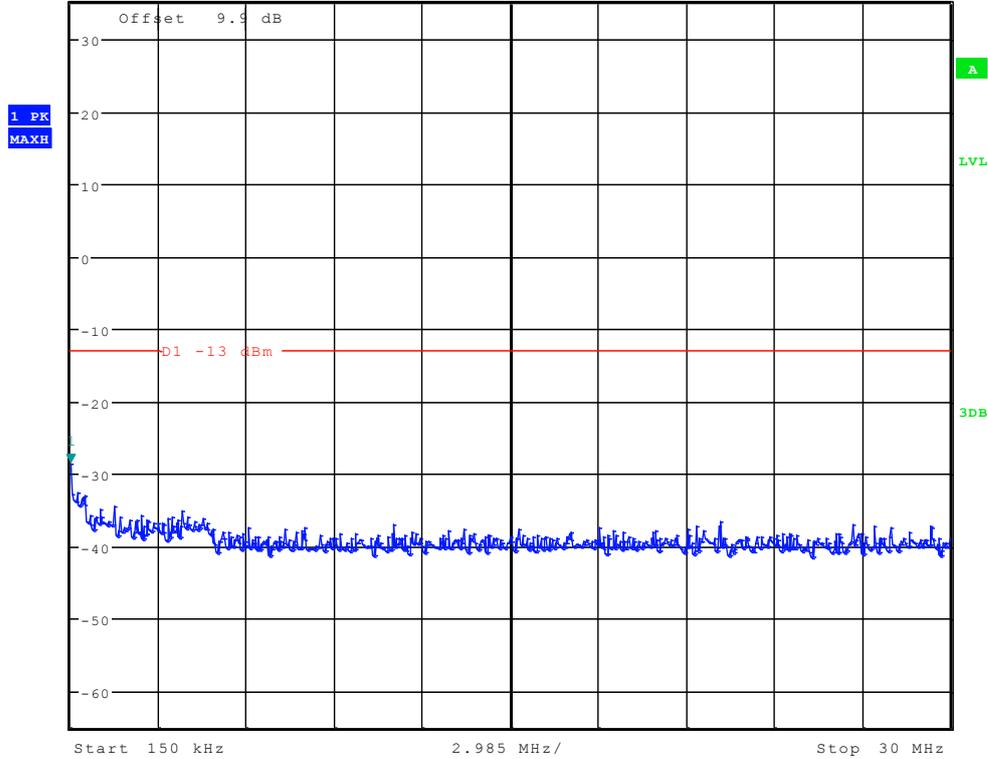

Date: 27.SEP.2011 23:49:29




Ref 35 dBm Att 50 dB SWT 100 ms
 *RBW 100 kHz Marker 1 [T1] 16.15 dBm
 *VBW 300 kHz 827.451923077 MHz

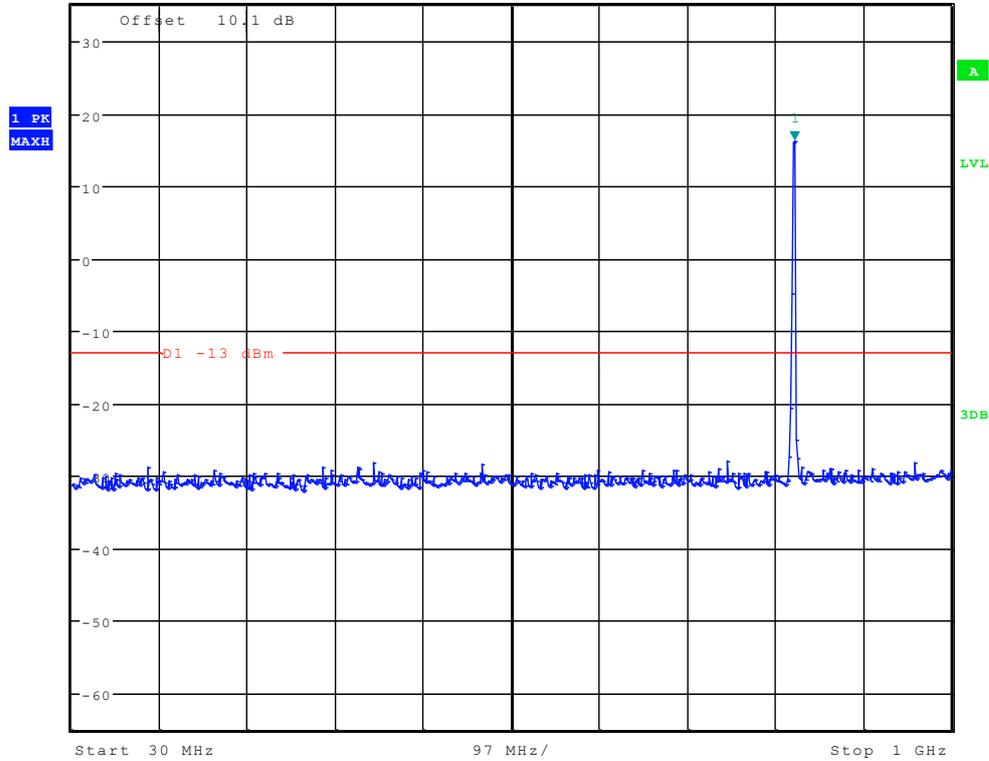

Date: 27.SEP.2011 23:50:13



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -16.69 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.845352564 GHz

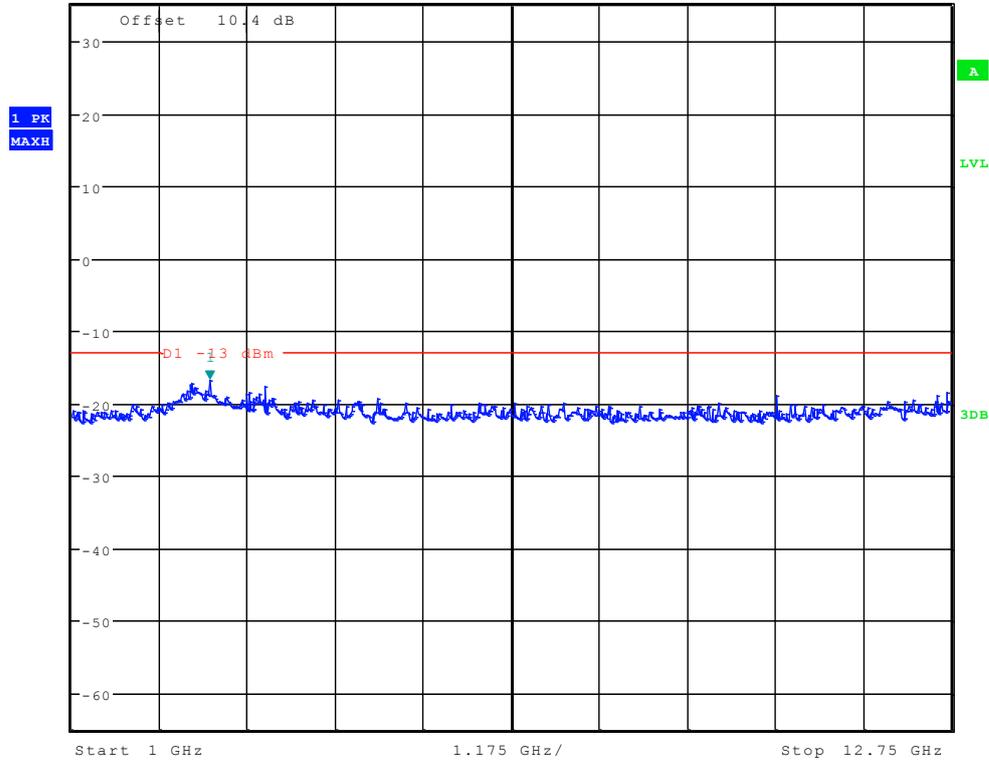


Date: 27.SEP.2011 23:50:58



Channel 4182




*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -33.92 dBm
SWT 145 ms 10.129807692 kHz

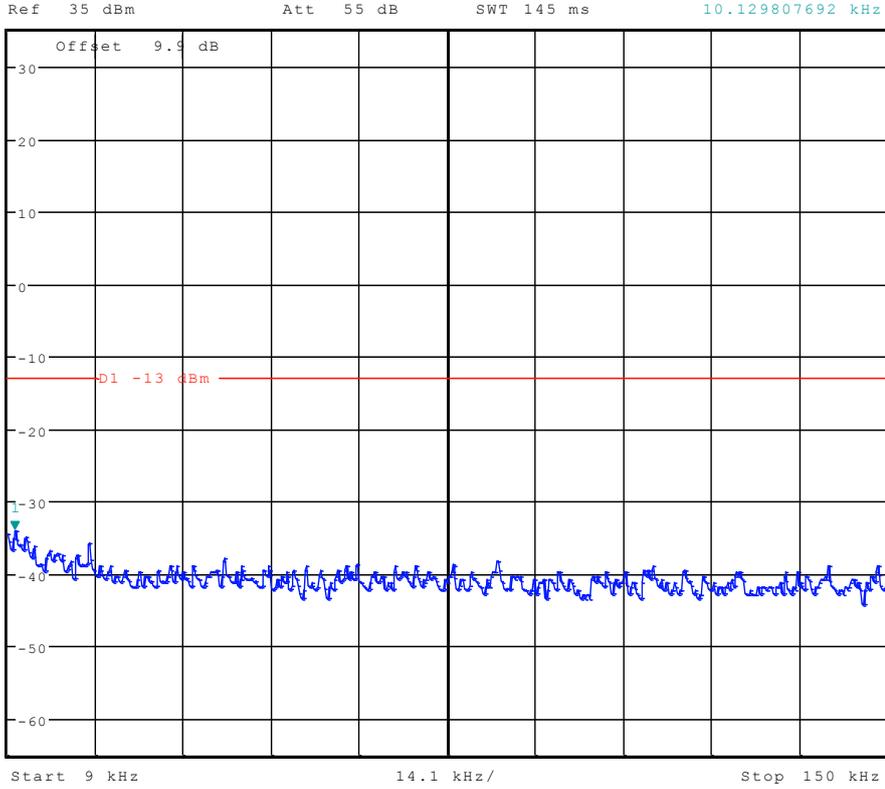


Date: 27.SEP.2011 23:49:00



*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -30.22 dBm
Ref 35 dBm Att 55 dB SWT 300 ms 150.000000000 kHz

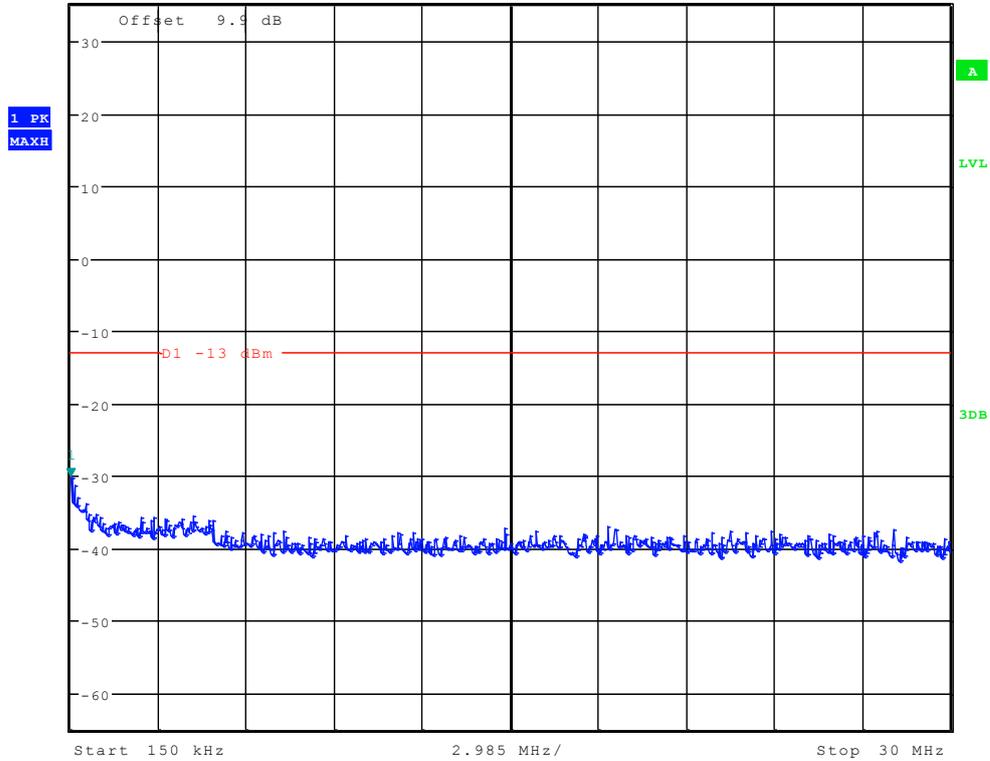


Date: 27.SEP.2011 23:49:44

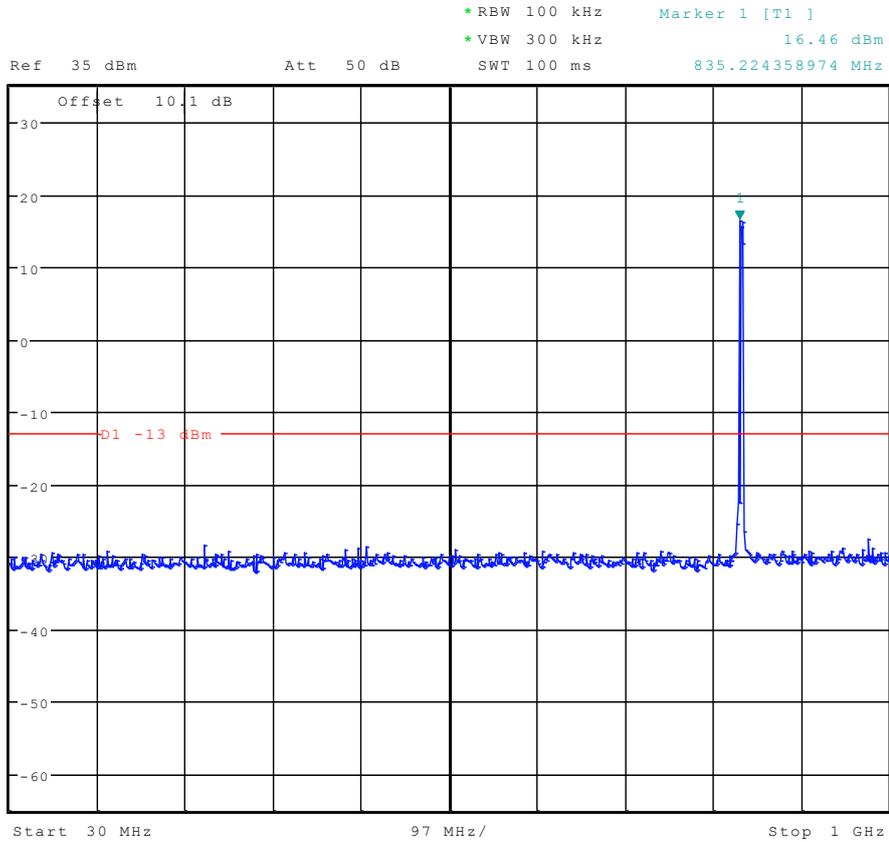

Date: 27.SEP.2011 23:50:28



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -17.54 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.732371795 GHz

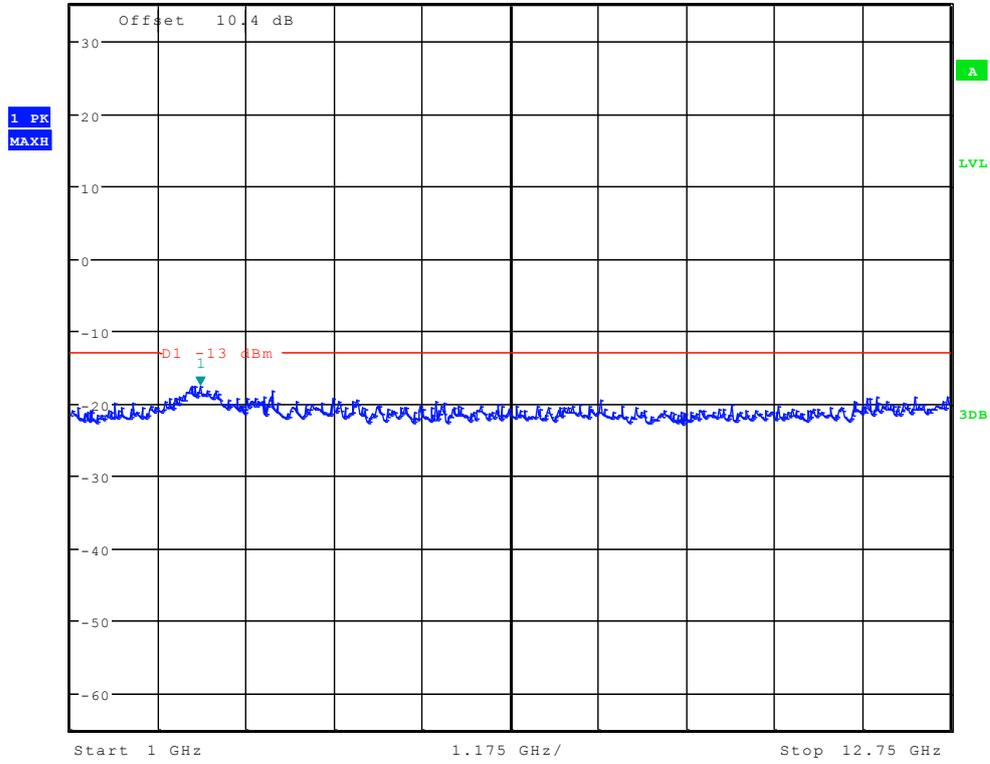


Date: 27.SEP.2011 23:51:12



Channel 4233




*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -33.48 dBm
SWT 145 ms 9.225961538 kHz

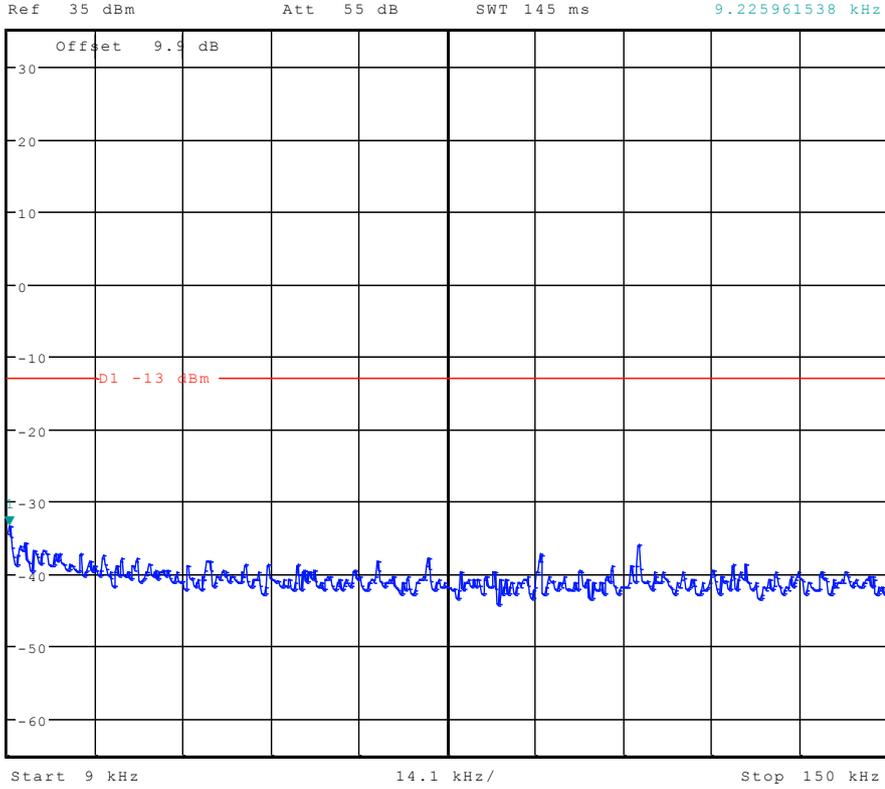

Date: 27.SEP.2011 23:49:14




Ref 35 dBm Att 55 dB SWT 300 ms 150.00000000 kHz
 *RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -30.52 dBm

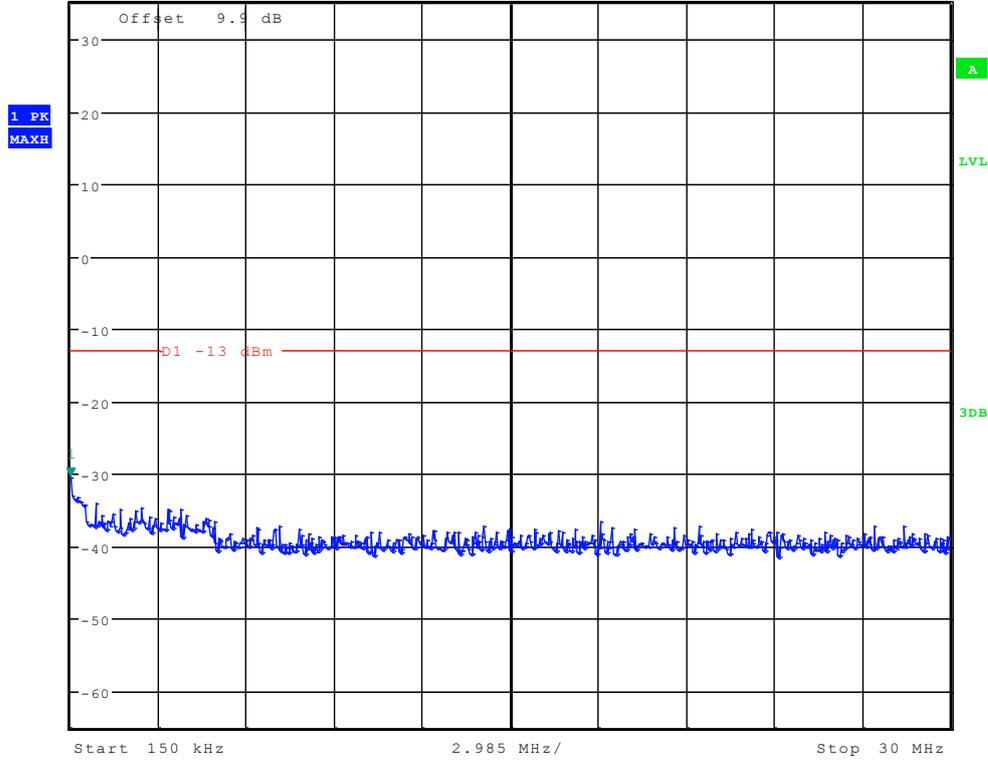

Date: 27.SEP.2011 23:49:58




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 16.99 dBm
Ref 35 dBm Att 50 dB SWT 100 ms 847.660256410 MHz

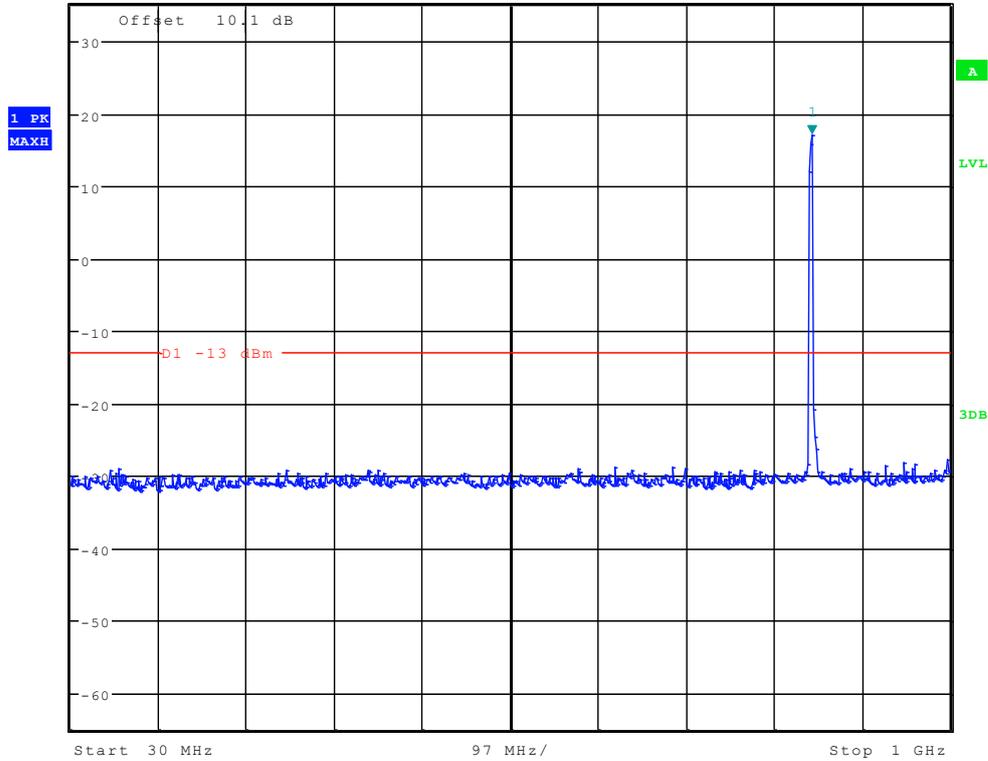

Date: 27.SEP.2011 23:50:42



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -16.35 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.581730769 GHz

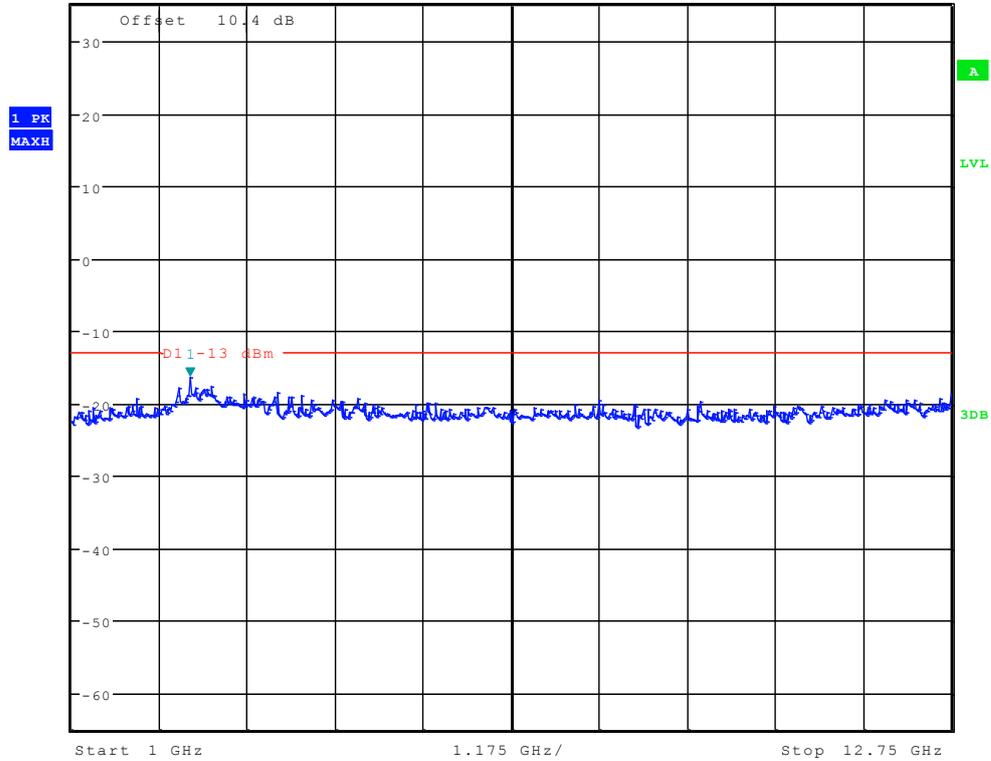

Date: 27.SEP.2011 23:51:27




Appendix E

Radiated spurious emission


According to FCC Part 2.1053& Part 22.917

GPRS 850


(9kHz~30MHz)

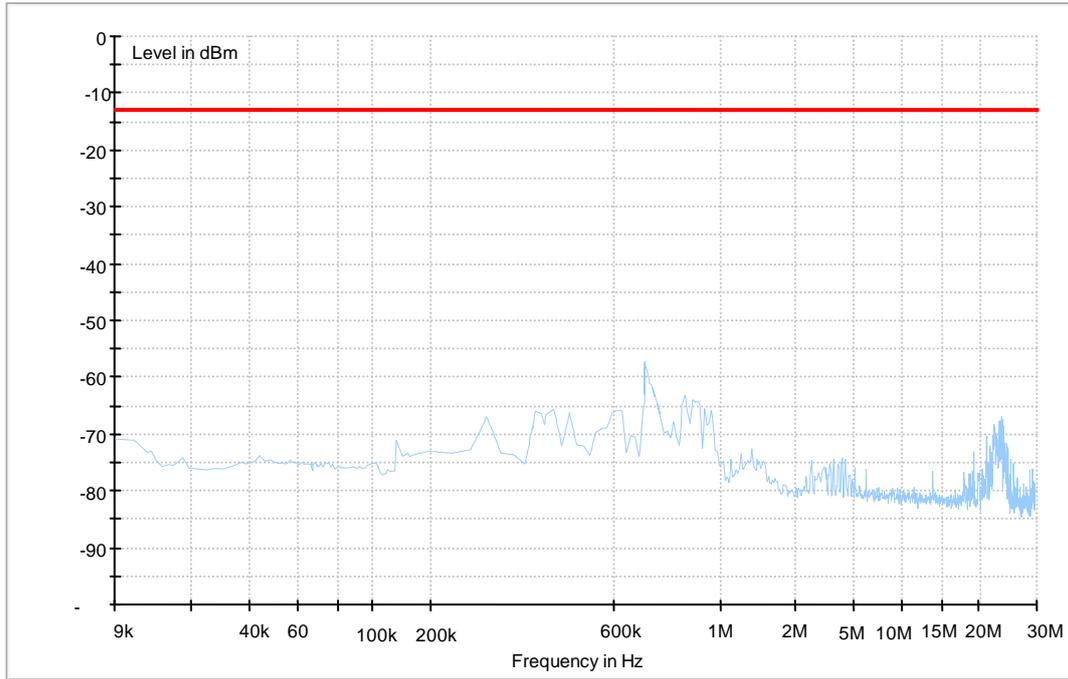

(30MHz~2GHz)

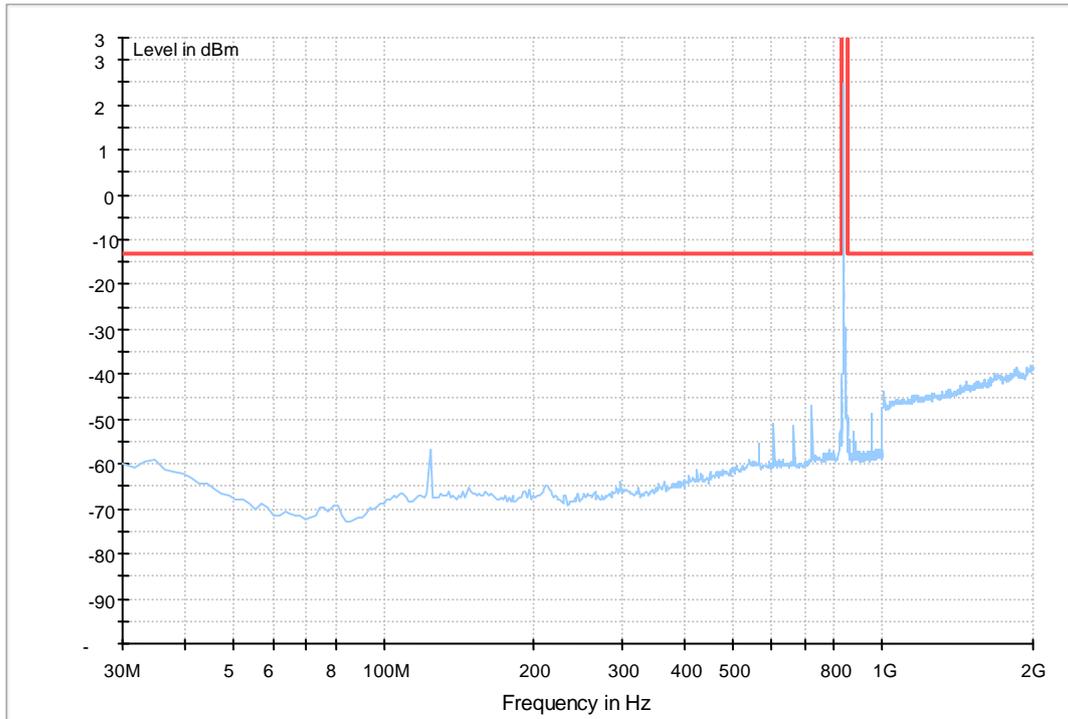


(2GHz~18GHz)

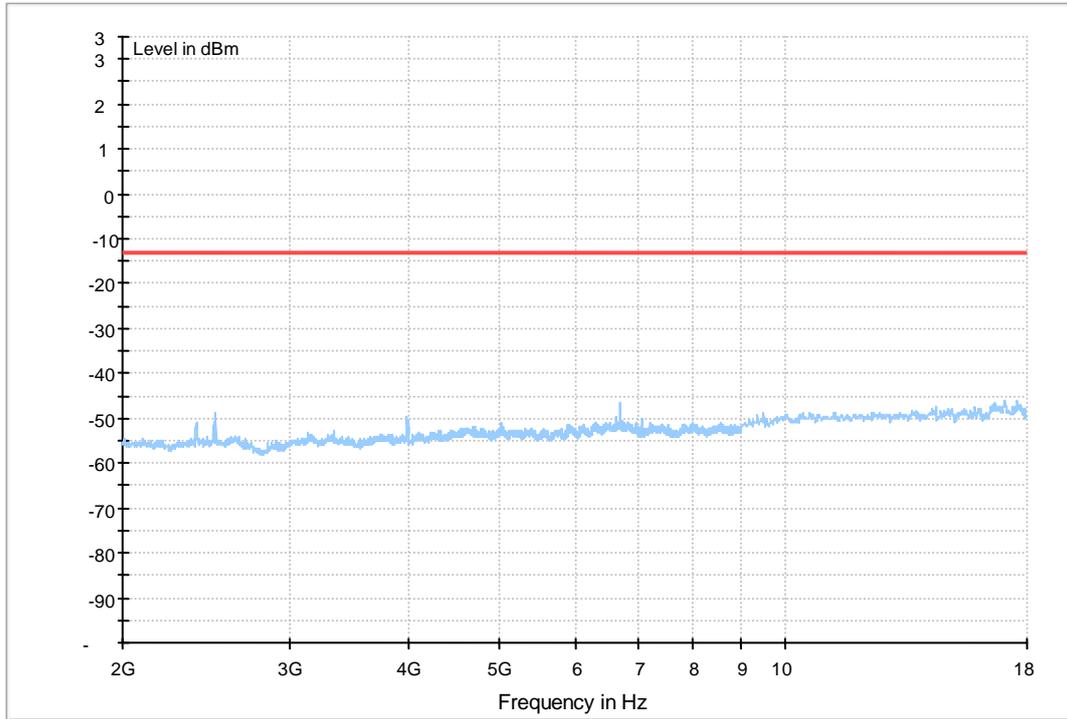


EDGE 850


(9kHz~30MHz)

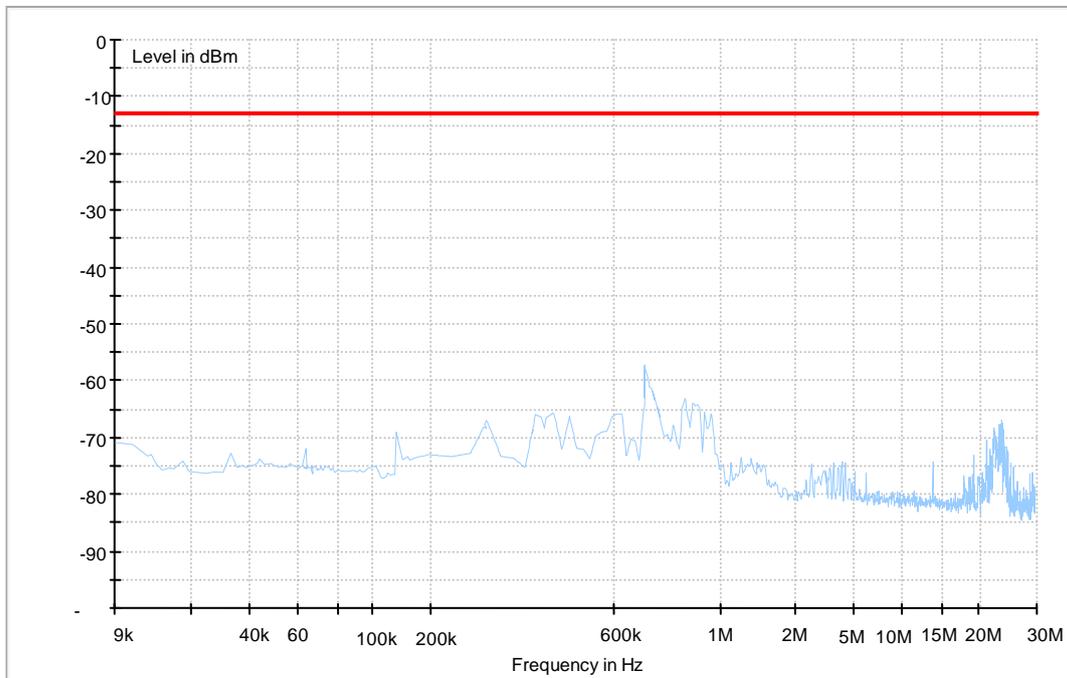

(30MHz~2GHz)

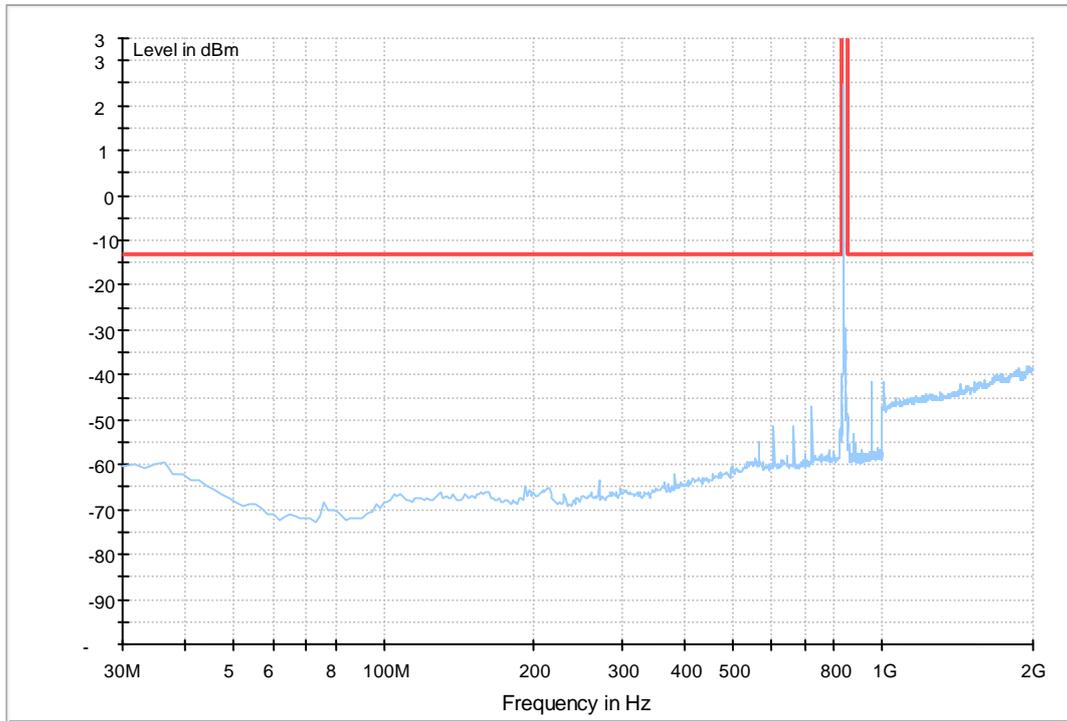


(2GHz~18GHz)

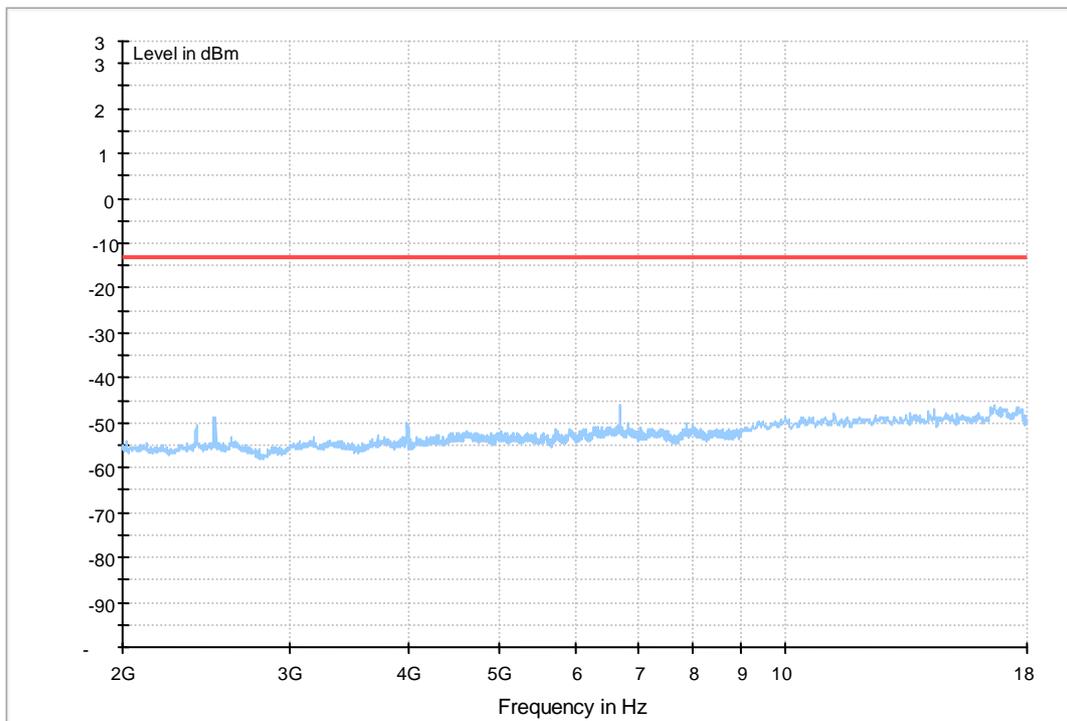


WCDMA Band V


(9KHz~30MHz)

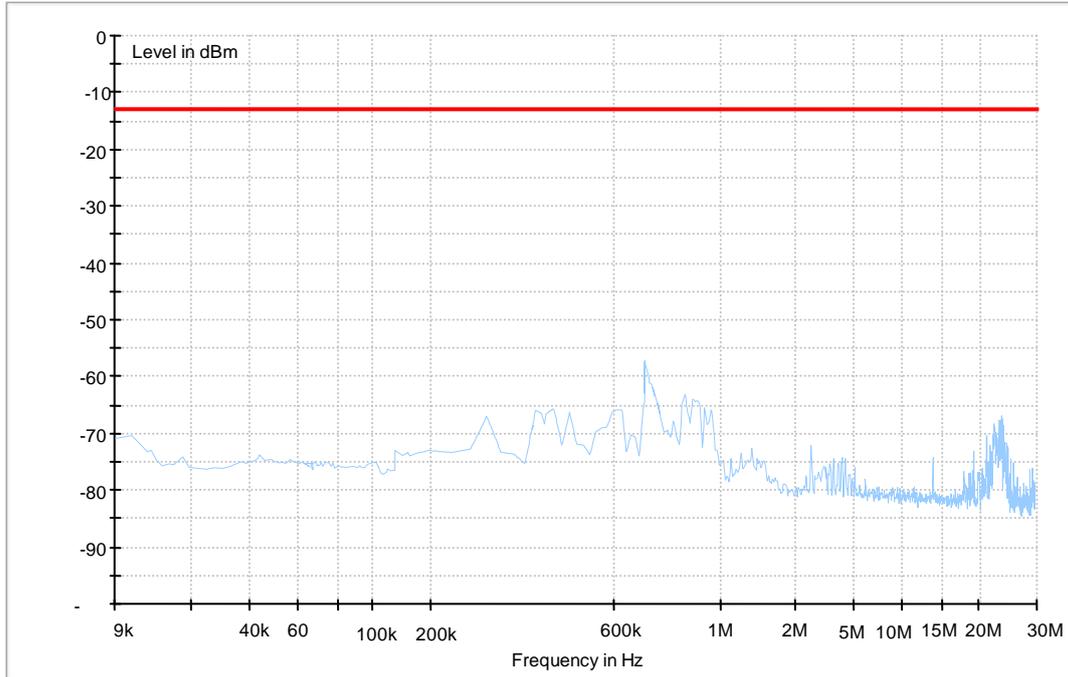

(30MHz~2GHz)

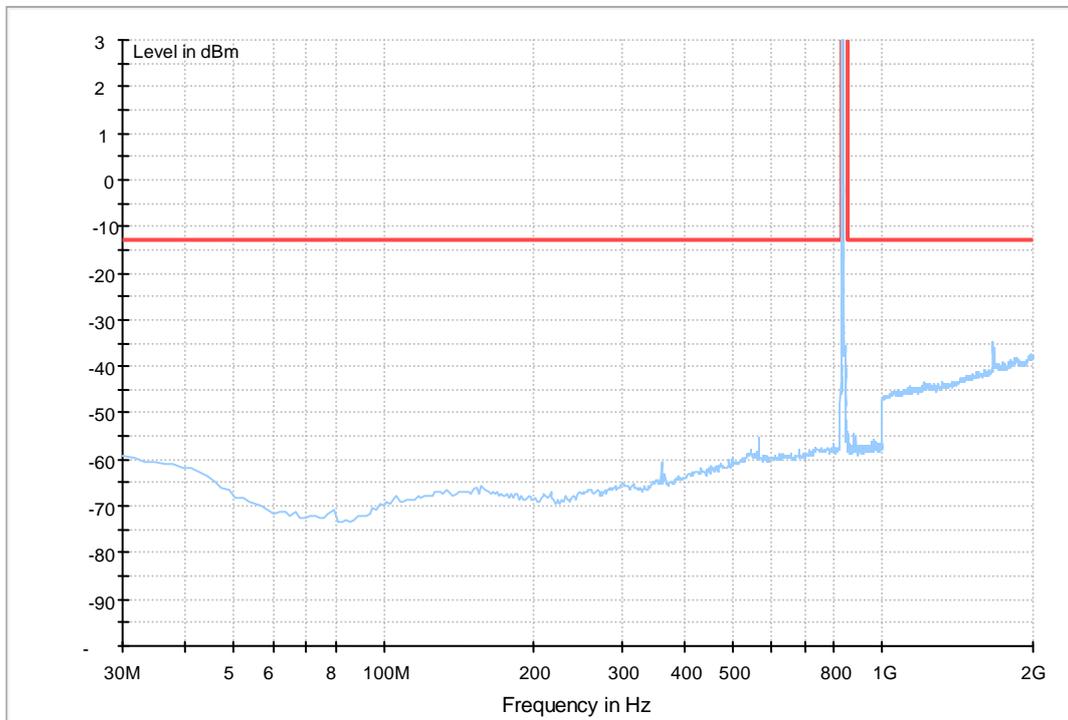


(2GHz~18GHz)

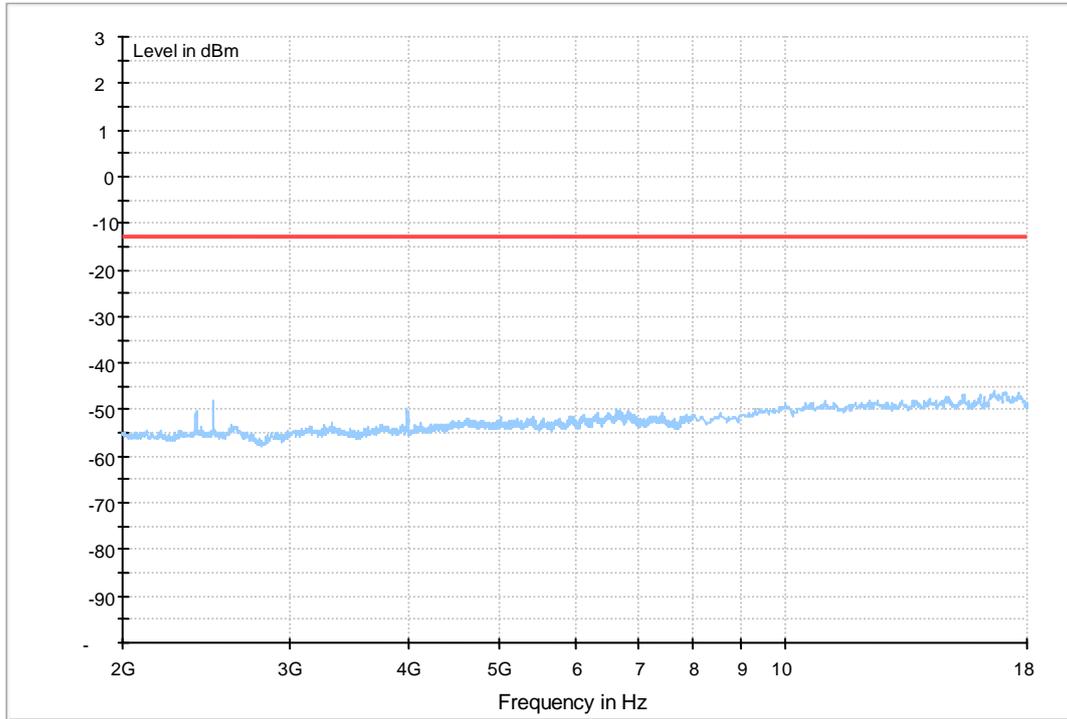


HSDPA Band V


(9KHz~30MHz)

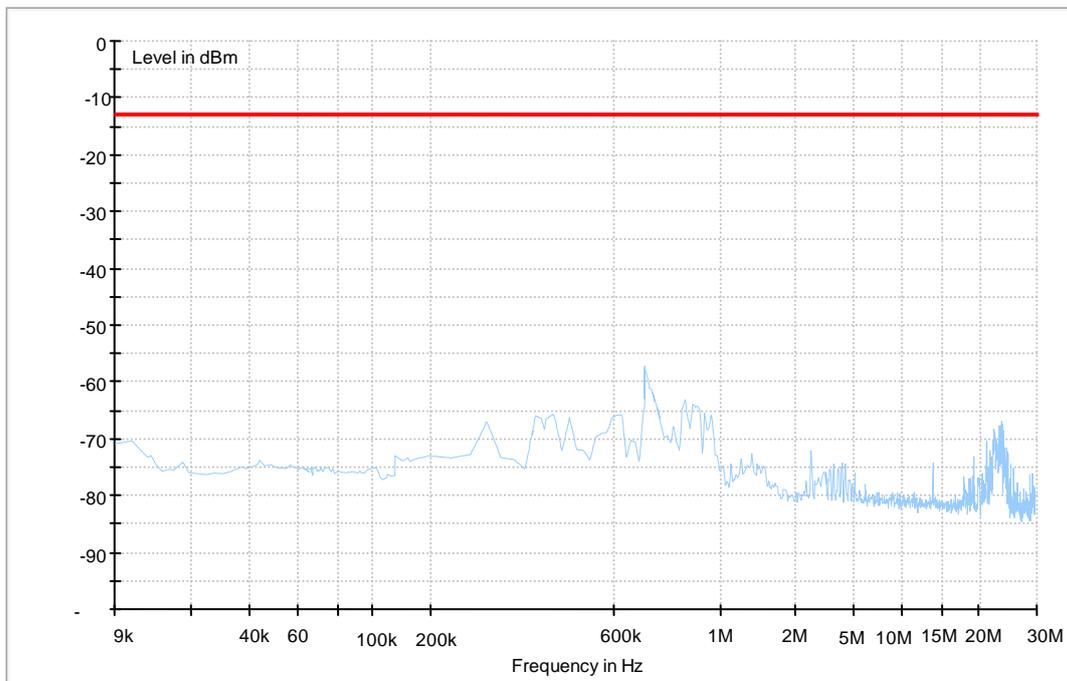

(30MHz~2GHz)

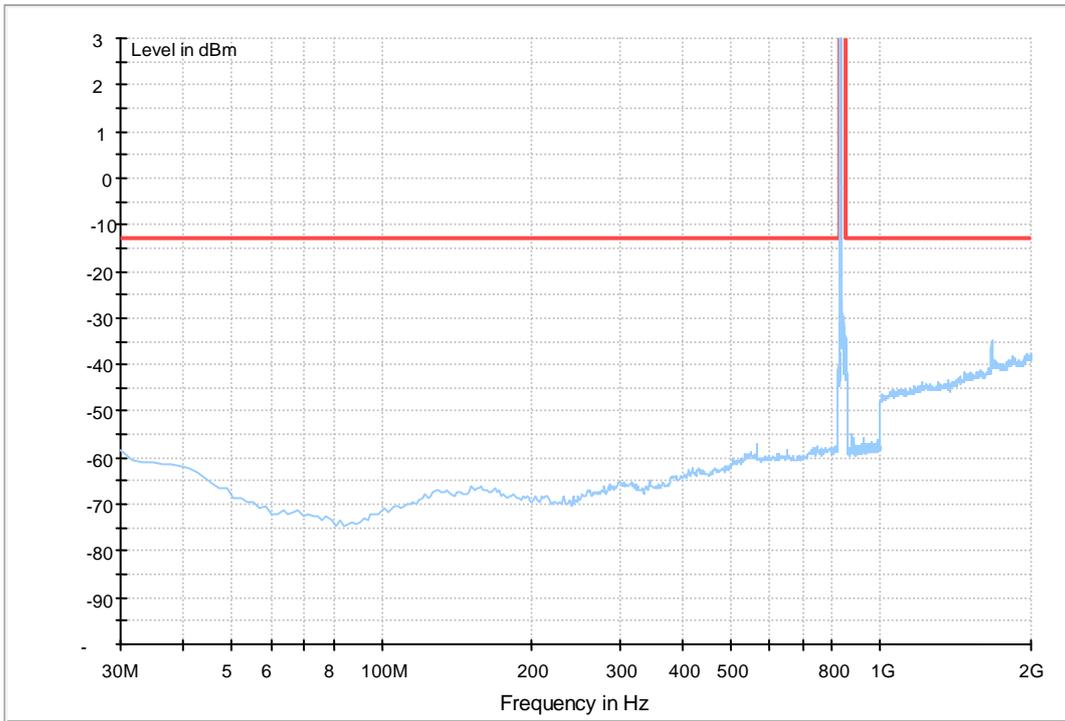

(2GHz~18GHz)

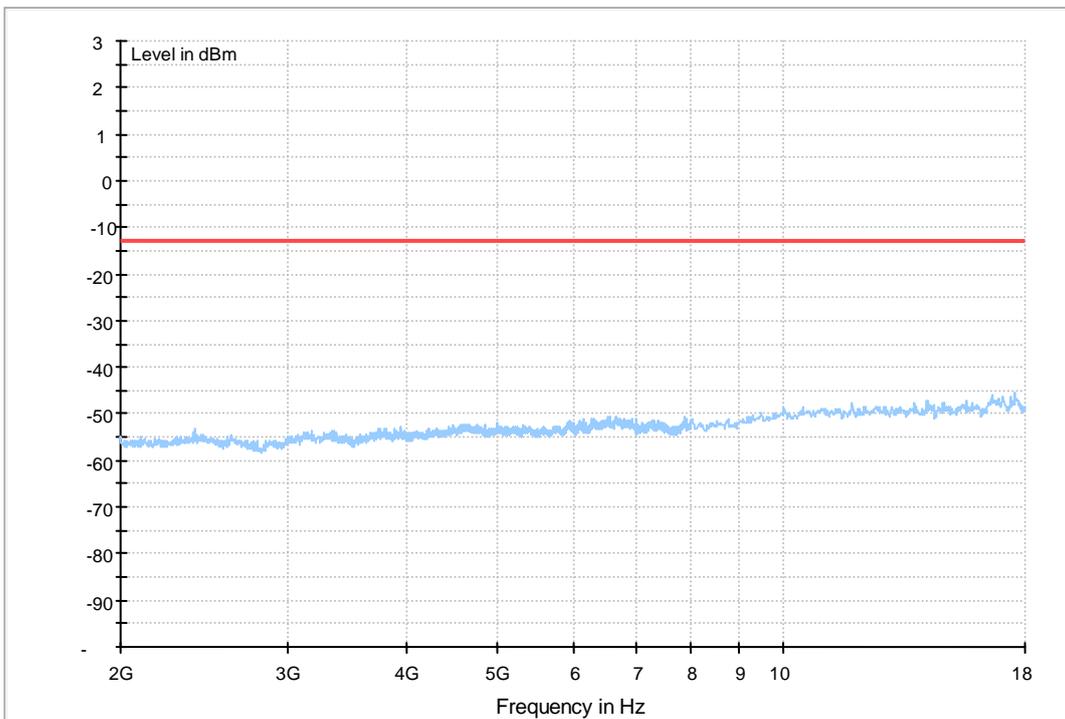



Appendix F

Photos of Radiated Spurious Emissions



Photos of Test Setup

1 Radiated Spurious Emissions



Radiated Spurious Emission (below 2GHz)



Radiated Spurious Emission (2GHz to18GHz)



FCC RF Test Report

Product Name: HSDPA Module

Model Number: MU509-g

Report No: SYBH(Z-RF)025092011-2002

FCC ID: QISMU509G

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Notice 2

Modification Information:

Modification Information

Modification Information	1	
	2	
	3	<i>Not Applicable!</i>
	4	
	5	
	6	
	7	



Contents

1	<u>Summary</u>	6
2	<u>Product Description</u>	7
2.1	PRODUCTION INFORMATION	7
2.2	MODIFICATION INFORMATION	7
3	<u>Test Site Description</u>	8
3.1	TESTING PERIOD.....	8
3.2	GENERAL SET UP DESCRIPTION	8
4	<u>Product Description</u>	9
4.1	TECHNICAL CHARACTERISTICS	9
4.2	EUT IDENTIFICATION LIST	11
5	<u>Main Test Instruments</u>	12
6	<u>Transmitter Measurements</u>	13
6.1	EFFECTIVE ISOTROPIC RADIATED POWER OF TRANSMITTER (EIRP)	13
6.2	CONDUCTED POWER OF TRANSMITTER	16
6.3	MODULATION CHARACTERISTICS	18
6.4	OCCUPIED BANDWIDTH.....	20
6.5	BAND EDGES COMPLIANCE	22
6.6	SPURIOUS EMISSION AT ANTENNA TERMINAL	24
6.7	RADIATED SPURIOUS EMISSIONS.....	26
6.8	FREQUENCY STABILITY	29
7	<u>System Measurement Uncertainty</u>	32
8	<u>Appendices</u>	33

1 Summary

The table below summarizes the measurements and results for the EUT. Detailed results and descriptions are shown in the following pages.

Table 1 Summary of results

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
2.1046	24.232	Effective Isotropic radiated power of Transmitter	PASS
2.1046	24.232	Conducted Power of Transmitter	PASS
2.1047	/	Modulation Characteristics	PASS
2.1049	/	Occupied Bandwidth	PASS
2.1051	24.238	Band Edges Compliance	PASS
2.1051	24.238	Spurious Emission at Antenna Terminal	PASS
2.1053	24.238	Radiated Spurious Emissions	PASS
2.1055	24.235	Frequency Stability	PASS

2 Product Description

2.1 Production Information

2.1.1 General Description

MU509-g HSDPA/WCDMA/EDGE/GPRS/GSM dual mode Wireless Module is subscriber equipment in the UMTS/GSM system. MU509-g implement such functions as RF signal receiving/transmitting, HSDPA/WCDMA and EDGE/GPRS/GSM protocol processing, data service etc. Externally it provides LGA interface.

2.1.2 Support function and Service

The EUT support the function and service as follows:

Service and Test mode List

Service Name	Characteristic	Corresponding Test Mode	Note
Data	Modulation: GMSK	TM1	GPRS/GSM
Data	Modulation: 8PSK	TM2	EDGE

Note: * The specified GPRS test conditions & settings are defined in 3GPP TS51.010 V5.4.0 and the EDGE test conditions & settings are defined in 3GPP TS51.010 V5.4.0.

2.2 Modification Information

For original equipment, following table is not application.

Modification Information

Model Number	Board/Module	Original Version	New Version	Modify Information
Not applicable				



3 Test Site Description

The test site of:

***Huawei Technologies Co. Ltd.
P.O. Box 518129
Huawei base, bantian,
Longgang District, Shenzhen, China***

3.1 Testing Period

The test have been performed during the period of

Sep.27, 2011 – Sep.28, 2011

3.2 General Set up Description

TM1: GSM/GPRS Mode with GMSK Modulation

TM2: EDGE Mode with 8PSK Modulation

4 Product Description

4.1 Technical Characteristics

4.1.1 Frequency Range

Frequency Range

Uplink band:	1850 to 1910 MHz
Downlink band:	1930 to 1990 MHz

4.1.2 Channel Spacing / Separation

Channel Spacing / Separation

	EDGE/GPRS/GSM
Channel raster	200k Hz
Channel spacing:	200k Hz

4.1.3 Type of Emission

Type of Emission

	EDGE	GPRS/GSM
Emission Designation:	300KG7W	300KGXW

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

4.1.4 Environmental Requirements

Environmental Requirements

Minimum temperature:	- 20 °C
Maximum temperature:	+ 70 °C
Relative Humidity:	5%-95%RH

4.1.5 Power Source

Power Source

AC voltage nominal:	~ 120 V
AC voltage range	~ 100 V to ~ 240 V
AC current maximal:	1A

4.1.6 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (9).

Please reference the document Tune-up Procedure in TCF.

4.1.7 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8).

The voltage and current in the final RF stage is:

Applied RF Module Voltages and Currents

Voltage:	☐ +3.8V
Current:	100mA According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8)



4.2 EUT Identification List

4.2.1 Board Information

Board Information		
HSDPA Module		
MU509-g		
Board and Module		
Hardware Version	Serial Number	Software Version
MD1MU509M	3DA6RB1183000147	11.813.03.01.00

4.2.2 FCC Identification

Grantee Code: QIS
Product Code: MU509-g
FCC Identification: QISMU509G

5 Main Test Instruments

Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sep.27,2012
Universal Radio Communication Tester	R&S	CMU200	105822	Oct.24,2011
Wireless Communication Test set	Agilent	N4010A	MY49081592	Dec.14,2011
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug.04,2012
Signal Analyzer	R&S	FSQ31	200021	Sep.27,2012
Temperature Chamber	WEISS	WKL64	24600294	Jan.25,2012
Signal generator	Agilent	E8257D	MY49281095	Jul.09,2012
Vector Signal Generator	R&S	SMU200A	104162	Sep.07,2012
Test receiver	R&S	ESU26	36090302083	Jun.24,2012
EMI Test receiver	R&S	FSQ43	100048	Jun.23,2012
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	919/1009	Dec.13,2011
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	Dec.13,2011
Horn Antenna	R & S	HF906	359287/005	May.07, 2012
Horn Antenna	R & S	HF906	359287/006	Apr.27, 2012
Horn Antenna	R & S	HF906	100684	Jun.28,2012
Broadband Antenna	SCHAFFNER	CBL 6112B	2536	Sep.21, 2012
Broadband Antenna	SCHAFFNER	CBL 6112B	2941	Jun.20, 2012
Broadband Antenna	SCHAFFNER	VULB 9163	9163-357	Sep.28,2012
Horn Antenna	ETS-LINDGREN	3160	60008	Sep.20,2012
Horn Antenna	ETS-LINDGREN	3160	91989	Sep.28,2012

6 Transmitter Measurements

6.1 Effective Isotropic radiated power of Transmitter (EIRP)

6.1.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1/TM2 at frequency B, M, T

6.1.2 Test Specifications and Limits

6.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 24 subpart E

6.1.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

6.1.2.3 Limits

Compliance with part 24.232, mobile/portable stations are limited to 2 watts EIRP peak power.
 $W(\text{dBm}) = 10 \cdot \log(W_{\text{InmW}})$.

Limits


Maximum Output Power (Watts)	< 2 Watts
Maximum Output Power (dBm)	< 33 dBm

6.1.3 Test Method and Setup

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the wireless communication tester CMU200 via the air interface. The band is set as PCS.
- (b) Test the Radiated maximum output power by the CMU200 received from test antenna.
- (c) Use substitution method to verify the maximum output power. The EUT is substituted by a horn antenna. The horn is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on CMU200, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

Test setup

Step 1: Pre-test

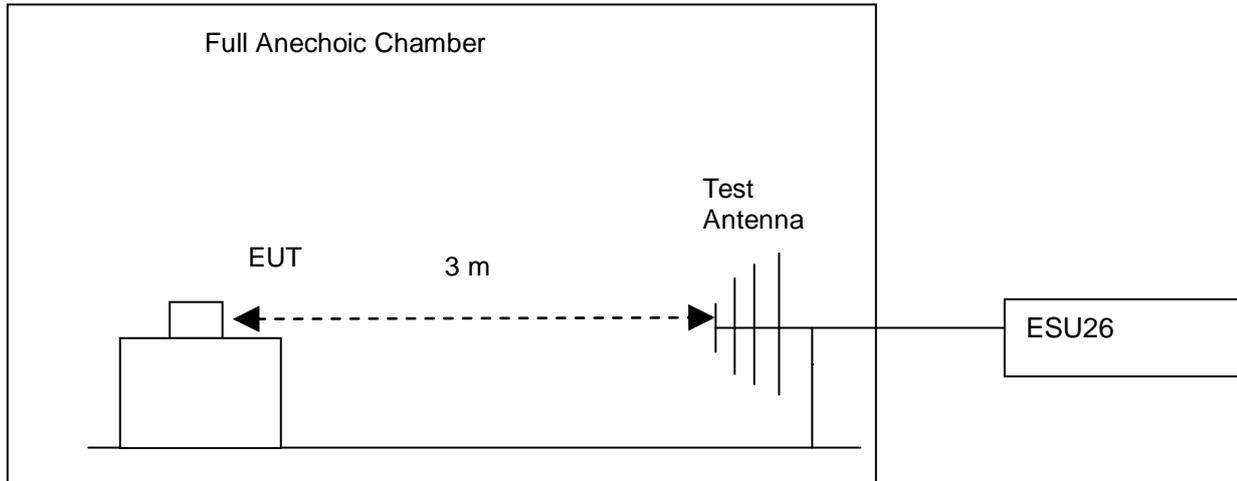

Step 2: Substitution method to verify the maximum EIRP

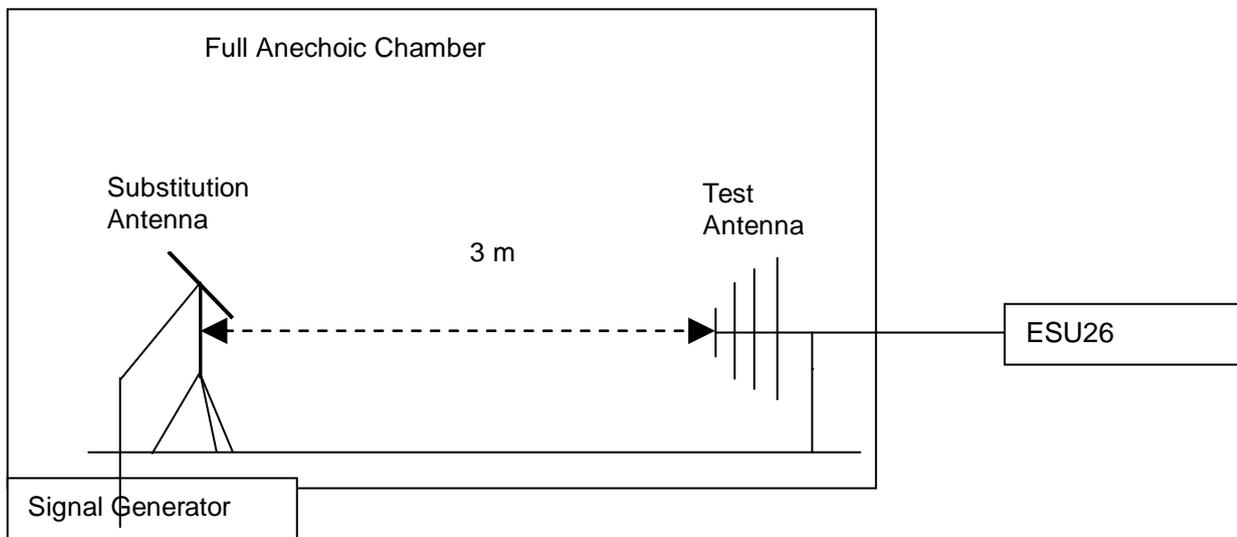


Figure 1. Test Set-up

NOTE: Effective Isotropic radiated power (EIRP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave horn antennas.

There is a constant difference of 2.15 dB between EIRP and ERP.

$EIRP (dBm) = ERP (dBm) + 2.15$ (ITU-R Recommendation SM.329-10).

EIRP was measured using 1 host.

BenQ Joy book S72

6.1.4 Measurement Results

6.1.4.1 Pre-test Results

Measurement Results

TEST CONDITIONS	RF Output Power (EIRP)					
	Channel 512(B)		Channel 661(M)		Channel 810(T)	
	1850.2MHz		1880.0MHz		1909.8MHz	
	dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (3.8V)	Measured	Limit	Measured	Limit	Measured	Limit
TM1	32.85	33	32.87	33	32.56	33
TM2	29.54	33	29.51	33	29.27	33

6.1.4.2 Substitution Results

Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBi]	Cable Loss [dB]	Substitution Level (EIRP) [dBm]	FCC limit [dBm]	Result
TM1	1850.2	32.85	Horn Ant.	29.36	4.5	1	32.86	33	Pass
TM1	1880.0	32.87	Horn Ant.	29.33	4.5	1	32.83	33	Pass
TM1	1909.8	32.56	Horn Ant.	28.85	4.8	1	32.65	33	Pass
TM2	1850.2	29.54	Horn Ant.	26.02	4.5	1	29.52	33	Pass
TM2	1880.0	29.51	Horn Ant.	26.05	4.5	1	29.55	33	Pass
TM2	1909.8	29.27	Horn Ant.	25.56	4.8	1	29.36	33	Pass

Note: a, For get the EIRP (Efficient Isotropic Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{EIRP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBi]}$$

NOTE: SGP- Signal Generator Level

b, Measurement the EIRP with RMS detector.

c, RBW=10kHz, VBW=300kHz, and integrated by the instrument to 250kHz for TM1 and TM2.

6.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.2 Conducted Power of Transmitter

6.2.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2 at frequency B, M, T

6.2.2 Test Specifications and Limits

6.2.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 24 subpart E

6.2.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

6.2.2.3 Limits

Compliance with part 24.232, in no any case may the peak power of a mobile station transmitter exceed 2 W. The calculated longitude EIRP by following formula:

$$EIRP(dBm) = 10 \cdot \log(EIRP_{in\ mW}).$$

And for conducted power, we can use Antenna Gain to calculate the limit. So the conducted power:

$$P_{cod.}(dBm) = EIRP(dBm) - Gain(dBi).$$

and $Gain(dBi) = Gain(dBd) + 2.15dB$

Limits

Maximum Output Power (Watts)	< 2 Watts (33 dBm)
Antenna Gain(dBi):	3.0
Antenna Gain(dBd):	0.85
Maximum Conducted Output Power (dBm)	< 30

6.2.3 Test Method and Setup

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, Conducted maximum power shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the wireless communication tester CMU200 via the antenna connector. The band class is set as PCS.

(b) Test the Conducted maximum output power by the CMU200.

Test setup

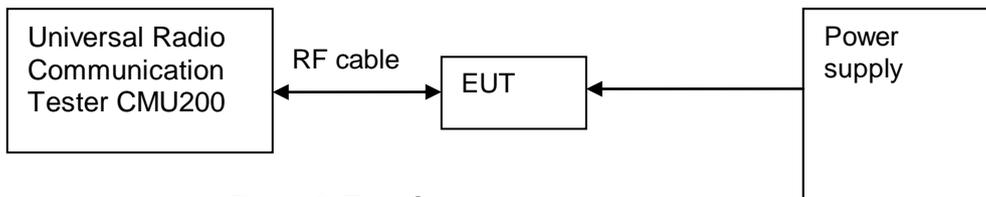


Figure 2. Test Set-up

6.2.4 Measurement Results

Measurement Results

TEST CONDITIONS	RF Output Power (Conducted)					
	Channel 512(B)		Channel 661(M)		Channel 810(T)	
	1850.2MHz		1880.0MHz		1909.8MHz	
	dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (3.8V)	Measured	Limit	Measured	Limit	Measured	Limit
TM1	29.85	30	29.87	30	29.56	30
TM2	26.54	30	26.51	30	26.27	30

Note: Measurement the Conducted output power with RMS detector.

6.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.3 Modulation Characteristics

6.3.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2 at frequency M

6.3.2 Test Specifications and Limits

6.3.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 24 subpart E

6.3.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

6.3.2.3 Limits

No specific modulation characteristics requirement limits in part 2.1047 and part 24 subpart E.

Limits

Limits	Not applicable
--------	----------------

6.3.3 Test Method and Setup

Connect the EUT to Universal Radio Communication Tester CMU200 via the antenna connector. The frequency band is set as PCS; the EUT's output is matched with 50 Ω load, test method was according to 3GPP TS 51.010 and 3GPP TS 34.121. The waveform quality and constellation of the EUT was tested.

Test setup

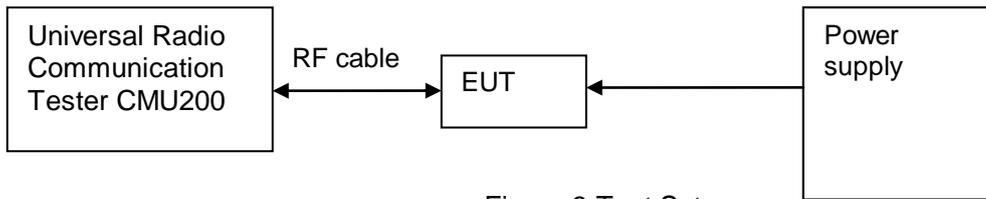


Figure 3. Test Set-up

6.3.4 Measurement Results

Measurement Results

TEST CONDITIONS		Modulation Characteristic	
		Channel 661(M)	
		1880.0MHz	
		Measured	
		TM1	TM2
T _{nom} (25 °C)	V _{nom} (3.8V)	Refer to Appendix A	Refer to Appendix A

6.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix A.

6.4 Occupied Bandwidth

6.4.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2 at frequency B, M, T

6.4.2 Test Specifications and Limits

6.4.2.1 Specification

CFR 47 (FCC) part 2.1049 and part 24 subpart E

6.4.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

6.4.2.3 Limits

No specific occupied bandwidth requirement in part 24 subpart E, but the occupied bandwidth was defined in part 2.1049: the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Limits

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

6.4.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector. The band class is set as PCS; The EUT was controlled to transmit maximum power. Measure and record the occupied bandwidth of the EUT by the R&S FSQ31.

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

Refer to 47CFR part2.1049 section (g)&(h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The

level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

For TM1/TM2 following RBW and VBW are employed:
Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)
Video bandwidth (VBW): 10 kHz

Test Set-up

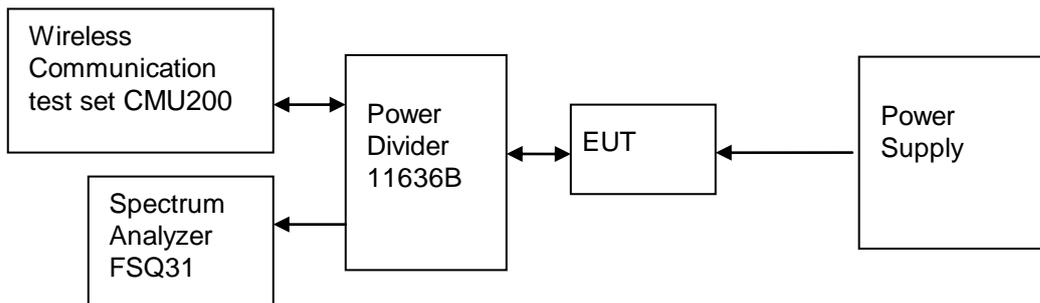


Figure 4. Test Set-up

6.4.4 Measurement Results

Measurement Results

TEST CONDITIONS		Occupied Bandwidth					
		Channel 512(B)		Channel 661(M)		Channel 810(T)	
Center Frequency		1850.2MHz		1880.0MHz		1909.8MHz	
		Measured		Measured		Measured	
		(kHz)		(kHz)		(kHz)	
		TM1	TM2	TM1	TM2	TM1	TM2
T _{nom} (25 °C)/ V _{nom} (3.8V)	99%	243.59	243.59	245.19	243.59	250.00	243.59

6.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix B.

6.5 Band Edges Compliance

6.5.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1/TM2 at frequency B, T

6.5.2 Test Specifications and Limits

6.5.2.1 Specification

CFR 47 (FCC) part 2.1051 and Part24 Subpart E

6.5.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

6.5.2.3 Limits

Compliance with part 24.238, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P(W)$. (Whereas P is the rated power of the EUT).

Limits

	TM1	TM2
Rated Power:	30 dBm	26 dBm
Required attenuation:	$43 + 10 \log(1) = 43$, 30 dBm - 43 dB	$43 + 10 \log(0.4) = 39$, 26 dBm - 39 dB
Absolute level	- 13 dBm	- 13 dBm

6.5.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the band class is set as PCS. The EUT was controlled to transmit maximum power. Measure and record band edges compliance of the EUT by the R&S FSQ31.

For TM1/TM2 following RBW and VBW are employed:

Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)

Video bandwidth (VBW): 10 kHz

Test Set-up

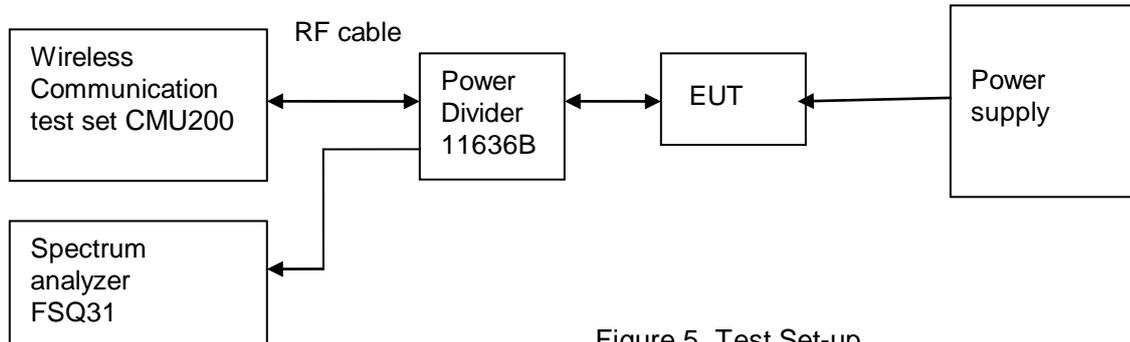


Figure 5. Test Set-up

6.5.4 Measurement Results

Measurement Results outside Band Edges-- Single Carrier

Band	Frequency of Band edges [MHz]	Channel Number	Test Mode	Spurious Level measured [dBm]	FCC limit	Result
$T_{nom} (25\text{ }^{\circ}\text{C}), V_{nom} (3.8\text{V})$						
PCS	1850.2	512	TM1	<-13(See appendix C)	- 13 dBm	Pass
	1909.8	810	TM1	<-13(See appendix C)	- 13 dBm	Pass
	1850.2	512	TM2	<-13(See appendix C)	- 13 dBm	Pass
	1909.8	810	TM2	<-13(See appendix C)	- 13 dBm	Pass

6.5.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix C.

6.6 Spurious Emission at Antenna Terminal

6.6.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1/TM2 at frequency B, M, T

6.6.2 Test Specifications and Limits

6.6.2.1 Specification

CFR 47 (FCC) part 2.1051 and Part24 Subpart E

6.6.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

6.6.2.3 Limits

Compliance with part 24.238, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Limits

	TM1	TM2
Rated Power:	30 dBm	26 dBm
Required attenuation:	$43 + 10 \log(1) = 43$, 30 dBm - 43 dB	$43 + 10 \log(0.4) = 39$, 26 dBm - 39 dB
Absolute level	- 13 dBm	- 13 dBm

6.6.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the band class is set as PCS. The EUT was controlled to transmit maximum power. Measure and record the Conducted Spurious Emission of the EUT by the R&S FSQ31.

According to part 24.238, the defined measurement bandwidth as following:

24.238 (b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
Measurement bandwidth (RBW) for 150 kHz up to 30MHz: 10 kHz;
Measurement bandwidth (RBW) for 30 MHz up to 20GHz: 1MHz;

Test Set-up

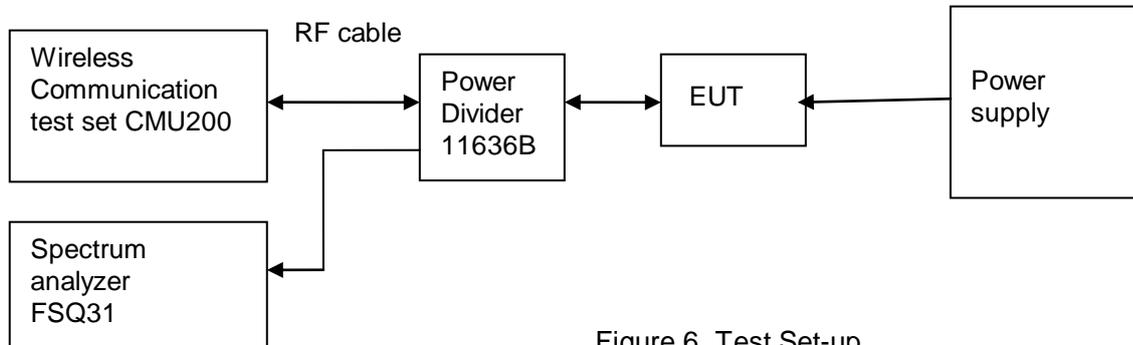


Figure 6. Test Set-up

6.6.4 Measurement Results

Measurement Results

Channel Number	Test Mode	Test Range (Frequency)	Output Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel 512(B)	TM1	9 kHz~20GHz	30	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz~20GHz	26	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 661(M)	TM1	9 kHz~20GHz	30	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz~20GHz	26	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 810(T)	TM1	9 kHz~20GHz	30	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz~20GHz	26	<- 13 dBm (See appendix D)	- 13 dBm	Pass

6.6.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix D.

6.7 Radiated Spurious Emissions

6.7.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1/TM2 at frequency M

6.7.2 Test Specifications and Limits

6.7.2.1 Specification

CFR 47 (FCC) part 2.1053 and part 24.238

6.7.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

6.7.2.3 Limits

Compliance with part 24.238, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Limits

Absolute level	- 13 dBm
----------------	----------

6.7.3 Test Method and Setup

A test site fulfilling the requirements of ITU-R Recommendation SM329-11 was used. The EUT was placed on a non-conducting support in the anechoic chamber and was operated from a power source via an RF filter to avoid radiation from the power leads.

According to part 24.238, the defined measurement bandwidth as following:

24.238(b) Measurement procedure: Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.


Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;
Measurement bandwidth (RBW) for 30MHz up to 26.5GHz: 1MHz;

Test Set-up

Step 1:


For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the BTS simulator via the air interface.

Test the Radiated maximum output power by the Test Receiver from test antenna.

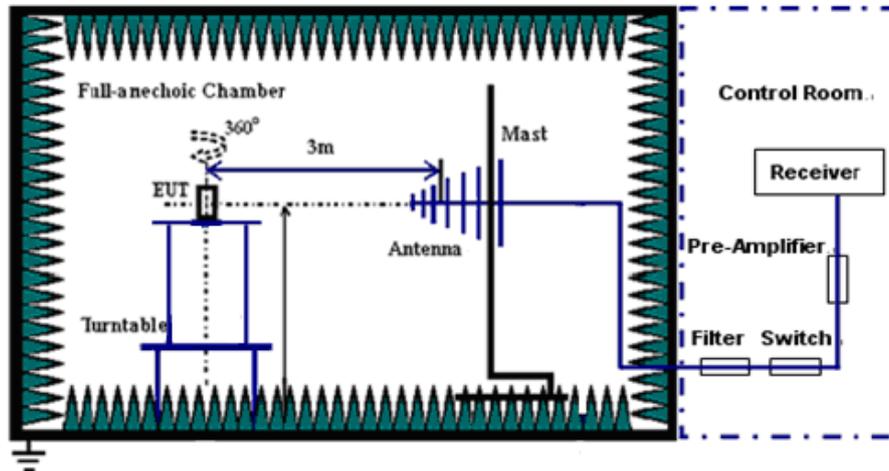

Step 2:

Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step1 on Test Receiver, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

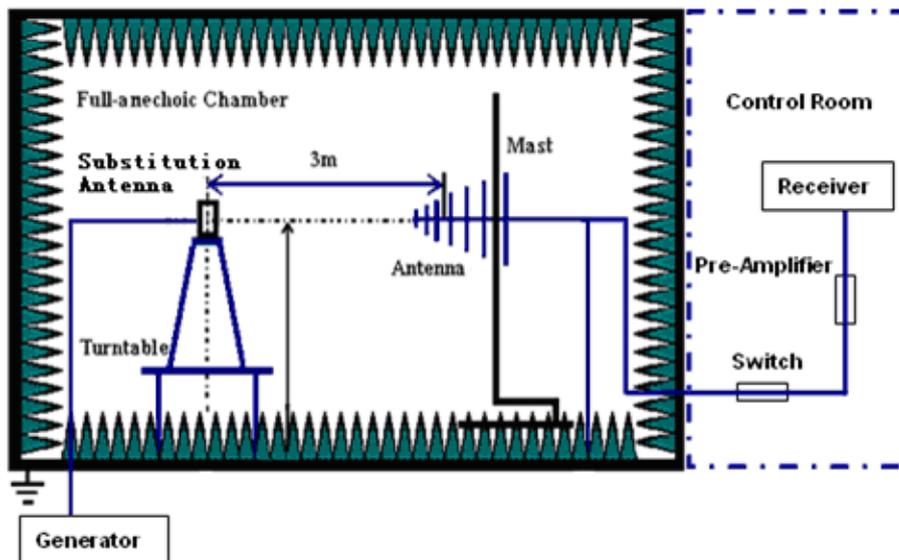

Test should be performed in normal voltage condition.

No peak found in pre- test. All frequency points' margin is bigger than 20dB, so the substitution method isn't used.

Calculation Sample:

Substitution Results

Freq. [MHz]	Measurement Value [dBm]	Substitution Antenna Type	Gain [dBd]	Cable Loss [dB]	Signal Generator Level [dBm]	Substitution Level [dBm]	FCC limit [dBm]	Result

Note: For get the E.R.P. (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{E.R.P. [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

NOTE: SGP- Signal Generator Level

6.7.4 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix_E

6.8 Frequency Stability

6.8.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	See below
Relative humidity:	55 %
Test Configurations:	TM1/TM2 at frequency M

6.8.2 Test Specifications and Limits

6.8.2.1 Specification

CFR 47 (FCC) part 2.1055 and Part24 Subpart E

6.8.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

6.8.2.3 Limits

No specific frequency stability requirement in part 2.1055 and part 24.235.

6.8.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30 ° to +50 ° centigrade for all equipment except that specified in subparagraphs (2) and (3) of paragraph 2.1055

(a) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(b) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.
- (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage

and at each extreme also shall be shown.

(c) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

The EUT can only work in such extreme temperature -20 to +70 °C, so here the EUT is tested -20°C in the lowest temperature.

Test Set up

Connect the EUT to the Wireless Communication test set CMU200 via the connector. Then measure the frequency error by the Wireless Communication test set CMU200. The EUT's output is matched with a 50 Ω load.

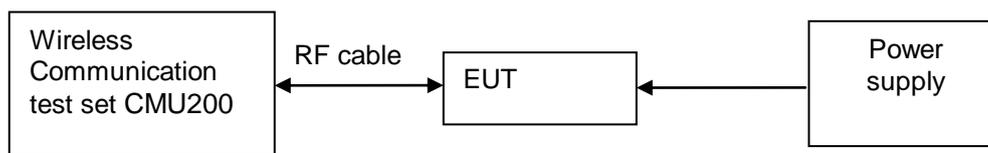


Figure 7. Test Set up

6.8.4 Measurement Results

6.8.4.1 Measurement Results vs. Variation of Temperature

- **TM1,3.8V DC Channel No.661(1880.0MHz)**

Measurement Results vs. Variation of Temperature—TM1

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-20 °C	1880.0	9	Pass
-10 °C	1880.0	-11	Pass
0 °C	1880.0	5	Pass
+10 °C	1880.0	12	Pass
+20 °C	1880.0	17	Pass
+30 °C	1880.0	-10	Pass
+40 °C	1880.0	11	Pass
+50 °C	1880.0	5	Pass

- **TM2, 3.8V DC Channel No.661(1880.0MHz)**

Measurement Results vs. Variation of Temperature—TM2

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-20 °C	1880.0	-12	Pass
-10 °C	1880.0	-5	Pass
0 °C	1880.0	-11	Pass
+10 °C	1880.0	-12	Pass
+20 °C	1880.0	-16	Pass
+30 °C	1880.0	-3	Pass
+40 °C	1880.0	-11	Pass
+50 °C	1880.0	-12	Pass

6.8.4.2 Measurement Results vs. Variation of Voltage

- **TM1, 25 °C ,Channel No. 661(1880.0MHz)**

Measurement Results vs. Variation of Voltage—TM1

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+4.2V	1880.0	-5	Pass
+3.8V	1880.0	-2	Pass
+3.3V	1880.0	-12	Pass

- **TM2, 25 °C ,Channel No. 661(1880.0MHz)**

Measurement Results vs. Variation of Voltage—TM2

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+4.2V	1880.0	9	Pass
+3.8V	1880.0	-11	Pass
+3.3V	1880.0	-8	Pass

6.8.5 Conclusion

The equipment **PASSED** the requirement of this clause.

7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

System Measurement Uncertainty

Items		Extended Uncertainty
Effective Isotropic radiated power of Transmitter	EIRP (dBm)	U=3dB; k=2
Band Width	Magnitude (%)	U=0.2%; k=2
Band Edge Compliance	Disturbance Power(dBm)	U=2.0dB; k=2
Conducted Spurious Emission at Antenna Terminal	Disturbance Power(dBm)	U=2.0dB; k=2
Frequency Stability	Frequency Accuracy(ppm)	U=0.21ppm; k=2



8 Appendices

Appendix A	Measurement Results Modulation Characteristics
Appendix B	Measurement Results Occupied Bandwidth
Appendix C	Measurement Results Band Edges
Appendix D	Measurement Results Spurious Emission at Antenna Terminal
Appendix E	Measurement Results Radiated Spurious Emissions
Appendix F	Photos of Radiated Spurious Emissions




Appendix A

Modulation Characteristics According to FCC Part 2.1047 & Part24 Subpart E




TM1:GPRS/GSM Channel 661

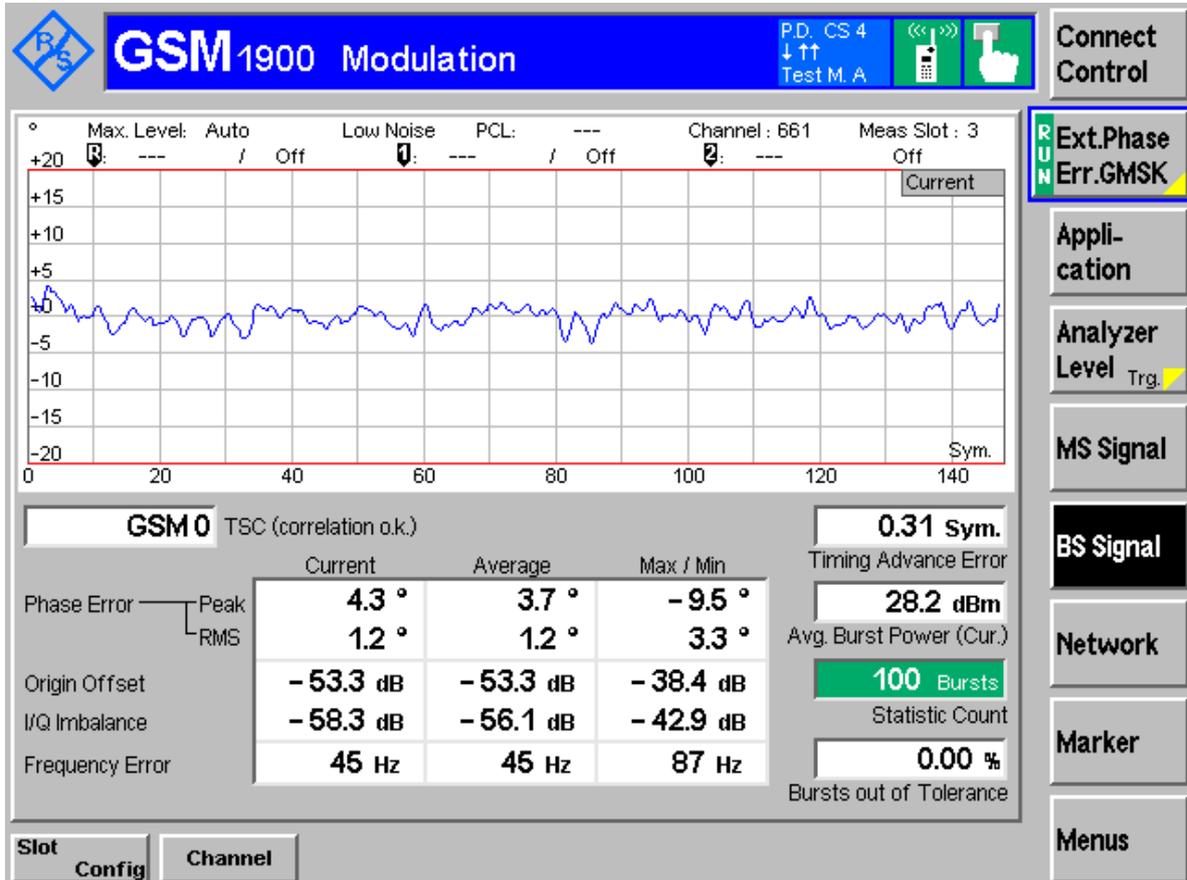



TM2:EDGE Channel 661

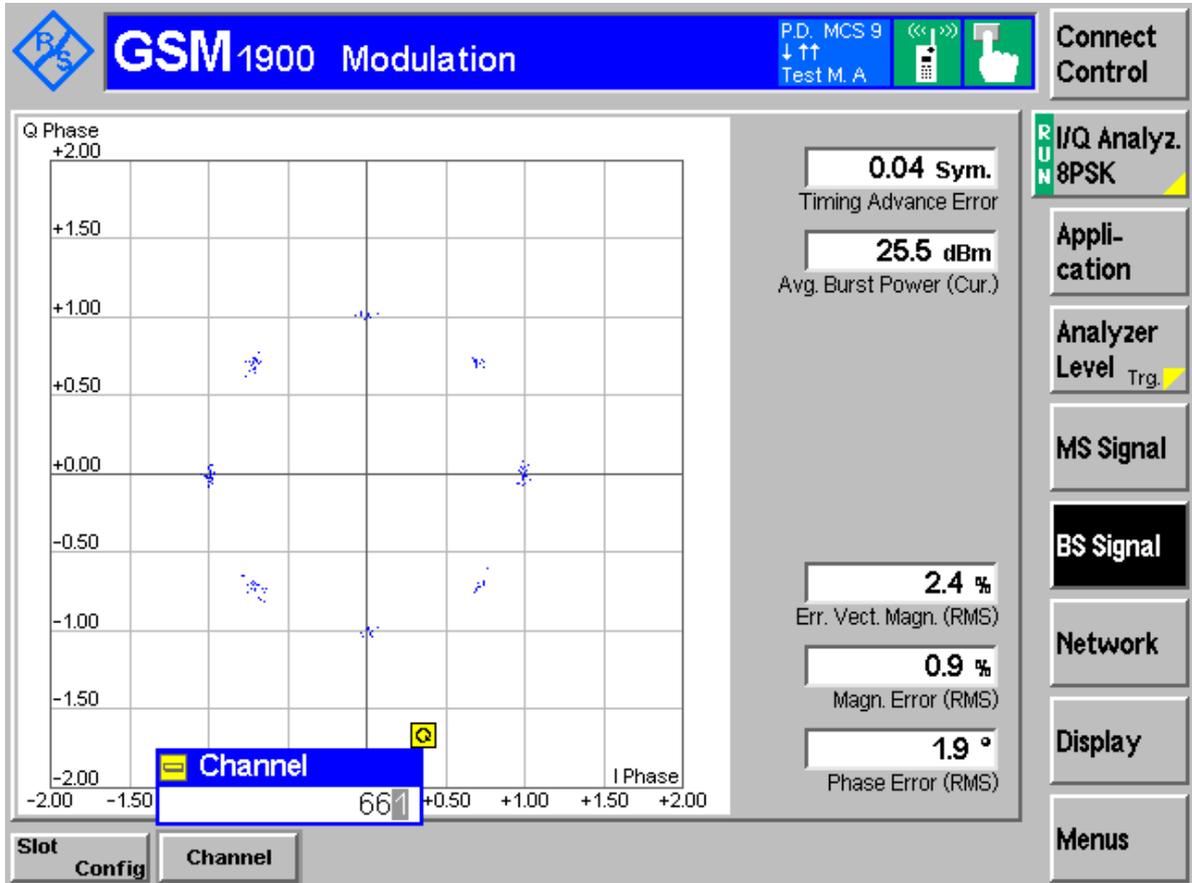




Appendix B

Occupied Bandwidth

According to FCC Part 2.1049 & Part 24 Subpart E




TM2:EDGE Channel 661

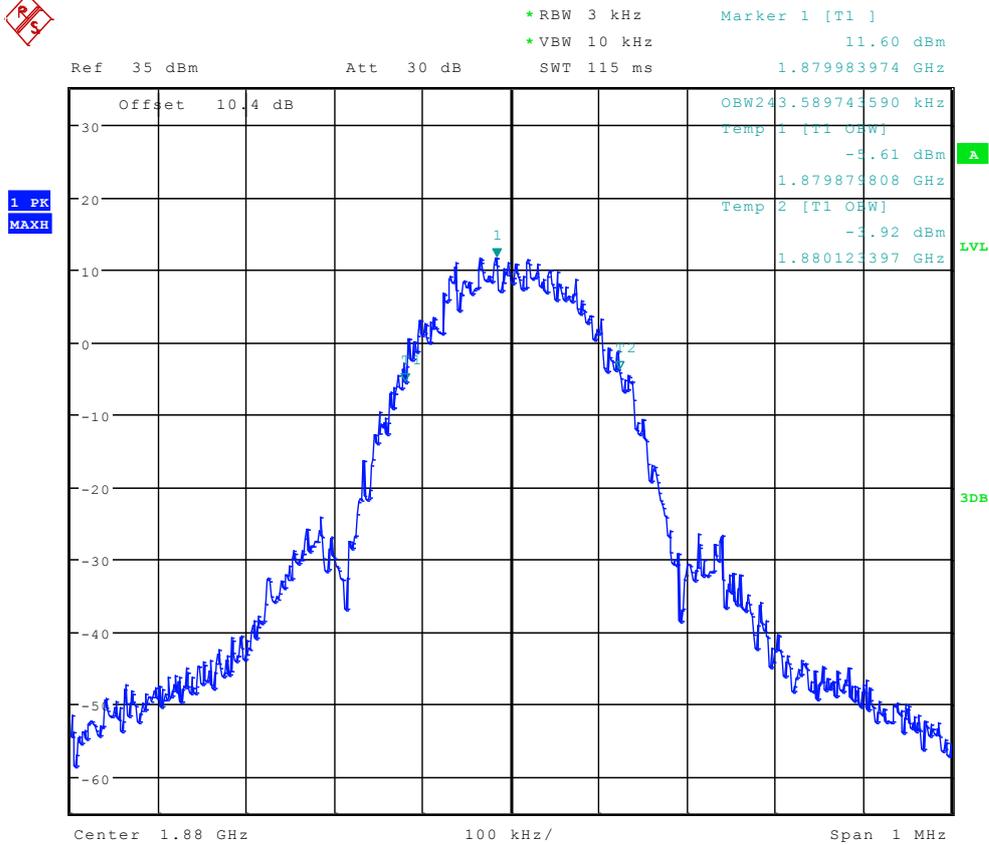

Date: 28.SEP.2011 00:09:05



TM1:GPRS/GSM Channel 810

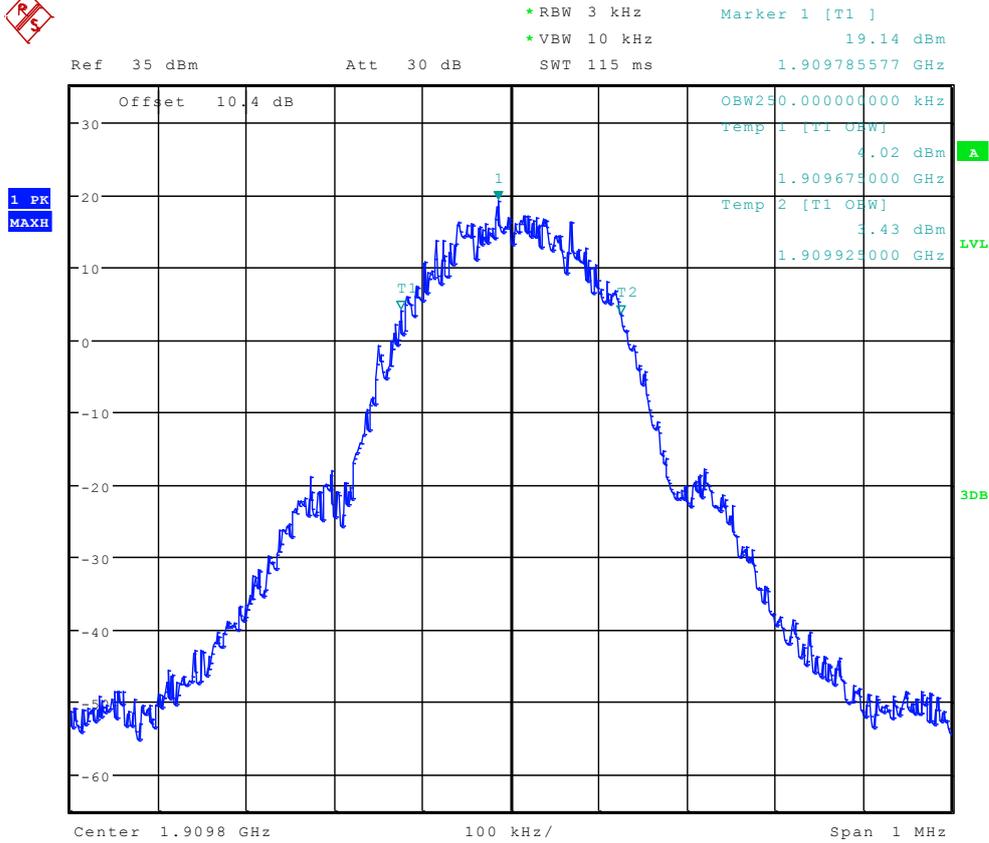

Date: 28.SEP.2011 00:03:36



Appendix C


Band Edges Compliance According to FCC Part 2.1051 & 24.238



TM1:GPRS/GSM

Left Edge


Channel 512

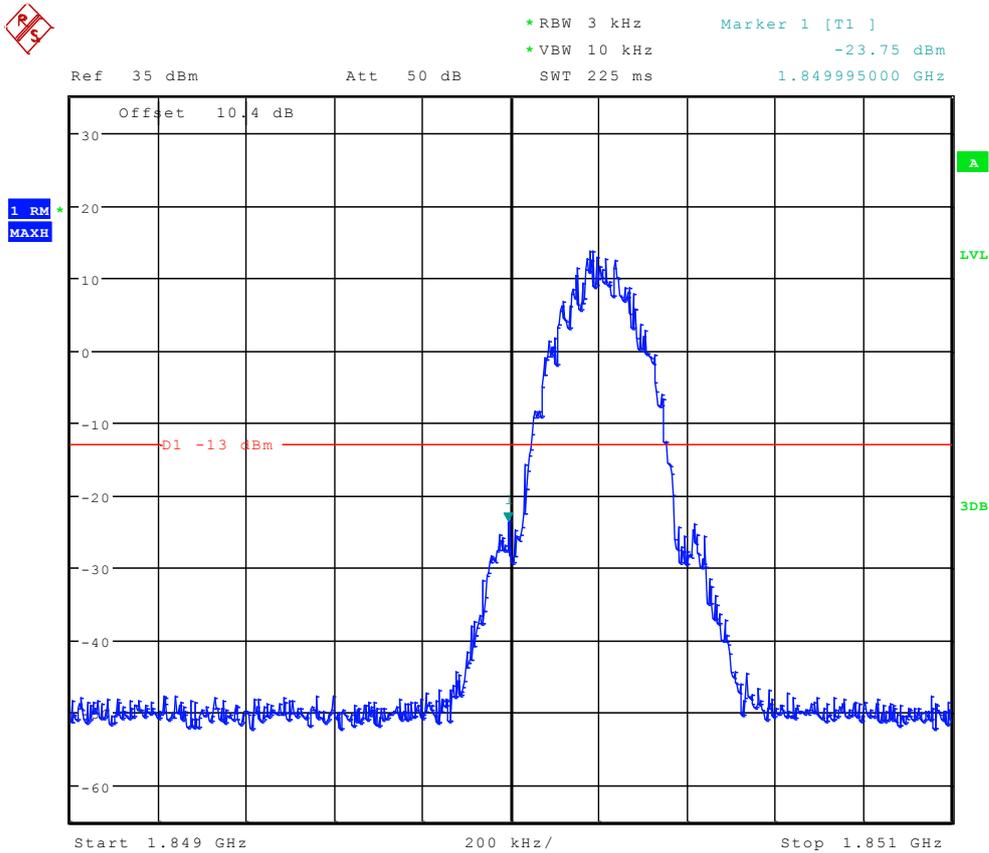

Date: 28.SEP.2011 00:06:03




Right Edge Channel 810

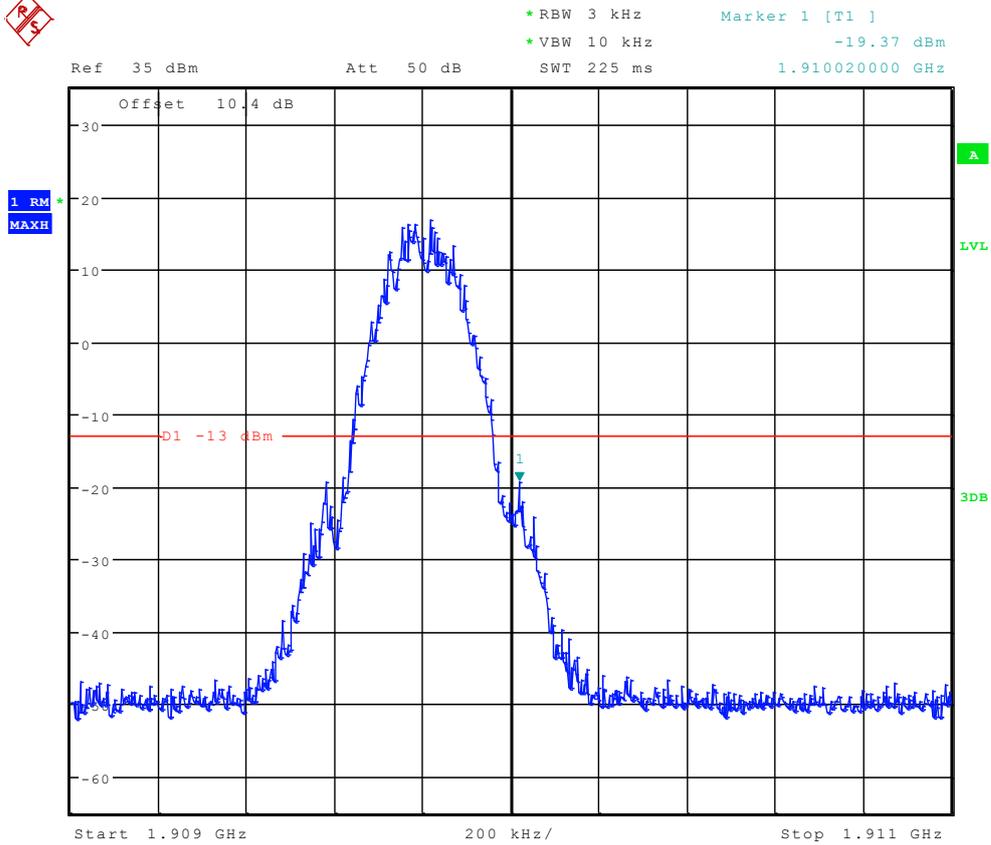

Date: 28.SEP.2011 00:06:20




EDGE Left Edge Channel 512

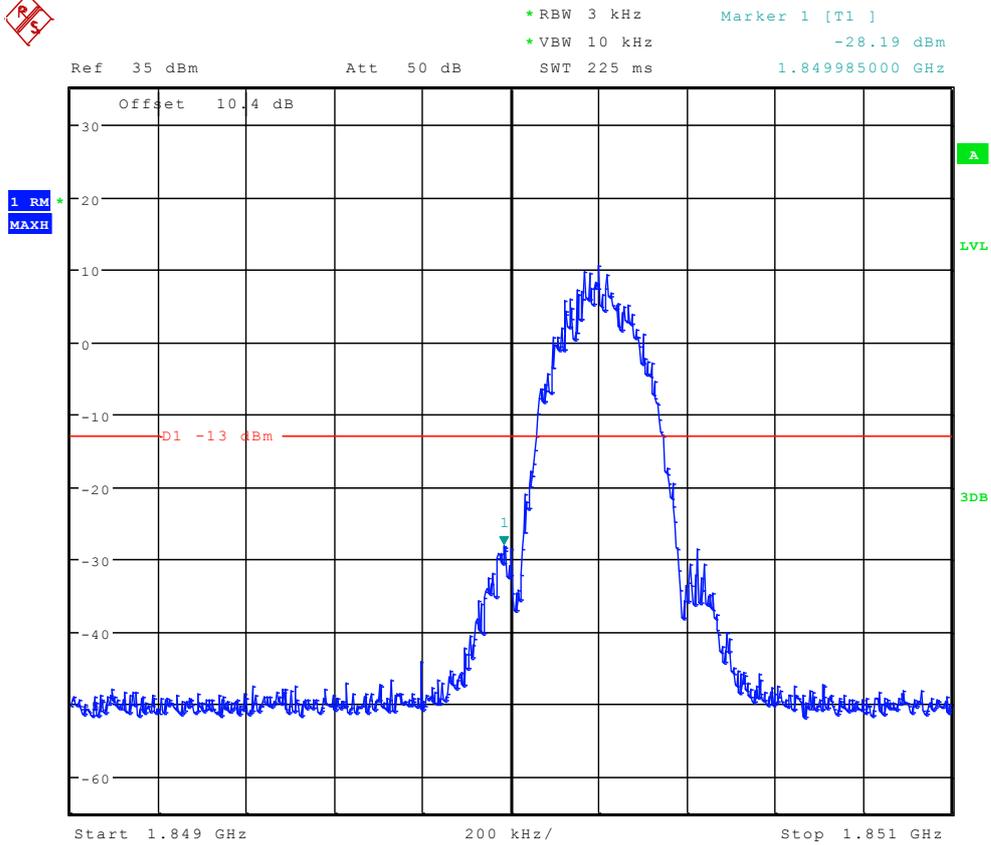

Date: 28.SEP.2011 00:08:23



Right Edge Channel 810

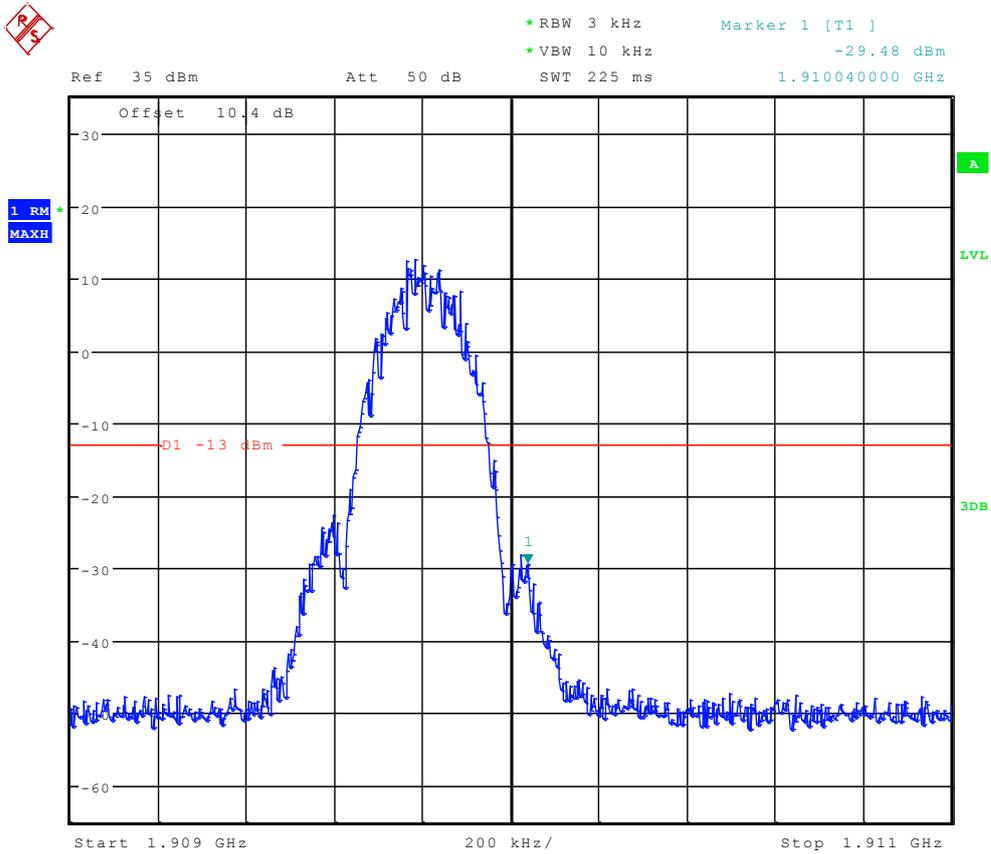

Date: 28.SEP.2011 00:08:37



Appendix D


Spurious Emission at Antenna Terminal

According to FCC Part 2.1051 & 24.238




TM1:GPRS/GSM


Channel 512

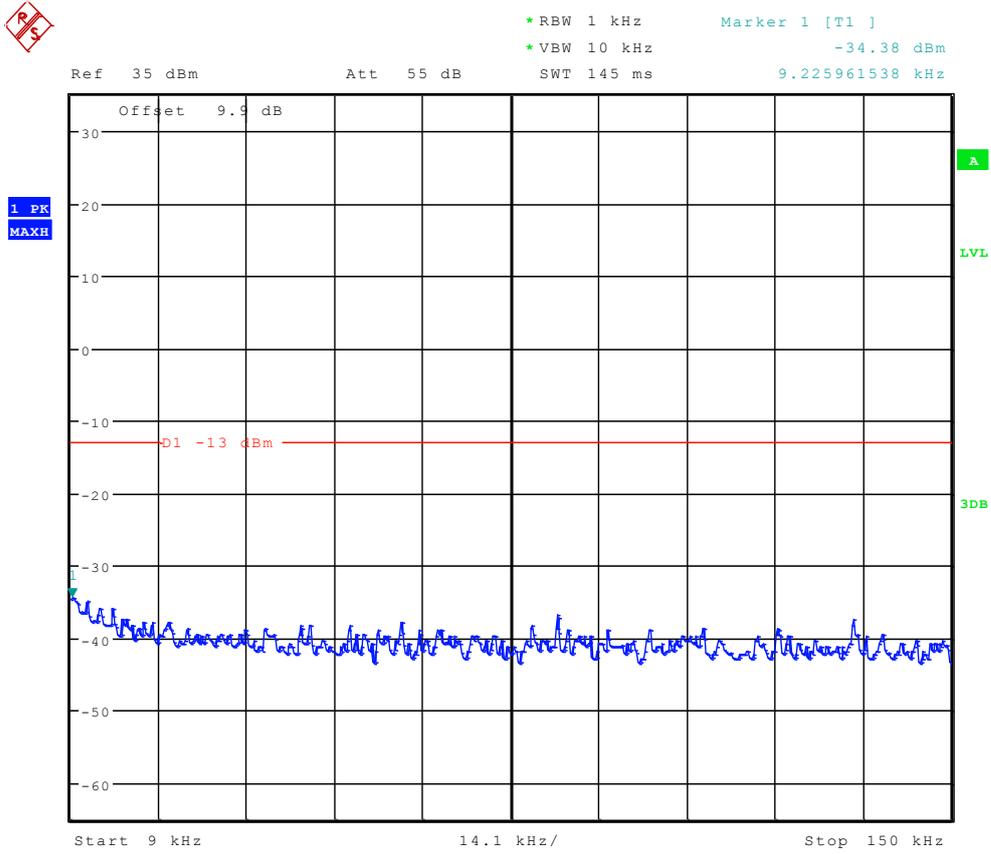

Date: 28.SEP.2011 00:03:51

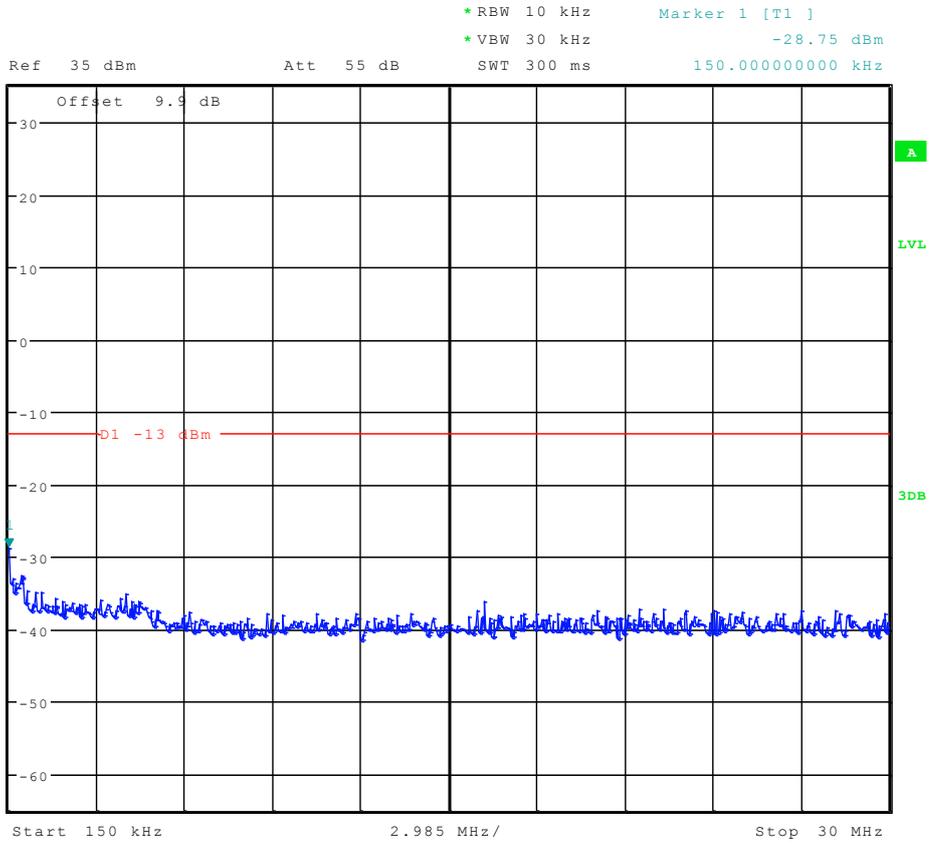


Date: 28.SEP.2011 00:04:35

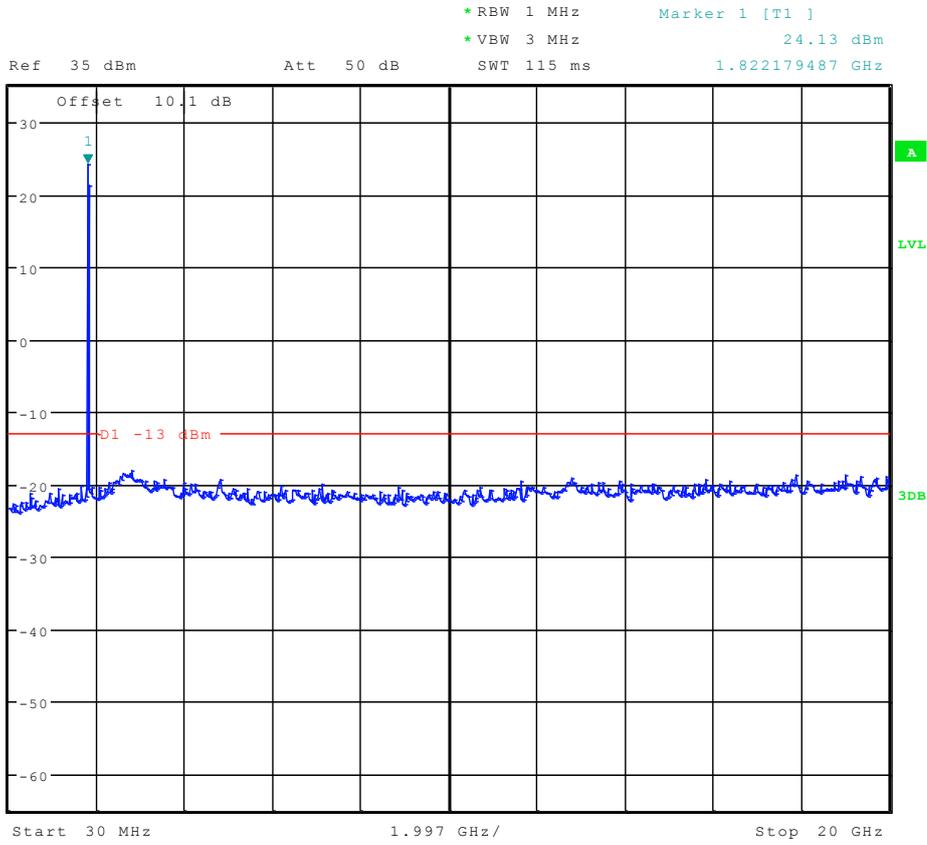

Date: 28.SEP.2011 00:05:19




Channel 661

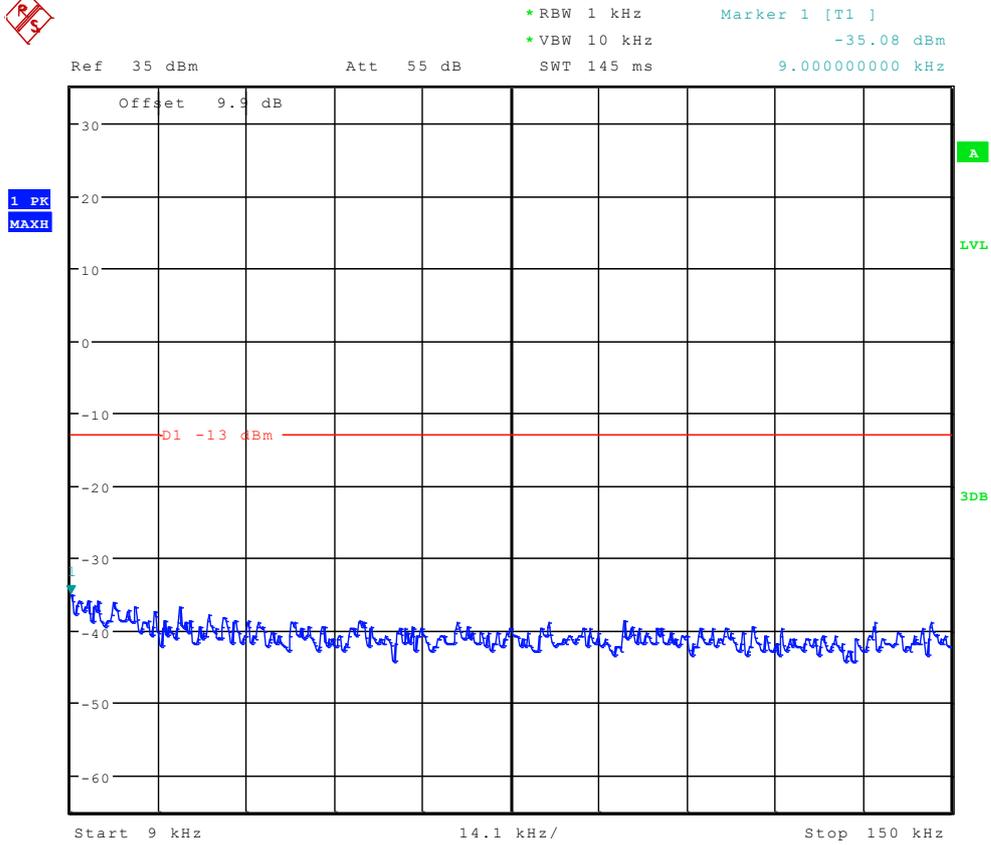


Date: 28.SEP.2011 00:04:06



Ref 35 dBm Att 55 dB SWT 300 ms 197.836538462 kHz
*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -29.11 dBm

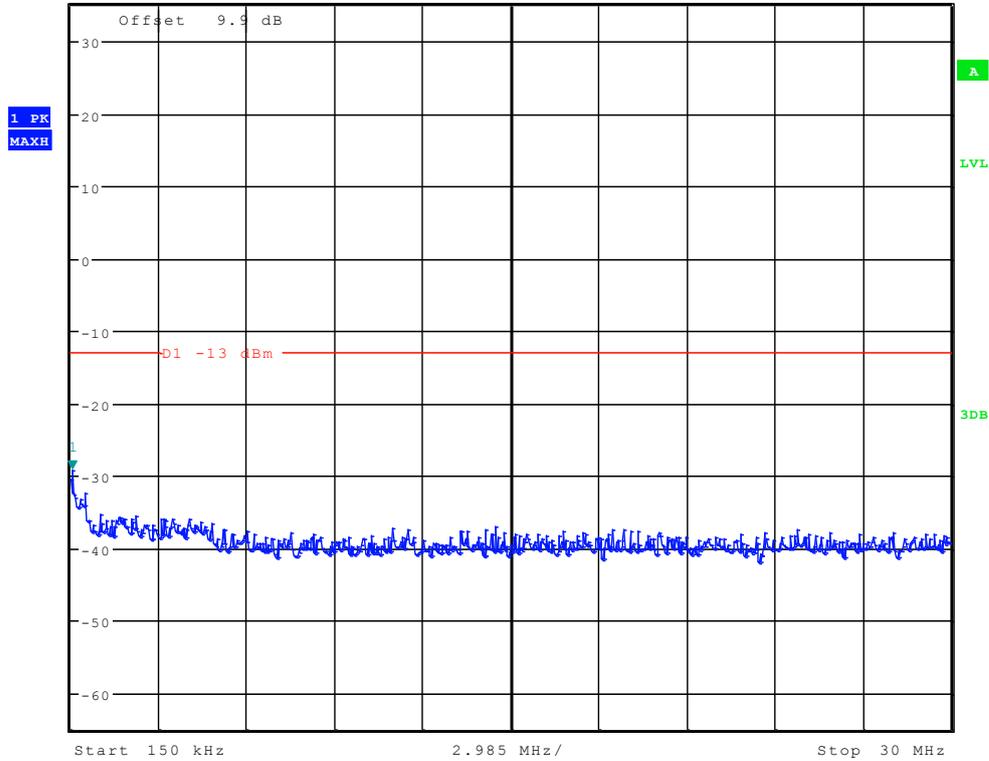


Date: 28.SEP.2011 00:04:50

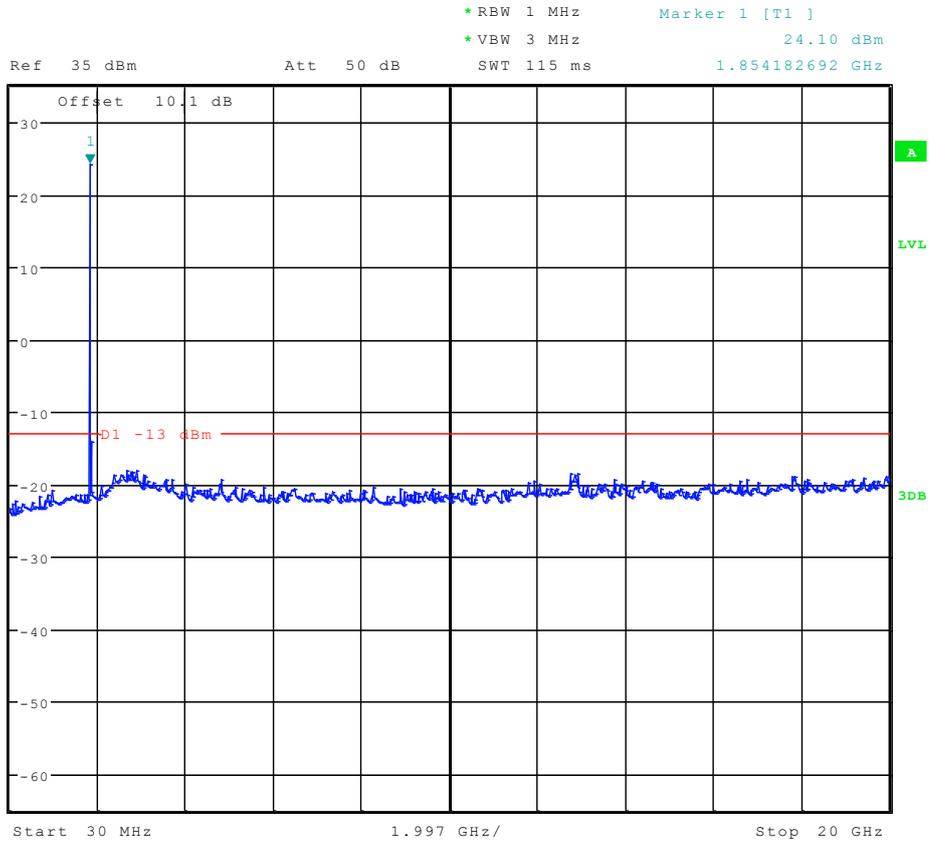


Date: 28.SEP.2011 00:05:34




Channel 810

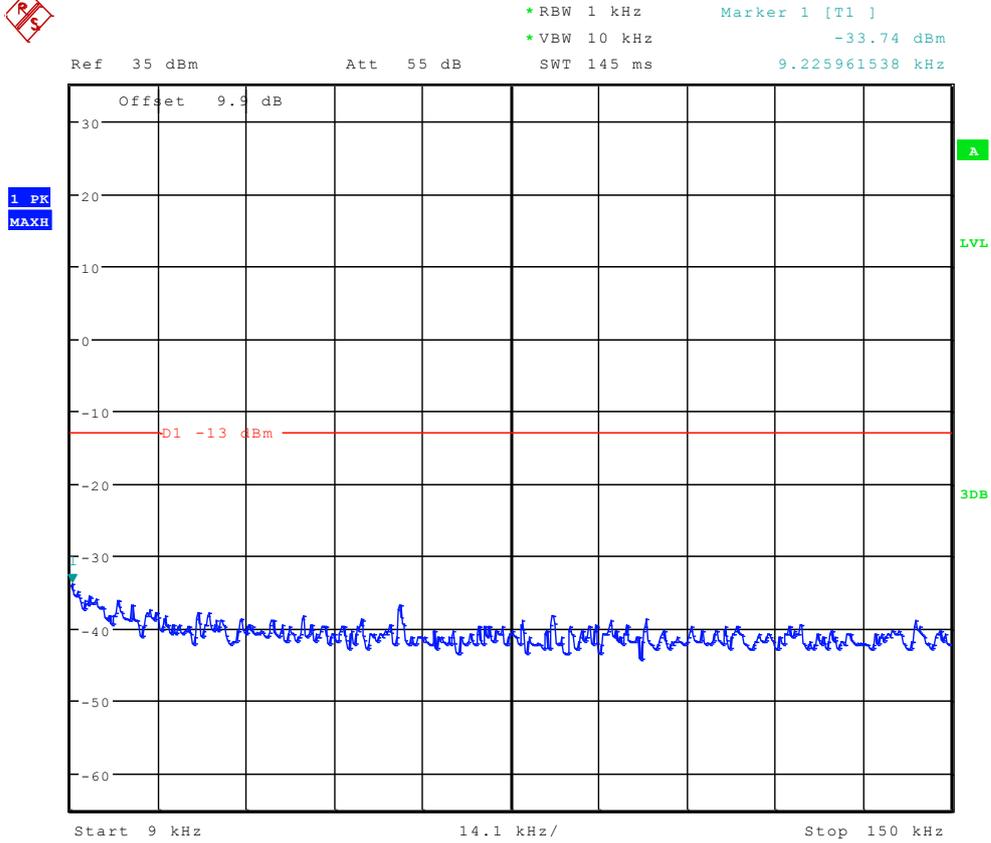

Date: 28.SEP.2011 00:04:20

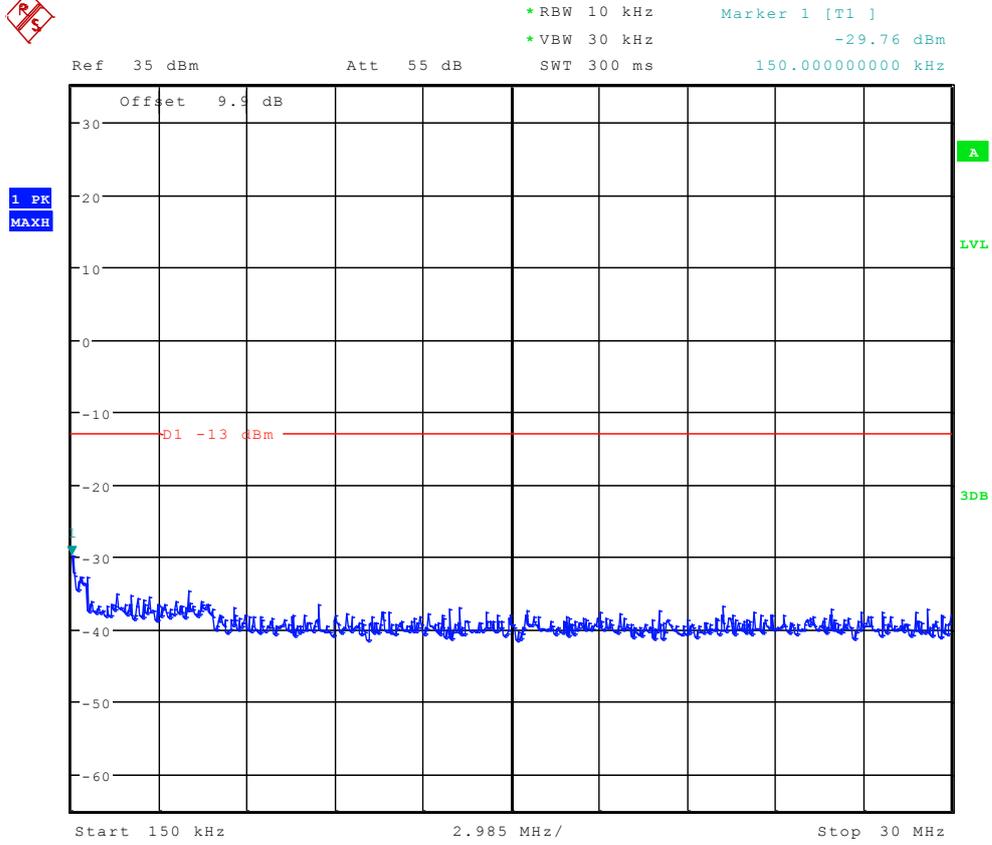


Date: 28.SEP.2011 00:05:04

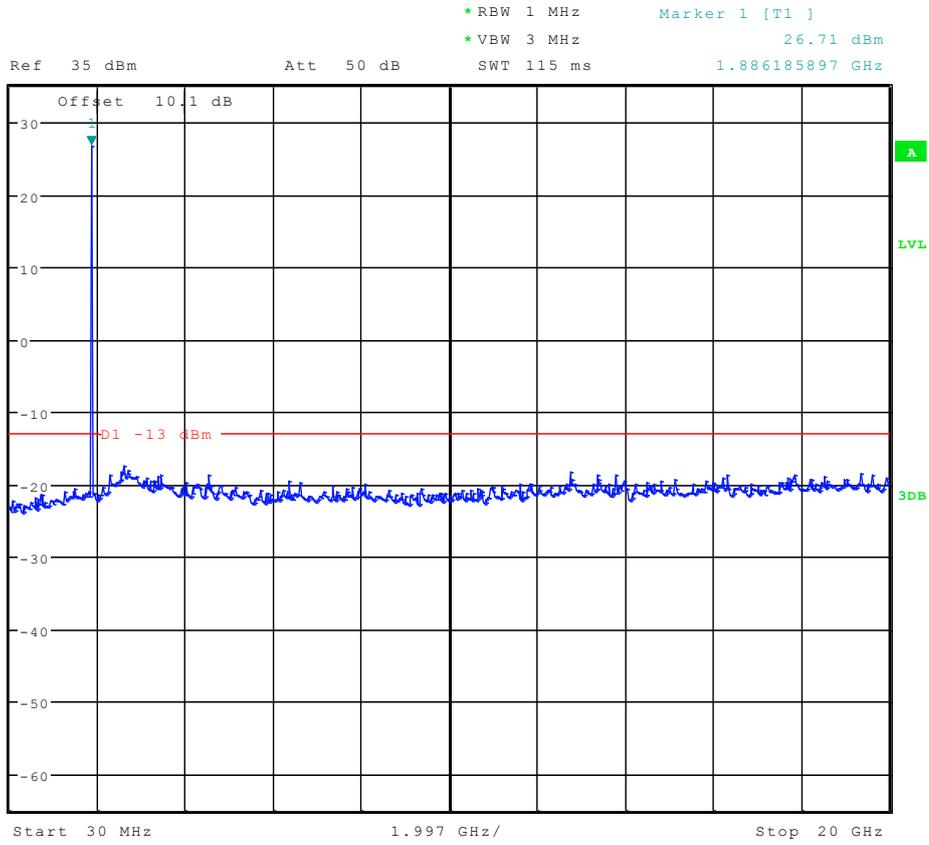


Date: 28.SEP.2011 00:05:48




TM2:EDGE Channel 512

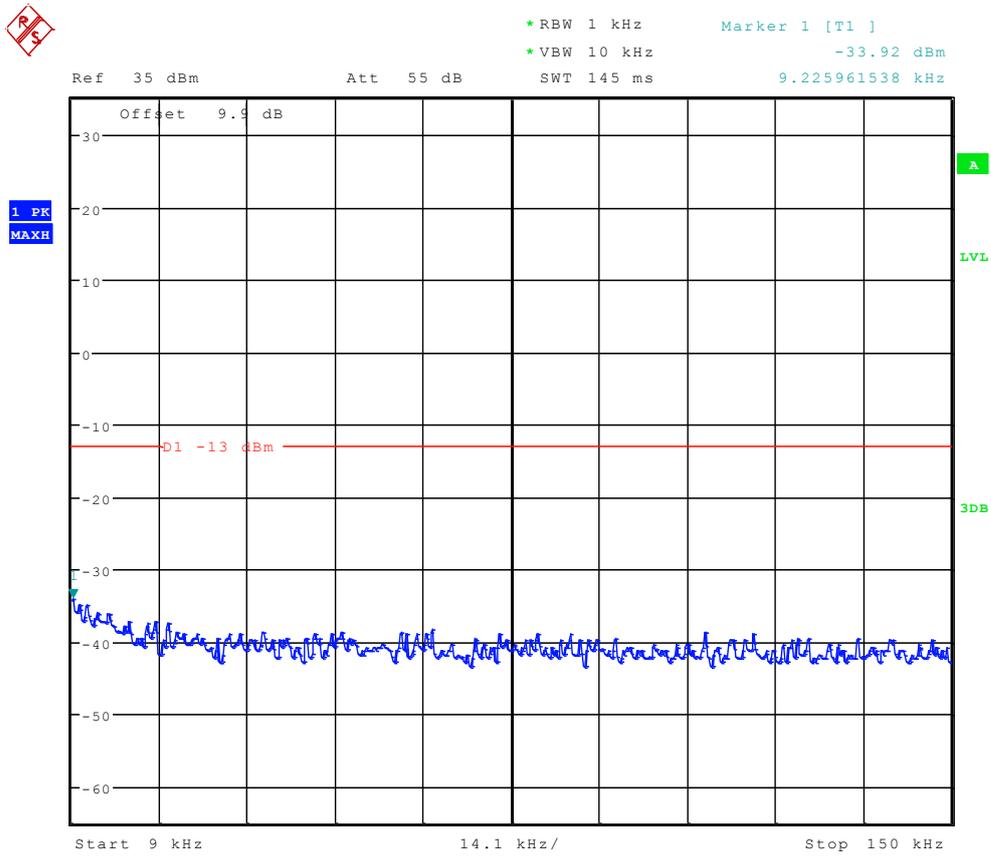

Date: 28.SEP.2011 00:09:34

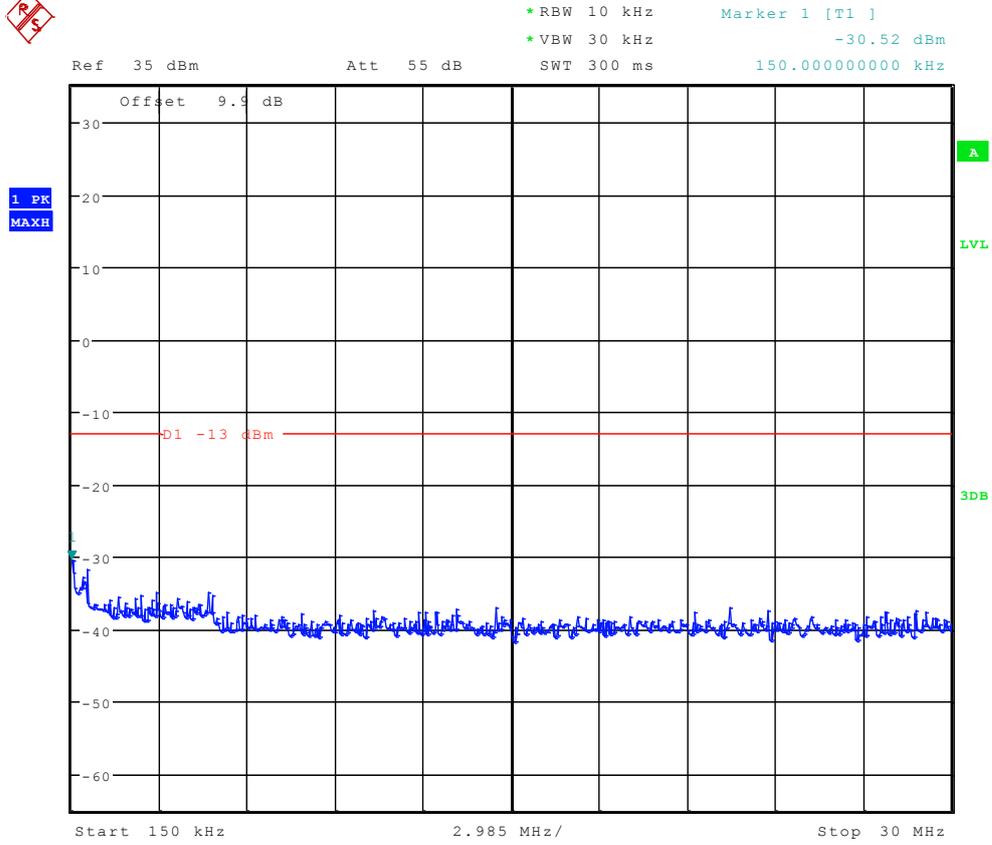


Date: 28.SEP.2011 00:10:18

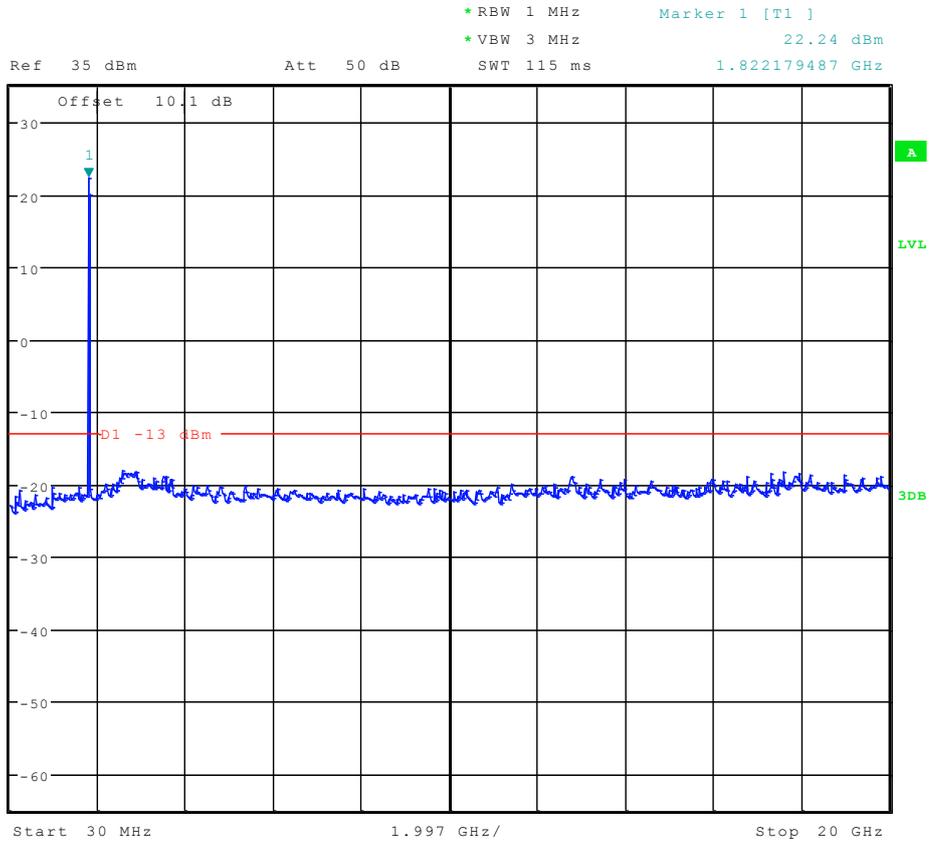


Date: 28.SEP.2011 00:11:02




Channel 661

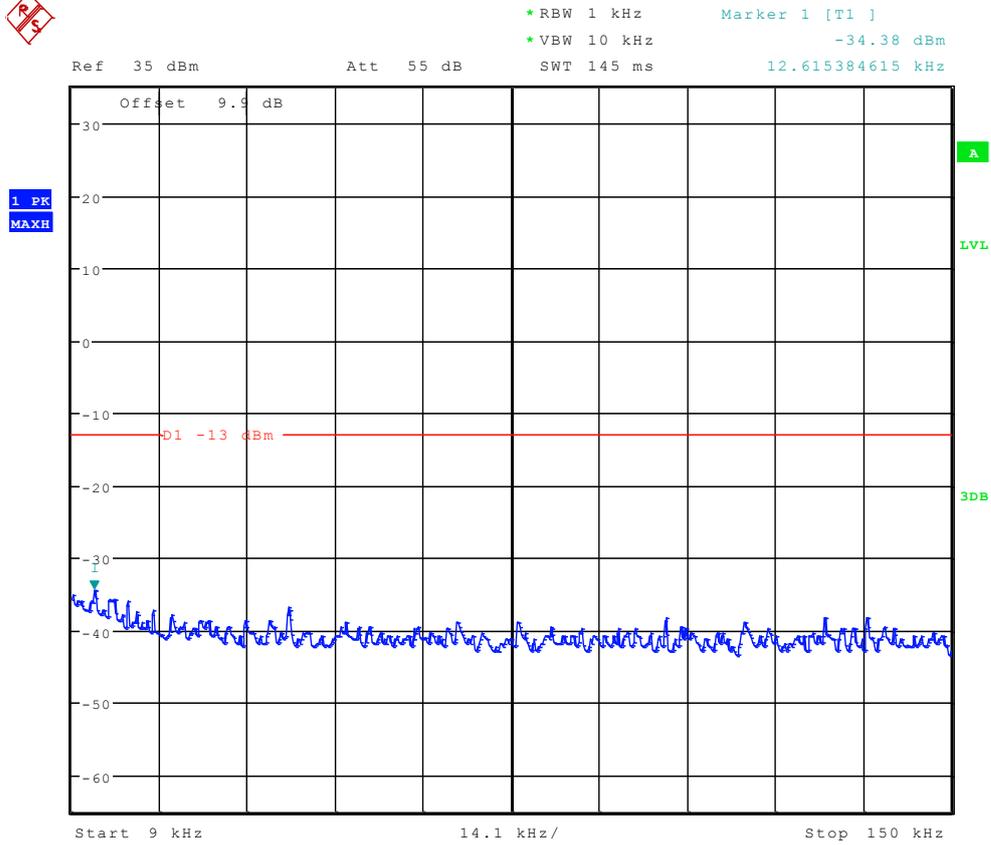

Date: 28.SEP.2011 00:09:48

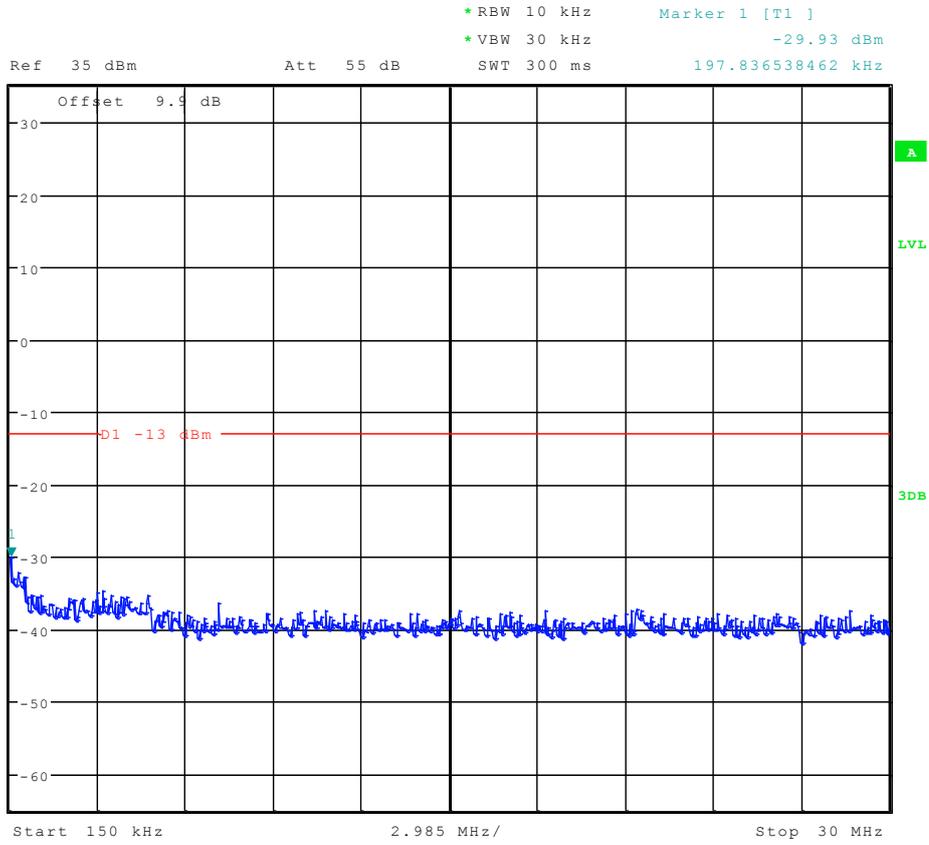


Date: 28.SEP.2011 00:10:33

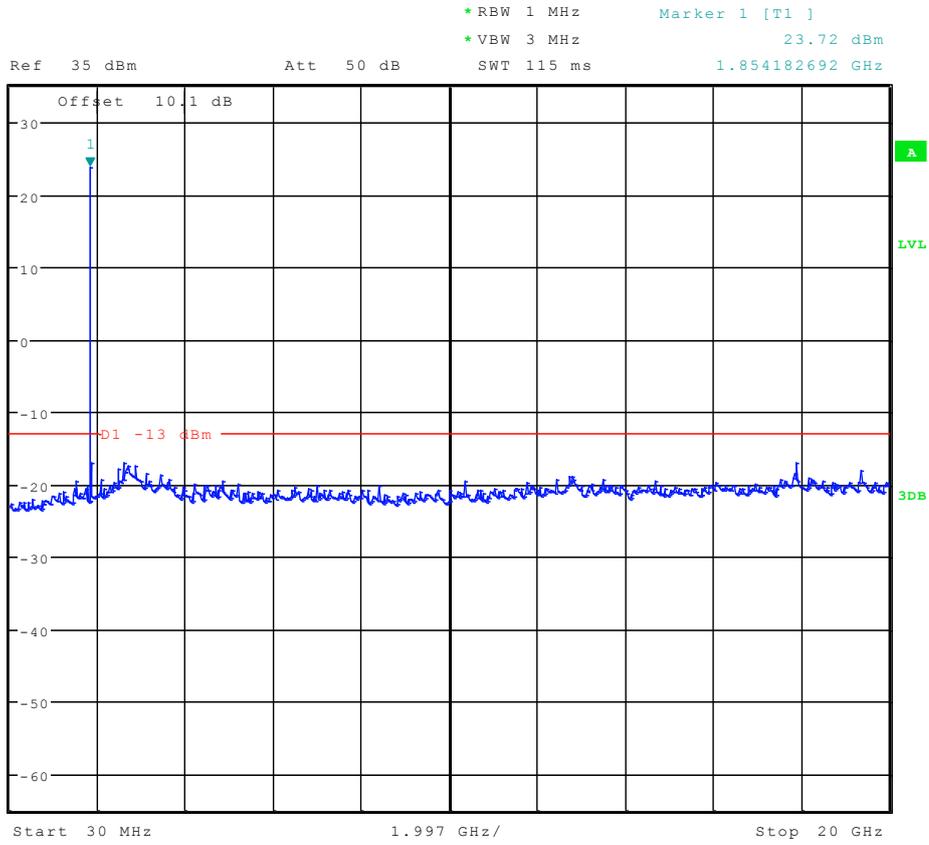

Date: 28.SEP.2011 00:11:17




Channel 810

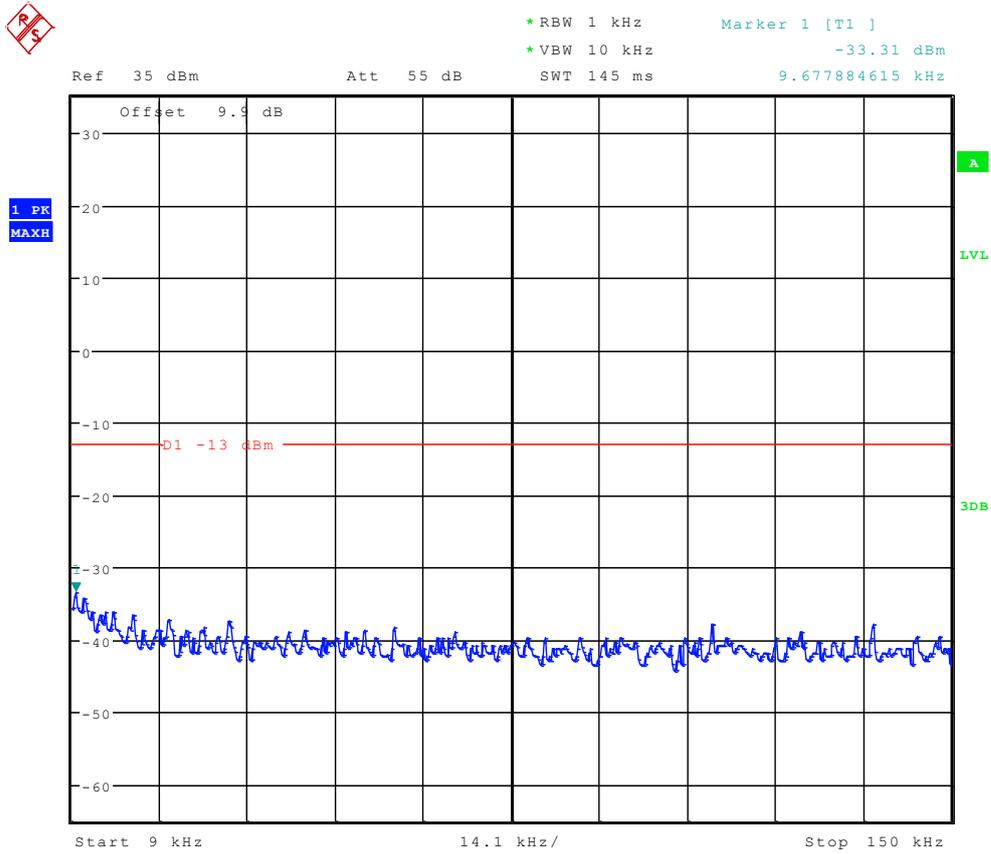


Date: 28.SEP.2011 00:10:03



Ref 35 dBm Att 55 dB SWT 300 ms
*RBW 10 kHz Marker 1 [T1] -28.03 dBm
*VBW 30 kHz 150.00000000 kHz

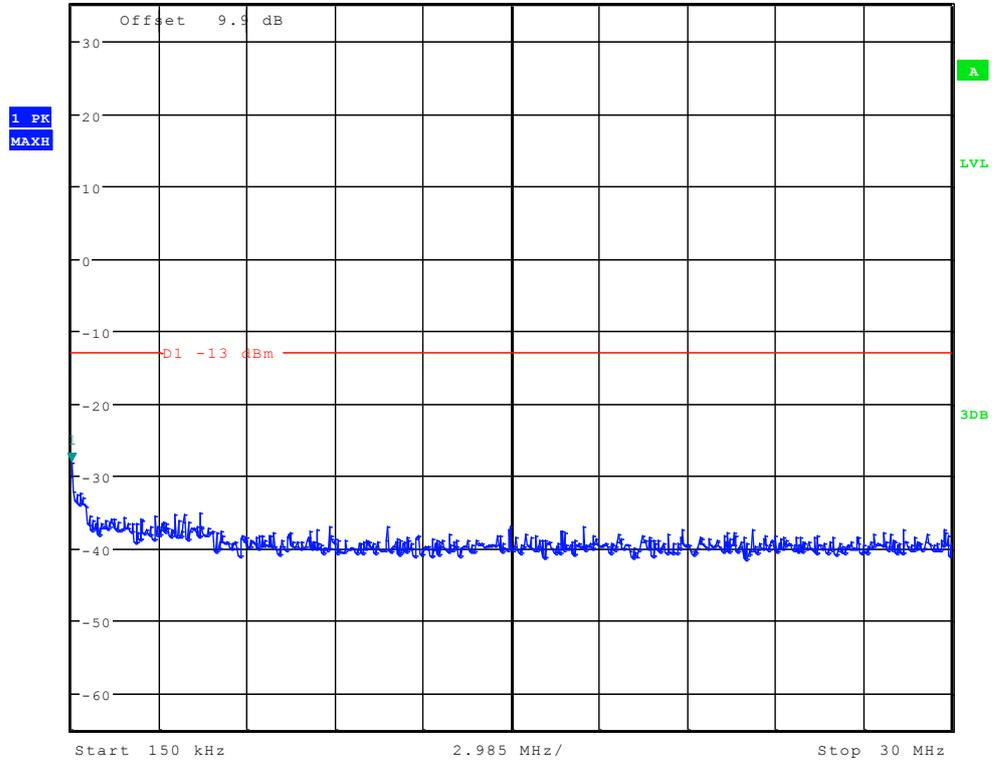

Date: 28.SEP.2011 00:10:47

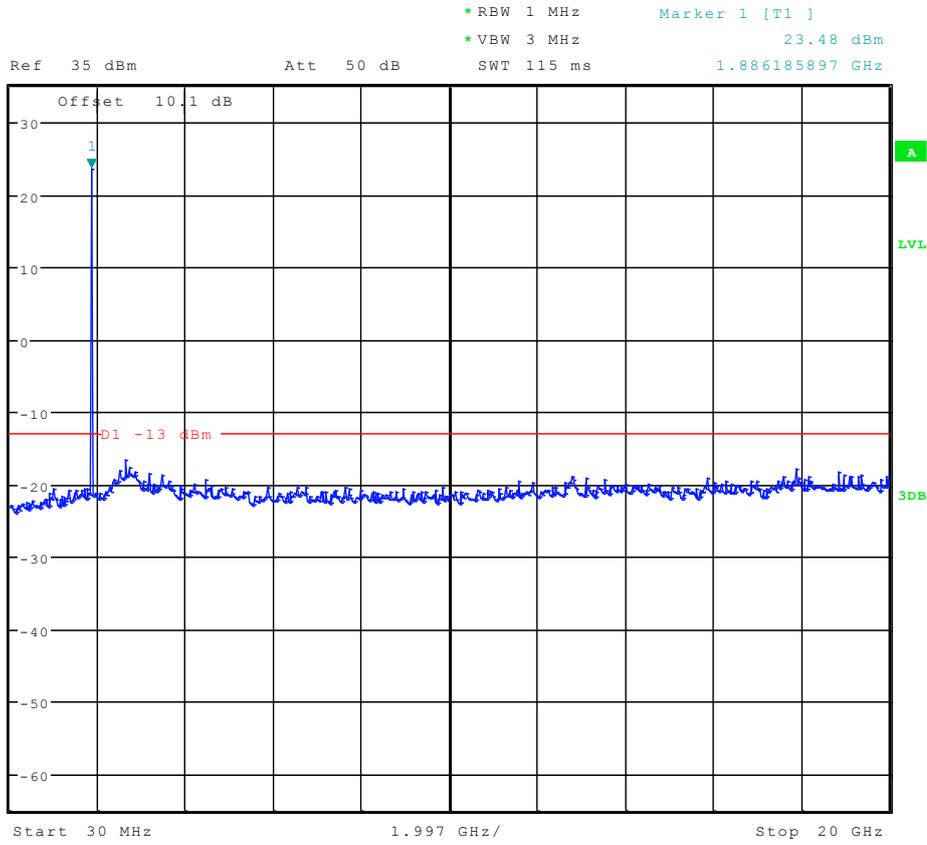

Date: 28.SEP.2011 00:11:31



Appendix E


Radiated spurious emission

According to FCC Part 2.1053& Part 24.238




GPRS 1900

(9kHz-30MHz)

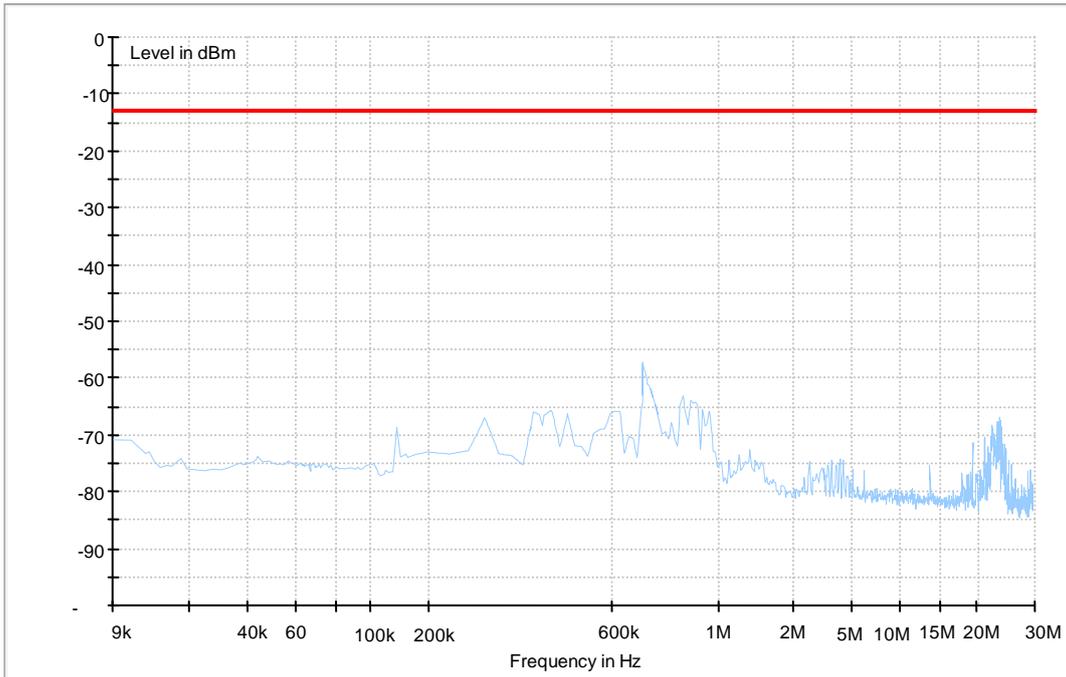


(30MHz~2GHz)

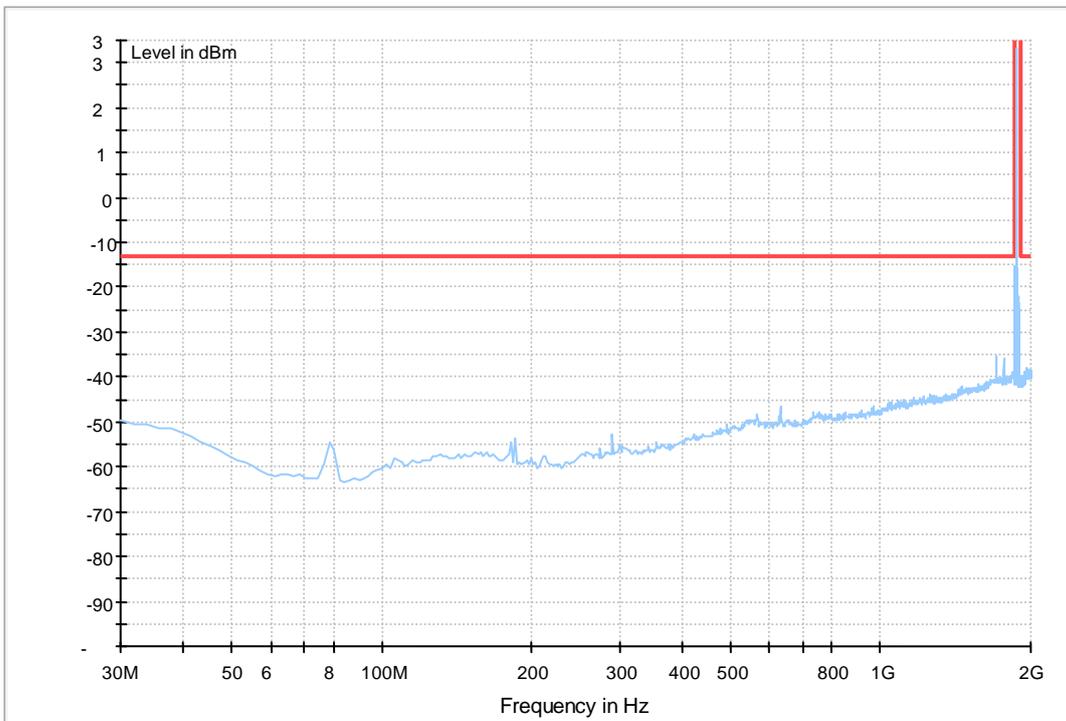




(2GHz~18GHz)

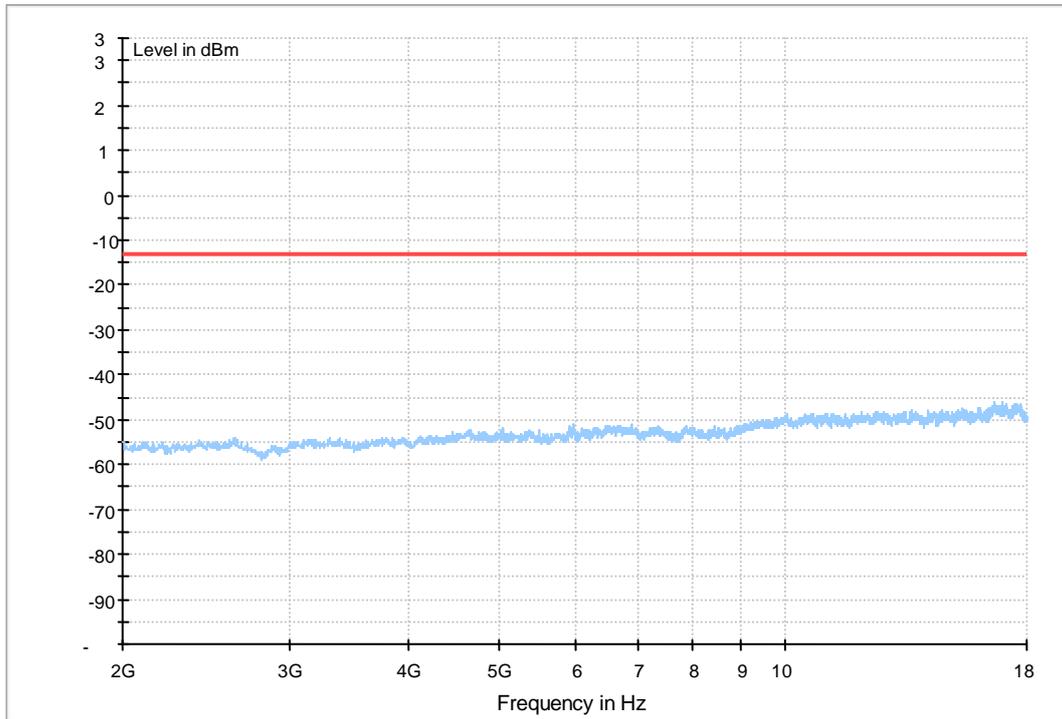


(18GHz-26.5GHz)

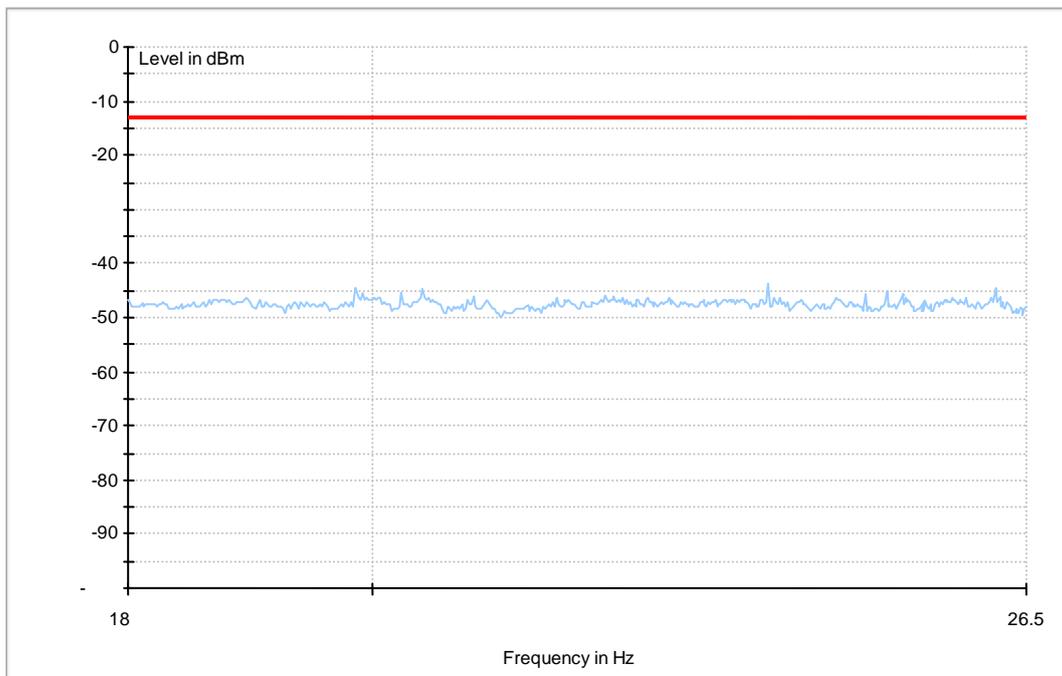




EDGE 1900

(9kHz-30MHz)

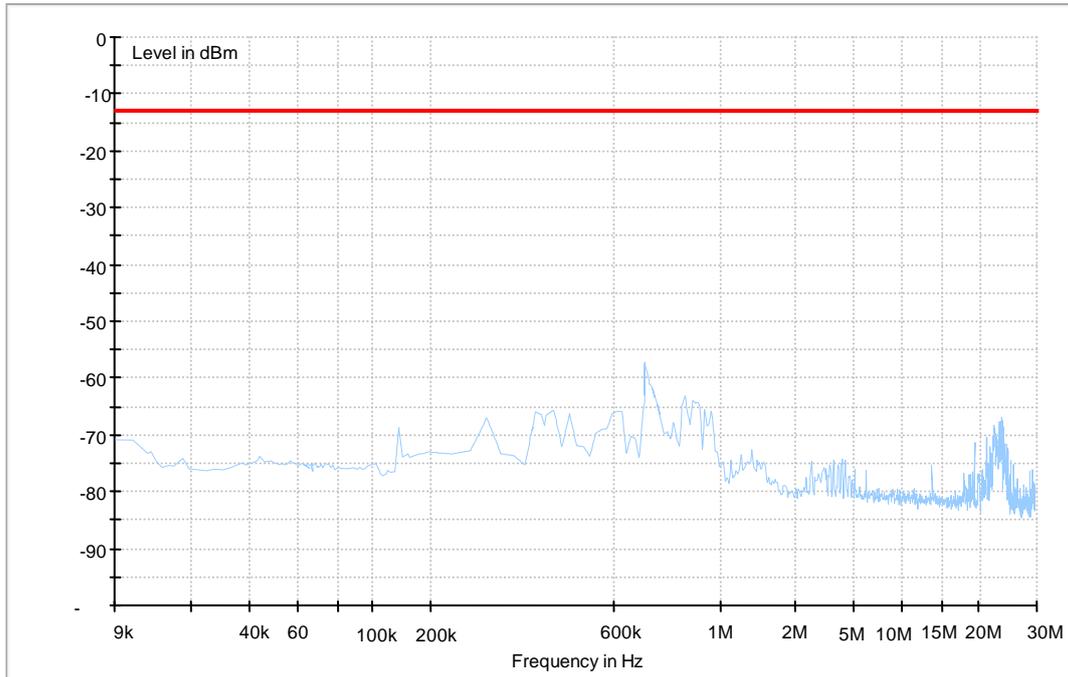


(30MHz~2GHz)

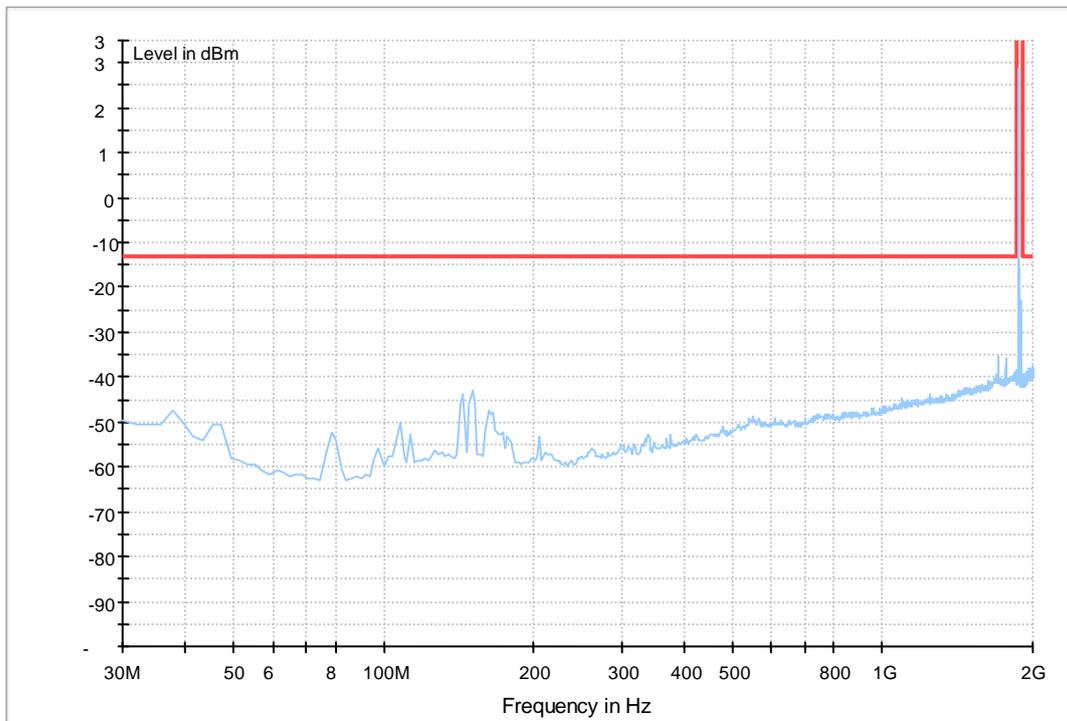




(2GHz~18GHz)

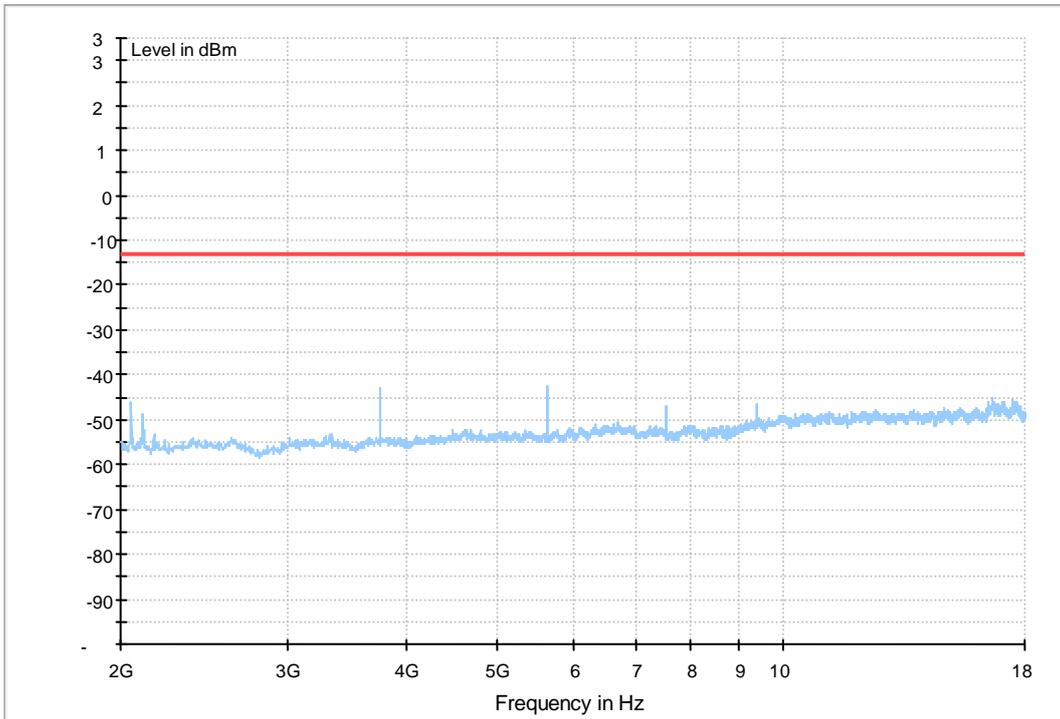

(18GHz-26.5GHz)

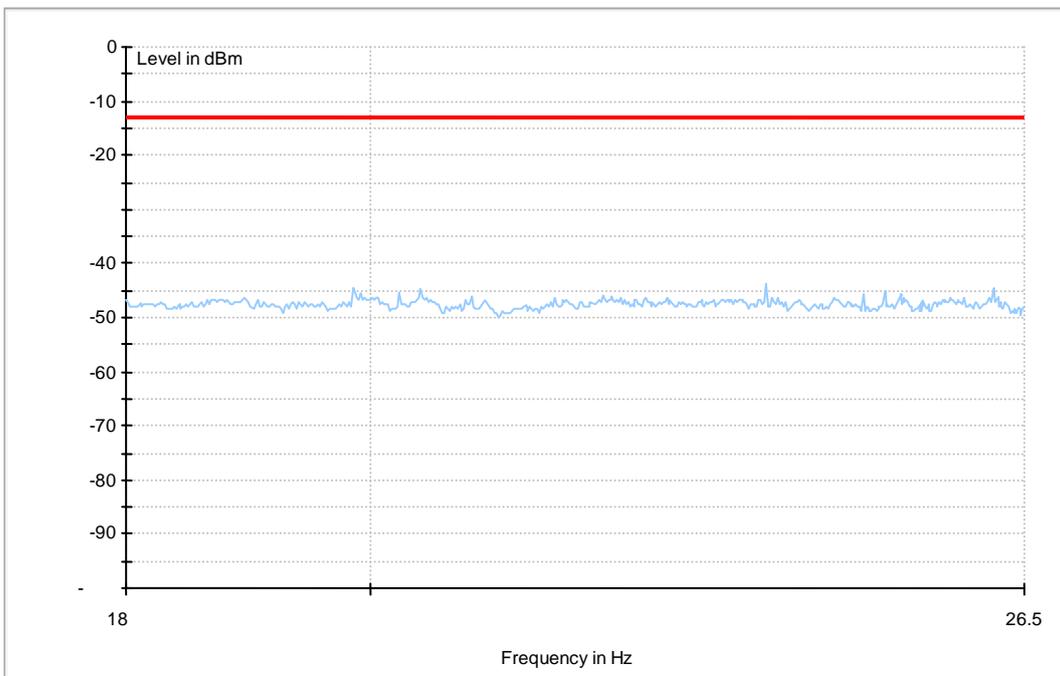



Appendix F

Photos of Radiated Spurious Emissions



Photos of Test Setup


1 Radiated Spurious Emissions



Radiated Spurious Emission (below 2GHz)



Radiated Spurious Emission (2GHz to18GHz)

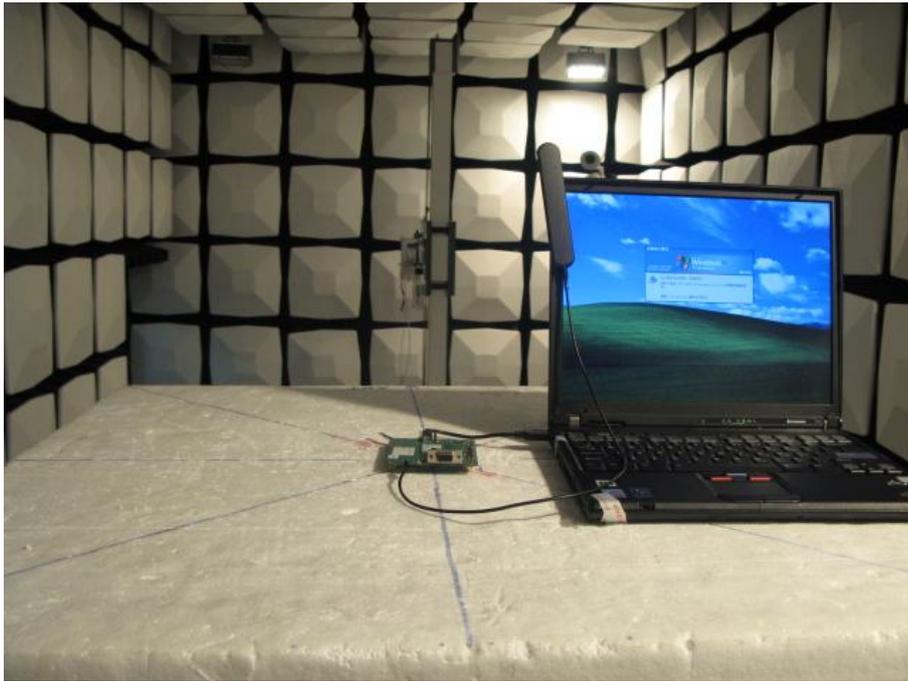

Radiated Spurious Emission (18GHz to26.5GHz)