


FCC Test Report

FCC ID: QISMYA-LX3

Project No. : 1610C248
Equipment : Smart phone
Model Name : MYA-L23, MYA-L03
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : Oct. 08, 2016
Date of Test : Oct. 08, 2016 ~ Nov. 14, 2016
Issued Date : Nov. 16, 2016
Tested by : BTL Inc.

Testing Engineer :



(Treey Chen)

Technical Manager :



(Bill Zhang)

Authorized Signatory :



(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
REPORT ISSUED HISTORY	4
1 . CERIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 MEASUREMENT INSTRUMENTS LIST	13
4.1.3 TEST PROCEDURE	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	43
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	43
4.2.2 MEASUREMENT INSTRUMENTS LIST	44
4.2.3 TEST PROCEDURE	45
4.2.4 DEVIATION FROM TEST STANDARD	45
4.2.5 TEST SETUP	46
4.2.6 EUT OPERATING CONDITIONS	46
4.2.7 TEST RESULTS-BELOW 1GHZ	46
4.2.8 TEST RESULTS-ABOVE 1GHZ	75

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1610C248	Original Issue.	Nov. 16, 2016

1. CERIFICATION

Equipment : Smart phone
Brand Name : HUawei
Model Name : MYA-L23, MYA-L03
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen
518129, P.R.China
Factory : Dong Guan Huabel Electronic Technology Co.,Ltd
Address : No.9 Industrial Northern Road,National High-Tech Industrial Development
Zone,SongShan Lake,Dong Guan City
Date of Test : Oct. 08, 2016 ~ Nov. 14, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B Class B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1610C248) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE(2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart phone
Brand Name	HUAWEI
Model Name	MYA-L23, MYA-L03
Model Difference	Please reference to note 3
Frequency	GSM850/1900 WCDMA B2/4/5 LTE B2/4/5/7/28 BT / Wi-Fi / GPS
Power Source	#1 DC Voltage supplied from AC/DC adapter. #2 Battery Supplied.
Power Rating	#1:AC 100–240V 50/60Hz,0.5A DC 5V 1 #2:DC 3.82V 2920mAh
HW Version	VER.A
SW Version	Maya-L23C00B004

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.

Item	Mfr/Brand	Model.
Battery	Harbin Coslight Power Co., Ltd.	HB405979ECW
	Sunwoda Electronic Co., LTD	
	SCUD (FUJIAN) Electronics Co., Ltd	
	DESAY CORPORATION	
USB Cable	HONGLIN TECHNOLOGY CO.,LTD	130-26654
	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	CUBB01M-HC208-D
	Shenzhen Luxshare Precision Industry Co.,Ltd.	L99U2013-CS-H
Earphone	Jiangxi Lianchuang Hongsheng Electronic Co.,LTD	MEMD1632B580C00
	MERRY ELECTRONICS CO., LTD.	EMC309-001
	BOLUO COUNTY QUANCHENG ELECTRONIC CO.,LTD	1311-3291-3.5mm-229
Adapter	Dongguan Phitek Electronics Co., Ltd	HW-050100U01
	Shenzhen Huntkey Electric Co., Ltd.	
	HUIZHOU BYD ELECTRONIC CO., LTD.	

3.

Article 1: Difference description:

The difference between MYA-L03 and MYA-L23 is show in the below table:

		MYA-L03	MYA-L23
Licensed Frequency	LTE	B2/4/5/7	B2/4/5/7
	UMTS	B2/4/5	B2/4/5
	GSM	GSM850/1900	GSM850/1900
	IC	the same	the same
	Antenna	the same	the same
Unlicensed Frequency	Bluetooth	the same	the same
	2.4G Wi-Fi	the same	the same
	IC	the same	the same
	Antenna	the same	the same
Hardware	Ram / Rom	the same	the same
	PCB	the same	the same
	USB Port	the same	the same
	RJ11 Port	NA	NA
	RJ45 Port	NA	NA
Appearance	Dimension	the same	the same
	Color	the same	the same
Accessory	Battery	the same	the same
	External Charger	the same	the same
	USB label	the same	the same
	Earphone	the same	the same
other	SIM card	Single card	Double
	NFC	Non-support	Non-support

3.2 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	USB COPY(EUT WITH PC)+IDLE
Mode 2	Adapter+BT+ WIFI+GPS+Camera on
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earphone
Mode 5	Adapter+Traffic (GSM)
Mode 6	Adapter+Traffic (WCDMA)
Mode 7	Adapter+Traffic (LTE)

For Conducted Test	
Final Test Mode	Description
Mode 1	USB COPY(EUT WITH PC)+IDLE
Mode 2	Adapter+BT+ WIFI+GPS+Camera on
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earphone
Mode 5	Adapter+Traffic (GSM)
Mode 6	Adapter+Traffic (WCDMA)
Mode 7	Adapter+Traffic (LTE)

For Radiated Test	
Final Test Mode	Description
Mode 1	USB COPY(EUT WITH PC)+IDLE
Mode 2	Adapter+BT+ WIFI+GPS+Camera on
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earphone
Mode 5	Adapter+Traffic (GSM)
Mode 6	Adapter+Traffic (WCDMA)
Mode 7	Adapter+Traffic (LTE)

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

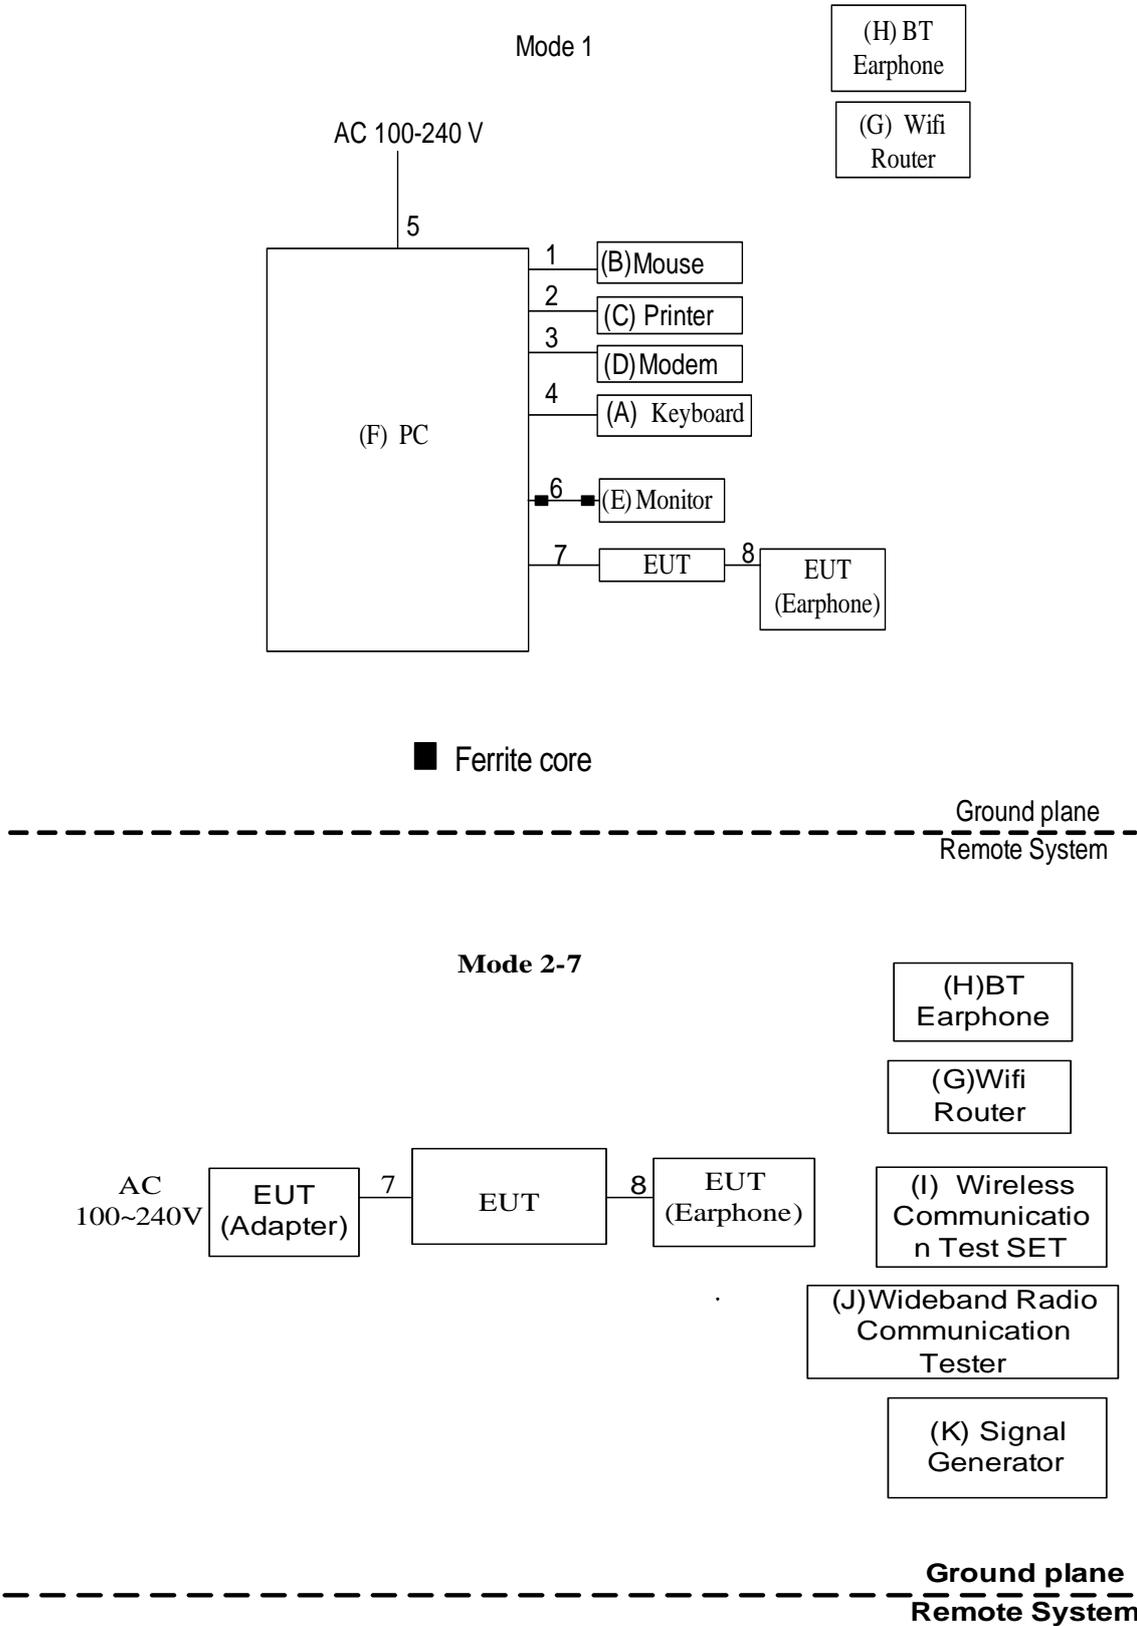

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071T08NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6AG-1WNS
F	PC	Dell 745	DCSM	DOC	G7K832X
G	wireless router	ASUS	RT-AC66U	MSQ-RTAC66U	E8ICGG000138
H	BT earphone	N/A	N/A	N/A	N/A
I	Wireless Communication Test SET	Agilent	8960 Series	N/A	MY48364183
J	Wideband Radio Communication Tester	RS	CMW500	N/A	122125
K	SignalGenerator	Agilent	E4438C	N/A	MY49071316

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.1m	Audio Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
2	LISN	EMCO	3816/2	00052765	Mar. 27, 2017
3	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 27, 2017
5	Cable	emci	RG223(9KHz-30 MHz)(5m)	N/A	Mar. 10, 2017
6	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- f. First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB, otherwise, QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

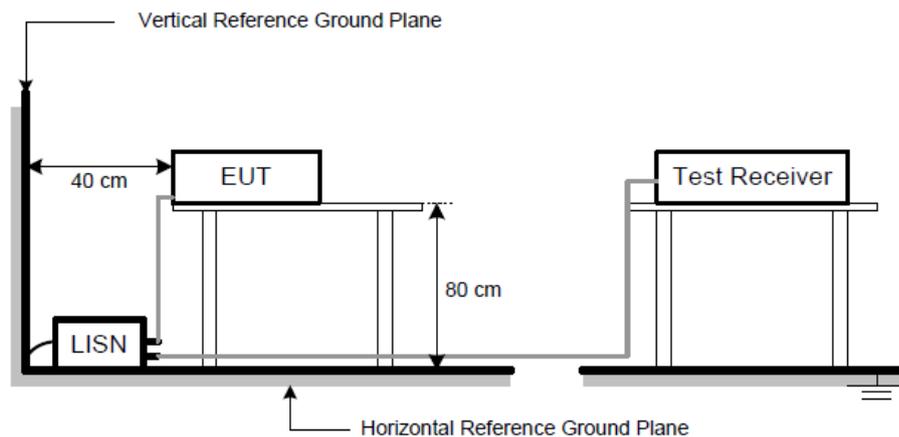

4.1.6 EUT OPERATING CONDITIONS


The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.7 TEST RESULTS

Remark


- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz,VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB CABLE:FOXCONN		
Test Engineer	Trey Chen		

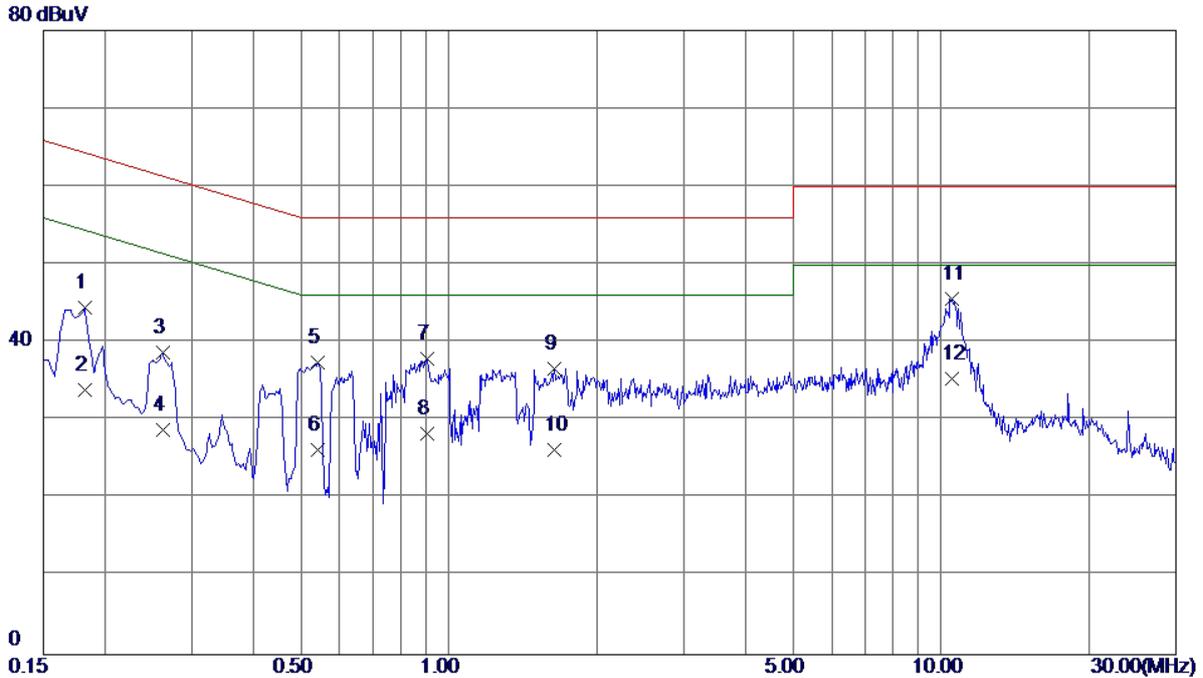


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1819	34.94	9.57	44.51	64.40	-19.89	QP
2	0.1819	24.30	9.57	33.87	54.40	-20.53	AVG
3	0.2620	29.13	9.57	38.70	61.37	-22.67	QP
4	0.2620	19.20	9.57	28.77	51.37	-22.60	AVG
5	0.5420	27.81	9.69	37.50	56.00	-18.50	QP
6	0.5420	16.50	9.69	26.19	46.00	-19.81	AVG
7	0.9060	28.13	9.83	37.96	56.00	-18.04	QP
8	0.9060	18.50	9.83	28.33	46.00	-17.67	AVG
9	1.6380	26.68	9.98	36.66	56.00	-19.34	QP
10	1.6380	16.30	9.98	26.28	46.00	-19.72	AVG
11 *	10.5340	35.16	10.51	45.67	60.00	-14.33	QP
12	10.5340	24.90	10.51	35.41	50.00	-14.59	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB CABLE:FOXCONN		
Test Engineer	Trey Chen		

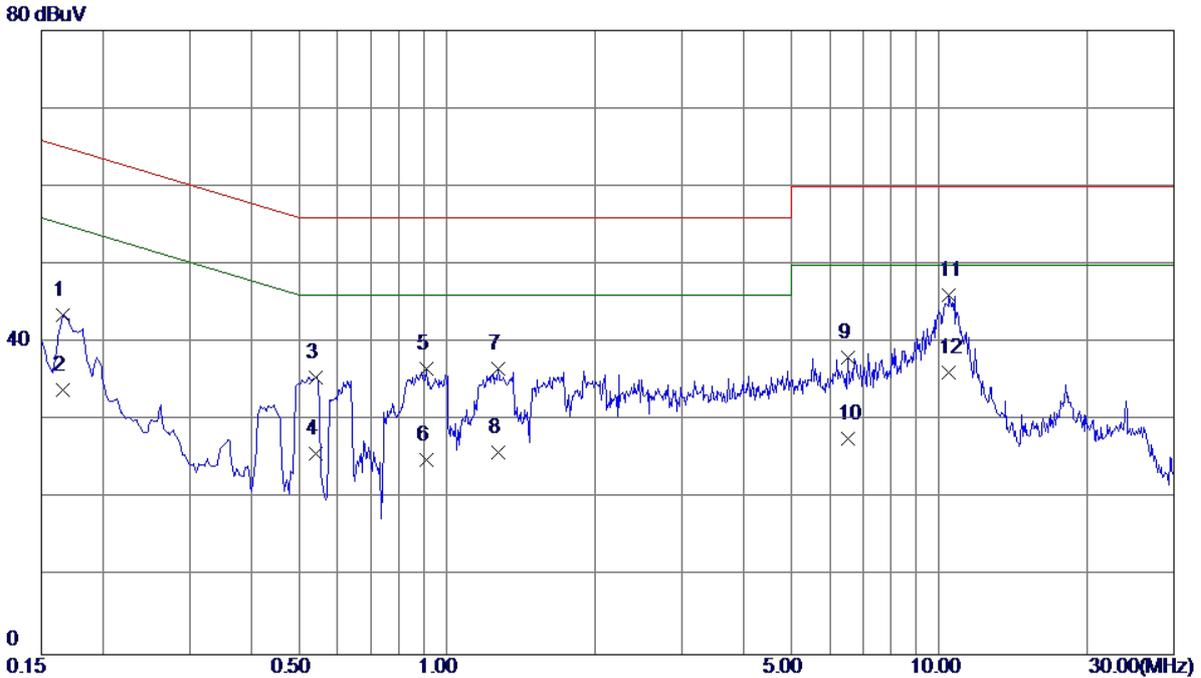


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	34.06	9.49	43.55	65.16	-21.61	QP
2	0.1660	24.50	9.49	33.99	55.16	-21.17	AVG
3	0.5420	26.06	9.49	35.55	56.00	-20.45	QP
4	0.5420	16.20	9.49	25.69	46.00	-20.31	AVG
5	0.9100	26.96	9.73	36.69	56.00	-19.31	QP
6	0.9100	15.30	9.73	25.03	46.00	-20.97	AVG
7	1.2740	26.83	9.76	36.59	56.00	-19.41	QP
8	1.2740	16.20	9.76	25.96	46.00	-20.04	AVG
9	6.5340	27.87	10.22	38.09	60.00	-21.91	QP
10	6.5340	17.50	10.22	27.72	50.00	-22.28	AVG
11	10.4660	35.48	10.60	46.08	60.00	-13.92	QP
12 *	10.4660	25.60	10.60	36.20	50.00	-13.80	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB CABLE:HONGLIN		
Test Engineer	Trey Chen		

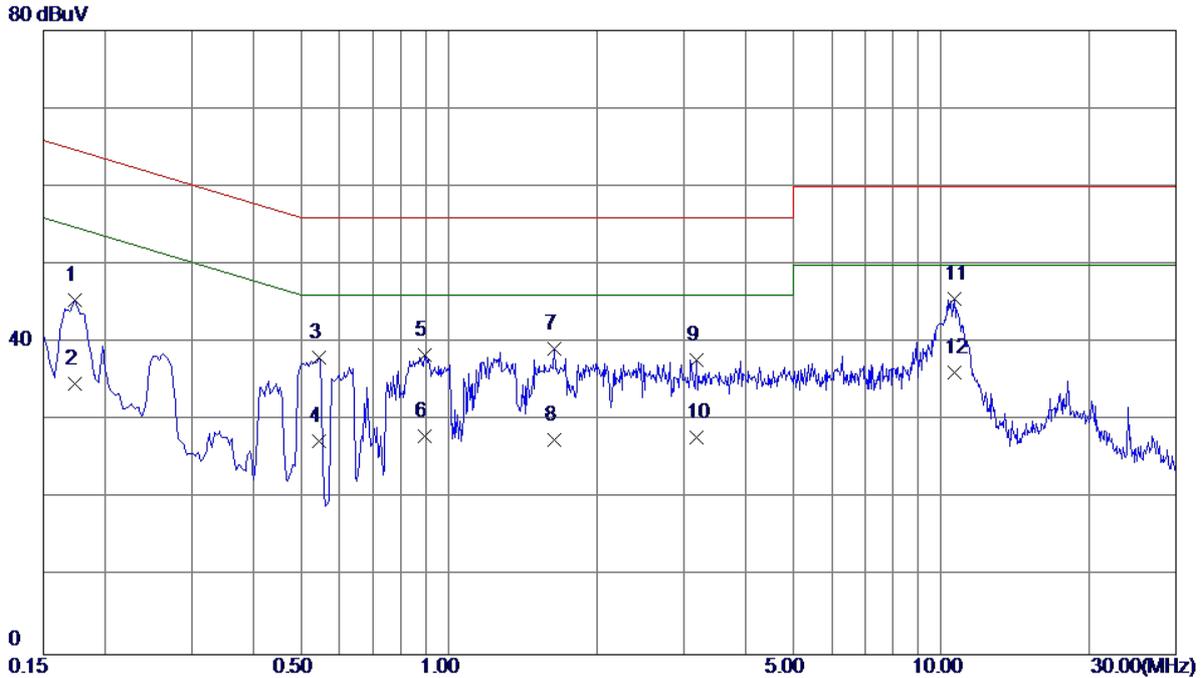


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1740	35.81	9.57	45.38	64.77	-19.39	QP
2	0.1740	25.20	9.57	34.77	54.77	-20.00	AVG
3	0.5460	28.38	9.69	38.07	56.00	-17.93	QP
4	0.5460	17.65	9.69	27.34	46.00	-18.66	AVG
5	0.8940	28.57	9.83	38.40	56.00	-17.60	QP
6	0.8940	18.20	9.83	28.03	46.00	-17.97	AVG
7	1.6380	29.18	9.98	39.16	56.00	-16.84	QP
8	1.6380	17.60	9.98	27.58	46.00	-18.42	AVG
9	3.1860	27.50	10.28	37.78	56.00	-18.22	QP
10	3.1860	17.61	10.28	27.89	46.00	-18.11	AVG
11	10.6700	35.00	10.52	45.52	60.00	-14.48	QP
12 *	10.6700	25.59	10.52	36.11	50.00	-13.89	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB CABLE:HONGLIN		
Test Engineer	Trey Chen		

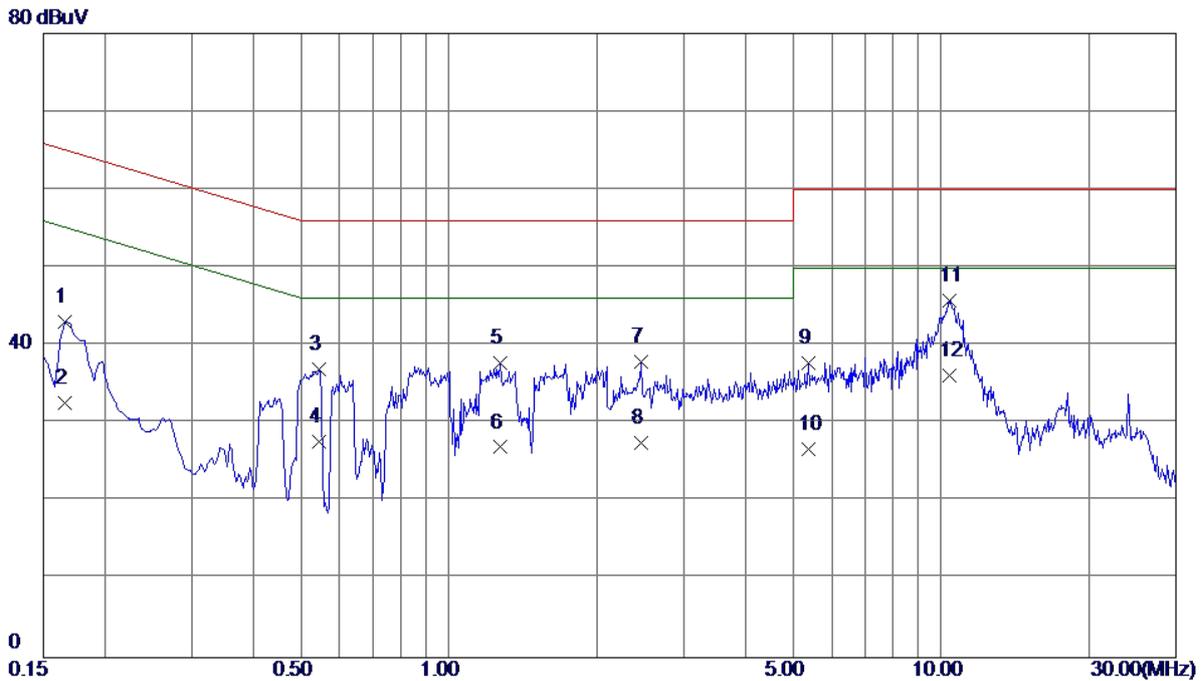


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	33.59	9.49	43.08	65.16	-22.08	QP
2	0.1660	23.20	9.49	32.69	55.16	-22.47	AVG
3	0.5460	27.43	9.49	36.92	56.00	-19.08	QP
4	0.5460	18.20	9.49	27.69	46.00	-18.31	AVG
5	1.2740	28.07	9.76	37.83	56.00	-18.17	QP
6	1.2740	17.20	9.76	26.96	46.00	-19.04	AVG
7	2.4580	28.02	9.92	37.94	56.00	-18.06	QP
8	2.4580	17.60	9.92	27.52	46.00	-18.48	AVG
9	5.3700	27.57	10.24	37.81	60.00	-22.19	QP
10	5.3700	16.49	10.24	26.73	50.00	-23.27	AVG
11	10.4100	35.18	10.60	45.78	60.00	-14.22	QP
12 *	10.4100	25.60	10.60	36.20	50.00	-13.80	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB CABLE:Luxshare		
Test Engineer	Trey Chen		

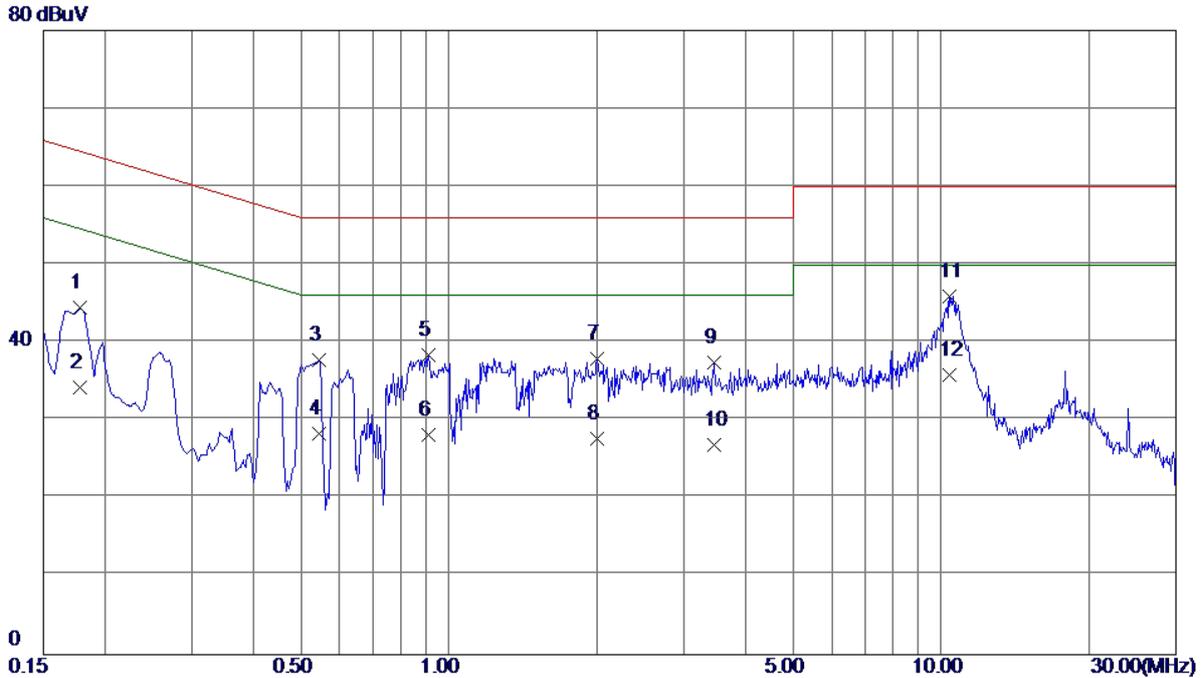


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1780	34.93	9.57	44.50	64.58	-20.08	QP
2	0.1780	24.60	9.57	34.17	54.58	-20.41	AVG
3	0.5460	28.07	9.69	37.76	56.00	-18.24	QP
4	0.5460	18.60	9.69	28.29	46.00	-17.71	AVG
5	0.9100	28.60	9.83	38.43	56.00	-17.57	QP
6	0.9100	18.30	9.83	28.13	46.00	-17.87	AVG
7	2.0020	27.91	10.01	37.92	56.00	-18.08	QP
8	2.0020	17.70	10.01	27.71	46.00	-18.29	AVG
9	3.4580	27.16	10.32	37.48	56.00	-18.52	QP
10	3.4580	16.50	10.32	26.82	46.00	-19.18	AVG
11 *	10.4060	35.38	10.51	45.89	60.00	-14.11	QP
12	10.4060	25.30	10.51	35.81	50.00	-14.19	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB CABLE:Luxshare		
Test Engineer	Trey Chen		

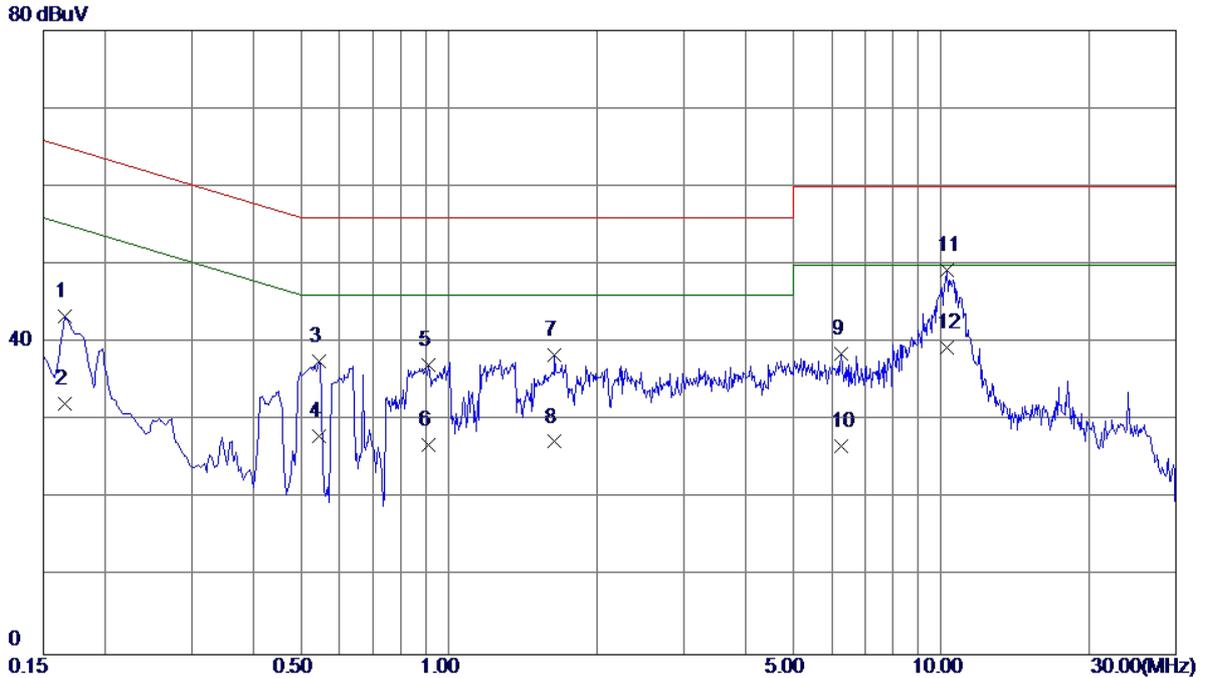


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	33.87	9.49	43.36	65.16	-21.80	QP
2	0.1660	22.60	9.49	32.09	55.16	-23.07	AVG
3	0.5460	28.10	9.49	37.59	56.00	-18.41	QP
4	0.5460	18.50	9.49	27.99	46.00	-18.01	AVG
5	0.9100	27.46	9.73	37.19	56.00	-18.81	QP
6	0.9100	17.20	9.73	26.93	46.00	-19.07	AVG
7	1.6380	28.59	9.78	38.37	56.00	-17.63	QP
8	1.6380	17.50	9.78	27.28	46.00	-18.72	AVG
9	6.2780	28.40	10.22	38.62	60.00	-21.38	QP
10	6.2780	16.51	10.22	26.73	50.00	-23.27	AVG
11	10.2739	38.73	10.60	49.33	60.00	-10.67	QP
12 *	10.2739	28.80	10.60	39.40	50.00	-10.60	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	USB CABLE:Luxshare+Adapter:BYD Battery:SUNWODA		
Test Engineer	Trey Chen		

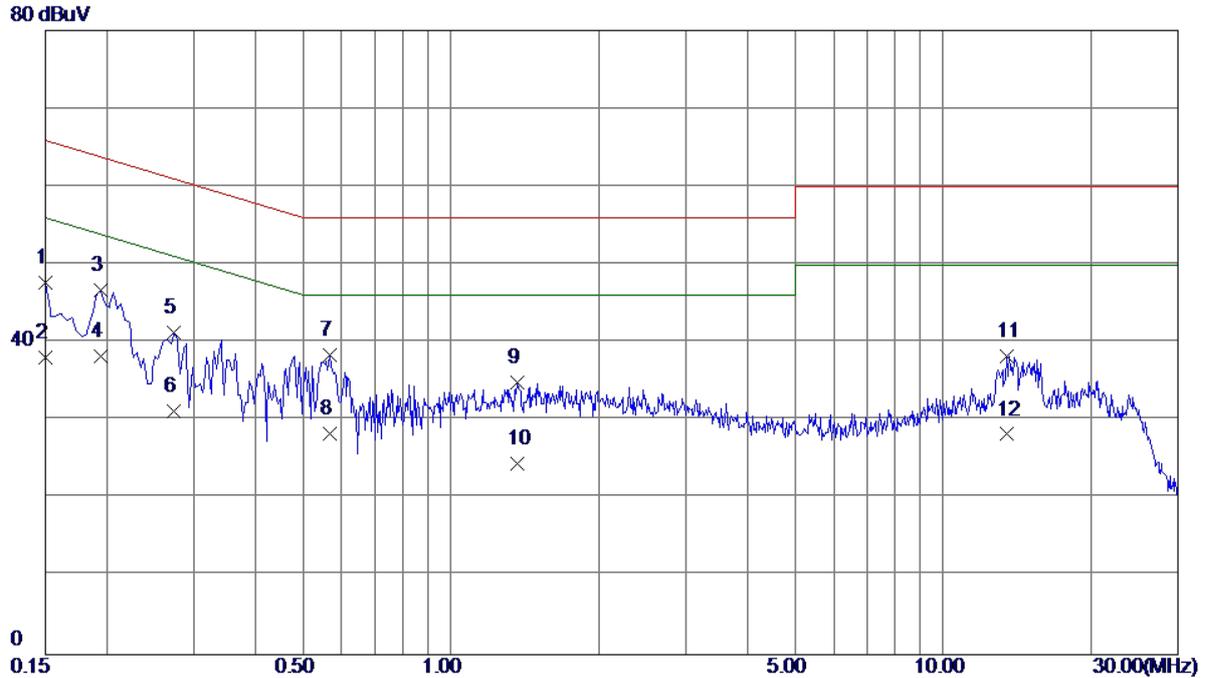


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	38.16	9.57	47.73	66.00	-18.27	QP
2	0.1500	28.50	9.57	38.07	56.00	-17.93	AVG
3	0.1940	37.20	9.57	46.77	63.86	-17.09	QP
4 *	0.1940	28.60	9.57	38.17	53.86	-15.69	AVG
5	0.2740	31.67	9.57	41.24	61.00	-19.76	QP
6	0.2740	21.60	9.57	31.17	51.00	-19.83	AVG
7	0.5660	28.64	9.70	38.34	56.00	-17.66	QP
8	0.5660	18.60	9.70	28.30	46.00	-17.70	AVG
9	1.3660	24.89	9.92	34.81	56.00	-21.19	QP
10	1.3660	14.61	9.92	24.53	46.00	-21.47	AVG
11	13.4620	27.64	10.64	38.28	60.00	-21.72	QP
12	13.4620	17.60	10.64	28.24	50.00	-21.76	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	USB CABLE:Luxshare+Adapter:BYD Battery:SUNWODA		
Test Engineer	Trey Chen		

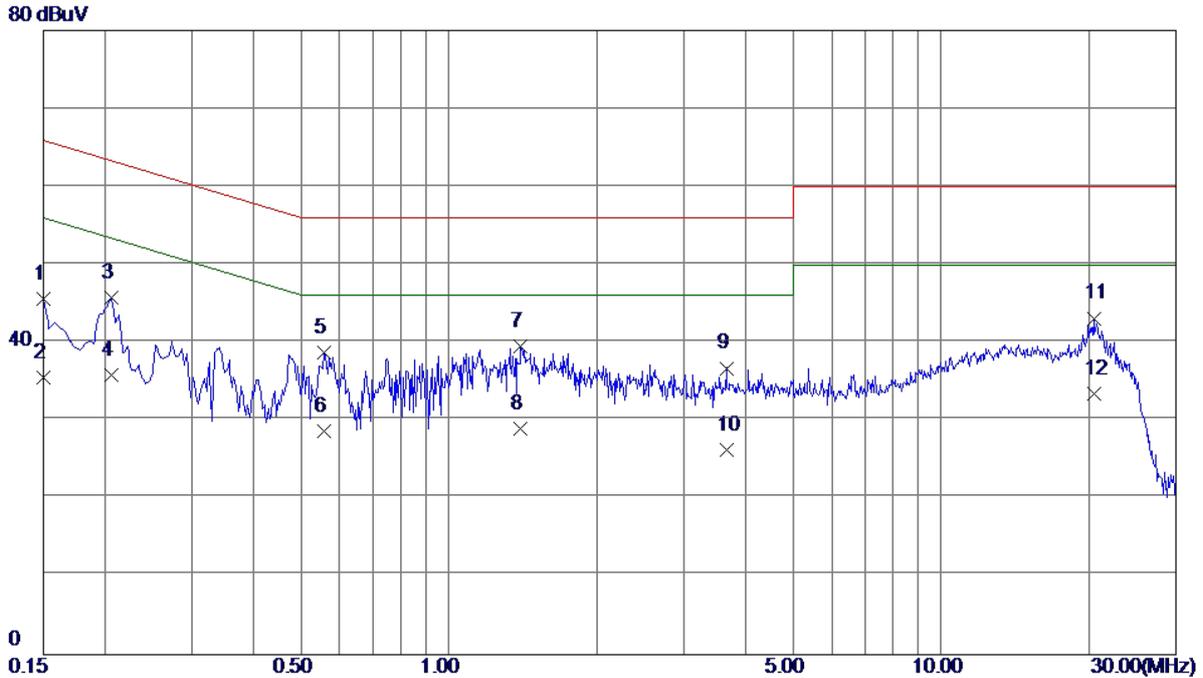


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	35.99	9.57	45.56	66.00	-20.44	QP
2	0.1500	25.90	9.57	35.47	56.00	-20.53	AVG
3	0.2060	36.21	9.57	45.78	63.37	-17.59	QP
4	0.2060	26.20	9.57	35.77	53.37	-17.60	AVG
5	0.5580	29.20	9.50	38.70	56.00	-17.30	QP
6	0.5580	19.20	9.50	28.70	46.00	-17.30	AVG
7 *	1.3980	29.78	9.77	39.55	56.00	-16.45	QP
8	1.3980	19.20	9.77	28.97	46.00	-17.03	AVG
9	3.6580	26.67	10.05	36.72	56.00	-19.28	QP
10	3.6580	16.20	10.05	26.25	46.00	-19.75	AVG
11	20.4020	32.21	10.91	43.12	60.00	-16.88	QP
12	20.4020	22.60	10.91	33.51	50.00	-16.49	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	USB CABLE:Luxshare+Adapter:Huntkey Battery:SCUD(GY)		
Test Engineer	Trey Chen		

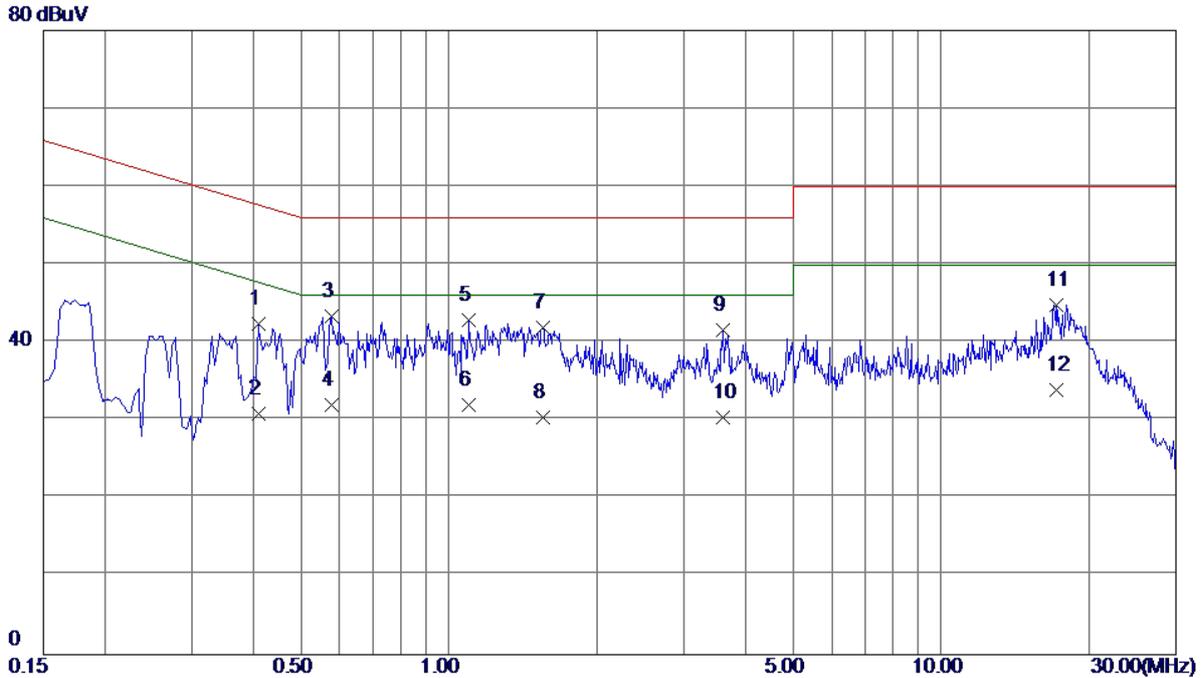


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.4100	32.80	9.59	42.39	57.65	-15.26	QP
2	0.4100	21.25	9.59	30.84	47.65	-16.81	AVG
3 *	0.5780	33.64	9.70	43.34	56.00	-12.66	QP
4	0.5780	22.34	9.70	32.04	46.00	-13.96	AVG
5	1.0940	33.06	9.85	42.91	56.00	-13.09	QP
6	1.0940	22.12	9.85	31.97	46.00	-14.03	AVG
7	1.5500	31.91	9.98	41.89	56.00	-14.11	QP
8	1.5500	20.36	9.98	30.34	46.00	-15.66	AVG
9	3.6100	31.32	10.34	41.66	56.00	-14.34	QP
10	3.6100	20.13	10.34	30.47	46.00	-15.53	AVG
11	17.1660	34.09	10.74	44.83	60.00	-15.17	QP
12	17.1660	23.25	10.74	33.99	50.00	-16.01	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	USB CABLE:Luxshare+Adapter:Huntkey Battery:SCUD(GY)		
Test Engineer	Trey Chen		

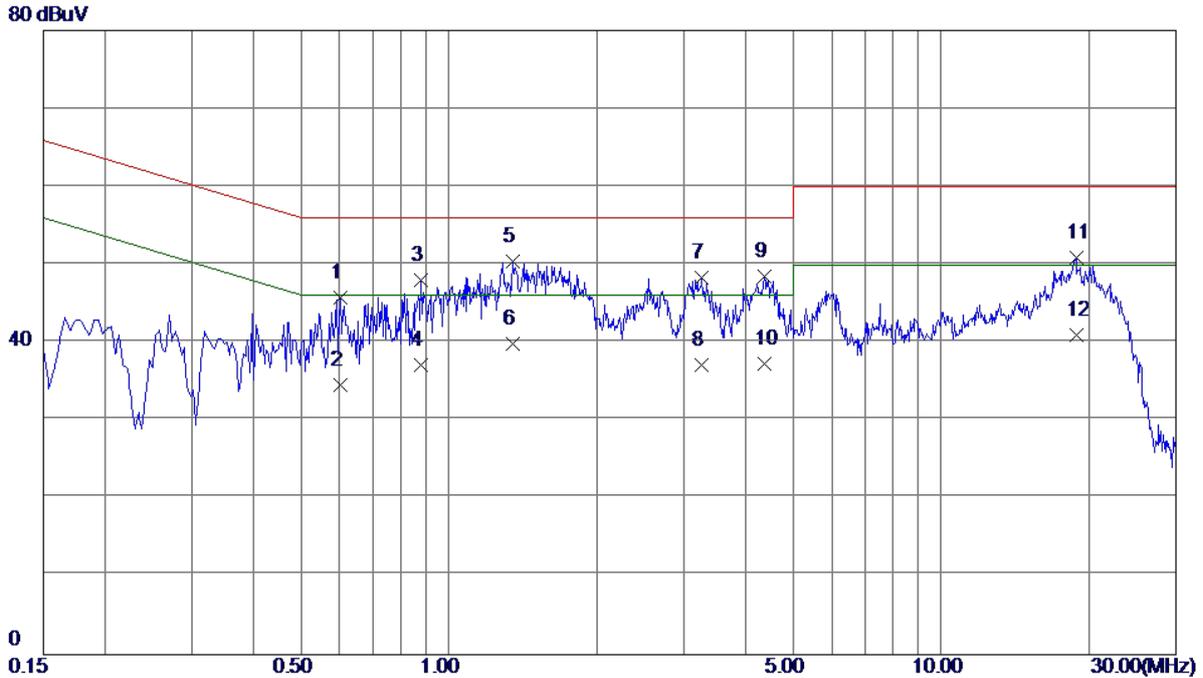


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.6020	36.22	9.50	45.72	56.00	-10.28	QP
2	0.6020	25.12	9.50	34.62	46.00	-11.38	AVG
3	0.8780	38.26	9.71	47.97	56.00	-8.03	QP
4	0.8780	27.34	9.71	37.05	46.00	-8.95	AVG
5 *	1.3500	40.67	9.76	50.43	56.00	-5.57	QP
6	1.3500	30.12	9.76	39.88	46.00	-6.12	AVG
7	3.2659	38.34	9.99	48.33	56.00	-7.67	QP
8	3.2659	27.13	9.99	37.12	46.00	-8.88	AVG
9	4.3700	38.28	10.15	48.43	56.00	-7.57	QP
10	4.3700	27.15	10.15	37.30	46.00	-8.70	AVG
11	18.8140	40.06	10.85	50.91	60.00	-9.09	QP
12	18.8140	30.13	10.85	40.98	50.00	-9.02	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	USB CABLE:Luxshare+Adapter:Huntkey Battery:SCUD(LG)		
Test Engineer	Trey Chen		

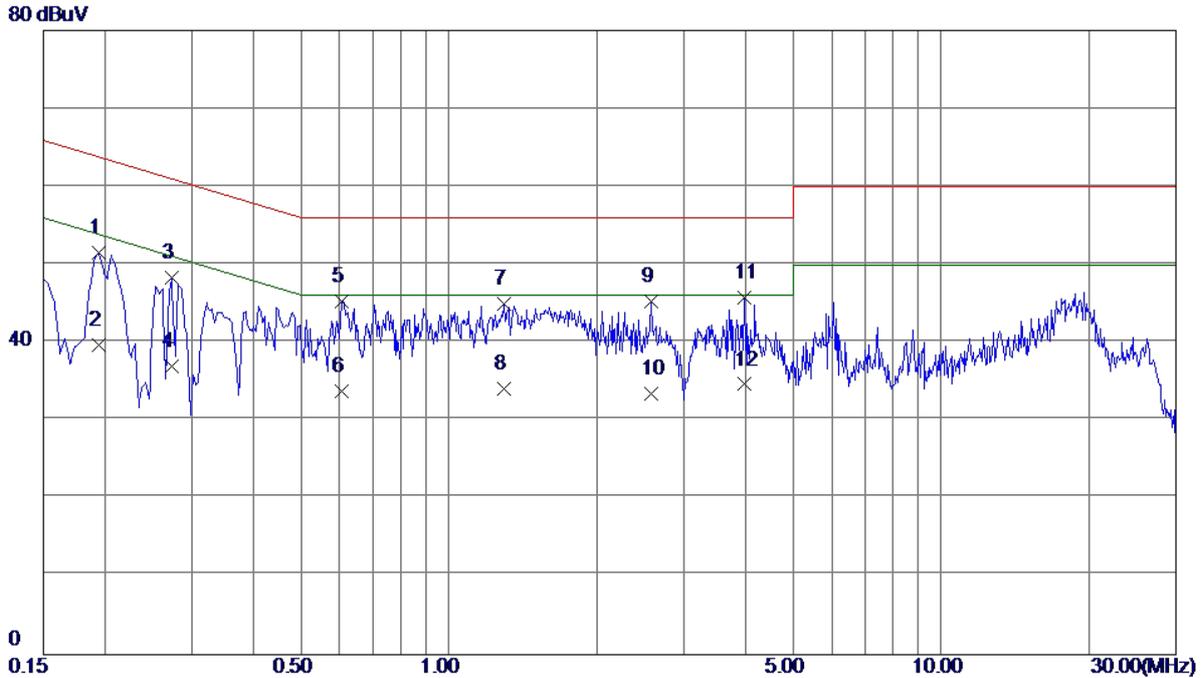


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1940	41.97	9.57	51.54	63.86	-12.32	QP
2	0.1940	30.12	9.57	39.69	53.86	-14.17	AVG
3	0.2740	38.81	9.57	48.38	61.00	-12.62	QP
4	0.2740	27.36	9.57	36.93	51.00	-14.07	AVG
5	0.6060	35.62	9.70	45.32	56.00	-10.68	QP
6	0.6060	24.12	9.70	33.82	46.00	-12.18	AVG
7	1.2940	35.02	9.89	44.91	56.00	-11.09	QP
8	1.2940	24.15	9.89	34.04	46.00	-11.96	AVG
9	2.5740	34.98	10.24	45.22	56.00	-10.78	QP
10	2.5740	23.23	10.24	33.47	46.00	-12.53	AVG
11 *	3.9740	35.35	10.39	45.74	56.00	-10.26	QP
12	3.9740	24.25	10.39	34.64	46.00	-11.36	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	USB CABLE:Luxshare+Adapter:Huntkey Battery:SCUD(LG)		
Test Engineer	Trey Chen		

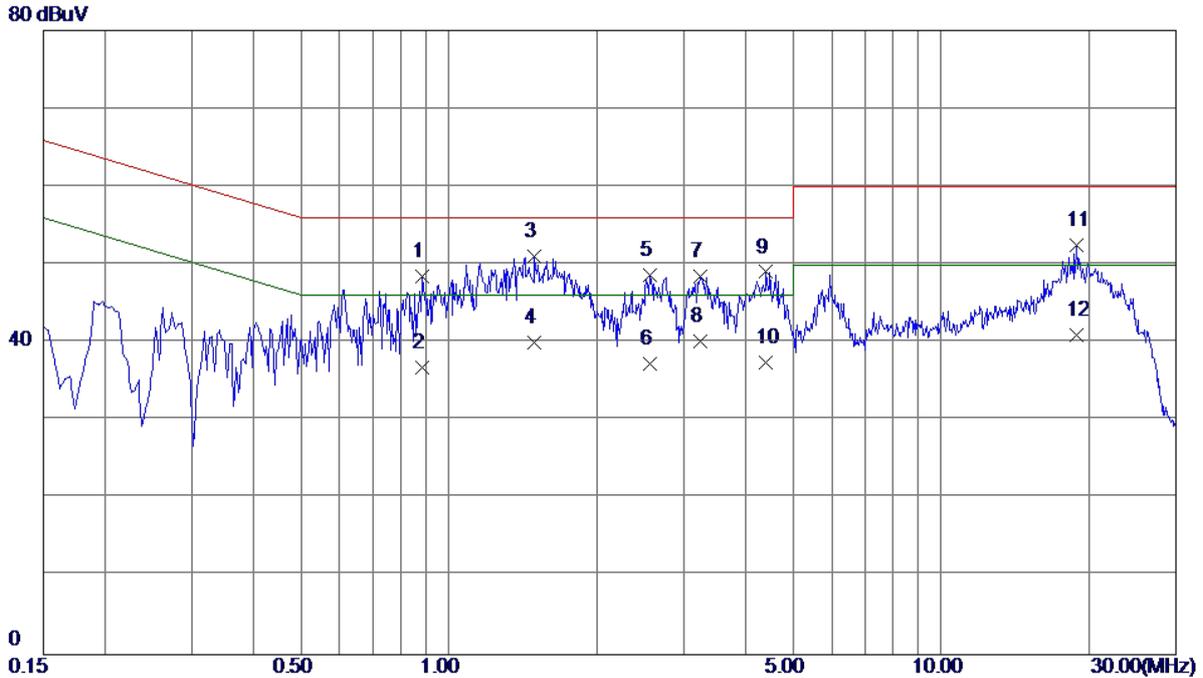


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.8820	38.71	9.71	48.42	56.00	-7.58	QP
2	0.8820	27.12	9.71	36.83	46.00	-9.17	AVG
3 *	1.4900	41.31	9.77	51.08	56.00	-4.92	QP
4	1.4900	30.23	9.77	40.00	46.00	-6.00	AVG
5	2.5540	38.70	9.94	48.64	56.00	-7.36	QP
6	2.5540	27.36	9.94	37.30	46.00	-8.70	AVG
7	3.2380	38.54	9.99	48.53	56.00	-7.47	QP
8	3.2380	30.12	9.99	40.11	46.00	-5.89	AVG
9	4.4140	38.89	10.15	49.04	56.00	-6.96	QP
10	4.4140	27.23	10.15	37.38	46.00	-8.62	AVG
11	18.8220	41.63	10.85	52.48	60.00	-7.52	QP
12	18.8220	30.13	10.85	40.98	50.00	-9.02	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY		
Test Engineer	Trey Chen		

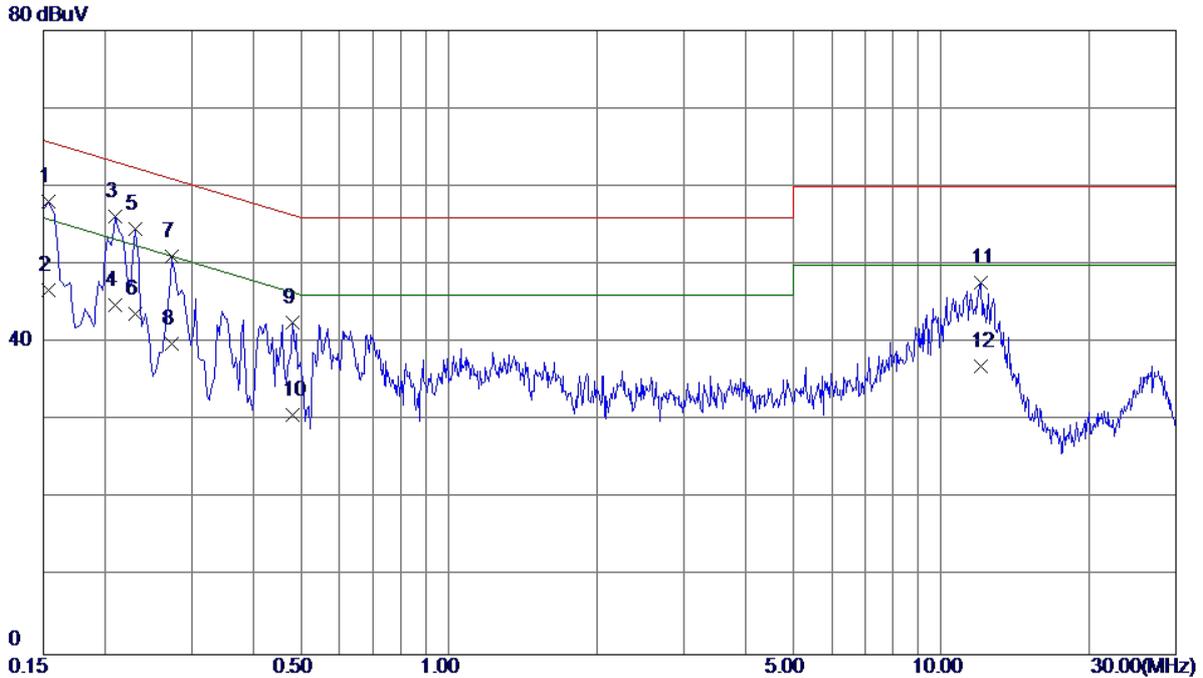


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	48.58	9.57	58.15	65.79	-7.64	QP
2	0.1539	37.12	9.57	46.69	55.79	-9.10	AVG
3 *	0.2100	46.59	9.57	56.16	63.21	-7.05	QP
4	0.2100	35.25	9.57	44.82	53.21	-8.39	AVG
5	0.2300	45.01	9.57	54.58	62.45	-7.87	QP
6	0.2300	34.12	9.57	43.69	52.45	-8.76	AVG
7	0.2740	41.40	9.57	50.97	61.00	-10.03	QP
8	0.2740	30.23	9.57	39.80	51.00	-11.20	AVG
9	0.4820	32.84	9.67	42.51	56.30	-13.79	QP
10	0.4820	21.00	9.67	30.67	46.30	-15.63	AVG
11	12.0260	37.05	10.57	47.62	60.00	-12.38	QP
12	12.0260	26.34	10.57	36.91	50.00	-13.09	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY		
Test Engineer	Trey Chen		

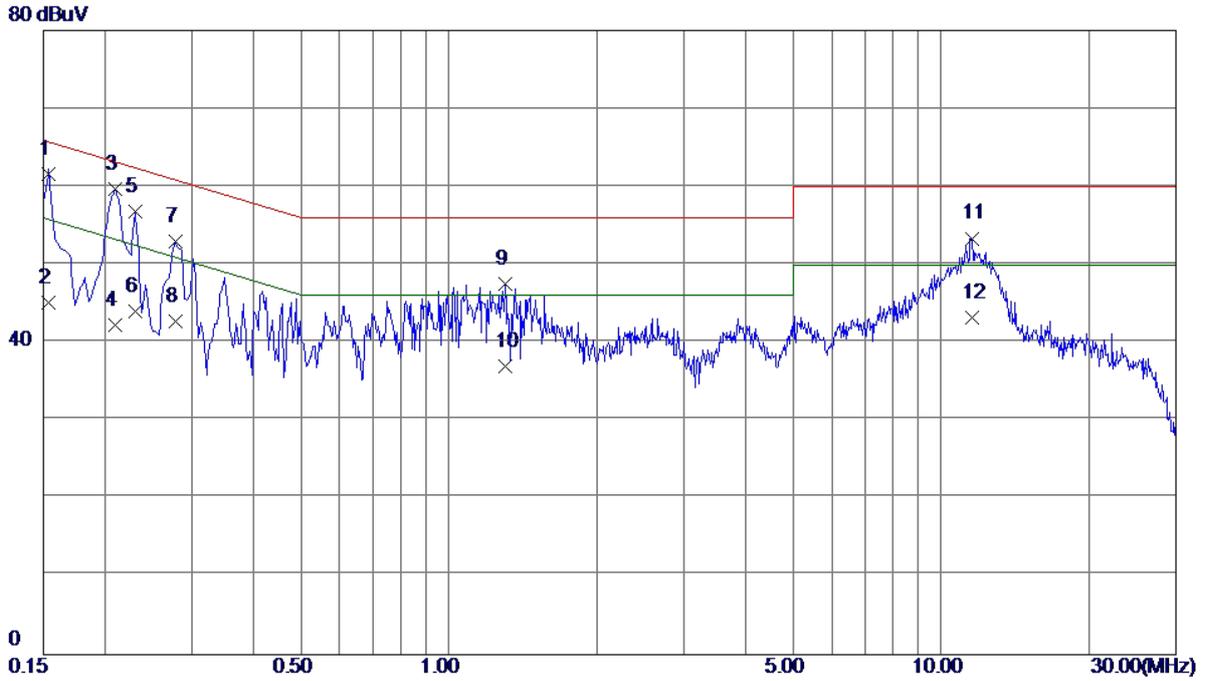


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	52.00	9.55	61.55	65.79	-4.24	QP
2	0.1539	35.60	9.55	45.15	55.79	-10.64	AVG
3 *	0.2100	50.10	9.57	59.67	63.21	-3.54	QP
4	0.2100	32.60	9.57	42.17	53.21	-11.04	AVG
5	0.2300	47.27	9.57	56.84	62.45	-5.61	QP
6	0.2300	34.50	9.57	44.07	52.45	-8.38	AVG
7	0.2779	43.31	9.58	52.89	60.88	-7.99	QP
8	0.2779	33.20	9.58	42.78	50.88	-8.10	AVG
9	1.2980	37.79	9.76	47.55	56.00	-8.45	QP
10	1.2980	27.20	9.76	36.96	46.00	-9.04	AVG
11	11.5300	42.74	10.62	53.36	60.00	-6.64	QP
12	11.5300	32.60	10.62	43.22	50.00	-6.78	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Speaker		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY		
Test Engineer	Trey Chen		

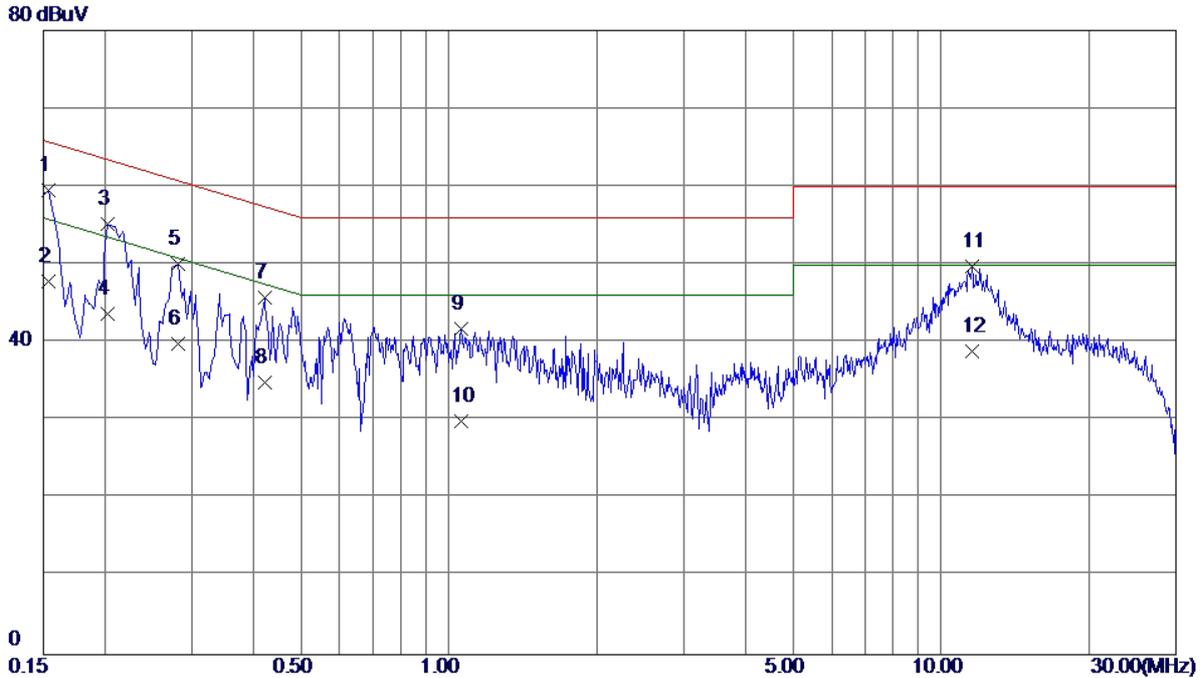


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1539	49.90	9.57	59.47	65.79	-6.32	QP
2	0.1539	38.23	9.57	47.80	55.79	-7.99	AVG
3	0.2020	45.66	9.57	55.23	63.53	-8.30	QP
4	0.2020	34.12	9.57	43.69	53.53	-9.84	AVG
5	0.2819	40.45	9.58	50.03	60.76	-10.73	QP
6	0.2819	30.25	9.58	39.83	50.76	-10.93	AVG
7	0.4220	36.18	9.61	45.79	57.41	-11.62	QP
8	0.4220	25.33	9.61	34.94	47.41	-12.47	AVG
9	1.0620	31.93	9.84	41.77	56.00	-14.23	QP
10	1.0620	20.12	9.84	29.96	46.00	-16.04	AVG
11	11.5340	39.25	10.55	49.80	60.00	-10.20	QP
12	11.5340	28.34	10.55	38.89	50.00	-11.11	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Speaker		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY		
Test Engineer	Trey Chen		

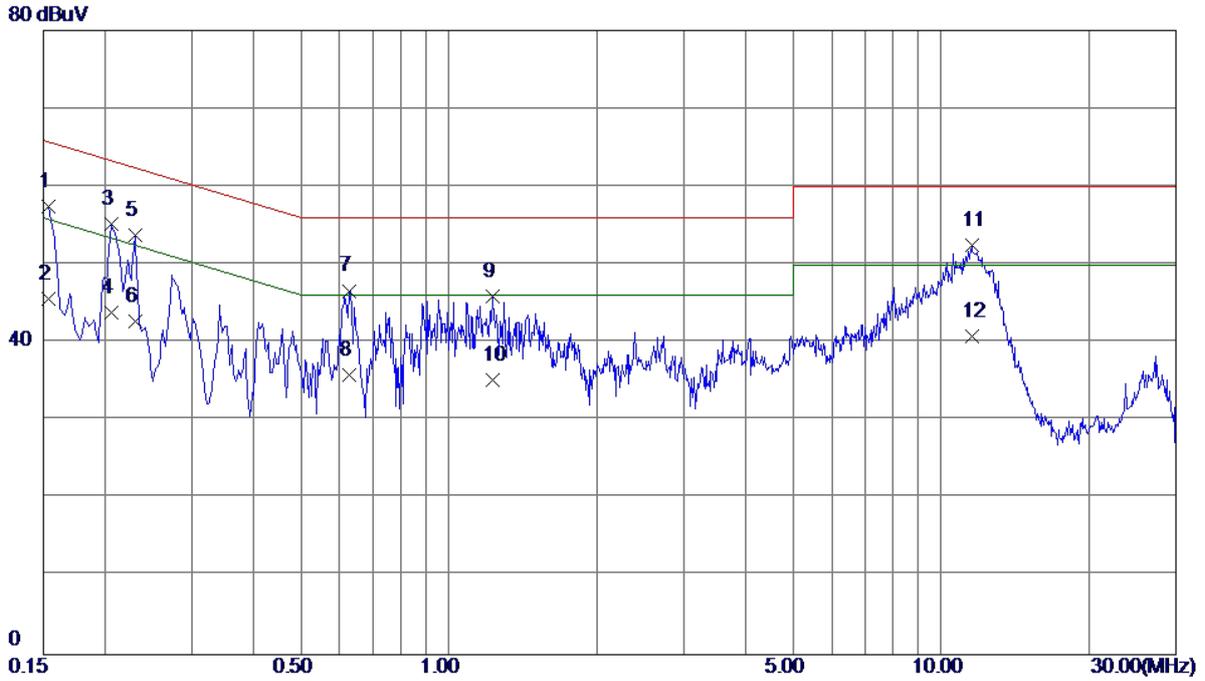


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	47.92	9.55	57.47	65.79	-8.32	QP
2	0.1539	36.12	9.55	45.67	55.79	-10.12	AVG
3	0.2060	45.57	9.57	55.14	63.37	-8.23	QP
4	0.2060	34.25	9.57	43.82	53.37	-9.55	AVG
5	0.2300	44.15	9.57	53.72	62.45	-8.73	QP
6	0.2300	33.12	9.57	42.69	52.45	-9.76	AVG
7	0.6260	37.14	9.50	46.64	56.00	-9.36	QP
8	0.6260	26.34	9.50	35.84	46.00	-10.16	AVG
9	1.2260	36.20	9.76	45.96	56.00	-10.04	QP
10	1.2260	25.38	9.76	35.14	46.00	-10.86	AVG
11 *	11.5300	41.81	10.62	52.43	60.00	-7.57	QP
12	11.5300	30.12	10.62	40.74	50.00	-9.26	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY+Earphone:Quancheng		
Test Engineer	Trey Chen		

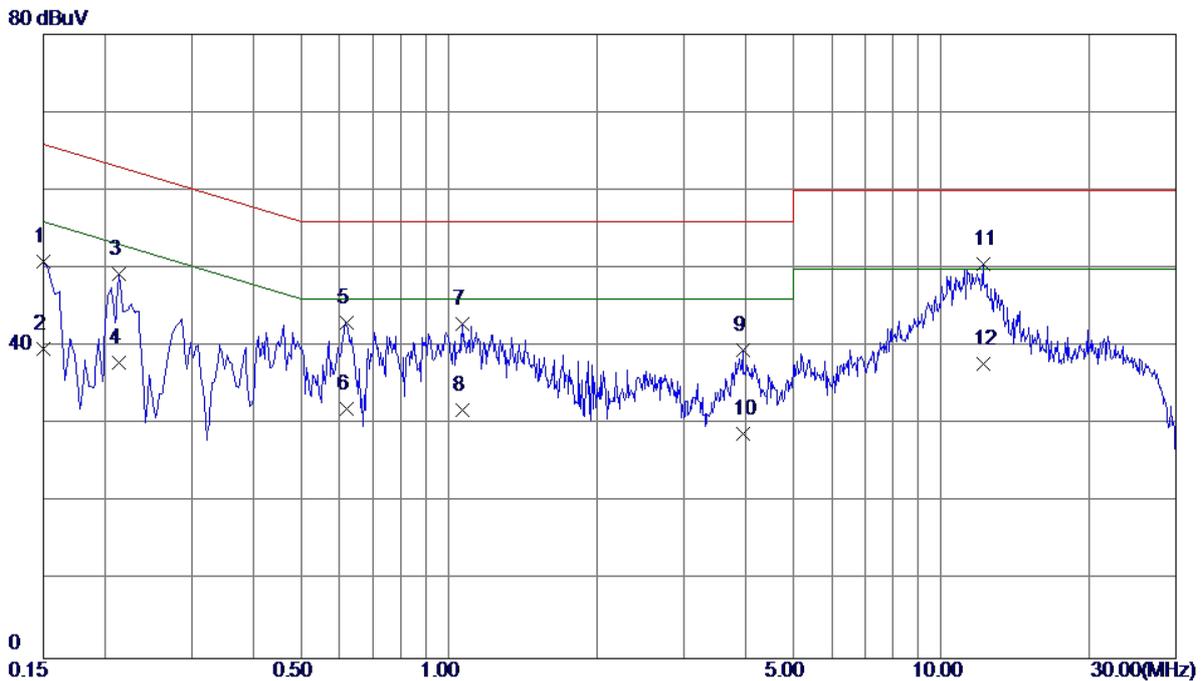


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	41.37	9.57	50.94	66.00	-15.06	QP
2	0.1500	30.12	9.57	39.69	56.00	-16.31	AVG
3	0.2140	39.75	9.57	49.32	63.05	-13.73	QP
4	0.2140	28.34	9.57	37.91	53.05	-15.14	AVG
5	0.6180	33.40	9.70	43.10	56.00	-12.90	QP
6	0.6180	22.25	9.70	31.95	46.00	-14.05	AVG
7	1.0660	33.10	9.84	42.94	56.00	-13.06	QP
8	1.0660	22.00	9.84	31.84	46.00	-14.16	AVG
9	3.9580	29.10	10.38	39.48	56.00	-16.52	QP
10	3.9580	18.37	10.38	28.75	46.00	-17.25	AVG
11 *	12.1700	39.98	10.58	50.56	60.00	-9.44	QP
12	12.1700	27.12	10.58	37.70	50.00	-12.30	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY+Earphone:Quancheng		
Test Engineer	Trey Chen		

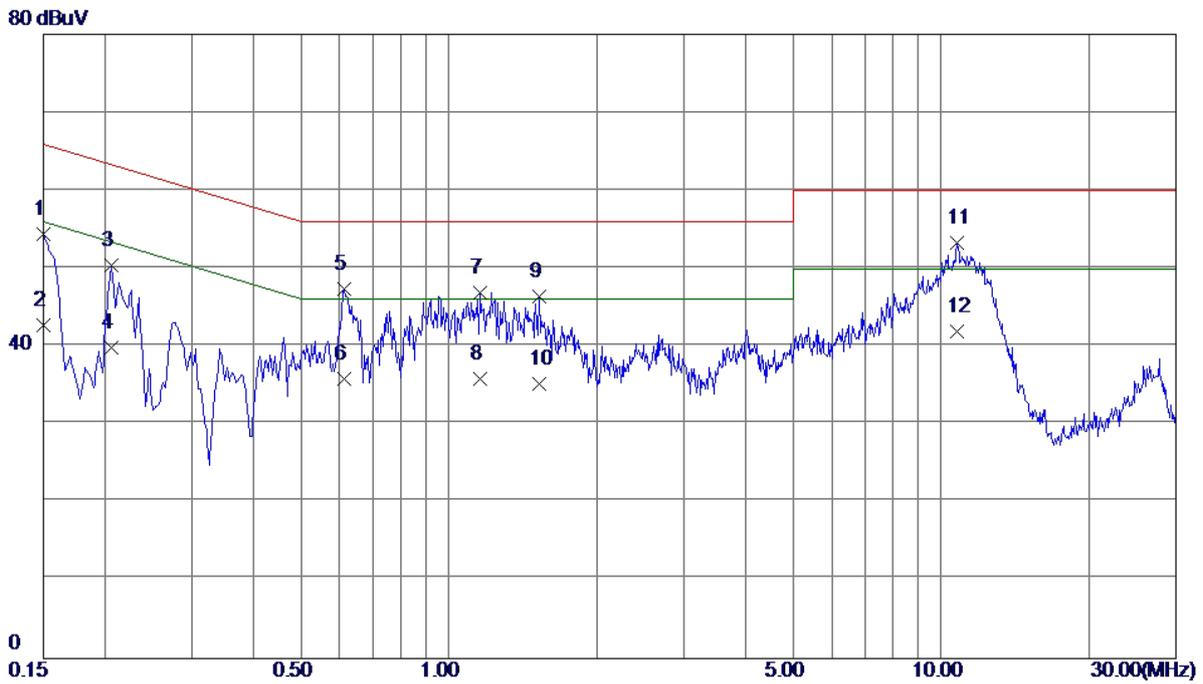


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	44.78	9.57	54.35	66.00	-11.65	QP
2	0.1500	33.12	9.57	42.69	56.00	-13.31	AVG
3	0.2060	40.84	9.57	50.41	63.37	-12.96	QP
4	0.2060	30.25	9.57	39.82	53.37	-13.55	AVG
5	0.6140	37.87	9.50	47.37	56.00	-8.63	QP
6	0.6140	26.36	9.50	35.86	46.00	-10.14	AVG
7	1.1580	37.18	9.75	46.93	56.00	-9.07	QP
8	1.1580	26.14	9.75	35.89	46.00	-10.11	AVG
9	1.5260	36.63	9.78	46.41	56.00	-9.59	QP
10	1.5260	25.38	9.78	35.16	46.00	-10.84	AVG
11 *	10.7940	42.64	10.61	53.25	60.00	-6.75	QP
12	10.7940	31.25	10.61	41.86	50.00	-8.14	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY+Earphone:Merry		
Test Engineer	Trey Chen		

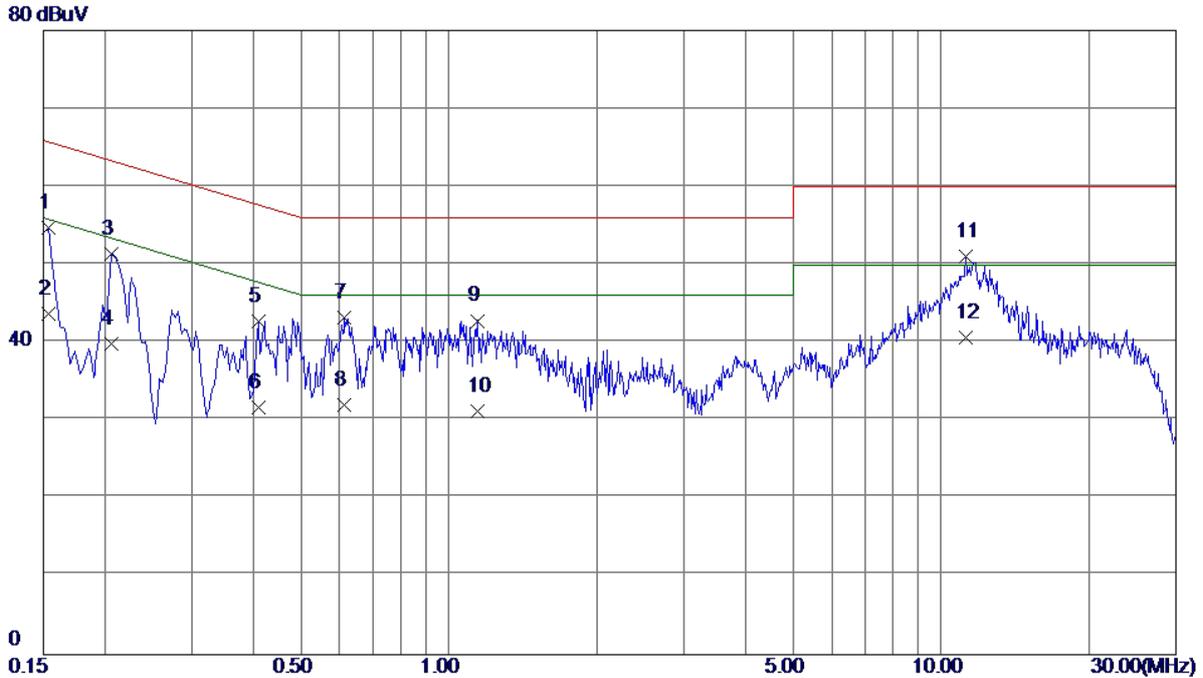


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	45.14	9.57	54.71	65.79	-11.08	QP
2	0.1539	34.12	9.57	43.69	55.79	-12.10	AVG
3	0.2060	41.81	9.57	51.38	63.37	-11.99	QP
4	0.2060	30.25	9.57	39.82	53.37	-13.55	AVG
5	0.4100	33.19	9.59	42.78	57.65	-14.87	QP
6	0.4100	22.14	9.59	31.73	47.65	-15.92	AVG
7	0.6140	33.51	9.70	43.21	56.00	-12.79	QP
8	0.6140	22.34	9.70	32.04	46.00	-13.96	AVG
9	1.1420	32.95	9.85	42.80	56.00	-13.20	QP
10	1.1420	21.28	9.85	31.13	46.00	-14.87	AVG
11 *	11.2299	40.44	10.54	50.98	60.00	-9.02	QP
12	11.2299	30.12	10.54	40.66	50.00	-9.34	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY+Earphone:Merry		
Test Engineer	Trey Chen		

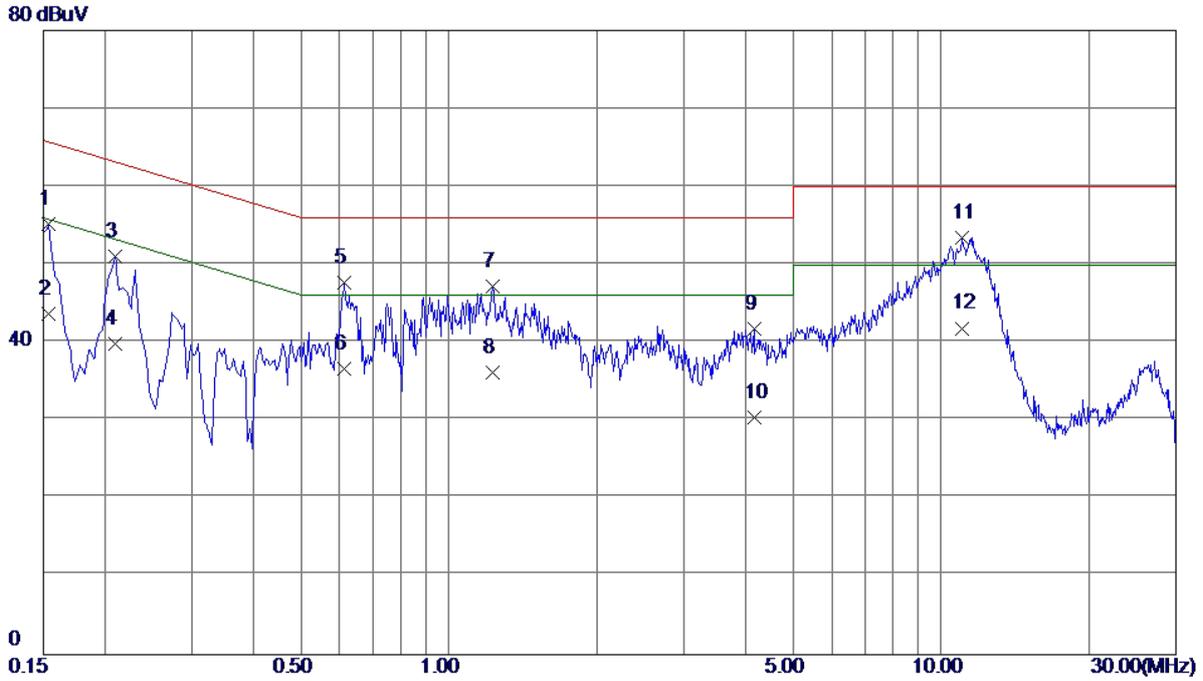


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	45.59	9.55	55.14	65.79	-10.65	QP
2	0.1539	34.12	9.55	43.67	55.79	-12.12	AVG
3	0.2100	41.41	9.57	50.98	63.21	-12.23	QP
4	0.2100	30.25	9.57	39.82	53.21	-13.39	AVG
5	0.6140	38.17	9.50	47.67	56.00	-8.33	QP
6	0.6140	27.12	9.50	36.62	46.00	-9.38	AVG
7	1.2260	37.42	9.76	47.18	56.00	-8.82	QP
8	1.2260	26.34	9.76	36.10	46.00	-9.90	AVG
9	4.1700	31.58	10.12	41.70	56.00	-14.30	QP
10	4.1700	20.25	10.12	30.37	46.00	-15.63	AVG
11 *	11.0380	42.87	10.61	53.48	60.00	-6.52	QP
12	11.0380	31.23	10.61	41.84	50.00	-8.16	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Treyy Chen		

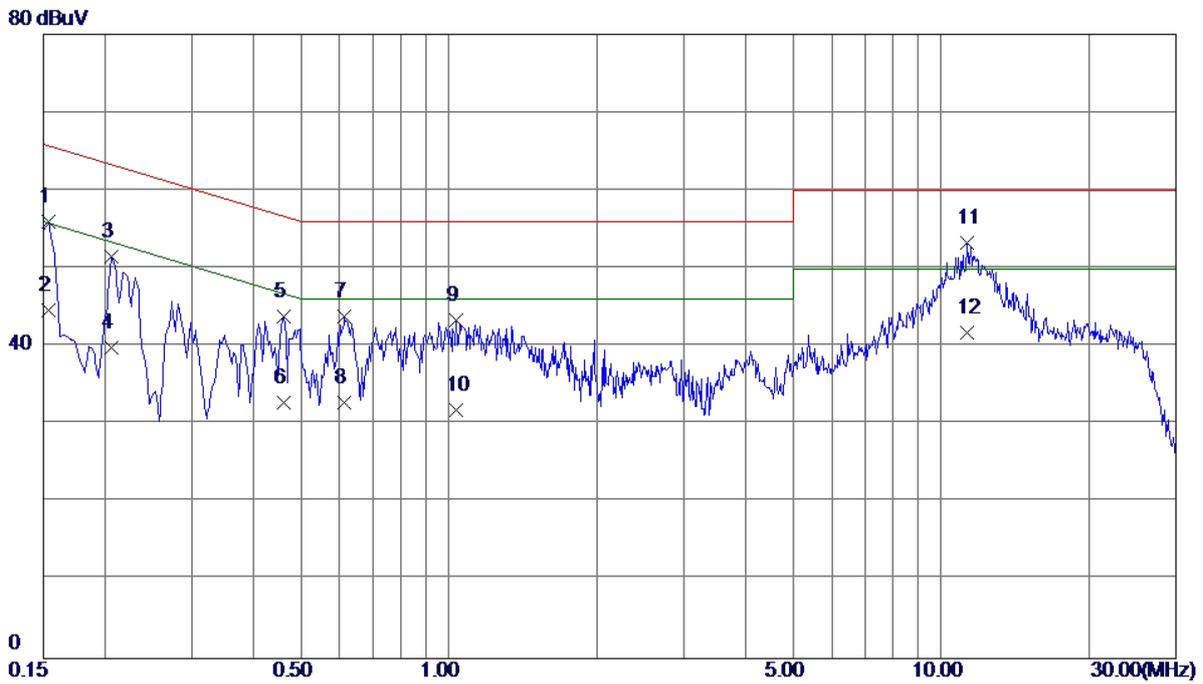


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	46.46	9.57	56.03	65.79	-9.76	QP
2	0.1539	35.12	9.57	44.69	55.79	-11.10	AVG
3	0.2060	41.95	9.57	51.52	63.37	-11.85	QP
4	0.2060	30.25	9.57	39.82	53.37	-13.55	AVG
5	0.4620	34.18	9.65	43.83	56.66	-12.83	QP
6	0.4620	23.14	9.65	32.79	46.66	-13.87	AVG
7	0.6140	34.19	9.70	43.89	56.00	-12.11	QP
8	0.6140	23.12	9.70	32.82	46.00	-13.18	AVG
9	1.0339	33.47	9.84	43.31	56.00	-12.69	QP
10	1.0339	22.00	9.84	31.84	46.00	-14.16	AVG
11 *	11.3139	42.67	10.55	53.22	60.00	-6.78	QP
12	11.3139	31.20	10.55	41.75	50.00	-8.25	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Treyy Chen		

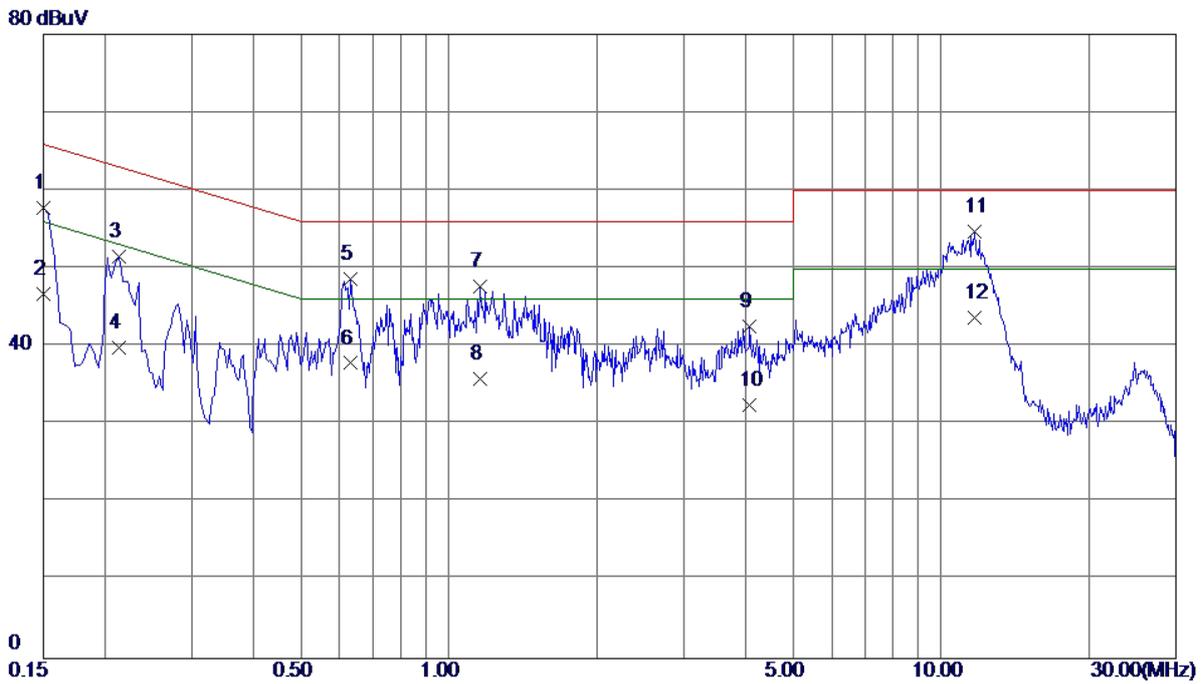


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	48.18	9.57	57.75	66.00	-8.25	QP
2	0.1500	37.12	9.57	46.69	56.00	-9.31	AVG
3	0.2140	41.94	9.57	51.51	63.05	-11.54	QP
4	0.2140	30.25	9.57	39.82	53.05	-13.23	AVG
5	0.6300	39.12	9.50	48.62	56.00	-7.38	QP
6	0.6300	28.34	9.50	37.84	46.00	-8.16	AVG
7	1.1539	37.87	9.75	47.62	56.00	-8.38	QP
8	1.1539	26.12	9.75	35.87	46.00	-10.13	AVG
9	4.0860	32.53	10.10	42.63	56.00	-13.37	QP
10	4.0860	22.34	10.10	32.44	46.00	-13.56	AVG
11 *	11.6980	44.15	10.63	54.78	60.00	-5.22	QP
12	11.6980	33.12	10.63	43.75	50.00	-6.25	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic (GSM)		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY		
Test Engineer	Trey Chen		

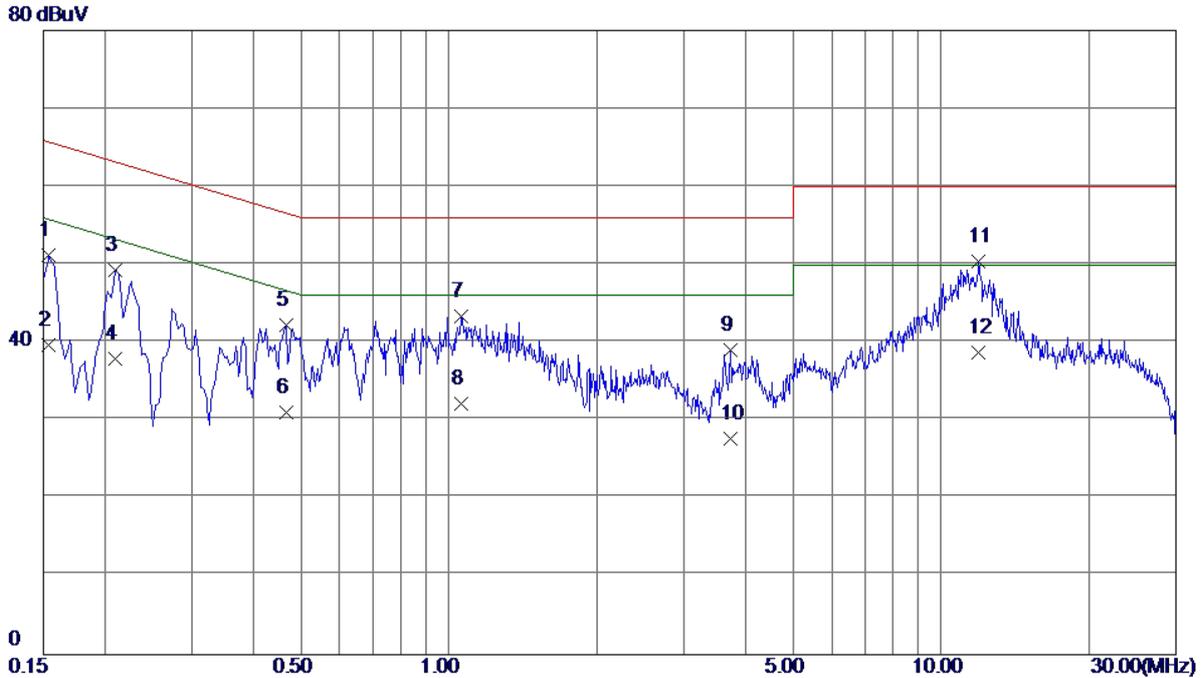


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	41.67	9.57	51.24	65.79	-14.55	QP
2	0.1539	30.12	9.57	39.69	55.79	-16.10	AVG
3	0.2100	39.77	9.57	49.34	63.21	-13.87	QP
4	0.2100	28.34	9.57	37.91	53.21	-15.30	AVG
5	0.4660	32.66	9.65	42.31	56.58	-14.27	QP
6	0.4660	21.37	9.65	31.02	46.58	-15.56	AVG
7	1.0620	33.59	9.84	43.43	56.00	-12.57	QP
8	1.0620	22.34	9.84	32.18	46.00	-13.82	AVG
9	3.7300	28.75	10.35	39.10	56.00	-16.90	QP
10	3.7300	17.37	10.35	27.72	46.00	-18.28	AVG
11 *	11.9340	39.81	10.57	50.38	60.00	-9.62	QP
12	11.9340	28.12	10.57	38.69	50.00	-11.31	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic (GSM)		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY		
Test Engineer	Trey Chen		

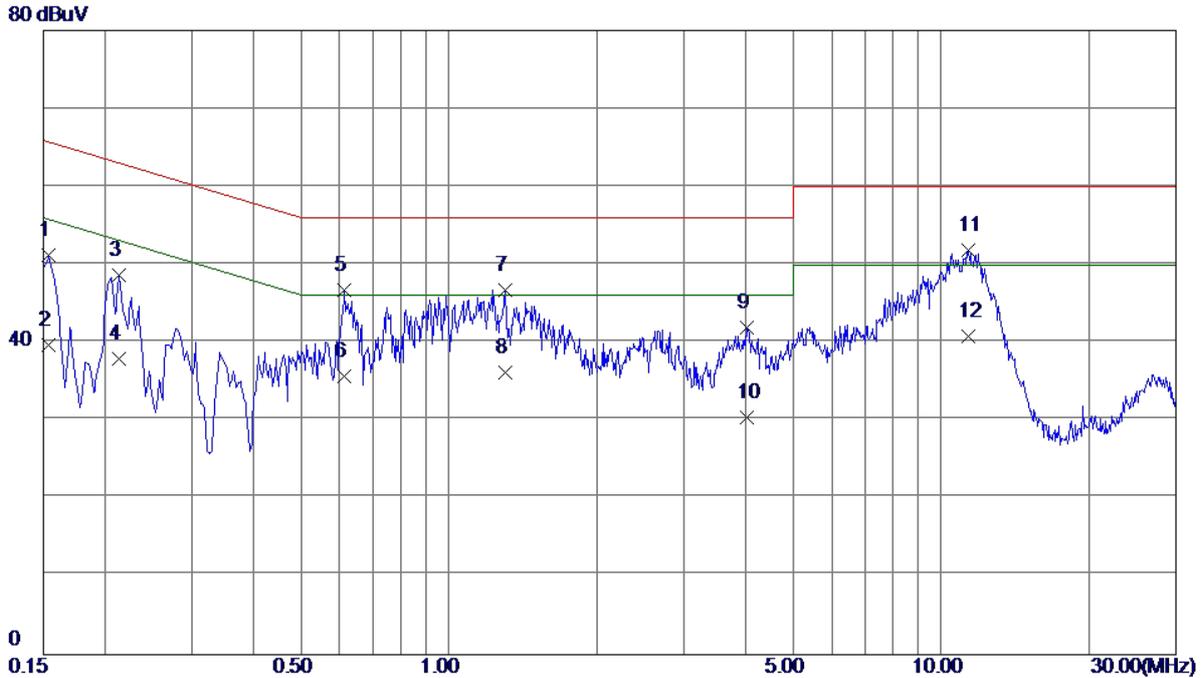


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	41.58	9.55	51.13	65.79	-14.66	QP
2	0.1539	30.14	9.55	39.69	55.79	-16.10	AVG
3	0.2140	39.03	9.57	48.60	63.05	-14.45	QP
4	0.2140	28.34	9.57	37.91	53.05	-15.14	AVG
5	0.6140	37.17	9.50	46.67	56.00	-9.33	QP
6	0.6140	26.12	9.50	35.62	46.00	-10.38	AVG
7	1.2980	37.00	9.76	46.76	56.00	-9.24	QP
8	1.2980	26.38	9.76	36.14	46.00	-9.86	AVG
9	4.0380	31.76	10.10	41.86	56.00	-14.14	QP
10	4.0380	20.33	10.10	30.43	46.00	-15.57	AVG
11 *	11.3620	41.21	10.62	51.83	60.00	-8.17	QP
12	11.3620	30.12	10.62	40.74	50.00	-9.26	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic (WCDMA)		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY		
Test Engineer	Trey Chen		

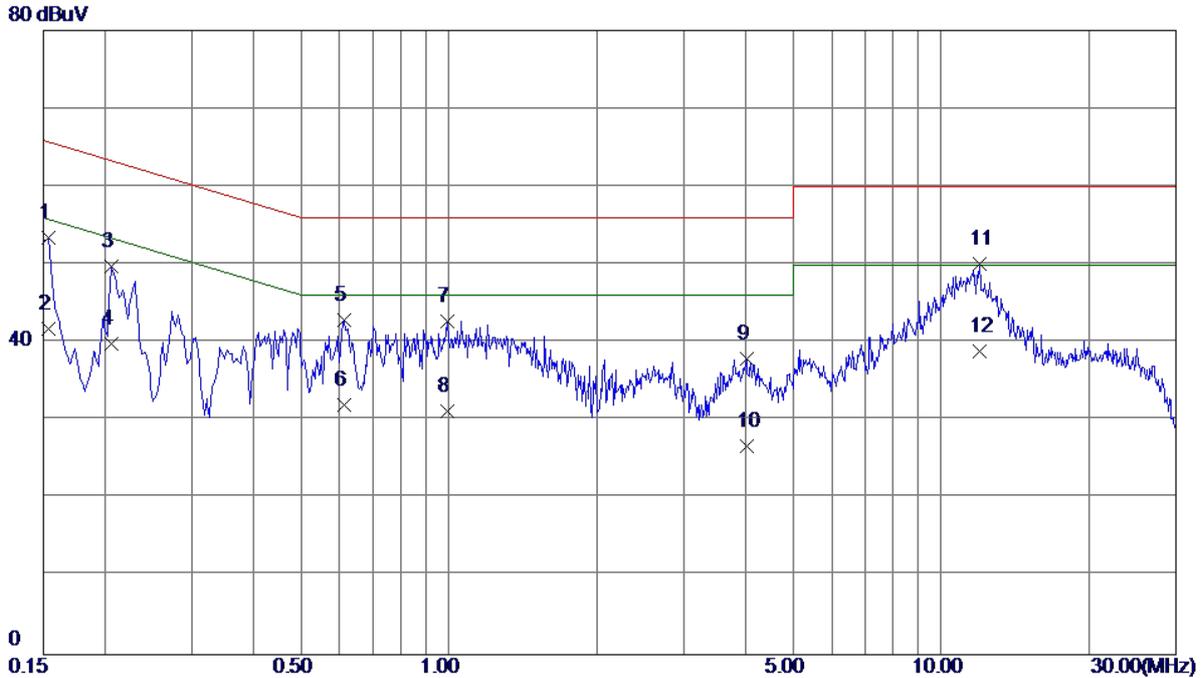


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	43.92	9.57	53.49	65.79	-12.30	QP
2	0.1539	32.14	9.57	41.71	55.79	-14.08	AVG
3	0.2060	40.13	9.57	49.70	63.37	-13.67	QP
4	0.2060	30.25	9.57	39.82	53.37	-13.55	AVG
5	0.6140	33.24	9.70	42.94	56.00	-13.06	QP
6	0.6140	22.36	9.70	32.06	46.00	-13.94	AVG
7	0.9940	32.91	9.84	42.75	56.00	-13.25	QP
8	0.9940	21.36	9.84	31.20	46.00	-14.80	AVG
9	4.0220	27.49	10.39	37.88	56.00	-18.12	QP
10	4.0220	16.34	10.39	26.73	46.00	-19.27	AVG
11 *	11.9860	39.57	10.57	50.14	60.00	-9.86	QP
12	11.9860	28.36	10.57	38.93	50.00	-11.07	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic (WCDMA)		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY		
Test Engineer	Trey Chen		

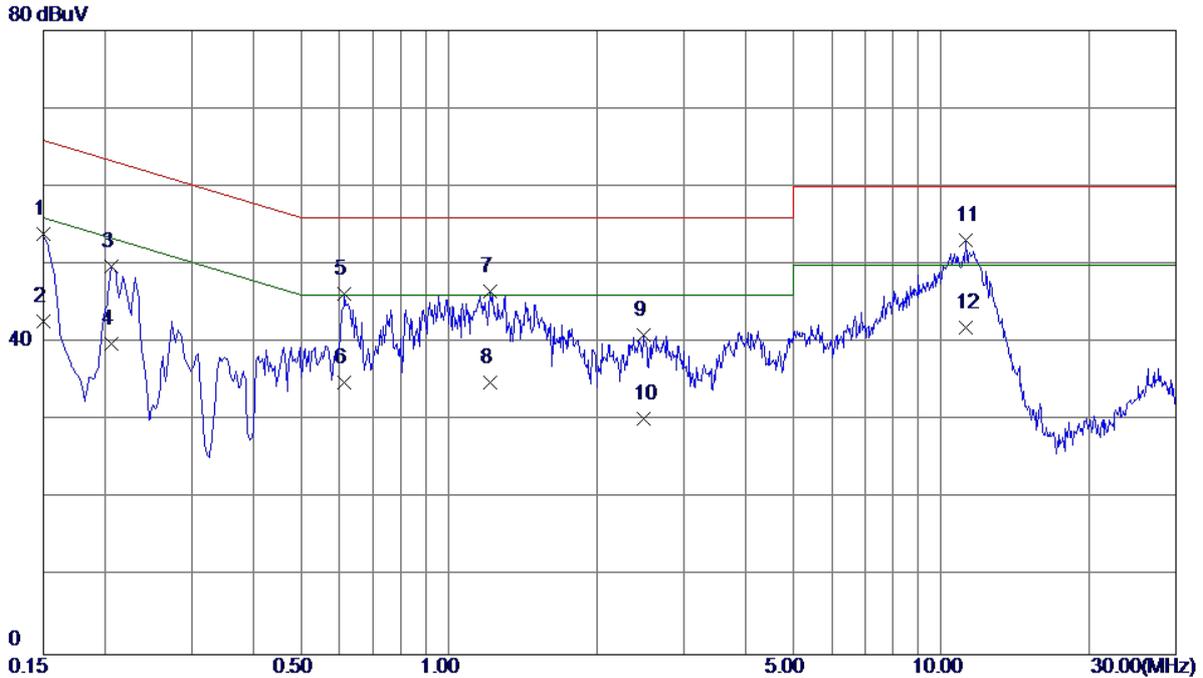


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	44.27	9.57	53.84	66.00	-12.16	QP
2	0.1500	33.14	9.57	42.71	56.00	-13.29	AVG
3	0.2060	40.21	9.57	49.78	63.37	-13.59	QP
4	0.2060	30.25	9.57	39.82	53.37	-13.55	AVG
5	0.6140	36.80	9.50	46.30	56.00	-9.70	QP
6	0.6140	25.34	9.50	34.84	46.00	-11.16	AVG
7	1.2140	36.82	9.75	46.57	56.00	-9.43	QP
8	1.2140	25.12	9.75	34.87	46.00	-11.13	AVG
9	2.4860	31.04	9.93	40.97	56.00	-15.03	QP
10	2.4860	20.34	9.93	30.27	46.00	-15.73	AVG
11 *	11.2540	42.52	10.62	53.14	60.00	-6.86	QP
12	11.2540	31.25	10.62	41.87	50.00	-8.13	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic (LTE)		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY		
Test Engineer	Trey Chen		

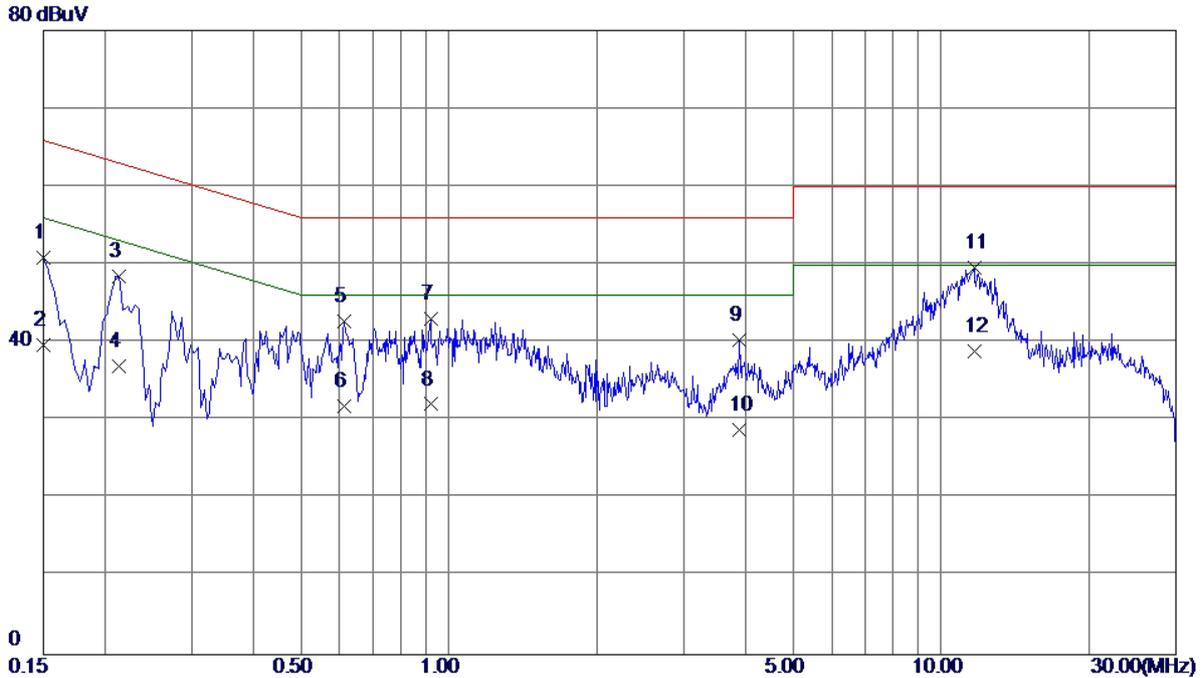

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	41.32	9.57	50.89	66.00	-15.11	QP
2	0.1500	30.14	9.57	39.71	56.00	-16.29	AVG
3	0.2140	38.92	9.57	48.49	63.05	-14.56	QP
4	0.2140	27.34	9.57	36.91	53.05	-16.14	AVG
5	0.6140	33.02	9.70	42.72	56.00	-13.28	QP
6	0.6140	22.12	9.70	31.82	46.00	-14.18	AVG
7	0.9180	33.21	9.83	43.04	56.00	-12.96	QP
8	0.9180	22.25	9.83	32.08	46.00	-13.92	AVG
9	3.8820	29.92	10.37	40.29	56.00	-15.71	QP
10	3.8820	18.37	10.37	28.74	46.00	-17.26	AVG
11 *	11.6660	39.01	10.56	49.57	60.00	-10.43	QP
12	11.6660	28.36	10.56	38.92	50.00	-11.08	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic (LTE)		
Note	USB CABLE:Luxshare+Adapter:Phitek Battery:DESAY		
Test Engineer	Trey Chen		

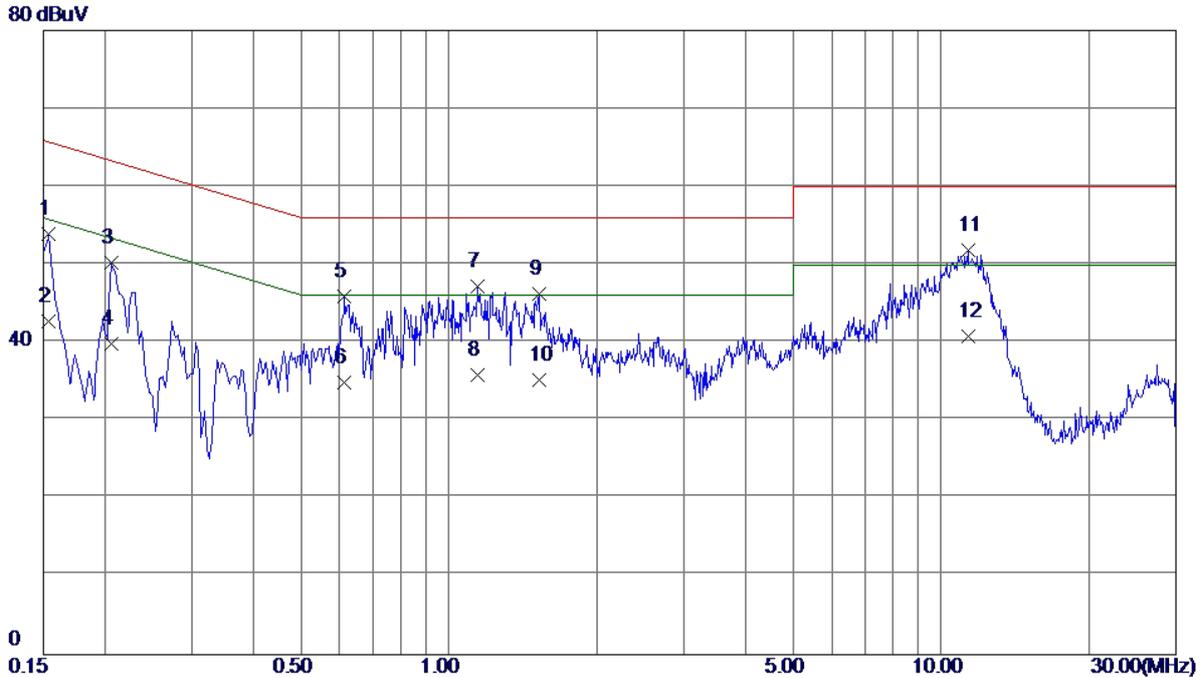

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	44.39	9.55	53.94	65.79	-11.85	QP
2	0.1539	33.12	9.55	42.67	55.79	-13.12	AVG
3	0.2060	40.62	9.57	50.19	63.37	-13.18	QP
4	0.2060	30.25	9.57	39.82	53.37	-13.55	AVG
5	0.6140	36.40	9.50	45.90	56.00	-10.10	QP
6	0.6140	25.34	9.50	34.84	46.00	-11.16	AVG
7	1.1460	37.48	9.75	47.23	56.00	-8.77	QP
8	1.1460	26.12	9.75	35.87	46.00	-10.13	AVG
9	1.5300	36.52	9.78	46.30	56.00	-9.70	QP
10	1.5300	25.36	9.78	35.14	46.00	-10.86	AVG
11 *	11.3700	41.17	10.62	51.79	60.00	-8.21	QP
12	11.3700	30.14	10.62	40.76	50.00	-9.24	AVG

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-0 1	N/A	N/A
2	Amplifier	Agilent	8449B	3008A02274	Mar. 10, 2017
3	Receiver	Agilent	N9038A	MY52130039	Sep. 04, 2017
4	Antenna	EM	EM-6876-1	230	Jul. 08, 2017
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF78020841 6	N/A
7	Cable	emi	EMC104-SM-S M-12000(12m)	N/A	Jul. 06, 2017
8	Double Ridged Guide Antenna	ETS	3115	00075789	Mar. 27, 2017
9	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 23, 2017
10	Microwave Pre-amplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 27, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

4.2.3 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

Note:

For measurement of frequency 1GHz -6000.000GHz, the EUT was set 3 meters away from the receiver antenna.

Emission level (dBuV/m)=20log Emission level (uV/m).

The limits above 26.5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1m

Distance extrapolation factor = 20 log (3m/1m) dB ;


Limit line = specific limits (dBuV) + 9.5 dB.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

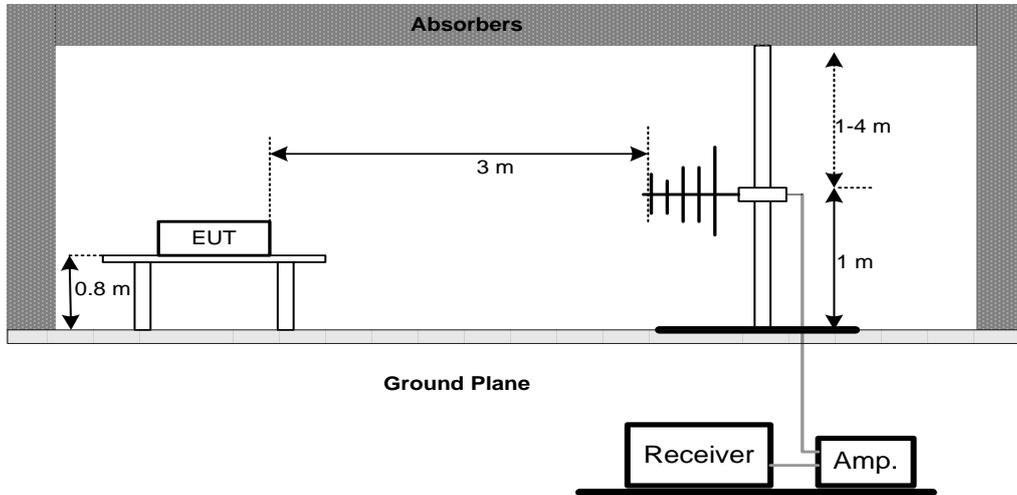

(B) Radiated Emission Test Set-Up Frequency 1 GHz

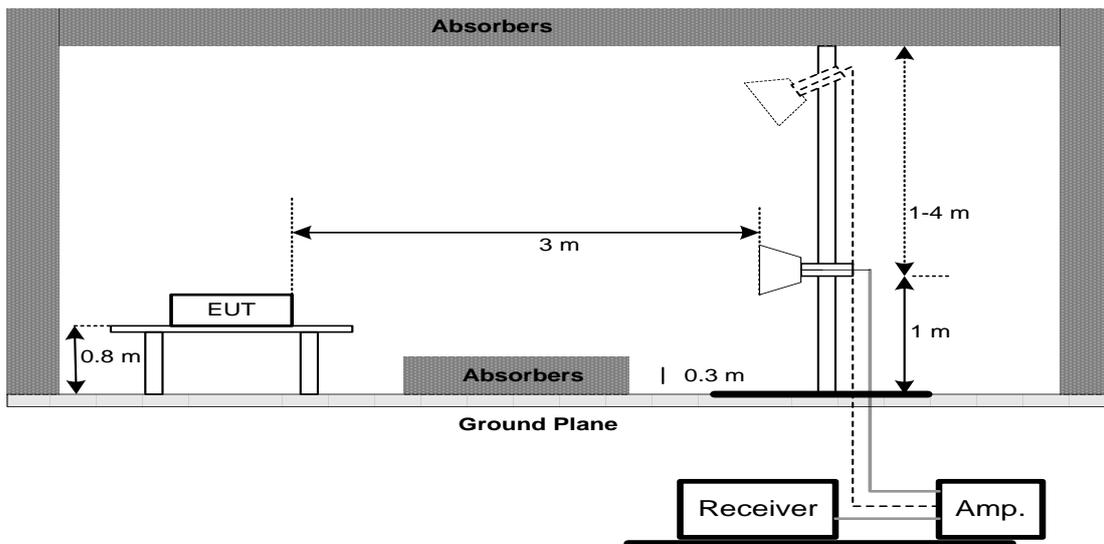

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 unless otherwise a special operating condition is specified in the follows during the testing.


4.2.7 TEST RESULTS-BELOW 1GHZ

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Treyy Chen		


80 dBuV/m

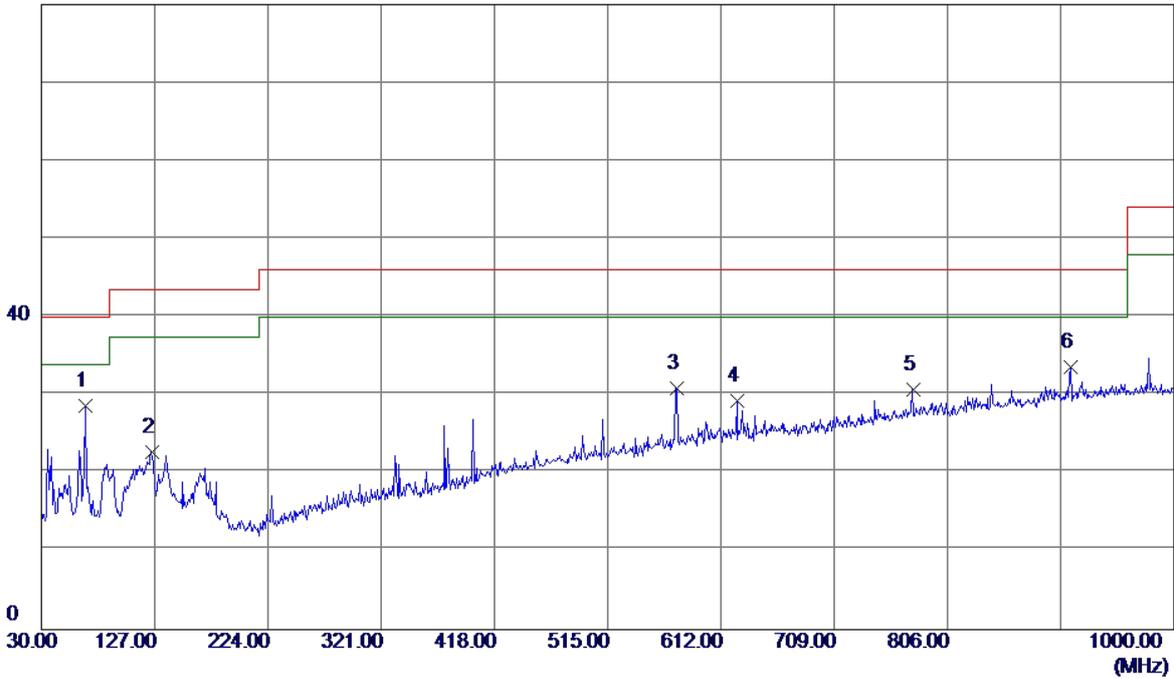

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	67.8300	44.58	-15.88	28.70	40.00	-11.30	QP
2	124.5750	37.68	-14.97	22.71	43.50	-20.79	QP
3	574.1700	37.63	-6.74	30.89	46.00	-15.11	QP
4	625.5800	35.00	-5.69	29.31	46.00	-16.69	QP
5	776.4150	33.38	-2.71	30.67	46.00	-15.33	QP
6	911.7300	33.59	0.07	33.66	46.00	-12.34	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Treyy Chen		


80 dBuV/m

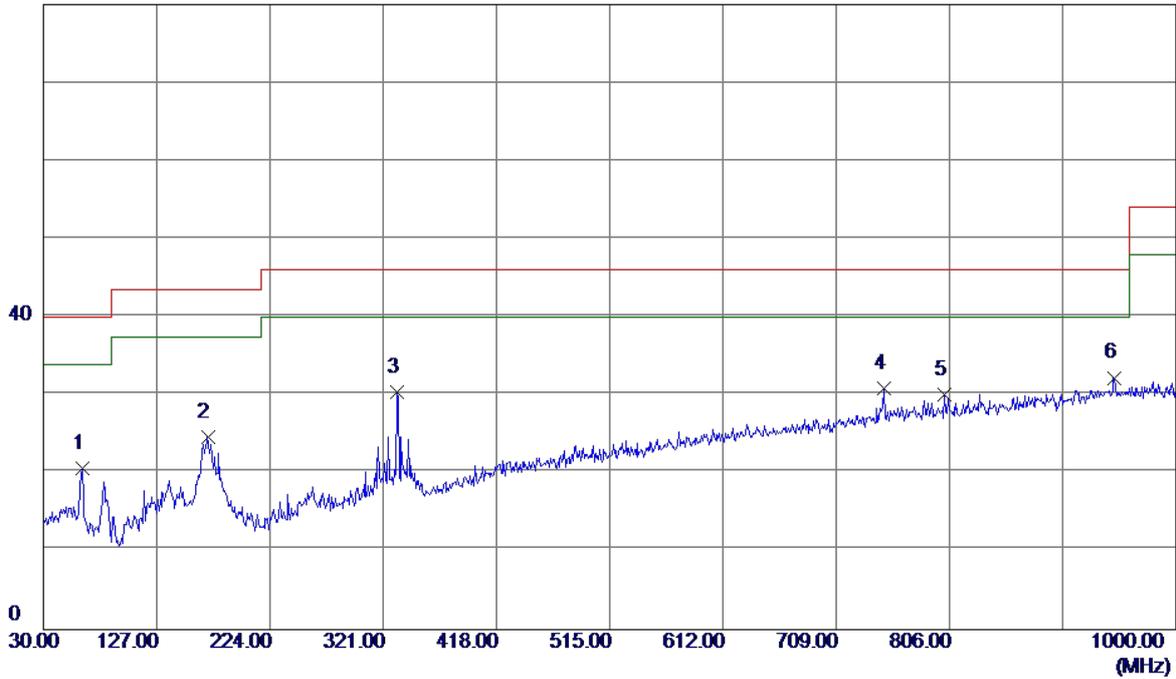

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	62.9800	35.84	-15.25	20.59	40.00	-19.41	QP
2	170.6500	38.21	-13.58	24.63	43.50	-18.87	QP
3	333.1250	41.65	-11.23	30.42	46.00	-15.58	QP
4	749.7400	33.98	-3.13	30.85	46.00	-15.15	QP
5	802.1200	32.35	-2.32	30.03	46.00	-15.97	QP
6 *	947.1350	31.50	0.74	32.24	46.00	-13.76	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB Cable:HONGLIN		
Test Engineer	Treyy Chen		


80 dBuV/m

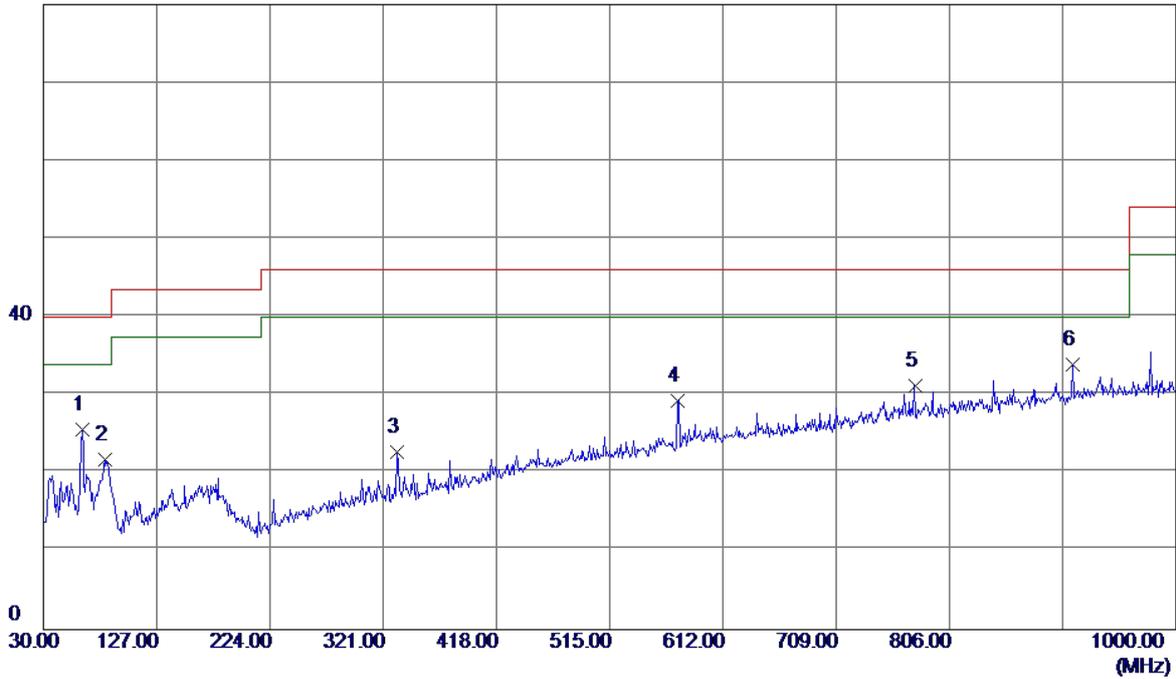

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	63.4650	40.92	-15.31	25.61	40.00	-14.39	QP
2	82.3800	39.80	-18.11	21.69	40.00	-18.31	QP
3	333.1250	33.96	-11.23	22.73	46.00	-23.27	QP
4	573.6850	36.04	-6.75	29.29	46.00	-16.71	QP
5	776.4150	33.91	-2.71	31.20	46.00	-14.80	QP
6 *	911.7300	33.88	0.07	33.95	46.00	-12.05	QP


EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB Cable:HONGLIN		
Test Engineer	Treyy Chen		

80 dBuV/m

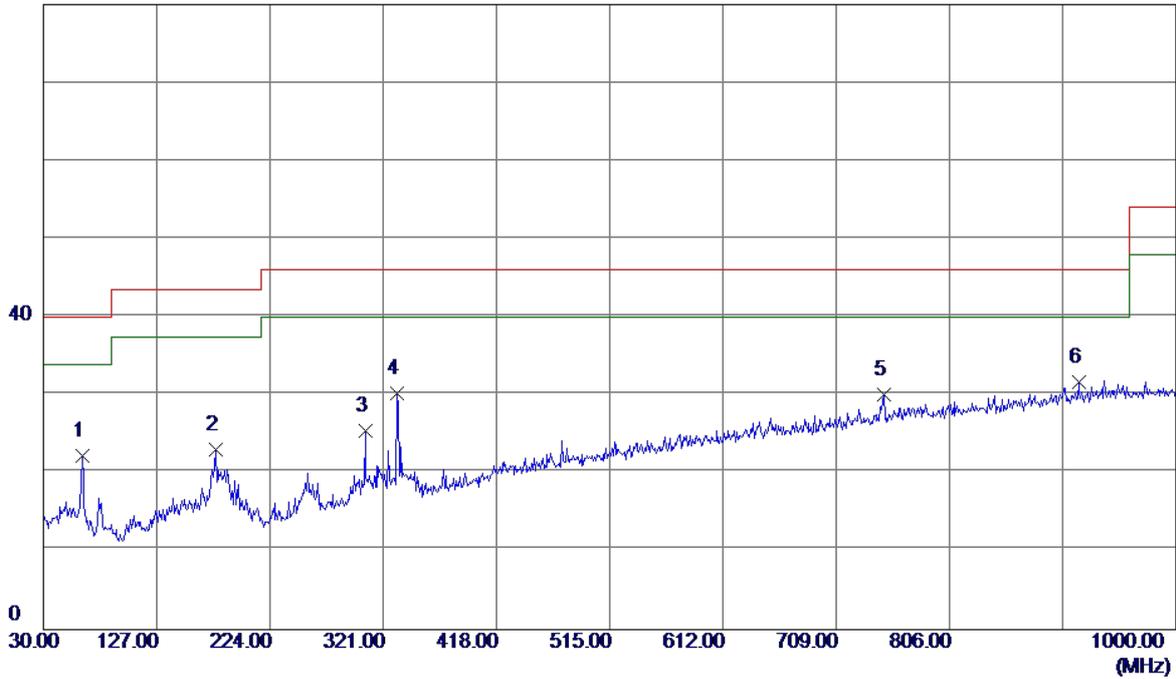

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	63.4650	37.49	-15.31	22.18	40.00	-17.82	QP
2	177.4400	37.38	-14.33	23.05	43.50	-20.45	QP
3	305.9650	37.19	-11.75	25.44	46.00	-20.56	QP
4	333.1250	41.50	-11.23	30.27	46.00	-15.73	QP
5	749.7400	33.26	-3.13	30.13	46.00	-15.87	QP
6 *	917.0650	31.55	0.17	31.72	46.00	-14.28	QP


EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Treyy Chen		

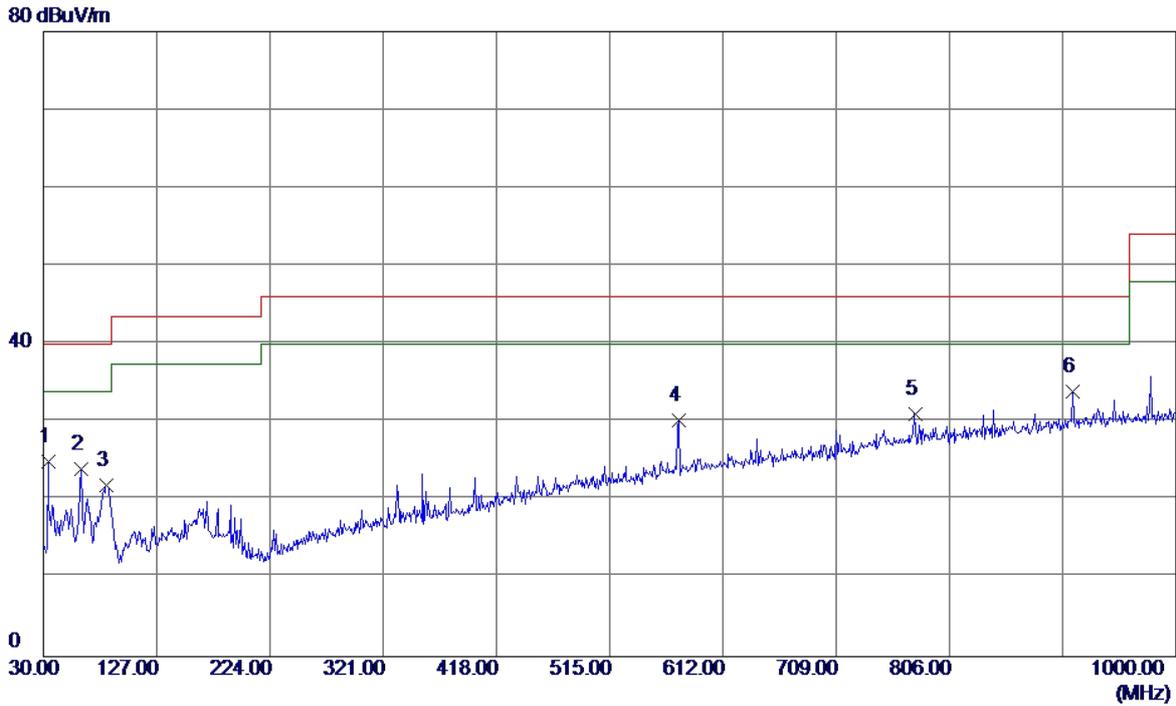

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	34.3650	39.09	-14.09	25.00	40.00	-15.00	QP
2	62.0100	39.13	-15.13	24.00	40.00	-16.00	QP
3	84.3200	40.14	-18.21	21.93	40.00	-18.07	QP
4	574.1700	37.03	-6.74	30.29	46.00	-15.71	QP
5	776.4150	33.69	-2.71	30.98	46.00	-15.02	QP
6 *	911.7300	33.91	0.07	33.98	46.00	-12.02	QP


EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Treyy Chen		

80 dBuV/m

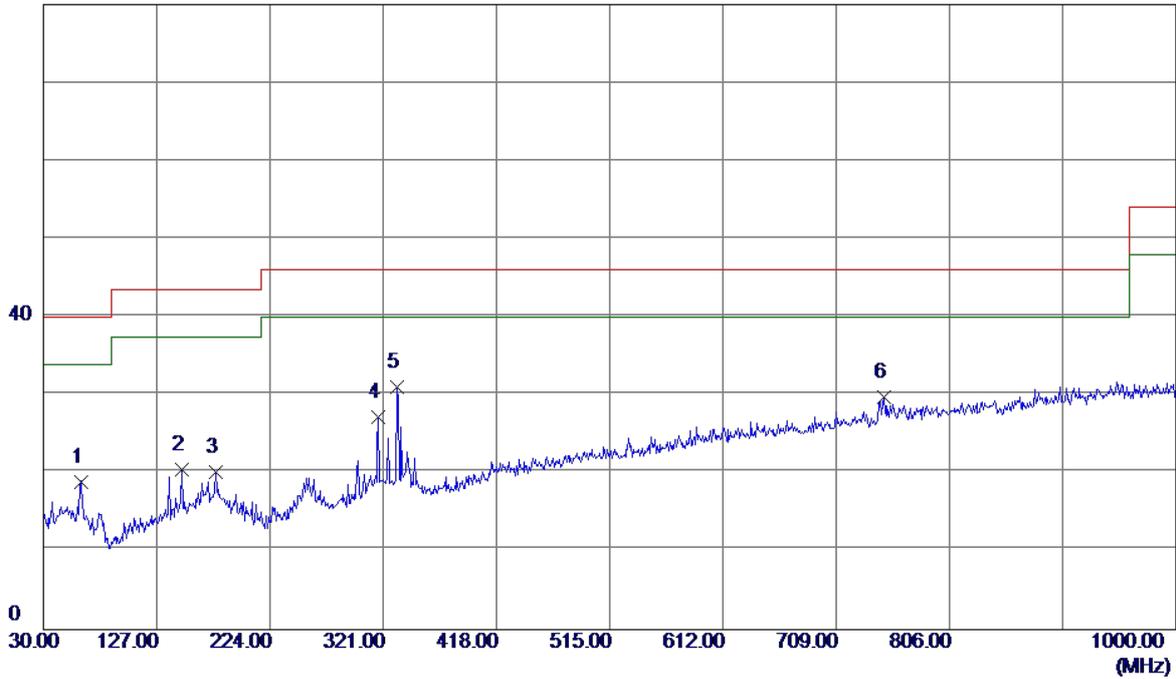

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	62.0100	34.09	-15.13	18.96	40.00	-21.04	QP
2	148.8250	33.31	-12.83	20.48	43.50	-23.02	QP
3	177.4400	34.56	-14.33	20.23	43.50	-23.27	QP
4	317.1200	38.72	-11.54	27.18	46.00	-18.82	QP
5 *	333.1250	42.29	-11.23	31.06	46.00	-14.94	QP
6	749.7400	32.94	-3.13	29.81	46.00	-16.19	QP


EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:BYD+USB Cable:FOXCONN Battery:SUNWODA		
Test Engineer	Treyy Chen		

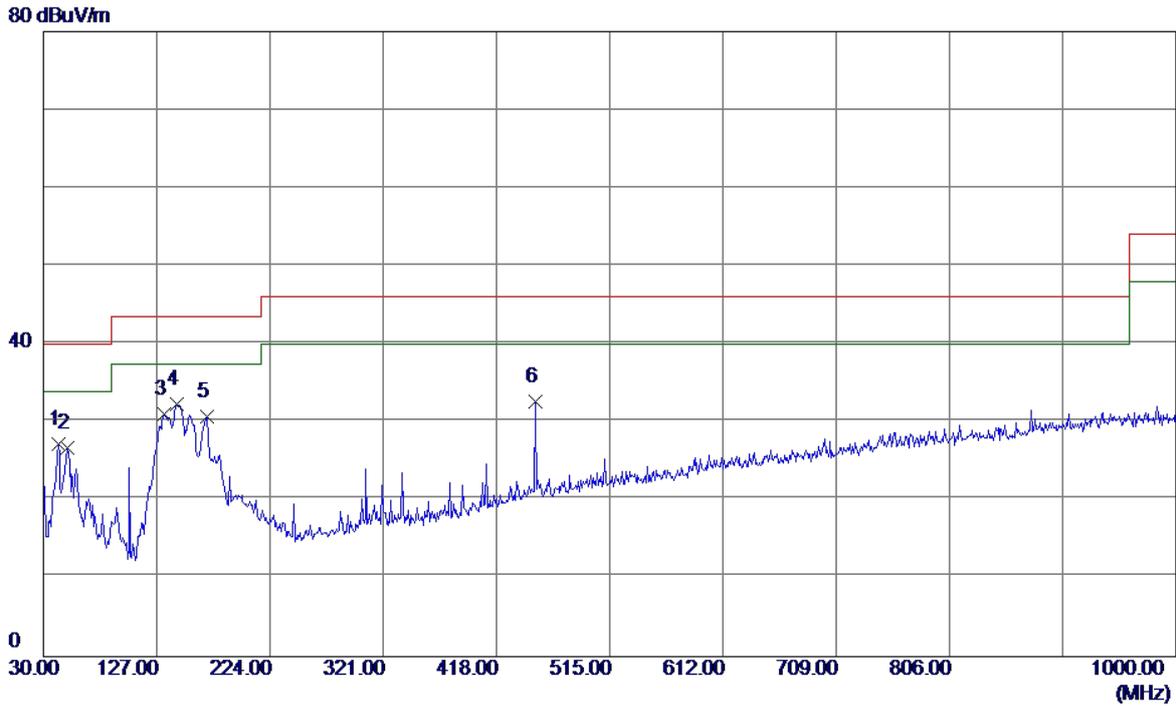

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	42.6100	40.60	-13.37	27.23	40.00	-12.77	QP
2	50.8550	40.48	-13.77	26.71	40.00	-13.29	QP
3	133.7899	44.81	-13.78	31.03	43.50	-12.47	QP
4 *	144.4600	45.29	-13.00	32.29	43.50	-11.21	QP
5	169.6799	44.29	-13.50	30.79	43.50	-12.71	QP
6	451.4650	41.53	-8.95	32.58	46.00	-13.42	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:BYD+USB Cable:FOXCONN Battery:SUNWODA		
Test Engineer	Treyy Chen		


80 dBuV/m

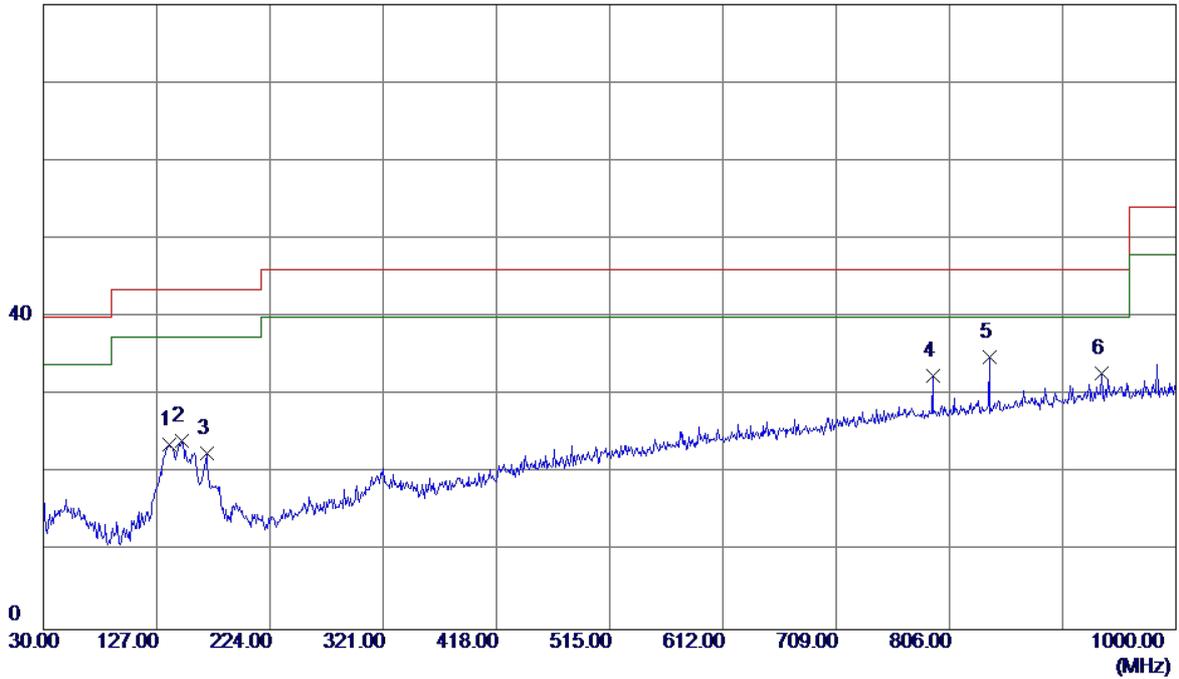

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	138.1550	37.06	-13.35	23.71	43.50	-19.79	QP
2	148.8250	37.04	-12.83	24.21	43.50	-19.29	QP
3	170.1649	36.10	-13.52	22.58	43.50	-20.92	QP
4	791.9350	34.91	-2.47	32.44	46.00	-13.56	QP
5 *	839.9500	36.83	-1.90	34.93	46.00	-11.07	QP
6	935.9800	32.27	0.53	32.80	46.00	-13.20	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(GY)		
Test Engineer	Treyy Chen		


80 dBuV/m

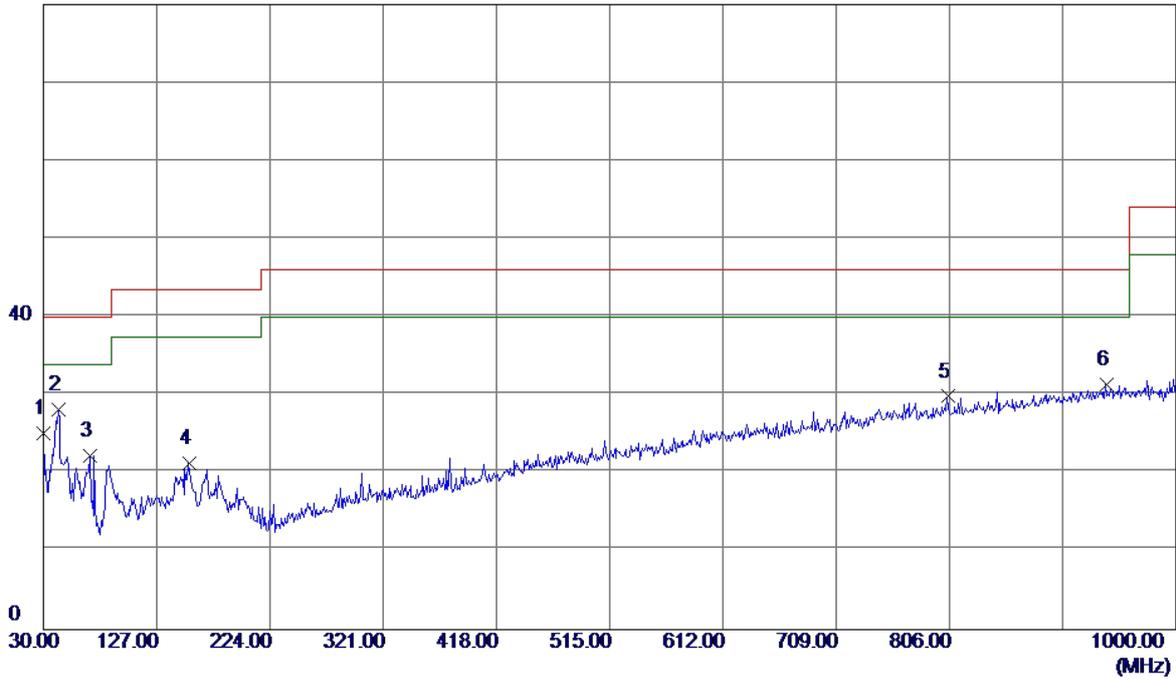

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	39.73	-14.66	25.07	40.00	-14.93	QP
2 *	43.0950	41.41	-13.30	28.11	40.00	-11.89	QP
3	70.2550	38.46	-16.20	22.26	40.00	-17.74	QP
4	154.6450	34.43	-13.11	21.32	43.50	-22.18	QP
5	804.5450	32.13	-2.29	29.84	46.00	-16.16	QP
6	940.3450	30.73	0.61	31.34	46.00	-14.66	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(GY)		
Test Engineer	Treey Chen		


80 dBuV/m

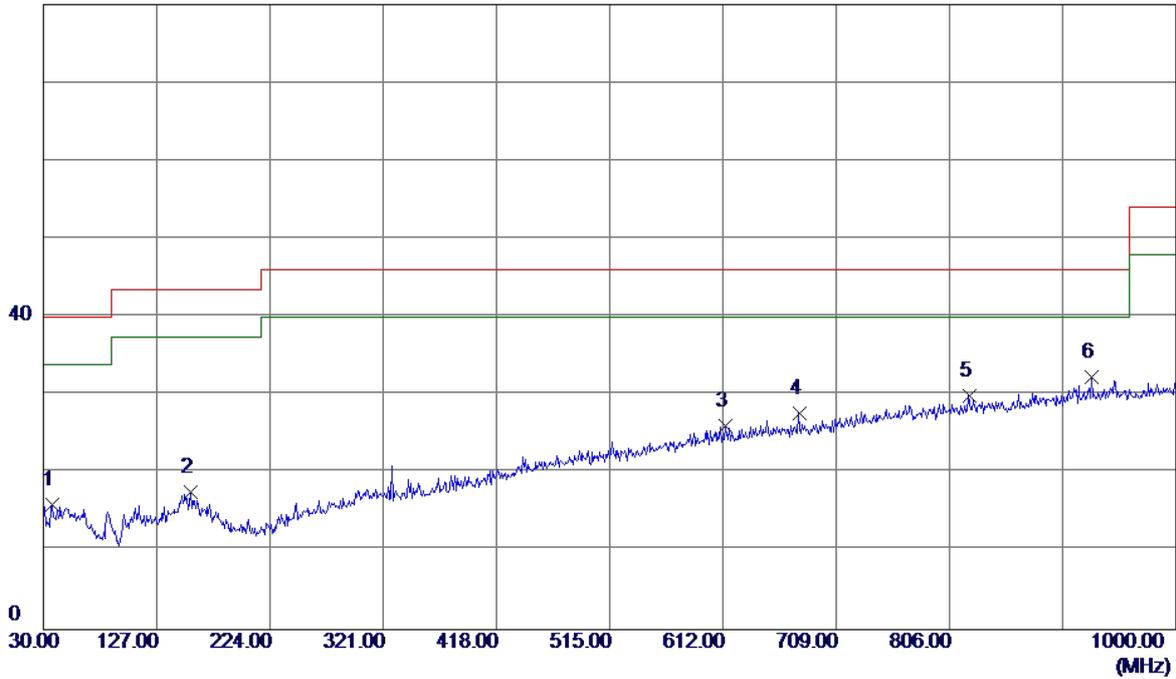

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	37.7599	29.93	-13.88	16.05	40.00	-23.95	QP
2	156.1000	30.84	-13.21	17.63	43.50	-25.87	QP
3	614.4250	31.96	-5.94	26.02	46.00	-19.98	QP
4	677.4750	32.29	-4.68	27.61	46.00	-18.39	QP
5	822.9750	31.96	-2.09	29.87	46.00	-16.13	QP
6 *	928.2200	31.89	0.38	32.27	46.00	-13.73	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)		
Test Engineer	Trey Chen		


80 dBuV/m

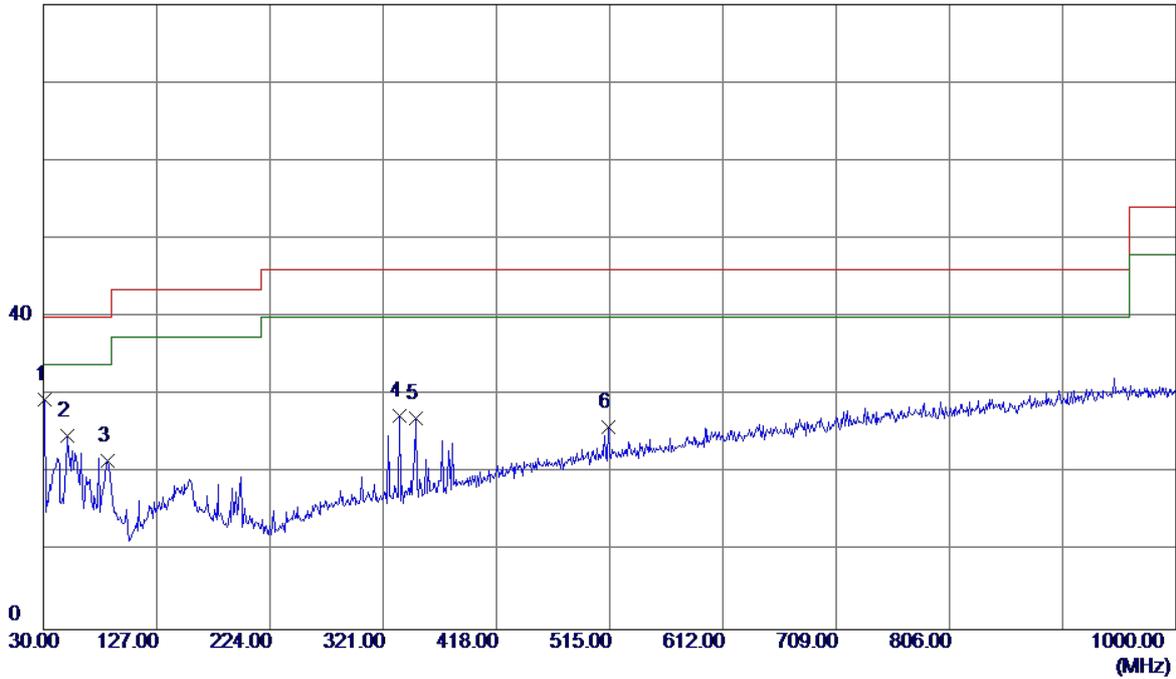

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.9700	44.03	-14.53	29.50	40.00	-10.50	QP
2	50.8550	38.54	-13.77	24.77	40.00	-15.23	QP
3	85.2900	39.85	-18.26	21.59	40.00	-18.41	QP
4	335.0650	38.50	-11.20	27.30	46.00	-18.70	QP
5	349.1300	37.99	-10.93	27.06	46.00	-18.94	QP
6	514.0300	33.86	-7.97	25.89	46.00	-20.11	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)		
Test Engineer	Treey Chen		


80 dBuV/m

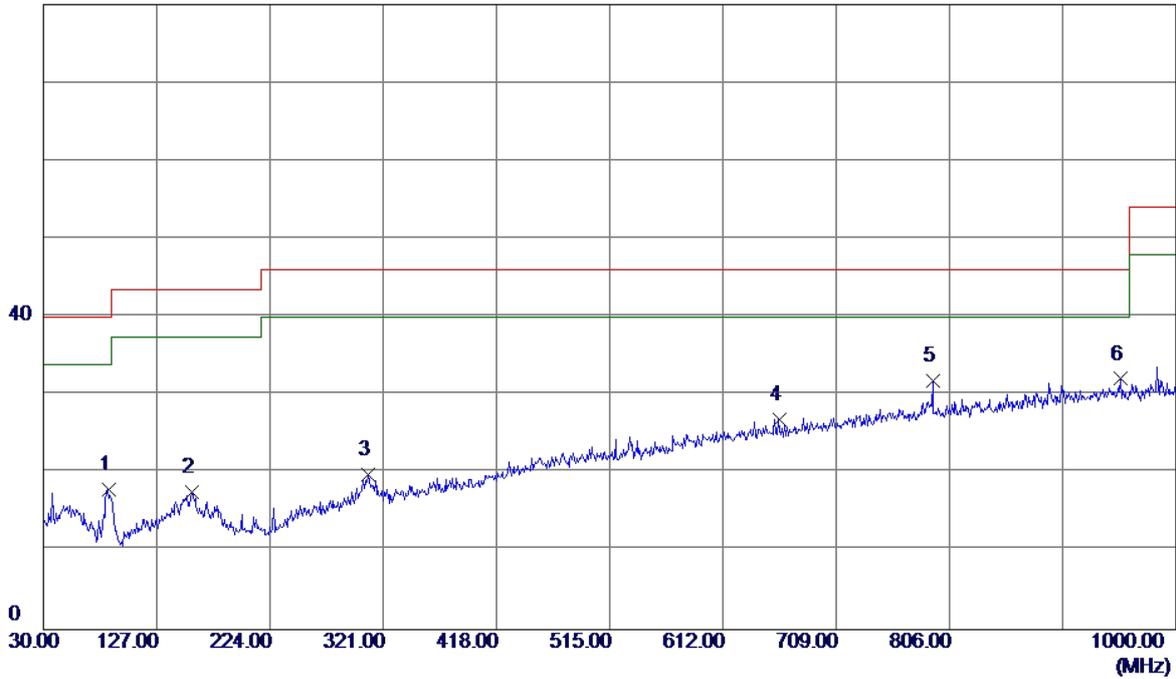

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	85.7750	36.19	-18.29	17.90	40.00	-22.10	QP
2	157.5549	30.91	-13.32	17.59	43.50	-25.91	QP
3	308.3900	31.48	-11.70	19.78	46.00	-26.22	QP
4	660.0150	31.85	-4.97	26.88	46.00	-19.12	QP
5	791.9350	34.32	-2.47	31.85	46.00	-14.15	QP
6 *	952.9550	31.27	0.81	32.08	46.00	-13.92	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN Battery:DESAY		
Test Engineer	Treyy Chen		


80 dBuV/m

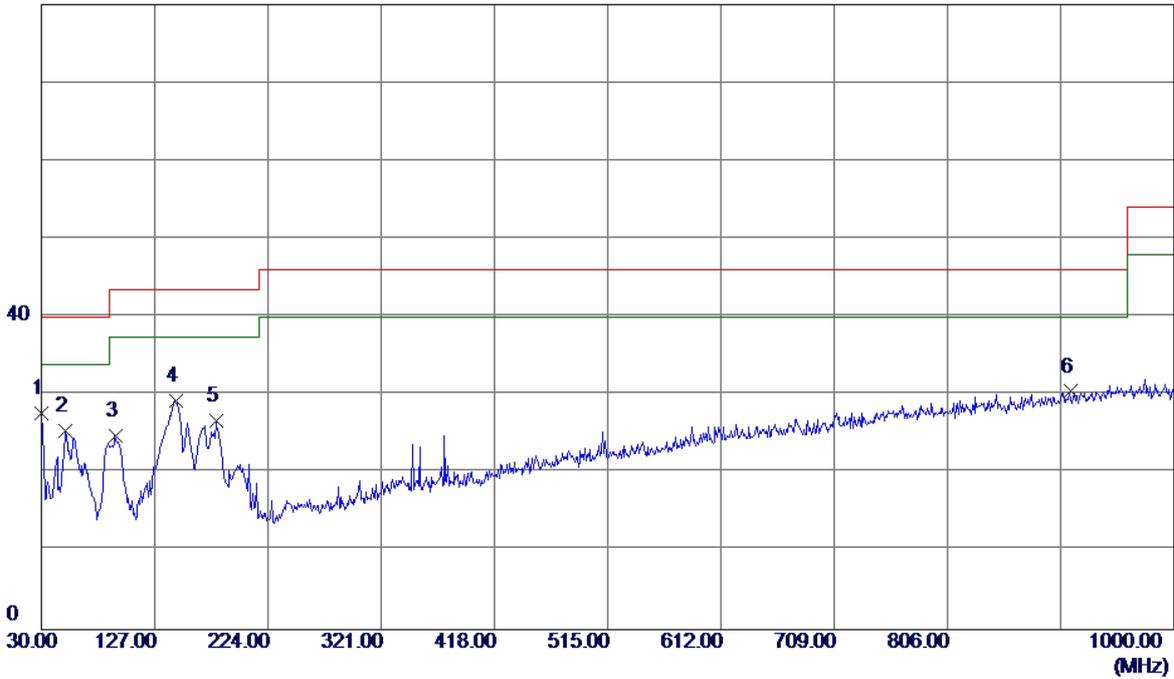

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	42.38	-14.66	27.72	40.00	-12.28	QP
2	50.8550	39.24	-13.77	25.47	40.00	-14.53	QP
3	93.5350	42.95	-18.16	24.79	43.50	-18.71	QP
4	144.9450	42.28	-12.98	29.30	43.50	-14.20	QP
5	179.8650	41.32	-14.60	26.72	43.50	-16.78	QP
6	911.2450	30.42	0.06	30.48	46.00	-15.52	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN Battery:DESAY		
Test Engineer	Treyy Chen		


80 dBuV/m

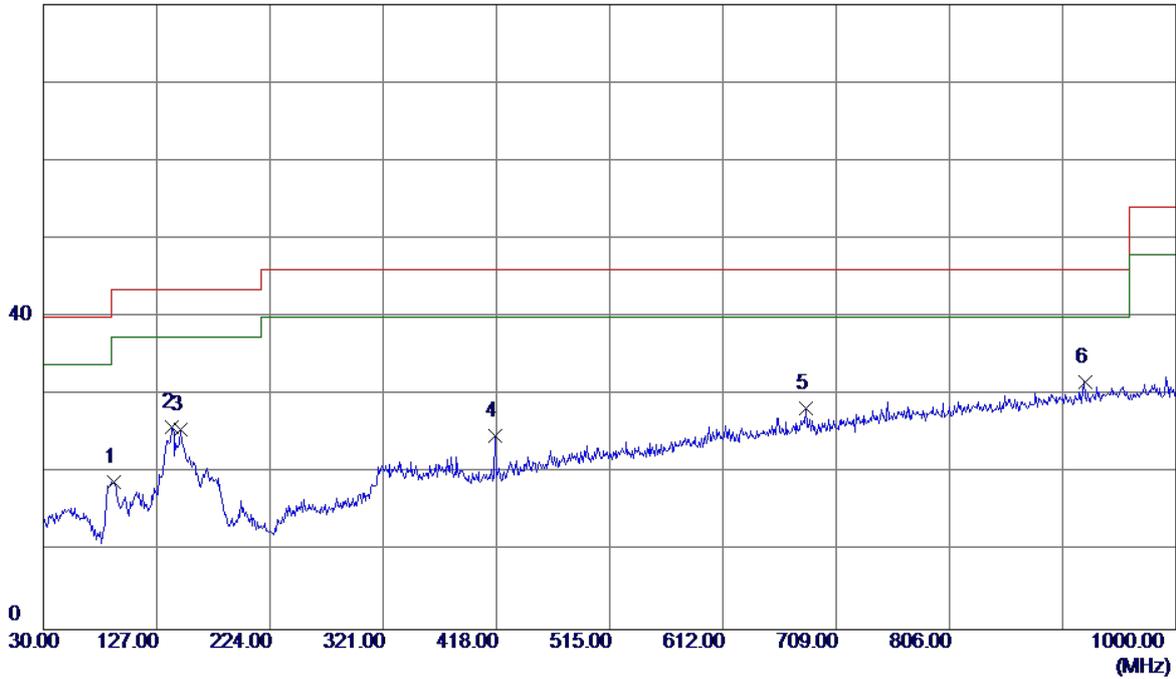

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	90.6250	37.39	-18.45	18.94	43.50	-24.56	QP
2	140.0950	39.02	-13.17	25.85	43.50	-17.65	QP
3	147.8550	38.42	-12.86	25.56	43.50	-17.94	QP
4	417.0300	34.14	-9.37	24.77	46.00	-21.23	QP
5	683.2950	32.97	-4.59	28.38	46.00	-17.62	QP
6 *	921.9150	31.38	0.26	31.64	46.00	-14.36	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)		
Test Engineer	Treyy Chen		


80 dBuV/m

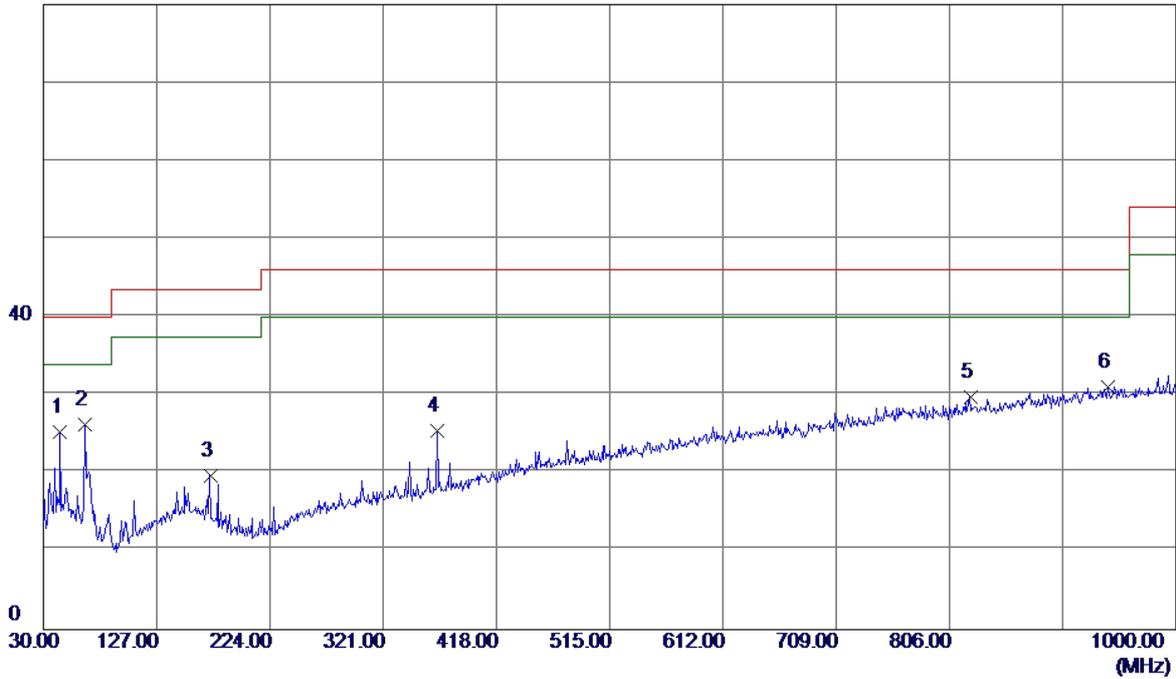

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	44.5500	38.37	-13.08	25.29	40.00	-14.71	QP
2 *	65.8900	41.92	-15.63	26.29	40.00	-13.71	QP
3	173.0750	33.58	-13.85	19.73	43.50	-23.77	QP
4	367.5600	35.84	-10.44	25.40	46.00	-20.60	QP
5	823.9450	31.84	-2.08	29.76	46.00	-16.24	QP
6	941.8000	30.35	0.64	30.99	46.00	-15.01	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)		
Test Engineer	Treyy Chen		


80 dBuV/m

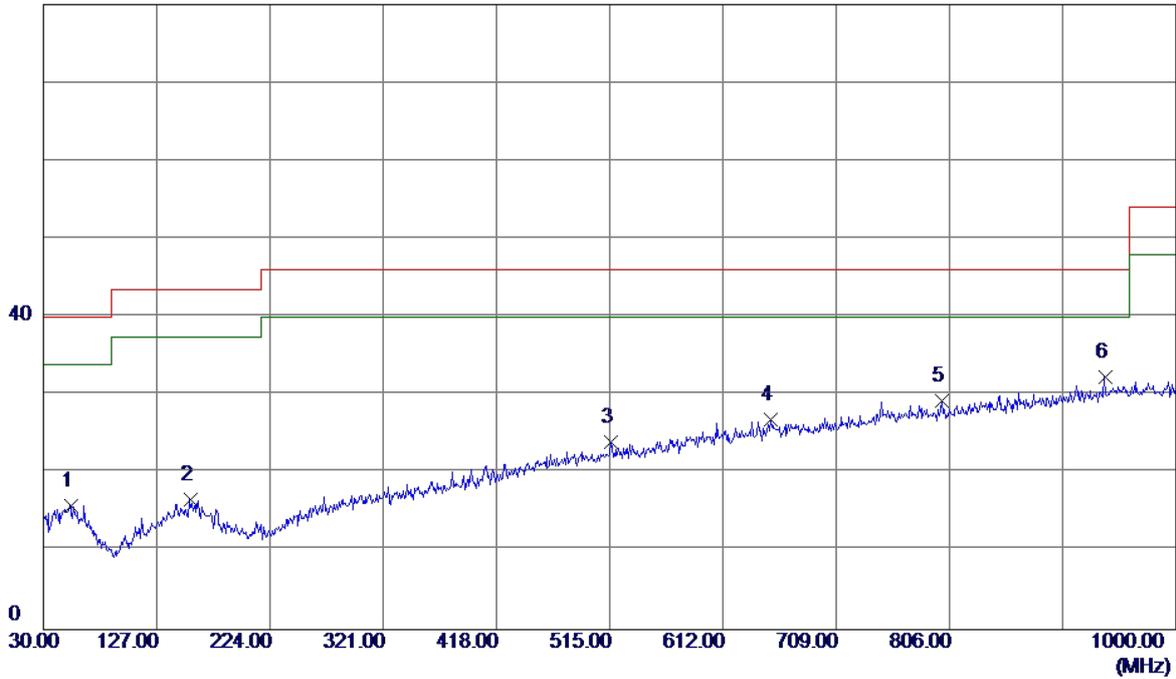

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	53.2800	29.94	-14.06	15.88	40.00	-24.12	QP
2	155.6150	29.75	-13.18	16.57	43.50	-26.93	QP
3	516.4550	31.87	-7.92	23.95	46.00	-22.05	QP
4	652.7400	32.00	-5.09	26.91	46.00	-19.09	QP
5	799.2100	31.66	-2.35	29.31	46.00	-16.69	QP
6 *	939.3750	31.70	0.59	32.29	46.00	-13.71	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)+Earphone:Quancheng		
Test Engineer	Trey Chen		


80 dBuV/m

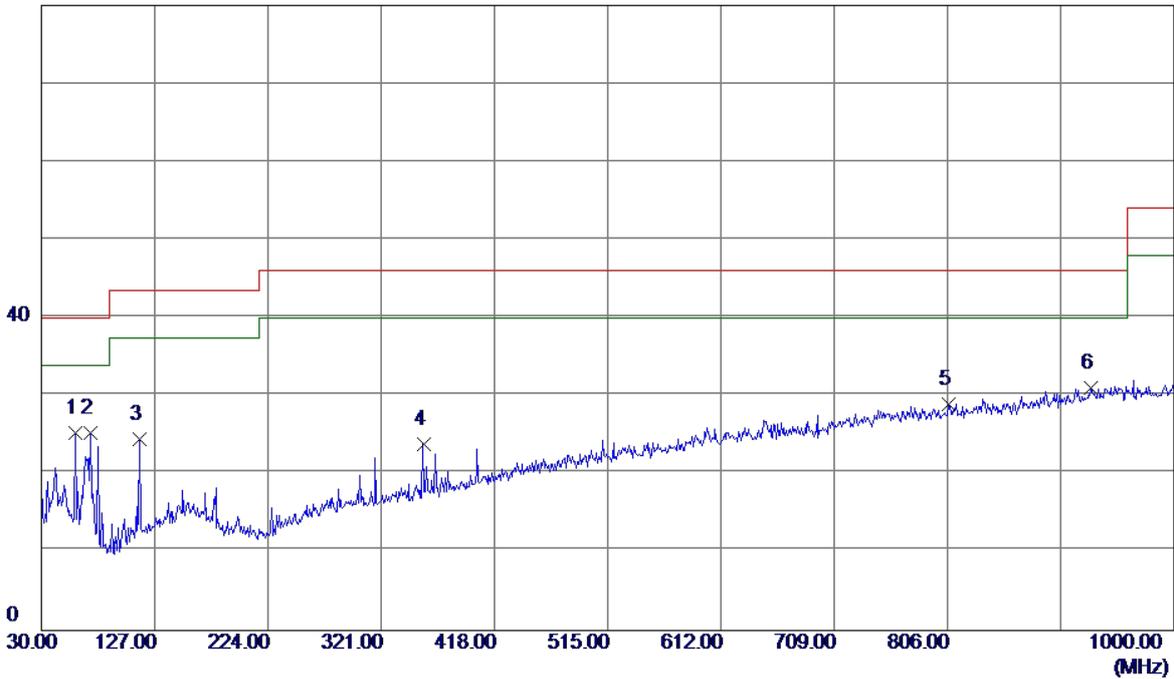

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	59.1000	40.06	-14.76	25.30	40.00	-14.70	QP
2 *	72.1950	41.89	-16.56	25.33	40.00	-14.67	QP
3	114.3900	40.50	-16.09	24.41	43.50	-19.09	QP
4	357.3750	34.49	-10.72	23.77	46.00	-22.23	QP
5	806.9699	31.17	-2.26	28.91	46.00	-17.09	QP
6	929.1900	30.63	0.40	31.03	46.00	-14.97	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)+Earphone:Quancheng		
Test Engineer	Trey Chen		


80 dBuV/m

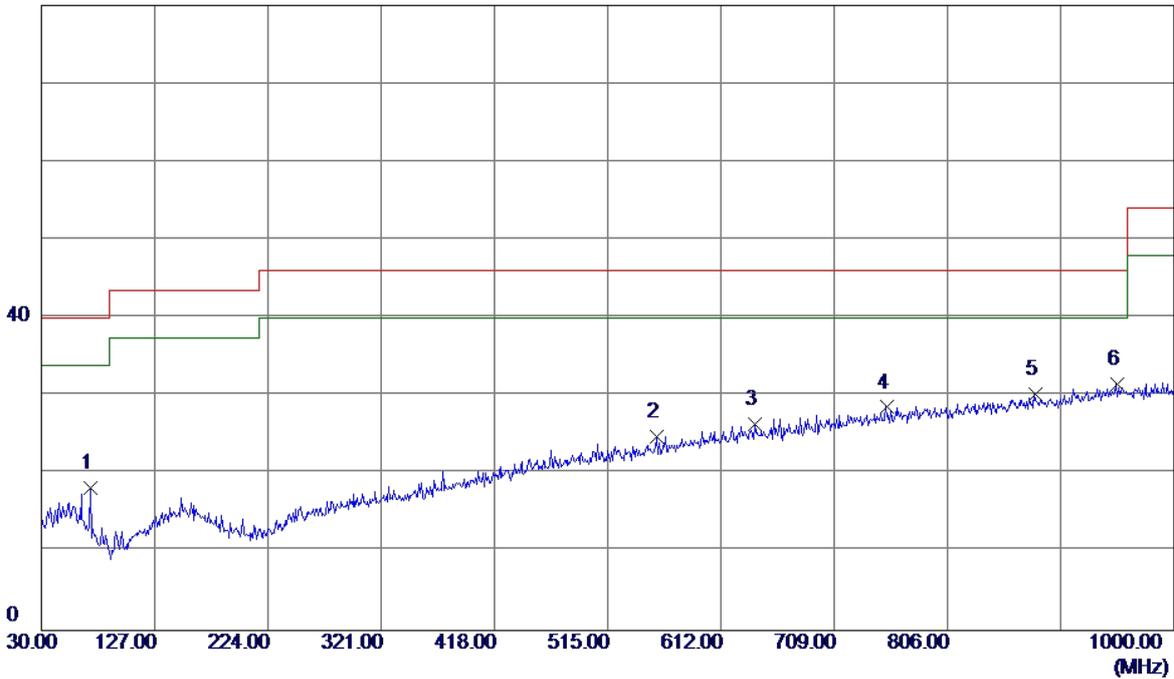

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	72.1950	34.83	-16.56	18.27	40.00	-21.73	QP
2	557.1950	31.82	-7.04	24.78	46.00	-21.22	QP
3	641.5850	31.72	-5.33	26.39	46.00	-19.61	QP
4	754.1050	31.62	-3.06	28.56	46.00	-17.44	QP
5	881.1750	31.04	-0.77	30.27	46.00	-15.73	QP
6 *	951.0150	30.73	0.80	31.53	46.00	-14.47	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)+Earphone:Merry		
Test Engineer	Trey Chen		


80 dBuV/m

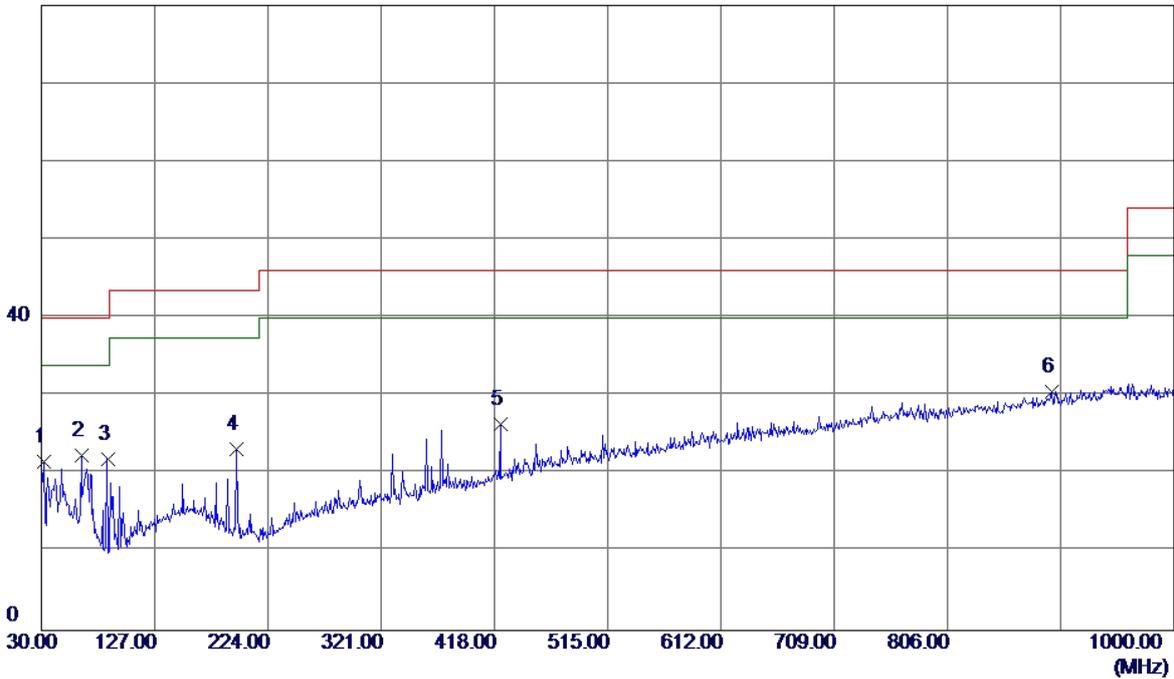

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	31.9400	36.05	-14.41	21.64	40.00	-18.36	QP
2	64.4350	37.79	-15.44	22.35	40.00	-17.65	QP
3	86.7450	40.20	-18.34	21.86	40.00	-18.14	QP
4	196.8400	38.38	-15.16	23.22	43.50	-20.28	QP
5	422.8500	35.69	-9.30	26.39	46.00	-19.61	QP
6 *	895.2400	30.94	-0.31	30.63	46.00	-15.37	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)+Earphone:Merry		
Test Engineer	Trey Chen		


80 dBuV/m

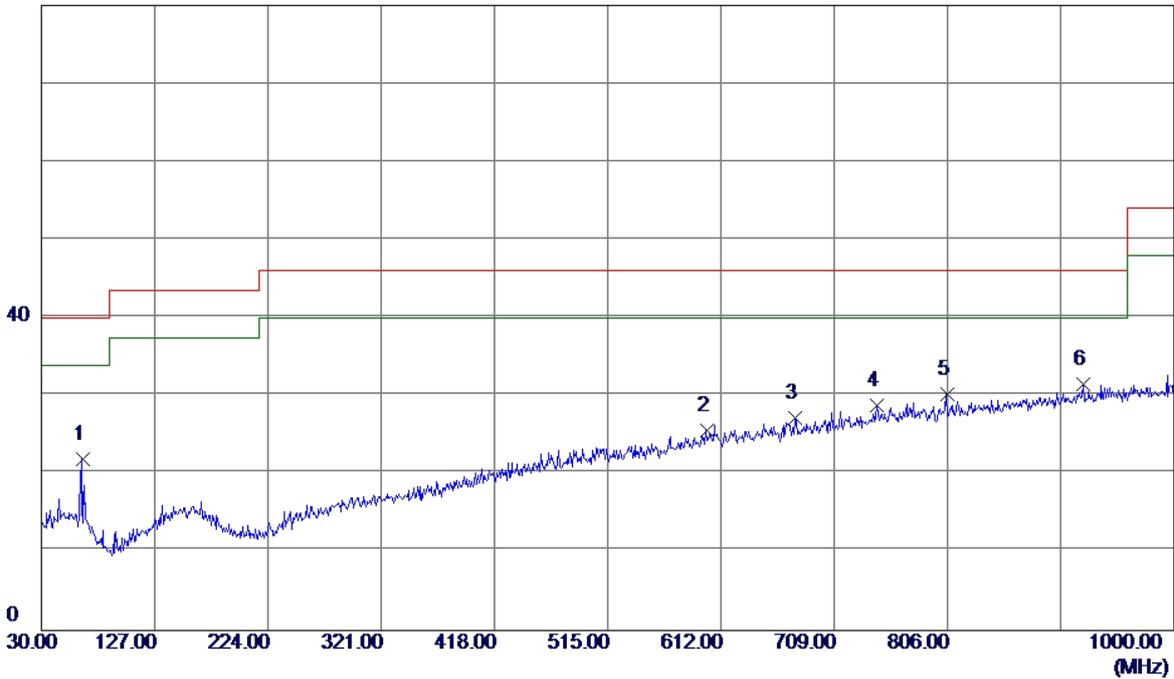

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	65.4050	37.55	-15.56	21.99	40.00	-18.01	QP
2	599.8750	31.87	-6.27	25.60	46.00	-20.40	QP
3	676.0200	31.84	-4.71	27.13	46.00	-18.87	QP
4	745.8600	31.96	-3.22	28.74	46.00	-17.26	QP
5	805.5150	32.53	-2.28	30.25	46.00	-15.75	QP
6 *	922.8850	31.31	0.28	31.59	46.00	-14.41	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)+Earphone:Lianchuang		
Test Engineer	Trey Chen		


80 dBuV/m

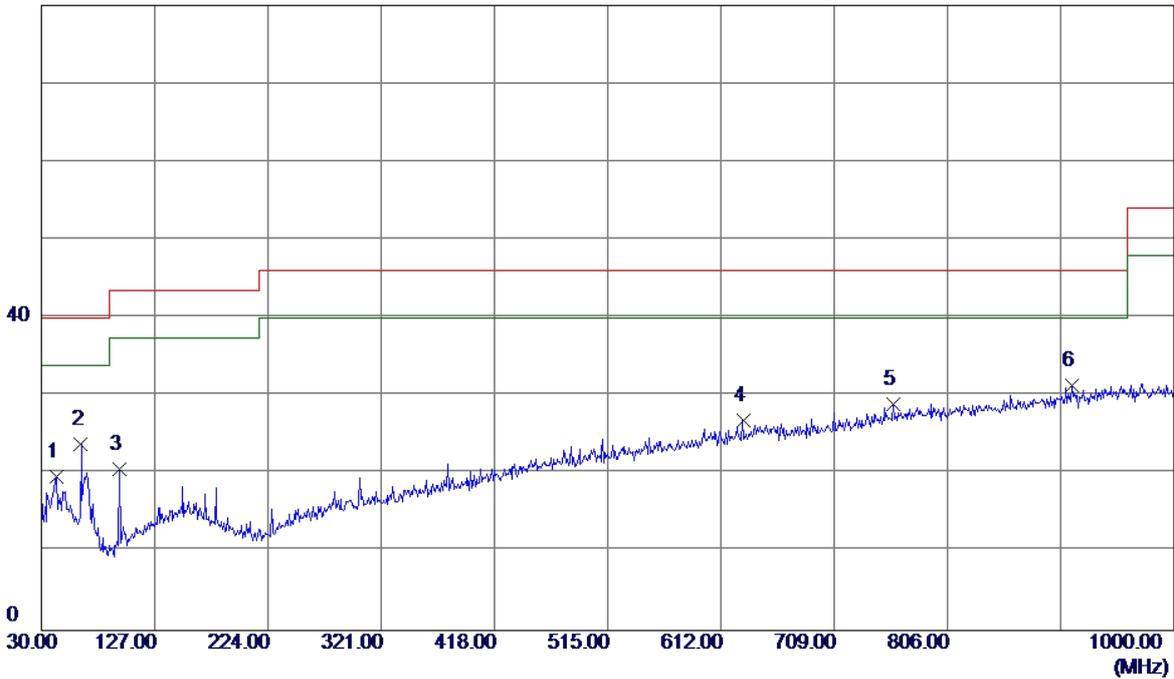

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	42.6100	33.04	-13.37	19.67	40.00	-20.33	QP
2	63.9500	39.18	-15.38	23.80	40.00	-16.20	QP
3	96.9300	38.44	-17.83	20.61	43.50	-22.89	QP
4	630.9150	32.47	-5.57	26.90	46.00	-19.10	QP
5	759.4400	31.98	-2.98	29.00	46.00	-17.00	QP
6 *	913.1850	31.31	0.10	31.41	46.00	-14.59	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)+Earphone:Lianchuang		
Test Engineer	Trey Chen		


80 dBuV/m

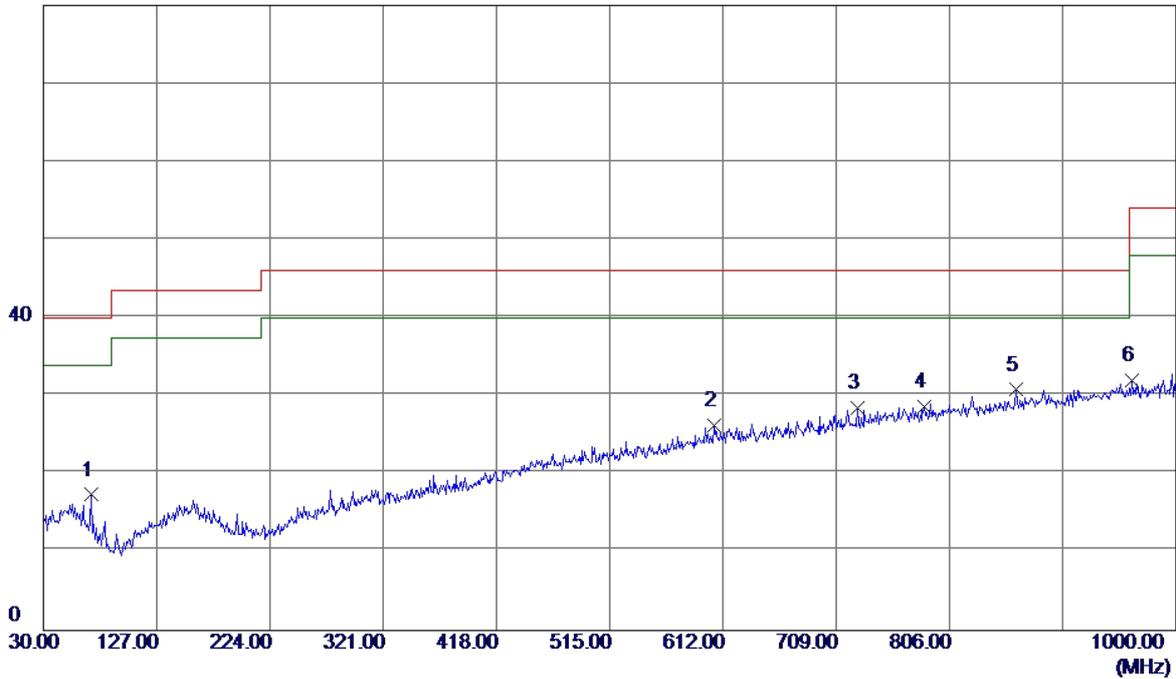

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	71.2250	33.74	-16.38	17.36	40.00	-22.64	QP
2	604.2400	32.39	-6.17	26.22	46.00	-19.78	QP
3	727.4300	32.17	-3.66	28.51	46.00	-17.49	QP
4	784.6599	31.21	-2.58	28.63	46.00	-17.37	QP
5 *	863.2300	32.16	-1.36	30.80	46.00	-15.20	QP
6	962.6550	31.06	0.88	31.94	54.00	-22.06	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (GSM)		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)		
Test Engineer	Treyy Chen		


80 dBuV/m

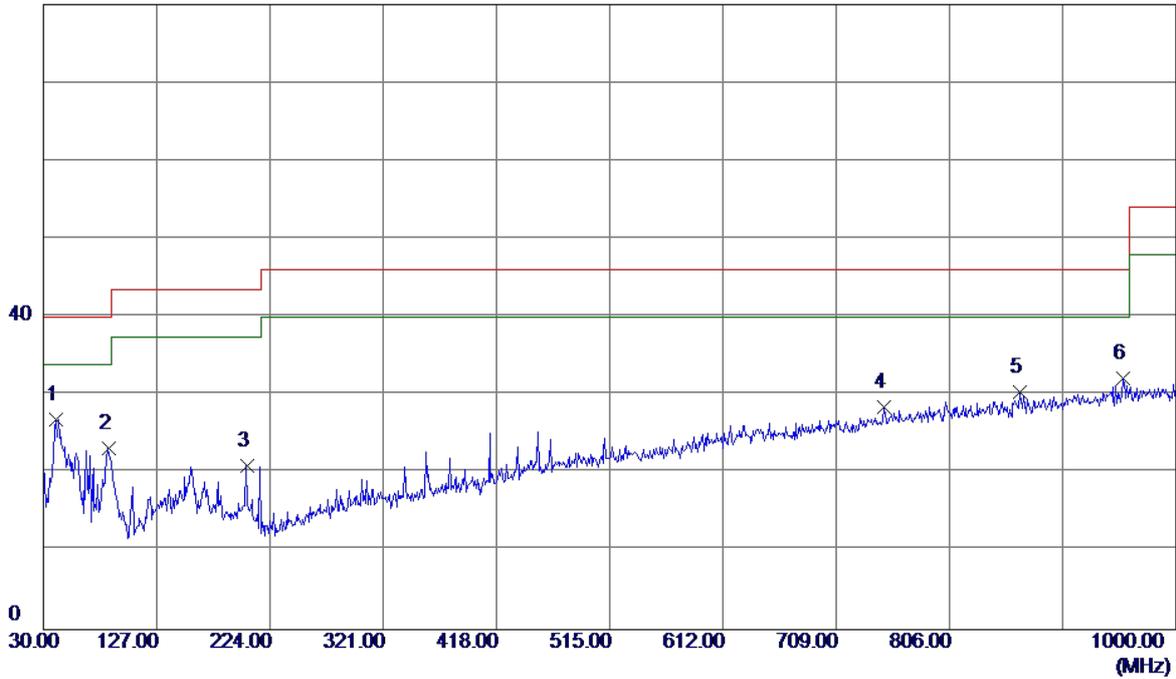

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	41.1550	40.52	-13.59	26.93	40.00	-13.07	QP
2	85.7750	41.54	-18.29	23.25	40.00	-16.75	QP
3	204.1150	35.87	-14.94	20.93	43.50	-22.57	QP
4	750.2250	31.53	-3.12	28.41	46.00	-17.59	QP
5	866.1400	31.70	-1.26	30.44	46.00	-15.56	QP
6	954.4100	31.28	0.82	32.10	46.00	-13.90	QP


EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (GSM)		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)		
Test Engineer	Treyy Chen		

80 dBuV/m

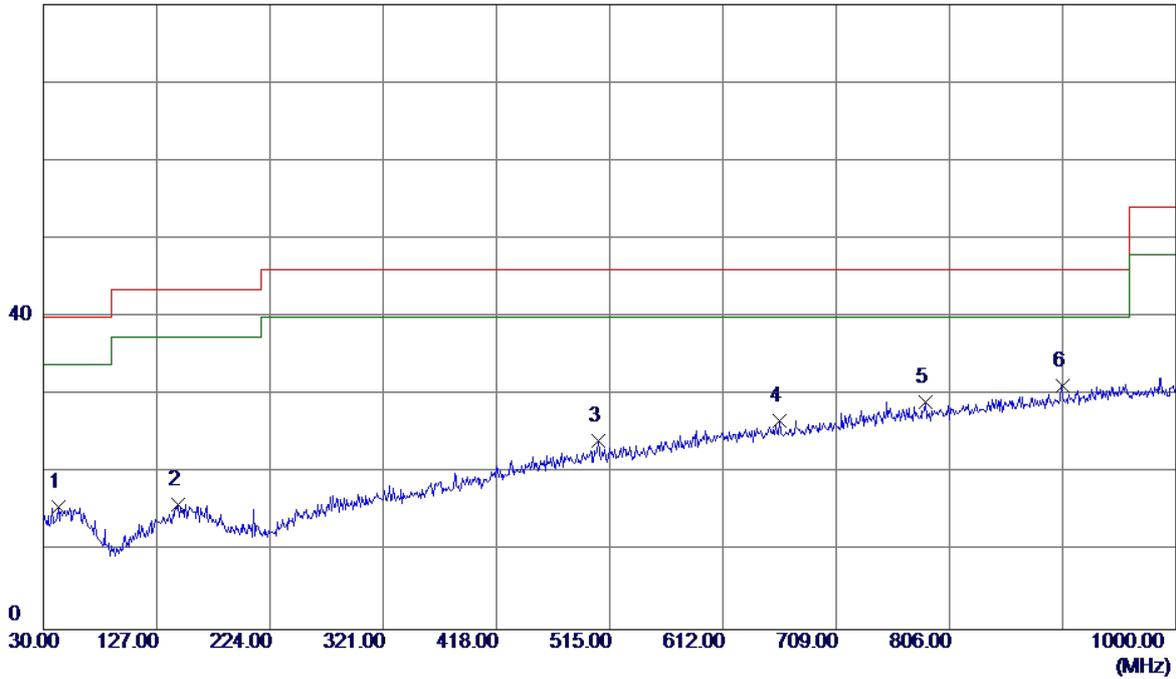

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	42.6100	28.98	-13.37	15.61	40.00	-24.39	QP
2	145.4299	29.03	-12.96	16.07	43.50	-27.43	QP
3	505.3000	32.33	-8.16	24.17	46.00	-21.83	QP
4	660.5000	31.71	-4.97	26.74	46.00	-19.26	QP
5	785.6300	31.75	-2.57	29.18	46.00	-16.82	QP
6 *	902.5150	31.26	-0.10	31.16	46.00	-14.84	QP


EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)		
Test Engineer	Treey Chen		

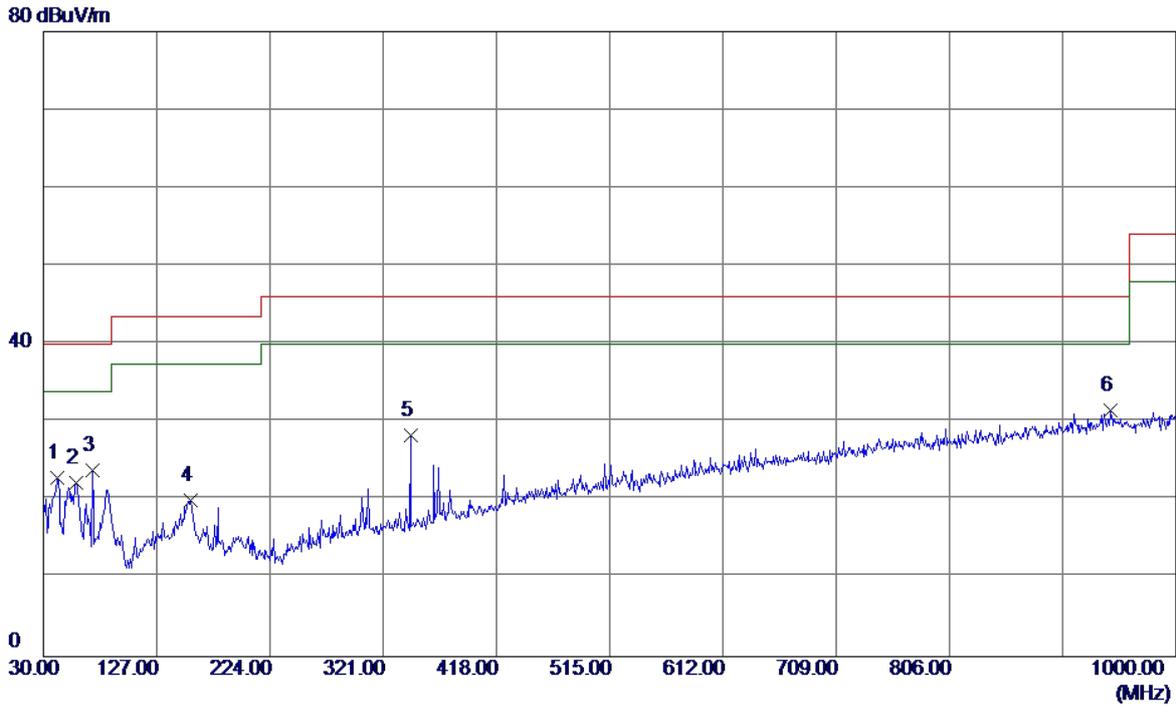

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	42.1250	36.28	-13.45	22.83	40.00	-17.17	QP
2	58.1300	36.88	-14.64	22.24	40.00	-17.76	QP
3	72.1950	40.42	-16.56	23.86	40.00	-16.14	QP
4	156.1000	33.16	-13.21	19.95	43.50	-23.55	QP
5	344.2800	39.28	-11.02	28.26	46.00	-17.74	QP
6 *	944.2250	30.91	0.68	31.59	46.00	-14.41	QP


EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)		
Test Engineer	Treey Chen		

80 dBuV/m

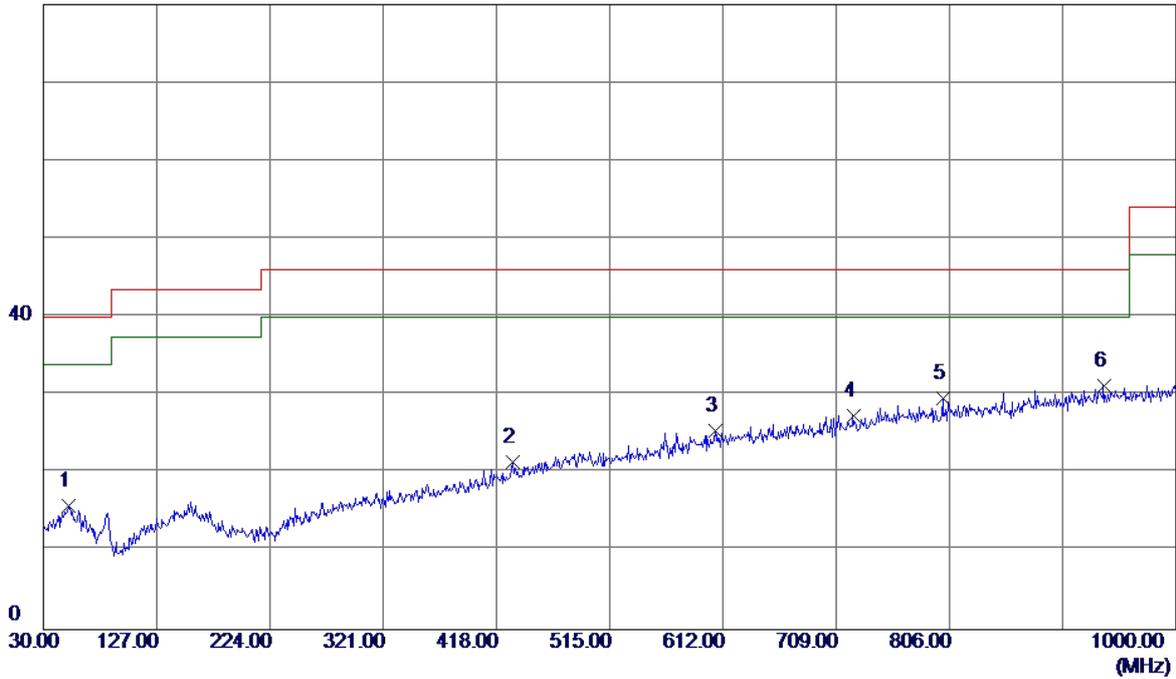

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	51.3400	29.61	-13.83	15.78	40.00	-24.22	QP
2	431.5800	30.67	-9.19	21.48	46.00	-24.52	QP
3	605.6950	31.58	-6.14	25.44	46.00	-20.56	QP
4	724.0349	31.03	-3.74	27.29	46.00	-18.71	QP
5	800.1800	31.88	-2.34	29.54	46.00	-16.46	QP
6 *	938.4050	30.66	0.57	31.23	46.00	-14.77	QP


EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)		
Test Engineer	Treyy Chen		

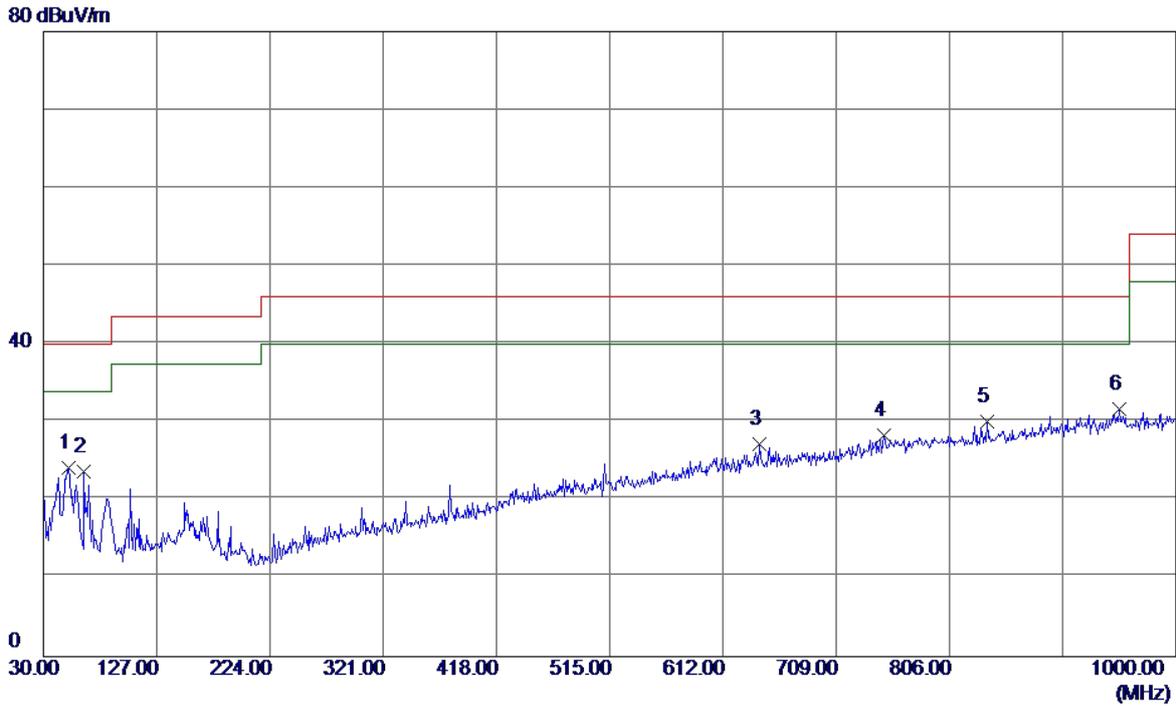

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	51.3400	38.06	-13.83	24.23	40.00	-15.77	QP
2	64.9200	39.13	-15.50	23.63	40.00	-16.37	QP
3	643.0400	32.56	-5.30	27.26	46.00	-18.74	QP
4	749.7400	31.40	-3.13	28.27	46.00	-17.73	QP
5	838.0100	31.99	-1.93	30.06	46.00	-15.94	QP
6 *	951.9850	30.90	0.80	31.70	46.00	-14.30	QP

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Hunekey+USB Cable:FOXCONN Battery:SCUD(LG)		
Test Engineer	Treey Chen		

80 dBuV/m

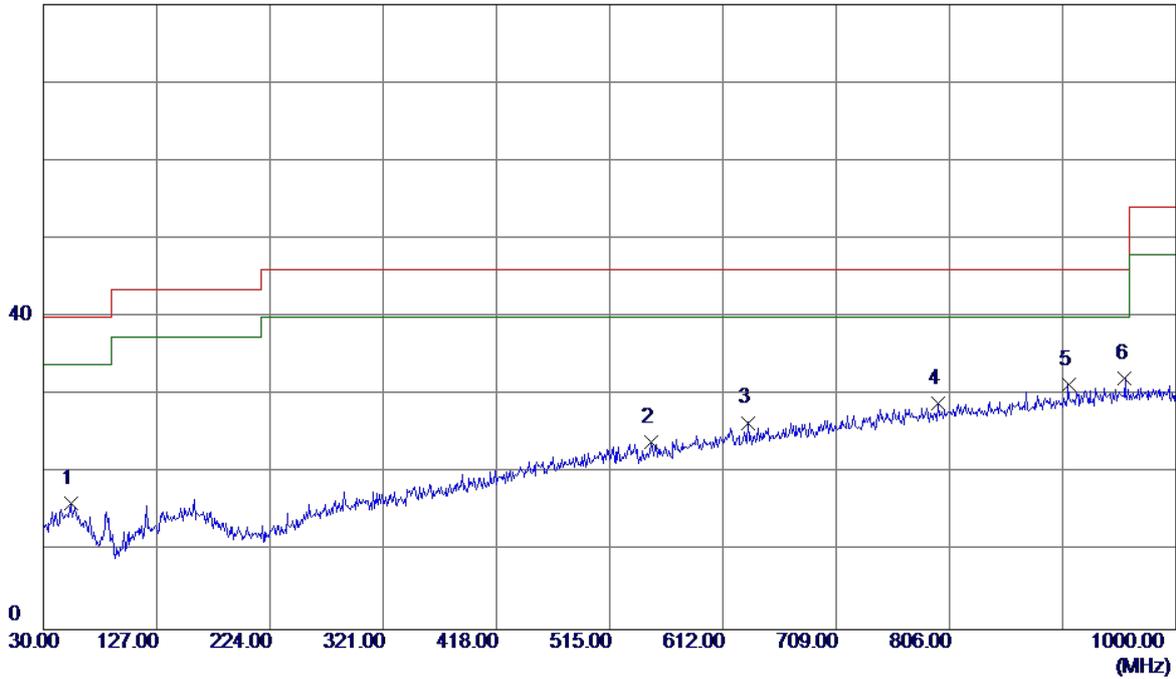


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	53.7650	30.25	-14.12	16.13	40.00	-23.87	QP
2	550.8900	31.10	-7.16	23.94	46.00	-22.06	QP
3	633.3400	32.00	-5.52	26.48	46.00	-19.52	QP
4	796.7849	31.29	-2.39	28.90	46.00	-17.10	QP
5	908.3350	31.37	0.01	31.38	46.00	-14.62	QP
6 *	956.3500	31.40	0.83	32.23	46.00	-13.77	QP

4.2.8 TEST RESULTS-ABOVE 1GHZ

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Trey Chen		

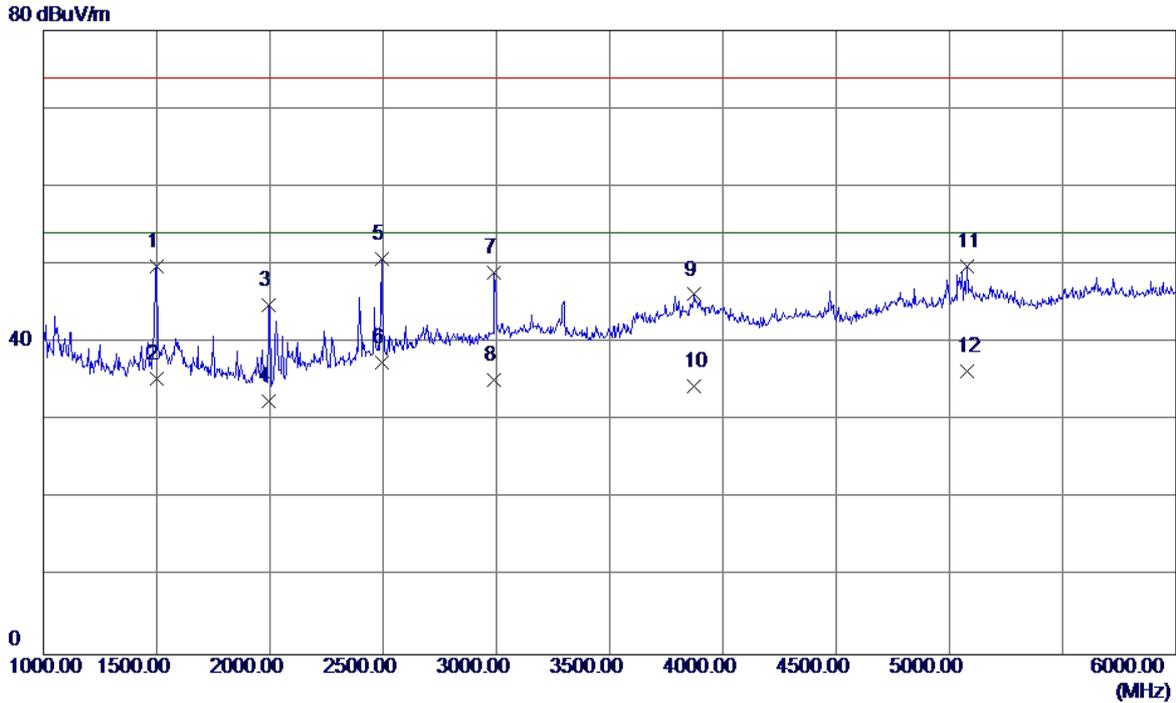


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	52.51	-2.76	49.75	74.00	-24.25	Peak
2	1500.0000	38.15	-2.76	35.39	54.00	-18.61	AVG
3	1995.0000	48.78	-4.05	44.73	74.00	-29.27	Peak
4	1995.0000	36.57	-4.05	32.52	54.00	-21.48	AVG
5	2492.5000	51.31	-0.59	50.72	74.00	-23.28	Peak
6 *	2492.5000	38.05	-0.59	37.46	54.00	-16.54	AVG
7	2990.0000	46.97	1.92	48.89	74.00	-25.11	Peak
8	2990.0000	33.25	1.92	35.17	54.00	-18.83	AVG
9	3870.0000	42.48	3.68	46.16	74.00	-27.84	Peak
10	3870.0000	30.66	3.68	34.34	54.00	-19.66	AVG
11	5077.5000	43.10	6.65	49.75	74.00	-24.25	Peak
12	5077.5000	29.62	6.65	36.27	54.00	-17.73	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Trey Chen		

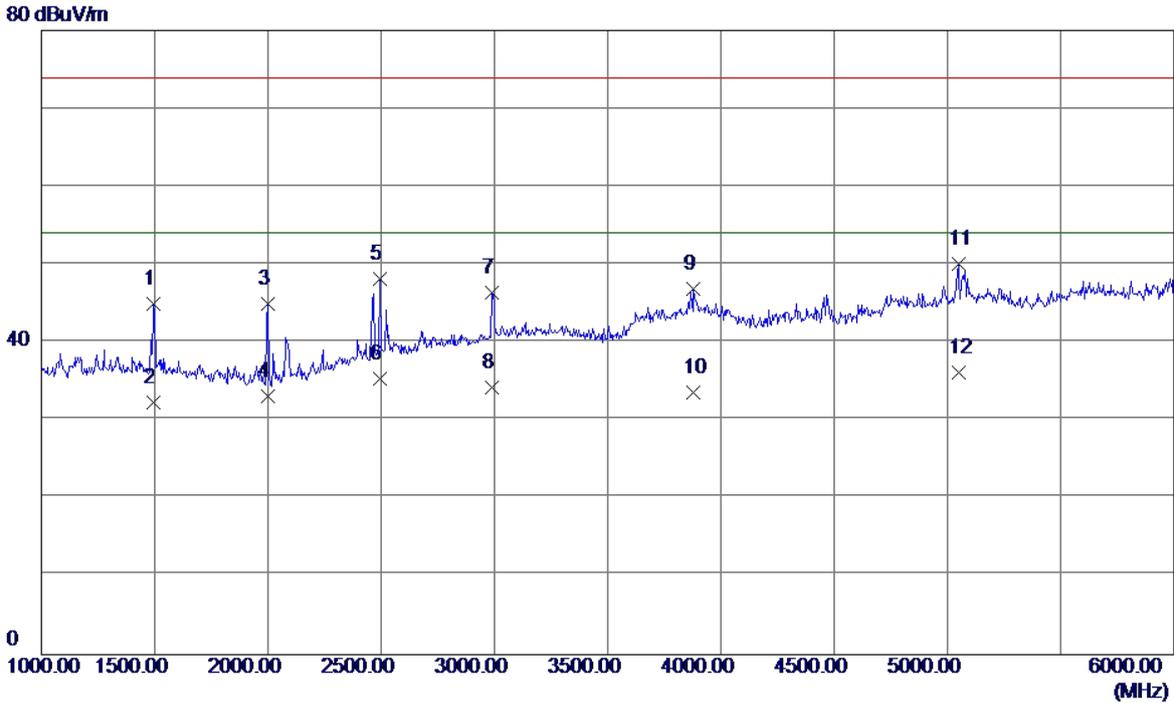


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	47.70	-2.76	44.94	74.00	-29.06	Peak
2	1495.0000	35.12	-2.76	32.36	54.00	-21.64	AVG
3	2000.0000	49.09	-4.06	45.03	74.00	-28.97	Peak
4	2000.0000	37.18	-4.06	33.12	54.00	-20.88	AVG
5	2492.5000	48.69	-0.59	48.10	74.00	-25.90	Peak
6	2492.5000	35.93	-0.59	35.34	54.00	-18.66	AVG
7	2987.5000	44.56	1.91	46.47	74.00	-27.53	Peak
8	2987.5000	32.37	1.91	34.28	54.00	-19.72	AVG
9	3880.0000	43.11	3.72	46.83	74.00	-27.17	Peak
10	3880.0000	29.89	3.72	33.61	54.00	-20.39	AVG
11	5047.5000	43.51	6.55	50.06	74.00	-23.94	Peak
12 *	5047.5000	29.66	6.55	36.21	54.00	-17.79	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB Cable:HONGLIN		
Test Engineer	Trey Chen		

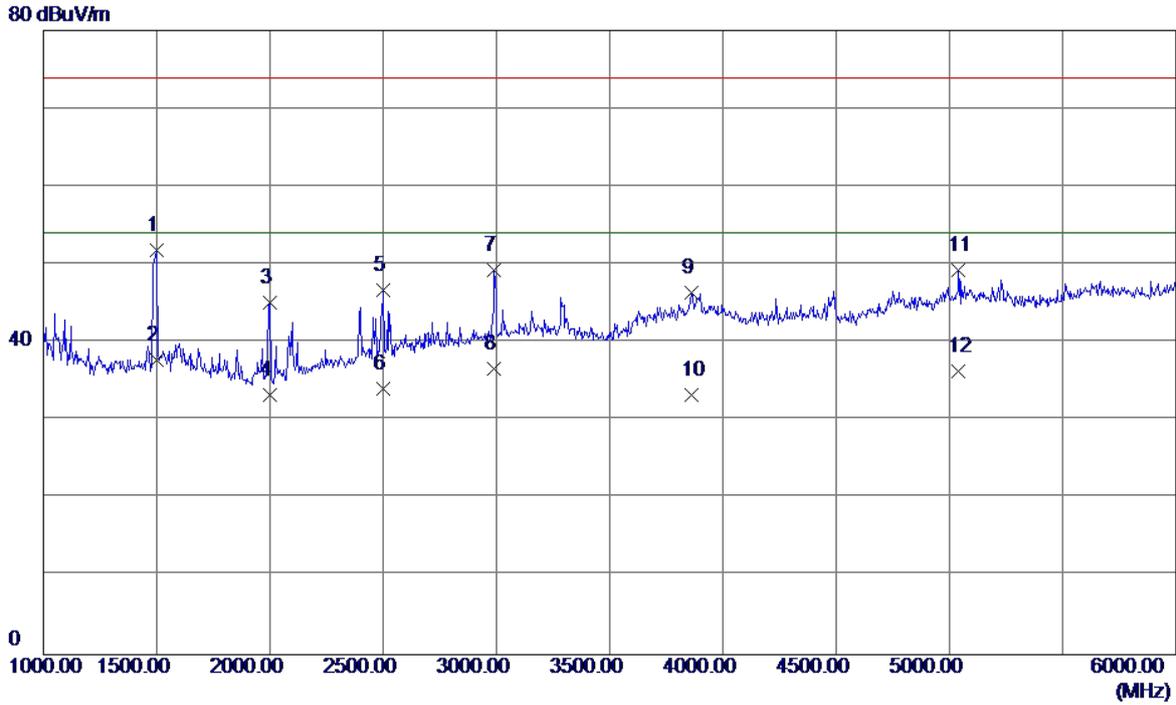


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1497.5000	54.67	-2.76	51.91	74.00	-22.09	Peak
2 *	1497.5000	40.45	-2.76	37.69	54.00	-16.31	AVG
3	2000.0000	49.20	-4.06	45.14	74.00	-28.86	Peak
4	2000.0000	37.28	-4.06	33.22	54.00	-20.78	AVG
5	2500.0000	47.31	-0.53	46.78	74.00	-27.22	Peak
6	2500.0000	34.57	-0.53	34.04	54.00	-19.96	AVG
7	2990.0000	47.34	1.92	49.26	74.00	-24.74	Peak
8	2990.0000	34.76	1.92	36.68	54.00	-17.32	AVG
9	3860.0000	42.77	3.65	46.42	74.00	-27.58	Peak
10	3860.0000	29.56	3.65	33.21	54.00	-20.79	AVG
11	5040.0000	42.72	6.53	49.25	74.00	-24.75	Peak
12	5040.0000	29.78	6.53	36.31	54.00	-17.69	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB Cable:HONGLIN		
Test Engineer	Trey Chen		

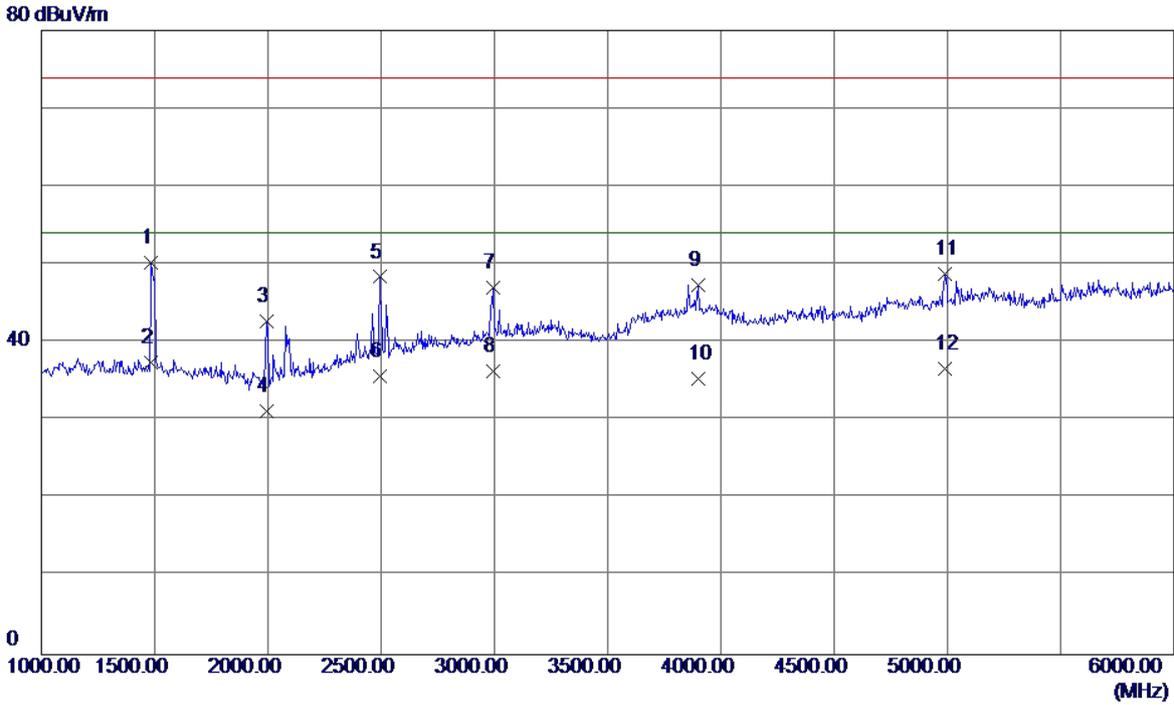


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1485.0000	53.04	-2.77	50.27	74.00	-23.73	Peak
2 *	1485.0000	40.19	-2.77	37.42	54.00	-16.58	AVG
3	1992.5000	46.73	-4.04	42.69	74.00	-31.31	Peak
4	1992.5000	35.28	-4.04	31.24	54.00	-22.76	AVG
5	2492.5000	48.99	-0.59	48.40	74.00	-25.60	Peak
6	2492.5000	36.26	-0.59	35.67	54.00	-18.33	AVG
7	2995.0000	45.16	1.94	47.10	74.00	-26.90	Peak
8	2995.0000	34.32	1.94	36.26	54.00	-17.74	AVG
9	3900.0000	43.59	3.78	47.37	74.00	-26.63	Peak
10	3900.0000	31.64	3.78	35.42	54.00	-18.58	AVG
11	4990.0000	42.45	6.35	48.80	74.00	-25.20	Peak
12	4990.0000	30.27	6.35	36.62	54.00	-17.38	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Trey Chen		

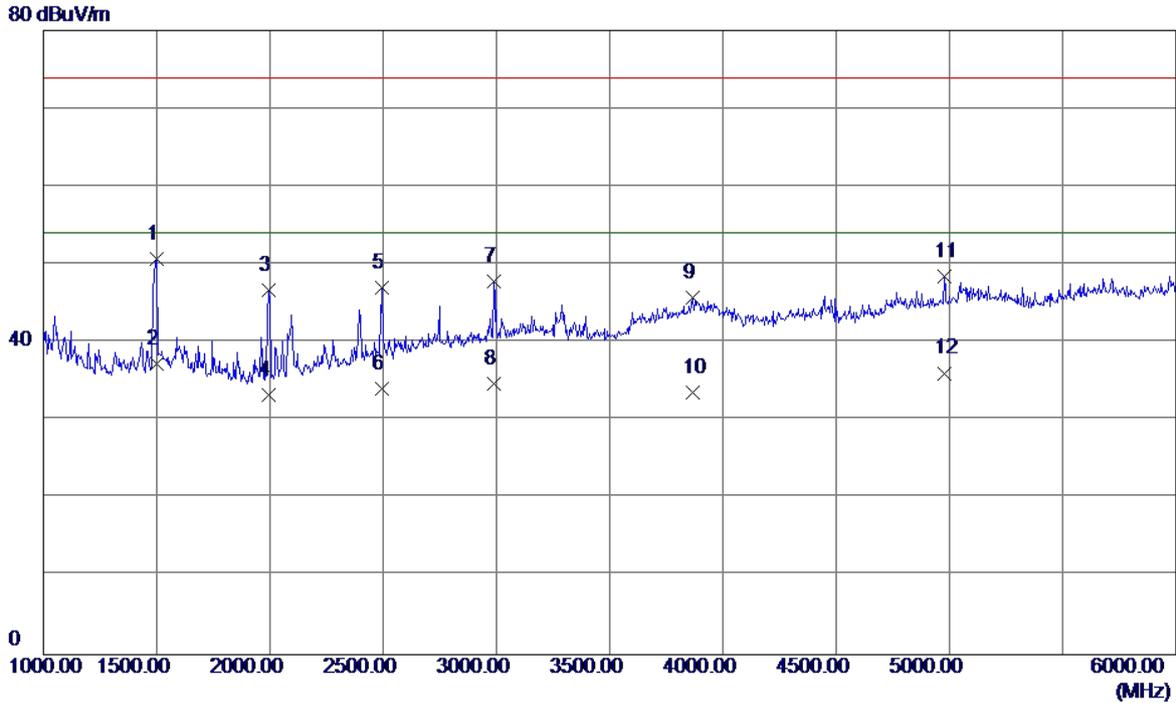


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	53.42	-2.76	50.66	74.00	-23.34	Peak
2 *	1500.0000	40.03	-2.76	37.27	54.00	-16.73	AVG
3	1995.0000	50.83	-4.05	46.78	74.00	-27.22	Peak
4	1995.0000	37.31	-4.05	33.26	54.00	-20.74	AVG
5	2495.0000	47.66	-0.57	47.09	74.00	-26.91	Peak
6	2495.0000	34.70	-0.57	34.13	54.00	-19.87	AVG
7	2987.5000	45.98	1.91	47.89	74.00	-26.11	Peak
8	2987.5000	32.77	1.91	34.68	54.00	-19.32	AVG
9	3865.0000	42.16	3.67	45.83	74.00	-28.17	Peak
10	3865.0000	29.87	3.67	33.54	54.00	-20.46	AVG
11	4977.5000	42.23	6.31	48.54	74.00	-25.46	Peak
12	4977.5000	29.77	6.31	36.08	54.00	-17.92	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY(EUT WITH PC)+IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Trey Chen		

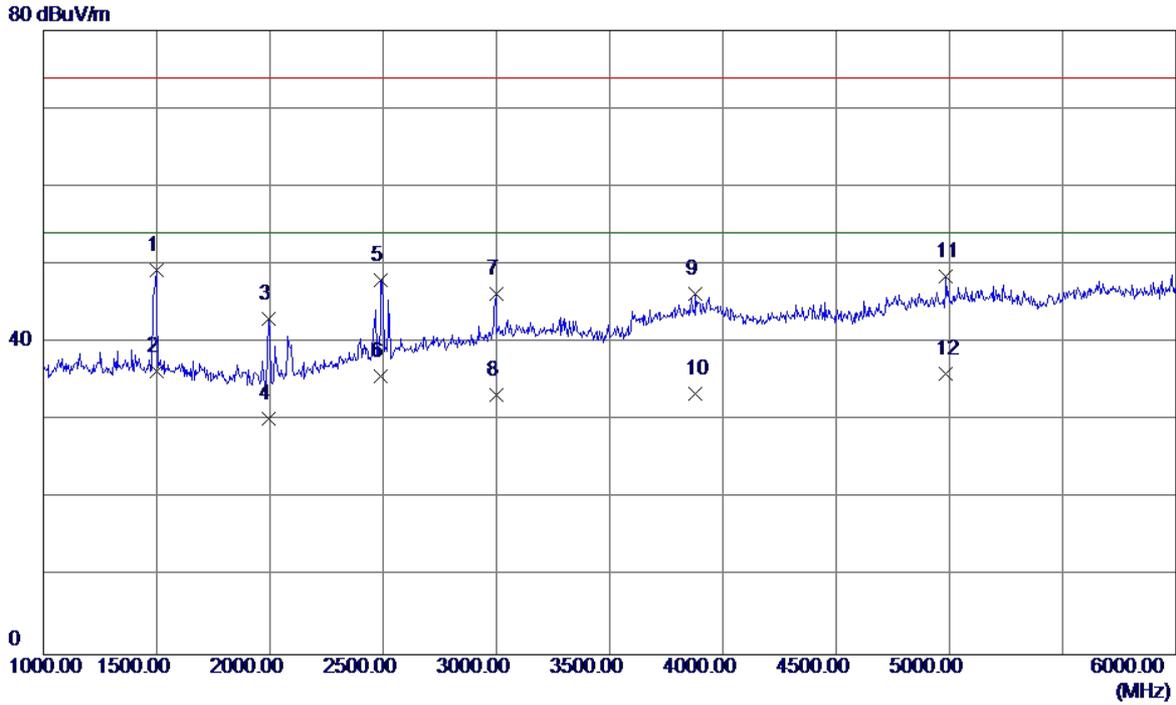


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1497.5000	51.97	-2.76	49.21	74.00	-24.79	Peak
2 *	1497.5000	39.12	-2.76	36.36	54.00	-17.64	AVG
3	1992.5000	47.03	-4.04	42.99	74.00	-31.01	Peak
4	1992.5000	34.30	-4.04	30.26	54.00	-23.74	AVG
5	2490.0000	48.64	-0.61	48.03	74.00	-25.97	Peak
6	2490.0000	36.28	-0.61	35.67	54.00	-18.33	AVG
7	2997.5000	44.21	1.96	46.17	74.00	-27.83	Peak
8	2997.5000	31.30	1.96	33.26	54.00	-20.74	AVG
9	3880.0000	42.50	3.72	46.22	74.00	-27.78	Peak
10	3880.0000	29.69	3.72	33.41	54.00	-20.59	AVG
11	4985.0000	42.12	6.33	48.45	74.00	-25.55	Peak
12	4985.0000	29.71	6.33	36.04	54.00	-17.96	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:BYD+USB Cable:HONGLIN Battery:SUNWODA		
Test Engineer	Trey Chen		

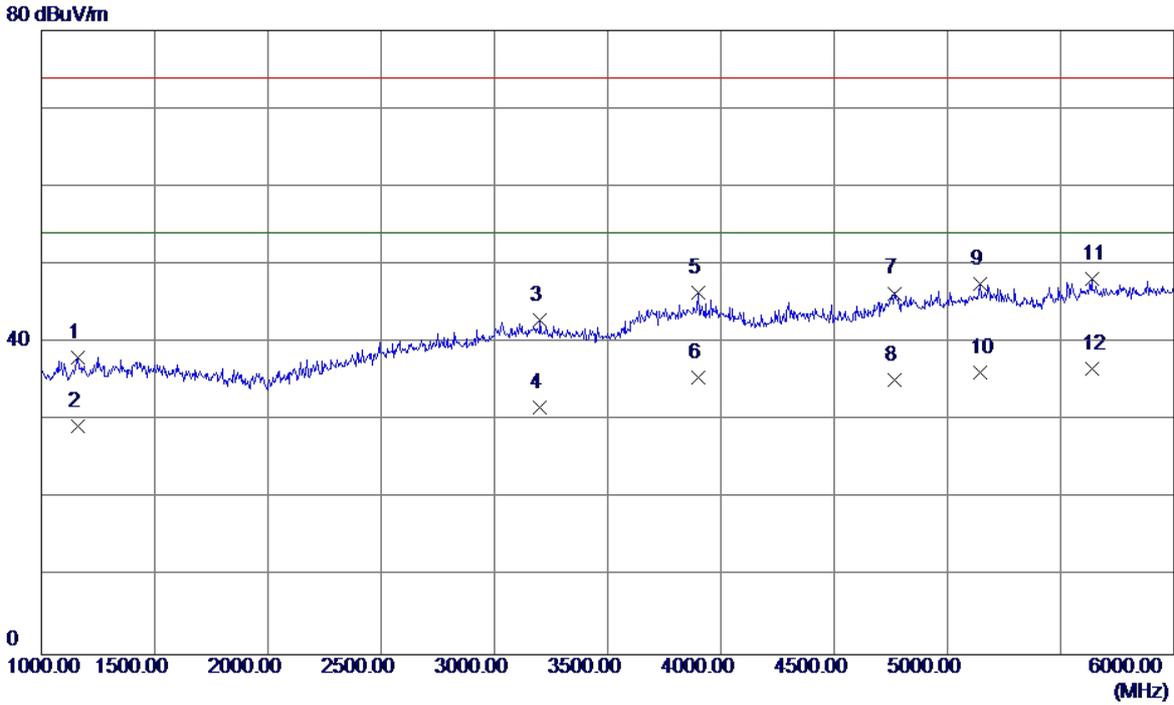


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1160.0000	41.13	-3.09	38.04	74.00	-35.96	Peak
2	1160.0000	32.40	-3.09	29.31	54.00	-24.69	AVG
3	3202.5000	40.77	2.16	42.93	74.00	-31.07	Peak
4	3202.5000	29.51	2.16	31.67	54.00	-22.33	AVG
5	3900.0000	42.56	3.78	46.34	74.00	-27.66	Peak
6	3900.0000	31.68	3.78	35.46	54.00	-18.54	AVG
7	4767.5000	40.78	5.54	46.32	74.00	-27.68	Peak
8	4767.5000	29.60	5.54	35.14	54.00	-18.86	AVG
9	5142.5000	40.66	6.88	47.54	74.00	-26.46	Peak
10	5142.5000	29.33	6.88	36.21	54.00	-17.79	AVG
11	5637.5000	40.01	8.21	48.22	74.00	-25.78	Peak
12 *	5637.5000	28.36	8.21	36.57	54.00	-17.43	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:BYD+USB Cable:HONGLIN Battery:SUNWODA		
Test Engineer	Trey Chen		

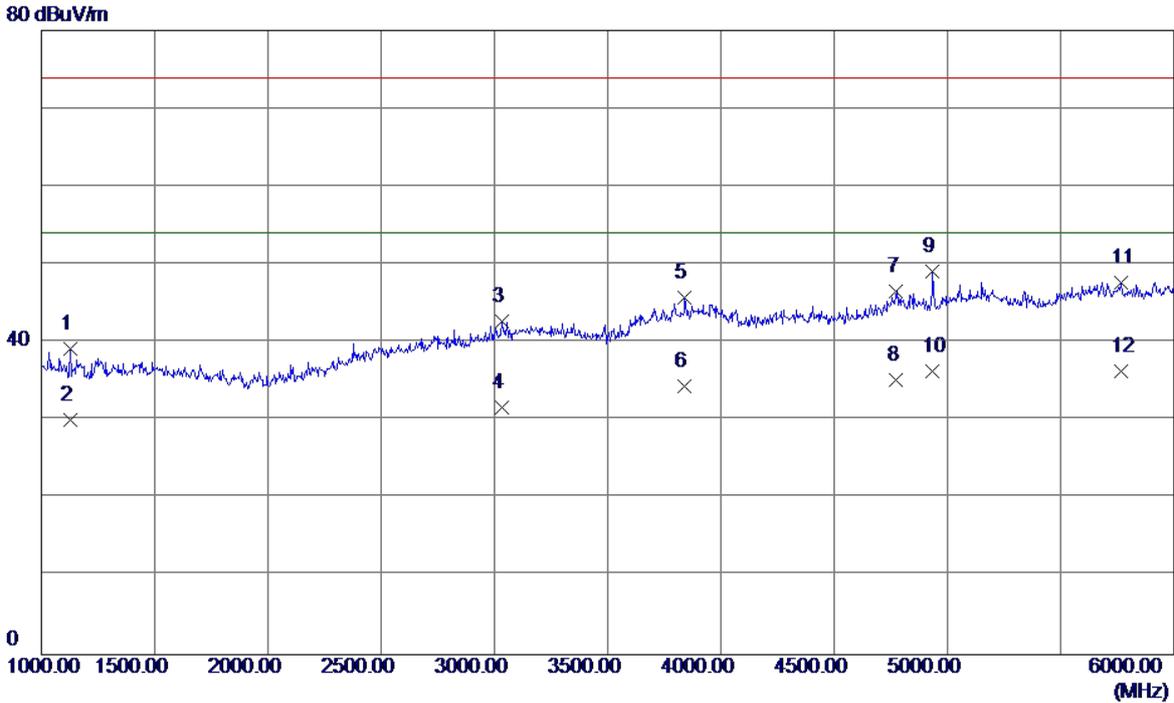


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1127.5000	42.39	-3.12	39.27	74.00	-34.73	Peak
2	1127.5000	33.25	-3.12	30.13	54.00	-23.87	AVG
3	3032.5000	40.71	2.00	42.71	74.00	-31.29	Peak
4	3032.5000	29.67	2.00	31.67	54.00	-22.33	AVG
5	3840.0000	42.12	3.58	45.70	74.00	-28.30	Peak
6	3840.0000	30.80	3.58	34.38	54.00	-19.62	AVG
7	4775.0000	41.03	5.56	46.59	74.00	-27.41	Peak
8	4775.0000	29.70	5.56	35.26	54.00	-18.74	AVG
9	4935.0000	42.92	6.15	49.07	74.00	-24.93	Peak
10	4935.0000	30.11	6.15	36.26	54.00	-17.74	AVG
11	5767.5000	39.43	8.31	47.74	74.00	-26.26	Peak
12 *	5767.5000	28.06	8.31	36.37	54.00	-17.63	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)		
Test Engineer	Trey Chen		

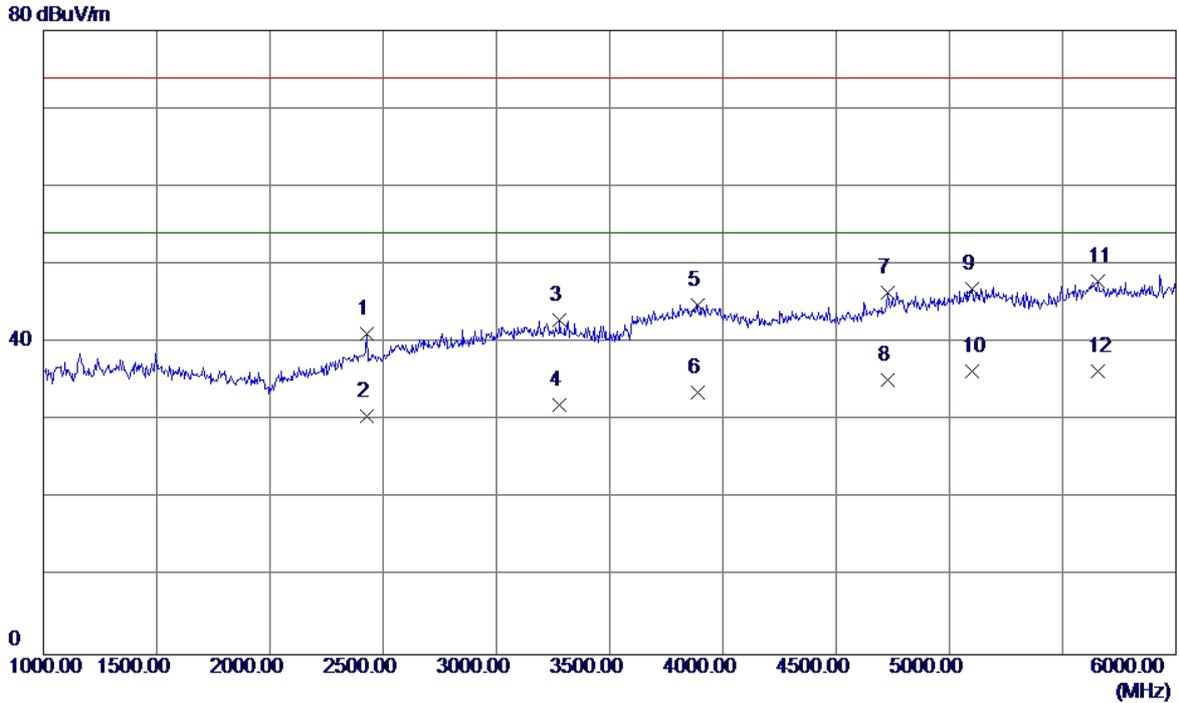


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2427.5000	42.21	-1.05	41.16	74.00	-32.84	Peak
2	2427.5000	31.57	-1.05	30.52	54.00	-23.48	AVG
3	3280.0000	40.64	2.23	42.87	74.00	-31.13	Peak
4	3280.0000	29.78	2.23	32.01	54.00	-21.99	AVG
5	3887.5000	41.10	3.74	44.84	74.00	-29.16	Peak
6	3887.5000	29.88	3.74	33.62	54.00	-20.38	AVG
7	4730.0000	41.05	5.40	46.45	74.00	-27.55	Peak
8	4730.0000	29.87	5.40	35.27	54.00	-18.73	AVG
9	5102.5000	40.20	6.74	46.94	74.00	-27.06	Peak
10 *	5102.5000	29.60	6.74	36.34	54.00	-17.66	AVG
11	5655.0000	39.58	8.22	47.80	74.00	-26.20	Peak
12	5655.0000	28.09	8.22	36.31	54.00	-17.69	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)		
Test Engineer	Trey Chen		

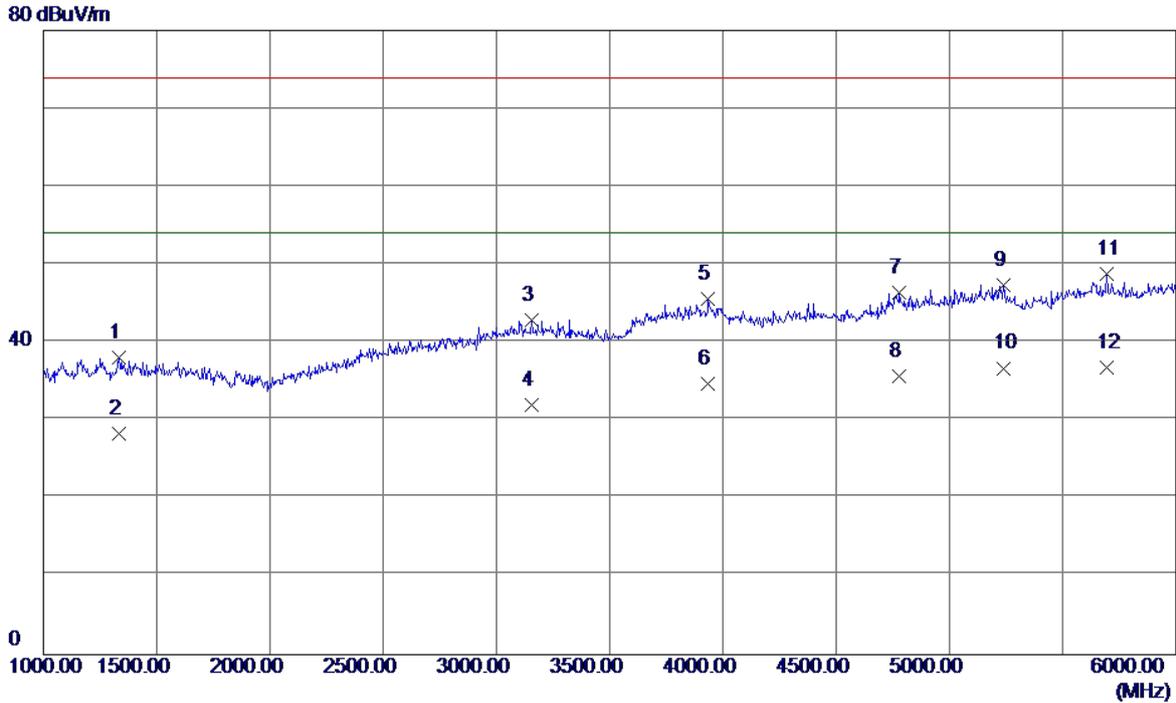


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1332.5000	40.97	-2.92	38.05	74.00	-35.95	Peak
2	1332.5000	31.23	-2.92	28.31	54.00	-25.69	AVG
3	3155.0000	40.80	2.11	42.91	74.00	-31.09	Peak
4	3155.0000	29.94	2.11	32.05	54.00	-21.95	AVG
5	3935.0000	41.69	3.90	45.59	74.00	-28.41	Peak
6	3935.0000	30.78	3.90	34.68	54.00	-19.32	AVG
7	4780.0000	40.79	5.58	46.37	74.00	-27.63	Peak
8	4780.0000	30.06	5.58	35.64	54.00	-18.36	AVG
9	5240.0000	40.12	7.21	47.33	74.00	-26.67	Peak
10	5240.0000	29.51	7.21	36.72	54.00	-17.28	AVG
11	5695.0000	40.53	8.25	48.78	74.00	-25.22	Peak
12 *	5695.0000	28.57	8.25	36.82	54.00	-17.18	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)		
Test Engineer	Trey Chen		

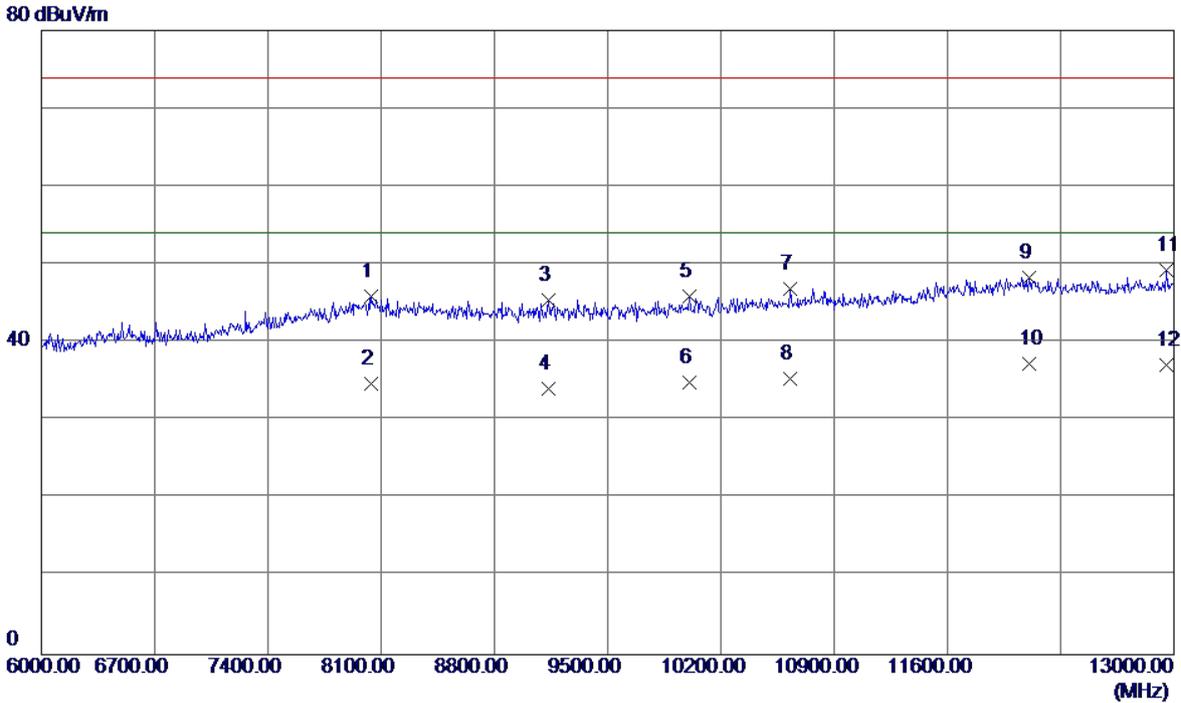


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	8040.5000	31.61	14.26	45.87	74.00	-28.13	Peak
2	8040.5000	20.43	14.26	34.69	54.00	-19.31	AVG
3	9132.5000	31.46	13.98	45.44	74.00	-28.56	Peak
4	9132.5000	20.05	13.98	34.03	54.00	-19.97	AVG
5	10007.5000	31.37	14.51	45.88	74.00	-28.12	Peak
6	10007.5000	20.41	14.51	34.92	54.00	-19.08	AVG
7	10630.5000	30.87	15.95	46.82	74.00	-27.18	Peak
8	10630.5000	19.41	15.95	35.36	54.00	-18.64	AVG
9	12107.5000	29.49	18.81	48.30	74.00	-25.70	Peak
10 *	12107.5000	18.40	18.81	37.21	54.00	-16.79	AVG
11	12951.0000	29.71	19.64	49.35	74.00	-24.65	Peak
12	12951.0000	17.52	19.64	37.16	54.00	-16.84	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)		
Test Engineer	Trey Chen		

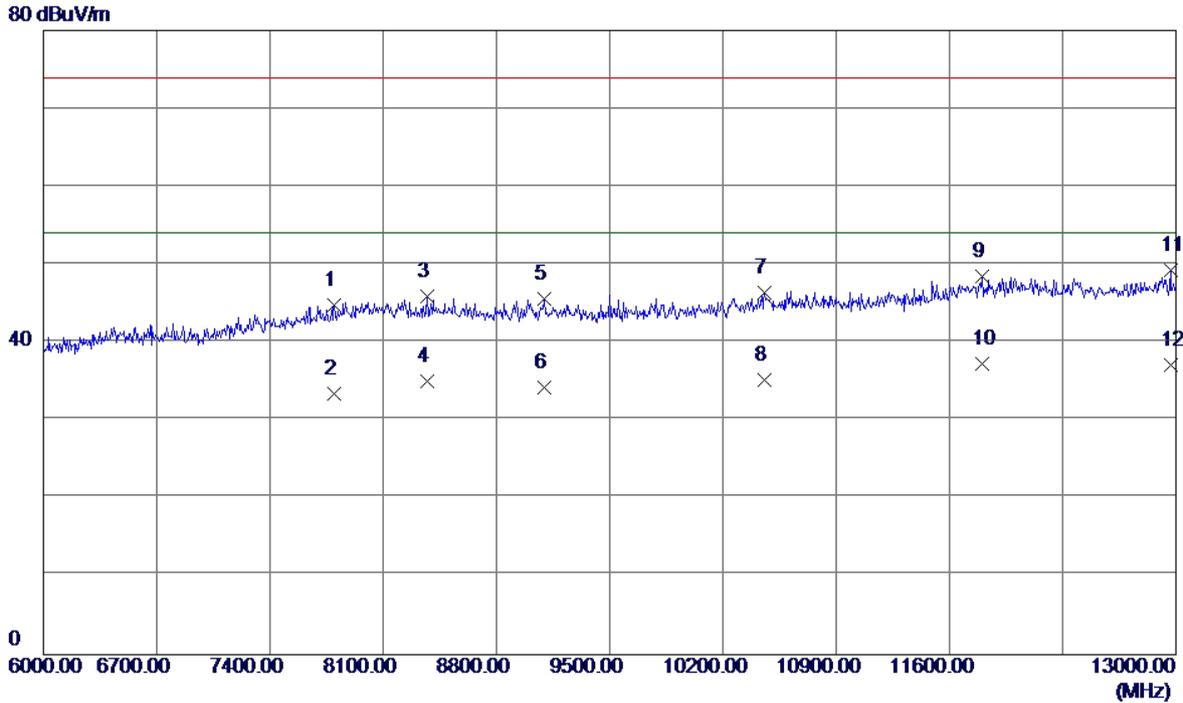


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7799.0000	31.05	13.68	44.73	74.00	-29.27	Peak
2	7799.0000	19.78	13.68	33.46	54.00	-20.54	AVG
3	8373.0000	31.88	14.09	45.97	74.00	-28.03	Peak
4	8373.0000	20.97	14.09	35.06	54.00	-18.94	AVG
5	9097.5000	31.70	13.97	45.67	74.00	-28.33	Peak
6	9097.5000	20.29	13.97	34.26	54.00	-19.74	AVG
7	10459.0000	30.59	15.76	46.35	74.00	-27.65	Peak
8	10459.0000	19.38	15.76	35.14	54.00	-18.86	AVG
9	11803.0000	30.17	18.31	48.48	74.00	-25.52	Peak
10 *	11803.0000	18.90	18.31	37.21	54.00	-16.79	AVG
11	12968.5000	29.63	19.68	49.31	74.00	-24.69	Peak
12	12968.5000	17.38	19.68	37.06	54.00	-16.94	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(LG)		
Test Engineer	Trey Chen		

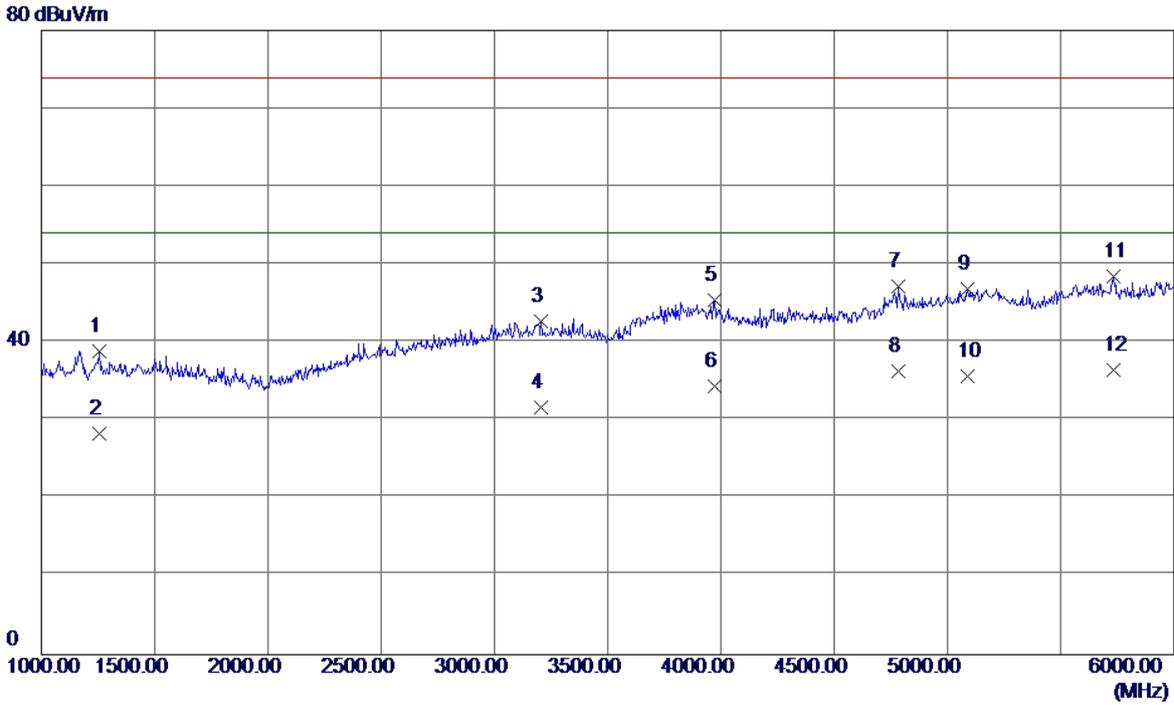


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1255.0000	41.92	-3.00	38.92	74.00	-35.08	Peak
2	1255.0000	31.37	-3.00	28.37	54.00	-25.63	AVG
3	3207.5000	40.49	2.16	42.65	74.00	-31.35	Peak
4	3207.5000	29.56	2.16	31.72	54.00	-22.28	AVG
5	3970.0000	41.37	4.02	45.39	74.00	-28.61	Peak
6	3970.0000	30.45	4.02	34.47	54.00	-19.53	AVG
7	4785.0000	41.67	5.60	47.27	74.00	-26.73	Peak
8	4785.0000	30.76	5.60	36.36	54.00	-17.64	AVG
9	5087.5000	40.20	6.69	46.89	74.00	-27.11	Peak
10	5087.5000	28.93	6.69	35.62	54.00	-18.38	AVG
11	5732.5000	40.16	8.28	48.44	74.00	-25.56	Peak
12 *	5732.5000	28.24	8.28	36.52	54.00	-17.48	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(LG)		
Test Engineer	Trey Chen		

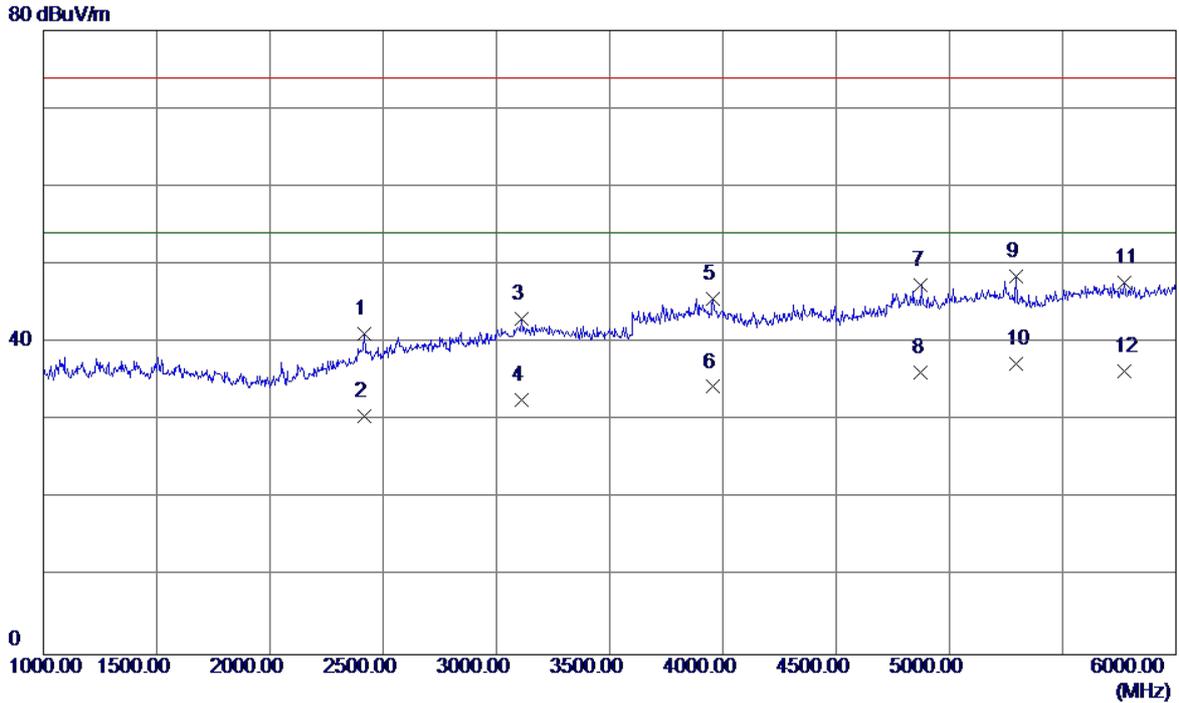


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2417.5000	42.27	-1.12	41.15	74.00	-32.85	Peak
2	2417.5000	31.74	-1.12	30.62	54.00	-23.38	AVG
3	3112.5000	40.95	2.07	43.02	74.00	-30.98	Peak
4	3112.5000	30.50	2.07	32.57	54.00	-21.43	AVG
5	3957.5000	41.68	3.98	45.66	74.00	-28.34	Peak
6	3957.5000	30.34	3.98	34.32	54.00	-19.68	AVG
7	4875.0000	41.46	5.93	47.39	74.00	-26.61	Peak
8	4875.0000	30.21	5.93	36.14	54.00	-17.86	AVG
9	5295.0000	41.06	7.40	48.46	74.00	-25.54	Peak
10 *	5295.0000	29.84	7.40	37.24	54.00	-16.76	AVG
11	5770.0000	39.36	8.31	47.67	74.00	-26.33	Peak
12	5770.0000	27.95	8.31	36.26	54.00	-17.74	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:HONGLIN Battery:DESAY		
Test Engineer	Trey Chen		

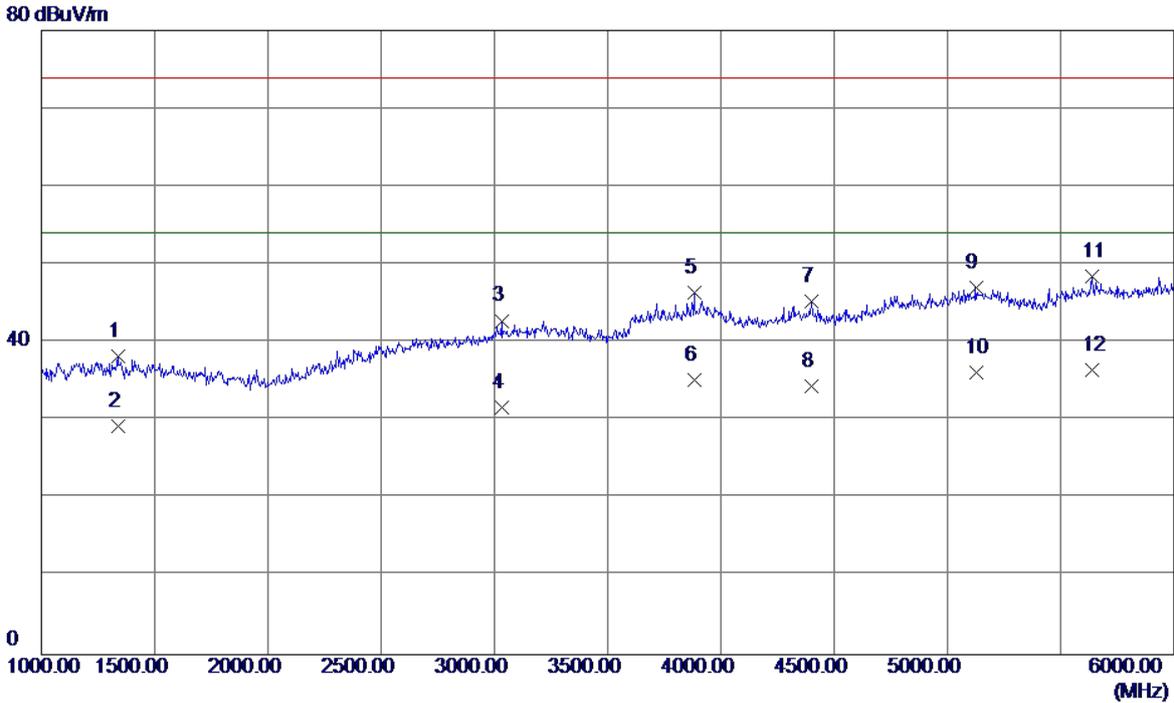


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1337.5000	41.22	-2.92	38.30	74.00	-35.70	Peak
2	1337.5000	32.23	-2.92	29.31	54.00	-24.69	AVG
3	3032.5000	40.80	2.00	42.80	74.00	-31.20	Peak
4	3032.5000	29.62	2.00	31.62	54.00	-22.38	AVG
5	3882.5000	42.68	3.72	46.40	74.00	-27.60	Peak
6	3882.5000	31.54	3.72	35.26	54.00	-18.74	AVG
7	4400.0000	40.86	4.47	45.33	74.00	-28.67	Peak
8	4400.0000	29.94	4.47	34.41	54.00	-19.59	AVG
9	5125.0000	40.27	6.82	47.09	74.00	-26.91	Peak
10	5125.0000	29.35	6.82	36.17	54.00	-17.83	AVG
11	5637.5000	40.22	8.21	48.43	74.00	-25.57	Peak
12 *	5637.5000	28.29	8.21	36.50	54.00	-17.50	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+BT+ WIFI+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:HONGLIN Battery:DESAY		
Test Engineer	Trey Chen		

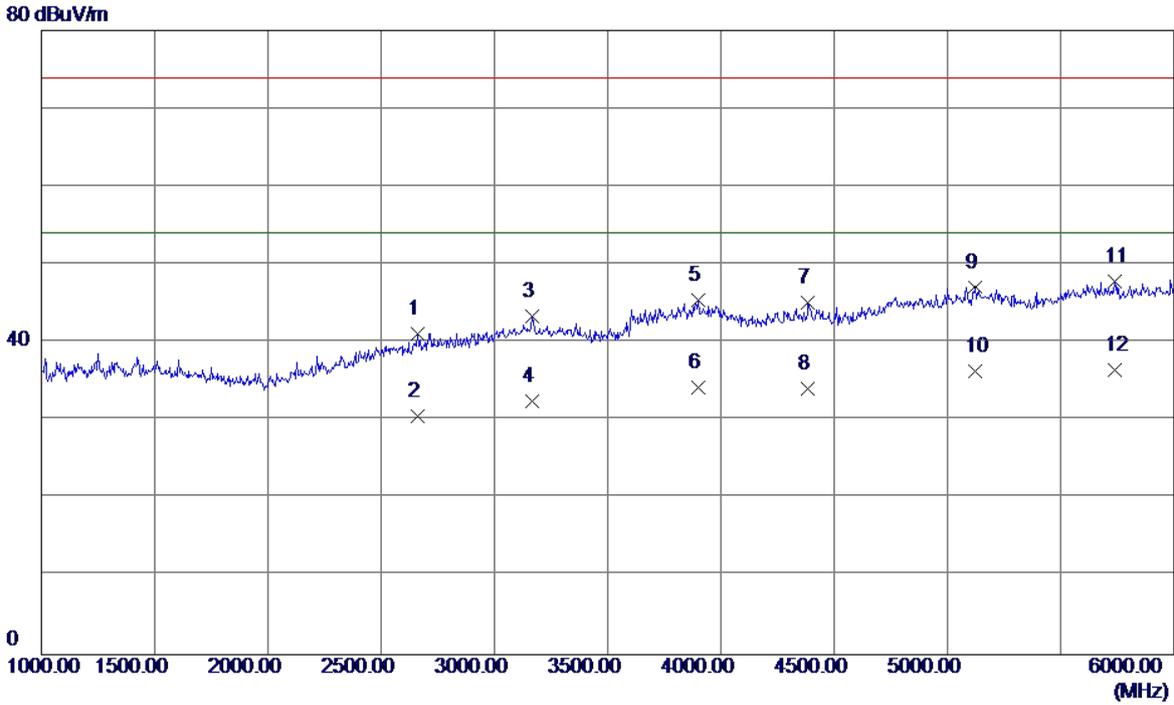


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2660.0000	40.89	0.27	41.16	74.00	-32.84	Peak
2	2660.0000	30.26	0.27	30.53	54.00	-23.47	AVG
3	3167.5000	41.26	2.13	43.39	74.00	-30.61	Peak
4	3167.5000	30.33	2.13	32.46	54.00	-21.54	AVG
5	3900.0000	41.62	3.78	45.40	74.00	-28.60	Peak
6	3900.0000	30.48	3.78	34.26	54.00	-19.74	AVG
7	4385.0000	40.67	4.46	45.13	74.00	-28.87	Peak
8	4385.0000	29.57	4.46	34.03	54.00	-19.97	AVG
9	5120.0000	40.32	6.80	47.12	74.00	-26.88	Peak
10	5120.0000	29.54	6.80	36.34	54.00	-17.66	AVG
11	5740.0000	39.52	8.29	47.81	74.00	-26.19	Peak
12 *	5740.0000	28.16	8.29	36.45	54.00	-17.55	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)		
Test Engineer	Trey Chen		

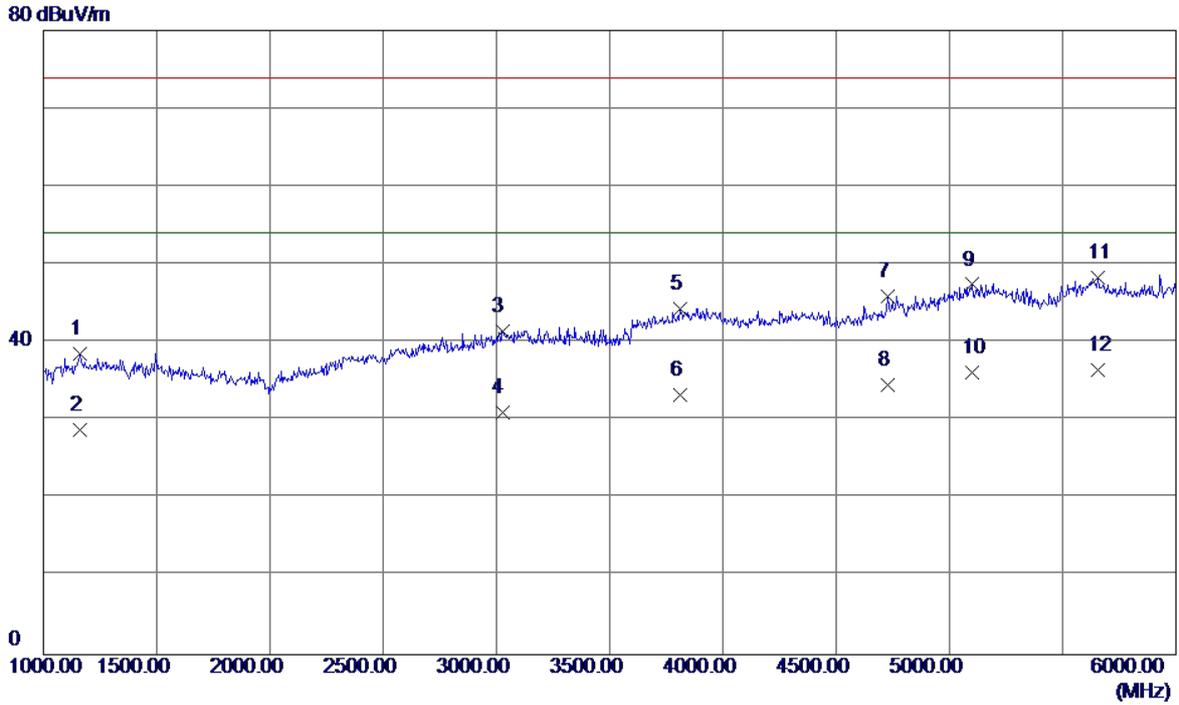


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1162.5000	41.71	-3.08	38.63	74.00	-35.37	Peak
2	1162.5000	31.87	-3.08	28.79	54.00	-25.21	AVG
3	3025.0000	39.45	1.99	41.44	74.00	-32.56	Peak
4	3025.0000	29.02	1.99	31.01	54.00	-22.99	AVG
5	3812.5000	40.86	3.49	44.35	74.00	-29.65	Peak
6	3812.5000	29.77	3.49	33.26	54.00	-20.74	AVG
7	4730.0000	40.55	5.40	45.95	74.00	-28.05	Peak
8	4730.0000	29.16	5.40	34.56	54.00	-19.44	AVG
9	5102.5000	40.70	6.74	47.44	74.00	-26.56	Peak
10	5102.5000	29.37	6.74	36.11	54.00	-17.89	AVG
11	5655.0000	40.08	8.22	48.30	74.00	-25.70	Peak
12 *	5655.0000	28.20	8.22	36.42	54.00	-17.58	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)		
Test Engineer	Trey Chen		

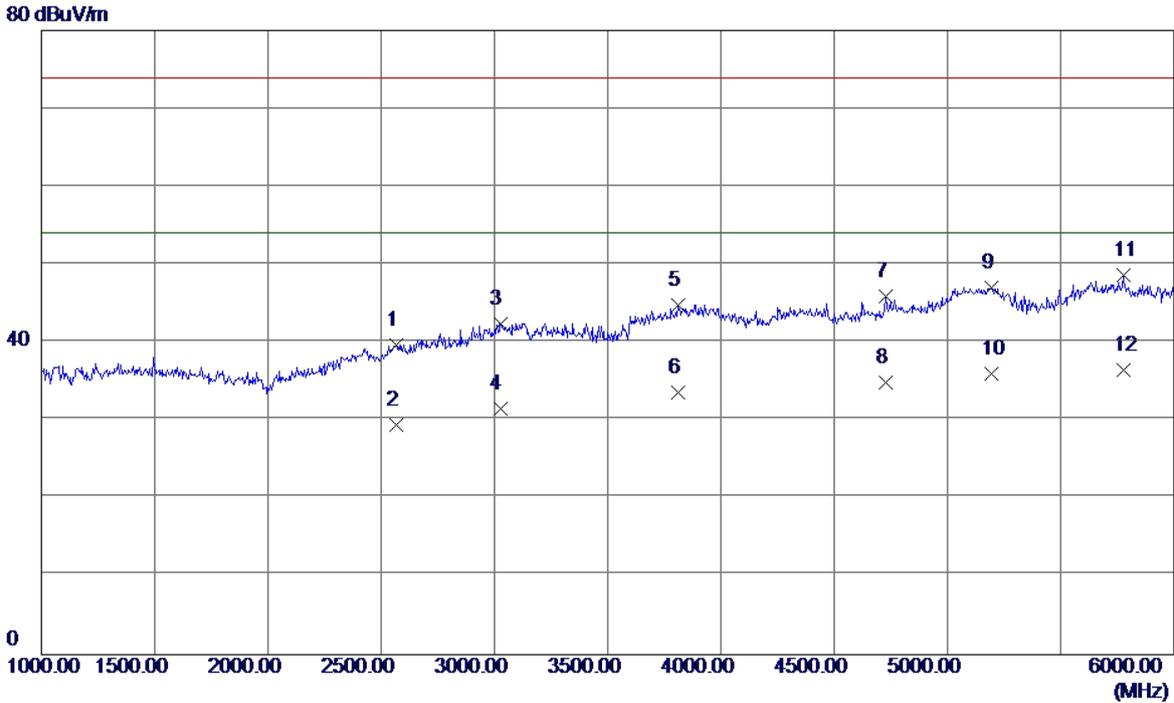


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2567.5000	39.96	-0.20	39.76	74.00	-34.24	Peak
2	2567.5000	29.58	-0.20	29.38	54.00	-24.62	AVG
3	3025.0000	40.45	1.99	42.44	74.00	-31.56	Peak
4	3025.0000	29.57	1.99	31.56	54.00	-22.44	AVG
5	3812.5000	41.36	3.49	44.85	74.00	-29.15	Peak
6	3812.5000	30.15	3.49	33.64	54.00	-20.36	AVG
7	4730.0000	40.55	5.40	45.95	74.00	-28.05	Peak
8	4730.0000	29.41	5.40	34.81	54.00	-19.19	AVG
9	5192.5000	40.00	7.05	47.05	74.00	-26.95	Peak
10	5192.5000	28.89	7.05	35.94	54.00	-18.06	AVG
11	5777.5000	40.34	8.32	48.66	74.00	-25.34	Peak
12 *	5777.5000	28.22	8.32	36.54	54.00	-17.46	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)+Earphone:Quancheng		
Test Engineer	Trey Chen		

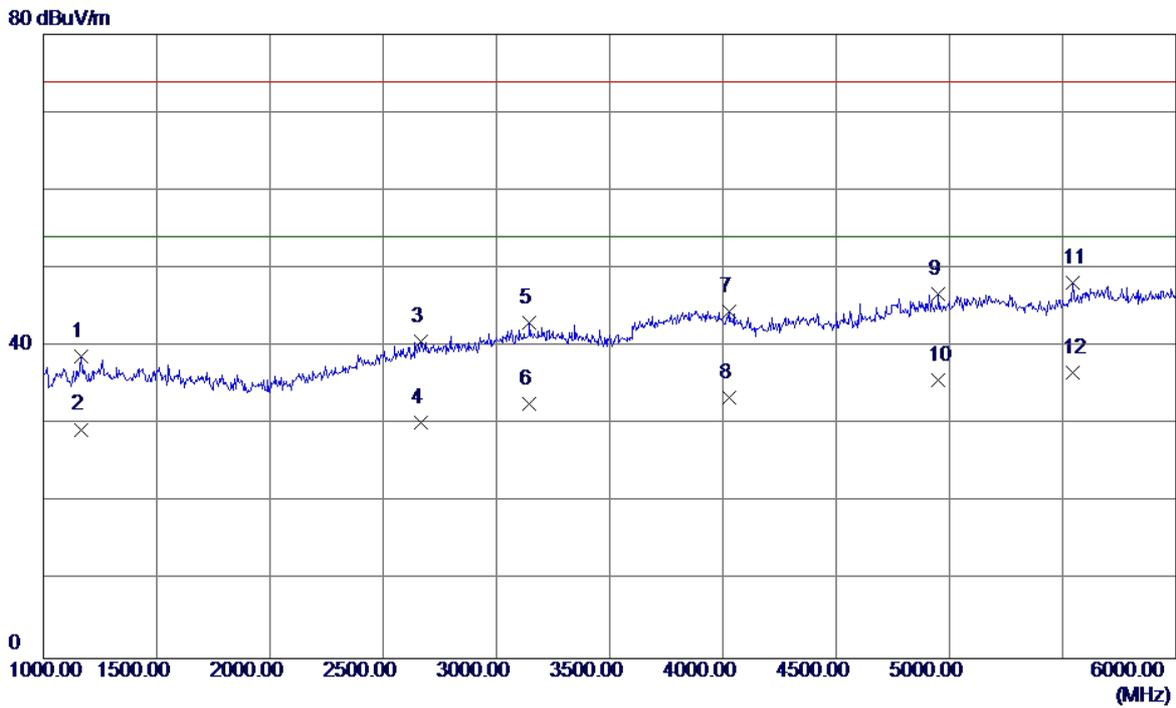


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1167.5000	41.75	-3.08	38.67	74.00	-35.33	Peak
2	1167.5000	32.44	-3.08	29.36	54.00	-24.64	AVG
3	2667.5000	40.29	0.30	40.59	74.00	-33.41	Peak
4	2667.5000	29.94	0.30	30.24	54.00	-23.76	AVG
5	3145.0000	40.93	2.10	43.03	74.00	-30.97	Peak
6	3145.0000	30.51	2.10	32.61	54.00	-21.39	AVG
7	4030.0000	40.37	4.15	44.52	74.00	-29.48	Peak
8	4030.0000	29.27	4.15	33.42	54.00	-20.58	AVG
9	4952.5000	40.43	6.22	46.65	74.00	-27.35	Peak
10	4952.5000	29.49	6.22	35.71	54.00	-18.29	AVG
11	5545.0000	40.09	8.13	48.22	74.00	-25.78	Peak
12 *	5545.0000	28.52	8.13	36.65	54.00	-17.35	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)+Earphone:Quancheng		
Test Engineer	Trey Chen		

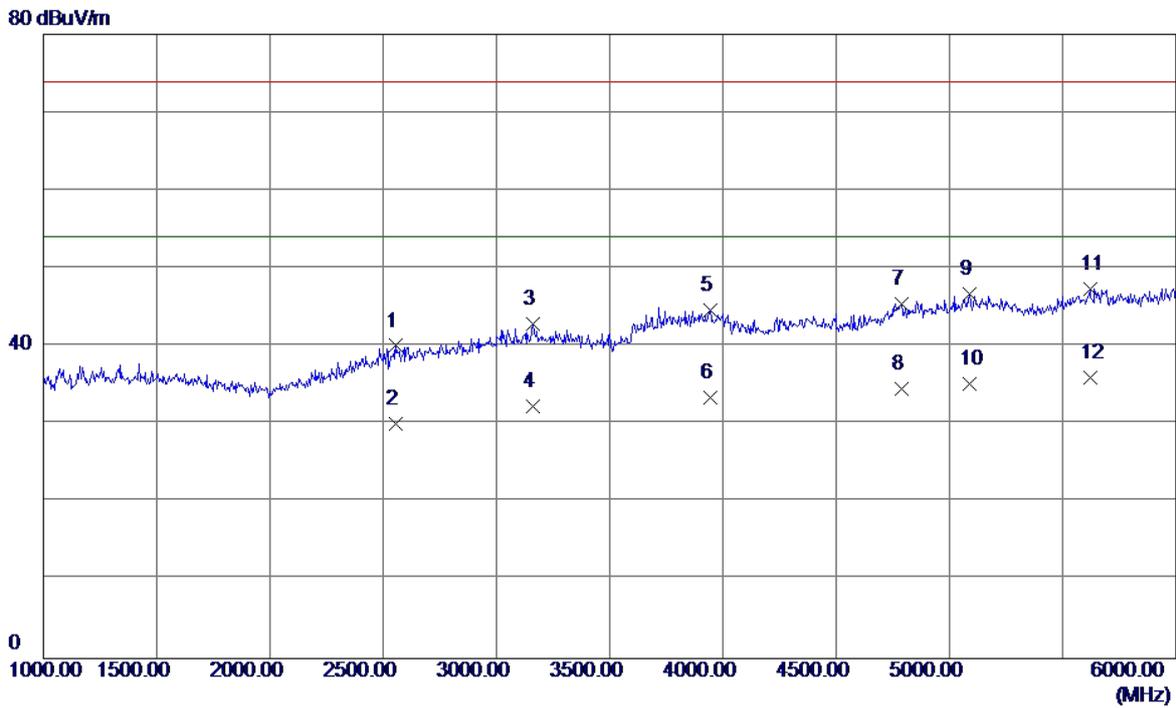


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2557.5000	40.33	-0.25	40.08	74.00	-33.92	Peak
2	2557.5000	30.36	-0.25	30.11	54.00	-23.89	AVG
3	3162.5000	40.82	2.12	42.94	74.00	-31.06	Peak
4	3162.5000	30.14	2.12	32.26	54.00	-21.74	AVG
5	3942.5000	40.78	3.93	44.71	74.00	-29.29	Peak
6	3942.5000	29.47	3.93	33.40	54.00	-20.60	AVG
7	4787.5000	39.80	5.61	45.41	74.00	-28.59	Peak
8	4787.5000	28.95	5.61	34.56	54.00	-19.44	AVG
9	5087.5000	39.99	6.69	46.68	74.00	-27.32	Peak
10	5087.5000	28.57	6.69	35.26	54.00	-18.74	AVG
11	5620.0000	39.24	8.19	47.43	74.00	-26.57	Peak
12 *	5620.0000	27.82	8.19	36.01	54.00	-17.99	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)+Earphone:Merry		
Test Engineer	Treyy Chen		

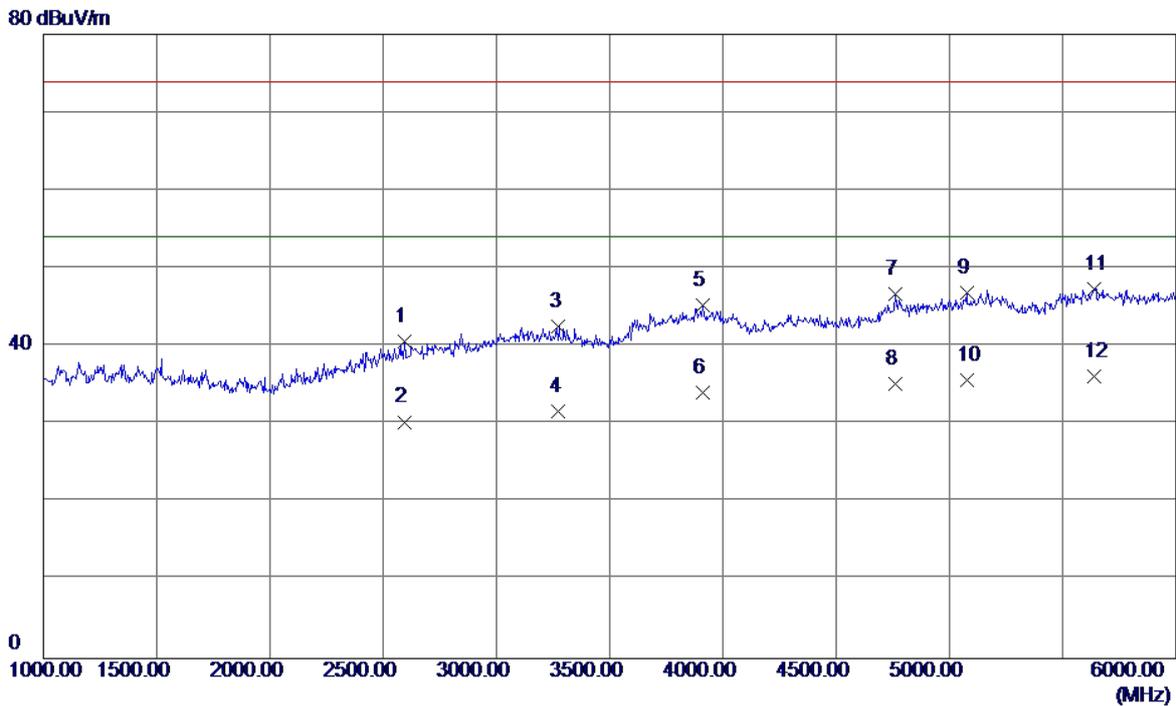


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2595.0000	40.74	-0.06	40.68	74.00	-33.32	Peak
2	2595.0000	30.38	-0.06	30.32	54.00	-23.68	AVG
3	3275.0000	40.31	2.23	42.54	74.00	-31.46	Peak
4	3275.0000	29.39	2.23	31.62	54.00	-22.38	AVG
5	3912.5000	41.39	3.83	45.22	74.00	-28.78	Peak
6	3912.5000	30.23	3.83	34.06	54.00	-19.94	AVG
7	4760.0000	41.26	5.51	46.77	74.00	-27.23	Peak
8	4760.0000	29.76	5.51	35.27	54.00	-18.73	AVG
9	5077.5000	40.30	6.65	46.95	74.00	-27.05	Peak
10	5077.5000	29.00	6.65	35.65	54.00	-18.35	AVG
11	5640.0000	39.19	8.21	47.40	74.00	-26.60	Peak
12 *	5640.0000	27.97	8.21	36.18	54.00	-17.82	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)+Earphone:Merry		
Test Engineer	Treyy Chen		

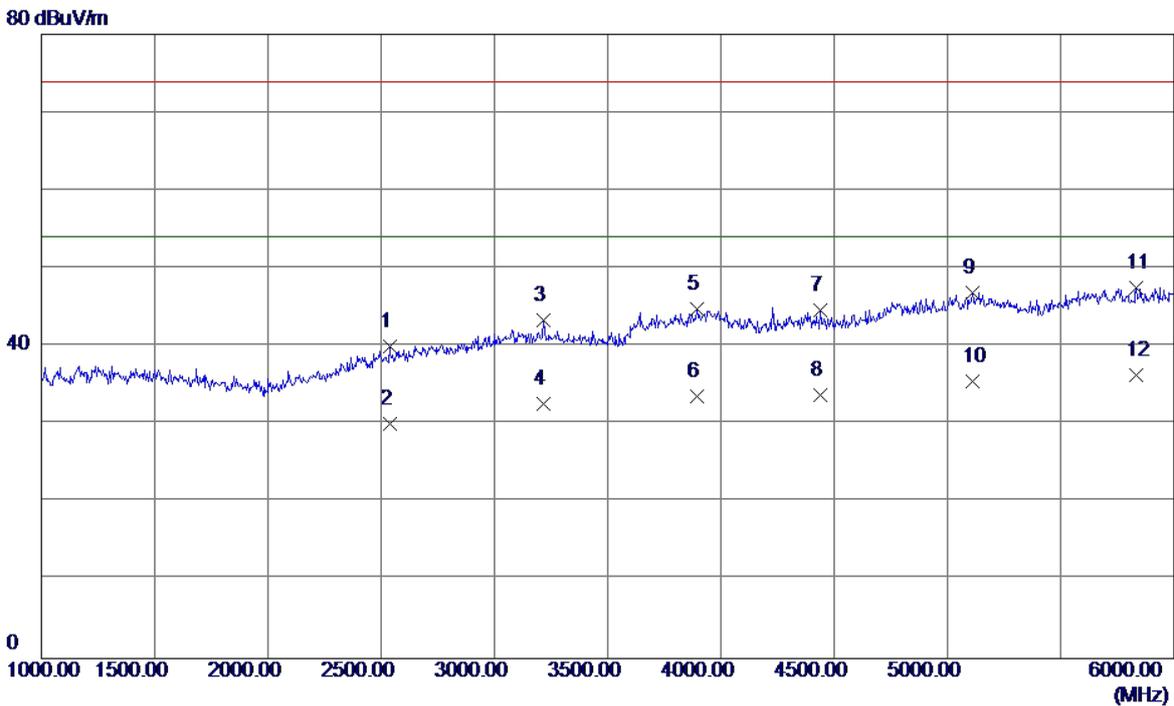


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2537.5000	40.41	-0.35	40.06	74.00	-33.94	Peak
2	2537.5000	30.48	-0.35	30.13	54.00	-23.87	AVG
3	3217.5000	41.15	2.17	43.32	74.00	-30.68	Peak
4	3217.5000	30.48	2.17	32.65	54.00	-21.35	AVG
5	3895.0000	41.04	3.77	44.81	74.00	-29.19	Peak
6	3895.0000	29.76	3.77	33.53	54.00	-20.47	AVG
7	4440.0000	40.08	4.50	44.58	74.00	-29.42	Peak
8	4440.0000	29.19	4.50	33.69	54.00	-20.31	AVG
9	5112.5000	40.15	6.77	46.92	74.00	-27.08	Peak
10	5112.5000	28.77	6.77	35.54	54.00	-18.46	AVG
11	5835.0000	39.12	8.37	47.49	74.00	-26.51	Peak
12 *	5835.0000	27.89	8.37	36.26	54.00	-17.74	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)+Earphone:Lianchuang		
Test Engineer	Treyy Chen		

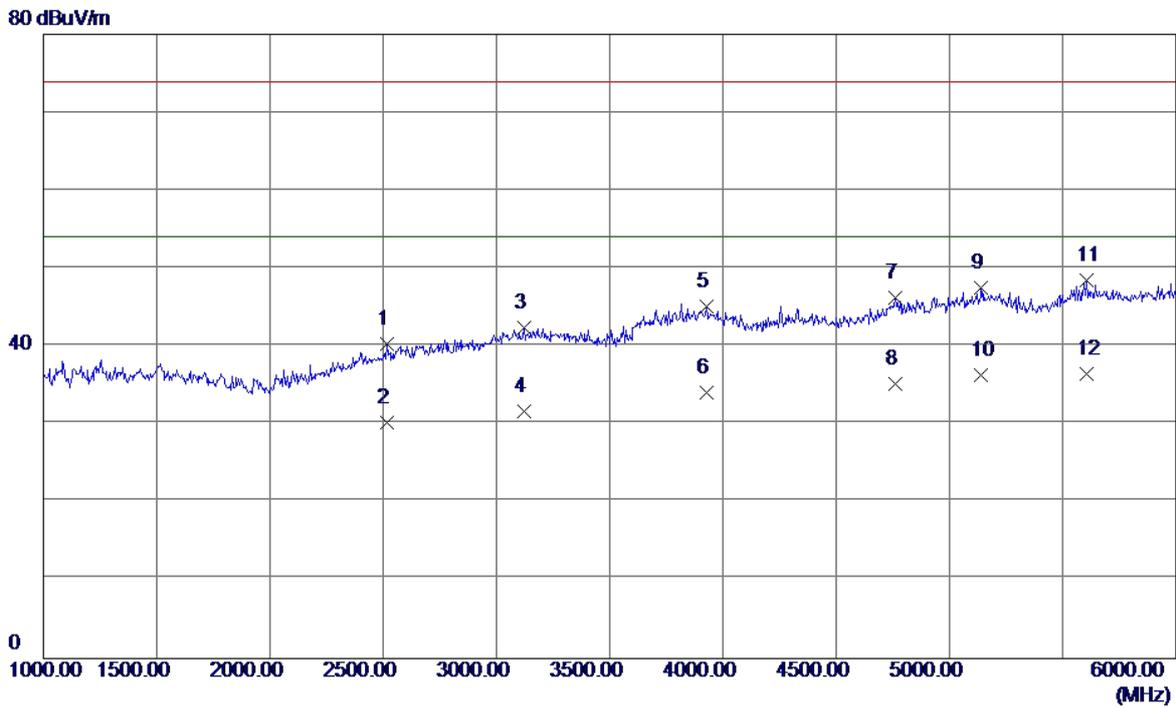


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2517.5000	40.74	-0.45	40.29	74.00	-33.71	Peak
2	2517.5000	30.63	-0.45	30.18	54.00	-23.82	AVG
3	3122.5000	40.34	2.08	42.42	74.00	-31.58	Peak
4	3122.5000	29.57	2.08	31.65	54.00	-22.35	AVG
5	3927.5000	41.29	3.88	45.17	74.00	-28.83	Peak
6	3927.5000	30.20	3.88	34.08	54.00	-19.92	AVG
7	4762.5000	40.67	5.52	46.19	74.00	-27.81	Peak
8	4762.5000	29.71	5.52	35.23	54.00	-18.77	AVG
9	5140.0000	40.65	6.87	47.52	74.00	-26.48	Peak
10	5140.0000	29.39	6.87	36.26	54.00	-17.74	AVG
11	5607.5000	40.31	8.18	48.49	74.00	-25.51	Peak
12 *	5607.5000	28.33	8.18	36.51	54.00	-17.49	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)+Earphone:Lianchuang		
Test Engineer	Trey Chen		

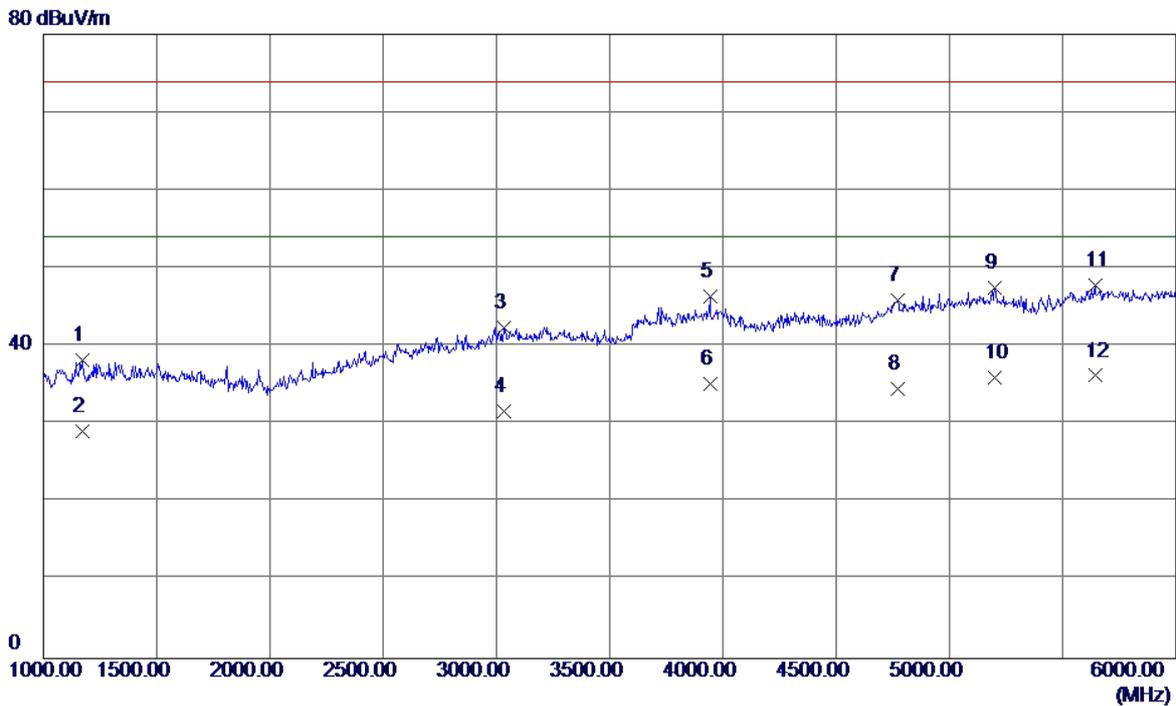


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1170.0000	41.37	-3.08	38.29	74.00	-35.71	Peak
2	1170.0000	32.24	-3.08	29.16	54.00	-24.84	AVG
3	3035.0000	40.47	2.00	42.47	74.00	-31.53	Peak
4	3035.0000	29.64	2.00	31.64	54.00	-22.36	AVG
5	3942.5000	42.52	3.93	46.45	74.00	-27.55	Peak
6	3942.5000	31.33	3.93	35.26	54.00	-18.74	AVG
7	4772.5000	40.30	5.56	45.86	74.00	-28.14	Peak
8	4772.5000	29.06	5.56	34.62	54.00	-19.38	AVG
9	5202.5000	40.37	7.08	47.45	74.00	-26.55	Peak
10	5202.5000	28.92	7.08	36.00	54.00	-18.00	AVG
11	5642.5000	39.66	8.21	47.87	74.00	-26.13	Peak
12 *	5642.5000	28.03	8.21	36.24	54.00	-17.76	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (GSM)		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)		
Test Engineer	Trey Chen		

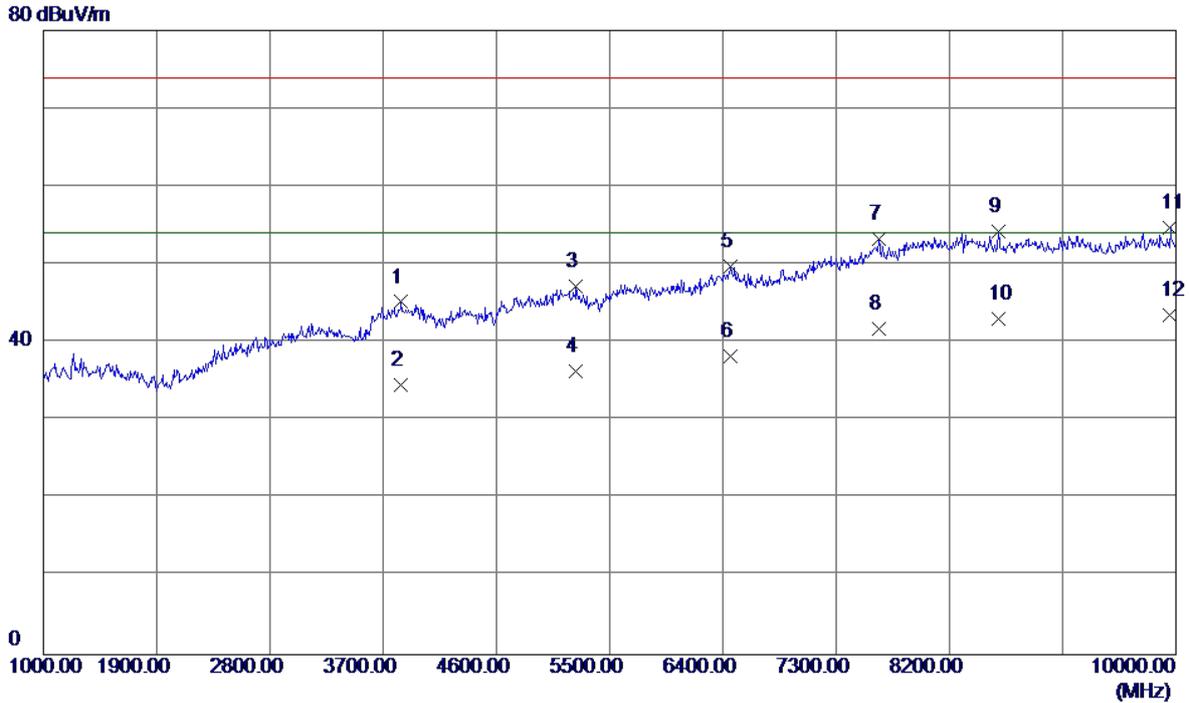


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	3844.0000	41.61	3.59	45.20	74.00	-28.80	Peak
2	3844.0000	30.93	3.59	34.52	54.00	-19.48	AVG
3	5234.5000	39.99	7.19	47.18	74.00	-26.82	Peak
4	5234.5000	29.15	7.19	36.34	54.00	-17.66	AVG
5	6463.0000	39.25	10.48	49.73	74.00	-24.27	Peak
6	6463.0000	27.78	10.48	38.26	54.00	-15.74	AVG
7	7637.5000	40.00	13.20	53.20	74.00	-20.80	Peak
8	7637.5000	28.58	13.20	41.78	54.00	-12.22	AVG
9	8591.5000	40.22	14.01	54.23	74.00	-19.77	Peak
10	8591.5000	29.05	14.01	43.06	54.00	-10.94	AVG
11	9955.0000	40.25	14.46	54.71	74.00	-19.29	Peak
12 *	9955.0000	29.04	14.46	43.50	54.00	-10.50	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (GSM)		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)		
Test Engineer	Trey Chen		

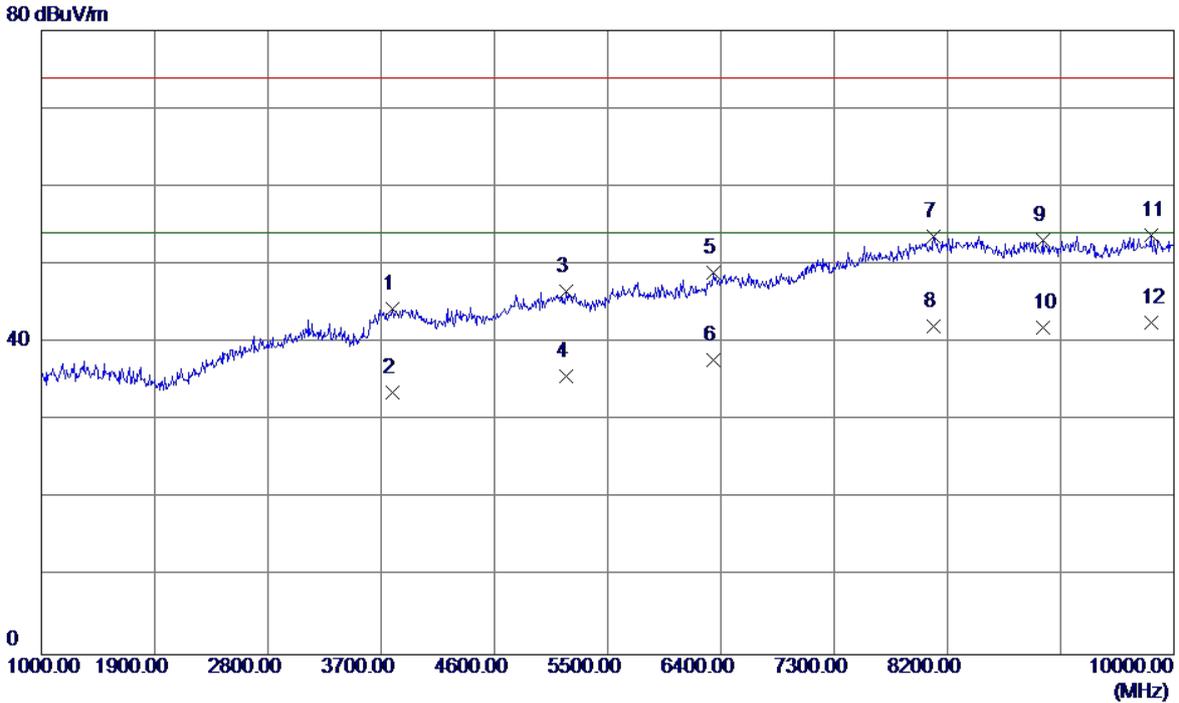


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	3794.5000	40.95	3.43	44.38	74.00	-29.62	Peak
2	3794.5000	30.19	3.43	33.62	54.00	-20.38	AVG
3	5171.5000	39.53	6.97	46.50	74.00	-27.50	Peak
4	5171.5000	28.68	6.97	35.65	54.00	-18.35	AVG
5	6337.0000	39.00	9.94	48.94	74.00	-25.06	Peak
6	6337.0000	27.77	9.94	37.71	54.00	-16.29	AVG
7	8092.0000	39.33	14.23	53.56	74.00	-20.44	Peak
8	8092.0000	27.84	14.23	42.07	54.00	-11.93	AVG
9	8956.0000	39.20	13.94	53.14	74.00	-20.86	Peak
10	8956.0000	27.95	13.94	41.89	54.00	-12.11	AVG
11	9815.5000	39.45	14.35	53.80	74.00	-20.20	Peak
12 *	9815.5000	28.28	14.35	42.63	54.00	-11.37	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)		
Test Engineer	Trey Chen		

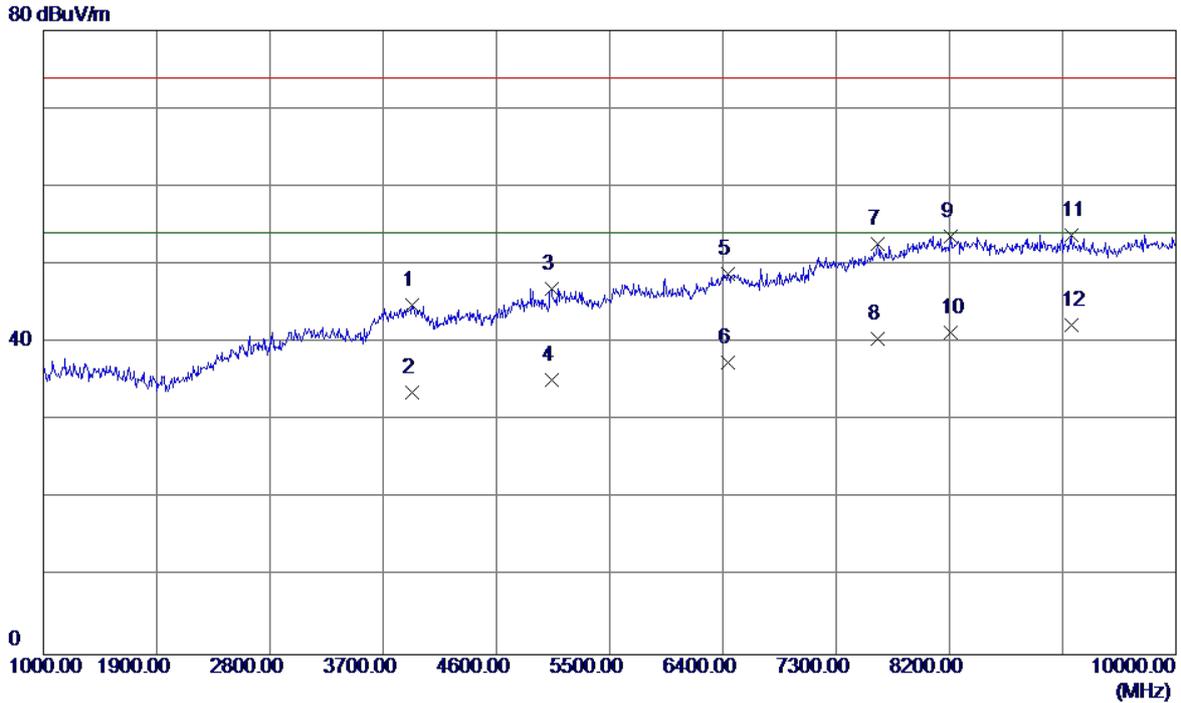


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	3934.0000	40.96	3.90	44.86	74.00	-29.14	Peak
2	3934.0000	29.66	3.90	33.56	54.00	-20.44	AVG
3	5036.5000	40.35	6.51	46.86	74.00	-27.14	Peak
4	5036.5000	28.76	6.51	35.27	54.00	-18.73	AVG
5	6436.0000	38.49	10.36	48.85	74.00	-25.15	Peak
6	6436.0000	27.02	10.36	37.38	54.00	-16.62	AVG
7	7628.5000	39.46	13.17	52.63	74.00	-21.37	Peak
8	7628.5000	27.34	13.17	40.51	54.00	-13.49	AVG
9	8213.5000	39.50	14.17	53.67	74.00	-20.33	Peak
10	8213.5000	27.09	14.17	41.26	54.00	-12.74	AVG
11	9167.5000	39.77	13.99	53.76	74.00	-20.24	Peak
12 *	9167.5000	28.32	13.99	42.31	54.00	-11.69	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)		
Test Engineer	Trey Chen		

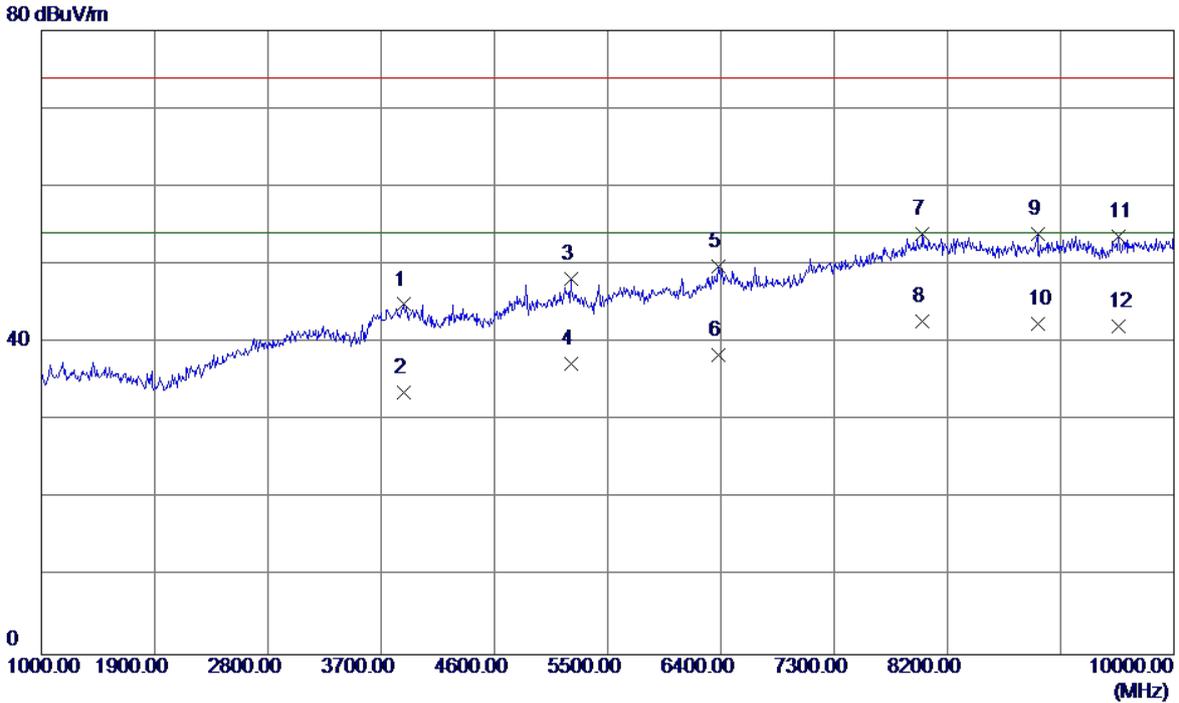


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	3884.5000	41.15	3.73	44.88	74.00	-29.12	Peak
2	3884.5000	29.83	3.73	33.56	54.00	-20.44	AVG
3	5207.5000	40.99	7.10	48.09	74.00	-25.91	Peak
4	5207.5000	30.14	7.10	37.24	54.00	-16.76	AVG
5	6382.0000	39.56	10.13	49.69	74.00	-24.31	Peak
6	6382.0000	28.28	10.13	38.41	54.00	-15.59	AVG
7	8002.0000	39.71	14.28	53.99	74.00	-20.01	Peak
8 *	8002.0000	28.38	14.28	42.66	54.00	-11.34	AVG
9	8915.5000	40.02	13.95	53.97	74.00	-20.03	Peak
10	8915.5000	28.41	13.95	42.36	54.00	-11.64	AVG
11	9563.5000	39.42	14.17	53.59	74.00	-20.41	Peak
12	9563.5000	27.91	14.17	42.08	54.00	-11.92	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)		
Test Engineer	Trey Chen		

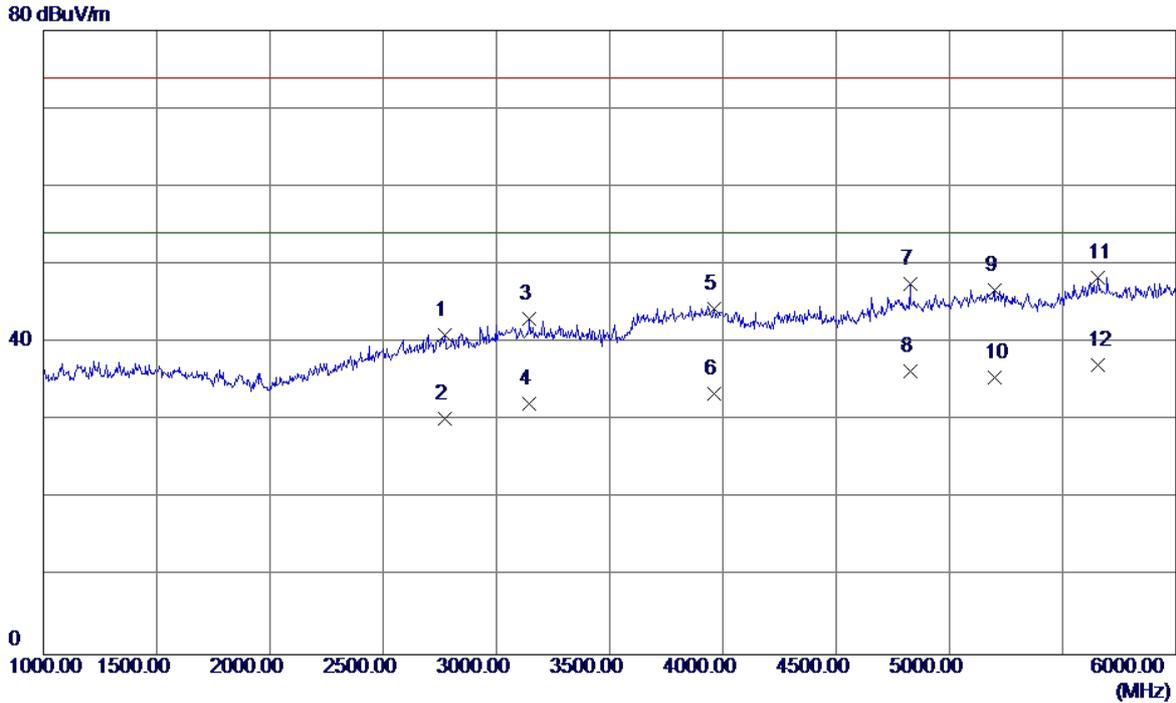


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2772.5000	40.07	0.83	40.90	74.00	-33.10	Peak
2	2772.5000	29.41	0.83	30.24	54.00	-23.76	AVG
3	3145.0000	40.88	2.10	42.98	74.00	-31.02	Peak
4	3145.0000	30.06	2.10	32.16	54.00	-21.84	AVG
5	3960.0000	40.27	3.99	44.26	74.00	-29.74	Peak
6	3960.0000	29.42	3.99	33.41	54.00	-20.59	AVG
7	4827.5000	41.77	5.76	47.53	74.00	-26.47	Peak
8	4827.5000	30.50	5.76	36.26	54.00	-17.74	AVG
9	5197.5000	39.71	7.06	46.77	74.00	-27.23	Peak
10	5197.5000	28.39	7.06	35.45	54.00	-18.55	AVG
11	5657.5000	40.12	8.22	48.34	74.00	-25.66	Peak
12 *	5657.5000	28.84	8.22	37.06	54.00	-16.94	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)		
Test Engineer	Trey Chen		

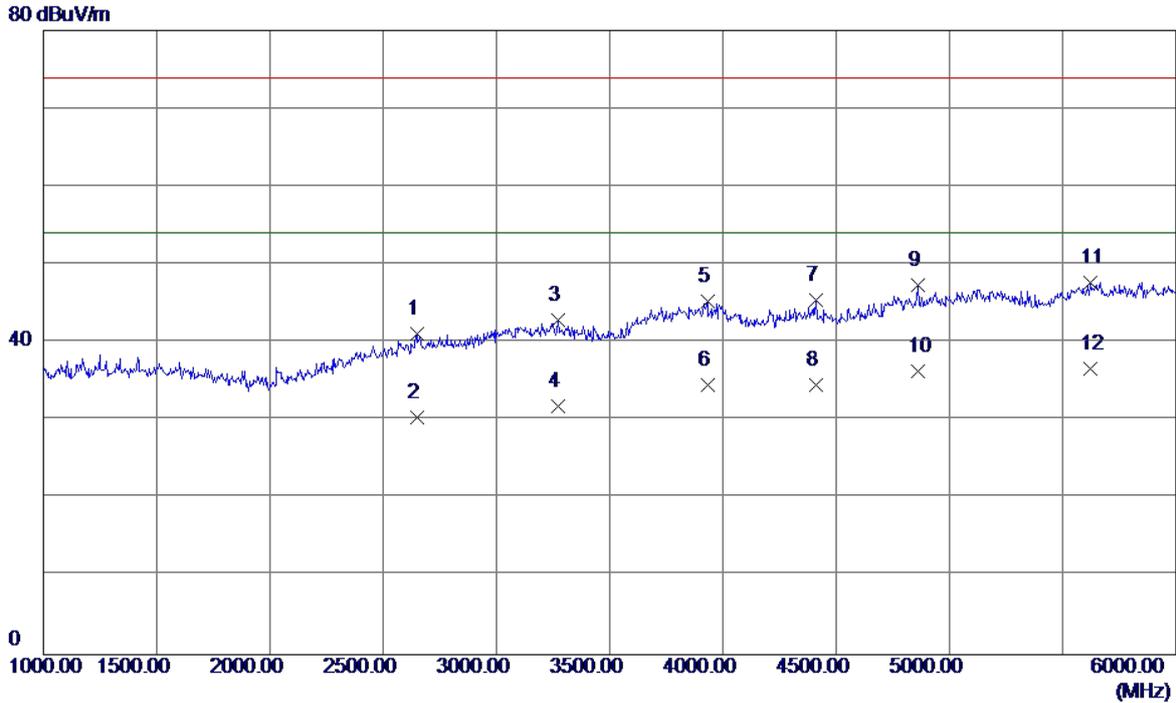


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2647.5000	40.97	0.20	41.17	74.00	-32.83	Peak
2	2647.5000	30.22	0.20	30.42	54.00	-23.58	AVG
3	3272.5000	40.73	2.22	42.95	74.00	-31.05	Peak
4	3272.5000	29.67	2.22	31.89	54.00	-22.11	AVG
5	3932.5000	41.46	3.89	45.35	74.00	-28.65	Peak
6	3932.5000	30.67	3.89	34.56	54.00	-19.44	AVG
7	4412.5000	40.97	4.48	45.45	74.00	-28.55	Peak
8	4412.5000	30.12	4.48	34.60	54.00	-19.40	AVG
9	4862.5000	41.41	5.89	47.30	74.00	-26.70	Peak
10	4862.5000	30.37	5.89	36.26	54.00	-17.74	AVG
11	5622.5000	39.55	8.19	47.74	74.00	-26.26	Peak
12 *	5622.5000	28.52	8.19	36.71	54.00	-17.29	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)		
Test Engineer	Trey Chen		

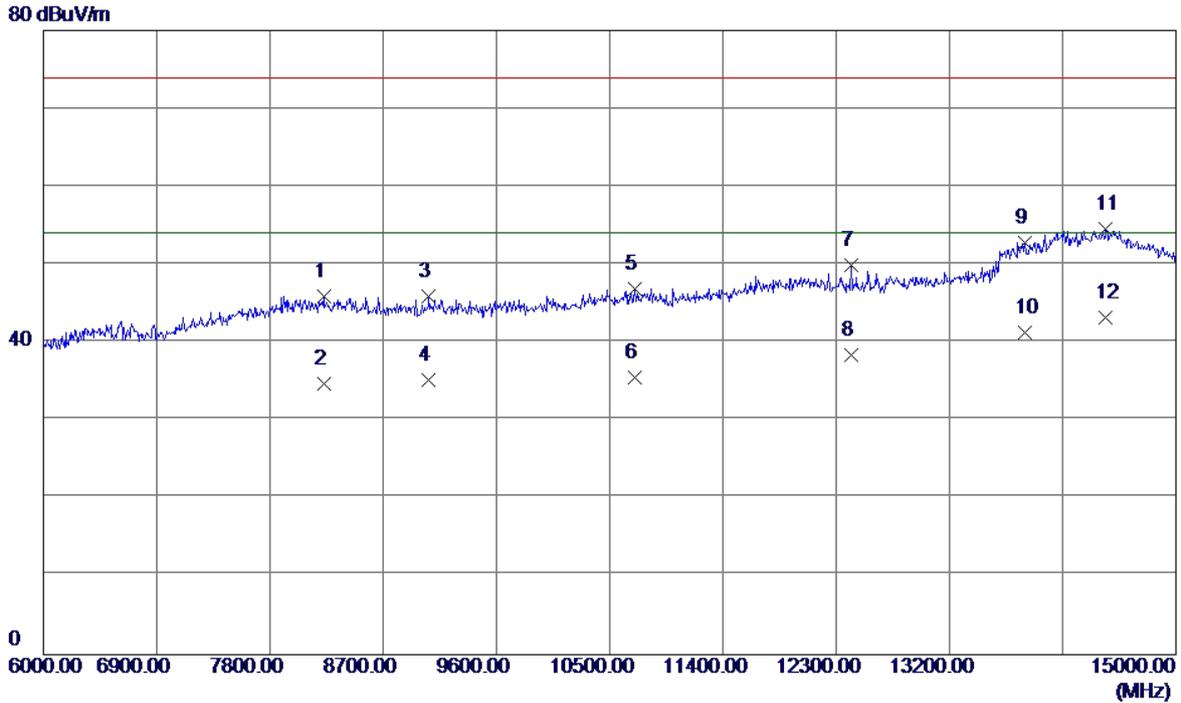

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	8227.5000	31.69	14.17	45.86	74.00	-28.14	Peak
2	8227.5000	20.51	14.17	34.68	54.00	-19.32	AVG
3	9060.0000	31.99	13.95	45.94	74.00	-28.06	Peak
4	9060.0000	21.26	13.95	35.21	54.00	-18.79	AVG
5	10698.0000	30.93	15.98	46.91	74.00	-27.09	Peak
6	10698.0000	19.51	15.98	35.49	54.00	-18.51	AVG
7	12417.0000	31.38	18.49	49.87	74.00	-24.13	Peak
8	12417.0000	19.87	18.49	38.36	54.00	-15.64	AVG
9	13803.0000	30.56	22.28	52.84	74.00	-21.16	Peak
10	13803.0000	18.95	22.28	41.23	54.00	-12.77	AVG
11	14442.0000	30.61	23.96	54.57	74.00	-19.43	Peak
12 *	14442.0000	19.21	23.96	43.17	54.00	-10.83	AVG

EUT	Smart phone	Model Name	MYA-L23
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Huntkey+USB Cable:HONGLIN Battery:SCUD(GY)		
Test Engineer	Trey Chen		

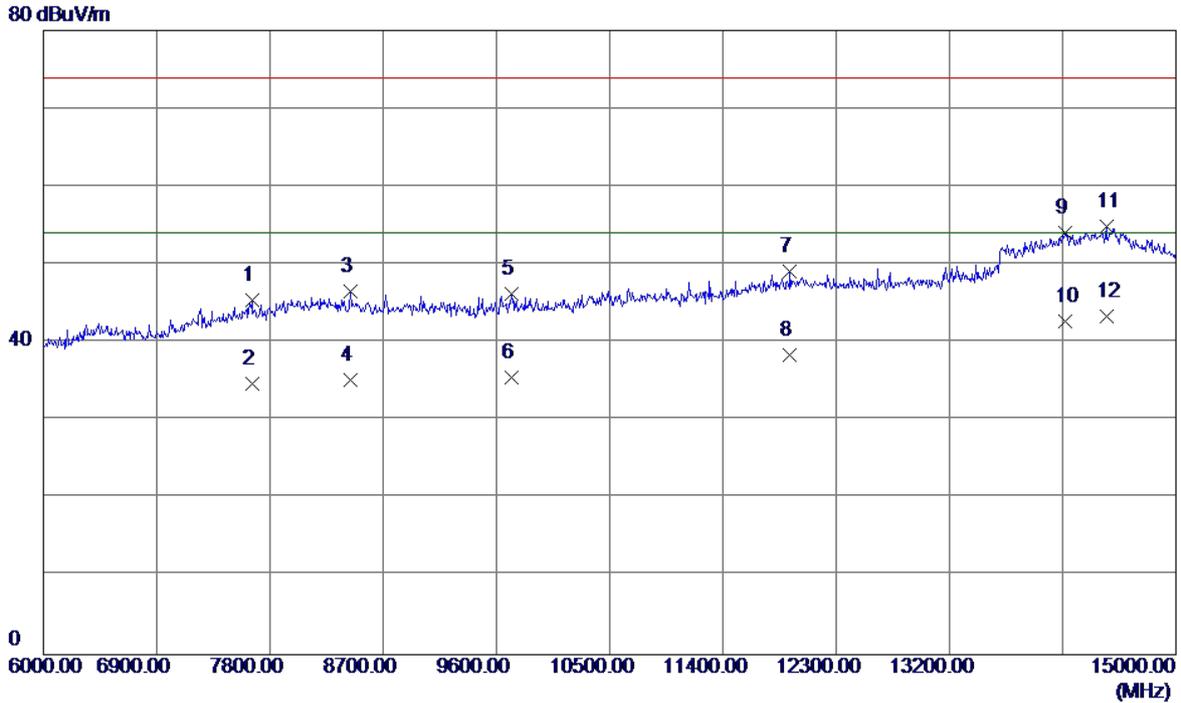

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7656.0000	32.17	13.25	45.42	74.00	-28.58	Peak
2	7656.0000	21.40	13.25	34.65	54.00	-19.35	AVG
3	8443.5000	32.48	14.06	46.54	74.00	-27.46	Peak
4	8443.5000	21.20	14.06	35.26	54.00	-18.74	AVG
5	9717.0000	31.96	14.28	46.24	74.00	-27.76	Peak
6	9717.0000	21.18	14.28	35.46	54.00	-18.54	AVG
7	11931.0000	30.37	18.70	49.07	74.00	-24.93	Peak
8	11931.0000	19.70	18.70	38.40	54.00	-15.60	AVG
9	14122.5000	30.62	23.50	54.12	74.00	-19.88	Peak
10	14122.5000	19.18	23.50	42.68	54.00	-11.32	AVG
11	14446.5000	30.89	23.96	54.85	74.00	-19.15	Peak
12 *	14446.5000	19.35	23.96	43.31	54.00	-10.69	AVG