



The Photos of SAR test

No. I16Z40561-SEM01

For

Huawei Technologies Co.,Ltd.

Smart Phone

Model name: NEM-L22

With

Hardware Version: HL2NEMM

Software Version: NEM-L22C900B049

FCC ID: QISNEM-L22

Issued Date: 2016-5-6



中国认可
国际互认
检测
TESTING
CNAS L0570

Note:


The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT
No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191
Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504
Email:cttl_terminals@catr.cn, website:www.chinattl.com




Picture 1: Constituents of the sample

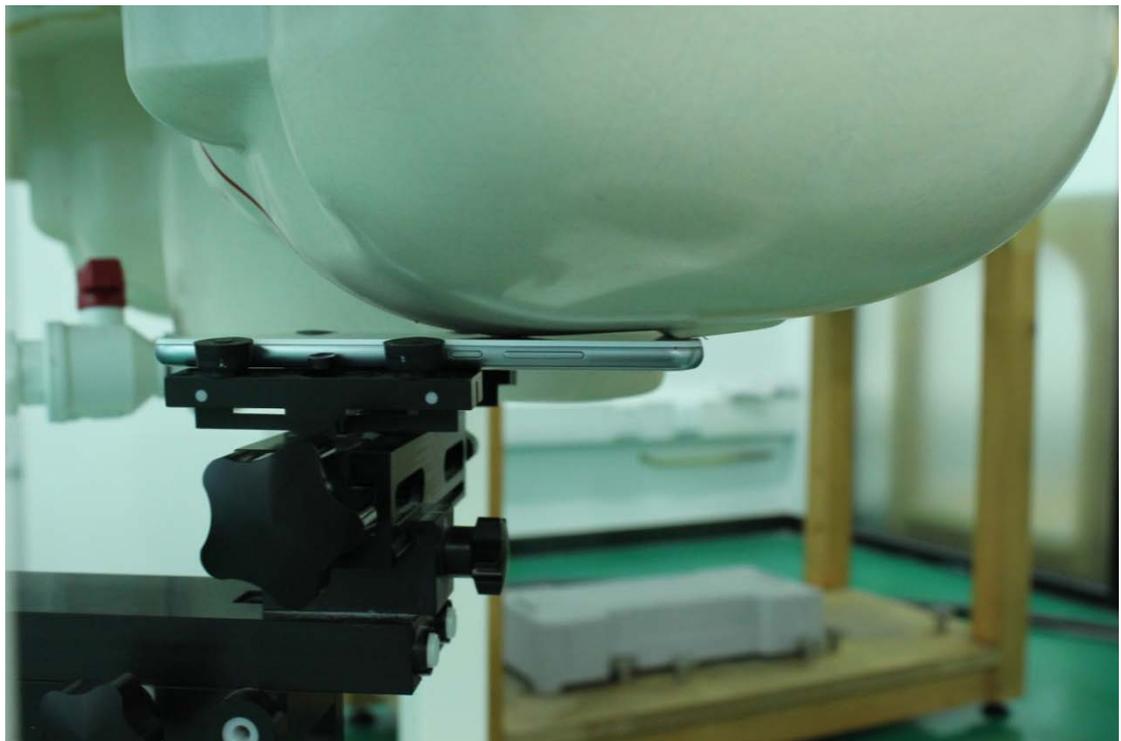


Picture 2: Left Hand Touch Cheek Position



Picture 3: Left Hand Tilt 15° Position

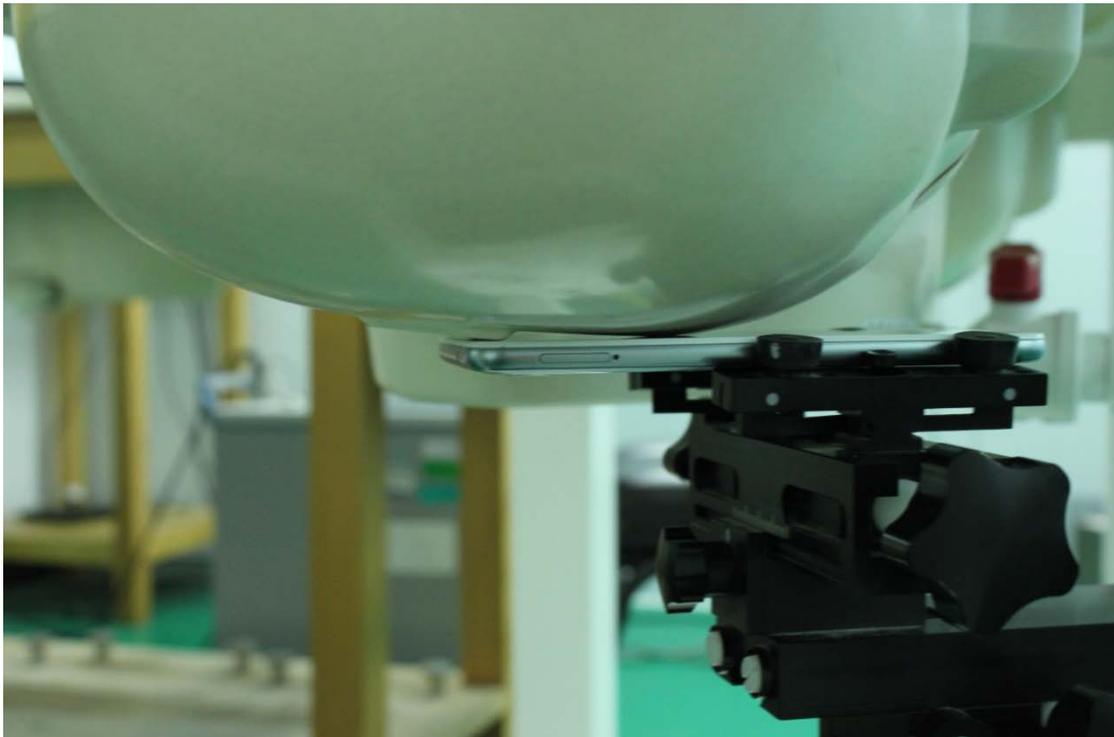


Picture 4: Right Hand Touch Cheek Position

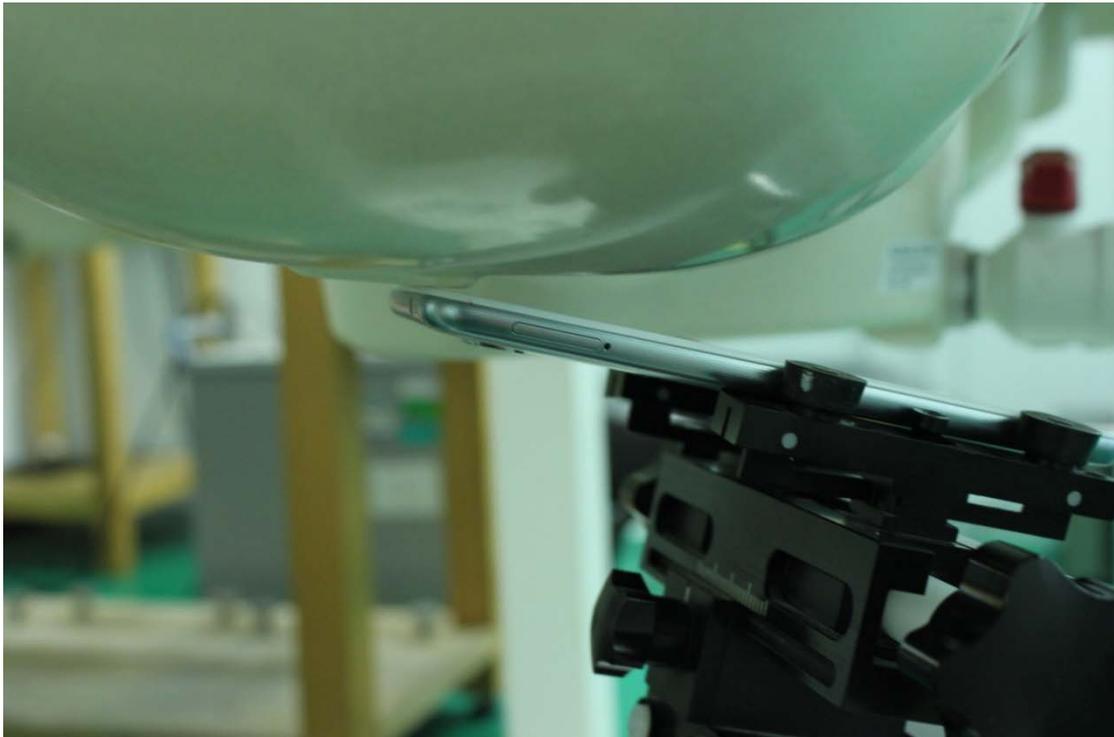


Picture 5: Right Hand Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 6 test positions all with the distance =10mm between the EUT and the phantom bottom:

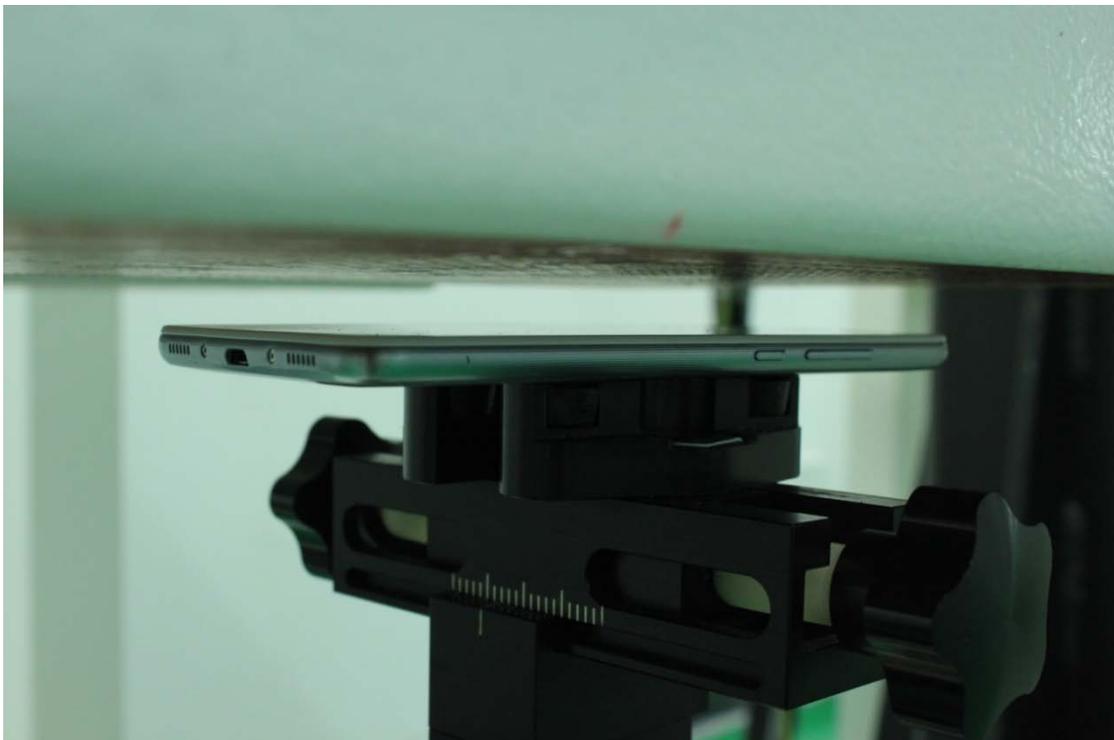

Picture 6: Front - 10mm

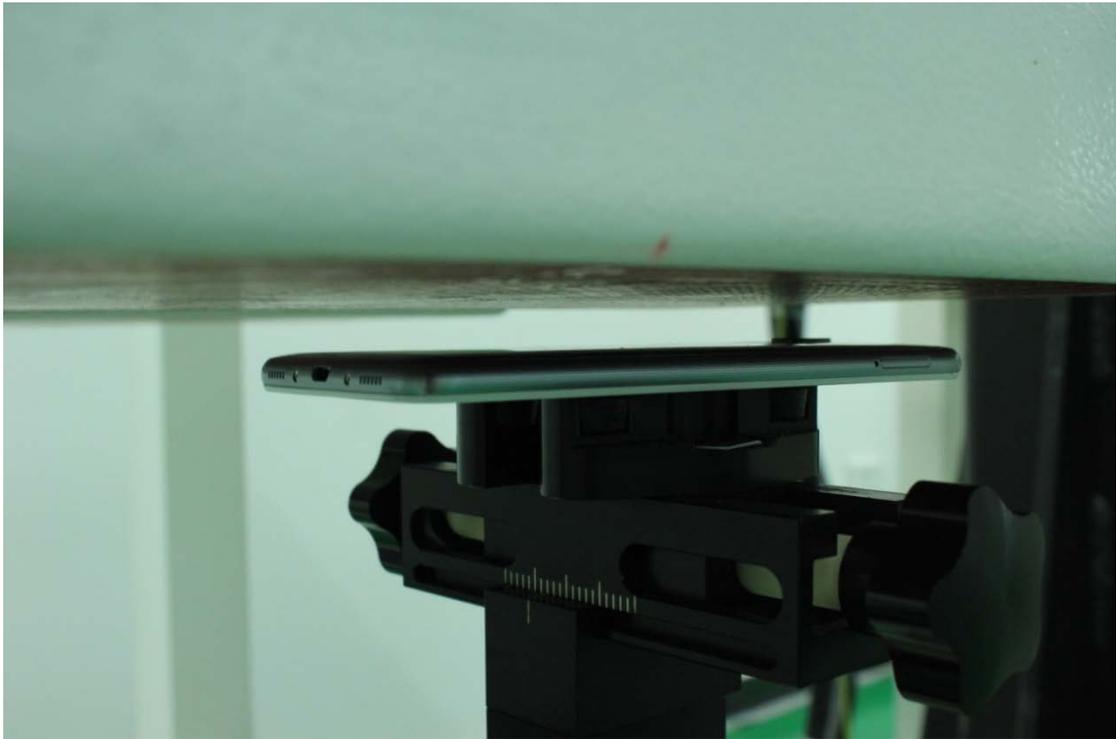

Picture 7: Rear – 10mm



Picture 8: Left Edge – 10mm



Picture 9: Right Edge – 10mm



Picture 10: Bottom Edge – 10mm



Picture 11: Top Edge – 10mm

Test positions for body:

The Body SAR is tested at the following 2 test positions all with the distance =15mm between the EUT and the phantom bottom:



Picture 12: Front - 15mm



Picture 13: Rear – 15mm