

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band IV 1312CH Towards Ground 15mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.461$ S/m; $\epsilon_r = 53.395$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.04, 8.04, 8.04); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.633 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 6.903 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.385 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.717 W/kg

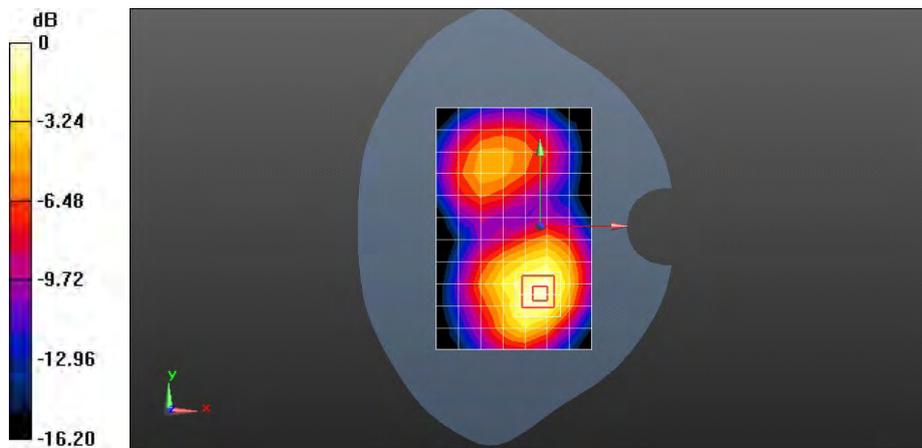

0 dB = 0.717 W/kg = -1.44 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band IV 1413CH Towards Ground 15mm with battery 2#

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 53.305$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.04, 8.04, 8.04); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.765 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.035 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.456 W/kg

Maximum value of SAR (measured) = 0.825 W/kg

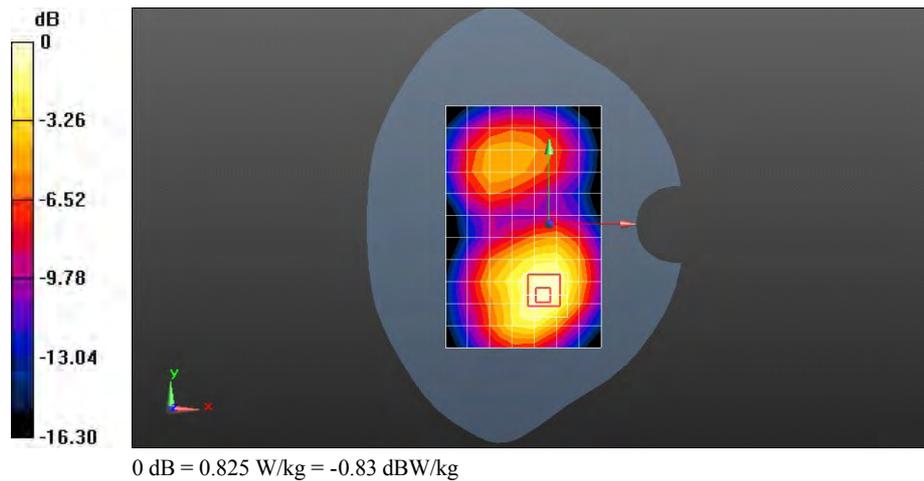

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band IV 1513CH Towards Phantom 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: HW-UMTS-FDD; Frequency: 1752.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.494$ S/m; $\epsilon_r = 53.223$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.04, 8.04, 8.04); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.904 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 7.618 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 1.57 W/kg
SAR(1 g) = 0.863 W/kg; SAR(10 g) = 0.446 W/kg
 Maximum value of SAR (measured) = 0.957 W/kg

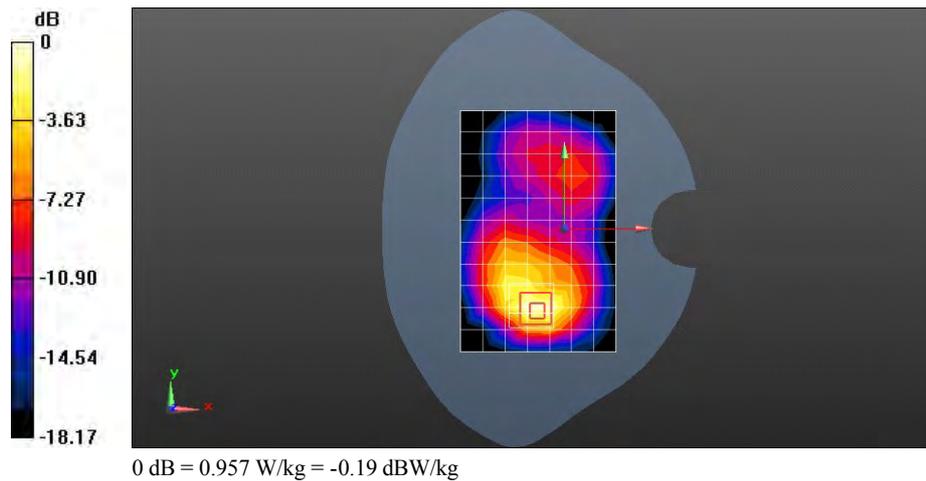

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band IV 1413CH Towards Phantom 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: HW-UMTS-FDD; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 53.305$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:


- Probe: EX3DV4 - SN3898; ConvF(8.04, 8.04, 8.04); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.955 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 7.362 V/m; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 1.64 W/kg
SAR(1 g) = 0.914 W/kg; SAR(10 g) = 0.470 W/kg
 Maximum value of SAR (measured) = 1.03 W/kg

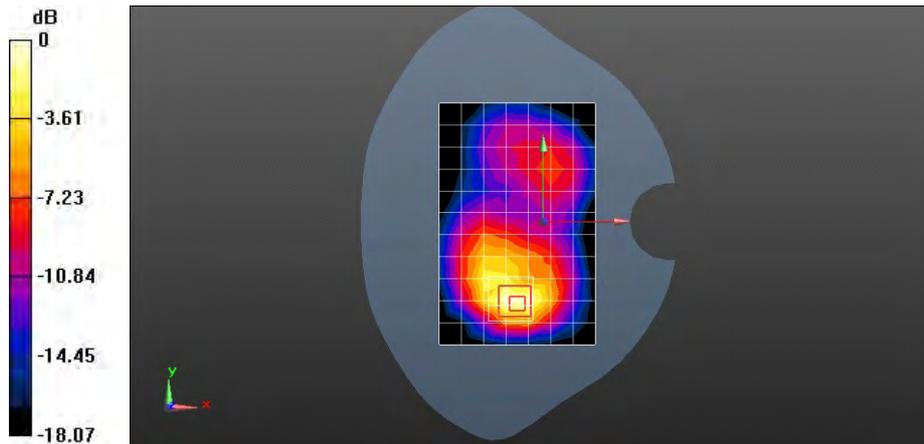

0 dB = 1.03 W/kg = 0.13 dBW/kg

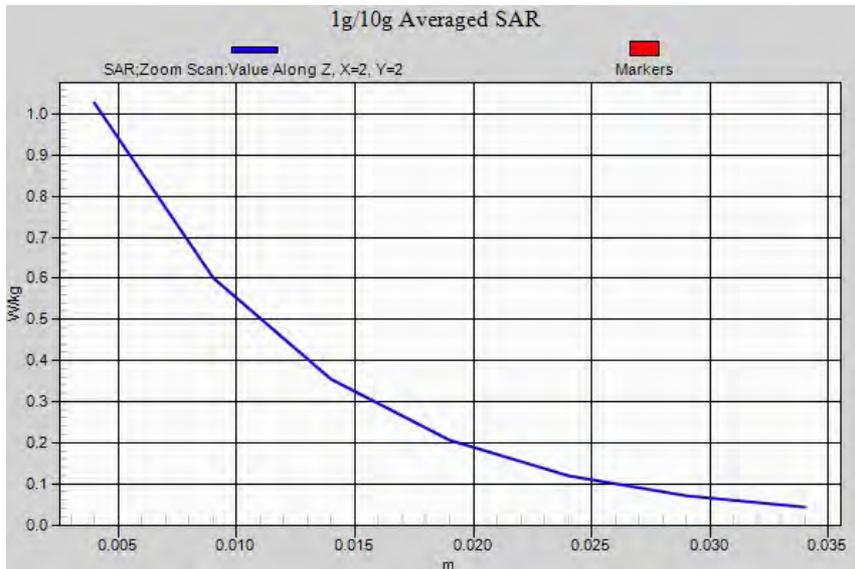

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band IV 1413CH Towards Phantom 10mm-repeated

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: HW-UMTS-FDD; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 53.305$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.04, 8.04, 8.04); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.925 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 6.420 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 1.61 W/kg
SAR(1 g) = 0.895 W/kg; SAR(10 g) = 0.456 W/kg
 Maximum value of SAR (measured) = 1.02 W/kg

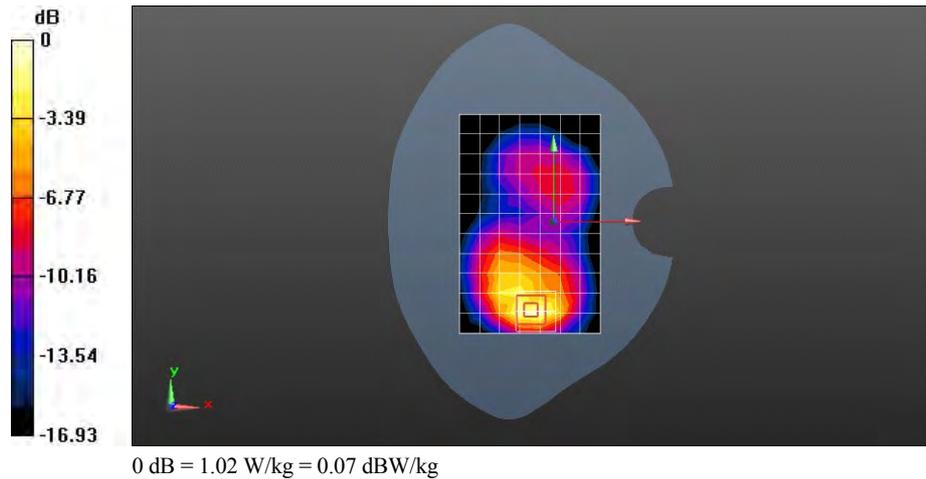

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band IV 1312CH Towards Phantom 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.461$ S/m; $\epsilon_r = 53.395$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.04, 8.04, 8.04); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.804 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 6.676 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.774 W/kg; SAR(10 g) = 0.392 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.860 W/kg

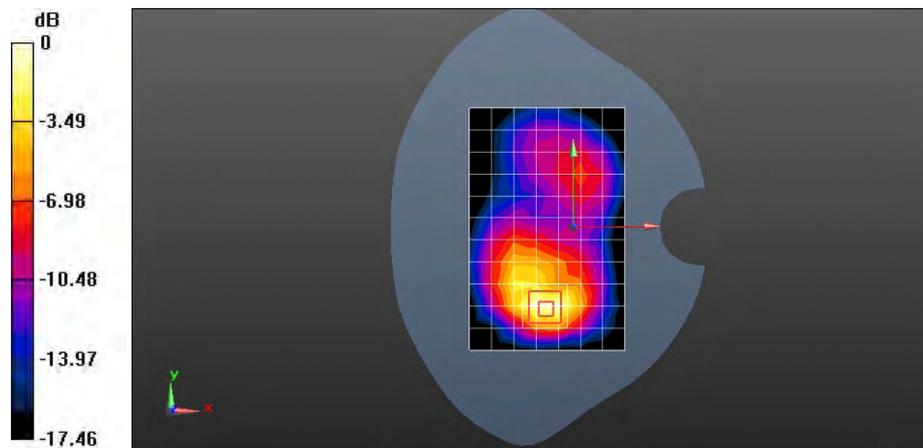

0 dB = 0.860 W/kg = -0.66 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band IV 1513CH Towards Ground 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1752.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.494$ S/m; $\epsilon_r = 53.223$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.04, 8.04, 8.04); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.841 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.986 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.839 W/kg; SAR(10 g) = 0.455 W/kg

Maximum value of SAR (measured) = 0.923 W/kg

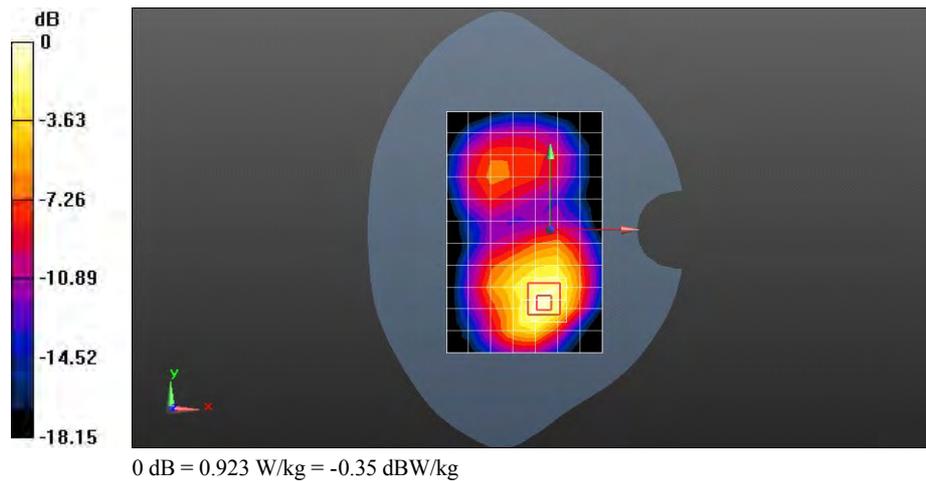

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band IV 1413CH Towards Ground 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: HW-UMTS-FDD; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 53.305$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.04, 8.04, 8.04); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.893 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 6.780 V/m; Power Drift = 0.15 dB
 Peak SAR (extrapolated) = 1.65 W/kg
SAR(1 g) = 0.877 W/kg; SAR(10 g) = 0.487 W/kg
 Maximum value of SAR (measured) = 0.955 W/kg

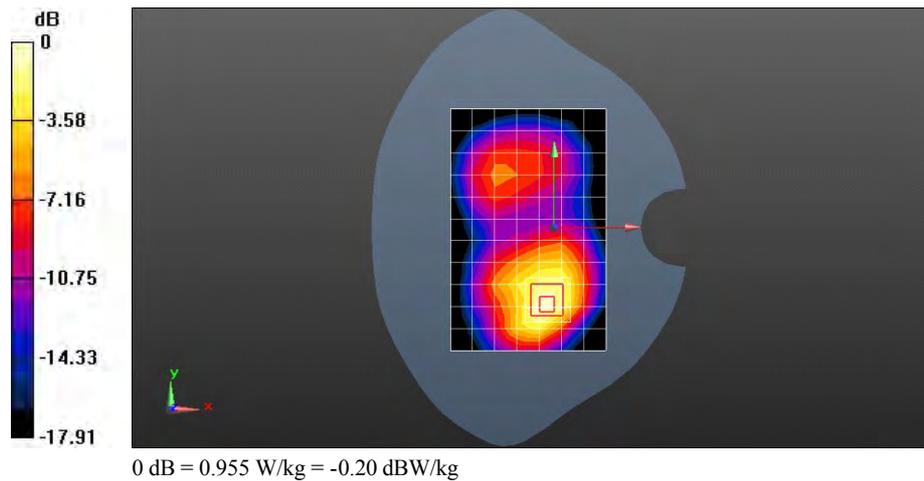

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band IV 1312CH Towards Ground 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.461$ S/m; $\epsilon_r = 53.395$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.04, 8.04, 8.04); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.705 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.469 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.728 W/kg; SAR(10 g) = 0.401 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.803 W/kg

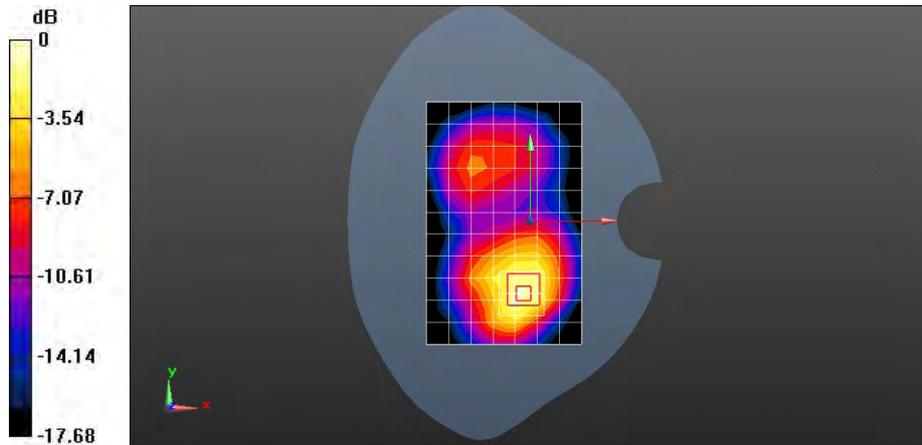

0 dB = 0.803 W/kg = -0.95 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band IV 1413CH Left edge 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: HW-UMTS-FDD; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 53.305$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.04, 8.04, 8.04); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.137 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 7.509 V/m; Power Drift = 0.19 dB
 Peak SAR (extrapolated) = 0.234 W/kg
SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.080 W/kg
 Maximum value of SAR (measured) = 0.153 W/kg

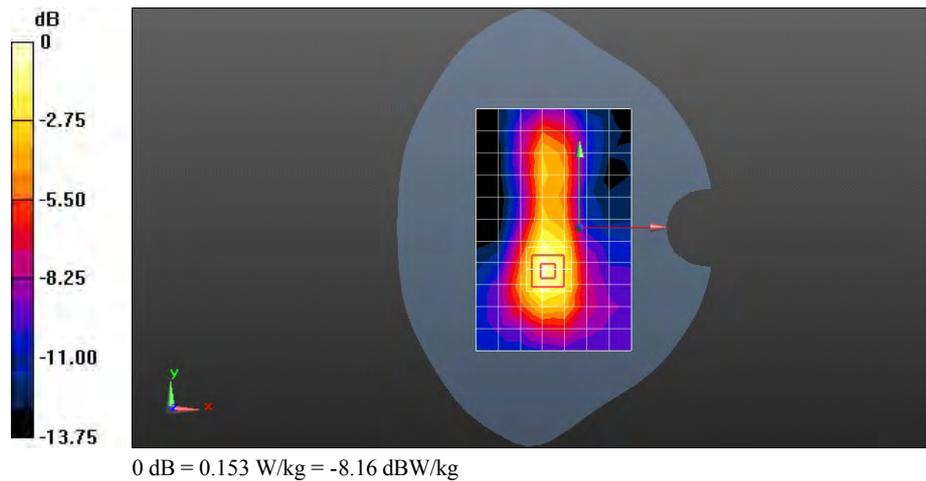

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band IV 1413CH Right edge 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: HW-UMTS-FDD; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 53.305$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.04, 8.04, 8.04); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.136 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 5.689 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 0.265 W/kg
SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.086 W/kg
 Maximum value of SAR (measured) = 0.170 W/kg

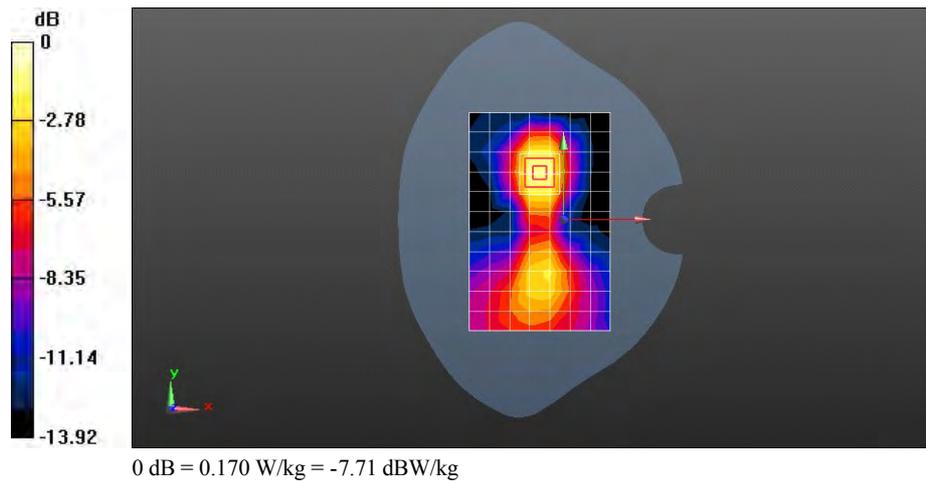

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band IV 1413CH Bottom edge 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: HW-UMTS-FDD; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 53.305$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.04, 8.04, 8.04); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.724 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 17.896 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 1.19 W/kg
SAR(1 g) = 0.665 W/kg; SAR(10 g) = 0.337 W/kg
 Maximum value of SAR (measured) = 0.760 W/kg

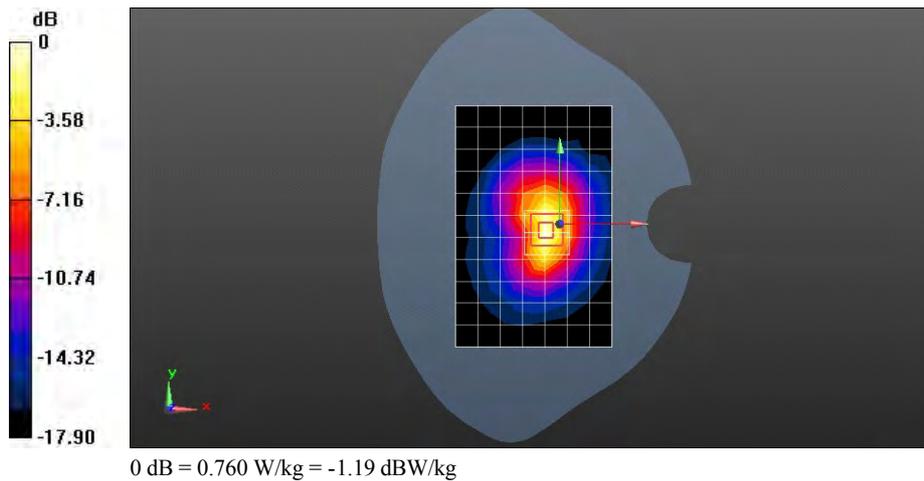

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band IV 1413CH Towards Phantom 10mm with battery 2#

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: HW-UMTS-FDD; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 53.305$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.04, 8.04, 8.04); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.918 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 6.391 V/m; Power Drift = 0.11 dB
 Peak SAR (extrapolated) = 1.61 W/kg
SAR(1 g) = 0.895 W/kg; SAR(10 g) = 0.456 W/kg
 Maximum value of SAR (measured) = 1.02 W/kg

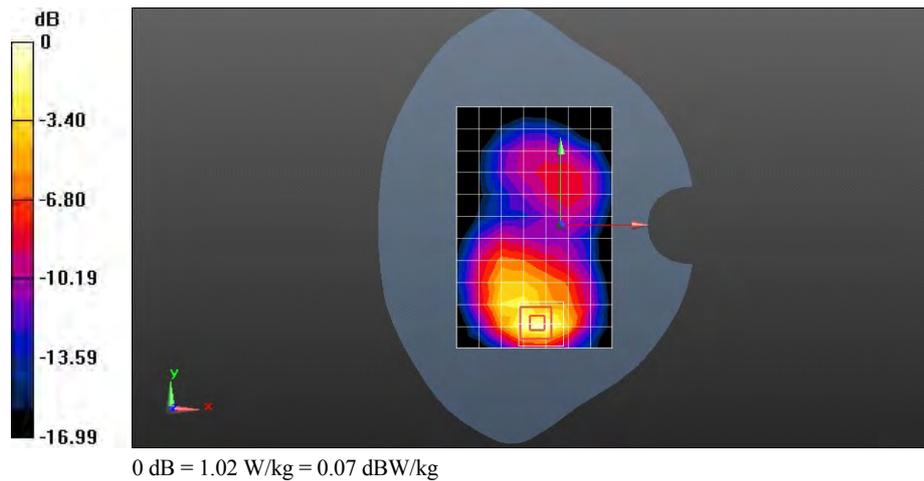

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9400CH Left hand touch cheek

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: HW-UMTS-FDD; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 41.425$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.159 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 3.121 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.485 W/kg
SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.093 W/kg
 Maximum value of SAR (measured) = 0.177 W/kg

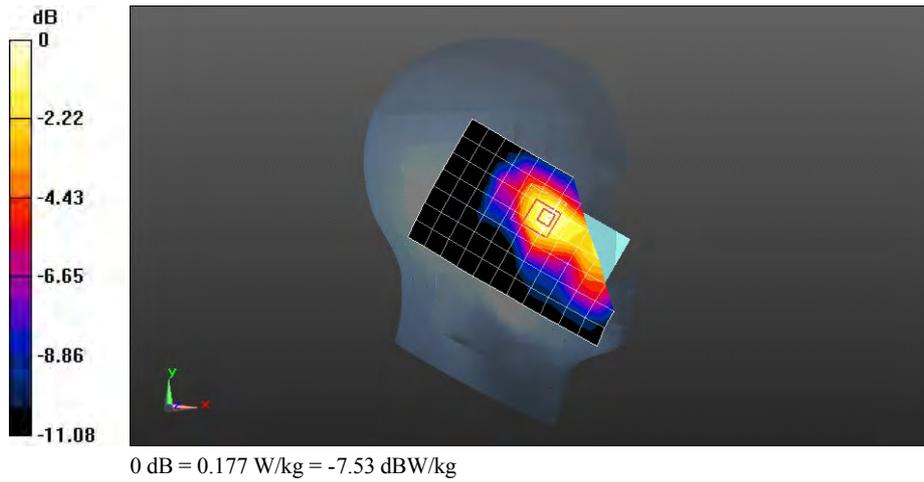

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9400CH Left hand tilt 15 degree

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: HW-UMTS-FDD; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 41.425$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.0761 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 3.921 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.505 W/kg
SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.035 W/kg
 Maximum value of SAR (measured) = 0.0793 W/kg

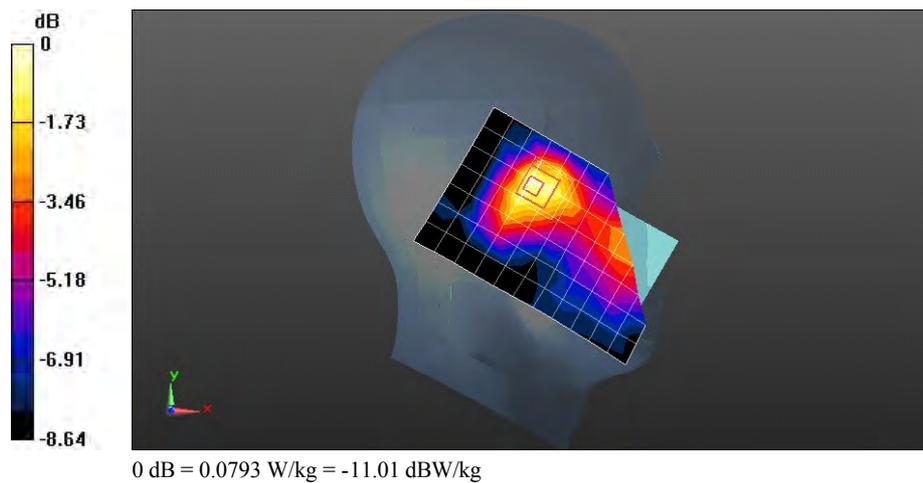

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9400CH Right hand touch cheek

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: HW-UMTS-FDD; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 41.425$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.335 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 4.732 V/m; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 0.501 W/kg
SAR(1 g) = 0.308 W/kg; SAR(10 g) = 0.188 W/kg

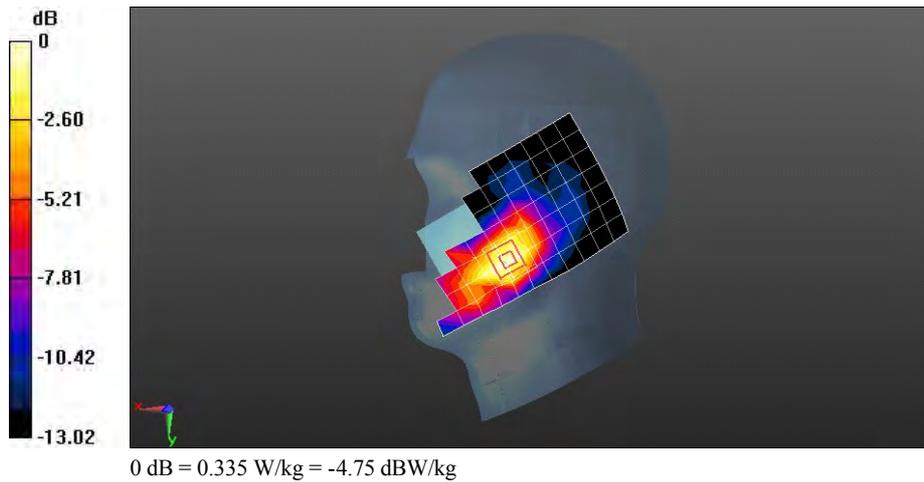

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9400CH Right hand tilt 15 degree

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: HW-UMTS-FDD; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 41.425$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.0597 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 5.799 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 0.358 W/kg
SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.025 W/kg
Maximum value of SAR (measured) = 0.0553 W/kg

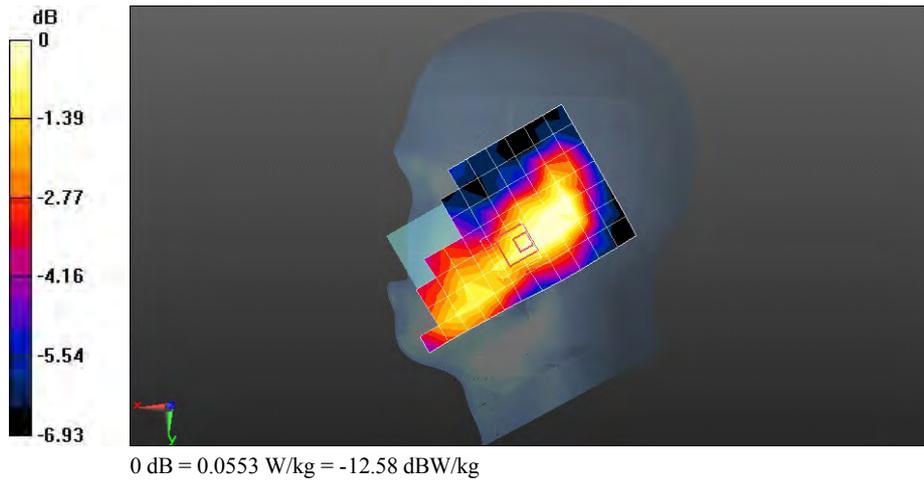

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9538CH Right hand touch cheek

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: HW-UMTS-FDD; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 41.38$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.343 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 4.754 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.513 W/kg
SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.193 W/kg

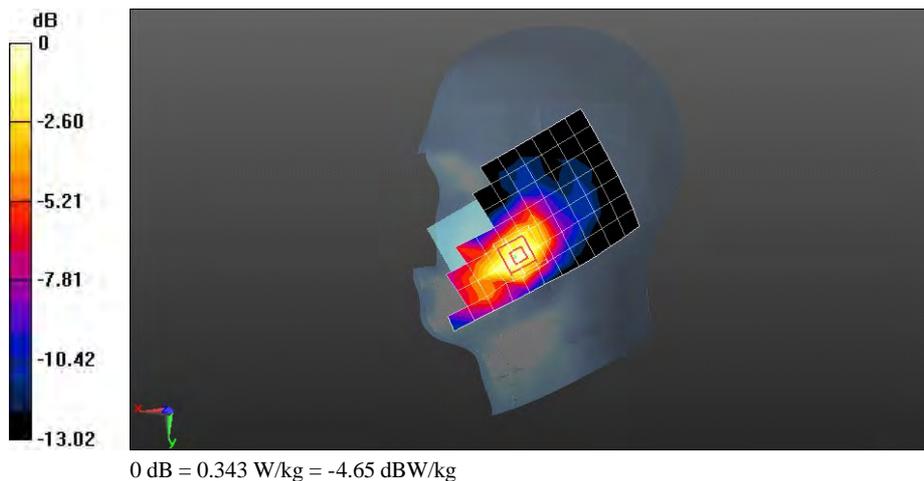

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9262CH Right hand touch cheek

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.325 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.711 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.183 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

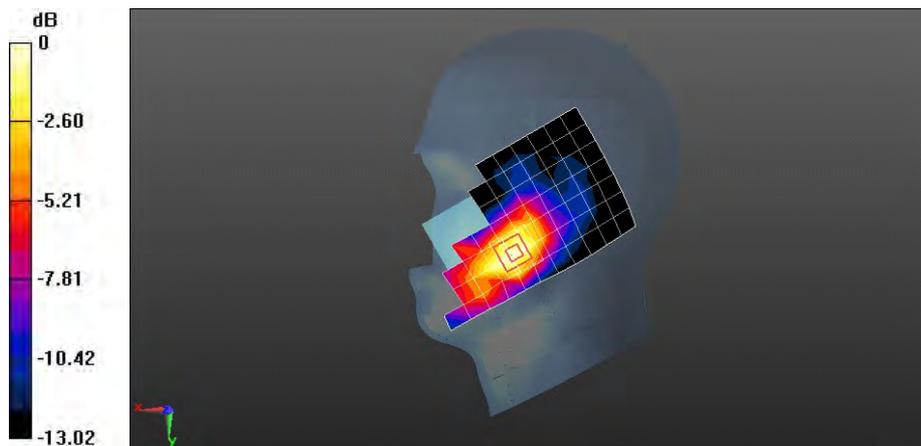

0 dB = 0.325 W/kg = -4.88 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9538CH Right hand touch cheek with battery 2#

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: HW-UMTS-FDD; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.451 \text{ S/m}$; $\epsilon_r = 41.38$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.304 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.361 V/m; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 0.533 W/kg
SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.198 W/kg
 Maximum value of SAR (measured) = 0.357 W/kg

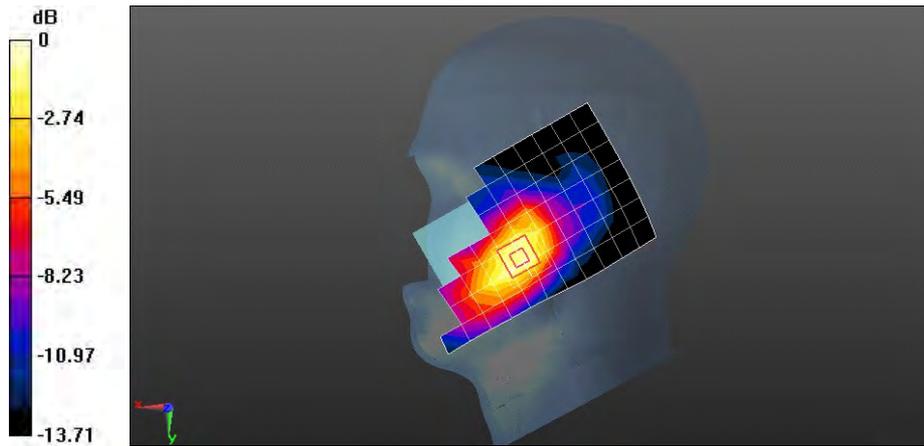

0 dB = 0.357 W/kg = -4.47 dBW/kg



Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9262CH Towards Phantom 15mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.462$ S/m; $\epsilon_r = 53.489$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.788 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 5.714 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.752 W/kg; SAR(10 g) = 0.414 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.830 W/kg

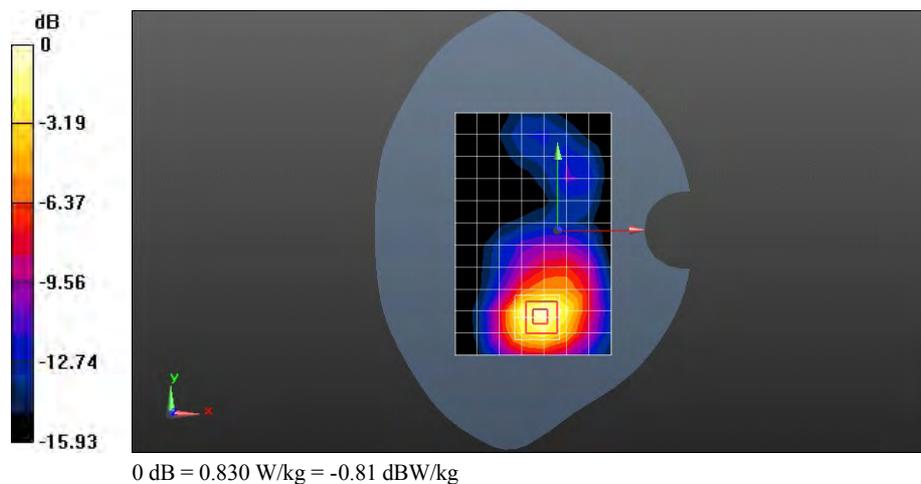

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9400CH Towards Phantom 15mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 53.422$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.931 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.200 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.910 W/kg; SAR(10 g) = 0.497 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

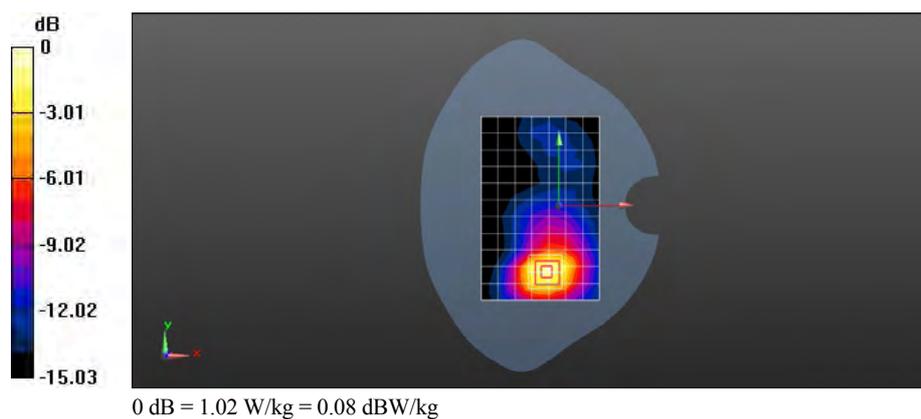

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9538CH Towards Phantom 15mm**DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1**

Communication System: HW-UMTS-FDD; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.521$ S/m; $\epsilon_r = 53.392$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.967 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.205 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.939 W/kg; SAR(10 g) = 0.506 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

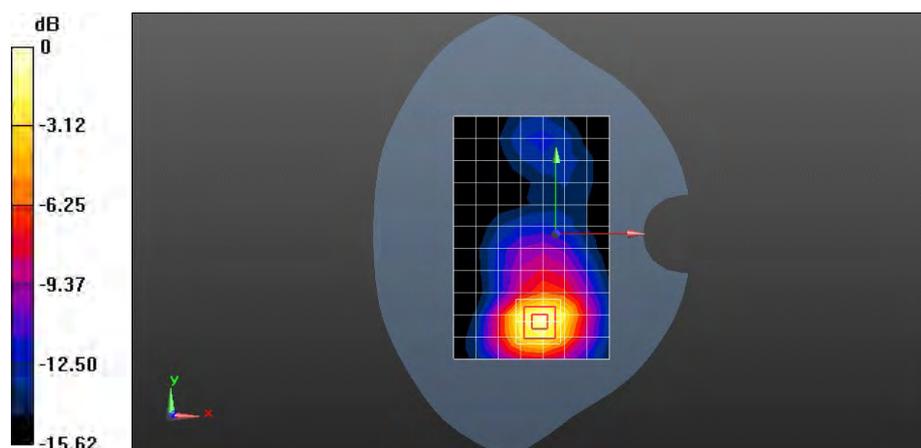

0 dB = 1.05 W/kg = 0.21 dBW/kg

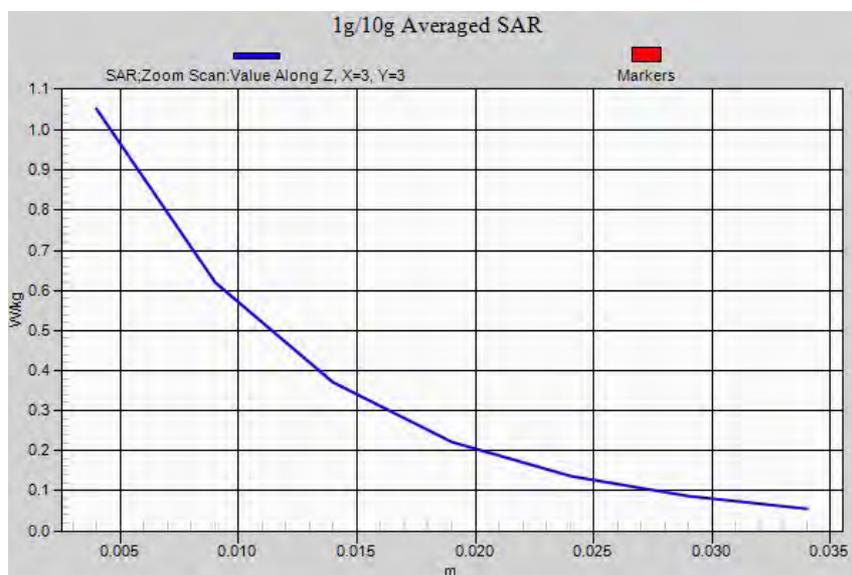

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9538CH Towards Phantom 15mm-repeated

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.521$ S/m; $\epsilon_r = 53.392$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.863 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.027 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.934 W/kg; SAR(10 g) = 0.502 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

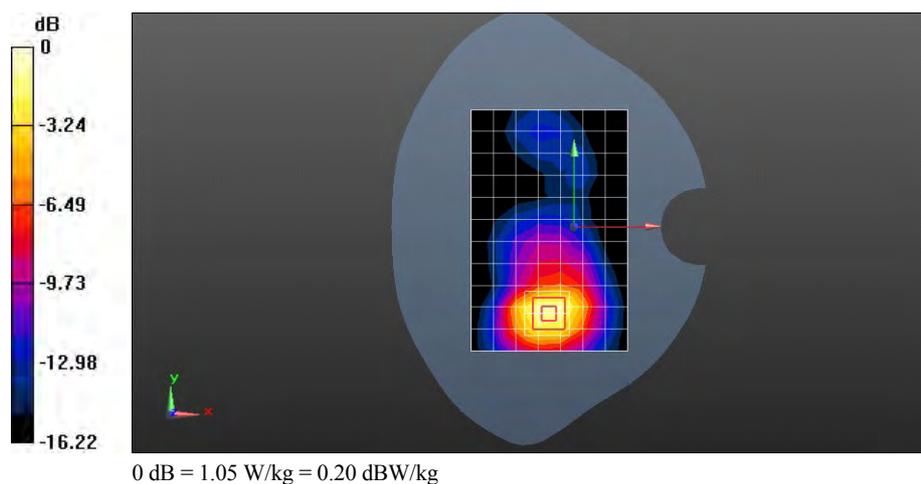

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9262CH Towards Ground 15mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.462$ S/m; $\epsilon_r = 53.489$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.678 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 5.966 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.653 W/kg; SAR(10 g) = 0.353 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.724 W/kg

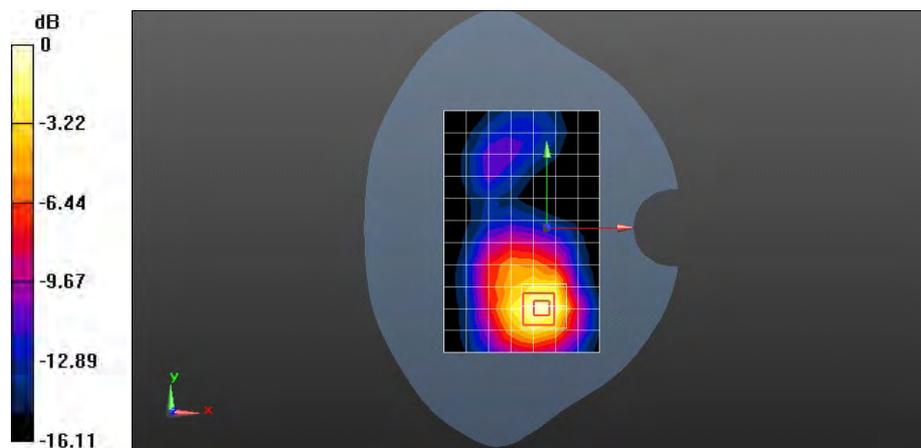

0 dB = 0.724 W/kg = -1.40 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9400CH Towards Ground 15mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 53.422$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.836 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.799 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.788 W/kg; SAR(10 g) = 0.430 W/kg

Maximum value of SAR (measured) = 0.869 W/kg

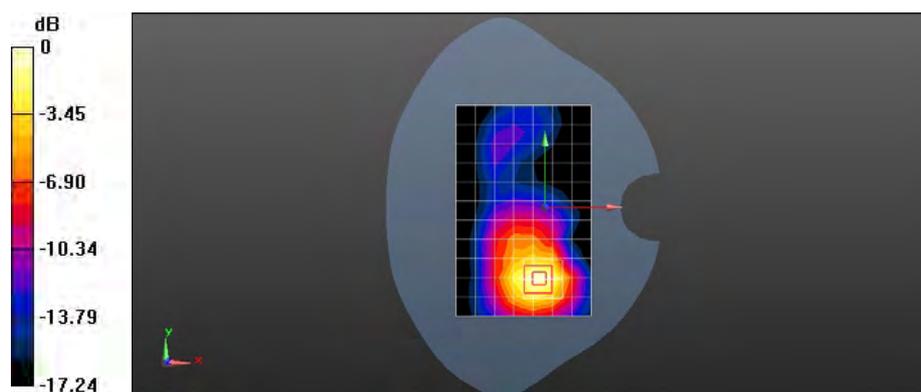

0 dB = 0.869 W/kg = -0.61 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9538CH Towards Ground 15mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.521$ S/m; $\epsilon_r = 53.392$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.889 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.345 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.829 W/kg; SAR(10 g) = 0.453 W/kg

Maximum value of SAR (measured) = 0.917 W/kg

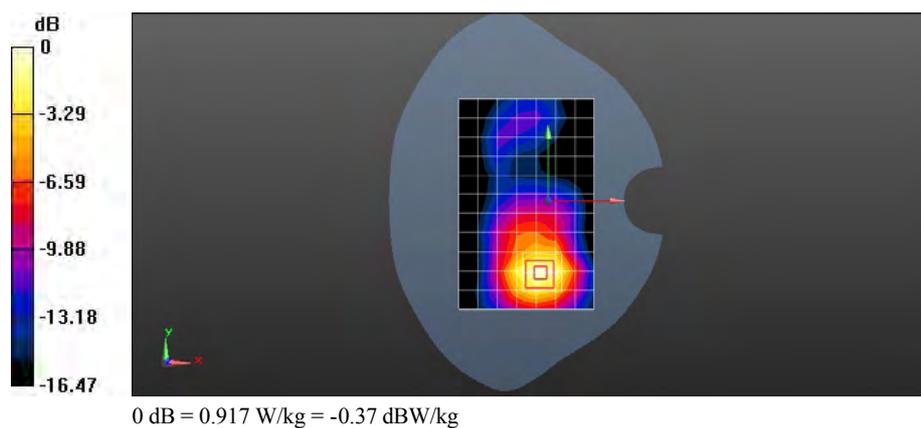

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9538CH Towards Phantom 15mm with battery 2#

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.521$ S/m; $\epsilon_r = 53.392$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.896 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.960 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.924 W/kg; SAR(10 g) = 0.495 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

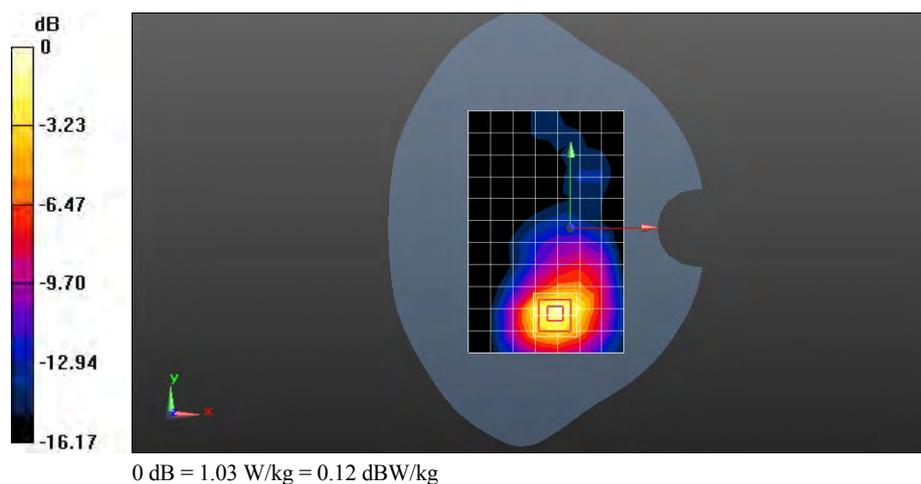

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9262CH Towards Phantom 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.462$ S/m; $\epsilon_r = 53.489$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.769 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 4.192 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.766 W/kg; SAR(10 g) = 0.388 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.860 W/kg

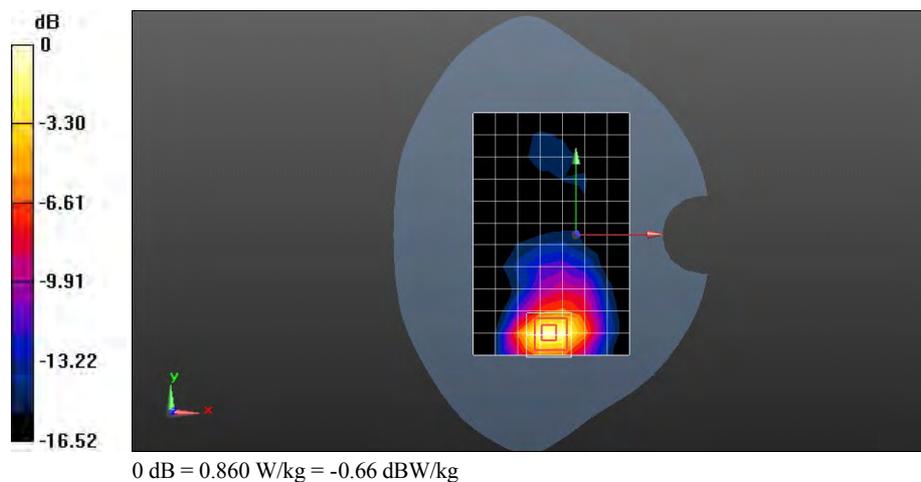

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9400CH Towards Phantom 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 53.422$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.878 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.603 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.836 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 0.945 W/kg

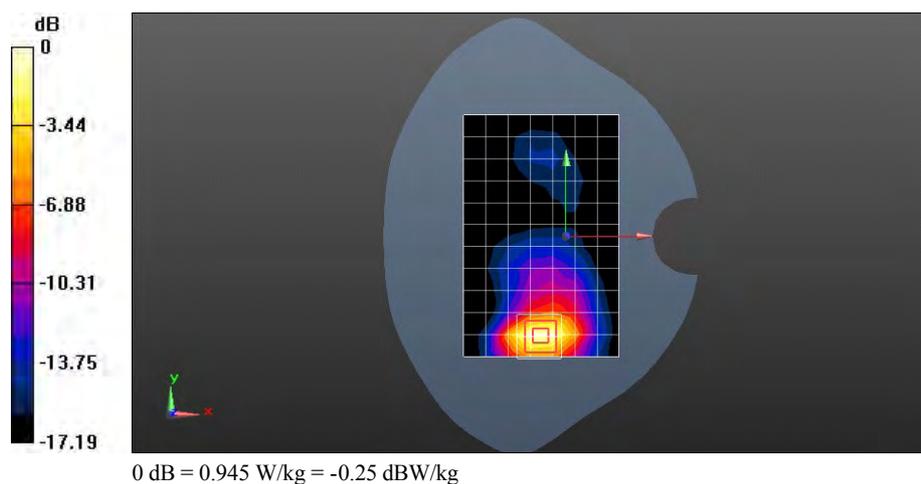

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9538CH Towards Phantom 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.521$ S/m; $\epsilon_r = 53.392$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.855 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.952 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.422 W/kg

Maximum value of SAR (measured) = 0.927 W/kg

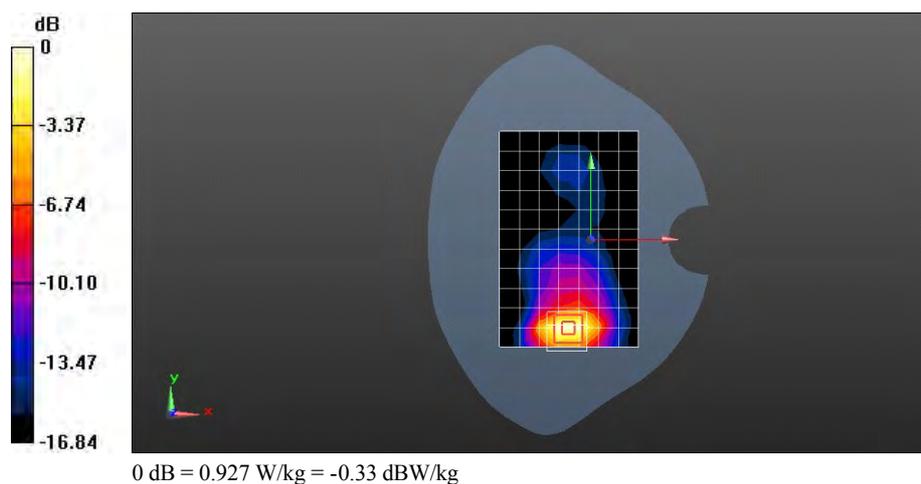

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9262CH Towards Ground 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.462$ S/m; $\epsilon_r = 53.489$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.734 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 3.926 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.332 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.739 W/kg

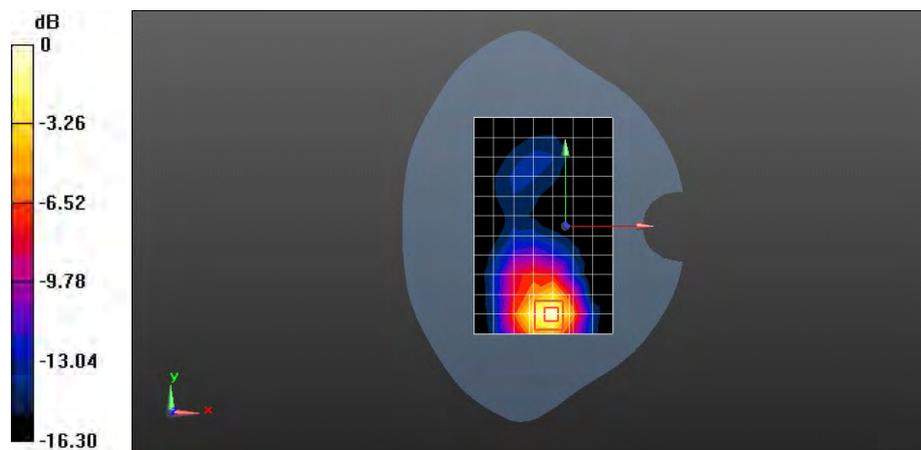

0 dB = 0.739 W/kg = -1.31 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9400CH Towards Ground 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 53.422$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.788 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.402 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.721 W/kg; SAR(10 g) = 0.370 W/kg

Maximum value of SAR (measured) = 0.812 W/kg

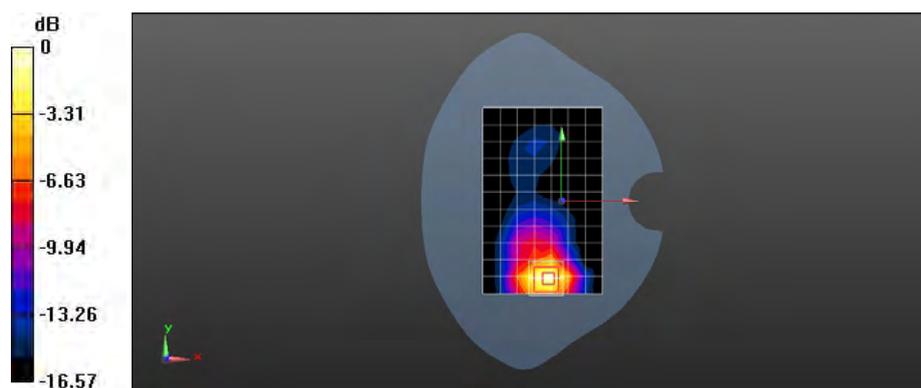

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9538CH Towards Ground 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.521$ S/m; $\epsilon_r = 53.392$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.748 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.542 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.354 W/kg

Maximum value of SAR (measured) = 0.755 W/kg

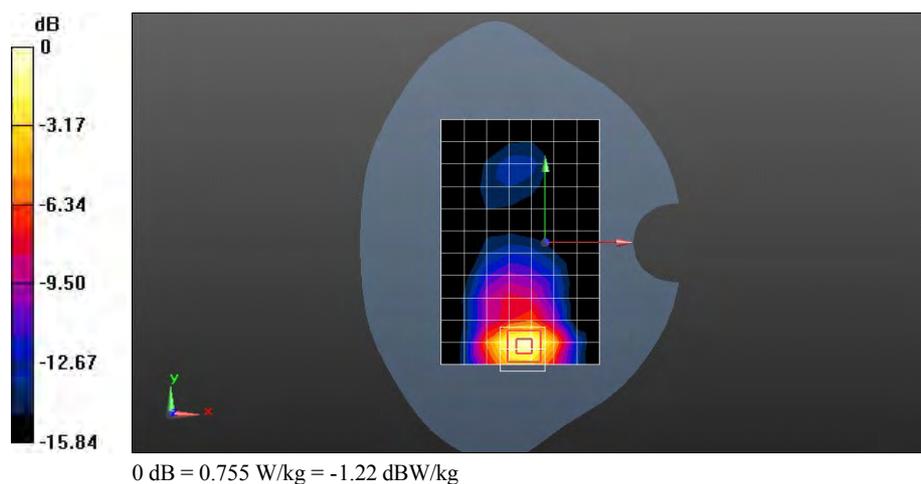

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9400CH Left edge 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 53.422$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0266 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.396 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0273 W/kg

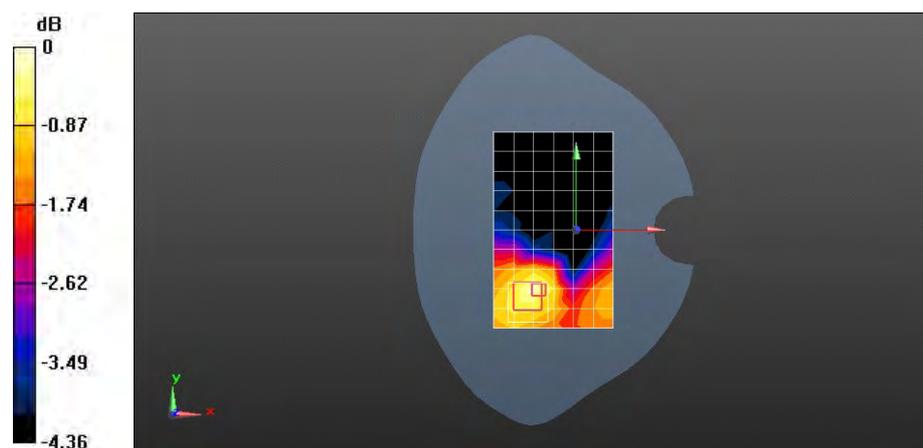

0 dB = 0.0273 W/kg = -15.64 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9400CH Right edge 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 53.422$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0409 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.352 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0436 W/kg

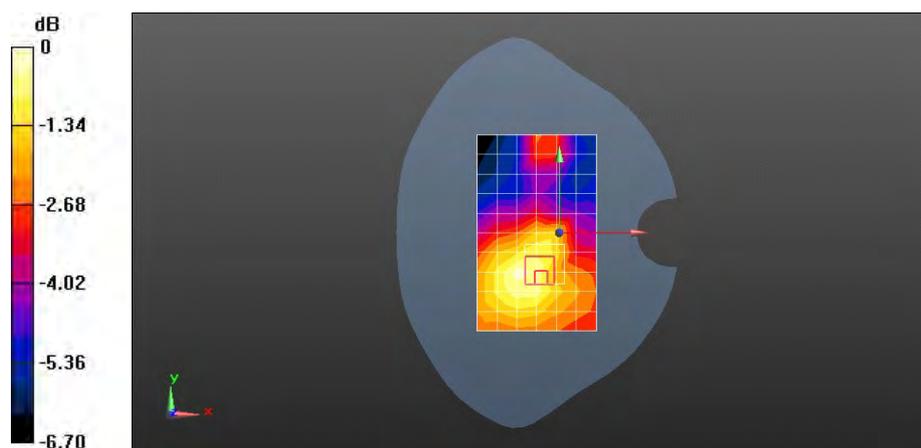

0 dB = 0.0436 W/kg = -13.60 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9262CH Bottom edge 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.462$ S/m; $\epsilon_r = 53.489$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.723 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 20.071 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.838 W/kg; SAR(10 g) = 0.408 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.952 W/kg

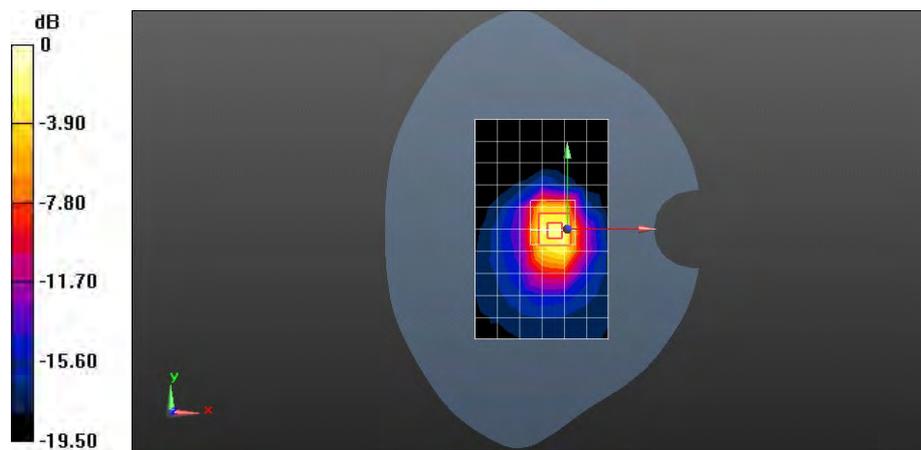

0 dB = 0.952 W/kg = -0.21 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9400CH Bottom edge 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 53.422$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.894 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.641 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.520 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

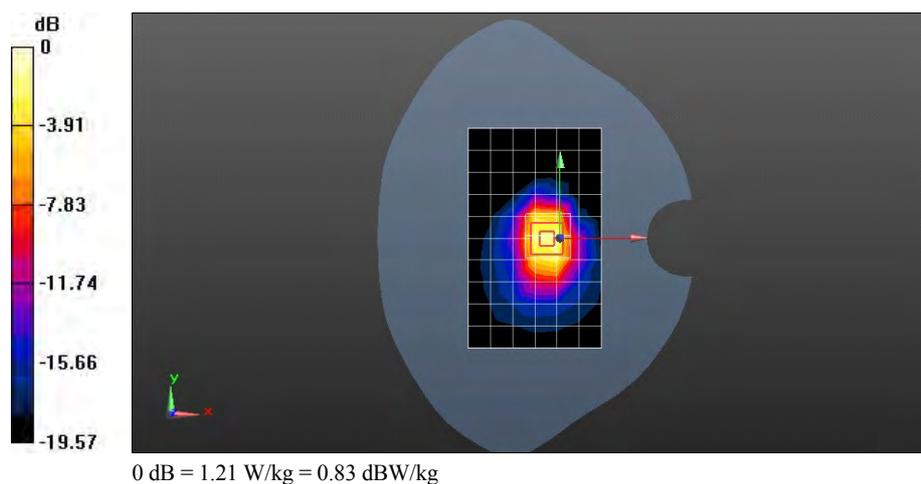

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9538CH Bottom edge 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: HW-UMTS-FDD; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.521$ S/m; $\epsilon_r = 53.392$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:


- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 1.08 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 26.723 V/m; Power Drift = -0.16 dB
 Peak SAR (extrapolated) = 2.05 W/kg
SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.528 W/kg
 Maximum value of SAR (measured) = 1.25 W/kg

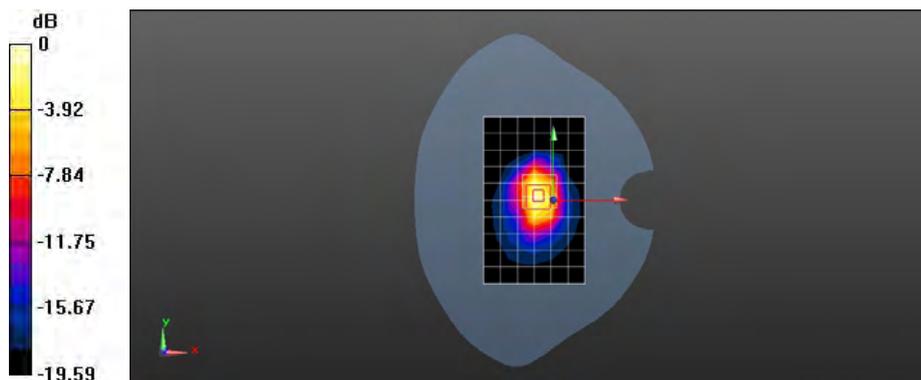

0 dB = 1.25 W/kg = 0.97 dBW/kg

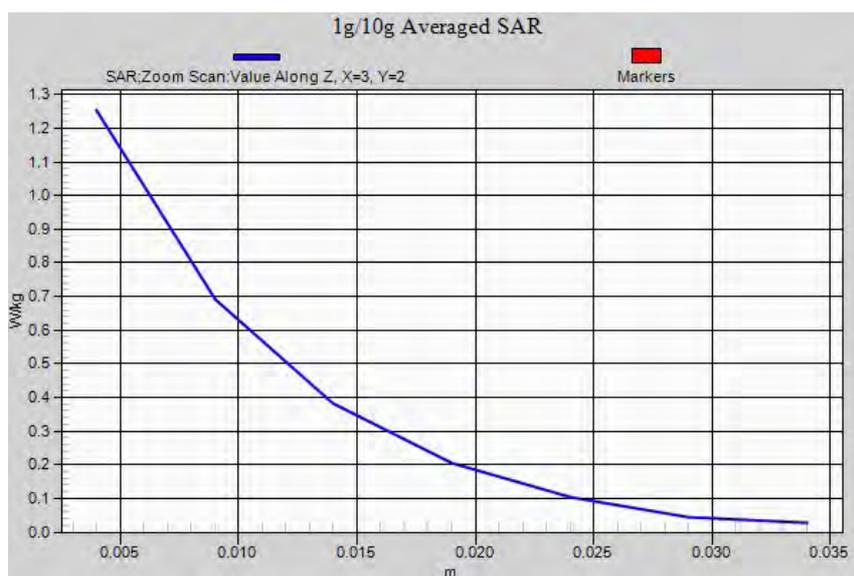

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9538CH Bottom edge 10mm-repeated

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.521$ S/m; $\epsilon_r = 53.392$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.914 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.783 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.530 W/kg

Maximum value of SAR (measured) = 1.25 W/kg

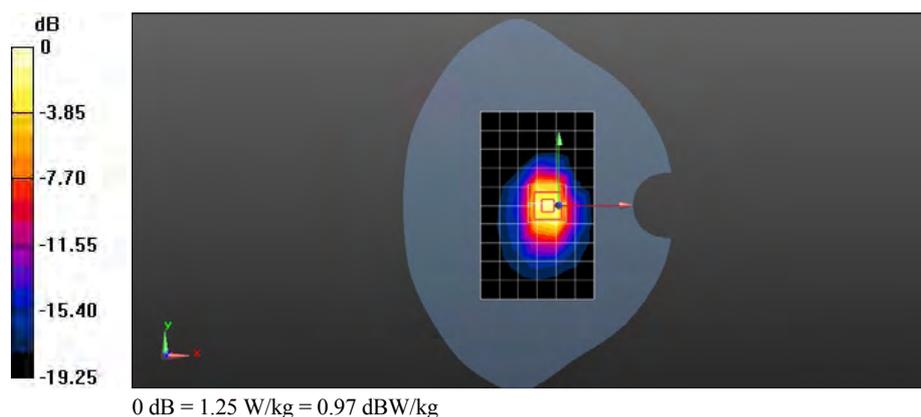

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 UMTS Band II 9538CH Bottom edge 10mm with battery 2#

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.521$ S/m; $\epsilon_r = 53.392$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.03 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.023 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.516 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

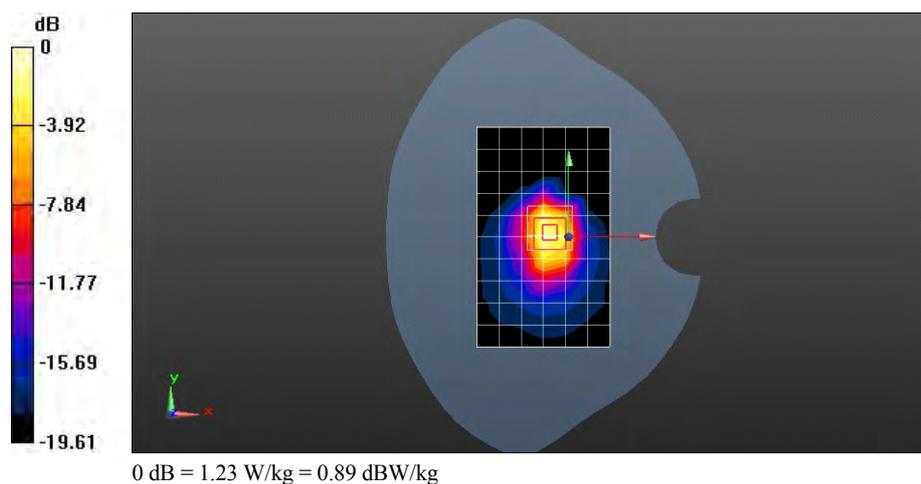

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WIFI 11b 11CH Left hand touch check

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.698$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 0.0538 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 6.132 V/m; Power Drift = -0.00 dB
 Peak SAR (extrapolated) = 0.360 W/kg
SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.021 W/kg
 Maximum value of SAR (measured) = 0.0590 W/kg

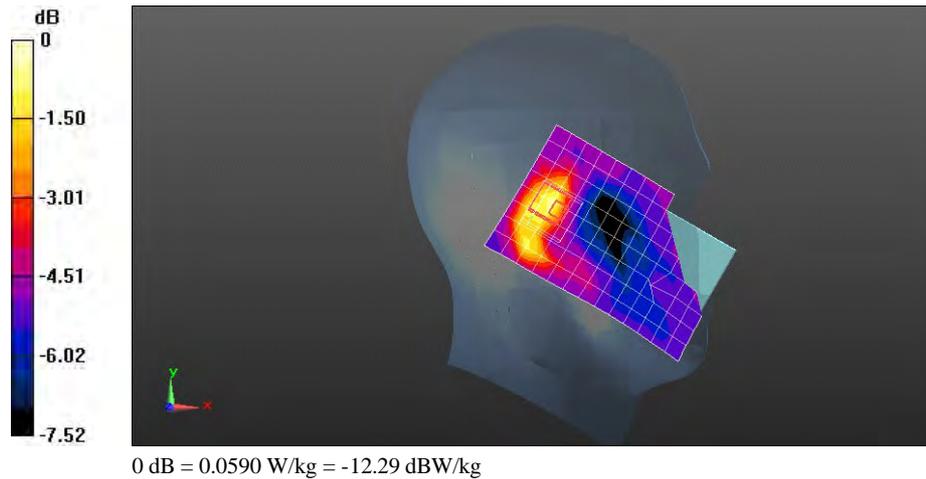

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WIFI 11b 11CH Left hand tilt 15 degree

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.698$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 0.0620 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 6.190 V/m; Power Drift = 0.19 dB
 Peak SAR (extrapolated) = 0.495 W/kg
SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.028 W/kg
 Maximum value of SAR (measured) = 0.0656 W/kg

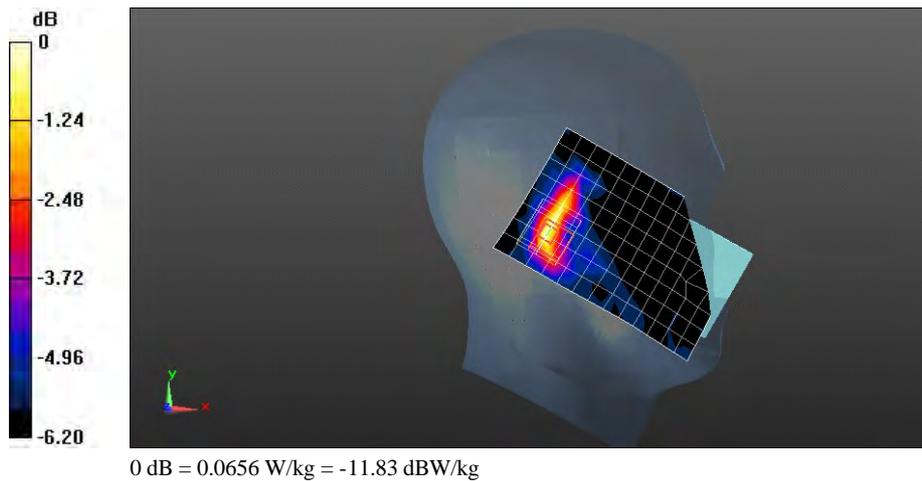

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WIFI 11b 11CH Right hand touch cheek

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1



Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.836 \text{ S/m}$; $\epsilon_r = 39.698$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 0.223 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.817 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.686 W/kg
SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.064 W/kg
 Maximum value of SAR (measured) = 0.367 W/kg

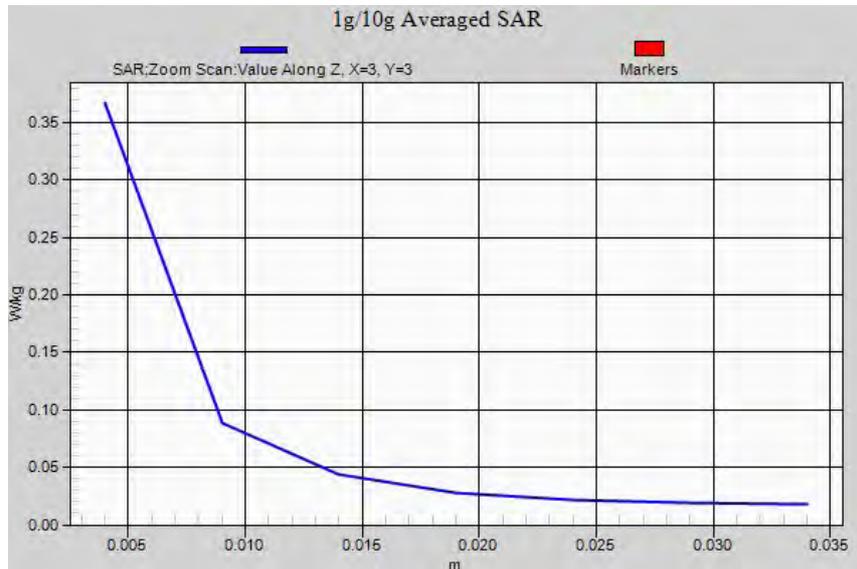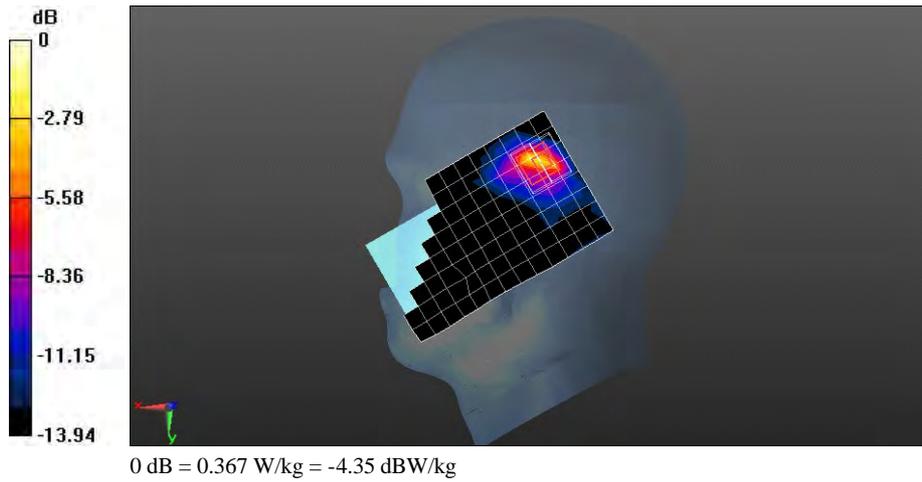

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WIFI 11b 11CH Right hand tilt 15 degree

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.698$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.153 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 5.964 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.560 W/kg
SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.042 W/kg
Maximum value of SAR (measured) = 0.290 W/kg

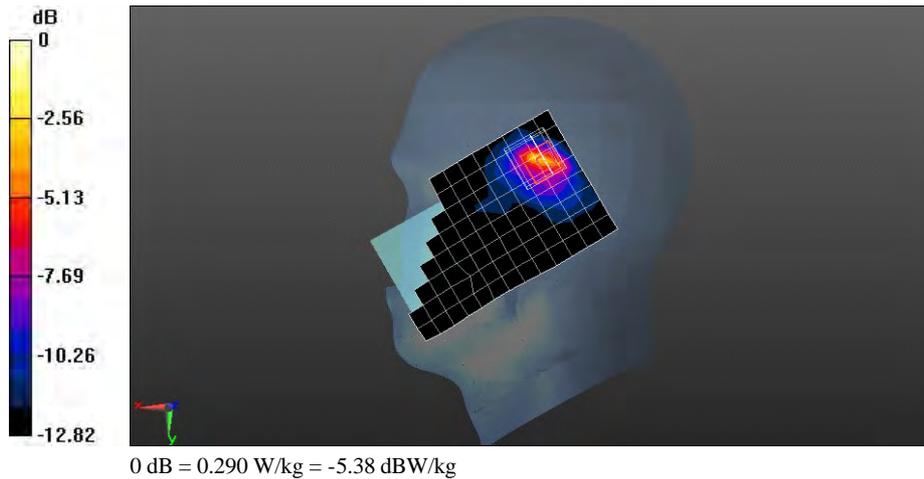

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WIFI 11b 1CH Right hand touch cheek

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 39.903$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.214 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.770 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.352 W/kg

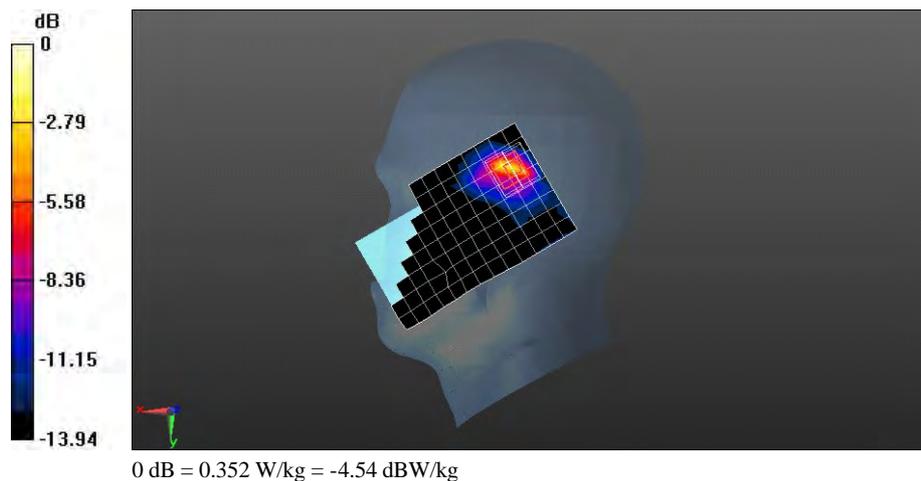

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WIFI 11b 6CH Right hand touch cheek

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.808$ S/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 0.218 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.793 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.670 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.358 W/kg

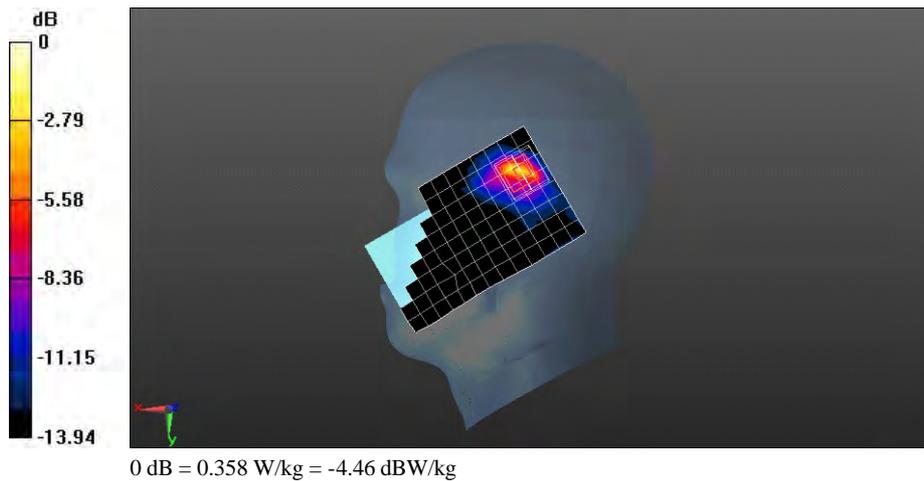

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WIFI 11b 11CH Right hand touch cheek with batter 2#

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.698$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 0.134 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 6.242 V/m; Power Drift = -0.14 dB
 Peak SAR (extrapolated) = 0.658 W/kg
SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.030 W/kg
 Maximum value of SAR (measured) = 0.176 W/kg

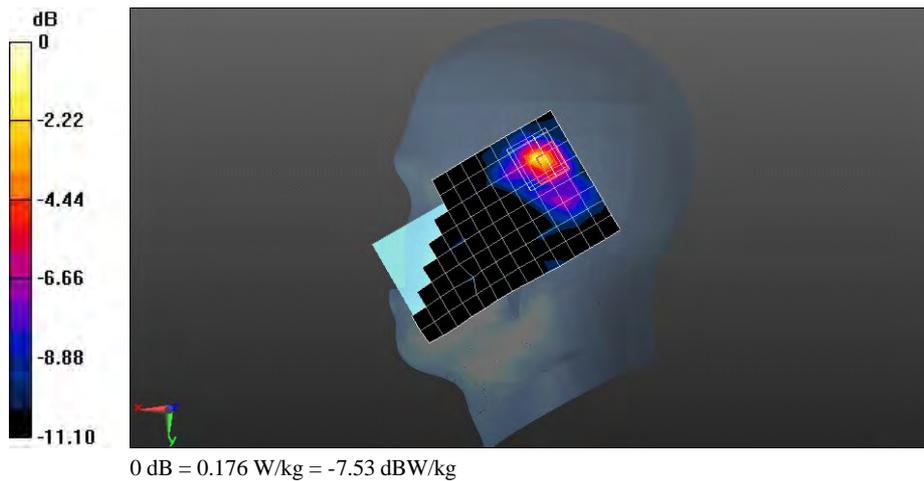

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WIFI 11b 11CH Left hand touch check -BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.836 \text{ S/m}$; $\epsilon_r = 39.698$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 0.206 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.657 V/m ; Power Drift = -0.13 dB
 Peak SAR (extrapolated) = 0.611 W/kg
SAR(1 g) = 0.204 W/kg ; SAR(10 g) = 0.060 W/kg
 Maximum value of SAR (measured) = 0.265 W/kg

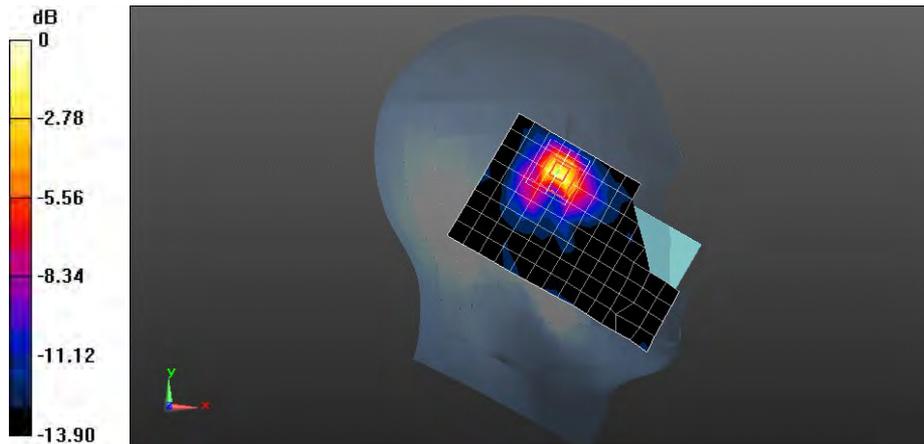

0 dB = $0.265 \text{ W/kg} = -5.77 \text{ dBW/kg}$



Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WIFI 11b 11CH Left hand tilt 15 degree-BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.698$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 0.0736 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.530 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.00383 W/kg

Maximum value of SAR (measured) = 0.0760 W/kg

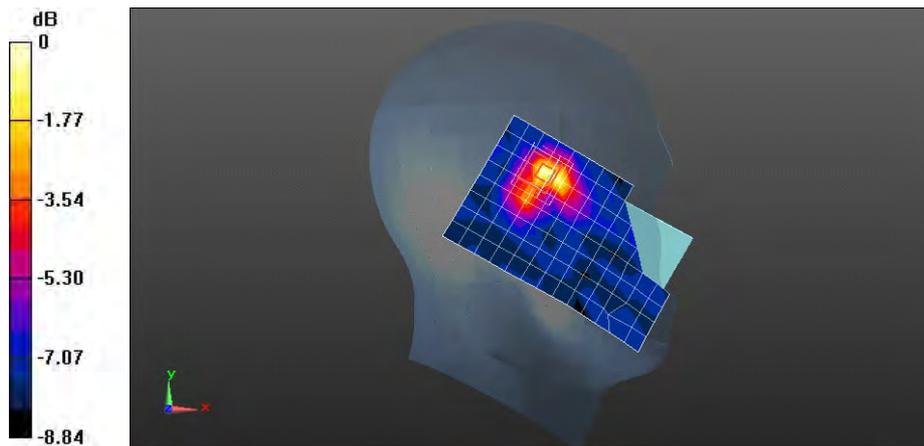

0 dB = 0.0760 W/kg = -11.19 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WIFI 11b 11CH Right hand touch check -BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.698$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 0.0527 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 3.514 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.0480 W/kg
SAR(1 g) = 0.00152 W/kg; SAR(10 g) = 0.000154 W/kg
 Maximum value of SAR (measured) = 0.0308 W/kg

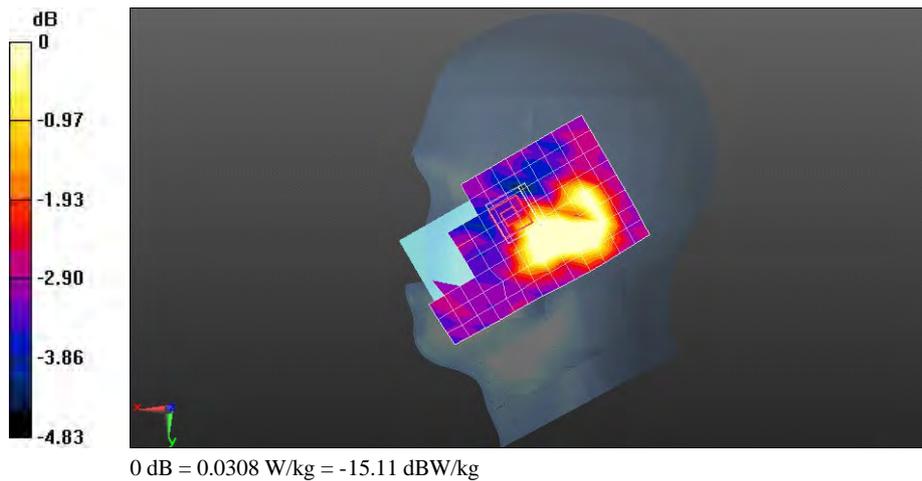

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WIFI 11b 11CH Right hand tilt 15 degree-BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.698$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 0.0429 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 3.017 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 0.0160 W/kg
SAR(1 g) = 2.11e-005 W/kg; SAR(10 g) = 1.97e-006 W/kg
 Maximum value of SAR (measured) = 0.0169 W/kg

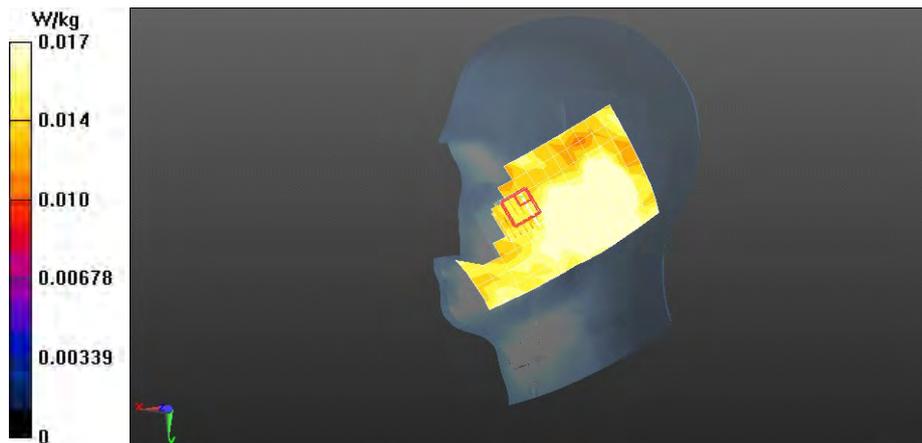

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WIFI 11b 1CH Left hand touch cheek -BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: WiFi (802.11*); Frequency: 2412 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 39.903$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 0.198 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 3.627 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.586 W/kg
SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.057 W/kg
 Maximum value of SAR (measured) = 0.253 W/kg

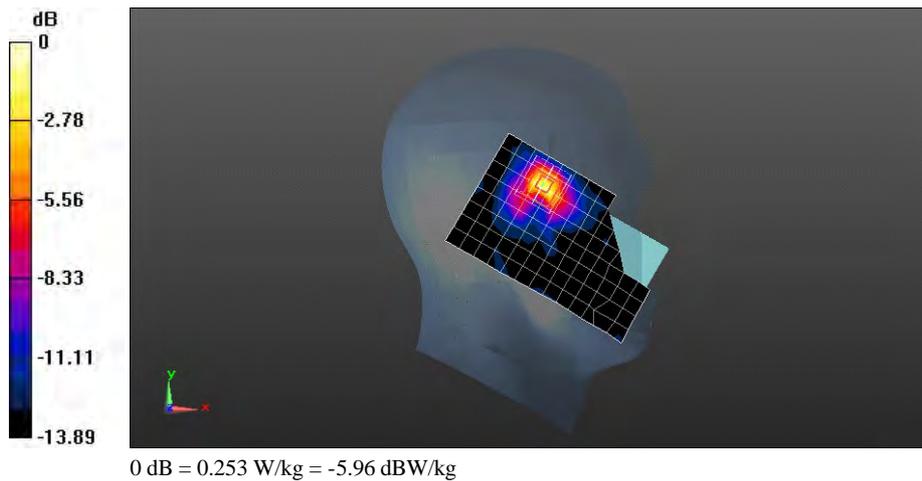

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WIFI 11b 6CH Left hand touch cheek -BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: WiFi (802.11*); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.808$ S/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 0.202 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 3.642 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.597 W/kg
SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.058 W/kg
 Maximum value of SAR (measured) = 0.258 W/kg

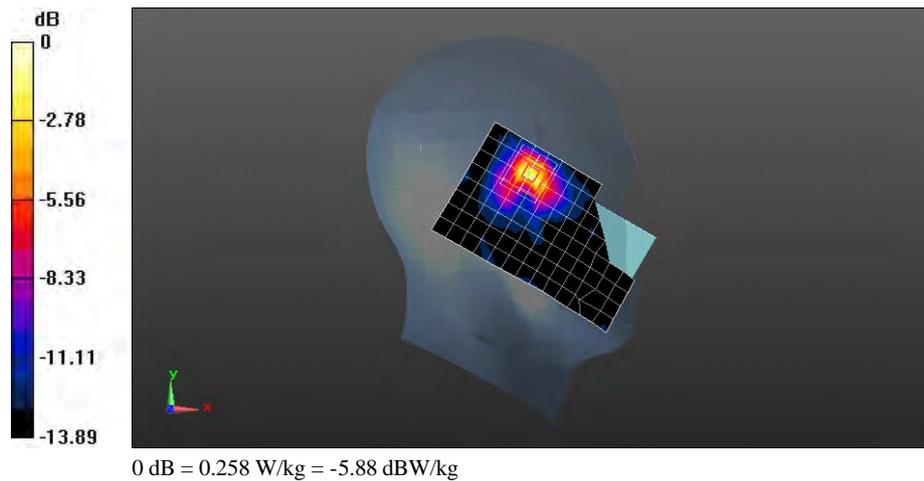

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WIFI 11b 11CH Left hand touch cheek-BG2 with batter 2#

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.698$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 2012-4-26;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 0.162 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.472 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.523 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.202 W/kg

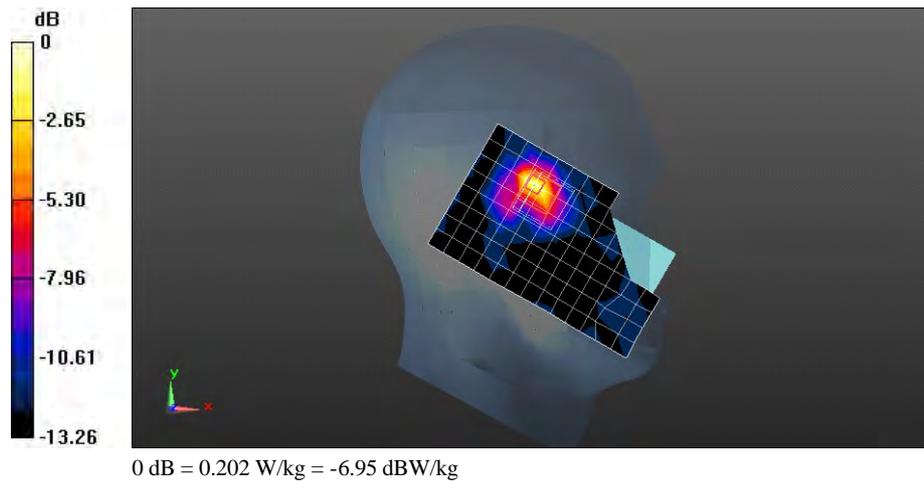

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Towards Phantom 15mm**DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1**

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0129 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.388 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.00936 W/kg; SAR(10 g) = 0.00124 W/kg

Maximum value of SAR (measured) = 0.0124 W/kg

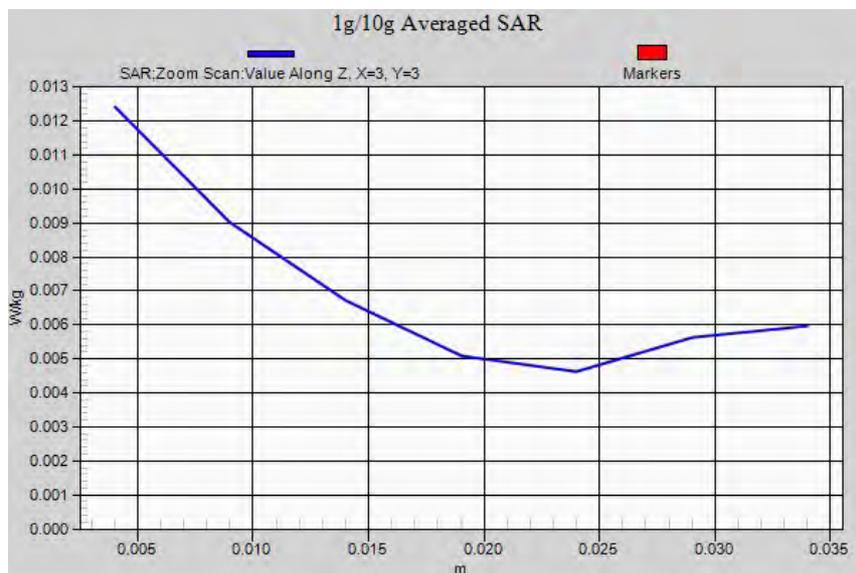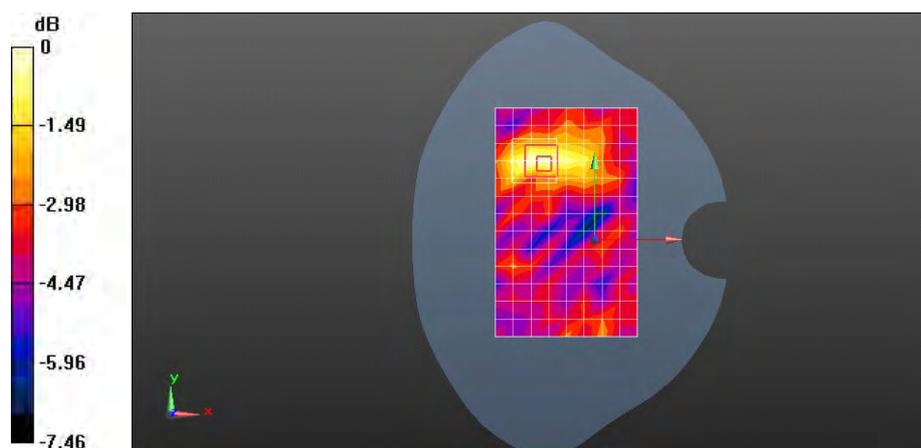

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Towards Ground 15mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.00942 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.426 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.00499 W/kg

SAR(1 g) = 0.000432 W/kg; SAR(10 g) = 4.38e-005 W/kg

Maximum value of SAR (measured) = 0.00664 W/kg

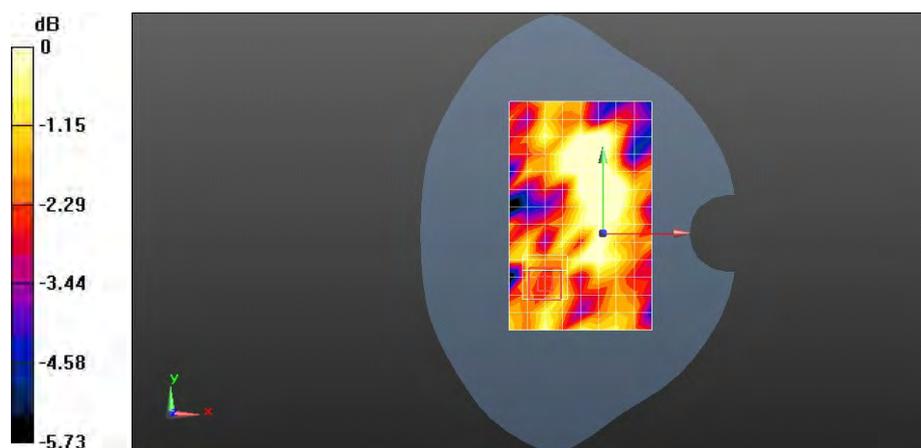

0 dB = 0.00664 W/kg = -21.78 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 1CH Towards Phantom 15mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2412 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.903$ S/m; $\epsilon_r = 51.343$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0123 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.377 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0590 W/kg

SAR(1 g) = 0.0081 W/kg; SAR(10 g) = 0.00118 W/kg

Maximum value of SAR (measured) = 0.0118 W/kg

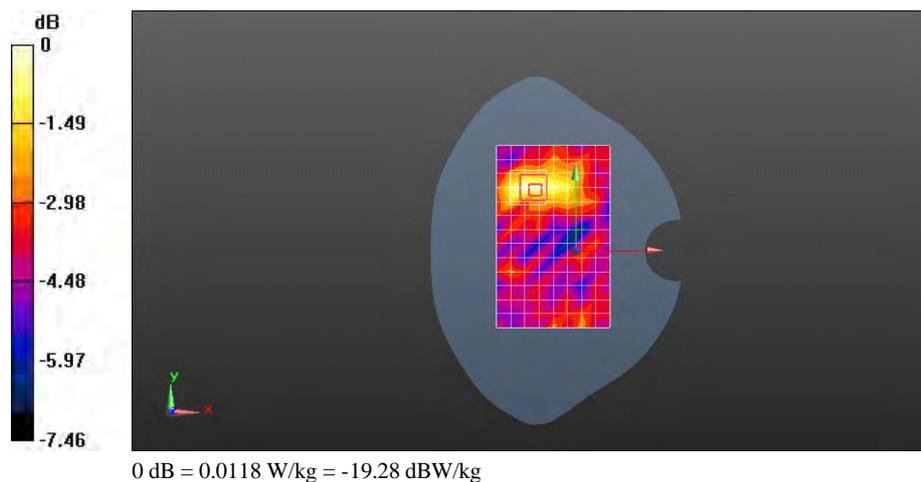

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 6CH Towards Phantom 15mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.937$ S/m; $\epsilon_r = 51.282$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0126 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.382 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0610 W/kg

SAR(1 g) = 0.00813 W/kg; SAR(10 g) = 0.00121 W/kg

Maximum value of SAR (measured) = 0.0121 W/kg

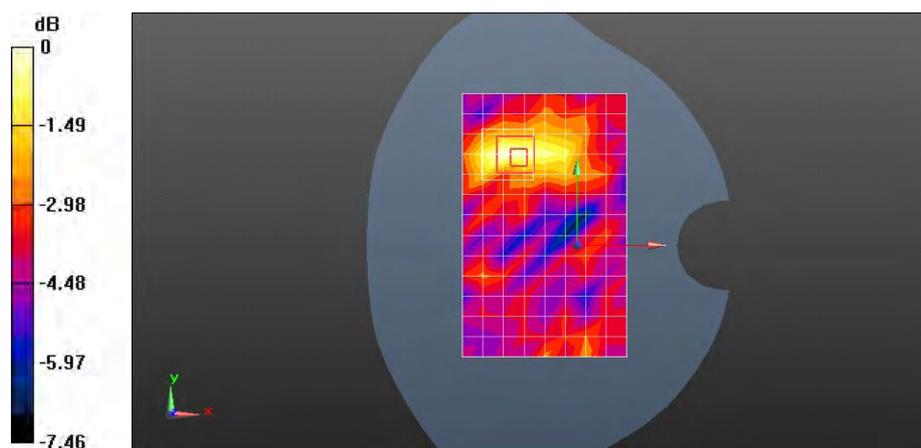

0 dB = 0.0121 W/kg = -19.17 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Towards Phantom 15mm with battery 2#

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0130 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.130 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0630 W/kg

SAR(1 g) = 0.00971 W/kg; SAR(10 g) = 0.00134 W/kg

Maximum value of SAR (measured) = 0.0143 W/kg

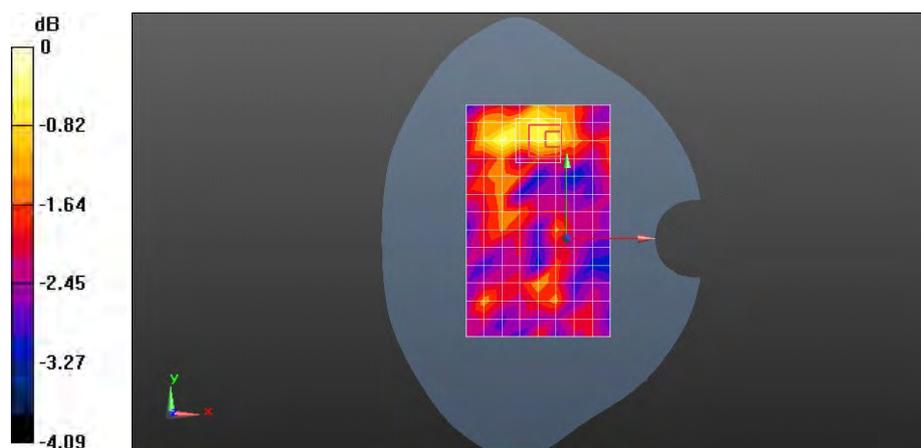

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Towards Phantom 15mm-BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 0.0148 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 1.900 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.0880 W/kg
SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00215 W/kg
 Maximum value of SAR (measured) = 0.0171 W/kg

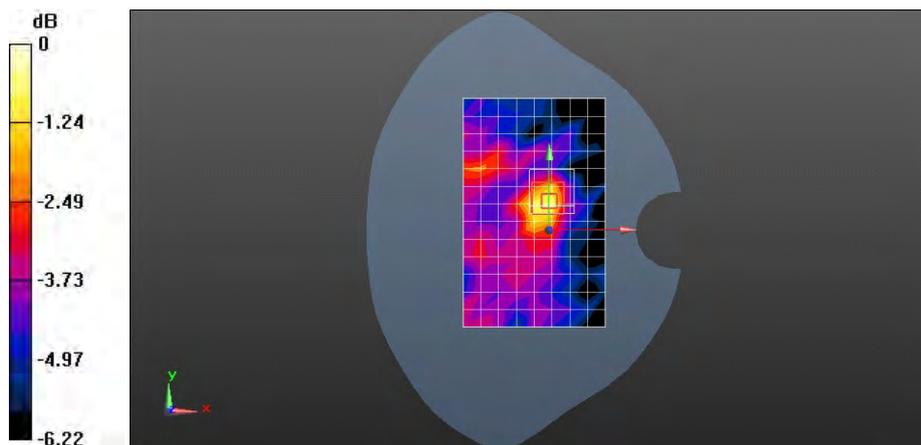

0 dB = 0.0171 W/kg = -17.67 dBW/kg



Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Towards Ground 15mm-BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0107 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.703 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0720 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.003 W/kg

Maximum value of SAR (measured) = 0.0115 W/kg

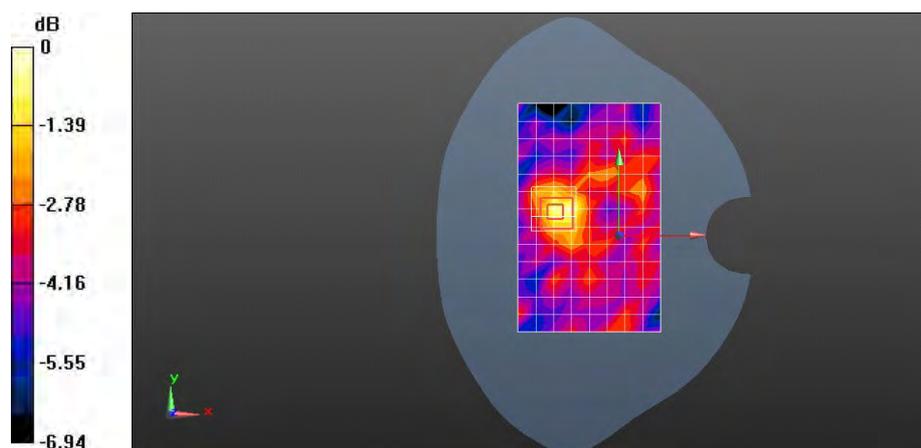

0 dB = 0.0115 W/kg = -19.39 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 1CH Towards Phantom 15mm-BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2412 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.903$ S/m; $\epsilon_r = 51.343$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0140 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.885 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00205 W/kg

Maximum value of SAR (measured) = 0.0163 W/kg

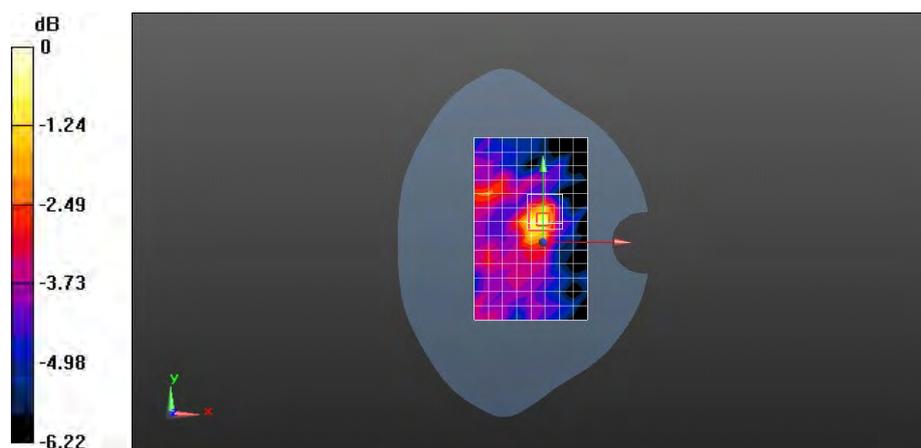

0 dB = 0.0163 W/kg = -17.89 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 6CH Towards Phantom 15mm-BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.937$ S/m; $\epsilon_r = 51.282$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0144 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.893 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.0021 W/kg

Maximum value of SAR (measured) = 0.0167 W/kg

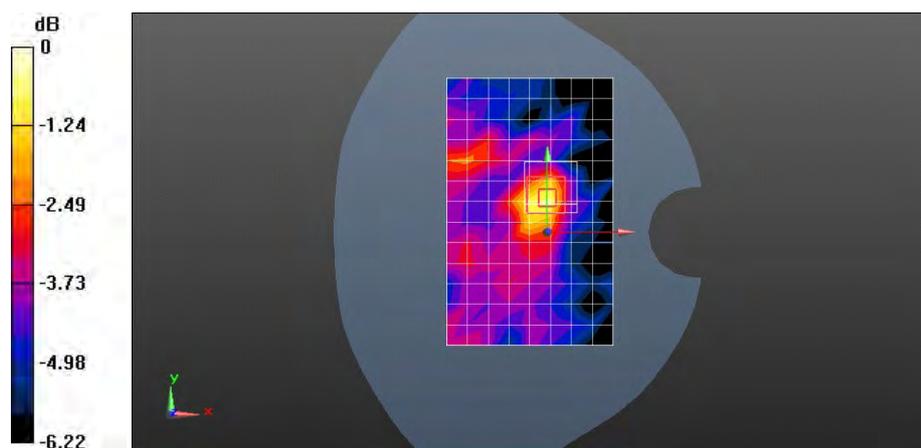

0 dB = 0.0167 W/kg = -17.77 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Towards Phantom 15mm-BG2 with battery 2#

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.859$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0139 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.900 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0830 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00203 W/kg

Maximum value of SAR (measured) = 0.0162 W/kg

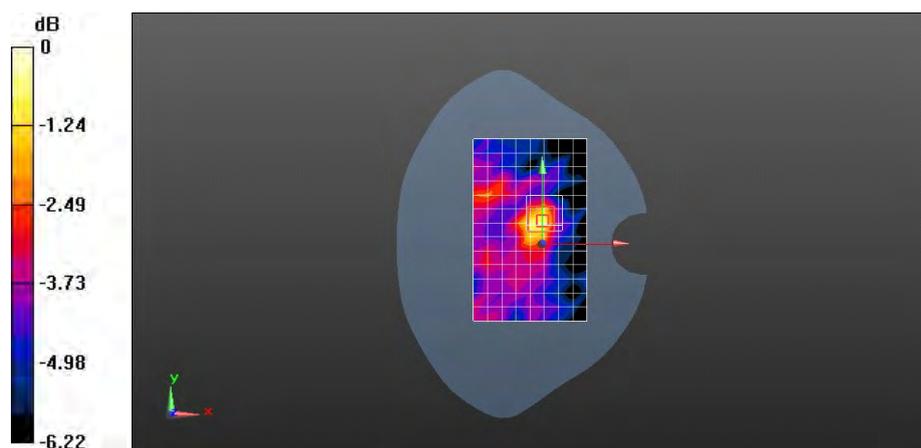

0 dB = 0.0162 W/kg = -17.92 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Towards Phantom 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:


- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 0.0260 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 2.407 V/m; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 0.146 W/kg
SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.011 W/kg
 Maximum value of SAR (measured) = 0.0330 W/kg

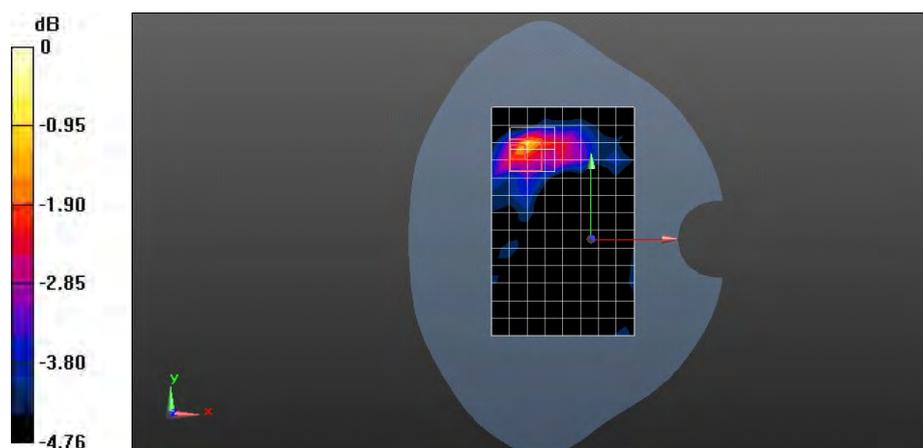

0 dB = 0.0330 W/kg = -14.81 dBW/kg

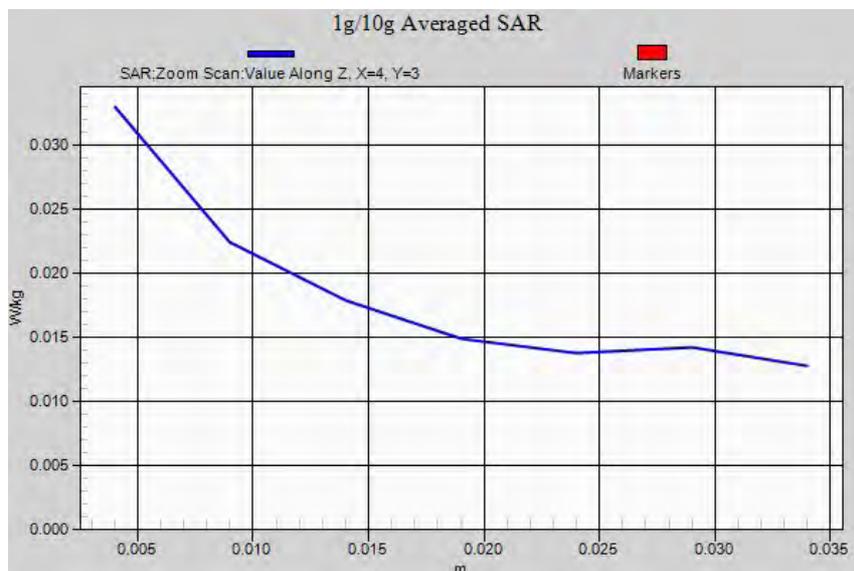

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Towards Ground 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0187 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.728 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.000275 W/kg; SAR(10 g) = 4.72e-005 W/kg

Maximum value of SAR (measured) = 0.0151 W/kg

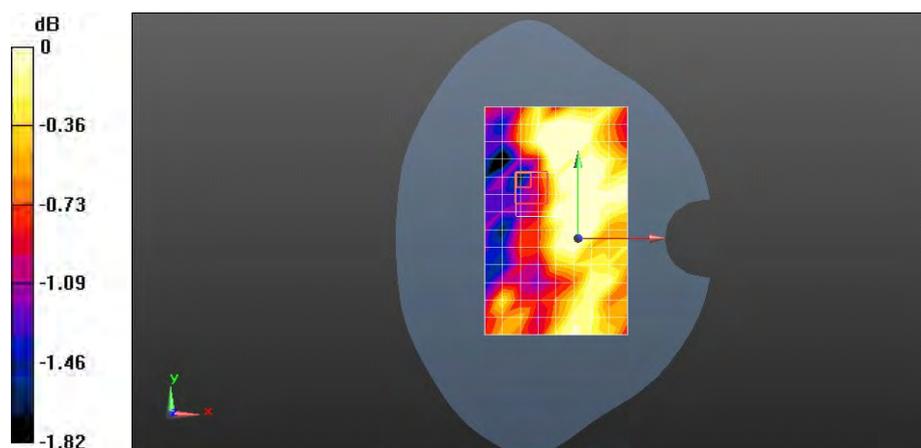

0 dB = 0.0151 W/kg = -18.22 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Left edge 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0192 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.081 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.0069 W/kg

Maximum value of SAR (measured) = 0.0198 W/kg

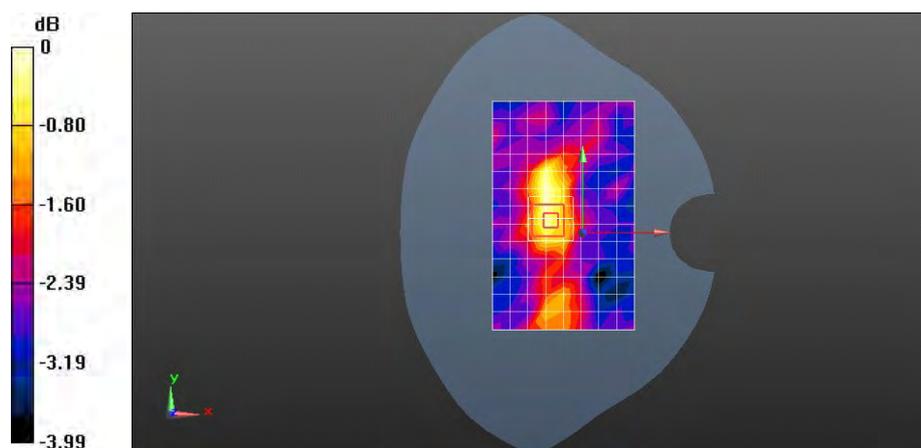

0 dB = 0.0198 W/kg = -17.04 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Top edge 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0155 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.631 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0820 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00596 W/kg

Maximum value of SAR (measured) = 0.0174 W/kg

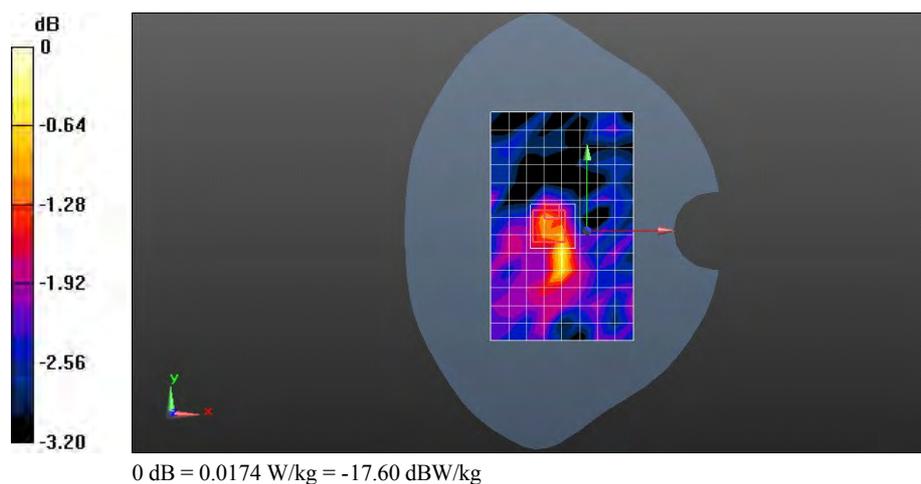

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 1CH Towards Phantom 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2412 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.903$ S/m; $\epsilon_r = 51.343$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0247 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.387 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0313 W/kg

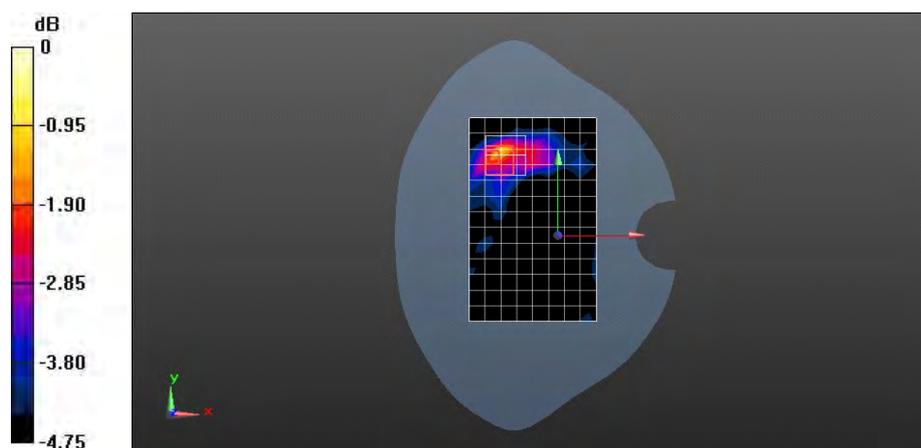

0 dB = 0.0313 W/kg = -15.04 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 6CH Towards Phantom 10mm

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.937$ S/m; $\epsilon_r = 51.282$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0254 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.397 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0322 W/kg

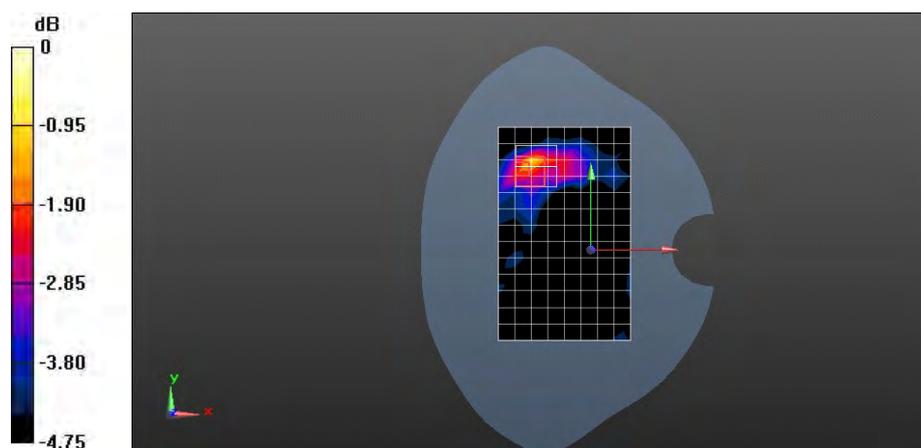

0 dB = 0.0322 W/kg = -14.93 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Towards Phantom 10mm with battery 2#

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0185 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.951 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00655 W/kg

Maximum value of SAR (measured) = 0.0190 W/kg

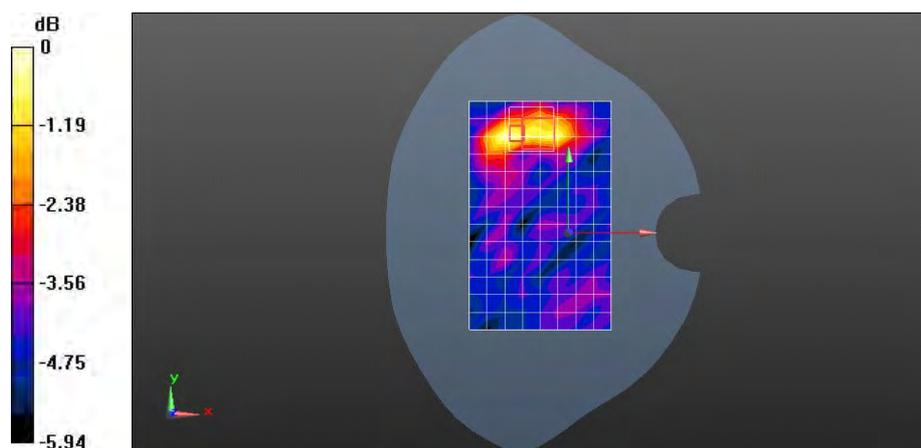

0 dB = 0.0190 W/kg = -17.21 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Towards Phantom 10mm-BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0273 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.452 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0323 W/kg

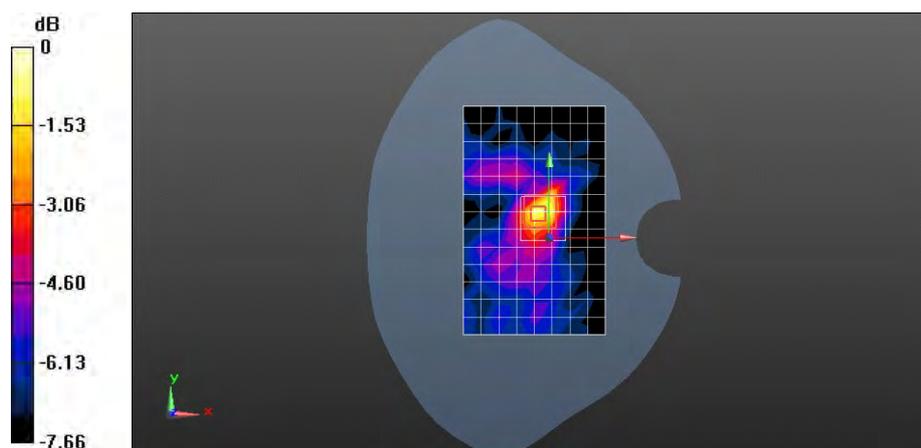

0 dB = 0.0323 W/kg = -14.91 dBW/kg



Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Towards Ground 10mm-BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0227 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.954 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0630 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.00865 W/kg

Maximum value of SAR (measured) = 0.0261 W/kg

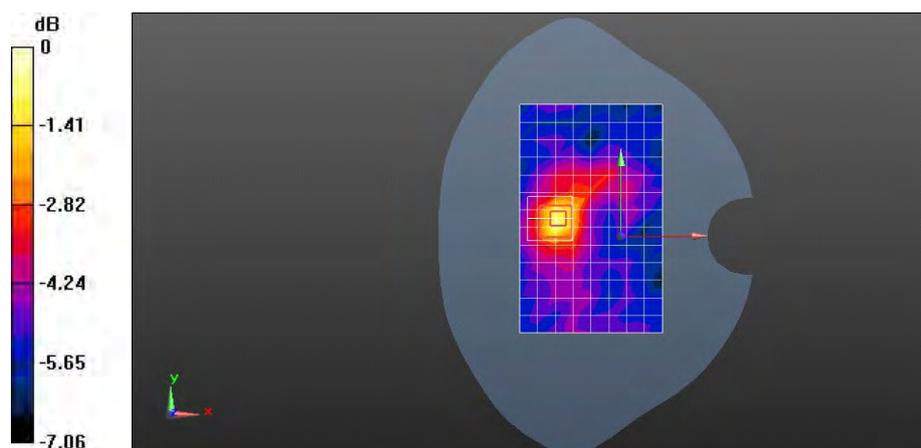

0 dB = 0.0261 W/kg = -15.83 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Right edge 10mm-BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1


Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 0.0302 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 2.780 V/m; Power Drift = -0.16 dB
 Peak SAR (extrapolated) = 0.0640 W/kg
SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.010 W/kg
 Maximum value of SAR (measured) = 0.0316 W/kg

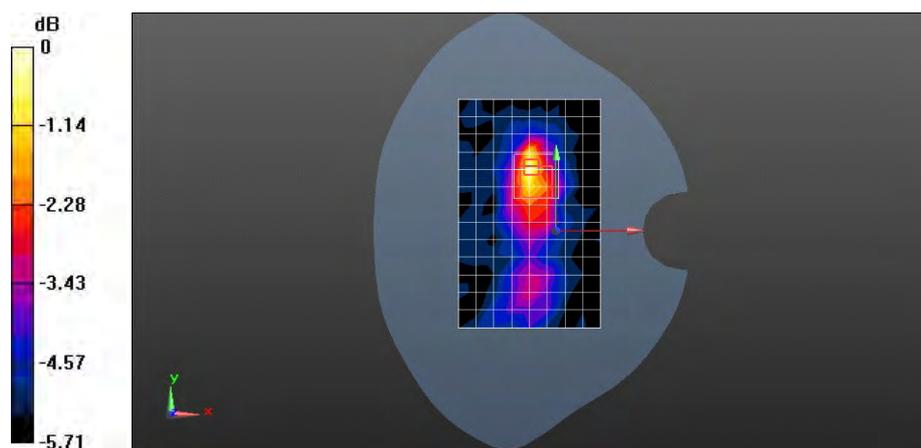

0 dB = 0.0316 W/kg = -15.00 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Top edge 10mm-BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0179 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.404 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.00451 W/kg

Maximum value of SAR (measured) = 0.0165 W/kg

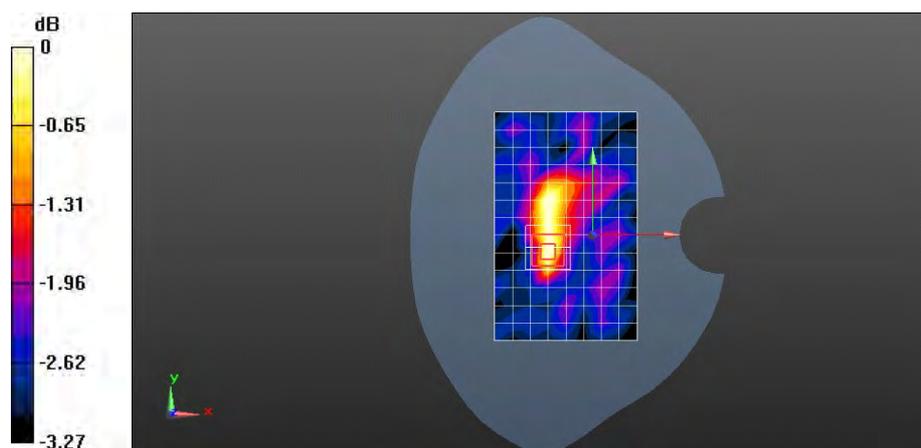

0 dB = 0.0165 W/kg = -17.83 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 1CH Towards Phantom 10mm-BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2412 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.903$ S/m; $\epsilon_r = 51.343$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0259 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.432 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0307 W/kg

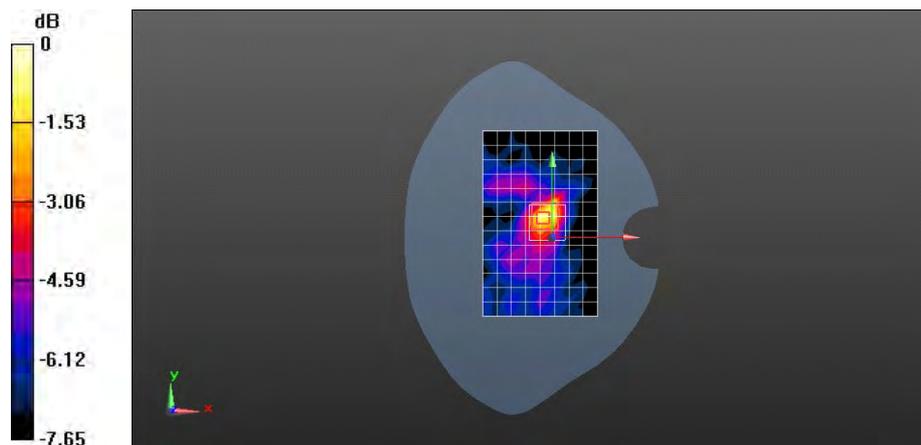

0 dB = 0.0307 W/kg = -15.13 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 6CH Towards Phantom 10mm-BG2

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.937$ S/m; $\epsilon_r = 51.282$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0266 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.442 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0315 W/kg

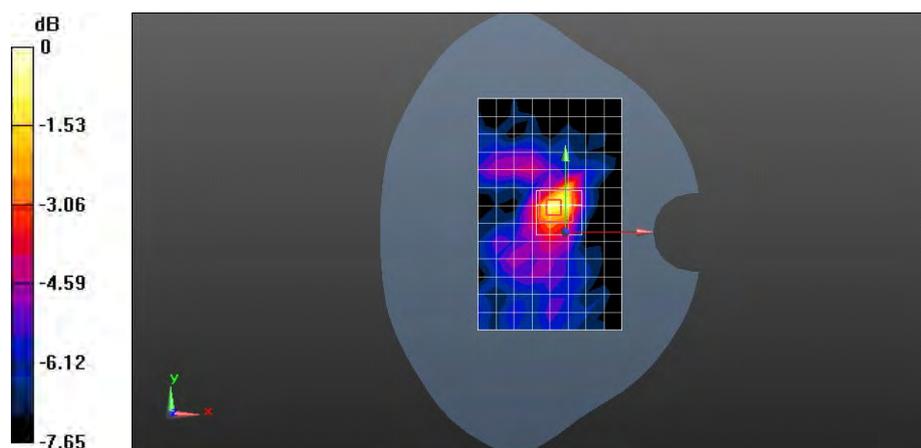

0 dB = 0.0315 W/kg = -15.02 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

P6-U06 WiFi 802.11b 11CH Towards Phantom 10mm-BG2 with battery 2#

DUT: HUAWEI P6-U06, P6-U06; Type: Smart Phone; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 51.105$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0265 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.452 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0313 W/kg

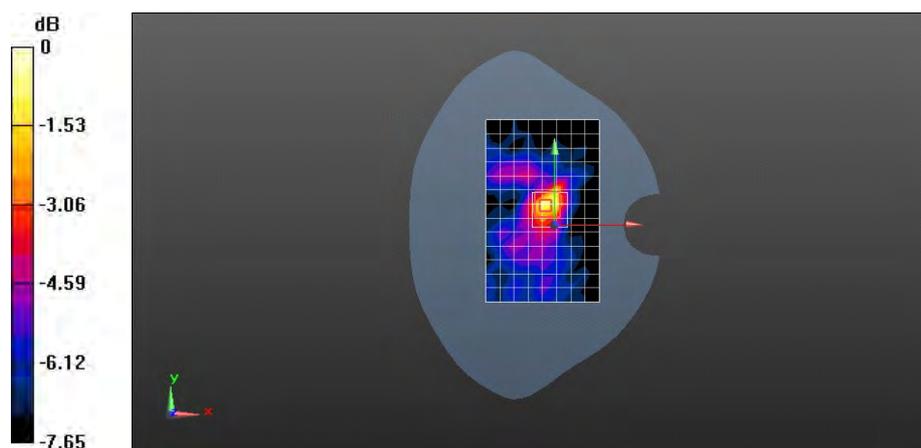

0 dB = 0.0313 W/kg = -15.05 dBW/kg