

# FCC PART 15.247

## TEST REPORT

For

### Huawei Technologies Co.,Ltd

Administration Building, Headquarters of Huawei Technologies Co.,Ltd., Bantian, Longgang District,  
Shenzhen, 518129, P.R.C

**FCC ID: QISPRU11WIFI**

<b>Report Type:</b> Original Report	<b>Product Type:</b> pico Remote Radio Unit
<b>Test Engineer:</b> Dean Liu	<i>Dean Liu</i>
<b>Report Number:</b> RDG160503005-00A	
<b>Report Date:</b> 2016-05-16	
<b>Reviewed By:</b> Jerry Zhang EMC Manager	<i>Jerry Zhang</i>
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
TEST FACILITY.....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION.....	5
EUT EXERCISE SOFTWARE.....	5
SUPPORT EQUIPMENT LIST AND DETAILS.....	6
EXTERNAL CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP.....	6
<b>SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>8</b>
APPLICABLE STANDARD.....	8
ANTENNA CONNECTOR CONSTRUCTION.....	8
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS.....</b>	<b>9</b>
APPLICABLE STANDARD.....	9
MEASUREMENT UNCERTAINTY.....	9
EUT SETUP.....	9
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE.....	10
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	10
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST RESULTS SUMMARY.....	11
TEST DATA.....	11
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>14</b>
APPLICABLE STANDARD.....	14
MEASUREMENT UNCERTAINTY.....	14
EUT SETUP.....	14
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	15
TEST PROCEDURE.....	15
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST RESULTS SUMMARY.....	16
TEST DATA.....	16
<b>FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....</b>	<b>33</b>
APPLICABLE STANDARD.....	33
TEST PROCEDURE.....	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA.....	33
<b>FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....</b>	<b>47</b>
APPLICABLE STANDARD.....	47
TEST PROCEDURE.....	47
TEST EQUIPMENT LIST AND DETAILS.....	47
TEST DATA.....	47

**FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....49**  
    APPLICABLE STANDARD .....49  
    TEST PROCEDURE .....49  
    TEST EQUIPMENT LIST AND DETAILS.....49  
    TEST DATA .....49

**FCC §15.247(e) - POWER SPECTRAL DENSITY .....58**  
    APPLICABLE STANDARD .....58  
    TEST PROCEDURE .....58  
    TEST EQUIPMENT LIST AND DETAILS.....58  
    TEST DATA .....58

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *Huawei Technologies Co.,Ltd*'s product, model number: *pRRU3911+WIFI* (FCC ID: *QISPRU11WIFI*) (the "EUT") in this report was a *pico Remote Radio Unit*, which was measured approximately: 200 mm (W) x 200 mm (D) x 40 mm (H), rated input voltage: -48V DC powered by POE.

*All measurement and test data in this report was gathered from production sample serial number: 160503005 (Assigned by BACL, Dongguan). The EUT was received on 2016-05-03.*

### Objective

This report is prepared on behalf of *Huawei Technologies Co.,Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15E NII and part 22/24/27 PCB submissions with FCC ID: QISPRU11WIFI.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer.

For 2.4G band, the device support 2 x 2 MIMO at 802.11b,g and n system, and 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n20 modes were tested with Channel 1, 6 and 11.

For 802.11n40 mode were tested with Channel 3, 6 and 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

### EUT Exercise Software

The test CMD Command was used in testing, which was provided by manufacturer, and configured maximum power (100% dutycycle) as following table:

Software and version			CMD Command			
Mode	Channel	Frequency (MHz)	Data Rate (Mbps)		Power Level	
			Chain 0	Chain 1	Chain 0	Chain 1
802.11 b	Low	2412	11	11	16	16
	Middle	2437	11	11	16	16
	High	2462	11	11	16	16
802.11 g	Low	2412	54	54	16	16
	Middle	2437	54	54	16	16
	High	2462	54	54	16	16
802.11 n20	Low	2412	MCS7	MCS7	16	16
	Middle	2437	MCS7	MCS7	16	16
	High	2462	MCS7	MCS7	16	16
802.11 n40	Low	2422	MCS15	MCS15	16	16
	Middle	2437	MCS15	MCS15	16	16
	High	2452	MCS15	MCS15	16	16


**Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	G510	CB30920865
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	0293
HUAWEI	POE Adapter	PoE35-54A	2102220369ARF7000631

**External Cable**

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	No	No	1.5	RJ45 Port of POE	EUT
RJ45 Cable	No	No	1.5	RJ45 Port of Laptop	EUT
Printer Cable	Yes	No	1.2	Parallel Port of Laptop	Printer
Serial Cable	Yes	No	1.2	Serial Port of Laptop	Modem
Keyboard Cable	Yes	No	1.5	Keyboard Port of Laptop	Keyboard

**Block Diagram of Test Setup**

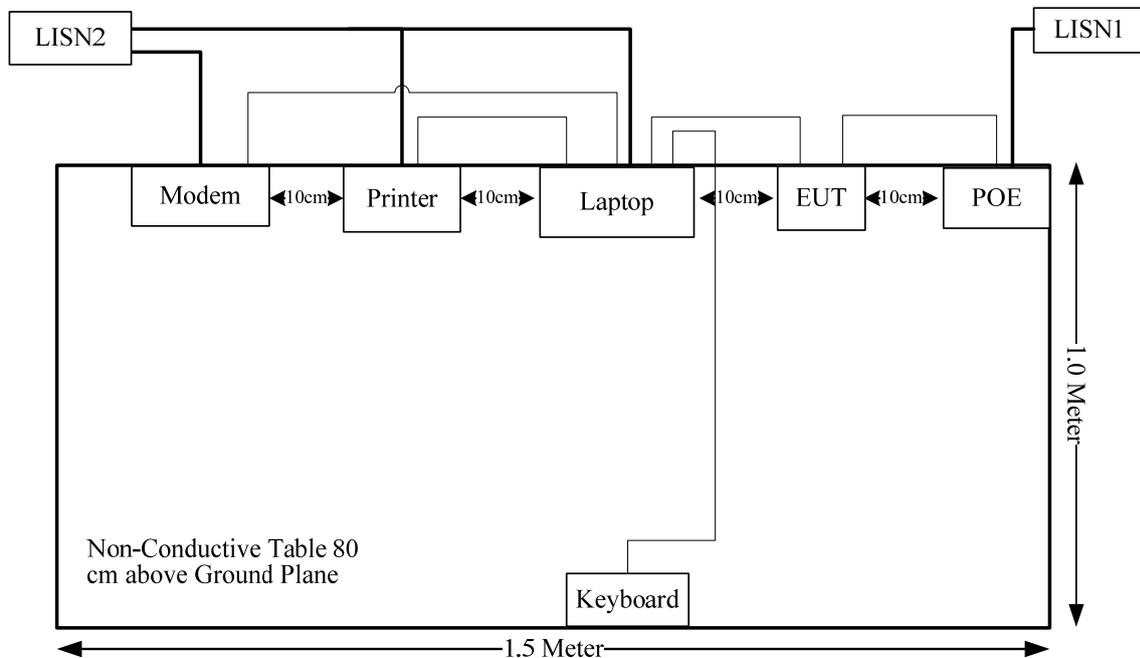

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum conducted output power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance
FCC §15.247 (i) & §1.1310 & §2.1091	RF Exposure	Compliance*

Compliance\*: please refer to the RF exposure report: SYBH(R)02376164EB-2. Which issued by Global Compliance and Testing Center of Huawei Technologies Co., Ltd. On 2016-5-18.

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

### **Antenna Connector Construction**

The EUT have 2 internal antennas and the gain of each antenna is 5.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS**

**Applicable Standard**

FCC§15.207

**Measurement Uncertainty**

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{cispr}$

Measurement	$U_{cispr}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

**EUT Setup**

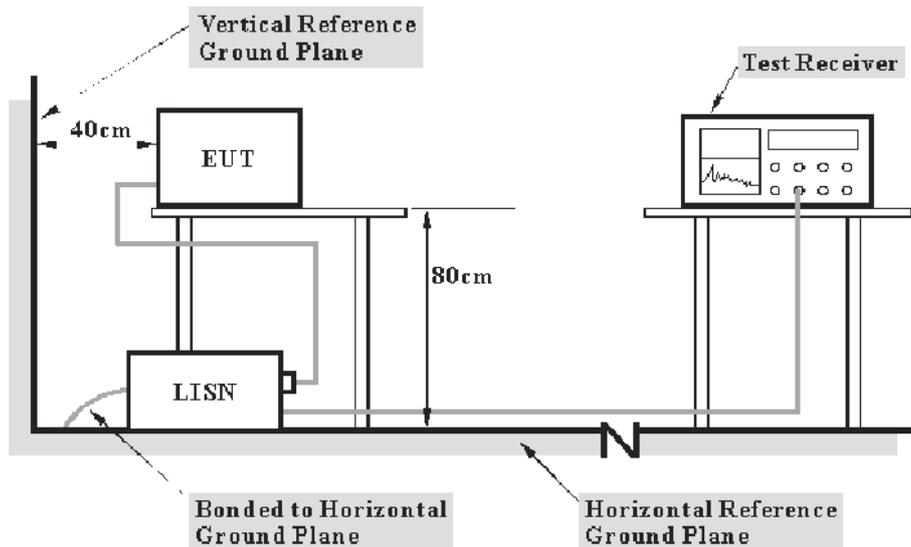

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The POE was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN

$C_f$ : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-12-10	2016-12-09
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-07-16	2016-07-15
R&S	Two-line V-network	ENV 216	3560.6550.12	2015-11-26	2016-11-25
N/A	Coaxial Cable	1.8m	N/A	2016-05-06	2017-05-06
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

**8.2 dB at 0.412647 MHz in the Line conducted mode**

### Test Data


#### Environmental Conditions

<b>Temperature:</b>	28.7°C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	100.4 kPa

*The testing was performed by Dean Liu on 2016-05-12.*

Test Mode: Transmitting


AC120 V, 60 Hz, Line:

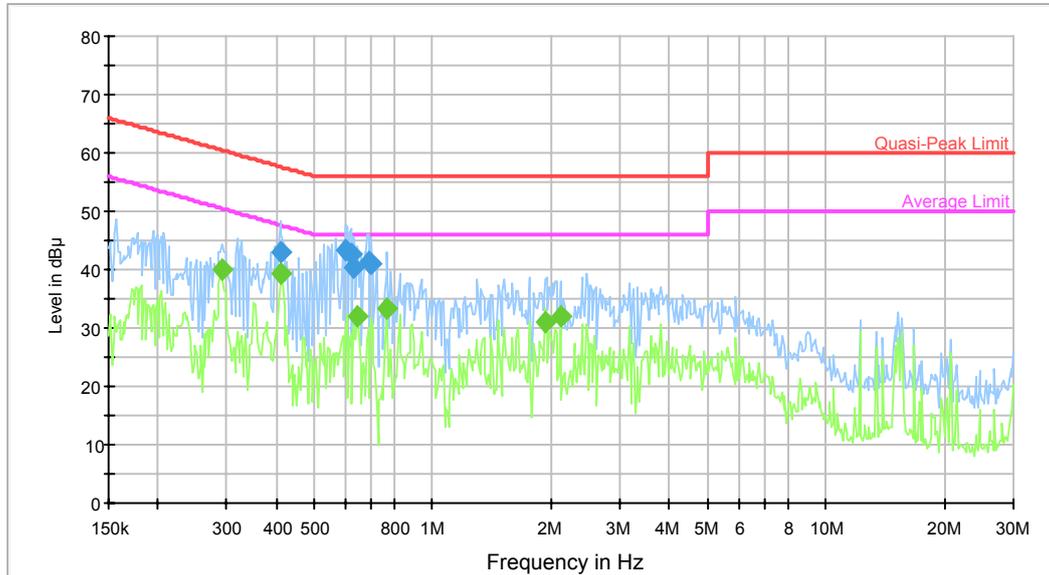

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.409372	42.9	9.000	L1	10.2	14.8	57.7	Compliance
0.600101	43.3	9.000	L1	10.2	12.7	56.0	Compliance
0.619536	42.8	9.000	L1	10.3	13.2	56.0	Compliance
0.629488	40.3	9.000	L1	10.3	15.7	56.0	Compliance
0.687153	41.4	9.000	L1	10.4	14.6	56.0	Compliance
0.698191	41.1	9.000	L1	10.4	14.9	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.290613	40.1	9.000	L1	10.2	10.4	50.5	Compliance
0.412647	39.4	9.000	L1	10.2	8.2	47.6	Compliance
0.644717	31.9	9.000	L1	10.4	14.1	46.0	Compliance
0.768247	33.3	9.000	L1	10.4	12.7	46.0	Compliance
1.936076	31.1	9.000	L1	10.4	14.9	46.0	Compliance
2.113432	32.1	9.000	L1	10.4	13.9	46.0	Compliance

**AC120 V, 60 Hz, Neutral:**

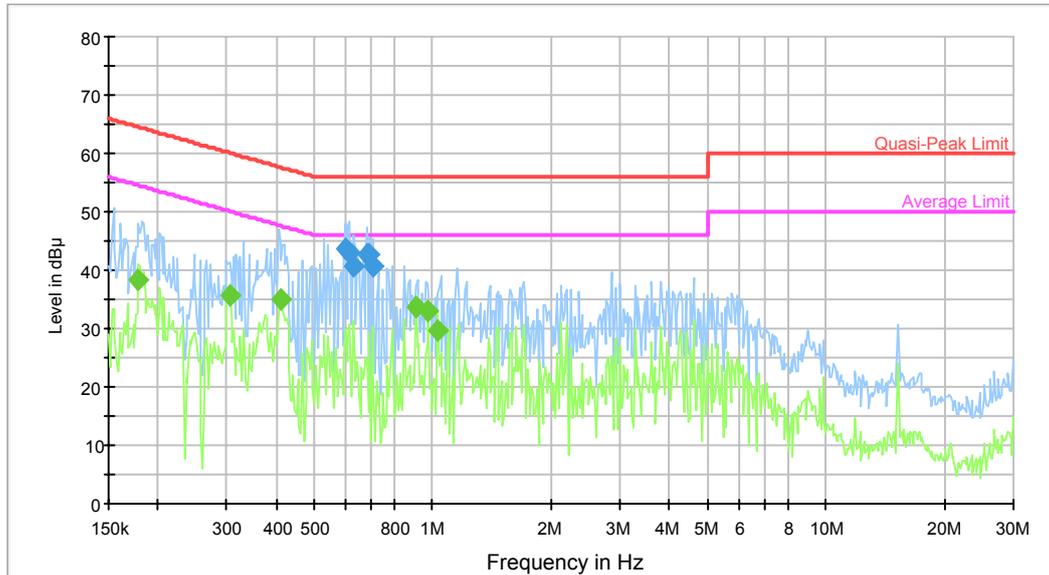

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.600101	43.7	9.000	N	10.2	12.3	56.0	Compliance
0.614619	43.2	9.000	N	10.3	12.8	56.0	Compliance
0.629488	40.6	9.000	N	10.3	15.4	56.0	Compliance
0.681699	42.8	9.000	N	10.4	13.2	56.0	Compliance
0.692650	42.8	9.000	N	10.4	13.2	56.0	Compliance
0.703777	40.7	9.000	N	10.4	15.3	56.0	Compliance

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.178741	38.4	9.000	N	10.1	16.1	54.5	Compliance
0.304845	35.7	9.000	N	10.3	14.4	50.1	Compliance
0.409372	35.1	9.000	N	10.2	12.6	47.7	Compliance
0.908180	33.8	9.000	N	10.4	12.2	46.0	Compliance
0.975701	32.9	9.000	N	10.4	13.1	46.0	Compliance
1.031669	29.6	9.000	N	10.4	16.4	46.0	Compliance

**FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**

**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

**Measurement Uncertainty**

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB.

Table 2 – Values of  $U_{cispr}$


Measurement	$U_{cispr}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

**EUT Setup**

**Below 1GHz:**

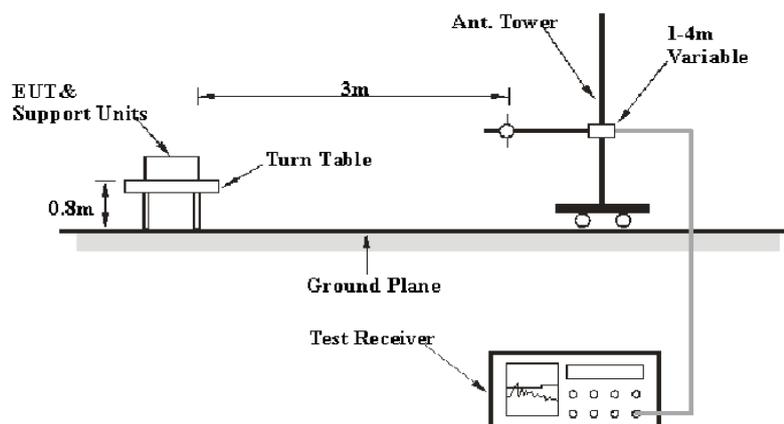

**Above 1GHz:**

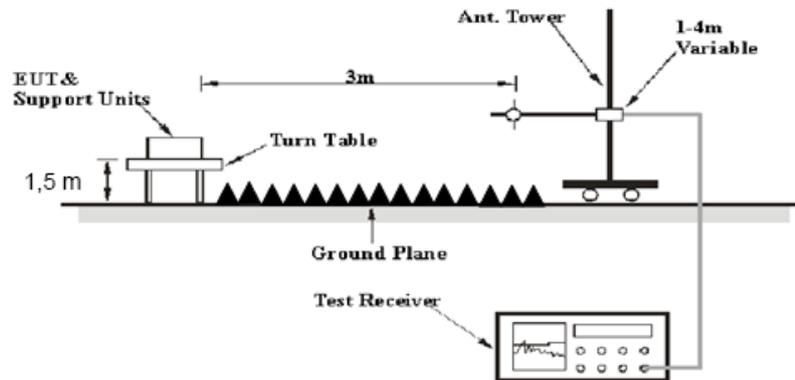

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

**Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

**Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
R&S	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS LINDGREN	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2016-02-19	2017-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2015-09-06	2016-09-06
N/A	Coaxial Cable	14m	N/A	2016-05-06	2017-05-06
N/A	Coaxial Cable	8m	N/A	2016-05-06	2017-05-06
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

**1.37 dB at 2483.5 MHz in the Horizontal polarization for WiFi Mode (802.11 n40)**

### Test Data

#### Environmental Conditions

Temperature:	25.1 °C
Relative Humidity:	65 %
ATM Pressure:	101.2kPa

\* The testing was performed by Dean Liu on 2016-05-14.

Test Mode: Transmitting

802.11b Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	79.19	PK	H	25.67	3.68	0.00	108.54	N/A	N/A
2412	71.19	AV	H	25.67	3.68	0.00	100.54	N/A	N/A
2412	70.71	PK	V	25.67	3.68	0.00	100.06	N/A	N/A
2412	62.7	AV	V	25.67	3.68	0.00	92.05	N/A	N/A
2400	28.88	PK	H	25.64	3.65	0.00	58.17	74.00	15.83
2400	17.01	AV	H	25.64	3.65	0.00	46.30	54.00	7.70
4824	30.73	PK	H	30.64	5.03	27.41	38.99	74.00	35.01
4824	18.39	AV	H	30.64	5.03	27.41	26.65	54.00	27.35
7236	31.54	PK	H	34.17	6.65	25.90	46.46	74.00	27.54
7236	19.05	AV	H	34.17	6.65	25.90	33.97	54.00	20.03
9648	32.5	PK	H	36.76	8.55	27.46	50.35	74.00	23.65
9648	20.19	AV	H	36.76	8.55	27.46	38.04	54.00	15.96
3131	31.16	PK	H	27.62	6.93	27.43	38.28	74.00	35.72
3131	19.02	AV	H	27.62	6.93	27.43	26.14	54.00	27.86
405.39	32.8	QP	H	16.37	2.44	21.78	29.83	46.00	16.17
Middle Channel: 2437 MHz									
2437	79.49	PK	H	25.74	3.75	0.00	108.98	N/A	N/A
2437	71.38	AV	H	25.74	3.75	0.00	100.87	N/A	N/A
2437	72	PK	V	25.74	3.75	0.00	101.49	N/A	N/A
2437	64.09	AV	V	25.74	3.75	0.00	93.58	N/A	N/A
4874	31.09	PK	H	30.77	5.14	27.42	39.58	74.00	34.42
4874	18.76	AV	H	30.77	5.14	27.42	27.25	54.00	26.75
7311	31.78	PK	H	34.35	6.74	25.88	46.99	74.00	27.01
7311	19.28	AV	H	34.35	6.74	25.88	34.49	54.00	19.51
9748	32.68	PK	H	36.80	8.61	27.24	50.85	74.00	23.15
9748	20.38	AV	H	36.80	8.61	27.24	38.55	54.00	15.45
3131	31.29	PK	H	27.62	6.93	27.43	38.41	74.00	35.59
3131	19.21	AV	H	27.62	6.93	27.43	26.33	54.00	27.67
3226	32.16	PK	H	27.92	6.20	27.35	38.93	74.00	35.07
3226	19.89	AV	H	27.92	6.20	27.35	26.66	54.00	27.34
405.39	32.9	QP	H	16.37	2.44	21.78	29.93	46.00	16.07
High Channel: 2462 MHz									
2462	80.73	PK	H	25.80	3.75	0.00	110.28	N/A	N/A
2462	72.58	AV	H	25.80	3.75	0.00	102.13	N/A	N/A
2462	73.86	PK	V	25.80	3.75	0.00	103.41	N/A	N/A
2462	66.43	AV	V	25.80	3.75	0.00	95.98	N/A	N/A
2483.5	28.34	PK	H	25.86	3.67	0.00	57.87	74.00	16.13
2483.5	15.52	AV	H	25.86	3.67	0.00	45.05	54.00	8.95
4924	31.41	PK	H	30.90	5.34	27.43	40.22	74.00	33.78
4924	19.14	AV	H	30.90	5.34	27.43	27.95	54.00	26.05
7386	32.18	PK	H	34.53	6.83	25.86	47.68	74.00	26.32
7386	19.66	AV	H	34.53	6.83	25.86	35.16	54.00	18.84
9848	32.92	PK	H	36.84	8.66	26.94	51.48	74.00	22.52
9848	20.61	AV	H	36.84	8.66	26.94	39.17	54.00	14.83
3131	31.45	PK	H	27.62	6.93	27.43	38.57	74.00	35.43
3131	19.29	AV	H	27.62	6.93	27.43	26.41	54.00	27.59
405.39	33.1	QP	H	16.37	2.44	21.78	30.13	46.00	15.87

802.11g Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	81.27	PK	H	25.67	3.68	0.00	110.62	N/A	N/A
2412	67.8	AV	H	25.67	3.68	0.00	97.15	N/A	N/A
2412	74.12	PK	V	25.67	3.68	0.00	103.47	N/A	N/A
2412	61.46	AV	V	25.67	3.68	0.00	90.81	N/A	N/A
2390	32.39	PK	H	25.61	3.63	0.00	61.63	74.00	12.37
2390	15.52	AV	H	25.61	3.63	0.00	44.76	54.00	9.24
4824	31.3	PK	H	30.64	5.03	27.41	39.56	74.00	34.44
4824	19.05	AV	H	30.64	5.03	27.41	27.31	54.00	26.69
7236	32.56	PK	H	34.17	6.65	25.90	47.48	74.00	26.52
7236	20.28	AV	H	34.17	6.65	25.90	35.20	54.00	18.80
9648	31.9	PK	H	36.76	8.55	27.46	49.75	74.00	24.25
9648	19.65	AV	H	36.76	8.55	27.46	37.50	54.00	16.50
3131	30.18	PK	H	27.62	6.93	27.43	37.30	74.00	36.70
3131	18.1	AV	H	27.62	6.93	27.43	25.22	54.00	28.78
405.39	32.8	QP	H	16.37	2.44	21.78	29.83	46.00	16.17
Middle Channel: 2437 MHz									
2437	81.07	PK	H	25.74	3.75	0.00	110.56	N/A	N/A
2437	68.04	AV	H	25.74	3.75	0.00	97.53	N/A	N/A
2437	73.92	PK	V	25.74	3.75	0.00	103.41	N/A	N/A
2437	60.9	AV	V	25.74	3.75	0.00	90.39	N/A	N/A
4874	31.07	PK	H	30.77	5.14	27.42	39.56	74.00	34.44
4874	18.81	AV	H	30.77	5.14	27.42	27.30	54.00	26.70
7311	32.4	PK	H	34.35	6.74	25.88	47.61	74.00	26.39
7311	20.14	AV	H	34.35	6.74	25.88	35.35	54.00	18.65
9748	31.77	PK	H	36.80	8.61	27.24	49.94	74.00	24.06
9748	19.52	AV	H	36.80	8.61	27.24	37.69	54.00	16.31
3131	30.13	PK	H	27.62	6.93	27.43	37.25	74.00	36.75
3131	18.04	AV	H	27.62	6.93	27.43	25.16	54.00	28.84
3226	31.53	PK	H	27.92	6.20	27.35	38.30	74.00	35.70
3226	19.36	AV	H	27.92	6.20	27.35	26.13	54.00	27.87
405.39	32.6	QP	H	16.37	2.44	21.78	29.63	46.00	16.37
High Channel: 2462 MHz									
2462	81.72	PK	H	25.80	3.75	0.00	111.27	N/A	N/A
2462	68.81	AV	H	25.80	3.75	0.00	98.36	N/A	N/A
2462	75.63	PK	V	25.80	3.75	0.00	105.18	N/A	N/A
2462	63.19	AV	V	25.80	3.75	0.00	92.74	N/A	N/A
2483.5	34.38	PK	H	25.86	3.67	0.00	63.91	74.00	10.09
2483.5	17.46	AV	H	25.86	3.67	0.00	46.99	54.00	7.01
4924	31.66	PK	H	30.90	5.34	27.43	40.47	74.00	33.53
4924	19.39	AV	H	30.90	5.34	27.43	28.20	54.00	25.80
7386	32.92	PK	H	34.53	6.83	25.86	48.42	74.00	25.58
7386	20.65	AV	H	34.53	6.83	25.86	36.15	54.00	17.85
9848	32.26	PK	H	36.84	8.66	26.94	50.82	74.00	23.18
9848	20.01	AV	H	36.84	8.66	26.94	38.57	54.00	15.43
3131	30.33	PK	H	27.62	6.93	27.43	37.45	74.00	36.55
3131	18.23	AV	H	27.62	6.93	27.43	25.35	54.00	28.65
405.39	33.2	QP	H	16.37	2.44	21.78	30.23	46.00	15.77

802.11 n ht20 Mode


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	80.92	PK	H	25.67	3.68	0.00	110.27	N/A	N/A
2412	67.85	AV	H	25.67	3.68	0.00	97.20	N/A	N/A
2412	74.31	PK	V	25.67	3.68	0.00	103.66	N/A	N/A
2412	60.18	AV	V	25.67	3.68	0.00	89.53	N/A	N/A
2390	28.85	PK	H	25.61	3.63	0.00	58.09	74.00	15.91
2390	14.96	AV	H	25.61	3.63	0.00	44.20	54.00	9.80
4824	32.15	PK	H	30.64	5.03	27.41	40.41	74.00	33.59
4824	19.89	AV	H	30.64	5.03	27.41	28.15	54.00	25.85
7236	32.53	PK	H	34.17	6.65	25.90	47.45	74.00	26.55
7236	20.05	AV	H	34.17	6.65	25.90	34.97	54.00	19.03
9648	33.47	PK	H	36.76	8.55	27.46	51.32	74.00	22.68
9648	21.16	AV	H	36.76	8.55	27.46	39.01	54.00	14.99
3131	31.77	PK	H	27.62	6.93	27.43	38.89	74.00	35.11
3131	19.59	AV	H	27.62	6.93	27.43	26.71	54.00	27.29
405.39	33	QP	H	16.37	2.44	21.78	30.03	46.00	15.97
Middle Channel: 2437 MHz									
2437	79.6	PK	H	25.74	3.75	0.00	109.09	N/A	N/A
2437	66.45	AV	H	25.74	3.75	0.00	95.94	N/A	N/A
2437	74.53	PK	V	25.74	3.75	0.00	104.02	N/A	N/A
2437	61.38	AV	V	25.74	3.75	0.00	90.87	N/A	N/A
4874	31.42	PK	H	30.77	5.14	27.42	39.91	74.00	34.09
4874	19.12	AV	H	30.77	5.14	27.42	27.61	54.00	26.39
7311	32.01	PK	H	34.35	6.74	25.88	47.22	74.00	26.78
7311	19.57	AV	H	34.35	6.74	25.88	34.78	54.00	19.22
9748	32.96	PK	H	36.80	8.61	27.24	51.13	74.00	22.87
9748	20.62	AV	H	36.80	8.61	27.24	38.79	54.00	15.21
3131	31.46	PK	H	27.62	6.93	27.43	38.58	74.00	35.42
3131	19.33	AV	H	27.62	6.93	27.43	26.45	54.00	27.55
3226	32.32	PK	H	27.92	6.20	27.35	39.09	74.00	34.91
3226	20.01	AV	H	27.92	6.20	27.35	26.78	54.00	27.22
405.39	33.1	QP	H	16.37	2.44	21.78	30.13	46.00	15.87
High Channel: 2462 MHz									
2462	80.11	PK	H	25.80	3.75	0.00	109.66	N/A	N/A
2462	67.18	AV	H	25.80	3.75	0.00	96.73	N/A	N/A
2462	73.29	PK	V	25.80	3.75	0.00	102.84	N/A	N/A
2462	60.08	AV	V	25.80	3.75	0.00	89.63	N/A	N/A
2483.5	32.28	PK	H	25.86	3.67	0.00	61.81	74.00	12.19
2483.5	16.54	AV	H	25.86	3.67	0.00	46.07	54.00	7.93
4924	31.81	PK	H	30.90	5.34	27.43	40.62	74.00	33.38
4924	19.47	AV	H	30.90	5.34	27.43	28.28	54.00	25.72
7386	32.28	PK	H	34.53	6.83	25.86	47.78	74.00	26.22
7386	19.85	AV	H	34.53	6.83	25.86	35.35	54.00	18.65
9848	33.19	PK	H	36.84	8.66	26.94	51.75	74.00	22.25
9848	20.88	AV	H	36.84	8.66	26.94	39.44	54.00	14.56
3131	31.58	PK	H	27.62	6.93	27.43	38.70	74.00	35.30
3131	19.45	AV	H	27.62	6.93	27.43	26.57	54.00	27.43
405.39	33.2	QP	H	16.37	2.44	21.78	30.23	46.00	15.77

802.11 n ht40 Mode


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2422 MHz									
2422	77.28	PK	H	25.70	3.71	0.00	106.69	N/A	N/A
2422	62.52	AV	H	25.70	3.71	0.00	91.93	N/A	N/A
2422	71.93	PK	V	25.70	3.71	0.00	101.34	N/A	N/A
2422	59.1	AV	V	25.70	3.71	0.00	88.51	N/A	N/A
2400	37.92	PK	H	25.64	3.65	0.00	67.21	74.00	6.79
2400	19.73	AV	H	25.64	3.65	0.00	49.02	54.00	4.98
4844	30.04	PK	H	30.69	4.99	27.42	38.30	74.00	35.70
4844	17.69	AV	H	30.69	4.99	27.42	25.95	54.00	28.05
7266	31.06	PK	H	34.24	6.68	25.89	46.09	74.00	27.91
7266	18.57	AV	H	34.24	6.68	25.89	33.60	54.00	20.40
9688	32.15	PK	H	36.78	8.58	27.37	50.14	74.00	23.86
9688	19.72	AV	H	36.78	8.58	27.37	37.71	54.00	16.29
3131	30.98	PK	H	27.62	6.93	27.43	38.10	74.00	35.90
3131	18.97	AV	H	27.62	6.93	27.43	26.09	54.00	27.91
405.39	32.8	QP	H	16.37	2.44	21.78	29.83	46.00	16.17
Middle Channel: 2437 MHz									
2437	77.74	PK	H	25.74	3.75	0.00	107.23	N/A	N/A
2437	64.04	AV	H	25.74	3.75	0.00	93.53	N/A	N/A
2437	71.5	PK	V	25.74	3.75	0.00	100.99	N/A	N/A
2437	58.74	AV	V	25.74	3.75	0.00	88.23	N/A	N/A
4874	30.45	PK	H	30.77	5.14	27.42	38.94	74.00	35.06
4874	18.15	AV	H	30.77	5.14	27.42	26.64	54.00	27.36
7311	31.39	PK	H	34.35	6.74	25.88	46.60	74.00	27.40
7311	18.88	AV	H	34.35	6.74	25.88	34.09	54.00	19.91
9748	32.34	PK	H	36.80	8.61	27.24	50.51	74.00	23.49
9748	20.02	AV	H	36.80	8.61	27.24	38.19	54.00	15.81
3131	31.09	PK	H	27.62	6.93	27.43	38.21	74.00	35.79
3131	18.95	AV	H	27.62	6.93	27.43	26.07	54.00	27.93
3226	31.92	PK	H	27.92	6.20	27.35	38.69	74.00	35.31
3226	19.63	AV	H	27.92	6.20	27.35	26.40	54.00	27.60
405.39	32.6	QP	H	16.37	2.44	21.78	29.63	46.00	16.37
High Channel: 2452 MHz									
2452	77.58	PK	H	25.78	3.78	0.00	107.14	N/A	N/A
2452	63.9	AV	H	25.78	3.78	0.00	93.46	N/A	N/A
2452	70.59	PK	V	25.78	3.78	0.00	100.15	N/A	N/A
2452	57.92	AV	V	25.78	3.78	0.00	87.48	N/A	N/A
2483.5	43.1	PK	H	25.86	3.67	0.00	72.63	74.00	1.37
2483.5	22.75	AV	H	25.86	3.67	0.00	52.28	54.00	1.72
4904	30.26	PK	H	30.85	5.31	27.43	38.99	74.00	35.01
4904	17.87	AV	H	30.85	5.31	27.43	26.60	54.00	27.40
7356	31.26	PK	H	34.45	6.79	25.87	46.63	74.00	27.37
7356	18.74	AV	H	34.45	6.79	25.87	34.11	54.00	19.89
9808	32.26	PK	H	36.82	8.64	27.09	50.63	74.00	23.37
9808	19.94	AV	H	36.82	8.64	27.09	38.31	54.00	15.69
3131	31.06	PK	H	27.62	6.93	27.43	38.18	74.00	35.82
3131	18.94	AV	H	27.62	6.93	27.43	26.06	54.00	27.94
405.39	32.8	QP	H	16.37	2.44	21.78	29.83	46.00	16.17

**Conducted Spurious Emissions at Antenna Port**


**Chain 0, 802.11b Low Channel**

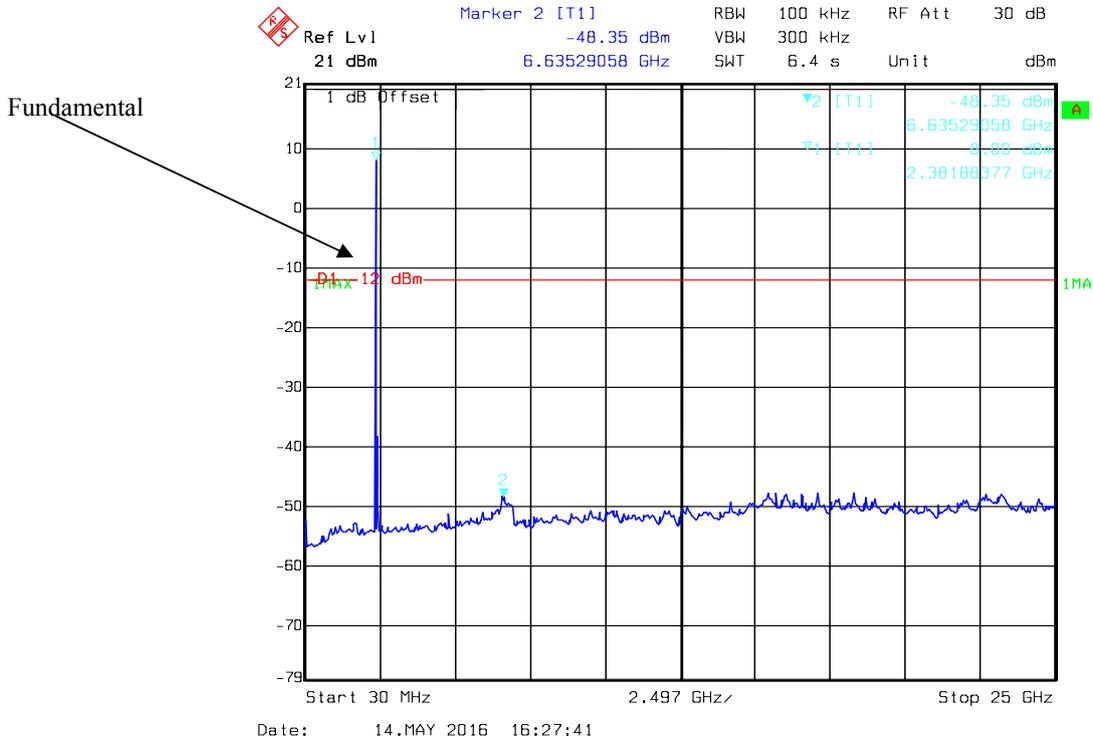


**Chain 0, 802.11b Middle Channel**

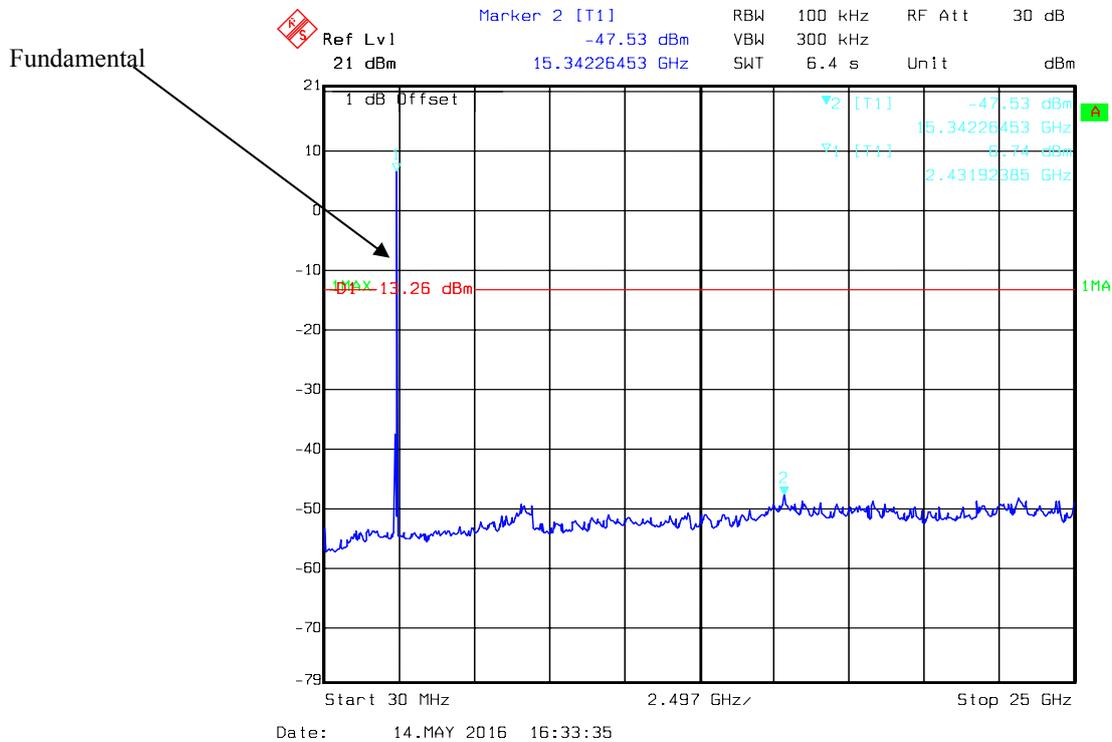


### Chain 0, 802.11b High Channel

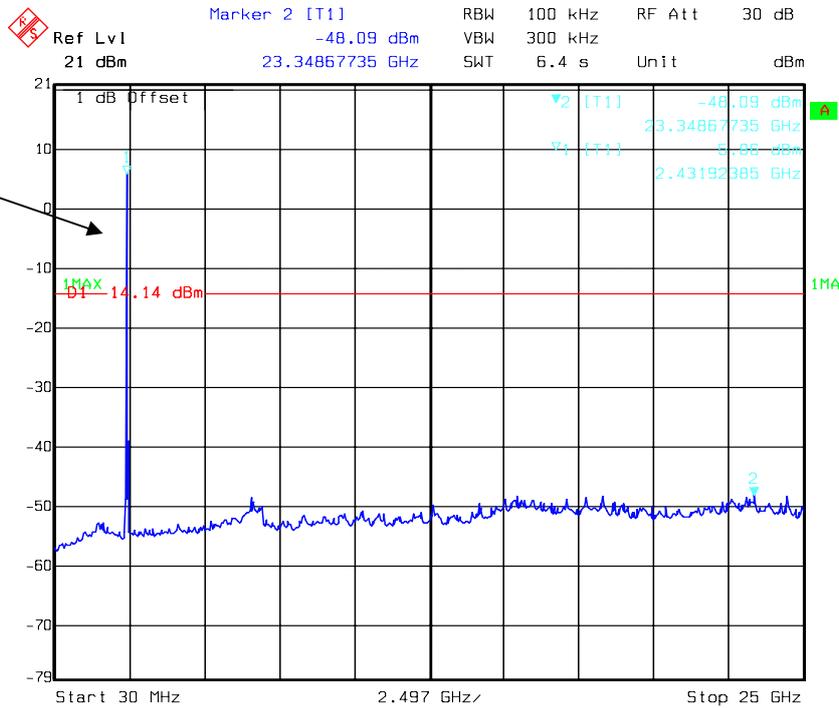


### Chain 0, 802.11g Low Channel

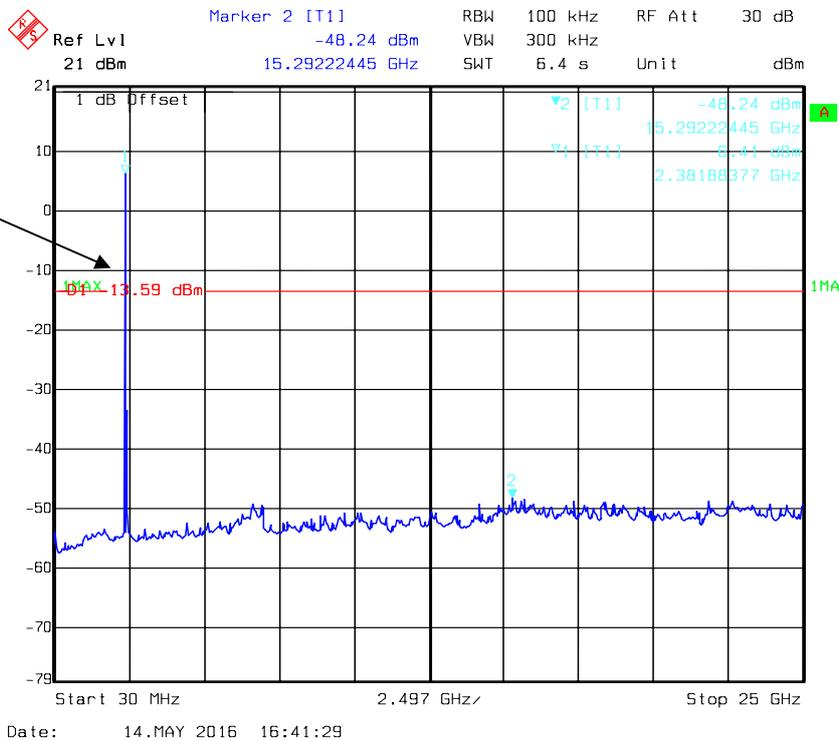


### Chain 0, 802.11g Middle Channel

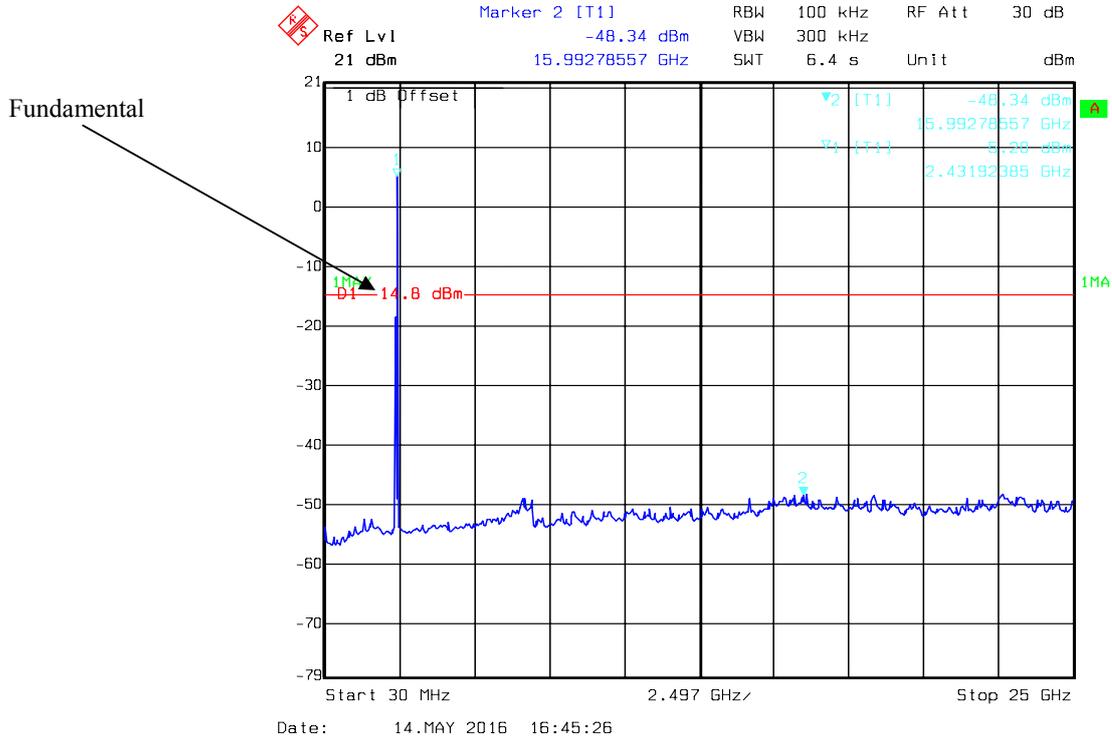


### Chain 0, 802.11g High Channel

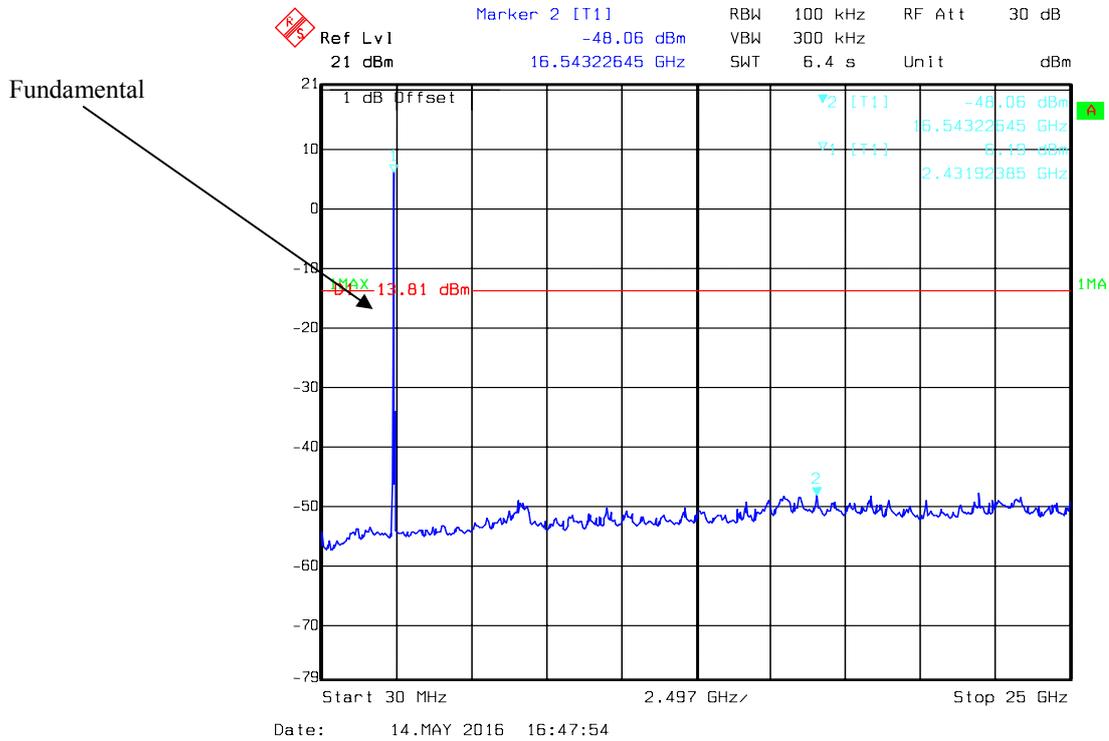


**Chain 0, 802.11n ht20 Low Channel**

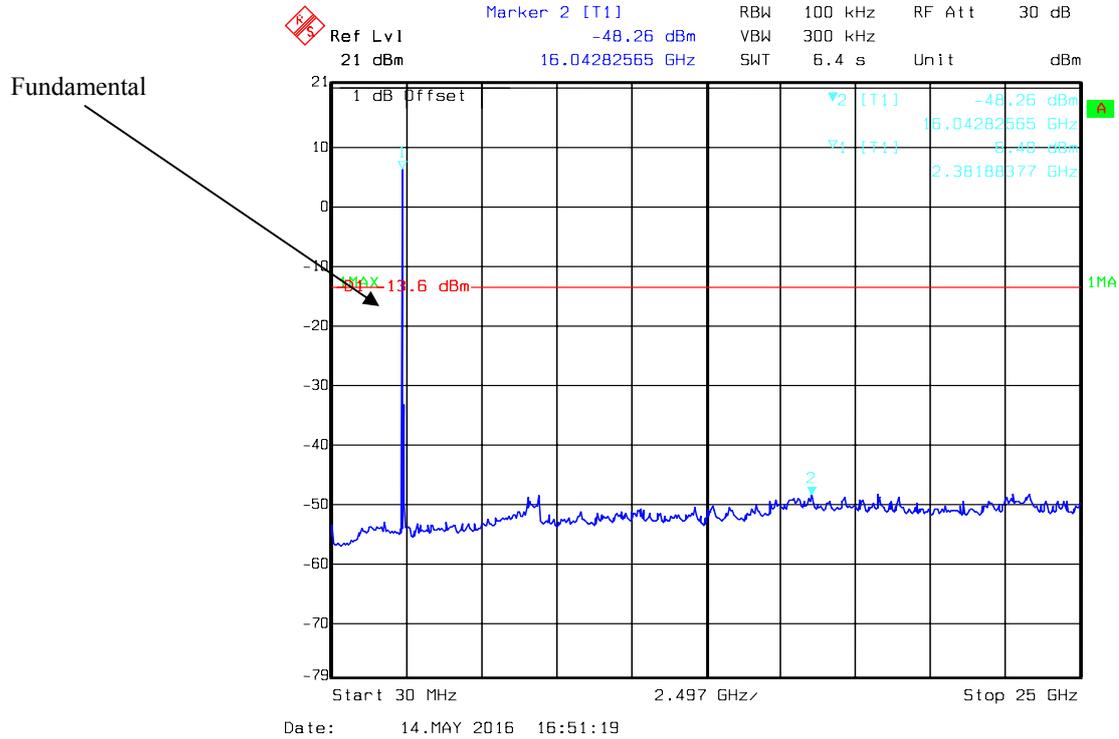


**Chain 0, 802.11n ht20 Middle Channel**

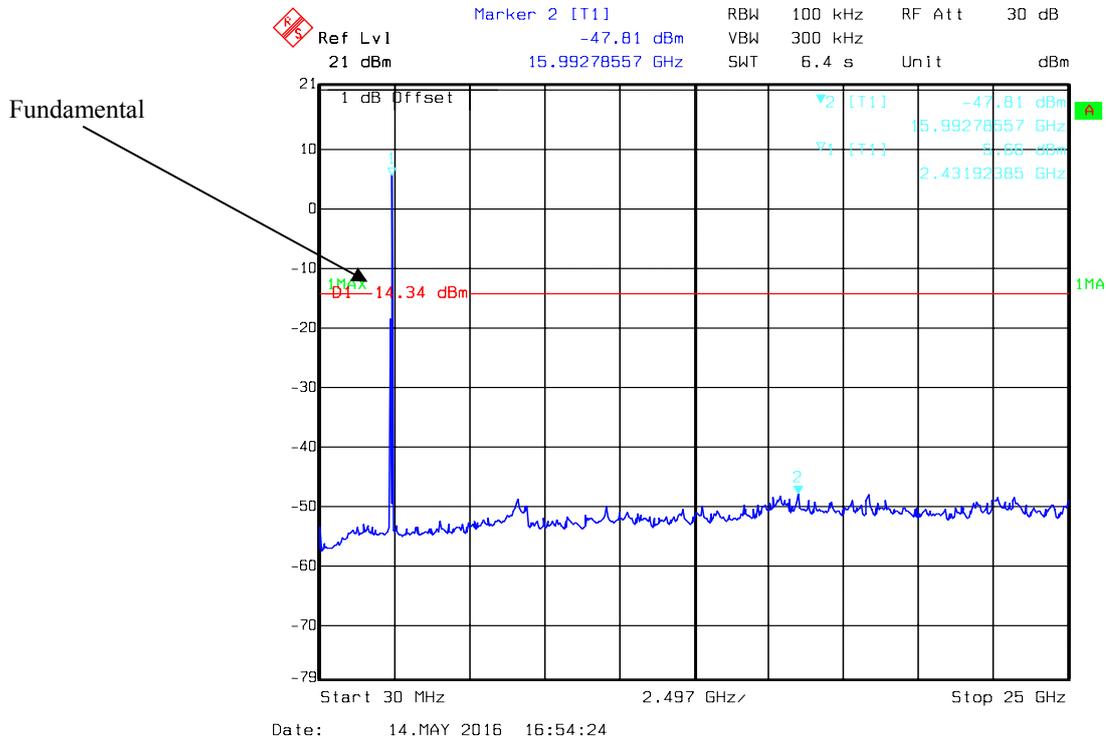


**Chain 0, 802.11n ht20 High Channel**

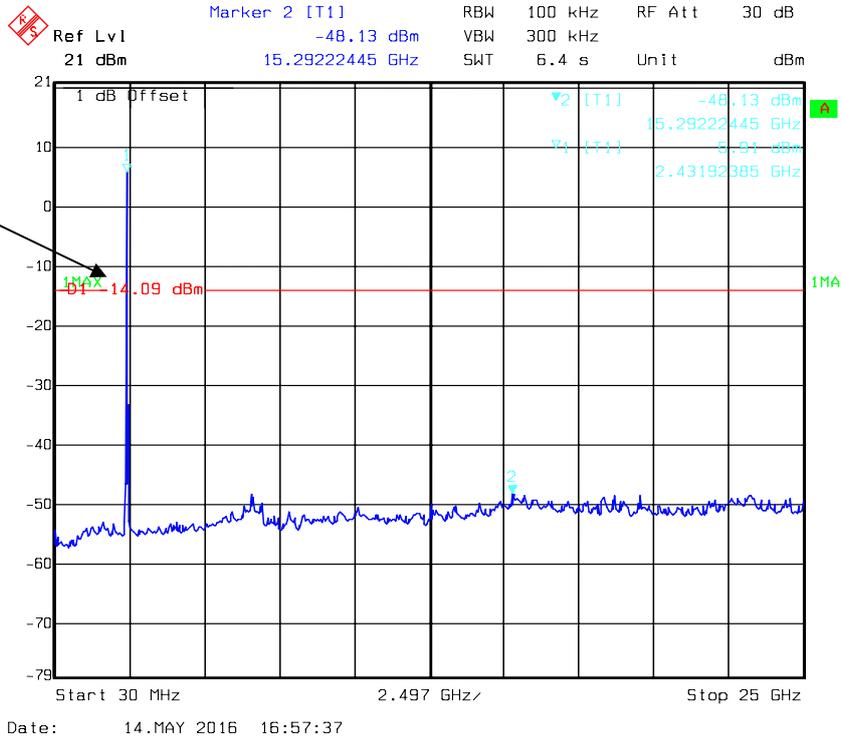


**Chain 0, 802.11n ht40 Low Channel**

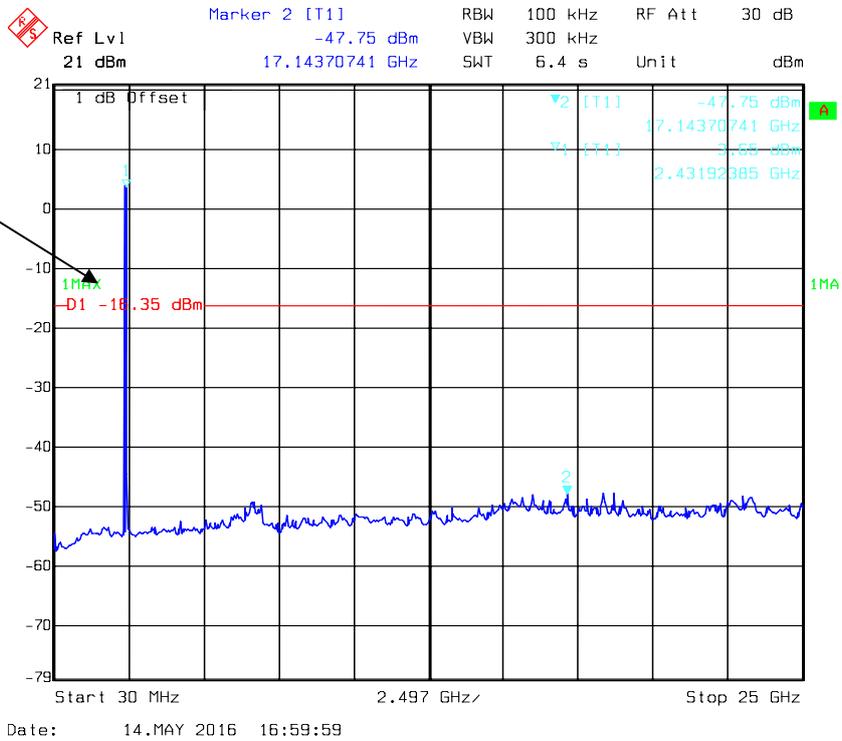


**Chain 0, 802.11n ht40 Middle Channel**

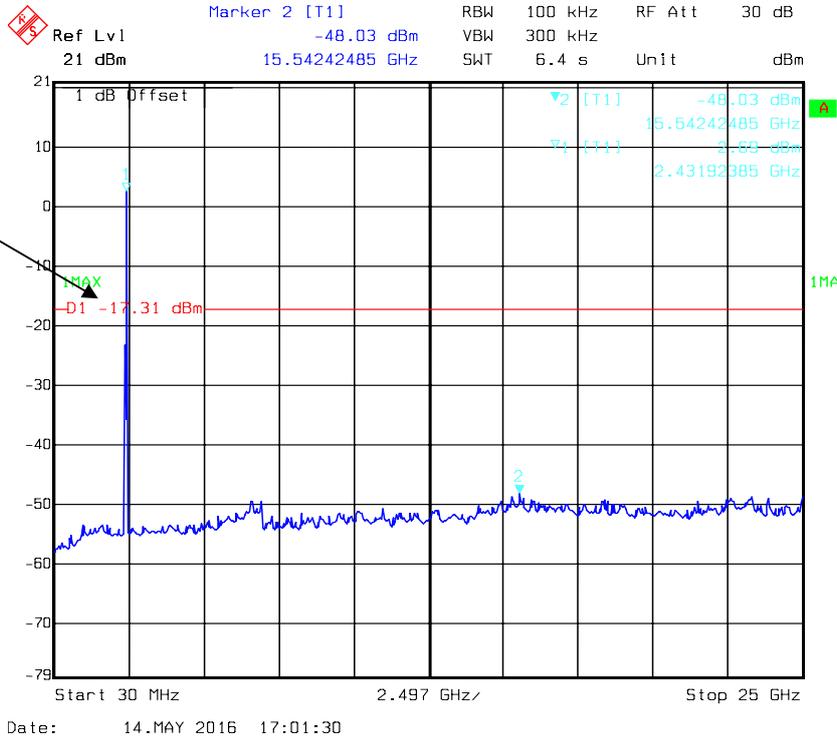


**Chain 0, 802.11n ht40 High Channel**

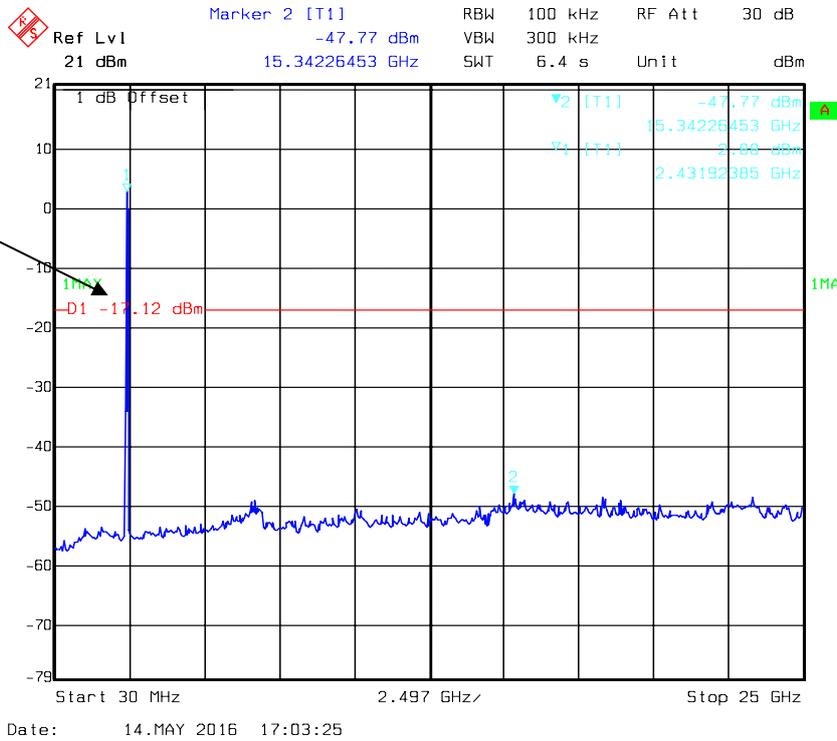


**Chain 1, 802.11b Low Channel**

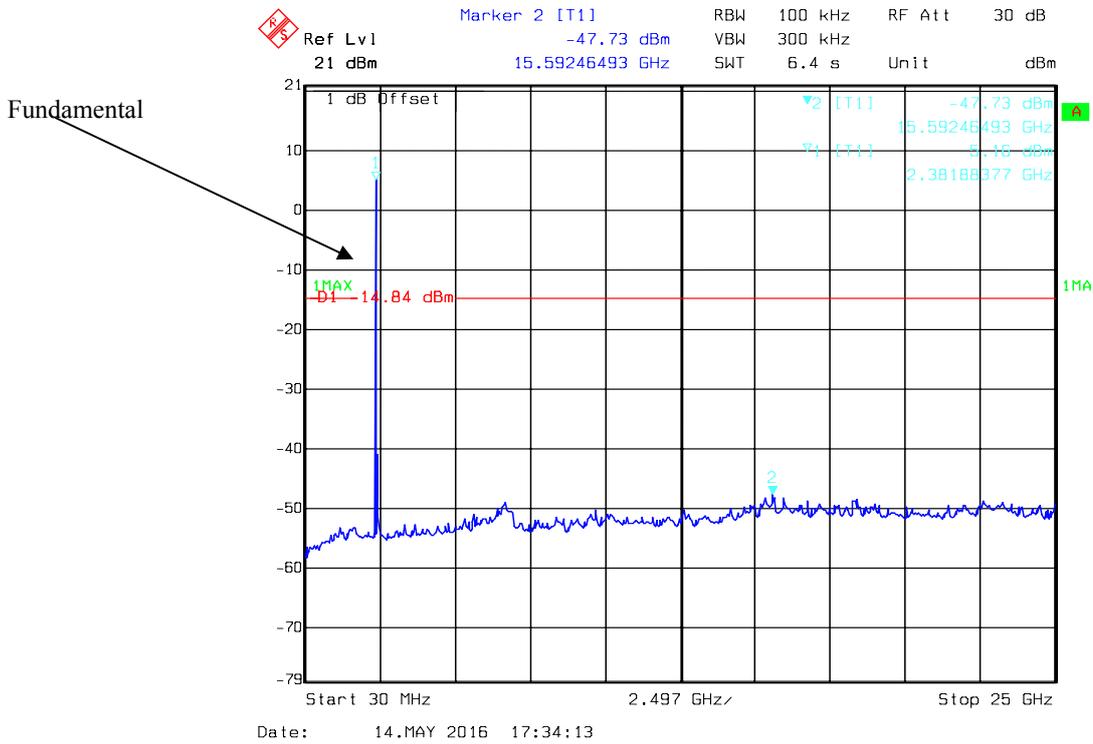


**Chain 1, 802.11b Middle Channel**

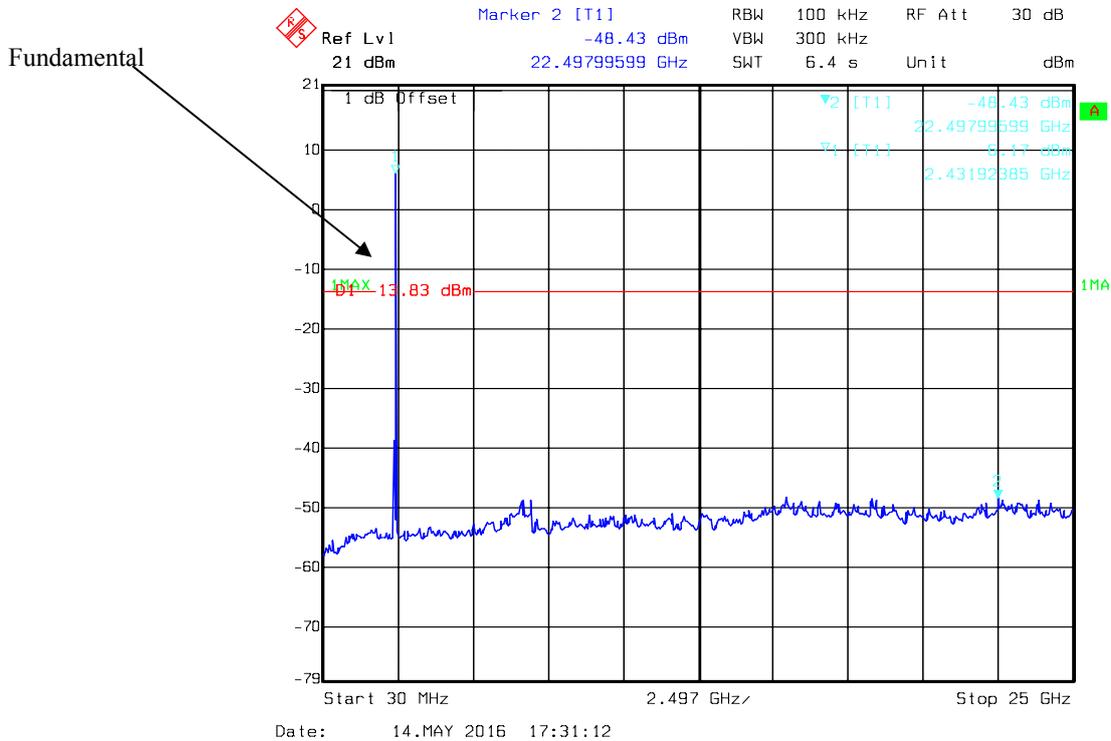

### Chain 1, 802.11b High Channel

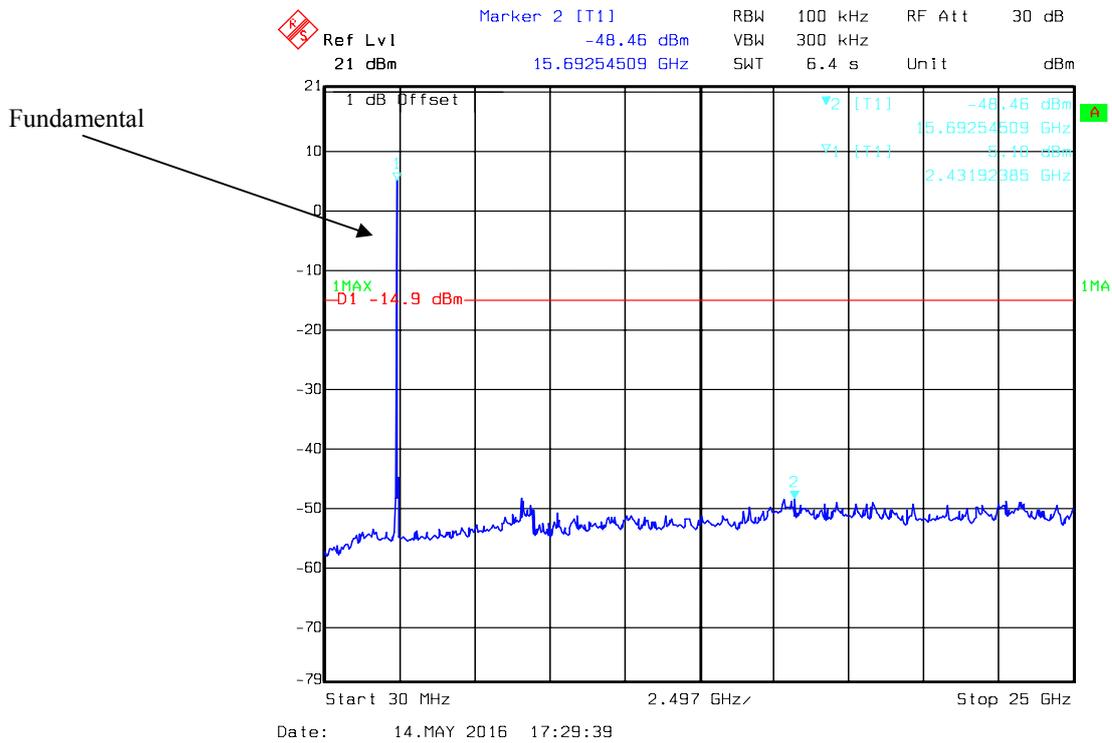


### Chain 1, 802.11g Low Channel

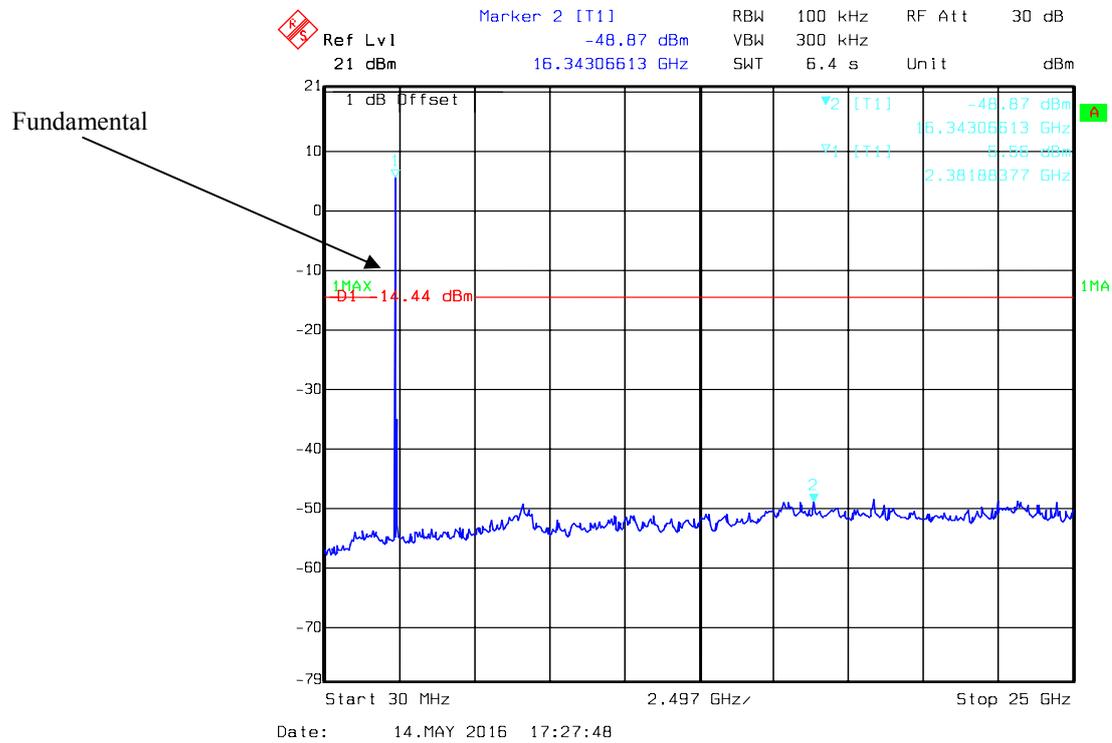





### Chain 1, 802.11n ht20 Low Channel

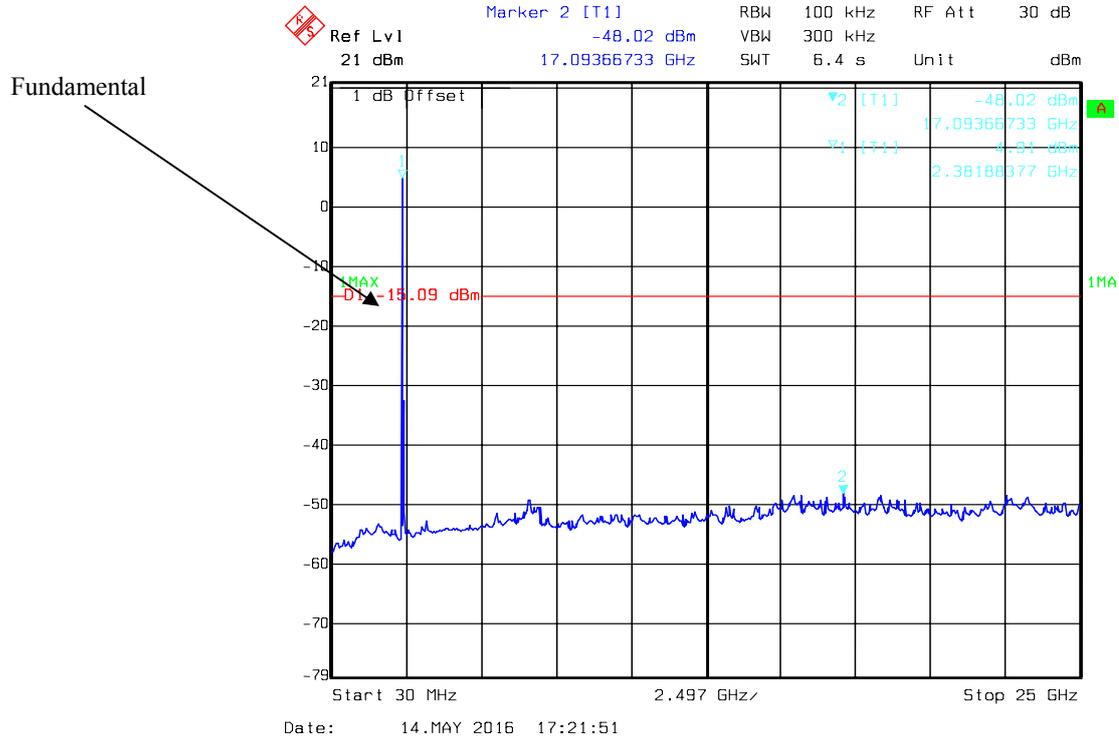

### Chain 1, 802.11n ht20 Middle Channel

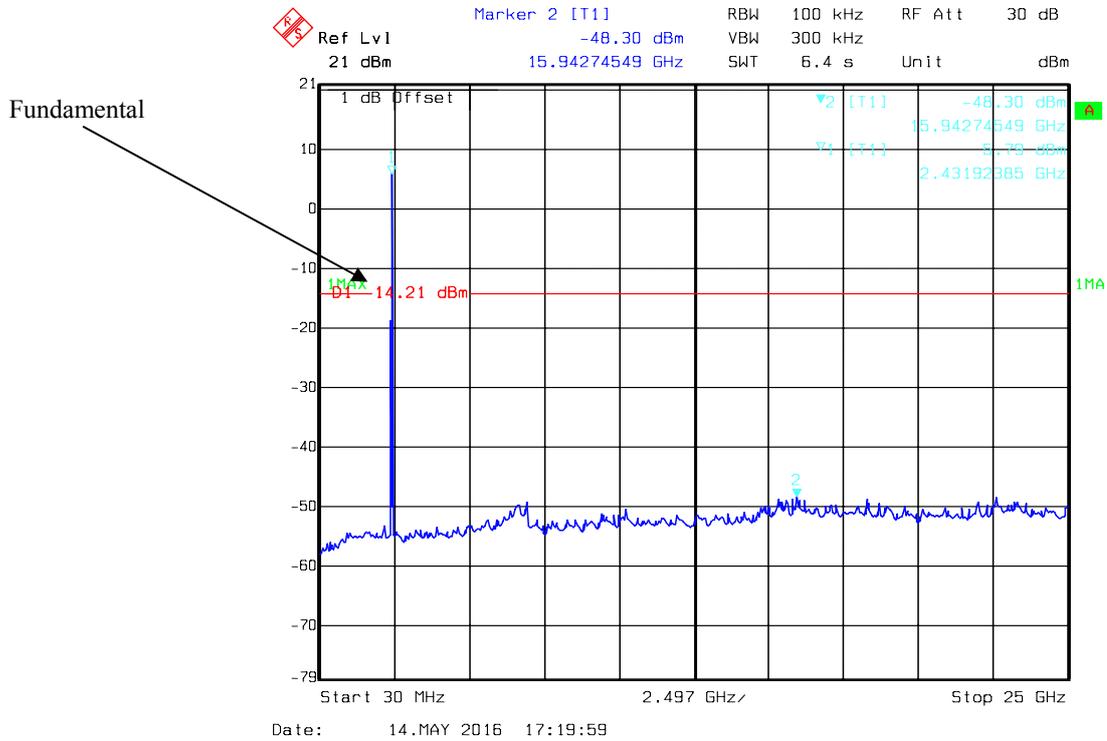


### Chain 1, 802.11n ht20 High Channel

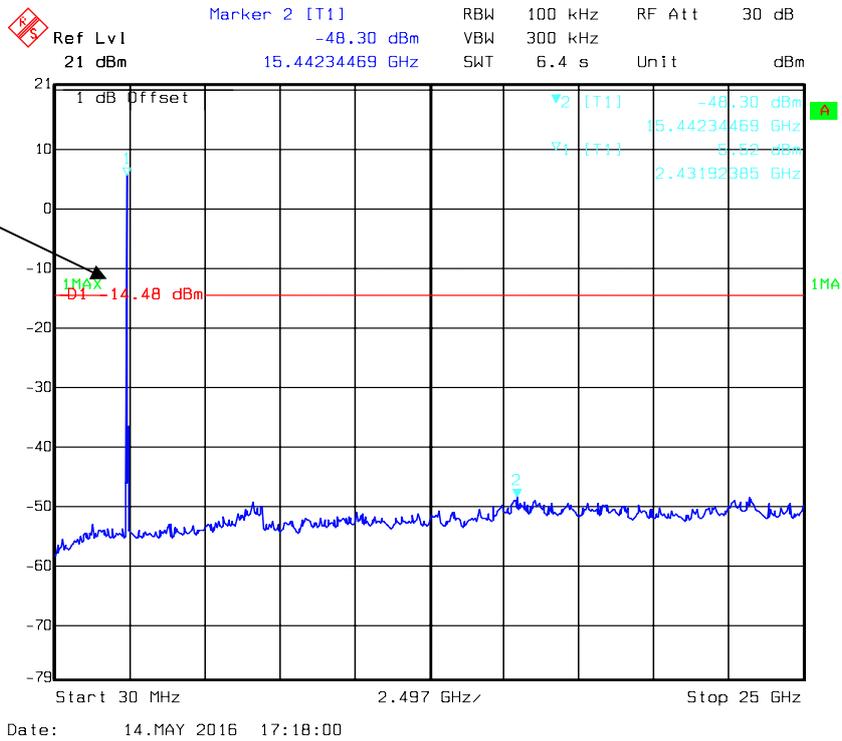


Fundamental

### Chain 1, 802.11n ht40 Low Channel

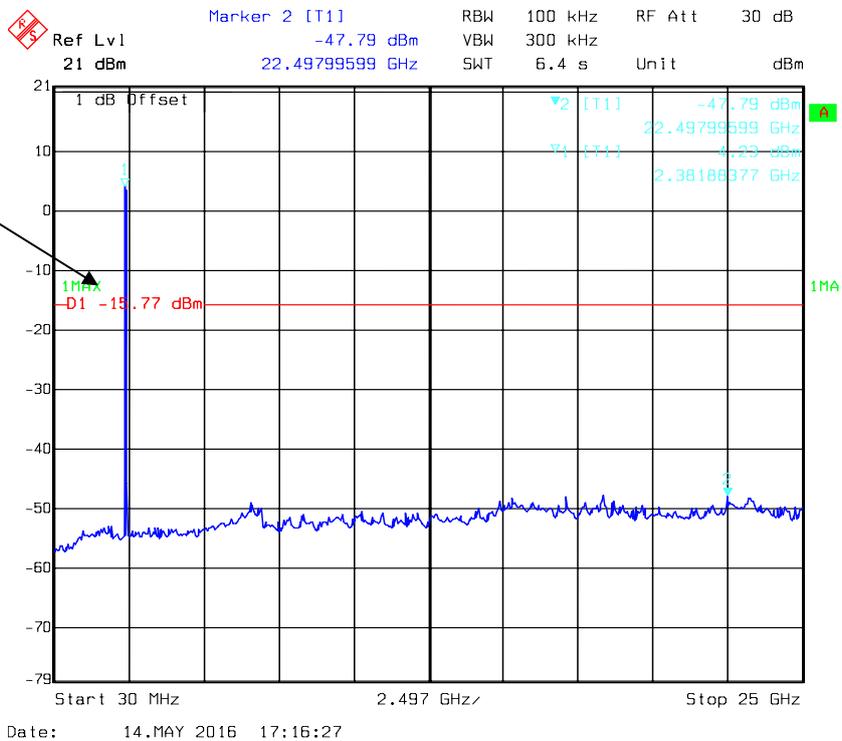


Fundamental

### Chain 1, 802.11n ht40 Middle Channel

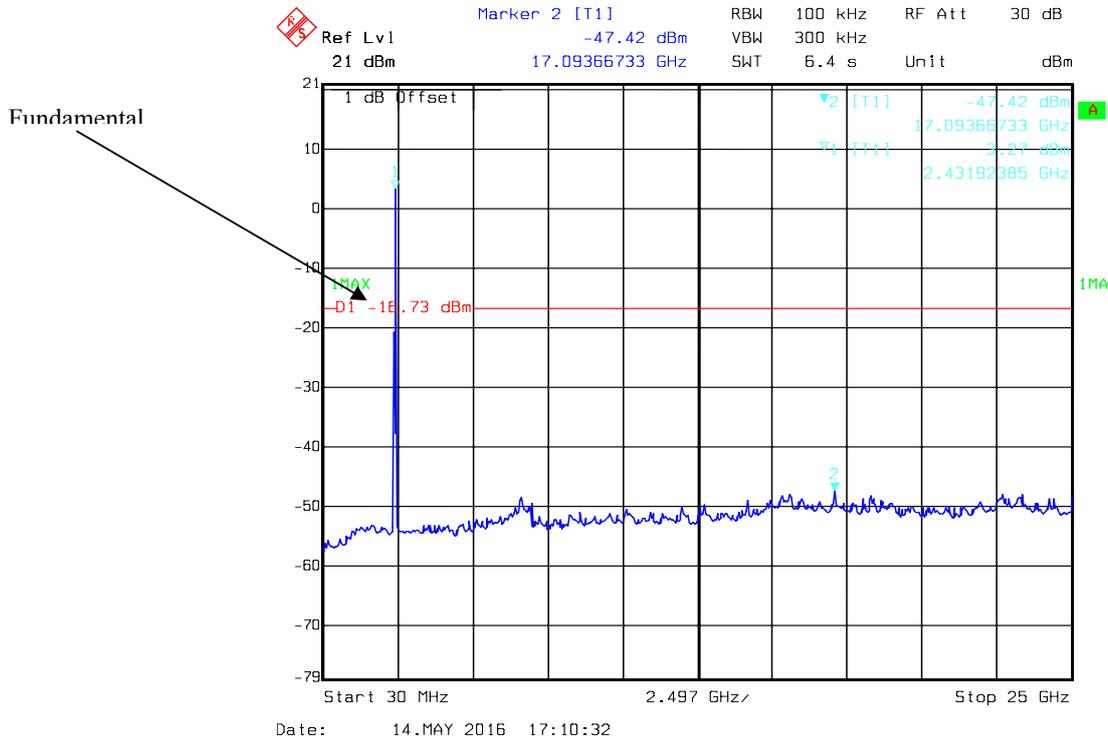

### Chain 1, 802.11n ht40 High Channel

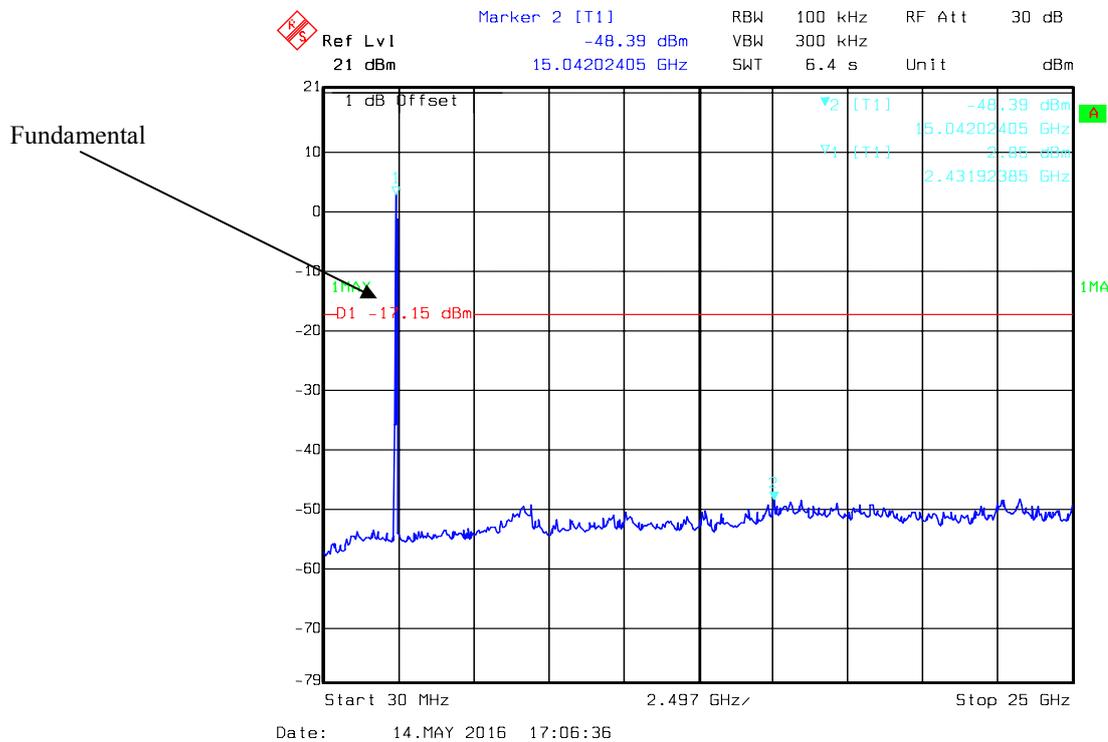


## FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	29.1°C
Relative Humidity:	68 %
ATM Pressure:	100.3kPa


\* The testing was performed by Dean Liu on 2016-05-05.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.


Test mode	Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)		Limit (MHz)
			Chain 0	Chain 1	
802.11b	Low	2412	9.04	8.96	$\geq 0.5$
	Middle	2437	9.04	9.52	$\geq 0.5$
	High	2462	10.16	10.16	$\geq 0.5$
802.11g	Low	2412	16.56	16.56	$\geq 0.5$
	Middle	2437	16.56	16.56	$\geq 0.5$
	High	2462	16.56	16.56	$\geq 0.5$
802.11n20	Low	2412	17.76	17.84	$\geq 0.5$
	Middle	2437	17.76	17.76	$\geq 0.5$
	High	2462	17.76	17.76	$\geq 0.5$
802.11 n40	Low	2422	36.16	36.48	$\geq 0.5$
	Middle	2437	36.48	36.48	$\geq 0.5$
	High	2452	36.48	36.48	$\geq 0.5$

Chain 0, 802.11b Low Channel

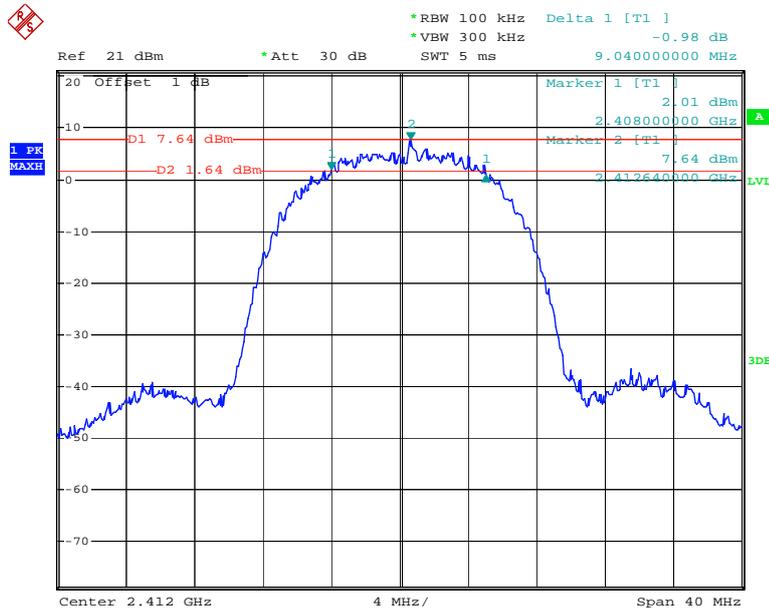


Date: 5.MAY.2016 14:04:46

### Chain 0, 802.11b Middle Channel

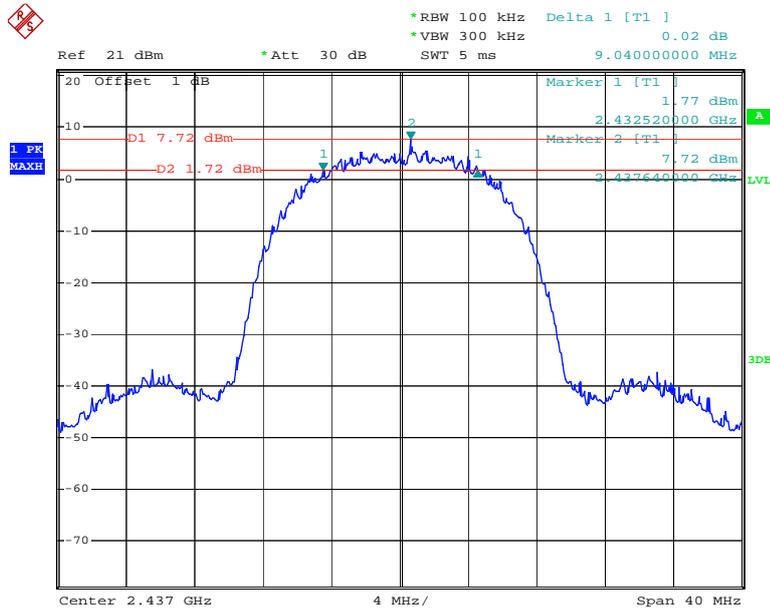


Date: 5.MAY.2016 14:45:04

### Chain 0, 802.11b High Channel

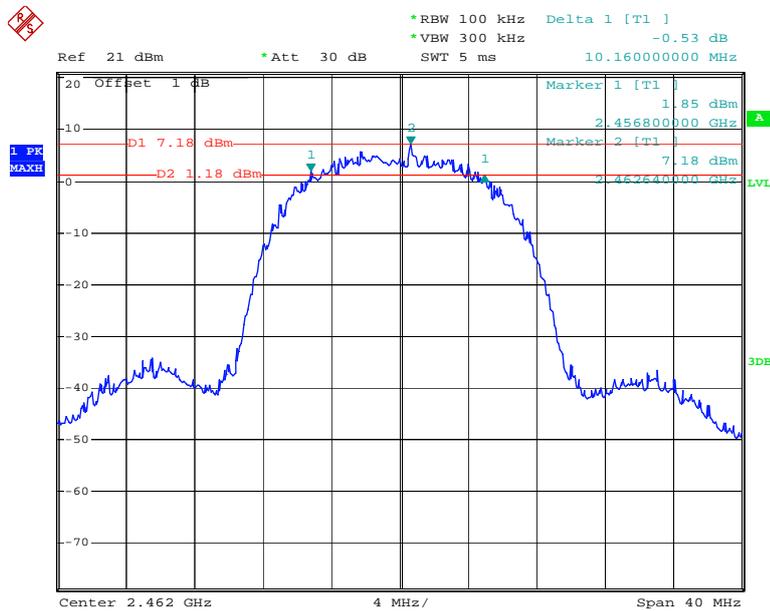


Date: 5.MAY.2016 14:49:02

### Chain 0, 802.11g Low Channel

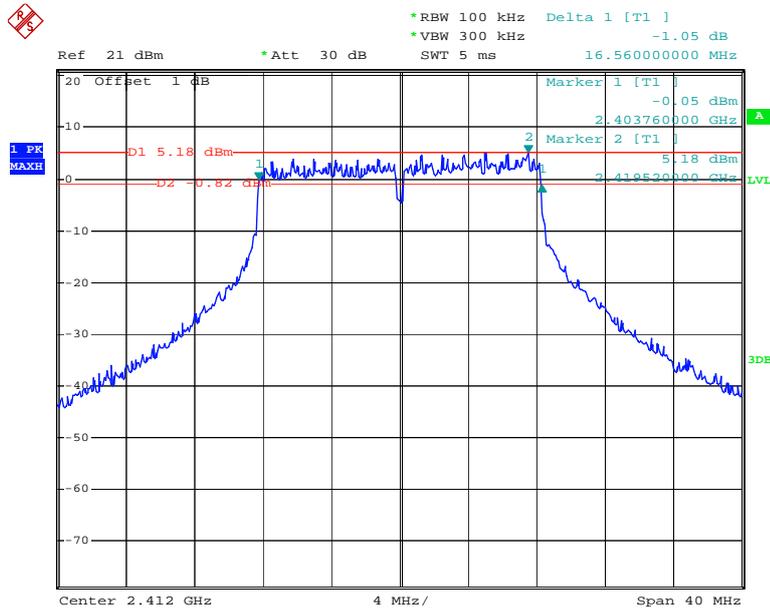


Date: 5.MAY.2016 14:55:06

### Chain 0, 802.11g Middle Channel

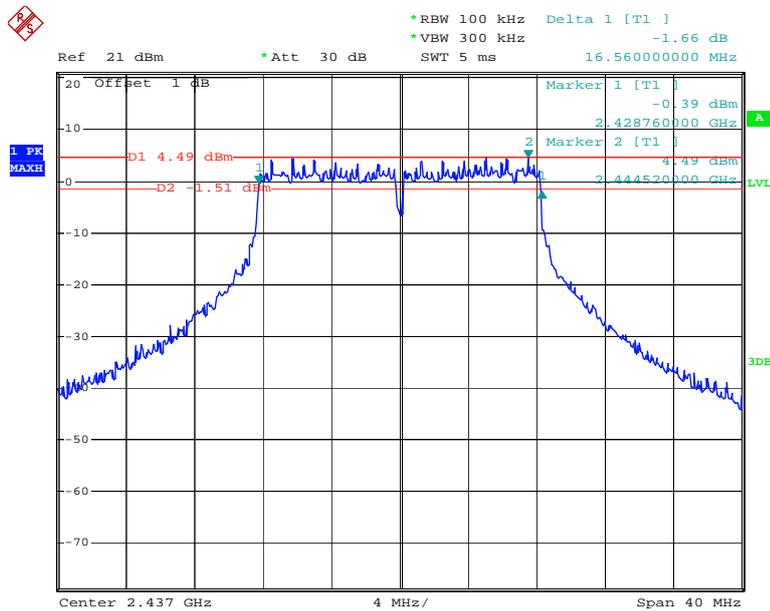


Date: 5.MAY.2016 14:58:56

### Chain 0, 802.11g High Channel

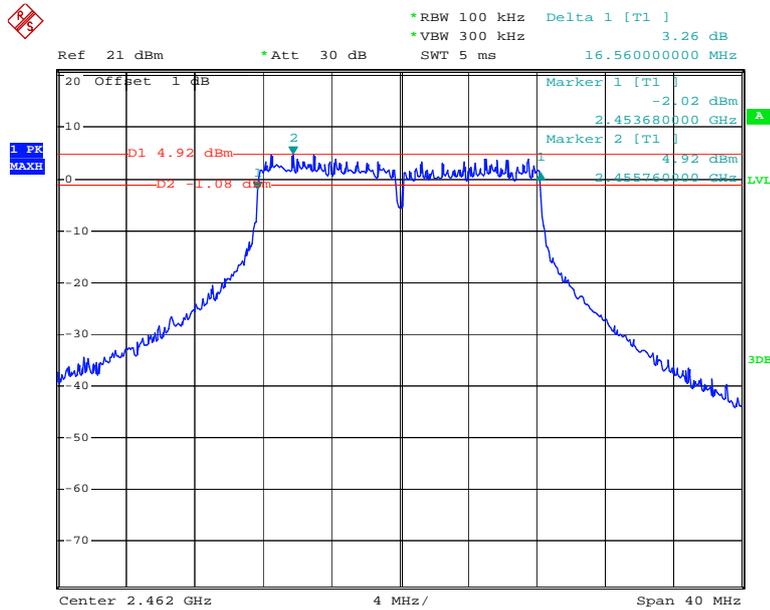


Date: 5.MAY.2016 15:23:43

### Chain 0, 802.11n ht20 Low Channel

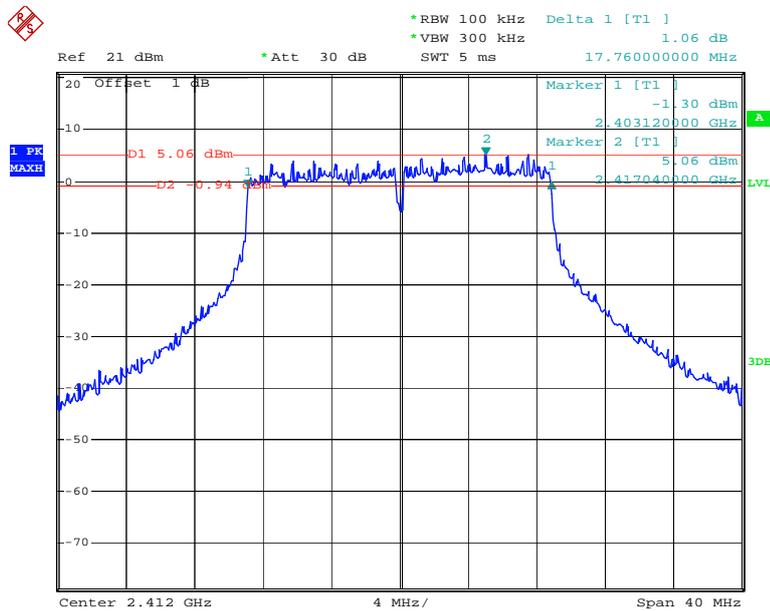


Date: 5.MAY.2016 15:27:51

**Chain 0, 802.11n ht20 Middle Channel**

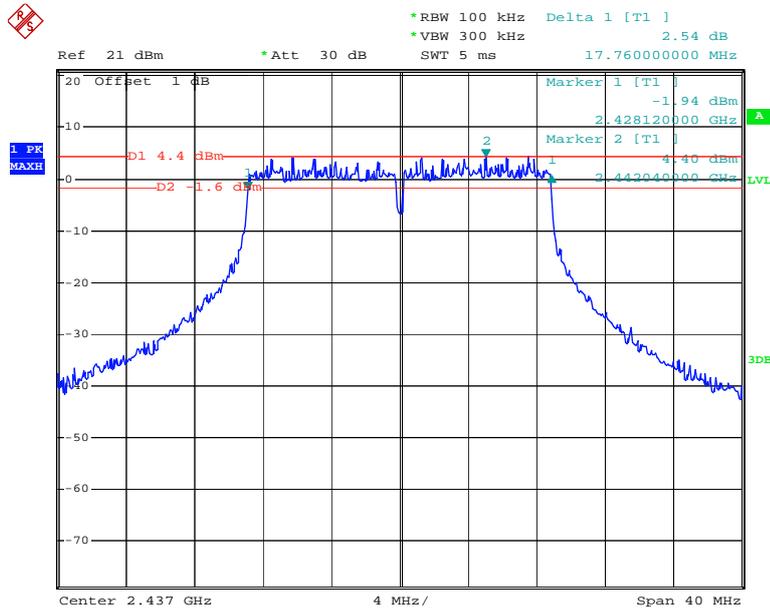


Date: 5.MAY.2016 15:32:48

**Chain 0, 802.11n ht20 High Channel**

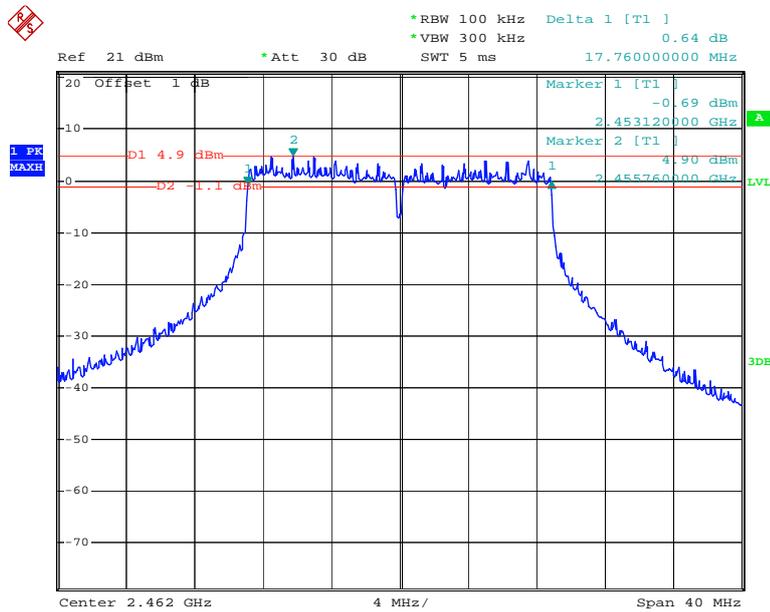


Date: 5.MAY.2016 15:38:14

**Chain 0, 802.11n ht40 Low Channel**

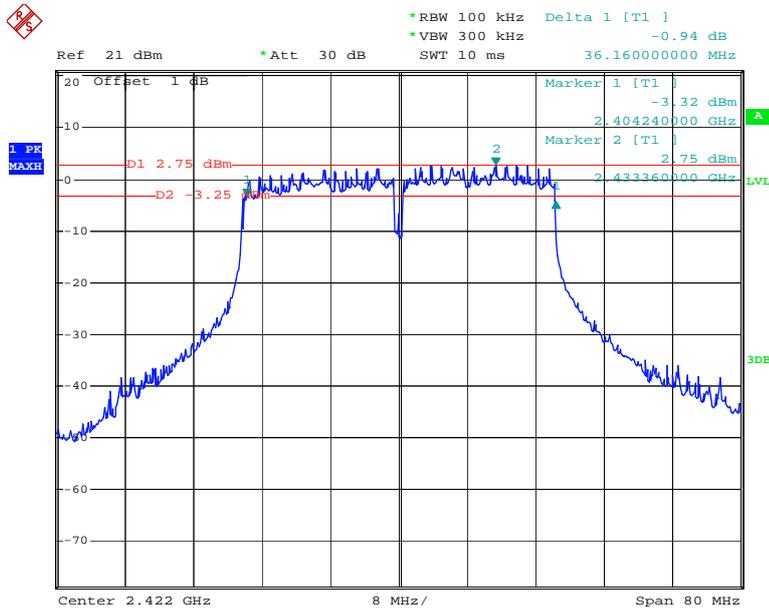


Date: 5.MAY.2016 15:44:32

**Chain 0, 802.11n ht40 Middle Channel**

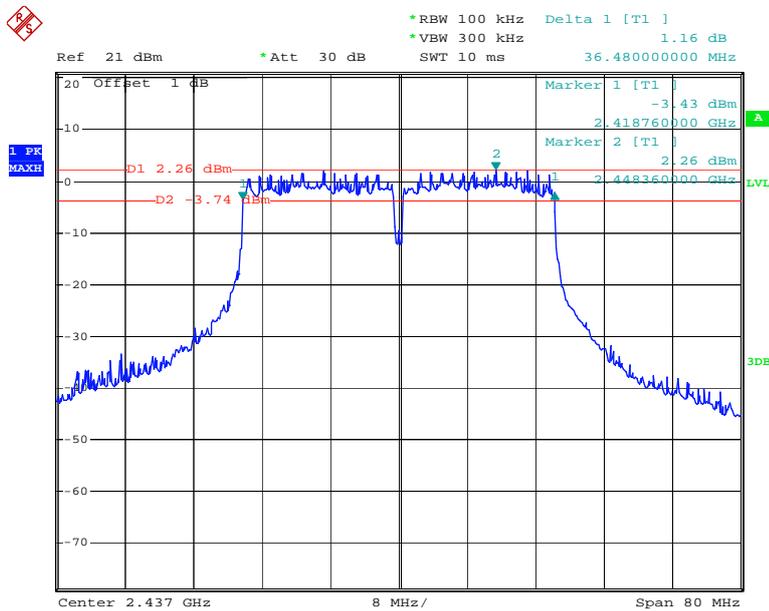


Date: 5.MAY.2016 15:50:04

### Chain 0, 802.11n ht40 High Channel

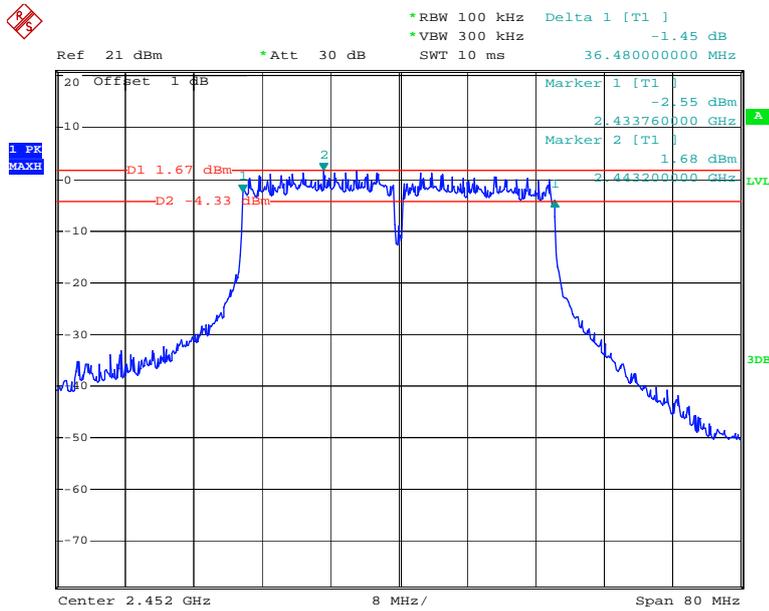

Date: 5.MAY.2016 15:53:35


### Chain 1, 802.11b Low Channel

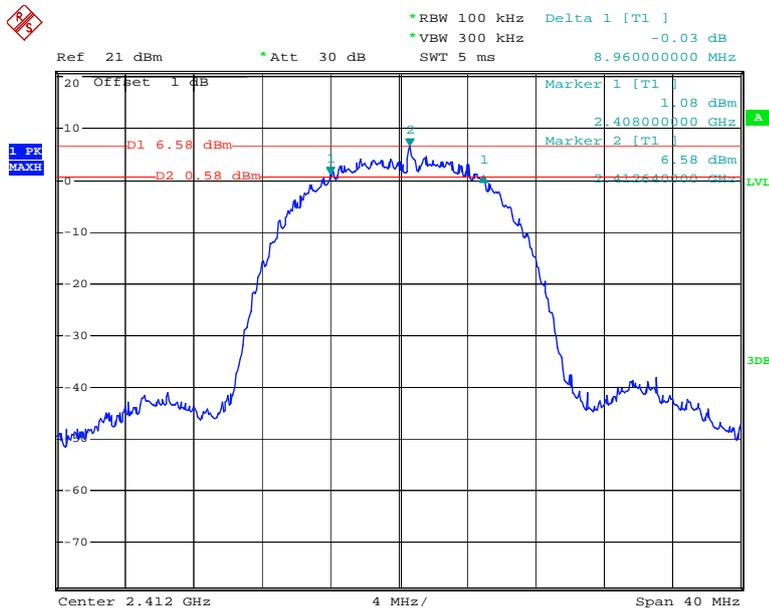

Date: 5.MAY.2016 20:25:07




### Chain 1, 802.11g Low Channel

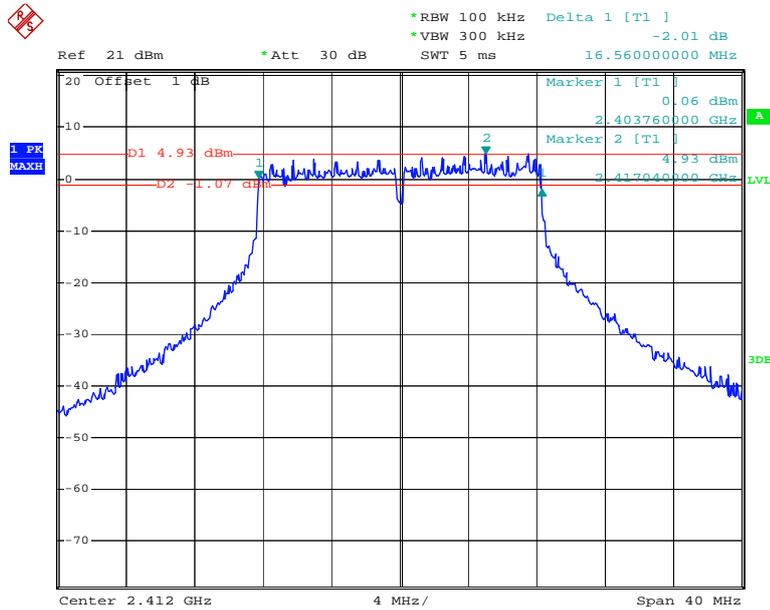


Date: 5.MAY.2016 20:06:41

### Chain 1, 802.11g Middle Channel

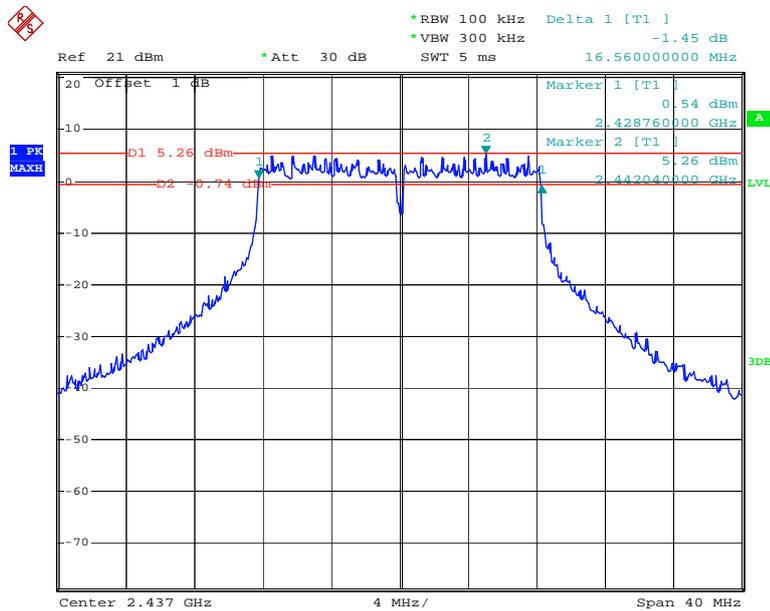


Date: 5.MAY.2016 20:00:47

### Chain 1, 802.11g High Channel

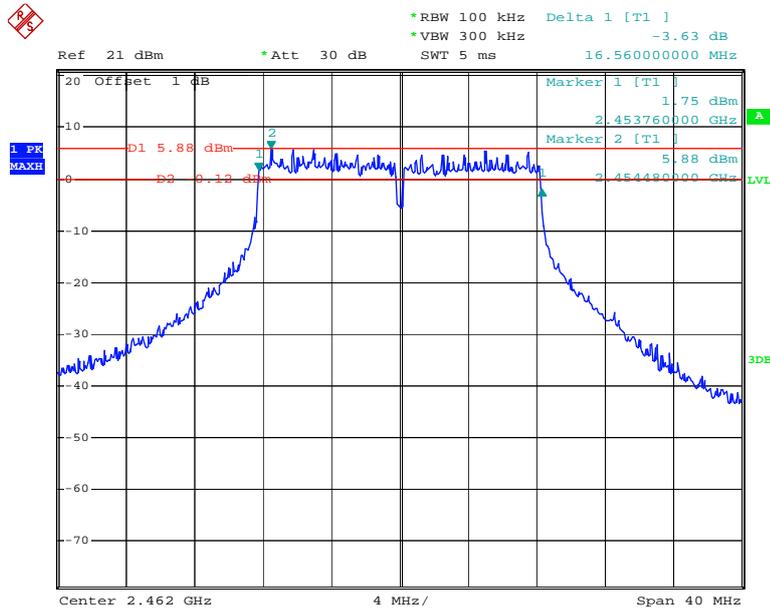


Date: 5.MAY.2016 19:50:09

### Chain 1, 802.11n ht20 Low Channel

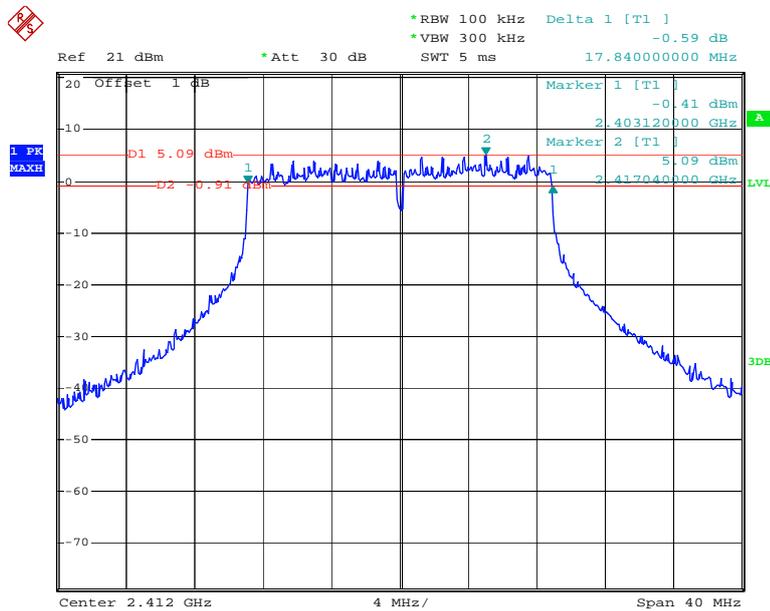


Date: 5.MAY.2016 19:41:48

**Chain 1, 802.11n ht20 Middle Channel**

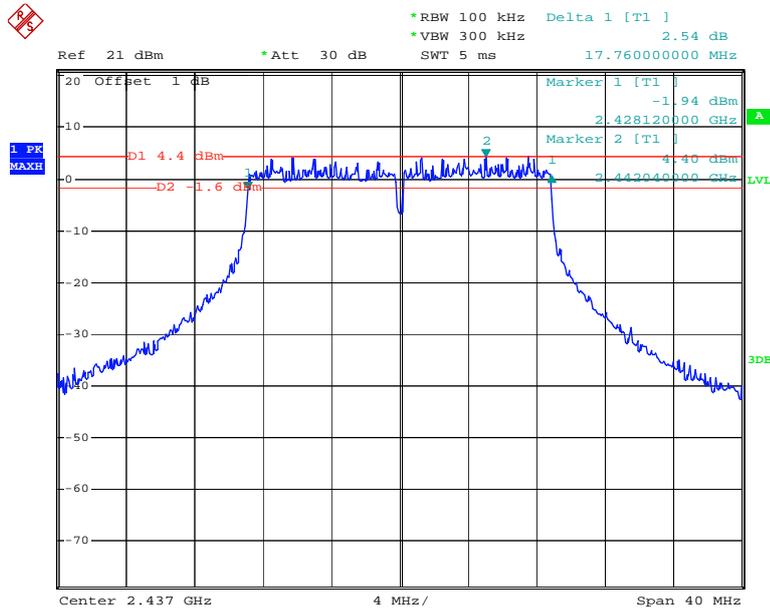


Date: 5.MAY.2016 15:32:48

**Chain 1, 802.11n ht20 High Channel**

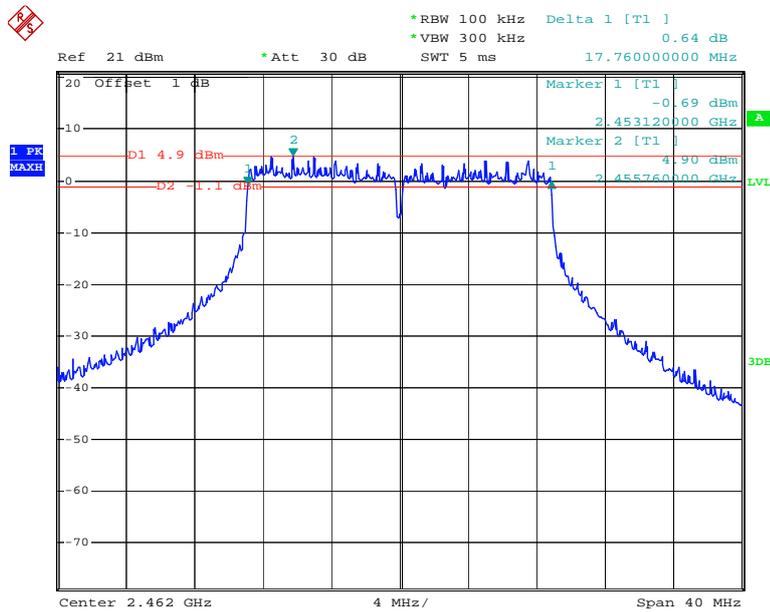


Date: 5.MAY.2016 15:38:14

**Chain 1, 802.11n ht40 Low Channel**

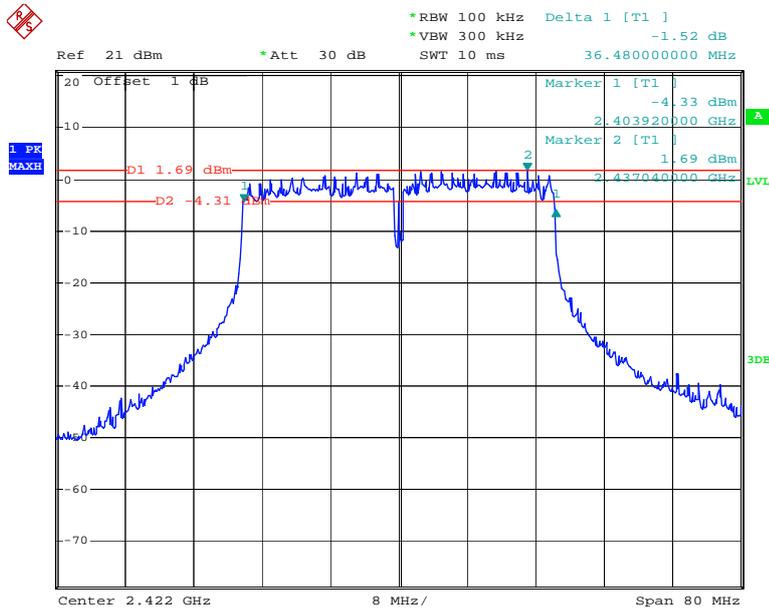


Date: 5.MAY.2016 16:06:17

**Chain 1, 802.11n ht40 Middle Channel**

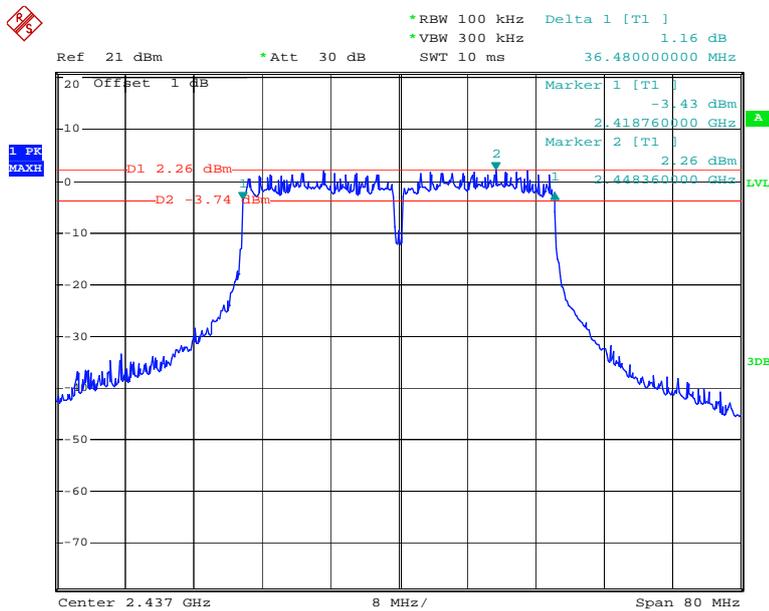

Date: 5.MAY.2016 15:50:04

### Chain 1, 802.11n ht40 High Channel

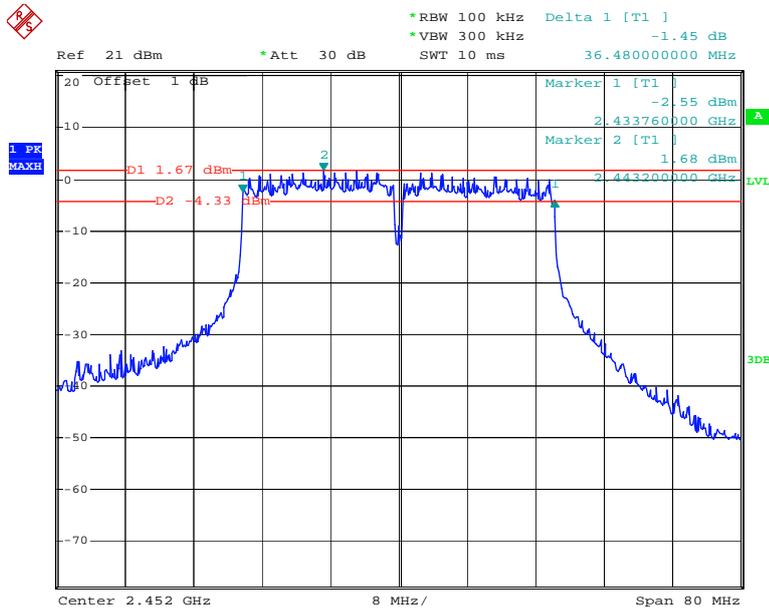

Date: 5.MAY.2016 15:53:35


## FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2015-11-03	2016-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2015-11-03	2016-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2015-11-03	2016-11-03
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	29.1 °C
<b>Relative Humidity:</b>	68 %
<b>ATM Pressure:</b>	100.3kPa

\* The testing was performed by Dean Liu on 2016-05-05.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Test mode	Channel	Frequency	Max Peak Conducted Output Power (dBm)		Total	Limit
		(MHz)	Chain 0	Chain 1	(dBm)	(dBm)
802.11b	Low	2412	17.33	16.97	20.16	30
	Middle	2437	16.95	16.91	19.94	30
	High	2462	17.04	16.97	20.02	30
802.11g	Low	2412	19.71	19.01	22.38	30
	Middle	2437	19.21	19.09	22.16	30
	High	2462	19.22	19.19	22.22	30
802.11n20	Low	2412	19.45	19.57	22.52	30
	Middle	2437	19.16	19.48	22.33	30
	High	2462	19.15	19.16	22.17	30
802.11n40	Low	2422	21.00	20.01	23.54	30
	Middle	2437	20.61	20.21	23.42	30
	High	2452	19.96	19.69	22.84	30

Test mode	Channel	Frequency	Average Conducted Output Power (dBm)		Total	Limit
		(MHz)	Chain 0	Chain 1	(dBm)	(dBm)
802.11b	Low	2412	16.39	16.03	19.22	30
	Middle	2437	15.98	16.04	19.02	30
	High	2462	16.09	16.13	19.12	30
802.11g	Low	2412	16.12	16.15	19.15	30
	Middle	2437	15.90	16.15	19.04	30
	High	2462	16.03	16.05	19.05	30
802.11n20	Low	2412	16.17	16.31	19.25	30
	Middle	2437	16.10	16.01	19.07	30
	High	2462	16.04	15.88	18.97	30
802.11n40	Low	2422	16.24	16.11	19.19	30
	Middle	2437	16.24	16.03	19.15	30
	High	2452	16.18	15.96	19.08	30

Note: both antenna maximum antenna gains are 5dBi, and employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for  $NANT \leq 4$ ;

So:

Directional gain = GANT + Array Gain = 5dBi

The power limit no need reduce.

## **FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**

### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### **Test Equipment List and Details**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

#### **Environmental Conditions**


<b>Temperature:</b>	29.1 °C
<b>Relative Humidity:</b>	68 %
<b>ATM Pressure:</b>	100.3kPa

\* The testing was performed by Dean Liu on 2016-05-05.

Test mode: Transmitting


Test Result: Compliant. Please refer to following plots.

**Chain 0, 802.11b: Band Edge, Left Side**

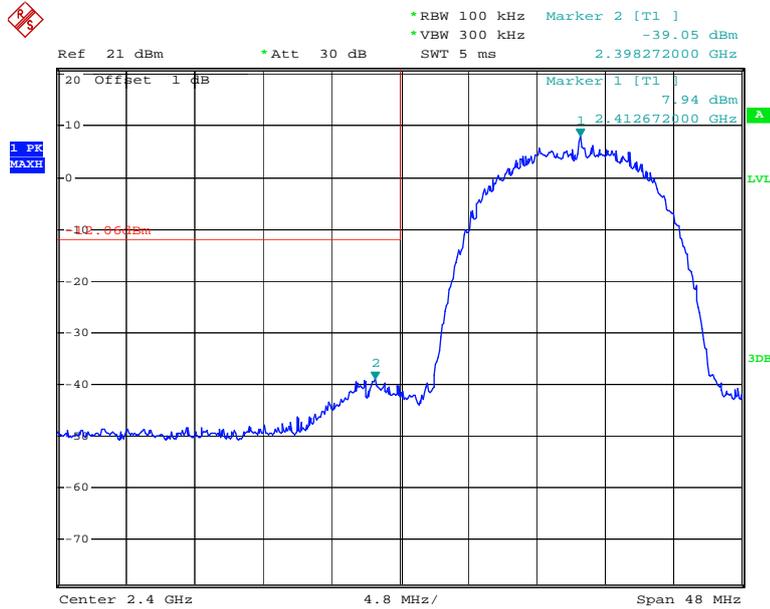


Date: 5.MAY.2016 14:06:53

**Chain 0, 802.11b: Band Edge, Right Side**

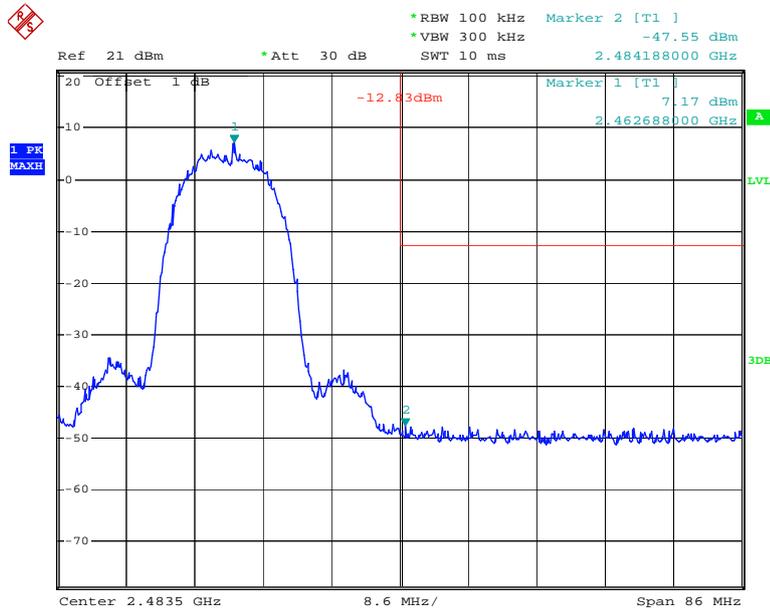


Date: 5.MAY.2016 14:51:03

### Chain 0, 802.11g: Band Edge, Left Side

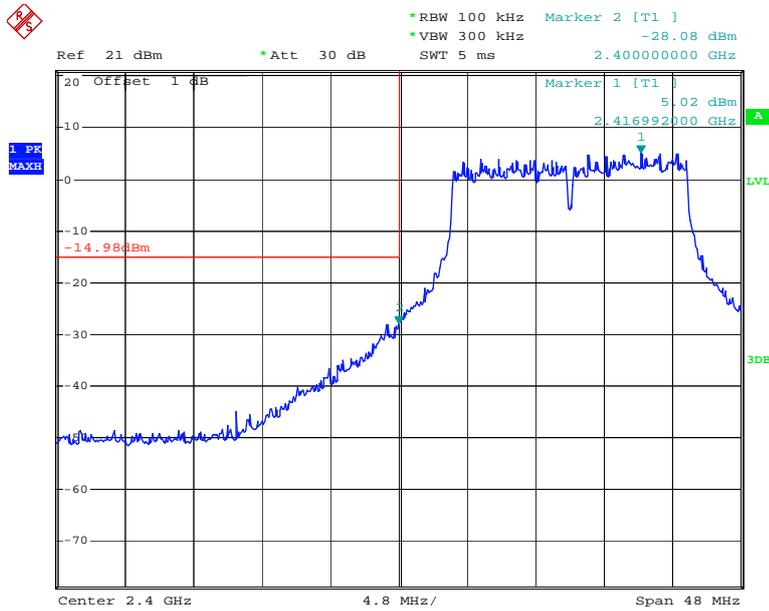


Date: 5.MAY.2016 14:57:18

### Chain 0, 802.11g: Band Edge, Right Side

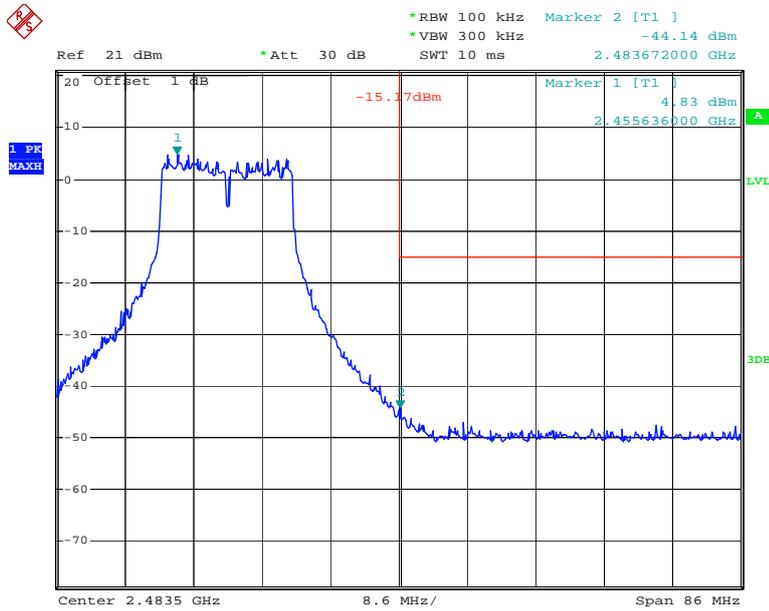


Date: 5.MAY.2016 15:25:58

**Chain 0, 802.11n ht20 Band Edge, Left Side**

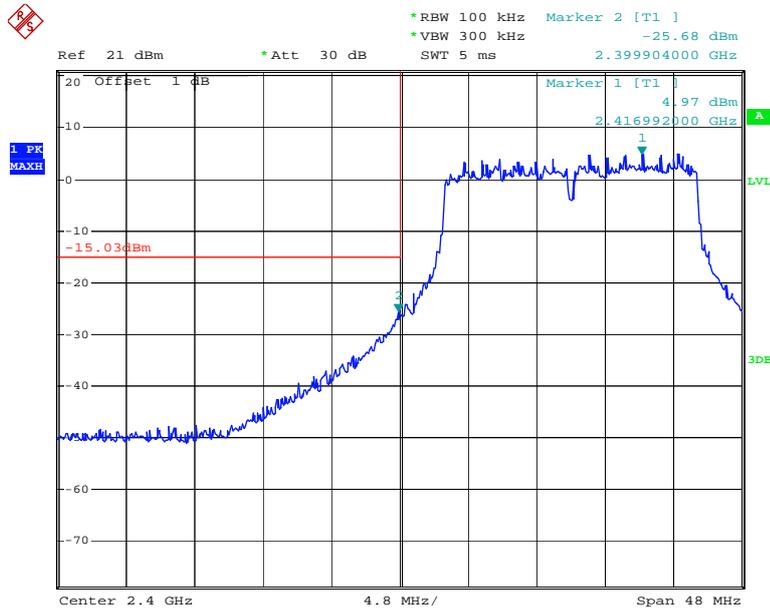


Date: 5.MAY.2016 15:30:19

**Chain 0, 802.11n ht20 Band Edge, Right Side**

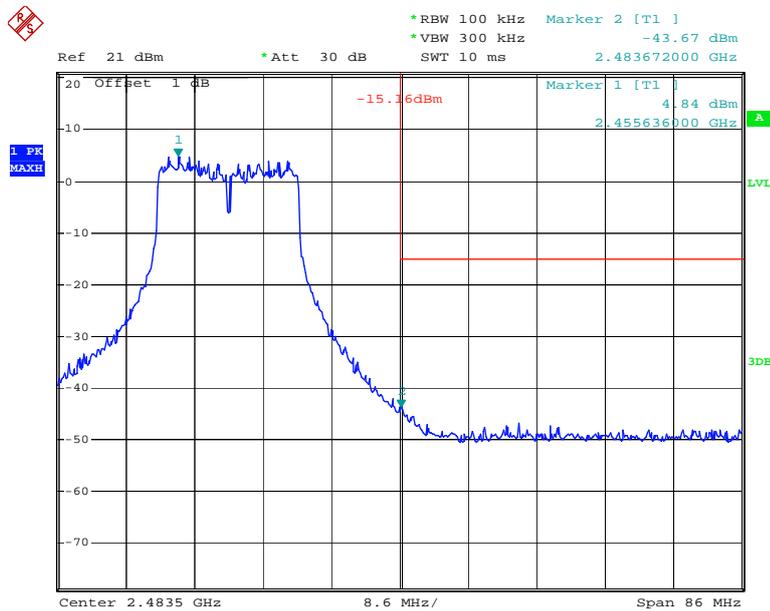


Date: 5.MAY.2016 15:40:45

**Chain 0, 802.11n ht40 Band Edge, Left Side**

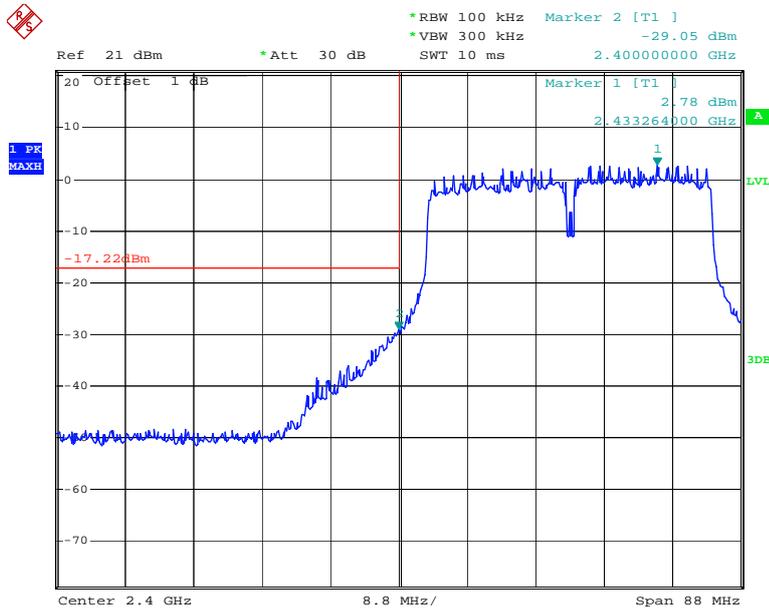


Date: 5.MAY.2016 15:47:01

**Chain 0, 802.11n ht40 Band Edge, Right Side**

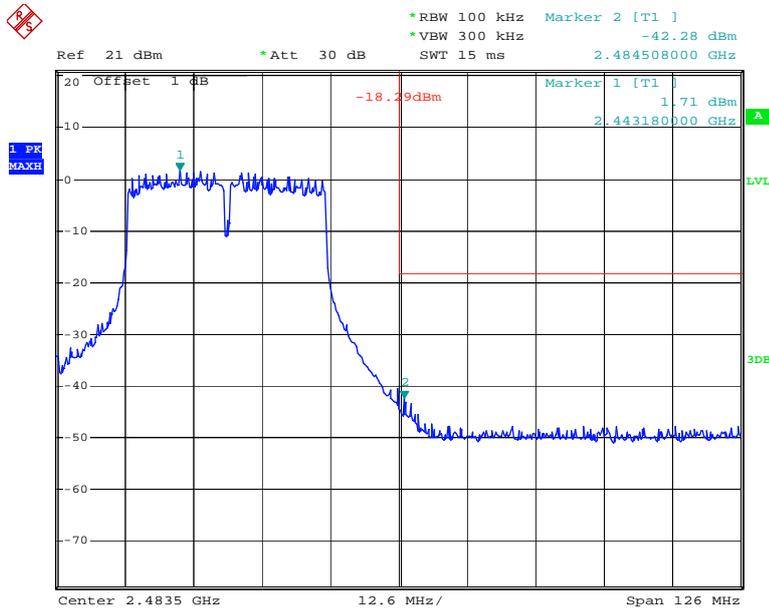


Date: 5.MAY.2016 15:56:11

### Chain 1, 802.11b: Band Edge, Left Side

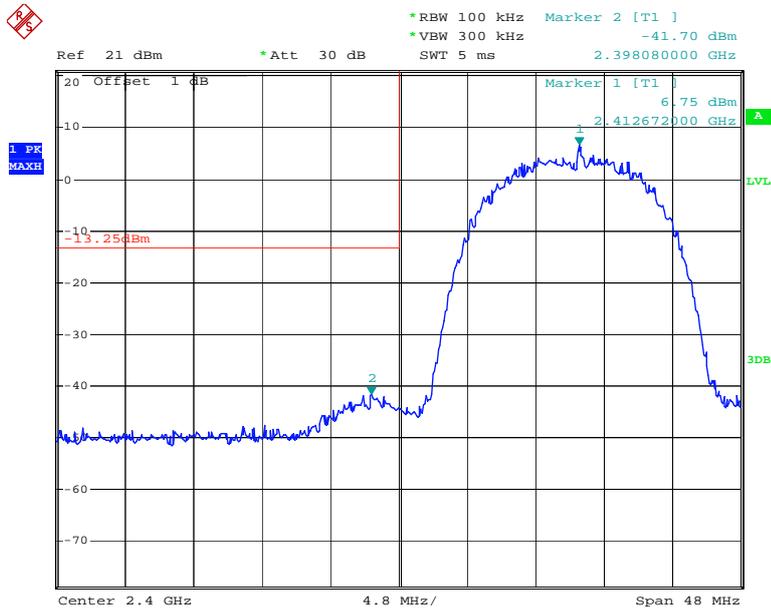


Date: 5.MAY.2016 20:27:11

### Chain 1, 802.11b: Band Edge, Right Side

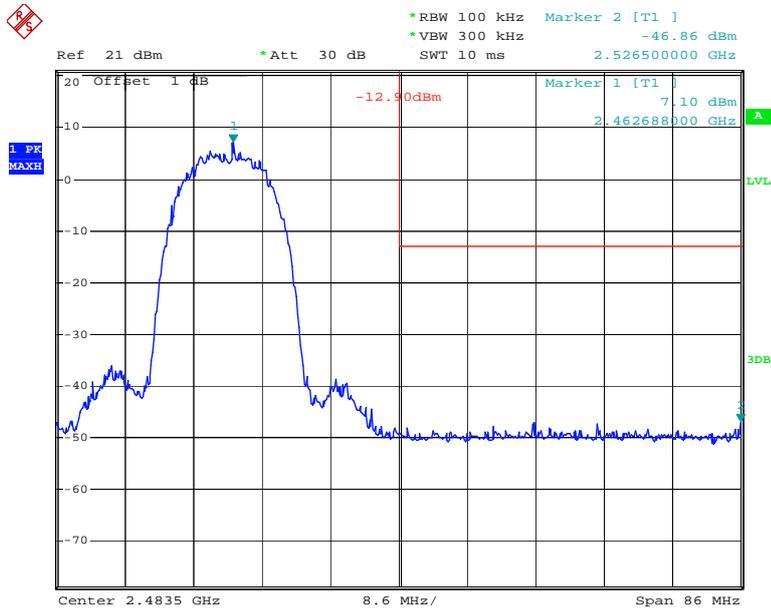


Date: 5.MAY.2016 20:15:08

### Chain 1, 802.11g: Band Edge, Left Side

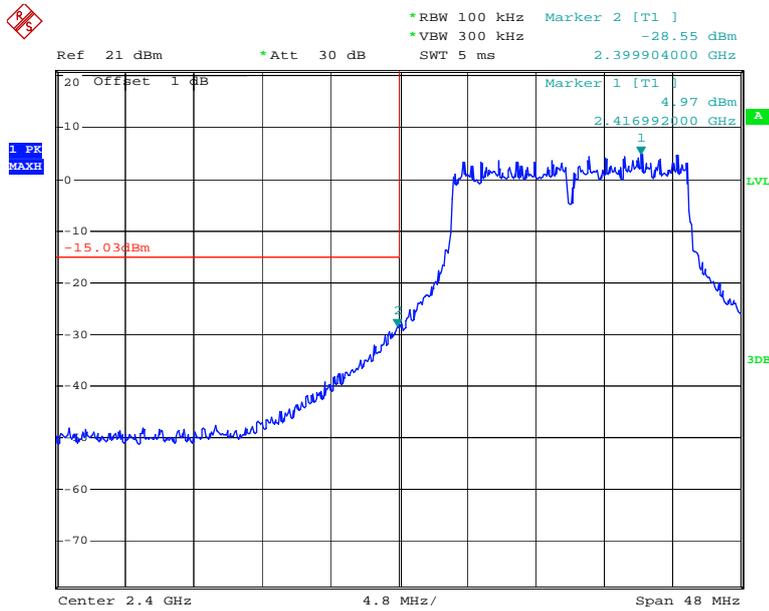


Date: 5.MAY.2016 20:09:12

### Chain 1, 802.11g: Band Edge, Right Side

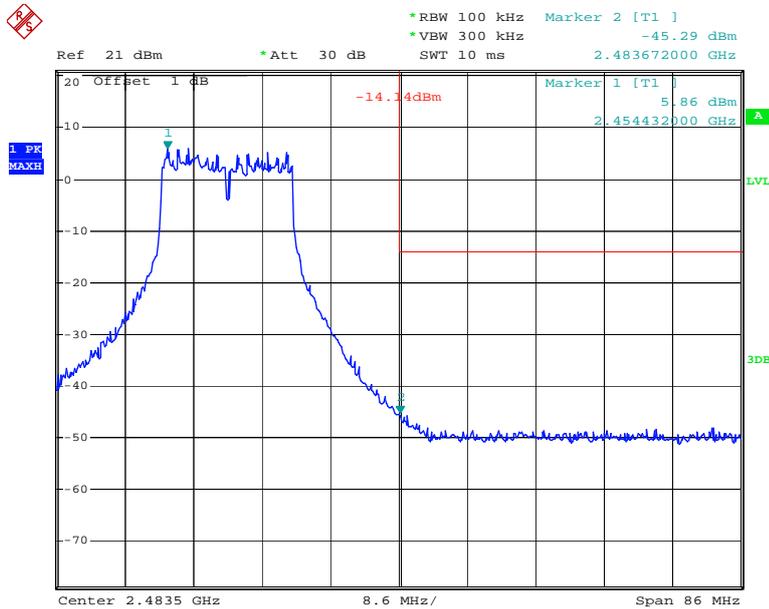


Date: 5.MAY.2016 19:52:38

**Chain 1, 802.11n ht20 Band Edge, Left Side**

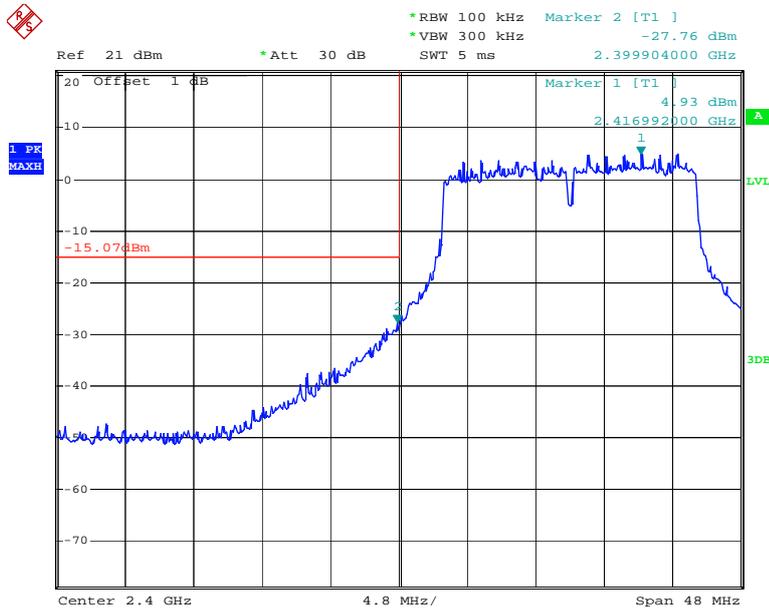


Date: 5.MAY.2016 19:44:12

**Chain 1, 802.11n ht20 Band Edge, Right Side**

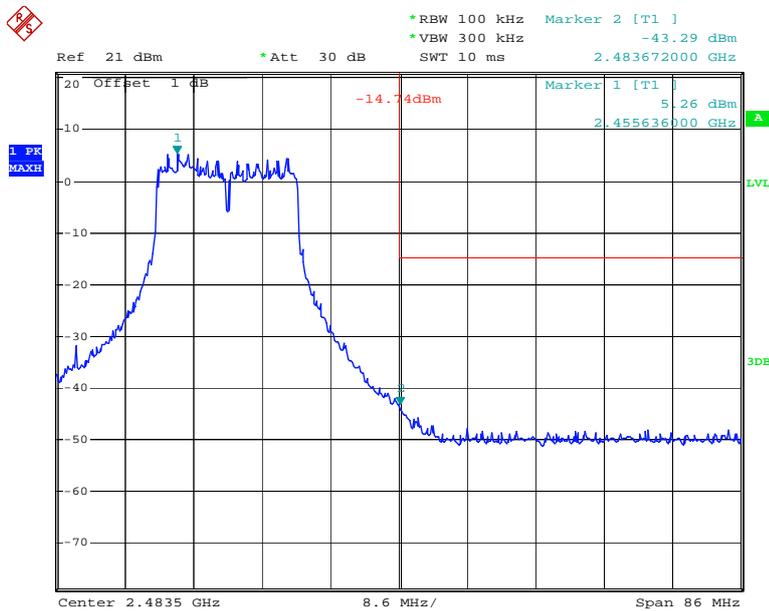


Date: 5.MAY.2016 19:45:27

**Chain 1, 802.11n ht40 Band Edge, Left Side**

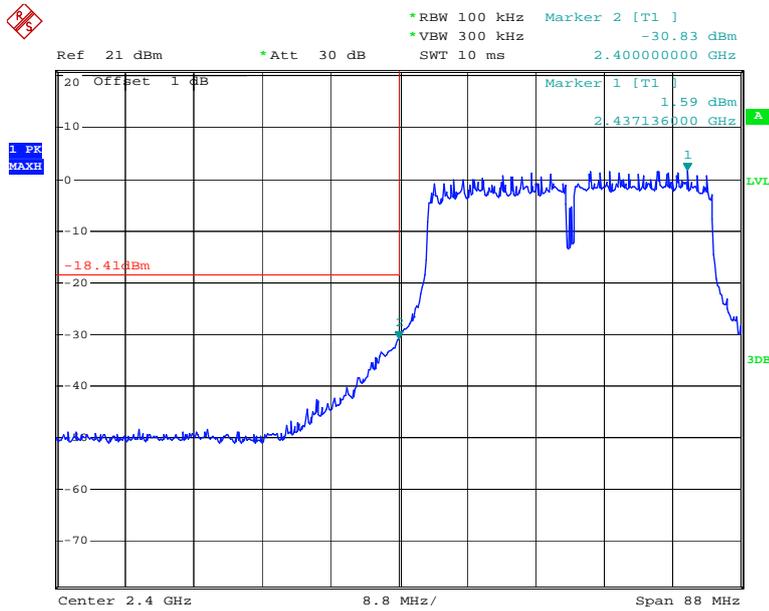

Date: 5.MAY.2016 16:08:36

**Chain 1, 802.11n ht40 Band Edge, Right Side**

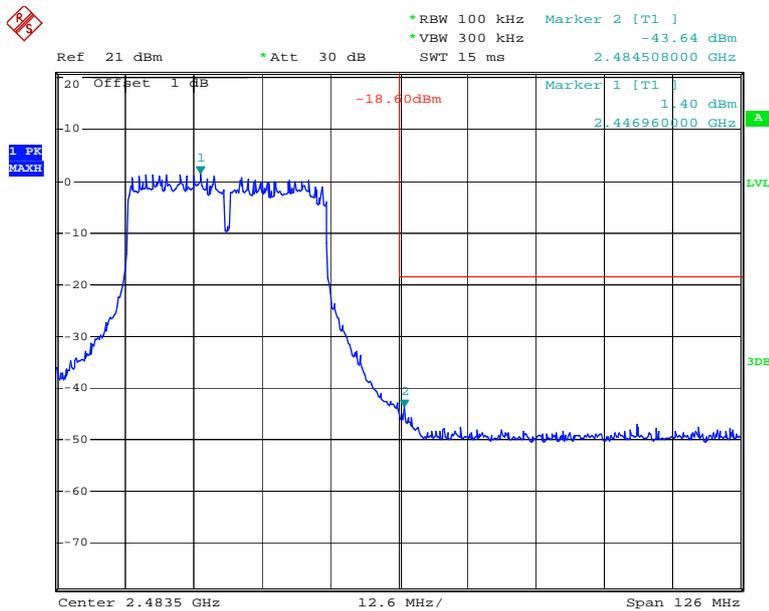

Date: 5.MAY.2016 16:01:36

## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	29.1 °C
<b>Relative Humidity:</b>	68 %
<b>ATM Pressure:</b>	100.3kPa

\* The testing was performed by Dean Liu on 2016-05-05.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots

Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)		Total (dBm/3kHz)	Limit (dBm/3kHz)
			Chain 0	Chain 1		
802.11b	Low	2412	-9.1	-10.35	-6.67	≤6
	Middle	2437	-9.21	-9.64	-6.41	≤6
	High	2462	-9.89	-9.16	-6.5	≤6
802.11g	Low	2412	-10.24	-10.26	-7.24	≤6
	Middle	2437	-10.27	-9.43	-6.82	≤6
	High	2462	-10.45	-9.51	-6.94	≤6
802.11n20	Low	2412	-9.95	-10.58	-7.24	≤6
	Middle	2437	-10.25	-11.07	-7.63	≤6
	High	2462	-9.63	-10.37	-6.97	≤6
802.11n40	Low	2422	-10.33	-10.63	-7.47	≤6
	Middle	2437	-11.49	-11.05	-8.25	≤6
	High	2452	-11.71	-11.92	-8.8	≤6

Note: Both antenna maximum antenna gains are 5dBi, and employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(\text{NANT}/\text{NSS}) \text{ dB.}$$


So:

$$\text{Directional gain} = \text{GANT} + \text{Array Gain} = 5 + 10 \cdot \log(2) = 8 \text{ dBi}$$

The Power density Limits was reduce 2dB.


**Chain 0**

**Power Spectral Density, 802.11b Low Channel**

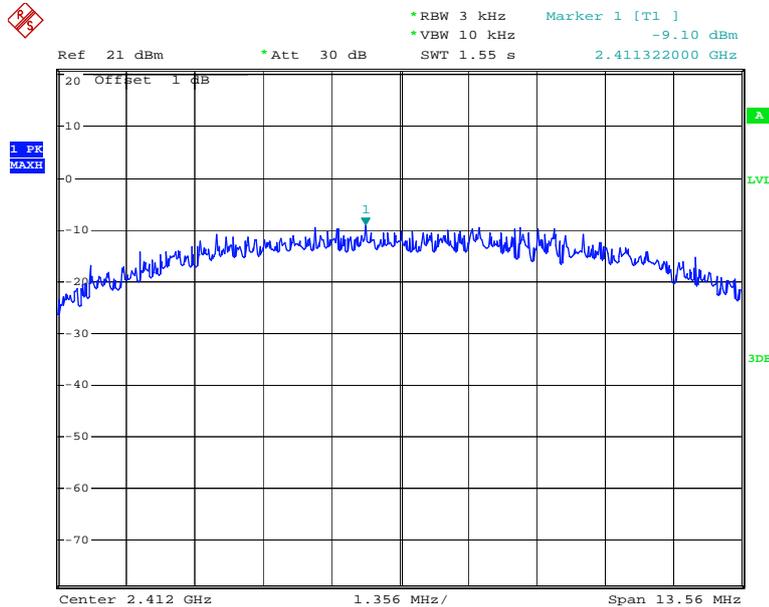


Date: 5.MAY.2016 14:06:04

### Power Spectral Density, 802.11b Middle Channel

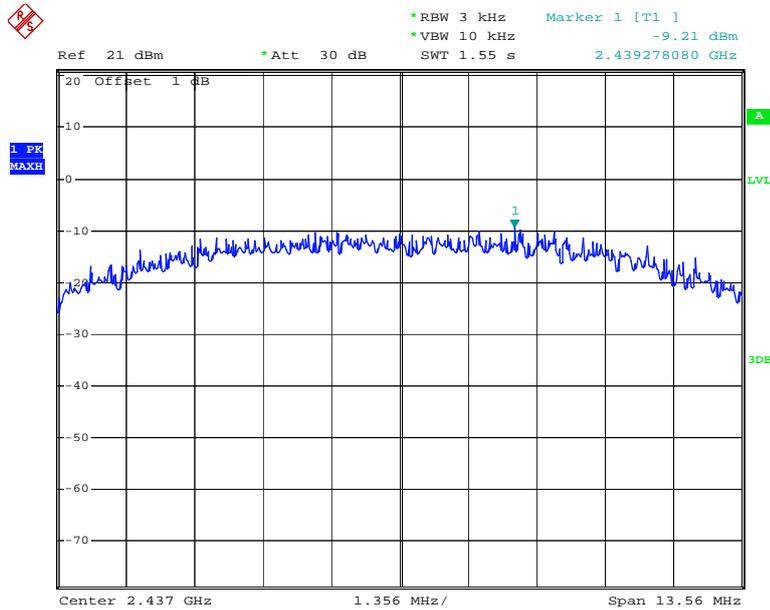


Date: 5.MAY.2016 14:46:30

### Power Spectral Density, 802.11b High Channel

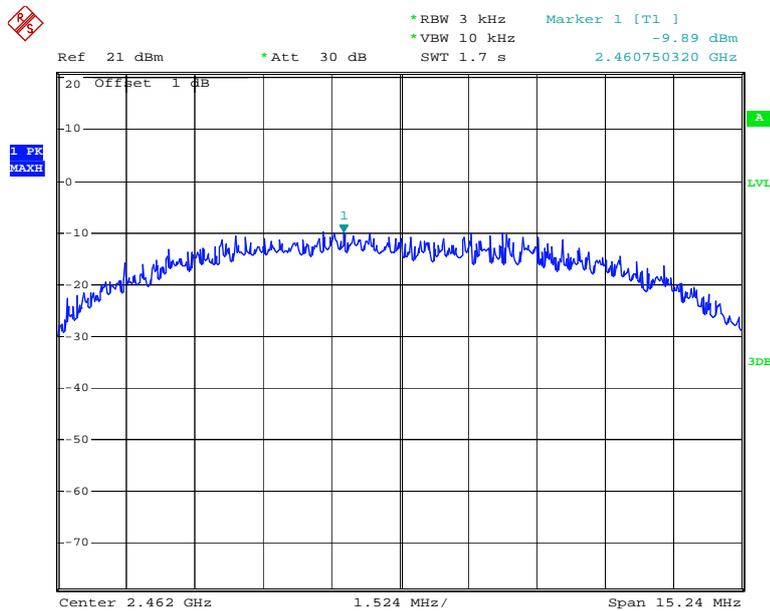


Date: 5.MAY.2016 14:50:21

### Power Spectral Density, 802.11g Low Channel

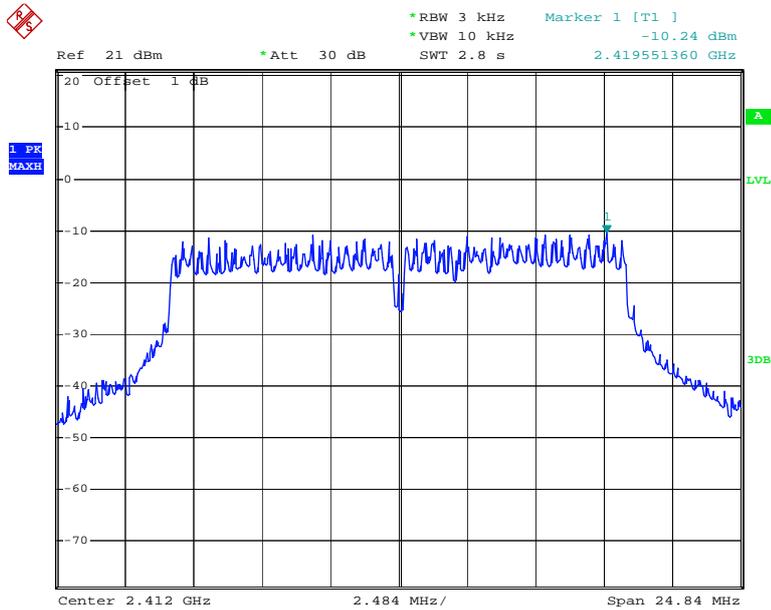


Date: 5.MAY.2016 14:56:39

### Power Spectral Density, 802.11g Middle Channel

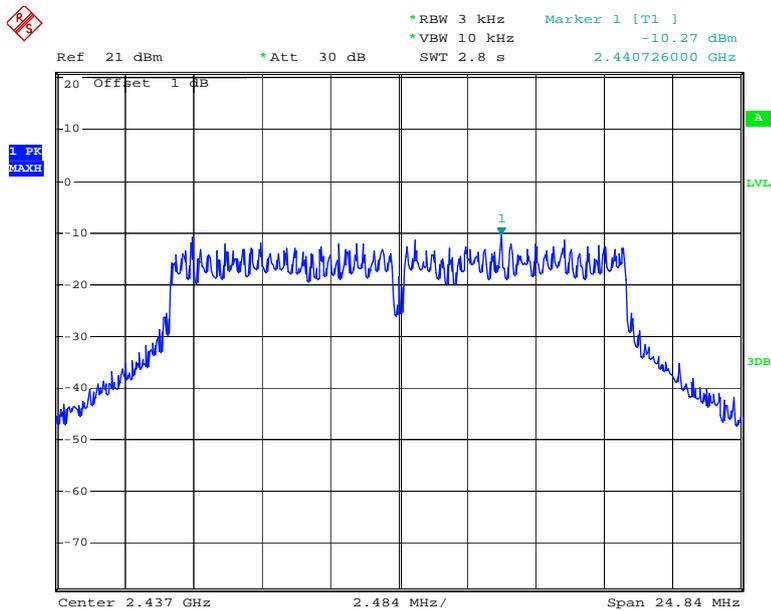


Date: 5.MAY.2016 15:00:28

### Power Spectral Density, 802.11g High Channel

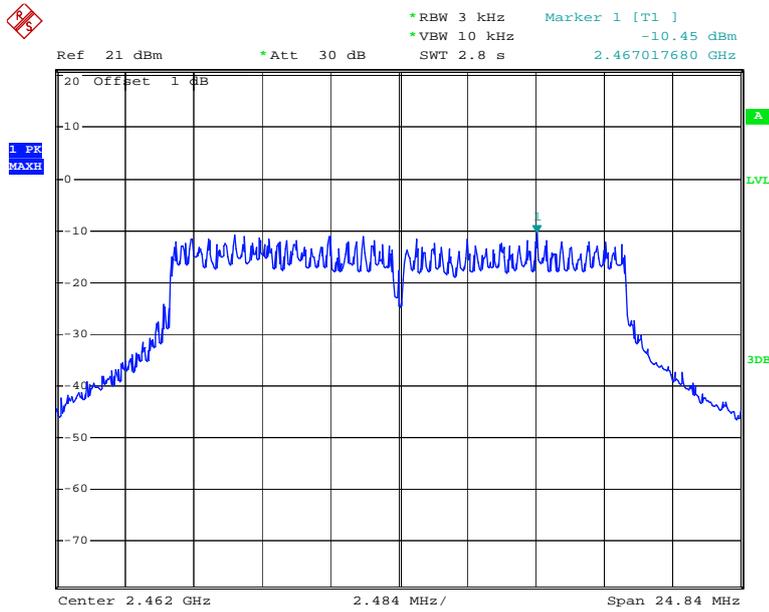


Date: 5.MAY.2016 15:25:13

### Power Spectral Density, 802.11n ht20 Low Channel

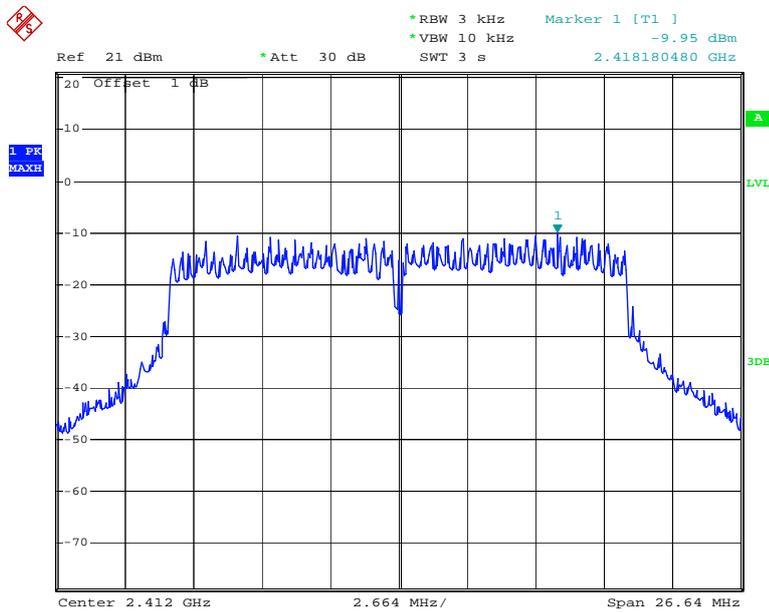


Date: 5.MAY.2016 15:29:28

### Power Spectral Density, 802.11n ht20 Middle Channel

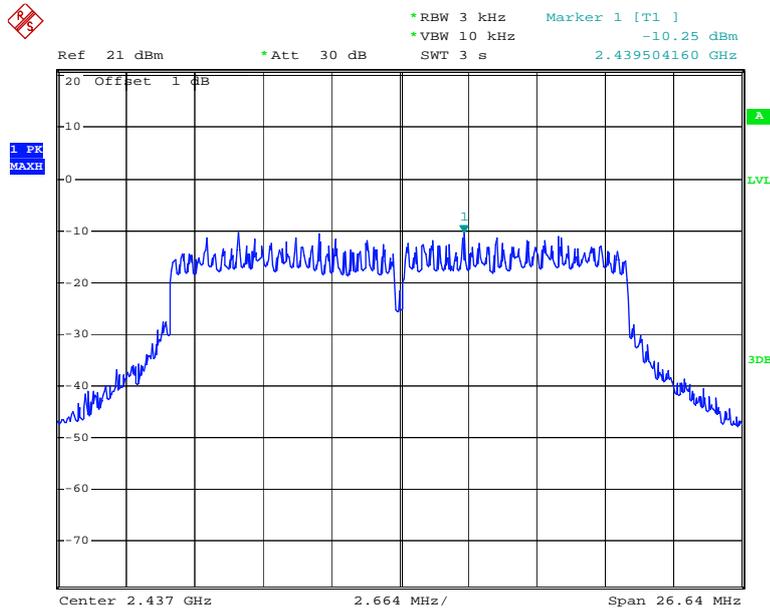


Date: 5.MAY.2016 15:34:24

### Power Spectral Density, 802.11n ht20 High Channel

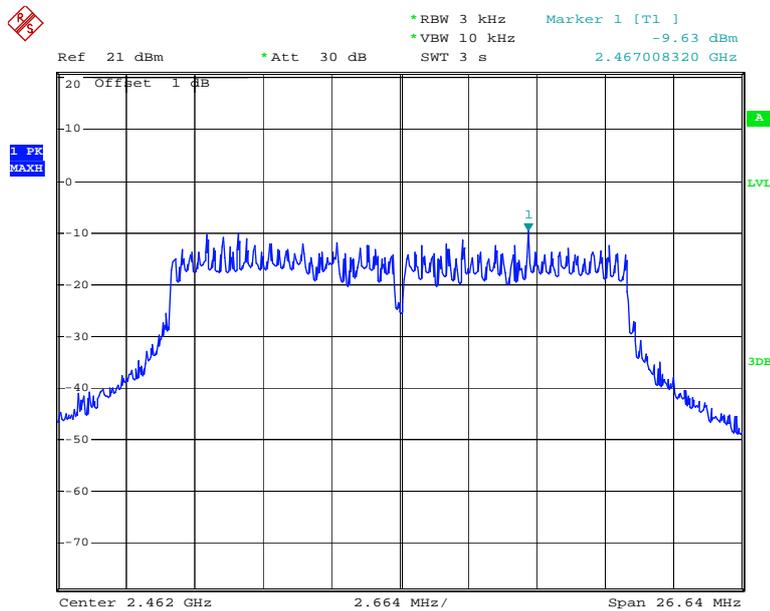


Date: 5.MAY.2016 15:39:45

### Power Spectral Density, 802.11n ht40 Low Channel

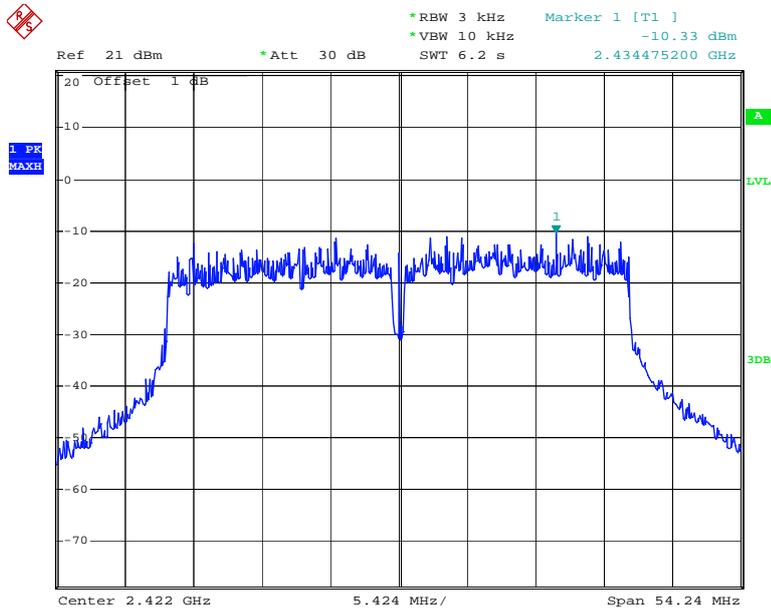


Date: 5.MAY.2016 15:46:22

### Power Spectral Density, 802.11n ht40 Middle Channel

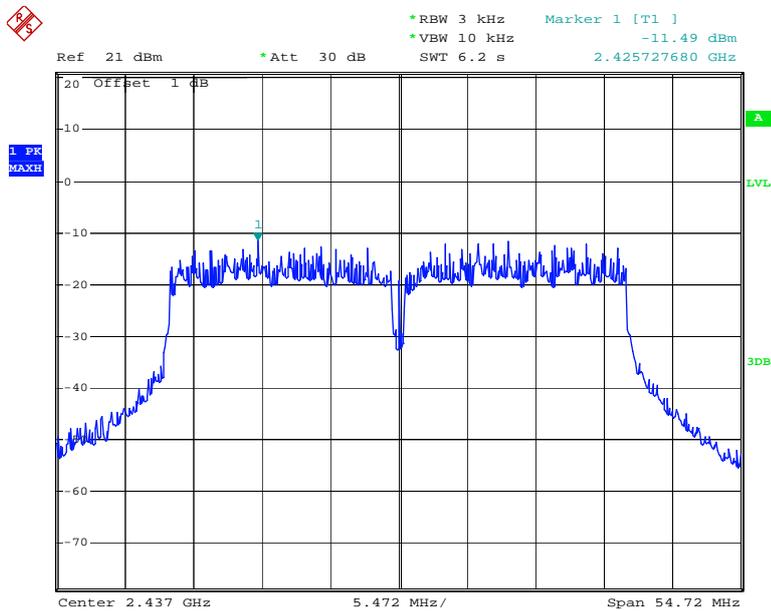

Date: 5.MAY.2016 15:51:47


### Power Spectral Density, 802.11n ht40 High Channel

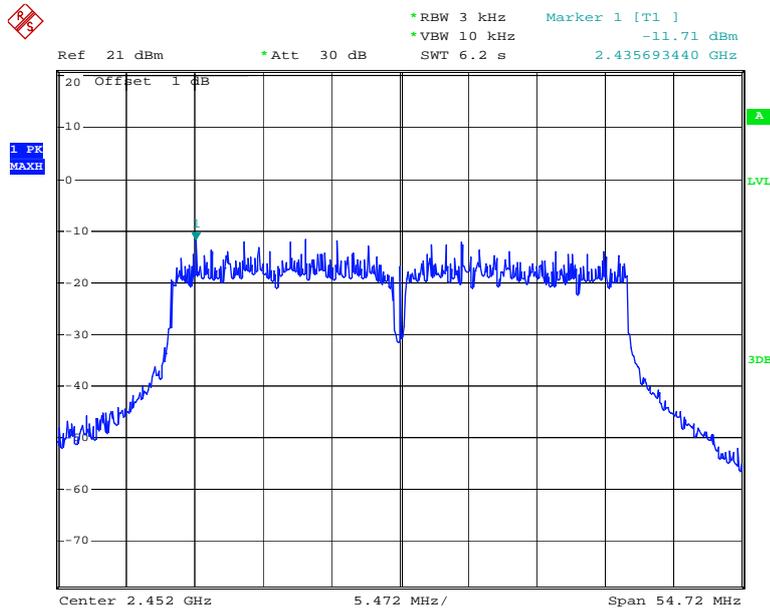

Date: 5.MAY.2016 15:55:25


### Chain 1

### Power Spectral Density, 802.11b Low Channel

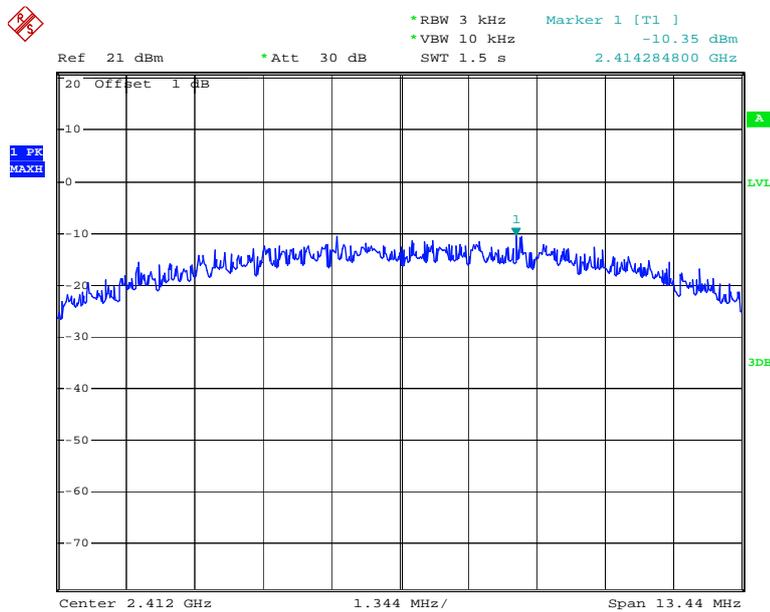


Date: 5.MAY.2016 20:26:25

### Power Spectral Density, 802.11b Middle Channel

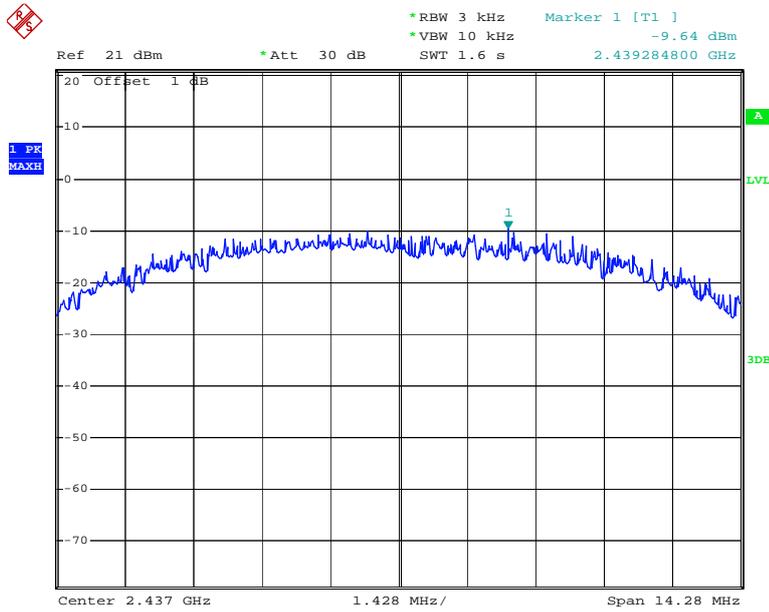


Date: 5.MAY.2016 20:18:39

### Power Spectral Density, 802.11b High Channel

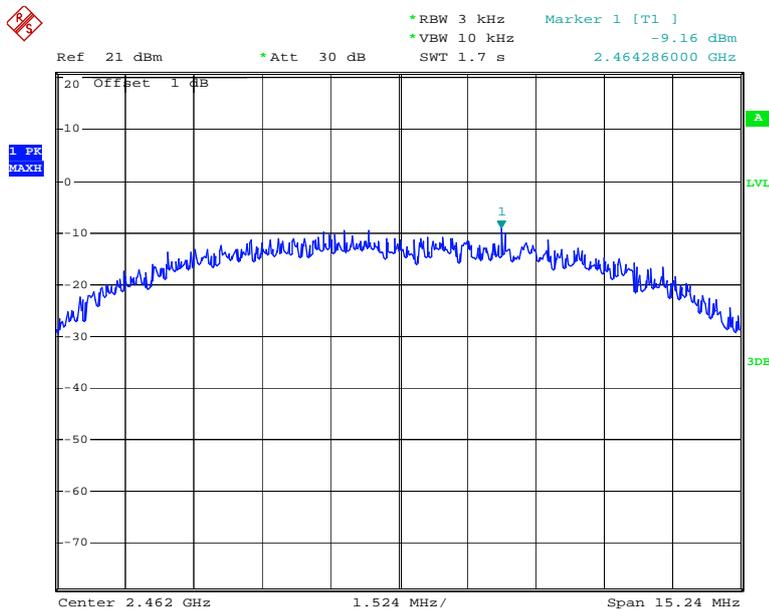


Date: 5.MAY.2016 20:14:18

### Power Spectral Density, 802.11g Low Channel

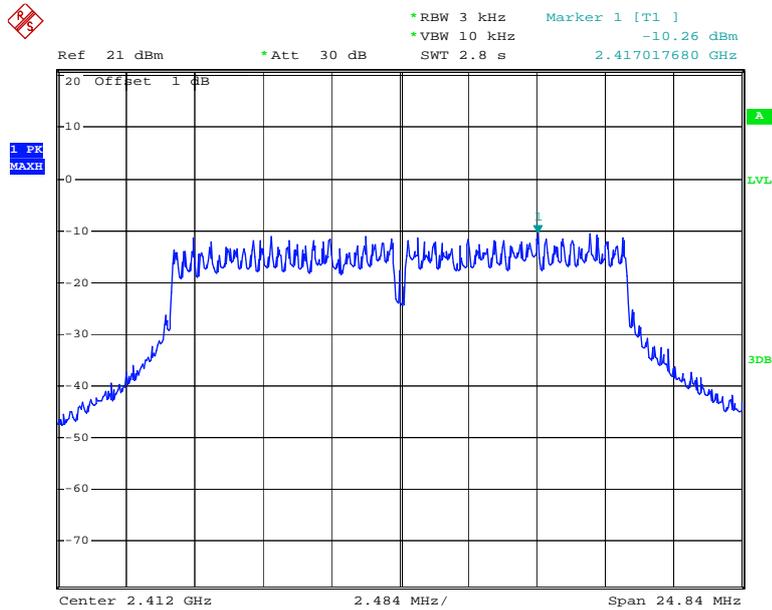


Date: 5.MAY.2016 20:08:21

### Power Spectral Density, 802.11g Middle Channel

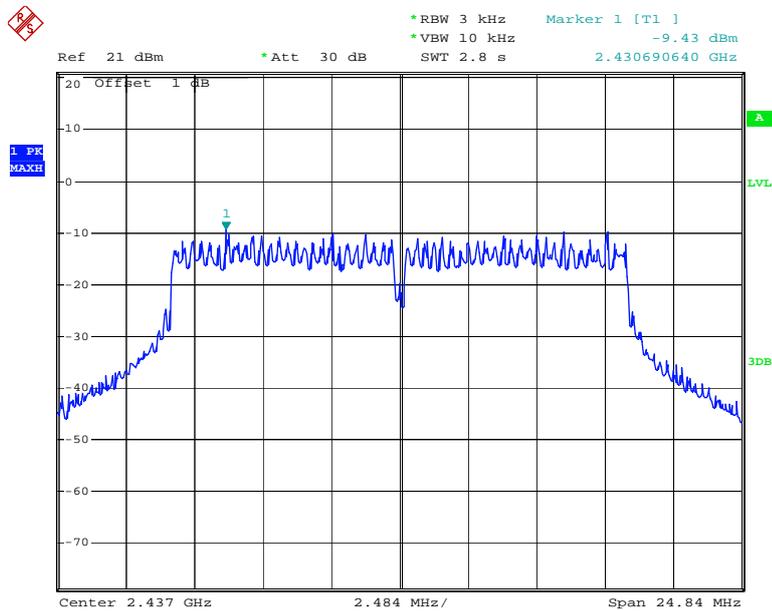


Date: 5.MAY.2016 20:02:31

### Power Spectral Density, 802.11g High Channel

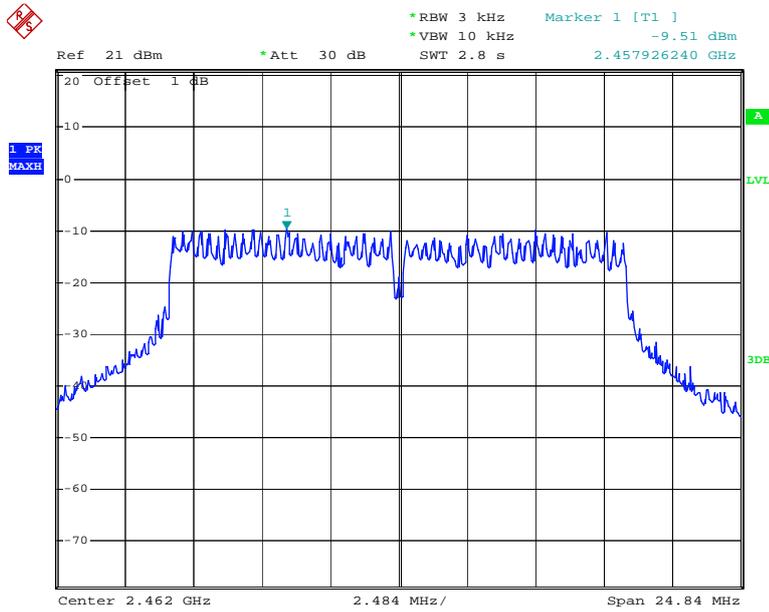


Date: 5.MAY.2016 19:51:54

### Power Spectral Density, 802.11n ht20 Low Channel

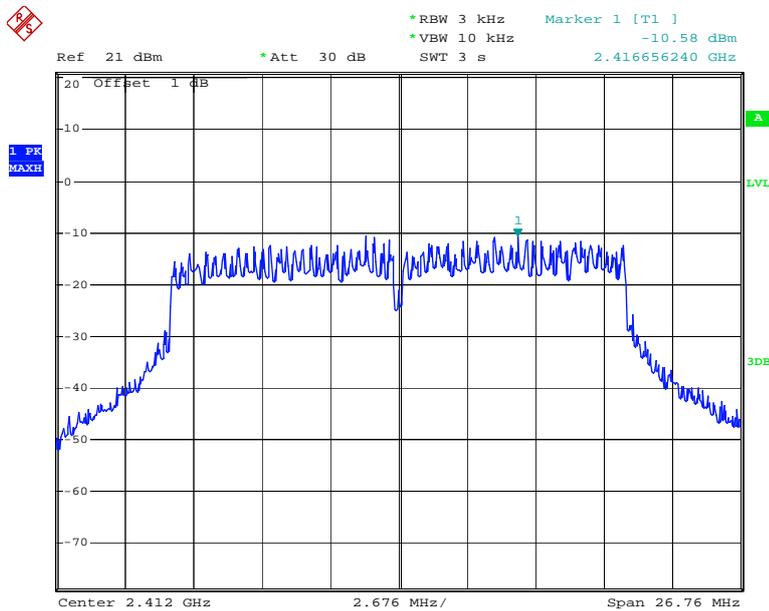


Date: 5.MAY.2016 19:43:20

### Power Spectral Density, 802.11n ht20 Middle Channel

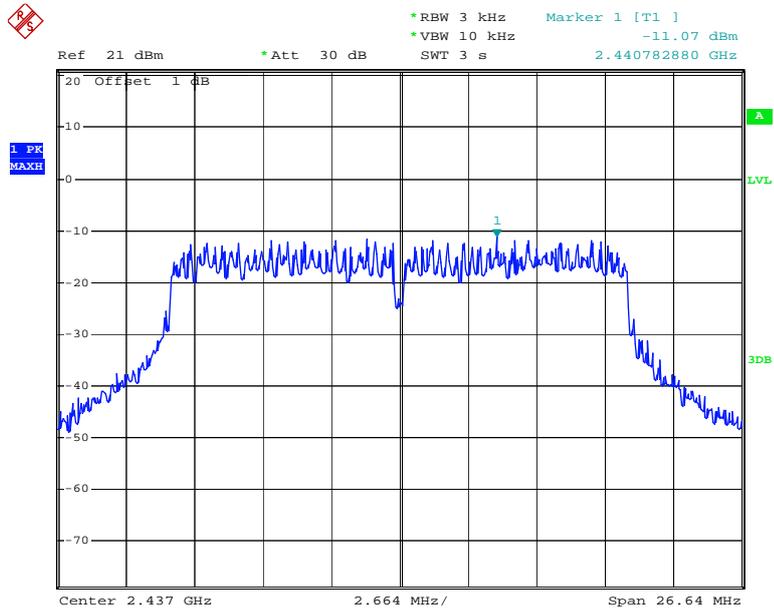


Date: 5.MAY.2016 16:39:33

### Power Spectral Density, 802.11n ht20 High Channel

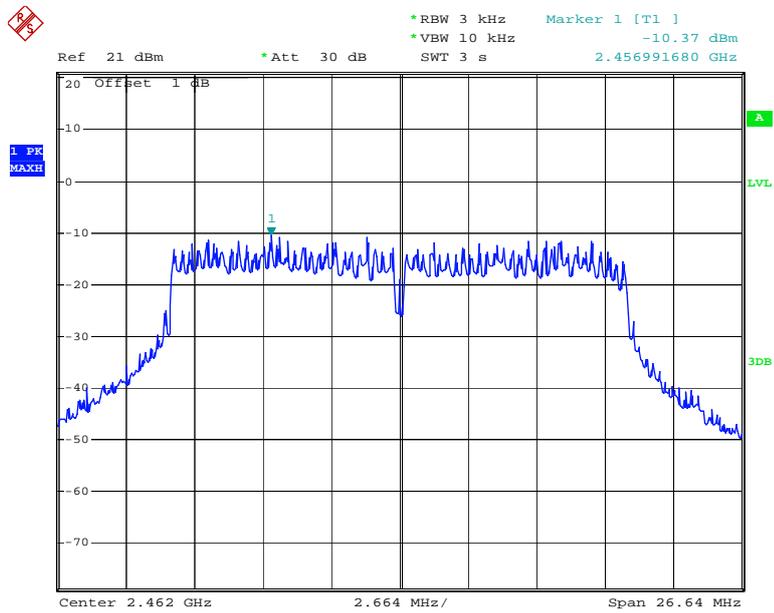


Date: 5.MAY.2016 16:12:20

### Power Spectral Density, 802.11n ht40 Low Channel

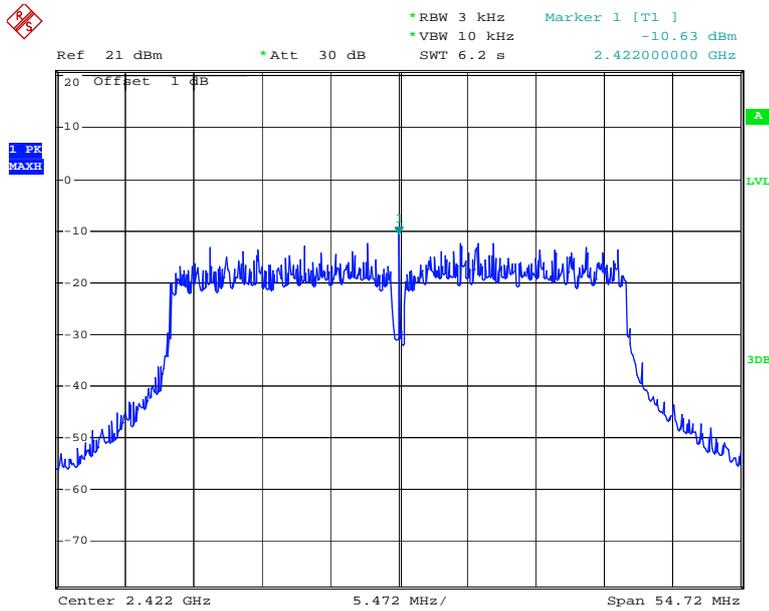


Date: 5.MAY.2016 16:07:56

### Power Spectral Density, 802.11n ht40 Middle Channel

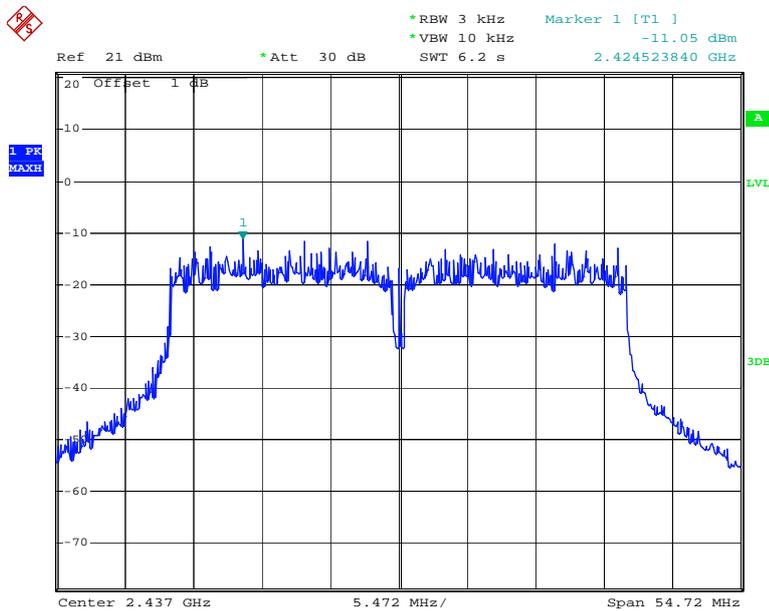

Date: 5.MAY.2016 16:04:34

### Power Spectral Density, 802.11n ht40 High Channel

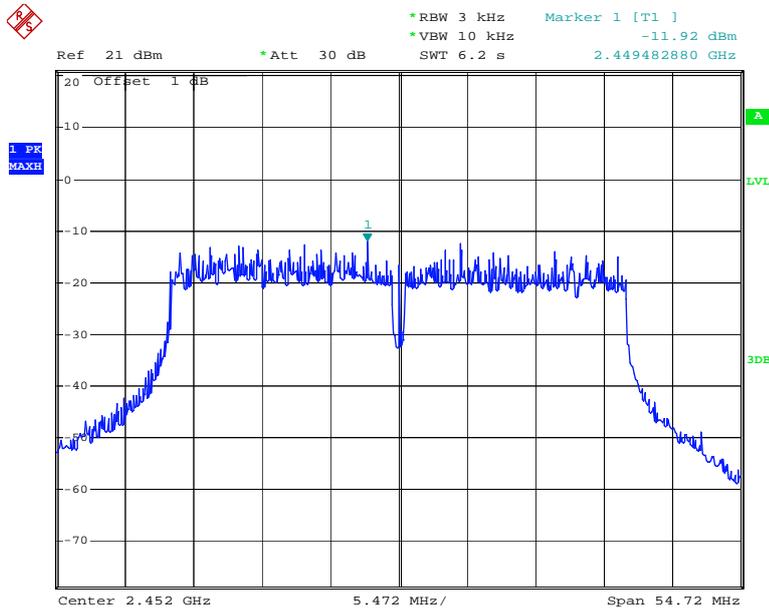

Date: 5.MAY.2016 16:00:40

\*\*\*\*\* END OF REPORT \*\*\*\*\*