



Appendix B. SAR Measurement Plots

Table of contents
GSM850 Body
GSM1900 Body
UMTS Band V Body
UMTS Band II Body
LTE Band V Body
LTE Band VII Body
WiFi 2.4G Body
WiFi 5G Body

Test Laboratory: HUAWEI SAR/HAC Lab

R226 GSM850 GPRS 2TS 190CH Back side 10mm

DUT: R226; Type: Mobile WiFi; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 1.009$ S/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2013-7-31
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.765 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.05 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.958 W/kg

SAR(1 g) = 0.678 W/kg; SAR(10 g) = 0.471 W/kg

Maximum value of SAR (measured) = 0.773 W/kg

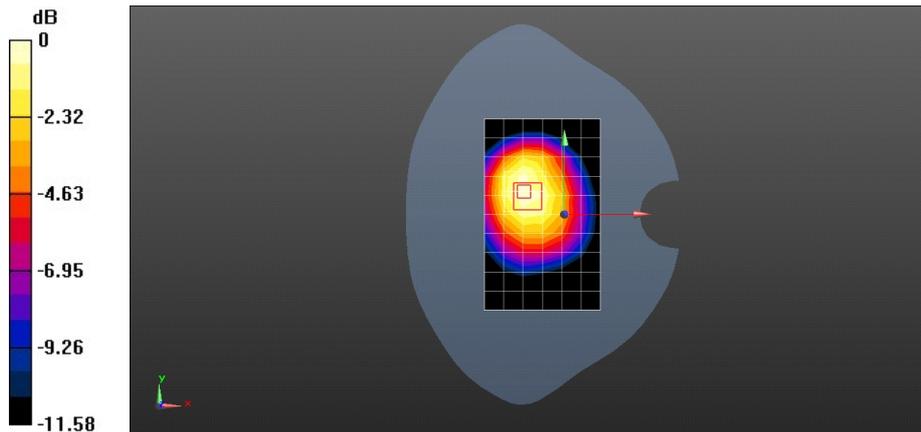

0 dB = 0.773 W/kg = -1.12 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

R226 GSM1900 GPRS 2TS 661CH Back side 10mm

DUT: R226; Type: Mobile WiFi; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz;Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.521$ S/m; $\epsilon_r = 52.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.35, 7.35, 7.35); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2013-7-31
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.872 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.06 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.791 W/kg; SAR(10 g) = 0.453 W/kg

Maximum value of SAR (measured) = 0.965 W/kg

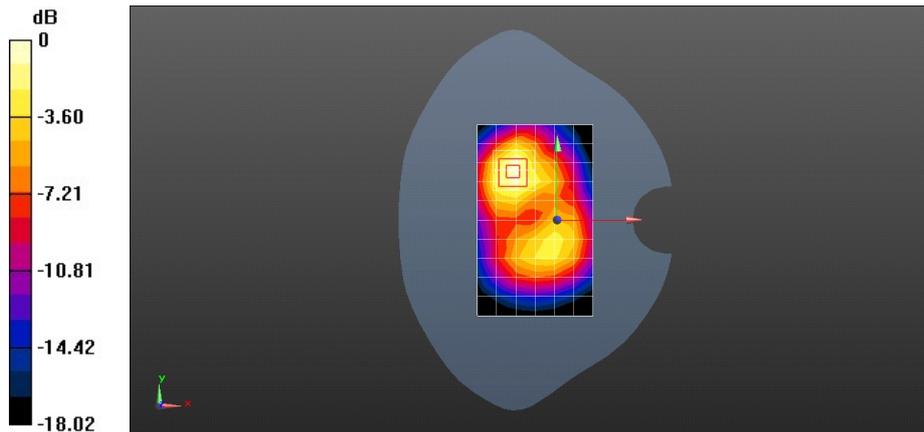

0 dB = 0.965 W/kg = -0.15 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

R226 UMTS Band V 4233CH Back side-repeated 10mm

DUT: R226; Type: Mobile WiFi; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 1.019$ S/m; $\epsilon_r = 54.001$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2013-7-31
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.01 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 25.04 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.909 W/kg; SAR(10 g) = 0.637 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

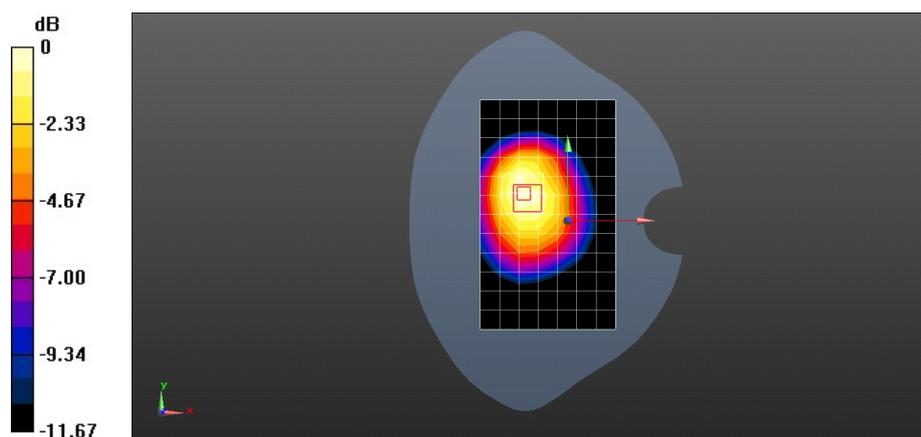

0 dB = 1.04 W/kg = 0.15 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

R226 UMTS Band II 9400CH Back side 10mm

DUT: R226; Type: Mobile WiFi; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.521$ S/m; $\epsilon_r = 52.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.35, 7.35, 7.35); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2013-7-31
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.656 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.542 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.928 W/kg

SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.320 W/kg

Maximum value of SAR (measured) = 0.681 W/kg

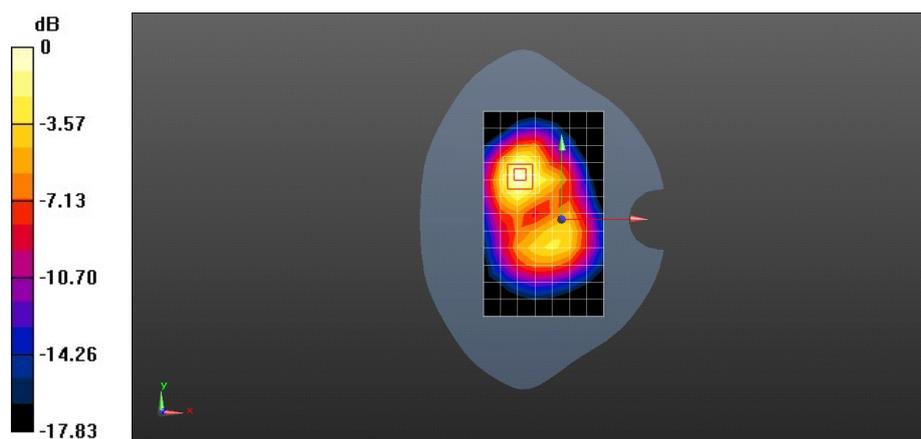

0 dB = 0.681 W/kg = -1.67 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

R226 LTE Band V 10M QPSK 1RB#25 20525CH Back side 10mm -repeated

DUT: R226; Type: Mobile WiFi; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1.007$ S/m; $\epsilon_r = 53.869$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.07, 9.07, 9.07); Calibrated: 2013-7-26;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2013-7-31
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.09 W/kg

Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.39 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.703 W/kg

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.16 W/kg

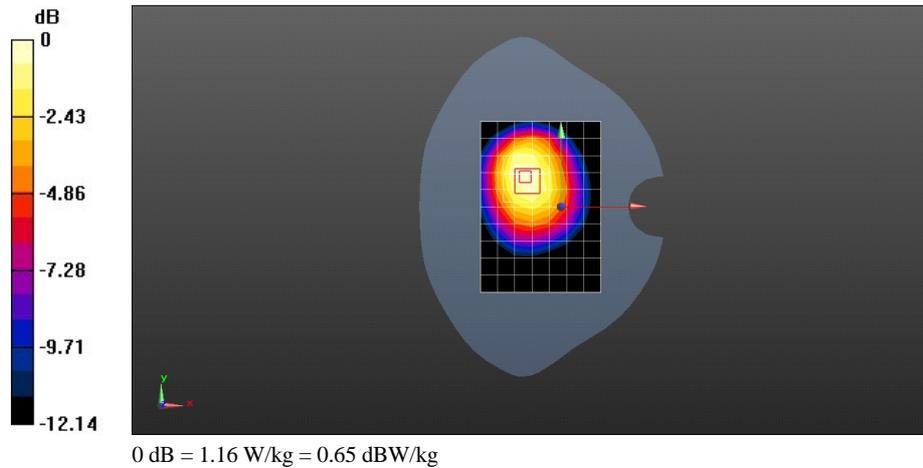

Test Laboratory: HUAWEI SAR/HAC Lab

R226 LTE Band VII 20M QPSK 1RB#0 21350CH Right side-repeated 10mm

DUT: R226; Type: Mobile WiFi; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.098$ S/m; $\epsilon_r = 50.661$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(6.75, 6.75, 6.75); Calibrated: 2013-7-26;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2013-7-31
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.24 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.56 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.998 W/kg; SAR(10 g) = 0.459 W/kg

Maximum value of SAR (measured) = 1.31 W/kg

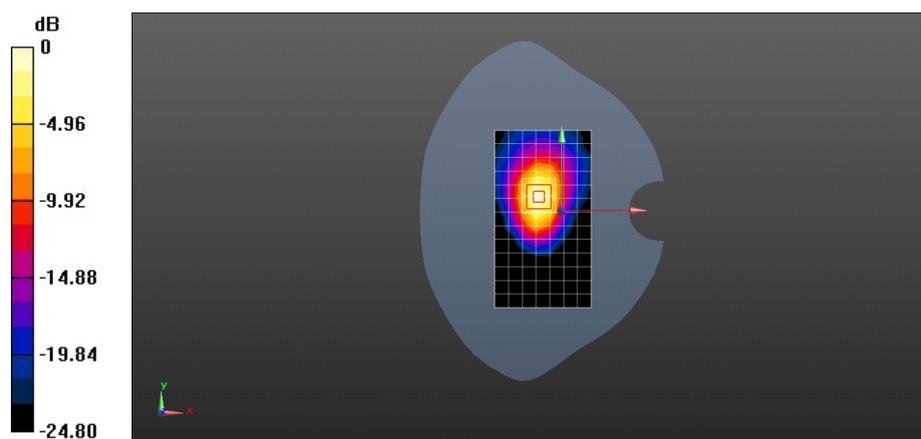

0 dB = 1.31 W/kg = 1.19 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

R226 WiFi 802.11b 5CH Front side 10mm

DUT: R226; Type: Mobile WiFi; Serial: SARI

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2432 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2432$ MHz; $\sigma = 1.934$ S/m; $\epsilon_r = 51.265$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(6.91, 6.91, 6.91); Calibrated: 2013-7-26;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2013-7-31
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.131 W/kg


Configuration/Body/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.113 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.145 W/kg

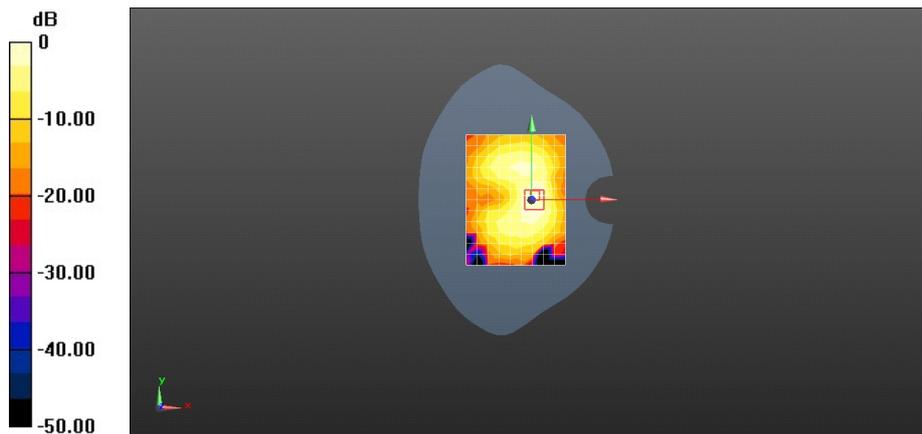

0 dB = 0.145 W/kg = -8.38 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

R226 WiFi 802.11n MIMO 40M 159CH Front side 10mm

DUT: R226; Type: Mobile WiFi; Serial: SARI

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 5795 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5795$ MHz; $\sigma = 6.232$ S/m; $\epsilon_r = 46.648$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(3.9, 3.9, 3.9); Calibrated: 2014-4-24;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn851; Calibrated: 2013-7-31
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (12x14x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.555 W/kg

Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.958 W/kg

SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.604 W/kg

