


# FCCE Test Report

## FCC ID: QISRIO-L01

This report concerns (check one):  Original Grant  Class I Change

**Project No.** : 1505C116A  
**Equipment** : Smart Phone  
**Model Name** : HUAWEI RIO-L01, RIO-L01  
**Applicant** : HUAWEI Technologies Co., Ltd  
**Address** : Huawei Industrial Base, Bantian Longgang, Shenzhen  
518129, P.R China

**Date of Receipt** : May 13, 2015  
Jul. 20, 2015  
**Date of Test** : May 13, 2015 ~ May 24, 2015  
Jul. 20, 2015 ~ Jul. 27, 2015  
**Issued Date** : Jul. 28, 2015  
**Tested by** : BTL Inc.

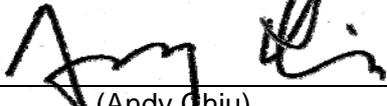**Testing Engineer** :   
(Pike Lee)  
**Technical Manager** :   
(Jeff Yang)  
**Authorized Signatory** :   
(Andy Chiu)

# **B T L I N C .**

B1, No. 37, Lane 365, Yang-Guang St.,  
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>1 . CERTIFICATION</b>	<b>5</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
<b>3 . GENERAL INFORMATION</b>	<b>8</b>
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
<b>4 . EMC EMISSION TEST</b>	<b>12</b>
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	16
4.2.6 TEST RESULTS (30 TO 1000 MHZ)	17
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	17
<b>5 . MEASUREMENT INSTRUMENTS LIST</b>	<b>18</b>
<b>6 . EUT TEST PHOTO</b>	<b>19</b>
<b>ATTACHMENT A - CONDUCTED EMISSION</b>	<b>25</b>
<b>ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>	<b>44</b>
<b>ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)</b>	<b>65</b>

**REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
BTL-FCCE-1-1505C116	Original Issue.	May 25, 2015
BTL-FCCE-1-1505C116A	Compared with previous report (BTL-FCCE-1-1505C116), add a card slot, support dual cards, the worst case of Radiated Emission has been retested and recorded in the test report, the rest are the same.	Jul. 28, 2015

## 1. CERTIFICATION

Equipment : Smart Phone  
Brand Name : HUAWEI  
Model Name : HUAWEI RIO-L01, RIO-L01  
Applicant : HUAWEI Technologies Co., Ltd  
Manufacturer : Huawei Industrial Base,Bantian Longgang,Shenzhen 518129, P.R China  
Address : HUAWEI Technologies Co., Ltd  
Factory : Huawei Industrial Base,Bantian Longgang,Shenzhen 518129, P.R China  
Address : HUAWEI Technologies Co., Ltd  
Date of Test : May 13, 2015 ~ May 24, 2015  
Jul. 20, 2015 ~ Jul. 27, 2015  
Standard(s) : FCC Part 15, Subpart B:2014  
ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1505C116A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B:2014 ANSI C63.4-2009	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

**NOTE:**

(1) " N/A" denotes test is not applicable in this test report.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of B1, No. 37, Lane 365, Yang-Guang St., Nei-Hu District, Taipei City 114, Taiwan.

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
C02	CISPR	150 KHz ~ 30MHz	2.59	

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)	NOTE
CB08	CISPR	30MHz ~ 200MHz	V	3.22	
		30MHz ~ 200MHz	H	3.55	
		200MHz ~ 1,000MHz	V	3.24	
		200MHz ~ 1,000MHz	H	3.11	
		1,000MHz ~ 18,000MHz	V	4.05	
		1,000MHz ~ 18,000MHz	H	3.97	
		18,000MHz ~ 40,000MHz	V	4.04	
		18,000MHz ~ 40,000MHz	H	4.01	

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	HUAWEI RIO-L01, RIO-L01
Model Difference	Only differ in model name.
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: Huawei Technologies Co., Ltd. Model: HW-050100U2W (US) Model: HW-050100E2W (EU) Model: HW-050100B2W (UK) Model: HW-050100A2W (AU) #2 Supplied from battery. Manufacturer: Huawei Technologies Co., Ltd. Battery Model: HB396481EBC
Power Rating	#1 I/P: ~100-240V 50/60Hz ,0.2A O/P: 5V  1A #2 DC 3.8V 3000mAh
Earphone	#1 Manufacturer: JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD. Model: MEMD1632B580A00 #2 Manufacturer: QUANCHENG ELECTRONIC CO.,LTD Model: 1311-3291-3.5MM-178

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The maximum operating frequency is 4GHz
3. Product Function and Intended Use

Mode		Work Frequency	
		Transmitt Frequency (MHz)	Receive Frequency (MHz)
GSM	GSM 850	824 - 849	869 - 894
	PCS1900	1850-1910	1930-1990
LTE	B7	2500 -2570	2620 -2690
Bluetooth		2402-2480	
Wi-Fi		2412-2462	
GPS		1575.42	
NFC		13.56MHz	

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.



Pretest Mode	Description
Mode 1	Adapter+camera on+idle+wifi+bt+gps+Earphone
Mode 2	Adapter+Playing+idle+nfc+speaker
Mode 3	Adapter+ Traffic (GSM)+ Earphone
Mode 4	Adapter+ Traffic (WCDMA)
Mode 5	Adapter+ Traffic (LTE)
Mode 6	Playing+idle+speaker
Mode 7	USB Copy(EUT with PC) +Earphone+idle

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+camera on+idle+wifi+bt+gps+Earphone
Mode 2	Adapter+Playing+idle+nfc+speaker
Mode 3	Adapter+ Traffic (GSM)+ Earphone
Mode 4	Adapter+ Traffic (WCDMA)
Mode 5	Adapter+ Traffic (LTE)
Mode 7	USB Copy(EUT with PC) +Earphone+idle

For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+camera on+idle+wifi+bt+gps+Earphone
Mode 2	Adapter+Playing+idle+nfc+speaker
Mode 3	Adapter+ Traffic (GSM)+ Earphone
Mode 4	Adapter+ Traffic (WCDMA)
Mode 5	Adapter+ Traffic (LTE)
Mode 6	Playing+idle+speaker
Mode 7	USB Copy(EUT with PC) +Earphone+idle

### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

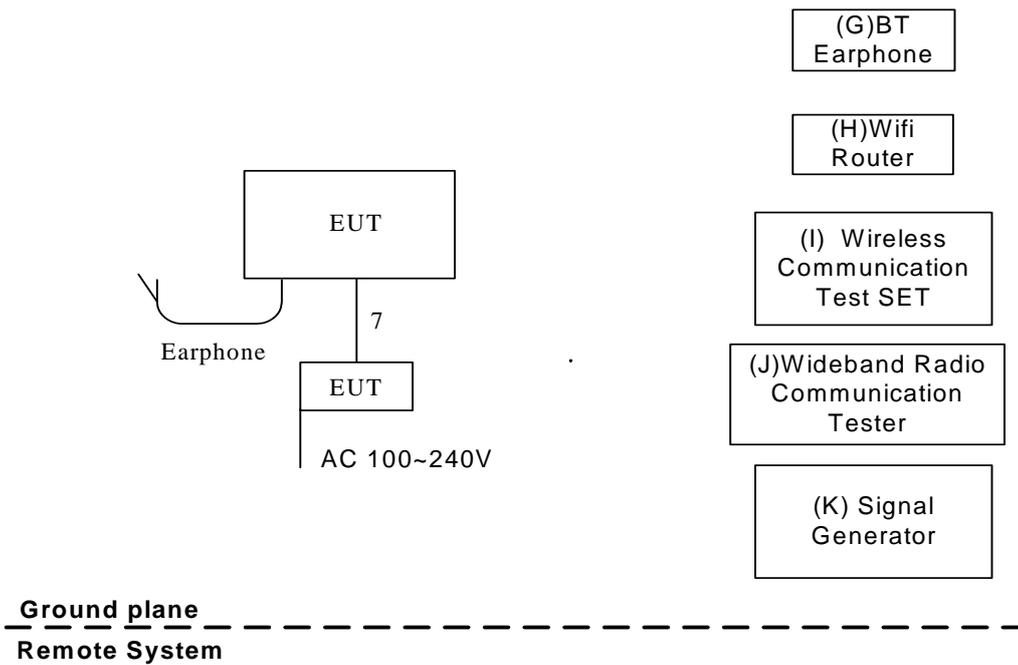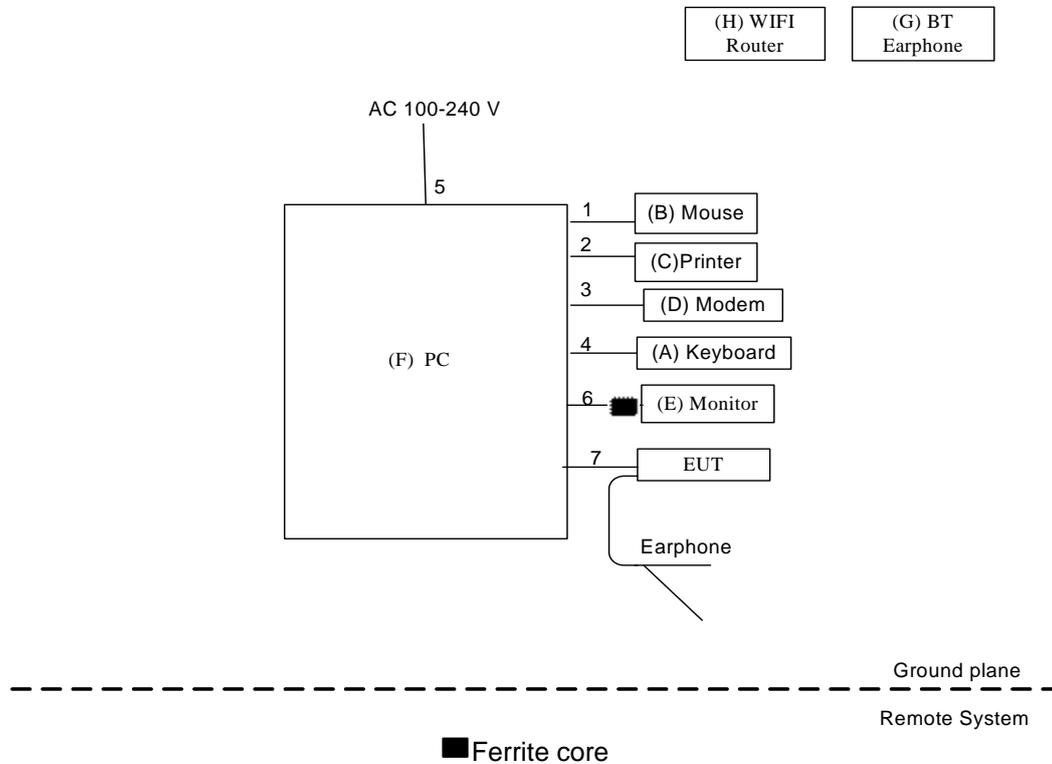

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
A	USB keyboard	hp	SK-2885	DOC	N/A	
B	USB Mouse	hp	SM-2020	DOC	N/A	
C	Printer	SII	DPU-414	DOC	3018507 B	
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131	
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-6418 0-6AG-1WNS	
F	PC	Dell 745	DCSM	DOC	G7K832X	
G	Router	TP-LINK	TL-WR1041N	N/A	N/A	
H	BT Earphone	N/A	N/A	N/A	N/A	
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183	
J	Wideband Radio Communication Tester	RS	CMW500	N/A	122125	
K	SignalGenerator	Agilent	E4438C	N/A	MY49071316	

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1.0m	USB Cable

Note:

(1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

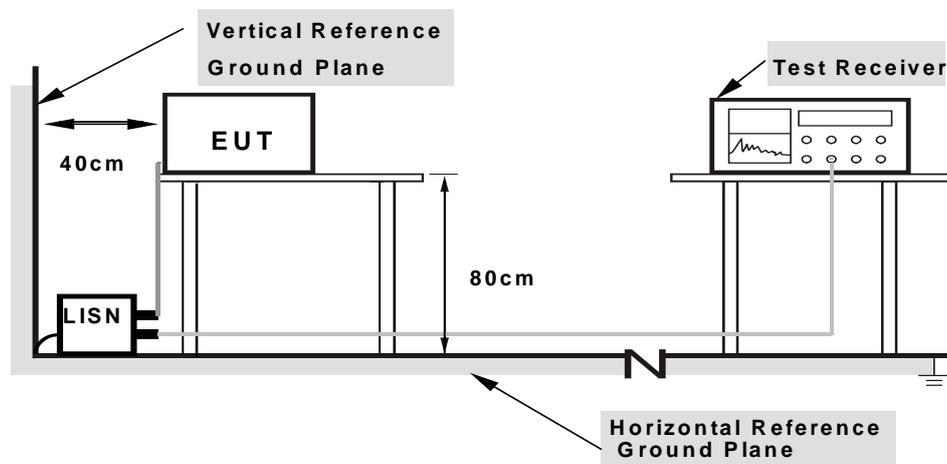

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

#### 4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 21°C Relative Humidity: 51%

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

#### Below 1 GHz

#### Measurement Method and Applied Limits:

#### ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

#### Above 1 GHz

#### Measurement Method and Applied Limits:

#### ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

### FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

#### NOTE:

- (1) The limit for radiated test was performed according to as following: FCC Part 15, Subpart B: 2014;.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).  
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

**4.2.2 TEST PROCEDURE**


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**4.2.3 DEVIATION FROM TEST STANDARD**


No deviation

#### 4.2.4 TEST SETUP

##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

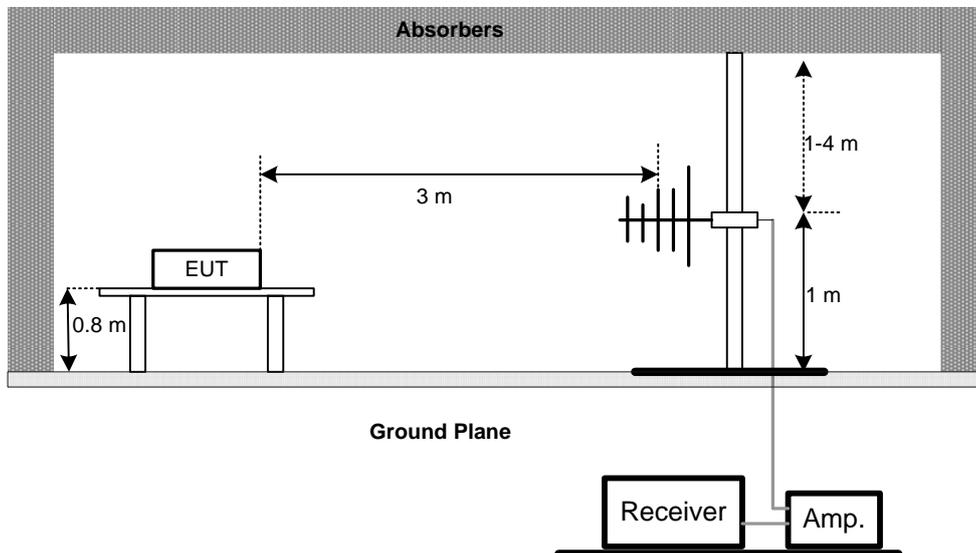

##### (B) Radiated Emission Test Set-Up Frequency Above 1 GHz

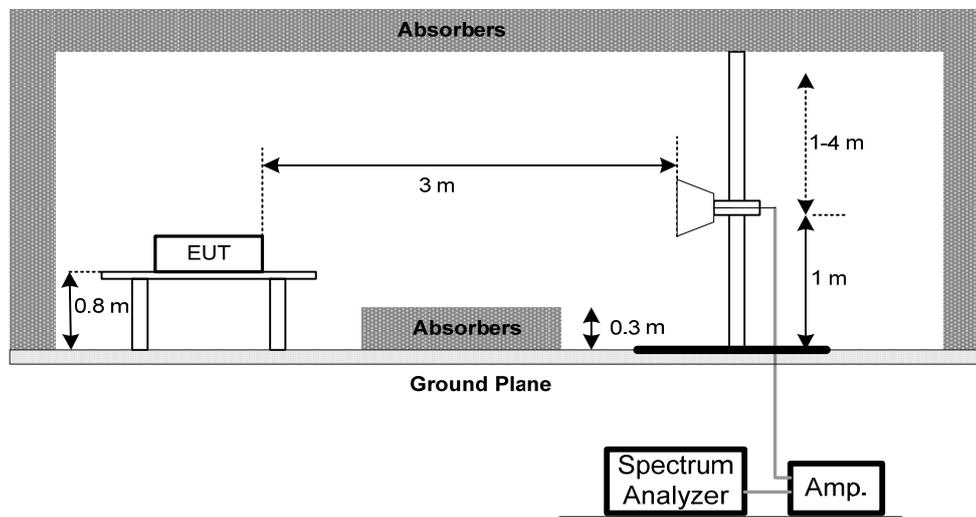

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.2.6 TEST RESULTS (30 TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 28°C Relative Humidity: 60%

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

#### 4.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 28°C Relative Humidity: 60%

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ \* ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

## 5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100087	Nov. 22, 2015
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jul. 08, 2016
2	Pre-Amplifier	Anritsu	MH648A	M92649	Apr. 16, 2016
3	Test Cable	TIMES	LMR-400	12M	May 12, 2016
4	Test Cable	TIMES	LMR-400	3M	May 12, 2016
5	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
6	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jan. 11, 2016
7	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 14, 2016
8	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
9	Microflex Cable	AISI	S104-SMAP-1	10M	May 13, 2016
10	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May 11, 2016
11	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 13, 2015
12	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

## **ATTACHMENT A - CONDUCTED EMISSION**

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


## Line

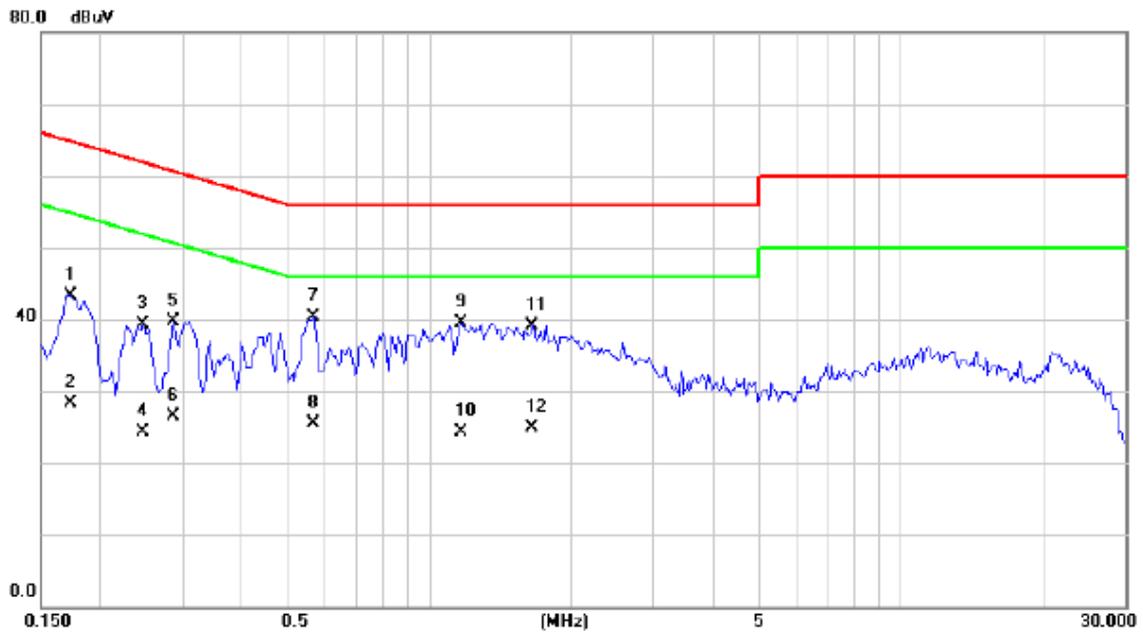

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1734	33.53	9.69	43.22	64.80	-21.58	QP	
2	0.1734	18.60	9.69	28.29	54.80	-26.51	AVG	
3	0.2477	29.62	9.73	39.35	61.83	-22.48	QP	
4	0.2477	14.50	9.73	24.23	51.83	-27.60	AVG	
5	0.2867	30.01	9.75	39.76	60.62	-20.86	QP	
6	0.2867	16.70	9.75	26.45	50.62	-24.17	AVG	
7 *	0.5680	30.50	9.84	40.34	56.00	-15.66	QP	
8	0.5680	15.60	9.84	25.44	46.00	-20.56	AVG	
9	1.1694	29.49	10.01	39.50	56.00	-16.50	QP	
10	1.1694	14.30	10.01	24.31	46.00	-21.69	AVG	
11	1.6617	29.24	9.90	39.14	56.00	-16.86	QP	
12	1.6617	15.10	9.90	25.00	46.00	-21.00	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


## Neutral

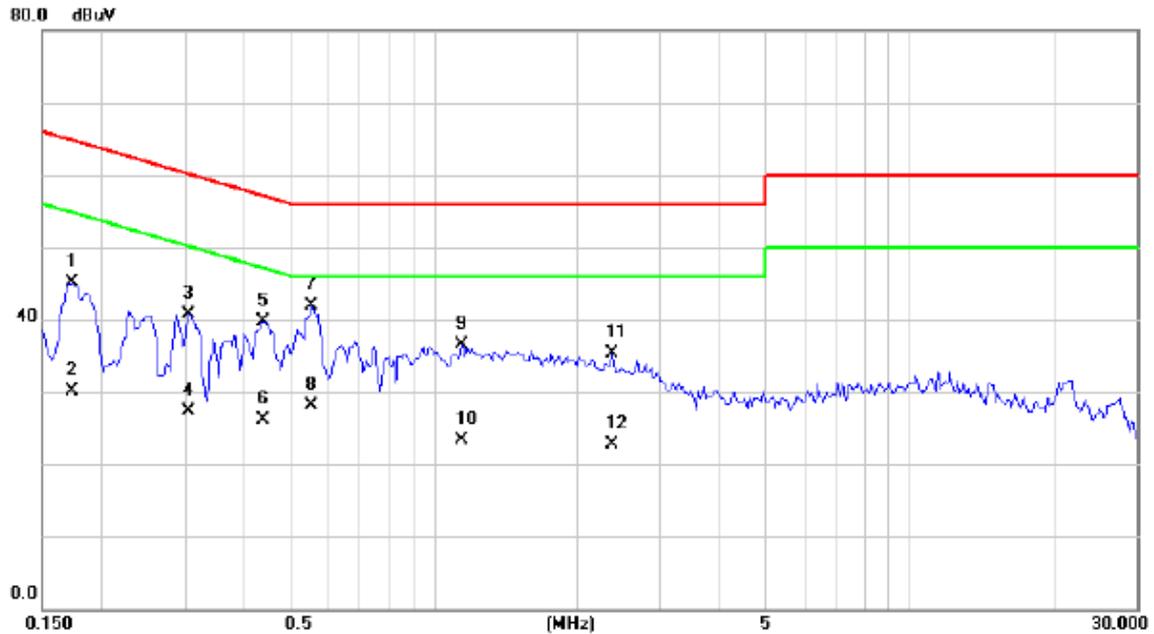

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1734	35.44	9.60	45.04	64.80	-19.76	QP	
2	0.1734	20.50	9.60	30.10	54.80	-24.70	AVG	
3	0.3063	31.10	9.63	40.73	60.07	-19.34	QP	
4	0.3063	17.60	9.63	27.23	50.07	-22.84	AVG	
5	0.4391	30.09	9.64	39.73	57.08	-17.35	QP	
6	0.4391	16.50	9.64	26.14	47.08	-20.94	AVG	
7 *	0.5523	32.23	9.67	41.90	56.00	-14.10	QP	
8	0.5523	18.40	9.67	28.07	46.00	-17.93	AVG	
9	1.1422	26.66	9.80	36.46	56.00	-19.54	QP	
10	1.1422	13.60	9.80	23.40	46.00	-22.60	AVG	
11	2.3687	25.35	9.88	35.23	56.00	-20.77	QP	
12	2.3687	12.80	9.88	22.68	46.00	-23.32	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+nfc+speaker
Note:	Adapter: BYD


## Line

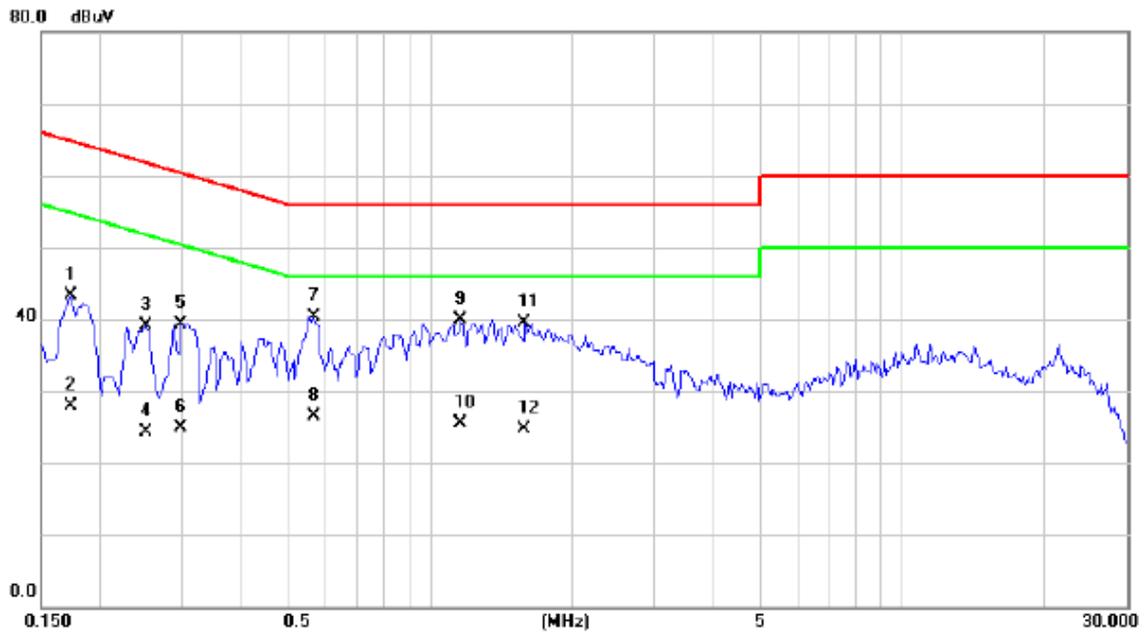

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1734	33.55	9.69	43.24	64.80	-21.56	QP	
2		0.1734	18.30	9.69	27.99	54.80	-26.81	AVG	
3		0.2515	29.31	9.73	39.04	61.71	-22.67	QP	
4		0.2515	14.60	9.73	24.33	51.71	-27.38	AVG	
5		0.2983	29.58	9.76	39.34	60.29	-20.95	QP	
6		0.2983	15.20	9.76	24.96	50.29	-25.33	AVG	
7	*	0.5680	30.48	9.84	40.32	56.00	-15.68	QP	
8		0.5680	16.70	9.84	26.54	46.00	-19.46	AVG	
9		1.1656	29.98	10.01	39.99	56.00	-16.01	QP	
10		1.1656	15.40	10.01	25.41	46.00	-20.59	AVG	
11		1.5914	29.56	9.91	39.47	56.00	-16.53	QP	
12		1.5914	14.80	9.91	24.71	46.00	-21.29	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+nfc+speaker
Note:	Adapter: BYD


### Neutral

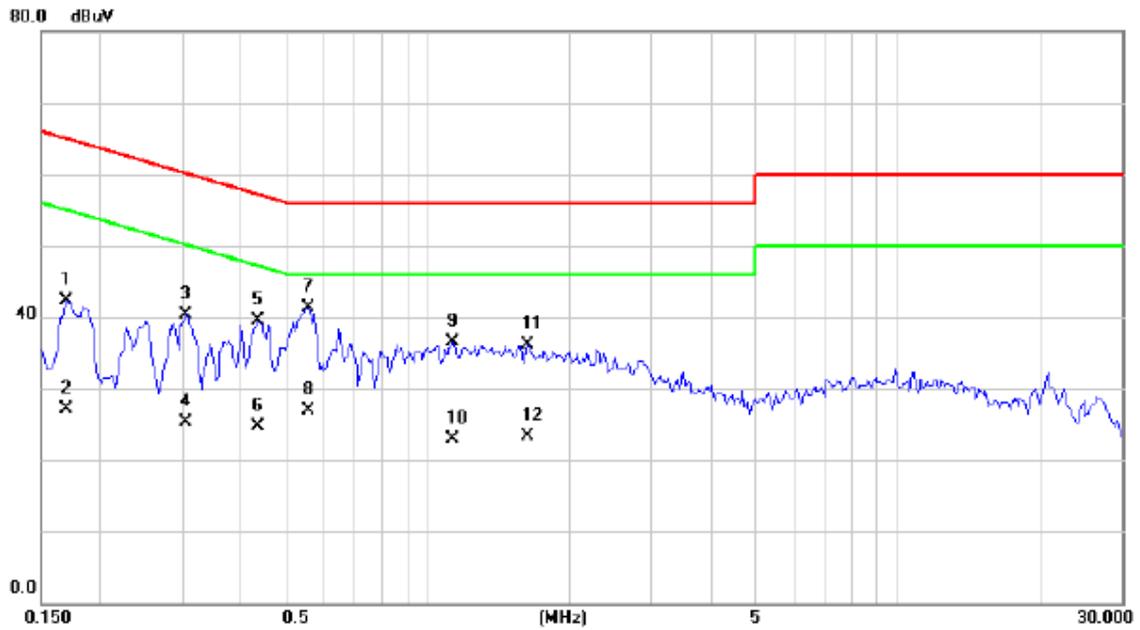

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1695	32.65	9.60	42.25	64.98	-22.73	QP	
2		0.1695	17.60	9.60	27.20	54.98	-27.78	AVG	
3		0.3063	30.72	9.63	40.35	60.07	-19.72	QP	
4		0.3063	15.60	9.63	25.23	50.07	-24.84	AVG	
5		0.4352	29.82	9.64	39.46	57.15	-17.69	QP	
6		0.4352	15.10	9.64	24.74	47.15	-22.41	AVG	
7	*	0.5563	31.60	9.67	41.27	56.00	-14.73	QP	
8		0.5563	17.30	9.67	26.97	46.00	-19.03	AVG	
9		1.1344	26.64	9.80	36.44	56.00	-19.56	QP	
10		1.1344	13.20	9.80	23.00	46.00	-23.00	AVG	
11		1.6305	26.17	9.85	36.02	56.00	-19.98	QP	
12		1.6305	13.50	9.85	23.35	46.00	-22.65	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


## Line

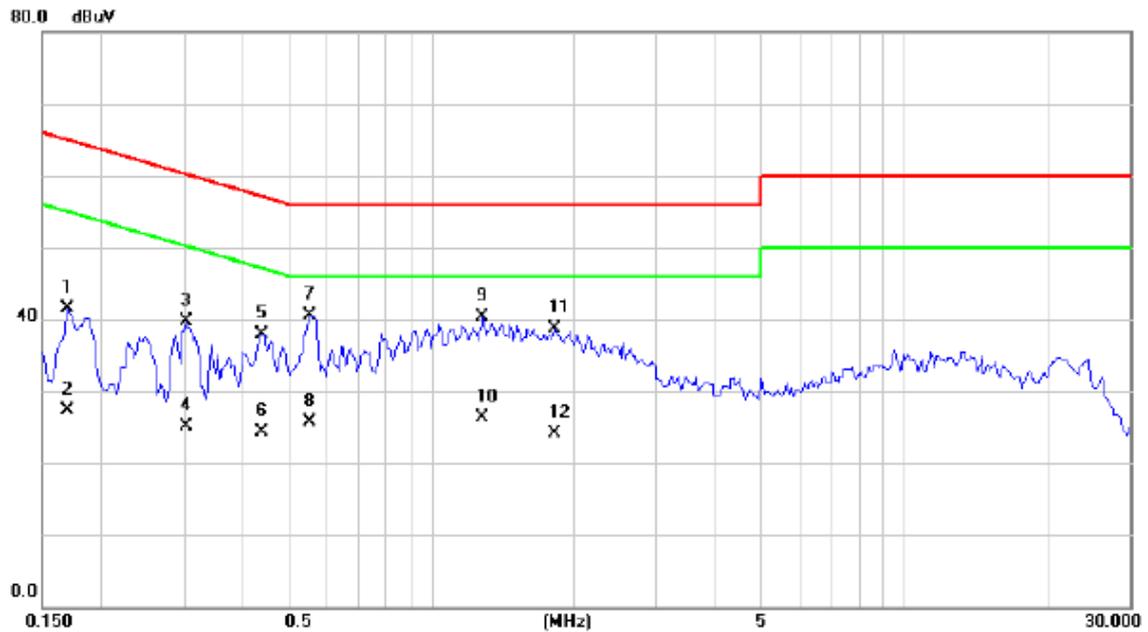

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1695	31.73	9.69	41.42	64.98	-23.56	QP	
2		0.1695	17.60	9.69	27.29	54.98	-27.69	AVG	
3		0.3023	29.96	9.76	39.72	60.18	-20.46	QP	
4		0.3023	15.40	9.76	25.16	50.18	-25.02	AVG	
5		0.4352	28.08	9.81	37.89	57.15	-19.26	QP	
6		0.4352	14.50	9.81	24.31	47.15	-22.84	AVG	
7	*	0.5523	30.60	9.84	40.44	56.00	-15.56	QP	
8		0.5523	15.90	9.84	25.74	46.00	-20.26	AVG	
9		1.2867	30.32	10.00	40.32	56.00	-15.68	QP	
10		1.2867	16.30	10.00	26.30	46.00	-19.70	AVG	
11		1.8258	28.78	9.88	38.66	56.00	-17.34	QP	
12		1.8258	14.20	9.88	24.08	46.00	-21.92	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


### Neutral

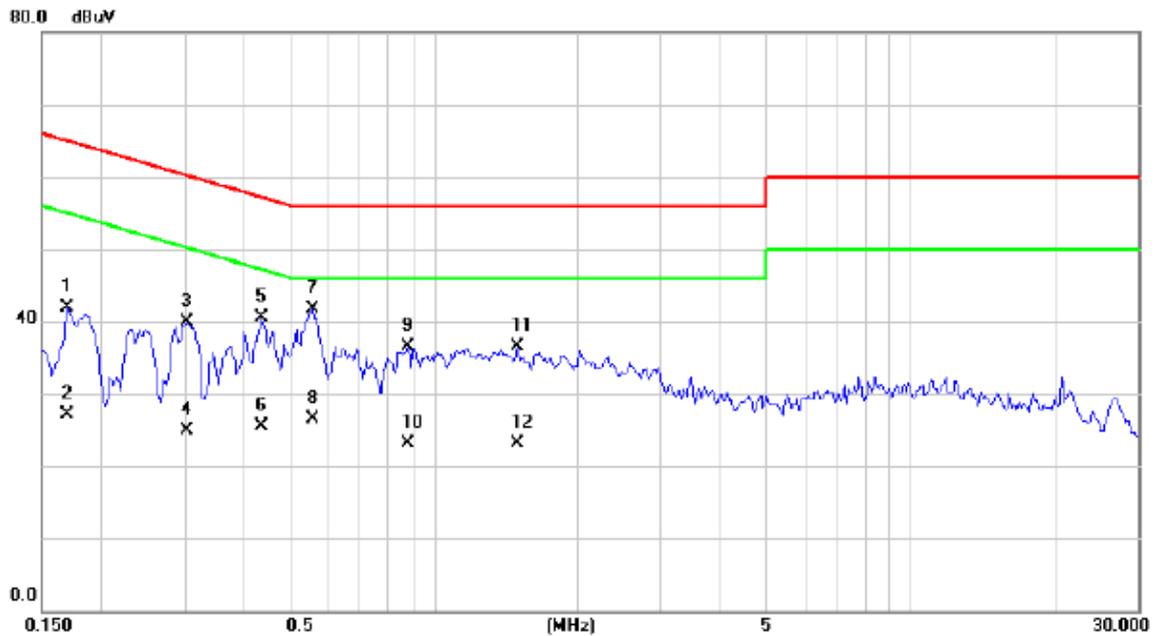

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1695	32.30	9.60	41.90	64.98	-23.08	QP	
2	0.1695	17.50	9.60	27.10	54.98	-27.88	AVG	
3	0.3023	30.37	9.63	40.00	60.18	-20.18	QP	
4	0.3023	15.30	9.63	24.93	50.18	-25.25	AVG	
5	0.4351	30.86	9.64	40.50	57.15	-16.65	QP	
6	0.4351	15.80	9.64	25.44	47.15	-21.71	AVG	
7 *	0.5562	31.99	9.67	41.66	56.00	-14.34	QP	
8	0.5562	16.90	9.67	26.57	46.00	-19.43	AVG	
9	0.8843	26.66	9.75	36.41	56.00	-19.59	QP	
10	0.8843	13.40	9.75	23.15	46.00	-22.85	AVG	
11	1.4976	26.60	9.82	36.42	56.00	-19.58	QP	
12	1.4976	13.20	9.82	23.02	46.00	-22.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


## Line

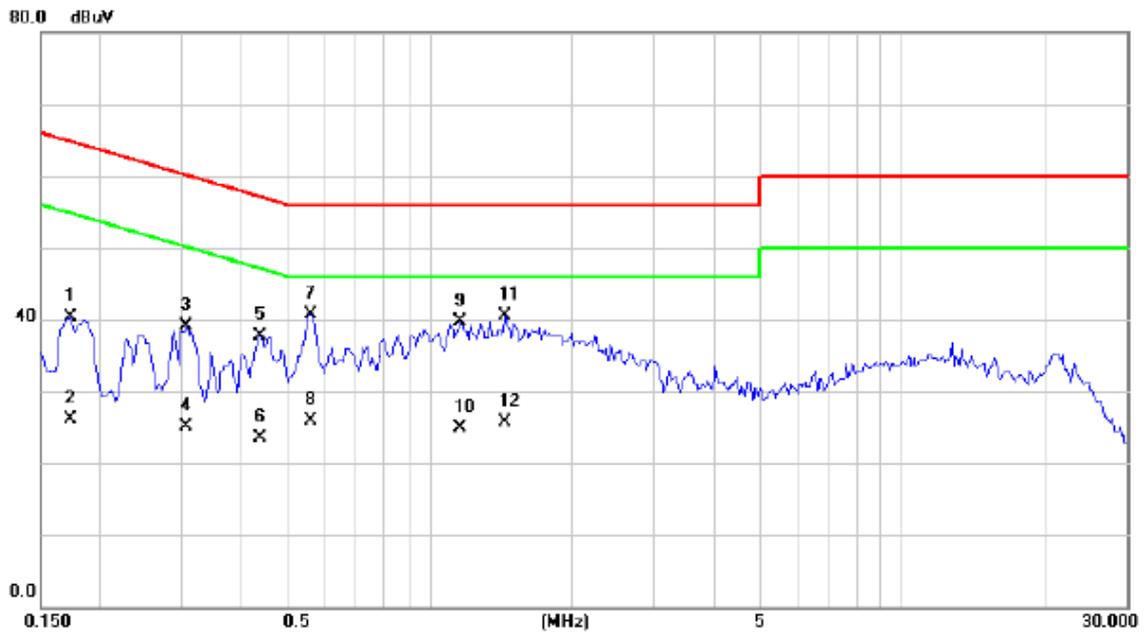

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1734	30.55	9.69	40.24	64.80	-24.56	QP	
2		0.1734	16.40	9.69	26.09	54.80	-28.71	AVG	
3		0.3063	29.27	9.76	39.03	60.07	-21.04	QP	
4		0.3063	15.30	9.76	25.06	50.07	-25.01	AVG	
5		0.4391	27.82	9.81	37.63	57.08	-19.45	QP	
6		0.4391	13.70	9.81	23.51	47.08	-23.57	AVG	
7	*	0.5602	30.87	9.84	40.71	56.00	-15.29	QP	
8		0.5602	16.10	9.84	25.94	46.00	-20.06	AVG	
9		1.1617	29.74	10.01	39.75	56.00	-16.25	QP	
10		1.1617	14.80	10.01	24.81	46.00	-21.19	AVG	
11		1.4470	30.48	9.94	40.42	56.00	-15.58	QP	
12		1.4470	15.70	9.94	25.64	46.00	-20.36	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


## Neutral

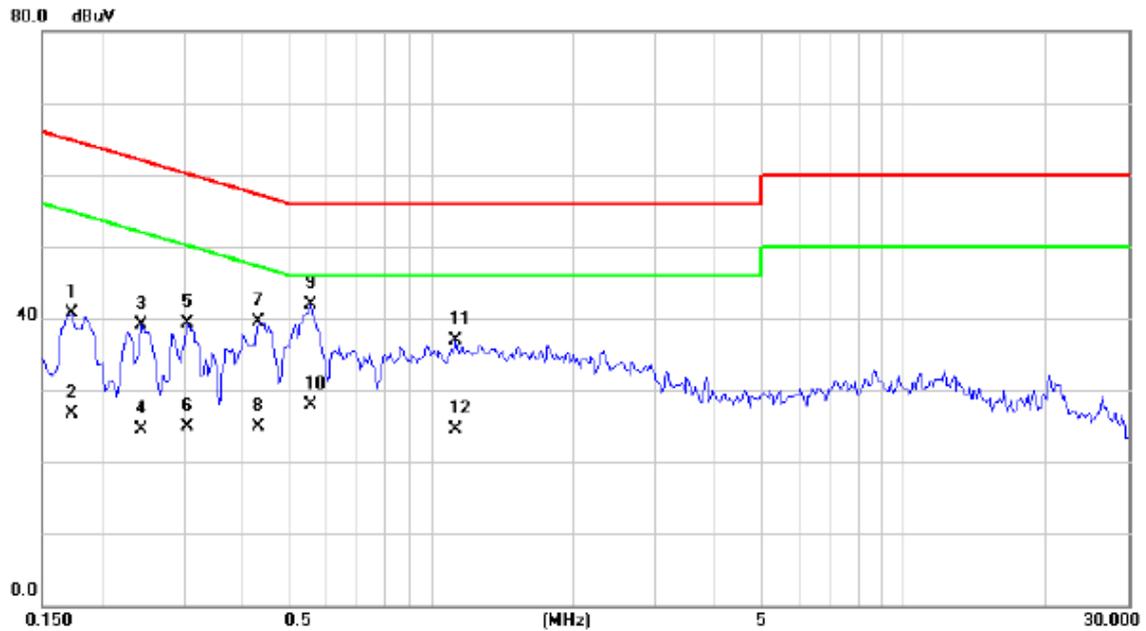

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1734	31.02	9.60	40.62	64.80	-24.18	QP	
2		0.1734	17.20	9.60	26.80	54.80	-28.00	AVG	
3		0.2437	29.46	9.62	39.08	61.97	-22.89	QP	
4		0.2437	14.80	9.62	24.42	51.97	-27.55	AVG	
5		0.3063	29.60	9.63	39.23	60.07	-20.84	QP	
6		0.3063	15.30	9.63	24.93	50.07	-25.14	AVG	
7		0.4313	29.84	9.64	39.48	57.23	-17.75	QP	
8		0.4313	15.20	9.64	24.84	47.23	-22.39	AVG	
9	*	0.5563	32.19	9.67	41.86	56.00	-14.14	QP	
10		0.5563	18.20	9.67	27.87	46.00	-18.13	AVG	
11		1.1305	27.12	9.80	36.92	56.00	-19.08	QP	
12		1.1305	14.70	9.80	24.50	46.00	-21.50	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


### Line

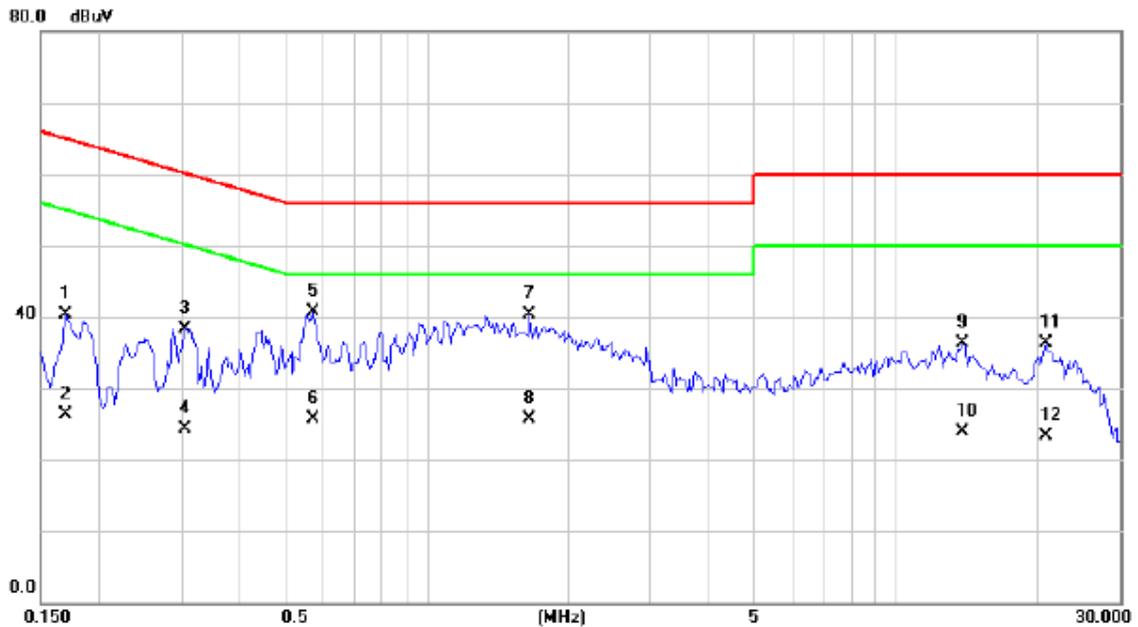

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1695	30.66	9.69	40.35	64.98	-24.63	QP	
2		0.1695	16.70	9.69	26.39	54.98	-28.59	AVG	
3		0.3063	28.50	9.76	38.26	60.07	-21.81	QP	
4		0.3063	14.50	9.76	24.26	50.07	-25.81	AVG	
5	*	0.5720	30.77	9.84	40.61	56.00	-15.39	QP	
6		0.5720	15.90	9.84	25.74	46.00	-20.26	AVG	
7		1.6500	30.48	9.90	40.38	56.00	-15.62	QP	
8		1.6500	15.80	9.90	25.70	46.00	-20.30	AVG	
9		13.8750	26.09	10.23	36.32	60.00	-23.68	QP	
10		13.8750	13.70	10.23	23.93	50.00	-26.07	AVG	
11		20.8320	25.84	10.39	36.23	60.00	-23.77	QP	
12		20.8320	12.90	10.39	23.29	50.00	-26.71	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


### Neutral

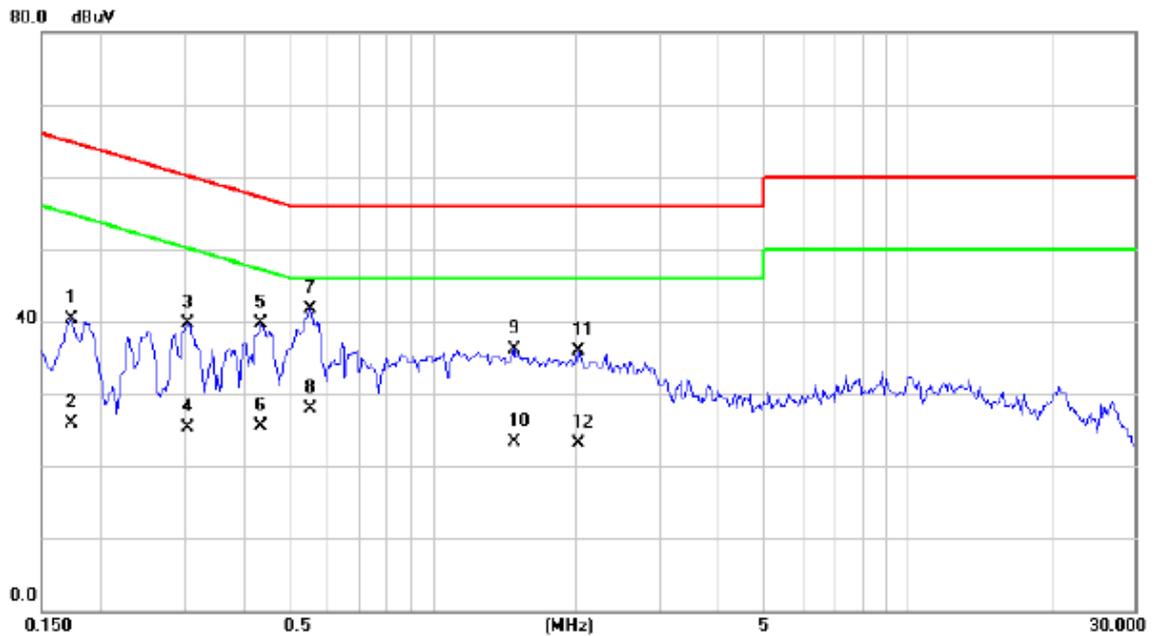

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1734	30.76	9.60	40.36	64.80	-24.44	QP	
2		0.1734	16.30	9.60	25.90	54.80	-28.90	AVG	
3		0.3063	30.17	9.63	39.80	60.07	-20.27	QP	
4		0.3063	15.70	9.63	25.33	50.07	-24.74	AVG	
5		0.4352	30.13	9.64	39.77	57.15	-17.38	QP	
6		0.4352	15.90	9.64	25.54	47.15	-21.61	AVG	
7	*	0.5523	32.03	9.67	41.70	56.00	-14.30	QP	
8		0.5523	18.20	9.67	27.87	46.00	-18.13	AVG	
9		1.4820	26.38	9.82	36.20	56.00	-19.80	QP	
10		1.4820	13.40	9.82	23.22	46.00	-22.78	AVG	
11		2.0288	26.01	9.92	35.93	56.00	-20.07	QP	
12		2.0288	13.20	9.92	23.12	46.00	-22.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle


### Line

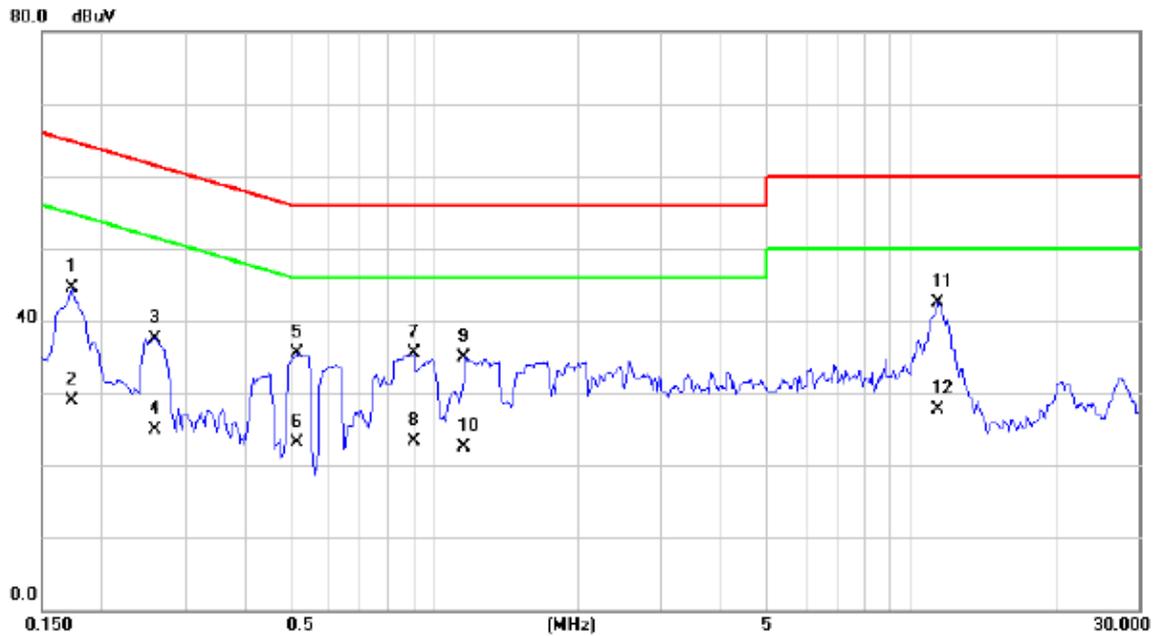

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1734	34.81	9.69	44.50	64.80	-20.30	QP	
2	0.1734	19.30	9.69	28.99	54.80	-25.81	AVG	
3	0.2593	27.84	9.74	37.58	61.45	-23.87	QP	
4	0.2593	15.10	9.74	24.84	51.45	-26.61	AVG	
5	0.5171	25.69	9.82	35.51	56.00	-20.49	QP	
6	0.5171	13.20	9.82	23.02	46.00	-22.98	AVG	
7	0.9078	25.49	9.95	35.44	56.00	-20.56	QP	
8	0.9078	13.40	9.95	23.35	46.00	-22.65	AVG	
9	1.1578	24.84	10.01	34.85	56.00	-21.15	QP	
10	1.1578	12.50	10.01	22.51	46.00	-23.49	AVG	
11 *	11.4217	32.36	10.12	42.48	60.00	-17.52	QP	
12	11.4217	17.60	10.12	27.72	50.00	-22.28	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle


## Neutral

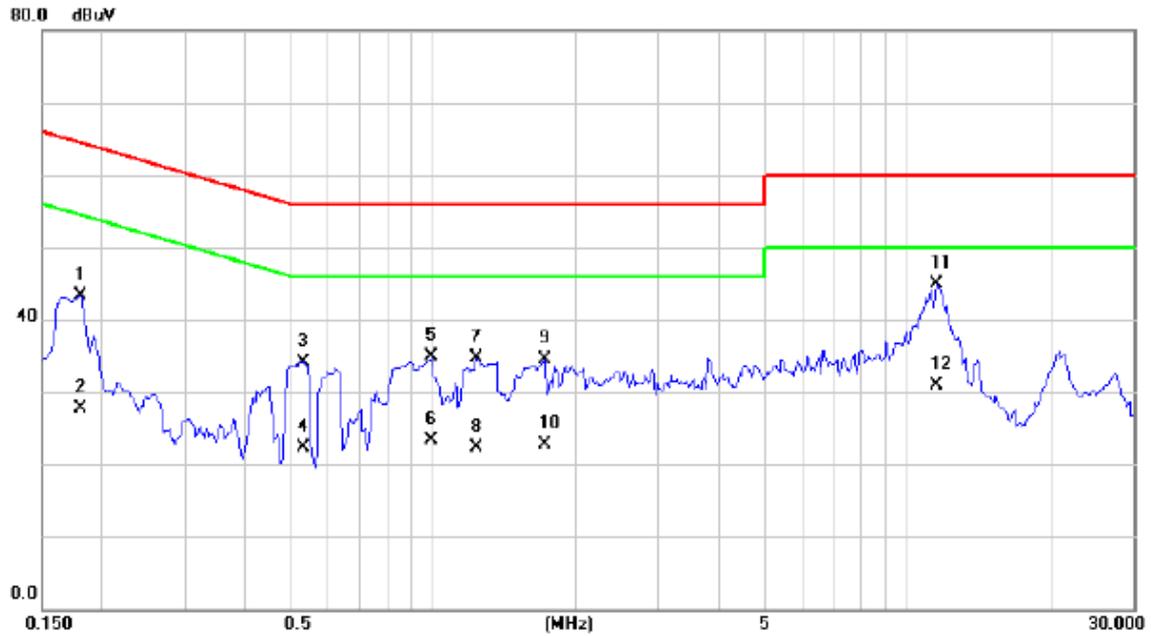

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1812	33.77	9.60	43.37	64.43	-21.06	QP	
2		0.1812	18.10	9.60	27.70	54.43	-26.73	AVG	
3		0.5328	24.49	9.66	34.15	56.00	-21.85	QP	
4		0.5328	12.70	9.66	22.36	46.00	-23.64	AVG	
5		0.9977	25.19	9.79	34.98	56.00	-21.02	QP	
6		0.9977	13.50	9.79	23.29	46.00	-22.71	AVG	
7		1.2398	24.84	9.80	34.64	56.00	-21.36	QP	
8		1.2398	12.60	9.80	22.40	46.00	-23.60	AVG	
9		1.7242	24.56	9.86	34.42	56.00	-21.58	QP	
10		1.7242	12.80	9.86	22.66	46.00	-23.34	AVG	
11	*	11.5000	34.80	10.11	44.91	60.00	-15.09	QP	
12		11.5000	20.80	10.11	30.91	50.00	-19.09	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


### Line

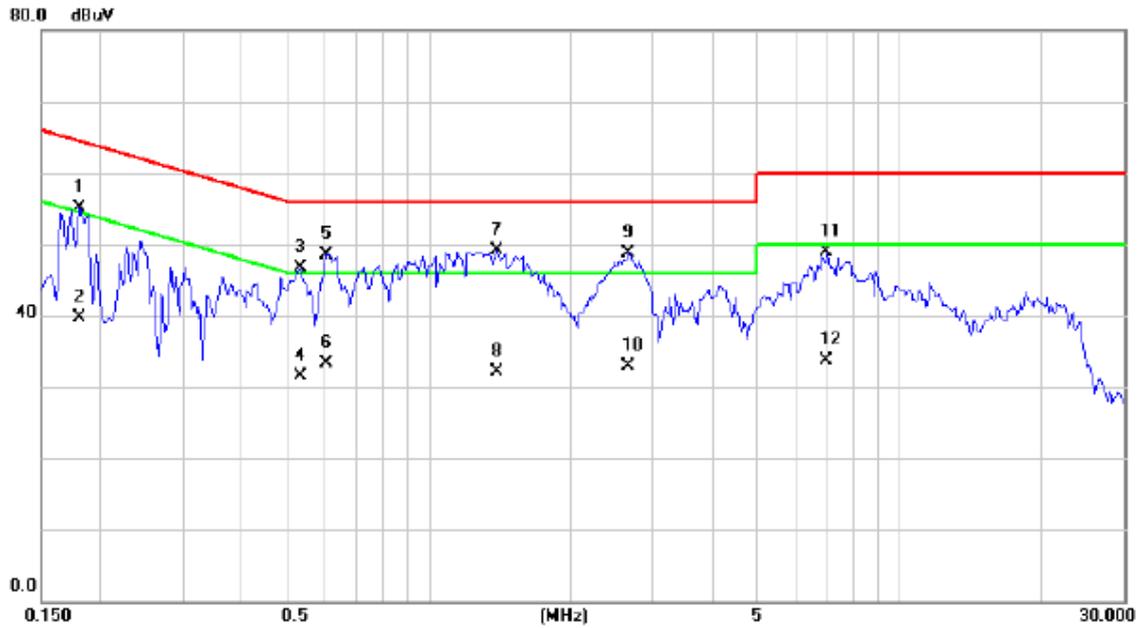

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1812	45.31	9.70	55.01	64.43	-9.42	QP	
2		0.1812	30.10	9.70	39.80	54.43	-14.63	AVG	
3		0.5328	36.91	9.84	46.75	56.00	-9.25	QP	
4		0.5328	21.60	9.84	31.44	46.00	-14.56	AVG	
5		0.6070	38.66	9.86	48.52	56.00	-7.48	QP	
6		0.6070	23.50	9.86	33.36	46.00	-12.64	AVG	
7	*	1.3922	39.12	9.96	49.08	56.00	-6.92	QP	
8		1.3922	22.10	9.96	32.06	46.00	-13.94	AVG	
9		2.6617	38.73	9.91	48.64	56.00	-7.36	QP	
10		2.6617	22.90	9.91	32.81	46.00	-13.19	AVG	
11		7.0000	38.94	9.97	48.91	60.00	-11.09	QP	
12		7.0000	23.70	9.97	33.67	50.00	-16.33	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


### Neutral

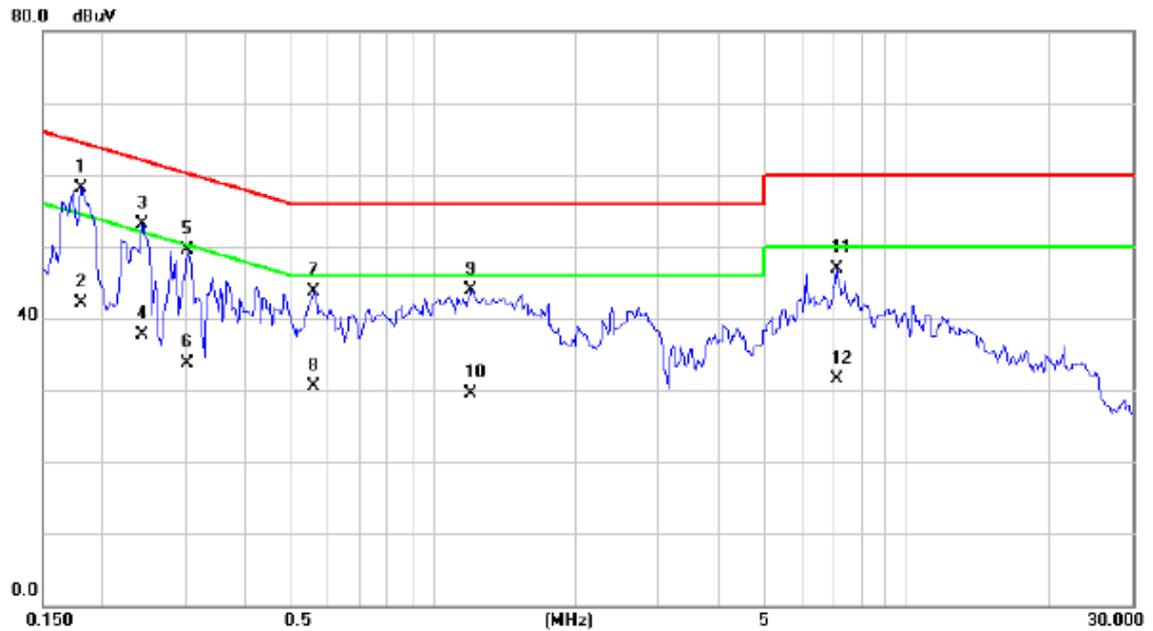

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1812	48.45	9.60	58.05	64.43	-6.38	QP	
2		0.1812	32.50	9.60	42.10	54.43	-12.33	AVG	
3		0.2437	43.46	9.62	53.08	61.97	-8.89	QP	
4		0.2437	28.10	9.62	37.72	51.97	-14.25	AVG	
5		0.3023	39.83	9.63	49.46	60.18	-10.72	QP	
6		0.3023	24.10	9.63	33.73	50.18	-16.45	AVG	
7		0.5602	34.01	9.67	43.68	56.00	-12.32	QP	
8		0.5602	20.90	9.67	30.57	46.00	-15.43	AVG	
9		1.2086	34.13	9.80	43.93	56.00	-12.07	QP	
10		1.2086	19.70	9.80	29.50	46.00	-16.50	AVG	
11		7.1250	36.77	10.14	46.91	60.00	-13.09	QP	
12		7.1250	21.30	10.14	31.44	50.00	-18.56	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


### Line

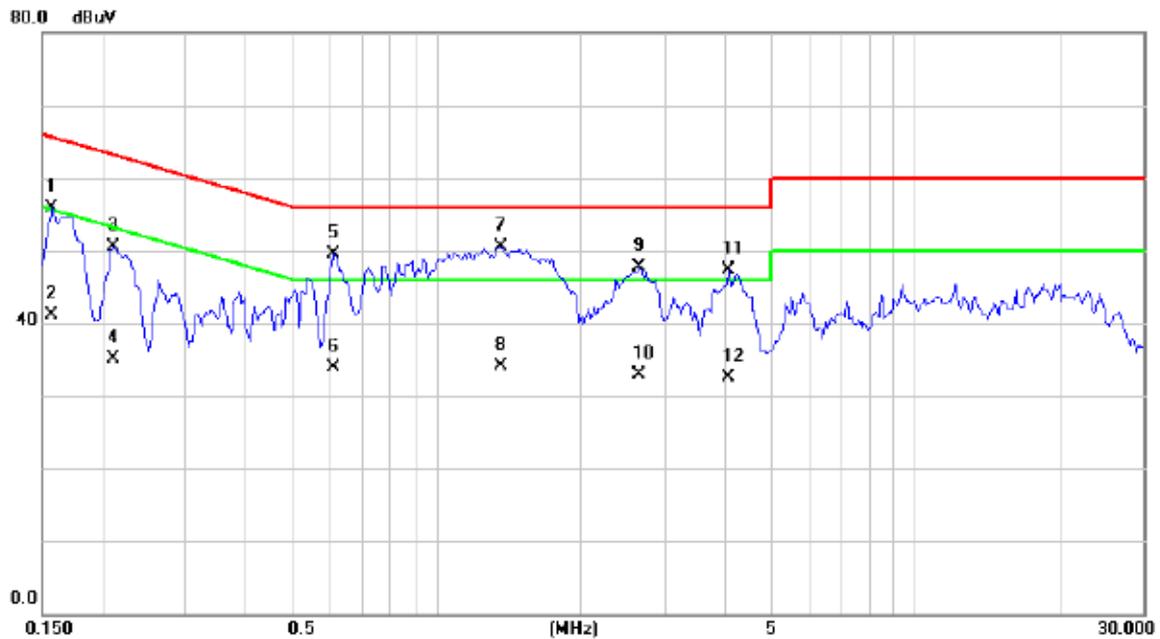

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1578	46.16	9.68	55.84	65.58	-9.74	QP	
2	0.1578	31.50	9.68	41.18	55.58	-14.40	AVG	
3	0.2125	40.87	9.71	50.58	63.11	-12.53	QP	
4	0.2125	25.40	9.71	35.11	53.11	-18.00	AVG	
5	0.6110	39.56	9.86	49.42	56.00	-6.58	QP	
6	0.6110	24.00	9.86	33.86	46.00	-12.14	AVG	
7 *	1.3727	40.51	9.97	50.48	56.00	-5.52	QP	
8	1.3727	24.20	9.97	34.17	46.00	-11.83	AVG	
9	2.6617	37.73	9.91	47.64	56.00	-8.36	QP	
10	2.6617	22.90	9.91	32.81	46.00	-13.19	AVG	
11	4.0898	37.56	9.79	47.35	56.00	-8.65	QP	
12	4.0898	22.80	9.79	32.59	46.00	-13.41	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


## Neutral

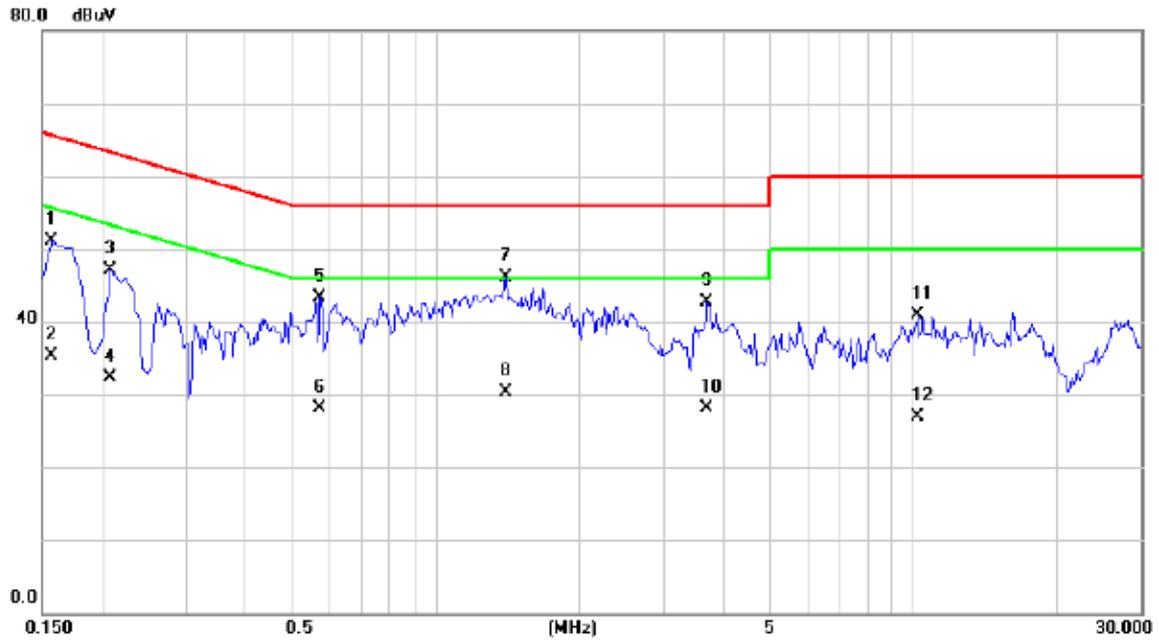

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1578	41.60	9.59	51.19	65.58	-14.39	QP	
2	0.1578	25.70	9.59	35.29	55.58	-20.29	AVG	
3	0.2086	37.59	9.61	47.20	63.26	-16.06	QP	
4	0.2086	22.60	9.61	32.21	53.26	-21.05	AVG	
5	0.5757	33.58	9.67	43.25	56.00	-12.75	QP	
6	0.5757	18.40	9.67	28.07	46.00	-17.93	AVG	
7 *	1.4040	36.25	9.82	46.07	56.00	-9.93	QP	
8	1.4040	20.50	9.82	30.32	46.00	-15.68	AVG	
9	3.7110	32.80	9.93	42.73	56.00	-13.27	QP	
10	3.7110	18.10	9.93	28.03	46.00	-17.97	AVG	
11	10.2344	30.94	10.05	40.99	60.00	-19.01	QP	
12	10.2344	16.80	10.05	26.85	50.00	-23.15	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


### Line

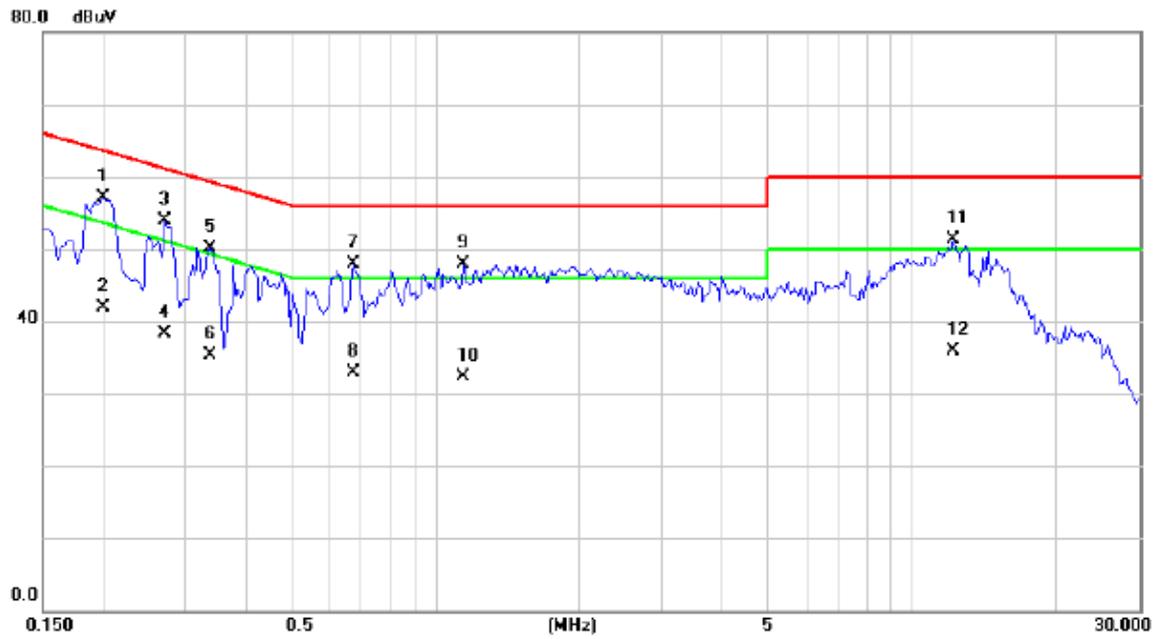

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.2008	47.47	9.71	57.18	63.58	-6.40	QP	
2		0.2008	32.10	9.71	41.81	53.58	-11.77	AVG	
3		0.2711	44.10	9.74	53.84	61.08	-7.24	QP	
4		0.2711	28.60	9.74	38.34	51.08	-12.74	AVG	
5		0.3375	40.27	9.77	50.04	59.26	-9.22	QP	
6		0.3375	25.60	9.77	35.37	49.26	-13.89	AVG	
7		0.6734	37.97	9.89	47.86	56.00	-8.14	QP	
8		0.6734	23.10	9.89	32.99	46.00	-13.01	AVG	
9		1.1461	37.93	10.01	47.94	56.00	-8.06	QP	
10		1.1461	22.30	10.01	32.31	46.00	-13.69	AVG	
11		12.2070	41.11	10.15	51.26	60.00	-8.74	QP	
12		12.2070	25.70	10.15	35.85	50.00	-14.15	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG

## Neutral

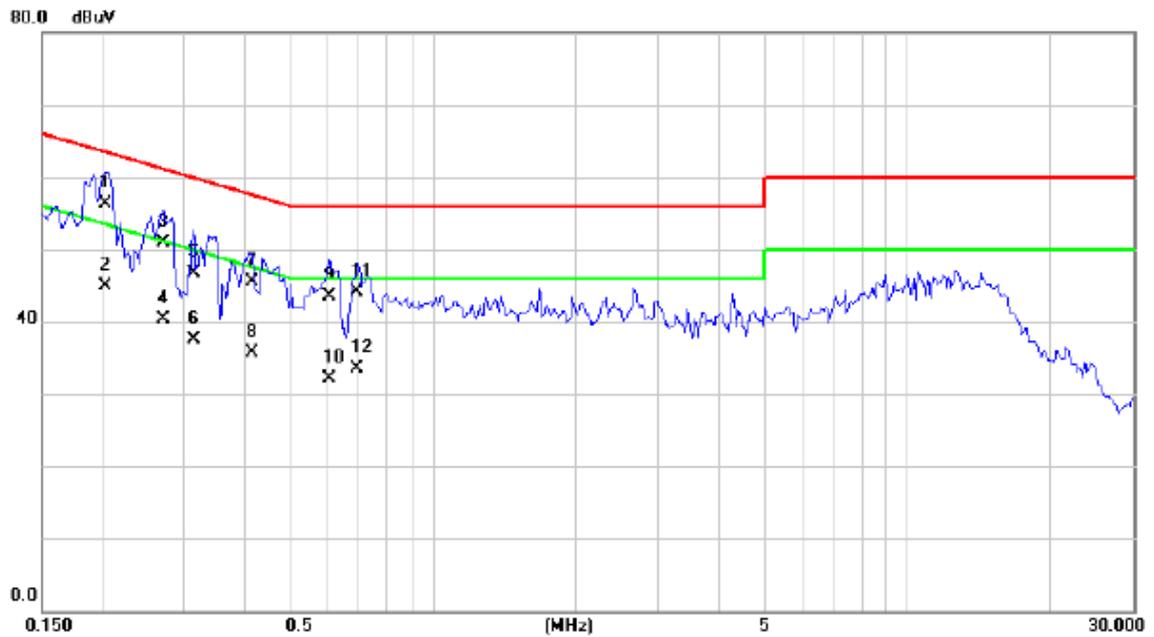


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment	dBuV	dB	Detector	Comment
1	*	0.2047	46.70	9.61	56.31	63.42	-7.11	QP	
2		0.2047	35.30	9.61	44.91	53.42	-8.51	AVG	
3		0.2711	41.30	9.62	50.92	61.08	-10.16	QP	
4		0.2711	30.60	9.62	40.22	51.08	-10.86	AVG	
5		0.3141	37.10	9.63	46.73	59.86	-13.13	QP	
6		0.3141	27.90	9.63	37.53	49.86	-12.33	AVG	
7		0.4156	35.80	9.63	45.43	57.54	-12.11	QP	
8		0.4156	26.10	9.63	35.73	47.54	-11.81	AVG	
9		0.6070	33.90	9.68	43.58	56.00	-12.42	QP	
10		0.6070	22.50	9.68	32.18	46.00	-13.82	AVG	
11		0.6970	34.40	9.69	44.09	56.00	-11.91	QP	
12		0.6970	23.90	9.69	33.59	46.00	-12.41	AVG	

**ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)**

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


## Vertical

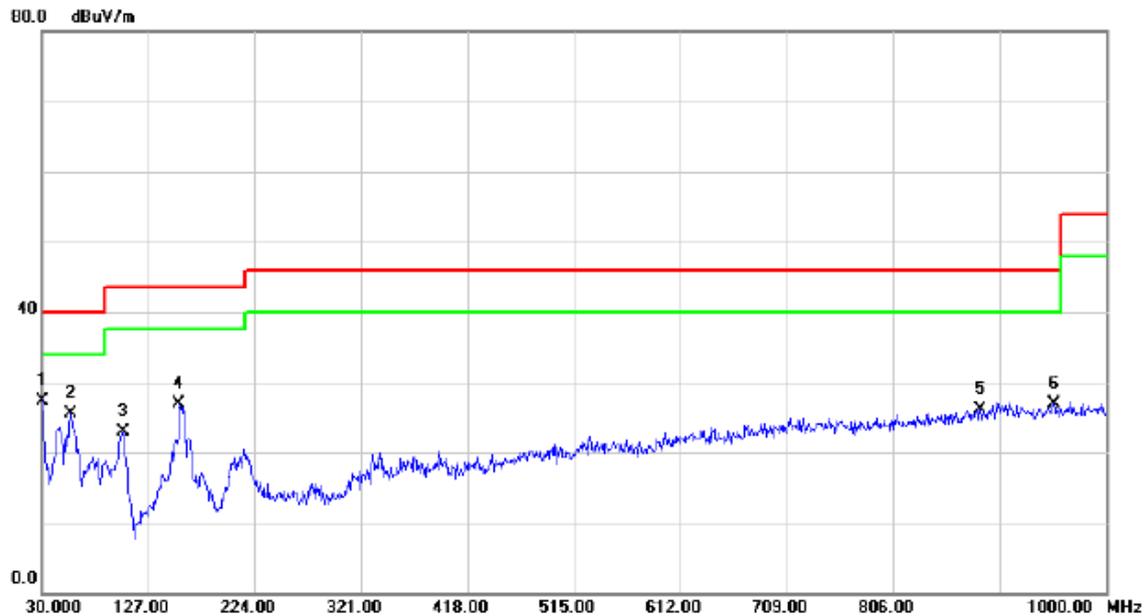

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	37.29	-9.96	27.33	40.00	-12.67	QP	
2		56.5000	44.94	-19.38	25.56	40.00	-14.44	QP	
3		104.0000	41.55	-18.70	22.85	43.50	-20.65	QP	
4		156.0000	44.04	-17.17	26.87	43.50	-16.63	QP	
5		886.0000	25.52	0.53	26.05	46.00	-19.95	QP	
6		953.0000	25.66	1.27	26.93	46.00	-19.07	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD

## Horizontal

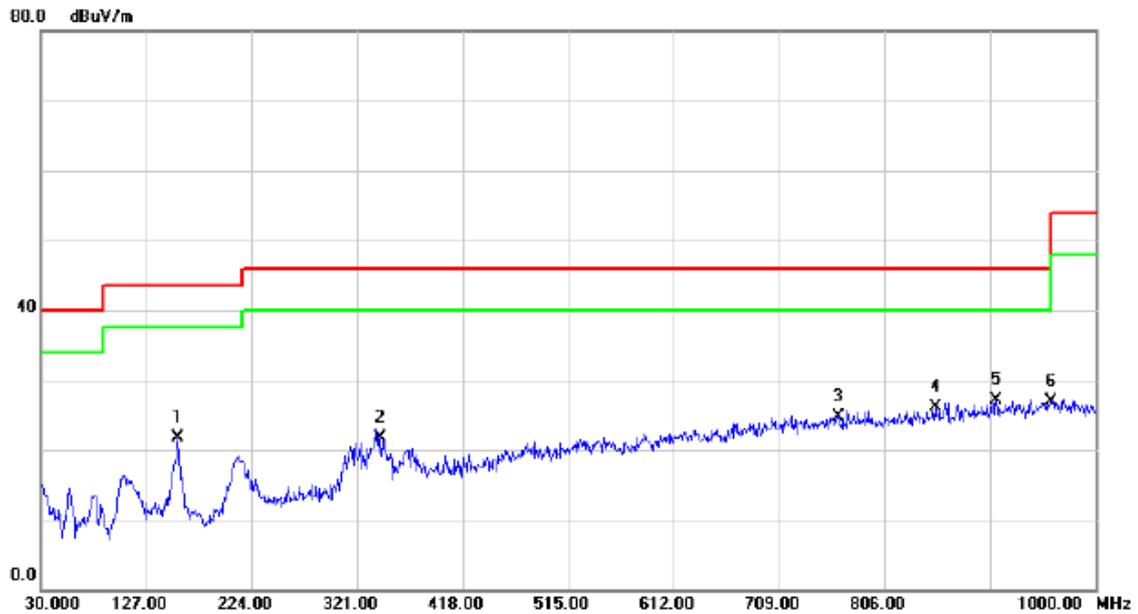

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		156.5000	38.84	-17.12	21.72	43.50	-21.78	QP	
2		343.0000	31.16	-9.55	21.61	46.00	-24.39	QP	
3		763.0000	26.13	-1.43	24.70	46.00	-21.30	QP	
4		853.0000	26.33	-0.15	26.18	46.00	-19.82	QP	
5	*	909.5000	26.08	0.99	27.07	46.00	-18.93	QP	
6		959.5000	25.54	1.32	26.86	46.00	-19.14	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+nfc+speaker
Note:	Adapter: BYD


### Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	47.89	-13.92	33.97	40.00	-6.03	QP	
2		67.8300	40.88	-15.93	24.95	40.00	-15.05	QP	
3		129.9100	37.61	-15.31	22.30	43.50	-21.20	QP	
4		304.5100	37.20	-13.37	23.83	46.00	-22.17	QP	
5		749.7400	36.89	-5.01	31.88	46.00	-14.12	QP	
6		891.3600	38.34	-3.00	35.34	46.00	-10.66	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+nfc+speaker
Note:	Adapter: BYD


## Horizontal

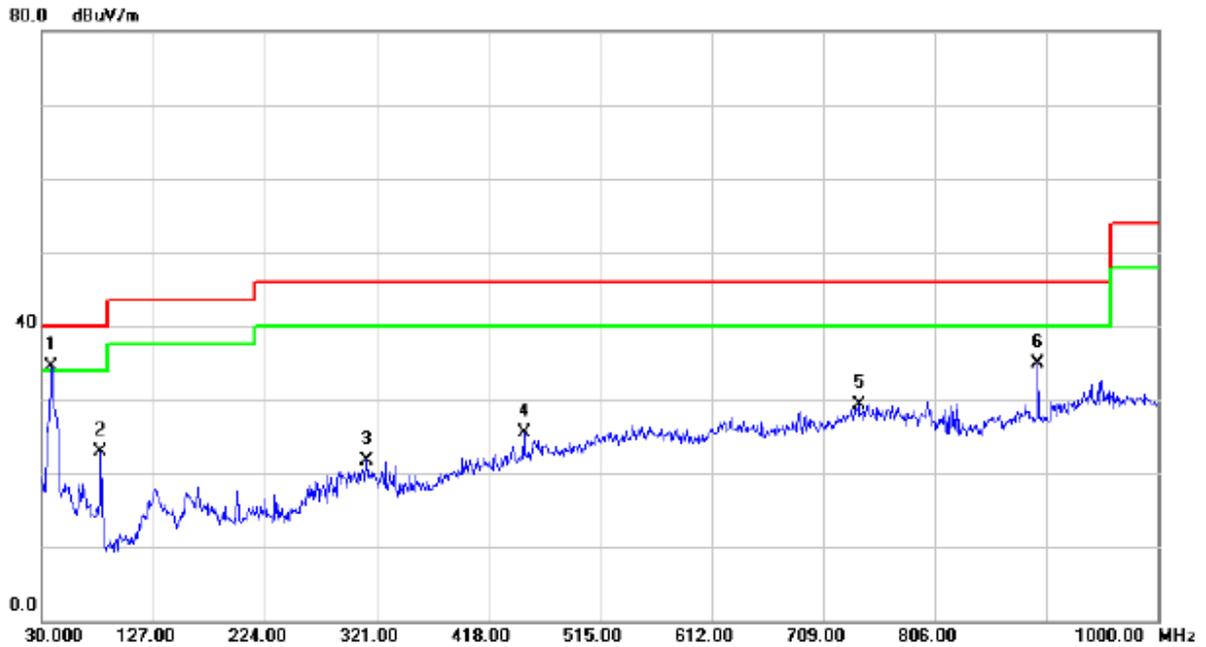

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	48.95	-14.44	34.51	40.00	-5.49	QP	
2		81.4100	41.23	-18.42	22.81	40.00	-17.19	QP	
3		312.2700	34.95	-13.15	21.80	46.00	-24.20	QP	
4		449.0400	35.12	-9.68	25.44	46.00	-20.56	QP	
5		740.0400	34.43	-5.09	29.34	46.00	-16.66	QP	
6		896.2100	37.75	-2.90	34.85	46.00	-11.15	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


### Vertical

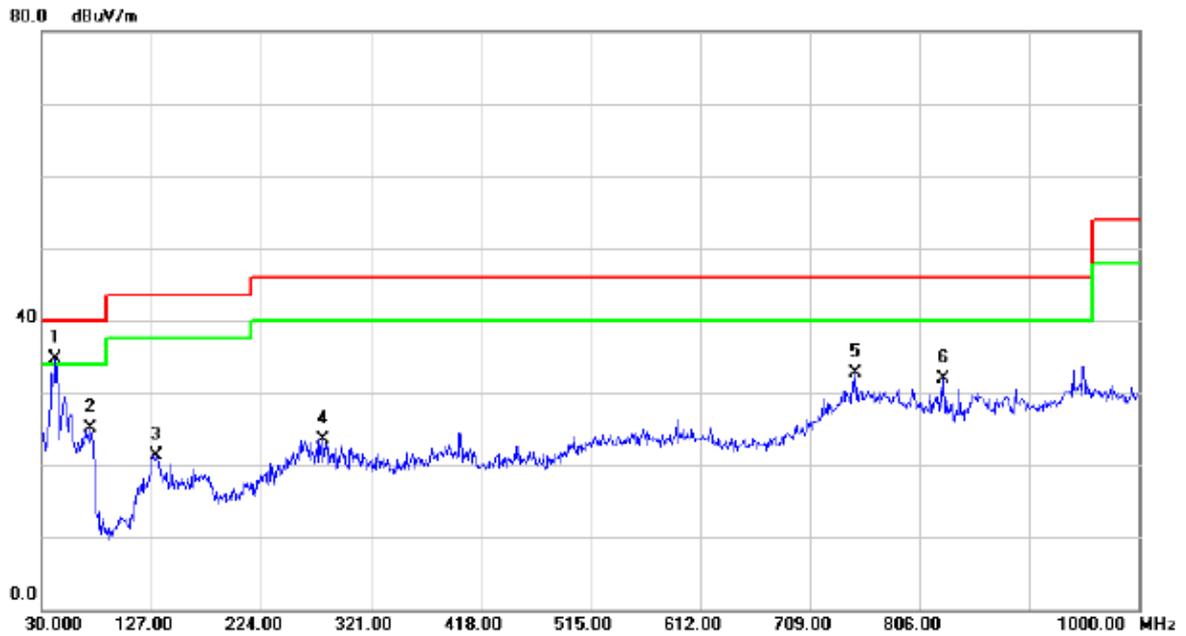

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	48.53	-13.92	34.61	40.00	-5.39	QP	
2		73.6500	42.11	-16.93	25.18	40.00	-14.82	QP	
3		130.8800	36.50	-15.23	21.27	43.50	-22.23	QP	
4		279.2900	37.41	-13.98	23.43	46.00	-22.57	QP	
5		749.7400	37.64	-5.01	32.63	46.00	-13.37	QP	
6		827.3400	36.11	-4.25	31.86	46.00	-14.14	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


## Horizontal

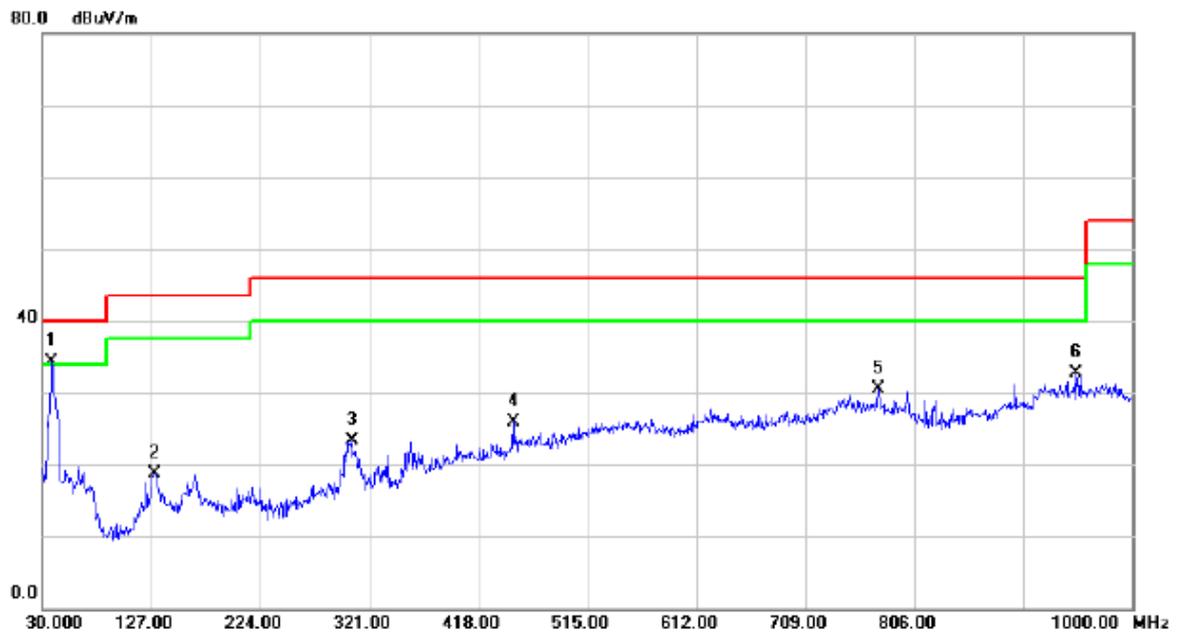

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	48.66	-14.44	34.22	40.00	-5.78	QP	
2		129.9100	34.11	-15.31	18.80	43.50	-24.70	QP	
3		305.4800	36.58	-13.34	23.24	46.00	-22.76	QP	
4		449.0400	35.68	-9.68	26.00	46.00	-20.00	QP	
5		773.9900	35.47	-4.88	30.59	46.00	-15.41	QP	
6		950.5300	34.51	-1.75	32.76	46.00	-13.24	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


### Vertical

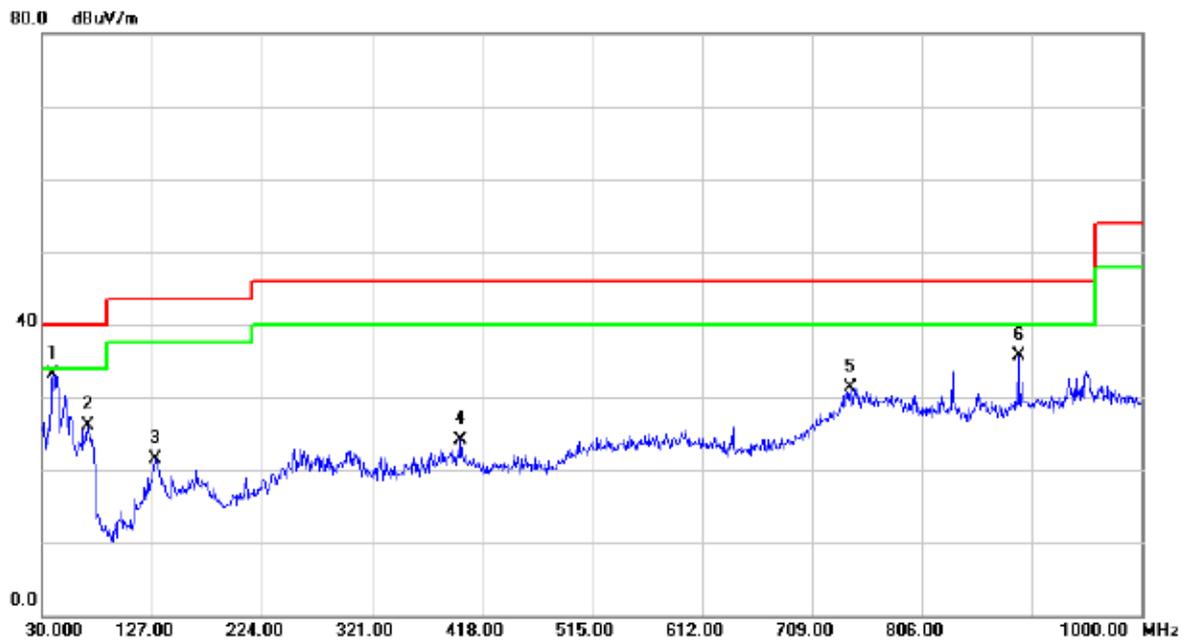

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39.7000	47.36	-14.25	33.11	40.00	-6.89	QP	
2		70.7400	42.45	-16.39	26.06	40.00	-13.94	QP	
3		129.9100	36.79	-15.31	21.48	43.50	-22.02	QP	
4		399.5700	35.22	-11.10	24.12	46.00	-21.88	QP	
5		742.9500	36.36	-5.07	31.29	46.00	-14.71	QP	
6		891.3600	38.71	-3.00	35.71	46.00	-10.29	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


## Horizontal

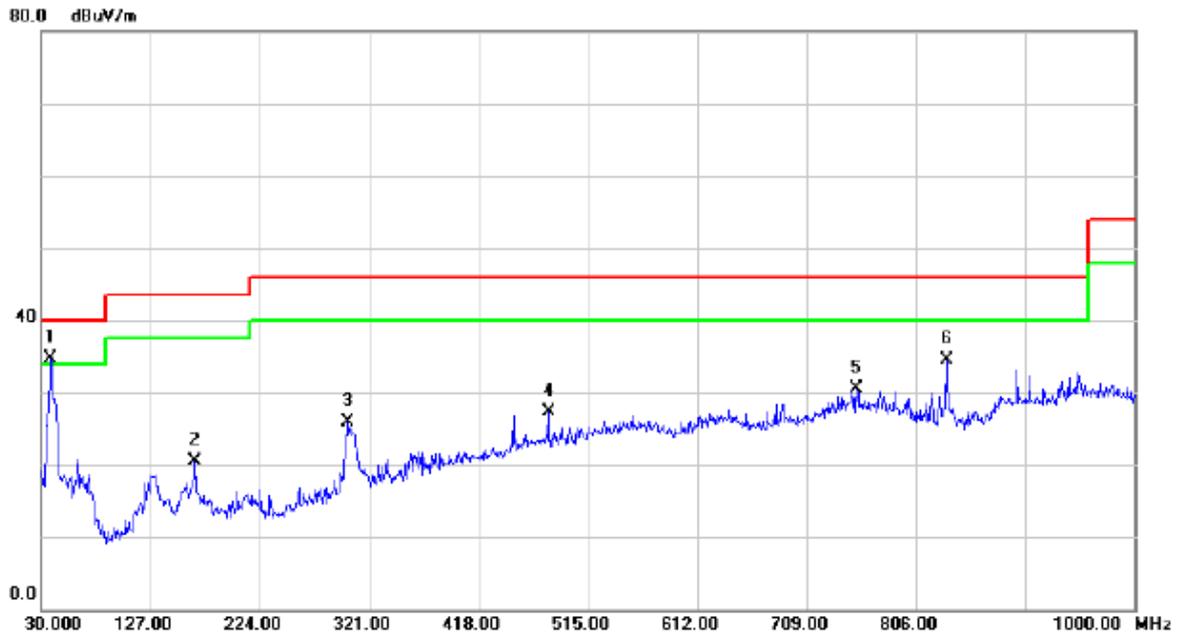

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	49.07	-14.44	34.63	40.00	-5.37	QP	
2		166.7700	34.78	-14.26	20.52	43.50	-22.98	QP	
3		302.5700	39.31	-13.42	25.89	46.00	-20.11	QP	
4		480.0800	36.74	-9.45	27.29	46.00	-18.71	QP	
5		753.6200	35.41	-5.00	30.41	46.00	-15.59	QP	
6		833.1600	38.67	-4.14	34.53	46.00	-11.47	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


### Vertical

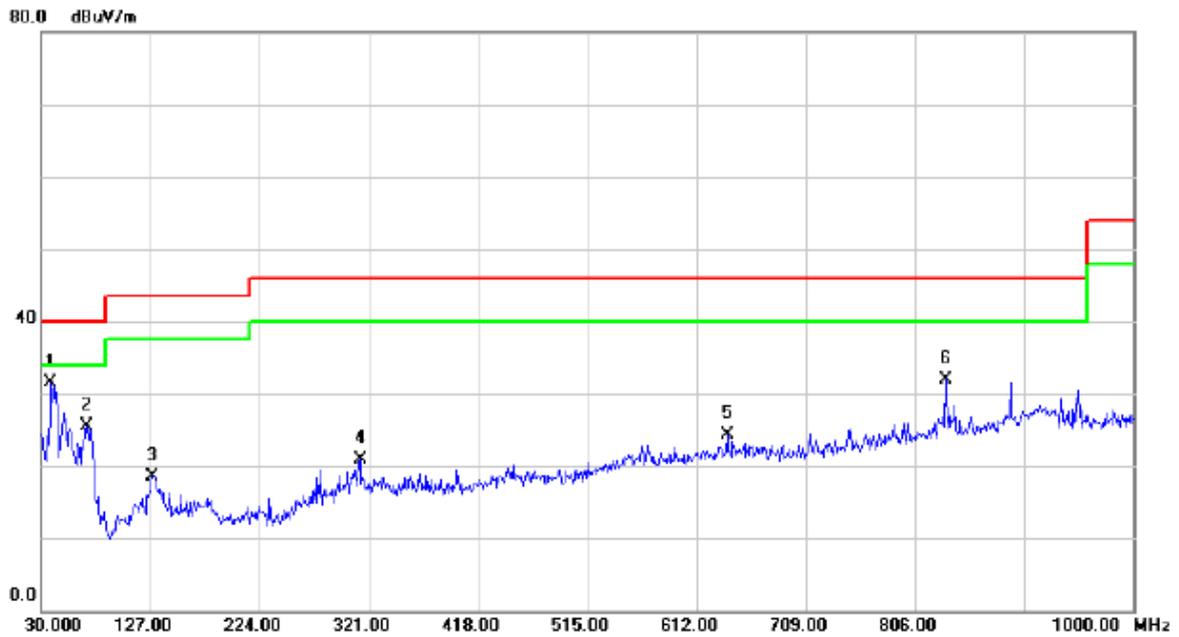

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	45.90	-14.44	31.46	40.00	-8.54	QP	
2		70.7400	41.87	-16.39	25.48	40.00	-14.52	QP	
3		128.9400	33.95	-15.40	18.55	43.50	-24.95	QP	
4		313.2400	34.01	-13.13	20.88	46.00	-25.12	QP	
5		639.1600	31.34	-7.03	24.31	46.00	-21.69	QP	
6		833.1600	36.14	-4.14	32.00	46.00	-14.00	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


## Horizontal

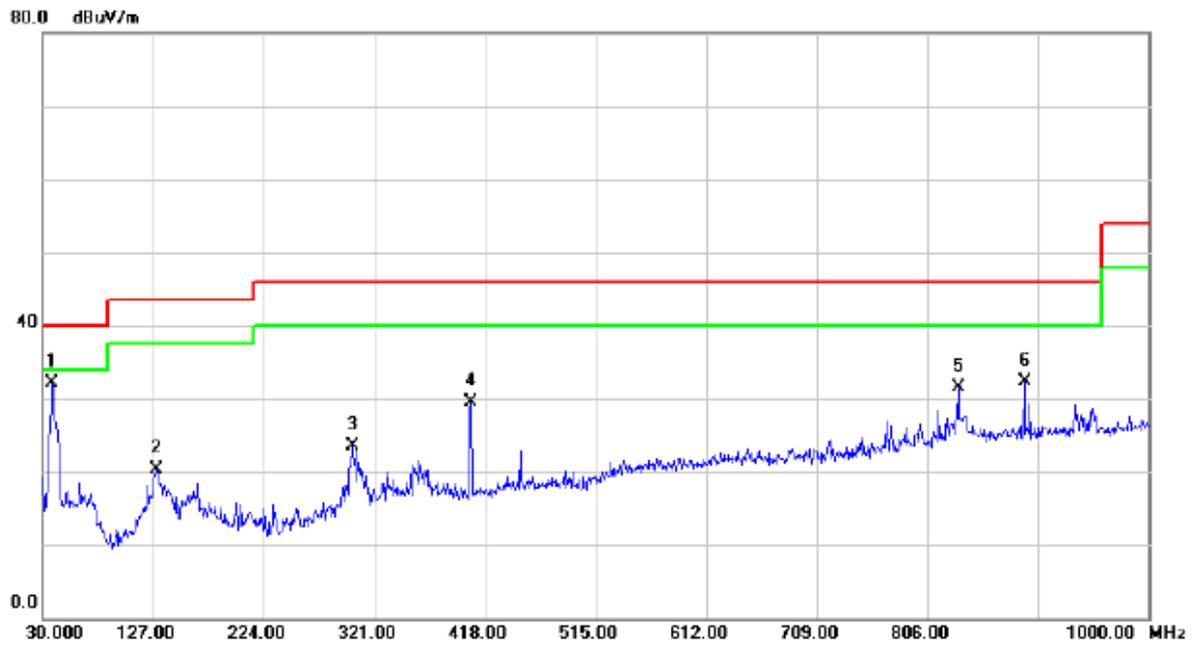

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	46.51	-14.44	32.07	40.00	-7.93	QP	
2		129.9100	35.69	-15.31	20.38	43.50	-23.12	QP	
3		301.6000	36.90	-13.44	23.46	46.00	-22.54	QP	
4		405.3900	40.50	-10.93	29.57	46.00	-16.43	QP	
5		833.1600	35.59	-4.14	31.45	46.00	-14.55	QP	
6		891.3600	35.28	-3.00	32.28	46.00	-13.72	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Playing+idle+speaker

## Vertical

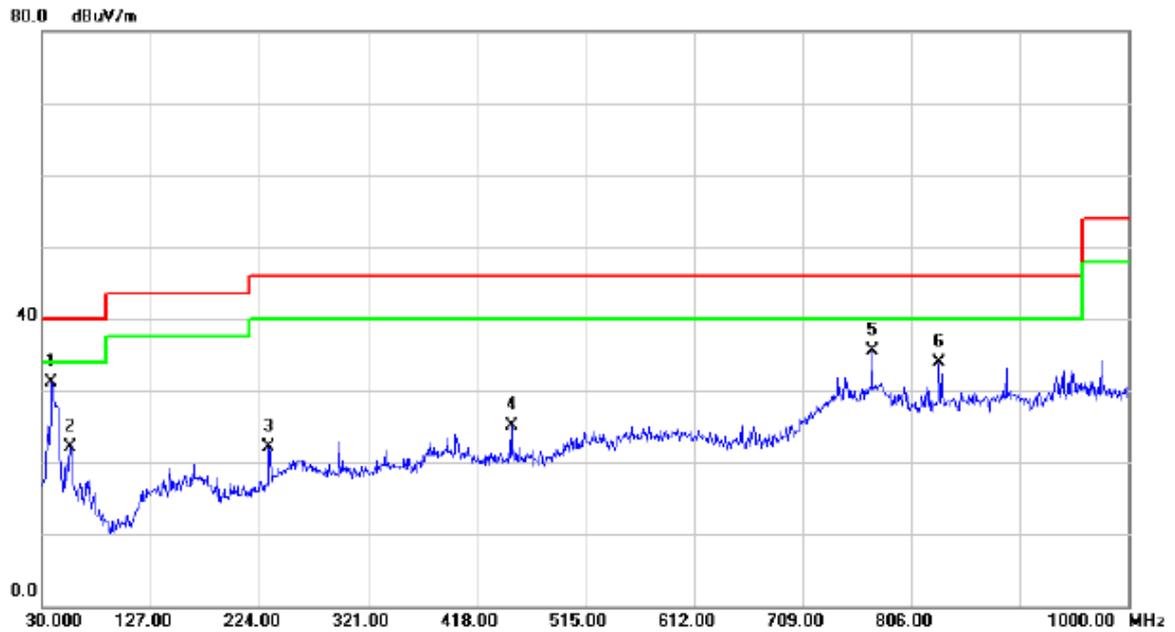

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	45.53	-14.44	31.09	40.00	-8.91	QP	
2		55.2200	36.41	-14.24	22.17	40.00	-17.83	QP	
3		232.7300	37.85	-15.68	22.17	46.00	-23.83	QP	
4		449.0400	34.83	-9.68	25.15	46.00	-20.85	QP	
5		771.0800	40.48	-4.90	35.58	46.00	-10.42	QP	
6		831.2200	38.01	-4.18	33.83	46.00	-12.17	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Playing+idle+speaker


## Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	49.09	-14.44	34.65	40.00	-5.35	QP	
2		449.0400	38.55	-9.68	28.87	46.00	-17.13	QP	
3		561.5600	37.65	-7.86	29.79	46.00	-16.21	QP	
4		800.1800	34.78	-4.74	30.04	46.00	-15.96	QP	
5		896.2100	36.36	-2.90	33.46	46.00	-12.54	QP	
6		951.5000	34.93	-1.74	33.19	46.00	-12.81	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle

## Vertical

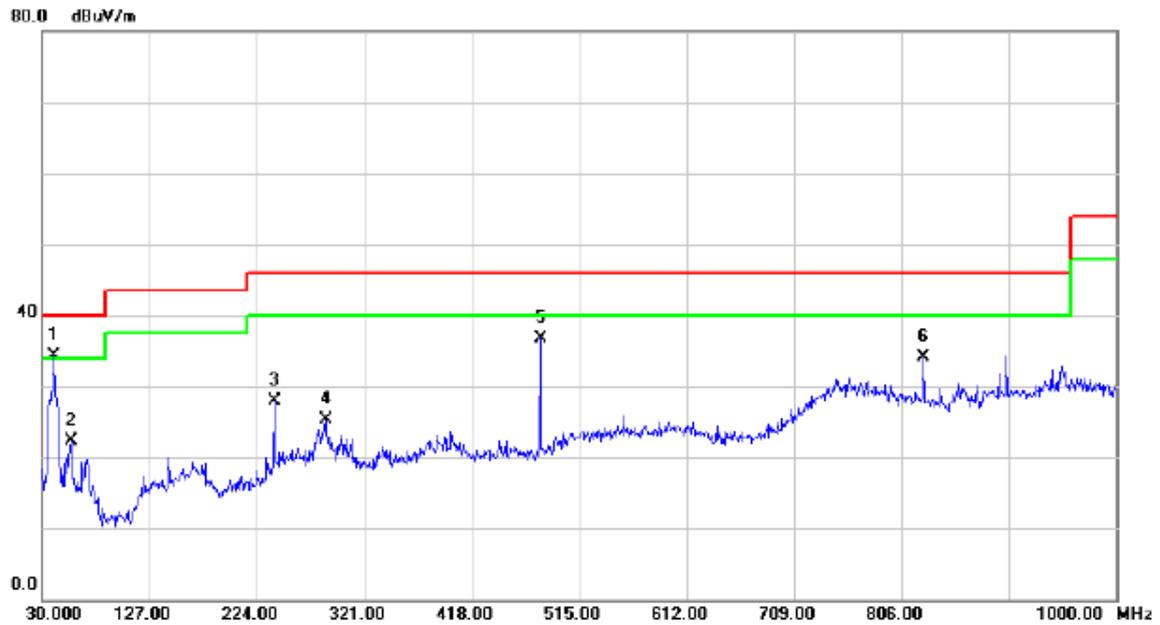

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40.6700	48.35	-14.13	34.22	40.00	-5.78	QP	
2		56.1900	36.66	-14.34	22.32	40.00	-17.68	QP	
3		239.5200	43.28	-15.28	28.00	46.00	-18.00	QP	
4		286.0800	39.06	-13.80	25.26	46.00	-20.74	QP	
5		480.0800	46.23	-9.45	36.78	46.00	-9.22	QP	
6		826.3700	38.42	-4.27	34.15	46.00	-11.85	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle


## Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	48.71	-14.44	34.27	40.00	-5.73	QP	
2		76.5600	39.93	-17.48	22.45	40.00	-17.55	QP	
3		122.1500	36.27	-16.02	20.25	43.50	-23.25	QP	
4		306.4500	39.30	-13.32	25.98	46.00	-20.02	QP	
5		480.0800	46.80	-9.45	37.35	46.00	-8.65	QP	
6		833.1600	38.26	-4.14	34.12	46.00	-11.88	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


### Vertical

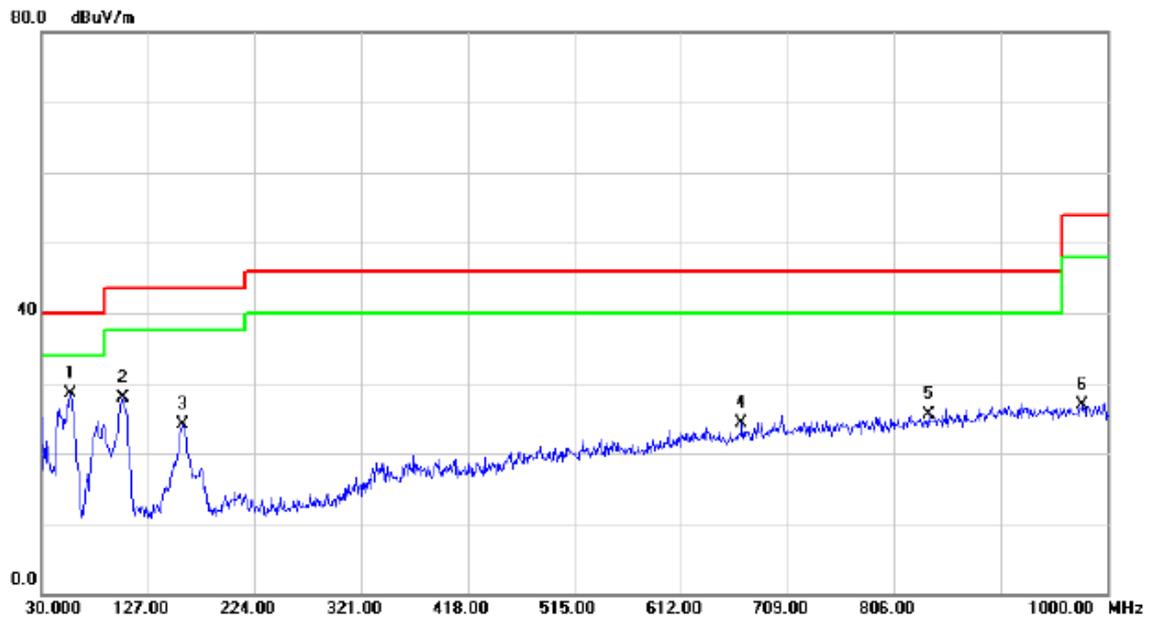

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.5000	47.87	-19.38	28.49	40.00	-11.51	QP	
2		104.0000	46.57	-18.70	27.87	43.50	-15.63	QP	
3		159.0000	41.10	-16.93	24.17	43.50	-19.33	QP	
4		667.5000	27.36	-3.02	24.34	46.00	-21.66	QP	
5		837.5000	25.88	-0.45	25.43	46.00	-20.57	QP	
6		978.5000	25.43	1.44	26.87	54.00	-27.13	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


## Horizontal

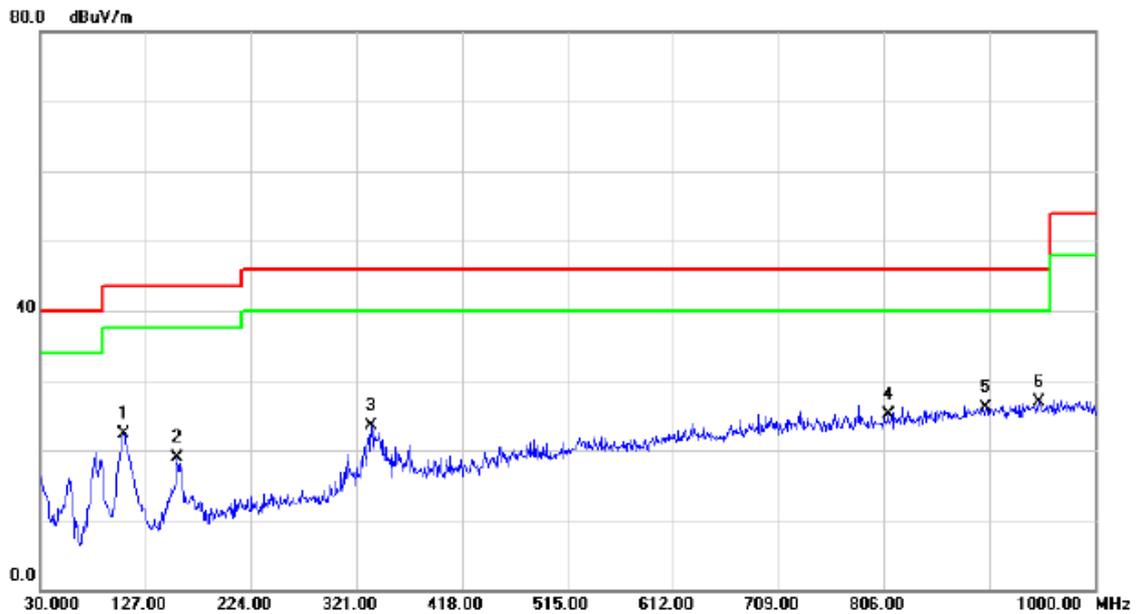

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		107.5000	41.09	-18.86	22.23	43.50	-21.27	QP	
2		157.0000	35.92	-17.09	18.83	43.50	-24.67	QP	
3		335.5000	33.41	-9.91	23.50	46.00	-22.50	QP	
4		810.0000	26.22	-1.05	25.17	46.00	-20.83	QP	
5		899.5000	25.15	0.92	26.07	46.00	-19.93	QP	
6	*	949.5000	25.64	1.25	26.89	46.00	-19.11	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


## Vertical

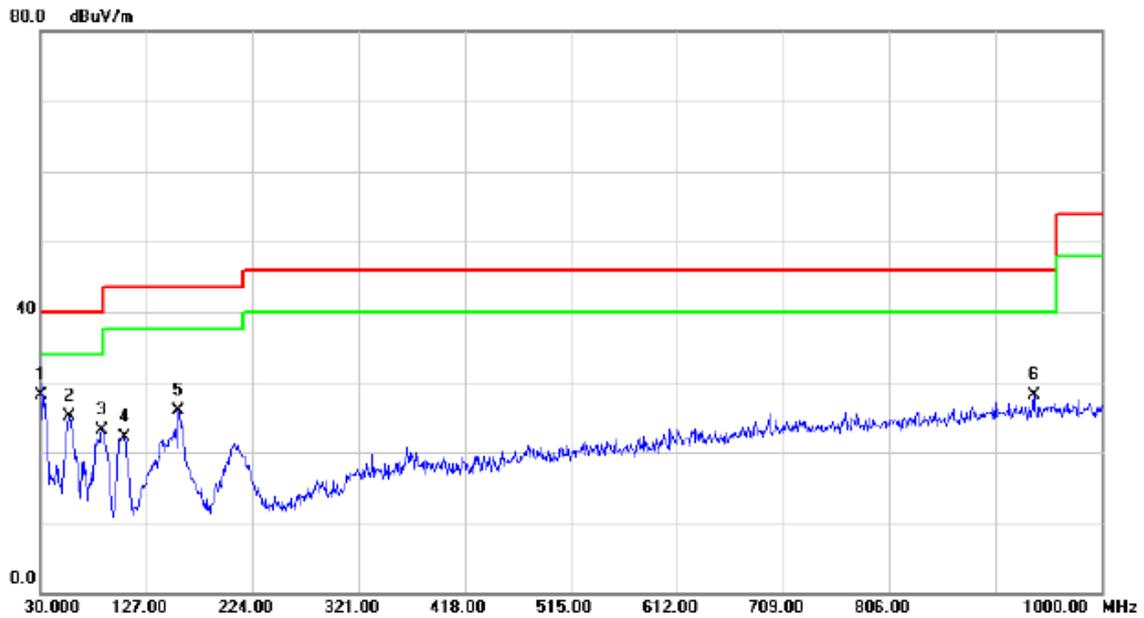

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	33.0000	39.79	-11.65	28.14	40.00	-11.86	QP	
2		56.5000	44.48	-19.38	25.10	40.00	-14.90	QP	
3		87.0000	42.96	-19.92	23.04	40.00	-16.96	QP	
4		107.5000	40.95	-18.86	22.09	43.50	-21.41	QP	
5		157.0000	43.09	-17.09	26.00	43.50	-17.50	QP	
6		938.5000	26.94	1.17	28.11	46.00	-17.89	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


## Horizontal

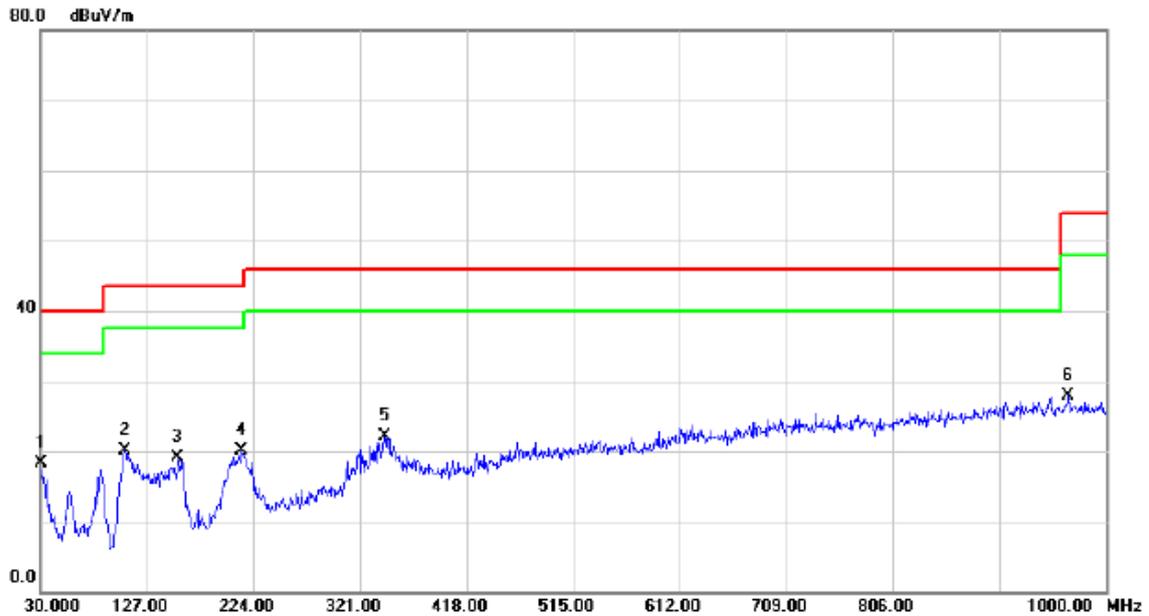

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	28.34	-9.96	18.38	40.00	-21.62	QP	
2		107.5000	38.88	-18.86	20.02	43.50	-23.48	QP	
3		155.5000	36.28	-17.20	19.08	43.50	-24.42	QP	
4		214.0000	34.94	-14.83	20.11	43.50	-23.39	QP	
5		343.5000	31.59	-9.52	22.07	46.00	-23.93	QP	
6		967.0000	26.57	1.37	27.94	54.00	-26.06	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


### Vertical

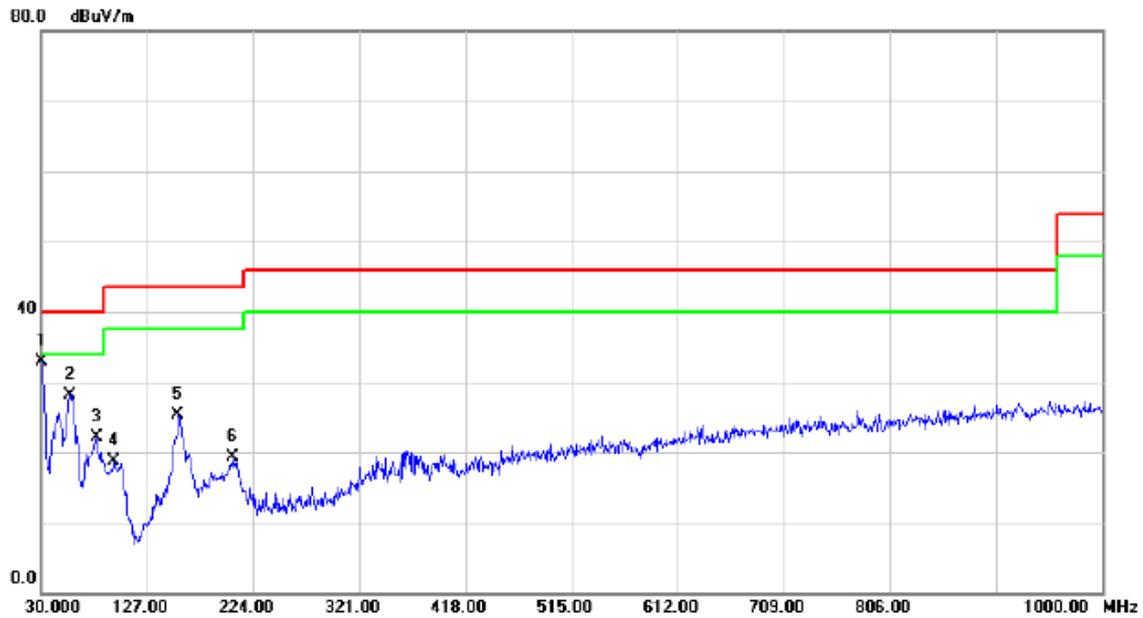

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	42.89	-9.96	32.93	40.00	-7.07	QP	
2		57.0000	47.50	-19.43	28.07	40.00	-11.93	QP	
3		81.0000	42.58	-20.56	22.02	40.00	-17.98	QP	
4		97.0000	37.50	-18.84	18.66	43.50	-24.84	QP	
5		156.0000	42.45	-17.17	25.28	43.50	-18.22	QP	
6		206.0000	34.60	-15.38	19.22	43.50	-24.28	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG

## Horizontal

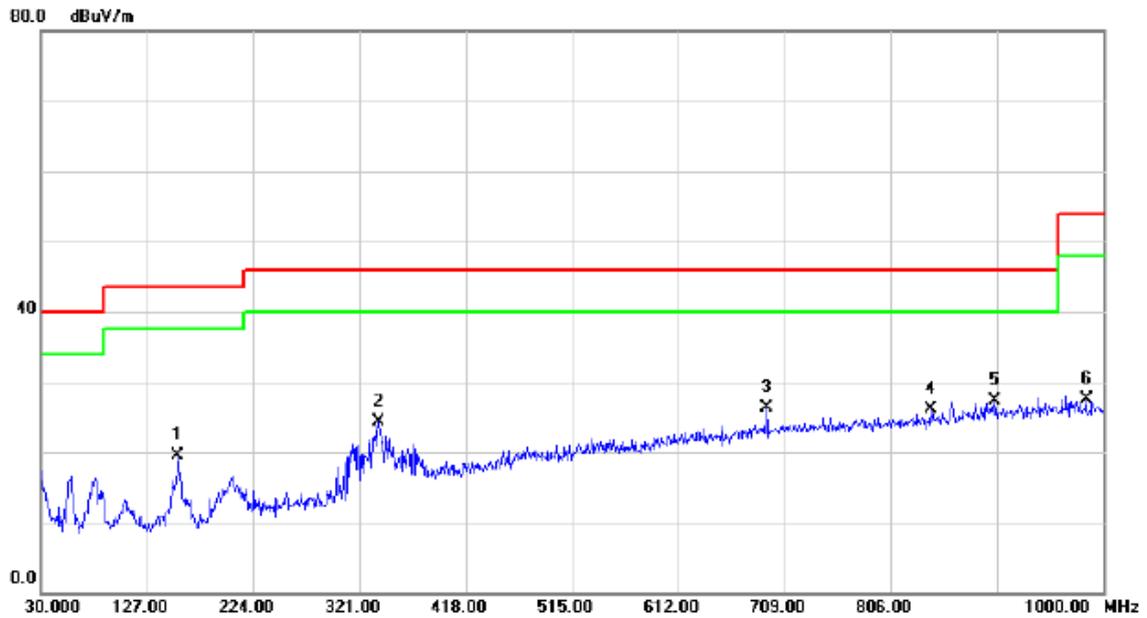


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		156.0000	36.67	-17.17	19.50	43.50	-24.00	QP	
2		339.0000	34.13	-9.74	24.39	46.00	-21.61	QP	
3		693.0000	28.52	-2.28	26.24	46.00	-19.76	QP	
4		843.0000	26.39	-0.33	26.06	46.00	-19.94	QP	
5	*	901.5000	26.41	0.94	27.35	46.00	-18.65	QP	
6		985.0000	26.11	1.46	27.57	54.00	-26.43	QP	

**ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)**

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


### Vertical

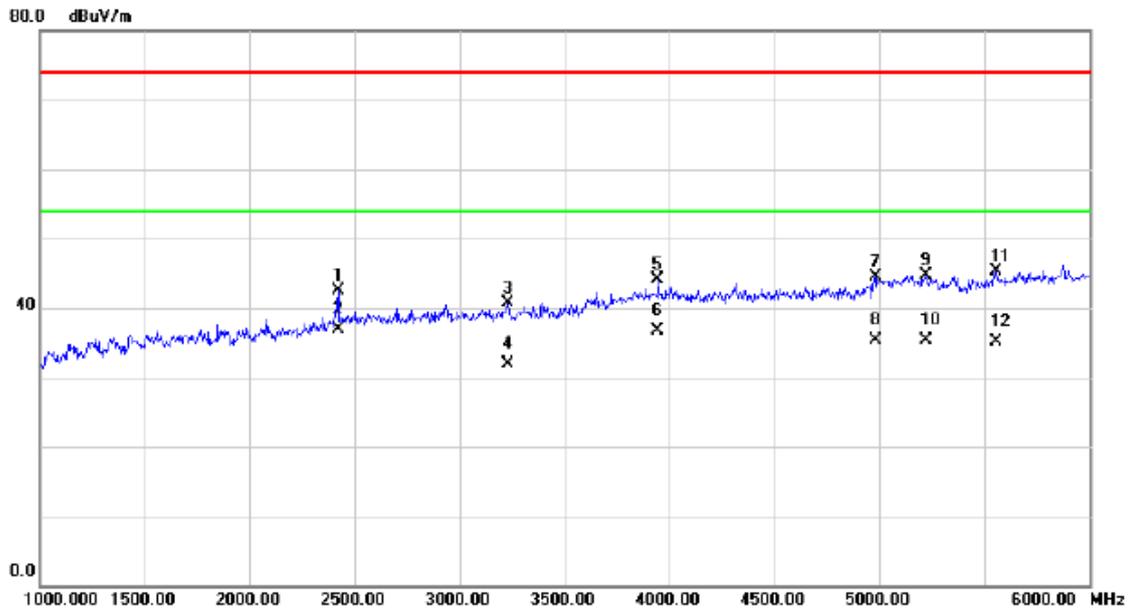

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin		
		MHz	dBuV	Factor	dBuV/m	dBuV/m	dB	Detector	Comment
1		2420.000	42.00	0.55	42.55	74.00	-31.45	peak	
2	*	2420.000	36.30	0.55	36.85	54.00	-17.15	AVG	
3		3230.000	37.09	3.54	40.63	74.00	-33.37	peak	
4		3230.000	28.41	3.54	31.95	54.00	-22.05	AVG	
5		3945.000	37.21	6.85	44.06	74.00	-29.94	peak	
6		3945.000	29.93	6.85	36.78	54.00	-17.22	AVG	
7		4980.000	35.54	9.04	44.58	74.00	-29.42	peak	
8		4980.000	26.34	9.04	35.38	54.00	-18.62	AVG	
9		5220.000	35.08	9.62	44.70	74.00	-29.30	peak	
10		5220.000	25.74	9.62	35.36	54.00	-18.64	AVG	
11		5555.000	34.97	10.40	45.37	74.00	-28.63	peak	
12		5555.000	24.63	10.40	35.03	54.00	-18.97	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


## Horizontal

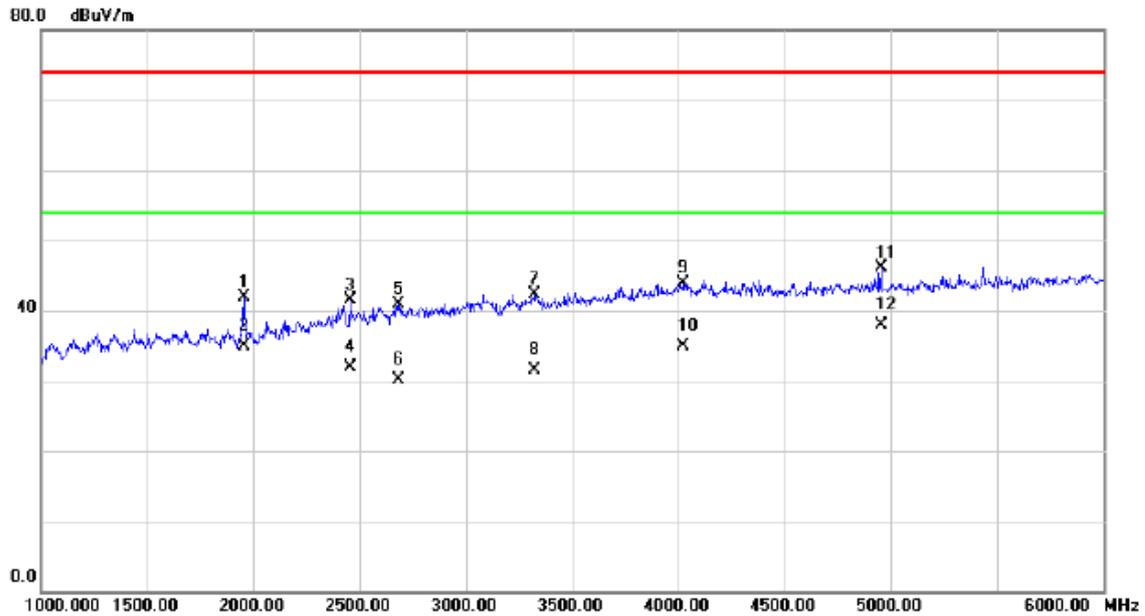

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1955.000	44.02	-2.12	41.90	74.00	-32.10	peak	
2		1955.000	37.01	-2.12	34.89	54.00	-19.11	AVG	
3		2455.000	40.82	0.77	41.59	74.00	-32.41	peak	
4		2455.000	31.22	0.77	31.99	54.00	-22.01	AVG	
5		2685.000	39.15	1.73	40.88	74.00	-33.12	peak	
6		2685.000	28.42	1.73	30.15	54.00	-23.85	AVG	
7		3325.000	38.57	3.81	42.38	74.00	-31.62	peak	
8		3325.000	27.65	3.81	31.46	54.00	-22.54	AVG	
9		4025.000	36.78	7.19	43.97	74.00	-30.03	peak	
10		4025.000	27.69	7.19	34.88	54.00	-19.12	AVG	
11		4955.000	37.16	8.96	46.12	74.00	-27.88	peak	
12	*	4955.000	28.92	8.96	37.88	54.00	-16.12	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


## Vertical

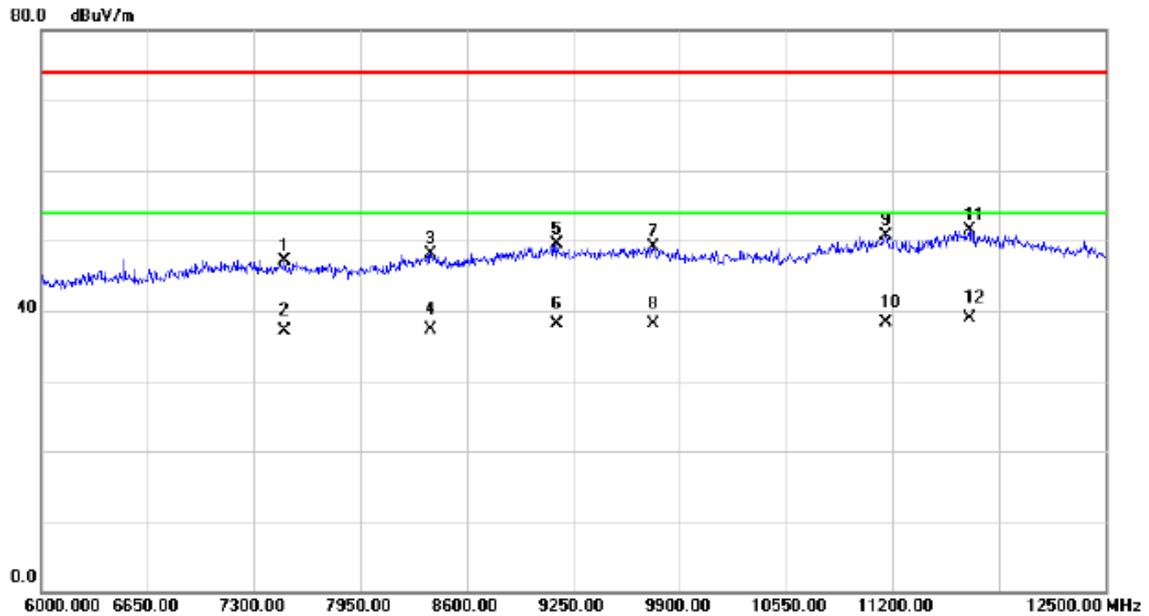

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7488.500	32.49	14.52	47.01	74.00	-26.99	peak	
2	7488.500	22.68	14.52	37.20	54.00	-16.80	AVG	
3	8379.000	32.66	15.42	48.08	74.00	-25.92	peak	
4	8379.000	21.81	15.42	37.23	54.00	-16.77	AVG	
5	9146.000	32.62	16.83	49.45	74.00	-24.55	peak	
6	9146.000	21.29	16.83	38.12	54.00	-15.88	AVG	
7	9737.500	31.94	17.17	49.11	74.00	-24.89	peak	
8	9737.500	20.95	17.17	38.12	54.00	-15.88	AVG	
9	11161.00	31.30	19.44	50.74	74.00	-23.26	peak	
10	11161.00	18.79	19.44	38.23	54.00	-15.77	AVG	
11	11668.00	31.06	20.41	51.47	74.00	-22.53	peak	
12 *	11668.00	18.58	20.41	38.99	54.00	-15.01	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


## Horizontal

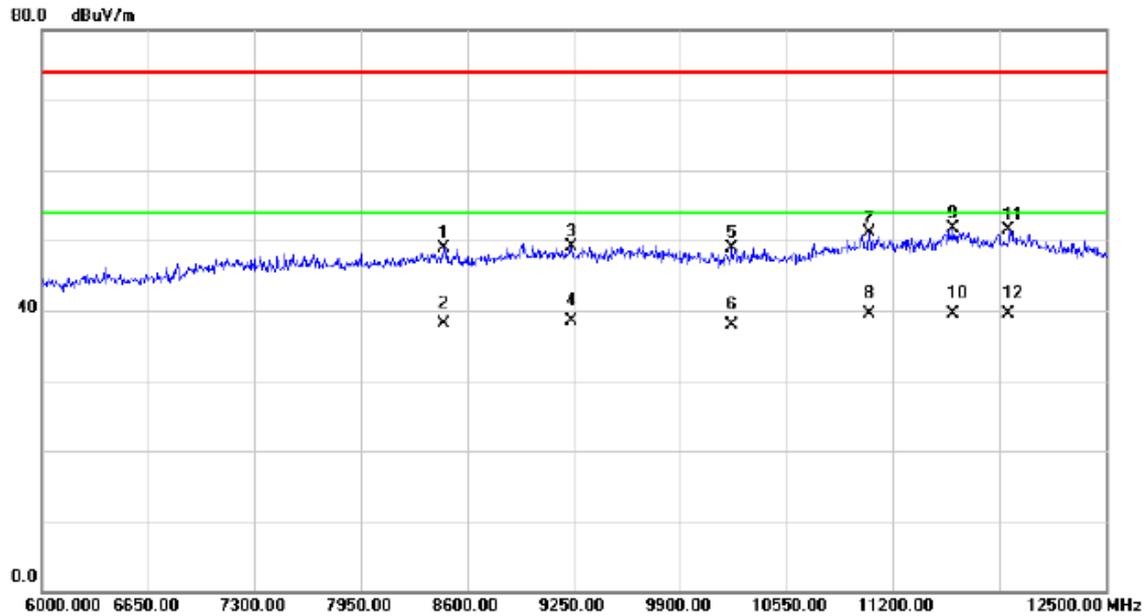

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		8457.000	33.40	15.50	48.90	74.00	-25.10	peak	
2		8457.000	22.70	15.50	38.20	54.00	-15.80	AVG	
3		9237.000	32.27	16.90	49.17	74.00	-24.83	peak	
4		9237.000	21.51	16.90	38.41	54.00	-15.59	AVG	
5		10218.50	31.55	17.26	48.81	74.00	-25.19	peak	
6		10218.50	20.59	17.26	37.85	54.00	-16.15	AVG	
7		11057.00	31.79	19.23	51.02	74.00	-22.98	peak	
8		11057.00	20.22	19.23	39.45	54.00	-14.55	AVG	
9		11570.50	31.35	20.26	51.61	74.00	-22.39	peak	
10		11570.50	19.15	20.26	39.41	54.00	-14.59	AVG	
11		11908.50	30.77	20.76	51.53	74.00	-22.47	peak	
12	*	11908.50	18.71	20.76	39.47	54.00	-14.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+nfc+speaker
Note:	Adapter: BYD


## Vertical

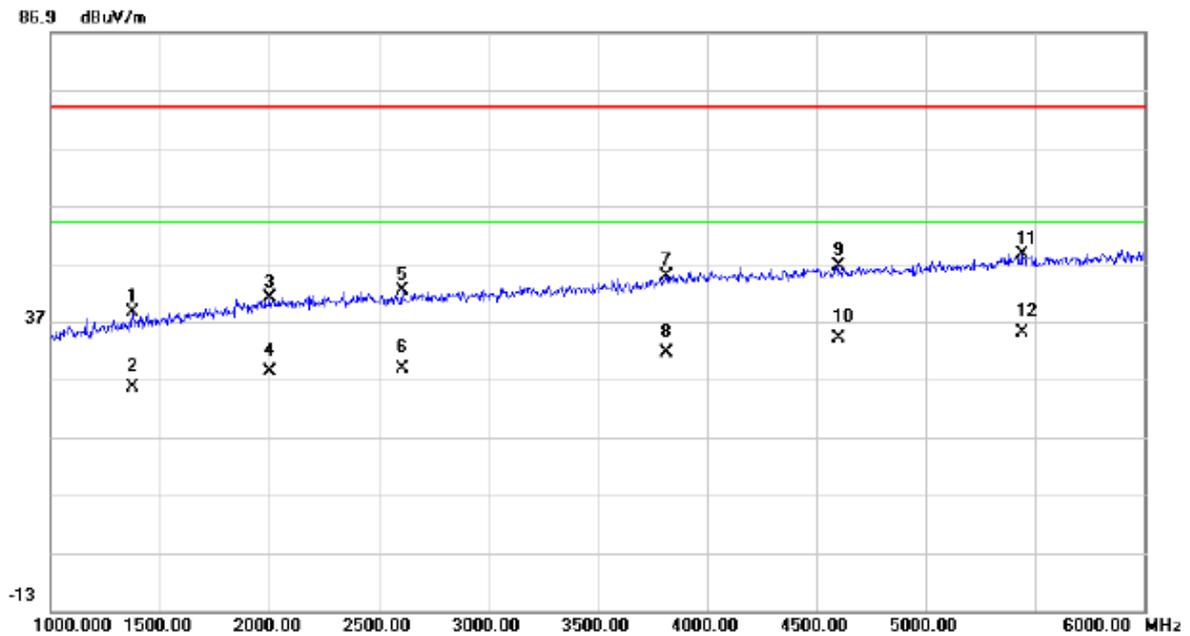

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1375.000	42.92	-4.44	38.48	74.00	-35.52	peak	
2		1375.000	30.01	-4.44	25.57	54.00	-28.43	AVG	
3		2000.000	42.88	-1.88	41.00	74.00	-33.00	peak	
4		2000.000	30.10	-1.88	28.22	54.00	-25.78	AVG	
5		2610.000	41.91	0.46	42.37	74.00	-31.63	peak	
6		2610.000	28.28	0.46	28.74	54.00	-25.26	AVG	
7		3815.000	39.49	5.28	44.77	74.00	-29.23	peak	
8		3815.000	26.37	5.28	31.65	54.00	-22.35	AVG	
9		4600.000	39.49	7.07	46.56	74.00	-27.44	peak	
10		4600.000	26.95	7.07	34.02	54.00	-19.98	AVG	
11		5440.000	39.69	8.96	48.65	74.00	-25.35	peak	
12	*	5440.000	26.19	8.96	35.15	54.00	-18.85	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+nfc+speaker
Note:	Adapter: BYD


## Horizontal

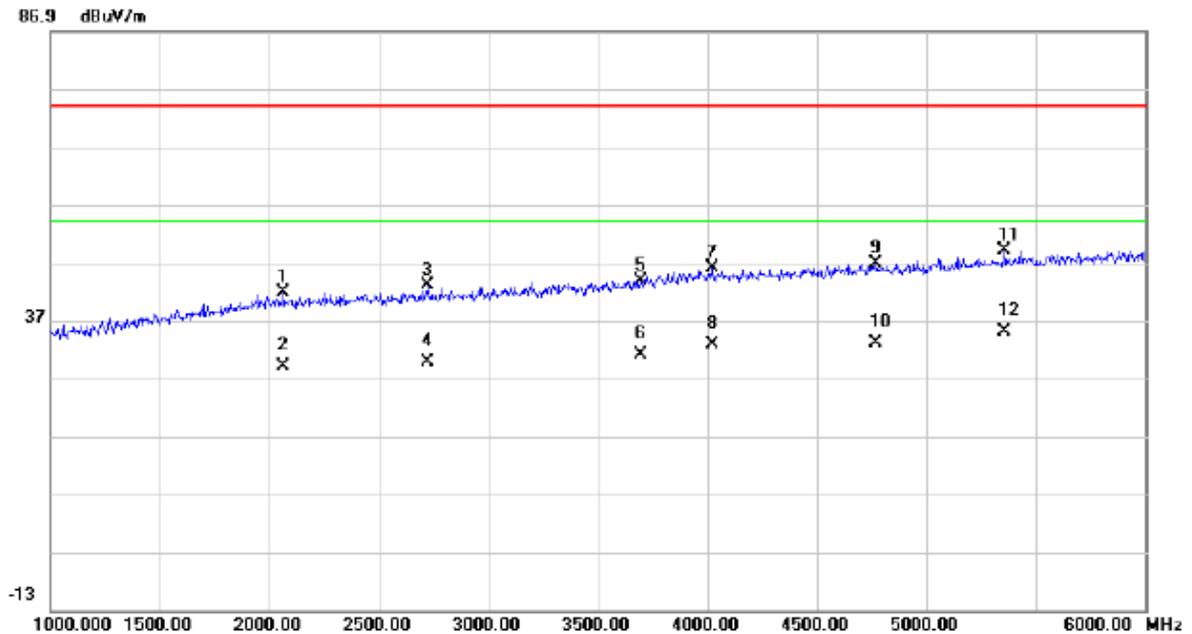

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2065.000	43.53	-1.63	41.90	74.00	-32.10	peak	
2		2065.000	30.74	-1.63	29.11	54.00	-24.89	AVG	
3		2725.000	42.28	0.87	43.15	74.00	-30.85	peak	
4		2725.000	29.00	0.87	29.87	54.00	-24.13	AVG	
5		3695.000	39.45	4.41	43.86	74.00	-30.14	peak	
6		3695.000	26.73	4.41	31.14	54.00	-22.86	AVG	
7		4020.000	39.44	6.63	46.07	74.00	-27.93	peak	
8		4020.000	26.04	6.63	32.67	54.00	-21.33	AVG	
9		4770.000	39.39	7.31	46.70	74.00	-27.30	peak	
10		4770.000	25.77	7.31	33.08	54.00	-20.92	AVG	
11		5355.000	40.37	8.71	49.08	74.00	-24.92	peak	
12	*	5355.000	26.21	8.71	34.92	54.00	-19.08	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+nfc+speaker
Note:	Adapter: BYD


## Vertical

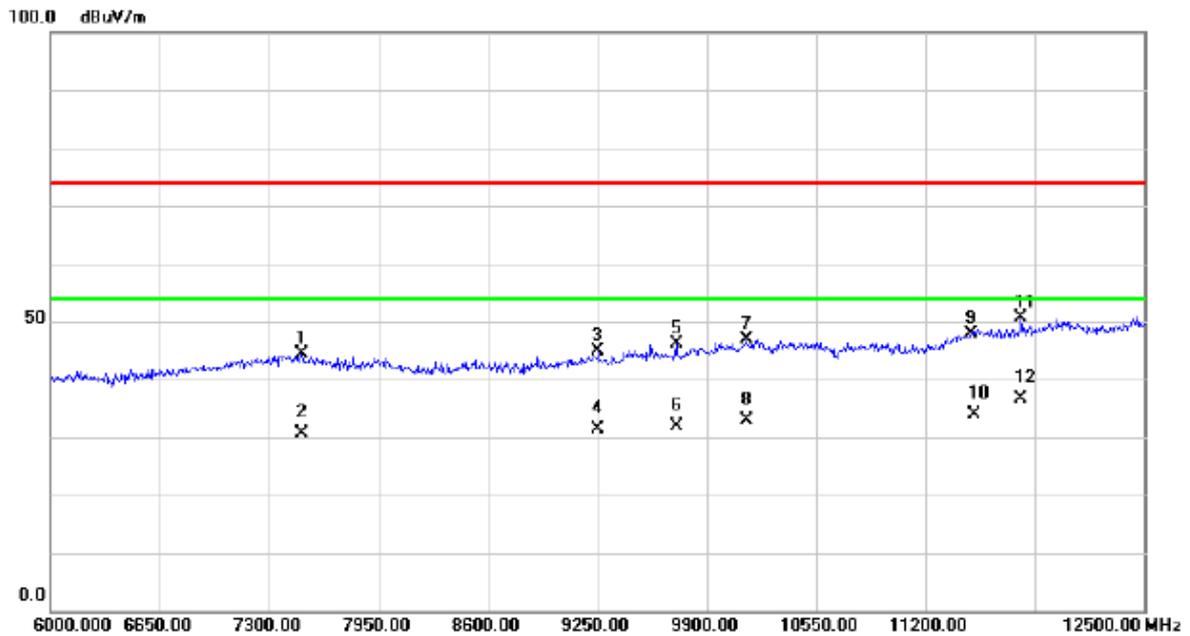

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7495.000	28.47	15.96	44.43	74.00	-29.57	peak	
2		7495.000	14.62	15.96	30.58	54.00	-23.42	AVG	
3		9256.500	29.30	15.66	44.96	74.00	-29.04	peak	
4		9256.500	15.84	15.66	31.50	54.00	-22.50	AVG	
5		9718.000	30.61	15.56	46.17	74.00	-27.83	peak	
6		9718.000	16.21	15.56	31.77	54.00	-22.23	AVG	
7		10134.00	31.42	15.50	46.92	74.00	-27.08	peak	
8		10134.00	17.35	15.50	32.85	54.00	-21.15	AVG	
9		11473.00	27.78	20.15	47.93	74.00	-26.07	peak	
10		11473.00	13.84	20.15	33.99	54.00	-20.01	AVG	
11		11765.50	28.69	21.83	50.52	74.00	-23.48	peak	
12	*	11765.50	14.75	21.83	36.58	54.00	-17.42	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+nfc+speaker
Note:	Adapter: BYD


## Horizontal

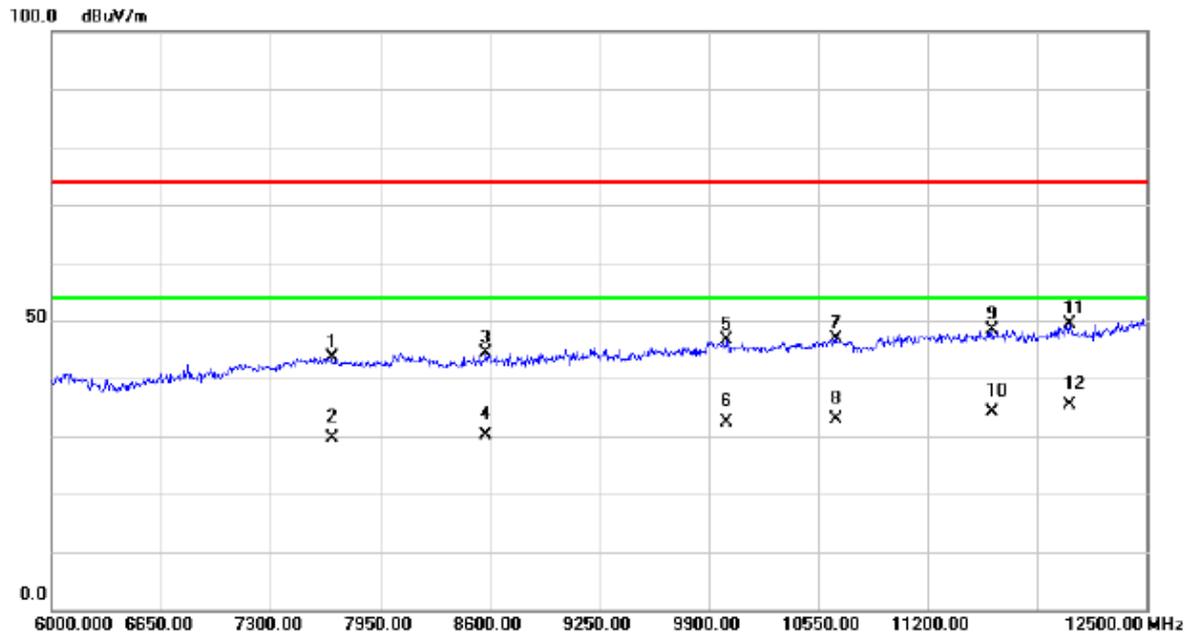

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7664.000	27.68	16.01	43.69	74.00	-30.31	peak	
2		7664.000	13.57	16.01	29.58	54.00	-24.42	AVG	
3		8580.500	28.76	15.52	44.28	74.00	-29.72	peak	
4		8580.500	14.64	15.52	30.16	54.00	-23.84	AVG	
5		10010.50	30.67	16.02	46.69	74.00	-27.31	peak	
6		10010.50	16.40	16.02	32.42	54.00	-21.58	AVG	
7		10654.00	30.99	15.96	46.95	74.00	-27.05	peak	
8		10654.00	17.02	15.96	32.98	54.00	-21.02	AVG	
9		11583.50	27.79	20.67	48.46	74.00	-25.54	peak	
10		11583.50	13.54	20.67	34.21	54.00	-19.79	AVG	
11		12045.00	26.57	22.81	49.38	74.00	-24.62	peak	
12	*	12045.00	12.69	22.81	35.50	54.00	-18.50	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


## Vertical

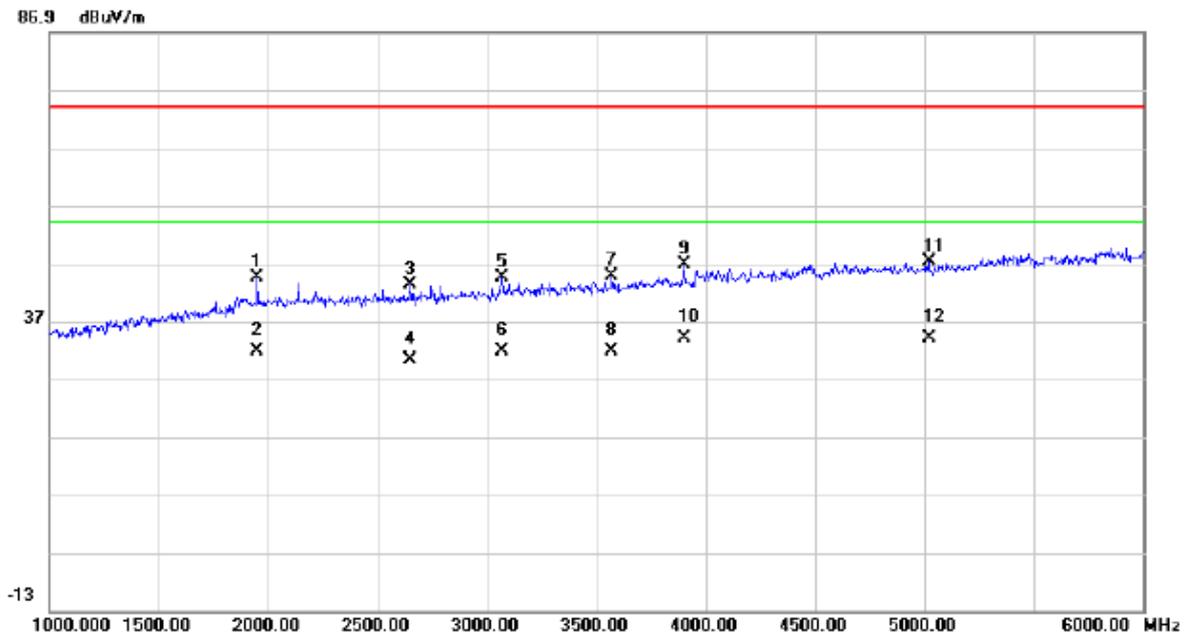

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1950.000	46.54	-2.10	44.44	74.00	-29.56	peak	
2		1950.000	33.77	-2.10	31.67	54.00	-22.33	AVG	
3		2650.000	42.55	0.61	43.16	74.00	-30.84	peak	
4		2650.000	29.59	0.61	30.20	54.00	-23.80	AVG	
5		3070.000	42.57	2.00	44.57	74.00	-29.43	peak	
6		3070.000	29.78	2.00	31.78	54.00	-22.22	AVG	
7		3570.000	41.22	3.51	44.73	74.00	-29.27	peak	
8		3570.000	28.23	3.51	31.74	54.00	-22.26	AVG	
9		3900.000	40.87	5.89	46.76	74.00	-27.24	peak	
10	*	3900.000	28.18	5.89	34.07	54.00	-19.93	AVG	
11		5020.000	39.54	7.69	47.23	74.00	-26.77	peak	
12		5020.000	26.34	7.69	34.03	54.00	-19.97	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


## Horizontal

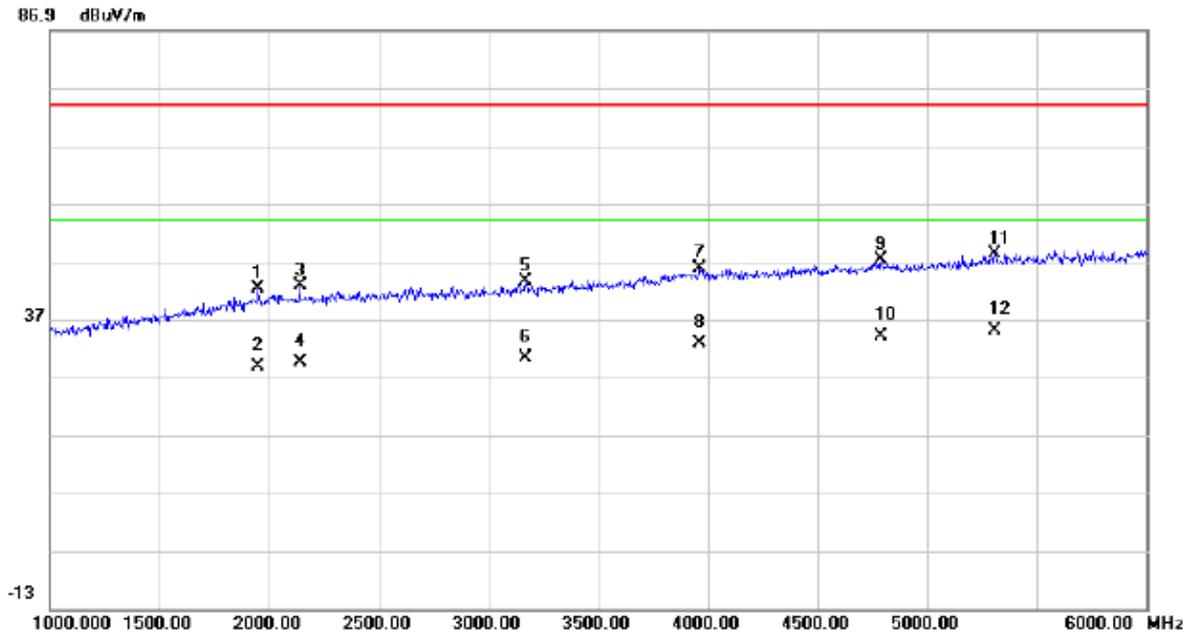

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1950.000	44.44	-2.10	42.34	74.00	-31.66	peak	
2		1950.000	30.78	-2.10	28.68	54.00	-25.32	AVG	
3		2140.000	44.04	-1.33	42.71	74.00	-31.29	peak	
4		2140.000	30.77	-1.33	29.44	54.00	-24.56	AVG	
5		3170.000	41.19	2.23	43.42	74.00	-30.58	peak	
6		3170.000	28.00	2.23	30.23	54.00	-23.77	AVG	
7		3965.000	39.36	6.37	45.73	74.00	-28.27	peak	
8		3965.000	26.48	6.37	32.85	54.00	-21.15	AVG	
9		4790.000	40.01	7.34	47.35	74.00	-26.65	peak	
10		4790.000	26.79	7.34	34.13	54.00	-19.87	AVG	
11		5310.000	39.82	8.57	48.39	74.00	-25.61	peak	
12	*	5310.000	26.54	8.57	35.11	54.00	-18.89	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


### Vertical

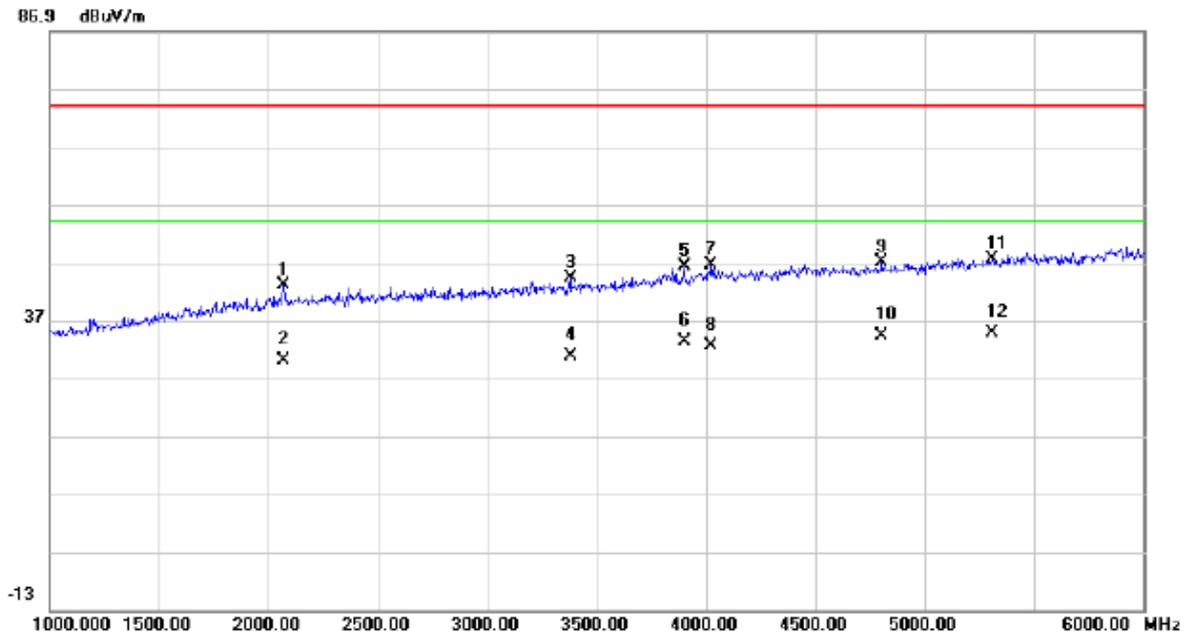

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2070.000	44.58	-1.60	42.98	74.00	-31.02	peak	
2		2070.000	31.71	-1.60	30.11	54.00	-23.89	AVG	
3		3380.000	41.45	2.72	44.17	74.00	-29.83	peak	
4		3380.000	27.99	2.72	30.71	54.00	-23.29	AVG	
5		3900.000	40.47	5.89	46.36	74.00	-27.64	peak	
6		3900.000	27.50	5.89	33.39	54.00	-20.61	AVG	
7		4025.000	39.99	6.63	46.62	74.00	-27.38	peak	
8		4025.000	26.02	6.63	32.65	54.00	-21.35	AVG	
9		4805.000	39.60	7.36	46.96	74.00	-27.04	peak	
10		4805.000	26.90	7.36	34.26	54.00	-19.74	AVG	
11		5310.000	39.06	8.57	47.63	74.00	-26.37	peak	
12	*	5310.000	26.23	8.57	34.80	54.00	-19.20	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


## Horizontal

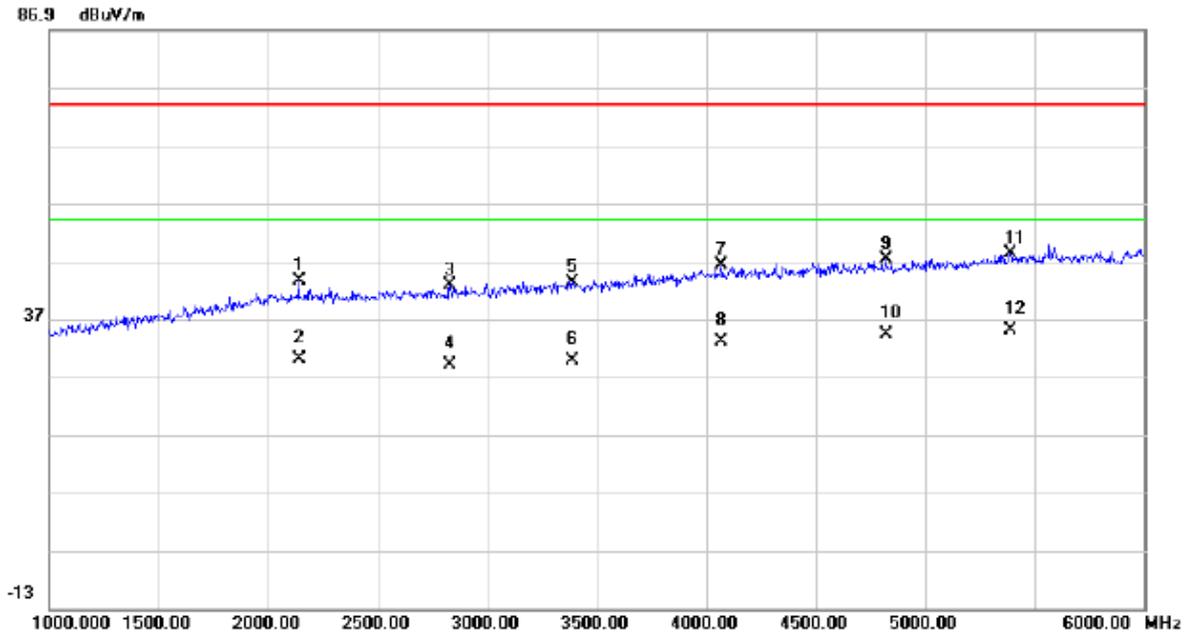

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2140.000	44.93	-1.33	43.60	74.00	-30.40	peak	
2		2140.000	31.28	-1.33	29.95	54.00	-24.05	AVG	
3		2830.000	41.43	1.24	42.67	74.00	-31.33	peak	
4		2830.000	27.72	1.24	28.96	54.00	-25.04	AVG	
5		3390.000	40.48	2.74	43.22	74.00	-30.78	peak	
6		3390.000	27.00	2.74	29.74	54.00	-24.26	AVG	
7		4070.000	39.54	6.66	46.20	74.00	-27.80	peak	
8		4070.000	26.36	6.66	33.02	54.00	-20.98	AVG	
9		4820.000	39.83	7.38	47.21	74.00	-26.79	peak	
10		4820.000	26.82	7.38	34.20	54.00	-19.80	AVG	
11		5390.000	39.37	8.81	48.18	74.00	-25.82	peak	
12	*	5390.000	26.27	8.81	35.08	54.00	-18.92	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


## Vertical

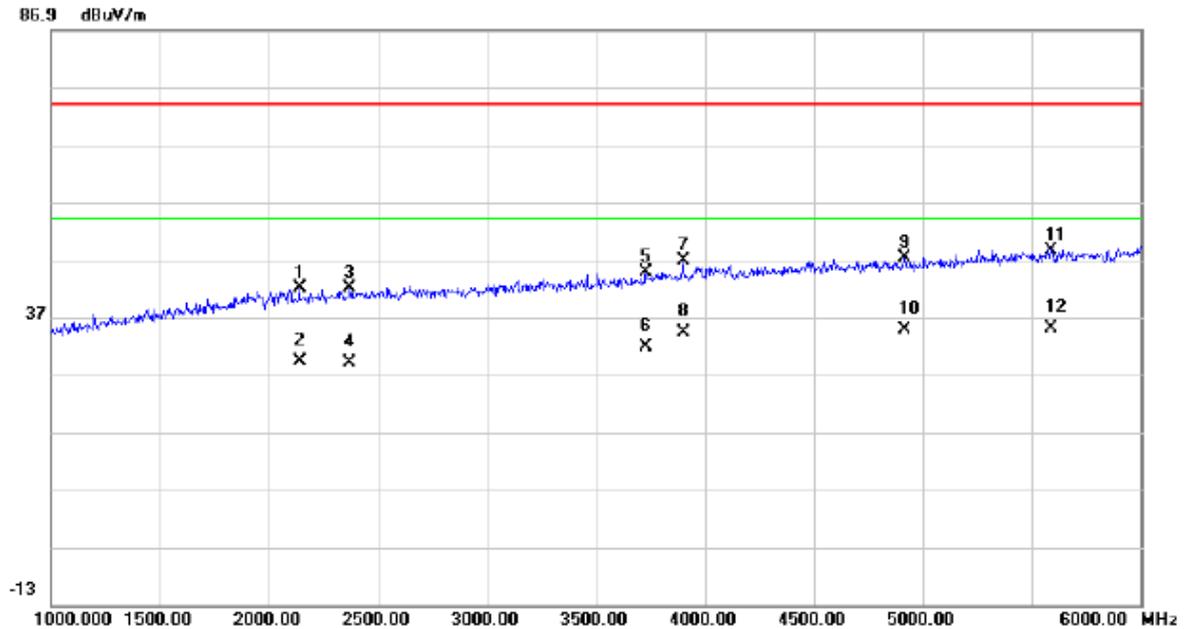

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2140.000	43.29	-1.33	41.96	74.00	-32.04	peak	
2	2140.000	30.52	-1.33	29.19	54.00	-24.81	AVG	
3	2370.000	42.56	-0.42	42.14	74.00	-31.86	peak	
4	2370.000	29.37	-0.42	28.95	54.00	-25.05	AVG	
5	3730.000	40.14	4.66	44.80	74.00	-29.20	peak	
6	3730.000	27.12	4.66	31.78	54.00	-22.22	AVG	
7	3900.000	40.86	5.89	46.75	74.00	-27.25	peak	
8	3900.000	28.50	5.89	34.39	54.00	-19.61	AVG	
9	4915.000	39.85	7.51	47.36	74.00	-26.64	peak	
10	4915.000	27.28	7.51	34.79	54.00	-19.21	AVG	
11	5590.000	39.40	9.25	48.65	74.00	-25.35	peak	
12 *	5590.000	25.82	9.25	35.07	54.00	-18.93	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


## Horizontal

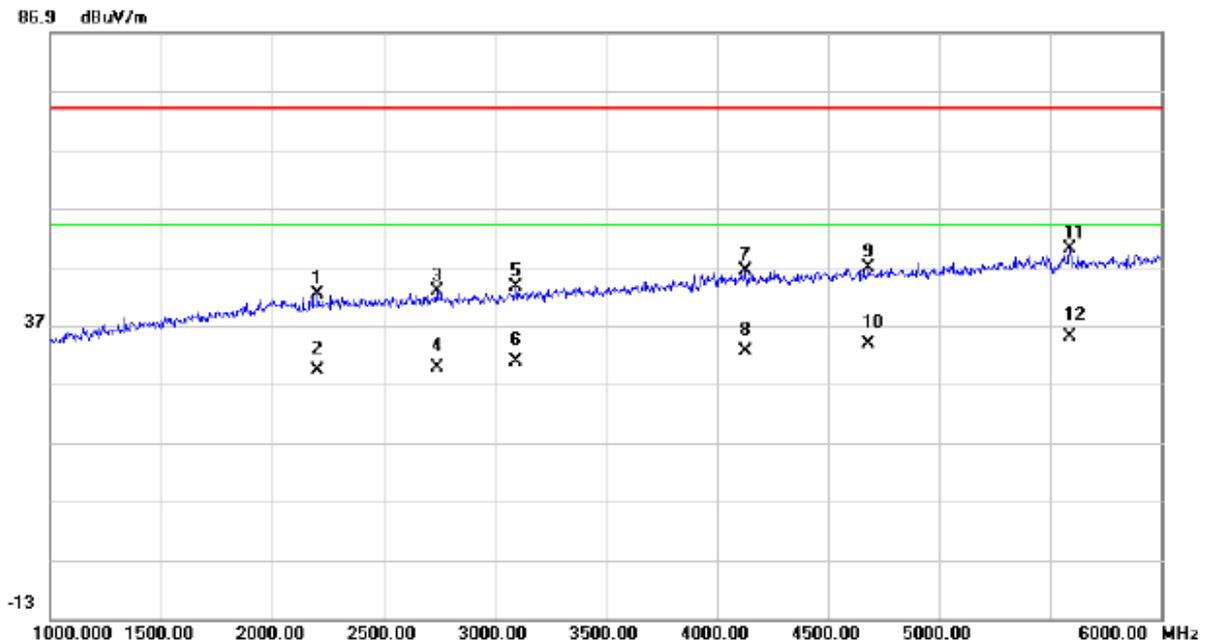

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2205.000	43.25	-1.07	42.18	74.00	-31.82	peak	
2		2205.000	30.33	-1.07	29.26	54.00	-24.74	AVG	
3		2740.000	41.76	0.92	42.68	74.00	-31.32	peak	
4		2740.000	28.90	0.92	29.82	54.00	-24.18	AVG	
5		3095.000	41.38	2.06	43.44	74.00	-30.56	peak	
6		3095.000	28.71	2.06	30.77	54.00	-23.23	AVG	
7		4130.000	39.47	6.70	46.17	74.00	-27.83	peak	
8		4130.000	25.93	6.70	32.63	54.00	-21.37	AVG	
9		4685.000	39.53	7.19	46.72	74.00	-27.28	peak	
10		4685.000	26.64	7.19	33.83	54.00	-20.17	AVG	
11		5590.000	40.73	9.25	49.98	74.00	-24.02	peak	
12	*	5590.000	25.73	9.25	34.98	54.00	-19.02	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD

### Vertical

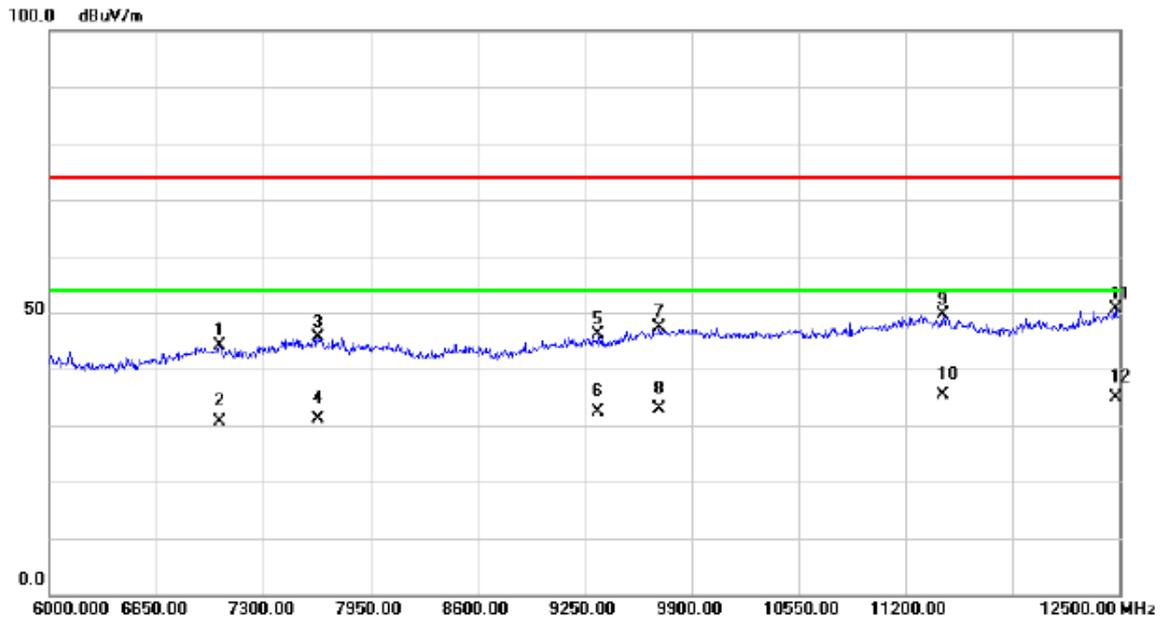

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7033.500	30.18	14.01	44.19	74.00	-29.81	peak	
2		7033.500	16.51	14.01	30.52	54.00	-23.48	AVG	
3		7631.500	29.62	16.01	45.63	74.00	-28.37	peak	
4		7631.500	15.24	16.01	31.25	54.00	-22.75	AVG	
5		9334.500	30.58	15.50	46.08	74.00	-27.92	peak	
6		9334.500	16.87	15.50	32.37	54.00	-21.63	AVG	
7		9705.000	31.80	15.53	47.33	74.00	-26.67	peak	
8		9705.000	17.42	15.53	32.95	54.00	-21.05	AVG	
9		11427.50	29.52	20.18	49.70	74.00	-24.30	peak	
10	*	11427.50	15.31	20.18	35.49	54.00	-18.51	AVG	
11		12474.00	32.77	17.97	50.74	74.00	-23.26	peak	
12		12474.00	17.00	17.97	34.97	54.00	-19.03	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


## Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7053.000	29.59	14.11	43.70	74.00	-30.30	peak	
2		7053.000	15.26	14.11	29.37	54.00	-24.63	AVG	
3		7586.000	28.34	16.01	44.35	74.00	-29.65	peak	
4		7586.000	14.26	16.01	30.27	54.00	-23.73	AVG	
5		9406.000	31.23	15.36	46.59	74.00	-27.41	peak	
6		9406.000	17.64	15.36	33.00	54.00	-21.00	AVG	
7		9620.500	32.30	15.38	47.68	74.00	-26.32	peak	
8		9620.500	18.94	15.38	34.32	54.00	-19.68	AVG	
9		11057.000	27.18	20.36	47.54	74.00	-26.46	peak	
10		11057.000	13.24	20.36	33.60	54.00	-20.40	AVG	
11		11804.500	27.34	22.07	49.41	74.00	-24.59	peak	
12	*	11804.500	12.74	22.07	34.81	54.00	-19.19	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Playing+idle+speaker


## Vertical

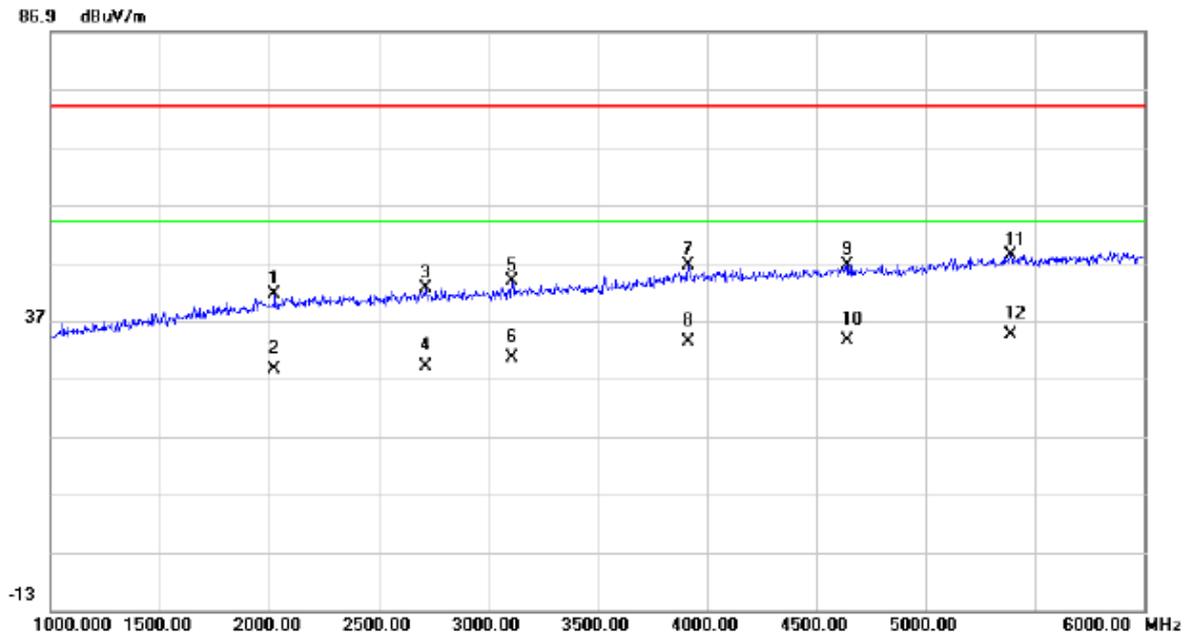

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2025.000	43.26	-1.78	41.48	74.00	-32.52	peak	
2		2025.000	30.19	-1.78	28.41	54.00	-25.59	AVG	
3		2715.000	41.69	0.83	42.52	74.00	-31.48	peak	
4		2715.000	28.23	0.83	29.06	54.00	-24.94	AVG	
5		3110.000	41.65	2.10	43.75	74.00	-30.25	peak	
6		3110.000	28.55	2.10	30.65	54.00	-23.35	AVG	
7		3915.000	40.59	6.00	46.59	74.00	-27.41	peak	
8		3915.000	27.23	6.00	33.23	54.00	-20.77	AVG	
9		4645.000	39.33	7.12	46.45	74.00	-27.55	peak	
10		4645.000	26.48	7.12	33.60	54.00	-20.40	AVG	
11		5390.000	39.48	8.81	48.29	74.00	-25.71	peak	
12	*	5390.000	25.71	8.81	34.52	54.00	-19.48	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Playing+idle+speaker


## Horizontal

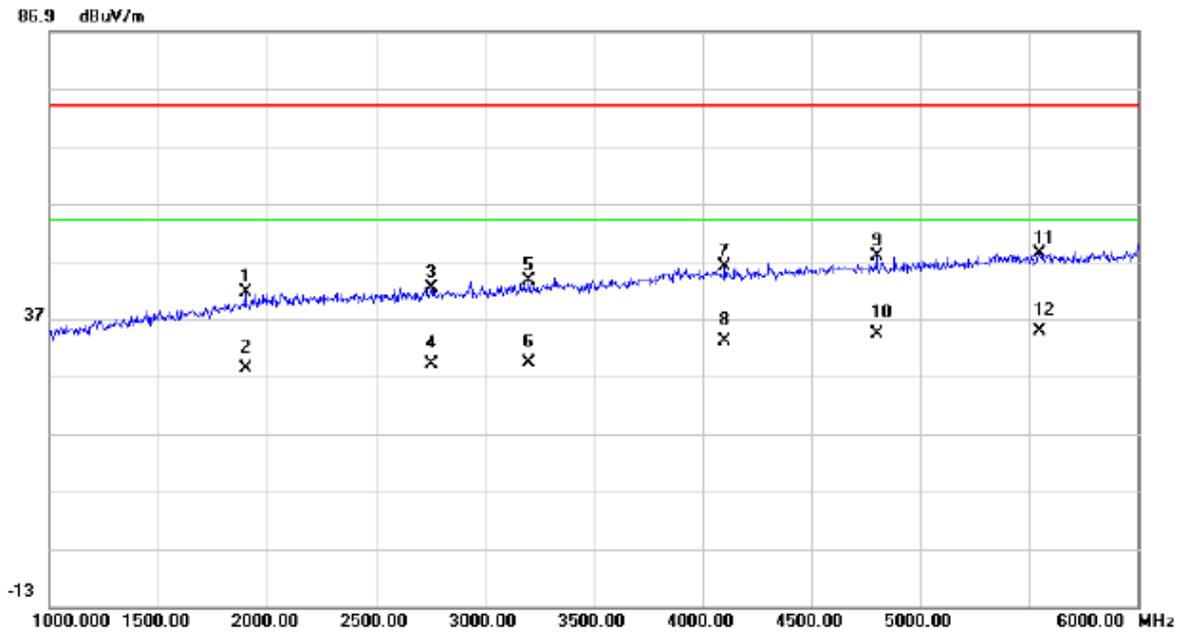

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1900.000	43.83	-2.31	41.52	74.00	-32.48	peak	
2		1900.000	30.64	-2.31	28.33	54.00	-25.67	AVG	
3		2755.000	41.41	0.98	42.39	74.00	-31.61	peak	
4		2755.000	28.17	0.98	29.15	54.00	-24.85	AVG	
5		3205.000	41.30	2.32	43.62	74.00	-30.38	peak	
6		3205.000	26.84	2.32	29.16	54.00	-24.84	AVG	
7		4105.000	39.35	6.69	46.04	74.00	-27.96	peak	
8		4105.000	26.38	6.69	33.07	54.00	-20.93	AVG	
9		4800.000	40.33	7.35	47.68	74.00	-26.32	peak	
10		4800.000	26.81	7.35	34.16	54.00	-19.84	AVG	
11		5550.000	39.20	9.20	48.40	74.00	-25.60	peak	
12	*	5550.000	25.55	9.20	34.75	54.00	-19.25	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle


## Vertical

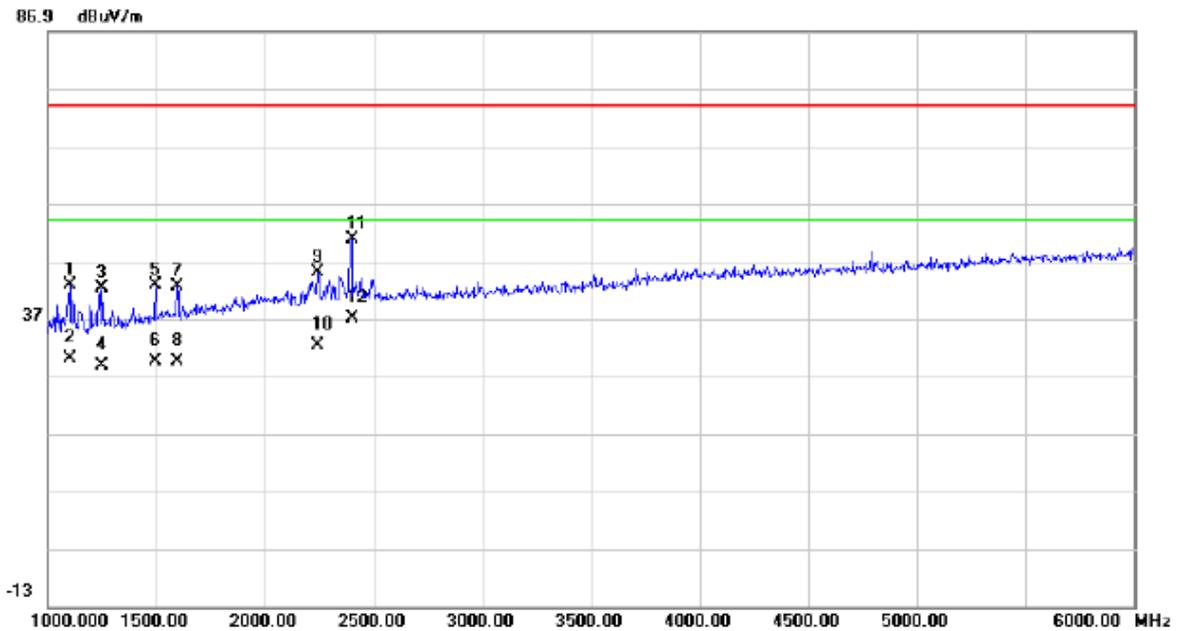

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1100.000	48.02	-5.24	42.78	74.00	-31.22	peak	
2		1100.000	35.27	-5.24	30.03	54.00	-23.97	AVG	
3		1250.000	47.01	-4.81	42.20	74.00	-31.80	peak	
4		1250.000	33.52	-4.81	28.71	54.00	-25.29	AVG	
5		1495.000	46.75	-4.08	42.67	74.00	-31.33	peak	
6		1495.000	33.62	-4.08	29.54	54.00	-24.46	AVG	
7		1595.000	46.10	-3.65	42.45	74.00	-31.55	peak	
8		1595.000	33.09	-3.65	29.44	54.00	-24.56	AVG	
9		2240.000	46.01	-0.94	45.07	74.00	-28.93	peak	
10		2240.000	33.12	-0.94	32.18	54.00	-21.82	AVG	
11		2400.000	51.02	-0.31	50.71	74.00	-23.29	peak	
12	*	2400.000	37.23	-0.31	36.92	54.00	-17.08	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle


## Horizontal

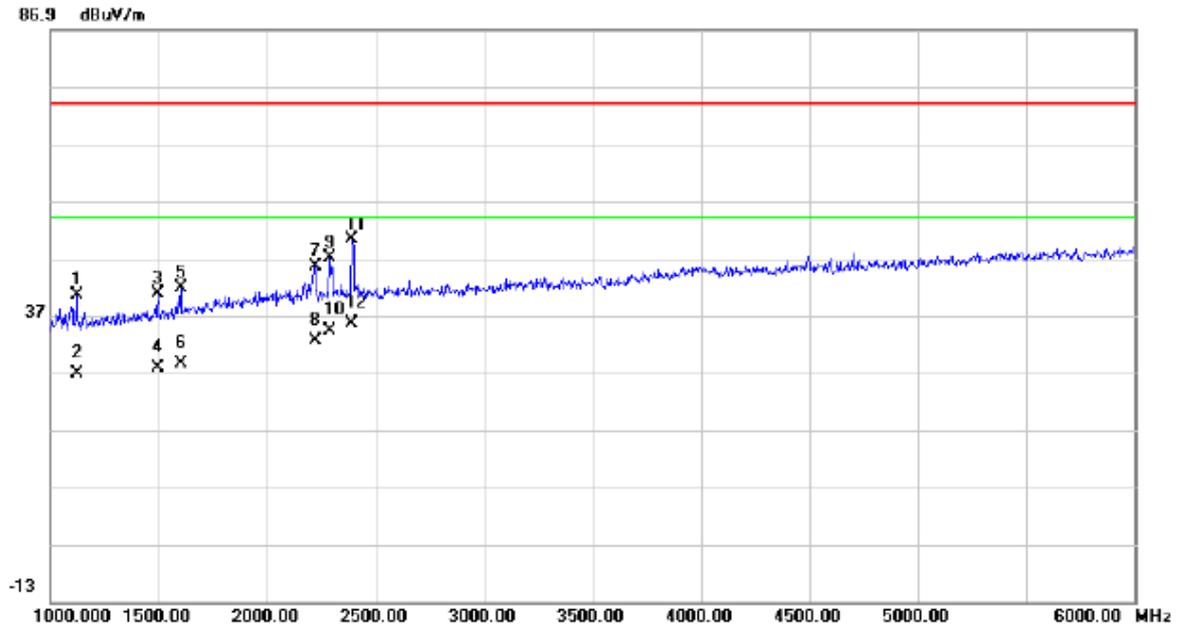

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1120.000	45.60	-5.18	40.42	74.00	-33.58	peak	
2		1120.000	32.00	-5.18	26.82	54.00	-27.18	AVG	
3		1495.000	44.93	-4.08	40.85	74.00	-33.15	peak	
4		1495.000	31.81	-4.08	27.73	54.00	-26.27	AVG	
5		1600.000	45.41	-3.63	41.78	74.00	-32.22	peak	
6		1600.000	32.07	-3.63	28.44	54.00	-25.56	AVG	
7		2220.000	46.58	-1.02	45.56	74.00	-28.44	peak	
8		2220.000	33.66	-1.02	32.64	54.00	-21.36	AVG	
9		2290.000	47.86	-0.74	47.12	74.00	-26.88	peak	
10		2290.000	35.05	-0.74	34.31	54.00	-19.69	AVG	
11		2390.000	50.55	-0.35	50.20	74.00	-23.80	peak	
12	*	2390.000	35.89	-0.35	35.54	54.00	-18.46	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


## Vertical

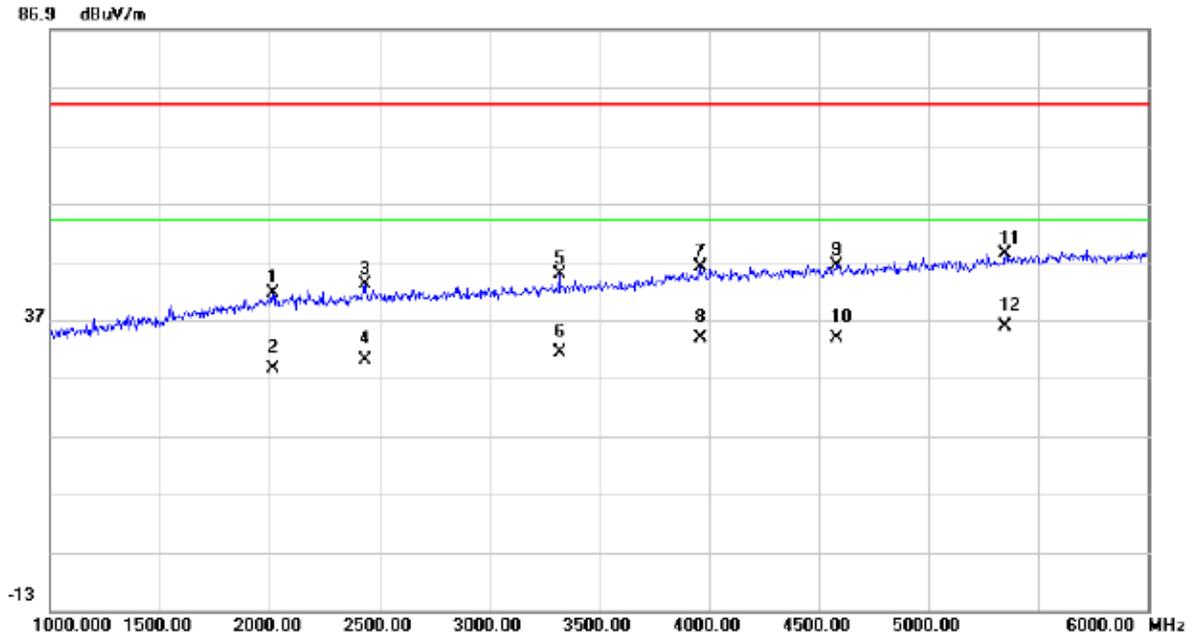

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2015.000	43.35	-1.82	41.53	74.00	-32.47	peak	
2	2015.000	30.25	-1.82	28.43	54.00	-25.57	AVG	
3	2435.000	43.12	-0.17	42.95	74.00	-31.05	peak	
4	2435.000	30.08	-0.17	29.91	54.00	-24.09	AVG	
5	3320.000	42.17	2.58	44.75	74.00	-29.25	peak	
6	3320.000	28.73	2.58	31.31	54.00	-22.69	AVG	
7	3960.000	39.75	6.33	46.08	74.00	-27.92	peak	
8	3960.000	27.38	6.33	33.71	54.00	-20.29	AVG	
9	4585.000	39.19	7.05	46.24	74.00	-27.76	peak	
10	4585.000	26.65	7.05	33.70	54.00	-20.30	AVG	
11	5350.000	39.62	8.69	48.31	74.00	-25.69	peak	
12 *	5350.000	27.19	8.69	35.88	54.00	-18.12	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


## Horizontal

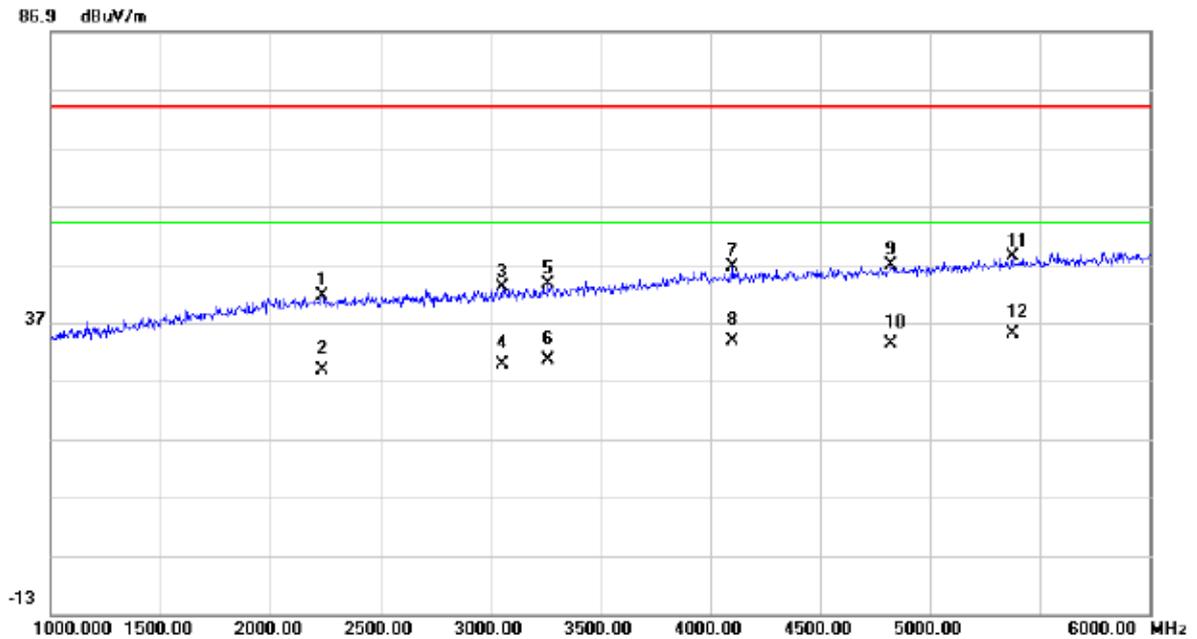

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2235.000	42.53	-0.96	41.57	74.00	-32.43	peak	
2		2235.000	29.63	-0.96	28.67	54.00	-25.33	AVG	
3		3055.000	41.01	1.97	42.98	74.00	-31.02	peak	
4		3055.000	27.73	1.97	29.70	54.00	-24.30	AVG	
5		3265.000	41.11	2.46	43.57	74.00	-30.43	peak	
6		3265.000	28.03	2.46	30.49	54.00	-23.51	AVG	
7		4105.000	39.88	6.69	46.57	74.00	-27.43	peak	
8		4105.000	27.09	6.69	33.78	54.00	-20.22	AVG	
9		4825.000	39.38	7.39	46.77	74.00	-27.23	peak	
10		4825.000	25.93	7.39	33.32	54.00	-20.68	AVG	
11		5375.000	39.44	8.77	48.21	74.00	-25.79	peak	
12	*	5375.000	26.18	8.77	34.95	54.00	-19.05	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


## Vertical

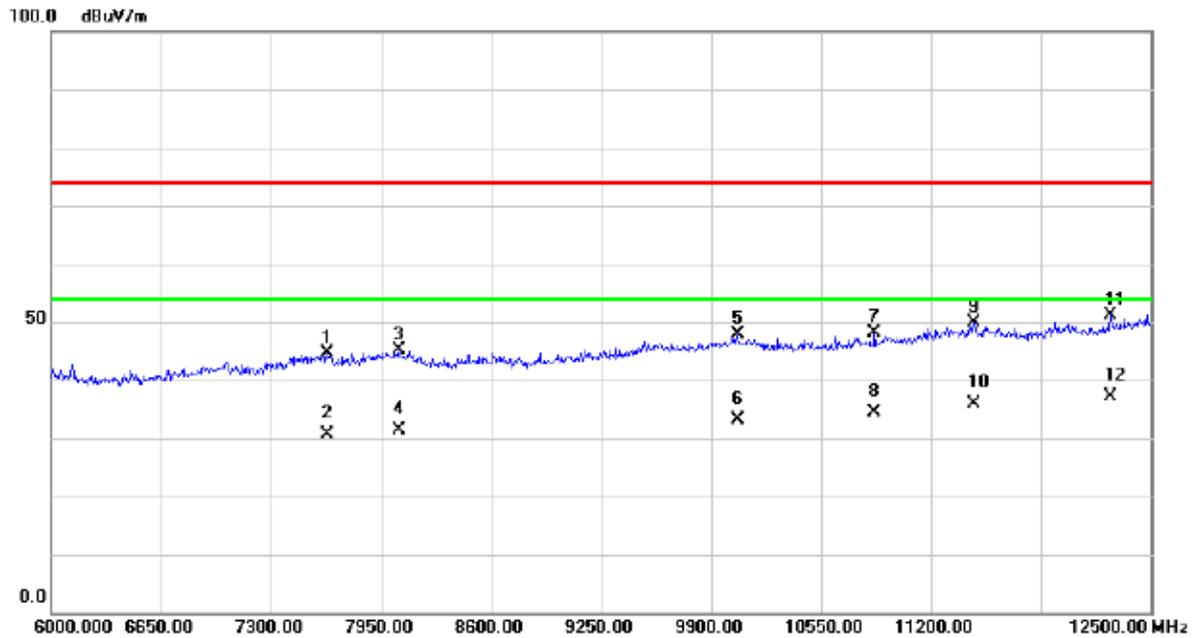

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		7631.500	28.62	16.01	44.63	74.00	-29.37	peak	
2		7631.500	14.52	16.01	30.53	54.00	-23.47	AVG	
3		8054.000	29.03	16.02	45.05	74.00	-28.95	peak	
4		8054.000	15.47	16.02	31.49	54.00	-22.51	AVG	
5		10056.00	31.99	15.83	47.82	74.00	-26.18	peak	
6		10056.00	17.35	15.83	33.18	54.00	-20.82	AVG	
7		10868.50	29.53	18.71	48.24	74.00	-25.76	peak	
8		10868.50	15.64	18.71	34.35	54.00	-19.65	AVG	
9		11453.50	29.74	20.16	49.90	74.00	-24.10	peak	
10		11453.50	15.84	20.16	36.00	54.00	-18.00	AVG	
11		12259.50	30.74	20.40	51.14	74.00	-22.86	peak	
12	*	12259.50	16.67	20.40	37.07	54.00	-16.93	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


## Horizontal

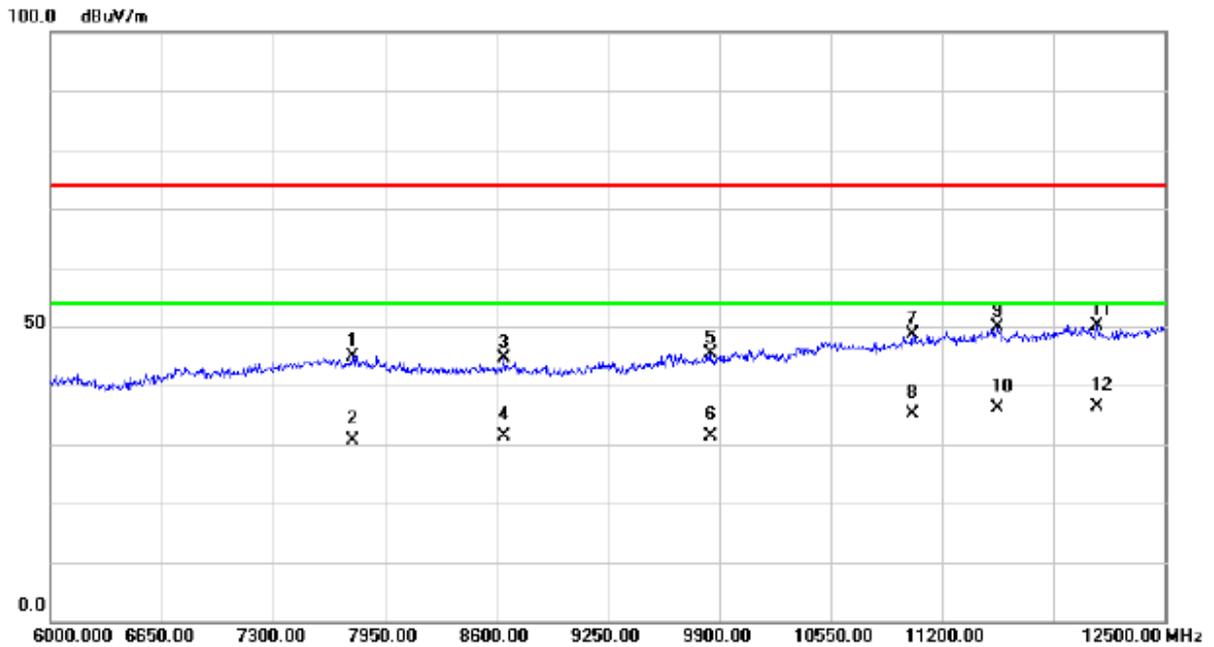

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7761.500	28.84	16.04	44.88	74.00	-29.12	peak	
2		7761.500	14.65	16.04	30.69	54.00	-23.31	AVG	
3		8645.500	29.11	15.62	44.73	74.00	-29.27	peak	
4		8645.500	15.84	15.62	31.46	54.00	-22.54	AVG	
5		9854.500	29.56	15.80	45.36	74.00	-28.64	peak	
6		9854.500	15.47	15.80	31.27	54.00	-22.73	AVG	
7		11031.00	28.34	20.38	48.72	74.00	-25.28	peak	
8		11031.00	14.63	20.38	35.01	54.00	-18.99	AVG	
9		11525.00	29.48	20.30	49.78	74.00	-24.22	peak	
10		11525.00	15.75	20.30	36.05	54.00	-17.95	AVG	
11		12103.50	28.00	22.16	50.16	74.00	-23.84	peak	
12	*	12103.50	14.25	22.16	36.41	54.00	-17.59	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


## Vertical

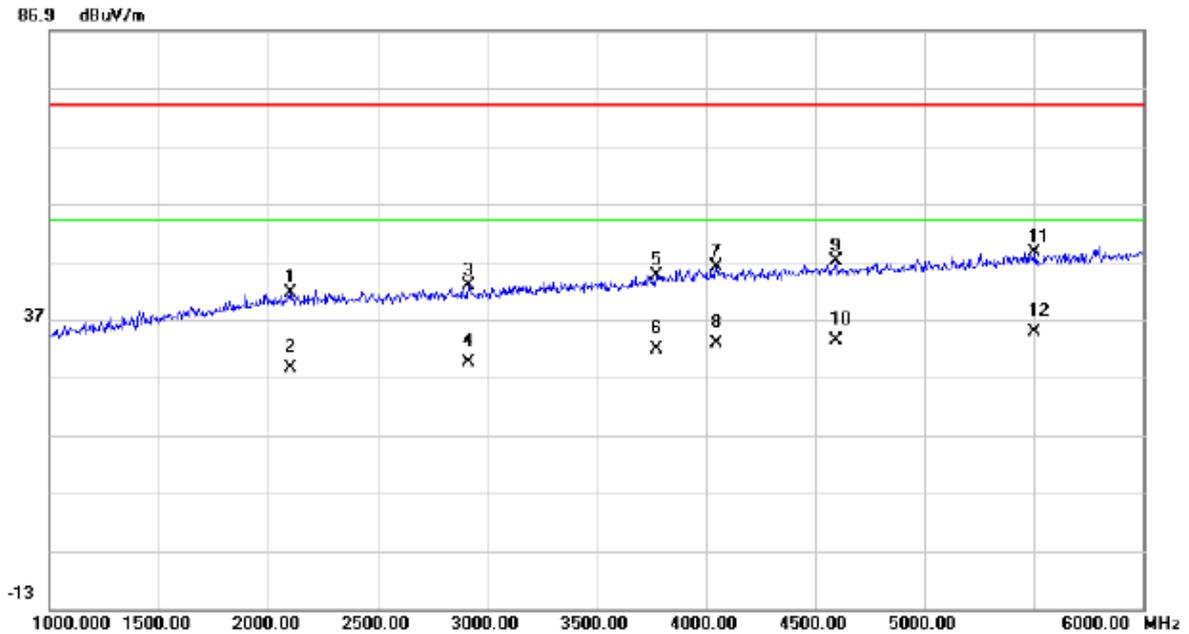

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2100.000	43.08	-1.49	41.59	74.00	-32.41	peak	
2		2100.000	29.99	-1.49	28.50	54.00	-25.50	AVG	
3		2915.000	41.20	1.54	42.74	74.00	-31.26	peak	
4		2915.000	28.00	1.54	29.54	54.00	-24.46	AVG	
5		3775.000	39.59	4.99	44.58	74.00	-29.42	peak	
6		3775.000	26.72	4.99	31.71	54.00	-22.29	AVG	
7		4050.000	39.48	6.65	46.13	74.00	-27.87	peak	
8		4050.000	26.18	6.65	32.83	54.00	-21.17	AVG	
9		4595.000	39.99	7.06	47.05	74.00	-26.95	peak	
10		4595.000	26.19	7.06	33.25	54.00	-20.75	AVG	
11		5505.000	39.41	9.15	48.56	74.00	-25.44	peak	
12	*	5505.000	25.65	9.15	34.80	54.00	-19.20	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


## Horizontal

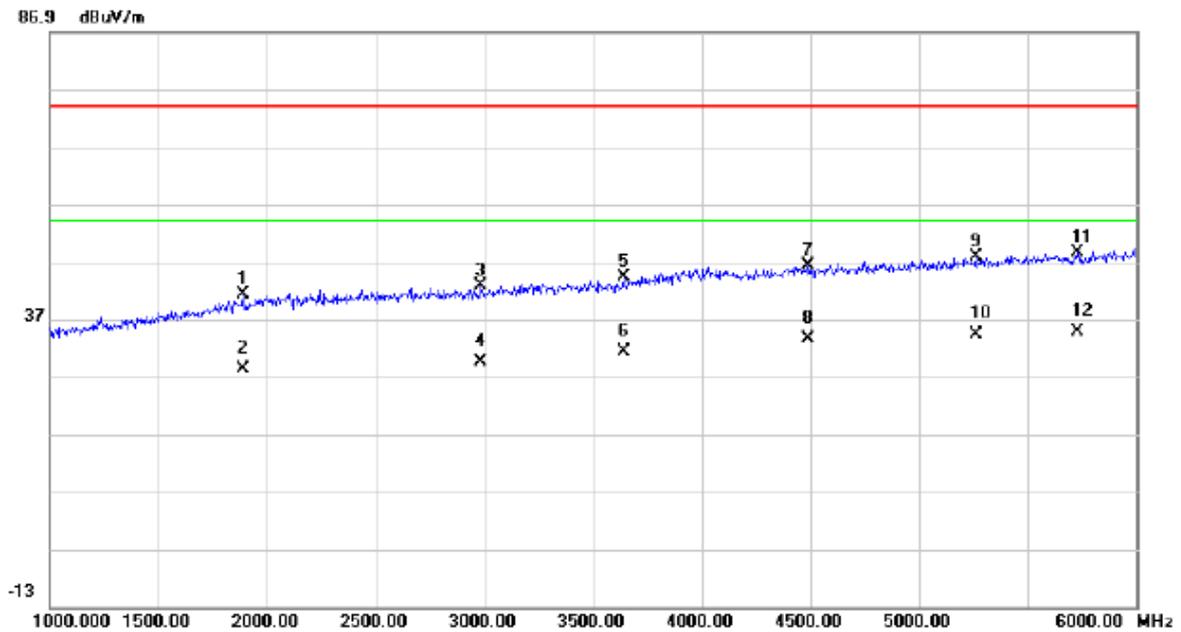

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1890.000	43.57	-2.36	41.21	74.00	-32.79	peak	
2		1890.000	30.70	-2.36	28.34	54.00	-25.66	AVG	
3		2980.000	41.00	1.78	42.78	74.00	-31.22	peak	
4		2980.000	27.71	1.78	29.49	54.00	-24.51	AVG	
5		3640.000	40.37	4.01	44.38	74.00	-29.62	peak	
6		3640.000	27.32	4.01	31.33	54.00	-22.67	AVG	
7		4490.000	39.31	6.92	46.23	74.00	-27.77	peak	
8		4490.000	26.68	6.92	33.60	54.00	-20.40	AVG	
9		5260.000	39.39	8.42	47.81	74.00	-26.19	peak	
10		5260.000	25.96	8.42	34.38	54.00	-19.62	AVG	
11		5730.000	39.20	9.41	48.61	74.00	-25.39	peak	
12	*	5730.000	25.47	9.41	34.88	54.00	-19.12	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK

## Vertical

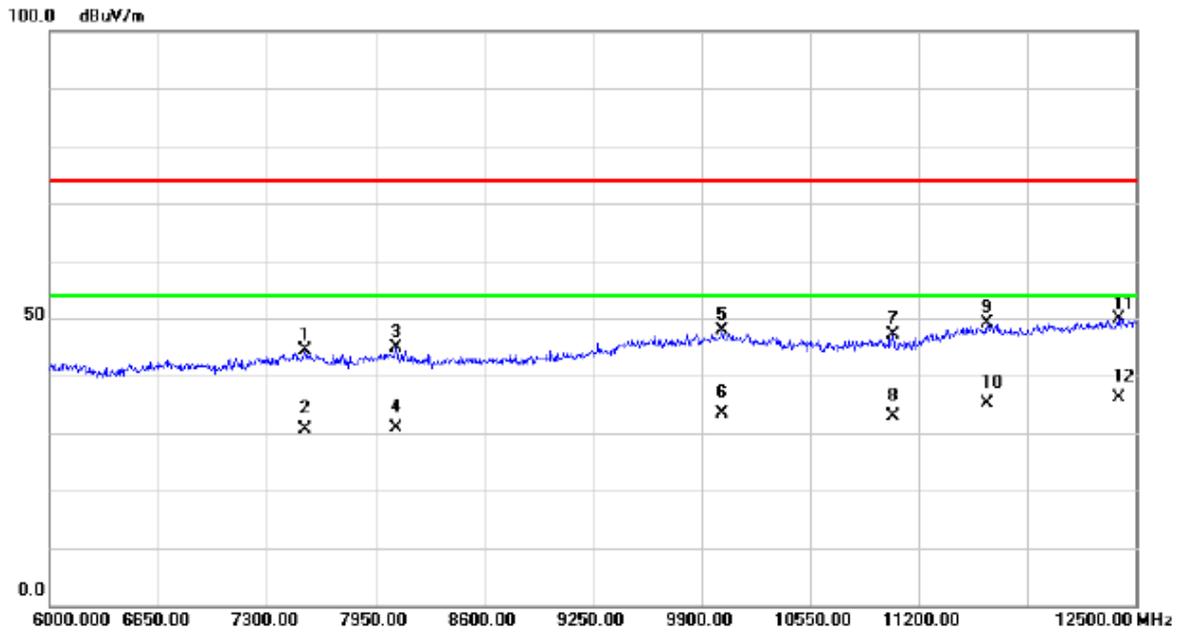

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7527.500	28.29	15.99	44.28	74.00	-29.72	peak	
2		7527.500	14.62	15.99	30.61	54.00	-23.39	AVG	
3		8073.500	28.78	15.99	44.77	74.00	-29.23	peak	
4		8073.500	14.84	15.99	30.83	54.00	-23.17	AVG	
5		10023.50	31.81	15.97	47.78	74.00	-26.22	peak	
6		10023.50	17.35	15.97	33.32	54.00	-20.68	AVG	
7		11050.50	26.83	20.36	47.19	74.00	-26.81	peak	
8		11050.50	12.64	20.36	33.00	54.00	-21.00	AVG	
9		11609.50	28.38	20.83	49.21	74.00	-24.79	peak	
10		11609.50	14.18	20.83	35.01	54.00	-18.99	AVG	
11		12396.00	31.13	18.85	49.98	74.00	-24.02	peak	
12	*	12396.00	17.35	18.85	36.20	54.00	-17.80	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


## Horizontal



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		7586.000	28.84	16.01	44.85	74.00	-29.15	peak	
2		7586.000	14.54	16.01	30.55	54.00	-23.45	AVG	
3		8060.500	28.74	16.01	44.75	74.00	-29.25	peak	
4		8060.500	14.20	16.01	30.21	54.00	-23.79	AVG	
5		10069.000	31.83	15.78	47.61	74.00	-26.39	peak	
6		10069.000	17.62	15.78	33.40	54.00	-20.60	AVG	
7		11057.000	27.68	20.36	48.04	74.00	-25.96	peak	
8		11057.000	13.84	20.36	34.20	54.00	-19.80	AVG	
9		11804.500	26.84	22.07	48.91	74.00	-25.09	peak	
10		11804.500	12.58	22.07	34.65	54.00	-19.35	AVG	
11		12448.000	32.05	18.27	50.32	74.00	-23.68	peak	
12	*	12448.000	18.22	18.27	36.49	54.00	-17.51	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


### Vertical

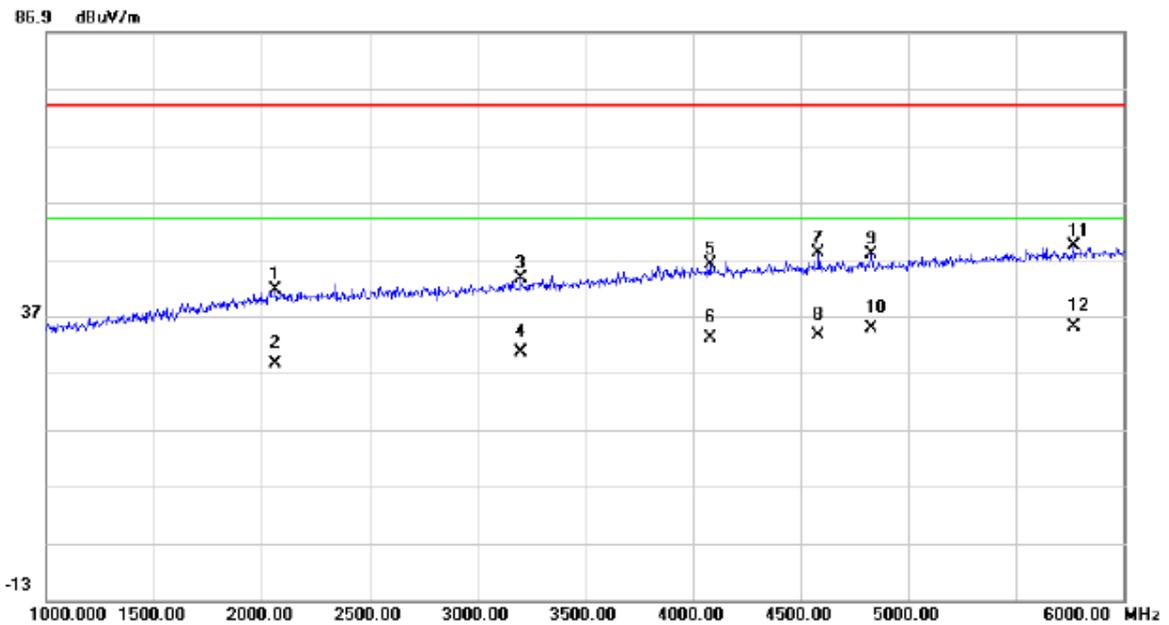

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2065.000	43.06	-1.63	41.43	74.00	-32.57	peak	
2		2065.000	30.09	-1.63	28.46	54.00	-25.54	AVG	
3		3200.000	41.12	2.31	43.43	74.00	-30.57	peak	
4		3200.000	28.10	2.31	30.41	54.00	-23.59	AVG	
5		4080.000	39.26	6.68	45.94	74.00	-28.06	peak	
6		4080.000	26.32	6.68	33.00	54.00	-21.00	AVG	
7		4585.000	40.91	7.05	47.96	74.00	-26.04	peak	
8		4585.000	26.49	7.05	33.54	54.00	-20.46	AVG	
9		4830.000	40.42	7.40	47.82	74.00	-26.18	peak	
10		4830.000	27.45	7.40	34.85	54.00	-19.15	AVG	
11		5770.000	39.73	9.48	49.21	74.00	-24.79	peak	
12	*	5770.000	25.61	9.48	35.09	54.00	-18.91	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


## Horizontal

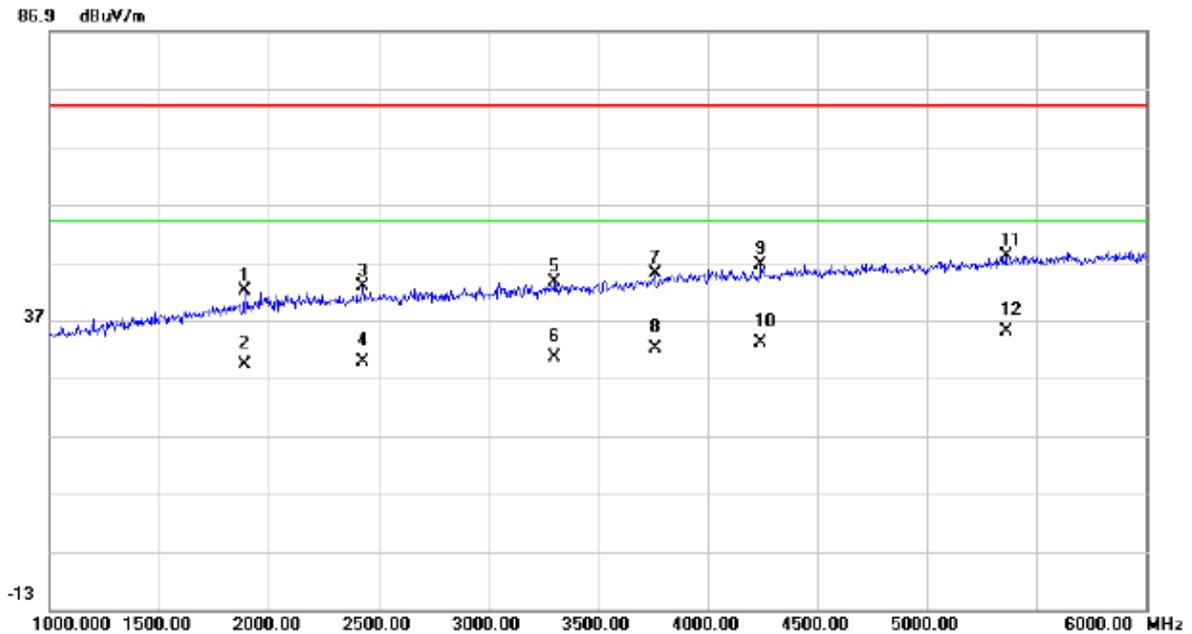

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1890.000	44.37	-2.36	42.01	74.00	-31.99	peak	
2		1890.000	31.55	-2.36	29.19	54.00	-24.81	AVG	
3		2430.000	43.03	-0.20	42.83	74.00	-31.17	peak	
4		2430.000	29.97	-0.20	29.77	54.00	-24.23	AVG	
5		3305.000	41.01	2.54	43.55	74.00	-30.45	peak	
6		3305.000	28.10	2.54	30.64	54.00	-23.36	AVG	
7		3760.000	40.19	4.88	45.07	74.00	-28.93	peak	
8		3760.000	27.10	4.88	31.98	54.00	-22.02	AVG	
9		4245.000	39.73	6.77	46.50	74.00	-27.50	peak	
10		4245.000	26.34	6.77	33.11	54.00	-20.89	AVG	
11		5360.000	39.35	8.72	48.07	74.00	-25.93	peak	
12	*	5360.000	26.21	8.72	34.93	54.00	-19.07	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


## Vertical

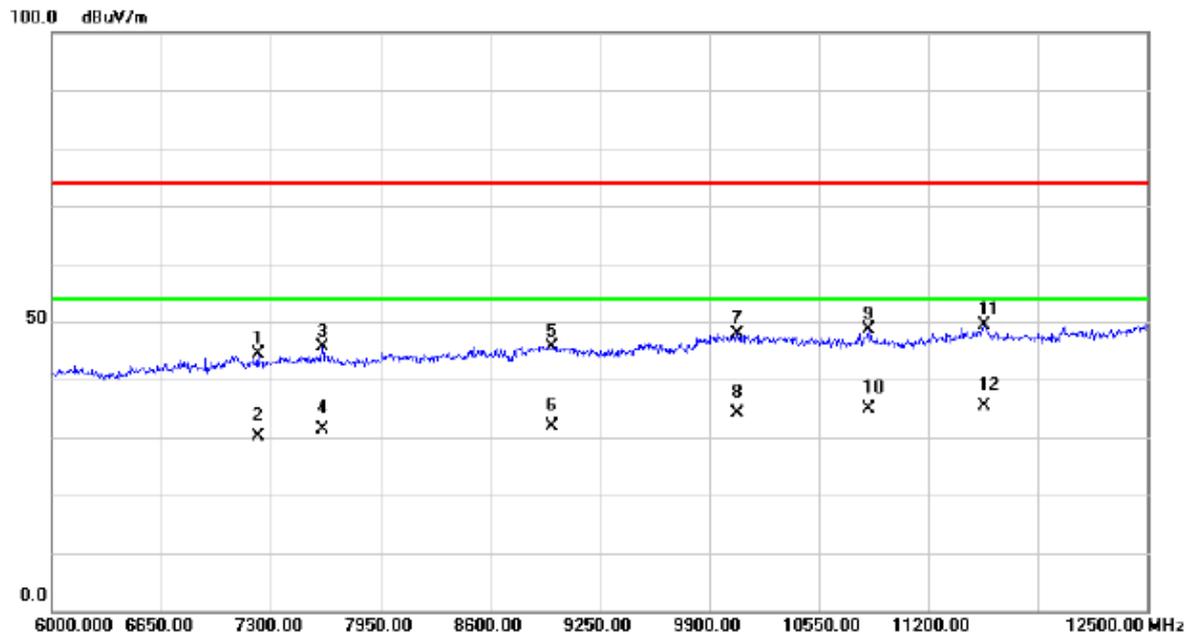

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7222.000	29.68	14.81	44.49	74.00	-29.51	peak	
2		7222.000	15.32	14.81	30.13	54.00	-23.87	AVG	
3		7605.500	29.66	16.01	45.67	74.00	-28.33	peak	
4		7605.500	15.28	16.01	31.29	54.00	-22.71	AVG	
5		8970.500	29.63	16.11	45.74	74.00	-28.26	peak	
6		8970.500	15.75	16.11	31.86	54.00	-22.14	AVG	
7		10069.000	32.12	15.78	47.90	74.00	-26.10	peak	
8		10069.000	18.34	15.78	34.12	54.00	-19.88	AVG	
9		10849.000	30.18	18.45	48.63	74.00	-25.37	peak	
10		10849.000	16.48	18.45	34.93	54.00	-19.07	AVG	
11		11531.500	29.04	20.35	49.39	74.00	-24.61	peak	
12	*	11531.500	15.02	20.35	35.37	54.00	-18.63	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG

## Horizontal

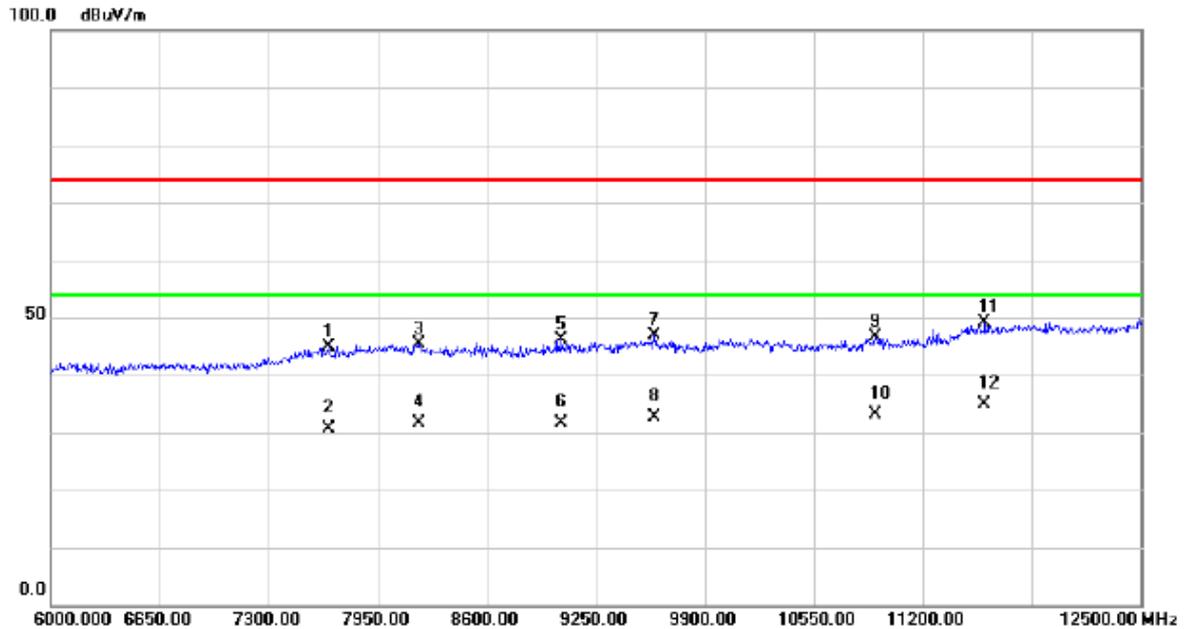

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		7657.500	28.75	16.02	44.77	74.00	-29.23	peak	
2		7657.500	14.62	16.02	30.64	54.00	-23.36	AVG	
3		8197.000	29.67	15.81	45.48	74.00	-28.52	peak	
4		8197.000	15.84	15.81	31.65	54.00	-22.35	AVG	
5		9048.500	29.98	16.06	46.04	74.00	-27.96	peak	
6		9048.500	15.46	16.06	31.52	54.00	-22.48	AVG	
7		9601.000	31.50	15.35	46.85	74.00	-27.15	peak	
8		9601.000	17.35	15.35	32.70	54.00	-21.30	AVG	
9		10920.500	27.31	19.37	46.68	74.00	-27.32	peak	
10		10920.500	13.84	19.37	33.21	54.00	-20.79	AVG	
11		11570.500	28.43	20.59	49.02	74.00	-24.98	peak	
12	*	11570.500	14.34	20.59	34.93	54.00	-19.07	AVG	