



FCC SAR Compliance Test Report

Product Name: Smart Phone

Model: HUAWEI RIO-L02, RIO-L02

Report No.: SYBH(Z-SAR)003062015-2

FCC ID: QISRIO-L02

	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	<i>Wei Huanbin</i>	<i>Gong Zhong</i>
DATE	2015-07-28	2015-07-28

The test results of this test report relate exclusively to the item(s) tested . The HUAWEI does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of HUAWEI.

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

Table of Contents

1	General Information.....	5
1.1	Statement of Compliance	5
1.2	RF exposure limits	6
1.3	EUT Description.....	7
1.3.1	General Description	8
1.3.2	Power reduction additional specification.....	10
1.4	Test specification(s).....	11
1.5	Testing laboratory	11
1.6	Applicant and Manufacturer	11
1.7	Application details	11
1.8	Ambient Condition.....	11
2	SAR Measurement System	12
2.1	SAR Measurement Set-up.....	12
2.2	Test environment	13
2.3	Data Acquisition Electronics description.....	13
2.4	Probe description	14
2.5	Phantom description	15
2.6	Device holder description	16
2.7	Test Equipment List	17
3	SAR Measurement Procedure	18
3.1	Scanning procedure.....	18
3.2	Spatial Peak SAR Evaluation	19
3.3	Data Storage and Evaluation.....	20
4	System Verification Procedure	22
4.1	Tissue Verification.....	22
4.2	System Check.....	26
4.3	System check Procedure	27
5	SAR measurement variability and uncertainty	28
5.1	SAR measurement variability	28
5.2	SAR measurement uncertainty.....	28
6	SAR Test Configuration.....	29
6.1	3G SAR Test Reduction Procedure	29
6.2	GSM Test Configuration	29
6.3	UMTS Test Configuration	29
6.4	LTE Test Configuration	36
6.5	WiFi Test Configuration	39
6.5.1	Initial Test Position Procedure	39
6.5.2	Initial Test Configuration Procedure	39
6.5.3	Sub Test Configuration Procedure	39
6.5.4	WiFi 2.4G SAR Test Procedures	40
7	SAR Measurement Results	41
7.1	Conducted power measurements.....	41
7.1.1	Conducted power measurements of GSM850(Second Antenna)	42
7.1.2	Conducted power measurements of GSM1900(Second Antenna)	43
7.1.3	Conducted power measurements of UMTS Band V(Second Antenna)	44
7.1.4	Conducted power measurements of LTE Band V(Second Antenna)	45
7.1.5	Conducted power measurements of LTE Band VII(Second Antenna)	47
7.1.6	Conducted power measurements of LTE Band XXXVIII(Second Antenna).....	49
7.1.7	Conducted power measurements of GSM850(Main Antenna).....	51
7.1.8	Conducted power measurements of GSM1900(Main Antenna).....	52
7.1.9	Conducted power measurements of UMTS Band V(Main Antenna).....	53
7.1.10	Conducted power measurements of LTE Band V(Main Antenna)	54
7.1.11	Conducted power measurements of LTE Band VII(Main Antenna)	56
7.1.12	Conducted power measurements of LTE Band XXXVIII(Main Antenna)	60
7.1.13	Conducted power measurements of WiFi 2.4G.....	62
7.1.14	Conducted power measurements of BT	63
7.2	SAR measurement Results	64
7.2.1	SAR measurement Result of GSM850(Second Antenna).....	66
7.2.2	SAR measurement Result of GSM1900(Second Antenna).....	68
7.2.3	SAR measurement Result of UMTS Band V(Second Antenna).....	71



7.2.4	SAR measurement Result of LTE Band V(Second Antenna)	73
7.2.5	SAR measurement Result of LTE Band VII(Second Antenna)	76
7.2.6	SAR measurement Result of LTE Band XXXVIII(Second Antenna)	79
7.2.7	SAR measurement Result of GSM850(Main Antenna)	81
7.2.8	SAR measurement Result of GSM1900(Main Antenna)	83
7.2.9	SAR measurement Result of UMTS Band V(Main Antenna)	88
7.2.10	SAR measurement Result of LTE Band V(Main Antenna)	90
7.2.11	SAR measurement Result of LTE Band VII(Main Antenna)	93
7.2.12	SAR measurement Result of LTE Band XXXVIII(Main Antenna)	99
7.2.13	SAR measurement Result of WiFi 2.4G	102
7.3	Multiple Transmitter Evaluation	104
7.3.1	Stand-alone SAR test exclusion	105
7.3.2	Simultaneous Transmission Possibilities	106
7.3.3	SAR Summation Scenario	107
7.3.4	Simultaneous Transmission Conclusion	108
	Appendix A. System Check Plots	109
	Appendix B. SAR Measurement Plots	109
	Appendix C. Calibration Certificate	109
	Appendix D. Photo documentation	109



※ ※ **Modified History** ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2015-07-28	Gong Zhong

1 General Information

1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for HUAWEI RIO-L02, RIO-L02 are as below Table 1.

Band	Max Reported SAR(W/kg)			
	1-g Head	1-g Body-worn (15mm) *	1-g Hotspot (10mm)	10-g Extremity (0mm)**
GSM850	0.46	0.35	0.47	/
GSM1900	0.99	0.46	1.32	2.25
UMTS Band V	0.54	0.35	0.42	/
LTE Band V	0.39	0.22	0.31	/
LTE Band VII	0.94	0.87	0.79	3.58
LTE Band XXXVIII	0.69	0.31	0.64	/
WiFi 2.4G	1.18	0.17	0.75	/
The highest simultaneous SAR value is 1.53 W/kg per KDB690783 D01				

Table 1: Summary of test result

Note:

1)* For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

2)** For 10-g Extremity operation, this device has been tested and meets the 10-g SAR limits of 4.0 W/kg for general population/ uncontrolled exposure according to ANSI C95.1:1992/IEEE C95.1:1991 and Industry Canada Radio Standards Specification RSS-102.

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2003 & IEEE Std 1528a-2005.

1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 W/kg	8.00 W/kg
Spatial Average SAR** (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

1.3 EUT Description

Device Information:			
Product Name:	Smart Phone		
Model:	HUAWEI RIO-L02, RIO-L02		
FCC ID :	QISRIO-L02		
SN No.:	UDK0115519000474(Battery 1#) UDK0115519000110(Battery 2#)		
Device Type :	Portable device		
Device Phase:	Identical Prototype		
Exposure Category:	Uncontrolled environment / general population		
Hardware Version :	HL1RIOL02M		
Software Version :	RIO-L02 C00B040		
Antenna Type :	Internal antenna		
Others Accessories	Headset		
Device Operating Configurations:			
Supporting Mode(s)	GSM850/1900, UMTS Band V, LTE Band V/VII/ XXXVIII, WiFi 2.4G(Tested);BT(Untested)		
Test Modulation	GSM(GMSK/8PSK),UMTS(QPSK),LTE(QPSK/16QAM), WiFi(DSSS/OFDM),BT(GFSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band V	824-849	869-894
	LTE Band V	824-849	869-894
	LTE Band VII	2500-2570	2620-2690
	LTE Band XXXVIII	2570-2620	2570-2620
	BT	2402-2480	
	WiFi 2.4G	2412-2462	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink:		4
	Max Number of Timeslots in Downlink:		4
	Max Total Timeslot:		5
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink:		4
	Max Number of Timeslots in Downlink:		4
	Max Total Timeslot:		5
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
Power Class:	4, tested with power level 5(GSM850)		
	1, tested with power level 0(GSM1900)		
	3, tested with power control "all 1"(UMTS Band V)		
	3, tested with power control all Max.(LTE Band V)		
	3, tested with power control all Max.(LTE Band VII)		
	3, tested with power control all Max.(LTE Band XXXVIII)		
Test Channels (low-mid-high):	128-190-251(GSM850)		
	512-661-810(GSM1900)		
	4132-4182-4233(UMTS Band V)		
	20407-20525-20643(LTE Band V BW=1.4MHz)		
	20415-20525-20635(LTE Band V BW=3MHz)		
	20425-20525-20625(LTE Band V BW=5MHz)		
	20450-20525-20600(LTE Band V BW=10MHz)		

Test Channels (low-mid-high):	20775-21100-21425(LTE Band VII BW=5MHz)
	20800-21100-21400(LTE Band VII BW=10MHz)
	20825-21100-21375(LTE Band VII BW=15MHz)
	20850-21100-21350(LTE Band VII BW=20MHz)
	37775-38000-38225(LTE Band XXXVIII BW=5MHz)
	37800-38000-38200(LTE Band XXXVIII BW=10MHz)
	37825-38000-38175(LTE Band XXXVIII BW=15MHz)
	37850-38000-38150(LTE Band XXXVIII BW=20MHz)
	802.11b/g/n 20M:1-6-11 (WiFi 2.4G)

Table 3:Device information and operating configuration

1.3.1 General Description

HUAWEI RIO-L02, RIO-L02 is subscriber equipment in the LTE/WCDMA/GSM system. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. The HSPA+/UMTS frequency band is Band I and Band V and Band VIII. The LTE frequency band is B1 and B3 and B5 and B7 and B8 and B28 and B38 and B40. But only GSM850 and GSM1900MHz and WCDMA B5 and LTE B5 and LTE B7 and LTE B38 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS and WIFI etc. Externally it provides SIM card interface (it can also used as micro SD card interface), earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

Battery information:

Name	Manufacture	Serials number	Description
Rechargeable Li-ion	Huawei Technologies Co., Ltd.	NA	Battery Model: HB396481EBC Rated capacity: 3000mAh NominalVoltage: $\text{---} +3.8\text{V}$ Charging Voltage: $\text{---} +4.35\text{V}$

Difference Descripition:

The mobile phone RIO-L01 and RIO-L02 are LTE/UMTS mobile phone with Bluetooth
 The differences between RIO-L01 and RIO-L02 are showed in the following table. Other parts of the mobile phone are the same, including the appearance, the antenna, Chipset, Bluetooth mode, Wifi mode, Adapter, Battery, Mainboard and so on.

	RIO-L01	RIO-L02
GSM four bands	the same	the same(SIM Card2 only support four GSM)
WCDMA bands	B1/B8	B1/B5/B8
LTE bands	B1/B3/B7/ B8/B20	B1/B3/B5/B7/ B8 /B28/B38/B40
FCC bands	GSM850/1900,LTE B7	GSM850/1900,W850 LTE B5/B7/B38
SIM card interface	ONE	TWO
External camera	the same	the same
internal camera	the same	the same
FLASH	the same	the same
Mainboard	the same	the same
PCB layout	the same	the same
Appearance	the same	the same
Bluetooth mode	the same	the same
WLAN mode	the same	the same
BT/ WLAN antenna	the same	the same
GSM/ WCDMA /LTE antenna	the same	Only change the matching of the Second antenna in GSM850
Adapter	the same	the same
Battery	the same	the same
Chipset	the same	the same
Memory	the same	the same
RF Parameter	The same RF Parameter in the same band	The same RF Parameter in the same band
Dimension	the same	the same
Main Frequency NV	The same NV in the same band	The same NV in the same band

Note: According to the difference description above, for GSM850(Second Antenna) , UMTS Band V and LTE Band V/XXXVIII , new full SAR test is performed on RIO-L02; For the other same frequency bands, RIO-L02 SAR is tested at the worst position of RIO-L01(report No.: SYBH(Z-SAR)004052015-2) for each frequency band and each RF exposure condition.

1.3.2 Power reduction additional specification

The device uses a single fixed level of power reduction through static table look-up for SAR compliance and it is triggered by a single event or operation:

1) A fixed level power reduction is applied for some frequency bands and antennas when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered.

Item	Description
Supporting power reduction or not	Yes
Frequency Band(s) using Hotspot power reduction	GSM850/1900 and LTE Band VII (Main antenna)
Power reduction feature	A fixed power reduction is applied when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered.
Triggering conditions	Only hotspot mode (wireless routing) and nothing else is used to trigger this power reduction.
Full power and reduced power specifications	Refer to Section 7.1 for details
All simultaneous voice and data transmissions combinations and considerations	Refer to Section 7.3 for details

2) A fixed level power reduction is applied for WiFi band when simultaneously transmitting with the Second antenna in simultaneous transmission conditions. The standalone SAR compliance still uses the standalone SAR results tested at the maximum output power level without any power reduction.

Band\Config.	Power Reduciton (dB)	
	Full Power	GSM/LTE Second antenna +WiFi antenna Simultaneous Transmission
WiFi 802.11b	0	2.5
WiFi 802.11g	0	0
WiFi 802.11n	0	0

The detailed full power and reduced tune-up specifications and conducted power measurement results are provided in Section 7.1 of this report.

1.4 Test specification(s)

ANSI Std C95.1-1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.(IEEE Std C95.1-1991)
IEEE Std 1528-2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE Std 1528a-2005	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 5 of March 2015)
KDB941225 D01	3G SAR Procedures v03
KDB941225 D05	SAR for LTE Devices v02r03
KDB941225 D06	Hotspot SAR v02
KDB447498 D01	General RF Exposure Guidance v05r02
KDB648474 D04	Handsets SAR v01r02
KDB248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r01
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r03
KDB865664 D02	SAR Reporting v01r01
KDB690783 D01	SAR Listings on Grants v01r03

1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Zone G1,Huawei Industrial Base, Bantian Industry Area, Longgang District, Shenzhen, Guangdong, China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT #2174.01

1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.7 Application details


Start Date of test	2015-07-04
End Date of test	2015-07-22

1.8 Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2 SAR Measurement System

2.1 SAR Measurement Set-up

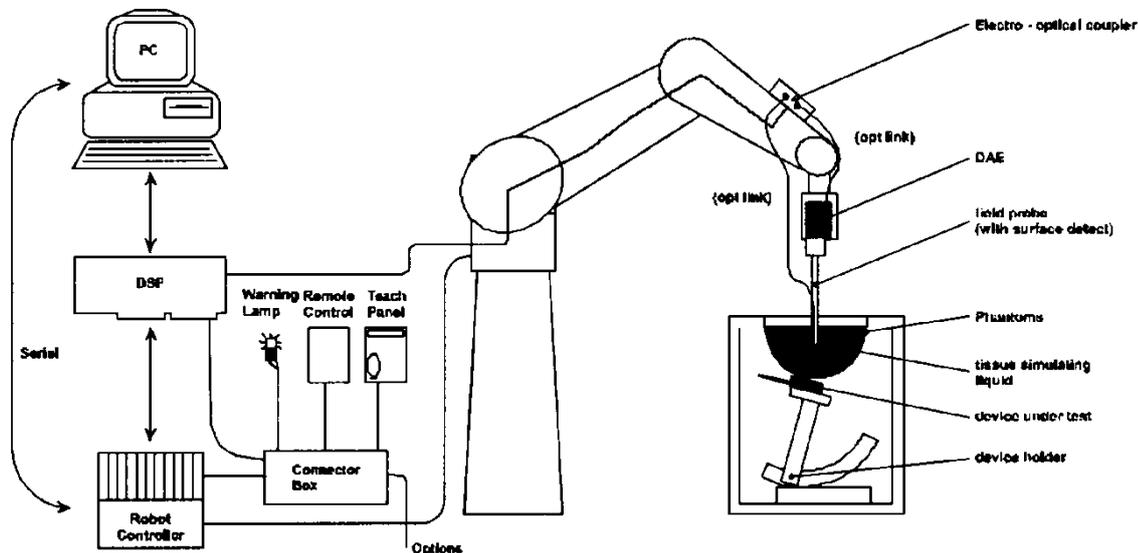

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

2.2 Test environment

The DASY5 measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.

The system allows the measurement of SAR values larger than 0.005 mW/g.

2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.


DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	

2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (± 2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

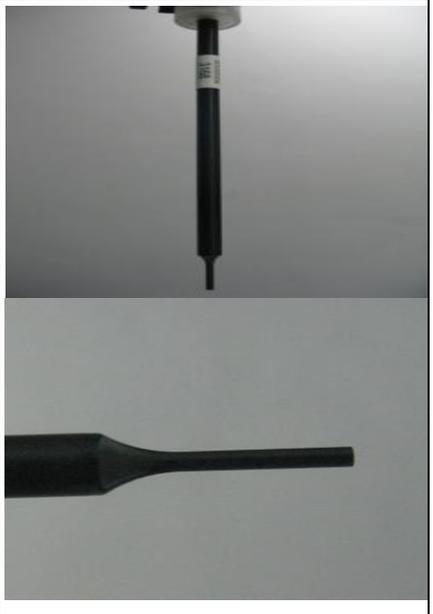Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	


2.5 Phantom description

SAM Twin Phantom

Shell Thickness	2mm±0.2mm;The ear region:6.0±0.2mm	
Filling Volume	Approximately 25 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

The following figure shows the definition of reference point:

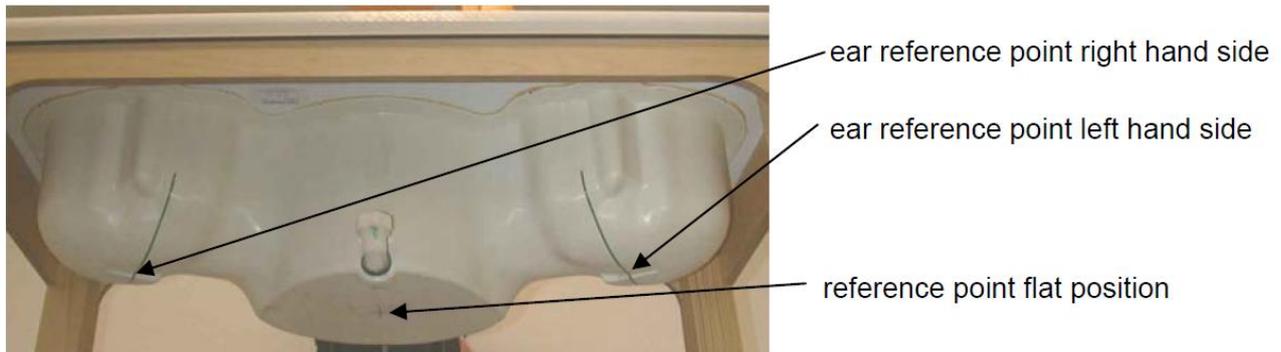

ELI4 Phantom

Shell Thickness	2mm±0.2mm	
Filling Volume	Approximately 30 liters	
Dimensions	Major axis:600mm; Minor axis:400mm;	
Measurement Areas	Flat phantom	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity $2 \leq \epsilon_r \leq 5$ at ≤ 3 GHz, $3 \leq \epsilon_r \leq 4$ at >3 GHz and a loss tangent ≤ 0.05 .

2.6 Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\sigma = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The device holder permits the device to be positioned with a tolerance of $\pm 1^\circ$ in the tilt angle.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

	Manufacturer	Device	Type	Serial number	Date of last calibration	Valid period
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	7350	2015-01-08	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3744	2014-07-24	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3736	2015-04-30	One year
<input checked="" type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d059	2013-05-02	Three years
<input checked="" type="checkbox"/>	SPEAG	1900 MHz Dipole	D1900V2	5d143	2014-09-23	Three years
<input type="checkbox"/>	SPEAG	2300 MHz Dipole	D2300V2	1016	2014-11-19	Three years
<input checked="" type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	860	2014-11-19	Three years
<input checked="" type="checkbox"/>	SPEAG	2600 MHz Dipole	D2600V2	1021	2014-07-16	Three years
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	852	2015-11-13	One year
<input checked="" type="checkbox"/>	SPEAG	Software	DASY 5	N/A	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM1	TP-1475	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM2	TP-1474	NCR	NCR
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM3	TP-1597	NCR	NCR
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM4	TP-1620	NCR	NCR
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1038	NCR	NCR
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1111	NCR	NCR
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	113989	2015-05-18	One year
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMW 500	126855	2015-07-02	One year
<input checked="" type="checkbox"/>	Agilent	Network Analyser	E5071C	MY46213349	2015-02-13	One year
<input checked="" type="checkbox"/>	Agilent	Dielectric Probe Kit	85070E	2484	NCR	NCR
<input checked="" type="checkbox"/>	Agilent	Signal Generator	N5181A	MY47420989	2015-01-07	One year
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1402001	NCR	NCR
<input checked="" type="checkbox"/>	AR	Directional Coupler	DC7144M1	0423264	2015-03-31	One year
<input checked="" type="checkbox"/>	R & S	Power Meter	NRP	100740	2015-07-02	One year
<input checked="" type="checkbox"/>	R & S	Power Meter Sensor	NRP-Z11	106288	2015-07-02	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4417A	MY45101339	2015-01-07	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY44420359	2015-01-07	One year

Note:

1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

a) There is no physical damage on the dipole;

System check with specific dipole is within 10% of calibrated value;

The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.

The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

3 SAR Measurement Procedure

3.1 Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: Δx_{zoom} , $\Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$, 2-4GHz - $\leq 5\text{ mm}$ and 4-6 GHz- $\leq 4\text{mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$, 3-4 GHz- $\leq 4\text{mm}$ and 4-6GHz- $\leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximun Zoom Scan spatial resolution ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥22mm

3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points(with 8mm horizontal resolution) or 7 x 7 x 7 points(with 5mm horizontal resolution) or 8 x 8 x 7 points(with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensates boundary effects on E-field probes.

3.3 Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a ₁₀ , a ₁₁ , a ₁₂
	- Conversion factor	ConvF _i
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcpi$$

with	V _i	= compensated signal of channel i	(i = x, y, z)
	U _i	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field (DASY parameter)	
	dcpi	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\begin{aligned}
 \text{E-field probes:} & \quad E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2} \\
 \text{H-field probes:} & \quad H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f
 \end{aligned}$$

with V_i = compensated signal of channel i (i = x, y, z)
 Norm_i = sensor sensitivity of channel i (i = x, y, z)
 [mV/(V/m)²] for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{\text{tot}}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \quad \text{or} \quad P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

4 System Verification Procedure

4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)		Head Tissue				
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	39.2	41.45	52.64	55.242	62.7	55.242
Salt (NaCl)	2.7	1.45	0.36	0.306	0.5	0.306
Sugar	57.0	56.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	44.542	36.8	44.452
Ingredients (% of weight)		Body Tissue				
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	50.3	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M Ω + resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r (+/-5%)	σ (S/m) (+/-5%)	ϵ_r	σ (S/m)		
835H	825	41.60 (39.52~43.68)	0.90 (0.86~0.95)	40.13	0.882	21.4°C	2015-07-04
	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	39.91	0.891		
	850	41.50 (39.43~43.58)	0.92 (0.87~0.96)	39.72	0.907		
835H	825	41.60 (39.52~43.68)	0.90 (0.86~0.95)	43.08	0.906	21.7°C	2015-07-12
	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	42.97	0.914		
	850	41.50 (39.43~43.58)	0.92 (0.87~0.96)	42.87	0.926		
835H	825	41.60 (39.52~43.68)	0.90 (0.86~0.95)	40.37	0.893	21.7°C	2015-07-17
	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	40.32	0.894		
	850	41.50 (39.43~43.58)	0.92 (0.87~0.96)	40.21	0.906		
835B	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.34	0.945	21.7°C	2015-07-10
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.17	0.954		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	54.07	0.974		
835B	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	56.05	0.979	21.6°C	2015-07-17
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	55.95	0.989		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	55.78	1.005		
1900H	1850	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.28	1.360	21.5°C	2015-07-08
	1880	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.18	1.389		
	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.11	1.408		
	1910	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.05	1.423		
1900H	1850	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.98	1.361	21.5°C	2015-07-22
	1880	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.85	1.391		
	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.78	1.412		
	1910	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.73	1.420		

1900B	1850	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.40	1.502	21.5°C	2015-07-07
	1880	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.40	1.538		
	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.36	1.553		
	1910	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.32	1.563		
2450H	2410	39.30 (37.34~41.26)	1.76 (1.67~1.85)	39.02	1.833	21.2°C	2015-07-15
	2435	39.20 (37.24~41.16)	1.79 (1.70~1.88)	38.92	1.861		
	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	38.87	1.877		
	2460	39.20 (37.24~41.16)	1.81 (1.72~1.90)	38.83	1.888		
2450B	2410	52.80 (50.16~55.44)	1.91 (1.81~2.00)	51.73	1.886	22.0°C	2015-07-20
	2435	52.70 (50.07~55.34)	1.94 (1.84~2.04)	51.66	1.919		
	2450	52.70 (50.07~55.34)	1.95 (1.85~2.05)	51.64	1.939		
	2460	52.70 (50.07~55.34)	1.96 (1.86~2.06)	51.57	1.946		
2600H	2510	39.12 (37.16~41.01)	1.86 (1.77~1.96)	39.12	1.922	21.8°C	2015-07-08
	2535	39.1 (37.13~41.04)	1.89 (1.80~1.98)	39.00	1.950		
	2560	39 (37.05~40.95)	1.917 (1.82~2.01)	38.89	1.980		
	2600	39 (37.05~40.95)	1.96 (1.86~2.05)	38.77	2.024		
2600H	2510	39.12 (37.16~41.01)	1.86 (1.77~1.96)	38.77	1.908	21.8°C	2015-07-14
	2535	39.1 (37.13~41.04)	1.89 (1.80~1.98)	38.65	1.937		
	2560	39 (37.05~40.95)	1.917 (1.82~2.01)	38.57	1.963		
	2600	39 (37.05~40.95)	1.96 (1.86~2.05)	38.44	2.015		
2600H	2510	39.12 (37.16~41.01)	1.86 (1.77~1.96)	38.39	1.878	21.7°C	2015-07-18
	2535	39.1 (37.13~41.04)	1.89 (1.80~1.98)	38.29	1.900		
	2560	39 (37.05~40.95)	1.917 (1.82~2.01)	38.18	1.931		
	2600	39 (37.05~40.95)	1.96 (1.86~2.05)	38.05	1.977		

2600B	2510	52.62 (49.99~55.25)	2.03 (1.93~2.13)	51.44	2.058	21.3°C	2015-07-09
	2535	52.59 (49.96~55.22)	2.07 (1.97~2.17)	51.33	2.090		
	2560	52.57 (49.94~55.20)	2.09 (1.99~2.19)	51.24	2.125		
	2600	52.5 (49.88~55.13)	2.16 (2.05~2.27)	51.09	2.184		
ϵ_r = Relative permittivity, σ = Conductivity							

Table 5: Measured Tissue Parameter

Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

4.2 System Check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests(Graphic Plot(s) see Appendix A).


System Check	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)		
835MHz Head	9.49 (8.54~10.44)	6.18 (5.56~6.80)	9.36	6.04	21.4°C	2015-07-04
835MHz Head	9.49 (8.54~10.44)	6.18 (5.56~6.80)	9.64	6.36	21.7°C	2015-07-12
835MHz Head	9.49 (8.54~10.44)	6.18 (5.56~6.80)	9.44	6.16	21.7°C	2015-07-17
1900MHz Head	40.80 (36.72~44.88)	21.40 (19.26~23.54)	44.40	22.96	21.5°C	2015-07-08
1900MHz Head	40.80 (36.72~44.88)	21.40 (19.26~23.54)	41.60	21.60	21.5°C	2015-07-22
2450MHz Head	52.30 (47.07~57.53)	24.50 (22.05~26.95)	56.40	26.40	21.2°C	2015-07-15
2600MHz Head	58.6 (52.74~64.46)	26.2 (23.58~28.82)	59.60	26.44	21.8°C	2015-07-08
2600MHz Head	58.6 (52.74~64.46)	26.2 (23.58~28.82)	62.80	28.28	21.8°C	2015-07-14
2600MHz Head	58.6 (52.74~64.46)	26.2 (23.58~28.82)	61.60	27.76	21.7°C	2015-07-18
835MHz Body	9.42 (8.48~10.36)	6.19 (5.57~6.80)	10.12	6.72	21.7°C	2015-07-10
835MHz Body	9.42 (8.48~10.36)	6.19 (5.57~6.80)	9.96	6.64	21.6°C	2015-07-17
1900MHz Body	40.20 (36.18~44.22)	21.30 (19.17~23.43)	40.80	21.12	21.5°C	2015-07-07
2450MHz Body	51.4 (46.26~56.54)	23.9 (21.51~26.29)	53.20	24.92	22.0°C	2015-07-20
2600MHz Body	57.6 (51.84~63.36)	25.5 (22.95~28.05)	61.60	27.20	21.3°C	2015-07-09
2600MHz Body	57.6 (51.84~63.36)	25.5 (22.95~28.05)	59.60	26.68	21.3°C	2015-07-09

Table 6: System Check Results

4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW(below 5GHz) or 100mW(above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

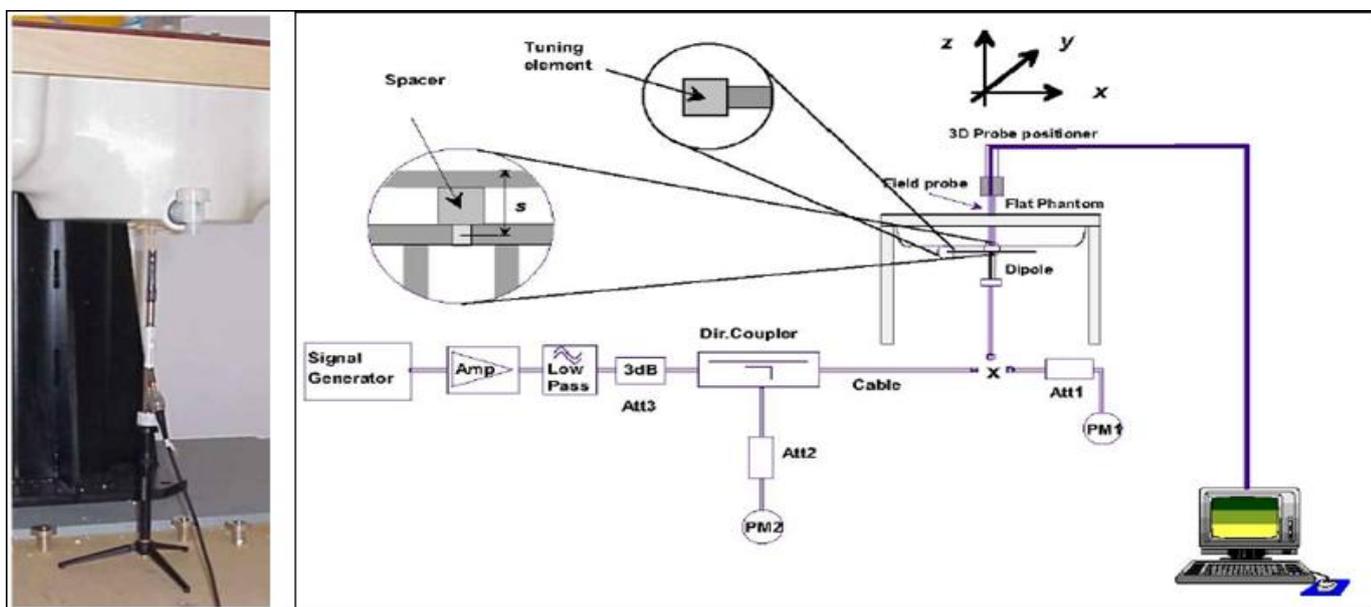

5 SAR measurement variability and uncertainty

5.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r03, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.

5.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2003 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6 SAR Test Configuration

6.1 3G SAR Test Reduction Procedure

Per KDB941225 D01v03, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

6.2 GSM Test Configuration

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power level is set to “5” and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

6.3 UMTS Test Configuration

1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) WCDMA

a. Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.

b. Body SAR Measurements

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode

3) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

Per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when ΔACK , $\Delta NACK$, $\Delta CQI = 8$. The variation of the β_c / β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test [Ⓢ]	β_c [Ⓢ]	β_d [Ⓢ]	β_d (SF) [Ⓢ]	β_c / β_d [Ⓢ]	β_{hs} (1) [Ⓢ]	CM(dB)(2) [Ⓢ]	MPR (dB) [Ⓢ]
1 [Ⓢ]	2/15 [Ⓢ]	15/15 [Ⓢ]	64 [Ⓢ]	2/15 [Ⓢ]	4/15 [Ⓢ]	0.0 [Ⓢ]	0 [Ⓢ]
2 [Ⓢ]	12/15(3) [Ⓢ]	15/15(3) [Ⓢ]	64 [Ⓢ]	12/15(3) [Ⓢ]	24/15 [Ⓢ]	1.0 [Ⓢ]	0 [Ⓢ]
3 [Ⓢ]	15/15 [Ⓢ]	8/15 [Ⓢ]	64 [Ⓢ]	15/8 [Ⓢ]	30/15 [Ⓢ]	1.5 [Ⓢ]	0.5 [Ⓢ]
4 [Ⓢ]	15/15 [Ⓢ]	4/15 [Ⓢ]	64 [Ⓢ]	15/4 [Ⓢ]	30/15 [Ⓢ]	1.5 [Ⓢ]	0.5 [Ⓢ]

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs} / \beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ [Ⓢ]
 Note 2 : CM=1 for $\beta_c / \beta_d = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.[Ⓢ]
 Note 3 : For subtest 2 the β_c / β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$ [Ⓢ]

Table 7: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 8:settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 9:HSDPA UE category

4) HSUPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

Per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Device' sections of 3G device.

Sub-test [⊃]	β_c [⊃]	β_d [⊃]	β_d (SF) [⊃]	β_c/β_d [⊃]	$\beta_{hs}^{(1)}$ [⊃]	β_{ec} [⊃]	β_{ed} [⊃]	β_e ^{c⊃} (SF) [⊃]	β_{ed} ^{c⊃} (code) [⊃]	CM ⁽²⁾ [⊃] (dB) [⊃]	MP R [⊃] (dB) [⊃]	AG ⁽⁴⁾ [⊃] Index [⊃]	E-TFC I [⊃]
1 [⊃]	11/15 ⁽³⁾ [⊃]	15/15 ⁽³⁾ [⊃]	64 [⊃]	11/15 ⁽³⁾ [⊃]	22/15 [⊃]	209/225 [⊃]	1039/225 [⊃]	4 [⊃]	1 [⊃]	1.0 [⊃]	0.0 [⊃]	20 [⊃]	75 [⊃]
2 [⊃]	6/15 [⊃]	15/15 [⊃]	64 [⊃]	6/15 [⊃]	12/15 [⊃]	12/15 [⊃]	94/75 [⊃]	4 [⊃]	1 [⊃]	3.0 [⊃]	2.0 [⊃]	12 [⊃]	67 [⊃]
3 [⊃]	15/15 [⊃]	9/15 [⊃]	64 [⊃]	15/9 [⊃]	30/15 [⊃]	30/15 [⊃]	$\beta_{ed1}:47/15$ [⊃] $\beta_{ed2}:47/15$ [⊃]	4 [⊃]	2 [⊃]	2.0 [⊃]	1.0 [⊃]	15 [⊃]	92 [⊃]
4 [⊃]	2/15 [⊃]	15/15 [⊃]	64 [⊃]	2/15 [⊃]	4/15 [⊃]	2/15 [⊃]	56/75 [⊃]	4 [⊃]	1 [⊃]	3.0 [⊃]	2.0 [⊃]	17 [⊃]	71 [⊃]
5 [⊃]	15/15 ⁽⁴⁾ [⊃]	15/15 ⁽⁴⁾ [⊃]	64 [⊃]	15/15 ⁽⁴⁾ [⊃]	30/15 [⊃]	24/15 [⊃]	134/15 [⊃]	4 [⊃]	1 [⊃]	1.0 [⊃]	0.0 [⊃]	21 [⊃]	81 [⊃]
Note 1: $\Delta ACK, \Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference [⊃] Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$ [⊃] Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$ [⊃] Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g [⊃] Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value. [⊃]													

Table 10:Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).

Table 11:HSUPA UE category

5) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/lor	dB	-10
P-CCPCH and SCH_Ec/lor	dB	-12
PICH_Ec/lor	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/lor	dB	-5
OCNS_Ec/lor	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 12: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

- 1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
- 2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

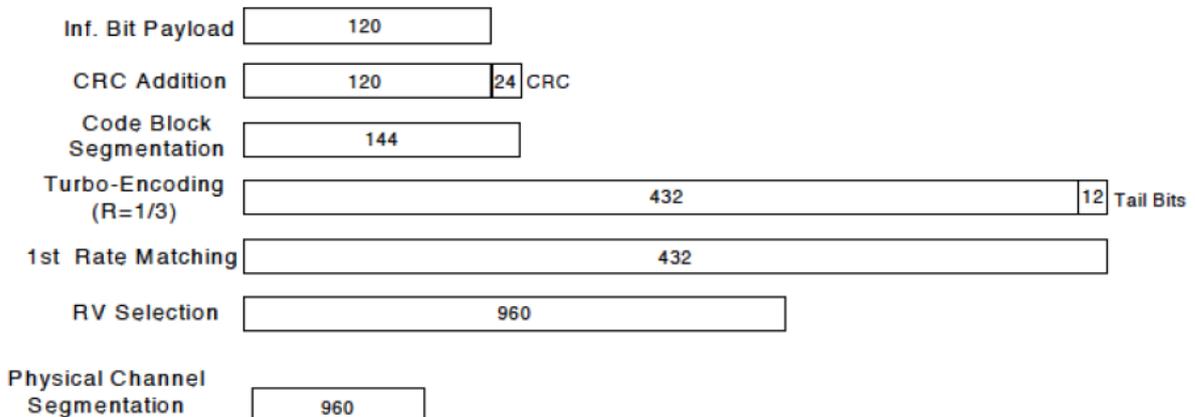


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c/β_d ^o	$\beta_{hs}(1)$ ^o	CM(dB)(2) ^o	MPR(dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note1: Δ ACK, Δ NACK and Δ CQI=8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ ^o

Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.^o

Note3: For subtest2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$ ^o

Up commands are set continuously to set the UE to Max power.

Note:

- 1.The Dual Carriers transmission only applies to HSDPA physical channels
- 2.The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4.The Dual Carriers operate in the same frequency band .
- 5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
- 6.The device doesn't support carrier aggregation for it just can operate in Release 8.

6.4 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02r03. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames(Maximum TTI)

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

3) A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS_01" on the base station simulator.

4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

5) TDD LTE test configuration

According to KDB 941225 D05 SAR for LTE Devices v02r03, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

TDD LTE Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Figure 4.2-1: Frame structure type 2

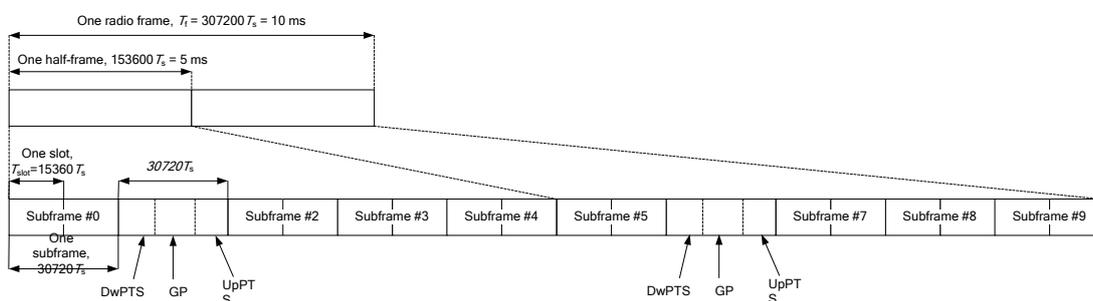


Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special configuration	Normal cyclic prefix in downlink				Extended cyclic prefix in downlink			
	DwPTS	UpPTS		DwPTS	UpPTS			
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$		
1	$19760 \cdot T_s$			$20480 \cdot T_s$				
2	$21952 \cdot T_s$			$23040 \cdot T_s$				
3	$24144 \cdot T_s$			$25600 \cdot T_s$				
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$		
5	$6592 \cdot T_s$			$20480 \cdot T_s$				
6	$19760 \cdot T_s$			$23040 \cdot T_s$				
7	$21952 \cdot T_s$			$12800 \cdot T_s$				
8	$24144 \cdot T_s$			-			-	-
9	$13168 \cdot T_s$	-	-	-				

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number										
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	
1	5 ms	D	S	U	U	D	D	S	U	U	D	
2	5 ms	D	S	U	D	D	D	S	U	D	D	
3	10 ms	D	S	U	U	U	D	D	D	D	D	
4	10 ms	D	S	U	U	D	D	D	D	D	D	
5	10 ms	D	S	U	D	D	D	D	D	D	D	
6	5 ms	D	S	U	U	U	D	S	U	U	D	

According to Figure 4.2-1, one radio frame is configured by 10 subframes, which consist of Uplink-subframe, Downlink-subframe and Special subframe. For TDD-LTE, the Duty Cycle should be calculated on Uplink-subframes and Special subframes, due to Special subframe containing both Uplink transmissions. So for one radio frame, Duty Cycle can be calculated with formula as below. The count of Uplink subframes are according to Table 4.2-2:

$$\text{Duty cycle} = (30720T_s \cdot \text{Ups} + \text{Uplink Component} \cdot \text{Specials}) / (307200T_s)$$

About the uplink component of Special subframes, we can figure out by Table 4.2-1:

$$\text{Uplink Component} = \text{UpPTS}$$

In conclusion, for the TDD LTE Band, Duty Cycle can be calculated with formula as below .all these sets are ok when we test, or we can set as below.

$$\text{Duty cycle} = [(30720T_s \cdot \text{Ups}) + \text{UpPTS} \cdot \text{Specials}] / (307200T_s)$$

And we can get different Duty cycles under different configurations:

Uplink-downlink configuration	Subframe number			Configuration of special subframe							
				Normal cyclic prefix in downlink				Extended cyclic prefix in downlink			
	Normal cyclic prefix in uplink		Extended cyclic prefix in uplink		Normal cyclic prefix in uplink		Extended cyclic prefix in uplink				
	D	S	U	configuration 0~4	configuration 5~9	configuration 0~4	configuration 5~9	configuration 0~3	configuration 4~7	configuration 0~3	configuration 4~7
0	2	2	6	61.43%	62.85%	61.67%	63.33%	61.43%	62.85%	61.67%	63.33%
1	4	2	4	41.43%	42.85%	41.67%	43.33%	41.43%	42.85%	41.67%	43.33%
2	6	2	2	21.43%	22.85%	21.67%	23.33%	21.43%	22.85%	21.67%	23.33%
3	6	1	3	30.71%	31.43%	30.83%	31.67%	30.71%	31.43%	30.83%	31.67%
4	7	1	2	20.71%	21.43%	20.83%	21.67%	20.71%	21.43%	20.83%	21.67%
5	8	1	1	10.71%	11.43%	10.83%	11.67%	10.71%	11.43%	10.83%	11.67%
6	3	2	5	51.43%	52.85%	51.67%	53.33%	51.43%	52.85%	51.67%	53.33%

For TDD LTE, SAR should be tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7 for Frame structure type 2.

6.5 WiFi Test Configuration

For WiFi SAR testing, a communication link is set up with the testing software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The RF signal utilized in SAR measurement has 100% duty cycle and its crest factor is 1. The test procedures in KDB 248227D01v02r01 are applied. (Refer to KDB 248227D01 for more details)

6.5.1 Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is $\leq 0.4\text{W/kg}$, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is $\leq 0.8\text{W/kg}$ or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is $> 0.8\text{W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is $\leq 1.2\text{W/kg}$ or all required channels are tested.

6.5.2 Initial Test Configuration Procedure

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2 of KDB 248227D01v02r01). SAR test reduction of subsequent highest output test channels is based on the *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is $> 0.8\text{W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the *reported* SAR is $\leq 1.2\text{W/kg}$ or all required channels are tested.

6.5.3 Sub Test Configuration Procedure

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

When the highest reported SAR for the initial test configuration, according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$, SAR is not required for that subsequent test configuration.

6.5.4 WiFi 2.4G SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the *reported* SAR of the highest measured maximum output power channel (section 3.1 of of KDB 248227D01v02r01) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the *reported* SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any *reported* SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of of KDB 248227D01v02r01). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

7 SAR Measurement Results

7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200&CMW500 was used. SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

Note: CMU200 measures GSM peak and average output power for active timeslots. For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
timebased avg. power compared to slotted avg. power	-9.19dB	-6.13dB	-4.42dB	-3.18dB

The signalling modes differ as follows:

mode	coding scheme	modulation
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

7.1.1 Conducted power measurements of GSM850(Second Antenna)

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	128CH	190CH	251CH		Tune-up	128CH	190CH	251CH
GSM (CS)		30.50	29.57	29.90	30.03	-9.19	21.31	20.38	20.71	20.84
GPRS/ EDGE (GMSK)	1 Tx Slot	30.50	29.58	29.89	30.04	-9.19	21.31	20.39	20.70	20.85
	2 Tx Slots	27.50	26.32	26.70	26.91	-6.13	21.37	20.19	20.57	20.78
	3 Tx Slots	25.50	24.19	24.50	24.50	-4.42	21.08	19.77	20.08	20.08
	4 Tx Slots	24.50	22.94	23.15	23.26	-3.18	21.32	19.76	19.97	20.08
EDGE (8PSK)	1 Tx Slot	27.50	26.66	26.79	26.91	-9.19	18.31	17.47	17.60	17.72
	2 Tx Slots	27.50	25.85	26.12	26.22	-6.13	21.37	19.72	19.99	20.09
	3 Tx Slots	25.50	23.76	23.91	23.95	-4.42	21.08	19.34	19.49	19.53
	4 Tx Slots	24.50	22.53	22.71	22.81	-3.18	21.32	19.35	19.53	19.63

Table 13:Conducted power measurement results of GSM850

Note:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

7.1.2 Conducted power measurements of GSM1900(Second Antenna)

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
GSM (CS)		27.00	25.60	25.36	25.83	-9.19	17.81	16.41	16.17	16.64
GPRS/ EDGE (GMSK)	1 Tx Slot	27.00	25.58	25.36	25.84	-9.19	17.81	16.39	16.17	16.65
	2 Tx Slots	24.00	22.38	22.29	22.58	-6.13	17.87	16.25	16.16	16.45
	3 Tx Slots	21.50	20.01	19.90	20.22	-4.42	17.08	15.59	15.48	15.80
	4 Tx Slots	20.50	18.83	18.71	18.95	-3.18	17.32	15.65	15.53	15.77
EDGE (8PSK)	1 Tx Slot	26.50	25.24	25.20	25.19	-9.19	17.31	16.05	16.01	16.00
	2 Tx Slots	24.00	22.54	22.46	22.48	-6.13	17.87	16.41	16.33	16.35
	3 Tx Slots	21.50	20.07	20.07	20.06	-4.42	17.08	15.65	15.65	15.64
	4 Tx Slots	20.50	18.84	18.77	18.78	-3.18	17.32	15.66	15.59	15.60

Table 14: Conducted power measurement results of GSM1900

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

7.1.3 Conducted power measurements of UMTS Band V(Second Antenna)

UMTS Band V		Tune-up	Conducted Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	22.30	21.77	21.86	21.86
	64kbps RMC	22.30	21.79	21.88	21.91
	144kbps RMC	22.30	21.85	21.86	21.89
	384kbps RMC	22.30	21.85	21.84	21.87
HSDPA	Subtest 1	22.30	20.79	20.82	20.84
	Subtest 2	21.80	20.78	20.81	20.84
	Subtest 3	21.30	19.99	20.33	20.34
	Subtest 4	21.30	20.25	20.31	20.34
HSUPA	Subtest 1	21.30	20.75	20.72	20.82
	Subtest 2	20.80	19.69	19.65	19.78
	Subtest 3	20.80	19.05	18.96	18.97
	Subtest 4	20.80	20.02	19.96	20.08
	Subtest 5	21.30	20.24	20.20	20.18
DC-HSDPA	Subtest 1	22.30	20.70	20.75	20.76
	Subtest 2	21.80	20.69	20.72	20.77
	Subtest 3	21.30	19.90	20.25	20.23
	Subtest 4	21.30	20.12	20.18	20.16

Table 15: Conducted power measurement results of UMTS Band V

Note: 1) The conducted power of UMTS Band V is measured with RMS detector.

2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).

3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

7.1.4 Conducted power measurements of LTE Band V(Second Antenna)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	20.50	19.99	20.12	20.10
		1	3	20.50	19.98	19.85	20.09
		1	5	20.50	19.94	19.86	20.03
		3	0	20.50	19.85	19.98	20.06
		3	2	20.50	19.89	19.98	20.13
		3	3	20.50	19.87	19.95	20.12
		6	0	19.50	18.90	18.94	19.06
	16QAM	1	0	19.50	19.37	19.30	19.47
		1	3	19.50	19.40	19.45	19.48
		1	5	19.50	19.38	19.40	19.46
		3	0	19.50	18.93	19.25	19.36
		3	2	19.50	18.76	19.24	19.33
		3	3	19.50	18.96	19.21	19.29
		6	0	18.50	18.17	18.39	18.46
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20415CH	20525CH	20635CH
3MHz	QPSK	1	0	20.50	20.10	20.12	20.14
		1	7	20.50	20.04	20.08	20.29
		1	14	20.50	20.12	20.14	20.27
		8	0	19.50	19.06	18.99	19.07
		8	4	19.50	19.01	18.90	18.98
		8	7	19.50	19.05	18.93	18.98
		15	0	19.50	19.02	19.03	19.10
	16QAM	1	0	19.50	19.29	19.30	19.36
		1	7	19.50	19.04	19.19	19.23
		1	14	19.50	19.20	19.19	19.22
		8	0	18.50	18.04	17.92	18.06
		8	4	18.50	18.08	17.61	18.16
		8	7	18.50	18.02	17.56	18.17
		15	0	18.50	17.87	17.62	18.05

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20425CH	20525CH	20625CH
5MHz	QPSK	1	0	20.50	20.17	20.11	20.21
		1	13	20.50	20.15	19.92	19.79
		1	24	20.50	20.11	20.00	19.77
		12	0	19.50	18.97	19.00	19.10
		12	6	19.50	18.98	18.92	18.98
		12	13	19.50	18.97	18.93	19.00
		25	0	19.50	19.03	19.00	19.01
	16QAM	1	0	19.50	18.93	19.04	19.02
		1	13	19.50	18.99	18.74	18.67
		1	24	19.50	18.79	18.88	18.75
		12	0	18.50	17.95	17.82	17.97
		12	6	18.50	17.95	17.84	17.96
		12	13	18.50	17.93	17.95	18.06
		25	0	18.50	17.98	17.94	18.12
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20450CH	20525CH	20600CH
10MHz	QPSK	1	0	20.50	20.28	20.44	20.25
		1	25	20.50	20.20	20.15	20.17
		1	49	20.50	20.06	20.16	20.20
		25	0	19.50	19.11	19.03	19.09
		25	13	19.50	19.04	19.00	18.95
		25	25	19.50	18.99	18.98	18.99
		50	0	19.50	19.06	19.02	18.99
	16QAM	1	0	19.50	19.20	19.26	19.15
		1	25	19.50	19.08	19.47	19.09
		1	49	19.50	19.04	19.39	19.19
		25	0	18.50	18.00	18.07	17.86
		25	13	18.50	18.03	17.92	17.84
		25	25	18.50	17.97	17.92	17.89
		50	0	18.50	17.83	17.93	17.96

Table 16: Conducted power measurement results of LTE Band V

7.1.5 Conducted power measurements of LTE Band VII(Second Antenna)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	15.50	14.60	14.72	14.57
		1	13	15.50	14.43	14.47	14.55
		1	24	15.50	14.27	14.56	14.66
		12	0	14.50	13.46	13.58	13.53
		12	6	14.50	13.34	13.50	13.48
		12	13	14.50	13.33	13.54	13.54
		25	0	14.50	13.38	13.52	13.53
	16QAM	1	0	14.50	13.39	13.55	13.53
		1	13	14.50	13.02	13.17	13.15
		1	24	14.50	13.17	13.38	13.30
		12	0	13.50	12.52	12.63	12.58
		12	6	13.50	12.24	12.34	12.45
		12	13	13.50	12.32	12.52	12.63
		25	0	13.50	12.52	12.52	12.55
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	15.50	14.80	14.96	14.86
		1	25	15.50	14.51	14.64	14.94
		1	49	15.50	14.72	14.72	14.73
		25	0	14.50	13.51	13.73	13.53
		25	13	14.50	13.36	13.59	13.60
		25	25	14.50	13.44	13.56	13.58
		50	0	14.50	13.43	13.60	13.65
	16QAM	1	0	14.50	14.22	14.25	14.15
		1	25	14.50	14.00	14.17	14.28
		1	49	14.50	14.01	14.16	14.13
		25	0	13.50	12.41	12.68	12.49
		25	13	13.50	12.34	12.55	12.48
		25	25	13.50	12.31	12.53	12.46
		50	0	13.50	12.49	12.54	12.53

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	15.50	14.88	14.87	14.97
		1	38	15.50	14.52	14.64	14.62
		1	74	15.50	14.65	14.65	14.89
		36	0	14.50	13.53	13.74	13.62
		36	18	14.50	13.42	13.54	13.52
		36	39	14.50	13.52	13.51	13.59
		75	0	14.50	13.45	13.57	13.54
	16QAM	1	0	14.50	14.11	14.28	14.03
		1	38	14.50	13.45	13.29	13.20
		1	74	14.50	13.90	13.82	13.97
		36	0	13.50	12.53	12.54	12.57
		36	18	13.50	12.42	12.39	12.44
		36	39	13.50	12.61	12.43	12.58
		75	0	13.50	12.57	12.60	12.51
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	15.50	14.78	14.93	14.72
		1	50	15.50	14.37	14.49	14.49
		1	99	15.50	14.53	14.43	14.58
		50	0	14.50	13.50	13.74	13.62
		50	25	14.50	13.49	13.55	13.50
		50	50	14.50	13.44	13.54	13.50
		100	0	14.50	13.50	13.65	13.49
	16QAM	1	0	14.50	14.37	14.46	14.36
		1	50	14.50	13.40	13.51	13.45
		1	99	14.50	14.26	13.71	13.56
		50	0	13.50	12.52	12.71	12.49
		50	25	13.50	12.44	12.61	12.39
		50	50	13.50	12.57	12.59	12.48
		100	0	13.50	12.54	12.60	12.47

Table 17: Conducted power measurement results of LTE Band VII

7.1.6 Conducted power measurements of LTE Band XXXVIII(Second Antenna)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37775CH	38000CH	38225CH
5MHz	QPSK	1	0	17.50	16.72	16.45	16.54
		1	13	17.50	16.38	16.47	16.36
		1	24	17.50	16.47	16.50	16.25
		12	0	16.50	15.74	15.57	15.43
		12	6	16.50	15.61	15.51	15.52
		12	13	16.50	15.50	15.60	15.37
		25	0	16.50	15.51	15.50	15.50
	16QAM	1	0	16.50	15.39	15.10	15.13
		1	13	16.50	15.16	15.03	14.92
		1	24	16.50	14.99	15.07	14.92
		12	0	15.50	14.67	14.45	14.33
		12	6	15.50	14.56	14.49	14.23
		12	13	15.50	14.46	14.57	14.32
		25	0	15.50	14.41	14.41	14.54
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37800CH	38000CH	38200CH
10MHz	QPSK	1	0	17.50	16.86	16.64	16.62
		1	25	17.50	16.78	16.55	16.48
		1	49	17.50	16.83	16.62	16.49
		25	0	16.50	15.66	15.60	15.64
		25	13	16.50	15.36	15.59	15.60
		25	25	16.50	15.57	15.64	15.54
		50	0	16.50	15.52	15.51	15.63
	16QAM	1	0	16.50	16.72	16.53	16.60
		1	25	16.50	16.48	16.55	16.66
		1	49	16.50	16.61	16.70	16.47
		25	0	15.50	14.71	14.78	14.94
		25	13	15.50	14.73	14.76	14.81
		25	25	15.50	14.57	14.73	14.72
		50	0	15.50	14.48	14.48	14.60

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37825CH	38000CH	38175CH
15MHz	QPSK	1	0	17.50	16.78	16.74	16.67
		1	38	17.50	16.40	16.61	16.54
		1	74	17.50	16.57	16.63	16.50
		36	0	16.50	15.63	15.61	15.63
		36	18	16.50	15.52	15.54	15.64
		36	39	16.50	15.62	15.64	15.65
		75	0	16.50	15.70	15.60	15.62
	16QAM	1	0	16.50	16.35	16.46	16.41
		1	38	16.50	16.08	16.31	16.27
		1	74	16.50	16.24	16.31	16.21
		36	0	15.50	14.38	14.59	14.62
		36	18	15.50	14.36	14.52	14.64
		36	39	15.50	14.45	14.50	14.64
		75	0	15.50	14.79	14.49	14.65
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37850CH	38000CH	38150CH
20MHz	QPSK	1	0	17.50	16.88	16.80	17.08
		1	50	17.50	17.15	17.27	17.25
		1	99	17.50	16.87	16.91	16.80
		50	0	16.50	15.70	15.75	15.72
		50	25	16.50	15.73	15.67	15.65
		50	50	16.50	15.67	15.57	15.66
		100	0	16.50	15.63	15.55	15.64
	16QAM	1	0	16.50	15.85	15.96	16.06
		1	50	16.50	15.73	15.73	16.06
		1	99	16.50	15.55	15.69	15.81
		50	0	15.50	14.57	14.73	14.69
		50	25	15.50	14.56	14.55	14.64
		50	50	15.50	14.56	14.54	14.54
		100	0	15.50	14.69	14.53	14.64

Table 18: Conducted power measurement results of LTE Band XXXVIII

7.1.7 Conducted power measurements of GSM850(Main Antenna)

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	128CH	190CH	251CH		Tune-up	128CH	190CH	251CH
GSM (CS)		33.50	31.57	32.24	32.46	-9.19	24.31	22.38	23.05	23.27
GPRS/ EDGE (GMSK)	1 Tx Slot	33.50	31.58	32.25	32.44	-9.19	24.31	22.39	23.06	23.25
	2 Tx Slots	30.50	28.85	28.91	29.11	-6.13	24.37	22.72	22.78	22.98
	3 Tx Slots	28.00	26.55	26.56	26.74	-4.42	23.58	22.13	22.14	22.32
	4 Tx Slots	27.00	25.32	25.29	25.46	-3.18	23.82	22.14	22.11	22.28
EDGE (8PSK)	1 Tx Slot	28.00	26.30	26.34	26.40	-9.19	18.81	17.11	17.15	17.21
	2 Tx Slots	27.50	25.92	25.88	25.93	-6.13	21.37	19.79	19.75	19.80
	3 Tx Slots	26.50	24.56	24.52	24.52	-4.42	22.08	20.14	20.10	20.10
	4 Tx Slots	25.00	23.23	23.26	23.27	-3.18	21.82	20.05	20.08	20.09

Table 19:Conducted power measurement results of GSM850(Hotspot disabled)

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	128CH	190CH	251CH		Tune-up	128CH	190CH	251CH
GSM (CS)		33.50	31.55	32.17	32.34	-9.19	24.31	22.36	22.98	23.15
GPRS/ EDGE (GMSK)	1 Tx Slot	33.50	31.51	32.13	32.31	-9.19	24.31	22.32	22.94	23.12
	2 Tx Slots	30.50	28.77	28.55	28.97	-6.13	24.37	22.64	22.42	22.84
	3 Tx Slots	27.50	26.11	26.38	26.55	-4.42	23.08	21.69	21.96	22.13
	4 Tx Slots	26.50	24.83	25.08	25.27	-3.18	23.32	21.65	21.90	22.09
EDGE (8PSK)	1 Tx Slot	27.50	26.33	26.30	26.29	-9.19	18.31	17.14	17.11	17.10
	2 Tx Slots	27.50	25.83	25.79	25.89	-6.13	21.37	19.70	19.66	19.76
	3 Tx Slots	25.50	24.47	24.49	24.45	-4.42	21.08	20.05	20.07	20.03
	4 Tx Slots	24.50	23.20	23.20	23.29	-3.18	21.32	20.02	20.02	20.11

Table 20:Conducted power measurement results of GSM850(Hotspot activated)

Note:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

7.1.8 Conducted power measurements of GSM1900(Main Antenna)

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
GSM (CS)		30.50	28.88	29.05	29.33	-9.19	21.31	19.69	19.86	20.14
GPRS/ EDGE (GMSK)	1 Tx Slot	30.50	28.86	29.02	29.31	-9.19	21.31	19.67	19.83	20.12
	2 Tx Slots	27.50	25.92	25.74	26.22	-6.13	21.37	19.79	19.61	20.09
	3 Tx Slots	25.50	24.44	24.35	24.79	-4.42	21.08	20.02	19.93	20.37
	4 Tx Slots	24.50	23.17	23.07	23.42	-3.18	21.32	19.99	19.89	20.24
EDGE (8PSK)	1 Tx Slot	26.50	25.61	25.62	25.56	-9.19	17.31	16.42	16.43	16.37
	2 Tx Slots	26.50	25.15	25.07	25.03	-6.13	20.37	19.02	18.94	18.90
	3 Tx Slots	24.50	23.53	23.48	23.52	-4.42	20.08	19.11	19.06	19.10
	4 Tx Slots	23.50	22.24	22.24	22.26	-3.18	20.32	19.06	19.06	19.08

Table 21: Conducted power measurement results of GSM1900(Hotspot disable)

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
GSM (CS)		27.00	25.56	25.43	25.86	-9.19	17.81	16.37	16.24	16.67
GPRS/ EDGE (GMSK)	1 Tx Slot	27.00	25.54	25.48	25.74	-9.19	17.81	16.35	16.29	16.55
	2 Tx Slots	25.50	24.46	24.39	24.75	-6.13	19.37	18.33	18.26	18.62
	3 Tx Slots	21.50	19.93	19.88	20.27	-4.42	17.08	15.51	15.46	15.85
	4 Tx Slots	20.50	18.77	18.72	19.00	-3.18	17.32	15.59	15.54	15.82
EDGE (8PSK)	1 Tx Slot	26.50	25.36	25.28	25.25	-9.19	17.81	16.17	16.09	16.06
	2 Tx Slots	25.00	24.79	24.71	24.72	-6.13	18.87	18.66	18.58	18.59
	3 Tx Slots	21.50	20.09	20.09	20.05	-4.42	17.08	15.67	15.67	15.63
	4 Tx Slots	20.00	18.85	18.83	18.82	-3.18	16.82	15.67	15.65	15.64

Table 22: Conducted power measurement results of GSM1900(Hotspot activated)

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

7.1.9 Conducted power measurements of UMTS Band V(Main Antenna)

UMTS Band V		Tune-up	Conducted Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	24.80	24.44	24.52	24.55
	64kbps RMC	24.80	24.50	24.60	24.60
	144kbps RMC	24.80	24.51	24.56	24.57
	384kbps RMC	24.80	24.54	24.61	24.64
HSDPA	Subtest 1	23.80	23.48	23.43	23.45
	Subtest 2	23.80	23.43	23.42	23.39
	Subtest 3	23.80	22.88	22.91	22.58
	Subtest 4	23.80	22.62	22.55	22.89
HSUPA	Subtest 1	23.80	23.17	23.22	23.38
	Subtest 2	22.30	22.23	22.25	22.24
	Subtest 3	22.30	22.15	21.93	22.29
	Subtest 4	22.30	22.25	22.20	22.14
	Subtest 5	23.80	22.82	22.71	22.98
DC-HSDPA	Subtest 1	23.80	23.41	23.33	23.38
	Subtest 2	23.80	23.39	23.31	23.30
	Subtest 3	23.80	22.80	22.81	22.49
	Subtest 4	23.80	22.55	22.43	22.79

Table 23: Conducted power measurement results of UMTS Band V

Note: 1) The conducted power of UMTS Band V is measured with RMS detector.

2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).

3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

7.1.10 Conducted power measurements of LTE Band V(Main Antenna)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	24.00	23.08	23.35	23.19
		1	3	24.00	23.06	23.18	23.40
		1	5	24.00	23.04	23.11	23.35
		3	0	24.00	23.05	23.09	23.22
		3	2	24.00	23.14	23.11	23.23
		3	3	24.00	23.12	23.08	23.16
		6	0	23.00	22.14	22.13	22.15
	16QAM	1	0	23.00	22.88	22.67	22.87
		1	3	23.00	22.91	22.74	22.90
		1	5	23.00	22.90	22.76	22.90
		3	0	23.00	22.11	22.37	22.27
		3	2	23.00	22.17	22.38	22.29
		3	3	23.00	22.33	22.44	21.92
		6	0	22.00	21.15	21.44	20.97
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20415CH	20525CH	20635CH
3MHz	QPSK	1	0	24.00	23.29	23.26	23.31
		1	7	24.00	23.29	23.23	23.39
		1	14	24.00	23.35	23.37	23.35
		8	0	23.00	22.17	22.17	22.20
		8	4	23.00	22.21	22.08	22.18
		8	7	23.00	22.23	22.22	22.24
		15	0	23.00	22.24	22.21	22.20
	16QAM	1	0	23.00	22.40	22.19	22.39
		1	7	23.00	22.21	22.16	22.34
		1	14	23.00	22.35	22.05	22.22
		8	0	22.00	21.28	20.77	21.18
		8	4	22.00	21.32	20.67	21.15
		8	7	22.00	21.36	20.72	21.14
		15	0	22.00	21.18	20.81	21.28

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20425CH	20525CH	20625CH
5MHz	QPSK	1	0	24.00	23.19	23.33	23.36
		1	13	24.00	23.29	23.03	23.05
		1	24	24.00	23.32	23.08	23.16
		12	0	23.00	22.19	22.21	22.22
		12	6	23.00	22.20	22.20	22.12
		12	13	23.00	22.29	22.09	22.19
		25	0	23.00	22.19	22.18	22.09
	16QAM	1	0	23.00	21.97	22.10	21.94
		1	13	23.00	21.94	22.01	21.87
		1	24	23.00	21.96	22.06	21.87
		12	0	22.00	21.01	21.13	21.20
		12	6	22.00	21.22	21.13	21.10
		12	13	22.00	21.21	21.13	21.18
		25	0	22.00	21.35	21.23	21.14
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20450CH	20525CH	20600CH
10MHz	QPSK	1	0	24.00	23.41	23.47	23.35
		1	25	24.00	23.39	23.28	23.29
		1	49	24.00	23.28	23.26	23.32
		25	0	23.00	22.29	22.24	22.19
		25	13	23.00	22.27	22.15	22.05
		25	25	23.00	22.08	22.25	22.19
		50	0	23.00	22.24	22.29	22.14
	16QAM	1	0	23.00	22.42	22.46	22.22
		1	25	23.00	22.18	22.83	22.81
		1	49	23.00	21.93	22.75	22.83
		25	0	22.00	21.29	21.07	21.16
		25	13	22.00	21.12	21.03	21.10
		25	25	22.00	21.06	21.11	21.06
		50	0	22.00	21.27	21.20	21.05

Table 24: Conducted power measurement results of LTE Band V

7.1.11 Conducted power measurements of LTE Band VII(Main Antenna)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	23.70	23.05	22.95	23.16
		1	13	23.70	22.88	22.85	23.18
		1	24	23.70	22.78	23.16	23.30
		12	0	23.00	22.07	22.21	22.13
		12	6	23.00	21.91	22.06	22.18
		12	13	23.00	21.93	22.17	22.21
		25	0	23.00	22.01	22.15	22.15
	16QAM	1	0	23.00	21.97	21.96	21.96
		1	13	23.00	21.56	21.51	21.67
		1	24	23.00	21.67	21.69	22.03
		12	0	22.00	20.92	20.95	20.90
		12	6	22.00	20.81	20.88	21.10
		12	13	22.00	20.88	21.02	21.24
		25	0	22.00	21.14	21.19	21.28
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	23.70	23.22	23.29	23.66
		1	25	23.70	23.28	23.15	23.34
		1	49	23.70	23.16	23.27	23.36
		25	0	23.00	22.08	22.29	22.09
		25	13	23.00	22.00	22.20	22.17
		25	25	23.00	22.08	22.26	22.21
		50	0	23.00	22.08	22.28	22.16
	16QAM	1	0	23.00	22.28	22.82	22.42
		1	25	23.00	22.69	22.58	22.86
		1	49	23.00	22.64	22.73	22.77
		25	0	22.00	20.91	21.36	21.01
		25	13	22.00	20.88	21.15	21.02
		25	25	22.00	20.89	20.96	21.08
		50	0	22.00	20.95	20.99	21.06

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	23.70	23.25	23.26	23.65
		1	38	23.70	23.04	23.17	23.24
		1	74	23.70	23.32	23.37	23.46
		36	0	23.00	22.12	22.25	22.15
		36	18	23.00	21.93	22.13	22.08
		36	39	23.00	22.02	22.12	22.22
		75	0	23.00	22.03	22.22	22.09
	16QAM	1	0	23.00	22.54	22.62	22.11
		1	38	23.00	21.91	21.99	21.88
		1	74	23.00	22.34	22.51	22.60
		36	0	22.00	20.95	21.12	21.11
		36	18	22.00	20.82	20.95	21.00
		36	39	22.00	20.84	21.09	21.17
		75	0	22.00	20.94	21.04	21.02
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	23.70	23.38	23.29	23.45
		1	50	23.70	22.86	23.03	23.10
		1	99	23.70	22.97	23.02	23.12
		50	0	23.00	22.07	22.30	22.18
		50	25	23.00	21.95	22.11	22.05
		50	50	23.00	21.96	22.16	22.26
		100	0	23.00	22.08	22.17	22.15
	16QAM	1	0	23.00	22.75	22.15	22.06
		1	50	23.00	22.03	22.06	21.97
		1	99	23.00	22.03	21.96	22.09
		50	0	22.00	20.99	21.39	21.07
		50	25	22.00	20.96	21.19	21.09
		50	50	22.00	20.90	21.24	21.27
		100	0	22.00	21.13	21.15	21.04

Table 25: Conducted power measurement results of LTE Band VII(Hotspot disabled)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	20.50	20.06	20.25	20.30
		1	13	20.50	19.89	20.08	20.23
		1	24	20.50	19.95	19.74	20.28
		12	0	20.50	19.94	20.10	20.06
		12	6	20.50	19.77	20.04	20.17
		12	13	20.50	19.83	20.12	20.16
		25	0	20.50	19.84	20.08	20.08
	16QAM	1	0	20.50	19.91	19.68	19.90
		1	13	20.50	19.39	19.66	19.58
		1	24	20.50	19.79	19.68	20.06
		12	0	20.50	19.85	20.13	20.04
		12	6	20.50	19.79	19.89	20.22
		12	13	20.50	19.82	19.94	20.11
		25	0	20.50	19.86	20.02	20.16
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	20.50	20.33	20.37	20.27
		1	25	20.50	19.98	20.33	20.35
		1	49	20.50	20.19	20.25	20.34
		25	0	20.50	20.09	20.15	20.01
		25	13	20.50	19.76	20.08	20.13
		25	25	20.50	19.89	20.13	20.13
		50	0	20.50	19.97	20.16	20.18
	16QAM	1	0	20.50	20.50	20.27	20.49
		1	25	20.50	20.33	20.45	20.48
		1	49	20.50	20.47	20.47	20.48
		25	0	20.50	19.94	20.06	20.03
		25	13	20.50	19.80	20.04	20.13
		25	25	20.50	19.76	19.97	20.12
		50	0	20.50	19.82	20.00	20.13

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	20.50	20.37	20.34	20.45
		1	38	20.50	20.11	20.21	20.30
		1	74	20.50	20.28	20.38	20.44
		36	0	20.50	19.99	20.24	20.10
		36	18	20.50	19.82	20.10	20.04
		36	39	20.50	19.96	20.10	20.17
		75	0	20.50	19.94	20.12	20.05
	16QAM	1	0	20.50	20.46	20.47	20.46
		1	38	20.50	19.73	20.26	19.85
		1	74	20.50	20.32	20.49	20.47
		36	0	20.50	20.05	20.15	19.92
		36	18	20.50	19.81	19.98	20.03
		36	39	20.50	20.03	20.11	20.25
		75	0	20.50	19.90	20.13	20.04
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	20.50	20.22	20.25	20.23
		1	50	20.50	19.88	20.11	20.13
		1	99	20.50	19.94	20.13	20.27
		50	0	20.50	20.06	20.21	20.13
		50	25	20.50	19.88	20.06	20.09
		50	50	20.50	19.92	20.07	20.19
		100	0	20.50	20.04	20.16	20.15
	16QAM	1	0	20.50	20.44	20.03	20.48
		1	50	20.50	19.95	20.01	20.05
		1	99	20.50	19.99	19.84	20.11
		50	0	20.50	20.00	20.19	20.06
		50	25	20.50	20.05	20.14	19.94
		50	50	20.50	20.01	20.11	20.15
		100	0	20.50	19.97	20.22	20.10

Table 26: Conducted power measurement results of LTE Band VII(Hotspot activated)

7.1.12 Conducted power measurements of LTE Band XXXVIII(Main Antenna)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37775CH	38000CH	38225CH
5MHz	QPSK	1	0	22.50	21.64	21.75	21.78
		1	13	22.50	21.43	21.72	21.53
		1	24	22.50	21.53	21.69	21.50
		12	0	21.50	20.77	20.74	20.74
		12	6	21.50	20.67	20.74	20.83
		12	13	21.50	20.67	20.84	20.78
		25	0	21.50	20.68	20.74	20.82
	16QAM	1	0	22.50	20.40	20.44	20.41
		1	13	22.50	20.27	20.46	20.33
		1	24	22.50	20.19	20.29	20.32
		12	0	20.50	19.52	19.49	19.70
		12	6	20.50	19.42	19.41	19.68
		12	13	20.50	19.41	19.56	19.73
		25	0	20.50	19.75	19.61	19.72
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37800CH	38000CH	38200CH
10MHz	QPSK	1	0	22.50	21.86	21.80	21.90
		1	25	22.50	21.62	21.69	21.70
		1	49	22.50	21.69	21.66	21.68
		25	0	21.50	20.82	20.85	20.95
		25	13	21.50	20.81	20.78	20.95
		25	25	21.50	20.77	20.92	20.86
		50	0	21.50	20.75	20.82	20.96
	16QAM	1	0	22.50	21.86	21.76	21.80
		1	25	22.50	21.80	21.86	21.82
		1	49	22.50	21.78	21.78	21.74
		25	0	20.50	19.87	19.73	20.14
		25	13	20.50	19.77	19.68	20.04
		25	25	20.50	19.74	19.74	19.96
		50	0	20.50	19.60	19.61	19.81

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37825CH	38000CH	38175CH
15MHz	QPSK	1	0	22.50	21.86	21.88	21.93
		1	38	22.50	21.57	21.74	21.88
		1	74	22.50	21.64	21.85	21.70
		36	0	21.50	20.87	20.94	20.92
		36	18	21.50	20.72	20.77	20.96
		36	39	21.50	20.85	20.84	20.89
		75	0	21.50	20.85	20.75	20.84
	16QAM	1	0	22.50	21.65	21.66	21.69
		1	38	22.50	21.36	21.52	21.55
		1	74	22.50	21.52	21.48	21.52
		36	0	20.50	19.70	19.71	19.89
		36	18	20.50	19.61	19.58	19.86
		36	39	20.50	19.66	19.63	19.80
		75	0	20.50	19.97	19.78	19.76
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37850CH	38000CH	38150CH
20MHz	QPSK	1	0	22.50	21.80	21.81	21.82
		1	50	22.50	21.87	21.89	21.86
		1	99	22.50	21.62	21.70	21.55
		50	0	21.50	20.82	20.87	20.83
		50	25	21.50	20.81	20.77	20.84
		50	50	21.50	20.77	20.62	20.70
		100	0	21.50	20.79	20.70	20.74
	16QAM	1	0	22.50	20.62	20.48	20.62
		1	50	22.50	20.74	20.76	20.79
		1	99	22.50	20.35	20.47	20.42
		50	0	20.50	19.67	19.48	19.67
		50	25	20.50	19.60	19.39	19.57
		50	50	20.50	19.62	19.37	19.54
		100	0	20.50	19.68	19.46	19.61

Table 27: Conducted power measurement results of LTE Band XXXVIII

7.1.13 Conducted power measurements of WiFi 2.4G

Wi-Fi 2450MHz	Channel	Tune-up	Average Power (dBm) for Data Rates (Mbps)							
			1	2	5.5	11	/	/	/	/
802.11b	1	18.00	17.44	17.41	17.33	16.93	/	/	/	/
	6	18.00	17.96	17.82	17.75	17.67	/	/	/	/
	11	18.00	17.02	17.03	16.95	16.66	/	/	/	/
802.11g	Channel	Tune-up	6	9	12	18	24	36	48	54
	1	15.00	13.64	13.55	13.48	13.20	12.87	12.17	11.36	11.20
	6	15.00	13.92	13.83	13.70	13.16	12.85	12.20	11.40	11.17
	11	15.00	13.58	13.39	13.00	12.81	12.64	12.03	11.24	11.08
802.11n (HT20)	Channel	Tune-up	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
	1	13.00	10.51	10.22	9.76	9.27	8.72	8.66	8.43	8.11
	6	13.00	10.65	10.41	9.90	9.46	8.97	8.71	8.39	8.05
	11	13.00	10.62	10.42	9.94	9.55	8.99	8.60	8.45	8.08

Table 28: Conducted power measurement results of WiFi 2.4G.

Note: 1) The Average conducted power of WiFi is measured with RMS detector.

After Simultaneous Transmission Power Reduction:

Wi-Fi 2450MHz	Channel	Tune-up	Average Power (dBm) for Data Rates (Mbps)							
			1	2	5.5	11	/	/	/	/
802.11b	1	15.50	14.53	14.44	14.38	14.05	/	/	/	/
	6	15.50	14.79	14.71	14.67	14.25	/	/	/	/
	11	15.50	14.35	14.36	14.25	13.92	/	/	/	/
802.11g	Channel	Tune-up	6	9	12	18	24	36	48	54
	1	15.00	13.64	13.55	13.48	13.20	12.87	12.17	11.36	11.20
	6	15.00	13.92	13.83	13.70	13.16	12.85	12.20	11.40	11.17
	11	15.00	13.58	13.39	13.00	12.81	12.64	12.03	11.24	11.08
802.11n (HT20)	Channel	Tune-up	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
	1	13.00	10.51	10.22	9.76	9.27	8.72	8.66	8.43	8.11
	6	13.00	10.65	10.41	9.90	9.46	8.97	8.71	8.39	8.05
	11	13.00	10.62	10.42	9.94	9.55	8.99	8.60	8.45	8.08

Table 29: Conducted power measurement results of WiFi 2.4G.

Note: 1) The Average conducted power of WiFi is measured with RMS detector.

7.1.14 Conducted power measurements of BT

The output power of BT antenna is as following:

BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	39CH	78CH
DH5	9.00	6.75	8.37	7.29
2DH5	9.00	4.44	6.03	5.02
3DH5	9.00	4.53	6.03	4.97

BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	19CH	39CH
BT 4.0	9.00	2.71	5.19	3.22

Table 30: Conducted power measurement results of BT.

Note: The conducted power of BT is measured with RMS detector.

7.2 SAR measurement Results

General Notes:

- 1) Per KDB447498 D01v05r02, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.
- 2) Per KDB447498 D01v05r02, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.When the maximum output power variation across the required test channels is $> \frac{1}{2}\text{ dB}$, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/Kg}$; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR $< 1.45\text{W/Kg}$, only one repeated measurement is required.
- 4) Per KDB941225 D06v02, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04v01r02, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is $\leq 1.2\text{ W/kg}$, no additional SAR evaluations using a headset are required.
- 6) For SAR test, the Main Antenna and Second Antenna are set to the MAX transmit power level respectively and test the SAR respectively in all applicable RF exposure conditions. Some AT commands are supplied to fix the operation state and choose the antenna, and only one TX antenna is chosen and tested at a time. All independent antennas are completely covered by the appropriate SAR measurements and all simultaneous transmission possibilities are fully considered.
- 7) Additional SAR tests in simultaneous transmission fixed power reduction scenario are also tested in some frequency bands and test positions, which are used to ensure simultaneous transmission SAR test exclusion. (Refer to Section 7.3.4 for details). The standalone SAR compliance still uses the SAR results tested at the maximum output power level without any power reduction.
- 8) Per KDB865664 D02v01r01, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is $> 1.5\text{ W/kg}$, or $> 7.0\text{ W/kg}$ for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing(Refer to the blue SAR test results in the tables of Section 7.3 and appendix B for detailed SAR plots).

GSM Notes:

- 1) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
- 2) Per KDB648474 D04v01r02, the device does not support DTM function. Body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.

LTE Notes:

- 1) The LTE test configurations are determined according to KDB941225 D05 SAR for LTE Devices v02r03. The general test procedures used for SAR testing can be found in Section 6.4.
- 2) A-MPR was disabled for all SAR test by setting NS_01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI)
- 3) For TDD LTE, SAR is tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7 for Frame structure type 2.

WiFi Notes:

Per KDB248227D01v02r01:

- 1) When reported SAR for the initial test position is $\leq 0.4\text{W/kg}$, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is $\leq 0.8\text{W/kg}$ or all test positions are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested..
- 2) When the DSSS *reported* SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8\text{ W/kg}$, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 3) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{ W/kg}$, SAR measurement is not required for 2.4 GHz 802.11g/n OFDM configurations
- 4) The highest SAR measured for the initial test position or initial test configuration should be used to determine SAR test exclusion according to the sum of 1-g SAR and SAR peak to location ratio provisions in KDB 447498. In addition, a test lab may also choose to perform standalone SAR measurements for test positions and 802.11 configurations that are not required by the initial test position or initial test configuration procedures and apply the results to determine simultaneous transmission SAR test exclusion, according to sum of 1-g and SAR peak to location ratio requirements to reduce the number of simultaneous transmission SAR measurements.

7.2.1 SAR measurement Result of GSM850(Second Antenna)

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Left Hand Touched	190/836.6	GSM	0.377	0.206	-0.140	29.90	30.50	0.433	21.7°C
Left Hand Tilted 15°	190/836.6	GSM	0.330	0.172	-0.100	29.90	30.50	0.379	21.7°C
Right Hand Touched	190/836.6	GSM	0.329	0.205	0.120	29.90	30.50	0.378	21.7°C
Right Hand Tilted 15°	190/836.6	GSM	0.305	0.193	-0.080	29.90	30.50	0.350	21.7°C
Left Hand Touched	128/824.2	GSM	0.374	0.205	0.120	29.57	30.50	0.463	21.7°C
Left Hand Touched	251/848.8	GSM	0.361	0.198	-0.030	30.03	30.50	0.402	21.7°C
Tested at the worst position with SIM2									
Left Hand Touched	128/824.2	GSM	0.374	0.206	-0.090	29.57	30.50	0.463	21.7°C
Tested at the worst position with SIM2 and battery 2#									
Left Hand Touched	128/824.2	GSM	0.338	0.185	0.010	29.57	30.50	0.419	21.7°C

Table 31: Head SAR test results of GSM850

Test Position of Body-Worn with 15mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Front Side	190/836.6	GSM	0.100	0.074	0.040	29.90	30.50	0.115	21.7°C
Back Side	190/836.6	GSM	0.106	0.078	-0.110	29.90	30.50	0.122	21.7°C
Tested at the worst position with SIM2									
Back Side	190/836.6	GSM	0.104	0.077	-0.080	29.90	30.50	0.119	21.7°C
Tested at the worst position with SIM2 and battery 2#									
Back Side	190/836.6	GSM	0.080	0.058	-0.040	29.90	30.50	0.092	21.7°C

Table 32: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Front Side	190/836.6	GPRS 2TS	0.115	0.082	-0.050	26.70	27.50	0.138	21.7°C
Back Side	190/836.6	GPRS 2TS	0.145	0.086	0.170	26.70	27.50	0.174	21.7°C
Left Side	190/836.6	GPRS 2TS	0.087	0.058	-0.020	26.70	27.50	0.104	21.7°C
Right Side	190/836.6	GPRS 2TS	0.023	0.015	-0.020	26.70	27.50	0.027	21.7°C
Top Side	190/836.6	GPRS 2TS	0.069	0.037	-0.180	26.70	27.50	0.083	21.7°C
Tested at the worst position with SIM2									
Back Side	190/836.6	GPRS 2TS	0.118	0.080	-0.170	26.70	27.50	0.142	21.7°C
Tested at the worst position with battery 2#									
Back Side	190/836.6	GPRS 2TS	0.119	0.071	0.040	26.70	27.50	0.143	21.7°C

Table 33: Hotspot SAR test results of GSM850

Note: Per KDB648474D04, 10-g Extremity SAR was not evaluated for this frequency band since the hotspot 1-g reported SAR < 1.2W/kg.

7.2.2 SAR measurement Result of GSM1900(Second Antenna)

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
Left Hand Touched	661/1880	GSM	0.462	0.234	0.160	25.36	27.00	0.674	21.7°C
Left Hand Tilted 15°	661/1880	GSM	0.482	0.236	-0.130	25.36	27.00	0.703	21.7°C
Right Hand Touched	661/1880	GSM	0.531	0.262	0.160	25.36	27.00	0.775	21.7°C
Right Hand Tilted 15°	661/1880	GSM	0.619	0.291	-0.080	25.36	27.00	0.903	21.7°C
Right Hand Tilted 15°	512/1850.2	GSM	0.528	0.262	0.020	25.60	27.00	0.729	21.7°C
Right Hand Tilted 15°	810/1909.8	GSM	0.753	0.367	-0.070	25.83	27.00	0.986	21.7°C
Tested at the worst position with battery 2#									
Right Hand Tilted 15°	810/1909.8	GSM	0.704	0.332	0.140	25.83	27.00	0.922	21.7°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Right Hand Tilted 15°	810/1909.8	GSM	0.642	0.302	0.010	25.83	27.00	0.840	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with SIM2									
Right Hand Tilted 15°	810/1909.8	GSM	0.651	0.310	0.180	25.83	27.00	0.852	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with SIM2 and battery 2#									
Right Hand Tilted 15°	810/1909.8	GSM	0.692	0.328	0.040	25.83	27.00	0.906	21.5°C

Table 34: Head SAR test results of GSM1900

Test Position of Body-Worn with 15mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
Front Side	661/1880	GSM	0.048	0.028	0.090	25.36	27.00	0.070	21.1°C
Back Side	661/1880	GSM	0.060	0.033	0.130	25.36	27.00	0.087	21.1°C
Tested at the worst position with battery 2#									
Back Side	661/1880	GSM	0.069	0.038	0.070	25.36	27.00	0.101	21.1°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Back Side	661/1880	GSM	0.085	0.048	-0.050	25.36	27.00	0.124	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with SIM2									
Back Side	661/1880	GSM	0.079	0.045	-0.130	25.36	27.00	0.116	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 2#									
Back Side	661/1880	GSM	0.064	0.036	-0.090	25.36	27.00	0.094	21.5°C

Table 35: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
Front Side	661/1880	GPRS 2TS	0.092	0.049	-0.120	22.29	24.00	0.137	21.1°C
Back Side	661/1880	GPRS 2TS	0.128	0.066	0.070	22.29	24.00	0.190	21.1°C
Left Side	661/1880	GPRS 2TS	0.034	0.014	0.100	22.29	24.00	0.050	21.1°C
Right Side	661/1880	GPRS 2TS	0.006	0.003	0.060	22.29	24.00	0.009	21.1°C
Top Side	661/1880	GPRS 2TS	0.170	0.084	-0.120	22.29	24.00	0.252	21.1°C
Tested at the worst position with battery 2#									
Top Side	661/1880	GPRS 2TS	0.174	0.086	0.190	22.29	24.00	0.258	21.1°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Top Side	661/1880	GPRS 2TS	0.267	0.131	0.160	22.29	24.00	0.396	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with SIM2									
Top Side	661/1880	GPRS 2TS	0.273	0.135	0.020	22.29	24.00	0.405	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with SIM2 and battery 2#									
Top Side	661/1880	GPRS 2TS	0.230	0.116	-0.030	22.29	24.00	0.341	21.5°C

Table 36: Hotspot SAR test results of GSM1900

Note: Per KDB648474D04, 10-g Extremity SAR was not evaluated for this frequency band since the hotspot 1-g reported SAR < 1.2W/kg.

7.2.3 SAR measurement Result of UMTS Band V(Second Antenna)

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Left Hand Touched	4182/836.4	RMC	0.448	0.249	0.020	21.86	22.30	0.496	21.4°C
Left Hand Tilted 15°	4182/836.4	RMC	0.324	0.219	0.140	21.86	22.30	0.359	21.4°C
Right Hand Touched	4182/836.4	RMC	0.390	0.239	0.080	21.86	22.30	0.432	21.4°C
Right Hand Tilted 15°	4182/836.4	RMC	0.390	0.239	0.090	21.86	22.30	0.432	21.4°C
Left Hand Touched	4132/826.4	RMC	0.435	0.242	-0.020	21.77	22.30	0.491	21.4°C
Left Hand Touched	4233/846.6	RMC	0.418	0.232	0.030	21.86	22.30	0.463	21.4°C
Tested at the worst position with battery 2#									
Left Hand Touched	4182/836.4	RMC	0.489	0.268	0.130	21.86	22.30	0.541	21.4°C

Table 37: Head SAR test results of UMTS Band V

Test Position of Body-Worn with 15mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Front Side	4182/836.4	RMC	0.101	0.074	-0.090	21.86	22.30	0.112	21.6°C
Back Side	4182/836.4	RMC	0.117	0.085	-0.060	21.86	22.30	0.129	21.6°C
Tested at the worst position with battery 2#									
Back Side	4182/836.4	RMC	0.115	0.083	0.010	21.86	22.30	0.127	21.6°C

Table 38: Body-Worn SAR test results of UMTS Band V

Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Front Side	4182/836.4	RMC	0.143	0.087	-0.180	21.86	22.30	0.158	21.6°C
Back Side	4182/836.4	RMC	0.174	0.102	-0.080	21.86	22.30	0.193	21.6°C
Left Side	4182/836.4	RMC	0.113	0.079	-0.190	21.86	22.30	0.125	21.6°C
Right Side	4182/836.4	RMC	0.030	0.021	0.040	21.86	22.30	0.033	21.6°C
Top Side	4182/836.4	RMC	0.122	0.062	0.180	21.86	22.30	0.135	21.6°C
Tested at the worst position with battery 2#									
Back Side	4182/836.4	RMC	0.184	0.109	-0.080	21.86	22.30	0.204	21.6°C

Table 39: Hotspot SAR test results of UMTS Band V

Note: Per KDB648474D04, 10-g Extremity SAR was not evaluated for this frequency band since the hotspot 1-g reported SAR < 1.2W/kg.

7.2.4 SAR measurement Result of LTE Band V(Second Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	20525/836.5	10M QPSK 1RB#0	0.388	0.216	-0.100	20.44	20.50	0.393	21.7°C
Left Hand Tilted 15°	20525/836.5	10M QPSK 1RB#0	0.320	0.190	-0.190	20.44	20.50	0.324	21.7°C
Right Hand Touched	20525/836.5	10M QPSK 1RB#0	0.371	0.245	0.080	20.44	20.50	0.376	21.7°C
Right Hand Tilted 15°	20525/836.5	10M QPSK 1RB#0	0.320	0.174	-0.130	20.44	20.50	0.324	21.7°C
Left Hand Touched	20450/829	10M QPSK 1RB#0	0.373	0.203	0.030	20.28	20.50	0.392	21.7°C
Left Hand Touched	20600/844	10M QPSK 1RB#0	0.363	0.200	0.040	20.25	20.50	0.385	21.7°C
50%RB									
Left Hand Touched	20450/829	10M QPSK 50%RB#0	0.295	0.184	-0.010	19.11	19.50	0.323	21.7°C
Left Hand Tilted 15°	20450/829	10M QPSK 50%RB#0	0.256	0.152	-0.020	19.11	19.50	0.280	21.7°C
Right Hand Touched	20450/829	10M QPSK 50%RB#0	0.271	0.181	0.010	19.11	19.50	0.296	21.7°C
Right Hand Tilted 15°	20450/829	10M QPSK 50%RB#0	0.248	0.135	0.040	19.11	19.50	0.271	21.7°C
Tested at the worst position with battery 2#									
Left Hand Touched	20525/836.5	10M QPSK 1RB#0	0.371	0.202	0.100	20.44	20.50	0.376	21.7°C

Table 40: Head SAR test results of LTE Band V

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	20525/836.5	10M QPSK 1RB#0	0.077	0.053	0.130	20.44	20.50	0.078	21.7°C
Back Side	20525/836.5	10M QPSK 1RB#0	0.084	0.062	0.010	20.44	20.50	0.085	21.7°C
50%RB									
Front Side	20450/829	10M QPSK 50%RB#0	0.059	0.040	-0.150	19.11	19.50	0.065	21.7°C
Back Side	20450/829	10M QPSK 50%RB#0	0.064	0.043	-0.110	19.11	19.50	0.070	21.7°C
Tested at the worst position with battery 2#									
Back Side	20525/836.5	10M QPSK 1RB#0	0.071	0.052	-0.110	20.44	20.50	0.072	21.7°C

Table 41: Body-Worn SAR test results of LTE Band V

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	20525/836.5	10M QPSK 1RB#0	0.119	0.076	0.170	20.44	20.50	0.121	21.7°C
Back Side	20525/836.5	10M QPSK 1RB#0	0.136	0.080	-0.100	20.44	20.50	0.138	21.7°C
Left Side	20525/836.5	10M QPSK 1RB#0	0.109	0.073	0.050	20.44	20.50	0.111	21.7°C
Right Side	20525/836.5	10M QPSK 1RB#0	0.028	0.019	0.080	20.44	20.50	0.028	21.7°C
Top Side	20525/836.5	10M QPSK 1RB#0	0.093	0.044	0.100	20.44	20.50	0.094	21.7°C
50%RB									
Front Side	20450/829	10M QPSK 50%RB#0	0.089	0.057	0.030	19.11	19.50	0.097	21.7°C
Back Side	20450/829	10M QPSK 50%RB#0	0.104	0.067	-0.040	19.11	19.50	0.114	21.7°C
Left Side	20450/829	10M QPSK 50%RB#0	0.087	0.059	0.040	19.11	19.50	0.095	21.7°C
Right Side	20450/829	10M QPSK 50%RB#0	0.023	0.015	-0.070	19.11	19.50	0.025	21.7°C
Top Side	20450/829	10M QPSK 50%RB#0	0.069	0.033	0.170	19.11	19.50	0.075	21.7°C
Tested at the worst position with battery 2#									
Back Side	20525/836.5	10M QPSK 1RB#0	0.099	0.058	-0.040	20.44	20.50	0.100	21.7°C

Table 42: Hotspot SAR test results of LTE Band V

Note: Per KDB648474D04, 10-g Extremity SAR was not evaluated for this frequency band since the hotspot 1-g reported SAR < 1.2W/kg.

7.2.5 SAR measurement Result of LTE Band VII(Second Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
1RB									
Left Hand Touched	21100/2535	20M QPSK 1RB#0	0.629	0.303	0.020	14.93	15.50	0.717	21.3°C
Left Hand Tilted 15°	21100/2535	20M QPSK 1RB#0	0.770	0.340	0.110	14.93	15.50	0.878	21.3°C
Left Hand Tilted 15°	20850/2510	20M QPSK 1RB#0	0.664	0.300	0.130	14.78	15.50	0.784	21.3°C
Left Hand Tilted 15°	21350/2560	20M QPSK 1RB#0	0.714	0.312	0.110	14.72	15.50	0.854	21.3°C
Right Hand Touched	21100/2535	20M QPSK 1RB#0	0.822	0.402	-0.190	14.93	15.50	0.937	21.3°C
Right Hand Touched-repeated	21100/2535	20M QPSK 1RB#0	0.782	0.380	-0.040	14.93	15.50	0.892	21.3°C
Right Hand Touched	20850/2510	20M QPSK 1RB#0	0.691	0.354	0.000	14.78	15.50	0.816	21.3°C
Right Hand Touched	21350/2560	20M QPSK 1RB#0	0.735	0.368	0.070	14.72	15.50	0.880	21.3°C
Right Hand Tilted 15°	21100/2535	20M QPSK 1RB#0	0.648	0.310	-0.020	14.93	15.50	0.739	21.3°C
50%RB									
Left Hand Touched	21100/2535	20M QPSK 50%RB#0	0.413	0.209	0.010	13.74	14.50	0.492	21.3°C
Left Hand Tilted 15°	21100/2535	20M QPSK 50%RB#0	0.464	0.223	0.030	13.74	14.50	0.553	21.3°C
Right Hand Touched	21100/2535	20M QPSK 50%RB#0	0.571	0.288	-0.100	13.74	14.50	0.680	21.3°C
Right Hand Tilted 15°	21100/2535	20M QPSK 50%RB#0	0.462	0.220	0.443	13.74	14.50	0.550	21.3°C
100%RB									
Left Hand Tilted 15°	21100/2535	20M QPSK 100%RB#0	0.467	0.226	0.000	13.65	14.50	0.568	21.3°C
Right Hand Touched	21100/2535	20M QPSK 100%RB#0	0.546	0.275	0.020	13.65	14.50	0.664	21.3°C
Tested at the worst position with battery 2#									
Right Hand Touched	21100/2535	20M QPSK 1RB#0	0.712	0.343	-0.120	14.93	15.50	0.812	21.3°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Right Hand Touched	21100/2535	20M QPSK 1RB#0	0.729	0.365	0.090	14.93	15.50	0.831	21.7°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 2#									
Right Hand Touched	21100/2535	20M QPSK 1RB#0	0.775	0.374	0.060	14.93	15.50	0.884	21.7°C

Table 43: Head SAR test results of LTE Band VII

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
1RB									
Front Side	21100/2535	20M QPSK 1RB#0	0.088	0.049	-0.160	14.93	15.50	0.101	21.5°C
Back Side	21100/2535	20M QPSK 1RB#0	0.086	0.048	0.010	14.93	15.50	0.098	21.5°C
50%RB									
Front Side	21100/2535	20M QPSK 50%RB#0	0.062	0.035	0.070	13.74	14.50	0.073	21.5°C
Back Side	21100/2535	20M QPSK 50%RB#0	0.059	0.033	0.190	13.74	14.50	0.070	21.5°C
Tested at the worst position with battery 2#									
Front Side	21100/2535	20M QPSK 1RB#0	0.071	0.039	-0.110	14.93	15.50	0.081	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Front Side	21100/2535	20M QPSK 1RB#0	0.071	0.041	0.110	14.93	15.50	0.081	21.3°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 2#									
Front Side	21100/2535	20M QPSK 1RB#0	0.063	0.036	0.170	14.93	15.50	0.072	21.3°C

Table 44: Body-Worn SAR test results of LTE Band VII

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
1RB									
Front Side	21100/2535	20M QPSK 1RB#0	0.161	0.086	0.100	14.93	15.50	0.184	21.5°C
Back Side	21100/2535	20M QPSK 1RB#0	0.173	0.094	-0.070	14.93	15.50	0.197	21.5°C
Left Side	21100/2535	20M QPSK 1RB#0	0.086	0.036	-0.150	14.93	15.50	0.098	21.5°C
Right Side	21100/2535	20M QPSK 1RB#0	0.009	0.005	0.160	14.93	15.50	0.010	21.5°C
Top Side	21100/2535	20M QPSK 1RB#0	0.263	0.137	0.190	14.93	15.50	0.300	21.5°C
50%RB									
Front Side	21100/2535	20M QPSK 50%RB#0	0.115	0.063	0.070	13.74	14.50	0.137	21.5°C
Back Side	21100/2535	20M QPSK 50%RB#0	0.122	0.067	-0.160	13.74	14.50	0.145	21.5°C
Left Side	21100/2535	20M QPSK 50%RB#0	0.064	0.027	0.070	13.74	14.50	0.076	21.5°C
Right Side	21100/2535	20M QPSK 50%RB#0	0.008	0.004	0.110	13.74	14.50	0.009	21.5°C
Top Side	21100/2535	20M QPSK 50%RB#0	0.190	0.099	0.160	13.74	14.50	0.226	21.5°C
Tested at the worst position with battery 2#									
Top Side	21100/2535	20M QPSK 1RB#0	0.205	0.108	-0.110	14.93	15.50	0.234	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Top Side	21100/2535	20M QPSK 1RB#0	0.194	0.107	0.100	14.93	15.50	0.221	21.3°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 2#									
Top Side	21100/2535	20M QPSK 1RB#0	0.138	0.074	0.130	14.93	15.50	0.157	21.3°C

Table 45: Hotspot SAR test results of LTE Band VII

Note: Per KDB648474D04, 10-g Extremity SAR was not evaluated for this frequency band since the hotspot 1-g reported SAR < 1.2W/kg.

7.2.6 SAR measurement Result of LTE Band XXXVIII(Second Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	38000/2595	20M QPSK 1RB#50	0.594	0.262	0.130	17.27	17.50	0.626	21.7°C
Left Hand Tilted 15°	38000/2595	20M QPSK 1RB#50	0.654	0.278	0.110	17.27	17.50	0.690	21.7°C
Right Hand Touched	38000/2595	20M QPSK 1RB#50	0.488	0.244	-0.060	17.27	17.50	0.515	21.7°C
Right Hand Tilted 15°	38000/2595	20M QPSK 1RB#50	0.494	0.213	-0.150	17.27	17.50	0.521	21.7°C
Left Hand Tilted 15°	37850/2580	20M QPSK 1RB#50	0.542	0.243	-0.150	17.15	17.50	0.587	21.7°C
Left Hand Tilted 15°	38150/2610	20M QPSK 1RB#50	0.628	0.262	-0.040	17.25	17.50	0.665	21.7°C
50%RB									
Left Hand Touched	38000/2595	20M QPSK 50%RB#0	0.419	0.182	0.040	15.75	16.50	0.498	21.7°C
Left Hand Tilted 15°	38000/2595	20M QPSK 50%RB#0	0.434	0.190	-0.140	15.75	16.50	0.516	21.7°C
Right Hand Touched	38000/2595	20M QPSK 50%RB#0	0.366	0.196	-0.140	15.75	16.50	0.435	21.7°C
Right Hand Tilted 15°	38000/2595	20M QPSK 50%RB#0	0.340	0.165	-0.170	15.75	16.50	0.404	21.7°C
Tested at the worst position with battery 2#									
Left Hand Tilted 15°	38000/2595	20M QPSK 1RB#50	0.577	0.247	-0.010	17.27	17.50	0.608	21.7°C

Table 46: Head SAR test results of LTE Band XXXVIII

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	38000/2595	20M QPSK 1RB#50	0.089	0.048	0.100	17.27	17.50	0.093	21.3°C
Back Side	38000/2595	20M QPSK 1RB#50	0.081	0.044	-0.150	17.27	17.50	0.085	21.3°C
50%RB									
Front Side	38150/2610	20M QPSK 50%RB#0	0.074	0.040	0.140	15.77	16.50	0.088	21.3°C
Back Side	38150/2610	20M QPSK 50%RB#0	0.063	0.033	-0.100	15.77	16.50	0.074	21.3°C
Tested at the worst position with battery 2#									
Front Side	38000/2595	20M QPSK 1RB#50	0.100	0.053	-0.100	17.27	17.50	0.105	21.3°C

Table 47: Body-Worn SAR test results of LTE Band XXXVIII

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	38000/2595	20M QPSK 1RB#50	0.212	0.110	-0.190	17.27	17.50	0.224	21.3°C
Back Side	38000/2595	20M QPSK 1RB#50	0.156	0.083	0.040	17.27	17.50	0.164	21.3°C
Left Side	38000/2595	20M QPSK 1RB#50	0.102	0.044	0.030	17.27	17.50	0.108	21.3°C
Right Side	38000/2595	20M QPSK 1RB#50	0.016	0.009	0.000	17.27	17.50	0.017	21.3°C
Top Side	38000/2595	20M QPSK 1RB#50	0.218	0.122	-0.090	17.27	17.50	0.230	21.3°C
50%RB									
Front Side	38150/2610	20M QPSK 50%RB#0	0.161	0.081	-0.130	15.77	16.50	0.190	21.3°C
Back Side	38150/2610	20M QPSK 50%RB#0	0.133	0.068	-0.010	15.77	16.50	0.157	21.3°C
Left Side	38150/2610	20M QPSK 50%RB#0	0.075	0.034	-0.080	15.77	16.50	0.088	21.3°C
Right Side	38150/2610	20M QPSK 50%RB#0	0.015	0.008	0.160	15.77	16.50	0.018	21.3°C
Top Side	38150/2610	20M QPSK 50%RB#0	0.191	0.103	-0.020	15.77	16.50	0.226	21.3°C
Tested at the worst position with battery 2#									
Top Side	38000/2595	20M QPSK 1RB#50	0.260	0.141	-0.020	17.27	17.50	0.274	21.3°C

Table 48: Hotspot SAR test results of LTE Band XXXVIII

Note: Per KDB648474D04, 10-g Extremity SAR was not evaluated for this frequency band since the hotspot 1-g reported SAR < 1.2W/kg.

7.2.7 SAR measurement Result of GSM850(Main Antenna)

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
Left Hand Touched	190/836.6	GSM	0.166	0.116	0.190	32.24	33.50	0.222	21.0°C
Left Hand Tilted 15°	190/836.6	GSM	0.107	0.084	0.060	32.24	33.50	0.143	21.0°C
Right Hand Touched	190/836.6	GSM	0.203	0.157	0.000	32.24	33.50	0.271	21.0°C
Right Hand Tilted 15°	190/836.6	GSM	0.118	0.082	0.020	32.24	33.50	0.158	21.0°C
Right Hand Touched	128/824.2	GSM	0.189	0.145	-0.150	31.57	33.50	0.295	21.0°C
Right Hand Touched	251/848.8	GSM	0.201	0.152	0.180	32.46	33.50	0.255	21.0°C
Tested at the worst position with battery 2#									
Right Hand Touched	128/824.2	GSM	0.182	0.140	-0.150	31.57	33.50	0.284	21.0°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Right Hand Touched	128/824.2	GSM	0.140	0.110	0.160	31.57	33.50	0.218	21.7°C
RIO-L02 Tested at the worst position of RIO-L01 with SIM2									
Right Hand Touched	128/824.2	GSM	0.141	0.111	0.190	31.57	33.50	0.220	21.7°C
RIO-L02 Tested at the worst position of RIO-L01 with SIM2 and battery 2#									
Right Hand Touched	128/824.2	GSM	0.128	0.101	-0.040	31.57	33.50	0.200	21.7°C

Table 49: Head SAR test results of GSM850

Test Position of Body-Worn with 15mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
Front Side	190/836.6	GSM	0.198	0.141	-0.060	32.24	33.50	0.265	21.5°C
Back Side	190/836.6	GSM	0.261	0.202	-0.040	32.24	33.50	0.349	21.5°C
Tested at the worst position with battery 2#									
Back Side	190/836.6	GSM	0.247	0.191	-0.040	32.24	33.50	0.330	21.5°C
RIO-L01 Tested at the worst position of RIO-L01 battery 1#									
Back Side	190/836.6	GSM	0.250	0.196	-0.080	32.24	33.50	0.334	21.7°C
RIO-L02 Tested at the worst position of RIO-L01 with SIM2									
Back Side	190/836.6	GSM	0.252	0.197	-0.100	32.24	33.50	0.337	21.7°C
RIO-L02 Tested at the worst position of RIO-L01 with SIM2 and battery 2#									
Back Side	190/836.6	GSM	0.236	0.185	0.000	32.24	33.50	0.315	21.7°C

Table 50: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
Front Side	190/836.6	GPRS 2TS	0.205	0.146	-0.110	28.55	30.50	0.321	21.5°C
Back Side	190/836.6	GPRS 2TS	0.219	0.133	-0.140	28.55	30.50	0.343	21.5°C
Left Side	190/836.6	GPRS 2TS	0.263	0.178	-0.010	28.55	30.50	0.412	21.5°C
Right Side	190/836.6	GPRS 2TS	0.289	0.197	0.050	28.55	30.50	0.453	21.5°C
Bottom Side	190/836.6	GPRS 2TS	0.074	0.042	0.180	28.55	30.50	0.116	21.5°C
Tested at the worst position with battery 2#									
Right Side	190/836.6	GPRS 2TS	0.297	0.203	-0.110	28.55	30.50	0.465	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Right Side	190/836.6	GPRS 2TS	0.263	0.181	-0.110	28.55	30.50	0.412	21.7°C
RIO-L02 Tested at the worst position of RIO-L01 with SIM2									
Right Side	190/836.6	GPRS 2TS	0.261	0.180	-0.060	28.55	30.50	0.409	21.7°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 2#									
Right Side	190/836.6	GPRS 2TS	0.211	0.145	-0.120	28.55	30.50	0.331	21.7°C

Table 51: Hotspot SAR test results of GSM850

Note: Per KDB648474D04, 10-g Extremity SAR was not evaluated for this frequency band since the hotspot 1-g reported SAR < 1.2W/kg.

7.2.8 SAR measurement Result of GSM1900(Main Antenna)

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
Left Hand Touched	661/1880	GSM	0.082	0.052	0.060	29.05	30.50	0.115	21.7°C
Left Hand Tilted 15°	661/1880	GSM	0.043	0.024	0.050	29.05	30.50	0.060	21.7°C
Right Hand Touched	661/1880	GSM	0.051	0.030	0.100	29.05	30.50	0.071	21.7°C
Right Hand Tilted 15°	661/1880	GSM	0.042	0.025	0.090	29.05	30.50	0.059	21.7°C
Left Hand Touched	512/1850.2	GSM	0.069	0.041	-0.080	28.88	30.50	0.100	21.7°C
Left Hand Touched	810/1909.8	GSM	0.108	0.068	0.010	29.33	30.50	0.141	21.7°C
Tested at the worst position with battery 2#									
Left Hand Touched	810/1909.8	GSM	0.105	0.066	-0.030	29.33	30.50	0.137	21.7°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Left Hand Touched	810/1909.8	GSM	0.124	0.078	-0.140	29.33	30.50	0.162	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with SIM2									
Left Hand Touched	810/1909.8	GSM	0.124	0.079	-0.170	29.33	30.50	0.162	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with SIM2 and battery 2#									
Left Hand Touched	810/1909.8	GSM	0.094	0.060	-0.070	29.33	30.50	0.124	21.5°C

Table 52: Head SAR test results of GSM1900

Test Position of Body-Worn with 15mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
Front Side	661/1880	GSM	0.268	0.156	0.170	29.05	30.50	0.374	21.1°C
Back Side	661/1880	GSM	0.266	0.155	-0.050	29.05	30.50	0.371	21.1°C
Tested at the worst position with battery 2#									
Front Side	661/1880	GSM	0.327	0.189	0.010	29.05	30.50	0.457	21.1°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Front Side	661/1880	GSM	0.328	0.192	0.030	29.05	30.50	0.458	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with SIM2									
Front Side	661/1880	GSM	0.324	0.190	0.100	29.05	30.50	0.452	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 2#									
Front Side	661/1880	GSM	0.215	0.125	0.180	29.05	30.50	0.300	21.5°C

Table 53: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
Front Side	661/1880	GPRS 2TS	0.392	0.217	0.190	24.39	25.50	0.506	21.1°C
Back Side	661/1880	GPRS 2TS	0.421	0.234	-0.040	24.39	25.50	0.544	21.1°C
Left Side	661/1880	GPRS 2TS	0.103	0.059	-0.060	24.39	25.50	0.133	21.1°C
Right Side	661/1880	GPRS 2TS	0.048	0.027	0.100	24.39	25.50	0.061	21.1°C
Bottom Side	661/1880	GPRS 2TS	0.838	0.441	-0.090	24.39	25.50	1.082	21.1°C
Bottom Side	512/1850.2	GPRS 2TS	0.767	0.405	-0.050	24.46	25.50	0.975	21.1°C
Bottom Side	810/1909.8	GPRS 2TS	1.110	0.580	0.000	24.75	25.50	1.319	21.1°C
Bottom Side-repeated	810/1909.8	GPRS 2TS	1.110	0.581	-0.040	24.75	25.50	1.319	21.1°C
Tested at the worst position with battery 2#									
Bottom Side	810/1909.8	GPRS 2TS	1.090	0.568	0.110	24.75	25.50	1.295	21.1°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Bottom Side	810/1909.8	GPRS 2TS	1.090	0.569	0.020	24.75	25.50	1.295	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with SIM2									
Bottom Side	810/1909.8	GPRS 2TS	1.030	0.535	-0.150	24.75	25.50	1.224	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 2#									
Bottom Side	810/1909.8	GPRS 2TS	1.100	0.574	0.170	24.75	25.50	1.307	21.5°C

Table 54: Hotspot SAR test results of GSM1900

Per KDB648474D04, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	10-g Extremity SAR
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
Front Side	661/1880	GPRS 2TS	0.392	0.217	0.190	24.39	27.50	0.802	No
Back Side	661/1880	GPRS 2TS	0.421	0.234	-0.040	24.39	27.50	0.862	No
Left Side	661/1880	GPRS 2TS	0.103	0.059	-0.060	24.39	27.50	0.211	No
Right Side	661/1880	GPRS 2TS	0.048	0.027	0.100	24.39	27.50	0.097	No
Bottom Side	661/1880	GPRS 2TS	0.838	0.441	-0.090	24.39	27.50	1.715	Yes
Bottom Side	512/1850.2	GPRS 2TS	0.767	0.405	-0.050	24.46	27.50	1.545	Yes
Bottom Side	810/1909.8	GPRS 2TS	1.110	0.580	0.000	24.75	27.50	2.091	Yes
Bottom Side-repeated	810/1909.8	GPRS 2TS	1.110	0.581	-0.040	24.75	27.50	2.091	Yes
Tested at the Worst position with battery 2#									
Bottom Side	810/1909.8	GPRS 2TS	1.090	0.568	0.110	24.75	27.50	2.053	Yes

Table 55: 10-g Extremity SAR test reduction evaluation of GSM1900

Note : According to the table above , 10-g Extremity SAR test is required for this frequency band.

According to the table above , only **bottom side** 10-g Extremity SAR test are required for this frequency band:

Test Position of 10-g Extremity with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled 10-g SAR (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
Bottom Side	661/1880	GPRS 2TS	2.940	1.190	-0.090	25.74	27.50	1.785	21.1°C
Bottom Side	512/1850.2	GPRS 2TS	2.770	1.160	-0.120	25.92	27.50	1.669	21.1°C
Bottom Side	810/1909.8	GPRS 2TS	2.380	0.924	-0.190	26.22	27.50	1.241	21.1°C
Tested at the Worst position with battery 2#									
Bottom Side	661/1880	GPRS 2TS	2.840	1.150	0.120	25.74	27.50	1.725	21.1°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Bottom Side	661/1880	GPRS 2TS	3.500	1.500	-0.100	25.74	27.50	2.250	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with SIM2									
Bottom Side	661/1880	GPRS 2TS	3.200	1.340	-0.100	25.74	27.50	2.010	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 2#									
Bottom Side	661/1880	GPRS 2TS	3.320	1.410	-0.090	25.74	27.50	2.115	21.5°C

Table 56: 10-g Extremity SAR test results of GSM1900

7.2.9 SAR measurement Result of UMTS Band V(Main Antenna)

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Left Hand Touched	4182/836.4	RMC	0.207	0.143	-0.160	24.52	24.80	0.221	21.4°C
Left Hand Tilted 15°	4182/836.4	RMC	0.111	0.078	0.090	24.52	24.80	0.118	21.4°C
Right Hand Touched	4182/836.4	RMC	0.246	0.187	-0.150	24.52	24.80	0.262	21.4°C
Right Hand Tilted 15°	4182/836.4	RMC	0.121	0.085	0.110	24.52	24.80	0.129	21.4°C
Right Hand Touched	4132/826.4	RMC	0.205	0.142	0.160	24.44	24.80	0.223	21.4°C
Right Hand Touched	4233/846.6	RMC	0.273	0.207	0.180	24.55	24.80	0.289	21.4°C
Tested at the worst position with battery 2#									
Right Hand Touched	4233/846.6	RMC	0.231	0.176	-0.080	24.55	24.80	0.245	21.4°C

Table 57: Head SAR test results of UMTS Band V

Test Position of Body-Worn with 15mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Front Side	4182/836.4	RMC	0.247	0.193	0.020	24.52	24.80	0.263	21.6°C
Back Side	4182/836.4	RMC	0.328	0.256	0.090	24.52	24.80	0.350	21.6°C
Tested at the worst position with battery 2#									
Back Side	4182/836.4	RMC	0.303	0.237	0.120	24.52	24.80	0.323	21.6°C

Table 58: Body-Worn SAR test results of UMTS Band V

Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Front Side	4182/836.4	RMC	0.269	0.212	-0.030	24.52	24.80	0.287	21.6°C
Back Side	4182/836.4	RMC	0.355	0.211	0.120	24.52	24.80	0.379	21.6°C
Left Side	4182/836.4	RMC	0.316	0.217	-0.080	24.52	24.80	0.337	21.6°C
Right Side	4182/836.4	RMC	0.365	0.251	-0.130	24.52	24.80	0.389	21.6°C
Bottom Side	4182/836.4	RMC	0.119	0.066	-0.060	24.52	24.80	0.127	21.6°C
Tested at the worst position with battery 2#									
Right Side	4182/836.4	RMC	0.395	0.271	0.090	24.52	24.80	0.421	21.6°C

Table 59: Hotspot SAR test results of UMTS Band V

7.2.10 SAR measurement Result of LTE Band V(Main Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	20525/836.5	10M QPSK 1RB#0	0.146	0.114	0.080	23.47	24.00	0.165	21.7°C
Left Hand Tilted 15°	20525/836.5	10M QPSK 1RB#0	0.084	0.066	0.100	23.47	24.00	0.095	21.7°C
Right Hand Touched	20525/836.5	10M QPSK 1RB#0	0.174	0.135	-0.100	23.47	24.00	0.197	21.7°C
Right Hand Tilted 15°	20525/836.5	10M QPSK 1RB#0	0.071	0.050	-0.040	23.47	24.00	0.081	21.7°C
Right Hand Touched	20450/829	10M QPSK 1RB#0	0.161	0.124	0.000	23.41	24.00	0.184	21.7°C
Right Hand Touched	20600/844	10M QPSK 1RB#0	0.208	0.162	-0.070	23.35	24.00	0.242	21.7°C
50%RB									
Left Hand Touched	20450/829	10M QPSK 50%RB#0	0.083	0.057	0.020	22.29	23.00	0.098	21.7°C
Left Hand Tilted 15°	20450/829	10M QPSK 50%RB#0	0.050	0.034	0.190	22.29	23.00	0.059	21.7°C
Right Hand Touched	20450/829	10M QPSK 50%RB#0	0.124	0.086	0.090	22.29	23.00	0.146	21.7°C
Right Hand Tilted 15°	20450/829	10M QPSK 50%RB#0	0.061	0.049	0.190	22.29	23.00	0.072	21.7°C
Tested at the worst position with battery 2#									
Right Hand Touched	20600/844	10M QPSK 1RB#0	0.144	0.114	0.040	23.35	24.00	0.167	21.7°C

Table 60: Head SAR test results of LTE Band V

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	20525/836.5	10M QPSK 1RB#0	0.161	0.126	0.030	23.47	24.00	0.182	21.7°C
Back Side	20525/836.5	10M QPSK 1RB#0	0.196	0.152	-0.020	23.47	24.00	0.221	21.7°C
50%RB									
Front Side	20450/829	10M QPSK 50%RB#0	0.124	0.088	-0.020	22.29	23.00	0.146	21.7°C
Back Side	20450/829	10M QPSK 50%RB#0	0.152	0.108	-0.140	22.29	23.00	0.179	21.7°C
Tested at the worst position with battery 2#									
Back Side	20525/836.5	10M QPSK 1RB#0	0.196	0.152	-0.100	23.47	24.00	0.221	21.7°C

Table 61: Body-Worn SAR test results of LTE Band V

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	20525/836.5	10M QPSK 1RB#0	0.177	0.107	-0.080	23.47	24.00	0.200	21.7°C
Back Side	20525/836.5	10M QPSK 1RB#0	0.216	0.132	0.080	23.47	24.00	0.244	21.7°C
Left Side	20525/836.5	10M QPSK 1RB#0	0.156	0.105	-0.130	23.47	24.00	0.176	21.7°C
Right Side	20525/836.5	10M QPSK 1RB#0	0.278	0.189	-0.120	23.47	24.00	0.314	21.7°C
Bottom Side	20525/836.5	10M QPSK 1RB#0	0.077	0.045	-0.170	23.47	24.00	0.087	21.7°C
50%RB									
Front Side	20450/829	10M QPSK 50%RB#0	0.133	0.090	-0.080	22.29	23.00	0.157	21.7°C
Back Side	20450/829	10M QPSK 50%RB#0	0.167	0.101	-0.040	22.29	23.00	0.197	21.7°C
Left Side	20450/829	10M QPSK 50%RB#0	0.128	0.086	-0.050	22.29	23.00	0.151	21.7°C
Right Side	20450/829	10M QPSK 50%RB#0	0.207	0.143	-0.040	22.29	23.00	0.244	21.7°C
Bottom Side	20450/829	10M QPSK 50%RB#0	0.065	0.036	-0.040	22.29	23.00	0.076	21.7°C
Tested at the worst position with battery 2#									
Right Side	20525/836.5	10M QPSK 1RB#0	0.270	0.187	-0.120	23.47	24.00	0.305	21.7°C

Table 62: Hotspot SAR test results of LTE Band V

7.2.11 SAR measurement Result of LTE Band VII(Main Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
1RB									
Left Hand Touched	21350/2560	20M QPSK 1RB#0	0.130	0.065	0.180	23.45	23.70	0.138	21.3°C
Left Hand Tilted 15°	21350/2560	20M QPSK 1RB#0	0.089	0.036	0.120	23.45	23.70	0.094	21.3°C
Right Hand Touched	21350/2560	20M QPSK 1RB#0	0.146	0.081	0.030	23.45	23.70	0.155	21.3°C
Right Hand Tilted 15°	21350/2560	20M QPSK 1RB#0	0.076	0.036	-0.030	23.45	23.70	0.081	21.3°C
Right Hand Touched	20850/2510	20M QPSK 1RB#0	0.089	0.046	-0.110	23.28	23.70	0.098	21.3°C
Right Hand Touched	21100/2535	20M QPSK 1RB#0	0.120	0.061	0.160	23.29	23.70	0.132	21.3°C
50%RB									
Left Hand Touched	21100/2535	20M QPSK 50%RB#0	0.119	0.053	0.170	22.30	23.00	0.140	21.3°C
Left Hand Tilted 15°	21100/2535	20M QPSK 50%RB#0	0.086	0.035	0.180	22.30	23.00	0.101	21.3°C
Right Hand Touched	21100/2535	20M QPSK 50%RB#0	0.088	0.045	0.150	22.30	23.00	0.103	21.3°C
Right Hand Tilted 15°	21100/2535	20M QPSK 50%RB#0	0.075	0.035	0.100	22.30	23.00	0.088	21.3°C
Tested at the worst position with battery 2#									
Right Hand Touched	21350/2560	20M QPSK 1RB#0	0.105	0.055	-0.130	23.45	23.70	0.111	21.3°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Right Hand Touched	21350/2560	20M QPSK 1RB#0	0.114	0.061	0.030	23.45	23.70	0.121	21.8°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 2#									
Right Hand Touched	21350/2560	20M QPSK 1RB#0	0.161	0.082	0.170	23.45	23.70	0.171	21.8°C

Table 63: Head SAR test results of LTE Band VII

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
1RB									
Front Side	21350/2560	20M QPSK 1RB#0	0.649	0.356	0.010	23.45	23.70	0.687	21.5°C
Back Side	21350/2560	20M QPSK 1RB#0	0.821	0.434	0.040	23.45	23.70	0.870	21.5°C
Back Side-repeated	21350/2560	20M QPSK 1RB#0	0.740	0.392	0.080	23.45	23.70	0.784	21.5°C
Back Side	20850/2510	20M QPSK 1RB#0	0.541	0.291	-0.040	23.28	23.70	0.596	21.5°C
Back Side	21100/2535	20M QPSK 1RB#0	0.634	0.343	-0.160	23.29	23.70	0.697	21.5°C
50%RB									
Front Side	21100/2535	20M QPSK 50%RB#0	0.503	0.275	0.090	22.30	23.00	0.591	21.5°C
Back Side	21100/2535	20M QPSK 50%RB#0	0.530	0.286	-0.010	22.30	23.00	0.623	21.5°C
100%RB									
Back Side	21100/2535	20M QPSK 100%RB#0	0.522	0.282	-0.190	22.17	23.00	0.632	21.5°C
Tested at the worst position with battery 2#									
Back Side	21350/2560	20M QPSK 1RB#0	0.592	0.307	-0.170	23.45	23.70	0.627	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Back Side	21350/2560	20M QPSK 1RB#0	0.478	0.259	-0.040	23.45	23.70	0.506	21.3°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 2#									
Back Side	21350/2560	20M QPSK 1RB#0	0.774	0.423	0.170	23.45	23.70	0.820	21.3°C

Table 64: Body-Worn SAR test results of LTE Band VII

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
1RB									
Front Side	21350/2560	20M QPSK 1RB#99	0.633	0.333	-0.030	20.27	20.50	0.667	21.5°C
Back Side	21350/2560	20M QPSK 1RB#99	0.746	0.372	-0.010	20.27	20.50	0.787	21.5°C
Left Side	21350/2560	20M QPSK 1RB#99	0.183	0.097	0.050	20.27	20.50	0.193	21.5°C
Right Side	21350/2560	20M QPSK 1RB#99	0.105	0.054	0.010	20.27	20.50	0.111	21.5°C
Bottom Side	21350/2560	20M QPSK 1RB#99	0.584	0.285	0.100	20.27	20.50	0.616	21.5°C
50%RB									
Front Side	21100/2535	20M QPSK 50RB#0	0.549	0.297	-0.180	20.21	20.50	0.587	21.5°C
Back Side	21100/2535	20M QPSK 50RB#0	0.517	0.268	0.170	20.21	20.50	0.553	21.5°C
Left Side	21100/2535	20M QPSK 50RB#0	0.296	0.157	0.010	20.21	20.50	0.316	21.5°C
Right Side	21100/2535	20M QPSK 50RB#0	0.139	0.077	0.190	20.21	20.50	0.149	21.5°C
Bottom Side	21100/2535	20M QPSK 50RB#0	0.594	0.284	0.160	20.21	20.50	0.635	21.5°C
Tested at the worst position with battery 2#									
Back Side	21350/2560	20M QPSK 1RB#99	0.474	0.231	-0.100	20.27	20.50	0.500	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Back Side	21350/2560	20M QPSK 1RB#99	0.449	0.223	-0.020	20.27	20.50	0.473	21.3°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 2#									
Back Side	21350/2560	20M QPSK 1RB#99	0.688	0.345	0.030	20.27	20.50	0.725	21.3°C

Table 65: Hotspot SAR test results of LTE Band VII

Per KDB648474D04, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conduct Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	10-g Extremity SAR
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
1RB									
Front Side	21350/2560	20M QPSK 1RB#99	0.633	0.333	-0.030	20.27	23.70	1.394	Yes
Back Side	21350/2560	20M QPSK 1RB#99	0.746	0.372	-0.010	20.27	23.70	1.643	Yes
Left Side	21350/2560	20M QPSK 1RB#99	0.183	0.097	0.050	20.27	23.70	0.403	NO
Right Side	21350/2560	20M QPSK 1RB#99	0.105	0.054	0.010	20.27	23.70	0.231	NO
Bottom Side	21350/2560	20M QPSK 1RB#99	0.584	0.285	0.100	20.27	23.70	1.287	Yes
50%RB									
Front Side	21100/2535	20M QPSK 50RB#0	0.549	0.297	-0.180	20.21	23.00	1.044	NO
Back Side	21100/2535	20M QPSK 50RB#0	0.517	0.268	0.170	20.21	23.00	0.983	NO
Left Side	21100/2535	20M QPSK 50RB#0	0.296	0.157	0.010	20.21	23.00	0.563	NO
Right Side	21100/2535	20M QPSK 50RB#0	0.139	0.077	0.190	20.21	23.00	0.264	NO
Bottom Side	21100/2535	20M QPSK 50RB#0	0.594	0.284	0.160	20.21	23.00	1.129	NO
Tested at the worst position with battery 2#									
Back Side	21350/2560	20M QPSK 1RB#99	0.474	0.231	-0.100	20.27	23.70	1.044	NO

Table 66: 10-g Extremity SAR test reduction evaluation of LTE Band VII

Note : According to the table above , 10-g Extremity SAR test is required for this frequency band.



According to the table above , only **Front Side** and **Back side** and **Bottom side** 10-g Extremity SAR test are required for this frequency band:

Test Position of 10-g Extremity with 0mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled 10-g SAR (W/kg)	Liquid Temp.
			1-g	10-g					
The data of RIO-L01 from report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
1RB									
Front Side	21350/2560	20M QPSK 1RB#0	8.260	2.880	0.160	23.45	23.70	3.051	21.5°C
Front Side	20850/2510	20M QPSK 1RB#0	8.230	2.980	0.140	23.28	23.70	3.283	21.5°C
Front Side	21100/2535	20M QPSK 1RB#0	9.060	3.170	-0.190	23.29	23.70	3.484	21.5°C
Back Side	21350/2560	20M QPSK 1RB#0	8.230	2.980	0.000	23.45	23.70	3.157	21.5°C
Back Side	20850/2510	20M QPSK 1RB#0	8.560	3.080	0.040	23.28	23.70	3.393	21.5°C
Back Side	21100/2535	20M QPSK 1RB#0	8.140	2.950	0.190	23.29	23.70	3.242	21.5°C
Bottom Side	21350/2560	20M QPSK 1RB#0	2.750	1.060	-0.120	23.45	23.70	1.123	21.5°C
50%RB									
Front Side	21100/2535	20M QPSK 50%RB#0	7.280	2.520	0.000	22.30	23.00	2.961	21.5°C
Front Side	20850/2510	20M QPSK 50%RB#0	7.120	2.500	0.150	22.07	23.00	3.097	21.5°C
Front Side	21350/2560	20M QPSK 50%RB#50	6.480	2.250	0.110	22.26	23.00	2.668	21.5°C
Back Side	21100/2535	20M QPSK 50%RB#0	6.700	2.410	0.000	22.30	23.00	2.832	21.5°C
Back Side	20850/2510	20M QPSK 50%RB#0	6.900	2.470	0.000	22.07	23.00	3.060	21.5°C
Back Side	21350/2560	20M QPSK 50%RB#50	5.430	2.350	0.000	22.26	23.00	2.787	21.5°C
Bottom Side	21100/2535	20M QPSK 50%RB#0	1.960	0.935	0.190	22.30	23.00	1.099	21.5°C
100%RB									
Front Side	21100/2535	20M QPSK 100%RB#0	6.820	2.360	0.000	22.17	23.00	2.857	21.5°C
Back Side	21100/2535	20M QPSK 100%RB#0	5.970	2.160	-0.170	22.17	23.00	2.615	21.5°C
Tested at the worst position with battery 2#									
Front Side	21100/2535	20M QPSK 1RB#0	6.690	2.450	0.170	23.29	23.70	2.693	21.5°C
Back Side	20850/2510	20M QPSK 1RB#0	9.250	3.250	0.050	23.28	23.70	3.580	21.5°C
Back Side-repeated	20850/2510	20M QPSK 1RB#0	8.560	3.080	0.040	23.28	23.70	3.393	21.5°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Back Side	20850/2510	20M QPSK 1RB#0	8.460	2.920	0.080	23.28	23.00	2.738	21.3°C



RIO-L02 Tested at the worst position of RIO-L01 with battery 2#

Back Side	20850/2510	20M QPSK 1RB#0	8.710	3.010	0.130	23.28	23.70	3.316	21.3°C
-----------	------------	-------------------	-------	-------	-------	-------	-------	-------	--------

Table 67: 10-g Extremity SAR test results of LTE Band VII

7.2.12 SAR measurement Result of LTE Band XXXVIII(Main Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	38000/2595	20M QPSK 1RB#50	0.048	0.025	0.140	21.89	22.50	0.055	21.8°C
Left Hand Tilted 15°	38000/2595	20M QPSK 1RB#50	0.019	0.008	-0.040	21.89	22.50	0.022	21.8°C
Right Hand Touched	38000/2595	20M QPSK 1RB#50	0.033	0.014	-0.070	21.89	22.50	0.037	21.8°C
Right Hand Tilted 15°	38000/2595	20M QPSK 1RB#50	0.020	0.010	-0.040	21.89	22.50	0.022	21.8°C
Left Hand Touched	37850/2580	20M QPSK 1RB#50	0.042	0.024	0.100	21.87	22.50	0.049	21.8°C
Left Hand Touched	38150/2610	20M QPSK 1RB#50	0.021	0.008	0.150	21.86	22.50	0.024	21.8°C
50%RB									
Left Hand Touched	38000/2595	20M QPSK 50%RB#0	0.041	0.021	0.100	20.87	21.50	0.048	21.8°C
Left Hand Tilted 15°	38000/2595	20M QPSK 50%RB#0	0.017	0.008	0.190	20.87	21.50	0.019	21.8°C
Right Hand Touched	38000/2595	20M QPSK 50%RB#0	0.033	0.017	0.180	20.87	21.50	0.038	21.8°C
Right Hand Tilted 15°	38000/2595	20M QPSK 50%RB#0	0.016	0.008	0.100	20.87	21.50	0.018	21.8°C
Tested at the worst position with battery 2#									
Left Hand Touched	38000/2595	20M QPSK 1RB#50	0.048	0.026	0.120	21.89	22.50	0.055	21.8°C

Table 68: Head SAR test results of LTE Band XXXVIII

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	38000/2595	20M QPSK 1RB#50	0.250	0.139	0.050	21.89	22.50	0.288	21.3°C
Back Side	38000/2595	20M QPSK 1RB#50	0.273	0.147	-0.040	21.89	22.50	0.314	21.3°C
50%RB									
Front Side	38000/2595	20M QPSK 50%RB#0	0.203	0.112	0.090	20.87	21.50	0.235	21.3°C
Back Side	38000/2595	20M QPSK 50%RB#0	0.210	0.115	-0.090	20.87	21.50	0.243	21.3°C
Tested at the worst position with battery 2#									
Back Side	38000/2595	20M QPSK 1RB#50	0.199	0.105	-0.080	21.89	22.50	0.229	21.3°C

Table 69: Body-Worn SAR test results of LTE Band XXXVIII

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	38000/2595	20M QPSK 1RB#50	0.438	0.233	0.120	21.89	22.50	0.504	21.3°C
Back Side	38000/2595	20M QPSK 1RB#50	0.522	0.275	-0.030	21.89	22.50	0.601	21.3°C
Left Side	38000/2595	20M QPSK 1RB#50	0.143	0.076	-0.080	21.89	22.50	0.165	21.3°C
Right Side	38000/2595	20M QPSK 1RB#50	0.084	0.045	0.030	21.89	22.50	0.097	21.3°C
Bottom Side	38000/2595	20M QPSK 1RB#50	0.524	0.261	0.020	21.89	22.50	0.603	21.3°C
50%RB									
Front Side	38000/2595	20M QPSK 50%RB#0	0.355	0.190	0.050	20.87	21.50	0.410	21.3°C
Back Side	38000/2595	20M QPSK 50%RB#0	0.420	0.225	0.060	20.87	21.50	0.486	21.3°C
Left Side	38000/2595	20M QPSK 50%RB#0	0.124	0.066	0.100	20.87	21.50	0.143	21.3°C
Right Side	38000/2595	20M QPSK 50%RB#0	0.065	0.035	0.140	20.87	21.50	0.076	21.3°C
Bottom Side	38000/2595	20M QPSK 50%RB#0	0.409	0.206	-0.050	20.87	21.50	0.473	21.3°C
Tested at the worst position with battery 2#									
Bottom Side	38000/2595	20M QPSK 1RB#50	0.556	0.292	0.070	21.89	22.50	0.640	21.3°C

Table 70: Hotspot SAR test results of LTE Band XXXVIII

Note: Per KDB648474D04, 10-g Extremity SAR was not evaluated for this frequency band since the hotspot 1-g reported SAR < 1.2W/kg.

7.2.13 SAR measurement Result of WiFi 2.4G

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g Area Scan	1-g Zoom Scan					
The data of the RIO-L01 from the report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
Left Hand Touched	6/2437	802.11 b	0.582	0.543	-0.090	17.96	18.00	0.548	21.4°C
Left Hand Tilted 15°	6/2437	802.11 b	0.428	/	-0.180	17.96	18.00	/	21.4°C
Right Hand Touched	6/2437	802.11 b	0.363	/	0.060	17.96	18.00	/	21.4°C
Right Hand Tilted 15°	6/2437	802.11 b	0.469	0.486	0.170	17.96	18.00	0.490	21.4°C
Left Hand Touched	1/2412	802.11 b	0.425	0.410	-0.040	17.44	18.00	0.466	21.4°C
Left Hand Touched	11/2462	802.11 b	1.010	0.940	-0.010	17.02	18.00	1.178	21.4°C
Left Hand Touched-Repeated	11/2462	802.11 b	1.020	0.942	-0.060	17.02	18.00	1.180	21.4°C
Tested at the worst position with battery 2#									
Left Hand Touched	11/2462	802.11 b	0.984	0.917	0.140	17.02	18.00	1.149	21.4°C
Additional SAR test (When Second Antenna and WiFi Antenna Simultaneous Transmission)									
Left Hand Touched	11/2462	802.11 b	0.516	0.487	-0.160	14.35	15.50	0.635	21.4°C
Left Hand Tilted 15°	11/2462	802.11 b	0.416	0.453	0.140	14.35	15.50	0.590	21.4°C
Right Hand Touched	11/2462	802.11 b	0.346	0.357	0.030	14.35	15.50	0.465	21.4°C
Right Hand Tilted 15°	11/2462	802.11 b	0.399	0.422	0.040	14.35	15.50	0.547	21.4°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#(Full Power)									
Left Hand Touched	11/2462	802.11 b	0.667	0.643	-0.200	17.02	18.00	0.806	21.2°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 2#(Full Power)									
Left Hand Touched	11/2462	802.11 b	0.995	0.911	-0.100	17.02	18.00	1.142	21.2°C
Additional SAR test (When Second Antenna and WiFi Antenna Simultaneous Transmission)									
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#(Power reduction)									
Left Hand Touched	11/2462	802.11 b	0.356	0.324	0.190	14.35	15.50	0.422	21.2°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 2#(Power reduction)									
Left Hand Touched	11/2462	802.11 b	0.480	0.434	-0.180	14.35	15.50	0.566	21.2°C

Table 71: Head SAR test results of WiFi 2450MHz

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g Area Scan	1-g Zoom Scan					
The data of the RIO-L01 from the report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
Front Side	6/2437	802.11 b	0.092	/	0.050	17.96	18.00	/	21.6°C
Back Side	6/2437	802.11 b	0.095	0.098	0.000	17.96	18.00	0.099	21.6°C
Back Side	1/2412	802.11 b	0.075	0.076	0.170	17.44	18.00	0.087	21.6°C
Back Side	11/2462	802.11 b	0.131	0.133	0.060	17.02	18.00	0.167	21.6°C
Tested at the worst position with battery 2#									
Back Side	11/2462	802.11 b	0.114	0.116	0.060	17.02	18.00	0.145	21.6°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Back Side	11/2462	802.11 b	0.087	0.088	0.100	17.96	18.00	0.089	0.087
RIO-L02 Tested at the worst position of RIO-L01 with battery 2#									
Back Side	11/2462	802.11 b	0.109	0.111	0.130	17.02	18.00	0.139	22.0°C

Table 72: Body-Worn SAR test results of WiFi 2450MHz

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g Area Scan	1-g Zoom Scan					
The data of the RIO-L01 from the report No.: SYBH(Z-SAR)004052015-2									
Test data with battery 1#									
Front Side	6/2437	802.11 b	0.163	/	0.000	17.96	18.00	/	21.6°C
Back Side	6/2437	802.11 b	0.197	0.206	-0.160	17.96	18.00	0.208	21.6°C
Right Side	6/2437	802.11 b	0.120	/	0.180	17.96	18.00	/	21.6°C
Top Side	6/2437	802.11 b	0.300	0.306	0.180	17.96	18.00	0.309	21.6°C
Top Side	1/2412	802.11 b	0.224	0.238	0.030	17.44	18.00	0.271	21.6°C
Top Side	11/2462	802.11 b	0.555	0.595	-0.090	17.02	18.00	0.746	21.6°C
Tested at the worst position with battery 2#									
Top Side	11/2462	802.11 b	0.513	0.519	0.130	17.02	18.00	0.650	21.6°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 1#									
Top Side	11/2462	802.11 b	0.302	0.304	-0.100	17.02	18.00	0.381	22.0°C
RIO-L02 Tested at the worst position of RIO-L01 with battery 2#									
Top Side	11/2462	802.11 b	0.352	0.381	-0.070	17.02	18.00	0.477	22.0°C


Table 73: Hotspot SAR test results of WiFi 2450MHz

Note: Per KDB648474D04, 10-g Extremity SAR was not evaluated for this frequency band since the hotspot 1-g reported SAR < 1.2W/kg.

7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v05r02.

The location of the antennas inside the device is shown as below picture:

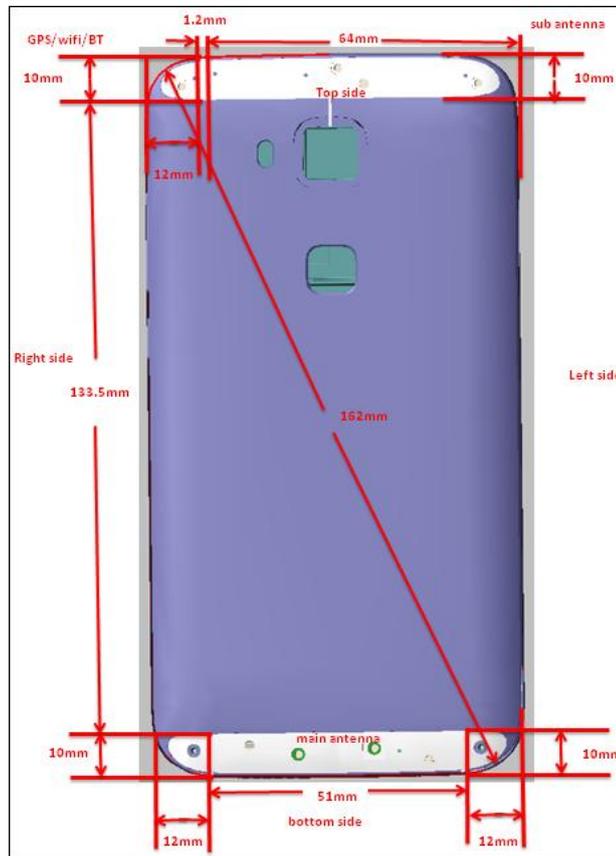

Note:

1) The device supports the dynamic antenna switching function to optimize transmission efficiency for wide range frequency operations. It has two 2G/3G/4G Tx antennas (Main Antenna and Second Antenna). It can transmit from either Main Antenna or Second Antenna. The device is capable of switching between the Main Antenna and Second Antenna based on signal strength. The Main Antenna and Second Antenna can not transmit simultaneously.

2) Per KDB 648474 D04, the diagonal distance of this device is > 160mm, it is considered a “Phablet” device.

3) Per KDB 941225 D06 and KDB 648474 D04, particular DUT edges were not required to be evaluated for Hotspot and/or Extremity SAR if the antenna-to-edge distance is greater than 2.5cm. when hotspot mode applies. 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg;

Mode	Exposure Condition	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
Second Antenna	Hotspot/Extremity*	Yes	Yes	Yes	Yes	Yes	No
Main Antenna	Hotspot/Extremity*	Yes	Yes	Yes	Yes	No	Yes
WiFi 2.4G antenna	Hotspot/Extremity*	Yes	Yes	No	Yes	Yes	No

Table 74: Sides for Hotspot / 10g Extremity SAR testing

7.3.1 Stand-alone SAR test exclusion

Per FCC KDB 447498D01v05, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
BT	Body-Worn	9.00	7.94	15	2.48	0.83	3.00	Yes
BT	10-g Extremity	9.00	7.94	5	2.48	2.50	7.50	Yes

Table 75: Standalone SAR test exclusion for BT

Note:

- 1)* - maximum possible output power declared by manufacturer
- 2) Held to ear configurations are not applicable to Bluetooth for this device.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	X	Estimated SAR (W/Kg)*
BT	Body-worn	9.00	7.94	15	2.48	7.5	0.111
BT	10-g Extremity	9.00	7.94	5	2.48	18.75	0.133

Table 76: Estimated SAR calculation for BT

Note:

- 1) * - maximum possible output power declared by manufacturer
- 2) Held to ear configurations are not applicable to Bluetooth and therefore were not considered for simultaneous transmission.

7.3.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

No.	Simultaneous Tx Combination	Head	Body-worn	Hotspot	10-g extremity
1	GSM Voice(Main Antenna) + BT	N/A	Yes	N/A	Yes
2	GSM DATA(Main Antenna) + BT	N/A	N/A	N/A	Yes
3	GSM Voice(Second Antenna) + BT	N/A	Yes	N/A	Yes
4	GSM DATA (Second Antenna)+ BT	N/A	N/A	N/A	Yes
5	GSM Voice(Main Antenna) + WiFi	Yes	Yes	N/A	Yes
6	GSM DATA(Main Antenna) + WiFi	N/A	N/A	Yes	Yes
7	GSM Voice(Second Antenna) + WiFi	Yes	Yes	N/A	Yes
8	GSM DATA(Second Antenna) + WiFi	N/A	N/A	Yes	Yes
9	UMTS Voice(Main Antenna) + BT	N/A	Yes	N/A	Yes
10	UMTS DATA (Main Antenna) + BT	N/A	Yes	N/A	Yes
11	UMTS Voice(Second Antenna) + BT	N/A	Yes	N/A	Yes
12	UMTS DATA (Second Antenna) + BT	N/A	Yes	N/A	Yes
13	UMTS Voice(Main Antenna) + WiFi	Yes	Yes	N/A	Yes
14	UMTS DATA (Main Antenna) + WiFi	N/A	Yes	Yes	Yes
15	UMTS Voice (Second Antenna) + WiFi	Yes	Yes	N/A	Yes
16	UMTS DATA (Second Antenna)+ WiFi	N/A	Yes	Yes	Yes
17	LTE DATA (Main Antenna) + WiFi	Yes*	Yes*	Yes	Yes*
18	LTE DATA (Main Antenna) + BT	N/A	Yes*	N/A	Yes
19	LTE DATA (Second Antenna) + WiFi	Yes*	Yes*	Yes	Yes
20	LTE DATA (Second Antenna) + BT	N/A	Yes*	N/A	Yes

Table 77: Simultaneous Transmission Possibilities

Note:

- 1) Wi-Fi 2.4G and Bluetooth share the same Tx antenna and can't transmit simultaneously.
- 2) Main antenna and Secondary antenna can't transmit simultaneously. Only one antenna can be used for 2G/4G transmission at a time.
- 3) The device does not support DTM function.
- 4) Held to ear configurations are not applicable to Bluetooth and therefore were not considered for simultaneous transmission.
- 5) * VOIP 3rd party applications may possibly be installed and used by the end user.
- 6) Per KDB648474 D04, simultaneous transmission SAR consideration for 10-g extremity SAR requires consideration only when standalone 10-g SAR is required.

7.3.3 SAR Summation Scenario

The yellow color SAR test data in the following summed SAR tables represent that the additional SAR test results in simultaneous transmission fixed power reduction scenario are used to ensure simultaneous transmission SAR test exclusion (Also see Section 7.3). For the other SAR test data in the summed SAR tables, the more conservative stand-alone SAR test results at the maximum output power level are used.

Test Position		Second antenna SAR _{Max}						WiFi/BT antenna SAR _{Max}		ΣSAR (1.6W/kg Limit for 1g and 4.0W/kg Limit for 10g Extremity)	SPLSR
		GSM850	GSM1900	UMTS Band V	LTE Band V	LTE Band VII	LTE Band XXXVIII	WiFi 2.4G	BT		
Head	Left Hand Touched	0.463	0.674	0.541	0.393	0.717	0.626	0.635	/	1.352	N/A
	Left Hand Tilted 15°	0.379	0.703	0.359	0.324	0.878	0.690	0.590	/	1.468	N/A
	Right Hand Touched	0.378	0.775	0.432	0.376	0.937	0.515	0.465	/	1.402	N/A
	Right Hand Tilted 15°	0.350	0.986	0.432	0.324	0.739	0.521	0.547	/	1.533	N/A
Body-worn 15mm	Front side	0.115	0.070	0.112	0.078	0.101	0.105	0.167	0.111	0.282	N/A
	Back side	0.122	0.124	0.129	0.085	0.098	0.085	0.167	0.111	0.296	N/A
Hotspot 10mm	Front side	0.138	0.137	0.158	0.121	0.184	0.224	0.746	/	0.970	N/A
	Back side	0.174	0.190	0.204	0.138	0.197	0.164	0.208	/	0.412	N/A
	Left side	0.104	0.050	0.125	0.111	0.098	0.108	/	/	0.125	N/A
	Right side	0.027	0.009	0.033	0.028	0.010	0.018	0.746	/	0.779	N/A
	Top side	0.083	0.405	0.135	0.094	0.300	0.274	0.746	/	1.151	N/A
	Bottom side	/	/	/	/	/	/	/	/	0.000	N/A
10-g Extremity 0mm	Front side	/	/	/	/	/	/	/	0.133	0.133	N/A
	Back side	/	/	/	/	/	/	/	0.133	0.133	N/A
	Left side	/	/	/	/	/	/	/	0.133	0.133	N/A
	Right side	/	/	/	/	/	/	/	0.133	0.133	N/A
	Top side	/	/	/	/	/	/	/	0.133	0.133	N/A
	Bottom side	/	/	/	/	/	/	/	0.133	0.133	N/A

Table 78: SAR Simultaneous Tx Combination of Second antenna and WiFi/BT.

Test Position		Main antenna SAR _{Max}						WiFi/BT antenna SAR _{Max}		ΣSAR (1.6W/kg Limit for 1g and 4.0W/kg Limit for 10g Extremity)	SPLSR
		GSM850	GSM1900	UMTS Band V	LTE Band V	LTE Band VII	LTE Band XXXVIII	WiFi 2.4G	BT		
Head	Left Hand Touched	0.222	0.162	0.221	0.165	0.140	0.055	0.635	/	0.857	N/A
	Left Hand Tilted 15°	0.143	0.060	0.118	0.095	0.101	0.022	0.590	/	0.733	N/A
	Right Hand Touched	0.295	0.071	0.289	0.242	0.171	0.038	0.465	/	0.760	N/A
	Right Hand Tilted 15°	0.158	0.059	0.129	0.081	0.088	0.022	0.547	/	0.705	N/A
Body-worn 15mm	Front side	0.265	0.458	0.263	0.182	0.687	0.288	0.167	0.111	0.854	N/A
	Back side	0.349	0.371	0.350	0.221	0.870	0.314	0.167	0.111	1.037	N/A
Hotspot 10mm	Front side	0.321	0.506	0.287	0.200	0.667	0.504	0.746	/	1.413	N/A
	Back side	0.343	0.544	0.379	0.244	0.787	0.501	0.208	/	0.995	N/A
	Left side	0.412	0.133	0.337	0.176	0.316	0.165	/	/	0.412	N/A
	Right side	0.465	0.061	0.421	0.314	0.149	0.097	0.746	/	1.211	N/A
	Top side	/	/	/	/	/	/	0.746	/	0.746	N/A
	Bottom side	0.116	1.319	0.127	0.087	0.635	0.640	/	/	1.319	N/A
10-g Extremity 0mm	Front side	/	/	/	/	3.484	/	/	0.133	3.617	N/A
	Back side	/	/	/	/	3.580	/	/	0.133	3.713	N/A
	Left side	/	/	/	/	/	/	/	0.133	0.133	N/A
	Right side	/	/	/	/	/	/	/	0.133	0.133	N/A
	Top side	/	/	/	/	/	/	/	0.133	0.133	N/A
	Bottom side	/	2.250	/	/	1.123	/	/	0.133	2.383	N/A

Table 79: SAR Simultaneous Tx Combination of Main antenna and WiFi/BT.



7.3.4 Simultaneous Transmission Conclusion

The above numeral summed SAR results and SPLSR analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01v05r02



Appendix A. System Check Plots
(Pls See Appendix A.)

Appendix B. SAR Measurement Plots
(Pls See Appendix B.)

Appendix C. Calibration Certificate
(Pls See Appendix C.)

Appendix D. Photo documentation
(Pls See Appendix D.)

End