

FCC Test Report


FCC ID: QISRIO-L03

Project No. : 1506C159
Equipment : Smart Phone
Model Name : HUAWEI RIO-L03, RIO-L03
Applicant : HUAWEI Technologies Co., Ltd
Address : Huawei Industrial Base, Bantian Longgang, Shenzhen
518129, P.R China

Date of Receipt : Jun. 16, 2015
Date of Test : Jun. 16, 2015 ~ Jun. 26, 2015
Issued Date : Jun. 29, 2015
Tested by : BTL Inc.

Testing Engineer : 
(Pike Lee)

Technical Manager : 
(Jeff Yang)

Authorized Signatory : 
(Andy Chiu)

B T L I N C .

B1, No. 37, Lane 365, Yang-Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



Testing Laboratory
0659

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	16
4.2.6 TEST RESULTS (30 TO 1000 MHZ)	17
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	17
5 . MEASUREMENT INSTRUMENTS LIST	18
6 . EUT TEST PHOTO	19
ATTACHMENT A - CONDUCTED EMISSION	22
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	49
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	78

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1506C159	Original Issue.	Jun. 29, 2015

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : HUAWEI RIO-L03, RIO-L03
Applicant : HUAWEI Technologies Co., Ltd
Manufacturer : Huawei Industrial Base,Bantian Longgang,Shenzhen 518129, P.R China
Address : HUAWEI Technologies Co., Ltd
Factory : Huawei Industrial Base,Bantian Longgang,Shenzhen 518129, P.R China
Address : HUAWEI Technologies Co., Ltd
Date of Test : Jun. 16, 2015 ~ Jun. 26, 2015
Standard(s) : FCC Part 15, Subpart B: 2014
ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1506C159) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part 15, Subpart B: 2014	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

(1) " N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of B1, No. 37, Lane 365, Yang-Guang St., Nei-Hu District, Taipei City 114, Taiwan.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
C02	CISPR	150 KHz ~ 30MHz	2.59	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)	NOTE
CB08	CISPR	30MHz ~ 200MHz	V	3.22	
		30MHz ~ 200MHz	H	3.55	
		200MHz ~ 1,000MHz	V	3.24	
		200MHz ~ 1,000MHz	H	3.11	
		1,000MHz ~ 18,000MHz	V	4.05	
		1,000MHz ~ 18,000MHz	H	3.97	
		18,000MHz ~ 40,000MHz	V	4.04	
		18,000MHz ~ 40,000MHz	H	4.01	

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	HUAWEI RIO-L03, RIO-L03
Model Difference	Only differ in model name.
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: Huawei Technologies Co., Ltd. Model: HW-050100U01 (US) Model: HW-050100E01 (EU) Model: HW-050100B01 (UK) Model: HW-050100A01 (AU) #2 Supplied from battery. Manufacturer: Huawei Technologies Co., Ltd. Battery Model: HB396481EBC
Power Rating	#1 I/P: ~100-240V 50/60Hz ,0.5A O/P: 5V  1A #2 DC 3.8V 3000mAh
Earphone	#1 Manufacturer: JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD. Model: MEMD1632B580A00 #2 Manufacturer: QUANCHENG ELECTRONIC CO.,LTD Model: 1311-3291-3.5MM-178

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The maximum operating frequency is 4GHz

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.



Pretest Mode	Description
Mode 1	Adapter+camera on+idle+wifi+bt+gps+Earphone
Mode 2	Adapter+Playing+idle+speaker
Mode 3	Adapter+ Traffic (GSM)+ Earphone
Mode 4	Adapter+ Traffic (WCDMA)
Mode 5	Adapter+ Traffic (LTE)
Mode 6	Playing+idle+speaker
Mode 7	USB Copy(EUT with PC) +Earphone+idle

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+camera on+idle+wifi+bt+gps+Earphone
Mode 2	Adapter+Playing+idle+speaker
Mode 3	Adapter+ Traffic (GSM)+ Earphone
Mode 4	Adapter+ Traffic (WCDMA)
Mode 5	Adapter+ Traffic (LTE)
Mode 7	USB Copy(EUT with PC) +Earphone+idle

For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+camera on+idle+wifi+bt+gps+Earphone
Mode 2	Adapter+Playing+idle+speaker
Mode 3	Adapter+ Traffic (GSM)+ Earphone
Mode 4	Adapter+ Traffic (WCDMA)
Mode 5	Adapter+ Traffic (LTE)
Mode 6	Playing+idle+speaker
Mode 7	USB Copy(EUT with PC) +Earphone+idle

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

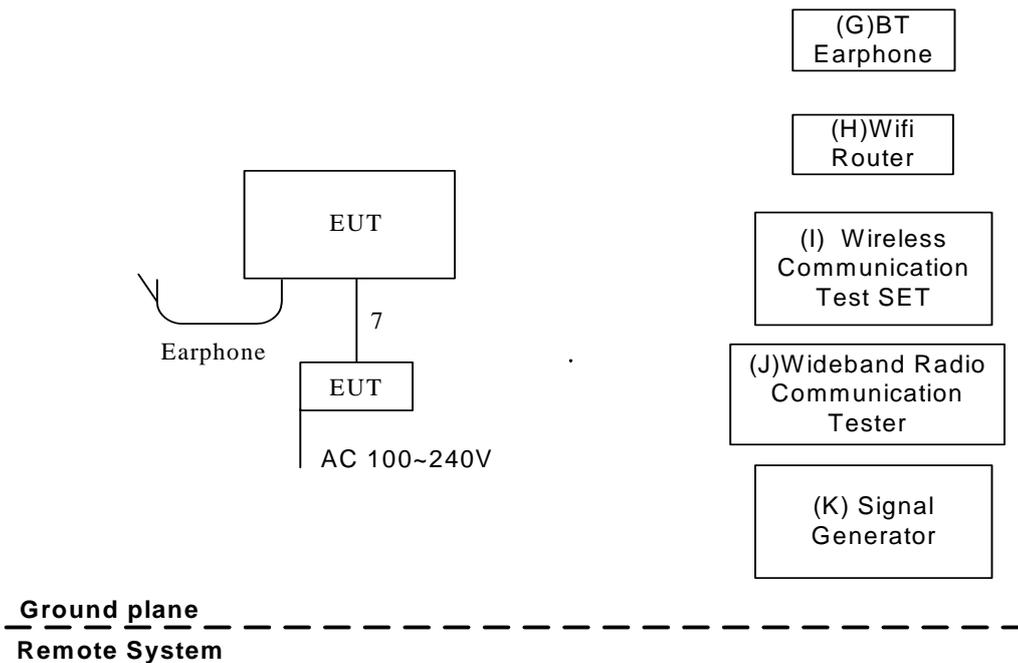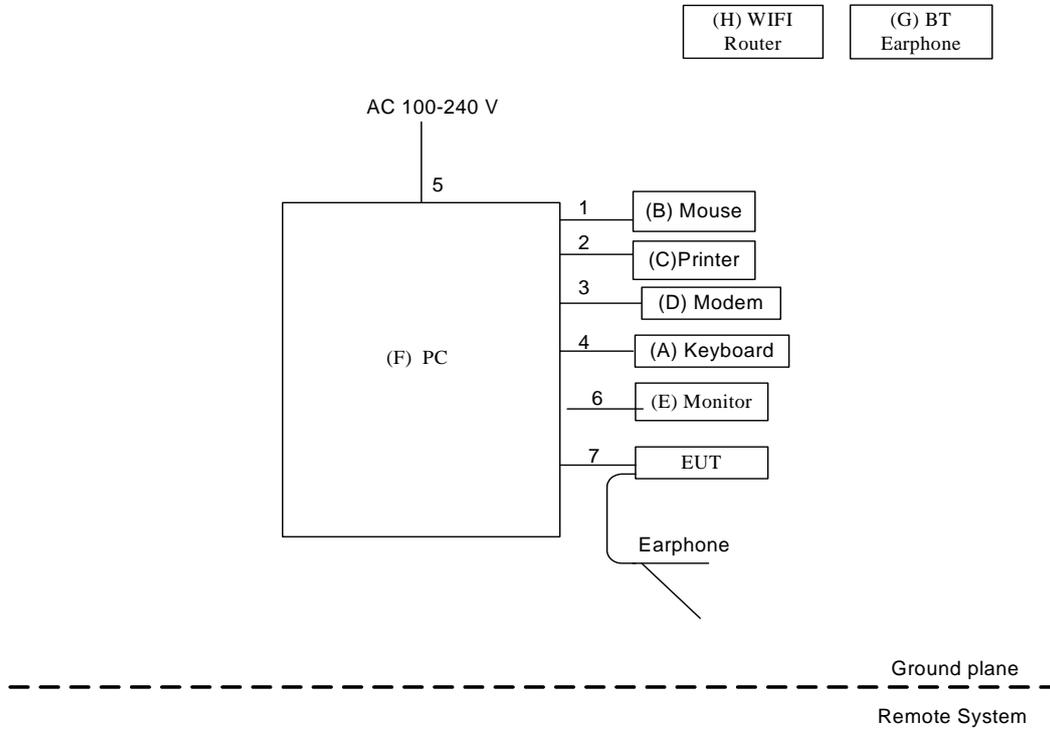

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
A	USB keyboard	hp	SK-2885	DOC	N/A	
B	USB Mouse	hp	SM-2020	DOC	N/A	
C	Printer	SII	DPU-414	DOC	3018507 B	
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131	
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-6418 0-6AG-1WNS	
F	PC	Dell 745	DCSM	DOC	G7K832X	
G	Router	TP-LINK	TL-WR1041N	N/A	N/A	
H	BT Earphone	N/A	N/A	N/A	N/A	
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183	
J	Wideband Radio Communication Tester	RS	CMW500	N/A	122125	
K	SignalGenerator	Agilent	E4438C	N/A	MY49071316	

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1.0m	USB Cable

Note:

(1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

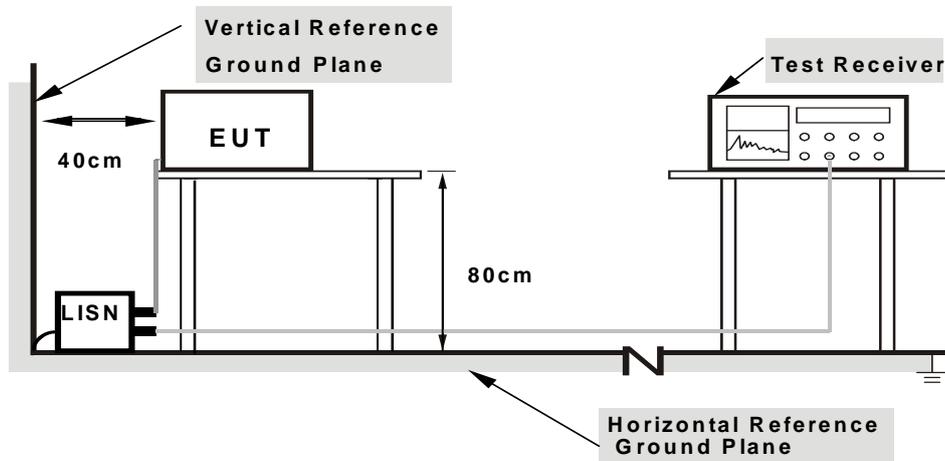

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

5.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 25° C Relative Humidity: 51%

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following: FCC Part 15, Subpart B: 2014;
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

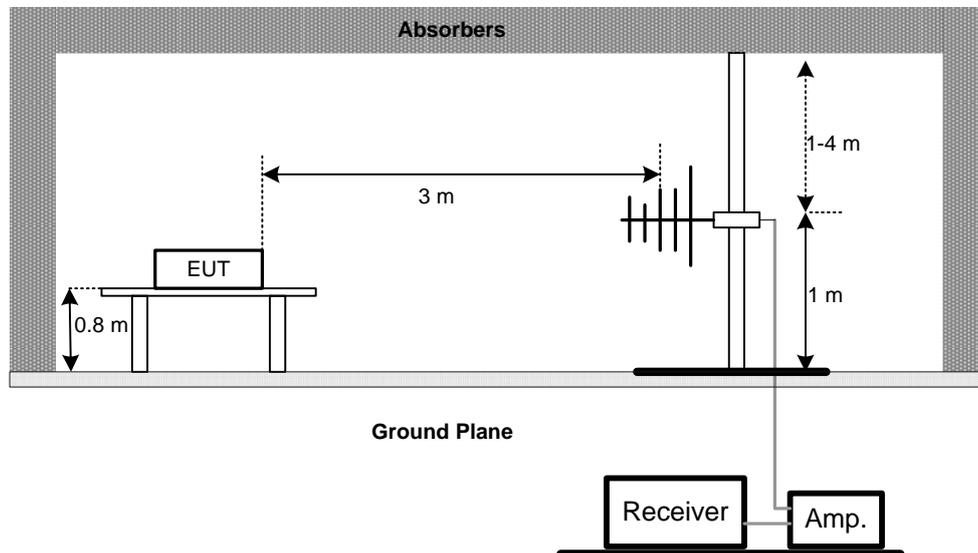

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

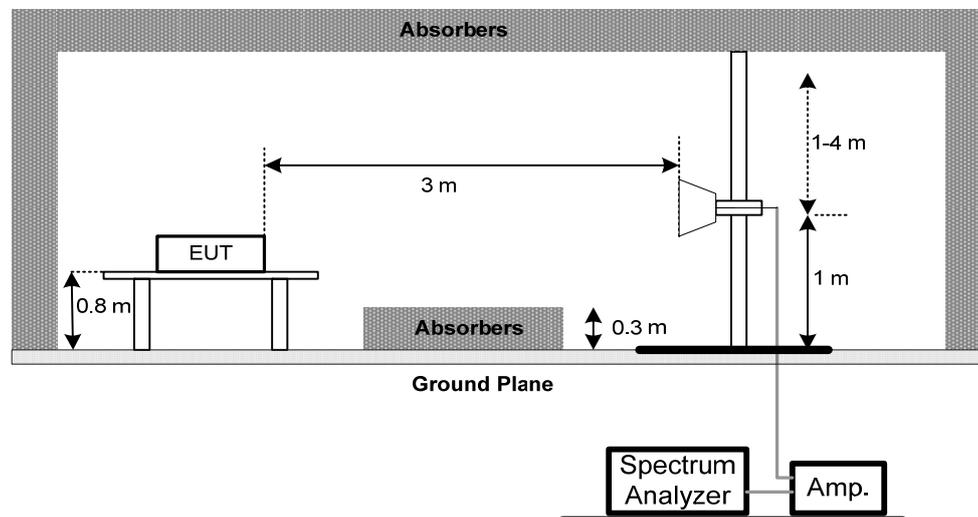

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

5.2.6 TEST RESULTS (30 TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 28°C Relative Humidity: 60%

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

5.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 28°C Relative Humidity: 60%

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100087	Nov. 22, 2015
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A


Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jul. 09, 2015
2	Pre-Amplifier	Anritsu	MH648A	M92649	Apr. 16, 2016
3	Test Cable	TIMES	LMR-400	12M	May 12, 2016
4	Test Cable	TIMES	LMR-400	3M	May 12, 2016
5	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
6	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jan. 11, 2016
7	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 14, 2016
8	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
9	Microflex Cable	AISI	S104-SMAP-1	10M	May 13, 2016
10	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May 11, 2016
11	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 13, 2015
12	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of Equipment List is One Year.

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


Line

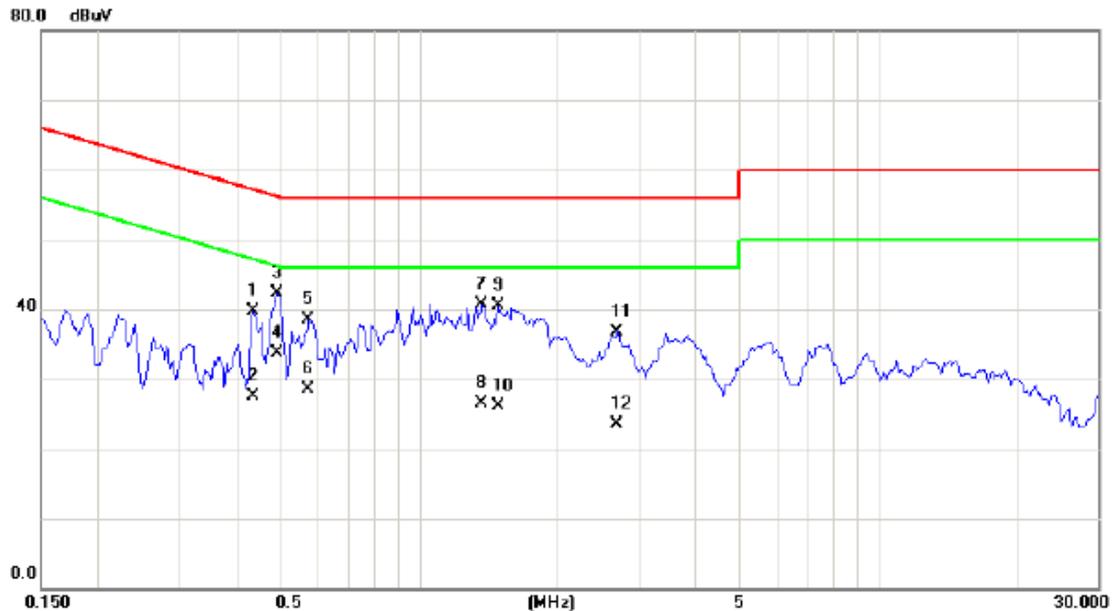

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4352	29.82	9.81	39.63	57.15	-17.52	QP	
2		0.4352	17.60	9.81	27.41	47.15	-19.74	AVG	
3		0.4898	32.40	9.82	42.22	56.17	-13.95	QP	
4	*	0.4898	23.90	9.82	33.72	46.17	-12.45	AVG	
5		0.5757	28.65	9.85	38.50	56.00	-17.50	QP	
6		0.5757	18.60	9.85	28.45	46.00	-17.55	AVG	
7		1.3727	30.71	9.97	40.68	56.00	-15.32	QP	
8		1.3727	16.50	9.97	26.47	46.00	-19.53	AVG	
9		1.4860	30.52	9.93	40.45	56.00	-15.55	QP	
10		1.4860	16.20	9.93	26.13	46.00	-19.87	AVG	
11		2.7047	26.91	9.89	36.80	56.00	-19.20	QP	
12		2.7047	13.70	9.89	23.59	46.00	-22.41	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


Neutral

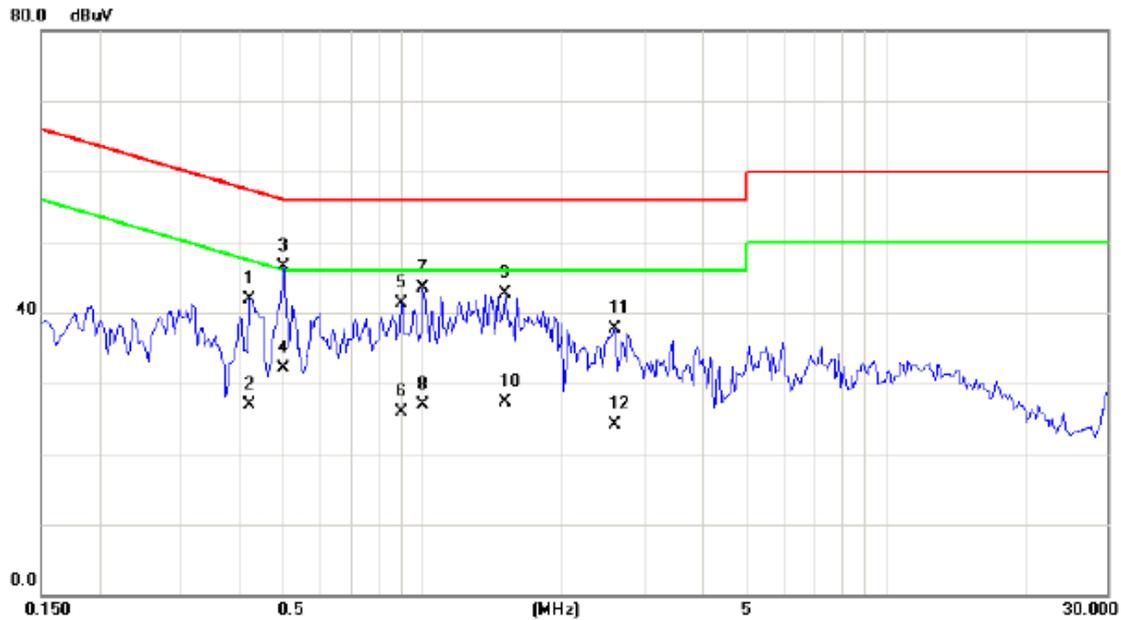

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4234	32.24	9.63	41.87	57.38	-15.51	QP	
2		0.4234	17.30	9.63	26.93	47.38	-20.45	AVG	
3	*	0.5014	36.93	9.65	46.58	56.00	-9.42	QP	
4		0.5014	22.40	9.65	32.05	46.00	-13.95	AVG	
5		0.9040	31.47	9.75	41.22	56.00	-14.78	QP	
6		0.9040	16.10	9.75	25.85	46.00	-20.15	AVG	
7		1.0016	33.70	9.79	43.49	56.00	-12.51	QP	
8		1.0016	17.20	9.79	26.99	46.00	-19.01	AVG	
9		1.5055	32.88	9.82	42.70	56.00	-13.30	QP	
10		1.5055	17.40	9.82	27.22	46.00	-18.78	AVG	
11		2.5992	27.82	9.85	37.67	56.00	-18.33	QP	
12		2.5992	14.20	9.85	24.05	46.00	-21.95	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: BYD


Line

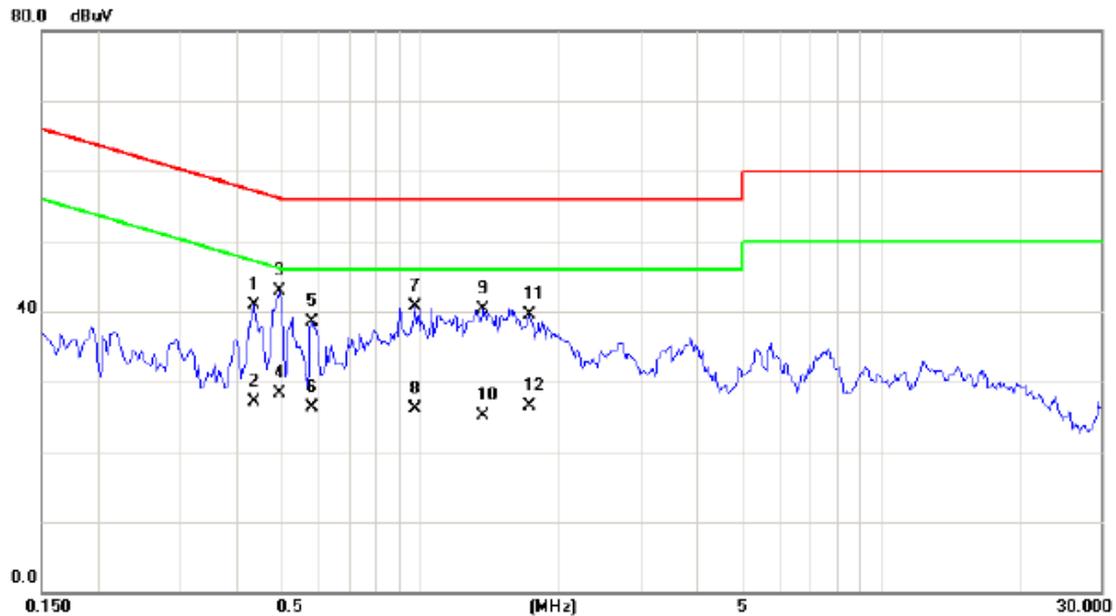

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.4352	31.08	9.81	40.89	57.15	-16.26	QP	
2		0.4352	17.20	9.81	27.01	47.15	-20.14	AVG	
3	*	0.4938	33.06	9.82	42.88	56.10	-13.22	QP	
4		0.4938	18.40	9.82	28.22	46.10	-17.88	AVG	
5		0.5797	28.69	9.85	38.54	56.00	-17.46	QP	
6		0.5797	16.40	9.85	26.25	46.00	-19.75	AVG	
7		0.9703	30.83	9.97	40.80	56.00	-15.20	QP	
8		0.9703	16.10	9.97	26.07	46.00	-19.93	AVG	
9		1.3687	30.35	9.97	40.32	56.00	-15.68	QP	
10		1.3687	15.20	9.97	25.17	46.00	-20.83	AVG	
11		1.7203	29.58	9.89	39.47	56.00	-16.53	QP	
12		1.7203	16.70	9.89	26.59	46.00	-19.41	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: BYD


Neutral

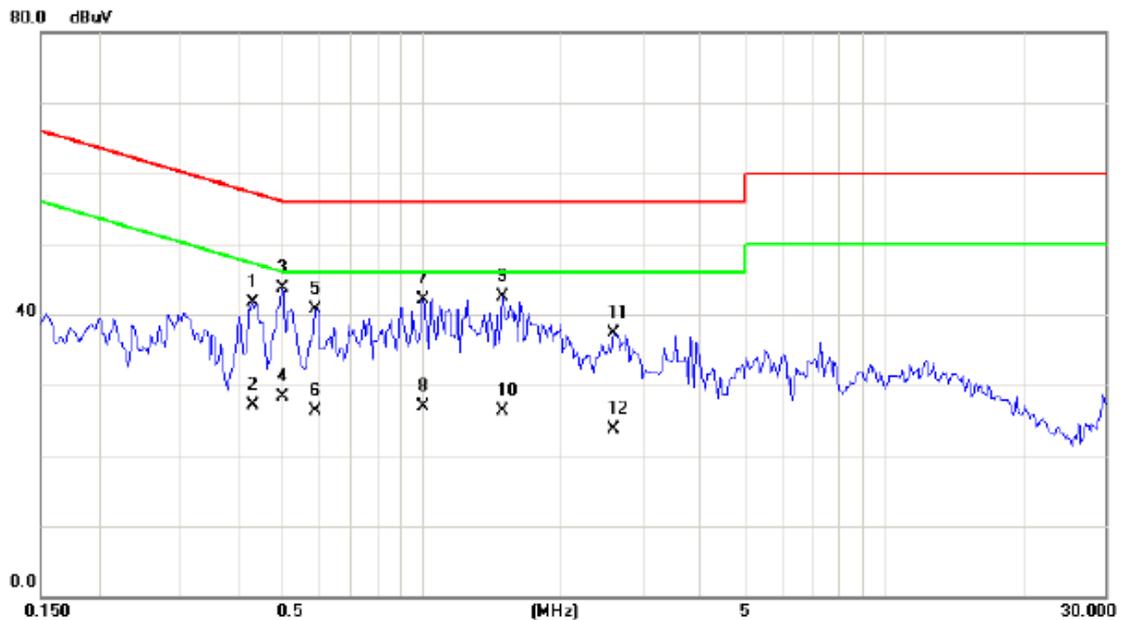

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4312	32.00	9.64	41.64	57.23	-15.59	QP	
2		0.4312	17.50	9.64	27.14	47.23	-20.09	AVG	
3	*	0.5014	34.13	9.65	43.78	56.00	-12.22	QP	
4		0.5014	18.60	9.65	28.25	46.00	-17.75	AVG	
5		0.5914	31.07	9.68	40.75	56.00	-15.25	QP	
6		0.5914	16.70	9.68	26.38	46.00	-19.62	AVG	
7		1.0054	32.38	9.79	42.17	56.00	-13.83	QP	
8		1.0054	17.20	9.79	26.99	46.00	-19.01	AVG	
9		1.5015	32.68	9.82	42.50	56.00	-13.50	QP	
10		1.5015	16.40	9.82	26.22	46.00	-19.78	AVG	
11		2.5992	27.42	9.85	37.27	56.00	-18.73	QP	
12		2.5992	13.80	9.85	23.65	46.00	-22.35	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


Line

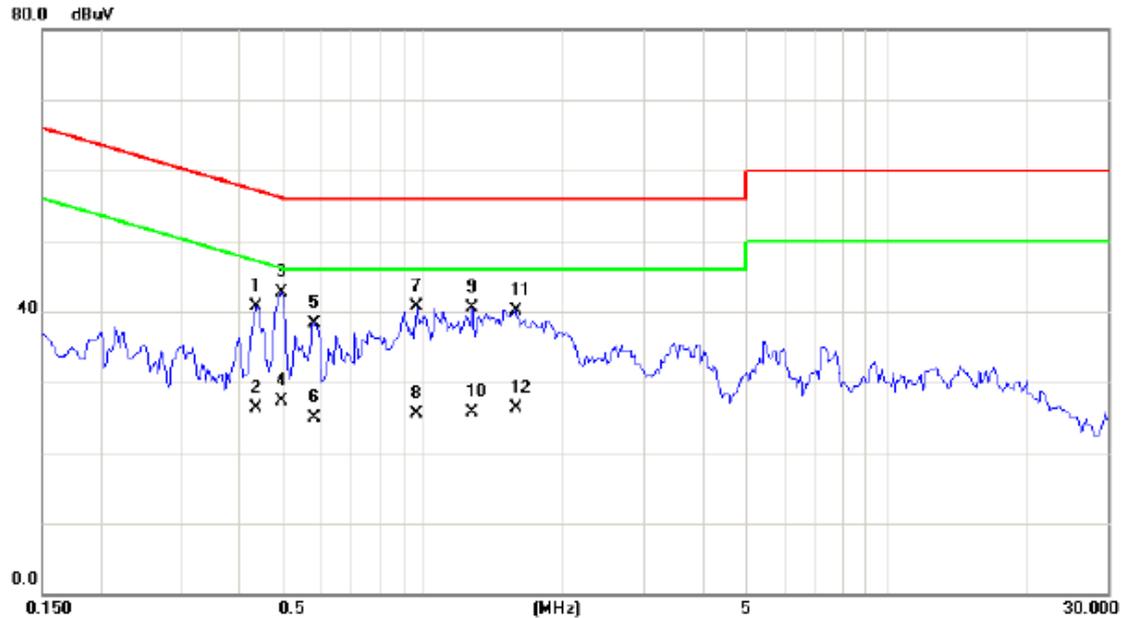

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4351	30.84	9.81	40.65	57.15	-16.50	QP	
2		0.4351	16.40	9.81	26.21	47.15	-20.94	AVG	
3	*	0.4937	32.98	9.82	42.80	56.11	-13.31	QP	
4		0.4937	17.50	9.82	27.32	46.11	-18.79	AVG	
5		0.5796	28.43	9.85	38.28	56.00	-17.72	QP	
6		0.5796	15.10	9.85	24.95	46.00	-21.05	AVG	
7		0.9664	30.69	9.97	40.66	56.00	-15.34	QP	
8		0.9664	15.60	9.97	25.57	46.00	-20.43	AVG	
9		1.2750	30.42	10.00	40.42	56.00	-15.58	QP	
10		1.2750	15.80	10.00	25.80	46.00	-20.20	AVG	
11		1.5835	30.20	9.91	40.11	56.00	-15.89	QP	
12		1.5835	16.40	9.91	26.31	46.00	-19.69	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


Neutral

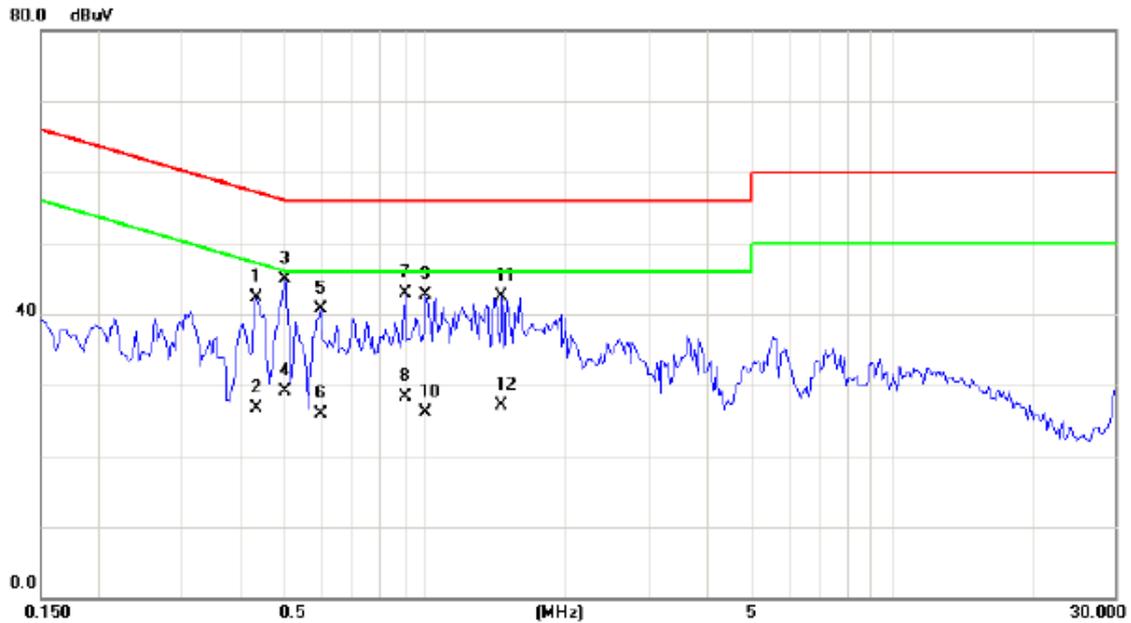

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4352	32.58	9.64	42.22	57.15	-14.93	QP	
2		0.4352	17.10	9.64	26.74	47.15	-20.41	AVG	
3	*	0.5016	35.27	9.65	44.92	56.00	-11.08	QP	
4		0.5016	19.40	9.65	29.05	46.00	-16.95	AVG	
5		0.5953	30.93	9.68	40.61	56.00	-15.39	QP	
6		0.5953	16.20	9.68	25.88	46.00	-20.12	AVG	
7		0.9078	33.13	9.75	42.88	56.00	-13.12	QP	
8		0.9078	18.50	9.75	28.25	46.00	-17.75	AVG	
9		1.0016	32.88	9.79	42.67	56.00	-13.33	QP	
10		1.0016	16.40	9.79	26.19	46.00	-19.81	AVG	
11		1.4586	32.65	9.82	42.47	56.00	-13.53	QP	
12		1.4586	17.30	9.82	27.12	46.00	-18.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


Line

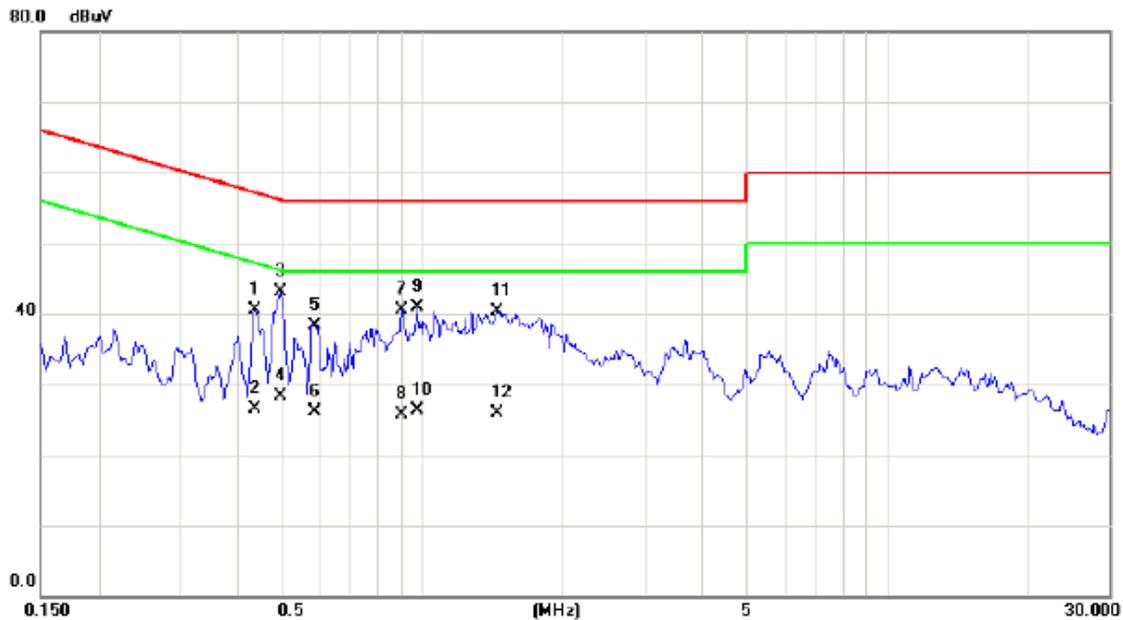

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4352	30.74	9.81	40.55	57.15	-16.60	QP	
2		0.4352	16.70	9.81	26.51	47.15	-20.64	AVG	
3	*	0.4938	33.20	9.82	43.02	56.10	-13.08	QP	
4		0.4938	18.40	9.82	28.22	46.10	-17.88	AVG	
5		0.5836	28.53	9.85	38.38	56.00	-17.62	QP	
6		0.5836	16.30	9.85	26.15	46.00	-19.85	AVG	
7		0.9040	30.51	9.95	40.46	56.00	-15.54	QP	
8		0.9040	15.80	9.95	25.75	46.00	-20.25	AVG	
9		0.9703	30.95	9.97	40.92	56.00	-15.08	QP	
10		0.9703	16.40	9.97	26.37	46.00	-19.63	AVG	
11		1.4470	30.31	9.94	40.25	56.00	-15.75	QP	
12		1.4470	15.90	9.94	25.84	46.00	-20.16	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


Neutral

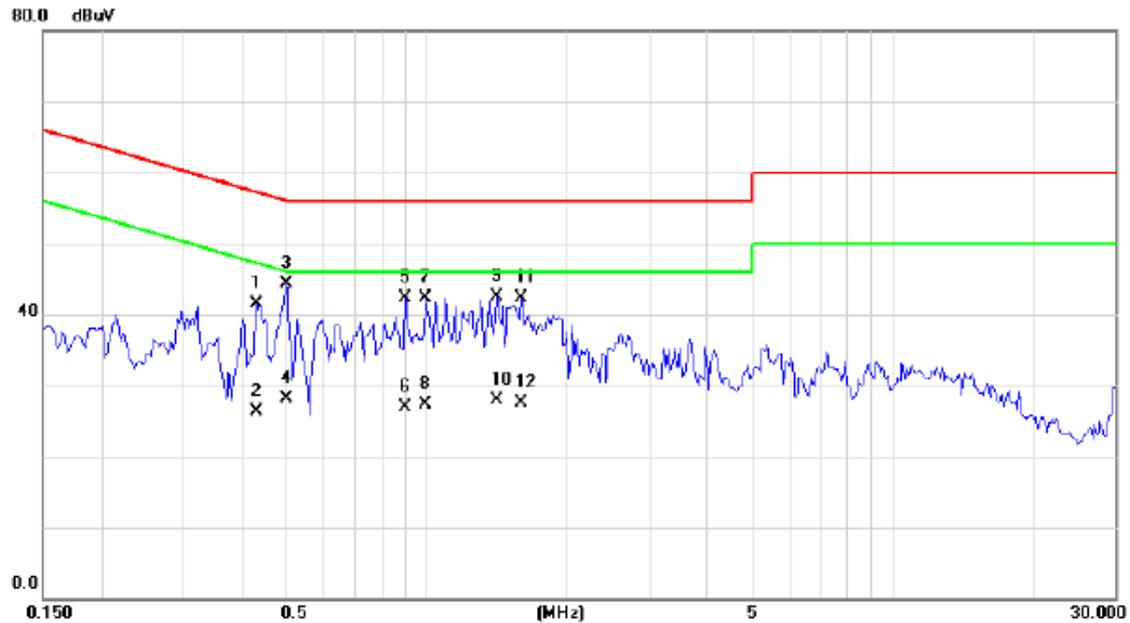

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4312	31.90	9.64	41.54	57.23	-15.69	QP	
2		0.4312	16.70	9.64	26.34	47.23	-20.89	AVG	
3	*	0.5014	34.65	9.65	44.30	56.00	-11.70	QP	
4		0.5014	18.40	9.65	28.05	46.00	-17.95	AVG	
5		0.9040	32.57	9.75	42.32	56.00	-13.68	QP	
6		0.9040	17.20	9.75	26.95	46.00	-19.05	AVG	
7		0.9976	32.61	9.79	42.40	56.00	-13.60	QP	
8		0.9976	17.50	9.79	27.29	46.00	-18.71	AVG	
9		1.4117	32.74	9.82	42.56	56.00	-13.44	QP	
10		1.4117	18.10	9.82	27.92	46.00	-18.08	AVG	
11		1.5992	32.42	9.84	42.26	56.00	-13.74	QP	
12		1.5992	17.60	9.84	27.44	46.00	-18.56	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


Line

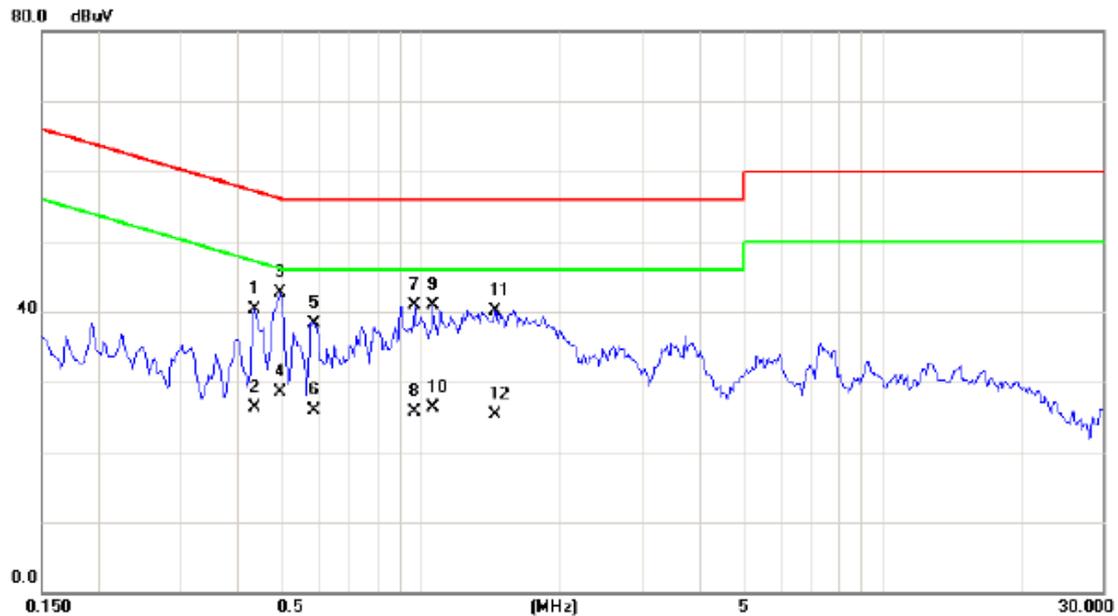

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4352	30.56	9.81	40.37	57.15	-16.78	QP	
2		0.4352	16.40	9.81	26.21	47.15	-20.94	AVG	
3	*	0.4938	32.86	9.82	42.68	56.10	-13.42	QP	
4		0.4938	18.70	9.82	28.52	46.10	-17.58	AVG	
5		0.5875	28.49	9.85	38.34	56.00	-17.66	QP	
6		0.5875	16.10	9.85	25.95	46.00	-20.05	AVG	
7		0.9664	30.85	9.97	40.82	56.00	-15.18	QP	
8		0.9664	15.80	9.97	25.77	46.00	-20.23	AVG	
9		1.0641	30.83	9.99	40.82	56.00	-15.18	QP	
10		1.0641	16.30	9.99	26.29	46.00	-19.71	AVG	
11		1.4470	30.11	9.94	40.05	56.00	-15.95	QP	
12		1.4470	15.40	9.94	25.34	46.00	-20.66	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


Neutral

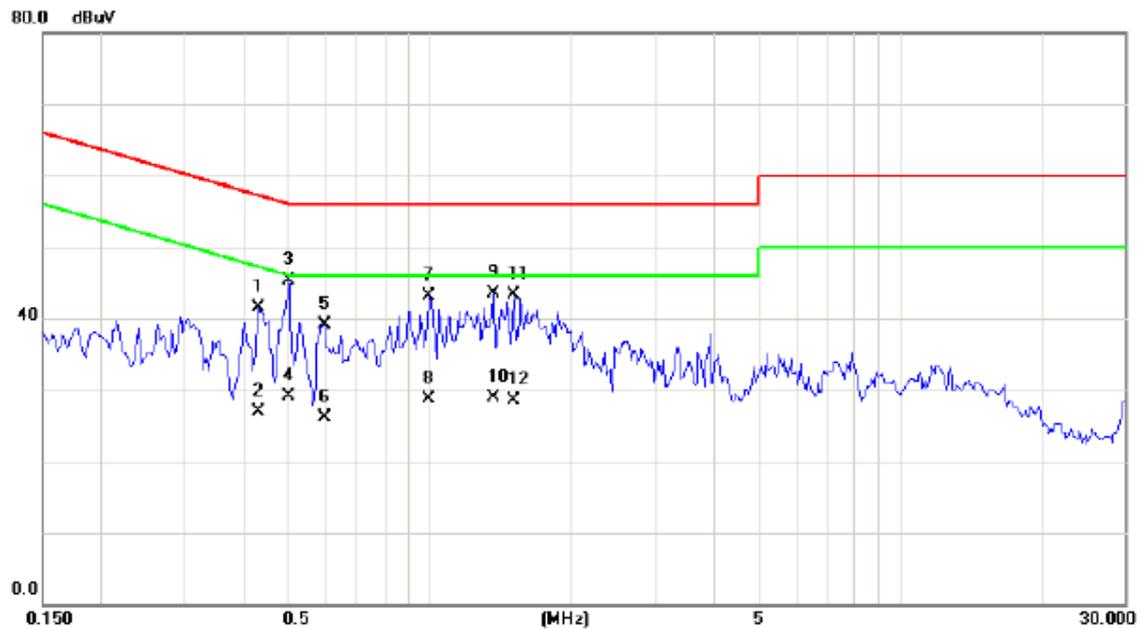

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4313	31.84	9.64	41.48	57.23	-15.75	QP	
2		0.4313	17.30	9.64	26.94	47.23	-20.29	AVG	
3	*	0.5016	35.71	9.65	45.36	56.00	-10.64	QP	
4		0.5016	19.50	9.65	29.15	46.00	-16.85	AVG	
5		0.5953	29.39	9.68	39.07	56.00	-16.93	QP	
6		0.5953	16.40	9.68	26.08	46.00	-19.92	AVG	
7		0.9977	33.31	9.79	43.10	56.00	-12.90	QP	
8		0.9977	18.90	9.79	28.69	46.00	-17.31	AVG	
9		1.3648	33.71	9.82	43.53	56.00	-12.47	QP	
10		1.3648	19.10	9.82	28.92	46.00	-17.08	AVG	
11		1.5055	33.48	9.82	43.30	56.00	-12.70	QP	
12		1.5055	18.60	9.82	28.42	46.00	-17.58	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Line

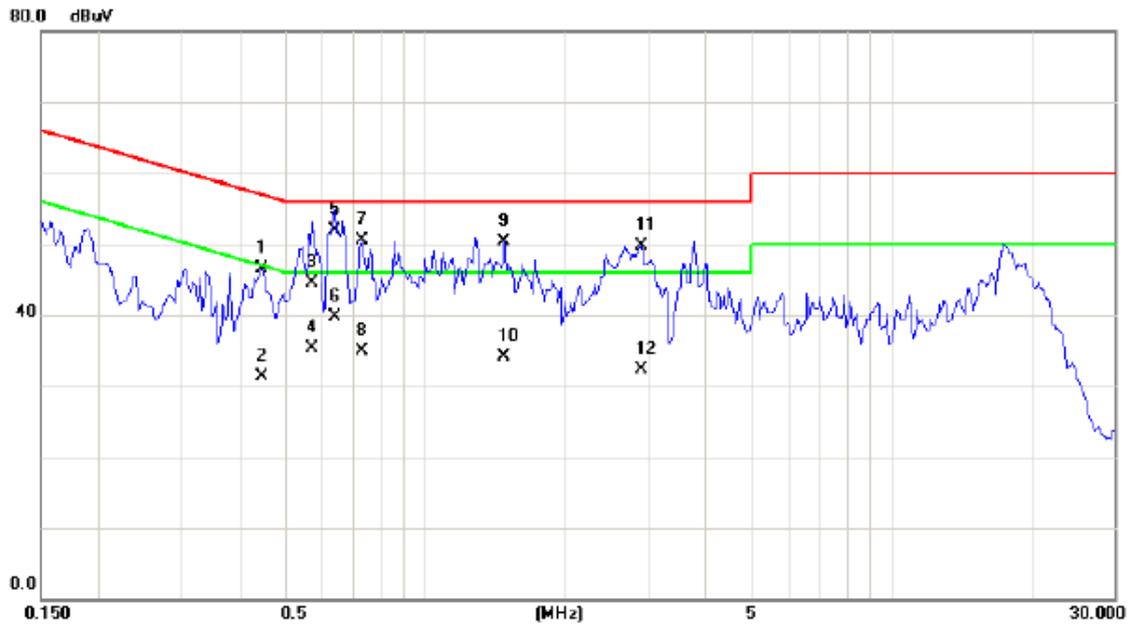

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4470	36.64	9.81	46.45	56.93	-10.48	QP	
2	0.4470	21.40	9.81	31.21	46.93	-15.72	AVG	
3	0.5720	34.60	9.84	44.44	56.00	-11.56	QP	
4	0.5720	25.50	9.84	35.34	46.00	-10.66	AVG	
5 *	0.6422	42.10	9.87	51.97	56.00	-4.03	QP	
6	0.6422	29.90	9.87	39.77	46.00	-6.23	AVG	
7	0.7320	40.55	9.91	50.46	56.00	-5.54	QP	
8	0.7320	24.90	9.91	34.81	46.00	-11.19	AVG	
9	1.4781	40.37	9.93	50.30	56.00	-5.70	QP	
10	1.4781	24.10	9.93	34.03	46.00	-11.97	AVG	
11	2.9078	39.95	9.84	49.79	56.00	-6.21	QP	
12	2.9078	22.50	9.84	32.34	46.00	-13.66	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Neutral

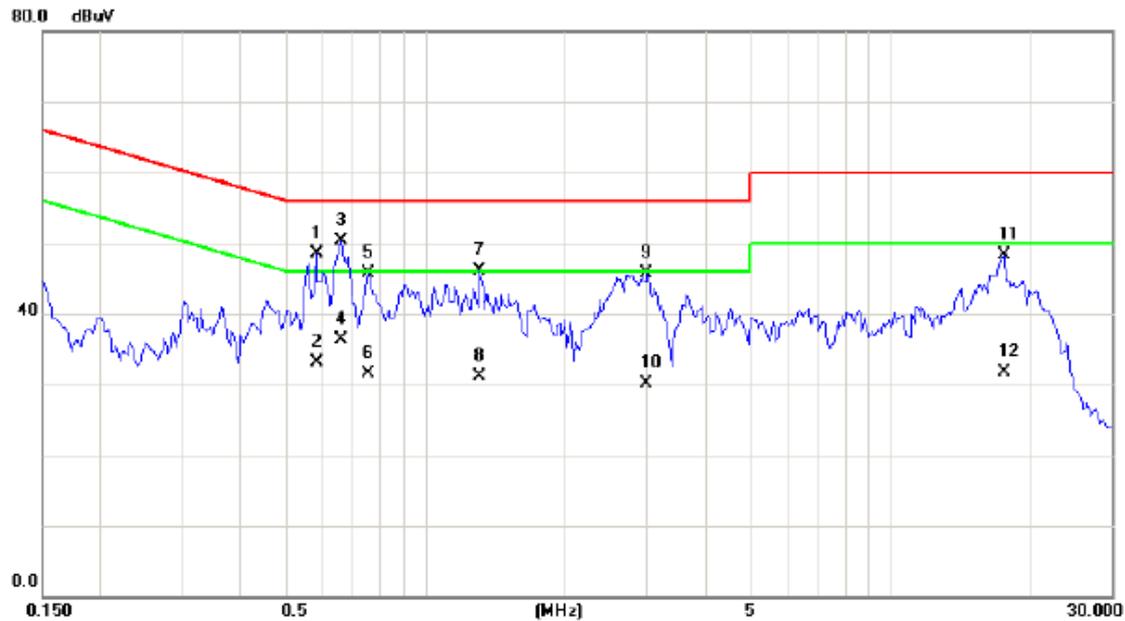

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5836	38.82	9.67	48.49	56.00	-7.51	QP	
2		0.5836	23.40	9.67	33.07	46.00	-12.93	AVG	
3	*	0.6578	40.56	9.69	50.25	56.00	-5.75	QP	
4		0.6578	26.70	9.69	36.39	46.00	-9.61	AVG	
5		0.7555	36.07	9.71	45.78	56.00	-10.22	QP	
6		0.7555	21.80	9.71	31.51	46.00	-14.49	AVG	
7		1.3141	36.27	9.81	46.08	56.00	-9.92	QP	
8		1.3141	21.20	9.81	31.01	46.00	-14.99	AVG	
9		3.0040	35.89	9.80	45.69	56.00	-10.31	QP	
10		3.0040	20.30	9.80	30.10	46.00	-15.90	AVG	
11		17.6445	37.97	10.28	48.25	60.00	-11.75	QP	
12		17.6445	21.40	10.28	31.68	50.00	-18.32	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Line

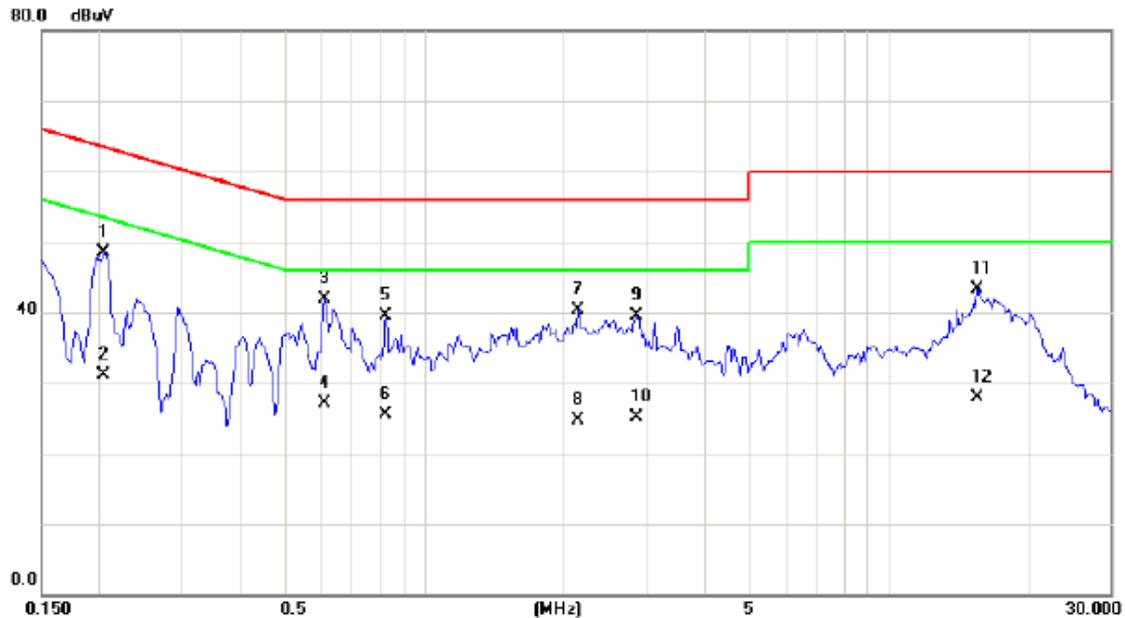

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2047	38.87	9.71	48.58	63.42	-14.84	QP	
2		0.2047	21.30	9.71	31.01	53.42	-22.41	AVG	
3	*	0.6110	31.96	9.86	41.82	56.00	-14.18	QP	
4		0.6110	17.30	9.86	27.16	46.00	-18.84	AVG	
5		0.8297	29.56	9.94	39.50	56.00	-16.50	QP	
6		0.8297	15.60	9.94	25.54	46.00	-20.46	AVG	
7		2.1500	30.48	9.89	40.37	56.00	-15.63	QP	
8		2.1500	14.90	9.89	24.79	46.00	-21.21	AVG	
9		2.8648	29.62	9.85	39.47	56.00	-16.53	QP	
10		2.8648	15.30	9.85	25.15	46.00	-20.85	AVG	
11		15.5352	32.99	10.29	43.28	60.00	-16.72	QP	
12		15.5352	17.60	10.29	27.89	50.00	-22.11	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Neutral

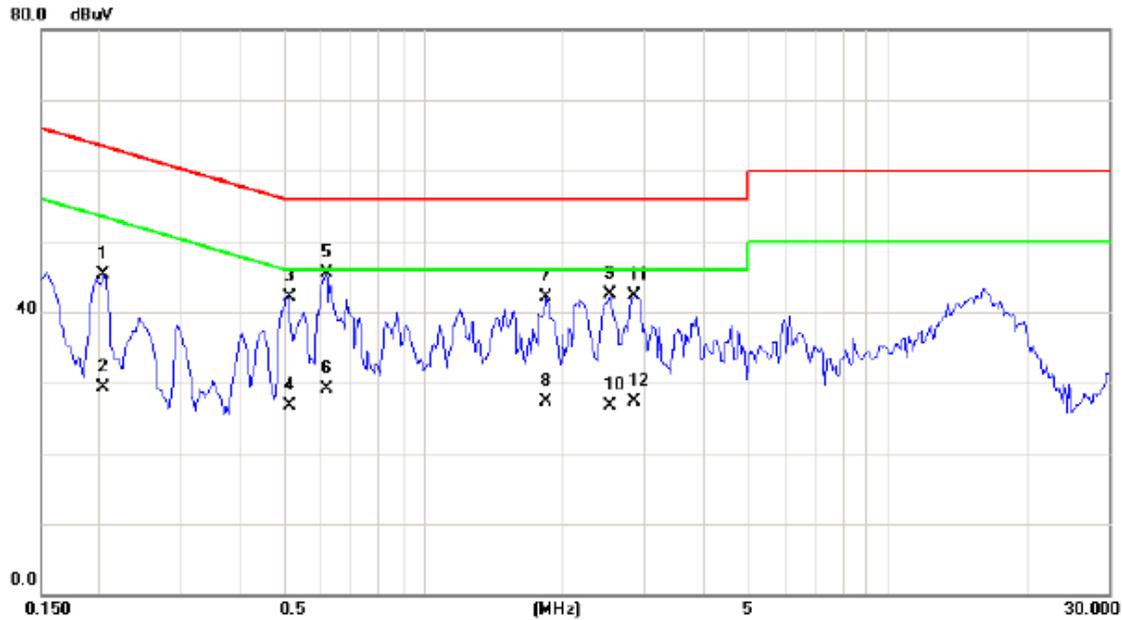

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.2047	35.76	9.61	45.37	63.42	-18.05	QP	
2	0.2047	19.60	9.61	29.21	53.42	-24.21	AVG	
3	0.5132	32.37	9.65	42.02	56.00	-13.98	QP	
4	0.5132	17.10	9.65	26.75	46.00	-19.25	AVG	
5 *	0.6188	35.80	9.68	45.48	56.00	-10.52	QP	
6	0.6188	19.40	9.68	29.08	46.00	-16.92	AVG	
7	1.8414	32.21	9.90	42.11	56.00	-13.89	QP	
8	1.8414	17.40	9.90	27.30	46.00	-18.70	AVG	
9	2.5250	32.65	9.86	42.51	56.00	-13.49	QP	
10	2.5250	16.80	9.86	26.66	46.00	-19.34	AVG	
11	2.8531	32.48	9.82	42.30	56.00	-13.70	QP	
12	2.8531	17.50	9.82	27.32	46.00	-18.68	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


Line

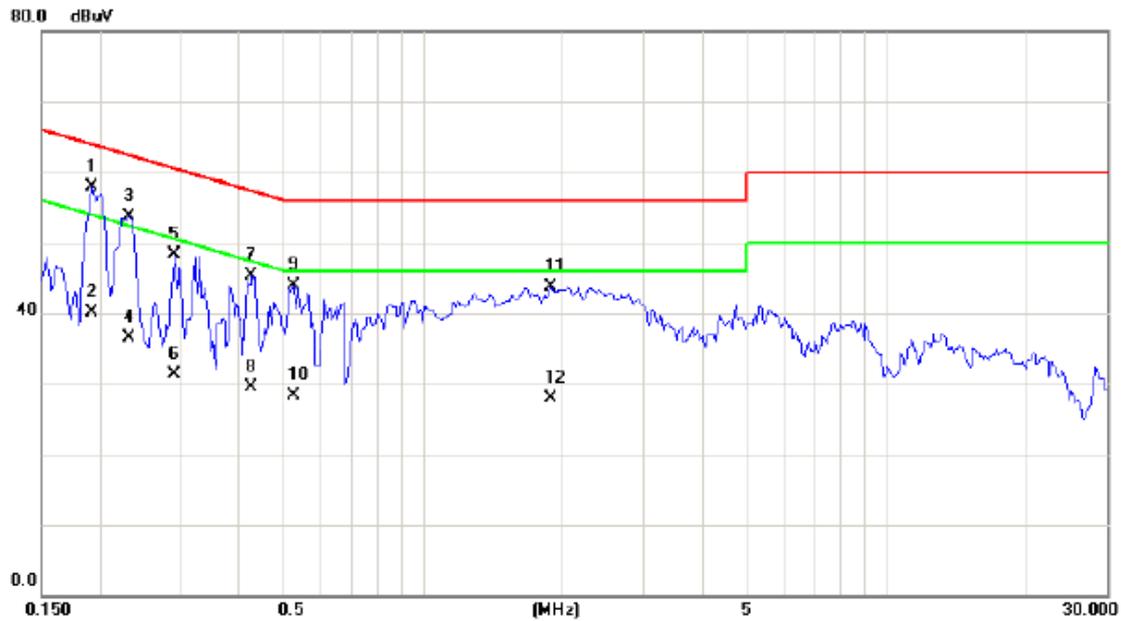

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1930	48.12	9.71	57.83	63.91	-6.08	QP	
2		0.1930	30.40	9.71	40.11	53.91	-13.80	AVG	
3		0.2320	43.89	9.72	53.61	62.38	-8.77	QP	
4		0.2320	26.80	9.72	36.52	52.38	-15.86	AVG	
5		0.2906	38.59	9.75	48.34	60.51	-12.17	QP	
6		0.2906	21.60	9.75	31.35	50.51	-19.16	AVG	
7		0.4273	35.42	9.81	45.23	57.31	-12.08	QP	
8		0.4273	19.60	9.81	29.41	47.31	-17.90	AVG	
9		0.5250	34.07	9.83	43.90	56.00	-12.10	QP	
10		0.5250	18.40	9.83	28.23	46.00	-17.77	AVG	
11		1.8883	33.84	9.88	43.72	56.00	-12.28	QP	
12		1.8883	18.10	9.88	27.98	46.00	-18.02	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


Neutral

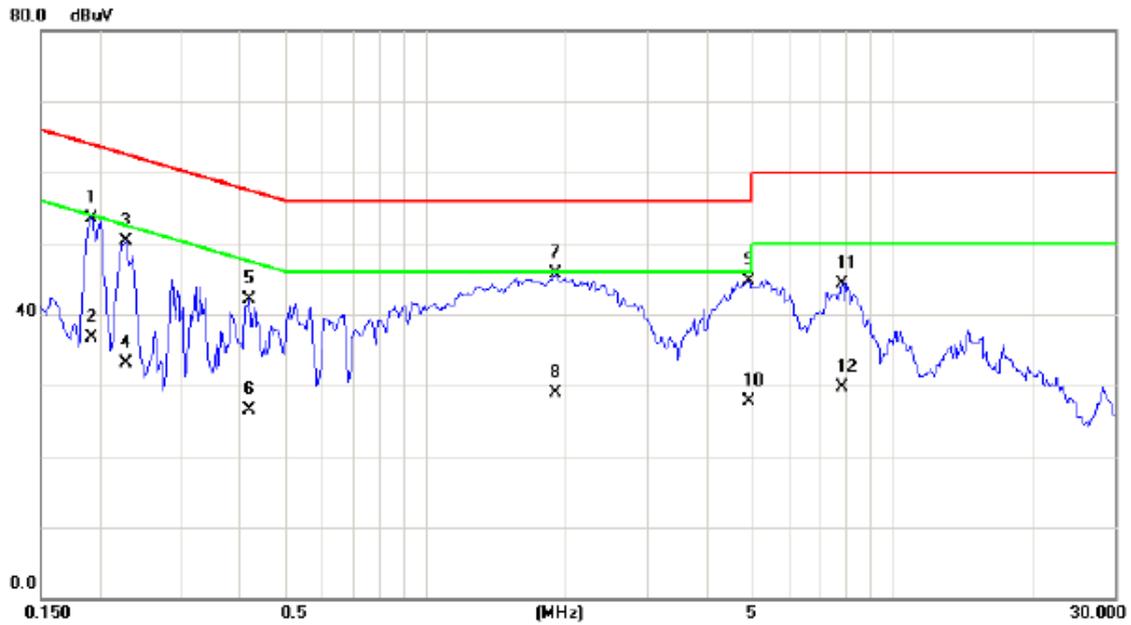

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1930	43.99	9.61	53.60	63.91	-10.31	QP	
2		0.1930	27.10	9.61	36.71	53.91	-17.20	AVG	
3		0.2281	40.68	9.62	50.30	62.52	-12.22	QP	
4		0.2281	23.40	9.62	33.02	52.52	-19.50	AVG	
5		0.4195	32.52	9.63	42.15	57.46	-15.31	QP	
6		0.4195	16.80	9.63	26.43	47.46	-21.03	AVG	
7		1.9000	35.72	9.91	45.63	56.00	-10.37	QP	
8		1.9000	18.90	9.91	28.81	46.00	-17.19	AVG	
9		4.9258	34.54	10.09	44.63	56.00	-11.37	QP	
10		4.9258	17.70	10.09	27.79	46.00	-18.21	AVG	
11		7.8320	34.20	10.12	44.32	60.00	-15.68	QP	
12		7.8320	19.50	10.12	29.62	50.00	-20.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug)


Line

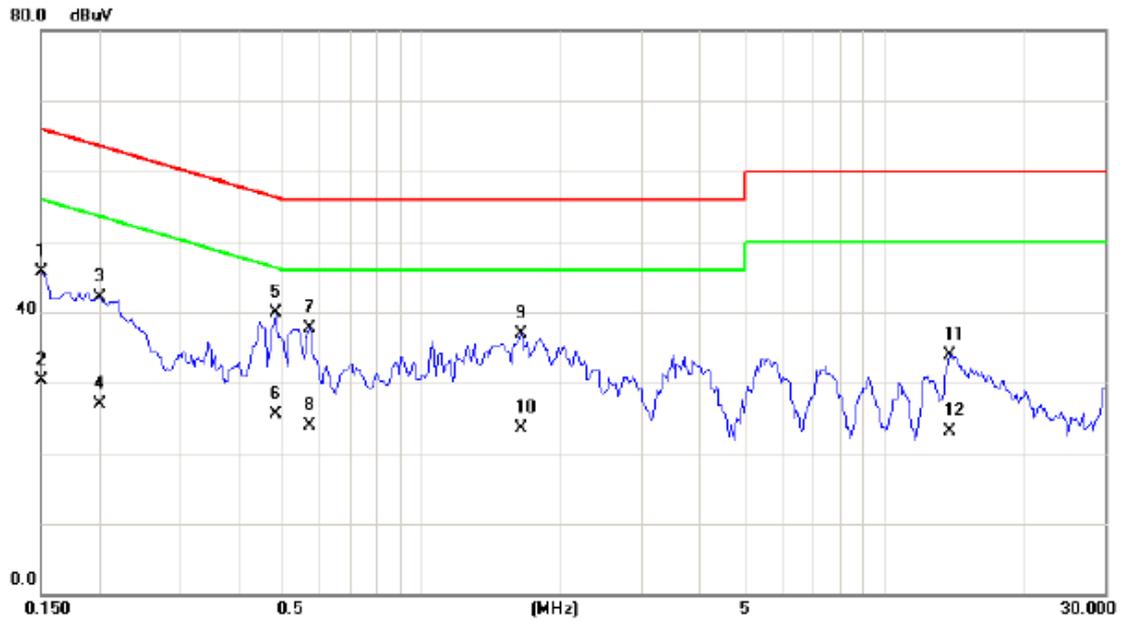

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	36.08	9.68	45.76	66.00	-20.24	QP	
2		0.1500	20.70	9.68	30.38	56.00	-25.62	AVG	
3		0.2008	32.34	9.71	42.05	63.58	-21.53	QP	
4		0.2008	17.10	9.71	26.81	53.58	-26.77	AVG	
5	*	0.4820	30.18	9.82	40.00	56.30	-16.30	QP	
6		0.4820	15.70	9.82	25.52	46.30	-20.78	AVG	
7		0.5757	27.90	9.85	37.75	56.00	-18.25	QP	
8		0.5757	14.10	9.85	23.95	46.00	-22.05	AVG	
9		1.6383	27.01	9.90	36.91	56.00	-19.09	QP	
10		1.6383	13.60	9.90	23.50	46.00	-22.50	AVG	
11		13.8945	23.62	10.23	33.85	60.00	-26.15	QP	
12		13.8945	12.90	10.23	23.13	50.00	-26.87	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug)


Neutral

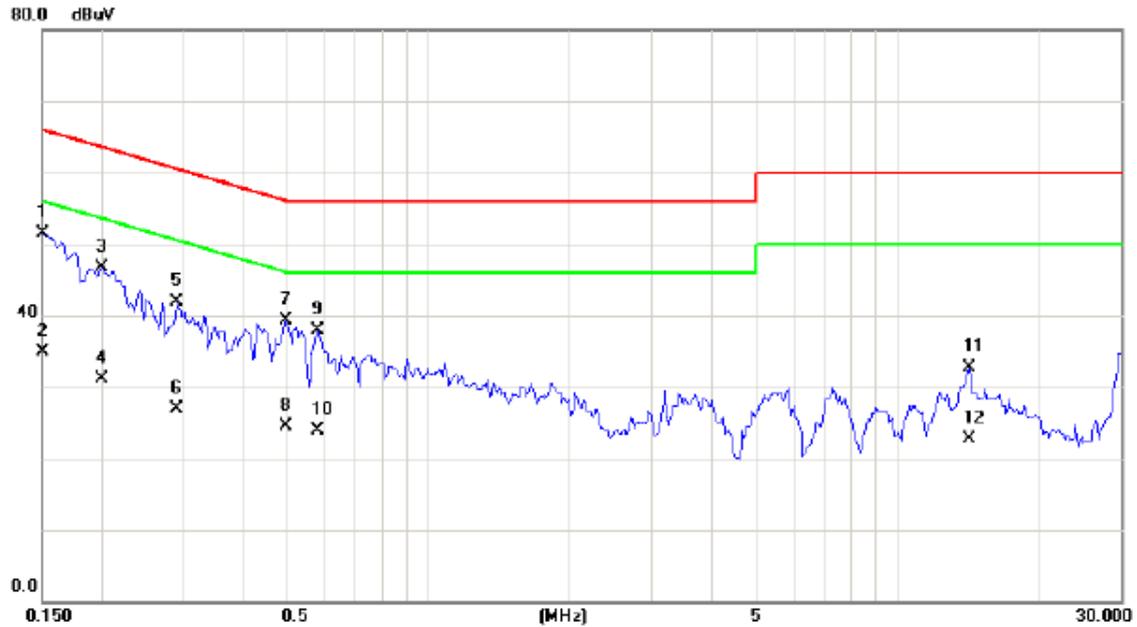

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	41.83	9.60	51.43	66.00	-14.57	QP	
2		0.1500	25.40	9.60	35.00	56.00	-21.00	AVG	
3		0.2008	37.06	9.61	46.67	63.58	-16.91	QP	
4		0.2008	21.40	9.61	31.01	53.58	-22.57	AVG	
5		0.2906	32.20	9.63	41.83	60.51	-18.68	QP	
6		0.2906	17.30	9.63	26.93	50.51	-23.58	AVG	
7		0.4977	29.56	9.65	39.21	56.04	-16.83	QP	
8		0.4977	14.80	9.65	24.45	46.04	-21.59	AVG	
9		0.5797	28.21	9.67	37.88	56.00	-18.12	QP	
10		0.5797	14.30	9.67	23.97	46.00	-22.03	AVG	
11		14.2305	22.56	10.23	32.79	60.00	-27.21	QP	
12		14.2305	12.40	10.23	22.63	50.00	-27.37	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU(EU Plug)


Line

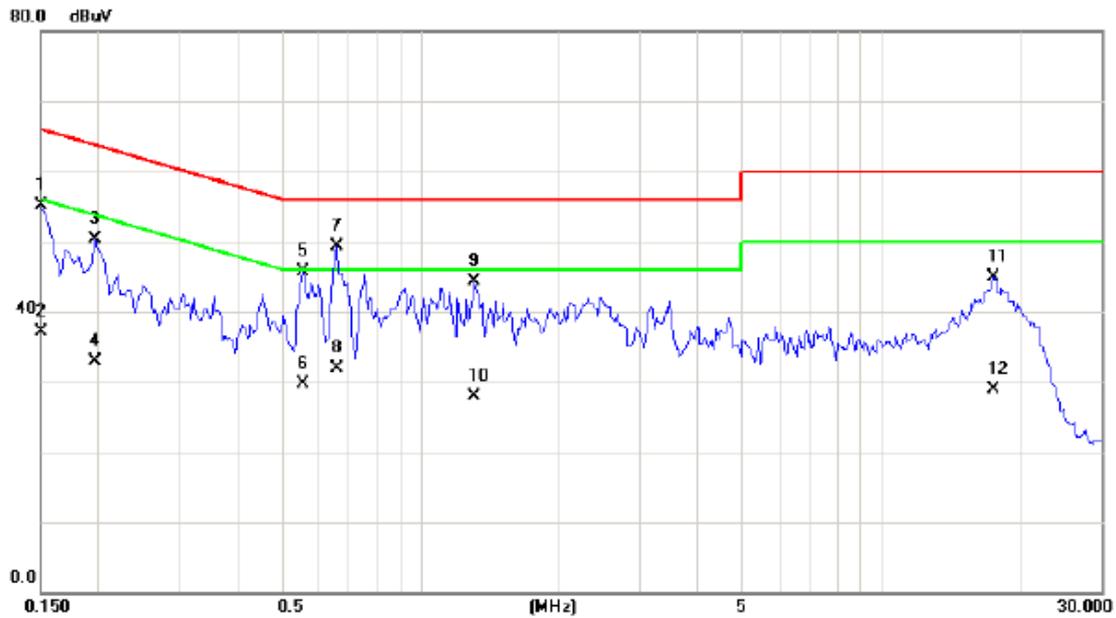

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	45.52	9.68	55.20	66.00	-10.80	QP	
2		0.1500	27.50	9.68	37.18	56.00	-18.82	AVG	
3		0.1970	40.66	9.71	50.37	63.74	-13.37	QP	
4		0.1970	23.10	9.71	32.81	53.74	-20.93	AVG	
5		0.5563	35.91	9.84	45.75	56.00	-10.25	QP	
6		0.5563	19.80	9.84	29.64	46.00	-16.36	AVG	
7	*	0.6578	39.51	9.89	49.40	56.00	-6.60	QP	
8		0.6578	22.10	9.89	31.99	46.00	-14.01	AVG	
9		1.3141	34.37	9.99	44.36	56.00	-11.64	QP	
10		1.3141	17.90	9.99	27.89	46.00	-18.11	AVG	
11		17.5586	34.55	10.33	44.88	60.00	-15.12	QP	
12		17.5586	18.60	10.33	28.93	50.00	-21.07	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU(EU Plug)


Neutral

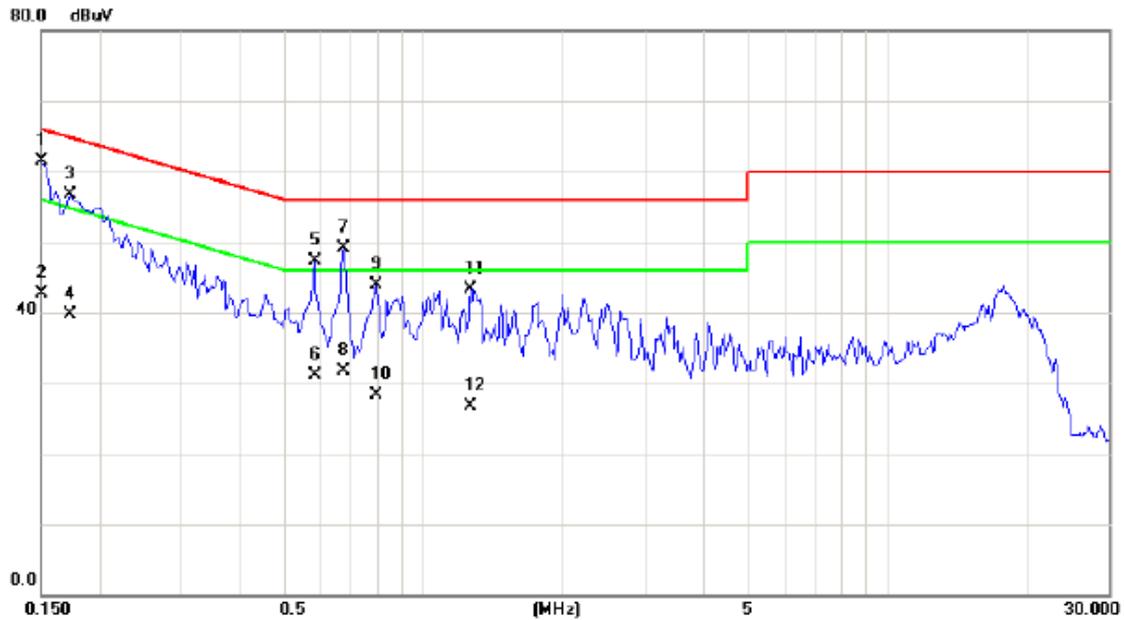

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	51.81	9.60	61.41	66.00	-4.59	QP	
2		0.1500	33.10	9.60	42.70	56.00	-13.30	AVG	
3		0.1734	47.03	9.60	56.63	64.80	-8.17	QP	
4		0.1734	30.20	9.60	39.80	54.80	-15.00	AVG	
5		0.5836	37.73	9.67	47.40	56.00	-8.60	QP	
6		0.5836	21.40	9.67	31.07	46.00	-14.93	AVG	
7		0.6734	39.35	9.69	49.04	56.00	-6.96	QP	
8		0.6734	22.10	9.69	31.79	46.00	-14.21	AVG	
9		0.7945	34.19	9.73	43.92	56.00	-12.08	QP	
10		0.7945	18.60	9.73	28.33	46.00	-17.67	AVG	
11		1.2633	33.42	9.81	43.23	56.00	-12.77	QP	
12		1.2633	16.80	9.81	26.61	46.00	-19.39	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug)


Line

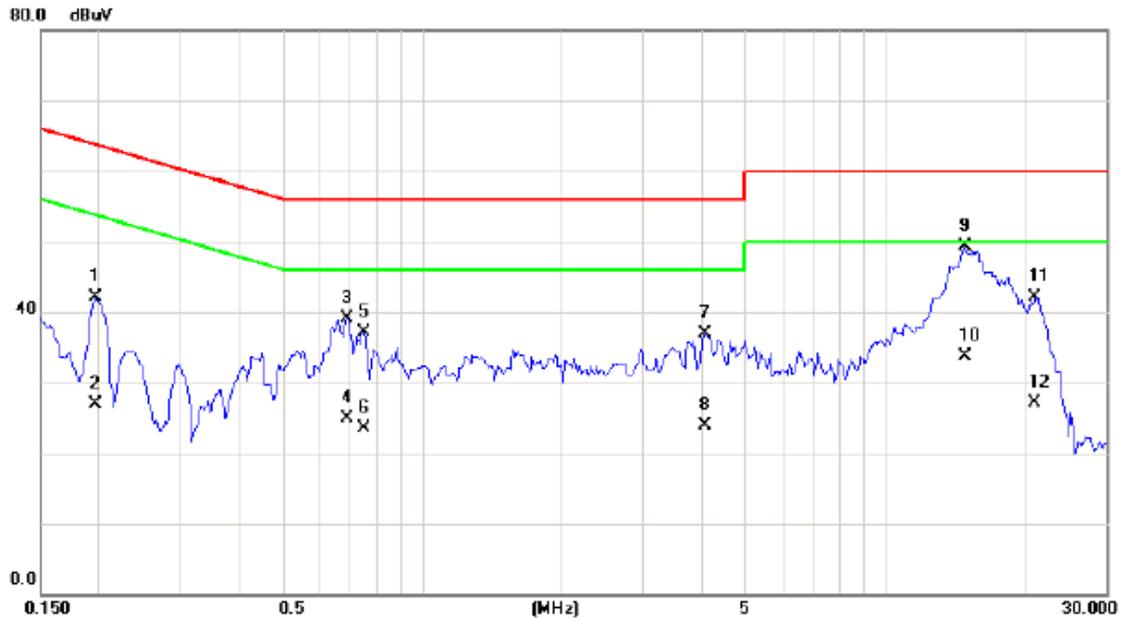

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1970	32.46	9.71	42.17	63.74	-21.57	QP	
2		0.1970	17.10	9.71	26.81	53.74	-26.93	AVG	
3		0.6891	29.14	9.90	39.04	56.00	-16.96	QP	
4		0.6891	15.10	9.90	25.00	46.00	-21.00	AVG	
5		0.7477	27.13	9.91	37.04	56.00	-18.96	QP	
6		0.7477	13.60	9.91	23.51	46.00	-22.49	AVG	
7		4.0781	27.08	9.80	36.88	56.00	-19.12	QP	
8		4.0781	14.20	9.80	24.00	46.00	-22.00	AVG	
9	*	14.8477	39.02	10.28	49.30	60.00	-10.70	QP	
10		14.8477	23.40	10.28	33.68	50.00	-16.32	AVG	
11		21.0860	31.63	10.39	42.02	60.00	-17.98	QP	
12		21.0860	16.80	10.39	27.19	50.00	-22.81	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug)


Neutral

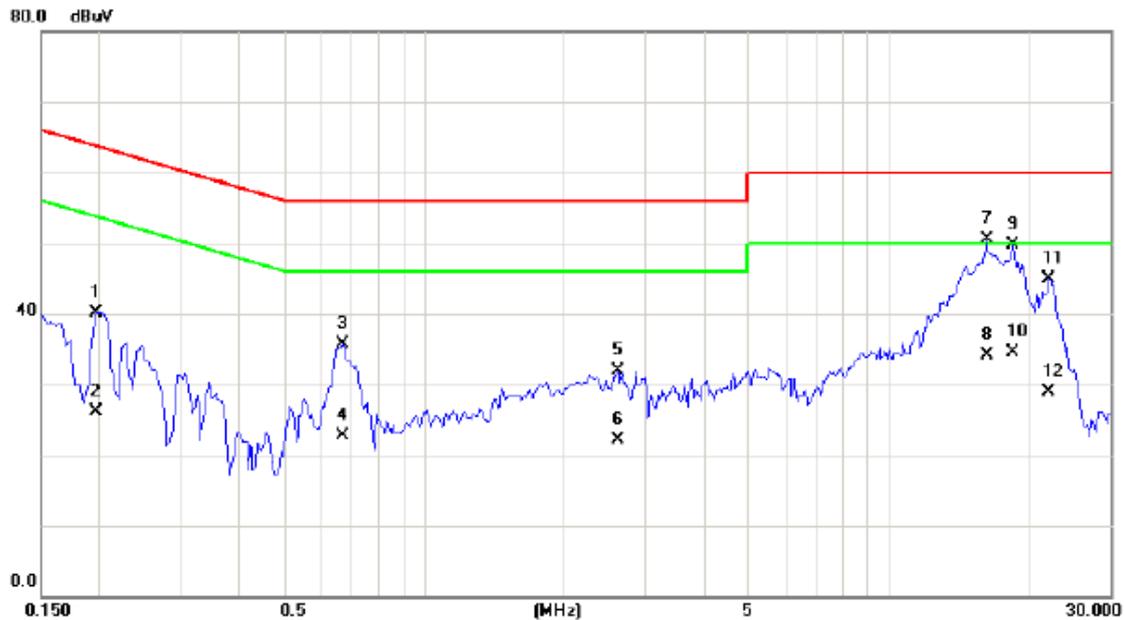

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1970	30.48	9.61	40.09	63.74	-23.65	QP	
2		0.1970	16.40	9.61	26.01	53.74	-27.73	AVG	
3		0.6695	25.99	9.69	35.68	56.00	-20.32	QP	
4		0.6695	13.10	9.69	22.79	46.00	-23.21	AVG	
5		2.6187	22.05	9.86	31.91	56.00	-24.09	QP	
6		2.6187	12.30	9.86	22.16	46.00	-23.84	AVG	
7	*	16.2930	40.32	10.27	50.59	60.00	-9.41	QP	
8		16.2930	23.90	10.27	34.17	50.00	-15.83	AVG	
9		18.5195	39.34	10.28	49.62	60.00	-10.38	QP	
10		18.5195	24.30	10.28	34.58	50.00	-15.42	AVG	
11		22.1797	34.53	10.33	44.86	60.00	-15.14	QP	
12		22.1797	18.60	10.33	28.93	50.00	-21.07	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG(EU Plug)


Line

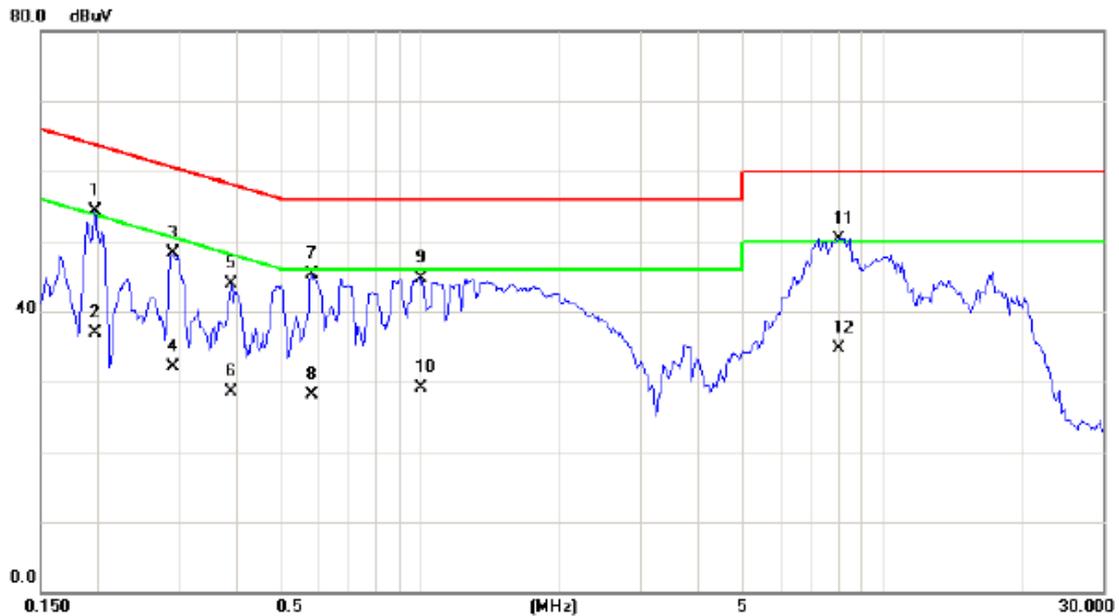

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1970	44.62	9.71	54.33	63.74	-9.41	QP	
2		0.1970	27.20	9.71	36.91	53.74	-16.83	AVG	
3		0.2906	38.49	9.75	48.24	60.51	-12.27	QP	
4		0.2906	22.40	9.75	32.15	50.51	-18.36	AVG	
5		0.3883	34.06	9.81	43.87	58.10	-14.23	QP	
6		0.3883	18.70	9.81	28.51	48.10	-19.59	AVG	
7		0.5797	35.51	9.85	45.36	56.00	-10.64	QP	
8		0.5797	18.20	9.85	28.05	46.00	-17.95	AVG	
9		1.0016	34.78	9.98	44.76	56.00	-11.24	QP	
10		1.0016	19.10	9.98	29.08	46.00	-16.92	AVG	
11		8.0430	40.36	10.00	50.36	60.00	-9.64	QP	
12		8.0430	24.80	10.00	34.80	50.00	-15.20	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG (EU Plug)


Neutral

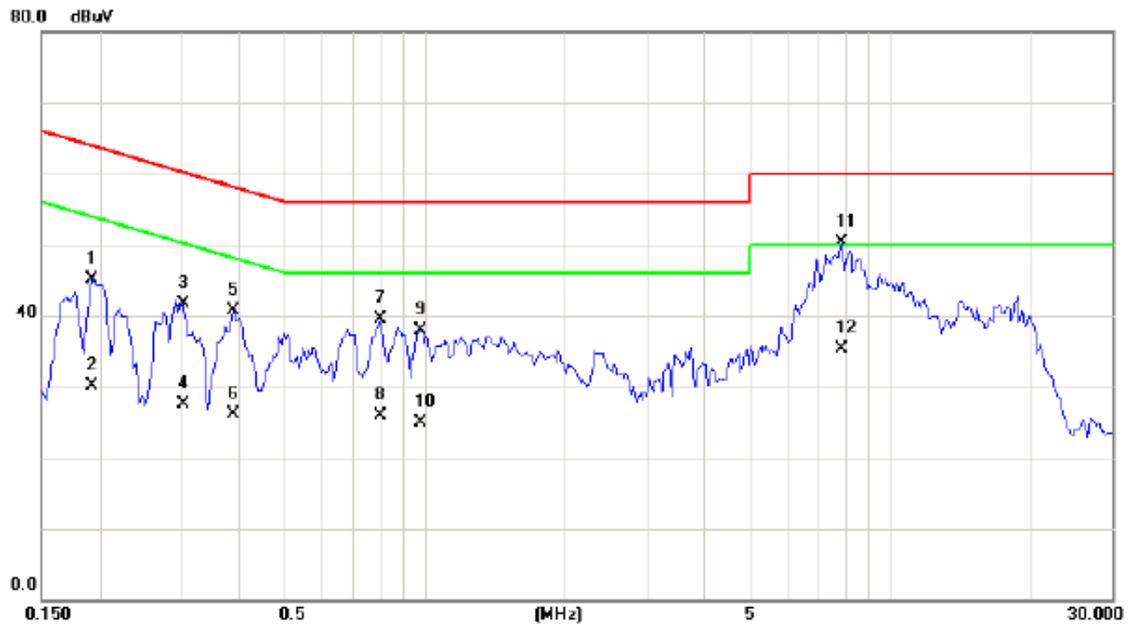

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1930	35.52	9.61	45.13	63.91	-18.78	QP	
2		0.1930	20.50	9.61	30.11	53.91	-23.80	AVG	
3		0.3023	32.10	9.63	41.73	60.18	-18.45	QP	
4		0.3023	17.80	9.63	27.43	50.18	-22.75	AVG	
5		0.3883	31.00	9.63	40.63	58.10	-17.47	QP	
6		0.3883	16.40	9.63	26.03	48.10	-22.07	AVG	
7		0.8023	29.84	9.73	39.57	56.00	-16.43	QP	
8		0.8023	16.20	9.73	25.93	46.00	-20.07	AVG	
9		0.9820	28.06	9.79	37.85	56.00	-18.15	QP	
10		0.9820	15.10	9.79	24.89	46.00	-21.11	AVG	
11	*	7.8672	40.22	10.12	50.34	60.00	-9.66	QP	
12		7.8672	25.10	10.12	35.22	50.00	-14.78	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle


Line

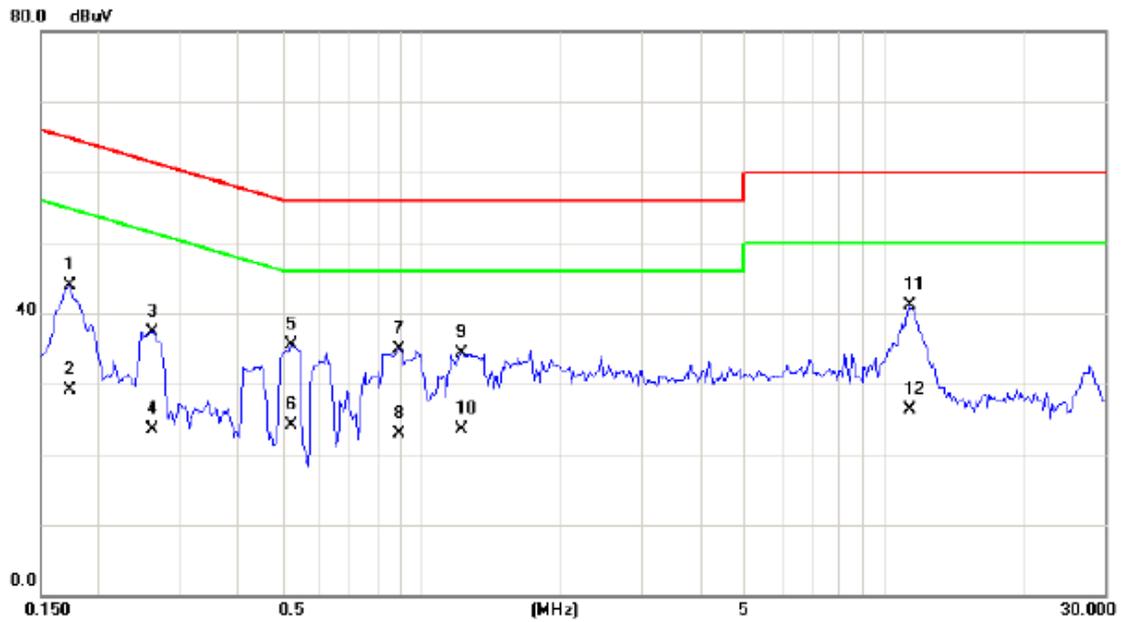

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1734	34.14	9.69	43.83	64.80	-20.97	QP	
2		0.1734	19.40	9.69	29.09	54.80	-25.71	AVG	
3		0.2594	27.63	9.74	37.37	61.45	-24.08	QP	
4		0.2594	13.70	9.74	23.44	51.45	-28.01	AVG	
5		0.5211	25.60	9.82	35.42	56.00	-20.58	QP	
6		0.5211	14.30	9.82	24.12	46.00	-21.88	AVG	
7		0.8922	24.90	9.95	34.85	56.00	-21.15	QP	
8		0.8922	12.90	9.95	22.85	46.00	-23.15	AVG	
9		1.2164	24.35	10.01	34.36	56.00	-21.64	QP	
10		1.2164	13.40	10.01	23.41	46.00	-22.59	AVG	
11	*	11.3711	30.96	10.12	41.08	60.00	-18.92	QP	
12		11.3711	16.20	10.12	26.32	50.00	-23.68	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle

Neutral

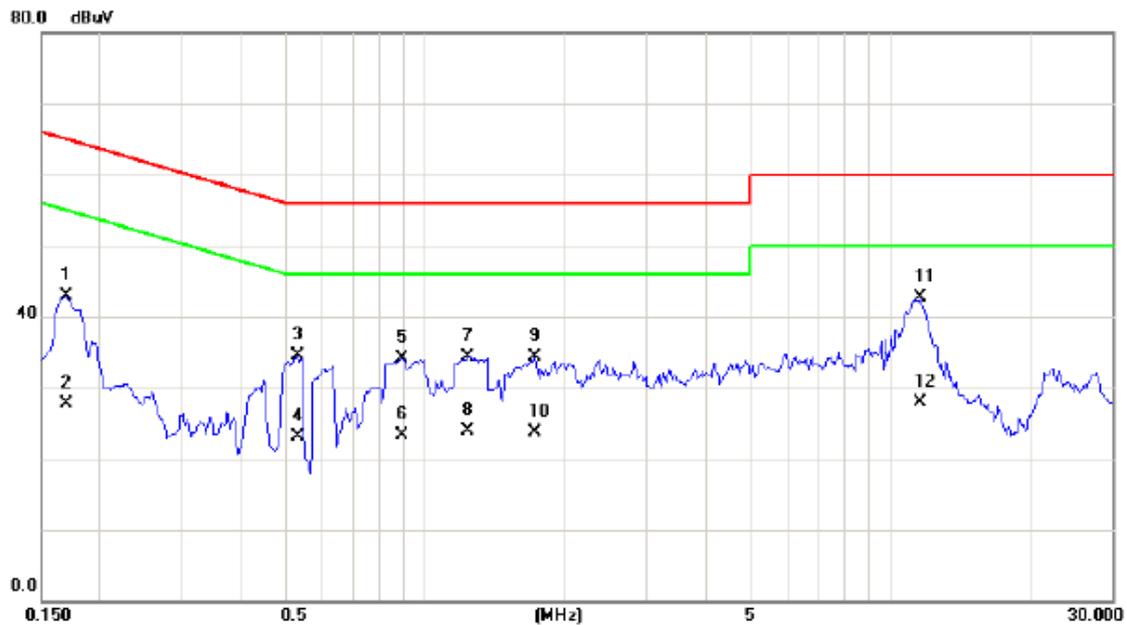


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1695	33.22	9.60	42.82	64.98	-22.16	QP	
2		0.1695	18.10	9.60	27.70	54.98	-27.28	AVG	
3		0.5328	24.89	9.66	34.55	56.00	-21.45	QP	
4		0.5328	13.40	9.66	23.06	46.00	-22.94	AVG	
5		0.8921	24.38	9.75	34.13	56.00	-21.87	QP	
6		0.8921	13.50	9.75	23.25	46.00	-22.75	AVG	
7		1.2398	24.50	9.80	34.30	56.00	-21.70	QP	
8		1.2398	14.20	9.80	24.00	46.00	-22.00	AVG	
9		1.7242	24.43	9.86	34.29	56.00	-21.71	QP	
10		1.7242	13.80	9.86	23.66	46.00	-22.34	AVG	
11	*	11.5820	32.67	10.11	42.78	60.00	-17.22	QP	
12		11.5820	17.70	10.11	27.81	50.00	-22.19	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


Vertical

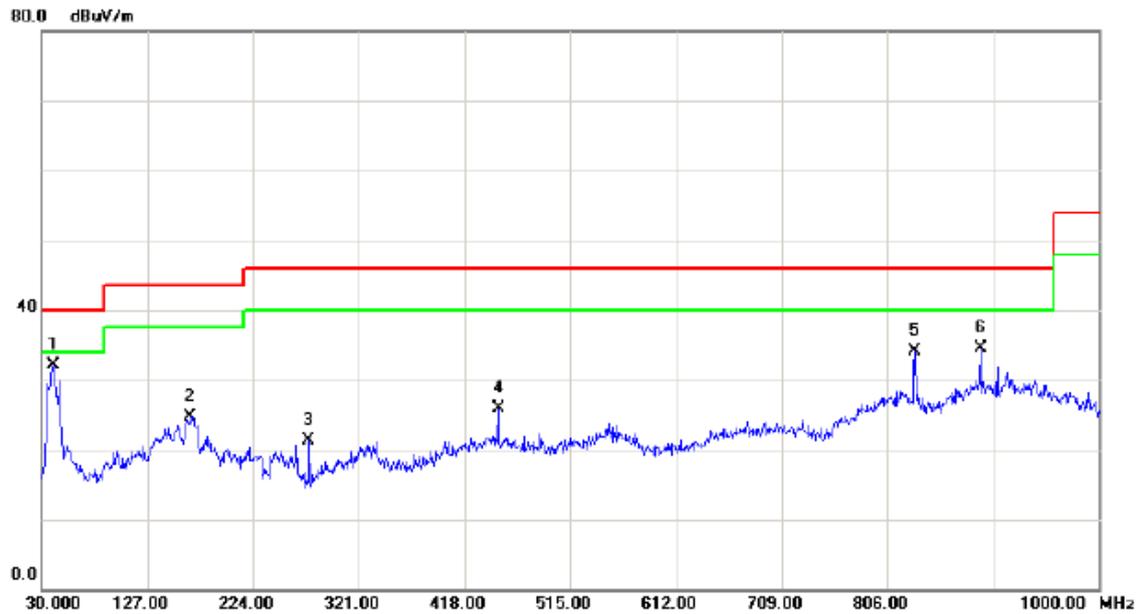

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40.6700	46.32	-14.13	32.19	40.00	-7.81	QP	
2		166.7700	39.01	-14.26	24.75	43.50	-18.75	QP	
3		275.4100	35.31	-14.07	21.24	46.00	-24.76	QP	
4		449.0400	35.66	-9.68	25.98	46.00	-20.02	QP	
5		831.2200	38.34	-4.18	34.16	46.00	-11.84	QP	
6		891.3600	37.42	-3.00	34.42	46.00	-11.58	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


Horizontal

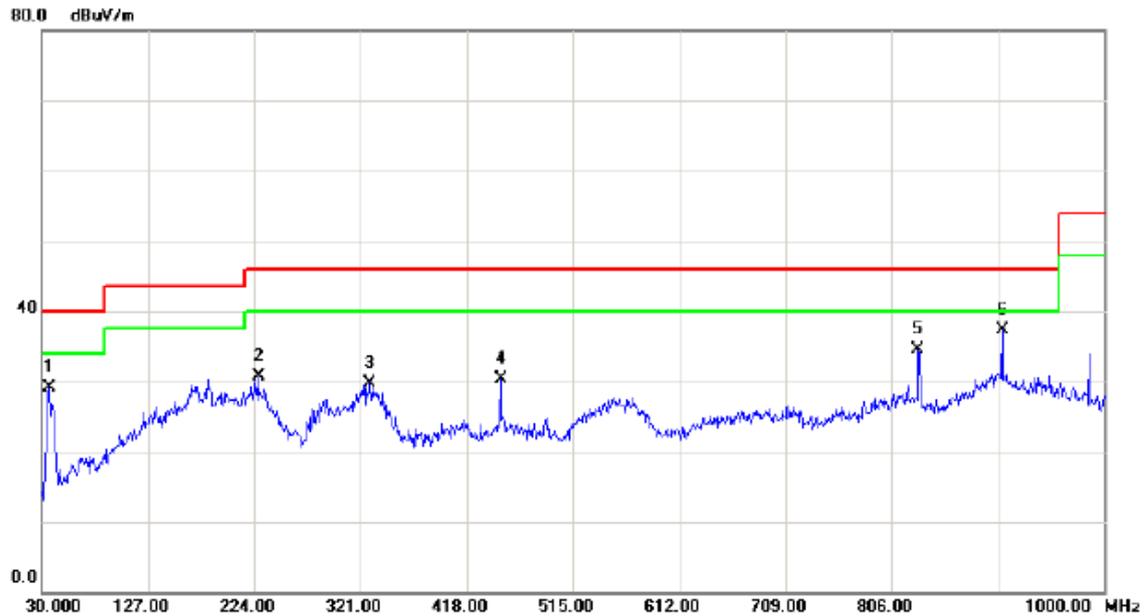

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		36.7900	43.85	-14.81	29.04	40.00	-10.96	QP	
2		227.8800	46.76	-15.99	30.77	46.00	-15.23	QP	
3		329.7300	42.40	-12.71	29.69	46.00	-16.31	QP	
4		449.0400	39.97	-9.68	30.29	46.00	-15.71	QP	
5		830.2500	38.64	-4.20	34.44	46.00	-11.56	QP	
6	*	906.8800	39.90	-2.67	37.23	46.00	-8.77	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: BYD


Vertical

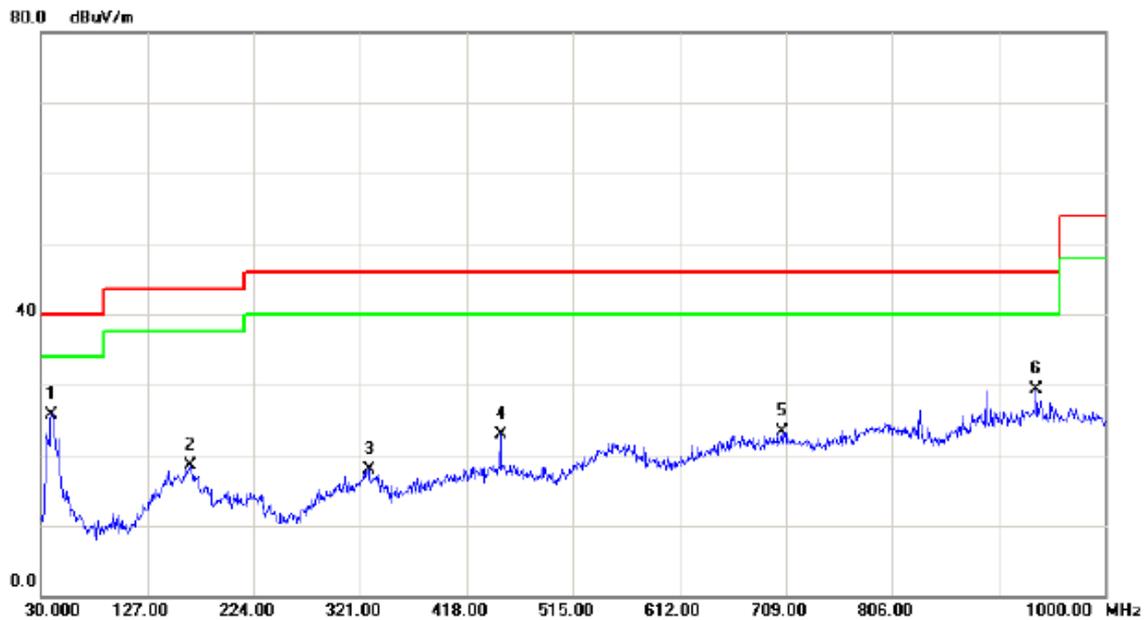

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39.7000	40.02	-14.25	25.77	40.00	-14.23	QP	
2		165.8000	32.62	-14.21	18.41	43.50	-25.09	QP	
3		328.7600	30.71	-12.74	17.97	46.00	-28.03	QP	
4		449.0400	32.56	-9.68	22.88	46.00	-23.12	QP	
5		705.1200	28.71	-5.38	23.33	46.00	-22.67	QP	
6		936.9500	31.39	-2.03	29.36	46.00	-16.64	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: BYD


Horizontal

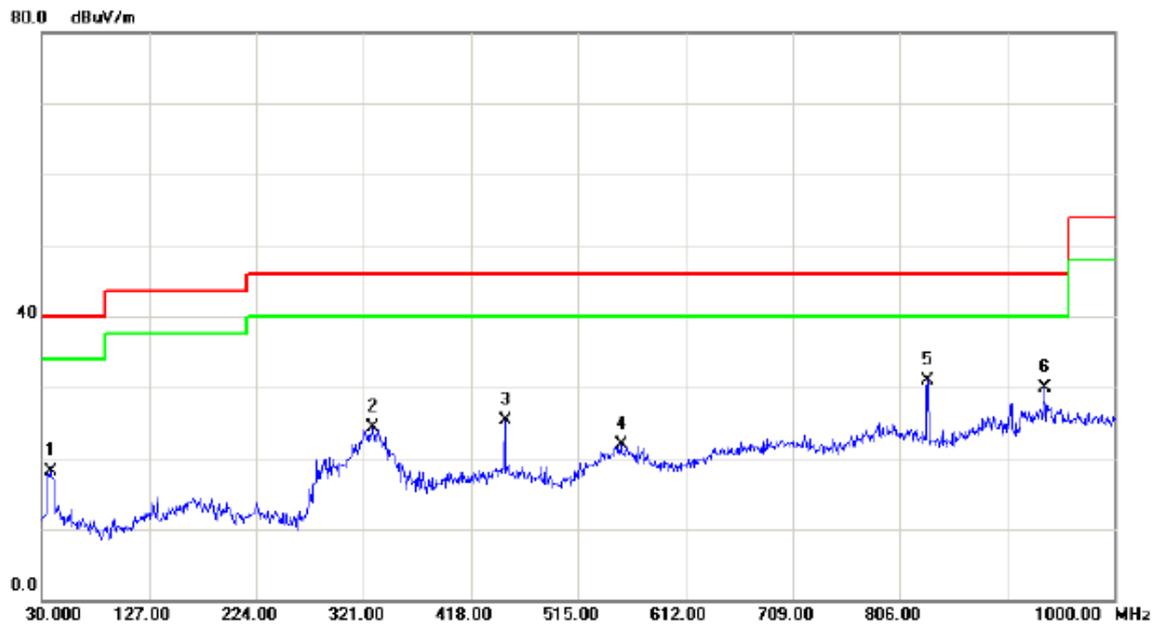

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	32.74	-14.62	18.12	40.00	-21.88	QP	
2		329.7300	37.05	-12.71	24.34	46.00	-21.66	QP	
3		449.0400	35.02	-9.68	25.34	46.00	-20.66	QP	
4		553.8000	29.88	-7.94	21.94	46.00	-24.06	QP	
5	*	831.2200	35.16	-4.18	30.98	46.00	-15.02	QP	
6		936.9500	31.86	-2.03	29.83	46.00	-16.17	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


Vertical

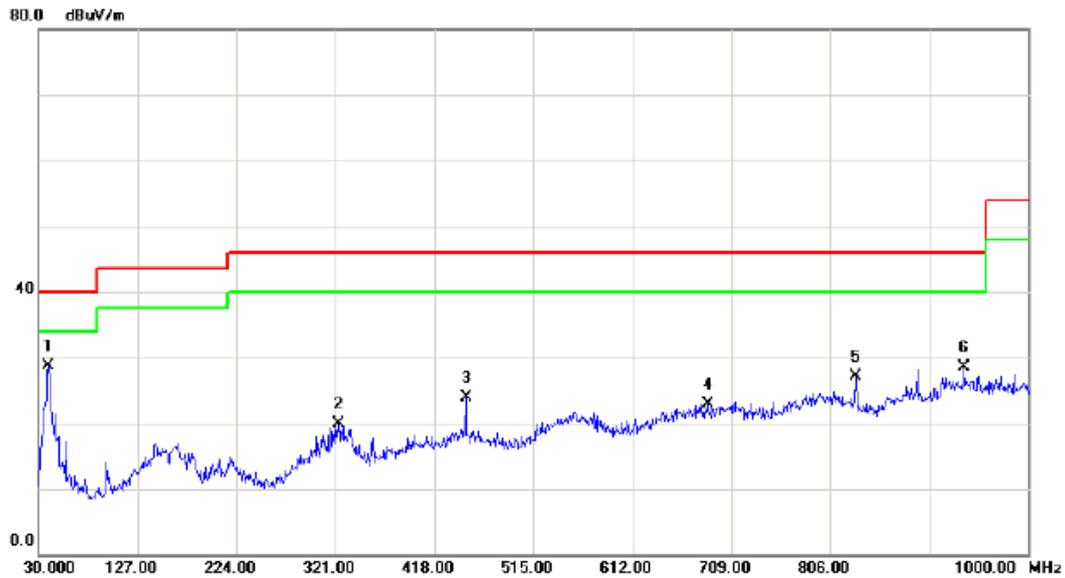

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39.7000	42.89	-14.25	28.64	40.00	-11.36	QP	
2		323.9100	32.85	-12.85	20.00	46.00	-26.00	QP	
3		449.0400	33.49	-9.68	23.81	46.00	-22.19	QP	
4		685.7200	28.79	-5.84	22.95	46.00	-23.05	QP	
5		831.2200	31.25	-4.18	27.07	46.00	-18.93	QP	
6		936.9500	30.45	-2.03	28.42	46.00	-17.58	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


Horizontal

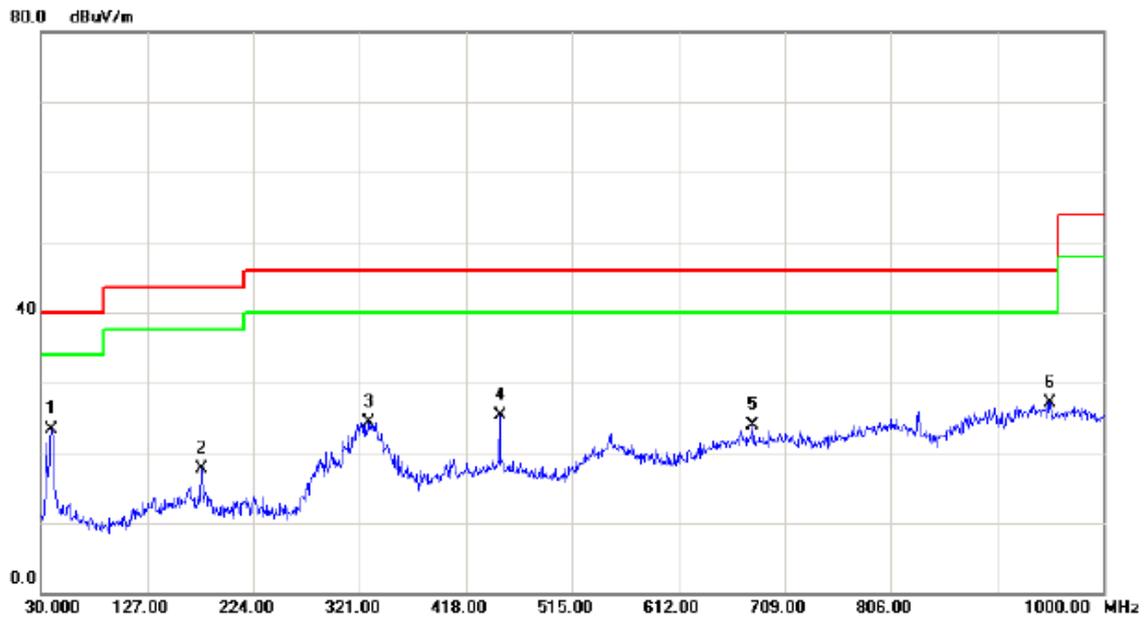

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39.7000	37.54	-14.25	23.29	40.00	-16.71	QP	
2		176.4700	32.68	-15.07	17.61	43.50	-25.89	QP	
3		329.7300	37.10	-12.71	24.39	46.00	-21.61	QP	
4		449.0400	34.94	-9.68	25.26	46.00	-20.74	QP	
5		679.9000	29.86	-6.02	23.84	46.00	-22.16	QP	
6		951.5000	28.88	-1.74	27.14	46.00	-18.86	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


Vertical

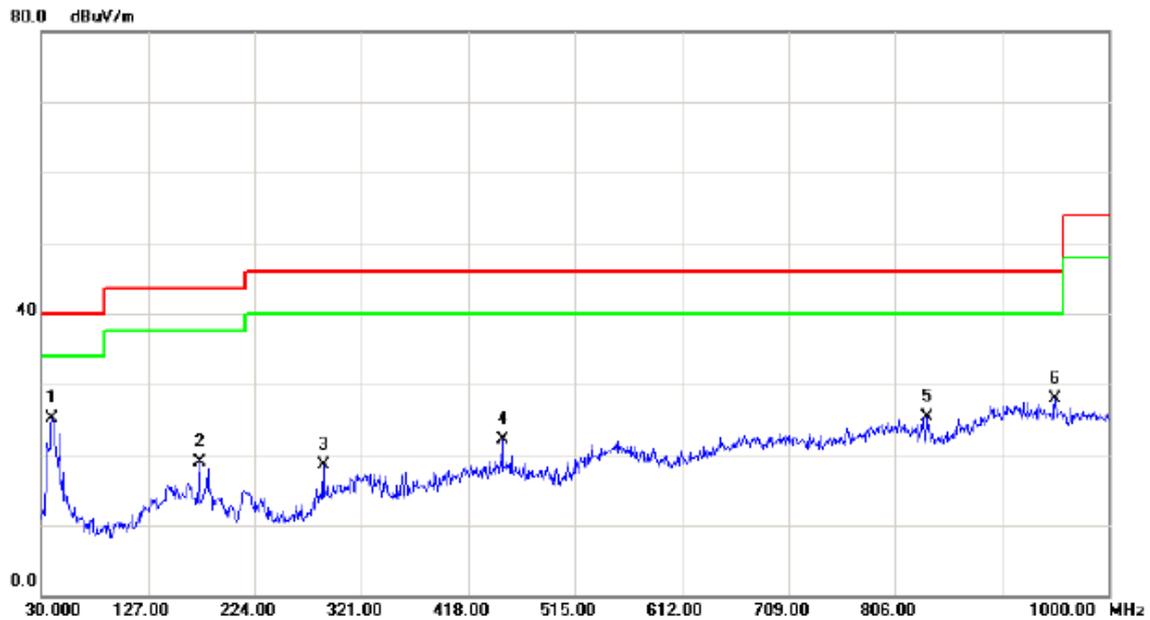

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39.7000	39.45	-14.25	25.20	40.00	-14.80	QP	
2		173.5600	33.69	-14.78	18.91	43.50	-24.59	QP	
3		286.0800	32.29	-13.80	18.49	46.00	-27.51	QP	
4		449.0400	31.73	-9.68	22.05	46.00	-23.95	QP	
5		835.1000	29.39	-4.11	25.28	46.00	-20.72	QP	
6		951.5000	29.58	-1.74	27.84	46.00	-18.16	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD

Horizontal

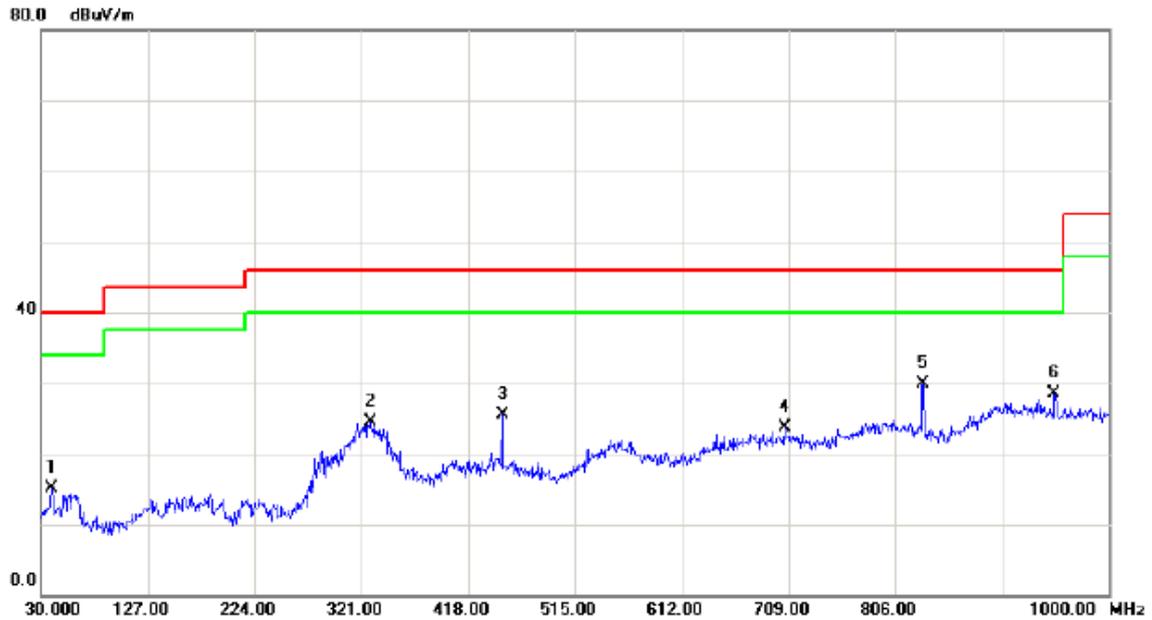

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	29.28	-14.25	15.03	40.00	-24.97	QP	
2		328.7600	37.19	-12.74	24.45	46.00	-21.55	QP	
3		449.0400	35.16	-9.68	25.48	46.00	-20.52	QP	
4		705.1200	29.07	-5.38	23.69	46.00	-22.31	QP	
5	*	831.2200	34.12	-4.18	29.94	46.00	-16.06	QP	
6		950.5300	30.23	-1.75	28.48	46.00	-17.52	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39.7000	39.03	-14.25	24.78	40.00	-15.22	QP	
2		159.0100	31.78	-13.93	17.85	43.50	-25.65	QP	
3		449.0400	32.73	-9.68	23.05	46.00	-22.95	QP	
4		668.2600	30.31	-6.36	23.95	46.00	-22.05	QP	
5		831.2200	31.33	-4.18	27.15	46.00	-18.85	QP	
6		891.3600	33.50	-3.00	30.50	46.00	-15.50	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	29.14	-14.25	14.89	40.00	-25.11	QP	
2		323.9100	37.50	-12.85	24.65	46.00	-21.35	QP	
3		449.0400	35.88	-9.68	26.20	46.00	-19.80	QP	
4		726.4600	28.30	-5.20	23.10	46.00	-22.90	QP	
5		831.2200	33.61	-4.18	29.43	46.00	-16.57	QP	
6	*	896.2100	34.84	-2.90	31.94	46.00	-14.06	QP	

Test Voltage:	DC 3.7V
Test Mode:	Playing+idle+speaker


Vertical

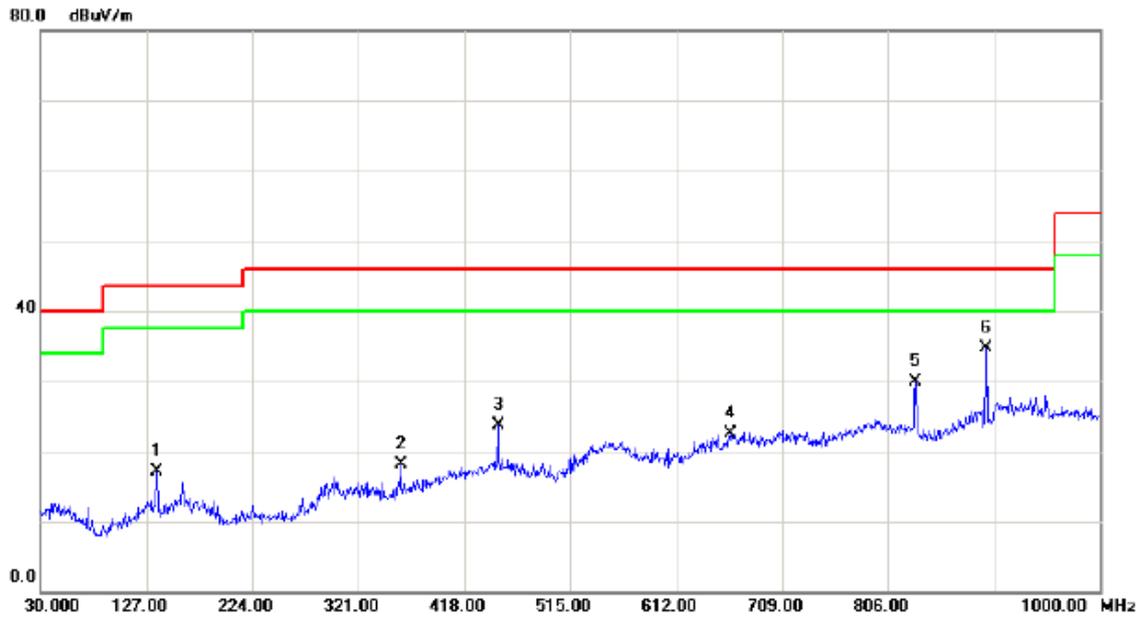

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		136.7000	31.76	-14.73	17.03	43.50	-26.47	QP	
2		359.8000	30.13	-12.08	18.05	46.00	-27.95	QP	
3		449.0400	33.31	-9.68	23.63	46.00	-22.37	QP	
4		661.4700	29.05	-6.57	22.48	46.00	-23.52	QP	
5		831.2200	34.02	-4.18	29.84	46.00	-16.16	QP	
6	*	896.2100	37.59	-2.90	34.69	46.00	-11.31	QP	

Test Voltage:	DC 3.7V
Test Mode:	Playing+idle+speaker


Horizontal

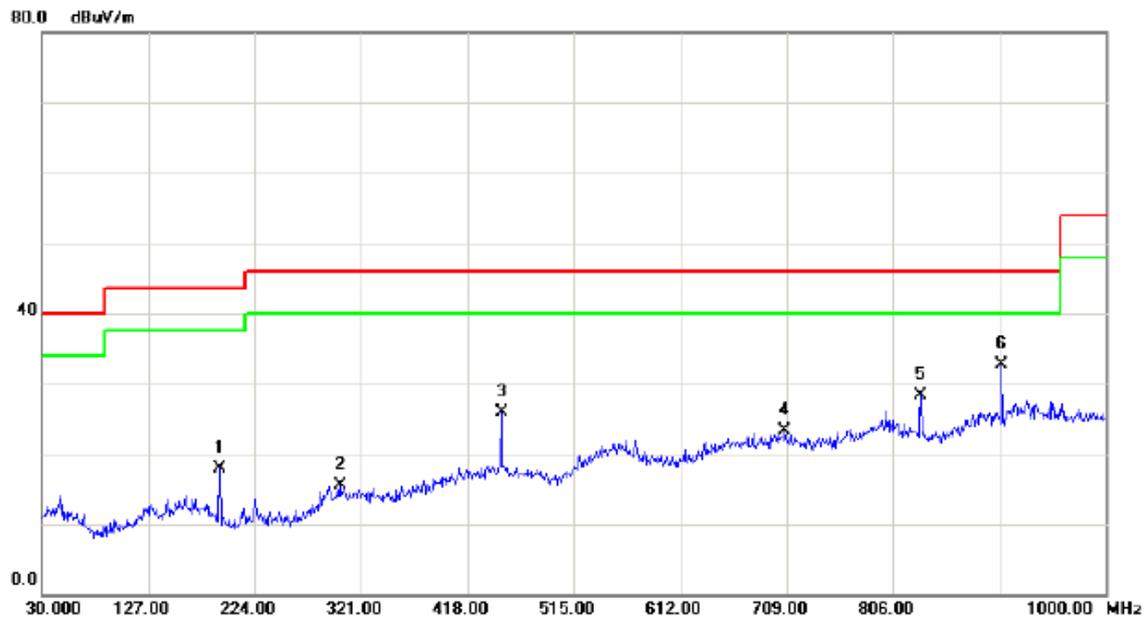

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		191.9900	34.67	-16.68	17.99	43.50	-25.51	QP	
2		301.6000	28.93	-13.44	15.49	46.00	-30.51	QP	
3		449.0400	35.66	-9.68	25.98	46.00	-20.02	QP	
4		707.0600	28.61	-5.36	23.25	46.00	-22.75	QP	
5		831.2200	32.57	-4.18	28.39	46.00	-17.61	QP	
6	*	904.9400	35.51	-2.72	32.79	46.00	-13.21	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Vertical

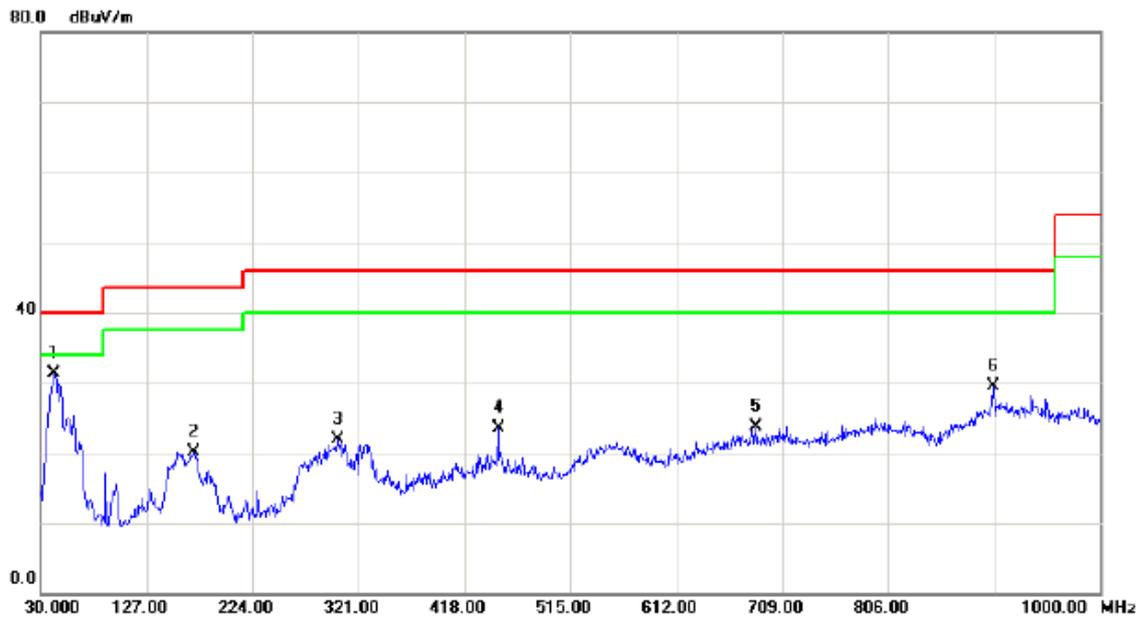

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	45.16	-13.92	31.24	40.00	-8.76	QP	
2		170.6500	34.59	-14.49	20.10	43.50	-23.40	QP	
3		302.5700	35.40	-13.42	21.98	46.00	-24.02	QP	
4		449.0400	33.24	-9.68	23.56	46.00	-22.44	QP	
5		684.7500	29.50	-5.87	23.63	46.00	-22.37	QP	
6		902.0300	32.28	-2.78	29.50	46.00	-16.50	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Horizontal

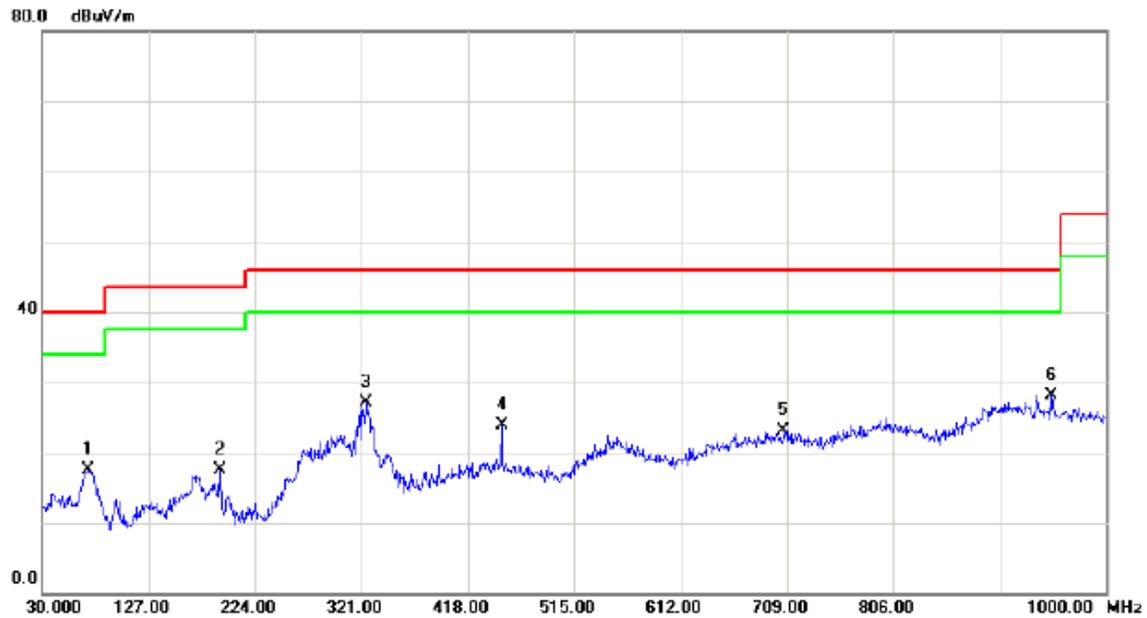

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		71.7100	34.15	-16.58	17.57	40.00	-22.43	QP	
2		191.9900	34.15	-16.68	17.47	43.50	-26.03	QP	
3		325.8500	39.86	-12.80	27.06	46.00	-18.94	QP	
4		449.0400	33.56	-9.68	23.88	46.00	-22.12	QP	
5		706.0900	28.44	-5.37	23.07	46.00	-22.93	QP	
6	*	950.5300	29.85	-1.75	28.10	46.00	-17.90	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Vertical

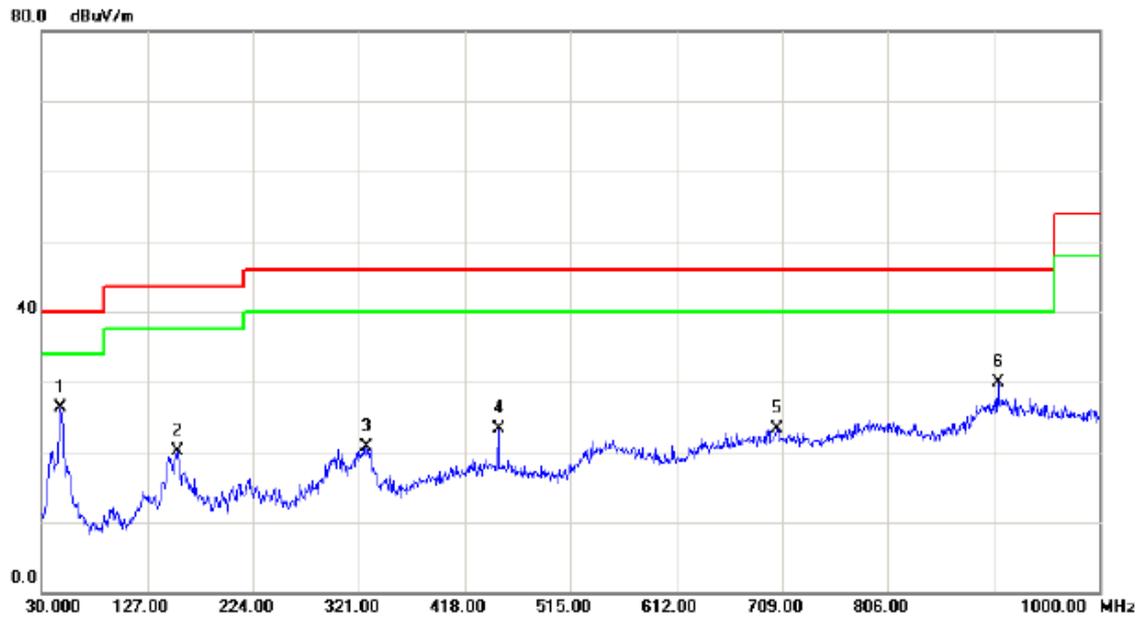

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	47.4600	39.95	-13.69	26.26	40.00	-13.74	QP	
2		154.1600	34.04	-14.00	20.04	43.50	-23.46	QP	
3		327.7900	33.49	-12.76	20.73	46.00	-25.27	QP	
4		449.0400	33.02	-9.68	23.34	46.00	-22.66	QP	
5		704.1500	28.77	-5.39	23.38	46.00	-22.62	QP	
6		906.8800	32.66	-2.67	29.99	46.00	-16.01	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Horizontal

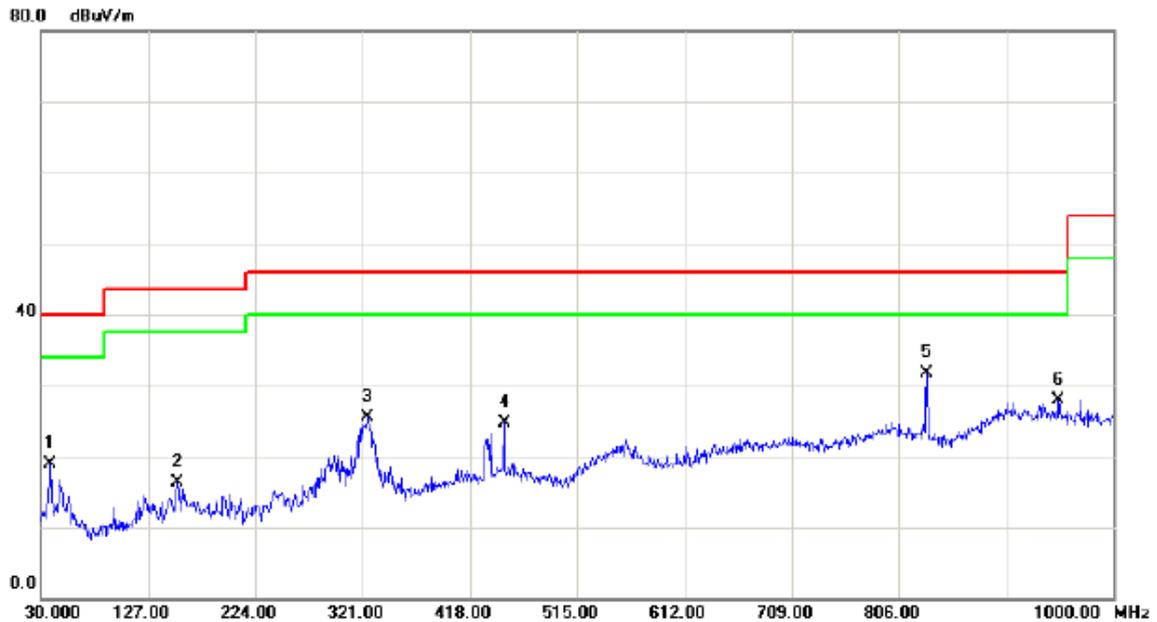

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		38.7300	33.32	-14.44	18.88	40.00	-21.12	QP	
2		153.1900	30.35	-14.01	16.34	43.50	-27.16	QP	
3		325.8500	38.29	-12.80	25.49	46.00	-20.51	QP	
4		449.0400	34.32	-9.68	24.64	46.00	-21.36	QP	
5	*	831.2200	35.94	-4.18	31.76	46.00	-14.24	QP	
6		950.5300	29.63	-1.75	27.88	46.00	-18.12	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


Vertical

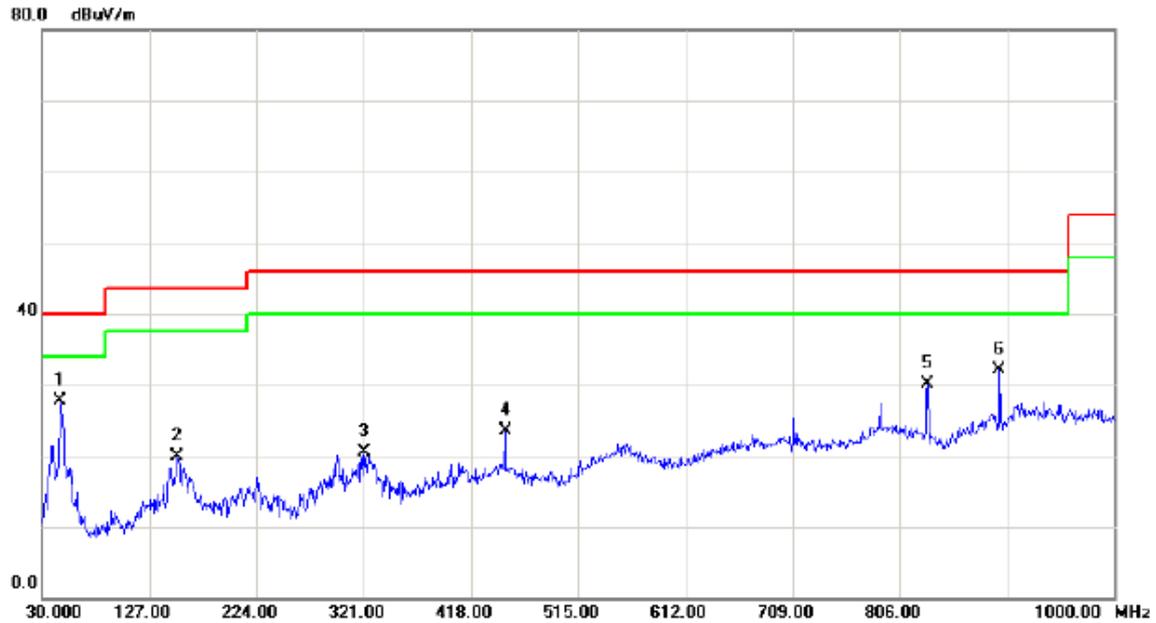

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	46.4900	41.42	-13.69	27.73	40.00	-12.27	QP	
2		152.2200	33.91	-14.03	19.88	43.50	-23.62	QP	
3		321.9700	33.49	-12.90	20.59	46.00	-25.41	QP	
4		449.0400	33.15	-9.68	23.47	46.00	-22.53	QP	
5		831.2200	34.28	-4.18	30.10	46.00	-15.90	QP	
6		896.2100	34.93	-2.90	32.03	46.00	-13.97	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG

Horizontal

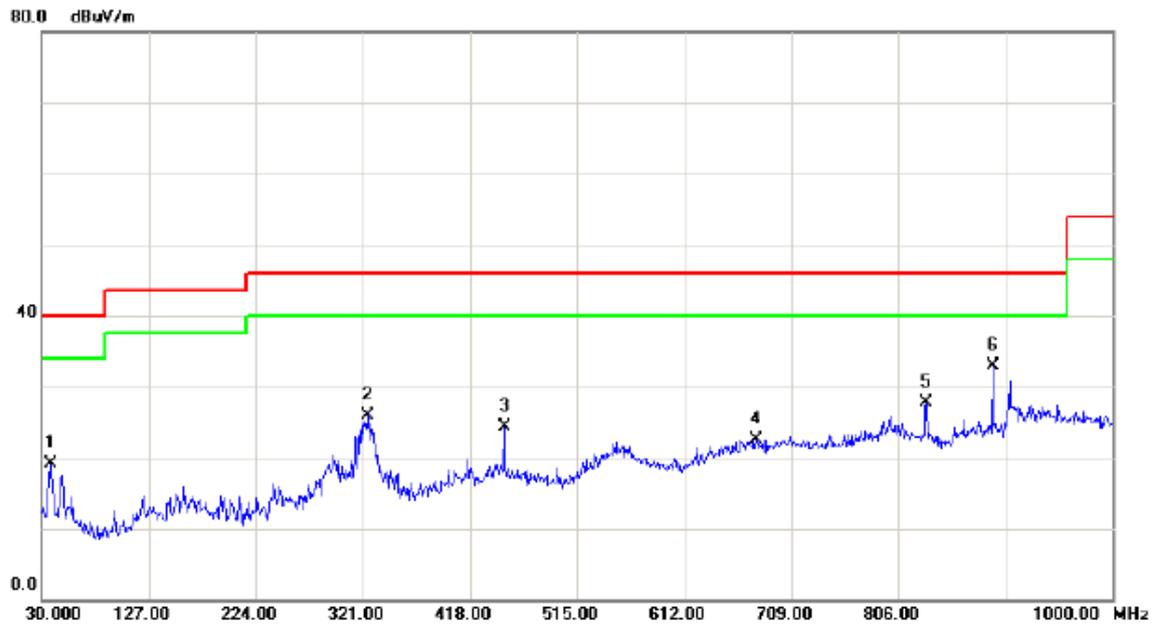

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	33.81	-14.62	19.19	40.00	-20.81	QP	
2		325.8500	38.80	-12.80	26.00	46.00	-20.00	QP	
3		449.0400	33.96	-9.68	24.28	46.00	-21.72	QP	
4		676.9900	28.65	-6.11	22.54	46.00	-23.46	QP	
5		831.2200	31.93	-4.18	27.75	46.00	-18.25	QP	
6	*	891.3600	35.90	-3.00	32.90	46.00	-13.10	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD (EU Plug)

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	40.76	-14.62	26.14	40.00	-13.86	QP	
2		326.8200	34.87	-12.78	22.09	46.00	-23.91	QP	
3		449.0400	32.85	-9.68	23.17	46.00	-22.83	QP	
4		561.5600	29.73	-7.86	21.87	46.00	-24.13	QP	
5		784.6600	29.92	-4.82	25.10	46.00	-20.90	QP	
6	*	891.3600	35.69	-3.00	32.69	46.00	-13.31	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD (EU Plug)

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		199.7500	35.52	-16.72	18.80	43.50	-24.70	QP	
2		326.8200	38.37	-12.78	25.59	46.00	-20.41	QP	
3		449.0400	34.29	-9.68	24.61	46.00	-21.39	QP	
4		708.0300	28.95	-5.36	23.59	46.00	-22.41	QP	
5		831.2200	33.27	-4.18	29.09	46.00	-16.91	QP	
6	*	891.3600	37.67	-3.00	34.67	46.00	-11.33	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU (EU Plug)


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	41.71	-13.92	27.79	40.00	-12.21	QP	
2		157.0700	35.79	-13.96	21.83	43.50	-21.67	QP	
3		298.6900	35.24	-13.52	21.72	46.00	-24.28	QP	
4		478.1400	34.00	-9.46	24.54	46.00	-21.46	QP	
5		831.2200	30.99	-4.18	26.81	46.00	-19.19	QP	
6		906.8800	35.32	-2.67	32.65	46.00	-13.35	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU (EU Plug)

Horizontal

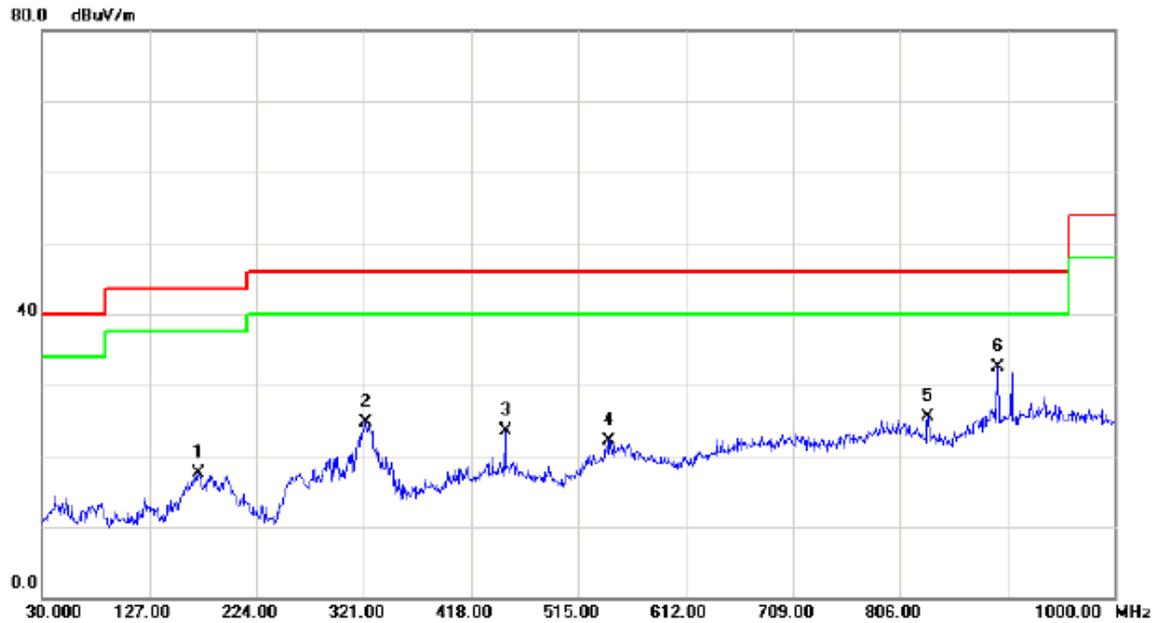

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		171.6200	32.00	-14.57	17.43	43.50	-26.07	QP	
2		322.9400	37.64	-12.88	24.76	46.00	-21.24	QP	
3		449.0400	33.16	-9.68	23.48	46.00	-22.52	QP	
4		542.1600	30.28	-8.19	22.09	46.00	-23.91	QP	
5		831.2200	29.77	-4.18	25.59	46.00	-20.41	QP	
6	*	894.2700	35.49	-2.94	32.55	46.00	-13.45	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK (EU Plug)


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	48.4300	43.87	-13.69	30.18	40.00	-9.82	QP	
2		150.2800	33.48	-14.04	19.44	43.50	-24.06	QP	
3		317.1200	33.87	-13.02	20.85	46.00	-25.15	QP	
4		449.0400	33.42	-9.68	23.74	46.00	-22.26	QP	
5		831.2200	36.71	-4.18	32.53	46.00	-13.47	QP	
6		906.8800	37.95	-2.67	35.28	46.00	-10.72	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK (EU Plug)

Horizontal

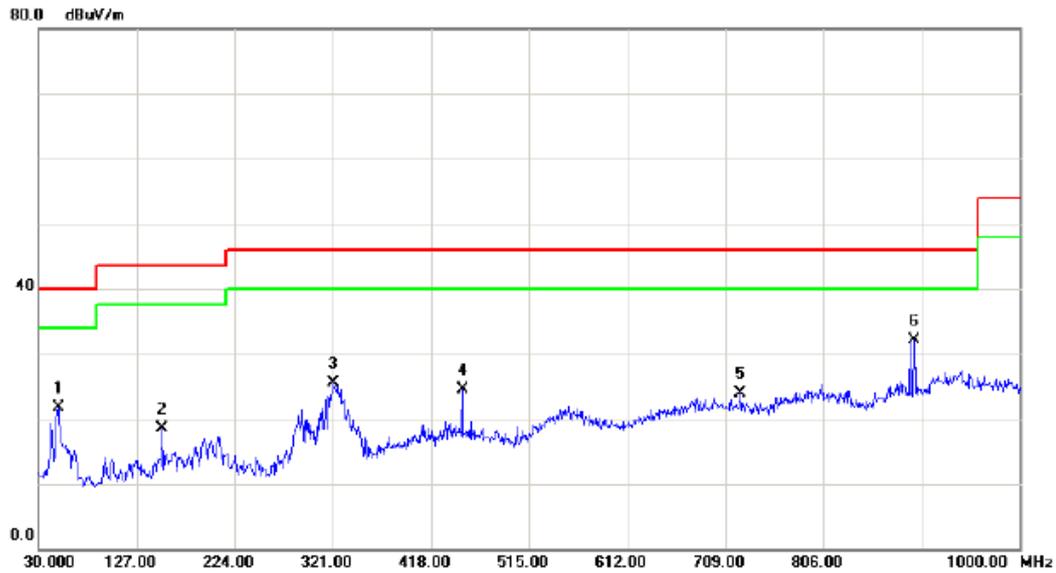

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		49.4000	35.44	-13.69	21.75	40.00	-18.25	QP	
2		152.2200	32.44	-14.03	18.41	43.50	-25.09	QP	
3		321.9700	38.41	-12.90	25.51	46.00	-20.49	QP	
4		449.0400	34.16	-9.68	24.48	46.00	-21.52	QP	
5		723.5500	29.22	-5.23	23.99	46.00	-22.01	QP	
6	*	896.2100	35.04	-2.90	32.14	46.00	-13.86	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG (EU Plug)

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		46.4900	38.95	-13.69	25.26	40.00	-14.74	QP	
2		202.6600	36.34	-16.68	19.66	43.50	-23.84	QP	
3		342.3400	36.22	-12.41	23.81	46.00	-22.19	QP	
4		449.0400	34.02	-9.68	24.34	46.00	-21.66	QP	
5		804.0600	29.79	-4.67	25.12	46.00	-20.88	QP	
6	*	906.8800	34.19	-2.67	31.52	46.00	-14.48	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG (EU Plug)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	33.06	-14.62	18.44	40.00	-21.56	QP	
2		191.0200	34.81	-16.68	18.13	43.50	-25.37	QP	
3		326.8200	38.38	-12.78	25.60	46.00	-20.40	QP	
4		457.7700	34.99	-9.61	25.38	46.00	-20.62	QP	
5		670.2000	29.76	-6.31	23.45	46.00	-22.55	QP	
6	*	895.2400	34.76	-2.93	31.83	46.00	-14.17	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle

Vertical

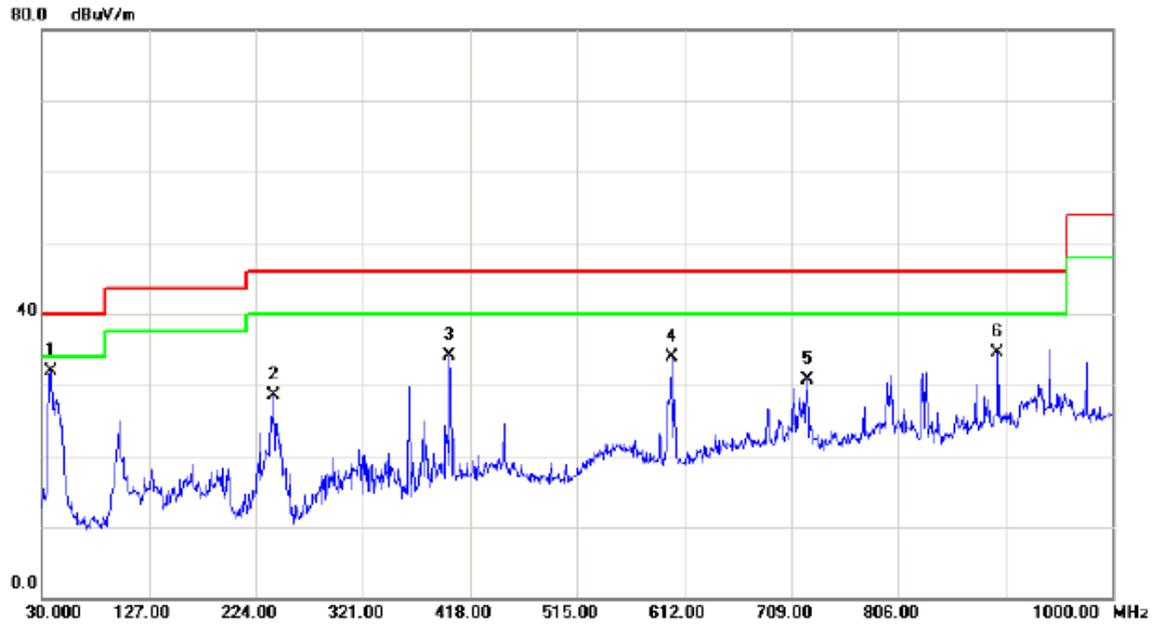

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	46.45	-14.62	31.83	40.00	-8.17	QP	
2		240.4900	43.82	-15.25	28.57	46.00	-17.43	QP	
3		399.5700	45.25	-11.10	34.15	46.00	-11.85	QP	
4		600.3600	41.43	-7.46	33.97	46.00	-12.03	QP	
5		723.5500	36.01	-5.23	30.78	46.00	-15.22	QP	
6		896.2100	37.41	-2.90	34.51	46.00	-11.49	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle

Horizontal




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	38.85	-14.62	24.23	40.00	-15.77	QP	
2		240.4900	47.61	-15.25	32.36	46.00	-13.64	QP	
3	*	399.5700	46.71	-11.10	35.61	46.00	-10.39	QP	
4		600.3600	40.64	-7.46	33.18	46.00	-12.82	QP	
5		800.1800	34.59	-4.74	29.85	46.00	-16.15	QP	
6		908.8200	35.75	-2.65	33.10	46.00	-12.90	QP	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


Vertical

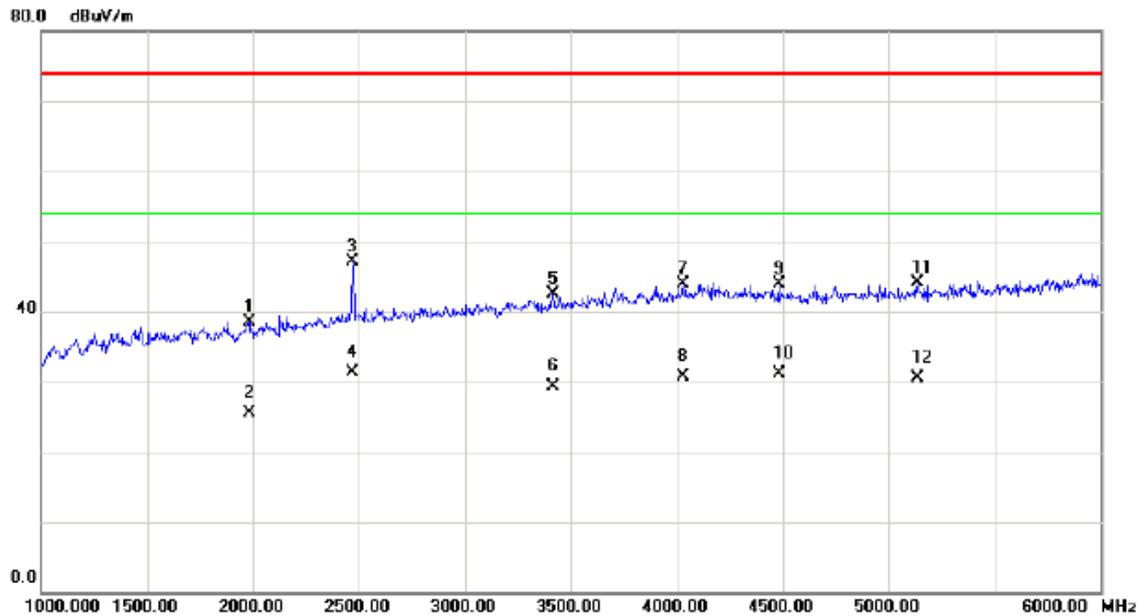

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1980.000	40.52	-1.97	38.55	74.00	-35.45	peak	
2		1980.000	27.42	-1.97	25.45	54.00	-28.55	AVG	
3		2470.000	47.04	-0.03	47.01	74.00	-26.99	peak	
4	*	2470.000	31.38	-0.03	31.35	54.00	-22.65	AVG	
5		3415.000	39.69	2.80	42.49	74.00	-31.51	peak	
6		3415.000	26.48	2.80	29.28	54.00	-24.72	AVG	
7		4030.000	37.22	6.64	43.86	74.00	-30.14	peak	
8		4030.000	24.00	6.64	30.64	54.00	-23.36	AVG	
9		4480.000	36.93	6.91	43.84	74.00	-30.16	peak	
10		4480.000	24.28	6.91	31.19	54.00	-22.81	AVG	
11		5135.000	36.08	8.04	44.12	74.00	-29.88	peak	
12		5135.000	22.48	8.04	30.52	54.00	-23.48	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


Horizontal

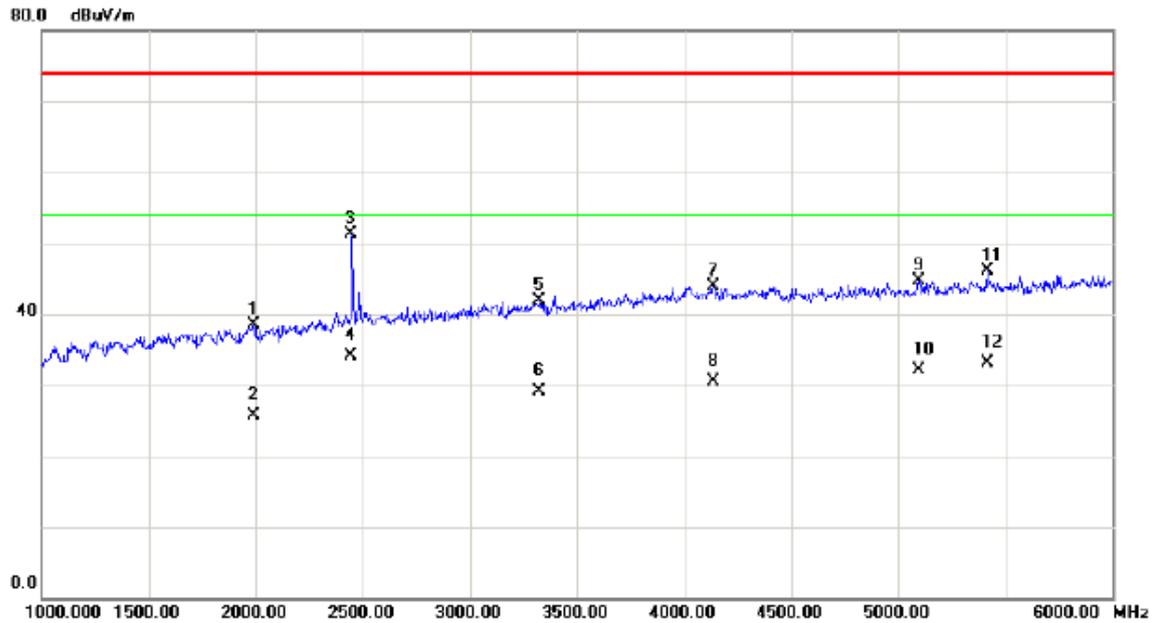

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1990.000	40.47	-1.92	38.55	74.00	-35.45	peak	
2	1990.000	27.58	-1.92	25.66	54.00	-28.34	AVG	
3	2445.000	51.49	-0.14	51.35	74.00	-22.65	peak	
4 *	2445.000	34.33	-0.14	34.19	54.00	-19.81	AVG	
5	3325.000	39.28	2.60	41.88	74.00	-32.12	peak	
6	3325.000	26.53	2.60	29.13	54.00	-24.87	AVG	
7	4135.000	37.16	6.70	43.86	74.00	-30.14	peak	
8	4135.000	23.84	6.70	30.54	54.00	-23.46	AVG	
9	5095.000	36.76	7.92	44.68	74.00	-29.32	peak	
10	5095.000	24.10	7.92	32.02	54.00	-21.98	AVG	
11	5415.000	37.24	8.89	46.13	74.00	-27.87	peak	
12	5415.000	24.31	8.89	33.20	54.00	-20.80	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


Vertical

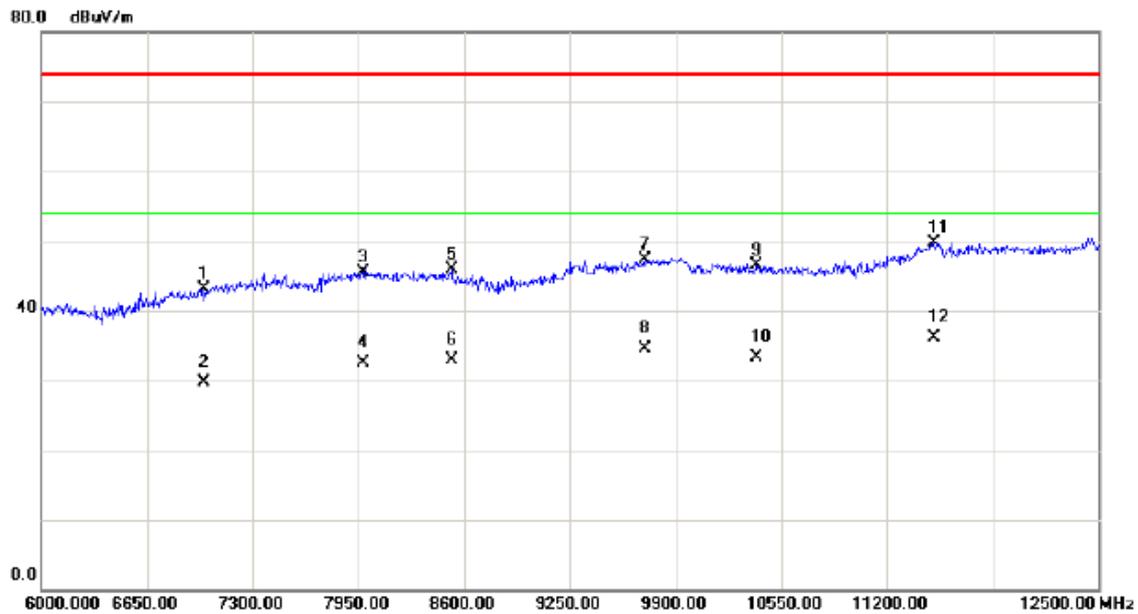

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7001.000	29.32	13.88	43.20	74.00	-30.80	peak	
2		7001.000	15.89	13.88	29.77	54.00	-24.23	AVG	
3		7976.000	29.45	16.09	45.54	74.00	-28.46	peak	
4		7976.000	16.36	16.09	32.45	54.00	-21.55	AVG	
5		8522.000	30.44	15.43	45.87	74.00	-28.13	peak	
6		8522.000	17.53	15.43	32.96	54.00	-21.04	AVG	
7		9711.500	31.71	15.55	47.26	74.00	-26.74	peak	
8		9711.500	18.88	15.55	34.43	54.00	-19.57	AVG	
9		10394.000	32.04	14.43	46.47	74.00	-27.53	peak	
10		10394.000	18.80	14.43	33.23	54.00	-20.77	AVG	
11		11486.000	29.61	20.15	49.76	74.00	-24.24	peak	
12	*	11486.000	16.01	20.15	36.16	54.00	-17.84	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


Horizontal

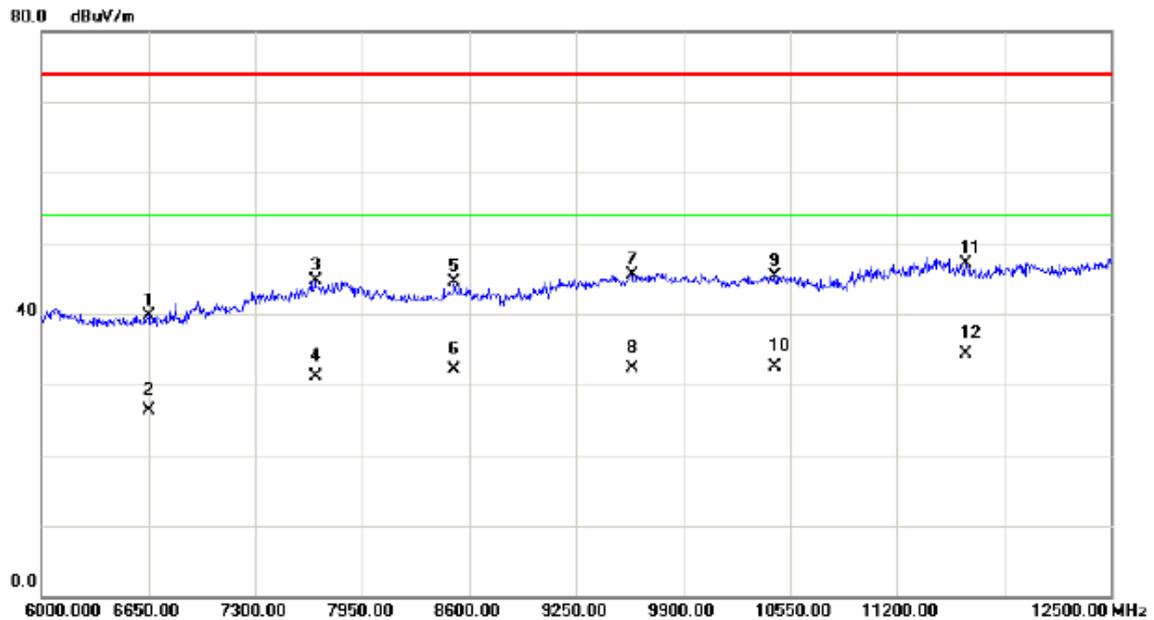

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6650.000	27.31	12.49	39.80	74.00	-34.20	peak	
2		6650.000	13.72	12.49	26.21	54.00	-27.79	AVG	
3		7664.000	28.68	16.01	44.69	74.00	-29.31	peak	
4		7664.000	15.10	16.01	31.11	54.00	-22.89	AVG	
5		8509.000	29.00	15.41	44.41	74.00	-29.59	peak	
6		8509.000	16.73	15.41	32.14	54.00	-21.86	AVG	
7		9588.000	30.27	15.33	45.60	74.00	-28.40	peak	
8		9588.000	17.06	15.33	32.39	54.00	-21.61	AVG	
9		10459.000	31.08	14.16	45.24	74.00	-28.76	peak	
10		10459.000	18.37	14.16	32.53	54.00	-21.47	AVG	
11		11616.000	26.22	20.88	47.10	74.00	-26.90	peak	
12	*	11616.000	13.33	20.88	34.21	54.00	-19.79	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: BYD


Vertical

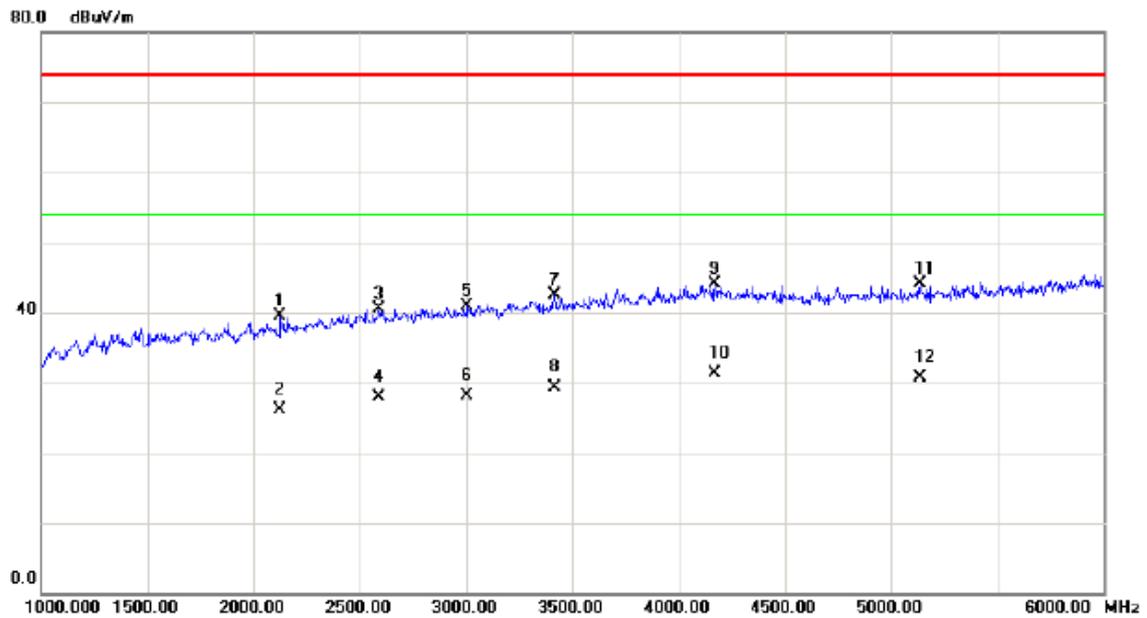

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2125.000	40.87	-1.39	39.48	74.00	-34.52	peak	
2		2125.000	27.46	-1.39	26.07	54.00	-27.93	AVG	
3		2590.000	40.15	0.40	40.55	74.00	-33.45	peak	
4		2590.000	27.46	0.40	27.86	54.00	-26.14	AVG	
5		3005.000	39.14	1.85	40.99	74.00	-33.01	peak	
6		3005.000	26.20	1.85	28.05	54.00	-25.95	AVG	
7		3415.000	39.69	2.80	42.49	74.00	-31.51	peak	
8		3415.000	26.57	2.80	29.37	54.00	-24.63	AVG	
9		4170.000	37.30	6.71	44.01	74.00	-29.99	peak	
10	*	4170.000	24.51	6.71	31.22	54.00	-22.78	AVG	
11		5135.000	36.08	8.04	44.12	74.00	-29.88	peak	
12		5135.000	22.70	8.04	30.74	54.00	-23.26	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: BYD


Horizontal

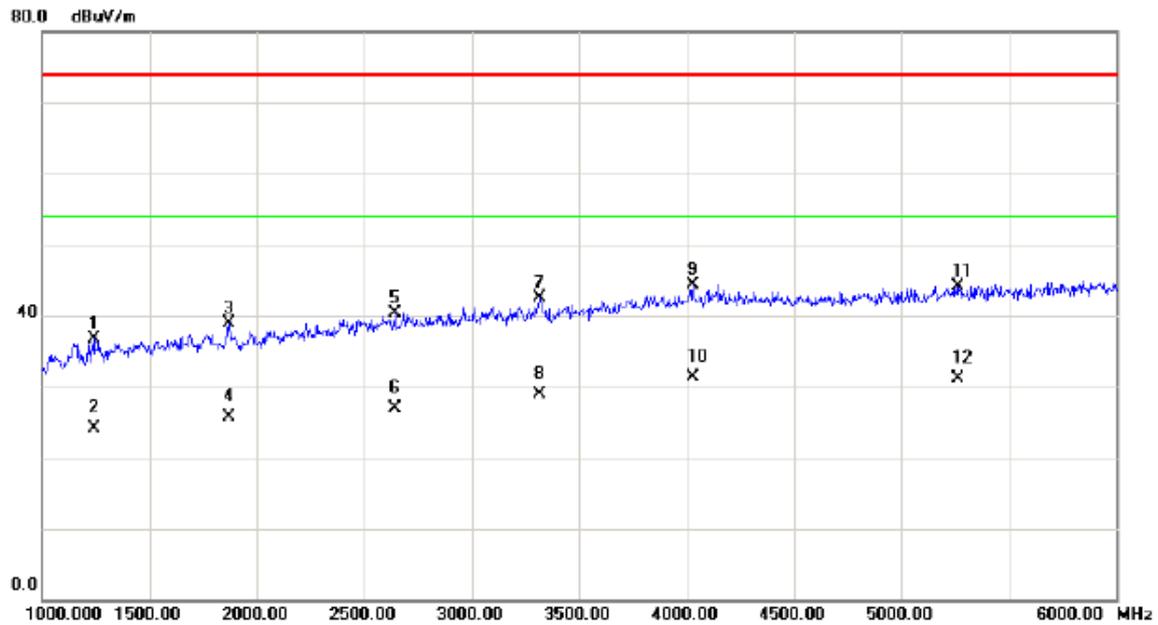

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1240.000	41.50	-4.82	36.68	74.00	-37.32	peak	
2		1240.000	28.92	-4.82	24.10	54.00	-29.90	AVG	
3		1870.000	41.39	-2.45	38.94	74.00	-35.06	peak	
4		1870.000	28.11	-2.45	25.66	54.00	-28.34	AVG	
5		2640.000	39.79	0.58	40.37	74.00	-33.63	peak	
6		2640.000	26.33	0.58	26.91	54.00	-27.09	AVG	
7		3315.000	39.95	2.57	42.52	74.00	-31.48	peak	
8		3315.000	26.40	2.57	28.97	54.00	-25.03	AVG	
9		4030.000	37.66	6.64	44.30	74.00	-29.70	peak	
10	*	4030.000	24.75	6.64	31.39	54.00	-22.61	AVG	
11		5260.000	35.66	8.42	44.08	74.00	-29.92	peak	
12		5260.000	22.74	8.42	31.16	54.00	-22.84	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


Vertical

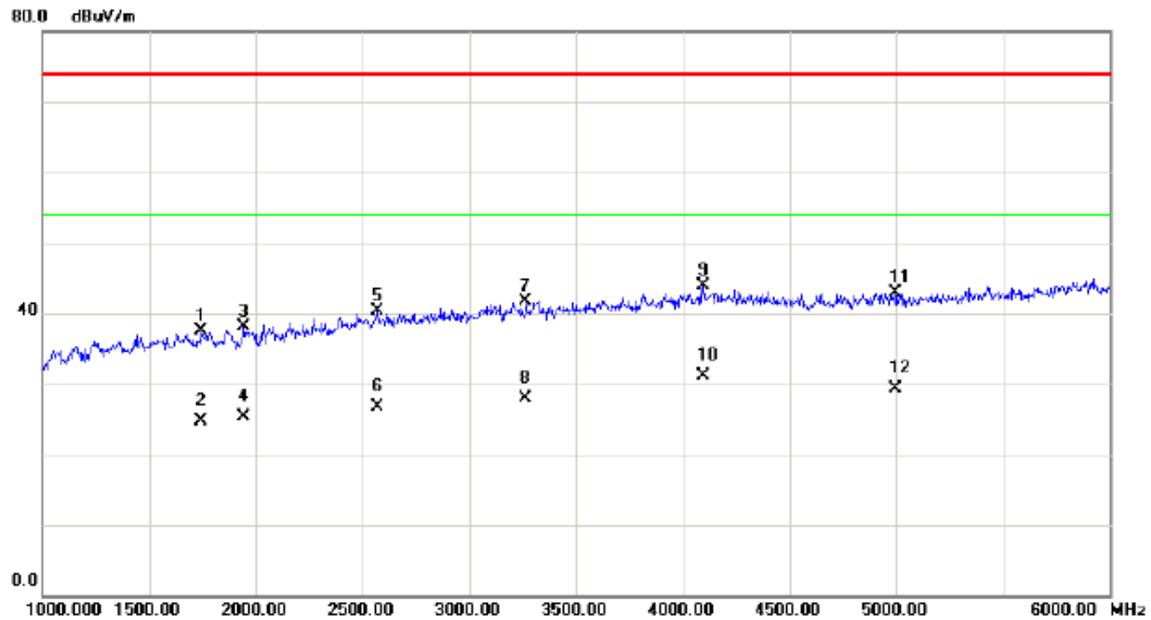

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1745.000	40.49	-2.99	37.50	74.00	-36.50	peak	
2		1745.000	27.61	-2.99	24.62	54.00	-29.38	AVG	
3		1945.000	40.30	-2.12	38.18	74.00	-35.82	peak	
4		1945.000	27.45	-2.12	25.33	54.00	-28.67	AVG	
5		2570.000	39.95	0.32	40.27	74.00	-33.73	peak	
6		2570.000	26.31	0.32	26.63	54.00	-27.37	AVG	
7		3265.000	39.17	2.46	41.63	74.00	-32.37	peak	
8		3265.000	25.52	2.46	27.98	54.00	-26.02	AVG	
9		4095.000	37.25	6.68	43.93	74.00	-30.07	peak	
10	*	4095.000	24.38	6.68	31.06	54.00	-22.94	AVG	
11		4995.000	35.27	7.63	42.90	74.00	-31.10	peak	
12		4995.000	21.64	7.63	29.27	54.00	-24.73	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


Horizontal

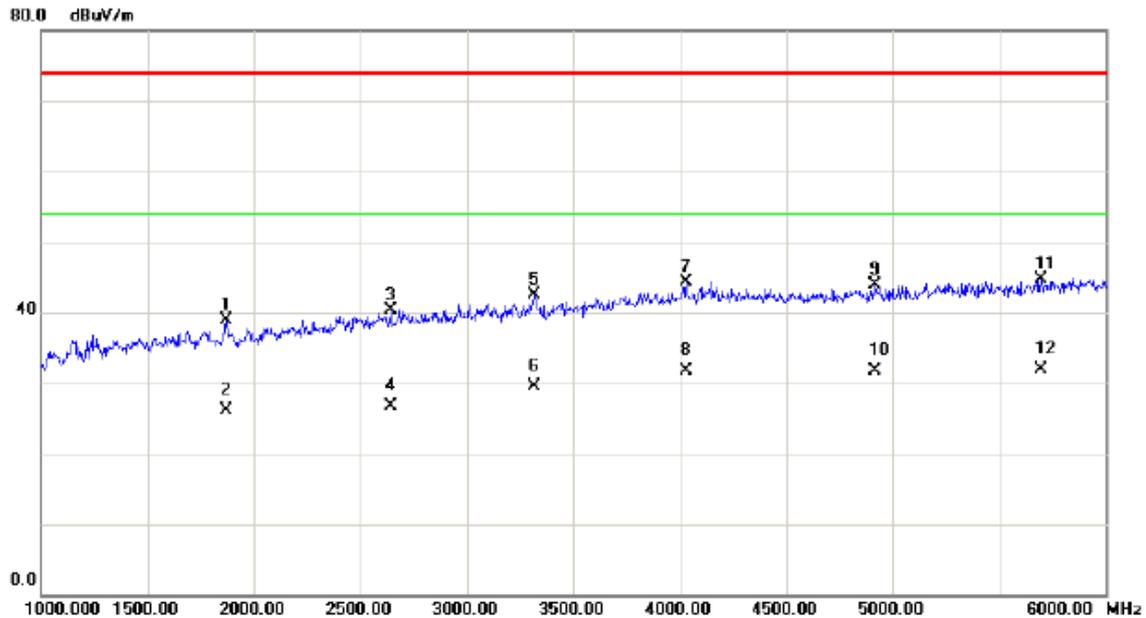

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1870.000	41.39	-2.45	38.94	74.00	-35.06	peak	
2		1870.000	28.64	-2.45	26.19	54.00	-27.81	AVG	
3		2640.000	39.79	0.58	40.37	74.00	-33.63	peak	
4		2640.000	26.12	0.58	26.70	54.00	-27.30	AVG	
5		3315.000	39.95	2.57	42.52	74.00	-31.48	peak	
6		3315.000	26.84	2.57	29.41	54.00	-24.59	AVG	
7		4030.000	37.66	6.64	44.30	74.00	-29.70	peak	
8		4030.000	25.00	6.64	31.64	54.00	-22.36	AVG	
9		4915.000	36.44	7.51	43.95	74.00	-30.05	peak	
10		4915.000	24.27	7.51	31.78	54.00	-22.22	AVG	
11		5695.000	35.39	9.37	44.76	74.00	-29.24	peak	
12	*	5695.000	22.46	9.37	31.83	54.00	-22.17	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


Vertical

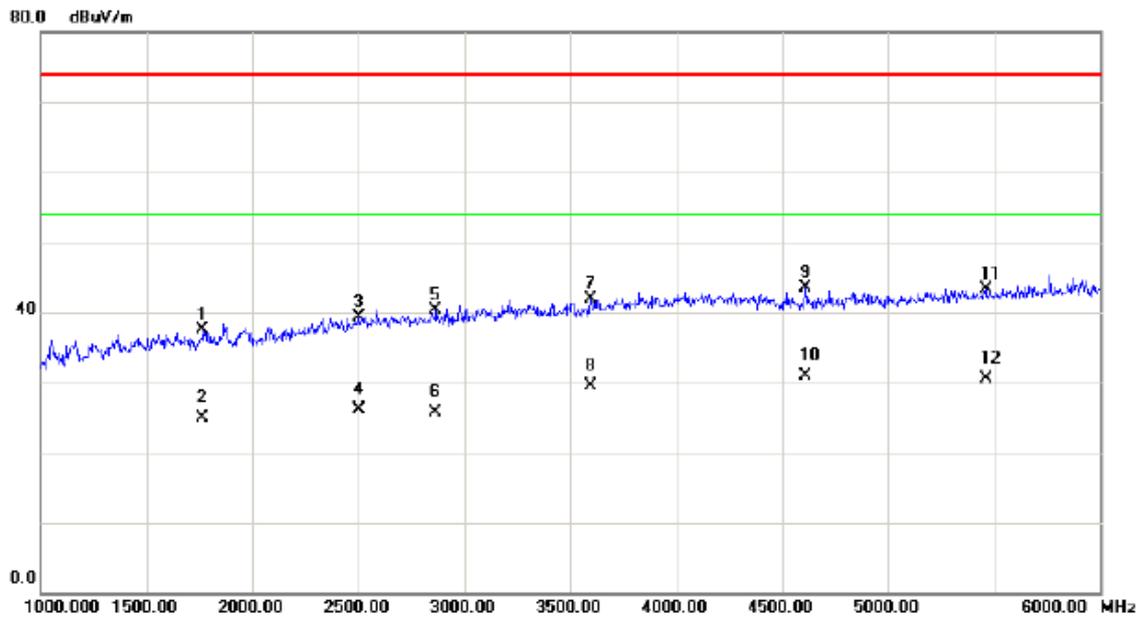

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1765.000	40.43	-2.91	37.52	74.00	-36.48	peak	
2		1765.000	27.85	-2.91	24.94	54.00	-29.06	AVG	
3		2500.000	39.18	0.08	39.26	74.00	-34.74	peak	
4		2500.000	26.07	0.08	26.15	54.00	-27.85	AVG	
5		2865.000	38.95	1.36	40.31	74.00	-33.69	peak	
6		2865.000	24.25	1.36	25.61	54.00	-28.39	AVG	
7		3595.000	38.25	3.69	41.94	74.00	-32.06	peak	
8		3595.000	25.82	3.69	29.51	54.00	-24.49	AVG	
9		4610.000	36.36	7.09	43.45	74.00	-30.55	peak	
10	*	4610.000	23.83	7.09	30.92	54.00	-23.08	AVG	
11		5460.000	34.31	9.02	43.33	74.00	-30.67	peak	
12		5460.000	21.56	9.02	30.58	54.00	-23.42	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


Horizontal

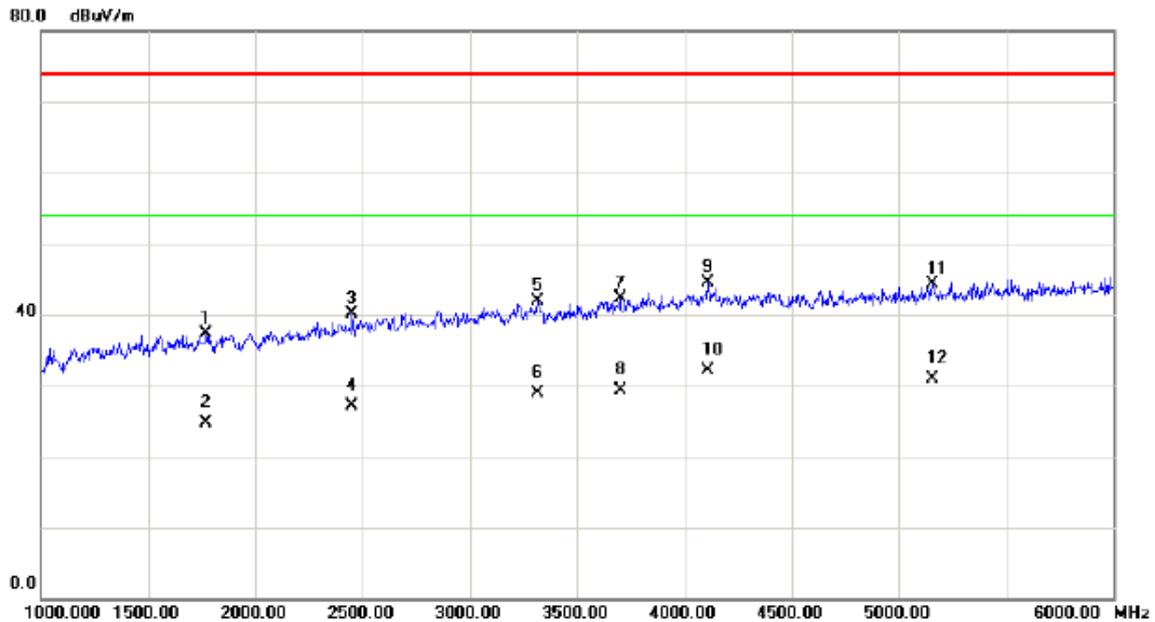

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1770.000	40.20	-2.88	37.32	74.00	-36.68	peak	
2		1770.000	27.51	-2.88	24.63	54.00	-29.37	AVG	
3		2450.000	40.31	-0.11	40.20	74.00	-33.80	peak	
4		2450.000	27.19	-0.11	27.08	54.00	-26.92	AVG	
5		3315.000	39.27	2.57	41.84	74.00	-32.16	peak	
6		3315.000	26.37	2.57	28.94	54.00	-25.06	AVG	
7		3700.000	37.90	4.45	42.35	74.00	-31.65	peak	
8		3700.000	24.91	4.45	29.36	54.00	-24.64	AVG	
9		4110.000	37.77	6.69	44.46	74.00	-29.54	peak	
10	*	4110.000	25.40	6.69	32.09	54.00	-21.91	AVG	
11		5155.000	36.27	8.11	44.38	74.00	-29.62	peak	
12		5155.000	22.79	8.11	30.90	54.00	-23.10	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


Vertical

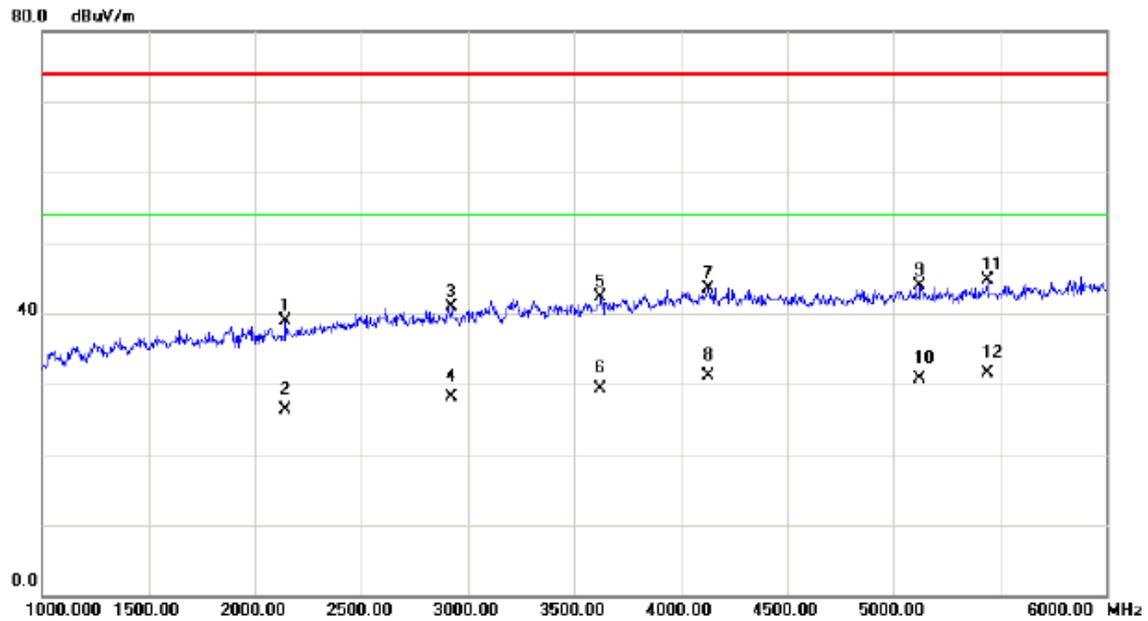

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2145.000	40.29	-1.31	38.98	74.00	-35.02	peak	
2		2145.000	27.56	-1.31	26.25	54.00	-27.75	AVG	
3		2925.000	39.27	1.58	40.85	74.00	-33.15	peak	
4		2925.000	26.43	1.58	28.01	54.00	-25.99	AVG	
5		3625.000	38.47	3.90	42.37	74.00	-31.63	peak	
6		3625.000	25.42	3.90	29.32	54.00	-24.68	AVG	
7		4130.000	36.90	6.70	43.60	74.00	-30.40	peak	
8		4130.000	24.39	6.70	31.09	54.00	-22.91	AVG	
9		5125.000	35.87	8.01	43.88	74.00	-30.12	peak	
10		5125.000	22.75	8.01	30.76	54.00	-23.24	AVG	
11		5440.000	35.67	8.96	44.63	74.00	-29.37	peak	
12	*	5440.000	22.63	8.96	31.59	54.00	-22.41	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


Horizontal

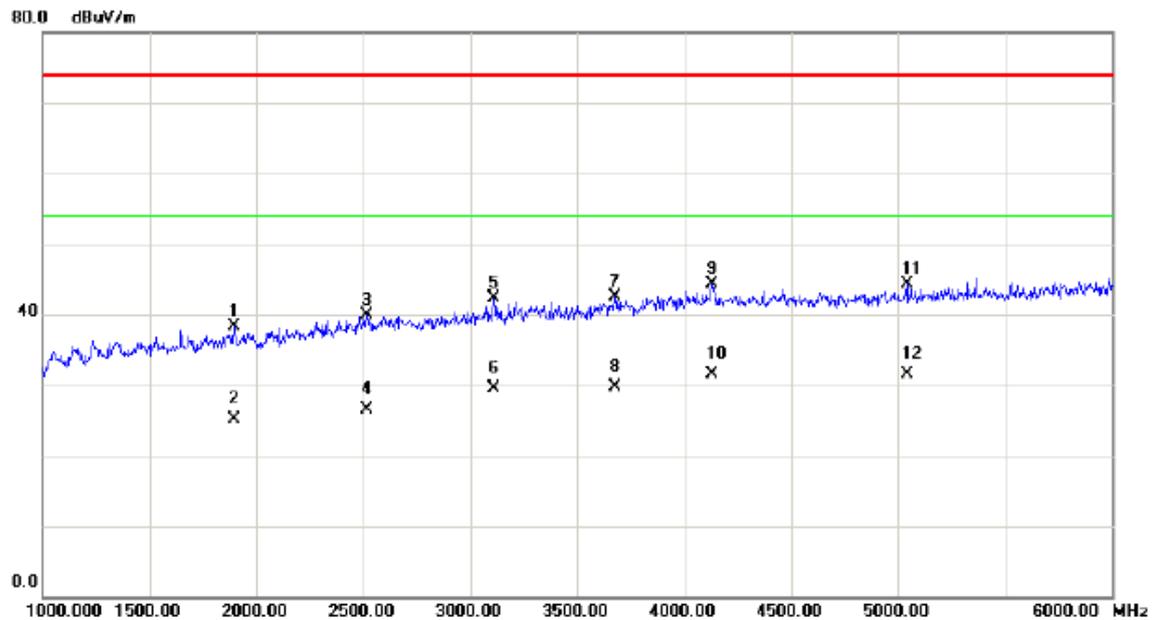

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1895.000	40.74	-2.35	38.39	74.00	-35.61	peak	
2		1895.000	27.48	-2.35	25.13	54.00	-28.87	AVG	
3		2515.000	39.71	0.13	39.84	74.00	-34.16	peak	
4		2515.000	26.32	0.13	26.45	54.00	-27.55	AVG	
5		3110.000	40.28	2.10	42.38	74.00	-31.62	peak	
6		3110.000	27.40	2.10	29.50	54.00	-24.50	AVG	
7		3675.000	38.22	4.27	42.49	74.00	-31.51	peak	
8		3675.000	25.38	4.27	29.65	54.00	-24.35	AVG	
9		4130.000	37.60	6.70	44.30	74.00	-29.70	peak	
10	*	4130.000	24.90	6.70	31.60	54.00	-22.40	AVG	
11		5040.000	36.62	7.76	44.38	74.00	-29.62	peak	
12		5040.000	23.66	7.76	31.42	54.00	-22.58	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


Vertical

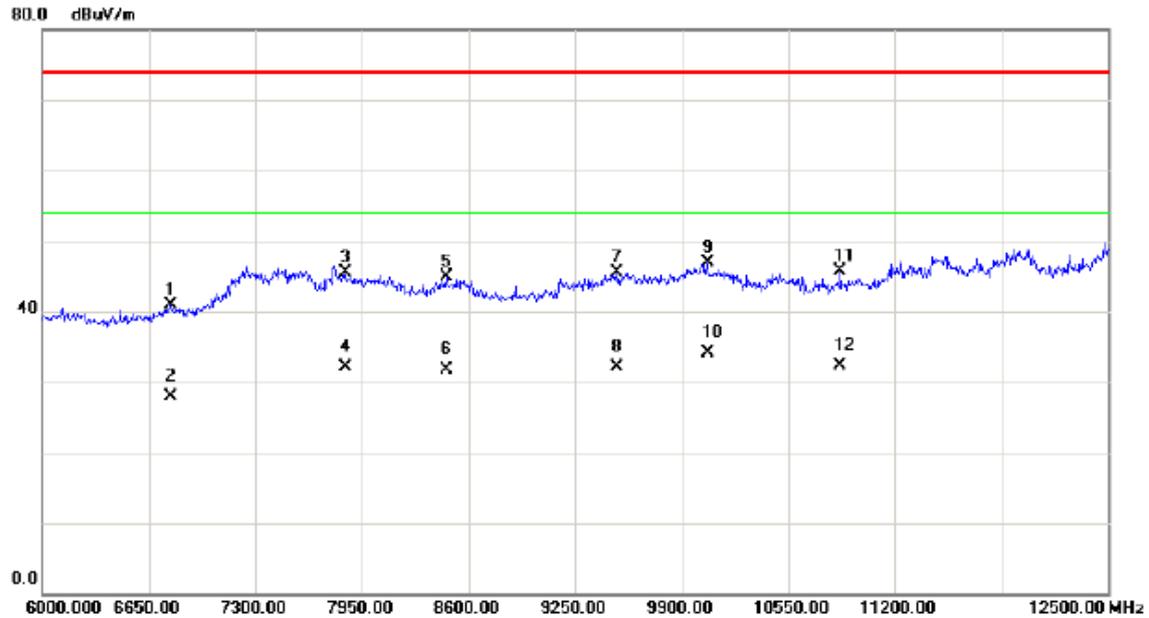

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6780.000	27.84	13.01	40.85	74.00	-33.15	peak	
2		6780.000	14.90	13.01	27.91	54.00	-26.09	AVG	
3		7846.000	29.46	16.06	45.52	74.00	-28.48	peak	
4		7846.000	16.11	16.06	32.17	54.00	-21.83	AVG	
5		8463.500	29.51	15.44	44.95	74.00	-29.05	peak	
6		8463.500	16.18	15.44	31.62	54.00	-22.38	AVG	
7		9503.500	30.34	15.17	45.51	74.00	-28.49	peak	
8		9503.500	16.86	15.17	32.03	54.00	-21.97	AVG	
9		10056.000	30.99	15.83	46.82	74.00	-27.18	peak	
10	*	10056.000	18.24	15.83	34.07	54.00	-19.93	AVG	
11		10868.500	27.03	18.71	45.74	74.00	-28.26	peak	
12		10868.500	13.52	18.71	32.23	54.00	-21.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


Horizontal

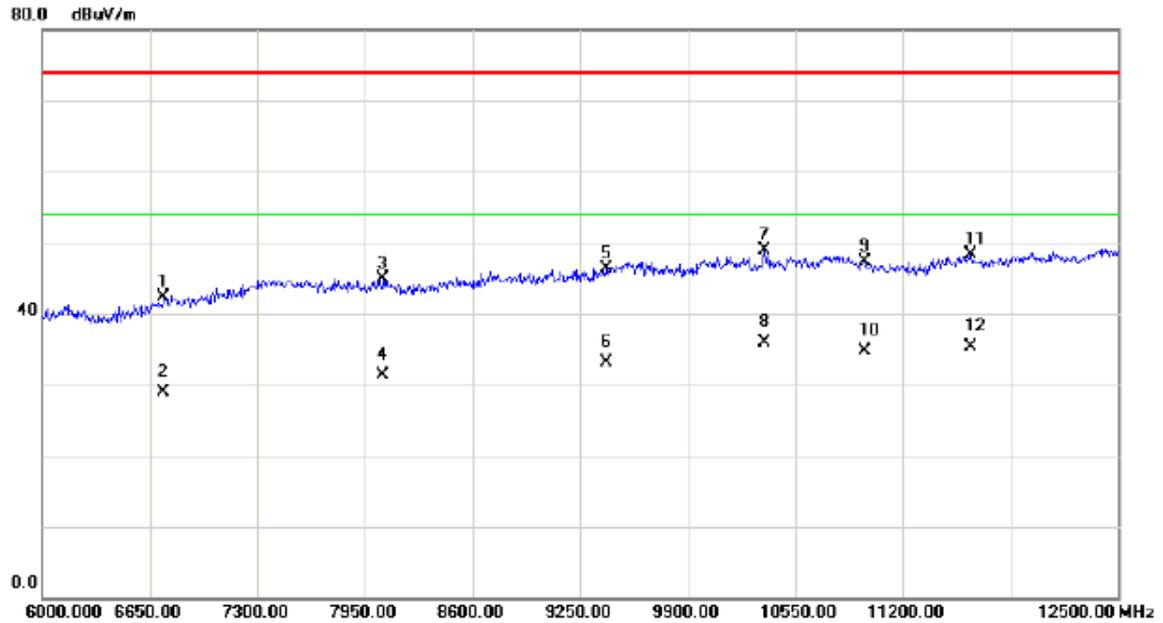

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		6734.500	29.47	12.83	42.30	74.00	-31.70	peak	
2		6734.500	16.16	12.83	28.99	54.00	-25.01	AVG	
3		8060.500	28.96	16.01	44.97	74.00	-29.03	peak	
4		8060.500	15.31	16.01	31.32	54.00	-22.68	AVG	
5		9406.000	31.00	15.36	46.36	74.00	-27.64	peak	
6		9406.000	17.68	15.36	33.04	54.00	-20.96	AVG	
7		10361.50	34.35	14.56	48.91	74.00	-25.09	peak	
8	*	10361.50	21.40	14.56	35.96	54.00	-18.04	AVG	
9		10966.00	27.39	19.96	47.35	74.00	-26.65	peak	
10		10966.00	14.81	19.96	34.77	54.00	-19.23	AVG	
11		11609.50	27.40	20.83	48.23	74.00	-25.77	peak	
12		11609.50	14.49	20.83	35.32	54.00	-18.68	AVG	

Test Voltage:	DC 3.7V
Test Mode:	Playing+idle+speaker


Vertical

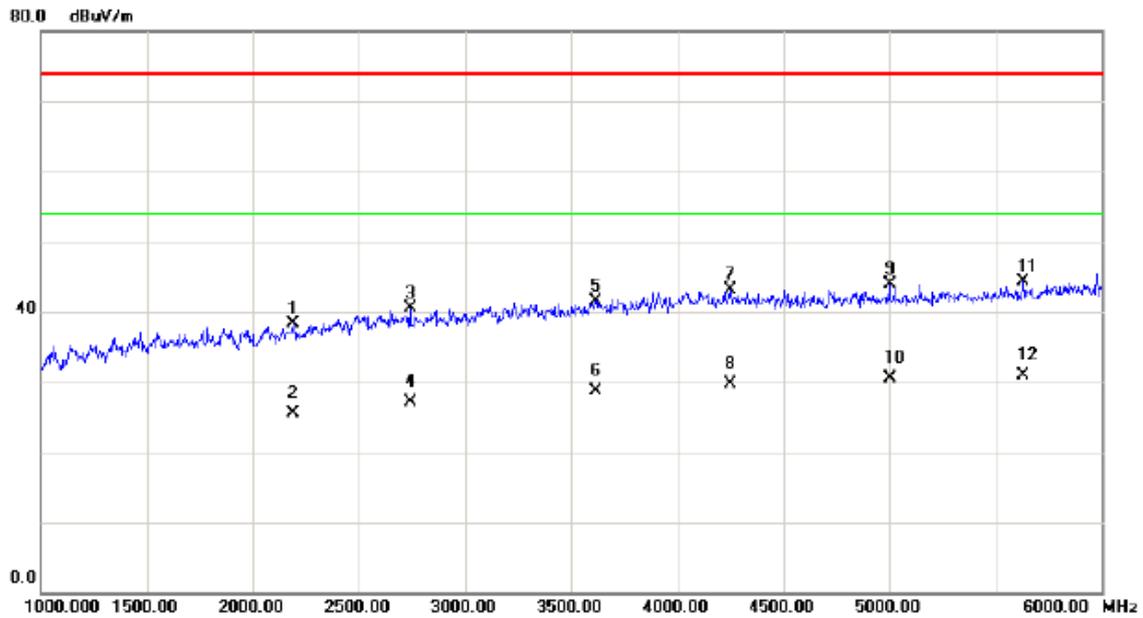

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2190.000	39.35	-1.13	38.22	74.00	-35.78	peak	
2		2190.000	26.54	-1.13	25.41	54.00	-28.59	AVG	
3		2740.000	39.59	0.92	40.51	74.00	-33.49	peak	
4		2740.000	26.15	0.92	27.07	54.00	-26.93	AVG	
5		3615.000	37.68	3.84	41.52	74.00	-32.48	peak	
6		3615.000	24.86	3.84	28.70	54.00	-25.30	AVG	
7		4250.000	36.43	6.77	43.20	74.00	-30.80	peak	
8		4250.000	22.95	6.77	29.72	54.00	-24.28	AVG	
9		5000.000	36.17	7.64	43.81	74.00	-30.19	peak	
10		5000.000	22.95	7.64	30.59	54.00	-23.41	AVG	
11		5630.000	35.02	9.30	44.32	74.00	-29.68	peak	
12	*	5630.000	21.59	9.30	30.89	54.00	-23.11	AVG	

Test Voltage:	DC 3.7V
Test Mode:	Playing+idle+speaker


Horizontal

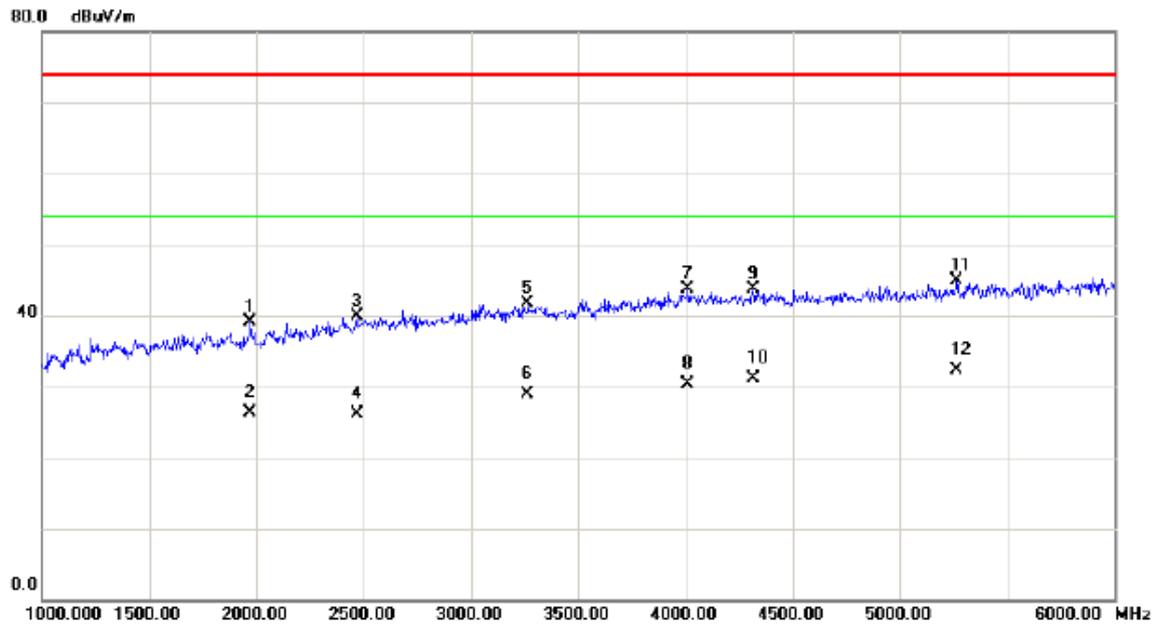

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1970.000	41.07	-2.01	39.06	74.00	-34.94	peak	
2		1970.000	28.41	-2.01	26.40	54.00	-27.60	AVG	
3		2470.000	39.86	-0.03	39.83	74.00	-34.17	peak	
4		2470.000	26.04	-0.03	26.01	54.00	-27.99	AVG	
5		3265.000	39.28	2.46	41.74	74.00	-32.26	peak	
6		3265.000	26.53	2.46	28.99	54.00	-25.01	AVG	
7		4010.000	37.02	6.62	43.64	74.00	-30.36	peak	
8		4010.000	23.73	6.62	30.35	54.00	-23.65	AVG	
9		4315.000	36.87	6.81	43.68	74.00	-30.32	peak	
10		4315.000	24.25	6.81	31.06	54.00	-22.94	AVG	
11		5265.000	36.54	8.44	44.98	74.00	-29.02	peak	
12	*	5265.000	23.79	8.44	32.23	54.00	-21.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Vertical

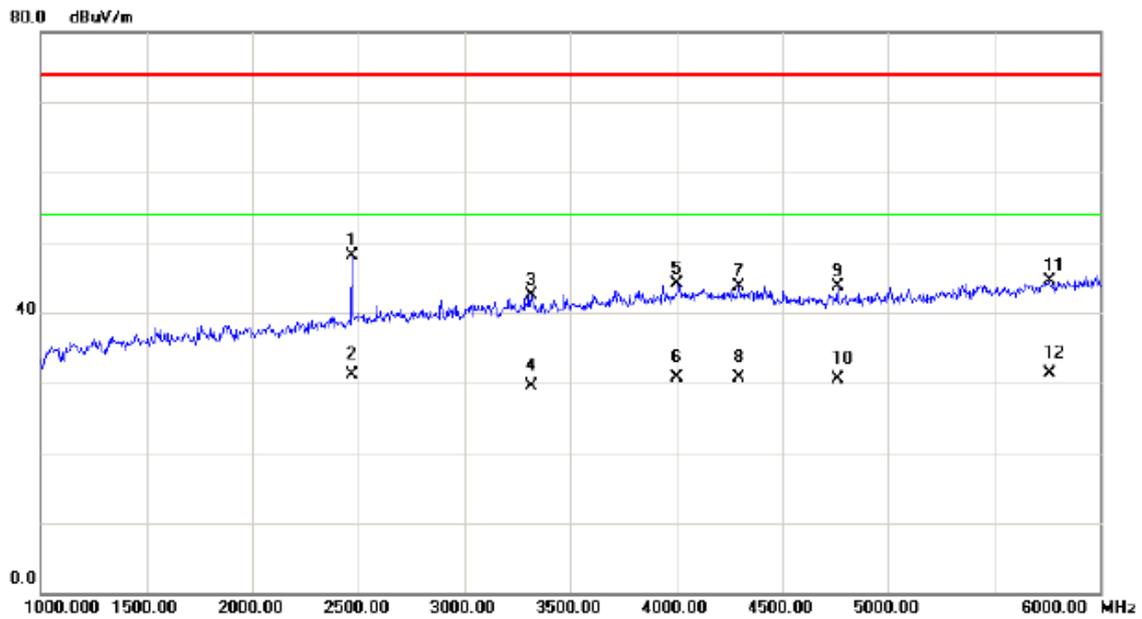

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2470.000	48.08	-0.03	48.05	74.00	-25.95	peak	
2		2470.000	31.15	-0.03	31.12	54.00	-22.88	AVG	
3		3315.000	39.88	2.57	42.45	74.00	-31.55	peak	
4		3315.000	26.99	2.57	29.56	54.00	-24.44	AVG	
5		4005.000	37.50	6.62	44.12	74.00	-29.88	peak	
6		4005.000	24.04	6.62	30.66	54.00	-23.34	AVG	
7		4295.000	37.00	6.80	43.80	74.00	-30.20	peak	
8		4295.000	23.93	6.80	30.73	54.00	-23.27	AVG	
9		4760.000	36.31	7.30	43.61	74.00	-30.39	peak	
10		4760.000	23.26	7.30	30.56	54.00	-23.44	AVG	
11		5760.000	35.01	9.46	44.47	74.00	-29.53	peak	
12	*	5760.000	21.83	9.46	31.29	54.00	-22.71	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Horizontal

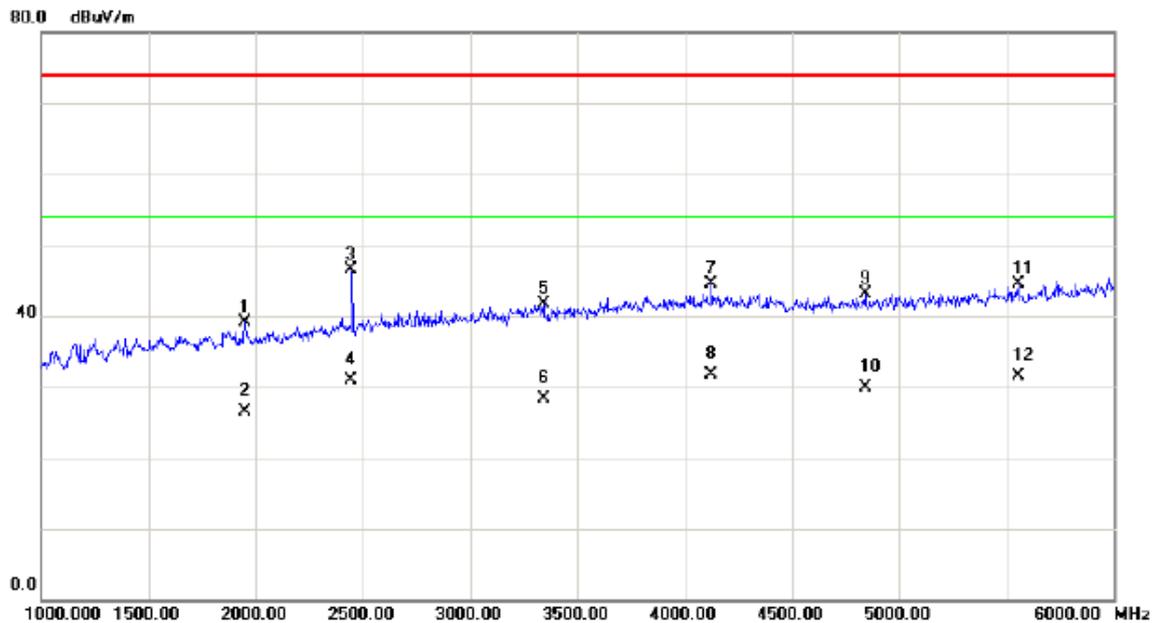

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1950.000	41.24	-2.10	39.14	74.00	-34.86	peak	
2		1950.000	28.61	-2.10	26.51	54.00	-27.49	AVG	
3		2445.000	46.66	-0.14	46.52	74.00	-27.48	peak	
4		2445.000	31.13	-0.14	30.99	54.00	-23.01	AVG	
5		3340.000	39.06	2.63	41.69	74.00	-32.31	peak	
6		3340.000	25.70	2.63	28.33	54.00	-25.67	AVG	
7		4125.000	37.79	6.71	44.50	74.00	-29.50	peak	
8	*	4125.000	24.94	6.71	31.65	54.00	-22.35	AVG	
9		4840.000	35.61	7.41	43.02	74.00	-30.98	peak	
10		4840.000	22.44	7.41	29.85	54.00	-24.15	AVG	
11		5555.000	35.20	9.21	44.41	74.00	-29.59	peak	
12		5555.000	22.34	9.21	31.55	54.00	-22.45	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Vertical

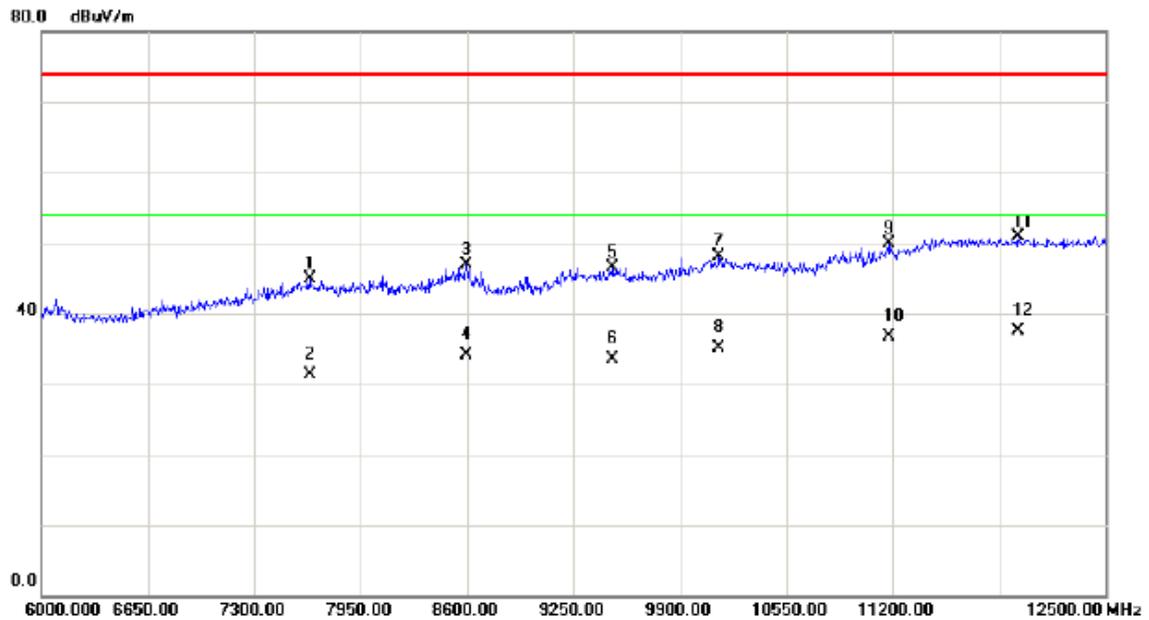

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7638.000	28.94	16.01	44.95	74.00	-29.05	peak	
2		7638.000	15.26	16.01	31.27	54.00	-22.73	AVG	
3		8593.500	31.30	15.54	46.84	74.00	-27.16	peak	
4		8593.500	18.64	15.54	34.18	54.00	-19.82	AVG	
5		9490.500	31.32	15.19	46.51	74.00	-27.49	peak	
6		9490.500	18.34	15.19	33.53	54.00	-20.47	AVG	
7		10140.500	32.63	15.48	48.11	74.00	-25.89	peak	
8		10140.500	19.63	15.48	35.11	54.00	-18.89	AVG	
9		11180.500	29.62	20.30	49.92	74.00	-24.08	peak	
10		11180.500	16.47	20.30	36.77	54.00	-17.23	AVG	
11		11967.000	27.72	23.11	50.83	74.00	-23.17	peak	
12	*	11967.000	14.33	23.11	37.44	54.00	-16.56	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Horizontal

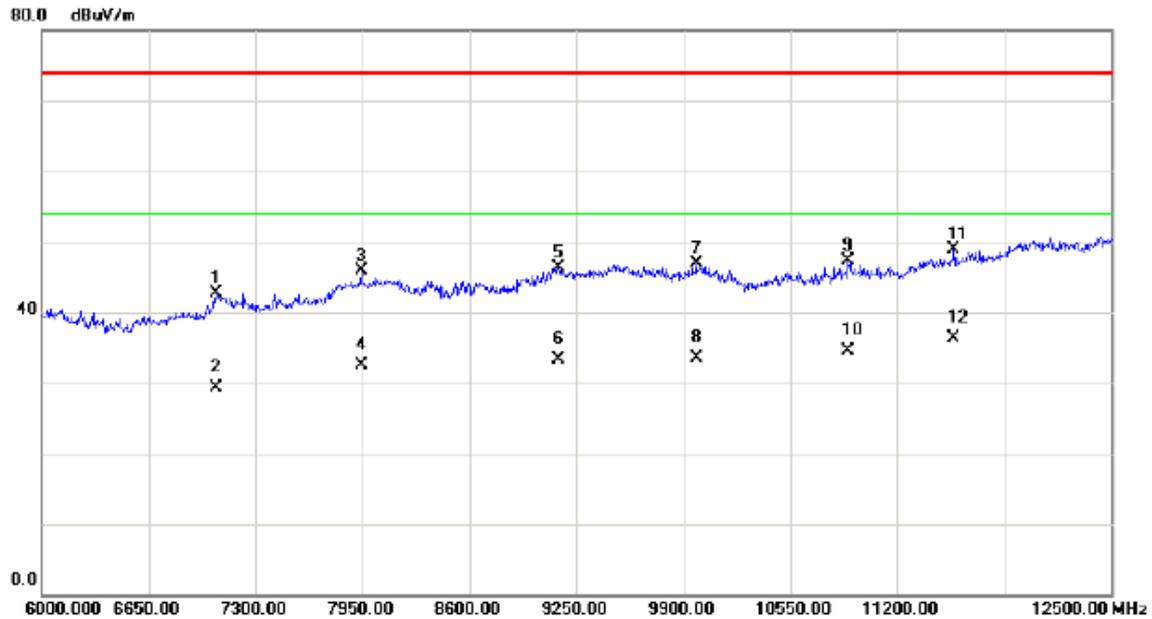

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7059.500	28.60	14.13	42.73	74.00	-31.27	peak	
2		7059.500	15.23	14.13	29.36	54.00	-24.64	AVG	
3		7943.500	29.78	16.07	45.85	74.00	-28.15	peak	
4		7943.500	16.47	16.07	32.54	54.00	-21.46	AVG	
5		9139.500	30.35	15.88	46.23	74.00	-27.77	peak	
6		9139.500	17.39	15.88	33.27	54.00	-20.73	AVG	
7		9978.000	30.78	16.03	46.81	74.00	-27.19	peak	
8		9978.000	17.42	16.03	33.45	54.00	-20.55	AVG	
9		10901.00	28.25	19.12	47.37	74.00	-26.63	peak	
10		10901.00	15.30	19.12	34.42	54.00	-19.58	AVG	
11		11544.50	28.47	20.42	48.89	74.00	-25.11	peak	
12	*	11544.50	15.91	20.42	36.33	54.00	-17.67	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Vertical

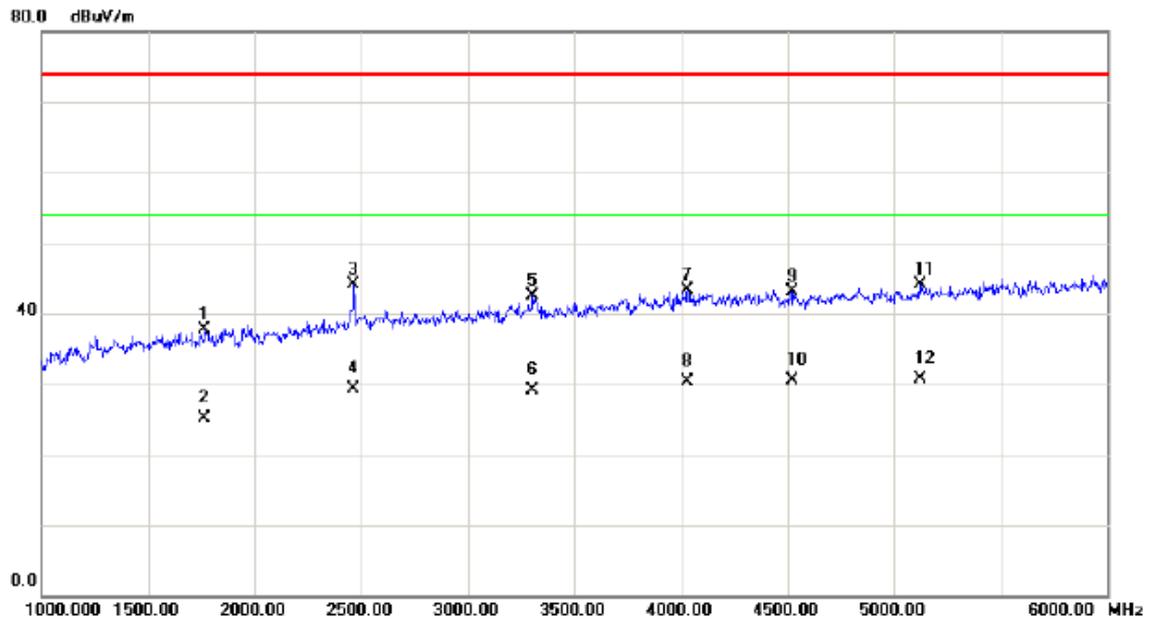

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1765.000	40.68	-2.91	37.77	74.00	-36.23	peak	
2		1765.000	27.92	-2.91	25.01	54.00	-28.99	AVG	
3		2465.000	44.09	-0.06	44.03	74.00	-29.97	peak	
4		2465.000	29.33	-0.06	29.27	54.00	-24.73	AVG	
5		3305.000	39.94	2.54	42.48	74.00	-31.52	peak	
6		3305.000	26.58	2.54	29.12	54.00	-24.88	AVG	
7		4030.000	36.58	6.64	43.22	74.00	-30.78	peak	
8		4030.000	23.74	6.64	30.38	54.00	-23.62	AVG	
9		4520.000	36.16	6.95	43.11	74.00	-30.89	peak	
10		4520.000	23.61	6.95	30.56	54.00	-23.44	AVG	
11		5120.000	36.04	7.99	44.03	74.00	-29.97	peak	
12	*	5120.000	22.81	7.99	30.80	54.00	-23.20	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Horizontal

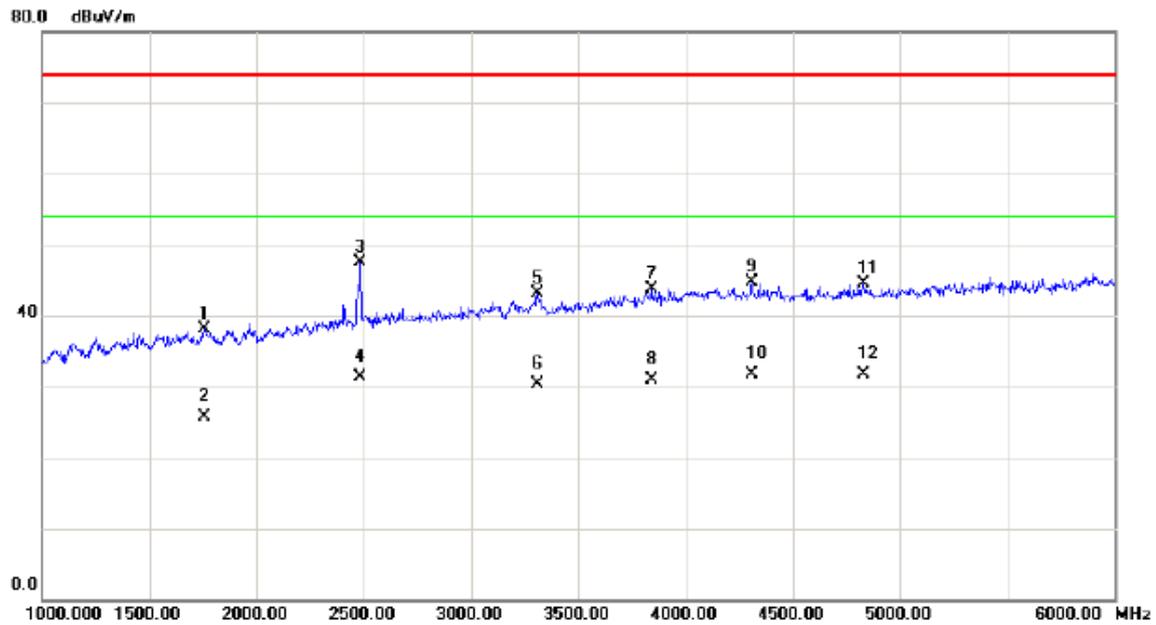

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1755.000	41.07	-2.96	38.11	74.00	-35.89	peak	
2		1755.000	28.65	-2.96	25.69	54.00	-28.31	AVG	
3		2485.000	47.42	0.02	47.44	74.00	-26.56	peak	
4		2485.000	31.20	0.02	31.22	54.00	-22.78	AVG	
5		3310.000	40.47	2.56	43.03	74.00	-30.97	peak	
6		3310.000	27.70	2.56	30.26	54.00	-23.74	AVG	
7		3840.000	38.22	5.46	43.68	74.00	-30.32	peak	
8		3840.000	25.40	5.46	30.86	54.00	-23.14	AVG	
9		4310.000	37.94	6.81	44.75	74.00	-29.25	peak	
10		4310.000	24.96	6.81	31.77	54.00	-22.23	AVG	
11		4830.000	37.18	7.40	44.58	74.00	-29.42	peak	
12	*	4830.000	24.39	7.40	31.79	54.00	-22.21	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Vertical

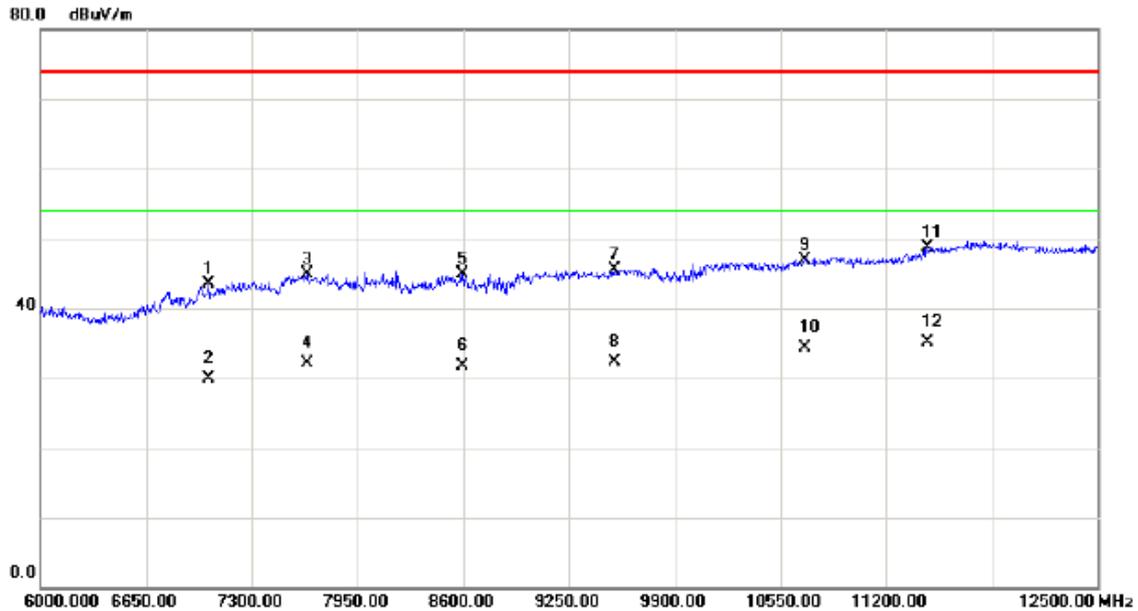

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7033.500	29.54	14.01	43.55	74.00	-30.45	peak	
2		7033.500	15.95	14.01	29.96	54.00	-24.04	AVG	
3		7638.000	28.92	16.01	44.93	74.00	-29.07	peak	
4		7638.000	16.10	16.01	32.11	54.00	-21.89	AVG	
5		8593.500	29.37	15.54	44.91	74.00	-29.09	peak	
6		8593.500	16.15	15.54	31.69	54.00	-22.31	AVG	
7		9529.500	30.31	15.22	45.53	74.00	-28.47	peak	
8		9529.500	17.00	15.22	32.22	54.00	-21.78	AVG	
9		10699.500	30.46	16.54	47.00	74.00	-27.00	peak	
10		10699.500	17.67	16.54	34.21	54.00	-19.79	AVG	
11		11453.500	28.61	20.16	48.77	74.00	-25.23	peak	
12	*	11453.500	14.95	20.16	35.11	54.00	-18.89	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Horizontal

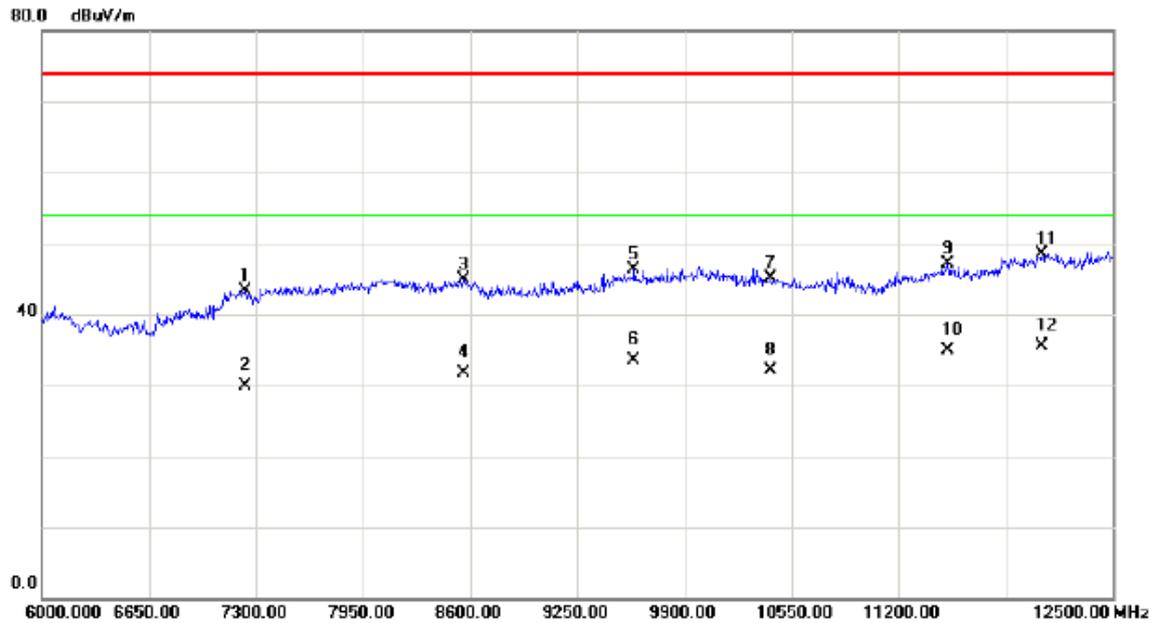

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7235.000	28.44	14.87	43.31	74.00	-30.69	peak	
2		7235.000	15.07	14.87	29.94	54.00	-24.06	AVG	
3		8561.000	29.51	15.49	45.00	74.00	-29.00	peak	
4		8561.000	16.22	15.49	31.71	54.00	-22.29	AVG	
5		9594.500	30.98	15.34	46.32	74.00	-27.68	peak	
6		9594.500	18.07	15.34	33.41	54.00	-20.59	AVG	
7		10426.50	30.87	14.29	45.16	74.00	-28.84	peak	
8		10426.50	17.78	14.29	32.07	54.00	-21.93	AVG	
9		11499.00	26.91	20.14	47.05	74.00	-26.95	peak	
10		11499.00	14.80	20.14	34.94	54.00	-19.06	AVG	
11		12071.00	25.90	22.51	48.41	74.00	-25.59	peak	
12	*	12071.00	12.94	22.51	35.45	54.00	-18.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


Vertical

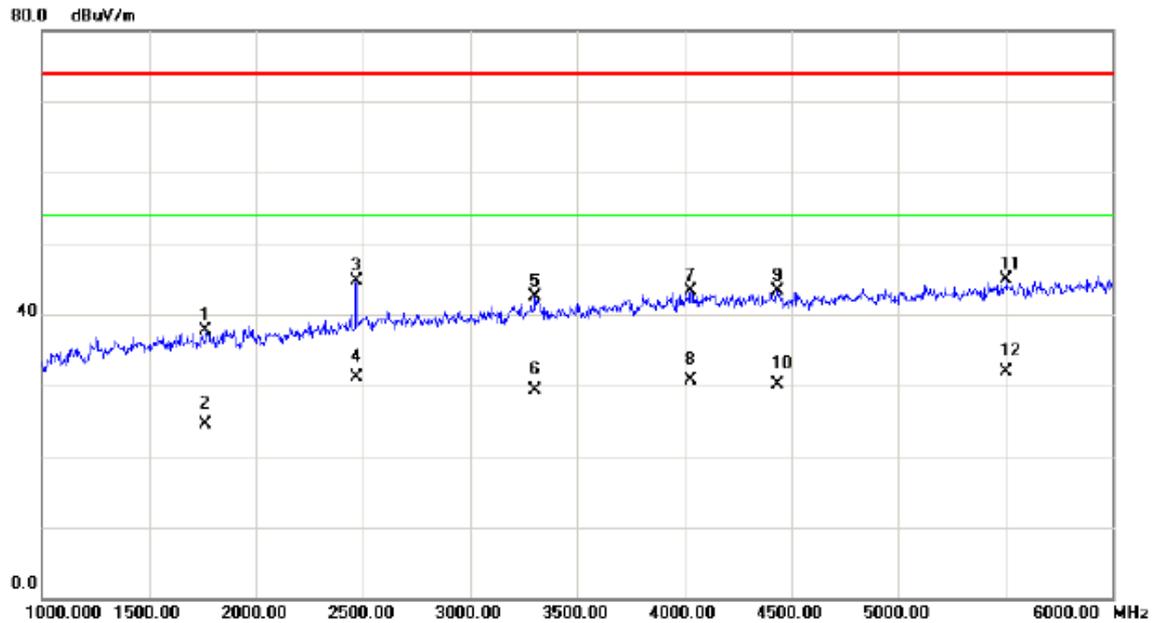

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1765.000	40.68	-2.91	37.77	74.00	-36.23	peak	
2		1765.000	27.45	-2.91	24.54	54.00	-29.46	AVG	
3		2470.000	44.80	-0.03	44.77	74.00	-29.23	peak	
4		2470.000	31.15	-0.03	31.12	54.00	-22.88	AVG	
5		3305.000	39.94	2.54	42.48	74.00	-31.52	peak	
6		3305.000	26.70	2.54	29.24	54.00	-24.76	AVG	
7		4030.000	36.58	6.64	43.22	74.00	-30.78	peak	
8		4030.000	24.10	6.64	30.74	54.00	-23.26	AVG	
9		4435.000	36.47	6.88	43.35	74.00	-30.65	peak	
10		4435.000	23.14	6.88	30.02	54.00	-23.98	AVG	
11		5505.000	35.66	9.15	44.81	74.00	-29.19	peak	
12	*	5505.000	22.78	9.15	31.93	54.00	-22.07	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


Horizontal

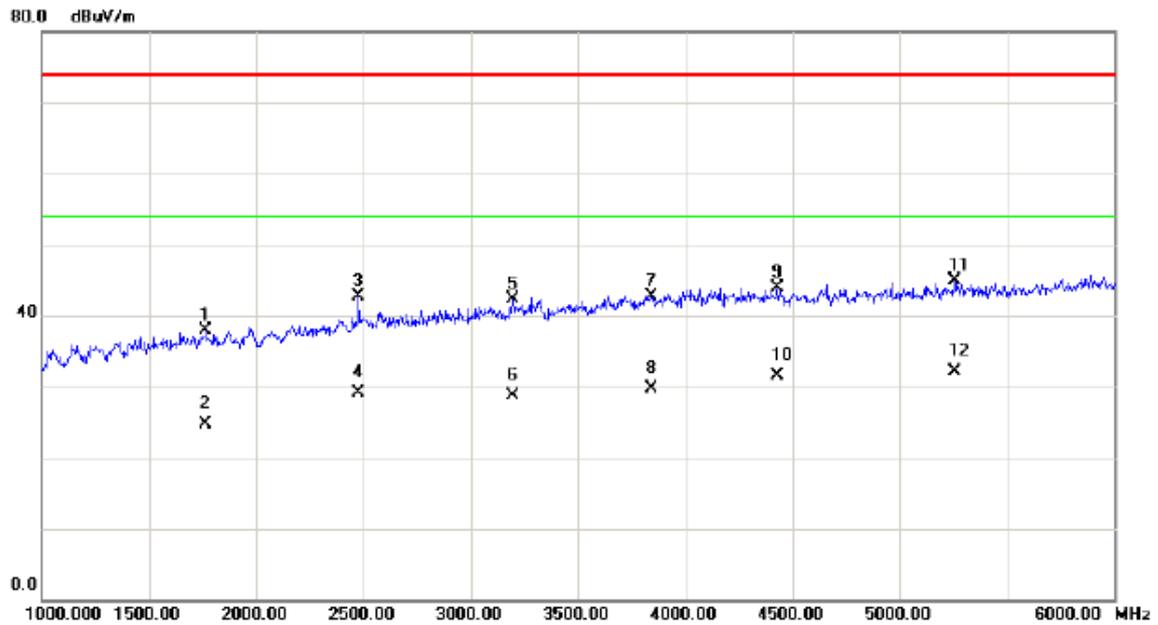

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1765.000	40.86	-2.91	37.95	74.00	-36.05	peak	
2	1765.000	27.57	-2.91	24.66	54.00	-29.34	AVG	
3	2475.000	42.71	-0.02	42.69	74.00	-31.31	peak	
4	2475.000	29.06	-0.02	29.04	54.00	-24.96	AVG	
5	3195.000	40.05	2.30	42.35	74.00	-31.65	peak	
6	3195.000	26.46	2.30	28.76	54.00	-25.24	AVG	
7	3840.000	37.31	5.46	42.77	74.00	-31.23	peak	
8	3840.000	24.24	5.46	29.70	54.00	-24.30	AVG	
9	4430.000	36.93	6.88	43.81	74.00	-30.19	peak	
10	4430.000	24.56	6.88	31.44	54.00	-22.56	AVG	
11	5255.000	36.52	8.41	44.93	74.00	-29.07	peak	
12 *	5255.000	23.77	8.41	32.18	54.00	-21.82	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


Vertical

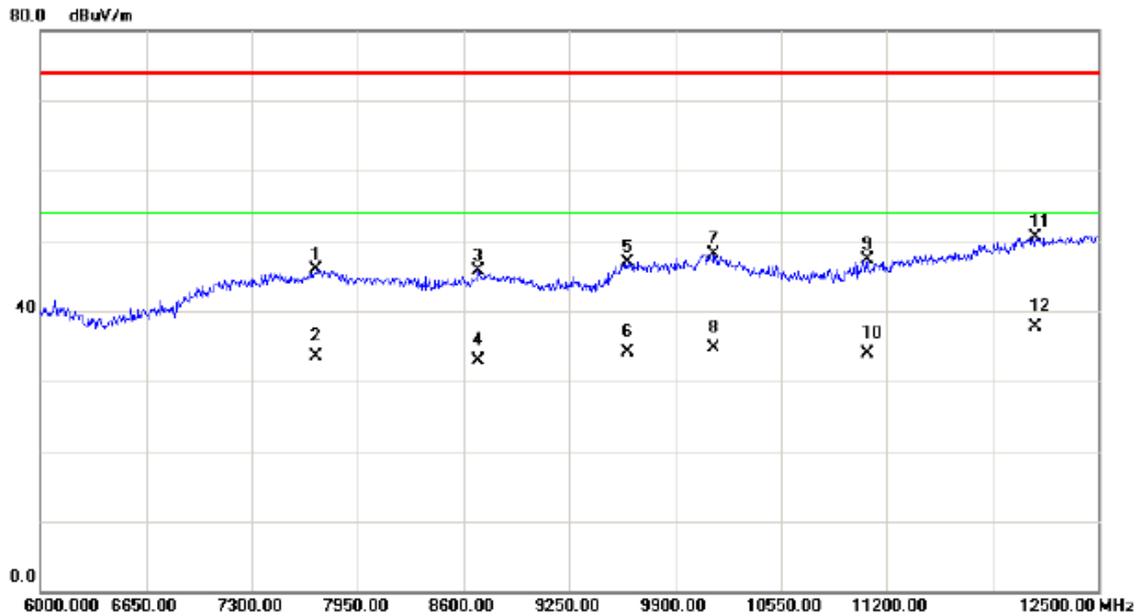

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7690.000	29.81	16.02	45.83	74.00	-28.17	peak	
2		7690.000	17.40	16.02	33.42	54.00	-20.58	AVG	
3		8691.000	30.12	15.68	45.80	74.00	-28.20	peak	
4		8691.000	17.17	15.68	32.85	54.00	-21.15	AVG	
5		9607.500	31.61	15.36	46.97	74.00	-27.03	peak	
6		9607.500	18.82	15.36	34.18	54.00	-19.82	AVG	
7		10140.50	32.63	15.48	48.11	74.00	-25.89	peak	
8		10140.50	19.13	15.48	34.61	54.00	-19.39	AVG	
9		11083.00	27.01	20.35	47.36	74.00	-26.64	peak	
10		11083.00	13.53	20.35	33.88	54.00	-20.12	AVG	
11		12110.00	28.35	22.08	50.43	74.00	-23.57	peak	
12	*	12110.00	15.53	22.08	37.61	54.00	-16.39	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


Horizontal

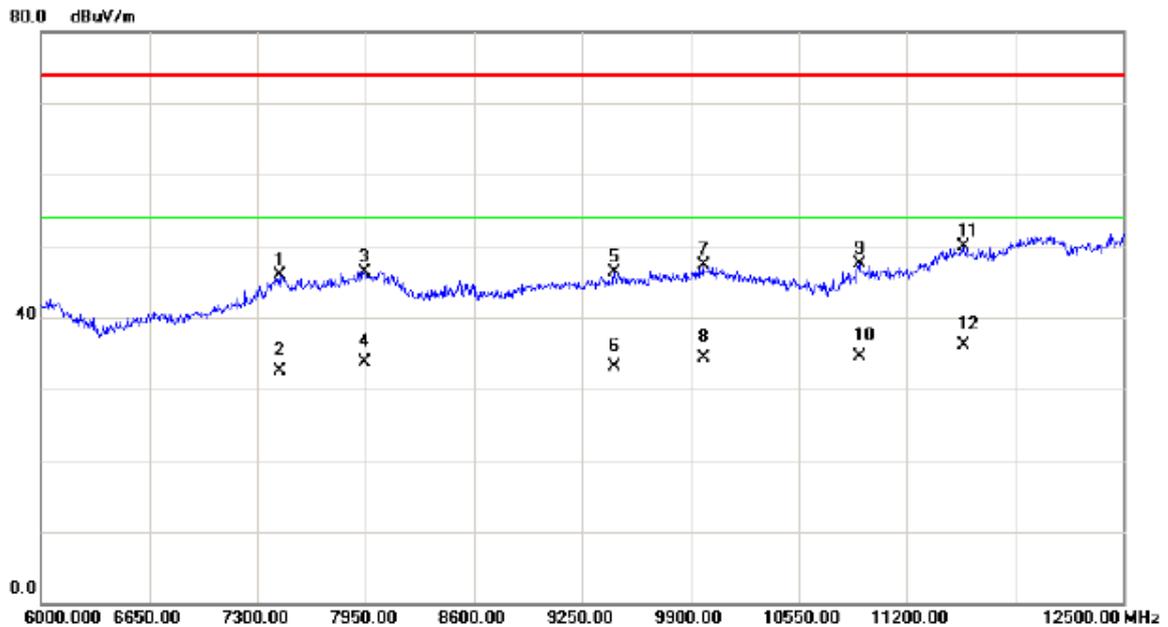

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7430.000	30.18	15.69	45.87	74.00	-28.13	peak	
2		7430.000	16.77	15.69	32.46	54.00	-21.54	AVG	
3		7943.500	30.28	16.07	46.35	74.00	-27.65	peak	
4		7943.500	17.56	16.07	33.63	54.00	-20.37	AVG	
5		9445.000	31.02	15.27	46.29	74.00	-27.71	peak	
6		9445.000	17.81	15.27	33.08	54.00	-20.92	AVG	
7		9978.000	31.28	16.03	47.31	74.00	-26.69	peak	
8		9978.000	18.18	16.03	34.21	54.00	-19.79	AVG	
9		10914.000	28.27	19.28	47.55	74.00	-26.45	peak	
10		10914.000	15.14	19.28	34.42	54.00	-19.58	AVG	
11		11544.500	29.47	20.42	49.89	74.00	-24.11	peak	
12	*	11544.500	15.63	20.42	36.05	54.00	-17.95	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug)


Vertical

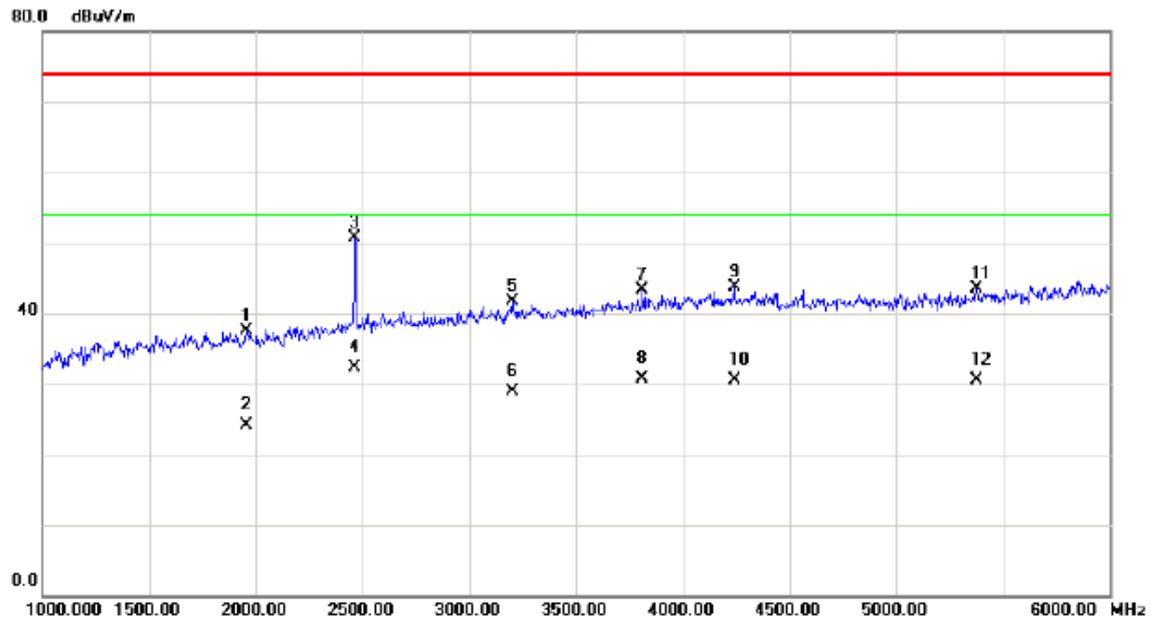

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1955.000	39.49	-2.08	37.41	74.00	-36.59	peak	
2		1955.000	26.28	-2.08	24.20	54.00	-29.80	AVG	
3		2465.000	50.83	-0.06	50.77	74.00	-23.23	peak	
4	*	2465.000	32.33	-0.06	32.27	54.00	-21.73	AVG	
5		3200.000	39.36	2.31	41.67	74.00	-32.33	peak	
6		3200.000	26.65	2.31	28.96	54.00	-25.04	AVG	
7		3810.000	38.03	5.24	43.27	74.00	-30.73	peak	
8		3810.000	25.45	5.24	30.69	54.00	-23.31	AVG	
9		4240.000	36.87	6.77	43.64	74.00	-30.36	peak	
10		4240.000	23.77	6.77	30.54	54.00	-23.46	AVG	
11		5375.000	34.79	8.77	43.56	74.00	-30.44	peak	
12		5375.000	21.70	8.77	30.47	54.00	-23.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug)


Horizontal

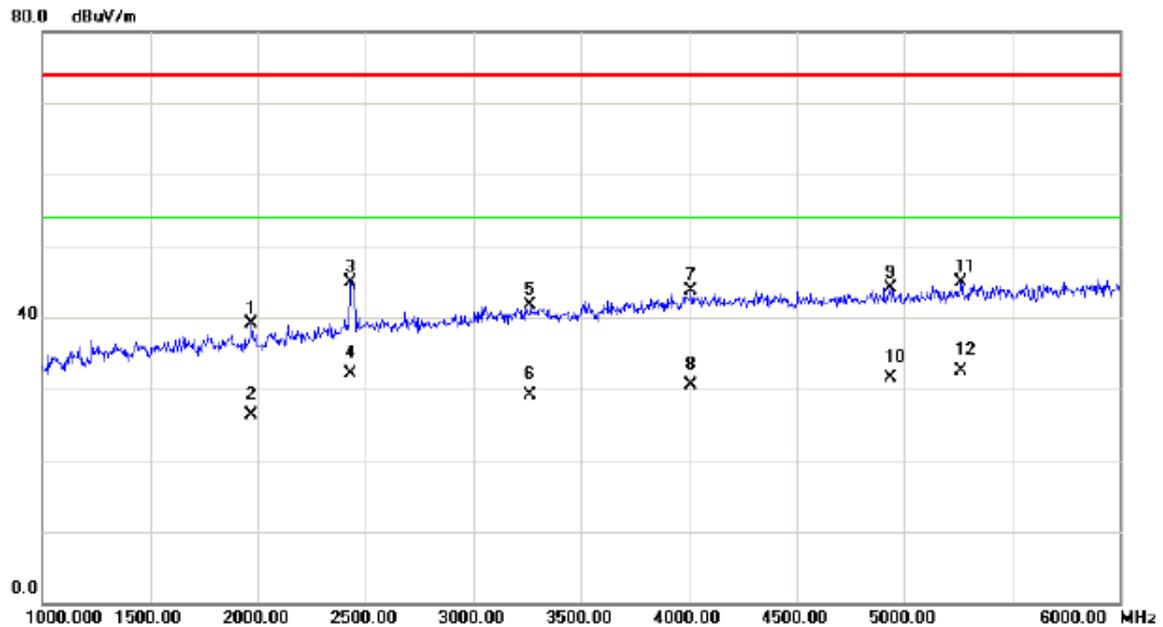

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1970.000	41.07	-2.01	39.06	74.00	-34.94	peak	
2		1970.000	28.41	-2.01	26.40	54.00	-27.60	AVG	
3		2430.000	45.08	-0.20	44.88	74.00	-29.12	peak	
4		2430.000	32.23	-0.20	32.03	54.00	-21.97	AVG	
5		3265.000	39.28	2.46	41.74	74.00	-32.26	peak	
6		3265.000	26.67	2.46	29.13	54.00	-24.87	AVG	
7		4010.000	37.02	6.62	43.64	74.00	-30.36	peak	
8		4010.000	23.79	6.62	30.41	54.00	-23.59	AVG	
9		4935.000	36.55	7.55	44.10	74.00	-29.90	peak	
10		4935.000	23.96	7.55	31.51	54.00	-22.49	AVG	
11		5265.000	36.54	8.44	44.98	74.00	-29.02	peak	
12	*	5265.000	24.01	8.44	32.45	54.00	-21.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug)


Vertical

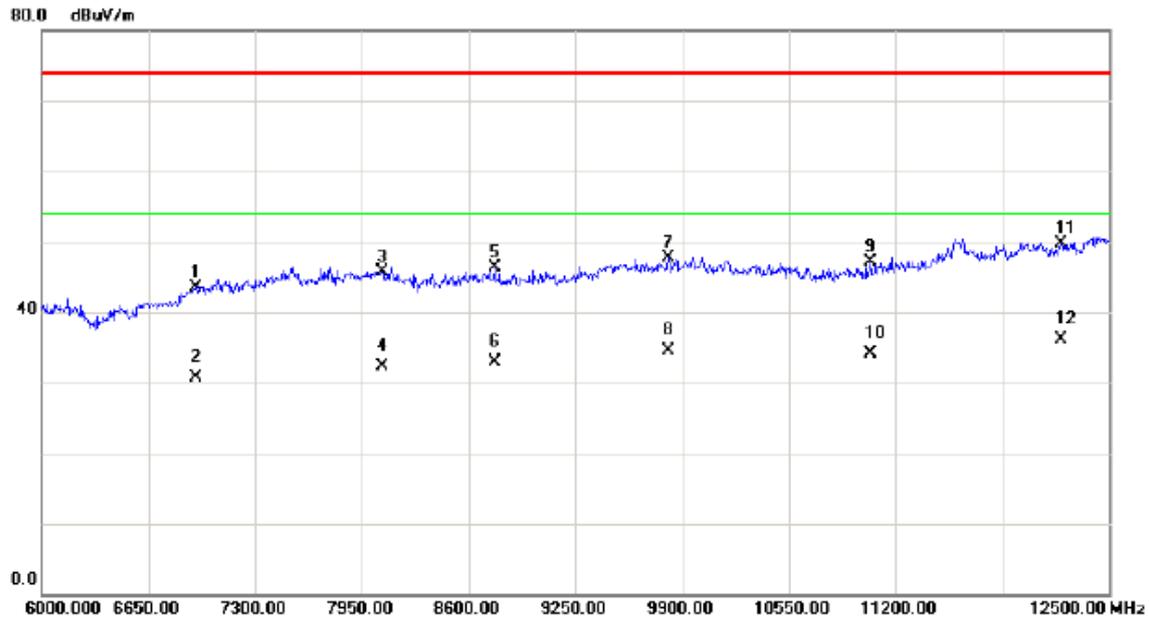

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6942.500	29.95	13.65	43.60	74.00	-30.40	peak	
2		6942.500	17.02	13.65	30.67	54.00	-23.33	AVG	
3		8073.500	29.78	15.99	45.77	74.00	-28.23	peak	
4		8073.500	16.34	15.99	32.33	54.00	-21.67	AVG	
5		8756.000	30.44	15.78	46.22	74.00	-27.78	peak	
6		8756.000	17.17	15.78	32.95	54.00	-21.05	AVG	
7		9815.500	31.97	15.73	47.70	74.00	-26.30	peak	
8		9815.500	18.87	15.73	34.60	54.00	-19.40	AVG	
9		11050.50	26.83	20.36	47.19	74.00	-26.81	peak	
10		11050.50	13.80	20.36	34.16	54.00	-19.84	AVG	
11		12207.50	28.78	20.98	49.76	74.00	-24.24	peak	
12	*	12207.50	15.15	20.98	36.13	54.00	-17.87	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug)


Horizontal

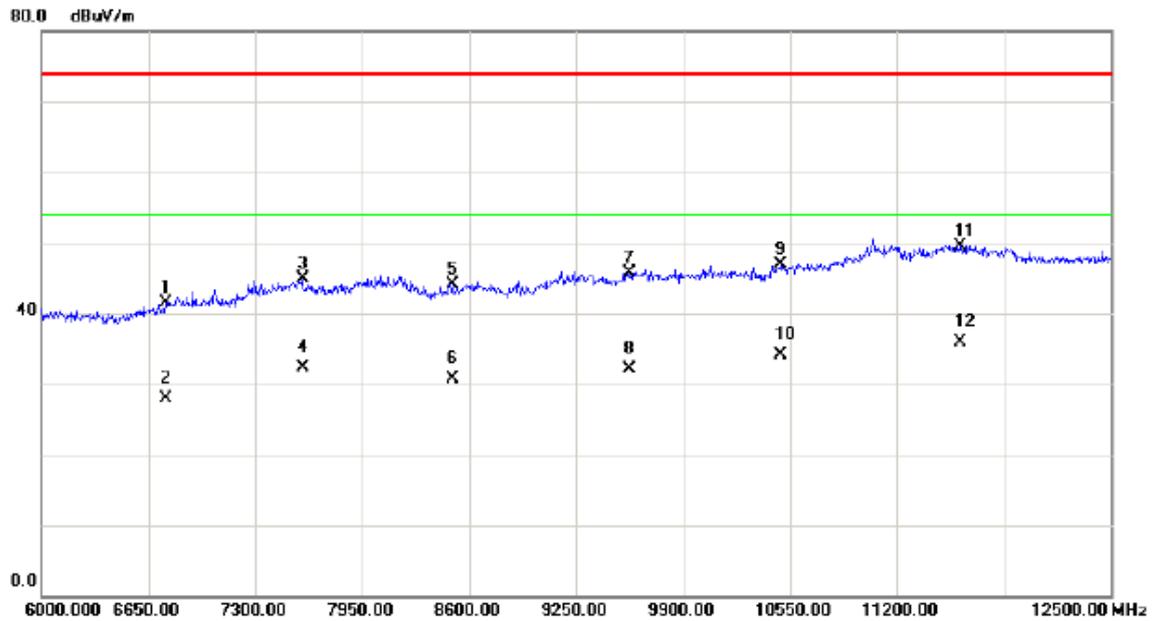

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6754.000	28.65	12.90	41.55	74.00	-32.45	peak	
2		6754.000	14.96	12.90	27.86	54.00	-26.14	AVG	
3		7586.000	28.84	16.01	44.85	74.00	-29.15	peak	
4		7586.000	16.33	16.01	32.34	54.00	-21.66	AVG	
5		8496.000	28.76	15.40	44.16	74.00	-29.84	peak	
6		8496.000	15.22	15.40	30.62	54.00	-23.38	AVG	
7		9575.000	30.36	15.30	45.66	74.00	-28.34	peak	
8		9575.000	16.79	15.30	32.09	54.00	-21.91	AVG	
9		10491.50	32.94	14.02	46.96	74.00	-27.04	peak	
10		10491.50	20.09	14.02	34.11	54.00	-19.89	AVG	
11		11583.50	28.82	20.67	49.49	74.00	-24.51	peak	
12	*	11583.50	15.32	20.67	35.99	54.00	-18.01	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU(EU Plug)


Vertical

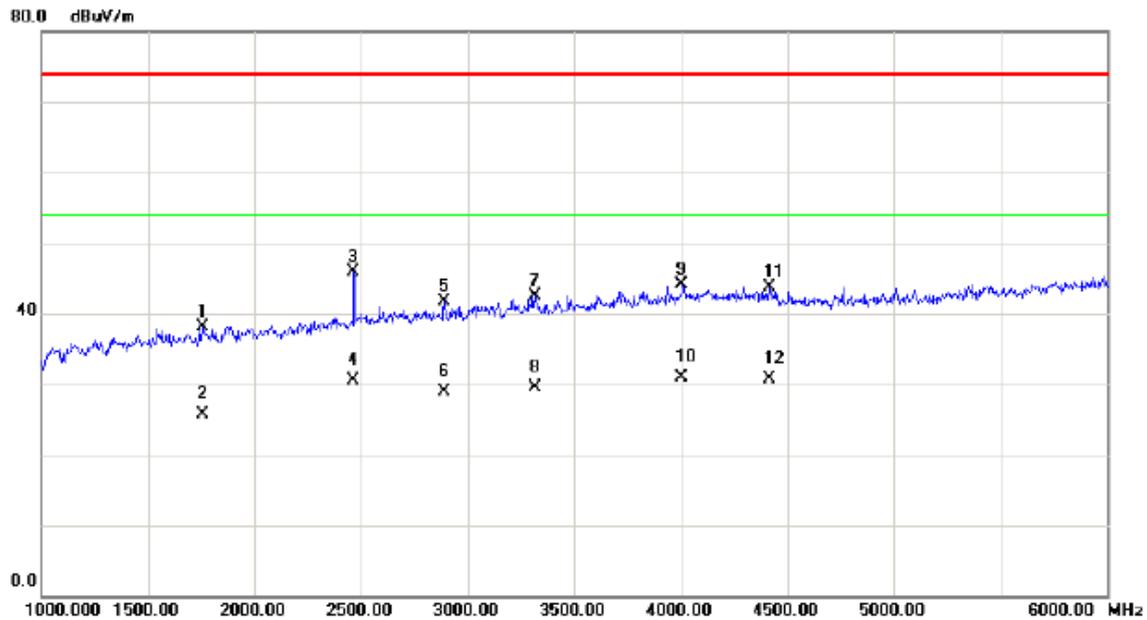

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1755.000	41.02	-2.96	38.06	74.00	-35.94	peak	
2		1755.000	28.65	-2.96	25.69	54.00	-28.31	AVG	
3		2465.000	45.87	-0.06	45.81	74.00	-28.19	peak	
4		2465.000	30.53	-0.06	30.47	54.00	-23.53	AVG	
5		2890.000	40.30	1.46	41.76	74.00	-32.24	peak	
6		2890.000	27.54	1.46	29.00	54.00	-25.00	AVG	
7		3315.000	39.88	2.57	42.45	74.00	-31.55	peak	
8		3315.000	27.02	2.57	29.59	54.00	-24.41	AVG	
9		4005.000	37.50	6.62	44.12	74.00	-29.88	peak	
10	*	4005.000	24.23	6.62	30.85	54.00	-23.15	AVG	
11		4415.000	36.83	6.86	43.69	74.00	-30.31	peak	
12		4415.000	23.92	6.86	30.78	54.00	-23.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU(EU Plug)


Horizontal

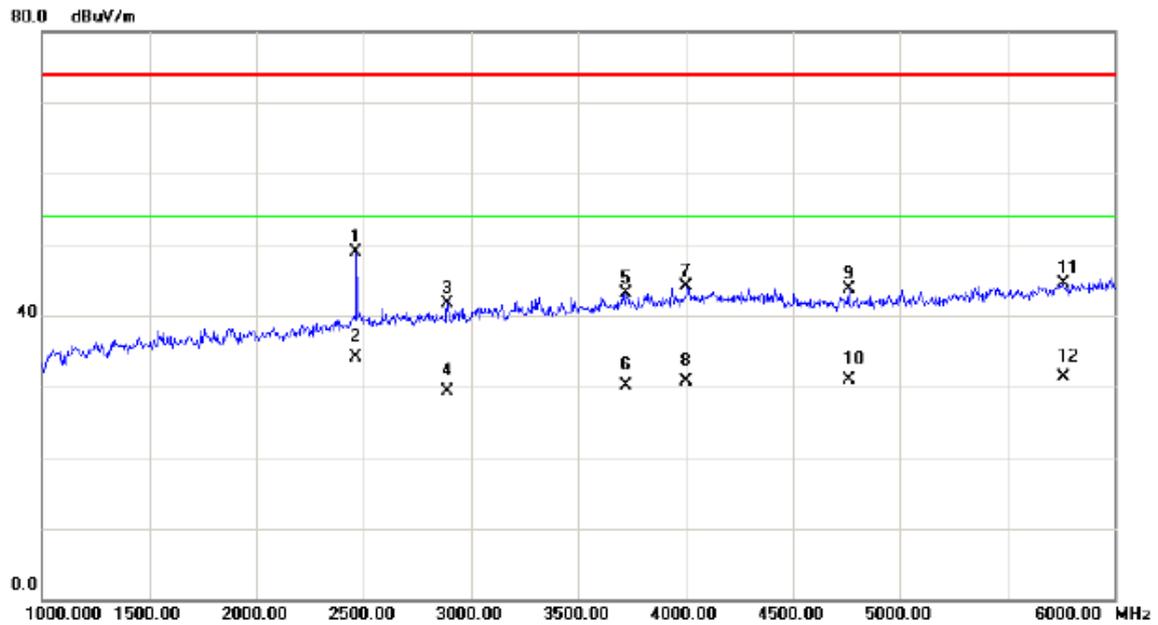

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2465.000	48.87	-0.06	48.81	74.00	-25.19	peak	
2	*	2465.000	34.15	-0.06	34.09	54.00	-19.91	AVG	
3		2890.000	40.30	1.46	41.76	74.00	-32.24	peak	
4		2890.000	27.94	1.46	29.40	54.00	-24.60	AVG	
5		3725.000	38.43	4.63	43.06	74.00	-30.94	peak	
6		3725.000	25.54	4.63	30.17	54.00	-23.83	AVG	
7		4005.000	37.50	6.62	44.12	74.00	-29.88	peak	
8		4005.000	24.03	6.62	30.65	54.00	-23.35	AVG	
9		4760.000	36.31	7.30	43.61	74.00	-30.39	peak	
10		4760.000	23.68	7.30	30.98	54.00	-23.02	AVG	
11		5760.000	35.01	9.46	44.47	74.00	-29.53	peak	
12		5760.000	21.84	9.46	31.30	54.00	-22.70	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU(EU Plug)


Vertical

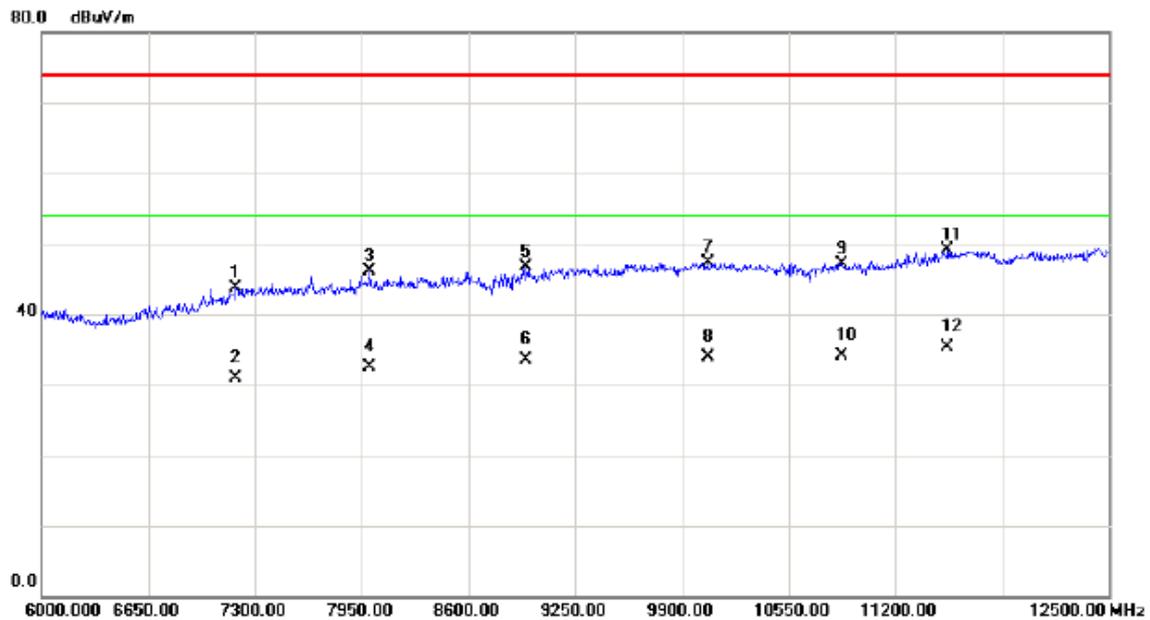

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7183.000	29.10	14.65	43.75	74.00	-30.25	peak	
2		7183.000	16.24	14.65	30.89	54.00	-23.11	AVG	
3		7995.500	29.99	16.09	46.08	74.00	-27.92	peak	
4		7995.500	16.38	16.09	32.47	54.00	-21.53	AVG	
5		8951.000	30.57	16.08	46.65	74.00	-27.35	peak	
6		8951.000	17.44	16.08	33.52	54.00	-20.48	AVG	
7		10056.000	31.56	15.83	47.39	74.00	-26.61	peak	
8		10056.000	17.99	15.83	33.82	54.00	-20.18	AVG	
9		10875.000	28.40	18.79	47.19	74.00	-26.81	peak	
10		10875.000	15.36	18.79	34.15	54.00	-19.85	AVG	
11		11518.500	28.77	20.26	49.03	74.00	-24.97	peak	
12	*	11518.500	15.02	20.26	35.28	54.00	-18.72	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU(EU Plug)


Horizontal

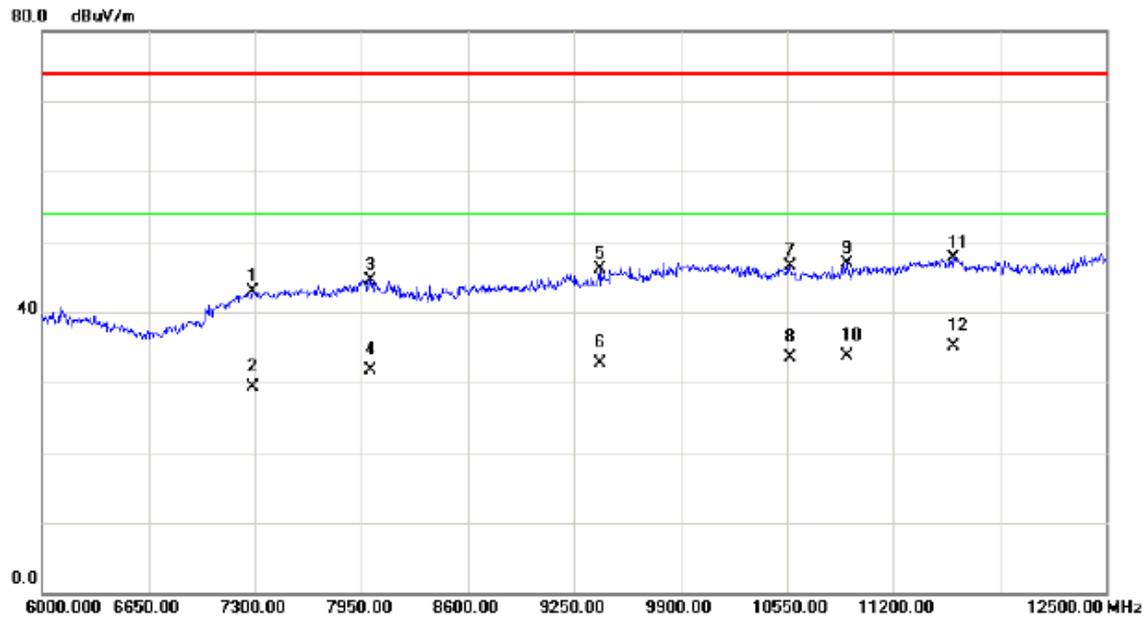

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7287.000	27.92	15.08	43.00	74.00	-31.00	peak	
2		7287.000	14.26	15.08	29.34	54.00	-24.66	AVG	
3		8008.500	28.44	16.08	44.52	74.00	-29.48	peak	
4		8008.500	15.67	16.08	31.75	54.00	-22.25	AVG	
5		9406.000	30.80	15.36	46.16	74.00	-27.84	peak	
6		9406.000	17.31	15.36	32.67	54.00	-21.33	AVG	
7		10569.500	31.71	14.88	46.59	74.00	-27.41	peak	
8		10569.500	18.62	14.88	33.50	54.00	-20.50	AVG	
9		10920.500	27.57	19.37	46.94	74.00	-27.06	peak	
10		10920.500	14.32	19.37	33.69	54.00	-20.31	AVG	
11		11564.000	27.12	20.54	47.66	74.00	-26.34	peak	
12	*	11564.000	14.55	20.54	35.09	54.00	-18.91	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug)


Vertical

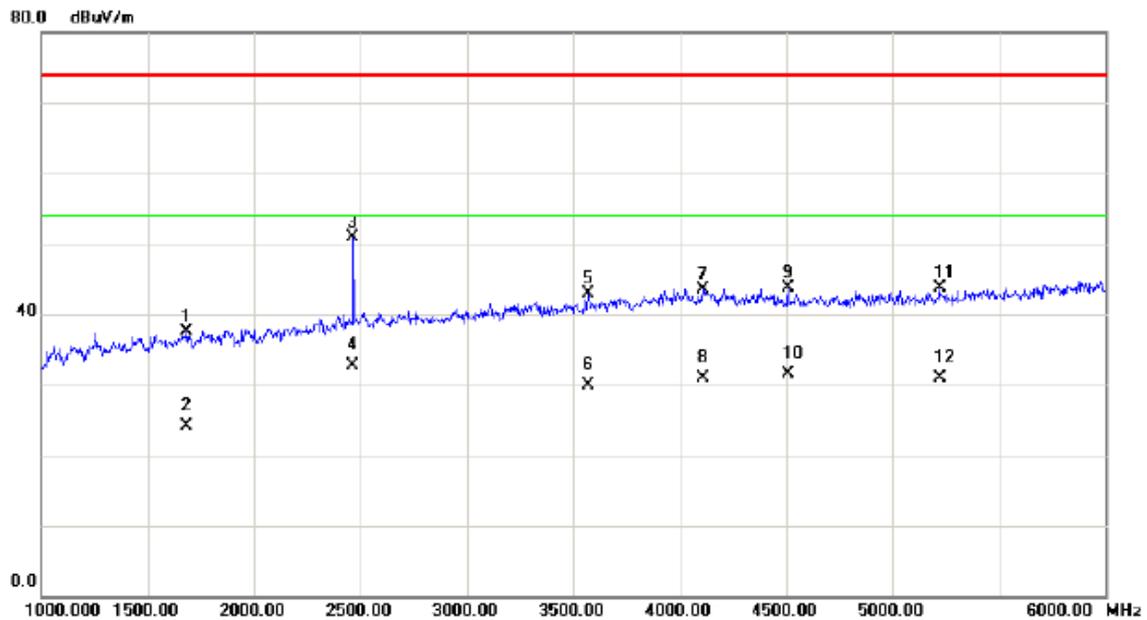

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1685.000	40.74	-3.26	37.48	74.00	-36.52	peak	
2		1685.000	27.30	-3.26	24.04	54.00	-29.96	AVG	
3		2465.000	50.89	-0.06	50.83	74.00	-23.17	peak	
4	*	2465.000	32.80	-0.06	32.74	54.00	-21.26	AVG	
5		3570.000	39.45	3.51	42.96	74.00	-31.04	peak	
6		3570.000	26.31	3.51	29.82	54.00	-24.18	AVG	
7		4110.000	36.90	6.69	43.59	74.00	-30.41	peak	
8		4110.000	24.17	6.69	30.86	54.00	-23.14	AVG	
9		4510.000	36.75	6.94	43.69	74.00	-30.31	peak	
10		4510.000	24.49	6.94	31.43	54.00	-22.57	AVG	
11		5220.000	35.38	8.29	43.67	74.00	-30.33	peak	
12		5220.000	22.66	8.29	30.95	54.00	-23.05	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug)


Horizontal

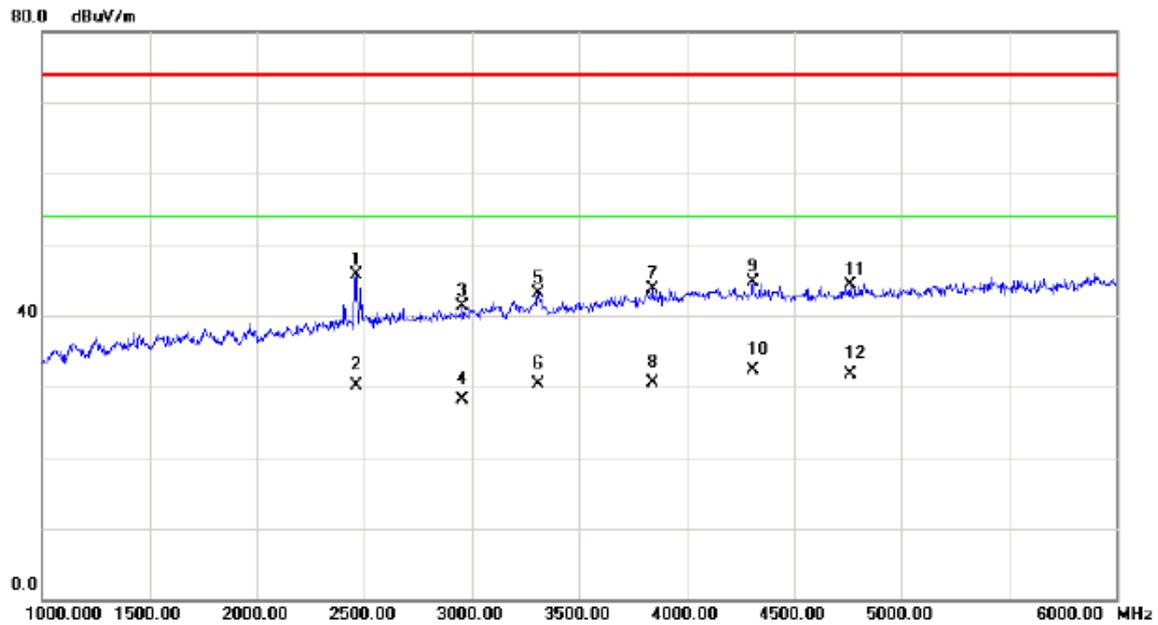

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2460.000	45.72	-0.08	45.64	74.00	-28.36	peak	
2		2460.000	30.10	-0.08	30.02	54.00	-23.98	AVG	
3		2955.000	39.54	1.68	41.22	74.00	-32.78	peak	
4		2955.000	26.35	1.68	28.03	54.00	-25.97	AVG	
5		3310.000	40.47	2.56	43.03	74.00	-30.97	peak	
6		3310.000	27.68	2.56	30.24	54.00	-23.76	AVG	
7		3840.000	38.22	5.46	43.68	74.00	-30.32	peak	
8		3840.000	25.10	5.46	30.56	54.00	-23.44	AVG	
9		4310.000	37.94	6.81	44.75	74.00	-29.25	peak	
10	*	4310.000	25.52	6.81	32.33	54.00	-21.67	AVG	
11		4760.000	37.09	7.30	44.39	74.00	-29.61	peak	
12		4760.000	24.36	7.30	31.66	54.00	-22.34	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug)


Vertical

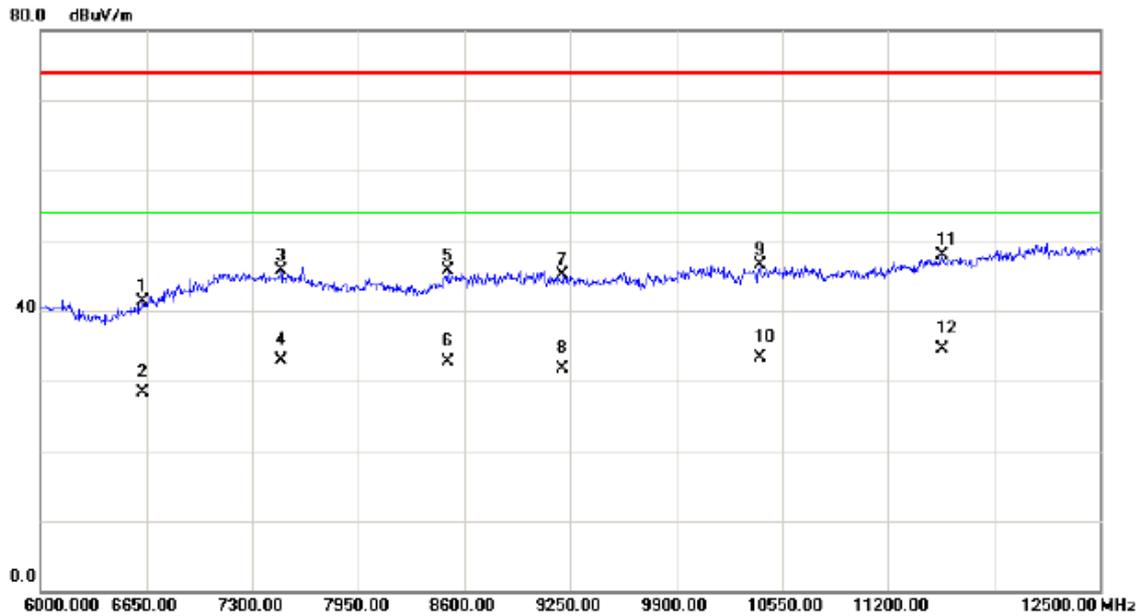

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6630.500	28.89	12.41	41.30	74.00	-32.70	peak	
2		6630.500	15.94	12.41	28.35	54.00	-25.65	AVG	
3		7475.500	29.83	15.88	45.71	74.00	-28.29	peak	
4		7475.500	16.95	15.88	32.83	54.00	-21.17	AVG	
5		8496.000	30.27	15.40	45.67	74.00	-28.33	peak	
6		8496.000	17.22	15.40	32.62	54.00	-21.38	AVG	
7		9204.500	29.44	15.75	45.19	74.00	-28.81	peak	
8		9204.500	15.92	15.75	31.67	54.00	-22.33	AVG	
9		10413.50	32.13	14.35	46.48	74.00	-27.52	peak	
10		10413.50	18.89	14.35	33.24	54.00	-20.76	AVG	
11		11531.50	27.54	20.35	47.89	74.00	-26.11	peak	
12	*	11531.50	14.11	20.35	34.46	54.00	-19.54	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug)


Horizontal

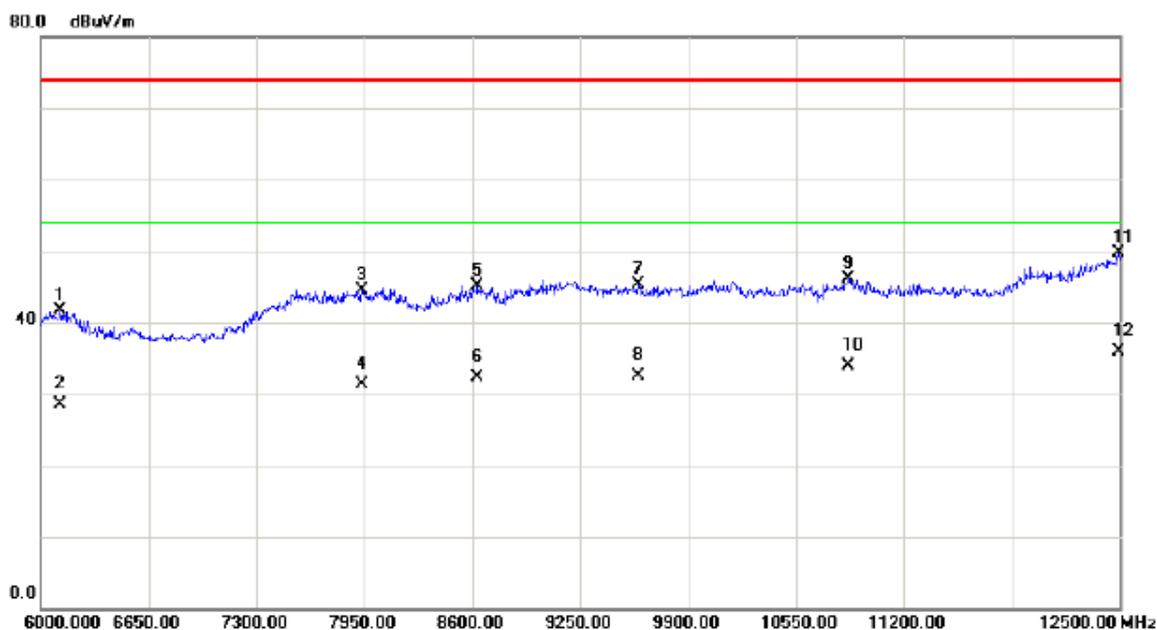

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6117.000	31.36	10.25	41.61	74.00	-32.39	peak	
2		6117.000	18.24	10.25	28.49	54.00	-25.51	AVG	
3		7937.000	28.50	16.08	44.58	74.00	-29.42	peak	
4		7937.000	15.26	16.08	31.34	54.00	-22.66	AVG	
5		8632.500	29.48	15.59	45.07	74.00	-28.93	peak	
6		8632.500	16.77	15.59	32.36	54.00	-21.64	AVG	
7		9601.000	30.00	15.35	45.35	74.00	-28.65	peak	
8		9601.000	17.17	15.35	32.52	54.00	-21.48	AVG	
9		10868.500	27.38	18.71	46.09	74.00	-27.91	peak	
10		10868.500	15.17	18.71	33.88	54.00	-20.12	AVG	
11		12493.500	32.01	17.75	49.76	74.00	-24.24	peak	
12	*	12493.500	18.25	17.75	36.00	54.00	-18.00	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG(EU Plug)


Vertical

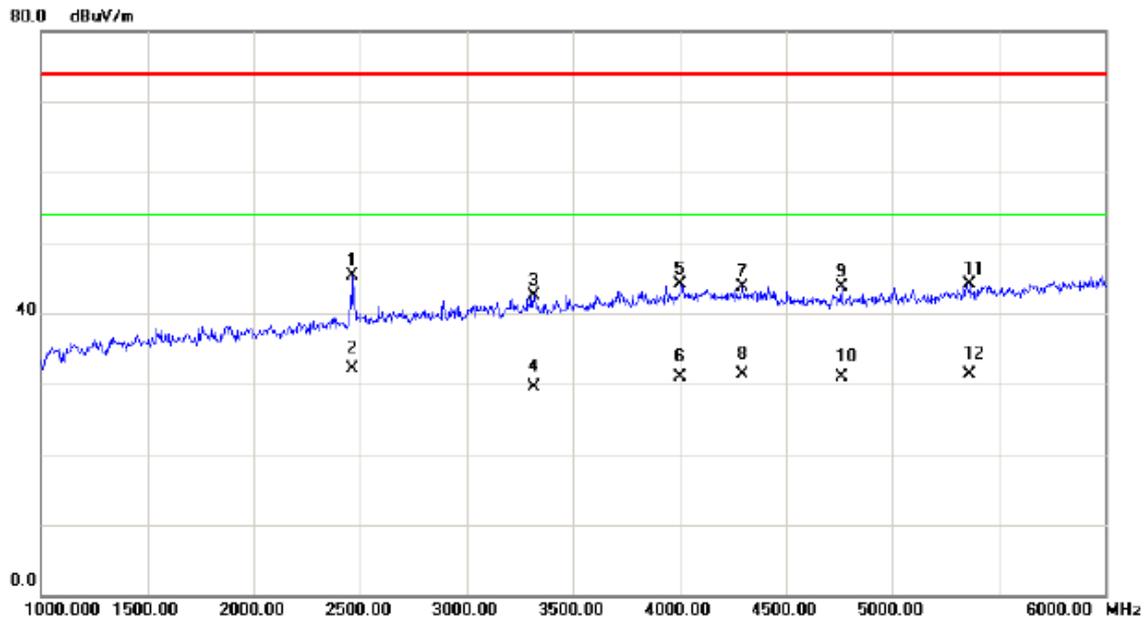

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2465.000	45.37	-0.06	45.31	74.00	-28.69	peak	
2	*	2465.000	32.15	-0.06	32.09	54.00	-21.91	AVG	
3		3315.000	39.88	2.57	42.45	74.00	-31.55	peak	
4		3315.000	27.02	2.57	29.59	54.00	-24.41	AVG	
5		4005.000	37.50	6.62	44.12	74.00	-29.88	peak	
6		4005.000	24.19	6.62	30.81	54.00	-23.19	AVG	
7		4295.000	37.00	6.80	43.80	74.00	-30.20	peak	
8		4295.000	24.57	6.80	31.37	54.00	-22.63	AVG	
9		4760.000	36.31	7.30	43.61	74.00	-30.39	peak	
10		4760.000	23.64	7.30	30.94	54.00	-23.06	AVG	
11		5365.000	35.43	8.74	44.17	74.00	-29.83	peak	
12		5365.000	22.60	8.74	31.34	54.00	-22.66	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG(EU Plug)


Horizontal

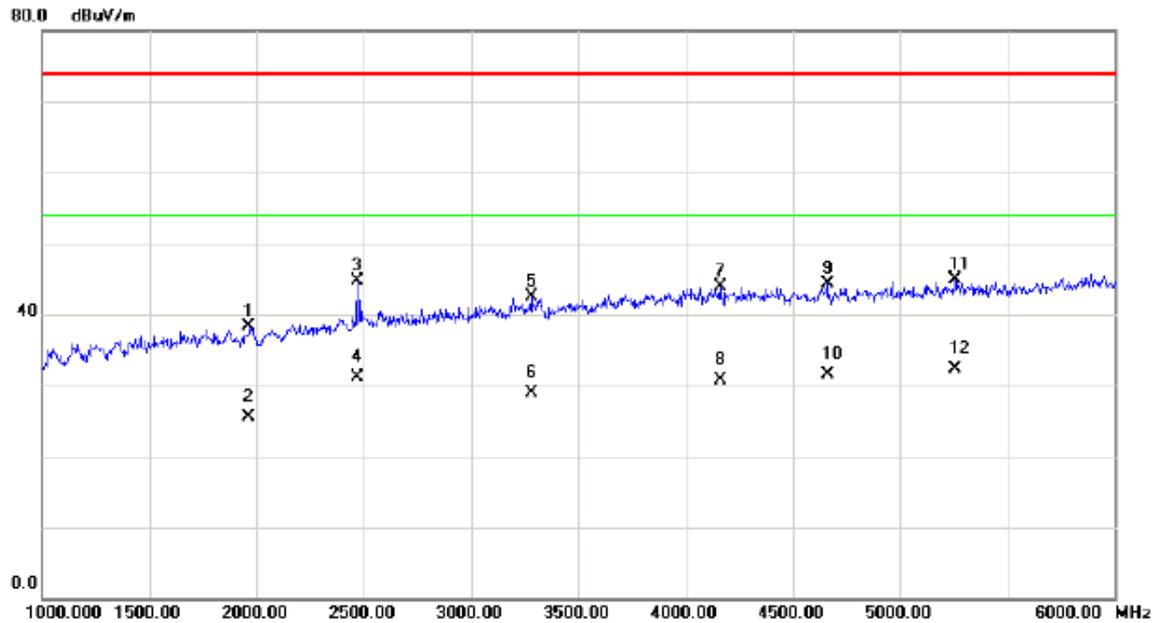

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1965.000	40.40	-2.04	38.36	74.00	-35.64	peak	
2		1965.000	27.57	-2.04	25.53	54.00	-28.47	AVG	
3		2470.000	44.78	-0.03	44.75	74.00	-29.25	peak	
4		2470.000	31.15	-0.03	31.12	54.00	-22.88	AVG	
5		3280.000	39.93	2.49	42.42	74.00	-31.58	peak	
6		3280.000	26.38	2.49	28.87	54.00	-25.13	AVG	
7		4160.000	37.24	6.71	43.95	74.00	-30.05	peak	
8		4160.000	23.98	6.71	30.69	54.00	-23.31	AVG	
9		4660.000	37.18	7.15	44.33	74.00	-29.67	peak	
10		4660.000	24.40	7.15	31.55	54.00	-22.45	AVG	
11		5255.000	36.52	8.41	44.93	74.00	-29.07	peak	
12	*	5255.000	23.86	8.41	32.27	54.00	-21.73	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG(EU Plug)


Vertical

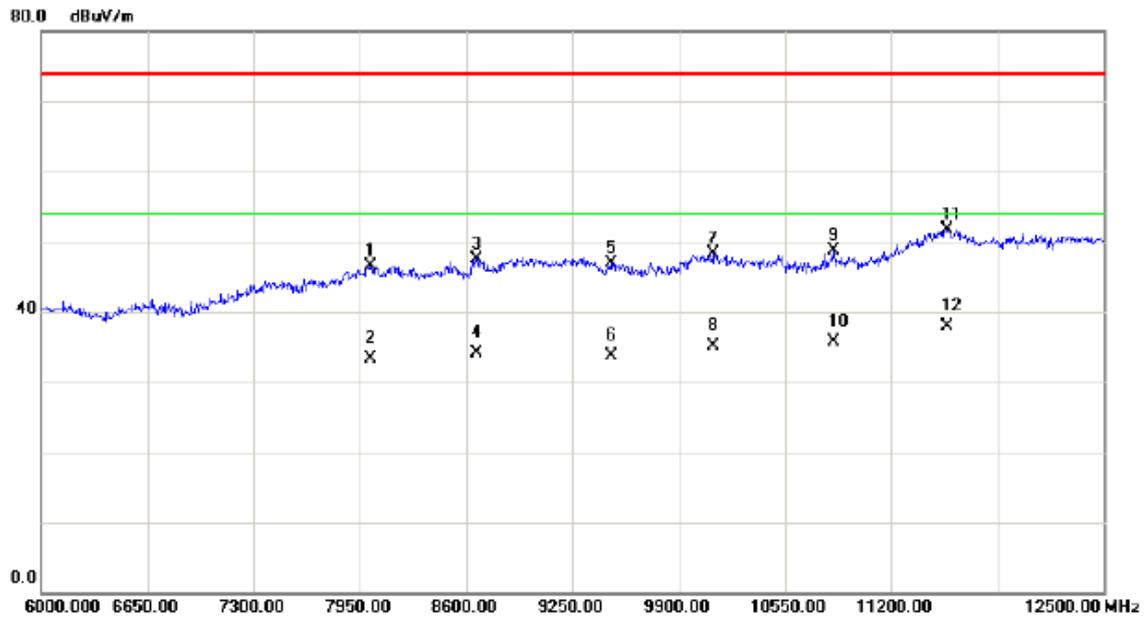

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		8015.000	30.41	16.07	46.48	74.00	-27.52	peak	
2		8015.000	17.16	16.07	33.23	54.00	-20.77	AVG	
3		8665.000	31.95	15.65	47.60	74.00	-26.40	peak	
4		8665.000	18.46	15.65	34.11	54.00	-19.89	AVG	
5		9484.000	31.67	15.20	46.87	74.00	-27.13	peak	
6		9484.000	18.47	15.20	33.67	54.00	-20.33	AVG	
7		10114.50	32.65	15.59	48.24	74.00	-25.76	peak	
8		10114.50	19.42	15.59	35.01	54.00	-18.99	AVG	
9		10849.00	30.18	18.45	48.63	74.00	-25.37	peak	
10		10849.00	17.32	18.45	35.77	54.00	-18.23	AVG	
11		11544.50	31.27	20.42	51.69	74.00	-22.31	peak	
12	*	11544.50	17.41	20.42	37.83	54.00	-16.17	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG (EU Plug)


Horizontal

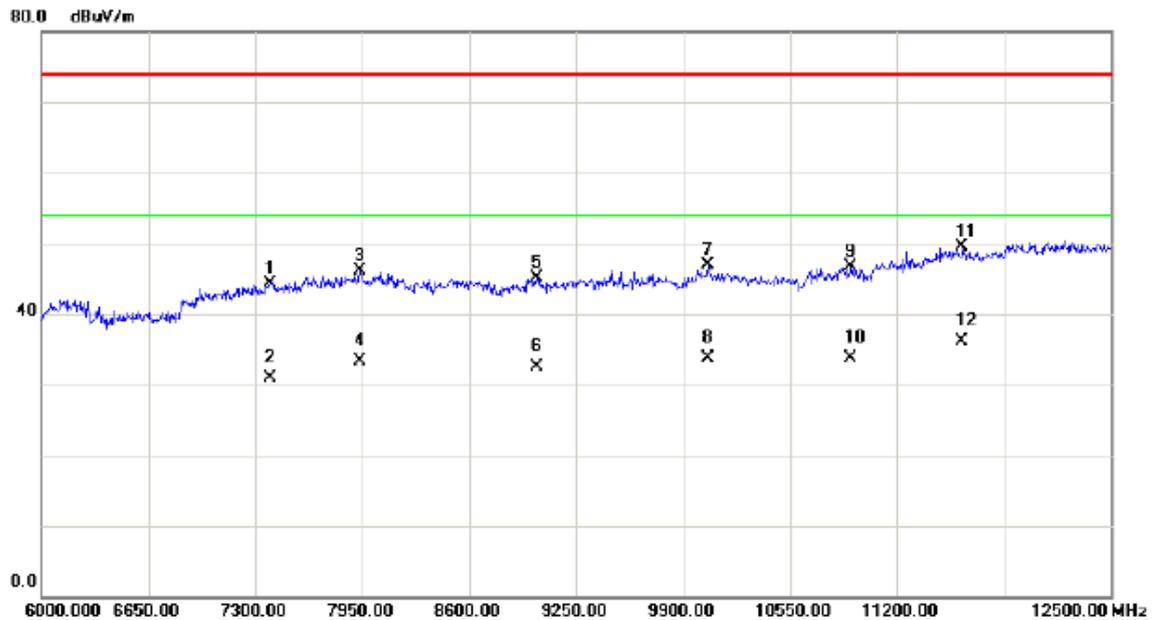

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7391.000	28.80	15.52	44.32	74.00	-29.68	peak	
2		7391.000	15.32	15.52	30.84	54.00	-23.16	AVG	
3		7937.000	30.00	16.08	46.08	74.00	-27.92	peak	
4		7937.000	17.21	16.08	33.29	54.00	-20.71	AVG	
5		9009.500	29.05	16.14	45.19	74.00	-28.81	peak	
6		9009.500	16.41	16.14	32.55	54.00	-21.45	AVG	
7		10049.500	31.04	15.86	46.90	74.00	-27.10	peak	
8		10049.500	17.81	15.86	33.67	54.00	-20.33	AVG	
9		10920.500	27.31	19.37	46.68	74.00	-27.32	peak	
10		10920.500	14.33	19.37	33.70	54.00	-20.30	AVG	
11		11596.500	28.67	20.76	49.43	74.00	-24.57	peak	
12	*	11596.500	15.34	20.76	36.10	54.00	-17.90	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle


Vertical

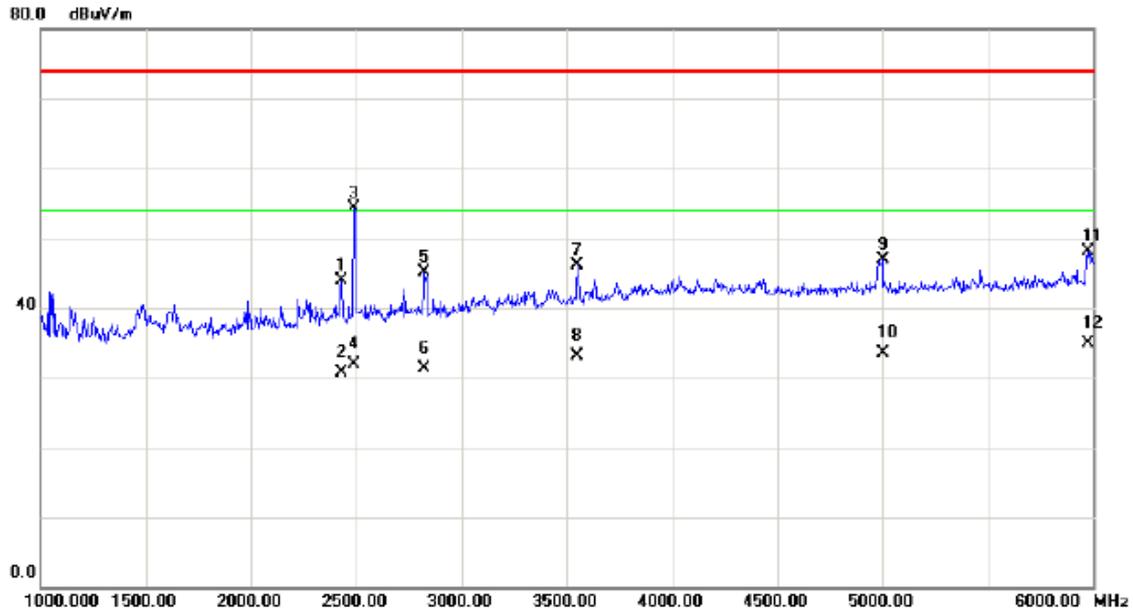

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2430.000	44.18	-0.20	43.98	74.00	-30.02	peak	
2		2430.000	30.97	-0.20	30.77	54.00	-23.23	AVG	
3		2490.000	54.26	0.05	54.31	74.00	-19.69	peak	
4		2490.000	31.86	0.05	31.91	54.00	-22.09	AVG	
5		2825.000	43.94	1.23	45.17	74.00	-28.83	peak	
6		2825.000	30.13	1.23	31.36	54.00	-22.64	AVG	
7		3550.000	42.79	3.36	46.15	74.00	-27.85	peak	
8		3550.000	29.65	3.36	33.01	54.00	-20.99	AVG	
9		5000.000	39.23	7.64	46.87	74.00	-27.13	peak	
10		5000.000	25.92	7.64	33.56	54.00	-20.44	AVG	
11		5975.000	38.44	9.71	48.15	74.00	-25.85	peak	
12	*	5975.000	25.11	9.71	34.82	54.00	-19.18	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle

Horizontal

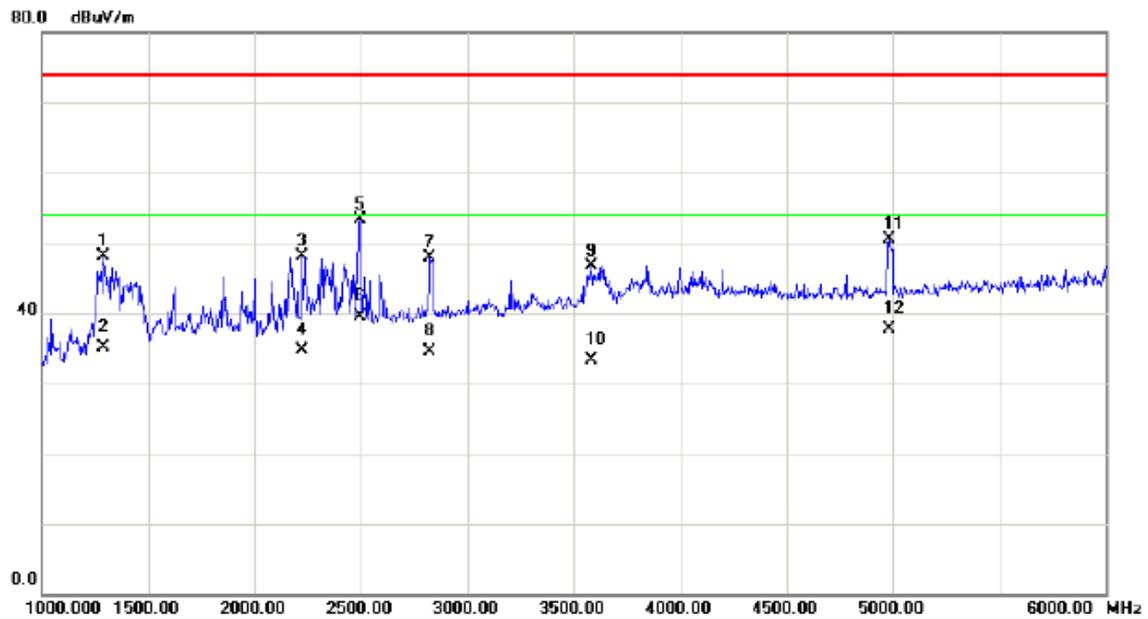

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin		
		MHz	dBuV	Factor	dBuV/m	dBuV/m	dB	Detector	Comment
1		1290.000	52.70	-4.68	48.02	74.00	-25.98	peak	
2		1290.000	39.71	-4.68	35.03	54.00	-18.97	AVG	
3		2225.000	49.04	-1.00	48.04	74.00	-25.96	peak	
4		2225.000	35.63	-1.00	34.63	54.00	-19.37	AVG	
5		2495.000	53.27	0.05	53.32	74.00	-20.68	peak	
6	*	2495.000	39.51	0.05	39.56	54.00	-14.44	AVG	
7		2825.000	46.72	1.23	47.95	74.00	-26.05	peak	
8		2825.000	33.27	1.23	34.50	54.00	-19.50	AVG	
9		3585.000	43.06	3.62	46.68	74.00	-27.32	peak	
10		3585.000	29.66	3.62	33.28	54.00	-20.72	AVG	
11		4980.000	42.80	7.61	50.41	74.00	-23.59	peak	
12		4980.000	30.15	7.61	37.76	54.00	-16.24	AVG	