



FCC Test Report

Product Name: Remote Radio Unit

Model Number: RRU3606

Report No: SYBH(R)068072008EB-1
FCC ID: QISRRU3606-1900

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518



Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has obtained the accreditation of THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION (A2LA), and Accreditation Council Certificate Number: 2174.01.
3. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
4. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-1.
5. The laboratory also has been listed by the VCCI to perform EMC measurements. The accreditation number is R2364, C2583, and T256.
6. The test report is invalid if not marked with "exclusive stamp for the test report".
7. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
8. The test report is invalid if there is any evidence of erasure and/or falsification.
9. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
10. Normally, the test report is only responsible for the samples that have undergone the test.
11. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



REPORT ON

FCC Test of Remote Radio Unit
Model Name: RRU3606

Report No: SYBH(R)068072008EB-1

REGULATION

47 CFR FCC Part 2, Subpart J
47 CFR FCC Part 24, Subpart E

CONCLUSION

PASSED

General Manager

2008-07-26
Date (y-m-d)

张兴海
Name

Signature



**Technical Responsibility
For Area of Testing**

2008-07-26
Date (y-m-d)

胡俊
Name

Signature

Test Lab Engineer

2008-07-26
Date (y-m-d)

梁昌冠
Name

Signature



Contents

1	<u>Summary</u>	5
2	<u>Product Description</u>	6
2.1	PRODUCTION INFORMATION OF THE EQUIPMENT UNDER TEST (EUT).....	6
2.2	MODIFICATION INFORMATION.....	8
3	<u>Test Site Description</u>	9
3.1	TESTING PERIOD.....	9
3.2	APPLIED STANDARDS.....	10
4	<u>Product Description</u>	11
4.1	TECHNICAL CHARACTERISTICS.....	11
4.2	EUT IDENTIFICATION LIST.....	13
5	<u>Main Test Instruments</u>	14
6	<u>Transmitter Measurements</u>	15
6.1	MAXIMUM CHANNEL POWER.....	16
6.2	MODULATION CHARACTERISTICS.....	21
6.3	OCCUPIED BANDWIDTH.....	24
6.4	BAND EDGES COMPLIANCE.....	27
6.5	SPURIOUS EMISSION AT ANTENNA TERMINAL.....	30
6.6	RADIATED SPURIOUS EMISSION.....	34
6.7	FREQUENCY STABILITY.....	37
7	<u>System Measurement Uncertainty</u>	41
8	<u>Appendices</u>	42



1 Summary

The table below summarizes the measurements and results for the equipment of Remote Radio Unit – RRU3606. Detailed results and descriptions are shown in the following pages.

table 1. **Summary of results for FCC requirements for PCS Band**

47 CFR FCC Part(s) Requirements		Description	Result
Specification	Limits		
2.1046	24.232	Maximum Channel Power	PASS
2.1047	-	Modulation Characteristics	PASS
2.1049	-	Occupied Bandwidth	PASS
2.1051	24.238	Band Edges Compliance	PASS
2.1051	24.238	Spurious Emission at Antenna Terminal	PASS
2.1053	24.238	Radiated Spurious Emission	PASS
2.1055	24.235	Frequency Stability	PASS

Note1: If no limits were applied, limits for product standards may be employed in the present test report.



2 Product Description

2.1 Production Information of the Equipment under Test (EUT)

2.1.1 General Description

The RRU3606 is developed by Huawei according to the TIA/EIA standards. In a CDMA2000 1X network, the RRU3606 and the BBU3606 forms a DBS which serves a cell or multiple logical sectors.

The functions of the RRU3606 are:

- | Receiving RF signals by using an antenna, down-converting the received RF signals to the intermediate frequency signals, implementing amplification, analog digit conversion, digital down conversion, matched filtering, and digital automatic gain control (DAGC) on the intermediate frequency signals, and sending the processed intermediate frequency signals to the BBU3606
- | Receiving downlink baseband data from an upper-level BBU3606, forwarding the data of the cascaded RRU3606, implementing shaping filtering, analog digit conversion on downlink spreading signals, and up-converting RF signals to the transmit frequency band
- | Providing multiplexing and filtering of signals transmitted and received on the RF channel

The RRU3606 connects to the BBU3606 through an optical interface (the CPRI interface) and communicates with an MS through the Um interface.

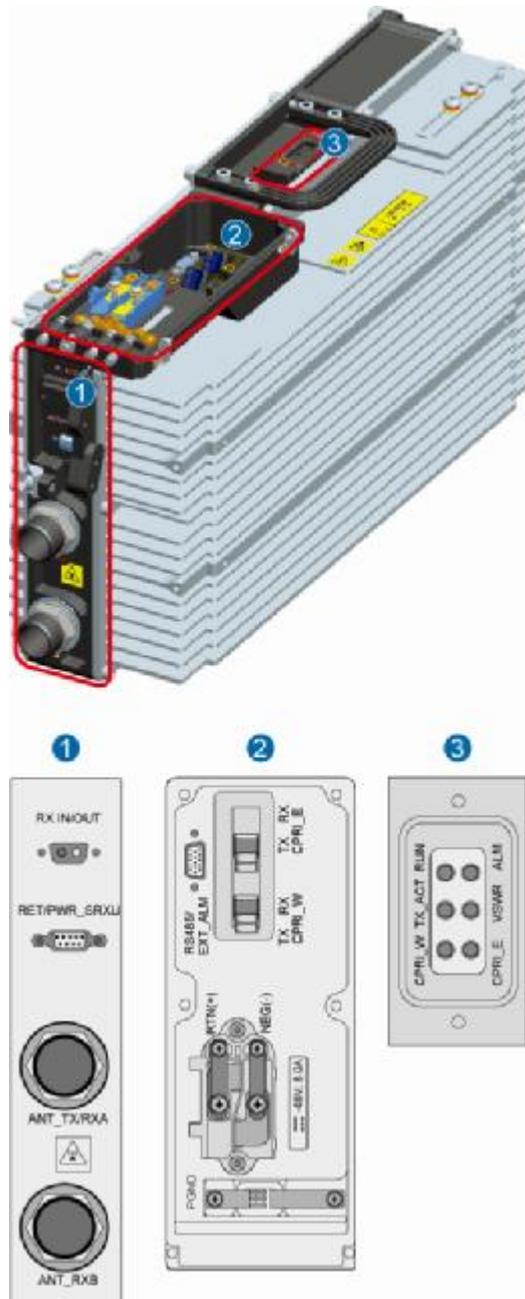


Figure 1. EUT Framework/ Appearance



2.1.2 Support function and Service

The EUT supports the function and service as follows:

table 2. **Service and Test mode List**

Service Name	Characteristic	Corresponding Test Mode	Remark(Note)
CDMA 1x	Modulation: BPSK,QPSK RC1&RC3	TM1	
1x Ev-DO	Modulation: 16QAM	TM2	

2.2 Modification Information

For original equipment, following table is not application.

table 3. **Modification Information**

Model Number	Board/Module	Original Version	New Version	Modify Information
Not applicable				
Not applicable				
Not applicable				



3 Test Site Description

The test site of:

***Huawei Technologies Co. Ltd.
P.O. Box 518129
Huawei base, bantian,
Longgang District, Shenzhen, China***

The test site description has been submitted to  and registration granted under the registration number **97456** on on Aug 20.2006.The test site has been accredited

by  and the accredited number is **2174.01** in June of 2006.

3.1 Testing Period

The test has been performed during the period of

Date of Start: 21. July.2008
Date of End: 26. July. 2008



3.2 Applied Standards

table 4. **Applied Standard**

Standards Name	Standards Description
47 CFR Part 2 (10-1-05 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
47 CFR Part 24 (10-1-05 Edition)	Personal Communications Services

table 5. **Test Method**

Standards Name	Standards Description
EIA/TIA-102-CAAA:1999	Digital C4FM/CQPSK Transceiver Measurement Methods (ANSI/TIA/EIA-102.CAAA-1999)
ANSI C63.4: 2003	Methods of Measurement of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ITU-R Recommendation SM.329-10 (2003)	Unwanted emissions in the spurious domain
3GPP2 C.S0010-B	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Base Stations. Release B
3GPP2 C.S0032-0	Recommended Minimum Performance Standards for cdma2000 High Rate Packet Data Access Network
3GPP2 C.S0057-B	Band Class Specification for cdma2000 Spread Spectrum Systems



4 Product Description

4.1 Technical Characteristics

4.1.1 Frequency Range

table 6. **Frequency Range for PCS Band**

<input checked="" type="checkbox"/> FDD <input type="checkbox"/> TDD	Center Frequency Range	Frequency Block Range
Uplink band:	Uplink band (RX):	1850 to 1910 MHz
Downlink band:	Downlink band (TX):	1930 to 1990 MHz

4.1.2 Channel Separation/Bandwidth

table 7. **Frequency Interval and Channel Separation for PCS Band**

Frequency interval:	50 kHz
Channel separation/bandwidth:	1.25MHz

4.1.3 Type of Emission

Refer to FCC part 2.201 and 2.202..

table 8. **Type of Emission**

Emission Designation:	1M25F9W
-----------------------	---------



4.1.4 Environmental Requirements

table 9. **Environmental Requirements**

Minimum temperature:	-40 °C
Maximum temperature:	+52 °C
Relative Humidity:	5% to 95% RH

table 10. **Power Source DC Power Source**

DC voltage nominal:	=== -48 V
DC voltage range:	=== -60 V to === -37 V
DC current maximal:	8 A

4.1.5 Tune-up Procedure

Refer to FCC 2.1033(c) (9).

Please reference the document Tune-up Procedure in TCF.



4.2 EUT Identification List

4.2.1 Component Parts Information

table 11. Component Parts Information

Model Name	Qty.	H/W Ver.	S/W Ver.	Description	Serial Number
QCWM1RRUF C	1	VER.B	V300R006C04	Transceiver &Power Amplifier Module	210231604110870000061
CMPT	1	VER.C	V300R006C04	Control Main Processing transmitter	0302HKL1082000185
HCPM	1	VER.B	V300R006C04	1X Channel Processing Module	21020FXD107A800058
HECM	1	VER.B	V300R006C04	EVDO Channel Processing Module	21020GBA1077800033

4.2.2 Adapter Technical Data

Not Applicable

4.2.3 Battery Technical Data

Not Applicable

4.2.4 FCC Identification

Grantee Code: QIS
Product Code: RRU3606-1900
FCC Identification: QISRRU3606-1900



5 Main Test Instruments

table 12. Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until (y-m-d)
Signal Analyzer	R&S	FSQ 40	100025	09.05.2008
Test Receiver Display Unit	R&S	ESMI 804.8932.52	829214/011	04.21.2009
Test Receiver RF Unit	R&S	ESMI 1032.5640.53	829550/008	04.21.2009
Pre-Amplifier	Agilent	83017A	3950M00246	03.04.2009
BiLog Antenna	Schaffner	CBL 6112B	2747	10.16.2008
Horn Antenna	R&S	HF906 4044.4507.02	359287/006	12.12.2008
Dipole	Schwarzbeck	D69250- UHAP/D69250- VHAP	979/917	10.11.2008
Signal Generator	R&S	SMR 40	100325	05.12.2009
Climate Chamber	WEISS	WK1-3	2101091638	10.11.2008



6 Transmitter Measurements

For tests in this section, typical operating frequency points (channels) were used, which include bottom/lowest channel (B), middle channel (M) and top/highest channel (T) of each frequency block as the table below. Unless otherwise stated, all tested frequency points were employed to perform tests.

table 13. **Frequency points (channels) selected to perform tests**

Operating Band	Multi-Carriers	Channels No.		
		Channel B	Channel M	Channel T
PCS band:	1	No.825 1971.25MHz	No.1000 1980MHz	No 1175 1988.75MHz
PCS band:	2	No.825/850 1971.25/1972.5MHz	No.1000/1025 1980/1981.25MHz	No .1175/1150 1988.75/1987.5MHz
PCS band:	3	No.825/850/875 1971.25/1972.5/ 1973.75MHz	No.975/1000/1025 1978.75/1980/ 1981.25MHz	No 1175/1150/1125 1988.75/1987.5/ 1986.25MHz
PCS band:	4	No.825/850/875/900 1971.25/1972.5/ 1973.75/1975MHz	No.950/975/1000/1025 1977.5/1978.75/ 1980/1981.25MHz	No.1175/1150/ 1125/1100 1988.75/1987.5/ 1986.25/1985MHz

6.1 Maximum Channel Power

6.1.1 Test Conditions

table 14. **Test Conditions**

Preconditioning:	1 hour
Measured at:	Antenna connector
Ambient temperature (+15 °C to +35 °C):	22 °C
Relative humidity (45 % to 85 %):	69 %
Air Pressure (86 kPa to 106 kPa):	101 kPa
Test Configuration/Mode:	PCS Band: B, M, T Multi Carriers: 1, 2, 3, 4, TM1, TM2

6.1.2 Test Specifications and Limits

Compliance with FCC part 2.1046 and part 24.232, base stations are limited to 1640 watts peak equivalent isotropically radiated power (EIRP), and in no any case may the peak power of a base station transmitter exceeds 100 watts.

table 15. **FCC Limits for PCS Band**

Maximum EIRP:	< 1640 Watts (= 62 dBm)
Maximum Output Power:	< 100 Watts (= 50 dBm)

6.1.3 Test Method and Setup

The EUT (Remote RF Unit, RRU) was connected to the Wireless Signal Analyzer or equivalent R&S FSQ40 via one RF connector, and other RF connectors were connected to match loads. The EUT was controlled to transmit maximum power by Console Computer. Measure and record the Maximum Channel Power of the EUT by the R&S FSQ40.

Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an RMS equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

Before the test, (1) For CDMA2000 1X system, set the EUT/BTS to transmit a signal modulated with a combination of Pilot, Sync, Paging, and 6 traffic channels; (2) For CDMA2000 1X EV-DO system, configure the MAC channel with 14 MAC indices, i.e. the RA channel and 13 RPC channels.

Test setup

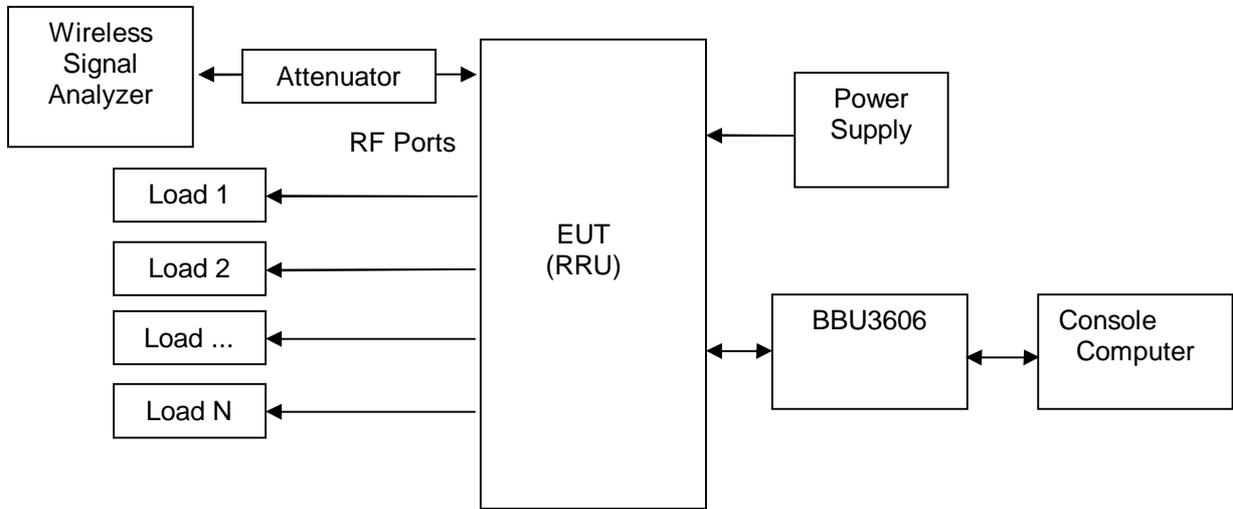


Figure 2. TEST SETUP

6.1.4 Measurement Results

(1) TM1: CDMA 1X

(a) Single Carrier

table 16. Measurement Output Power for single carrier

Maximum Output Power (dBm)					
Channel B No.825 1971.25MHz		Channel M No.1000 1980MHz		Channel T No 1175 1988.75MHz	
Measured	Limit	Measured	Limit	Measured	Limit
42.89	< 50	43.10	< 50	42.96	< 50

(b) Two Carriers

table 17. Measurement Output Power for two carriers

Maximum Output Power (dBm)					
Channel B No.825/850 1971.25/1972.5MHz		Channel M No.1000/1025 1980/1981.25MHz		Channel T No .1175/1150 1988.75/1987.5MHz	
Measured	Limit	Measured	Limit	Measured	Limit
Carrier 1					
42.94	< 50	42.90	< 50	43.04	< 50
Carrier 2					
42.82	< 50	42.90	< 50	43.01	< 50
Total					
45.89	< 50	45.91	< 50	46.04	< 50



(c) Three Carriers

table 18. Measurement Output Power for three carriers

Maximum Output Power (dBm)					
Channel B No.825/850/875 1971.25/1972.5/ 1973.75MHz		Channel M No.975/1000/1025 1978.75/1980/ 1981.25MHz		Channel T No 1175/1150/1125 1988.75/1987.5/ 1986.25MHz	
Measured	Limit(dBm)	Measured	Limit	Measured	Limit
Carrier 1					
42.81	< 50	43.18	< 50	42.96	< 50
Carrier 2					
42.87	< 50	43.02	< 50	43.11	< 50
Carrier 3					
42.81	< 50	42.92	< 50	42.88	< 50
Total					
47.60	< 50	47.81	< 50	47.76	< 50

(d) Four Carriers

table 19. Measurement Output Power for four carriers

Maximum Output Power (dBm)					
Channel B No.825/850/875/900 1971.25/1972.5/ 1973.75/1975MHz		Channel M No.950/975/1000/1025 1977.5/1978.75/ 1980/1981.25MHz		Channel T No.1175/1150/1125/1100 1988.75/1987.5/ 1986.25/1985MHz	
Measured	Limit	Measured	Limit	Measured	Limit
Carrier 1					
41.59	< 50	41.76	< 50	41.86	< 50
Carrier 2					
41.79	< 50	41.67	< 50	41.82	< 50
Carrier 3					
41.58	< 50	41.73	< 50	41.77	< 50
Carrier4					
41.69	< 50	41.46	< 50	41.48	< 50
Total					
47.68	< 50	47.68	< 50	47.75	< 50



(2) TM2: CDMA 1X EV-DO

(a) Single Carrier

table 20. **Measurement Output Power for single carrier**

Maximum Output Power (dBm)					
Channel B No.825 1971.25MHz		Channel M No.1000 1980MHz		Channel T No 1175 1988.75MHz	
Measured	Limit	Measured	Limit	Measured	Limit
42.92	< 50	43.12	< 50	43.00	< 50

(b) Two Carriers

table 21. **Measurement Output Power for two carriers**

Maximum Output Power (dBm)					
Channel B No.825/850 1971.25/1972.5MHz		Channel M No.1000/1025 1980/1981.25MHz		Channel T No .1175/1150 1988.75/1987.5MHz	
Measured	Limit	Measured	Limit	Measured	Limit
Carrier 1					
42.88	< 50	43.20	< 50	43.15	< 50
Carrier 2					
43.03	< 50	43.13	< 50	43.13	< 50
Total					
45.97	< 50	46.18	< 50	46.15	< 50

(c) Three Carriers

table 22. **Measurement Output Power for three carriers**

Maximum Output Power (dBm)					
Channel B No.825/850/875 1971.25/1972.5/ 1973.75MHz		Channel M No.975/1000/1025 1978.75/1980/ 1981.25MHz		Channel T No 1175/1150/1125 1988.75/1987.5/ 1986.25MHz	
Measured	Limit	Measured	Limit	Measured	Limit
Carrier 1					
42.77	< 50	43.01	< 50	42.83	< 50
Carrier 2					



42.95	< 50	42.90	< 50	42.95	< 50
Carrier 3					
42.92	< 50	42.80	< 50	42.72	< 50
Total					
47.65	< 50	47.68	< 50	47.61	< 50

(d) Four Carriers

table 23. **Measurement Output Power for four carriers**

Maximum Output Power (dBm)					
Channel B No.825/850/875/900 1971.25/1972.5/ 1973.75/1975MHz		Channel M No.950/975/1000/1025 1977.5/1978.75/ 1980/1981.25MHz		Channel T No.1175/1150/1125/1100 1988.75/1987.5/ 1986.25/1985MHz	
Measured	Limit	Measured	Limit	Measured	Limit
Carrier 1					
41.77	< 50	41.67	< 50	41.84	< 50
Carrier 2					
41.74	< 50	41.62	< 50	41.73	< 50
Carrier 3					
41.96	< 50	41.69	< 50	41.64	< 50
Carrier4					
41.84	<50	41.47	<50	41.57	<50
Total					
47.85	< 50	47.63	< 50	47.72	< 50

6.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.2 Modulation Characteristics

6.2.1 Test Conditions

table 24. **Test Conditions**

Preconditioning:	1 hour
Measured at:	Antenna connector
Ambient temperature (+15 °C to +35 °C):	22°C
Relative humidity (45 % to 85 %):	69 %
Air Pressure (86 kPa to 106 kPa):	101 kPa
Test Configuration/Mode:	PCS Band: B, M, T Multi Carriers: 1 TM1, TM2

6.2.2 Test Specifications and Limits

No specific modulation characteristics requirement limits in FCC part 2.1047 and 47 CFR FCC Part 24, Subpart E for PCS Band. In addition, limits according to the technical requirements of the EUT can be adopted as showed in the following table.

table 25. **Limits According to 3GPP2 C.S0010-B and C.S0032-0**

Limits	Rho > 0.912 (for CDMA2000 1X) Rho > 0.97 (for CDMA 1X EV-DO)
--------	---

6.2.3 Test Method and Setup

The EUT (Remote RF Unit, RRU) was connected to the Wireless Signal Analyzer or equivalent R&S FSQ40 via one RF connector, and other RF connectors were connected to match loads. The EUT was controlled to transmit maximum power by Console Computer. Measure and record the Modulation Characteristics of the EUT by the R&S FSQ40.

For the CDMA2000 1X, the measurement was made based on two Radio Configurations: RC1 and RC3. The modulation mode of RC1 is BPSK, and the modulation mode of RC3 is QPSK. For the CDMA2000 1X EV-DO, the modulation mode is 16-QAM.

Test setup

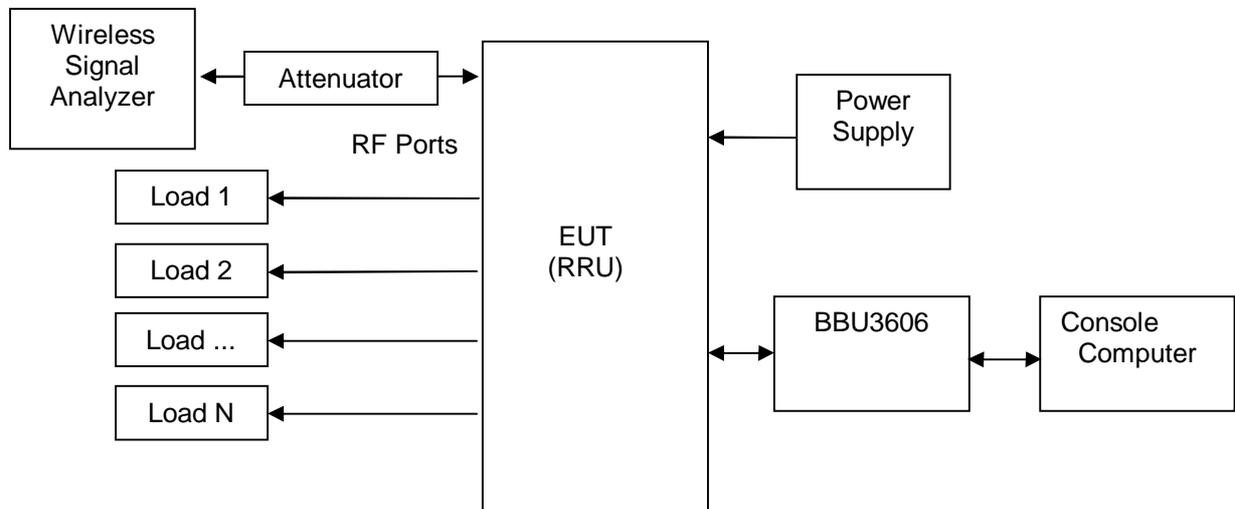


Figure 3. TEST SETUP

6.2.4 Measurement Results

(1) TM1: CDMA 1X

(a) RC1

table 26. Measurement Results for RC1

Modulation Characteristics				
Parameters Observed (Type/Mode)	channel	Measured	Limit	Remark
Rho(BPSK)	825	0.956	>0.912	See Appendix A
	1000	0.959	>0.912	See Appendix A
	1175	0.960	>0.912	See Appendix A

(b) RC3

table 27. Measurement Results for RC3

Parameters Observed (Type/Mode)	channel	Measured	Limit	Remark
Rho(QPSK)	825	0.980	>0.912	See Appendix A
	1000	0.977	>0.912	See Appendix A
	1175	0.977	>0.912	See Appendix A

(2) TM2: CDMA 1X EVDO

table 28. Measurement Results for 1X EVDO

Modulation Characteristics				
Parameters Observed (Type/Mode)	channel	Measured	Limit	Remark



Rho(16-QAM)	825	0.982	>0.97	See Appendix A
	1000	0.984	>0.97	See Appendix A
	1175	0.981	>0.97	See Appendix A

6.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to Appendix A.

6.3 Occupied Bandwidth

6.3.1 Test Conditions

table 29. **Test Conditions**

Preconditioning:	1 hour
Measured at:	Antenna connector
Ambient temperature (+15 °C to +35 °C):	22 °C
Relative humidity (45 % to 75 %):	70%
Air Pressure (86 kPa to 106 kPa):	101 kPa
Test Configuration/Mode:	PCS Band: B, M, T Multi Carriers: 1 TM1, TM2,

6.3.2 Test Specifications and Limits

No specific occupied bandwidth requirement in FCC part 2.1049 and part 24 subpart E for PCS Band. Limits according to the technical requirements of the EUT can be adopted as showed in the following table.

table 30. **Limits According to EUT technical requirements**

Limits	< 1.48MHz
--------	-----------

6.3.3 Test Method and Setup

The EUT (Remote RF Unit, RRU) was connected to the Spectrum Analyzer or equivalent R&S FSQ40 via one RF connector, and other RF connectors were connected to match loads. The EUT was controlled to transmit maximum power by Console Computer. Measure and record the Occupied Bandwidth of the EUT by the R&S FSQ40.

Refer to 47CFR part2.1049 section (g) & (h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured (as 99% bandwidth).

Measurement bandwidth (RBW): 20 kHz
 Video bandwidth (VBW): 300 kHz

Test setup

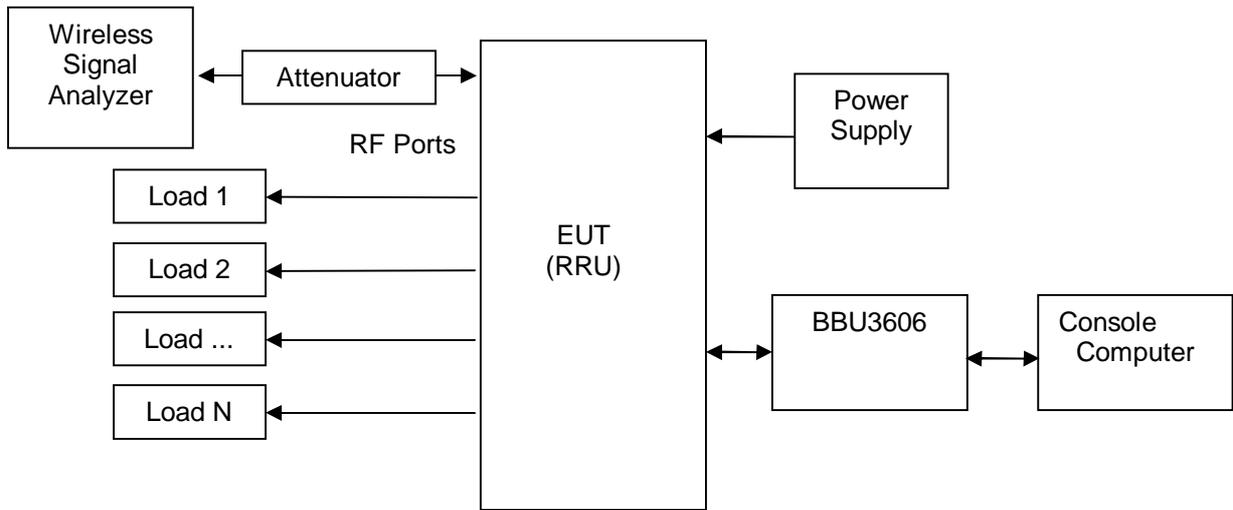


Figure 4. TEST SETUP

6.3.4 Measurement Results

(1) TM1: CDMA 1X

table 31. Measurement Results for CDMA 1X

Occupied Bandwidth (99% Bandwidth)					
Channel B No.825 1971.25MHz		Channel M No.1000 1980MHz		Channel T No 1175 1988.75MHz	
Measured	Limit	Measured	Limit	Measured	Limit
1.282	< 1.48	1.276	<1.48	1.276	< 1.48

(2) TM2: CDMA 1X EVDO

table 32. Measurement Results for CDMA 1X EVDO

Occupied Bandwidth (99% Bandwidth)					
Channel B No.825 1971.25MHz		Channel M No.1000 1980MHz		Channel T No 1175 1988.75MHz	
Measured	Limit	Measured	Limit	Measured	Limit
1.270	< 1.48	1.270	<1.48	1.270	< 1.48



6.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to Appendix B.

6.4 Band Edges Compliance

6.4.1 Test Conditions

table 33. Test Conditions

Preconditioning:	1 hour
Measured at:	Antenna connector
Ambient temperature (+15 °C to +35 °C):	22 °C
Relative humidity (45 % to 85 %):	69 %
Air Pressure (86 kPa to 106 kPa):	101 kPa
Test Configuration/Mode:	PCS Band: B, T Multi Carriers: 1, 4 TM1, TM2

6.4.2 Test Specifications and Limits

Compliance with FCC part 2.1051 and part 24.238, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, and the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

table 34. FCC Limits for PCS Band

Limit:	$< P[\text{Watt}] - (43 + 10 \log_{10} P) = 10 \log_{10}(1000P) - (43 + 10 \log_{10} P) = 30 - 43 = -13 \text{ dBm}$
--------	--

6.4.3 Test Method and Setup

The EUT (Remote RF Unit, RRU) was connected to the Spectrum Analyzer or equivalent R&S FSQ40 via one RF connector, and other RF connectors were connected to match loads. The EUT was controlled to transmit maximum power by Console Computer. Measure and record the Band Edge Spurious Emissions of the EUT by the R&S FSQ40.

Set the Spectrum Analyzer or equivalent in power averaging mode and resolution bandwidth (RBW) as close to 1.0% of the emission bandwidth as possible. Set the sweep span to cover at least $\pm 250\%$ of the emission bandwidth or 2 MHz, which is larger.

Measurement bandwidth (RBW) of Spectrum Analyzer or equivalent:
 for CDMA equipments 20 kHz (close to 1% of 1.25 MHz)

Test setup

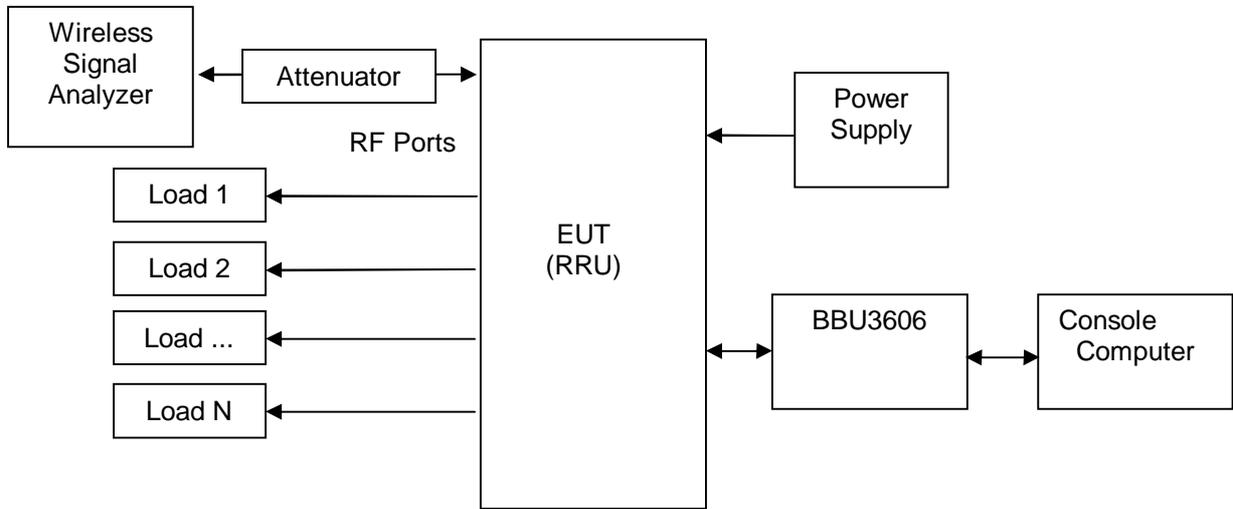


Figure 5. TEST SETUP

6.4.4 Measurement Results

(1) TM1: CDMA 1X

(a) Single Carrier

table 35. Measurement Results for 1X

	Channel No./Operating Frequency	Multi-Carriers	Measured Frequency Range (MHz)	Max. Spurious Level Measured (dBm)	Limit (dBm)	Remark
B	No.825 1971.25MHz	1	1929 to 1930	-40.49	< -13	See Appendix C
T	No 1175 1988.75MHz	1	1990 to 1991	-28.28	< -13	See Appendix C

(b) Multi Carriers

table 36. Measurement Results for 1X

	Channel No./Operating Frequency	Multi-Carriers	Measured Frequency Range (MHz)	Max. Spurious Level Measured (dBm)	Limit (dBm)	Remark
B	No.825/850/875/900 1971.25/1972.5/ 1973.75/1975MHz	4	1929 to 1930	-40.28	< -13	See Appendix C
T	No.1175/1150/1125/1 100 1988.75/1987.5/ 1986.25/1985MHz	4	1990 to 1991	-16.67	< -13	See Appendix C

(2) CDMA 1X EV-DO
a) Single Carrier

table 37. Measurement Results for 1X EVDO

Channel No./Operating Frequency	Multi-Carriers	Measured Frequency Range (MHz)	Max. Spurious Level Measured (dBm)	Limit (dBm)	Remark
B No.825 1971.25MHz	1	1929 to 1930	-40.43	< -13	See Appendix C
T No 1175 1988.75MHz	1	1990 to 1991	-25.23	< -13	See Appendix C

(b) Multi Carriers

table 38. Measurement Results for 1X EVDO

Channel No./Operating Frequency	Multi-Carriers	Measured Frequency Range (MHz)	Max. Spurious Level Measured (dBm)	Limit (dBm)	Remark
B No.825/850/875/900 1971.25/1972.5/ 1973.75/1975MHz	4	1929 to 1930	-40.08	< -13	See Appendix C
T No.1175/1150/1125/1 100 1988.75/1987.5/ 1986.25/1985MHz	4	1990 to 1991	-19.67	< -13	See Appendix C

6.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.
 For the measurement results refer to Appendix C.

6.5 Spurious Emission at Antenna Terminal

6.5.1 Test Conditions

table 39. **Test Conditions**

Preconditioning:	1 hour
Measured at:	Antenna connector
Ambient temperature (+15 °C to +35 °C):	22 °C
Relative humidity (45 % to 85 %):	69 %
Air Pressure (86 kPa to 106 kPa):	101 kPa
Test Configuration/Mode:	PCS Band: B, M, T Multi Carriers: 1, 4 TM1, TM2

6.5.2 Test Specifications and Limits

Compliance with FCC part 2.1051 and part 24.238, based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

table 40. **FCC Limits for PCS Band**

Limit:	$< P[\text{Watt}] - (43 + 10 \log_{10} P) = 10 \log_{10}(1000P) - (43 + 10 \log_{10} P) = 30 - 43 = -13 \text{dBm}$ (per MHz)
--------	--

6.5.3 Test Method and Setup

The EUT (Remote RF Unit, RRU) was connected to the Spectrum Analyzer or equivalent R&S FSQ40 via one RF connector, and other RF connectors were connected to match loads. The EUT was controlled to transmit maximum power by Console Computer. Measure and record the Out-band Spurious Emissions of the EUT by the R&S FSQ40.

For the Out-of-block Emissions:

Frequency Search Range:

According to FCC part 2.1057, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Measurement bandwidth (RBW) for 9 kHz to 10th harmonic included: 1MHz;

Alternatively, according to ITU SM.329-10,

Measurement bandwidth (RBW) for 9 kHz up to 150 KHz: 1 kHz;

Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;

Measurement bandwidth (RBW) for 30 MHz up to 20 GHz: 1MHz;

Test setup

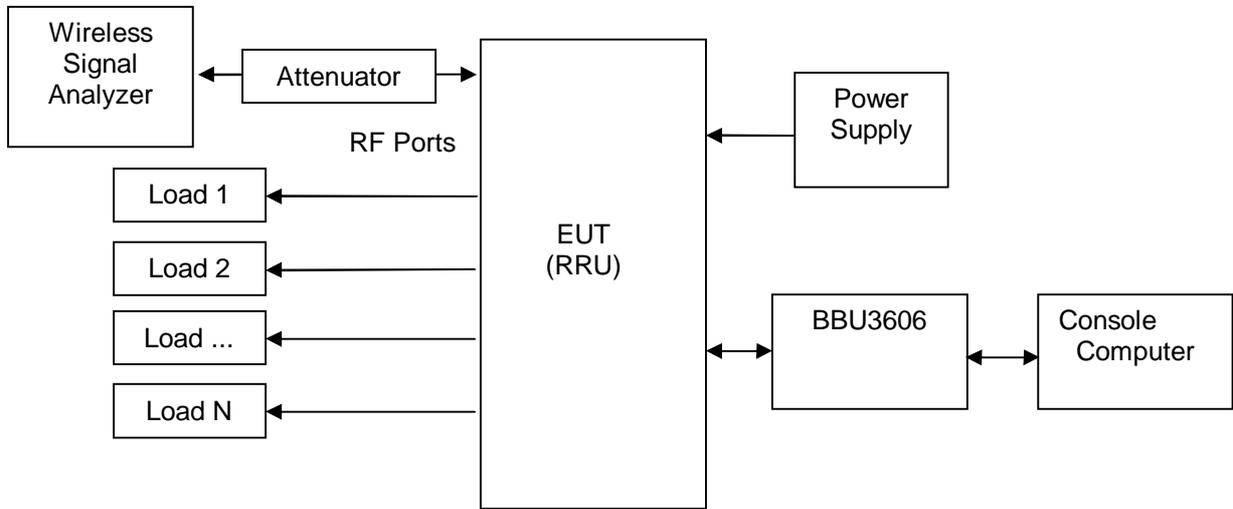


Figure 6. TEST SETUP

6.5.4 Measurement Results

6.5.4.1 Out-of-block Emissions Measurement

(1) CDMA 1X

Single Carrier

table 41. Measurement Results for CDMA 1X

Channel No./Operating Frequency	Multi-Carriers	Measured Frequency Range	Max. Spurious Level Measured (dBm)	Limit (dBm)	Remark
B No.825 1971.25MHz	1	9 kHz to 20 GHz	-22.41	< -13	See Appendix D
M No.1000 1980MHz	1	9 kHz to 20 GHz	-20.96	< -13	See Appendix D
T No 1175 1988.75MHz	1	9 kHz to 20 GHz	-22.13	< -13	See Appendix D

(b) Multi Carriers

table 42. Measurement Results for CDMA 1X

Channel No./Operating Frequency	Multi-Carriers	Measured Frequency Range (MHz)	Max. Spurious Level Measured (dBm)	Limit (dBm)	Remark
B No.825/850/875/900 1971.25/1972.5/ 1973.75/1975MHz	4	9 kHz to 20 GHz	-20.87	< -13	See Appendix D



M	No.950/975/1000/1025 1977.5/1978.75/ 1980/1981.25MHz	4	9 kHz to 20 GHz	-23.37	< -13	See Appendix D
T	No.1175/1150/1125/1 100 1988.75/1987.5/ 1986.25/1985MHz	4	9 kHz to 20 GHz	-20.68	< -13	See Appendix D

(2) CDMA 1X EV-DO

(a) Single Carrier

table 43. Measurement Results for CDMA 1X EVDO

	Channel No./Operating Frequency	Multi-Carriers	Measured Frequency Range	Max. Spurious Level Measured (dBm)	Limit (dBm)	Remark
B	No.825 1971.25MHz	1	9 kHz to 20 GHz	-22.69	< -13	See Appendix D
M	No.1000 1980MHz	1	9 kHz to 20 GHz	-23.15	< -13	See Appendix D
T	No 1175 1988.75MHz	1	9 kHz to 20 GHz	-23.92	< -13	See Appendix D

(b) Multi Carriers

table 44. Measurement Results for CDMA 1X EVDO

	Channel No./Operating Frequency	Multi-Carriers	Measured Frequency Range (MHz)	Max. Spurious Level Measured (dBm)	Limit (dBm)	Remark
B	No.825/850/875/900 1971.25/1972.5/ 1973.75/1975MHz	4	9 kHz to 20 GHz	-19.48	< -13	See Appendix D
M	No.950/975/1000/1025 1977.5/1978.75/ 1980/1981.25MHz	4	9 kHz to 20 GHz	-19.10	< -13	See Appendix D
T	No.1175/1150/1125/1 100 1988.75/1987.5/ 1986.25/1985MHz	4	9 kHz to 20 GHz	-19.24	< -13	See Appendix D



6.5.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to Appendix D.

6.6 Radiated Spurious Emission

6.6.1 Test Conditions

table 45. **Test Conditions**

Preconditioning:	1 hour
Measured at:	Enclosure
Ambient temperature (+15 °C to +35 °C):	22°C
Relative humidity (45 % to 85 %):	70 %
Air Pressure (86 kPa to 106 kPa):	101 kPa
Test Configuration/Mode:	PCS Band: M Multi Carriers: 1 TM1

6.6.2 Test Specifications and Limits

Compliance with FCC part 2.1051 and part 24.238, based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

table 46. **FCC Limits for PCS Band**

Limit:	$< P[\text{Watt}] - (43 + 10 \log_{10} P) = 10 \log_{10}(1000P) - (43 + 10 \log_{10} P) = 30 - 43 = -13 \text{dBm}$ (per MHz)
--------	--

6.6.3 Test Method and Setup

(a) Measurements were made to detect spurious emissions radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data were supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph 2.1049(c) as appropriate. For equipment operating on frequencies below 890 MHz, an Open Field Test is normally required with the measuring instrument antenna located in the far field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurement will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections, which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with the reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

(b) Measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emission are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

The EUT (Remote RF Unit, RRU) was equipped with non-integral antenna. And it should test

according to part (b) of above section. The EUT was connected to match loads. The Console Computer controls the EUT to transmitter the maximum power which defined in specification of product. The EUT operated on a typical channel.

The test procedure

(1) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, E.R.P. shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC part 2.1033(c)(8). The EUT/RRU was connected to ancillary in order to simulate normal operating conditions with reference to the guidance given in the standard for this type of equipment.

(2) Test the radiated maximum output power by the test Receiver R&S ESMI received from test antenna.

(3) Use substitution method to verify the Maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a Signal Generator. And then adjust the output level of the Signal Generator to get the same received power recorded in step (2) on the test Receiver R&S ESMI, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

Frequency Search Range:

According to FCC part 2.1057, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Measurement bandwidth (RBW) for 9 kHz to 10th harmonic included: 1MHz;

Alternatively, according to ITU SM.329-10,

Measurement bandwidth (RBW) for 9 kHz up to 150 KHz: 1 kHz;

Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;

Measurement bandwidth (RBW) for 30 MHz up to 20 GHz: 1MHz;

Test setup

Step 1: Pre-test

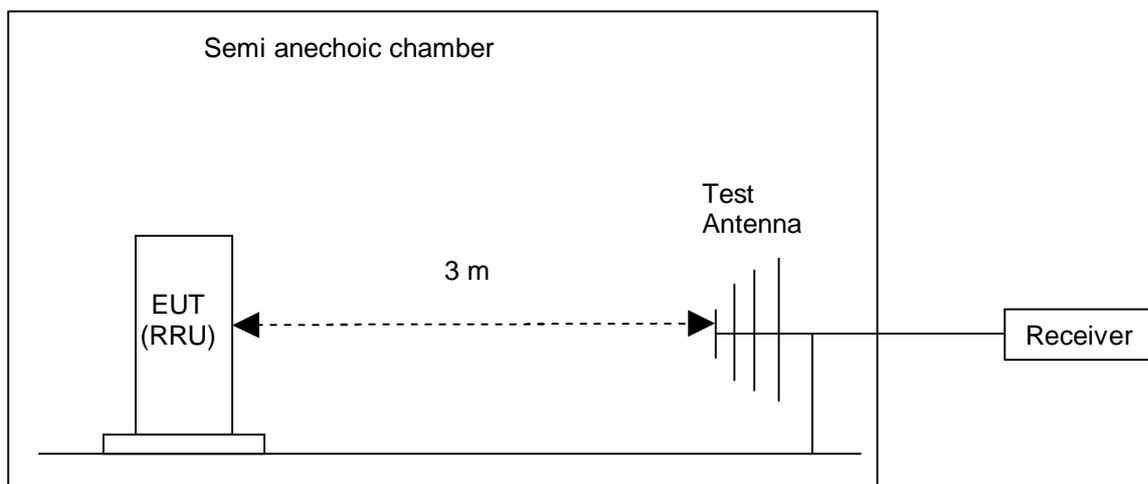


Figure 7. Test Set-up for Pre-test

Step 2: Substitution method to verify the maximum ERP

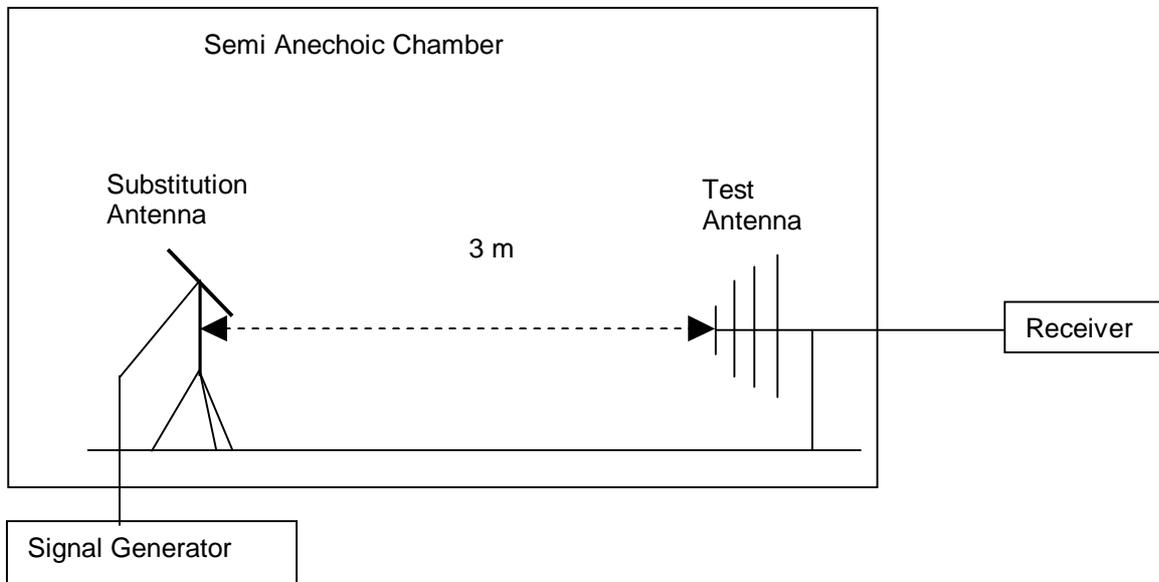


Figure 8. Test Set-up for Substitution

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

6.6.4 Measurement Results

6.6.4.1 Pre-test Measurement Results

table 47. Measurement Result

Channel Number	Test Range (Frequency)	Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel1000 1980MHz	30MHz ~18GHz	43	<- 13 dBm (See appendix E)	- 13 dBm	Pass

6.6.4.2 Substitution Results

table 48. Substitution Results

Freq. [MHz]	Measurement Value [dBm]	Substitution Antenna Type	Gain [dBd]	Cable Loss [dB]	Signal Generator Level [dBm]	Substitution Level [dBm]	FCC limit [dBm]	Result
/	/	/	/	/	/	/	/	/

Note: For get the ERP. (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$ERP [dBm] = SGP [dBm] - Cable Loss [dB] + Gain [dBd]$$

NOTE: SGP- Signal Generator Level

6.6.5 Conclusion

The equipment **PASSED** the requirement of this clause.
 For the measurement results refer to Appendix E.

6.7 Frequency Stability

6.7.1 Test Conditions

table 49. **Test Conditions**

Preconditioning:	1 hour
Measured at:	Antenna connector
Ambient temperature:	See below
Relative humidity (45 % to 85 %):	60 %
Air Pressure (86 kPa to 106 kPa):	101 kPa
Test Configuration/Mode:	PCS band at Channel M Multi Carriers: 1 under TM1, TM2,

6.7.2 Test Specifications and Limit

Compliance with FCC part 2.1055 and part 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

table 50. **FCC Limits for PCS Band**

Limit:	(not defended)
--------	----------------

In addition, limits according to the technical requirements of the EUT can be adopted as showed in the following table.

table 51. **Limits According to EUT technical requirements**

Limits for CDMA2000 equipments: (acc. to 3GPP2 C.S0010, C.S0032)	< ±0.05 ppm
---	-------------

6.7.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature from -30 °C to 50 °C. Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10 °C through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.
- (3) The supply voltage shall be measured at the input to the cable normally provided with the

equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

The test procedure

According to ANSI C63.4 clause 13.1.6, no modulation needs to be supplied to the intentional radiator during these tests, unless modulation is required to produce an output, e.g., single-sideband suppressed carrier transmitters.

The operating end points are: -48 VDC (normal point), -37 VDC (lowest point) and -60 VDC (highest point).

Test Set up

The EUT (Remote RF Unit, RRU) was connected to the Spectrum Analyzer or equivalent R&S FSQ40 via one RF connector, and other RF connectors were connected to match loads. The EUT was controlled to transmit maximum power by Console Computer. Measure and record the Frequency Tolerance of the EUT by the R&S FSQ40.

The EUT was placed inside an environmental temperature chamber.

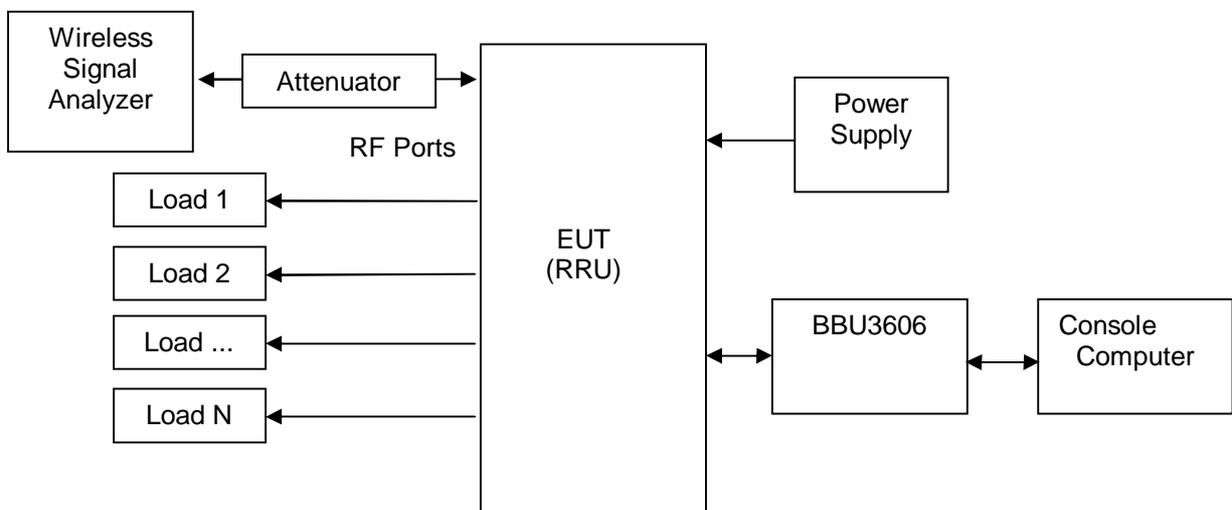


Figure 9. Test Set up

6.7.4 Measurement Results

6.7.4.1 Frequency Error vs. Temperature

TM1, ~48V DC Channel No. 1000(1980MHz)

table 52. Measurement Results for TM1

TEST CONDITIONS		Frequency Stability Middle Channel:1000 Frequency :1980MHz		
		Measured Max. Frequency Error		Limit (ppm)
		Hz	ppm	
V _{nom} (-48 VDC)	-30 °C	6	0.01	< ±0.05

	-20 °C	13	0.01	< ±0.05
	-10 °C	1	0.01	< ±0.05
	0 °C	-8	-0.01	< ±0.05
	+10 °C	8	0.01	< ±0.05
	+20 °C	5	0.01	< ±0.05
	+30 °C	3	0.01	< ±0.05
	+40 °C	1	0.01	< ±0.05
	+50 °C	2	0.01	< ±0.05

TM2, ~48V DC Channel No. 1000(1980MHz)

table 53. Measurement Results for TM2

TEST CONDITIONS		Frequency Stability Middle Channel:1000 Frequency :1980MHz		
		Measured Max. Frequency Error		Limit (ppm)
		Hz	ppm	
V _{nom} (-48 VDC)	-30 °C	-5	-0.01	< ±0.05
	-20 °C	9	0.01	< ±0.05
	-10 °C	7	0.01	< ±0.05
	0 °C	1	0.01	< ±0.05
	+10 °C	6	0.01	< ±0.05
	+20 °C	4	0.01	< ±0.05
	+30 °C	2	0.01	< ±0.05
	+40 °C	1	0.01	< ±0.05
	+50 °C	1	0.01	< ±0.05

6.7.4.2 Frequency Error vs. Voltage
TM1, 25 °C ,Channel No. 1000(1980MHz)

table 54. Measurement Results for CDMA TM1

TEST CONDITIONS		Frequency Stability Middle Channel:1000 Frequency :1980MHz		
		Measured Max. Frequency Error		Limit (ppm)
		Hz	ppm	
T _{nom} (22°C)	85%V _{nom} (-37 VDC)	-5	-0.01	< ±0.05
	100%V _{nom} (-48 VDC)	-1	-0.01	< ±0.05
	115%V _{nom} (-60 VDC)	3	0.01	< ±0.05

TM2, 25 °C ,Channel No. 1000(1980MHz)

table 55. Measurement Results for CDMA TM2



TEST CONDITIONS		Frequency Stability Middle Channel:1000 Frequency :1980MHz		
		Measured Max. Frequency Error		Limit (ppm)
		Hz	ppm	
T _{nom} (22°C)	85%V _{nom} (-37 VDC)	-1	-0.01	< ±0.05
	100%V _{nom} (-48 VDC)	7	0.01	< ±0.05
	115%V _{nom} (-60 VDC)	-3	-0.01	< ±0.05

6.7.5 Conclusion

The equipment **PASSED** the requirement of this clause.

7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

table 56. **System Measurement Uncertainty**

Items		Extended Uncertainty
Band Width	Magnitude (%)	U=0.2%; k=2
Band Edge Compliance	Disturbance Power (dBm)	U=2.0dB; k=2
Conducted Spurious Emission at Antenna Terminal	Disturbance Power (dBm)	U=2.0dB; k=2
Frequency Stability	Frequency Accuracy(ppm)	U=0.21ppm; k=2
Field Strength of Spurious Radiation	ERP (dBm)(30MHz~1G)	U=4.6dB; k=2
	ERP (dBm) (>1G)	U=3dB; k=2
Conducted Output Power	Power (dBm)	U=0.39dB; k=2



8 Appendices

Appendix A	Measurement Results Modulation Characteristics	10 Pages
Appendix B	Measurement Results Occupied Bandwidth	7 Pages
Appendix C	Measurement Results Band Edges	13 Pages
Appendix D	Measurement Results Spurious Emission at Antenna Terminal	37 Pages
Appendix E	Measurement Results Radiated Spurious Emission	3 Pages
Appendix F	Photos of Test Setup	3 Pages

----- END OF REPORT -----