



## FCC SAR Compliance Test Report

Project Name: HUAWEI MediaPad 10 Link

Model : S10-201L

FCC ID : QISS10-201L

Report No. : SYBH(Z-SAR)007062013-2

	APPROVED (Manager)	CHECKED	PREPARED
BY	<i>Liu Chunlin</i>	<i>Aluicway</i>	<i>gongzhong</i>
DATE	2013-06-20	2013-06-20	2013-06-20

The test results of this test report relate exclusively to the item(s) tested , The HUAWEI does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of HUAWEI.

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

## Table of Contents

1	General Information .....	5
1.1	Statement of Compliance .....	5
1.2	RF exposure limits .....	5
1.3	EUT Description .....	6
1.3.1	General Description .....	7
1.4	Test specification(s) .....	8
1.5	Testing laboratory .....	8
1.6	Applicant and Manufacturer .....	8
1.7	Application details .....	8
1.8	Ambient Condition .....	8
2	SAR Measurement System .....	9
2.1	SAR Measurement Set-up .....	9
2.2	Test environment .....	10
2.3	Data Acquisition Electronics description .....	10
2.4	Probe description .....	10
2.5	Phantom description .....	11
2.6	Device holder description .....	12
2.7	Test Equipment List .....	13
3	SAR Measurement Procedure .....	14
3.1	Scanning procedure .....	14
3.2	Spatial Peak SAR Evaluation .....	15
3.3	Data Storage and Evaluation .....	16
4	System Verification Procedure .....	18
4.1	Tissue Verification .....	18
4.2	System Check .....	20
4.3	System check Procedure .....	21
5	Measurement Uncertainty Evaluation .....	22
5.1	Measurement uncertainty evaluation for SAR test .....	22
5.2	Measurement uncertainty evaluation for system check .....	23
6	SAR Test Configuration .....	24
6.1	GSM Test Configuration .....	24
6.2	UMTS Test Configuration .....	24
6.3	LTE Test Configurations .....	30
6.4	WiFi Test Configuration .....	32
6.5	BT Test Configuration .....	33
7	SAR Measurement Results .....	34
7.1	Conducted power measurements .....	34
7.1.1	Conducted power measurements GSM850 .....	35
7.1.2	Conducted power measurements GSM1900 .....	35
7.1.3	Conducted power measurements UMTS Band V .....	36
7.1.4	Conducted power measurements UMTS Band II .....	36
7.1.5	Conducted power measurements LTE Band II .....	37
7.1.6	Conducted power measurements LTE Band V .....	40
7.1.7	Conducted power measurements LTE Band VII .....	41
7.1.8	Conducted power measurements WiFi 2.4G .....	43
7.1.9	Conducted power measurements WiFi 5G .....	44
7.1.10	Conducted power measurements BT .....	46
7.2	SAR measurement Result .....	47
7.2.1	SAR measurement Result of GSM850 .....	47
7.2.2	SAR measurement Result of GSM1900 .....	48
7.2.3	SAR measurement Result of UMTS Band V .....	49
7.2.4	SAR measurement Result of UMTS Band II .....	50
7.2.5	SAR measurement Result of LTE Band II .....	51
7.2.6	SAR measurement Result of LTE Band V .....	52
7.2.7	SAR measurement Result of LTE Band VII .....	53
7.2.8	SAR measurement Result of WiFi 2.4G .....	54
7.2.9	SAR measurement Result of WiFi 5G .....	55
7.2.10	SAR measurement Result BT .....	56
7.3	Multiple Transmitter Evaluation .....	57
7.3.1	Stand-alone SAR test exclusion .....	58

7.3.2	Simultaneous Transmission Possibilities .....	59
7.3.3	SAR Summation Scenario .....	59
7.3.4	SPLSR Evaluation Analysis.....	64
7.3.5	Simultaneous Transmission Conclution.....	75
Appendix A.	System Check Plots .....	76
Appendix B.	SAR Measurement Plots .....	76
Appendix C.	Calibration Certificate .....	76
Appendix D.	Photo documentation .....	76

※ ※ **Modified History** ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2013-06-20	Gong zhong

# 1 General Information

## 1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for S10-201L are as below Table 1.

Band	Position	MAX Reported SAR <sub>1g</sub> (W/kg)
GSM850	Body 0mm	1.431
GSM1900	Body 0mm	<b>1.459</b>
UMTS Band V	Body 0mm	1.071
UMTS Band II	Body 0mm	1.237
LTE Band II	Body 0mm	1.445
LTE Band V	Body 0mm	1.264
LTE Band VII	Body 0mm	1.446
WiFi 2.4G	Body 0mm	1.357
WiFi 5G	Body 0mm	0.798
BT	Body 0mm	0.061
The highest simultaneous SAR is 1.555W/kg per KDB690783 D01		

Table 1:Summary of test result

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits of 1.6 W/Kg as averaged over any 1 g tissue according to the FCC rule §2.1093, the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2003 & IEEE Std 1528a-2005 and FCC OET Bulletin 65 Supplement C Edition 01-01.

## 1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
<b>Spatial Peak SAR*</b> (Brain/Body/Arms/Legs)	<b>1.60 mW/g</b>	8.00 mW/g
<b>Spatial Average SAR**</b> (Whole Body)	0.08 mW/g	0.40 mW/g
<b>Spatial Peak SAR***</b> (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

### Notes:

\* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

\*\* The Spatial Average value of the SAR averaged over the whole body.

\*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.

### 1.3 EUT Description

Device Information:			
DUT Name:	HUAWEI MediaPad 10 Link		
Type Identification:	S10-201L		
FCC ID:	QISS10-201L		
SN No.:	Z3P01A9342000066		
Device Type :	portable device		
Device Phase:	Identical Prototype		
Exposure Category:	uncontrolled environment / general population		
Hardware Version :	SH1S10201LM		
Software Version :	S10-201L V100R001C001		
Antenna Type :	internal antenna		
Others Accessories	Headset		
Device Operating Configurations:			
Supporting Mode(s)	GSM850/1900, UMTS Band V/II, LTE Band II/V/VII,WiFi,BT(tested)		
Test Modulation	GSM(GMSK/8PSK),UMTS(QPSK),LTE(QPSK,16QAM),WiFi(OFDM) BT(GFSK,8DPSK, $\pi/4$ -DPSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band V	824-849	869-894
	UMTS Band II	1850-1910	1930-1990
	LTE Band II	1850-1910	1930-1990
	LTE Band V	824-849	869-894
	LTE Band VII	2500-2570	2620-2690
	BT	2400-2483.5	2400-2483.5
	WiFi 2.4G	2400-2483.5	2400-2483.5
	WiFi 5G	5150-5250	
		5250-5350	
		5470-5725	
		5725-5825	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink:		4
	Max Number of Timeslots in Downlink:		4
	Max Total Timeslot:		5
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink:		4
	Max Number of Timeslots in Downlink:		4
	Max Total Timeslot:		5
HSDPA UE Category:	14		
HSUPA UE Category:	6		
DC-HSDPA UE Category:	24		
Power Class:	4,tested with power level 5(GSM850)		
	1,tested with power level 0(GSM1900)		
	3, tested with power control “all 1”(UMTS Band V)		
	3, tested with power control “all 1”(UMTS Band II)		
	3, tested with power control all Max.(LTE Band II)		
	3, tested with power control all Max.(LTE Band V)		
	3, tested with power control all Max.(LTE Band VII)		
Test Channels (low-mid-high):	128-190-251 (GSM850)		
	512-661-810 (GSM1900)		
	4132-4182-4233 (UMTS Band V)		
	9262-9400-9538 (UMTS Band II)		
	18700-18900-19100(LTE Band II)		

	2450-20525-20600(LTE Band V)
	20850-21100-21350(LTE Band VII)
	1-6-11 (WiFi 2450)
	36-60-108-149(WiFi 5G)
	0-39-78(BT)

Table 3: Device information and operating configuration

Note:

1) 5600MHz-5650MHz is notched.

### 1.3.1 General Description

HUAWEI MediaPad 10 Link (MediaPad 10 Link for short) is a 10.1-inch tablet that incorporates Hislicon processor With support for LTE,3G,WI-FI and BT data connections,MediaPad 10 Link provides users with unprecedented access to high-speed internet services.

#### 1.4 Test specification(s)

ANSI Std C95.1-1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.( IEEE Std C95.1-1991)
IEEE Std 1528-2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE Std 1528a-2005	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)
OET Bulletin No. 65, Supplement C Edition 01-01– 2001	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields---Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 4 of March 2010)
KDB941225 D01	SAR test for 3G devices v02
KDB941225 D02	HSPA and 1x Advanced v02r02
KDB941225 D03	SAR Test Reduction GSM GPRS EDGE v01
KDB941225 D05	SAR for LTE Devices v02r02
KDB616217 D04	SAR for laptop and tablets v01r01
KDB248227 D01	SAR meas for 802.11 a/b/g v01r02
KDB447498 D01	General RF Exposure Guidance v05r01
KDB648474 D04	SAR Handsets Multi Xmitter and Ant v01r01
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r01
KDB865664 D02	SAR Reporting v01r01

#### 1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Zone K3,Huawei Industrial Base, Bantian Industry Area, Longgang District, Shenzhen, Guangdong, China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT #2174.01

#### 1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

#### 1.7 Application details

Start Date of test	2013-06-09
End Date of test	2013-06-17

#### 1.8 Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%



## 2.1 SAR Measurement Set-up



- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows XP.
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

## 2.2 Test environment

The DASY4 measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m<sup>3</sup>, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m<sup>2</sup> array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.


The system allows the measurement of SAR values larger than 0.005 mW/g.

## 2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.


### DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	


## 2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor ( $\pm 2$  dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

### Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

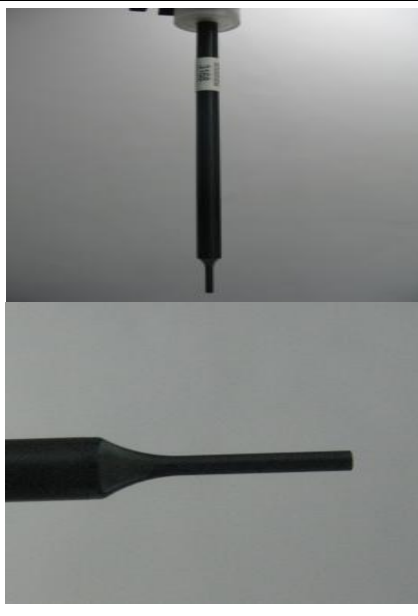
Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)	
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.3$ dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

### Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

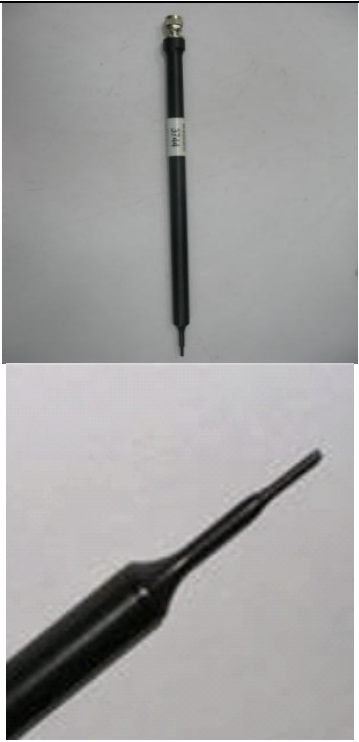Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)	
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB(noise:typically<1 $\mu$ W/g)	
Dimensions	Overall length: 337 mm (Tip:20 mm) Tip diameter:2.5 mm (Body:12 mm) Typical distance from probe tip to dipole centers: 1mm	
Application	High precision dosimetric measurements in any exposure scenario(e.g.,very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	


## 2.5 Phantom description

### SAM Twin Phantom

Shell Thickness	2mm +/- 0.2 mm; The ear region: 6mm	
Filling Volume	Approximately 30 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.  
A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

### ELI4 Phantom

Shell Thickness	2mm +/- 0.2 mm	
Filling Volume	Approximately 30 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Flat phantom	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

## 2.6 Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of  $65^\circ$ . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

## 2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment  
Devices used during the test described are marked ☒

	Manufacturer	Device	Type	Serial number	Date of last calibration )*	Valid period
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3736	2013-05-10	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	ES3DV3	3168	2012-10-02	One year
<input checked="" type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d059	2013-05-02	Three years
<input type="checkbox"/>	SPEAG	1800 MHz Dipole	D1800V2	2d184	2011-03-08	Three years
<input checked="" type="checkbox"/>	SPEAG	1900 MHz Dipole	D1900V2	5d143	2011-09-26	Three years
<input type="checkbox"/>	SPEAG	2000 MHz Dipole	D2000V2	1052	2011-03-10	Three years
<input type="checkbox"/>	SPEAG	2300 MHz Dipole	D2300V2	1016	2011-11-22	Three years
<input checked="" type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	860	2011-03-08	Three years
<input checked="" type="checkbox"/>	SPEAG	2600 MHz Dipole	D2600V2	1021	2011-11-22	Three years
<input checked="" type="checkbox"/>	SPEAG	5GHz Dipole	D5GHzV2	1040	2012-06-19	Three years
<input type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	852	2012-11-22	One year
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1305	2013-01-08	One year
<input checked="" type="checkbox"/>	SPEAG	Software	DASY 5	N/A	N/A	N/A
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM1	TP-1475	N/A	N/A
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM2	TP-1474	N/A	N/A
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM3	TP-1597	N/A	N/A
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM4	TP-1620	N/A	N/A
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI V5.0	TP-1038	N/A	N/A
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1111	N/A	N/A
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	111397	2012-08-13	One year
<input checked="" type="checkbox"/>	R & S	WideBand Radio Communication Tester	CMW 500	112936	2012-08-24	One year
<input checked="" type="checkbox"/>	Agilent)*	Network Analyser	E5071B	MY42404956	2013-02-27	One year
<input checked="" type="checkbox"/>	Agilent	Dielectric Probe Kit	85070E	2484	N/A	N/A
<input checked="" type="checkbox"/>	Agilent	Signal Generator	N5181A	MY47420989	2013-02-27	One year
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA0746001	N/A	N/A
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZVE-8G+	523101139	N/A	N/A
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4417A	MY45101339	2013-02-26	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY44420359	2013-02-26	One year

Note: All the test equipments are calibrated once a year, except the dipoles, which are calibrated every three years. Moreover, we have self-calibration every year to the dipoles.

1) Per KDB 450824 D02 requirements for dipole calibration, Huawei SAR lab has adopted three years calibration interval. But each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- There is no physical damage on the dipole;
- System check with specific dipole is within 10% of calibrated value;
- Return-loss is within 10% of calibrated measurement;
- Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

### 3 SAR Measurement Procedure

#### 3.1 Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)
- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ( $\leq 2\text{GHz}$ ), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution:  $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 4\text{GHz} - \leq 5\text{ mm}$  and  $4-6\text{ GHz} - \leq 4\text{ mm}$ ;  $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$ ,  $3-4\text{ GHz} - \leq 4\text{ mm}$  and  $4-6\text{GHz} - \leq 2\text{mm}$  where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.



### 3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 7 x 7 x 7 points. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

#### Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

#### Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff ].

#### Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

#### Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

### 3.3 Data Storage and Evaluation

#### Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with	V <sub>i</sub>	= compensated signal of channel i	(i = x, y, z)
	U <sub>i</sub>	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field (DASY parameter)	
	dcp <sub>i</sub>	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: 
$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$



H-field probes:  $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

with  $V_i$  = compensated signal of channel i (i = x, y, z)  
 $Norm_i$  = sensor sensitivity of channel i (i = x, y, z)  
 $[mV/(V/m)^2]$  for E-field Probes  
 $ConvF$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with  $SAR$  = local specific absorption rate in mW/g  
 $E_{tot}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  $P_{pwe}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>  
 $E_{tot}$  = total electric field strength in V/m  
 $H_{tot}$  = total magnetic field strength in A/m

## 4 System Verification Procedure

### 4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Body Tissue					
Frequency Band (MHz)	450	835	1800	1900	2450	2600
Water	51.16	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.49	1.40	0.13	0.13	0.04	0.024
Sugar	46.78	45.0	0.0	0.0	0.0	0.0
HEC	0.52	1.0	0.0	0.0	0.0	0.0
Bactericide	0.05	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M $\Omega$ + resistivity  
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]  
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

### Simulating Body Liquid for 5G, Manufactured by SPEAG:

Ingredients	(% by weight)
Water	60-80%
Esters, Emulsifiers, Inhibitors	20-40%
Sodium salt	0-1.5%

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		$\epsilon_r$ (+/-5%)	$\sigma$ (S/m) (+/-5%)	$\epsilon_r$	$\sigma$ (S/m)		
835B	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.12	0.972	21.4°C	2013-06-16
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.06	0.976		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	53.94	0.993		
1900B	1850	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.63	1.450	21.4°C	2013-06-15
	1880	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.58	1.482		
	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.54	1.503		
	1910	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.53	1.513		
2450B	2410	52.80 (50.16~55.44)	1.91 (1.81~2.00)	52.28	1.943	21.4°C	2013-06-17
	2435	52.70 (50.07~55.34)	1.94 (1.84~2.04)	52.12	1.979		
	2450	52.70 (50.07~55.34)	1.95 (1.85~2.05)	51.98	1.988		
	2460	52.70 (50.07~55.34)	1.96 (1.86~2.06)	52.08	2.018		
2600B	2510	52.62 (49.99~55.25)	2.03 (1.93~2.13)	53.23	2.056	21.4°C	2013-06-9
	2530	52.59 (49.96~55.22)	2.07 (1.97~2.17)	53.03	2.087		
	2550	52.57 (49.94~55.20)	2.09 (1.99~2.19)	53.04	2.107		
	2600	52.5 (49.88~55.13)	2.16 (2.05~2.27)	52.78	2.172		
5200B ~ 5800B	5200 Body	49.00 (44.10~53.90)	5.30 (4.77~5.83)	47.09	5.197	21.4°C	2013-06-14
	5500 Body	48.60 (43.74~53.46)	5.65 (5.08~6.21)	47.22	5.625	21.4°C	2013-06-14
	5800 Body	48.20 (43.38~53.02)	6.00 (5.4~6.6)	47.26	6.248	21.4°C	2013-06-14

$\epsilon_r$ = Relative permittivity,  $\sigma$ = Conductivity

Table 5: Measured Tissue Parameter

Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2) KDB 450824 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

## 4.2 System Check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests (Graphic Plot(s) see Appendix A).


System Check	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)		
D835V2 Body	9.42 (8.48~10.36)	6.19 (5.57~6.80)	10.08	6.64	21.4°C	2013-06-16
D1900V2 Body	41.40 (37.26~45.54)	21.80 (19.62~23.98)	41.20	21.00	21.4°C	2013-06-15
D2450V2 Body	52.80 (47.52~58.08)	24.50 (22.05~26.95)	57.20	25.56	21.4°C	2013-06-17
D2600V2 Body	55.60 (50.04~61.16)	24.90 (22.41~27.39)	60.80	26.80	21.4°C	2013-06-09
D5200V2 Body	73.1 (65.79~80.41)	20.5 (18.45~22.55)	74.30	21.00	21.4°C	2013-06-14
D5500V2 Body	78.1 (70.29~85.91)	21.7 (19.53~23.87)	78.30	21.90	21.4°C	2013-06-14
D5800V2 Body	73.8 (66.42~81.18)	20.4 (18.36~22.44)	74.80	21.00	21.4°C	2013-06-14

Table 6: System Check Results

### 4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW for frequencies below 5 GHz or 100 mW for frequencies above 5 GHz. To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

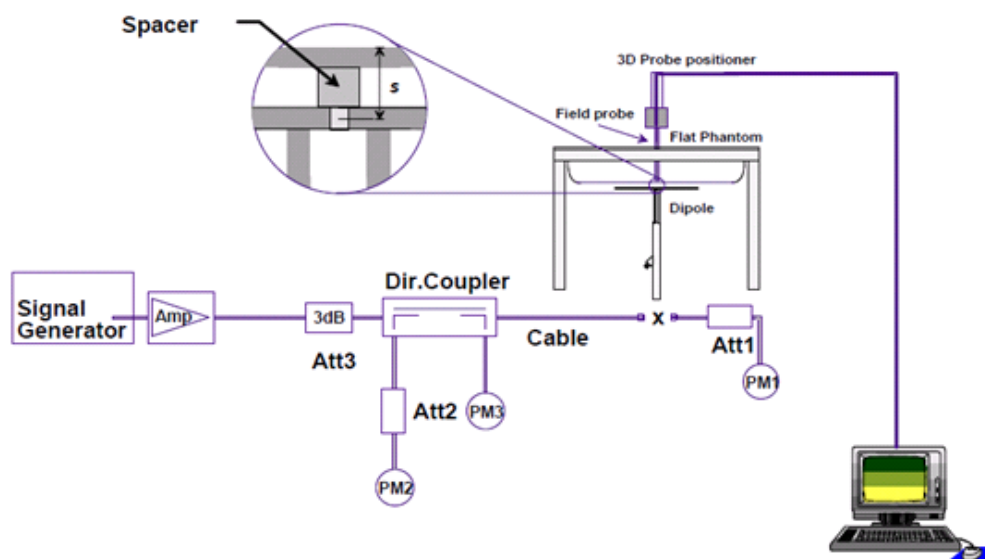

## 5 Measurement Uncertainty Evaluation

### 5.1 Measurement uncertainty evaluation for SAR test

The overall combined measurement uncertainty of the measurement system is  $\pm 10.9\%$  ( $K=1$ ).

The expanded uncertainty ( $k=2$ ) is assessed to be  $\pm 21.9\%$

This measurement uncertainty budget is suggested by IEEE P1528 and determined by Schmid & Partner Engineering AG. The breakdown of the individual uncertainties is as follows:

Error Sources	Uncertainty Value	Probability Distribution	Divisor	$c_i$ 1g	$c_i$ 10g	Standard Uncertainty 1g	Standard Uncertainty 10g	$v_i^2$ or $v_{eff}$
<b>Measurement System</b>								
Probe calibration	$\pm 6.0\%$	Normal	1	1	1	$\pm 6.0\%$	$\pm 6.0\%$	$\infty$
Axial isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9\%$	$\pm 1.9\%$	$\infty$
Hemispherical isotropy	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9\%$	$\pm 3.9\%$	$\infty$
Spatial resolution	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	$\infty$
Boundary effects	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	$\infty$
Probe linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	$\infty$
System detection limits	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	$\infty$
Readout electronics	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	$\infty$
Response time	$\pm 0.8\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$	$\infty$
Integration time	$\pm 2.6\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5\%$	$\pm 1.5\%$	$\infty$
RF ambient conditions	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	$\infty$
Probe positioner	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$	$\infty$
Probe positioning	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	$\infty$
Max. SAR evaluation	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	$\infty$
<b>Test Sample Related</b>								
Device positioning	$\pm 2.9\%$	Normal	1	1	1	$\pm 2.9\%$	$\pm 2.9\%$	145
Device holder uncertainty	$\pm 3.6\%$	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	5
Power drift	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	$\infty$
<b>Phantom and Set-up</b>								
Phantom uncertainty	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	$\infty$
Liquid conductivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	$\infty$
Liquid conductivity (meas.)	$\pm 2.5\%$	Normal	1	0.64	0.43	$\pm 1.6\%$	$\pm 1.1\%$	$\infty$
Liquid permittivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	$\infty$
Liquid permittivity (meas.)	$\pm 2.5\%$	Normal	1	0.6	0.49	$\pm 1.5\%$	$\pm 1.2\%$	$\infty$
<b>Combined Uncertainty</b>	$u_c = \sqrt{\sum_{i=1}^{21} u_i^2}$					$\pm 10.9\%$	$\pm 10.7\%$	387
<b>Expanded Std. Uncertainty</b>	$u_e = 2u_c$	Normal	<b>K=2</b>			$\pm 21.9\%$	$\pm 21.4\%$	

Table 7: Measurement uncertainties

## 5.2 Measurement uncertainty evaluation for system check

The overall combined measurement uncertainty of the measurement system is  $\pm 9.5\%$  ( $K=1$ ).

The expanded uncertainty ( $k=2$ ) is assessed to be  $\pm 18.9\%$

This measurement uncertainty budget is suggested by IEEE P1528 and determined by Schmid & Partner Engineering AG. The breakdown of the individual uncertainties is as follows:

Error Sources	Uncertainty Value	Probability Distribution	Divisor	$c_i$ 1g	$c_i$ 10g	Standard Uncertainty 1g	Standard Uncertainty 10g	$v_i^2$ or $v_{eff}$
<b>Measurement System</b>								
Probe calibration	$\pm 6.0\%$	Normal	1	1	1	$\pm 6.0\%$	$\pm 6.0\%$	$\infty$
Axial isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	$\infty$
Hemispherical isotropy	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 0.0\%$	$\pm 0.0\%$	$\infty$
Boundary effects	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	$\infty$
Probe linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	$\infty$
System detection limits	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	$\infty$
Readout electronics	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	$\infty$
Response time	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	$\infty$
Integration time	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	$\infty$
RF ambient conditions	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	$\infty$
Probe positioner	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$	$\infty$
Probe positioning	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	$\infty$
Max. SAR evaluation	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	$\infty$
<b>Dipole</b>								
Deviation of experimental dipole	$\pm 5.5\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 3.2\%$	$\pm 3.2\%$	$\infty$
Dipole axis to liquid distance	$\pm 2.0\%$	Rectangular	1	1	1	$\pm 1.2\%$	$\pm 1.2\%$	$\infty$
Power drift	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	$\infty$
<b>Phantom and Set-up</b>								
Phantom uncertainty	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	$\infty$
Liquid conductivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	$\infty$
Liquid conductivity (meas.)	$\pm 2.5\%$	Normal	1	0.64	0.43	$\pm 1.6\%$	$\pm 1.1\%$	$\infty$
Liquid permittivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	$\infty$
Liquid permittivity (meas.)	$\pm 2.5\%$	Normal	1	0.6	0.49	$\pm 1.5\%$	$\pm 1.2\%$	$\infty$
<b>Combined Uncertainty</b>	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					$\pm 9.5\%$	$\pm 9.2\%$	
<b>Expanded Std. Uncertainty</b>	$U_e = 2u_c$	Normal	<b>K=2</b>			$\pm 18.9\%$	$\pm 18.4\%$	

Table 8: Measurement uncertainties

## 6 SAR Test Configuration

### 6.1 GSM Test Configuration

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to “5” and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot.

The allowed power reduction in the multi-slot configuration is as following:

Number of timeslots in uplink assignment		Reduction of maximum output power (dB)		
Band	Time Slots	GPRS (GMSK)	EGPRS (GMSK)	EGPRS (8PSK)
GSM850	1 TX slot	0	0	0
	2 TX slots	2	2	2
	3 TX slots	4	4	4
	4 TX slots	6	6	6
GSM1900	1 TX slot	0	0	0
	2 TX slots	2	2	2
	3 TX slots	4	4	4
	4 TX slots	6	6	6

Table 9: The allowed power reduction in the multi-slot configuration of GSM

### 6.2 UMTS Test Configuration

#### 1) RMC

As the SAR body tests for UMTS Band V/II, we established the radio link through call processing. The maximum output power were verified on high, middle and low channels for each test band according to 3GPP TS 34.121 with the following configuration:

- 1) 12.2kbps RMC, 64,144,384 kbps RMC with TPC set to ‘all 1’.
- 2) Test loop Mode 1.

For the output power, the configurations for the DPCCH and DPDCH<sub>1</sub> are as followed (EUT do not support the DPDCH<sub>2-n</sub>)

	Channel Bit Rate (kbps)	Channel Symbol Rate (ksps)	Spreading Factor	Spreading Code Number	Bits/Slot
DPCCH	15	15	256	0	10
DPDCH <sub>1</sub>	15	15	256	64	10
	30	30	128	32	20
	60	60	64	16	40
	120	120	32	8	80
	240	240	16	4	160
	480	480	8	2	320
	960	960	4	1	640
DPDCH <sub>n</sub>	960	960	4	1, 2, 3	640



SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all “1s”. SAR for other spreading codes and multiple DPDCHn, when supported by the EUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCHn configuration, are less than ¼ dB higher than those measured in 12.2 kbps RMC.

## 2) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The  $\beta_c$  and  $\beta_d$  gain factors for DPCCH and DPDCH were set according to the values in the below table,  $\beta_{hs}$  for HS-DPCCH is set automatically to the correct value when  $\Delta ACK$ ,  $\Delta NACK$ ,  $\Delta CQI = 8$ . The variation of the  $\beta_c / \beta_d$  ratio causes a power reduction at sub-tests 2 - 4.

Sub-test <sup>1</sup>	$\beta_c$ <sup>2</sup>	$\beta_d$ <sup>2</sup>	$\beta_d$ (SF) <sup>2</sup>	$\beta_c / \beta_d$ <sup>2</sup>	$\beta_{hs}$ (1) <sup>2</sup>	CM(dB)(2) <sup>2</sup>	MPR (dB) <sup>2</sup>
1 <sup>2</sup>	2/15 <sup>2</sup>	15/15 <sup>2</sup>	64 <sup>2</sup>	2/15 <sup>2</sup>	4/15 <sup>2</sup>	0.0 <sup>2</sup>	0 <sup>2</sup>
2 <sup>2</sup>	12/15(3) <sup>2</sup>	15/15(3) <sup>2</sup>	64 <sup>2</sup>	12/15(3) <sup>2</sup>	24/15 <sup>2</sup>	1.0 <sup>2</sup>	0 <sup>2</sup>
3 <sup>2</sup>	15/15 <sup>2</sup>	8/15 <sup>2</sup>	64 <sup>2</sup>	15/8 <sup>2</sup>	30/15 <sup>2</sup>	1.5 <sup>2</sup>	0.5 <sup>2</sup>
4 <sup>2</sup>	15/15 <sup>2</sup>	4/15 <sup>2</sup>	64 <sup>2</sup>	15/4 <sup>2</sup>	30/15 <sup>2</sup>	1.5 <sup>2</sup>	0.5 <sup>2</sup>

Note 1:  $\Delta ACK$ ,  $\Delta NACK$  and  $\Delta CQI = 8$       $A_{hs} = \beta_{hs} / \beta_c = 30/15$       $\beta_{hs} = 30/15 * \beta_c$   
Note 2: CM=1 for  $\beta_c / \beta_d = 12/15$ ,  $\beta_{hs} / \beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.<sup>2</sup>  
Note 3: For subtest 2 the  $\beta_c / \beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ <sup>2</sup>

Table 10: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 11: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 12:HSDPA UE category

### 3) HSUPA

Body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-set 1 and QPSK for FRC and 12.2kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Device' sections of 3G device.

Sub-test <sup>⌘</sup>	$\beta_c$ <sup>⌘</sup>	$\beta_d$ <sup>⌘</sup>	$\beta_d$ (SF) <sup>⌘</sup>	$\beta_c/\beta_d$ <sup>⌘</sup>	$\beta_{hs}^{(1)}$ <sup>⌘</sup>	$\beta_{ac}$ <sup>⌘</sup>	$\beta_{ad}$ <sup>⌘</sup>	$\beta_c$ (SF) <sup>⌘</sup>	$\beta_{ad}$ (code) <sup>⌘</sup>	CM <sup>(2)</sup> (dB) <sup>⌘</sup>	MP R <sup>⌘</sup> (dB) <sup>⌘</sup>	AG <sup>(4)</sup> Inde x <sup>⌘</sup>	E- TFC I <sup>⌘</sup>
1 <sup>⌘</sup>	11/15 <sup>(3)</sup> <sup>⌘</sup>	15/15 <sup>(3)</sup> <sup>⌘</sup>	64 <sup>⌘</sup>	11/15 <sup>(3)</sup> <sup>⌘</sup>	22/15 <sup>⌘</sup>	209/225 <sup>⌘</sup>	1039/225 <sup>⌘</sup>	4 <sup>⌘</sup>	1 <sup>⌘</sup>	1.0 <sup>⌘</sup>	0.0 <sup>⌘</sup>	20 <sup>⌘</sup>	75 <sup>⌘</sup>
2 <sup>⌘</sup>	6/15 <sup>⌘</sup>	15/15 <sup>⌘</sup>	64 <sup>⌘</sup>	6/15 <sup>⌘</sup>	12/15 <sup>⌘</sup>	12/15 <sup>⌘</sup>	94/75 <sup>⌘</sup>	4 <sup>⌘</sup>	1 <sup>⌘</sup>	3.0 <sup>⌘</sup>	2.0 <sup>⌘</sup>	12 <sup>⌘</sup>	67 <sup>⌘</sup>
3 <sup>⌘</sup>	15/15 <sup>⌘</sup>	9/15 <sup>⌘</sup>	64 <sup>⌘</sup>	15/9 <sup>⌘</sup>	30/15 <sup>⌘</sup>	30/15 <sup>⌘</sup>	$\beta_{ad1}:47/15$ <sup>⌘</sup> $\beta_{ad2}:47/15$ <sup>⌘</sup>	4 <sup>⌘</sup>	2 <sup>⌘</sup>	2.0 <sup>⌘</sup>	1.0 <sup>⌘</sup>	15 <sup>⌘</sup>	92 <sup>⌘</sup>
4 <sup>⌘</sup>	2/15 <sup>⌘</sup>	15/15 <sup>⌘</sup>	64 <sup>⌘</sup>	2/15 <sup>⌘</sup>	4/15 <sup>⌘</sup>	2/15 <sup>⌘</sup>	56/75 <sup>⌘</sup>	4 <sup>⌘</sup>	1 <sup>⌘</sup>	3.0 <sup>⌘</sup>	2.0 <sup>⌘</sup>	17 <sup>⌘</sup>	71 <sup>⌘</sup>
5 <sup>⌘</sup>	15/15 <sup>(4)</sup> <sup>⌘</sup>	15/15 <sup>(4)</sup> <sup>⌘</sup>	64 <sup>⌘</sup>	15/15 <sup>(4)</sup> <sup>⌘</sup>	30/15 <sup>⌘</sup>	24/15 <sup>⌘</sup>	134/15 <sup>⌘</sup>	4 <sup>⌘</sup>	1 <sup>⌘</sup>	1.0 <sup>⌘</sup>	0.0 <sup>⌘</sup>	21 <sup>⌘</sup>	81 <sup>⌘</sup>
<p>Note 1: <math>\Delta ACK</math>, <math>\Delta NACK</math> and <math>\Delta CQI=8</math>     <math>A_{hs} = \beta_{hs}/\beta_c = 30/15</math>     <math>\beta_{hs} = 30/15 * \beta_c</math></p> <p>Note 2: CM = 1 for <math>\beta_c/\beta_d = 12/15</math>, <math>\beta_{hs}/\beta_c = 24/15</math>. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference<sup>⌘</sup></p> <p>Note 3 : For subtest 1 the <math>\beta_c/\beta_d</math> ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to <math>\beta_c = 10/15</math> and <math>\beta_d = 15/15</math><sup>⌘</sup></p> <p>Note 4 : For subtest 5 the <math>\beta_c/\beta_d</math> ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to <math>\beta_c = 14/15</math> and <math>\beta_d = 15/15</math><sup>⌘</sup></p> <p>Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g<sup>⌘</sup></p> <p>Note 6: <math>\beta_{ad}</math> can not be set directly; it is set by Absolute Grant Value.<sup>⌘</sup></p>													

Table 13:Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).

Table 14:HSUPA UE category

#### 4) DC-HSDPA

In DC-HSDPA implementation of this device, the uplink parameters are the same as HSDPA. No additional channels and modulations (16 QAM, and 64 QAM) are supported in uplink. The difference is only in the downlink parameters, where two carriers are supported. HSDPA settings were used on uplink.

For Rel. 8 DC-HSDPA apply the four subtests from HSDPA Release 5 except use fixed reference channel H-Set 12 for DC-HSDPA. And we can apply the same SAR test exclusion criteria used for Rel. 6 HSPA for Rel. 7 HSPA+ and Rel. 8 DC-HSDPA. That is, if the HSPA, HSPA+, or the DC-HSDPA maximum output is not more than 0.25 dB higher than UMTS, SAR measurement for those modes is not required.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

**Table E.5.0: Levels for HSDPA connection setup**

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/lor	dB	-10
P-CCPCH and SCH_Ec/lor	dB	-12
PICH_Ec/lor	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/lor	dB	-5
OCNS_Ec/lor	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.


The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 15: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

- 1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
- 2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

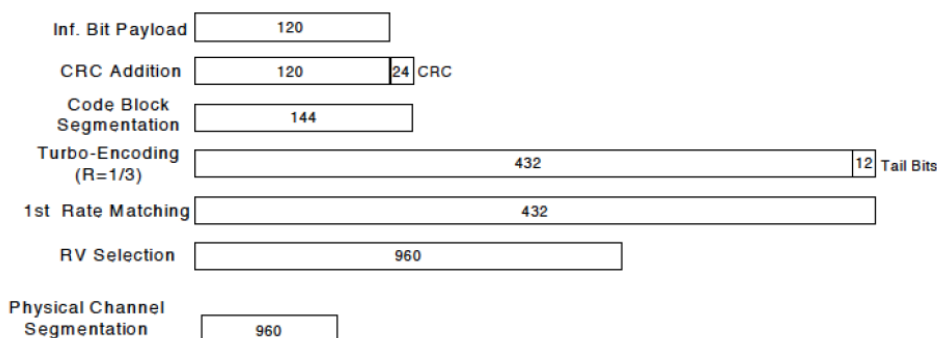

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test <sup>1</sup>	$\beta_c$ <sup>2</sup>	$\beta_d$ <sup>2</sup>	$\beta_d$ (SF) <sup>2</sup>	$\beta_c/\beta_d$ <sup>2</sup>	$\beta_{hs}(1)$ <sup>2</sup>	CM(dB)(2) <sup>2</sup>	MPR (dB) <sup>2</sup>
1 <sup>2</sup>	2/15 <sup>2</sup>	15/15 <sup>2</sup>	64 <sup>2</sup>	2/15 <sup>2</sup>	4/15 <sup>2</sup>	0.0 <sup>2</sup>	0 <sup>2</sup>
2 <sup>2</sup>	12/15(3) <sup>2</sup>	15/15(3) <sup>2</sup>	64 <sup>2</sup>	12/15(3) <sup>2</sup>	24/15 <sup>2</sup>	1.0 <sup>2</sup>	0 <sup>2</sup>
3 <sup>2</sup>	15/15 <sup>2</sup>	8/15 <sup>2</sup>	64 <sup>2</sup>	15/8 <sup>2</sup>	30/15 <sup>2</sup>	1.5 <sup>2</sup>	0.5 <sup>2</sup>
4 <sup>2</sup>	15/15 <sup>2</sup>	4/15 <sup>2</sup>	64 <sup>2</sup>	15/4 <sup>2</sup>	30/15 <sup>2</sup>	1.5 <sup>2</sup>	0.5 <sup>2</sup>
Note 1: $\Delta$ ACK, $\Delta$ NACK and $\Delta$ CQI=8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ Note 2: CM=1 for $\beta_c/\beta_d = 12/15$ , $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 3: For subtest 2 the $\beta_c/\beta_d$ ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$							

Up commands are set continuously to set the UE to Max power.

Note:

- 1.The Dual Carriers transmission only applies to HSDPA physical channels
- 2.The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4.The Dual Carriers operate in the same frequency band .
- 5.The device support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
- 6.The device don't support carrier aggregation for its release version is Release 8.

### 6.3 LTE Test Configurations

SAR for LTE band exposure configurations is measured according to the Procedures of KDB941225 D05. The CMW500 Wide Band Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed (see 3GPP standards) for the channel bandwidth and modulation combinations may be tested with MPR. Configurations with RB allocations below the required RB thresholds must be tested without MPR. A-MPR must always be disabled.

LTE Band II MPR as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR
	1.4	3	5	10	15	20	
	MHz	MHz	MHz	MHz	MHz	MHz	
QPSK	1	1	1	1	1	1	0
QPSK	≤ 3	≤ 6	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 3	> 6	> 8	> 12	> 16	> 18	0
16 QAM	≤ 3	≤ 6	≤ 8	≤ 12	≤ 16	≤ 18	0
16 QAM	> 3	> 6	> 8	> 12	> 16	> 18	0.5

LTE Band V MPR as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR
	1.4	3	5	10	15	20	
	MHz	MHz	MHz	MHz	MHz	MHz	
QPSK	1	1	1	1	1	1	0
QPSK	≤ 3	≤ 6	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 3	> 6	> 8	> 12	> 16	> 18	1
16 QAM	≤ 3	≤ 6	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 3	> 6	> 8	> 12	> 16	> 18	1.5

LTE Band VII MPR as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]				MPR
	5	10	15	20	
	MHz	MHz	MHz	MHz	
QPSK	1	1	1	1	0
QPSK	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 8	> 12	> 16	> 18	1
16 QAM	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 8	> 12	> 16	> 18	2

**A) Largest channel bandwidth standalone SAR test requirements****1) QPSK with 1 RB allocation**

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

**2) QPSK with 50% RB allocation**

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

**3) QPSK with 100% RB allocation**

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

**4) Higher order modulations**

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

**B) Other channel bandwidth standalone SAR test requirements**

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> \frac{1}{2}$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.



## 6.4 WiFi Test Configuration

For the 802.11b/g SAR tests, a communication link is set up with the test mode software for WiFi mode test. The Absolute Radio Frequency Channel Number(ARFCN) is allocated to 1 ,6 and 11 respectively in the case of 2450 MHz.During the test,at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate.

802.11b/g operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g modes are tested on channel 1, 6, 11; however,if output power reduction is necessary for channels 1 and/or 11 to meet restricted band requirements the highest output channel closest to each of these channels must be tested instead.

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

Mode	Band	GHz	Channel	“Default Test Channels”	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1#	√	△
		2.437	6	√	△
		2.462	11#	√	△

Notes:

√ = “default test channels”

△= possible 802.11g channels with maximum average output ¼ dB the “default test channels”

# = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

802.11 Test Channels per FCC Requirements

For the 802.11a SAR tests, a communication link is set up with the test mode software for WiFi mode test. 802.11a operating modes are tested independently according to the service requirements in each 5G WiFi frequency band. During the test,at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate.

Per KDB248227,for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate. When 802.11n-HT20 and 11n-HT40 output power is less than 0.25dB higher than 802.11a, the SAR can be excluded.



## 6.5 BT Test Configuration

For BT SAR testing, the EUT's BT test mode is open and the EUT is connected with CMU200 which provides continuous transmitting RF signal with maximum output power. The CMU200 controls the EUT operating at 2441MHz(39CH) with hopping off, and data rate is set for HD5. This RF signal utilized in SAR measurement has almost 100% duty cycle and crest factor is 1.

## 7 SAR Measurement Results

### 7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200 was used.

SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

Note: CMU200 measures GSM peak and average output power for active timeslots. For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
timebased avg. power compared to slotted avg. power	-9.19dB	-6.13dB	-4.42dB	-3.18dB

The signalling modes differ as follows:

mode	coding scheme	modulation
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

### 7.1.1 Conducted power measurements GSM850

GSM850		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		128CH	190CH	251CH		128CH	190CH	251CH
GSM (CS)		32.73	32.80	32.83	-9.19	23.54	23.61	23.64
GPRS (GMSK)	1 Tx Slot	32.71	32.83	32.86	-9.19	23.52	23.64	23.67
	2 Tx Slots	31.65	31.72	31.50	-6.13	<b>25.52</b>	<b>25.59</b>	<b>25.37</b>
	3 Tx Slots	29.32	29.42	29.51	-4.42	24.90	25.00	25.09
	4 Tx Slots	27.28	27.42	27.53	-3.18	24.10	24.24	24.35
EDGE (GMSK)	1 Tx Slot	32.72	32.85	32.86	-9.19	23.53	23.66	23.67
	2 Tx Slots	31.25	31.40	31.50	-6.13	25.12	25.27	25.37
	3 Tx Slots	29.33	29.41	29.48	-4.42	24.91	24.99	25.06
	4 Tx Slots	27.29	27.45	27.53	-3.18	24.11	24.27	24.35
EDGE (8PSK)	1 Tx Slot	26.84	26.69	26.49	-9.19	17.65	17.50	17.30
	2 Tx Slots	25.01	24.86	24.75	-6.13	18.88	18.73	18.62
	3 Tx Slots	22.82	22.60	22.49	-4.42	18.40	18.18	18.07
	4 Tx Slots	20.85	20.76	20.54	-3.18	17.67	17.58	17.36

Table 16:Test results conducted power measurement GSM850

Note: 1) The conducted power of GSM850 is measured with RMS detector.

2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

3) Per KDB 941225 D03v01,the bolded GPRS 2Ts slots mode was selected for SAR testing according to the highest frame-averaged output power table.

### 7.1.2 Conducted power measurements GSM1900

GSM1900		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
GSM (CS)		30.00	29.87	29.76	-9.19	20.81	20.68	20.57
GPRS (GMSK)	1 Tx Slot	29.98	29.85	29.73	-9.19	20.79	20.66	20.54
	2 Tx Slots	28.50	28.43	28.50	<b>-6.13</b>	<b>22.37</b>	<b>22.30</b>	<b>22.37</b>
	3 Tx Slots	26.39	26.31	26.23	-4.42	21.97	21.89	21.81
	4 Tx Slots	24.44	24.39	24.34	-3.18	21.26	21.21	21.16
EDGE (GMSK)	1 Tx Slot	29.99	29.86	29.71	-9.19	20.80	20.67	20.52
	2 Tx Slots	28.38	28.29	28.21	-6.13	22.25	22.16	22.08
	3 Tx Slots	26.41	26.32	26.24	-4.42	21.99	21.90	21.82
	4 Tx Slots	24.41	24.37	24.33	-3.18	21.23	21.19	21.15
EDGE (8PSK)	1 Tx Slot	25.74	25.49	25.26	-9.19	16.55	16.30	16.07
	2 Tx Slots	24.06	23.87	23.65	-6.13	17.93	17.74	17.52
	3 Tx Slots	22.00	21.90	21.68	-4.42	17.58	17.48	17.26
	4 Tx Slots	19.79	19.65	19.47	-3.18	16.61	16.47	16.29

Table 17:Test results conducted power measurement GSM1900

Note: 1) The conducted power of GSM1900 is measured with RMS detector.

2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

3) Per KDB 941225 D03v01,the bolded GPRS 2Ts slots mode was selected for SAR testing according to the highest frame-averaged output power table.

### 7.1.3 Conducted power measurements UMTS Band V

UMTS Band V		Conducted Power (dBm)		
		4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	23.02	22.95	23.04
	64kbps RMC	22.92	22.90	22.94
	144kbps RMC	22.98	22.93	22.98
	384kbps RMC	22.92	22.99	22.96
HSDPA	Subtest 1	22.93	22.98	22.88
	Subtest 2	22.72	22.77	22.85
	Subtest 3	22.29	22.34	22.39
	Subtest 4	22.35	22.41	22.29
DC-HSDPA	Subtest 1	22.71	22.50	22.20
	Subtest 2	22.42	22.09	22.16
	Subtest 3	22.15	22.19	22.27
	Subtest 4	22.06	22.26	21.86
HSUPA	Subtest 1	22.04	22.01	21.96
	Subtest 2	21.10	20.97	21.00
	Subtest 3	22.05	21.99	21.97
	Subtest 4	21.86	21.57	21.44
	Subtest 5	22.08	21.98	21.98

Table 18:Test results conducted power measurement UMTS Band V

Note: The conducted power of UMTS Band V is measured with RMS detector.

### 7.1.4 Conducted power measurements UMTS Band II

UMTS Band II		Conducted Power (dBm)		
		9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	22.78	22.64	22.95
	64kbps RMC	22.77	22.71	22.79
	144kbps RMC	22.78	22.66	22.75
	384kbps RMC	22.74	22.74	22.72
HSDPA	Subtest 1	22.77	22.68	22.79
	Subtest 2	22.67	22.72	22.80
	Subtest 3	22.36	22.39	22.56
	Subtest 4	22.42	22.52	22.60
DC-HSDPA	Subtest 1	22.71	22.43	22.09
	Subtest 2	22.33	22.28	22.03
	Subtest 3	21.93	21.94	21.53
	Subtest 4	21.94	21.65	21.62
HSUPA	Subtest 1	21.92	21.92	21.95
	Subtest 2	21.65	21.80	21.92
	Subtest 3	21.41	21.45	21.54
	Subtest 4	20.80	20.83	20.82
	Subtest 5	20.91	20.95	20.93

Table 19:Test results conducted power measurement UMTS Band II

Note: The conducted power of UMTS Band II is measured with RMS detector.

### 7.1.5 Conducted power measurements LTE Band II

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18607	18900	19193
1.4MHz	QPSK	1	0	22.77	22.78	22.49
		1	3	22.78	22.97	22.71
		1	5	22.58	22.81	22.57
		3	0	22.70	22.81	22.64
		3	2	22.65	22.88	<b>22.71</b>
		3	3	22.59	22.79	22.65
		6	0	22.57	22.83	22.61
	16QAM	1	0	22.34	22.57	22.23
		1	3	22.39	22.64	22.44
		1	5	22.17	22.55	22.33
		3	0	22.16	22.32	22.31
		3	2	22.15	22.41	22.36
		3	3	22.06	22.35	22.31
		6	0	22.03	22.34	22.25
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18615	18900	19185
3MHz	QPSK	1	0	22.22	22.33	22.26
		1	8	22.28	22.69	22.50
		1	14	21.89	22.30	<b>22.37</b>
		7	0	22.22	22.56	22.35
		7	4	22.14	22.58	22.42
		7	7	22.01	22.42	22.48
		15	0	22.12	22.55	22.36
	16QAM	1	0	22.22	22.36	22.17
		1	8	22.30	22.66	22.32
		1	14	21.97	22.29	22.24
		7	0	22.03	22.37	22.06
		7	4	21.96	22.44	22.19
		7	7	21.84	22.30	22.18
		15	0	21.89	22.33	22.08

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18625	18900	19175
5MHz	QPSK	1	0	22.34	22.43	<b>22.15</b>
		1	13	22.35	22.74	22.44
		1	24	21.95	22.39	22.33
		12	0	22.28	22.55	22.38
		12	6	22.30	22.63	22.45
		12	13	22.17	22.56	22.36
		25	0	22.19	22.59	22.36
	16QAM	1	0	21.99	22.24	22.06
		1	13	22.06	22.53	22.33
		1	24	21.70	22.18	22.21
		12	0	21.88	22.20	22.08
		12	6	21.91	22.28	22.13
		12	13	21.79	22.21	22.05
		25	0	21.91	22.26	22.05
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18650	18900	19150
10MHz	QPSK	1	0	21.93	22.15	21.72
		1	25	22.28	22.67	22.54
		1	49	21.92	22.32	<b>22.43</b>
		25	0	21.84	22.27	21.99
		25	13	22.09	22.52	22.34
		25	25	21.80	22.25	22.12
		50	0	21.76	22.33	22.06
	16QAM	1	0	21.95	22.31	21.82
		1	25	22.28	22.77	22.55
		1	49	22.04	22.45	22.45
		25	0	21.59	22.02	21.80
		25	13	21.88	22.27	22.13
		25	25	21.57	22.03	21.90
		50	0	21.50	22.04	21.80

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18675	18900	19125
15MHz	QPSK	1	0	22.25	22.33	21.79
		1	38	22.34	22.71	22.34
		1	74	22.13	22.35	22.47
		36	0	22.07	22.44	21.89
		36	18	22.22	22.63	22.10
		36	39	22.06	22.41	22.20
		75	0	21.94	22.49	21.98
	16QAM	1	0	21.92	22.19	21.71
		1	38	22.14	22.55	22.27
		1	74	21.99	22.21	22.34
		36	0	21.64	22.09	21.63
		36	18	21.84	22.28	21.85
		36	39	21.73	22.08	21.90
		75	0	21.59	22.16	21.71
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18700	18900	19100
20MHz	QPSK	1	0	21.96	22.08	21.69
		1	50	22.12	22.63	22.13
		1	99	22.38	22.08	22.54
		50	0	21.84	22.27	21.87
		50	25	21.89	22.49	21.99
		50	50	21.80	22.19	22.13
		100	0	21.91	22.32	21.85
	16QAM	1	0	22.01	22.08	21.60
		1	50	22.21	22.57	22.02
		1	99	22.36	22.05	22.16
		50	0	21.62	22.04	21.67
		50	25	21.67	22.27	21.80
		50	50	21.61	21.98	21.90
		100	0	21.73	22.09	21.67

Table 20:Test results conducted power measurement LTE Band II.

Note: The conducted power of LTE Band II is measured with RMS detector.

### 7.1.6 Conducted power measurements LTE Band V

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20407	20525	20643
1.4MHz	QPSK	1	0	23.23	23.36	23.34
		1	3	23.40	23.43	23.46
		1	5	23.30	23.36	23.23
		3	0	23.30	23.42	23.38
		3	2	23.33	23.42	23.40
		3	3	23.34	23.40	23.31
		6	0	22.45	22.54	22.49
	16QAM	1	0	22.48	22.42	22.51
		1	3	22.68	22.54	22.56
		1	5	22.57	22.33	22.56
		3	0	22.46	22.57	22.51
		3	2	22.53	22.70	22.50
		3	3	22.49	22.56	22.41
		6	0	21.28	21.31	21.22
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20415	20525	20635
3MHz	QPSK	1	0	23.14	23.38	23.24
		1	8	23.52	23.60	23.45
		1	14	23.23	23.19	23.09
		7	0	22.47	22.59	22.36
		7	4	22.47	22.60	22.46
		7	7	22.46	22.49	22.44
		15	0	22.41	22.55	22.39
	16QAM	1	0	22.36	22.70	22.39
		1	8	22.86	22.64	22.63
		1	14	22.60	22.26	22.40
		7	0	21.22	21.36	21.28
		7	4	21.29	21.34	21.27
		7	7	21.20	21.26	21.29
		15	0	21.17	21.24	21.19
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20425	20525	20625
5MHz	QPSK	1	0	23.05	23.26	23.38
		1	13	23.43	23.53	23.35
		1	24	23.21	23.24	23.07
		12	0	22.36	22.58	22.48
		12	6	22.53	22.65	22.49
		12	13	22.49	22.51	22.37
		25	0	22.42	22.54	22.39
	16QAM	1	0	22.24	22.24	22.29
		1	13	22.59	22.56	22.34
		1	24	22.40	22.21	22.05
		12	0	21.14	21.34	21.30
		12	6	21.32	21.40	21.32



		12	13	21.25	21.23	21.10
		25	0	21.23	21.24	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20450	20525	20600
10MHz	QPSK	1	0	22.90	23.13	23.04
		1	25	23.59	23.55	23.69
		1	49	23.29	23.25	23.15
		25	0	22.33	22.36	22.31
		25	13	22.58	22.56	22.48
		25	25	22.46	22.35	22.19
		50	0	22.34	22.30	22.23
	16QAM	1	0	22.12	22.43	22.22
		1	25	22.89	22.93	22.91
		1	49	22.56	22.59	22.44
		25	0	20.96	21.01	21.00
		25	13	21.20	21.24	21.29
		25	25	21.07	21.03	21.03
		50	0	21.01	21.01	21.03

Table 21:Test results conducted power measurement LTE Band V.

Note: The conducted power of LTE Band V is measured with RMS detector.

### 7.1.7 Conducted power measurements LTE Band VII

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20775	21100	21425
5MHz	QPSK	1	0	22.25	22.65	22.92
		1	13	22.65	22.95	23.29
		1	24	22.34	22.73	22.98
		12	0	21.77	21.98	22.18
		12	6	21.85	22.15	22.33
		12	13	21.75	22.00	22.28
		25	0	21.73	21.91	22.13
	16QAM	1	0	21.14	21.48	21.81
		1	13	21.56	21.82	22.22
		1	24	21.27	21.54	21.88
		12	0	20.27	20.69	21.00
		12	6	20.37	20.89	21.15
		12	13	20.28	20.73	21.12
		25	0	20.28	20.58	20.93
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20800	21100	21400
10MHz	QPSK	1	0	22.03	22.29	22.47
		1	25	22.46	22.89	23.14
		1	49	22.34	22.83	22.81
		25	0	21.40	21.62	21.69
		25	13	21.50	21.84	22.07
		25	25	21.35	21.73	21.81
		50	0	21.48	21.62	21.73

	16QAM	1	0	21.12	21.49	21.37
		1	25	21.65	22.19	22.07
		1	49	21.53	22.12	21.99
		25	0	20.11	20.40	20.45
		25	13	20.27	20.63	20.83
		25	25	20.10	20.54	20.67
		50	0	20.24	20.40	20.57
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20825	21100	21375
15MHz	QPSK	1	0	22.38	22.25	22.41
		1	38	22.67	22.92	23.02
		1	74	22.46	22.70	23.03
		36	0	21.72	21.76	21.72
		36	18	21.67	22.01	22.00
		36	39	21.48	21.92	21.92
		75	0	21.60	21.77	21.94
	16QAM	1	0	21.48	21.53	21.66
		1	38	21.86	22.23	22.25
		1	74	21.61	22.05	22.26
		36	0	20.45	20.55	20.48
		36	18	20.45	20.83	20.78
		36	39	20.29	20.77	20.80
		75	0	20.38	20.55	20.73
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20850	21100	21350
20MHz	QPSK	1	0	22.44	22.19	22.57
		1	50	22.64	22.95	22.99
		1	99	22.43	22.83	22.94
		50	0	21.62	21.56	21.88
		50	25	21.57	21.87	22.08
		50	50	21.39	21.83	21.89
		100	0	21.58	21.75	21.93
	16QAM	1	0	21.68	21.43	21.96
		1	50	21.88	22.18	22.29
		1	99	21.69	22.12	22.54
		50	0	20.39	20.33	20.65
		50	25	20.35	20.68	20.86
		50	50	20.21	20.64	20.65
		100	0	20.40	20.55	20.76

Table 22:Test results conducted power measurement LTE Band VII.

Note: The conducted power of LTE Band VII is measured with RMS detector.

### 7.1.8 Conducted power measurements WiFi 2.4G

Wi-Fi 2450	Channel	Average Power (dBm) for Data Rates (Mbps)							
		1	2	5.5	11	/	/	/	/
802.11b	1	14.80	14.60	14.30	14.10	/	/	/	/
	6	14.83	14.86	14.32	14.20	/	/	/	/
	11	14.48	14.39	14.26	14.18	/	/	/	/
802.11g	Channel	6	9	12	18	24	36	48	54
	1	13.80	13.47	13.61	13.41	13.16	13.15	13.38	13.23
	6	13.80	13.72	13.69	13.35	13.31	13.21	13.42	13.14
	11	13.60	13.70	13.37	13.07	13.34	13.82	13.05	13.29
802.11n HT20	Channel	6.5	13	19.5	26	39	52	58.5	65
	1	13.61	13.53	13.21	13.06	13.59	13.21	13.14	13.09
	6	13.91	13.52	13.32	13.03	13.25	13.32	13.21	13.68
	11	13.49	13.31	13.28	13.58	13.35	13.02	13.38	13.77

Table 23:Test results conducted power measurement WiFi 2.4G.

Note:

1. The Average conducted power of WiFi is measured with RMS detector and peak power is measured with PK detector.
2. Per KDB248227, for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate.

### 7.1.9 Conducted power measurements WiFi 5G

Mode	Channel	Frequency	Average Power (dBm)							
		(MHz)	Data Rate (bps)							
			6M	9M	12M	18M	24M	36M	48M	54M
802.11a	CH 36	5180	<b>14.30</b>	14.15	14.20	14.10	14.09	14.18	14.13	14.11
	CH 40	5200	14.18	14.16	14.08	14.10	14.17	14.07	14.05	13.98
	CH 44	5220	14.08	14.08	13.99	13.98	13.8	13.78	13.76	13.69
	CH 48	5240	13.76	13.69	13.72	13.75	13.78	13.69	13.59	13.58
	CH 52	5260	13.78	13.68	13.79	13.65	13.68	13.58	13.57	13.58
	CH 56	5280	13.82	13.98	13.88	13.77	13.76	13.66	13.55	13.68
	CH 60	5300	<b>14.20</b>	14.15	13.97	13.98	13.88	13.85	13.76	13.69
	CH 64	5320	14.18	14.17	13.95	14.04	13.85	13.77	13.65	13.57
	CH 100	5500	14.02	14.05	13.90	13.88	13.85	13.86	13.63	13.58
	CH 104	5520	13.88	13.95	13.84	13.68	13.78	13.67	13.72	13.67
	CH 108	5540	<b>14.10</b>	14.05	13.96	13.88	13.78	13.94	13.68	13.67
	CH 112	5560	13.78	13.68	13.75	13.69	13.68	13.5	13.55	13.55
	CH 116	5580	13.88	13.97	13.82	13.70	13.78	13.66	13.57	13.65
	CH 132	5660	13.95	13.96	13.86	13.92	13.76	13.88	13.73	13.57
	CH 136	5680	13.68	13.82	13.90	13.85	13.8	13.85	13.68	13.57
	CH 140	5700	13.85	13.93	13.86	13.67	13.73	13.66	13.77	13.66
	CH 149	5745	<b>14.25</b>	14.16	14.08	13.87	13.75	13.96	13.67	13.68
	CH 153	5765	13.86	13.73	13.82	13.67	13.65	13.58	13.59	13.55
	CH 157	5785	13.87	14.15	13.86	13.76	13.78	13.67	13.57	13.64
	CH 161	5805	14.05	13.96	13.85	13.95	13.77	13.86	13.73	13.58
	CH 165	5825	13.65	13.87	14.08	13.87	13.88	13.85	13.64	13.52



Mode	Channel	Frequency	Average Power (dBm)							
		(MHz)	Data Rate (bps)							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n- HT20 (5G)	CH 36	5180	14.14	14.12	140.4	14.05	14.08	13.9	13.9	13.95
	CH 40	5200	14.13	14.11	14.12	14.05	14.07	14.07	13.97	13.94
	CH 44	5220	14.04	14.06	14.05	13.9	13.9	14.07	13.94	13.95
	CH 48	5240	13.73	13.64	13.67	13.78	13.65	13.58	13.5	13.55
	CH 52	5260	13.72	13.75	13.65	13.64	13.57	13.58	13.67	13.58
	CH 56	5280	13.83	13.83	13.94	13.86	13.75	13.86	13.62	13.63
	CH 60	5300	13.94	13.95	14.05	14.05	13.84	13.84	13.87	13.67
	CH 64	5320	14.13	14.04	14.05	14.16	13.96	13.95	13.85	13.68
	CH 100	5500	13.95	13.93	13.85	13.85	13.85	13.76	13.58	13.55
	CH 104	5520	13.66	13.84	13.68	13.75	13.64	13.57	13.55	13.57
	CH 108	5540	13.83	13.67	13.65	13.67	13.55	13.58	13.67	13.58
	CH 112	5560	13.85	13.8	13.95	13.84	13.76	13.82	13.65	13.66
	CH 116	5580	13.65	13.84	13.76	13.68	13.85	13.83	13.85	13.67
	CH 132	5660	13.95	13.92	13.86	13.83	13.87	13.76	13.58	13.58
	CH 136	5680	13.64	13.84	13.67	13.78	13.64	13.58	13.57	13.55
	CH 140	5700	13.83	13.68	13.65	13.65	13.56	13.58	13.64	13.58
	CH 149	5745	13.82	13.65	13.85	13.92	13.84	13.84	13.85	13.65
	CH 153	5765	13.64	13.74	13.94	13.67	13.95	13.95	13.85	13.64
	CH 157	5785	13.93	13.95	13.86	13.84	13.8	13.76	13.58	13.57
	CH 161	5805	13.66	13.85	13.65	13.75	13.67	13.54	13.55	13.57
	CH 165	5825	13.85	13.64	13.62	13.65	13.58	13.52	13.65	13.55

Table 24: Test results conducted power measurement WiFi 5G

Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) Per KDB248227, for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate. 5G Hz WiFi SAR was tested on 802.11a. As 802.11n output power is less than 0.25dB higher than 802.11a, thus the SAR can be excluded.

### 7.1.10 Conducted power measurements BT

The output power of BT antenna is as following:

BT 2450	Average Conducted Power (dBm)		
	0CH	39CH	78CH
DH5	4.05	<b>6.17</b>	5.49
2DH5	2.17	3.74	3.31
3DH5	2.14	3.76	3.31

Table 25:Test results conducted power measurement BT.

Note: The conducted power of BT is measured with RMS detector.

## 7.2 SAR measurement Result

- 1) Per KDB447498 D01v05r01,testing of other required channels within the operating mode of a frequency band is not required when the reported(Scaled) SAR for the middle channel or highest output power channels is  $\leq 0.8\text{W/kg}$ . When the maximum output power variation across the required test channels is  $> \frac{1}{2} \text{ dB}$ , instead of the middle channel, the highest output power channel must be used.
- 2) Per KDB865664 D01v01r01,for each frequency band,repeated SAR measurement is required only when the measured SAR is  $\geq 0.8\text{W/Kg}$ ; if the deviation among the repeated measurement is  $\leq 20\%$ ,and the measured SAR  $< 1.45\text{W/Kg}$ ,only one repeated measurement is required.
- 3).Per KDB648474 D04v01r01,SAR is evaluated without a headset connected to the device.When the standalone reported SAR is  $\leq 1.2 \text{ W/kg}$ , no additional SAR evaluations using a headset are required.
- 4) Per KDB248227, for each frequency band of WiFi, SAR test at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate.
- 5) All measurement SAR result is scaled-up to account for tune-up tolerance is compliant

### 7.2.1 SAR measurement Result of GSM850

Test Position of Body with 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Liquid Temp.
			1-g	10-g					
Rear Side	251/848.8	GPRS 2TS	1.210	0.664	0.080	31.50	32.00	1.358	21.4°C
Rear Side	190/836.6	GPRS 2TS	1.270	0.692	0.090	31.72	32.00	1.355	21.4°C
Rear Side	128/824.2	GPRS 2TS	1.320	0.722	-0.050	31.65	32.00	<b>1.431</b>	21.4°C
Rear Side-repeated*	128/824.2	GPRS 2TS	1.260	0.683	0.150	31.65	32.00	1.366	21.4°C
Right Side	190/836.6	GPRS 2TS	0.229	0.144	0.190	31.72	32.00	0.244	21.4°C
Top Side	190/836.6	GPRS 2TS	0.510	0.234	0.170	31.72	32.00	0.544	21.4°C

Table 26:Test results Body SAR GSM850

Note:

- 1) \* - repeated at the highest SAR measurement according to the FCC KDB 865664



### 7.2.2 SAR measurement Result of GSM1900

Test Position of Body with 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Liquid Temp.
			1-g	10-g					
Rear Side	810/1909.8	GPRS 2TS	1.160	0.509	0.010	28.50	29.00	1.302	21.4°C
Rear Side	661/1880	GPRS 2TS	1.130	0.501	0.090	28.43	29.00	1.288	21.4°C
Rear Side	512/1850.2	GPRS 2TS	1.080	0.478	-0.010	28.50	29.00	1.212	21.4°C
Right Side	661/1880	GPRS 2TS	0.009	0.004	-0.170	28.43	29.00	0.010	21.4°C
Top Side	810/1909.8	GPRS 2TS	1.290	0.569	0.050	28.50	29.00	1.447	21.4°C
Top Side-repeated*	810/1909.8	GPRS 2TS	1.300	0.577	0.120	28.50	29.00	1.459	21.4°C
Top Side	661/1880	GPRS 2TS	1.250	0.551	0.080	28.43	29.00	1.425	21.4°C
Top Side	512/1850.2	GPRS 2TS	1.190	0.530	0.010	28.50	29.00	1.335	21.4°C

Table 27: Test results Body SAR GSM1900

Note:

1) \* - repeated at the highest SAR measurement according to the FCC KDB 865664

### 7.2.3 SAR measurement Result of UMTS Band V

Test Position of Body with 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Liquid Temp.
			1-g	10-g					
Rear Side	4233/846.6	RMC	0.855	0.467	0.100	23.04	23.50	0.951	21.4°C
Rear Side	4182/836.4	RMC	0.922	0.503	0.180	22.95	23.50	1.046	21.4°C
Rear Side-repeated*	4182/836.4	RMC	0.944	0.516	0.010	22.95	23.50	1.071	21.4°C
Rear Side	4132/826.4	RMC	0.834	0.455	0.180	23.02	23.50	0.931	21.4°C
Right Side	4182/836.4	RMC	0.151	0.094	0.050	22.95	23.50	0.171	21.4°C
Top Side	4182/836.4	RMC	0.368	0.165	0.000	22.95	23.50	0.418	21.4°C

Table 28:Test results Body SAR UMTS Band V

Note:

- 1) Per KDB941225 D01, when maximum output of each RF channel with HSDPA/HSUPA active is  $\leq \frac{1}{4}$  dB higher than without HSDPA/HSUPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is  $\leq 75\%$  of SAR limit, SAR evaluation for HSDPA/HSUPA is not required.
- 2) Per KDB941225 D02, When the maximum average output power of each RF channel with (uplink) HSPA+ or DC-HSDPA active is  $\leq \frac{1}{4}$  dB higher than that measured without HSPA+ or DC-HSDPA using 12.2 kbps RMC, or the maximum *reported* SAR for 12.2 kbps RMC without HSPA+ or DC-HSDPA is  $\leq 75\%$  of the SAR limit, SAR evaluation for HSPA+ or DC-HSDPA is not required.
- 3) \* - repeated at the highest SAR measurement according to the FCC KDB 865664

#### 7.2.4 SAR measurement Result of UMTS Band II

Test Position of Body with 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conduct ed Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Liquid Temp.
			1-g	10-g					
Rear Side	9538/1907.6	RMC	0.957	0.420	-0.070	22.95	23.50	1.086	21.4°C
Rear Side	9400/1880	RMC	0.794	0.351	-0.100	22.64	23.50	0.968	21.4°C
Rear Side	9262/1852.4	RMC	0.565	0.251	-0.090	22.78	23.50	0.667	21.4°C
Right Side	9400/1880	RMC	0.008	0.004	-0.010	22.64	23.50	0.010	21.4°C
Top Side	9538/1907.6	RMC	1.090	0.479	0.000	22.95	23.50	<b>1.237</b>	21.4°C
Top Side-repeated*	9538/1907.6	RMC	1.080	0.478	0.120	22.95	23.50	1.226	21.4°C
Top Side	9400/1880	RMC	0.964	0.427	0.140	22.64	23.50	1.175	21.4°C
Top Side	9262/1852.4	RMC	0.637	0.282	0.140	22.78	23.50	0.752	21.4°C

Table 29:Test results Body SAR UMTS Band II

Note:

- 1) Per KDB941225 D01, when maximum output of each RF channel with HSDPA/HSUPA active is  $\leq \frac{1}{4}$  dB higher than without HSDPA/HSUPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is  $\leq 75\%$  of SAR limit, SAR evaluation for HSDPA/HSUPA is not required.
- 2) Per KDB941225 D02, When the maximum average output power of each RF channel with (uplink) HSPA+ or DC-HSDPA active is  $\leq \frac{1}{4}$  dB higher than that measured without HSPA+ or DC-HSDPA using 12.2 kbps RMC, or the maximum *reported* SAR for 12.2 kbps RMC without HSPA+ or DC-HSDPA is  $\leq 75\%$  of the SAR limit, SAR evaluation for HSPA+ or DC-HSDPA is not required.
- 3) \* - repeated at the highest SAR measurement according to the FCC KDB 865664

### 7.2.5 SAR measurement Result of LTE Band II

Test Position of Body with0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conduct ed Power (dBm)	Tune-up Powe r (dBm)	Reporte d 1-g SAR (W/kg)	Liquid Temp.
			1-g	10-g					
1RB									
Rear Side	19100/1900	20M QPSK 1RB#99	1.100	0.490	0.160	22.54	23.00	1.223	21.4°C
Rear Side	18900/1880	20M QPSK 1RB#50	0.820	0.365	0.060	22.63	23.00	0.893	21.4°C
Rear Side	18700/1860	20M QPSK 1RB#99	1.170	0.520	0.130	22.38	23.00	1.350	21.4°C
Right Side	18900/1880	20M QPSK 1RB#50	0.005	0.001	0.170	22.63	23.00	0.005	21.4°C
Top Side	19100/1900	20M QPSK 1RB#99	1.290	0.571	0.160	22.54	23.00	1.434	21.4°C
Top Side-repeated*	19100/1900	20M QPSK 1RB#99	1.300	0.576	0.000	22.54	23.00	1.445	21.4°C
Top Side	18900/1880	20M QPSK 1RB#50	1.010	0.449	0.140	22.63	23.00	1.100	21.4°C
Top Side	18700/1860	20M QPSK 1RB#99	1.250	0.555	0.100	22.38	23.00	1.442	21.4°C
50%RB									
Rear Side	19100/1900	20M QPSK 50%RB#50	0.957	0.423	-0.060	22.13	23.00	1.169	21.4°C
Rear Side	18900/1880	20M QPSK 50%RB#25	0.834	0.371	-0.100	22.49	23.00	0.938	21.4°C
Rear Side	18700/1860	20M QPSK 50%RB#25	0.736	0.327	-0.090	21.89	23.00	0.950	21.4°C
Right Side	18900/1880	20M QPSK 50%RB#25	0.004	0.001	0.140	22.49	23.00	0.005	21.4°C
Top Side	19100/1900	20M QPSK 50%RB#50	1.050	0.462	-0.060	22.13	23.00	1.283	21.4°C
Top Side	18900/1880	20M QPSK 50%RB#25	1.020	0.453	0.140	22.49	23.00	1.147	21.4°C
Top Side	18700/1860	20M QPSK 50%RB#25	0.794	0.351	0.090	21.89	23.00	1.025	21.4°C
100%RB									
Rear Side	18900/1880	20M QPSK 100%RB#0	0.849	0.376	0.190	22.32	23.00	0.993	21.4°C
Top Side	18900/1880	20M QPSK 100%RB#0	1.010	0.446	-0.120	22.32	23.00	1.181	21.4°C

Table 30: Test results Body SAR LTE Band II

Note:

1) \* - repeated at the highest SAR measurement according to the FCC KDB 865664

## 7.2.6 SAR measurement Result of LTE Band V

Test Position of Body with 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune- up Power (dBm)	Reported 1-g SAR (W/kg)	Liquid Temp.
			1-g	10-g					
1RB									
Rear Side	20600/836.7	10M QPSK 1RB#25	0.976	0.528	-0.010	23.69	24.00	1.048	21.4°C
Rear Side	20525/836.5	10M QPSK 1RB#25	1.140	0.626	0.100	23.55	24.00	1.264	21.4°C
Rear Side- repeated*	20525/836.5	10M QPSK 1RB#25	1.100	0.597	0.070	23.55	24.00	1.220	21.4°C
Rear Side	2450/829	10M QPSK 1RB#25	1.010	0.552	0.000	23.59	24.00	1.110	21.4°C
Right Side	20600/836.7	10M QPSK 1RB#25	0.169	0.107	0.140	23.69	24.00	0.182	21.4°C
Top Side	20600/836.7	10M QPSK 1RB#25	0.390	0.182	0.190	23.69	24.00	0.419	21.4°C
50%RB									
Rear Side	20600/836.7	10M QPSK 50%RB#13	0.931	0.504	0.150	22.48	23.00	1.049	21.4°C
Rear Side	20525/836.5	10M QPSK 50%RB#13	1.080	0.584	-0.010	22.56	23.00	1.195	21.4°C
Rear Side	2450/829	10M QPSK 50%RB#13	0.977	0.532	-0.040	22.58	23.00	1.076	21.4°C
Right Side	2450/829	10M QPSK 50%RB#13	0.159	0.101	0.150	22.58	23.00	0.175	21.4°C
Top Side	2450/829	10M QPSK 50%RB#13	0.390	0.174	0.140	22.58	23.00	0.430	21.4°C
100%RB									
Rear Side	2450/829	20M QPSK 100%RB#0	0.942	0.513	0.020	22.34	23.00	1.097	21.4°C

Table 31:Test results Body SAR LTE Band V

Note:

1) \* - repeated at the highest SAR measurement according to the FCC KDB 865664

### 7.2.7 SAR measurement Result of LTE Band VII

Test Position of Body with0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conduc ted Power (dBm)	Tune- up Power (dBm)	Reporte d 1-g SAR (W/kg)	Liquid Temp.
			1-g	10-g					
1RB									
Rear Side	21350/2560	20M QPSK 1RB#50	1.080	0.386	0.170	22.99	24.00	1.363	21.4°C
Rear Side	21100/2535	20M QPSK 1RB#50	1.020	0.371	0.010	22.95	24.00	1.299	21.4°C
Rear Side	20850/2510	20M QPSK 1RB#50	0.840	0.311	-0.040	22.64	24.00	1.149	21.4°C
Right Side	21350/2560	20M QPSK 1RB#50	0.019	0.010	0.140	22.99	24.00	0.024	21.4°C
Top Side	21350/2560	20M QPSK 1RB#50	1.060	0.400	-0.070	22.99	24.00	1.338	21.4°C
Top Side	21100/2535	20M QPSK 1RB#50	1.050	0.412	-0.010	22.95	24.00	1.337	21.4°C
Top Side	20850/2510	20M QPSK 1RB#50	0.921	0.378	-0.150	22.64	24.00	1.260	21.4°C
50%RB									
Rear Side	21350/2560	20M QPSK 50%RB#25	1.050	0.373	0.040	22.08	23.00	1.298	21.4°C
Rear Side	21100/2535	20M QPSK 50%RB#25	0.959	0.347	0.010	21.87	23.00	1.244	21.4°C
Rear Side	20850/2510	20M QPSK 50%RB#0	0.839	0.310	-0.120	21.62	23.00	1.153	21.4°C
Right Side	21350/2560	20M QPSK 50%RB#25	0.017	0.009	0.140	22.08	23.00	0.021	21.4°C
Top Side	21350/2560	20M QPSK 50%RB#25	1.030	0.381	-0.090	22.08	23.00	1.273	21.4°C
Top Side	21100/2535	20M QPSK 50%RB#25	0.982	0.379	0.120	21.87	23.00	1.274	21.4°C
Top Side	20850/2510	20M QPSK 50%RB#0	0.918	0.376	0.100	21.62	23.00	1.261	21.4°C
100%RB									
Rear Side	21350/2560	20M QPSK 100%RB#0	1.130	0.394	-0.090	21.93	23.00	1.446	21.4°C
Rear Side- repeated*	21350/2560	20M QPSK 100%RB#0	1.130	0.395	0.050	21.93	23.00	1.446	21.4°C
Top Side	21350/2560	20M QPSK 100%RB#0	1.010	0.374	0.170	21.93	23.00	1.292	21.4°C

Table 32: Test results Body SAR LTE Band VII

Note:

1) \* - repeated at the highest SAR measurement according to the FCC KDB 865664

## 7.2.8 SAR measurement Result of WiFi 2.4G

Test Position of Body with 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Liquid Temp.
			1-g	10-g					
Rear Side	11/2462	802.11 b	1.220	0.461	-0.120	14.48	15.00	<b>1.375</b>	21.4°C
Rear Side	6/2437	802.11 b	0.982	0.374	-0.110	14.83	15.00	1.021	21.4°C
Rear Side	1/2412	802.11 b	1.260	0.481	-0.020	14.80	15.00	1.319	21.4°C
Rear Side-repeated*	1/2412	802.11 b	1.190	0.460	0.020	14.80	15.00	1.246	21.4°C
Left Side	6/2437	802.11 b	0.158	0.070	0.120	14.83	15.00	0.164	21.4°C
Top Side	6/2437	802.11 b	0.306	0.129	0.050	14.83	15.00	0.318	21.4°C

Table 33: Test results Body SAR WiFi 2450MHz

1) \* - repeated at the highest SAR measurement according to the FCC KDB 865664

## 7.2.9 SAR measurement Result of WiFi 5G

Test Position of Body with 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Liquid Temp.
			1-g	10-g					
Test data of 5.2GHz band									
Rear Side	36/5180	802.11 a	0.752	0.204	-0.140	14.30	14.50	0.787	21.4°C
Left Side	36/5180	802.11 a	0.149	0.045	0.170	14.30	14.50	0.156	21.4°C
Top Side	36/5180	802.11 a	0.341	0.108	-0.060	14.30	14.50	0.357	21.4°C
Test data of 5.3GHz band									
Rear Side	60/5300	802.11 a	0.745	0.199	0.190	14.20	14.50	<b>0.798</b>	21.4°C
Left Side	60/5300	802.11 a	0.153	0.045	0.120	14.20	14.50	0.164	21.4°C
Top Side	60/5300	802.11 a	0.479	0.138	-0.040	14.20	14.50	0.513	21.4°C
Test data of 5.5GHz band									
Rear Side	108/5540	802.11 a	0.554	0.140	0.050	14.10	14.50	0.607	21.4°C
Left Side	108/5540	802.11 a	0.096	0.026	0.100	14.10	14.50	0.105	21.4°C
Top Side	108/5540	802.11 a	0.678	0.176	-0.050	14.10	14.50	0.743	21.4°C
Test data of 5.8GHz band									
Rear Side	149/5745	802.11 a	0.471	0.111	-0.030	14.25	14.50	0.499	21.4°C
Left Side	149/5745	802.11 a	0.052	0.015	0.170	14.25	14.50	0.055	21.4°C
Top Side	149/5745	802.11 a	0.751	0.188	-0.120	14.25	14.50	0.795	21.4°C

Table 34: Test results Body SAR WiFi 5G



### 7.2.10 SAR measurement Result BT


Test Position of Body with 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune- up Power (dBm)	Reported 1-g SAR (W/kg)	Liquid Temp.
			1-g	10-g					
Rear Side	39/2441	GFSK	0.050	0.018	0.000	6.17	7.00	<b>0.061</b>	21.4°C
Left Side	39/2441	GFSK	0.008	0.003	0.000	6.17	7.00	0.010	21.4°C
Top Side	39/2441	GFSK	0.010	0.003	0.150	6.17	7.00	0.012	21.4°C

Table 35: Test results Body SAR BT

### 7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v05r01.

The location of the antennas inside mobile phone is shown as below picture:

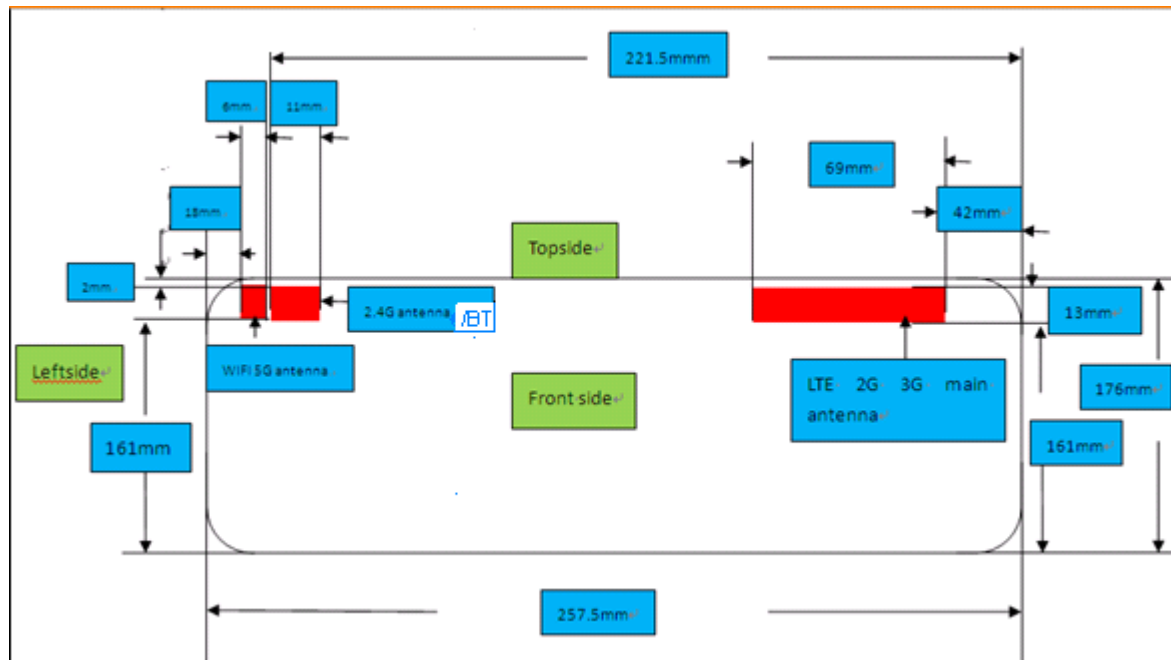

The SAR measurement positions of each band are as below:

Mode	Front Side	Rear Side	Left Side	Right Side	Top Side	Bottom Side
2G/3G Antenna	No	Yes	NO	Yes	Yes	NO
WiFi 2.4G/BT	No	Yes	Yes	NO	Yes	NO
WiFi 5G	No	Yes	Yes	NO	Yes	NO

Table 36: SAR measurement positions

Note: Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Exclusion Threshold in KDB 447498D01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

### 7.3.1 Stand-alone SAR test exclusion

The 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR, where:

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

a) Body position

Mode	$P_{\text{max}}$ (dBm)*	$P_{\text{max}}$ (mW)	Distance (mm)	f (GHz)	Calculation Result	Exclusion threshold	SAR test exclusion
GSM850	33.50	2238.72	5	0.850	412.80	3.00	No
GSM1900	30.50	1122.02	5	1.900	309.32	3.00	No
UMTS Band V	23.50	223.87	5	0.850	41.28	3.00	No
UMTS Band II	23.50	223.87	5	1.900	61.72	3.00	No
LTE Band II	23.00	199.53	5	1.900	55.01	3.00	No
LTE Band V	24.00	251.19	5	0.850	46.32	3.00	No
LTE Band VII	24.00	251.19	5	2.600	81.01	3.00	No
WiFi 2.4G	15.00	31.62	5	2.450	9.90	3.00	No
BT	7.00	5.01	5	2.450	1.57	3.00	Yes
WiFi 5G	14.50	28.18	5	5.200	12.85	3.00	No
WiFi 5G	14.50	28.18	5	5.300	12.98	3.00	No
WiFi 5G	14.50	28.18	5	5.500	13.22	3.00	No
WiFi 5G	14.50	28.18	5	5.800	13.58	3.00	No

Table 37: Standalone SAR test exclusion in body position

Note: \* - maximum possible output power declared by manufacturer

As the estimated SAR of BT is overly conservative , the standalone SAR measurement of BT is performed and the reported SAR is used to determine simultaneous transmission SAR test exclusion instead of the estimated SAR.

### 7.3.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities are as below:

Simultaneous Tx Combination	Configuration	Body
1	GSM850/1900 + 2.4G WiFi	Yes
2	UMTS Band II/V+ 2.4G WiFi	Yes
3	LTE Band II/V/VII+ 2.4G WiFi	Yes
4	GSM850/1900+ 5G WiFi	Yes
5	UMTS Band II/V+ 5G WiFi	Yes
6	LTE Band II/V/VII+ 5G WiFi	Yes
7	GSM850/1900 + BT	Yes
8	UMTS Band II/V+ BT	Yes
9	LTE Band II/V/VII+ BT	Yes

Table 38: Simultaneous Transmission Possibilities

Note:

- 1) The device does not support simultaneous BT and 2.4G WiFi, because they share the same antenna.
- 2) The device does not support simultaneous BT and WiFi 5G, because they use the technique of Time Division and cannot transmit simultaneously.

### 7.3.3 SAR Summation Scenario

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		GSM850	2.4G WiFi			
Body	Rear Side	1.431	1.375	See Note	0.027	N/A
	Left Side	0.000	0.164	0.164	N/A	N/A
	Right Side	0.244	0.000	0.244	N/A	N/A
	Top Side	0.544	0.318	0.862	N/A	N/A

Table 39: Simultaneous Tx Combination of GSM850 and 2.4G WiFi

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		GSM1900	2.4G WiFi			
Body	Rear Side	1.302	1.375	See Note	0.029	N/A
	Left Side	0.000	0.164	0.164	N/A	N/A
	Right Side	0.010	0.000	0.010	N/A	N/A
	Top Side	1.459	0.318	See Note	0.015	N/A

Table 40: Simultaneous Tx Combination of GSM1900 and 2.4G WiFi

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		UMTS Band V	2.4G WiFi			
Body	Rear Side	1.071	1.375	See Note	0.023	N/A
	Left Side	0.000	0.164	0.164	N/A	N/A
	Right Side	0.171	0.000	0.171	N/A	N/A
	Top Side	0.418	0.318	0.736	N/A	N/A

Table 41: Simultaneous Tx Combination of UMTS Band V and 2.4G WiFi

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		UMTS Band II	2.4G WiFi			
Body	Rear Side	1.086	1.375	See Note	0.025	N/A
	Left Side	0.000	0.164	0.164	N/A	N/A
	Right Side	0.010	0.000	0.010	N/A	N/A
	Top Side	1.237	0.318	<b>1.555</b>	N/A	N/A

Table 42: Simultaneous Tx Combination of UMTS Band II and 2.4G WiFi

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		LTE Band II	2.4G WiFi			
Body	Rear Side	1.391	1.375	See Note	0.029	N/A
	Left Side	0.000	0.164	0.164	N/A	N/A
	Right Side	0.005	0.000	0.005	N/A	N/A
	Top Side	1.445	0.318	See Note	0.015	N/A

Table 43: Simultaneous Tx Combination of LTE Band II and 2.4G WiFi

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		LTE Band V	2.4G WiFi			
Body	Rear Side	1.264	1.375	See Note	0.026	N/A
	Left Side	0.000	0.164	0.164	N/A	N/A
	Right Side	0.182	0.000	0.182	N/A	N/A
	Top Side	0.430	0.318	0.748	N/A	N/A

Table 44: Simultaneous Tx Combination of LTE Band V and 2.4G WiFi

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		LTE Band VII	2.4G WiFi			
Body	Rear Side	1.446	1.375	See Note	0.027	N/A
	Left Side	0.000	0.164	0.164	N/A	N/A
	Right Side	0.024	0.000	0.024	N/A	N/A
	Top Side	1.338	0.318	See Note	0.012	N/A

Table 45: Simultaneous Tx Combination of LTE Band VII and 2.4G WiFi

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		GSM850	5G WiFi			
Body	Rear Side	1.431	0.798	See Note	0.019	N/A
	Left Side	0.000	0.164	0.164	N/A	N/A
	Right Side	0.244	0.000	0.244	N/A	N/A
	Top Side	0.544	0.795	1.339	N/A	N/A

Table 46: Simultaneous Tx Combination of GSM850 and 5G WiFi

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		GSM1900	5G WiFi			
Body	Rear Side	1.302	0.798	See Note	0.019	N/A
	Left Side	0.000	0.164	0.164	N/A	N/A
	Right Side	0.010	0.000	0.010	N/A	N/A
	Top Side	1.459	0.795	See Note	0.021	N/A

Table 47: Simultaneous Tx Combination of GSM1900 and 5G WiFi

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		UMTS Band V	5G WiFi			
Body	Rear Side	1.071	0.798	See Note	0.015	N/A
	Left Side	0.000	0.164	0.164	N/A	N/A
	Right Side	0.171	0.000	0.171	N/A	N/A
	Top Side	0.418	0.795	1.213	N/A	N/A

Table 48: Simultaneous Tx Combination of UMTS Band V and 5G WiFi

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		UMTS Band II	5G WiFi			
Body	Rear Side	1.086	0.798	See Note	0.016	N/A
	Left Side	0.000	0.164	0.164	N/A	N/A
	Right Side	0.010	0.000	0.010	N/A	N/A
	Top Side	1.237	0.795	See Note	0.018	N/A

Table 49: Simultaneous Tx Combination of UMTS Band II and 5G WiFi

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		LTE Band II	5G WiFi			
Body	Rear Side	1.391	0.798	See Note	0.02	N/A
	Left Side	0.000	0.164	0.164	N/A	N/A
	Right Side	0.005	0.000	0.005	N/A	N/A
	Top Side	1.445	0.795	See Note	0.021	N/A

Table 50: Simultaneous Tx Combination of LTE Band II and 5G WiFi

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		LTE Band V	5G WiFi			
Body	Rear Side	1.264	0.798	See Note	0.017	N/A
	Left Side	0.000	0.164	0.164	N/A	N/A
	Right Side	0.182	0.000	0.182	N/A	N/A
	Top Side	0.430	0.795	1.225	N/A	N/A

Table 51: Simultaneous Tx Combination of LTE Band V and 5G WiFi

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		LTE Band VII	5G WiFi			
Body	Rear Side	1.446	0.798	See Note	0.019	N/A
	Left Side	0.000	0.164	0.164	N/A	N/A
	Right Side	0.024	0.000	0.024	N/A	N/A
	Top Side	1.338	0.795	See Note	0.018	N/A

Table 52: Simultaneous Tx Combination of LTE Band VII and 5G WiFi

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		GSM850	BT			
Body	Rear Side	1.431	0.061	<b>1.492</b>	N/A	N/A
	Left Side	0.000	0.012	0.012	N/A	N/A
	Right Side	0.244	0.000	0.244	N/A	N/A
	Top Side	0.544	0.010	0.554	N/A	N/A

Table 53: Simultaneous Tx Combination of GSM850 and BT

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		GSM1900	BT			
Body	Rear Side	1.302	0.061	1.363	N/A	N/A
	Left Side	0.000	0.012	0.012	N/A	N/A
	Right Side	0.010	0.000	0.010	N/A	N/A
	Top Side	1.459	0.010	<b>1.469</b>	N/A	N/A

Table 54: Simultaneous Tx Combination of GSM1900 and BT

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		UMTS Band V	BT			
Body	Rear Side	1.071	0.061	<b>1.132</b>	N/A	N/A
	Left Side	0.000	0.012	0.012	N/A	N/A
	Right Side	0.171	0.000	0.171	N/A	N/A
	Top Side	0.418	0.010	0.428	N/A	N/A

Table 55: Simultaneous Tx Combination of UMTS Band V and BT

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		UMTS Band II	BT			
Body	Rear Side	1.086	0.061	1.147	N/A	N/A
	Left Side	0.000	0.012	0.012	N/A	N/A
	Right Side	0.010	0.000	0.010	N/A	N/A
	Top Side	1.237	0.010	<b>1.247</b>	N/A	N/A

Table 56: Simultaneous Tx Combination of UMTS Band II and BT

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		LTE Band II	BT			
Body	Rear Side	1.391	0.061	1.452	N/A	N/A
	Left Side	0.000	0.012	0.012	N/A	N/A
	Right Side	0.005	0.000	0.005	N/A	N/A
	Top Side	1.445	0.010	<b>1.455</b>	N/A	N/A

Table 57: Simultaneous Tx Combination of LTE Band II and BT

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		LTE Band V	BT			
Body	Rear Side	1.264	0.061	<b>1.325</b>	N/A	N/A
	Left Side	0.000	0.012	0.012	N/A	N/A
	Right Side	0.182	0.000	0.182	N/A	N/A
	Top Side	0.430	0.010	0.440	N/A	N/A

Table 58: Simultaneous Tx Combination of LTE Band V and BT

Test Position		Scaled SAR <sub>Max</sub>		$\Sigma$ 1-g SAR	SPLSR	Remark
		LTE Band VII	BT			
Body	Rear Side	1.446	0.061	<b>1.507</b>	N/A	N/A
	Left Side	0.000	0.012	0.012	N/A	N/A
	Right Side	0.024	0.000	0.024	N/A	N/A
	Top Side	1.338	0.010	1.348	N/A	N/A

Table 59: Simultaneous Tx Combination of LTE Band VII and BT

Note:

- 1) No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SAR to peak location separation ratio(SPLSR) between the antenna pairs was below 0.04 per FCC KDB447498 D01v05r01. See Section 7.3.4 for detailed SPLSR analysis.
- 2) When SAR to peak location separation ratio is applied to determine simultaneous transmission SAR test exclusion, the highest of the reported stand-alone SAR and estimated SAR is used per KDB690783D01.



### 7.3.4 SPLSR Evaluation Analysis

According to KDB447498 D01v05, When the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio(SPLSR).When the SAR to peak location ratio for each pair of antennas is  $\leq 0.04$ , simultaneous SAR evaluation is not required.

When SAR is measured for both antennas in the pair, the peak location separation distance is computed by the following fomula:


$$\text{Distance}_{\text{Tx1-Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

$$\text{SPLS Ratio} = (\text{SAR}_1 + \text{SAR}_2)^{1.5}/R_i$$

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

- 1) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with GSM850 and 2.4G WiFi.

The Peak SAR location plot is as below:

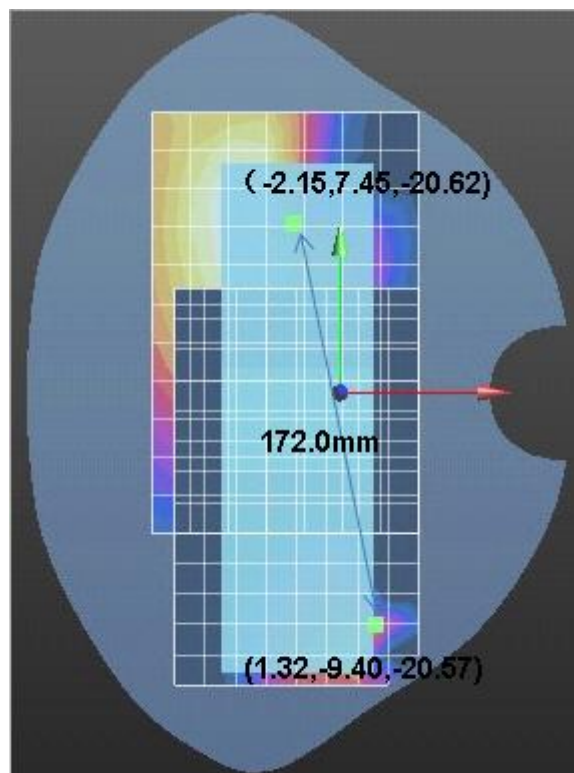


The SAR to peak location ratio calculation is as below:

Test Position	GSM850 (W/kg)	WiFi 2.4G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Rear Side	1.431	1.375	172.0	0.027	0.04	Not required

- 2) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with GSM1900 and 2.4G WiFi.

The Peak SAR location plot is as below:

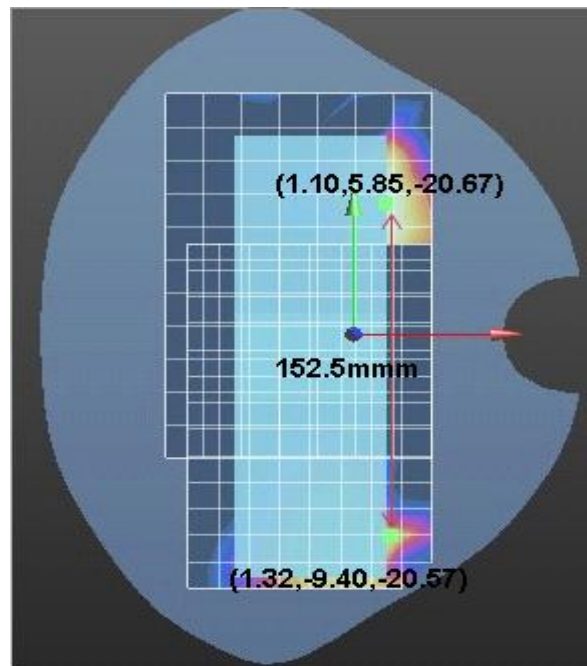


The SAR to peak location ratio calculation is as below:

Test Position	GSM1900 (W/kg)	WiFi 2.4G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Rear Side	1.302	1.375	152.5	0.029	0.04	Not required

- 3) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with GSM1900 and 2.4G WiFi.

The Peak SAR location plot is as below:

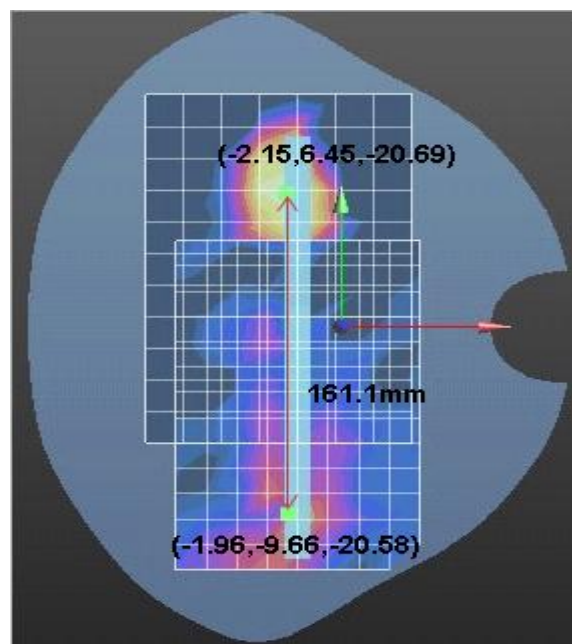


The SAR to peak location ratio calculation is as below:

Test Position	GSM1900 (W/kg)	WiFi 2.4G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Top Side	1.459	0.318	161.1	0.015	0.04	Not required

- 4) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with UMTS Band V and 2.4G WiFi.

The Peak SAR location plot is as below:

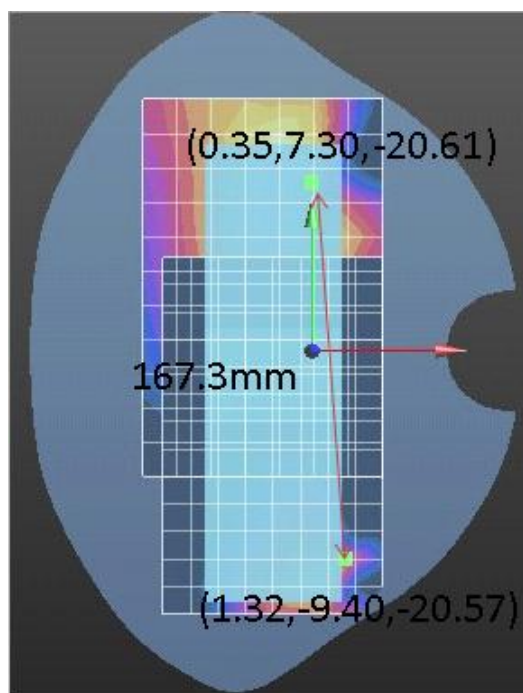


The SAR to peak location ratio calculation is as below:

Test Position	UMTS Band V (W/kg)	WiFi 2.4G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Rear Side	1.071	1.375	167.3	0.023	0.04	Not required

- 5) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with UMTS Band II and 2.4G WiFi.

The Peak SAR location plot is as below:

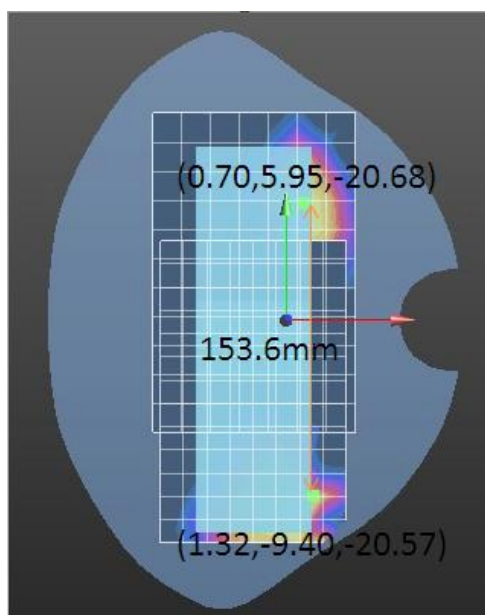


The SAR to peak location ratio calculation is as below:

Test Position	UMTS Band V (W/kg)	WiFi 2.4G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Rear Side	1.086	1.375	153.6	0.025	0.04	Not required

- 6) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with LTE Band II and 2.4G WiFi.

The Peak SAR location plot is as below:

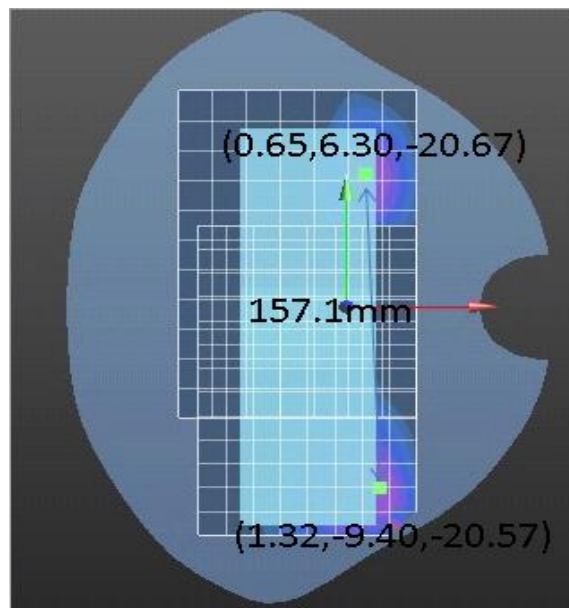


The SAR to peak location ratio calculation is as below:

Test Position	LTE Band II (W/kg)	WiFi 2.4G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Rear Side	1.391	1.375	157.1	0.029	0.04	Not required

- 7) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with LTE Band II and 2.4G WiFi.

The Peak SAR location plot is as below:

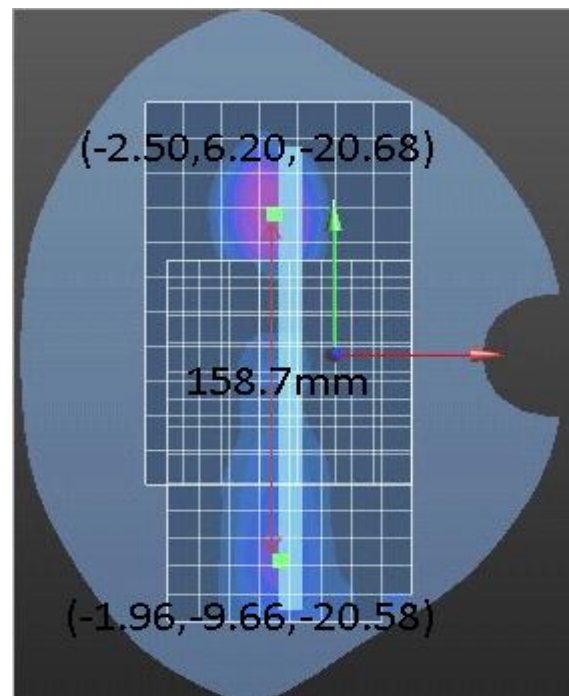


The SAR to peak location ratio calculation is as below:

Test Position	LTE Band II (W/kg)	WiFi 2.4G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Top Side	1.445	0.318	158.7	0.015	0.04	Not required

- 8) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with LTE Band V and 2.4G WiFi.

The Peak SAR location plot is as below:

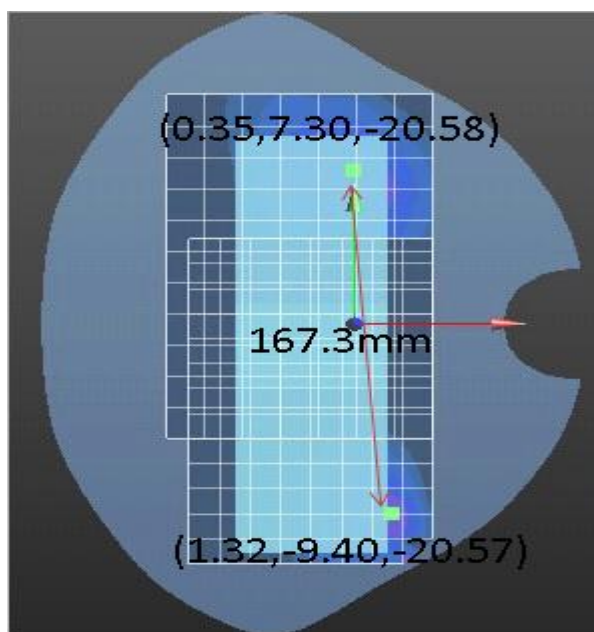


The SAR to peak location ratio calculation is as below:

Test Position	LTE Band V (W/kg)	WiFi 2.4G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Rear Side	1.264	1.375	167.3	0.026	0.04	Not required

- 9) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with LTE Band VII and 2.4G WiFi.

The Peak SAR location plot is as below:

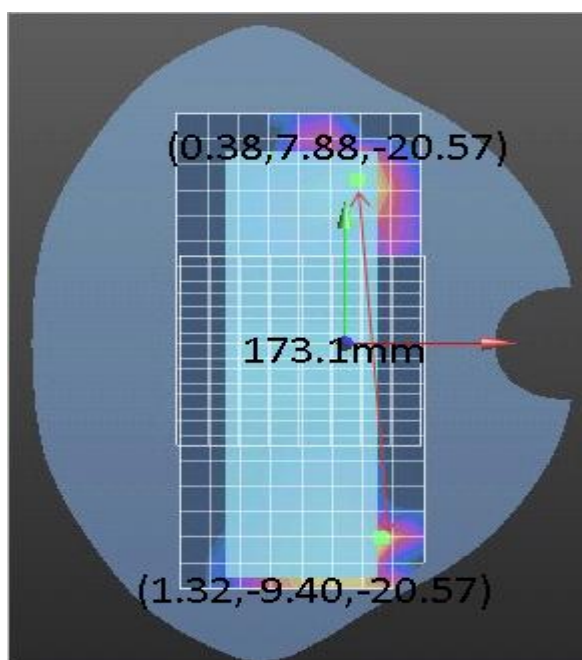


The SAR to peak location ratio calculation is as below:

Test Position	LTE Band VII (W/kg)	WiFi 2.4G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Rear Side	1.446	1.375	173.1	0.027	0.04	Not required



- 10) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with LTE Band VII and 2.4G WiFi.

The Peak SAR location plot is as below:

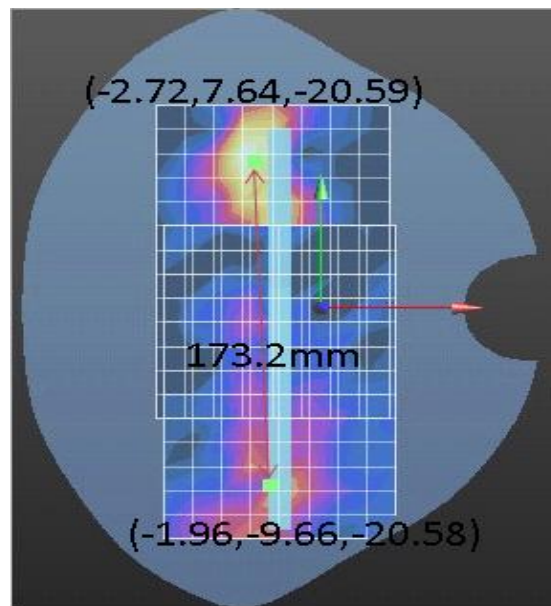


The SAR to peak location ratio calculation is as below:

Test Position	LTE Band VII (W/kg)	WiFi 2.4G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Top Side	1.338	0.318	173.2	0.012	0.04	Not required

- 11) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with GSM850 and 5G WiFi.

The Peak SAR location plot is as below:

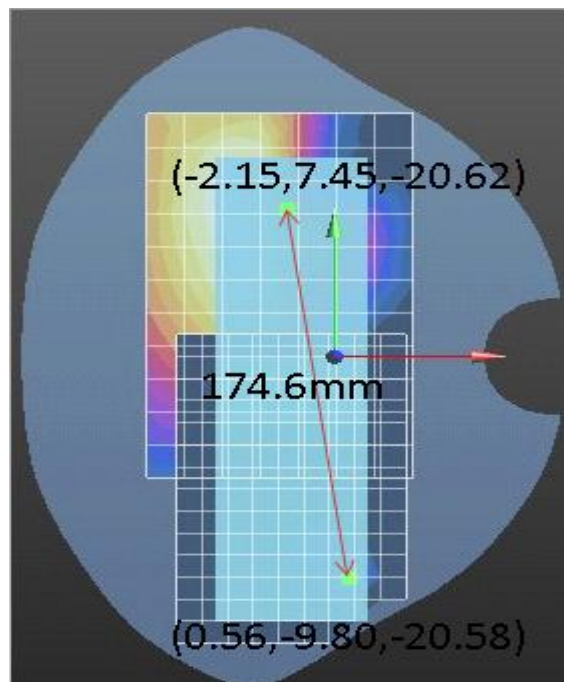


The SAR to peak location ratio calculation is as below:

Test Position	GSM850 (W/kg)	WiFi 5G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Rear Side	1.431	0.798	174.6	0.019	0.04	Not required

- 12) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with GSM1900 and 5G WiFi.

The Peak SAR location plot is as below:

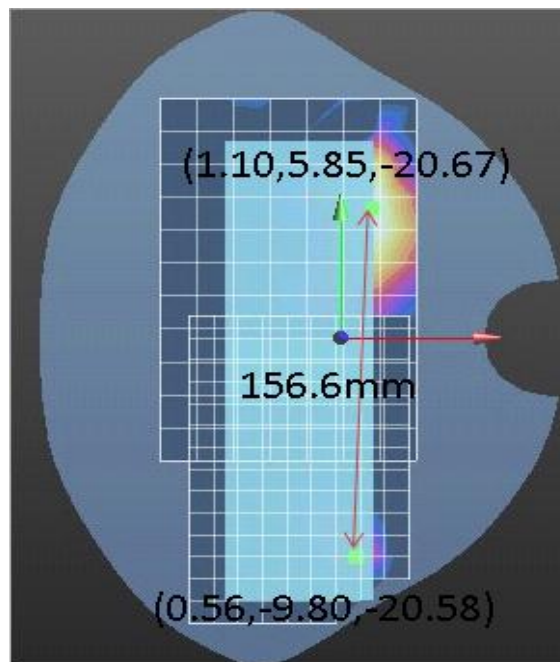


The SAR to peak location ratio calculation is as below:

Test Position	GSM1900 (W/kg)	WiFi 5G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Rear Side	1.302	0.798	156.6	0.019	0.04	Not required

- 13) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with GSM1900 and 5G WiFi.

The Peak SAR location plot is as below:

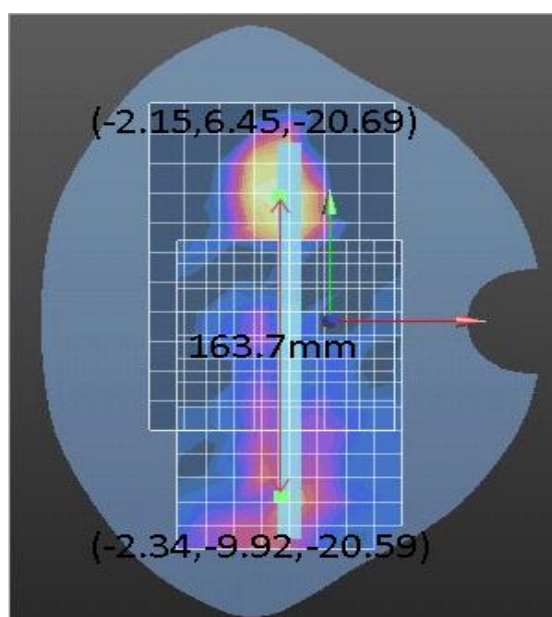


The SAR to peak location ratio calculation is as below:

Test Position	GSM1900 (W/kg)	WiFi 5G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Top Side	1.459	0.795	163.7	0.021	0.04	Not required

- 14) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with UMTS Band V and 5G WiFi.

The Peak SAR location plot is as below:

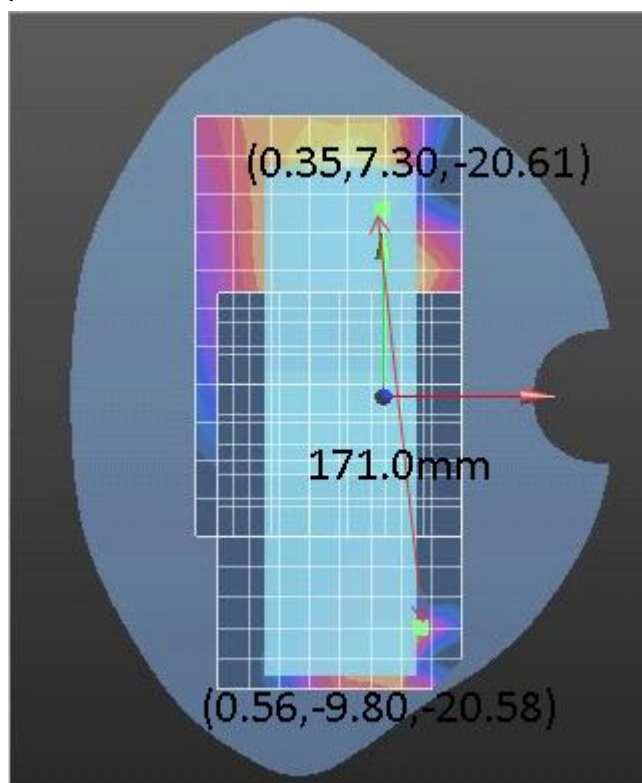


The SAR to peak location ratio calculation is as below:

Test Position	UMTS Band V (W/kg)	WiFi 5G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Rear Side	1.071	0.798	171.0	0.015	0.04	Not required

- 15) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with UMTS Band II and 5G WiFi.

The Peak SAR location plot is as below:

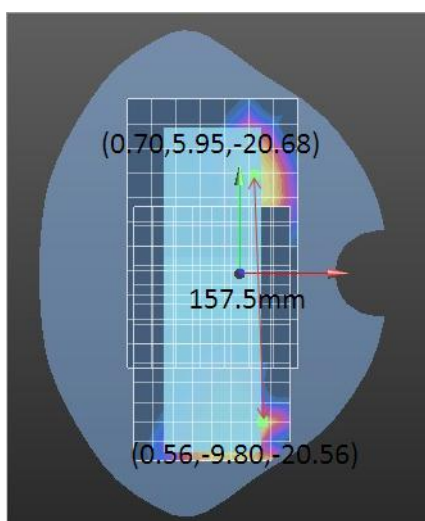


The SAR to peak location ratio calculation is as below:

Test Position	UMTS Band II (W/kg)	WiFi 5G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Rear Side	1.086	0.798	157.5	0.016	0.04	Not required



- 16) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with UMTS Band II and 5G WiFi.

The Peak SAR location plot is as below:

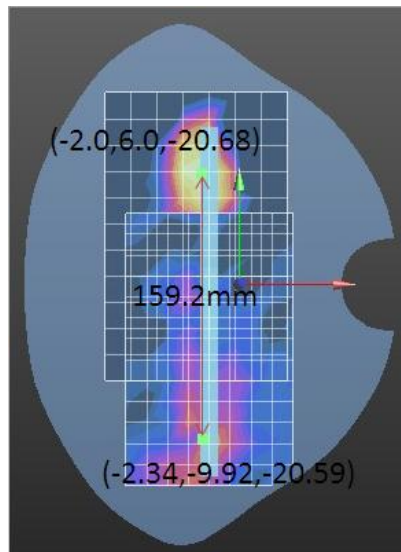


The SAR to peak location ratio calculation is as below:

Test Position	UMTS Band II (W/kg)	WiFi 5G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Top Side	1.237	0.795	159.2	0.018	0.04	Not required

- 17) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with LTE Band II and 5G WiFi.

The Peak SAR location plot is as below:

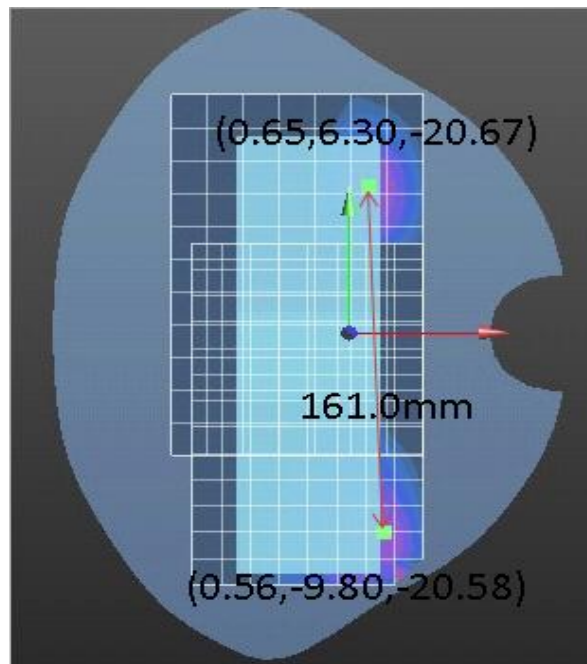


The SAR to peak location ratio calculation is as below:

Test Position	LTE Band II (W/kg)	WiFi 5G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Rear Side	1.391	0.798	161.0	0.020	0.04	Not required

- 18) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with LTE Band II and 5G WiFi.

The Peak SAR location plot is as below:

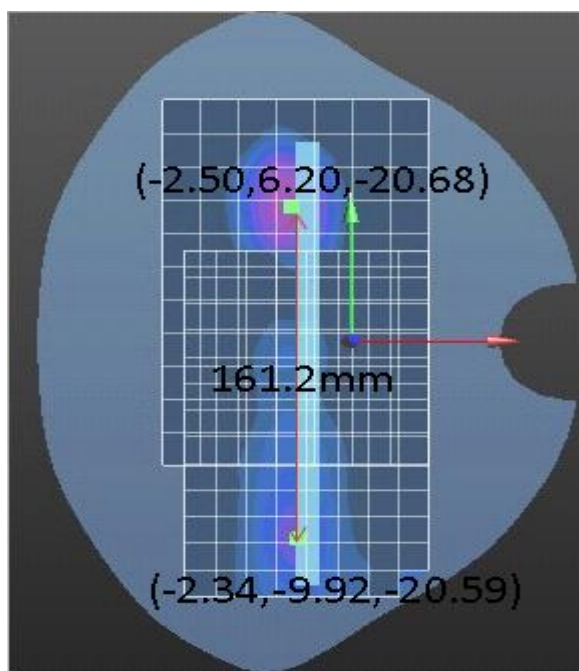


The SAR to peak location ratio calculation is as below:

Test Position	LTE Band II (W/kg)	WiFi 5G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Top Side	1.445	0.795	161.2	0.021	0.04	Not required

- 19) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with LTE Band V and 5G WiFi.

The Peak SAR location plot is as below:

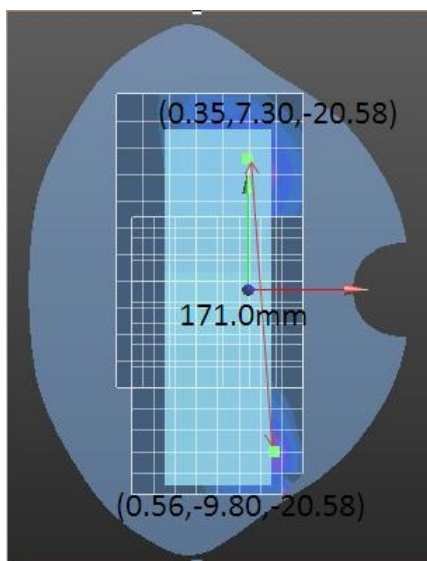


The SAR to peak location ratio calculation is as below:

Test Position	LTE Band V (W/kg)	WiFi 5G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Rear Side	1.264	0.798	171.0	0.017	0.04	Not required

20) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with LTE Band VII and 5G WiFi.

The Peak SAR location plot is as below:

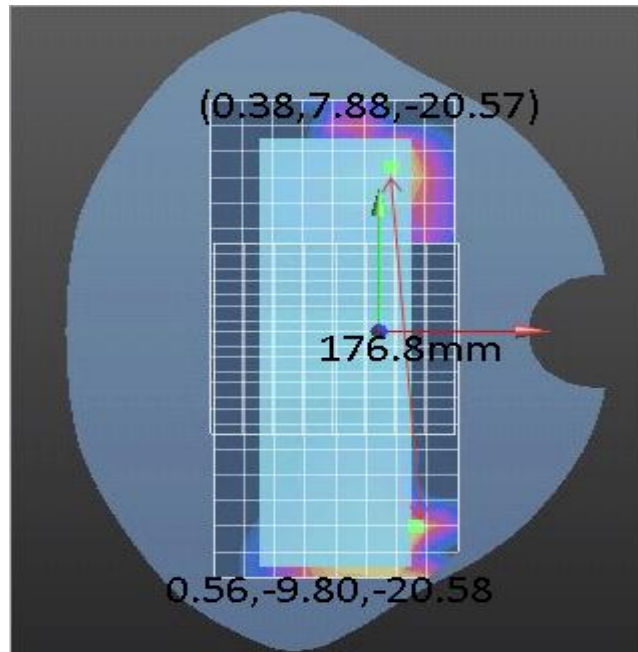


The SAR to peak location ratio calculation is as below:

Test Position	LTE Band VII (W/kg)	WiFi 5G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Rear Side	1.446	0.798	176.8	0.019	0.04	Not required

21) The sum of aggregate 1g SAR was above 1.6W/Kg for Rear side configuration with LTE Band VII and 5G WiFi.

The Peak SAR location plot is as below:

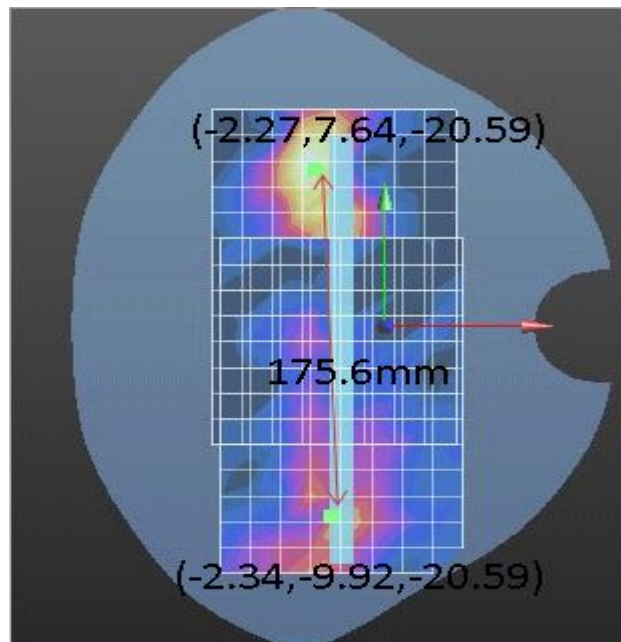

The SAR to peak location ratio calculation is as below:

Test Position	LTE Band VII (W/kg)	WiFi 5G (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Top Side	1.338	0.795	175.6	0.018	0.04	Not required

### **7.3.5 Simultaneous Transmission Conclusion**

The above numeral summed SAR results and SPLSR analysis is sufficient to determin that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01v05r01

**Appendix A. System Check Plots**  
(Pls See Appendix A.)

**Appendix B. SAR Measurement Plots**  
(Pls See Appendix B.)

**Appendix C. Calibration Certificate**  
(Pls See Appendix C.)

**Appendix D. Photo documentation**  
(Pls See Appendix D.)

---

**End**