

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band V QPSK 1RB#25 20525CH Rear side 0mm-repeated

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD (SC-FDMA, 10 MHz, QPSK/16QAM); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.982$ S/m; $\epsilon_r = 54.011$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.992 W/kg

Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 7.878 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.28 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.597 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.22 W/kg

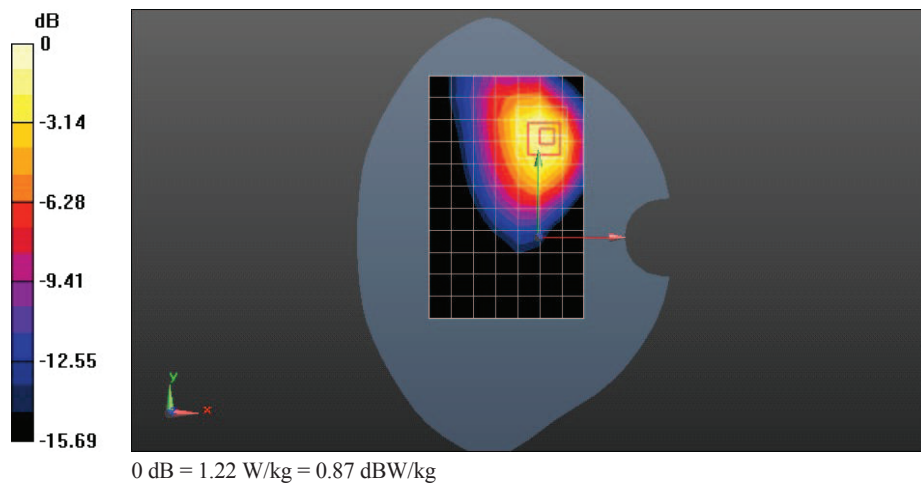

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band V QPSK 1RB#25 20450CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD (SC-FDMA, 10 MHz, QPSK/16QAM); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.975$ S/m; $\epsilon_r = 54.212$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.964 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.861 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.552 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

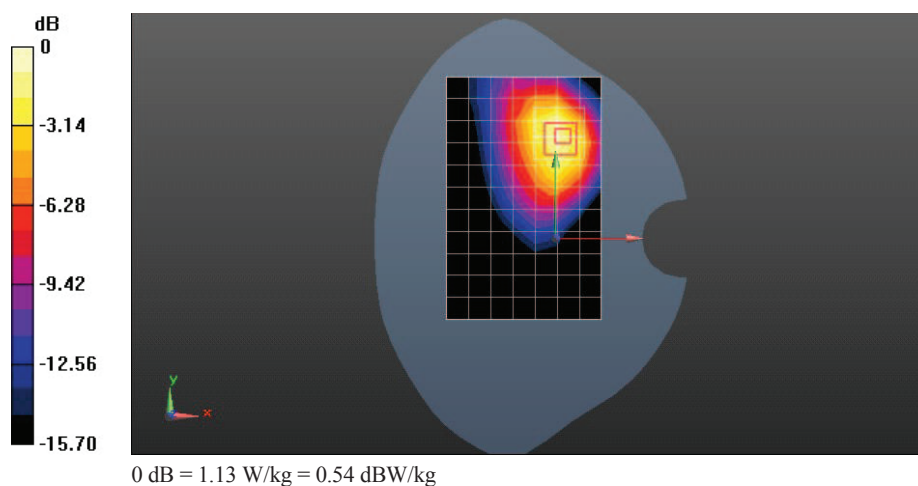

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band V QPSK 1RB#25 20600CH Right side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD (SC-FDMA, 10 MHz, QPSK/16QAM); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844$ MHz; $\sigma = 0.985$ S/m; $\epsilon_r = 54.225$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.178 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.355 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.184 W/kg

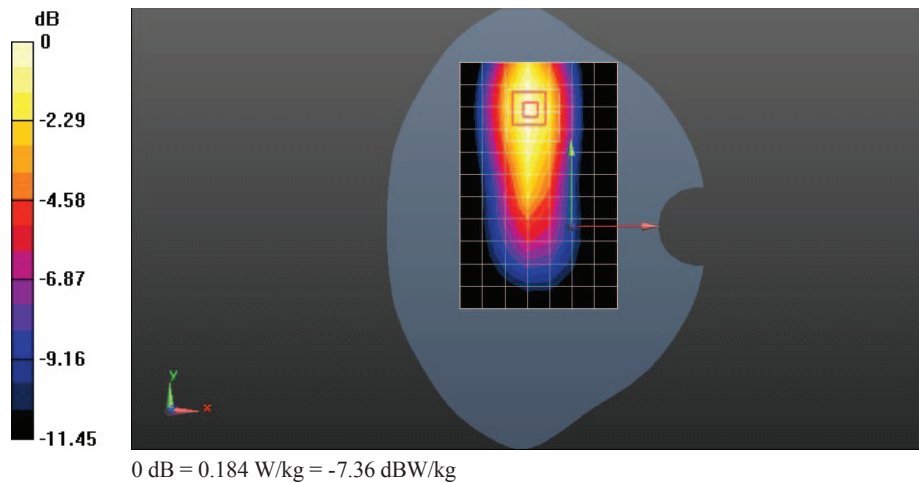

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band V QPSK 1RB#25 20600CH Topt side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD (SC-FDMA, 10 MHz, QPSK/16QAM); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844$ MHz; $\sigma = 0.985$ S/m; $\epsilon_r = 54.225$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.345 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.740 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.429 W/kg

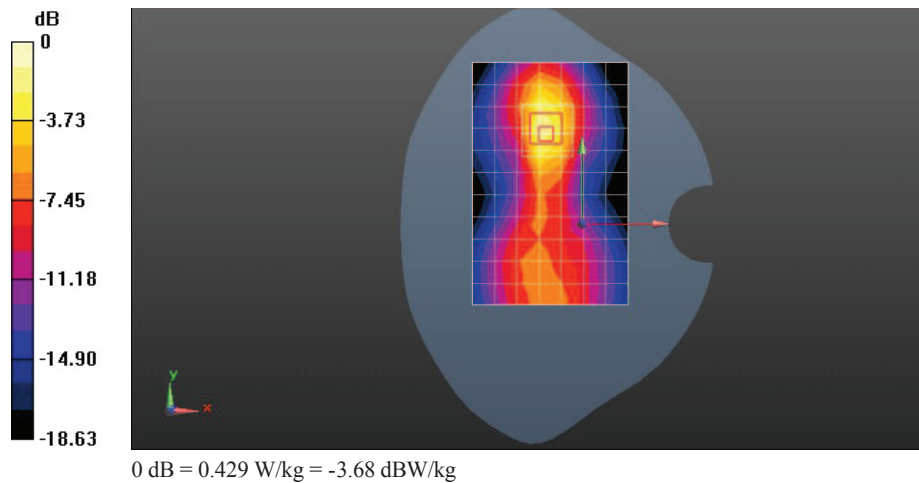

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band V QPSK 50%RB#13 20600CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD (SC-FDMA, 10 MHz, QPSK/16QAM); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844$ MHz; $\sigma = 0.985$ S/m; $\epsilon_r = 54.225$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.904 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.051 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.931 W/kg; SAR(10 g) = 0.504 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

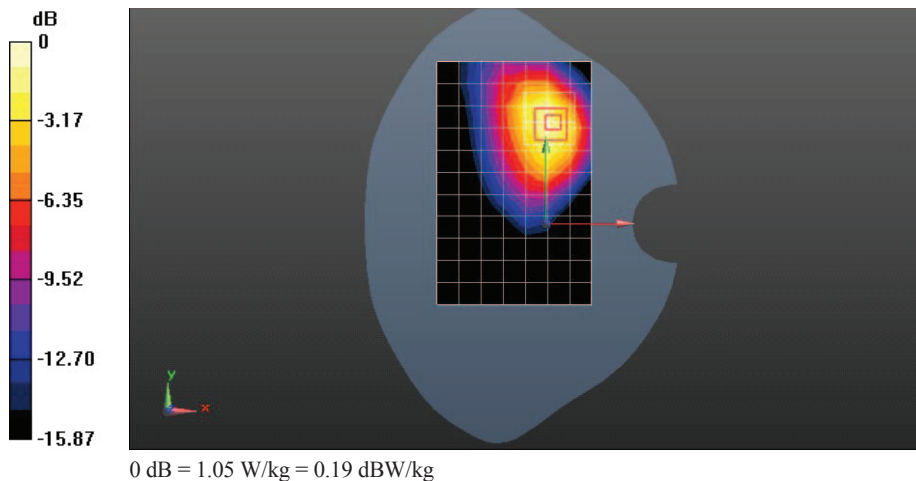

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band V QPSK 50%RB#13 20525CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD (SC-FDMA, 10 MHz, QPSK/16QAM); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.982$ S/m; $\epsilon_r = 54.011$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.04 W/kg

Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 8.144 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.584 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.21 W/kg

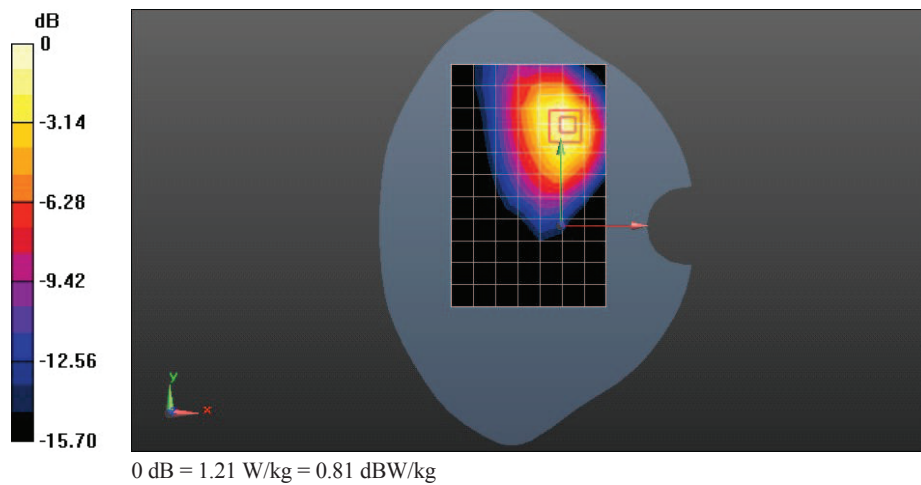

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band V QPSK 50%RB#13 20450CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD (SC-FDMA, 10 MHz, QPSK/16QAM); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.975$ S/m; $\epsilon_r = 54.212$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.924 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.765 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 0.977 W/kg; SAR(10 g) = 0.532 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

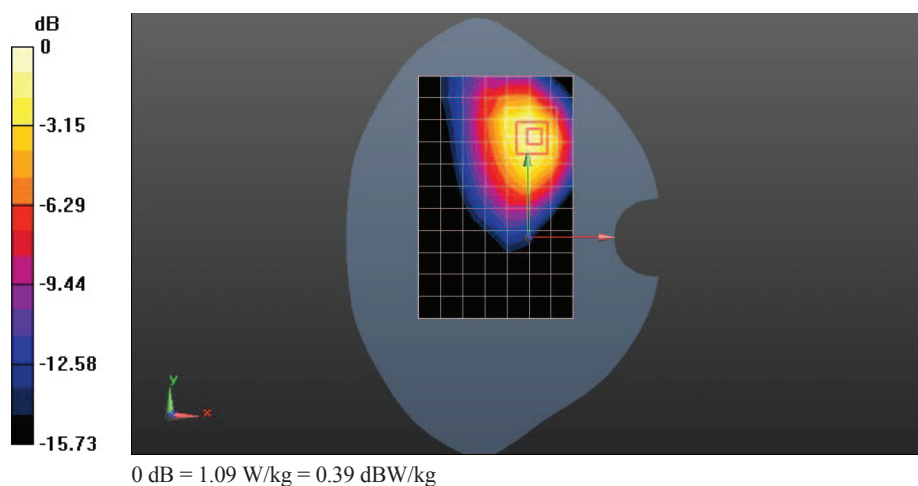

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band V QPSK 50%RB#13 20450CH Right side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD (SC-FDMA, 10 MHz, QPSK/16QAM); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.975$ S/m; $\epsilon_r = 54.212$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.168 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.324 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.172 W/kg

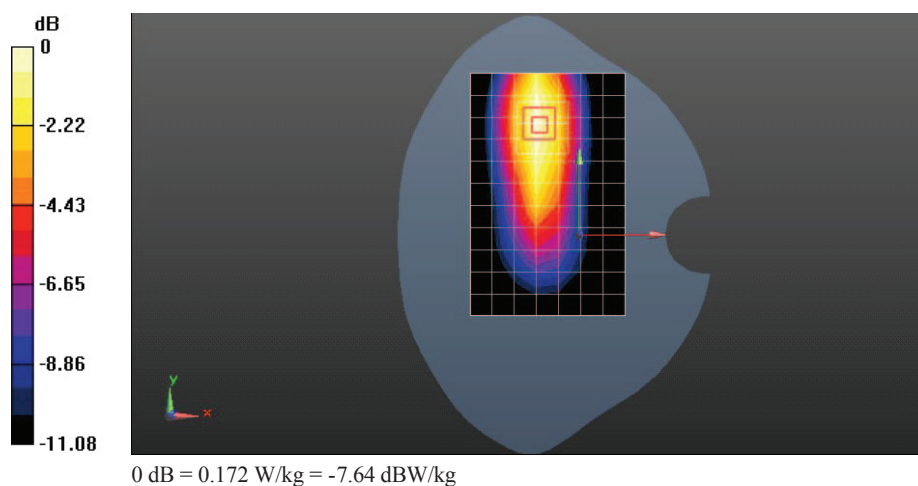

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band V QPSK 50%RB#13 20450CH Topt side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD (SC-FDMA, 10 MHz, QPSK/16QAM); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.975$ S/m; $\epsilon_r = 54.212$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.359 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.758 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.174 W/kg

Maximum value of SAR (measured) = 0.429 W/kg

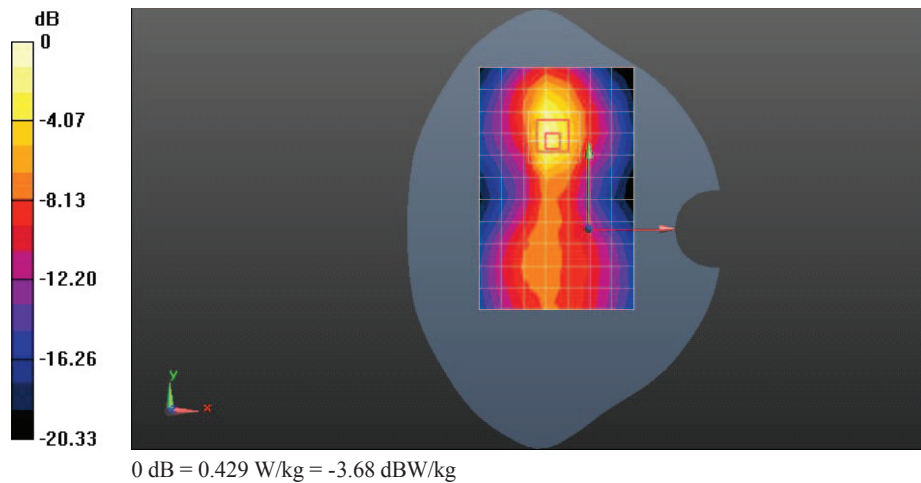

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band V QPSK 100%RB#0 20450CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD (SC-FDMA, 10 MHz, QPSK/16QAM); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.975$ S/m; $\epsilon_r = 54.212$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.888 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.463 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.942 W/kg; SAR(10 g) = 0.513 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

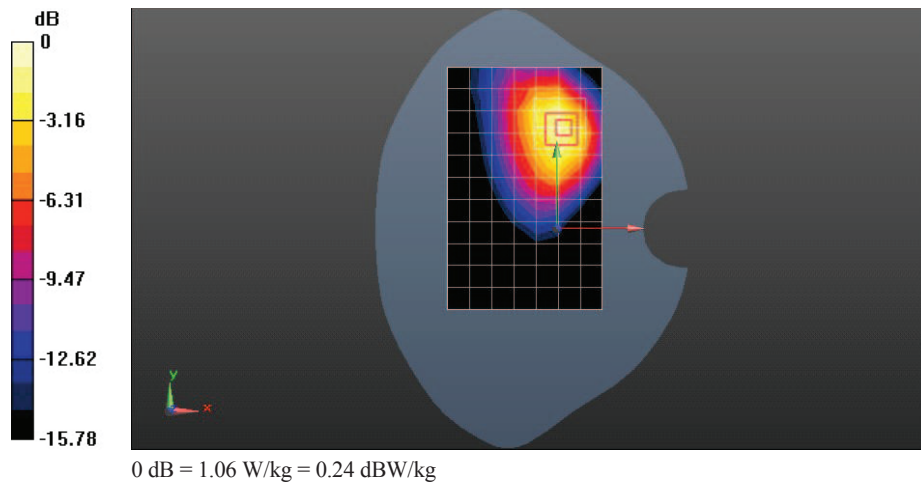

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 1RB#50 21350CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.122$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.13 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.006 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 3.14 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.386 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

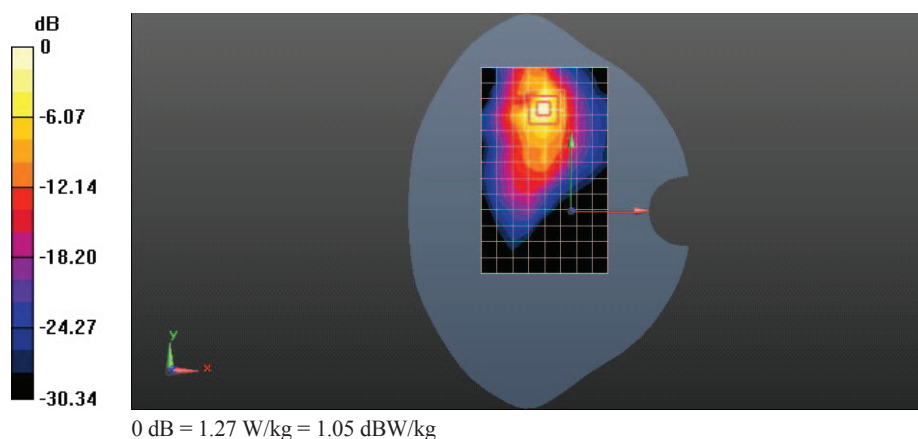

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 1RB#50 21100CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.088$ S/m; $\epsilon_r = 52.958$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.04 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.001 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.93 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.371 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

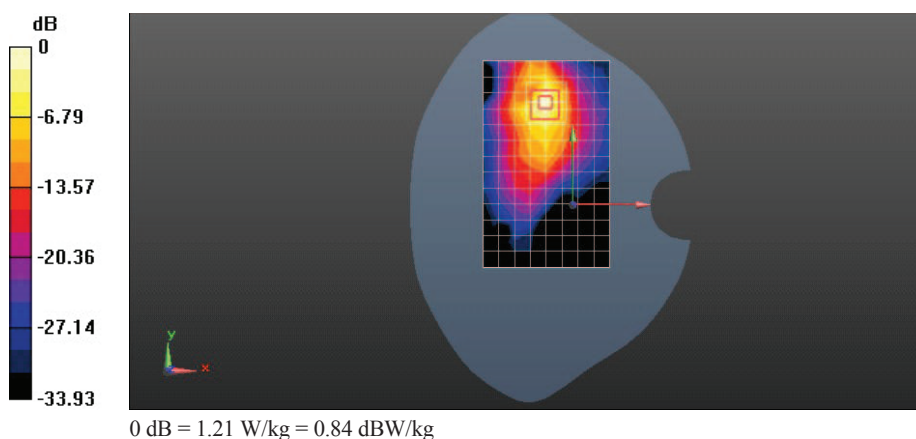

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 1RB#50 20850CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2510 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 2.056$ S/m; $\epsilon_r = 53.226$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.858 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.846 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.38 W/kg

SAR(1 g) = 0.840 W/kg; SAR(10 g) = 0.311 W/kg

Maximum value of SAR (measured) = 0.992 W/kg

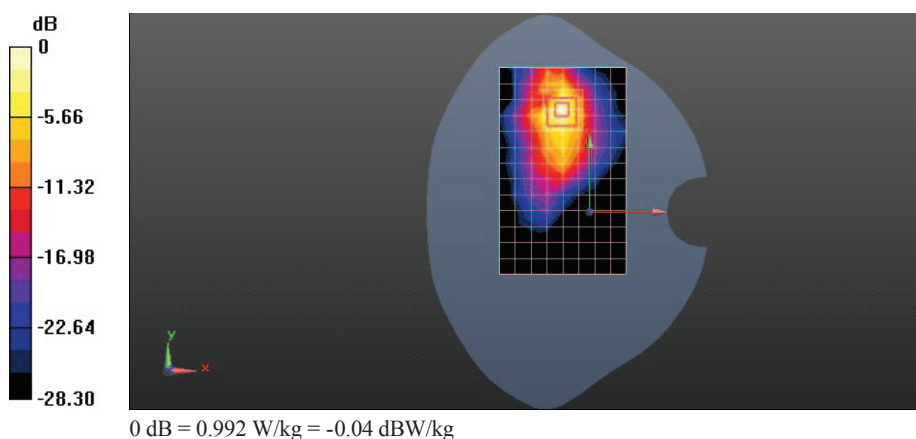

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 1RB#50 21350CH Right side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.122$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -28.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0211 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.181 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0380 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0205 W/kg

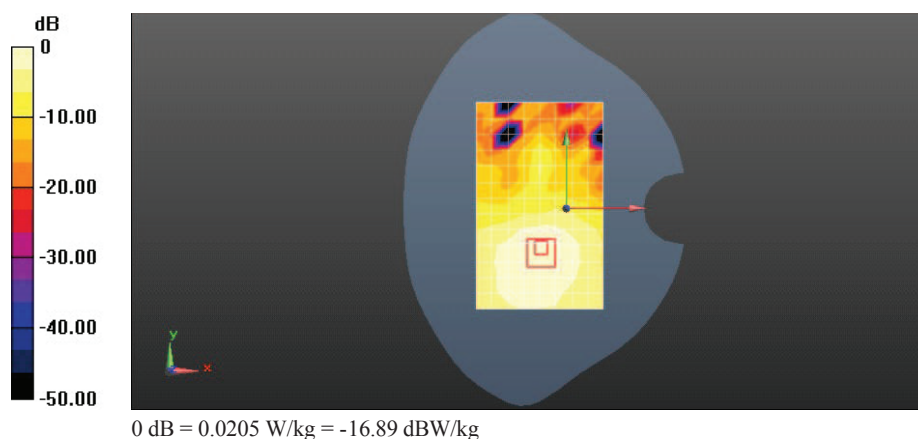

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 1RB#50 21350CH Top side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.122$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.845 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.286 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.86 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.400 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

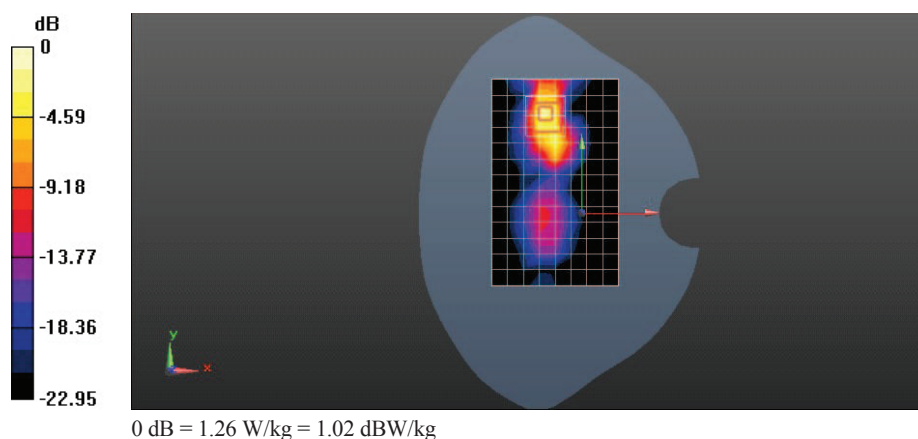

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 1RB#50 21100CH Top side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.088$ S/m; $\epsilon_r = 52.958$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.823 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.990 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.75 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.412 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

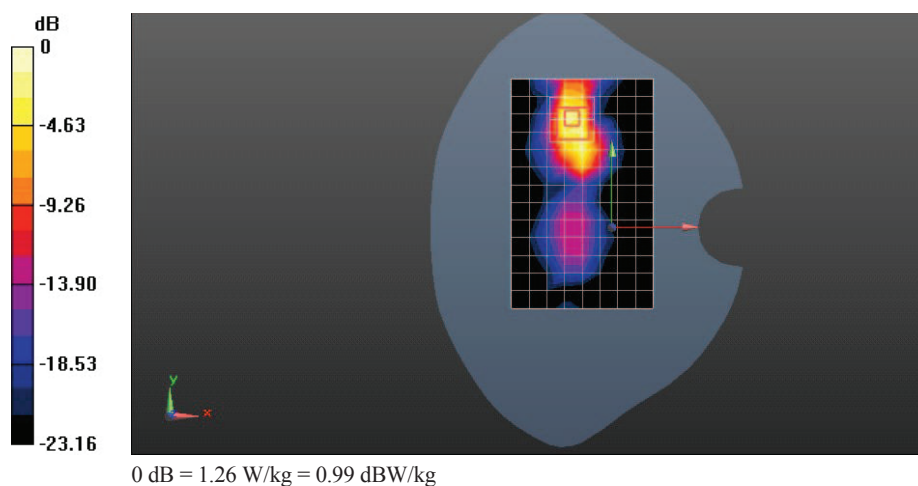

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 1RB#50 20850CH Top side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2510 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 2.056$ S/m; $\epsilon_r = 53.226$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.750 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.329 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 0.921 W/kg; SAR(10 g) = 0.378 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

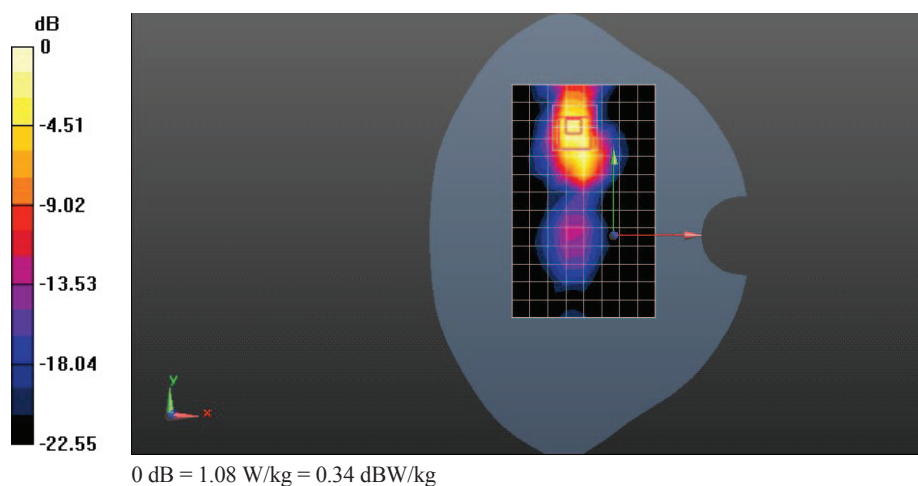

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 50%RB#25 21350CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.122$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.07 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.922 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.06 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.373 W/kg

Maximum value of SAR (measured) = 1.25 W/kg

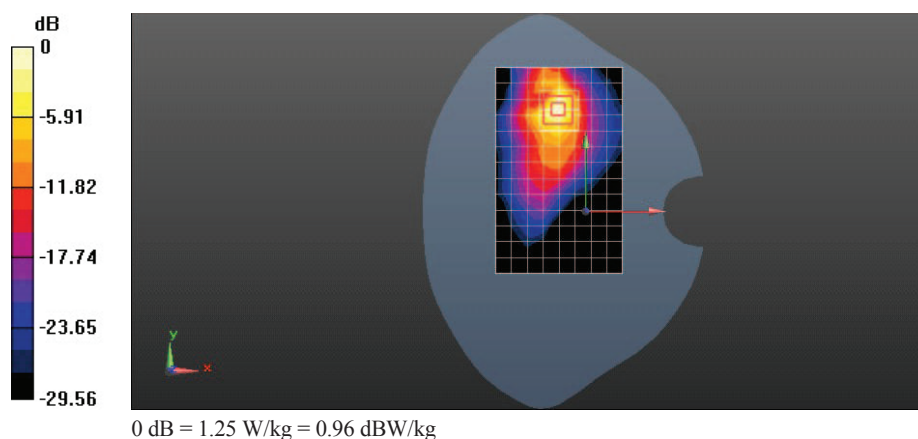

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 50%RB#25 21100CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.088$ S/m; $\epsilon_r = 52.958$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.986 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.081 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 0.959 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

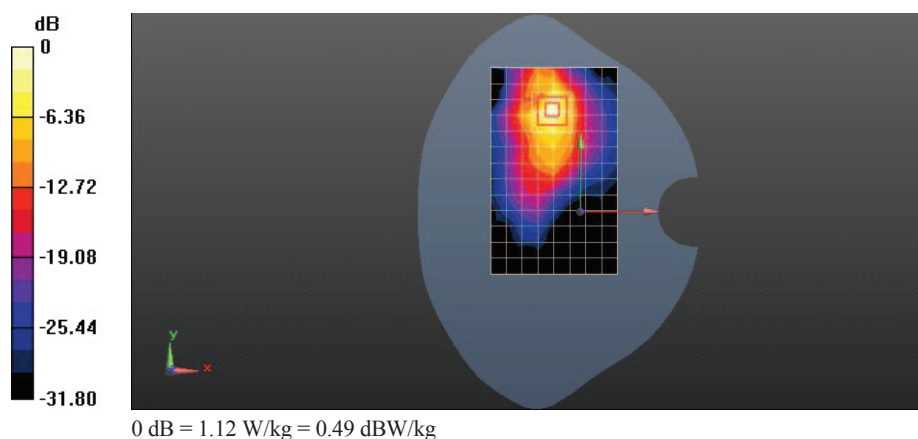

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 50%RB#0 20850CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2510 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 2.056$ S/m; $\epsilon_r = 53.226$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.864 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.837 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 0.839 W/kg; SAR(10 g) = 0.310 W/kg

Maximum value of SAR (measured) = 0.975 W/kg

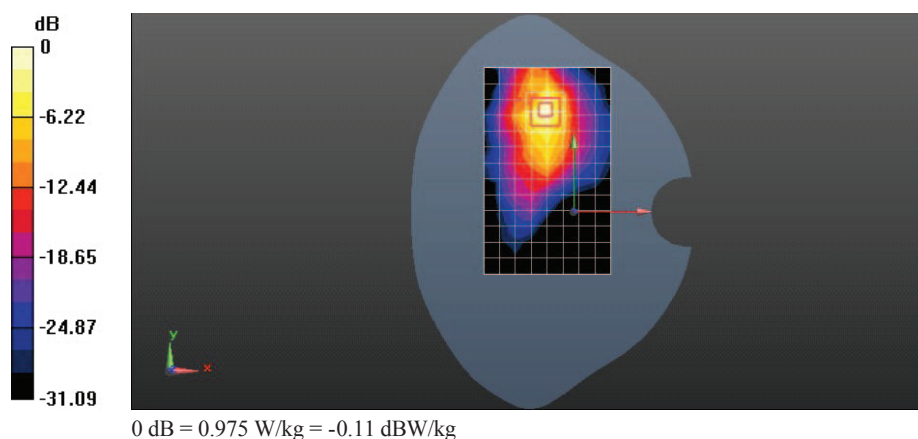

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 50%RB#25 21350CH Right side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.122$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0179 W/kg


Configuration/Body/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.284 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00881 W/kg

Maximum value of SAR (measured) = 0.0178 W/kg

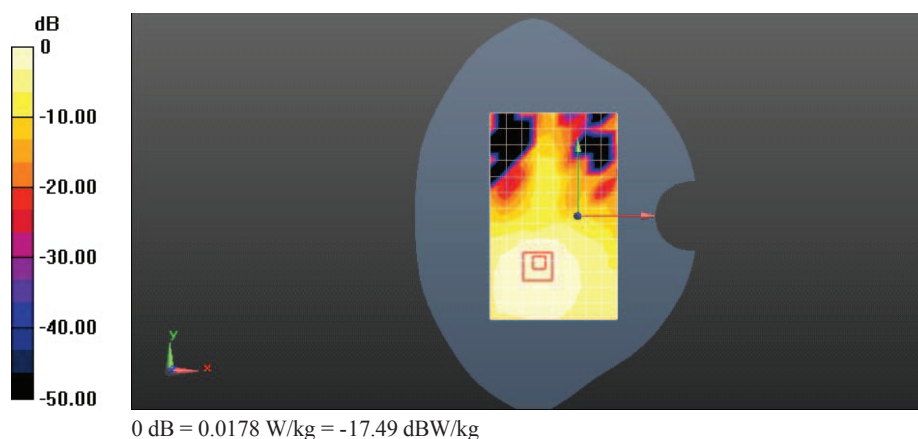

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 50%RB#25 21350CH Top side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.122$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.960 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.015 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 2.85 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.381 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

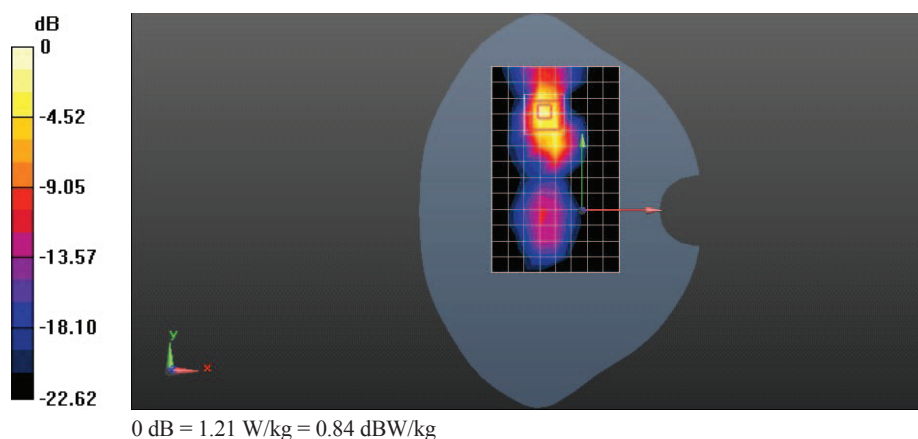

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 50%RB#25 21100CH Top side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.088$ S/m; $\epsilon_r = 52.958$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.919 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.700 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.67 W/kg

SAR(1 g) = 0.982 W/kg; SAR(10 g) = 0.379 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

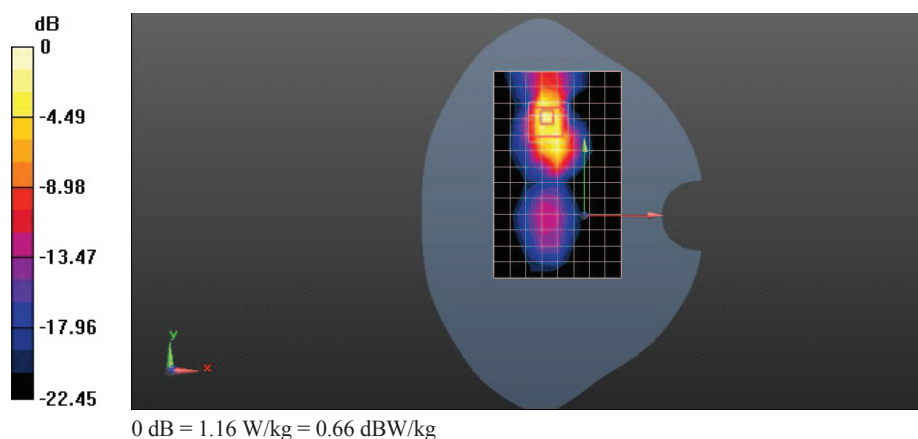

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 50%RB#0 20850CH Top side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2510 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 2.056$ S/m; $\epsilon_r = 53.226$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.853 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.168 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 0.918 W/kg; SAR(10 g) = 0.376 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

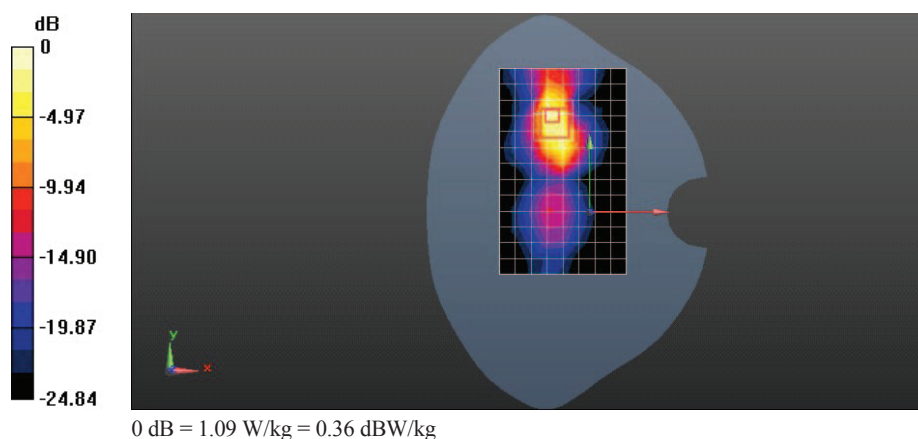

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 100%RB#0 21350CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.122$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.08 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.088 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 3.40 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.394 W/kg

Maximum value of SAR (measured) = 1.36 W/kg

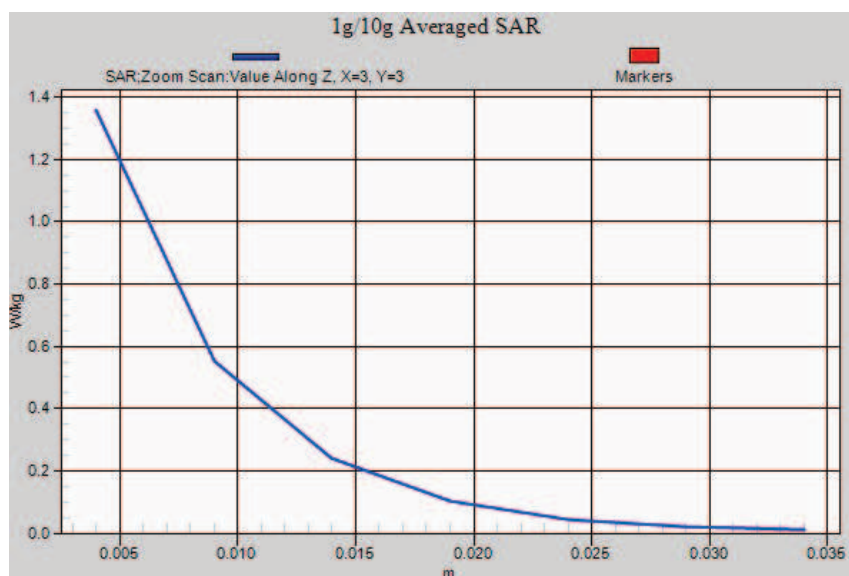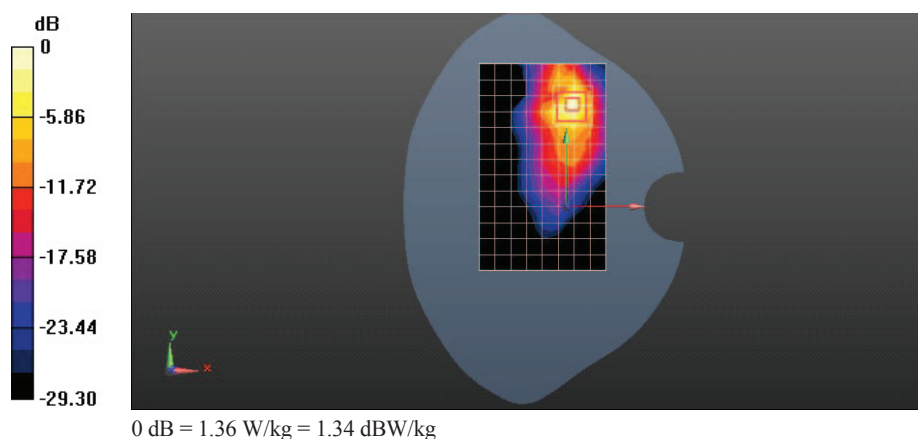

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 100%RB#0 21350CH Rear side 0mm-repeated

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.122$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.09 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.241 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.42 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.395 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

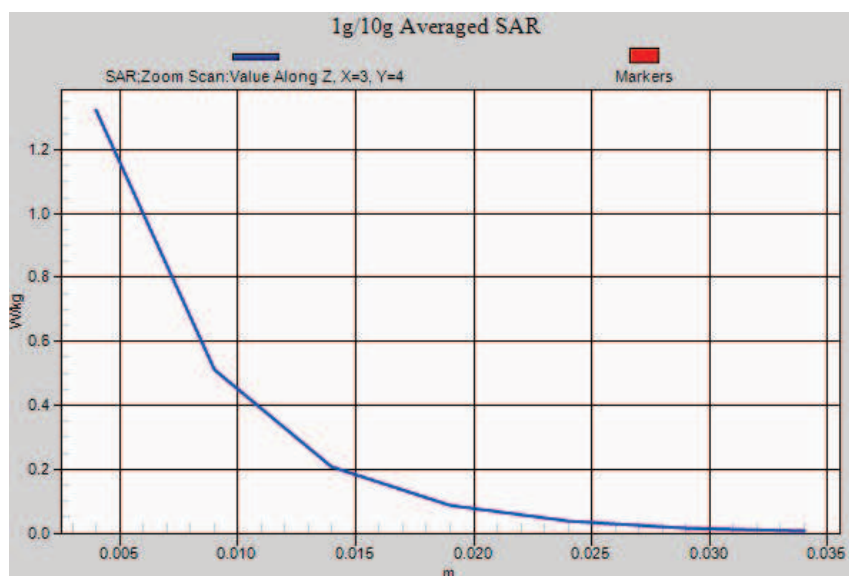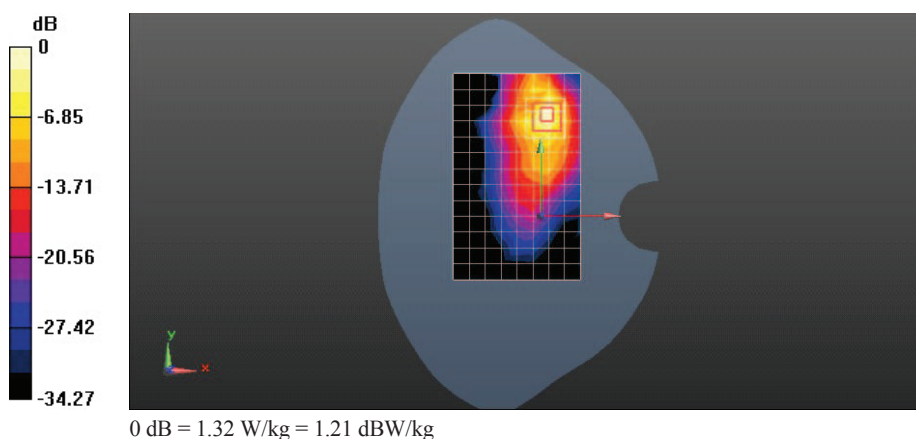

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L LTE Band VII 20M QPSK 100%RB#0 21350CH Top side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: LTE-FDD(SC-FDMA,20MHz,QPSK/16QAM); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.122$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.2, 4.2, 4.2); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.09 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.825 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 2.80 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

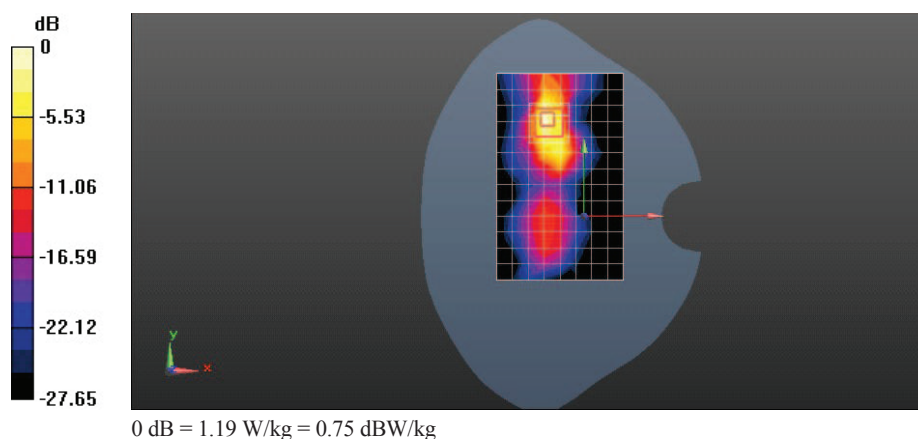

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11b 11CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 2.023$ S/m; $\epsilon_r = 52.011$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.07 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.908 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.85 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.461 W/kg

Maximum value of SAR (measured) = 1.33 W/kg

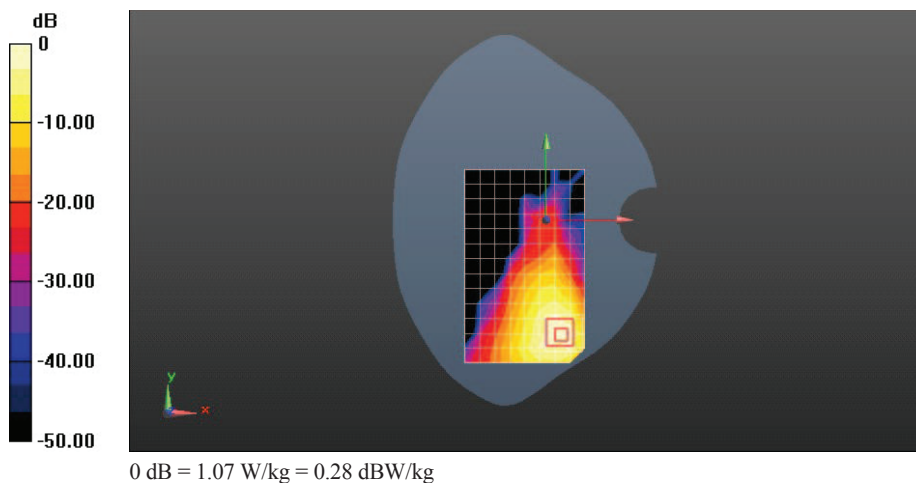

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11b 6CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.985$ S/m; $\epsilon_r = 52.099$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.999 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.988 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 3.02 W/kg

SAR(1 g) = 0.982 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

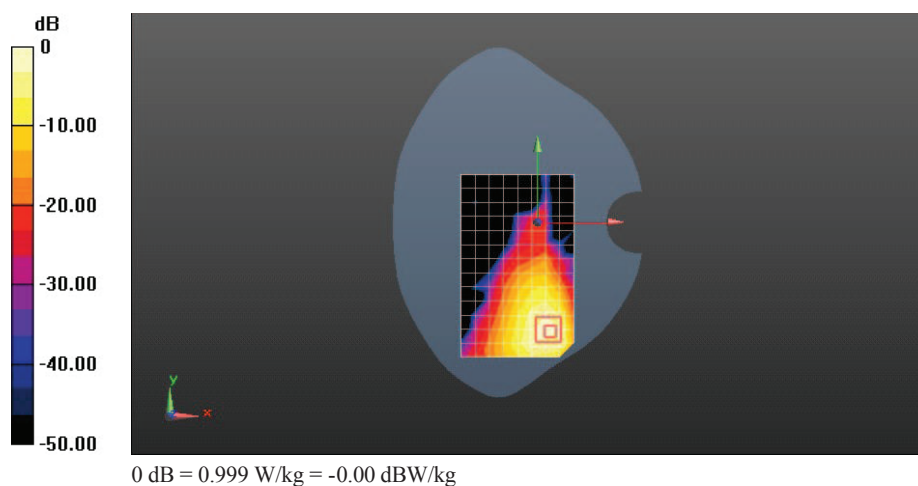

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11b 1CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 52.269$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.12 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.935 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.80 W/kg

SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.481 W/kg

Maximum value of SAR (measured) = 1.41 W/kg

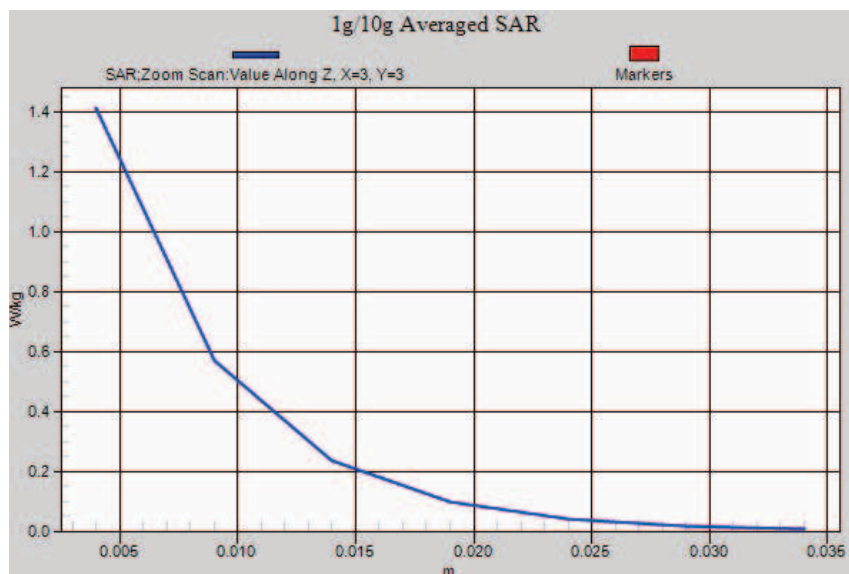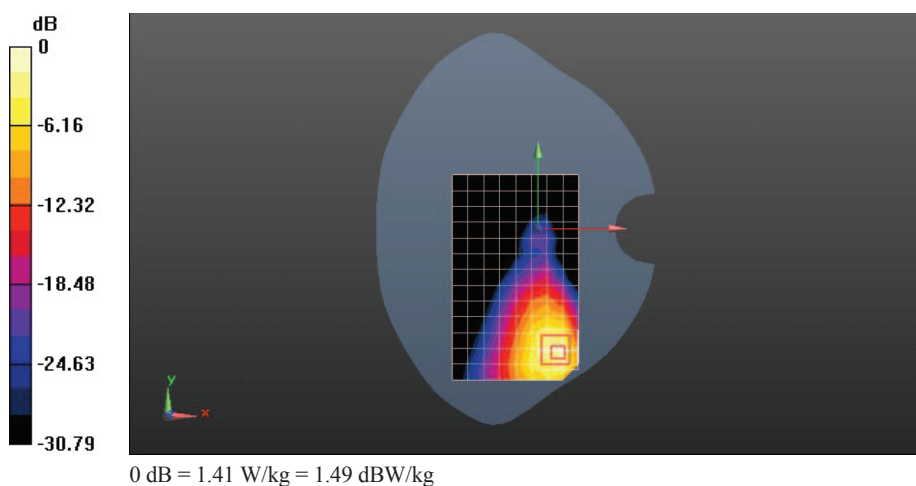

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11b 1CH Rear side 0mm-repeated

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 52.269$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.35 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.092 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.460 W/kg

Maximum value of SAR (measured) = 1.31 W/kg

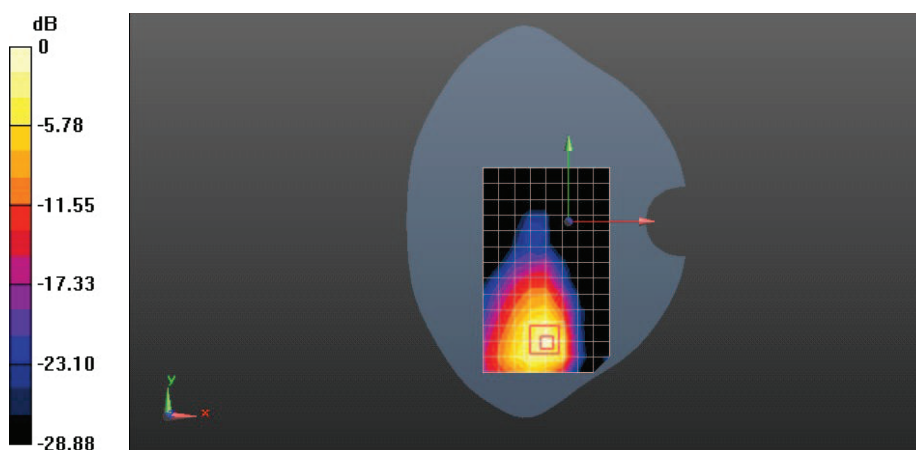

0 dB = 1.31 W/kg = 1.17 dBW/kg

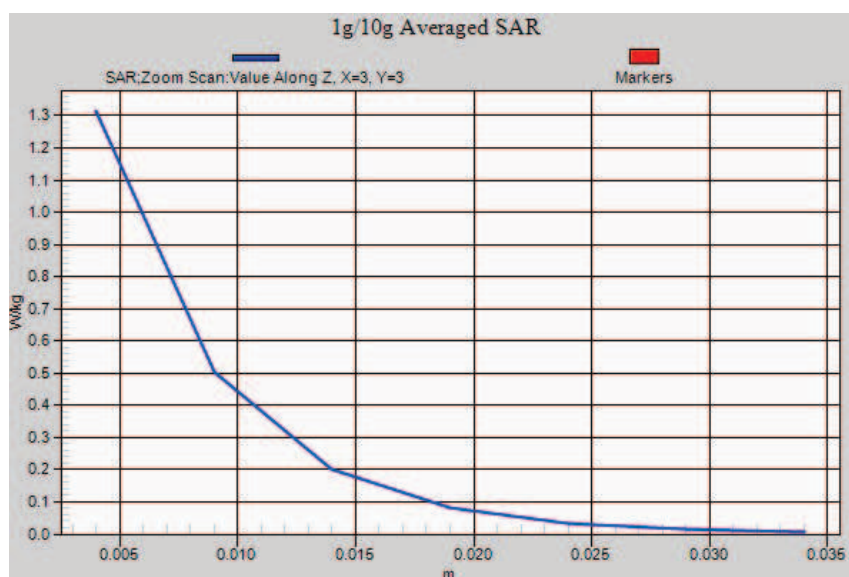

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11b 6CH Left side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.985$ S/m; $\epsilon_r = 52.099$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.146 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.856 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.389 W/kg

SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

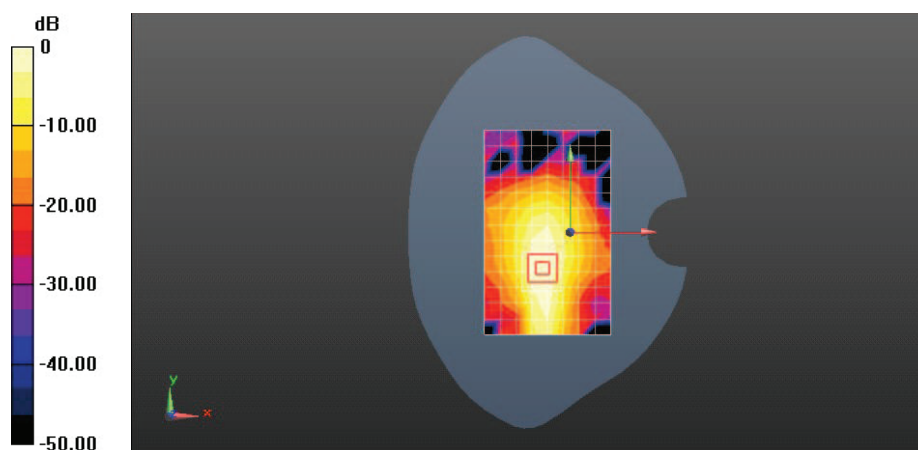

0 dB = 0.146 W/kg = -8.35 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11b 6CH Top side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.985$ S/m; $\epsilon_r = 52.099$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.302 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.236 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.783 W/kg

SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.349 W/kg

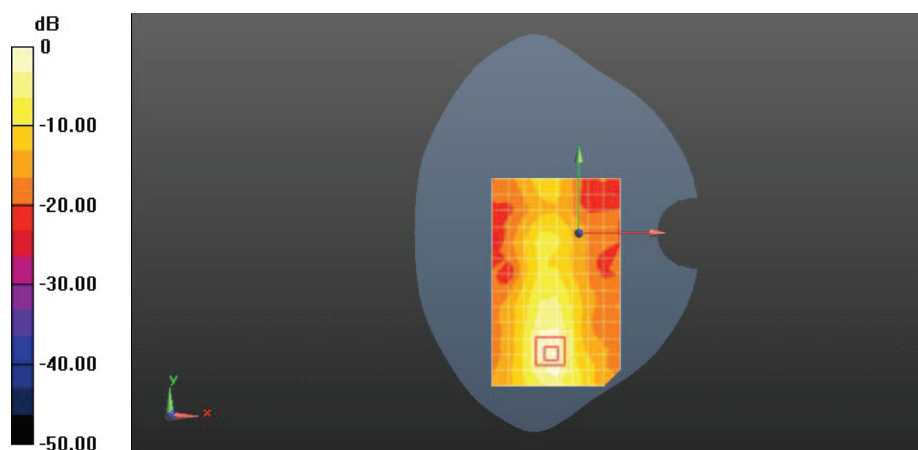

0 dB = 0.302 W/kg = -5.19 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11a 36CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.161$ S/m; $\epsilon_r = 46.975$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(4.2, 4.2, 4.2); Calibrated: 2013-5-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.851 W/kg


Configuration/Body/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.627 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 3.57 W/kg

SAR(1 g) = 0.752 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 1.98 W/kg

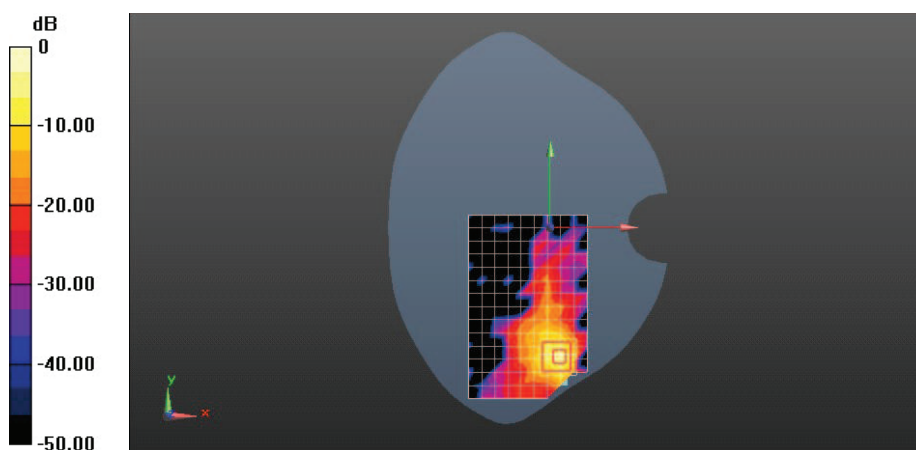

0 dB = 1.98 W/kg = 2.97 dBW/kg

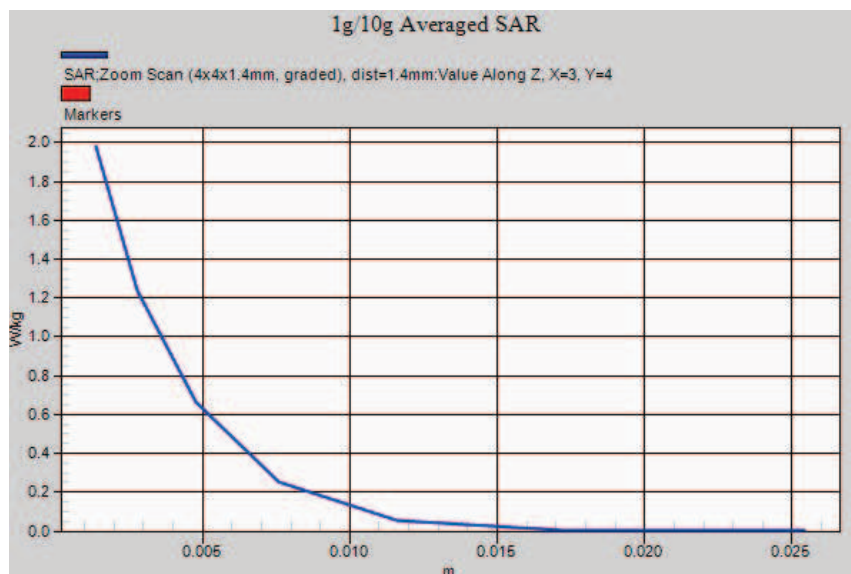

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11a 36CH Left side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.161$ S/m; $\epsilon_r = 46.975$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(4.2, 4.2, 4.2); Calibrated: 2013-5-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.162 W/kg


Configuration/Body/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 4.463 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.571 W/kg

SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.363 W/kg

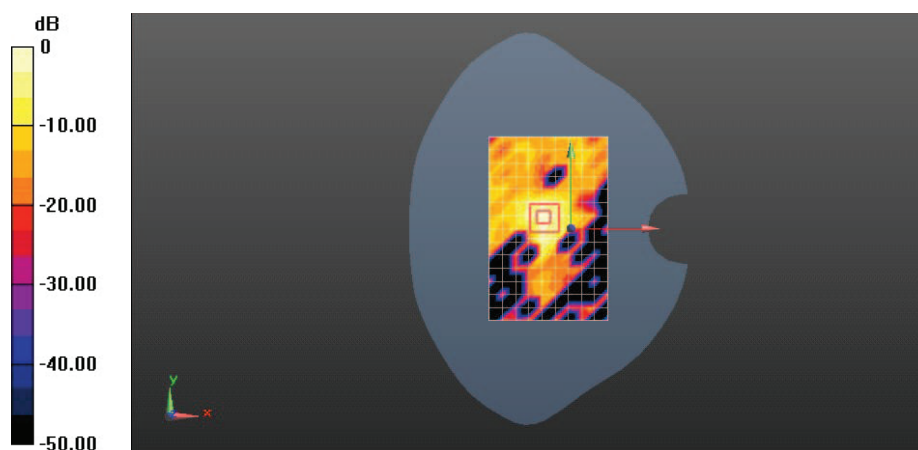

0 dB = 0.162 W/kg = -7.91 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11a 36CH Top side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.161$ S/m; $\epsilon_r = 46.975$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(4.2, 4.2, 4.2); Calibrated: 2013-5-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.383 W/kg


Configuration/Body/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.390 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.825 W/kg

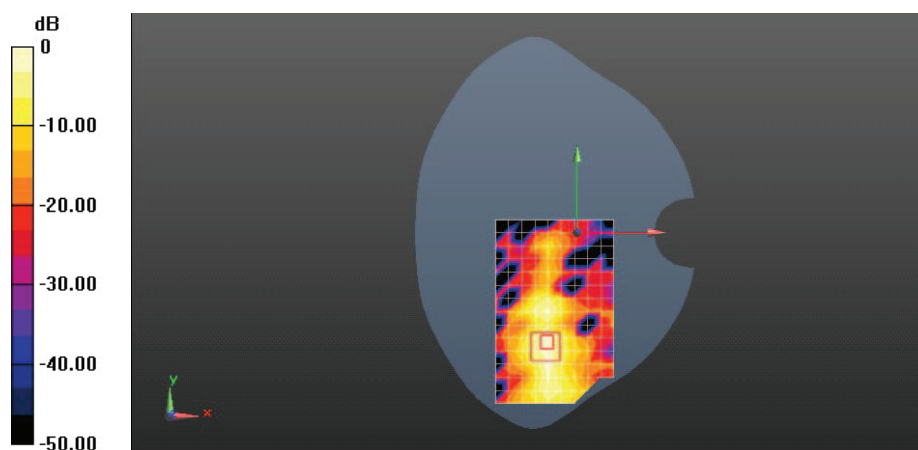

0 dB = 0.383 W/kg = -4.17 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11a 60CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.624$ S/m; $\epsilon_r = 47.422$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(4.08, 4.08, 4.08); Calibrated: 2013-5-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.786 W/kg


Configuration/Body/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.644 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 3.72 W/kg

SAR(1 g) = 0.745 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 1.93 W/kg

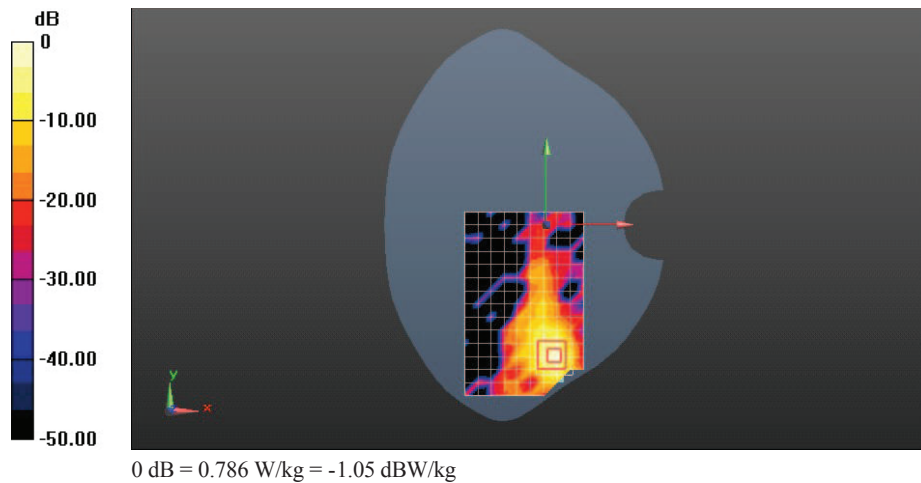

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11a 60CH Left side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.624$ S/m; $\epsilon_r = 47.422$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(4.08, 4.08, 4.08); Calibrated: 2013-5-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.165 W/kg


Configuration/Body/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.643 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.642 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.379 W/kg

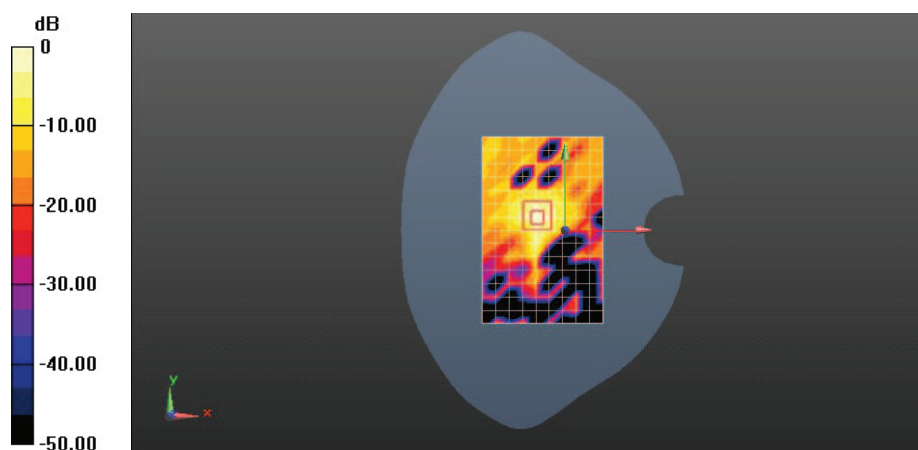

0 dB = 0.165 W/kg = -7.82 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11a 60CH Top side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.624$ S/m; $\epsilon_r = 47.422$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(4.08, 4.08, 4.08); Calibrated: 2013-5-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.557 W/kg

Configuration/Body/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.510 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 0.479 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 1.24 W/kg


Configuration/Body/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 1: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.510 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

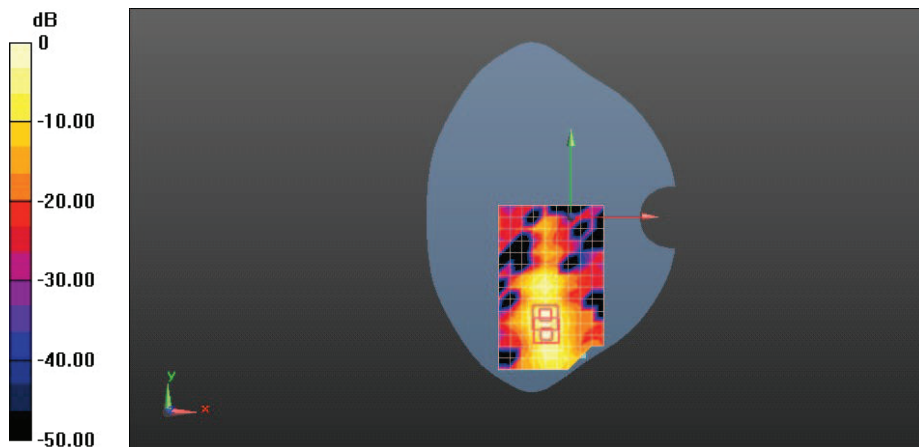

0 dB = 0.557 W/kg = -2.54 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11a 108CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 5540 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5540$ MHz; $\sigma = 5.828$ S/m; $\epsilon_r = 47.177$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(3.89, 3.89, 3.89); Calibrated: 2013-5-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.639 W/kg


Configuration/Body/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.423 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 1.48 W/kg

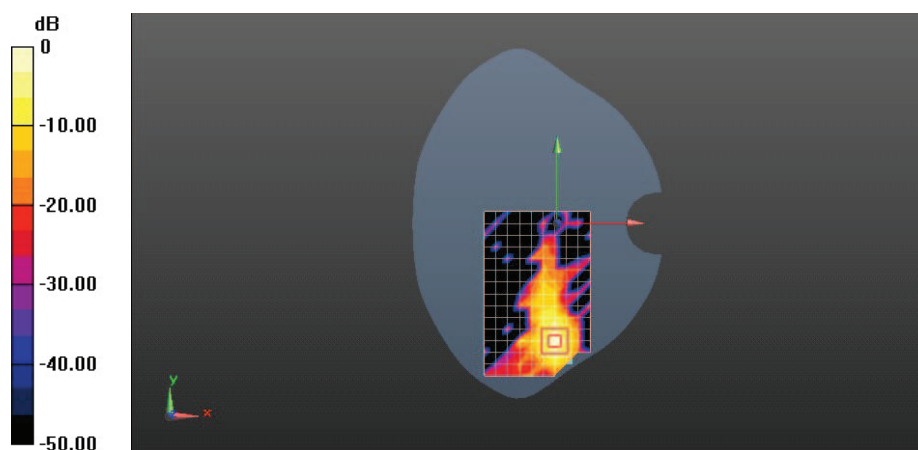

0 dB = 0.639 W/kg = -1.95 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11a 108CH Left side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 5540 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5540$ MHz; $\sigma = 5.828$ S/m; $\epsilon_r = 47.177$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(3.89, 3.89, 3.89); Calibrated: 2013-5-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.101 W/kg


Configuration/Body/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.479 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.253 W/kg

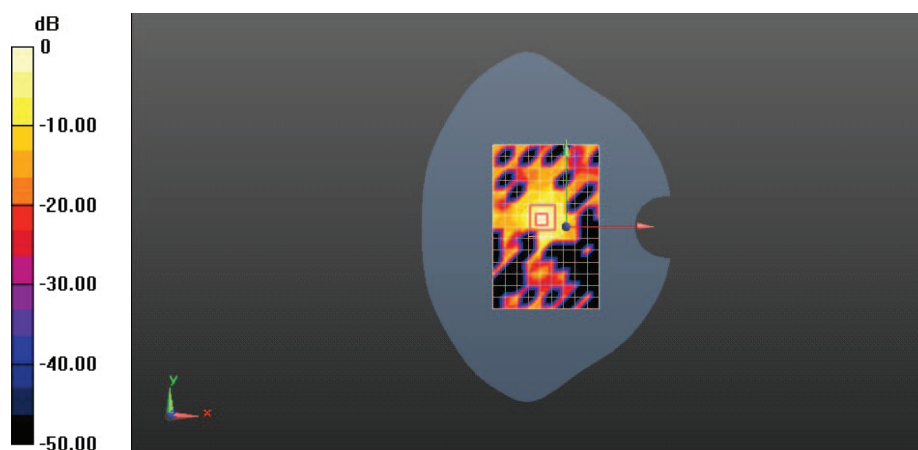

0 dB = 0.101 W/kg = -9.95 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11a 108CH Top side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 5540 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5540$ MHz; $\sigma = 5.828$ S/m; $\epsilon_r = 47.177$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(3.89, 3.89, 3.89); Calibrated: 2013-5-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.778 W/kg


Configuration/Body/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.200 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.31 W/kg

SAR(1 g) = 0.678 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 1.70 W/kg

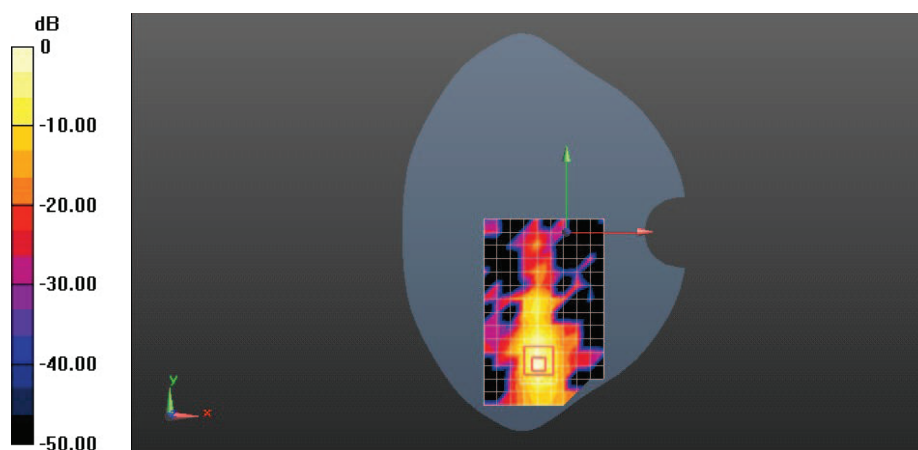

0 dB = 0.778 W/kg = -1.09 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11a 149CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745$ MHz; $\sigma = 6.075$ S/m; $\epsilon_r = 47.409$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(4.16, 4.16, 4.16); Calibrated: 2013-5-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.524 W/kg


Configuration/Body/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.595 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.65 W/kg

SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 1.40 W/kg

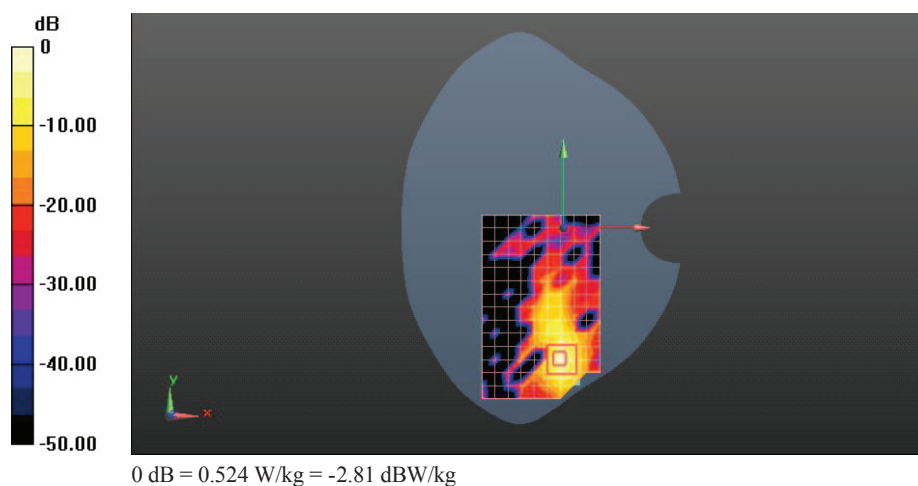

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11a 149CH Left side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745$ MHz; $\sigma = 6.075$ S/m; $\epsilon_r = 47.409$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(4.16, 4.16, 4.16); Calibrated: 2013-5-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0615 W/kg


Configuration/Body/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.448 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.133 W/kg

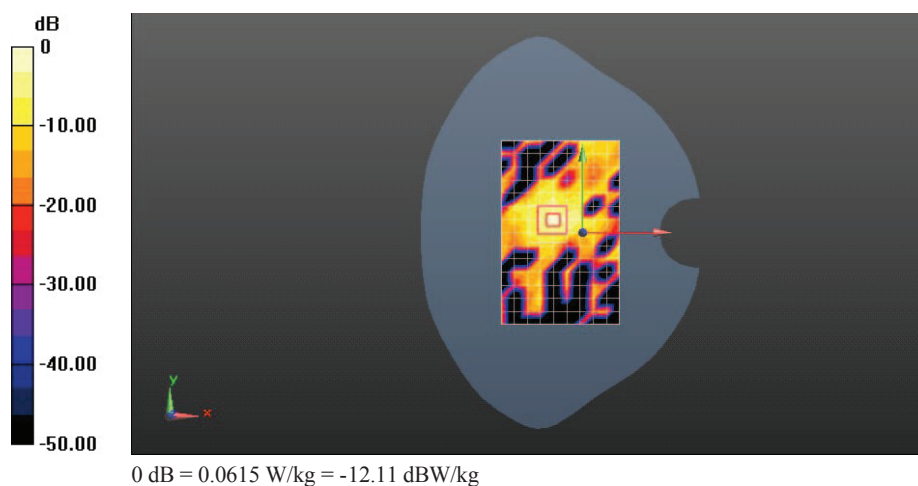

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L WiFi 802.11a 149CH Top side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745$ MHz; $\sigma = 6.075$ S/m; $\epsilon_r = 47.409$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(4.16, 4.16, 4.16); Calibrated: 2013-5-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.792 W/kg


Configuration/Body/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.132 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.97 W/kg

SAR(1 g) = 0.751 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 2.06 W/kg

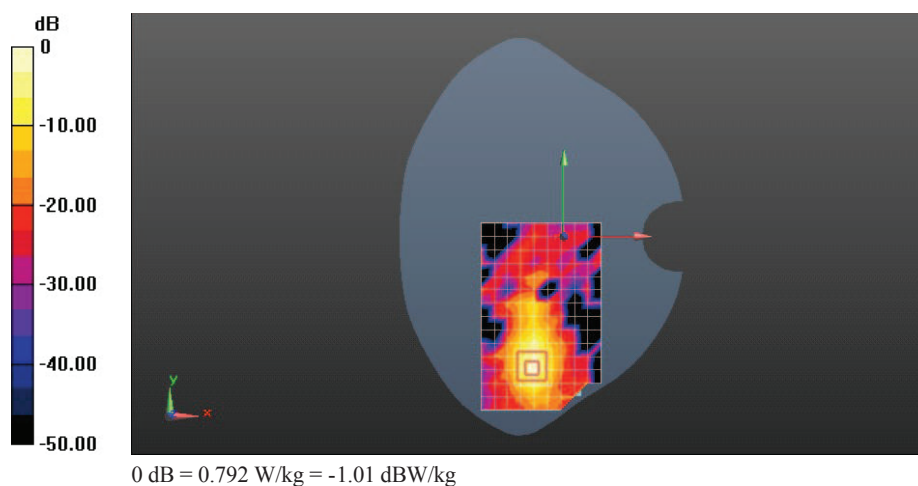

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L BT 39CH Rear side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: BT; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441$ MHz; $\sigma = 2.008$ S/m; $\epsilon_r = 51.999$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0429 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.025V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0577 W/kg

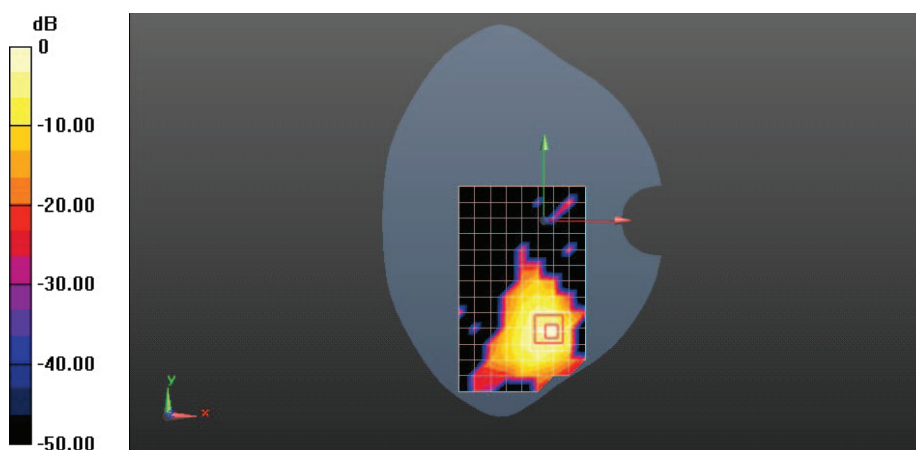

0 dB = 0.0577 W/kg = -12.39 dBW/kg

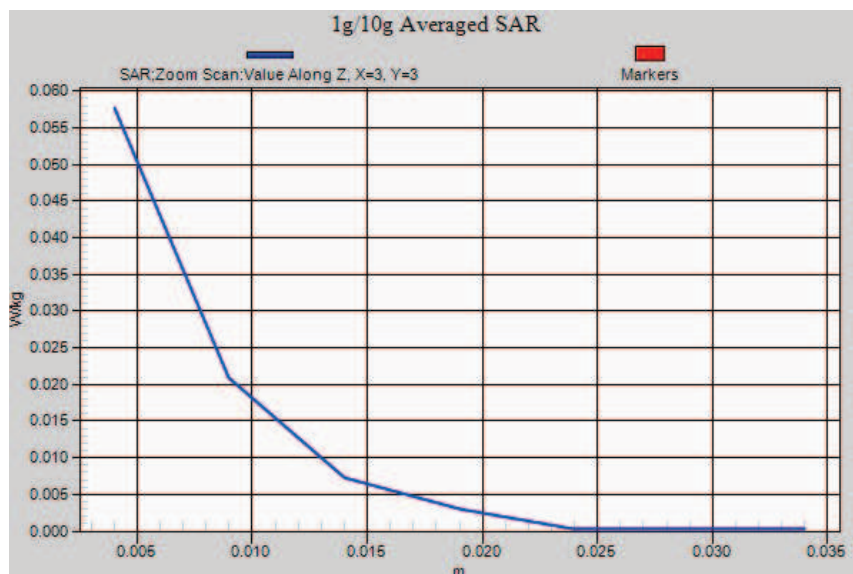

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L BT 39CH Left side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: BT; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441$ MHz; $\sigma = 2.008$ S/m; $\epsilon_r = 51.999$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.00764 W/kg


Configuration/Body/Zoom Scan (8x10x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.305 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.00791 W/kg; SAR(10 g) = 0.00266 W/kg

Maximum value of SAR (measured) = 0.00780 W/kg

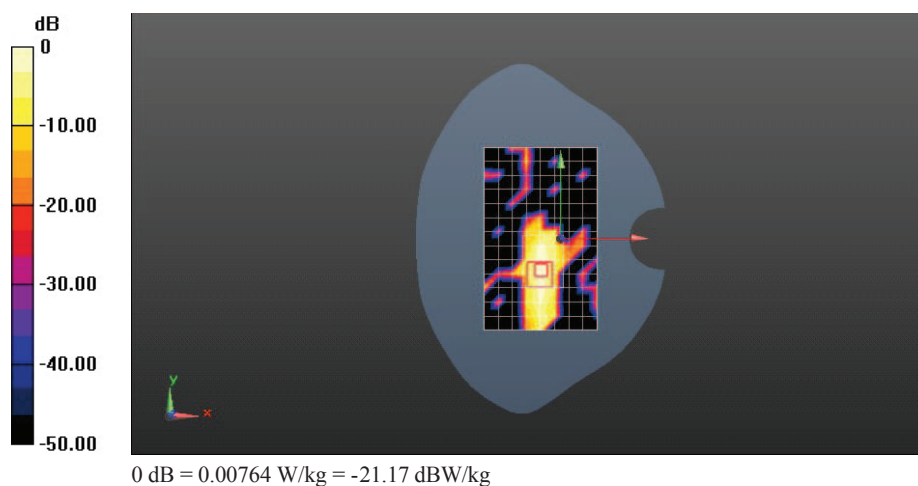

Test Laboratory: HUAWEI SAR/HAC Lab

S10-201L BT 39CH Top side 0mm

DUT: S10-102L; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: BT; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441$ MHz; $\sigma = 2.008$ S/m; $\epsilon_r = 51.999$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1305; Calibrated: 2013-1-8
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.00915 W/kg

Configuration/Body/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.301 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.0096 W/kg; SAR(10 g) = 0.00332 W/kg

Maximum value of SAR (measured) = 0.0120 W/kg

