



EMC Test Report

Product Name: HUAWEI MediaPad 7 Vogue

Model Number: S7-601w

Report No: SYBH(Z-EMC)105032013-2

FCC ID: QISS7-601W

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
4. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
5. The test report is invalid if not marked with "exclusive stamp for the test report".
6. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
7. The test report is invalid if there is any evidence of erasure and/or falsification.
8. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
9. Normally, the test report is only responsible for the samples that have undergone the test.
10. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.

Applicant: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt Test Item: Apr.13, 2013
Start Date of Test: Apr.13, 2013
End Date of Test: Apr.17, 2013

Test Result: Pass

**Approved By
(Lab Manager)**

2013-04-22 Date	Liuchunlin Name	 Signature
---------------------------	---------------------------	--

Operator

213-04-22 Date	Wenjianfeng Name	 Signature
--------------------------	----------------------------	--

Modification Record

No.	Last Report No.	Modification Description
1	NA	First report

TABLE OF CONTENT

1	General Information	6
1.1	EUT Description.....	6
1.2	Test Site Information.....	7
1.3	Applied Standards	7
2	Summary of Results	8
3	System Configuration during EMC Test	9
3.1	Test Mode	9
3.2	Test System Configuration	9
3.3	Cables Used during Test	10
3.4	Associated Equipment Used during Test	10
4	Electromagnetic Interference (EMI).....	11
4.1	Radiated Disturbance 30MHz to 18GHz	11
4.2	Conducted Disturbance 0.15 MHz to 30MHz	14
5	Main Test Instruments	15
6	System Measurement Uncertainty	16
7	Test Data and Graph	17
7.1	Radiated Disturbance	17
7.2	Conducted Disturbance	19

1 General Information

1.1 EUT Description

EUT Description	
Product Name	HUAWEI MediaPad 7 Vogue
Model Number	S7-601w
Serials Number	B4G01A9332000148
Working Voltage	5Vdc
TX Frequency	Bluetooth: 2400MHz To 2483.5MHz WIFI: 2400MHz To 2483.5MHz
RX Frequency	Bluetooth: 2400MHz To 2483.5MHz WIFI: 2400MHz To 2483.5MHz GPS: 1570MHz To 1580 MHz
HW Version	SH1S7601UM
SW Version	S7-601wV100R001C001B005
EUT Accessory	
Data cable	Data Cable USB A Male to Micro USB Male
Adapter	BRAND: HUAWEI Model: HW-050200U3W Input voltage: 100V-240V ~50-60Hz, 0.5A Output voltage: +5V $\overline{\text{---}}$ 2A S/N: HWHKAACC1801709

Remark: The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details.

1.2 Test Site Information

Test Site 1:	RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD.
Test Site Location:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.3 Applied Standards

APPLIED STANDARD

47 CFR FCC Part 15:2012, Subpart B

2 Summary of Results

Summary of Results				
Test Items	Test Mode	Performance Class & Required Performance Criteria	Result	Site
<u>Radiated Emissions</u> Enclosure Port	Mode2 Mode3	CLASS B	Pass	Site1
<u>Conducted Emissions</u> <input checked="" type="checkbox"/> DC Power Port <input checked="" type="checkbox"/> AC Power Port <input type="checkbox"/> Telecommunication Ports	Mode1 Mode2	CLASS B	Pass	Site1
Note: 1, Measurement taken is within the uncertainty of test system. 2, <input checked="" type="checkbox"/> The item has been tested; <input type="checkbox"/> The item has not been tested.				

During the measurement, the environmental conditions complied with the range listed as below.

Item	Required
Ambient temperature	15°C ~ 35°C
Relative humidity	25% ~ 75%
Atmospheric pressure	86kPa ~ 106kPa

3 System Configuration during EMC Test

3.1 Test Mode

The EUT was configured, installed, arranged and operated in a manner consistent with typical application; the following mode(s) were applied during the compliance test.

Test Mode	
Mode 1:	Adapter (charge) + TF Card + earphone + Camera on +wireless service traffic mode
Mode 2:	Adapter (charge) + TF Card + earphone + Camera on +wireless service IDLE mode
Mode 3:	PC (Power supply and USB xcopy) + TF card + earphone + wireless service IDLE mode

Remark: If there is more than one adapter, each one should be applied throughout the compliance test respectively, however, only the worst case will be recorded in this report.


Traffic Mode:


State of EUT when switched on and with Radio Resource Control (RRC) connection established

IDLE Mode:

State of EUT when switched on but with no Radio Resource Control (RRC) connection

3.2 Test System Configuration

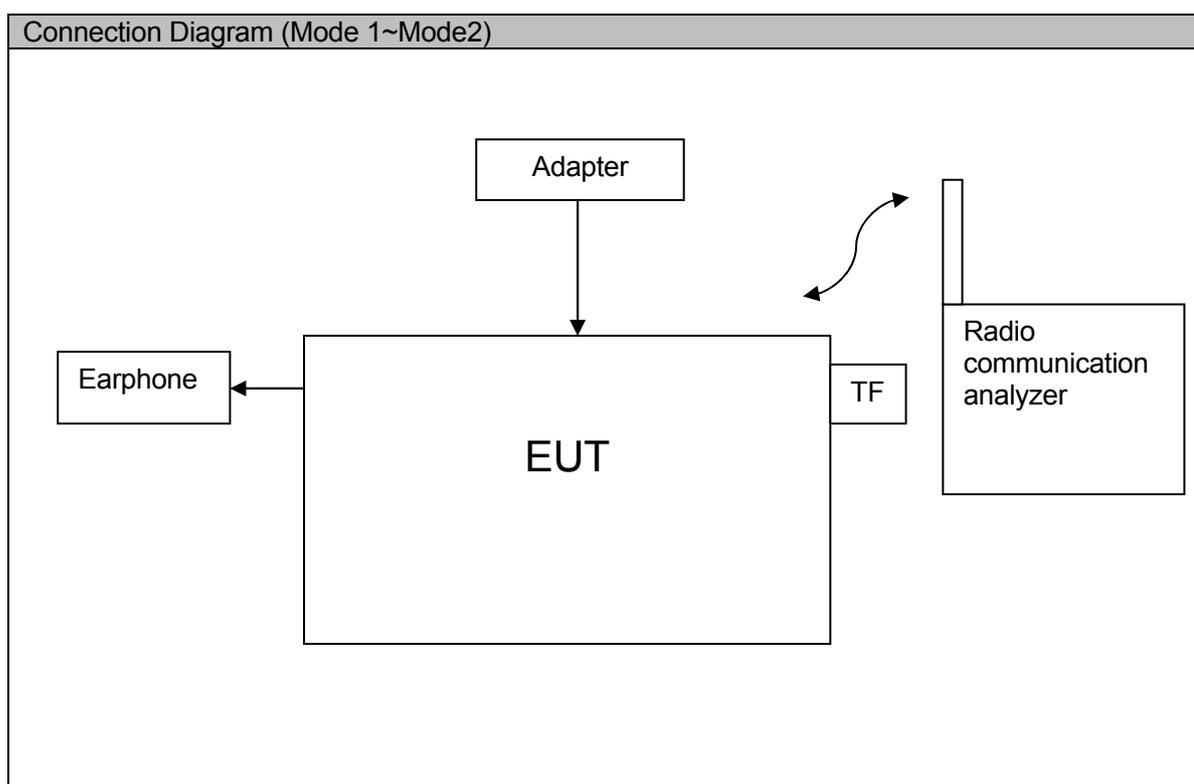

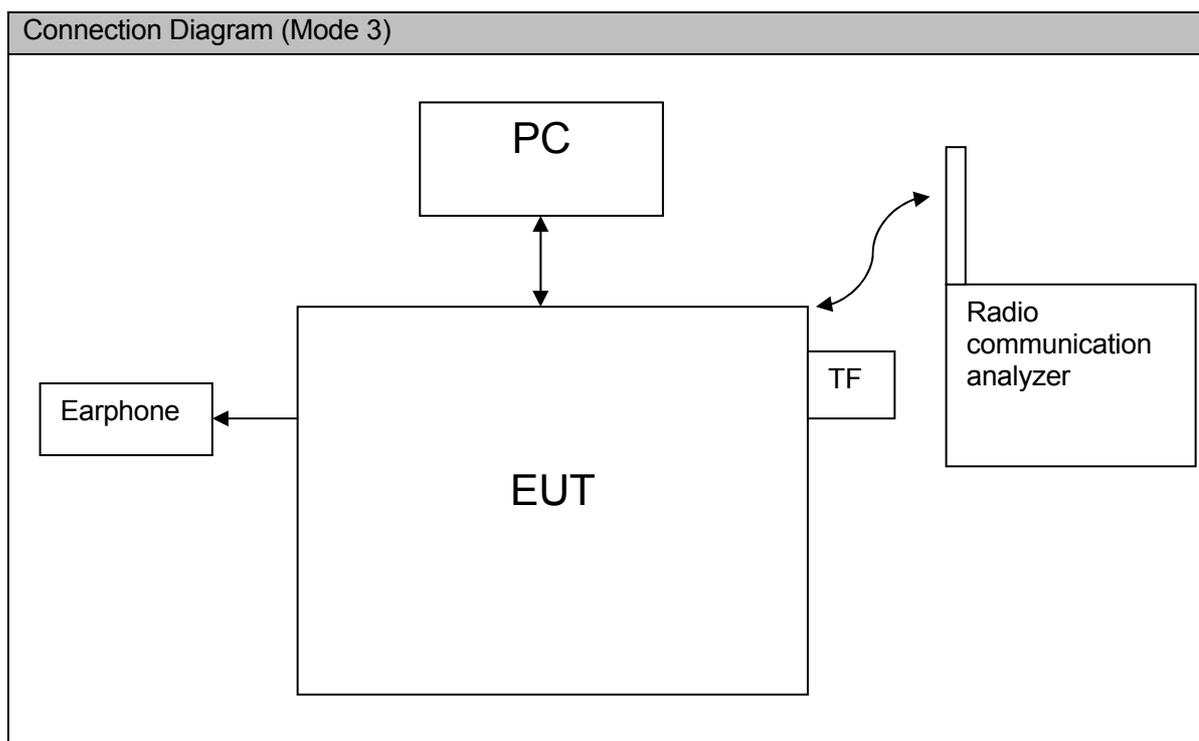

3.3 Cables Used during Test

Cable	Quantity	Length	Type of Cable
USB	1	<3m	shielded
Earphone	1	<3m	unshielded

3.4 Associated Equipment Used during Test

Name	Model	Manufacturer	S/N	Calibrated dateline	Cal interval (month)
Radio Communication Tester	CMU200	R&S	112347	2013-5-10	12
Notebook	X200	Lenovo	3108052581	/	/
SD Card	2G	Kingdon	1040RE5672k	/	/

4 Electromagnetic Interference (EMI)

4.1 Radiated Disturbance 30MHz to 18GHz

4.1.1 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4-2009. The test distance was 3m. The set-up and test methods were according to ANSI C63.4-2009.

A preliminary scan and a final scan of the emissions were made from 30 MHz to 18 GHz by using test script of software; The emissions were measured using Quasi-Peak Detector (30MHz~1GHz) and AV/PK detector (above 1GHz). The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m. The azimuth range of turntable was 0° to 360°. The receiving antenna has two polarizations V and H.

Measurement bandwidth (RBW) for 30MHz to 1000 MHz: 120 kHz;

Measurement bandwidth (RBW) for 1000MHz to 18000 MHz: 1MHz;

EUT was configured in idle mode and the test performed at worst emission state.

4.1.2 Test setup

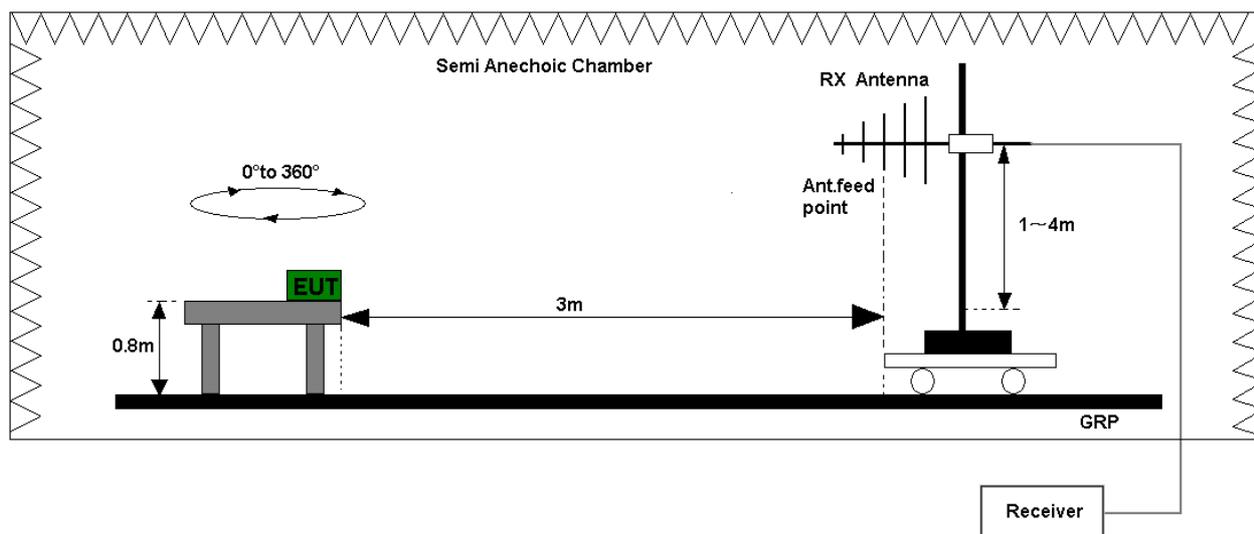


Figure 1. Test set-up of radiated disturbance(30MHz-1GHz)

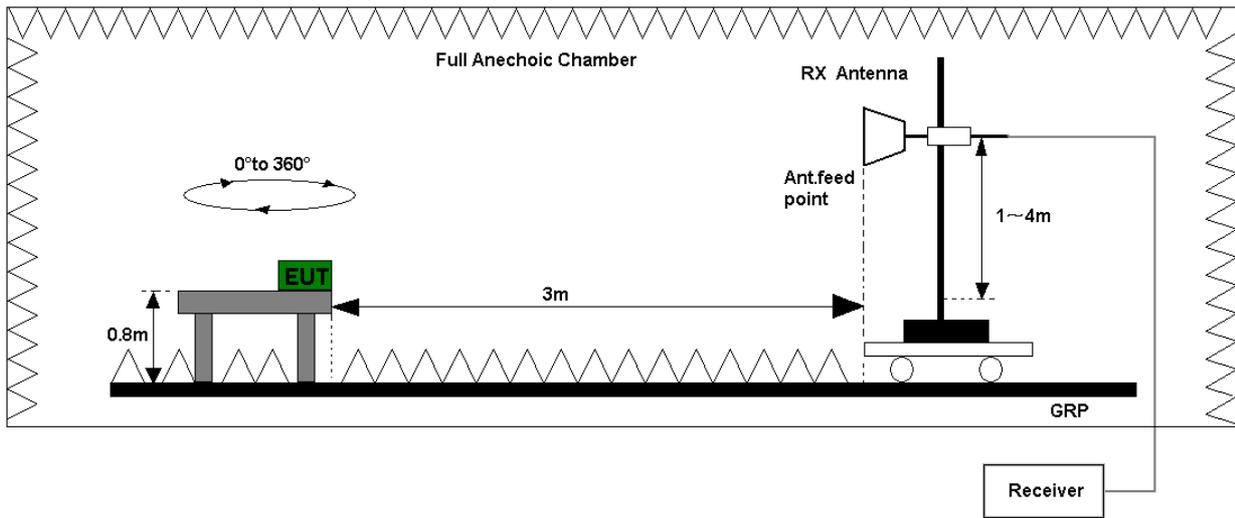


Figure 2. Test set-up of radiated disturbance(above 1GHz)

4.1.3 Test Results

The EUT has met the requirements for Radiated Emission of enclosure port.
Refer to the section 7.1 of this report for test data.

Test Limits (Class B)				
Frequency of Emission (MHz)	Radiated Limit			
	Unit(μ V/m)		Unit(dB μ V/m)	
30-88	100		40	
88-216	150		43.5	
216-960	200		46	
Above 960	500		54	
Above 1000	AV	PK	AV	PK
	500	5000	54	74

4.2 Conducted Disturbance 0.15 MHz to 30MHz

4.2.1 Test Procedure

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm away from LISN. The set-up and test methods were according to ANSI C63.4-2009. Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector. EUT was communicated with the simulator through Air interface, the simulator controls the EUT to transmitter the maximum power which defined in specification of product. The EUT operated on the typical channel.

Measurement bandwidth (RBW) for 150 kHz to 30 MHz: 9 kHz;

The EUT was set in the shielded chamber and operated under nominal conditions.

4.2.2 Test Setup

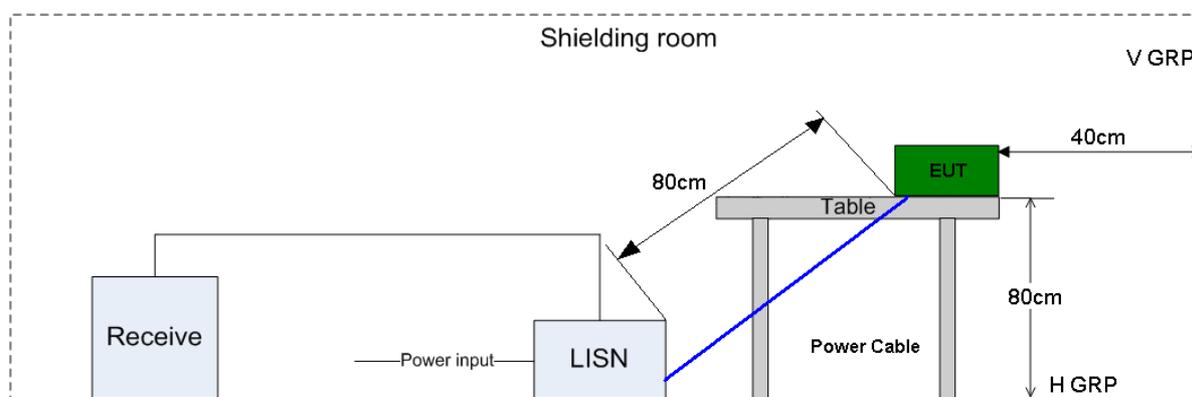


Figure 3. Test Set-up of conducted disturbance

4.2.3 Test Results

The EUT has met requirements for Conducted disturbance of power lines.

Refer to the section 7 of this report for test data.

Test Limit of AC Power Port		
Frequency range	150kHz ~ 30MHz	
Frequency	Voltage limits	
	QP (dB μ V)	AV (dB μ V)
0.15MHz~0.5MHz	66-56	56-46
0.5MHz-5MHz	56	46
5MHz~30MHz	60	50

5 Main Test Instruments

Main Test Equipments						
Test item	Test Instrument	Model	S/N	Manufacturer	Calibrated Deadline	Cal interval
RE	EMI Test receiver	ESU26	100150	R&S	May.27, 2013	12
	Broadband Antenna	VULB 9163	9163-941	SCHWARZB ECK	Jul.07, 2013	24
	Horn Antenna	HF906	100683	R&S	May.15, 2013	24
CE	EMI Test receiver	ESCI	101163	R&S	Jan.28, 2014	12
	Artificial Mains Network	ENV216	100382	R&S	Jan.28, 2014	12
Software Information						
Test Item	Software Name	Manufacturer		Version		
RE	EMC32	R&S		V8.50.10		
CE	EMC32	R&S		V8.52.0		

6 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:


System Measurement Uncertainty		
	Items	Extended Uncertainty
RE(30MHz-1GHz)	Field strength (dB μ V/m)	U=4.2dB; k=2
RE(1GHz-18GHz)	Field strength (dB μ V/m)	U=5.3dB; k=2
CE	Disturbance Voltage (dB μ V)	U=2.6dB; k=2

7 Test Data and Graph

Only the worst test results were shown

7.1 Radiated Disturbance

7.1.1 30MHz~1GHz

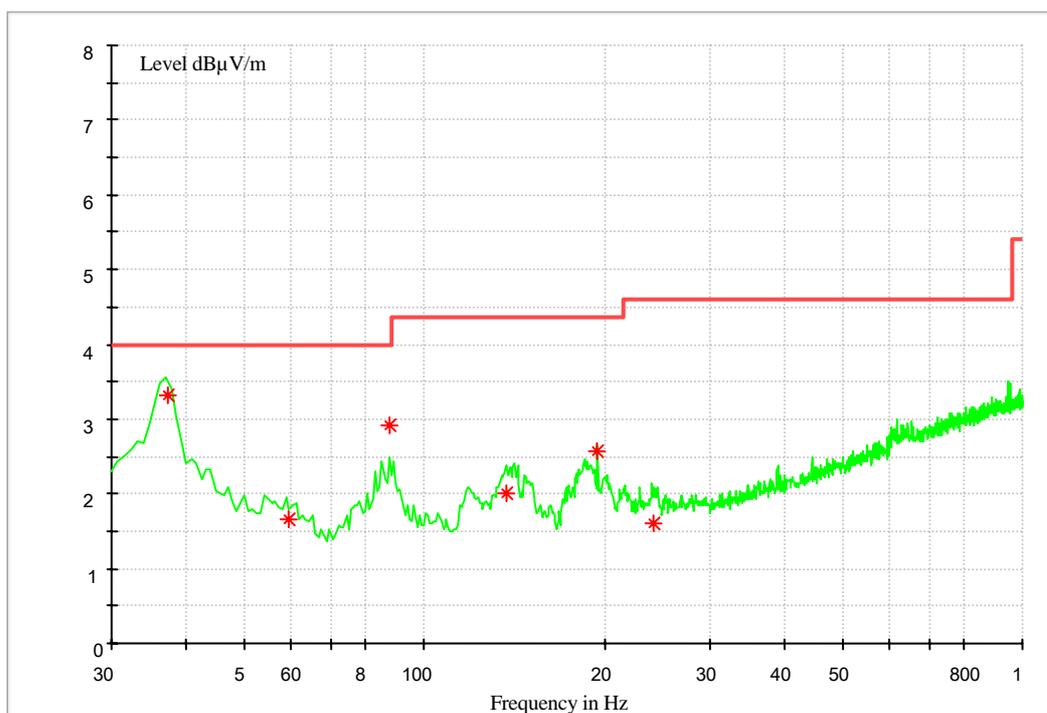

MEASUREMENT RESULT: QP Detector


Frequency MHz	Level dBμV/m	Transducer dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
37.166400	33.1	12.6	40.0	6.9	100.0	180.0	VERTICAL
59.228480	16.7	12.6	40.0	23.3	100.0	186.0	VERTICAL
87.800320	29.2	11.3	40.0	10.8	212.0	104.0	HORIZONTAL
137.441280	20.2	9.3	43.5	23.3	100.0	91.0	VERTICAL
195.001920	25.8	12.1	43.5	17.7	154.0	136.0	HORIZONTAL
242.193920	16.1	14.3	46.0	29.9	138.0	314.0	HORIZONTAL

Note:

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is used to calculate by software which is not shown in the sheet.

7.1.2 1GHz~6GHz

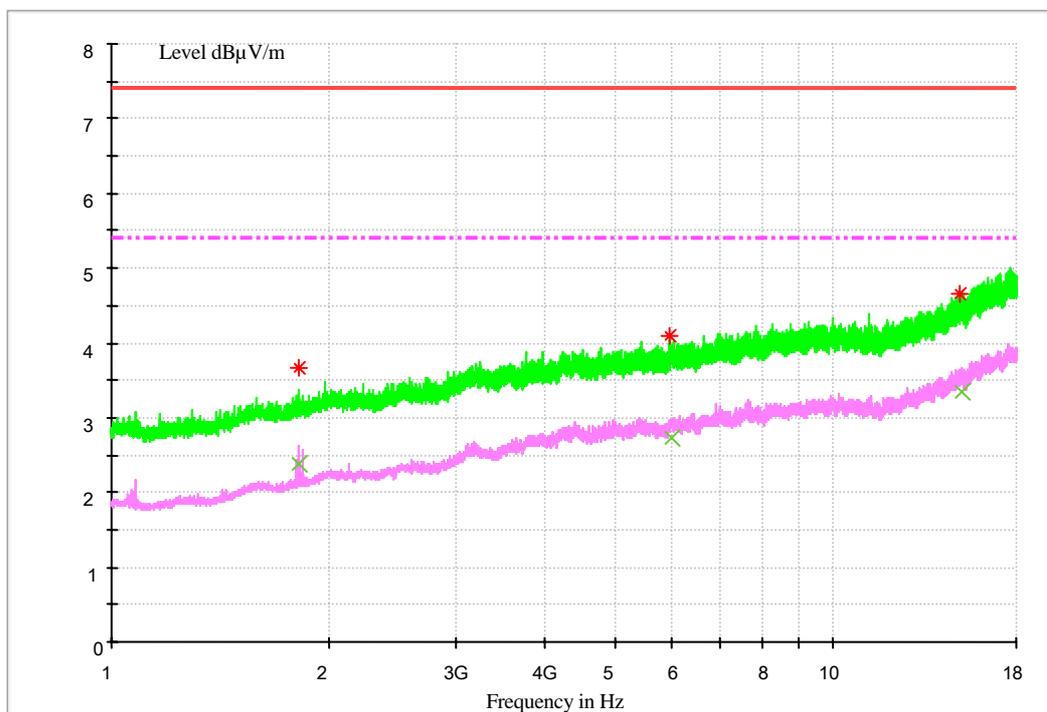

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transducer dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
1824.932000	36.7	-10.7	74.0	37.3	100.0	45.0	VERTICAL
5956.015333	41.0	2.2	74.0	33.0	114.0	178.0	VERTICAL
15050.613333	46.6	19.4	74.0	27.4	114.0	-45.0	HORIZONTAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV/m	Transducer dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
1824.669333	23.7	-10.7	54.0	30.3	100.0	0.0	VERTICAL
5975.183333	27.2	2.2	54.0	26.8	100.0	178.0	HORIZONTAL
15086.296666	33.4	19.5	54.0	20.6	100.0	146.0	HORIZONTAL


Note:

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is used to calculate by software which is not shown in the sheet.

7.2 Conducted Disturbance

7.2.1 AC Port Test Data

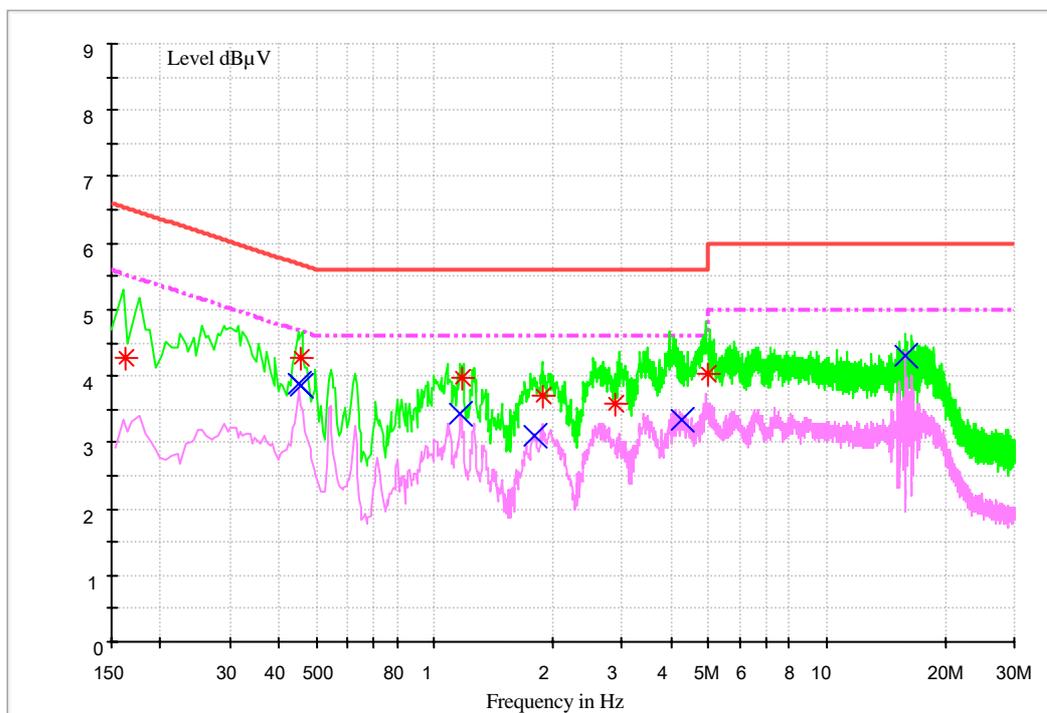

MEASUREMENT RESULT: QP Detector

Frequency	Level	Transducer	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.163702	42.6	9.7	65.3	22.7	L1	FLO
0.458512	42.7	9.7	56.7	14.0	N	FLO
1.167942	39.6	9.7	56.0	16.4	L1	FLO
1.889854	37.0	9.7	56.0	19.0	L1	FLO
2.889942	35.8	9.7	56.0	20.2	N	FLO
4.964142	40.2	9.8	56.0	15.8	L1	FLO

MEASUREMENT RESULT: AV Detector

Frequency	Level	Transducer	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.450750	38.8	9.7	46.9	8.1	L1	FLO
0.453806	38.5	9.7	46.8	8.3	L1	FLO
1.166880	34.3	9.7	46.0	11.7	L1	FLO
1.802194	31.1	9.7	46.0	14.9	L1	FLO
4.260708	33.6	9.8	46.0	12.4	L1	FLO
15.860865	43.1	10.0	50.0	6.9	L1	FLO

Note:

Level= Reading level+ Transd (cable loss + correction factor)

The reading level is used to calculate by software which is not shown in the sheet.

-----END-----