

FCC Radio Test Report

FCC ID: QISS8-302L

This report concerns (check one): Original Grant Class II Change

Project No. : 1406C083
Equipment : HUAWEI MediaPad M1 8.0
Model Name : S8-302L
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of
Huawei Technologies Co., Ltd., Bantian,
Longgang District Shenzhen China

Tested by: BTL Inc. EMC Laboratory
Date of Receipt: Jun. 12, 2014
Date of Test: Jun. 12, 2014 ~ Jun. 18, 2014
Issued Date: Jun. 19, 2014

Testing Engineer : David Mao
(David Mao)

Technical Manager : Leo Hung
(Leo Hung)

Authorized Signatory : Steven Lu
(Steven Lu)

BTL INC.

No.3, Jinshagang 1st Road, Shixia,
Dalang Town, Dongguan, China.
TEL: 0769-8318-3000 FAX: 0769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	14
4 . EMC EMISSION TEST	15
4.1 CONDUCTED EMISSION MEASUREMENT	15
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	15
4.1.2 TEST PROCEDURE	15
4.1.3 DEVIATION FROM TEST STANDARD	15
4.1.4 TEST SETUP	16
4.1.5 EUT OPERATING CONDITIONS	16
4.1.6 EUT TEST CONDITIONS	16
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 TEST PROCEDURE	18
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	19
4.2.5 EUT OPERATING CONDITIONS	20
4.2.6 EUT TEST CONDITIONS	20
4.2.7 TEST RESULTS (9K TO 30MHZ)	20
4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHZ)	20
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	21
5 . BANDWIDTH TEST	22
5.1 APPLIED PROCEDURES	22
5.1.1 TEST PROCEDURE	22
5.1.2 DEVIATION FROM STANDARD	22
5.1.3 TEST SETUP	22
5.1.4 EUT OPERATION CONDITIONS	22
5.1.5 EUT TEST CONDITIONS	22
5.1.6 TEST RESULTS	22

Table of Contents	Page
6 . MAXIMUM OUTPUT POWER TEST	23
6.1 APPLIED PROCEDURES / LIMIT	23
6.1.1 TEST PROCEDURE	23
6.1.2 DEVIATION FROM STANDARD	23
6.1.3 TEST SETUP	23
6.1.4 EUT OPERATION CONDITIONS	23
6.1.5 EUT TEST CONDITIONS	23
6.1.6 TEST RESULTS	23
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	24
7.1 APPLIED PROCEDURES / LIMIT	24
7.1.1 TEST PROCEDURE	24
7.1.2 DEVIATION FROM STANDARD	24
7.1.3 TEST SETUP	24
7.1.4 EUT OPERATION CONDITIONS	24
7.1.5 EUT TEST CONDITIONS	24
7.1.6 TEST RESULTS	24
8 . POWER SPECTRAL DENSITY TEST	25
8.1 APPLIED PROCEDURES / LIMIT	25
8.1.1 TEST PROCEDURE	25
8.1.2 DEVIATION FROM STANDARD	25
8.1.3 TEST SETUP	25
8.1.4 EUT OPERATION CONDITIONS	25
8.1.5 EUT TEST CONDITIONS	25
8.1.6 TEST RESULTS	25
9 . MEASUREMENT INSTRUMENTS LIST	26
10 . EUT TEST PHOTO	28
ATTACHMENT A - CONDUCTED EMISSION	32
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	35
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	37
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	44
ATTACHMENT E - BANDWIDTH	69
ATTACHMENT F - MAXIMUM OUTPUT POWER	74
ATTACHMENT G – ANTENNA CONDUCTED SPURIOUS EMISSION	76
ATTACHMENT H – POWER SPECTRAL DENSITY	87



REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
NEI-FCCP-2-1406C083	Original Issue.	Jun. 19, 2014

1. CERTIFICATION

Equipment : HUAWEI MediaPad M1 8.0
Brand Name : HUAWEI
Model Name : S8-302L
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen
518129, P.R.China
Factory : Huawei Technologies Co.,Ltd.
Address : Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R.China
Date of Test : Jun. 12, 2014 ~ Jun. 18, 2014
Test Item : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart C(15.247) / ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-2-1406C083) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the 5745~5825MHz Mode part of the product.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C				
Standard(s)	Section	Test Item	Judgment	Remark
	FCC			
15.207		Conducted Emission	PASS	
15.247(d)		Antenna conducted Spurious Emission	PASS	
15.247(a)(2)		6dB Bandwidth	PASS	
15.247(b)(3)		Peak Output Power	PASS	
15.247(e)		Power Spectral Density	PASS	
15.203		Antenna Requirement	PASS	
15.209/15.205		Transmitter Radiated Emissions	PASS	

NOTE:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r01 (Measurement Guidelines of DTS)

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792
BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
DG-CB03	CISPR	9KHz~30MHz	V	3.79	
		9KHz~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MediaPad M1 8.0	
Brand Name	HUAWEI	
Model Name	S8-302L	
Model Difference	N/A	
Product Description	Operation Frequency	5745~5825 MHz
	Modulation Technology	802.11a/n:OFDM
	Bit Rate of Transmitter	11a:6/ 9/12/18/24/36/48/54Mbps 11n:up to 150Mbps
	Output Power (Max.)	802.11a: 20.51 dBm 802.11n(20 MHz): 19.97 dBm
Power Source	# 1 DC voltage supplied from adapter. Brand/ Model: HUAWEI / HW-050200E3W #2 Supplied from USB Port. #3 Supplied from Li-Polymer Battery. Brand/Model:HUAWEI/ HB3080G1EBC	
Power Rating	#1 I/P:AC 100-240VAC 50/60Hz 0.5A MAX DC 5V 2A #2 DC 5V #3 DC 3.8V 4650mAh/17.7Wh	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

802.11a / 802.11n(20 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785
161	5805	165	5825		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	SkyCross.inc, Shanghai. Branch	N/A	Monopole Antenna	N/A	2.55	TX/RX

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX 802.11a Mode Channel 149/157/165
Mode 2	TX 802.11n(20 MHz) Mode Channel 149/157/165
Mode 3	TX MODE

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 3	TX MODE

For Radiated Test	
Final Test Mode	Description
Mode 1	TX 802.11a Mode Channel 149/157/165
Mode 2	TX 802.11n(20 MHz) Mode Channel 149/157/165

Note:


(1) For radiated below 1G test, the 802.11a is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	WIFI_Test_tool		
Frequency	5745 MHz	5785 MHz	5825 MHz
802.11a	13	13	13
802.11n(20 MHz)	13	13	13

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

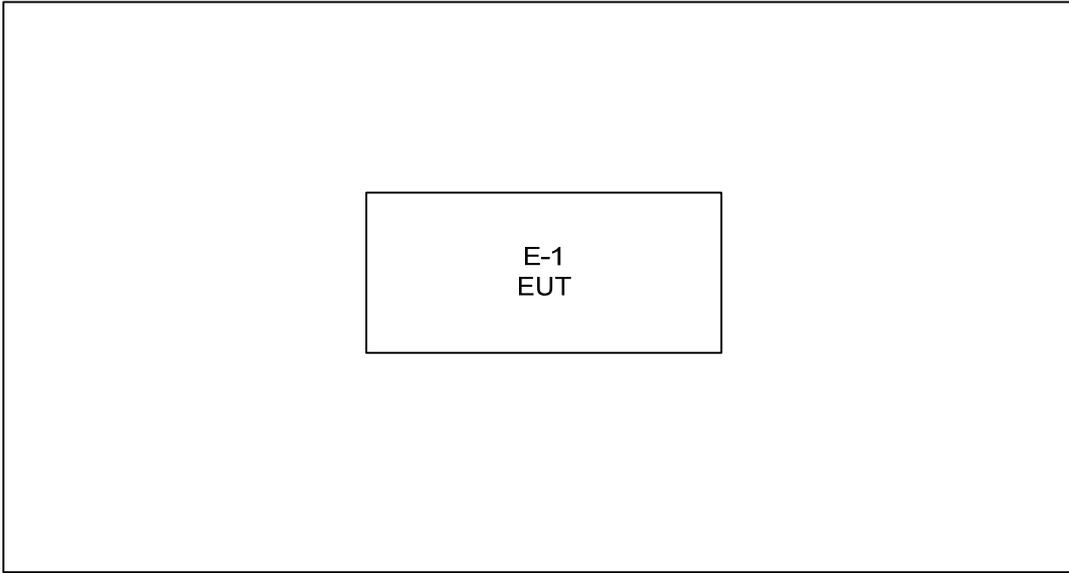

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
-	-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

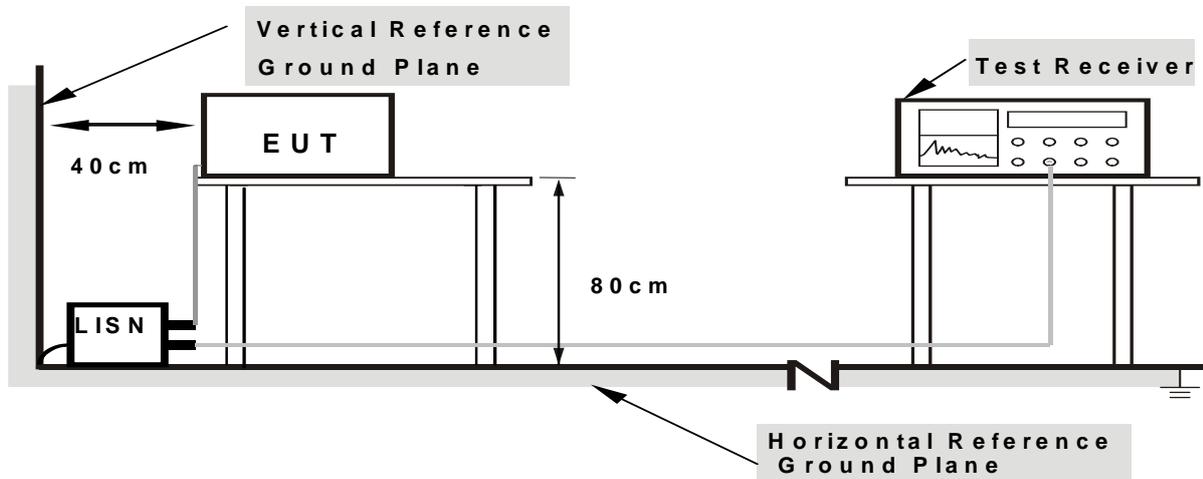

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 'Note'. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz-1000MHz)

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

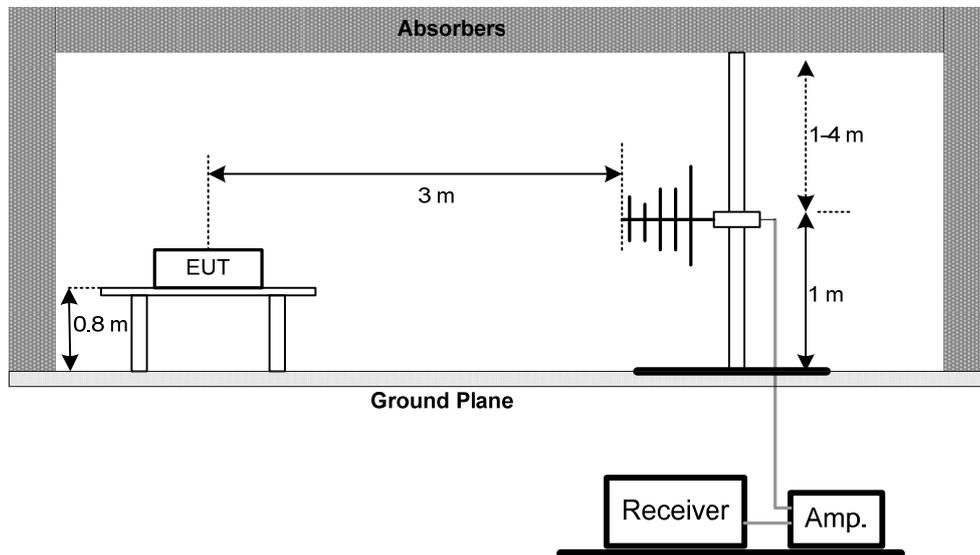

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

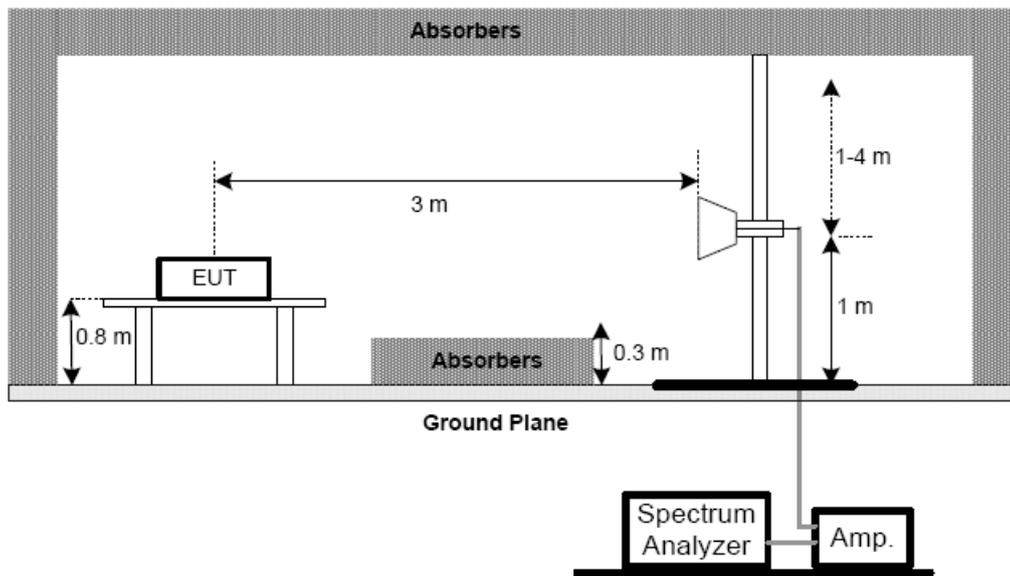

(C) For radiated emissions below 30MHz

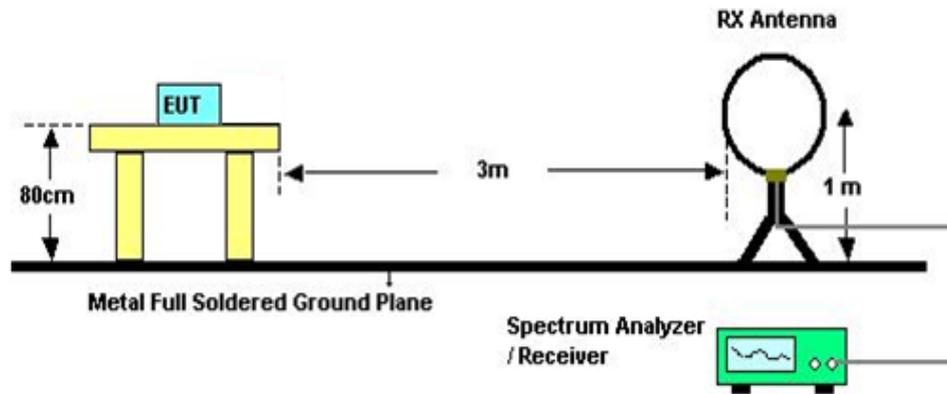

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9K TO 30MHZ)

Please refer to the Attachment B

4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHZ)

Please refer to the Attachment C

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note 』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (5) EUT Orthogonal Axis:
"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand
- (6) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

5. BANDWIDTH TEST

5.1 Applied procedures

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	5725 - 5825	PASS

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM OUTPUT POWER TEST

6.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	5725 - 5825	PASS


6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with method 9.1.3 of FCC KDB 558074 D01 DTS Meas Guidance v03r01.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

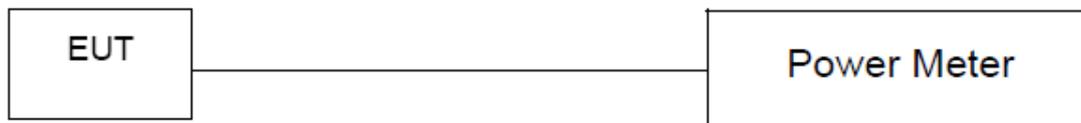

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing. Transmit output power was measured while the host equipment supply voltage was varied from 85 % to 115 % of the nominal rated supply voltage. No change in transmit output power was observed.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 Applied procedures / limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	5745 - 5825	PASS

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Mar. 29, 2015
2	LISN	R&S	ENV216	101447	Mar. 29, 2015
3	Test Cable	N/A	C_17	N/A	Mar. 14, 2015
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Mar. 29, 2015
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 29, 2015

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 29, 2015
2	Amplifier	HP	8447D	2944A09673	Mar. 29, 2015
3	Receiver	AGILENT	N9038A	MY52130039	Aug. 24, 2014
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 02, 2014
5	Antenna	ETS	3115	00075789	Mar. 29, 2015
6	Amplifier	Agilent	8449B	3008A02274	Mar. 29, 2015
7	Receiver	AGILENT	N9038A	MY52130039	Aug. 24, 2014
8	Test Cable	HUBER+SUHNER	C-48	N/A	Apr. 30, 2015
9	Controller	CT	SC100	N/A	N/A
10	Horn Antenna	EMCO	3115	9605-4803	Mar. 29, 2015
11	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Feb. 22, 2015
12	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Mar. 29, 2015

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	P-series Power meter	Agilent	N1911A	MY45100473	Apr. 25, 2014
2	Wireband Power sensor	Agilent	N1921A	MY51100041	Apr. 25, 2014

Antenna Conducted Spurious Emission Measurement

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Power Spectral Density Measurement

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Mode : TX Mode

Line



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	35.08	9.52	44.60	66.00	-21.40	peak	
2		0.1970	30.93	9.54	40.47	63.74	-23.27	peak	
3		0.5680	32.26	9.68	41.94	56.00	-14.06	peak	
4		2.5797	27.12	9.74	36.86	56.00	-19.14	peak	
5	*	3.4453	33.04	9.79	42.83	56.00	-13.17	peak	
6		15.9610	27.05	10.27	37.32	60.00	-22.68	peak	

Test Mode : TX Mode

Neutral



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	35.20	9.63	44.83	66.00	-21.17	peak	
2		0.1970	31.34	9.61	40.95	63.74	-22.79	peak	
3		0.5602	30.83	9.65	40.48	56.00	-15.52	peak	
4		2.6930	28.87	9.77	38.64	56.00	-17.36	peak	
5	*	3.4492	32.64	9.81	42.45	56.00	-13.55	peak	
6		16.6290	26.34	10.33	36.67	60.00	-23.33	peak	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode : TX Mode 5745MHz

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0213	0°	16.52	24.22	40.74	121.04	-80.30	AV
0.0213	0°	18.19	24.22	42.41	141.04	-98.63	PK
0.0279	0°	17.15	23.80	40.95	118.69	-77.74	AV
0.0279	0°	19.03	23.80	42.83	138.69	-95.86	PK
0.0331	0°	17.16	23.47	40.63	117.21	-76.58	AV
0.0331	0°	20.08	23.47	43.55	137.21	-93.66	PK
0.0528	0°	18.47	22.34	40.81	113.15	-72.34	AV
0.0528	0°	21.55	22.34	43.89	133.15	-89.26	PK
0.3170	0°	18.36	20.24	38.60	97.58	-58.98	AV
0.3170	0°	21.05	20.24	41.29	117.58	-76.29	PK
1.5250	0°	18.73	19.55	38.28	63.94	-25.66	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0175	90°	17.51	24.30	41.81	122.74	-80.93	AVG
0.0175	90°	19.23	24.30	43.53	142.74	-99.21	PK
0.0269	90°	16.95	23.86	40.81	119.01	-78.20	AVG
0.0269	90°	18.33	23.86	42.19	139.01	-96.82	PK
0.0378	90°	20.03	23.17	43.20	116.05	-72.85	AVG
0.0378	90°	21.68	23.17	44.85	136.05	-91.20	PK
0.0519	90°	20.25	22.36	42.61	113.30	-70.69	AVG
0.0519	90°	23.39	22.36	45.75	133.30	-87.55	PK
0.3270	90°	18.45	20.22	38.67	97.31	-58.65	AVG
0.3270	90°	20.72	20.22	40.94	117.31	-76.38	PK
1.6750	90°	18.63	19.53	38.16	63.12	-24.96	QP


Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: TX 802.11a Mode 5745MHz


Vertical

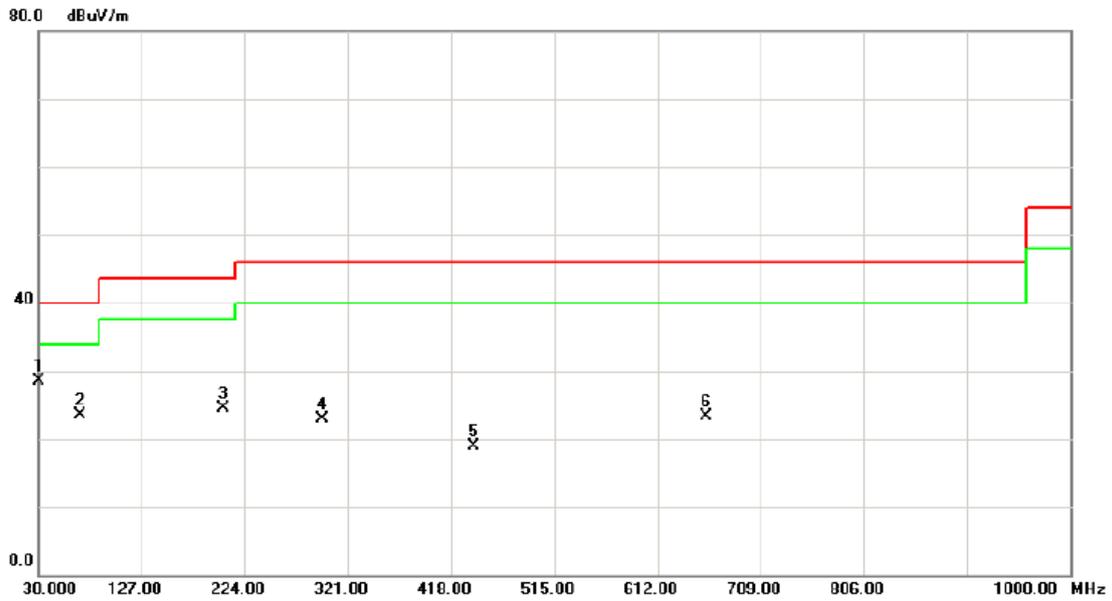

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	30.0000	44.20	-15.79	28.41	40.00	-11.59	peak	
2		68.8000	39.82	-16.23	23.59	40.00	-16.41	peak	
3		203.6300	39.81	-15.24	24.57	43.50	-18.93	peak	
4		296.7500	33.99	-11.11	22.88	46.00	-23.12	peak	
5		439.3400	27.85	-8.89	18.96	46.00	-27.04	peak	
6		657.5900	28.41	-5.15	23.26	46.00	-22.74	peak	

Test Mode: TX 802.11a Mode 5745MHz


Horizontal

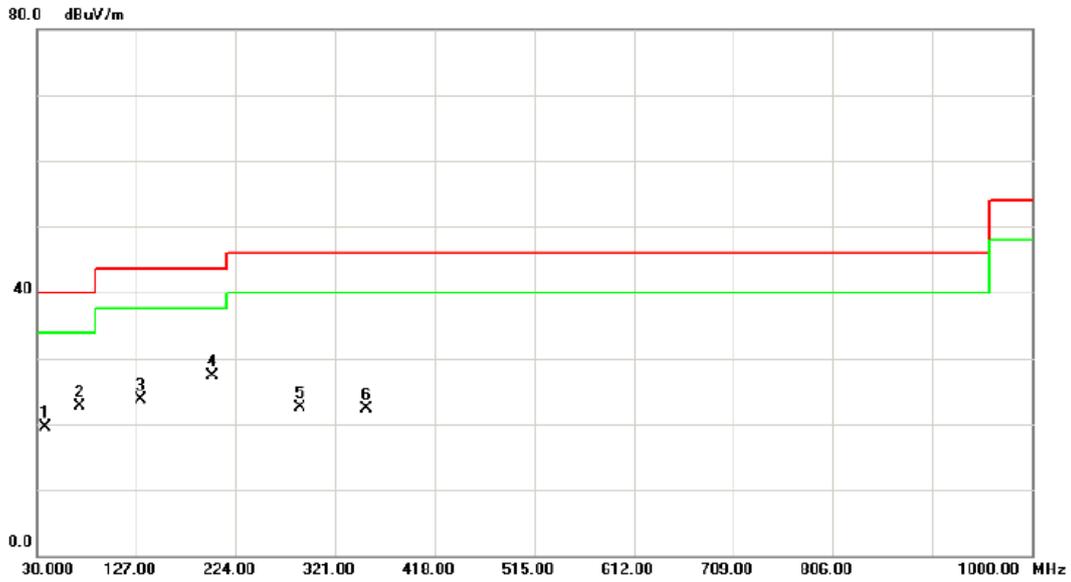

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		38.7300	33.88	-14.46	19.42	40.00	-20.58	peak	
2		71.7100	39.28	-16.53	22.75	40.00	-17.25	peak	
3		131.8500	36.98	-13.24	23.74	43.50	-19.76	peak	
4	*	200.7200	42.38	-15.17	27.21	43.50	-16.29	peak	
5		287.0500	34.07	-11.58	22.49	46.00	-23.51	peak	
6		351.0700	33.99	-11.77	22.22	46.00	-23.78	peak	

Test Mode: TX 802.11a Mode 5785MHz


Vertical

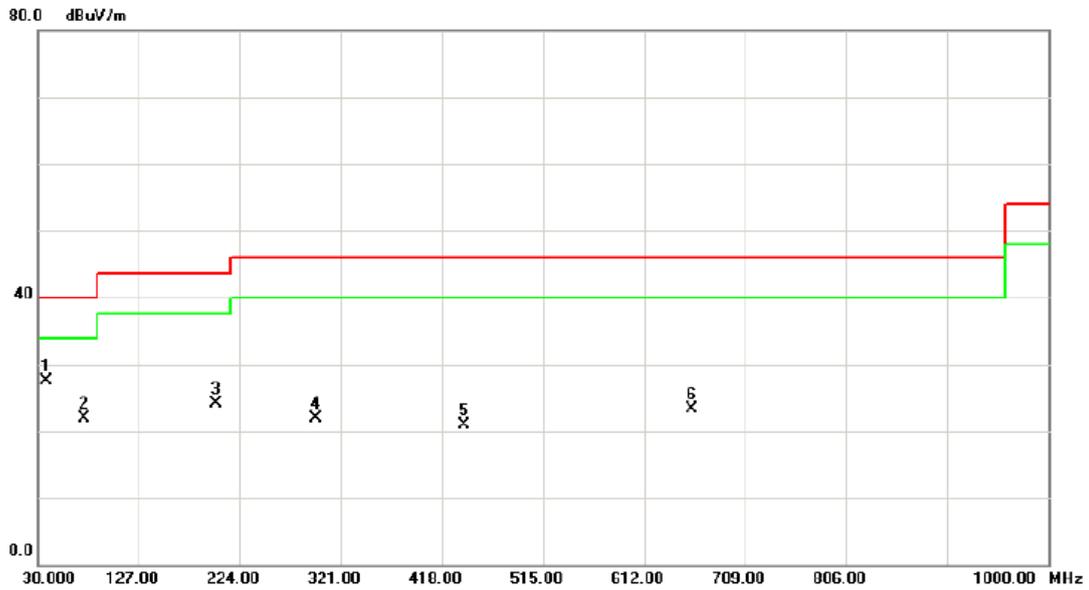

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	37.7600	42.05	-14.53	27.52	40.00	-12.48	peak	
2		74.6200	38.66	-16.74	21.92	40.00	-18.08	peak	
3		200.7200	39.37	-15.17	24.20	43.50	-19.30	peak	
4		296.7500	32.99	-11.11	21.88	46.00	-24.12	peak	
5		439.3400	29.85	-8.89	20.96	46.00	-25.04	peak	
6		657.5900	28.41	-5.15	23.26	46.00	-22.74	peak	


Test Mode: TX 802.11a Mode 5785MHz

Horizontal

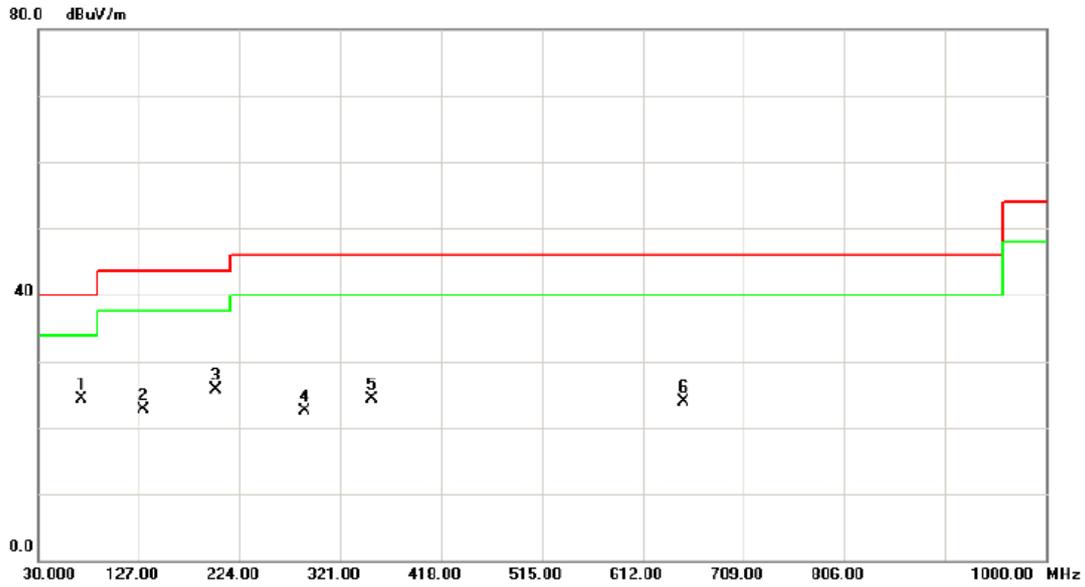

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	71.7100	40.78	-16.53	24.25	40.00	-15.75	peak	
2		131.8500	35.98	-13.24	22.74	43.50	-20.76	peak	
3		200.7200	40.88	-15.17	25.71	43.50	-17.79	peak	
4		287.0500	34.07	-11.58	22.49	46.00	-23.51	peak	
5		351.0700	35.99	-11.77	24.22	46.00	-21.78	peak	
6		650.8000	29.09	-5.19	23.90	46.00	-22.10	peak	

Test Mode: TX 802.11a Mode 5825MHz

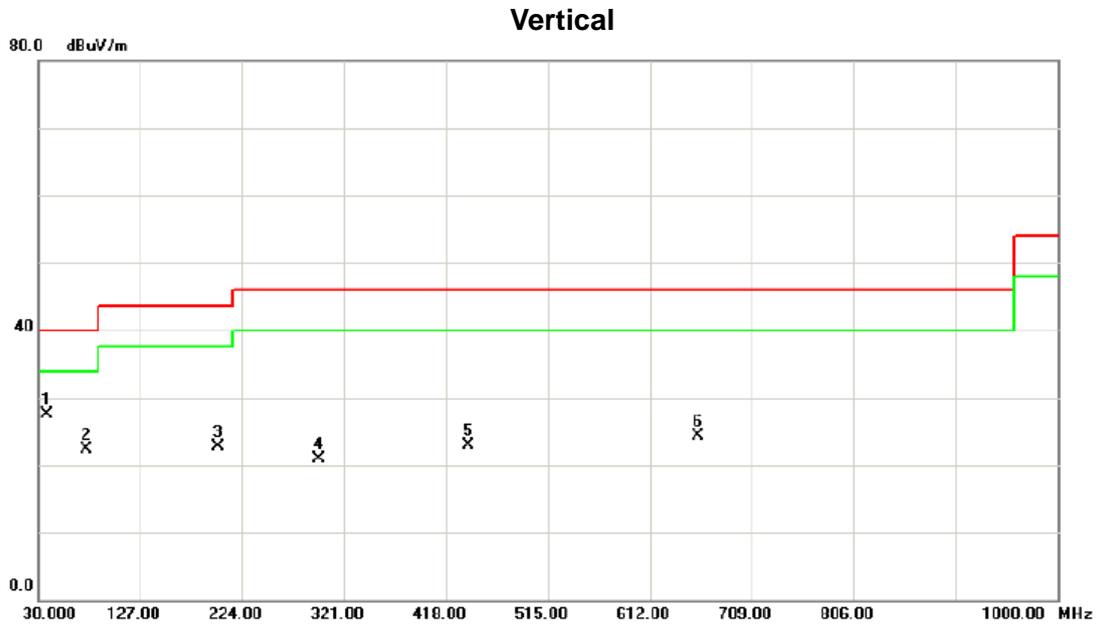

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	37.7600	42.05	-14.53	27.52	40.00	-12.48	peak	
2		75.5900	39.09	-16.84	22.25	40.00	-17.75	peak	
3		200.7200	37.87	-15.17	22.70	43.50	-20.80	peak	
4		296.7500	31.99	-11.11	20.88	46.00	-25.12	peak	
5		439.3400	31.85	-8.89	22.96	46.00	-23.04	peak	
6		657.5900	29.41	-5.15	24.26	46.00	-21.74	peak	

Test Mode: TX 802.11a Mode 5825MHz


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	71.7100	39.28	-16.53	22.75	40.00	-17.25	peak	
2		131.8500	36.48	-13.24	23.24	43.50	-20.26	peak	
3		200.7200	39.38	-15.17	24.21	43.50	-19.29	peak	
4		351.0700	34.99	-11.77	23.22	46.00	-22.78	peak	
5		383.0800	33.43	-10.39	23.04	46.00	-22.96	peak	
6		650.8000	28.59	-5.19	23.40	46.00	-22.60	peak	


ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis :	X
Test Mode :	TX 802.11a Mode 5745MHz

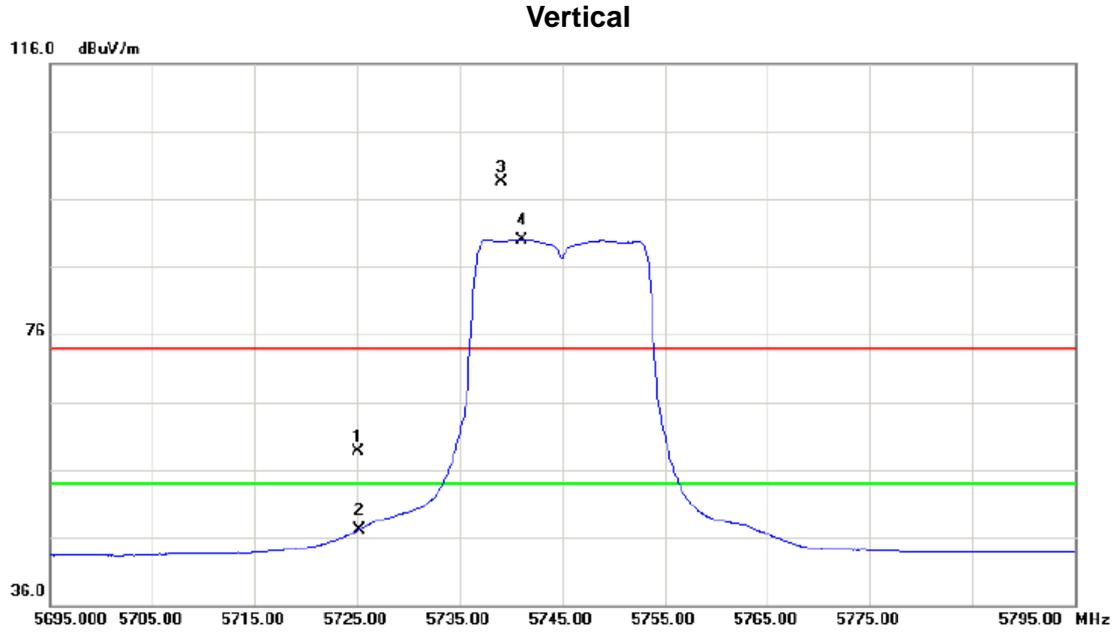

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5725.000	14.14	44.58	58.72	74.00	-15.28	peak	
2		5725.000	2.51	44.58	47.09	54.00	-6.91	AVG	
3	X	5739.000	53.85	44.65	98.50	74.00	24.50	peak	
4	*	5741.100	45.29	44.66	89.95	54.00	35.95	AVG	


Orthogonal Axis :	X
Test Mode :	TX 802.11a Mode 5745MHz

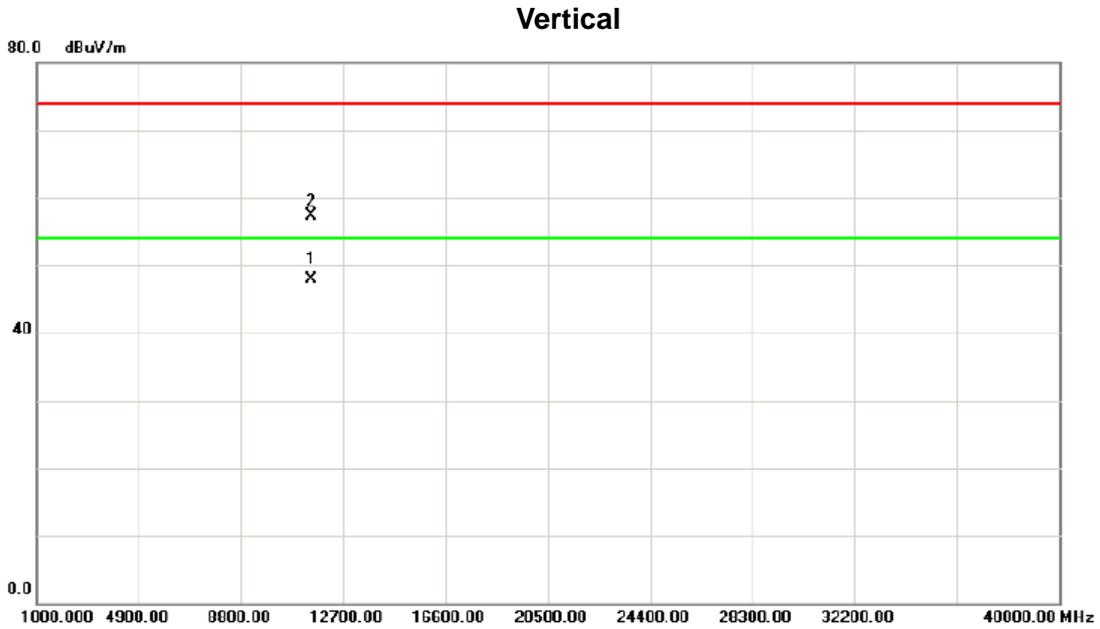

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11488.13	29.44	18.47	47.91	54.00	-6.09	AVG	
2		11489.24	38.92	18.47	57.39	74.00	-16.61	peak	

Orthogonal Axis :	X
Test Mode :	TX 802.11a Mode 5745MHz


Horizontal

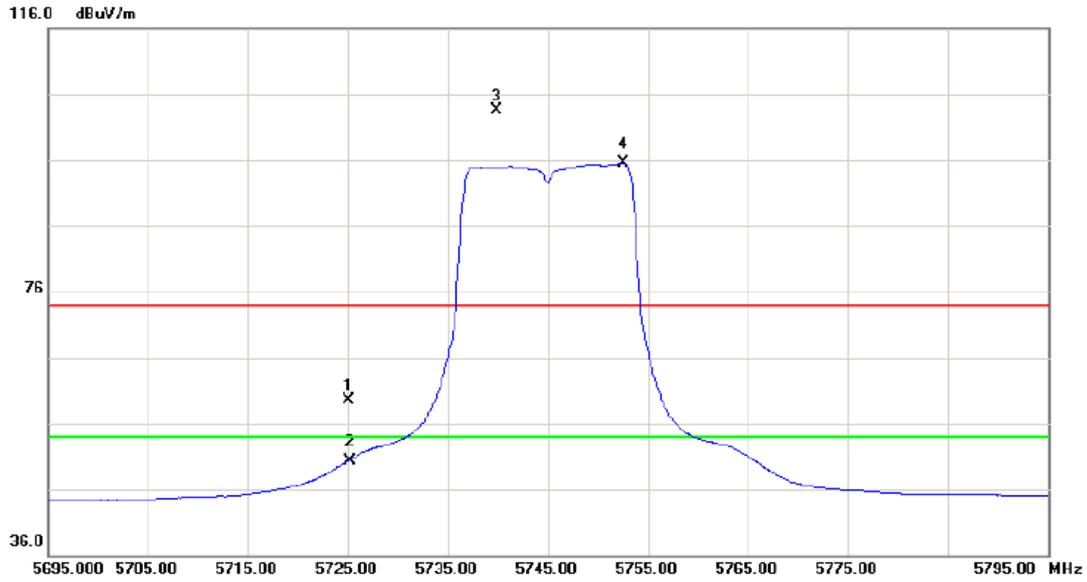

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5725.000	14.92	44.58	59.50	74.00	-14.50	peak	
2		5725.000	5.80	44.58	50.38	54.00	-3.62	AVG	
3	X	5739.800	58.85	44.66	103.51	74.00	29.51	peak	
4	*	5752.500	50.86	44.72	95.58	54.00	41.58	AVG	

Orthogonal Axis :	X
Test Mode :	TX 802.11a Mode 5745MHz


Horizontal

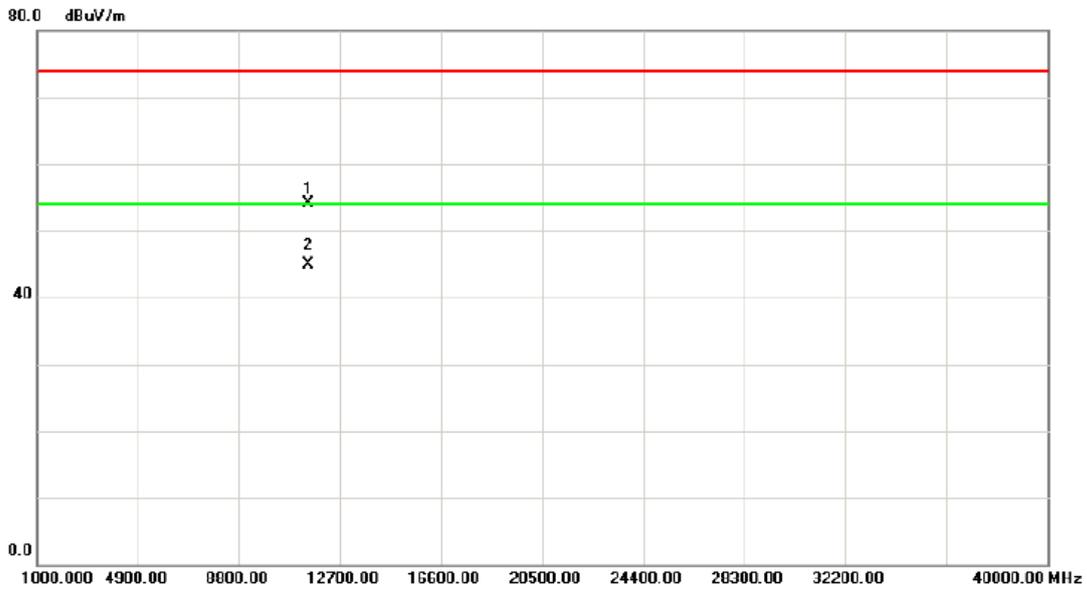

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.25	35.69	18.47	54.16	74.00	-19.84	peak	
2	*	11490.27	26.42	18.47	44.89	54.00	-9.11	AVG	

Orthogonal Axis :	X
Test Mode :	TX 802.11a Mode 5785MHz


Vertical

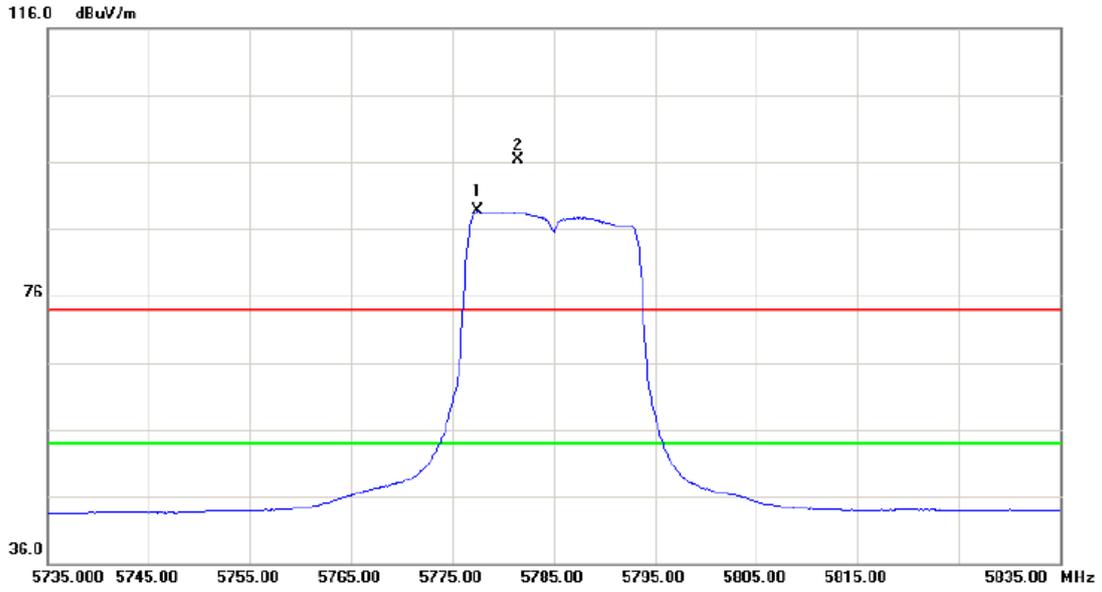

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5777.400	43.80	44.85	88.65	54.00	34.65	AVG	
2	X	5781.500	51.53	44.87	96.40	74.00	22.40	peak	

Orthogonal Axis :	X
Test Mode :	TX 802.11a Mode 5785MHz


Vertical

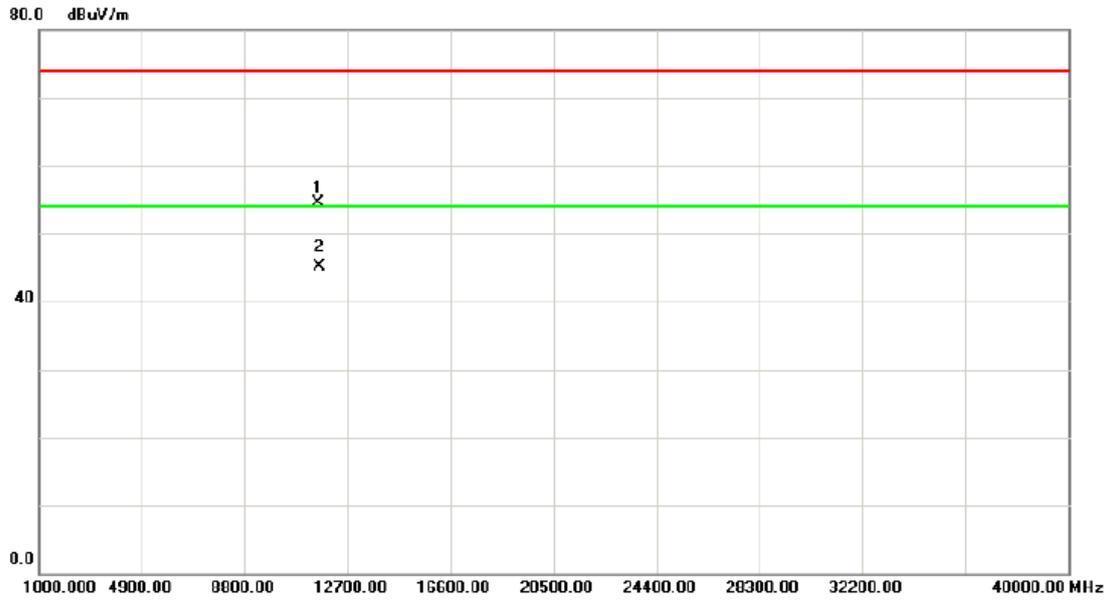

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.78	35.79	18.67	54.46	74.00	-19.54	peak	
2	*	11570.78	26.52	18.67	45.19	54.00	-8.81	AVG	

Orthogonal Axis :	X
Test Mode :	TX 802.11a Mode 5785MHz


Horizontal

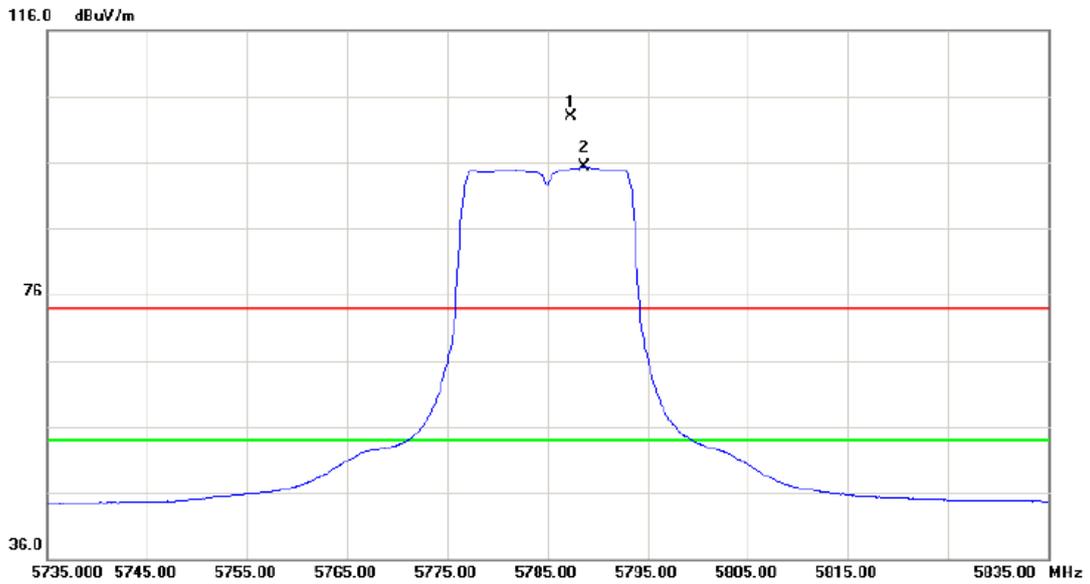

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5787.300	57.96	44.90	102.86	74.00	28.86	peak	
2	*	5788.600	50.34	44.91	95.25	54.00	41.25	AVG	


Orthogonal Axis :	X
Test Mode :	TX 802.11a Mode 5785MHz

Horizontal

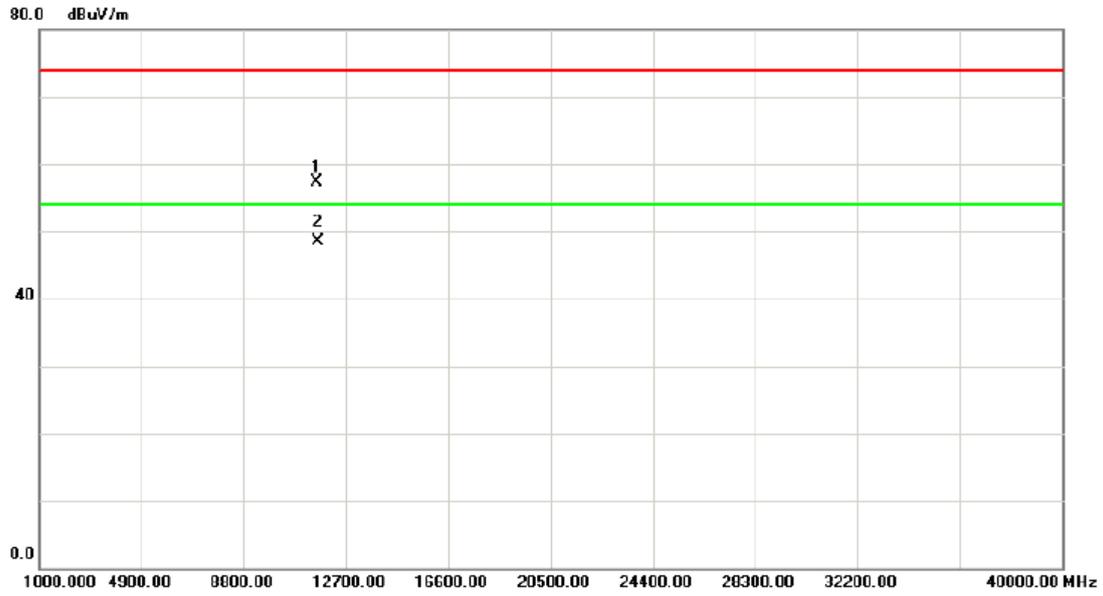


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11569.27	38.71	18.67	57.38	74.00	-16.62	peak	
2	*	11569.41	29.82	18.67	48.49	54.00	-5.51	AVG	

Orthogonal Axis :	X
Test Mode :	TX 802.11a Mode 5825MHz

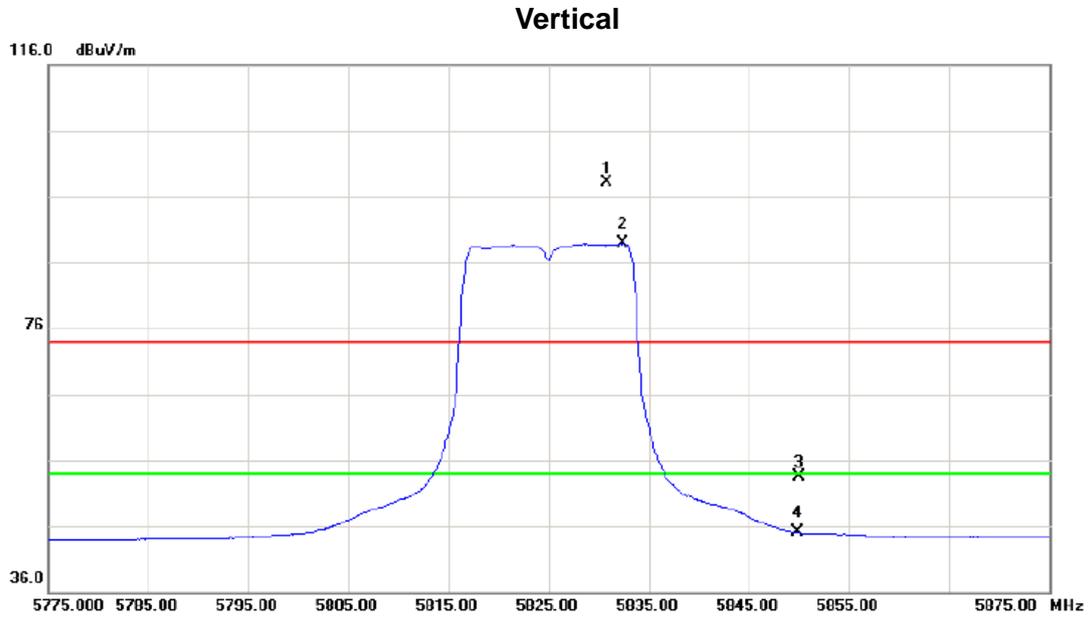

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5830.800	52.91	45.13	98.04	74.00	24.04	peak	
2	*	5832.400	43.77	45.13	88.90	54.00	34.90	AVG	
3		5850.000	8.22	45.23	53.45	74.00	-20.55	peak	
4		5850.000	-0.16	45.23	45.07	54.00	-8.93	AVG	


Orthogonal Axis :	X
Test Mode :	TX 802.11a Mode 5825MHz

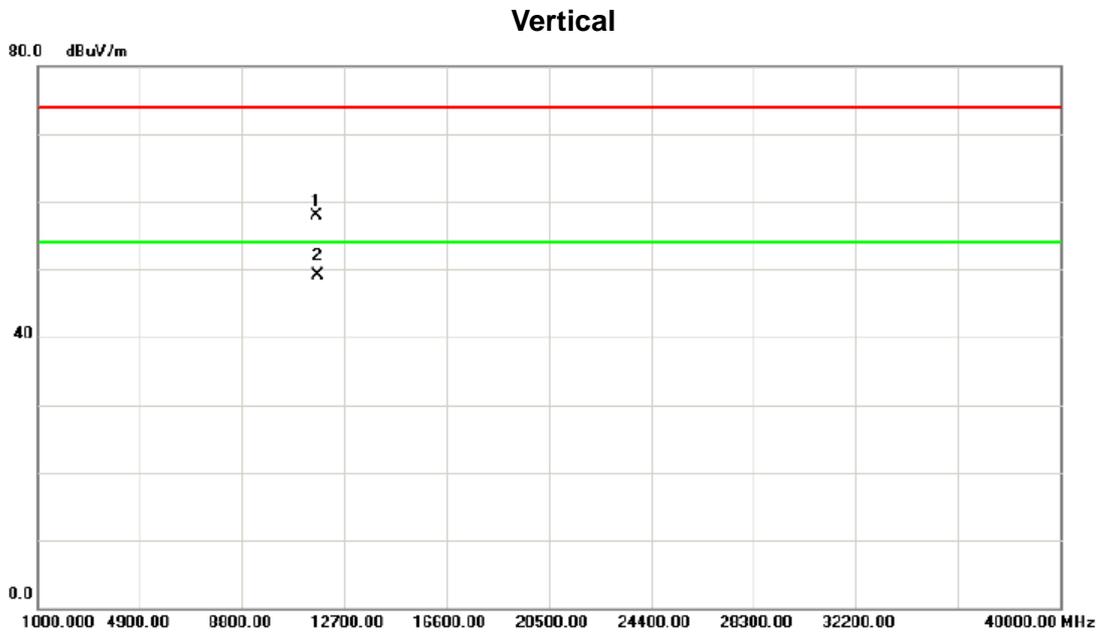

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11649.95	39.12	18.86	57.98	74.00	-16.02	peak	
2	*	11649.95	30.24	18.86	49.10	54.00	-4.90	AVG	

Orthogonal Axis :	X
Test Mode :	TX 802.11a Mode 5825MHz


Horizontal

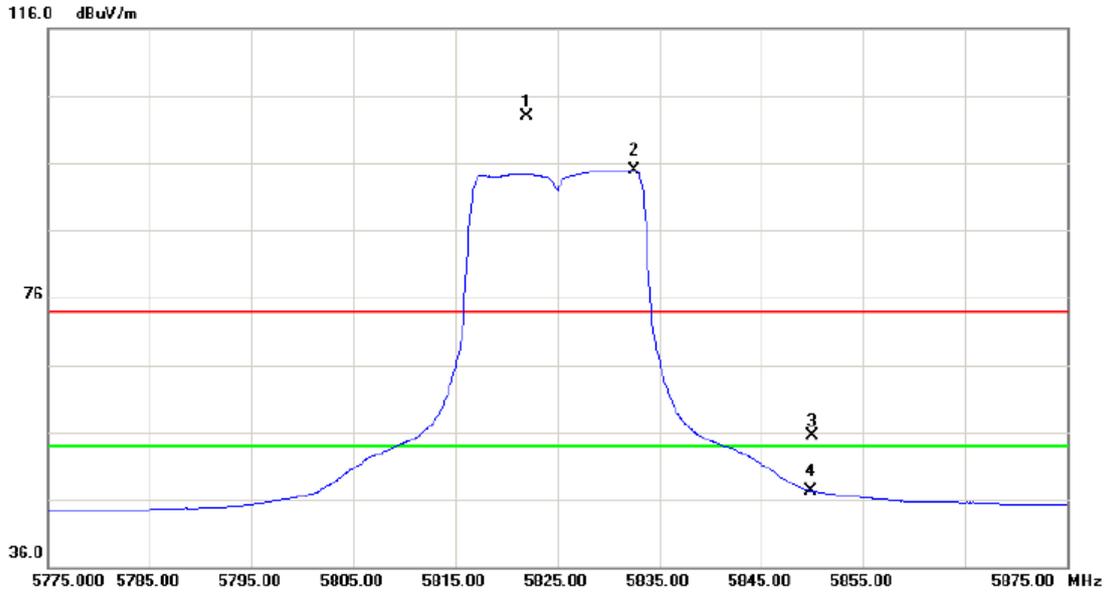

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5822.000	57.85	45.08	102.93	74.00	28.93	peak	
2	*	5832.500	49.83	45.13	94.96	54.00	40.96	AVG	
3		5850.000	10.20	45.23	55.43	74.00	-18.57	peak	
4		5850.000	2.04	45.23	47.27	54.00	-6.73	AVG	

Orthogonal Axis :	X
Test Mode :	TX 802.11a Mode 5825MHz


Horizontal

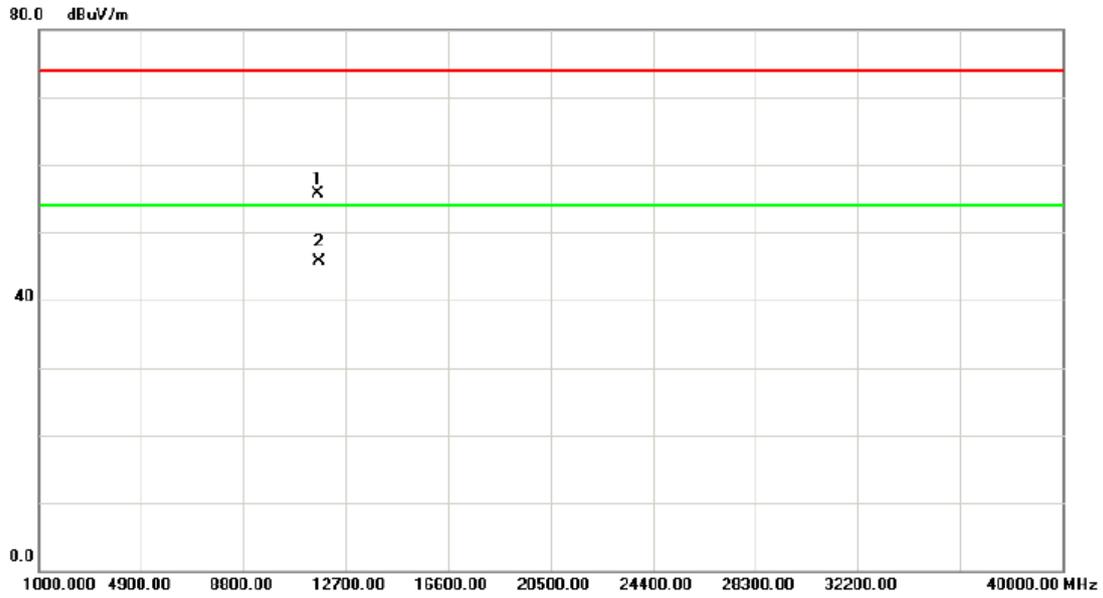

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.13	36.78	18.87	55.65	74.00	-18.35	peak	
2	*	11650.13	26.89	18.87	45.76	54.00	-8.24	AVG	

Orthogonal Axis :	X
Test Mode :	TX 802.11n(20 MHz) Mode 5745MHz


Vertical

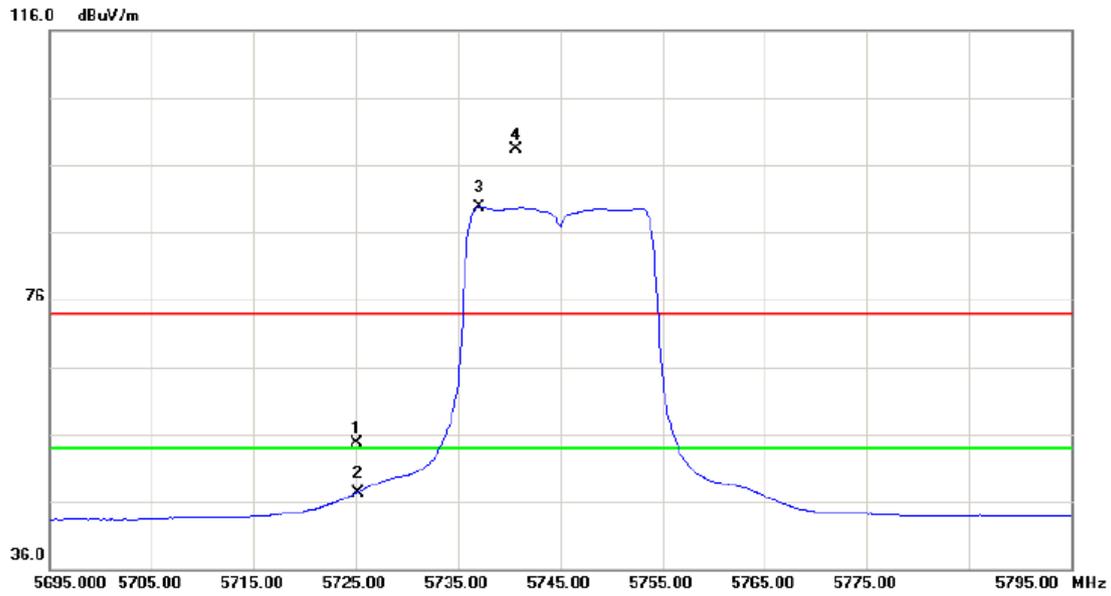

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5725.000	10.16	44.58	54.74	74.00	-19.26	peak	
2		5725.000	2.79	44.58	47.37	54.00	-6.63	AVG	
3	*	5737.100	45.06	44.64	89.70	54.00	35.70	AVG	
4	X	5740.700	53.70	44.66	98.36	74.00	24.36	peak	


Orthogonal Axis :	X
Test Mode :	TX 802.11n(20 MHz) Mode 5745MHz

Vertical

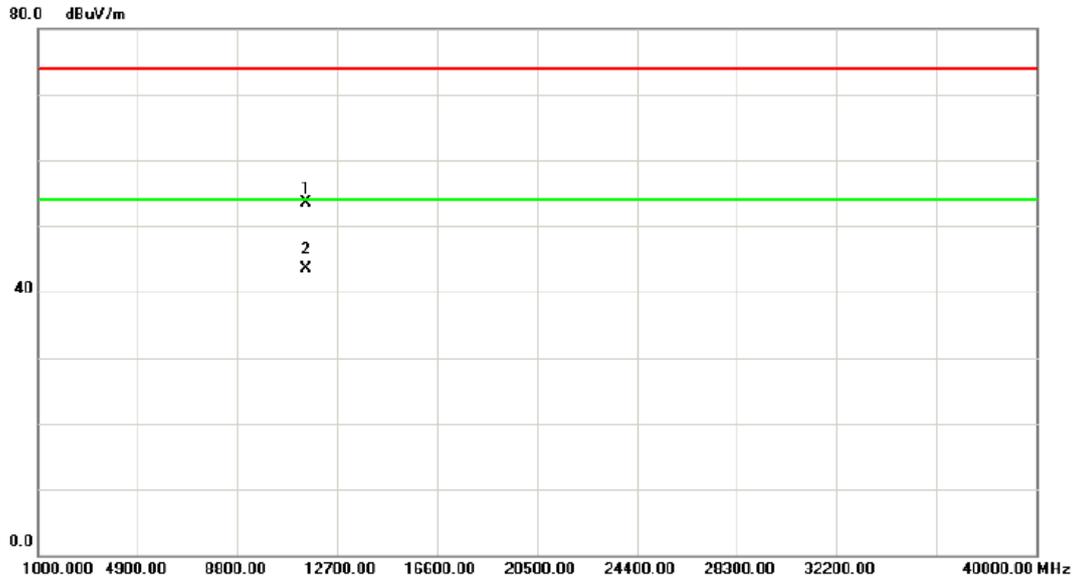

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11489.86	35.12	18.47	53.59	74.00	-20.41	peak	
2	*	11489.93	25.04	18.47	43.51	54.00	-10.49	AVG	


Orthogonal Axis :	X
Test Mode :	TX 802.11n(20 MHz) Mode 5745MHz

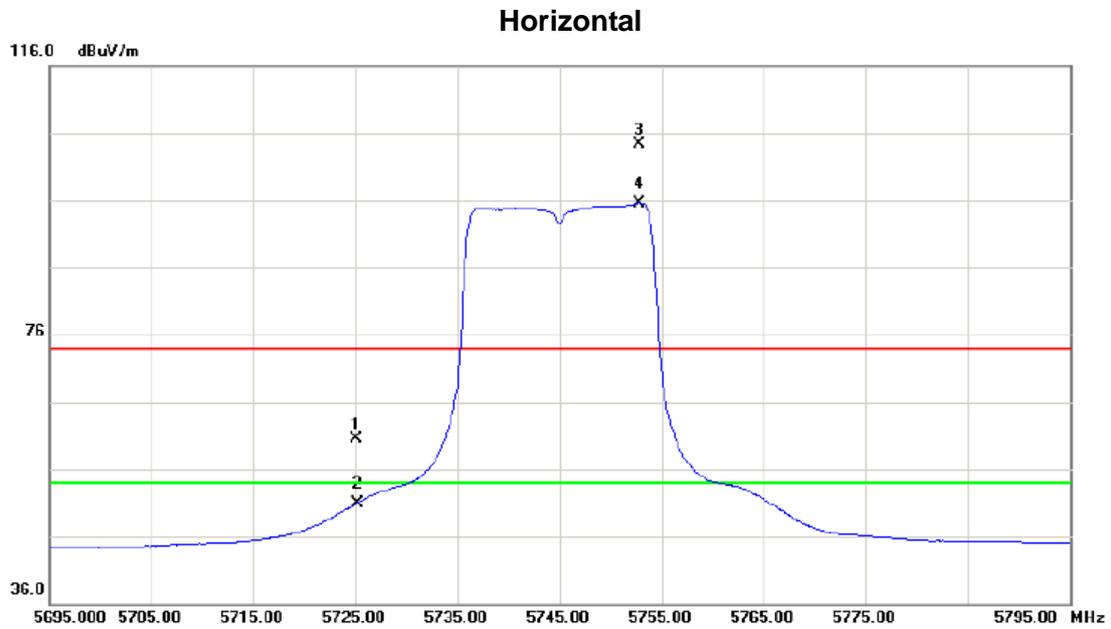

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5725.000	15.96	44.58	60.54	74.00	-13.46	peak	
2		5725.000	6.25	44.58	50.83	54.00	-3.17	AVG	
3	X	5752.800	59.59	44.72	104.31	74.00	30.31	peak	
4	*	5752.800	50.88	44.72	95.60	54.00	41.60	AVG	

Orthogonal Axis :	X
Test Mode :	TX 802.11n(20 MHz) Mode 5745MHz


Horizontal

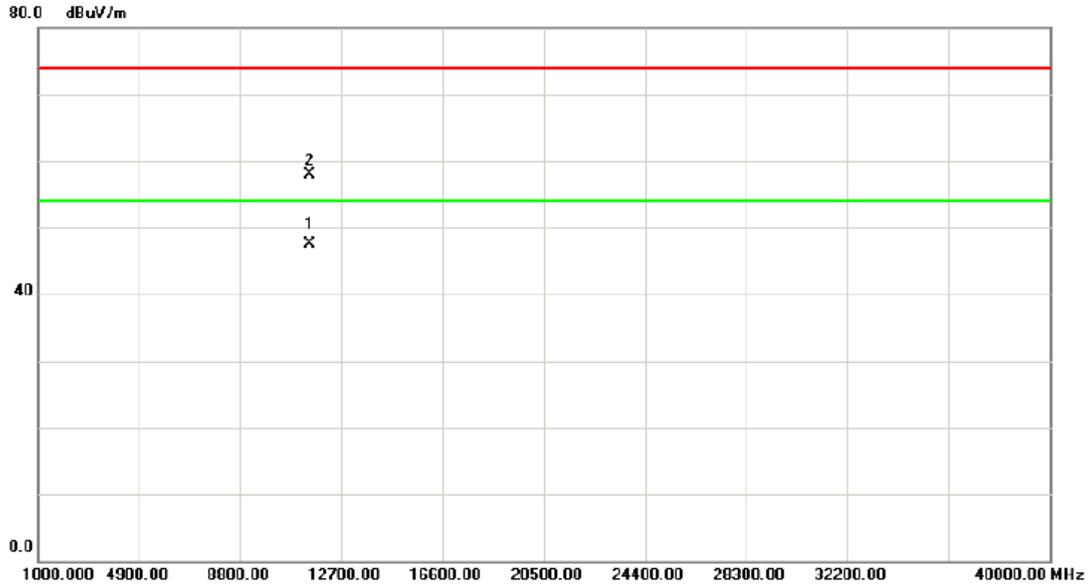

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11490.04	28.97	18.47	47.44	54.00	-6.56	AVG	
2		11490.12	39.42	18.47	57.89	74.00	-16.11	peak	

Orthogonal Axis :	X
Test Mode :	TX 802.11n(20 MHz) Mode 5785MHz


Vertical

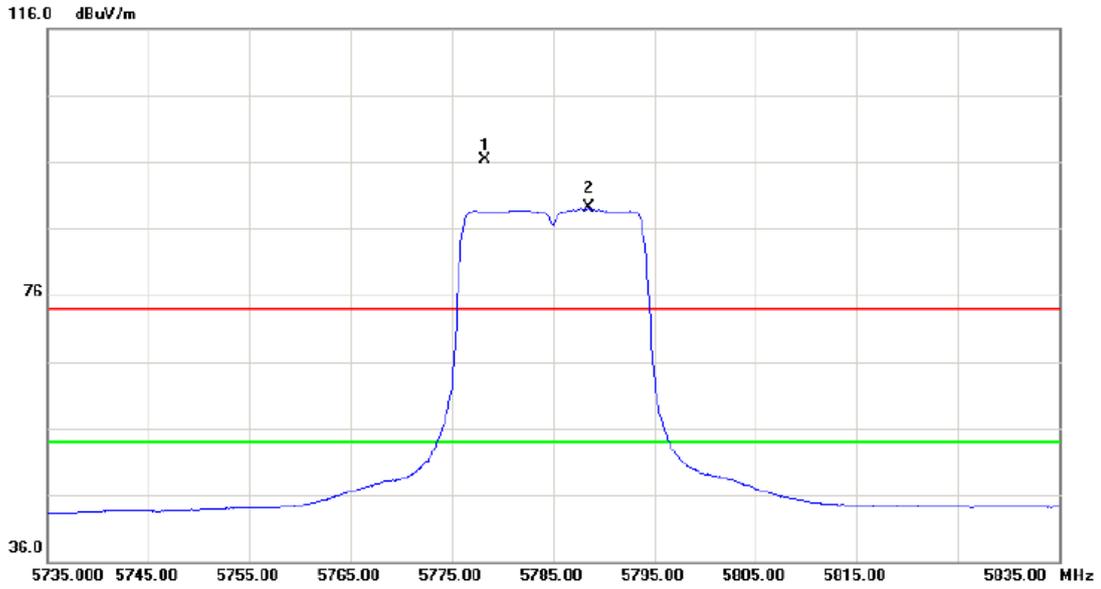

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5778.200	51.54	44.85	96.39	74.00	22.39	peak	
2	*	5788.500	44.13	44.91	89.04	54.00	35.04	AVG	


Orthogonal Axis :	X
Test Mode :	TX 802.11n(20 MHz) Mode 5785MHz

Vertical

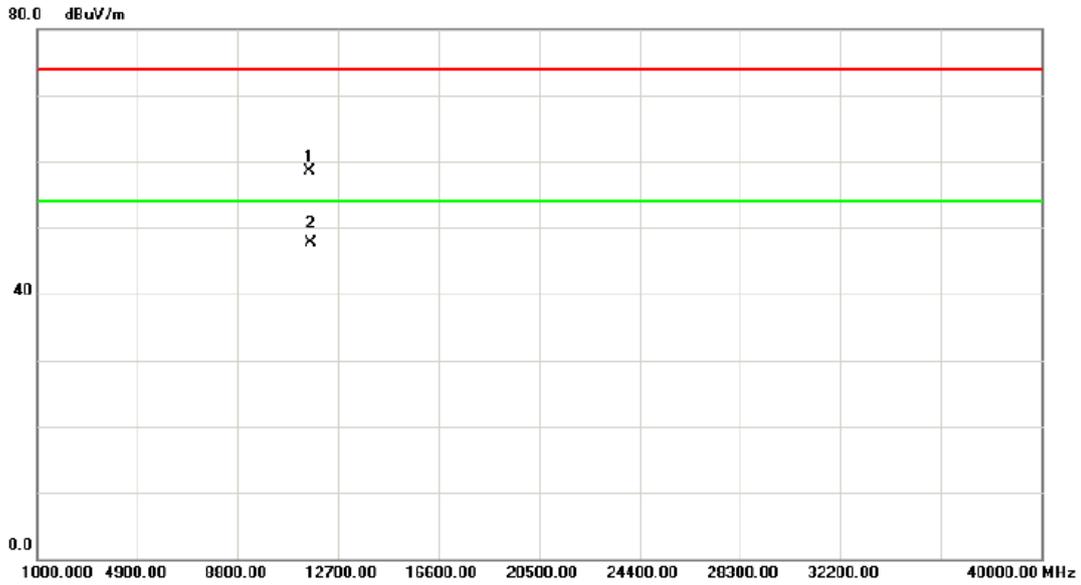

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.15	39.87	18.67	58.54	74.00	-15.46	peak	
2	*	11570.19	29.04	18.67	47.71	54.00	-6.29	AVG	


Orthogonal Axis :	X
Test Mode :	TX 802.11n(20 MHz) Mode 5785MHz

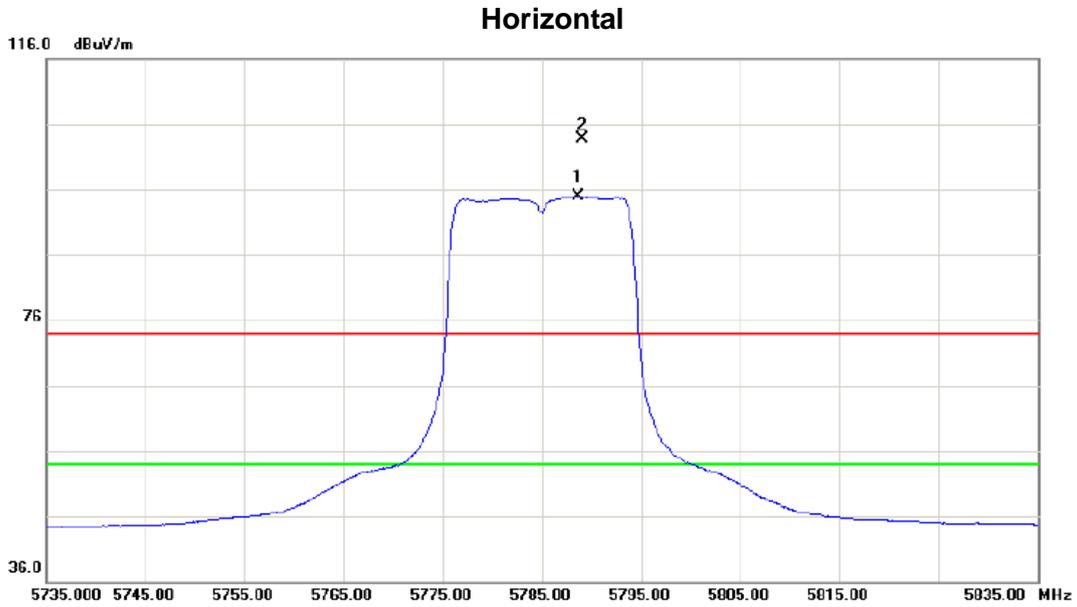

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5788.600	50.00	44.91	94.91	54.00	40.91	AVG	
2	X	5789.000	58.75	44.91	103.66	74.00	29.66	peak	


Orthogonal Axis :	X
Test Mode :	TX 802.11n(20 MHz) Mode 5785MHz

Horizontal

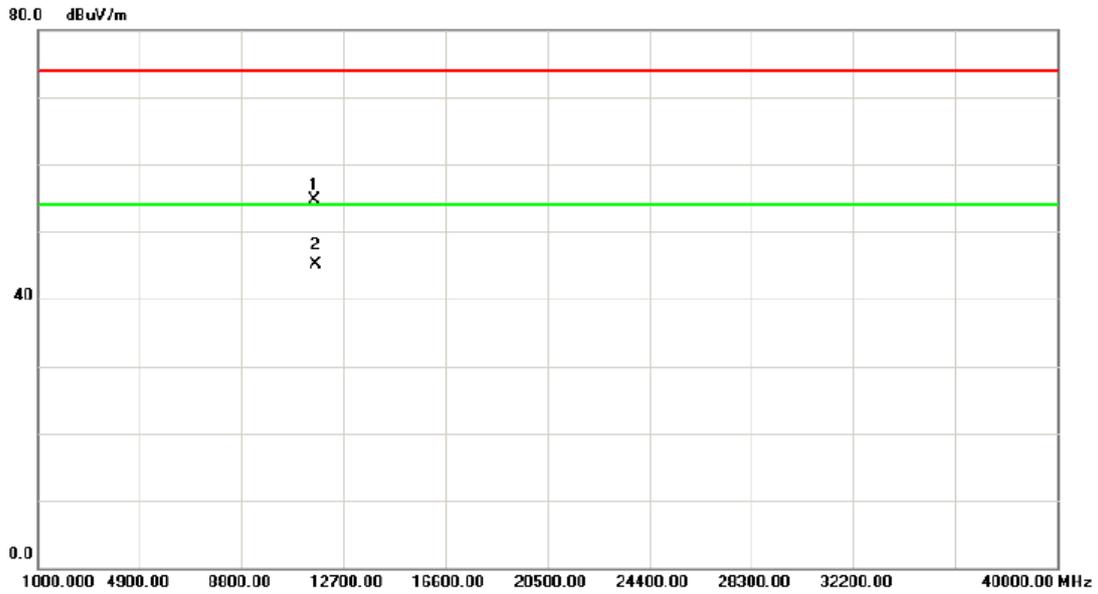

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.05	35.96	18.67	54.63	74.00	-19.37	peak	
2	*	11570.11	26.37	18.67	45.04	54.00	-8.96	AVG	


Orthogonal Axis :	X
Test Mode :	TX 802.11n(20 MHz) Mode 5825MHz

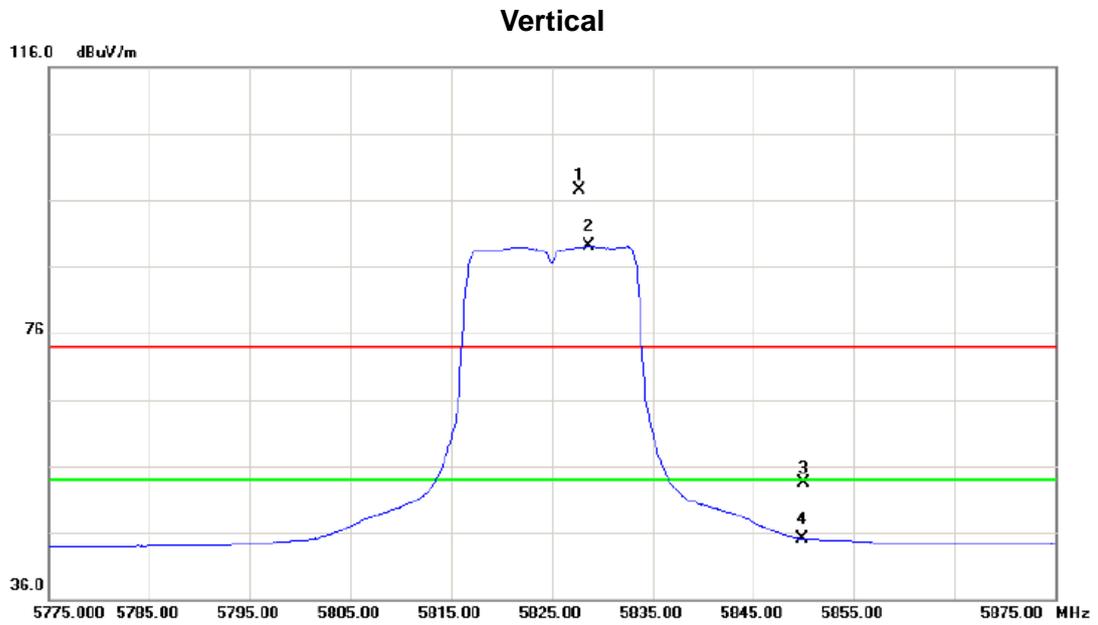

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5827.700	52.35	45.11	97.46	74.00	23.46	peak	
2	*	5828.600	43.93	45.12	89.05	54.00	35.05	AVG	
3		5850.000	8.21	45.23	53.44	74.00	-20.56	peak	
4		5850.000	-0.13	45.23	45.10	54.00	-8.90	AVG	

Orthogonal Axis :	X
Test Mode :	TX 802.11n(20 MHz) Mode 5825MHz


Vertical

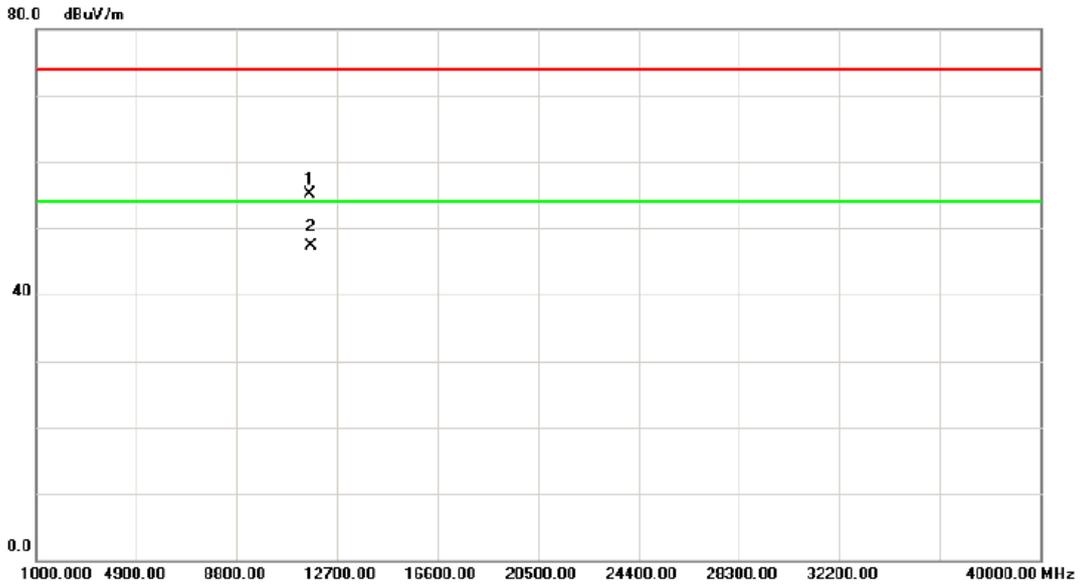

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11649.89	36.23	18.86	55.09	74.00	-18.91	peak	
2	*	11650.07	28.47	18.87	47.34	54.00	-6.66	AVG	


Orthogonal Axis :	X
Test Mode :	TX 802.11n(20 MHz) Mode 5825MHz

Horizontal

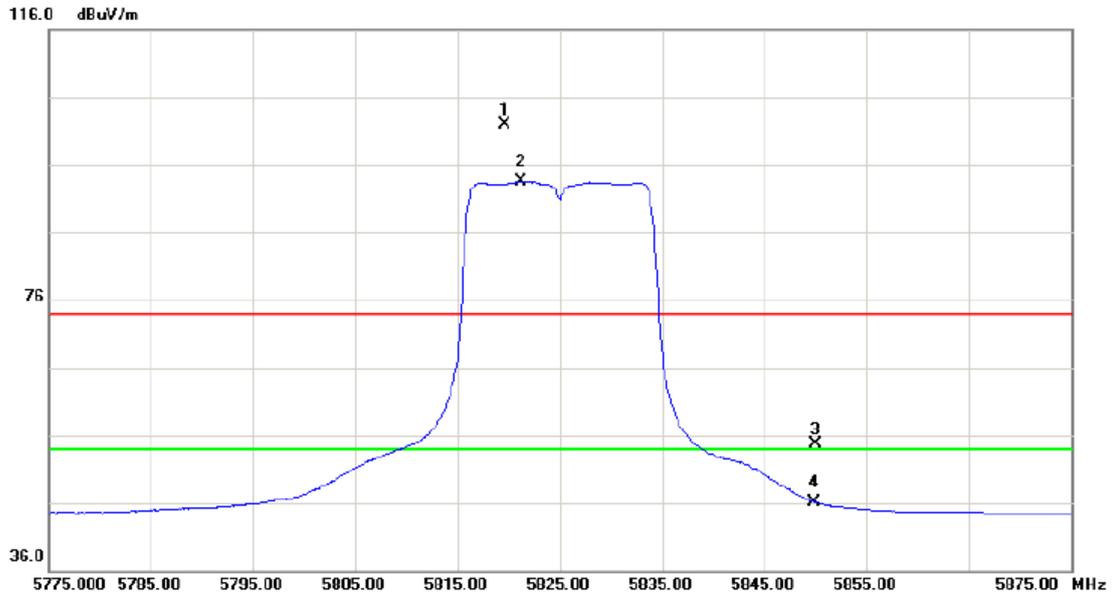

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5819.600	56.81	45.07	101.88	74.00	27.88	peak	
2	*	5821.200	48.41	45.07	93.48	54.00	39.48	AVG	
3		5850.000	9.39	45.23	54.62	74.00	-19.38	peak	
4		5850.000	0.92	45.23	46.15	54.00	-7.85	AVG	

Orthogonal Axis :	X
Test Mode :	TX 802.11n(20 MHz) Mode 5825MHz

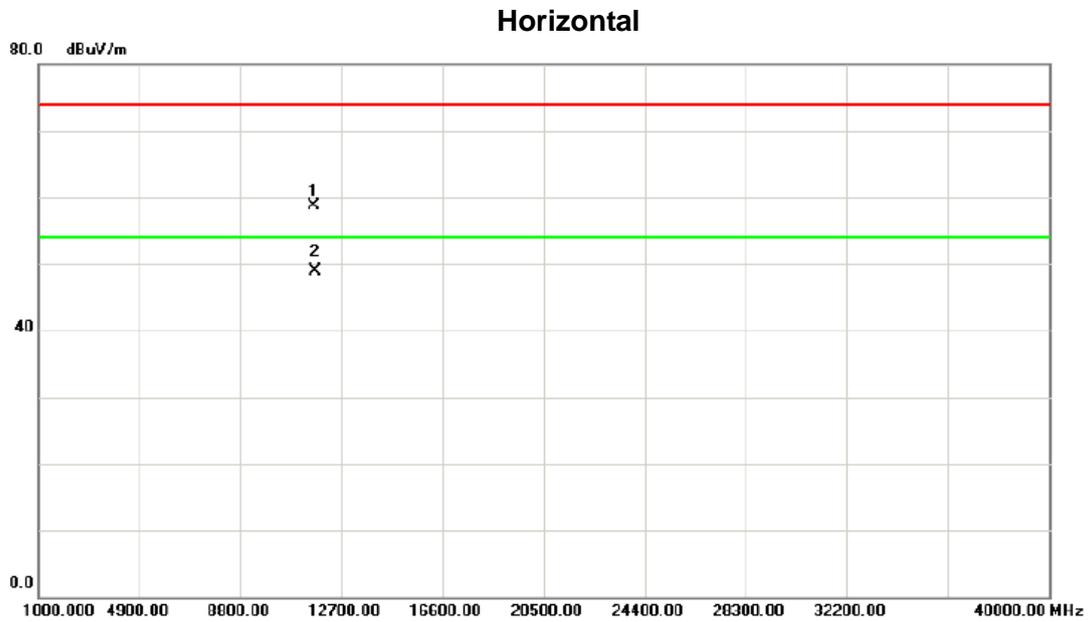


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.13	39.78	18.87	58.65	74.00	-15.35	peak	
2	*	11650.21	30.01	18.87	48.88	54.00	-5.12	AVG	

ATTACHMENT E - BANDWIDTH


Test Mode : TX 802.11a Mode_CH149/157/165

TX CH 149

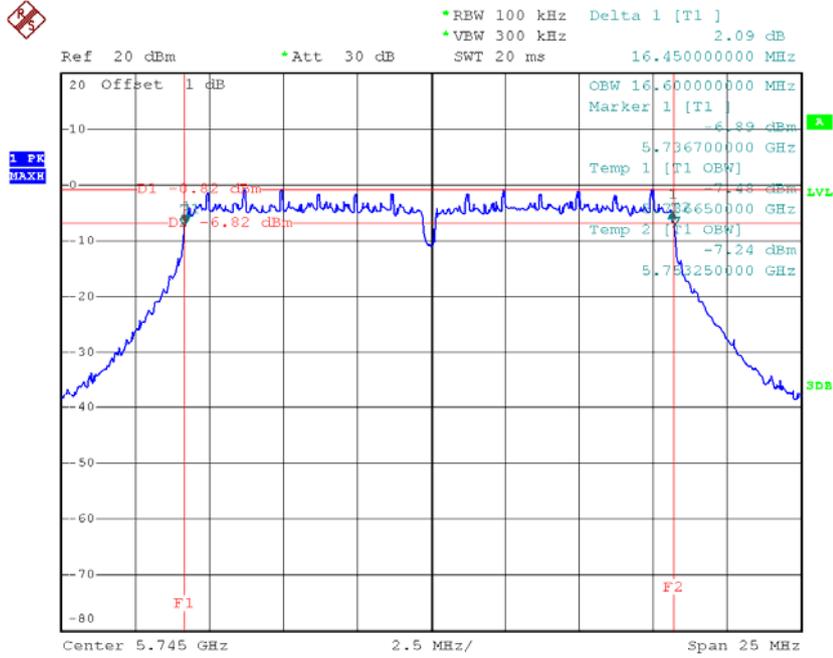


Date: 14.JUN.2014 06:38:20

TX CH 157

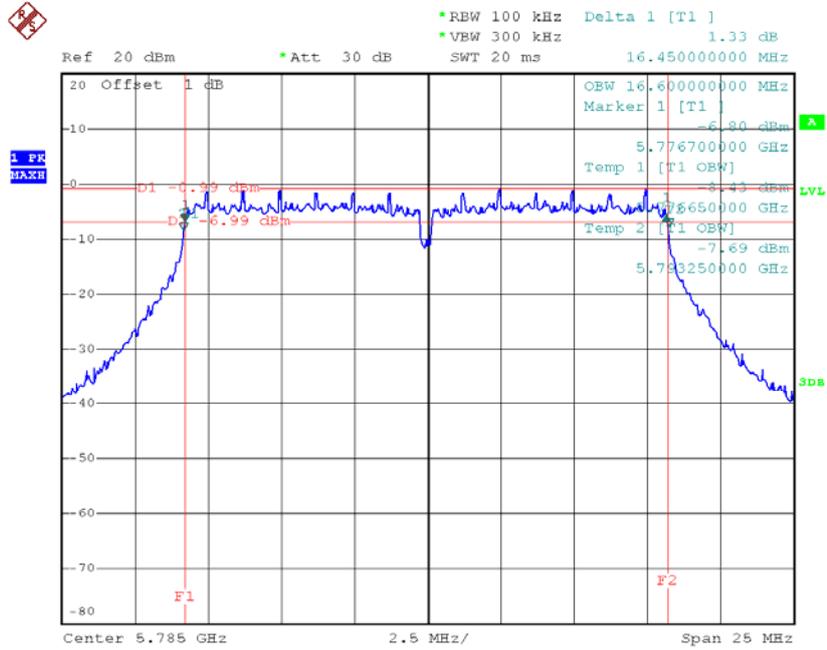

Date: 14.JUN.2014 06:41:35


TX CH 165

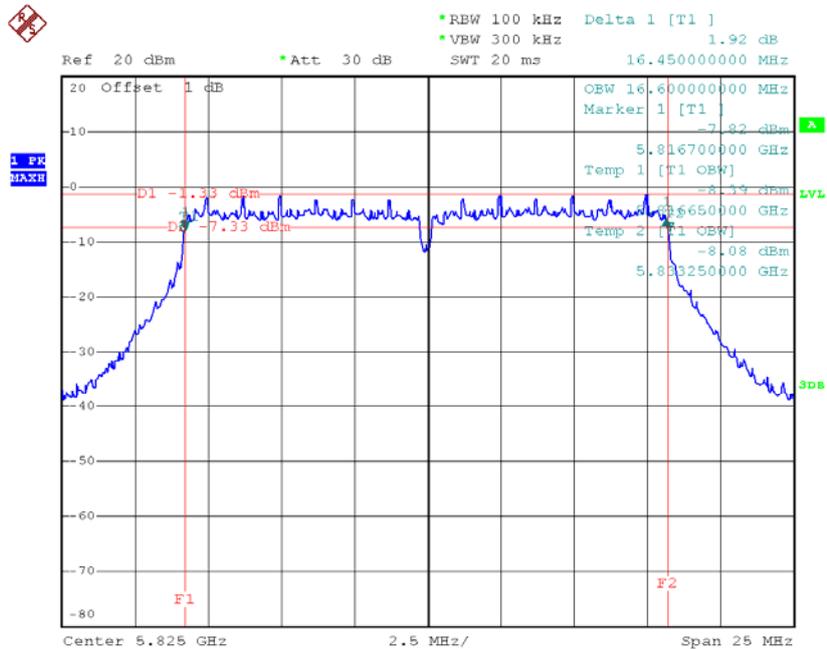

Date: 14.JUN.2014 06:44:25


Test Mode : TX 802.11n(20 MHz) Mode_CH149/157/165

TX CH 149

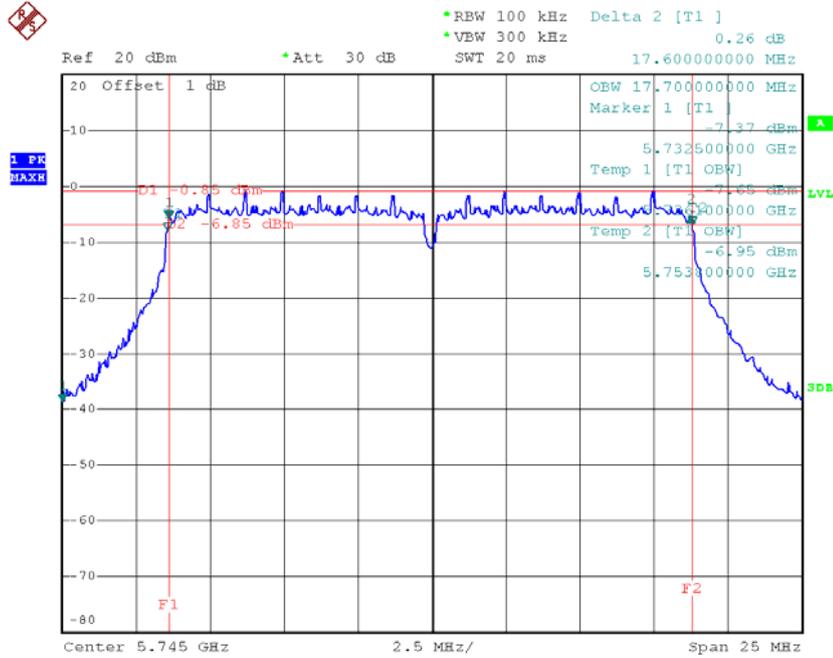


Date: 14.JUN.2014 06:24:41

TX CH 157

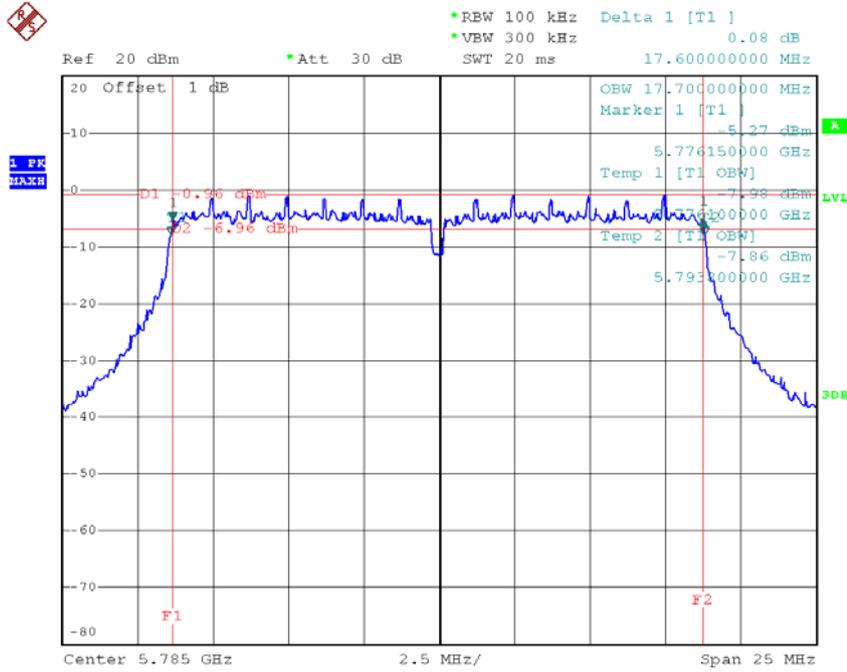

Date: 14.JUN.2014 06:28:43

TX CH 165

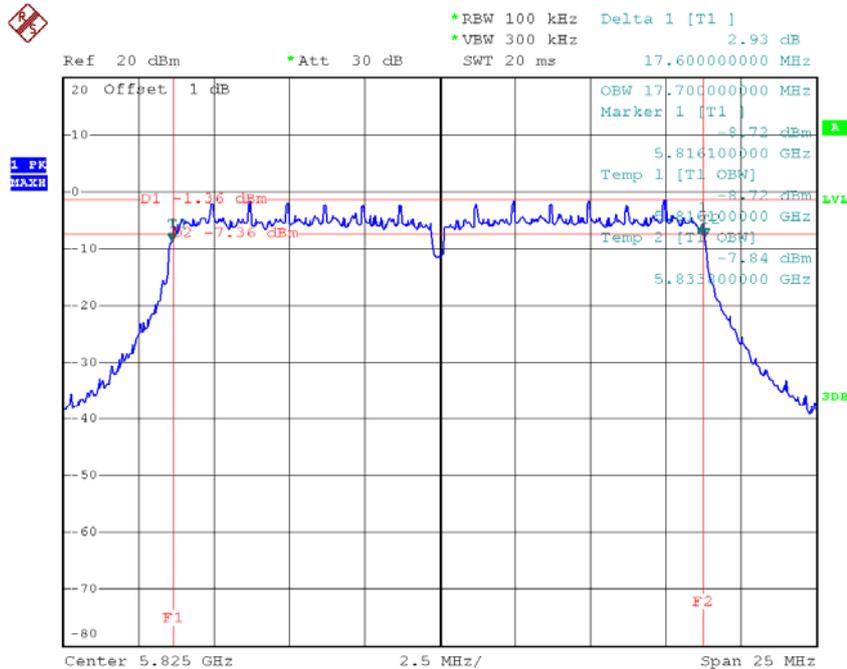

Date: 14.JUN.2014 06:32:00

ATTACHMENT F - MAXIMUM OUTPUT POWER

Test Mode : TX 802.11a Mode

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	20.47	30	1
CH157	5785	20.44	30	1
CH165	5825	20.51	30	1

Test Mode : TX 802.11n(20 MHz) Mode


Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.93	30	1
CH157	5785	19.91	30	1
CH165	5825	19.97	30	1

**ATTACHMENT G – ANTENNA CONDUCTED SPURIOUS
EMISSION**




Test Mode :	TX 802.11a Mode
--------------------	------------------------

TX 802.11a Mode CH149

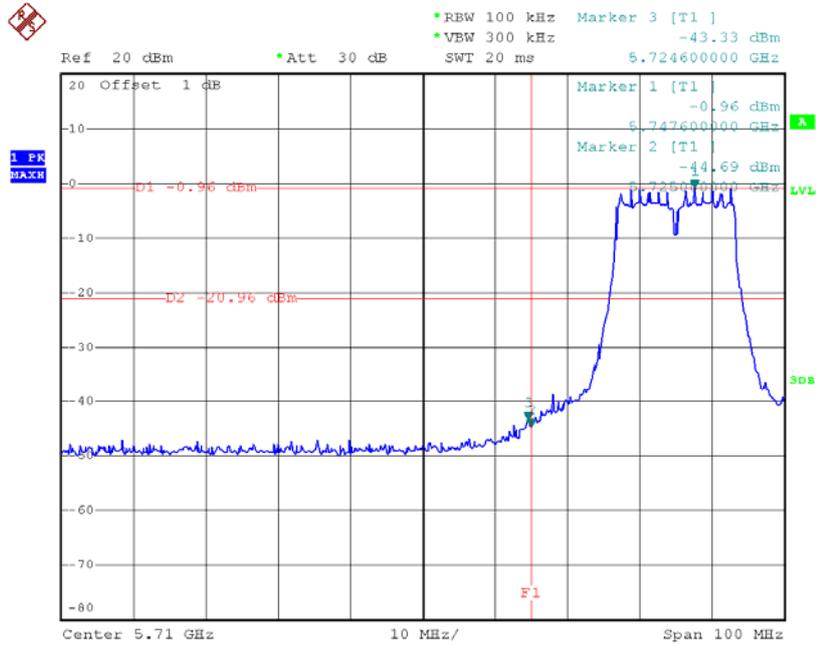


Date: 14.JUN.2014 06:39:13

TX 802.11a Mode CH165

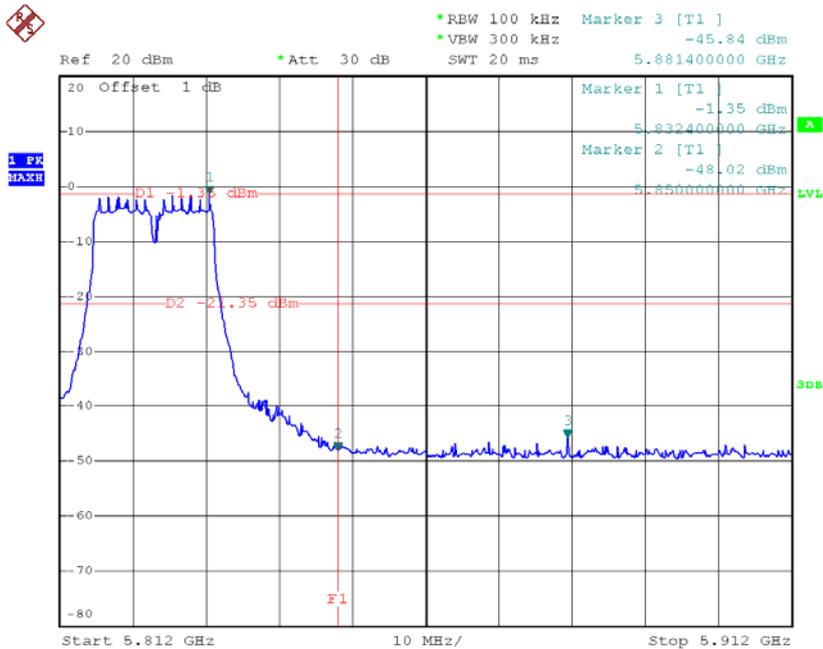


Date: 14.JUN.2014 06:45:29

TX 802.11a Mode CH149 (30MHz to 1000MHz)

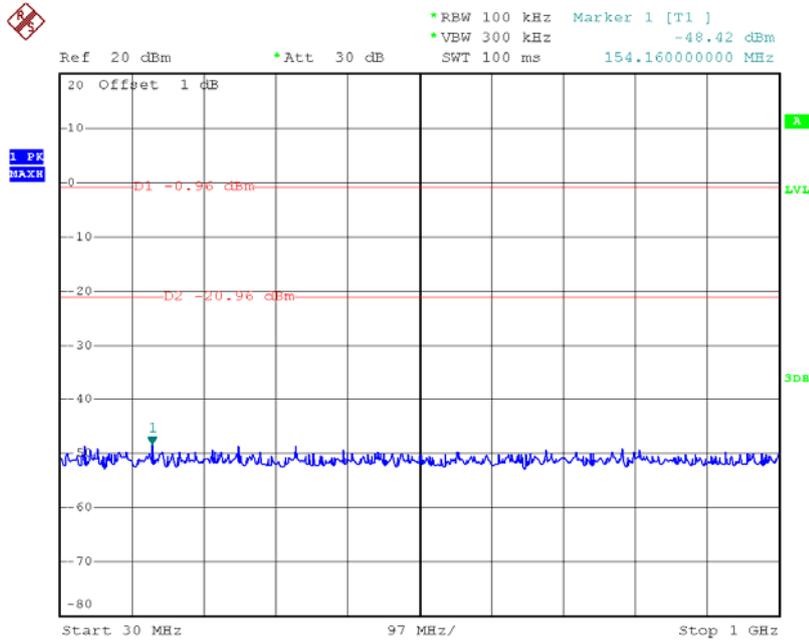


Date: 14.JUN.2014 06:39:26

TX 802.11a Mode CH149 (1000MHz to 10th Harmonic)

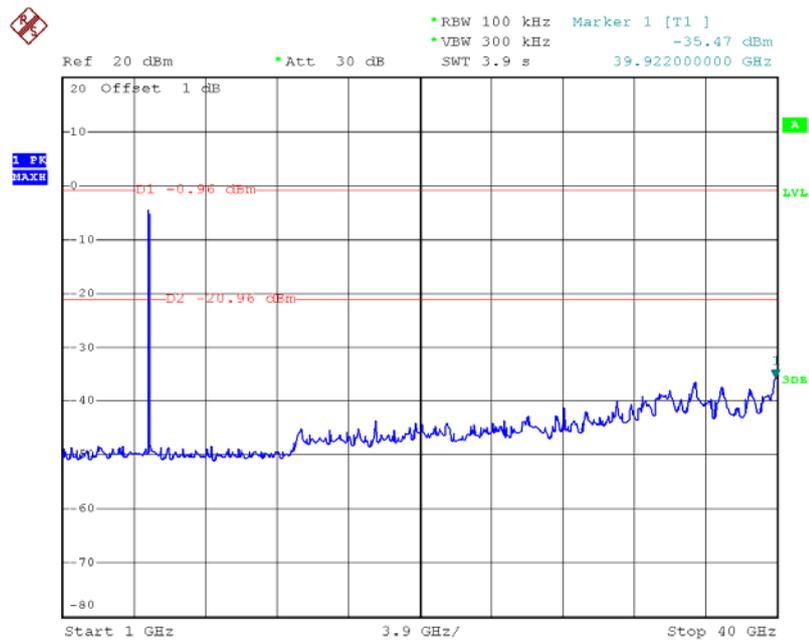


Date: 14.JUN.2014 06:39:40

TX 802.11a Mode CH157 (30MHz to 1000MHz)

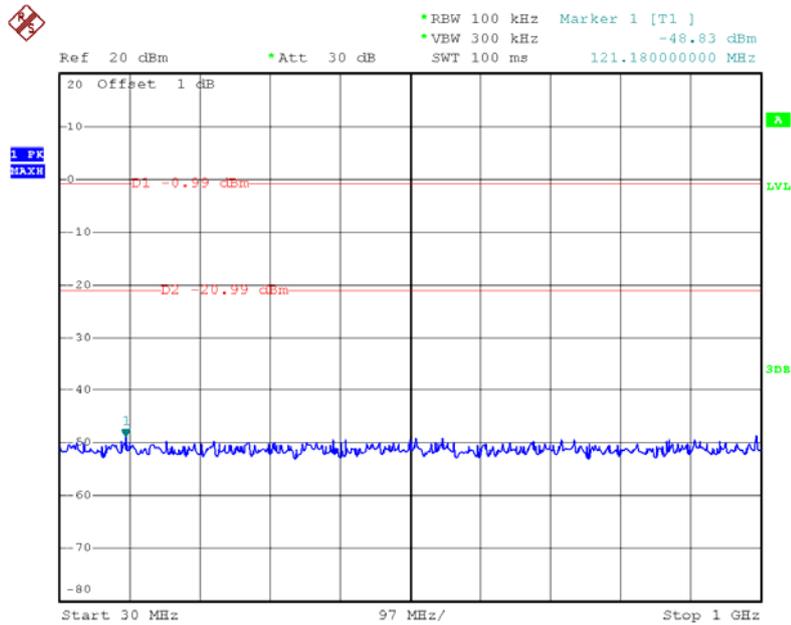


Date: 14.JUN.2014 06:42:21

TX 802.11a Mode CH157 (1000MHz to 10th Harmonic)

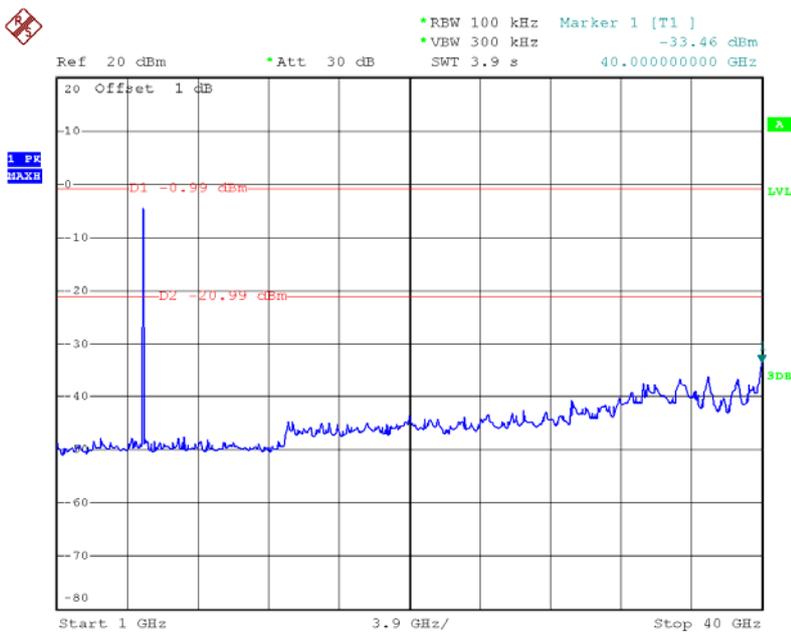


Date: 14.JUN.2014 06:42:47

TX 802.11a Mode CH165 (30MHz to 1000MHz)

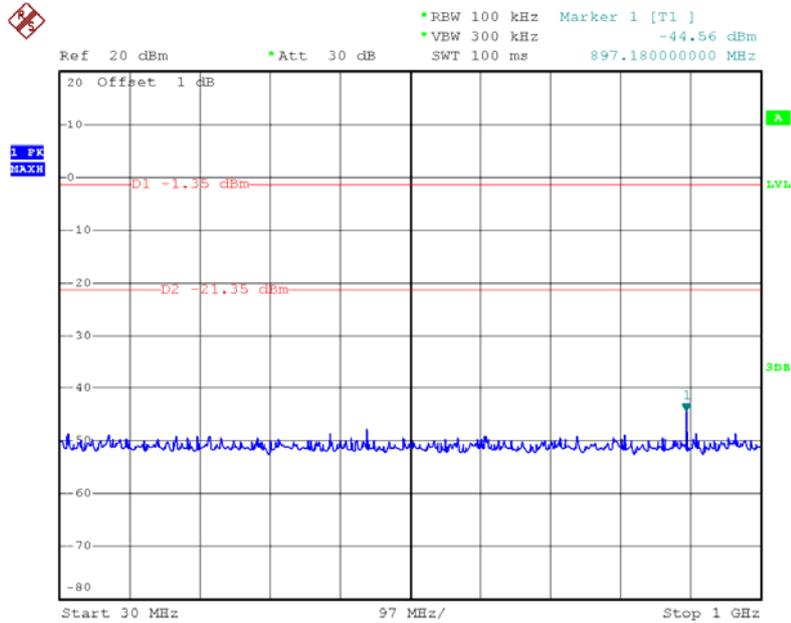

Date: 14.JUN.2014 06:45:50


TX 802.11a Mode CH165 (1000MHz to 10th Harmonic)

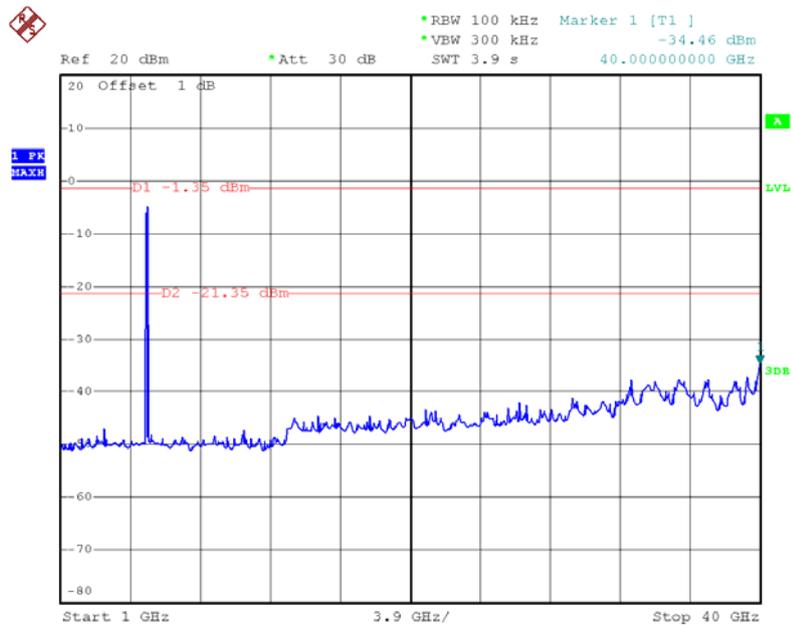

Date: 14.JUN.2014 06:46:04


Test Mode :	TX 802.11n(20 MHz) Mode
--------------------	--------------------------------

TX mode CH149

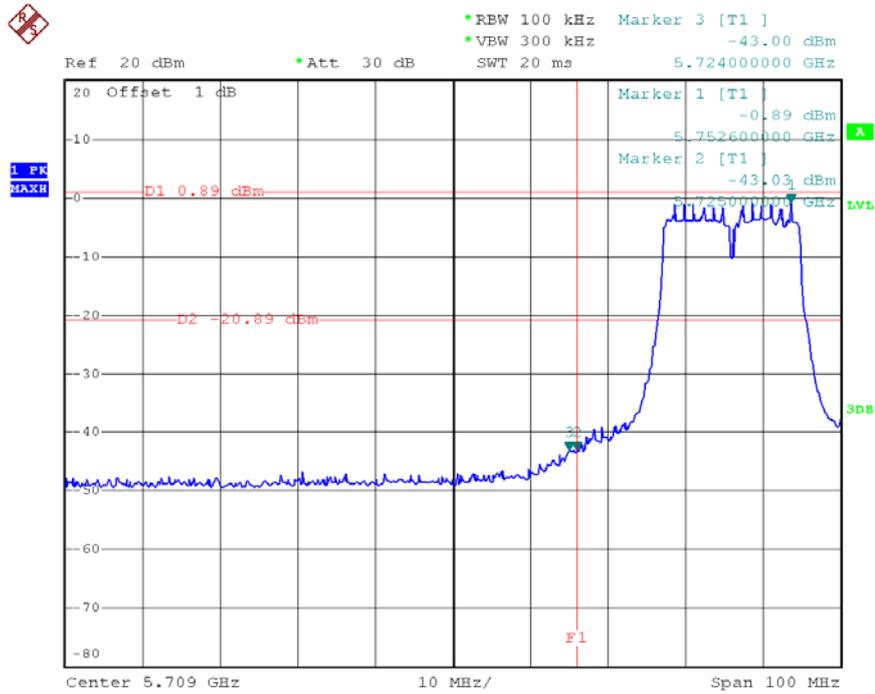


Date: 14.JUN.2014 06:26:39

TX mode CH165

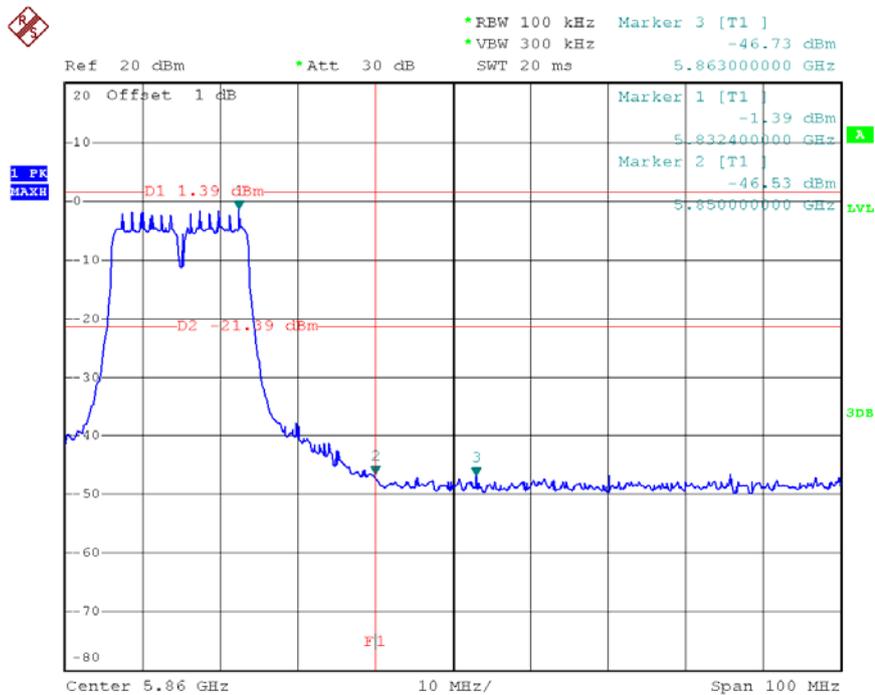


Date: 14.JUN.2014 06:32:57

TX mode CH149 (30MHz to 1000MHz)

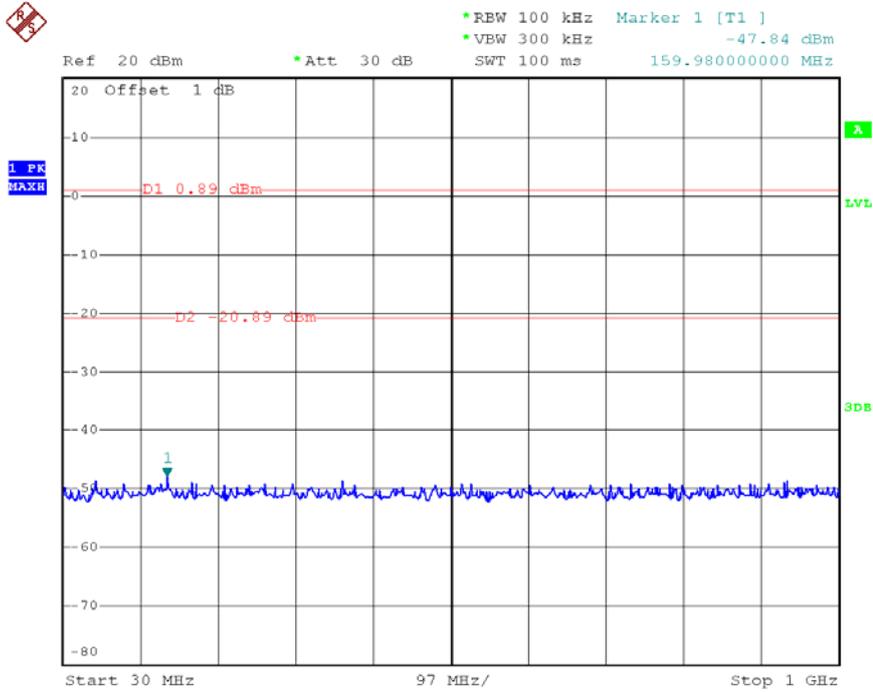


Date: 14.JUN.2014 06:27:05

TX mode CH149 (1000MHz to 10th Harmonic)

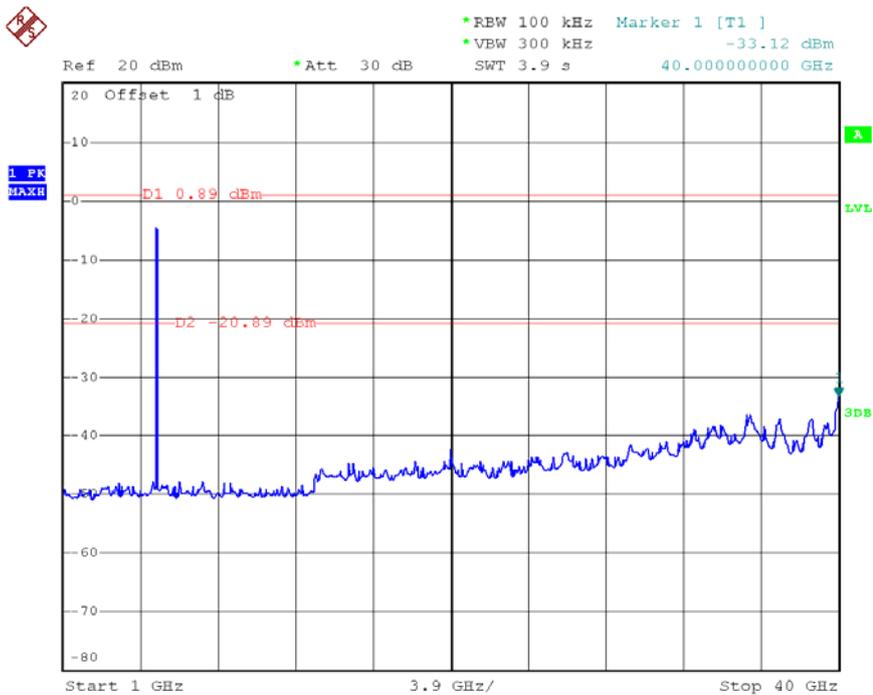


Date: 14.JUN.2014 06:27:24

TX mode CH157 (30MHz to 1000MHz)

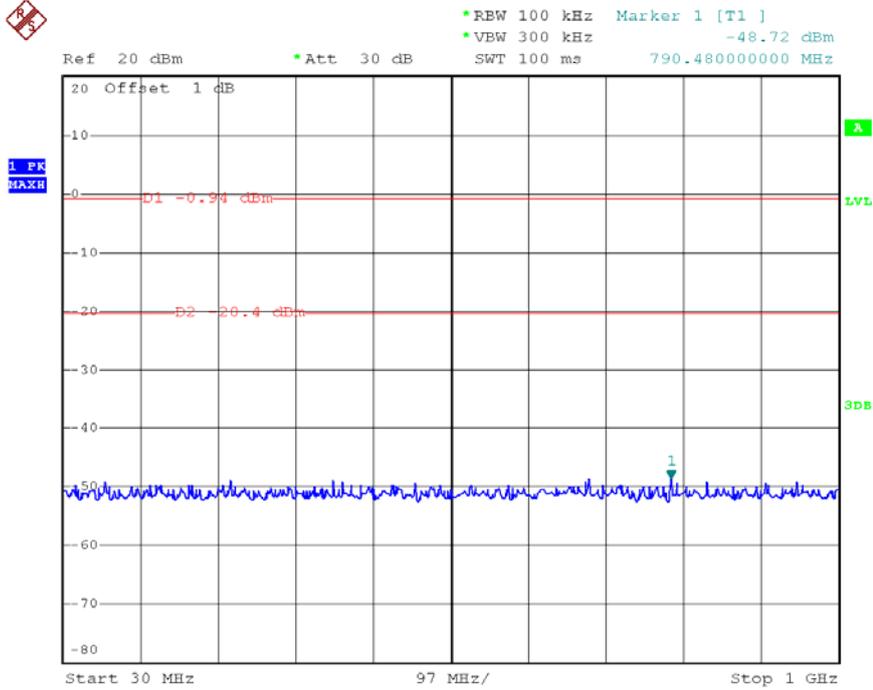


Date: 14.JUN.2014 06:29:36

TX mode CH157 (1000MHz to 10th Harmonic)

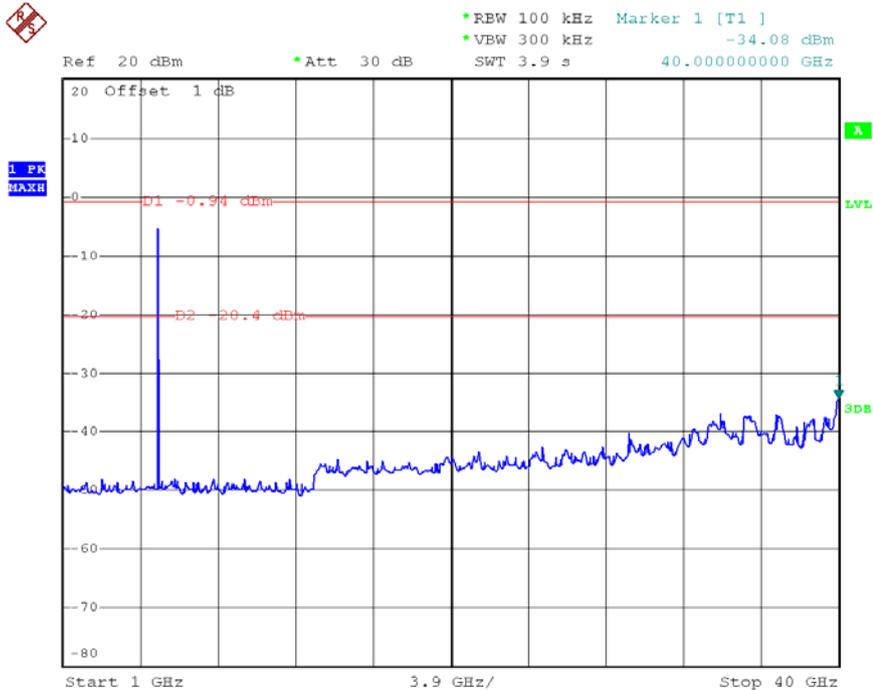


Date: 14.JUN.2014 06:29:56

TX mode CH165 (30MHz to 1000MHz)

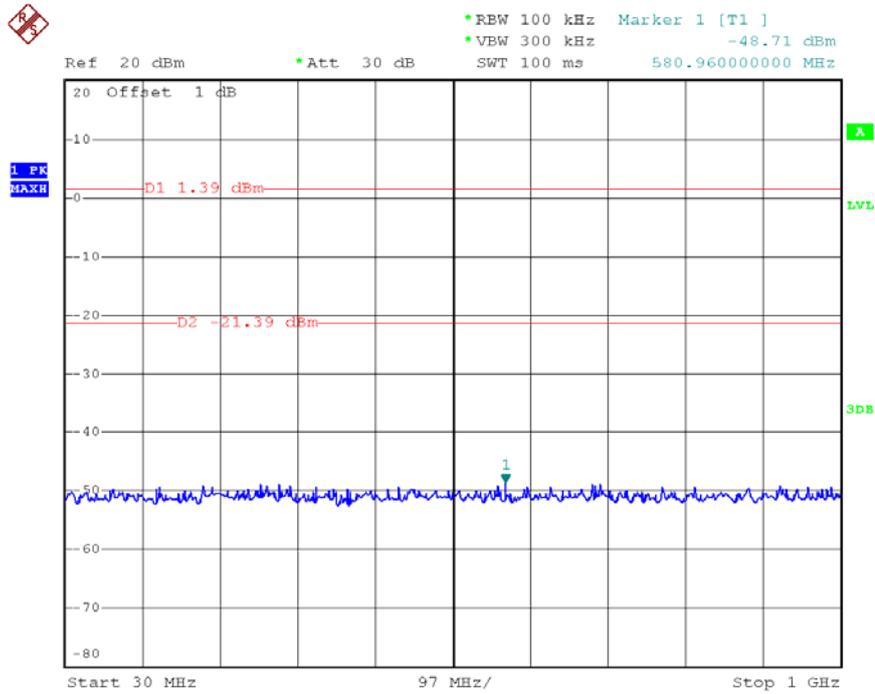

Date: 14.JUN.2014 06:33:18

TX mode CH165 (1000MHz to 10th Harmonic)

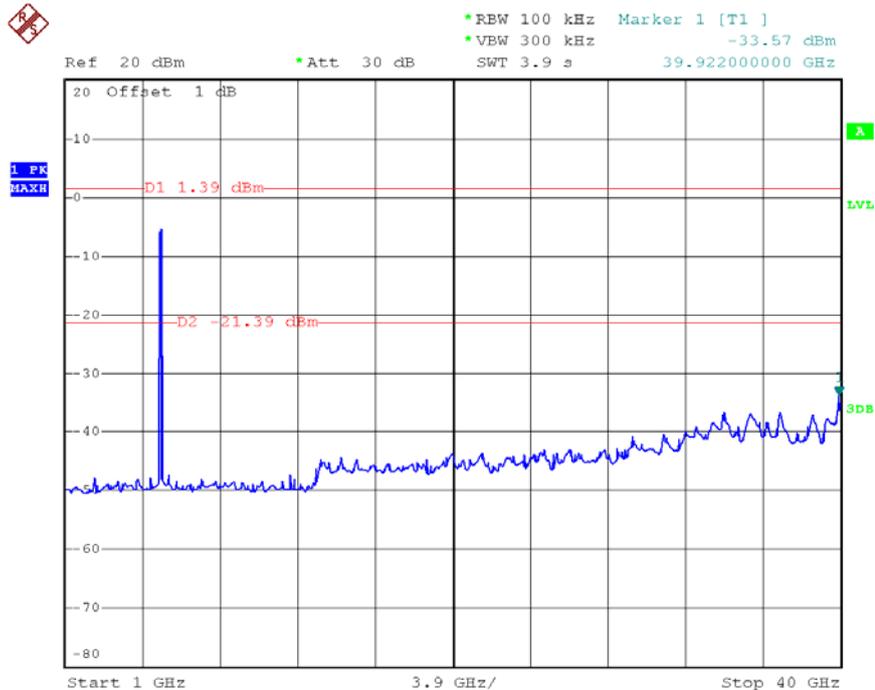


Date: 14.JUN.2014 06:33:50

ATTACHMENT H – POWER SPECTRAL DENSITY

Test Mode :TX 802.11a Mode_CH149/157/165


TX CH149

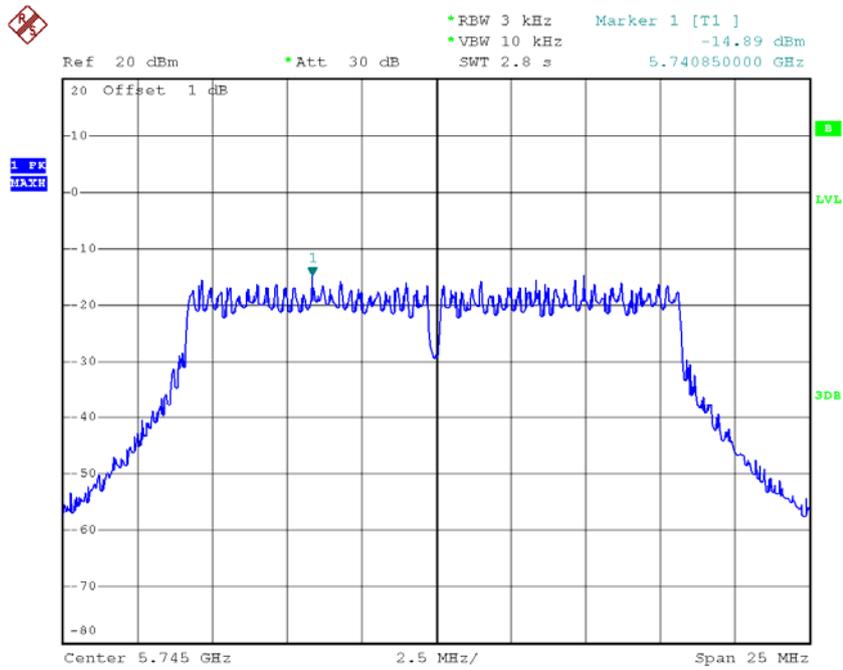

Date: 14.JUN.2014 06:37:16


Test Mode : TX 802.11n(20 MHz) Mode_CH149/157/165

TX CH149

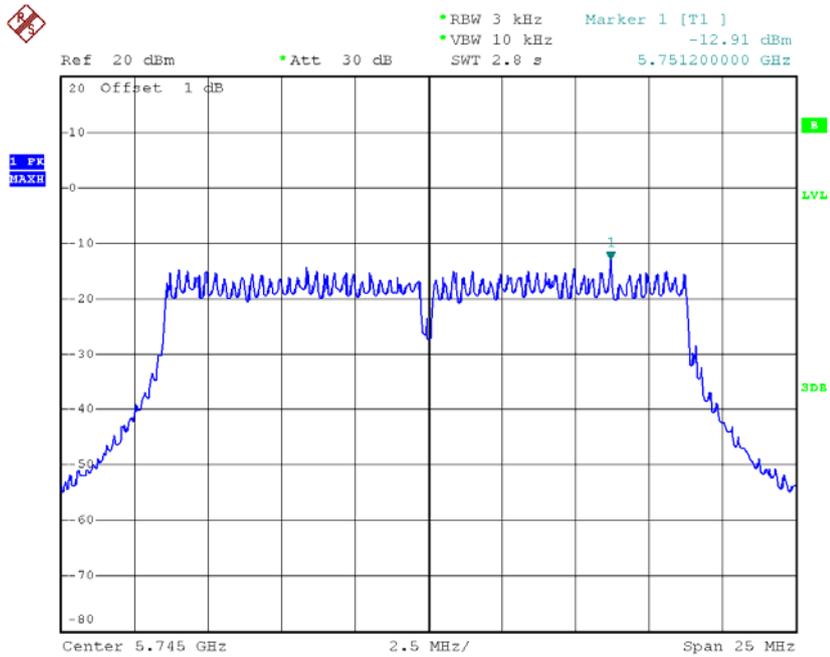


Date: 14.JUN.2014 06:23:03

TX CH157

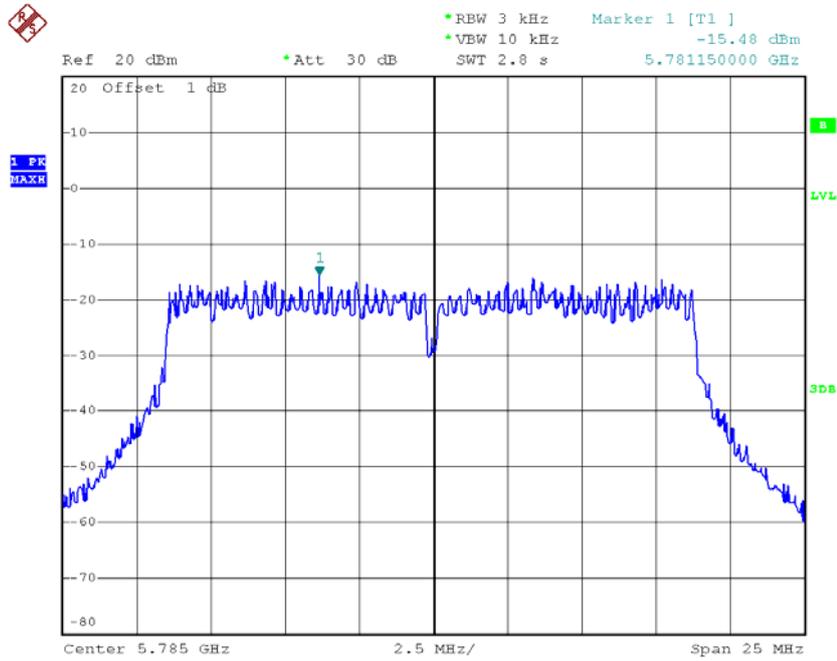

Date: 14.JUN.2014 06:27:54

TX CH165

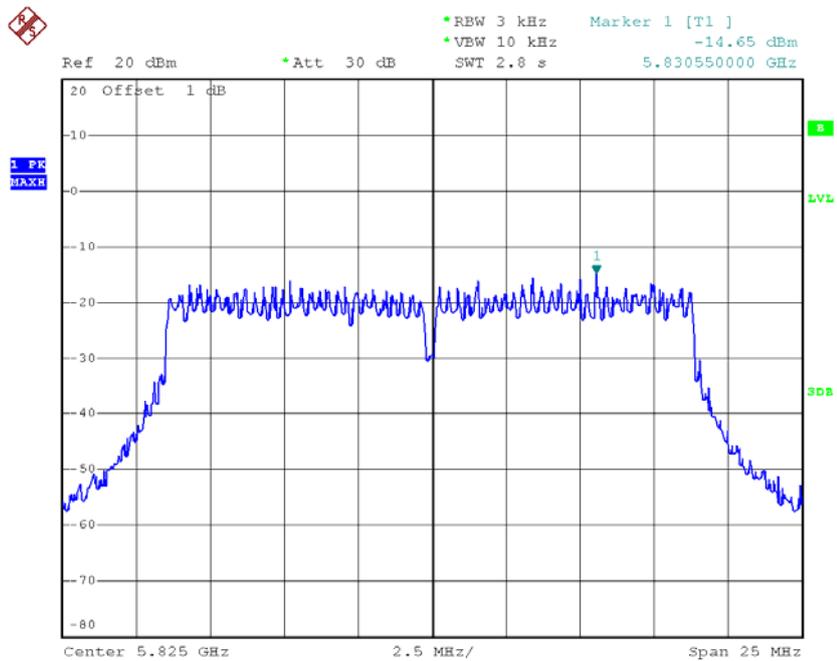

Date: 14.JUN.2014 06:31:04