

FCC Test Report

FCC ID: QISSCL-L03

Project No. : 1506C078
Equipment : Smart Phone
Model Name : HUAWEI SCL-L03, SCL-L03
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Jun. 08, 2015
Date of Test : Jun. 08, 2015 ~ Jun. 25, 2015
Issued Date : Jun. 26, 2015
Tested by : BTL Inc.

Testing Engineer : Kener Wu
(Kener Wu)

Technical Manager : Jeff Yang
(Jeff Yang)

Authorized Signatory : Andy Chiu
(Andy Chiu)

B T L I N C .

B1, No. 37, Lane 365, Yang-Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	16
4.2.6 TEST RESULTS (30 TO 1000 MHZ)	17
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	17
5 . EUT TEST PHOTO	18
6 . MEASUREMENT INSTRUMENTS LIST	24
ATTACHMENT A - CONDUCTED EMISSION	25
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	54
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	85

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1506C078	Original Issue.	Jun. 26, 2015

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : HUAWEI SCL-L03, SCL-L03
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen
518129, P.R.China
Date of Test : Jun. 08, 2015 ~ Jun. 25, 2015
Standard(s) : FCC Part 15, Subpart B:2014
ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1506C078) were oBTained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B:2014 ANSI C63.4-2009	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

(1) " N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of B1, No. 37, Lane 365, Yang-Guang St., Nei-Hu District, Taipei City 114, Taiwan.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	Note
C02	CISPR	150 KHz ~ 30MHz	2.59	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)	Note
CB08	CISPR	30MHz ~ 200MHz	V	3.22	
		30MHz ~ 200MHz	H	3.55	
		200MHz ~ 1,000MHz	V	3.24	
		200MHz ~ 1,000MHz	H	3.11	
		1,000MHz ~ 18,000MHz	V	4.05	
		1,000MHz ~ 18,000MHz	H	3.97	
		18,000MHz ~ 40,000MHz	V	4.04	
18,000MHz ~ 40,000MHz	H	4.01			

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	HUAWEI SCL-L03, SCL-L03
Model Difference	N/A
Power Source	#1 DC Voltage supplied from AC/DC adapter. #2 Supplied from battery.
Power Rating	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT's maximum operating frequency is 4GHz

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.





Pretest Mode	Description
Mode 1	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Mode 2	Adapter+Speaker+Playing+idle
Mode 3	Adapter+Traffic(GSM)+Earphone
Mode 4	Adapter+Traffic (WCDMA)
Mode 5	Adapter+(LTE)
Mode 6	USB Copy(EUT with PC) +Earphone+idle

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Mode 2	Adapter+Speaker+Playing+idle
Mode 3	Adapter+Traffic(GSM)+Earphone
Mode 4	Adapter+Traffic (WCDMA)
Mode 5	Adapter+(LTE)
Mode 6	USB Copy(EUT with PC) +Earphone+idle

For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Mode 2	Adapter+Speaker+Playing+idle
Mode 3	Adapter+Traffic(GSM)+Earphone
Mode 4	Adapter+Traffic (WCDMA)
Mode 5	Adapter+(LTE)
Mode 6	USB Copy(EUT with PC) +Earphone+idle

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

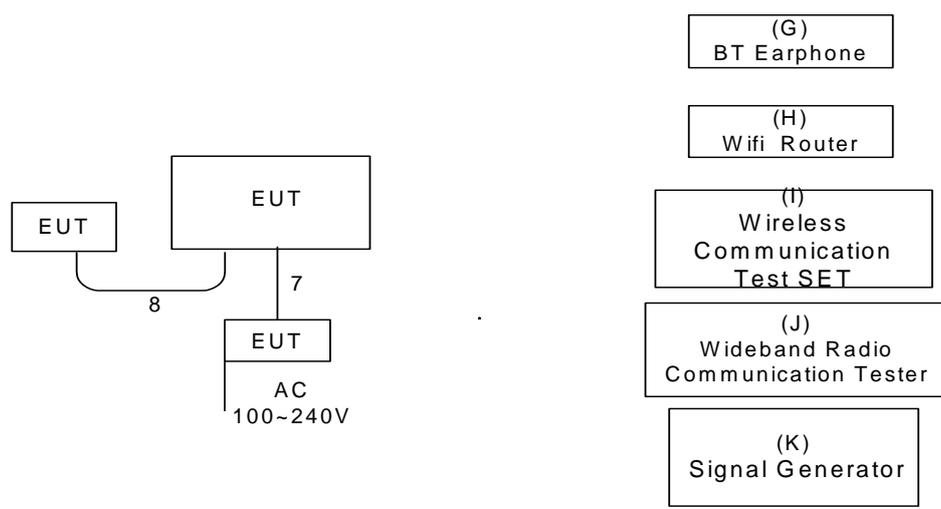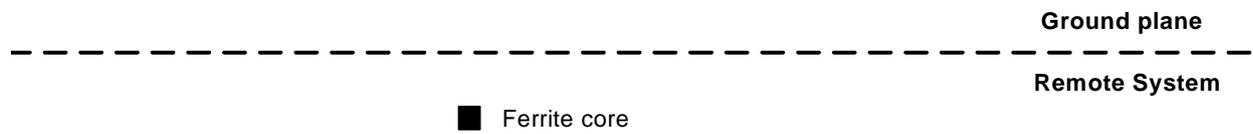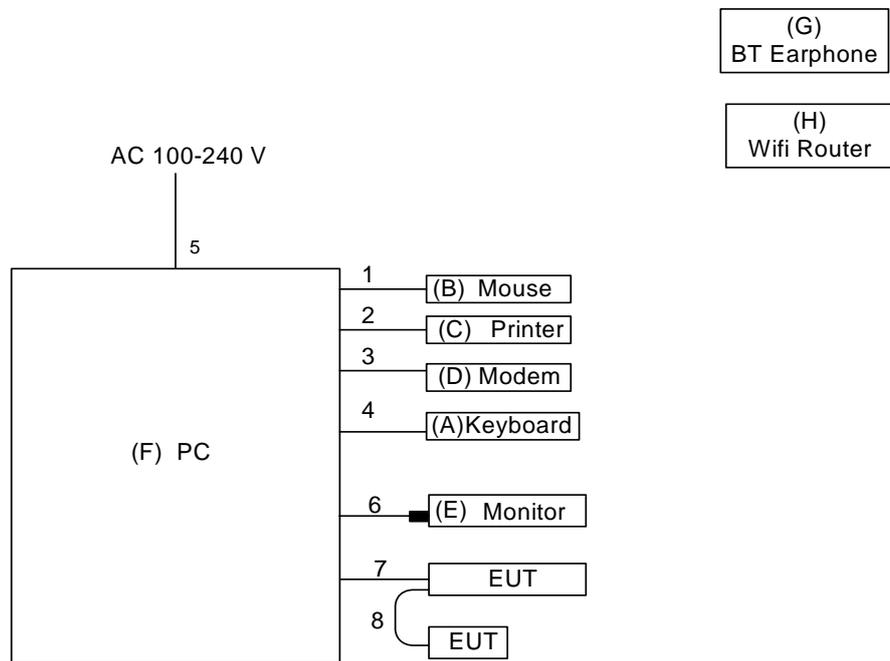

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
A	USB keyboard	hp	SK-2885	DOC	N/A	
B	USB Mouse	hp	SM-2020	DOC	N/A	
C	Printer	SII	DPU-414	DOC	3018507 B	
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131	
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-641 80-6AG-1WNS	
F	PC	Dell 745	DCSM	DOC	G7K832X	
G	BT Earphone	N/A	N/A	N/A	N/A	
H	Router	TP-LINK	TL-WR1041N	N/A	N/A	
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183	
J	Wideband Radio Communication Tester	RS	CMW500	N/A	122125	
K	Signal Generator	Agilent	E4438C	N/A	MY49071316	

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1.0m	USB Cable
8	NO	NO	1.3m	Audio Cable

Note:

(1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

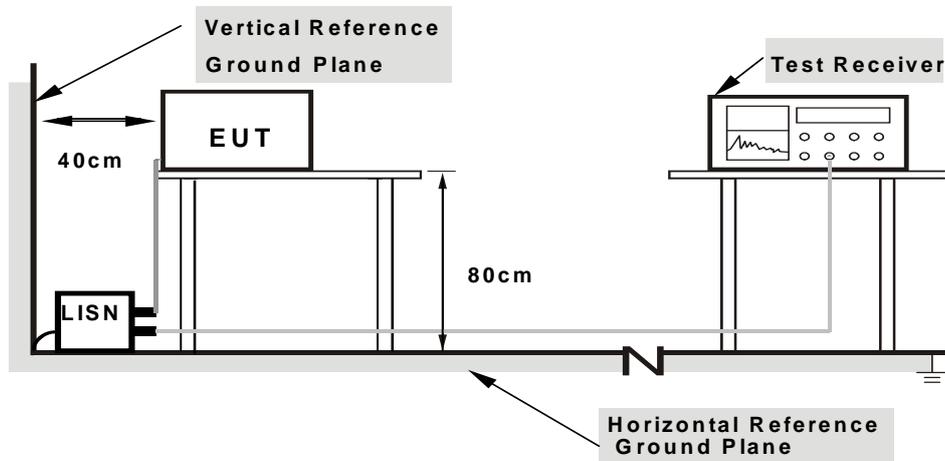

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 25° C Relative Humidity: 51%

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

CISPR 22 or CAN/CSA-CISPR22-10:

Frequency (MHz)	Class A (at 10m)		Class B (at 10m)	
	dBuV/m		dBuV/m	
30 - 230	40		30	
230 - 1000	47		37	

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following: FCC Part 15, Subpart B: 2014,.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting conducted emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak value. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, no additional AVG Mode measurement performed.
- h. F For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

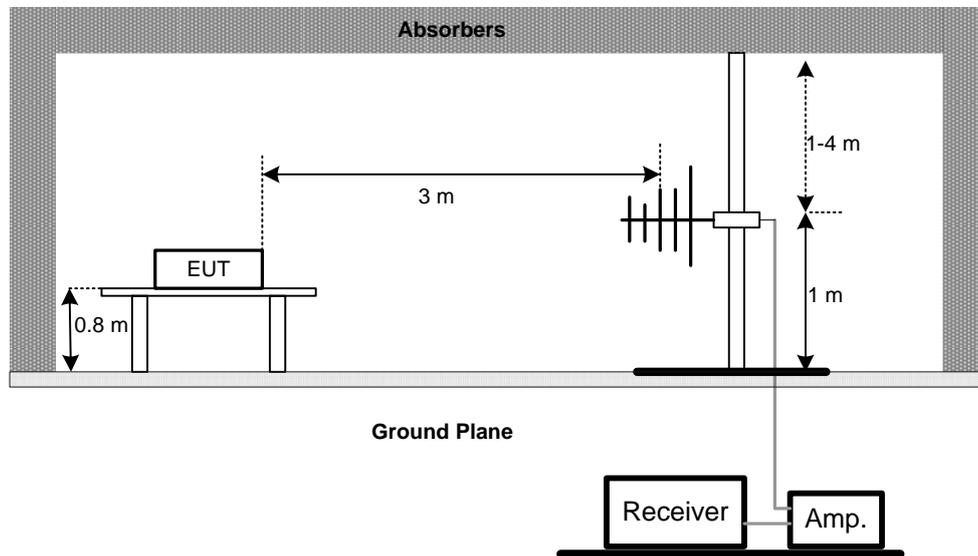

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

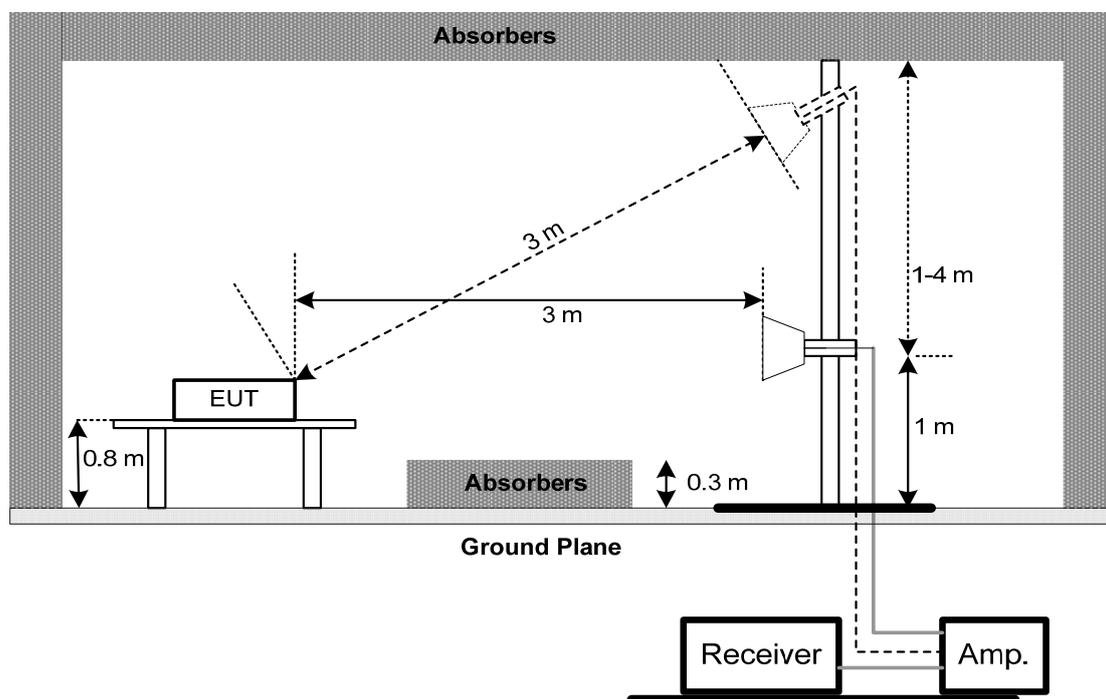

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS (30 TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 25°C Relative Humidity: 60%

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 25°C Relative Humidity: 60%

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

6. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100087	Nov. 22, 2015
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A


Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jul. 09, 2015
2	Pre-Amplifier	Anritsu	MH648A	M92649	Apr. 16, 2016
3	Test Cable	TIMES	LMR-400	12M	May 12, 2016
4	Test Cable	TIMES	LMR-400	3M	May 12, 2016
5	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
6	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jan. 11, 2016
7	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 14, 2016
8	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
9	Microflex Cable	AISI	S104-SMAP-1	10M	May 13, 2016
10	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May 11, 2016
11	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 13, 2015
12	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A
13	Position Control	MF	MF-7802	MF780208159	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of Equipment List is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Line

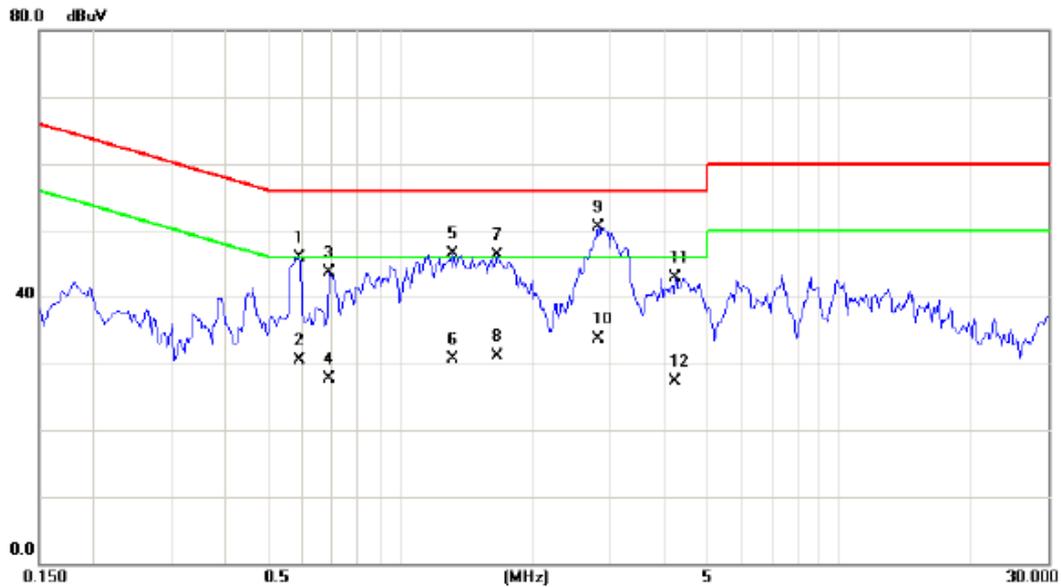

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment	dBuV	dB	Detector	Comment
1		0.5914	36.10	9.86	45.96	56.00	-10.04	QP	
2		0.5914	20.60	9.86	30.46	46.00	-15.54	AVG	
3		0.6891	33.82	9.90	43.72	56.00	-12.28	QP	
4		0.6891	17.80	9.90	27.70	46.00	-18.30	AVG	
5		1.3180	36.44	9.99	46.43	56.00	-9.57	QP	
6		1.3180	20.70	9.99	30.69	46.00	-15.31	AVG	
7		1.6695	36.38	9.90	46.28	56.00	-9.72	QP	
8		1.6695	21.30	9.90	31.20	46.00	-14.80	AVG	
9	*	2.8336	40.62	9.86	50.48	56.00	-5.52	QP	
10		2.8336	23.90	9.86	33.76	46.00	-12.24	AVG	
11		4.2383	33.34	9.65	42.99	56.00	-13.01	QP	
12		4.2383	17.60	9.65	27.25	46.00	-18.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Neutral

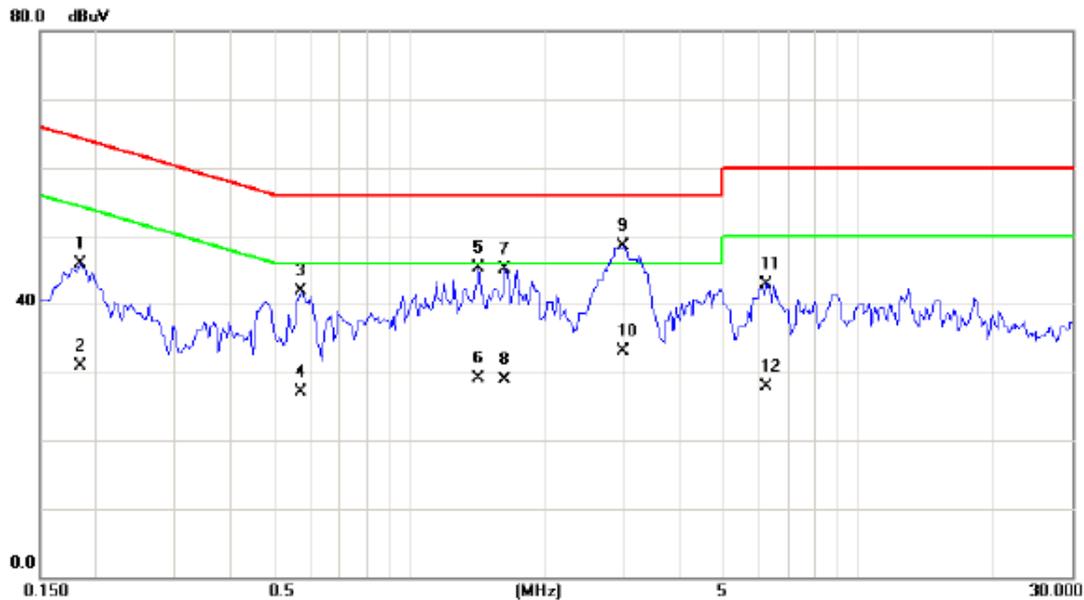

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1852	36.21	9.61	45.82	64.25	-18.43	QP	
2	0.1852	21.30	9.61	30.91	54.25	-23.34	AVG	
3	0.5720	32.28	9.67	41.95	56.00	-14.05	QP	
4	0.5720	17.50	9.67	27.17	46.00	-18.83	AVG	
5	1.4273	35.58	9.82	45.40	56.00	-10.60	QP	
6	1.4273	19.30	9.82	29.12	46.00	-16.88	AVG	
7	1.6305	35.27	9.85	45.12	56.00	-10.88	QP	
8	1.6305	19.10	9.85	28.95	46.00	-17.05	AVG	
9 *	3.0078	38.73	9.80	48.53	56.00	-7.47	QP	
10	3.0078	23.30	9.80	33.10	46.00	-12.90	AVG	
11	6.2461	32.75	10.12	42.87	60.00	-17.13	QP	
12	6.2461	17.80	10.12	27.92	50.00	-22.08	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Unirise+Earphone: QUANCHENG+Battery: SCUD


Line

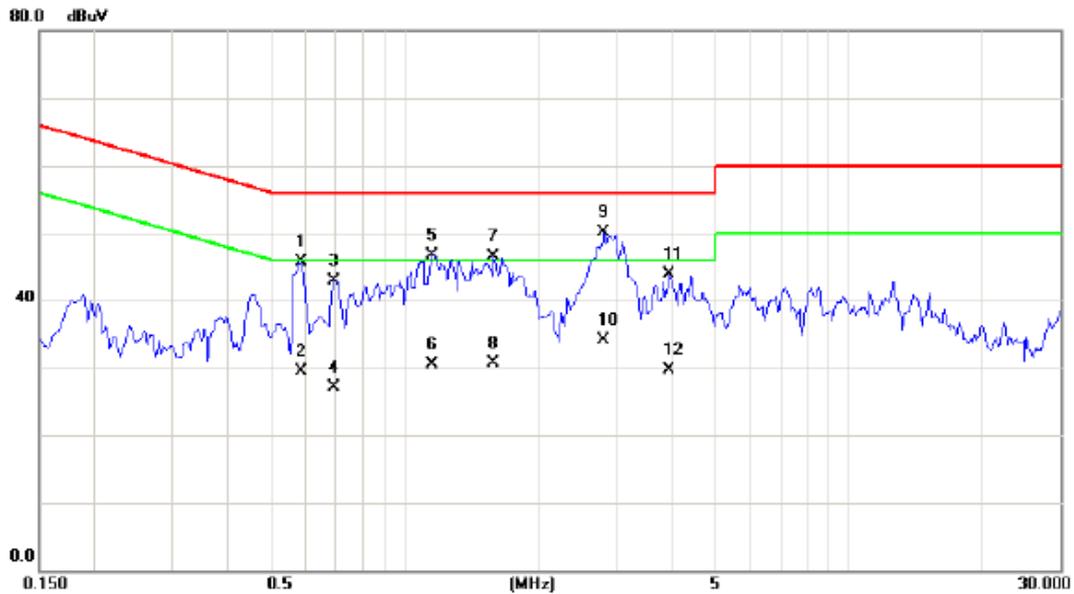

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.5875	35.88	9.85	45.73	56.00	-10.27	QP	
2	0.5875	19.60	9.85	29.45	46.00	-16.55	AVG	
3	0.6930	32.96	9.90	42.86	56.00	-13.14	QP	
4	0.6930	17.30	9.90	27.20	46.00	-18.80	AVG	
5	1.1540	36.74	10.01	46.75	56.00	-9.25	QP	
6	1.1540	20.50	10.01	30.51	46.00	-15.49	AVG	
7	1.5875	36.66	9.91	46.57	56.00	-9.43	QP	
8	1.5875	20.70	9.91	30.61	46.00	-15.39	AVG	
9 *	2.8102	40.17	9.87	50.04	56.00	-5.96	QP	
10	2.8102	24.30	9.87	34.17	46.00	-11.83	AVG	
11	3.9375	34.04	9.87	43.91	56.00	-12.09	QP	
12	3.9375	19.80	9.87	29.67	46.00	-16.33	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Unirise+Earphone: QUANCHENG+Battery: SCUD


Neutral

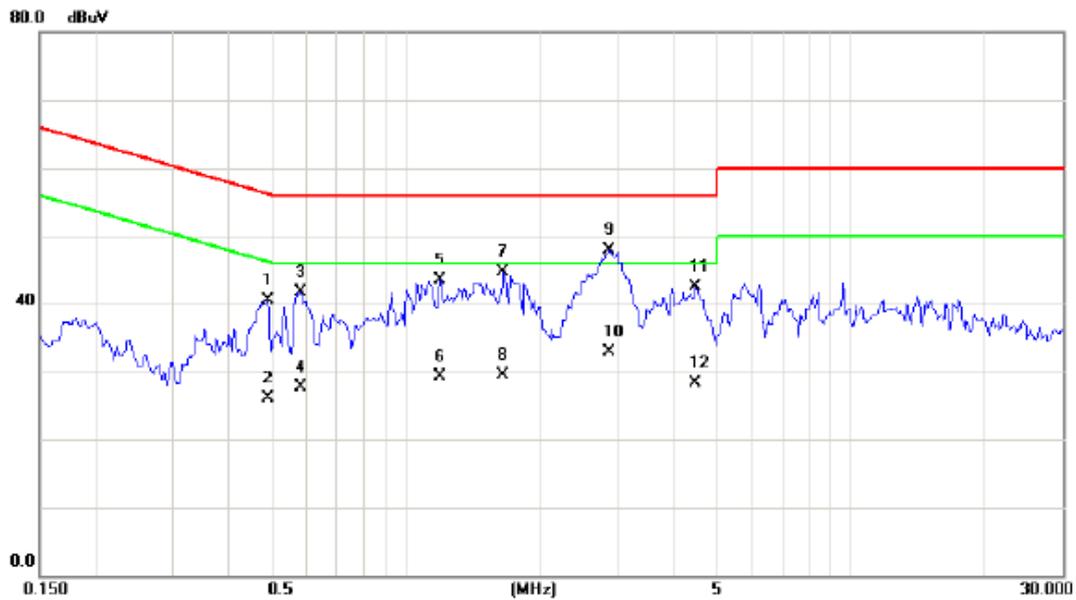

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4898	30.89	9.65	40.54	56.17	-15.63	QP	
2	0.4898	16.40	9.65	26.05	46.17	-20.12	AVG	
3	0.5797	32.02	9.67	41.69	56.00	-14.31	QP	
4	0.5797	18.10	9.67	27.77	46.00	-18.23	AVG	
5	1.1970	33.73	9.80	43.53	56.00	-12.47	QP	
6	1.1970	19.50	9.80	29.30	46.00	-16.70	AVG	
7	1.6540	34.85	9.85	44.70	56.00	-11.30	QP	
8	1.6540	19.60	9.85	29.45	46.00	-16.55	AVG	
9 *	2.8727	38.16	9.82	47.98	56.00	-8.02	QP	
10	2.8727	23.10	9.82	32.92	46.00	-13.08	AVG	
11	4.4961	32.38	10.03	42.41	56.00	-13.59	QP	
12	4.4961	18.30	10.03	28.33	46.00	-17.67	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Connrex+Earphone: Lianchuang+Battery: SCUD


Line

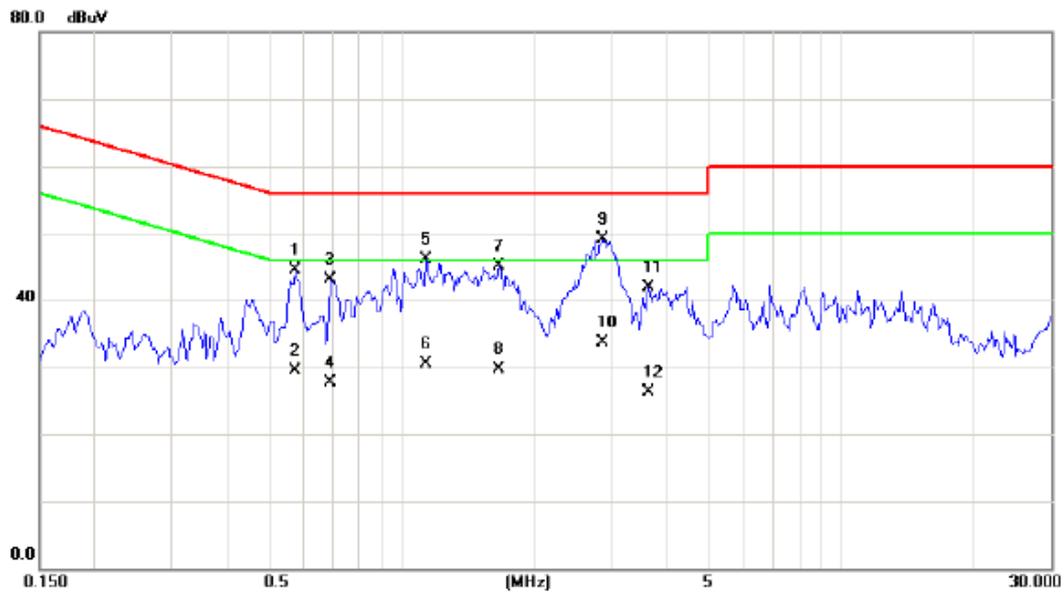

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5720	34.65	9.84	44.49	56.00	-11.51	QP	
2		0.5720	19.60	9.84	29.44	46.00	-16.56	AVG	
3		0.6891	33.12	9.90	43.02	56.00	-12.98	QP	
4		0.6891	17.80	9.90	27.70	46.00	-18.30	AVG	
5		1.1383	36.07	10.01	46.08	56.00	-9.92	QP	
6		1.1383	20.40	10.01	30.41	46.00	-15.59	AVG	
7		1.6656	35.23	9.90	45.13	56.00	-10.87	QP	
8		1.6656	19.80	9.90	29.70	46.00	-16.30	AVG	
9	*	2.8804	39.29	9.85	49.14	56.00	-6.86	QP	
10		2.8804	23.80	9.85	33.65	46.00	-12.35	AVG	
11		3.6445	31.97	9.85	41.82	56.00	-14.18	QP	
12		3.6445	16.50	9.85	26.35	46.00	-19.65	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Connrex+Earphone: Lianchuang+Battery: SCUD


Neutral

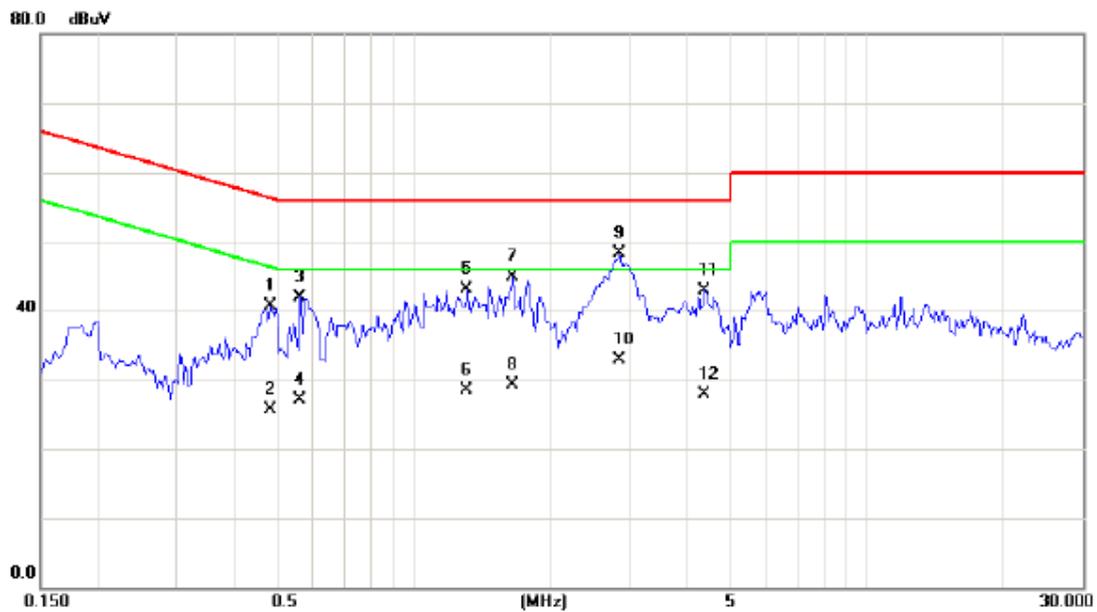

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4820	30.97	9.65	40.62	56.30	-15.68	QP	
2		0.4820	16.10	9.65	25.75	46.30	-20.55	AVG	
3		0.5641	32.24	9.67	41.91	56.00	-14.09	QP	
4		0.5641	17.50	9.67	27.17	46.00	-18.83	AVG	
5		1.3141	33.21	9.81	43.02	56.00	-12.98	QP	
6		1.3141	18.60	9.81	28.41	46.00	-17.59	AVG	
7		1.6540	35.05	9.85	44.90	56.00	-11.10	QP	
8		1.6540	19.40	9.85	29.25	46.00	-16.75	AVG	
9	*	2.8453	38.47	9.82	48.29	56.00	-7.71	QP	
10		2.8453	23.10	9.82	32.92	46.00	-13.08	AVG	
11		4.4063	32.94	10.03	42.97	56.00	-13.03	QP	
12		4.4063	17.80	10.03	27.83	46.00	-18.17	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Honglin+Earphone: MERRY+Battery: SCUD

Line

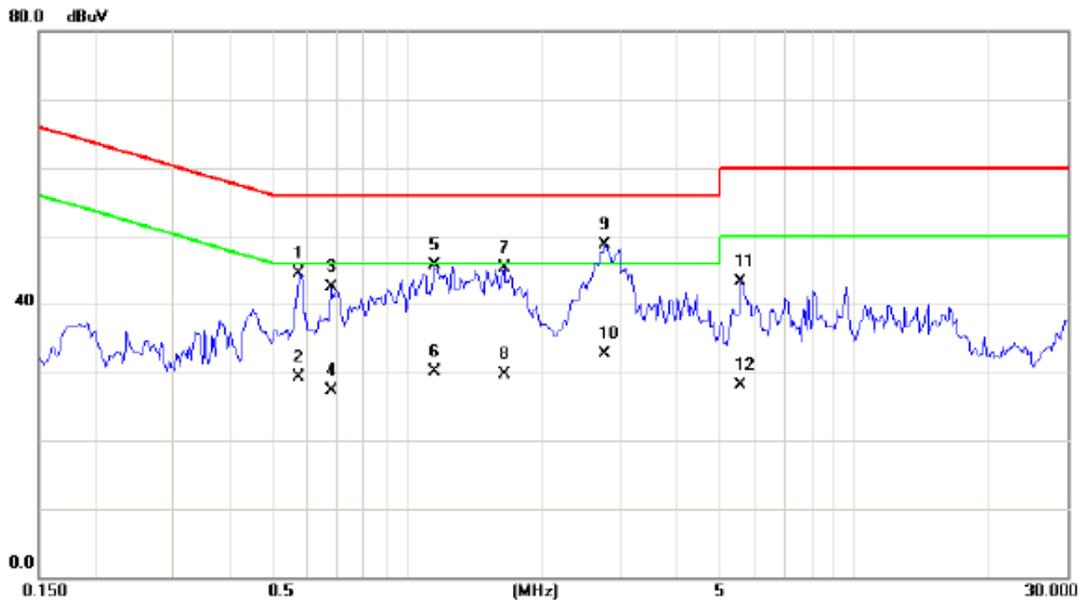

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5757	34.75	9.85	44.60	56.00	-11.40	QP	
2		0.5757	19.40	9.85	29.25	46.00	-16.75	AVG	
3		0.6773	32.66	9.89	42.55	56.00	-13.45	QP	
4		0.6773	17.50	9.89	27.39	46.00	-18.61	AVG	
5		1.1500	35.65	10.01	45.66	56.00	-10.34	QP	
6		1.1500	20.10	10.01	30.11	46.00	-15.89	AVG	
7		1.6460	35.38	9.90	45.28	56.00	-10.72	QP	
8		1.6460	19.80	9.90	29.70	46.00	-16.30	AVG	
9	*	2.7710	38.88	9.87	48.75	56.00	-7.25	QP	
10		2.7710	22.90	9.87	32.77	46.00	-13.23	AVG	
11		5.5898	34.04	9.24	43.28	60.00	-16.72	QP	
12		5.5898	18.90	9.24	28.14	50.00	-21.86	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Honglin+Earphone: MERRY+Battery: SCUD


Neutral



No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4742	30.99	9.64	40.63	56.44	-15.81	QP	
2	0.4742	16.40	9.64	26.04	46.44	-20.40	AVG	
3	0.5680	31.87	9.67	41.54	56.00	-14.46	QP	
4	0.5680	16.90	9.67	26.57	46.00	-19.43	AVG	
5	1.1266	34.82	9.80	44.62	56.00	-11.38	QP	
6	1.1266	19.30	9.80	29.10	46.00	-16.90	AVG	
7	1.7203	34.23	9.86	44.09	56.00	-11.91	QP	
8	1.7203	18.60	9.86	28.46	46.00	-17.54	AVG	
9 *	2.8102	37.34	9.83	47.17	56.00	-8.83	QP	
10	2.8102	22.40	9.83	32.23	46.00	-13.77	AVG	
11	5.7538	33.53	10.12	43.65	60.00	-16.35	QP	
12	5.7538	18.20	10.12	28.32	50.00	-21.68	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai+Earphone: GoerTek Inc (white)+Battery: SCUD


Line

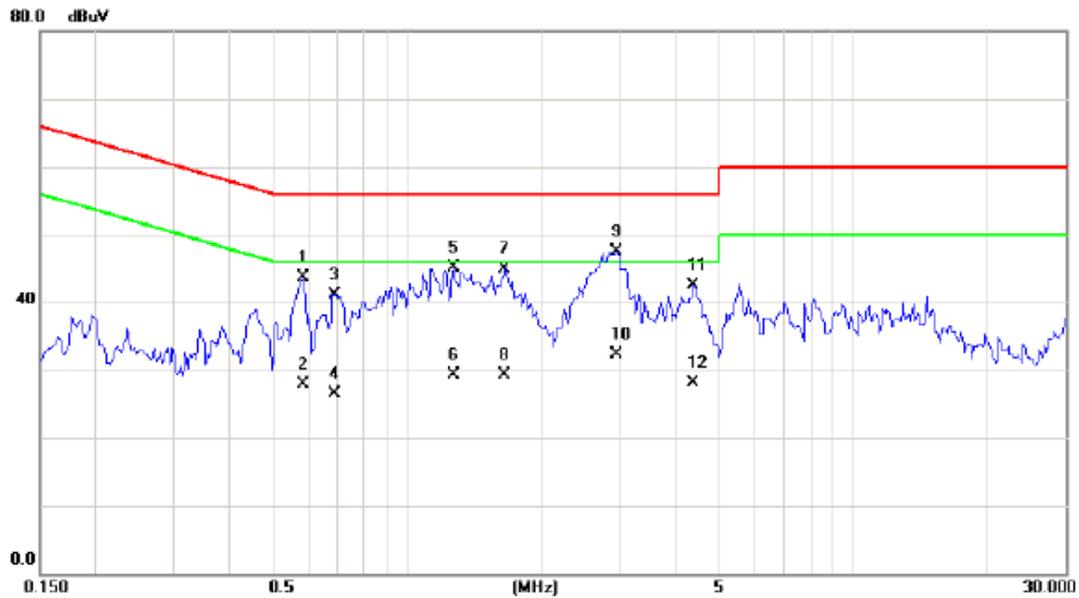

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.5875	33.77	9.85	43.62	56.00	-12.38	QP	
2	0.5875	18.10	9.85	27.95	46.00	-18.05	AVG	
3	0.6891	31.21	9.90	41.11	56.00	-14.89	QP	
4	0.6891	16.70	9.90	26.60	46.00	-19.40	AVG	
5	1.2711	35.16	10.00	45.16	56.00	-10.84	QP	
6	1.2711	19.30	10.00	29.30	46.00	-16.70	AVG	
7	1.6617	34.99	9.90	44.89	56.00	-11.11	QP	
8	1.6617	19.50	9.90	29.40	46.00	-16.60	AVG	
9 *	2.9470	37.73	9.83	47.56	56.00	-8.44	QP	
10	2.9470	22.40	9.83	32.23	46.00	-13.77	AVG	
11	4.4063	33.09	9.49	42.58	56.00	-13.42	QP	
12	4.4063	18.70	9.49	28.19	46.00	-17.81	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai+Earphone: GoerTek Inc (white)+Battery: SCUD


Neutral

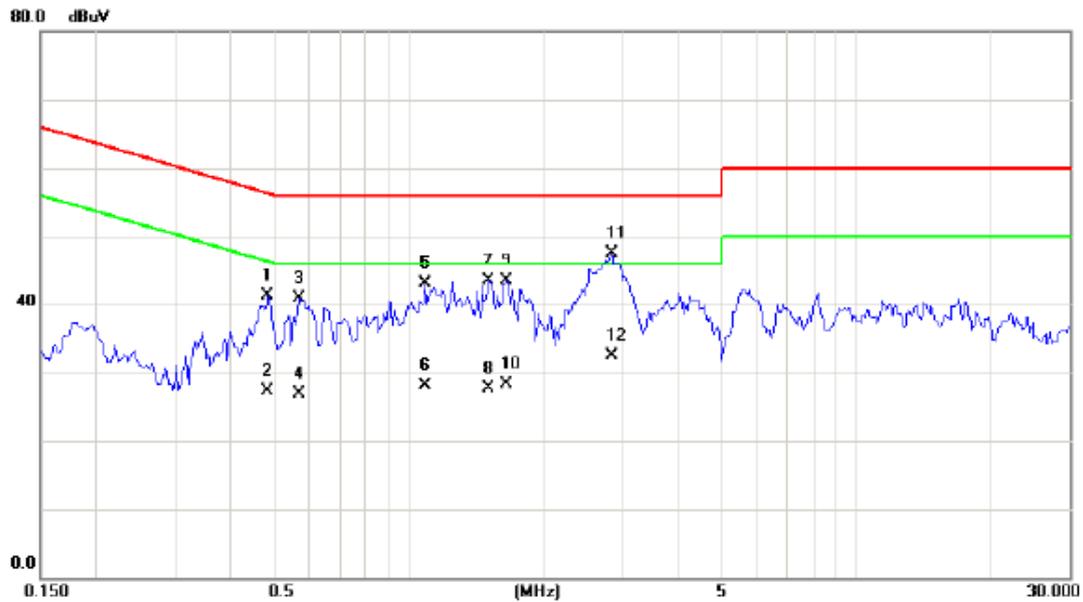

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4860	31.62	9.65	41.27	56.24	-14.97	QP	
2		0.4860	17.60	9.65	27.25	46.24	-18.99	AVG	
3		0.5680	31.30	9.67	40.97	56.00	-15.03	QP	
4		0.5680	17.20	9.67	26.87	46.00	-19.13	AVG	
5		1.0914	33.33	9.79	43.12	56.00	-12.88	QP	
6		1.0914	18.30	9.79	28.09	46.00	-17.91	AVG	
7		1.5054	33.72	9.82	43.54	56.00	-12.46	QP	
8		1.5054	17.90	9.82	27.72	46.00	-18.28	AVG	
9		1.6617	33.71	9.85	43.56	56.00	-12.44	QP	
10		1.6617	18.40	9.85	28.25	46.00	-17.75	AVG	
11	*	2.8413	37.73	9.82	47.55	56.00	-8.45	QP	
12		2.8413	22.60	9.82	32.42	46.00	-13.58	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: HK+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Line

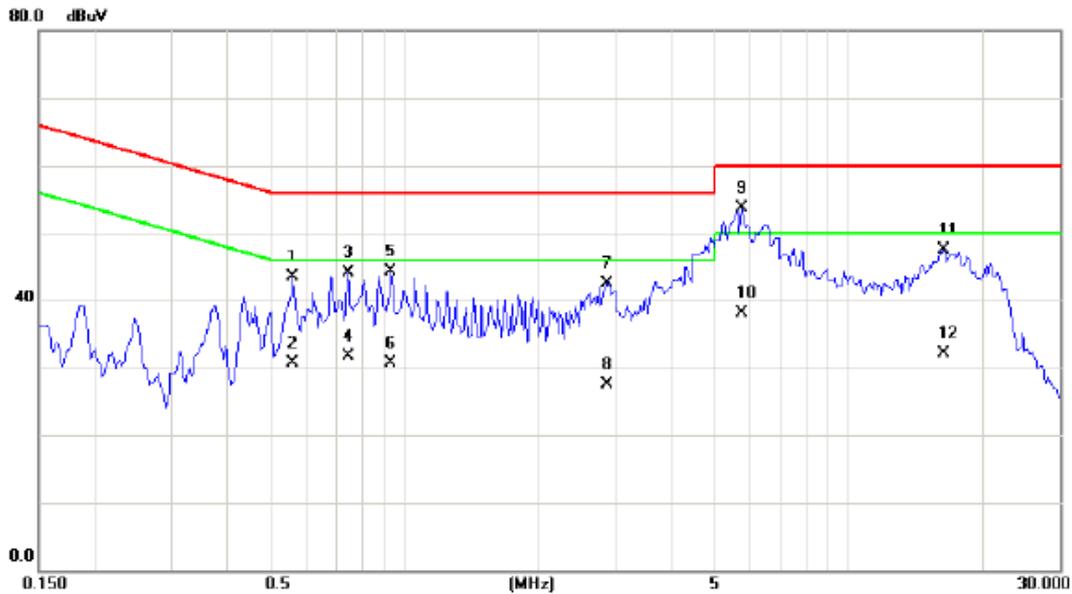

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5602	33.75	9.84	43.59	56.00	-12.41	QP	
2		0.5602	20.80	9.84	30.64	46.00	-15.36	AVG	
3		0.7477	34.18	9.91	44.09	56.00	-11.91	QP	
4		0.7477	21.80	9.91	31.71	46.00	-14.29	AVG	
5		0.9352	34.42	9.96	44.38	56.00	-11.62	QP	
6		0.9352	20.80	9.96	30.76	46.00	-15.24	AVG	
7		2.8844	32.74	9.85	42.59	56.00	-13.41	QP	
8		2.8844	17.60	9.85	27.45	46.00	-18.55	AVG	
9	*	5.7578	44.31	9.33	53.64	60.00	-6.36	QP	
10		5.7578	28.70	9.33	38.03	50.00	-11.97	AVG	
11		16.4220	37.12	10.31	47.43	60.00	-12.57	QP	
12		16.4220	21.80	10.31	32.11	50.00	-17.89	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter:HK+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Neutral

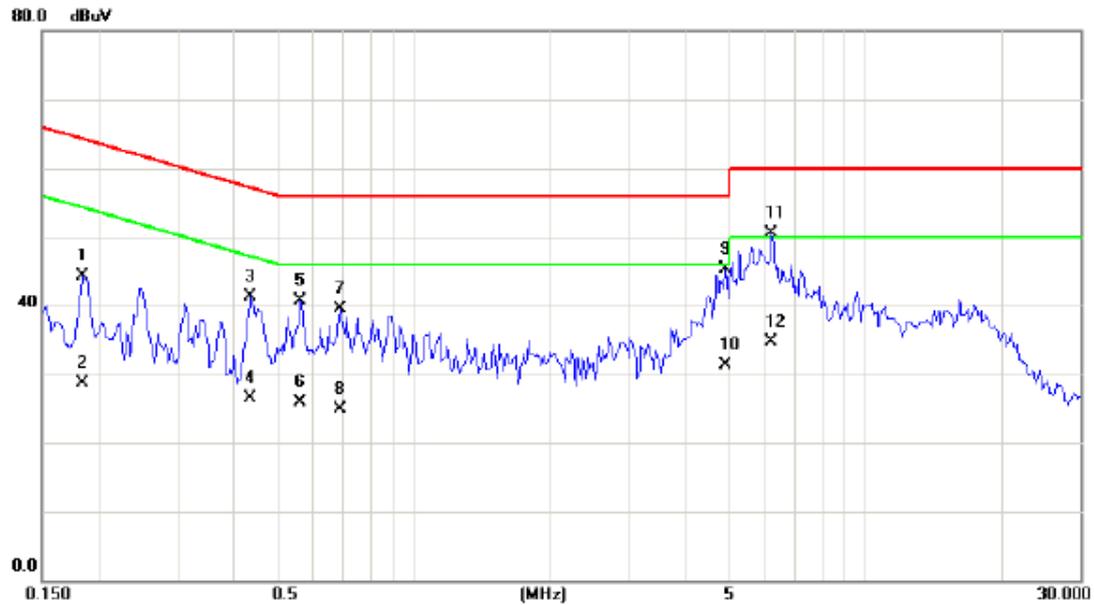

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1852	34.72	9.61	44.33	64.25	-19.92	QP	
2		0.1852	19.10	9.61	28.71	54.25	-25.54	AVG	
3		0.4352	31.62	9.64	41.26	57.15	-15.89	QP	
4		0.4352	16.80	9.64	26.44	47.15	-20.71	AVG	
5		0.5641	31.08	9.67	40.75	56.00	-15.25	QP	
6		0.5641	16.30	9.67	25.97	46.00	-20.03	AVG	
7		0.6891	29.76	9.69	39.45	56.00	-16.55	QP	
8		0.6891	15.20	9.69	24.89	46.00	-21.11	AVG	
9		4.9063	35.17	10.08	45.25	56.00	-10.75	QP	
10		4.9063	21.20	10.08	31.28	46.00	-14.72	AVG	
11	*	6.2108	40.37	10.12	50.49	60.00	-9.51	QP	
12		6.2108	24.50	10.12	34.62	50.00	-15.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD(EU Plug)+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Line

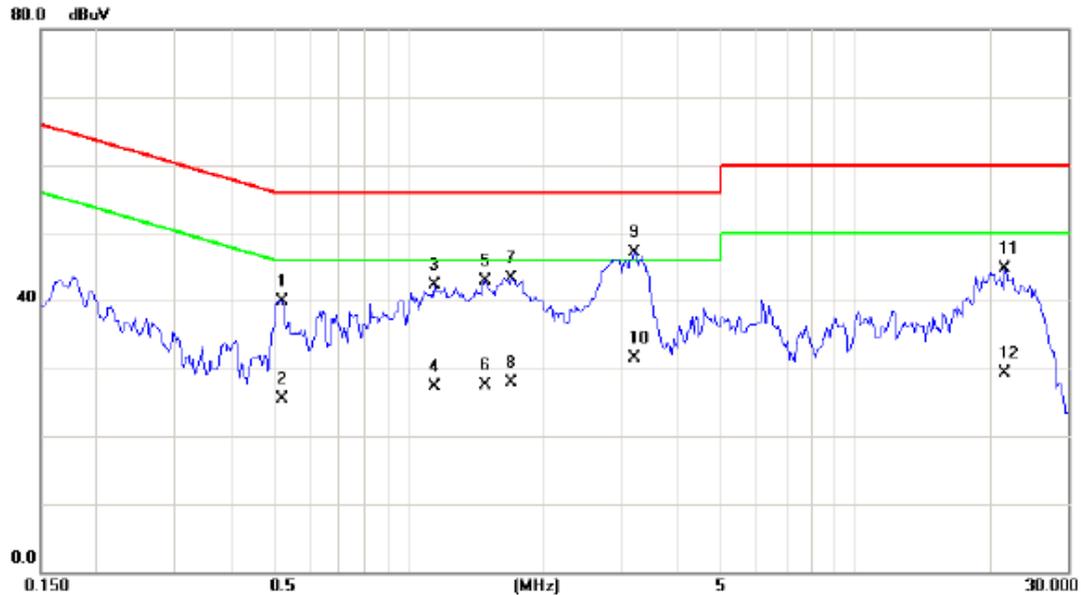

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5211	30.06	9.82	39.88	56.00	-16.12	QP	
2		0.5211	15.70	9.82	25.52	46.00	-20.48	AVG	
3		1.1461	32.21	10.01	42.22	56.00	-13.78	QP	
4		1.1461	17.30	10.01	27.31	46.00	-18.69	AVG	
5		1.4860	32.89	9.93	42.82	56.00	-13.18	QP	
6		1.4860	17.50	9.93	27.43	46.00	-18.57	AVG	
7		1.7008	33.37	9.89	43.26	56.00	-12.74	QP	
8		1.7008	18.10	9.89	27.99	46.00	-18.01	AVG	
9	*	3.2227	37.33	9.83	47.16	56.00	-8.84	QP	
10		3.2227	21.70	9.83	31.53	46.00	-14.47	AVG	
11		21.6641	34.30	10.40	44.70	60.00	-15.30	QP	
12		21.6641	18.90	10.40	29.30	50.00	-20.70	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD(EU Plug)+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Neutral

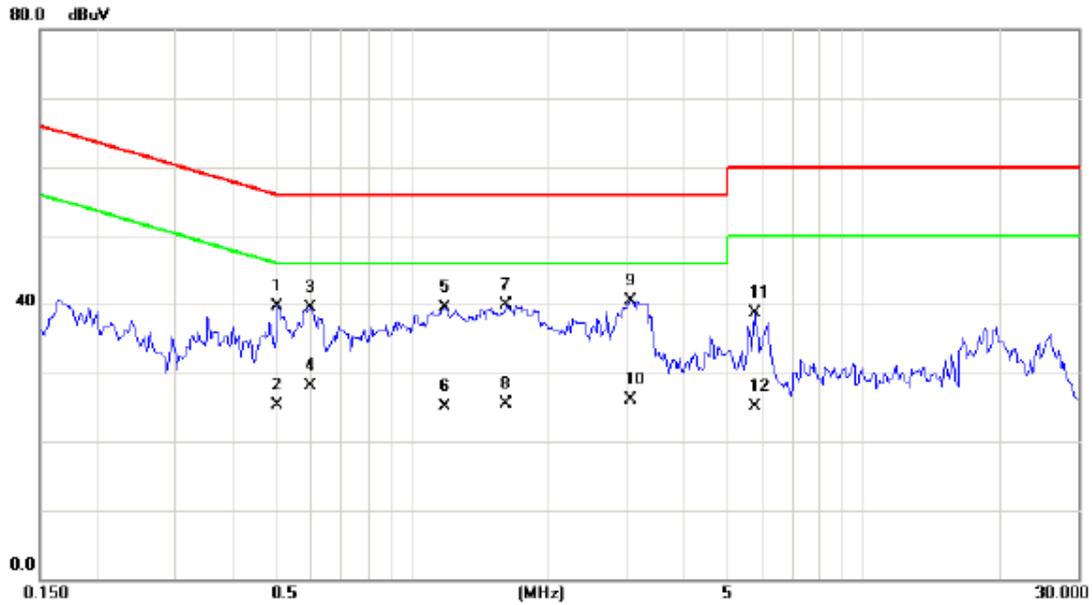

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.5055	30.02	9.65	39.67	56.00	-16.33	QP	
2	0.5055	15.60	9.65	25.25	46.00	-20.75	AVG	
3	0.5992	29.84	9.68	39.52	56.00	-16.48	QP	
4	0.5992	18.50	9.68	28.18	46.00	-17.82	AVG	
5	1.1891	29.74	9.80	39.54	56.00	-16.46	QP	
6	1.1891	15.40	9.80	25.20	46.00	-20.80	AVG	
7	1.6266	30.01	9.85	39.86	56.00	-16.14	QP	
8	1.6266	15.60	9.85	25.45	46.00	-20.55	AVG	
9 *	3.0470	30.66	9.81	40.47	56.00	-15.53	QP	
10	3.0470	16.30	9.81	26.11	46.00	-19.89	AVG	
11	5.7500	28.67	10.12	38.79	60.00	-21.21	QP	
12	5.7500	14.90	10.12	25.02	50.00	-24.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: HK(EU Plug)+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Line

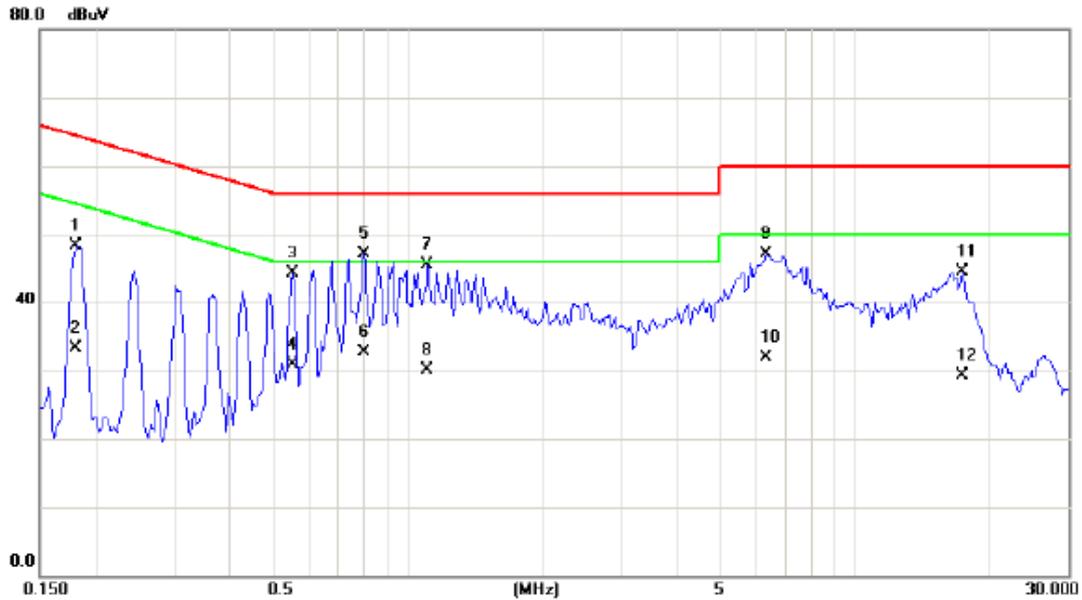

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1812	38.63	9.70	48.33	64.43	-16.10	QP	
2	0.1812	23.60	9.70	33.30	54.43	-21.13	AVG	
3	0.5523	34.41	9.84	44.25	56.00	-11.75	QP	
4	0.5523	21.10	9.84	30.94	46.00	-15.06	AVG	
5 *	0.7984	37.21	9.93	47.14	56.00	-8.86	QP	
6	0.7984	22.80	9.93	32.73	46.00	-13.27	AVG	
7	1.1110	35.49	10.00	45.49	56.00	-10.51	QP	
8	1.1110	20.10	10.00	30.10	46.00	-15.90	AVG	
9	6.3281	37.49	9.63	47.12	60.00	-12.88	QP	
10	6.3281	22.30	9.63	31.93	50.00	-18.07	AVG	
11	17.3280	34.22	10.33	44.55	60.00	-15.45	QP	
12	17.3280	18.90	10.33	29.23	50.00	-20.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: HK(EU Plug)+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Neutral

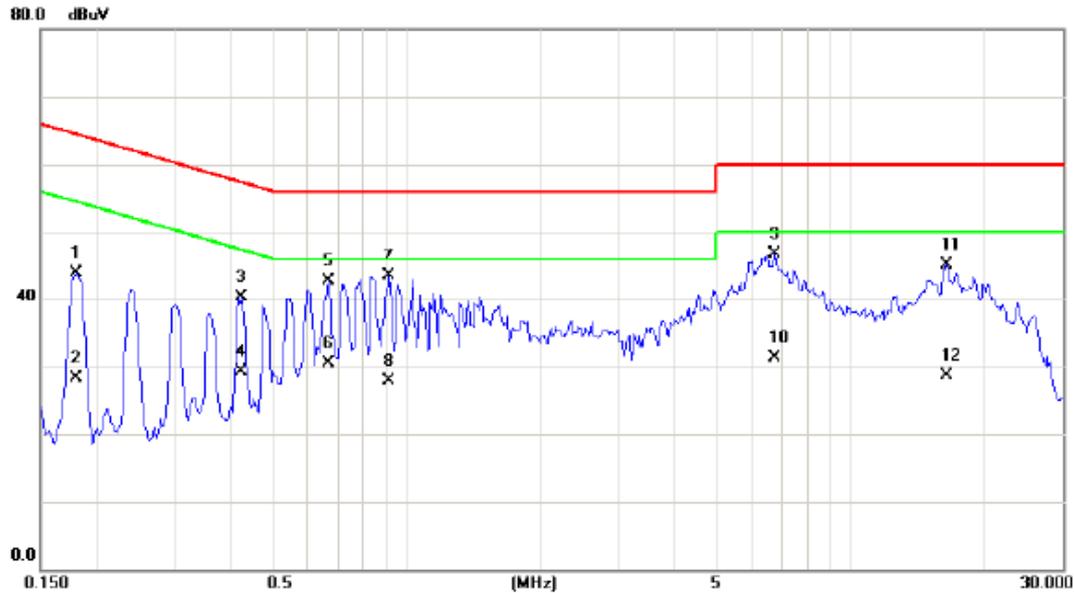

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1812	34.36	9.60	43.96	64.43	-20.47	QP	
2		0.1812	18.70	9.60	28.30	54.43	-26.13	AVG	
3		0.4273	30.70	9.64	40.34	57.31	-16.97	QP	
4		0.4273	19.70	9.64	29.34	47.31	-17.97	AVG	
5		0.6695	32.93	9.69	42.62	56.00	-13.38	QP	
6		0.6695	20.90	9.69	30.59	46.00	-15.41	AVG	
7	*	0.9156	33.66	9.75	43.41	56.00	-12.59	QP	
8		0.9156	18.20	9.75	27.95	46.00	-18.05	AVG	
9		6.7383	36.58	10.14	46.72	60.00	-13.28	QP	
10		6.7383	21.10	10.14	31.24	50.00	-18.76	AVG	
11		16.4414	34.90	10.27	45.17	60.00	-14.83	QP	
12		16.4414	18.40	10.27	28.67	50.00	-21.33	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: Sunwoda


Line

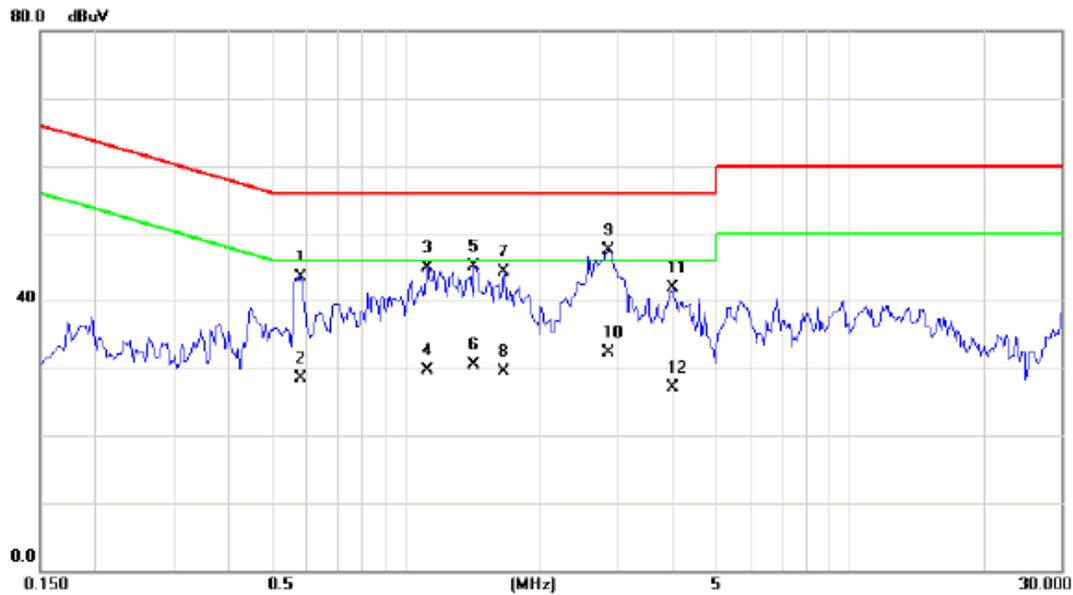

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.5797	33.61	9.85	43.46	56.00	-12.54	QP	
2		0.5797	18.60	9.85	28.45	46.00	-17.55	AVG	
3		1.1227	34.92	10.00	44.92	56.00	-11.08	QP	
4		1.1227	19.70	10.00	29.70	46.00	-16.30	AVG	
5		1.4312	35.19	9.95	45.14	56.00	-10.86	QP	
6		1.4312	20.50	9.95	30.45	46.00	-15.55	AVG	
7		1.6695	34.50	9.90	44.40	56.00	-11.60	QP	
8		1.6695	19.60	9.90	29.50	46.00	-16.50	AVG	
9	*	2.8844	37.68	9.85	47.53	56.00	-8.47	QP	
10		2.8844	22.40	9.85	32.25	46.00	-13.75	AVG	
11		4.0038	31.99	9.87	41.86	56.00	-14.14	QP	
12		4.0038	17.30	9.87	27.17	46.00	-18.83	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: Sunwoda


Neutral

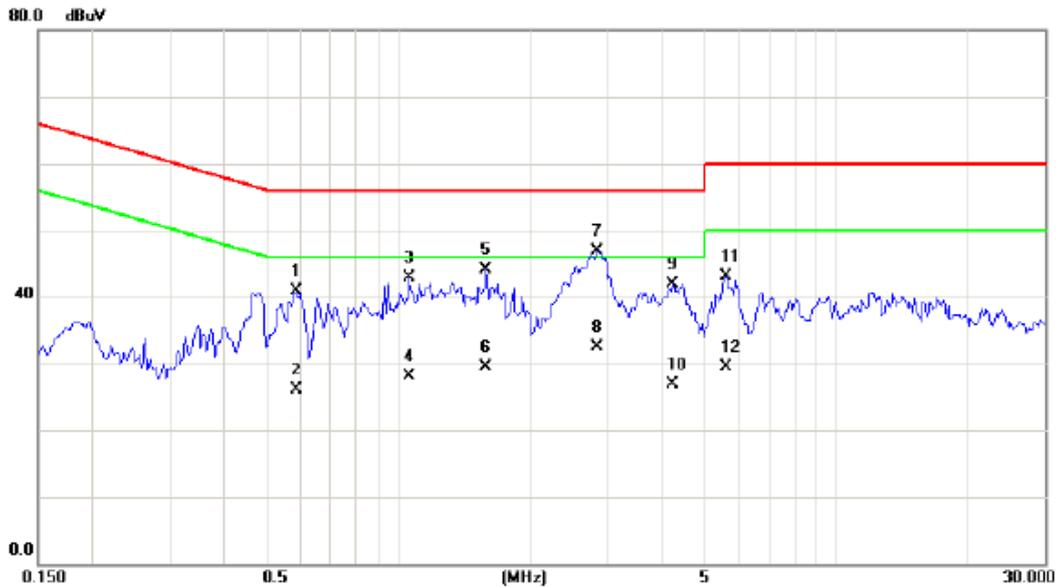

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5836	31.22	9.67	40.89	56.00	-15.11	QP	
2		0.5836	16.50	9.67	26.17	46.00	-19.83	AVG	
3		1.0562	33.17	9.79	42.96	56.00	-13.04	QP	
4		1.0562	18.40	9.79	28.19	46.00	-17.81	AVG	
5		1.5875	34.23	9.84	44.07	56.00	-11.93	QP	
6		1.5875	19.70	9.84	29.54	46.00	-16.46	AVG	
7	*	2.8413	37.04	9.82	46.86	56.00	-9.14	QP	
8		2.8413	22.70	9.82	32.52	46.00	-13.48	AVG	
9		4.2266	31.88	10.01	41.89	56.00	-14.11	QP	
10		4.2266	16.80	10.01	26.81	46.00	-19.19	AVG	
11		5.6016	33.07	10.12	43.19	60.00	-16.81	QP	
12		5.6016	19.40	10.12	29.52	50.00	-20.48	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Playing+idle
Note:	Adapter: BYD+USB Cable: Pang Ngai +Battery: SCUD


Line

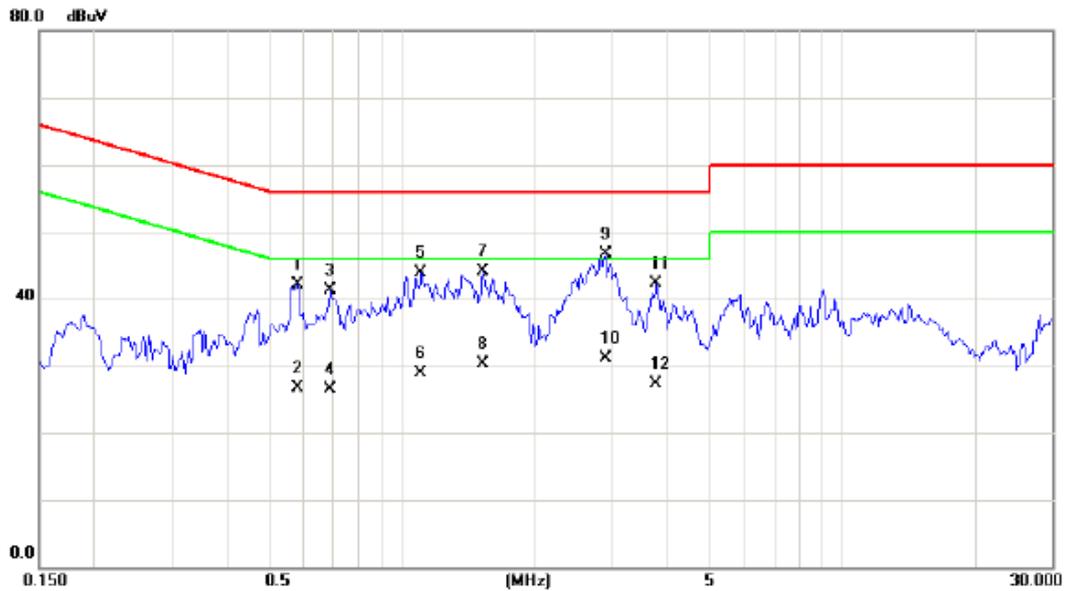

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.5797	32.34	9.85	42.19	56.00	-13.81	QP	
2	0.5797	16.90	9.85	26.75	46.00	-19.25	AVG	
3	0.6891	31.44	9.90	41.34	56.00	-14.66	QP	
4	0.6891	16.70	9.90	26.60	46.00	-19.40	AVG	
5	1.1110	33.90	10.00	43.90	56.00	-12.10	QP	
6	1.1110	18.90	10.00	28.90	46.00	-17.10	AVG	
7	1.5290	34.18	9.92	44.10	56.00	-11.90	QP	
8	1.5290	20.40	9.92	30.32	46.00	-15.68	AVG	
9 *	2.9000	36.95	9.84	46.79	56.00	-9.21	QP	
10	2.9000	21.30	9.84	31.14	46.00	-14.86	AVG	
11	3.7813	32.42	9.86	42.28	56.00	-13.72	QP	
12	3.7813	17.40	9.86	27.26	46.00	-18.74	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Playing+idle
Note:	Adapter: BYD+USB Cable: Pang Ngai +Battery: SCUD


Neutral

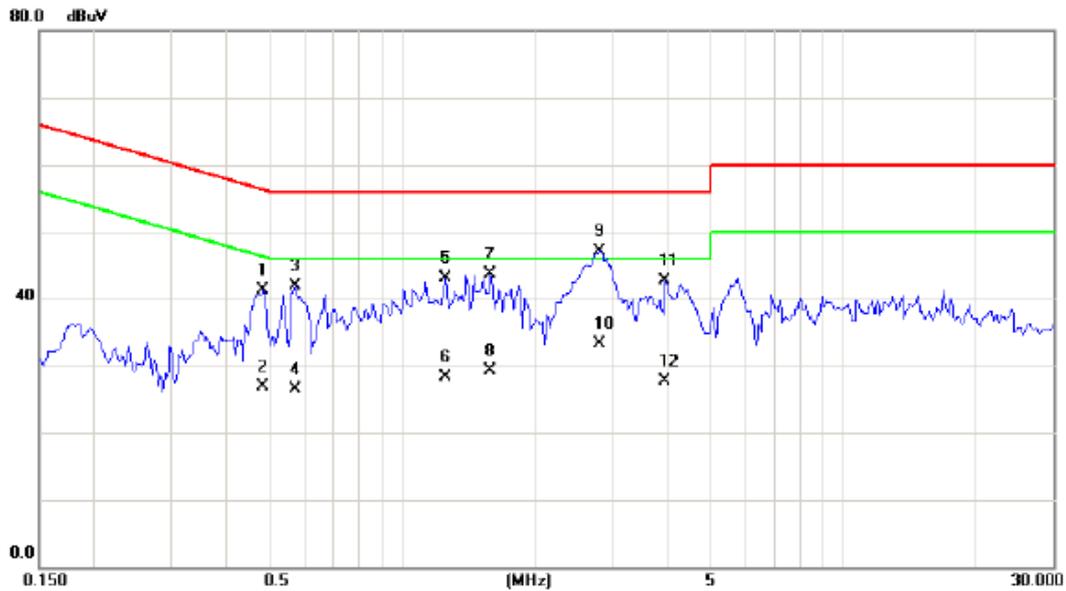

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4860	31.64	9.65	41.29	56.24	-14.95	QP	
2		0.4860	17.30	9.65	26.95	46.24	-19.29	AVG	
3		0.5718	32.16	9.67	41.83	56.00	-14.17	QP	
4		0.5718	16.80	9.67	26.47	46.00	-19.53	AVG	
5		1.2554	33.26	9.81	43.07	56.00	-12.93	QP	
6		1.2554	18.50	9.81	28.31	46.00	-17.69	AVG	
7		1.5914	33.84	9.84	43.68	56.00	-12.32	QP	
8		1.5914	19.40	9.84	29.24	46.00	-16.76	AVG	
9	*	2.8023	37.26	9.83	47.09	56.00	-8.91	QP	
10		2.8023	23.50	9.83	33.33	46.00	-12.67	AVG	
11		3.9610	32.70	9.97	42.67	56.00	-13.33	QP	
12		3.9610	17.80	9.97	27.77	46.00	-18.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic(GSM)+Earphone
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Line

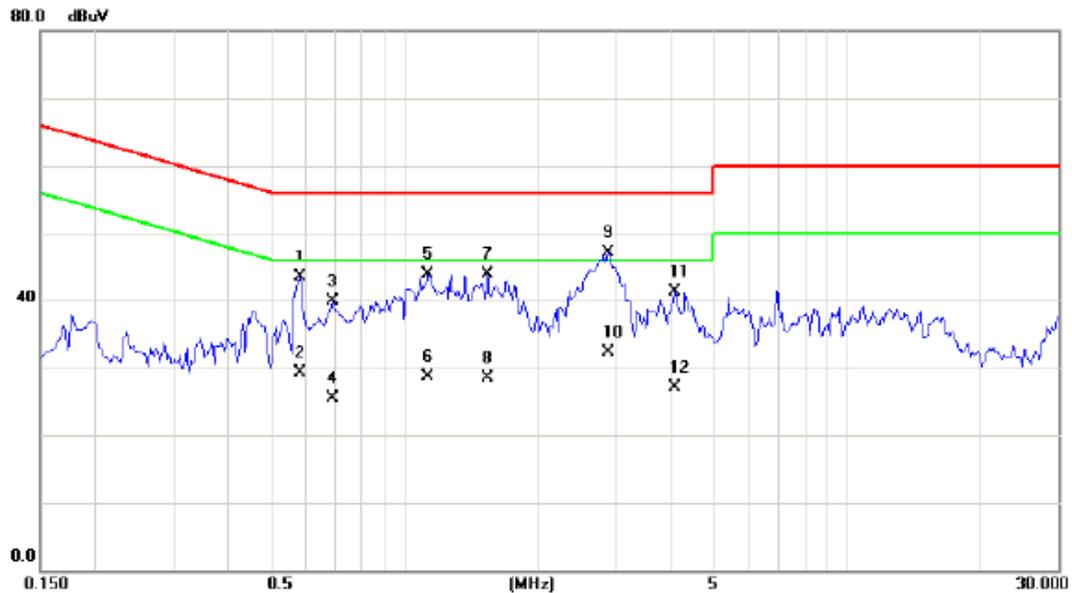

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5796	33.61	9.85	43.46	56.00	-12.54	QP	
2		0.5796	19.40	9.85	29.25	46.00	-16.75	AVG	
3		0.6890	29.98	9.90	39.88	56.00	-16.12	QP	
4		0.6890	15.70	9.90	25.60	46.00	-20.40	AVG	
5		1.1304	33.80	10.01	43.81	56.00	-12.19	QP	
6		1.1304	18.60	10.01	28.61	46.00	-17.39	AVG	
7		1.5406	33.91	9.91	43.82	56.00	-12.18	QP	
8		1.5406	18.50	9.91	28.41	46.00	-17.59	AVG	
9	*	2.8921	37.34	9.84	47.18	56.00	-8.82	QP	
10		2.8921	22.40	9.84	32.24	46.00	-13.76	AVG	
11		4.0781	31.57	9.80	41.37	56.00	-14.63	QP	
12		4.0781	17.30	9.80	27.10	46.00	-18.90	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic(GSM)+Earphone
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Neutral

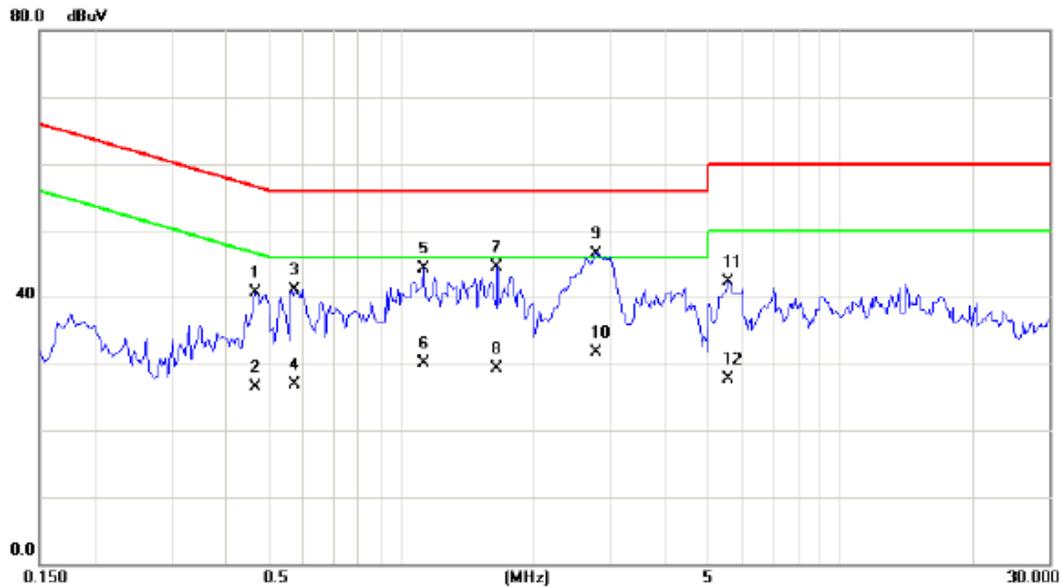

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4664	31.03	9.64	40.67	56.58	-15.91	QP	
2		0.4664	16.80	9.64	26.44	46.58	-20.14	AVG	
3		0.5720	31.47	9.67	41.14	56.00	-14.86	QP	
4		0.5720	17.30	9.67	26.97	46.00	-19.03	AVG	
5		1.1266	34.43	9.80	44.23	56.00	-11.77	QP	
6		1.1266	20.40	9.80	30.20	46.00	-15.80	AVG	
7		1.6578	34.75	9.85	44.60	56.00	-11.40	QP	
8		1.6578	19.50	9.85	29.35	46.00	-16.65	AVG	
9	*	2.7867	36.65	9.82	46.47	56.00	-9.53	QP	
10		2.7867	21.80	9.82	31.62	46.00	-14.38	AVG	
11		5.5898	32.19	10.12	42.31	60.00	-17.69	QP	
12		5.5898	17.50	10.12	27.62	50.00	-22.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: BYD+USB Cable: Pang Ngai +Battery: SCUD


Line

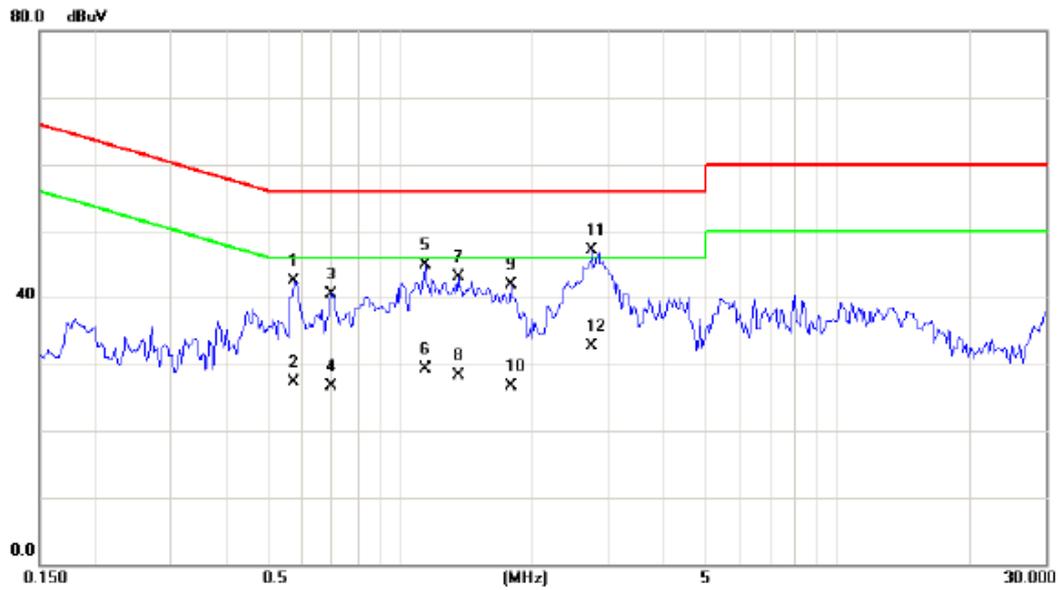

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5720	32.65	9.84	42.49	56.00	-13.51	QP	
2		0.5720	17.50	9.84	27.34	46.00	-18.66	AVG	
3		0.7007	30.56	9.90	40.46	56.00	-15.54	QP	
4		0.7007	16.90	9.90	26.80	46.00	-19.20	AVG	
5		1.1461	34.96	10.01	44.97	56.00	-11.03	QP	
6		1.1461	19.30	10.01	29.31	46.00	-16.69	AVG	
7		1.3610	33.14	9.97	43.11	56.00	-12.89	QP	
8		1.3610	18.40	9.97	28.37	46.00	-17.63	AVG	
9		1.7984	31.93	9.89	41.82	56.00	-14.18	QP	
10		1.7984	16.80	9.89	26.69	46.00	-19.31	AVG	
11	*	2.7633	37.13	9.88	47.01	56.00	-8.99	QP	
12		2.7633	22.80	9.88	32.68	46.00	-13.32	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: BYD+USB Cable: Pang Ngai +Battery: SCUD


Neutral

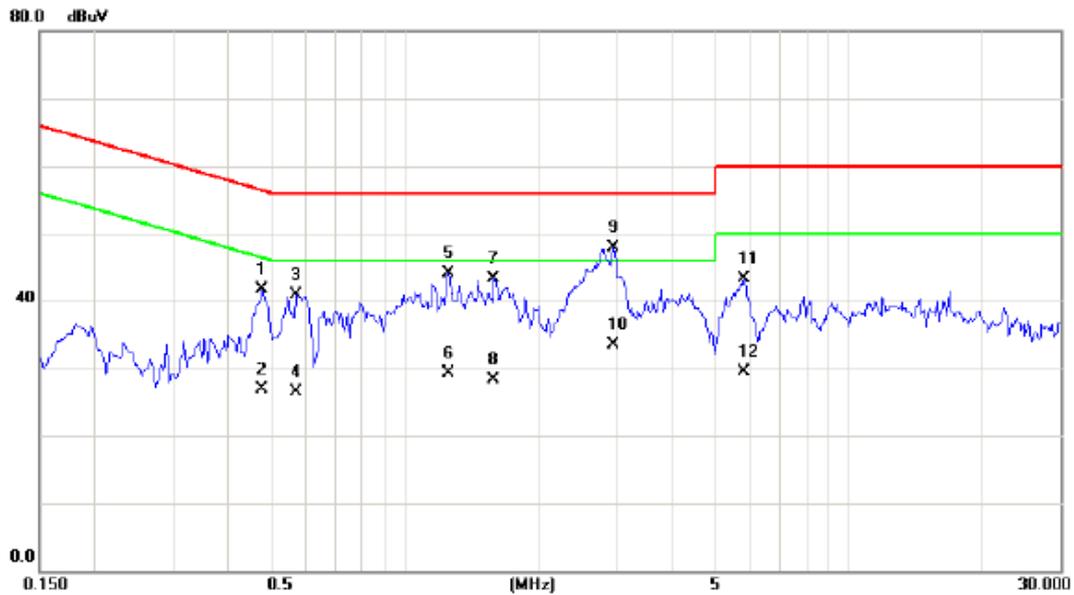

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4781	32.05	9.65	41.70	56.37	-14.67	QP	
2		0.4781	17.30	9.65	26.95	46.37	-19.42	AVG	
3		0.5680	31.33	9.67	41.00	56.00	-15.00	QP	
4		0.5680	16.90	9.67	26.57	46.00	-19.43	AVG	
5		1.2594	34.29	9.81	44.10	56.00	-11.90	QP	
6		1.2594	19.50	9.81	29.31	46.00	-16.69	AVG	
7		1.5914	33.56	9.84	43.40	56.00	-12.60	QP	
8		1.5914	18.40	9.84	28.24	46.00	-17.76	AVG	
9	*	2.9586	38.17	9.80	47.97	56.00	-8.03	QP	
10		2.9586	23.80	9.80	33.60	46.00	-12.40	AVG	
11		5.8203	33.16	10.12	43.28	60.00	-16.72	QP	
12		5.8203	19.40	10.12	29.52	50.00	-20.48	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+(LTE)
Note:	Adapter: BYD+USB Cable: Pang Ngai +Battery: SCUD


Line

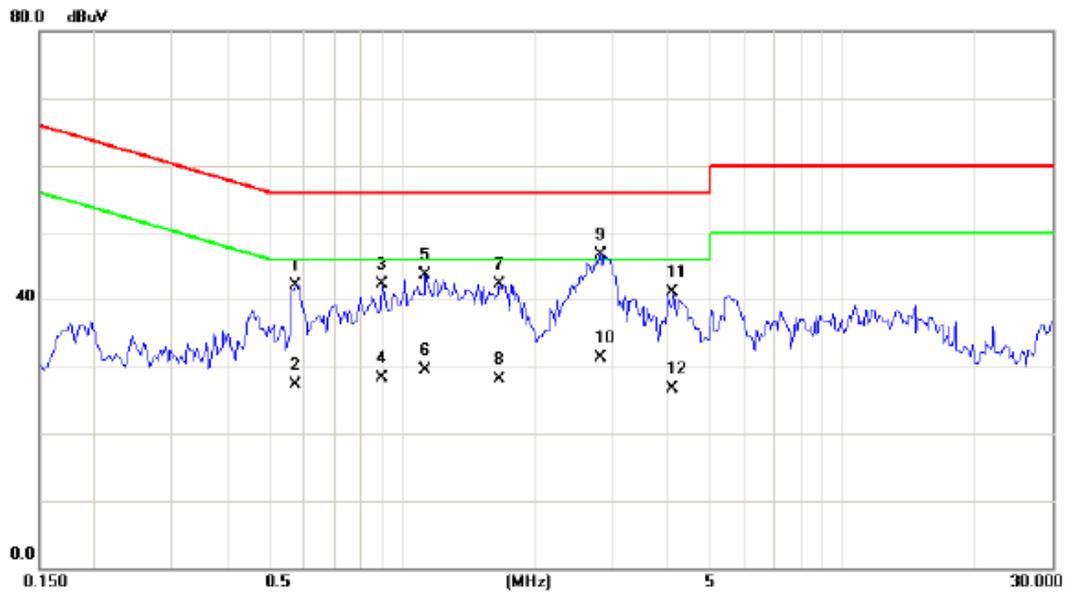

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5720	32.30	9.84	42.14	56.00	-13.86	QP	
2		0.5720	17.50	9.84	27.34	46.00	-18.66	AVG	
3		0.9000	32.32	9.95	42.27	56.00	-13.73	QP	
4		0.9000	18.40	9.95	28.35	46.00	-17.65	AVG	
5		1.1344	33.72	10.01	43.73	56.00	-12.27	QP	
6		1.1344	19.40	10.01	29.41	46.00	-16.59	AVG	
7		1.6695	32.50	9.90	42.40	56.00	-13.60	QP	
8		1.6695	18.30	9.90	28.20	46.00	-17.80	AVG	
9	*	2.8258	36.89	9.87	46.76	56.00	-9.24	QP	
10		2.8258	21.50	9.87	31.37	46.00	-14.63	AVG	
11		4.1288	31.27	9.75	41.02	56.00	-14.98	QP	
12		4.1288	16.90	9.75	26.65	46.00	-19.35	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+(LTE)
Note:	Adapter: BYD+USB Cable: Pang Ngai +Battery: SCUD


Neutral

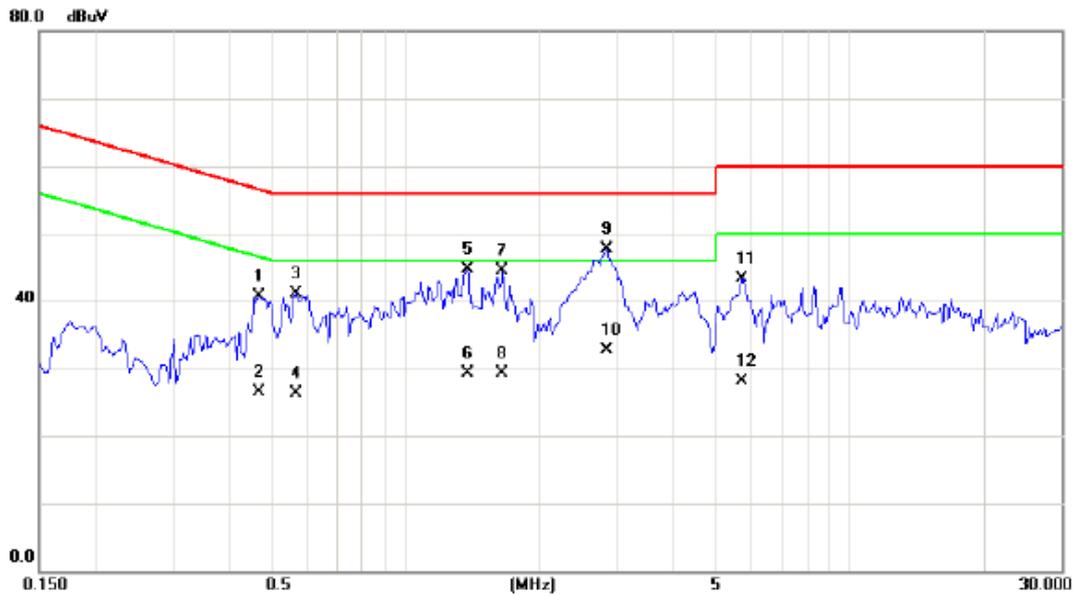

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4703	31.09	9.64	40.73	56.51	-15.78	QP	
2	0.4703	16.90	9.64	26.54	46.51	-19.97	AVG	
3	0.5680	31.47	9.67	41.14	56.00	-14.86	QP	
4	0.5680	16.70	9.67	26.37	46.00	-19.63	AVG	
5	1.3844	34.84	9.82	44.66	56.00	-11.34	QP	
6	1.3844	19.50	9.82	29.32	46.00	-16.68	AVG	
7	1.6578	34.58	9.85	44.43	56.00	-11.57	QP	
8	1.6578	19.40	9.85	29.25	46.00	-16.75	AVG	
9 *	2.8492	37.96	9.82	47.78	56.00	-8.22	QP	
10	2.8492	22.80	9.82	32.62	46.00	-13.38	AVG	
11	5.7422	33.11	10.12	43.23	60.00	-16.77	QP	
12	5.7422	17.90	10.12	28.02	50.00	-21.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Line

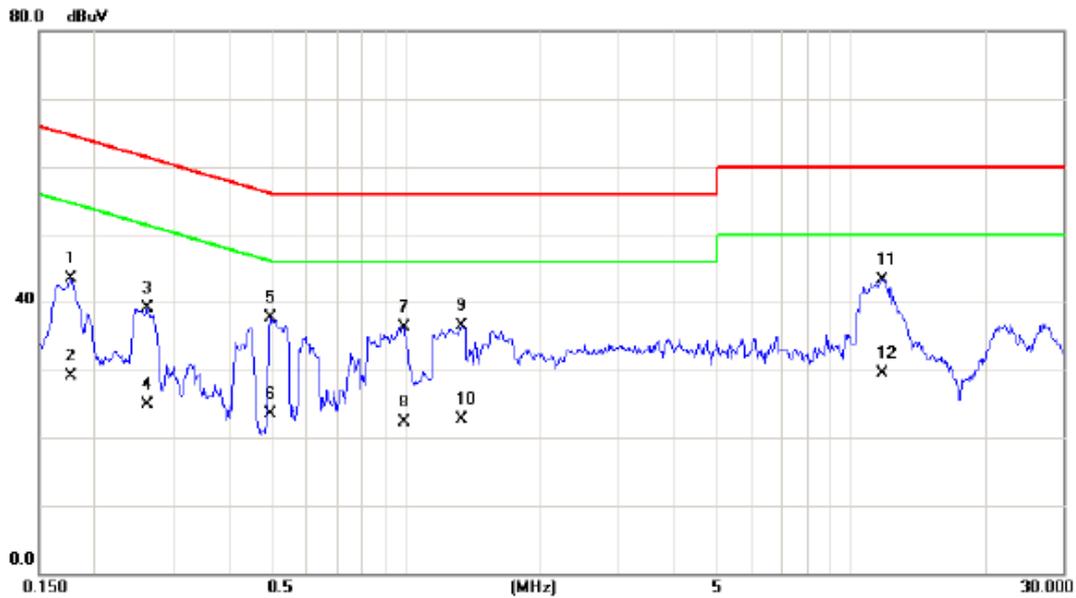

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1773	33.88	9.69	43.57	64.61	-21.04	QP	
2	0.1773	19.50	9.69	29.19	54.61	-25.42	AVG	
3	0.2631	29.28	9.74	39.02	61.33	-22.31	QP	
4	0.2631	15.20	9.74	24.94	51.33	-26.39	AVG	
5	0.4974	27.84	9.82	37.66	56.04	-18.38	QP	
6	0.4974	13.70	9.82	23.52	46.04	-22.52	AVG	
7	0.9976	26.34	9.98	36.32	56.00	-19.68	QP	
8	0.9976	12.40	9.98	22.38	46.00	-23.62	AVG	
9	1.3370	26.43	9.98	36.41	56.00	-19.59	QP	
10	1.3370	12.80	9.98	22.78	46.00	-23.22	AVG	
11 *	11.7446	33.26	10.13	43.39	60.00	-16.61	QP	
12	11.7446	19.30	10.13	29.43	50.00	-20.57	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD

Neutral

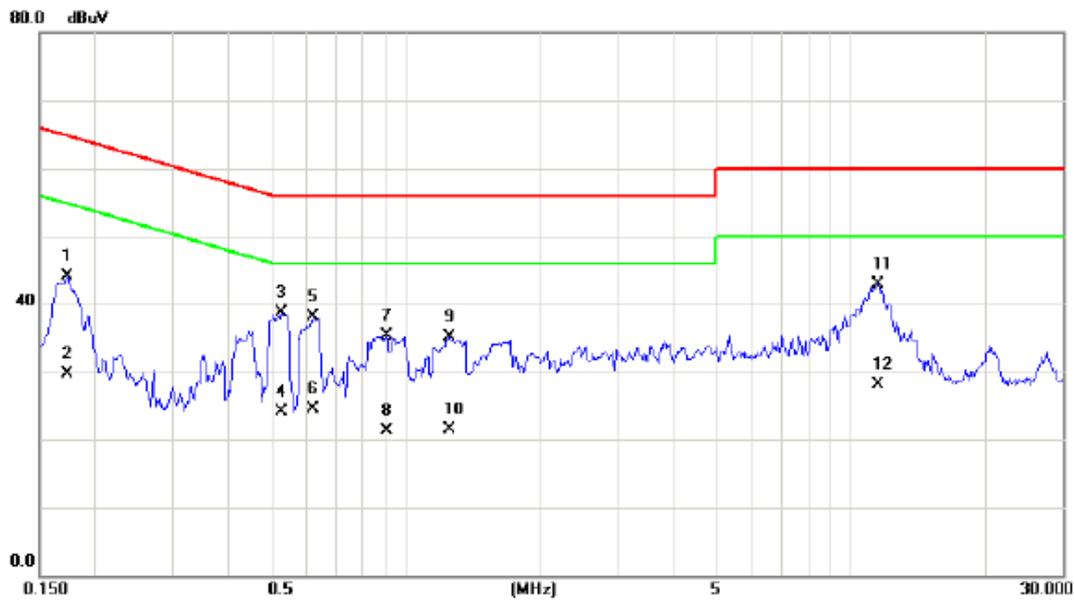


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1733	34.50	9.60	44.10	64.80	-20.70	QP	
2	0.1733	20.20	9.60	29.80	54.80	-25.00	AVG	
3	0.5237	28.96	9.65	38.61	56.00	-17.39	QP	
4	0.5237	14.50	9.65	24.15	46.00	-21.85	AVG	
5	0.6187	28.44	9.68	38.12	56.00	-17.88	QP	
6	0.6187	14.80	9.68	24.48	46.00	-21.52	AVG	
7	0.9078	25.53	9.75	35.28	56.00	-20.72	QP	
8	0.9078	11.60	9.75	21.35	46.00	-24.65	AVG	
9	1.2554	25.27	9.81	35.08	56.00	-20.92	QP	
10	1.2554	11.70	9.81	21.51	46.00	-24.49	AVG	
11 *	11.5234	32.83	10.11	42.94	60.00	-17.06	QP	
12	11.5234	18.00	10.11	28.11	50.00	-21.89	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD;Horizontal Rotation


Vertical

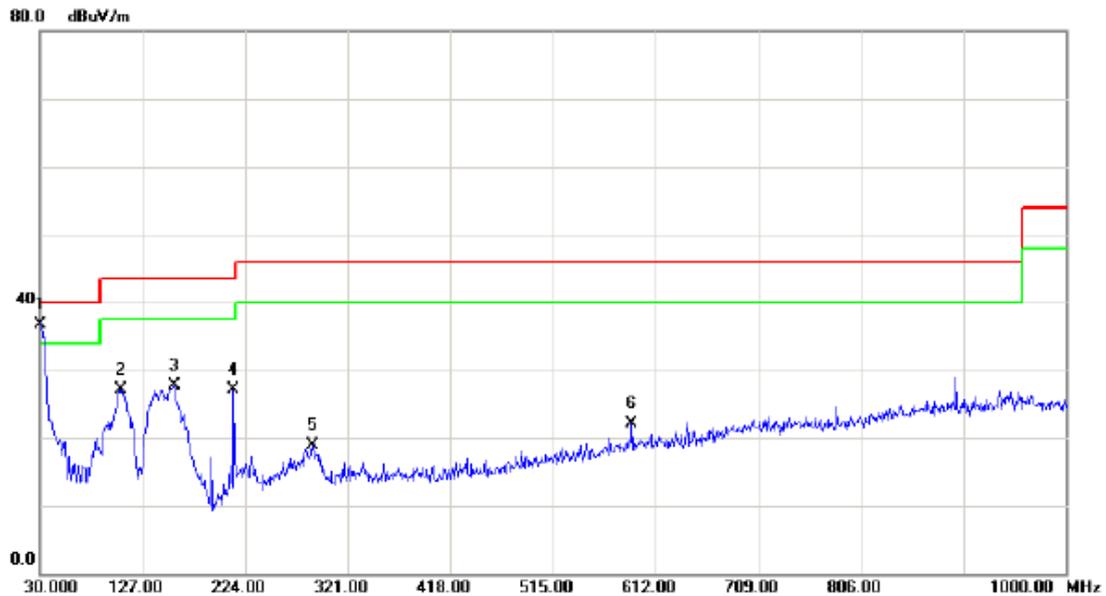

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	51.69	-15.08	36.61	40.00	-3.39	QP	
2		106.6300	44.95	-17.82	27.13	43.50	-16.37	QP	
3		157.0700	41.59	-13.96	27.63	43.50	-15.87	QP	
4		213.3300	43.66	-16.56	27.10	43.50	-16.40	QP	
5		288.0200	32.65	-13.75	18.90	46.00	-27.10	QP	
6		589.6900	29.61	-7.56	22.05	46.00	-23.95	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD;Horizontal Rotation


Horizontal

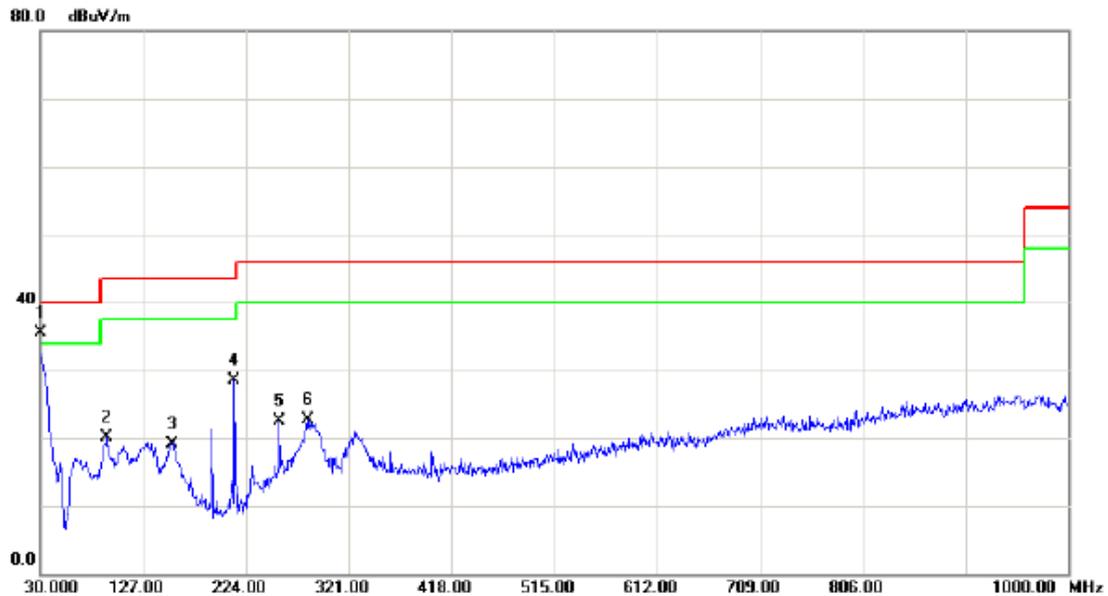

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	50.54	-15.08	35.46	40.00	-4.54	QP	
2		93.0500	39.98	-19.86	20.12	43.50	-23.38	QP	
3		155.1300	33.10	-13.99	19.11	43.50	-24.39	QP	
4		213.3300	45.02	-16.56	28.46	43.50	-15.04	QP	
5		256.0100	37.28	-14.79	22.49	46.00	-23.51	QP	
6		283.1700	36.56	-13.88	22.68	46.00	-23.32	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD;Vertical Rotation


Vertical

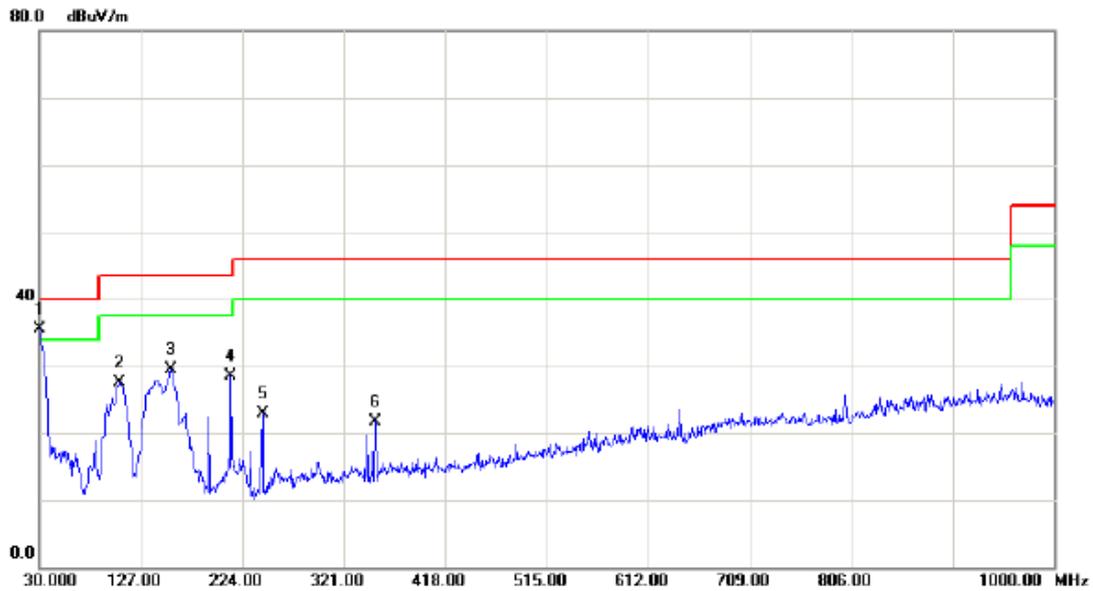

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	50.54	-15.08	35.46	40.00	-4.54	QP	
2		106.6300	45.35	-17.82	27.53	43.50	-15.97	QP	
3		156.1000	43.47	-13.97	29.50	43.50	-14.00	QP	
4		213.3300	45.02	-16.56	28.46	43.50	-15.04	QP	
5		243.4000	38.11	-15.22	22.89	46.00	-23.11	QP	
6		351.0700	34.04	-12.24	21.80	46.00	-24.20	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD;Vertical Rotation


Horizontal

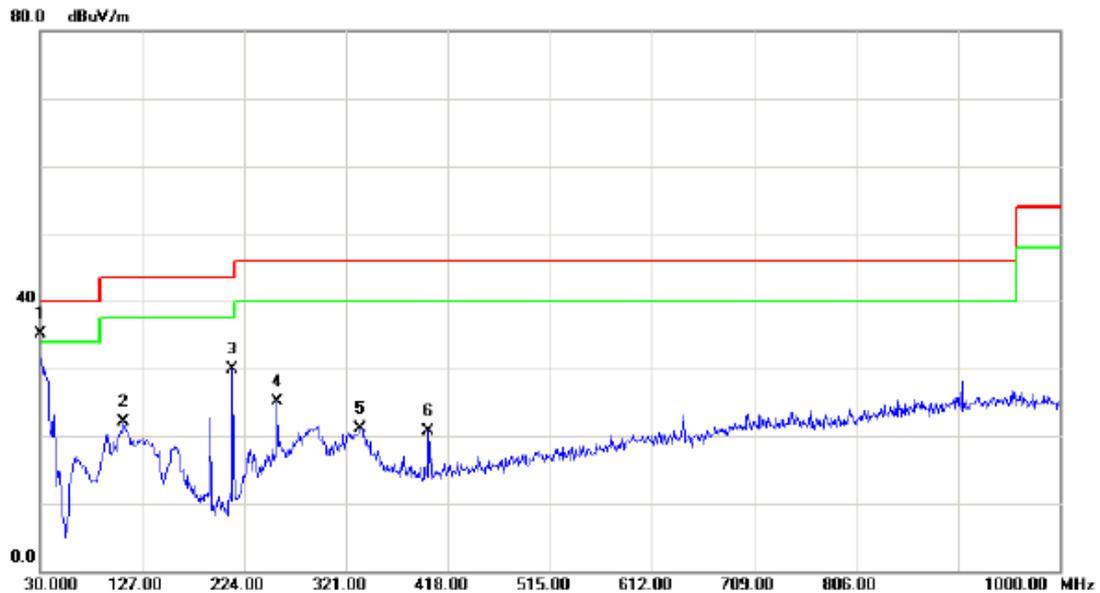

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	50.24	-15.08	35.16	40.00	-4.84	QP	
2		109.5400	39.46	-17.39	22.07	43.50	-21.43	QP	
3		213.3300	46.37	-16.56	29.81	43.50	-13.69	QP	
4		256.0100	39.89	-14.79	25.10	46.00	-20.90	QP	
5		334.5800	33.74	-12.59	21.15	46.00	-24.85	QP	
6		399.5700	31.74	-11.10	20.64	46.00	-25.36	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Unirise+Earphone: QUANCHENG+Battery: SCUD; Horizontal Rotation


Vertical

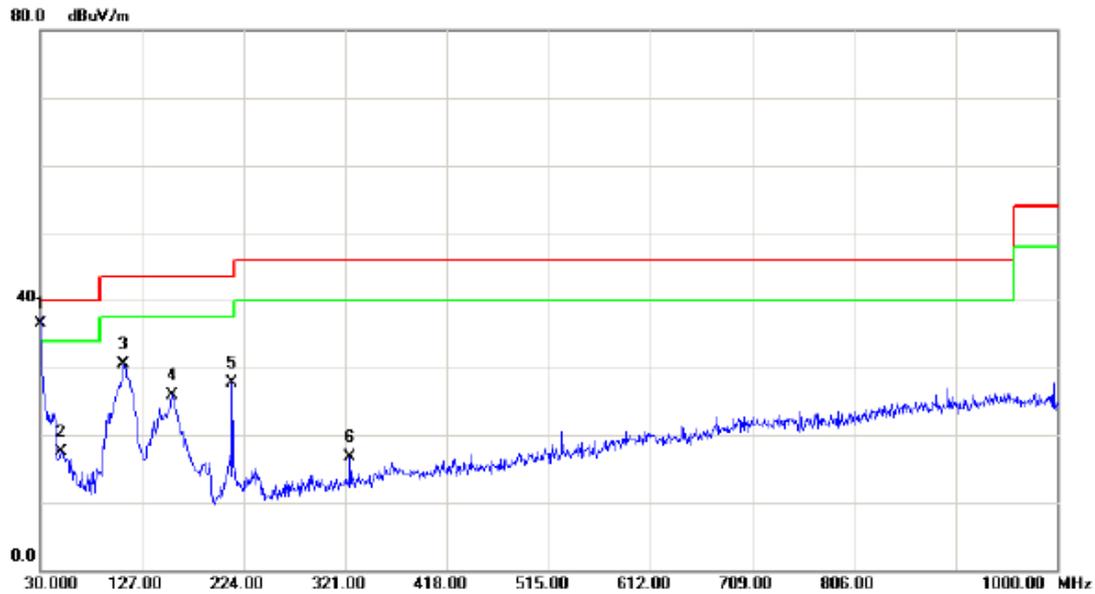

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	51.54	-15.08	36.46	40.00	-3.54	QP	
2		50.3700	31.32	-13.73	17.59	40.00	-22.41	QP	
3		109.5400	47.90	-17.39	30.51	43.50	-12.99	QP	
4		156.1000	39.90	-13.97	25.93	43.50	-17.57	QP	
5		213.3300	44.33	-16.56	27.77	43.50	-15.73	QP	
6		325.8500	29.56	-12.80	16.76	46.00	-29.24	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Unirise+Earphone: QUANCHENG+Battery: SCUD; Horizontal Rotation


Horizontal

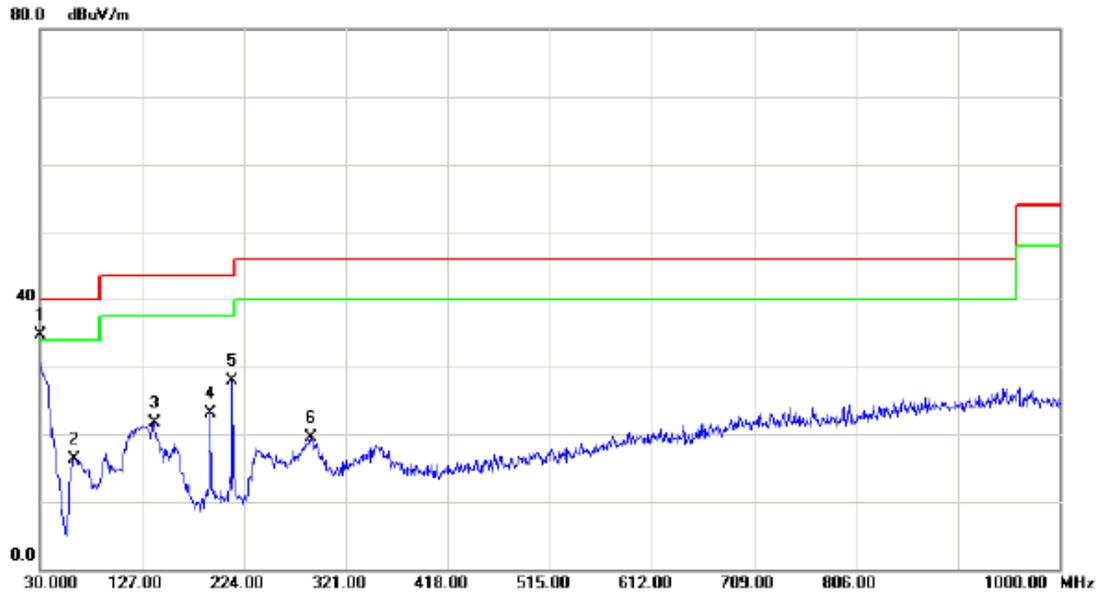

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	49.74	-15.08	34.66	40.00	-5.34	QP	
2		62.9800	31.60	-15.20	16.40	40.00	-23.60	QP	
3		138.6400	36.28	-14.56	21.72	43.50	-21.78	QP	
4		191.9900	39.83	-16.68	23.15	43.50	-20.35	QP	
5		213.3300	44.47	-16.56	27.91	43.50	-15.59	QP	
6		288.0200	33.29	-13.75	19.54	46.00	-26.46	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Connrex+Earphone: Lianchuang+Battery: SCUD; Horizontal Rotation


Vertical

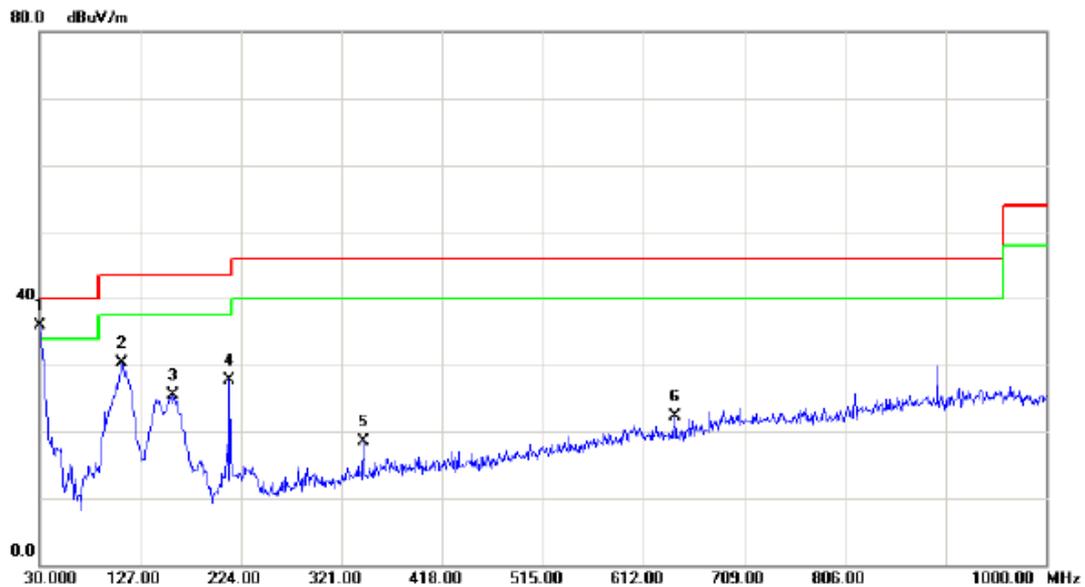

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	51.04	-15.08	35.96	40.00	-4.04	QP	
2		109.5400	47.73	-17.39	30.34	43.50	-13.16	QP	
3		158.0400	39.44	-13.94	25.50	43.50	-18.00	QP	
4		213.3300	44.35	-16.56	27.79	43.50	-15.71	QP	
5		342.3400	30.96	-12.41	18.55	46.00	-27.45	QP	
6		642.0700	29.34	-7.00	22.34	46.00	-23.66	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Connrex+Earphone: Lianchuang+Battery: SCUD; Horizontal Rotation


Horizontal

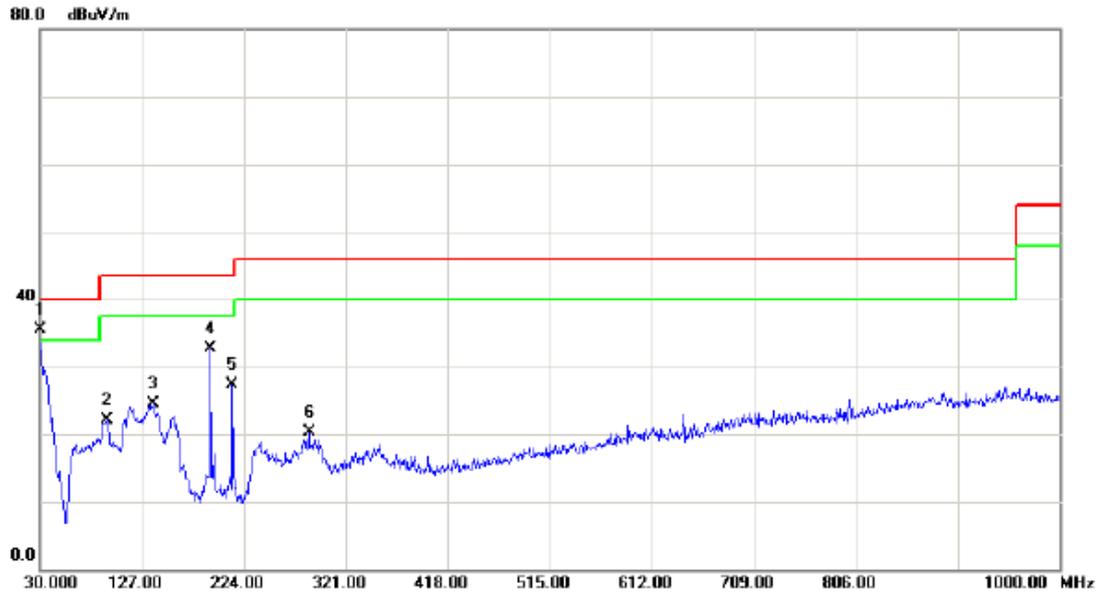

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	50.54	-15.08	35.46	40.00	-4.54	QP	
2		94.0200	41.89	-19.72	22.17	43.50	-21.33	QP	
3		137.6700	39.11	-14.63	24.48	43.50	-19.02	QP	
4		191.9900	49.48	-16.68	32.80	43.50	-10.70	QP	
5		213.3300	43.86	-16.56	27.30	43.50	-16.20	QP	
6		286.0800	34.02	-13.80	20.22	46.00	-25.78	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Honglin+Earphone: MERRY+Battery: SCUD; Horizontal Rotation


Vertical

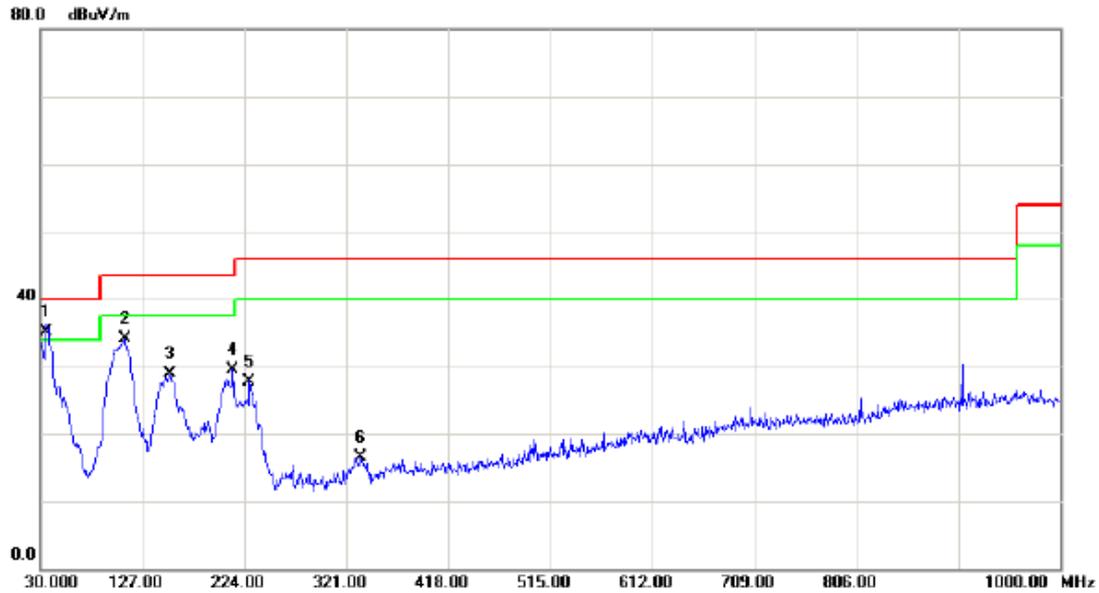

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	35.8200	50.01	-14.99	35.02	40.00	-4.98	QP	
2		110.5100	51.42	-17.26	34.16	43.50	-9.34	QP	
3		153.1900	42.86	-14.01	28.85	43.50	-14.65	QP	
4		213.3300	46.16	-16.56	29.60	43.50	-13.90	QP	
5		228.8500	43.72	-15.92	27.80	46.00	-18.20	QP	
6		334.5800	29.14	-12.59	16.55	46.00	-29.45	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Honglin+Earphone: MERRY+Battery: SCUD; Horizontal Rotation


Horizontal

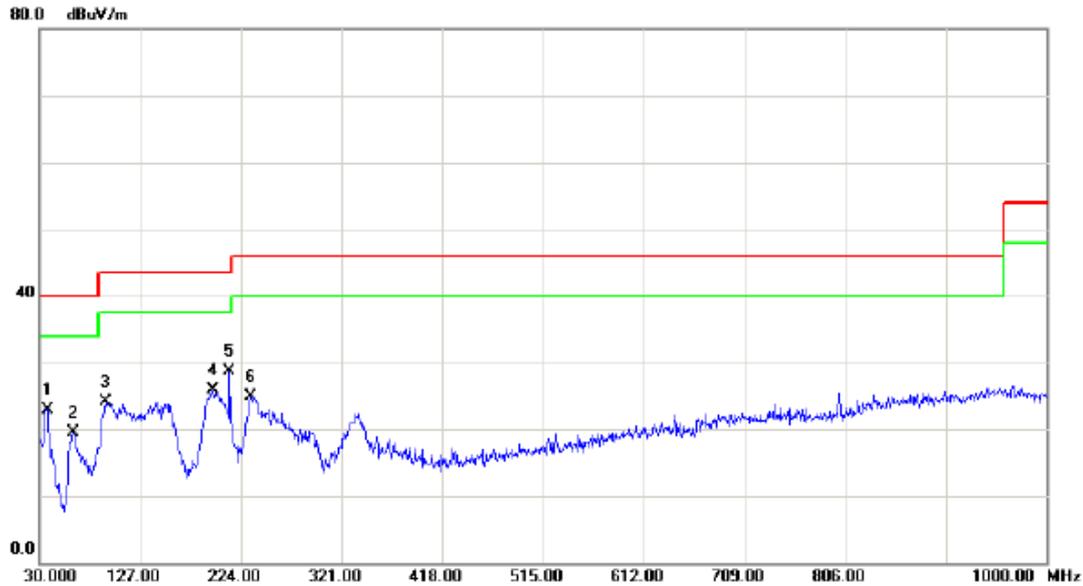

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	37.49	-14.62	22.87	40.00	-17.13	QP	
2		62.9800	34.74	-15.20	19.54	40.00	-20.46	QP	
3		94.0200	43.91	-19.72	24.19	43.50	-19.31	QP	
4		197.8100	42.60	-16.71	25.89	43.50	-17.61	QP	
5	*	213.3300	45.29	-16.56	28.73	43.50	-14.77	QP	
6		233.7000	40.54	-15.62	24.92	46.00	-21.08	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai+Earphone: GoerTek Inc (white)+Battery: SCUD; Horizontal Rotation


Vertical

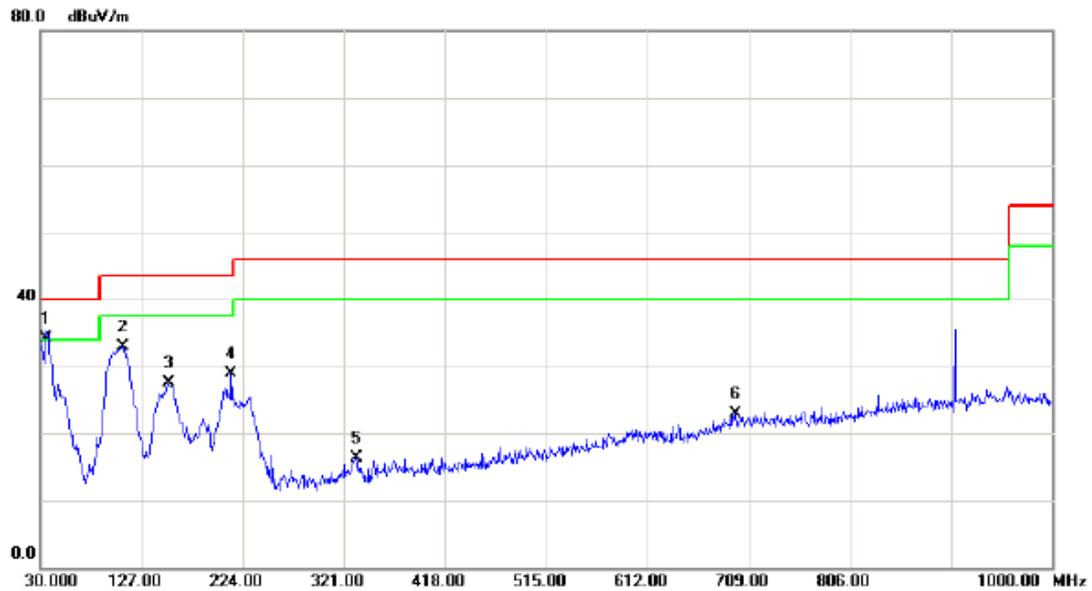

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	35.8200	49.11	-14.99	34.12	40.00	-5.88	QP	
2		109.5400	50.34	-17.39	32.95	43.50	-10.55	QP	
3		153.1900	41.57	-14.01	27.56	43.50	-15.94	QP	
4		213.3300	45.52	-16.56	28.96	43.50	-14.54	QP	
5		332.6400	28.94	-12.64	16.30	46.00	-29.70	QP	
6		696.3900	28.41	-5.52	22.89	46.00	-23.11	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai+Earphone: GoerTek Inc (white)+Battery: SCUD; Horizontal Rotation


Horizontal

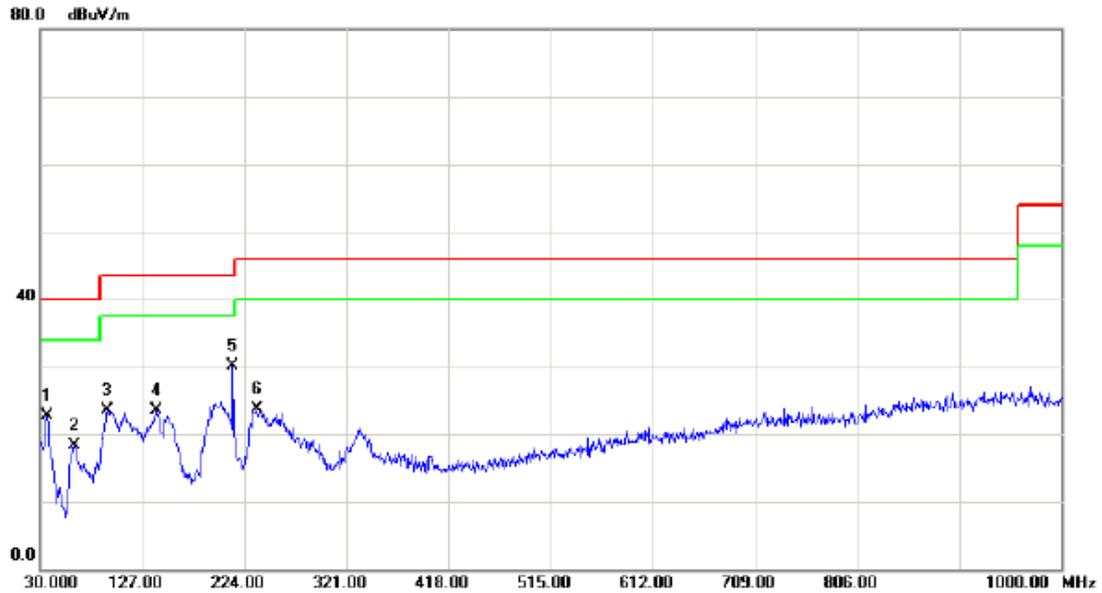

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		36.7900	37.46	-14.81	22.65	40.00	-17.35	QP	
2		62.9800	33.44	-15.20	18.24	40.00	-21.76	QP	
3		94.0200	43.21	-19.72	23.49	43.50	-20.01	QP	
4		140.5800	37.90	-14.42	23.48	43.50	-20.02	QP	
5	*	213.3300	46.57	-16.56	30.01	43.50	-13.49	QP	
6		235.6400	39.20	-15.50	23.70	46.00	-22.30	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter:HK+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD; Horizontal Rotation


Vertical

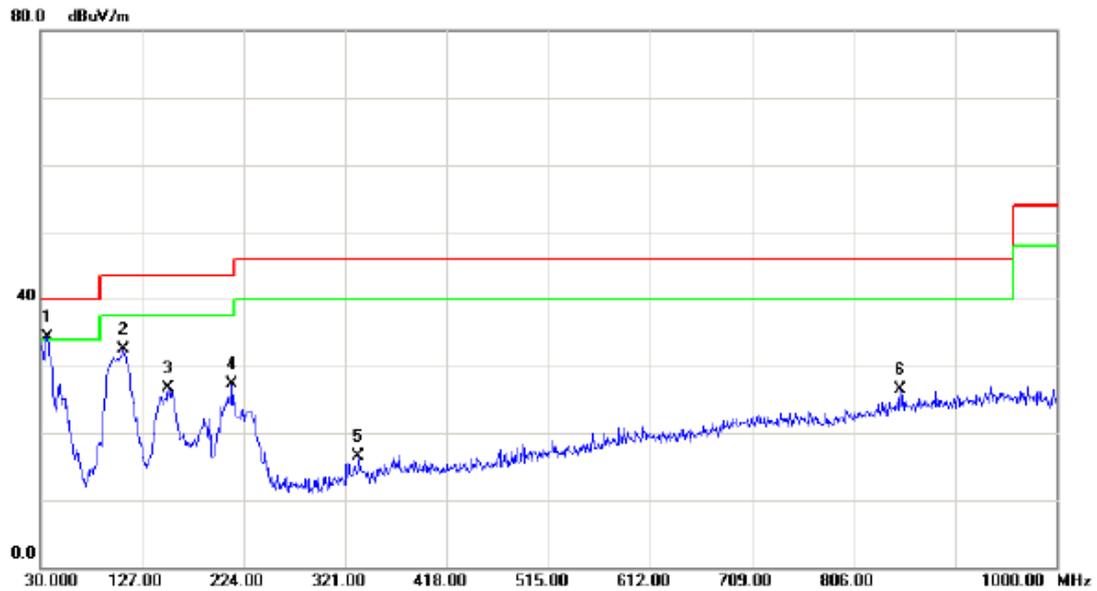

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	36.7900	49.21	-14.81	34.40	40.00	-5.60	QP	
2		109.5400	49.89	-17.39	32.50	43.50	-11.00	QP	
3		152.2200	40.71	-14.03	26.68	43.50	-16.82	QP	
4		213.3300	43.77	-16.56	27.21	43.50	-16.29	QP	
5		333.6100	29.17	-12.62	16.55	46.00	-29.45	QP	
6		850.6200	30.37	-3.83	26.54	46.00	-19.46	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter:HK+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD; Horizontal Rotation


Horizontal

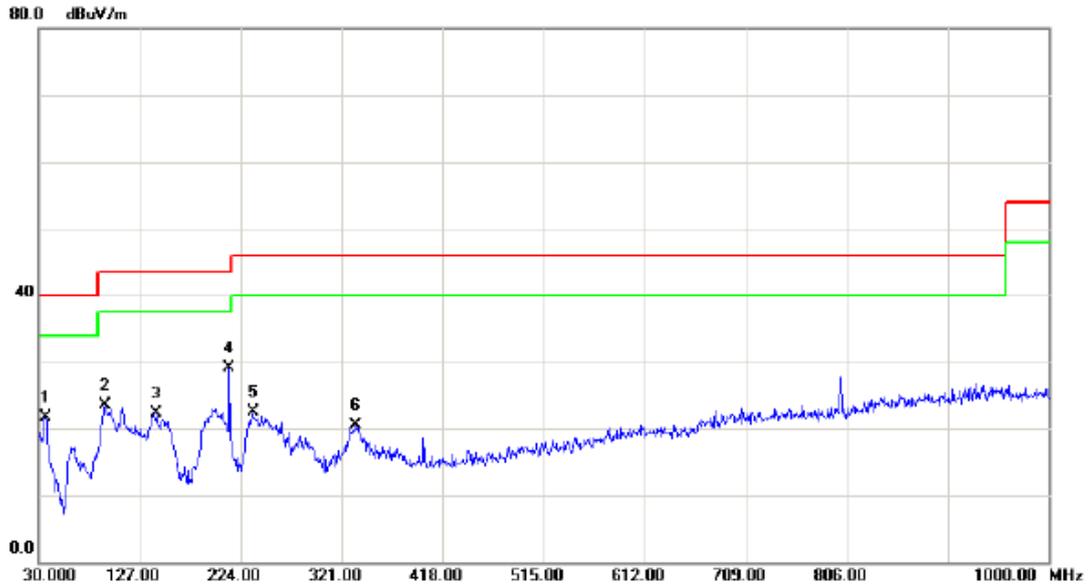

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		36.7900	36.57	-14.81	21.76	40.00	-18.24	QP	
2		94.0200	43.26	-19.72	23.54	43.50	-19.96	QP	
3		143.4900	36.64	-14.31	22.33	43.50	-21.17	QP	
4	*	213.3300	45.65	-16.56	29.09	43.50	-14.41	QP	
5		235.6400	37.97	-15.50	22.47	46.00	-23.53	QP	
6		334.5800	33.06	-12.59	20.47	46.00	-25.53	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD(EU Plug)+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD; Horizontal Rotation


Vertical

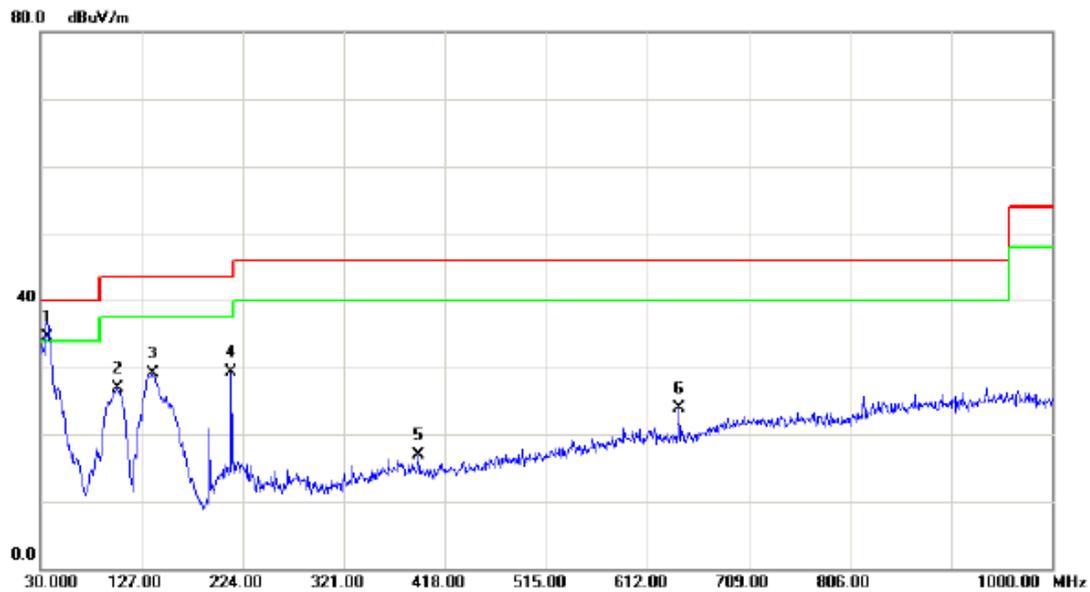

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	36.7900	49.35	-14.81	34.54	40.00	-5.46	QP	
2		103.7200	45.27	-18.27	27.00	43.50	-16.50	QP	
3		137.6700	43.70	-14.63	29.07	43.50	-14.43	QP	
4		213.3300	45.95	-16.56	29.39	43.50	-14.11	QP	
5		392.7800	28.23	-11.27	16.96	46.00	-29.04	QP	
6		642.0700	30.92	-7.00	23.92	46.00	-22.08	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD(EU Plug)+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD; Horizontal Rotation


Horizontal

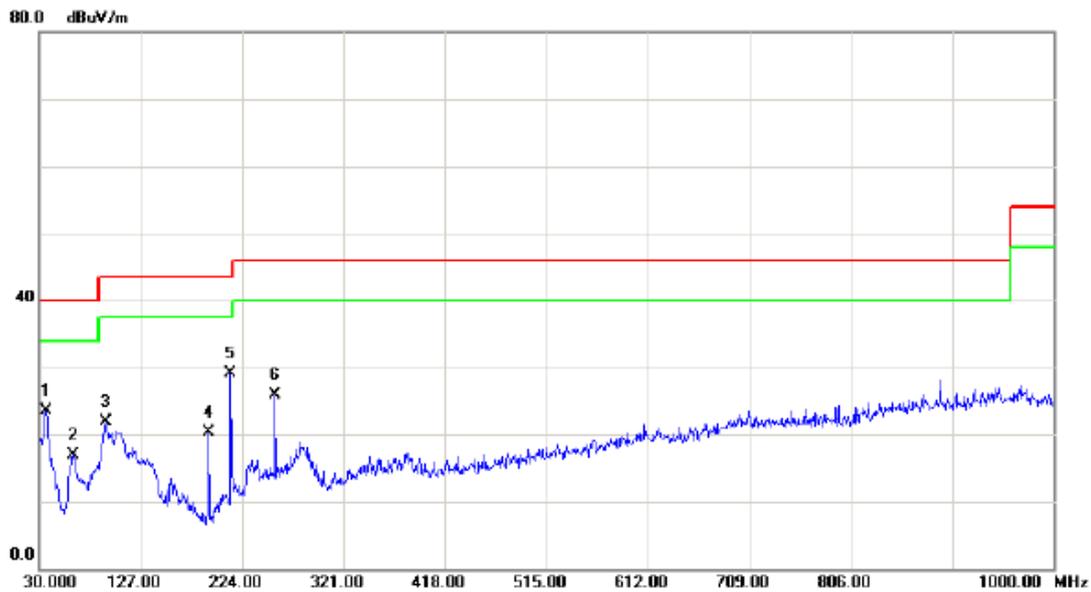

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		36.7900	38.24	-14.81	23.43	40.00	-16.57	QP	
2		62.9800	32.01	-15.20	16.81	40.00	-23.19	QP	
3		94.0200	41.62	-19.72	21.90	43.50	-21.60	QP	
4		191.9900	36.92	-16.68	20.24	43.50	-23.26	QP	
5	*	213.3300	45.62	-16.56	29.06	43.50	-14.44	QP	
6		256.0100	40.63	-14.79	25.84	46.00	-20.16	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter:HK(EU Plug)+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD; Horizontal Rotation


Vertical

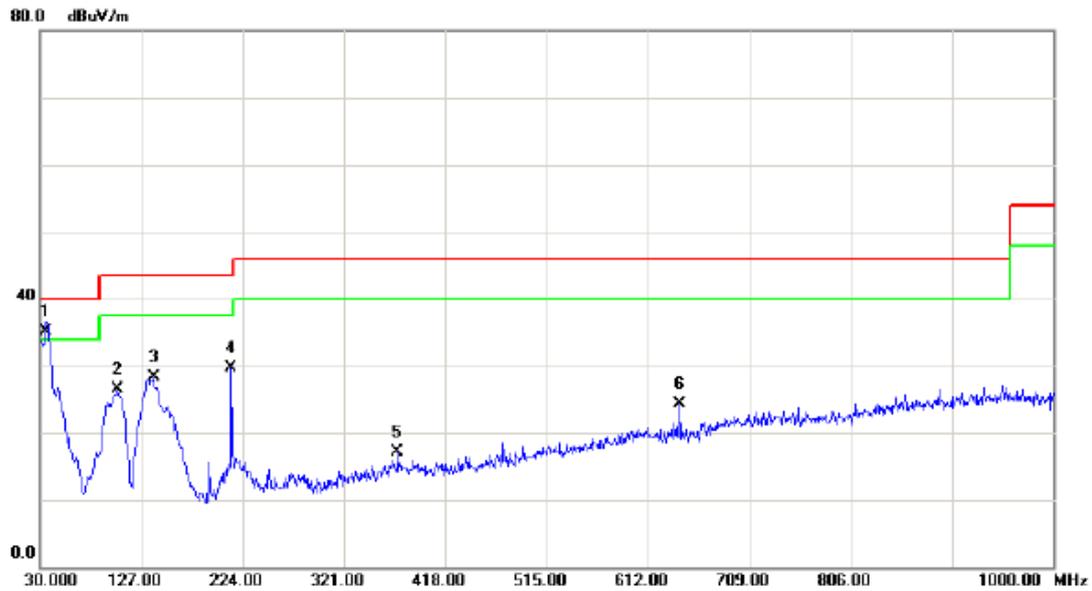

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	35.8200	50.11	-14.99	35.12	40.00	-4.88	QP	
2		103.7200	44.78	-18.27	26.51	43.50	-16.99	QP	
3		138.6400	42.83	-14.56	28.27	43.50	-15.23	QP	
4		213.3300	46.33	-16.56	29.77	43.50	-13.73	QP	
5		372.4100	28.92	-11.79	17.13	46.00	-28.87	QP	
6		642.0700	31.30	-7.00	24.30	46.00	-21.70	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter:HK(EU Plug)+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD; Horizontal Rotation


Horizontal

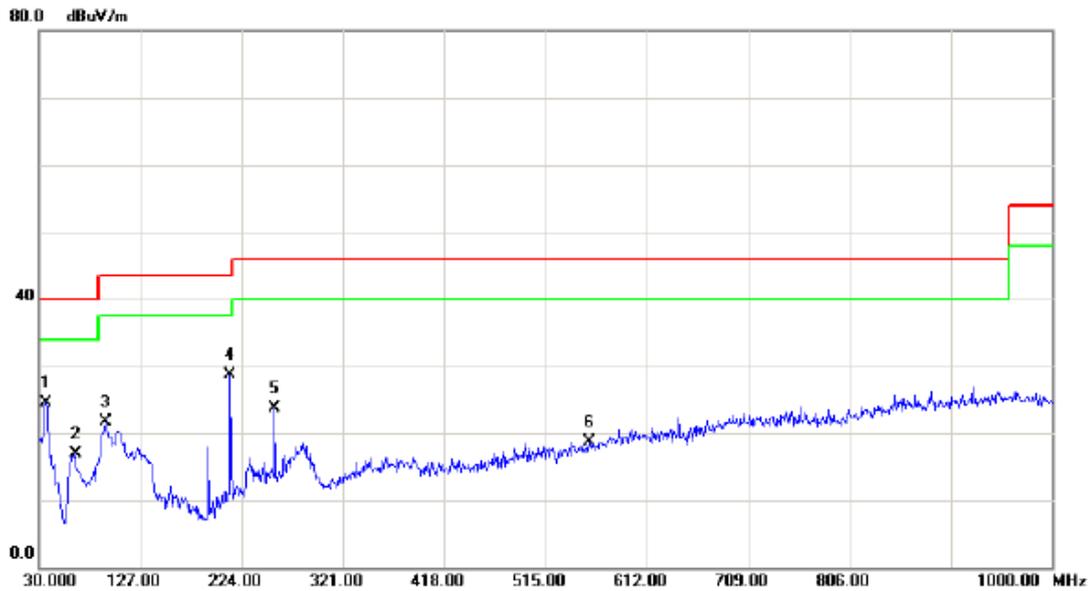

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		36.7900	39.37	-14.81	24.56	40.00	-15.44	QP	
2		64.9200	32.42	-15.49	16.93	40.00	-23.07	QP	
3		94.0200	41.42	-19.72	21.70	43.50	-21.80	QP	
4	*	213.3300	45.29	-16.56	28.73	43.50	-14.77	QP	
5		256.0100	38.58	-14.79	23.79	46.00	-22.21	QP	
6		556.7100	26.68	-7.91	18.77	46.00	-27.23	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: Sunwoda; Horizontal Rotation


Vertical

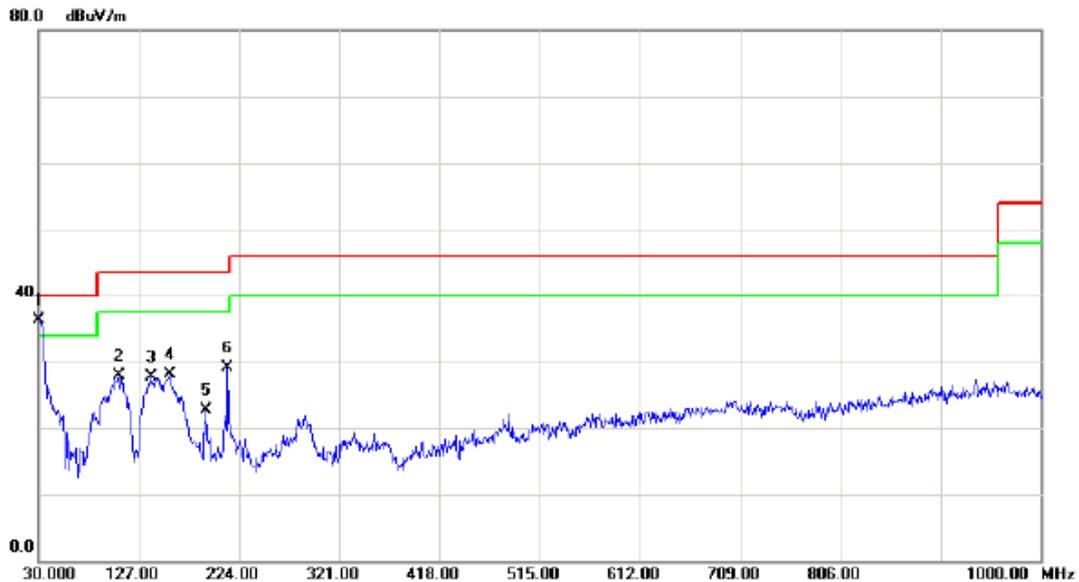

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	51.36	-15.08	36.28	40.00	-3.72	QP	
2		107.6000	45.54	-17.68	27.86	43.50	-15.64	QP	
3		138.6400	42.25	-14.56	27.69	43.50	-15.81	QP	
4		157.0700	42.09	-13.96	28.13	43.50	-15.37	QP	
5		191.9900	39.33	-16.68	22.65	43.50	-20.85	QP	
6		213.3300	45.66	-16.56	29.10	43.50	-14.40	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: Sunwoda; Horizontal Rotation


Horizontal

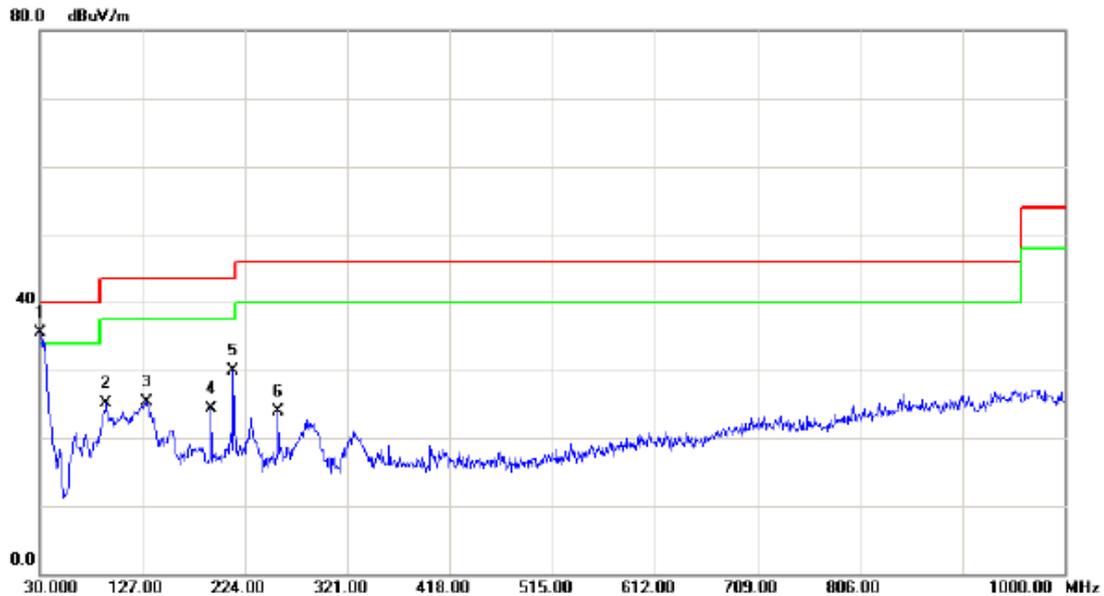

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	50.64	-15.08	35.56	40.00	-4.44	QP	
2		93.0500	44.98	-19.86	25.12	43.50	-18.38	QP	
3		130.8800	40.61	-15.23	25.38	43.50	-18.12	QP	
4		191.9900	40.93	-16.68	24.25	43.50	-19.25	QP	
5		213.3300	46.52	-16.56	29.96	43.50	-13.54	QP	
6		256.0100	38.78	-14.79	23.99	46.00	-22.01	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Playing+idle
Note:	Adapter: BYD+USB Cable: Pang Ngai +Battery: SCUD; Horizontal Rotation


Vertical

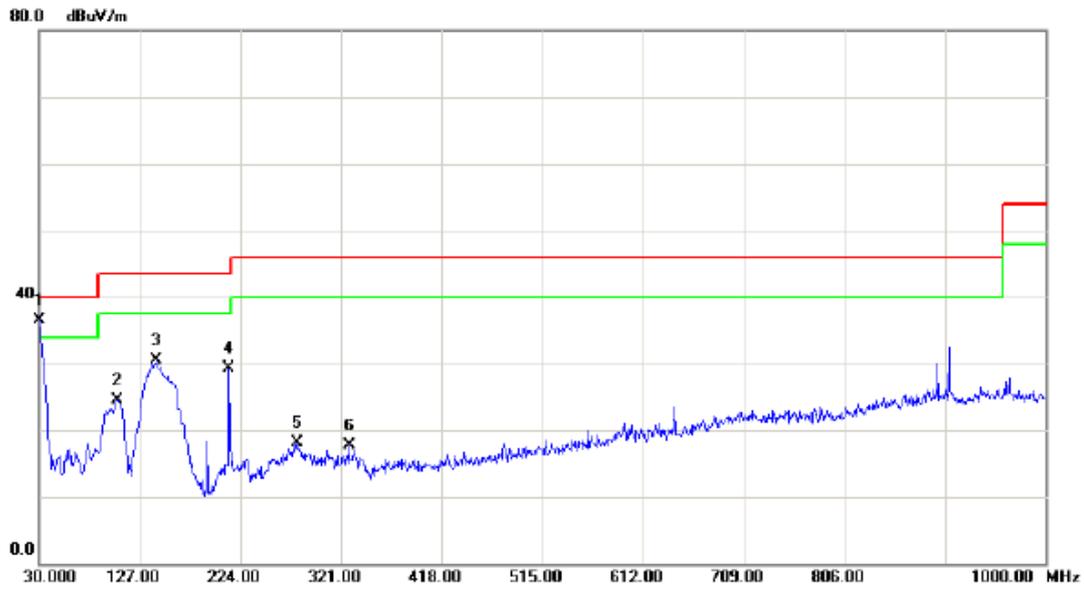

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	51.54	-15.08	36.46	40.00	-3.54	QP	
2		105.6600	42.38	-17.97	24.41	43.50	-19.09	QP	
3		142.5200	44.92	-14.34	30.58	43.50	-12.92	QP	
4		213.3300	45.85	-16.56	29.29	43.50	-14.21	QP	
5		278.3200	32.11	-14.01	18.10	46.00	-27.90	QP	
6		328.7600	30.40	-12.74	17.66	46.00	-28.34	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Playing+idle
Note:	Adapter: BYD+USB Cable: Pang Ngai +Battery: SCUD; Horizontal Rotation

Horizontal

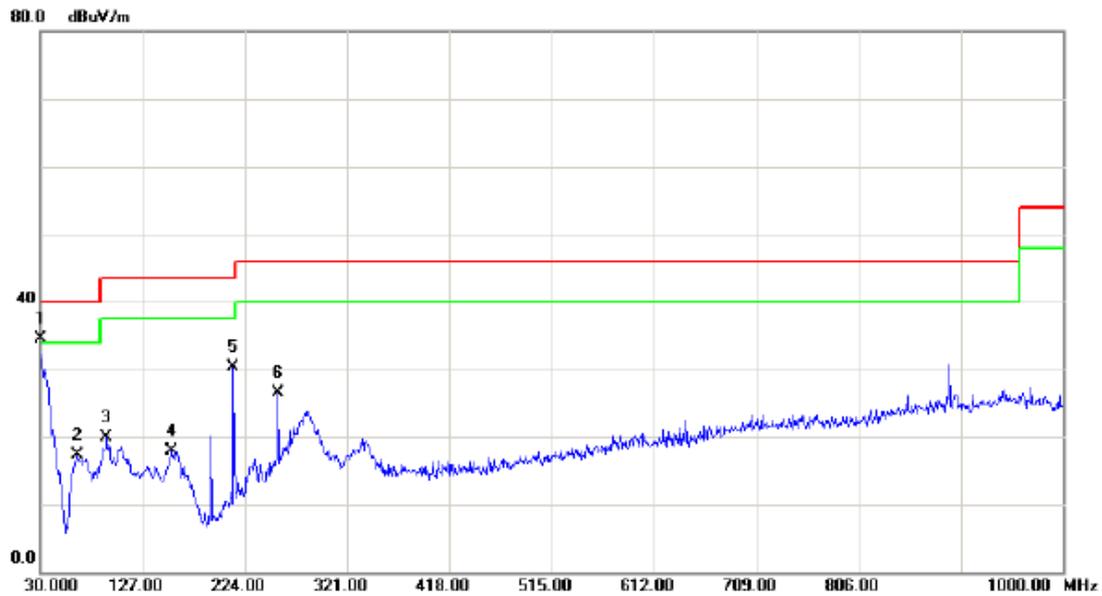

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	49.54	-15.08	34.46	40.00	-5.54	QP	
2		64.9200	32.77	-15.49	17.28	40.00	-22.72	QP	
3		93.0500	39.70	-19.86	19.84	43.50	-23.66	QP	
4		155.1300	31.88	-13.99	17.89	43.50	-25.61	QP	
5		213.3300	46.83	-16.56	30.27	43.50	-13.23	QP	
6		256.0100	41.28	-14.79	26.49	46.00	-19.51	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic(GSM)+Earphone
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD; Horizontal Rotation


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	50.24	-15.08	35.16	40.00	-4.84	QP	
2		104.6900	42.36	-18.12	24.24	43.50	-19.26	QP	
3		138.6400	44.19	-14.56	29.63	43.50	-13.87	QP	
4		213.3300	45.81	-16.56	29.25	43.50	-14.25	QP	
5		268.6200	31.61	-14.26	17.35	46.00	-28.65	QP	
6		642.0700	29.87	-7.00	22.87	46.00	-23.13	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic(GSM)+Earphone
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD; Horizontal Rotation


Horizontal

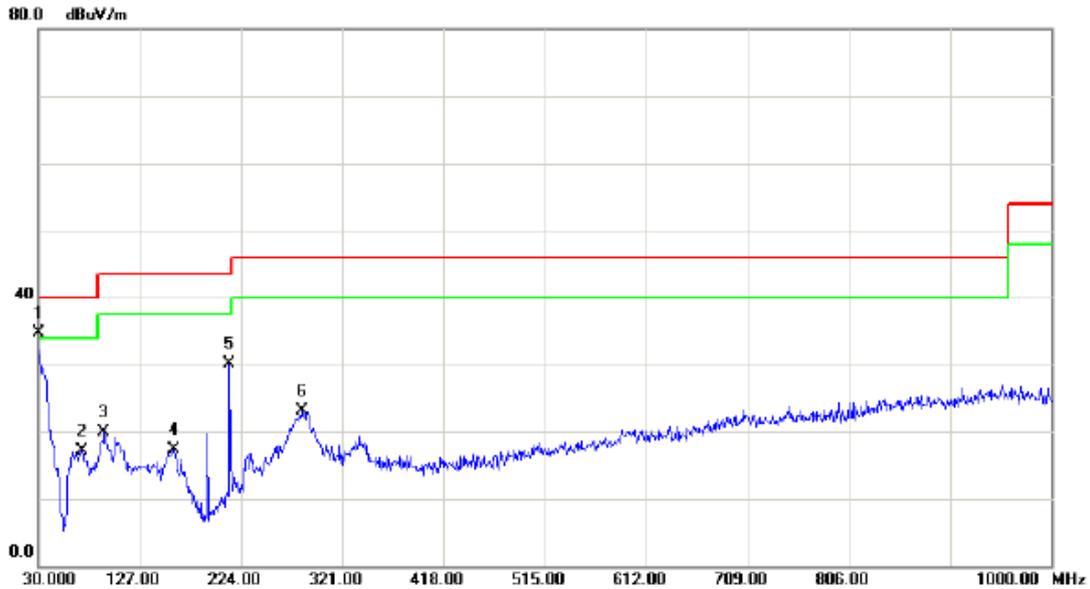

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	49.74	-15.08	34.66	40.00	-5.34	QP	
2		71.7100	33.77	-16.58	17.19	40.00	-22.81	QP	
3		93.0500	39.85	-19.86	19.99	43.50	-23.51	QP	
4		159.9800	31.25	-13.92	17.33	43.50	-26.17	QP	
5		213.3300	46.73	-16.56	30.17	43.50	-13.33	QP	
6		282.2000	37.08	-13.91	23.17	46.00	-22.83	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: BYD+USB Cable: Pang Ngai +Battery: SCUD; Horizontal Rotation


Vertical

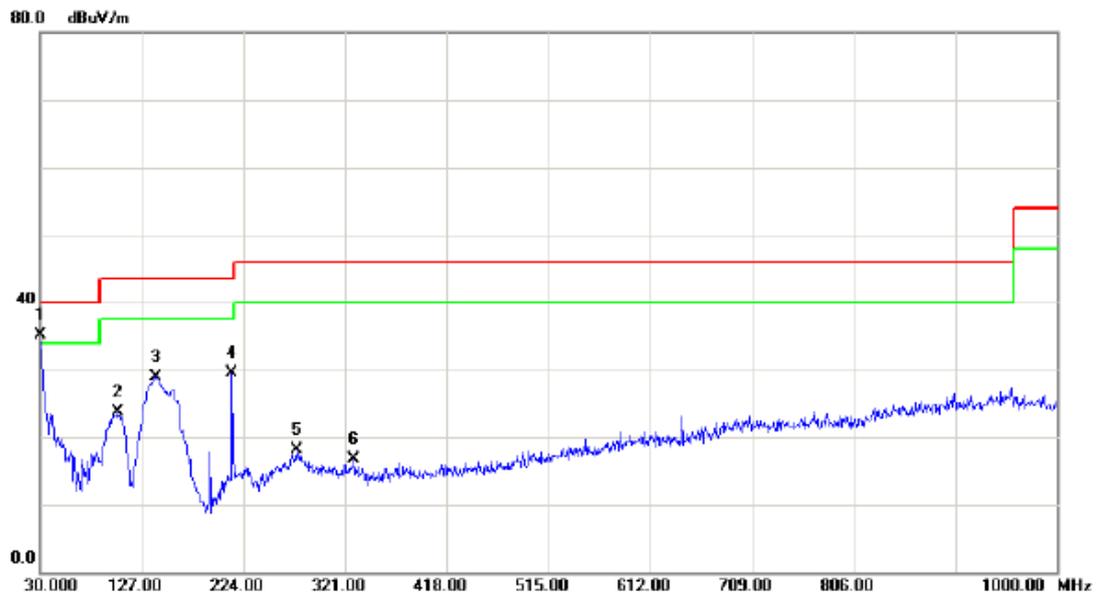

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	50.24	-15.08	35.16	40.00	-4.84	QP	
2		103.7200	41.95	-18.27	23.68	43.50	-19.82	QP	
3		140.5800	43.37	-14.42	28.95	43.50	-14.55	QP	
4		213.3300	46.01	-16.56	29.45	43.50	-14.05	QP	
5		274.4400	32.11	-14.10	18.01	46.00	-27.99	QP	
6		329.7300	29.39	-12.71	16.68	46.00	-29.32	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: BYD+USB Cable: Pang Ngai +Battery: SCUD; Horizontal Rotation


Horizontal

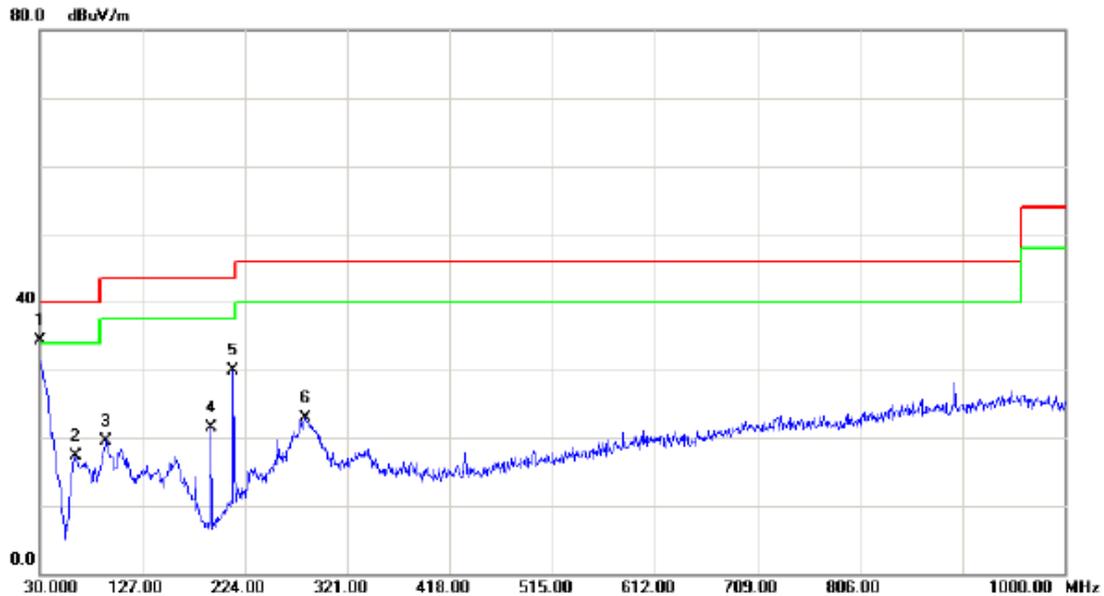

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	49.38	-15.08	34.30	40.00	-5.70	QP	
2		63.9500	32.55	-15.34	17.21	40.00	-22.79	QP	
3		93.0500	39.46	-19.86	19.60	43.50	-23.90	QP	
4		191.9900	38.14	-16.68	21.46	43.50	-22.04	QP	
5		213.3300	46.48	-16.56	29.92	43.50	-13.58	QP	
6		281.2300	36.88	-13.94	22.94	46.00	-23.06	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+(LTE)
Note:	Adapter: BYD+USB Cable: Pang Ngai +Battery: SCUD; Horizontal Rotation


Vertical

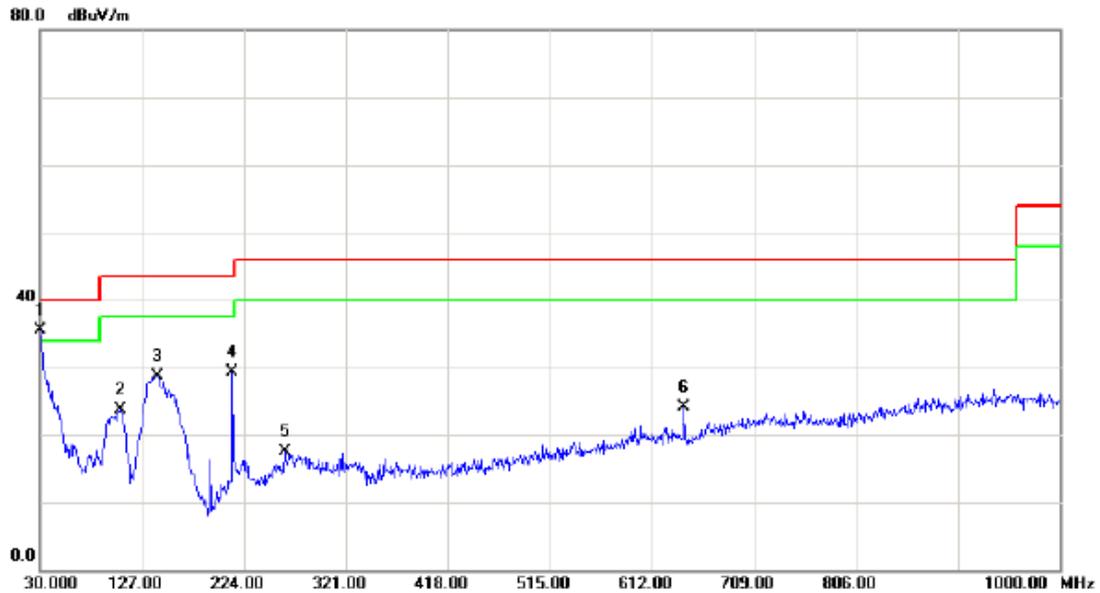

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	50.54	-15.08	35.46	40.00	-4.54	QP	
2		106.6300	41.45	-17.82	23.63	43.50	-19.87	QP	
3		141.5500	43.09	-14.38	28.71	43.50	-14.79	QP	
4		213.3300	45.84	-16.56	29.28	43.50	-14.22	QP	
5		262.8000	31.89	-14.46	17.43	46.00	-28.57	QP	
6		642.0700	31.02	-7.00	24.02	46.00	-21.98	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+(LTE)
Note:	Adapter: BYD+USB Cable: Pang Ngai +Battery: SCUD; Horizontal Rotation


Horizontal

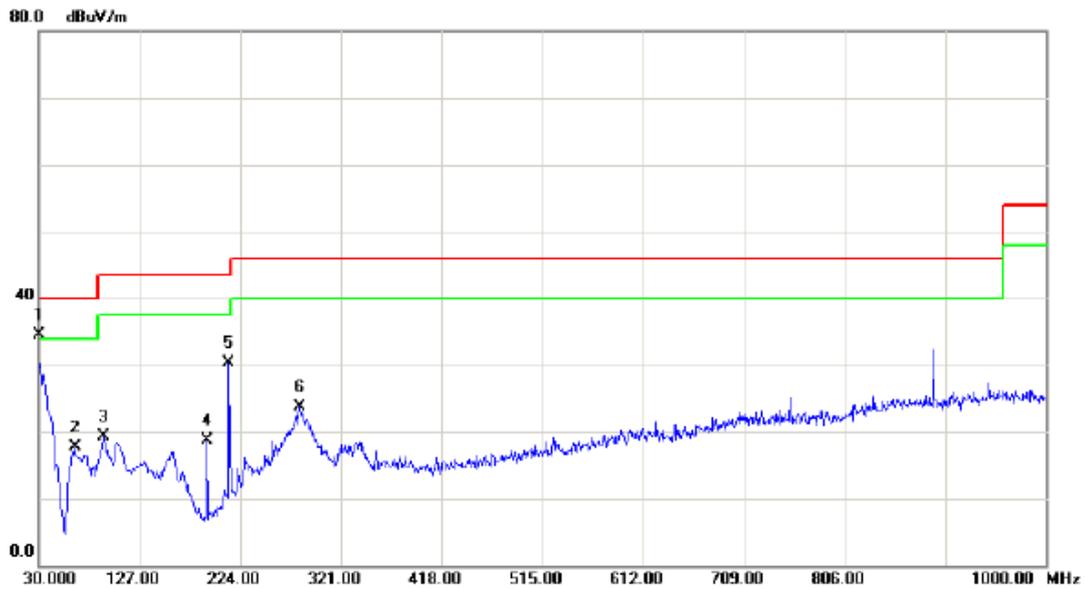

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	49.54	-15.08	34.46	40.00	-5.54	QP	
2		64.9200	33.26	-15.49	17.77	40.00	-22.23	QP	
3		92.0800	39.40	-20.00	19.40	43.50	-24.10	QP	
4		191.9900	35.44	-16.68	18.76	43.50	-24.74	QP	
5		213.3300	46.79	-16.56	30.23	43.50	-13.27	QP	
6		281.2300	37.55	-13.94	23.61	46.00	-22.39	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD; Horizontal Rotation


Vertical

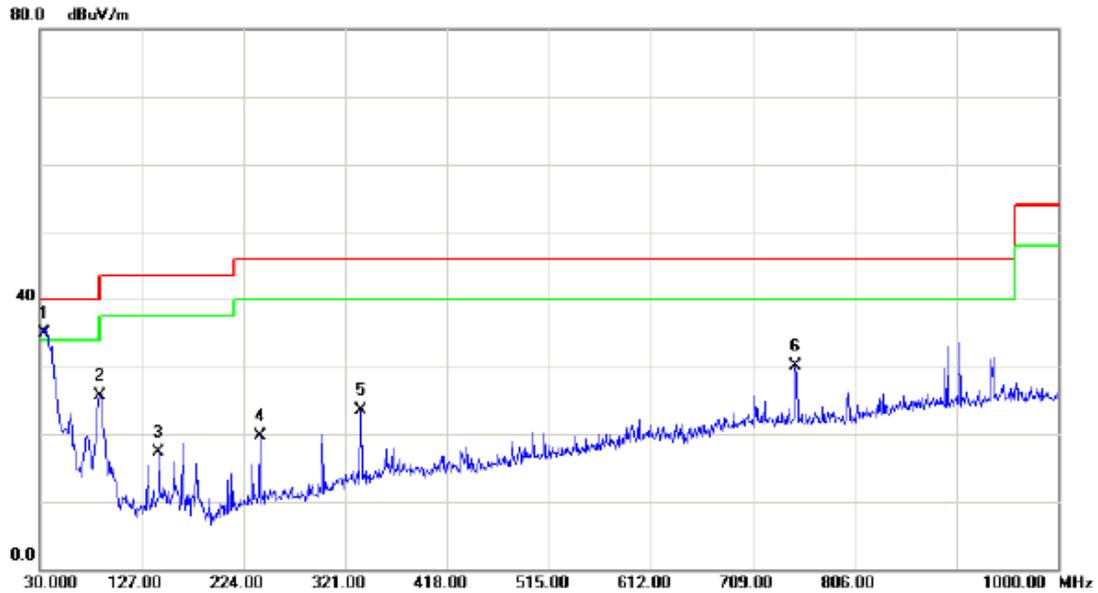

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	33.8800	50.02	-15.14	34.88	40.00	-5.12	QP	
2		87.2300	45.33	-19.70	25.63	40.00	-14.37	QP	
3		143.4900	31.59	-14.31	17.28	43.50	-26.22	QP	
4		239.5200	34.95	-15.28	19.67	46.00	-26.33	QP	
5		335.5500	36.02	-12.57	23.45	46.00	-22.55	QP	
6		749.7400	35.05	-5.01	30.04	46.00	-15.96	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD; Horizontal Rotation

Horizontal

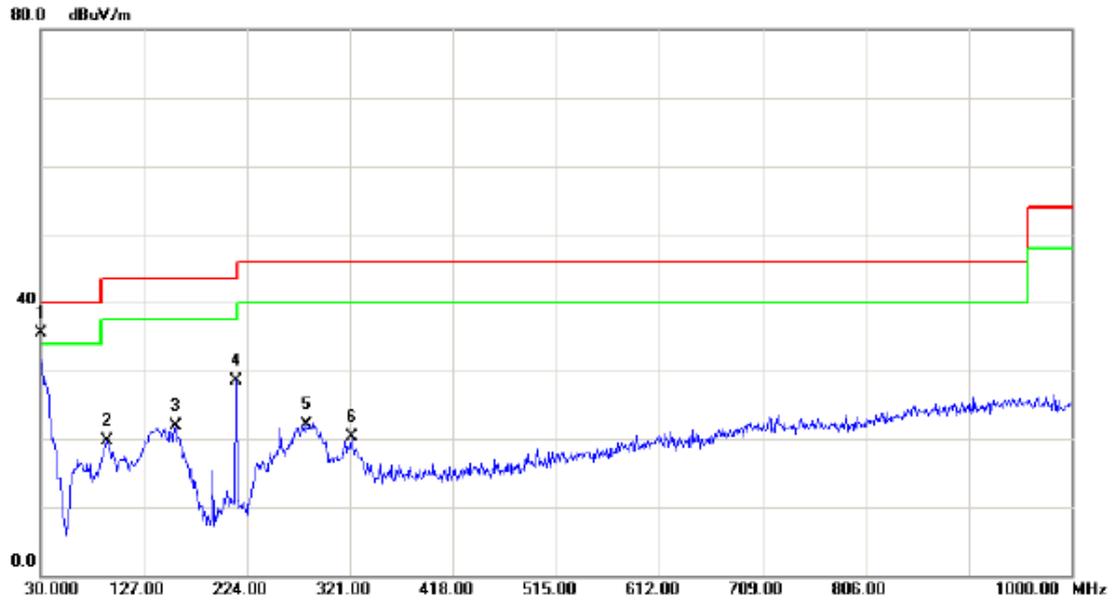


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	50.64	-15.08	35.56	40.00	-4.44	QP	
2		93.0500	39.58	-19.86	19.72	43.50	-23.78	QP	
3		157.0700	35.87	-13.96	21.91	43.50	-21.59	QP	
4		214.3000	45.12	-16.56	28.56	43.50	-14.94	QP	
5		280.2600	36.13	-13.95	22.18	46.00	-23.82	QP	
6		322.9400	33.15	-12.88	20.27	46.00	-25.73	QP	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Vertical

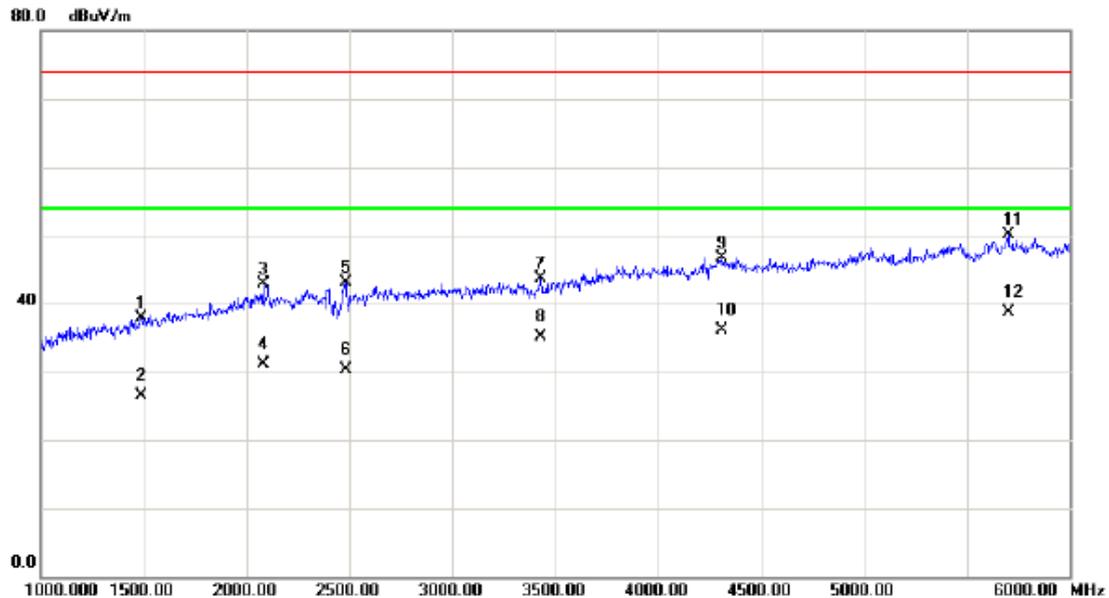

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1490.000	42.00	-4.09	37.91	74.00	-36.09	peak	
2		1490.000	30.51	-4.09	26.42	54.00	-27.58	AVG	
3		2080.000	44.38	-1.57	42.81	74.00	-31.19	peak	
4		2080.000	32.74	-1.57	31.17	54.00	-22.83	AVG	
5		2480.000	43.19	0.00	43.19	74.00	-30.81	peak	
6		2480.000	30.36	0.00	30.36	54.00	-23.64	AVG	
7		3430.000	40.89	2.84	43.73	74.00	-30.27	peak	
8		3430.000	32.30	2.84	35.14	54.00	-18.86	AVG	
9		4310.000	39.94	6.81	46.75	74.00	-27.25	peak	
10		4310.000	29.20	6.81	36.01	54.00	-17.99	AVG	
11		5700.000	40.76	9.39	50.15	74.00	-23.85	peak	
12	*	5700.000	29.25	9.39	38.64	54.00	-15.36	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Horizontal

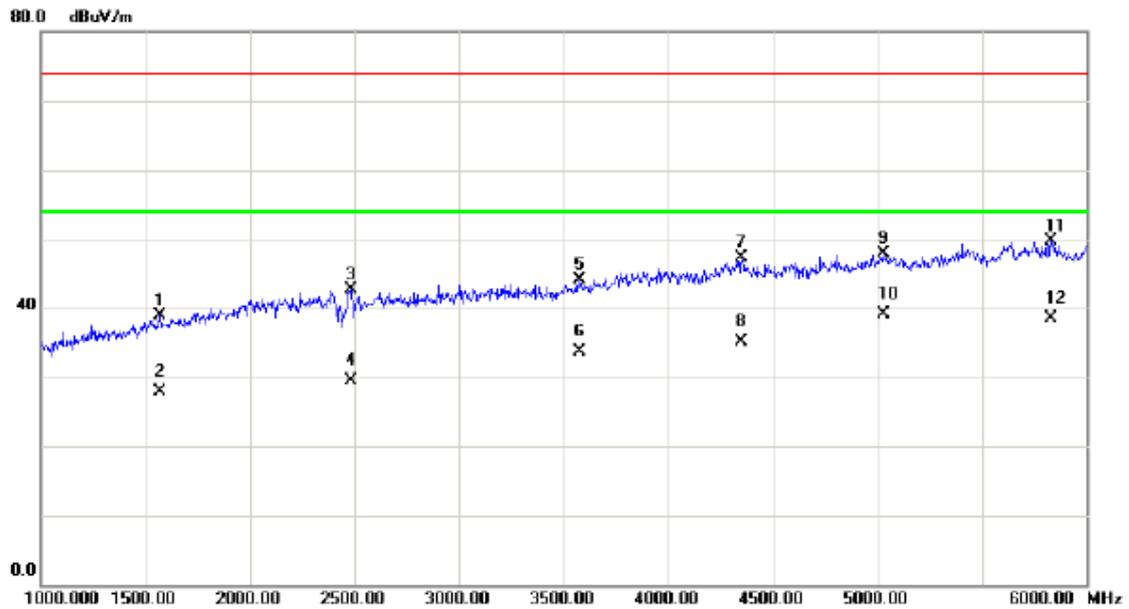

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1570.000	42.58	-3.76	38.82	74.00	-35.18	peak	
2		1570.000	31.61	-3.76	27.85	54.00	-26.15	AVG	
3		2480.000	42.77	0.00	42.77	74.00	-31.23	peak	
4		2480.000	29.59	0.00	29.59	54.00	-24.41	AVG	
5		3575.000	40.59	3.54	44.13	74.00	-29.87	peak	
6		3575.000	30.11	3.54	33.65	54.00	-20.35	AVG	
7		4350.000	40.42	6.83	47.25	74.00	-26.75	peak	
8		4350.000	28.30	6.83	35.13	54.00	-18.87	AVG	
9		5030.000	40.20	7.74	47.94	74.00	-26.06	peak	
10	*	5030.000	31.35	7.74	39.09	54.00	-14.91	AVG	
11		5830.000	40.20	9.54	49.74	74.00	-24.26	peak	
12		5830.000	28.87	9.54	38.41	54.00	-15.59	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Playing+idle
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Vertical

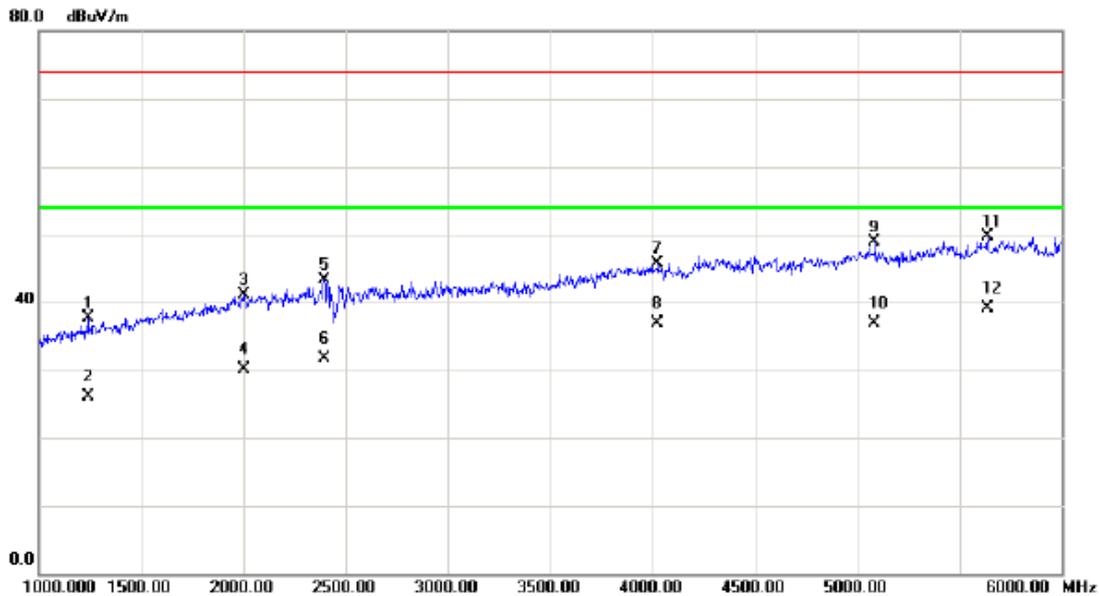

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1240.000	42.48	-4.82	37.66	74.00	-36.34	peak	
2	1240.000	30.87	-4.82	26.05	54.00	-27.95	AVG	
3	2000.000	42.89	-1.88	41.01	74.00	-32.99	peak	
4	2000.000	31.91	-1.88	30.03	54.00	-23.97	AVG	
5	2395.000	43.57	-0.34	43.23	74.00	-30.77	peak	
6	2395.000	32.11	-0.34	31.77	54.00	-22.23	AVG	
7	4025.000	39.13	6.63	45.76	74.00	-28.24	peak	
8	4025.000	30.32	6.63	36.95	54.00	-17.05	AVG	
9	5085.000	40.94	7.89	48.83	74.00	-25.17	peak	
10	5085.000	28.97	7.89	36.86	54.00	-17.14	AVG	
11	5635.000	40.35	9.30	49.65	74.00	-24.35	peak	
12 *	5635.000	29.88	9.30	39.18	54.00	-14.82	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Playing+idle
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Horizontal

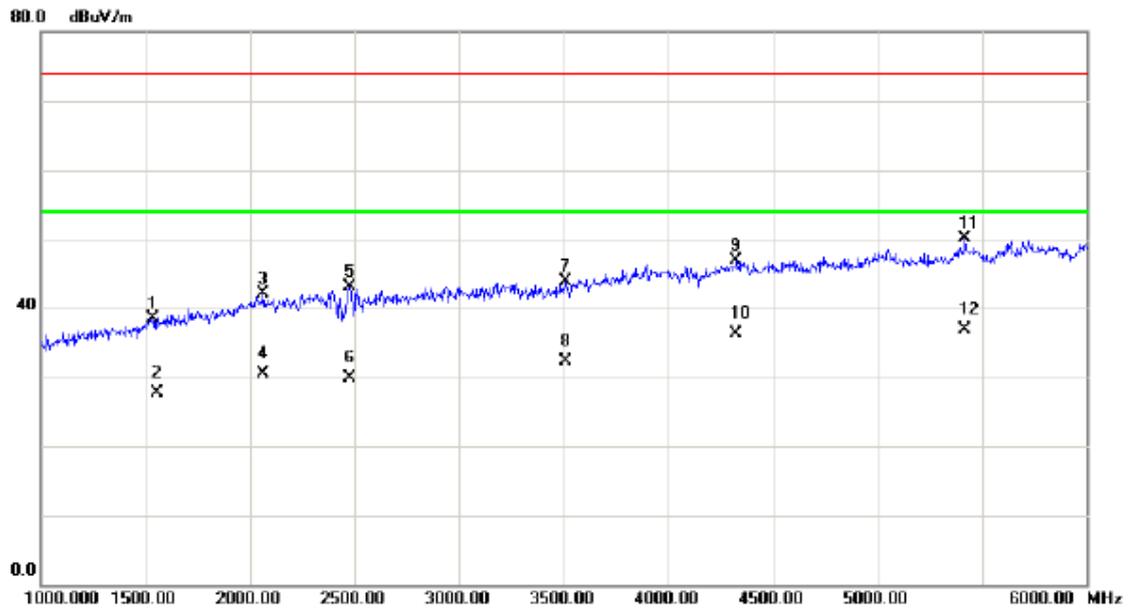

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1535.000	42.43	-3.91	38.52	74.00	-35.48	peak	
2	1555.000	31.61	-3.83	27.78	54.00	-26.22	AVG	
3	2065.000	43.72	-1.63	42.09	74.00	-31.91	peak	
4	2065.000	32.10	-1.63	30.47	54.00	-23.53	AVG	
5	2475.000	43.06	-0.02	43.04	74.00	-30.96	peak	
6	2475.000	29.88	-0.02	29.86	54.00	-24.14	AVG	
7	3510.000	40.91	3.08	43.99	74.00	-30.01	peak	
8	3510.000	29.26	3.08	32.34	54.00	-21.66	AVG	
9	4325.000	40.01	6.81	46.82	74.00	-27.18	peak	
10	4325.000	29.49	6.81	36.30	54.00	-17.70	AVG	
11	5415.000	41.29	8.89	50.18	74.00	-23.82	peak	
12 *	5415.000	28.10	8.89	36.99	54.00	-17.01	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic(GSM)+Earphone
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Vertical

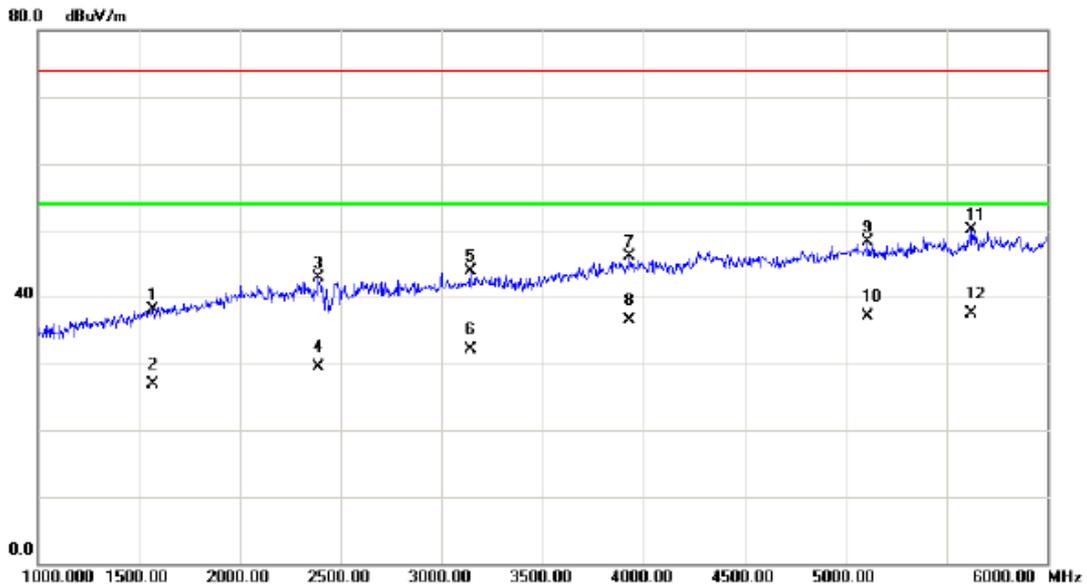

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1570.000	41.90	-3.76	38.14	74.00	-35.86	peak	
2		1570.000	30.73	-3.76	26.97	54.00	-27.03	AVG	
3		2390.000	43.34	-0.35	42.99	74.00	-31.01	peak	
4		2390.000	29.84	-0.35	29.49	54.00	-24.51	AVG	
5		3140.000	41.65	2.17	43.82	74.00	-30.18	peak	
6		3140.000	29.96	2.17	32.13	54.00	-21.87	AVG	
7		3930.000	39.94	6.11	46.05	74.00	-27.95	peak	
8		3930.000	30.48	6.11	36.59	54.00	-17.41	AVG	
9		5110.000	40.24	7.97	48.21	74.00	-25.79	peak	
10		5110.000	29.08	7.97	37.05	54.00	-16.95	AVG	
11		5620.000	40.91	9.29	50.20	74.00	-23.80	peak	
12	*	5620.000	28.24	9.29	37.53	54.00	-16.47	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic(GSM)+Earphone
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Horizontal

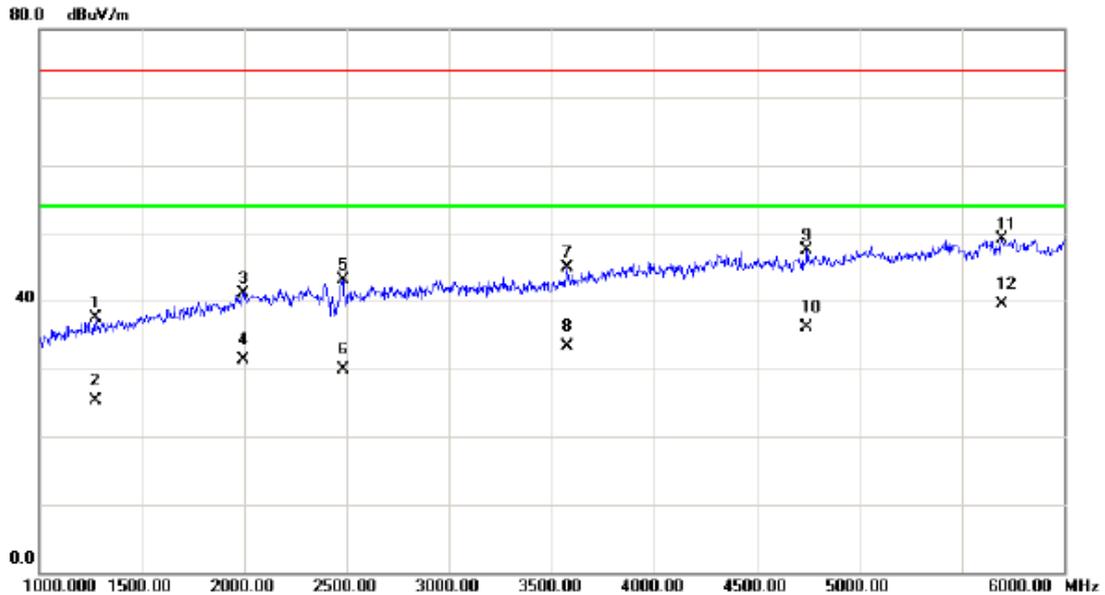

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1275.000	42.16	-4.74	37.42	74.00	-36.58	peak	
2		1275.000	30.03	-4.74	25.29	54.00	-28.71	AVG	
3		1995.000	43.06	-1.90	41.16	74.00	-32.84	peak	
4		1995.000	33.16	-1.90	31.26	54.00	-22.74	AVG	
5		2480.000	43.08	0.00	43.08	74.00	-30.92	peak	
6		2480.000	29.99	0.00	29.99	54.00	-24.01	AVG	
7		3575.000	41.32	3.54	44.86	74.00	-29.14	peak	
8		3575.000	29.73	3.54	33.27	54.00	-20.73	AVG	
9		4745.000	40.21	7.27	47.48	74.00	-26.52	peak	
10		4745.000	28.85	7.27	36.12	54.00	-17.88	AVG	
11		5695.000	39.81	9.37	49.18	74.00	-24.82	peak	
12	*	5695.000	30.08	9.37	39.45	54.00	-14.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Vertical

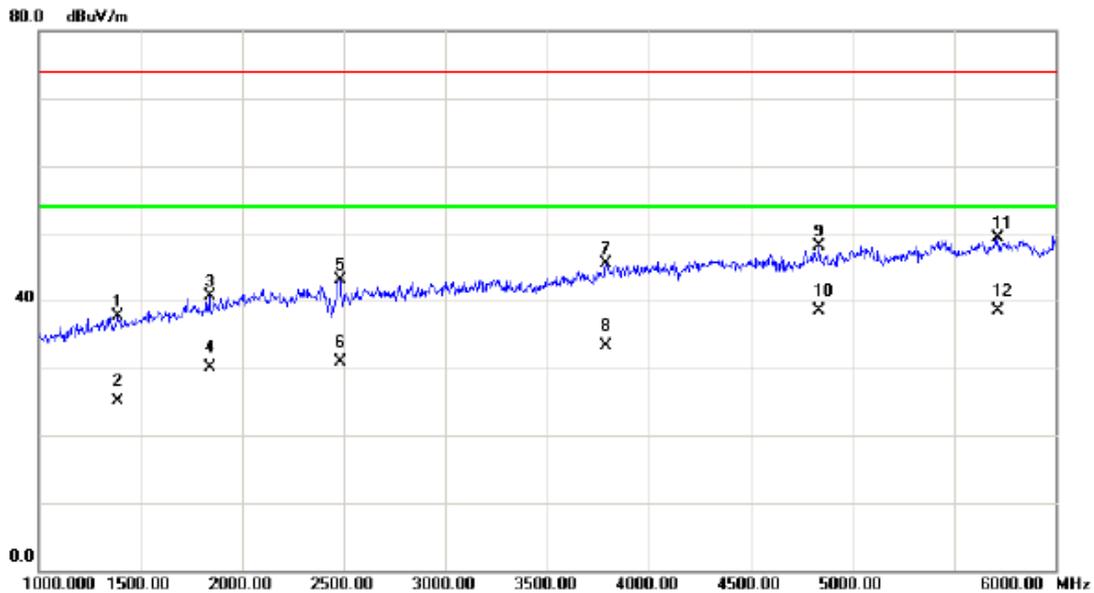

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1390.000	42.05	-4.38	37.67	74.00	-36.33	peak	
2		1390.000	29.49	-4.38	25.11	54.00	-28.89	AVG	
3		1840.000	43.36	-2.58	40.78	74.00	-33.22	peak	
4		1840.000	32.75	-2.58	30.17	54.00	-23.83	AVG	
5		2480.000	43.15	0.00	43.15	74.00	-30.85	peak	
6		2480.000	30.99	0.00	30.99	54.00	-23.01	AVG	
7		3790.000	40.45	5.10	45.55	74.00	-28.45	peak	
8		3790.000	28.22	5.10	33.32	54.00	-20.68	AVG	
9		4835.000	40.70	7.41	48.11	74.00	-25.89	peak	
10		4835.000	31.05	7.41	38.46	54.00	-15.54	AVG	
11		5715.000	39.98	9.41	49.39	74.00	-24.61	peak	
12	*	5715.000	29.06	9.41	38.47	54.00	-15.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Horizontal

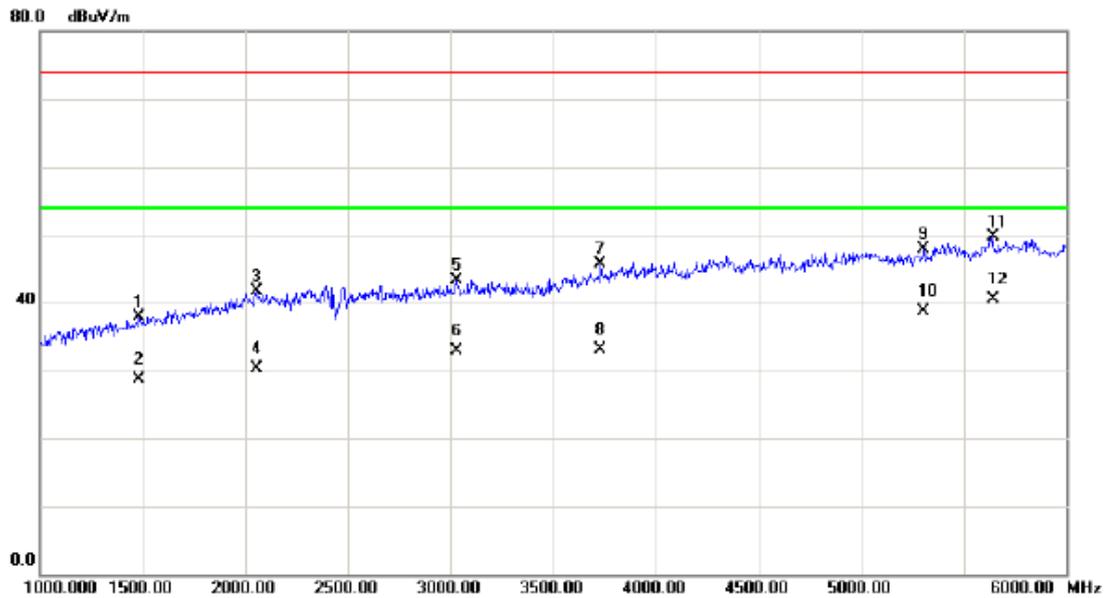

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1480.000	42.09	-4.12	37.97	74.00	-36.03	peak	
2		1480.000	32.81	-4.12	28.69	54.00	-25.31	AVG	
3		2055.000	43.38	-1.66	41.72	74.00	-32.28	peak	
4		2055.000	32.03	-1.66	30.37	54.00	-23.63	AVG	
5		3030.000	41.39	1.91	43.30	74.00	-30.70	peak	
6		3030.000	30.90	1.91	32.81	54.00	-21.19	AVG	
7		3730.000	40.96	4.66	45.62	74.00	-28.38	peak	
8		3730.000	28.46	4.66	33.12	54.00	-20.88	AVG	
9		5305.000	39.41	8.56	47.97	74.00	-26.03	peak	
10		5305.000	30.12	8.56	38.68	54.00	-15.32	AVG	
11		5640.000	40.30	9.31	49.61	74.00	-24.39	peak	
12	*	5640.000	31.27	9.31	40.58	54.00	-13.42	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+(LTE)
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Vertical

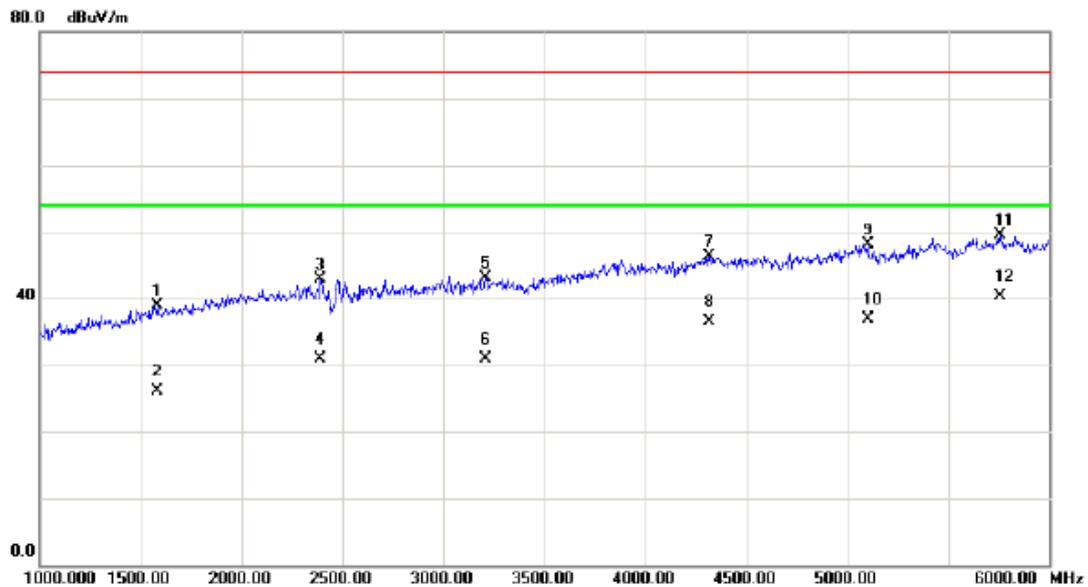

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1585.000	42.60	-3.69	38.91	74.00	-35.09	peak	
2		1585.000	29.77	-3.69	26.08	54.00	-27.92	AVG	
3		2390.000	43.30	-0.35	42.95	74.00	-31.05	peak	
4		2390.000	31.24	-0.35	30.89	54.00	-23.11	AVG	
5		3210.000	40.85	2.33	43.18	74.00	-30.82	peak	
6		3210.000	28.56	2.33	30.89	54.00	-23.11	AVG	
7		4315.000	39.52	6.81	46.33	74.00	-27.67	peak	
8		4315.000	29.60	6.81	36.41	54.00	-17.59	AVG	
9		5100.000	40.21	7.94	48.15	74.00	-25.85	peak	
10		5100.000	28.91	7.94	36.85	54.00	-17.15	AVG	
11		5755.000	40.03	9.45	49.48	74.00	-24.52	peak	
12	*	5755.000	30.89	9.45	40.34	54.00	-13.66	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+(LTE)
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Horizontal

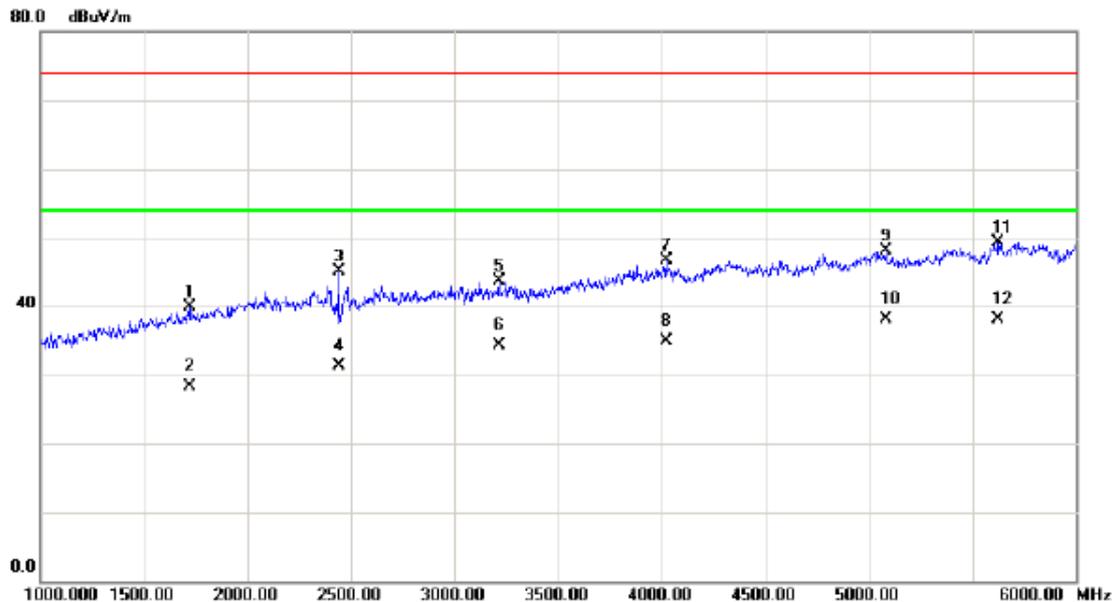

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1725.000	43.00	-3.07	39.93	74.00	-34.07	peak	
2	1725.000	31.43	-3.07	28.36	54.00	-25.64	AVG	
3	2440.000	45.30	-0.16	45.14	74.00	-28.86	peak	
4	2440.000	31.50	-0.16	31.34	54.00	-22.66	AVG	
5	3215.000	41.39	2.34	43.73	74.00	-30.27	peak	
6	3215.000	32.05	2.34	34.39	54.00	-19.61	AVG	
7	4020.000	40.05	6.63	46.68	74.00	-27.32	peak	
8	4020.000	28.20	6.63	34.83	54.00	-19.17	AVG	
9	5080.000	40.30	7.89	48.19	74.00	-25.81	peak	
10	5080.000	30.12	7.89	38.01	54.00	-15.99	AVG	
11	5625.000	39.97	9.30	49.27	74.00	-24.73	peak	
12 *	5625.000	28.75	9.30	38.05	54.00	-15.95	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Vertical

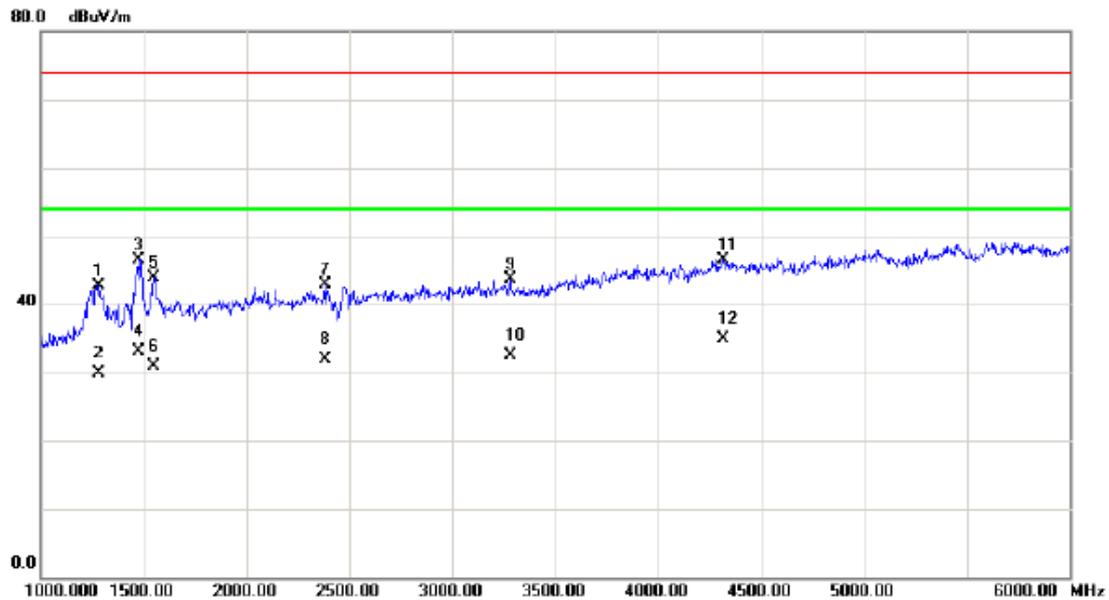

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1285.000	47.43	-4.70	42.73	74.00	-31.27	peak	
2		1285.000	34.63	-4.70	29.93	54.00	-24.07	AVG	
3		1475.000	50.69	-4.14	46.55	74.00	-27.45	peak	
4		1475.000	37.33	-4.14	33.19	54.00	-20.81	AVG	
5		1550.000	47.84	-3.84	44.00	74.00	-30.00	peak	
6		1550.000	34.68	-3.84	30.84	54.00	-23.16	AVG	
7		2380.000	43.35	-0.39	42.96	74.00	-31.04	peak	
8		2380.000	32.23	-0.39	31.84	54.00	-22.16	AVG	
9		3280.000	41.20	2.49	43.69	74.00	-30.31	peak	
10		3280.000	30.08	2.49	32.57	54.00	-21.43	AVG	
11		4315.000	39.68	6.81	46.49	74.00	-27.51	peak	
12	*	4315.000	28.12	6.81	34.93	54.00	-19.07	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Horizontal

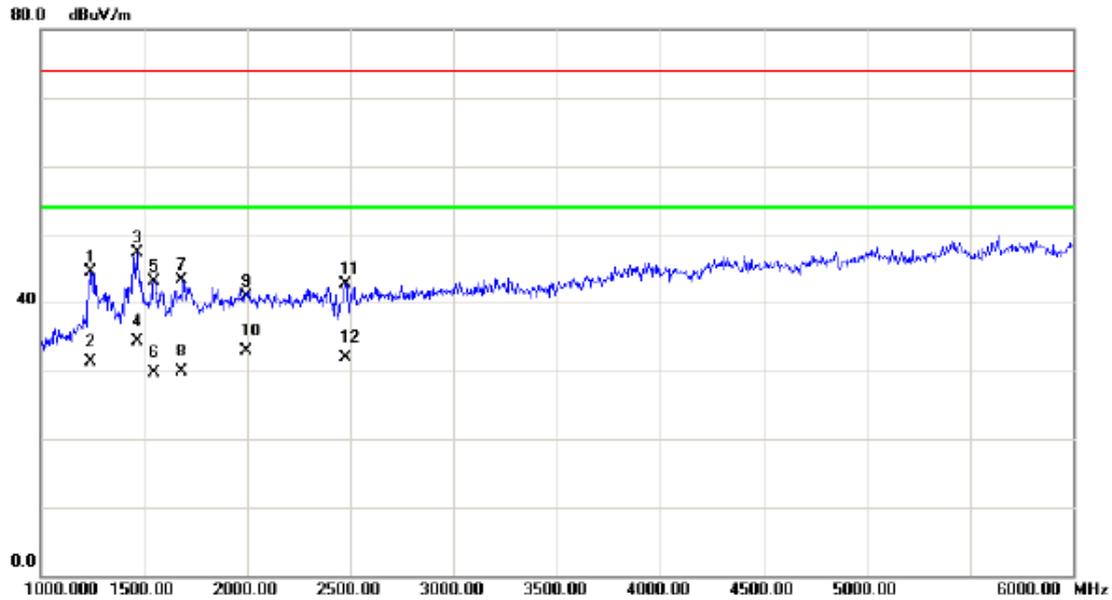

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1245.000	49.24	-4.81	44.43	74.00	-29.57	peak	
2	1245.000	36.10	-4.81	31.29	54.00	-22.71	AVG	
3	1470.000	51.53	-4.15	47.38	74.00	-26.62	peak	
4 *	1470.000	38.49	-4.15	34.34	54.00	-19.66	AVG	
5	1550.000	46.89	-3.84	43.05	74.00	-30.95	peak	
6	1550.000	33.57	-3.84	29.73	54.00	-24.27	AVG	
7	1685.000	46.50	-3.26	43.24	74.00	-30.76	peak	
8	1685.000	33.14	-3.26	29.88	54.00	-24.12	AVG	
9	1995.000	42.78	-1.90	40.88	74.00	-33.12	peak	
10	1995.000	34.82	-1.90	32.92	54.00	-21.08	AVG	
11	2475.000	42.65	-0.02	42.63	74.00	-31.37	peak	
12	2475.000	32.01	-0.02	31.99	54.00	-22.01	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Vertical

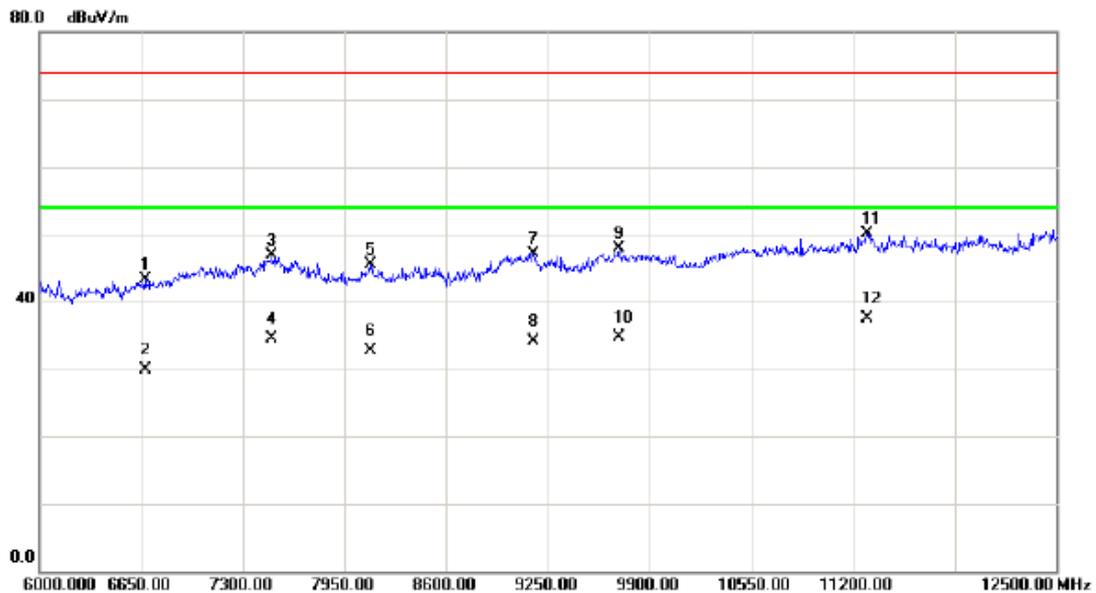

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6676.000	30.62	12.59	43.21	74.00	-30.79	peak	
2		6676.000	17.31	12.59	29.90	54.00	-24.10	AVG	
3		7488.500	30.94	15.93	46.87	74.00	-27.13	peak	
4		7488.500	18.52	15.93	34.45	54.00	-19.55	AVG	
5		8119.000	29.52	15.92	45.44	74.00	-28.56	peak	
6		8119.000	16.71	15.92	32.63	54.00	-21.37	AVG	
7		9159.000	31.27	15.85	47.12	74.00	-26.88	peak	
8		9159.000	18.16	15.85	34.01	54.00	-19.99	AVG	
9		9705.000	32.30	15.53	47.83	74.00	-26.17	peak	
10		9705.000	19.20	15.53	34.73	54.00	-19.27	AVG	
11		11291.00	29.77	20.24	50.01	74.00	-23.99	peak	
12	*	11291.00	17.32	20.24	37.56	54.00	-16.44	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Camera on+idle+BT+WiFi+GPS
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc (black)+Battery: SCUD


Horizontal

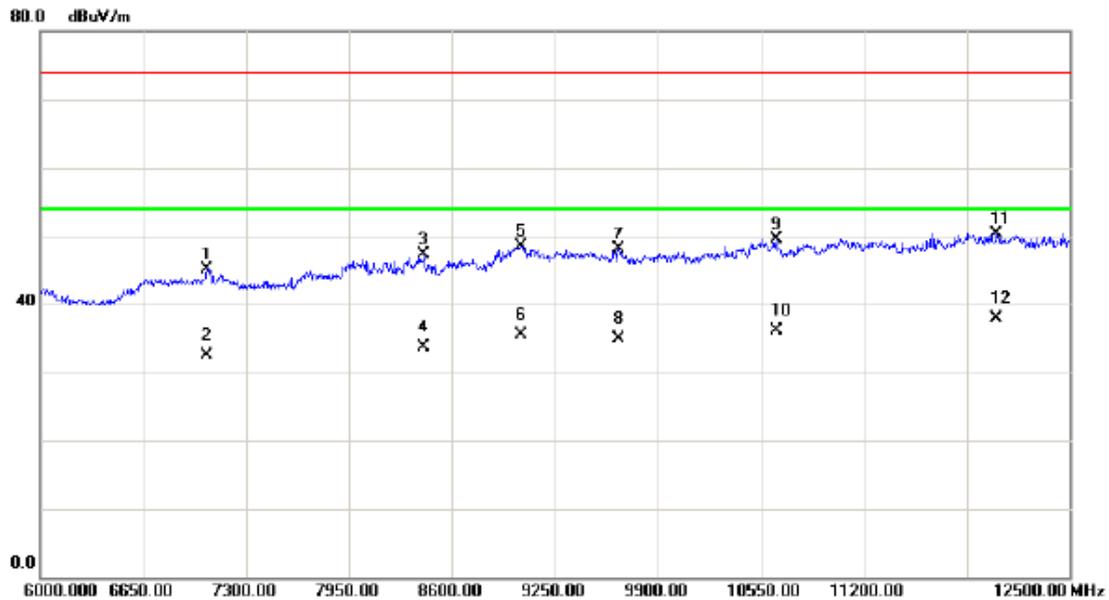

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7053.000	31.09	14.11	45.20	74.00	-28.80	peak	
2	7053.000	18.34	14.11	32.45	54.00	-21.55	AVG	
3	8424.500	31.75	15.50	47.25	74.00	-26.75	peak	
4	8424.500	18.29	15.50	33.79	54.00	-20.21	AVG	
5	9035.500	32.50	16.10	48.60	74.00	-25.40	peak	
6	9035.500	19.36	16.10	35.46	54.00	-18.54	AVG	
7	9653.000	32.65	15.44	48.09	74.00	-25.91	peak	
8	9653.000	19.44	15.44	34.88	54.00	-19.12	AVG	
9	10647.500	33.57	15.89	49.46	74.00	-24.54	peak	
10	10647.500	20.15	15.89	36.04	54.00	-17.96	AVG	
11	12038.500	27.51	22.89	50.40	74.00	-23.60	peak	
12 *	12038.500	15.02	22.89	37.91	54.00	-16.09	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+(LTE)
Note:	Adapter: BYD+USB Cable: Pang Ngai +Battery: SCUD


Vertical

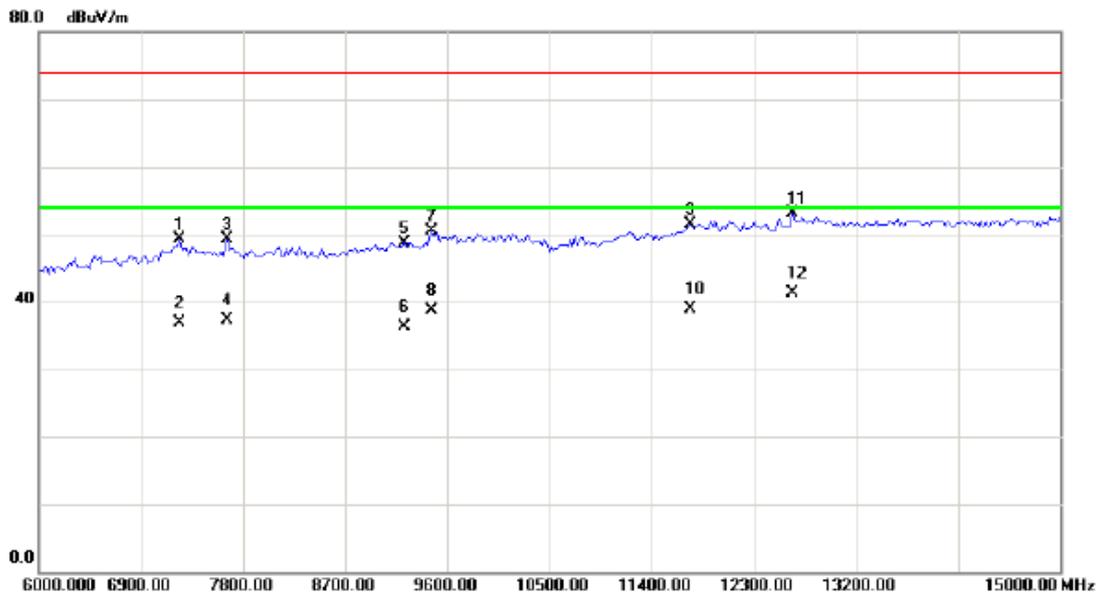

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7237.500	34.35	14.87	49.22	74.00	-24.78	peak	
2		7237.500	21.95	14.87	36.82	54.00	-17.18	AVG	
3		7665.000	33.20	16.02	49.22	74.00	-24.78	peak	
4		7665.000	21.31	16.02	37.33	54.00	-16.67	AVG	
5		9217.500	33.07	15.73	48.80	74.00	-25.20	peak	
6		9217.500	20.52	15.73	36.25	54.00	-17.75	AVG	
7		9465.000	35.30	15.24	50.54	74.00	-23.46	peak	
8		9465.000	23.43	15.24	38.67	54.00	-15.33	AVG	
9		11737.500	29.79	21.65	51.44	74.00	-22.56	peak	
10		11737.500	17.23	21.65	38.88	54.00	-15.12	AVG	
11		12637.500	34.29	18.83	53.12	74.00	-20.88	peak	
12	*	12637.500	22.54	18.83	41.37	54.00	-12.63	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+(LTE)
Note:	Adapter: BYD+USB Cable: Pang Ngai +Battery: SCUD

Horizontal

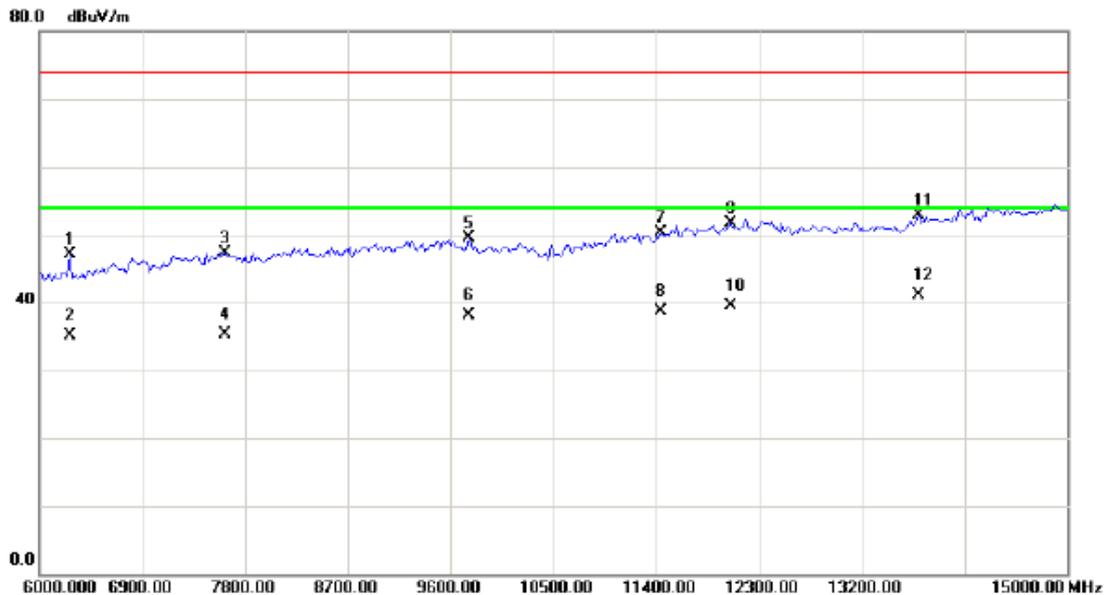

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	6270.000	36.12	10.90	47.02	74.00	-26.98	peak	
2	6270.000	24.27	10.90	35.17	54.00	-18.83	AVG	
3	7620.000	31.40	16.00	47.40	74.00	-26.60	peak	
4	7620.000	19.29	16.00	35.29	54.00	-18.71	AVG	
5	9757.500	33.81	15.63	49.44	74.00	-24.56	peak	
6	9757.500	22.49	15.63	38.12	54.00	-15.88	AVG	
7	11445.000	30.14	20.17	50.31	74.00	-23.69	peak	
8	11445.000	18.62	20.17	38.79	54.00	-15.21	AVG	
9	12052.500	28.99	22.73	51.72	74.00	-22.28	peak	
10	12052.500	16.79	22.73	39.52	54.00	-14.48	AVG	
11	13695.000	29.15	23.69	52.84	74.00	-21.16	peak	
12 *	13695.000	17.44	23.69	41.13	54.00	-12.87	AVG	