





2.4 11G_L_2412@Ant 1


Pref:



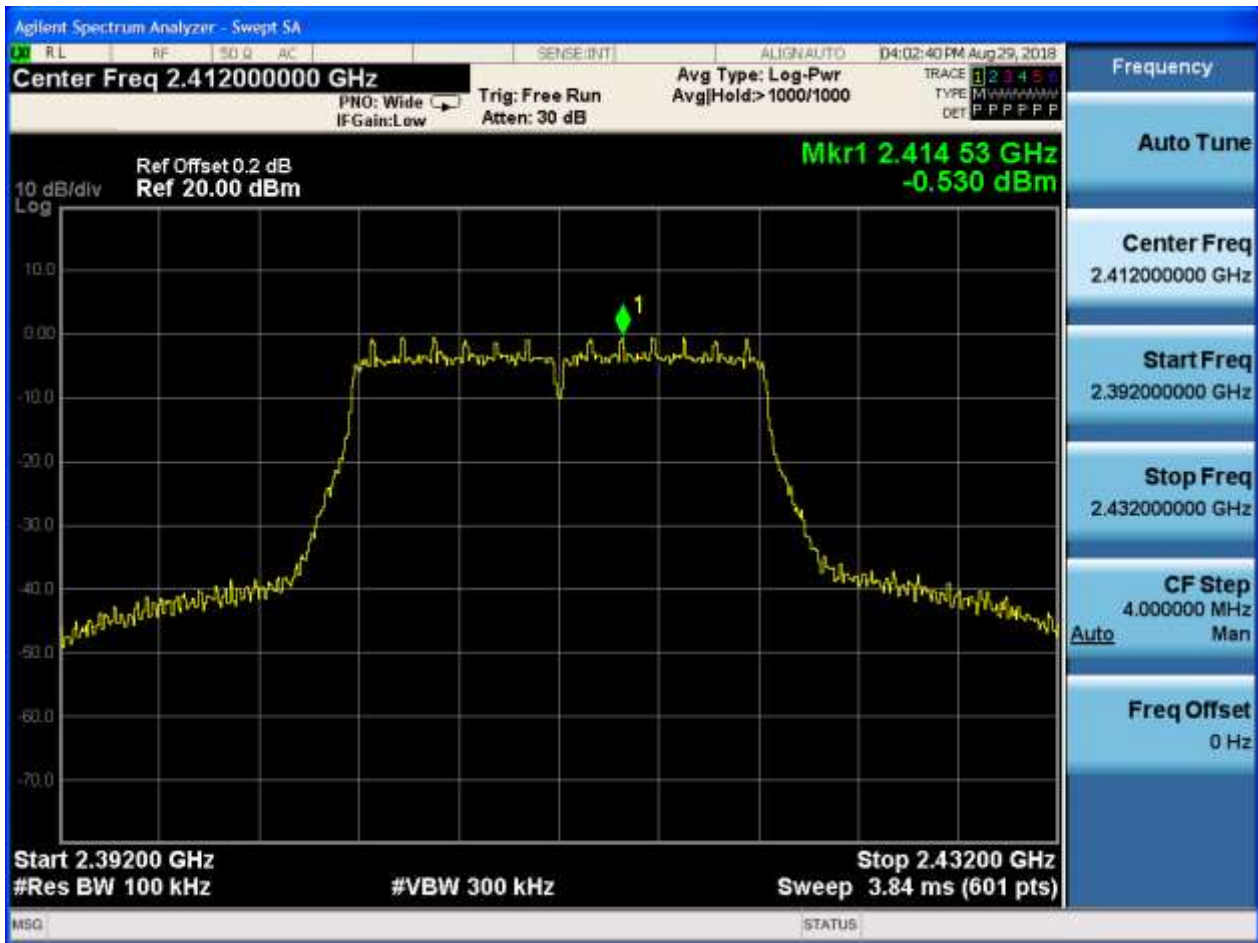

Puw:

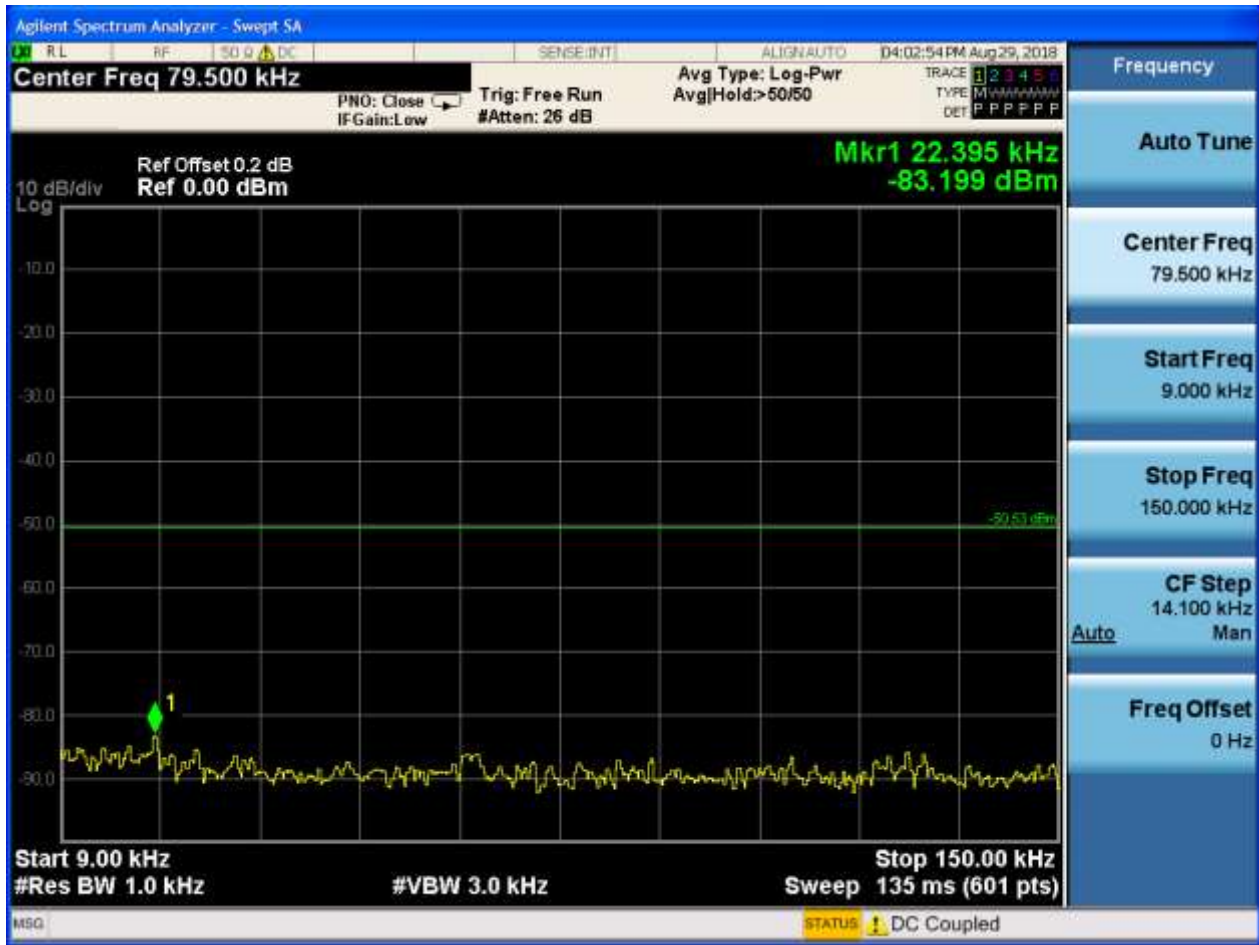

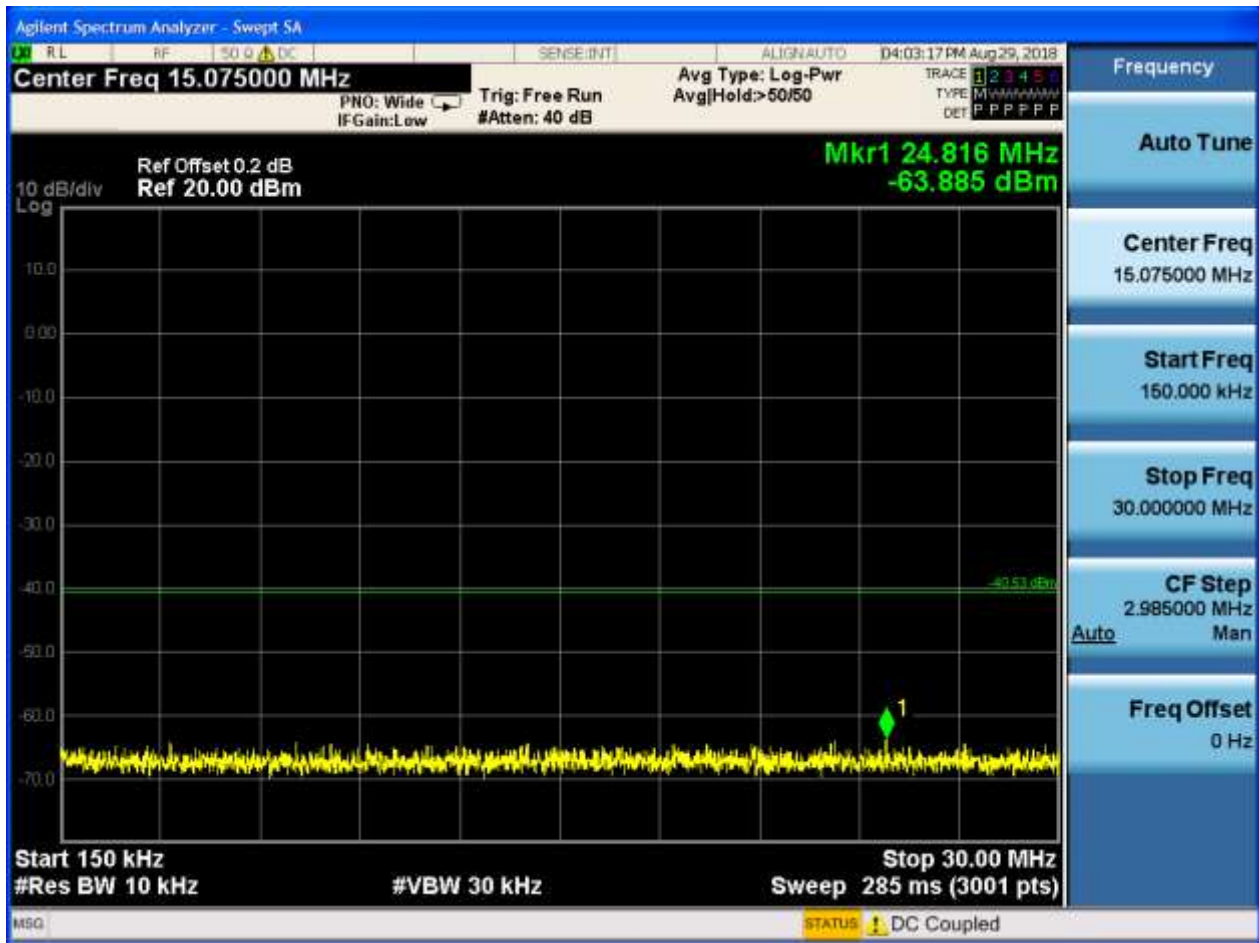













2.5 11G_L_2417@Ant 1


Pref:

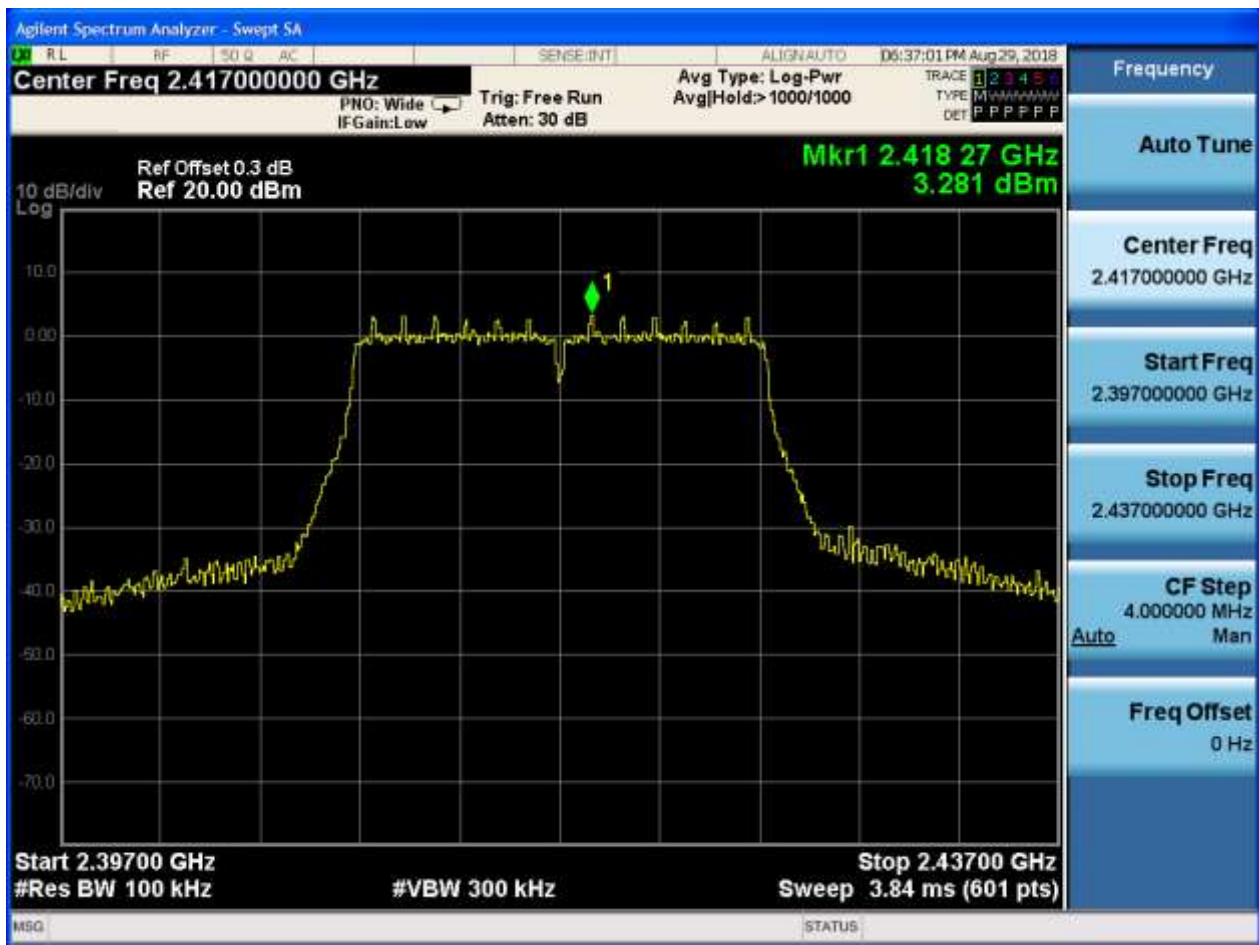





Puw:

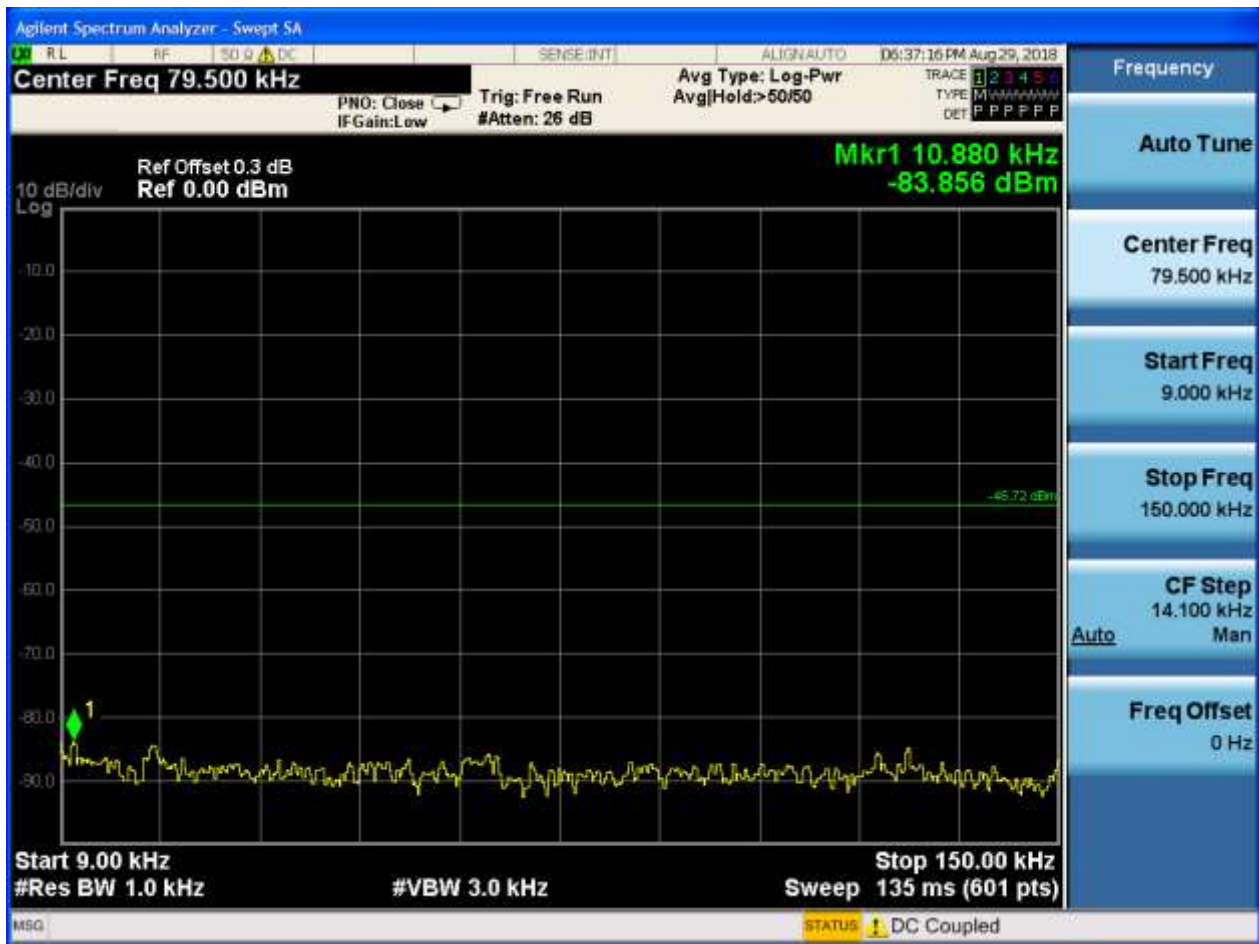

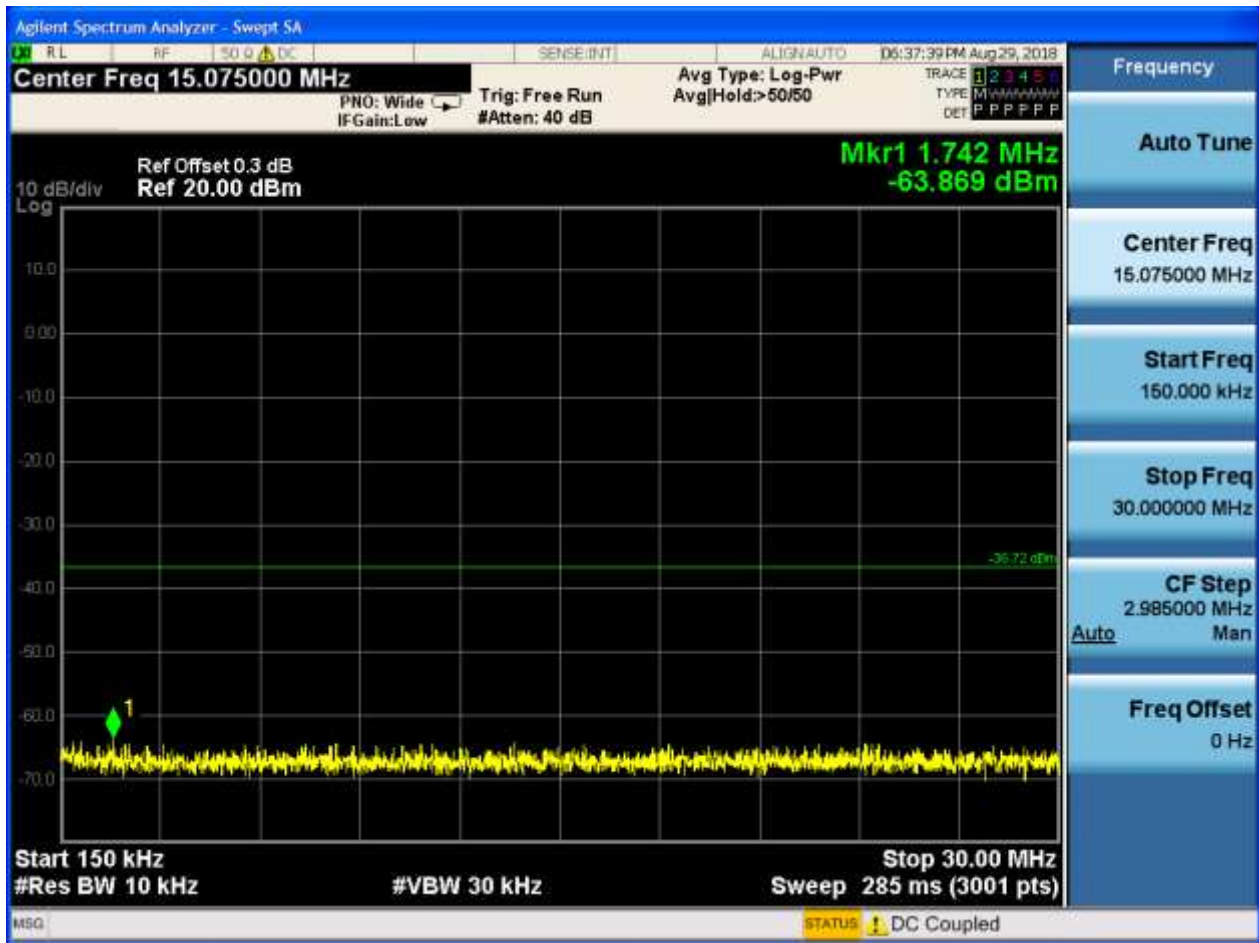

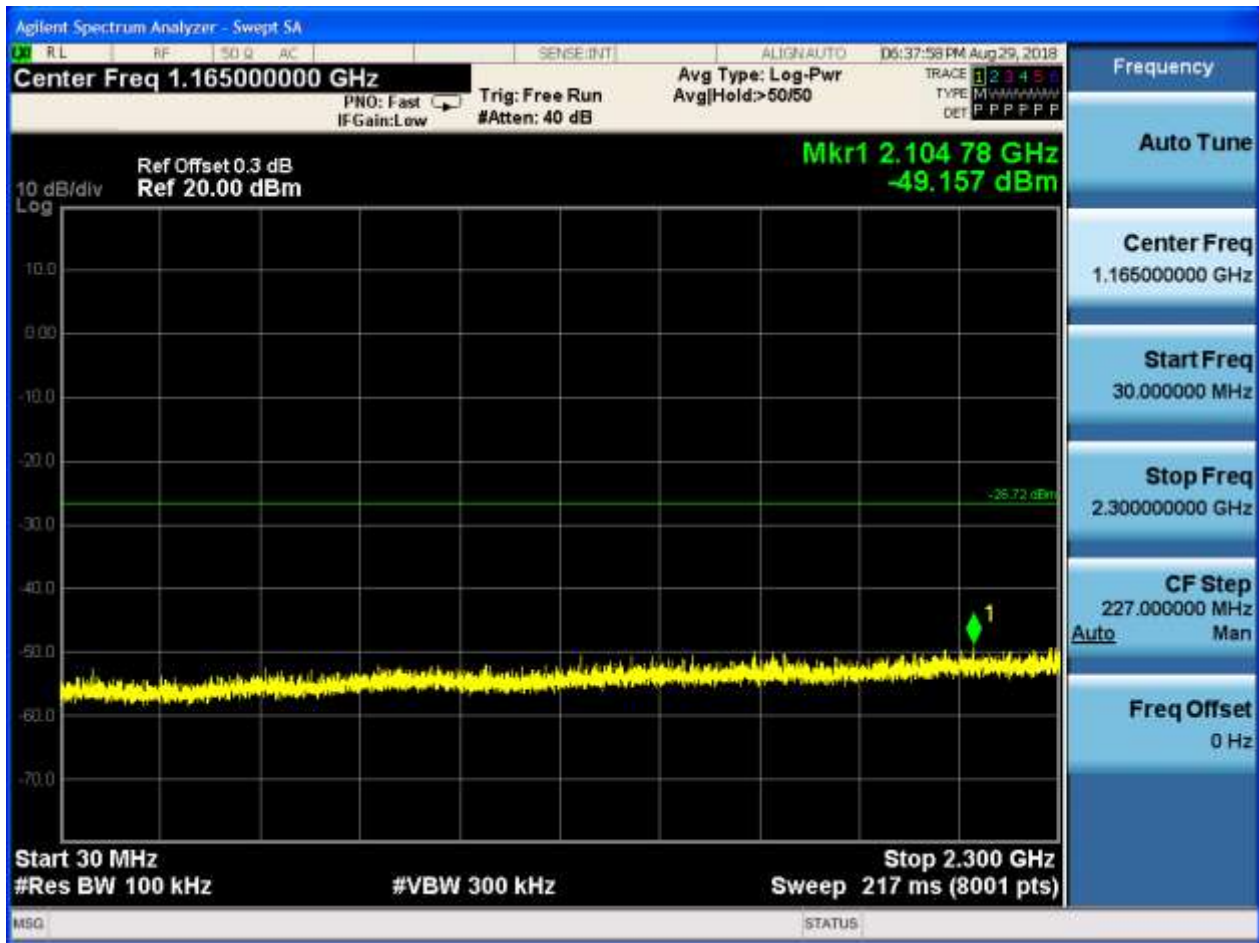



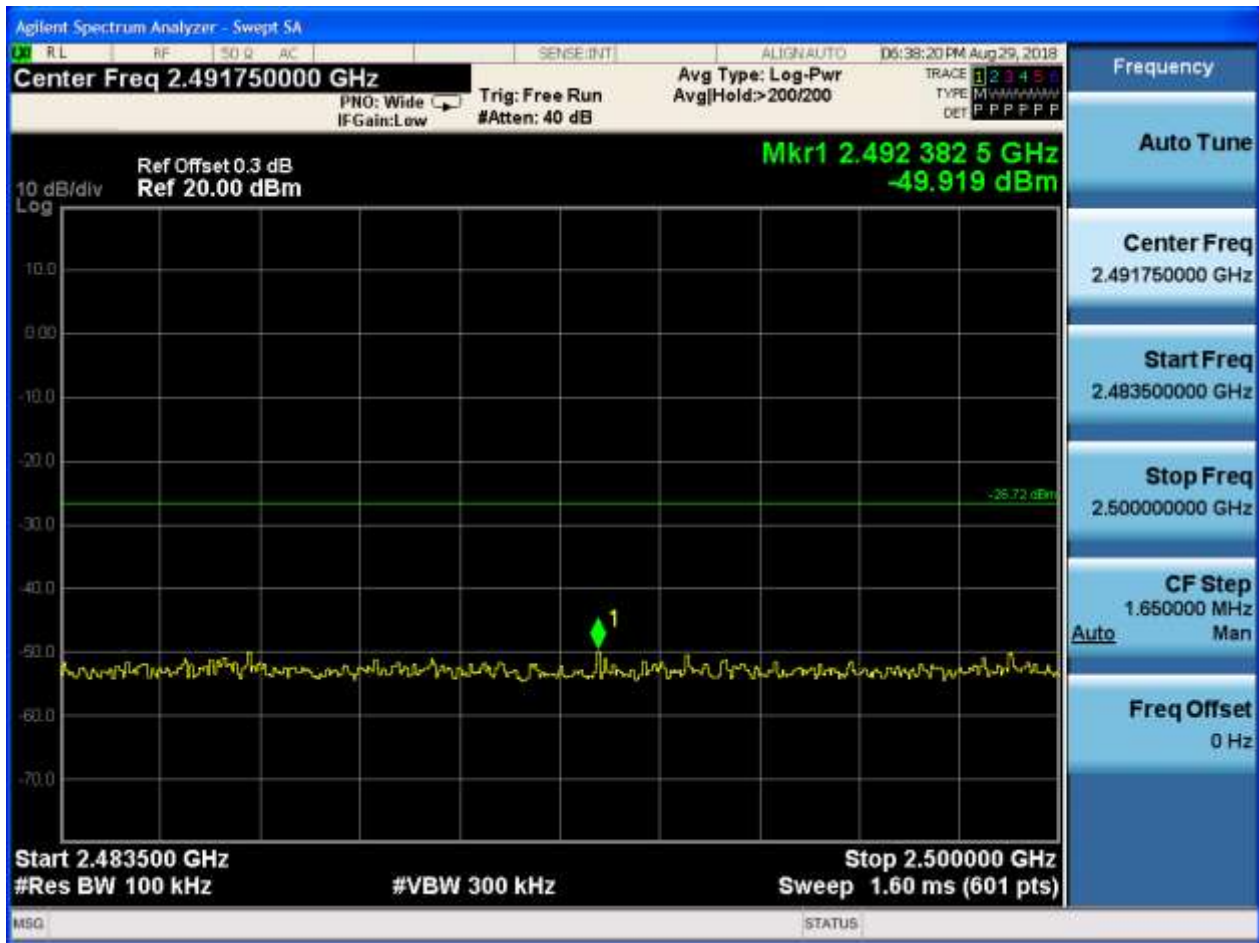









2.6 11G_M_2437@Ant 1


Pref:

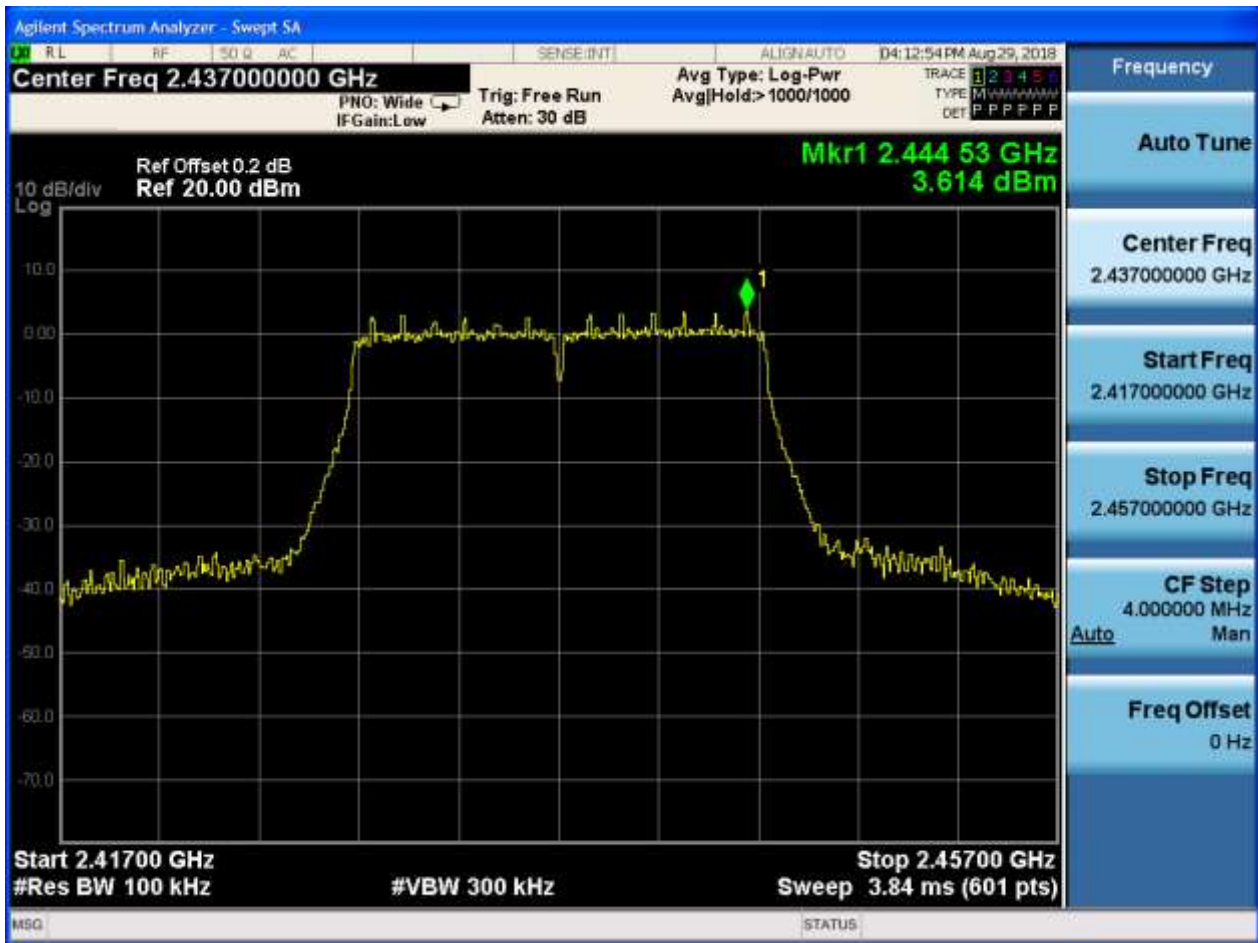


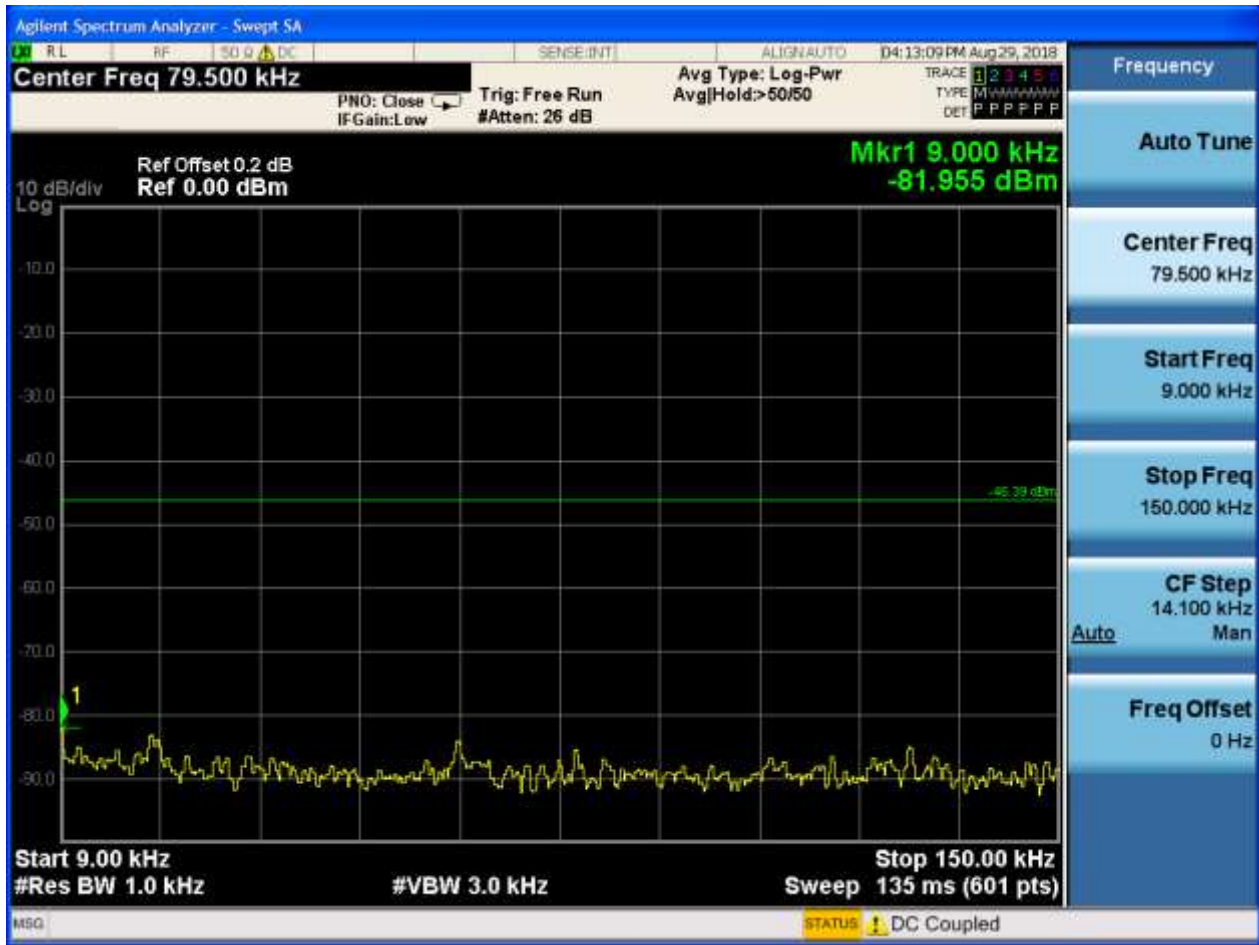P_uw:

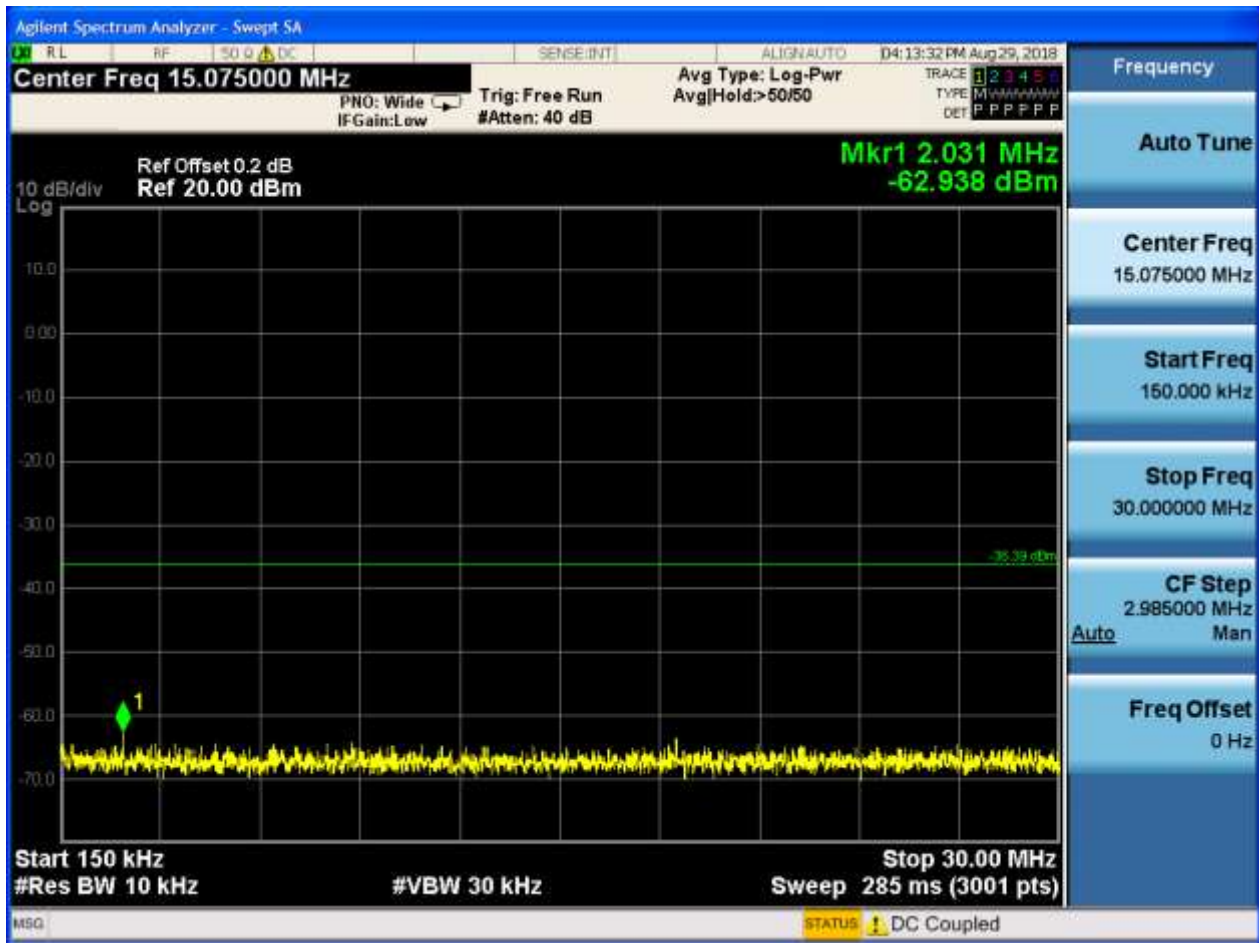

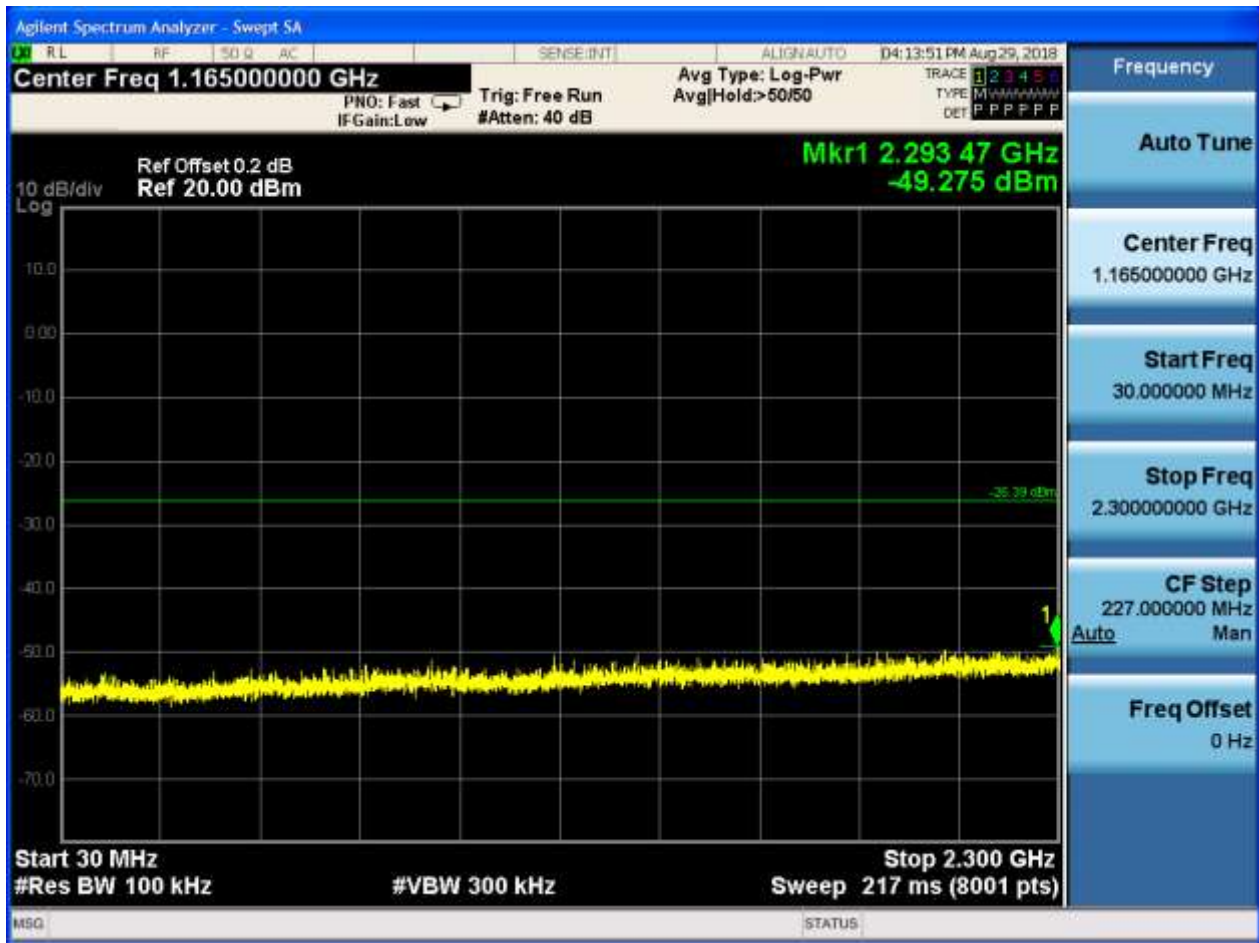

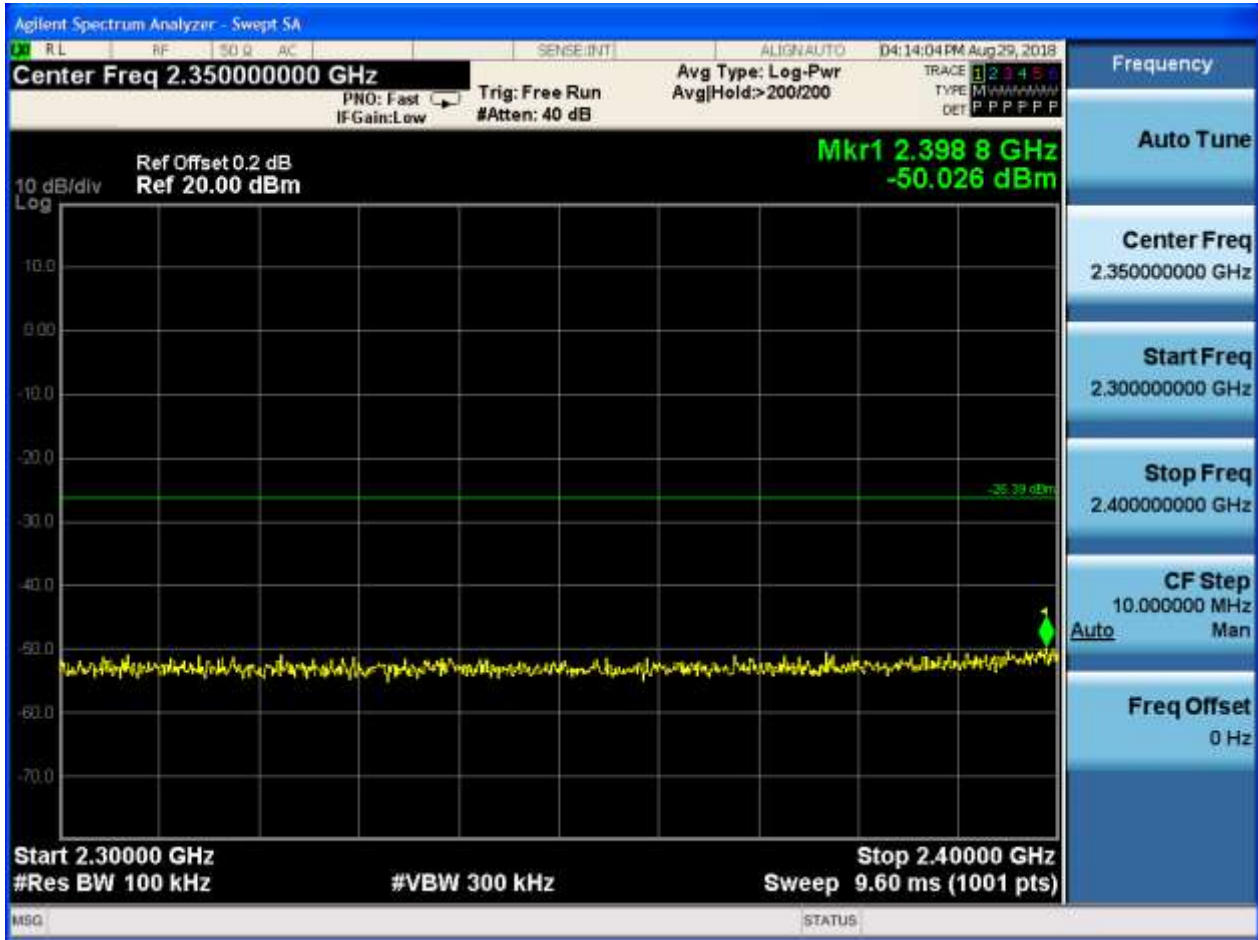

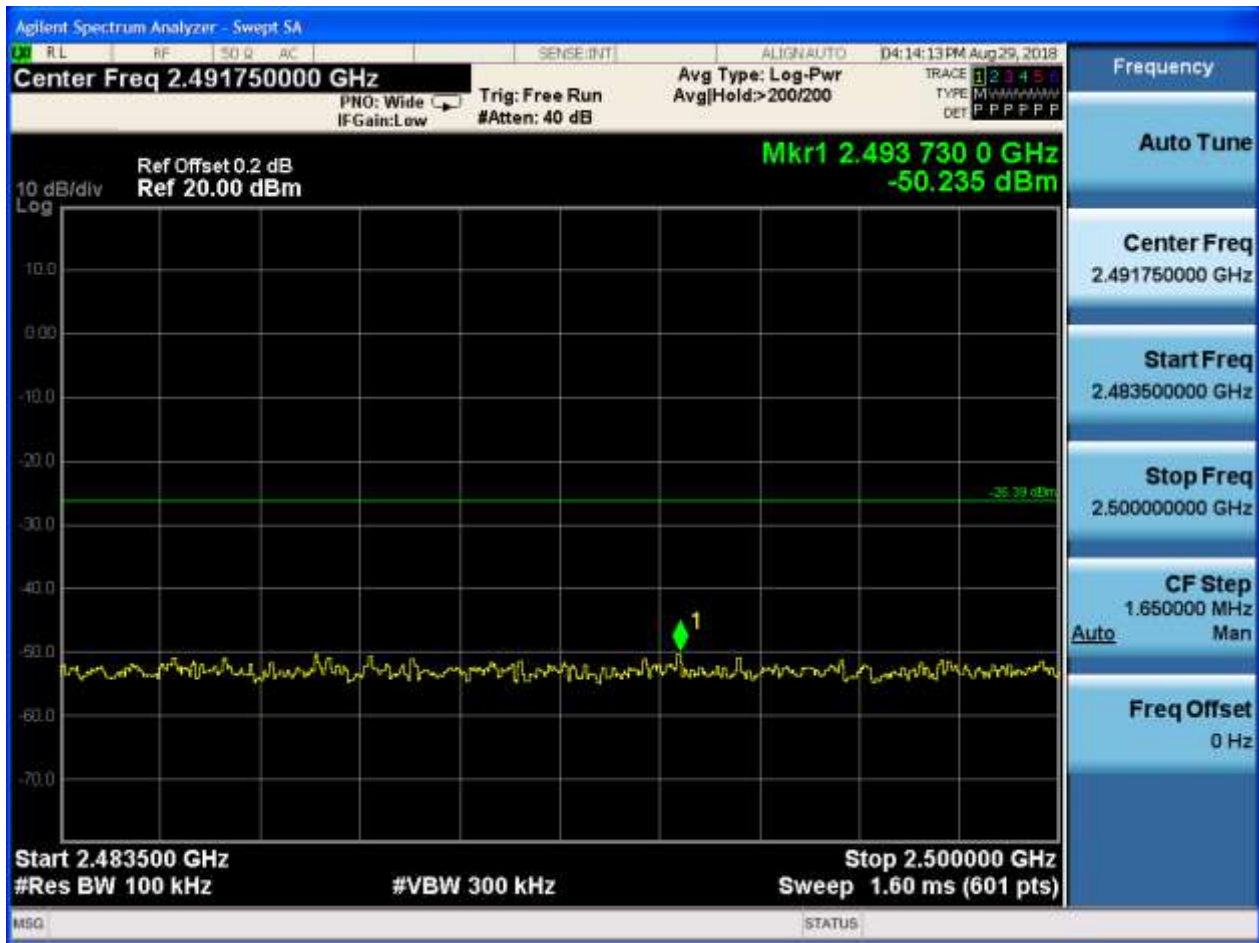







2.7 11G_H_2457@Ant 1


Pref:

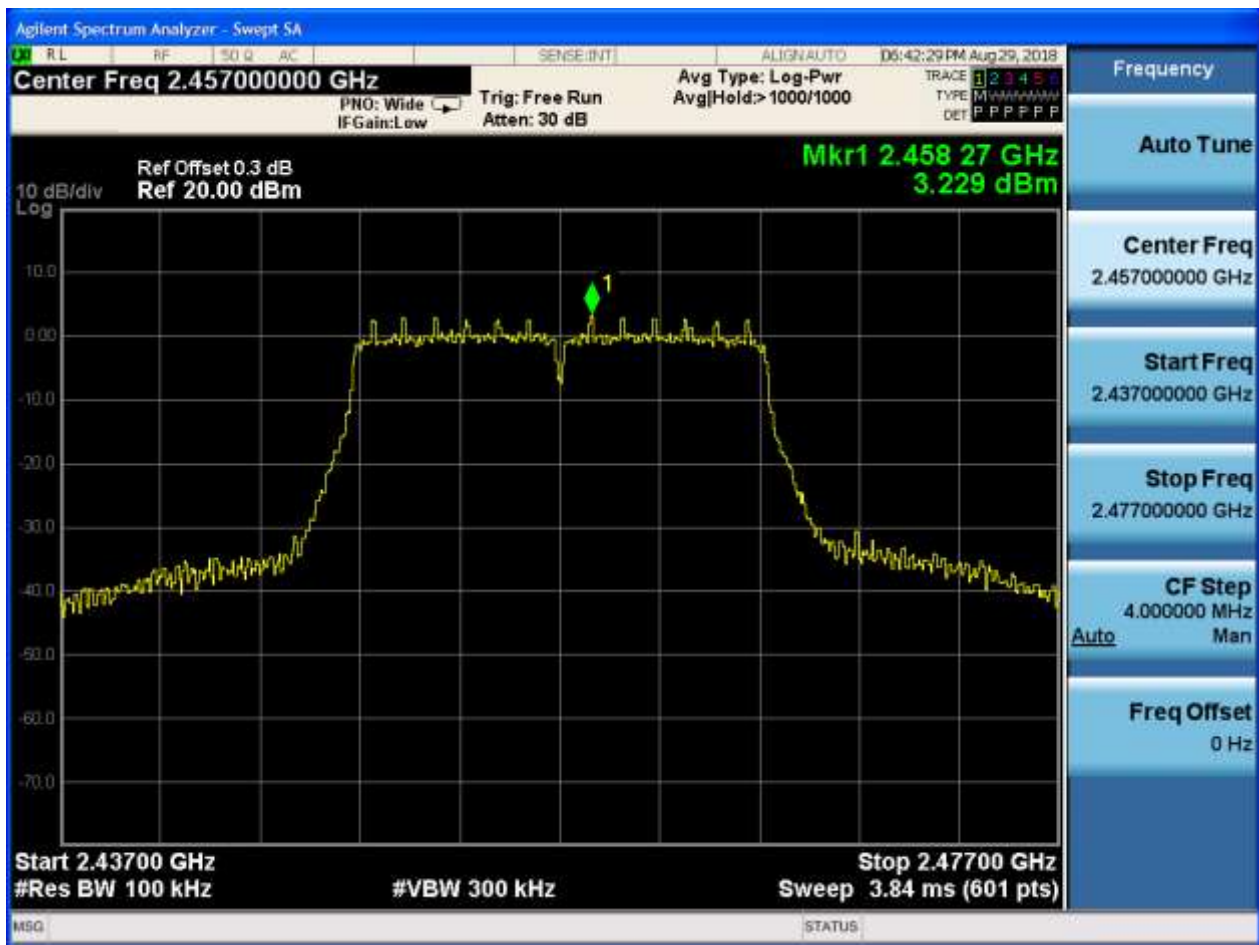






Puw:

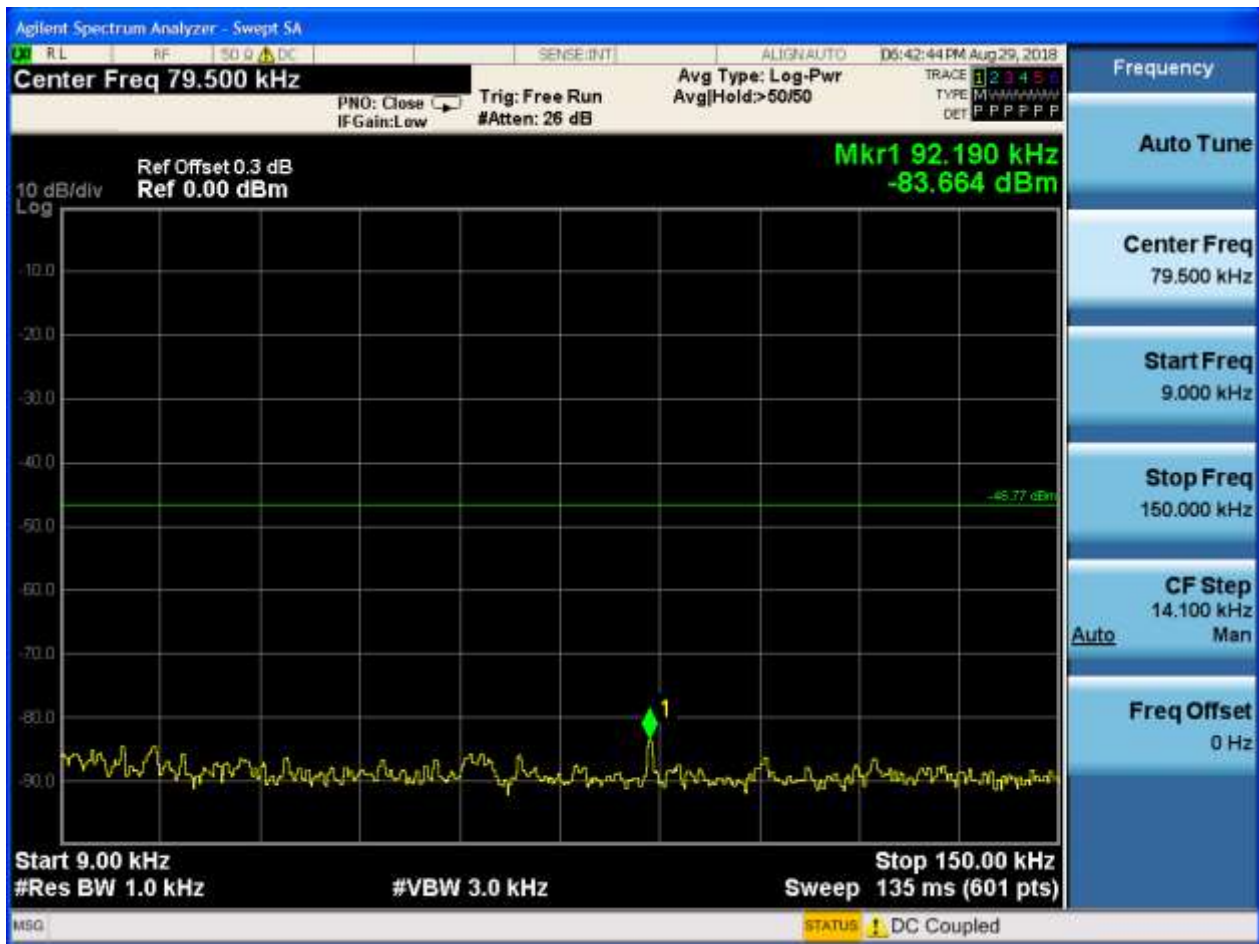

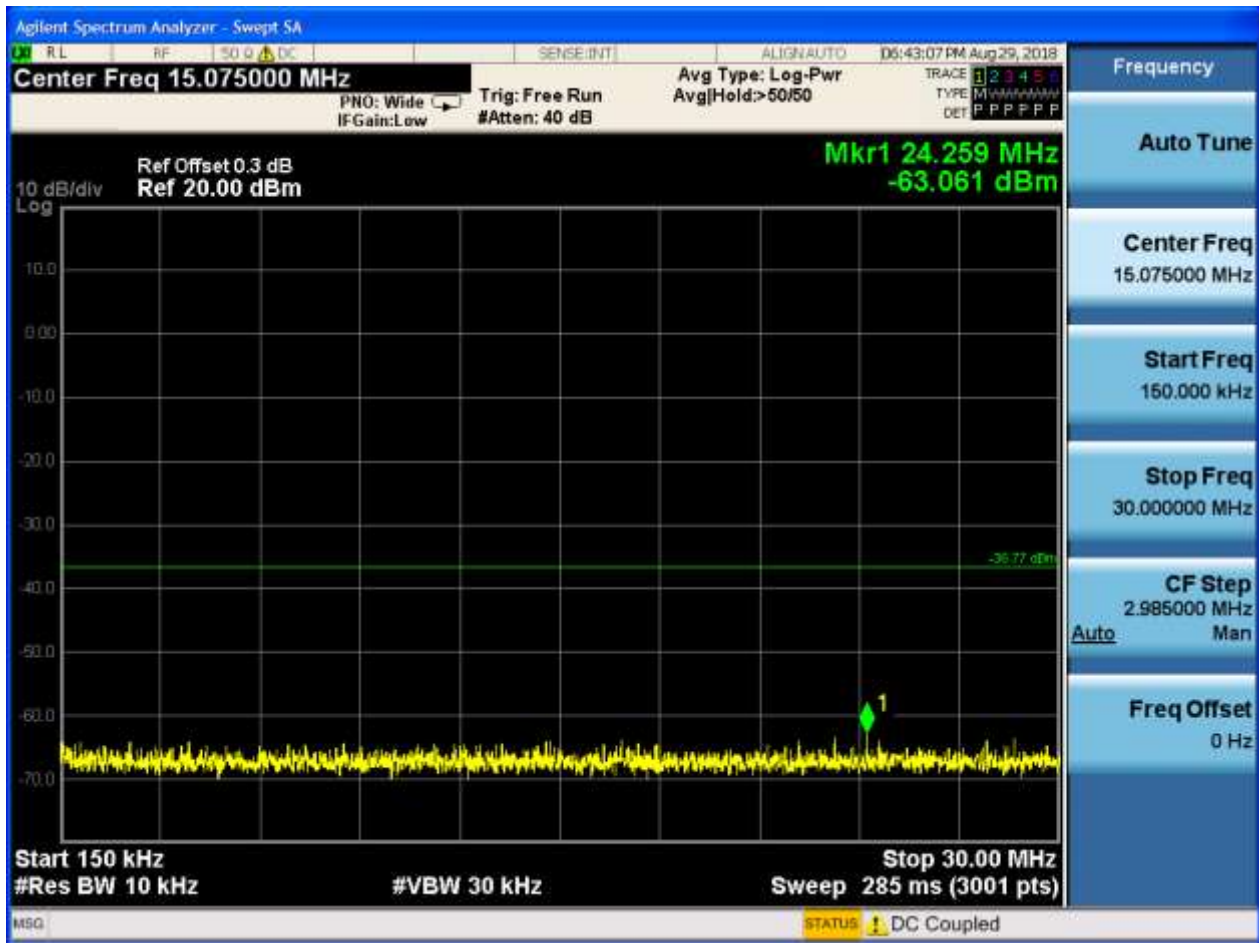

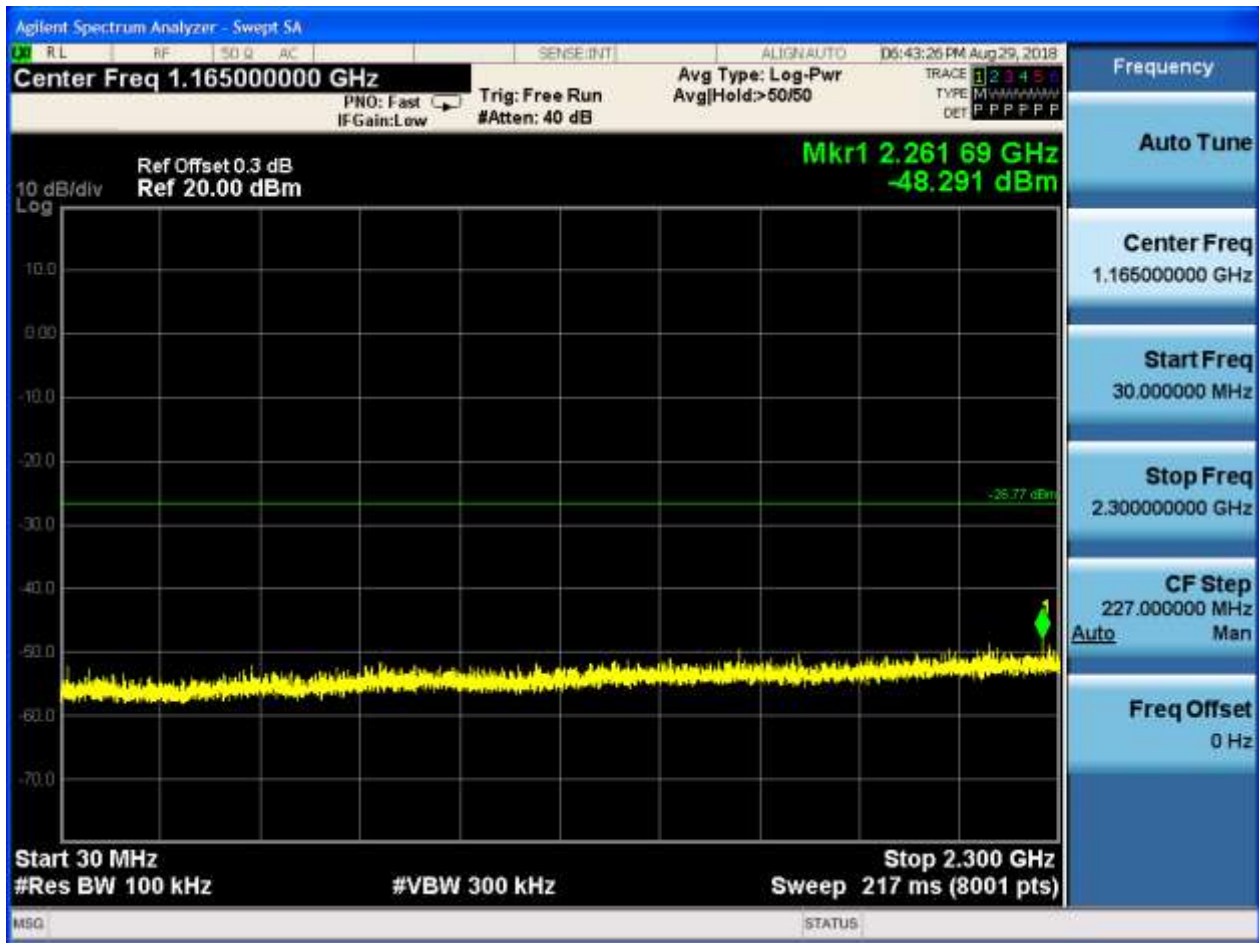

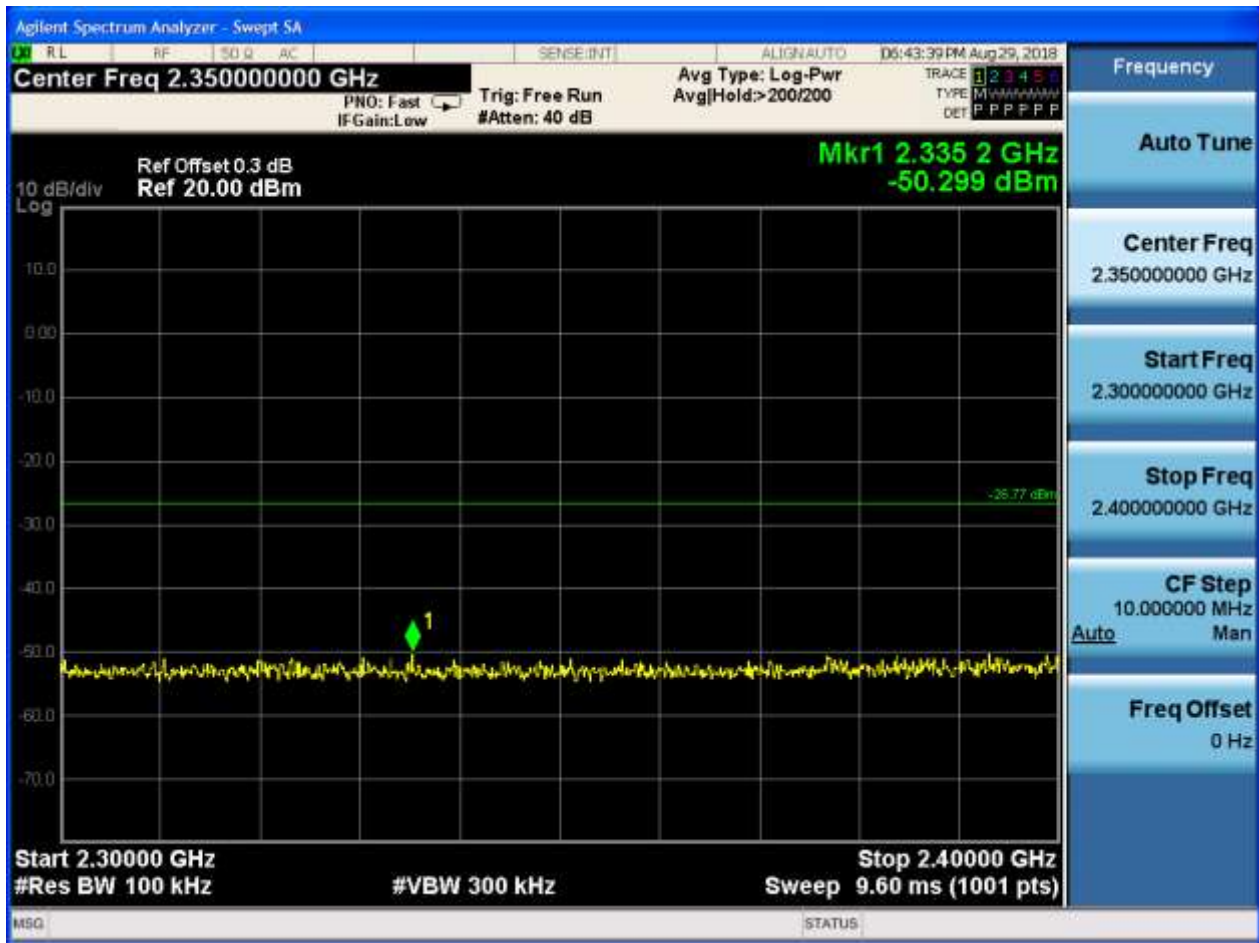

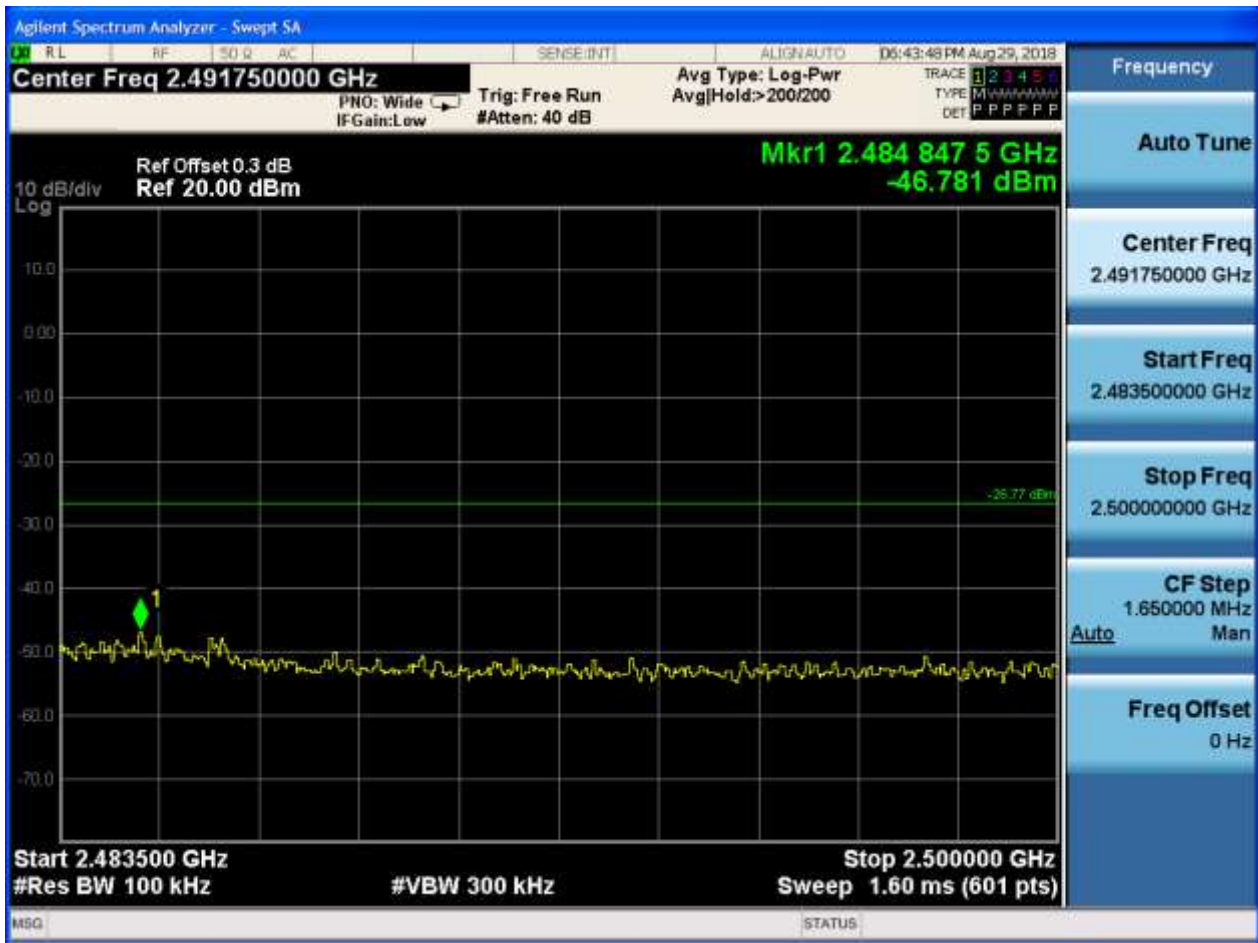






2.8 11G_H_2462@Ant 1


Pref:

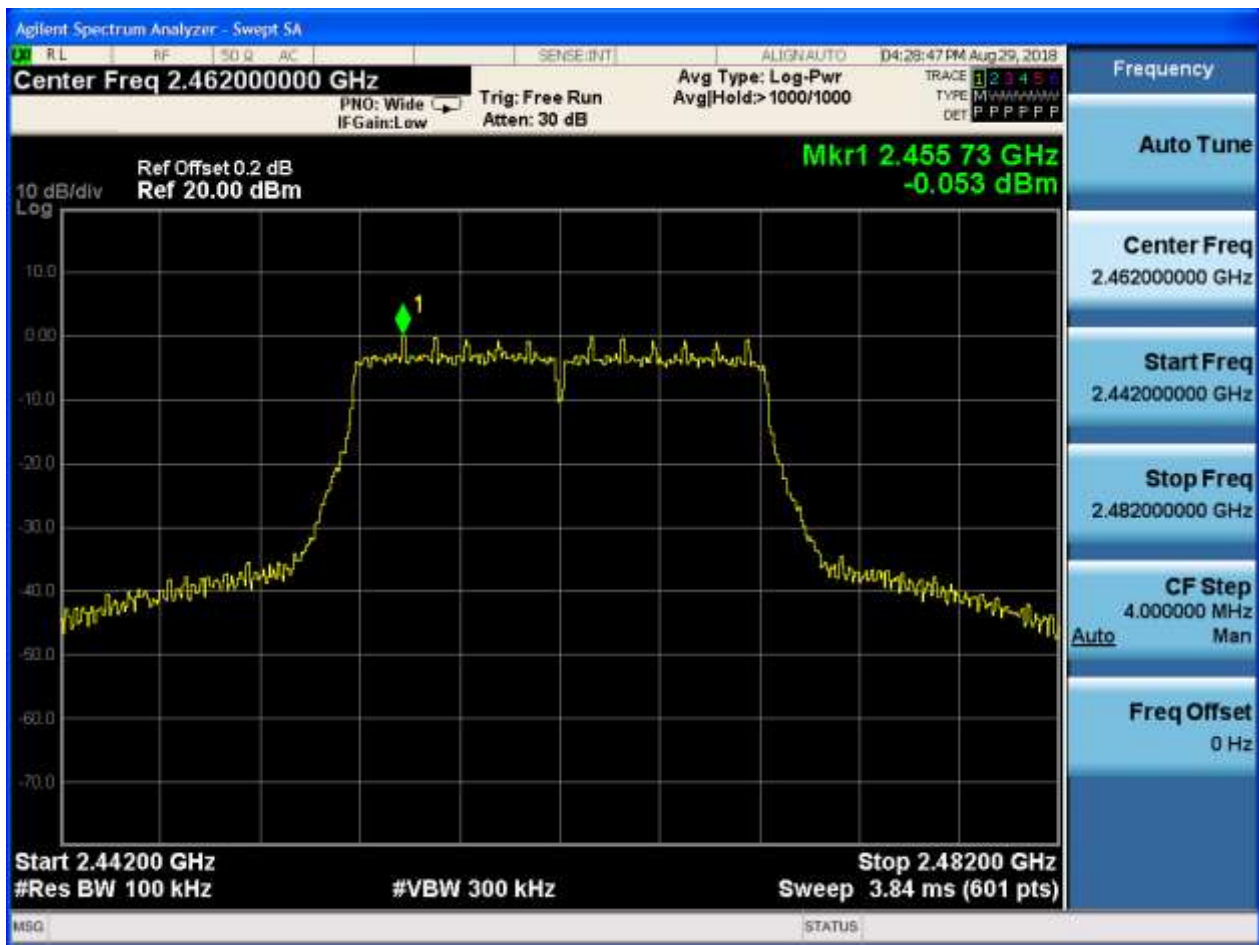




Puw:



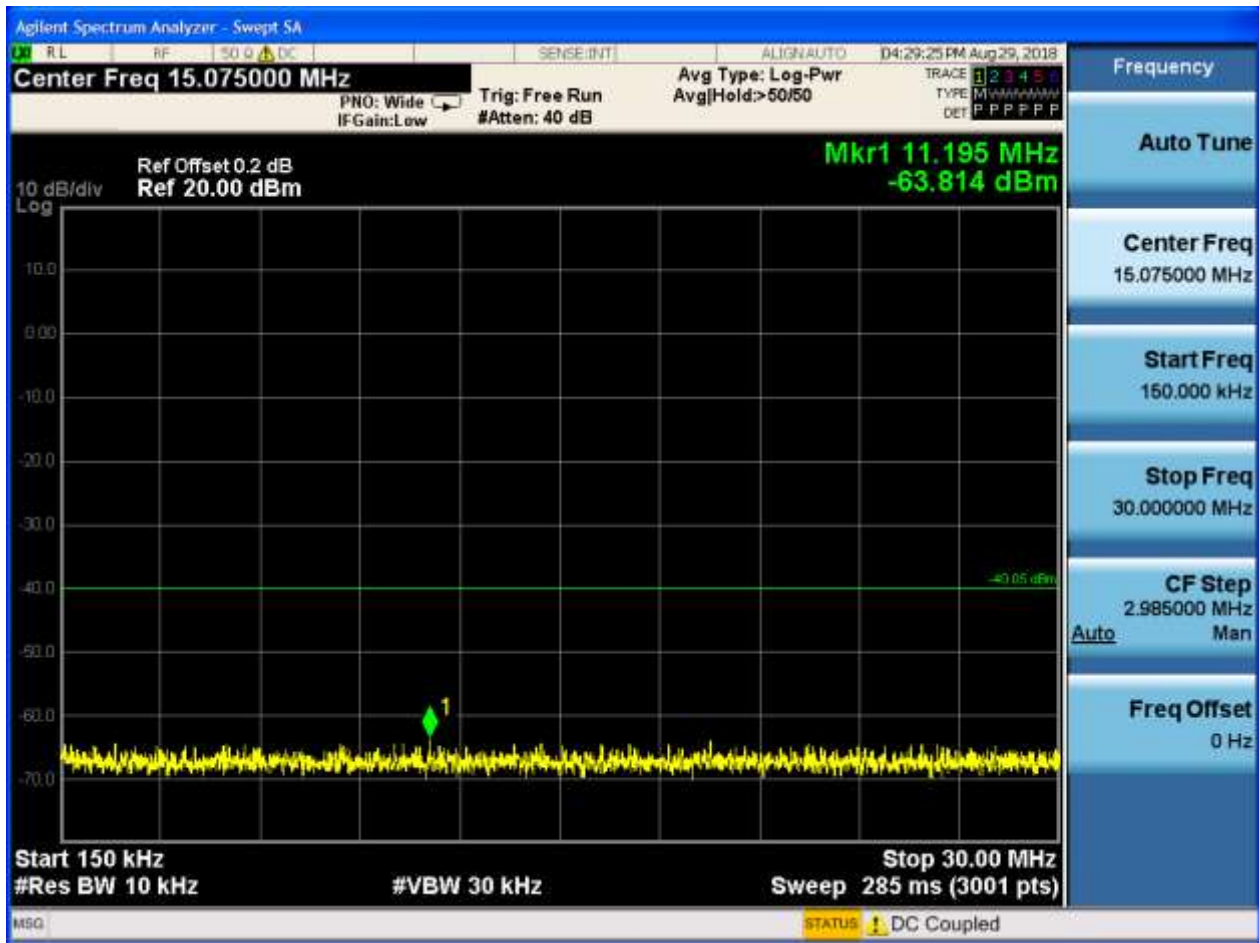

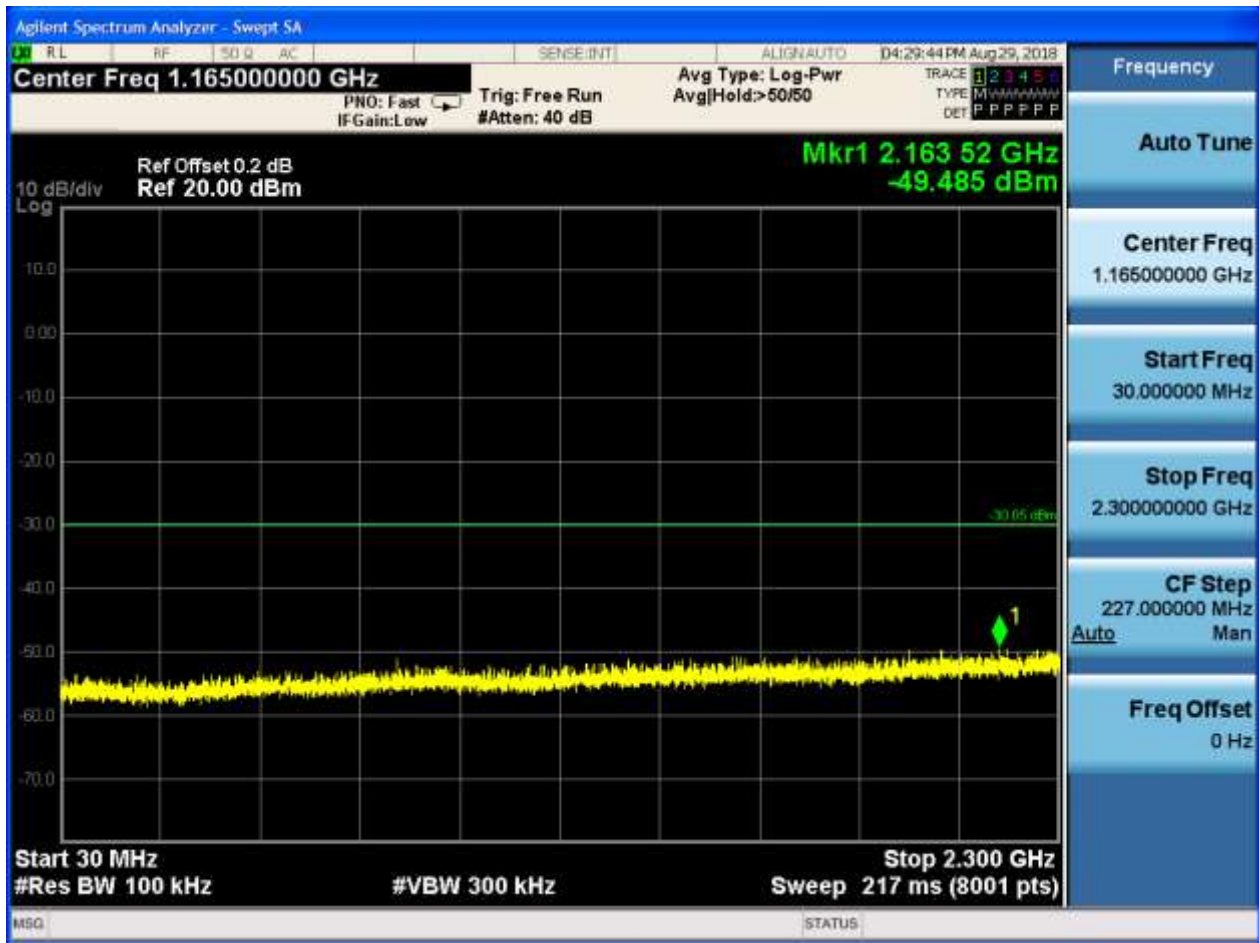










2.9 11N20_L_2412@Ant 1


Pref:

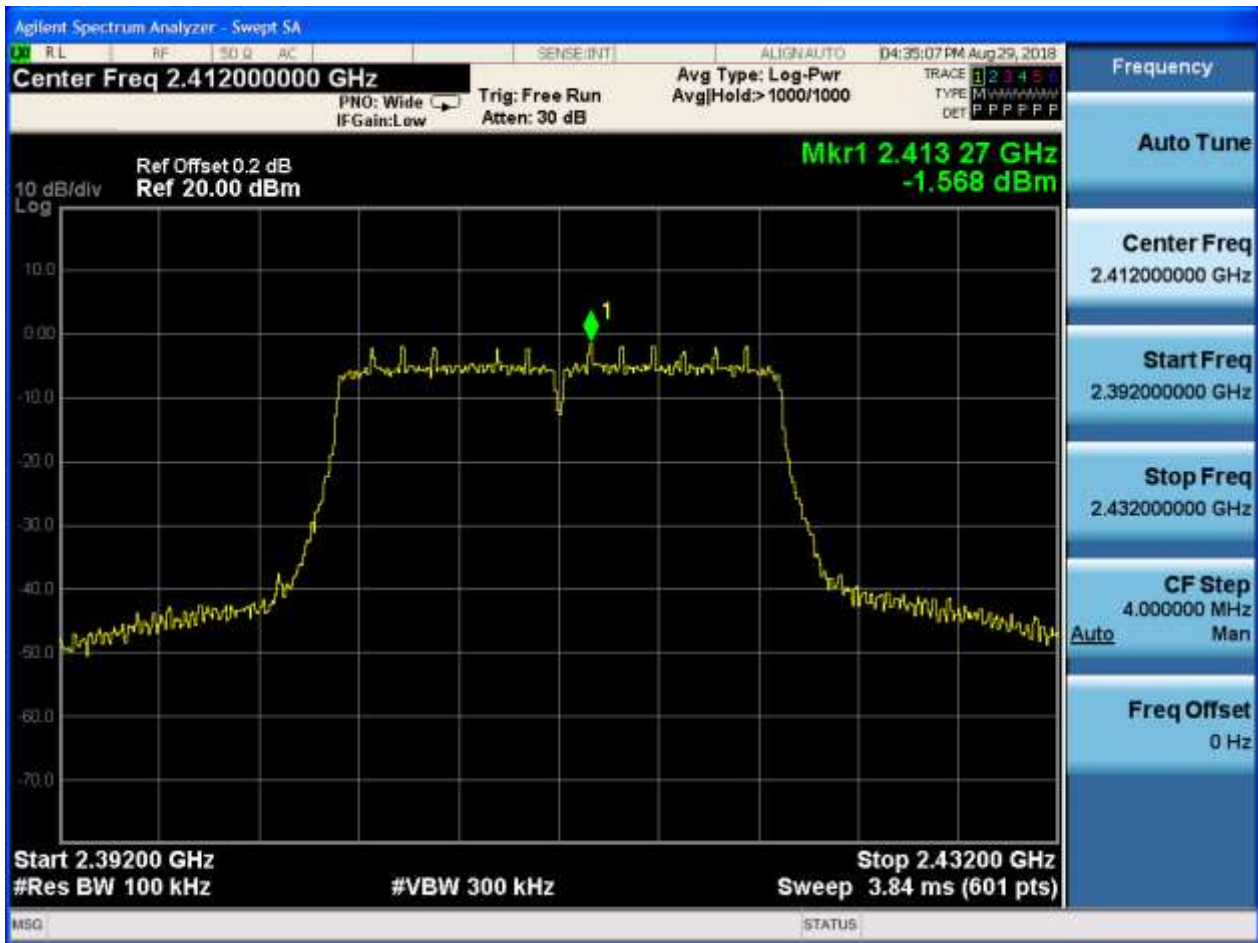




Puw:



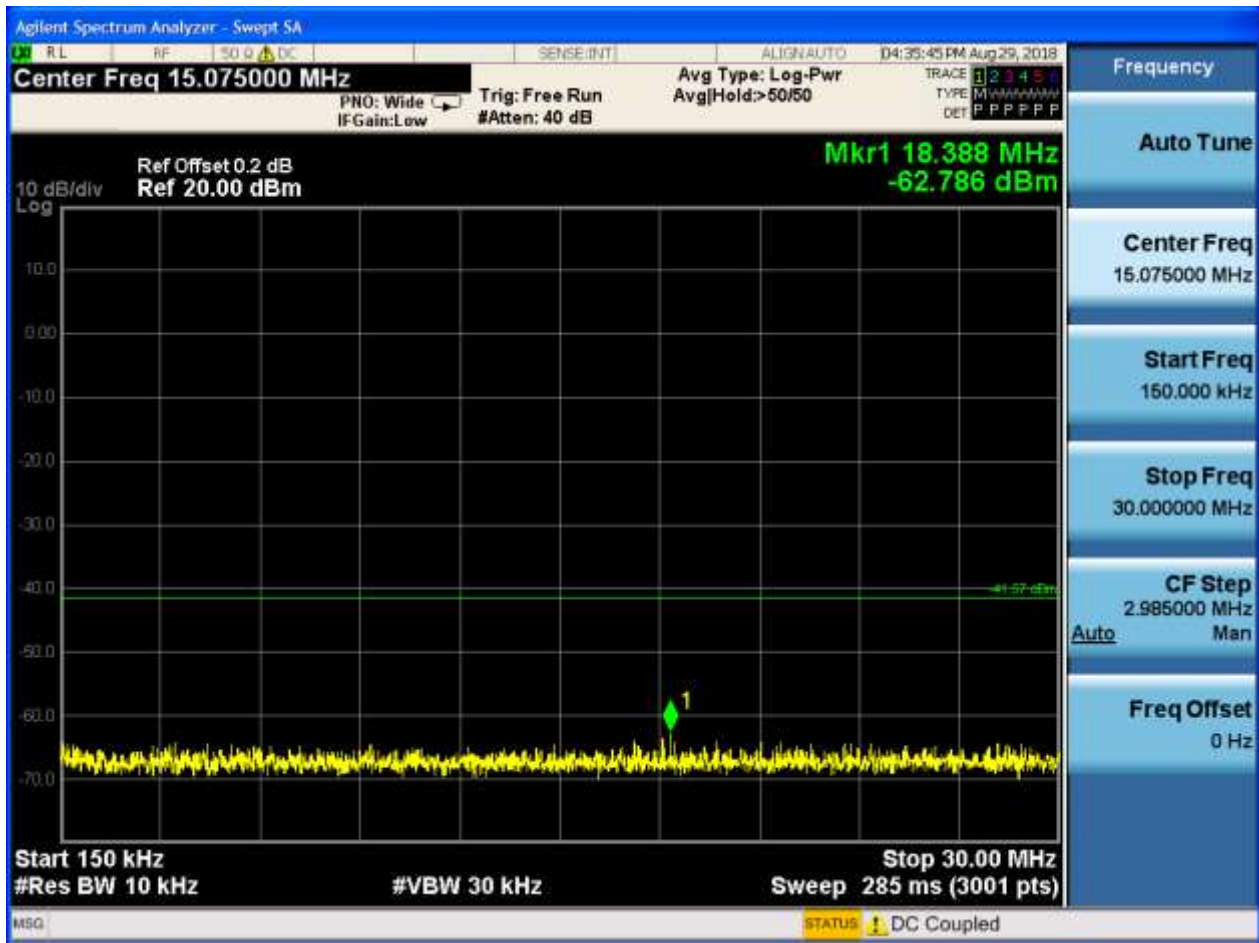





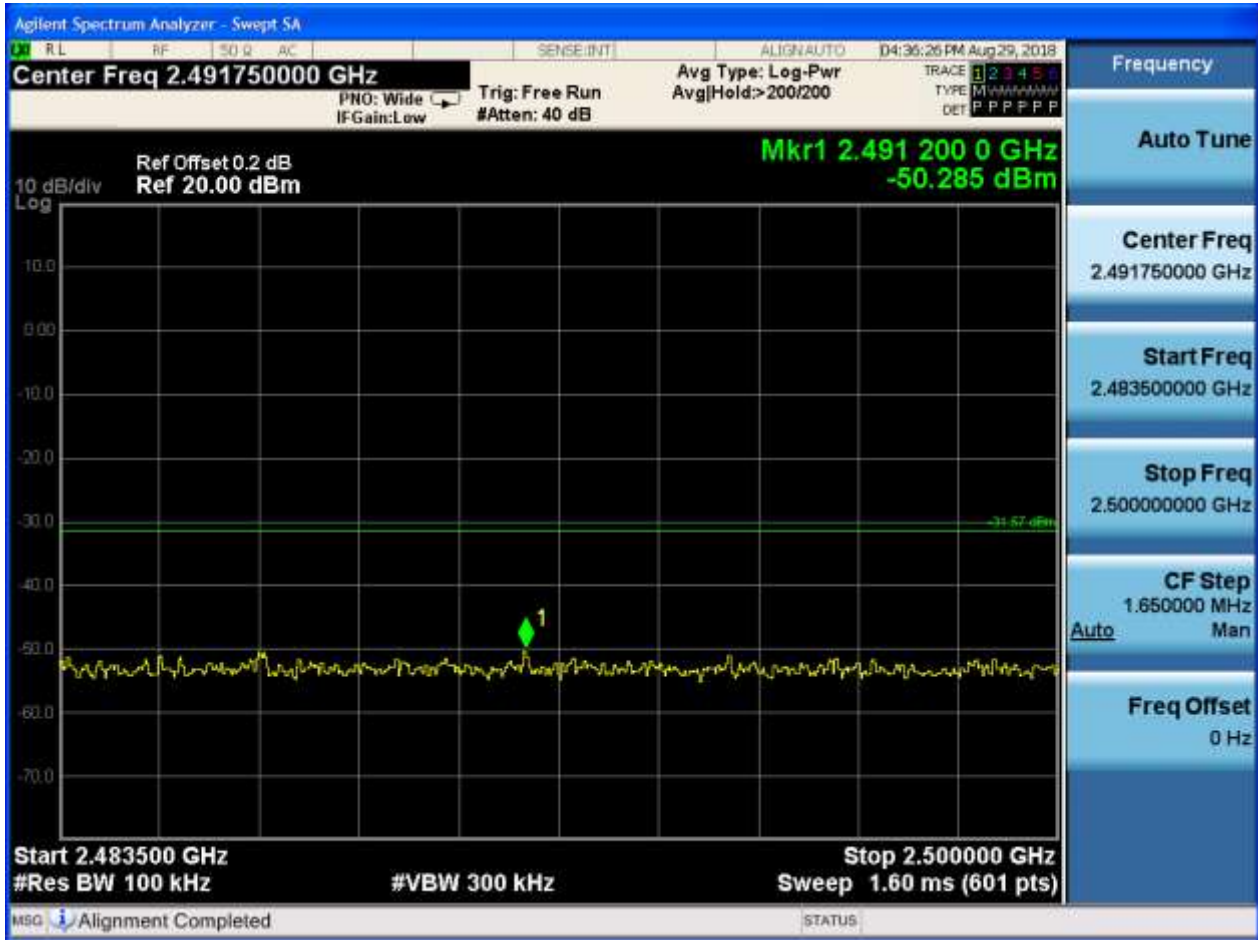







2.10 11N20_L_2417@Ant 1


Pref:

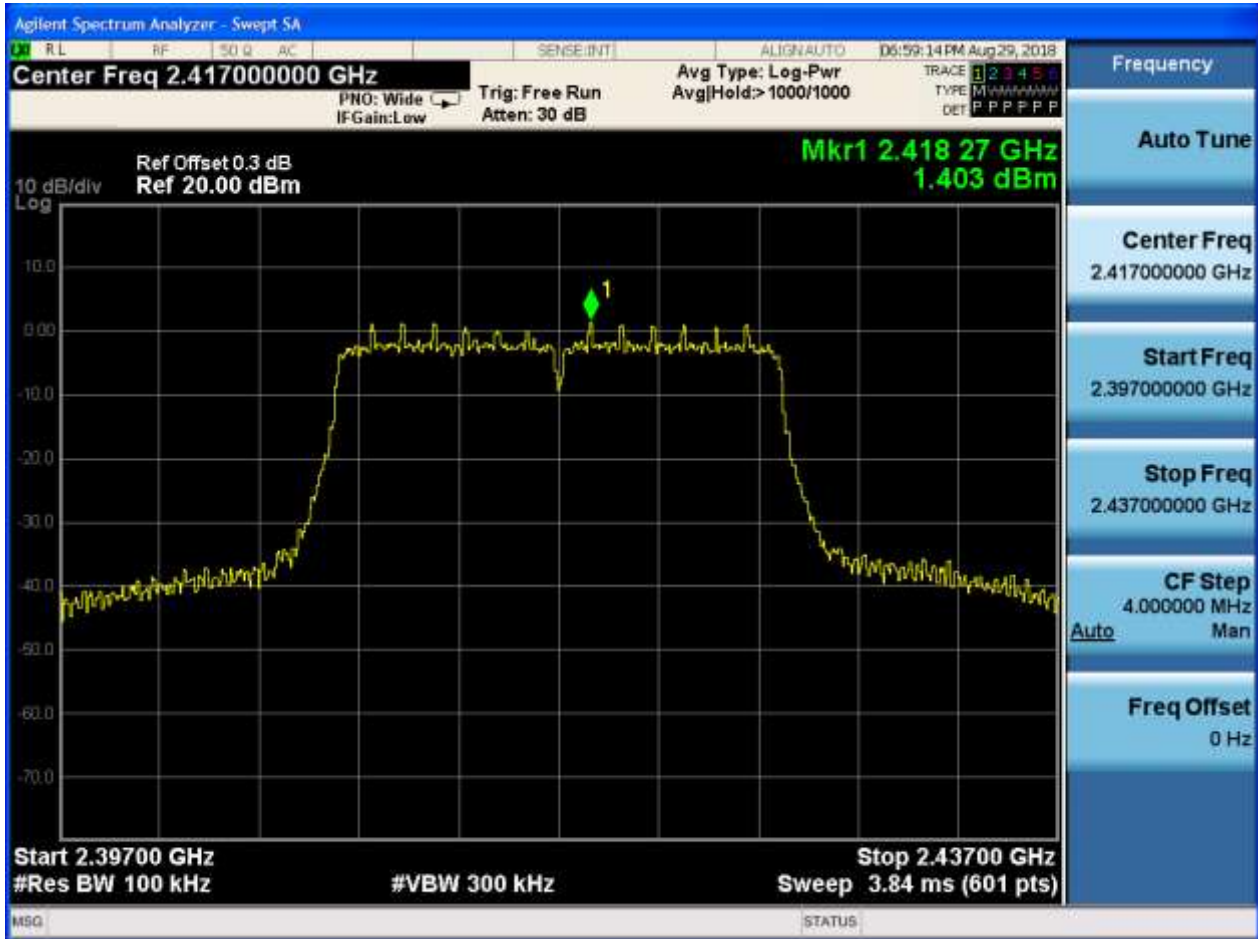




Puw:

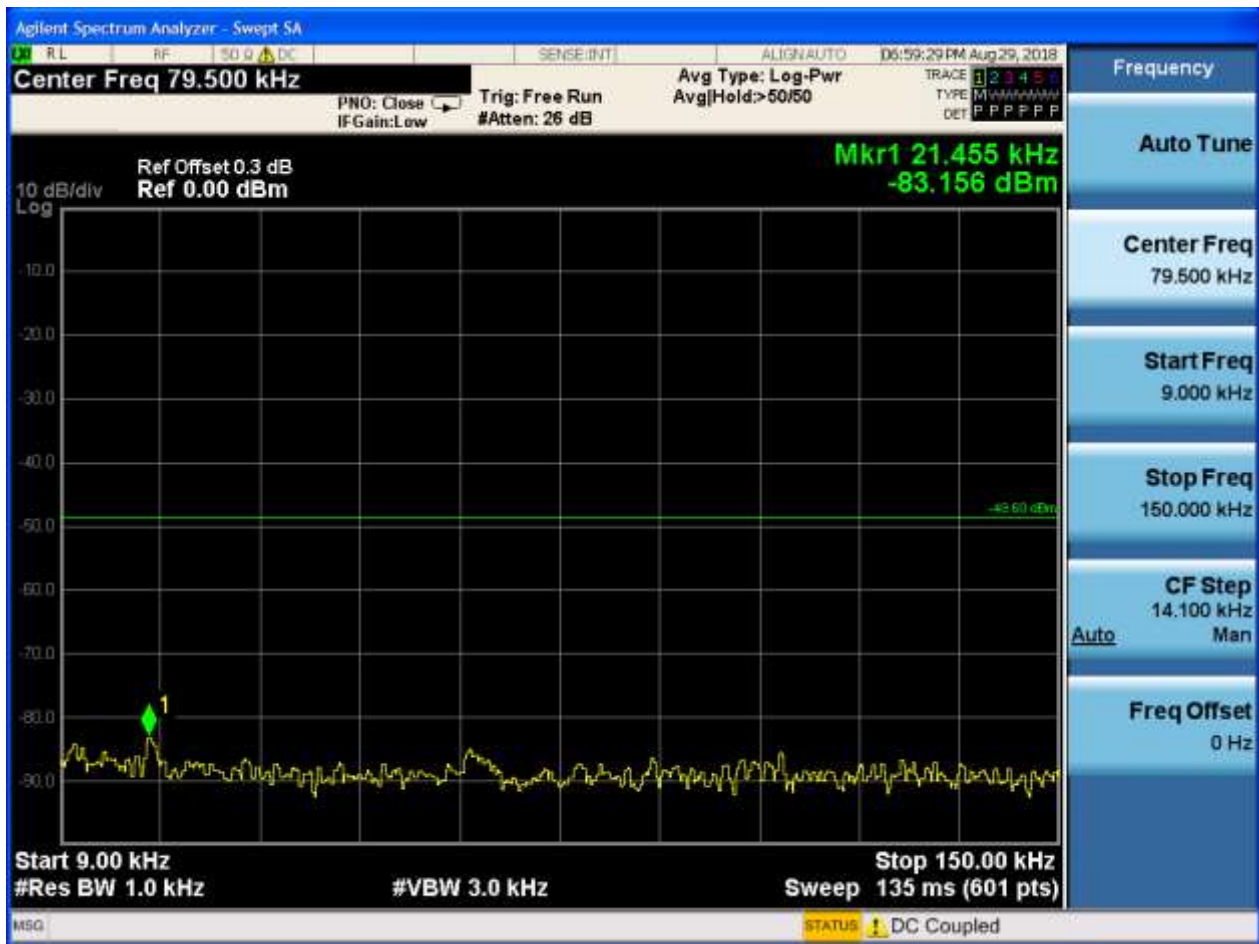

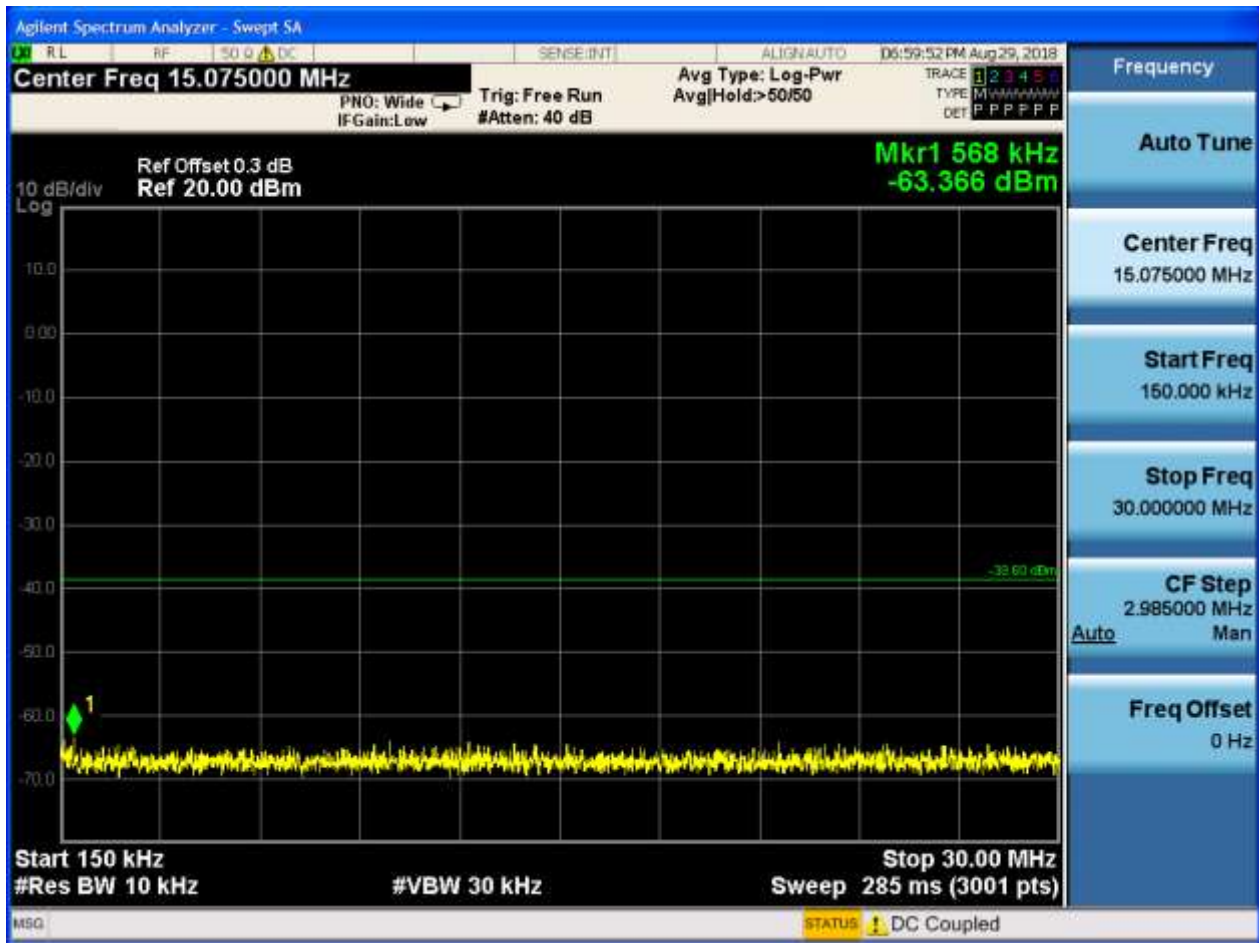

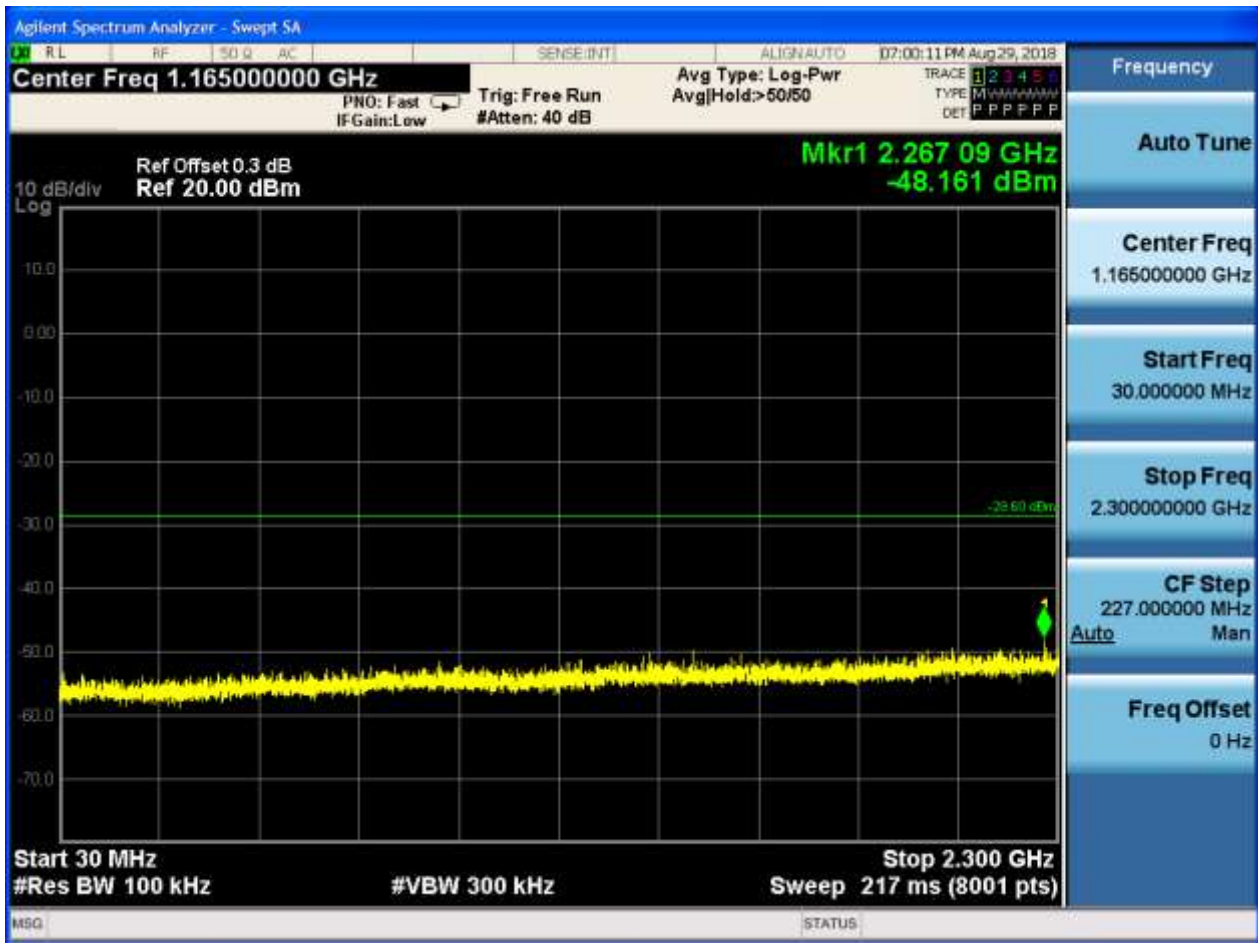










2.11 11N20_M_2437@Ant 1


Pref:

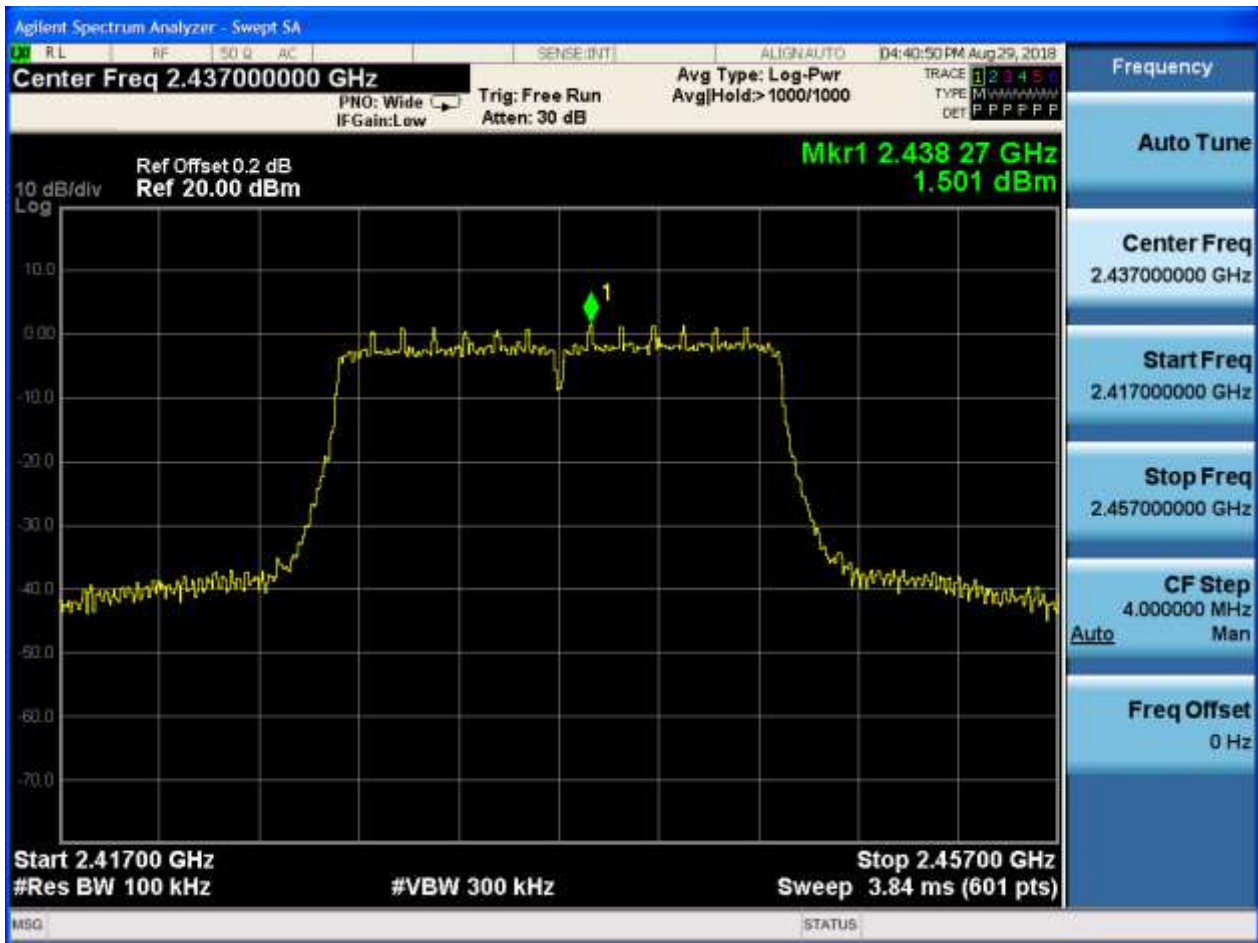






Puw:



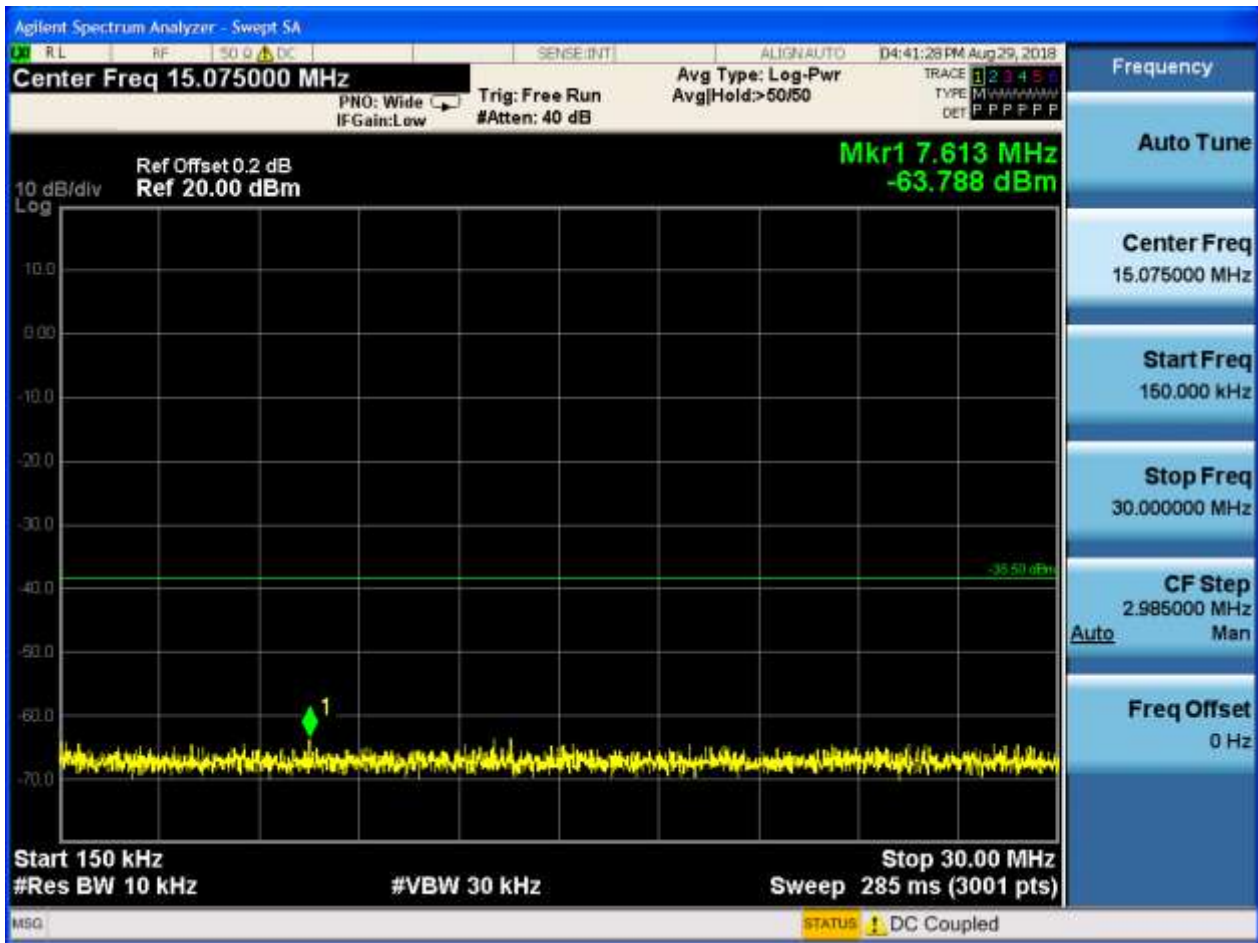

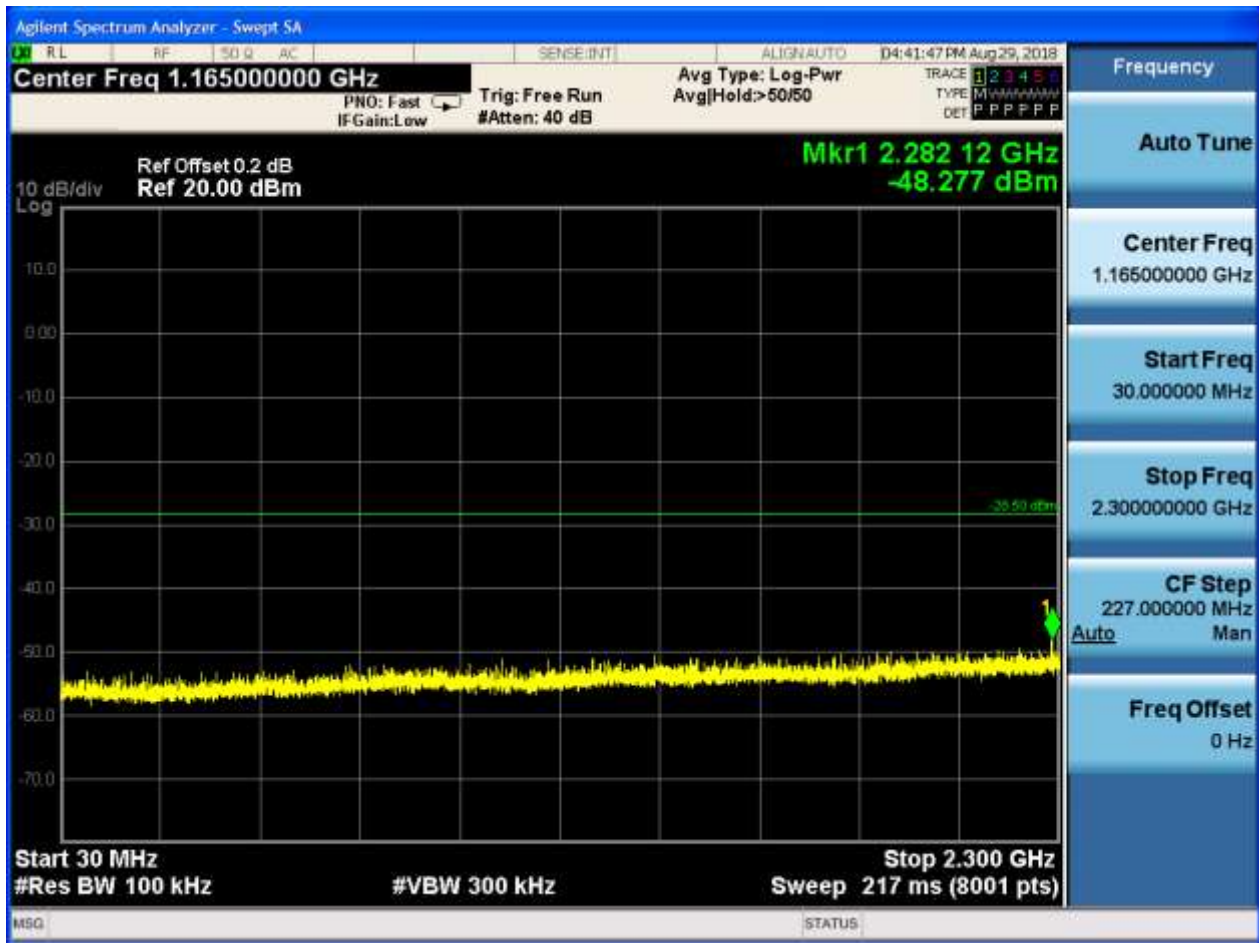

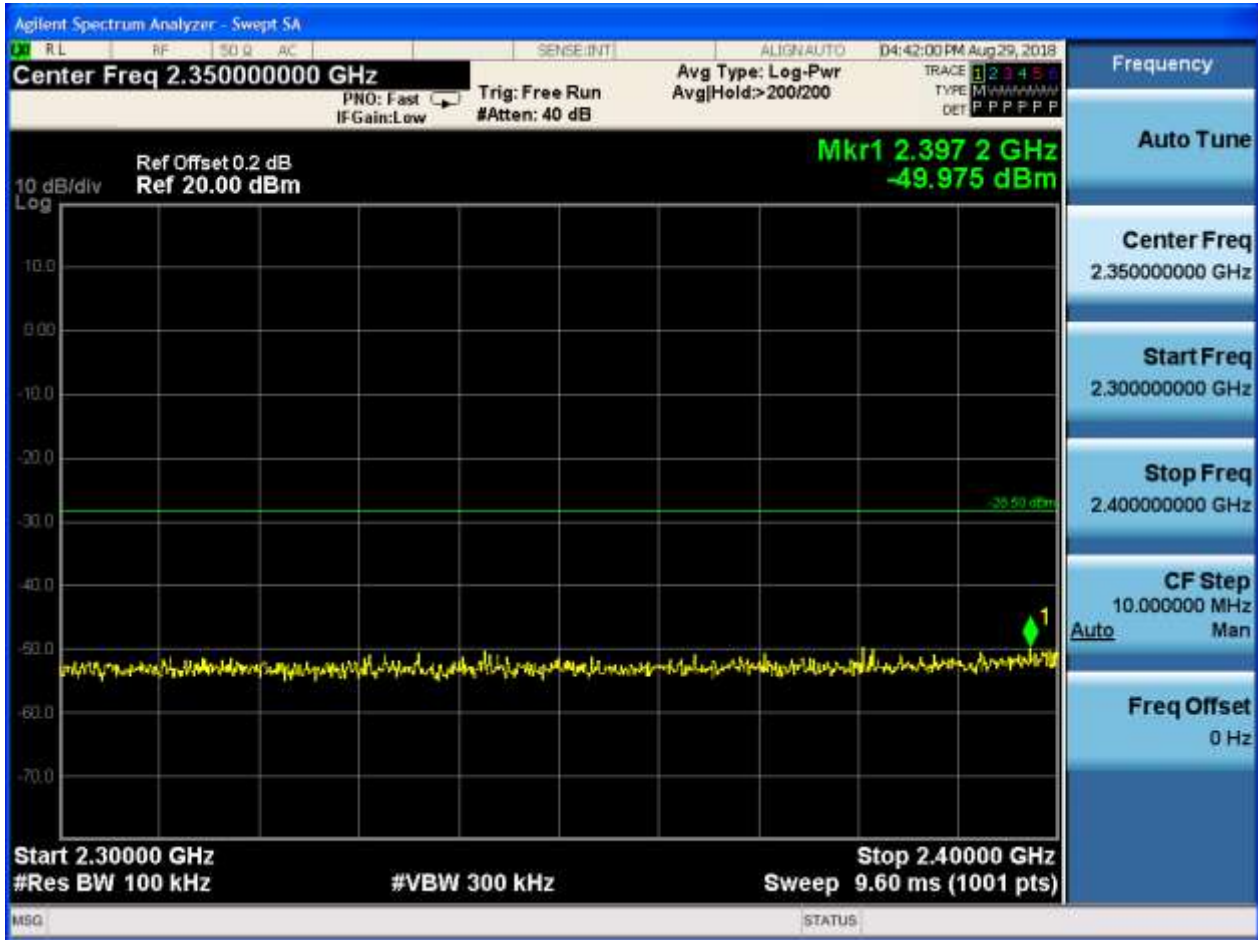

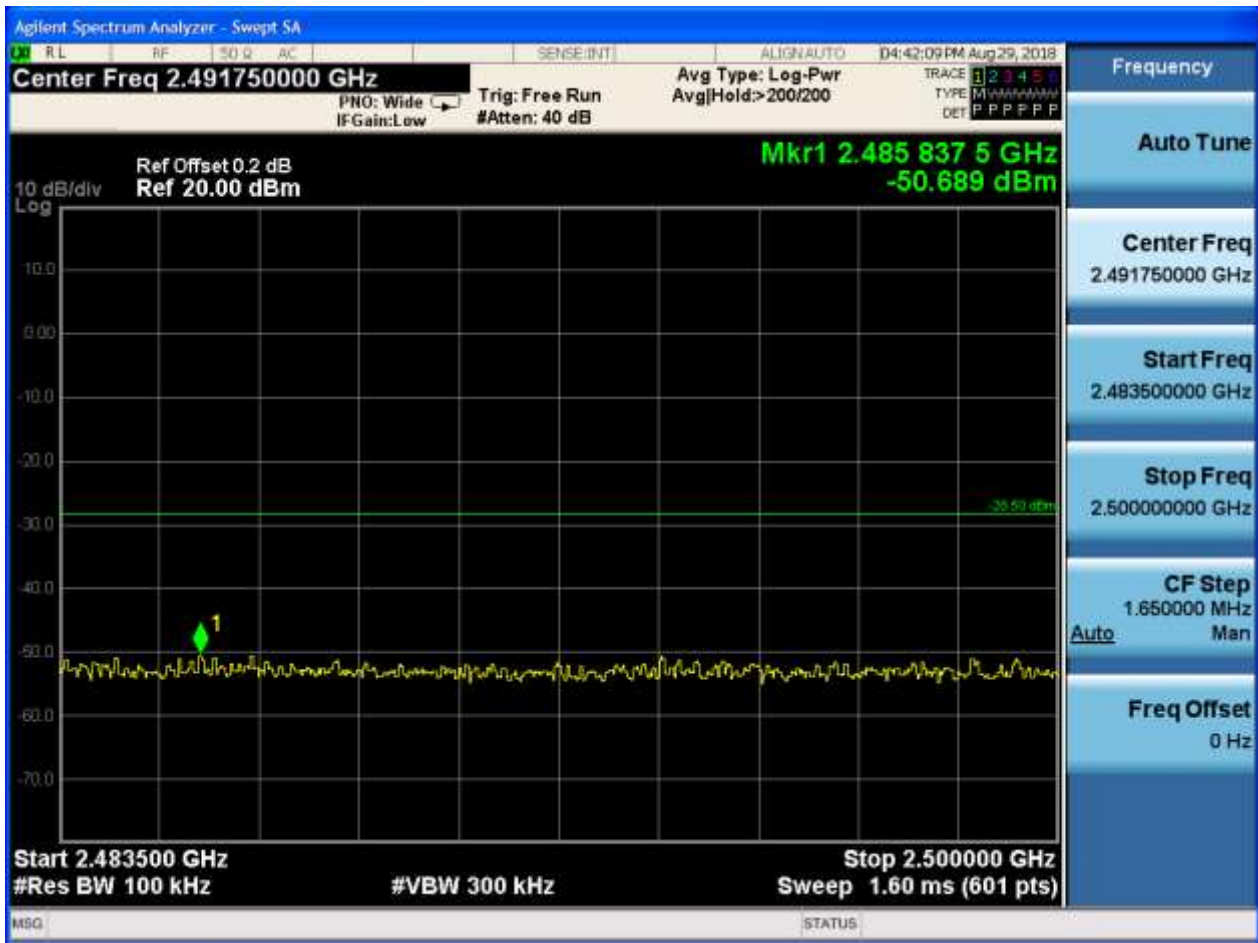








2.12 11N20_H_2457@Ant 1

Pref:

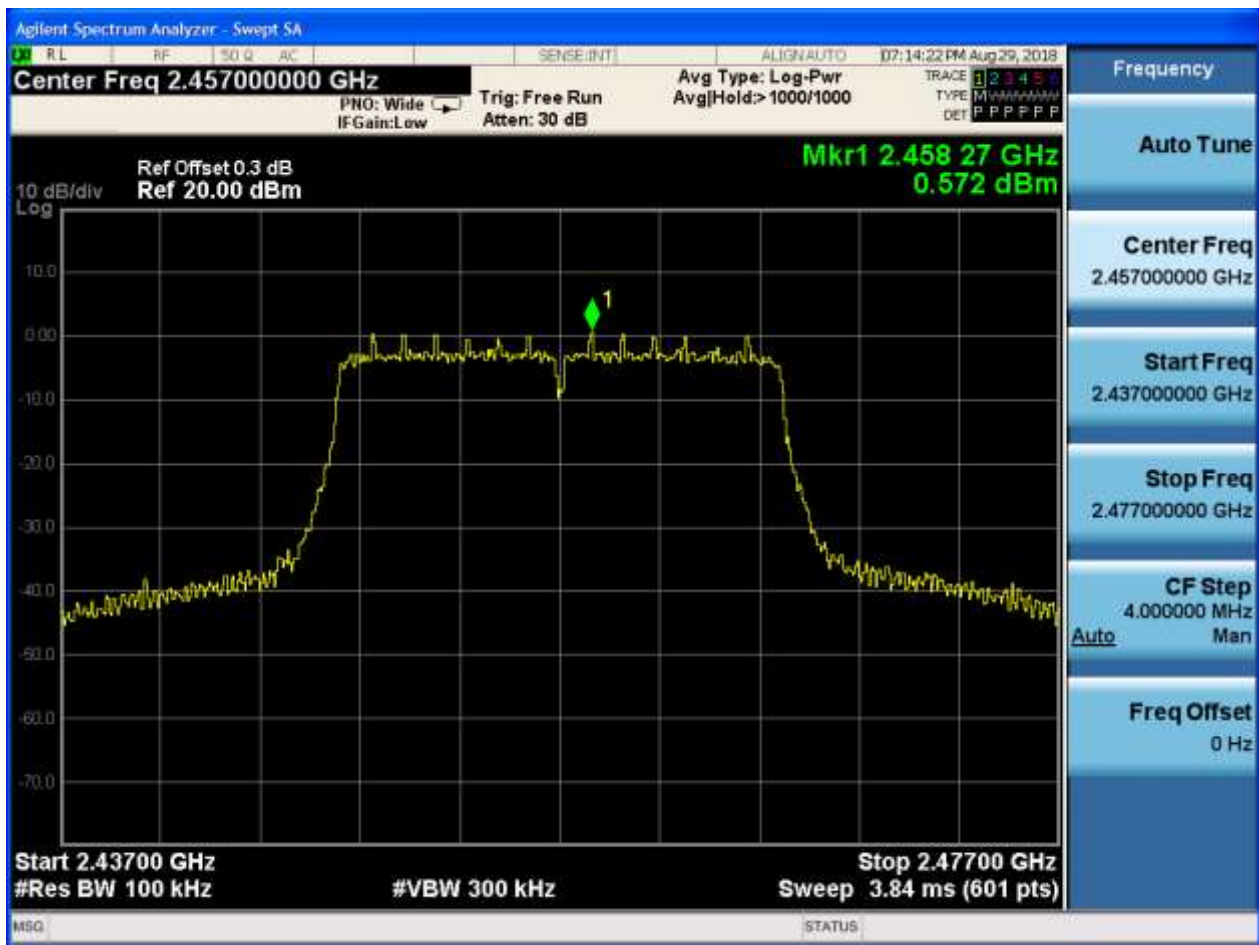

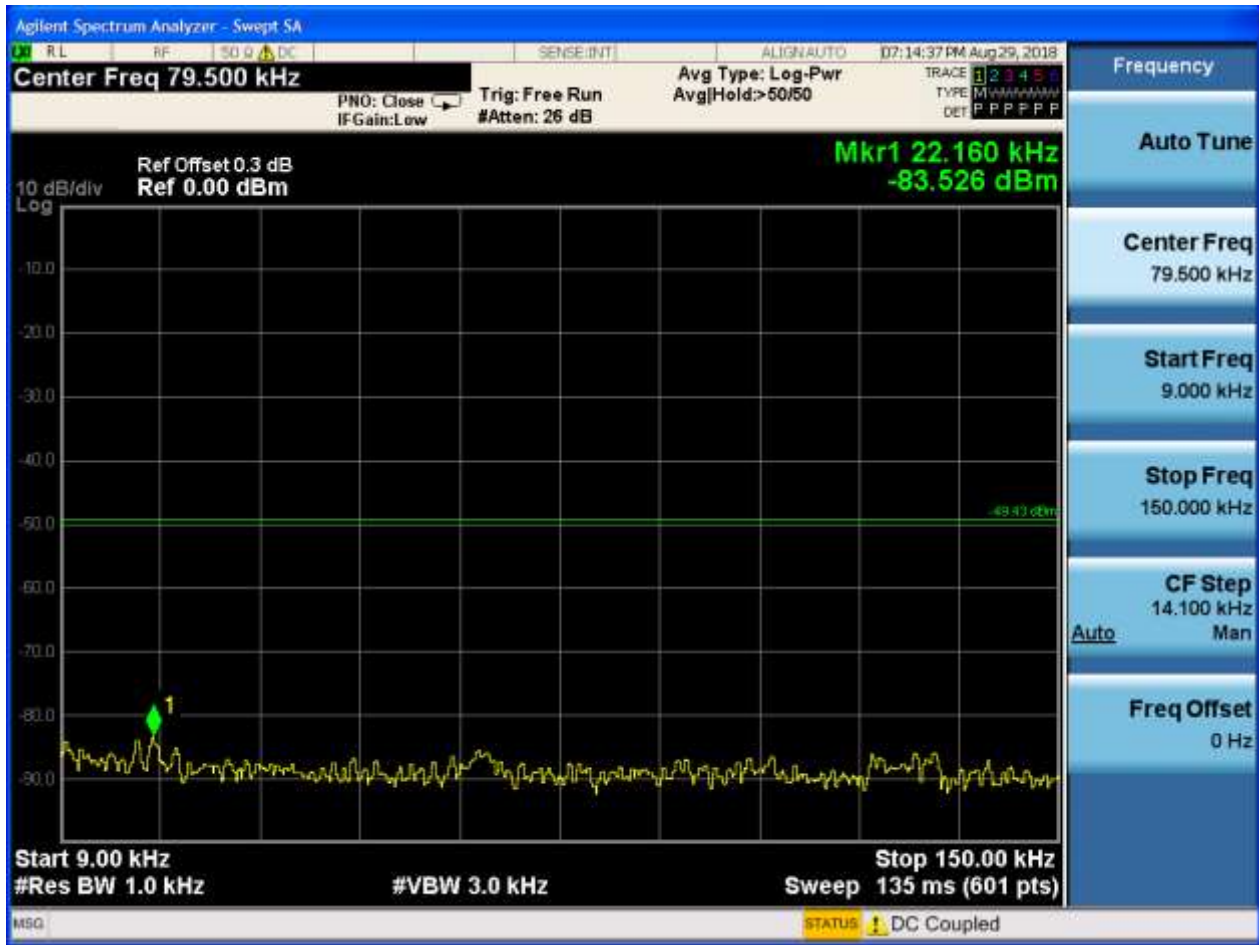P_uw:

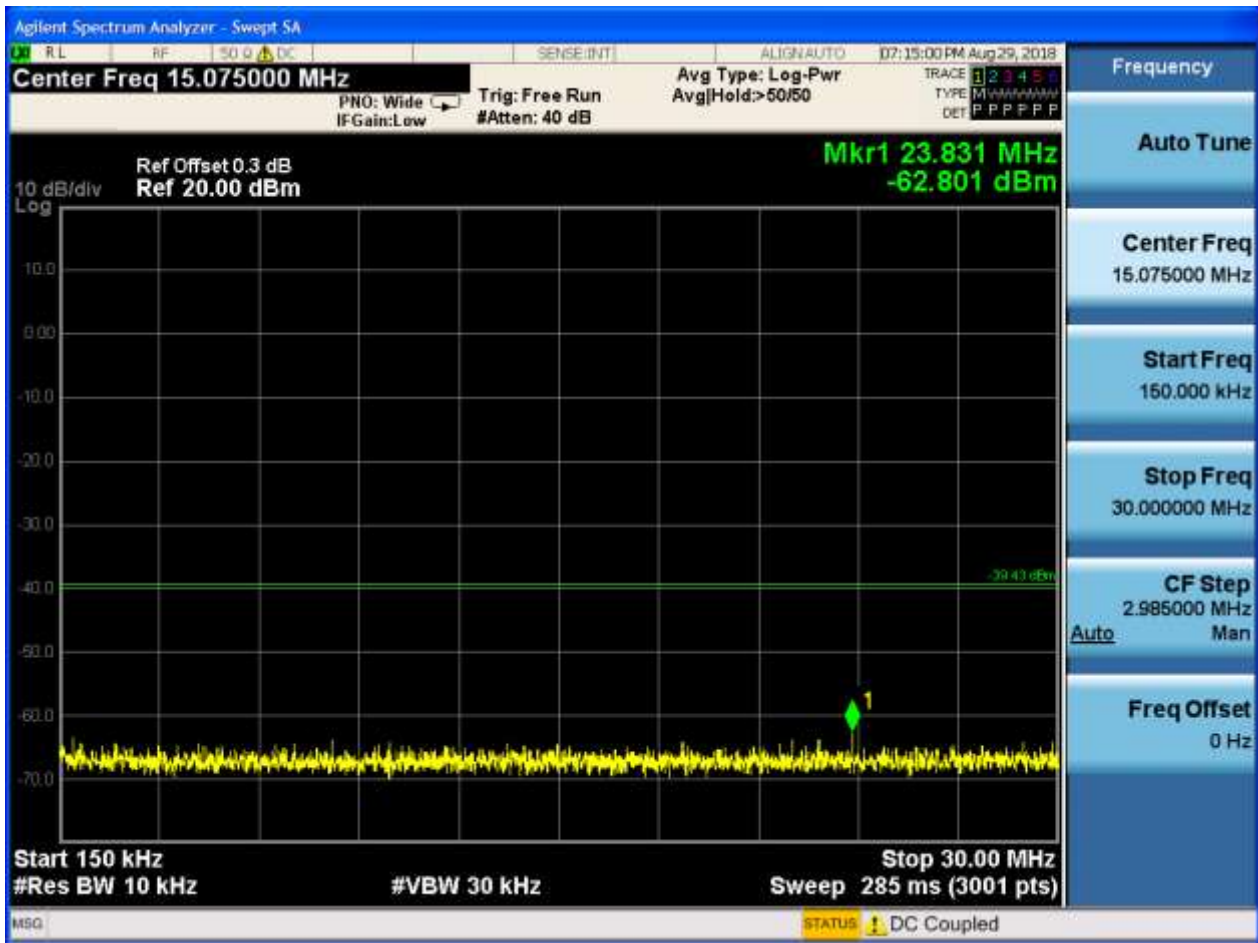











2.13 11N20_H_2462@Ant 1


Pref:







Puw:



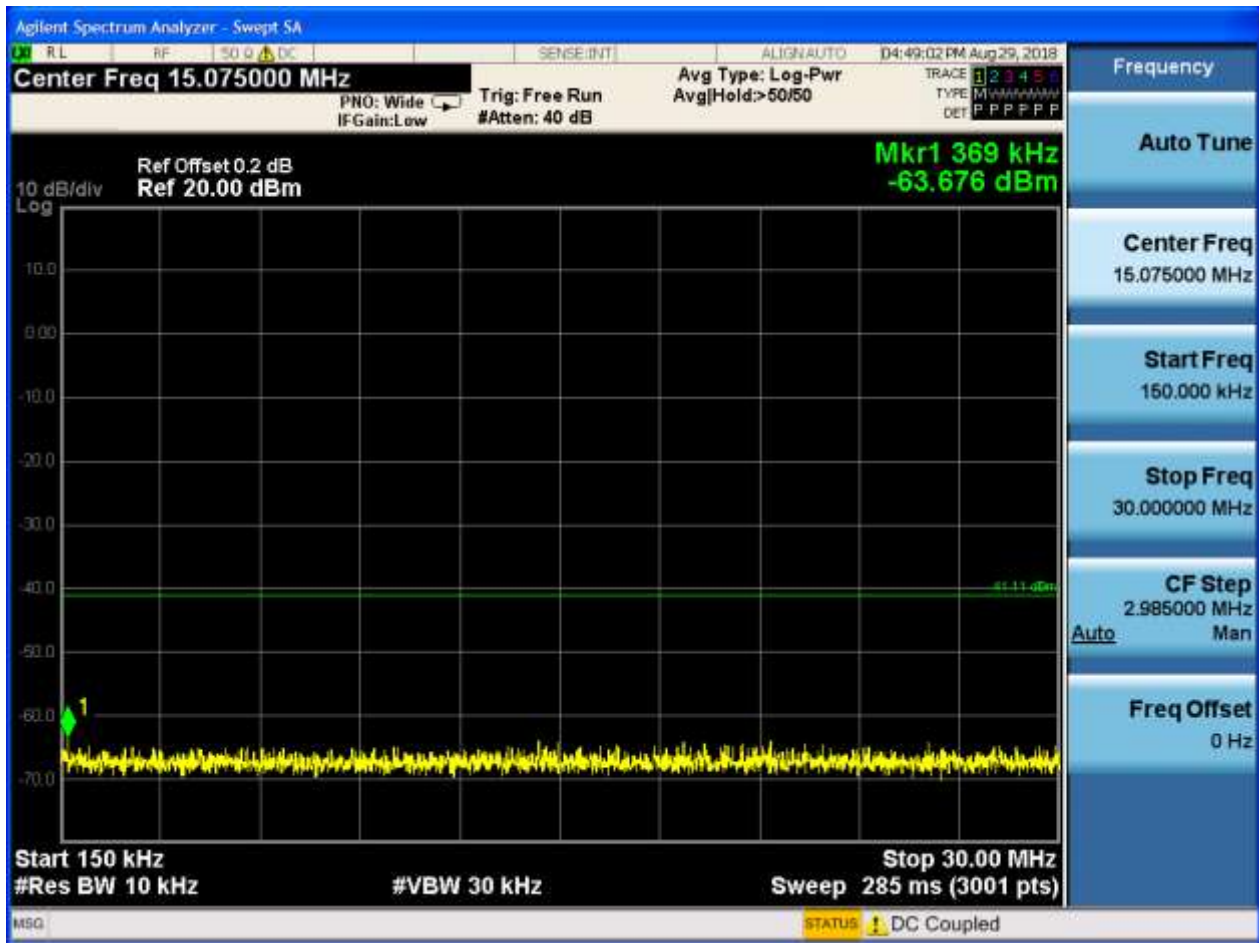



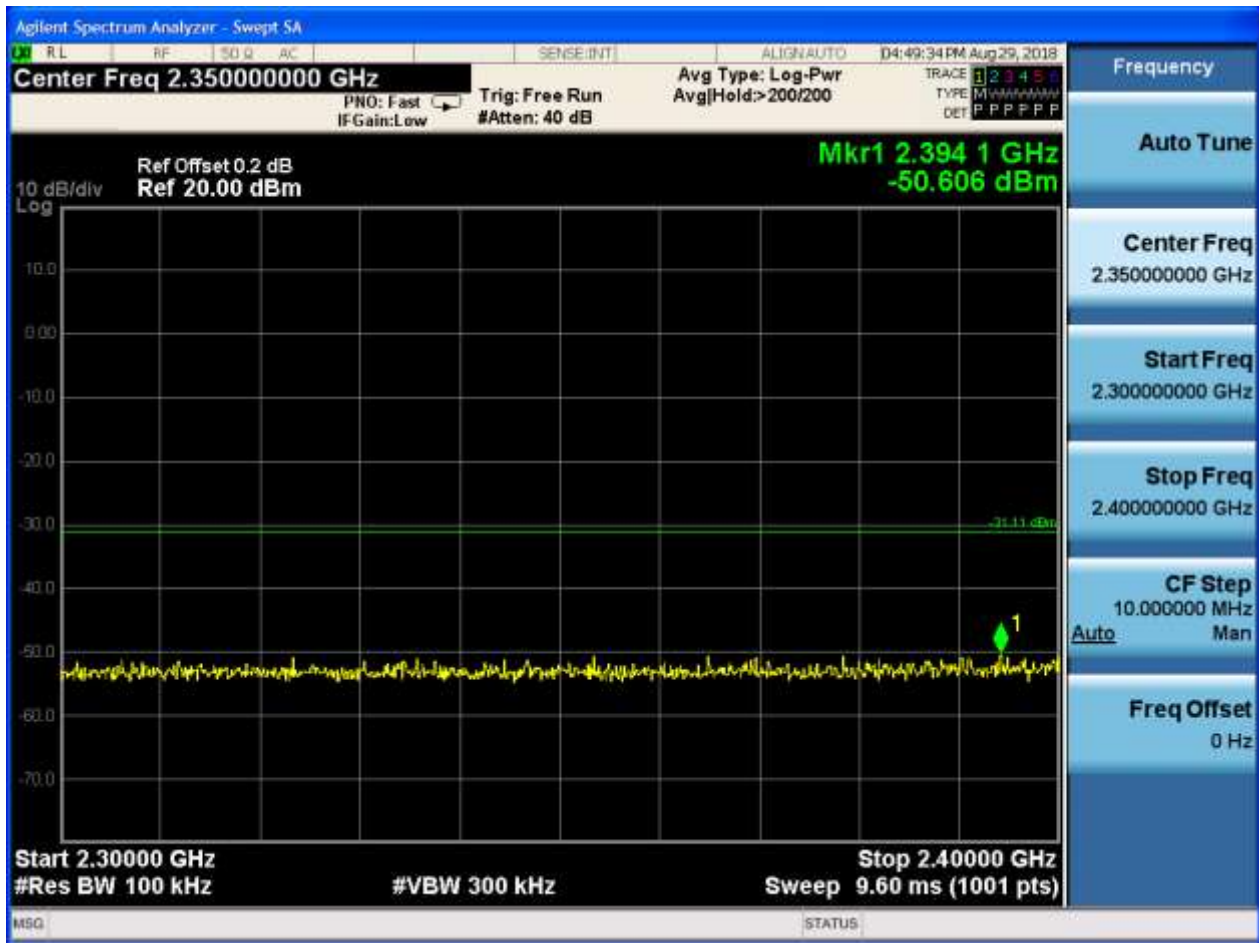

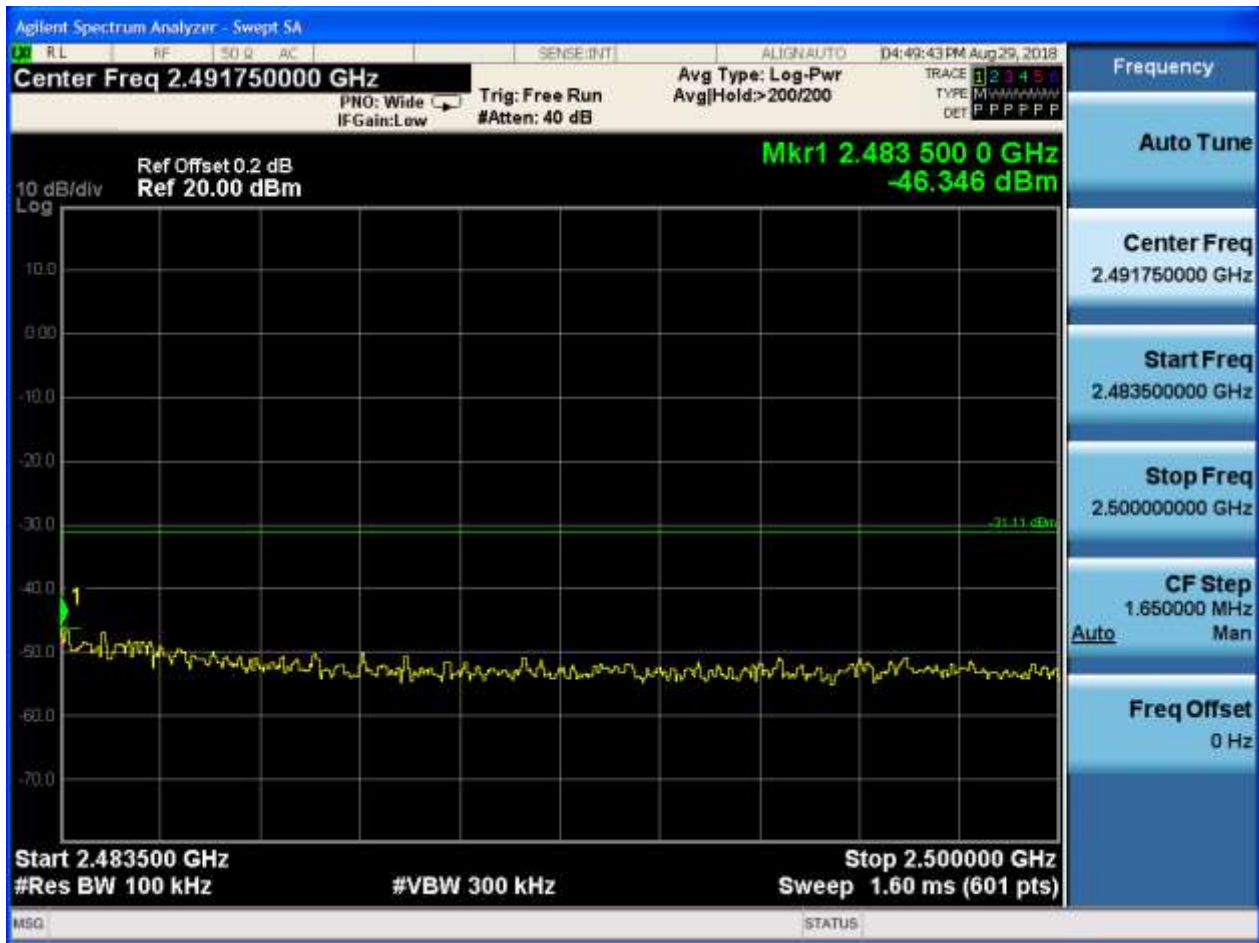







2.14 11N40_L_2422@Ant 1


Pref:

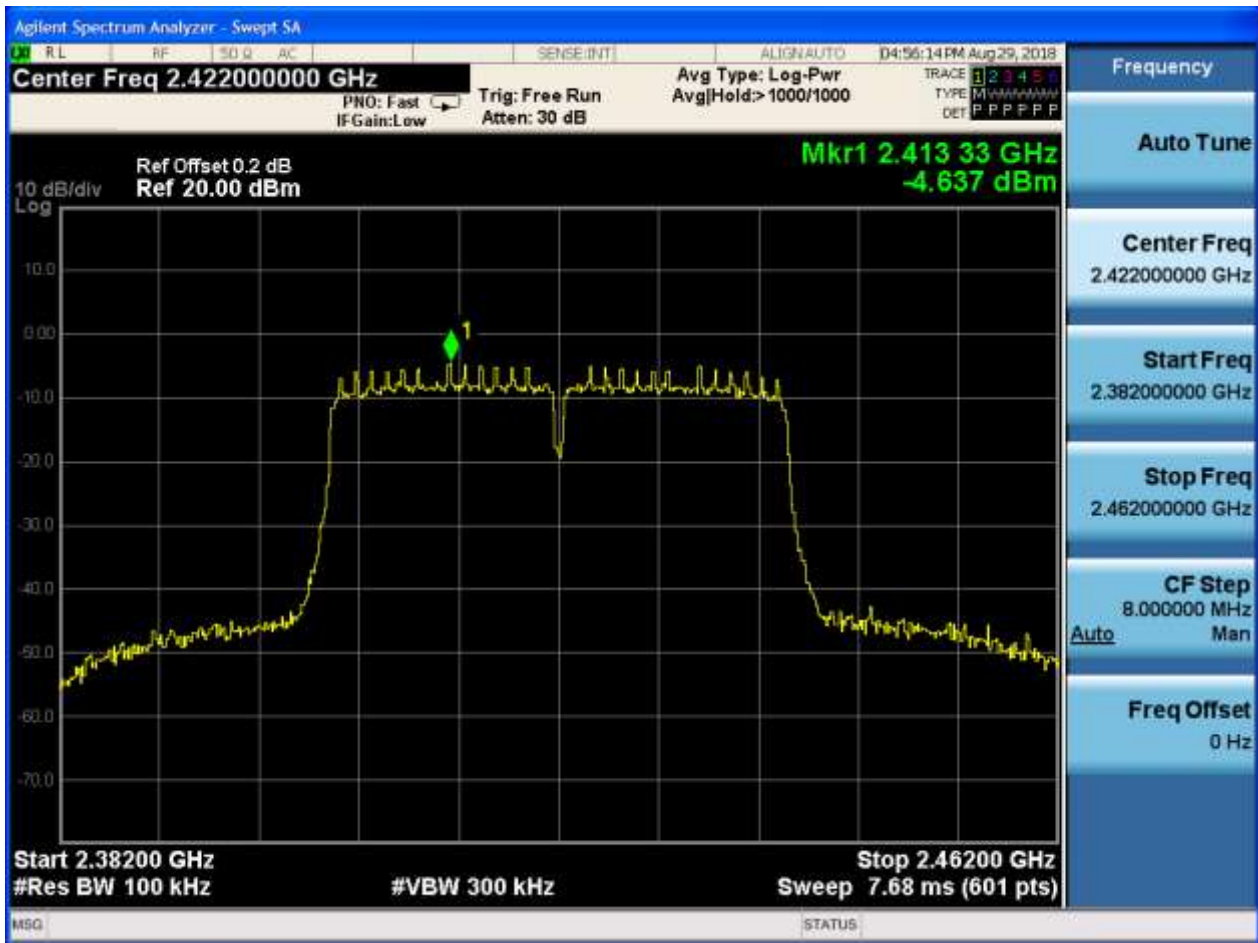




Puw:

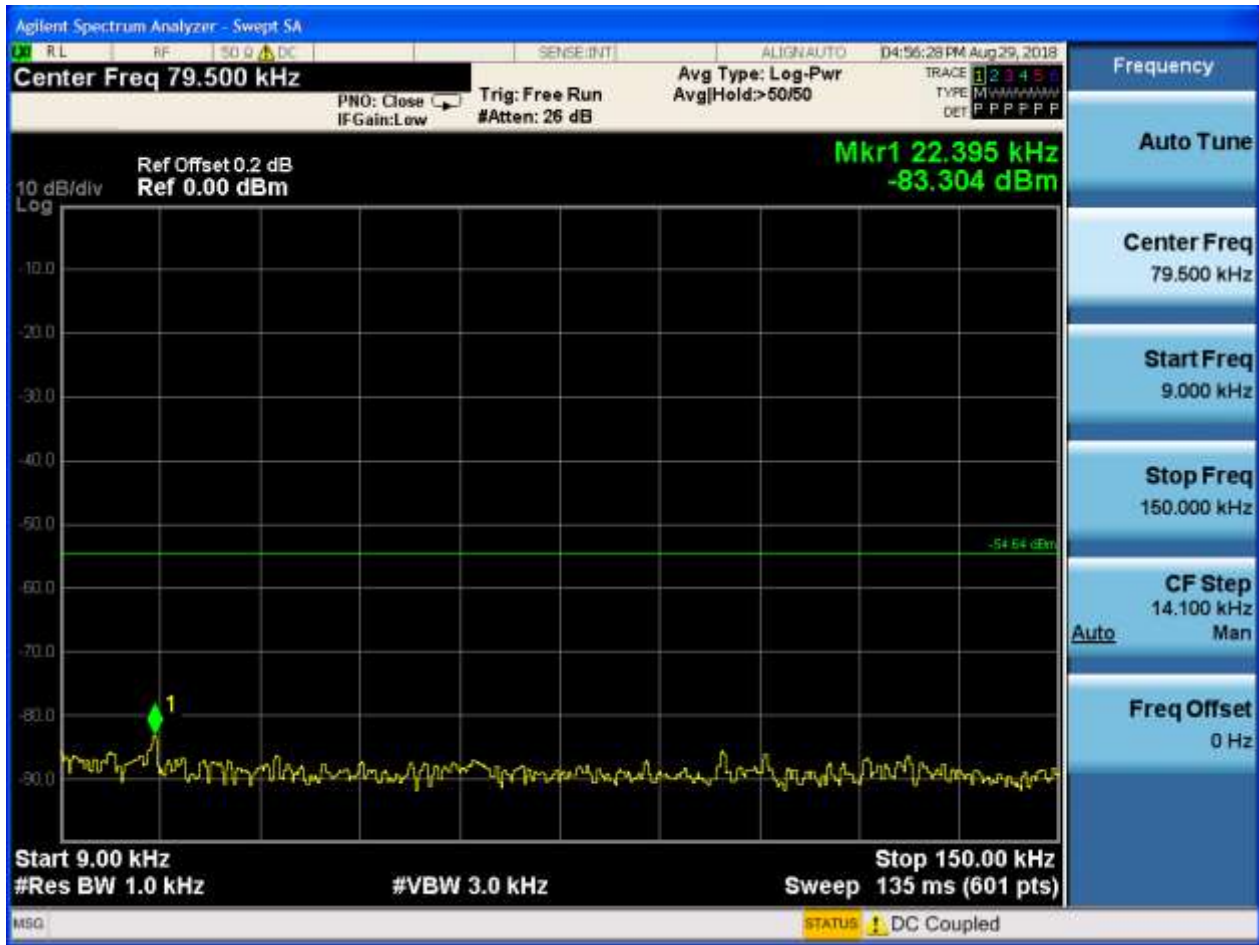

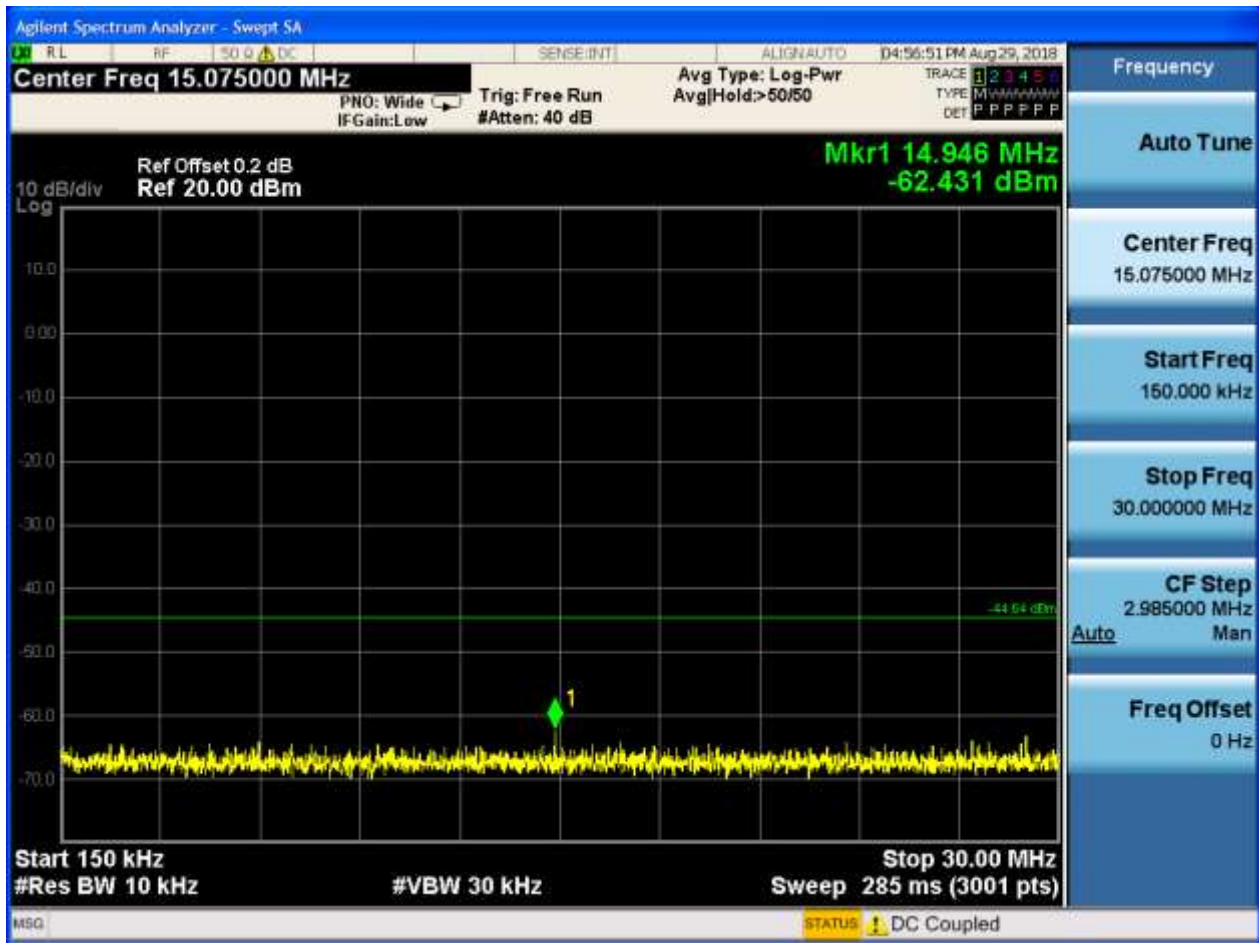





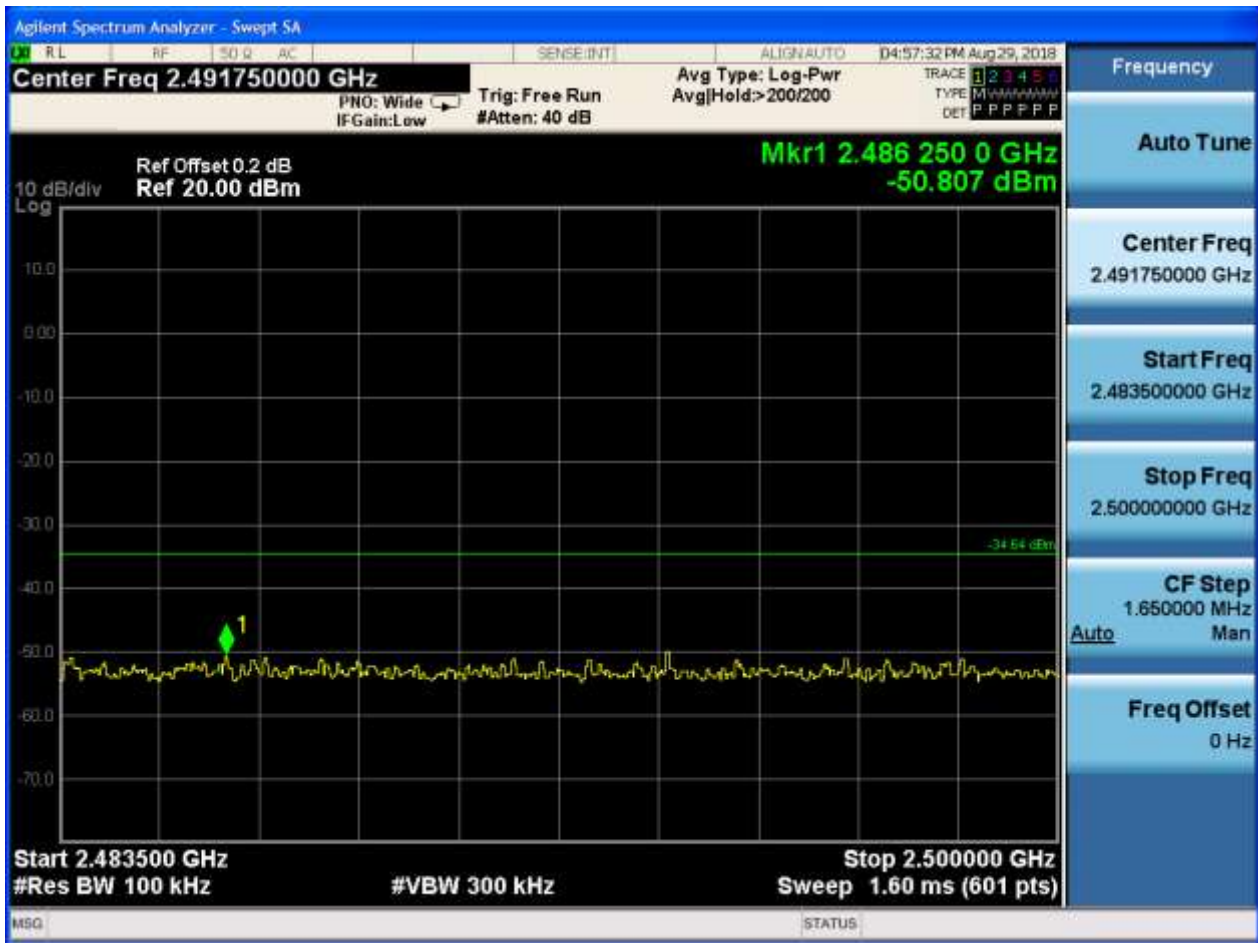







2.15 11N40_L_2427@Ant 1

Pref:

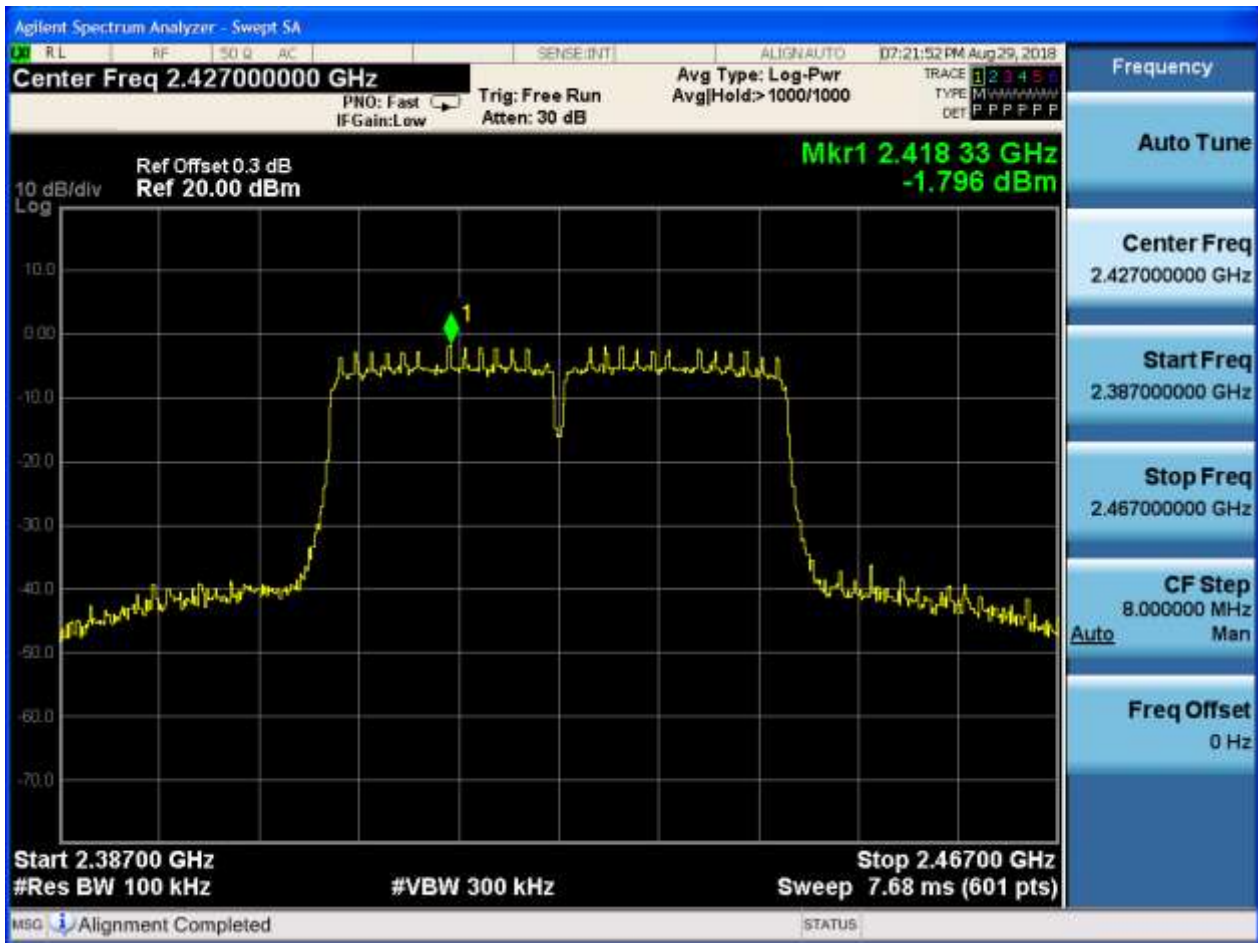

P_uw:

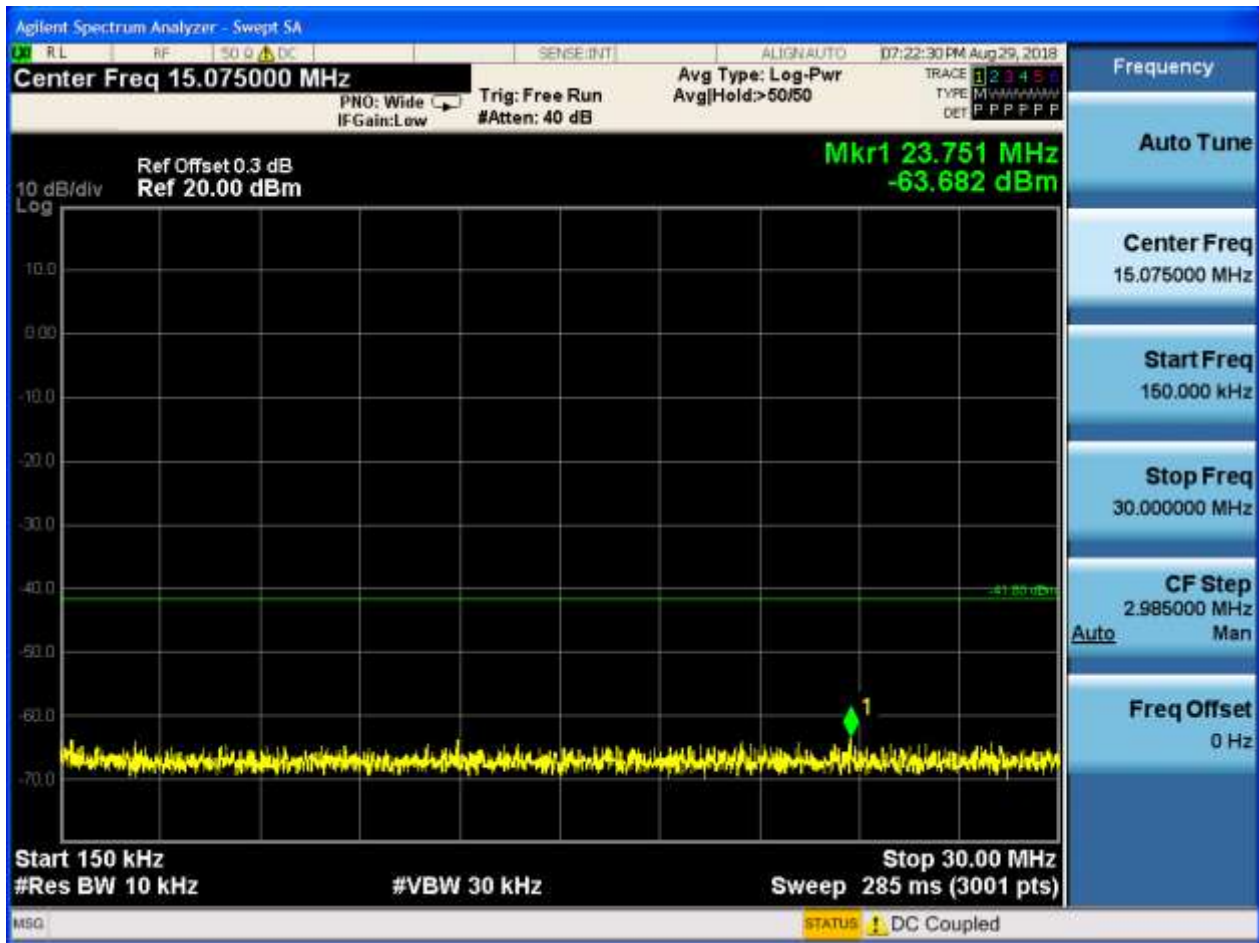













2.16 11N40_M_2437@Ant 1


Pref:

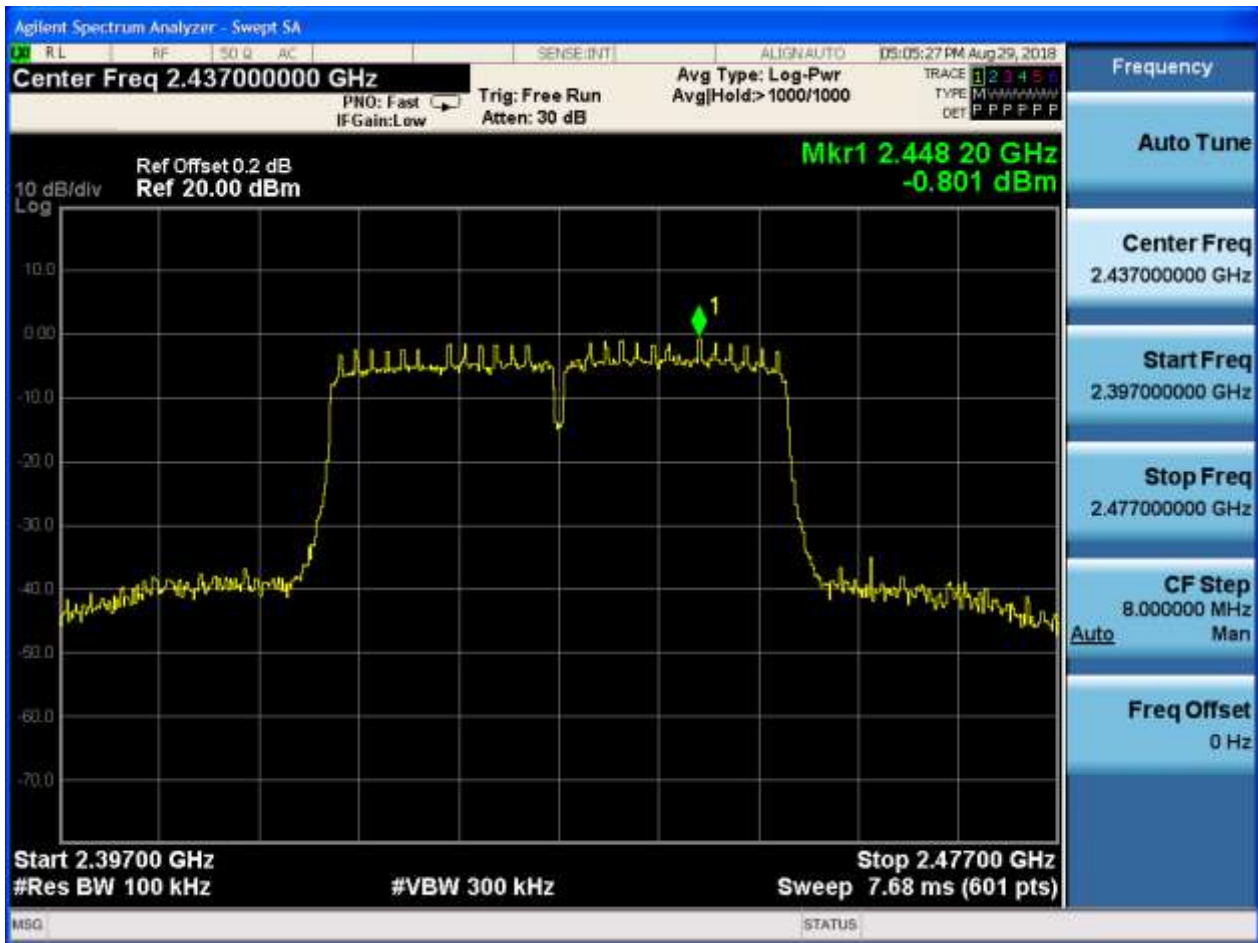




Puw:

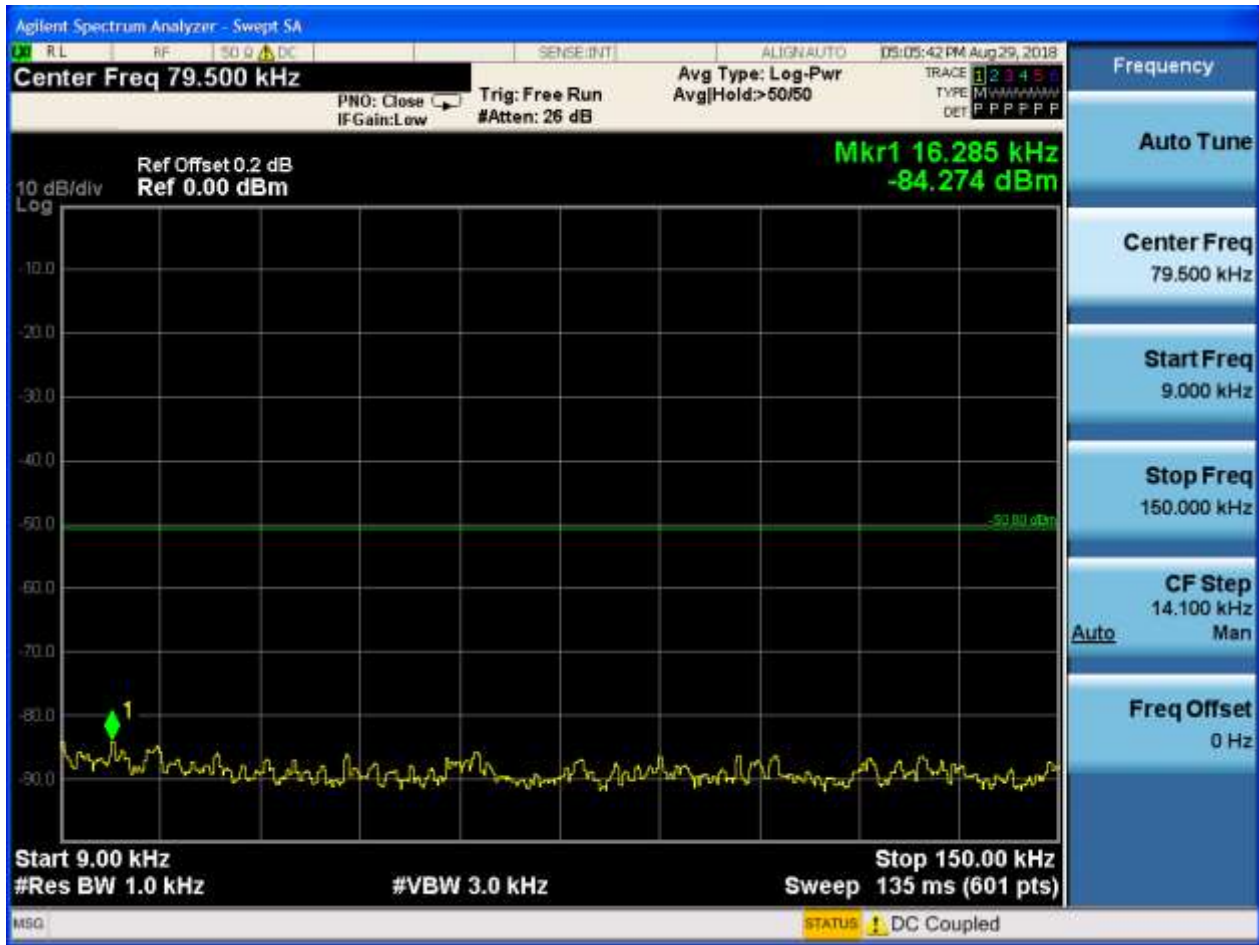

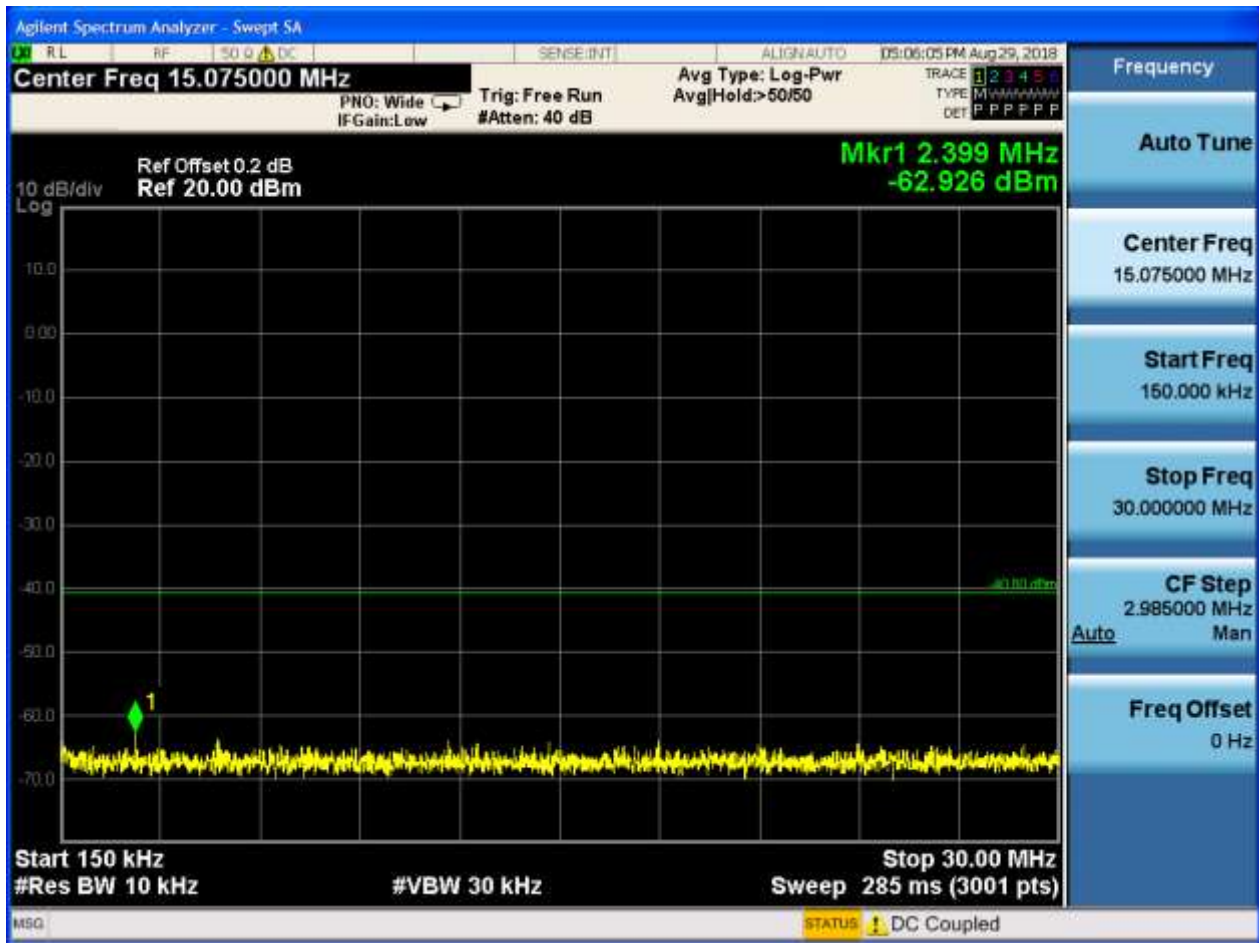

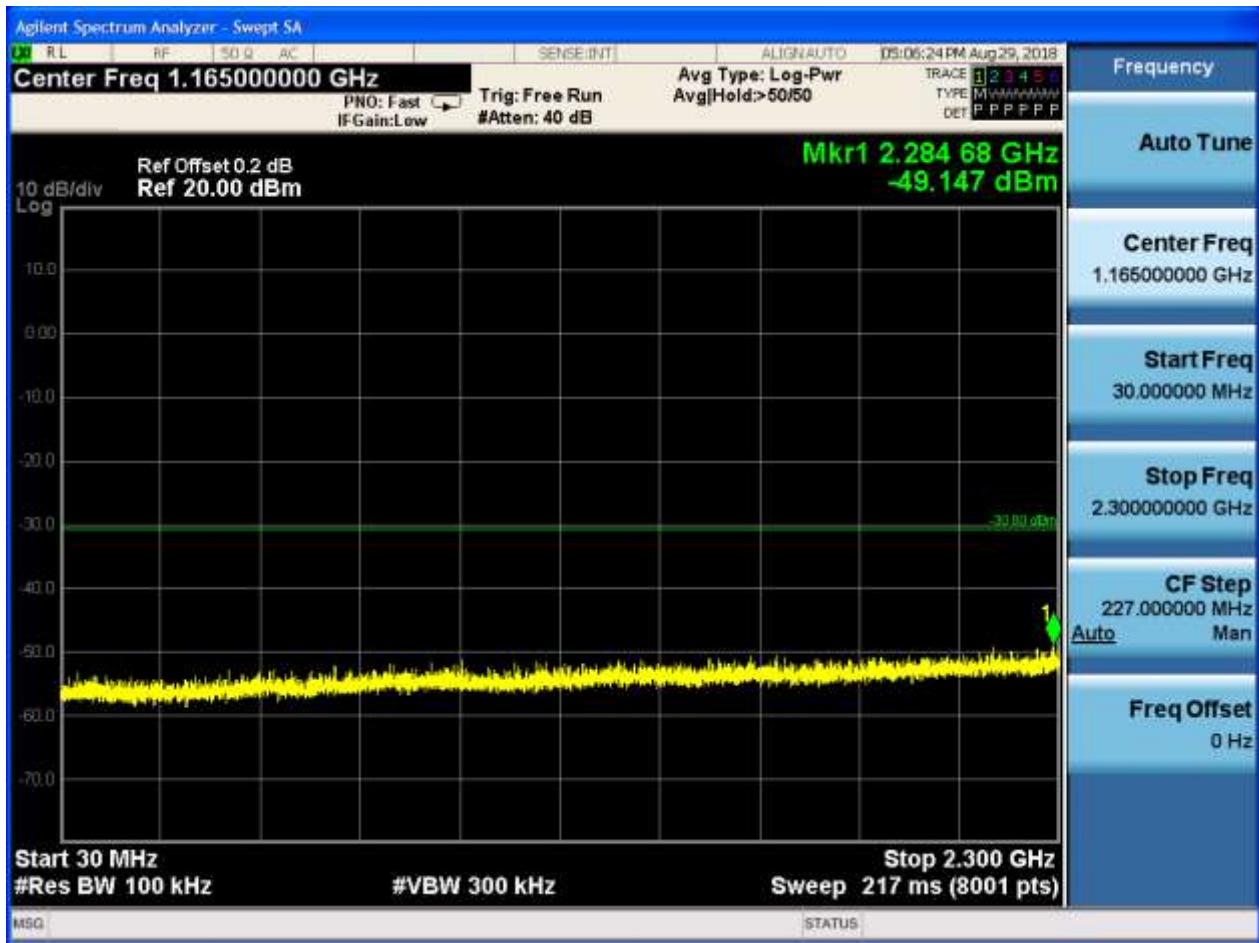










2.17 11N40_H_2447@Ant 1


Pref:

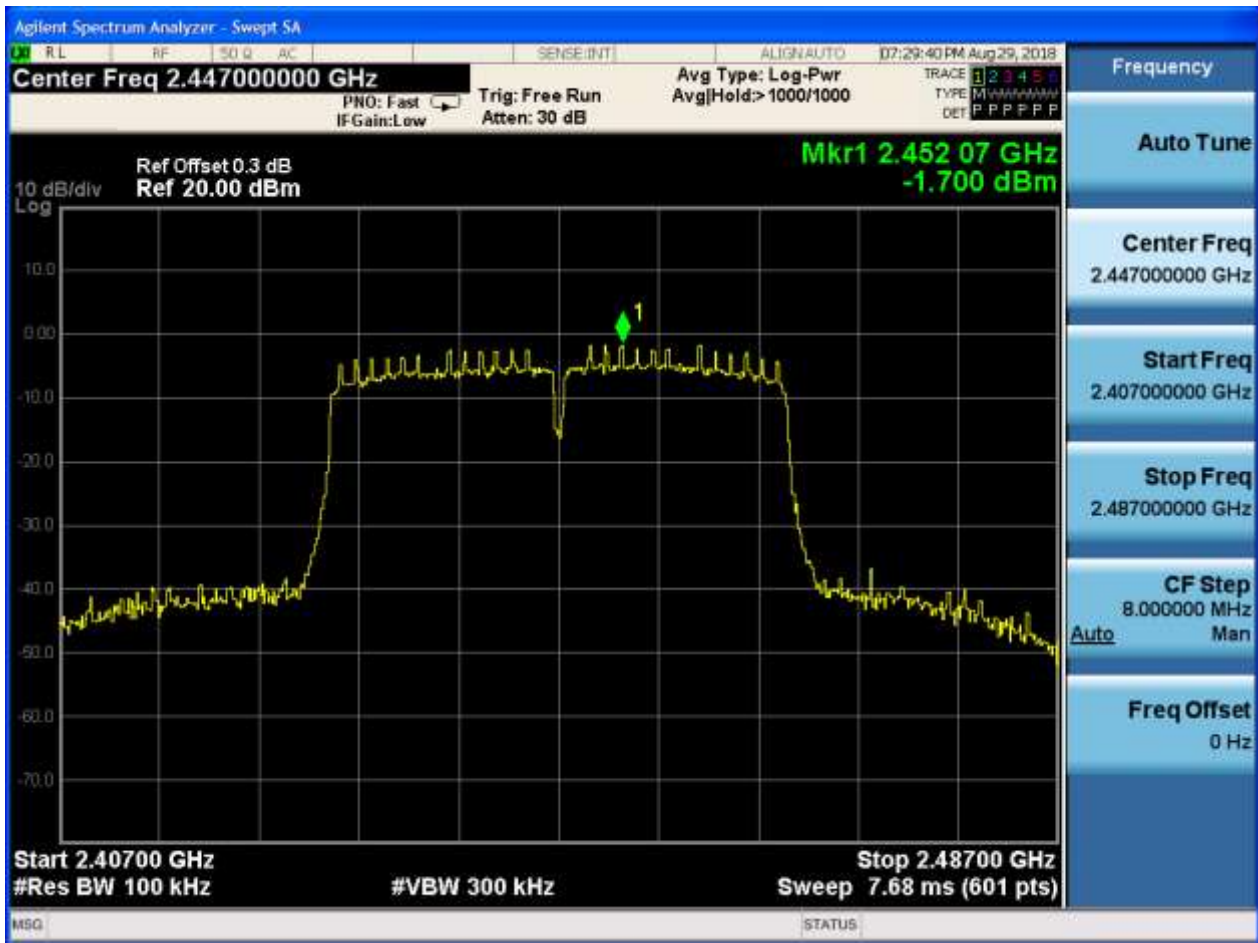





Puw:



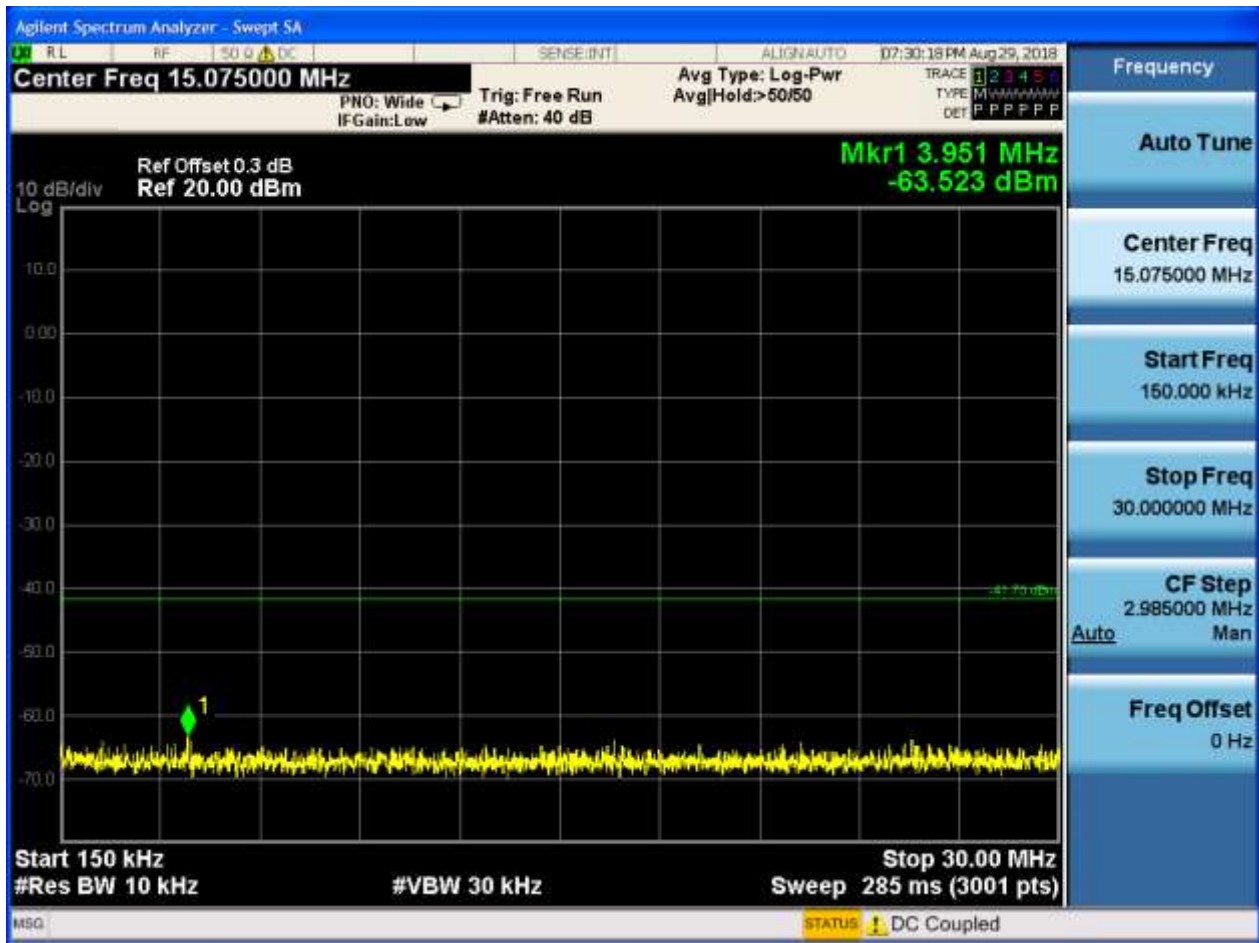

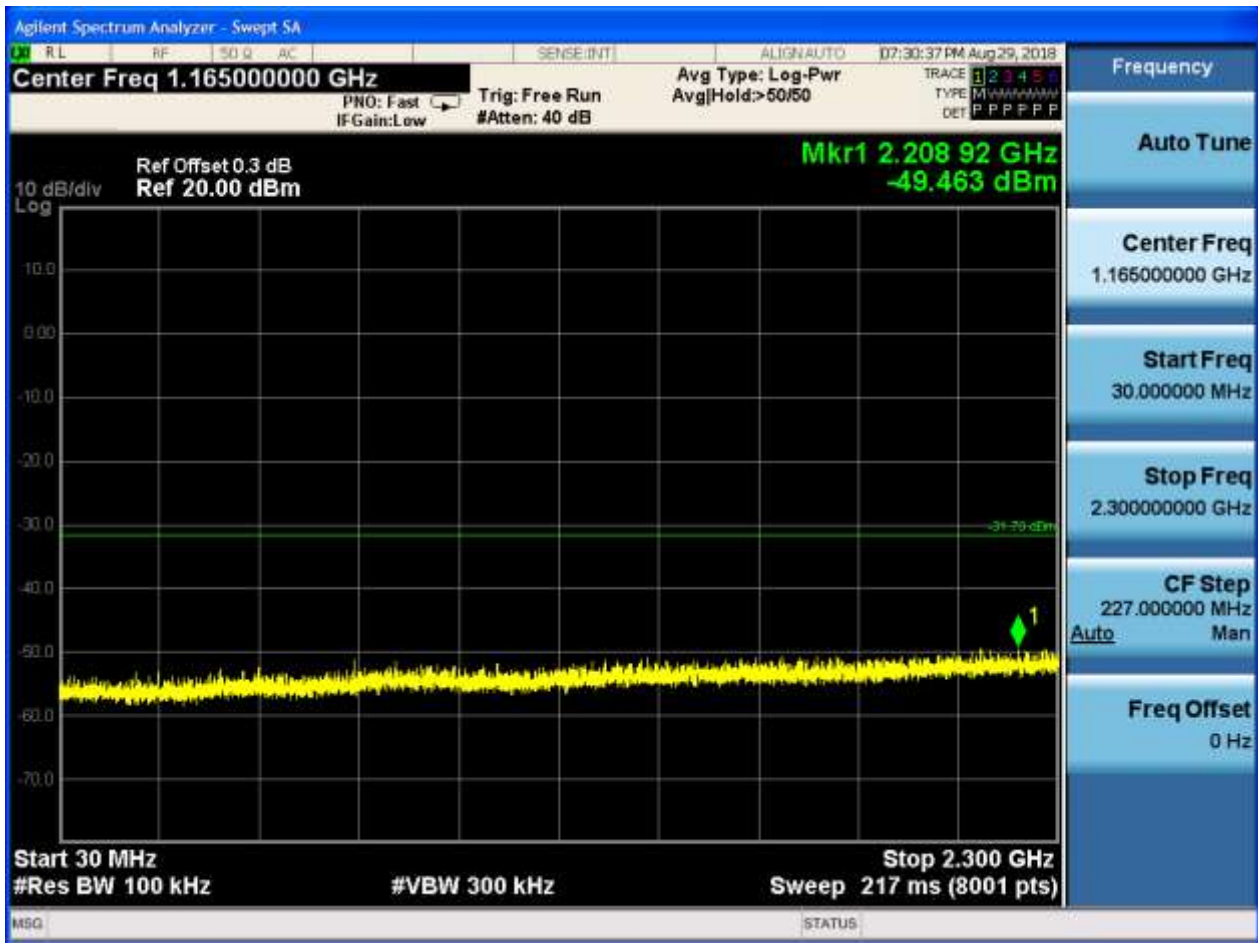

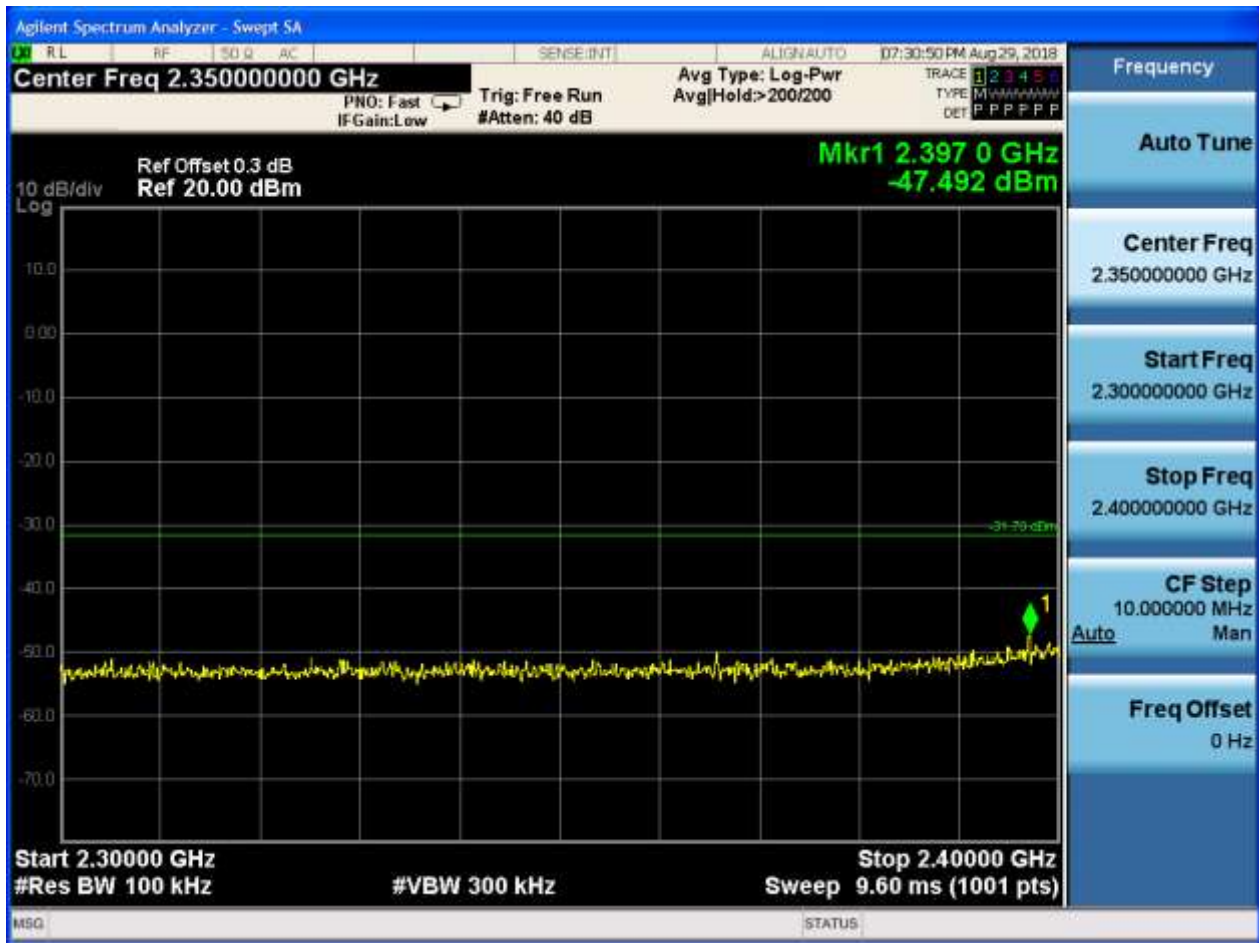








2.18 11N40_H_2452@Ant 1

Pref:

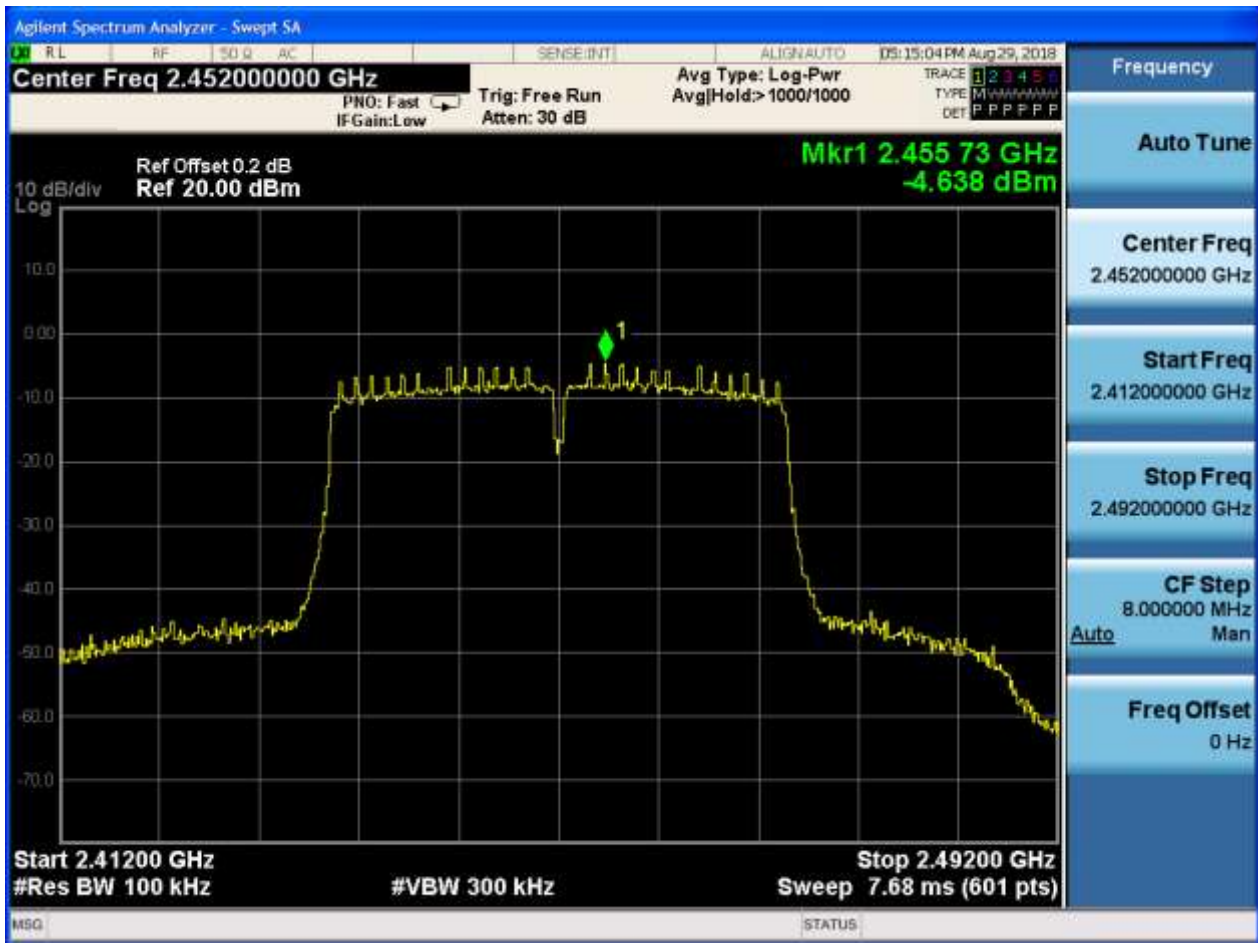



Agilent Spectrum Analyzer - Swept SA

Center Freq 79.500 kHz

Ref Offset 0.2 dB
Ref 0.00 dBm

Mkr1 12.525 kHz
-83.105 dBm

Start 9.00 kHz
#Res BW 1.0 kHz

Stop 150.00 kHz
Sweep 135 ms (601 pts)

#VBW 3.0 kHz

Trig: Free Run
#Atten: 26 dB

PNO: Close
IF Gain: Low

Avg Type: Log-Pwr
Avg|Hold>50/50

ALIGN AUTO

DS: 15:19 PM Aug 29, 2018

TRACE 1 2 3 4 5 6
TYPE M W W W W W W W
DET P P P P P P

Frequency

Auto Tune

Center Freq
79.500 kHz

Start Freq
9.000 kHz

Stop Freq
150.000 kHz

CF Step
14.100 kHz
Man


Auto

Freq Offset
0 Hz


MSG

STATUS

DC Coupled

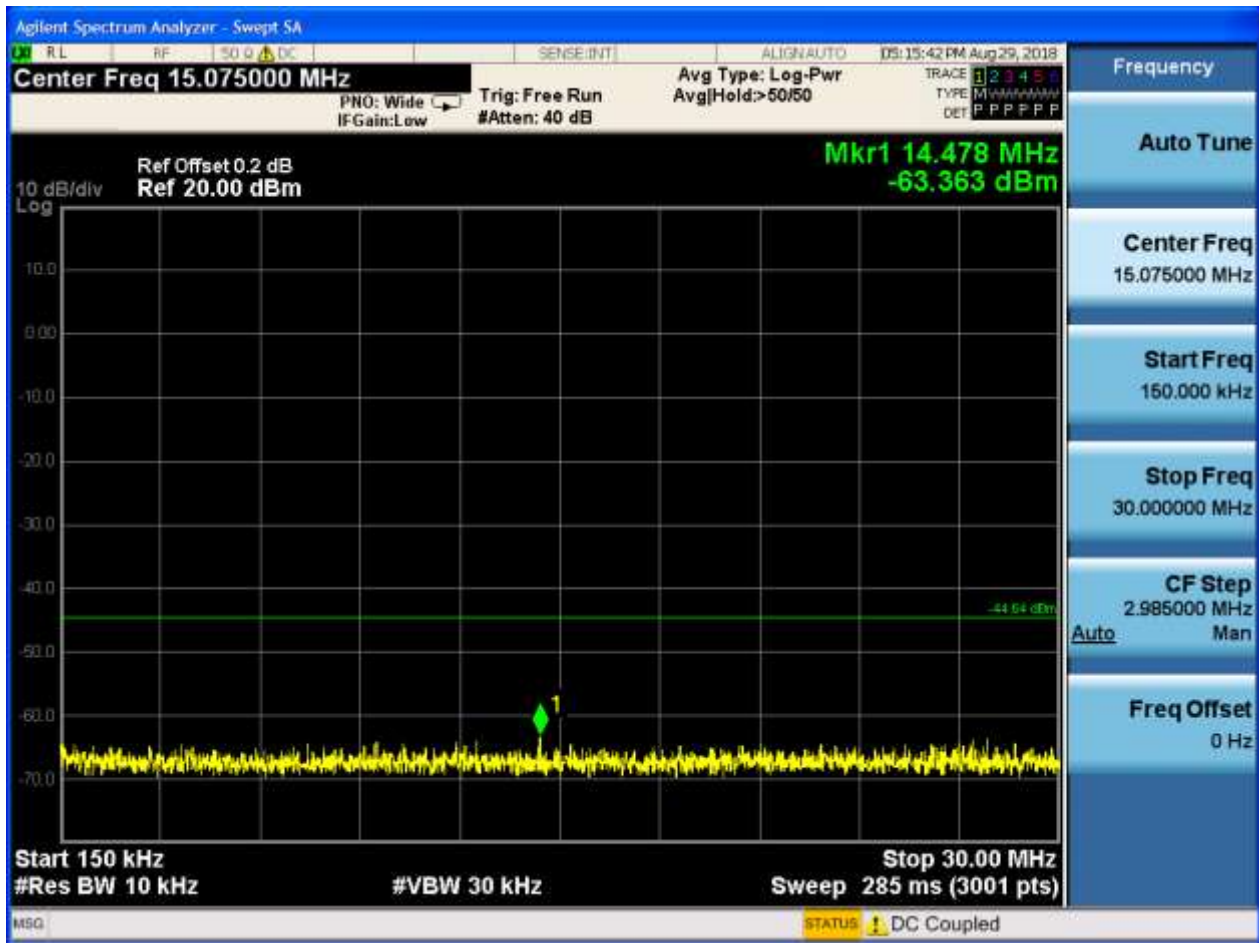



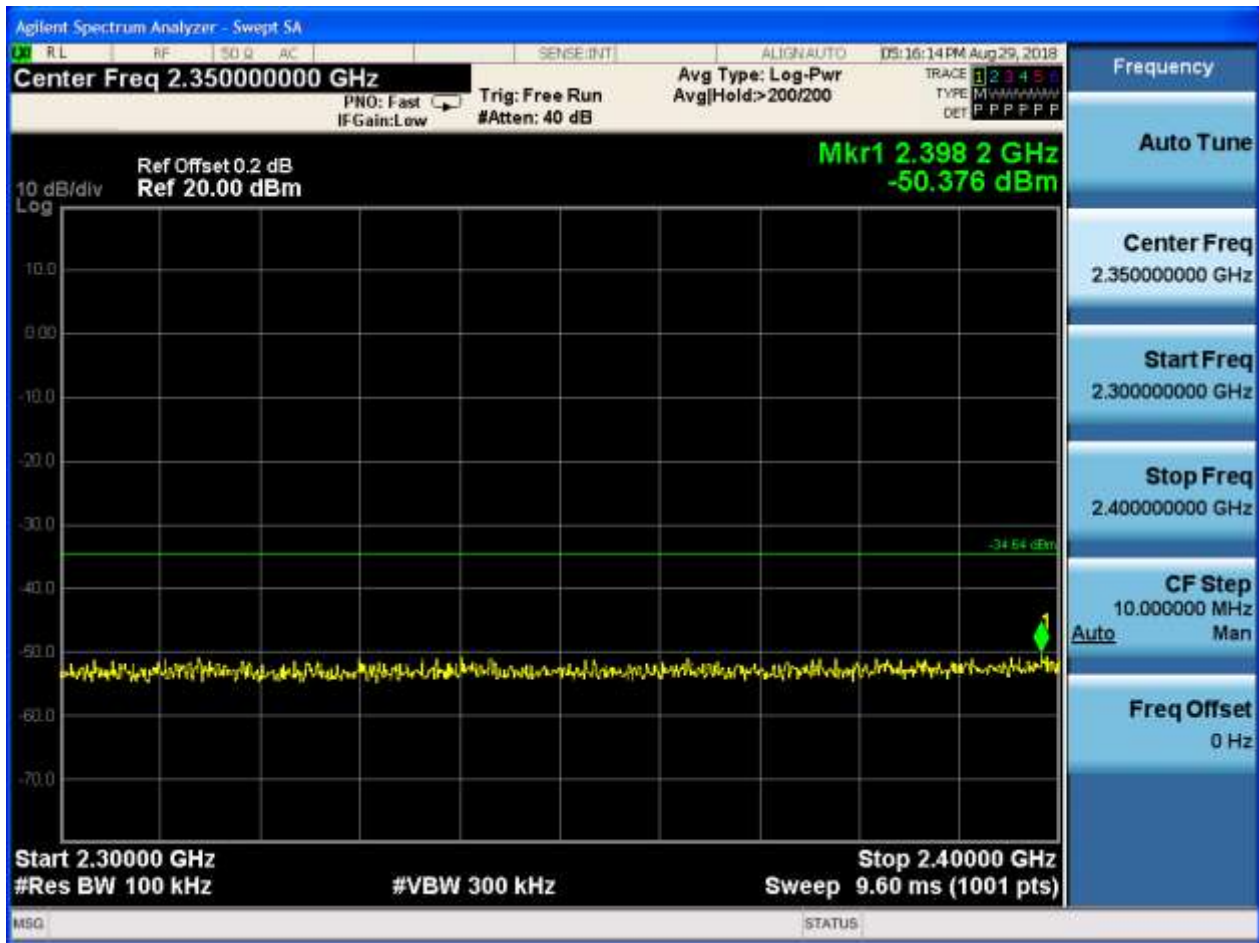







Appendix H: Radiated Spurious Emission & Spurious in Restricted Band

Note: We tested all modes, but the data presented below is the worst case.

9KHz-30MHz: RBW = 300Hz, VBW = 500Hz

150KHz-30MHz: RBW = 9 kHz, VBW = 30 kHz


30MHz-1GHz, RBW = 100 kHz, VBW = 300 kHz.

Above 1GHz, RBW = 1 MHz, VBW = 3 MHz.

The simultaneous transmission has been considered


1.1 Part 1: Testing Range of “9 kHz to 30MHz”

Note 1: The test results and plot for testing range of “9 kHz to 30MHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

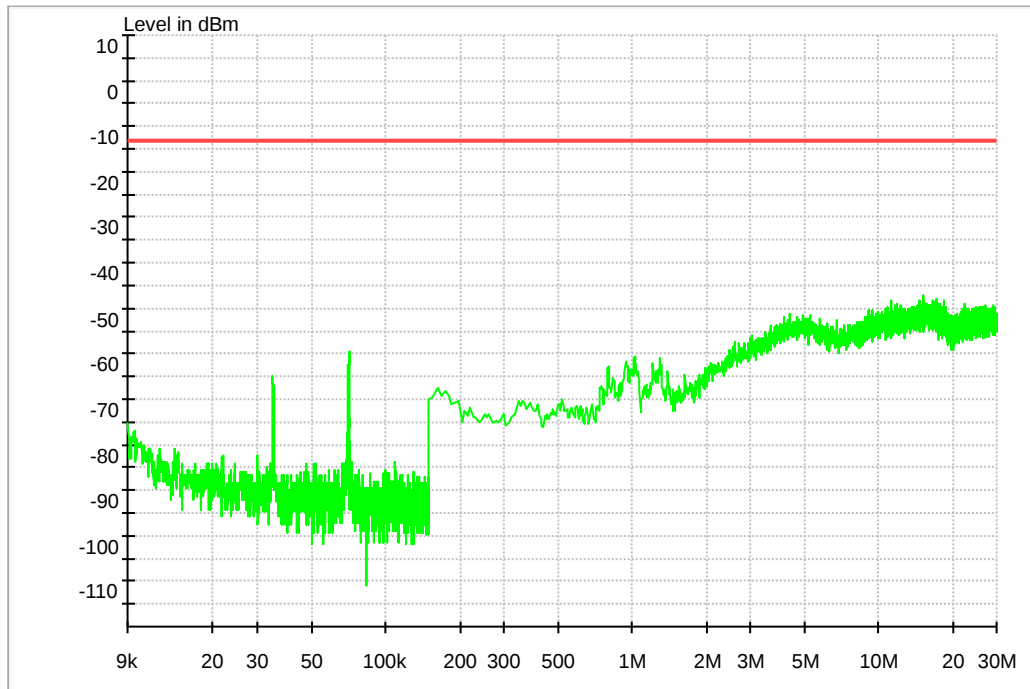

1.2 Part 2: Testing Range of “30 MHz to 1 GHz”

- Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

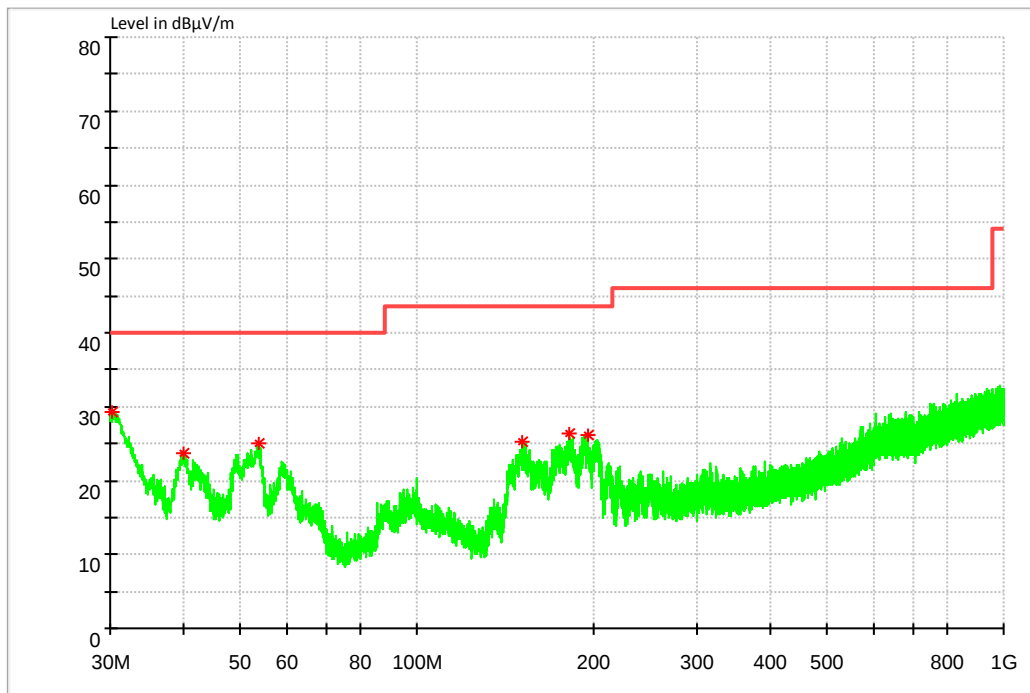

MEASUREMENT RESULT: QP Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
30.129333	29.24	40.00	10.76	100.0	V	71.0	13.2
39.991000	23.75	40.00	16.25	100.0	V	63.0	14.6
53.765000	25.03	40.00	14.97	100.0	V	3.0	14.2
150.765000	25.31	43.50	18.19	100.0	V	195.0	10.3
181.902000	26.40	43.50	17.10	100.0	V	167.0	12.1
195.352667	26.20	43.50	17.30	100.0	V	167.0	12.9

Note:

- 1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin = Limit - Level

1.3 Part 3: Testing Range of “1 GHz to 3 GHz”


Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.

Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).


Note 3: The peak spike exceeds the limit line is EUT's operating frequency.

Test Mode:

1.3.1 Test Mode: 11B

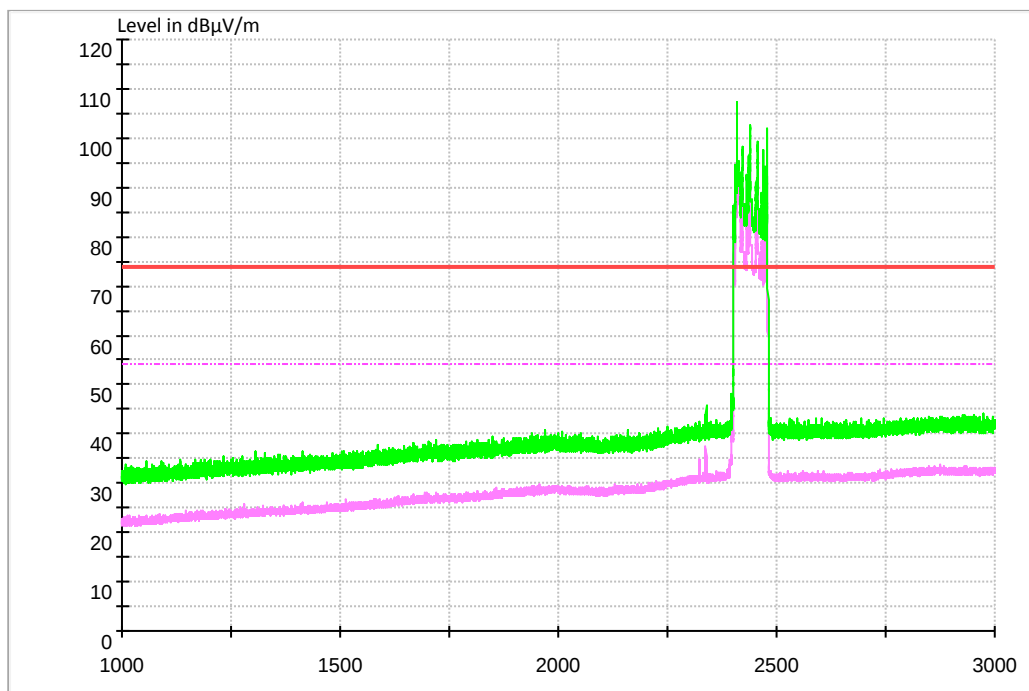

1.3.1.1 Channel 1 @Ant 1

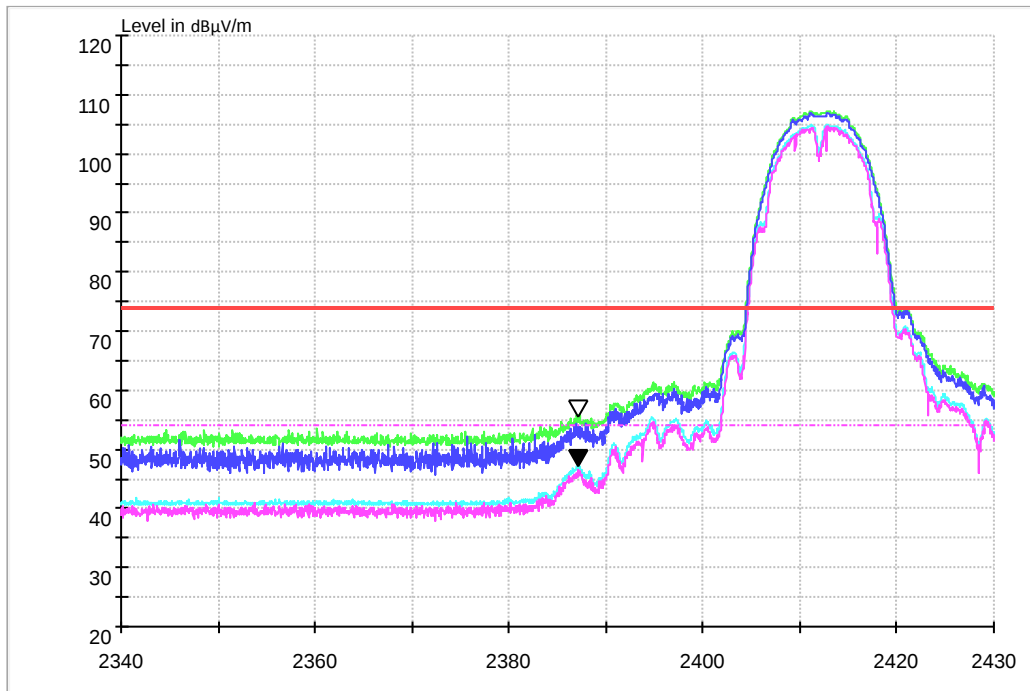

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2387.124	47.28	54.00	6.72	120.0	H	230.0	8.0

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2387.083	55.80	74.00	18.20	120.0	H	230.0	8.0


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.1.2 Channel 11 @Ant 1

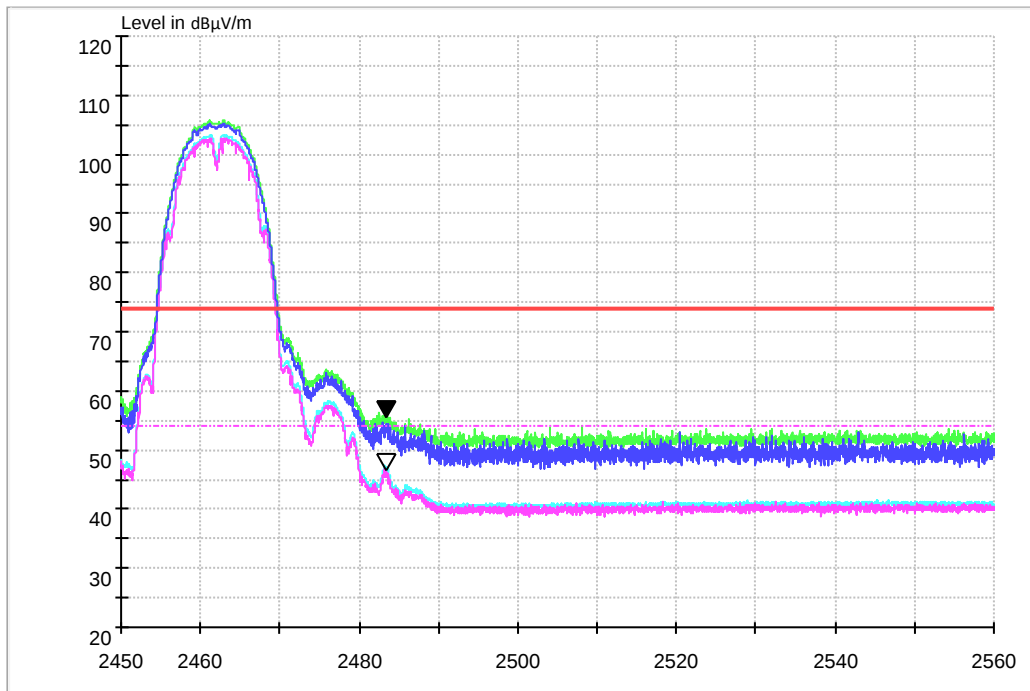

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.504	46.84	54.00	7.16	120.0	H	230.0	8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.532	55.81	74.00	18.19	120.0	H	230.0	8.5


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.2 Test Mode: 11G

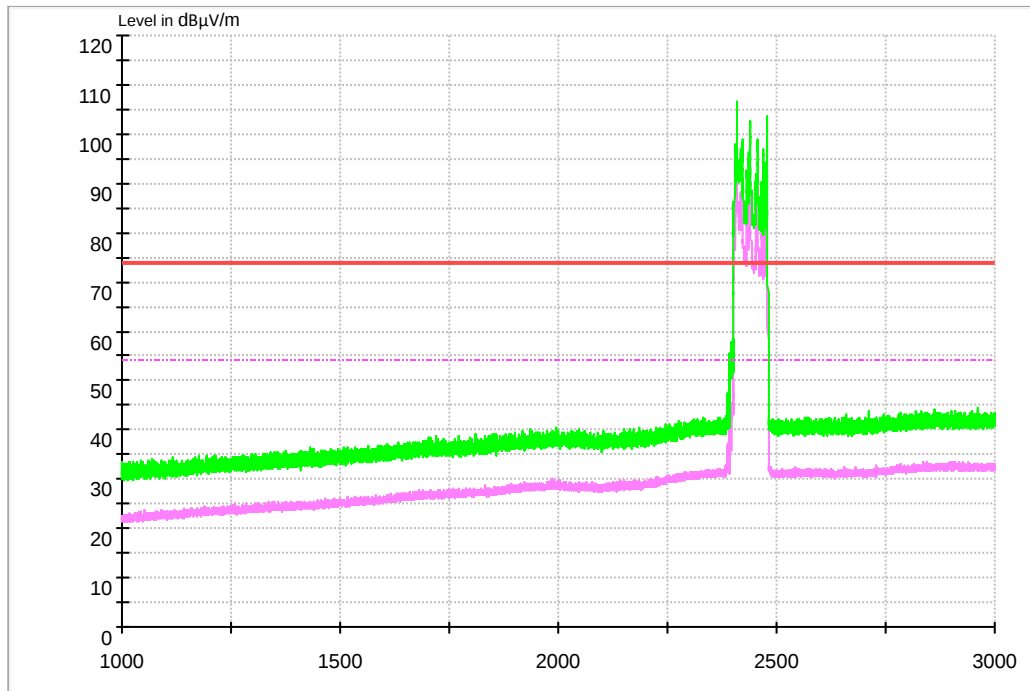

1.3.2.1 Channel 1 @Ant 1

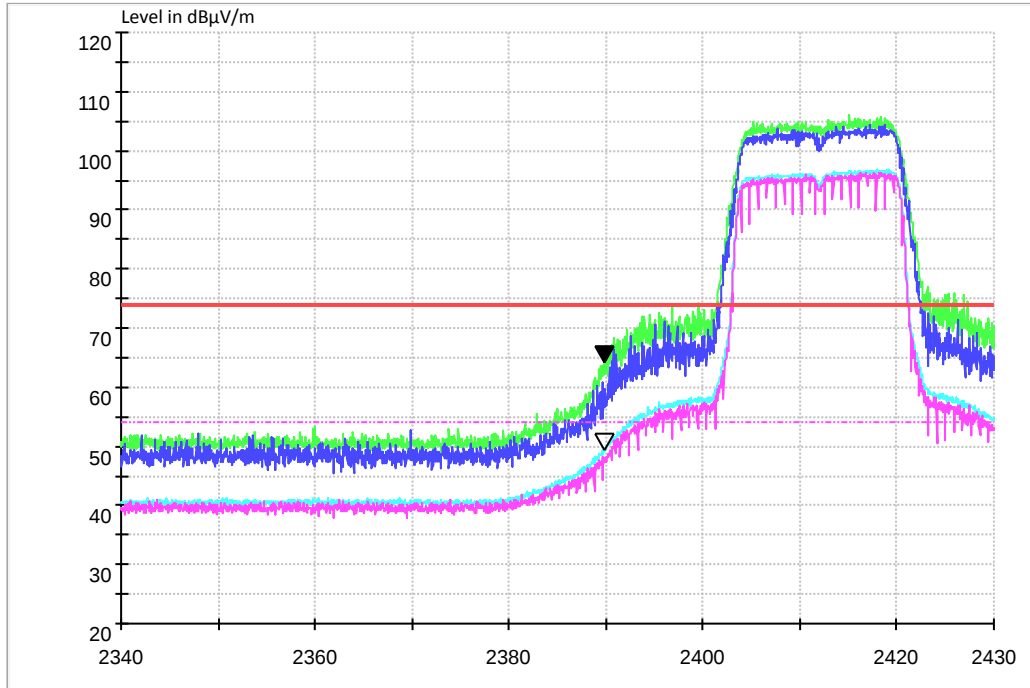

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2389.938	49.63	54.00	4.37	120.0	H	210.0	8.0

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2389.938	64.28	74.00	9.72	120.0	H	210.0	8.0


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2.2 Channel 2 @Ant 1

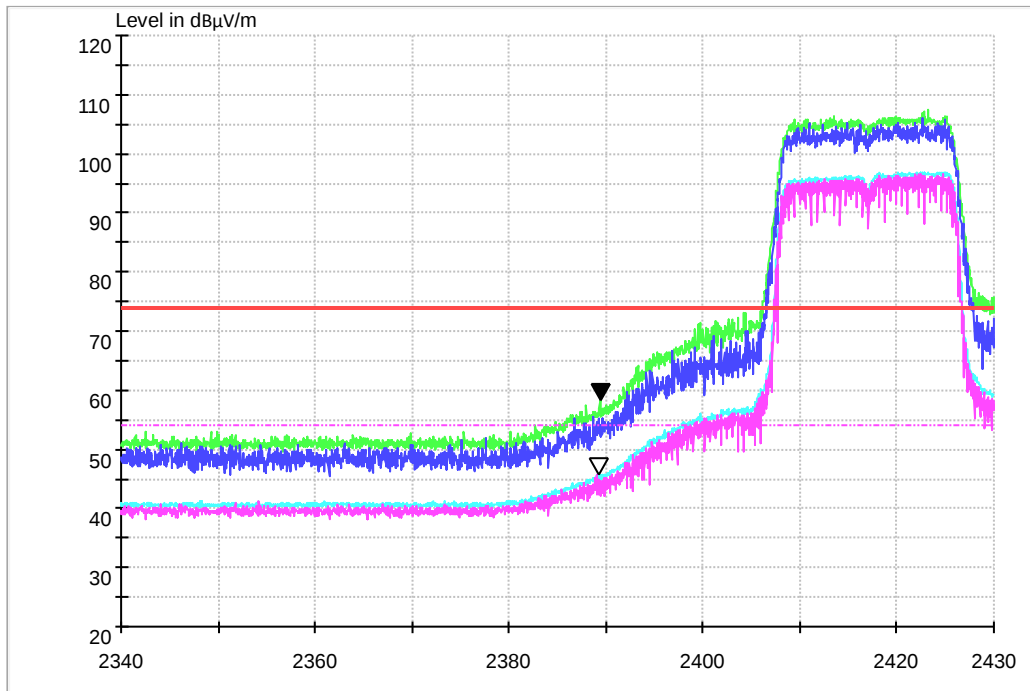

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2389.224	45.92	54.00	8.08	120.0	H	210.0	8.0

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2389.392	58.56	74.00	15.44	120.0	H	210.0	8.0


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.2.3 Channel 10 @Ant 1

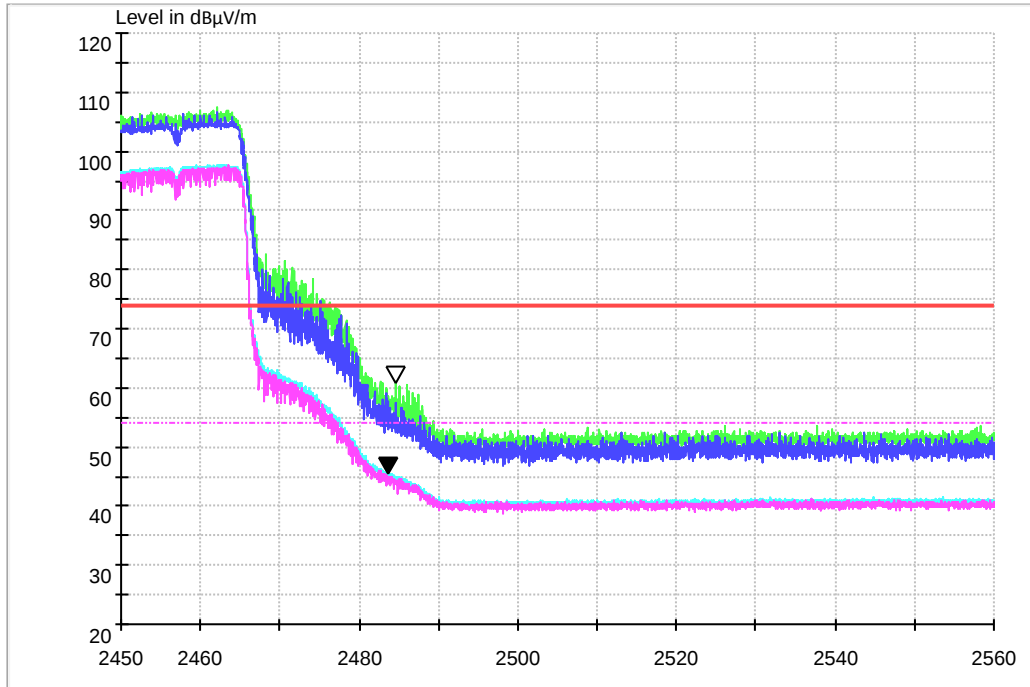

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.616	45.62	54.00	8.38	120.0	H	230.0	8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2484.596	60.97	74.00	13.03	120.0	H	230.0	8.5


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2.4 Channel 11@Ant 1

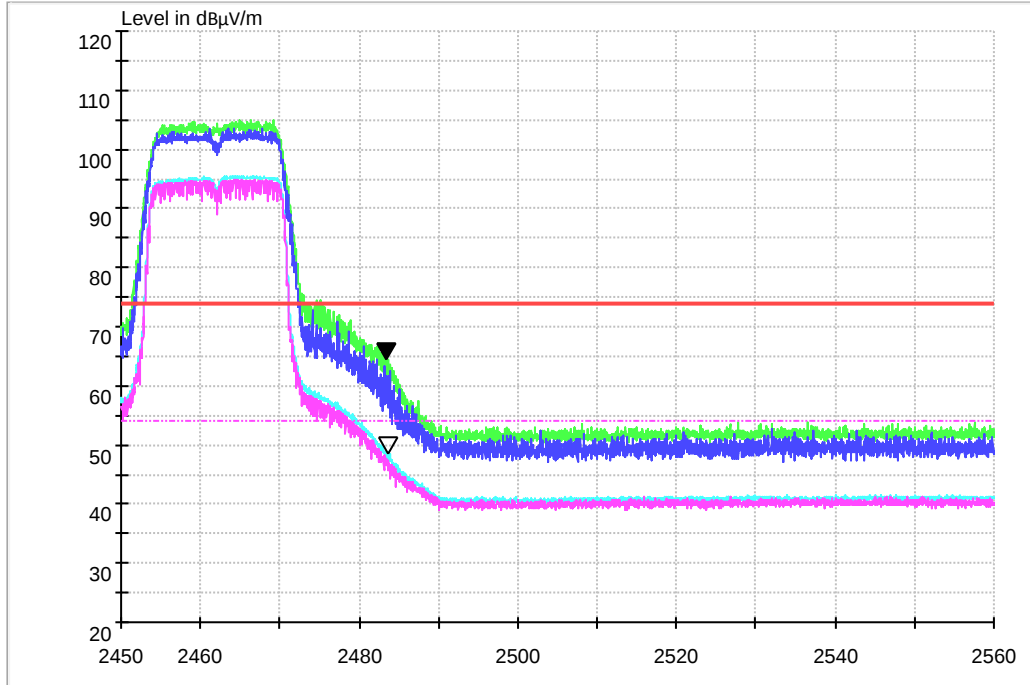

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.644	48.63	54.00	5.37	120.0	H	230.0	8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.504	64.68	74.00	9.32	120.0	H	230.0	8.5


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.3 Test Mode: 11N20

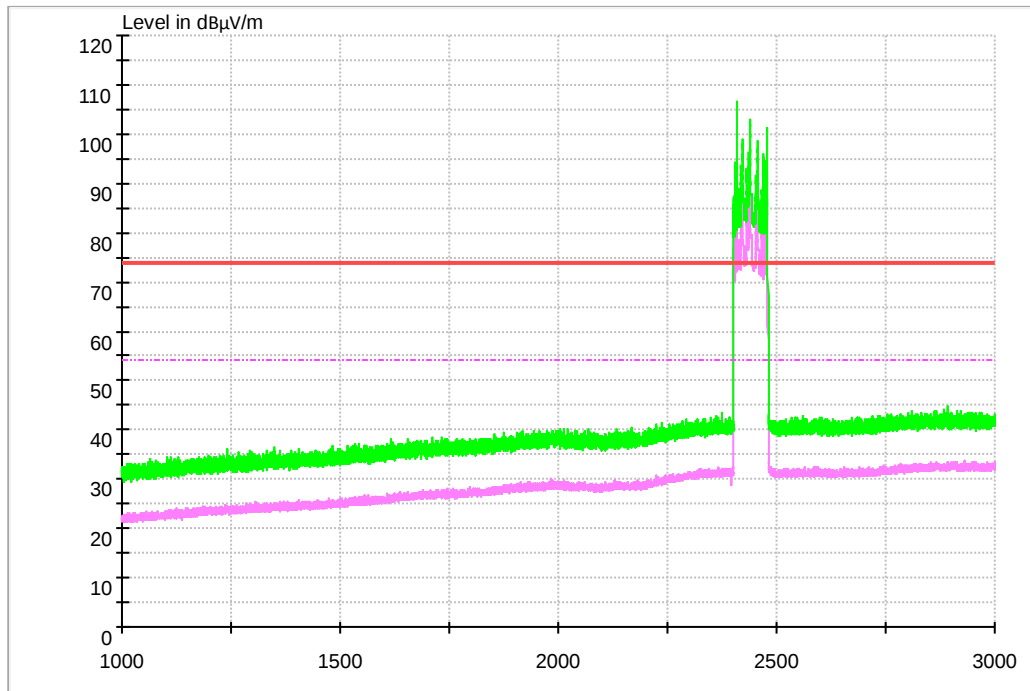

1.3.3.1 Channel 1 @Ant 1

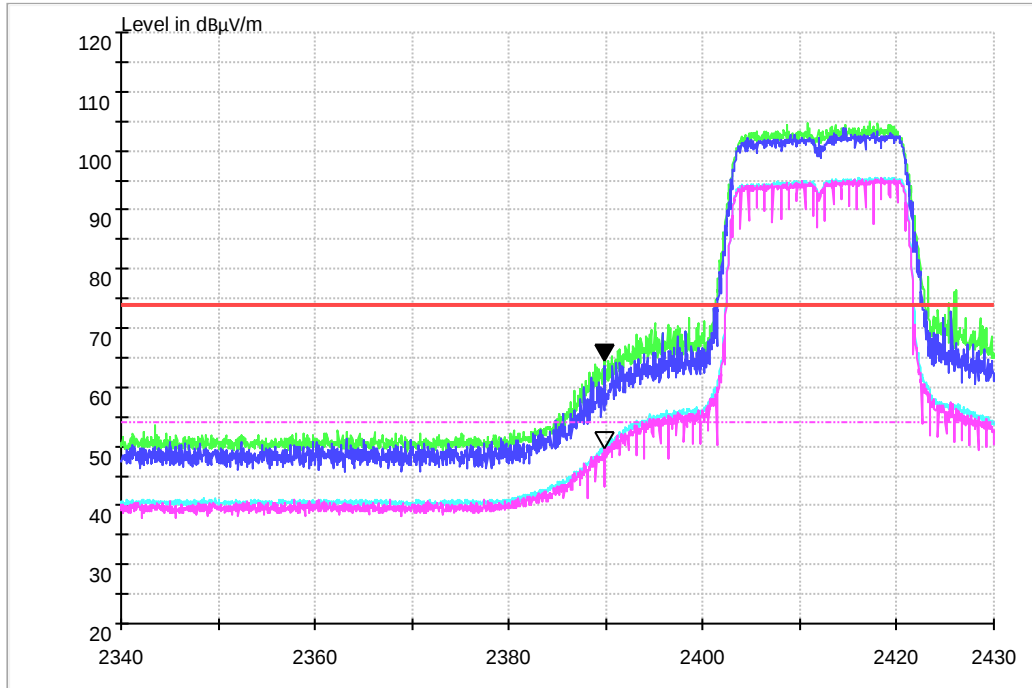

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2389.938	49.90	54.00	4.10	120.0	H	210.0	8.0

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2389.770	64.73	74.00	9.27	120.0	H	210.0	8.0


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.3.2 Channel 2@Ant 1

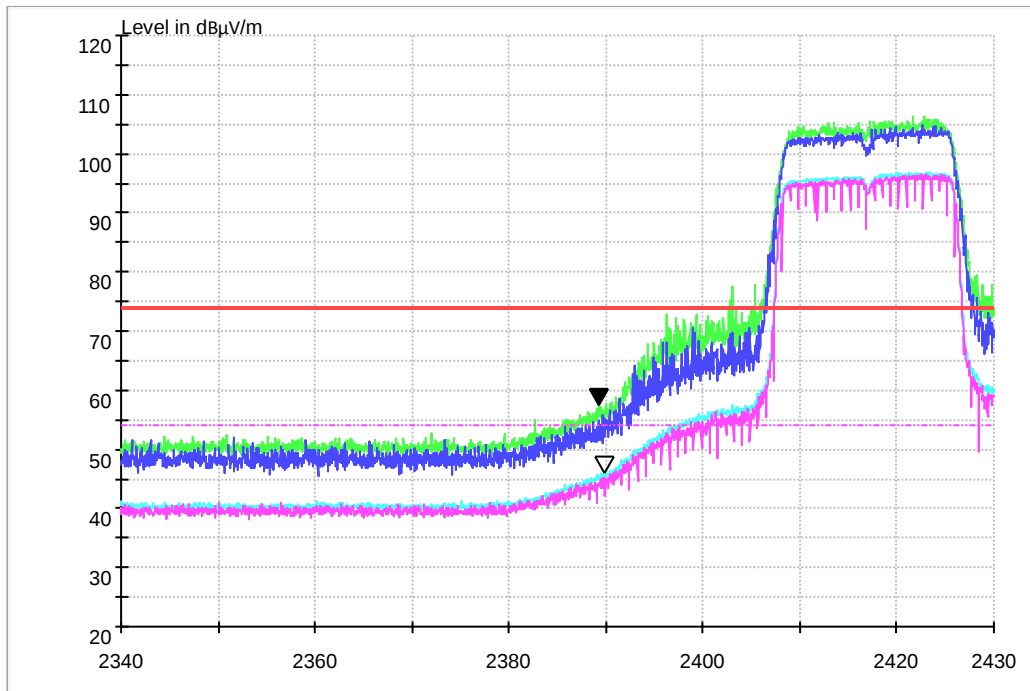

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2389.896	46.30	54.00	7.70	120.0	H	230.0	8.0

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2389.266	57.79	74.00	16.21	120.0	H	230.0	8.0


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.3.3 Channel 10 @Ant 1

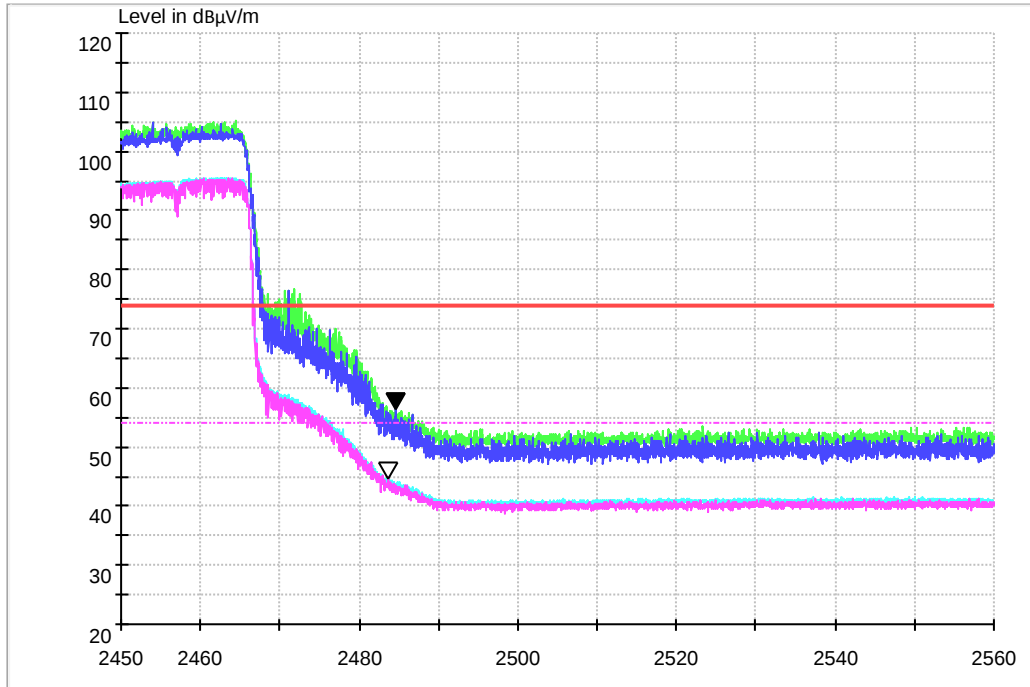

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.644	44.75	54.00	9.25	120.0	H	210.0	8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2484.680	56.47	74.00	17.53	120.0	H	210.0	8.5


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.3.4 Channel 11@Ant 1

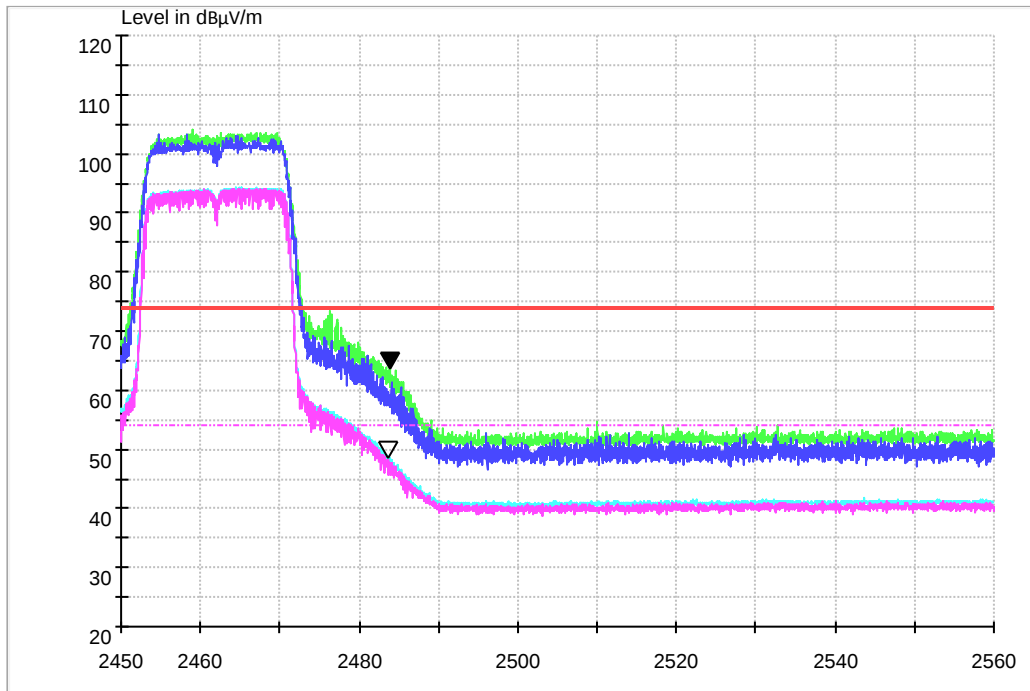

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.616	48.68	54.00	5.32	120.0	H	230.0	8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.784	63.96	74.00	10.04	120.0	H	230.0	8.5


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.4 Test Mode: 11N40

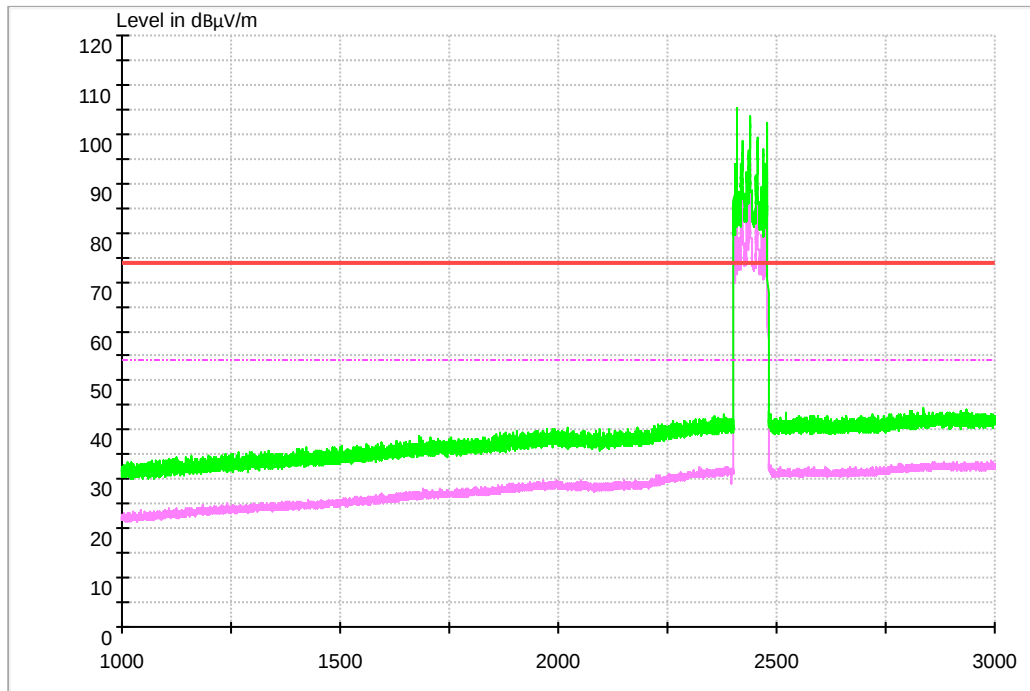

1.3.4.1 Channel 3 @Ant 1

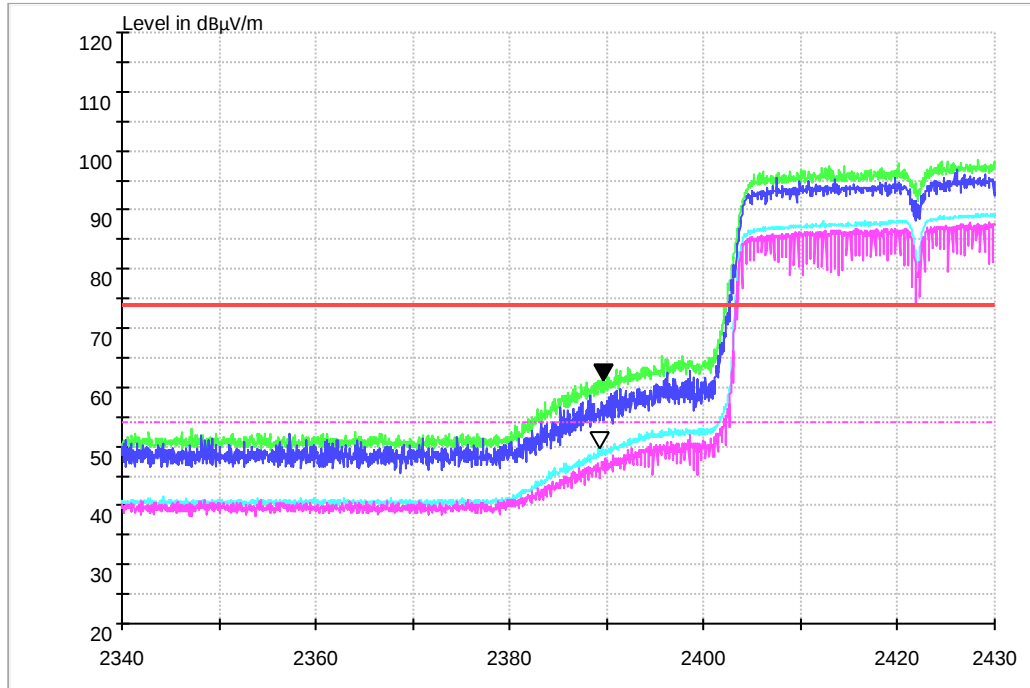

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2389.350	49.93	54.00	4.07	120.0	H	210.0	8.0

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2389.728	61.31	74.00	12.69	120.0	H	210.0	8.0

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level