



FCC SAR Compliance Test Report

Product Name: HUAWEI MediaPad T1 8.0 Pro

Model: T1-821L

Report No.: SYBH(Z-SAR)030082014-2

FCC ID: QIST1-821L

	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	<i>Wei Huanbin</i>	<i>Cheng Jia wen</i>
DATE	2014-11-13	2014-11-13

The test results of this test report relate exclusively to the item(s) tested, The HUAWEI does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of HUAWEI.

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

Table of Contents

1	General Information.....	5
1.1	Statement of Compliance	5
1.2	RF exposure limits.....	6
1.3	EUT Description	7
1.3.1	General Description	8
1.4	Test specification(s).....	9
1.5	Testing laboratory.....	9
1.6	Applicant and Manufacturer	9
1.7	Application details.....	9
1.8	Ambient Condition	9
2	SAR Measurement System	10
2.1	SAR Measurement Set-up	10
2.2	Test environment.....	11
2.3	Data Acquisition Electronics description	11
2.4	Probe description.....	12
2.5	Phantom description.....	13
2.6	Device holder description	14
2.7	Test Equipment List.....	15
3	SAR Measurement Procedure	16
3.1	Scanning procedure	16
3.2	Spatial Peak SAR Evaluations	17
3.3	Data Storage and Evaluation	18
4	System Verification Procedure	20
4.1	Tissue Verification	20
4.2	System Check	24
4.3	System check Procedure.....	25
5	SAR measurement variability and uncertainty	26
5.1	SAR measurement variability	26
5.2	SAR measurement uncertainty	26
6	SAR Test Configuration.....	27
6.1	GSM Test Configuration	27
6.2	UMTS Test Configuration	27
6.3	LTE Test Configuration.....	33
6.4	WiFi 2.4G Test Configuration	35
6.5	WiFi 5G Test Configuration	35
7	SAR Measurement Results	36
7.1	Conducted power measurements	36
7.1.1	Conducted power measurements of GSM850	37
7.1.2	Conducted power measurements of GSM1900	38
7.1.3	Conducted power measurements of UMTS Band V.....	39
7.1.4	Conducted power measurements of UMTS Band IV.....	40
7.1.5	Conducted power measurements of UMTS Band II	41
7.1.6	Conducted power measurements of LTE Band IV	42
7.1.7	Conducted power measurements of LTE Band II.....	45
7.1.8	Conducted power measurements of LTE Band VII	48
7.1.9	Conducted power measurements of WiFi 2.4G.....	50
7.1.10	Conducted power measurements of WiFi 5G.....	51
7.1.11	Conducted power measurements of BT	53
7.2	SAR measurement Results	54
7.2.1	SAR measurement Result of GSM850.....	56
7.2.2	SAR measurement Result of GSM1900.....	57
7.2.3	SAR measurement Result of UMTS Band V	58
7.2.4	SAR measurement Result of UMTS Band IV	59
7.2.5	SAR measurement Result of UMTS Band II	60
7.2.6	SAR measurement Result of LTE Band IV.....	61
7.2.7	SAR measurement Result of LTE Band II	65
7.2.8	SAR measurement Result of LTE Band VII.....	68
7.2.9	SAR measurement Result of WiFi 2.4G	72
7.2.10	SAR measurement Result of WiFi 5G	73
7.3	Multiple Transmitter Evaluation	75
7.3.1	Stand-alone SAR Test Exclusion.....	76



7.3.2	Simultaneous Transmission Possibilities	77
7.3.3	SAR Summation Scenario	78
7.3.4	SPLSR Evaluation Analysis	85
Appendix A. System Check Plots.....		104
Appendix B. SAR Measurement Plots.....		104
Appendix C. Calibration Certificate		104
Appendix D. Photo documentation.....		104

※ ※ **Modified History** ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2014-11-13	Cheng Jiawen

1 General Information

1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for T1-821L is as below Table 1.

Band	MAX Reported SAR _{1g} (W/kg)	
	Head	Body 0mm
GSM850	0.575	1.497
GSM1900	0.619	1.025
UMTS Band V	0.640	1.052
UMTS Band IV	0.906	1.097
UMTS Band II	1.485	1.358
LTE Band IV	1.447	1.447
LTE Band II	1.128	1.026
LTE Band VII	1.192	1.392
WiFi 2.4G	0.016	1.420
WiFi 5G	0.014	1.486
The highest simultaneous SAR is 1.551W/kg per KDB690783 D01		

Table 1:Summary of test result

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2003 & IEEE Std 1528a-2005.

1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

1.3 EUT Description

Device Information:			
Product Name:	HUAWEI MediaPad T1 8.0 Pro		
Models:	T1-821L		
FCC ID :	QIST1-821L		
SN No.:	B6F0114901000082		
Device Type :	Portable device		
Device Phase:	Identical Prototype		
Exposure Category:	Uncontrolled environment / general population		
Hardware Version :	SH1T1821LM		
Software Version :	T1-821LV100R001C001		
Antenna Type :	Internal antenna		
Others Accessories	Headset		
Device Operating Configurations:			
Supporting Mode(s)	GSM850/1900, UMTS Band V/IV/II, LTE Band IV/III/VII, WiFi 2.4G/ WiFi 5G(Tested); BT(Untested)		
Test Modulation	GSM(GMSK/8PSK),UMTS(QPSK),LTE(QPSK/16QAM), WiFi(DSSS/OFDM)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band V	824-849	869-894
	UMTS Band IV	1710-1755	2110-2155
	UMTS Band II	1850-1910	1930-1990
	LTE Band IV	1710-1755	2110-2155
	LTE Band II	1850-1910	1930-1990
	LTE Band VII	2500-2570	2620-2690
	WiFi 2.4G	2412-2462	
	WiFi 5G	5150-5250	
		5250-5350	
		5470-5725	
5725-5850			
BT	2402-2480		
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
Power Class:	4,tested with power level 5(GSM850)		
	1,tested with power level 0(GSM1900)		
	3, tested with power control “all 1”(UMTS Band V)		
	3, tested with power control “all 1”(UMTS Band IV)		
	3, tested with power control “all 1”(UMTS Band II)		
	3, tested with power control all Max.(LTE Band IV)		
	3, tested with power control all Max.(LTE Band II)		
	3, tested with power control all Max.(LTE Band VII)		
Test Channels (low-mid-high):	128-190-251(GSM850)		
	512-661-810(GSM1900)		

Test Channels (low-mid-high):	4132-4182-4233(UMTS Band V)
	1312-1413-1513(UMTS Band IV)
	9262-9400-9538(UMTS Band II)
	19957-20175-20393(LTE Band IV BW=1.4MHz)
	19965-20175-20385(LTE Band IV BW=3MHz)
	19975-20175-20375(LTE Band IV BW=5MHz)
	20000-20175-20350(LTE Band IV BW=10MHz)
	20025-20175-20325(LTE Band IV BW=15MHz)
	20050-20175-20300(LTE Band IV BW=20MHz)
	18607-18900-19193(LTE Band II BW=1.4MHz)
	18615-18900-19185(LTE Band II BW=3MHz)
	18625-18900-19175(LTE Band II BW=5MHz)
	18650-18900-19150(LTE Band II BW=10MHz)
	18675-18900-19125(LTE Band II BW=15MHz)
	18700-18900-19100(LTE Band II BW=20MHz)
	20775-21100-21425(LTE Band VII BW=5MHz)
	20800-21100-21400(LTE Band VII BW=10MHz)
	20825-21100-21375(LTE Band VII BW=15MHz)
	20850-21100-21350(LTE Band VII BW=20MHz)
	1-6-11 (WiFi 2.4G)
	802.11a/11n 20M:36-40-44-48-52-56-60-64-100-104-108-112-116-132-136-140-149-153-157-161-165(WiFi 5G)
	802.11n 40M:38-46-54-62-102-110-134-151-159(WiFi 5G)
	0-19-39-78(BT)

Table 3:Device information and operating configuration

Note : *5600MHz-5650MHz is notched.

1.3.1 General Description

HUAWEI MediaPad T1 8.0 Pro is a 8-inch tablet that incorporates a Qualcomm MSM8916 chip, and a quad-core at 1.2 GHz. With support for 4G and Wi-Fi data connections, MediaPad T1 8.0 Pro provides users with unprecedented access to high-speed Internet services.

Battery information:

Name	Manufacture	Serials number	Description
Li-ion Battery	Huawei Technologies Co.,Ltd.	NA	Battery Model: HB3080G1EBC Rated capacity: 4800 mAh Nominal Voltage:  +3.8V Charging Voltage:  +4.35V

1.4 Test specification(s)

ANSI Std C95.1-1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.(IEEE Std C95.1-1991)
IEEE Std 1528-2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE Std 1528a-2005	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 4 of March 2010)
KDB941225 D01	3G SAR Procedures v03
KDB941225 D05	SAR for LTE Devices v02r03
KDB648474 D04	Handsets SAR v01r02
KDB447498 D01	General RF Exposure Guidance v05r02
KDB248227 D01	SAR meas for 802.11 a/b/g v01r02
KDB616217 D04	SAR for laptop and tablets v01r01
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r03
KDB865664 D02	SAR Reporting v01r01
KDB690783 D01	SAR Listings on Grants v01r03

1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Zone K3,Huawei Industrial Base, Bantian Industry Area, Longgang District, Shenzhen, Guangdong, China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT #2174.01

1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.7 Application details


Start Date of test	2014-10-17
End Date of test	2014-11-05

1.8 Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2 SAR Measurement System

2.1 SAR Measurement Set-up

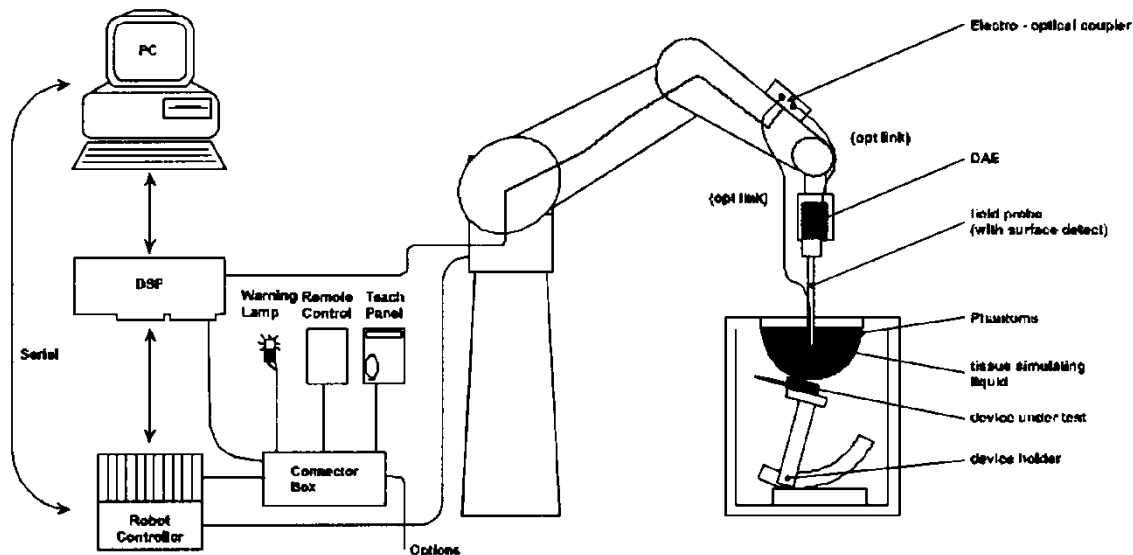

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

2.2 Test environment

The DASY5 measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.

The system allows the measurement of SAR values larger than 0.005 mW/g.

2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.


DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	


2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (± 2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

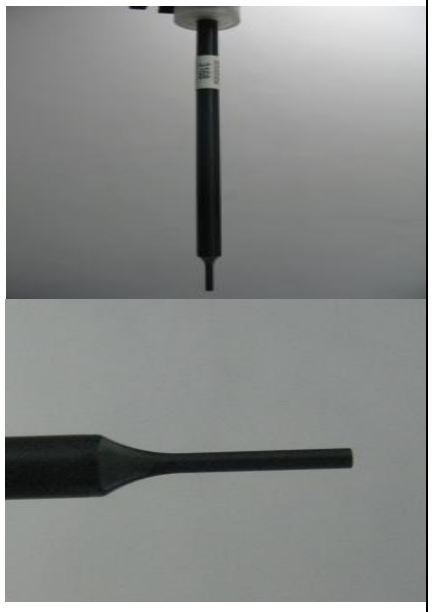Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

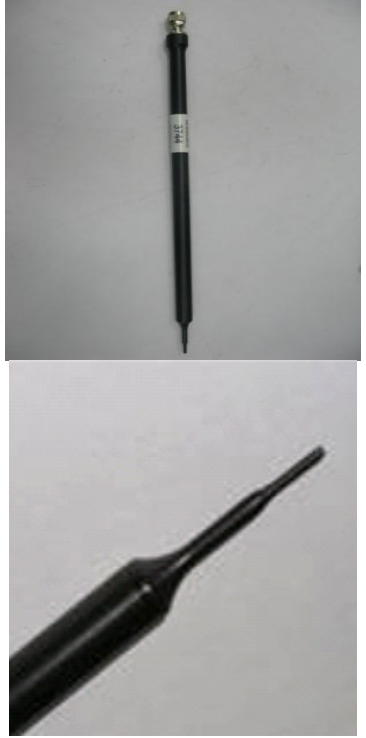
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	

2.5 Phantom description


SAM Twin Phantom

Shell Thickness	2mm +/- 0.2 mm; The ear region: 6mm	
Filling Volume	Approximately 25 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	
The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.		

The following figure shows the definition of reference point:

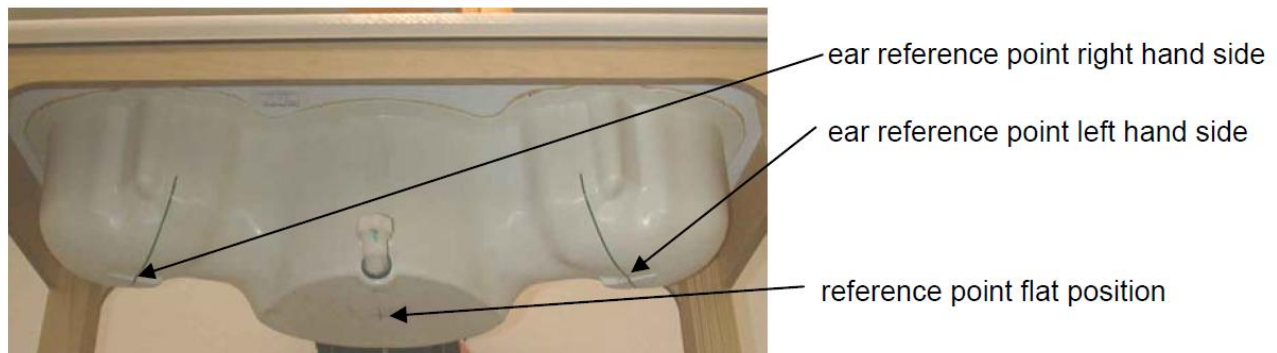

ELI4 Phantom

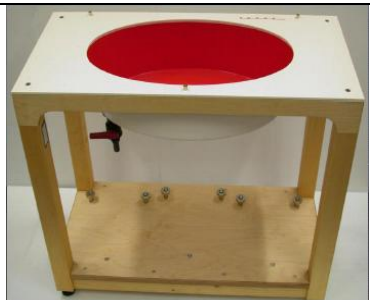ELI4 Phantom		
Shell Thickness	2mm +/- 0.2 mm	
Filling Volume	Approximately 30 liters	
Dimensions	Major axis:600mm; Minor axis:400mm;	
Measurement Areas	Flat phantom	
The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.		

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity $2 \leq \epsilon_r \leq 5$ at ≤ 3 GHz, $3 \leq \epsilon_r \leq 4$ at > 3 GHz and a loss tangent ≤ 0.05 .

2.6 Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\sigma = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The device holder permits the device to be positioned with a tolerance of $\pm 1^\circ$ in the tilt angle.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Device	Type	Serial number	Date of last calibration	Valid period
☐	SPEAG	Dosimetric E-Field Probe	EX3DV4	3736	2014-04-24	One year
☐	SPEAG	Dosimetric E-Field Probe	EX3DV4	3744	2014-07-24	One year
☒	SPEAG	Dosimetric E-Field Probe	EX3DV4	3898	2014-03-10	One year
☒	SPEAG	835 MHz Dipole	D835V2	4d059	2013-05-02	Three years
☒	SPEAG	1750 MHz Dipole	D1750V2	1123	2014-07-08	Three years
☒	SPEAG	1900 MHz Dipole	D1900V2	5d143	2014-09-23	Three years
☒	SPEAG	2450 MHz Dipole	D2450V2	860	2014-01-23	Three years
☒	SPEAG	2600 MHz Dipole	D2600V2	1021	2014-07-16	Three years
☒	SPEAG	5GHz Dipole	D5GHzV2	1155	2014-04-21	Three years
☒	SPEAG	Data acquisition electronics	DAE4	852	2014-04-30	One year
☒	SPEAG	Software	DASY 5	N/A	NCR	NCR
☐	SPEAG	Twin Phantom	SAM1	TP-1475	NCR	NCR
☐	SPEAG	Twin Phantom	SAM2	TP-1474	NCR	NCR
☒	SPEAG	Twin Phantom	SAM3	TP-1597	NCR	NCR
☒	SPEAG	Twin Phantom	SAM4	TP-1620	NCR	NCR
☐	SPEAG	Flat Phantom	ELI 4.0	TP-1038	NCR	NCR
☒	SPEAG	Flat Phantom	ELI 5.0	TP-1111	NCR	NCR
☒	R & S	Universal Radio Communication Tester	CMU 200	111379	2014-07-11	One year
☒	R & S	Universal Radio Communication Tester	CMW 500	126855	2014-07-11	One year
☒	Agilent	Network Analyser	E5071C	MY46213349	2014-02-25	One year
☒	Agilent	Dielectric Probe Kit	85070E	2484	NCR	NCR
☒	Agilent	Signal Generator	N5181A	MY47420989	2014-01-18	One year
☒	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1402001	NCR	NCR
☒	MINI-CIRCUITS	Amplifier	ZVE-8G+	129601322	NCR	NCR
☒	AR	Directional Coupler	DC7144M1	0423264	2014-04-02	One year
☒	R & S	Power Meter	NRP	100740	2014-07-11	One year
☒	R & S	Power Meter Sensor	NRP-Z11	106288	2014-07-11	One year
☒	Agilent	Power Meter	E4417A	MY45101339	2014-01-18	One year
☒	Agilent	Power Meter Sensor	E9321A	MY44420359	2014-01-18	One year

Note:

1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- There is no physical damage on the dipole;
- System check with specific dipole is within 10% of calibrated value;
- The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
- The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

3 SAR Measurement Procedure

3.1 Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$, 2-4GHz - $\leq 5\text{ mm}$ and 4-6 GHz- $\leq 4\text{mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$, 3-4 GHz- $\leq 4\text{mm}$ and 4-6GHz- $\leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximun Zoom Scan spatial resolution ($\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$)	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{\text{Zoom}}(n)$	$\Delta z_{\text{Zoom}}(1)^*$	$\Delta z_{\text{Zoom}}(n>1)^*$	
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	≤1.5* $\Delta z_{\text{Zoom}}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	≤1.5* $\Delta z_{\text{Zoom}}(n-1)$	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	≤1.5* $\Delta z_{\text{Zoom}}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	≤1.5* $\Delta z_{\text{Zoom}}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	≤1.5* $\Delta z_{\text{Zoom}}(n-1)$	≥22mm

3.2 Spatial Peak SAR Evaluations

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points(with 8mm horizontal resolution) or 7 x 7 x 7 points(with 5mm horizontal resolution) or 8 x 8 x 7 points(with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compansate boundary effects on E-field probes.

3.3 Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with	V _i	= compensated signal of channel i	(i = x, y, z)
	U _i	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field	(DASY parameter)
	dcp _i	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\begin{aligned} \text{E-field probes:} \quad E_i &= (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2} \\ \text{H-field probes:} \quad H_i &= (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f \end{aligned}$$

with V_i = compensated signal of channel i (i = x, y, z)
 Norm_i = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes
ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \quad \text{or} \quad P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

4 System Verification Procedure

4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Head Tissue					
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	39.2	41.45	52.64	55.242	62.7	55.242
Salt (NaCl)	2.7	1.45	0.36	0.306	0.5	0.306
Sugar	57.0	56.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	44.542	36.8	44.452
Ingredients (% of weight)	Body Tissue					
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	50.3	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M Ω + resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Simulating Head Liquid for 5G(HBBL3500-5800MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	50-65%
Mineral oil	10-30%
Emulsifiers	8-25%
Sodium salt	0-1.5%

Simulating Body Liquid for 5G (MBBL3500-5800MHz),Manufactured by SPEAG:

Ingredients	(% by weight)
Water	60-80%
Esters,Emulsifiers,Inhibitors	20-40%
Sodium salt	0-1.5%

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r (+/-5%)	σ (S/m) (+/-5%)	ϵ_r	σ (S/m)		
835H	825	41.60 (39.52~43.68)	0.90 (0.86~0.95)	40.05	0.873	21.4°C	2014-10-20
	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	39.95	0.884		
	850	41.50 (39.43~43.58)	0.92 (0.87~0.96)	39.78	0.900		
835B	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	53.68	0.943	21.4°C	2014-10-27
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	53.56	0.956		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	53.38	0.978		
1750H	1710	40.1 (38.10~42.11)	1.35 (1.28~1.42)	38.98	1.316	21.4°C	2014-10-21
	1730	40.1 (38.10~42.11)	1.36 (1.29~1.43)	38.88	1.344		
	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	38.79	1.370		
	1800	40.0 (38.00~42.00)	1.40 (1.33~1.47)	38.53	1.408		
1750B	1710	53.5 (50.83~56.18)	1.46 (1.39~1.53)	53.01	1.472	21.4°C	2014-10-28
	1730	53.5 (50.83~56.18)	1.48 (1.41~1.55)	53.01	1.488		
	1750	53.4 (50.73~56.07)	1.49 (1.42~1.56)	52.98	1.499		
	1800	53.3 (50.64~55.97)	1.52 (1.44~1.60)	50.74	1.527		
1900H	1850	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.15	1.343	21.4°C	2014-10-18
	1880	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.10	1.397		
	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.37	1.437		
	1910	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.48	1.450		
1900B	1850	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.76	1.485	21.4°C	2014-10-26
	1880	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.71	1.514		
	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.64	1.532		
	1910	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.60	1.541		

2450H	2410	39.30 (37.34~41.26)	1.76 (1.67~1.85)	39.83	1.765	21.4°C	2014-10-29
	2435	39.20 (37.24~41.16)	1.79 (1.70~1.88)	39.77	1.791		
	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	39.71	1.804		
	2460	39.20 (37.24~41.16)	1.81 (1.72~1.90)	39.67	1.812		
2450B	2410	52.80 (50.16~55.44)	1.91 (1.81~2.00)	50.47	1.930	21.4°C	2014-10-31
	2435	52.70 (50.07~55.34)	1.94 (1.84~2.04)	50.40	1.966		
	2450	52.70 (50.07~55.34)	1.95 (1.85~2.05)	50.35	1.988		
	2460	52.70 (50.07~55.34)	1.96 (1.86~2.06)	50.33	2.003		
2600H	2510	39.12 (37.16~41.01)	1.86 (1.77~1.96)	39.20	1.849	21.4°C	2014-10-17
	2535	39.1 (37.13~41.04)	1.89 (1.80~1.98)	39.12	1.876		
	2560	39 (37.05~40.95)	1.917 (1.82~2.01)	39.03	1.902		
	2600	39 (37.05~40.95)	1.96 (1.86~2.05)	38.89	1.948		
2600B	2510	52.62 (49.99~55.25)	2.03 (1.93~2.13)	50.92	2.112	21.4°C	2014-10-25
	2535	52.59 (49.96~55.22)	2.07 (1.97~2.17)	50.85	2.142		
	2560	52.57 (49.94~55.20)	2.09 (1.99~2.19)	50.78	2.168		
	2600	52.5 (49.88~55.13)	2.16 (2.05~2.27)	50.66	2.212		
5G Head	5200	36.0 (34.20~37.80)	4.66 (4.43~4.89)	37.52	4.567	21.6°C	2014-11-04
	5300	36.0 (34.20~37.80)	4.66 (4.43~4.89)	36.32	4.743	21.6°C	2014-11-04
	5600	35.5 (33.73~37.28)	5.07 (4.82~5.32)	35.88	4.921	21.6°C	2014-11-04
	5800	35.3 (33.54~37.07)	5.27 (5.01~5.53)	35.49	5.288	21.6°C	2014-11-04
5G Body	5200	49.0 (46.55~51.45)	5.30 (5.03~5.56)	50.97	5.194	21.6°C	2014-11-02
	5300	49.0 (46.55~51.45)	5.30 (5.03~5.56)	49.69	5.533	21.6°C	2014-11-03
	5600	48.5 (46.08~50.93)	5.77 (5.48~6.06)	49.57	5.612	21.6°C	2014-11-04
	5800	48.20 (45.79~50.61)	6.00 (5.70~6.30)	49.04	6.162	21.6°C	2014-11-04
ϵ_r = Relative permittivity, σ = Conductivity							

Table 5: Measured Tissue Parameter

Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

4.2 System Check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests(Graphic Plot(s) see Appendix A).


System Check	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)		
835MHz Head	9.49 (8.54~10.44)	6.18 (5.56~6.80)	9.20	5.96	21.4°C	2014-10-20
1750MHz Head	35.1 (31.59~38.61)	18.6 (16.74~20.46)	37.40	19.76	21.4°C	2014-10-21
1900MHz Head	40.80 (36.72~44.88)	21.40 (19.26~23.54)	39.28	20.72	21.4°C	2014-10-18
2450MHz Head	52.60 (47.34~57.86)	24.50 (22.05~26.95)	51.20	23.64	21.4°C	2014-10-29
2600MHz Head	58.6 (52.74~64.46)	26.2 (23.58~28.82)	61.20	27.36	21.4°C	2014-10-17
5200MHz Head	78.8 (70.92~86.68)	22.5 (20.25~24.75)	76.60	21.60	21.6°C	2014-11-04
5300MHz Head	83.9 (75.51~92.29)	23.9 (21.51~26.29)	84.50	23.60	21.6°C	2014-11-04
5600MHz Head	82.4 (74.16~90.64)	23.4 (21.06~25.74)	86.50	23.90	21.6°C	2014-11-04
5800MHz Head	79.5 (71.55~87.45)	22.5 (20.25~24.75)	78.00	21.70	21.6°C	2014-11-04
835MHz Body	9.42 (8.48~10.36)	6.19 (5.57~6.80)	9.60	6.32	21.4°C	2014-10-27
1750MHz Body	36.3 (32.67~39.93)	19.5 (17.55~21.45)	39.16	20.52	21.4°C	2014-10-28
1900MHz Body	40.20 (36.18~44.22)	21.30 (19.17~23.43)	40.40	21.36	21.4°C	2014-10-26
2450MHz Body	50.6 (45.54~55.66)	23.7 (21.33~26.07)	54.80	25.60	21.4°C	2014-10-31
2600MHz Body	57.6 (51.84~63.36)	25.5 (22.95~28.05)	61.60	26.76	21.4°C	2014-10-25
5200MHz Body	77.6 (69.84~85.36)	21.6 (19.44~23.76)	73.60	20.60	21.6°C	2014-11-02
5300MHz Body	78.5 (70.65~86.35)	22.0 (19.80~24.20)	77.20	21.30	21.6°C	2014-11-03
5600MHz Body	83.1 (74.79~91.41)	22.9 (20.61~25.19)	81.90	22.60	21.6°C	2014-11-04
5800MHz Body	76.7 (69.03~84.37)	21.2 (19.08~23.32)	74.50	20.60	21.6°C	2014-11-04

Table 6: System Check Results

4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW(below 5GHz) or 100mW(above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

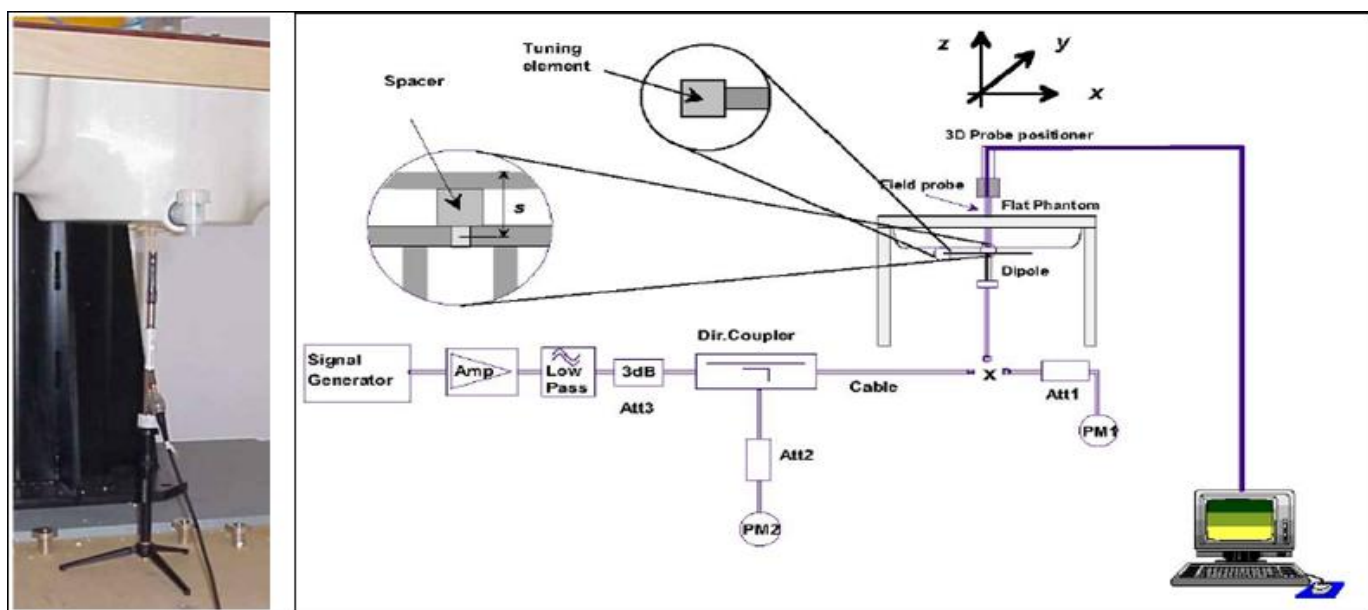

5 SAR measurement variability and uncertainty

5.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r03, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.

5.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2003 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6 SAR Test Configuration

6.1 GSM Test Configuration

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to “5” and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot.

The allowed power reduction in the multi-slot configuration is as following:

Number of timeslots in uplink assignment		Reduction of maximum output power (dB)		
Band	Time Slots	GPRS (GMSK)	EGPRS (GMSK)	EGPRS (8PSK)
GSM850	1 TX slot	0	0	0
	2 TX slots	2.5	2.5	1.5
	3 TX slots	4.5	4.5	4
	4 TX slots	5.5	5.5	5
GSM1900	1 TX slot	0	0	0
	2 TX slots	3	3	1.5
	3 TX slots	5	5	3.5
	4 TX slots	6	6	4.5

Table 7: The allowed power reduction in the multi-slot configuration of GSM

6.2 UMTS Test Configuration

1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) WCDMA

a. Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.

b. Body SAR Measurements

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode

3) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

Per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when ΔACK , $\Delta NACK$, $\Delta CQI = 8$. The variation of the β_c / β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test ¹	β_c ²	β_d ²	β_d (SF) ²	β_c / β_d ²	β_{hs} (1) ²	CM(dB)(2) ²	MPR (dB) ²
1 ²	2/15 ²	15/15 ²	64 ²	2/15 ²	4/15 ²	0.0 ²	0 ²
2 ²	12/15(3) ²	15/15(3) ²	64 ²	12/15(3) ²	24/15 ²	1.0 ²	0 ²
3 ²	15/15 ²	8/15 ²	64 ²	15/8 ²	30/15 ²	1.5 ²	0.5 ²
4 ²	15/15 ²	4/15 ²	64 ²	15/4 ²	30/15 ²	1.5 ²	0.5 ²

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs} / \beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
Note 2: CM=1 for $\beta_c / \beta_d = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.²
Note 3: For subtest 2 the β_c / β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$ ²

Table 8: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits

Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 9: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 10: HSDPA UE category

4) HSUPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

Per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the ‘WCDMA Handset’ and ‘Release 5 HSDPA Data Device’ sections of 3G device.

Sub-test ¹	β_c ²	β_d ²	β_d (SF) ³	β_c/β_d ⁴	$\beta_{hs}^{(1)}$ ⁵	β_{ec} ⁶	β_{ed} ⁷	β_{ec} (SF) ⁸	β_{ed} (code) ⁹	CM ⁽²⁾ ¹⁰ (dB) ¹¹	MP R ¹² (dB) ¹³	AG ⁽⁴⁾ ¹⁴ Index ¹⁵	E-TFC I ¹⁶
1 ¹⁷	11/15 ⁽³⁾	15/15 ⁽³⁾	64 ¹⁸	11/15 ⁽³⁾	22/15 ¹⁹	209/225 ²⁰	1039/225 ²¹	4 ²²	1 ²³	1.0 ²⁴	0.0 ²⁵	20 ²⁶	75 ²⁷
2 ²⁸	6/15 ²⁹	15/15 ³⁰	64 ³¹	6/15 ³²	12/15 ³³	12/15 ³⁴	94/75 ³⁵	4 ³⁶	1 ³⁷	3.0 ³⁸	2.0 ³⁹	12 ⁴⁰	67 ⁴¹
3 ⁴²	15/15 ⁴³	9/15 ⁴⁴	64 ⁴⁵	15/9 ⁴⁶	30/15 ⁴⁷	30/15 ⁴⁸	$\beta_{ed1}:47/15$ ⁴⁹ $\beta_{ed2}:47/15$ ⁵⁰	4 ⁵¹	2 ⁵²	2.0 ⁵³	1.0 ⁵⁴	15 ⁵⁵	92 ⁵⁶
4 ⁵⁷	2/15 ⁵⁸	15/15 ⁵⁹	64 ⁶⁰	2/15 ⁶¹	4/15 ⁶²	2/15 ⁶³	56/75 ⁶⁴	4 ⁶⁵	1 ⁶⁶	3.0 ⁶⁷	2.0 ⁶⁸	17 ⁶⁹	71 ⁷⁰
5 ⁷¹	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64 ⁷²	15/15 ⁽⁴⁾	30/15 ⁷³	24/15 ⁷⁴	134/15 ⁷⁵	4 ⁷⁶	1 ⁷⁷	1.0 ⁷⁸	0.0 ⁷⁹	21 ⁸⁰	81 ⁸¹
Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference¹ Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$¹ Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$¹ Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g¹ Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.¹													

Table 11:Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).

Table 12:HSUPA UE category

5) DC-HSDPA

In DC-HSDPA implementation of this device, the uplink parameters are the same as HSDPA. No additional channels and modulations (16 QAM, and 64 QAM) are supported in uplink. The difference is only in the downlink parameters, where two carriers are supported. HSDPA settings were used on uplink.

For Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/lor	dB	-10
P-CCPCH and SCH_Ec/lor	dB	-12
PICH_Ec/lor	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/lor	dB	-5
OCNS_Ec/lor	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 13: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

- 1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
- 2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

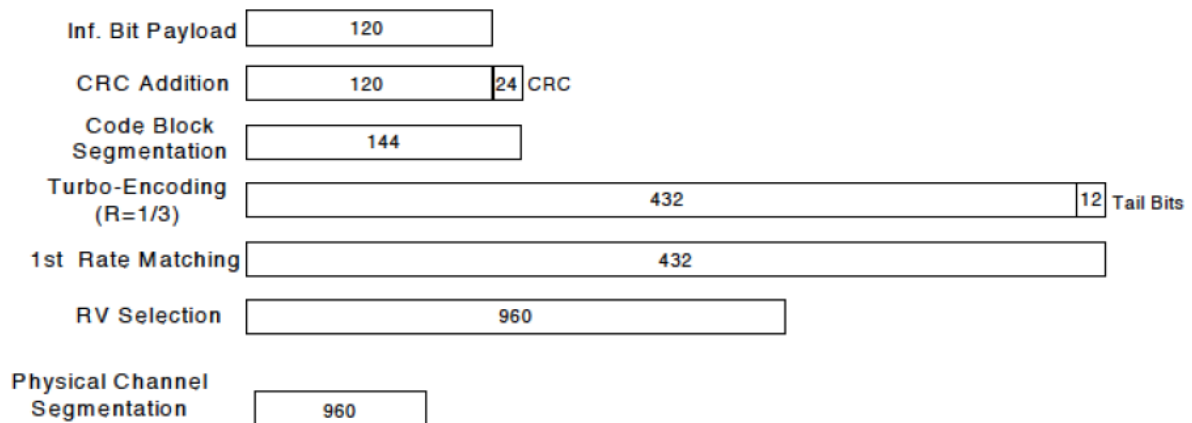


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c/β_d ^o	$\beta_{hs}(1)$ ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: Δ ACK, Δ NACK and Δ CQI=8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
Note 2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

Up commands are set continuously to set the UE to Max power.

Note:

- 1.The Dual Carriers transmission only applies to HSDPA physical channels
- 2.The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4.The Dual Carriers operate in the same frequency band .
- 5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
- 6.The device doesn't support carrier aggregation for it just can operate in Release 8.

6.3 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02r03. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames(Maximum TTI)

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101:

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The LTE Band IV MPR of the device is as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR
	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	0.8
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	1.8

The LTE Band II MPR of the device is as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR
	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	0.8
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	1.8

The LTE Band VII MPR of the device is as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]				MPR
	5	10	15	20	
	MHz	MHz	MHz	MHz	
QPSK	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 8	> 12	> 16	> 18	0.8
16 QAM	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 8	> 12	> 16	> 18	1.8

3) A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS_01" on the base station simulator.

4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

6.4 WiFi 2.4G Test Configuration

For the 802.11b/g SAR tests, a communication link is set up with the test mode software for WiFi mode test. The Absolute Radio Frequency Channel Number(ARFCN) is allocated to 1 ,6 and 11 respectively in the case of 2450 MHz.During the test,at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate.

802.11b/g operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g modes are tested on channel 1, 6, 11; however,if output power reduction is necessary for channels 1 and/or 11 to meet restricted band requirements the highest output channel closest to each of these channels must be tested instead.

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

Mode	Band	GHz	Channel	“Default Test Channels”	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1#	√	△
		2.437	6	√	△
		2.462	11#	√	△

Notes:

√ = “default test channels”

△= possible 802.11g channels with maximum average output ¼ dB the “default test channels”

= when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

802.11 Test Channels per FCC KDB 248227

6.5 WiFi 5G Test Configuration

For the 802.11a SAR tests, a communication link is set up with the test mode software for WiFi mode test. 802.11a operating modes are tested independently according to the service requirements in each 5G WiFi frequency band. During the test,at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate.

Per KDB248227,for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate. When 802.11n-HT20 and 11n-HT40 output power is less than 0.25dB higher than 802.11a, the SAR can be excluded.

7 SAR Measurement Results

7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200&CMW500 was used. SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

Note: CMU200 measures GSM peak and average output power for active timeslots. For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
timebased avg. power compared to slotted avg. power	-9.19dB	-6.13dB	-4.42dB	-3.18dB

The signalling modes differ as follows:

mode	coding scheme	modulation
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

7.1.1 Conducted power measurements of GSM850

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	128CH	190CH	251CH		Tune-up	128CH	190CH	251CH
GSM (CS)		33.50	31.70	31.69	31.59	-9.19	24.31	22.51	22.50	22.40
GPRS/EDGE (GMSK)	1 Tx Slot	33.50	31.69	31.66	31.55	-9.19	24.31	22.50	22.47	22.36
	2 Tx Slots	31.00	29.65	29.66	29.56	-6.13	24.87	23.52	23.53	23.43
	3 Tx Slots	29.00	27.57	27.70	27.73	-4.42	24.58	23.15	23.28	23.31
	4 Tx Slots	28.00	26.63	26.32	26.27	-3.18	24.82	23.45	23.14	23.09
EDGE (8PSK)	1 Tx Slot	28.00	26.24	26.17	26.11	-9.19	18.81	17.05	16.98	16.92
	2 Tx Slots	26.50	26.09	26.11	26.05	-6.13	20.37	19.96	19.98	19.92
	3 Tx Slots	24.00	23.46	23.42	23.37	-4.42	19.58	19.04	19.00	18.95
	4 Tx Slots	23.00	22.28	22.25	22.24	-3.18	19.82	19.10	19.07	19.06

Table 14:Conducted power measurement results of GSM850

Note:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

7.1.2 Conducted power measurements of GSM1900

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
GSM (CS)		30.50	29.08	28.86	28.71	-9.19	21.31	19.89	19.67	19.52
GPRS/EDGE (GMSK)	1 Tx Slot	30.50	29.05	28.83	28.68	-9.19	21.31	19.86	19.64	19.49
	2 Tx Slots	27.50	26.12	25.87	25.90	-6.13	21.37	19.99	19.74	19.77
	3 Tx Slots	25.50	23.84	23.66	23.85	-4.42	21.08	19.42	19.24	19.43
	4 Tx Slots	24.50	22.81	22.66	22.80	-3.18	21.32	19.63	19.48	19.62
EDGE (8PSK)	1 Tx Slot	26.50	24.77	24.65	24.66	-9.19	17.31	15.58	15.46	15.47
	2 Tx Slots	25.00	24.59	24.62	24.62	-6.13	18.87	18.46	18.49	18.49
	3 Tx Slots	23.00	21.86	21.83	21.82	-4.42	18.58	17.44	17.41	17.40
	4 Tx Slots	22.00	20.75	20.74	20.72	-3.18	18.82	17.57	17.56	17.54

Table 15: Conducted power measurement results of GSM1900

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested

7.1.3 Conducted power measurements of UMTS Band V

UMTS Band V		Tune-up	Conducted Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	24.00	22.37	22.41	22.52
	64kbps RMC	24.00	22.35	22.29	22.58
	144kbps RMC	24.00	22.36	22.27	22.54
	384kbps RMC	24.00	22.37	22.25	22.62
HSDPA	Subtest 1	23.00	21.20	21.36	21.49
	Subtest 2	22.50	21.11	21.18	21.41
	Subtest 3	22.00	20.51	20.69	21.00
	Subtest 4	22.00	20.42	20.69	20.74
HSUPA	Subtest 1	23.00	20.70	20.35	20.23
	Subtest 2	23.00	19.96	19.60	19.48
	Subtest 3	21.20	19.95	19.55	19.44
	Subtest 4	22.00	20.26	19.93	19.81
	Subtest 5	23.00	20.57	20.21	20.10
DC-HSDPA	Subtest 1	23.00	21.22	21.37	21.54
	Subtest 2	22.50	21.10	21.19	21.48
	Subtest 3	22.00	20.48	20.71	21.02
	Subtest 4	22.00	20.45	20.72	20.72

Table 16: Conducted power measurement results of UMTS Band V

Note:

- 1) The conducted power of UMTS Band V is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

7.1.4 Conducted power measurements of UMTS Band IV

UMTS Band IV		Tune-up	Conducted Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	24.00	22.95	23.06	22.83
	64kbps RMC	24.00	23.01	23.11	22.83
	144kbps RMC	24.00	22.97	23.08	22.89
	384kbps RMC	24.00	22.93	23.15	22.87
HSDPA	Subtest 1	23.00	21.83	22.09	21.81
	Subtest 2	22.50	21.87	21.98	21.67
	Subtest 3	22.00	21.29	21.43	21.02
	Subtest 4	22.00	21.31	21.40	21.05
HSUPA	Subtest 1	23.00	21.75	21.85	21.43
	Subtest 2	23.00	20.76	21.07	20.68
	Subtest 3	21.20	20.04	21.01	20.64
	Subtest 4	22.00	20.91	21.23	20.83
	Subtest 5	23.00	21.55	21.60	21.20
DC-HSDPA	Subtest 1	23.00	21.81	22.05	21.85
	Subtest 2	22.50	21.89	21.99	21.61
	Subtest 3	22.00	21.25	21.48	21.05
	Subtest 4	22.00	21.33	21.38	21.01

Table 17: Conducted power measurement results of UMTS Band IV

Note:

1) The conducted power of UMTS Band IV is measured with RMS detector.

Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode .

7.1.5 Conducted power measurements of UMTS Band II

UMTS Band IV		Tune-up	Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	24.00	22.37	22.41	22.52
	64kbps RMC	24.00	22.35	22.29	22.58
	144kbps RMC	24.00	22.36	22.27	22.54
	384kbps RMC	24.00	22.37	22.25	22.62
HSDPA	Subtest 1	23.00	21.20	21.36	21.49
	Subtest 2	22.50	21.11	21.18	21.41
	Subtest 3	22.00	20.51	20.69	21.00
	Subtest 4	22.00	20.42	20.69	20.74
HSUPA	Subtest 1	23.00	20.70	20.35	20.23
	Subtest 2	23.00	19.96	19.60	19.48
	Subtest 3	21.20	19.95	19.55	19.44
	Subtest 4	22.00	20.26	19.93	19.81
	Subtest 5	23.00	20.57	20.21	20.10
DC-HSDPA	Subtest 1	23.00	21.22	21.37	21.54
	Subtest 2	22.50	21.10	21.19	21.48
	Subtest 3	22.00	20.48	20.71	21.02
	Subtest 4	22.00	20.45	20.72	20.72

Table 18: Conducted power measurement results of UMTS Band II

Note:

2) The conducted power of UMTS Band II is measured with RMS detector.

Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode .

7.1.6 Conducted power measurements of LTE Band IV

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19957	20175	20393
1.4MHz	QPSK	1	0	23.50	21.98	22.05	21.76
		1	3	23.50	21.95	22.09	21.86
		1	5	23.50	22.04	22.12	21.83
		3	0	23.50	21.97	22.08	21.81
		3	2	23.50	21.95	22.12	21.93
		3	3	23.50	21.97	22.10	21.93
		6	0	22.70	21.02	21.17	20.96
	16QAM	1	0	22.50	21.04	21.11	20.72
		1	3	22.50	21.28	21.22	20.69
		1	5	22.50	21.32	21.23	20.75
		3	0	22.50	20.93	21.27	20.92
		3	2	22.50	21.08	21.27	20.96
		3	3	22.50	21.09	21.28	20.92
		6	0	21.70	20.21	20.31	19.96
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19965	20175	20385
3MHz	QPSK	1	0	23.50	21.77	22.03	21.83
		1	7	23.50	21.95	21.99	21.78
		1	14	23.50	22.03	22.08	21.82
		8	0	22.70	20.98	21.13	20.89
		8	4	22.70	20.93	21.13	20.84
		8	7	22.70	21.01	21.21	20.81
		15	0	22.70	20.97	21.12	20.90
	16QAM	1	0	22.50	21.08	21.34	20.74
		1	7	22.50	21.57	21.31	20.73
		1	14	22.50	21.66	21.31	20.78
		8	0	21.70	20.03	20.14	20.10
		8	4	21.70	20.16	20.22	19.97
		8	7	21.70	20.13	20.22	19.99
		15	0	21.70	20.08	20.20	20.00

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19975	20175	20375
5MHz	QPSK	1	0	23.50	21.59	22.02	22.03
		1	13	23.50	22.00	22.05	21.88
		1	24	23.50	22.03	22.12	21.87
		12	0	22.70	21.02	21.21	20.91
		12	6	22.70	20.98	21.11	20.84
		12	13	22.70	21.05	21.15	20.88
		25	0	22.70	20.94	21.17	20.87
	16QAM	1	0	22.50	20.75	20.99	20.81
		1	13	22.50	20.96	20.95	20.69
		1	24	22.50	20.93	21.07	20.75
		12	0	21.70	20.15	20.19	19.95
		12	6	21.70	20.12	20.20	19.89
		12	13	21.70	20.18	20.18	19.88
		25	0	21.70	19.98	20.10	19.94
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20000	20175	20350
10MHz	QPSK	1	0	23.50	21.57	22.02	21.95
		1	25	23.50	21.98	22.02	21.89
		1	49	23.50	21.94	22.06	21.85
		25	0	22.70	20.93	21.15	21.03
		25	13	22.70	21.04	21.12	20.91
		25	25	22.70	21.08	21.06	20.87
		50	0	22.70	20.95	21.09	20.88
	16QAM	1	0	22.50	20.53	21.27	21.31
		1	25	22.50	21.15	21.31	20.74
		1	49	22.50	21.19	21.32	20.63
		25	0	21.70	19.92	20.03	20.05
		25	13	21.70	19.95	20.02	19.92
		25	25	21.70	19.97	20.00	19.85
		50	0	21.70	19.99	20.05	20.08

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20025	20175	20325
15MHz	QPSK	1	0	23.50	21.54	22.02	21.94
		1	38	23.50	21.94	22.05	21.99
		1	74	23.50	22.00	21.80	21.85
		36	0	22.70	20.99	21.01	20.92
		36	18	22.70	20.93	21.05	21.04
		36	39	22.70	20.99	21.00	20.85
		75	0	22.70	20.89	21.03	20.81
	16QAM	1	0	22.50	20.60	21.33	21.07
		1	38	22.50	21.25	21.29	20.88
		1	74	22.50	21.21	21.19	20.68
		36	0	21.70	20.05	19.98	19.96
		36	18	21.70	20.01	20.10	19.98
		36	39	21.70	19.98	20.05	19.85
		75	0	21.70	19.86	19.97	19.84
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20050	20175	20300
20MHz	QPSK	1	0	23.50	21.54	22.13	21.52
		1	50	23.50	22.13	22.24	22.23
		1	99	23.50	21.92	21.52	21.82
		50	0	22.70	20.83	20.95	21.03
		50	25	22.70	21.07	21.16	20.94
		50	50	22.70	20.97	20.93	20.93
		100	0	22.70	20.95	21.02	20.91
	16QAM	1	0	22.50	20.55	21.78	20.69
		1	50	22.50	21.29	21.33	22.11
		1	99	22.50	21.38	20.99	21.09
		50	0	21.70	19.89	19.87	20.04
		50	25	21.70	20.01	20.03	20.01
		50	50	21.70	19.92	19.97	20.02
		100	0	21.70	20.00	19.97	20.02

Table 19: Conducted power measurement results of LTE Band IV

7.1.7 Conducted power measurements of LTE Band II

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18607	18900	19193
1.4MHz	QPSK	1	0	23.50	21.81	22.04	21.89
		1	3	23.50	21.82	21.96	21.95
		1	5	23.50	21.79	22.05	21.69
		3	0	23.50	21.78	21.97	21.95
		3	2	23.50	21.76	21.97	21.88
		3	3	23.50	21.76	22.00	21.74
		6	0	22.70	20.93	21.03	21.06
	16QAM	1	0	22.50	20.85	21.10	21.28
		1	3	22.50	20.89	21.08	21.05
		1	5	22.50	20.86	21.09	20.82
		3	0	22.50	20.95	21.12	21.03
		3	2	22.50	20.91	21.09	20.89
		3	3	22.50	20.91	21.13	20.74
		6	0	21.70	20.15	20.18	20.83
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18615	18900	19185
3MHz	QPSK	1	0	23.50	21.73	21.84	21.81
		1	7	23.50	21.69	21.91	21.97
		1	14	23.50	21.77	22.04	21.55
		8	0	22.70	20.88	21.01	21.01
		8	4	22.70	20.90	20.99	21.03
		8	7	22.70	20.93	20.95	21.05
		15	0	22.70	20.87	20.99	21.10
	16QAM	1	0	22.50	20.96	21.19	20.87
		1	7	22.50	20.97	21.21	20.85
		1	14	22.50	21.03	21.29	20.79
		8	0	21.70	20.08	20.07	20.20
		8	4	21.70	20.05	20.04	20.24
		8	7	21.70	20.07	20.06	20.15
		15	0	21.70	20.05	20.06	20.22

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18615	18900	19185
5MHz	QPSK	1	0	23.50	21.70	21.85	21.95
		1	13	23.50	21.78	21.92	22.02
		1	24	23.50	21.85	22.01	21.52
		12	0	22.70	20.90	20.90	21.05
		12	6	22.70	20.90	21.00	20.93
		12	13	22.70	20.92	20.94	21.06
		25	0	22.70	20.90	20.99	20.88
	16QAM	1	0	22.50	20.71	20.91	20.90
		1	13	22.50	20.73	20.76	20.81
		1	24	22.50	20.83	20.99	20.80
		12	0	21.70	20.05	20.01	20.09
		12	6	21.70	20.06	20.05	20.03
		12	13	21.70	20.02	20.04	20.14
		25	0	21.70	19.96	19.94	20.02
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18650	18900	19150
10MHz	QPSK	1	0	23.50	21.71	21.95	21.96
		1	25	23.50	21.83	21.90	21.94
		1	49	23.50	21.90	22.14	21.51
		25	0	22.70	20.92	20.94	21.16
		25	13	22.70	20.99	21.01	21.08
		25	25	22.70	20.94	21.03	20.91
		50	0	22.70	20.93	20.92	20.93
	16QAM	1	0	22.50	21.02	21.16	21.03
		1	25	22.50	21.09	21.23	20.88
		1	49	22.50	21.12	21.41	20.53
		25	0	21.70	19.93	19.88	20.20
		25	13	21.70	19.97	19.95	20.15
		25	25	21.70	19.93	19.99	19.99
		50	0	21.70	19.99	19.97	20.02

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18675	18900	19125
15MHz	QPSK	1	0	23.50	21.72	21.95	22.28
		1	38	23.50	21.85	21.92	22.06
		1	74	23.50	21.85	22.18	21.53
		36	0	22.70	20.96	20.81	21.13
		36	18	22.70	20.97	20.98	21.16
		36	39	22.70	20.92	21.02	21.06
		75	0	22.70	20.81	20.83	21.01
	16QAM	1	0	22.50	20.93	21.09	21.18
		1	38	22.50	21.15	21.17	20.94
		1	74	22.50	20.83	21.45	20.52
		36	0	21.70	20.06	19.92	20.16
		36	18	21.70	20.08	19.98	20.12
		36	39	21.70	20.04	20.05	20.04
		75	0	21.70	19.86	19.83	20.08
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18700	18900	19100
20MHz	QPSK	1	0	23.50	21.72	21.91	22.24
		1	50	23.50	21.93	21.98	22.16
		1	99	23.50	21.87	22.34	21.52
		50	0	22.70	20.82	20.85	21.13
		50	25	22.70	20.89	20.87	21.14
		50	50	22.70	20.82	20.94	20.98
		100	0	22.70	20.80	20.93	21.10
	16QAM	1	0	22.50	20.83	21.15	21.55
		1	50	22.50	21.28	21.18	21.43
		1	99	22.50	21.24	21.45	20.55
		50	0	21.70	19.99	19.91	20.11
		50	25	21.70	20.10	19.93	20.19
		50	50	21.70	19.99	20.00	20.05
		100	0	21.70	19.93	19.97	20.12

Table 20: Conducted power measurement results of LTE Band II

7.1.8 Conducted power measurements of LTE Band VII

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775	21100	21425
5MHz	QPSK	1	0	23.50	22.06	21.89	21.87
		1	13	23.50	22.11	21.82	21.90
		1	24	23.50	22.22	21.85	22.08
		12	0	22.70	21.23	20.97	20.97
		12	6	22.70	21.18	21.03	20.94
		12	13	22.70	21.23	20.98	20.99
		25	0	22.70	21.16	20.98	20.95
	16QAM	1	0	22.50	20.71	20.51	21.23
		1	13	22.50	20.68	20.53	21.26
		1	24	22.50	20.86	20.54	21.43
		12	0	21.70	20.21	19.90	19.92
		12	6	21.70	20.21	19.89	19.92
		12	13	21.70	20.27	19.89	19.99
		25	0	21.70	20.23	19.95	19.78
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800	21100	21400
10MHz	QPSK	1	0	23.50	22.18	21.80	21.79
		1	25	23.50	22.28	21.87	21.79
		1	49	23.50	22.35	21.88	21.93
		25	0	22.70	21.19	21.01	20.78
		25	13	22.70	21.25	20.94	20.89
		25	25	22.70	21.28	20.90	20.92
		50	0	22.70	21.18	20.88	20.84
	16QAM	1	0	22.50	20.71	20.63	20.53
		1	25	22.50	20.91	20.50	20.52
		1	49	22.50	20.97	20.51	20.54
		25	0	21.70	20.24	19.98	19.83
		25	13	21.70	20.35	19.90	19.86
		25	25	21.70	20.29	19.82	19.96
		50	0	21.70	20.27	19.84	19.89

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825	21100	21375
15MHz	QPSK	1	0	23.50	22.19	21.93	21.84
		1	38	23.50	22.31	21.86	21.96
		1	74	23.50	22.27	21.88	22.06
		36	0	22.70	21.18	20.92	20.81
		36	18	22.70	21.23	20.89	20.86
		36	39	22.70	21.25	20.89	20.88
		75	0	22.70	21.14	20.86	20.71
	16QAM	1	0	22.50	20.81	20.54	20.76
		1	38	22.50	20.90	20.51	20.91
		1	74	22.50	20.94	20.59	20.98
		36	0	21.70	20.20	19.97	19.73
		36	18	21.70	20.19	19.87	19.76
		36	39	21.70	20.22	19.86	19.81
		75	0	21.70	20.14	19.77	19.70
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850	21100	21350
20MHz	QPSK	1	0	23.50	22.24	22.20	21.85
		1	50	23.50	22.31	21.93	21.91
		1	99	23.50	22.16	21.89	22.03
		50	0	22.70	21.23	20.92	20.74
		50	25	22.70	21.20	20.90	20.82
		50	50	22.70	21.22	20.78	20.78
		100	0	22.70	21.13	20.83	20.76
	16QAM	1	0	22.50	21.31	21.08	20.88
		1	50	22.50	21.32	20.99	21.03
		1	99	22.50	21.14	20.90	21.19
		50	0	21.70	20.20	19.85	19.71
		50	25	21.70	20.15	19.78	19.76
		50	50	21.70	20.11	19.71	19.76
		100	0	21.70	20.11	19.82	19.70

Table 21: Conducted power measurement results of LTE Band VII

7.1.9 Conducted power measurements of WiFi 2.4G

The output power of WiFi antenna is as following:

Wi-Fi 2450MHz	Channel	Tune- up	Average Power (dBm) for Data Rates (Mbps)							
			1	2	5.5	11	/	/	/	/
802.11b	1	13.00	12.48	12.44	12.35	11.91	/	/	/	/
	6	13.00	12.55	12.56	12.38	11.96	/	/	/	/
	11	13.00	12.35	12.32	12.30	11.76	/	/	/	/
Wi-Fi 2450MHz	Channel	Tune- up	6	9	12	18	24	36	48	54
802.11g	1	13.00	12.04	11.96	11.88	11.25	10.96	10.42	9.56	9.33
	6	13.00	11.92	11.79	11.75	11.14	10.85	10.23	9.42	9.22
	11	13.00	11.85	11.75	11.73	11.08	10.75	10.20	9.48	9.12
Wi-Fi 2450MHz	Channel	Tune- up	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n 20M	1	13.00	11.95	11.85	11.25	10.84	10.28	9.56	9.32	9.22
	6	13.00	11.87	11.73	11.15	10.77	10.24	9.48	9.28	9.15
	11	13.00	11.81	11.71	11.10	10.79	10.19	9.43	9.21	9.14

Table 22: Conducted power measurement results of WiFi 2.4G.

Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) The bolded mode was selected for SAR testing.
- 3) Per KDB248227, for WiFi 2.4GHz, highest average RF output power channel for the lowest data rate of 802.11b mode was selected for SAR evaluation. SAR test at higher data rates and higher order modulations (including 802.11g/n) were not required since the maximum average output power for each of these configurations is not more than 1/4dB higher than the tested channel for the lowest data rate of 802.11b mode.

7.1.10 Conducted power measurements of WiFi 5G

Mode	Channel	Frequency (MHz)	Tune-up	Average Power (dBm)							
				Data Rate (bps)							
				6M	9M	12M	18M	24M	36M	48M	54M
802.11a	CH 36	5180	12.00	9.92	9.24	9.27	8.69	8.46	7.94	7.01	6.71
	CH 40	5200	12.00	10.12	9.35	9.29	8.63	8.37	7.77	6.89	6.55
	CH 44	5220	12.00	10.28	9.54	9.54	8.91	8.67	8.10	7.23	7.00
	CH 48	5240	12.00	10.62	9.97	9.99	9.37	9.24	8.65	7.75	7.55
	CH 52	5260	12.00	10.83	10.14	10.15	9.52	9.37	8.74	7.90	7.69
	CH 56	5280	12.00	11.08	10.35	10.30	9.69	9.57	9.00	8.10	7.86
	CH 60	5300	12.00	11.32	10.58	10.54	9.87	9.65	9.11	8.22	7.98
	CH 64	5320	12.00	11.56	10.92	10.87	10.31	10.15	9.64	8.80	8.48
	CH 100	5500	10.00	8.43	7.75	7.74	7.17	7.00	6.46	5.66	5.43
	CH 104	5520	10.00	8.39	7.64	7.62	7.01	6.82	6.30	5.41	5.10
	CH 108	5540	10.00	8.04	7.29	7.23	6.55	6.42	5.82	4.91	4.57
	CH 112	5560	10.00	8.17	7.43	7.34	6.76	6.53	6.00	5.12	4.88
	CH 116	5580	10.00	8.13	7.45	7.42	6.73	6.50	5.97	5.09	4.80
	CH 132	5660	10.00	9.57	8.91	8.95	8.33	8.13	7.59	6.77	6.46
	CH 136	5680	10.00	9.56	8.84	8.79	8.14	8.01	7.50	6.62	6.38
	CH 140	5700	10.00	9.78	9.09	8.99	8.37	8.11	7.61	6.69	6.48
	CH 149	5745	10.50	9.63	9.00	8.91	8.32	8.20	7.62	6.79	6.46
	CH 153	5765	10.50	9.60	8.85	8.79	8.13	7.91	7.35	6.42	6.14
	CH 157	5785	10.50	9.53	8.89	8.88	8.27	8.04	7.50	6.70	6.47
	CH 161	5805	10.50	9.45	8.79	8.80	8.25	8.05	7.53	6.61	6.31
	CH 165	5825	10.50	9.15	8.39	8.42	7.79	7.65	7.11	6.19	5.94

Mode	Channel	Frequency (MHz)	Average Power (dBm)								
			Tune-up	Data Rate (bps)							
				MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
802.11n-HT20	CH 36	5180	12.00	9.79	9.16	9.08	8.42	8.25	7.69	6.80	6.48
	CH 40	5200	12.00	10.29	9.62	9.64	9.09	8.88	8.24	7.41	7.09
	CH 44	5220	12.00	10.21	9.55	9.58	8.95	8.79	8.25	7.38	7.10
	CH 48	5240	12.00	10.67	9.90	9.90	9.27	9.01	8.43	7.51	7.28
	CH 52	5260	12.00	10.75	10.07	10.03	9.38	9.24	8.67	7.75	7.47
	CH 56	5280	12.00	10.93	10.20	10.15	9.56	9.35	8.81	7.87	7.64
	CH 60	5300	12.00	11.18	10.43	10.46	9.91	9.72	9.14	8.20	7.93
	CH 64	5320	12.00	11.32	10.64	10.59	10.01	9.78	9.20	8.26	7.94
	CH 100	5500	10.00	8.13	7.37	7.32	6.64	6.42	5.82	4.89	4.63
	CH 104	5520	10.00	8.37	7.74	7.70	7.07	6.93	6.43	5.58	5.25
	CH 108	5540	10.00	8.16	7.48	7.44	6.87	6.70	6.19	5.25	4.98
	CH 112	5560	10.00	8.31	7.56	7.53	6.97	6.75	6.11	5.22	4.90
	CH 116	5580	10.00	8.11	7.45	7.37	6.73	6.49	5.91	5.00	4.72
	CH 132	5660	10.00	9.18	8.52	8.55	7.97	7.71	7.15	6.33	6.01
	CH 136	5680	10.00	9.65	8.89	8.84	8.18	8.00	7.49	6.69	6.42
	CH 140	5700	10.00	9.81	9.11	9.13	8.54	8.39	7.78	6.98	6.71
	CH 149	5745	10.50	9.48	8.76	8.67	8.00	7.88	7.34	6.53	6.26
	CH 153	5765	10.50	9.55	8.90	8.81	8.25	8.08	7.54	6.71	6.40
	CH 157	5785	10.50	9.13	8.39	8.38	7.78	7.52	6.93	6.00	5.73
	CH 161	5805	10.50	8.97	8.29	8.31	7.69	7.44	6.86	6.03	5.75
	CH 165	5825	10.50	8.98	8.23	8.15	7.58	7.33	6.81	5.89	5.65
Mode	Channel	Frequency (MHz)	Average Power (dBm)								
			Tune-up	Data Rate (bps)							
				MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
802.11n-HT40	CH 38	5190	12.00	7.05	6.42	6.44	5.80	5.63	5.04	4.18	3.97
	CH 46	5230	12.00	7.67	6.95	6.87	6.21	5.97	5.35	4.55	4.23
	CH 54	5270	12.00	8.33	7.69	7.59	6.95	6.81	6.26	5.46	5.25
	CH 62	5310	12.00	8.71	8.05	8.08	7.46	7.31	6.77	5.88	5.55
	CH 102	5510	10.00	6.95	6.25	6.27	5.64	5.45	4.83	3.89	3.60
	CH 110	5550	10.00	6.71	6.02	6.01	5.34	5.18	4.65	3.71	3.44
	CH 134	5670	10.00	7.78	7.10	7.10	6.55	6.38	5.77	4.95	4.67
	CH 151	5755	10.50	8.05	7.40	7.38	6.76	6.52	5.90	5.09	4.81
	CH 159	5795	10.50	7.63	6.97	6.94	6.28	6.08	5.51	4.59	4.34

Table 23: Conducted power measurement results of WiFi 5G.

Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) Per KDB248227D01v01r02 and October 2012/April 2013 FCC/TCB workshop meeting notes:for WiFi 5GHz, highest average RF output power channel for the lowest data rate of 802.11a mode was selected for SAR evaluation. SAR test at higher data rates and higher order modulations (including 802.11n 20MHz and 40MHz) were not required since the maximum average output power for each of these configurations is not more than 1/4dB higher than the tested channel for the lowest data rate of 802.11a mode..

7.1.11 Conducted power measurements of BT

The output power of BT antenna is as following:

BT 2450	Average Conducted Power (dBm)			
	Tune-up	0CH	39CH	78CH
DH5	9.50	7.88	8.90	7.12
2DH5	9.50	4.83	5.46	4.29
3DH5	9.50	5.49	6.13	4.79

BT 2450	Average Conducted Power (dBm)			
	Tune-up	0CH	19CH	39CH
BT(4.0)	9.50	4.75	6.60	5.50

Table 24: Conducted power measurement results of BT.

Note: The conducted power of BT is measured with RMS detector.

7.2 SAR measurement Results

General Notes:

- 1) The maximum reported SAR of each test band is shown in **bold** letters.
- 2) Per KDB447498 D01v05r02, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 3) Per KDB447498 D01v05r02, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 4) Per KDB 865664 D01v01, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/Kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/Kg, only one repeated measurement is required.
- 5) Per KDB865664 D02v01r01, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for details).
- 6) Per KDB648474 D04v01r02, SAR is evaluated without a headset connected to the device. When the standalone reported Body-Worn SAR is ≤ 1.2 W/kg, no additional SAR evaluations using a headset are required.

GSM Notes:

- 1) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

UMTS Notes:

- 1) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

LTE notes:

- 1) The LTE test configurations are determined according to KDB941225 D05 SAR for LTE Devices v02r03. The general test procedures used for SAR testing can be found in Section 6.3.
- 2) A-MPR was disabled for all SAR test by setting NS_01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI)

WLAN Notes:

Per KDB248227D01v01r02 and October 2012/April 2013 FCC/TCB workshop meeting notes:

- 1) For WiFi 2.4GHz, highest average RF output power channel for the lowest data rate of 802.11b mode was selected for SAR evaluation. SAR test at higher data rates and higher order modulations (including 802.11g/n) were not required since the maximum average output power for each of these configurations is not more than 1/4dB higher than the tested channel for the lowest data rate of 802.11b mode.
- 2) For WiFi 5GHz, highest average RF output power channel for the lowest data rate of 802.11a mode was selected for SAR evaluation. SAR test at higher data rates and higher order modulations (including 802.11n 20MHz and 40MHz) were not required since the maximum average output power for each of these configurations is not more than 1/4dB higher than the tested channel for the lowest data rate of 802.11a mode.

7.2.1 SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Left Hand Touched	190/836.6	GSM	0.210	0.124	0.040	31.69	33.50	0.319	21.4°C
Left Hand Tilted 15°	190/836.6	GSM	0.200	0.119	0.050	31.69	33.50	0.303	21.4°C
Right Hand Touched	190/836.6	GSM	0.379	0.199	-0.140	31.69	33.50	0.575	21.4°C
Right Hand Touched	128/824.2	GSM	0.329	0.171	-0.040	31.70	33.50	0.498	21.4°C
Right Hand Touched	251/848.8	GSM	0.351	0.182	0.010	31.59	33.50	0.545	21.4°C
Right Hand Tilted 15°	190/836.6	GSM	0.295	0.156	-0.040	31.69	33.50	0.448	21.4°C

Table 25: Head SAR test results of GSM850

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Back Side	190/836.6	GPRS 2TS	0.897	0.518	0.190	29.66	31.00	1.221	21.4°C
Back Side	128/824.2	GPRS 2TS	0.955	0.516	0.060	29.65	31.00	1.303	21.4°C
Back Side	251/848.8	GPRS 2TS	0.831	0.439	0.060	29.56	31.00	1.158	21.4°C
Back Side with Headset	128/824.2	GSM	0.989	0.566	0.180	31.70	33.50	1.497	21.4°C
Back Side with Headset-repeated*	128/824.2	GSM	0.916	0.514	0.150	31.70	33.50	1.386	21.4°C
Right Side	190/836.6	GPRS 2TS	0.220	0.136	-0.010	29.66	31.00	0.300	21.4°C
Top Side	190/836.6	GPRS 2TS	0.041	0.025	0.130	29.66	31.00	0.055	21.4°C
Bottom Side	190/836.6	GPRS 2TS	0.259	0.149	0.110	29.66	31.00	0.353	21.4°C

Table 26: Body SAR test results of GSM850

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664.

7.2.2 SAR measurement Result of GSM1900

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Left Hand Touched	661/1880	GSM	0.108	0.057	0.190	28.86	30.50	0.158	21.4°C
Left Hand Tilted 15°	661/1880	GSM	0.109	0.579	0.130	28.86	30.50	0.159	21.4°C
Right Hand Touched	661/1880	GSM	0.424	0.200	0.180	28.86	30.50	0.619	21.4°C
Right Hand Touched	512/1850.2	GSM	0.380	0.186	0.120	29.08	30.50	0.527	21.4°C
Right Hand Touched	810/1909.8	GSM	0.397	0.194	-0.150	28.71	30.50	0.600	21.4°C
Right Hand Tilted 15°	661/1880	GSM	0.395	0.188	0.140	28.86	30.50	0.576	21.4°C

Table 27: Head SAR test results of GSM1900

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Back Side	661/1880	GPRS 2TS	0.704	0.334	-0.010	25.87	27.50	1.025	21.4°C
Back Side	512/1850.2	GPRS 2TS	0.697	0.334	-0.030	26.12	27.50	0.958	21.4°C
Back Side	810/1909.8	GPRS 2TS	0.704	0.333	-0.010	25.90	27.50	1.018	21.4°C
Right Side	661/1880	GPRS 2TS	0.546	0.247	-0.030	25.87	27.50	0.795	21.4°C
Top Side	661/1880	GPRS 2TS	0.010	0.005	0.070	25.87	27.50	0.014	21.4°C
Bottom Side	661/1880	GPRS 2TS	0.134	0.061	0.080	25.87	27.50	0.195	21.4°C

Table 28: Body SAR test results of GSM1900

7.2.3 SAR measurement Result of UMTS Band V

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Left Hand Touched	4182/836.4	RMC	0.243	0.143	-0.070	22.90	24.00	0.313	21.4°C
Left Hand Tilted 15°	4182/836.4	RMC	0.213	0.127	-0.030	22.90	24.00	0.274	21.4°C
Right Hand Touched	4182/836.4	RMC	0.468	0.245	-0.040	22.90	24.00	0.603	21.4°C
Right Hand Touched	4132/826.4	RMC	0.484	0.253	-0.090	22.79	24.00	0.640	21.4°C
Right Hand Touched	4233/846.6	RMC	0.427	0.224	0.020	22.72	24.00	0.573	21.4°C
Right Hand Tilted 15°	4182/836.4	RMC	0.352	0.189	-0.050	22.90	24.00	0.453	21.4°C

Table 29: Head SAR test results of UMTS Band V

Test Position of Body with 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Back Side	4182/836.4	RMC	0.756	0.431	0.150	22.90	24.00	0.974	21.4°C
Back Side	4132/826.4	RMC	0.796	0.455	0.090	22.79	24.00	1.052	21.4°C
Back Side	4233/846.6	RMC	0.720	0.413	0.170	22.72	24.00	0.967	21.4°C
Right Side	4182/836.4	RMC	0.222	0.134	-0.190	22.90	24.00	0.286	21.4°C
Top Side	4182/836.4	RMC	0.020	0.013	-0.150	22.90	24.00	0.026	21.4°C
Bottom Side	4182/836.4	RMC	0.159	0.089	0.060	22.90	24.00	0.205	21.4°C

Table 30: Body SAR test results of UMTS Band V

7.2.4 SAR measurement Result of UMTS Band IV

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Left Hand Touched	1413/1732.6	RMC	0.192	0.105	-0.090	23.06	24.00	0.238	21.4°C
Left Hand Tilted 15°	1413/1732.6	RMC	0.170	0.092	-0.070	23.06	24.00	0.211	21.4°C
Right Hand Touched	1413/1732.6	RMC	0.545	0.274	-0.010	23.06	24.00	0.677	21.4°C
Right Hand Touched	1312/1712.4	RMC	0.493	0.257	-0.030	22.95	24.00	0.628	21.4°C
Right Hand Touched	1513/1752.6	RMC	0.692	0.344	0.040	22.83	24.00	0.906	21.4°C
Right Hand Tilted 15°	1413/1732.6	RMC	0.459	0.235	-0.040	23.06	24.00	0.570	21.4°C

Table 31: Head SAR test results of UMTS Band IV

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Back Side	1413/1732.6	RMC	0.731	0.367	0.040	23.06	24.00	0.908	21.4°C
Back Side	1312/1712.4	RMC	0.691	0.354	0.180	22.95	24.00	0.880	21.4°C
Back Side	1513/1752.6	RMC	0.838	0.418	0.020	22.83	24.00	1.097	21.4°C
Back Side-Repeated*	1513/1752.6	RMC	0.838	0.418	0.180	22.83	24.00	1.097	21.4°C
Right Side	1413/1732.6	RMC	0.392	0.170	0.130	23.06	24.00	0.487	21.4°C
Top Side	1413/1732.6	RMC	0.020	0.009	-0.160	23.06	24.00	0.025	21.4°C
Bottom Side	1413/1732.6	RMC	0.282	0.136	0.090	23.06	24.00	0.350	21.4°C

Table 32: Body SAR test results of UMTS Band IV

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664.

7.2.5 SAR measurement Result of UMTS Band II

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Left Hand Touched	9400/1880	RMC	0.301	0.161	-0.110	22.41	24.00	0.434	21.4°C
Left Hand Tilted 15°	9400/1880	RMC	0.297	0.158	0.110	22.41	24.00	0.428	21.4°C
Right Hand Touched	9400/1880	RMC	1.030	0.485	0.110	22.41	24.00	1.485	21.4°C
Right Hand Touched-repeated	9400/1880	RMC	0.919	0.448	0.170	22.41	24.00	1.325	21.4°C
Right Hand Touched	9262/1852.4	RMC	1.000	0.475	0.070	22.37	24.00	1.455	21.4°C
Right Hand Touched	9538/1907.6	RMC	1.000	0.472	0.040	22.52	24.00	1.406	21.4°C
Right Hand Tilted 15°	9400/1880	RMC	0.955	0.458	-0.020	22.41	24.00	1.377	21.4°C
Right Hand Tilted 15°	9262/1852.4	RMC	0.840	0.403	0.120	22.37	24.00	1.223	21.4°C
Right Hand Tilted 15°	9538/1907.6	RMC	0.897	0.432	-0.080	22.52	24.00	1.261	21.4°C

Table 33: Head SAR test results of UMTS Band II

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Back Side	9400/1880	RMC	0.912	0.425	0.150	22.41	24.00	1.315	21.4°C
Back Side	9262/1852.4	RMC	0.848	0.403	0.080	22.37	24.00	1.234	21.4°C
Back Side	9538/1907.6	RMC	0.840	0.395	0.120	22.52	24.00	1.181	21.4°C
Back Side with Headset	9400/1880	RMC	0.942	0.445	0.180	22.41	24.00	1.358	21.4°C
Back Side with Headset-repeated*	9400/1880	RMC	0.909	0.424	0.170	22.41	24.00	1.311	21.4°C
Right Side	9400/1880	RMC	0.692	0.313	0.190	22.41	24.00	0.998	21.4°C
Right Side	9262/1852.4	RMC	0.647	0.293	0.100	22.37	24.00	0.942	21.4°C
Right Side	9538/1907.6	RMC	0.835	0.378	-0.050	22.52	24.00	1.174	21.4°C
Top Side	9400/1880	RMC	0.014	0.006	-0.170	22.41	24.00	0.020	21.4°C
Bottom Side	9400/1880	RMC	0.139	0.064	0.090	22.41	24.00	0.200	21.4°C

Table 34: Body SAR test results of UMTS Band II

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664.

7.2.6 SAR measurement Result of LTE Band IV

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
1RB									
Left Hand Touched	20175/1732.5	20M QPSK 1RB#50	0.332	0.182	0.010	22.24	23.50	0.444	21.4°C
Left Hand Tilted 15°	20175/1732.5	20M QPSK 1RB#50	0.308	0.165	0.100	22.24	23.50	0.412	21.4°C
Right Hand Touched	20175/1732.5	20M QPSK 1RB#50	0.878	0.443	0.030	22.24	23.50	1.174	21.4°C
Right Hand Touched	20050/1720	20M QPSK 1RB#50	0.852	0.438	0.070	22.13	23.50	1.168	21.4°C
Right Hand Touched	20300/1745	20M QPSK 1RB#50	1.070	0.535	-0.010	22.23	23.50	1.433	21.4°C
Right Hand Touched-Repeated*	20300/1745	20M QPSK 1RB#50	1.080	0.530	-0.080	22.23	23.50	1.447	21.4°C
Right Hand Tilted 15°	20175/1732.5	20M QPSK 1RB#50	0.798	0.378	0.100	22.24	23.50	1.067	21.4°C
Right Hand Tilted 15°	20050/1720	20M QPSK 1RB#50	0.740	0.352	-0.140	22.13	23.50	1.014	21.4°C
Right Hand Tilted 15°	20300/1745	20M QPSK 1RB#50	0.962	0.452	0.100	22.23	23.50	1.289	21.4°C
50%RB									
Left Hand Touched	20175/1732.5	20M QPSK 50%RB# 25	0.263	0.145	0.020	21.16	22.70	0.375	21.4°C
Left Hand Tilted 15°	20175/1732.5	20M QPSK 50%RB# 25	0.258	0.139	0.070	21.16	22.70	0.368	21.4°C
Right Hand Touched	20175/1732.5	20M QPSK 50%RB# 25	0.728	0.367	0.130	21.16	22.70	1.038	21.4°C
Right Hand Touched	20050/1720	20M QPSK 50%RB# 25	0.686	0.350	0.020	21.07	22.70	0.998	21.4°C

Right Hand Touched	20300/1745	20M QPSK 50%RB# 0	0.841	0.420	-0.090	21.03	22.70	1.235	21.4°C
Right Hand Tilted 15°	20175/1732.5	20M QPSK 50%RB# 25	0.648	0.306	0.080	21.16	22.70	0.924	21.4°C
Right Hand Tilted 15°	20050/1720	20M QPSK 50%RB# 25	0.610	0.289	0.130	21.07	22.70	0.888	21.4°C
Right Hand Tilted 15°	20300/1745	20M QPSK 50%RB# 0	0.729	0.344	0.020	21.03	22.70	1.071	21.4°C
100%RB									
Right Hand Touched	20175/1732.5	20M QPSK 100%RB #0	0.737	0.372	0.050	21.02	22.70	1.085	21.4°C
Right Hand Tilted 15°	20175/1732.5	20M QPSK 100%RB #0	0.655	0.314	0.020	21.02	22.70	0.964	21.4°C

Table 35: Head SAR test results of LTE Band IV

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664.

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
1RB									
Back Side	20175/1732.5	20M QPSK 1RB#50	0.986	0.470	0.080	22.24	23.50	1.318	21.4°C
Back Side	20050/1720	20M QPSK 1RB#50	0.927	0.443	0.030	22.13	23.50	1.271	21.4°C
Back Side	20300/1745	20M QPSK 1RB#50	1.070	0.506	0.070	22.23	23.50	1.433	21.4°C
Back Side with Headset	20300/1745	20M QPSK 1RB#50	1.030	0.518	0.140	22.23	23.50	1.380	21.4°C
Back Side-Repeated*	20300/1745	20M QPSK 1RB#50	1.080	0.515	0.130	22.23	23.50	1.447	21.4°C
Right Side	20175/1732.5	20M QPSK 1RB#50	0.423	0.180	-0.190	22.16	23.50	0.576	21.4°C
Top Side	20175/1732.5	20M QPSK 1RB#50	0.018	0.008	0.190	22.16	23.50	0.024	21.4°C
Bottom Side	20175/1732.5	20M QPSK 1RB#50	0.306	0.148	0.150	22.16	23.50	0.417	21.4°C
50%RB									
Back Side	20175/1732.5	20M QPSK 50%RB# 25	0.795	0.378	0.160	21.16	22.70	1.133	21.4°C
Back Side	20050/1720	20M QPSK 50%RB# 25	0.748	0.361	0.140	21.07	22.70	1.089	21.4°C
Back Side	20300/1745	20M QPSK 50%RB# 0	0.847	0.400	0.000	21.03	22.70	1.244	21.4°C
Right Side	20175/1732.5	20M QPSK 50%RB# 25	0.319	0.141	0.030	21.16	22.70	0.455	21.4°C
Top Side	20175/1732.5	20M QPSK 50%RB# 25	0.014	0.007	0.170	21.16	22.70	0.020	21.4°C
Bottom Side	20175/1732.5	20M QPSK 50%RB# 25	0.242	0.117	0.160	21.16	22.70	0.345	21.4°C



100%RB									
Back Side	20175/1732.5	20M QPSK 100%RB #0	0.756	0.365	0.190	21.02	22.70	1.113	21.4°C

Table 36: Body SAR test results of LTE Band IV

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664.

7.2.7 SAR measurement Result of LTE Band II

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Condu cted Power (dBm)	Tune- up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
1RB									
Left Hand Touched	18900/1880	20M QPSK 1RB#99	0.238	0.126	0.010	22.34	23.50	0.311	21.4°C
Left Hand Tilted 15°	18900/1880	20M QPSK 1RB#99	0.208	0.110	0.010	22.34	23.50	0.272	21.4°C
Right Hand Touched	18900/1880	20M QPSK 1RB#99	0.770	0.365	0.140	22.34	23.50	1.006	21.4°C
Right Hand Touched	18700/1860	20M QPSK 1RB#50	0.786	0.378	0.050	21.93	23.50	1.128	21.4°C
Right Hand Touched	19100/1900	20M QPSK 1RB#0	0.735	0.357	0.030	22.24	23.50	0.982	21.4°C
Right Hand Tilted 15°	18900/1880	20M QPSK 1RB#99	0.729	0.347	-0.010	22.34	23.50	0.952	21.4°C
Right Hand Tilted 15°	18700/1860	20M QPSK 1RB#50	0.662	0.320	0.200	21.93	23.50	0.950	21.4°C
Right Hand Tilted 15°	19100/1900	20M QPSK 1RB#0	0.646	0.311	0.060	22.24	23.50	0.863	21.4°C
50%RB									
Left Hand Touched	19100/1900	20M QPSK 50%RB# 25	0.197	0.104	0.140	21.14	22.70	0.282	21.4°C
Left Hand Tilted 15°	19100/1900	20M QPSK 50%RB# 25	0.172	0.090	0.180	21.14	22.70	0.246	21.4°C
Right Hand Touched	19100/1900	20M QPSK 50%RB# 25	0.602	0.290	0.110	21.14	22.70	0.862	21.4°C
Right Hand Touched	18700/1860	20M QPSK 50%RB# 25	0.655	0.315	-0.020	20.89	22.70	0.994	21.4°C
Right Hand Touched	18900/1880	20M QPSK 50%RB# 50	0.591	0.282	0.100	20.94	22.70	0.886	21.4°C

Right Hand Tilted 15°	19100/1900	20M QPSK 50%RB# 25	0.493	0.238	0.140	21.14	22.70	0.706	21.4°C
100%RB									
Right Hand Touched	19100/1900	20M QPSK 100%RB #0	0.657	0.307	0.120	21.10	22.70	0.950	21.4°C
Right Hand Tilted 15°	19100/1900	20M QPSK 100%RB #0	0.600	0.284	0.040	21.10	22.70	0.867	21.4°C

Table 37: Head SAR test results of LTE Band II

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
1RB									
Back Side	18900/1880	20M QPSK 1RB#99	0.666	0.317	-0.110	22.34	23.50	0.870	21.4°C
Back Side	18700/1860	20M QPSK 1RB#50	0.715	0.335	0.160	21.93	23.50	1.026	21.4°C
Back Side	19100/1900	20M QPSK 1RB#0	0.682	0.320	0.020	22.24	23.50	0.912	21.4°C
Right Side	18900/1880	20M QPSK 1RB#99	0.495	0.230	-0.020	22.34	23.50	0.647	21.4°C
Top Side	18900/1880	20M QPSK 1RB#99	0.011	0.006	0.020	22.34	23.50	0.014	21.4°C
Bottom Side	18900/1880	20M QPSK 1RB#99	0.135	0.064	0.120	22.34	23.50	0.176	21.4°C
50%RB									
Back Side	19100/1900	20M QPSK 50%RB# 25	0.605	0.301	0.160	21.14	22.70	0.866	21.4°C
Back Side	18700/1860	20M QPSK 50%RB# 25	0.544	0.261	-0.180	20.89	22.70	0.825	21.4°C
Back Side	18900/1880	20M QPSK 50%RB# 50	0.612	0.291	0.010	20.94	22.70	0.918	21.4°C
Right Side	19100/1900	20M QPSK 50%RB# 25	0.441	0.202	0.070	21.14	22.70	0.632	21.4°C
Top Side	19100/1900	20M QPSK 50%RB# 25	0.009	0.004	0.130	21.14	22.70	0.012	21.4°C
Bottom Side	19100/1900	20M QPSK 50%RB# 25	0.103	0.048	-0.120	21.14	22.70	0.148	21.4°C
100%RB									
Back Side	19100/1900	20M QPSK 100%RB #0	0.498	0.237	0.000	21.10	22.70	0.720	21.4°C

Table 38: Body SAR test results of LTE Band II

7.2.8 SAR measurement Result of LTE Band VII

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
1RB									
Left Hand Touched	20850/2510	20M QPSK 1RB#50	0.269	0.125	-0.15	22.31	23.50	0.354	21.4°C
Left Hand Tilted 15°	20850/2510	20M QPSK 1RB#50	0.280	0.130	0.10	22.31	23.50	0.368	21.4°C
Right Hand Touched	20850/2510	20M QPSK 1RB#50	0.740	0.336	0.15	22.31	23.50	0.973	21.4°C
Right Hand Touched	21100/2535	20M QPSK 1RB#0	0.717	0.323	0.13	22.20	23.50	0.967	21.4°C
Right Hand Touched	21350/2560	20M QPSK 1RB#99	0.648	0.291	0.09	22.03	23.50	0.909	21.4°C
Right Hand Tilted 15°	20850/2510	20M QPSK 1RB#50	0.902	0.396	-0.02	22.31	23.50	1.186	21.4°C
Right Hand Tilted 15°-repeated	20850/2510	20M QPSK 1RB#50	0.906	0.397	-0.02	22.31	23.50	1.192	21.4°C
Right Hand Tilted 15°	21100/2535	20M QPSK 1RB#0	0.871	0.377	0.02	22.20	23.50	1.175	21.4°C
Right Hand Tilted 15°	21350/2560	20M QPSK 1RB#99	0.832	0.359	0.11	22.03	23.50	1.167	21.4°C
50%RB									
Left Hand Touched	20850/2510	20M QPSK 50%RB#0	0.222	0.104	0.10	21.23	22.70	0.311	21.4°C
Left Hand Tilted 15°	20850/2510	20M QPSK 50%RB#0	0.224	0.104	0.09	21.23	22.70	0.314	21.4°C
Right Hand Touched	20850/2510	20M QPSK 50%RB#0	0.608	0.272	-0.13	21.23	22.70	0.853	21.4°C
Right Hand Touched	21100/2535	20M QPSK 50%RB#0	0.567	0.258	0.13	20.92	22.70	0.854	21.4°C
Right Hand Touched	21350/2560	20M QPSK 50%RB#25	0.536	0.242	0.12	20.82	22.70	0.826	21.4°C

Right Hand Tilted 15°	20850/2510	20M QPSK 50%RB# 0	0.721	0.316	0.05	21.23	22.70	1.011	21.4°C
Right Hand Tilted 15°	21100/2535	20M QPSK 50%RB# 0	0.700	0.304	0.15	20.92	22.70	1.055	21.4°C
Right Hand Tilted 15°	21350/2560	20M QPSK 50%RB# 25	0.682	0.292	0.18	20.82	22.70	1.051	21.4°C
100%RB									
Right Hand Touched	20850/2510	20M QPSK 100%RB #0	0.597	0.274	-0.16	21.13	22.70	0.857	21.4°C
Right Hand Tilted 15°	20850/2510	20M QPSK 100%RB #0	0.652	0.289	-0.11	21.13	22.70	0.936	21.4°C

Table 39: Head SAR test results of LTE Band VII

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Condu cted Power (dBm)	Tune- up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
1RB									
Back Side	20850/2510	20M QPSK 1RB#50	0.741	0.325	0.170	22.31	23.50	0.975	21.4°C
Back Side	21100/2535	20M QPSK 1RB#0	0.702	0.305	-0.060	22.20	23.50	0.947	21.4°C
Back Side	21350/2560	20M QPSK 1RB#99	0.667	0.287	0.130	22.03	23.50	0.936	21.4°C
Right Side	20850/2510	20M QPSK 1RB#50	0.975	0.392	0.130	22.31	23.50	1.282	21.4°C
Right Side	21100/2535	20M QPSK 1RB#0	0.839	0.339	0.200	22.20	23.50	1.132	21.4°C
Right Side	21350/2560	20M QPSK 1RB#99	0.922	0.370	-0.130	22.03	23.50	1.293	21.4°C
Right Side- repeated*	21350/2560	20M QPSK 1RB#99	0.992	0.408	-0.050	22.03	23.50	1.392	21.4°C
Top Side	20850/2510	20M QPSK 1RB#50	0.030	0.013	-0.110	22.31	23.50	0.039	21.4°C
Bottom Side	20850/2510	20M QPSK 1RB#50	0.240	0.082	0.190	22.31	23.50	0.316	21.4°C
50%RB									
Back Side	20850/2510	20M QPSK 50%RB# 0	0.429	0.212	0.010	21.23	22.70	0.602	21.4°C
Right Side	20850/2510	20M QPSK 50%RB# 0	0.797	0.322	0.110	21.23	22.70	1.118	21.4°C
Right Side	21100/2535	20M QPSK 50%RB# 0	0.756	0.308	0.080	20.92	22.70	1.139	21.4°C
Right Side	21350/2560	20M QPSK 50%RB# 25	0.847	0.343	0.130	20.82	22.70	1.306	21.4°C
Top Side	20850/2510	20M QPSK 50%RB# 0	0.027	0.013	0.110	21.23	22.70	0.038	21.4°C

Bottom Side	20850/2510	20M QPSK 50%RB# 0	0.195	0.075	-0.190	21.23	22.70	0.274	21.4°C
100%RB									
Back Side	20850/2510	20M QPSK 100%RB #0	0.677	0.294	0.070	21.13	22.70	0.972	21.4°C
Right Side	20850/2510	20M QPSK 100%RB #0	0.717	0.292	0.150	21.13	22.70	1.029	21.4°C

Table 40: Body SAR test results of LTE Band VII

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664.

7.2.9 SAR measurement Result of WiFi 2.4G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Left Hand Touched	6/2437	802.11 b	0.008	0.003	0.130	12.55	13.00	0.009	21.4°C
Left Hand Tilted 15°	6/2437	802.11 b	0.013	0.005	0.030	12.55	13.00	0.015	21.4°C
Left Hand Tilted 15°	1/2412	802.11 b	0.013	0.005	0.190	12.48	13.00	0.015	21.4°C
Left Hand Tilted 15°	11/2462	802.11 b	0.014	0.005	0.110	12.35	13.00	0.016	21.4°C
Right Hand Touched	6/2437	802.11 b	0.004	0.001	0.070	12.55	13.00	0.005	21.4°C
Right Hand Tilted 15°	6/2437	802.11 b	<0.001	<0.001	0.120	12.55	13.00	<0.001	21.4°C

Table 41: Head SAR test results of WiFi 2.4G

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Back Side	6/2437	802.11 b	1.280	0.482	0.160	12.55	13.00	1.420	21.4°C
Back Side-Repeated*	6/2437	802.11 b	1.270	0.477	0.160	12.55	13.00	1.409	21.4°C
Back Side	1/2412	802.11 b	1.180	0.441	0.040	12.48	13.00	1.330	21.4°C
Back Side	11/2462	802.11 b	1.190	0.436	0.070	12.35	13.00	1.382	21.4°C
Left Side	6/2437	802.11 b	0.945	0.380	-0.190	12.55	13.00	1.048	21.4°C
Left Side	1/2412	802.11 b	0.877	0.353	-0.130	12.48	13.00	0.989	21.4°C
Left Side	11/2462	802.11 b	0.848	0.337	-0.170	12.35	13.00	0.985	21.4°C
Top Side	6/2437	802.11 b	0.199	0.082	0.010	12.55	13.00	0.221	21.4°C

Table 42: Body SAR test results of WiFi 2.4G

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664.

7.2.10 SAR measurement Result of WiFi 5G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conduc ted Power (dBm)	Tune- up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data of 5.2GHz band									
Left Hand Touched	48/5240	11a	0.010	0.001	-0.050	10.62	12.00	0.014	21.6°C
Left Hand Touched	36/5180	11a	0.008	0.001	0.11	9.92	12.00	0.012	21.6°C
Left Hand Touched	40/5200	11a	0.008	0.001	0.09	10.12	12.00	0.012	21.6°C
Left Hand Touched	44/5220	11a	0.008	0.001	0.15	10.28	12.00	0.012	21.6°C
Left Hand Tilted 15°	48/5240	11a	<0.001	<0.001	-0.190	10.62	12.00	<0.001	21.6°C
Right Hand Touched	48/5240	11a	<0.001	<0.001	0.000	10.62	12.00	<0.001	21.6°C
Right Hand Tilted 15°	48/5240	11a	<0.001	<0.001	0.000	10.62	12.00	<0.001	21.6°C
Test data of 5.3GHz band									
Left Hand Touched	64/5320	11a	<0.001	<0.001	0.000	11.56	12.00	<0.001	21.6°C
Left Hand Tilted 15°	64/5320	11a	<0.001	<0.001	0.000	11.56	12.00	<0.001	21.6°C
Right Hand Touched	64/5320	11a	<0.001	<0.001	0.000	11.56	12.00	<0.001	21.6°C
Right Hand Tilted 15°	64/5320	11a	<0.001	<0.001	0.000	11.56	12.00	<0.001	21.6°C
Test data of 5.5GHz band									
Left Hand Touched	140/5700	11a	<0.001	<0.001	0.000	9.78	10.00	<0.001	21.6°C
Left Hand Tilted 15°	140/5700	11a	<0.001	<0.001	0.000	9.78	10.00	<0.001	21.6°C
Right Hand Touched	140/5700	11a	<0.001	<0.001	0.000	9.78	10.00	<0.001	21.6°C
Right Hand Tilted 15°	140/5700	11a	<0.001	<0.001	0.000	9.78	10.00	<0.001	21.6°C
Test data of 5.8GHz band									
Left Hand Touched	149/5745	11a	<0.001	<0.001	0.000	9.63	10.50	<0.001	21.6°C
Left Hand Tilted 15°	149/5745	11a	<0.001	<0.001	0.000	9.63	10.50	<0.001	21.6°C
Right Hand Touched	149/5745	11a	<0.001	<0.001	0.000	9.63	10.50	<0.001	21.6°C
Right Hand Tilted 15°	149/5745	11a	<0.001	<0.001	0.000	9.63	10.50	<0.001	21.6°C

Table 43: Head SAR test results of WiFi 5G

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Test data of 5.2GHz band									
Back Side	48/5240	11a	0.419	0.113	0.000	10.62	12.00	0.576	21.6°C
Left Side	48/5240	11a	0.981	0.204	0.050	10.62	12.00	1.348	21.6°C
Left Side	36/5180	11a	0.882	0.185	0.020	9.92	12.00	1.424	21.6°C
Left Side	40/5200	11a	0.884	0.181	-0.010	10.12	12.00	1.363	21.6°C
Left Side	44/5220	11a	0.884	0.185	-0.070	10.28	12.00	1.314	21.6°C
Top Side	48/5240	11a	0.091	0.035	-0.020	10.62	12.00	0.125	21.6°C
Test data of 5.3GHz band									
Back Side	64/5320	11a	0.492	0.136	-0.120	11.56	12.00	0.544	21.6°C
Left Side	64/5320	11a	1.220	0.298	-0.170	11.56	12.00	1.350	21.6°C
Left Side	52/5260	11a	1.120	0.228	0.180	10.83	12.00	1.466	21.6°C
Left Side	56/5280	11a	1.030	0.192	-0.060	11.08	12.00	1.273	21.6°C
Left Side	60/5300	11a	1.100	0.214	-0.160	11.32	12.00	1.286	21.6°C
Top Side	64/5320	11a	0.026	0.009	-0.060	11.56	12.00	0.029	21.6°C
Test data of 5.5GHz band									
Back Side	140/5700	11a	0.404	0.117	0.000	9.78	10.00	0.425	21.6°C
Left Side	140/5700	11a	1.270	0.249	-0.190	9.78	10.00	1.336	21.6°C
Left Side-repeated*	140/5700	11a	1.130	0.213	0.000	9.78	10.00	1.189	21.6°C
Left Side	100/5500	11a	0.929	0.174	0.090	8.43	10.00	1.334	21.6°C
Left Side	104/5520	11a	0.943	0.179	0.060	8.39	10.00	1.366	21.6°C
Left Side	108/5540	11a	0.946	0.182	0.190	8.04	10.00	1.486	21.6°C
Left Side	112/5560	11a	0.971	0.185	0.090	8.17	10.00	1.480	21.6°C
Left Side	116/5580	11a	0.841	0.158	0.070	8.13	10.00	1.294	21.6°C
Left Side	132/5660	11a	0.983	0.184	0.140	9.57	10.00	1.085	21.6°C
Left Side	136/5680	11a	0.995	0.186	0.000	9.56	10.00	1.101	21.6°C
Top Side	140/5700	11a	0.021	0.005	0.000	9.78	10.00	0.022	21.6°C
Test data of 5.8GHz band									
Back Side	149/5745	11a	0.381	0.112	0.000	9.63	10.50	0.466	21.6°C
Left Side	149/5745	11a	1.120	0.223	0.150	9.63	10.50	1.368	21.6°C
Left Side	153/5765	11a	1.100	0.207	-0.120	9.60	10.50	1.353	21.6°C
Left Side	157/5785	11a	1.030	0.187	0.000	9.53	10.50	1.288	21.6°C
Left Side	161/5805	11a	0.970	0.183	0.000	9.45	10.50	1.235	21.6°C
Left Side	165/5825	11a	0.977	0.184	-0.020	9.15	10.50	1.333	21.6°C
Top Side	149/5745	11a	0.017	0.005	0.030	9.63	10.50	0.021	21.6°C


Table 44: Body SAR test results of WiFi 5G

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664.

7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v05r02.

The location of the antennas inside the device is shown as below picture:

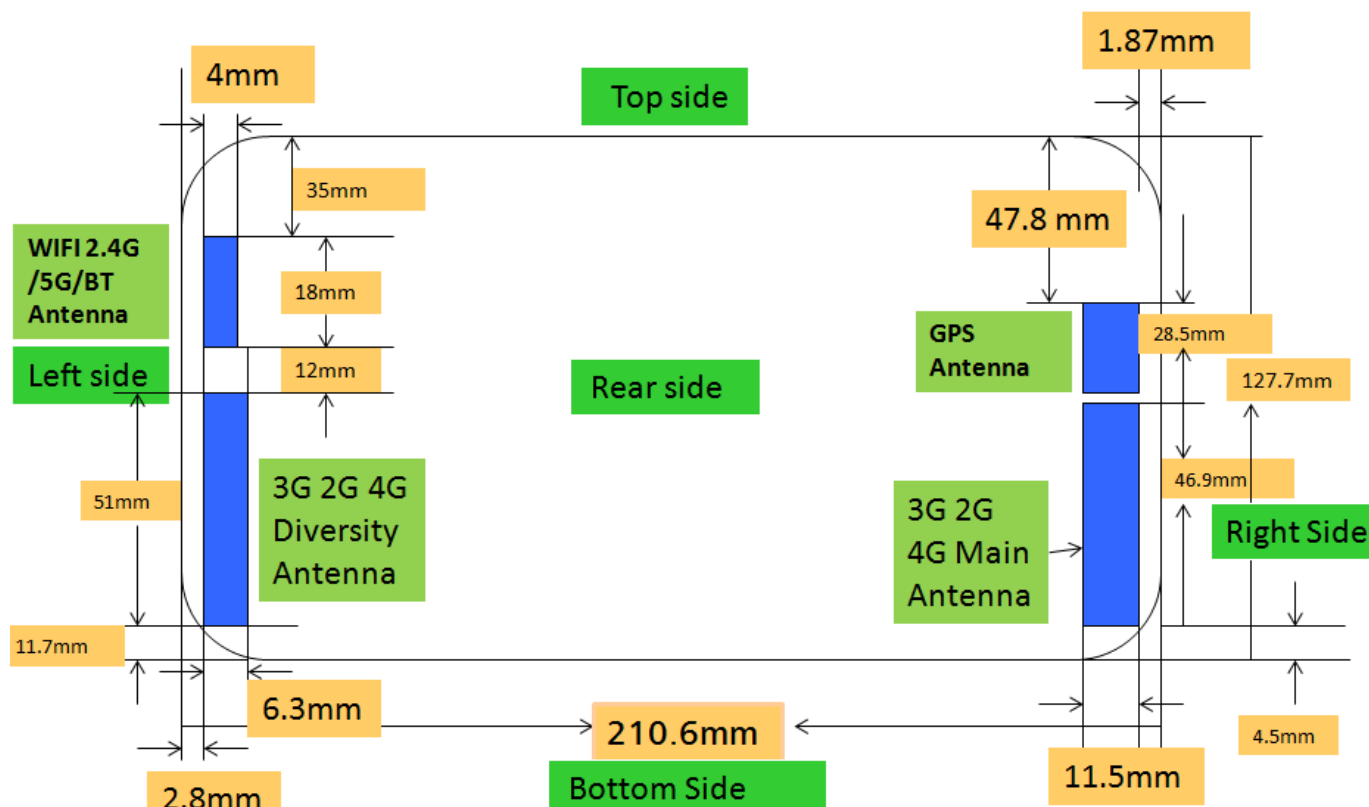

Note:Diversity antenna is used to improve the acceptance of performance of the main antenna. It does not have the transmitter function.

The Body SAR measurement sides and edges of each band are as below:

Antenna	Back Side	Left Side	Right Side	Top Side	Bottom Side
2G/3G/4G Antenna	Yes	NO	Yes	Yes	Yes
WiFi 2.4G/5G/BT	Yes	Yes	NO	Yes	NO

Table 45: SAR measurement positions

Note:Per FCC KDB 616217,the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom.The SAR Exclusion Threshold in KDB 447498D01 can be applied to determine SAR test exclusion for adjacent edge configurations.The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges,with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

7.3.1 Stand-alone SAR Test Exclusion

Per FCC KDB 447498 D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Body position

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
BT	Body	9.50	8.91	5	2.480	2.81	3.00	Yes

Table 46: Standalone SAR test exclusion for BT

Note:

- 1)* - maximum possible output power(including tune-up tolerance) declared by manufacturer.
- 2) Held to ear configurations are not applicable to Bluetooth for this device.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
BT	Body	9.50	8.91	5	2.480	7.5	0.374

Table 47: Estimated SAR calculation for BT

Note: 1) * - maximum possible output power declared by manufacturer

7.3.2 Simultaneous Transmission Possibilities

Per FCC KDB 447498D01v05 r02, SAR compliance for simultaneous transmission must be considered when the maximum duration of overlapping transmissions. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis.

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Head	Body
1	GSM/UMTS/LTE + WiFi 2.4G	Yes	Yes
2	GSM/UMTS/LTE + WiFi 5G	Yes	Yes
3	GSM/UMTS/LTE + BT	N/A	Yes

Table 48: Simultaneous Transmission Possibilities

Note:

- 1) The device does not support simultaneous BT and WiFi, because they share the same antenna, use the technique of Time Division Multiplexer and cannot transmit simultaneously.
- 2) Held to ear configurations are not applicable to Bluetooth for this device.

7.3.3 SAR Summation Scenario

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		GSM850	WiFi 2.4G			
Head SAR	Left Hand Touched	0.319	0.009	0.328	N/A	N/A
	Left Hand Tilted 15°	0.303	0.016	0.319	N/A	N/A
	Right Hand Touched	0.575	0.005	0.580	N/A	N/A
	Right Hand Tilted 15°	0.448	<0.001	<0.449	N/A	N/A
Body SAR	Back Side	1.497	1.420	See 7.3.4	0.024	N/A
	Left Side	/	1.048	1.048	N/A	N/A
	Right Side	0.300	/	0.300	N/A	N/A
	Top Side	0.055	0.221	0.276	N/A	N/A
	Bottom Side	0.353	/	0.353	N/A	N/A

Table 49: Simultaneous Tx Combination of GSM850 and WiFi 2.4G.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		GSM1900	WiFi 2.4G			
Head SAR	Left Hand Touched	0.158	0.009	0.167	N/A	N/A
	Left Hand Tilted 15°	0.159	0.016	0.175	N/A	N/A
	Right Hand Touched	0.619	0.005	0.623	N/A	N/A
	Right Hand Tilted 15°	0.576	<0.001	<0.577	N/A	N/A
Body SAR	Back Side	1.025	1.420	See 7.3.4	0.018	N/A
	Left Side	/	1.048	1.048	N/A	N/A
	Right Side	0.795	/	0.795	N/A	N/A
	Top Side	0.014	0.221	0.235	N/A	N/A
	Bottom Side	0.195	/	0.195	N/A	N/A

Table 50: Simultaneous Tx Combination of GSM1900 and WiFi 2.4G.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		UMTS Band V	WiFi 2.4G			
Head SAR	Left Hand Touched	0.313	0.009	0.322	N/A	N/A
	Left Hand Tilted 15°	0.274	0.016	0.290	N/A	N/A
	Right Hand Touched	0.640	0.005	0.644	N/A	N/A
	Right Hand Tilted 15°	0.453	<0.001	<0.454	N/A	N/A
Body SAR	Back Side	1.052	1.420	See 7.3.4	0.019	N/A
	Left Side	/	1.048	1.048	N/A	N/A
	Right Side	0.286	/	0.286	N/A	N/A
	Top Side	0.026	0.221	0.247	N/A	N/A
	Bottom Side	0.205	/	0.205	N/A	N/A

Table 51: Simultaneous Tx Combination of UMTS Band V and WiFi 2.4G.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		UMTS Band IV	WiFi 2.4G			
Head SAR	Left Hand Touched	0.238	0.009	0.248	N/A	N/A
	Left Hand Tilted 15°	0.211	0.016	0.227	N/A	N/A
	Right Hand Touched	0.906	0.005	0.911	N/A	N/A
	Right Hand Tilted 15°	0.570	<0.001	<0.571	N/A	N/A
Body SAR	Back Side	1.097	1.420	See 7.3.4	0.019	N/A
	Left Side	/	1.048	1.048	N/A	N/A
	Right Side	0.487	/	0.487	N/A	N/A
	Top Side	0.025	0.221	0.246	N/A	N/A
	Bottom Side	0.350	/	0.350	N/A	N/A

Table 52: Simultaneous Tx Combination of UMTS Band IV and WiFi 2.4G .

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		UMTS Band II	WiFi 2.4G			
Head SAR	Left Hand Touched	0.434	0.009	0.443	N/A	N/A
	Left Hand Tilted 15°	0.428	0.016	0.444	N/A	N/A
	Right Hand Touched	1.485	0.005	1.490	N/A	N/A
	Right Hand Tilted 15°	1.377	<0.001	<1.378	N/A	N/A
Body SAR	Back Side	1.358	1.420	See 7.3.4	0.022	N/A
	Left Side	/	1.048	1.048	N/A	N/A
	Right Side	1.174	/	1.174	N/A	N/A
	Top Side	0.020	0.221	0.241	N/A	N/A
	Bottom Side	0.200	/	0.200	N/A	N/A

Table 53: Simultaneous Tx Combination of UMTS Band II and WiFi 2.4G.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		LTE Band IV	WiFi 2.4G			
Head SAR	Left Hand Touched	0.444	0.009	0.453	N/A	N/A
	Left Hand Tilted 15°	0.412	0.016	0.428	N/A	N/A
	Right Hand Touched	1.447	0.005	1.451	N/A	N/A
	Right Hand Tilted 15°	1.289	<0.001	<1.290	N/A	N/A
Body SAR	Back Side	1.447	1.420	See 7.3.4	0.023	N/A
	Left Side	/	1.048	1.048	N/A	N/A
	Right Side	0.576	/	0.576	N/A	N/A
	Top Side	0.024	0.221	0.245	N/A	N/A
	Bottom Side	0.417	/	0.417	N/A	N/A

Table 54: Simultaneous Tx Combination of LTE Band IV and WiFi 2.4G.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		LTE Band II	WiFi 2.4G			
Head SAR	Left Hand Touched	0.311	0.009	0.320	N/A	N/A
	Left Hand Tilted 15°	0.272	0.016	0.288	N/A	N/A
	Right Hand Touched	1.128	0.005	1.133	N/A	N/A
	Right Hand Tilted 15°	0.952	<0.001	<0.953	N/A	N/A
Body SAR	Back Side	1.026	1.420	See 7.3.4	0.019	N/A
	Left Side	/	1.048	1.048	N/A	N/A
	Right Side	0.647	/	0.647	N/A	N/A
	Top Side	0.014	0.221	0.235	N/A	N/A
	Bottom Side	0.176	/	0.176	N/A	N/A

Table 55: Simultaneous Tx Combination of LTE Band II and WiFi 2.4G.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		LTE Band VII	WiFi 2.4G			
Head SAR	Left Hand Touched	0.354	0.009	0.363	N/A	N/A
	Left Hand Tilted 15°	0.368	0.016	0.384	N/A	N/A
	Right Hand Touched	0.973	0.005	0.978	N/A	N/A
	Right Hand Tilted 15°	1.192	<0.001	<1.193	N/A	N/A
Body SAR	Back Side	0.975	1.420	See 7.3.4	0.018	N/A
	Left Side	/	1.048	1.048	N/A	N/A
	Right Side	1.392	/	1.392	N/A	N/A
	Top Side	0.039	0.221	0.260	N/A	N/A
	Bottom Side	0.316	/	0.316	N/A	N/A

Table 56: Simultaneous Tx Combination of LTE Band VII and WiFi 2.4G.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		GSM850	WiFi 5G			
Head SAR	Left Hand Touched	0.319	0.014	0.333	N/A	N/A
	Left Hand Tilted 15°	0.303	<0.001	<0.304	N/A	N/A
	Right Hand Touched	0.575	<0.001	<0.576	N/A	N/A
	Right Hand Tilted 15°	0.448	<0.001	<0.449	N/A	N/A
Body SAR	Back Side	1.497	0.576	See 7.3.4	0.014	N/A
	Left Side	/	1.486	1.486	N/A	N/A
	Right Side	0.300	/	0.300	N/A	N/A
	Top Side	0.055	0.124	0.179	N/A	N/A
	Bottom Side	0.353	/	0.353	N/A	N/A

Table 57: Simultaneous Tx Combination of GSM850 and WiFi 5G.

Test Position		Scaled or Estimated SAR _{Max}		1g- Σ SAR W/kg	SPLSR	Remark
		GSM1900	WiFi 5G			
Head SAR	Left Hand Touched	0.158	0.014	0.172	N/A	N/A
	Left Hand Tilted 15°	0.159	<0.001	<0.160	N/A	N/A
	Right Hand Touched	0.619	<0.001	<0.620	N/A	N/A
	Right Hand Tilted 15°	0.576	<0.001	<0.577	N/A	N/A
Body SAR	Back Side	1.025	0.576	See 7.3.4	0.010	N/A
	Left Side	/	1.486	1.486	N/A	N/A
	Right Side	0.795	/	0.795	N/A	N/A
	Top Side	0.014	0.124	0.138	N/A	N/A
	Bottom Side	0.195	/	0.195	N/A	N/A

Table 58: Simultaneous Tx Combination of GSM1900 and WiFi 5G.

Test Position		Scaled or Estimated SAR _{Max}		1g- Σ SAR W/kg	SPLSR	Remark
		UMTS Band V	WiFi 5G			
Head SAR	Left Hand Touched	0.313	0.014	0.327	N/A	N/A
	Left Hand Tilted 15°	0.274	<0.001	<0.275	N/A	N/A
	Right Hand Touched	0.640	<0.001	<0.641	N/A	N/A
	Right Hand Tilted 15°	0.453	<0.001	<0.454	N/A	N/A
Body SAR	Back Side	1.052	0.576	See 7.3.4	0.010	N/A
	Left Side	/	1.486	1.486	N/A	N/A
	Right Side	0.286	/	0.286	N/A	N/A
	Top Side	0.026	0.124	0.150	N/A	N/A
	Bottom Side	0.205	/	0.205	N/A	N/A

Table 59: Simultaneous Tx Combination of UMTS Band V and WiFi 5G.

Test Position		Scaled or Estimated SAR _{Max}		1g- Σ SAR W/kg	SPLSR	Remark
		UMTS Band IV	WiFi 5G			
Head SAR	Left Hand Touched	0.238	0.014	0.252	N/A	N/A
	Left Hand Tilted 15°	0.211	<0.001	<0.212	N/A	N/A
	Right Hand Touched	0.906	<0.001	<0.907	N/A	N/A
	Right Hand Tilted 15°	0.570	<0.001	<0.571	N/A	N/A
Body SAR	Back Side	1.097	0.576	See 7.3.4	0.010	N/A
	Left Side	/	1.486	1.486	N/A	N/A
	Right Side	0.487	/	0.487	N/A	N/A
	Top Side	0.025	0.124	0.149	N/A	N/A
	Bottom Side	0.350	/	0.350	N/A	N/A

Table 60: Simultaneous Tx Combination of UMTS Band IV and WiFi 5G.

Test Position		Scaled or Estimated SAR _{Max}		1g- Σ SAR W/kg	SPLSR	Remark
		UMTS Band II	WiFi 5G			
Head SAR	Left Hand Touched	0.434	0.014	0.448	N/A	N/A
	Left Hand Tilted 15°	0.428	<0.001	<0.429	N/A	N/A
	Right Hand Touched	1.485	<0.001	<1.486	N/A	N/A
	Right Hand Tilted 15°	1.377	<0.001	<1.378	N/A	N/A
Body SAR	Back Side	1.358	0.576	See 7.3.4	0.013	N/A
	Left Side	/	1.486	1.486	N/A	N/A
	Right Side	1.174	/	1.174	N/A	N/A
	Top Side	0.020	0.124	0.144	N/A	N/A
	Bottom Side	0.200	/	0.200	N/A	N/A

Table 61: Simultaneous Tx Combination of UMTS Band II and WiFi 5G.

Test Position		Scaled or Estimated SAR _{Max}		1g- Σ SAR W/kg	SPLSR	Remark
		LTE Band IV	WiFi 5G			
Head SAR	Left Hand Touched	0.444	0.014	0.458	N/A	N/A
	Left Hand Tilted 15°	0.412	<0.001	<0.413	N/A	N/A
	Right Hand Touched	1.447	<0.001	<1.448	N/A	N/A
	Right Hand Tilted 15°	1.289	<0.001	<1.290	N/A	N/A
Body SAR	Back Side	1.447	0.576	See 7.3.4	0.014	N/A
	Left Side	/	1.486	1.486	N/A	N/A
	Right Side	0.576	/	0.576	N/A	N/A
	Top Side	0.024	0.124	0.148	N/A	N/A
	Bottom Side	0.417	/	0.417	N/A	N/A

Table 62: Simultaneous Tx Combination of LTE Band IV and WiFi 5G.

Test Position		Scaled or Estimated SAR _{Max}		1g- Σ SAR W/kg	SPLSR	Remark
		LTE Band II	WiFi 5G			
Head SAR	Left Hand Touched	0.311	0.014	0.325	N/A	N/A
	Left Hand Tilted 15°	0.272	<0.001	<0.273	N/A	N/A
	Right Hand Touched	1.128	<0.001	<1.129	N/A	N/A
	Right Hand Tilted 15°	0.952	<0.001	<0.953	N/A	N/A
Body SAR	Back Side	1.026	0.576	See 7.3.4	0.010	N/A
	Left Side	/	1.486	1.486	N/A	N/A
	Right Side	0.647	/	0.647	N/A	N/A
	Top Side	0.014	0.124	0.138	N/A	N/A
	Bottom Side	0.176	/	0.176	N/A	N/A

Table 63: Simultaneous Tx Combination of LTE Band II and WiFi 5G.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		LTE Band VII	WiFi 5G			
Head SAR	Left Hand Touched	0.354	0.014	0.368	N/A	N/A
	Left Hand Tilted 15°	0.368	<0.001	<0.369	N/A	N/A
	Right Hand Touched	0.973	<0.001	<0.974	N/A	N/A
	Right Hand Tilted 15°	1.192	<0.001	<1.193	N/A	N/A
Body SAR	Back Side	0.975	0.576	1.551	N/A	N/A
	Left Side	/	1.486	1.486	N/A	N/A
	Right Side	1.392	/	1.392	N/A	N/A
	Top Side	0.039	0.124	0.163	N/A	N/A
	Bottom Side	0.316	/	0.316	N/A	N/A

Table 64: Simultaneous Tx Combination of LTE Band VII and WiFi 5G.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		GSM850	BT			
Body SAR	Back Side	1.497	0.374	See 7.3.4	0.012	N/A
	Left Side	/	0.374	0.374	N/A	N/A
	Right Side	0.300	/	0.300	N/A	N/A
	Top Side	0.055	0.374	0.429	N/A	N/A
	Bottom Side	0.353	/	0.353	N/A	N/A

Table 65: Simultaneous Tx Combination of GSM850 and BT.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		GSM1900	BT			
Body SAR	Back Side	1.025	0.374	1.399	N/A	N/A
	Left Side	/	0.374	0.374	N/A	N/A
	Right Side	0.795	/	0.795	N/A	N/A
	Top Side	0.014	0.374	0.388	N/A	N/A
	Bottom Side	0.195	/	0.195	N/A	N/A

Table 66: Simultaneous Tx Combination of GSM1900 and BT.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		UMTS Band V	BT			
Body SAR	Back Side	1.052	0.374	1.426	N/A	N/A
	Left Side	/	0.374	0.374	N/A	N/A
	Right Side	0.286	/	0.286	N/A	N/A
	Top Side	0.026	0.374	0.400	N/A	N/A
	Bottom Side	0.205	/	0.205	N/A	N/A

Table 67: Simultaneous Tx Combination of UMTS Band V and BT.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		UMTS Band IV	BT			
Body SAR	Back Side	1.097	0.374	1.471	N/A	N/A
	Left Side	/	0.374	0.374	N/A	N/A
	Right Side	0.487	/	0.487	N/A	N/A
	Top Side	0.025	0.374	0.399	N/A	N/A
	Bottom Side	0.350	/	0.350	N/A	N/A

Table 68: Simultaneous Tx Combination of UMTS Band IV and BT.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		UMTS Band II	BT			
Body SAR	Back Side	1.358	0.374	See 7.3.4	0.011	N/A
	Left Side	/	0.374	0.374	N/A	N/A
	Right Side	1.174	/	1.174	N/A	N/A
	Top Side	0.020	0.374	0.394	N/A	N/A
	Bottom Side	0.200	/	0.200	N/A	N/A

Table 69: Simultaneous Tx Combination of UMTS Band II and BT.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		LTE Band IV	BT			
Body SAR	Back Side	1.447	0.374	See 7.3.4	0.012	N/A
	Left Side	/	0.374	0.374	N/A	N/A
	Right Side	0.576	/	0.576	N/A	N/A
	Top Side	0.024	0.374	0.398	N/A	N/A
	Bottom Side	0.417	/	0.417	N/A	N/A

Table 70: Simultaneous Tx Combination of LTE Band IV and BT.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		LTE Band II	BT			
Body SAR	Back Side	1.026	0.374	1.400	N/A	N/A
	Left Side	/	0.374	0.374	N/A	N/A
	Right Side	0.647	/	0.647	N/A	N/A
	Top Side	0.014	0.374	0.388	N/A	N/A
	Bottom Side	0.176	/	0.176	N/A	N/A

Table 71: Simultaneous Tx Combination of LTE Band II and BT.

Test Position		Scaled or Estimated SAR _{Max}		1g-ΣSAR W/kg	SPLSR	Remark
		LTE Band VII	BT			
Body SAR	Back Side	0.975	0.374	1.349	N/A	N/A
	Left Side	/	0.374	0.374	N/A	N/A
	Right Side	1.392	/	1.392	N/A	N/A
	Top Side	0.039	0.374	0.413	N/A	N/A
	Bottom Side	0.316	/	0.316	N/A	N/A

Table 72: Simultaneous Tx Combination of LTE Band VII and BT.

7.3.4 SPLSR Evaluation Analysis

According to KDB447498 D01v05, When the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio(SPLSR).When the SAR to peak location ratio for each pair of antennas is ≤ 0.04 , simultaneous SAR evaluation is not required.

When SAR is measured for both antennas in the pair, the peak location separation distance is computed by the following formula:


$$\text{Distance}_{\text{Tx1-Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

$$\text{SPLS Ratio} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / R_i$$

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location should be translated onto the test device to determine the peak location separation for the antenna pair. The ERP location on the phantom is aligned with the ERP location on the handset, with 6 mm separation in the z coordinate due to the ear spacer. A measured peak location can be translated onto the handset, with respect to the ERP location, by ignoring the 6 mm offset in the z coordinate. The assumed peak location of the antenna with estimated SAR can also be determined with respect to the ERP location on the handset. The peak location separation distance is estimated by the x and y coordinates of the peaks, referenced to the ERP location. While flat phantoms are not expected to have these issues, the same peak translation approach should be applied to determine peak location separation.

- 1) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with GSM850 and WiFi 2.4G.

The Peak SAR location plot is as below:

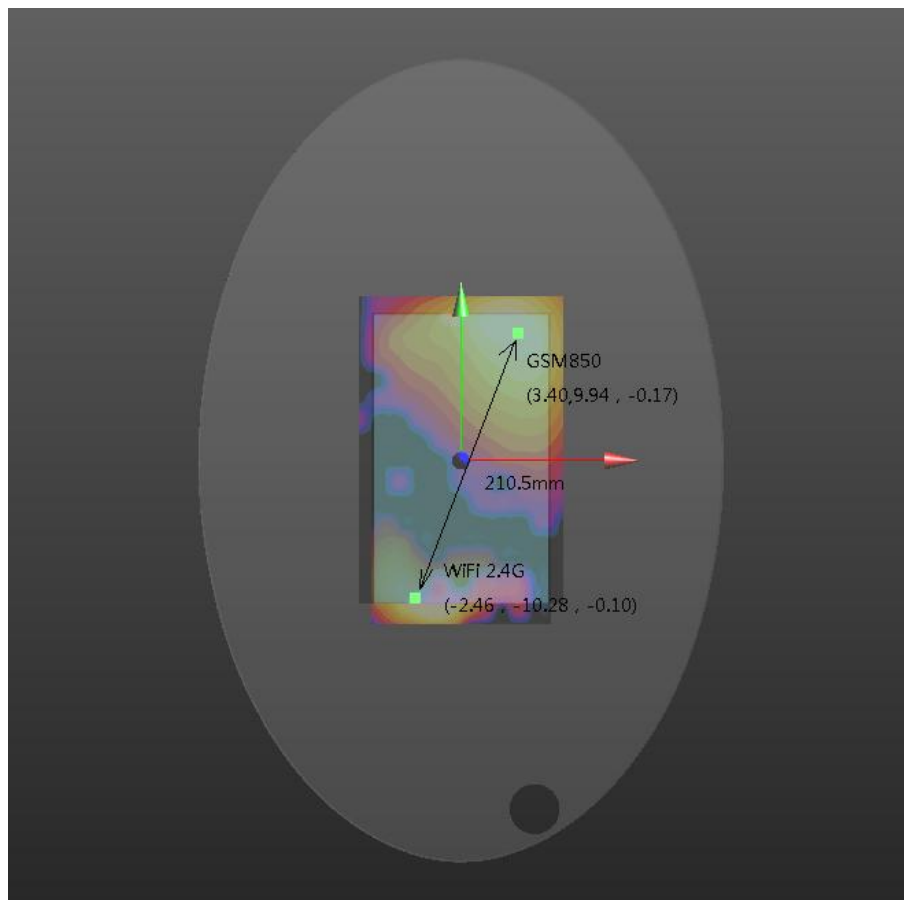


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.497	1.42	210.5	0.024	0.04	Not required

- 2) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with GSM1900 and WiFi 2.4G.

The Peak SAR location plot is as below:

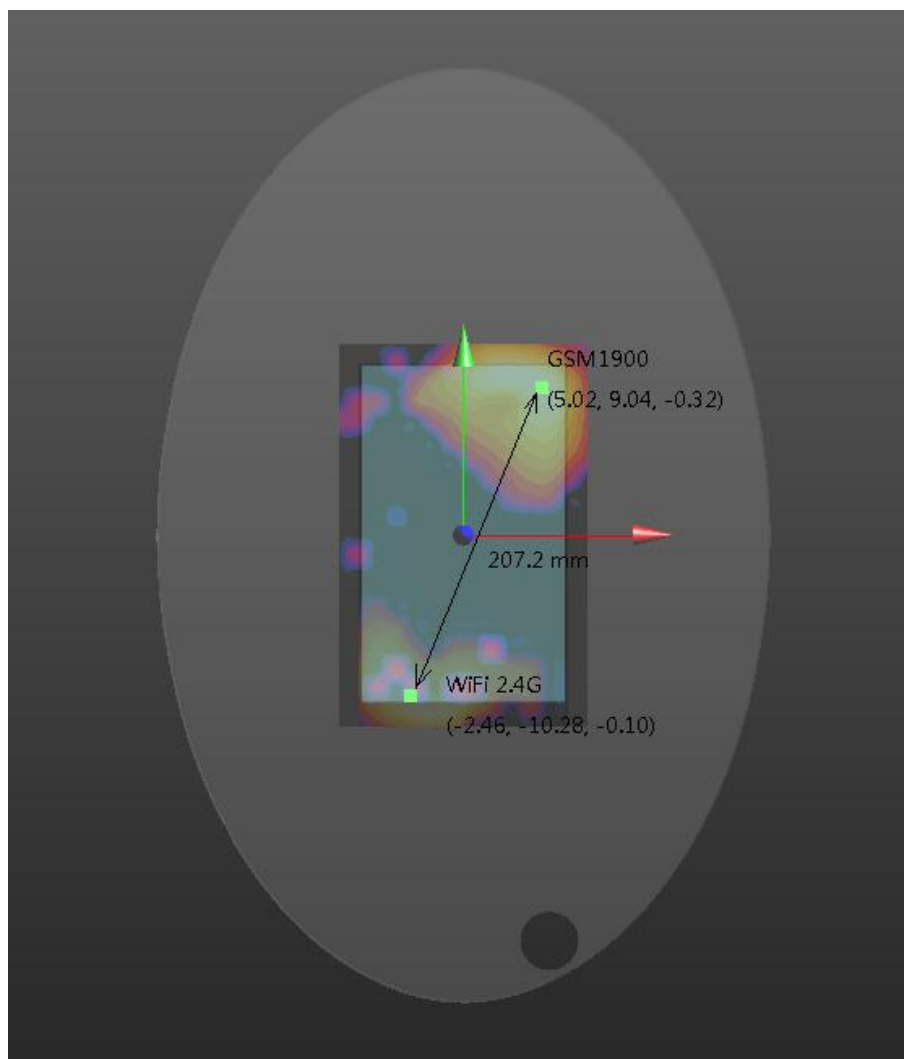


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.025	1.42	207.2	0.018	0.04	Not required

- 3) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with UMTS Band V and WiFi 2.4G.

The Peak SAR location plot is as below:

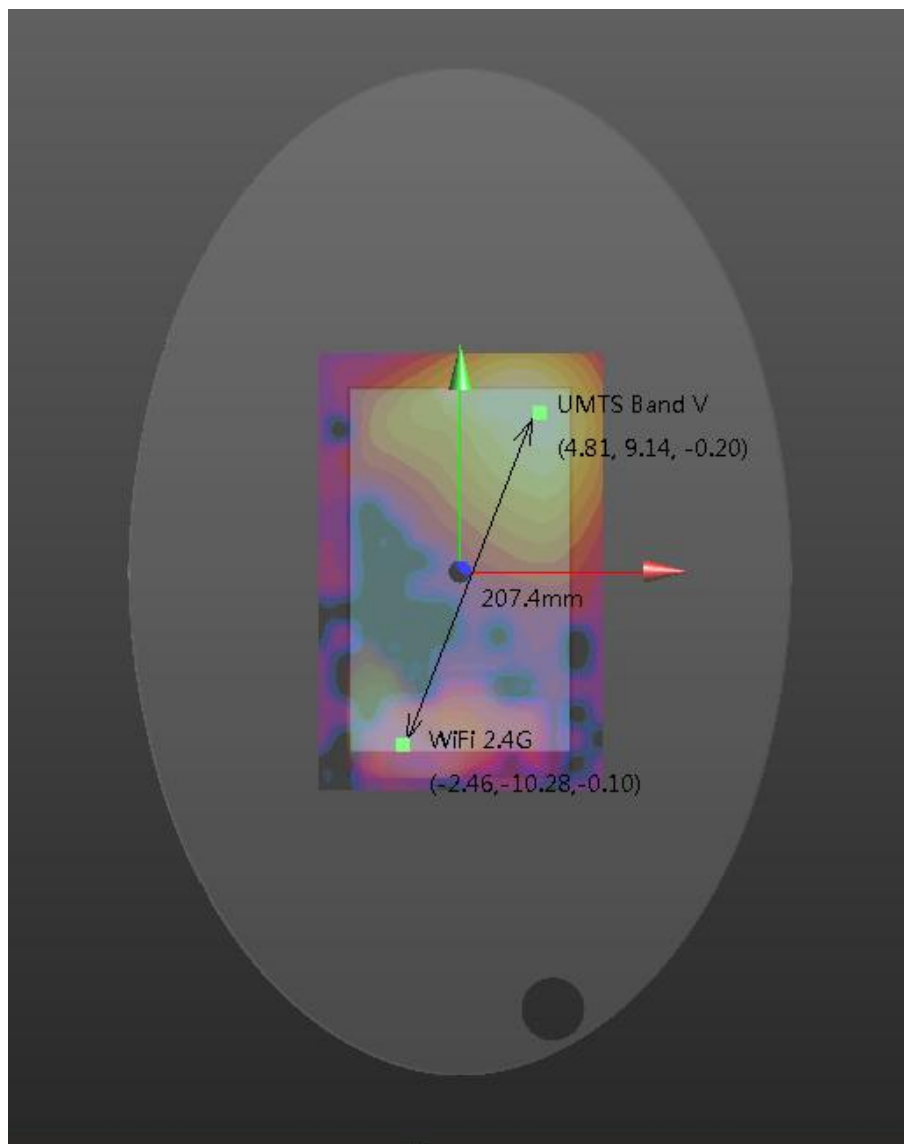


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.052	1.420	207.4	0.019	0.04	Not required

- 4) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with UMTS Band IV and WiFi 2.4G.

The Peak SAR location plot is as below:

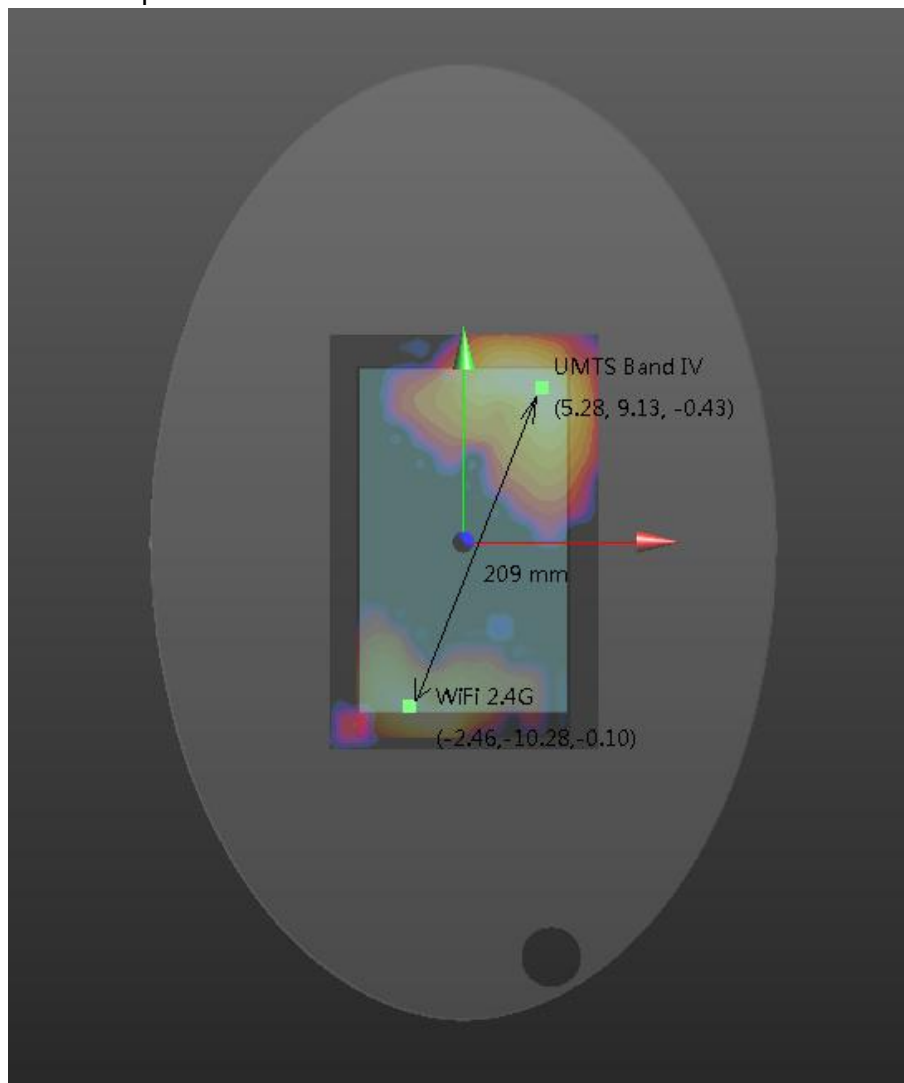


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.097	1.420	209	0.019	0.04	Not required

- 5) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with UMTS Band II and WiFi 2.4G.

The Peak SAR location plot is as below:

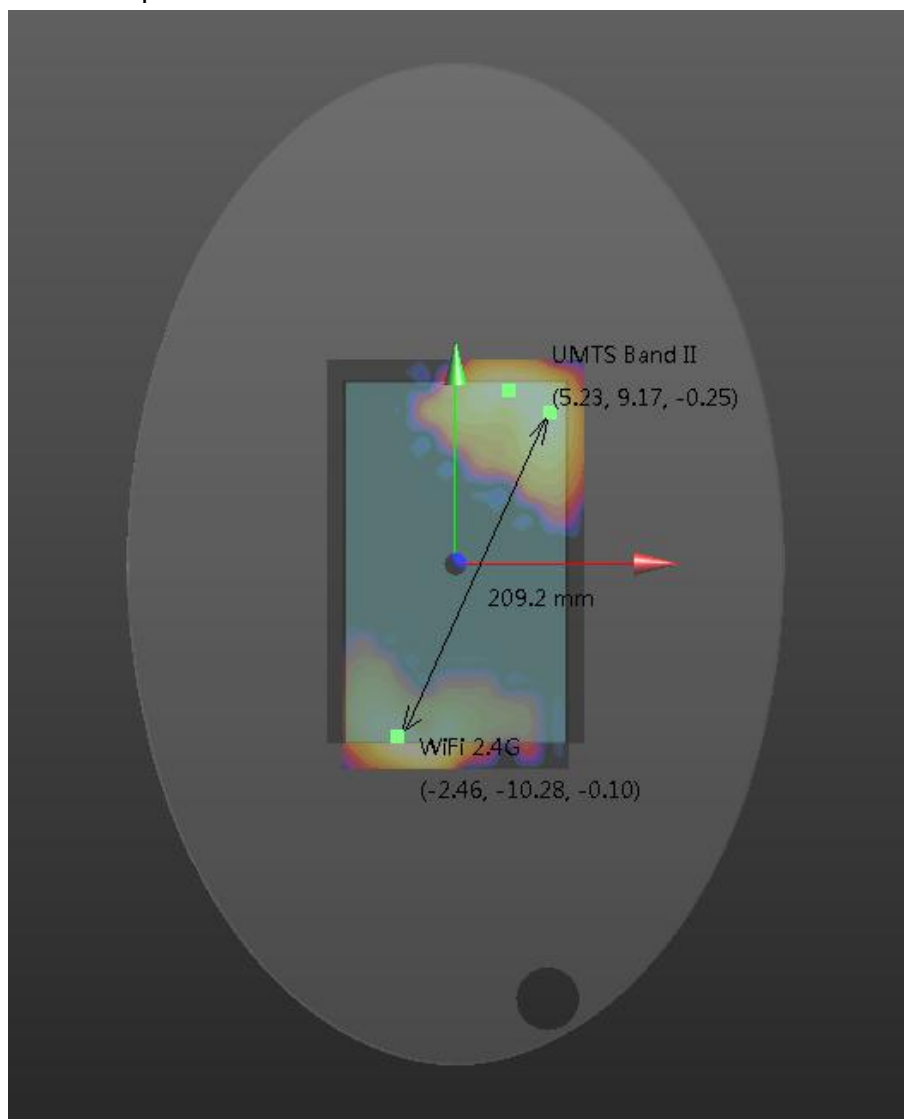


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.358	1.420	209.2	0.022	0.04	Not required

- 6) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with LTE Band IV and WiFi 2.4G.

The Peak SAR location plot is as below:

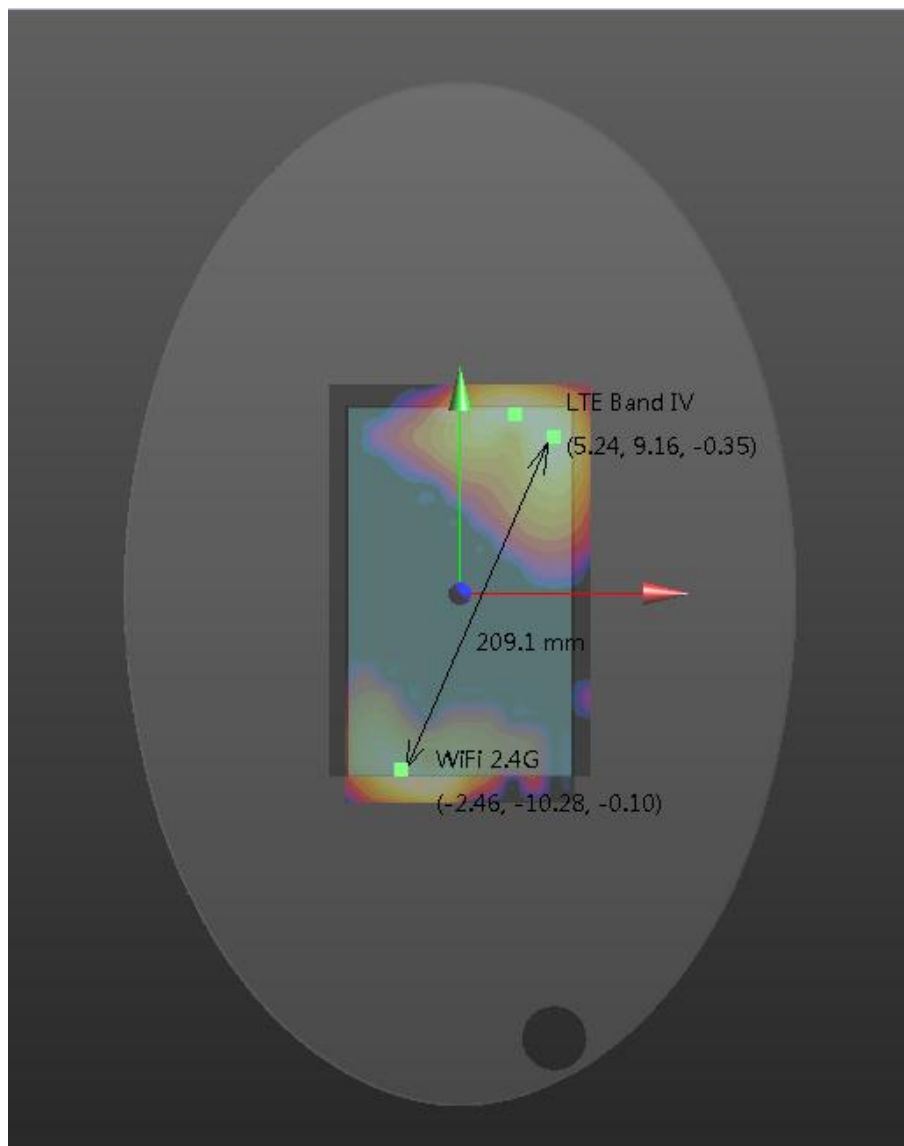


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.447	1.420	209.1	0.023	0.04	Not required

- 7) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with LTE Band II and WiFi 2.4G.

The Peak SAR location plot is as below:

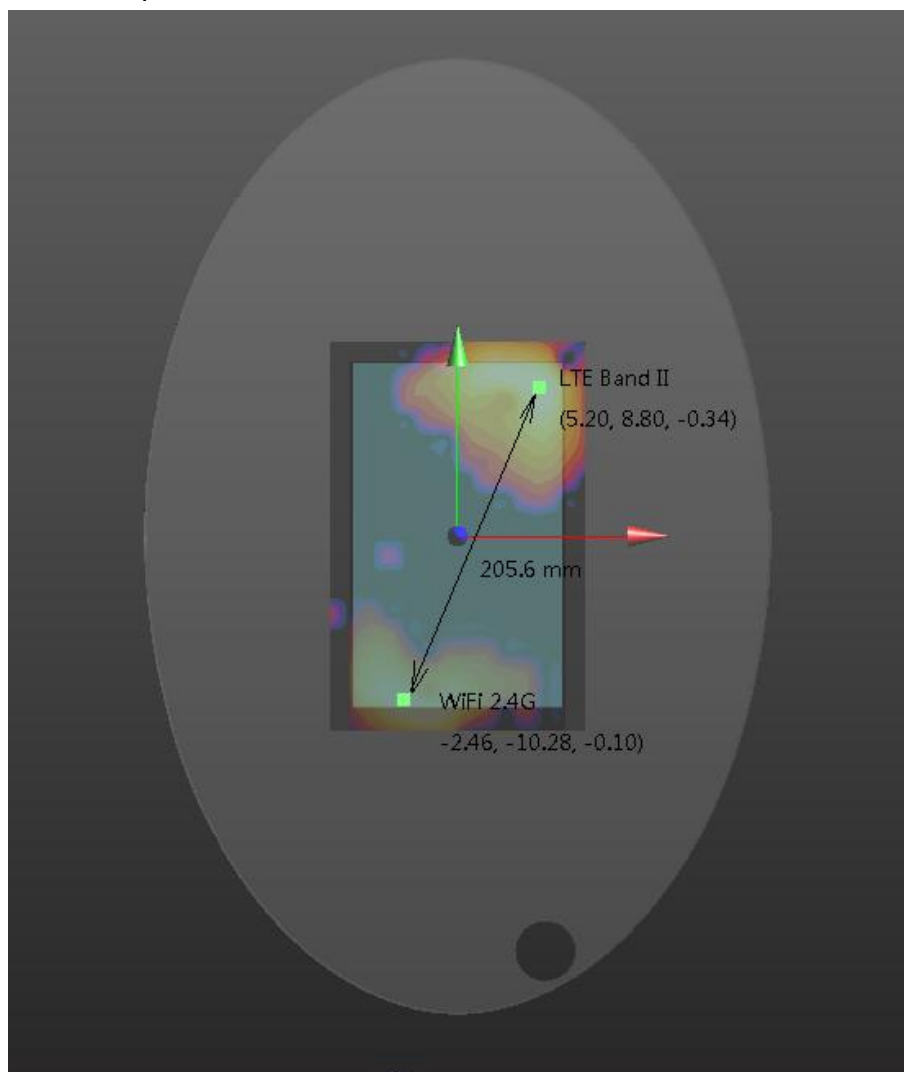


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.026	1.420	205.6	0.019	0.04	Not required

- 8) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with LTE Band VII and WiFi 2.4G.

The Peak SAR location plot is as below:

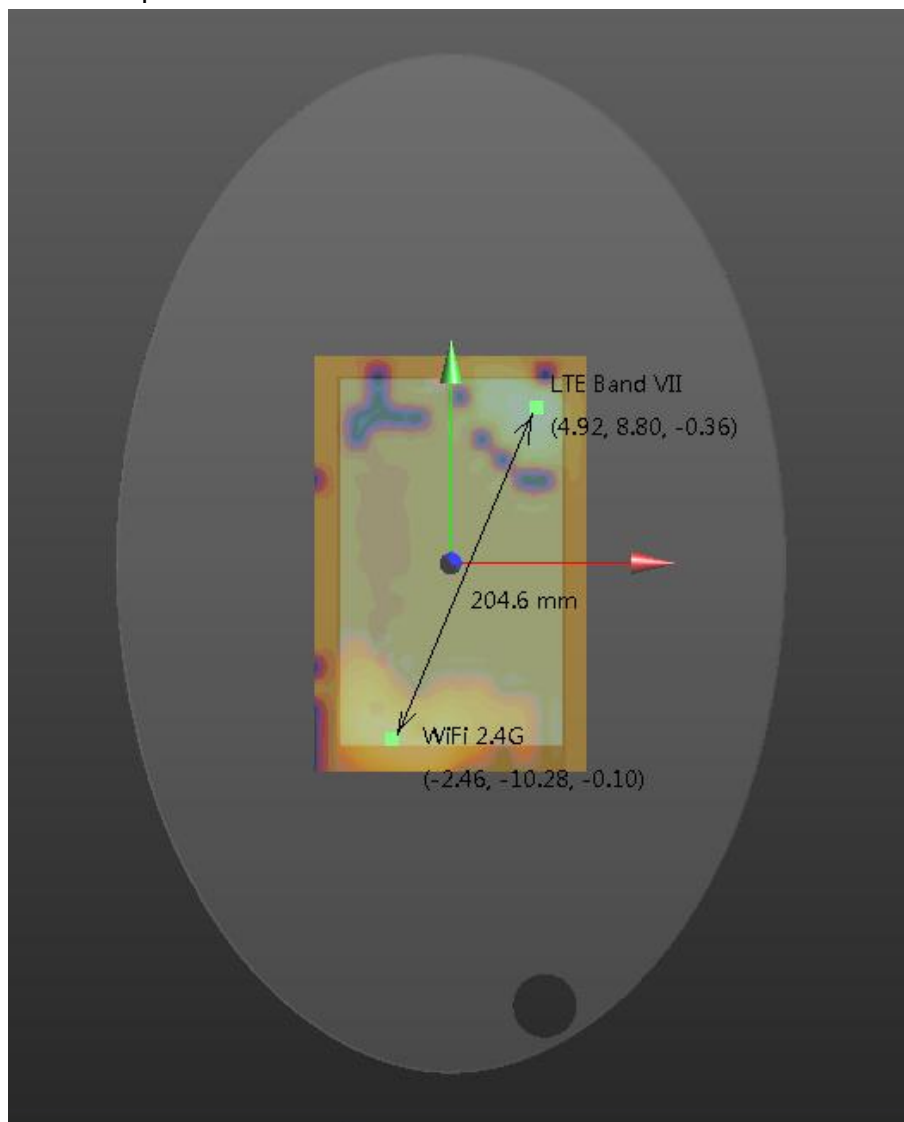


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	0.975	1.420	204.6	0.018	0.04	Not required

- 9) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with GSM850 and WiFi 5G.

The Peak SAR location plot is as below:

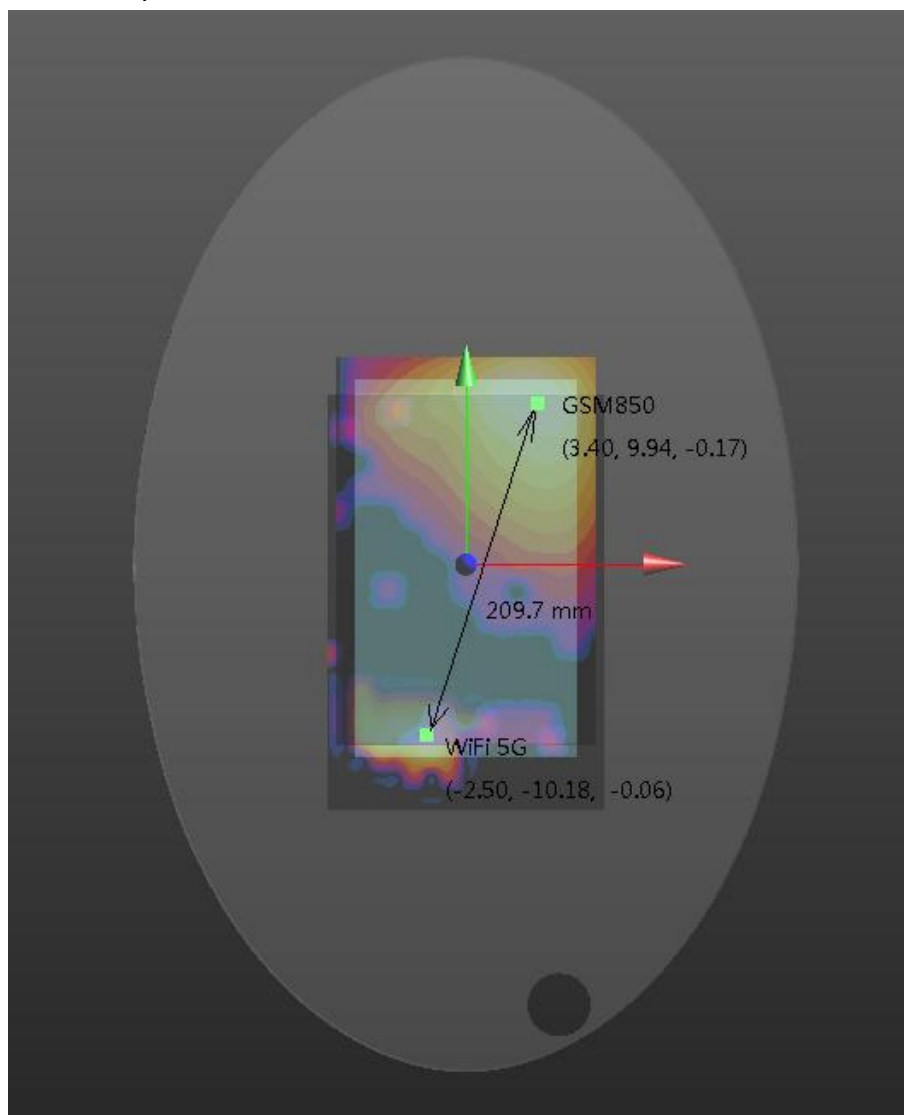


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.497	0.576	209.7	0.014	0.04	Not required

10) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with GSM1900 and WiFi 5G.

The Peak SAR location plot is as below:

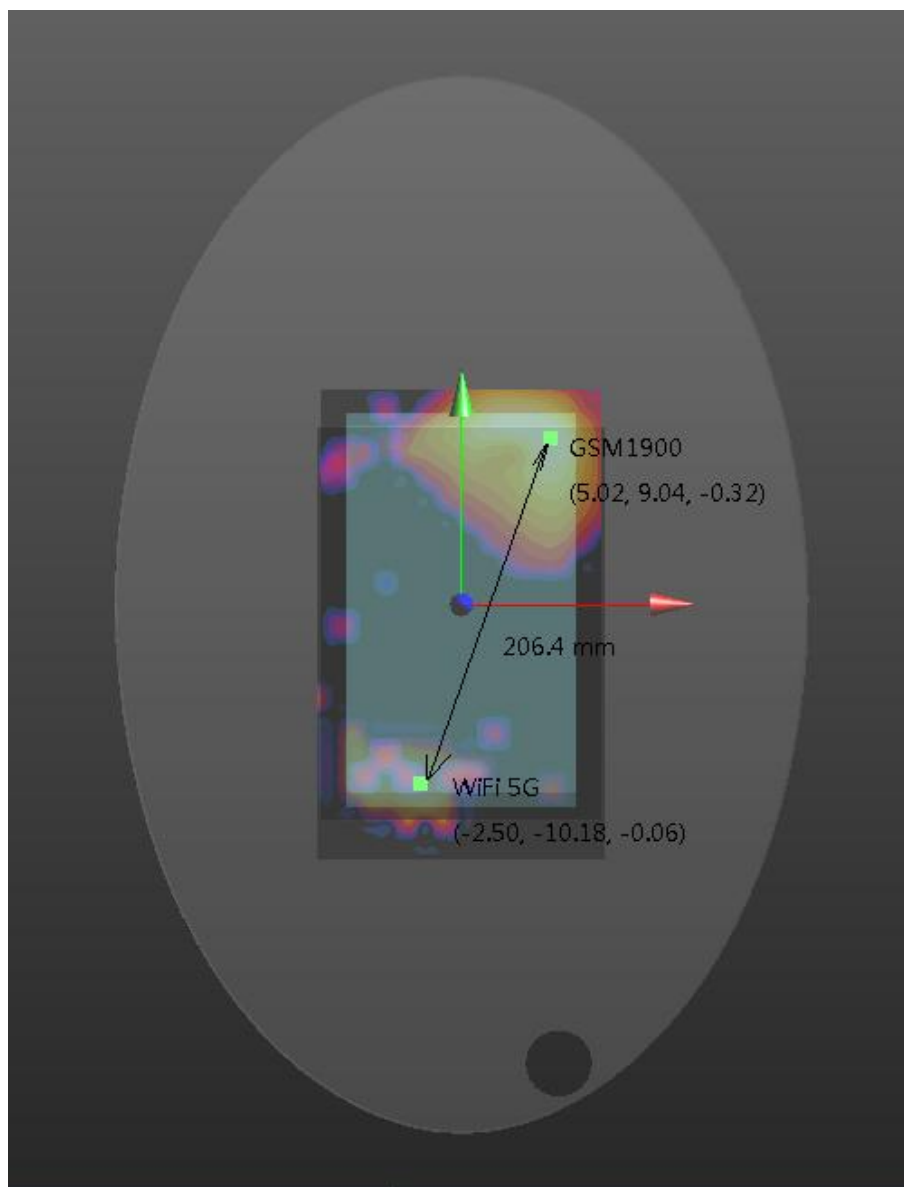


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.025	0.576	206.4	0.010	0.04	Not required

11) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with UMTS Band V and WiFi 5G.

The Peak SAR location plot is as below:

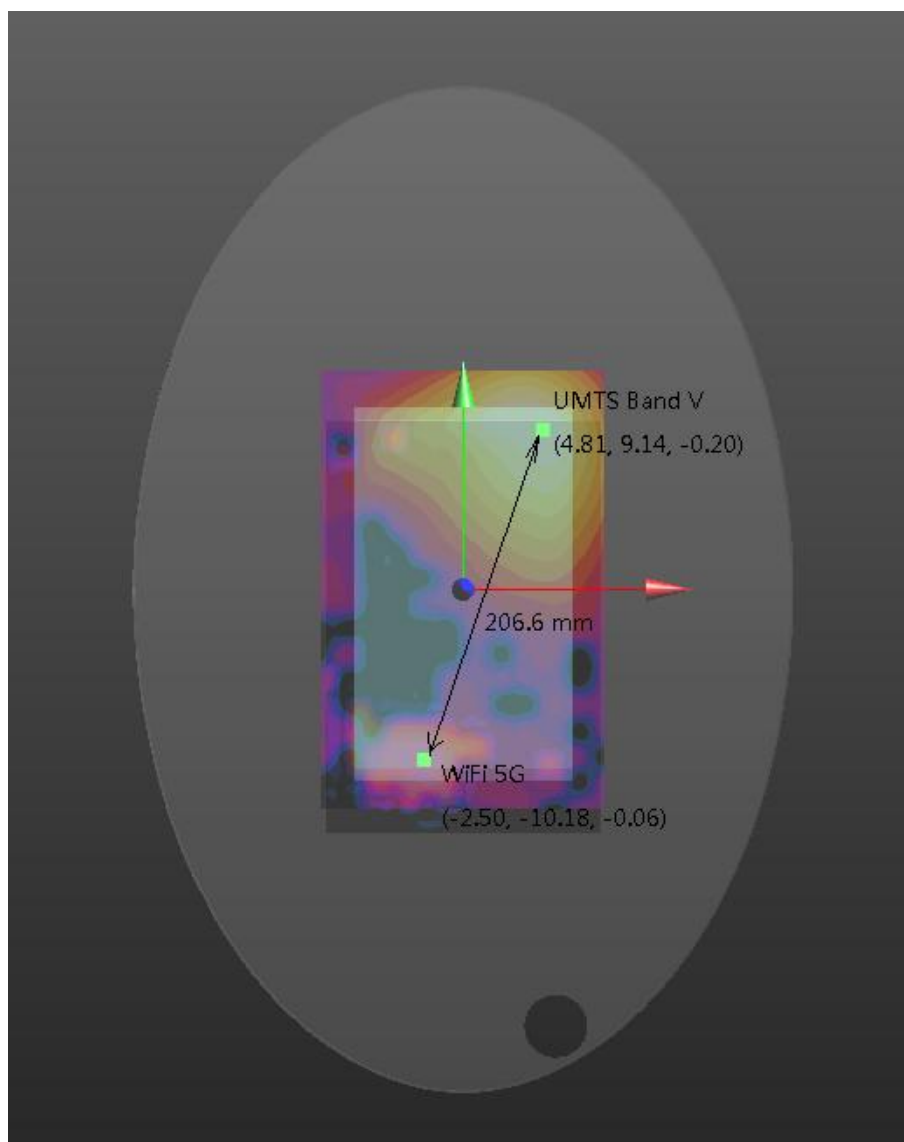


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.052	0.576	206.6	0.010	0.04	Not required

12) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with UMTS Band IV and WiFi 5G.

The Peak SAR location plot is as below:

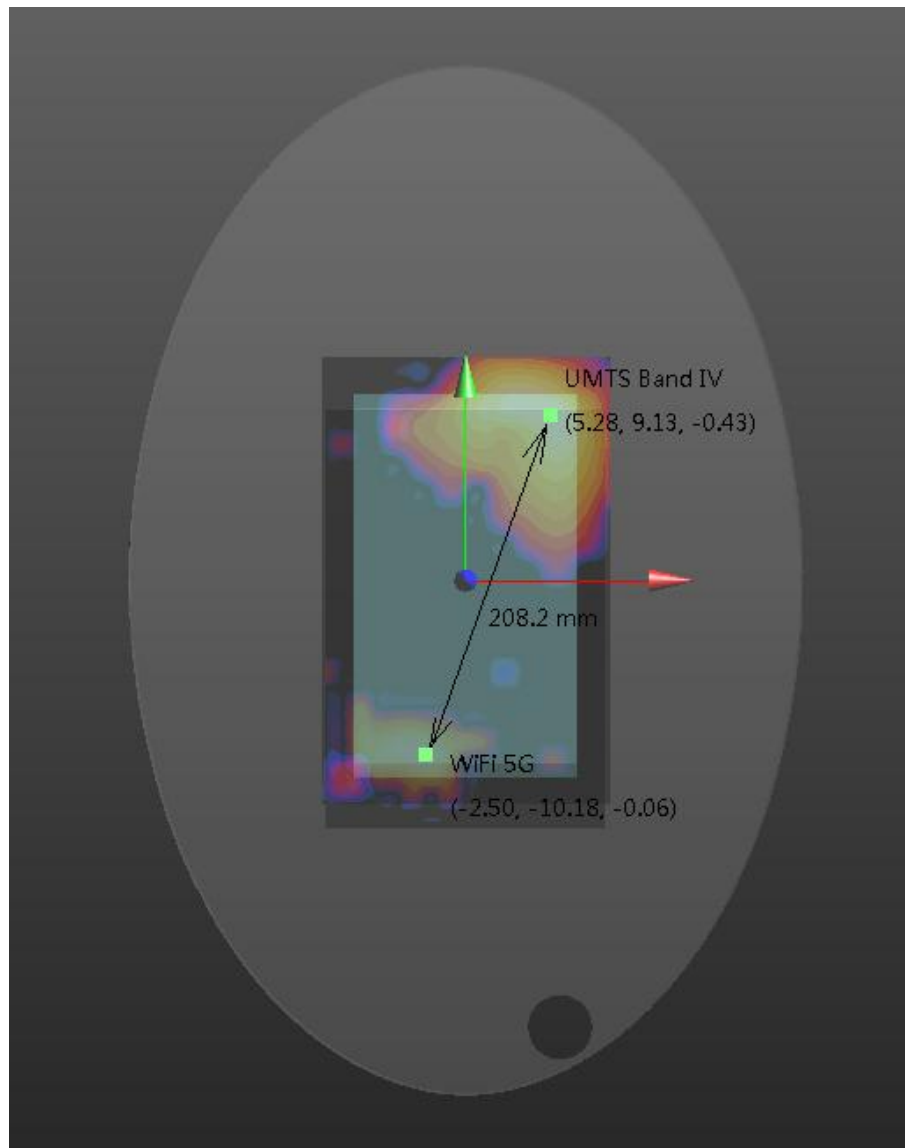


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.097	0.576	208.2	0.010	0.04	Not required

13) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with UMTS Band II and WiFi 5G.

The Peak SAR location plot is as below:

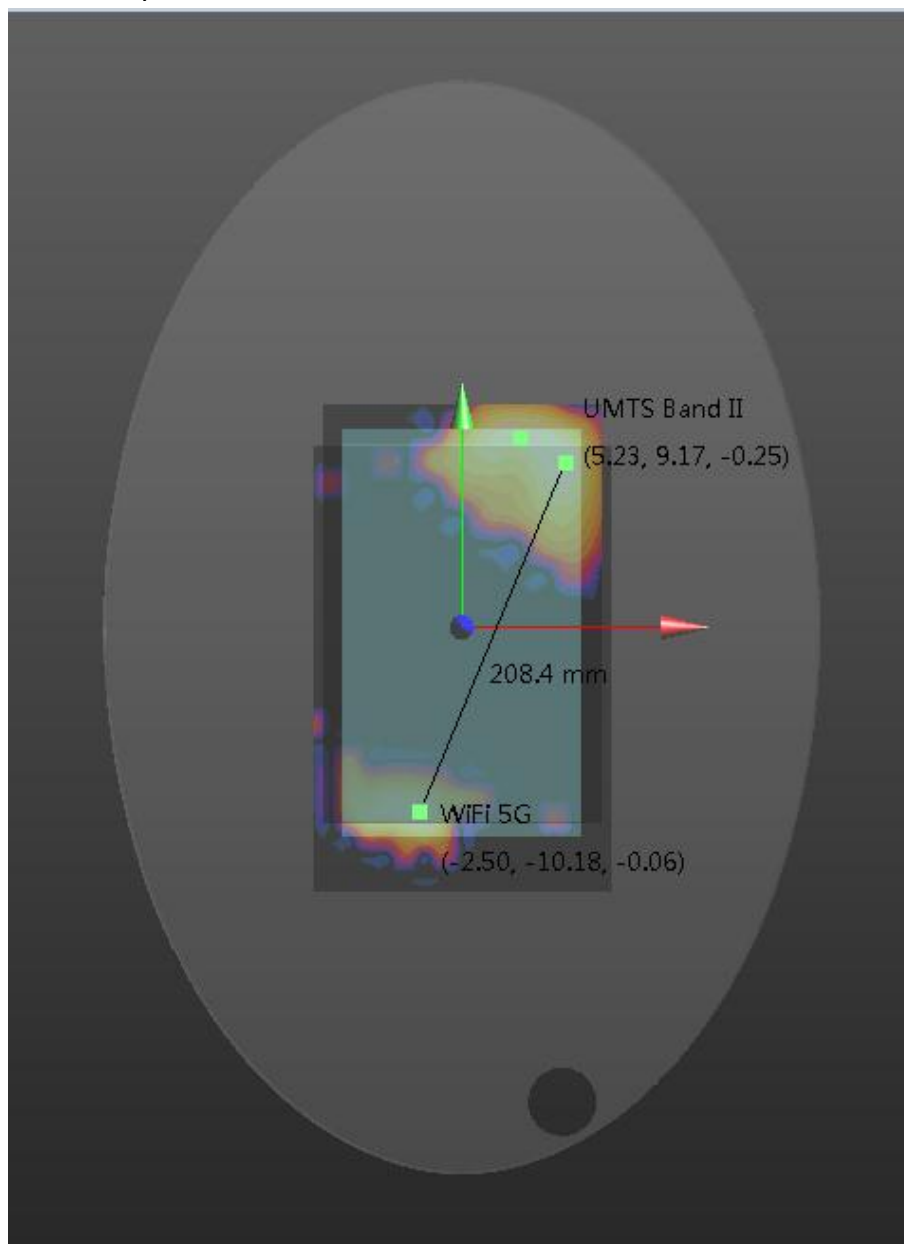


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.358	0.576	208.4	0.013	0.04	Not required

14) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with LTE Band IV and WiFi 5G.

The Peak SAR location plot is as below:

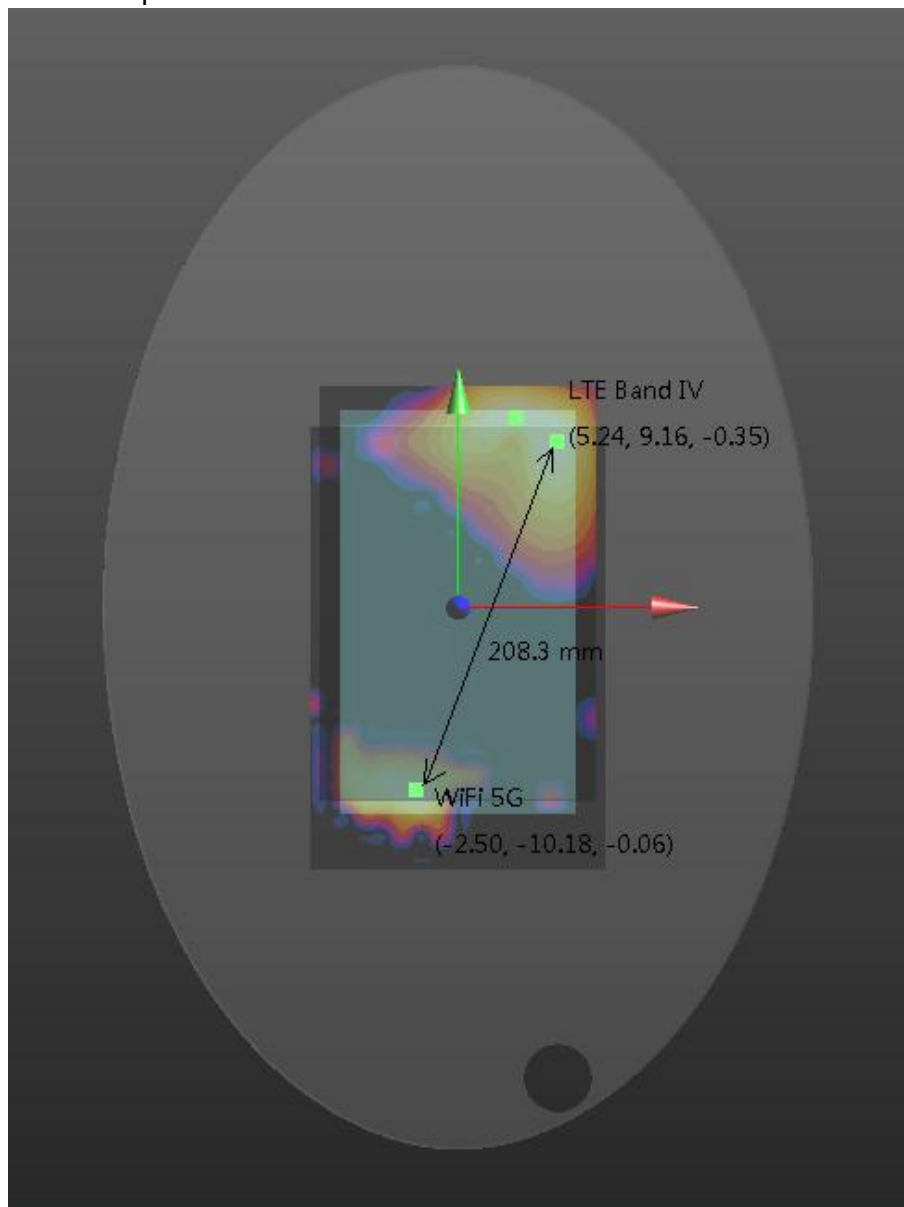


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.447	0.576	208.3	0.014	0.04	Not required

15) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with LTE Band II and WiFi 5G.


The Peak SAR location plot is as below:

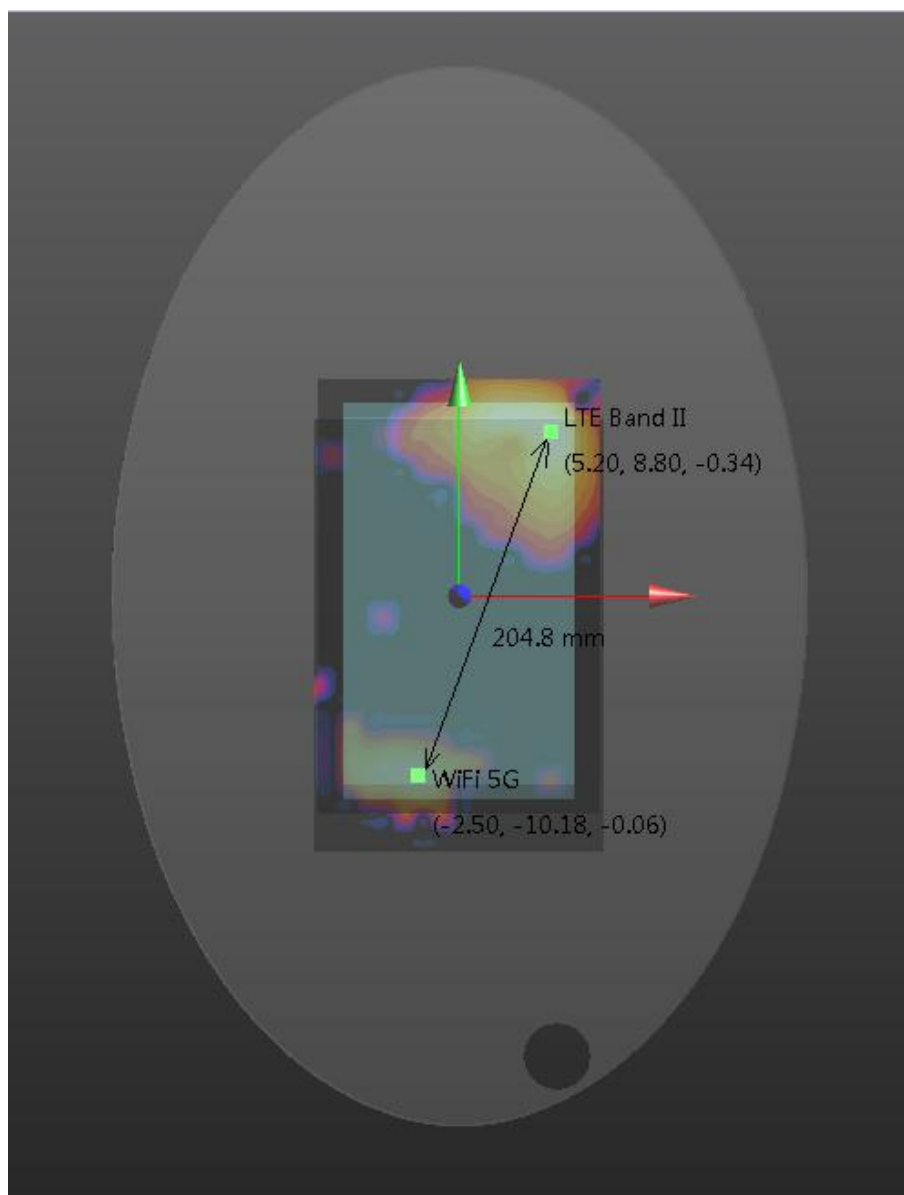

The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.026	0.576	204.8	0.010	0.04	Not required

- 16) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with GSM850 and BT.
The Peak SAR location plot is as below:

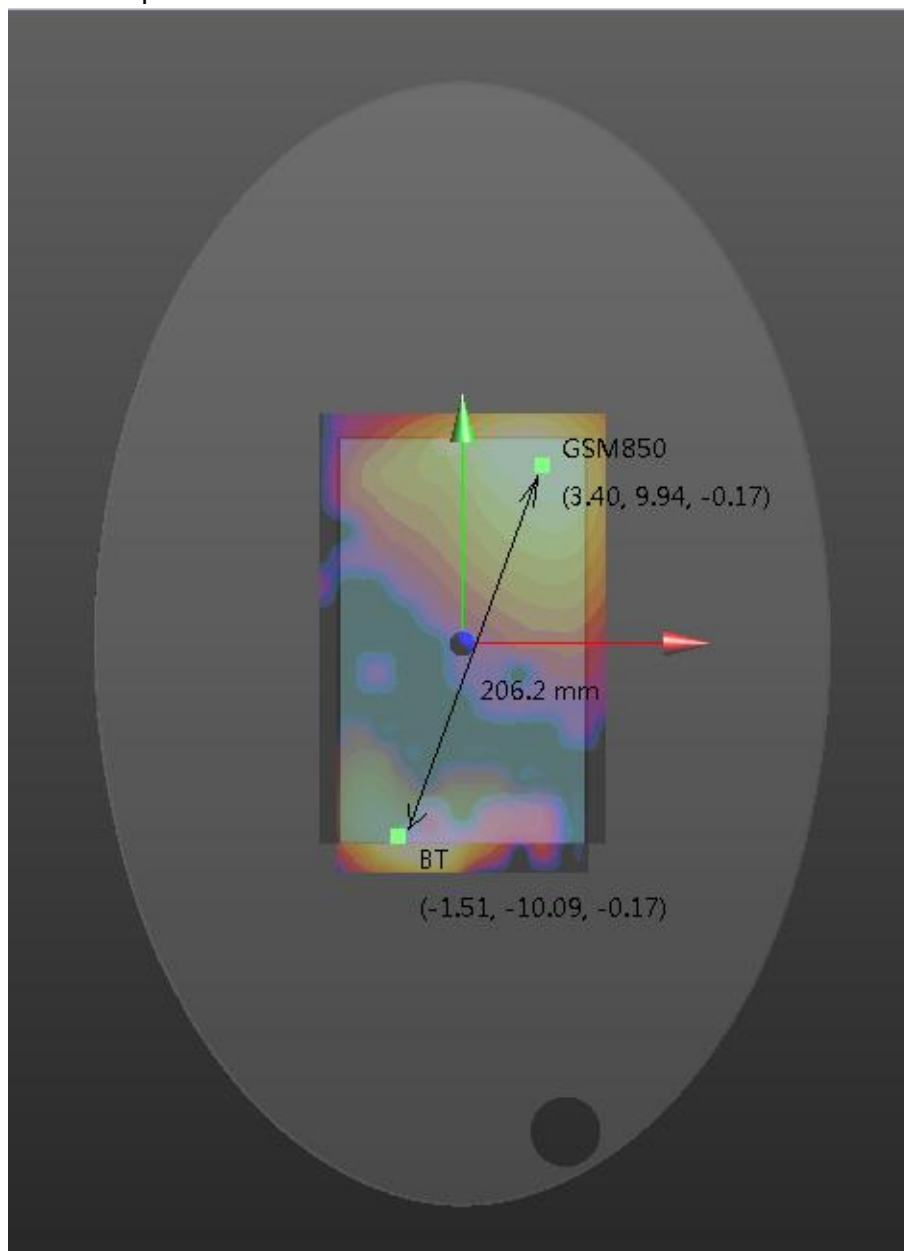


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.497	0.374	206.2	0.012	0.04	Not required

- 17) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with UMTS Band II and BT.

The Peak SAR location plot is as below:

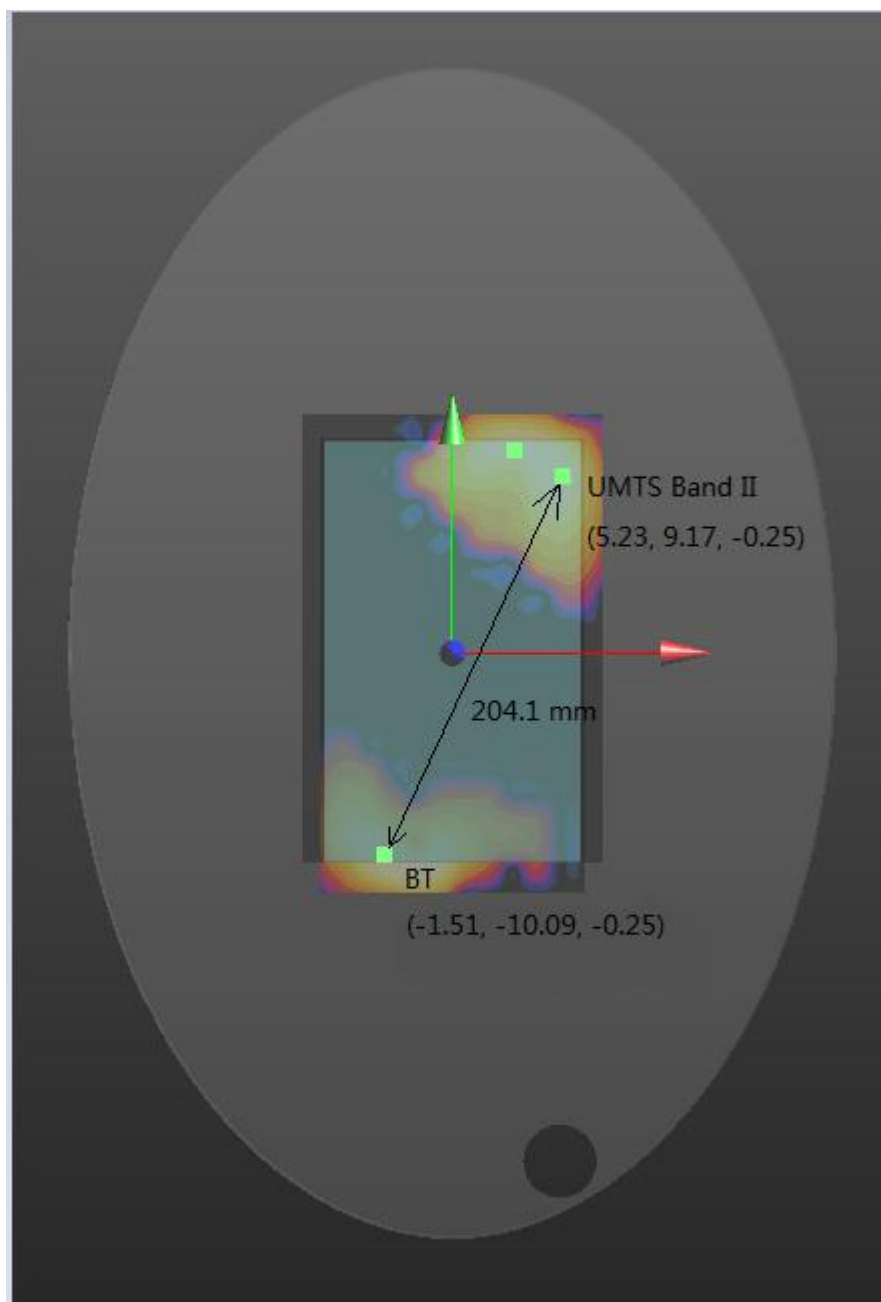


The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.358	0.374	204.1	0.011	0.04	Not required

18) The sum of aggregate 1g SAR was above 1.6W/Kg for Back side configuration with LTE Band IV and BT.

The Peak SAR location plot is as below:

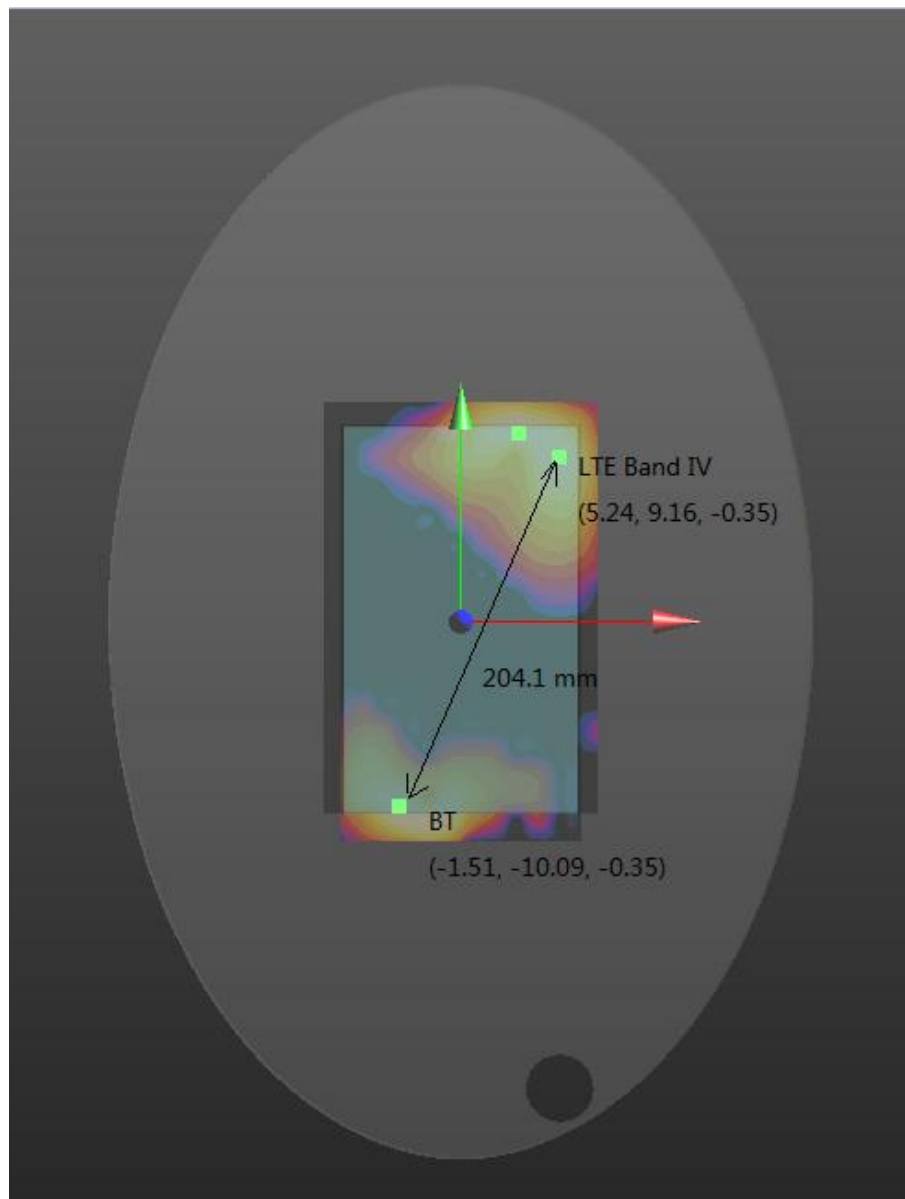

The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/kg)	SAR2 (W/kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back Side	1.447	0.374	204.1	0.012	0.04	Not required

Conclusion:

The above numeral summed SAR results and SPLSR analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01.



Appendix A. System Check Plots
(Pls See Appendix A.)

Appendix B. SAR Measurement Plots
(Pls See Appendix B.)

Appendix C. Calibration Certificate
(Pls See Appendix C.)

Appendix D. Photo documentation
(Pls See Appendix D.)

End