



**FCC PART 15
TEST REPORT
No. I15Z40276-SRD02**

for

Huawei Technologies Co.,Ltd

tablet

Model name: T1-A21w

With

FCC ID: QIST1-A21W

Hardware Version: SH1T1A21LM

Software Version: T1-A21wV100R001C001

Issued Date: 2015-03-24



Note:The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504 Email: ctl_terminals@catr.cn www.chinattl.com



CONTENTS

1.	TEST LATORATORY	5
1.1.	TESTING LOCATION	5
1.2.	PROJECT DATA	5
1.3.	SIGNATURE	5
2.	CLIENT INFORMATION	6
2.1.	APPLICANT INFORMATION	6
2.2.	MANUFACTURER INFORMATION.....	6
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)	7
3.1.	ABOUT EUT.....	7
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
3.4.	GENERAL DESCRIPTION	7
4.	REFERENCE DOCUMENTS	8
4.1.	DOCUMENTS SUPPLIED BY APPLICANT	8
4.2.	REFERENCE DOCUMENTS FOR TESTING.....	8
5.	LABORATORY ENVIRONMENT	8
6.	SUMMARY OF TEST RESULTS	9
6.1.	SUMMARY OF TEST RESULTS.....	9
6.2.	STATEMENTS.....	9
6.3.	TEST CONDITIONS.....	9
7.	TEST EQUIPMENTS UTILIZED	10
ANNEX A: MEASUREMENT RESULTS	11	
A.1.	MEASUREMENT METHOD	11
A.2.	MAXIMUM PEAK OUTPUT POWER	12
A.2.1	ANTENNA GAIN	12
A.2.2.	MAXIMUM PEAK OUTPUT POWER-CONDUCTED	12
A.2.3.	MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED.....	13
A.3.	PEAK POWER SPECTRAL DENSITY	14
A.4.	OCCUPIED 6dB BANDWIDTH	14
FIG. 1	OCCUPIED 6dB BANDWIDTH (802.11A, CH 149)	15
FIG. 2	OCCUPIED 6dB BANDWIDTH (802.11A, CH 157)	15
FIG. 3	OCCUPIED 6dB BANDWIDTH (802.11A, CH 165)	16
FIG. 4	OCCUPIED 6dB BANDWIDTH (802.11N-HT20, CH 149).....	16
FIG. 5	OCCUPIED 6dB BANDWIDTH (802.11N-HT20, CH 157).....	17
FIG. 6	OCCUPIED 6dB BANDWIDTH (802.11N-HT20, CH 165).....	17
FIG. 7	OCCUPIED 6dB BANDWIDTH (802.11N-HT40, CH 151).....	18
FIG. 8	OCCUPIED 6dB BANDWIDTH (802.11N-HT40, CH 159).....	18

A.5. UNDESIRABLE EMISSION	19
A.5.1 TRANSMITTER SPURIOUS EMISSION - CONDUCTED	19
FIG. 9 CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 30 MHz-1 GHz).....	21
FIG. 10 CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 1 GHz -12 GHz)	21
FIG. 11 CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 12 GHz-25 GHz).....	22
FIG. 12 CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 25 GHz-40 GHz).....	22
FIG. 13 CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 30 MHz-1 GHz).....	23
FIG. 14 CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 1 GHz -12 GHz)	23
FIG. 15 CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 12 GHz-25 GHz).....	24
FIG. 16 CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 25 GHz-40 GHz).....	24
FIG. 17 CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 30 MHz-1 GHz).....	25
FIG. 18 CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 1 GHz -12 GHz)	25
FIG. 19 CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 12 GHz-25 GHz).....	26
FIG. 20 CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 25 GHz-40 GHz).....	26
FIG. 21 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 30 MHz-1 GHz)	27
FIG. 22 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 1 GHz -12 GHz).....	27
FIG. 23 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 12 GHz-25 GHz).....	28
FIG. 24 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 25 GHz-40 GHz).....	28
FIG. 25 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 30 MHz-1 GHz)	29
FIG. 26 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 1 GHz -12 GHz).....	29
FIG. 27 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 12 GHz-25 GHz).....	30
FIG. 28 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 25 GHz-40 GHz).....	30
FIG. 29 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH165, 30 MHz-1 GHz)	31
FIG. 30 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH165, 1 GHz -12 GHz).....	31
FIG. 31 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH165, 12 GHz-25 GHz).....	32
FIG. 32 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH165, 25 GHz-40 GHz).....	32
FIG. 33 CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 30 MHz-1 GHz)	33
FIG. 34 CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 1 GHz -12 GHz).....	33
FIG. 35 CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 12 GHz-25 GHz).....	34
FIG. 36 CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 25 GHz-40 GHz).....	34
FIG. 37 CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 30 MHz-1 GHz)	35
FIG. 38 CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 1 GHz -12 GHz).....	35
FIG. 39 CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 12 GHz-25 GHz).....	36
FIG. 40 CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 25 GHz-40 GHz).....	36
A.5.2 TRANSMITTER SPURIOUS EMISSION - RADIATED	37
FIG. 41 RADIATED SPURIOUS EMISSION (802.11A, CH149, 1 GHz-6 GHz)	41
FIG. 42 RADIATED SPURIOUS EMISSION (802.11A, CH149, 6 GHz-18 GHz)	41
FIG. 43 RADIATED SPURIOUS EMISSION (802.11A, CH157, 30 MHz-1 GHz).....	42
FIG. 44 RADIATED SPURIOUS EMISSION (802.11A, CH157, 1 GHz-6 GHz)	42
FIG. 45 RADIATED SPURIOUS EMISSION (802.11A, CH157, 6 GHz-18 GHz)	43
FIG. 46 RADIATED SPURIOUS EMISSION (802.11A, CH157, 18 GHz-26.5 GHz).....	43
FIG. 47 RADIATED EMISSION: 802.11N, (802.11A, CH157, 26.5 GHz - 40 GHz).....	44
FIG. 48 RADIATED SPURIOUS EMISSION (802.11A, CH165, 1 GHz-6 GHz)	44
FIG. 49 RADIATED SPURIOUS EMISSION (802.11A, CH165, 6 GHz-18 GHz)	45

FIG. 50	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH149, 1 GHz-6 GHz).....	45
FIG. 51	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH149, 6 GHz-18 GHz).....	46
FIG. 52	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH157, 30 MHz-1 GHz).....	46
FIG. 53	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH157, 1 GHz-6 GHz).....	47
FIG. 54	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH157, 6 GHz-18 GHz).....	47
FIG. 55	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH157, 18 GHz-26.5 GHz).....	48
FIG. 56	RADIATED EMISSION: 802.11N, (802.11N-HT20, CH157, 26.5 GHz - 40 GHz)	48
FIG. 57	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH165, 1 GHz-6 GHz).....	49
FIG. 58	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH165, 6 GHz-18 GHz).....	49
FIG. 59	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH151, 30 MHz-1 GHz).....	50
FIG. 60	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH151, 1 GHz-6 GHz).....	50
FIG. 61	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH151, 6 GHz-18 GHz).....	51
FIG. 62	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH151, 18 GHz-26.5 GHz).....	51
FIG. 63	RADIATED EMISSION: 802.11N, (802.11N-HT40, CH151, 26.5 GHz - 40 GHz)	52
FIG. 64	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH159 1 GHz-6 GHz).....	52
FIG. 65	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH159, 6 GHz-18 GHz).....	53
A.6.	BAND EDGES COMPLIANCE	54
A6.1	BAND EDGES - CONDUCTED	54
FIG. 66	BAND EDGES (802.11A, 5745MHz)	54
FIG. 67	BAND EDGES (802.11A, 5825MHz)	55
FIG. 68	BAND EDGES (802.11N-HT20, 5745MHz).....	55
FIG. 69	BAND EDGES (802.11N-HT20, 5825MHz).....	56
FIG. 70	BAND EDGES (802.11N-HT40, 5755MHz).....	56
FIG. 71	BAND EDGES (802.11N-HT40, 5795MHz).....	57
A6.2	BAND EDGES - RADIATED.....	57
FIG. 72	BAND EDGES (802.11A, 5745MHz)	58
FIG. 73	BAND EDGES (802.11A, 5825MHz)	58
FIG. 74	BAND EDGES (802.11N-HT20, 5745MHz).....	59
FIG. 75	BAND EDGES (802.11N-HT20, 5825MHz).....	60
FIG. 76	BAND EDGES (802.11N-HT40, 5755MHz).....	60
FIG. 77	BAND EDGES (802.11N-HT40, 5795MHz).....	60
A.7.	AC POWERLINE CONDUCTED EMISSION	61
FIG. 78	AC POWERLINE CONDUCTED EMISSION-802.11A.....	62
FIG. 79	AC POWERLINE CONDUCTED EMISSION-IDLE.....	63
A.8.	SPURIOUS EMISSIONS RADIATED < 30MHz	64
FIG. 80	RADIATED SPURIOUS EMISSION (802.11A, CH157, 9 kHz ~30 MHz)	64
ANNEX B:	PHOTOGRAPHS OF THE TEST SET-UP	65

1. TEST LATORATORY

1.1. Testing Location

Location 1:CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Location 2:CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China100191

1.2. Project data


Testing Start Date: 2015-02-02

Testing End Date: 2015-02-11


1.3. Signature



Xu Zhongfei
(Prepared this test report)



Li Zhibin
(Reviewed this test report)



Lv Songdong
(Approved this test report)



2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: Huawei Technologies Co.,Ltd
Address /Post: Administration Building, Headquarters of Huawei Technologies Co.,
Ltd., Bantian, Longgang District Shenzhen China
Contact Person: jiangpei
Telephone: 027-59675620
Fax: 027-59675620

2.2. Manufacturer Information

Company Name: Huawei Technologies Co.,Ltd
Address /Post: Administration Building, Headquarters of Huawei Technologies Co.,
Ltd., Bantian, Longgang District Shenzhen China
Contact Person: jiangpei
Telephone: 027-59675620
Fax: 027-59675620

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)

3.1. About EUT

Description	tablet
Model name	T1-A21w
FCC ID	QIST1-A21W
WLAN Frequency Range	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Extreme Temperature	-20/+55°C
Extreme vol. Limits	3.5VDC to 4.25VDC (nominal: 3.8VDC)

Note: Photographs of EUT are shown in ANNEX C of this test report. Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT5	66Y0115120000171	SH1T1A21LM	T1-A21wV100R001C001
EUT7	66Y0115120000186	SH1T1A21LM	T1-A21wV100R001C001

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1	Battery	/	/
AE2	Dummy battery	/	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

Equipment Under Test (EUT) is a model of tablet with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.



4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices	June 2014
ANSI C63.10	Subpart E-Unlicensed National Information Infrastructure Devices Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
KDB789033 D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E	June 2014

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	P
Peak Power Spectral Density	15.407 (a)	/	P
Occupied 6dB Bandwidth	15. 407 (e)	/	P
Band Edges Compliance	15. 407 (b)	/	P
Transmitter Spurious Emission - Conducted	15.407(b)	/	P
Transmitter Spurious Emission - Radiated	15. 407 (b)	/	P
AC Powerline Conducted Emission	15. 407 (b)	/	P
Transmitter Spurious Emission - Radiated < 30MHz	15. 407 (b)	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases requested by the client/matrix manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.8V
Humidity	44%

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	2014-07-08	2015-07-07
2	Test Receiver	ESS	847151/015	Rohde & Schwarz	2014-11-29	2015-11-28
3	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	2014-4-15	2015-4-14
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system


No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	2014-11-6	2015-11-5
2	BiLog Antenna	VULB9163	9163-514	Schwarzbeck	2012-11-11	2015-11-10
3	Dual-Ridge Waveguide Horn Antenna	3117	00119024	ETS-Lindgren	2012-4-20	2015-4-19
4	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2012-7-1	2015-06-30
5	Loop antenna	HFH2-Z2	829324/007	Rohde & Schwarz	2012-12-21	2015-12-20
6	Semi-anechoic chamber	/	CT000332-1074	Frankonia German	/	/

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

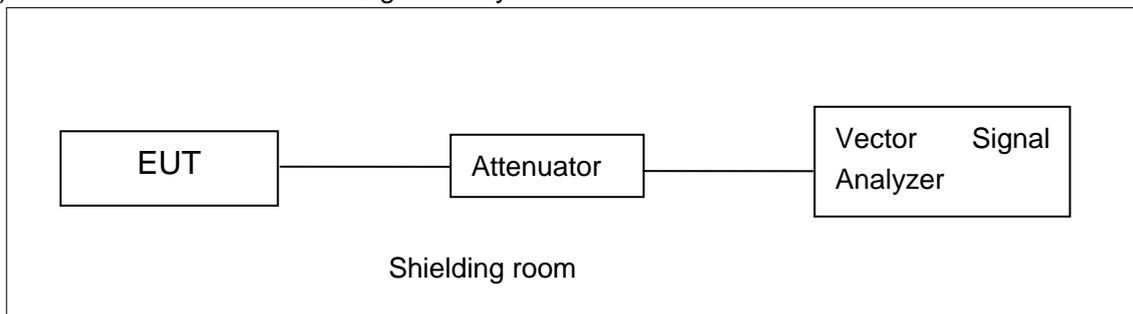


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

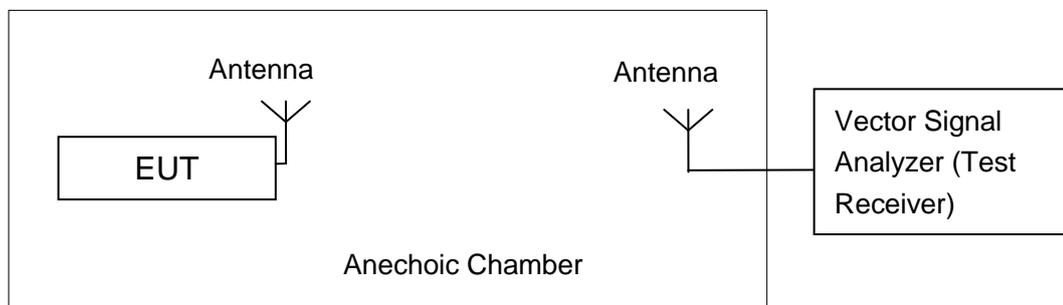

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

A.2. Maximum Peak Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

A.2.1 Antenna Gain

Antenna gain is 4.1 dBi and the value is supplied by the applicant or manufacturer.

A.2.2. Maximum Peak Output Power-conducted

Measurement Results:

802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	19.32	/	/
	9	19.27	/	/
	12	18.94	/	/
	18	18.98	/	/
	24	19.36	18.78	18.61
	36	19.25	/	/
	48	19.33	/	/
	54	19.29	/	/

The data rate 24Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n (20MHz)	MCS0	19.36	/	/
	MCS1	19.11	/	/
	MCS2	19.02	/	/
	MCS3	19.48	18.86	18.67
	MCS4	19.21	/	/
	MCS5	19.24	/	/
	MCS6	19.28	/	/
	MCS7	19.24	/	/

The data rate MCS3 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n (40MHz)	MCS0	19.31	18.84
	MCS1	19.07	/
	MCS2	18.81	/
	MCS3	19.22	/
	MCS4	19.11	/
	MCS5	19.07	/
	MCS6	19.05	/
	MCS7	19.08	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

Conclusion: PASS

A.2.3. Maximum Average Output Power-Conducted

Method of Measurement: See KDB789033 D02-clause E.2.b Method SA-1

802.11a mode

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	9.95	9.34	9.14

802.11n-HT20 mode

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n (20MHz)	9.97	9.35	9.17

802.11n-HT40 mode

Mode	Test Result (dBm)	
	5755MHz (Ch151)	5795MHz (Ch159)
802.11n (40MHz)	9.40	9.05

Conclusion: PASS

A.3. Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to KDB789033 D02

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:

Mode	Channel	Power Spectral Density (dBm/500kHz)	Conclusion
802.11a	149	6.36	P
	157	5.68	P
	165	5.88	P
802.11n HT20	149	6.27	P
	157	5.16	P
	165	5.01	P
802.11n HT40	151	2.79	P
	159	2.95	P

Conclusion: PASS

A.4. Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15. 407(e)	≥ 500

The measurement is made according to KDB789033 D02 .

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Channel	Occupied 6dB Bandwidth (kHz)		conclusion
802.11a	149	Fig.1	16350	P
	157	Fig.2	16350	P
	165	Fig.3	16350	P
802.11n HT20	149	Fig.4	17550	P
	157	Fig.5	17600	P
	165	Fig.6	17550	P
802.11n HT40	151	Fig.7	35120	P
	159	Fig.8	35200	P

Conclusion: PASS
Test graphs as below:

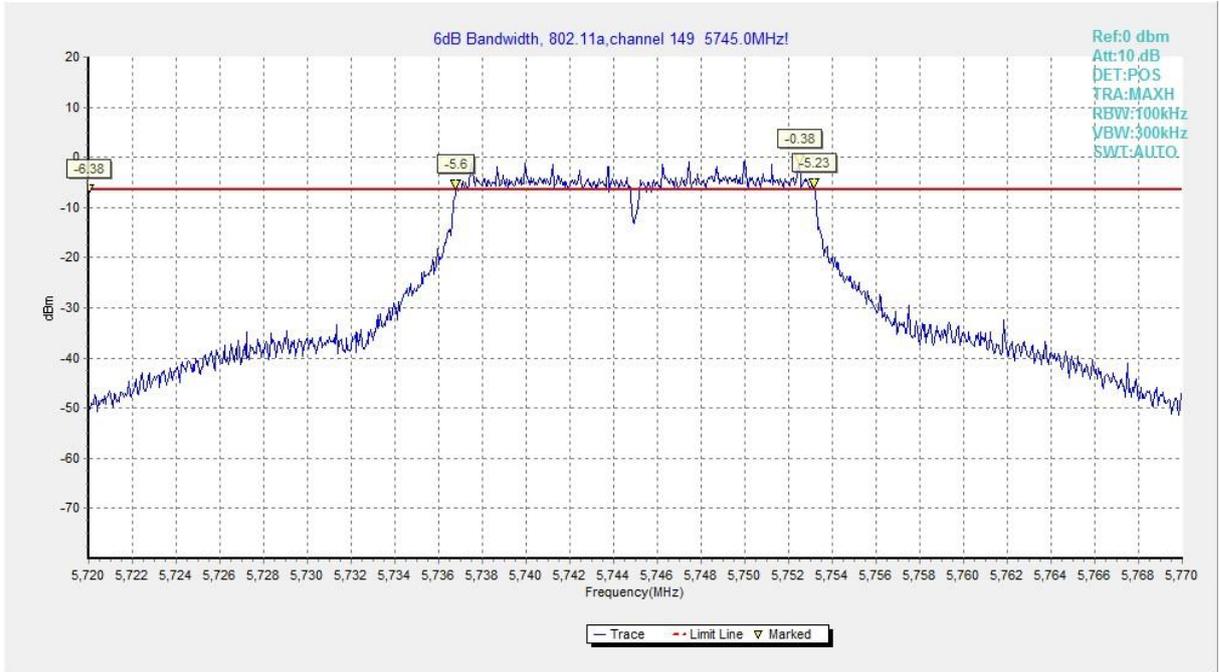


Fig. 1 Occupied 6dB Bandwidth (802.11a, Ch 149)

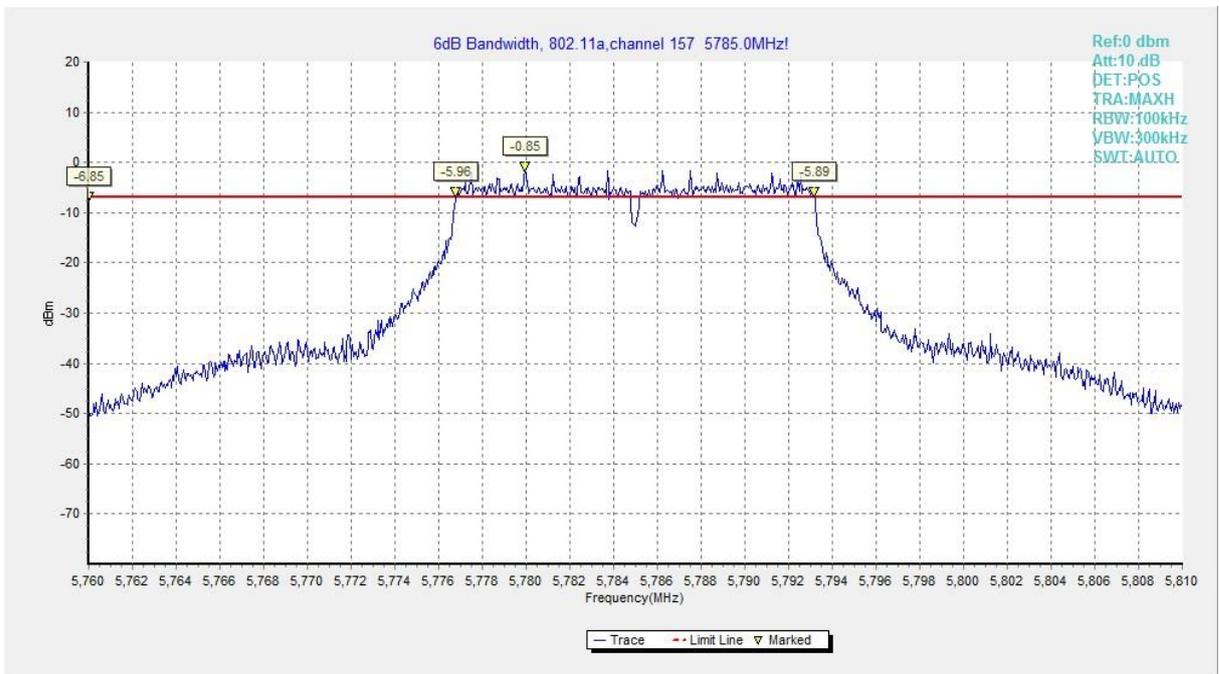


Fig. 2 Occupied 6dB Bandwidth (802.11a, Ch 157)

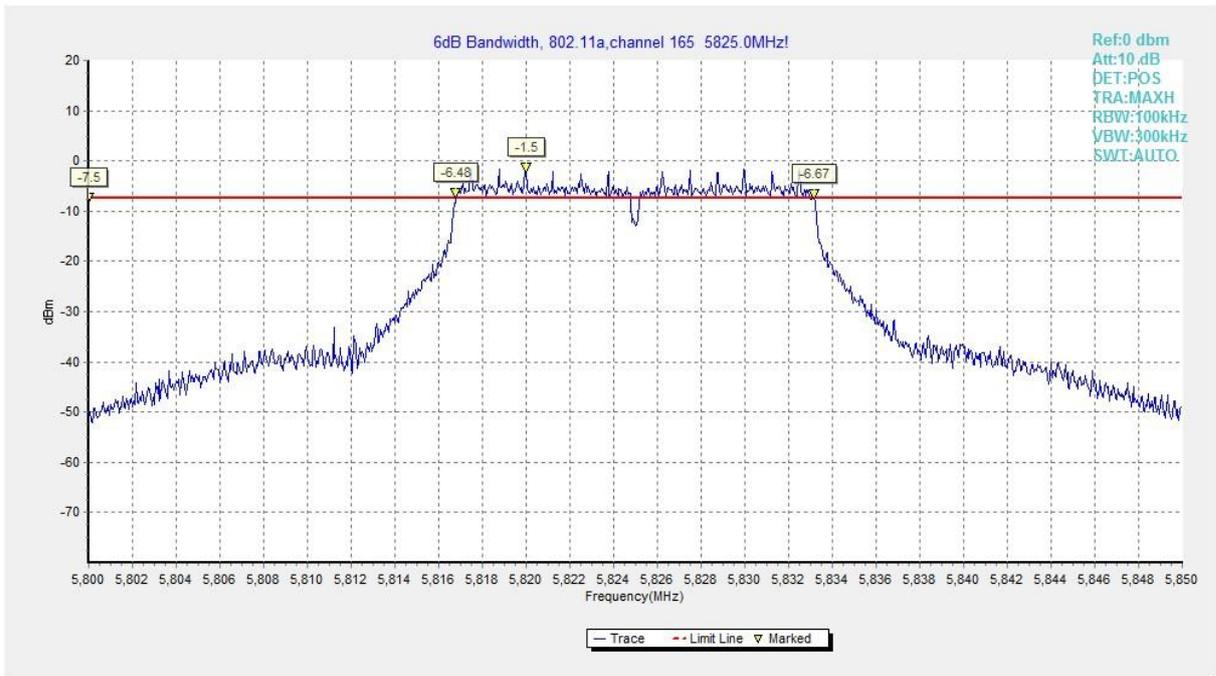


Fig. 3 Occupied 6dB Bandwidth (802.11a, Ch 165)

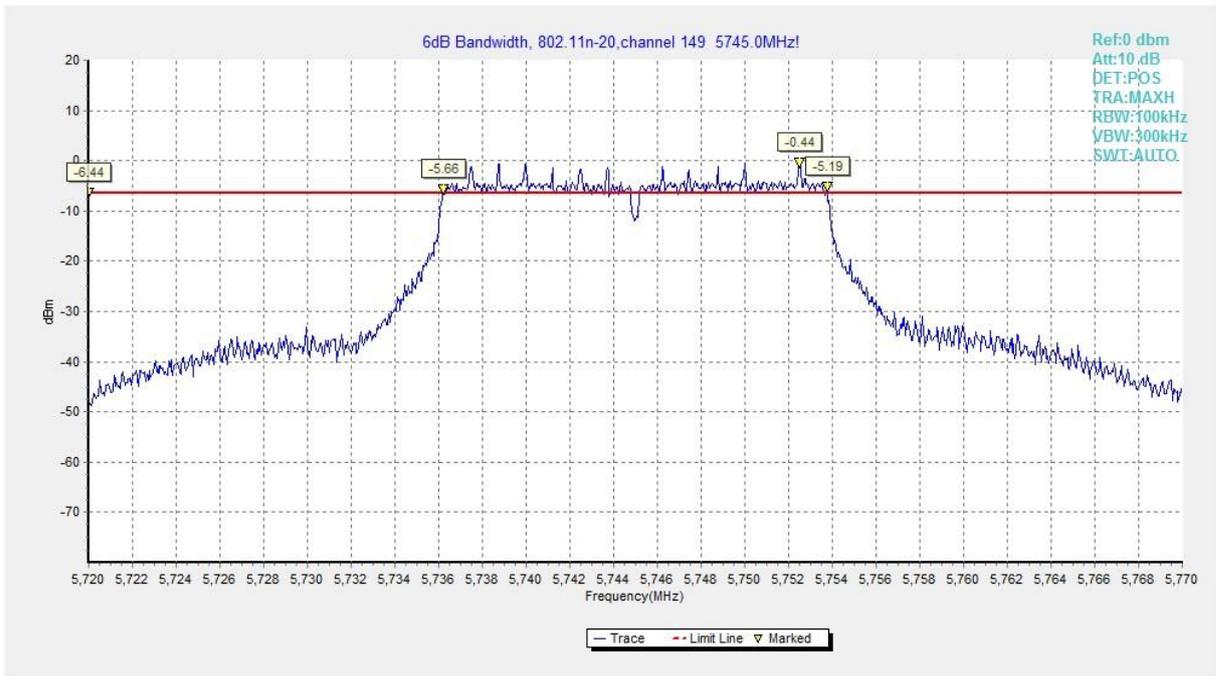


Fig. 4 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)

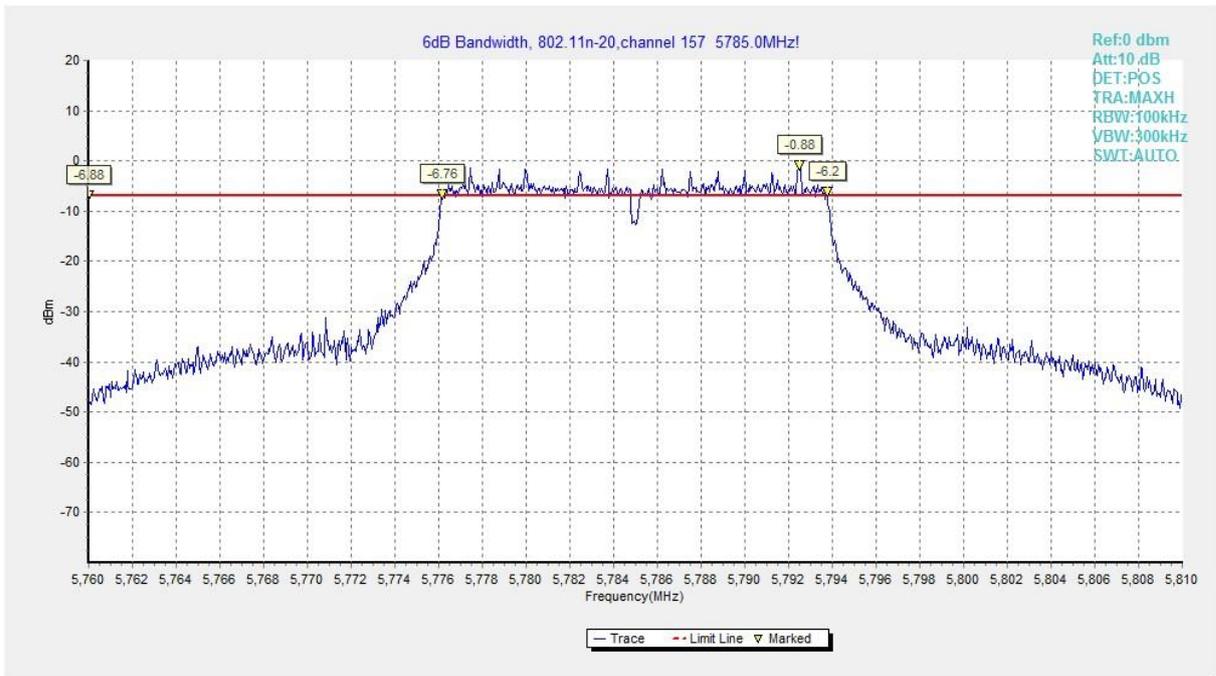


Fig. 5 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)

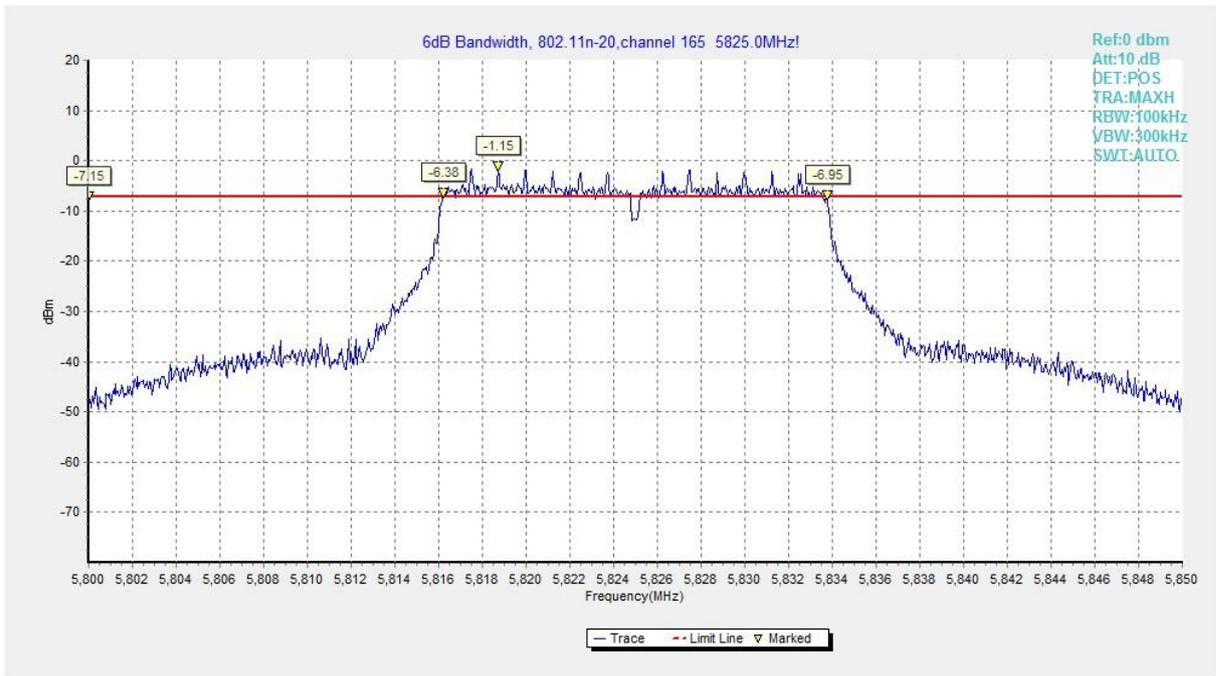


Fig. 6 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)

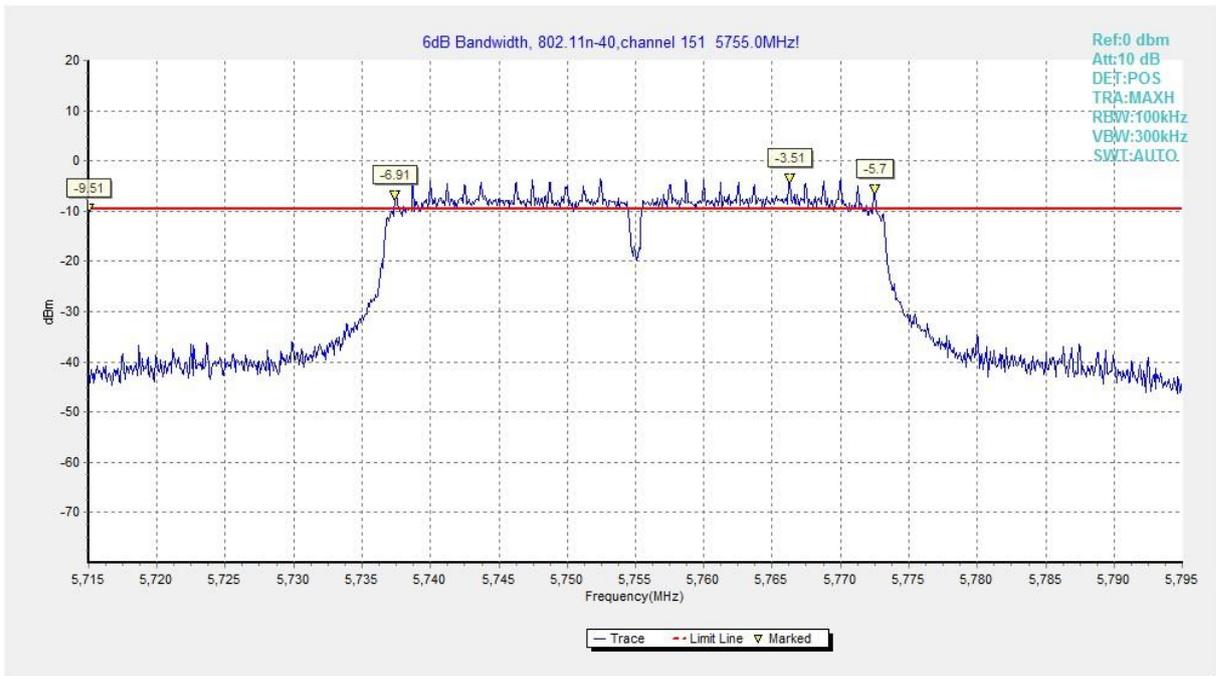


Fig. 7 Occupied 6dB Bandwidth (802.11n-HT40, Ch 151)

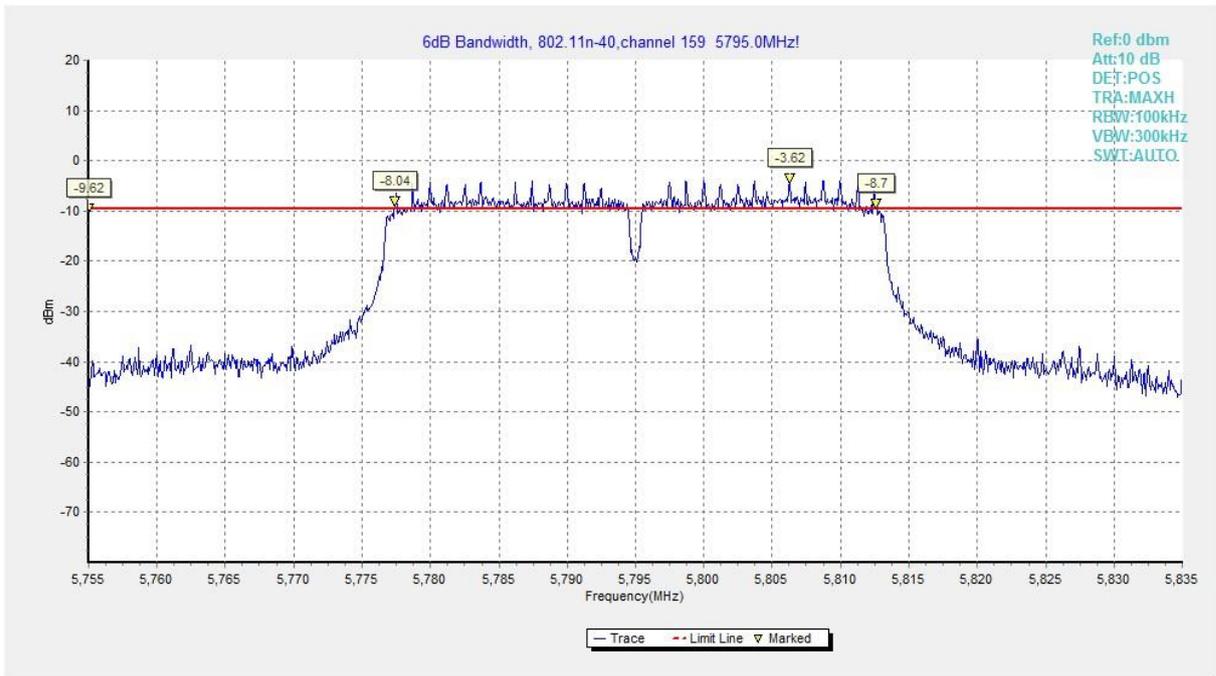


Fig. 8 Occupied 6dB Bandwidth (802.11n-HT40, Ch 159)

A.5. Undesirable Emission

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407(b)	5725MHz~5850MHz	< -27

The measurement is made according to KDB789033 D02 .

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Measurement Uncertainty:

Frequency Range	Uncertainty(dB)
30MHz ≤ f ≤ 2GHz	0.63
2GHz ≤ f ≤ 3.6GHz	0.82
3.6GHz ≤ f ≤ 8GHz	1.55
8GHz ≤ f ≤ 20GHz	1.86
20GHz ≤ f ≤ 22GHz	1.90
22GHz ≤ f ≤ 26GHz	2.20

A.5.1 Transmitter Spurious Emission - Conducted

Measurement Results:

802.11a mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11a	149	30 MHz ~ 1 GHz	Fig.9	P
		1 GHz ~ 12 GHz	Fig.10	P
		12 GHz ~ 25 GHz	Fig.11	P
		25 GHz ~ 40 GHz	Fig.12	P
	157	30 MHz ~ 1 GHz	Fig.13	P
		1 GHz ~ 12 GHz	Fig.14	P
		12 GHz ~ 25 GHz	Fig.15	P
		25 GHz ~ 40 GHz	Fig.16	P
	165	30 MHz ~ 1 GHz	Fig.17	P
		1 GHz ~ 12 GHz	Fig.18	P
		12 GHz ~ 25 GHz	Fig.19	P
		25 GHz ~ 40 GHz	Fig.20	P

802.11n-HT20 mode


MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n HT20	149	30 MHz ~ 1 GHz	Fig.21	P
		1 GHz ~ 12 GHz	Fig.22	P
		12 GHz ~ 25 GHz	Fig.23	P
		25 GHz ~ 40 GHz	Fig.24	P
	157	30 MHz ~ 1 GHz	Fig.25	P
		1 GHz ~ 12 GHz	Fig.26	P
		12 GHz ~ 25 GHz	Fig.27	P
		25 GHz ~ 40 GHz	Fig.28	P
	165	30 MHz ~ 1 GHz	Fig.29	P
		1 GHz ~ 12 GHz	Fig.30	P
		12 GHz ~ 25 GHz	Fig.31	P
		25 GHz ~ 40 GHz	Fig.32	P

802.11n-HT40 mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	151	30 MHz ~ 1 GHz	Fig.33	P
		1 GHz ~ 12 GHz	Fig.34	P
		12 GHz ~ 25 GHz	Fig.35	P
		25 GHz ~ 40 GHz	Fig.36	P
	159	30 MHz ~ 1 GHz	Fig.37	P
		1 GHz ~ 12 GHz	Fig.38	P
		12 GHz ~ 25 GHz	Fig.39	P
		25 GHz ~ 40 GHz	Fig.40	P


Conclusion: PASS

Test graphs as below:

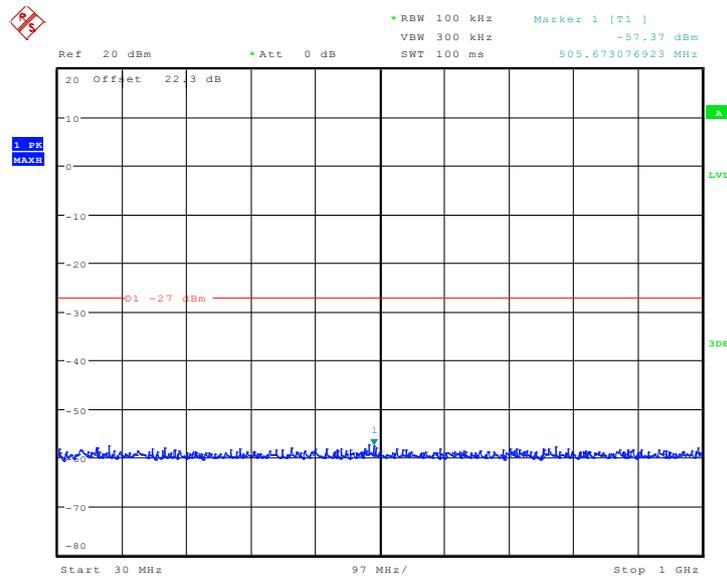


Date: 1.FEB.2015 17:00:34

Fig. 9 Conducted Spurious Emission (802.11a, Ch149, 30 MHz-1 GHz)

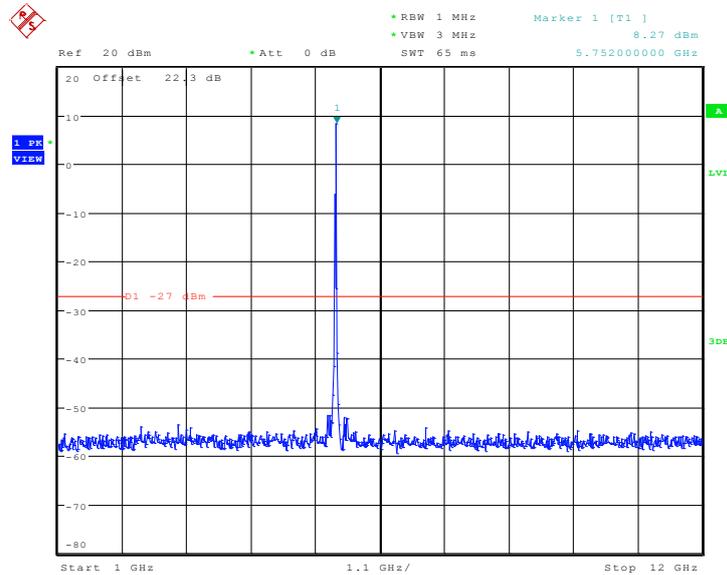


Date: 31.JAN.2015 17:25:24

Fig. 10 Conducted Spurious Emission (802.11a, Ch149, 1 GHz -12 GHz)

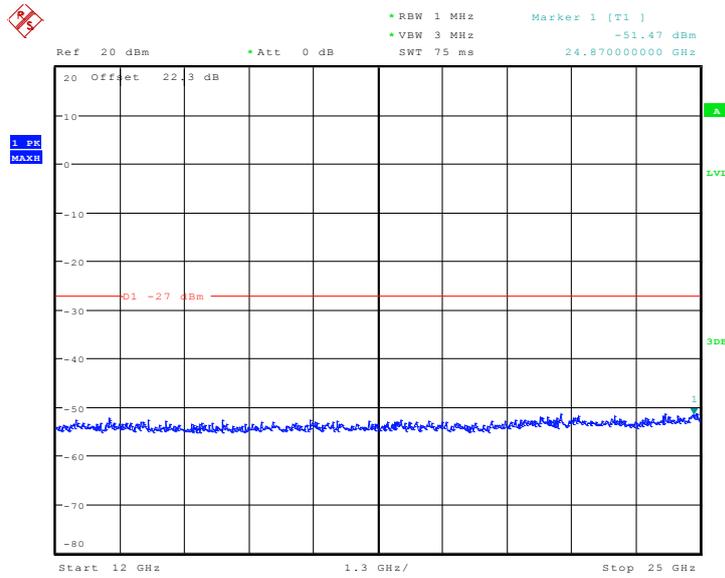


Date: 31.JAN.2015 17:27:27

Fig. 11 Conducted Spurious Emission (802.11a, Ch149, 12 GHz-25 GHz)

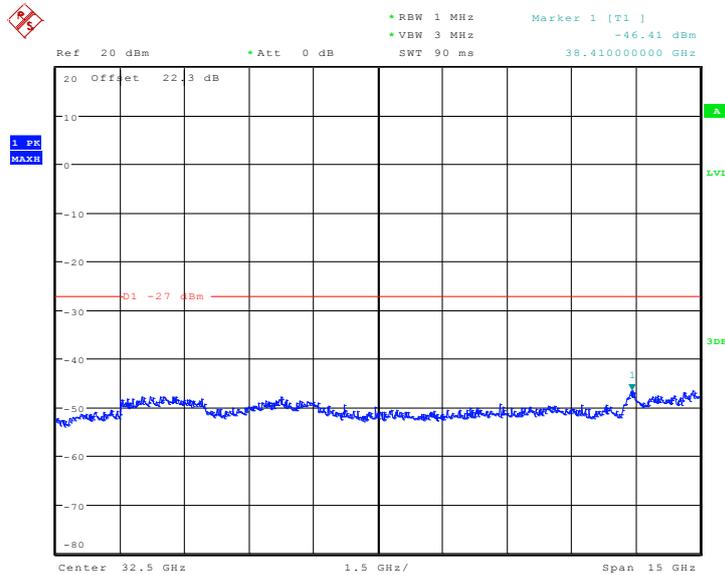


Date: 31.JAN.2015 17:30:29

Fig. 12 Conducted Spurious Emission (802.11a, Ch149, 25 GHz-40 GHz)

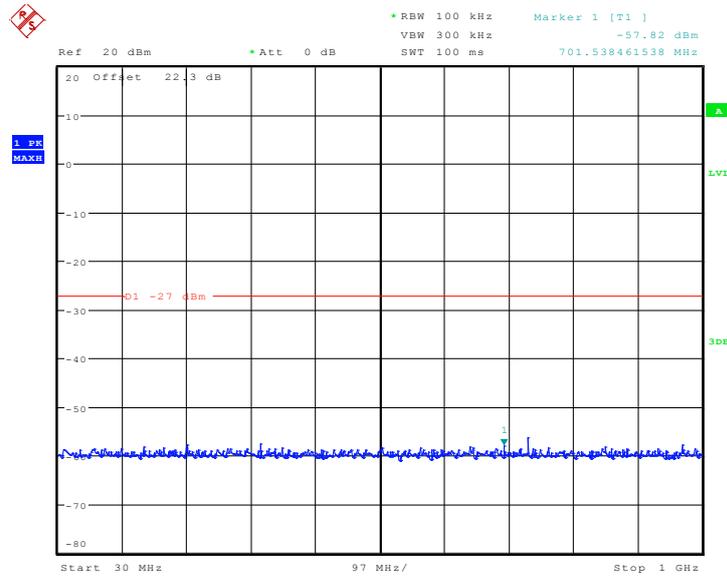


Date: 1.FEB.2015 16:59:40

Fig. 13 Conducted Spurious Emission (802.11a, Ch157, 30 MHz-1 GHz)

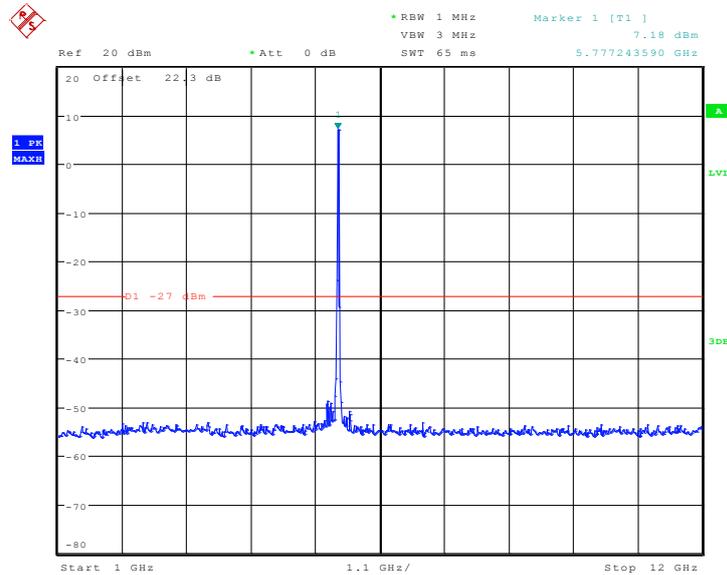


Date: 1.FEB.2015 08:58:47

Fig. 14 Conducted Spurious Emission (802.11a, Ch157, 1 GHz -12 GHz)

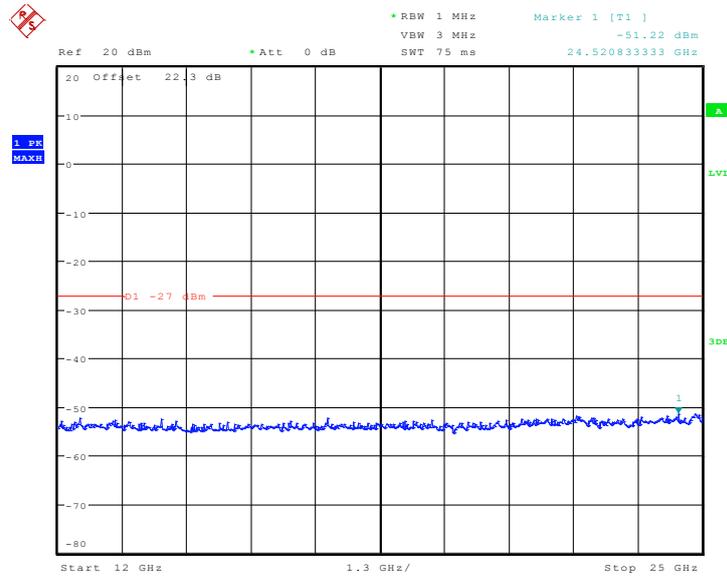


Date: 1.FEB.2015 08:59:47

Fig. 15 Conducted Spurious Emission (802.11a, Ch157, 12 GHz-25 GHz)

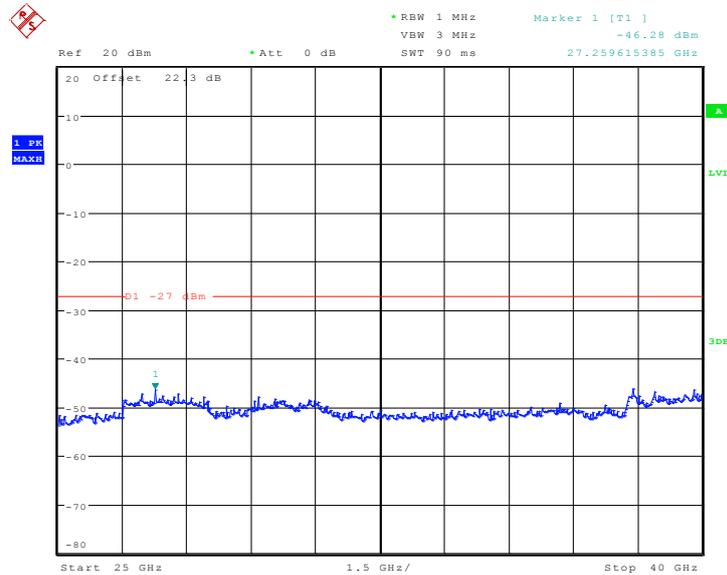


Date: 1.FEB.2015 09:01:36

Fig. 16 Conducted Spurious Emission (802.11a, Ch157, 25 GHz-40 GHz)

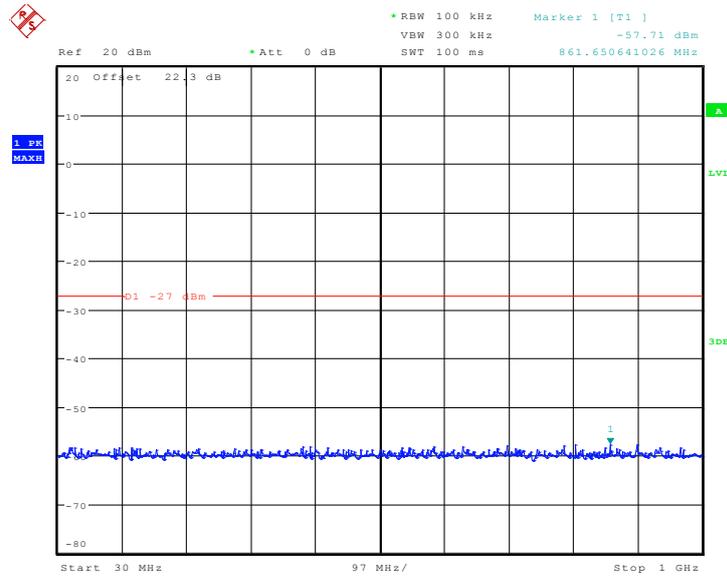


Date: 1.FEB.2015 09:08:53

Fig. 17 Conducted Spurious Emission (802.11a, Ch165, 30 MHz-1 GHz)

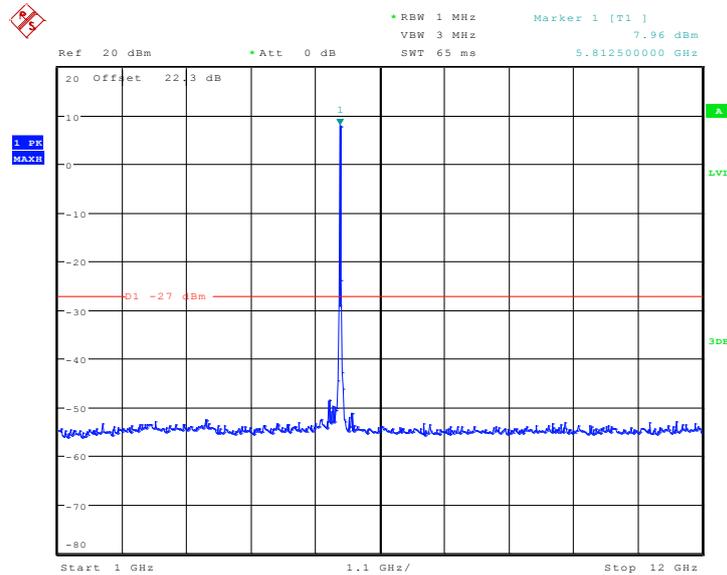


Date: 1.FEB.2015 09:05:01

Fig. 18 Conducted Spurious Emission (802.11a, Ch165, 1 GHz -12 GHz)

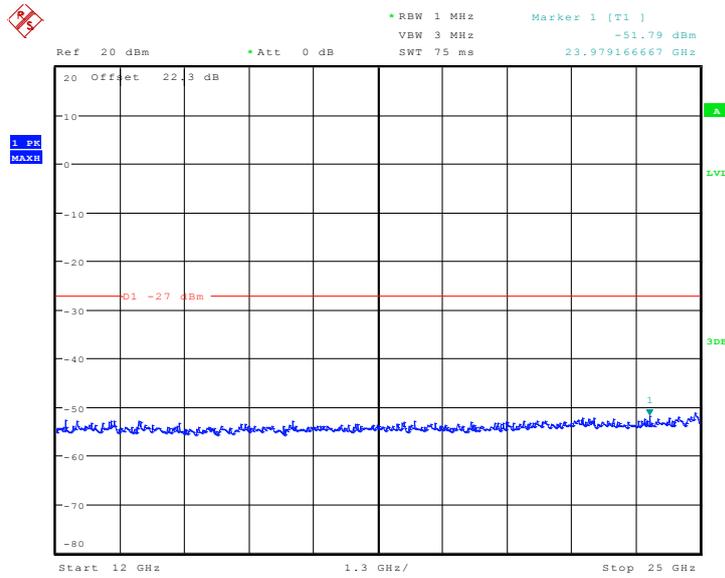


Date: 1.FEB.2015 09:05:31

Fig. 19 Conducted Spurious Emission (802.11a, Ch165, 12 GHz-25 GHz)

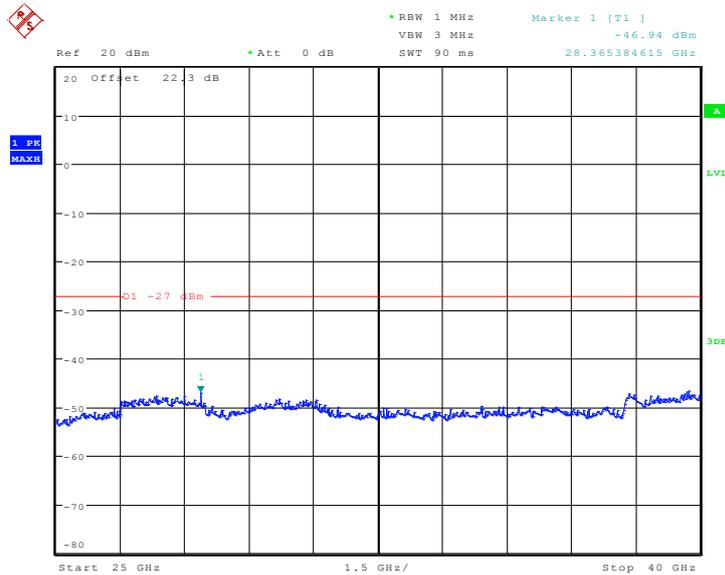


Date: 1.FEB.2015 09:02:46

Fig. 20 Conducted Spurious Emission (802.11a, Ch165, 25 GHz-40 GHz)

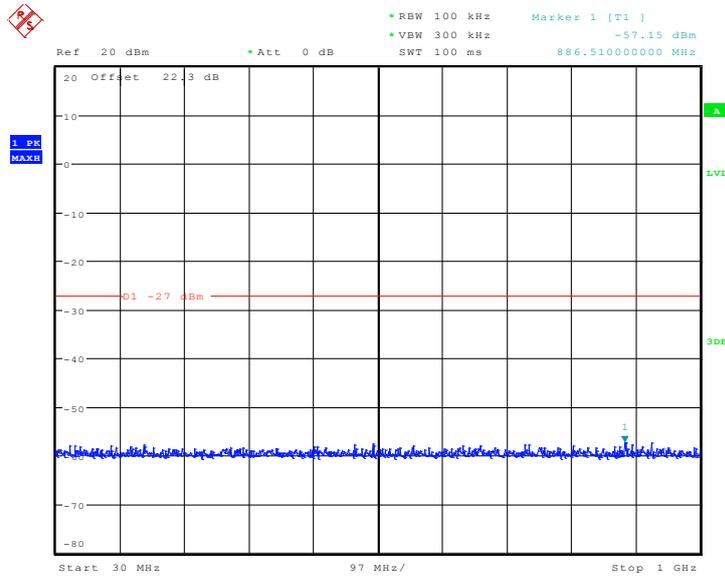


Date: 31.JAN.2015 17:20:55

Fig. 21 Conducted Spurious Emission (802.11n-HT20, Ch149, 30 MHz-1 GHz)

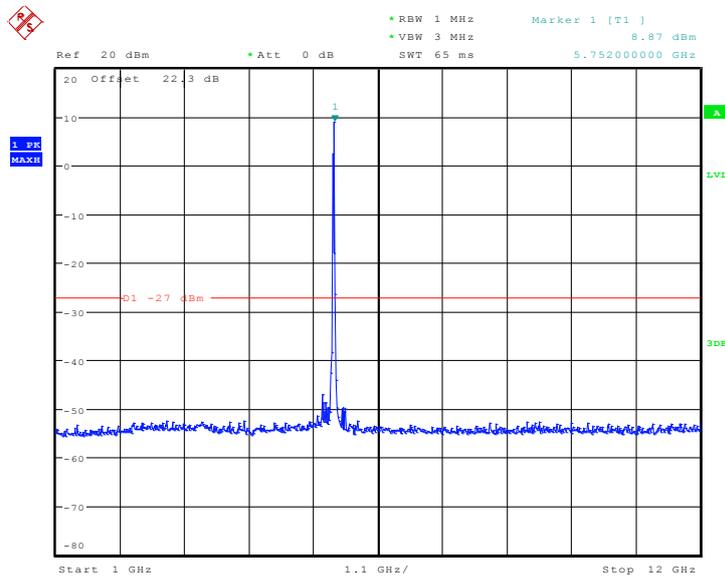


Date: 31.JAN.2015 17:24:41

Fig. 22 Conducted Spurious Emission (802.11n-HT20, Ch149, 1 GHz -12 GHz)

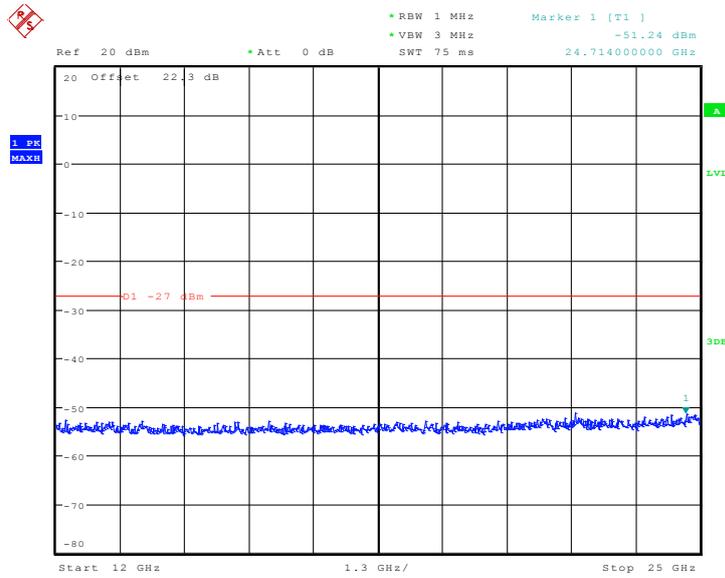


Date: 31.JAN.2015 17:28:07

Fig. 23 Conducted Spurious Emission (802.11n-HT20, Ch149, 12 GHz-25 GHz)

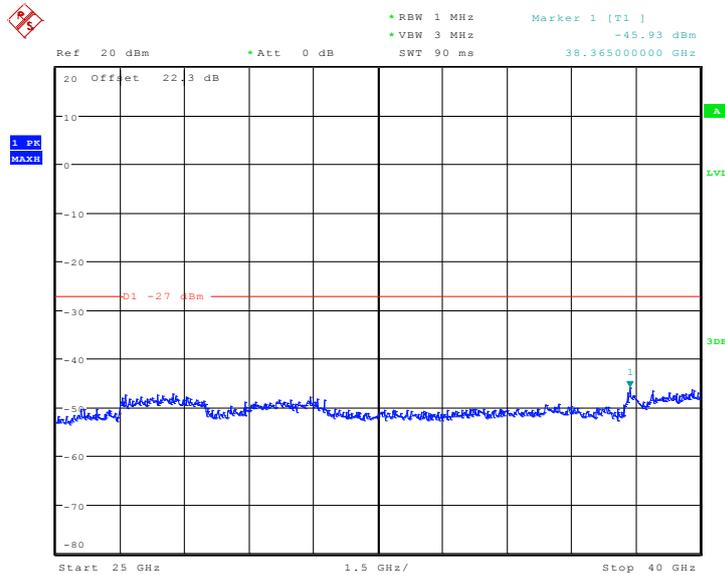


Date: 31.JAN.2015 17:29:32

Fig. 24 Conducted Spurious Emission (802.11n-HT20, Ch149, 25 GHz-40 GHz)

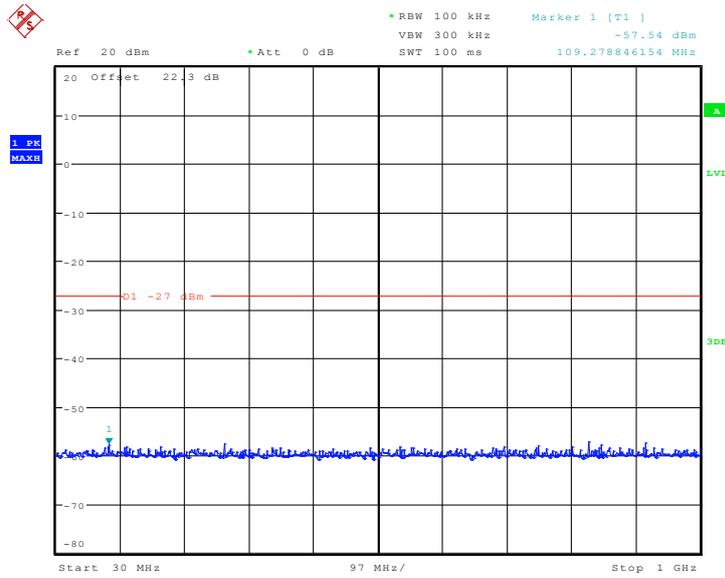


Date: 1.FEB.2015 16:57:24

Fig. 25 Conducted Spurious Emission (802.11n-HT20, Ch157, 30 MHz-1 GHz)

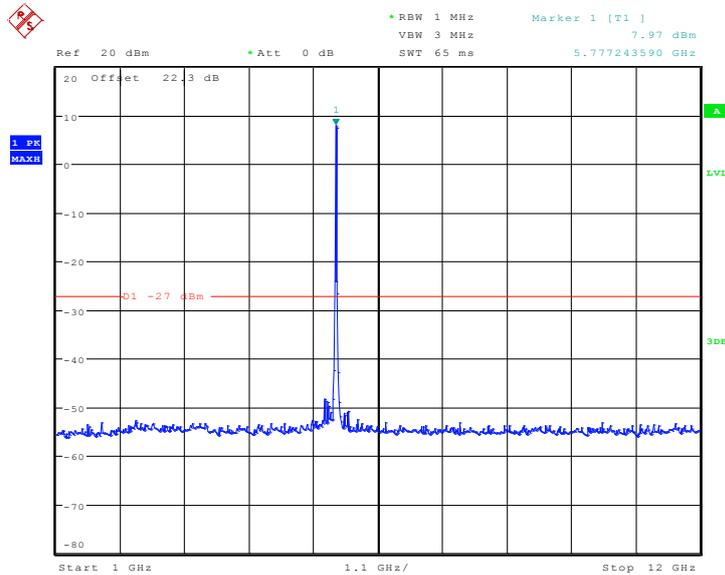


Date: 1.FEB.2015 08:58:16

Fig. 26 Conducted Spurious Emission (802.11n-HT20, Ch157, 1 GHz -12 GHz)

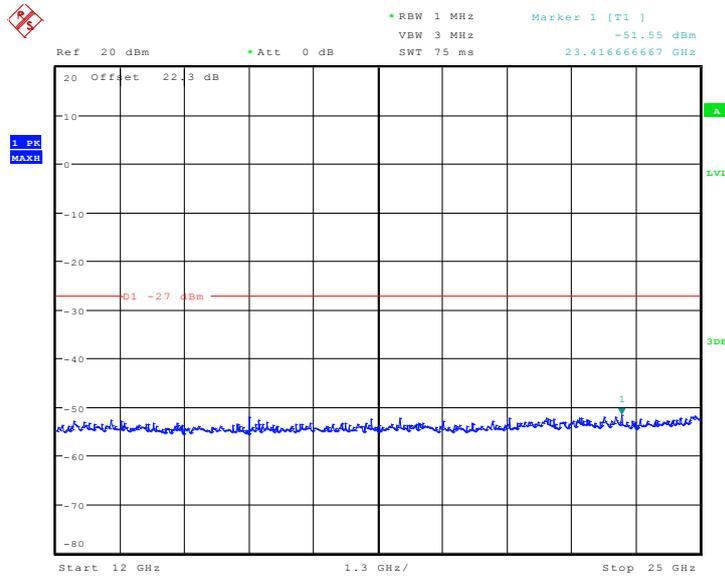


Date: 1.FEB.2015 09:00:21

Fig. 27 Conducted Spurious Emission (802.11n-HT20, Ch157, 12 GHz-25 GHz)

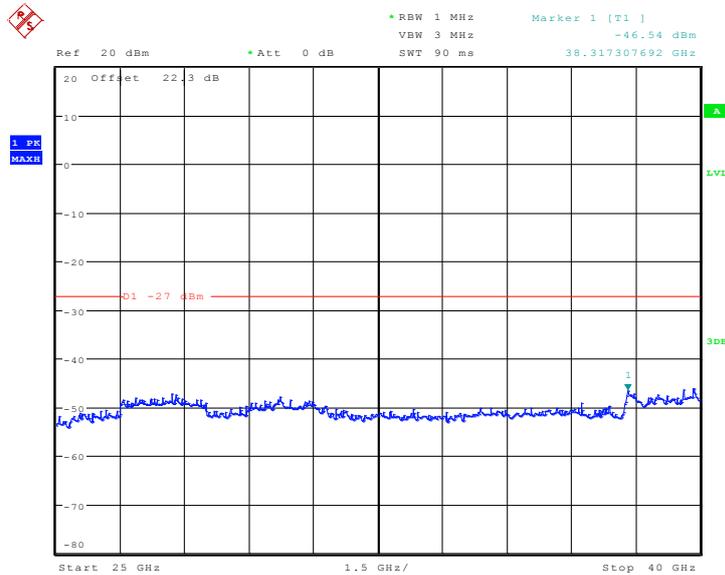


Date: 1.FEB.2015 09:00:58

Fig. 28 Conducted Spurious Emission (802.11n-HT20, Ch157, 25 GHz-40 GHz)

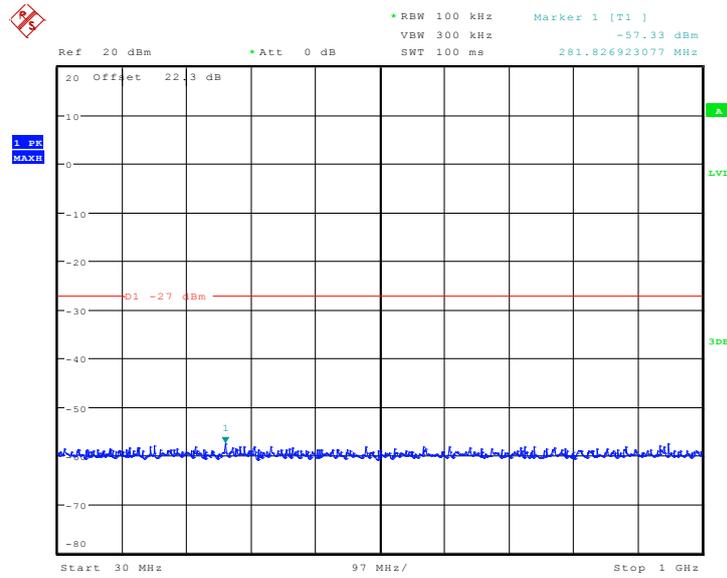


Date: 1.FEB.2015 09:08:14

Fig. 29 Conducted Spurious Emission (802.11n-HT20, Ch165, 30 MHz-1 GHz)

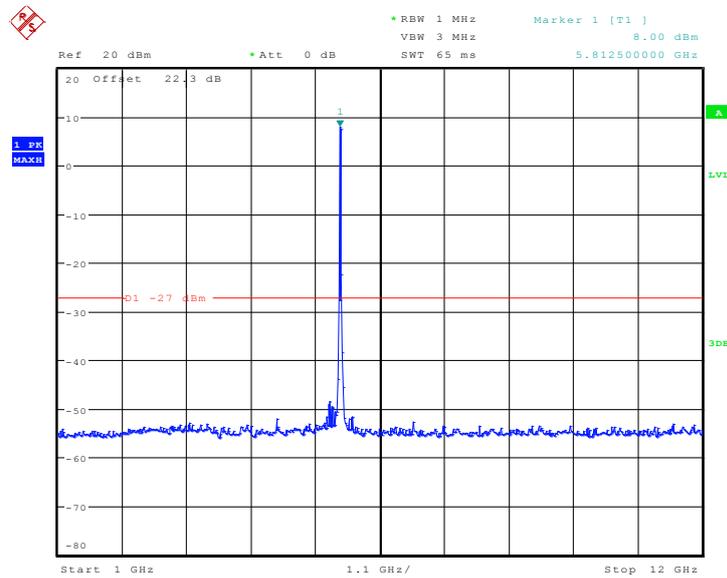


Date: 1.FEB.2015 09:04:25

Fig. 30 Conducted Spurious Emission (802.11n-HT20, Ch165, 1 GHz -12 GHz)

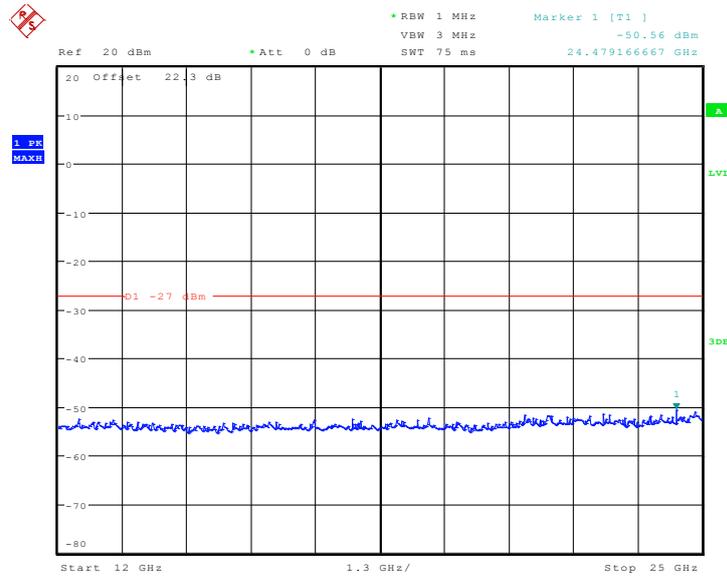


Date: 1.FEB.2015 09:06:33

Fig. 31 Conducted Spurious Emission (802.11n-HT20, Ch165, 12 GHz-25 GHz)

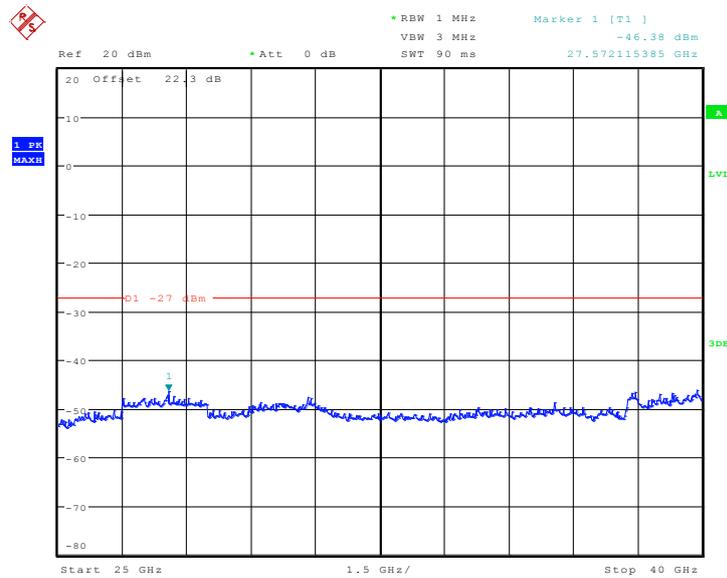


Date: 1.FEB.2015 09:03:33

Fig. 32 Conducted Spurious Emission (802.11n-HT20, Ch165, 25 GHz-40 GHz)

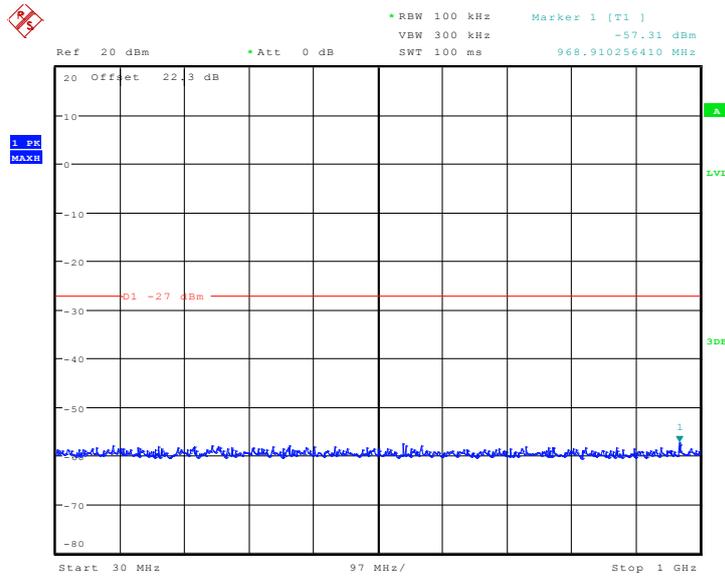


Date: 1.FEB.2015 09:10:21

Fig. 33 Conducted Spurious Emission (802.11n-HT40, Ch151, 30 MHz-1 GHz)

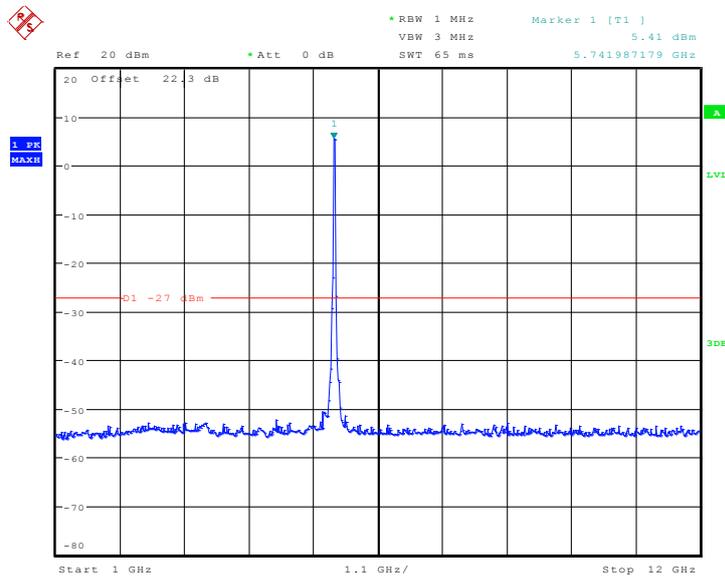


Date: 1.FEB.2015 09:13:05

Fig. 34 Conducted Spurious Emission (802.11n-HT40, Ch151, 1 GHz -12 GHz)

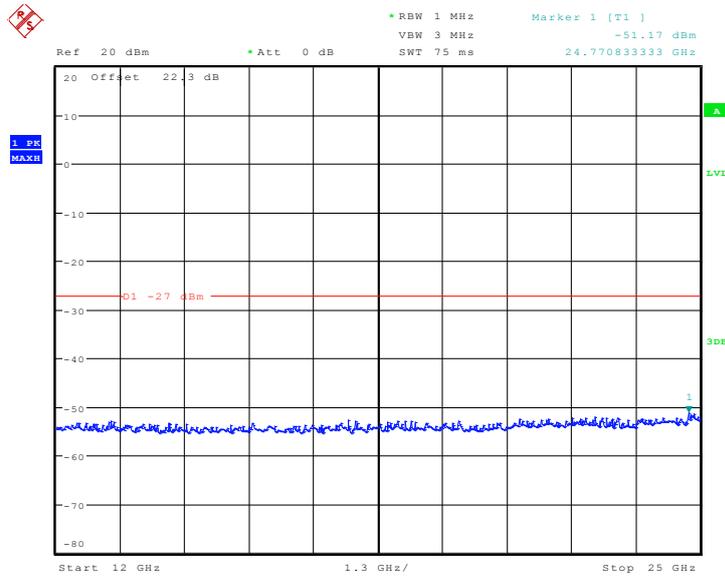


Date: 1.FEB.2015 09:13:44

Fig. 35 Conducted Spurious Emission (802.11n-HT40, Ch151, 12 GHz-25 GHz)

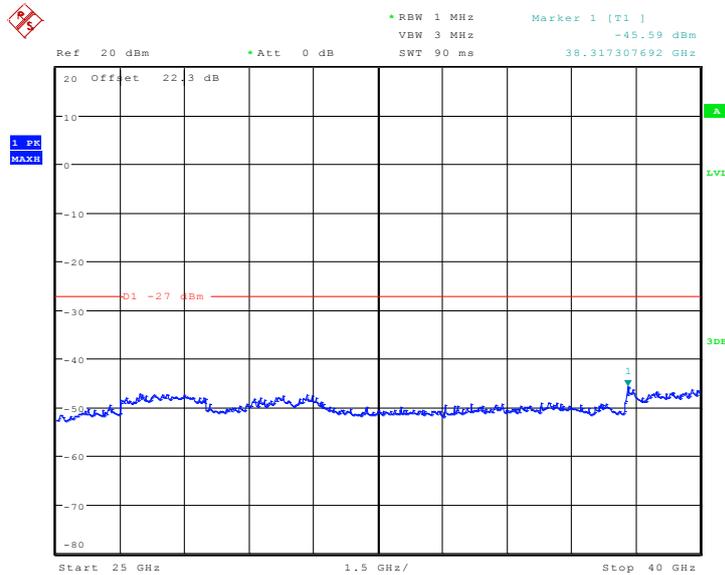


Date: 1.FEB.2015 09:18:20

Fig. 36 Conducted Spurious Emission (802.11n-HT40, Ch151, 25 GHz-40 GHz)

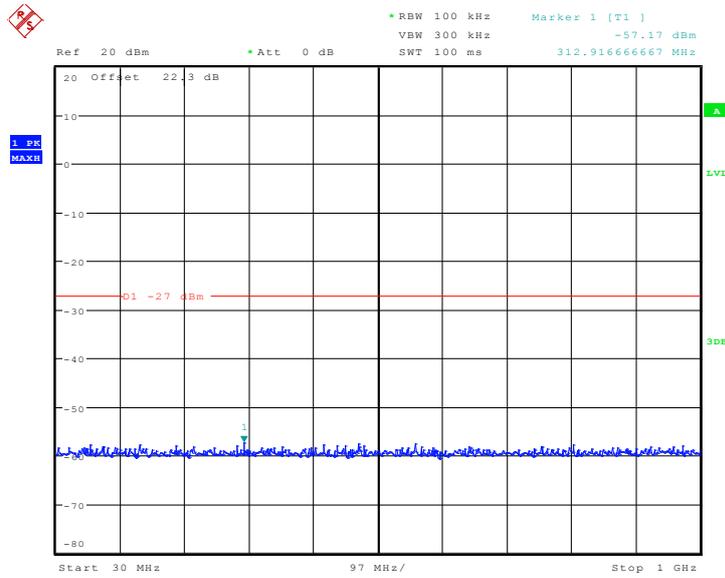


Date: 1.FEB.2015 17:02:44

Fig. 37 Conducted Spurious Emission (802.11n-HT40, Ch159, 30 MHz-1 GHz)

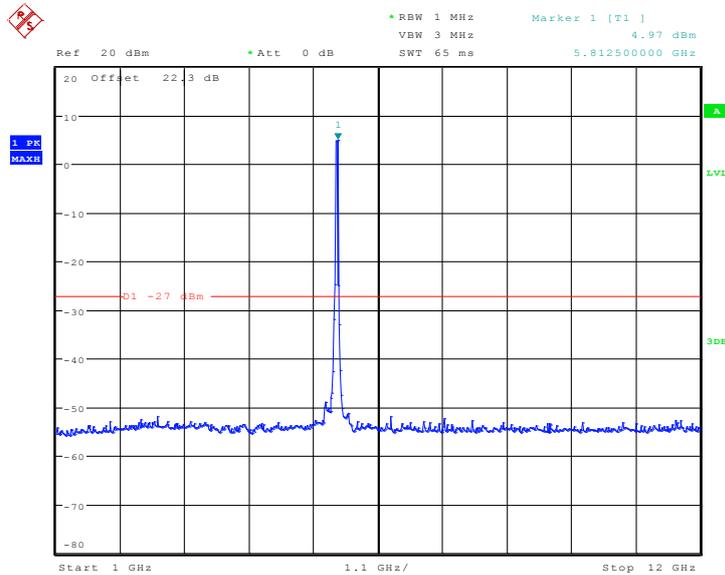


Date: 1.FEB.2015 09:12:30

Fig. 38 Conducted Spurious Emission (802.11n-HT40, Ch159, 1 GHz -12 GHz)

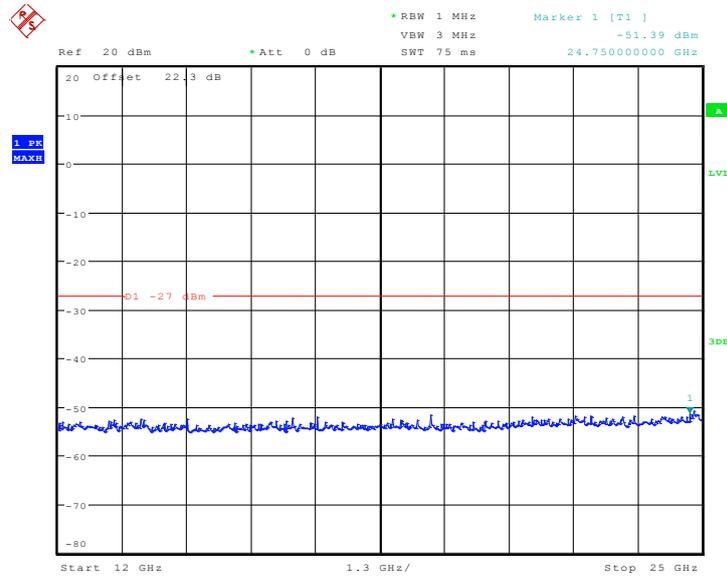

Date: 1.FEB.2015 09:14:38

Fig. 39 Conducted Spurious Emission (802.11n-HT40, Ch159, 12 GHz-25 GHz)

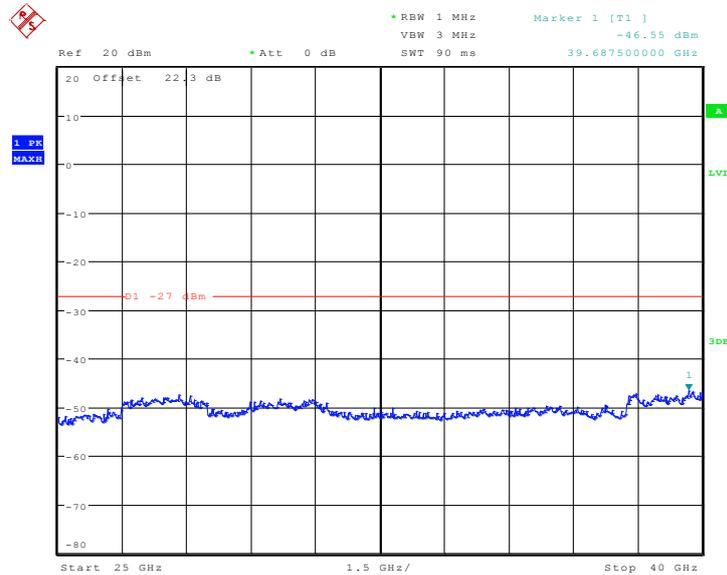

Date: 1.FEB.2015 09:15:21

Fig. 40 Conducted Spurious Emission (802.11n-HT40, Ch159, 25 GHz-40 GHz)

A.5.2 Transmitter Spurious Emission - Radiated

Measurement Uncertainty:

Frequency Range	Uncertainty(dB)
f ≤ 1GHz	3.9
f > 1GHz	4.3

Measurement Results:

802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	149	1 GHz ~ 6 GHz	Fig.41	P
		6 GHz ~ 18 GHz	Fig.42	P
	157	30 MHz ~ 1 GHz	Fig.43	P
		1 GHz ~ 6 GHz	Fig.44	P
		6 GHz ~ 18 GHz	Fig.45	P
		18 GHz ~ 26.5 GHz	Fig.46	P
	165	26.5 GHz ~ 40 GHz	Fig.47	P
		1 GHz ~ 6 GHz	Fig.48	P
		6 GHz ~ 18 GHz	Fig.49	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	149	1 GHz ~ 6 GHz	Fig.50	P
		6 GHz ~ 18 GHz	Fig.51	P
	157	30 MHz ~ 1 GHz	Fig.52	P
		1 GHz ~ 6 GHz	Fig.53	P
		6 GHz ~ 18 GHz	Fig.54	P
		18 GHz ~ 26.5 GHz	Fig.55	P
	165	26.5 GHz ~ 40 GHz	Fig.56	P
		1 GHz ~ 6 GHz	Fig.57	P
		6 GHz ~ 18 GHz	Fig.58	P

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT40)	151	30 MHz ~ 1 GHz	Fig.59	P
		1 GHz ~ 6 GHz	Fig.60	P
		6 GHz ~ 18 GHz	Fig.61	P
		18 GHz ~ 26.5 GHz	Fig.62	P
	159	26.5 GHz ~ 40 GHz	Fig.63	P
		1 GHz ~ 6 GHz	Fig.64	P
		6 GHz ~ 18 GHz	Fig.65	P

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

802.11a

Ch149

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
17776.800	53.2	-18.5	45.6	26.100	H
17774.400	52.3	-18.5	45.6	25.200	H
17635.200	51.9	-18.9	45.6	25.200	H
17798.400	51.7	-18.5	45.6	24.600	V
17522.400	51.6	-19.2	45.6	25.200	V
17944.800	51.5	-17.7	45.6	23.600	V

Ch157

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
17967.600	53.8	-17.7	45.6	25.900	V
17966.400	53.7	-17.7	45.6	25.800	V
17944.800	52.5	-17.7	45.6	24.600	V
17802.000	52.4	-18.5	45.6	25.300	H
17858.400	52.1	-18.5	45.6	25.000	H
17611.200	51.9	-18.9	45.6	25.200	H

Ch165

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
17770.800	53.4	-18.5	45.6	26.300	H
17851.200	52.1	-18.5	45.6	25.000	V
17938.800	52.1	-17.7	45.6	24.200	H
17685.600	52.0	-18.9	45.6	25.300	H
17776.800	51.6	-18.5	45.6	24.500	V
17802.000	51.6	-18.5	45.6	24.500	H

802.11n-HT20

Ch149

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17833.200	54.2	-18.5	45.6	27.100	H
17785.200	52.9	-18.5	45.6	25.800	V
17798.400	52.6	-18.5	45.6	25.500	V
17478.000	52.6	-19.2	41.5	30.300	V
17869.200	52.6	-18.5	45.6	25.500	H
17692.800	52.5	-18.9	45.6	25.800	V

Ch157

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17763.600	51.9	-18.5	45.6	24.800	V
17806.800	51.9	-18.5	45.6	24.800	V
17816.400	51.9	-18.5	45.6	24.800	V
17766.000	51.5	-18.5	45.6	24.400	H
17792.400	51.4	-18.5	45.6	24.300	H
17829.600	51.4	-18.5	45.6	24.300	H

Ch165

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17595.600	52.8	-18.9	45.6	26.100	V
17750.400	52.3	-18.5	45.6	25.200	V
17726.400	52.0	-18.9	45.6	25.300	H
17668.800	51.9	-18.9	45.6	25.200	V
17863.200	51.9	-18.5	45.6	24.800	H
17904.000	51.5	-18.5	45.6	24.400	V



802.11n-HT40

Ch151

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17774.400	52.8	-18.5	45.6	25.700	H
17808.000	52.0	-18.5	45.6	24.900	V
17582.400	52.0	-18.9	45.6	25.300	H
17887.200	51.8	-18.5	45.6	24.700	V
17992.800	51.7	-17.7	45.6	23.800	V
17766.000	51.7	-18.5	45.6	24.600	V

Ch159

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17815.200	52.5	-18.5	45.6	25.400	V
17826.000	52.2	-18.5	45.6	25.100	V
17821.200	52.2	-18.5	45.6	25.100	H
17894.400	52.2	-18.5	45.6	25.100	V
17731.200	52.0	-18.9	45.6	25.300	H
17901.600	51.8	-18.5	45.6	24.700	H

Test graphs as below:

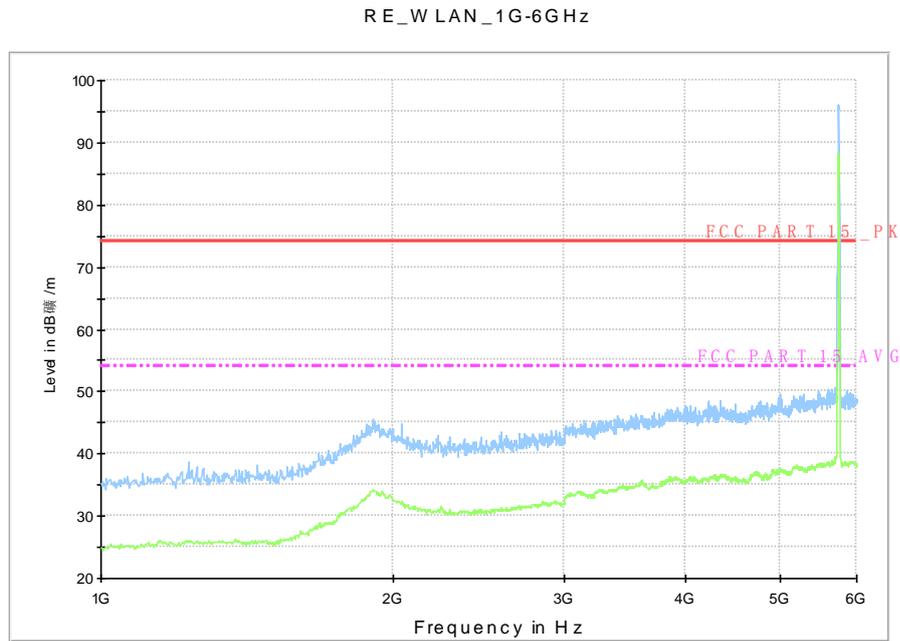


Fig. 41 Radiated Spurious Emission (802.11a, Ch149, 1 GHz-6 GHz)

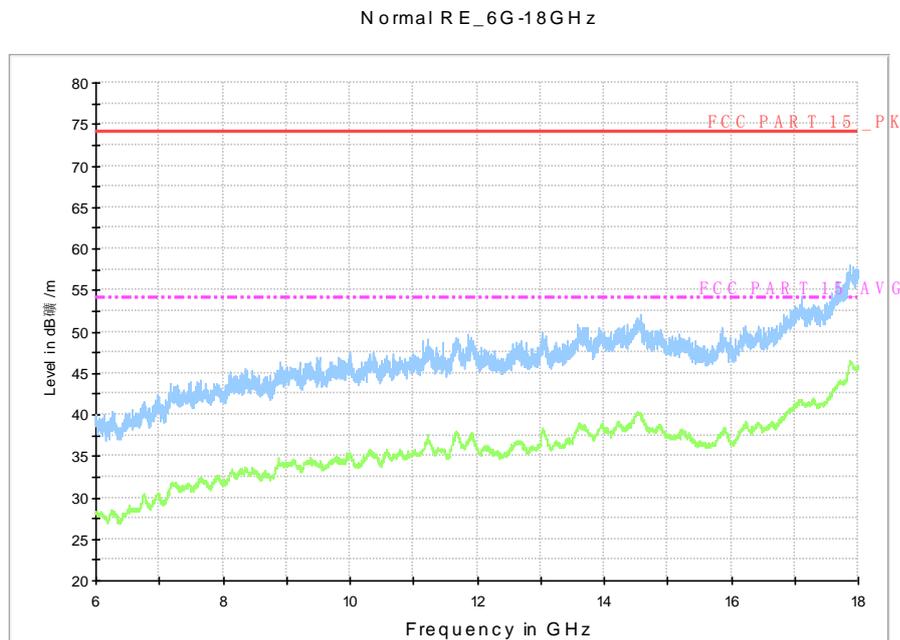


Fig. 42 Radiated Spurious Emission (802.11a, Ch149, 6 GHz-18 GHz)

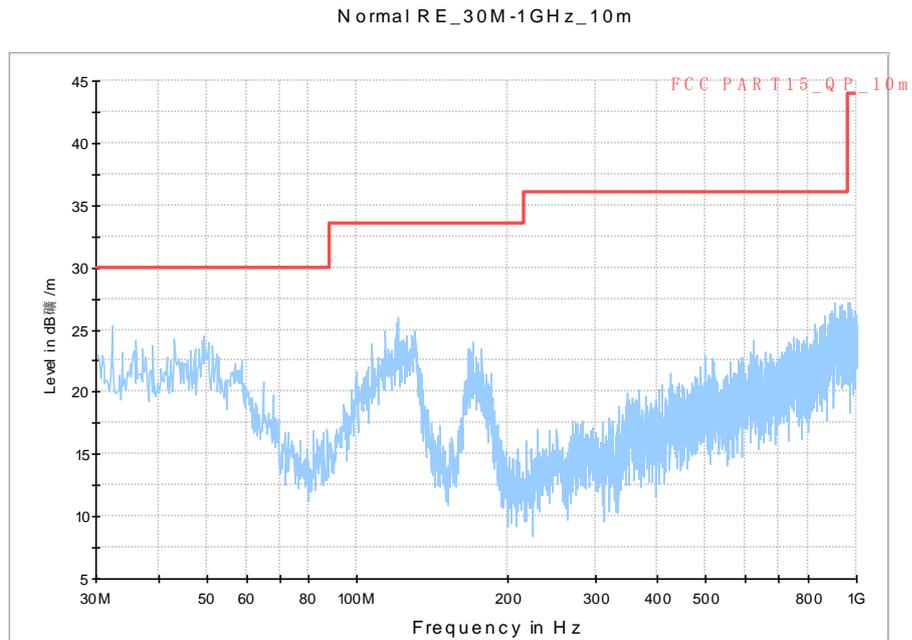


Fig. 43 Radiated Spurious Emission (802.11a, Ch157, 30 MHz-1 GHz)

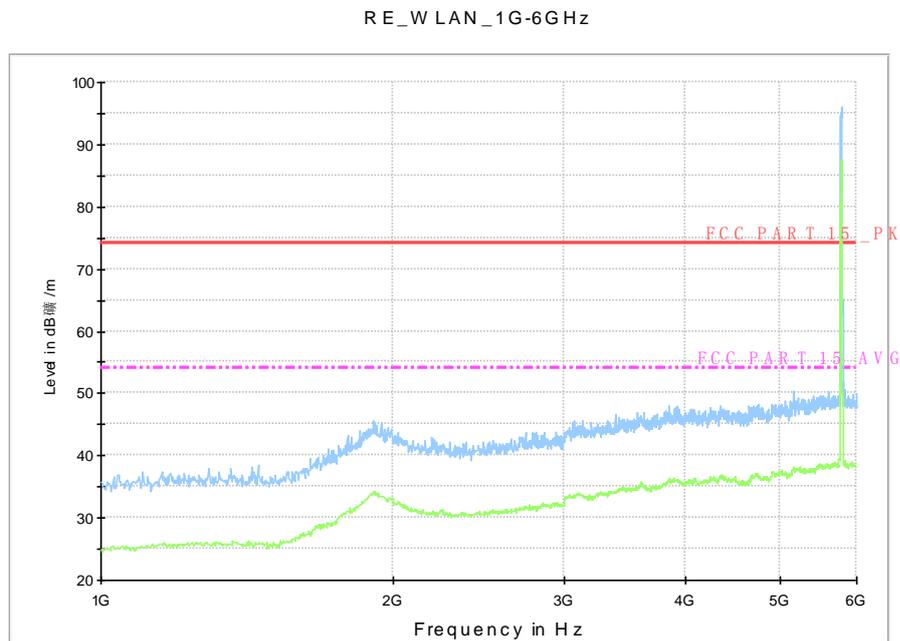


Fig. 44 Radiated Spurious Emission (802.11a, Ch157, 1 GHz-6 GHz)

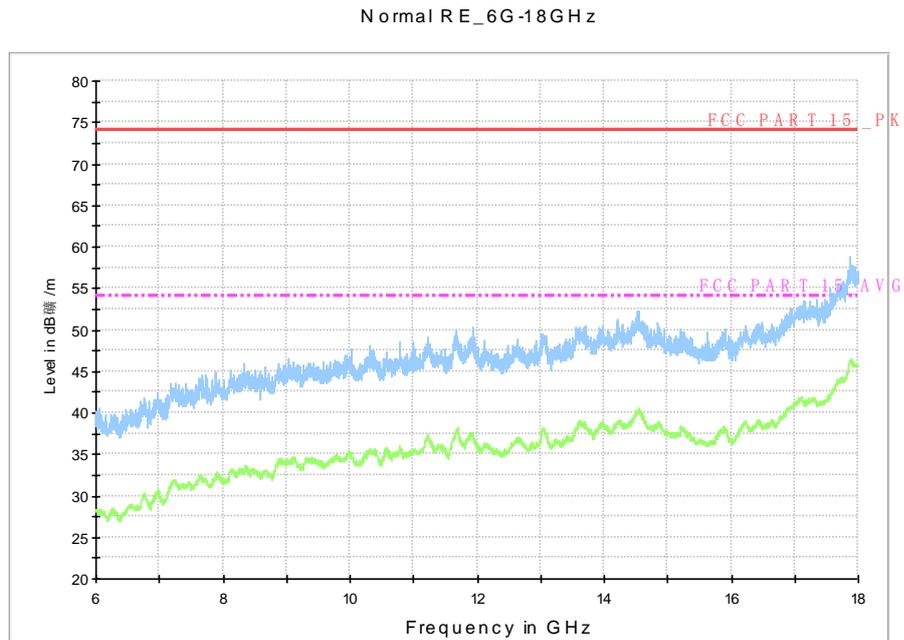


Fig. 45 Radiated Spurious Emission (802.11a, Ch157, 6 GHz-18 GHz)

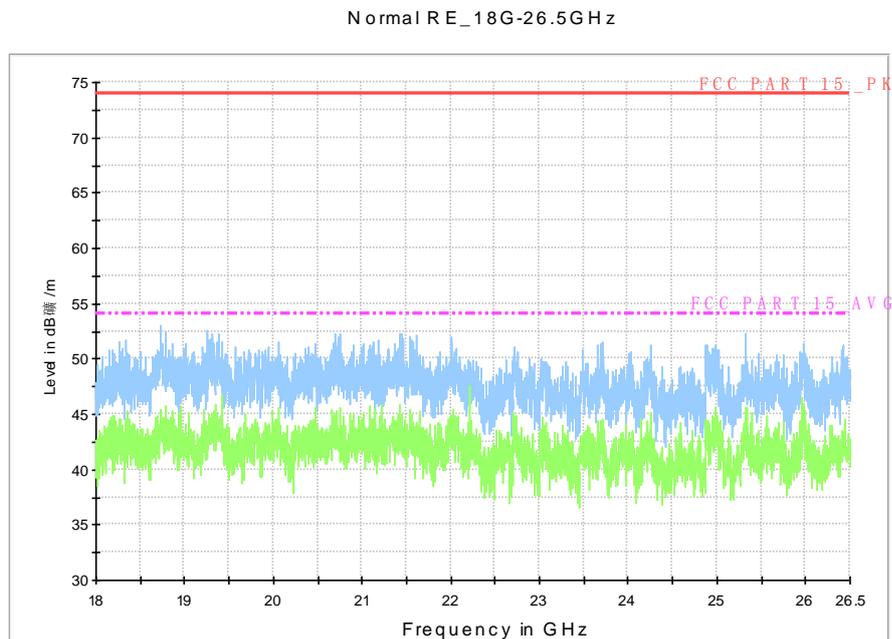


Fig. 46 Radiated Spurious Emission (802.11a, Ch157, 18 GHz-26.5 GHz)

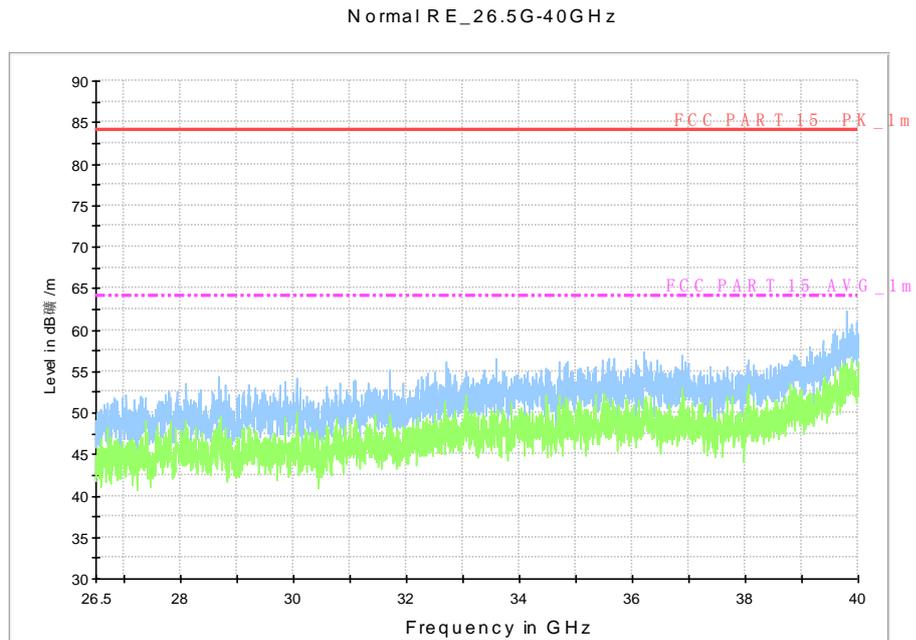


Fig. 47 Radiated emission: 802.11n, (802.11a, Ch157, 26.5 GHz - 40 GHz)

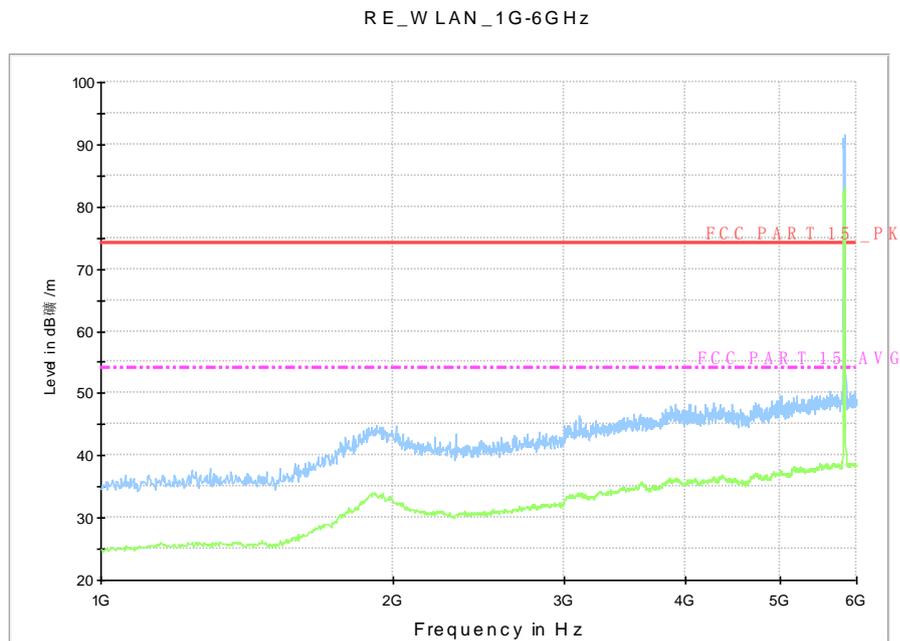


Fig. 48 Radiated Spurious Emission (802.11a, Ch165, 1 GHz-6 GHz)

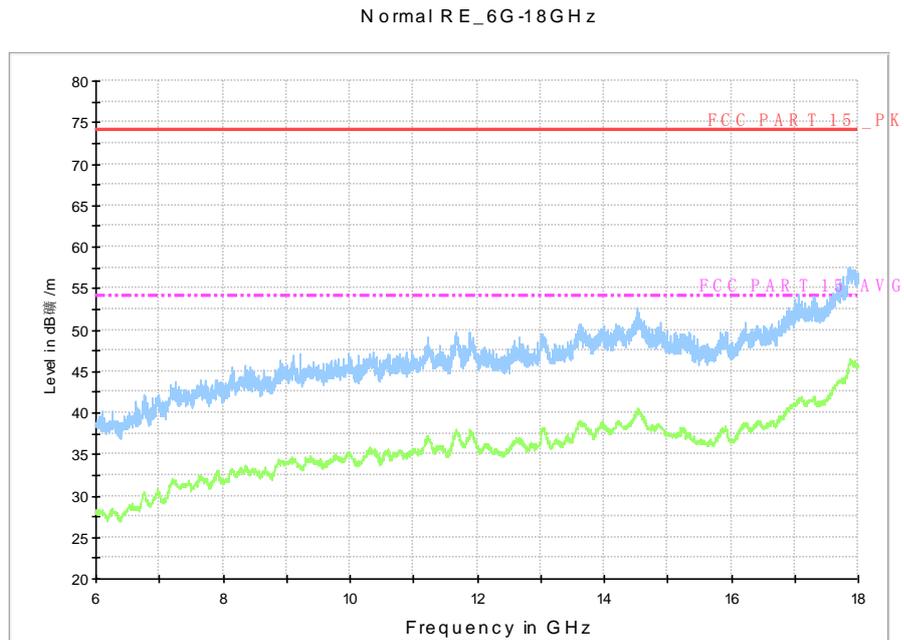


Fig. 49 Radiated Spurious Emission (802.11a, Ch165, 6 GHz-18 GHz)

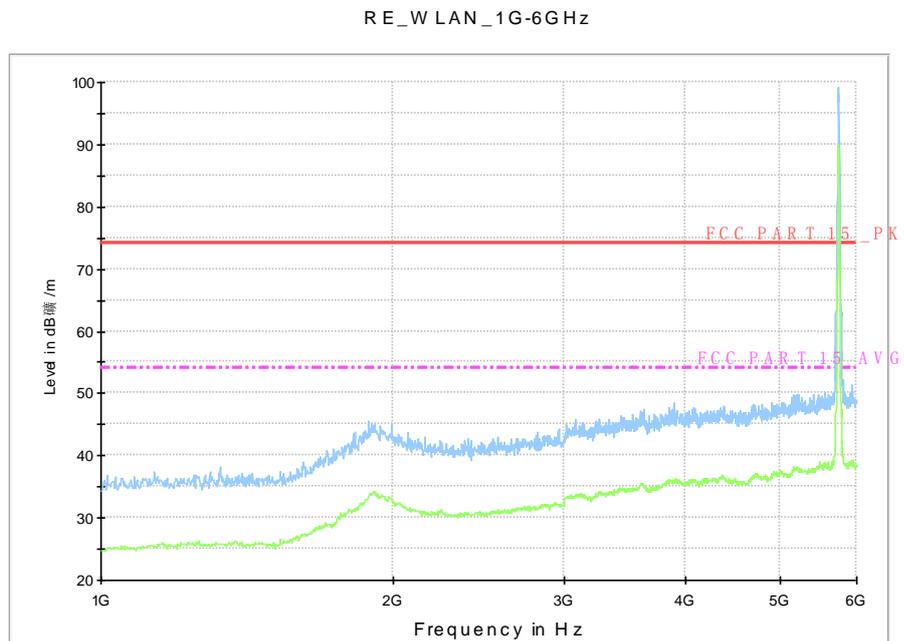


Fig. 50 Radiated Spurious Emission (802.11n-HT20, Ch149, 1 GHz-6 GHz)

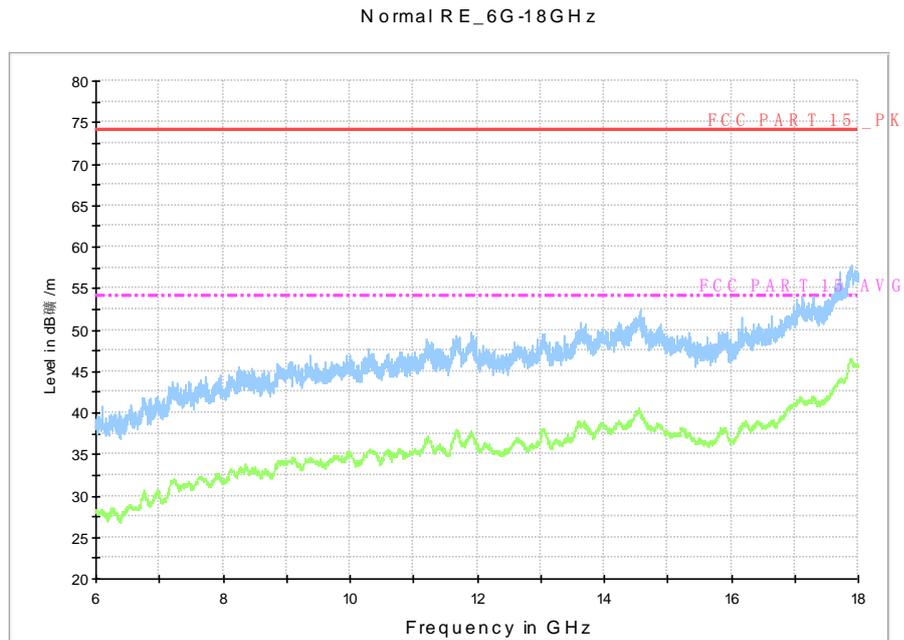


Fig. 51 Radiated Spurious Emission (802.11n-HT20, Ch149, 6 GHz-18 GHz)

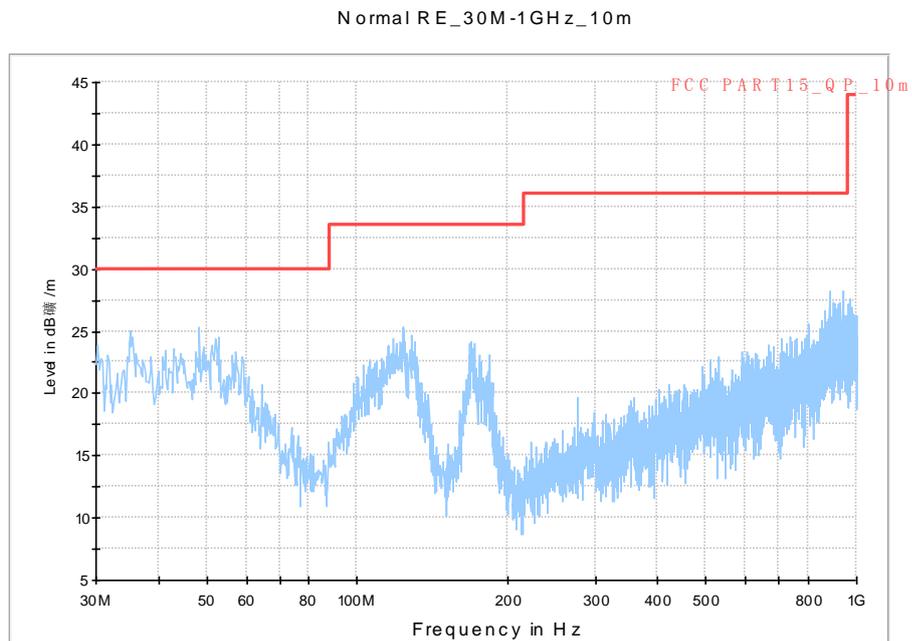


Fig. 52 Radiated Spurious Emission (802.11n-HT20, Ch157, 30 MHz-1 GHz)

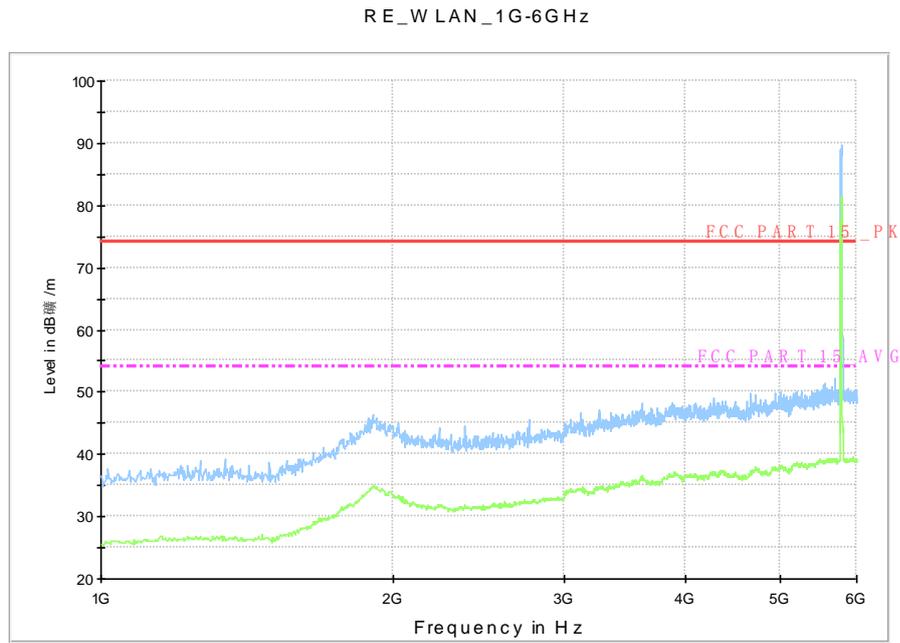


Fig. 53 Radiated Spurious Emission (802.11n-HT20, Ch157, 1 GHz-6 GHz)

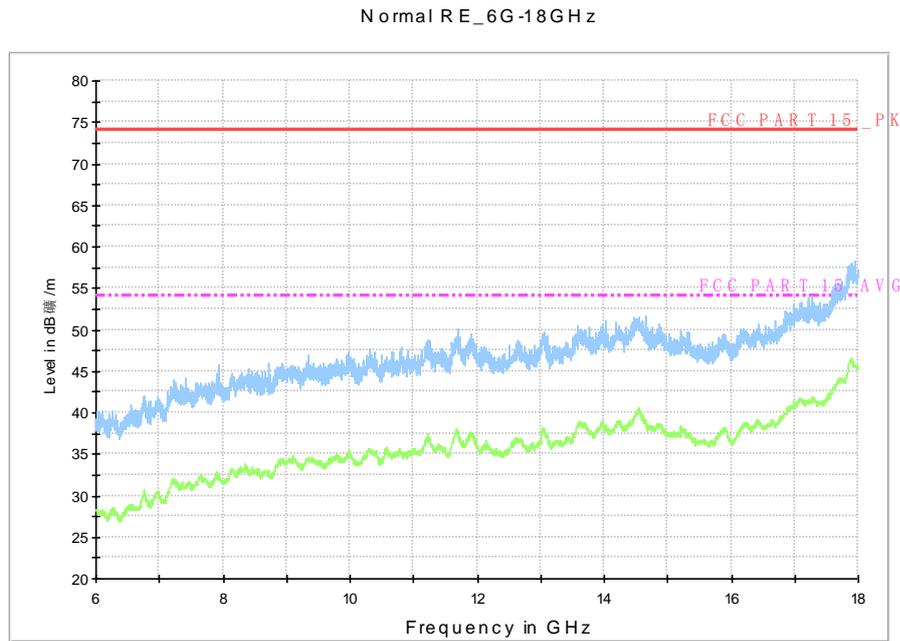


Fig. 54 Radiated Spurious Emission (802.11n-HT20, Ch157, 6 GHz-18 GHz)

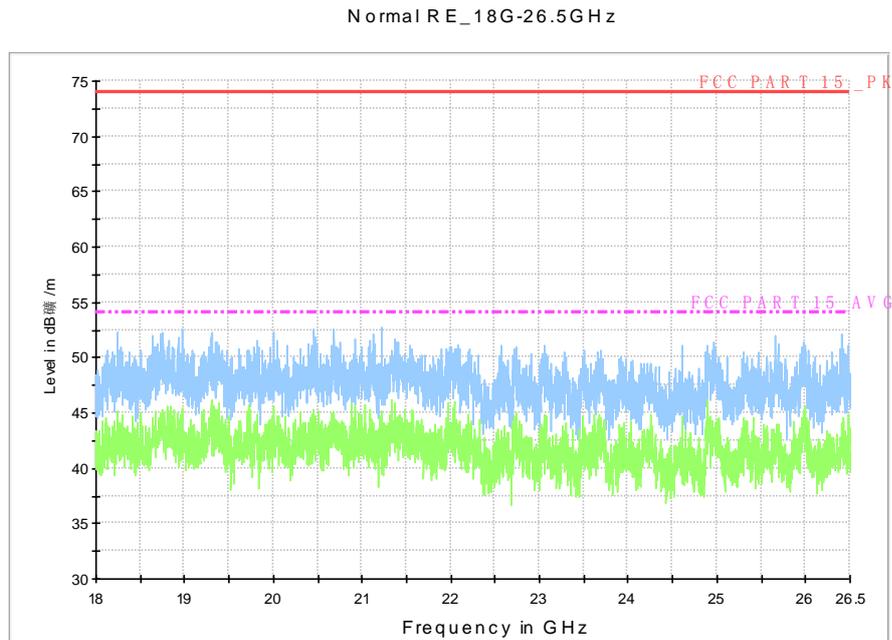


Fig. 55 Radiated Spurious Emission (802.11n-HT20, Ch157, 18 GHz-26.5 GHz)

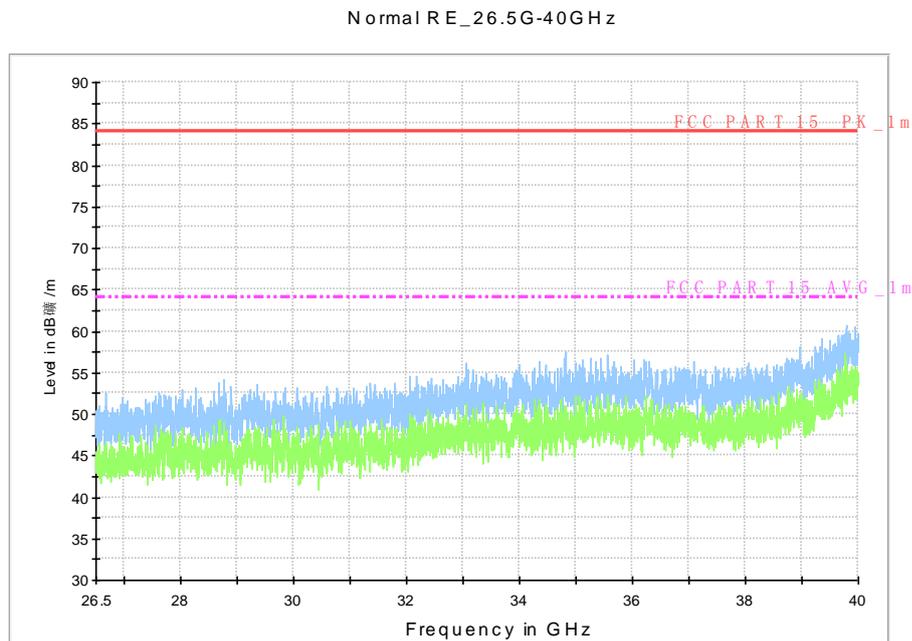


Fig. 56 Radiated emission: 802.11n, (802.11n-HT20, Ch157, 26.5 GHz - 40 GHz)

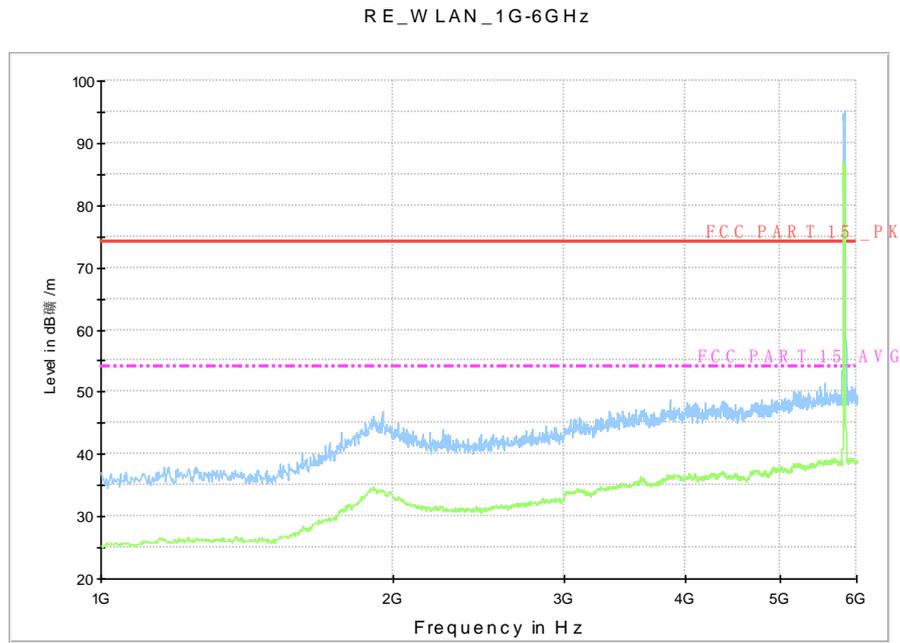


Fig. 57 Radiated Spurious Emission (802.11n-HT20, Ch165, 1 GHz-6 GHz)

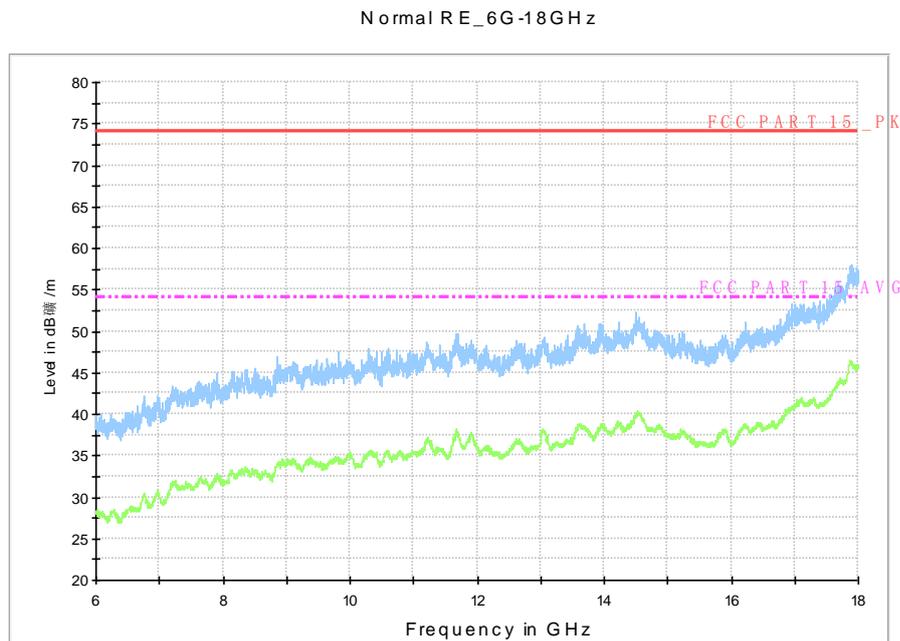


Fig. 58 Radiated Spurious Emission (802.11n-HT20, Ch165, 6 GHz-18 GHz)

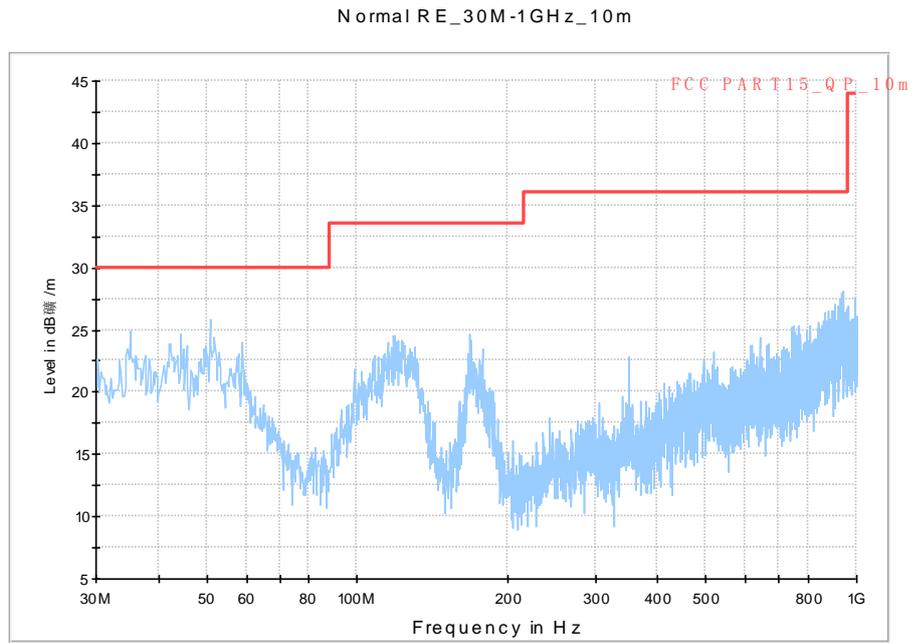


Fig. 59 Radiated Spurious Emission (802.11n-HT40, Ch151, 30 MHz-1 GHz)

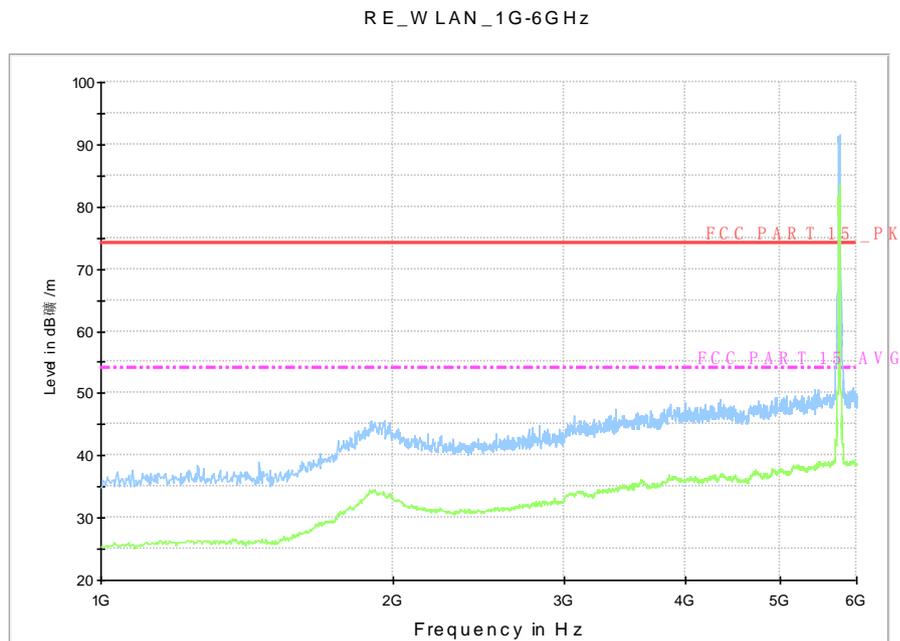


Fig. 60 Radiated Spurious Emission (802.11n-HT40, Ch151, 1 GHz-6 GHz)

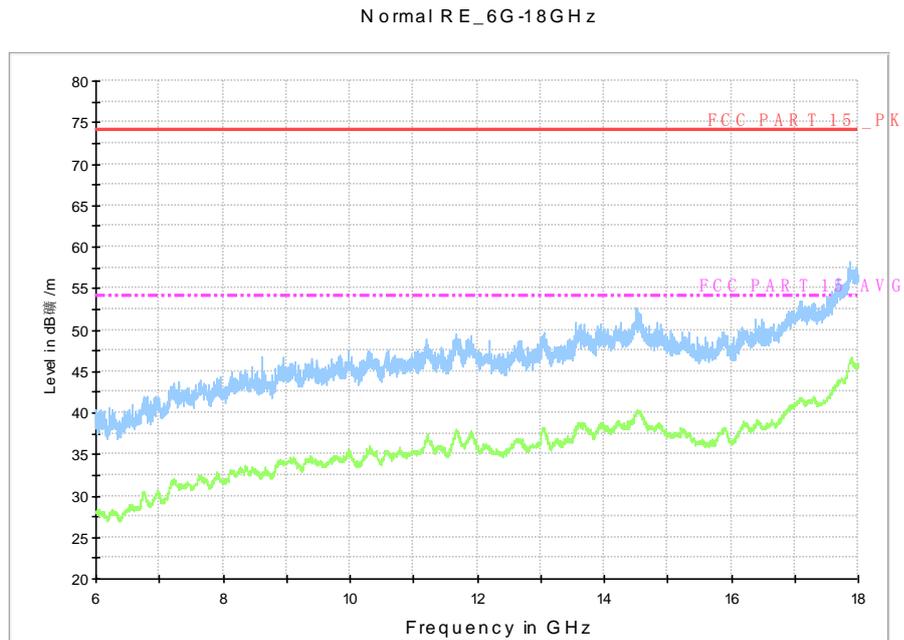


Fig. 61 Radiated Spurious Emission (802.11n-HT40, Ch151, 6 GHz-18 GHz)

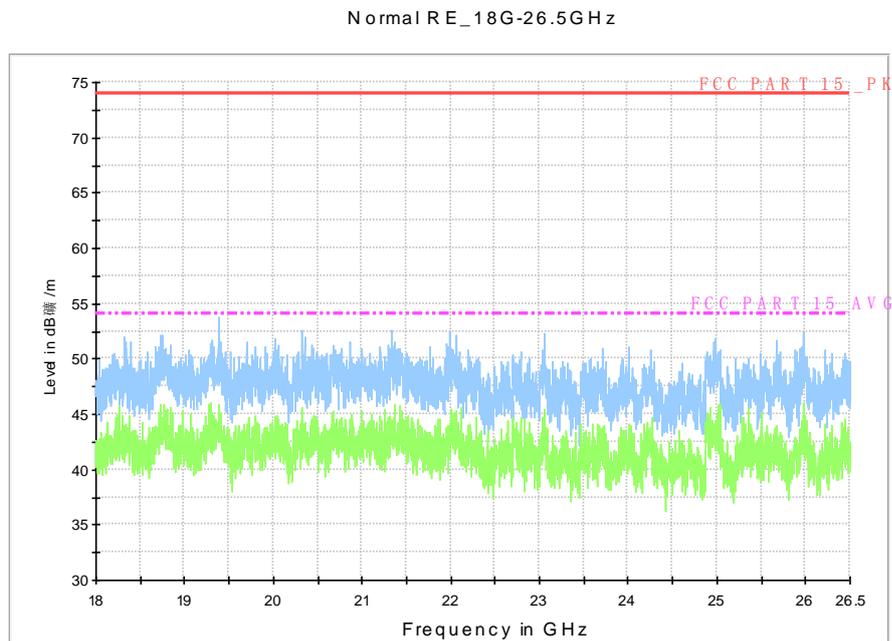


Fig. 62 Radiated Spurious Emission (802.11n-HT40, Ch151, 18 GHz-26.5 GHz)

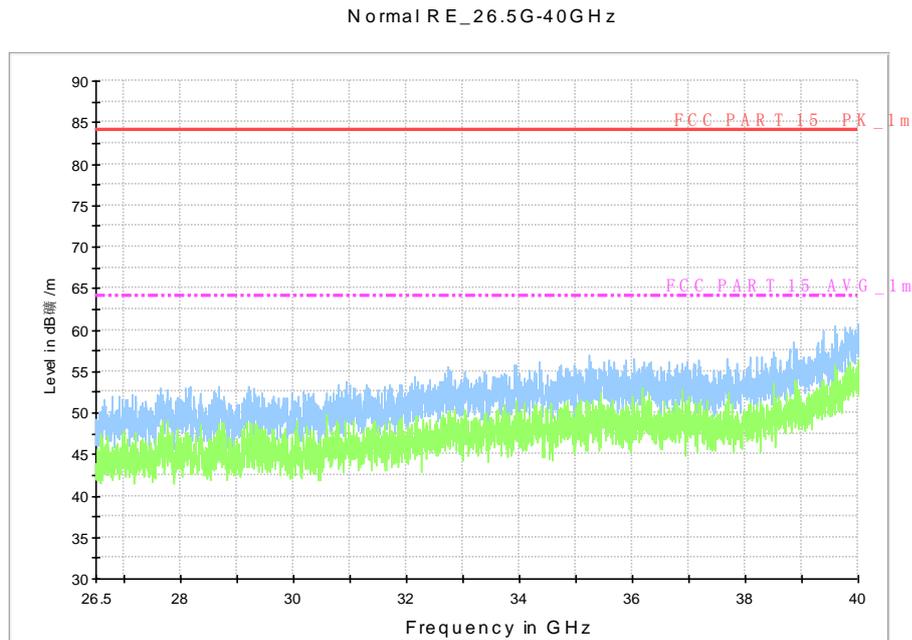


Fig. 63 Radiated emission: 802.11n, (802.11n-HT40, Ch151, 26.5 GHz - 40 GHz)

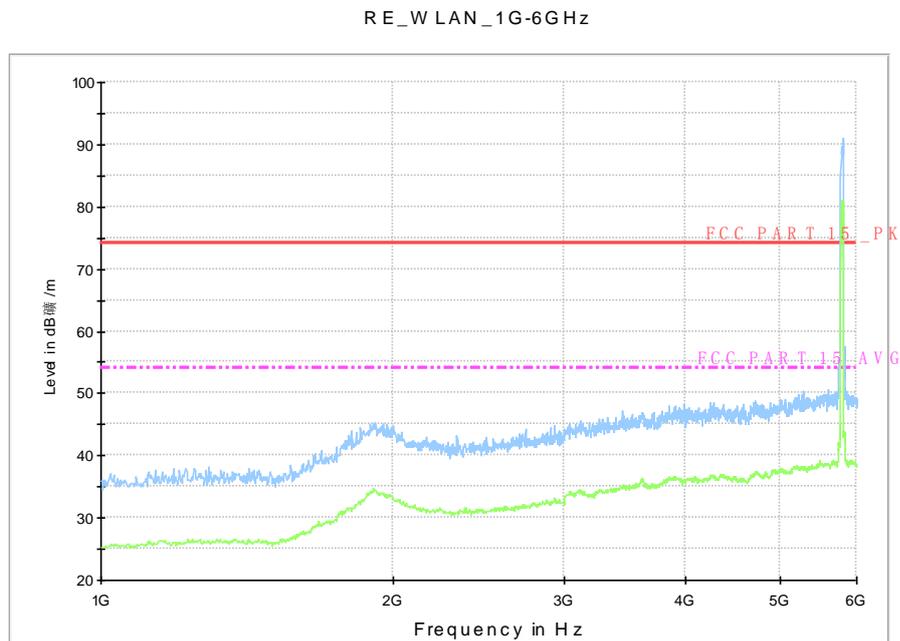


Fig. 64 Radiated Spurious Emission (802.11n-HT40, Ch159 1 GHz-6 GHz)

Normal RE_6G-18GHz

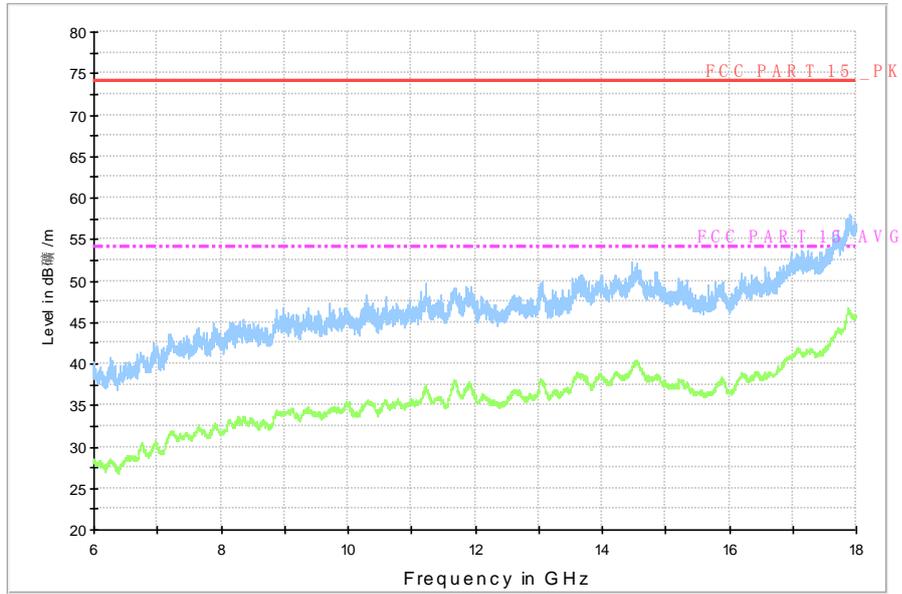


Fig. 65 Radiated Spurious Emission (802.11n-HT40, Ch159, 6 GHz-18 GHz)

A.6. Band Edges Compliance

A6.1 Band Edges - conducted

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407(b)	5715MHz~5860MHz	< -17
	Below 5715MHz, Above5860MHz	< -27

The measurement is made according to KDB 789033 D02

Measurement Uncertainty:


Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.66	P
	5825 MHz	Fig.67	P
802.11n HT20	5745 MHz	Fig.68	P
	5825 MHz	Fig.69	P
802.11n HT40	5755 MHz	Fig.70	P
	5795 MHz	Fig.71	P


Conclusion: PASS

Test graphs as below:

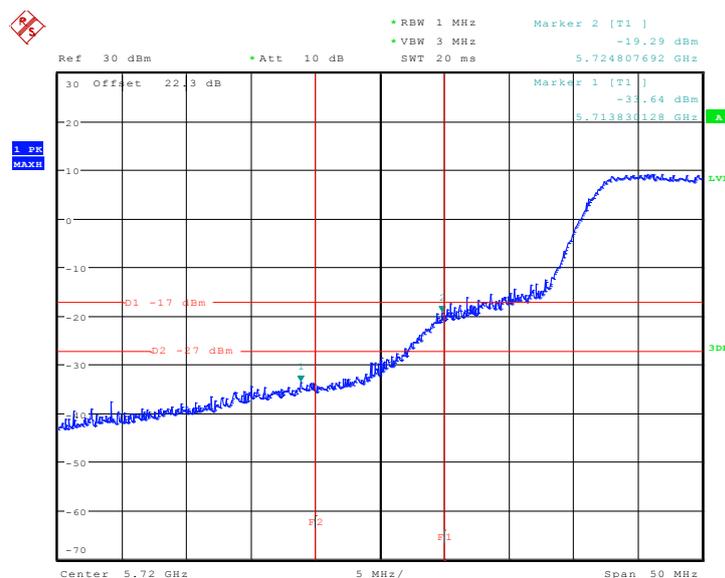


Date: 1.FEB.2015 10:14:11

Fig. 66 Band Edges (802.11a, 5745MHz)

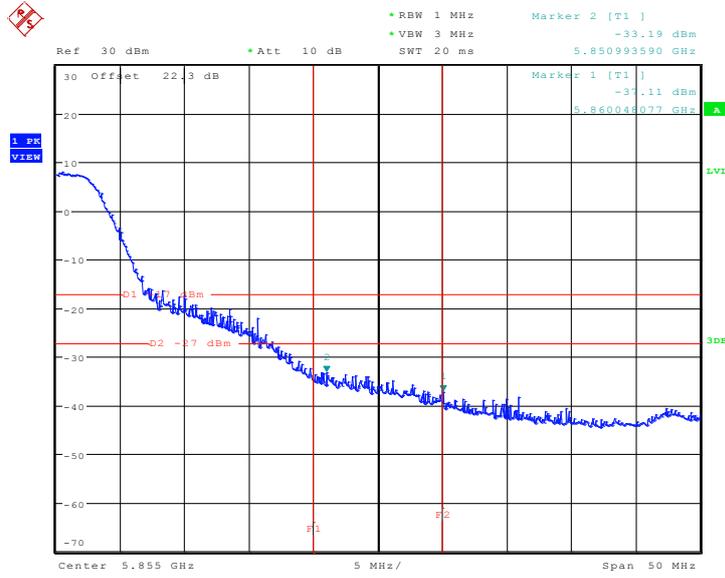


Date: 1.FRR.2015 10:21:18

Fig. 67 Band Edges (802.11a, 5825MHz)

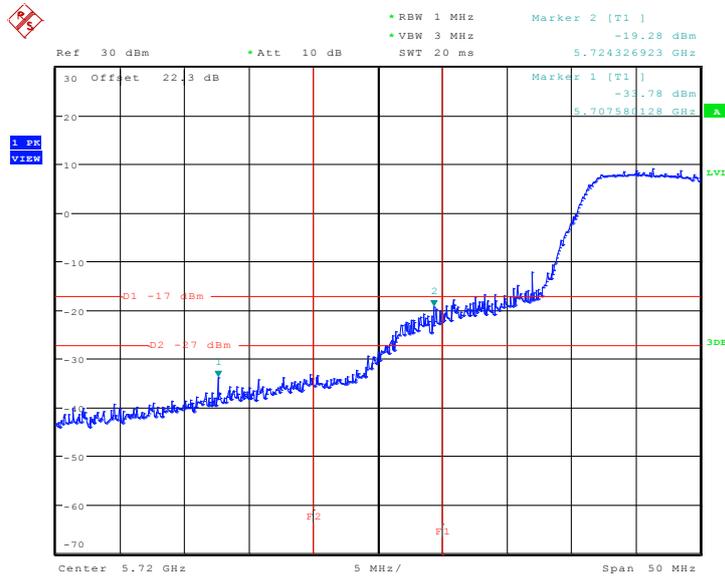


Date: 1.FRR.2015 10:15:50

Fig. 68 Band Edges (802.11n-HT20, 5745MHz)

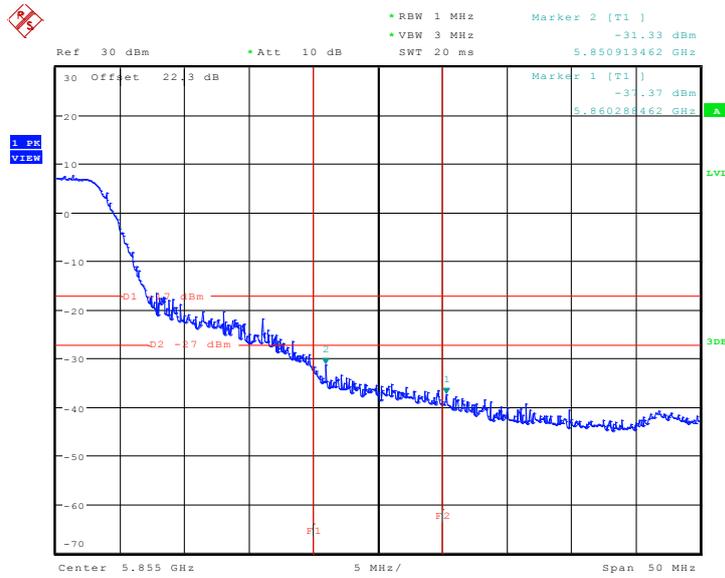


Date: 1.FEB.2015 10:18:42

Fig. 69 Band Edges (802.11n-HT20, 5825MHz)

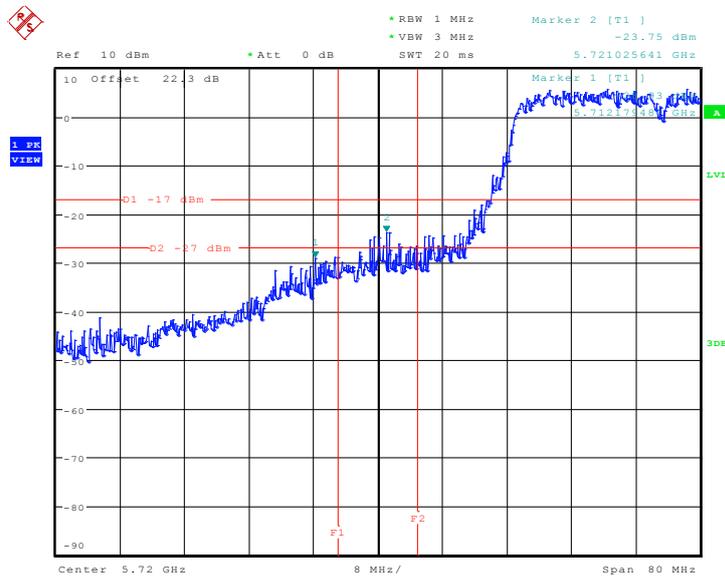

Date: 1.FEB.2015 10:36:11

Fig. 70 Band Edges (802.11n-HT40, 5755MHz)

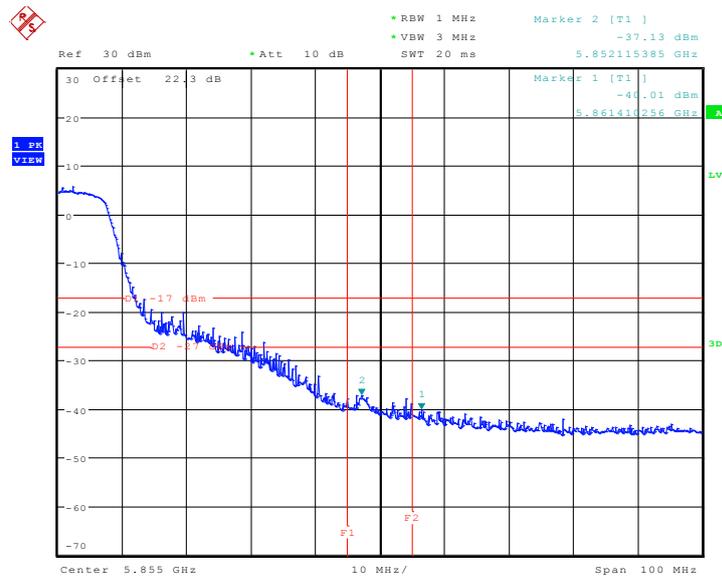

Date: 1.FEB.2015 10:27:20

Fig. 71 Band Edges (802.11n-HT40, 5795MHz)

A6.2 Band Edges - Radiated

Measurement Limit:

Standard	Limit (dB μ V/m)	
	FCC 47 CFR Part 15.407(b)	Peak
	Average	54

The measurement is made according to KDB 789033 D02

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.72	P
	5825 MHz	Fig.73	P
802.11n HT20	5745 MHz	Fig.74	P
	5825 MHz	Fig.75	P
802.11n HT40	5755 MHz	Fig.76	P
	5795 MHz	Fig.77	P

Conclusion: PASS

Test graphs as below:

RE-Power_5.685G-5.765GHz

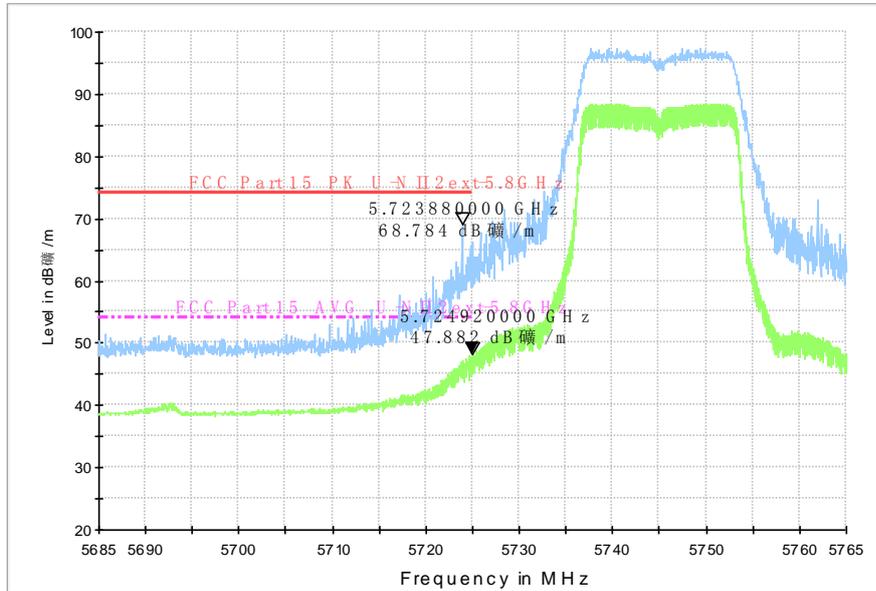


Fig. 72 Band Edges (802.11a, 5745MHz)

RE-Power_5.810G-5.890GHz

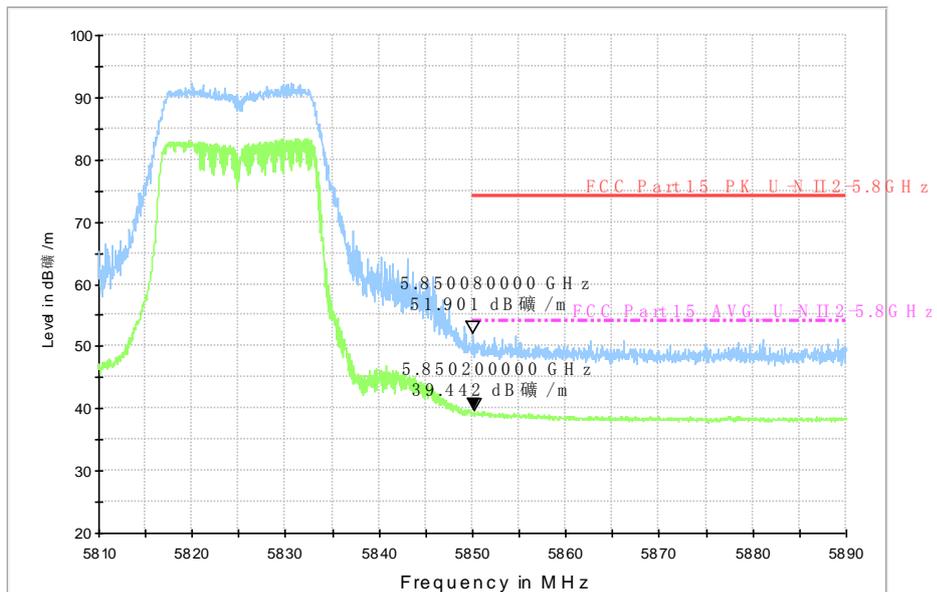


Fig. 73 Band Edges (802.11a, 5825MHz)

RE-Power_5.685G-5.765GHz

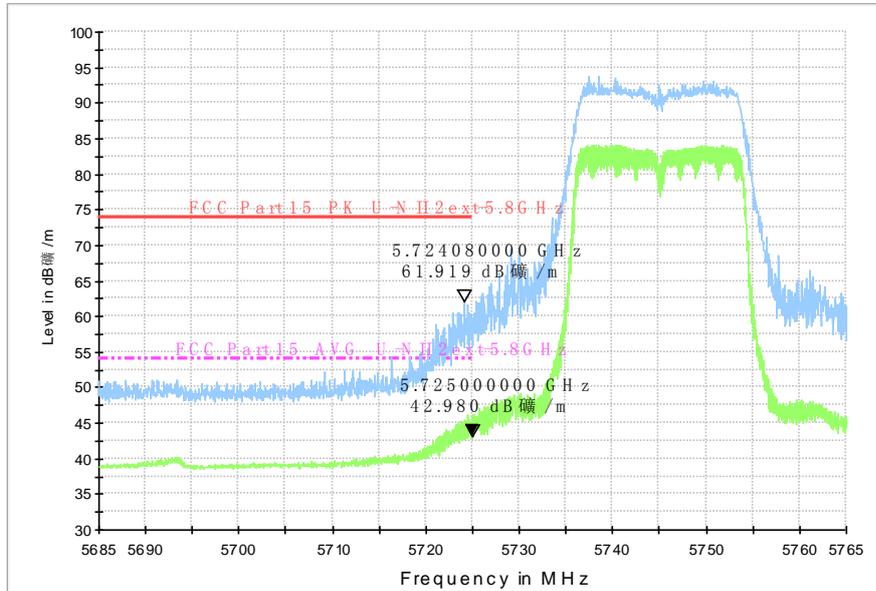


Fig. 74 Band Edges (802.11n-HT20, 5745MHz)

RE-Power_5.810G-5.890GHz

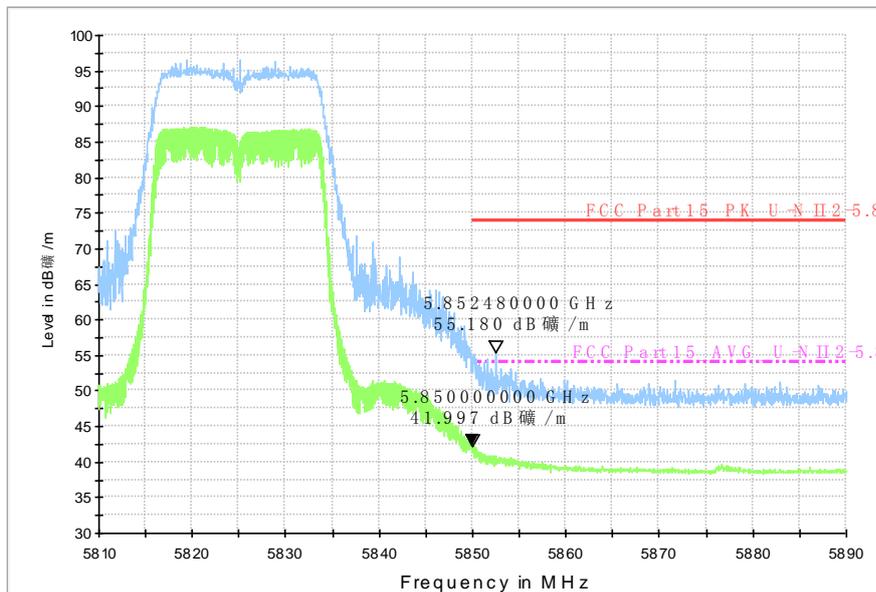


Fig. 75 Band Edges (802.11n-HT20, 5825MHz)

RE-Power_5.685G-5.765GHz

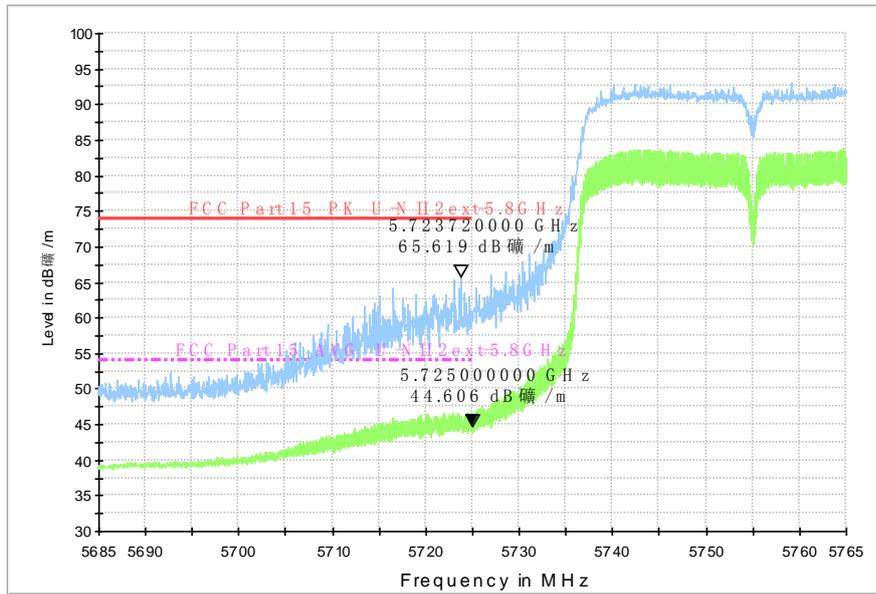


Fig. 76 Band Edges (802.11n-HT40, 5755MHz)

RE-Power_5.810G-5.890GHz

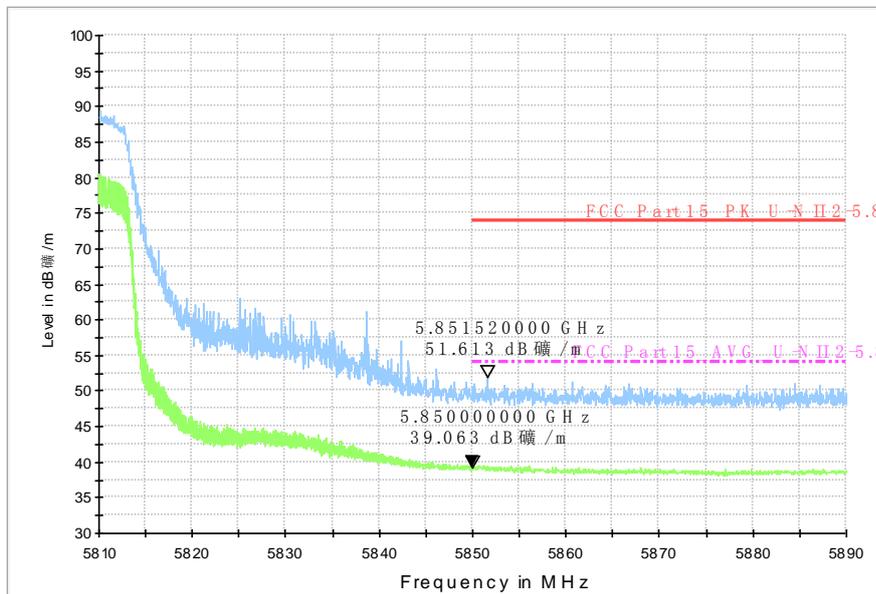


Fig. 77 Band Edges (802.11n-HT40, 5795MHz)

A.7. AC Powerline Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
110	60

Measurement uncertainty:

Expanded measurement uncertainty for this test item is U =3.2dB, k=2.

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	66 to 56	Fig.78	Fig.79	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.78	Fig.79	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10 .

Conclusion: PASS

Test graphs as below:

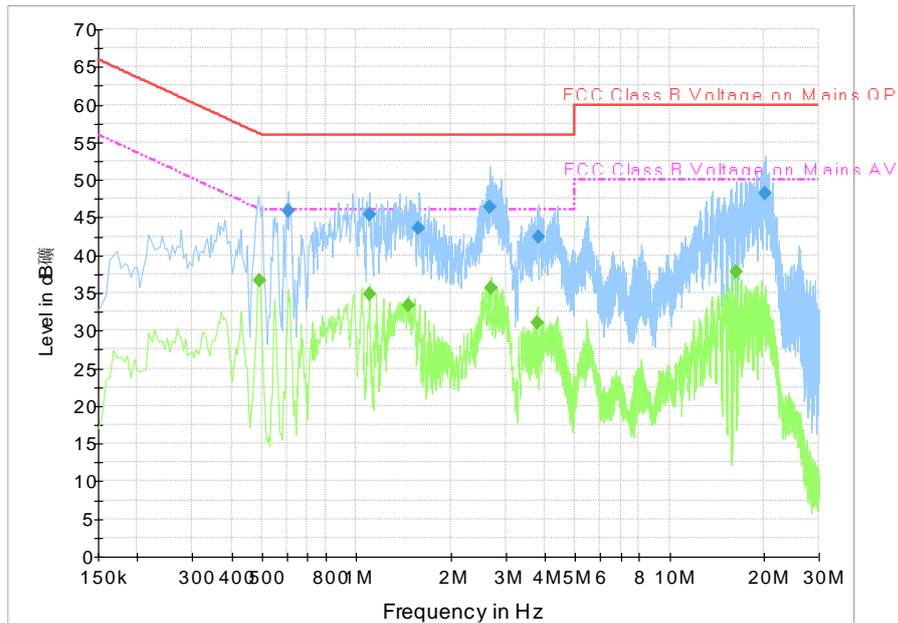


Fig. 78 AC Powerline Conducted Emission-802.11a

Measurement Result 1:

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.604500	45.9	2000.0	9.000	On	L1	19.8	10.1	56.0
1.099500	45.4	2000.0	9.000	On	L1	19.7	10.6	56.0
1.585500	43.6	2000.0	9.000	On	L1	19.7	12.4	56.0
2.679000	46.3	2000.0	9.000	On	L1	19.7	9.7	56.0
3.835500	42.5	2000.0	9.000	On	L1	19.7	13.5	56.0
20.170500	48.2	2000.0	9.000	On	L1	20.0	11.8	60.0

Measurement Result 2:

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.492000	36.6	2000.0	9.000	On	L1	19.8	9.5	46.1
1.099500	34.9	2000.0	9.000	On	L1	19.7	11.1	46.0
1.473000	33.3	2000.0	9.000	On	L1	19.7	12.7	46.0
2.688000	35.7	2000.0	9.000	On	L1	19.7	10.3	46.0
3.790500	31.0	2000.0	9.000	On	L1	19.7	15.0	46.0
16.318500	37.9	2000.0	9.000	On	L1	20.1	12.1	50.0

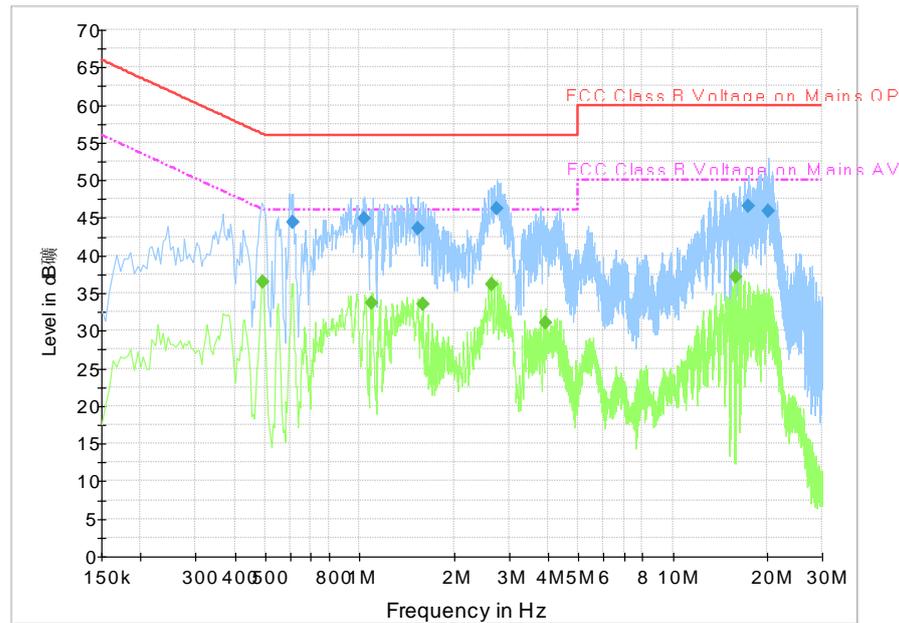


Fig. 79 AC Powerline Conducted Emission-Idle

Measurement Result 1:

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.613500	44.5	2000.0	9.000	On	L1	19.8	11.5	56.0
1.036500	45.0	2000.0	9.000	On	L1	19.7	11.0	56.0
1.531500	43.5	2000.0	9.000	On	L1	19.6	12.5	56.0
2.737500	46.3	2000.0	9.000	On	L1	19.6	9.7	56.0
17.479500	46.5	2000.0	9.000	On	L1	20.1	13.5	60.0
20.166000	45.9	2000.0	9.000	On	L1	20.0	14.1	60.0

Measurement Result 2:

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.492000	36.5	2000.0	9.000	On	L1	19.8	9.6	46.1
1.095000	33.6	2000.0	9.000	On	L1	19.7	12.4	46.0
1.590000	33.5	2000.0	9.000	On	L1	19.7	12.5	46.0
2.634000	36.2	2000.0	9.000	On	L1	19.7	9.8	46.0
3.912000	31.0	2000.0	9.000	On	L1	19.7	15.0	46.0
15.832500	37.1	2000.0	9.000	On	L1	20.1	12.9	50.0

A.8. Spurious Emissions Radiated < 30MHz

Measurement Limit:

Frequency (MHz)	Field strength(dBμV/m)	Measurement distance
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

The measurement is made according to KDB 789033 D02

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Measurement Results:

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	157(5785MHz)	9 kHz ~30 MHz	Fig.80	P

Conclusion: PASS

Test graphs as below:


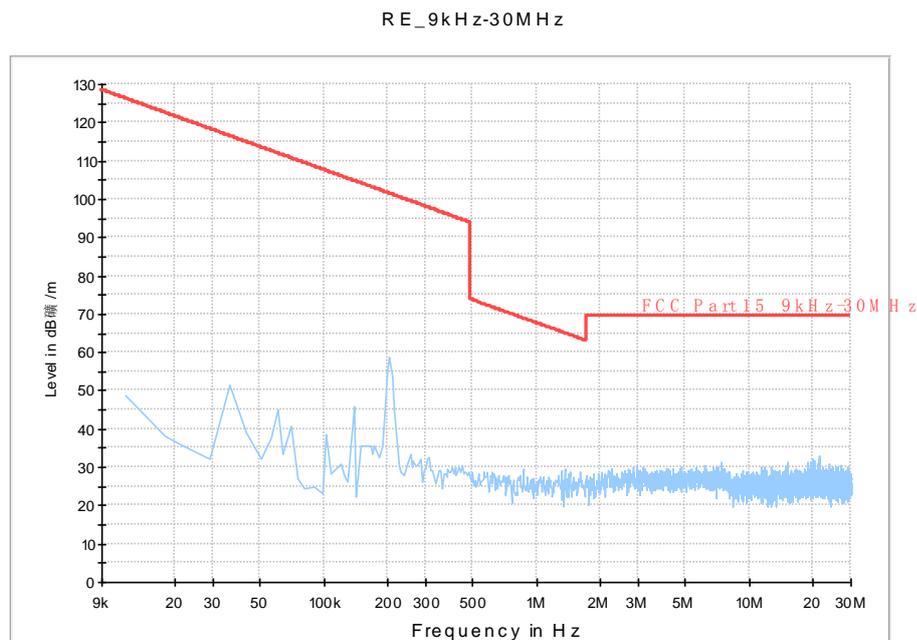


Fig. 80 Radiated Spurious Emission (802.11a, ch157, 9 kHz ~30 MHz)

ANNEX B: PHOTOGRAPHS OF THE TEST SET-UP

Layout of Radiated Spurious Emission Test

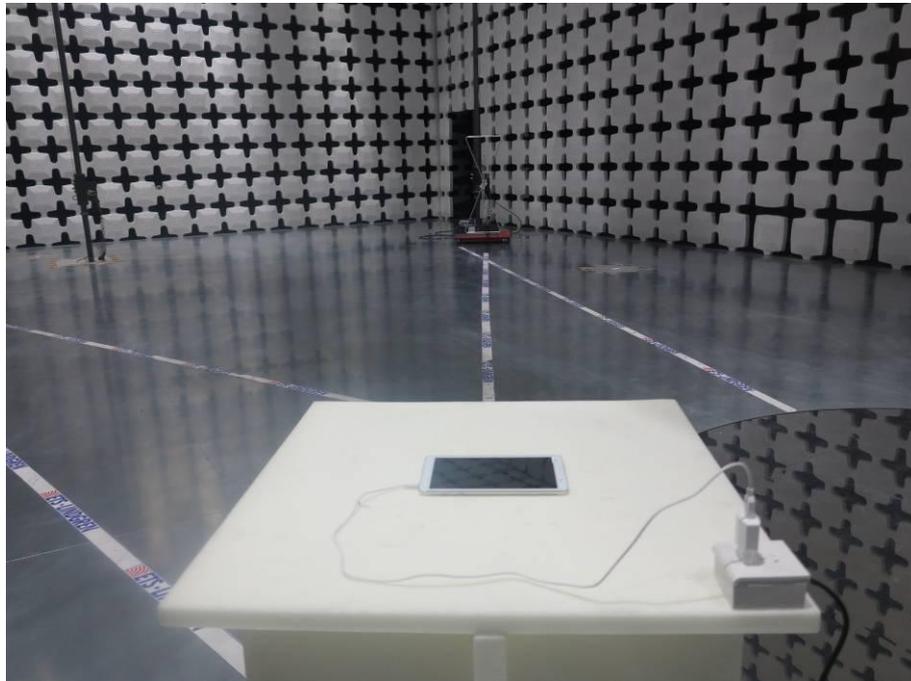

*** END OF REPORT BODY ***