


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

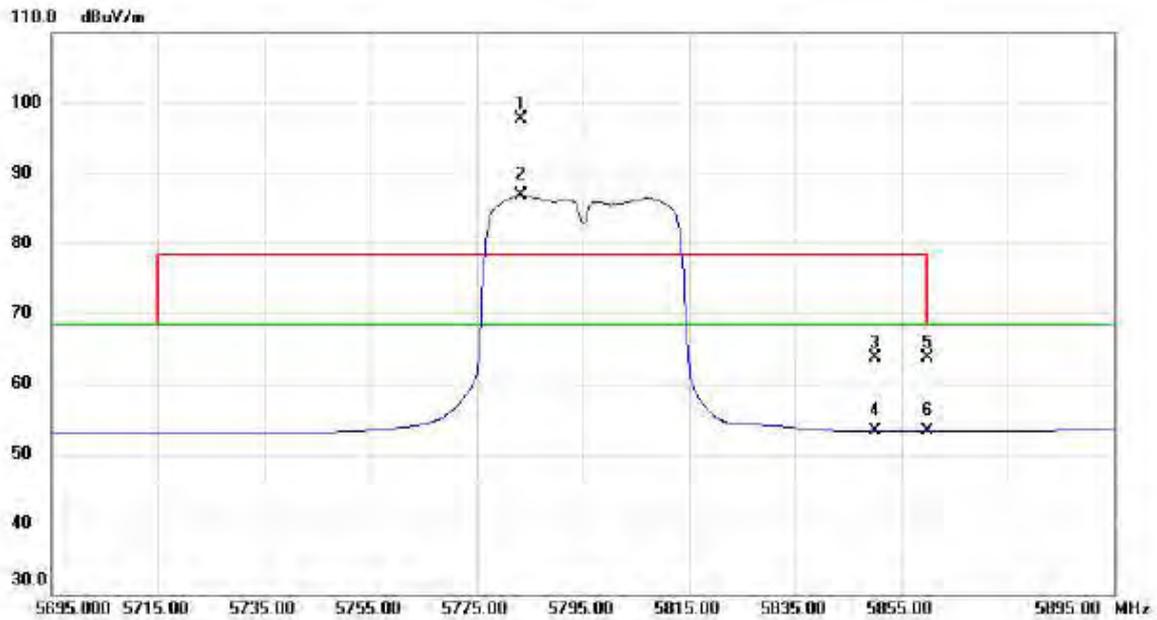


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5783.400	56.86	40.89	97.75	78.30	19.45	peak	No Limit
2	X	5783.400	46.05	40.89	86.94	68.30	18.64	AVG	No Limit
3		5850.000	22.43	41.23	63.66	78.30	-14.64	peak	
4		5850.000	12.01	41.23	53.24	68.30	-15.06	AVG	
5		5860.000	22.33	41.29	63.62	68.30	-4.68	peak	
6		5860.000	11.98	41.29	53.27	68.30	-15.03	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

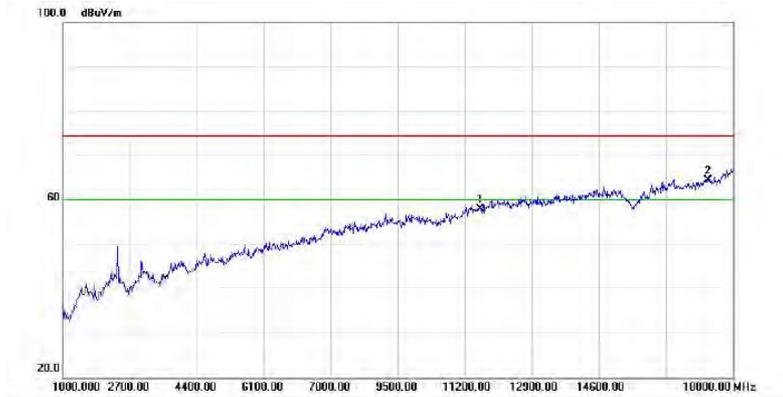

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11590.00	40.76	17.08	57.84	74.30	-16.46	peak	
2 *	17385.00	42.23	22.00	64.23	74.30	-10.07	peak	

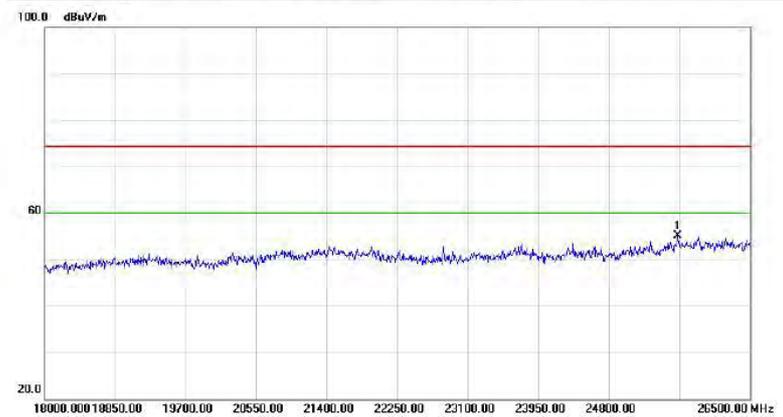

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 *	25633.00	47.68	7.37	55.05	74.30	-19.25	peak	

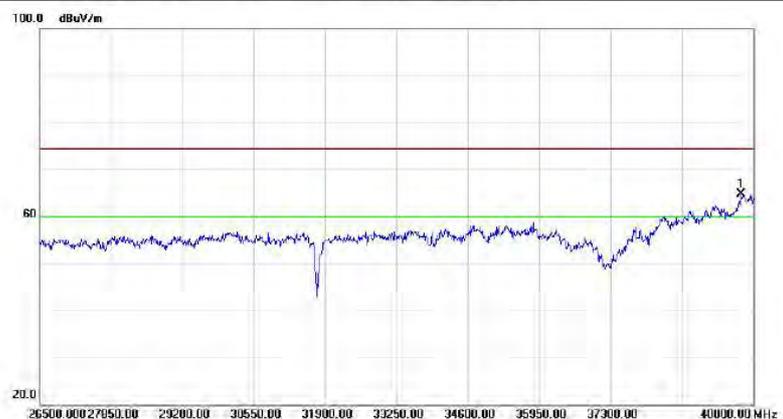

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 *	39770.50	47.65	17.03	64.68	74.30	-9.62	peak	