



NO.: RZA2008-0996FCC



OET 65

TEST REPORT

Test name	Electromagnetic Field (Specific Absorption Rate)
Product	GSM Mobile Telephone
FCC ID	QIST520A
Model	HUAWEI T520
Client	Huawei Technologies Co., Ltd.

TA Technology (Shanghai) Co., Ltd.



GENERAL TERMS

1. The test report is invalid if not marked with “exclusive stamp for the data report” or the stamp of the TA.
2. Any copy of the test report is invalid if not re-marked with the “exclusive stamp for the test report” or the stamp of TA.
3. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
4. The test report is invalid if there is any evidence of erasure and/or falsification.
5. If there is any dissidence for the test report, please file objection to the test center within 15 days from the date of receiving the test report.
6. Normally, entrust test is only responsible for the samples that have undergone the test.
7. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permissions of TA.

Address: Room4,No.399,Cailun Rd,Zhangjiang Hi-Tech Park, Pudong Shanghai,China

Post code: 201203

Telephone: +86-021-50791141/2/3

Fax : +86-021-50791141/2/3-8000

Website: <http://www.ta-shanghai.com>

E-mail: service@ta-shanghai.com

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-0996FCC

Page 3 of 170

GENERAL SUMMARY

Product	GSM Mobile Telephone	Model	HUAWEI T520
Client	Huawei Technologies Co., Ltd.	Type of test	Entrusted
Manufacturer	Huawei Technologies Co., Ltd.	Arrival Date of sample	July.28 th , 2008
Place of sampling	(Blank)	Carrier of the samples	Peng Wang
Quantity of the samples	One	Date of product	(Blank)
Base of the samples	(Blank)	Items of test	SAR
Series number	TC4CAC1870900046		
Standard(s)	<p>EN 50360–2001: Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.</p> <p>BS EN 62209-1:2006: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)</p> <p>ANSI C95.1–2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p>IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.</p> <p>OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.</p> <p>IEC 62209-2 : Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR)in the head and body for 30MHz to 6GHz Handheld and Body-Mounted Devices used in close proximity to the body.</p>		
Conclusion	<p>Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 7.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 7.1 of this test report.</p> <p>General Judgment: Pass</p> <p style="text-align: right;">(Stamp) Date of issue: August. 4th, 2008</p>		
Comment	The test result only responds to the measured sample.		

Approved by 杨伟中
Weizhong Yang

Revised by 凌敏宝
Minbao Ling

Performed by 石峰
feng Shi

TABLE OF CONTENT

1.	COMPETENCE AND WARRANTIES	3
2.	GENERAL CONDITIONS	3
3.	DESCRIPTION OF EUT	3
3.1.	ADDRESSING INFORMATION RELATED TO EUT	3
3.2.	CONSTITUENTS OF EUT	3
3.3.	GENERAL DESCRIPTION	3
3.4.	TEST ITEM	3
4.	OPERATIONAL CONDITIONS DURING TEST	3
4.1.	GENERAL DESCRIPTION OF TEST PROCEDURES	3
4.2.	GSM TEST CONFIGURATION	3
5.	SAR MEASUREMENTS SYSTEM CONFIGURATION	3
5.1.	SAR MEASUREMENT SET-UP	3
5.2.	DASY4 E-FIELD PROBE SYSTEM	3
5.2.1.	ET3DV6 Probe Specification	3
5.2.2.	E-field Probe Calibration	3
5.3.	OTHER TEST EQUIPMENT	3
5.3.1.	Device Holder for Transmitters	3
5.3.2.	Phantom	3
5.4.	SCANNING PROCEDURE	3
5.5.	DATA STORAGE AND EVALUATION	3
5.5.1.	Data Storage	3
5.5.2.	Data Evaluation by SEMCAD	3
5.6.	SYSTEM SPECIFICATIONS	3
5.6.1.	Robotic System Specifications	3
5.7.	SYSTEM VALIDATION	3
5.8.	EQUIVALENT TISSUES	3
6.	LABORATORY ENVIRONMENT	3
7.	CHARACTERISTICS OF THE TEST	3
7.1.	APPLICABLE LIMIT REGULATIONS	3
7.2.	APPLICABLE MEASUREMENT STANDARDS	3
8.	CONDUCTED OUTPUT POWER MEASUREMENT	3
8.1.	SUMMARY	3
8.2.	POWER DRIFT	3
8.3.	CONDUCTED POWER	3
8.3.1.	Measurement Methods	3
8.3.2.	Measurement result	3
9.	TEST RESULTS	3
9.1.	DIELECTRIC PERFORMANCE	3

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-0996FCC

Page 5 of 170

9.2.	SYSTEM VALIDATION RESULTS	3
9.3.	SUMMARY OF MEASUREMENT RESULTS.....	3
9.3.1.	GSM850/GPRS	3
9.3.2.	GSM1900/GPRS	3
9.4.	CONCLUSION	3
10.	MEASUREMENT UNCERTAINTY.....	3
11.	MAIN TEST INSTRUMENTS.....	3
12.	TEST PERIOD.....	3
13.	TEST LOCATION	3
ANNEX A : MEASUREMENT PROCESS.....		3
ANNEX B : TEST LAYOUT		3
ANNEX C : GRAPH RESULTS.....		3
ANNEX D : SYSTEM VALIDATION RESULTS		3
ANNEX E : PROBE CALIBRATION CERTIFICATE.....		3
ANNEX F : D835V2 DIPOLE CALIBRATION CERTIFICATE.....		3
ANNEX G : D1900V2 DIPOLE CALIBRATION CERTIFICATE		3
ANNEX H : DAE4 CALIBRATION CERTIFICATE.....		3
ANNEX I : THE EUT APPEARANCES AND TEST CONFIGURATION		3

1. COMPETENCE AND WARRANTIES

TA Technology (Shanghai) Co., Ltd. is a test laboratory competent to carry out the tests described in this test report.

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test.

2. GENERAL CONDITIONS

This report only refers to the item that has undergone the test.

This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This document is only valid if complete; no partial reproduction can be made without written approval of **TA Technology (Shanghai) Co., Ltd.**

This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

TA Technology (Shanghai) Co., Ltd.

Test Report

No. RZA2008-0996FCC

Page 7 of 170

3. DESCRIPTION OF EUT

3.1. Addressing Information Related to EUT

Table 1: Applicant (The Client)

Name or Company	Huawei Technologies Co., Ltd.
Address/Post	Bantian, Longgang District
City	Shenzhen
Postal Code	518129
Country	P.R. China
Telephone	0755-28780808
Fax	0755-28780808

Table 2: Manufacturer

Name or Company	Huawei Technologies Co., Ltd.
Address/Post	Bantian, Longgang District
City	Shenzhen
Postal Code	518129
Country	P.R. China
Telephone	0755-28780808
Fax	0755-28780808

3.2. Constituents of EUT

Table 3: Constituents of Samples

Description	Model	Serial Number	Manufacturer
Handset	HUAWEI T520	TC4CAC1870900046	Huawei Technologies Co.,Ltd.
Lithium Battery	H8C80S	BYD832502028	Huawei Technologies Co.,Ltd.
AC/DC Adapter	TPCA-053065UY	TP17B0582951	Huawei Technologies Co.,Ltd.

Note:

The EUT appearances see ANNEX I.

3.3. General Description

Equipment Under Test (EUT) is a model of GSM Mobile Telephone with internal antenna. It consists of Handset, Lithium Battery and AC/DC Adapter. The detail about Mobile phone, Lithium Battery and AC/DC Adapter is in Table 3. SAR is tested for GSM 850, GSM 1900. It has the GPRS function, the GPRS class is 10.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-0996FCC

Page 8 of 170

3.4. Test item

Table 4: Test item of EUT

Device type :	portable device	
Exposure category:	uncontrolled environment / general population	
Device operating configurations :		
Operating mode(s):	GSM850; (tested) GSM1900; (tested) GSM900; GSM1800;	
Modulation:	GMSK	
GPRS mobile station class :	B	
GPRS multislots class :	10	
EGPRS multislots class:	---	
Maximum no.of timeslots in uplink:	2	
Standard output power	(33dBm,2W)GSM850; (tested) (33dBm,2W)GSM900; (30dBm,1W)GSM1800; (30dBm,1W)GSM1900; (tested)	
Operating frequency range(s)	transmitter frequency range	receiver frequency range
GSM850: (tested):	824.2 MHz ~ 848.8 MHz	869.2 MHz ~ 893.8 MHz
GSM900:	880.2 MHz ~ 914.8 MHz	925.2 MHz ~ 959.8 MHz
GSM1800:	1710.2 MHz ~ 1784.8 MHz	1805.2 MHz ~ 1879.8 MHz
GSM1900: (tested):	1850.2 MHz ~ 1909.8 MHz	1930.2 MHz ~ 1989.8 MHz
Power class	GSM 850: 4, tested with power level 5	
	GSM 900: 4, tested with power level 5	
	GSM 1800: 1, tested with power level 0	
	GSM 1900: 1, tested with power level 0	
Test channel (Low –Middle –High)	128 -192 – 251 (GSM850) (tested) 975 -38 – 124 (GSM900) 512 - 700 – 885 (GSM1800) 512 - 661 – 810 (GSM1900) (tested)	
Hardware version:	VER.C	
Software version:	---	
Antenna type:	integrated antenna	

4. OPERATIONAL CONDITIONS DURING TEST

4.1. General description of test procedures

The EUT is tested using a E5515C communications tester as controller unit to set test channels and maximum output power to the EUT, as well as for measuring the conducted peak power. Test positions as described in ANNEX I are in accordance with the specified test standard. Conducted output power was measured using an integrated RF connector and attached RF cable.

To make the mobile emits maximum power; the output power of E5515C would be adjusted to minimum power with the sensitivity of the mobile station to build steady connection with mobile station. The power level control parameter "5" of GSM850 ,"0" of GSM1900.They mean that requires mobile station to emit with maximum power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 30 dB.

4.2. GSM Test Configuration

SAR tests for GSM 850 , GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using E5515C the power lever is set to"5" in head SAR and body SAR of GSM850, is set to"0" in head SAR and body SAR of GSM1900,The test in the band of GSM 850 and GSM1900 are performed in the mode of speech transfer function and GPRS. And since the GPRS class is 10 for this EUT, it has at most 2 timeslots in uplink.

5. SAR MEASUREMENTS SYSTEM CONFIGURATION

5.1. SAR Measurement Set-up

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m) which positions the probes with a positional repeatability of better than $\pm 0.02\text{mm}$. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length = 300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teaches pendant (Joystick) and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2003 system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, meCHanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

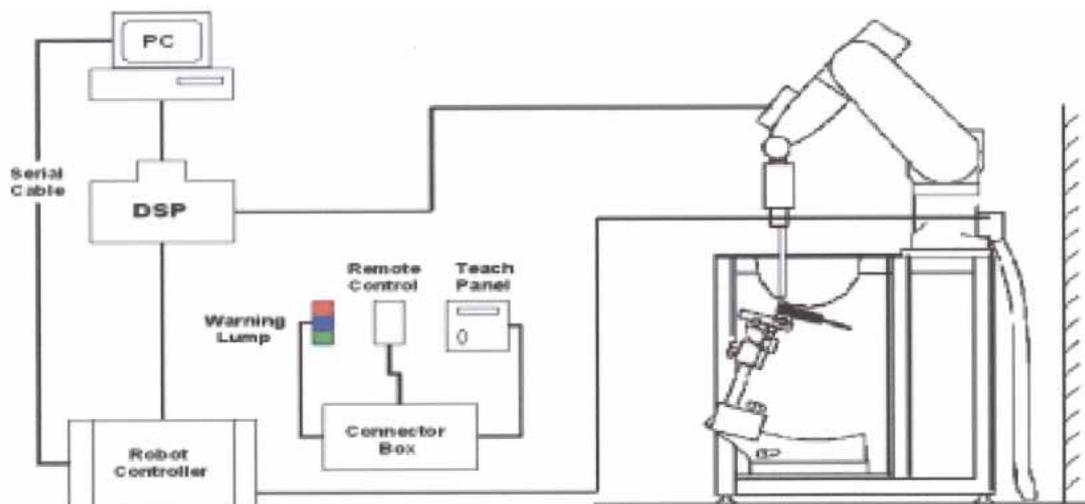


Figure 1. SAR Lab Test Measurement Set-up

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

5.2. Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the standard procedure with an accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$.

5.2.1. ET3DV6 Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System (ET3DV6 only) Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.q., glycol)
Calibration	In air from 10 MHz to 2.5 GHz In brain and muscle simulating tissue at frequencies of 900MHz, 1750MHz, 1950MHz and 2450MHz (accuracy $\pm 8\%$) Calibration for other liquids and frequencies upon request
Frequency	10MHz to 2.5 GHz; Linearity: ± 0.2 dB (30 MHz to 2.5 GHz)
Directivity	± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation around probe axis)
Dynamic Range	5u W/g to > 100mW/g; Linearity: $\pm 0.2\text{dB}$
Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surface
Dimensions	Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm Distance from probe tip to dipole centers: 2.7mm
Application	General dosimetry up to 2.5GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

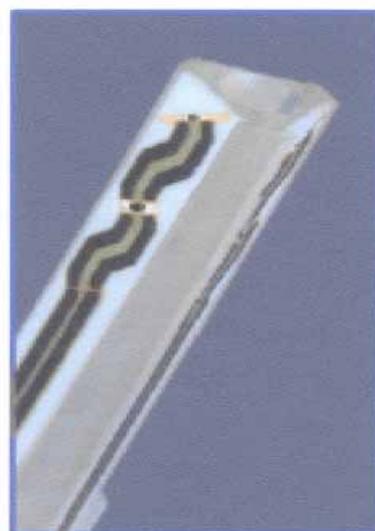


Figure 2. ET3DV6 E-field Probe

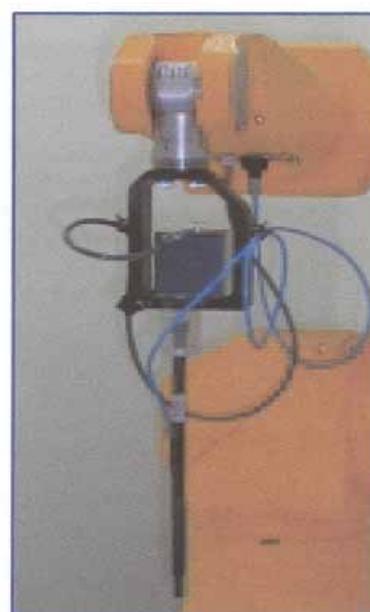


Figure 3. ET3DV6 E-field probe

5.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test Chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

5.3. Other Test Equipment

5.3.1. Device Holder for Transmitters

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Figure 4. Device Holder

5.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



Figure 5. Generic Twin Phantom

5.4. Scanning procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The "reference" and "drift" measurements are located at the beginning and end of the batch process.
They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. +/- 5 %.
- The "surface check" measurement tests the optical surface detection system of the DASY4 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The "area scan" measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension. If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.
- A "7x7x7 zoom scan" measures the field in a volume around the 2D peak SAR value acquired in the previous "coarse" scan. This is a fine 7x7 grid where the robot additionally moves the probe in 7 steps along the z-axis away from the bottom of the Phantom. Grid spacing for the cube measurement is 5mm in x and y-direction and 5 mm in z-direction. DASY4 is also able to perform repeated zoom scans if more than 1 peak is found during area scan.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2mm steps.

5.5. Data Storage and Evaluation

5.5.1. Data Storage

The DASY4 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai ₀ , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	Dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-0996FCC

Page 16 of 170

peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With V_i = compensated signal of channel i (i = x, y, z)

$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

5.6. System Specifications

5.6.1. Robotic System Specifications

Specifications

Positioner: Stäubli Unimation Corp. Robot Model: RX90L

Repeatability: ±0.02 mm

No. of Axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: Pentium III

Clock Speed: 800 MHz

Operating System: Windows 2003

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic

Software: DASY4 software

Connecting Lines: Optical downlink for data and status info. Optical uplink for commands and clock.

5.7. System validation

System validation is performed by using a validation dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 1000 mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the validation to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test.

Validation results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System validation is performed regularly on all frequency bands where tests are performed with the DASY 4 system. Results are stored to have a long time overview of system performance and are shown in test reports at request.

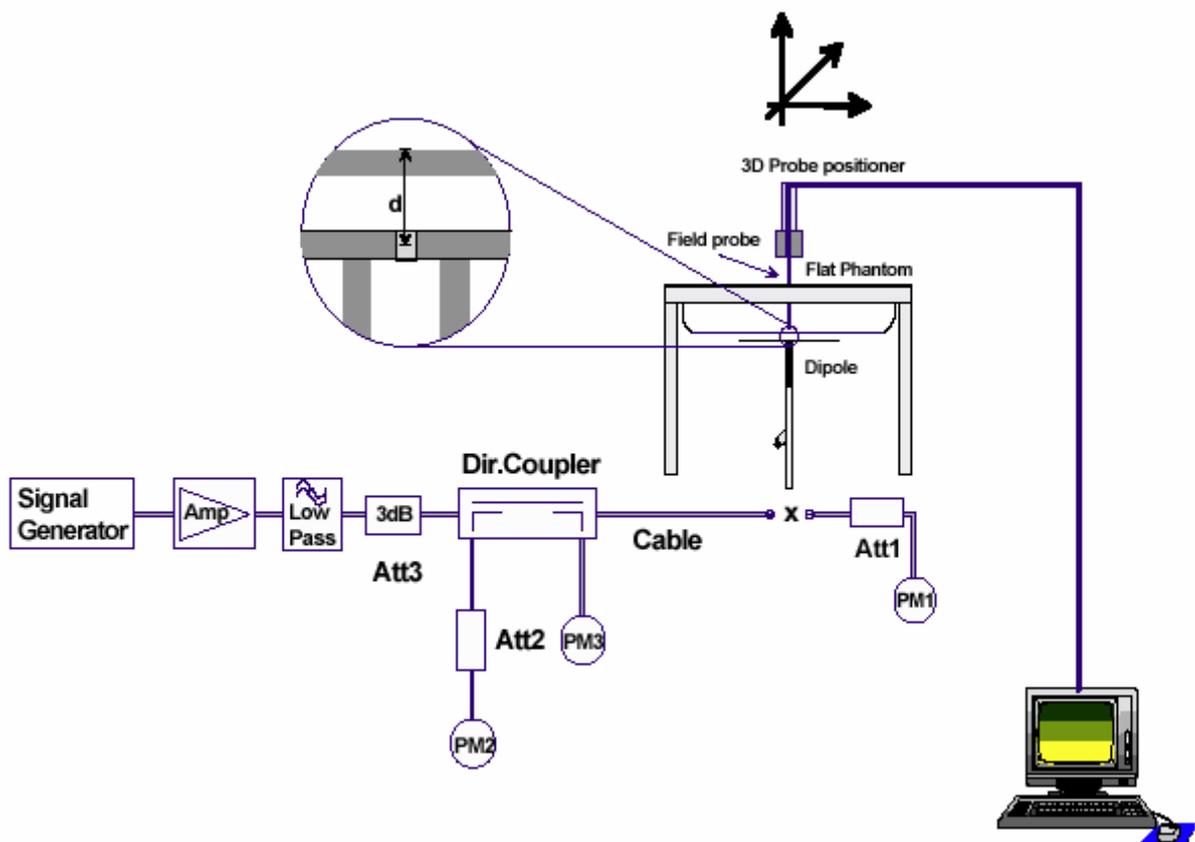


Figure 6. System validation Set-up

5.8. Equivalent Tissues

The liquid used for the frequency range of 800-2000 MHz consisted of water, sugar, salt, Preventol, Glycol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 5 and Table 6 show the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528.

Table 5: Composition of the Head Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Brain) 835MHz
Water	41.45
Sugar	56
Salt	1.45
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=41.5$ $\sigma=0.9$

MIXTURE%	FREQUENCY(Brain) 1900MHz
Water	55.242
Glycol	44.452
Salt	0.306
Dielectric Parameters Target Value	f=1900MHz $\epsilon=40.0$ $\sigma=1.40$

Table 6: Composition of the Body Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Body)835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

MIXTURE%	FREQUENCY(Body)1900MHz
Water	69.91
Glycol	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

6. LABORATORY ENVIRONMENT

Table 7: The Ambient Conditions during Test

Temperature	Min. = 20°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

7. CHARACTERISTICS OF THE TEST

7.1. Applicable Limit Regulations

EN 50360–2001: Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

It specifies the maximum exposure limit of 2.0 W/kg as averaged over any 10 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

ANSI C95.1–2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

7.2. Applicable Measurement Standards

BS EN 62209-1:2006: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.

IEC 62209-2: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR) in the head and body for 30MHz to 6GHz Handheld and Body-Mounted Devices used in close proximity to the body.

8. CONDUCTED OUTPUT POWER MEASUREMENT

8.1. Summary

During the process of testing, the EUT was controlled via Digital Radio Communication tester to ensure the maximum power transmission and proper modulation. This result contains conducted output power and ERP for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

8.2. Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 12 to Table 15 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 0.21dB.

TA Technology (Shanghai) Co., Ltd.
Test Report

8.3. Conducted Power

8.3.1. Measurement Methods

The EUT was set up for the maximum output power. The channel power was measured .The measurements were done both before and after SAR tests for each test band.

8.3.2. Measurement result

Table 8: Conducted Power Measurement Results

GSM 850	Conducted Power		
	Channel 128 (824.2MHz)	Channel 192 (836.6MHz)	Channel 251 (848.8MHz)
Before Test (dBm)	31.92	32.08	32.17
After Test (dBm)	31.95	32.10	32.21
GSM 850+GPRS	Conducted Power		
	Channel 128 (824.2MHz)	Channel 192 (836.6MHz)	Channel 251 (848.8MHz)
Before Test (dBm)	32.04	32.12	32.25
After Test (dBm)	32.10	32.14	32.29
GSM 1900	Conducted Power		
	Channel 512 (1850.2MHz)	Channel 661 (1880MHz)	Channel 810 (1909.8MHz)
Before Test (dBm)	29.14	29.22	29.31
After Test (dBm)	29.10	29.18	29.33
GSM 1900+GPRS	Conducted Power		
	Channel 512 (1850.2MHz)	Channel 661 (1880MHz)	Channel 810 (1909.8MHz)
re Test (dBm)	29.24	29.30	29.34
After Test (dBm)	29.11	29.24	29.27

9. TEST RESULTS

9.1. Dielectric Performance

Table 9: Dielectric Performance of Head Tissue Simulating Liquid

Measurement is made at temperature 22.5 °C and relative humidity 51%. Liquid temperature during the test: 22.3°C					
Frequency (MHz)		Target value	Measurement value	Difference percentage	
835 (Brain)	Permittivity ϵ_r	41.50	42.69	2.87	%
	Conductivity σ	0.90	0.93	3.33	%
1900 (Brain)	Permittivity ϵ_r	40.00	39.99	0.03	%
	Conductivity σ	1.40	1.44	2.86	%

Table 10: Dielectric Performance of Body Tissue Simulating Liquid

Measurement is made at temperature 22.5 °C and relative humidity 51%. Liquid temperature during the test: 22.3°C					
Frequency (MHz)		Target value	Measurement value	Difference percentage	
835 (Body)	Permittivity ϵ_r	55.20	55.60	0.72	%
	Conductivity σ	0.97	1.01	4.12	%
1900 (Body)	Permittivity ϵ_r	53.30	53.05	0.47	%
	Conductivity σ	1.52	1.52	0.00	%

9.2. System Validation Results

Table 11: System Validation

Measurement is made at temperature 23.2 °C, relative humidity 50%, and input power 250 mW. Liquid temperature during the test: 22.3°C							
Liquid parameters	Frequency	Permittivity ϵ		Conductivity σ (S/m)			
	835MHz	42.69		0.93			
	1900MHz	39.99		1.44			
Verification results	Frequency	Target value (W/kg)		Measurement value (W/kg)		Difference percentage	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
	835MHz	1.56	2.43	1.53	2.34	-1.92%	-3.70%
	1900MHz	4.98	9.45	4.93	9.36	-1.00%	-1.06%

Note :

1. Target Values used derive from the SPEAG calibration certificate and 250 mW is used as feeding power to the validation dipole (SPEAG using).
2. The graph results see ANNEX D.

TA Technology (Shanghai) Co., Ltd.
Test Report

9.3. Summary of Measurement Results

9.3.1. GSM850/GPRS

Table 12: SAR Values (GSM850, Head)

Liquid Temperature: 22.5					
Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Head		Measurement Result(W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
Left hand, Touch cheek	High	0.679	1.010	0.015	Figure 8
	Middle	0.758	1.130	-0.052	Figure 10
	Low	0.681	1.010	-0.109	Figure 12
Left hand, Tilt 15 Degree	High	0.361	0.527	0.029	Figure 14
	Middle	0.401	0.582	-0.088	Figure 16
	Low	0.372	0.538	-0.122	Figure 18
Right hand, Touch cheek	High	0.626	0.933	-0.059	Figure 20
	Middle	0.693	1.030	-0.106	Figure 22
	Low	0.606	0.900	-0.107	Figure 24
Right hand, Tilt 15 Degree	High	0.347	0.508	0.011	Figure 26
	Middle	0.382	0.559	-0.072	Figure 28
	Low	0.347	0.505	-0.085	Figure 30

Note: 1.The value with blue color is the maximum SAR Value of each test band.

TA Technology (Shanghai) Co., Ltd.
Test Report

Table 13: SAR Values (GSM850/GPRS, Body, Distance 20mm)

Liquid Temperature: 22.5					
Limit of SAR (W/kg)		10 g	1 g	Power	Graph Results
		Average	Average	Drift (dB)	
Test Case Of Body		Measurement Result (W/kg)		Power Drift (dB)	
		10 g	1 g		
Different Test Position	Channel	Average	Average		
Towards Ground	High	0.284	0.393	-0.024	Figure 32
	Middle	0.333	0.460	-0.039	Figure 34
	Low	0.377	0.519	-0.130	Figure 36
Towards Phantom	High	0.169	0.237	-0.012	Figure 38
	Middle	0.195	0.271	-0.046	Figure 40
	Low	0.169	0.235	-0.041	Figure 42
Worst case position of Body with Earphone					
Towards Ground	Low	0.301	0.414	-0.021	Figure 44
Test Case of Body with GPRS(2 timeslots in uplink)					
Towards Ground	High	0.566	0.783	-0.042	Figure 46
	Middle	0.654	0.900	-0.004	Figure 48
	Low	0.720	0.991	0.066	Figure 50
Towards Phantom	High	0.345	0.482	0.001	Figure 52
	Middle	0.394	0.550	-0.031	Figure 54
	Low	0.338	0.468	-0.117	Figure 56

Note: 1. Tests in body position were performed with 20 mm air gap between DUT and Phantom to simulate the use of a non-metallic belt-clip or holster.

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-0996FCC

Page 26 of 170

9.3.2. GSM1900/GPRS

Table 14: SAR Values (GSM1900, Head)

Liquid Temperature: 22.5					
Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Head		Measurement Result(W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
Left hand, Touch cheek	High	0.210	0.380	-0.025	Figure 58
	Middle	0.257	0.464	-0.036	Figure 60
	Low	0.184	0.333	-0.024	Figure 62
Left hand, Tilt 15 Degree	High	0.210	0.394	-0.040	Figure 64
	Middle	0.262	0.492	-0.022	Figure 66
	Low	0.211	0.391	-0.145	Figure 68
Right hand, Touch cheek	High	0.246	0.470	-0.044	Figure 70
	Middle	0.295	0.566	-0.056	Figure 72
	Low	0.212	0.405	-0.003	Figure 74
Right hand, Tilt 15 Degree	High	0.235	0.448	-0.005	Figure 76
	Middle	0.294	0.560	0.005	Figure 78
	Low	0.226	0.428	-0.061	Figure 80

Note: 1.The value with blue color is the maximum SAR Value of each test band.

TA Technology (Shanghai) Co., Ltd.
Test Report

Table 15: SAR Values (GSM1900/GPRS, Body, Distance 20mm)

Liquid Temperature: 22.5					
Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Body		Measurement Result (W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel	10 g Average	1 g Average	Power Drift (dB)	Graph Results
Towards Ground	High	0.204	0.322	0.039	Figure 82
	Middle	0.229	0.356	-0.026	Figure 84
	Low	0.189	0.291	-0.015	Figure 86
Towards Phantom	High	0.057	0.091	0.015	Figure 88
	Middle	0.070	0.111	0.017	Figure 90
	Low	0.056	0.088	-0.012	Figure 92
Worst case position of Body with Earphone					
Towards Ground	Middle	0.117	0.181	-0.015	Figure 94
Test Case of Body with GPRS(2 timeslots in uplink)					
Towards Ground	High	0.267	0.417	-0.011	Figure 96
	Middle	0.304	0.470	-0.023	Figure 98
	Low	0.232	0.356	-0.004	Figure 100
Towards Phantom	High	0.102	0.162	0.073	Figure 102
	Middle	0.125	0.197	0.039	Figure 104
	Low	0.100	0.156	-0.029	Figure 106

Note: 1. Tests in body position were performed with 20 mm air gap between DUT and Phantom to simulate the use of a non-metallic belt-clip or holster.

9.4. Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 7.2 of this report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 7.1 of this test report.

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-0996FCC

Page 28 of 170

10. MEASUREMENT UNCERTAINTY

No.	a	Type	c	d	e=f(d, k)	f	h=cxf / e	k
	Uncertainty Component		Tol. (±%)	Prob. Dist	Div.	c ₁ (1g)	1g u (± %)	v ₁
1	System repetivity	A	0.5	N	1	1	0.5	9
Measurement system								
2	Probe Calibration	B	5	N	2	1	2.5	∞
3	Axial isotropy	B	4.7	R	$\sqrt{3}$	$(1-c_p)^{1/2}$	4.3	∞
4	Hemisphere Isotropy	B	9.4	R	$\sqrt{3}$	$\sqrt{C_P}$		∞
5	Boundary Effect	B	0.4	R	$\sqrt{3}$	1	0.23	∞
6	Linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
7	System Detection Limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
8	Readout Electronics	B	1.0	N	1	1	1.0	∞
9	RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
10	Probe Positioner Mechanical Tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
11	Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
12	Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Test Sample Related								
13	Test Sample Positioning	A	4.9	N	1	1	4.9	N-1
14	Device Holder Uncertainty	A	6.1	N	1	1	6.1	N-1
15	Output Power Variation-SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
Phantom and Tissue Parameters								
16	Phantom Uncertainty(shape and thickness tolerances)	B	1.0	R	$\sqrt{3}$	1	0.6	∞
17	Liquid Conductivity-deviation from target values	B	5.0	R	$\sqrt{3}$	0.64	1.7	∞
18	Liquid Conductivity-measurement uncertainty	B	5.0	N	1	0.64	1.7	M
19	Liquid Permittivity-deviation from target values	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
20	Liquid Permittivity- measurement uncertainty	B	5.0	N	1	0.6	1.7	M
Combined Standard Uncertainty					RSS		11.25	
Expanded Uncertainty (95 % CONFIDENCE INTERVAL)					K=2		22.5	

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-0996FCC

Page 29 of 170

11. MAIN TEST INSTRUMENTS

Table 16: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 15, 2007	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 14, 2008	One year
04	Power sensor	Agilent 8481H	MY41091316	March 14, 2008	One year
05	Signal Generator	HP 8341B	2730A00804	September 15, 2007	One year
06	Amplifier	IXA-020	0401	No Calibration Requested	
07	BTS	E5515C	GB46490218	September 15, 2007	One year
08	E-field Probe	ET3DV6	1531	January 29, 2008	One year
09	DAE	DAE4	679	May 21, 2008	One year
10	Validation Kit 1900MHz	D1900V2	5d018	March 21, 2008	One year
11	Validation Kit 835MHz	D835V2	443	December 9, 2007	One year

12. TEST PERIOD

The test is performed from July 29, 2008 to August 3, 2008.

13. TEST LOCATION

The test is performed at TA Technology (Shanghai) Co., Ltd.

*****END OF REPORT BODY*****

ANNEX A : MEASUREMENT PROCESS

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point was measured and was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15 mm x 15 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point, a volume of 32 mm x 32 mm x 34 mm was assessed by measuring 7 x 7 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

- a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
- c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation is repeated.


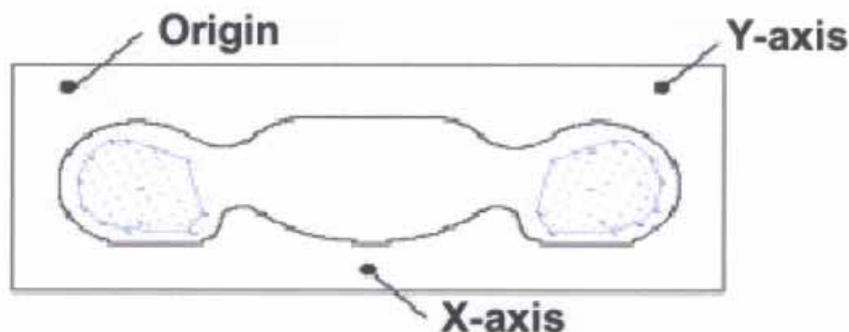


Figure 7 SAR Measurement Points in Area Scan

ANNEX B : TEST LAYOUT




Picture 1: Specific Absorption Rate Test Layout

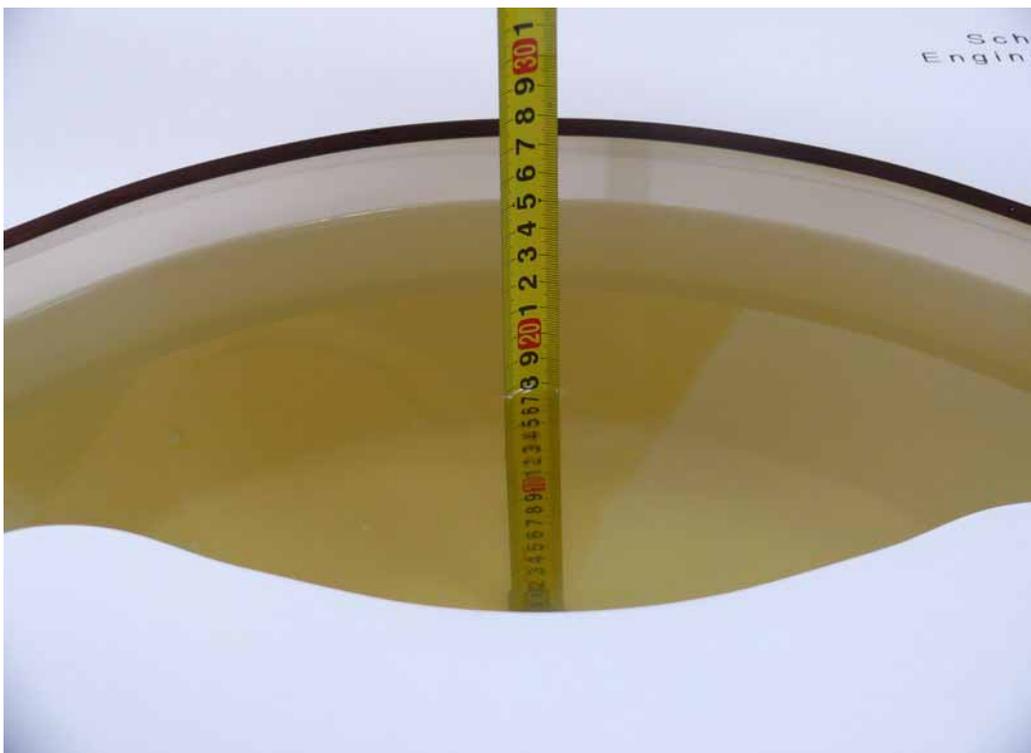

Picture 2: Liquid depth in the Phantom (835MHz)



Picture 3: Liquid depth in the head Phantom (835MHz)

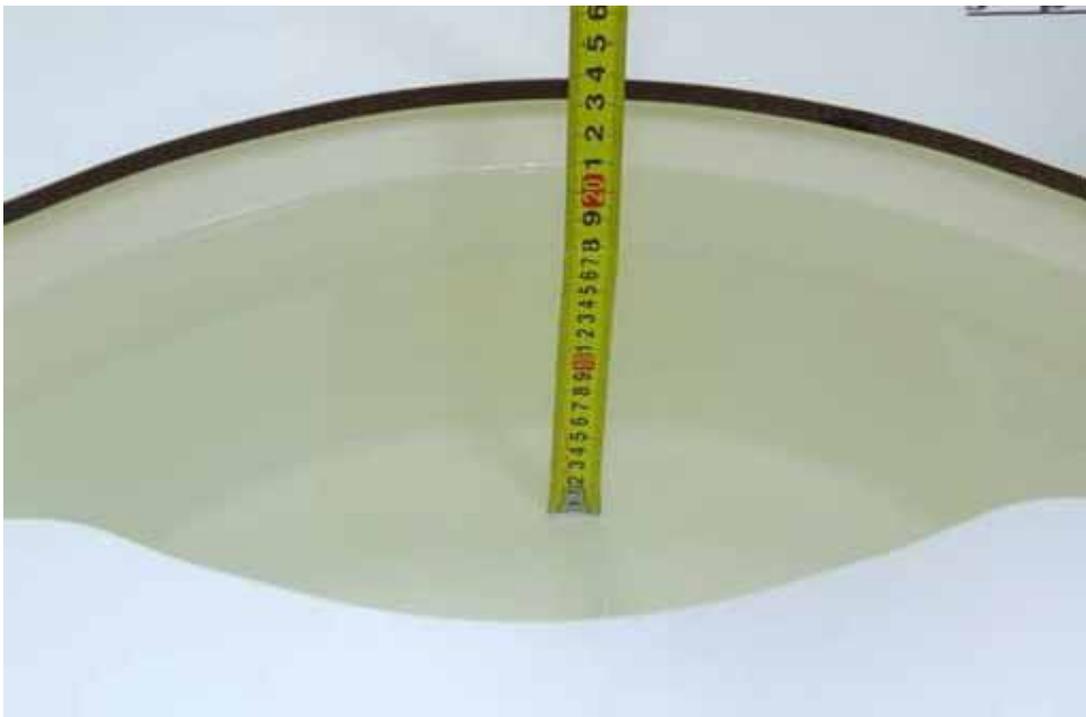

Picture 4: Liquid depth in the Phantom (1900 MHz)



Picture 5: liquid depth in the head Phantom (1900 MHz)

ANNEX C : GRAPH RESULTS

GSM 850 Left Cheek High

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 849$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.85, 6.85, 6.85);

Electronics: DAE4 Sn679;

Cheek High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.9 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.679 mW/g

Maximum value of SAR (measured) = 1.10 mW/g

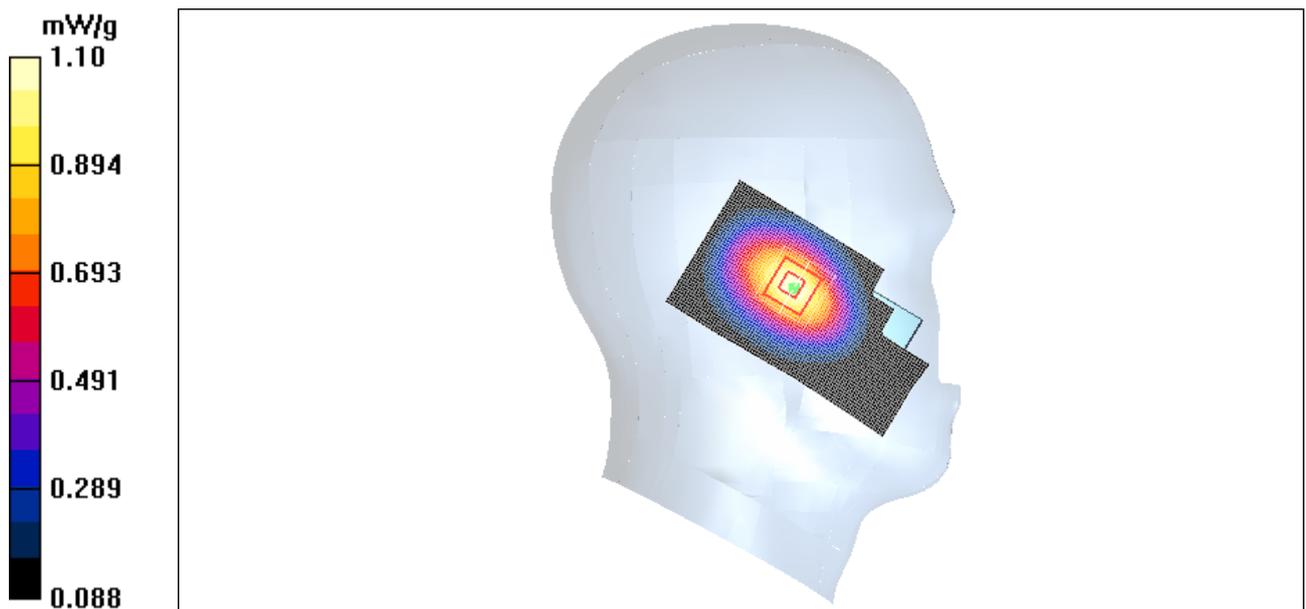


Figure 8 Left Hand Touch Cheek GSM 850 Channel 251

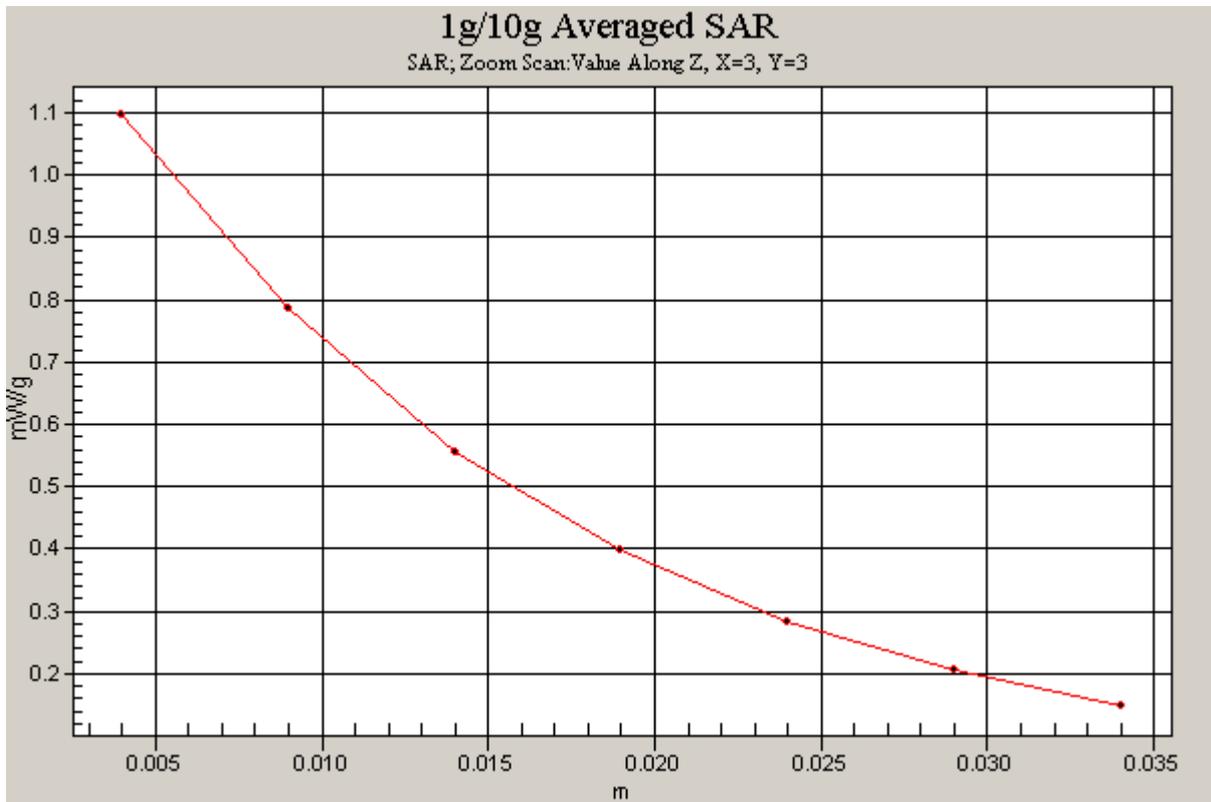


Figure 9 Z-Scan at power reference point (Left Hand Touch Cheek GSM 850 Channel 251)

GSM 850 Left Cheek Middle

Communication System: GSM 850; Frequency: 837 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.934$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.85, 6.85, 6.85);

Electronics: DAE4 Sn679;

Cheek Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.24 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.9 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.758 mW/g

Maximum value of SAR (measured) = 1.21 mW/g

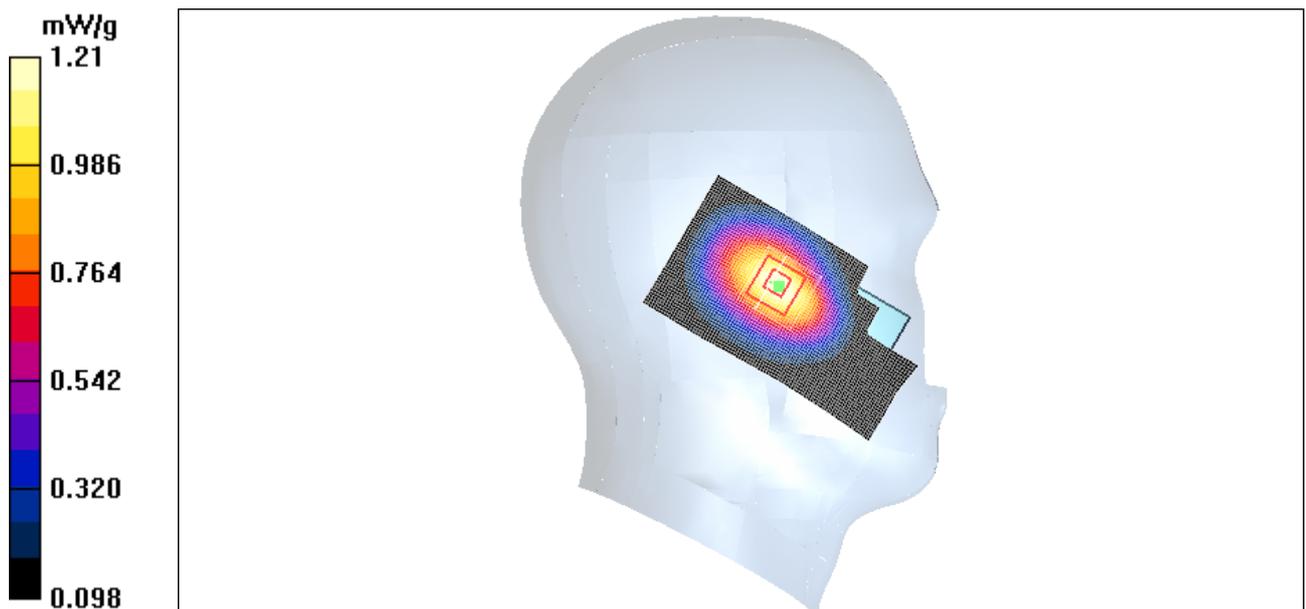


Figure 10 Left Hand Touch Cheek GSM 850 Channel 192

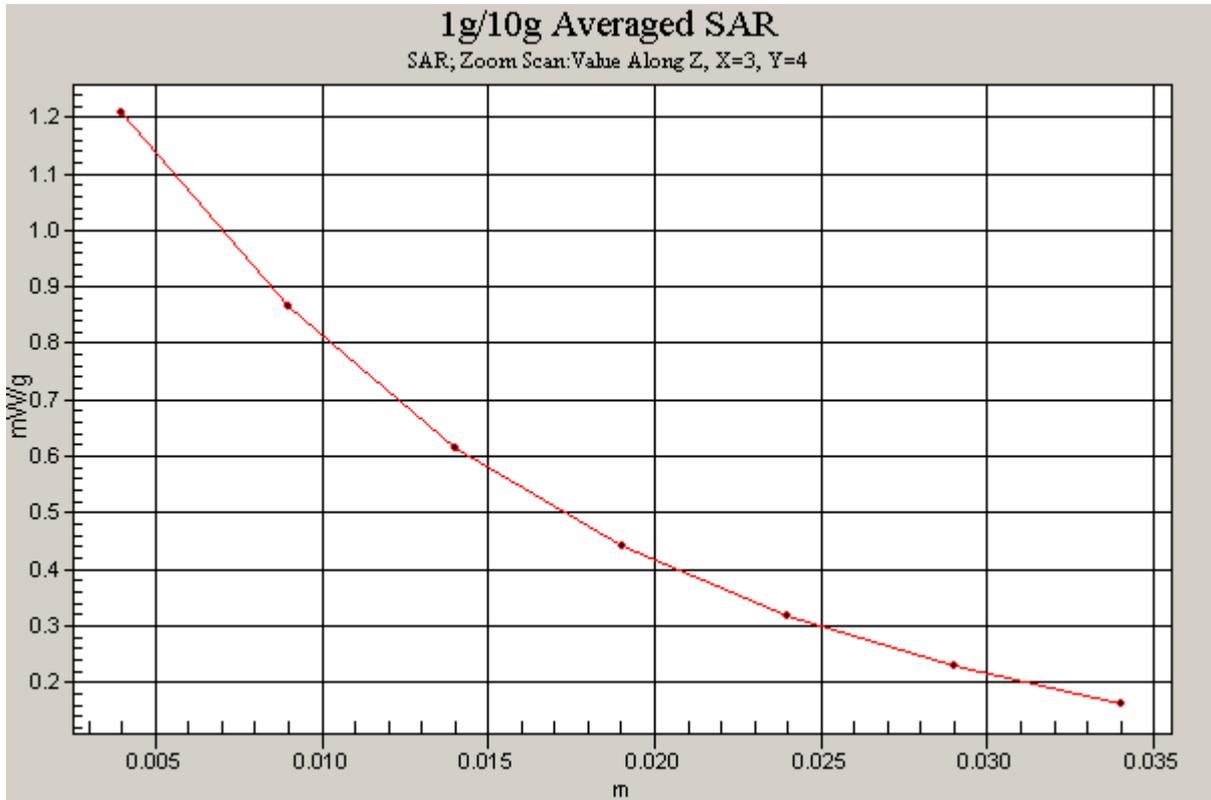


Figure 11 Z-Scan at power reference point (Left Hand Touch Cheek GSM 850 Channel 192)

GSM 850 Left Cheek Low

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.85, 6.85, 6.85);

Electronics: DAE4 Sn679;

Cheek Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.10 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.1 V/m; Power Drift = -0.109 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.681 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

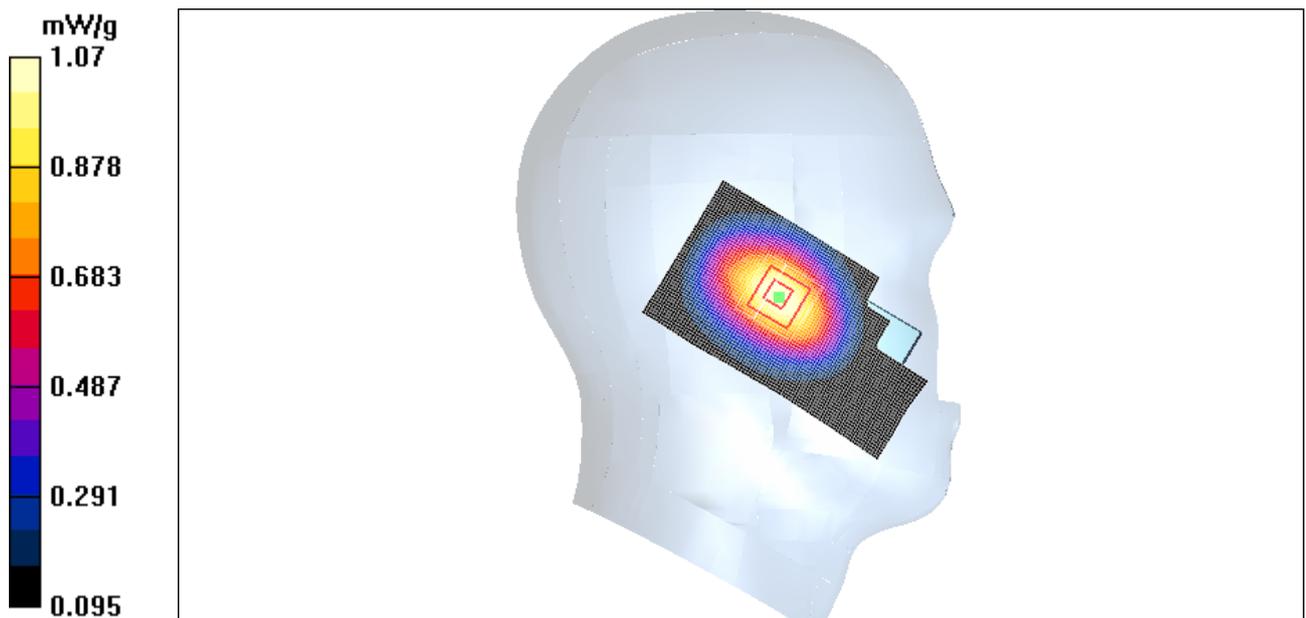


Figure 12 Left Hand Touch Cheek GSM 850 Channel 128

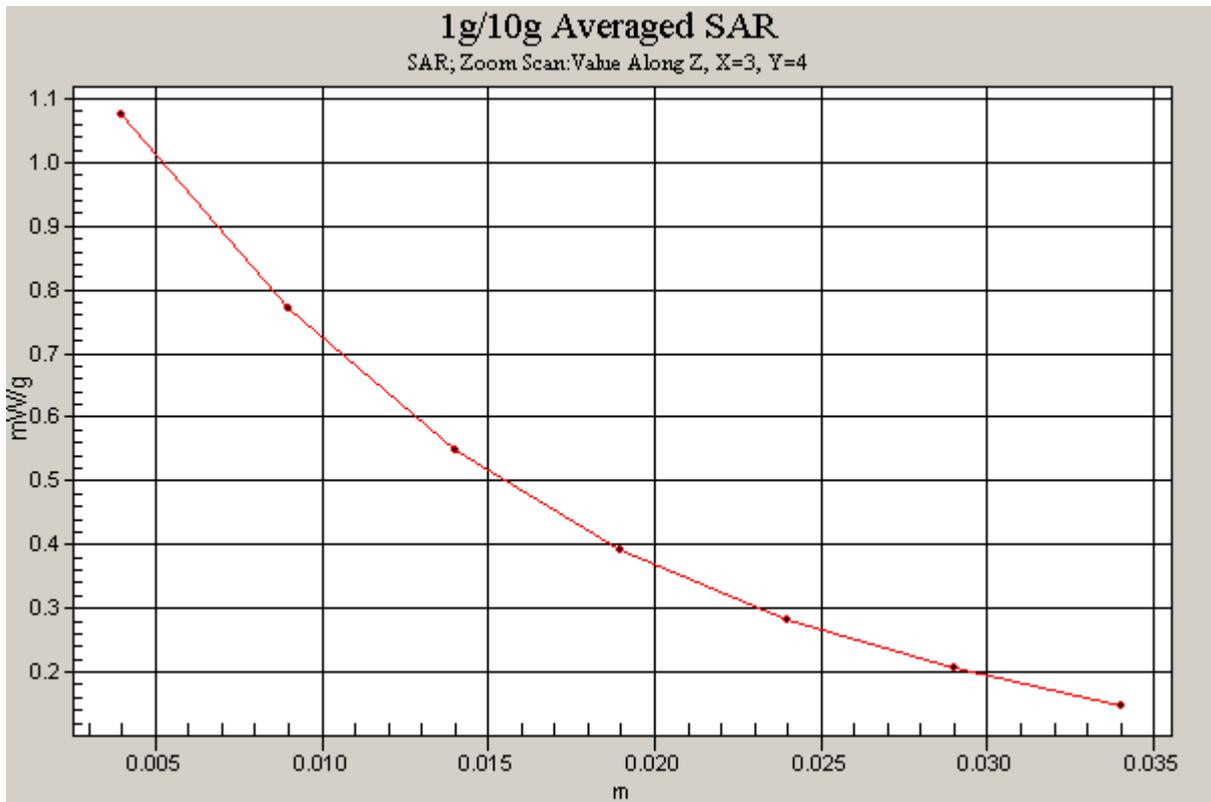


Figure 13 Z-Scan at power reference point (Left Hand Touch Cheek GSM 850 Channel 128)

GSM 850 Left Tilt High

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 849$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.85, 6.85, 6.85);

Electronics: DAE4 Sn679;

Tilt High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.563 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.1 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.720 W/kg

SAR(1 g) = 0.527 mW/g; SAR(10 g) = 0.361 mW/g

Maximum value of SAR (measured) = 0.565 mW/g

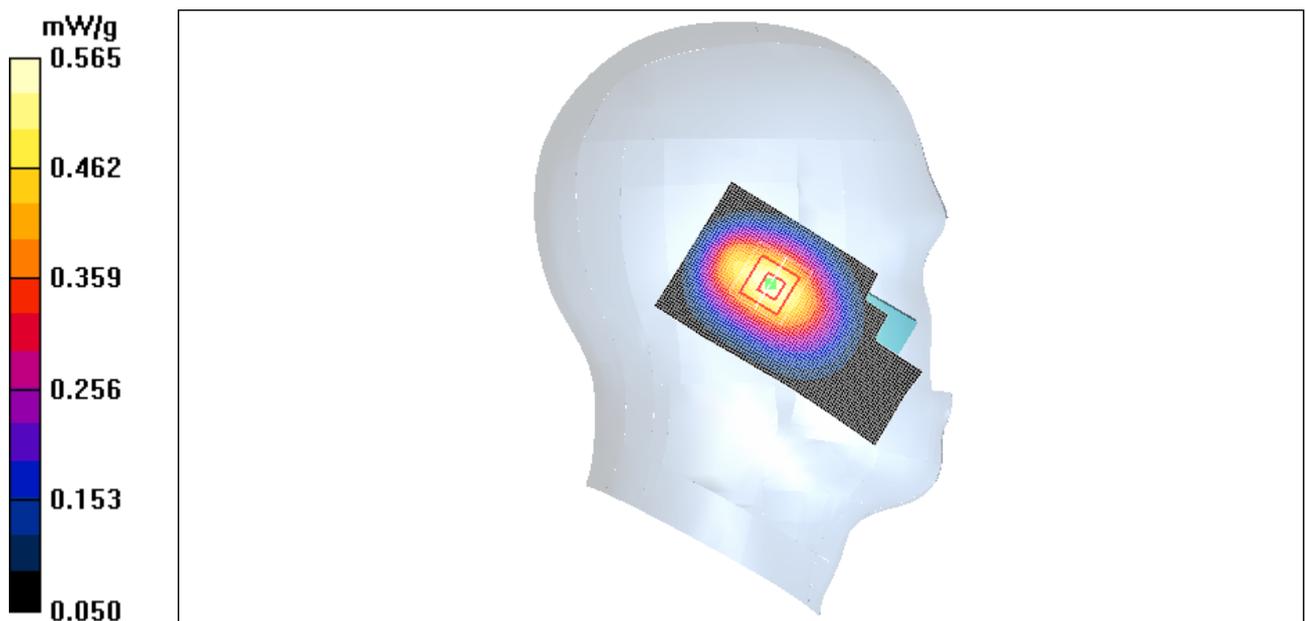


Figure 14 Left Hand Tilt 15° GSM 850 Channel 251

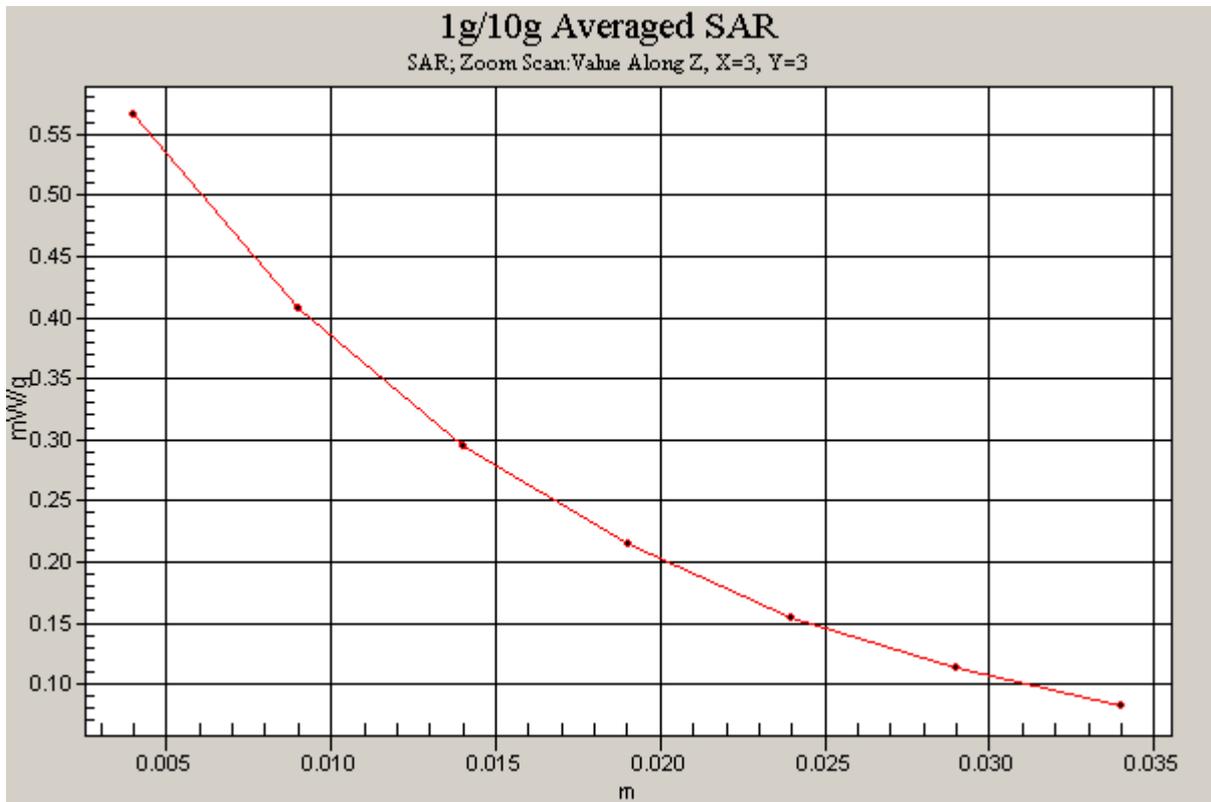


Figure 15 Z-Scan at power reference point (Left Hand Tilt 15° GSM 850 Channel 251)

GSM 850 Left Tilt Middle

Communication System: GSM 850; Frequency: 837 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.934$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.85, 6.85, 6.85);

Electronics: DAE4 Sn679;

Tilt Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.621 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.7 V/m; Power Drift = -0.088 dB

Peak SAR (extrapolated) = 0.786 W/kg

SAR(1 g) = 0.582 mW/g; SAR(10 g) = 0.401 mW/g

Maximum value of SAR (measured) = 0.623 mW/g

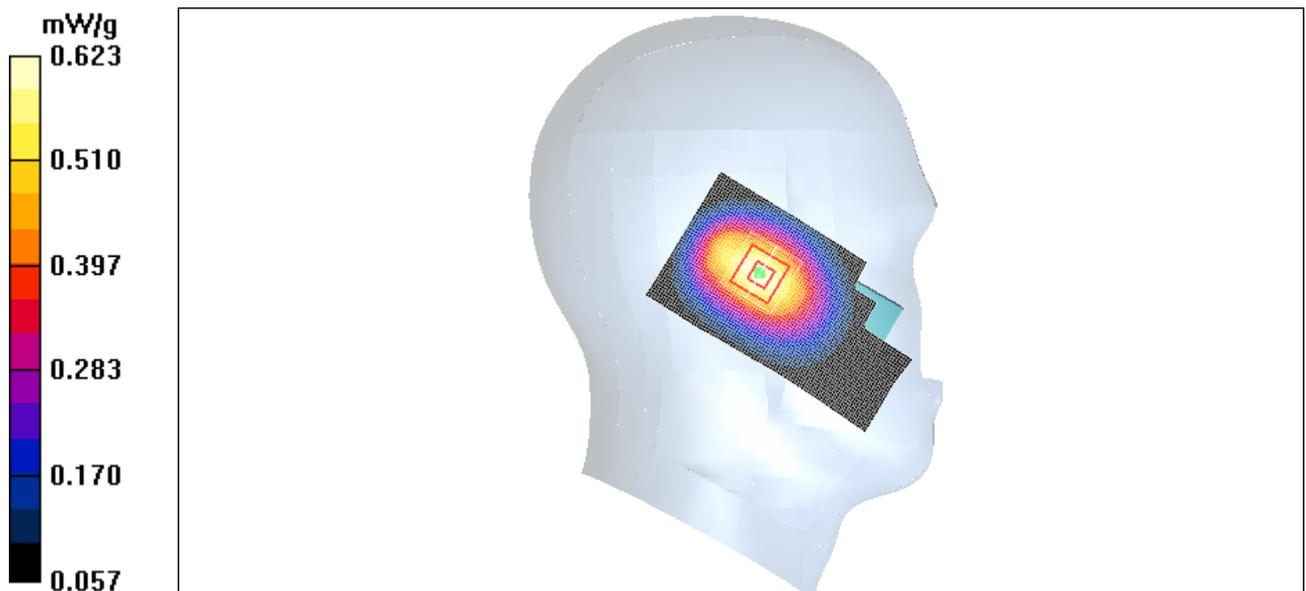


Figure 16 Left Hand Tilt 15 ° GSM 850 Channel 192

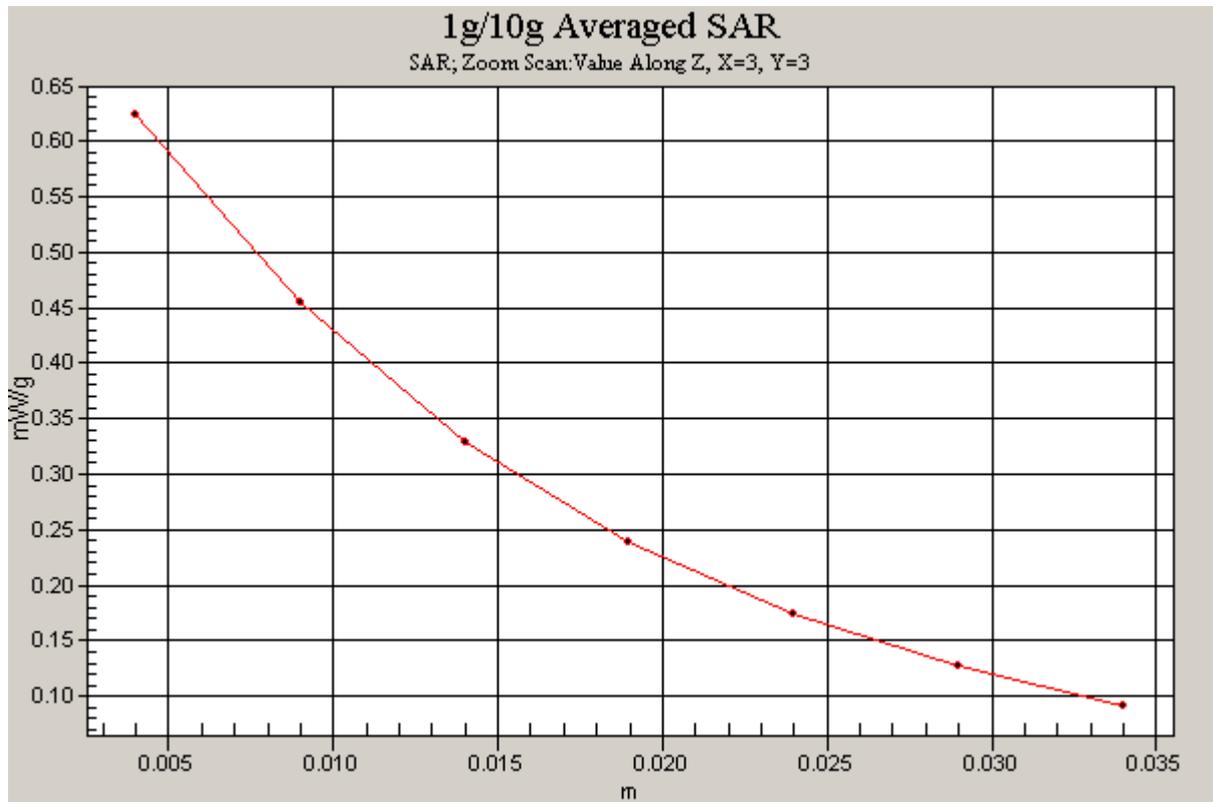


Figure 17 Z-Scan at power reference point (Left Hand Tilt 15 ° GSM 850 Channel 192)

GSM 850 Left Tilt Low

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.85, 6.85, 6.85);

Electronics: DAE4 Sn679;

Tilt Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.584 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.2 V/m; Power Drift = -0.122 dB

Peak SAR (extrapolated) = 0.725 W/kg

SAR(1 g) = 0.538 mW/g; SAR(10 g) = 0.372 mW/g

Maximum value of SAR (measured) = 0.571 mW/g

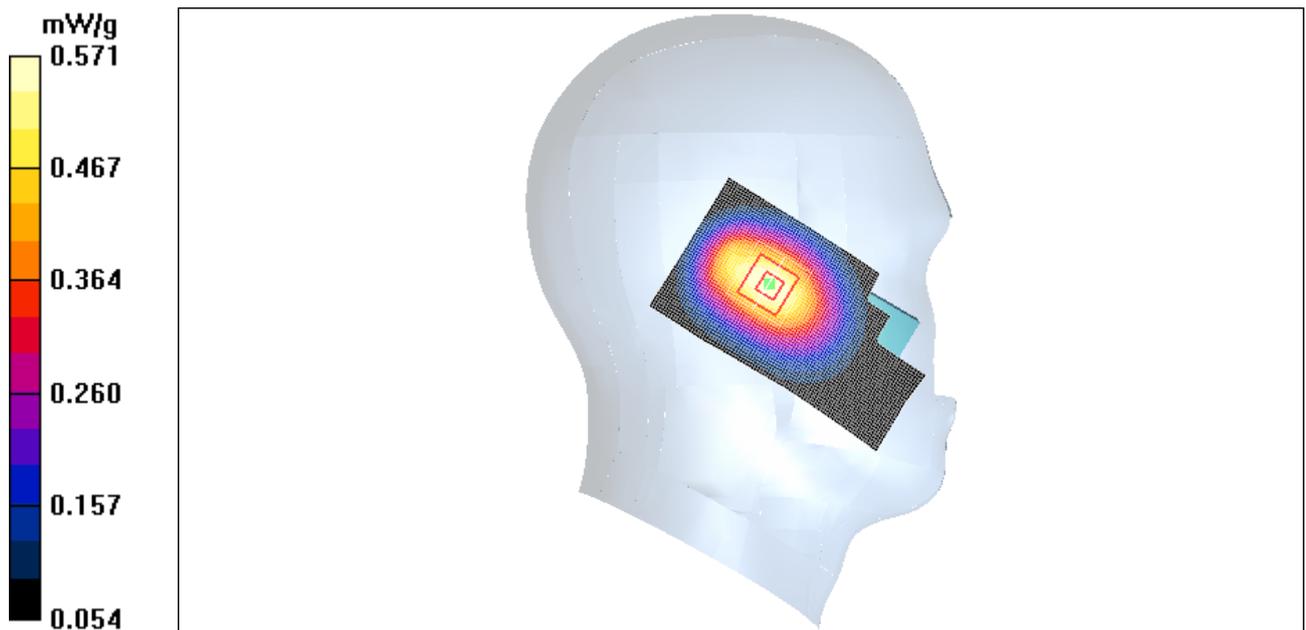


Figure 18 Left Hand Tilt 15 ° GSM 850 Channel 128

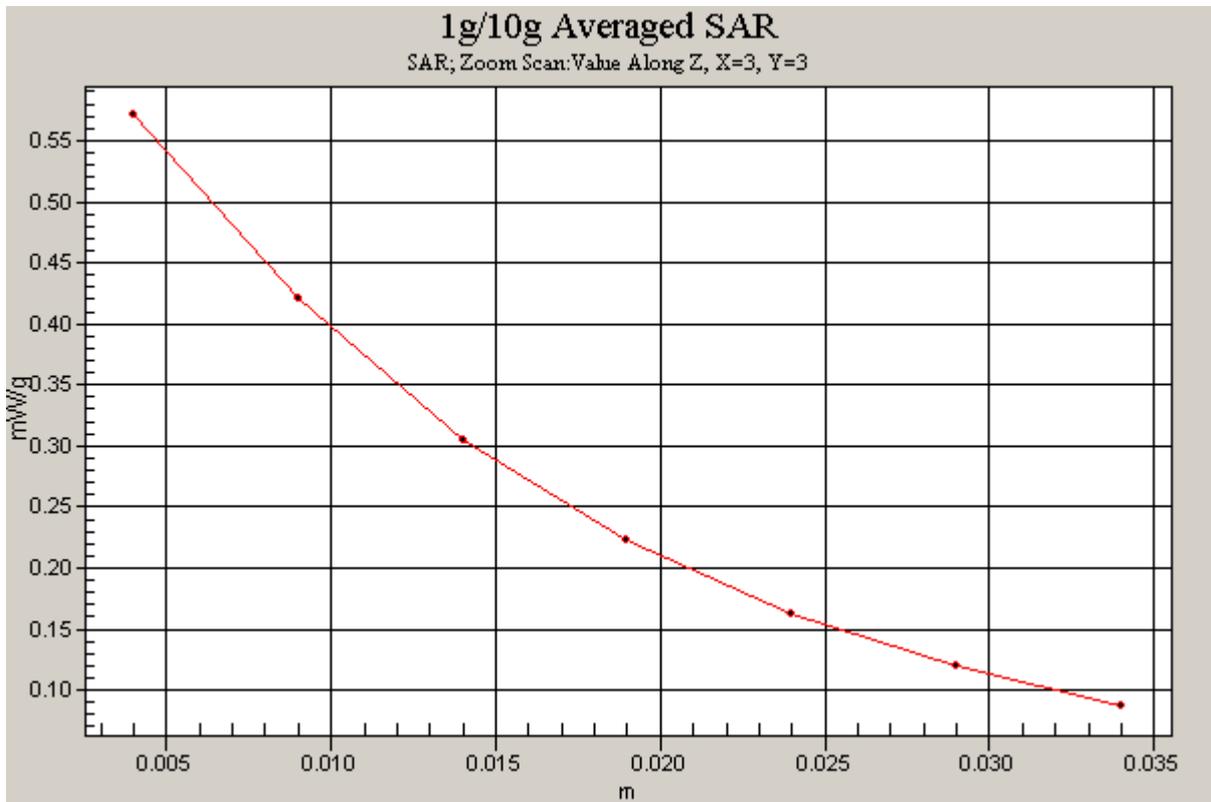


Figure 19 Z-Scan at power reference point (Left Hand Tilt 15 ° GSM 850 Channel 128)

GSM 850 Right Cheek High

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 849$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.85, 6.85, 6.85);

Electronics: DAE4 Sn679;

Cheek High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.01 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.4 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.933 mW/g; SAR(10 g) = 0.626 mW/g

Maximum value of SAR (measured) = 0.999 mW/g

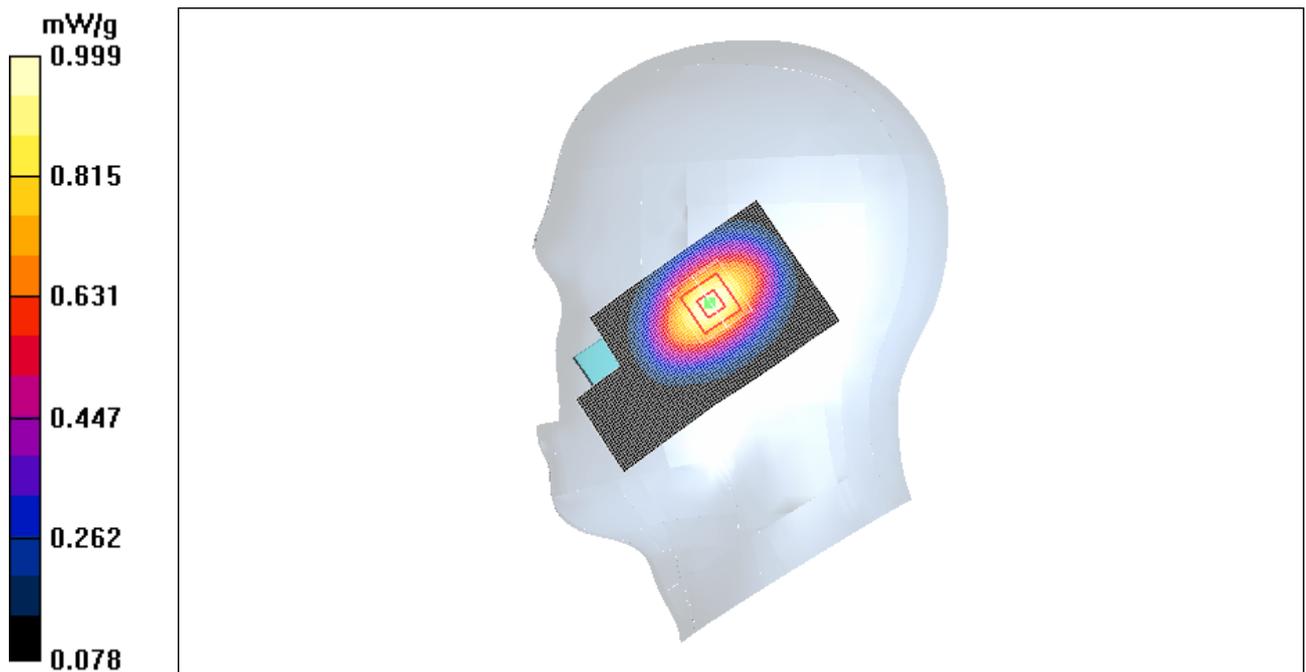


Figure 20 Right Hand Touch Cheek GSM 850 Channel 251

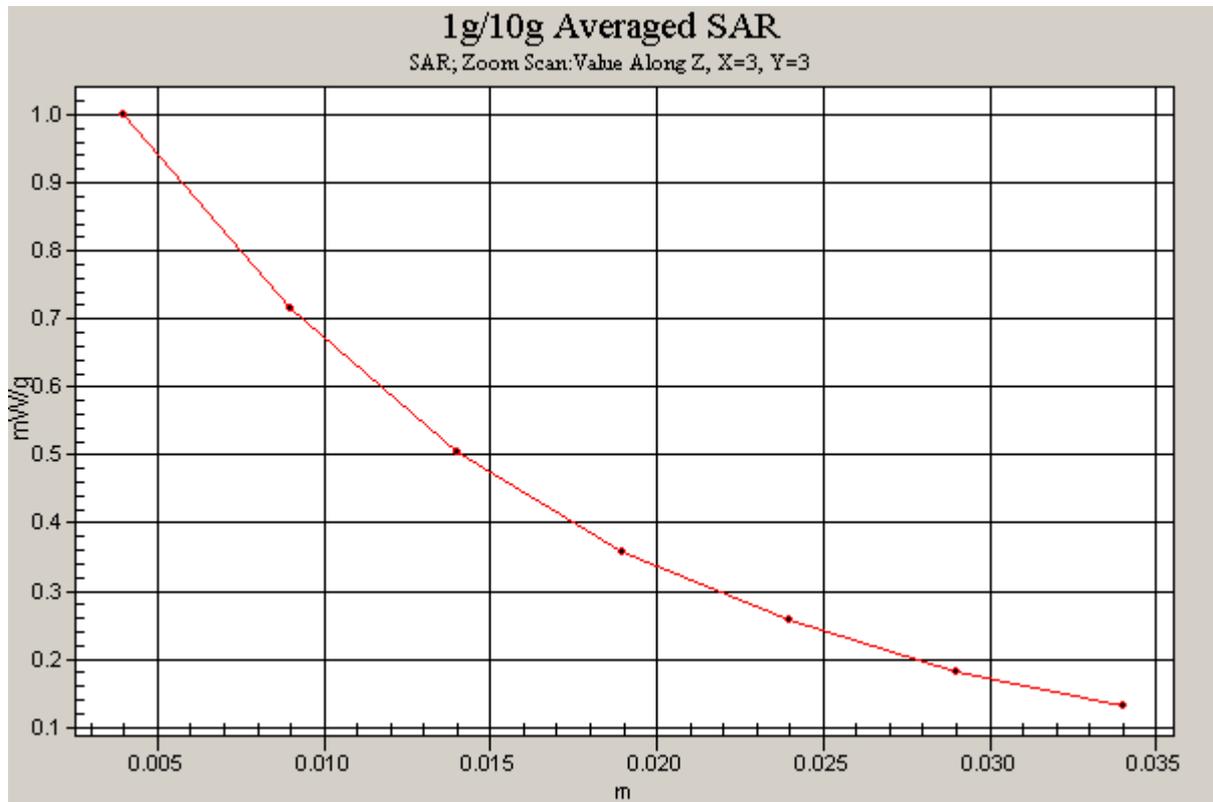


Figure 21 Z-Scan at power reference point (Right Hand Touch Cheek GSM 850 Channel 251)

GSM 850 Right Cheek Middle

Communication System: GSM 850; Frequency: 837 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.934$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.85, 6.85, 6.85);

Electronics: DAE4 Sn679;

Cheek Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.12 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.1 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.693 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

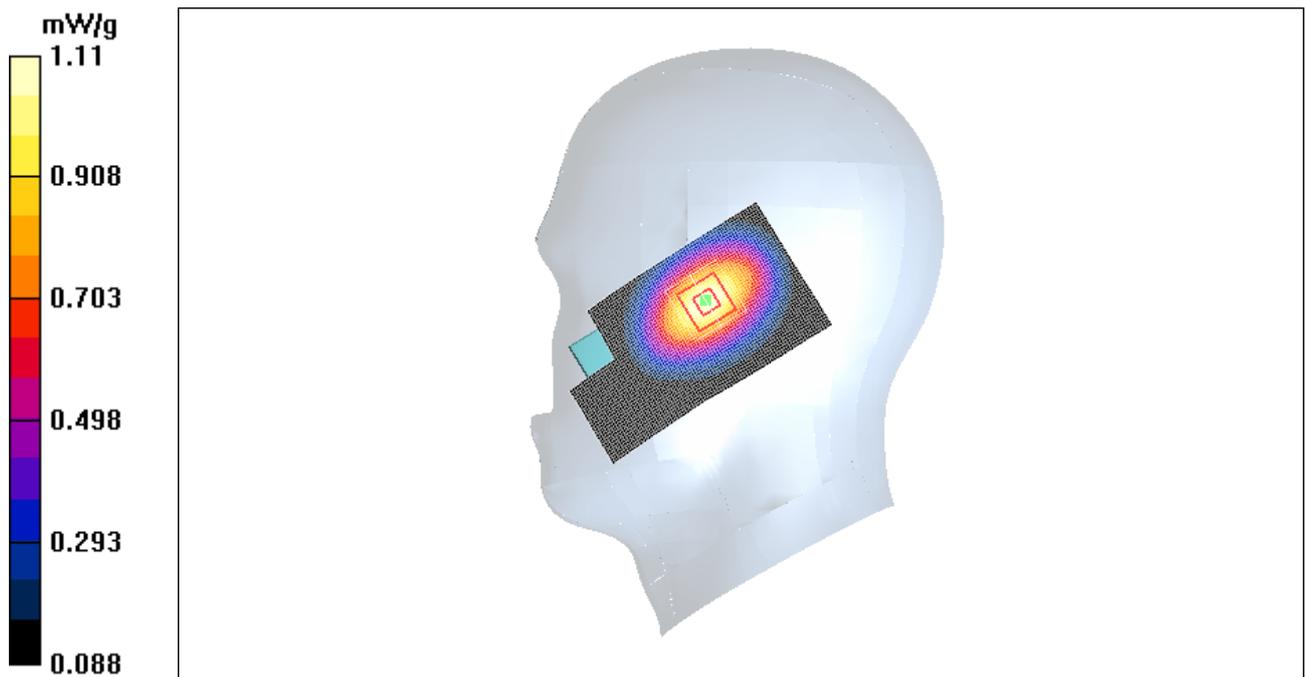


Figure 22 Right Hand Touch Cheek GSM 850 Channel 192

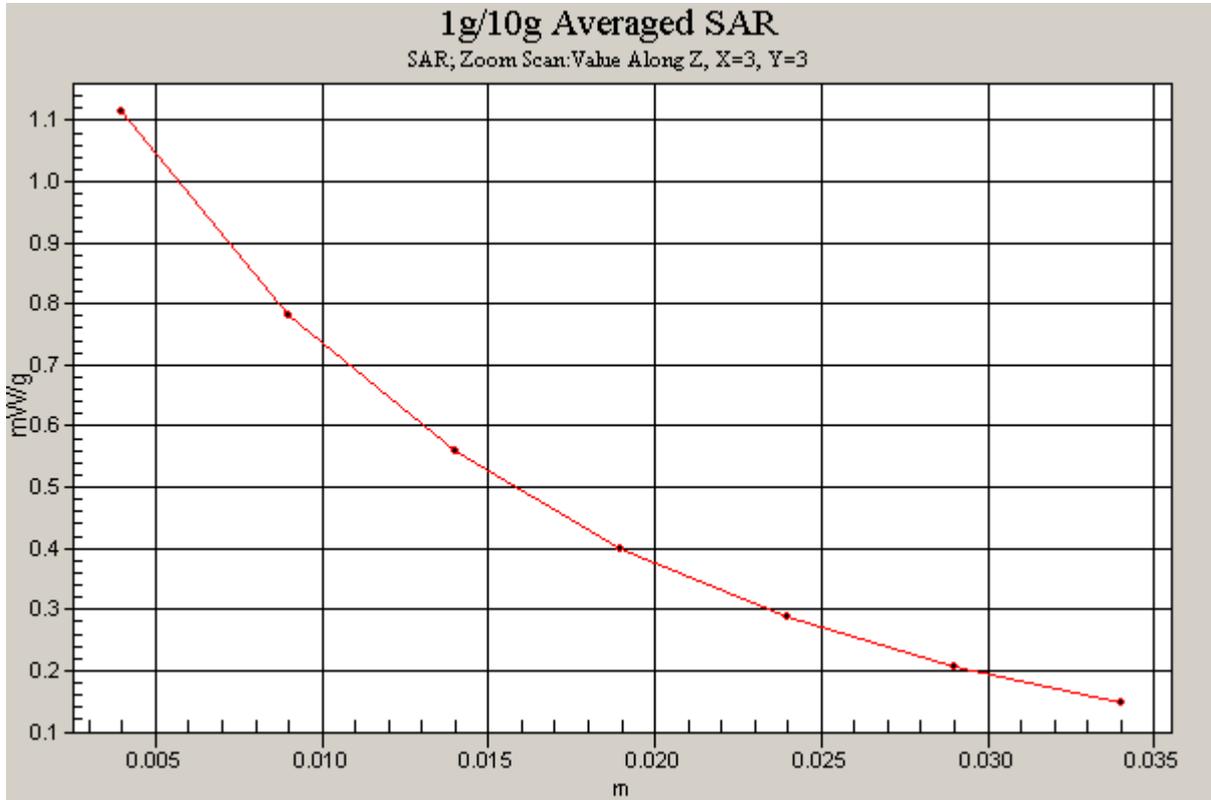


Figure 23 Z-Scan at power reference point (Right Hand Touch Cheek GSM 850 Channel 192)

GSM 850 Right Cheek Low

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.85, 6.85, 6.85);

Electronics: DAE4 Sn679;

Cheek Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.983 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.7 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.900 mW/g; SAR(10 g) = 0.606 mW/g

Maximum value of SAR (measured) = 0.960 mW/g

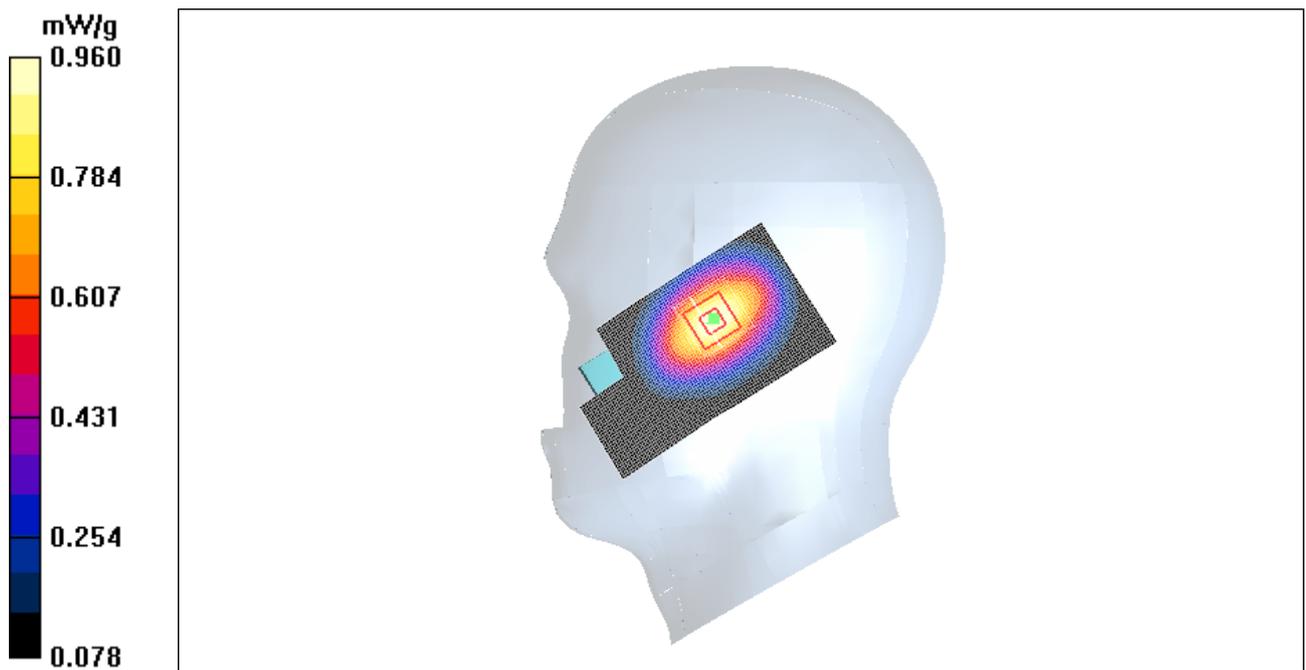


Figure 24 Right Hand Touch Cheek GSM 850 Channel 128

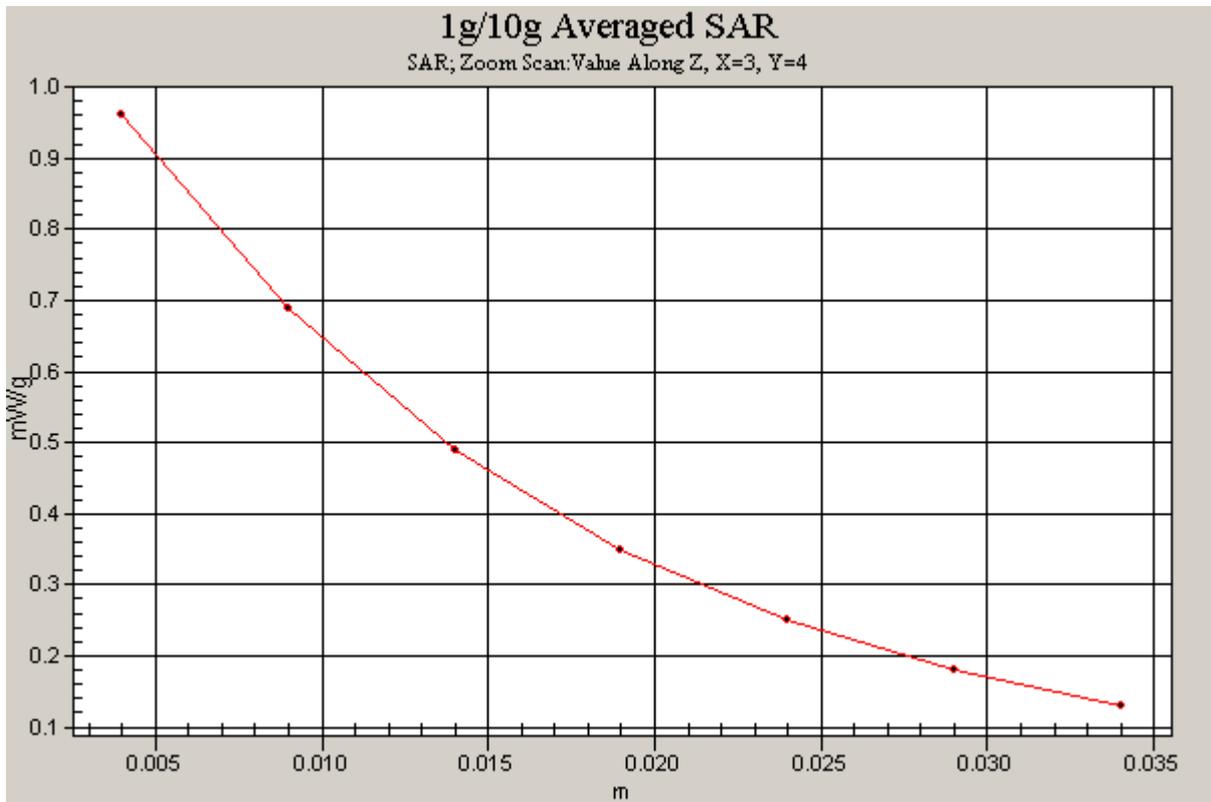


Figure 25 Z-Scan at power reference point (Right Hand Touch Cheek GSM 850 Channel 128)

GSM 850 Right Tilt High

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 849$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.85, 6.85, 6.85);

Electronics: DAE4 Sn679;

Tilt High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.541 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.8 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 0.693 W/kg

SAR(1 g) = 0.508 mW/g; SAR(10 g) = 0.347 mW/g

Maximum value of SAR (measured) = 0.546 mW/g

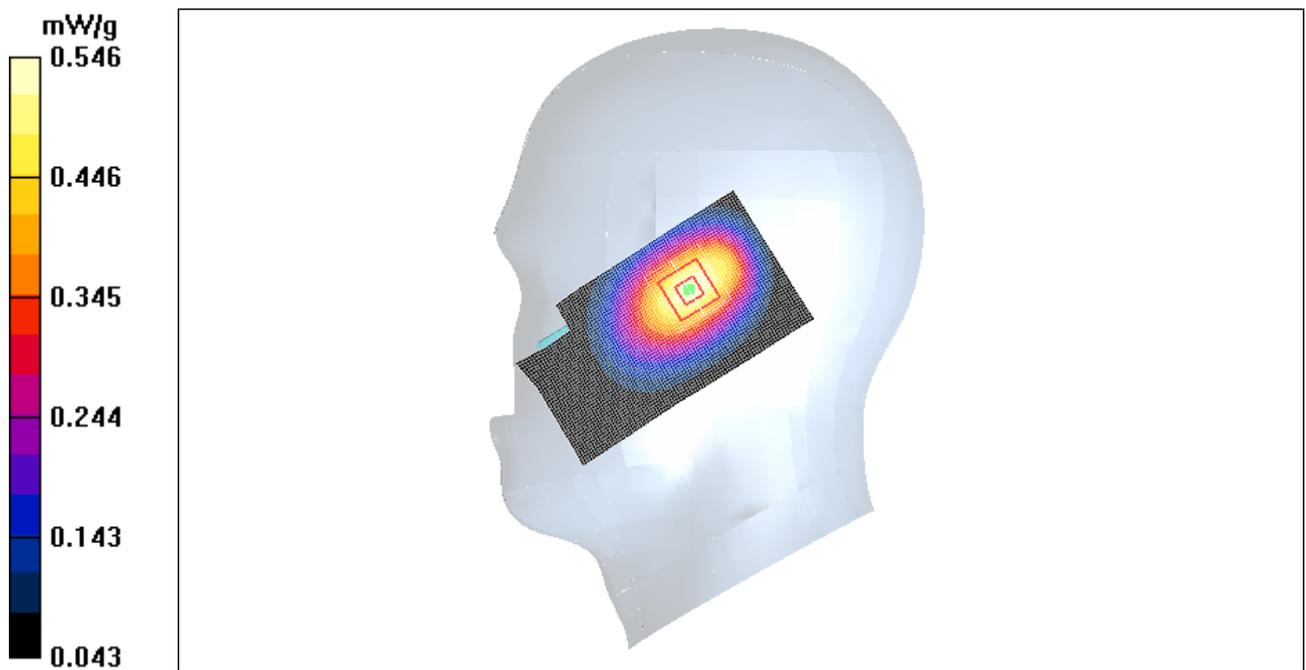


Figure 26 Right Hand Tilt 15 ° GSM 850 Channel 251

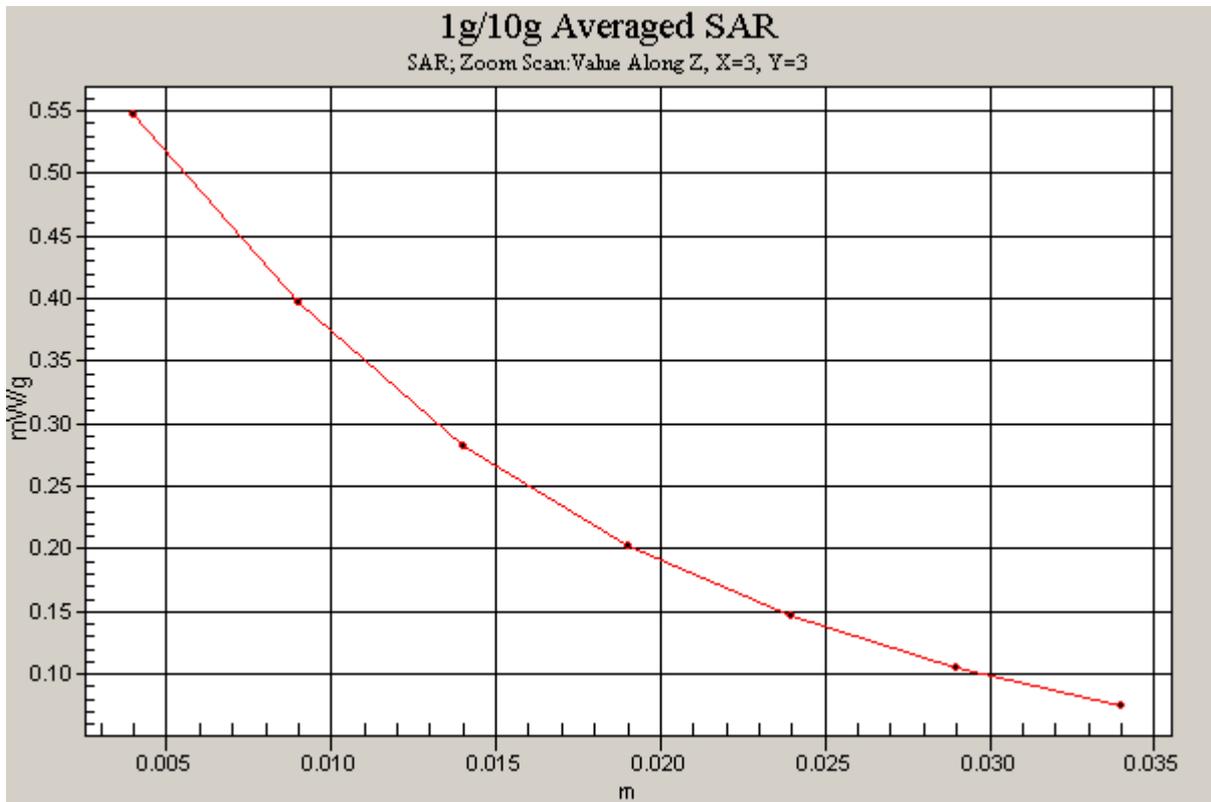


Figure 27 Z-Scan at power reference point (Right Hand Tilt 15 ° GSM 850 Channel 251)

GSM 850 Right Tilt Middle

Communication System: GSM 850; Frequency: 837 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.934$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.85, 6.85, 6.85);

Electronics: DAE4 Sn679;

Tilt Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.601 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.1 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.769 W/kg

SAR(1 g) = 0.559 mW/g; SAR(10 g) = 0.382 mW/g

Maximum value of SAR (measured) = 0.603 mW/g

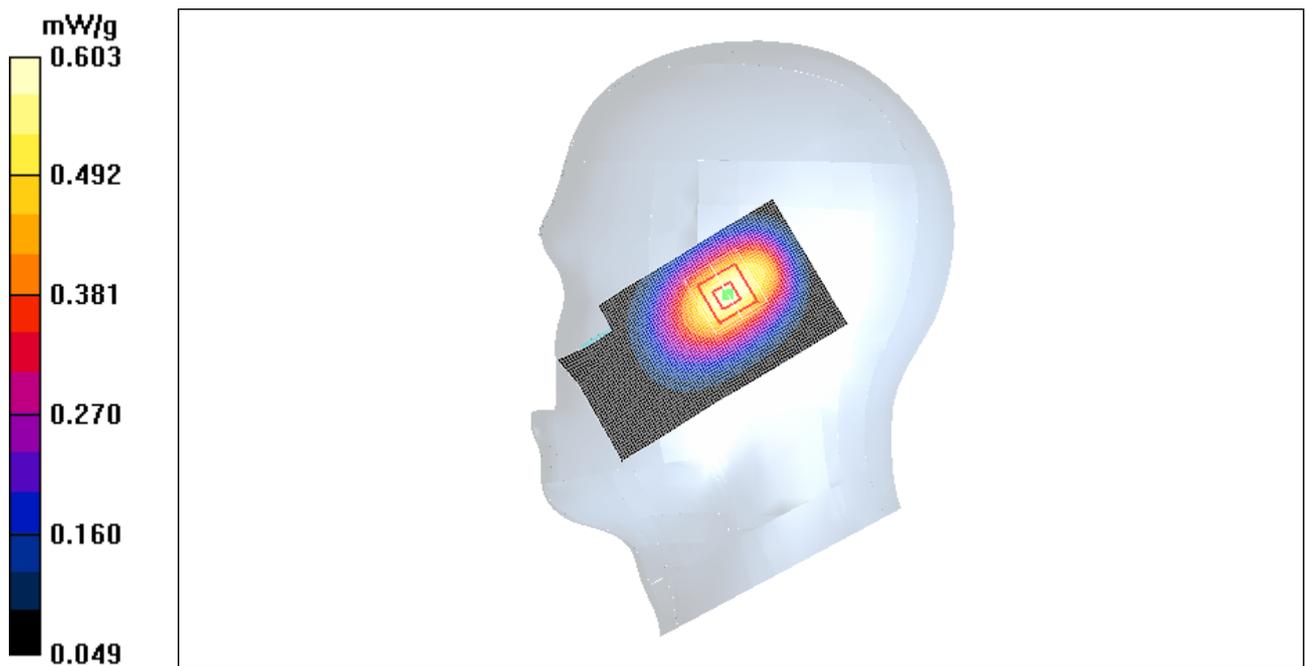


Figure 28 Right Hand Tilt 15 ° GSM 850 Channel 192

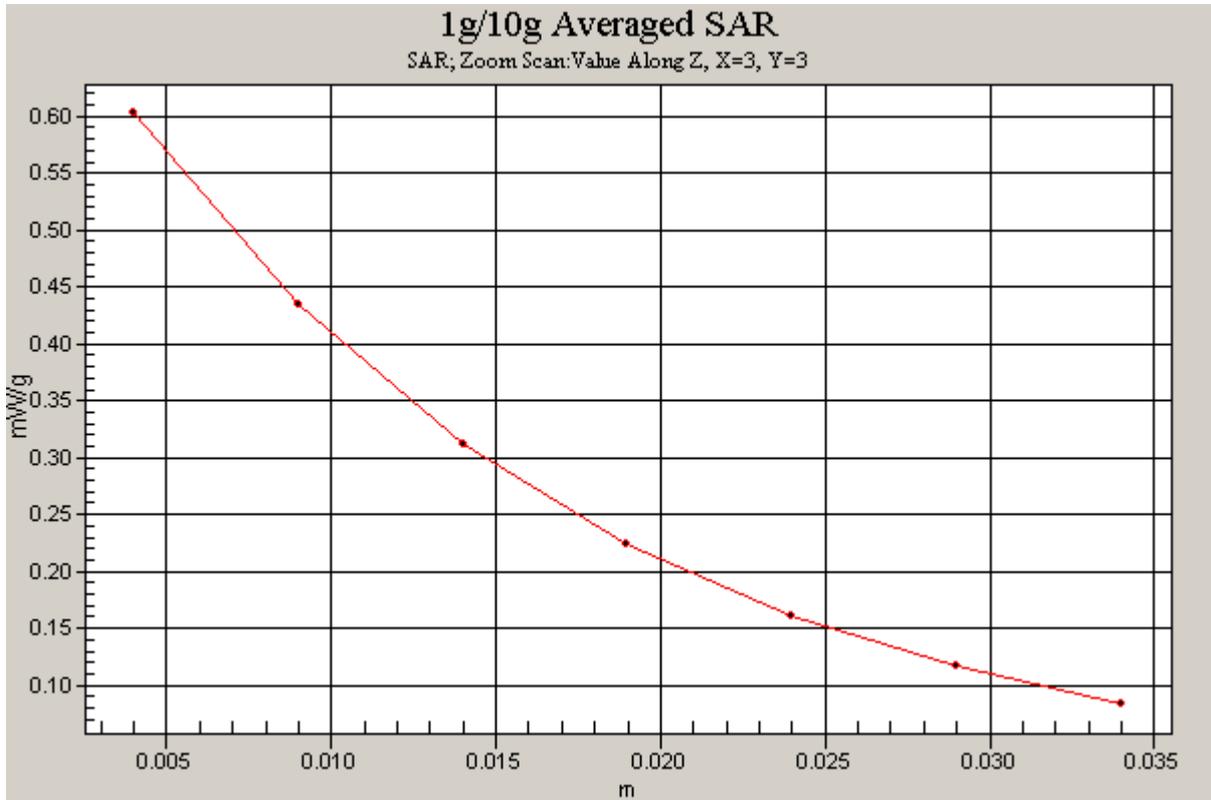


Figure 29 Z-Scan at power reference point (Right Hand Tilt 15 ° GSM 850 Channel 192)

GSM 850 Right Tilt Low

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.85, 6.85, 6.85);

Electronics: DAE4 Sn679;

Tilt Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.550 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.2 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 0.685 W/kg

SAR(1 g) = 0.505 mW/g; SAR(10 g) = 0.347 mW/g

Maximum value of SAR (measured) = 0.544 mW/g

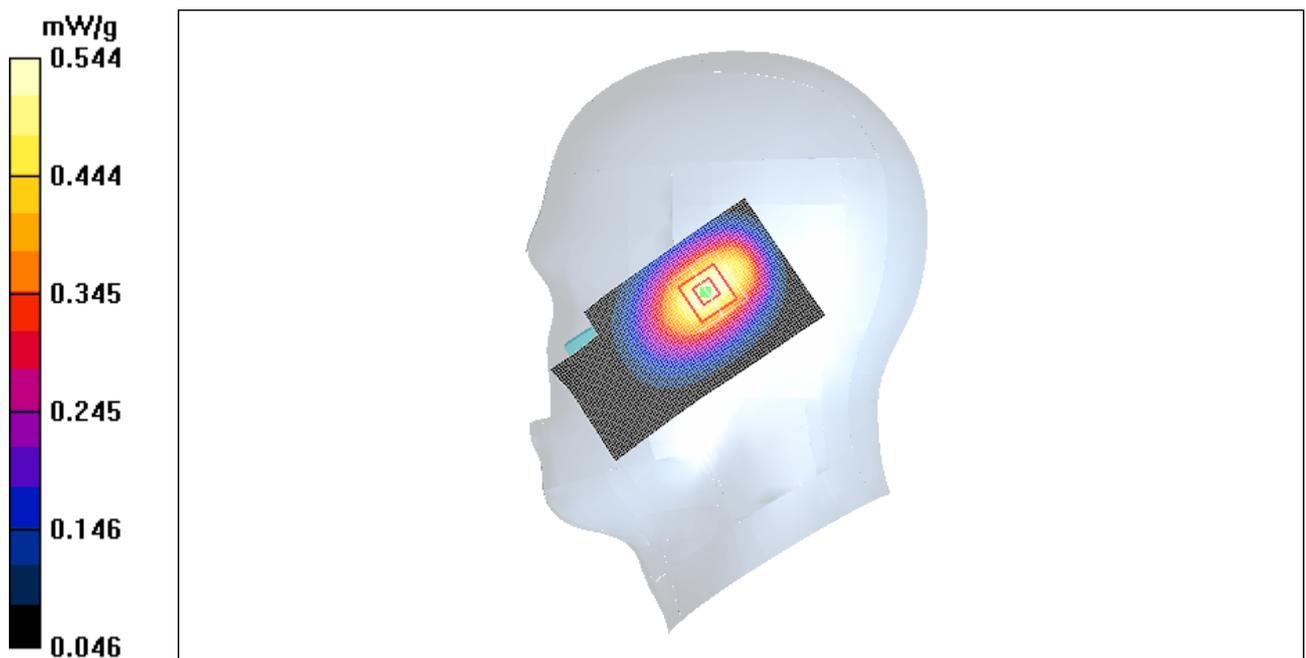


Figure 30 Right Hand Tilt 15 ° GSM 850 Channel 128

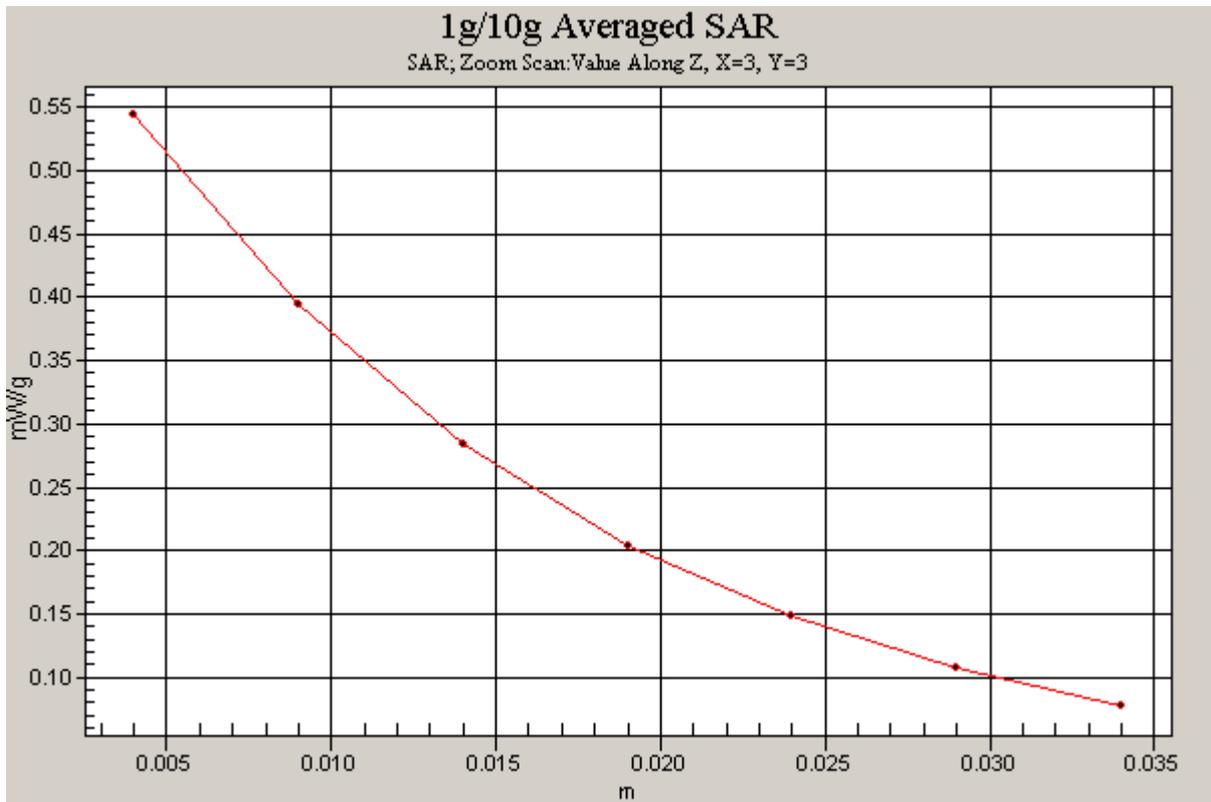


Figure 31 Z-Scan at power reference point (Right Hand Tilt 15 ° GSM 850 Channel 128)

GSM 850 Towards Ground High

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 849$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.52, 6.52, 6.52);

Electronics: DAE4 Sn679;

Towards ground, High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.421 mW/g

Towards ground, High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.502 W/kg

SAR(1 g) = 0.393 mW/g; SAR(10 g) = 0.284 mW/g

Maximum value of SAR (measured) = 0.417 mW/g

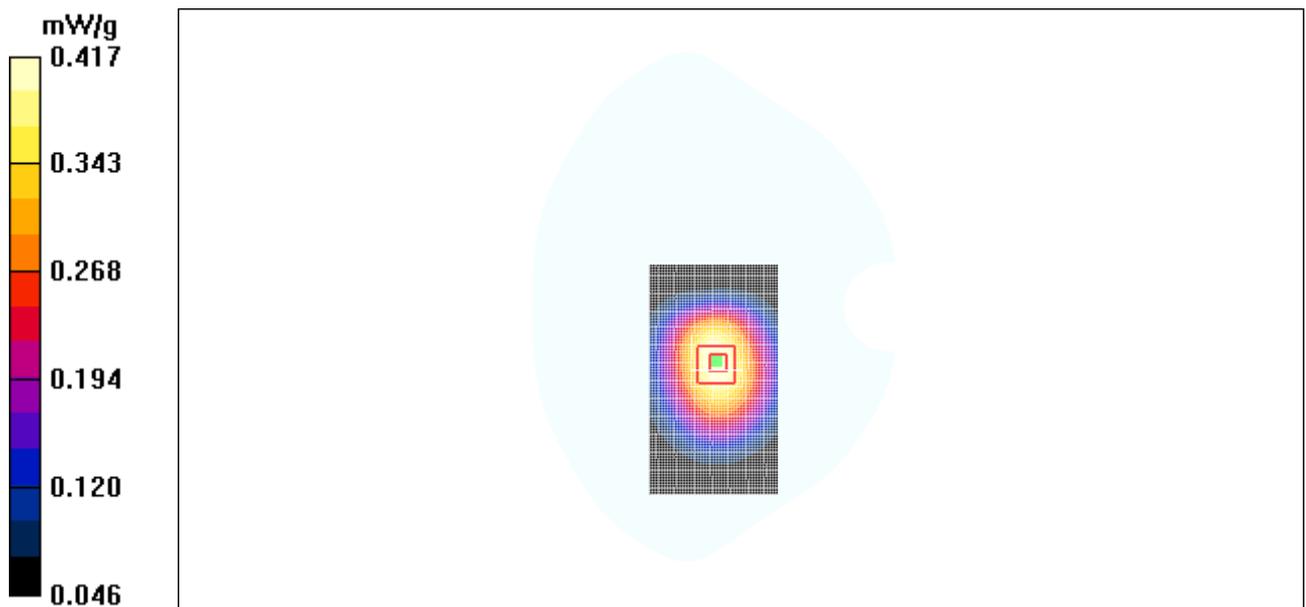


Figure 32 Body, Towards Ground, GSM 850 Channel 251

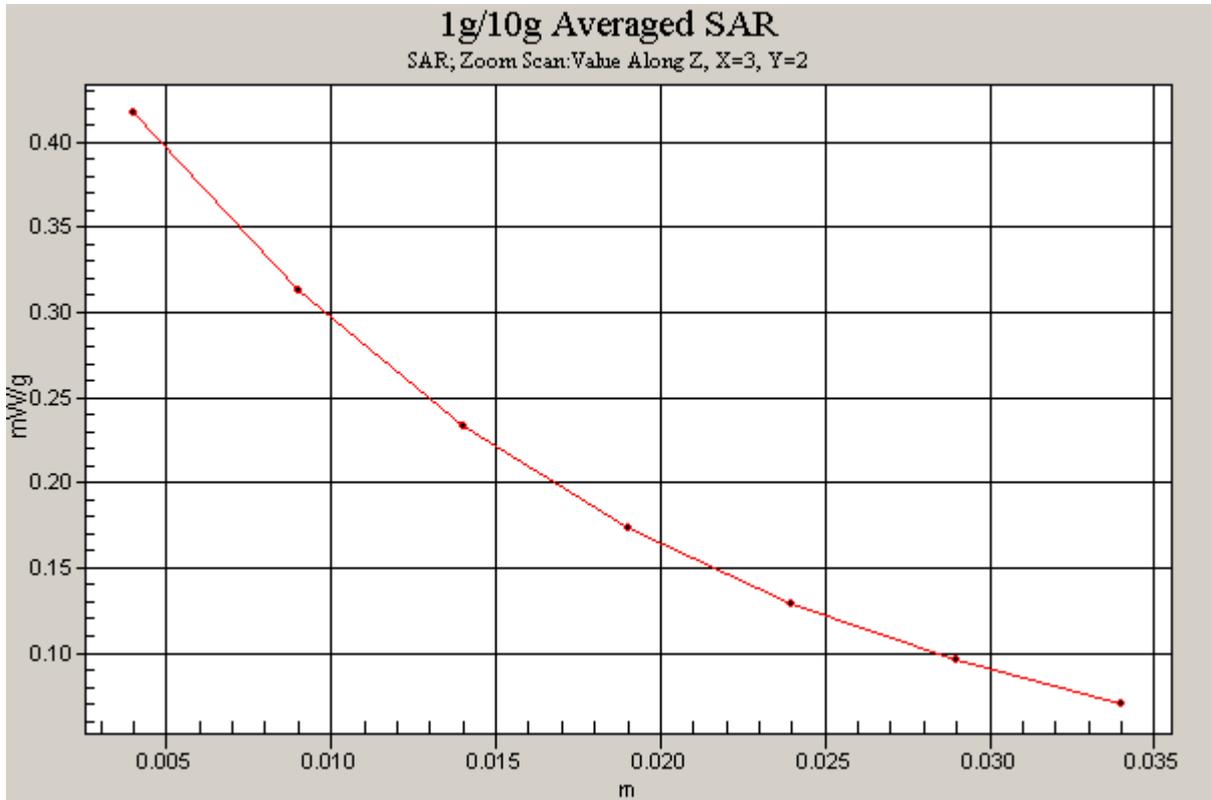


Figure 33 Z-Scan at power reference point (Body, Towards Ground, GSM 850 Channel 251)

GSM 850 Towards Ground Middle

Communication System: GSM 850; Frequency: 837 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.52, 6.52, 6.52);

Electronics: DAE4 Sn679;

Towards ground, Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.492 mW/g

Towards ground, Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.0 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.582 W/kg

SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.333 mW/g

Maximum value of SAR (measured) = 0.489 mW/g

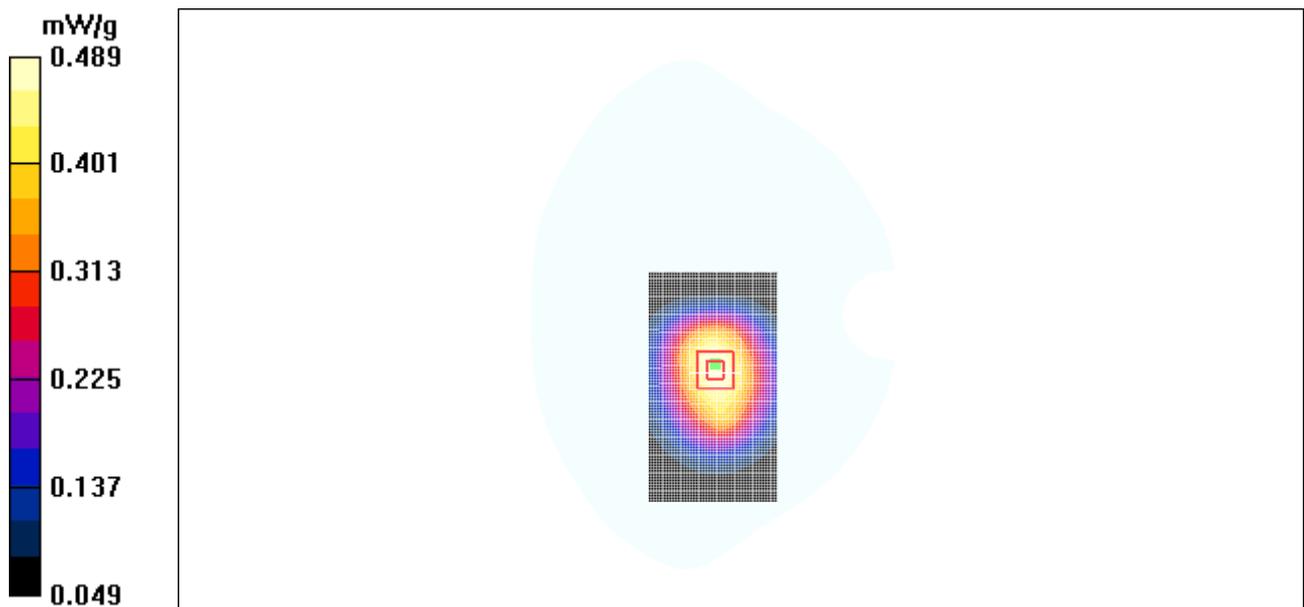


Figure 34 Body, Towards Ground, GSM 850 Channel 192

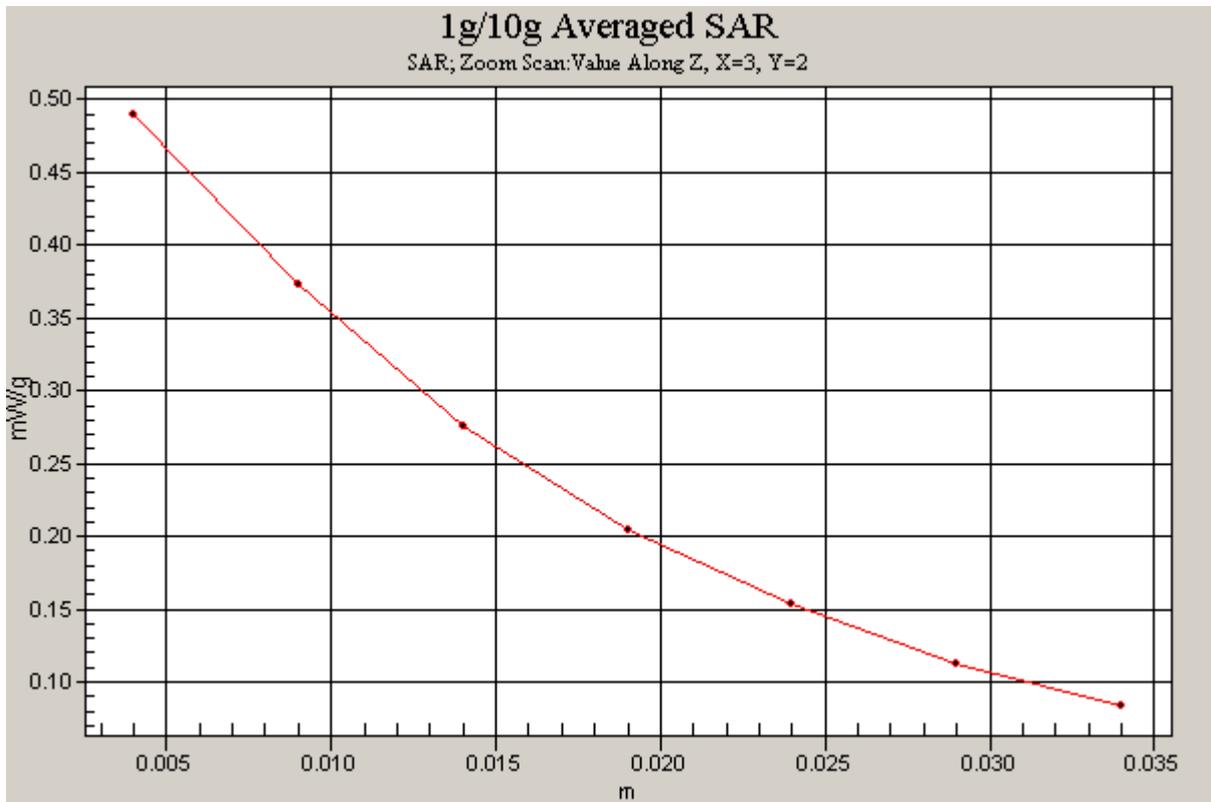


Figure 35 Z-Scan at power reference point (Body, Towards Ground, GSM 850 Channel 192)

GSM 850 Towards Ground Low

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 55.6$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.52, 6.52, 6.52);

Electronics: DAE4 Sn679;

Towards ground,Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.558 mW/g

Towards ground,Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.3 V/m; Power Drift = -0.130 dB

Peak SAR (extrapolated) = 0.658 W/kg

SAR(1 g) = 0.519 mW/g; SAR(10 g) = 0.377 mW/g

Maximum value of SAR (measured) = 0.549 mW/g

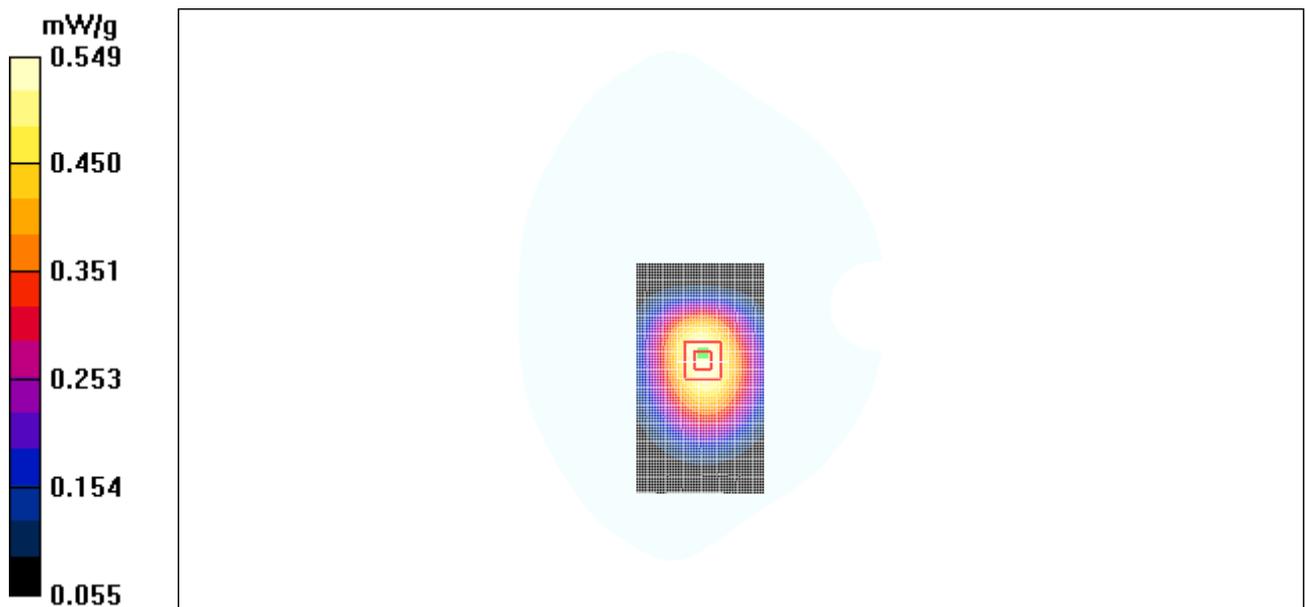


Figure 36 Body, Towards Ground, GSM 850 Channel 128

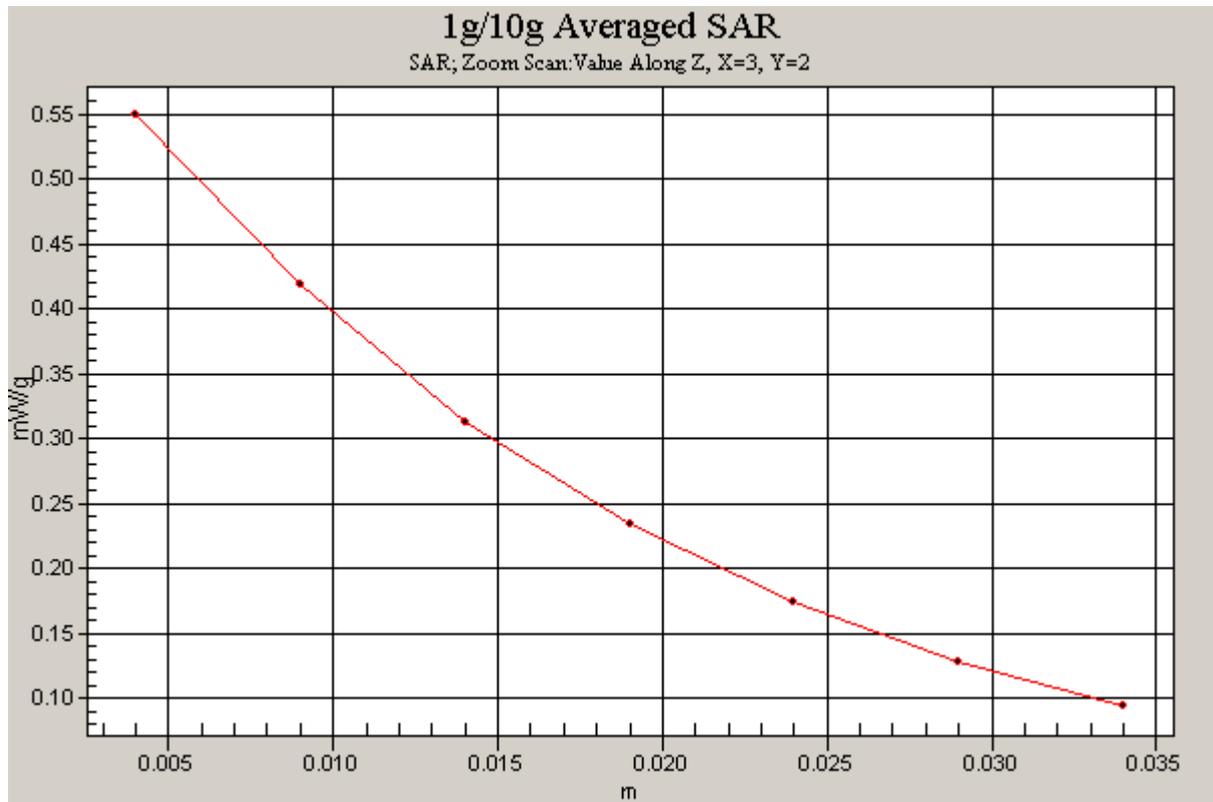


Figure 37 Z-Scan at power reference point (Body, Towards Ground, GSM 850 Channel 128)

GSM 850 Towards Phantom High

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 849$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.52, 6.52, 6.52);

Electronics: DAE4 Sn679;

Towards phantom, High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.253 mW/g

Towards phantom, High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.169 mW/g

Maximum value of SAR (measured) = 0.253 mW/g

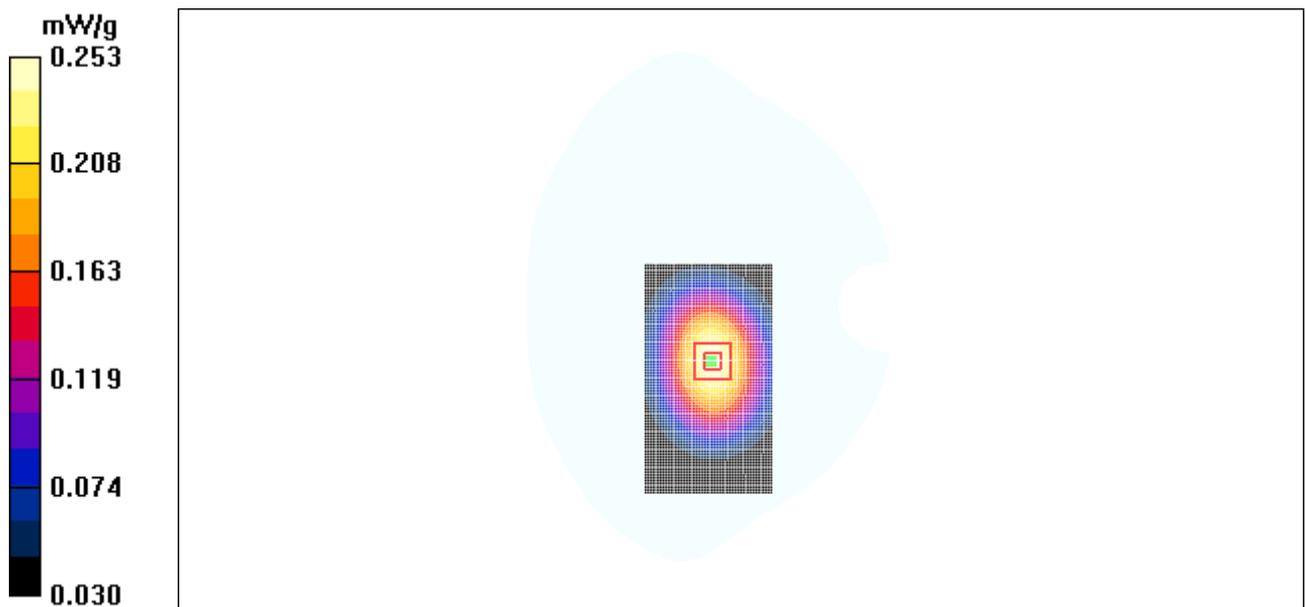


Figure 38 Body, Towards Phantom, GSM 850 Channel 251

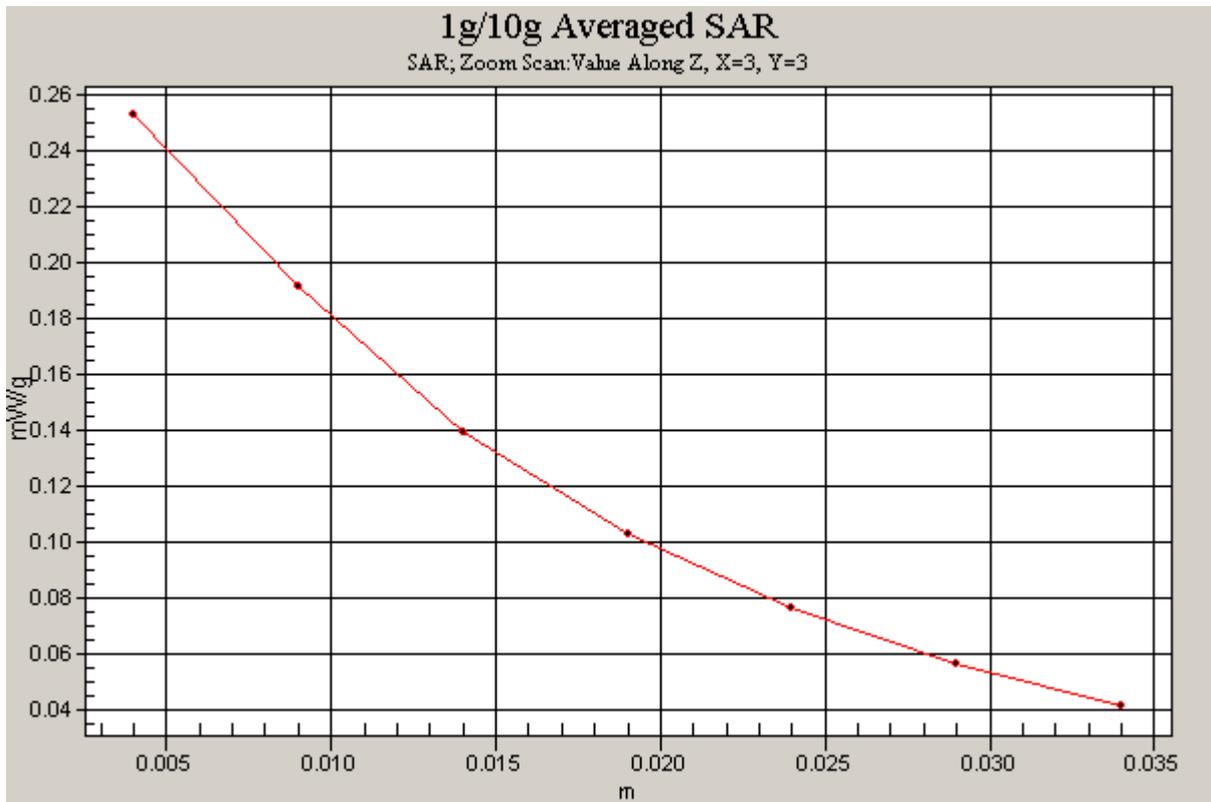


Figure 39 Z-Scan at power reference point (Body, Towards Phantom, GSM 850 Channel 251)

GSM 850 Towards Phantom Middle

Communication System: GSM 850; Frequency: 837 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.52, 6.52, 6.52);

Electronics: DAE4 Sn679;

Towards phantom,Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.290 mW/g

Towards phantom,Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.343 W/kg

SAR(1 g) = 0.271 mW/g; SAR(10 g) = 0.195 mW/g

Maximum value of SAR (measured) = 0.288 mW/g

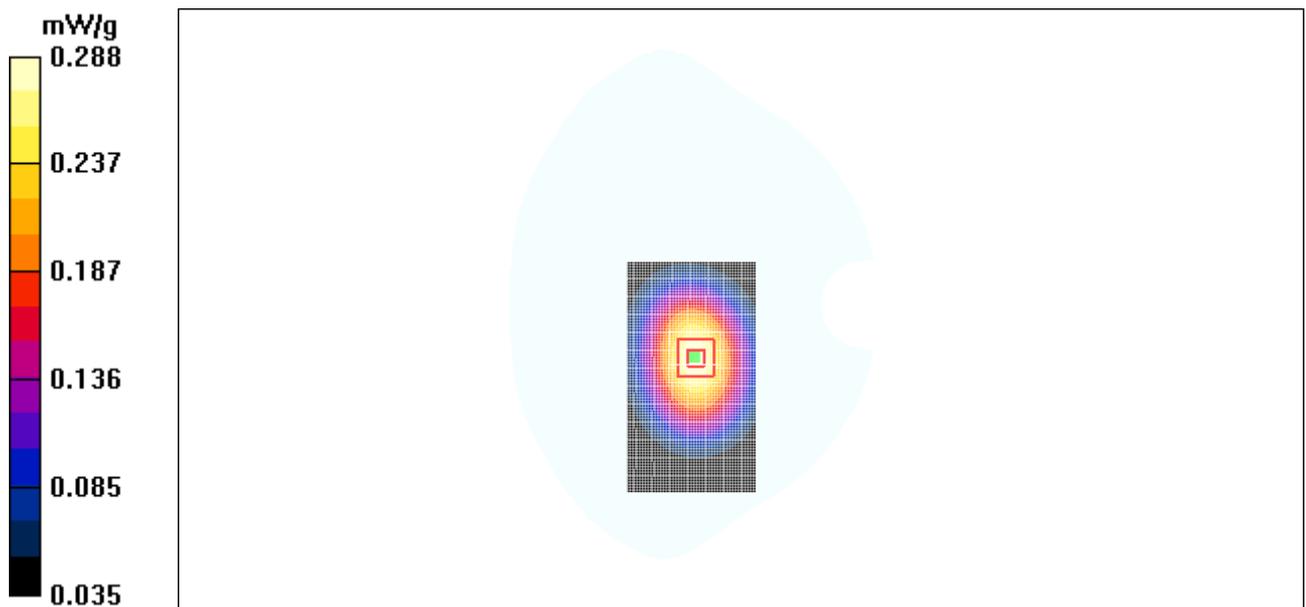


Figure 40 Body, Towards Phantom, GSM 850 Channel 192

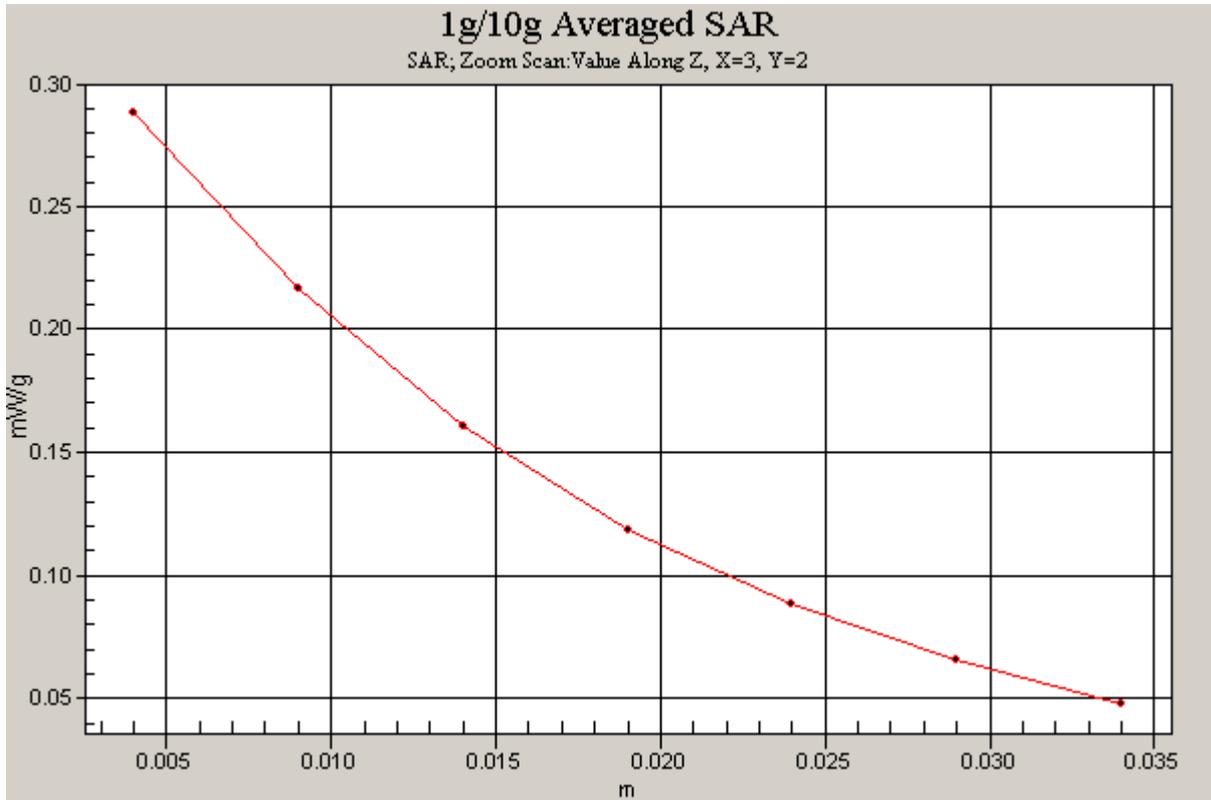


Figure 41 Z-Scan at power reference point (Body, Towards Phantom, GSM 850 Channel 192)

GSM 850 Towards Phantom Low

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 55.6$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.52, 6.52, 6.52);

Electronics: DAE4 Sn679;

Towards phantom,Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.251 mW/g

Towards phantom,Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.235 mW/g; SAR(10 g) = 0.169 mW/g

Maximum value of SAR (measured) = 0.249 mW/g

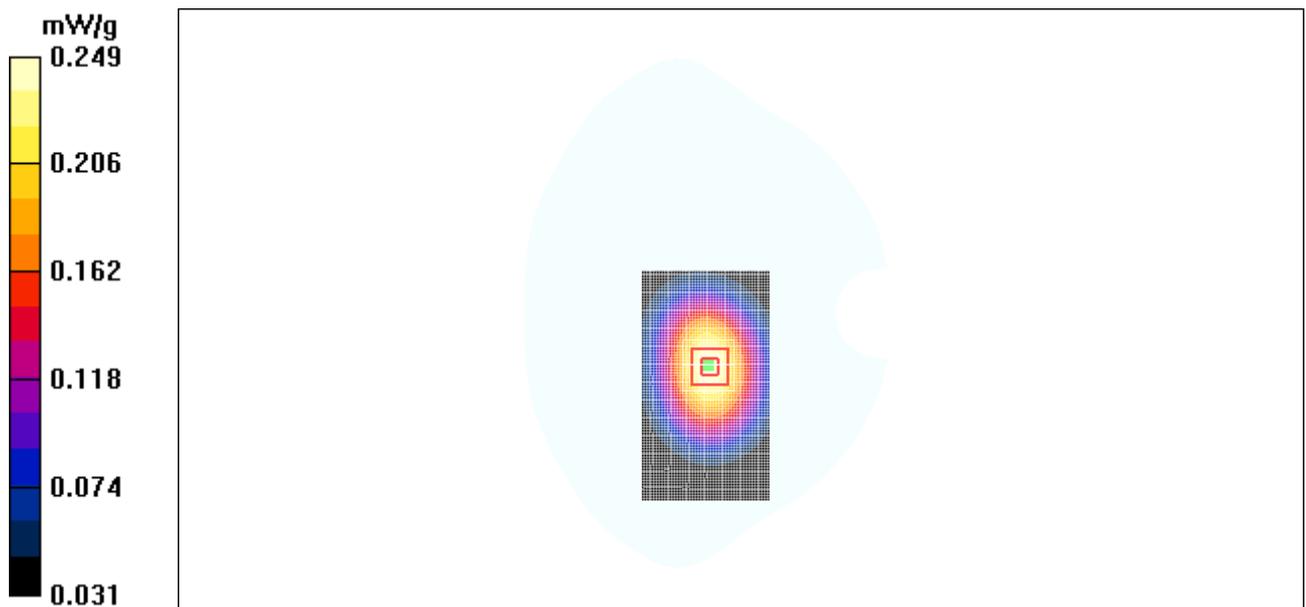


Figure 42 Body, Towards Phantom, GSM 850 Channel 128

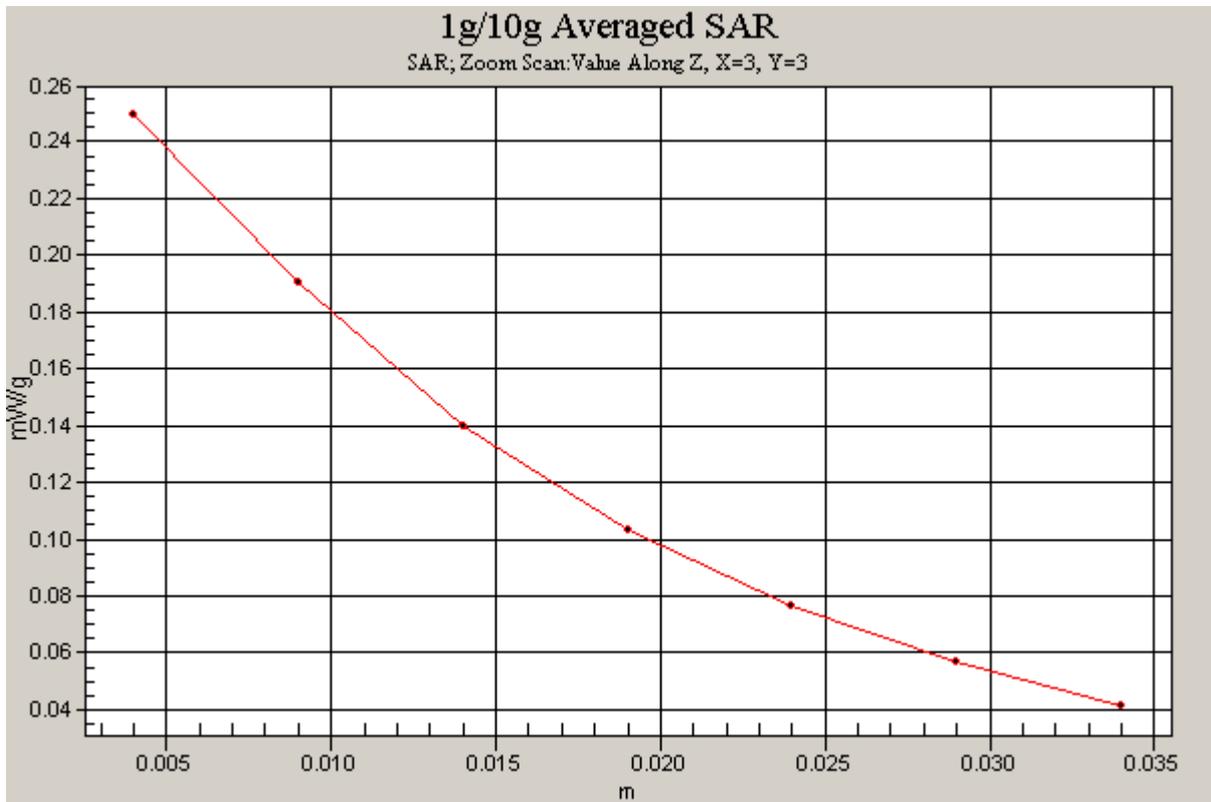


Figure 43 Z-Scan at power reference point (Body, Towards Phantom, GSM 850 Channel 128)

GSM 850 Earphone Towards Ground Low

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 55.6$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.52, 6.52, 6.52);

Electronics: DAE4 Sn679;

Towards ground,Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.445 mW/g

Towards ground,Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.5 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.518 W/kg

SAR(1 g) = 0.414 mW/g; SAR(10 g) = 0.301 mW/g

Maximum value of SAR (measured) = 0.441 mW/g

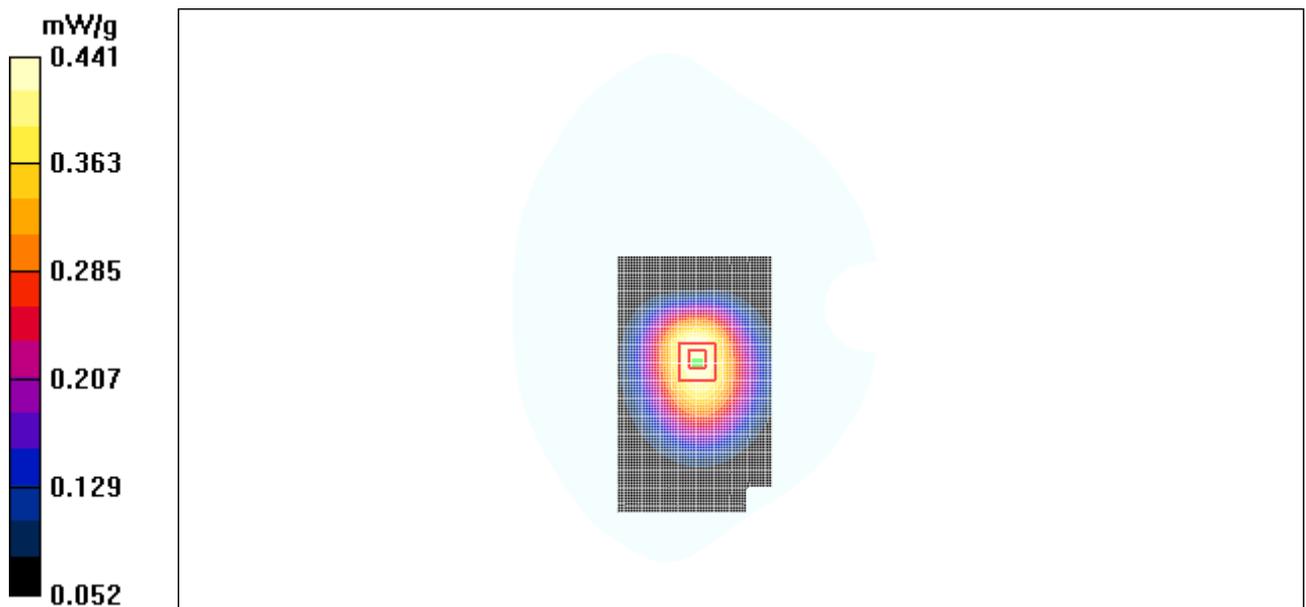


Figure 44 Body with Earphone, Towards Ground, GSM 850, Channel 128

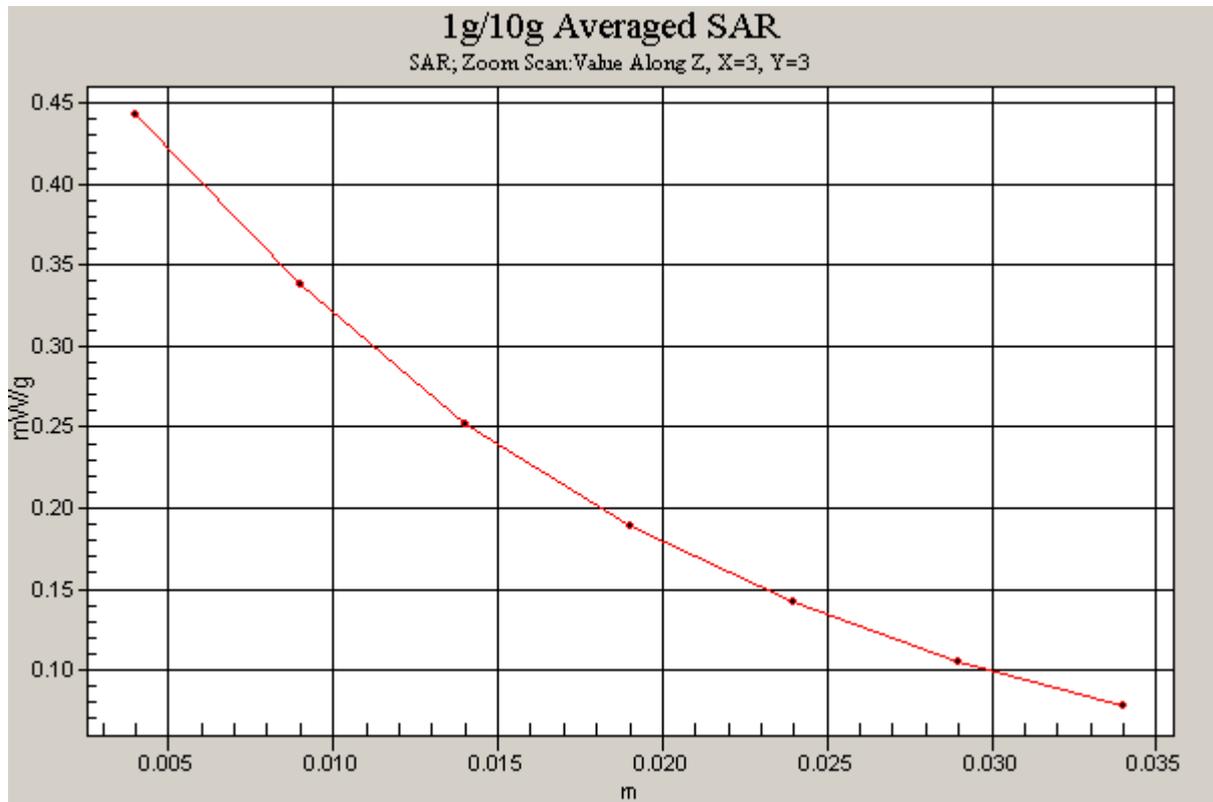


Figure 45 Z-Scan at power reference point (Body with Earphone, Towards Ground, GSM 850, Channel 128)

GSM 850 GPRS Towards Ground High

Communication System: GSM850 + GPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 849$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.52, 6.52, 6.52);

Electronics: DAE4 Sn679;

Towards ground,High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.828 mW/g

Towards ground,High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.4 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.989 W/kg

SAR(1 g) = 0.783 mW/g; SAR(10 g) = 0.566 mW/g

Maximum value of SAR (measured) = 0.830 mW/g

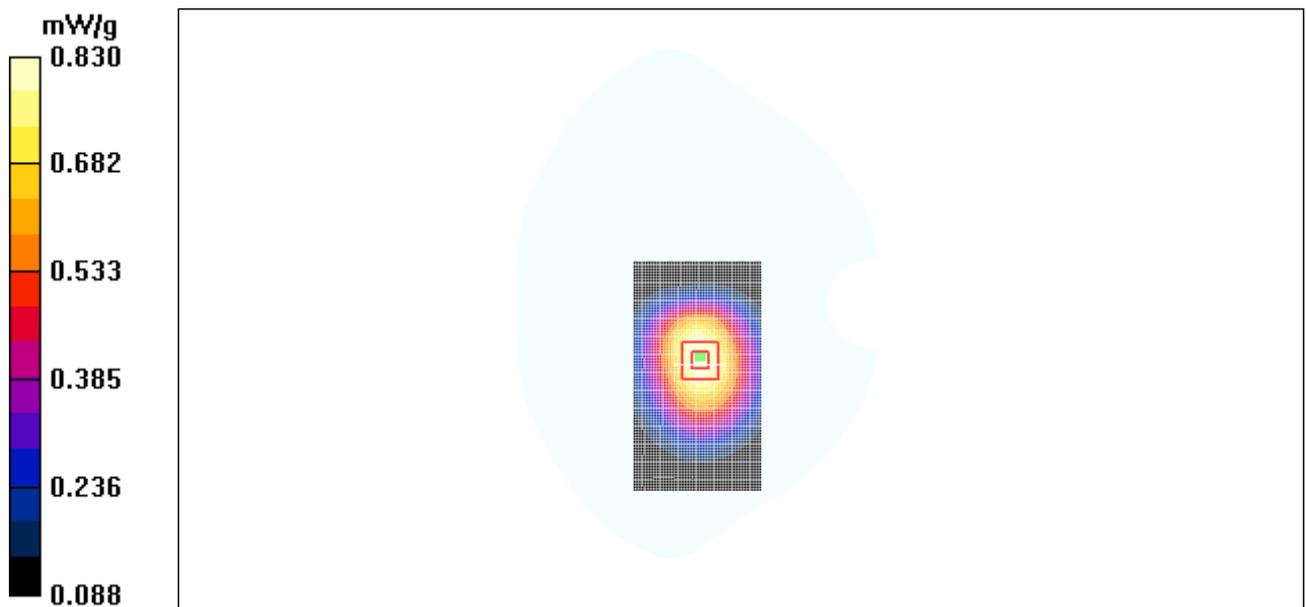


Figure 46 Body, Towards Ground, GSM 850 GPRS, Channel 251

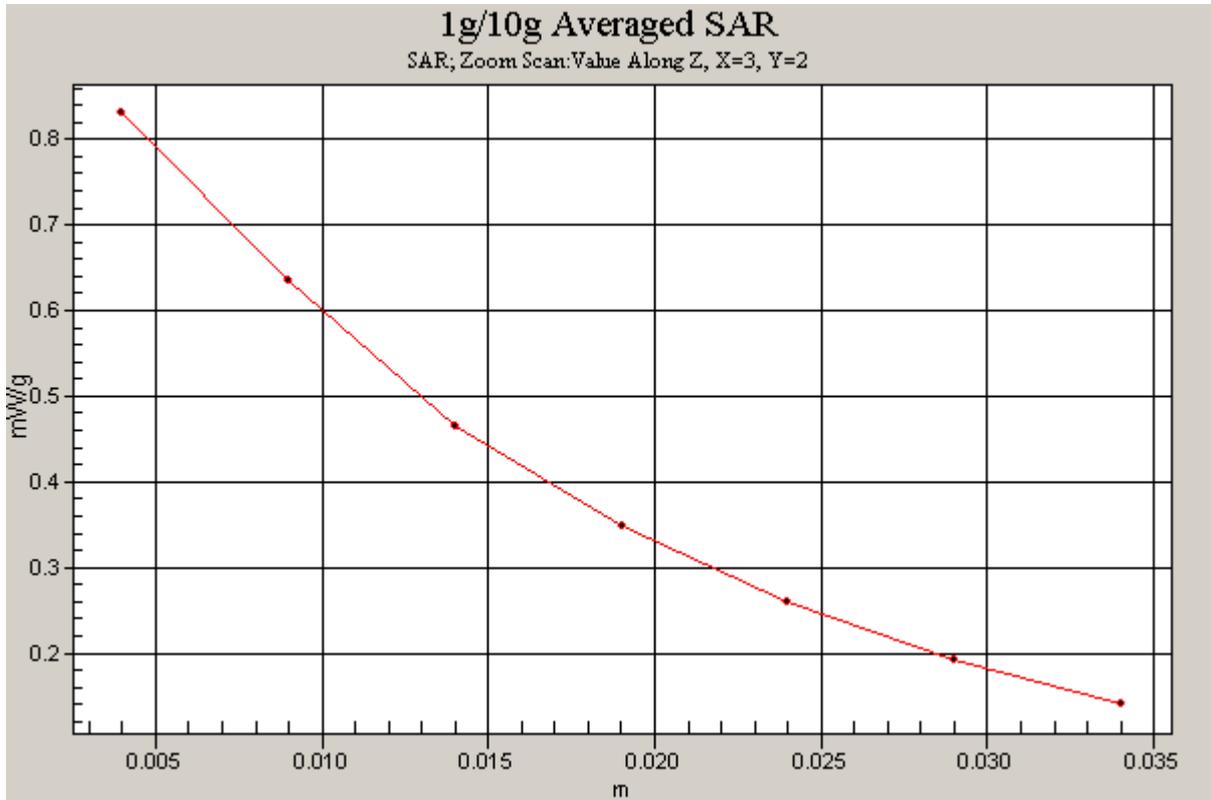


Figure 47 Z-Scan at power reference point (Body, Towards Ground, GSM 850 GPRS, Channel 251)

GSM 850 GPRS Towards Ground Middle

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 837$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.52, 6.52, 6.52);

Electronics: DAE4 Sn679;

Towards ground,Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.965 mW/g

Towards ground,Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.1 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.900 mW/g; SAR(10 g) = 0.654 mW/g

Maximum value of SAR (measured) = 0.957 mW/g

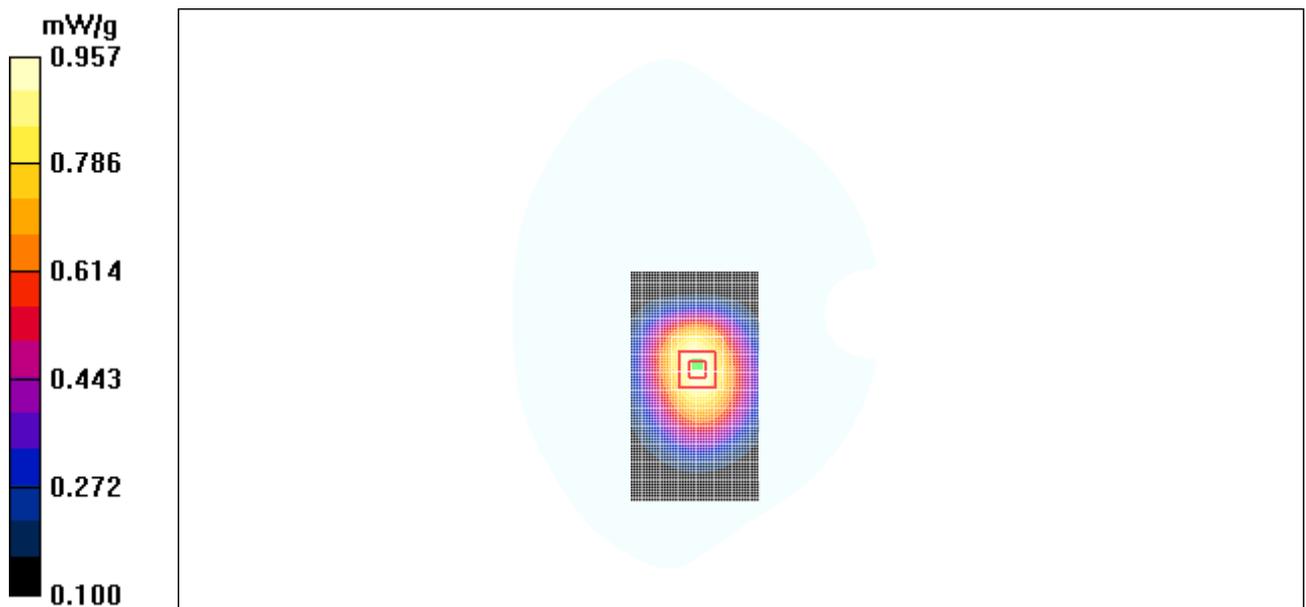


Figure 48 Body, Towards Ground, GSM 850 GPRS Channel 192

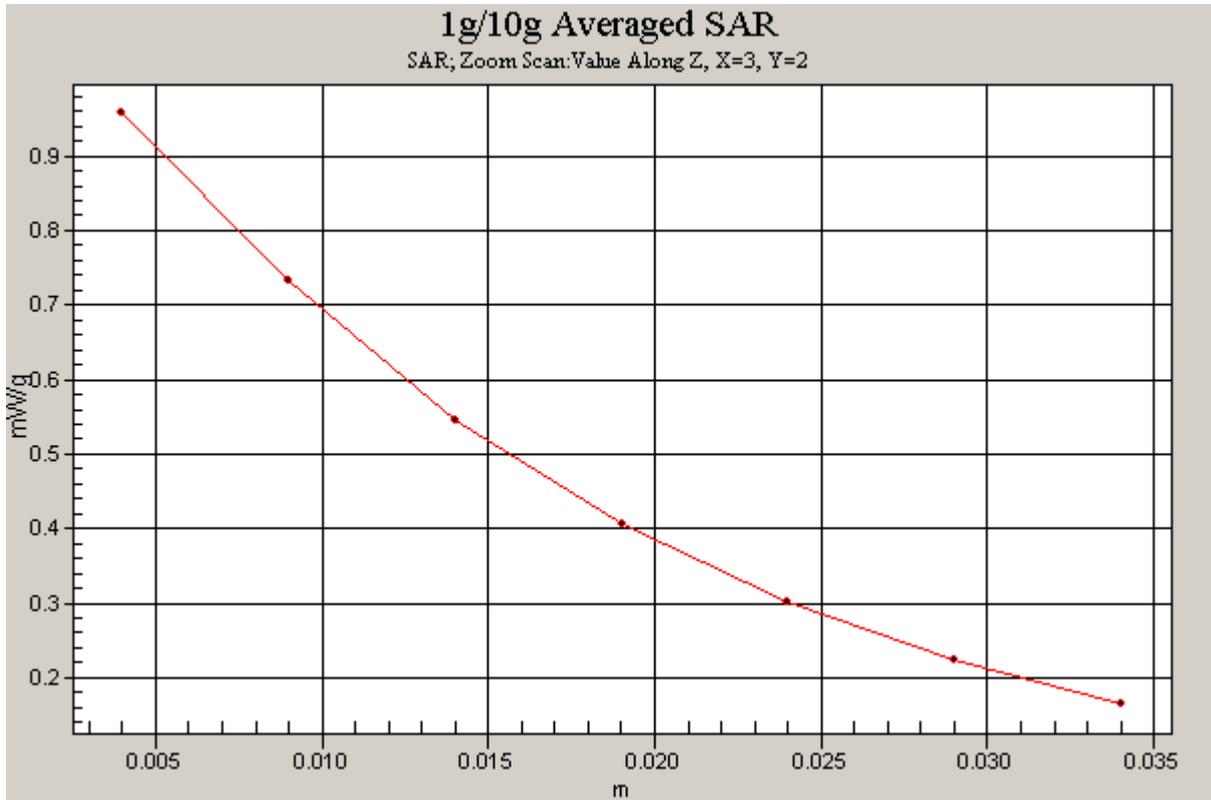


Figure 49 Z-Scan at power reference point (Body, Towards Ground, GSM 850 GPRS Channel 192)

GSM 850 GPRS Towards Ground Low

Communication System: GSM850 + GPRS(2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 55.6$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.52, 6.52, 6.52);

Electronics: DAE4 Sn679;

Towards ground,Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.08 mW/g

Towards ground,Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.1 V/m; Power Drift = 0.066 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.991 mW/g; SAR(10 g) = 0.720 mW/g

Maximum value of SAR (measured) = 1.05 mW/g

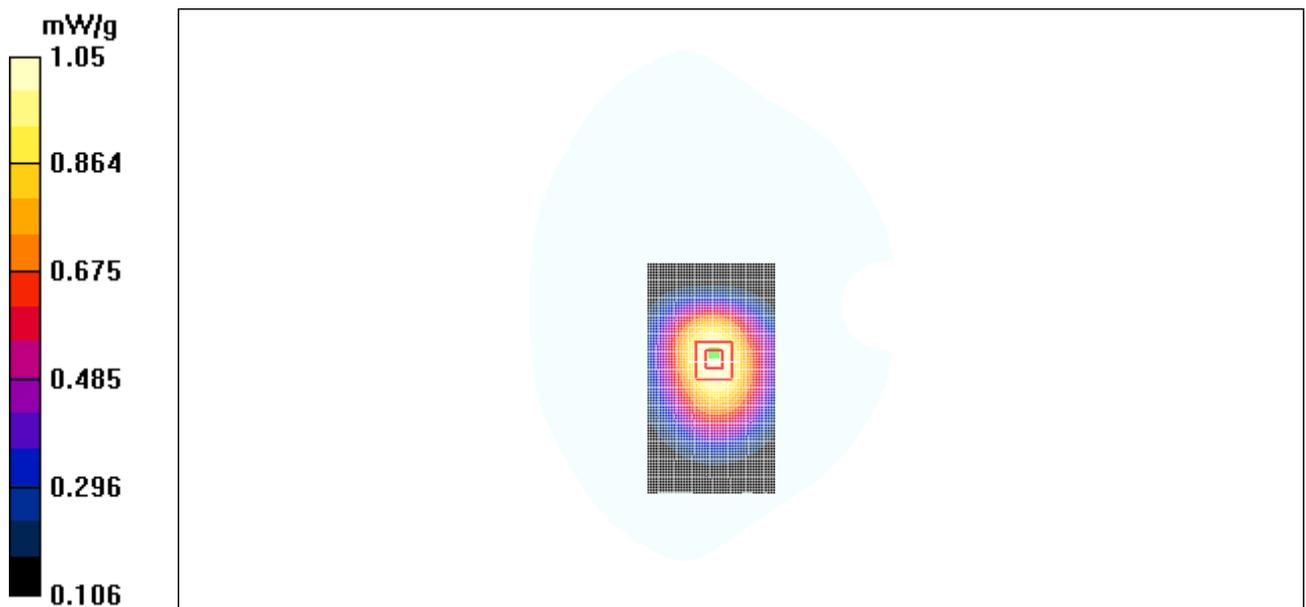


Figure 50 Body, Towards Ground, GSM 850 GPRS Channel 128

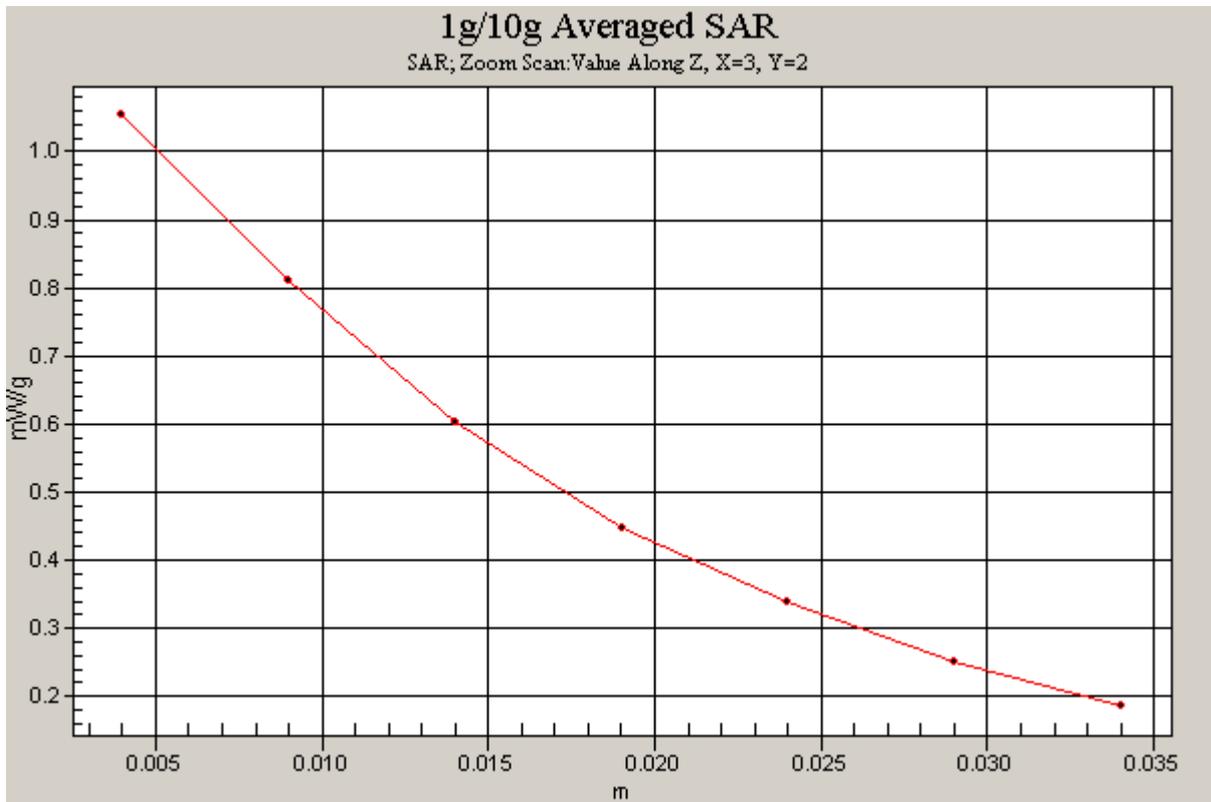


Figure 51 Z-Scan at power reference point (Body, Towards Ground, GSM 850 GPRS Channel 128)

GSM 850 GPRS Towards Phantom High

Communication System: GSM850 + GPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 849$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.52, 6.52, 6.52);

Electronics: DAE4 Sn679;

Towards phantom, High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.512 mW/g

Towards phantom, High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.605 W/kg

SAR(1 g) = 0.482 mW/g; SAR(10 g) = 0.345 mW/g

Maximum value of SAR (measured) = 0.512 mW/g

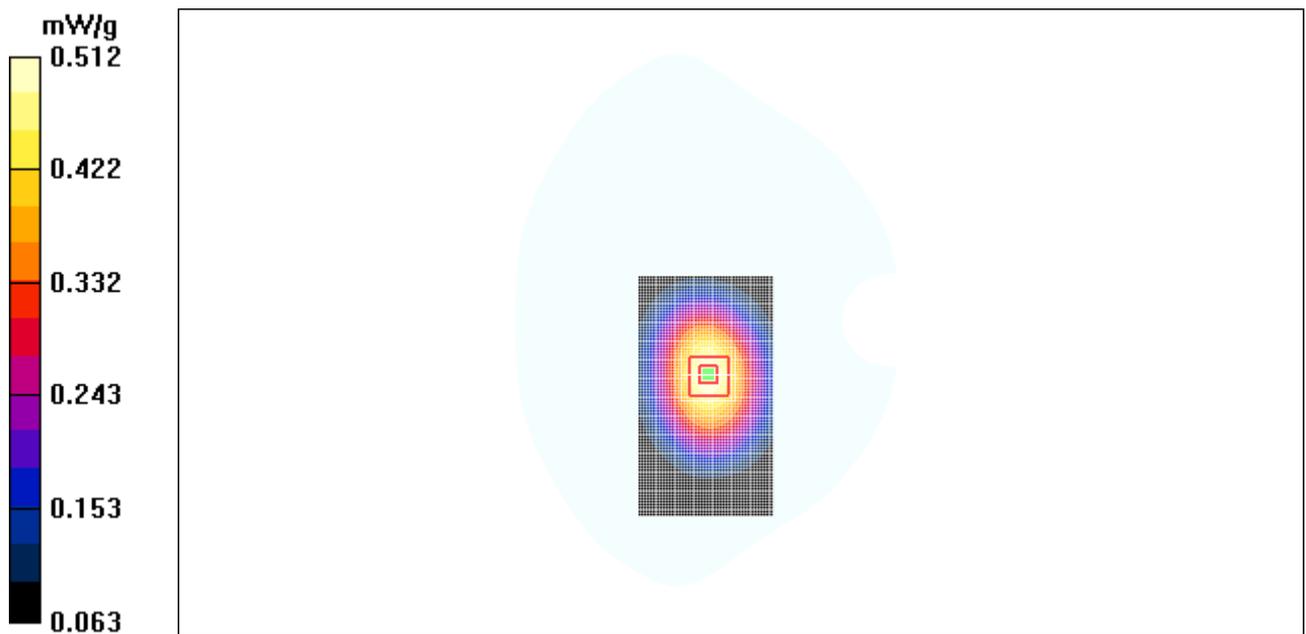


Figure 52 Body, Towards Phantom, GSM 850 GPRS, Channel 251

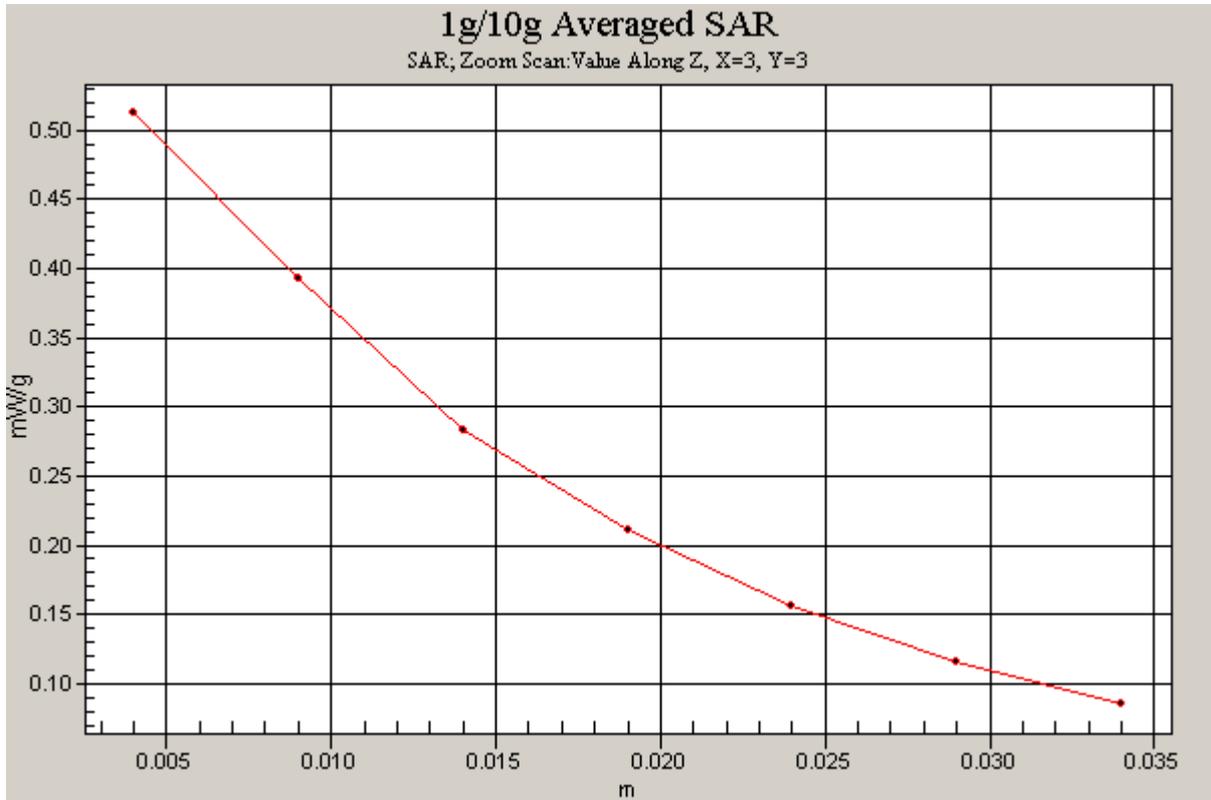


Figure 53 Z-Scan at power reference point (Body, Towards Phantom, GSM 850 GPRS, Channel 251)

GSM 850 GPRS Towards Phantom Middle

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 837$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.52, 6.52, 6.52);

Electronics: DAE4 Sn679;

Towards phantom, Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.584 mW/g

Towards phantom, Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.6 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.703 W/kg

SAR(1 g) = 0.550 mW/g; SAR(10 g) = 0.394 mW/g

Maximum value of SAR (measured) = 0.585 mW/g

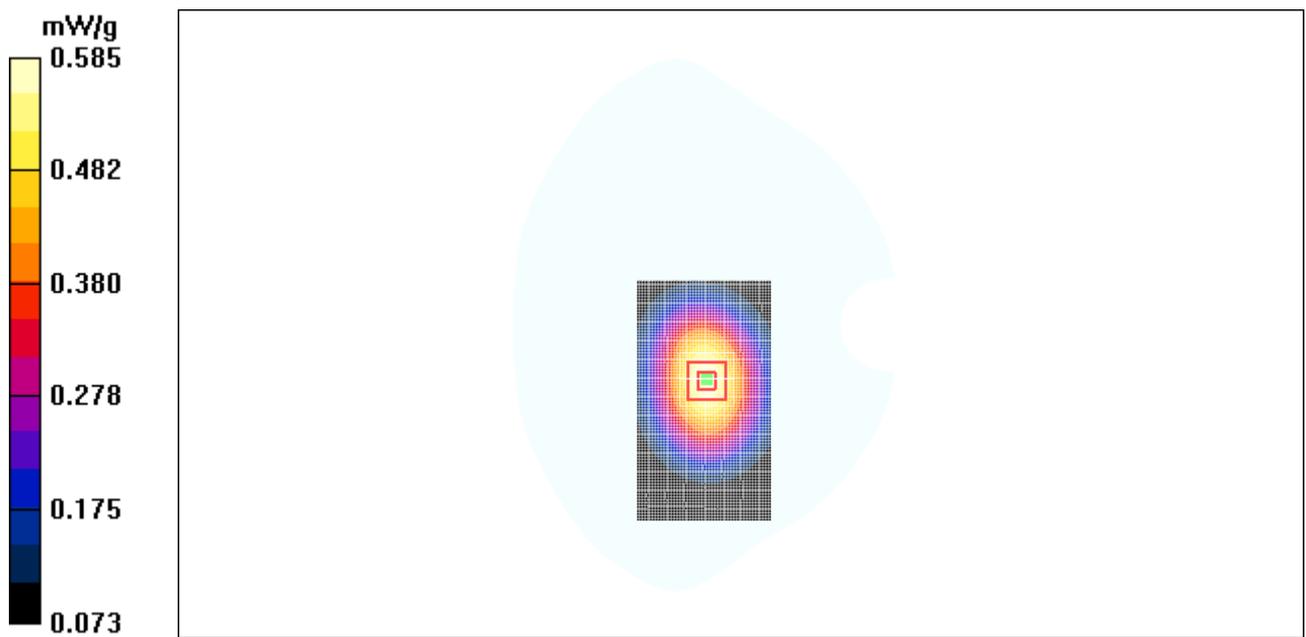


Figure 54 Body, Towards Phantom, GSM 850 GPRS Channel 192

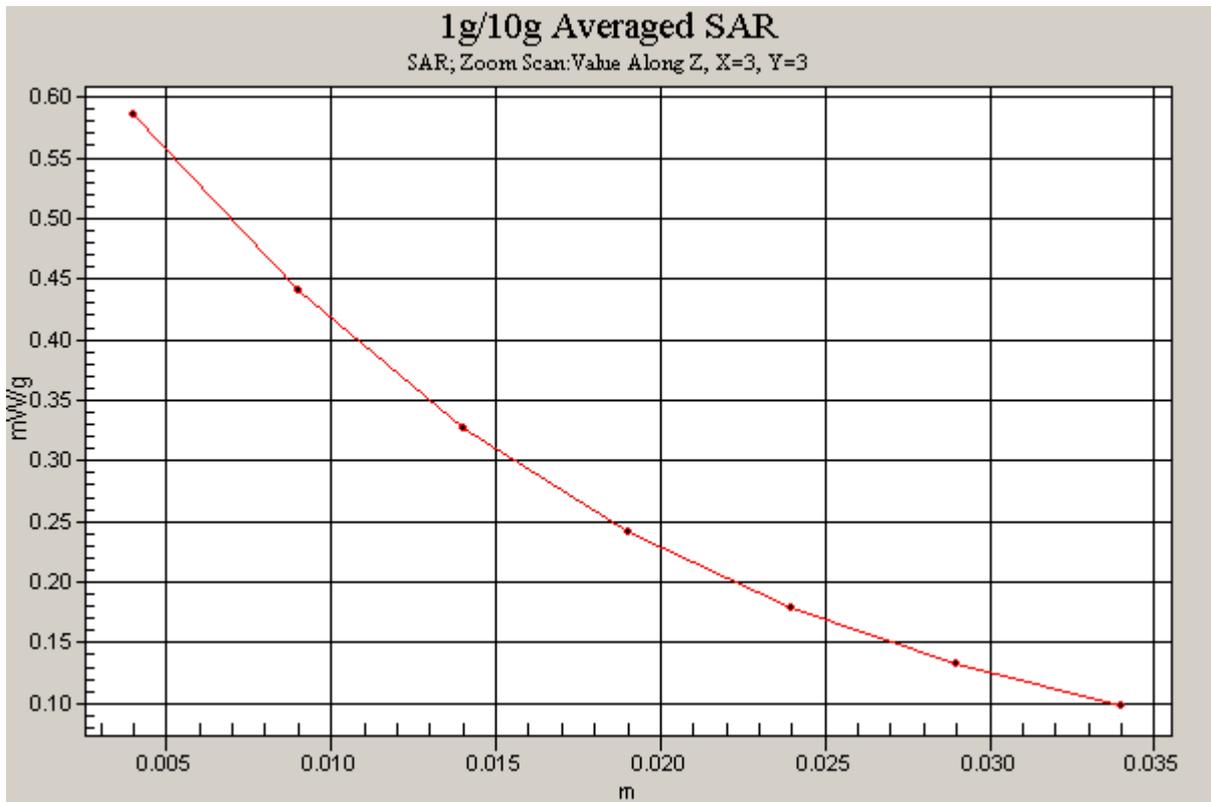


Figure 55 Z-Scan at power reference point (Body, Towards Phantom, GSM 850 GPRS Channel 192)

GSM 850 GPRS Towards Phantom Low

Communication System: GSM850 + GPRS(2Up); Frequency: 824.2 MHz;Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 55.6$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(6.52, 6.52, 6.52);

Electronics: DAE4 Sn679;

Towards phantom,Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.507 mW/g

Towards phantom,Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.6 V/m; Power Drift = -0.117 dB

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.338 mW/g

Maximum value of SAR (measured) = 0.498 mW/g

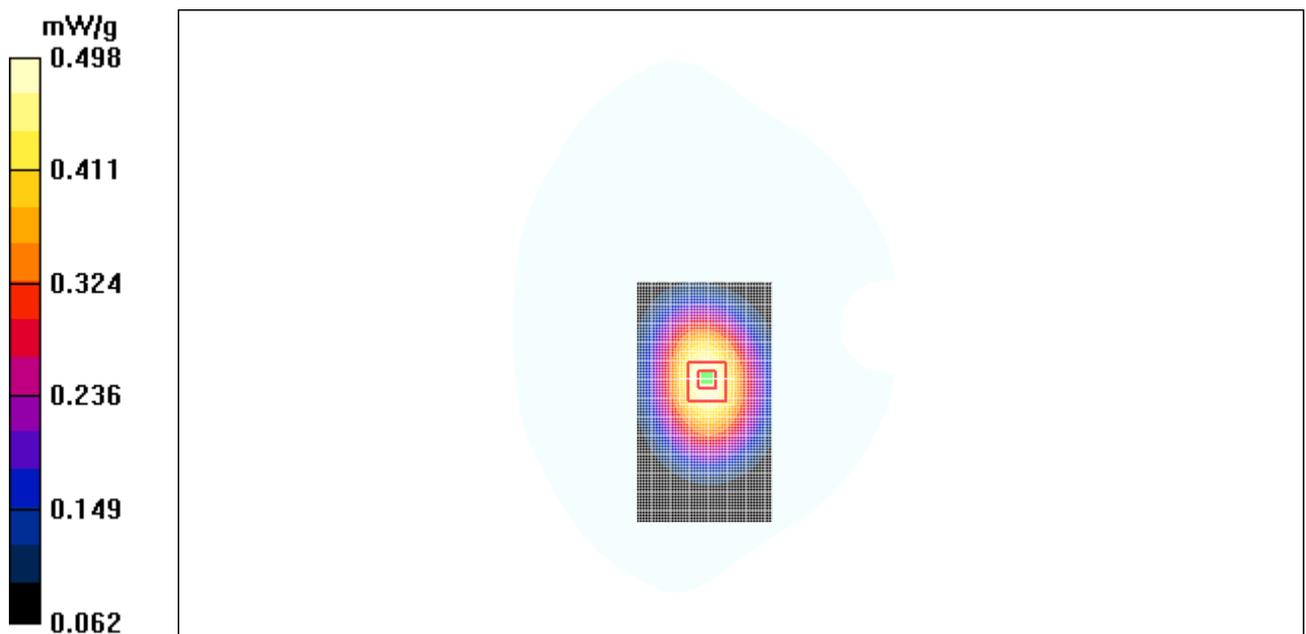


Figure 56 Body, Towards Phantom, GSM 850 GPRS Channel 128

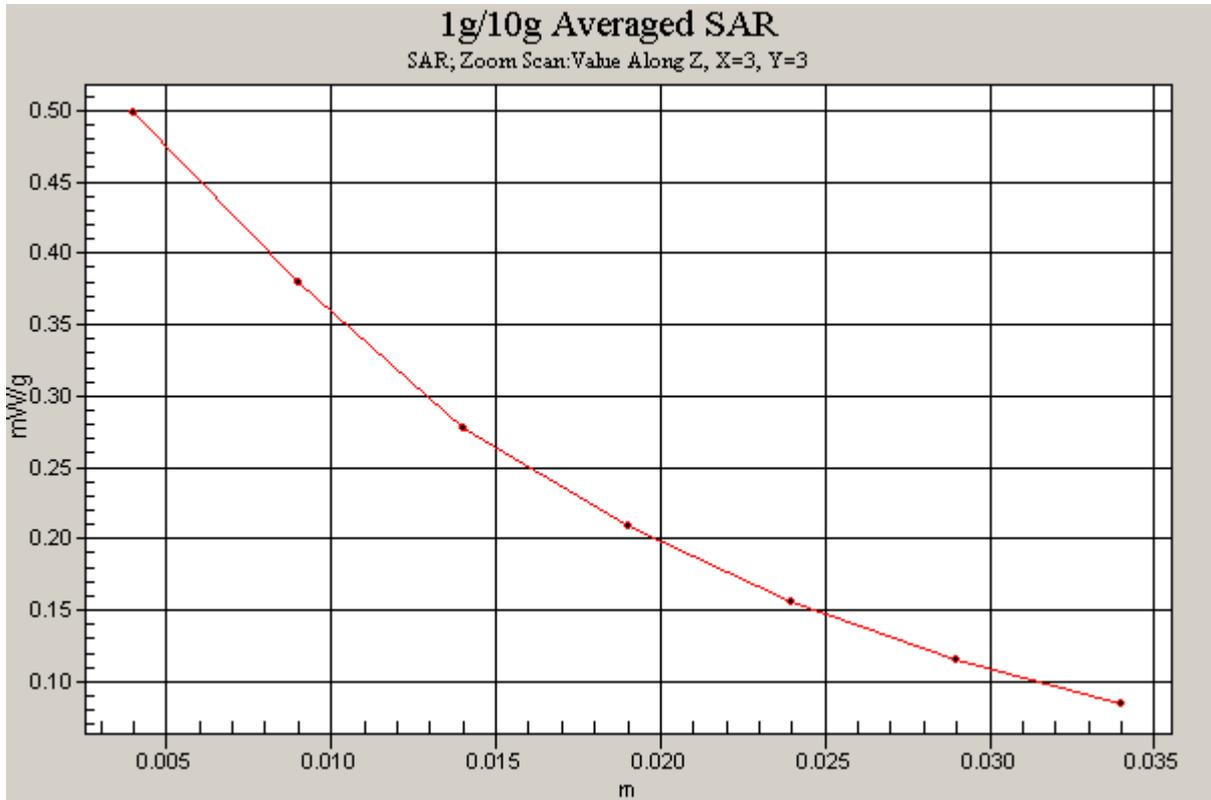


Figure 57 Z-Scan at power reference point (Body, Towards Phantom, GSM 850 GPRS Channel 128)

GSM 1900 Left Cheek High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn679;

Cheek High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.426 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.607 W/kg

SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.210 mW/g

Maximum value of SAR (measured) = 0.421 mW/g

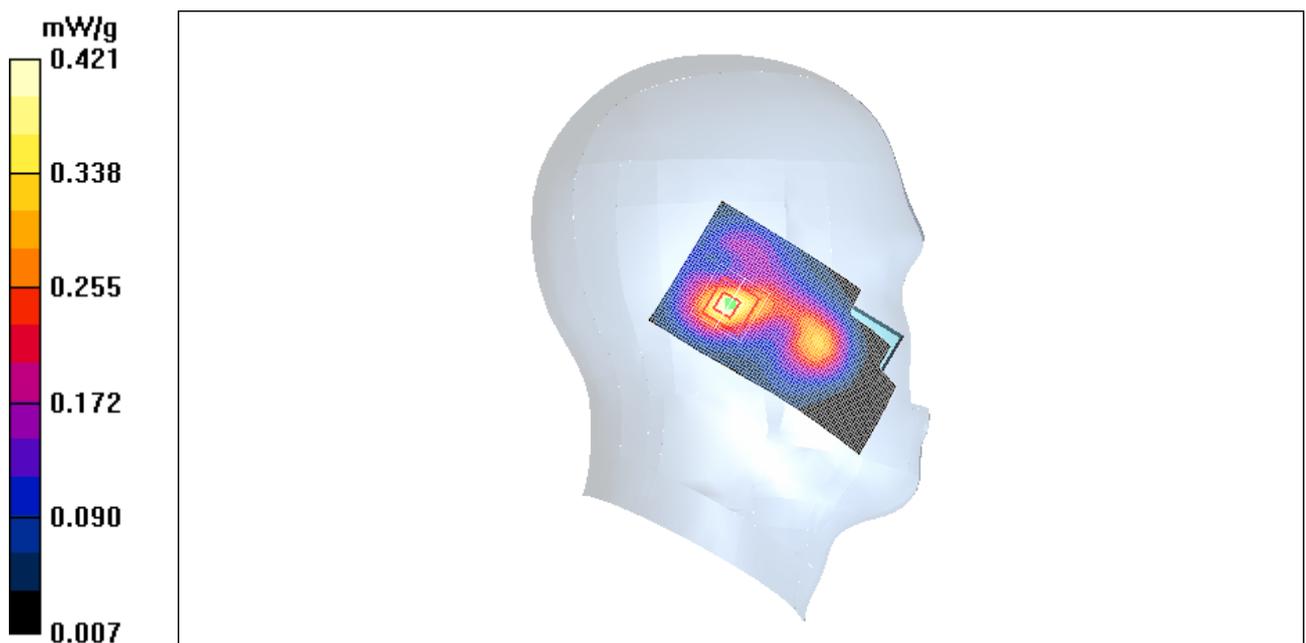


Figure 58 Left Hand Touch Cheek GSM 1900 Channel 810

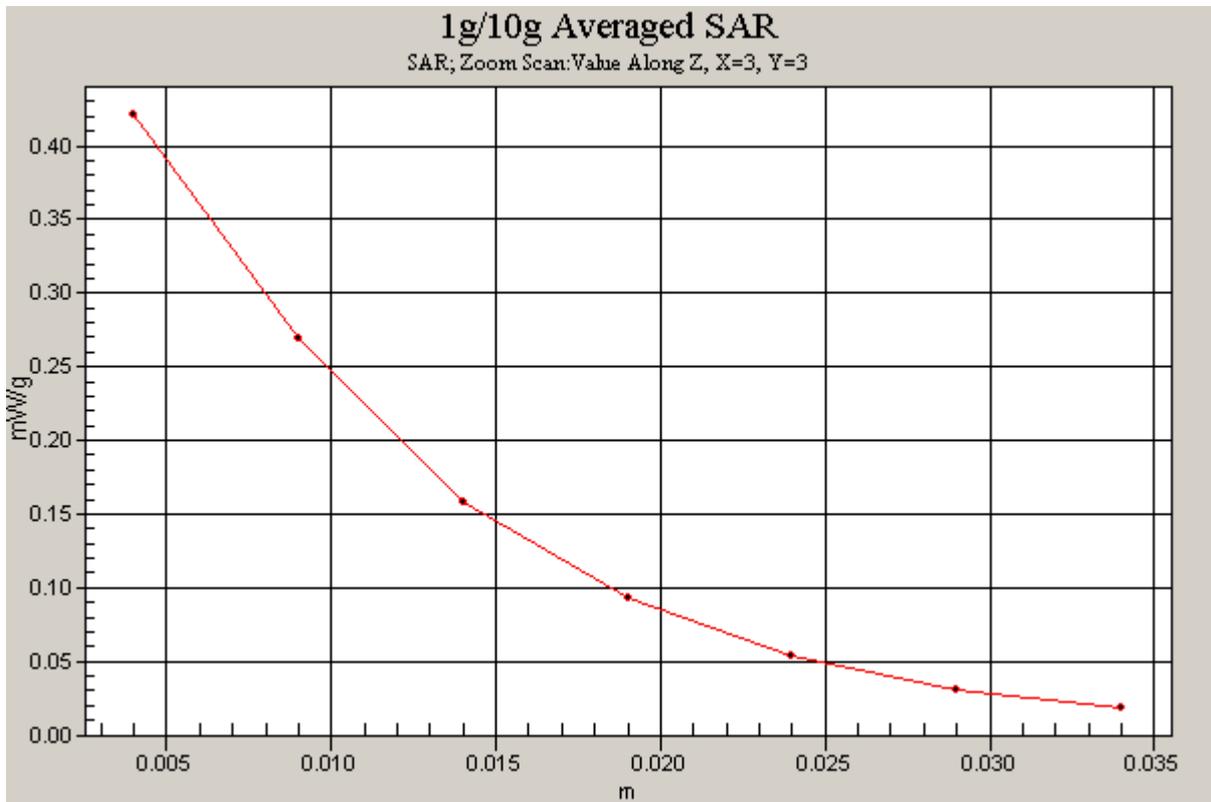


Figure 59 Z-Scan at power reference point (Left Hand Touch Cheek GSM 1900 Channel 810)

GSM 1900 Left Cheek Middle

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn679;

Cheek Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.523 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.716 W/kg

SAR(1 g) = 0.464 mW/g; SAR(10 g) = 0.257 mW/g

Maximum value of SAR (measured) = 0.522 mW/g

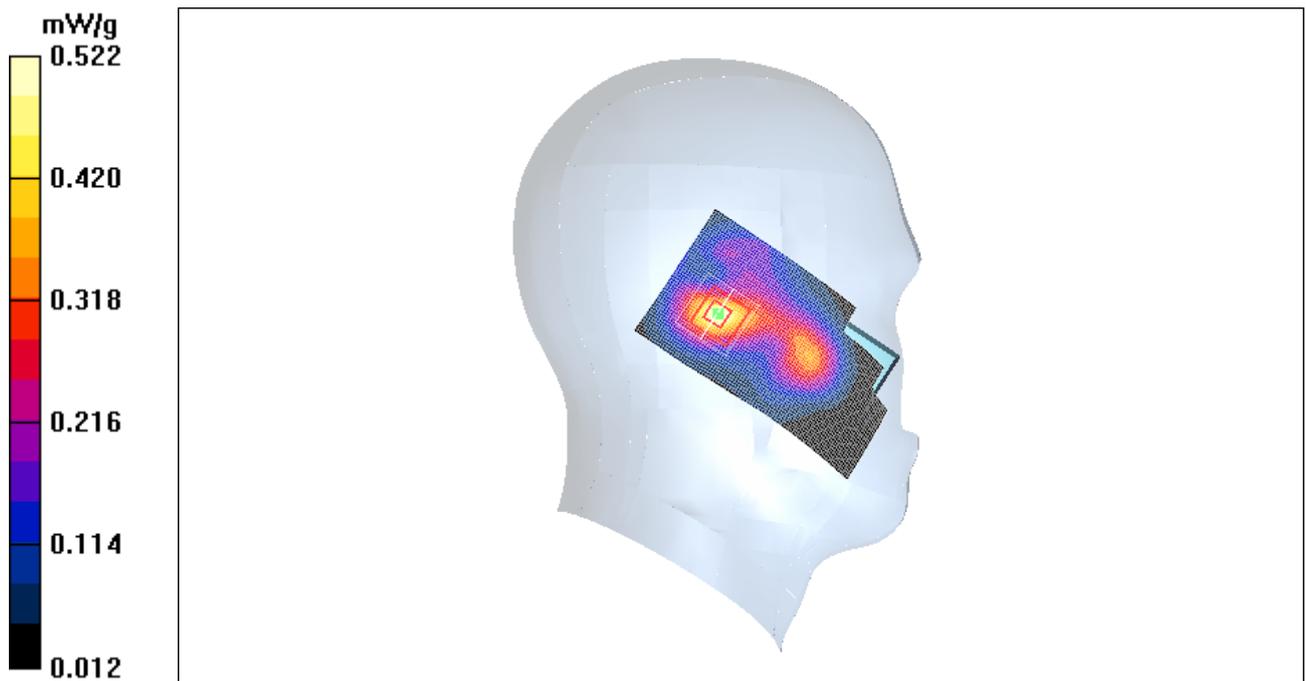


Figure 60 Left Hand Touch Cheek GSM 1900 Channel 661

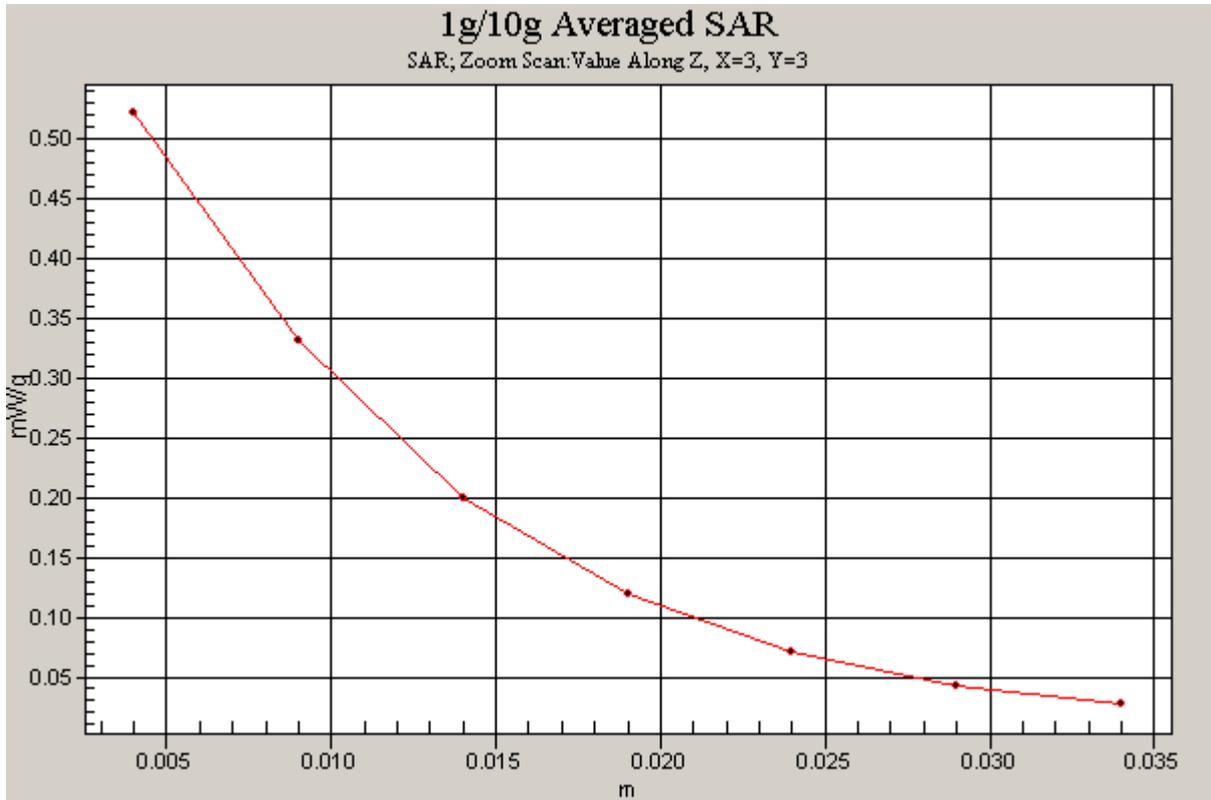


Figure 61 Z-Scan at power reference point (Left Hand Touch Cheek GSM 1900 Channel 661)

GSM 1900 Left Cheek Low

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn679;

Cheek Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.371 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.526 W/kg

SAR(1 g) = 0.333 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.369 mW/g

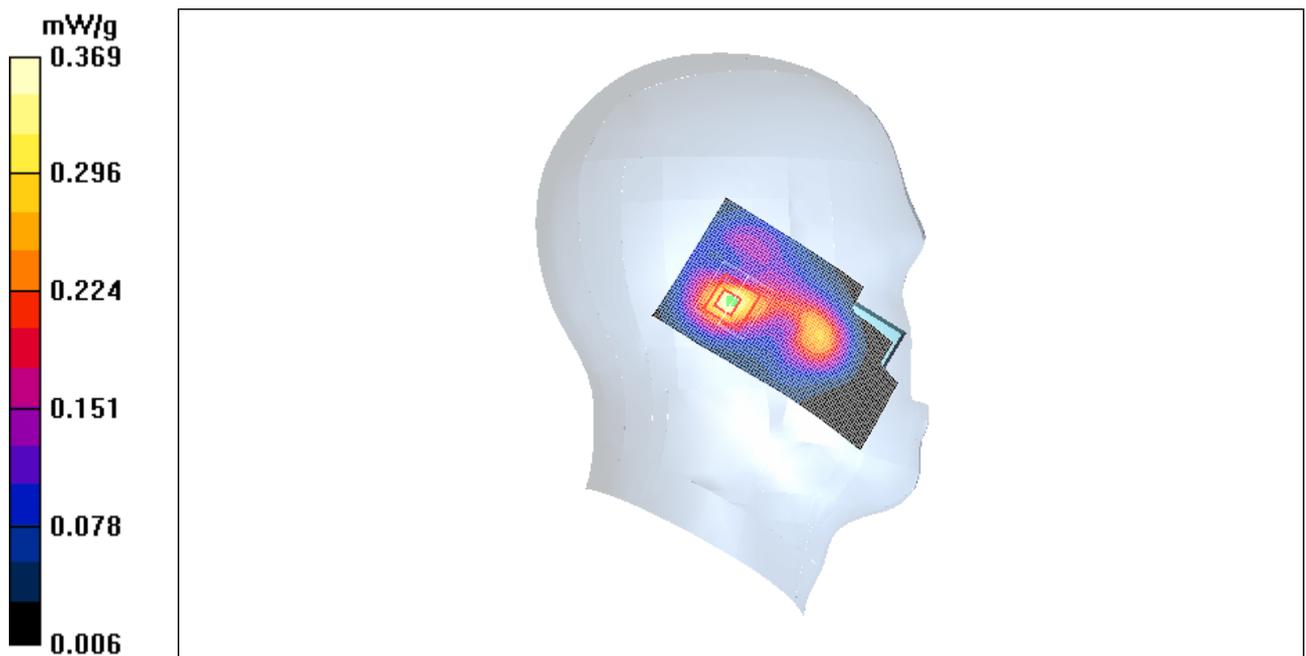


Figure 62 Left Hand Touch Cheek GSM 1900 Channel 512

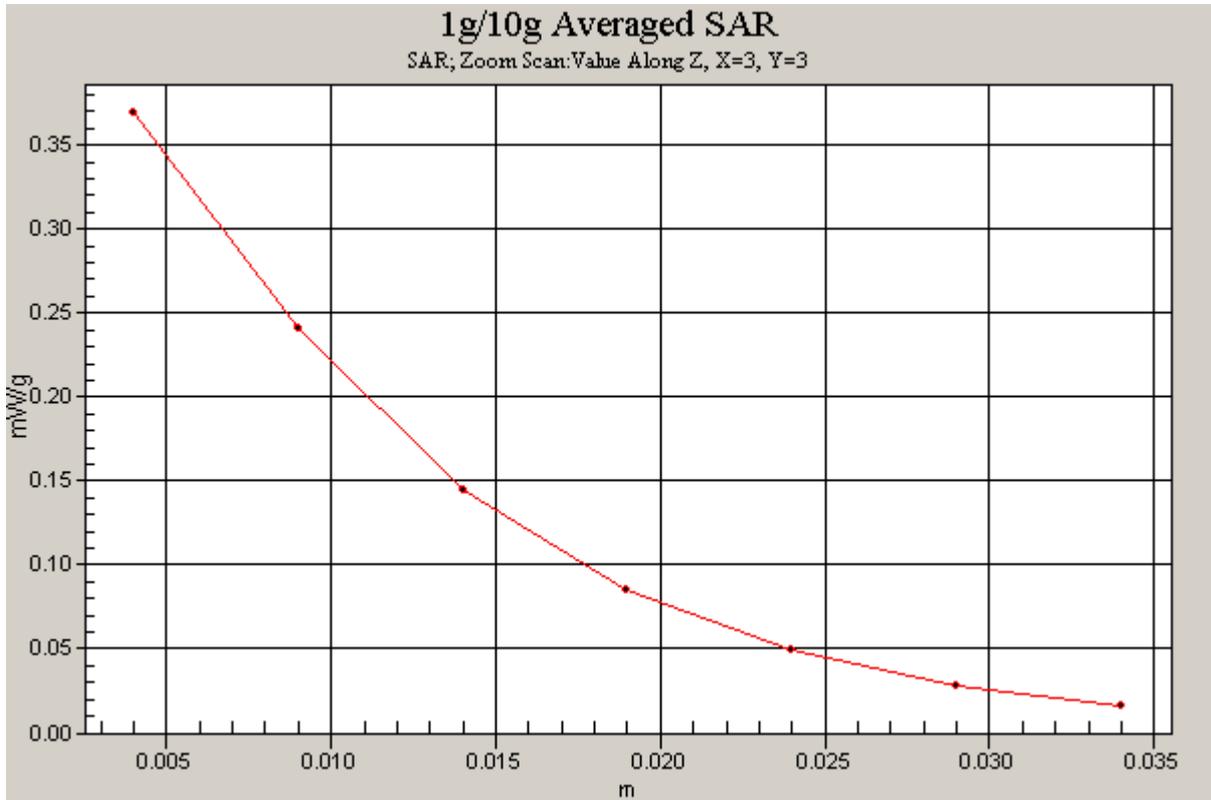


Figure 63 Z-Scan at power reference point (Left Hand Touch Cheek GSM 1900 Channel 512)

GSM 1900 Left Tilt High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn679;

Tilt High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.442 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.4 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.644 W/kg

SAR(1 g) = 0.394 mW/g; SAR(10 g) = 0.210 mW/g

Maximum value of SAR (measured) = 0.440 mW/g

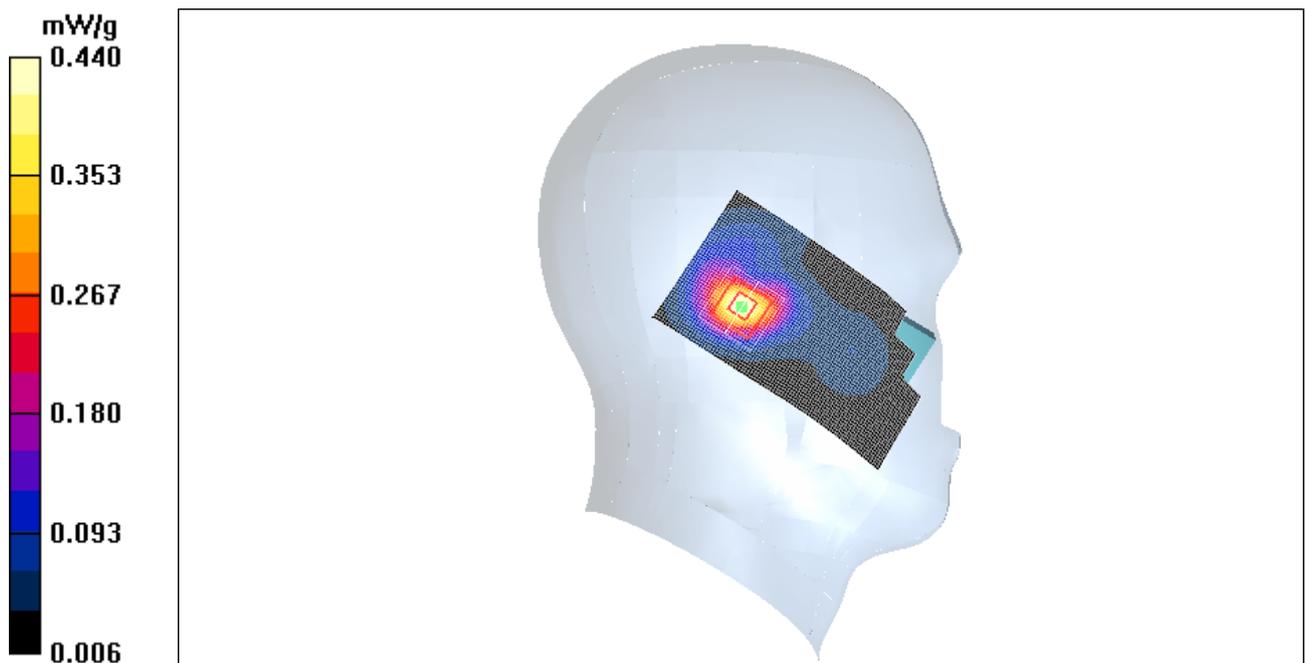


Figure 64 Left Hand Tilt 15° GSM 1900 Channel 810

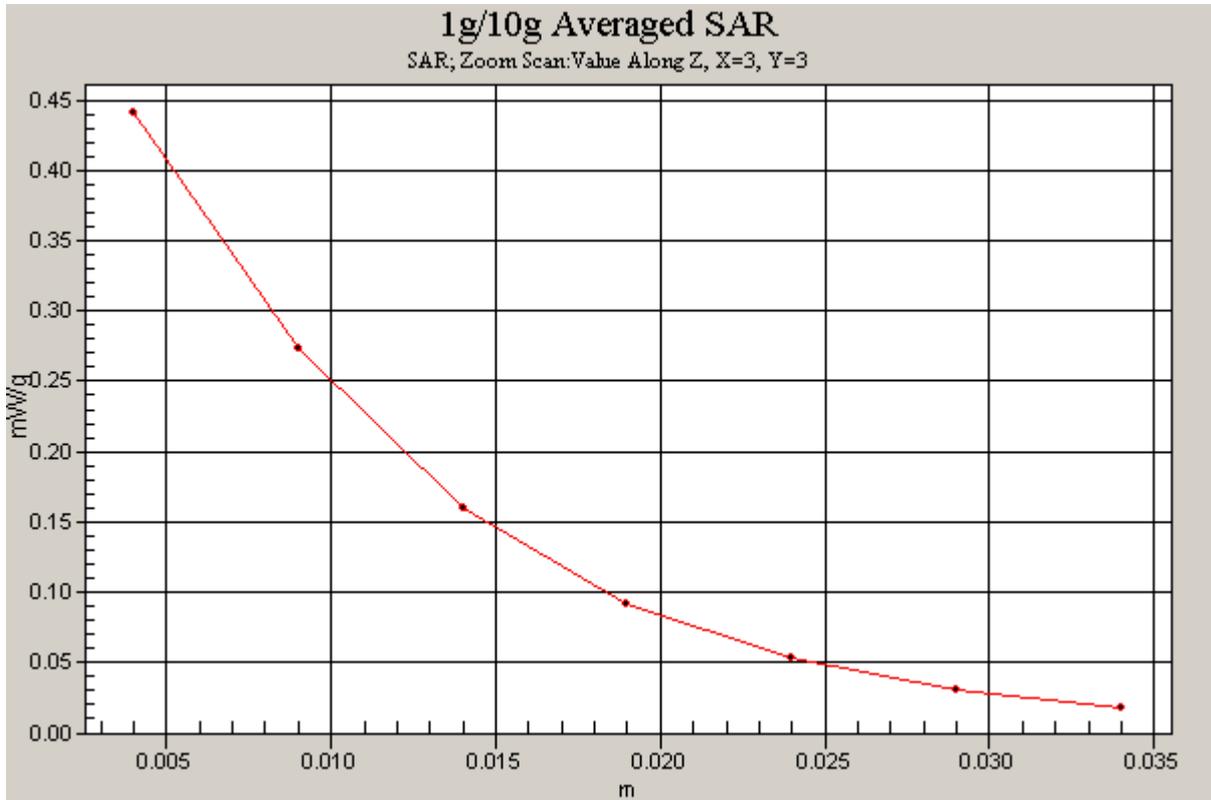


Figure 65 Z-Scan at power reference point (Left Hand Tilt 15° GSM 1900 Channel 810)

GSM 1900 Left Tilt Middle

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn679;

Tilt Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.542 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 0.802 W/kg

SAR(1 g) = 0.492 mW/g; SAR(10 g) = 0.262 mW/g

Maximum value of SAR (measured) = 0.555 mW/g

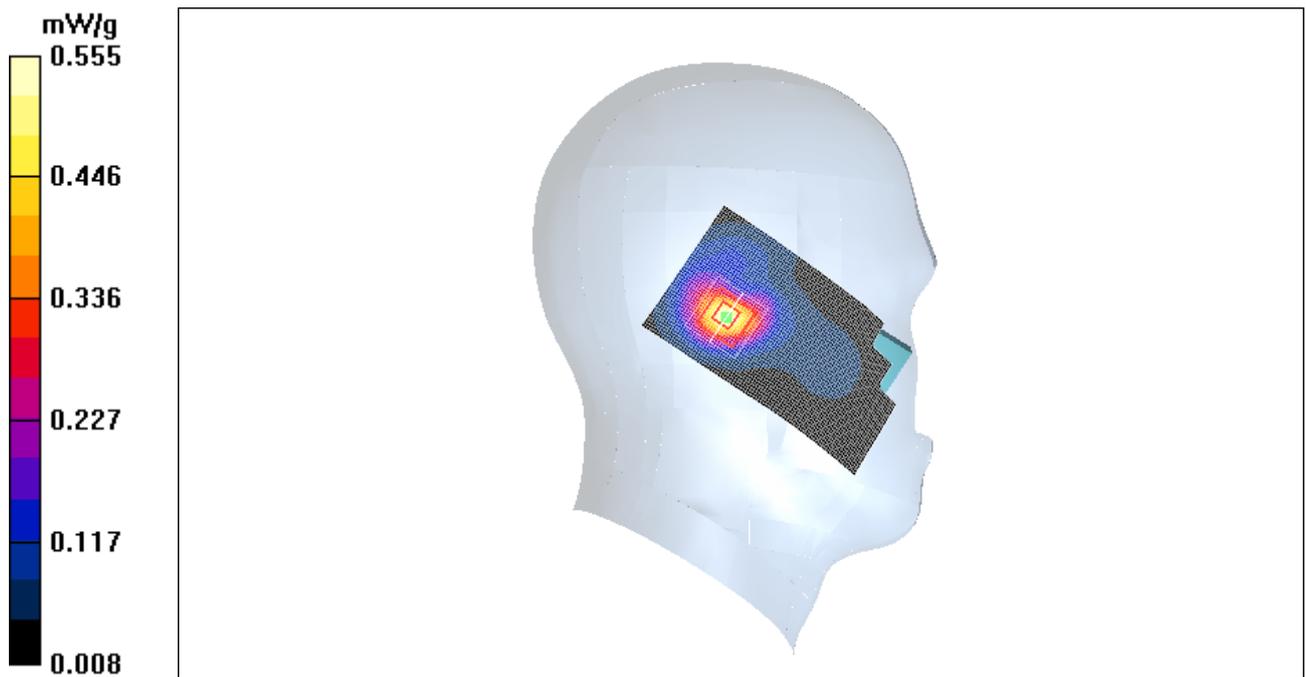


Figure 66 Left Hand Tilt 15 ° GSM 1900 Channel 661

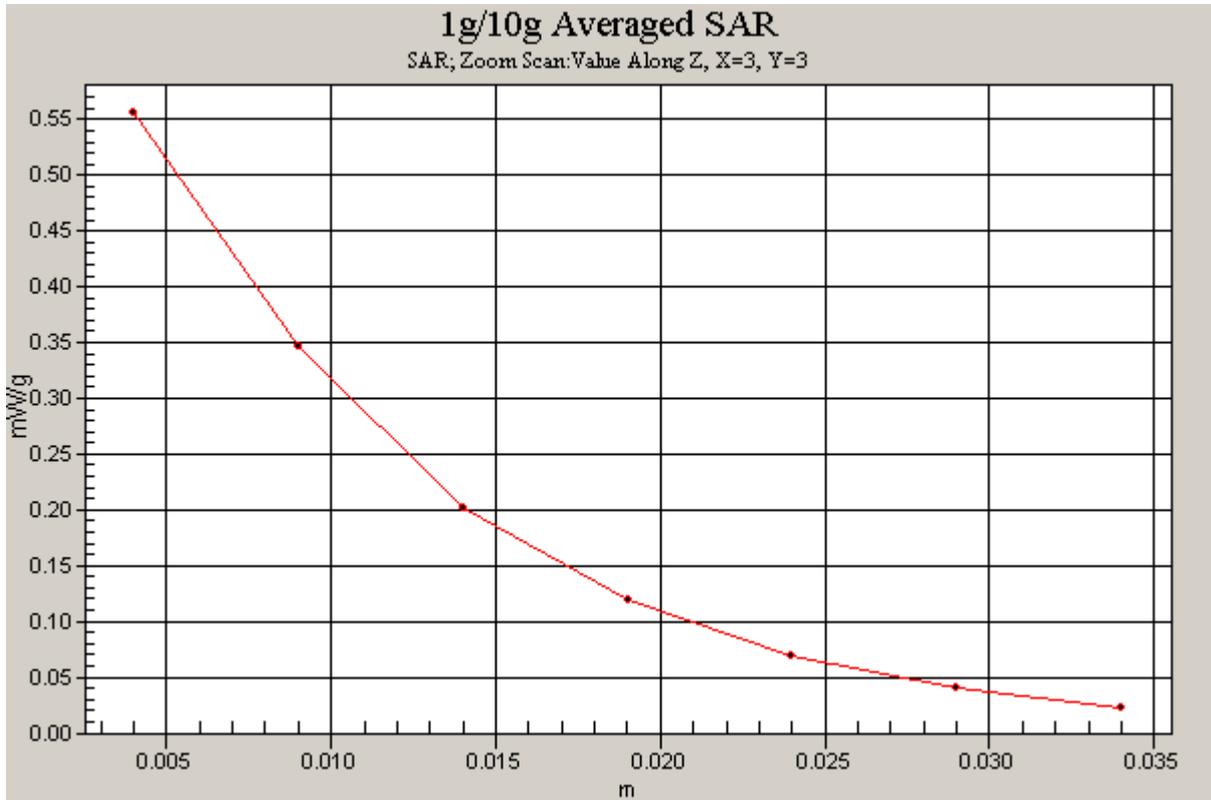


Figure 67 Z-Scan at power reference point (Left Hand Tilt 15 ° GSM 1900 Channel 661)

GSM 1900 Left Tilt Low

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn679;

Tilt Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.440 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = -0.145 dB

Peak SAR (extrapolated) = 0.620 W/kg

SAR(1 g) = 0.391 mW/g; SAR(10 g) = 0.211 mW/g

Maximum value of SAR (measured) = 0.440 mW/g

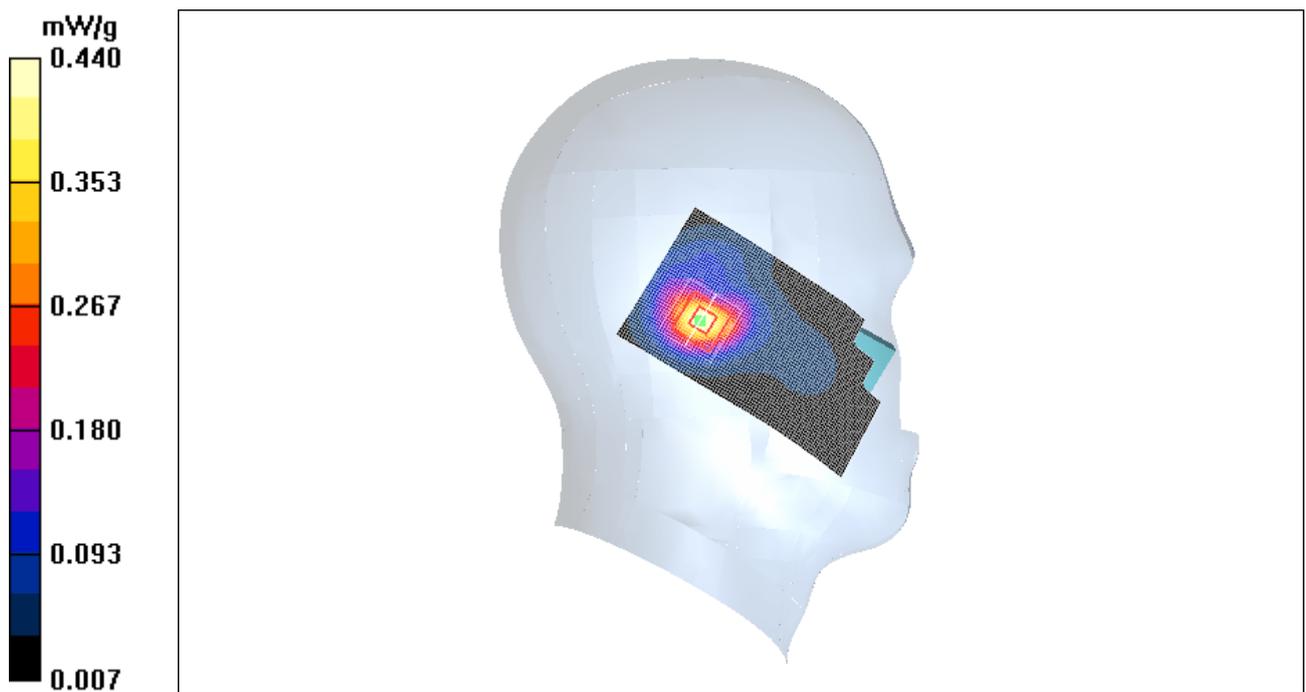


Figure 68 Left Hand Tilt 15 ° GSM 1900 Channel 512

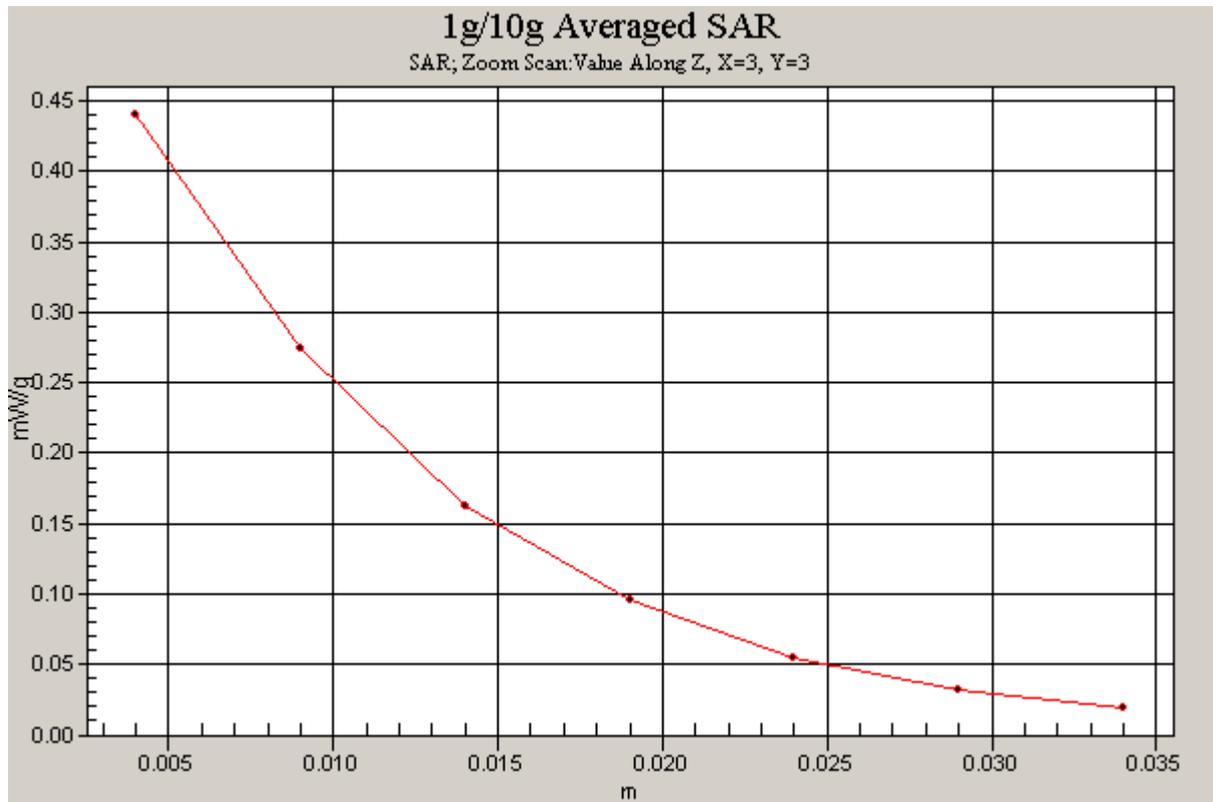


Figure 69 Z-Scan at power reference point (Left Hand Tilt 15 ° GSM 1900 Channel 512)

GSM 1900 Right Cheek High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn679;

Cheek High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.514 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.470 mW/g; SAR(10 g) = 0.246 mW/g

Maximum value of SAR (measured) = 0.536 mW/g

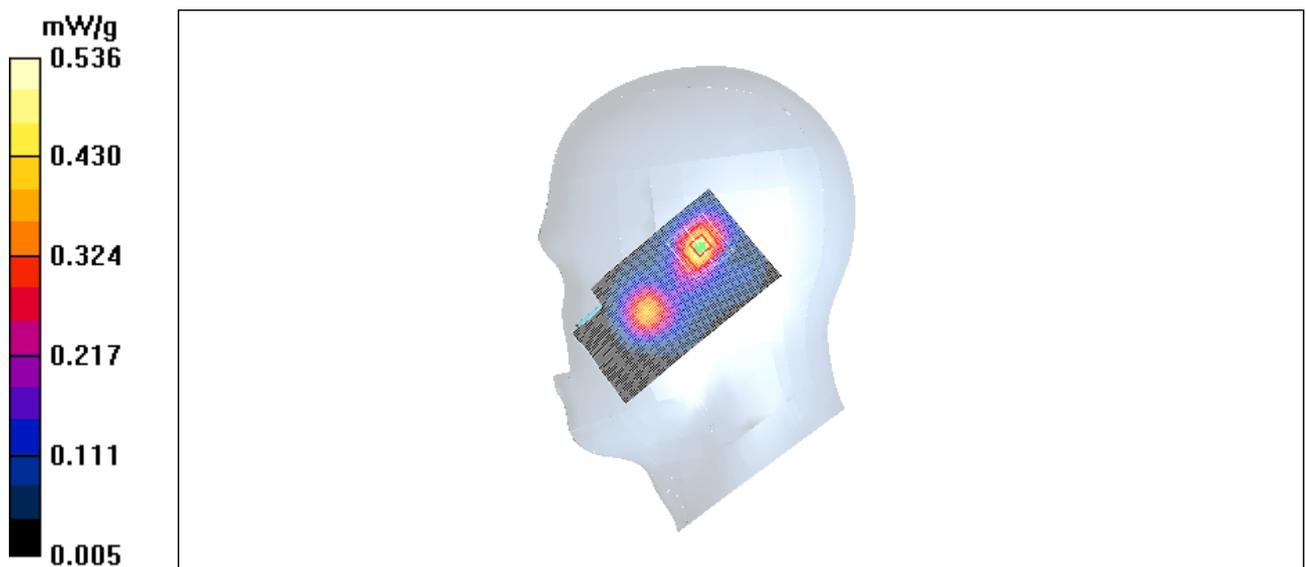


Figure 70 Right Hand Touch Cheek GSM 1900 Channel 810

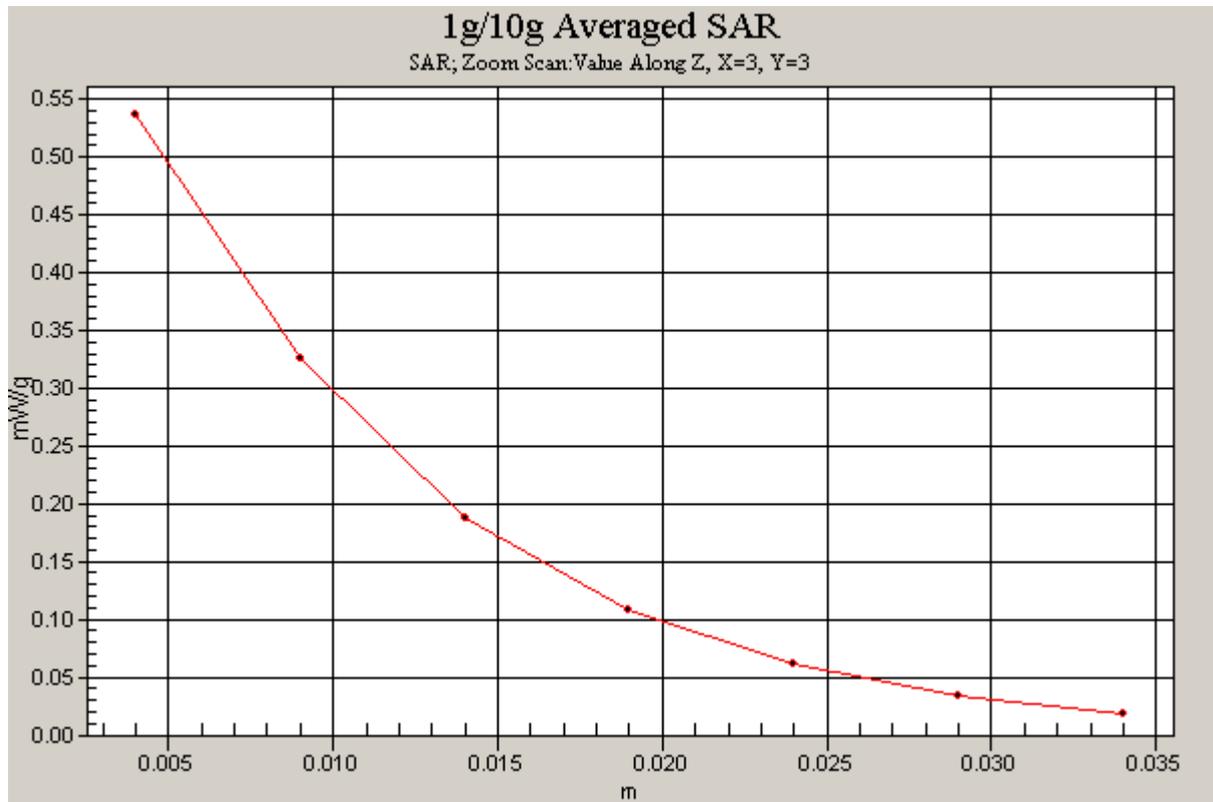


Figure 71 Z-Scan at power reference point (Right Hand Touch Cheek GSM 1900 Channel 810)

GSM 1900 Right Cheek Middle

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn679;

Cheek Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.622 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.4 V/m; Power Drift = -0.563 dB

Peak SAR (extrapolated) = 0.938 W/kg

SAR(1 g) = 0.566 mW/g; SAR(10 g) = 0.295 mW/g

Maximum value of SAR (measured) = 0.640 mW/g

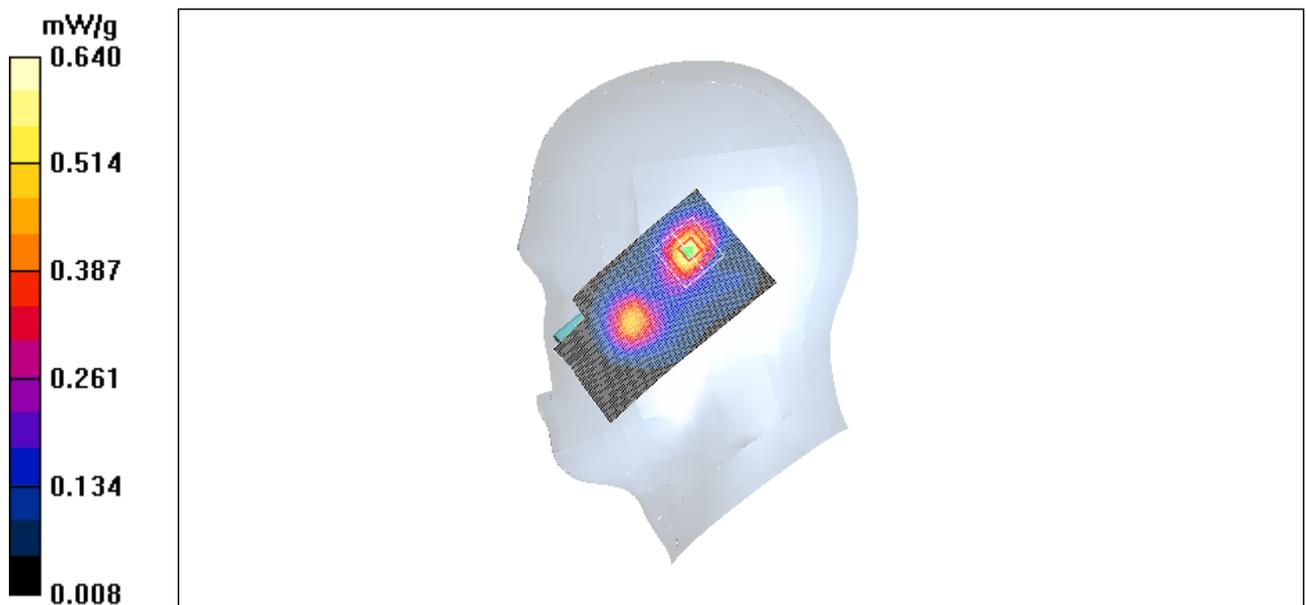


Figure 72 Right Hand Touch Cheek GSM 1900 Channel 661

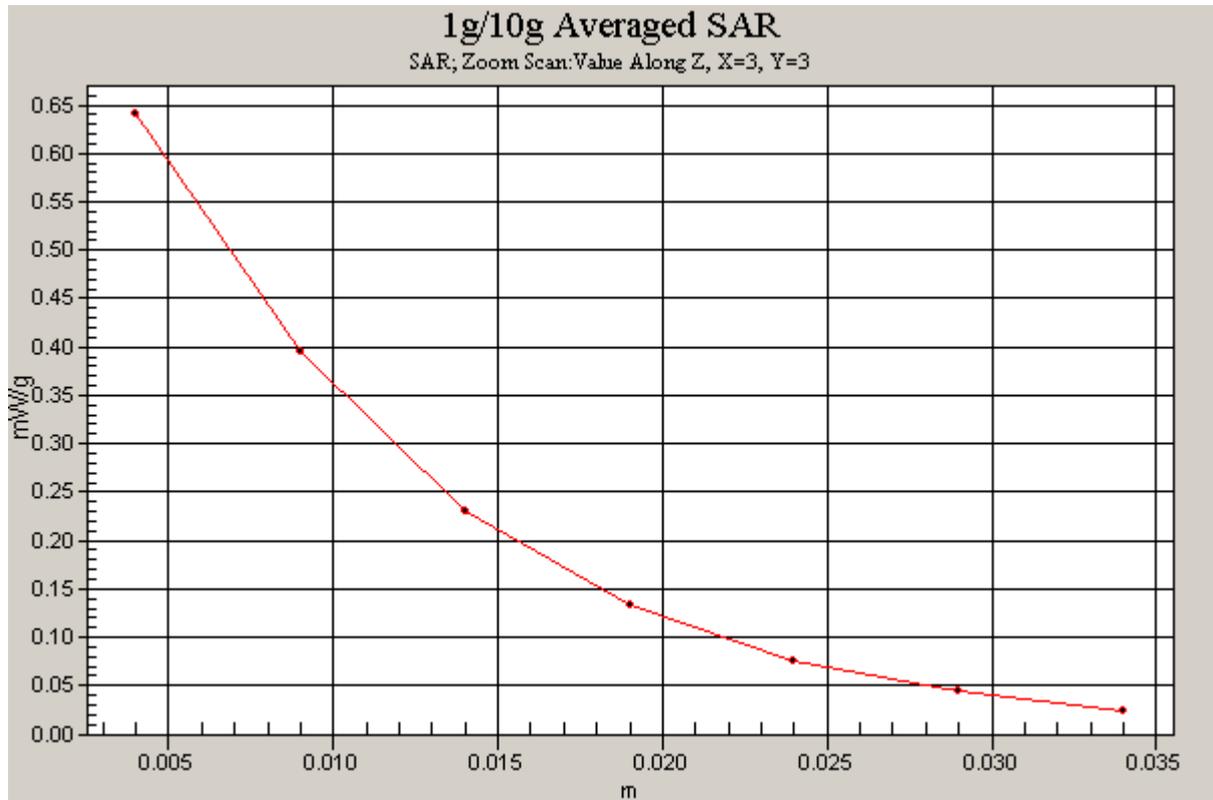


Figure 73 Z-Scan at power reference point (Right Hand Touch Cheek GSM 1900 Channel 661)

GSM 1900 Right Cheek Low

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn679;

Cheek Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.446 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 0.668 W/kg

SAR(1 g) = 0.405 mW/g; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.457 mW/g

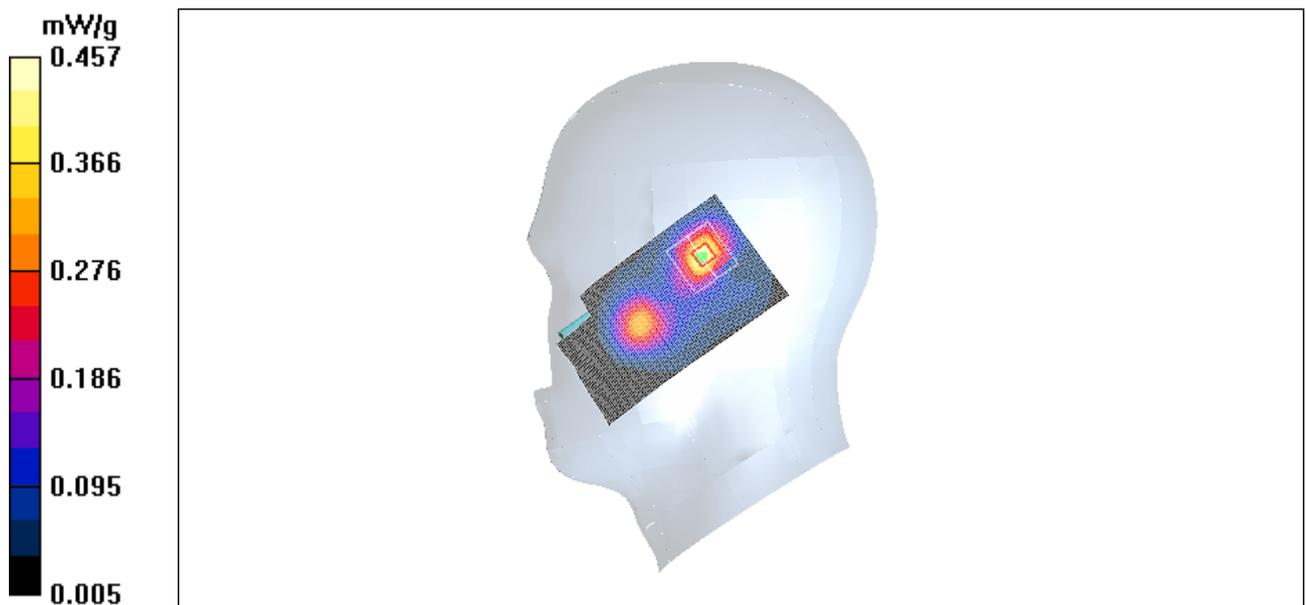


Figure 74 Right Hand Touch Cheek GSM 1900 Channel 512

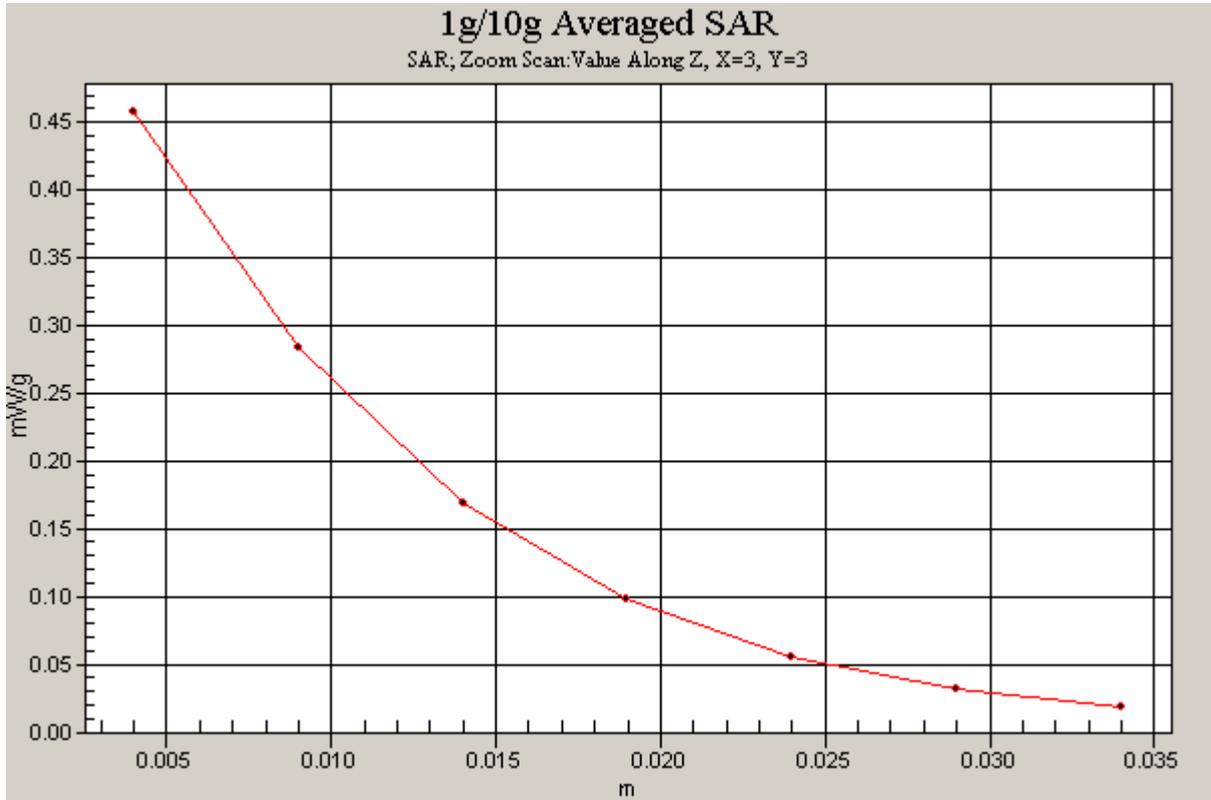


Figure 75 Z-Scan at power reference point (Right Hand Touch Cheek GSM 1900 Channel 512)

GSM 1900 Right Tilt High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn679;

Tilt High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.506 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.745 W/kg

SAR(1 g) = 0.448 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.507 mW/g

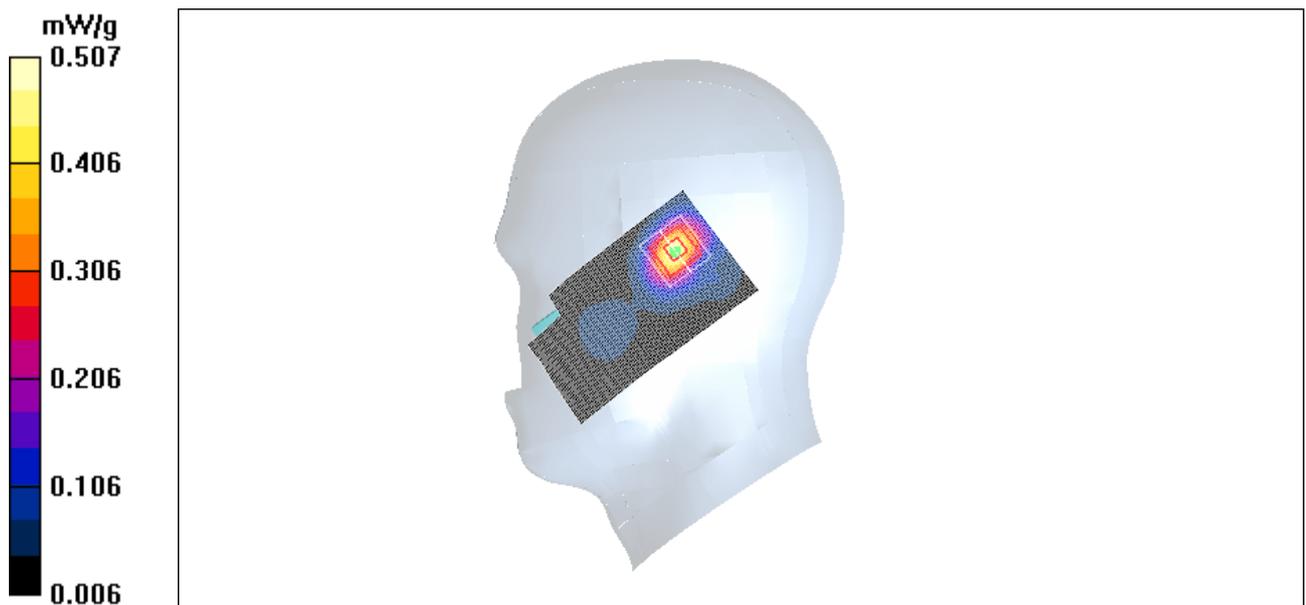


Figure 76 Right Hand Tilt 15 ° GSM 1900 Channel 810

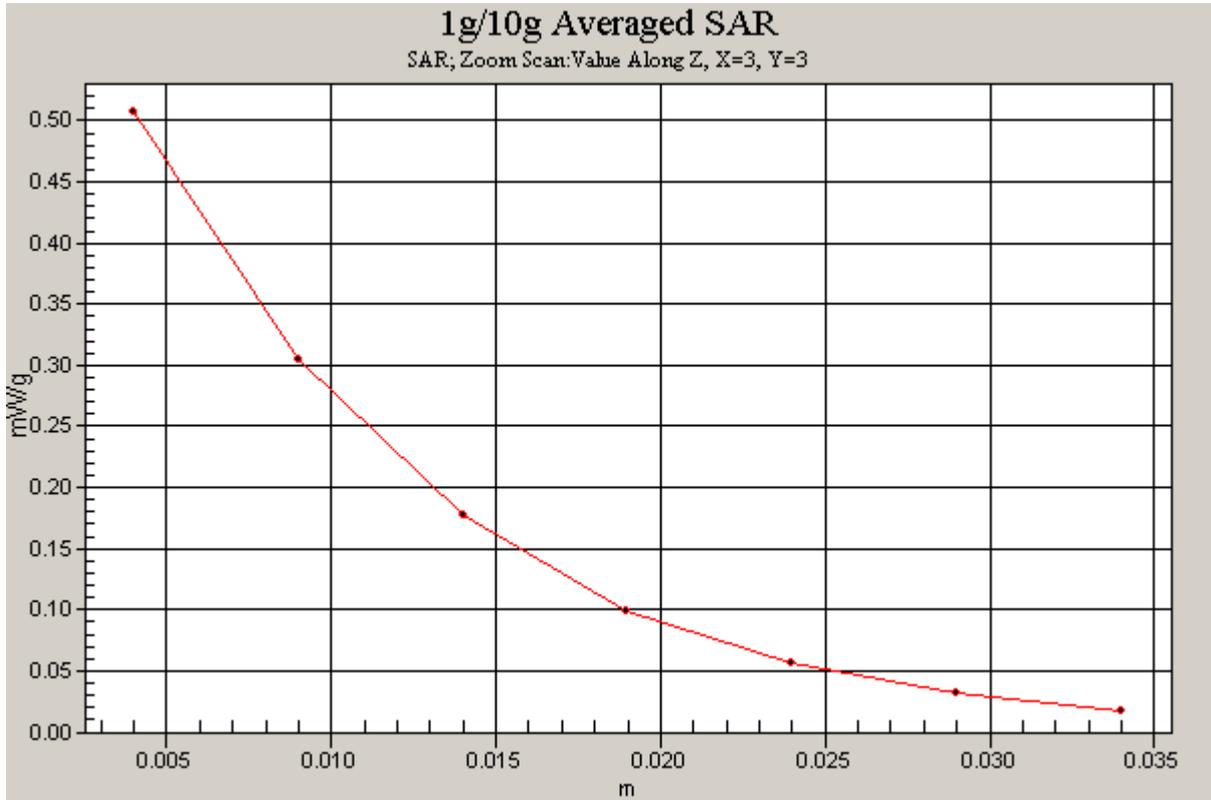


Figure 77 Z-Scan at power reference point (Right Hand Tilt 15 ° GSM 1900 Channel 810)

GSM 1900 Right Tilt Middle

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn679;

Tilt Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.633 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.920 W/kg

SAR(1 g) = 0.560 mW/g; SAR(10 g) = 0.294 mW/g

Maximum value of SAR (measured) = 0.633 mW/g

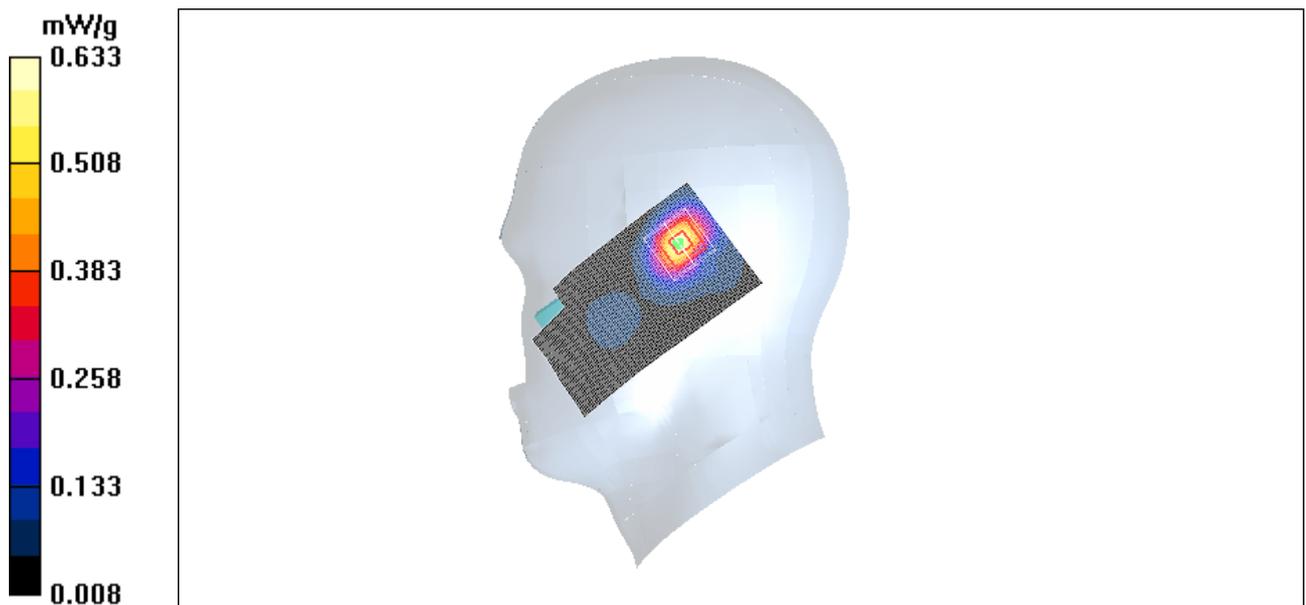


Figure 78 Right Hand Tilt 15 ° GSM 1900 Channel 661

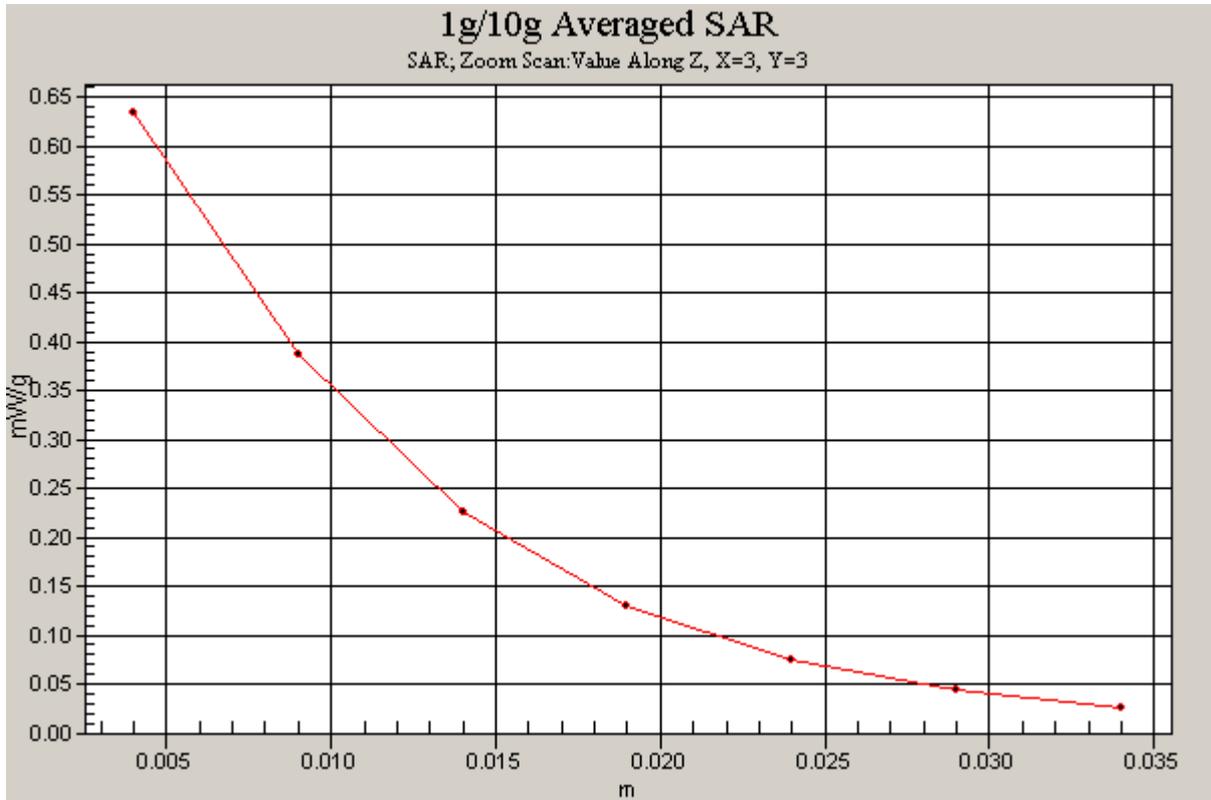


Figure 79 Z-Scan at power reference point (Right Hand Tilt 15 ° GSM 1900 Channel 661)

GSM 1900 Right Tilt Low

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn679;

Tilt Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.481 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 0.697 W/kg

SAR(1 g) = 0.428 mW/g; SAR(10 g) = 0.226 mW/g

Maximum value of SAR (measured) = 0.484 mW/g

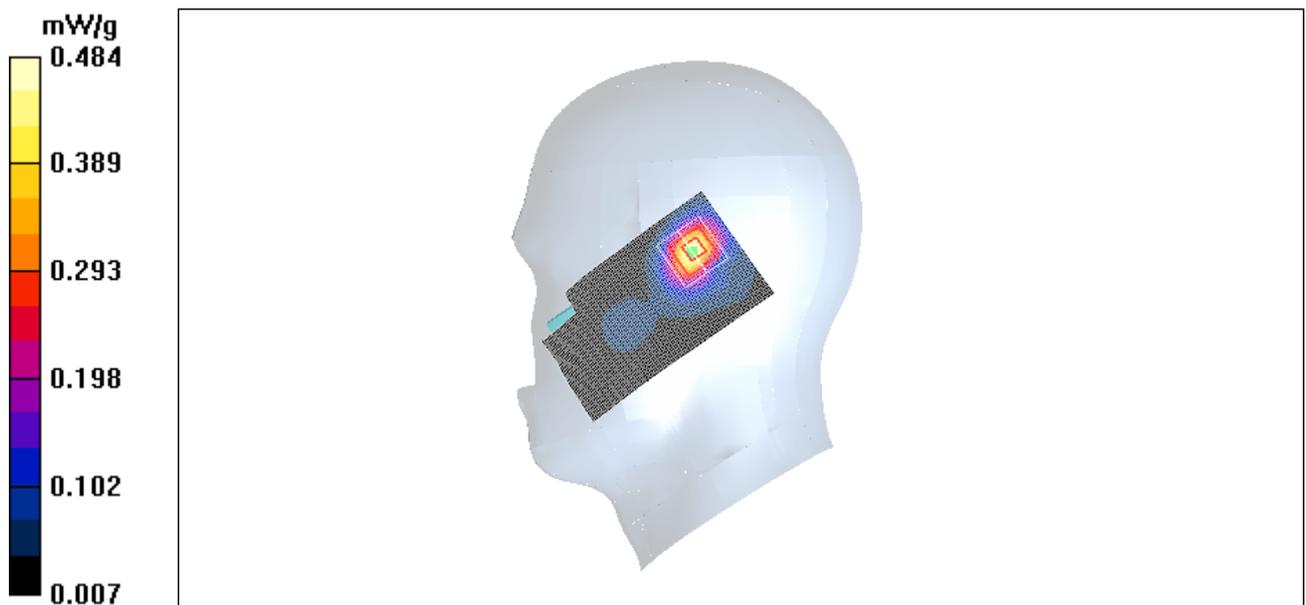


Figure 80 Right Hand Tilt 15 ° GSM 1900 Channel 512

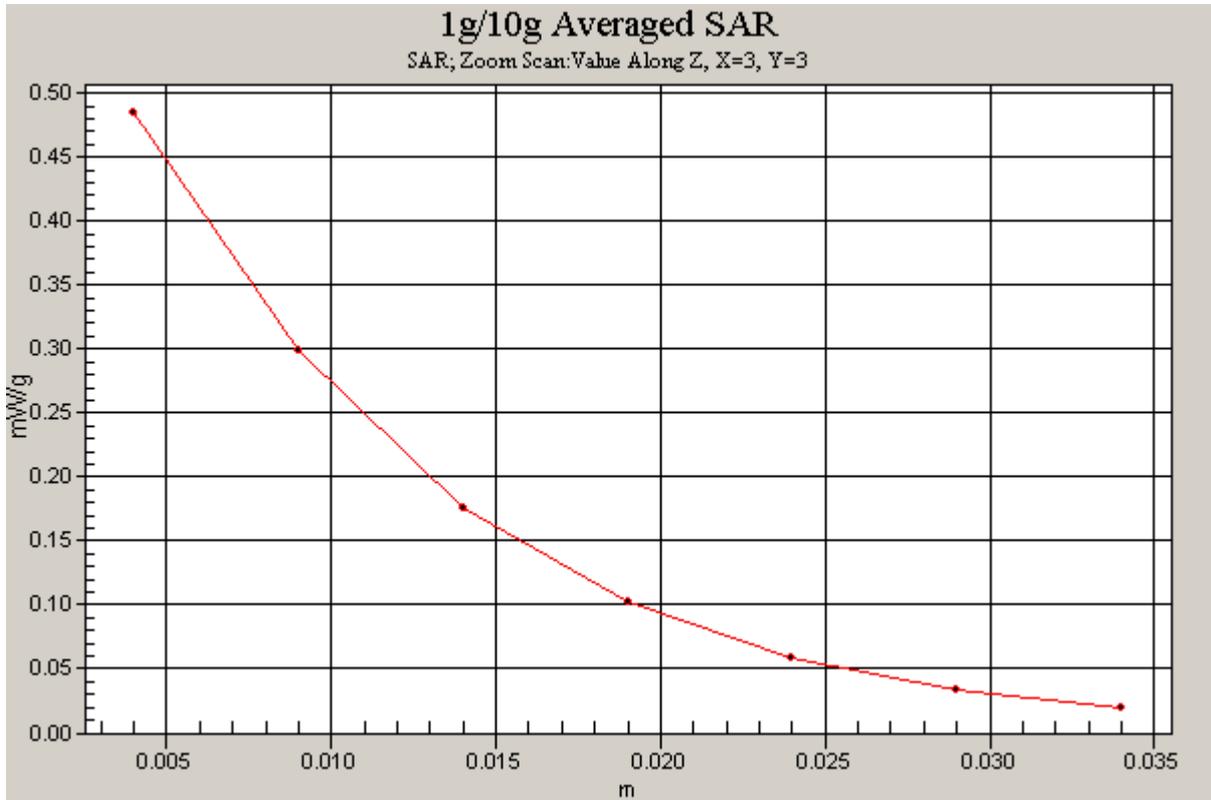


Figure 81 Z-Scan at power reference point (Right Hand Tilt 15 ° GSM 1900 Channel 512)

GSM 1900 Towards Ground High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn679;

Towards Ground High/Area Scan (71x131x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.349 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 0.479 W/kg

SAR(1 g) = 0.322 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 0.349 mW/g

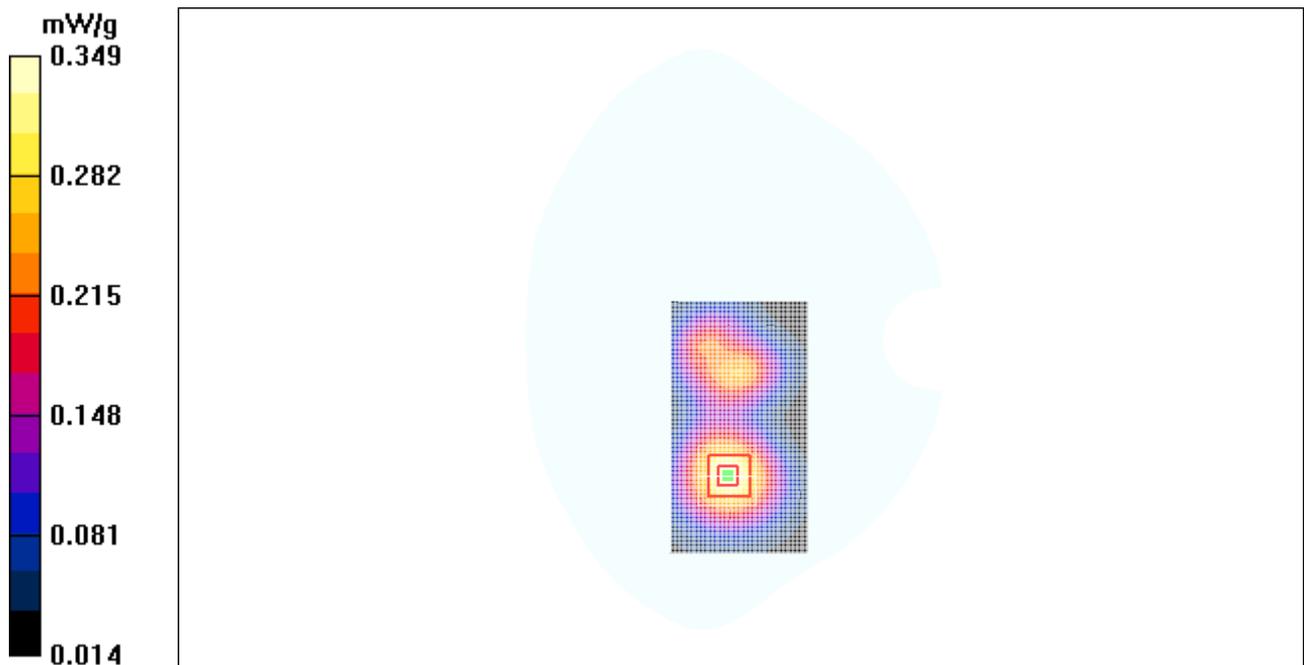


Figure 82 Body, Towards Ground, GSM 1900 Channel 810

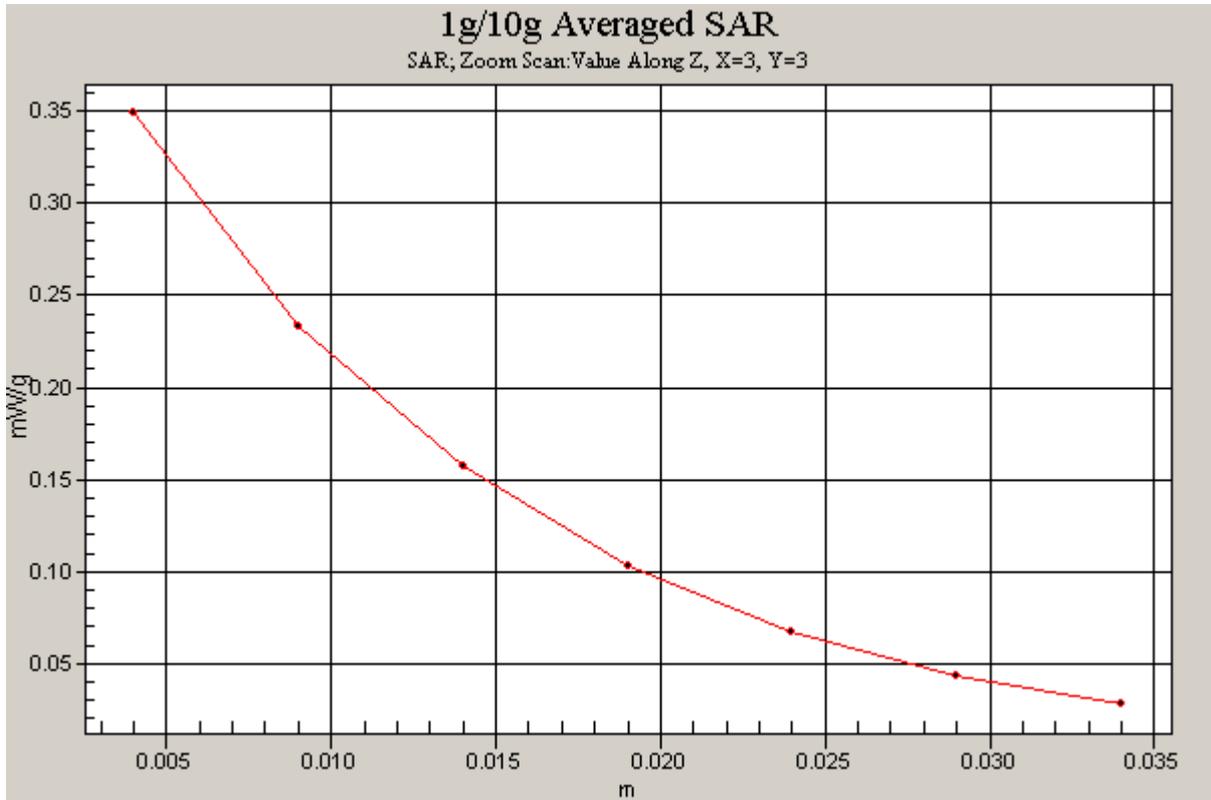


Figure 83 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 Channel 810)

GSM 1900 Towards Ground Middle

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn679;

Towards Ground Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.393 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.516 W/kg

SAR(1 g) = 0.356 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.386 mW/g

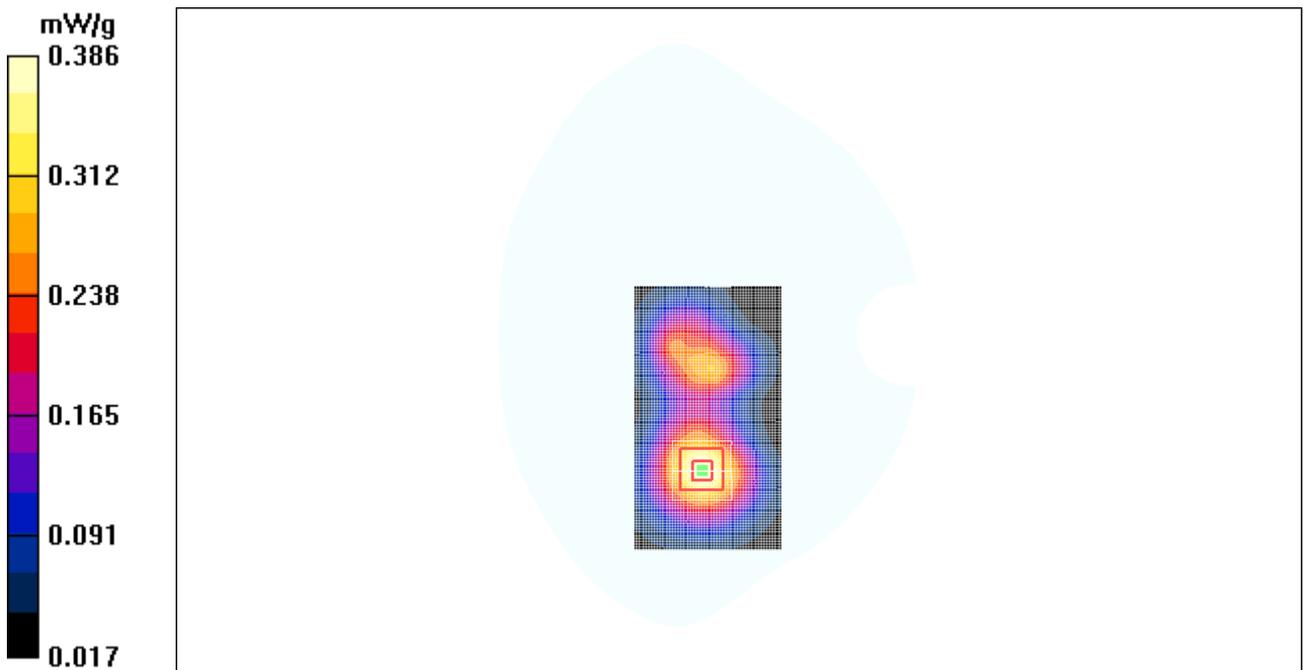


Figure 84 Body, Towards Ground, GSM 1900 Channel 661

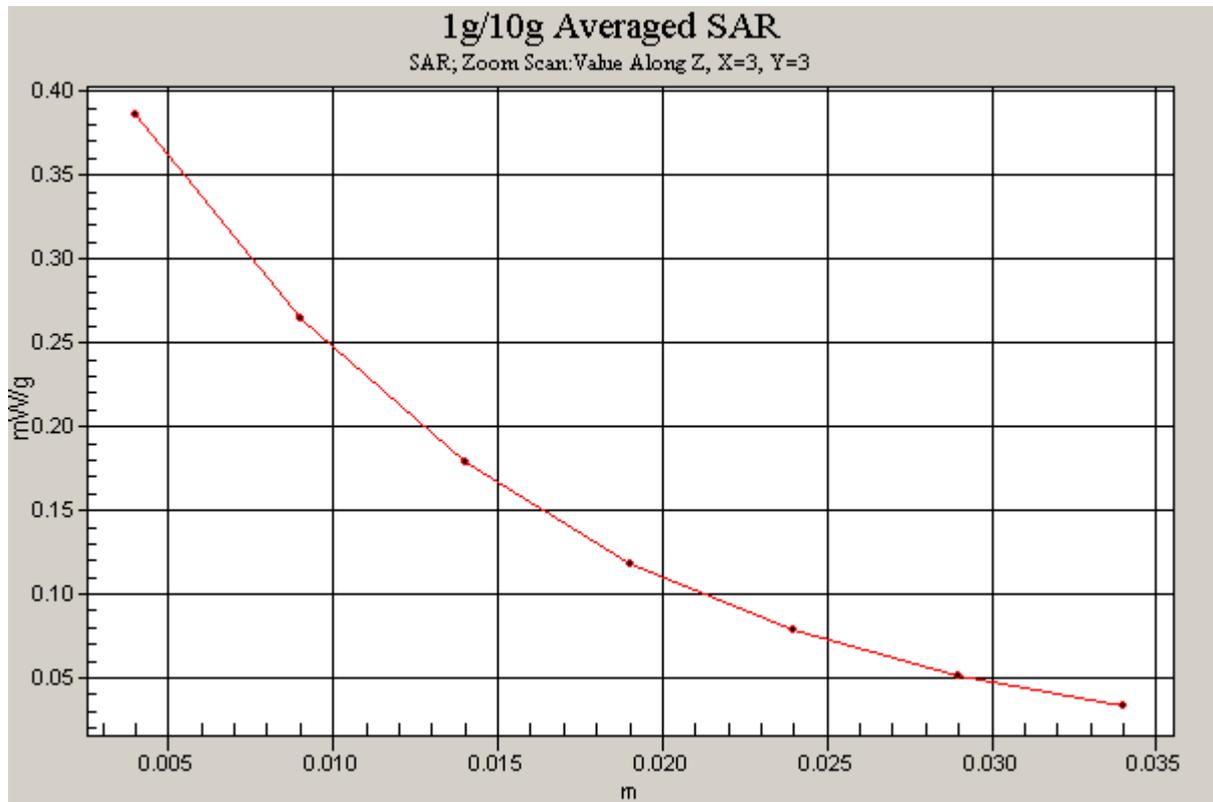


Figure 85 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 Channel 661)

GSM 1900 Towards Ground Low

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn679;

Towards Ground Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.322 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.411 W/kg

SAR(1 g) = 0.291 mW/g; SAR(10 g) = 0.189 mW/g

Maximum value of SAR (measured) = 0.314 mW/g

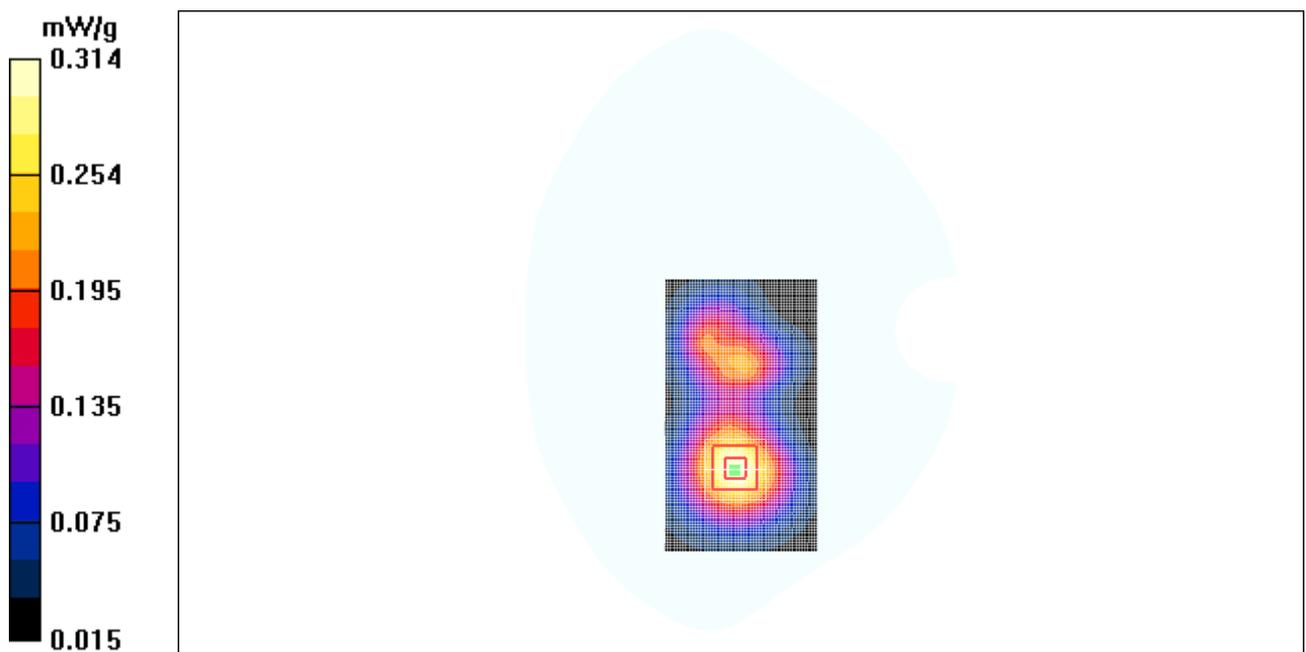


Figure 86 Body, Towards Ground, GSM 1900 Channel 512

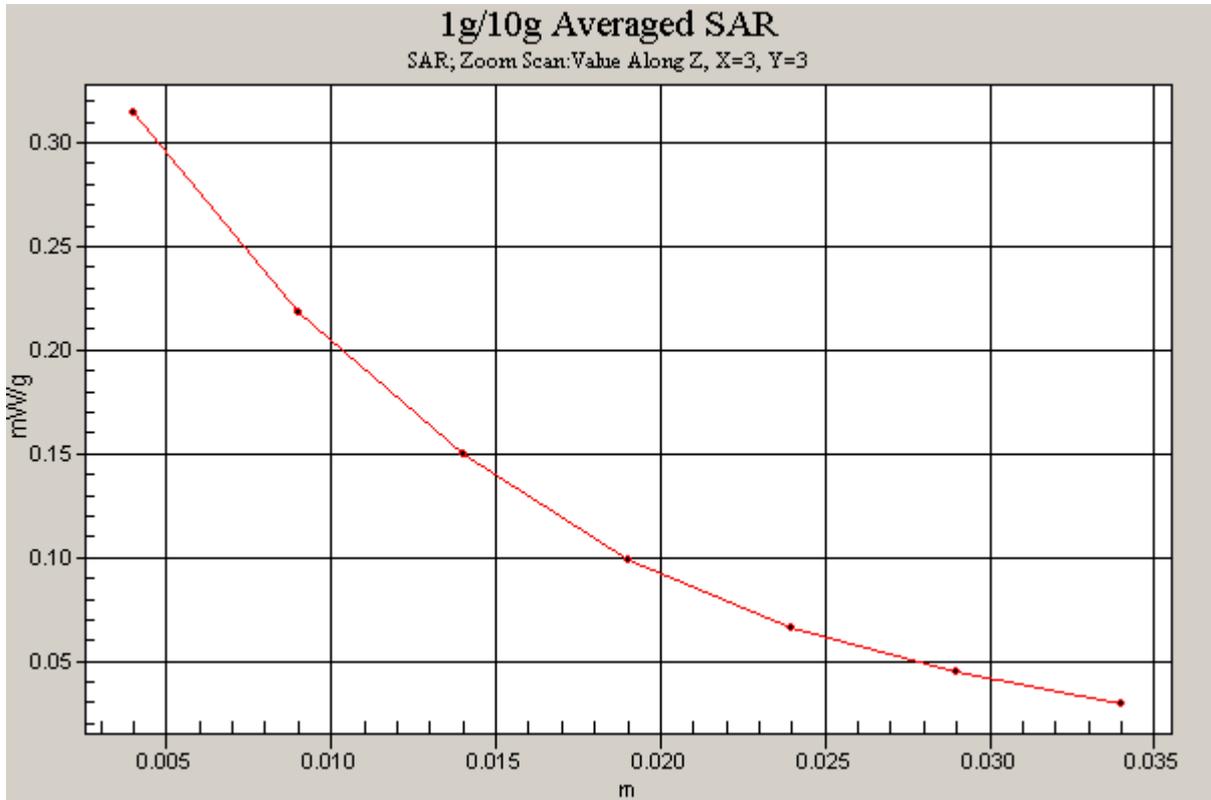


Figure 87 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 Channel 512)

GSM 1900 Towards Phantom High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn679;

Towards Phantom High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.101 mW/g

Towards Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.51 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.099 mW/g

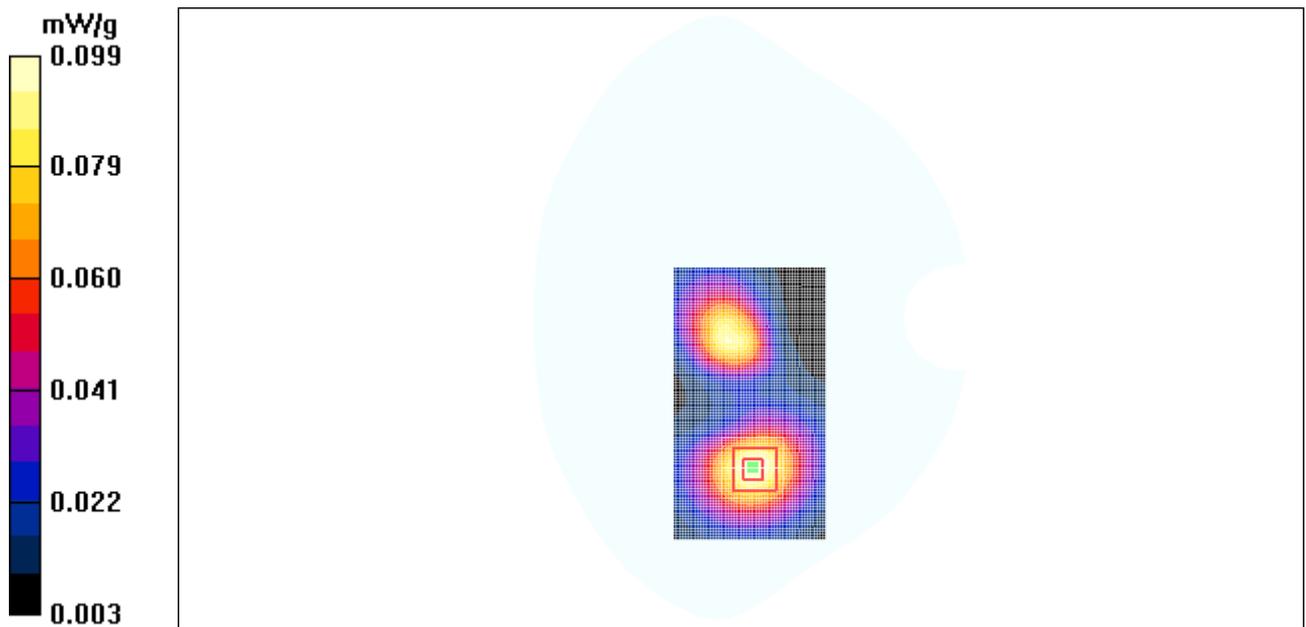


Figure 88 Body, Towards Phantom, GSM 1900 Channel 810

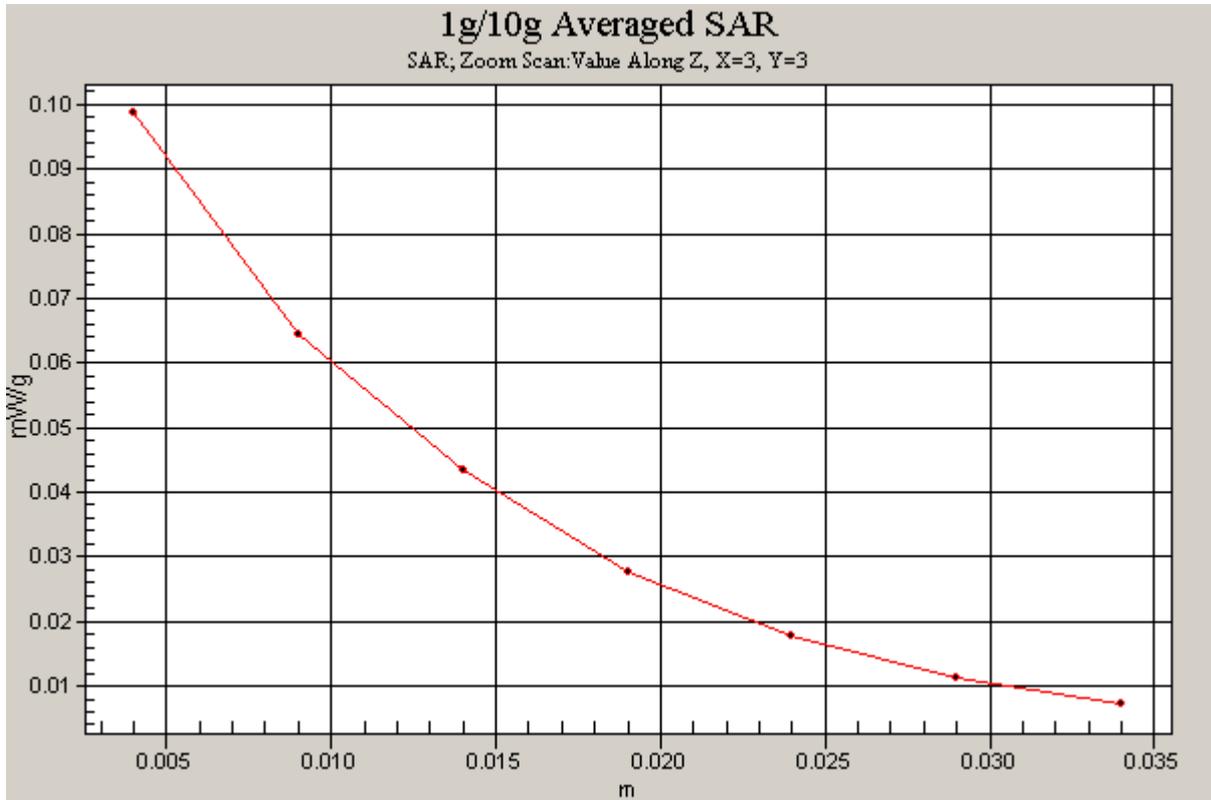


Figure 89 Z-Scan at power reference point (Body, Towards Phantom, GSM 1900 Channel 810)

GSM 1900 Towards Phantom Middle

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64); Electronics: DAE4 Sn679;

Towards Phantom Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.123 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.29 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.111 mW/g; SAR(10 g) = 0.070 mW/g

Maximum value of SAR (measured) = 0.120 mW/g

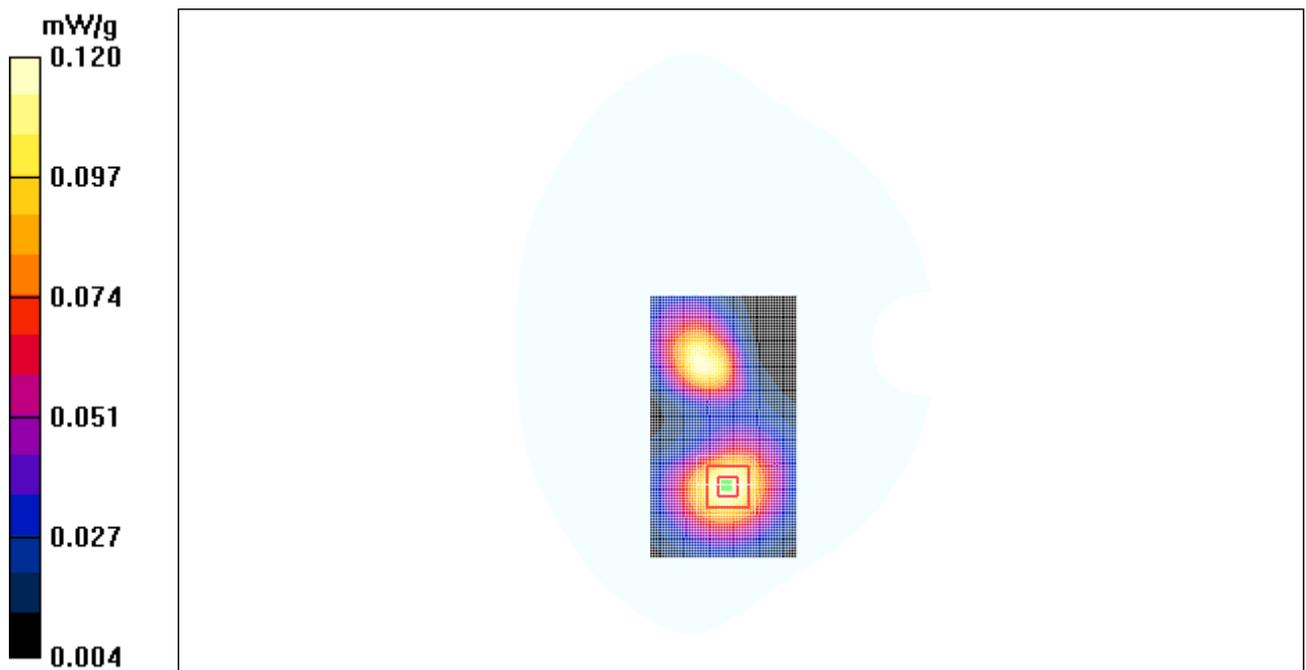


Figure 90 Body, Towards Phantom, GSM 1900 Channel 661

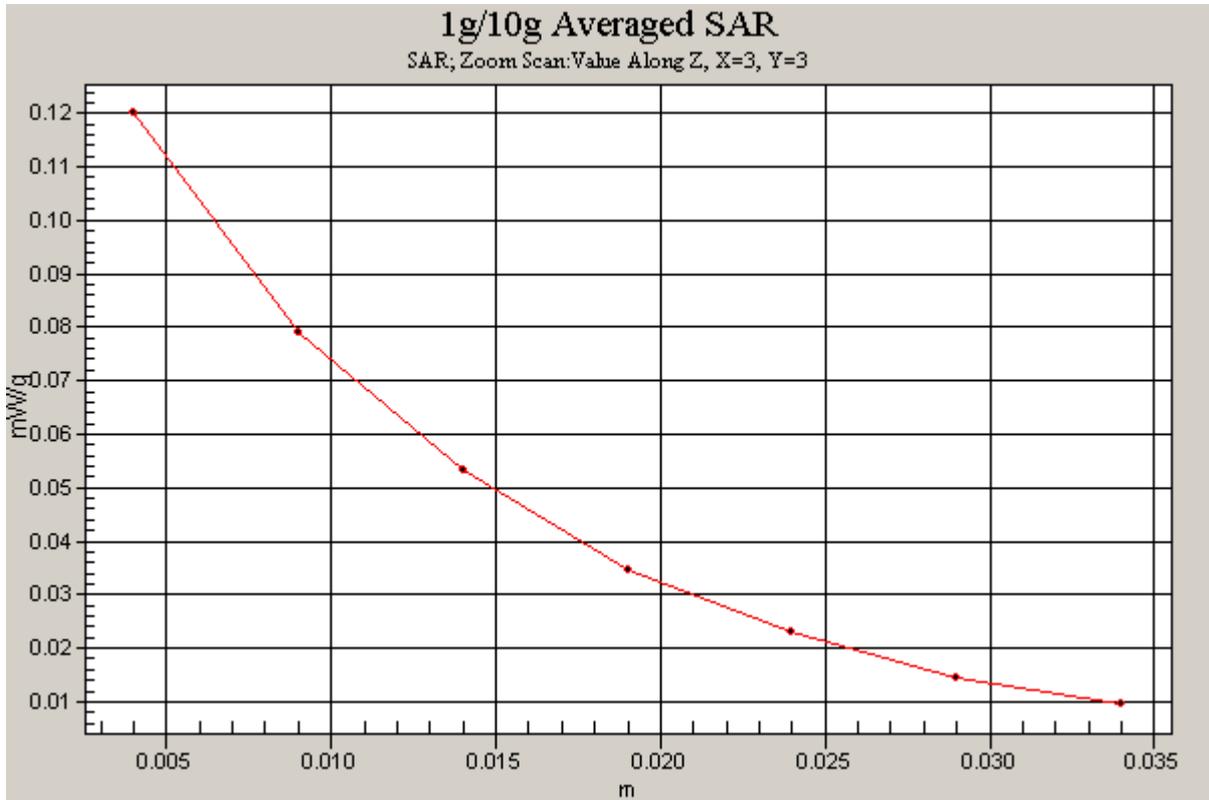


Figure 91 Z-Scan at power reference point (Body, Towards Phantom, GSM 1900 Channel 661)

GSM 1900 Towards Phantom Low

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn679;

Towards Phantom Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.098 mW/g

Towards Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.41 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.056 mW/g

Maximum value of SAR (measured) = 0.096 mW/g

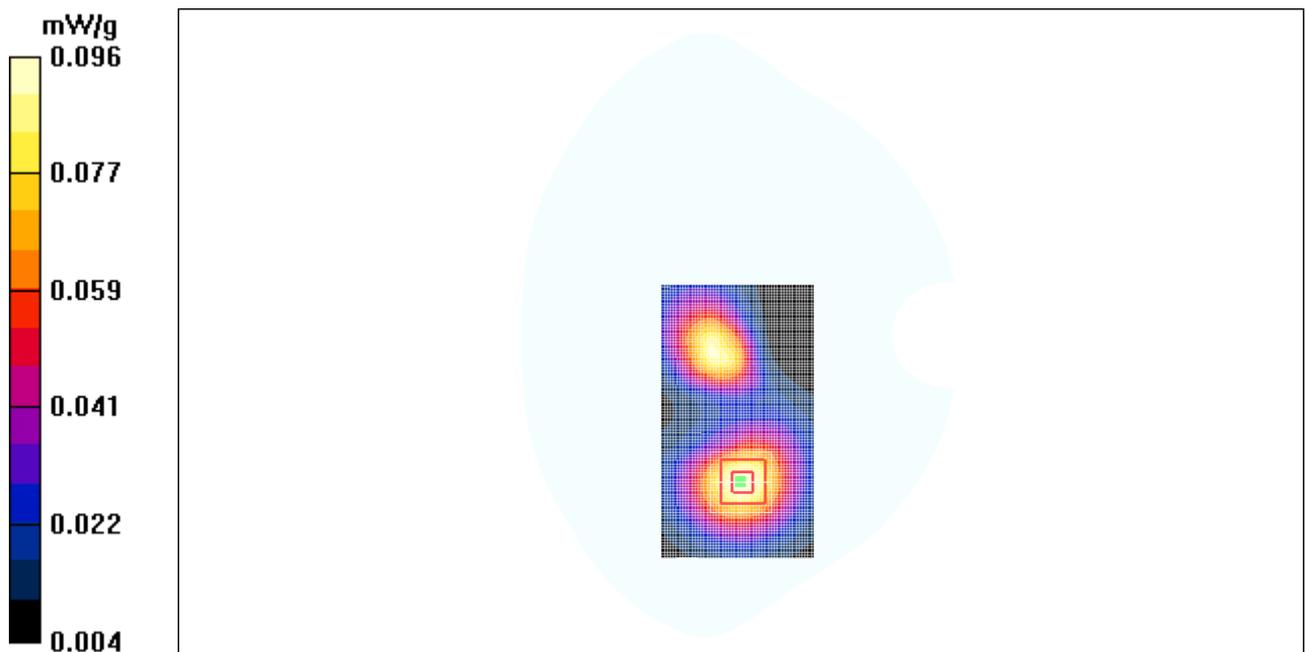


Figure 92 Body, Towards Phantom, GSM 1900 Channel 512

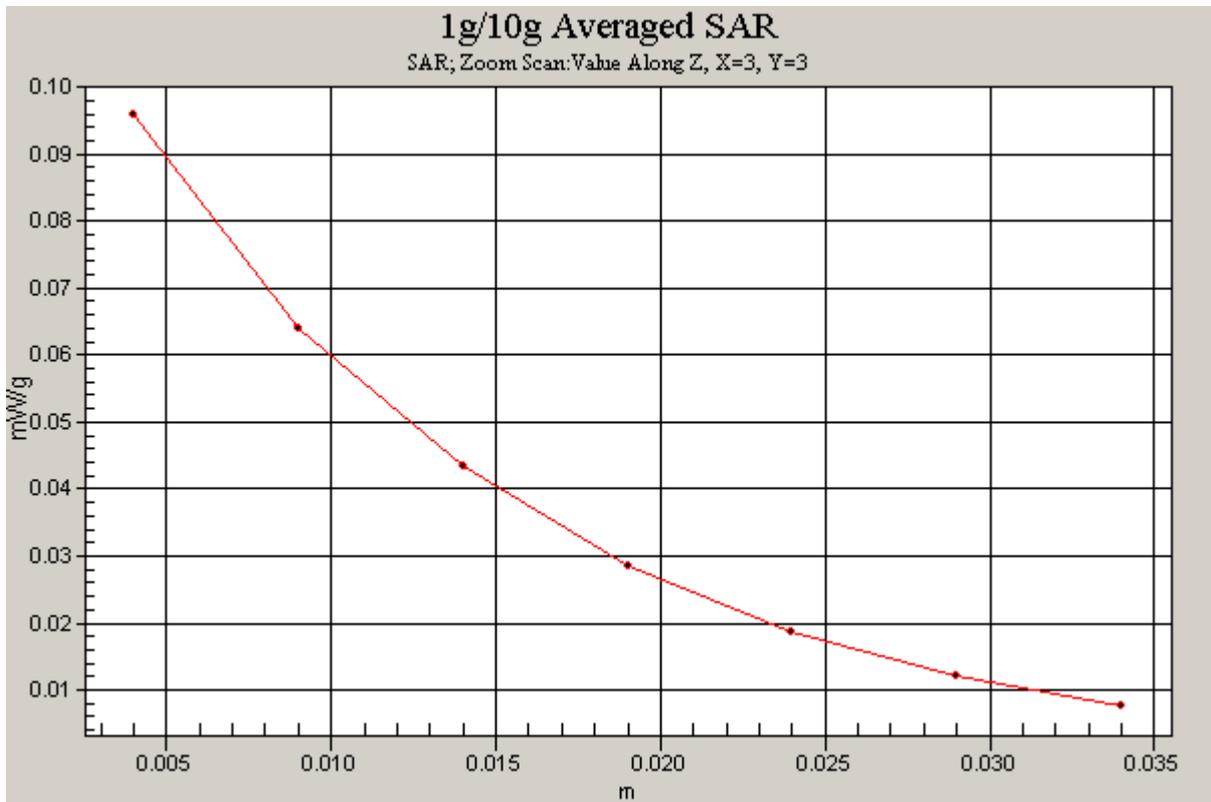


Figure 93 Z-Scan at power reference point (Body, Towards Phantom, GSM 1900 Channel 512)

GSM 1900 Earphone Towards Ground Middle

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn679;

Towards Ground Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.200 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.117 mW/g

Maximum value of SAR (measured) = 0.196 mW/g

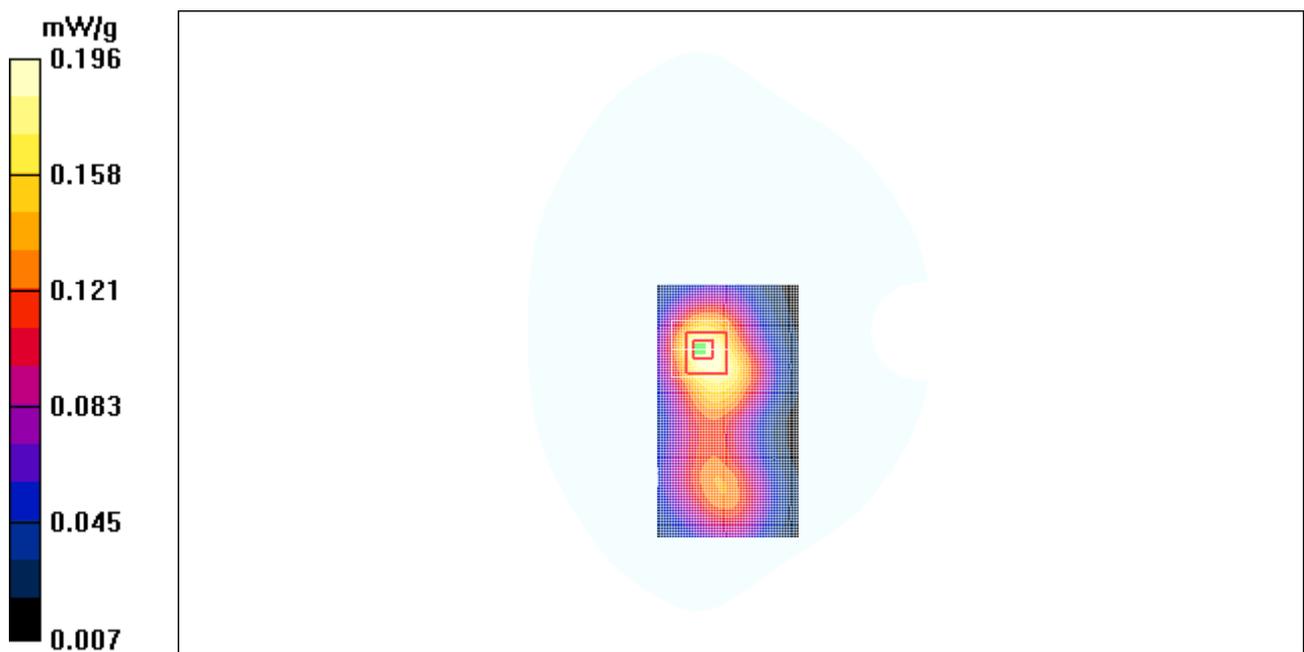


Figure 94 Body with Earphone, Towards Ground, GSM 1900, Channel 661

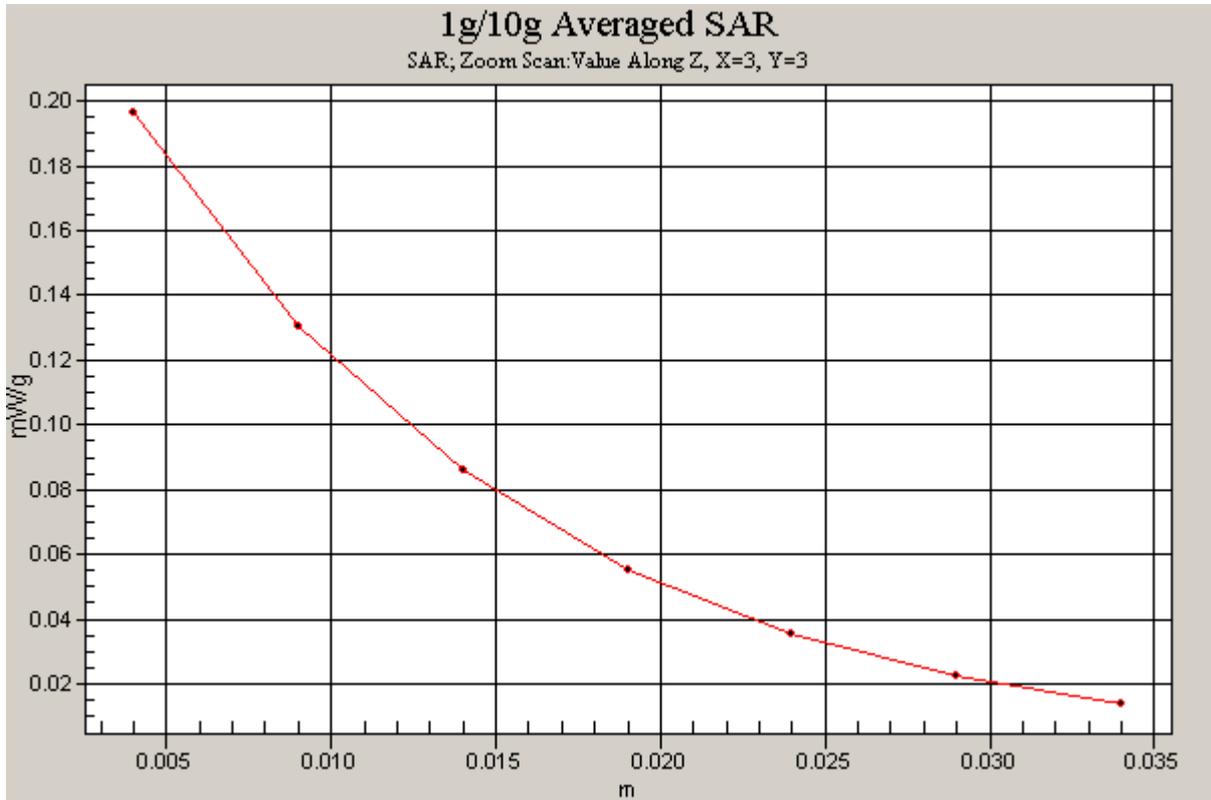


Figure 95 Z-Scan at power reference point (Body with Earphone, Towards Ground, GSM 1900, Channel 661)

GSM 1900 GPRS Towards Ground High

Communication System: GSM 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn679;

Towards Ground High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.448 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.617 W/kg

SAR(1 g) = 0.417 mW/g; SAR(10 g) = 0.267 mW/g

Maximum value of SAR (measured) = 0.449 mW/g

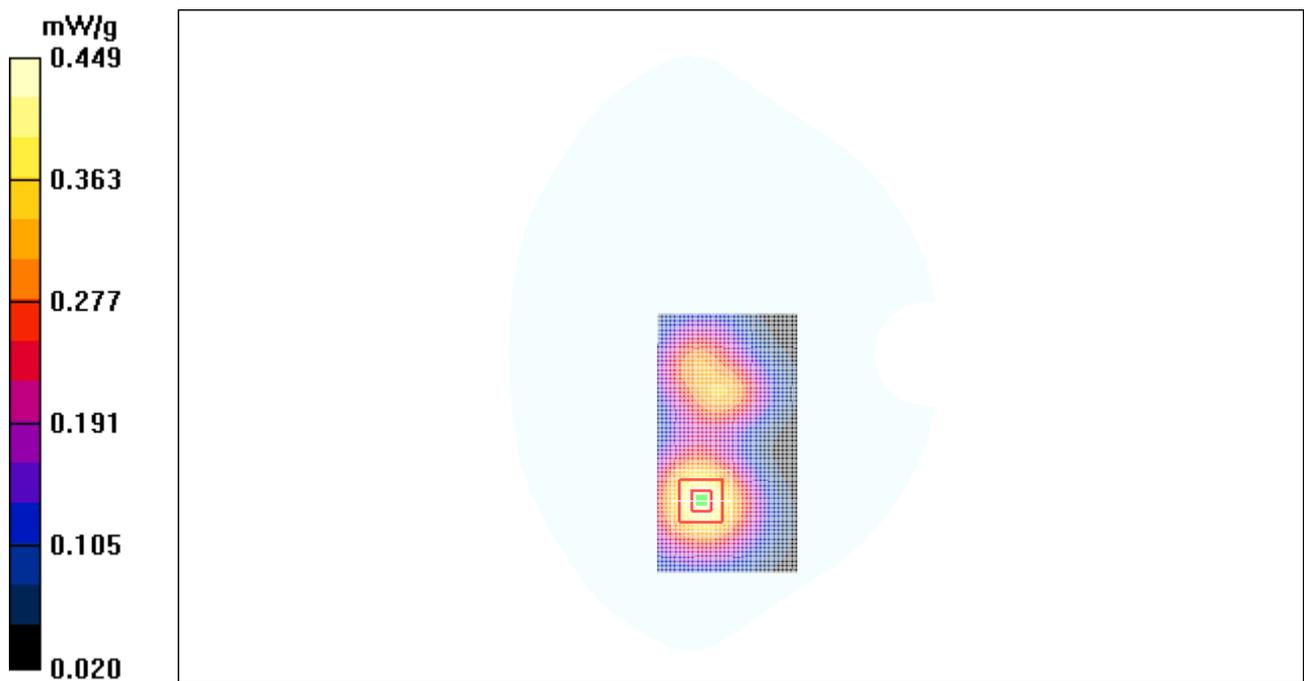


Figure 96 Body, Towards Ground, GSM 1900 GPRS, Channel 810

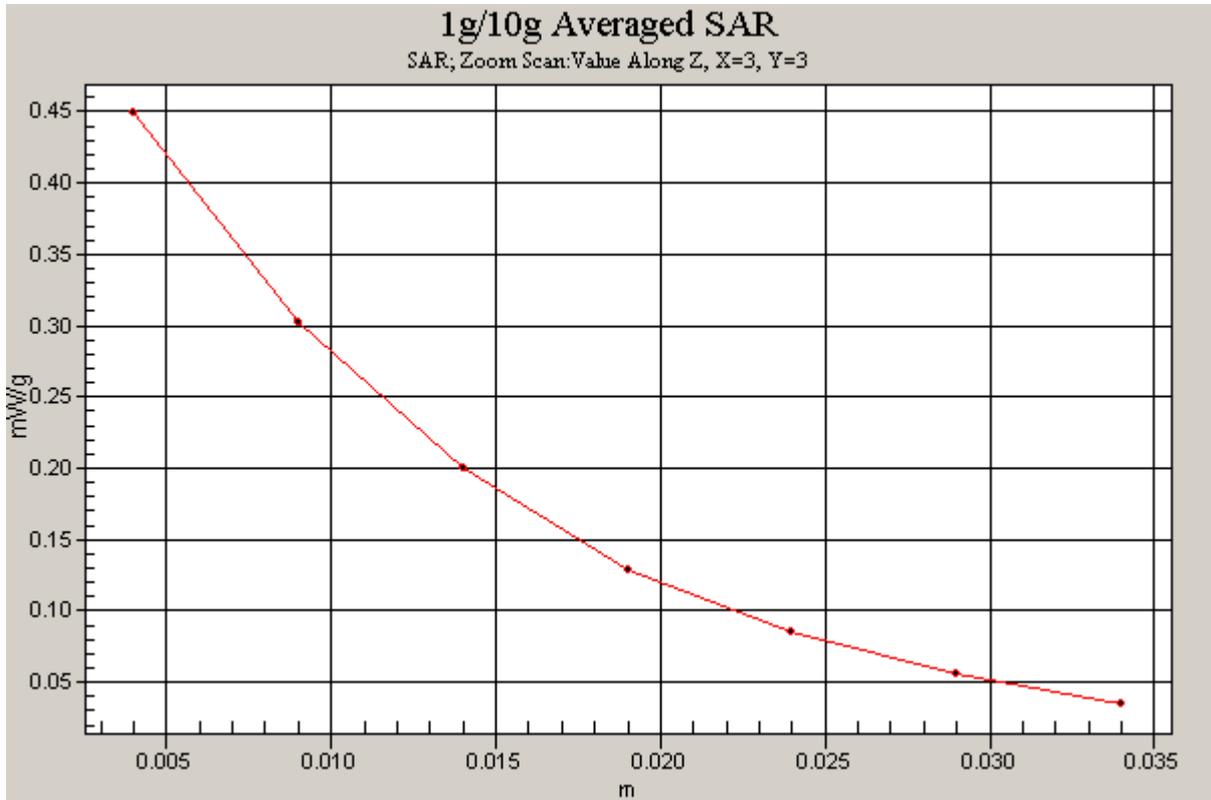


Figure 97 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 GPRS, Channel 810)

GSM 1900 GPRS Towards Ground Middle

Communication System: GSM 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn679;

Towards Ground Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.515 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.691 W/kg

SAR(1 g) = 0.470 mW/g; SAR(10 g) = 0.304 mW/g

Maximum value of SAR (measured) = 0.508 mW/g

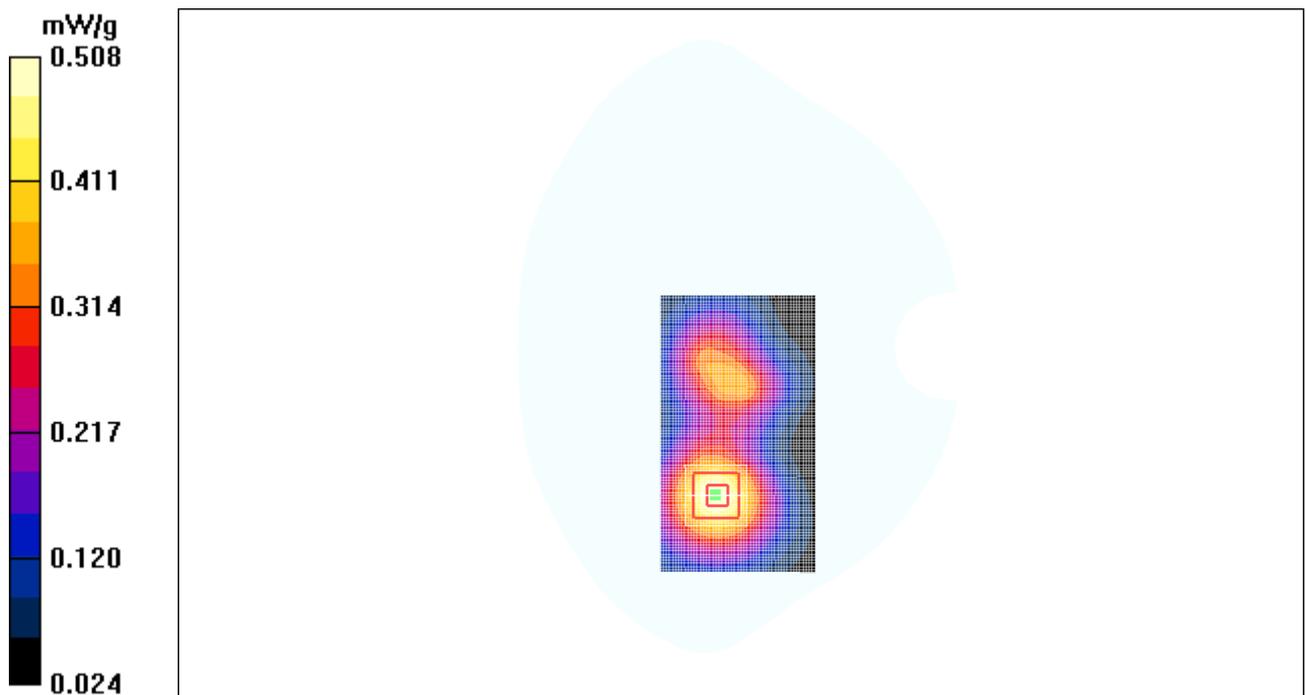


Figure 98 Body, Towards Ground, GSM 1900 GPRS Channel 661

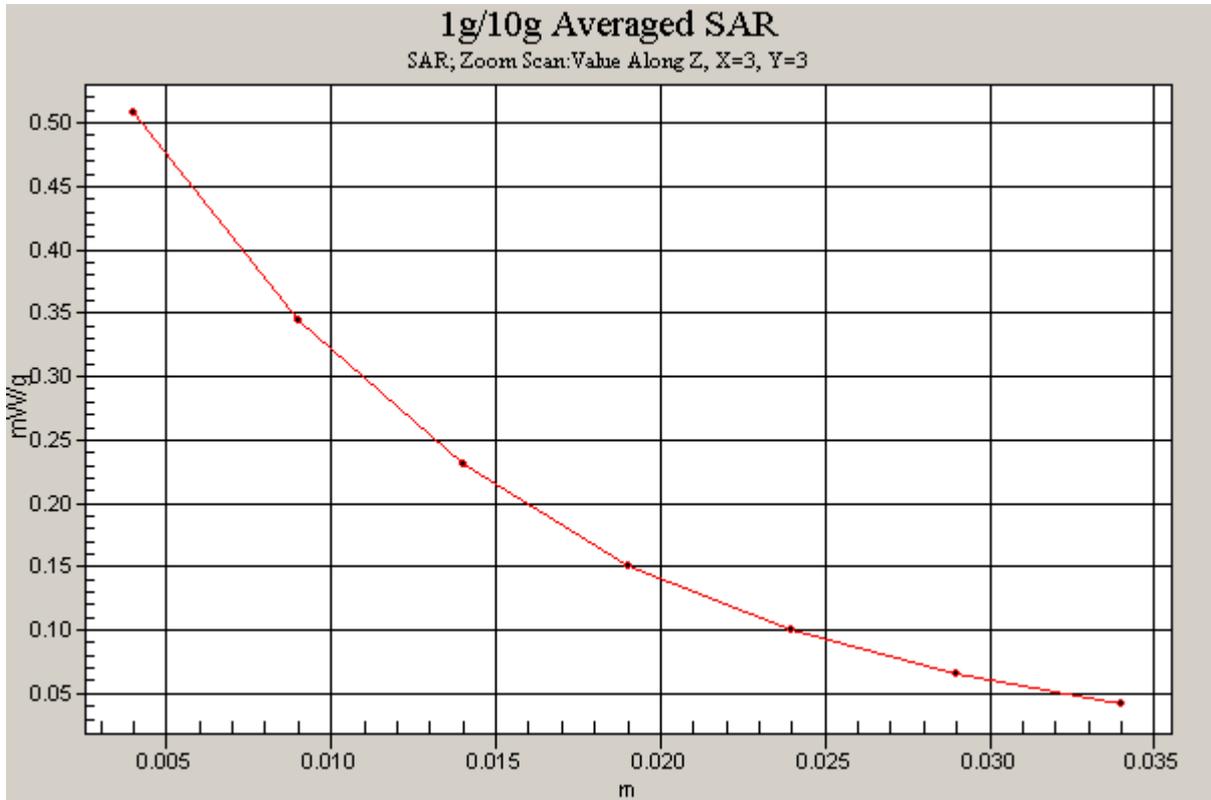


Figure 99 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 GPRS Channel 661)

GSM 1900 GPRS Towards Ground Low

Communication System: GSM 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn679;

Towards Ground Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.386 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.506 W/kg

SAR(1 g) = 0.356 mW/g; SAR(10 g) = 0.232 mW/g

Maximum value of SAR (measured) = 0.380 mW/g

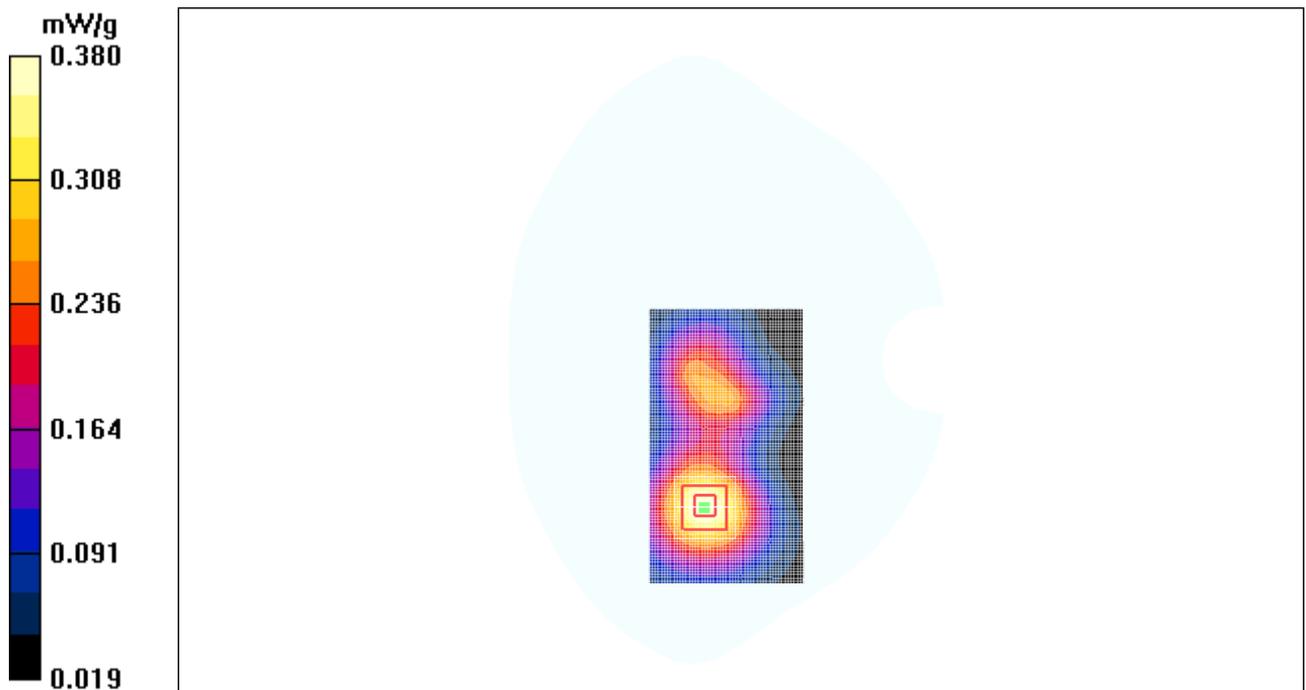


Figure 100 Body, Towards Ground, GSM 1900 GPRS Channel 512

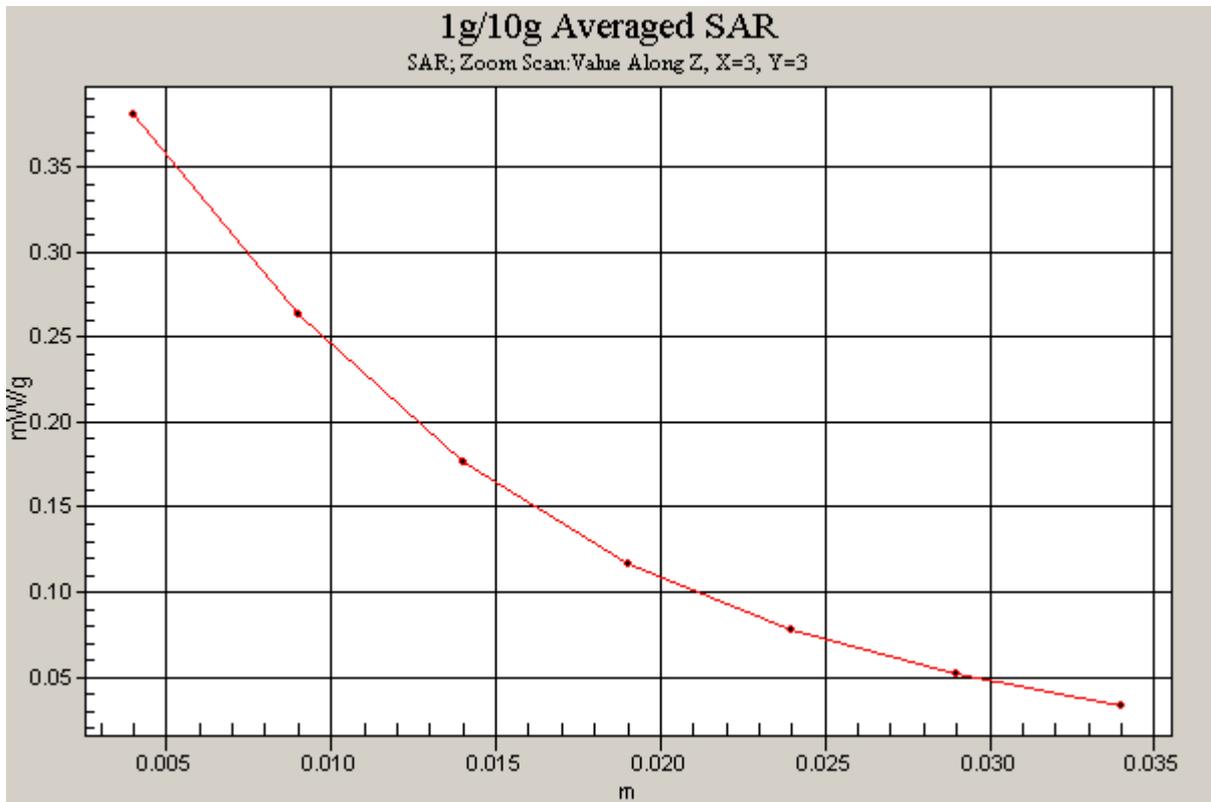


Figure 101 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 GPRS Channel 512)

GSM 1900 GPRS Towards Phantom High

Communication System: GSM 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn679;

Towards Phantom High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.178 mW/g

Towards Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.71 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 0.253 W/kg

SAR(1 g) = 0.162 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.176 mW/g

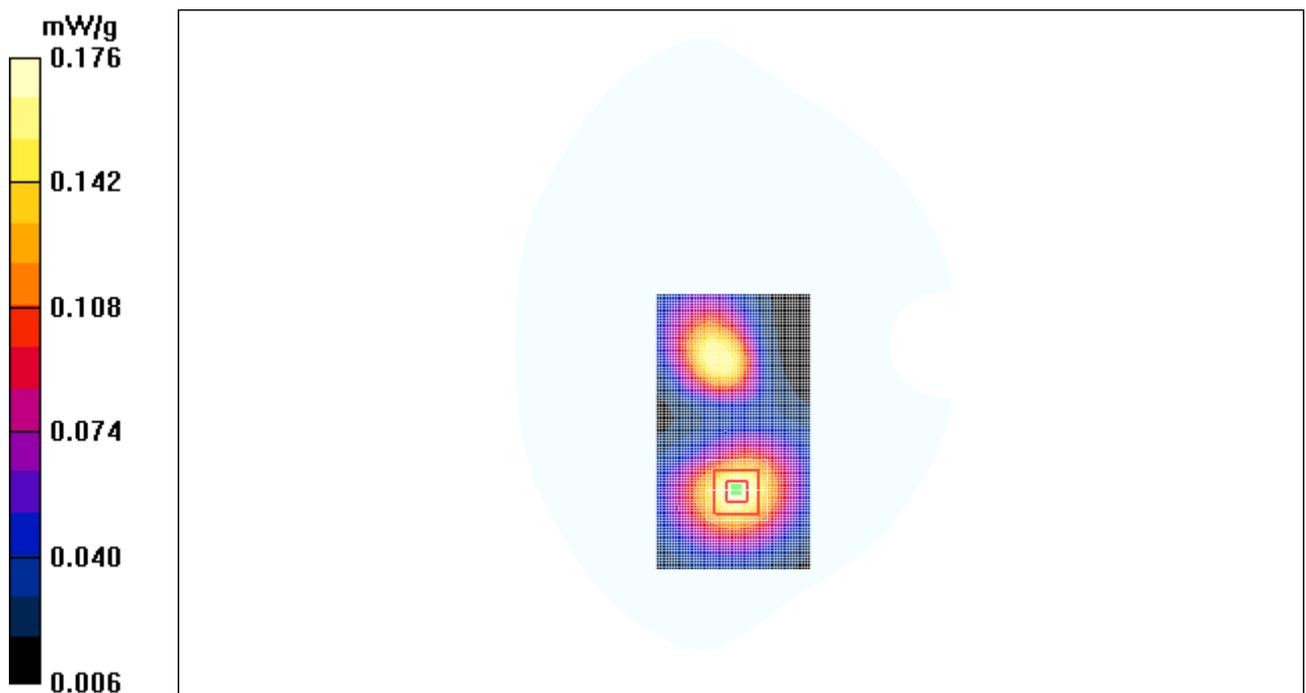


Figure 102 Body, Towards Phantom, GSM 1900 GPRS, Channel 810

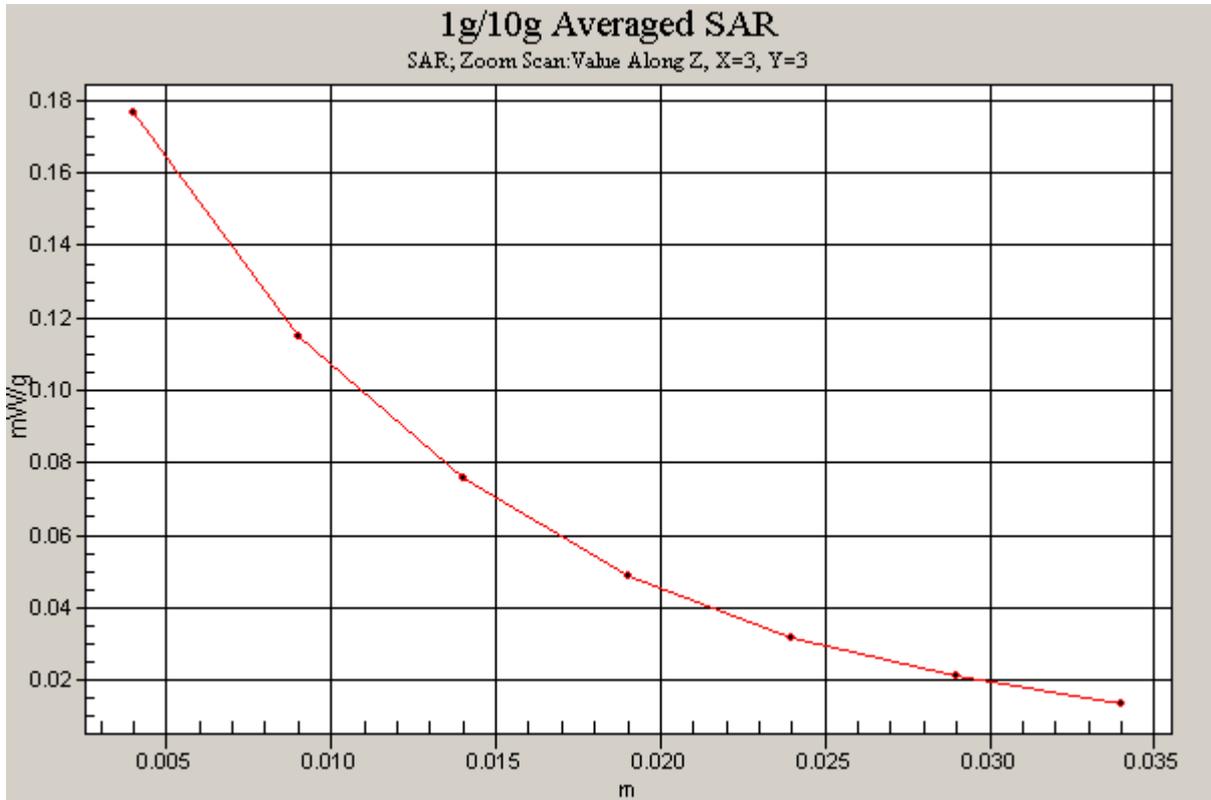


Figure 103 Z-Scan at power reference point (Body, Towards Phantom, GSM 1900 GPRS, Channel 810)

GSM 1900 GPRS Towards Phantom Middle

Communication System: GSM 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn679;

Towards Phantom Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.216 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.197 mW/g; SAR(10 g) = 0.125 mW/g

Maximum value of SAR (measured) = 0.212 mW/g

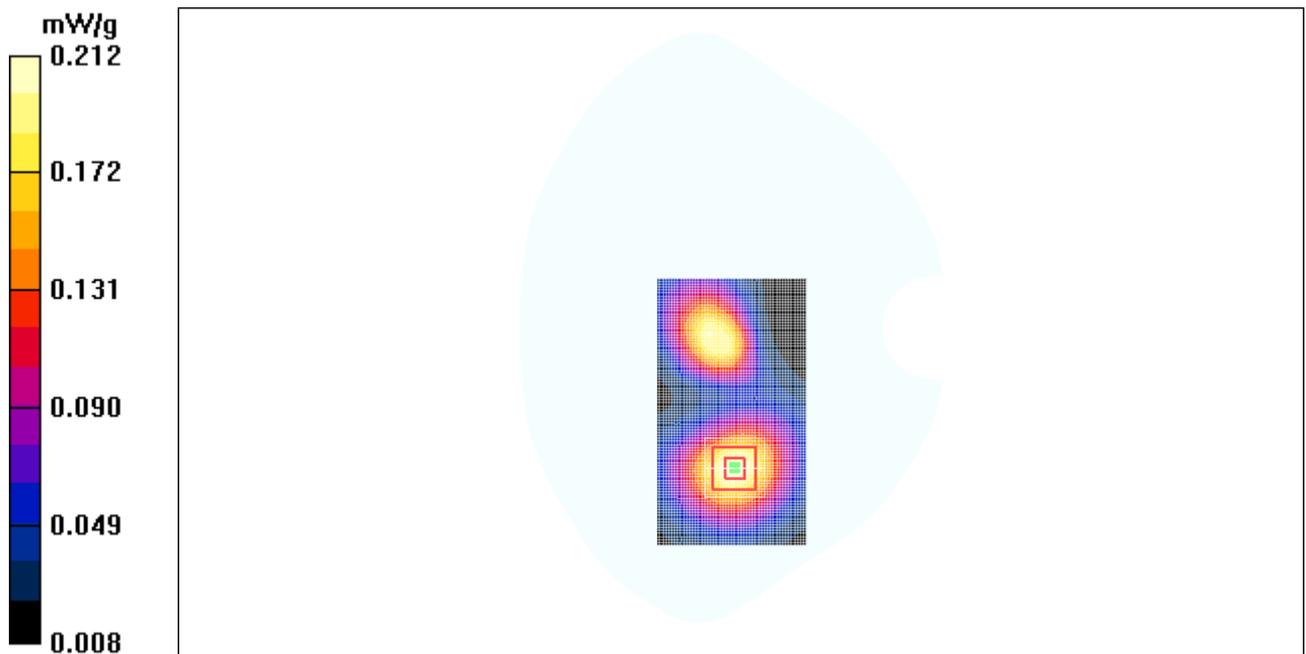


Figure 104 Body, Towards Phantom, GSM 1900 GPRS Channel 661