



No.: RZA2008-1482FCC



# OET 65

# TEST REPORT

<b>Test name</b>	Electromagnetic Field (Specific Absorption Rate)
<b>Product</b>	GSM Mobile Phone
<b>Model</b>	HUAWEI T566
<b>FCC ID</b>	QIST566
<b>Client</b>	Huawei Technologies Co., Ltd.

**TA Technology (Shanghai) Co., Ltd.**



## **GENERAL TERMS**

1. The test report is invalid if not marked with “exclusive stamp for the data report” or the stamp of the TA.
2. Any copy of the test report is invalid if not re-marked with the “exclusive stamp for the test report” or the stamp of TA.
3. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
4. The test report is invalid if there is any evidence of erasure and/or falsification.
5. If there is any dissidence for the test report, please file objection to the test center within 15 days from the date of receiving the test report.
6. Normally, entrust test is only responsible for the samples that have undergone the test.
7. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permissions of TA.

**Address:** Room4,No.399,Cailun Rd,Zhangjiang Hi-Tech Park, Pudong Shanghai,China

**Post code:** 201203

**Telephone:** +86-021-50791141/2/3

**Fax :** +86-021-50791141/2/3-8000

**Website:** <http://www.ta-shanghai.com>

**E-mail:** [service@ta-shanghai.com](mailto:service@ta-shanghai.com)

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2008-1482FCC

Page 3 of 175

**GENERAL SUMMARY**

<b>Product</b>	GSM Mobile Phone	<b>Model</b>	HUAWEI T566
<b>Client</b>	Huawei Technologies Co., Ltd.	<b>Type of test</b>	Entrusted
<b>Manufacturer</b>	Huawei Technologies Co., Ltd.	<b>Arrival Date of sample</b>	November 11 <sup>th</sup> , 2008
<b>Place of sampling</b>	(Blank)	<b>Carrier of the samples</b>	Peng Wang
<b>Quantity of the samples</b>	One	<b>Date of product</b>	(Blank)
<b>Base of the samples</b>	(Blank)	<b>Items of test</b>	SAR
<b>Series number</b>	WB5TAA18A2300115		
<b>Standard(s)</b>	<p><b>ANSI C95.1-2005:</b> IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p><b>IEEE 1528-2003:</b> Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Experimental Techniques.</p> <p><b>OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002:</b> Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.</p> <p><b>IEC 62209-1:</b> Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz).</p> <p><b>IEC 62209-2(draft):</b> Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR)for wireless communication devices used in close proximity to the human body .( frequency rang of 30MHz to 6GHz )</p>		
<b>Conclusion</b>	<p>Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 7.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 7.1 of this test report.</p> <p>General Judgment: <b>Pass</b></p> <p style="text-align: right;">(Stamp) <b>Date of issue: November 20<sup>th</sup>, 2008</b></p>		
<b>Comment</b>	The test result only responds to the measured sample.		

Approved by 杨伟中  
Weizhong Yang

Revised by 凌敏宝  
Minbao Ling

Performed by 石峰  
Feng Shi

## TABLE OF CONTENT

1.	COMPETENCE AND WARRANTIES .....	6
2.	GENERAL CONDITIONS .....	6
3.	DESCRIPTION OF EUT .....	7
3.1.	ADDRESSING INFORMATION RELATED TO EUT .....	7
3.2.	CONSTITUENTS OF EUT .....	7
3.3.	GENERAL DESCRIPTION .....	7
3.4.	TEST ITEM .....	8
4.	OPERATIONAL CONDITIONS DURING TEST .....	9
4.1.	GENERAL DESCRIPTION OF TEST PROCEDURES .....	9
4.2.	GSM TEST CONFIGURATION .....	9
5.	SAR MEASUREMENTS SYSTEM CONFIGURATION .....	10
5.1.	SAR MEASUREMENT SET-UP .....	10
5.2.	DASY4 E-FIELD PROBE SYSTEM .....	11
5.2.1.	EX3DV4 Probe Specification .....	11
5.2.2.	E-field Probe Calibration .....	12
5.3.	OTHER TEST EQUIPMENT .....	12
5.3.1.	Device Holder for Transmitters .....	12
5.3.2.	Phantom .....	13
5.4.	SCANNING PROCEDURE .....	14
5.5.	DATA STORAGE AND EVALUATION .....	15
5.5.1.	Data Storage .....	15
5.5.2.	Data Evaluation by SEMCAD .....	15
5.6.	SYSTEM SPECIFICATIONS .....	17
5.6.1.	Robotic System Specifications .....	17
5.7.	SYSTEM VALIDATION .....	18
5.8.	EQUIVALENT TISSUES .....	19
6.	LABORATORY ENVIRONMENT .....	20
7.	CHARACTERISTICS OF THE TEST .....	20
7.1.	APPLICABLE LIMIT REGULATIONS .....	20
7.2.	APPLICABLE MEASUREMENT STANDARDS .....	20
8.	CONDUCTED OUTPUT POWER MEASUREMENT .....	21
8.1.	SUMMARY .....	21
8.2.	POWER DRIFT .....	21
8.3.	CONDUCTED POWER .....	22
8.3.1.	Measurement Methods .....	22
8.3.2.	Measurement result .....	22
9.	TEST RESULTS .....	23
9.1.	DIELECTRIC PERFORMANCE .....	23
9.2.	SYSTEM VALIDATION RESULTS .....	23
9.3.	SUMMARY OF MEASUREMENT RESULTS .....	24

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2008-1482FCC

Page 5 of 175

---

9.4.	CONCLUSION .....	27
10.	MEASUREMENT UNCERTAINTY.....	28
11.	MAIN TEST INSTRUMENTS.....	29
12.	TEST PERIOD.....	29
13.	TEST LOCATION .....	29
ANNEX A : MEASUREMENT PROCESS.....		30
ANNEX B : TEST LAYOUT .....		31
ANNEX C : GRAPH RESULTS.....		34
ANNEX D : SYSTEM VALIDATION RESULTS.....		137
ANNEX E : PROBE CALIBRATION CERTIFICATE.....		139
ANNEX F : D835V2 DIPOLE CALIBRATION CERTIFICATE.....		148
ANNEX G : D1900V2 DIPOLE CALIBRATION CERTIFICATE.....		157
ANNEX H : DAE3 CALIBRATION CERTIFICATE.....		166
ANNEX I : THE EUT APPEARANCES AND TEST CONFIGURATION .....		171

## **1. COMPETENCE AND WARRANTIES**

**TA Technology (Shanghai) Co., Ltd.** is a test laboratory competent to carry out the tests described in this test report.

**TA Technology (Shanghai) Co., Ltd.** guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

**TA Technology (Shanghai) Co., Ltd.** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test.

## **2. GENERAL CONDITIONS**

This report only refers to the item that has undergone the test.

This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This document is only valid if complete; no partial reproduction can be made without written approval of **TA Technology (Shanghai) Co., Ltd.**

This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

### 3. DESCRIPTION OF EUT

#### 3.1. Addressing Information Related to EUT

**Table 1: Applicant (The Client)**

Name or Company	Huawei Technologies Co., Ltd.
Address/Post	Bantian, Longgang District
City	Shenzhen
Postal Code	518129
Country	P.R. China
Telephone	0755-28780808
Fax	0755-28780808

**Table 2: Manufacturer**

Name or Company	Huawei Technologies Co., Ltd.
Address/Post	Bantian, Longgang District
City	Shenzhen
Postal Code	518129
Country	P.R. China
Telephone	0755-28780808
Fax	0755-28780808

#### 3.2. Constituents of EUT

**Table 3: Constituents of Samples**

Description	Model	Serial Number	Manufacturer
Handset	HUAWEI T566	WB5TAA18A2300115	Huawei Technologies Co.,Ltd.
Lithium Battery	HBC80S	GAG8724XA3008965	Huawei Technologies Co.,Ltd.
AC/DC Adapter	HS-050040U2	HKA831500892	Huawei Technologies Co.,Ltd.

Note:

The EUT appearances see ANNEX I.

#### 3.3. General Description

Equipment Under Test (EUT) is a model of GSM Mobile Phone with internal antenna. It consists of Handset, Lithium Battery and AC/DC Adapter. The detail about Mobile phone, Lithium Battery and AC/DC Adapter is in Table 3. SAR is tested for GSM 850 and GSM 1900. It has the GPRS function, the GPRS class is 10.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2008-1482FCC

Page 8 of 175

**3.4. Test item**

**Table 4: Test item of EUT**

Device type :	portable device	
Exposure category:	uncontrolled environment / general population	
Device operating configurations :		
Operating mode(s):	GSM850; ( tested ) GSM1900; ( tested )	
Modulation:	GMSK,	
GPRS mobile station class :	A	
GPRS multislots class :	10	
Maximum no.of timeslots in uplink:	2	
Standard output power	(33dBm,2W)GSM850; ( tested ) (30dBm,1W)GSM1900; ( tested )	
Operating frequency range(s)	transmitter frequency range	receiver frequency range
GSM850: (tested)	824.2 MHz ~ 848.8 MHz	869.2 MHz ~ 893.8 MHz
GSM1900: (tested)	1850.2 MHz ~ 1909.8 MHz	1930.2 MHz ~ 1989.8 MHz
Power class	GSM 850: 4, tested with power level 5	
	GSM 1900: 1, tested with power level 0	
Test channel (Low –Middle –High)	128 -190 - 251 (GSM850) (tested) 512 - 661 – 810 (GSM1900) (tested)	
Hardware version:	Ver.D	
Software version:	CHNC01B130	
Antenna type:	integrated antenna	

## **4. OPERATIONAL CONDITIONS DURING TEST**

### **4.1. General description of test procedures**

The EUT is tested using a E5515C communications tester as controller unit to set test channels and maximum output power to the EUT, as well as for measuring the conducted peak power. Test positions as described in ANNEX I are in accordance with the specified test standard. Conducted output power was measured using an integrated RF connector and attached RF cable.

To make the mobile emits maximum power; the output power of E5515C would be adjusted to minimum power with the sensitivity of the mobile station to build steady connection with mobile station. The power level control parameter "5" of GSM850, "0" of GSM1900. It means that requires mobile station to emit with maximum power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 30 dB.

### **4.2. GSM Test Configuration**

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using E5515C the power level is set to "5" in head SAR and body SAR of GSM850, set to "0" in head SAR and body SAR of GSM1900,

The tests in the band of GSM 850 and GSM 1900 are performed in the mode of speech transfer function and GPRS. And since the GPRS class is 10 for this EUT, it has at most 2 timeslots in uplink.

## 5. SAR MEASUREMENTS SYSTEM CONFIGURATION

### 5.1. SAR Measurement Set-up

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m) which positions the probes with a positional repeatability of better than  $\pm 0.02\text{mm}$ . Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teaches pendant (Joystick) and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2003 system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

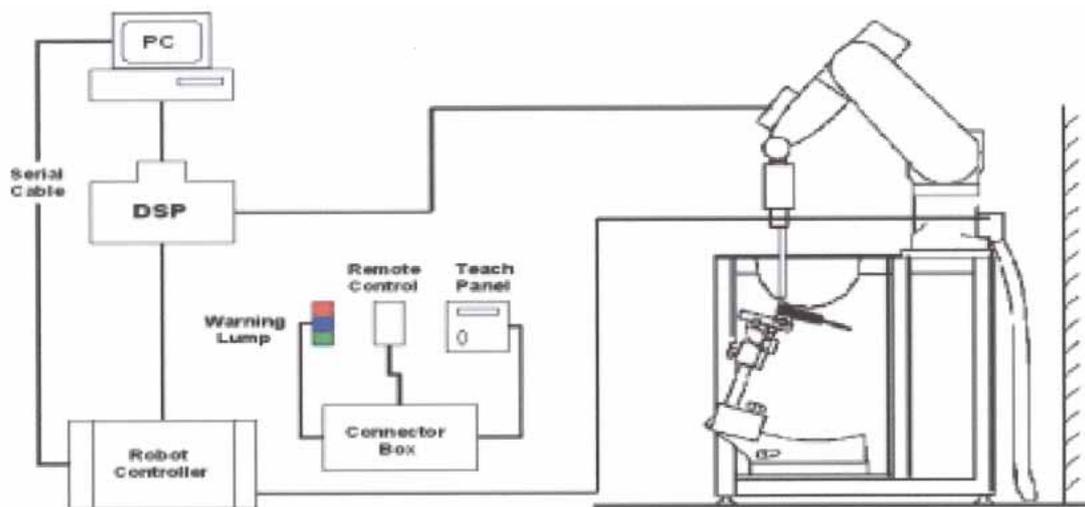


Figure 1 SAR Lab Test Measurement Set-up

The DAE3 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

## 5.2. Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

### 5.2.1. EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 900 and HSL 1800 Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



**Figure 2. EX3DV4 E-field Probe**



**Figure 3. EX3DV4 E-field probe**

### 5.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),  
C = Heat capacity of tissue (brain or muscle),  
 $\Delta T$  = Temperature increase due to RF exposure.  
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:  
 $\sigma$  = Simulated tissue conductivity,  
 $\rho$  = Tissue density (kg/m<sup>3</sup>).

### 5.3. Other Test Equipment

#### 5.3.1. Device Holder for Transmitters

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeat ably positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



**Figure 4 Device Holder**

### 5.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



**Figure 5 Generic Twin Phantom**

#### **5.4. Scanning procedure**

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The "reference" and "drift" measurements are located at the beginning and end of the batch process.

They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max.  $\pm 5\%$ .

- The "surface check" measurement tests the optical surface detection system of the DASY4 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)
- The "area scan" measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension. If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.
- A "7x7x7 zoom scan" measures the field in a volume around the 2D peak SAR value acquired in the previous "coarse" scan. This is a fine 7x7 grid where the robot additionally moves the probe in 7 steps along the z-axis away from the bottom of the Phantom. Grid spacing for the cube measurement is 5mm in x and y-direction and 5 mm in z-direction. DASY4 is also able to perform repeated zoom scans if more than 1 peak is found during area scan.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2mm steps.

## 5.5. Data Storage and Evaluation

### 5.5.1. Data Storage

The DASY4 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 5.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai <sub>0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	Dcp <sub>i</sub>
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$U_i$  = input signal of channel i (i = x, y, z)

$cf$  = crest factor of exciting field (DASY parameter)

$dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:  $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes:  $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$Norm_i$  = sensor sensitivity of channel i (i = x, y, z)  
[mV/(V/m)<sup>2</sup>] for E-field Probes

$ConvF$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel i in V/m

$H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with **SAR** = local specific absorption rate in mW/g

**$E_{tot}$**  = total field strength in V/m

**$\sigma$**  = conductivity in [mho/m] or [Siemens/m]

**$\rho$**  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  **$P_{pwe}$**  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

**$E_{tot}$**  = total electric field strength in V/m

**$H_{tot}$**  = total magnetic field strength in A/m

## 5.6. System Specifications

### 5.6.1. Robotic System Specifications

#### Specifications

**Positioner:** Stäubli Unimation Corp. Robot Model: RX90L

**Repeatability:** ±0.02 mm

**No. of Axis:** 6

#### Data Acquisition Electronic (DAE) System

##### Cell Controller

**Processor:** Pentium III

**Clock Speed:** 800 MHz

**Operating System:** Windows 2003

##### Data Converter

**Features:** Signal Amplifier, multiplexer, A/D converter, and control logic

**Software:** DAS4 software

**Connecting Lines:** Optical downlink for data and status info. Optical uplink for commands and clock.

## 5.7. System validation

System validation is performed by using a validation dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 1000 mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the validation to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test.

Validation results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System validation is performed regularly on all frequency bands where tests are performed with the DASY 4 system.

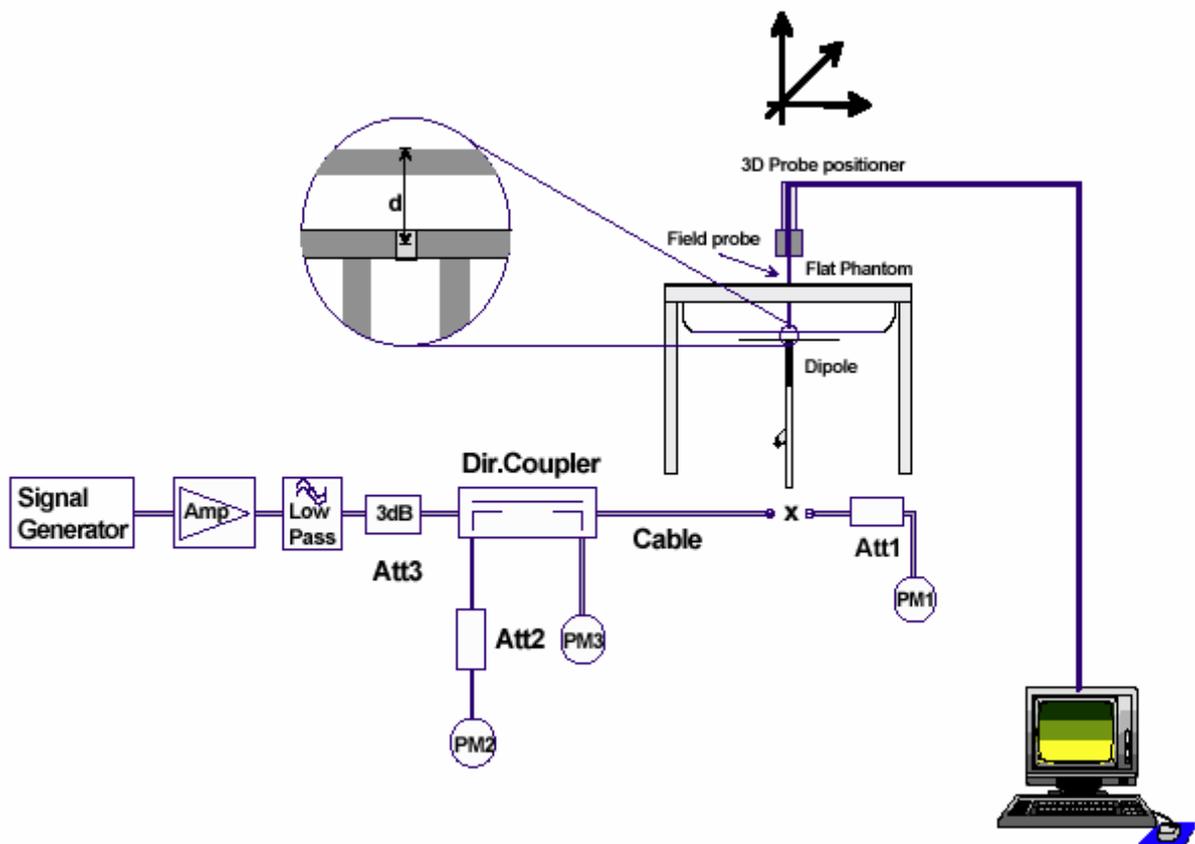


Figure 6 System validation Set-up

### 5.8. Equivalent Tissues

The liquid is consisted of water, salt, Glycol, Sugar, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 5 and Table 6 show the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the OET 65.

**Table 5: Composition of the Head Tissue Equivalent Matter**

MIXTURE%	FREQUENCY(Brain) 835MHz
Water	41.45
Sugar	56
Salt	1.45
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=41.5$ $\sigma=0.9$

MIXTURE%	FREQUENCY(Brain)1900MHz
Water	55.242
Glycol monobutyl	44.452
Salt	0.306
Dielectric Parameters Target Value	f=1900MHz $\epsilon=40.0$ $\sigma=1.40$

**Table 6: Composition of the Body Tissue Equivalent Matter**

MIXTURE%	FREQUENCY(Body)835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

MIXTURE%	FREQUENCY (Body) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

## 6. LABORATORY ENVIRONMENT

**Table 7: The Ambient Conditions during Test**

Temperature	Min. = 20°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 $\Omega$
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

## 7. CHARACTERISTICS OF THE TEST

### 7.1. Applicable Limit Regulations

**ANSI C95.1–2005:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

### 7.2. Applicable Measurement Standards

**IEEE 1528–2003:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Experimental Techniques.

**OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002:** Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.

**IEC 62209-1:** Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz).

**IEC 62209-2(draft):** Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR)for wireless communication devices used in close proximity to the human body .( frequency rang of 30MHz to 6GHz )

## **8. CONDUCTED OUTPUT POWER MEASUREMENT**

### **8.1. Summary**

During the process of testing, the EUT was controlled via Digital Radio Communication tester to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT.

### **8.2. Power Drift**

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 12 to Table 15 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 0.21dB.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**8.3. Conducted Power**

**8.3.1. Measurement Methods**

The EUT was set up for the maximum output power. The channel power was measured .The measurements were done both before and after SAR tests for each test band.

**8.3.2. Measurement result**

**Table 8: Conducted Power Measurement Results**

<b>GSM 850</b>	<b>Conducted Power</b>		
	Channel 128	Channel 190	Channel 251
	(824.2MHz)	(836.6MHz)	(848.8MHz)
Before Test (dBm)	31.9	31.8	32.1
After Test (dBm)	32.0	32.0	32.1
<b>GSM 850+GPRS</b>	<b>Conducted Power</b>		
	Channel 128	Channel 190	Channel 251
	(824.2MHz)	(836.6MHz)	(848.8MHz)
Before Test (dBm)	32.3	32.2	32.4
After Test (dBm)	32.2	32.4	32.4
<b>GSM 1900</b>	<b>Conducted Power</b>		
	Channel 512	Channel 661	Channel 810
	(1850.2MHz)	(1880MHz)	(1909.8MHz)
Before Test (dBm)	29.3	29.2	29.3
After Test (dBm)	29.1	29.2	29.3
<b>GSM 1900+GPRS</b>	<b>Conducted Power</b>		
	Channel 512	Channel 661	Channel 810
	(1850.2MHz)	(1880MHz)	(1909.8MHz)
Before Test (dBm)	29.4	29.4	29.3
After Test (dBm)	29.4	29.3	29.2

## 9. TEST RESULTS

### 9.1. Dielectric Performance

**Table 9: Dielectric Performance of Head Tissue Simulating Liquid**

Measurement is made at temperature 22.5 °C and relative humidity 51%. Liquid temperature during the test: 22.3°C					
Frequency (MHz)		Target value	Measurement value	Difference percentage	
<b>835 (Brain)</b>	Permittivity $\epsilon_r$	41.50	42.47	2.34	%
	Conductivity $\sigma$	0.90	0.924	2.67	%
<b>1900 (Brain)</b>	Permittivity $\epsilon_r$	40.00	40.12	0.30	%
	Conductivity $\sigma$	1.40	1.393	-0.50	%

**Table 10: Dielectric Performance of Body Tissue Simulating Liquid**

Measurement is made at temperature 22.5 °C and relative humidity 51%. Liquid temperature during the test: 22.3°C					
Frequency (MHz)		Target value	Measurement value	Difference percentage	
<b>835 (Body)</b>	Permittivity $\epsilon_r$	55.20	55.62	0.76	%
	Conductivity $\sigma$	0.97	0.98	1.03	%
<b>1900 (Body)</b>	Permittivity $\epsilon_r$	53.30	52.95	-0.66	%
	Conductivity $\sigma$	1.52	1.548	1.84	%

### 9.2. System Validation Results

**Table 11: System Validation**

Measurement is made at temperature 23.2 °C, relative humidity 50%, and input power 250 mW. Liquid temperature during the test: 22.3°C							
Liquid parameters	Frequency	Permittivity $\epsilon$		Conductivity $\sigma$ (S/m)			
	835MHz	42.47		0.924			
	1900MHz	40.12		1.393			
Verification results	Frequency	Target value (W/kg)		Measurement value (W/kg)		Difference percentage	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1g Average
	835MHz	1.52	2.30	1.50	2.30	-1.32%	0.00%
	1900MHz	5.06	9.84	5.09	9.74	0.59%	-1.02%

Note :

1. Target Values used derive from the SPEAG calibration certificate and 250 mW is used as feeding power to the validation dipole (SPEAG using).
2. The graph results see ANNEX D.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**9.3. Summary of Measurement Results**

**Table 12: SAR Values (GSM850, Head)**

Liquid Temperature: 22.5					
Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Head		Measurement Result(W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel	10 g Average	1 g Average	Power Drift (dB)	
Left hand, Touch cheek	High	0.777	1.140	-0.014	Figure 8
	Middle	0.666	0.976	-0.193	Figure 10
	Low	0.423	0.617	0.033	Figure 12
Left hand, Tilt 15 Degree	High	0.368	0.511	0.056	Figure 14
	Middle	0.313	0.434	0.044	Figure 16
	Low	0.198	0.273	0.047	Figure 18
Right hand, Touch cheek	High	0.703	1.040	0.070	Figure 20
	Middle	0.628	0.928	0.059	Figure 22
	Low	0.411	0.607	0.081	Figure 24
Right hand, Tilt 15 Degree	High	0.337	0.470	-0.023	Figure 26
	Middle	0.306	0.421	-0.030	Figure 28
	Low	0.209	0.288	-0.035	Figure 30

Note: 1.The value with blue color is the maximum SAR Value of test case of head in each test band.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**Table 13: SAR Values (GSM850, Body, Distance 20mm)**

Liquid Temperature: 22.5					
Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Body		Measurement Result (W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
Towards Ground	High	0.371	0.521	-0.023	Figure 32
	Middle	<b>0.408</b>	<b>0.570</b>	0.019	Figure 34
	Low	0.306	0.428	-0.033	Figure 36
Towards Phantom	High	0.339	0.476	0.007	Figure 38
	Middle	0.363	0.507	0.026	Figure 40
	Low	0.266	0.370	0.010	Figure 42
Worst case position of Body with Earphone					
Towards Ground	Middle	0.294	0.410	0.042	Figure 44
Test Case of Body with GPRS(2 timeslots in uplink)					
Towards Ground	High	0.715	1.000	0.059	Figure 46
	Middle	<b>0.794</b>	<b>1.110</b>	-0.012	Figure 48
	Low	0.644	0.899	0.096	Figure 50
Towards Phantom	High	0.662	0.927	0.075	Figure 52
	Middle	0.666	0.929	-0.058	Figure 54
	Low	0.531	0.740	-0.021	Figure 56

Note: 1. The value with blue color is the maximum SAR Value of test case of body in each test band.  
2. Tests in body position were performed with 20 mm air gap between DUT and Phantom to simulate the use of a non-metallic belt-clip or holster.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2008-1482FCC

Page 26of 175

**Table 14: SAR Values (GSM1900, Head)**

Liquid Temperature: 22.5					
Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Head		Measurement Result(W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
Left hand, Touch cheek	High	0.626	1.060	0.065	Figure 58
	Middle	0.598	1.010	-0.020	Figure 60
	Low	0.514	0.855	-0.078	Figure 62
Left hand, Tilt 15 Degree	High	0.228	0.374	-0.018	Figure 64
	Middle	0.215	0.352	-0.045	Figure 66
	Low	0.202	0.327	-0.043	Figure 68
Right hand, Touch cheek	High	0.497(max.cube)	0.851(max.cube)	-0.075	Figure 70
	Middle	0.466(max.cube)	0.792(max.cube)	-0.062	Figure 72
	Low	0.400(max.cube)	0.670(max.cube)	-0.037	Figure 74
Right hand, Tilt 15 Degree	High	0.243	0.408	-0.040	Figure 76
	Middle	0.227	0.378	0.002	Figure 78
	Low	0.218	0.359	-0.043	Figure 80

**Note:** 1.The value with blue color is the maximum SAR Value of test case of head in each test band.  
2. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the tables above, the value from the second assessed cube is given in the SAR distribution plots (see ANNEX C).

# TA Technology (Shanghai) Co., Ltd.

## Test Report

**Table 15: SAR Values (GSM1900, Body, Distance 20mm)**

Liquid Temperature: 22.5					
Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Body		Measurement Result (W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
Towards Ground	High	<b>0.155(max.cube)</b>	<b>0.256(max.cube)</b>	-0.118	Figure 82
	Middle	0.134(max.cube)	0.221(max.cube)	-0.111	Figure 84
	Low	0.126(max.cube)	0.208(max.cube)	0.115	Figure 86
Towards Phantom	High	0.122(max.cube)	0.201(max.cube)	-0.176	Figure 88
	Middle	0.112(max.cube)	0.184(max.cube)	-0.134	Figure 90
	Low	0.105(max.cube)	0.172(max.cube)	0.074	Figure 92
Worst case position of Body with Earphone					
Towards Ground	High	0.147(max.cube)	0.247(max.cube)	-0.166	Figure 94
Test Case of Body with GPRS(2 timeslots in uplink)					
Towards Ground	High	<b>0.280 (max.cube)</b>	<b>0.471(max.cube)</b>	-0.113	Figure 96
	Middle	0.266(max.cube)	0.446(max.cube)	-0.062	Figure 98
	Low	0.233(max.cube)	0.391(max.cube)	-0.017	Figure 100
Towards Phantom	High	0.281(max.cube)	0.468(max.cube)	-0.172	Figure 102
	Middle	0.233(max.cube)	0.389(max.cube)	-0.135	Figure 104
	Low	0.222(max.cube)	0.369(max.cube)	-0.071	Figure 106

- Note: 1. The value with blue color is the maximum SAR Value of test case of Body in each test band.
2. Tests in body position were performed with 20 mm air gap between DUT and Phantom to simulate the use of a non-metallic belt-clip or holster.
3. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the tables above, the value from the second assessed cube is given in the SAR distribution plots (see ANNEX C).

### 9.4. Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 7.2 of this report. Maximum localized SAR is 1.14 W/kg of head and Maximum localized SAR is 1.11 W/kg of body that are below exposure limits specified in the relevant standards cited in Clause 7.1 of this test report.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2008-1482FCC

Page 28of 175

**10. MEASUREMENT UNCERTAINTY**

No.	a	Type	c	d	e=f(d, k)	f	h=cxf / e	k
	Uncertainty Component		Tol. (±%)	Prob. Dist	Div.	c <sub>1</sub> (1g)	1g u (± %)	v <sub>1</sub>
1	System repetivity	A	0.5	N	1	1	0.5	9
Measurement system								
2	Probe Calibration	B	5	N	2	1	2.5	∞
3	Axial isotropy	B	4.7	R	$\sqrt{3}$	$(1-c_p)_{1/2}$	4.3	∞
4	Hemisphere Isotropy	B	9.4	R	$\sqrt{3}$	$\sqrt{C_P}$		∞
5	Boundary Effect	B	0.4	R	$\sqrt{3}$	1	0.23	∞
6	Linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
7	System Detection Limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
8	Readout Electronics	B	1.0	N	1	1	1.0	∞
9	RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
10	Probe Positioner Mechanical Tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
11	Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
12	Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Test Sample Related								
13	Test Sample Positioning	A	4.9	N	1	1	4.9	N-1
14	Device Holder Uncertainty	A	6.1	N	1	1	6.1	N-1
15	Output Power Variation-SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
Phantom and Tissue Parameters								
16	Phantom Uncertainty(shape and thickness tolerances)	B	1.0	R	$\sqrt{3}$	1	0.6	∞
17	Liquid Conductivity-deviation from target values	B	5.0	R	$\sqrt{3}$	0.64	1.7	∞
18	Liquid Conductivity-measurement uncertainty	B	5.0	N	1	0.64	1.7	M
19	Liquid Permittivity-deviation from target values	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
20	Liquid Permittivity- measurement uncertainty	B	5.0	N	1	0.6	1.7	M
Combined Standard Uncertainty							11.25	
Expanded Uncertainty (95 % CONFIDENCE INTERVAL)							22.5	

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2008-1482FCC

Page 29 of 175

## 11. MAIN TEST INSTRUMENTS

**Table 16: List of Main Instruments**

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 14, 2008	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 14, 2008	One year
04	Power sensor	Agilent 8481H	MY41091316	March 14, 2008	One year
05	Signal Generator	HP 8341B	2730A00804	September 14, 2008	One year
06	Amplifier	IXA-020	0401	No Calibration Requested	
07	BTS	E5515C	GB46490218	September 14, 2008	One year
08	E-field Probe	EX3DV4	3660	September 3, 2008	One year
09	DAE	DAE3	536	August 28, 2008	One year
10	Validation Kit 835MHz	D835V2	4d020	July 21, 2008	One year
11	Validation Kit 1900MHz	D1900V2	5d060	July 22, 2008	One year

## 12. TEST PERIOD

The test is performed from November 16, 2008 to November 19, 2008.

## 13. TEST LOCATION

The test is performed at TA Technology (Shanghai) Co., Ltd.

\*\*\*\*\*END OF REPORT BODY\*\*\*\*\*

## **ANNEX A : MEASUREMENT PROCESS**

The evaluation was performed with the following procedure:


Step 1: Measurement of the SAR value at a fixed location above the ear point was measured and was used as a reference value for assessing the power drop.

Step 2: The area covered the entire dimension of the head and the horizontal grid spacing was 15 mm x 15 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point, a volume of 32 mm x 32 mm x 34 mm was assessed by measuring 7 x 7 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

- a. The data at the surface were extrapolated. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
- c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation is repeated.

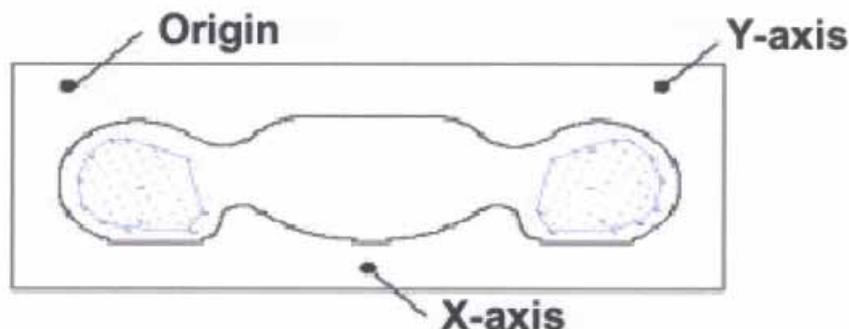


**Figure 7 SAR Measurement Points in Area Scan**

**ANNEX B : TEST LAYOUT**




Picture 1: Specific Absorption Rate Test Layout

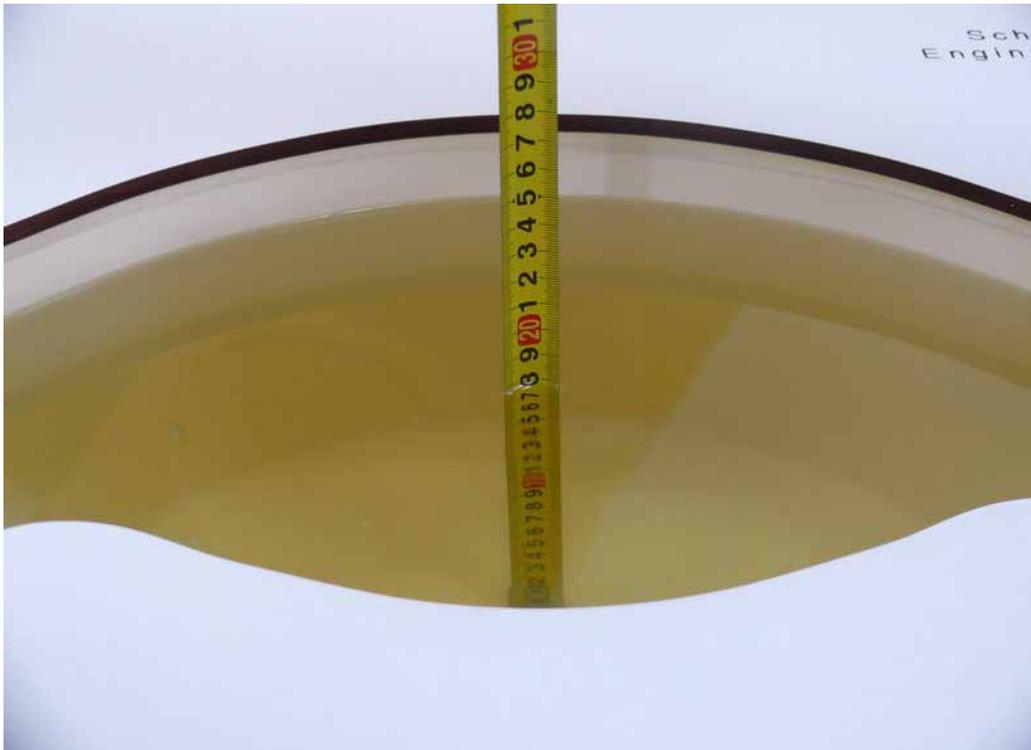

Picture 2: Liquid depth in the flat Phantom (835MHz)



Picture 3: Liquid depth in the head Phantom (835MHz)

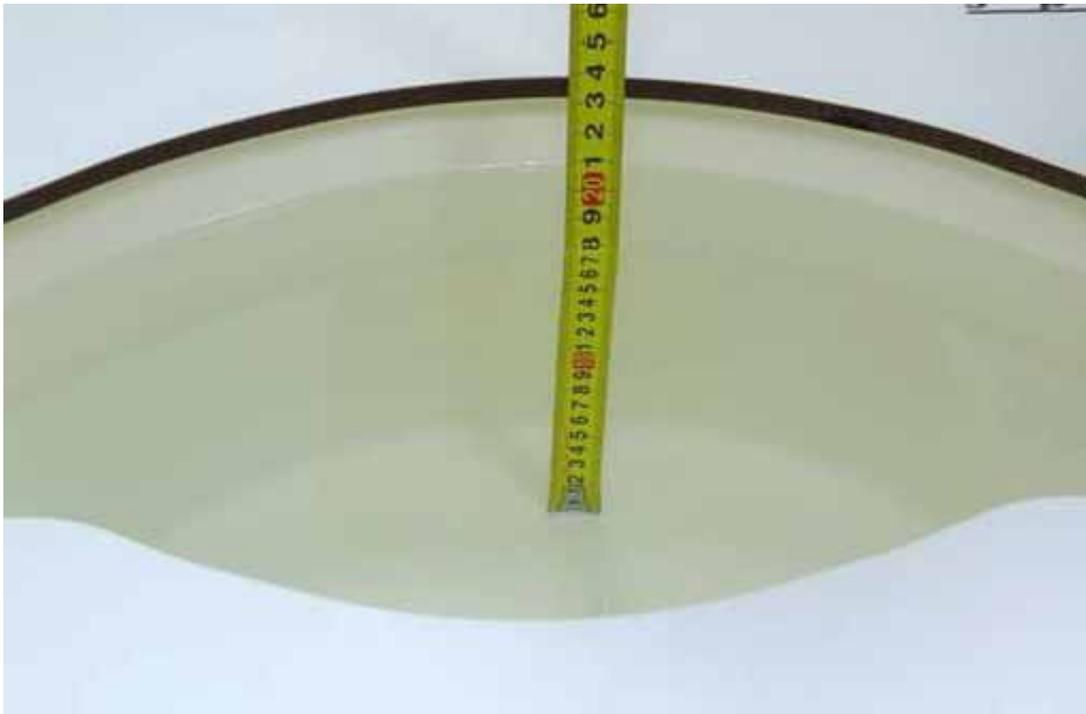

Picture 4: Liquid depth in the flat Phantom (1900 MHz)



Picture 5: liquid depth in the head Phantom (1900 MHz)

## ANNEX C : GRAPH RESULTS

### GSM 850 Left Cheek High

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.94$  mho/m;  $\epsilon_r = 42.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.19, 9.19, 9.19);

Electronics: DAE3 Sn536;

**Cheek High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.20 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.777 mW/g**

Maximum value of SAR (measured) = 1.22 mW/g

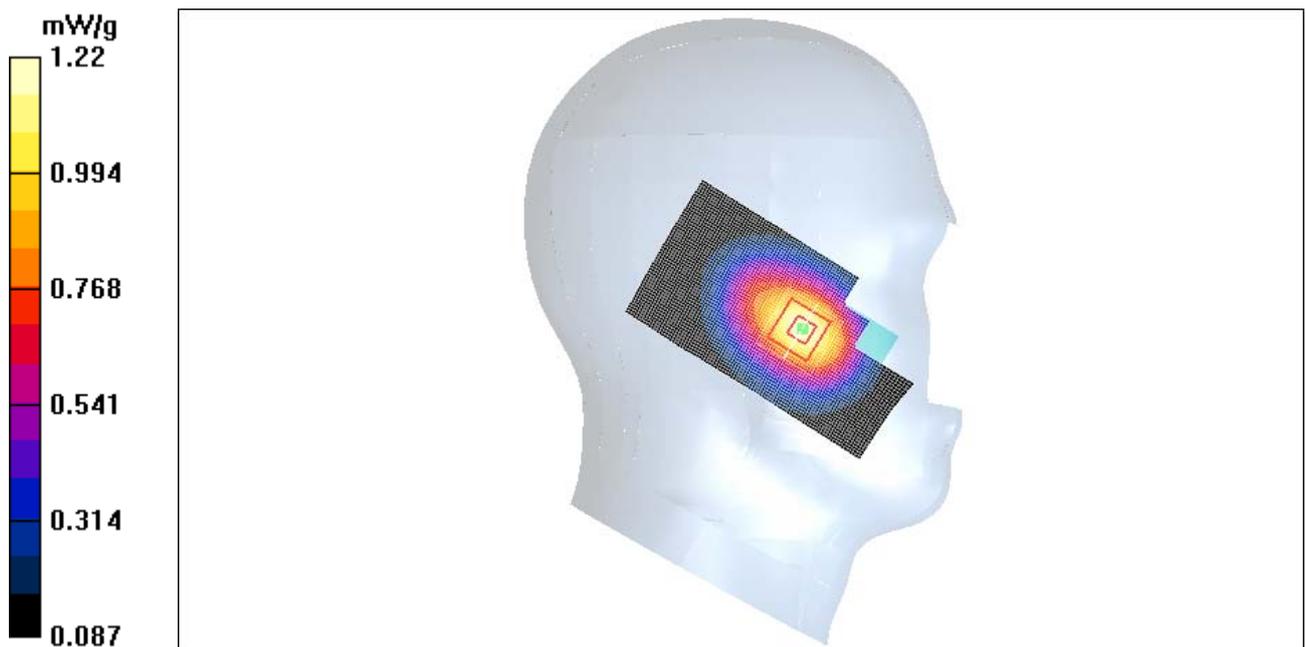


Figure 8 Left Hand Touch Cheek GSM 850 Channel 251

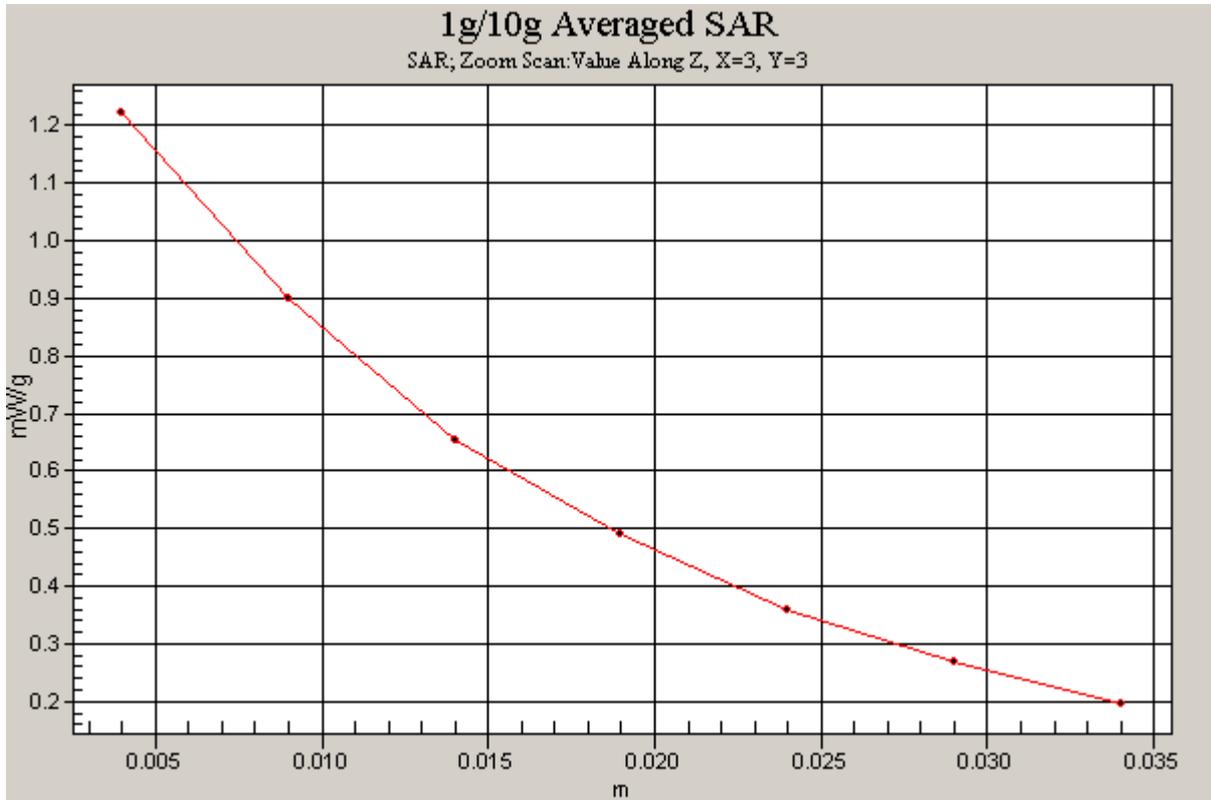


Figure 9 Z-Scan at power reference point (Left Hand Touch Cheek GSM 850 Channel 251)

### GSM 850 Left Cheek Middle

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.928$  mho/m;  $\epsilon_r = 42.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.19, 9.19, 9.19);

Electronics: DAE3 Sn536;

**Cheek Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.02 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = -0.193 dB

Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 0.976 mW/g; SAR(10 g) = 0.666 mW/g**

Maximum value of SAR (measured) = 1.05 mW/g

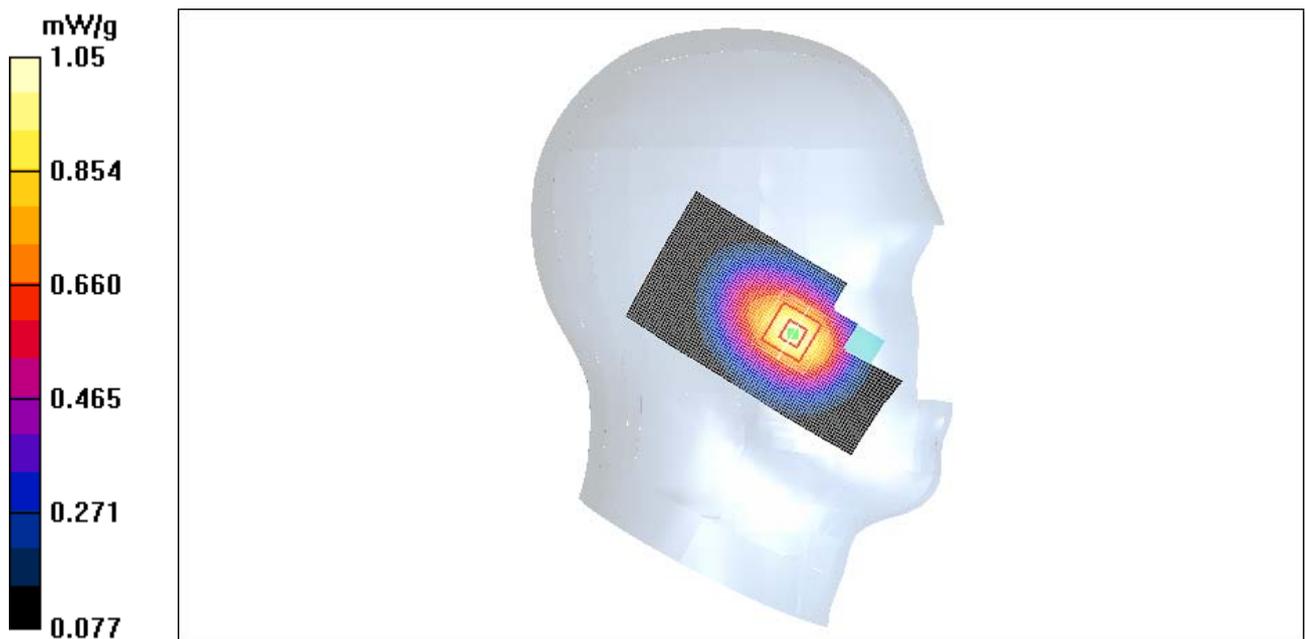


Figure 10 Left Hand Touch Cheek GSM 850 Channel 190

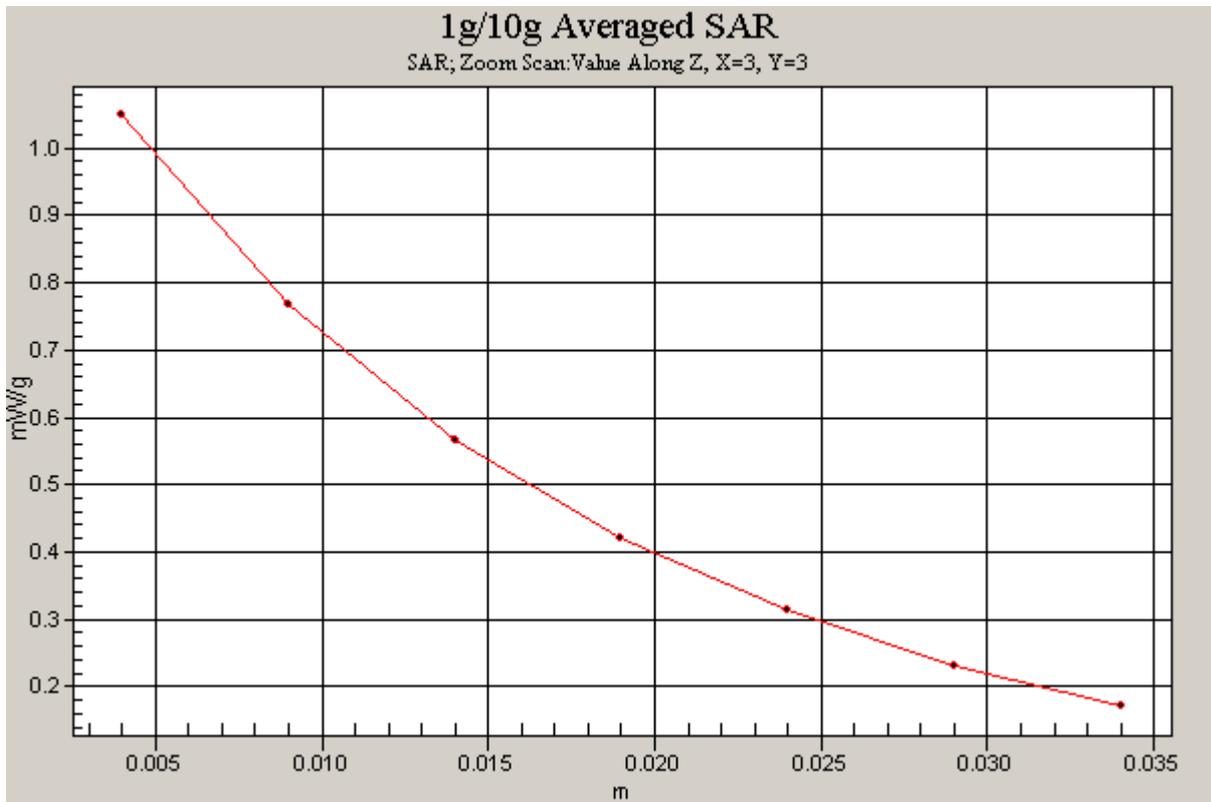


Figure 11 Z-Scan at power reference point (Left Hand Touch Cheek GSM 850 Channel 190)

**GSM 850 Left Cheek Low**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 42.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.19, 9.19, 9.19);

Electronics: DAE3 Sn536;

**Cheek Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.647 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.75 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.852 W/kg

**SAR(1 g) = 0.617 mW/g; SAR(10 g) = 0.423 mW/g**

Maximum value of SAR (measured) = 0.660 mW/g

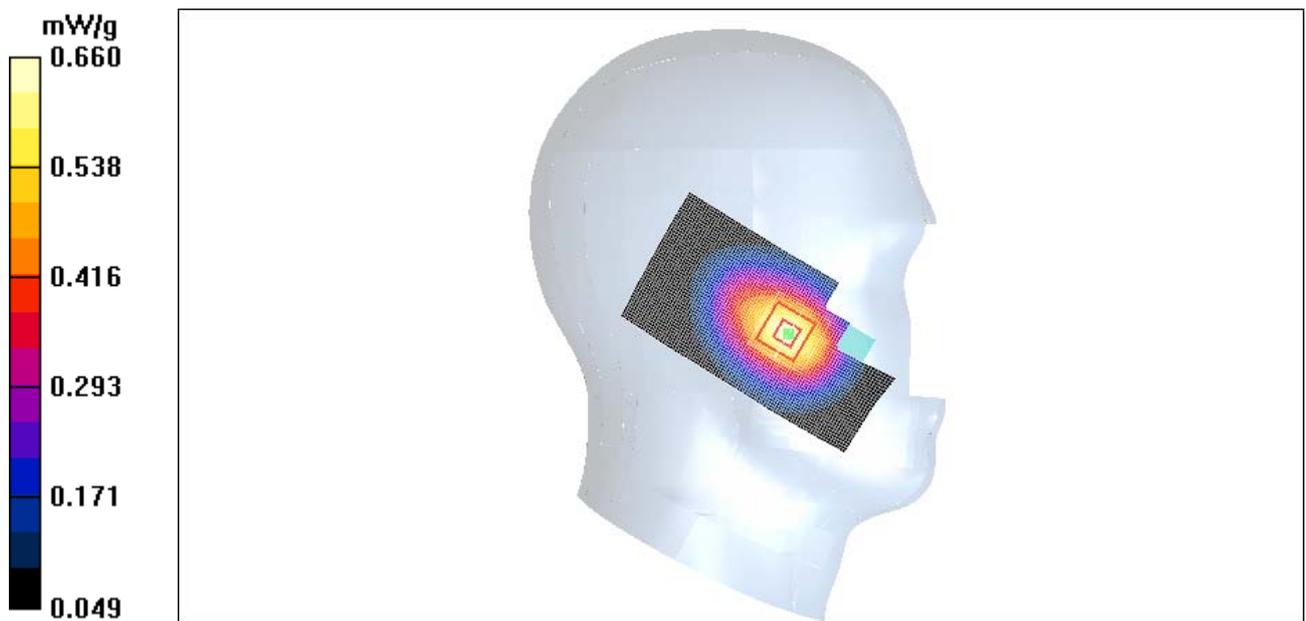


Figure 12 Left Hand Touch Cheek GSM 850 Channel 128

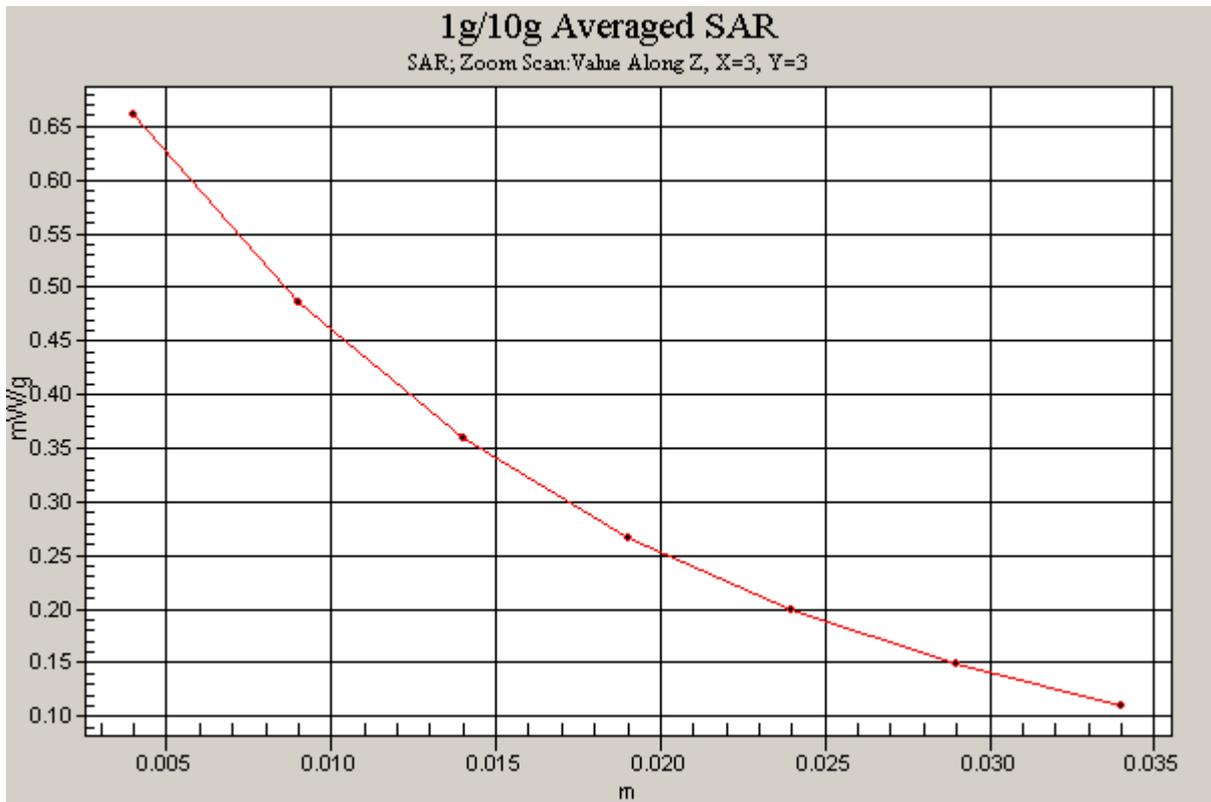


Figure 13 Z-Scan at power reference point (Left Hand Touch Cheek GSM 850 Channel 128)

### GSM 850 Left Tilt High

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.94$  mho/m;  $\epsilon_r = 42.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.19, 9.19, 9.19);

Electronics: DAE3 Sn536;

**Tilt High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.538 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 0.675 W/kg

**SAR(1 g) = 0.511 mW/g; SAR(10 g) = 0.368 mW/g**

Maximum value of SAR (measured) = 0.542 mW/g

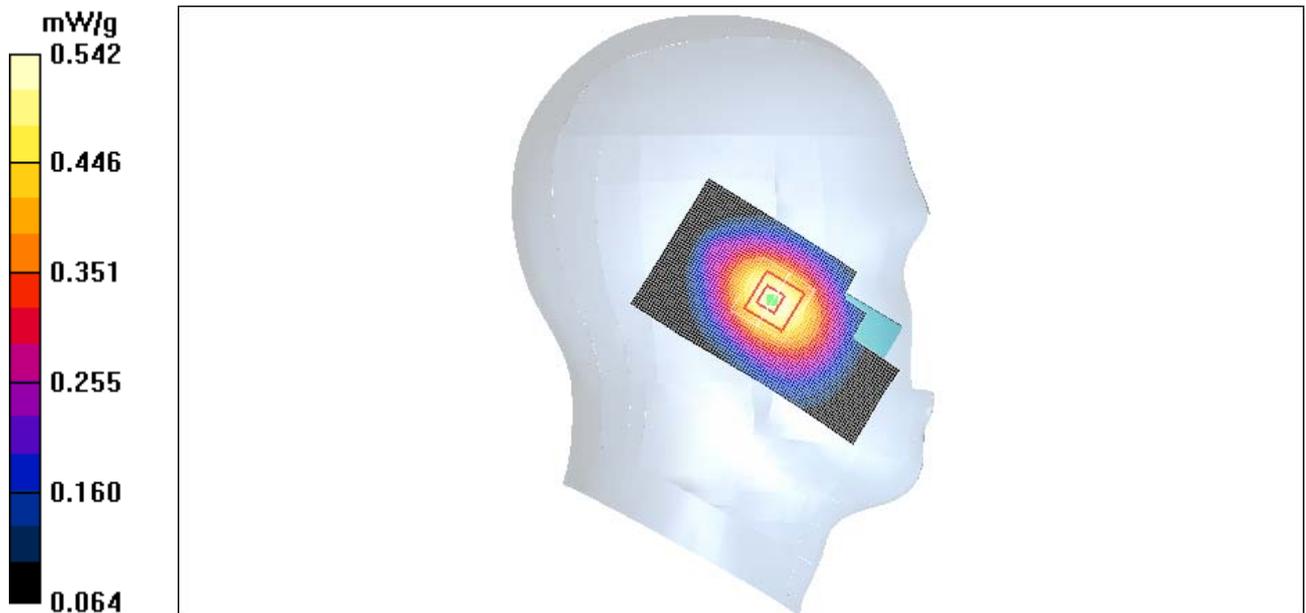


Figure 14 Left Hand Tilt 15° GSM 850 Channel 251

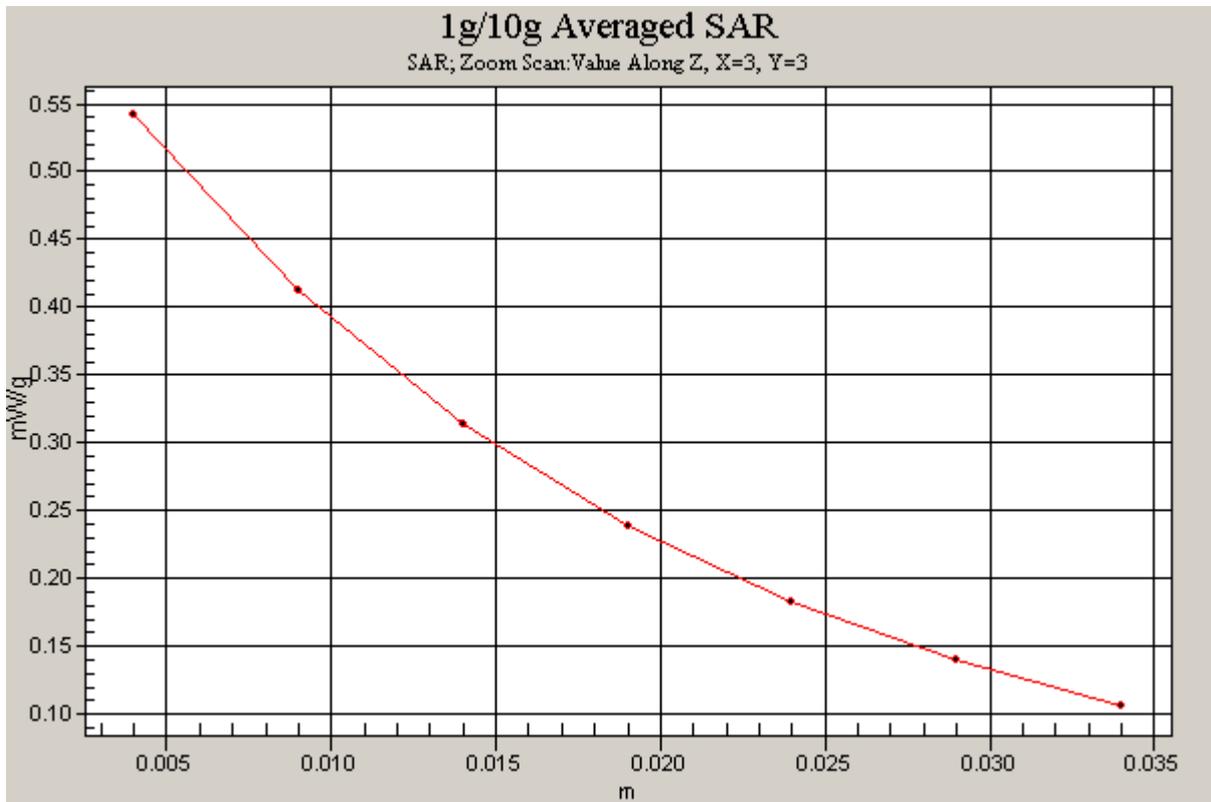


Figure 15 Z-Scan at power reference point (Left Hand Tilt 15° GSM 850 Channel 251)

### GSM 850 Left Tilt Middle

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.928$  mho/m;  $\epsilon_r = 42.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.19, 9.19, 9.19);

Electronics: DAE3 Sn536;

**Tilt Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.453 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.574 W/kg

**SAR(1 g) = 0.434 mW/g; SAR(10 g) = 0.313 mW/g**

Maximum value of SAR (measured) = 0.460 mW/g

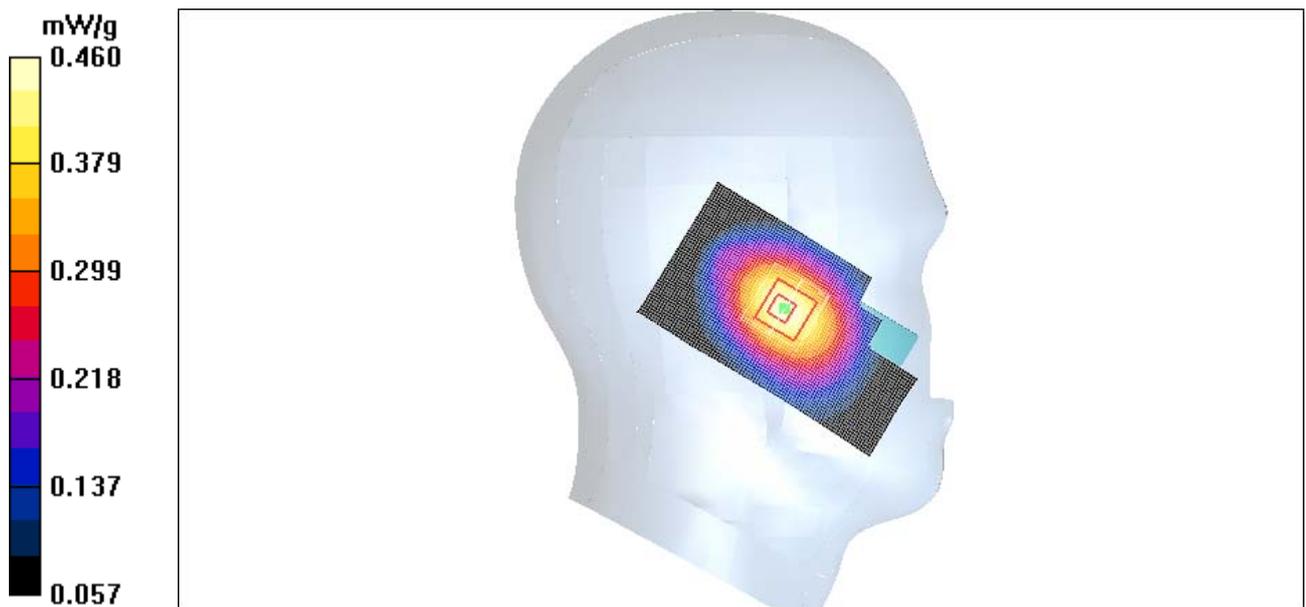


Figure 16 Left Hand Tilt 15 ° GSM 850 Channel 190

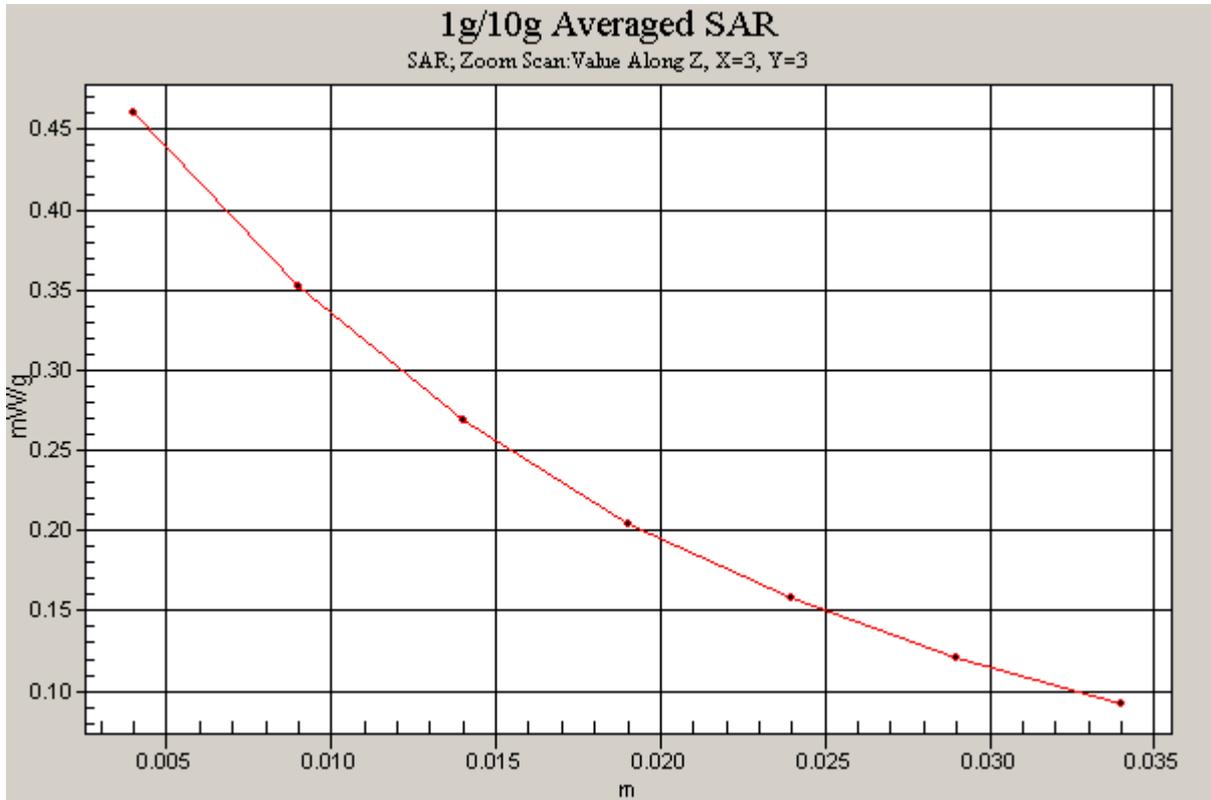


Figure 17 Z-Scan at power reference point (Left Hand Tilt 15 ° GSM 850 Channel 190)

**GSM 850 Left Tilt Low**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 42.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.19, 9.19, 9.19);

Electronics: DAE3 Sn536;

**Tilt Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.284 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.363 W/kg

**SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.198 mW/g**

Maximum value of SAR (measured) = 0.289 mW/g

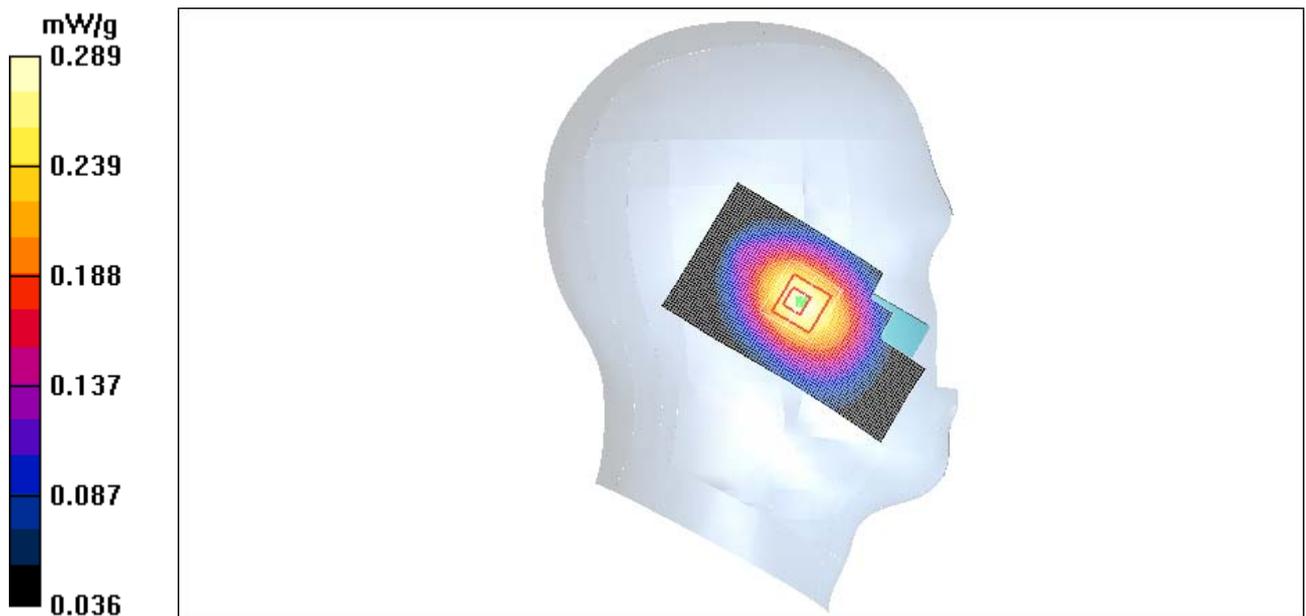


Figure 18 Left Hand Tilt 15 ° GSM 850 Channel 128

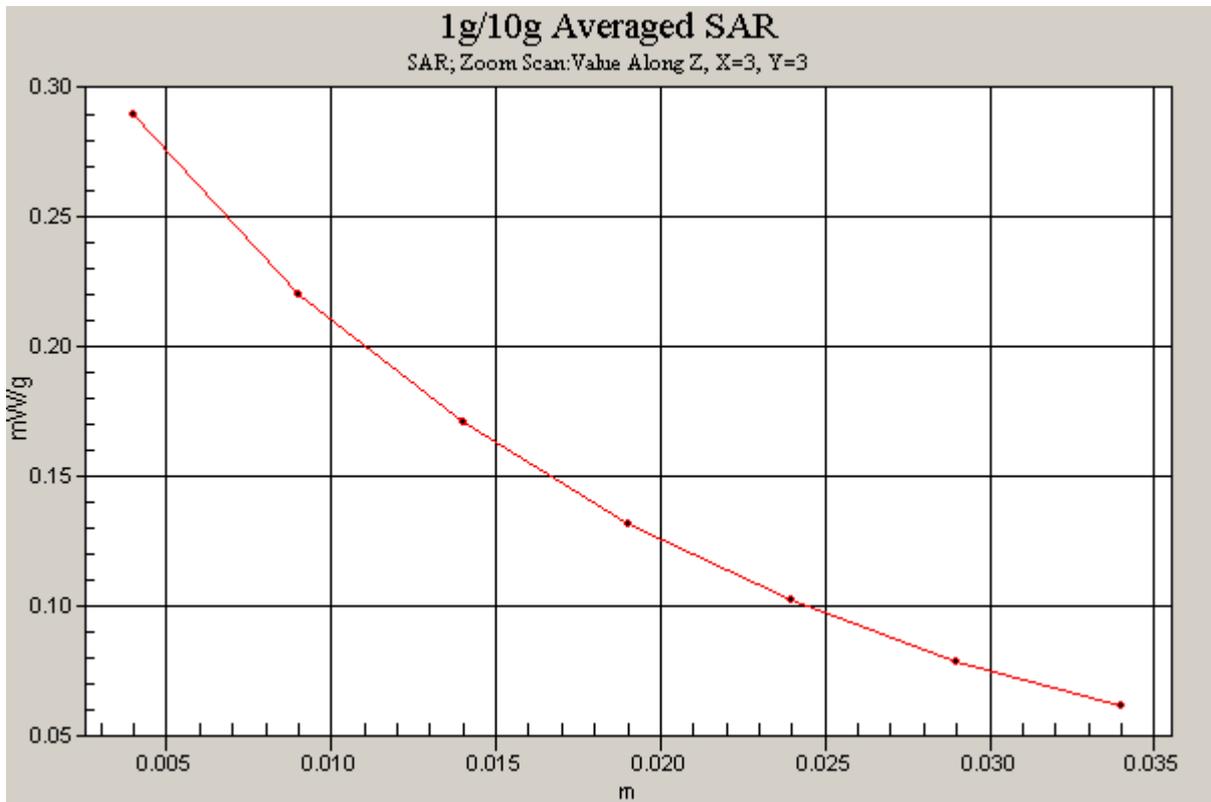


Figure 19 Z-Scan at power reference point (Left Hand Tilt 15 ° GSM 850 Channel 128)

### GSM 850 Right Cheek High

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.94$  mho/m;  $\epsilon_r = 42.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.19, 9.19, 9.19);

Electronics: DAE3 Sn536;

**Cheek High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = 0.070 dB

Peak SAR (extrapolated) = 1.49 W/kg

**SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.703 mW/g**

Maximum value of SAR (measured) = 1.14 mW/g

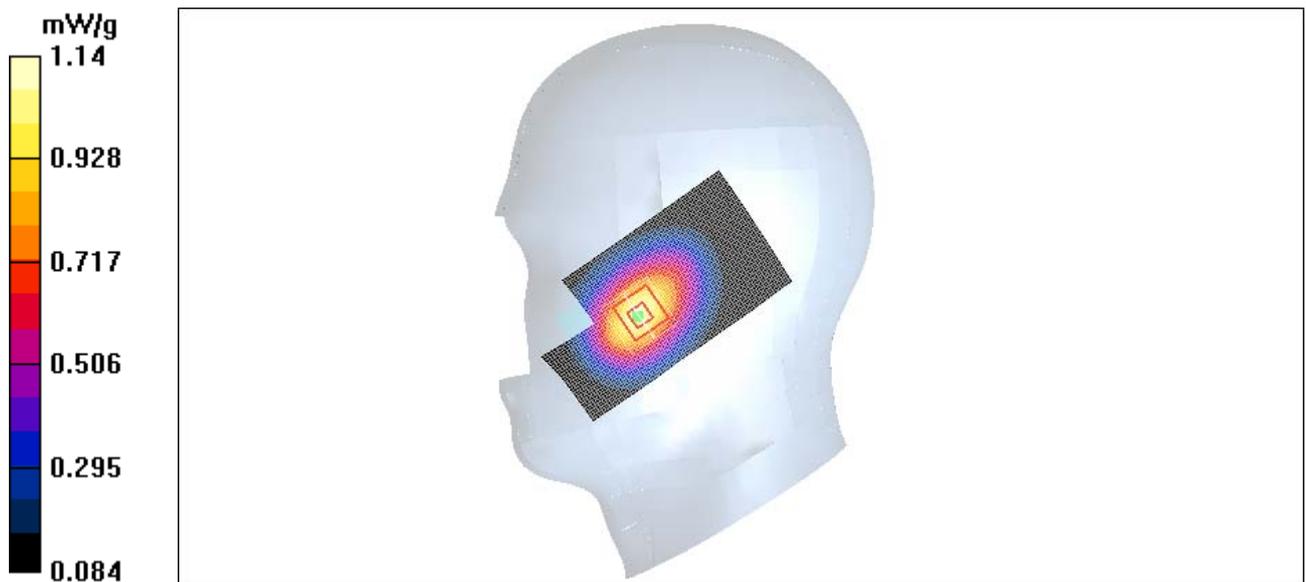


Figure 20 Right Hand Touch Cheek GSM 850 Channel 251

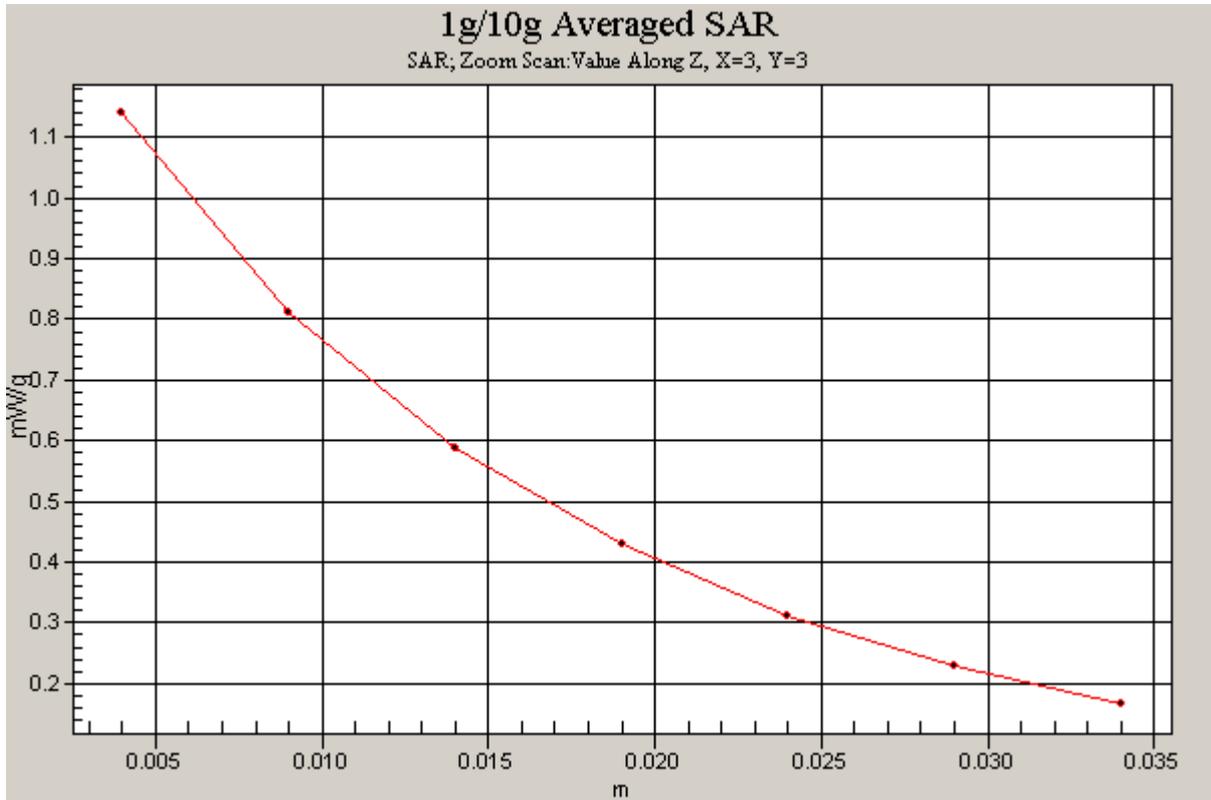


Figure 21 Z-Scan at power reference point (Right Hand Touch Cheek GSM 850 Channel 251)

### GSM 850 Right Cheek Middle

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.928$  mho/m;  $\epsilon_r = 42.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.19, 9.19, 9.19);

Electronics: DAE3 Sn536;

**Cheek Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.976 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.70 V/m; Power Drift = 0.059 dB

Peak SAR (extrapolated) = 1.31 W/kg

**SAR(1 g) = 0.928 mW/g; SAR(10 g) = 0.628 mW/g**

Maximum value of SAR (measured) = 1.00 mW/g

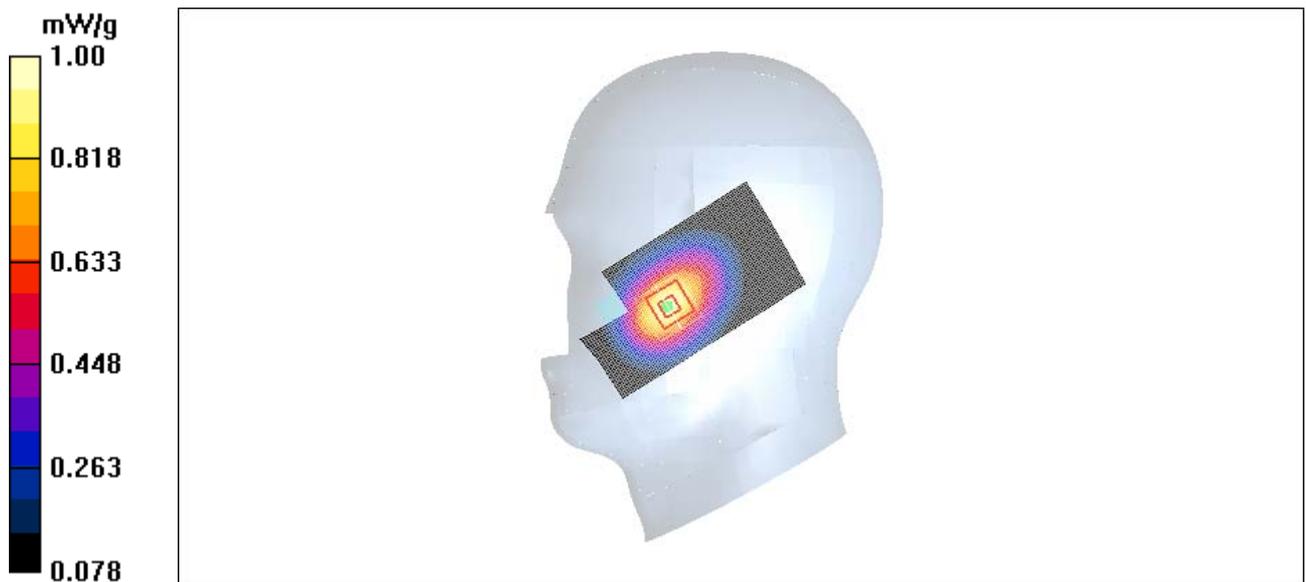


Figure 22 Right Hand Touch Cheek GSM 850 Channel 190

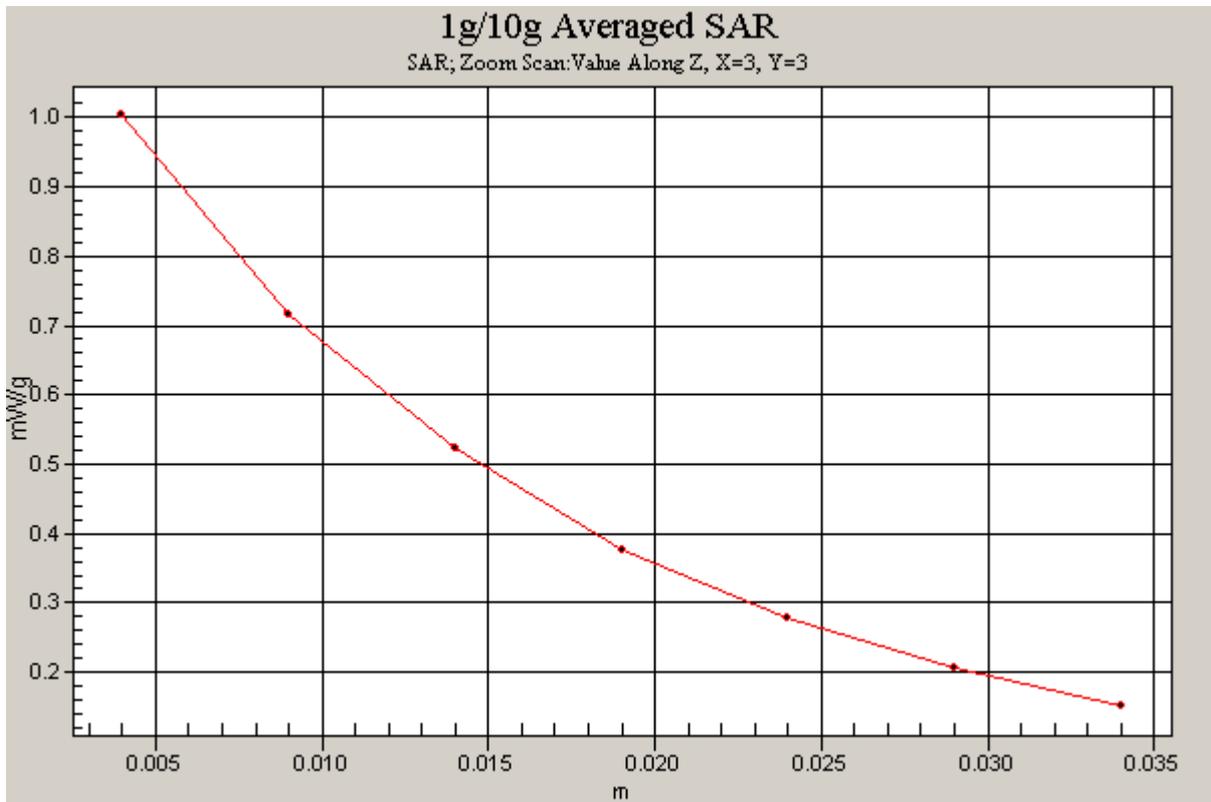


Figure 23 Z-Scan at power reference point (Right Hand Touch Cheek GSM 850 Channel 190)

**GSM 850 Right Cheek Low**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 42.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.19, 9.19, 9.19);

Electronics: DAE3 Sn536;

**Cheek Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.644 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.95 V/m; Power Drift = 0.081 dB

Peak SAR (extrapolated) = 0.872 W/kg

**SAR(1 g) = 0.607 mW/g; SAR(10 g) = 0.411 mW/g**

Maximum value of SAR (measured) = 0.654 mW/g

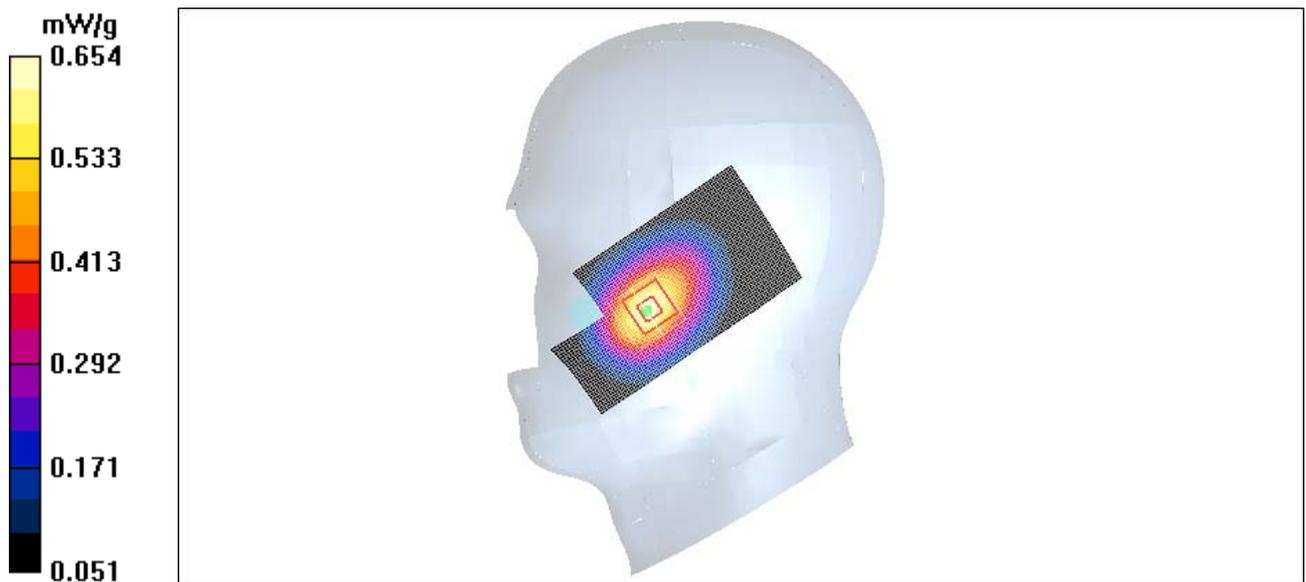


Figure 24 Right Hand Touch Cheek GSM 850 Channel 128

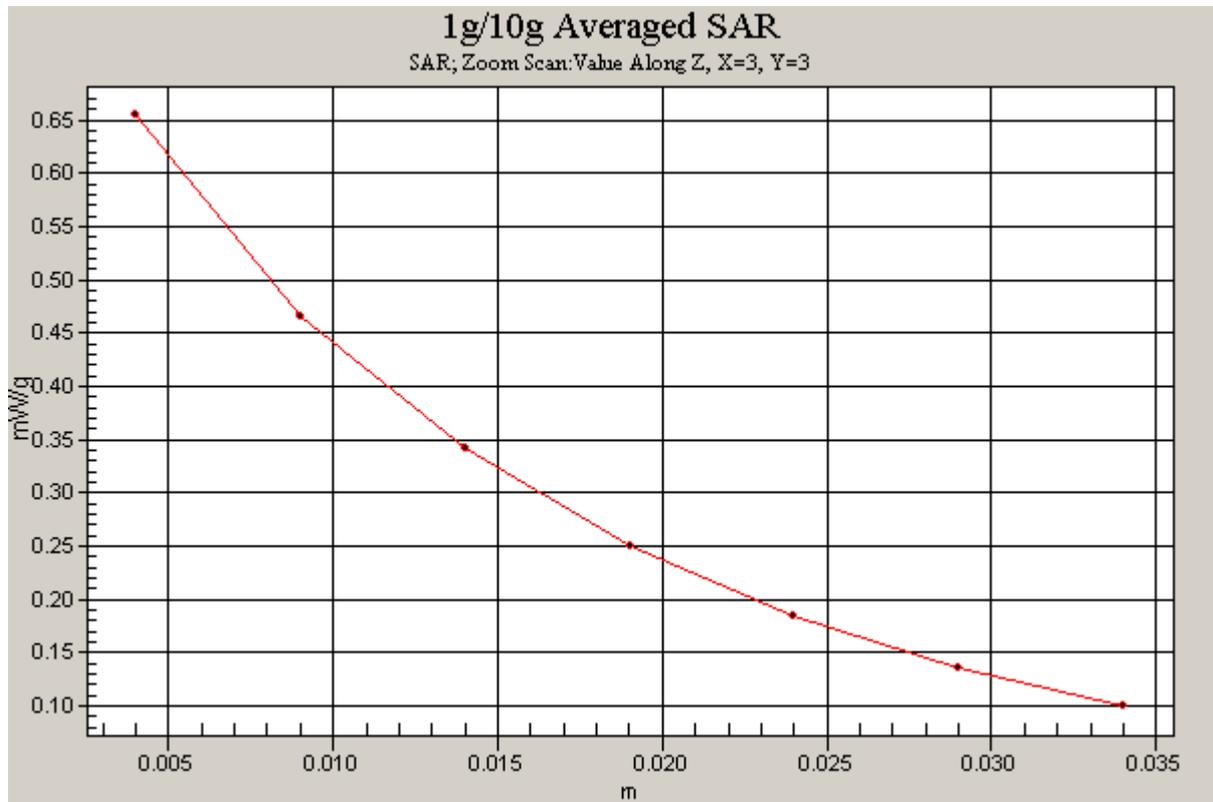


Figure 25 Z-Scan at power reference point (Right Hand Touch Cheek GSM 850 Channel 128)

### GSM 850 Right Tilt High

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.94$  mho/m;  $\epsilon_r = 42.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.19, 9.19, 9.19);

Electronics: DAE3 Sn536;

**Tilt High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.495 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.3 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.628 W/kg

**SAR(1 g) = 0.470 mW/g; SAR(10 g) = 0.337 mW/g**

Maximum value of SAR (measured) = 0.498 mW/g

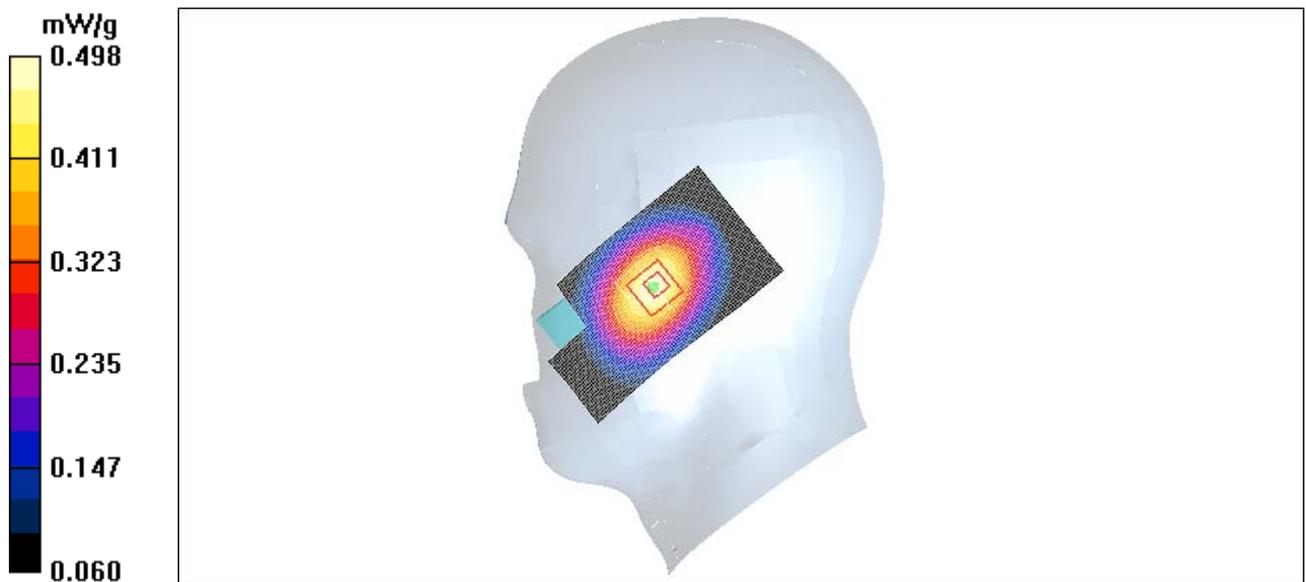


Figure 26 Right Hand Tilt 15 ° GSM 850 Channel 251

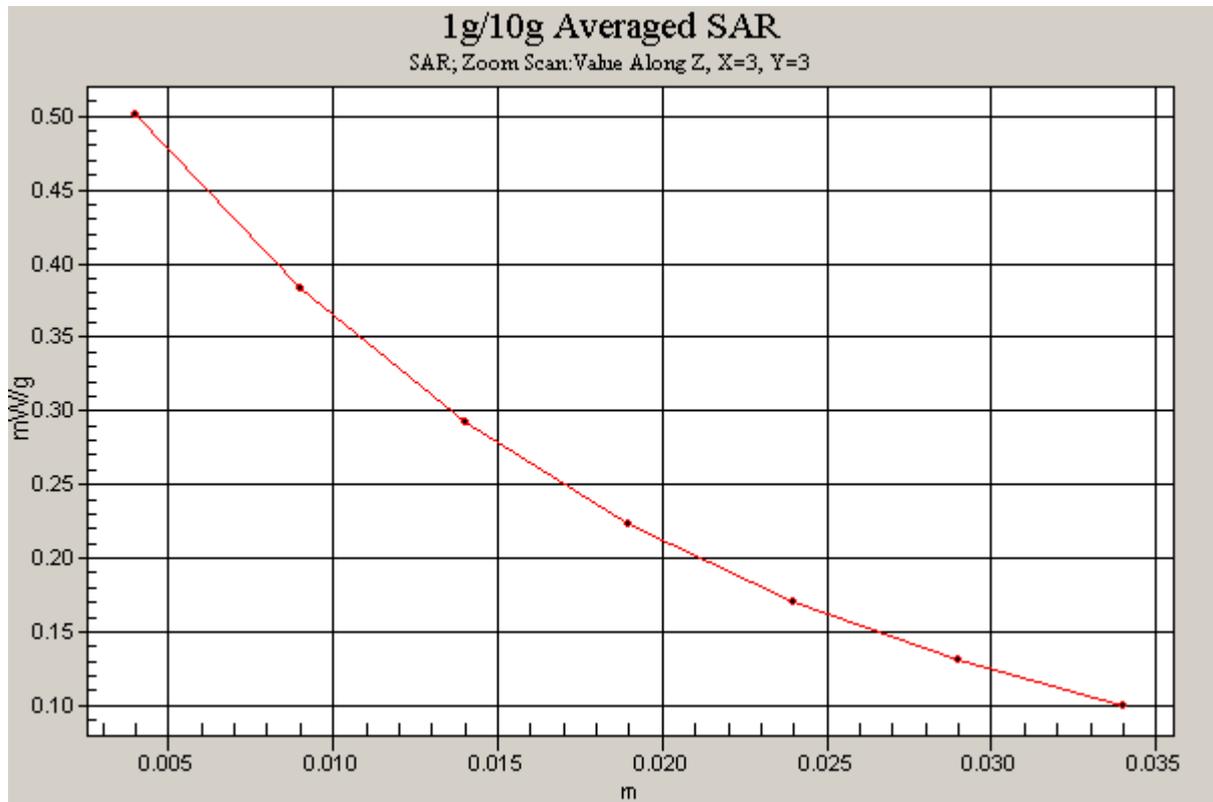


Figure 27 Z-Scan at power reference point (Right Hand Tilt 15 ° GSM 850 Channel 251)

### GSM 850 Right Tilt Middle

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.928$  mho/m;  $\epsilon_r = 42.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.19, 9.19, 9.19);

Electronics: DAE3 Sn536;

**Tilt Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.446 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.550 W/kg

**SAR(1 g) = 0.421 mW/g; SAR(10 g) = 0.306 mW/g**

Maximum value of SAR (measured) = 0.443 mW/g

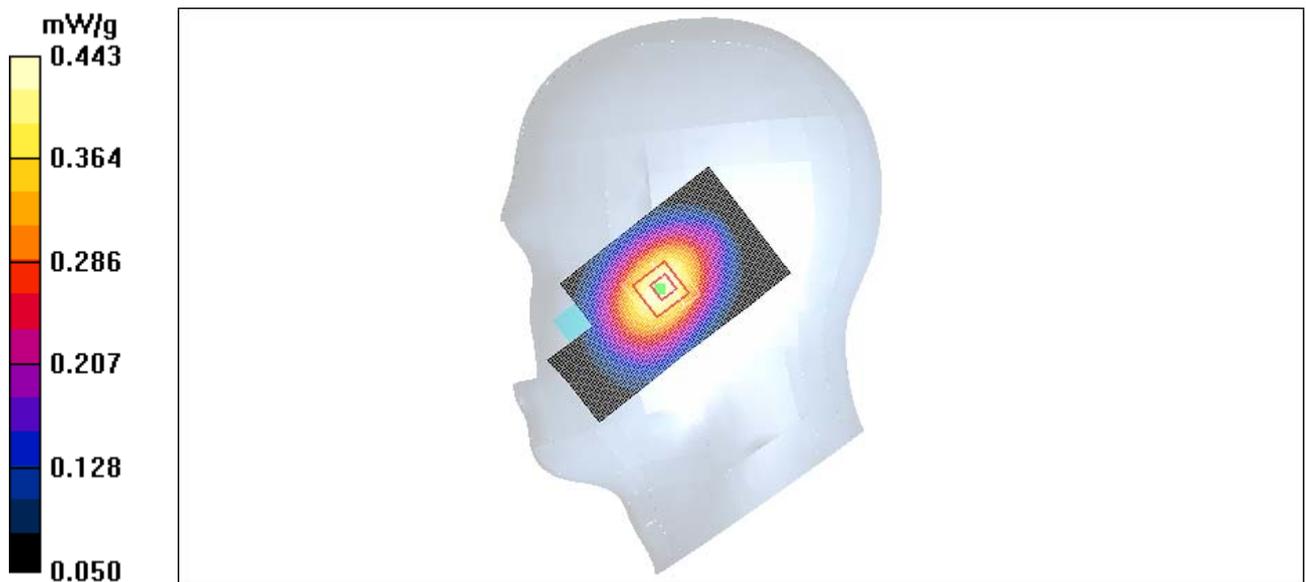


Figure 28 Right Hand Tilt 15 ° GSM 850 Channel 190

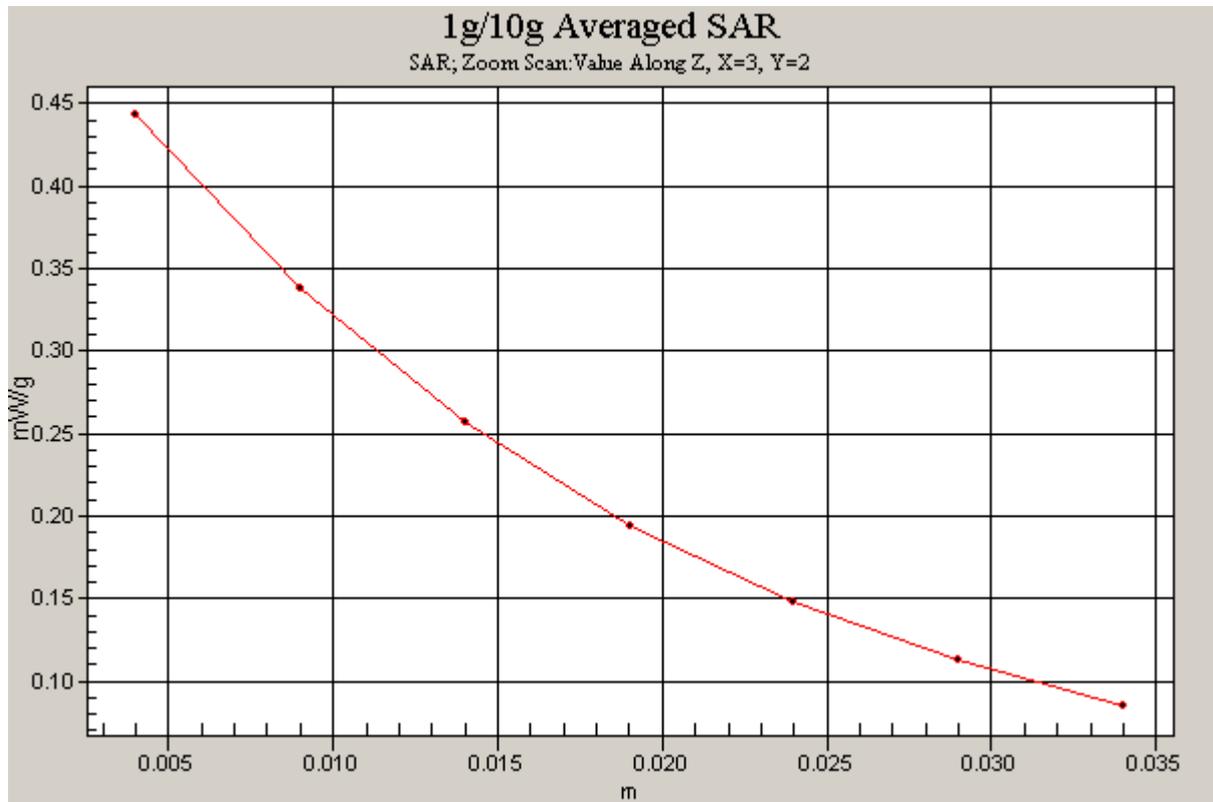


Figure 29 Z-Scan at power reference point (Right Hand Tilt 15 ° GSM 850 Channel 190)

### GSM 850 Right Tilt Low

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 42.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.19, 9.19, 9.19);

Electronics: DAE3 Sn536;

**Tilt Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.306 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.380 W/kg

**SAR(1 g) = 0.288 mW/g; SAR(10 g) = 0.209 mW/g**

Maximum value of SAR (measured) = 0.304 mW/g

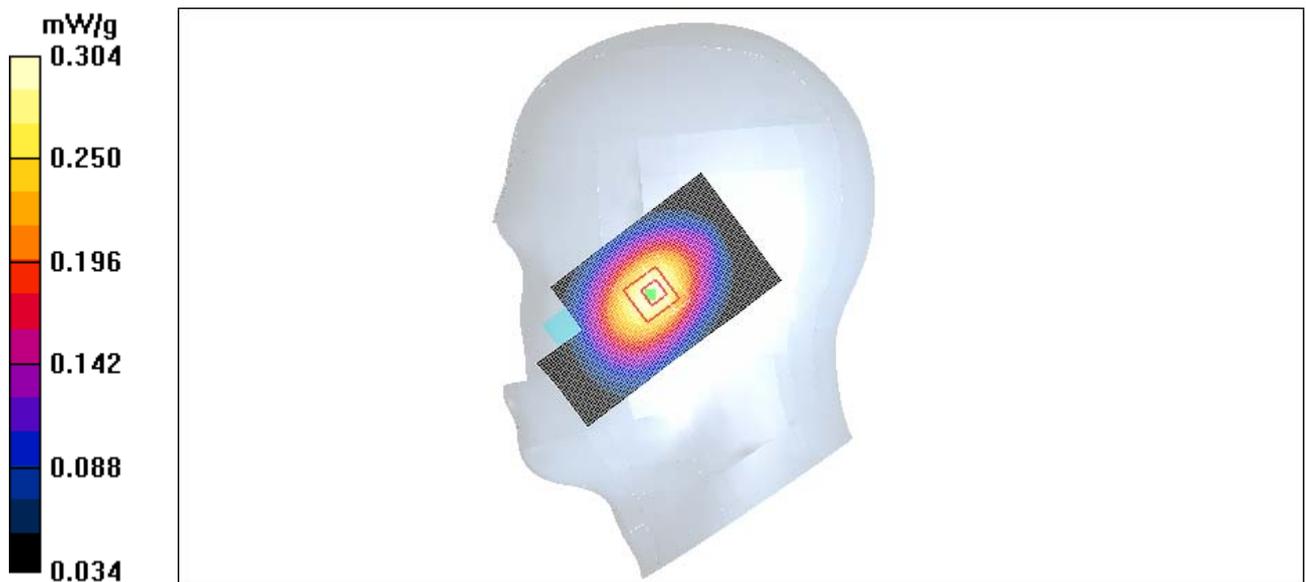


Figure 30 Right Hand Tilt 15 ° GSM 850 Channel 128

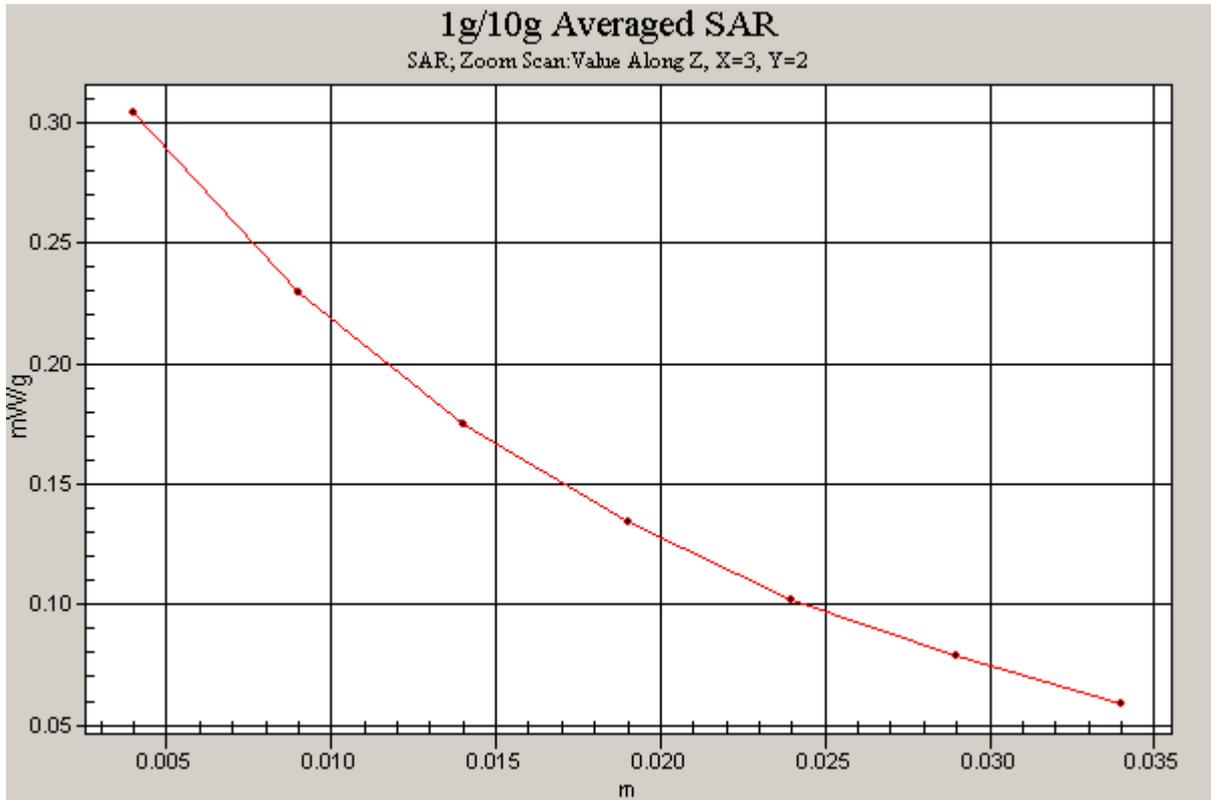


Figure 31 Z-Scan at power reference point (Right Hand Tilt 15 ° GSM 850 Channel 128)

### GSM 850 Towards Ground High

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.998$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);

Electronics: DAE3 Sn536;

**Towards Ground High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.553 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.698 W/kg

**SAR(1 g) = 0.521 mW/g; SAR(10 g) = 0.371 mW/g**

Maximum value of SAR (measured) = 0.554 mW/g

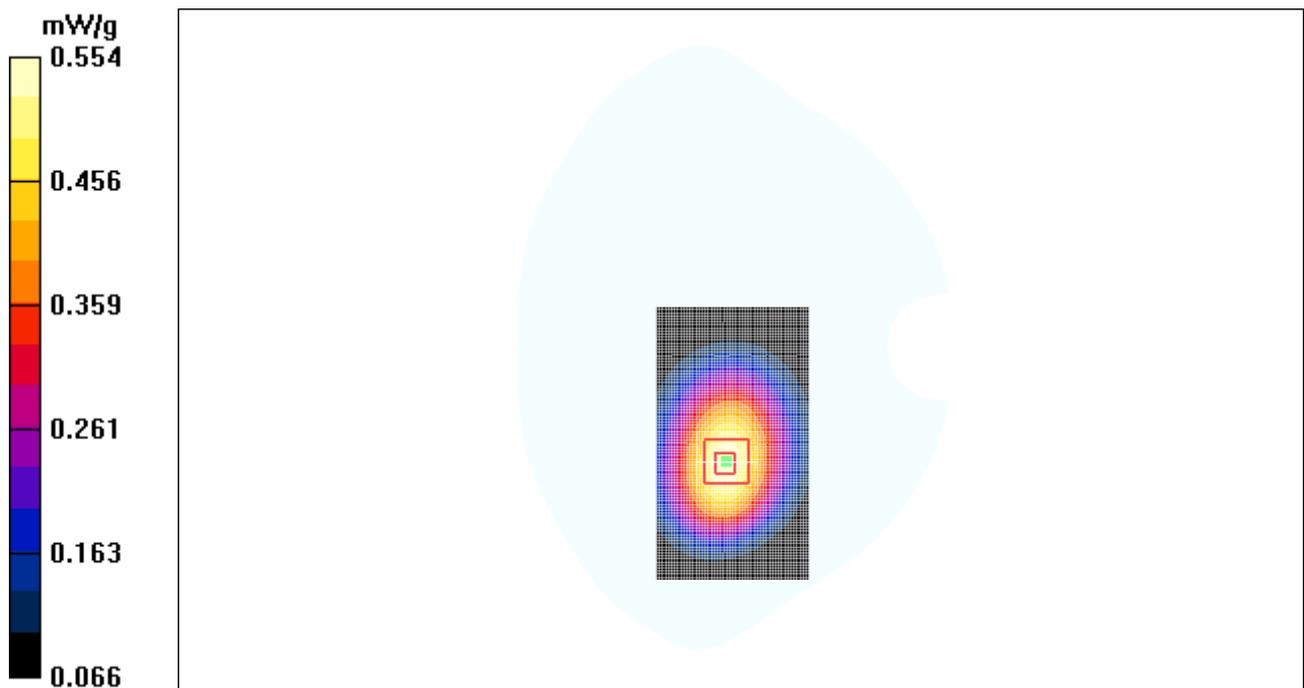


Figure 32 Body, Towards Ground, GSM 850 Channel 251

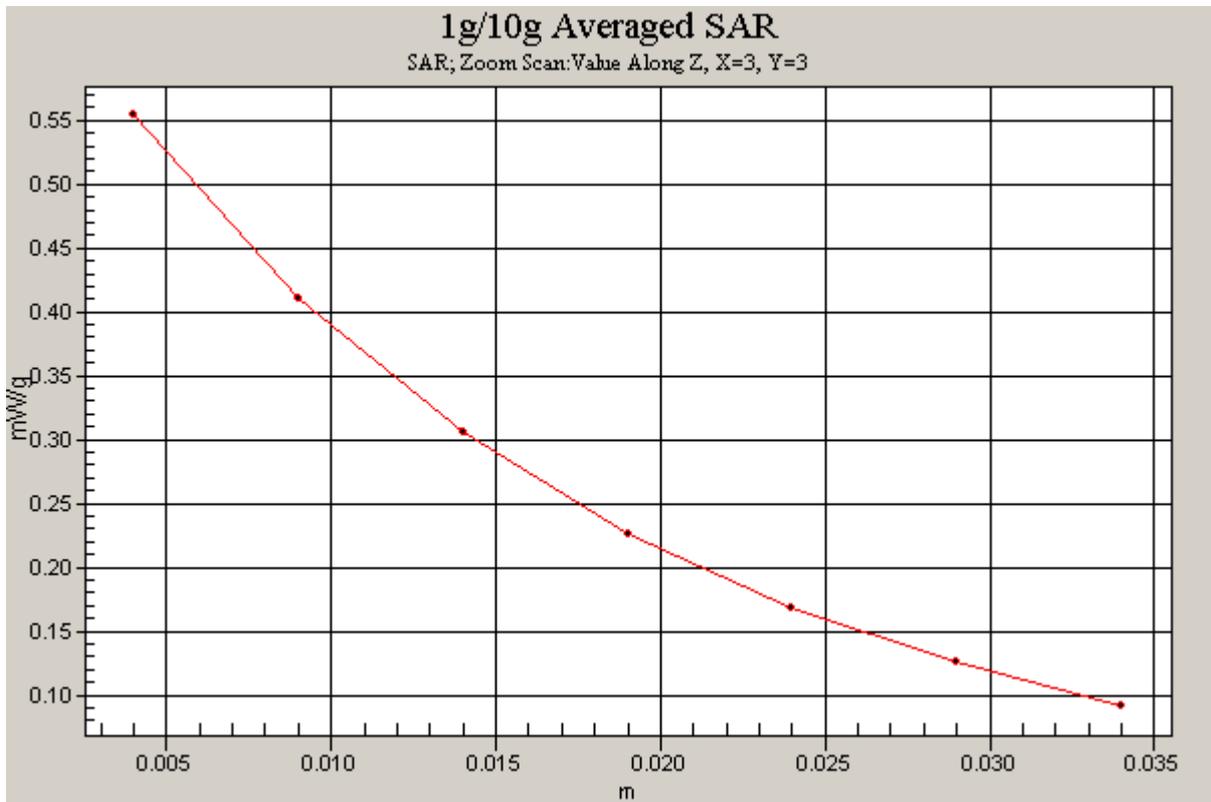


Figure 33 Z-Scan at power reference point (Body, Towards Ground, GSM 850 Channel 251)

**GSM 850 Towards Ground Middle**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.986$  mho/m;  $\epsilon_r = 55.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);

Electronics: DAE3 Sn536;

**Towards Ground Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.599 mW/g

**Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.758 W/kg

**SAR(1 g) = 0.570 mW/g; SAR(10 g) = 0.408 mW/g**

Maximum value of SAR (measured) = 0.603 mW/g

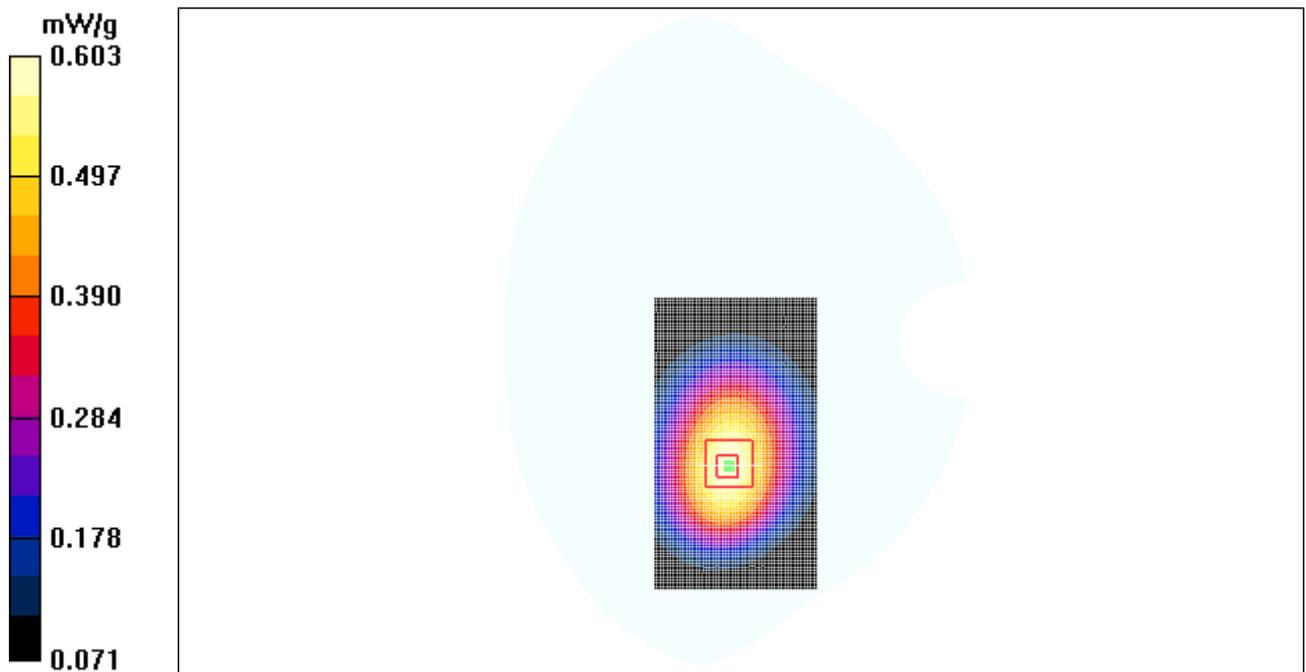


Figure 34 Body, Towards Ground, GSM 850 Channel 190

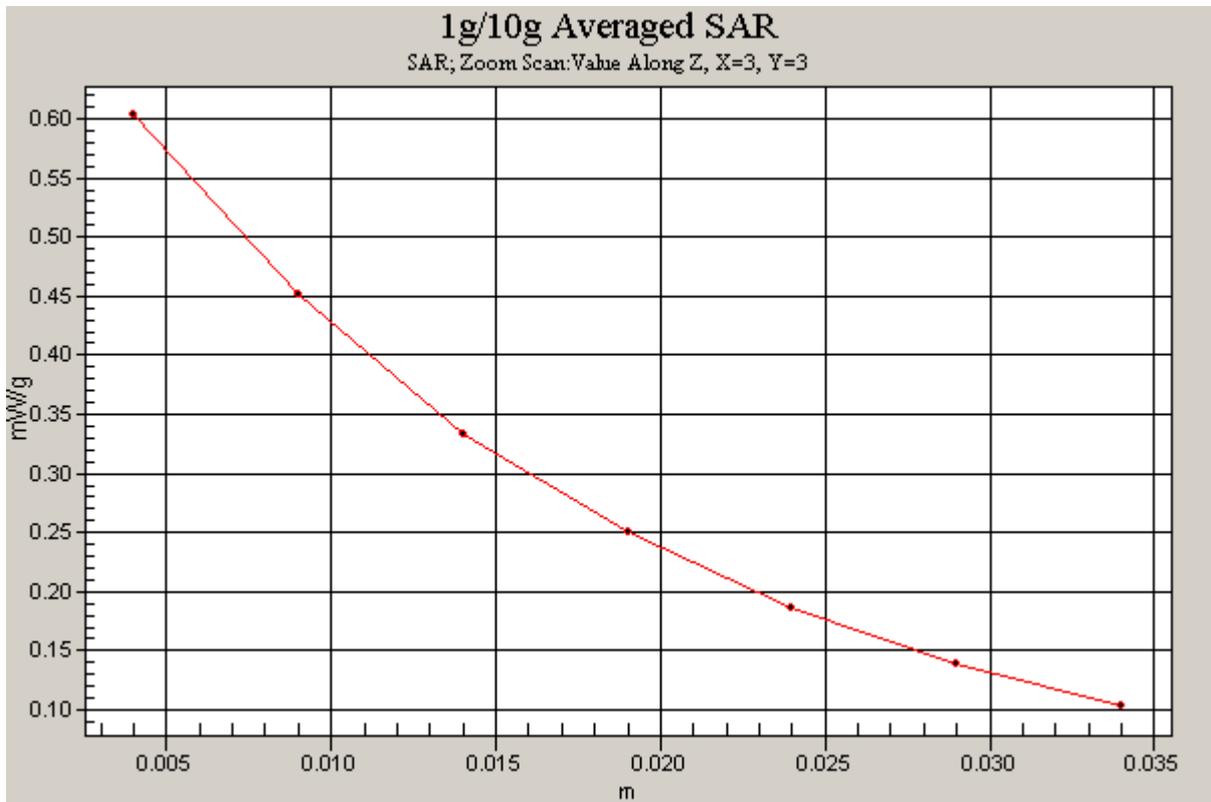


Figure 35 Z-Scan at power reference point (Body, Towards Ground, GSM 850 Channel 190)

### GSM 850 Towards Ground Low

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.972$  mho/m;  $\epsilon_r = 55.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);

Electronics: DAE3 Sn536;

**Towards Ground Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.451 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.85 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 0.576 W/kg

**SAR(1 g) = 0.428 mW/g; SAR(10 g) = 0.306 mW/g**

Maximum value of SAR (measured) = 0.452 mW/g

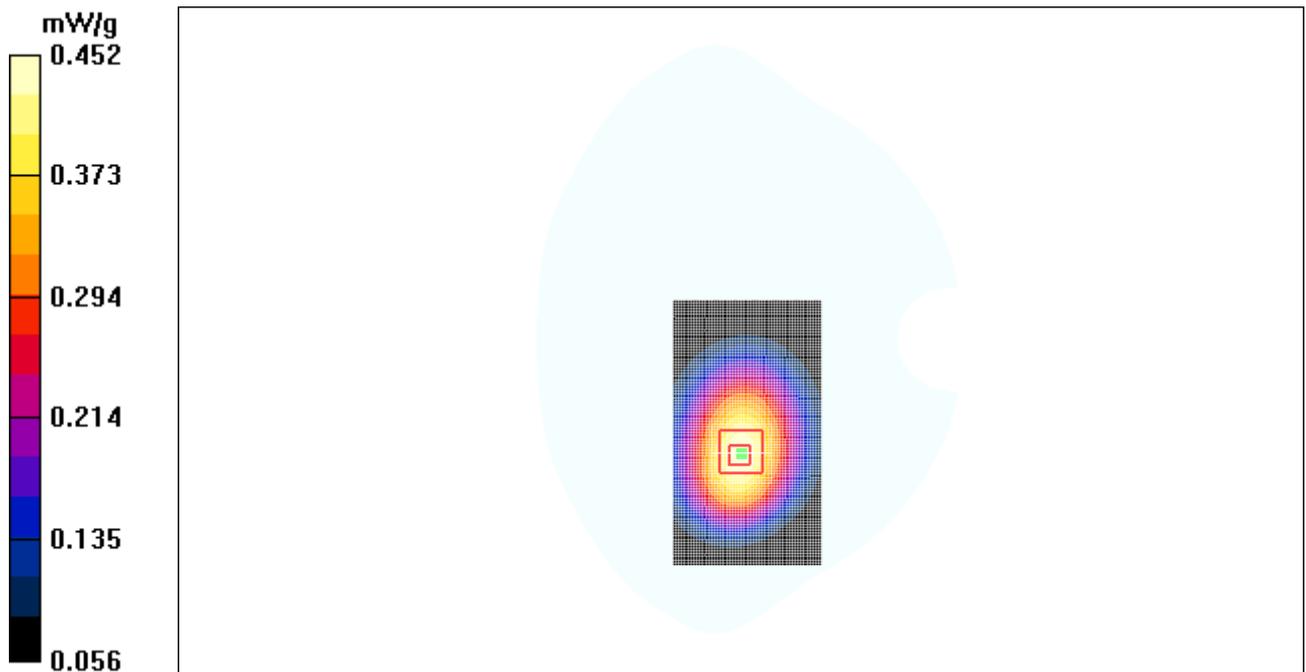


Figure 36 Body, Towards Ground, GSM 850 Channel 128

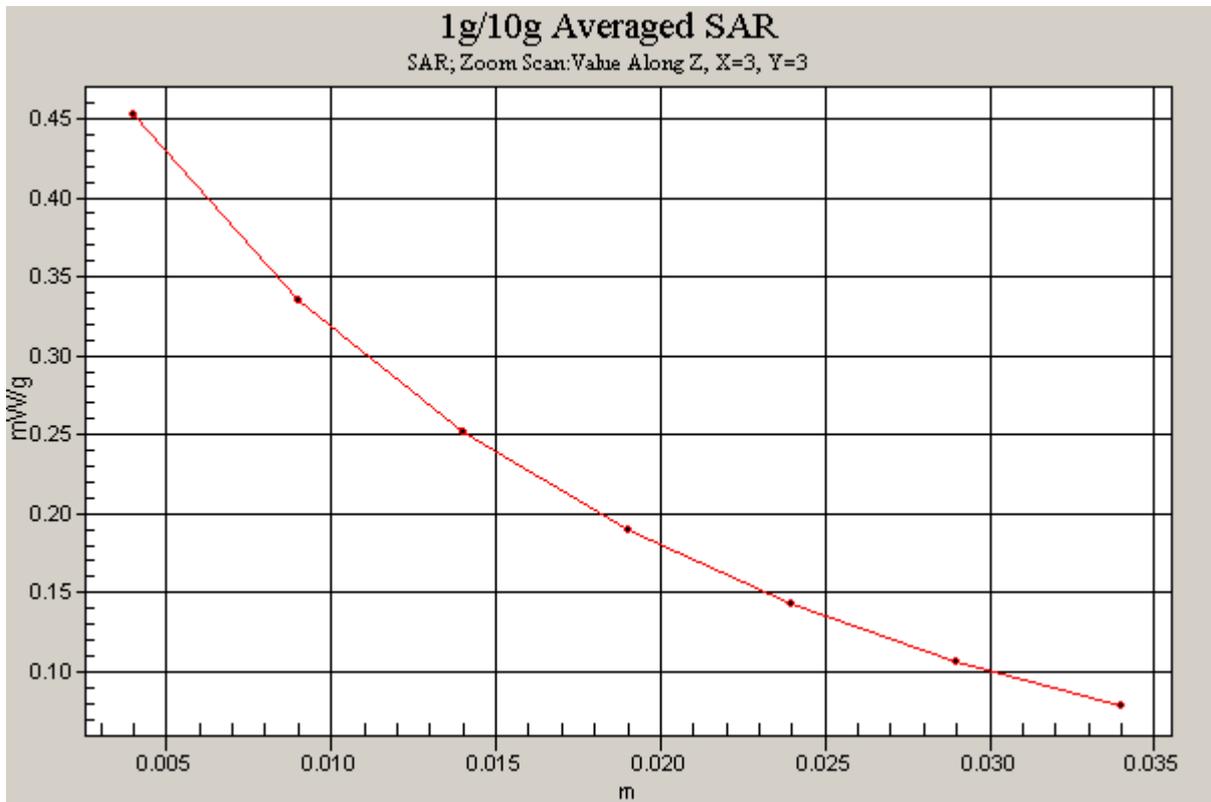


Figure 37 Z-Scan at power reference point (Body, Towards Ground, GSM 850 Channel 128)

### GSM 850 Towards Phantom High

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.998$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);

Electronics: DAE3 Sn536;

**Towards Phantom High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.502 mW/g

**Towards Phantom High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.642 W/kg

**SAR(1 g) = 0.476 mW/g; SAR(10 g) = 0.339 mW/g**

Maximum value of SAR (measured) = 0.507 mW/g

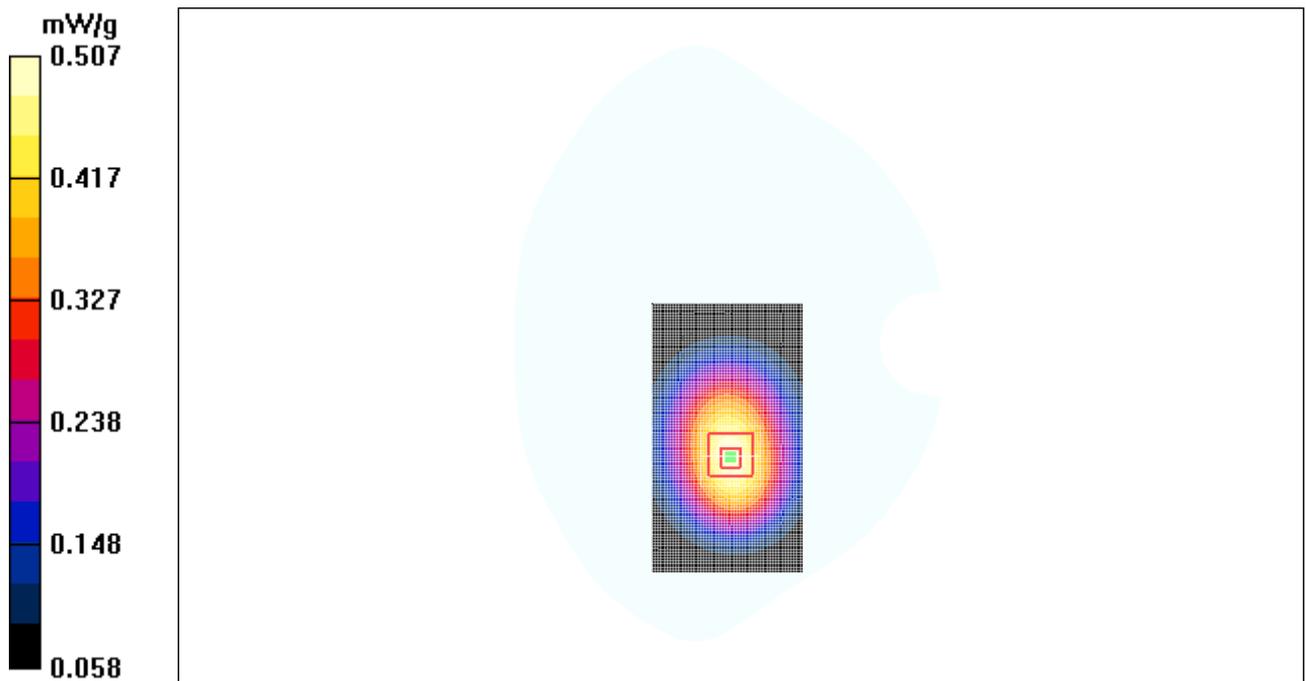


Figure 38 Body, Towards Phantom, GSM 850 Channel 251

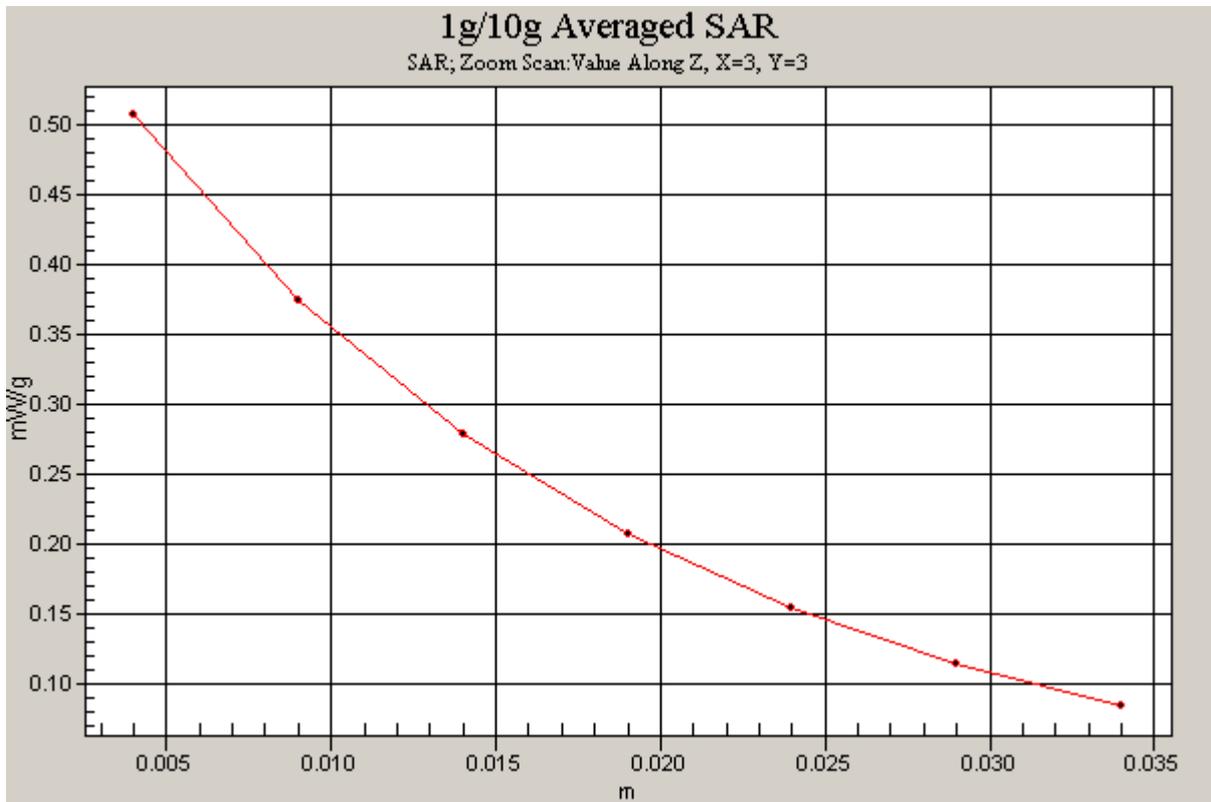


Figure 39 Z-Scan at power reference point (Body, Towards Phantom, GSM 850 Channel 251)

### GSM 850 Towards Phantom Middle

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.986$  mho/m;  $\epsilon_r = 55.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);

Electronics: DAE3 Sn536;

**Towards Phantom Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.538 mW/g

**Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.682 W/kg

**SAR(1 g) = 0.507 mW/g; SAR(10 g) = 0.363 mW/g**

Maximum value of SAR (measured) = 0.541 mW/g

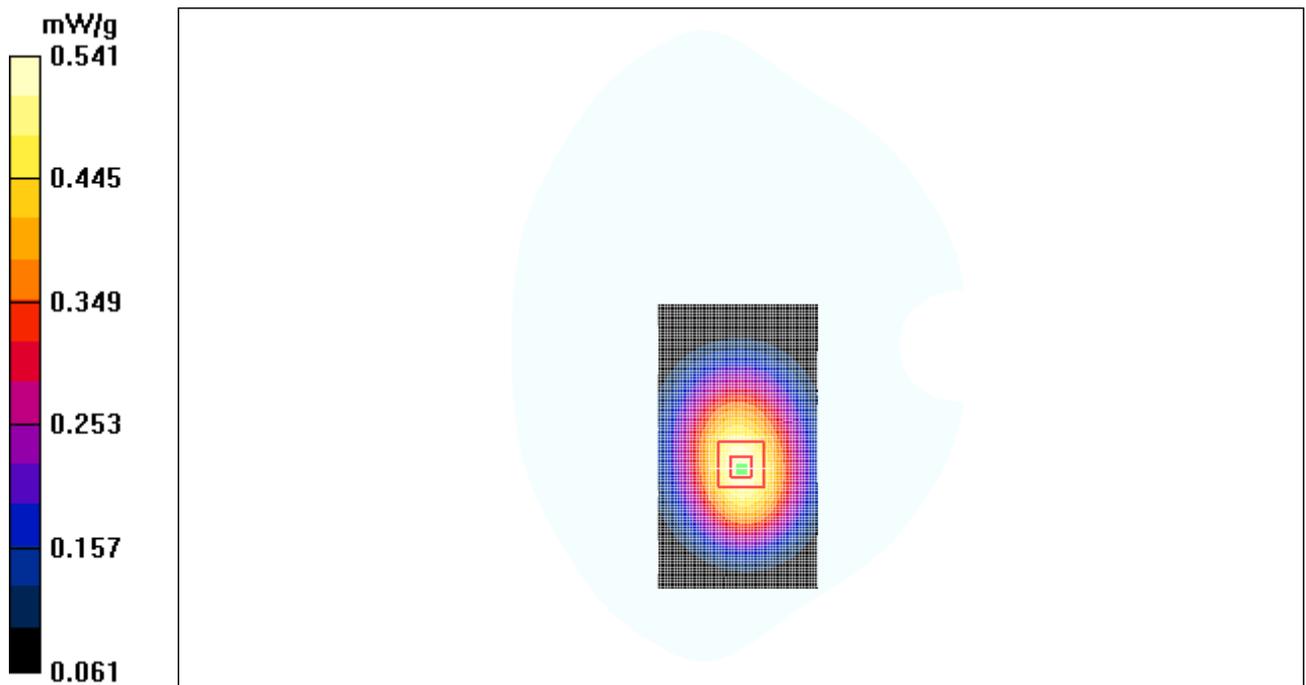


Figure 40 Body, Towards Phantom, GSM 850 Channel 190

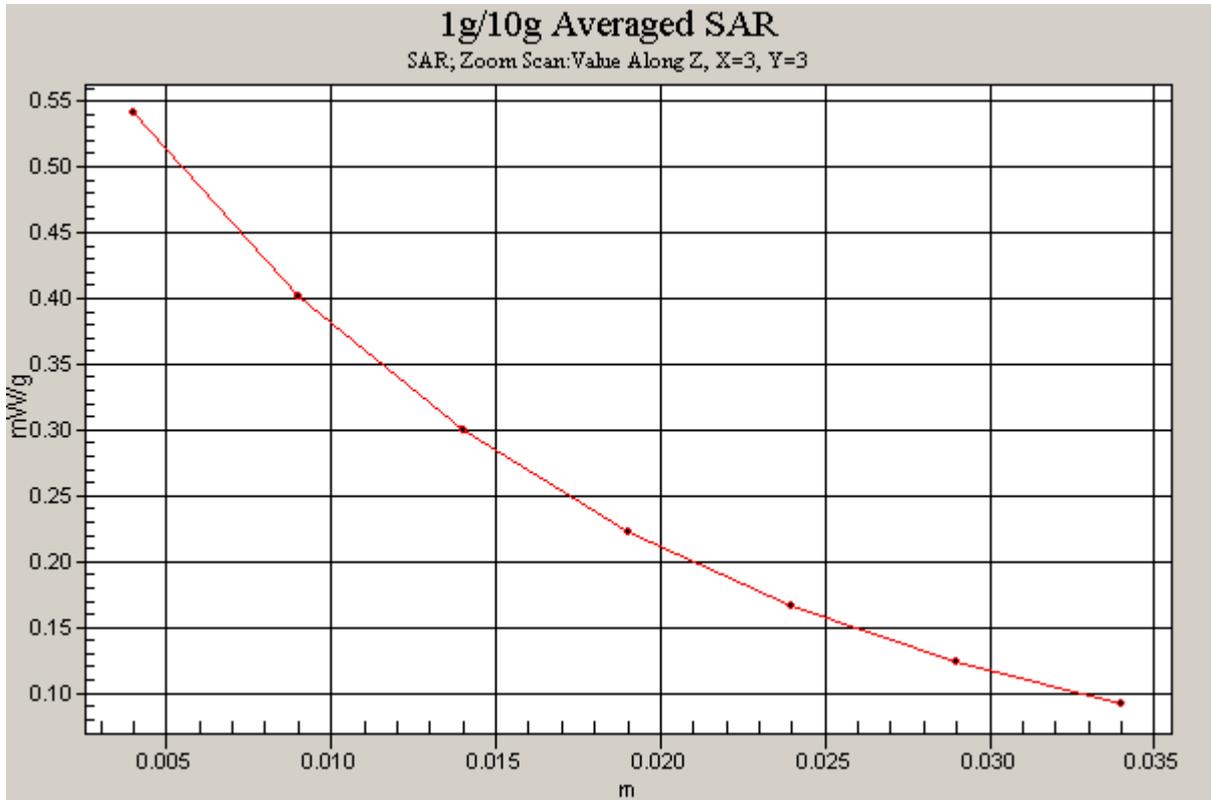


Figure 41 Z-Scan at power reference point (Body, Towards Phantom, GSM 850 Channel 190)

**GSM 850 Towards Phantom Low**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.972$  mho/m;  $\epsilon_r = 55.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);

Electronics: DAE3 Sn536;

**Towards Phantom Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.393 mW/g

**Towards Phantom Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.29 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.498 W/kg

**SAR(1 g) = 0.370 mW/g; SAR(10 g) = 0.266 mW/g**

Maximum value of SAR (measured) = 0.393 mW/g

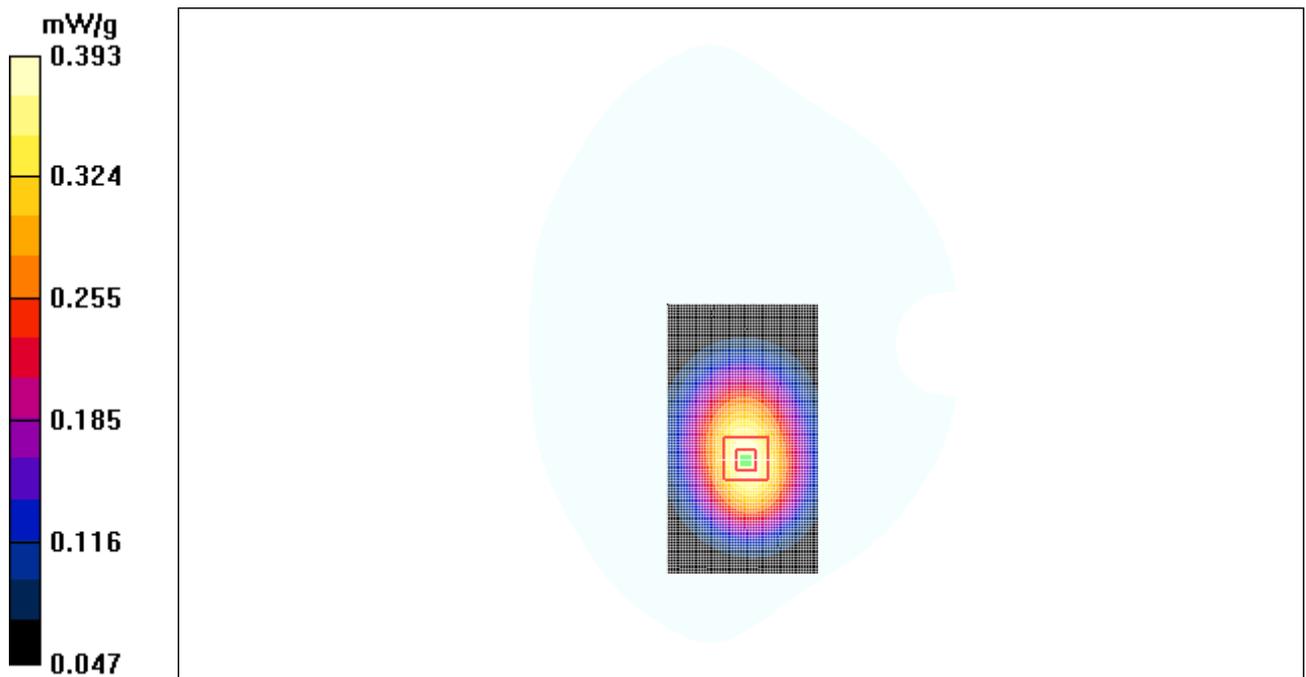


Figure 42 Body, Towards Phantom, GSM 850 Channel 128

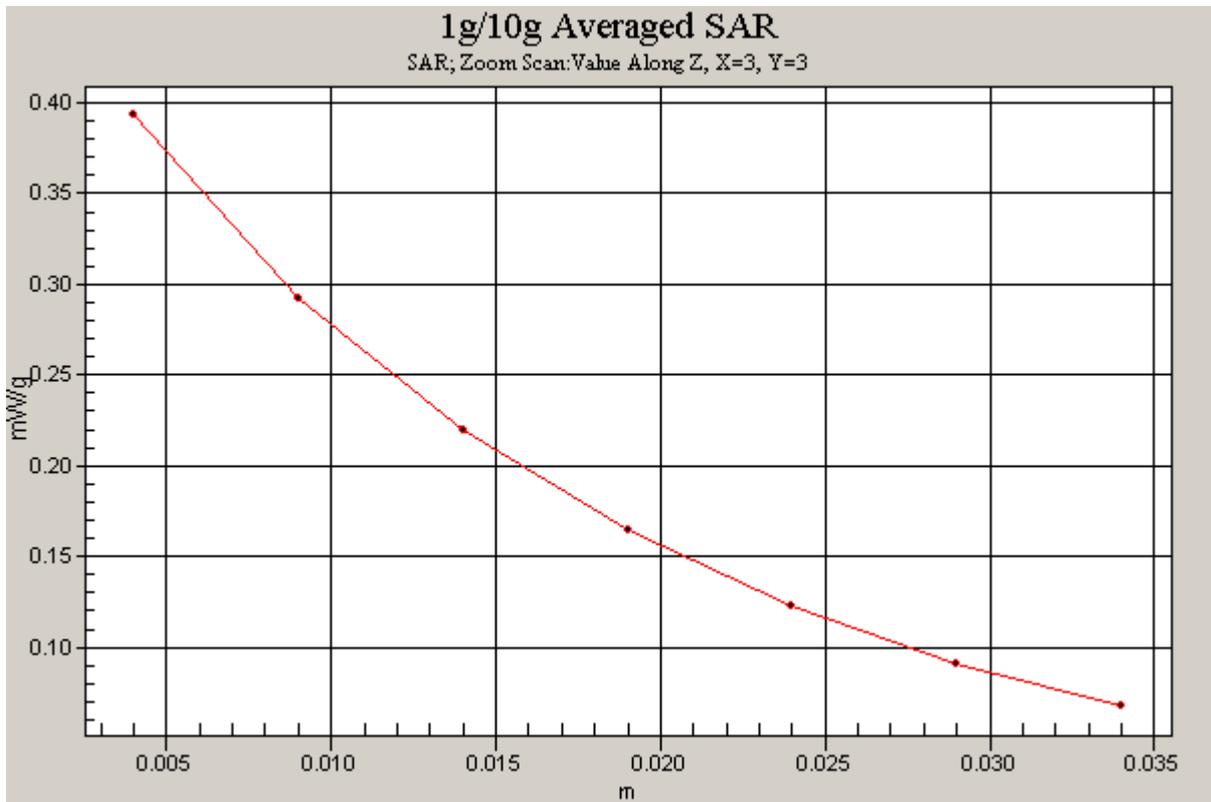


Figure 43 Z-Scan at power reference point (Body, Towards Phantom, GSM 850, Channel 128)

**GSM 850 Earphone Towards Ground Middle**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.986$  mho/m;  $\epsilon_r = 55.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);

Electronics: DAE3 Sn536;

**Towards Ground Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.443 mW/g

**Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.547 W/kg

**SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.294 mW/g**

Maximum value of SAR (measured) = 0.435 mW/g

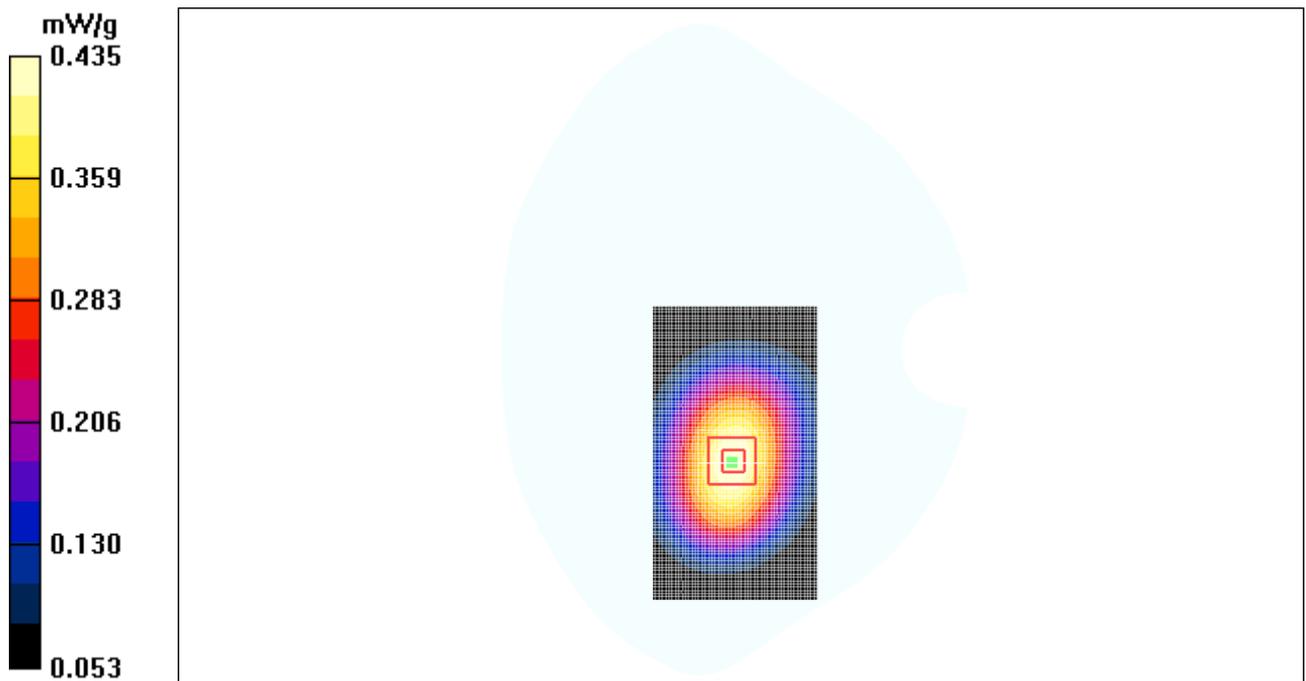


Figure 44 Body with Earphone, Towards Ground, GSM 850, Channel 190

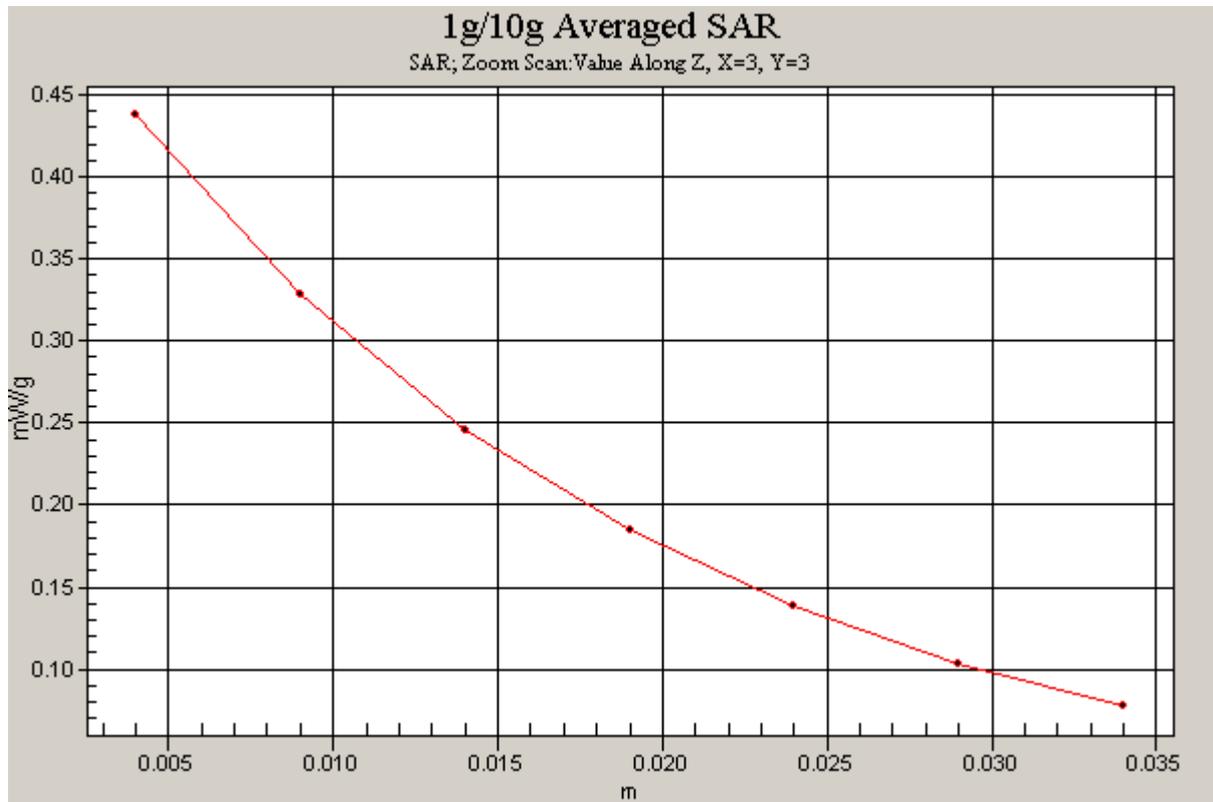


Figure 45 Z-Scan at power reference point (Body with Earphone, Towards Ground, GSM 850, Channel 190)

### GSM 850 GPRS Towards Ground High

Communication System: GSM850 + GPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.998$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);

Electronics: DAE3 Sn536;

**Towards Ground High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.06 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = 0.059 dB

Peak SAR (extrapolated) = 1.35 W/kg

**SAR(1 g) = 1 mW/g; SAR(10 g) = 0.715 mW/g**

Maximum value of SAR (measured) = 1.06 mW/g

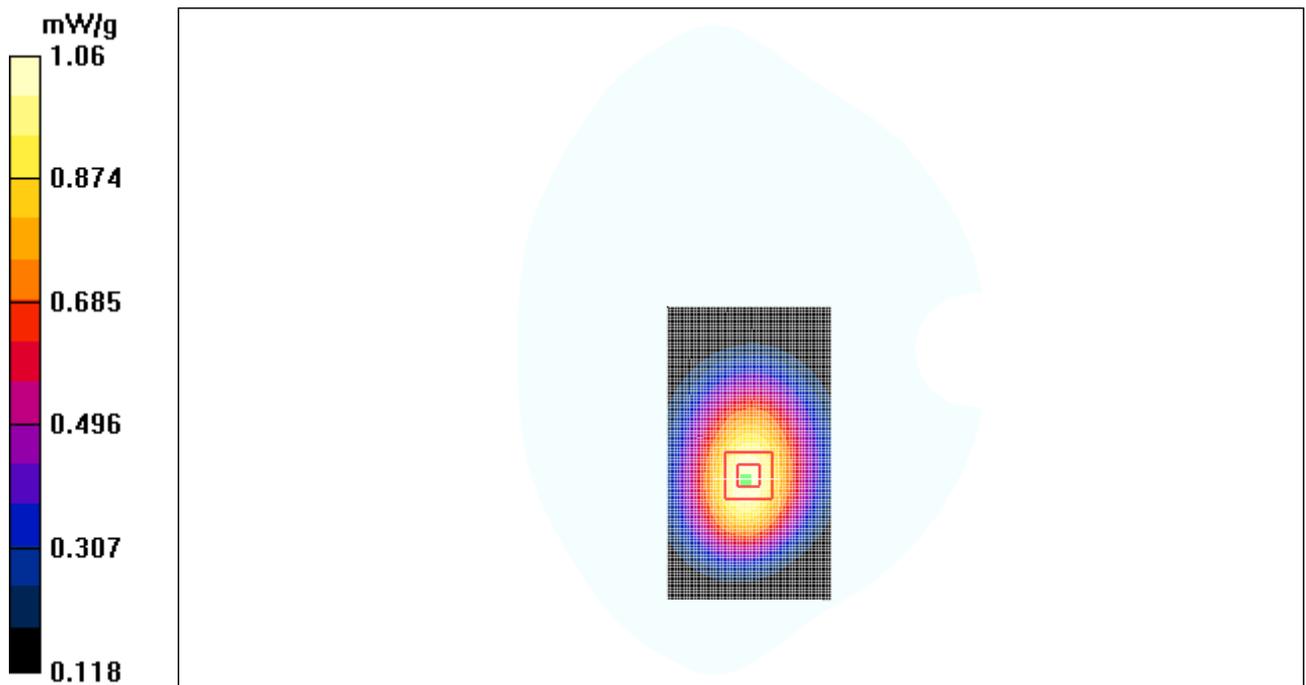


Figure 46 Body, Towards Ground, GSM 850 GPRS, Channel 251

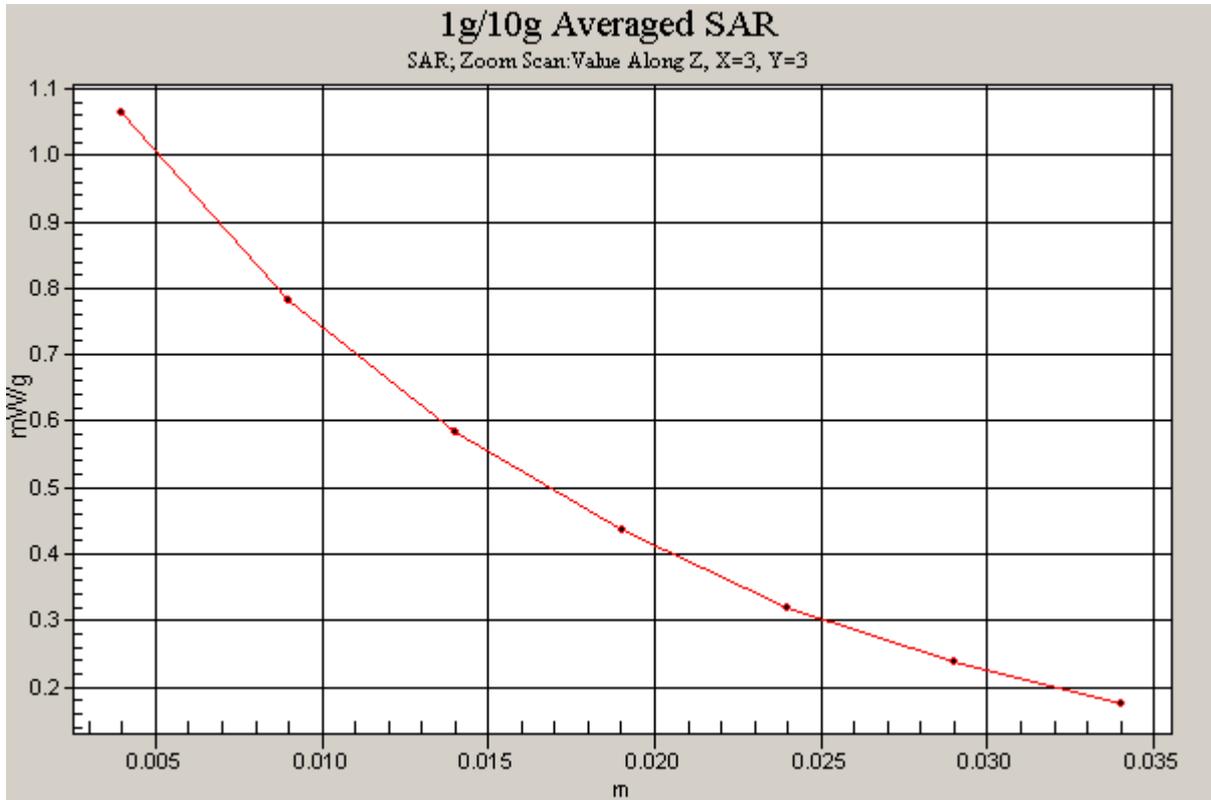


Figure 47 Z-Scan at power reference point (Body, Towards Ground, GSM 850 GPRS, Channel 251)

**GSM 850 GPRS Towards Ground Middle**

Communication System: GSM850 + GPRS(2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.986$  mho/m;  $\epsilon_r = 55.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);

Electronics: DAE3 Sn536;

**Towards Ground Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.17 mW/g

**Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 1.51 W/kg

**SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.794 mW/g**

Maximum value of SAR (measured) = 1.18 mW/g

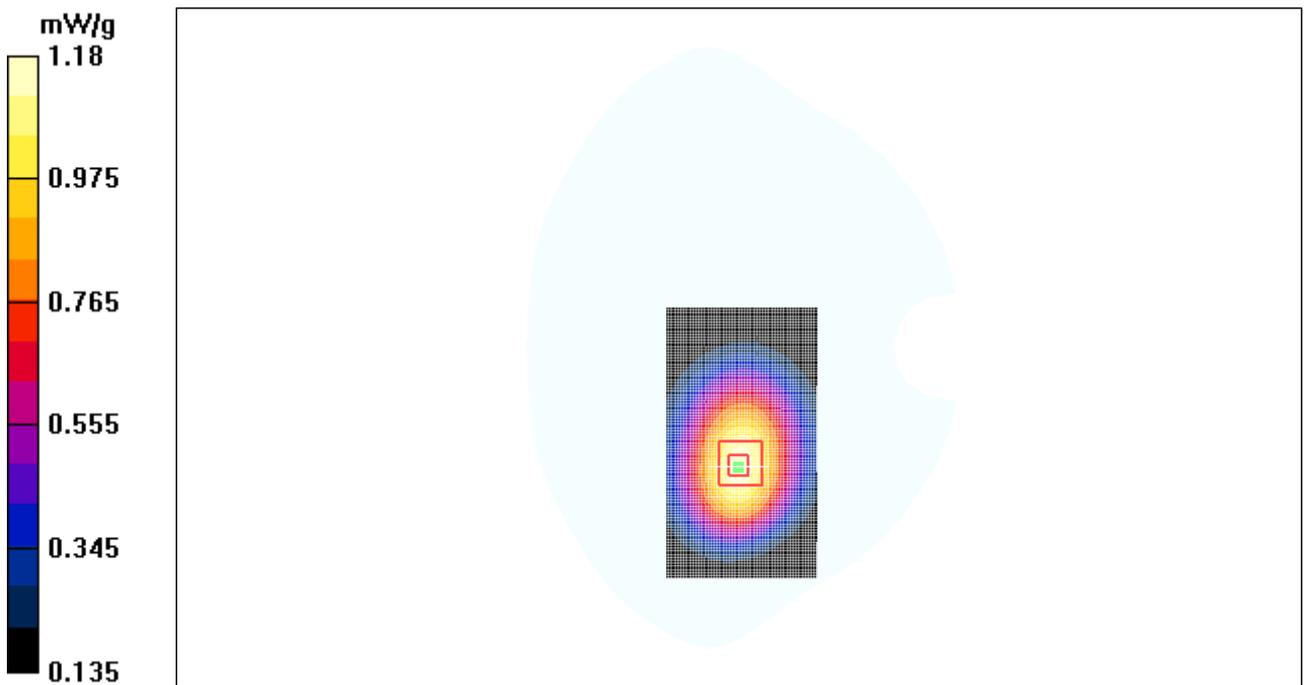


Figure 48 Body, Towards Ground, GSM 850 GPRS Channel 190

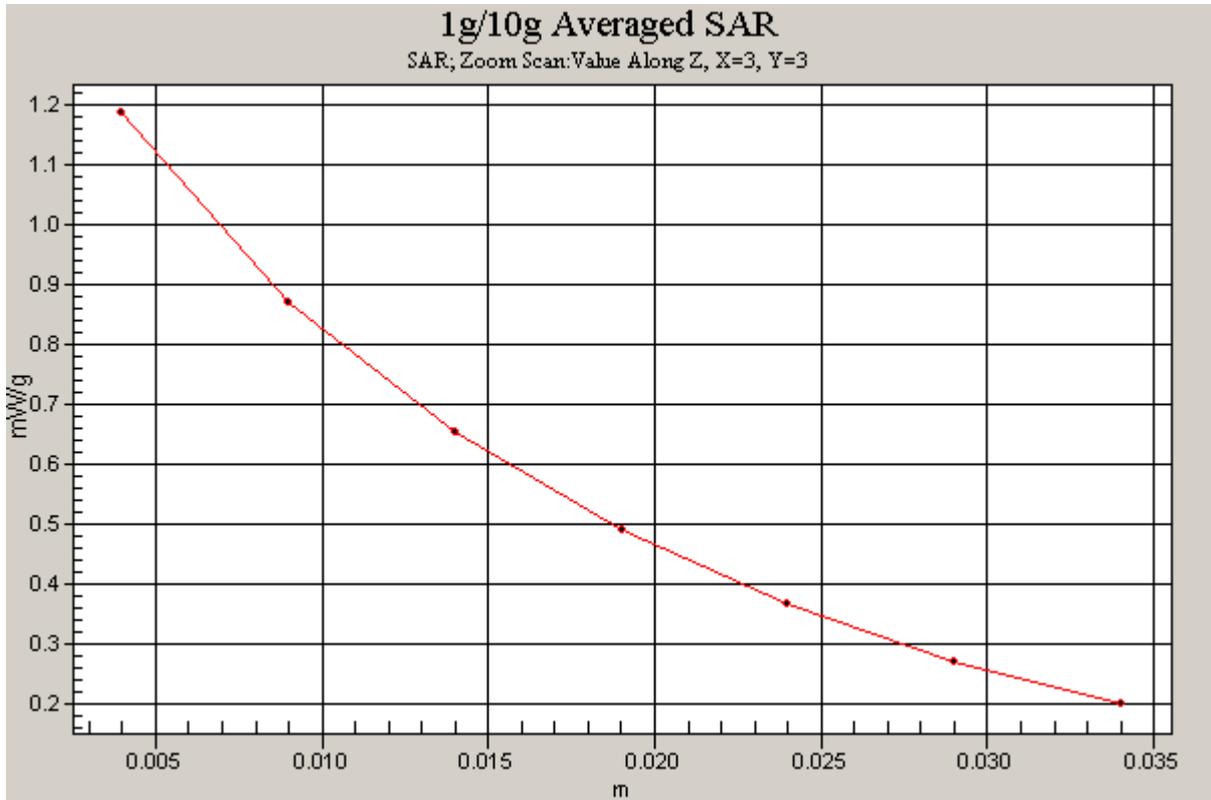


Figure 49 Z-Scan at power reference point (Body, Towards Ground, GSM 850 GPRS Channel 190)

**GSM 850 GPRS Towards Ground Low**

Communication System: GSM850 + GPRS(2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.972$  mho/m;  $\epsilon_r = 55.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);

Electronics: DAE3 Sn536;

**Towards Ground Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.941 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.9 V/m; Power Drift = 0.096 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.899 mW/g; SAR(10 g) = 0.644 mW/g**

Maximum value of SAR (measured) = 0.959 mW/g

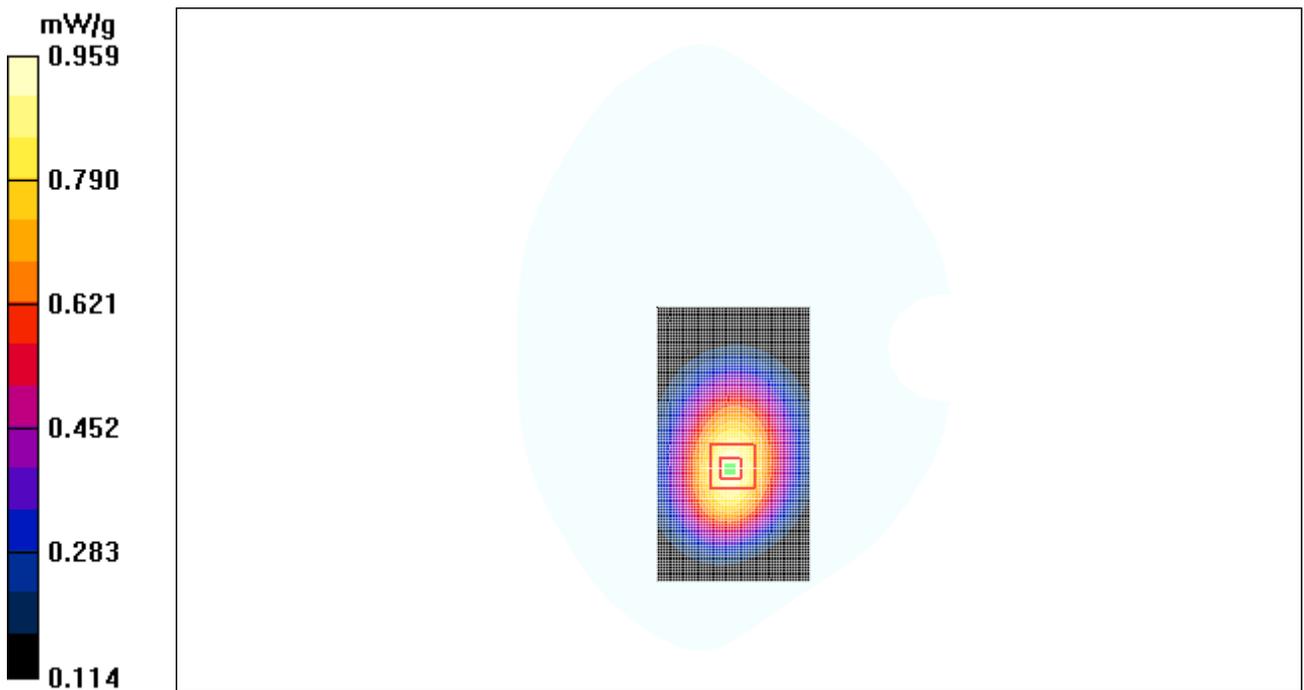


Figure 50 Body, Towards Ground, GSM 850 GPRS Channel 128

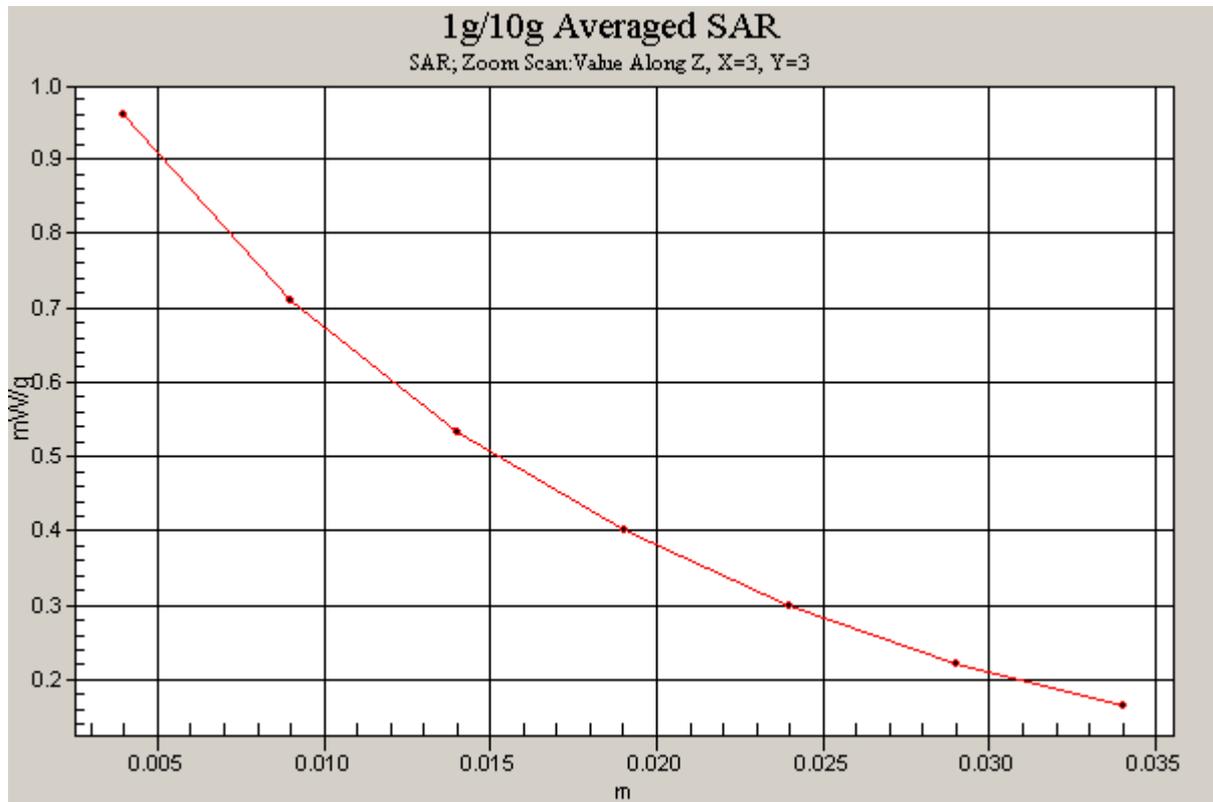


Figure 51 Z-Scan at power reference point (Body, Towards Ground, GSM 850 GPRS Channel 128)

### GSM 850 GPRS Towards Phantom High

Communication System: GSM850 + GPRS(2Up); Frequency: 848.8 MHz;Duty Cycle: 1:4

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.998$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);

Electronics: DAE3 Sn536;

**Towards Phantom High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.975 mW/g

**Towards Phantom High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.927 mW/g; SAR(10 g) = 0.662 mW/g**

Maximum value of SAR (measured) = 0.985 mW/g

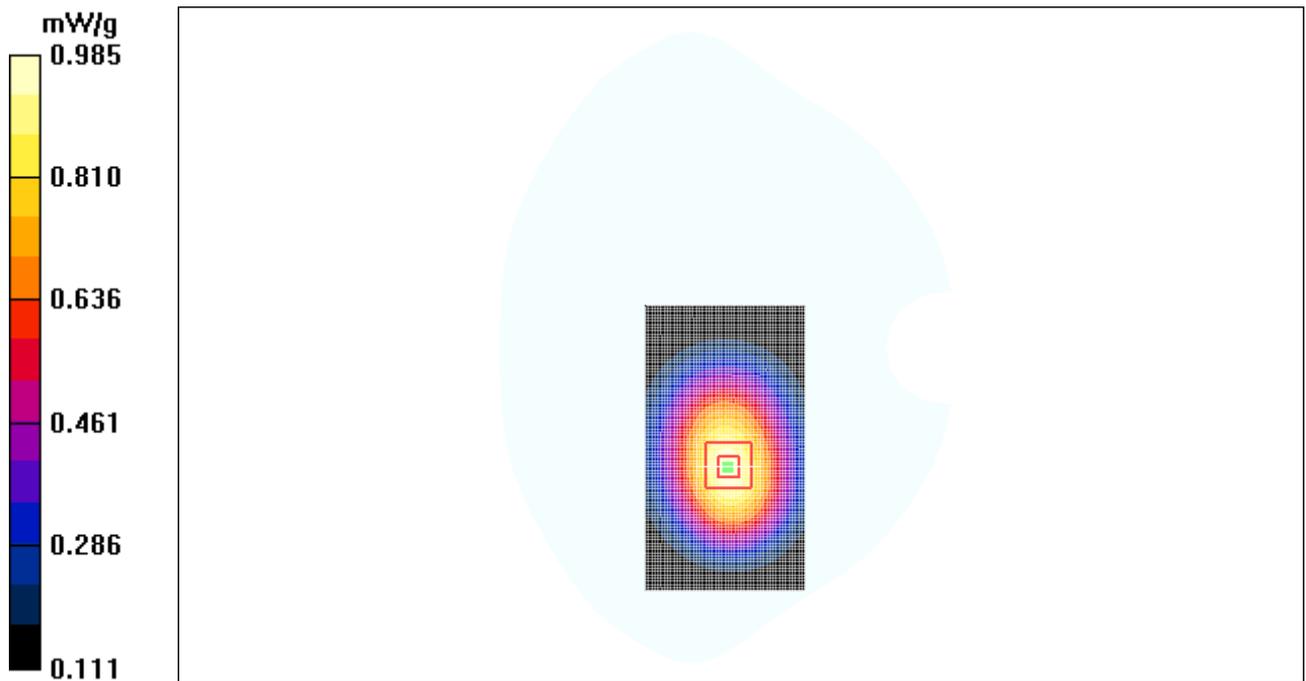


Figure 52 Body, Towards Phantom, GSM 850 GPRS, Channel 251

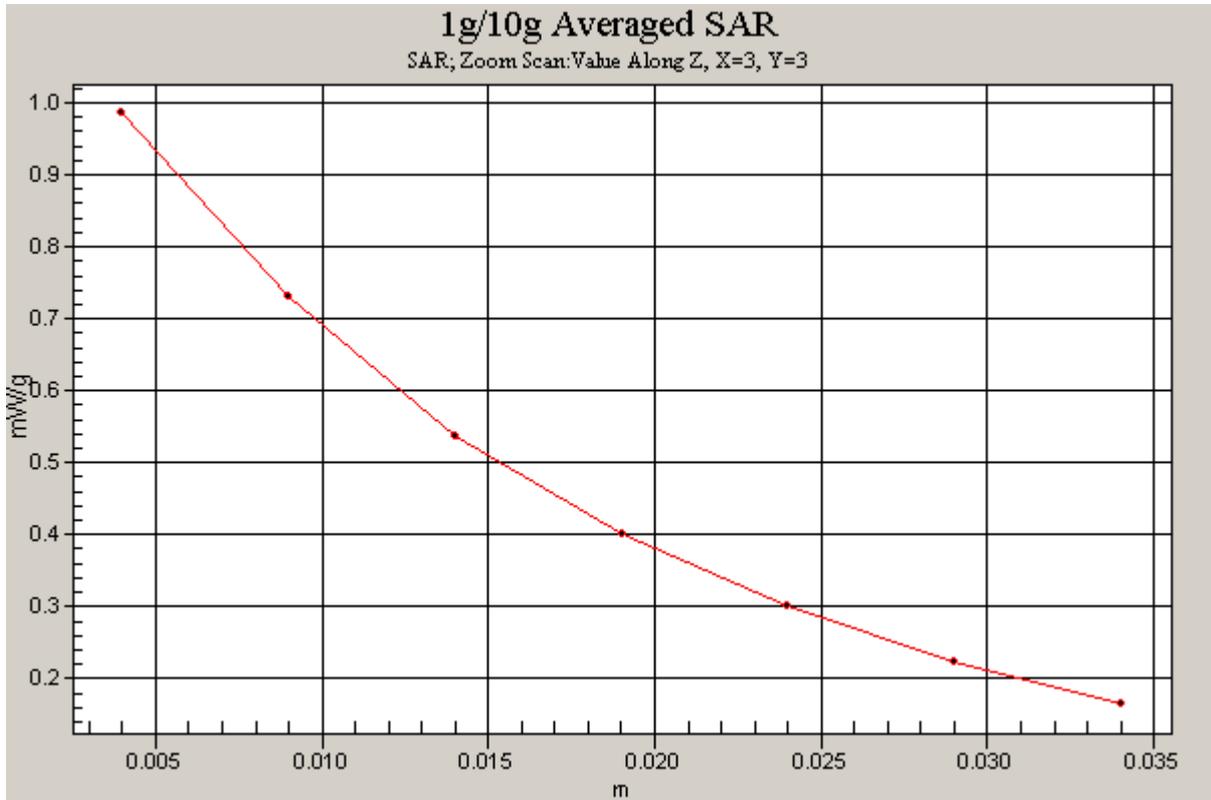


Figure 53 Z-Scan at power reference point (Body, Towards Phantom, GSM 850 GPRS, Channel 251)

**GSM 850 GPRS Towards Phantom Middle**

Communication System: GSM850 + GPRS(2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.986$  mho/m;  $\epsilon_r = 55.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);

Electronics: DAE3 Sn536;

**Towards Phantom Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.987 mW/g

**Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.929 mW/g; SAR(10 g) = 0.666 mW/g**

Maximum value of SAR (measured) = 0.986 mW/g

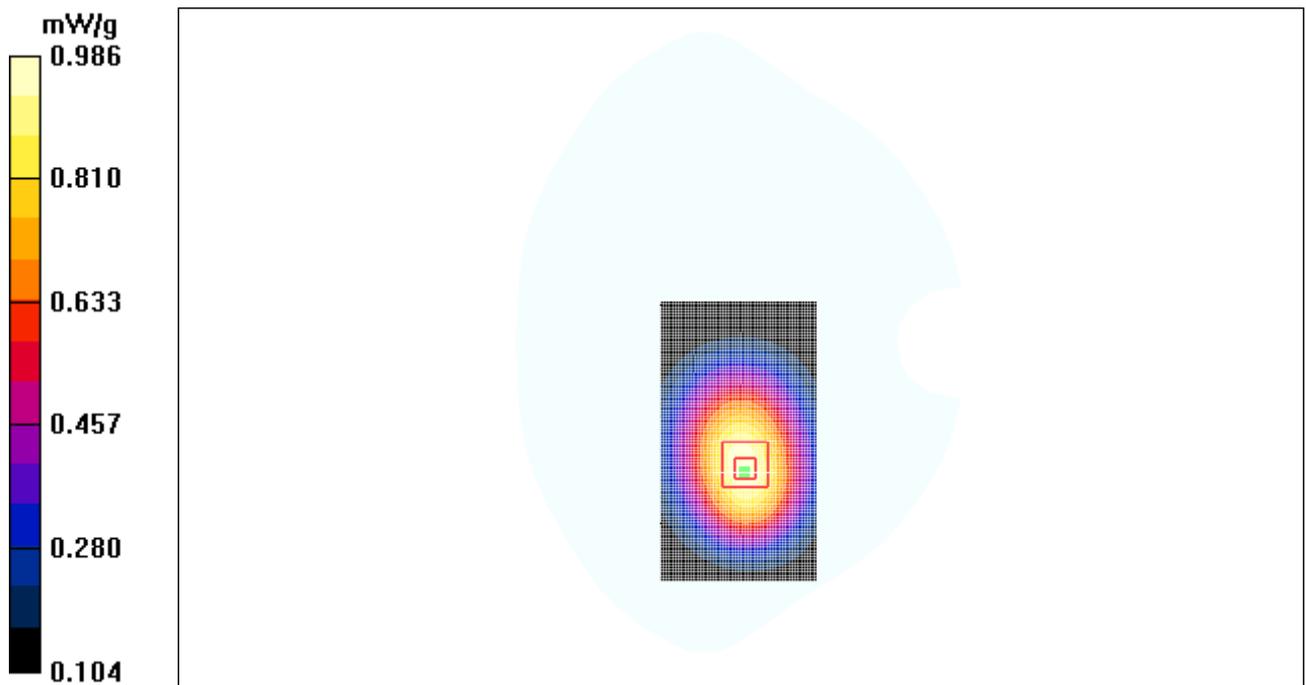


Figure 54 Body, Towards Phantom, GSM 850 GPRS Channel 190

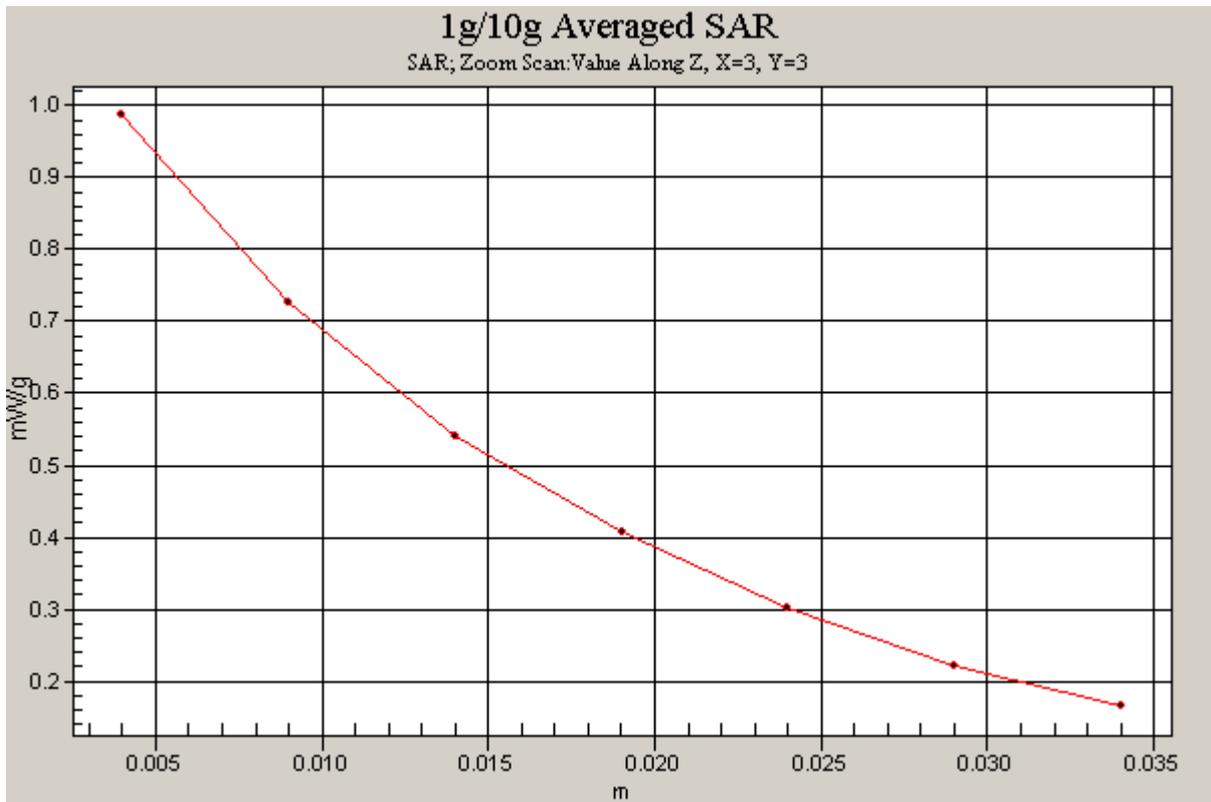


Figure 55 Z-Scan at power reference point (Body, Towards Phantom, GSM 850 GPRS Channel 190)

**GSM 850 GPRS Towards Phantom Low**

Communication System: GSM850 + GPRS(2Up); Frequency: 824.2 MHz;Duty Cycle: 1:4

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.972$  mho/m;  $\epsilon_r = 55.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);

Electronics: DAE3 Sn536;

**Towards Phantom Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.777 mW/g

**Towards Phantom Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.996 W/kg

**SAR(1 g) = 0.740 mW/g; SAR(10 g) = 0.531 mW/g**

Maximum value of SAR (measured) = 0.786 mW/g

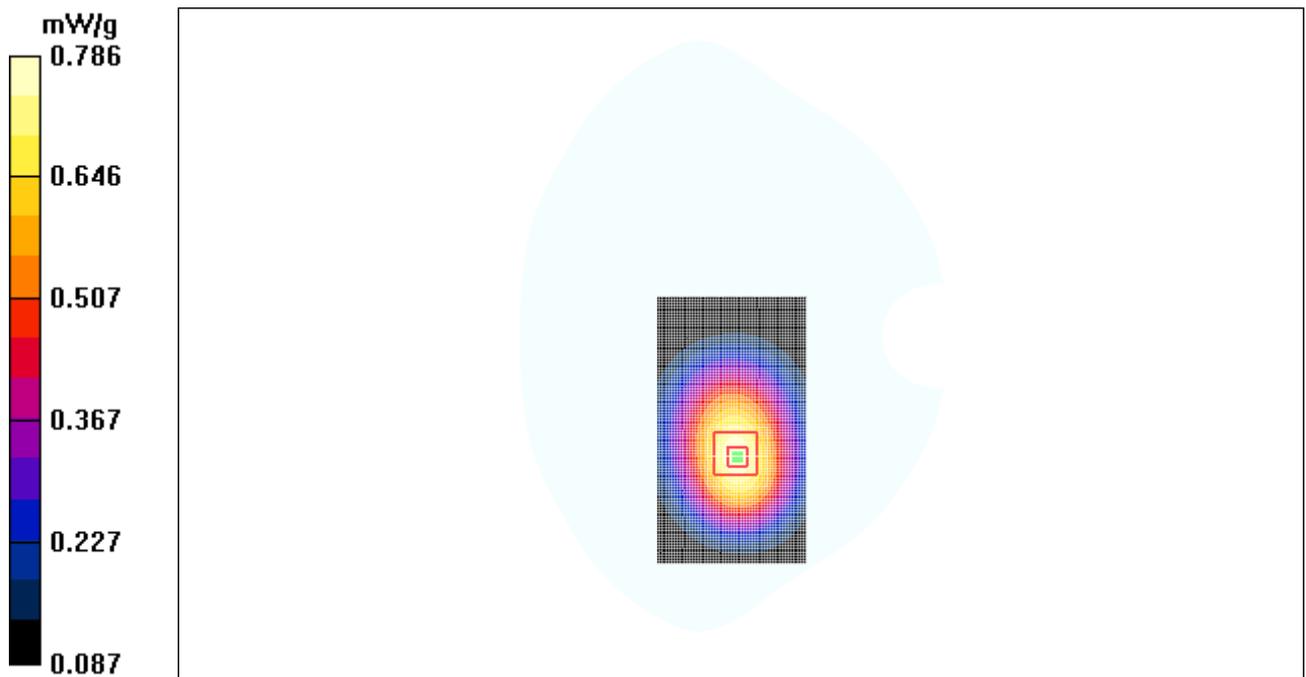


Figure 56 Body, Towards Phantom, GSM 850 GPRS Channel 128

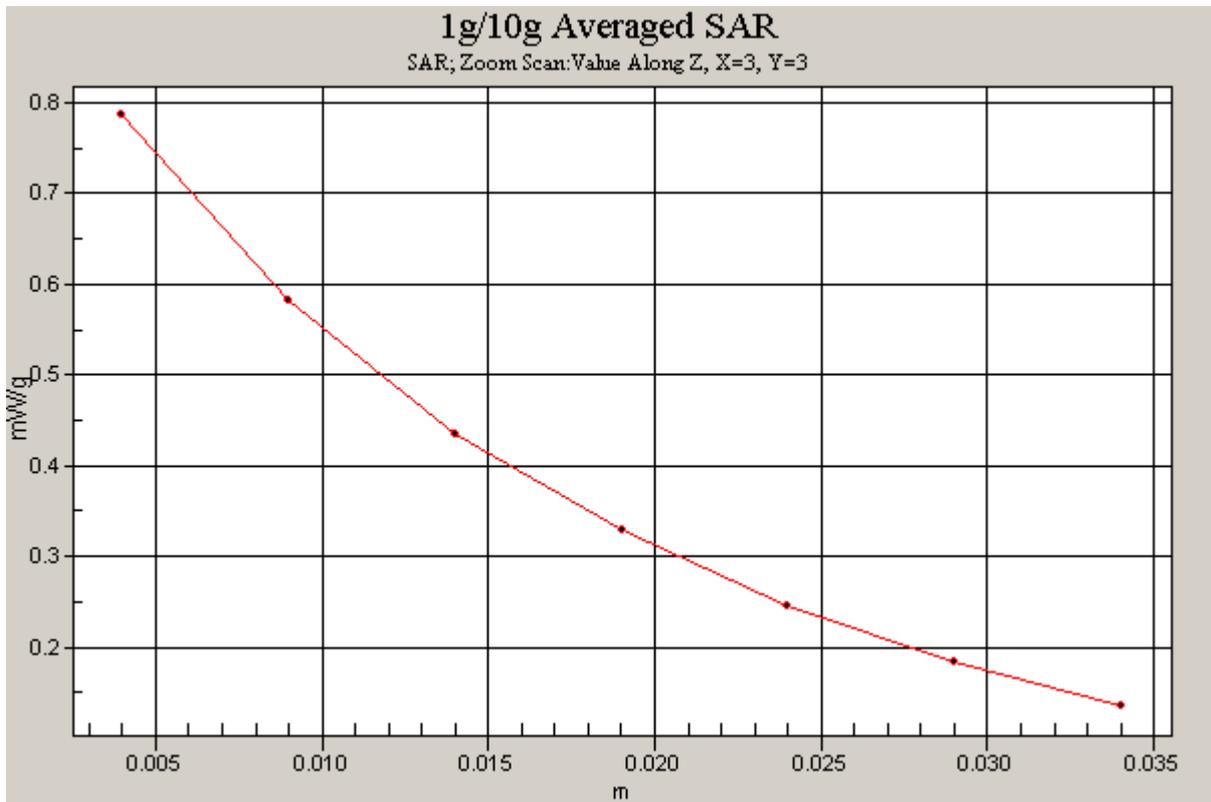


Figure 57 Z-Scan at power reference point (Body, Towards Phantom, GSM 850 GPRS Channel 128)

### GSM 1900 Left Cheek High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.35, 7.35, 7.35);

Electronics: DAE3 Sn536;

**Cheek High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.26 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.0 V/m; Power Drift = 0.065 dB

Peak SAR (extrapolated) = 1.58 W/kg

**SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.626 mW/g**

Maximum value of SAR (measured) = 1.15 mW/g

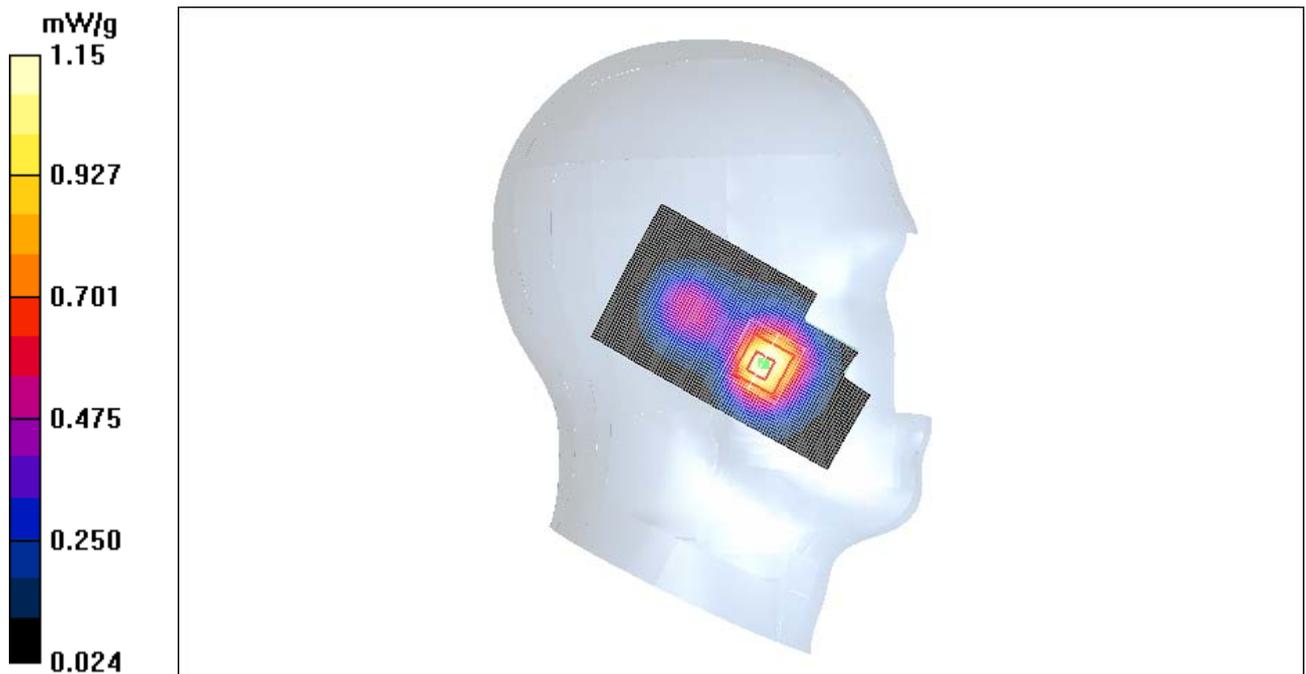


Figure 58 Left Hand Touch Cheek GSM 1900 Channel 810

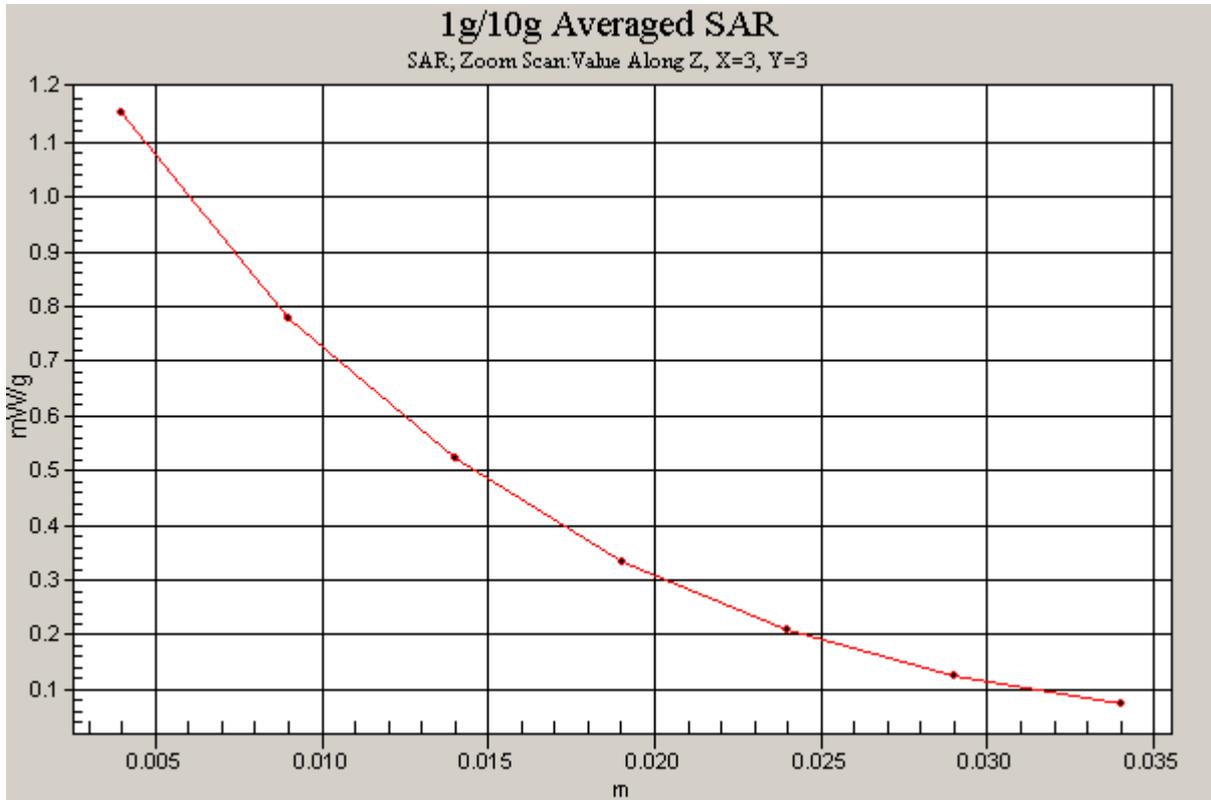


Figure 59 Z-Scan at power reference point (Left Hand Touch Cheek GSM 1900 Channel 810)

### GSM 1900 Left Cheek Middle

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.37$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.35, 7.35, 7.35);

Electronics: DAE3 Sn536;

**Cheek Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.20 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 1.50 W/kg

**SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.598 mW/g**

Maximum value of SAR (measured) = 1.10 mW/g

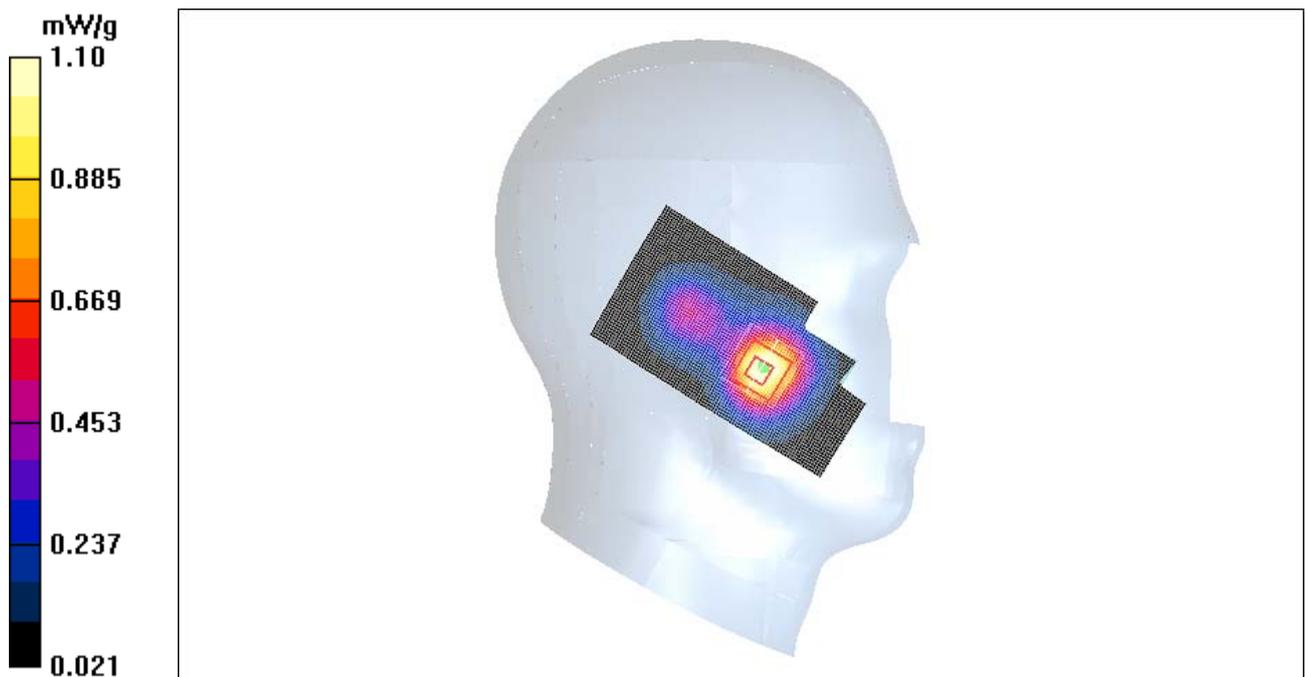


Figure 60 Left Hand Touch Cheek GSM 1900 Channel 661

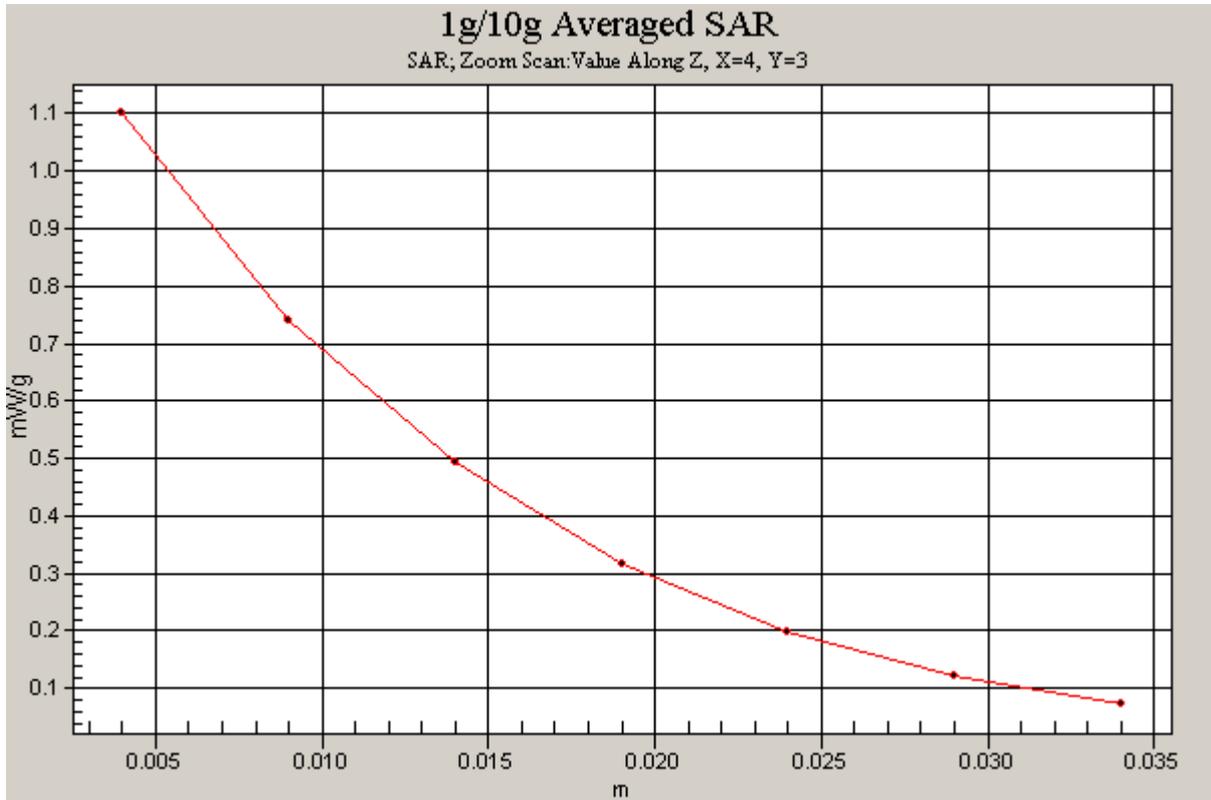


Figure 61 Z-Scan at power reference point (Left Hand Touch Cheek GSM 1900 Channel 661)

**GSM 1900 Left Cheek Low**

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.34$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.35, 7.35, 7.35);

Electronics: DAE3 Sn536;

**Cheek Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.01 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = -0.078 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.855 mW/g; SAR(10 g) = 0.514 mW/g**

Maximum value of SAR (measured) = 0.932 mW/g

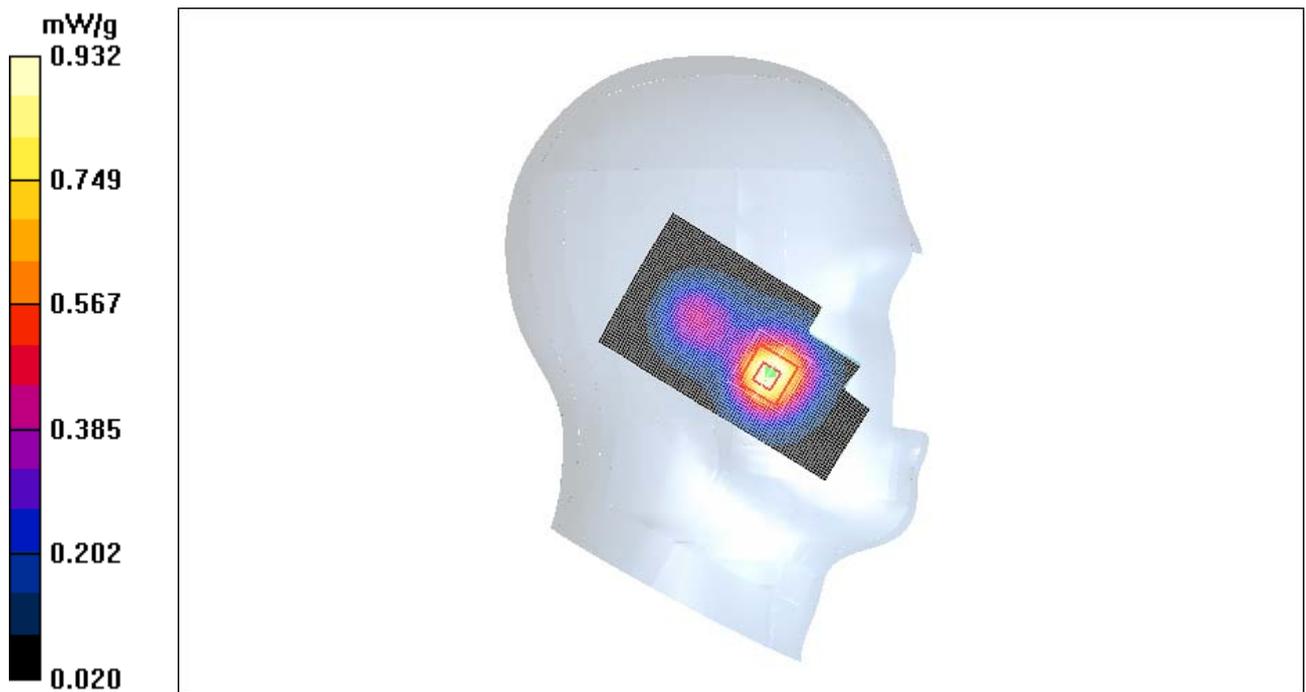


Figure 62 Left Hand Touch Cheek GSM 1900 Channel 512

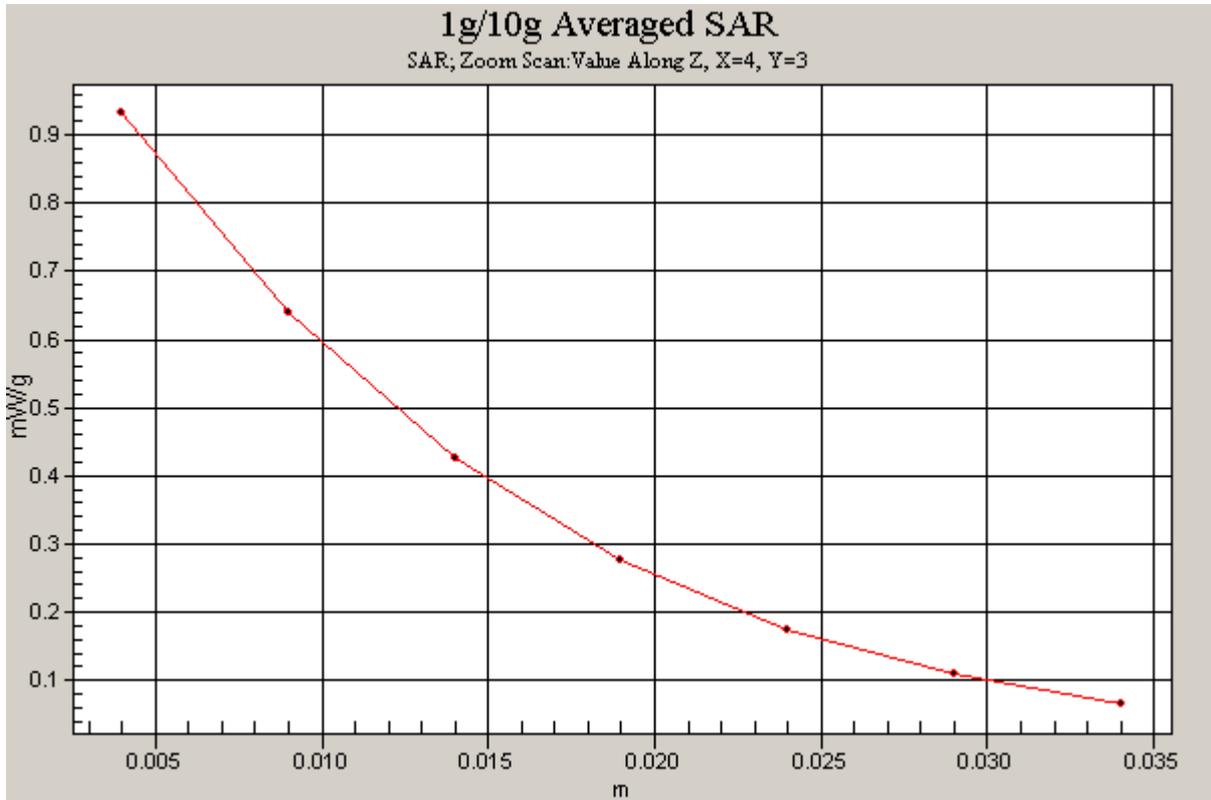


Figure 63 Z-Scan at power reference point (Left Hand Touch Cheek GSM 1900 Channel 512)

### GSM 1900 Left Tilt High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.35, 7.35, 7.35);

Electronics: DAE3 Sn536;

**Tilt High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.449 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.568 W/kg

**SAR(1 g) = 0.374 mW/g; SAR(10 g) = 0.228 mW/g**

Maximum value of SAR (measured) = 0.406 mW/g



Figure 64 Left Hand Tilt 15° GSM 1900 Channel 810

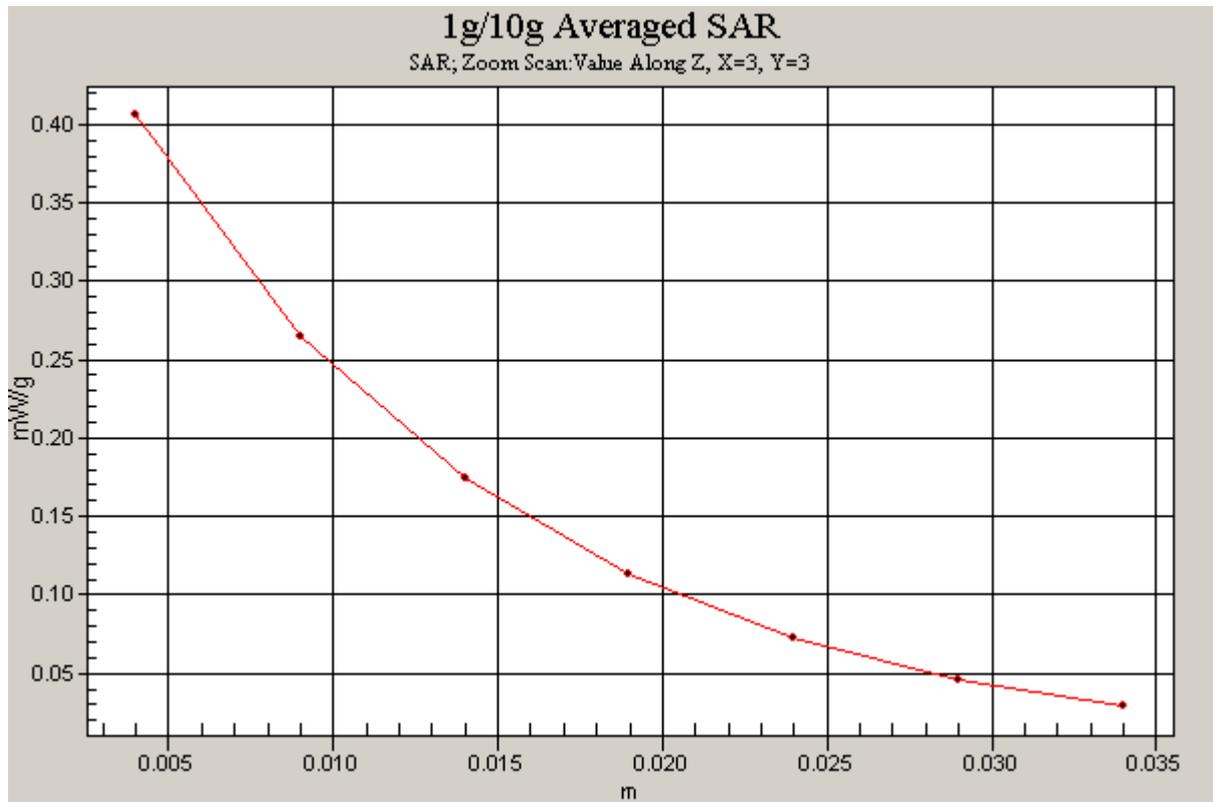


Figure 65 Z-Scan at power reference point (Left Hand Tilt 15° GSM 1900 Channel 810)

### GSM 1900 Left Tilt Middle

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.37$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.35, 7.35, 7.35);

Electronics: DAE3 Sn536;

**Tilt Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.422 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.536 W/kg

**SAR(1 g) = 0.352 mW/g; SAR(10 g) = 0.215 mW/g**

Maximum value of SAR (measured) = 0.382 mW/g

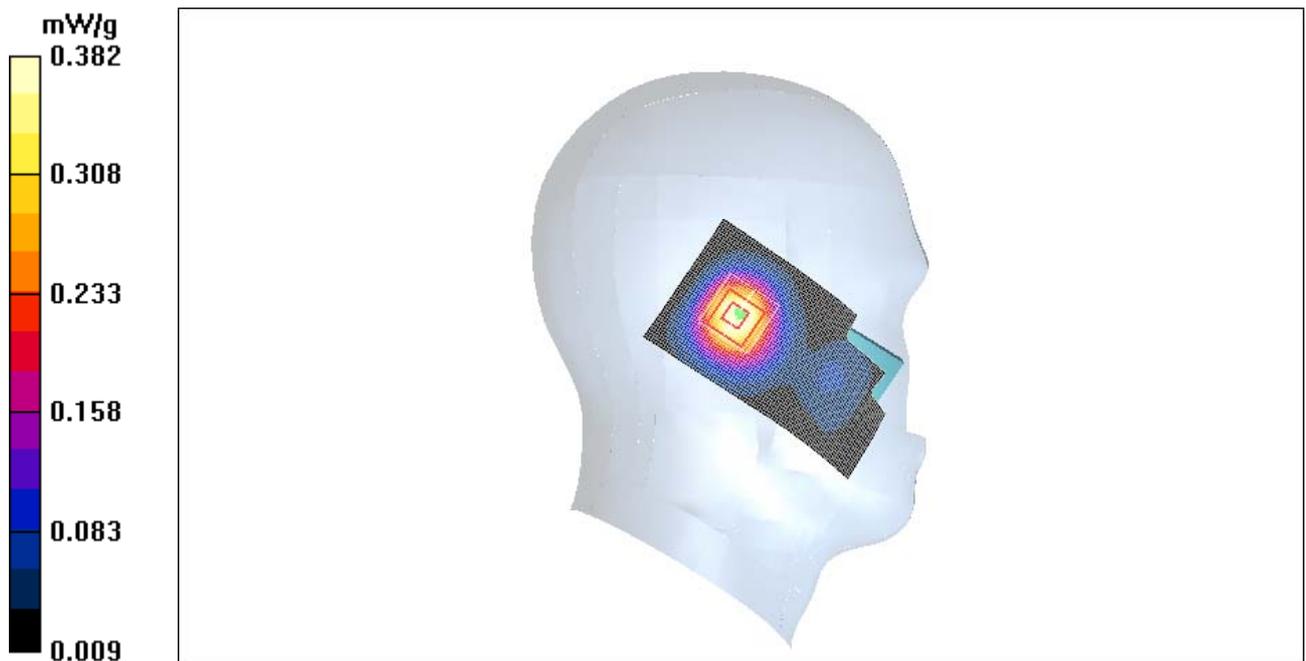


Figure 66 Left Hand Tilt 15 ° GSM 1900 Channel 661

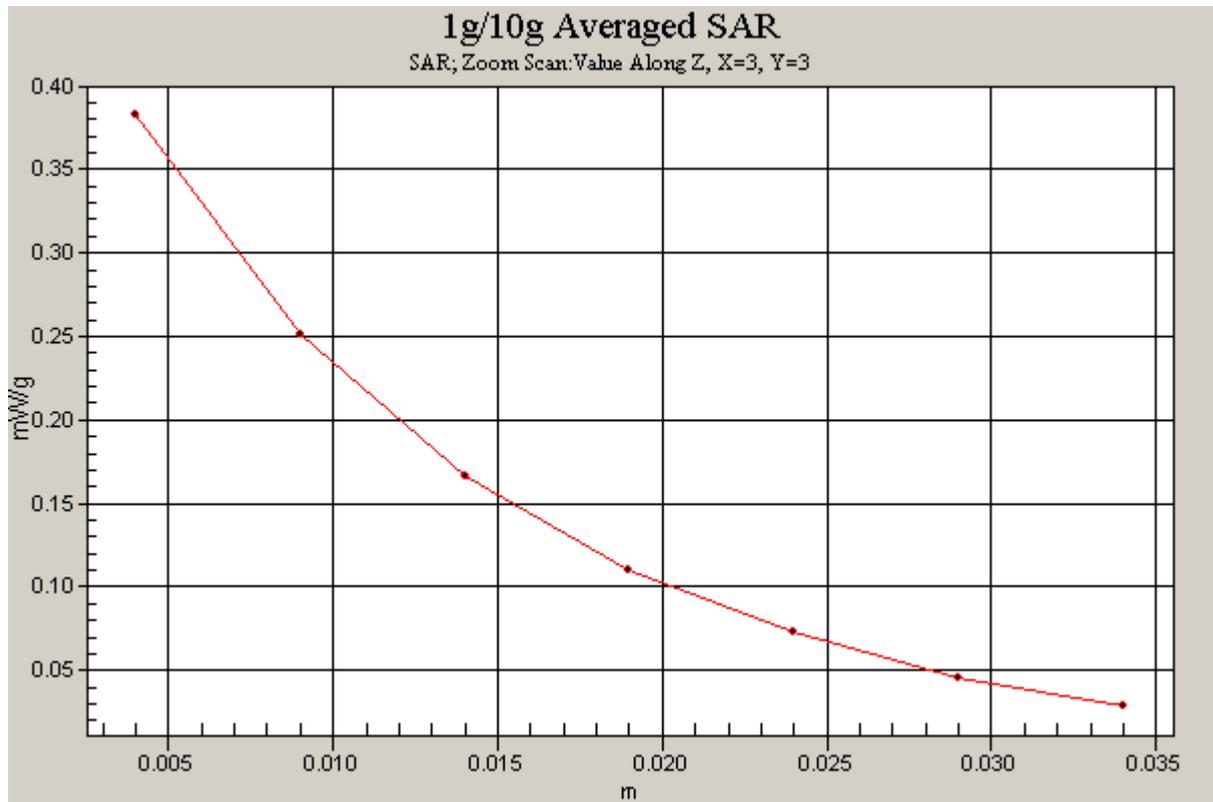


Figure 67 Z-Scan at power reference point (Left Hand Tilt 15 ° GSM 1900 Channel 661)

**GSM 1900 Left Tilt Low**

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.34$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.35, 7.35, 7.35);

Electronics: DAE3 Sn536;

**Tilt Low/Area Scan (51x91x1)**: Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.392 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.492 W/kg

**SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.202 mW/g**

Maximum value of SAR (measured) = 0.353 mW/g

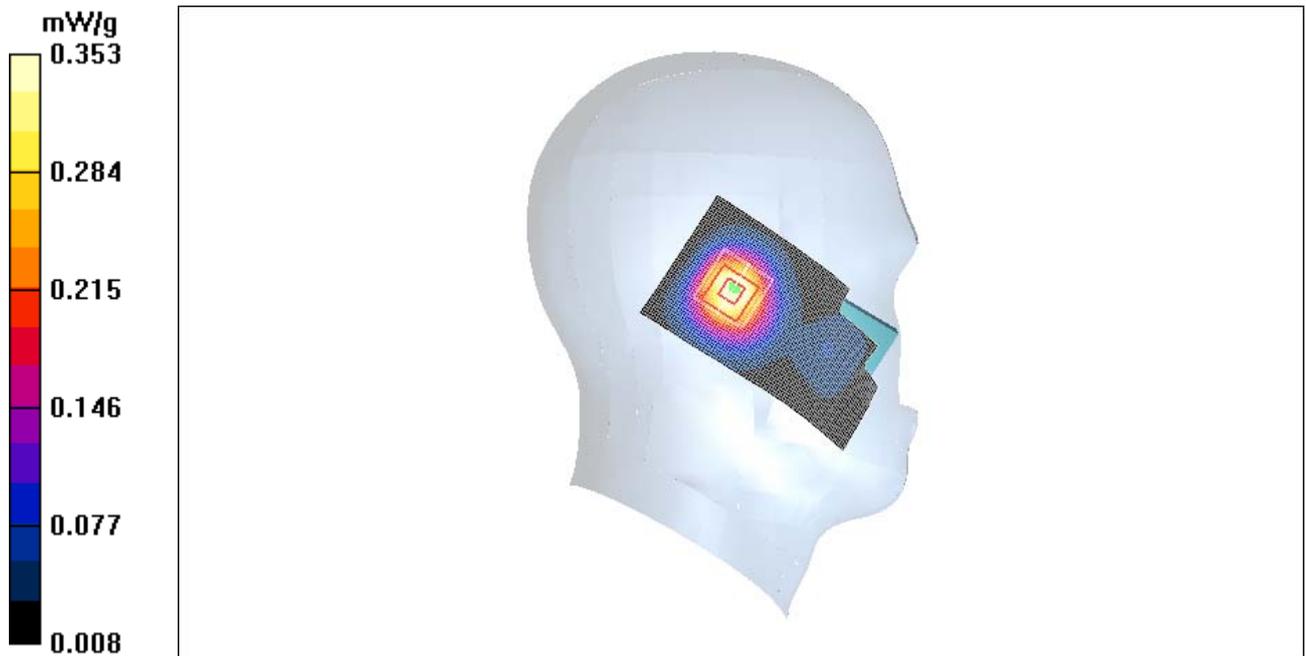


Figure 68 Left Hand Tilt 15 ° GSM 1900 Channel 512

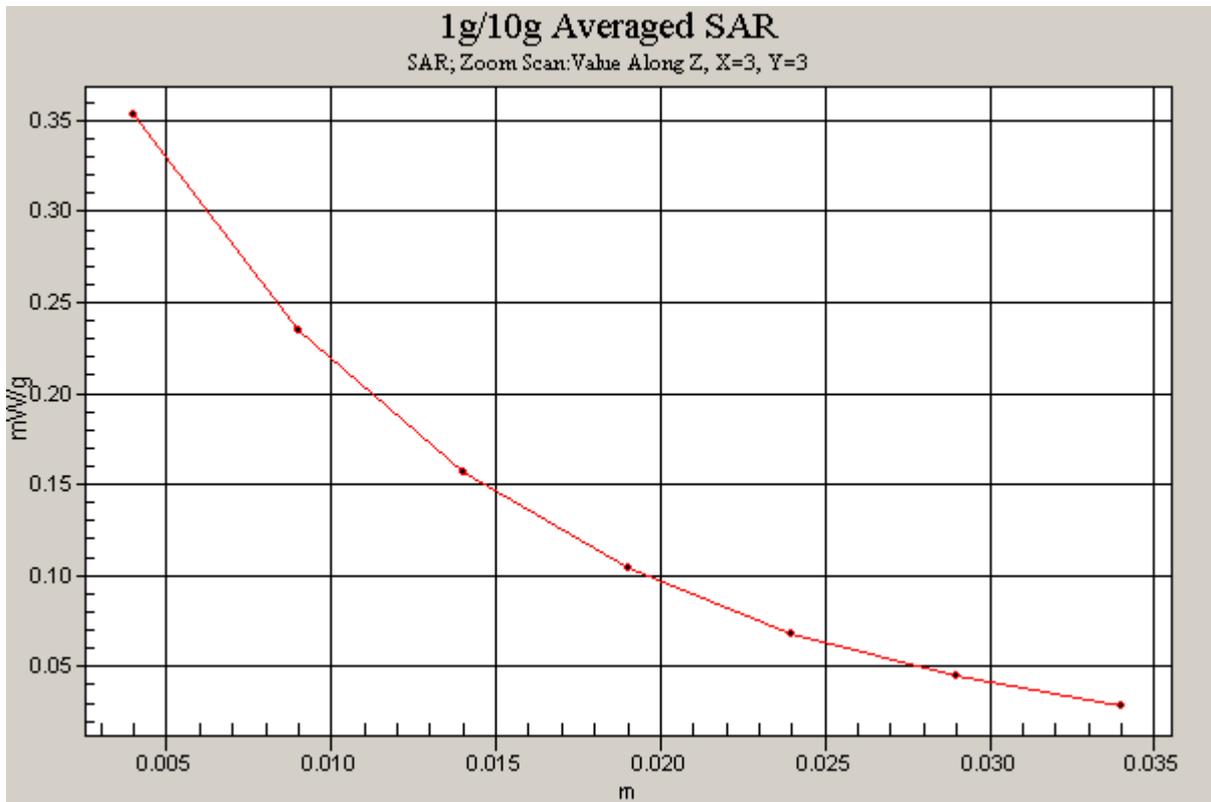


Figure 69 Z-Scan at power reference point (Left Hand Tilt 15 ° GSM 1900 Channel 512)

### GSM 1900 Right Cheek High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.35, 7.35, 7.35);

Electronics: DAE3 Sn536;

**Cheek High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.933 mW/g


**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.2 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.851 mW/g; SAR(10 g) = 0.497 mW/g**

Maximum value of SAR (measured) = 0.927 mW/g

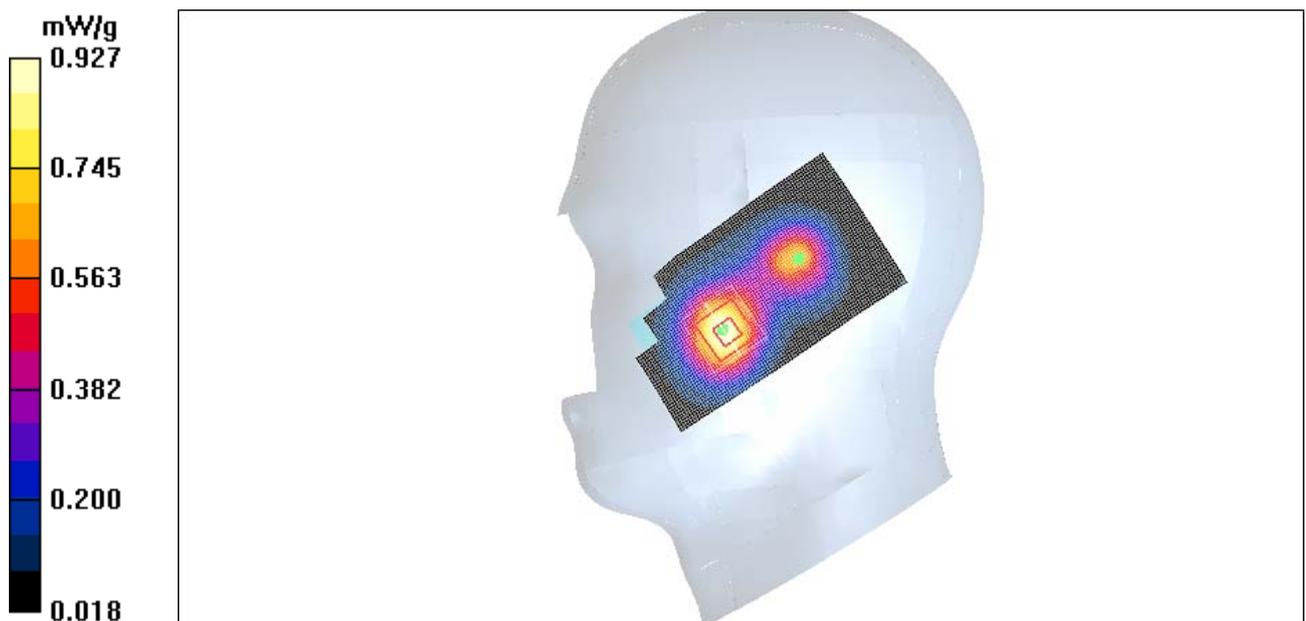

**Cheek High/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.2 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 0.882 W/kg

**SAR(1 g) = 0.573 mW/g; SAR(10 g) = 0.341 mW/g**

Maximum value of SAR (measured) = 0.624 mW/g

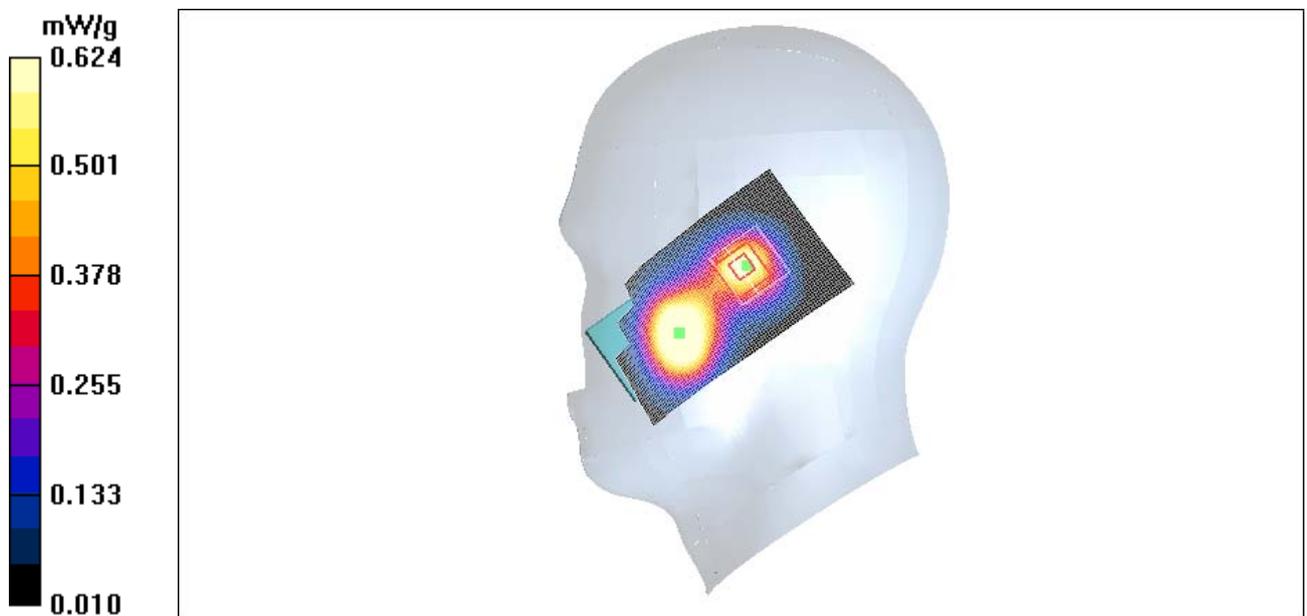


Figure 70 Right Hand Touch Cheek GSM 1900 Channel 810

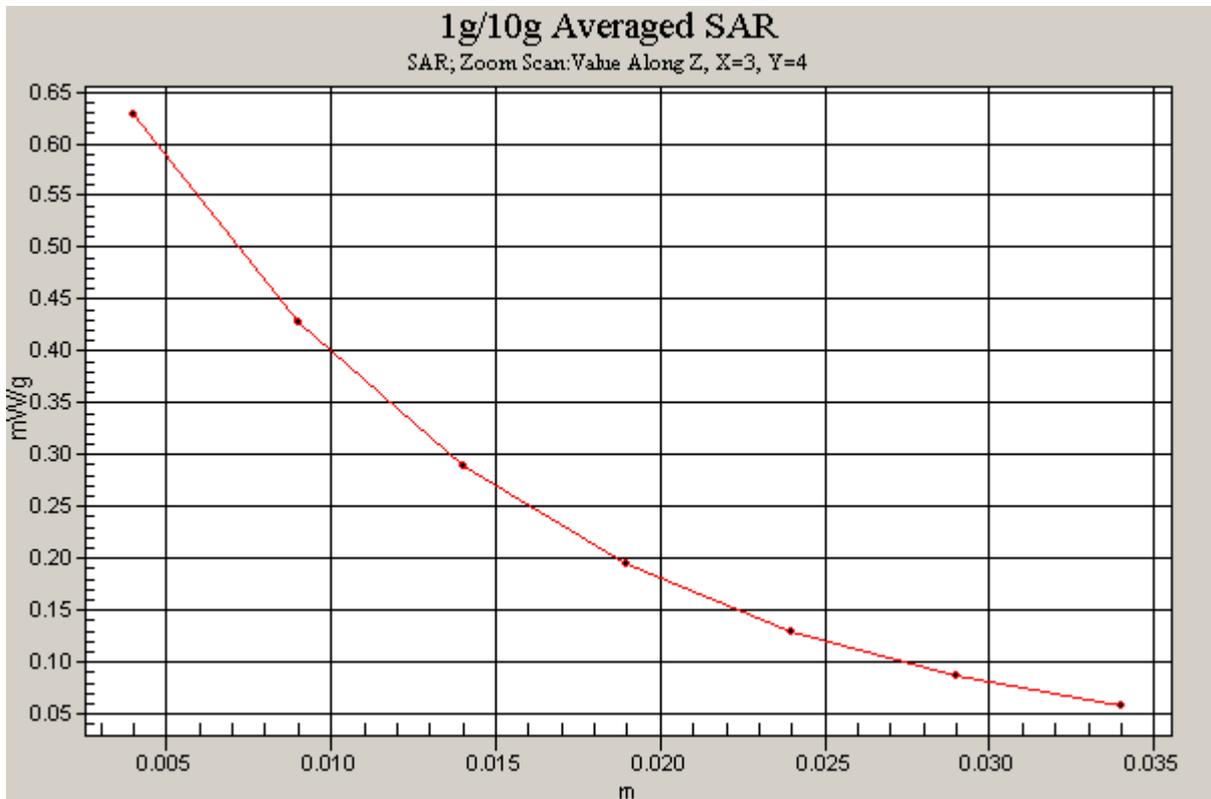
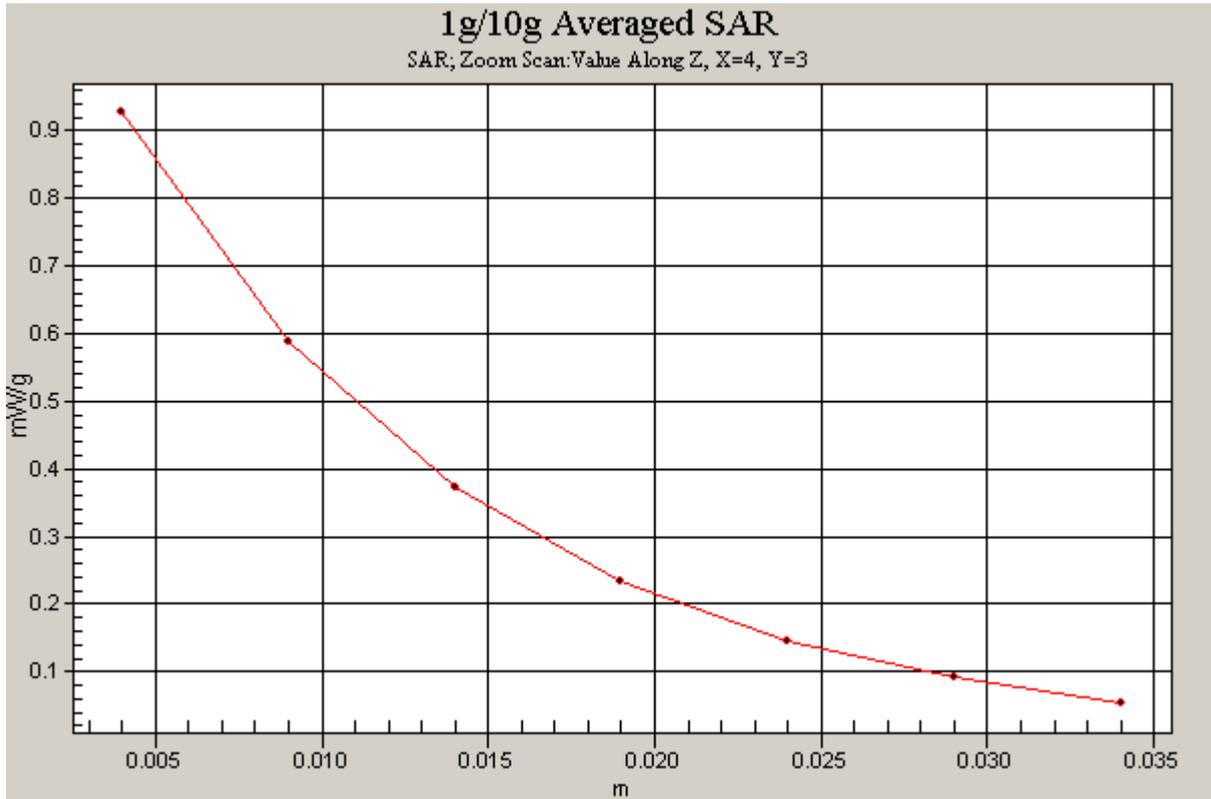


Figure 71 Z-Scan at power reference point (Right Hand Touch Cheek GSM 1900 Channel 810)

### GSM 1900 Right Cheek Middle

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.37$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.35, 7.35, 7.35);

Electronics: DAE3 Sn536;

**Cheek Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.871 mW/g


**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 1.22 W/kg

**SAR(1 g) = 0.792 mW/g; SAR(10 g) = 0.466 mW/g**

Maximum value of SAR (measured) = 0.870 mW/g

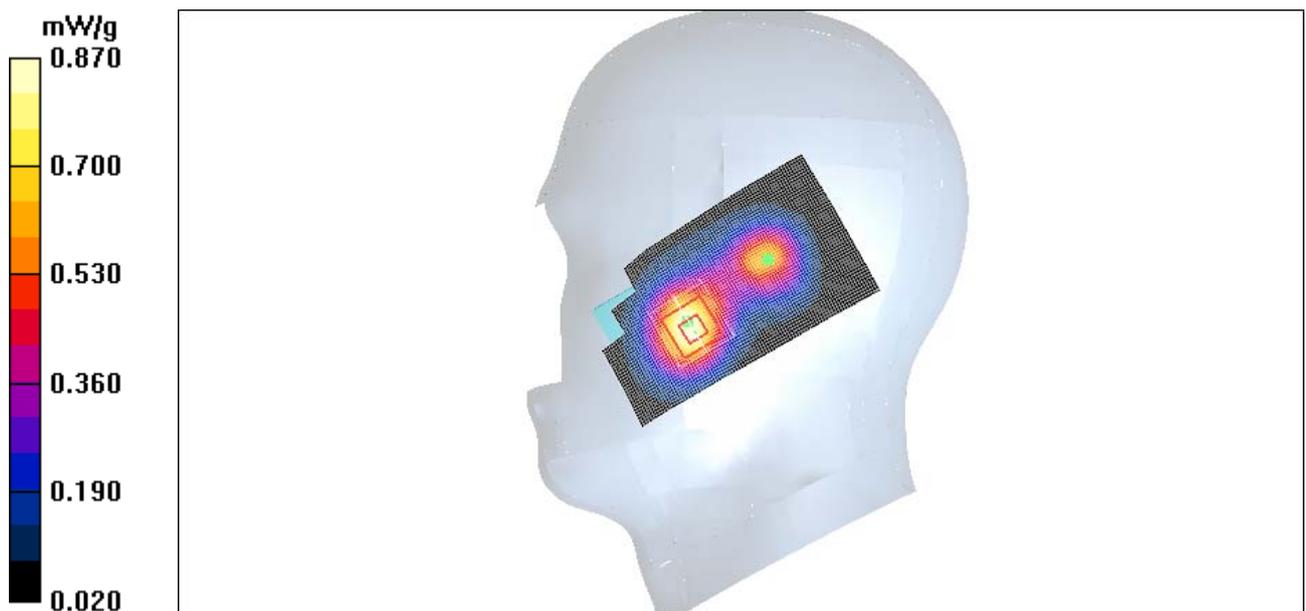

**Cheek Middle/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.832 W/kg

**SAR(1 g) = 0.547 mW/g; SAR(10 g) = 0.328 mW/g**

Maximum value of SAR (measured) = 0.593 mW/g

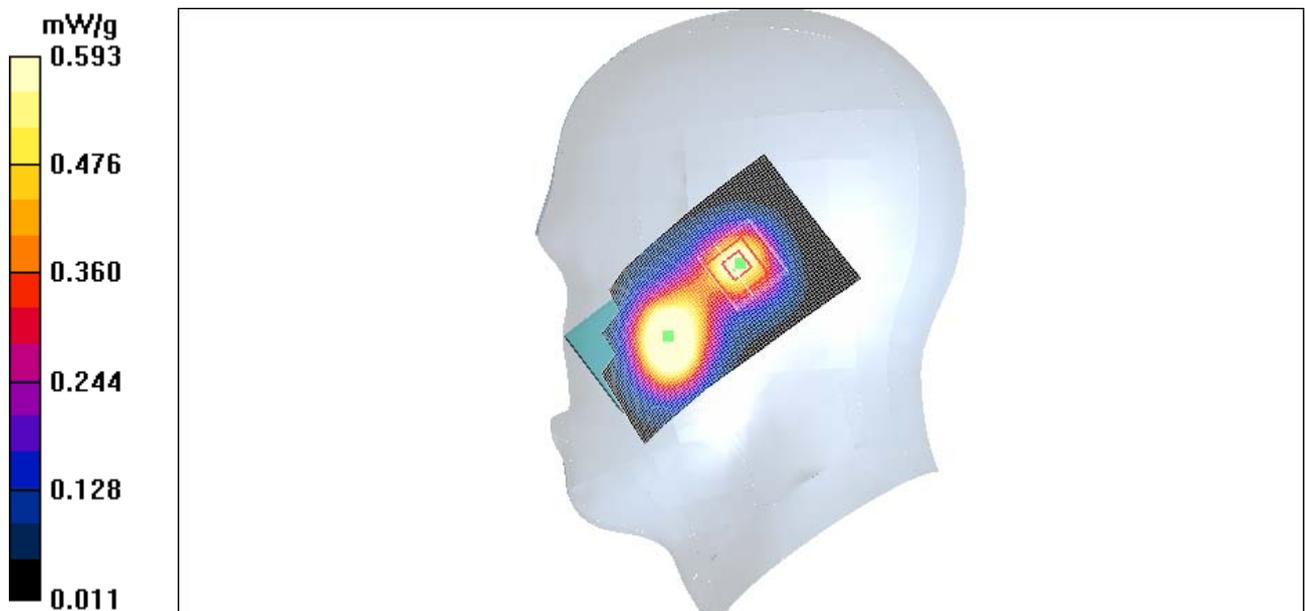


Figure 72 Right Hand Touch Cheek GSM 1900 Channel 661

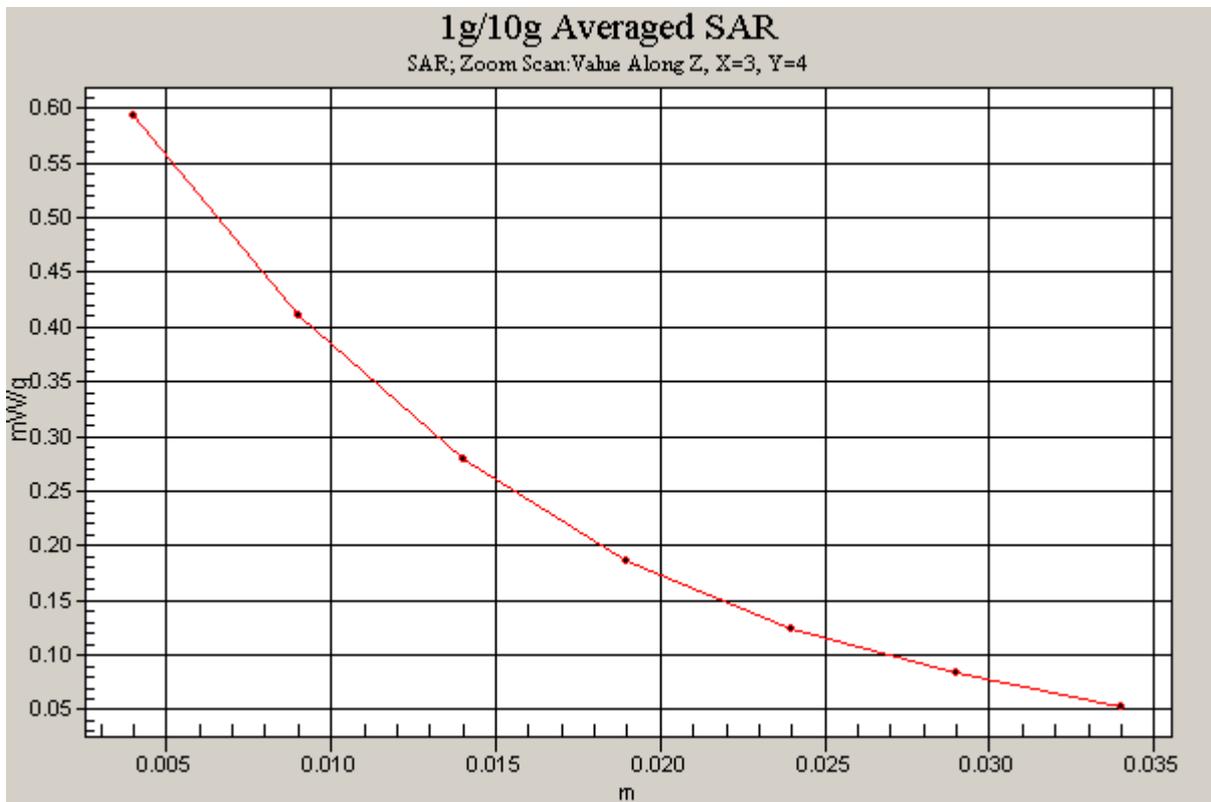
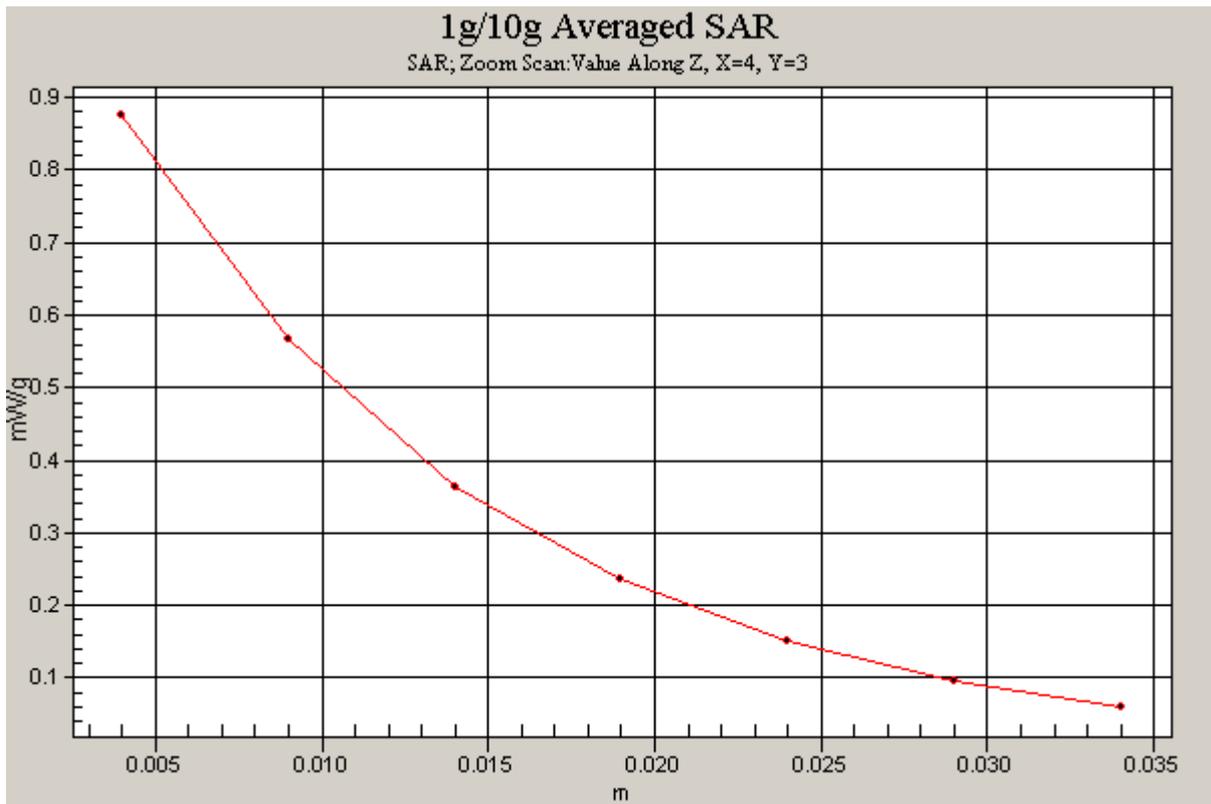


Figure 73 Z-Scan at power reference point (Right Hand Touch Cheek GSM 1900 Channel 661)

**GSM 1900 Right Cheek Low**

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.34$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.35, 7.35, 7.35); Electronics: DAE3 Sn536;

**Cheek Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.747 mW/g


**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.0 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.670 mW/g; SAR(10 g) = 0.400 mW/g**

Maximum value of SAR (measured) = 0.734 mW/g

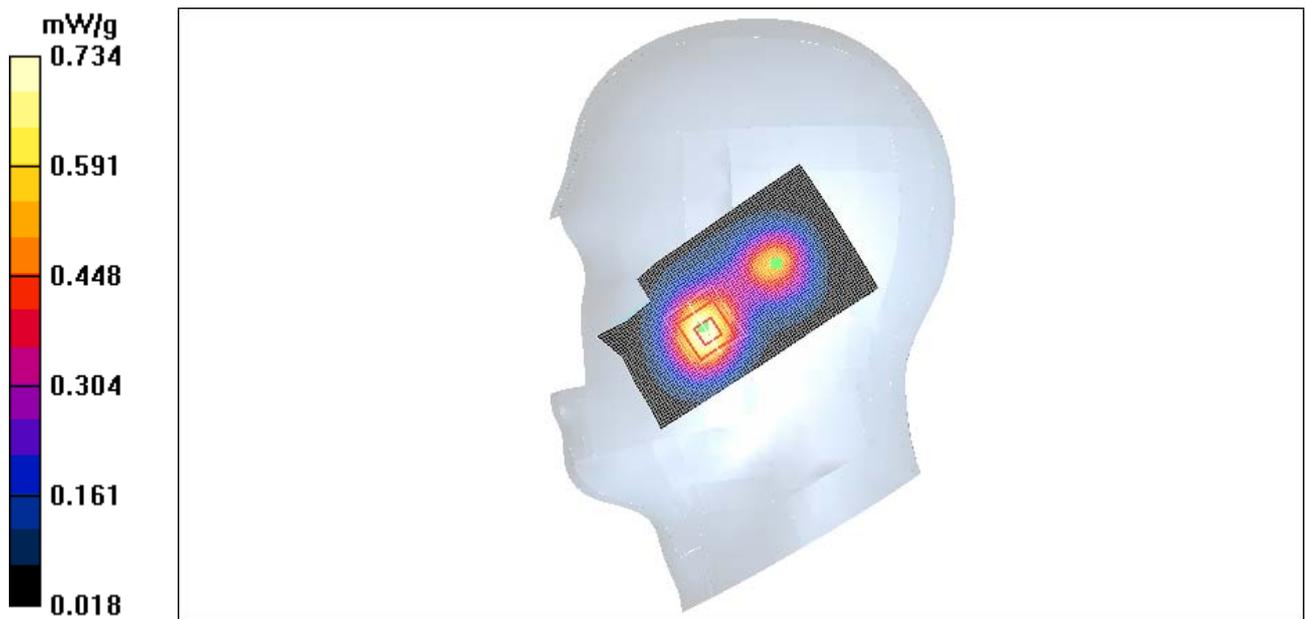

**Cheek Low/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.0 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.730 W/kg

**SAR(1 g) = 0.487 mW/g; SAR(10 g) = 0.295 mW/g**

Maximum value of SAR (measured) = 0.533 mW/g

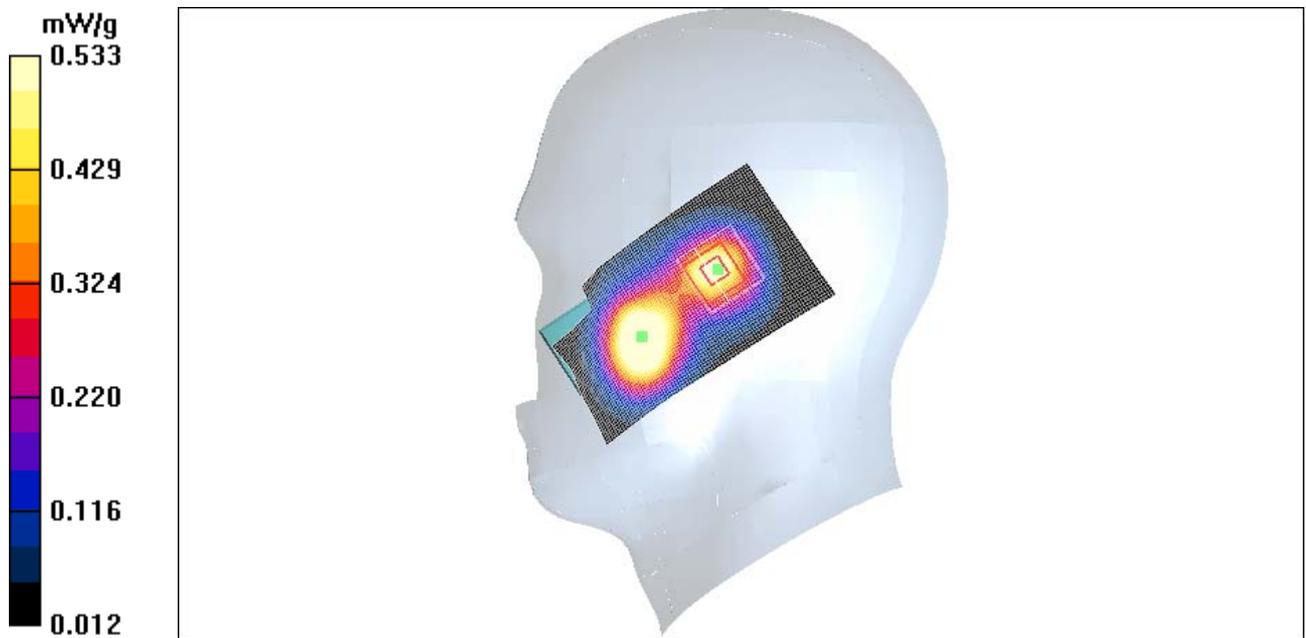


Figure 74 Right Hand Touch Cheek GSM 1900 Channel 512

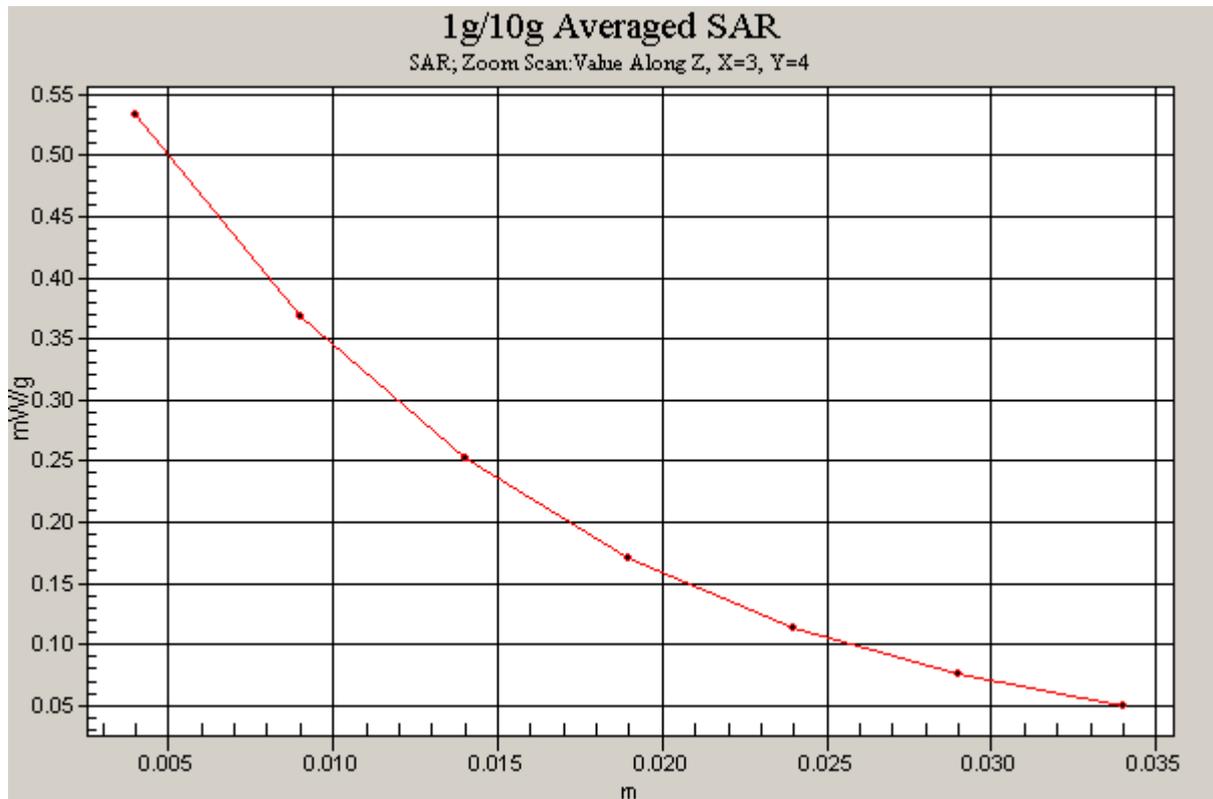
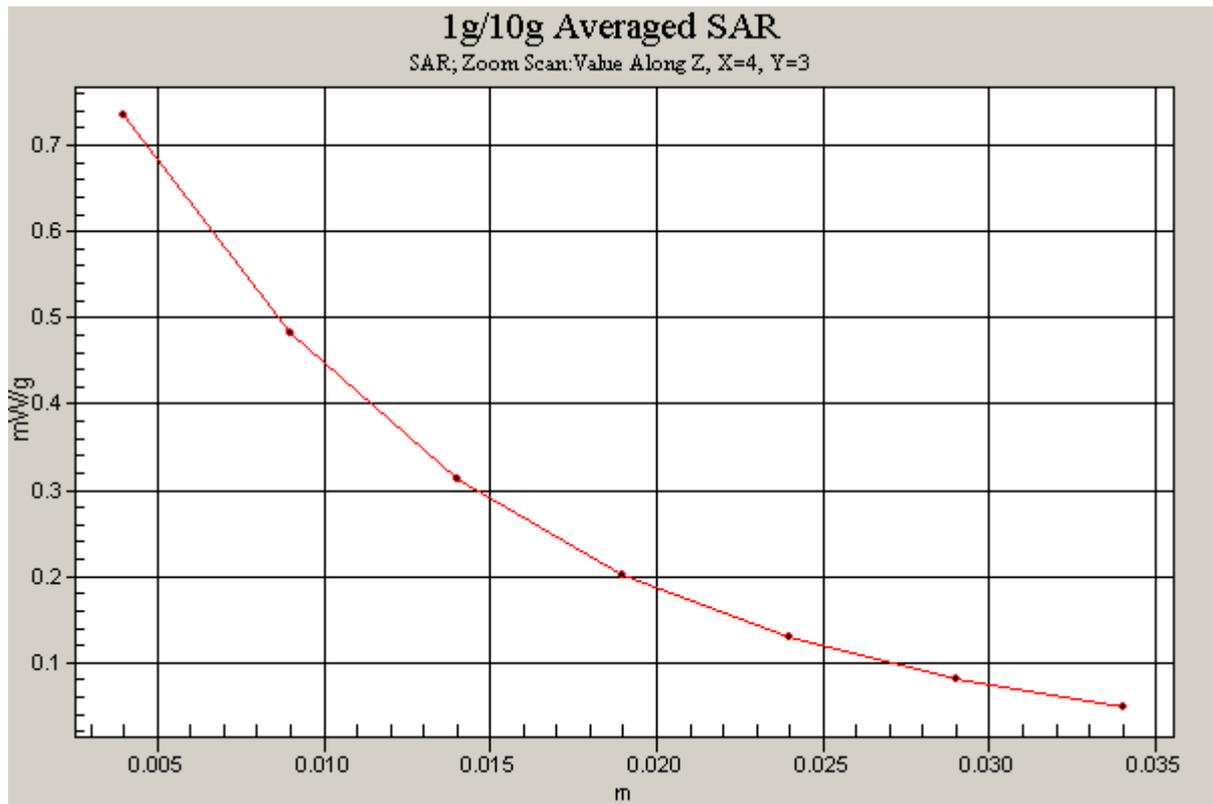


Figure 75 Z-Scan at power reference point (Right Hand Touch Cheek GSM 1900 Channel 512)

### GSM 1900 Right Tilt High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.35, 7.35, 7.35);

Electronics: DAE3 Sn536;

**Tilt High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.504 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.3 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.637 W/kg

**SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.243 mW/g**

Maximum value of SAR (measured) = 0.448 mW/g

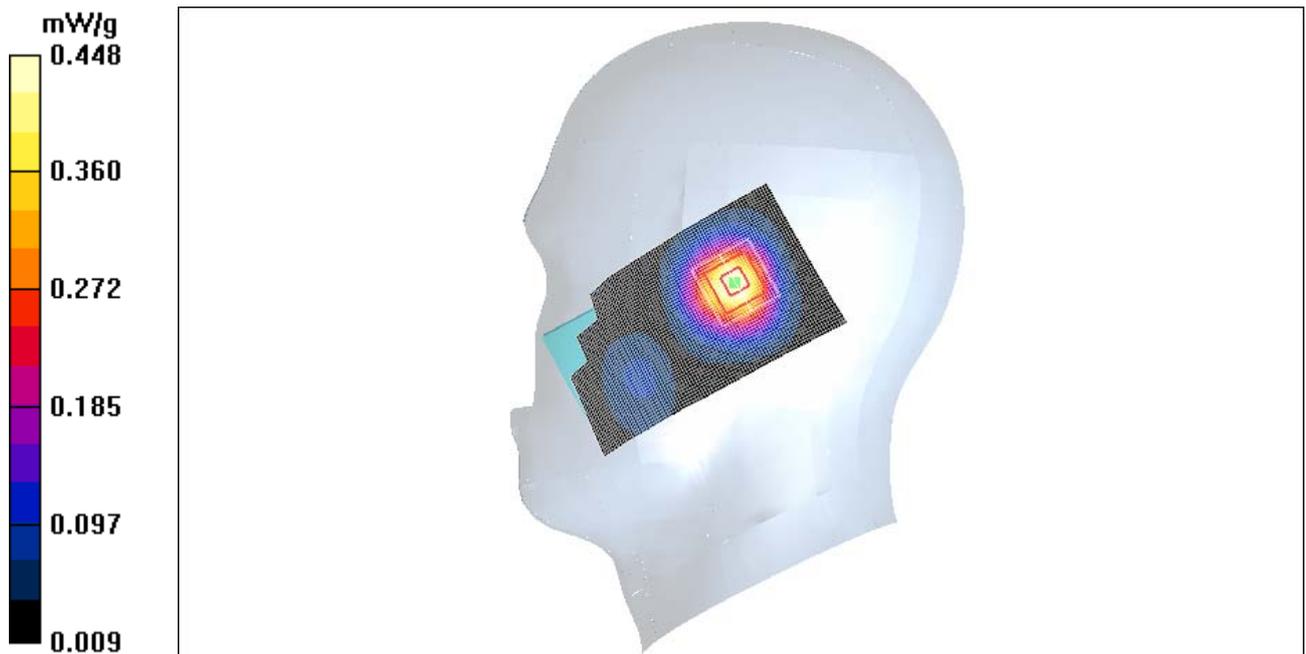


Figure 76 Right Hand Tilt 15 ° GSM 1900 Channel 810

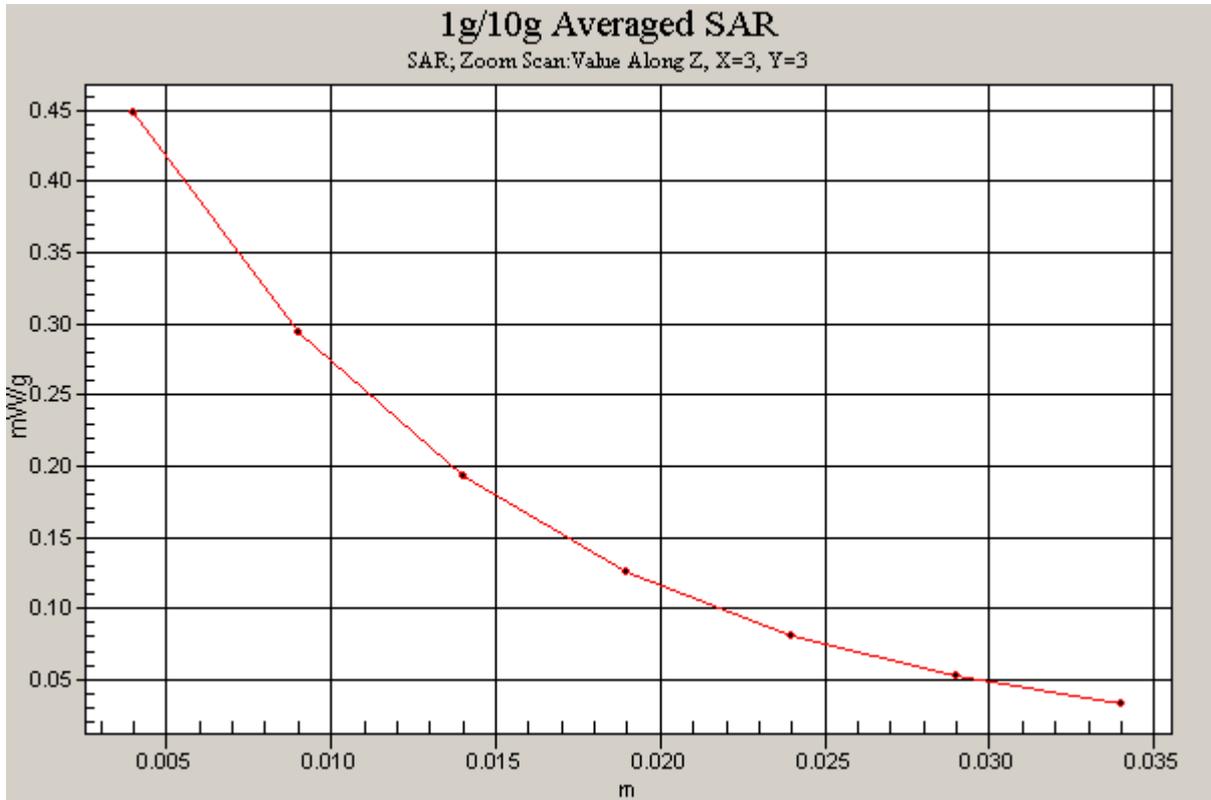


Figure 77 Z-Scan at power reference point (Right Hand Tilt 15 ° GSM 1900 Channel 810)

### GSM 1900 Right Tilt Middle

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.37$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.35, 7.35, 7.35);

Electronics: DAE3 Sn536;

**Tilt Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.469 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.583 W/kg

**SAR(1 g) = 0.378 mW/g; SAR(10 g) = 0.227 mW/g**

Maximum value of SAR (measured) = 0.416 mW/g

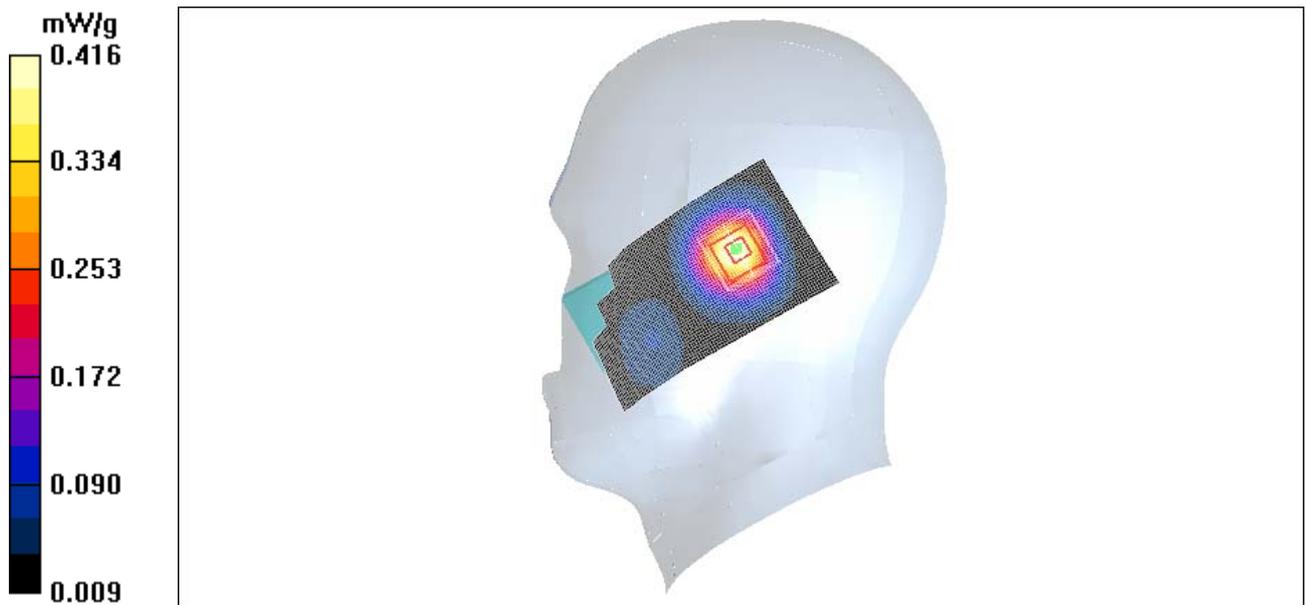


Figure 78 Right Hand Tilt 15 ° GSM 1900 Channel 661

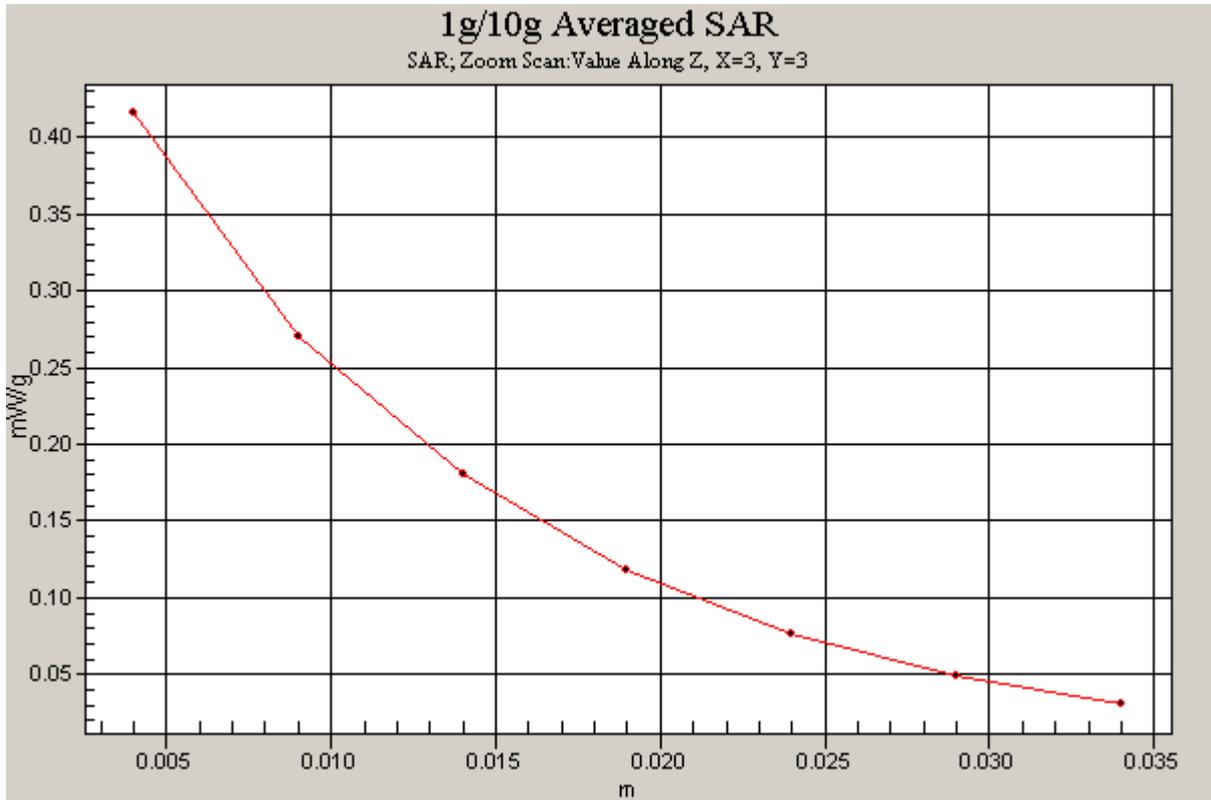


Figure 79 Z-Scan at power reference point (Right Hand Tilt 15 ° GSM 1900 Channel 661)

### GSM 1900 Right Tilt Low

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.34$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.35, 7.35, 7.35);

Electronics: DAE3 Sn536;

**Tilt Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.433 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.548 W/kg

**SAR(1 g) = 0.359 mW/g; SAR(10 g) = 0.218 mW/g**

Maximum value of SAR (measured) = 0.393 mW/g

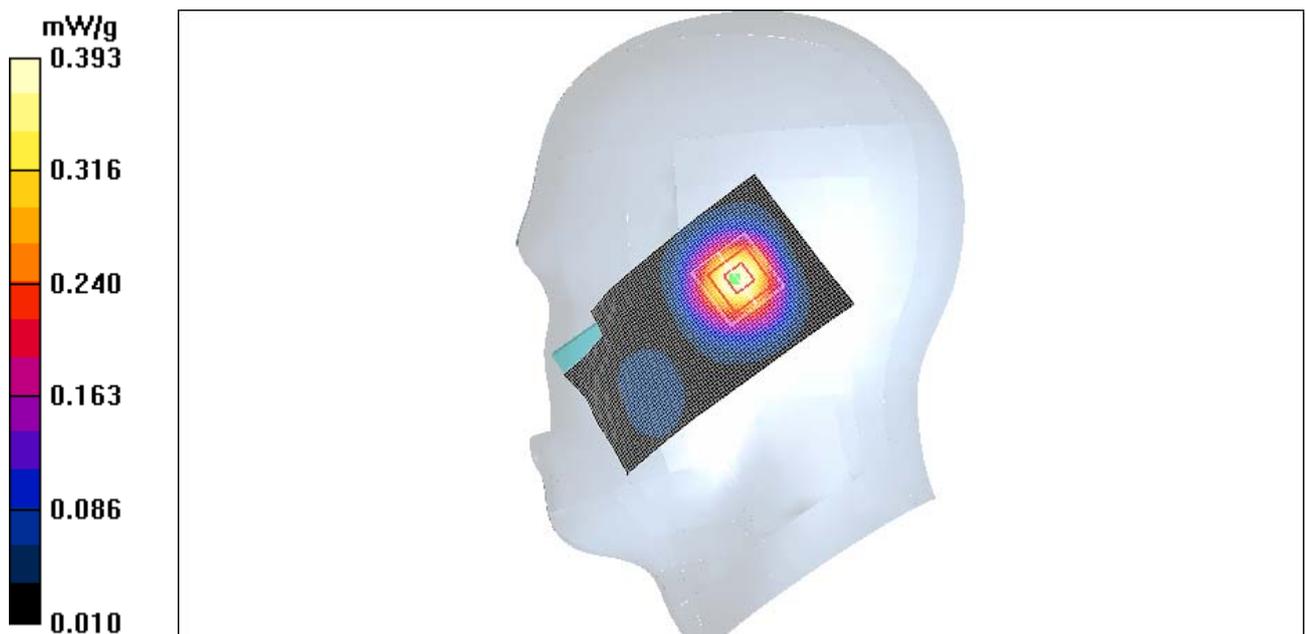


Figure 80 Right Hand Tilt 15 ° GSM 1900 Channel 512

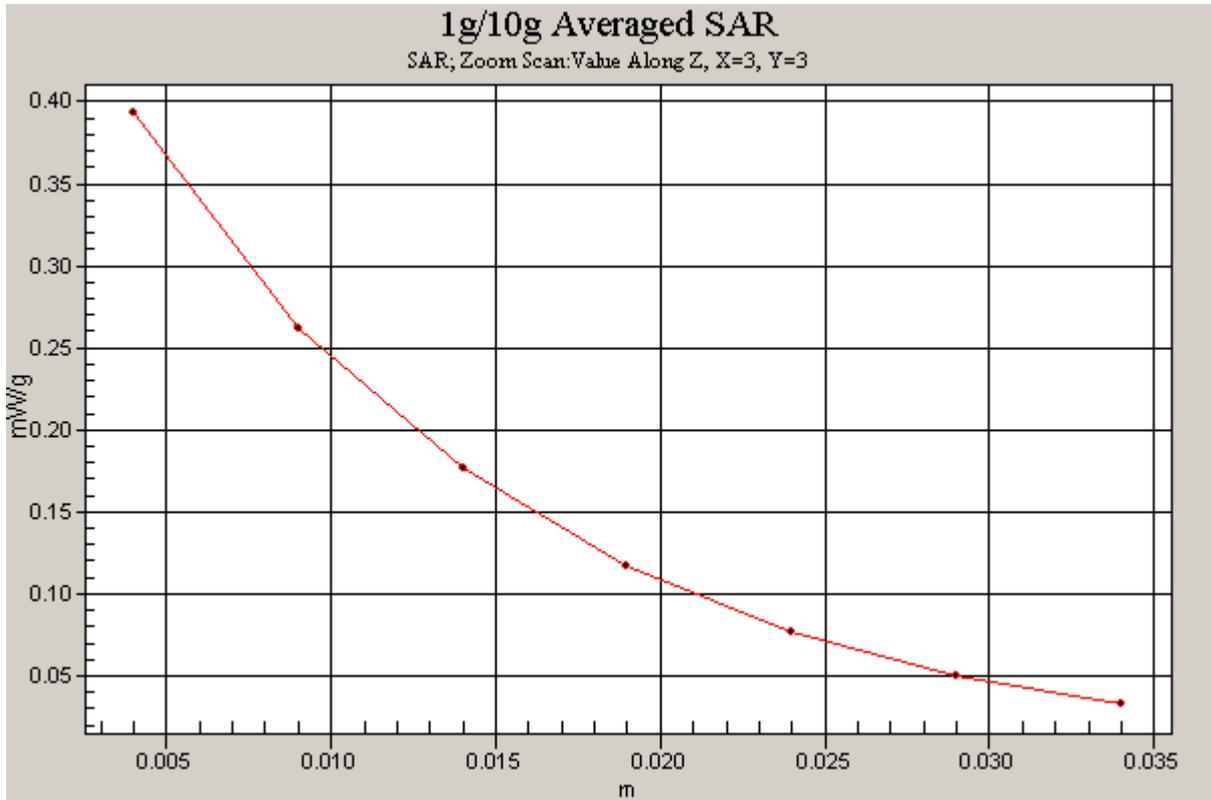


Figure 81 Z-Scan at power reference point (Right Hand Tilt 15 ° GSM 1900 Channel 512)

### GSM 1900 Towards Ground High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.58$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);

Electronics: DAE3 Sn536;

**Towards Ground High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.296 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.62 V/m; Power Drift = -0.118 dB

Peak SAR (extrapolated) = 0.410 W/kg

**SAR(1 g) = 0.256 mW/g; SAR(10 g) = 0.155 mW/g**

Maximum value of SAR (measured) = 0.276 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.62 V/m; Power Drift = -0.118 dB

Peak SAR (extrapolated) = 0.290 W/kg

**SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.122 mW/g**

Maximum value of SAR (measured) = 0.206 mW/g

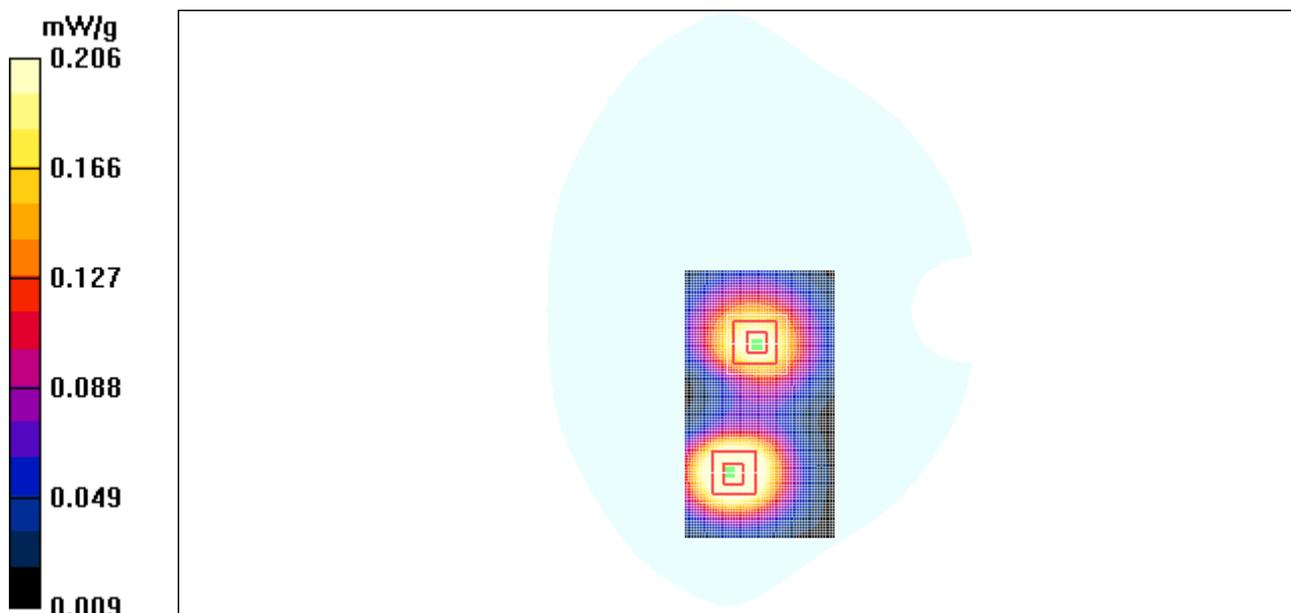


Figure 82 Body, Towards Ground, GSM 1900 Channel 810

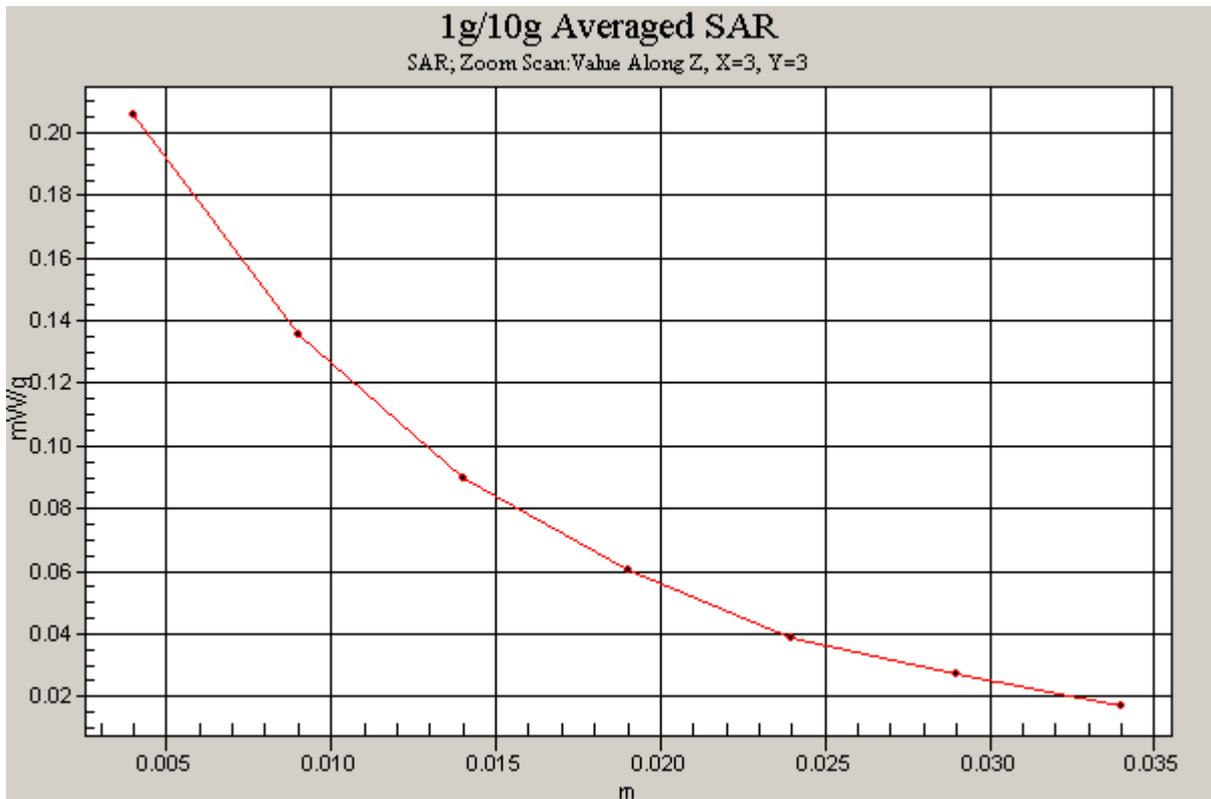
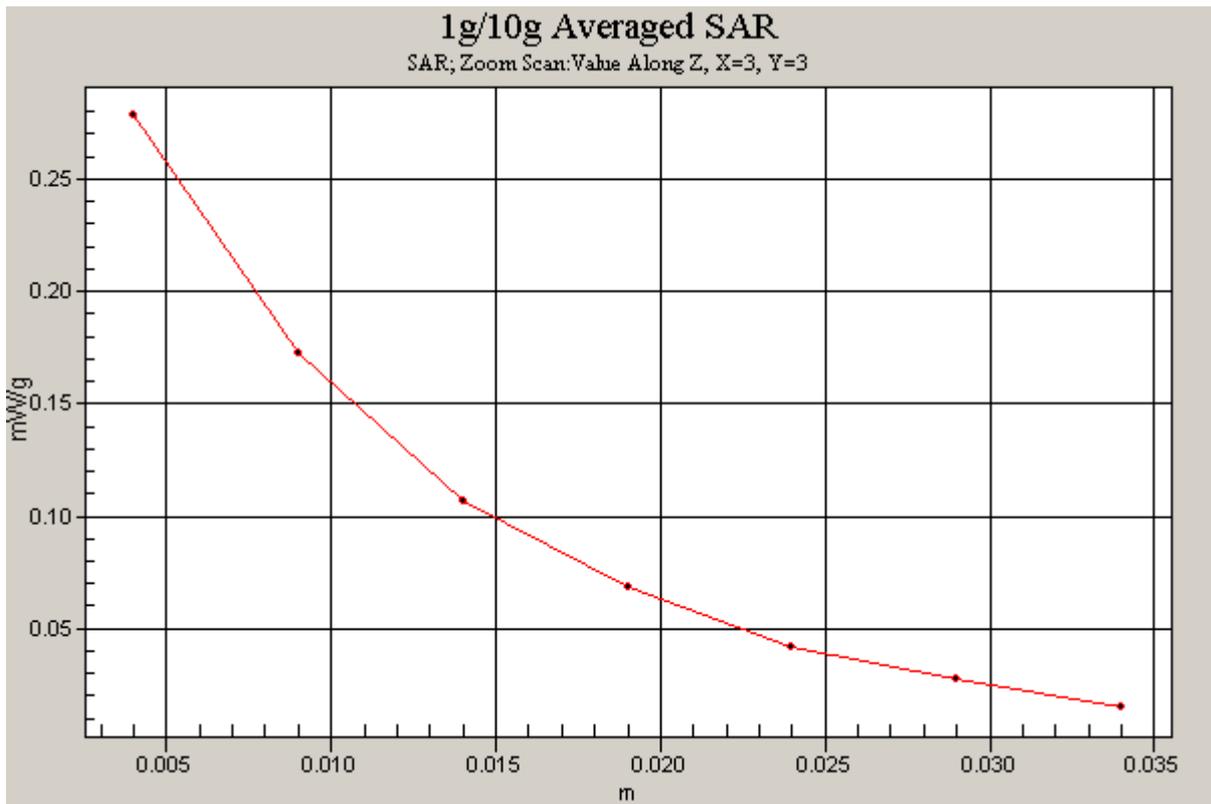


Figure 83 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 Channel 810)

### GSM 1900 Towards Ground Middle

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 51.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);

Electronics: DAE3 Sn536;

**Towards Ground Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.256 mW/g

**Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.07 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.345 W/kg

**SAR(1 g) = 0.221 mW/g; SAR(10 g) = 0.134 mW/g**

Maximum value of SAR (measured) = 0.240 mW/g

**Towards Ground Middle/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.07 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.265 W/kg

**SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.111 mW/g**

Maximum value of SAR (measured) = 0.186 mW/g

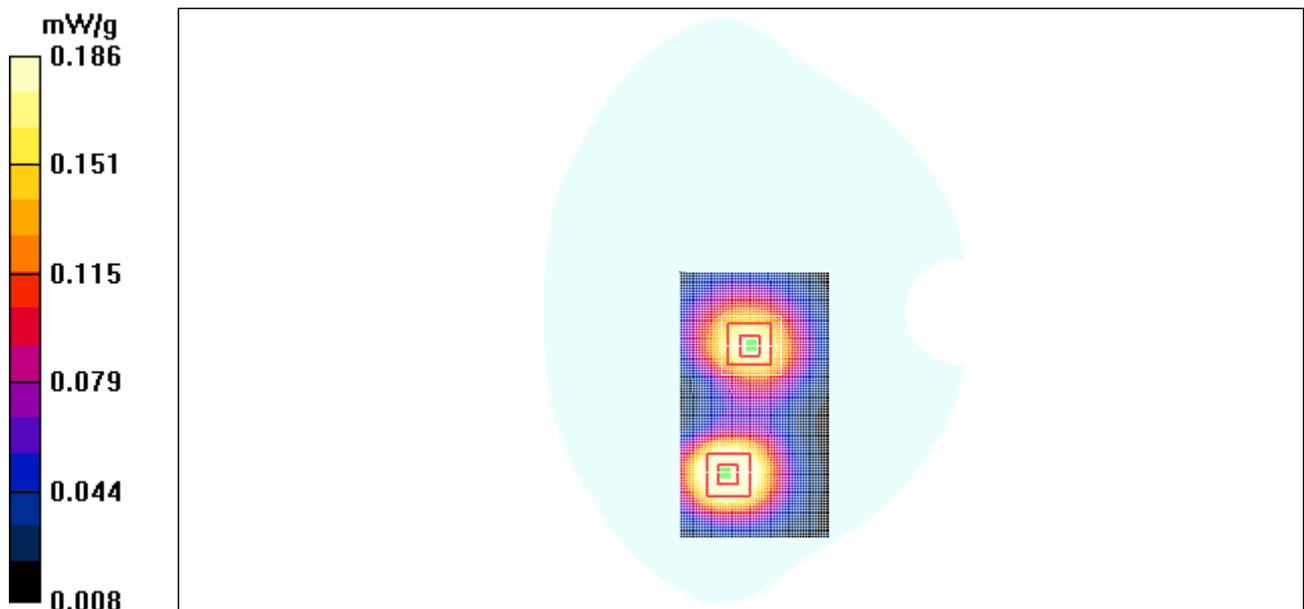


Figure 84 Body, Towards Ground, GSM 1900 Channel 661

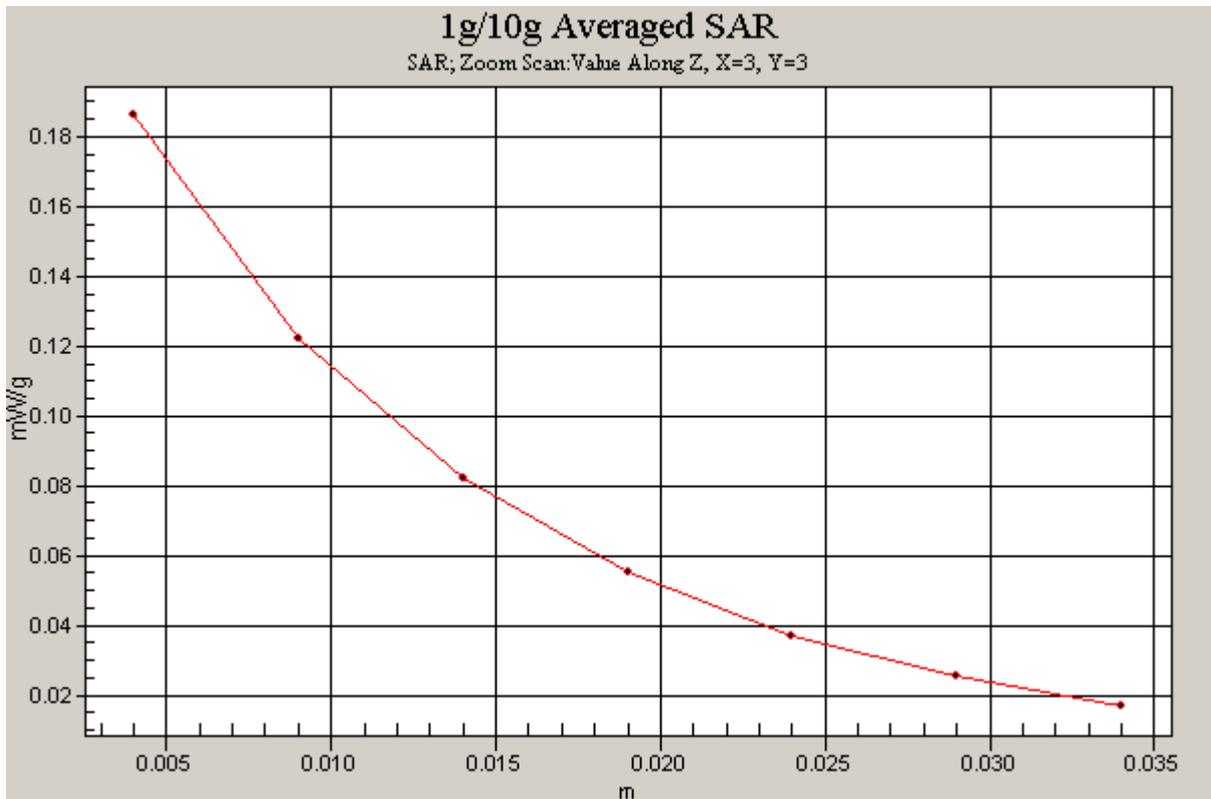
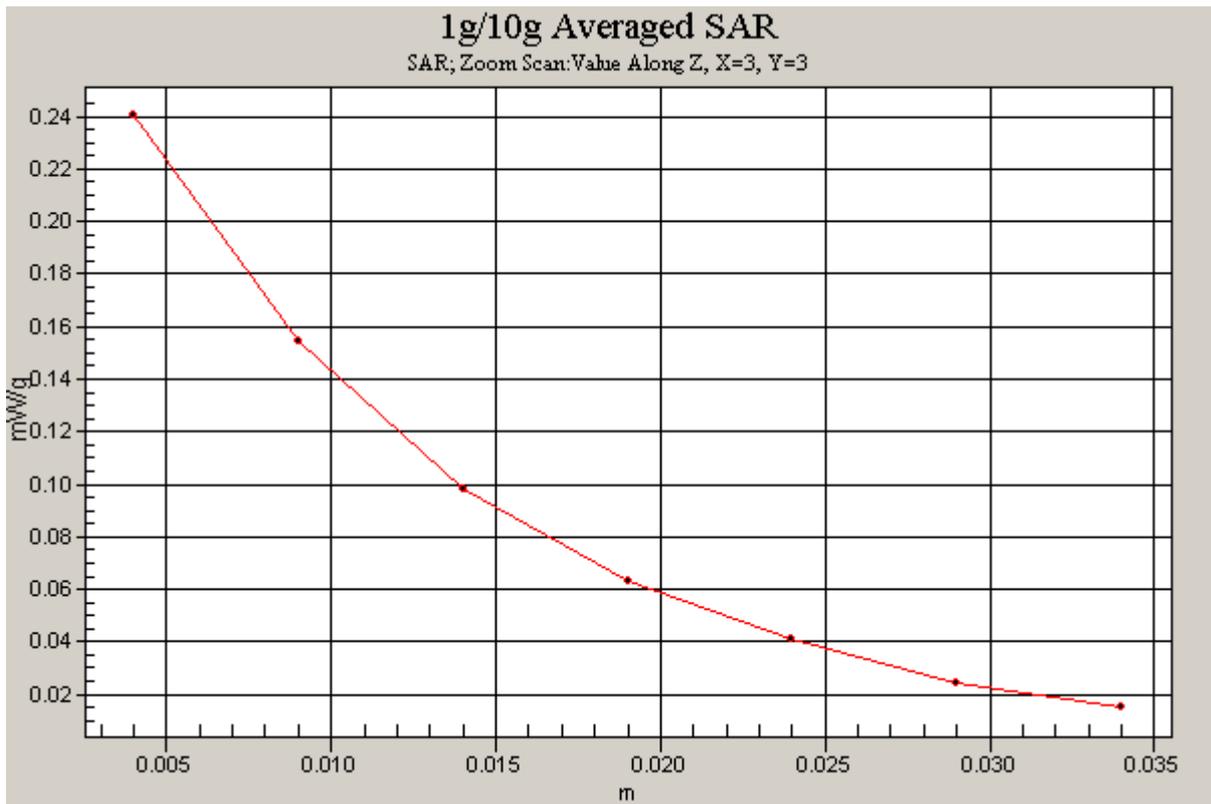


Figure 85 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 Channel 661)

### GSM 1900 Towards Ground Low

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);

Electronics: DAE3 Sn536;

**Towards Ground Low/Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.237 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.87 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 0.327 W/kg

**SAR(1 g) = 0.208 mW/g; SAR(10 g) = 0.126 mW/g**

Maximum value of SAR (measured) = 0.225 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.87 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 0.253 W/kg

**SAR(1 g) = 0.170 mW/g; SAR(10 g) = 0.110 mW/g**

Maximum value of SAR (measured) = 0.183 mW/g

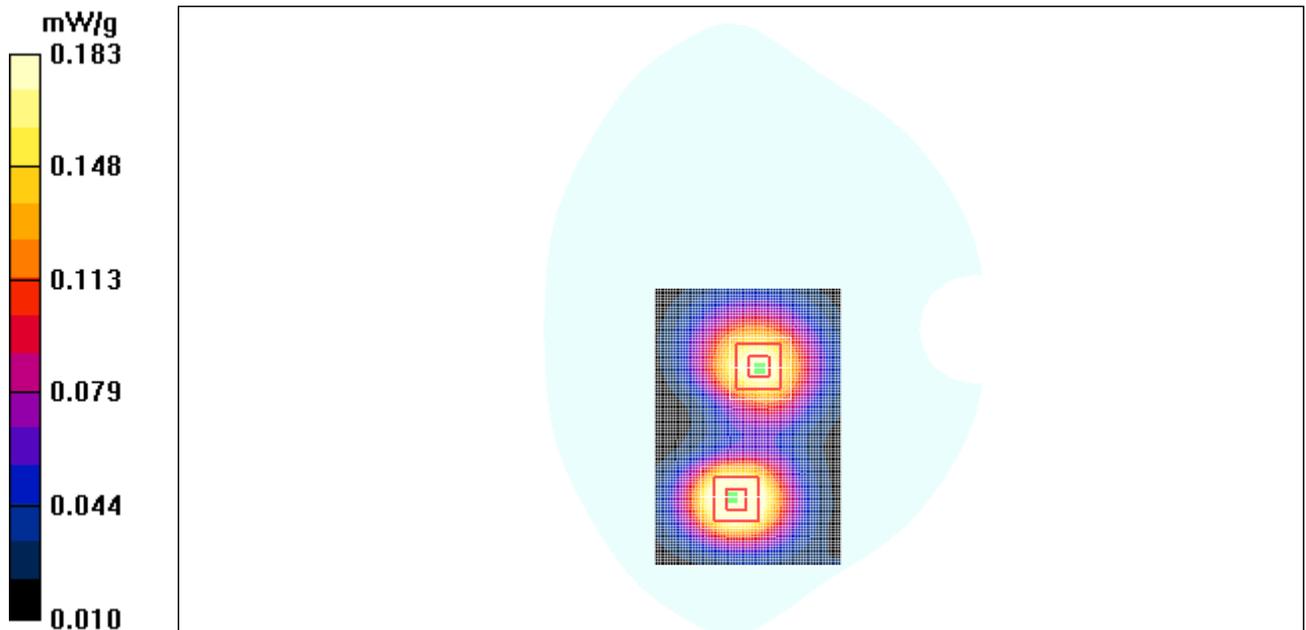


Figure 86 Body, Towards Ground, GSM 1900 Channel 512

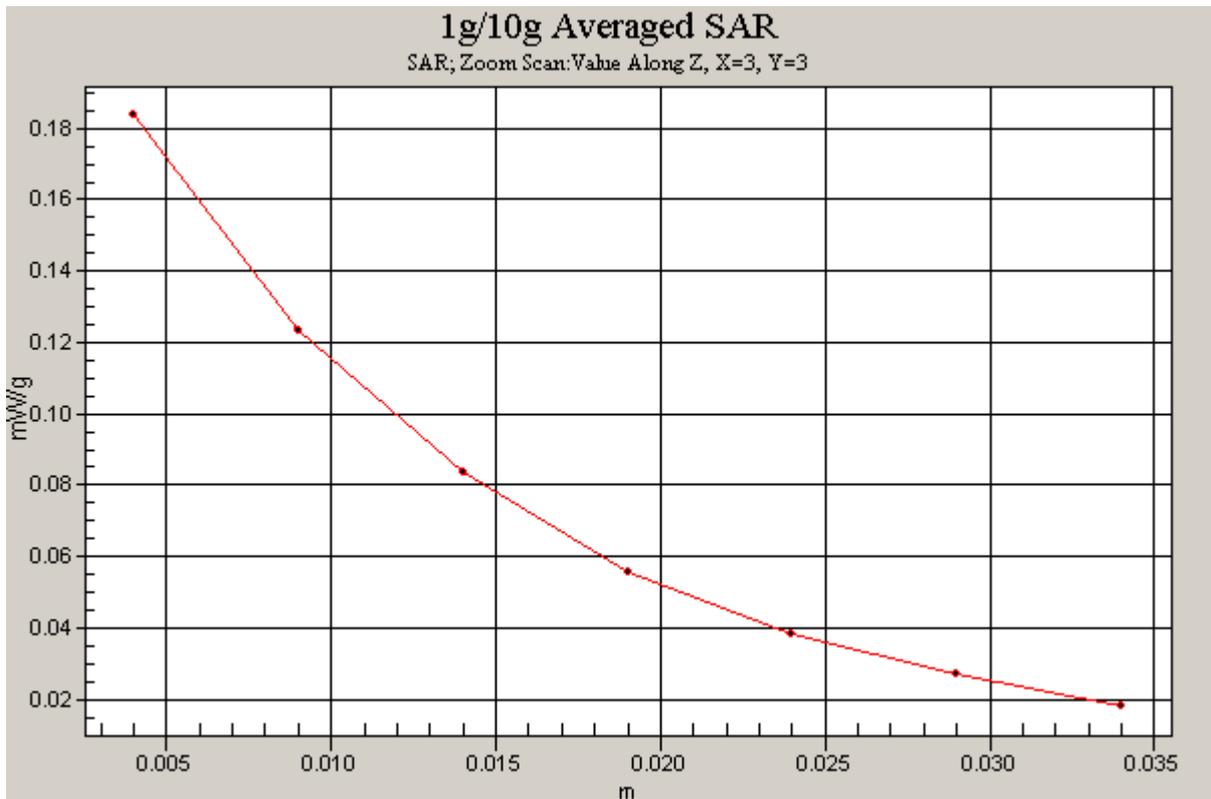
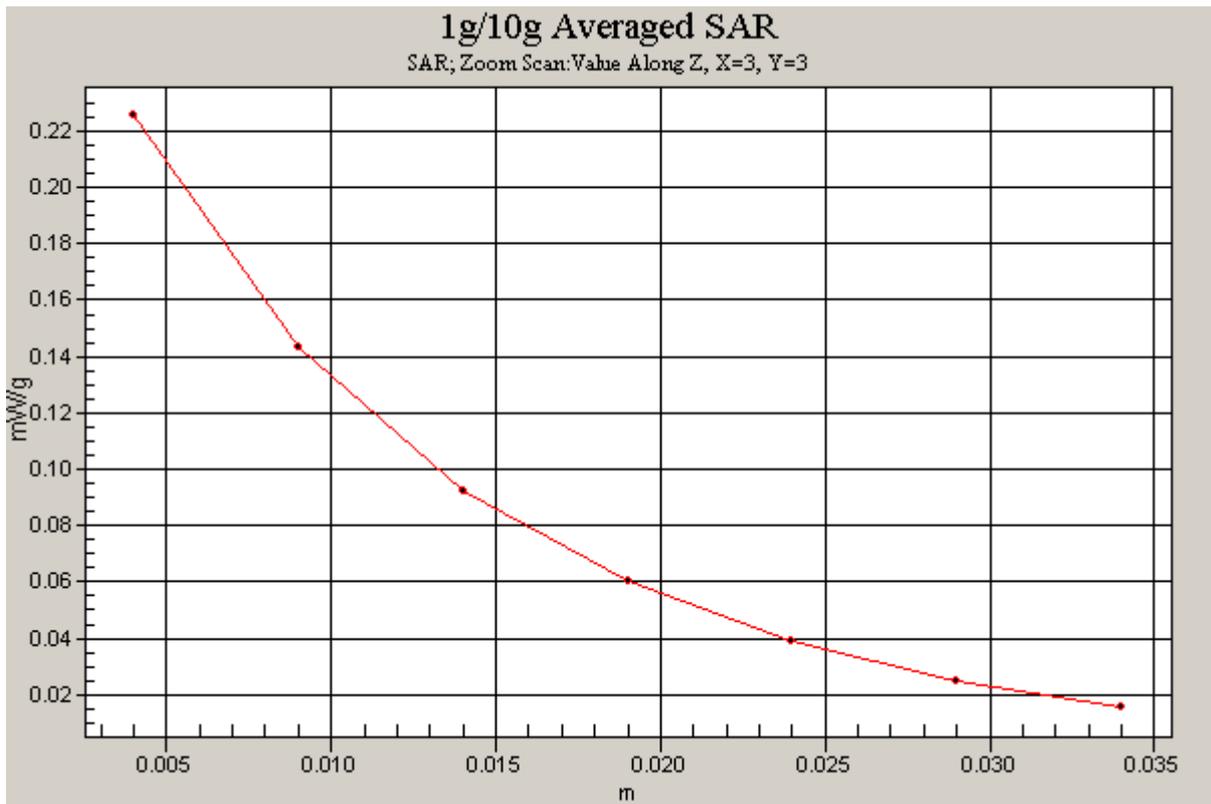


Figure 87 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 Channel 512)

### GSM 1900 Towards Phantom High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.58$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);

Electronics: DAE3 Sn536;

**Towards Phantom High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.225 mW/g

**Towards Phantom High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.42 V/m; Power Drift = -0.176 dB

Peak SAR (extrapolated) = 0.320 W/kg

**SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.122 mW/g**

Maximum value of SAR (measured) = 0.218 mW/g

**Towards Phantom High/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.42 V/m; Power Drift = -0.176 dB

Peak SAR (extrapolated) = 0.268 W/kg

**SAR(1 g) = 0.174 mW/g; SAR(10 g) = 0.111 mW/g**

Maximum value of SAR (measured) = 0.187 mW/g

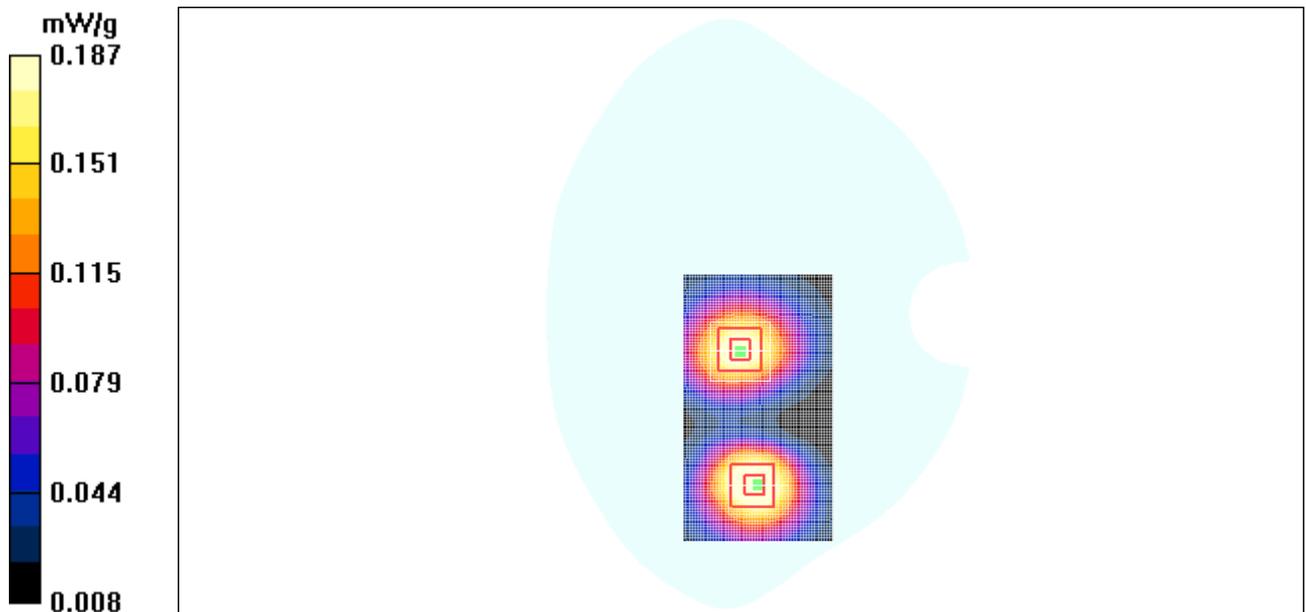


Figure 88 Body, Towards Phantom, GSM 1900 Channel 810

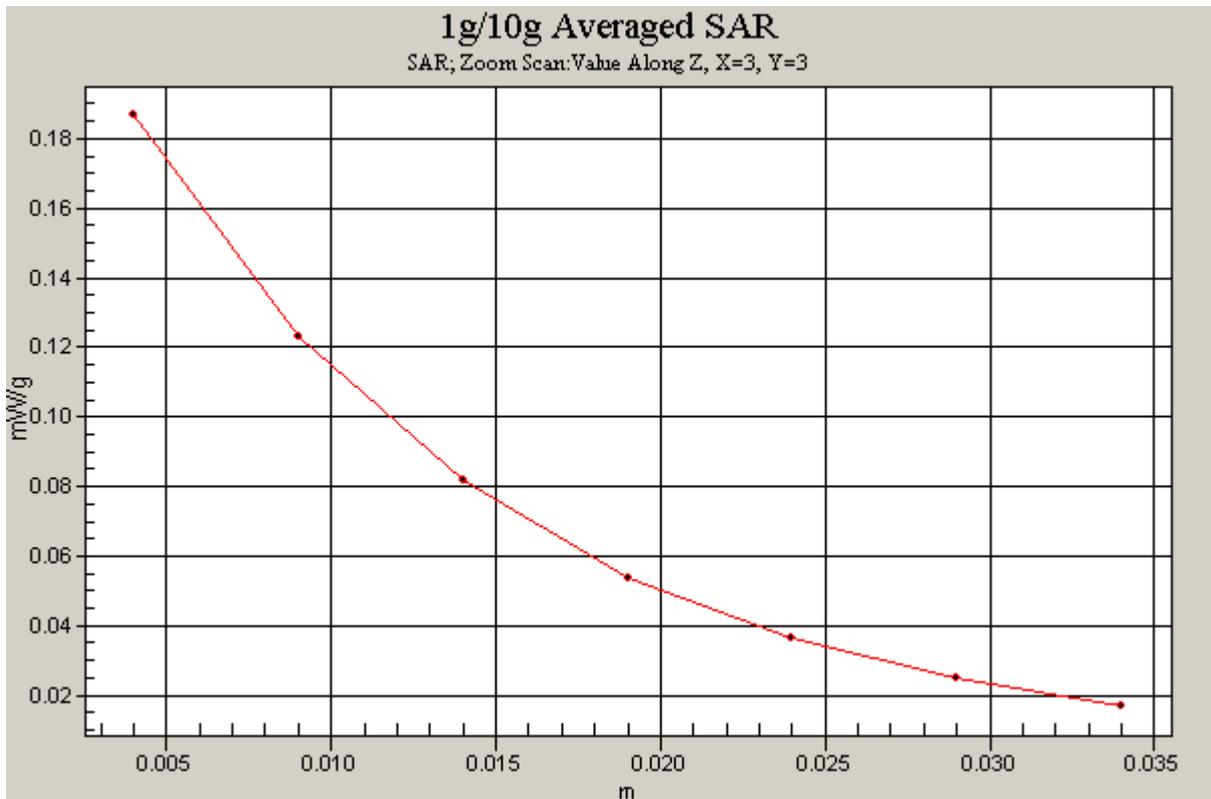
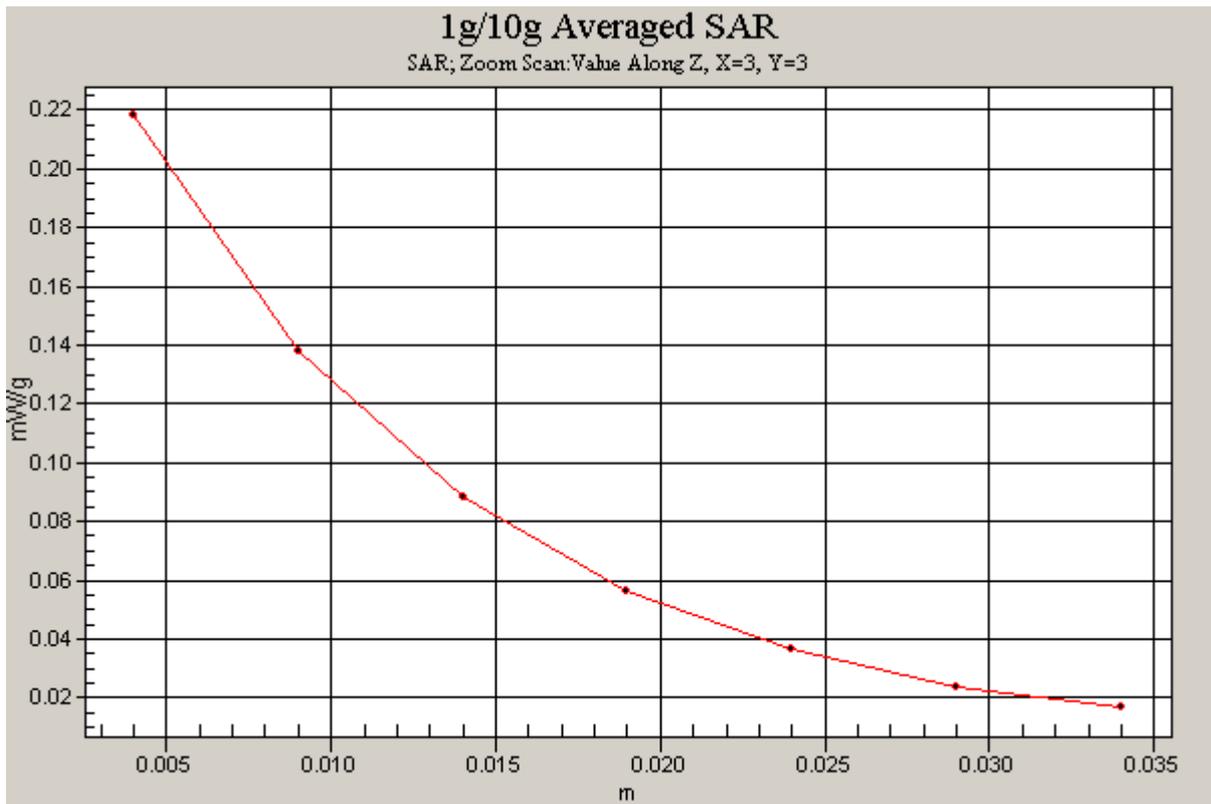


Figure 89 Z-Scan at power reference point (Body, Towards Phantom, GSM 1900 Channel 810)

### GSM 1900 Towards Phantom Middle

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 51.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);

Electronics: DAE3 Sn536;

**Towards Phantom Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.208 mW/g

**Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.24 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 0.288 W/kg

**SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.112 mW/g**

Maximum value of SAR (measured) = 0.200 mW/g

**Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.24 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 0.257 W/kg

**SAR(1 g) = 0.168 mW/g; SAR(10 g) = 0.107 mW/g**

Maximum value of SAR (measured) = 0.181 mW/g

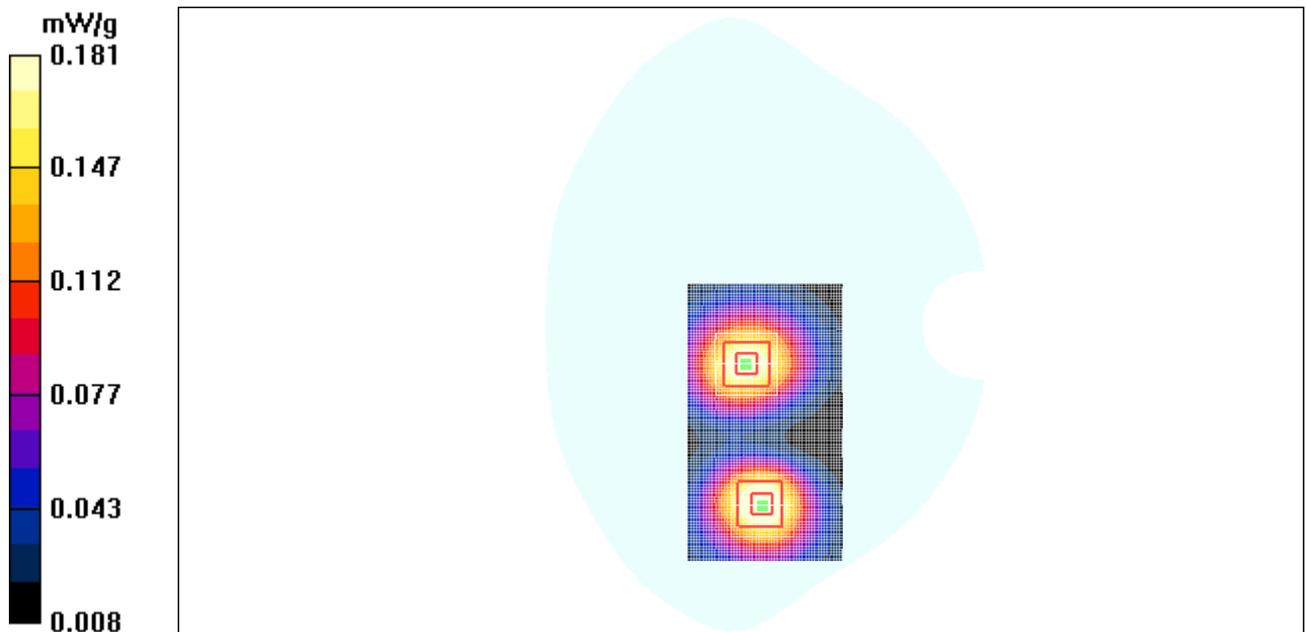


Figure 90 Body, Towards Phantom, GSM 1900 Channel 661

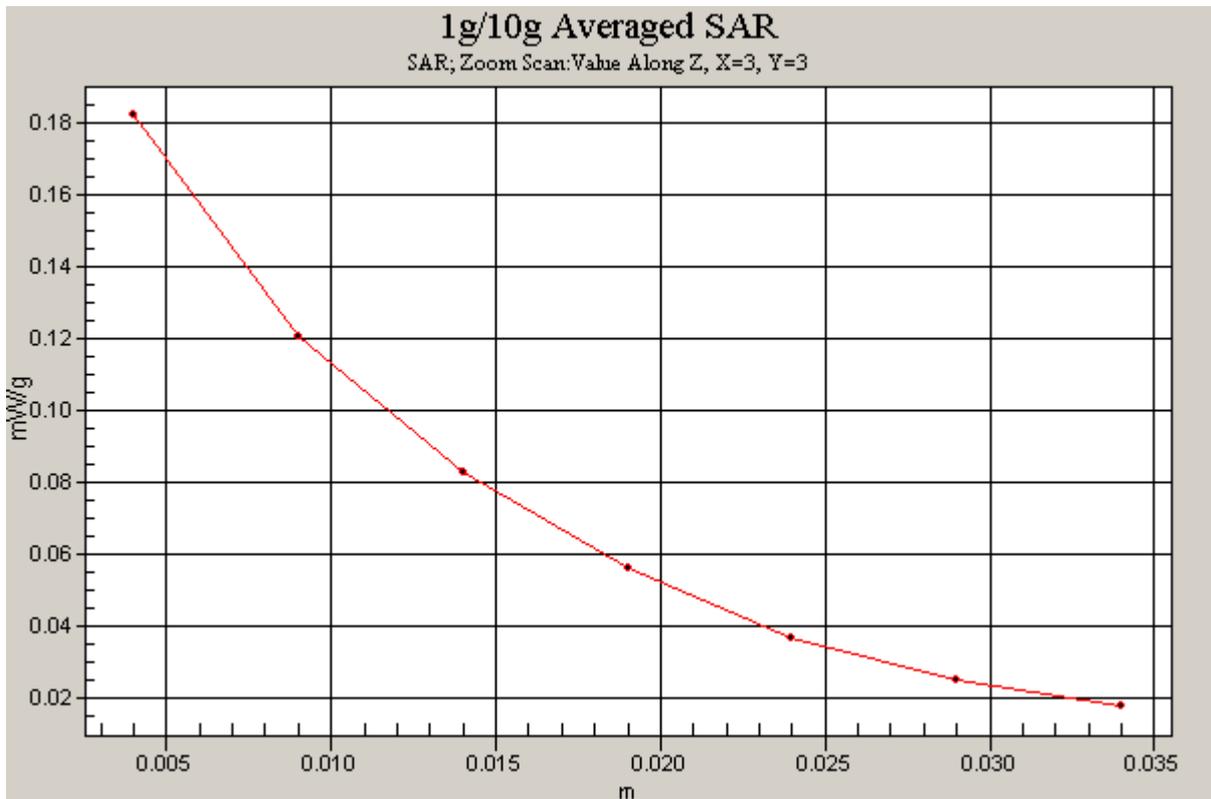
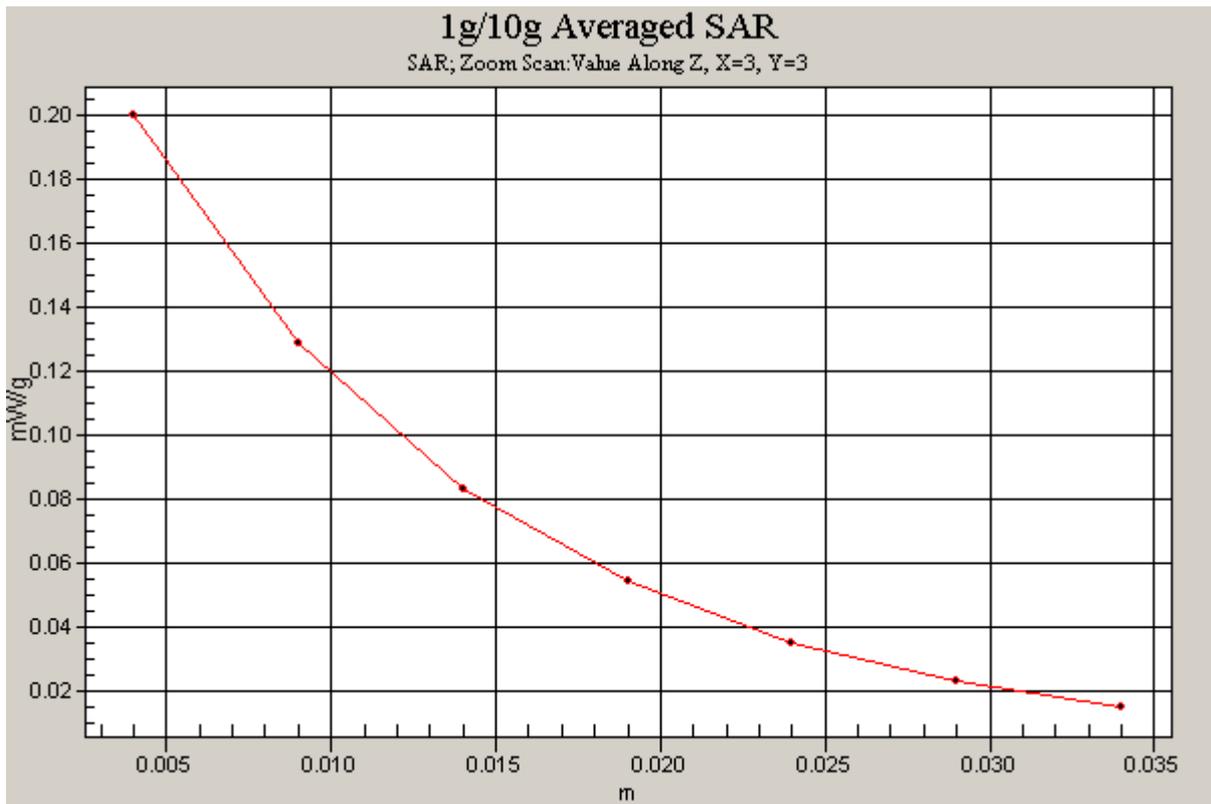


Figure 91 Z-Scan at power reference point (Body, Towards Phantom, GSM 1900 Channel 661)

### GSM 1900 Towards Phantom Low

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);

Electronics: DAE3 Sn536;

**Towards Phantom Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.192 mW/g

**Towards Phantom Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.04 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.269 W/kg

**SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.105 mW/g**

Maximum value of SAR (measured) = 0.187 mW/g

**Towards Phantom Low/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.04 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.248 W/kg

**SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.106 mW/g**

Maximum value of SAR (measured) = 0.178 mW/g

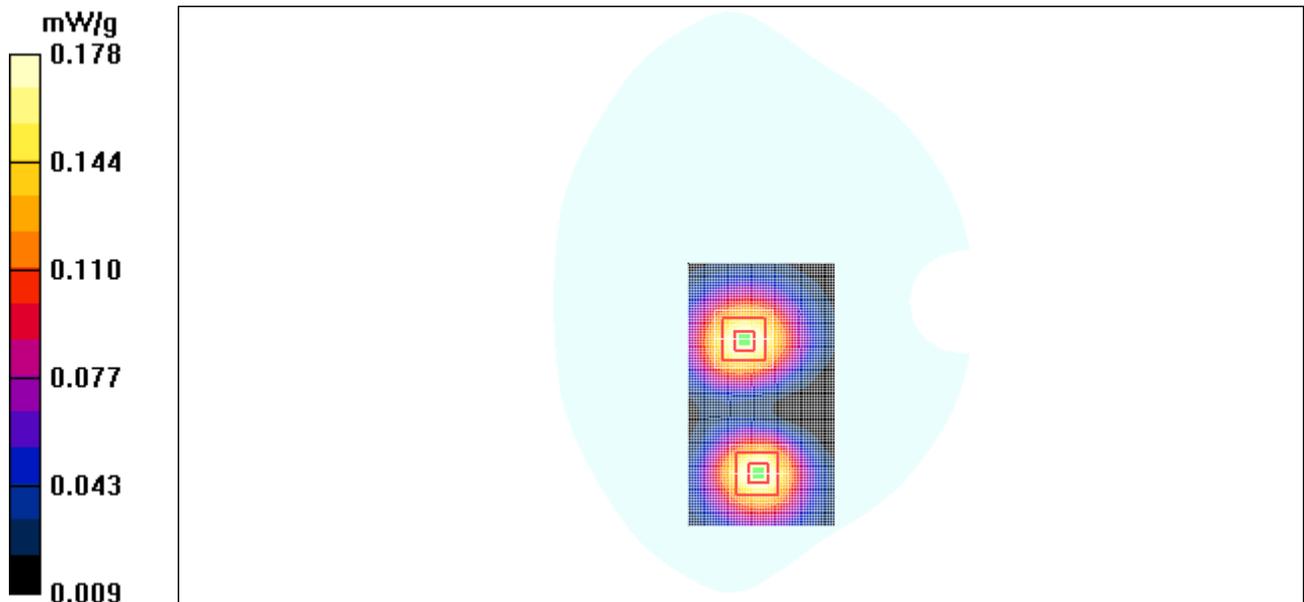


Figure 92 Body, Towards Phantom, GSM 1900 Channel 512

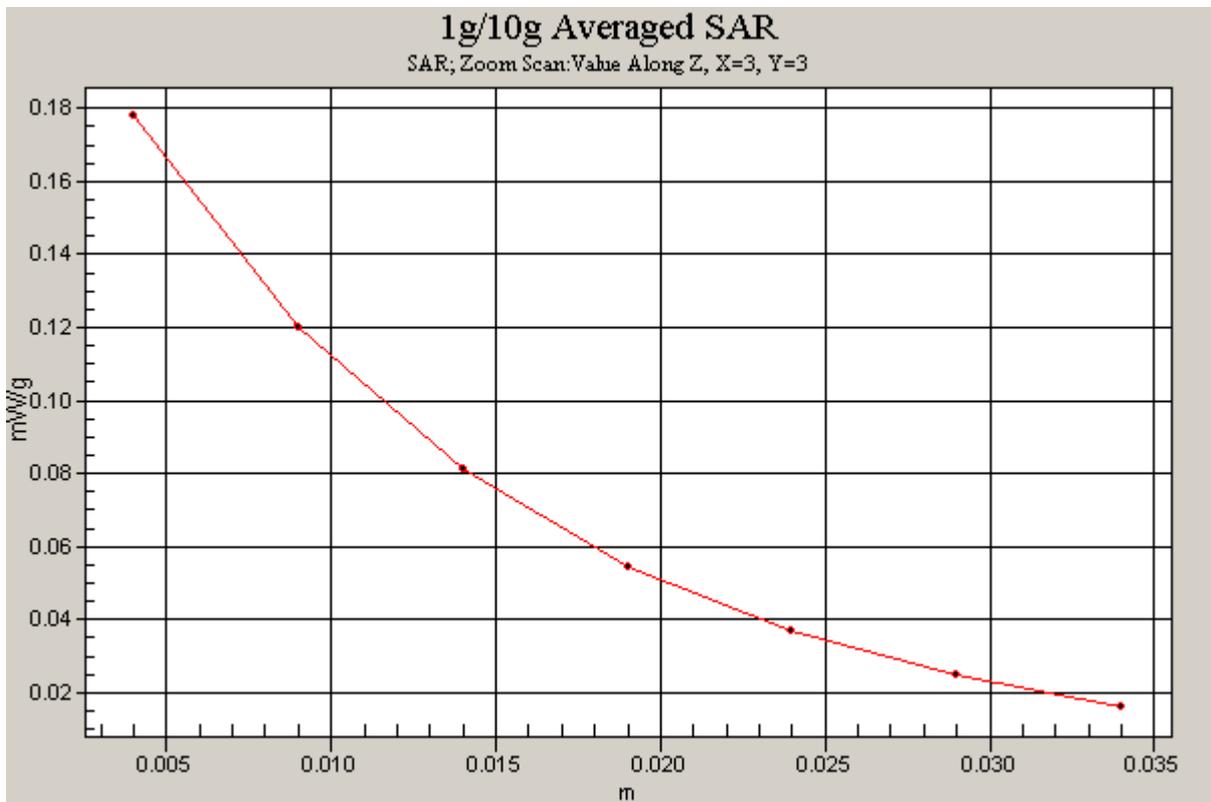
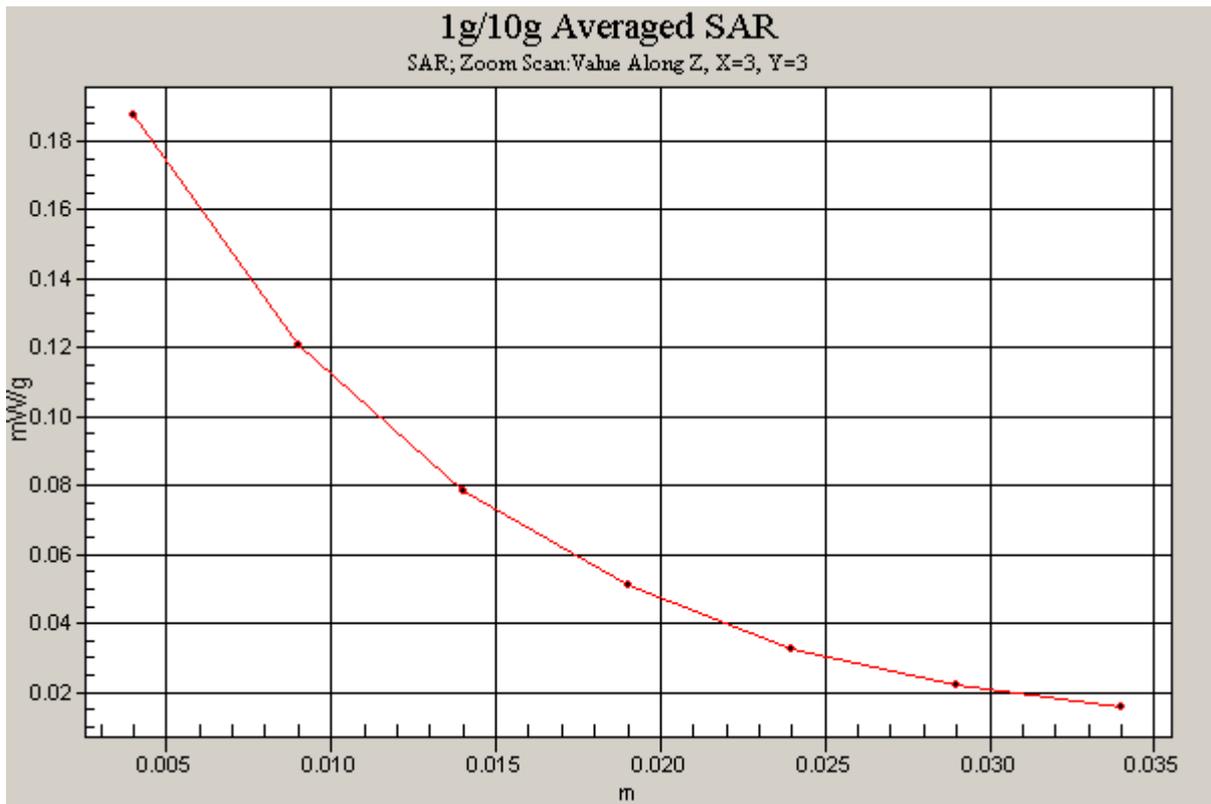


Figure 93 Z-Scan at power reference point (Body, Towards Ground, GSM 1900, Channel 512)

### GSM 1900 Earphone Towards Ground High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.58$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);

Electronics: DAE3 Sn536;

**Towards Ground High /Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.276 mW/g

**Towards Ground High /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.99 V/m; Power Drift = -0.166 dB

Peak SAR (extrapolated) = 0.398 W/kg

**SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.147 mW/g**

Maximum value of SAR (measured) = 0.268 mW/g

**Towards Ground High /Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.99 V/m; Power Drift = -0.166 dB

Peak SAR (extrapolated) = 0.261 W/kg

**SAR(1 g) = 0.169 mW/g; SAR(10 g) = 0.107 mW/g**

Maximum value of SAR (measured) = 0.182 mW/g

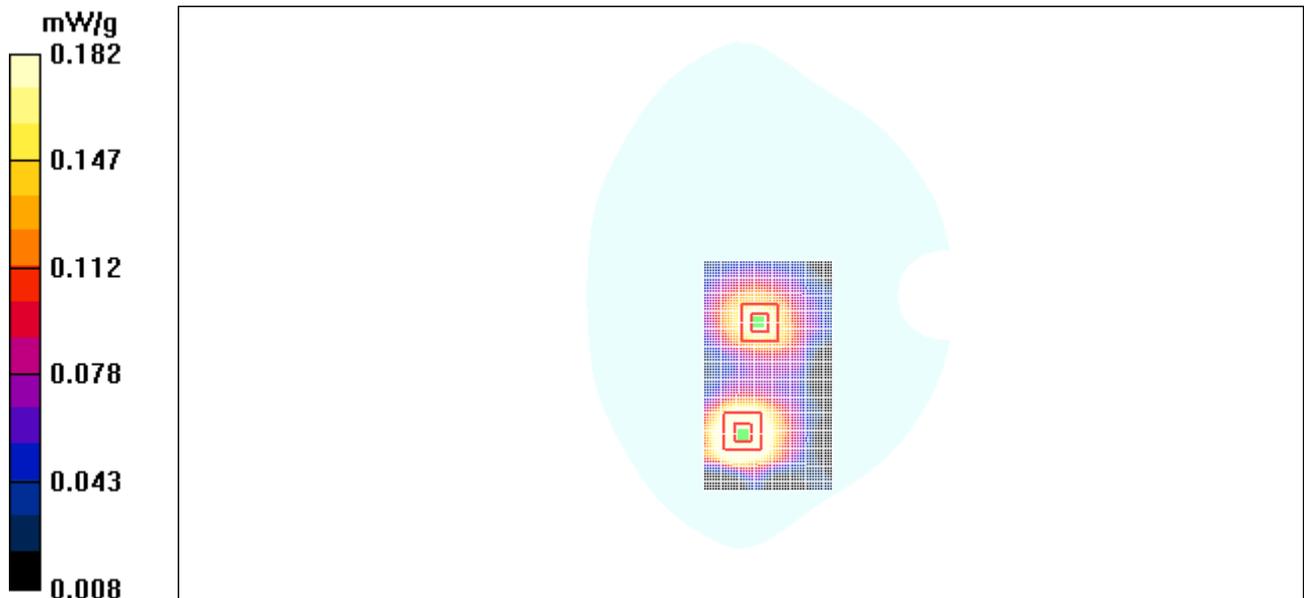


Figure 94 Body with Earphone, Towards Ground, GSM 1900, Channel 810

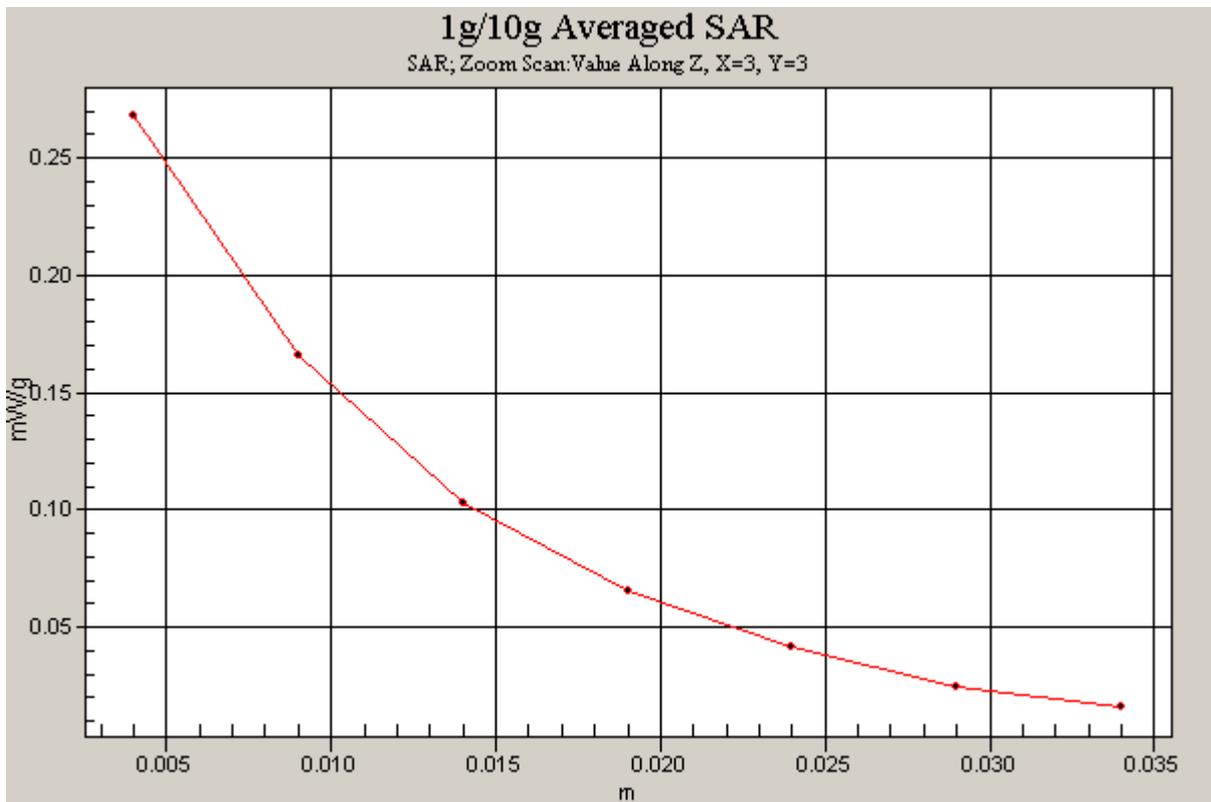
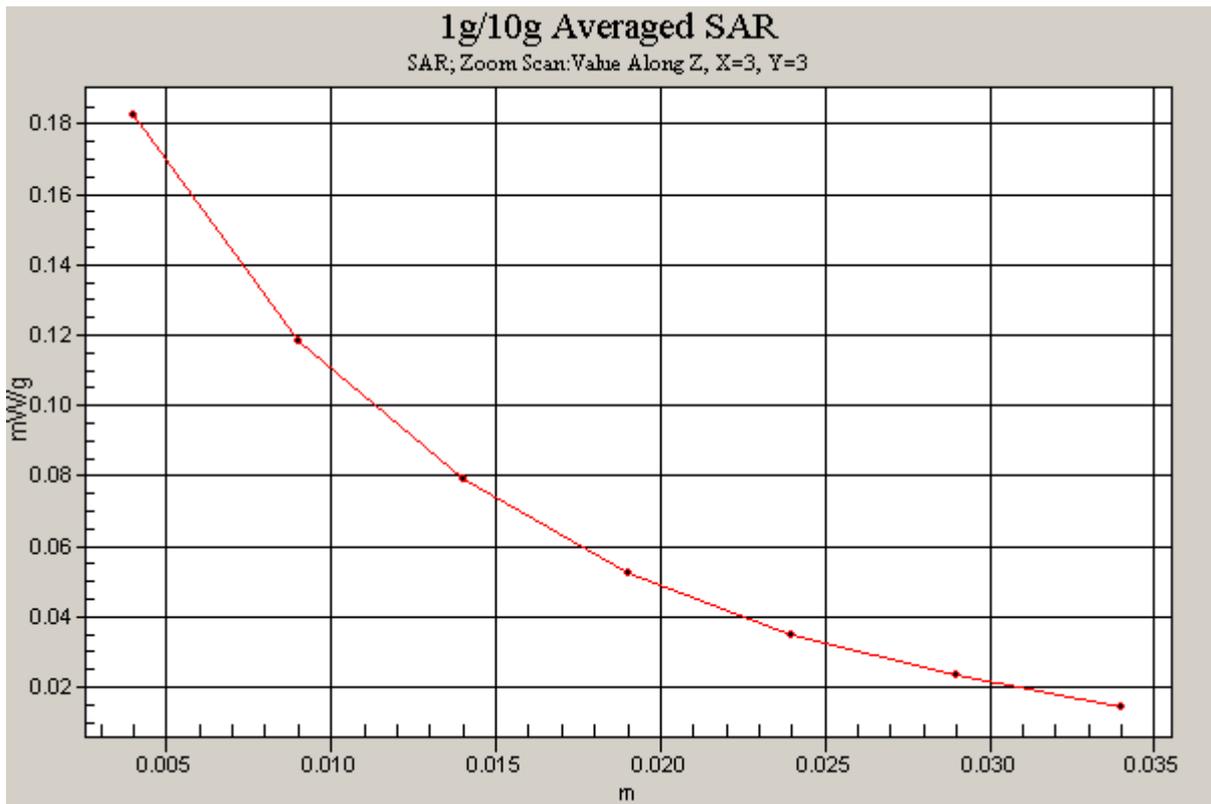


Figure 95 Z-Scan at power reference point (Body with Earphone, Towards Ground, GSM 1900, Channel 810)

### GSM 1900 GPRS Towards Ground High

Communication System: GSM 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.58$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);

Electronics: DAE3 Sn536;

**Towards Ground High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.548 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.0 V/m; Power Drift = -0.113 dB

Peak SAR (extrapolated) = 0.767 W/kg

**SAR(1 g) = 0.471 mW/g; SAR(10 g) = 0.280 mW/g**

Maximum value of SAR (measured) = 0.509 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.0 V/m; Power Drift = -0.113 dB

Peak SAR (extrapolated) = 0.542 W/kg

**SAR(1 g) = 0.347 mW/g; SAR(10 g) = 0.219 mW/g**

Maximum value of SAR (measured) = 0.375 mW/g

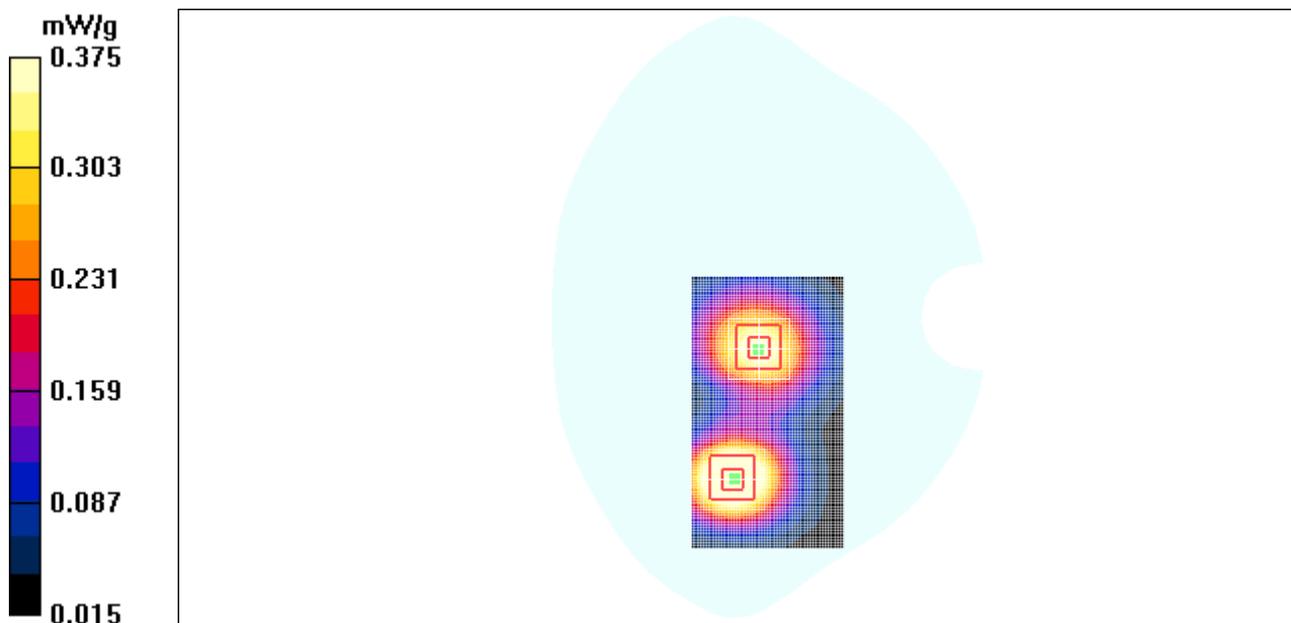


Figure 96 Body, Towards Ground, GSM 1900 GPRS, Channel 810

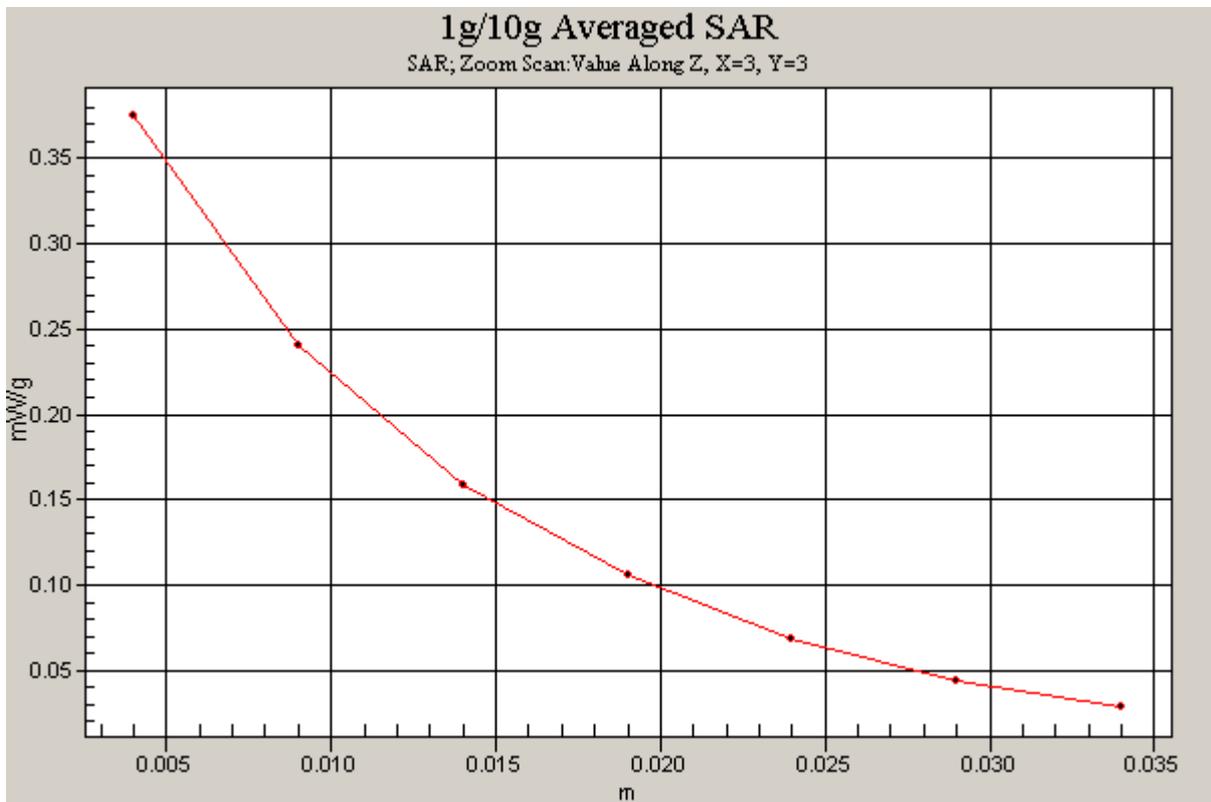
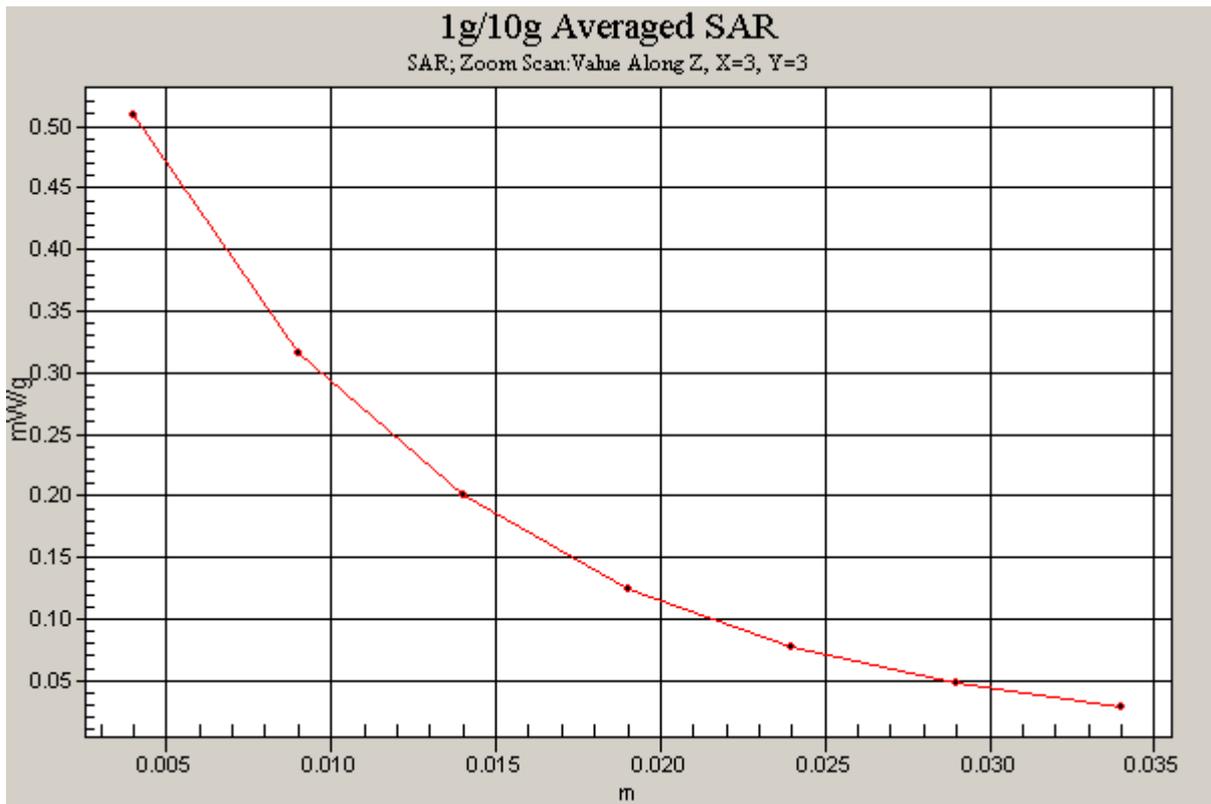


Figure 97 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 GPRS, Channel 810)

### GSM 1900 GPRS Towards Ground Middle

Communication System: GSM 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 51.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);

Electronics: DAE3 Sn536;

**Towards Ground Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.527 mW/g

**Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.720 W/kg

**SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.266 mW/g**

Maximum value of SAR (measured) = 0.482 mW/g

**Towards Ground Middle/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.514 W/kg

**SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.213 mW/g**

Maximum value of SAR (measured) = 0.360 mW/g

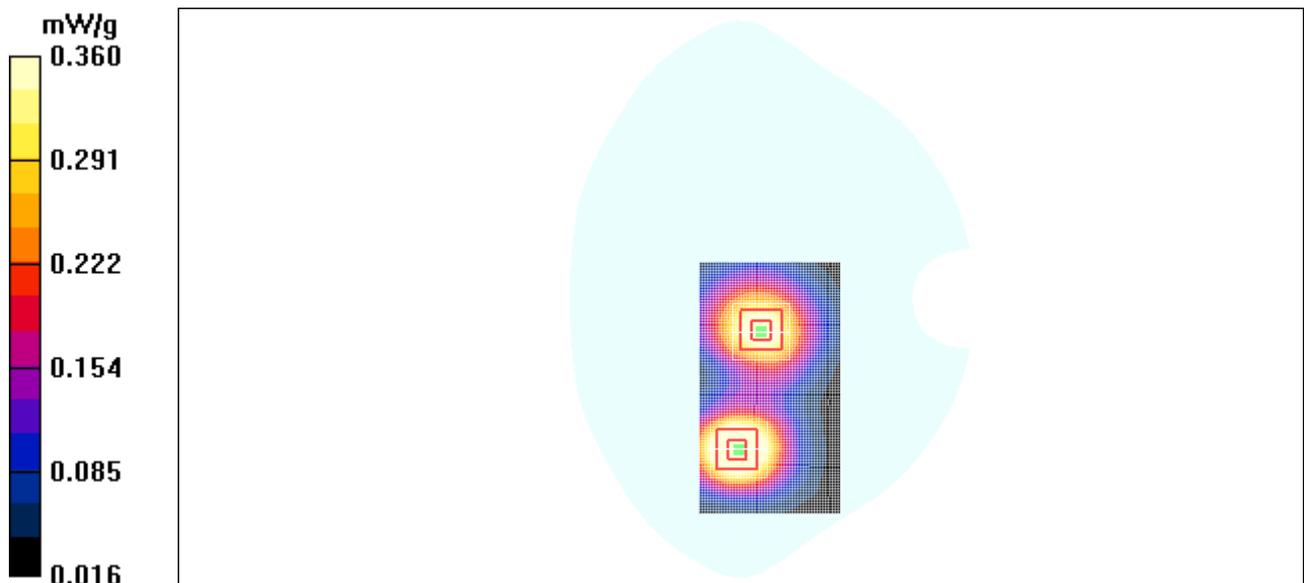


Figure 98 Body, Towards Ground, GSM 1900 GPRS Channel 661

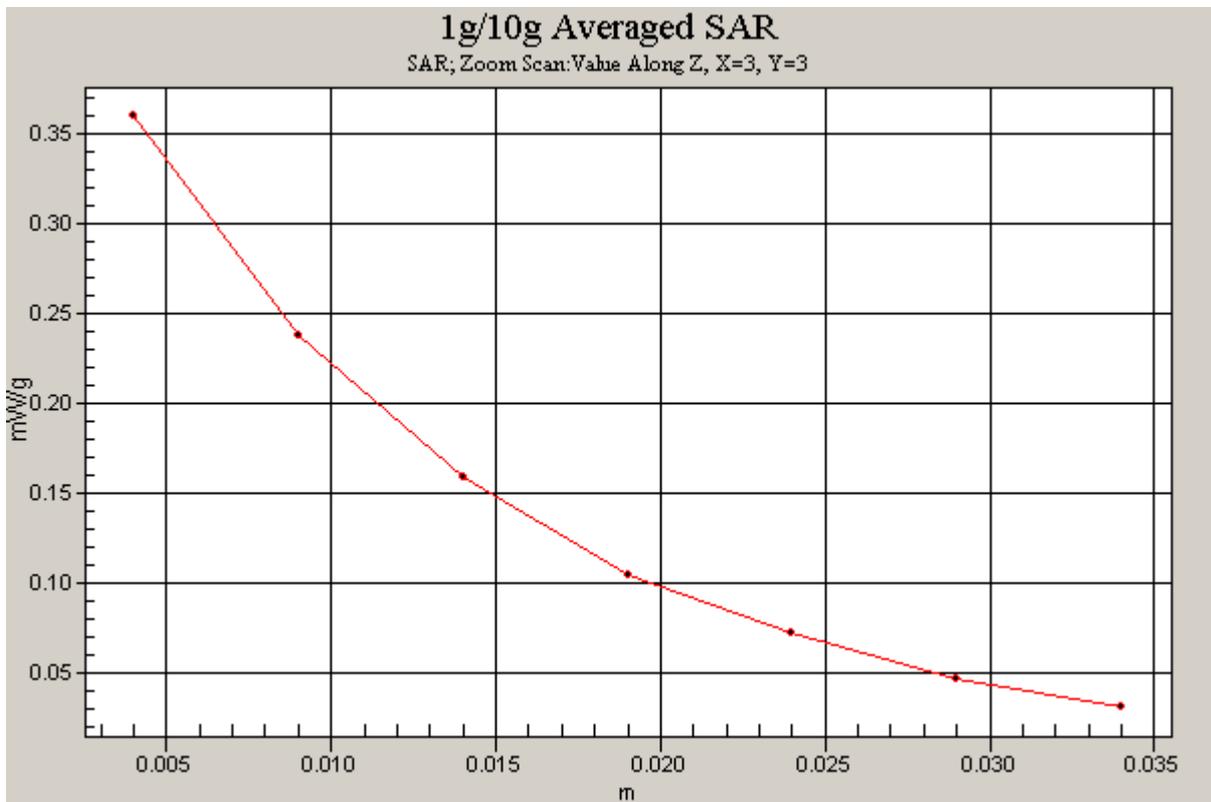
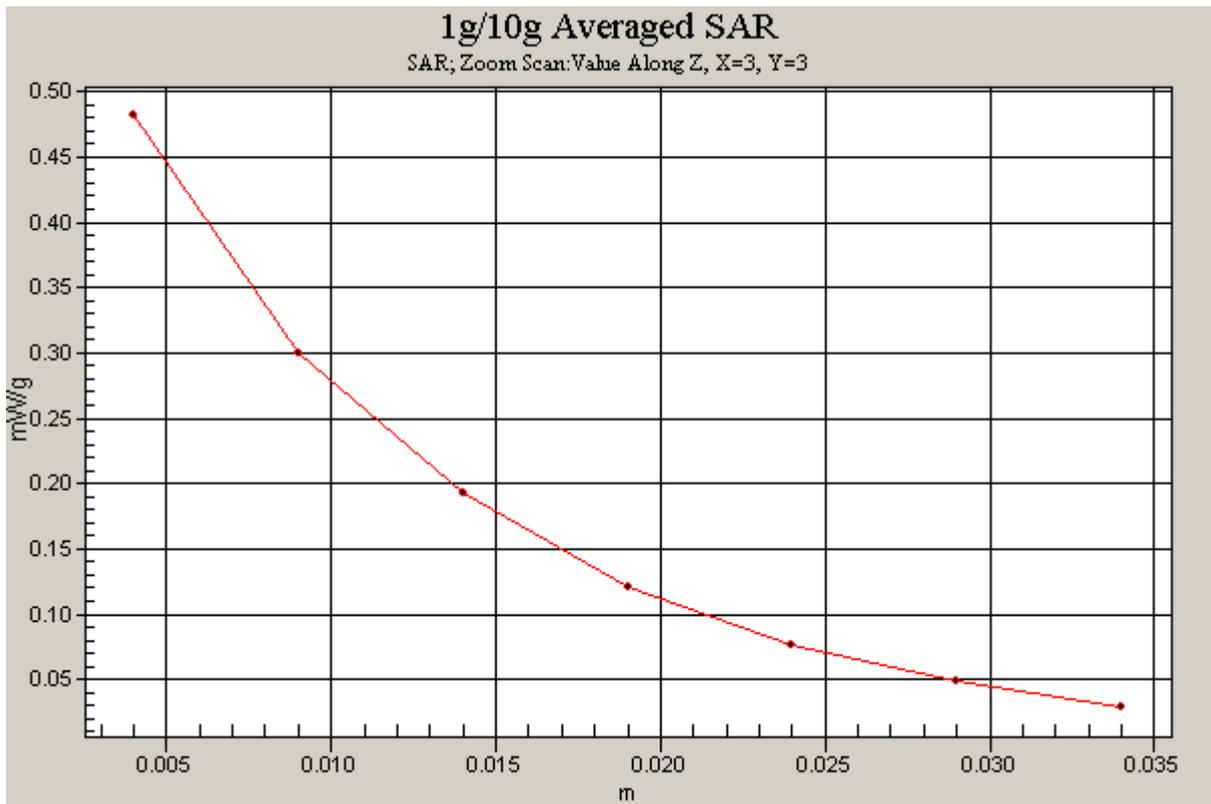


Figure 99 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 GPRS Channel 661)

**GSM 1900 GPRS Towards Ground Low**

Communication System: GSM 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4  
Communication System: GSM 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4  
Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);  
Electronics: DAE3 Sn536;

**Towards Ground Low/Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.458 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.624 W/kg

**SAR(1 g) = 0.391 mW/g; SAR(10 g) = 0.233 mW/g**

Maximum value of SAR (measured) = 0.425 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.487 W/kg

**SAR(1 g) = 0.315 mW/g; SAR(10 g) = 0.201 mW/g**

Maximum value of SAR (measured) = 0.339 mW/g

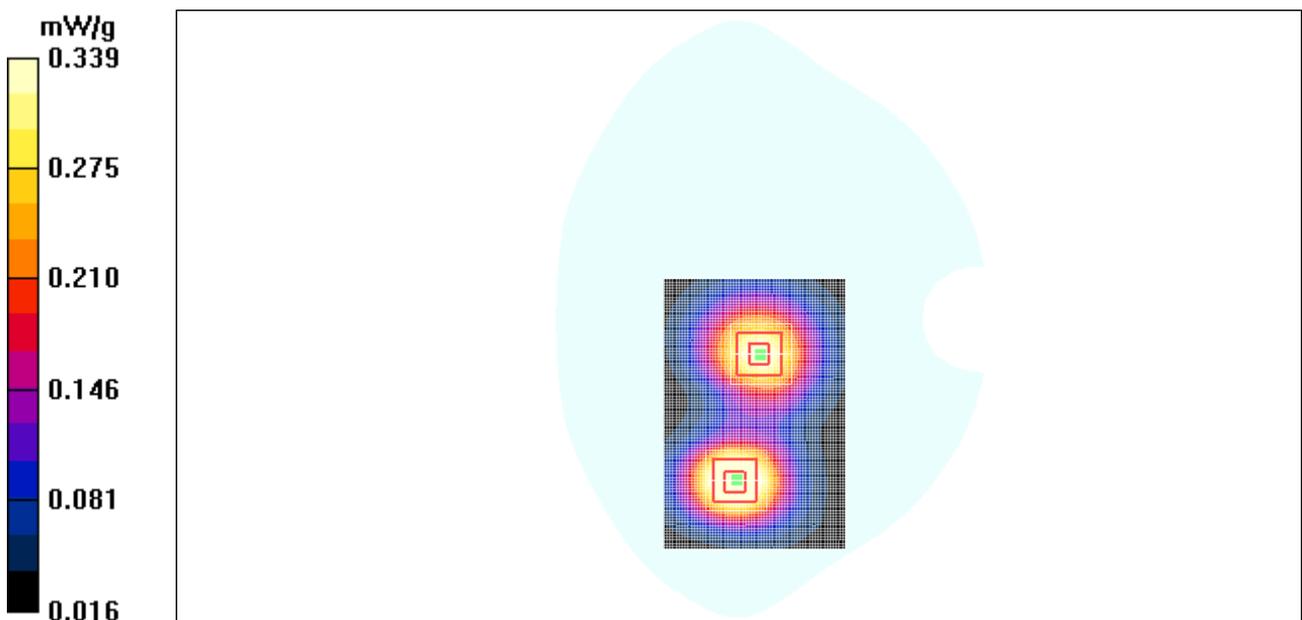


Figure 100 Body, Towards Ground, GSM 1900 GPRS Channel 512

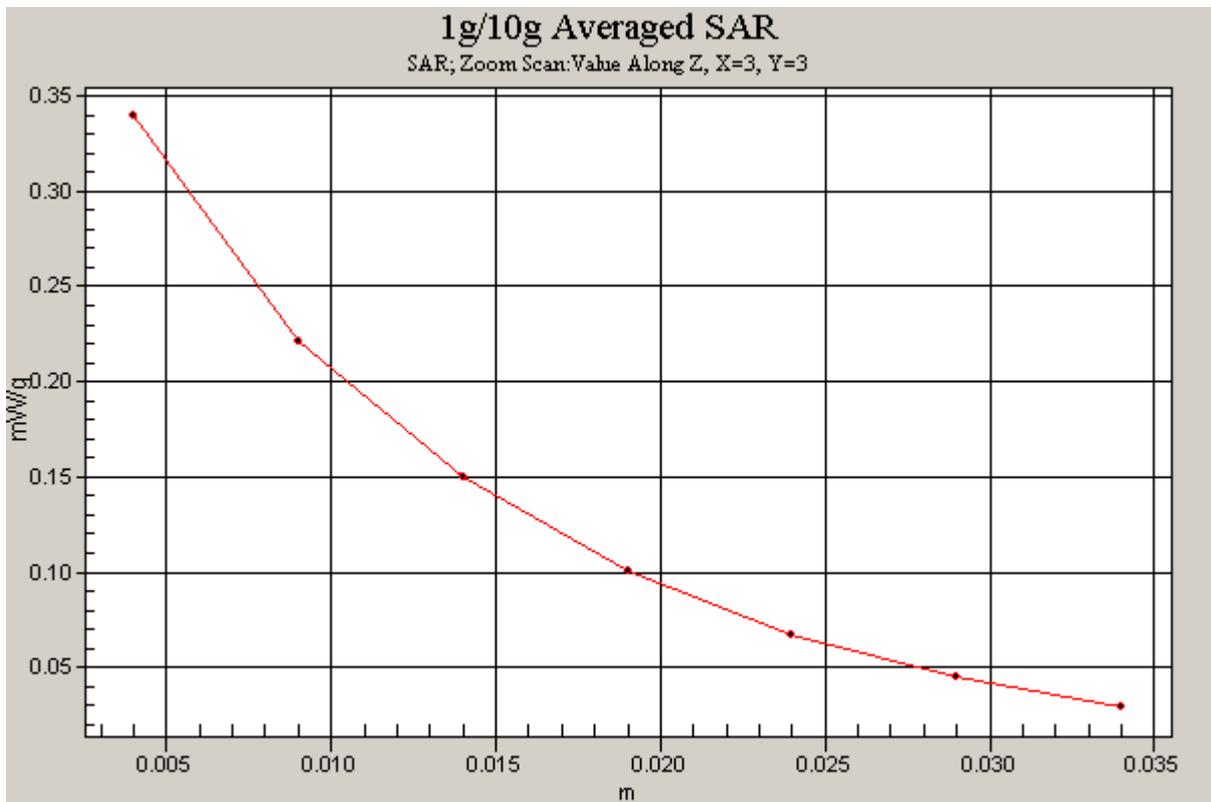
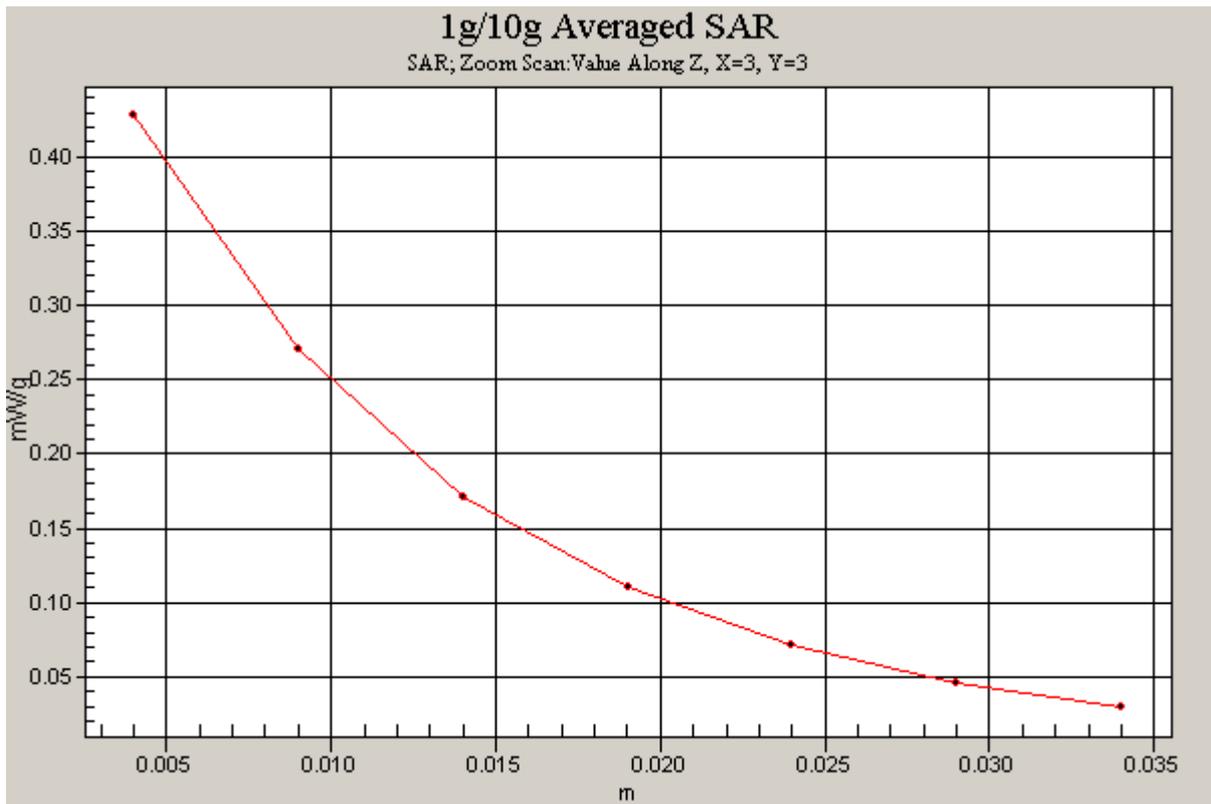


Figure 101 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 GPRS Channel 512)

### GSM 1900 GPRS Towards Phantom High

Communication System: GSM 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.58$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);

Electronics: DAE3 Sn536;

**Towards Phantom High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.528 mW/g

**Towards Phantom High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = -0.172 dB

Peak SAR (extrapolated) = 0.757 W/kg

**SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.281 mW/g**

Maximum value of SAR (measured) = 0.513 mW/g

**Towards Phantom High/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = -0.172 dB

Peak SAR (extrapolated) = 0.623 W/kg

**SAR(1 g) = 0.406 mW/g; SAR(10 g) = 0.255 mW/g**

Maximum value of SAR (measured) = 0.435 mW/g

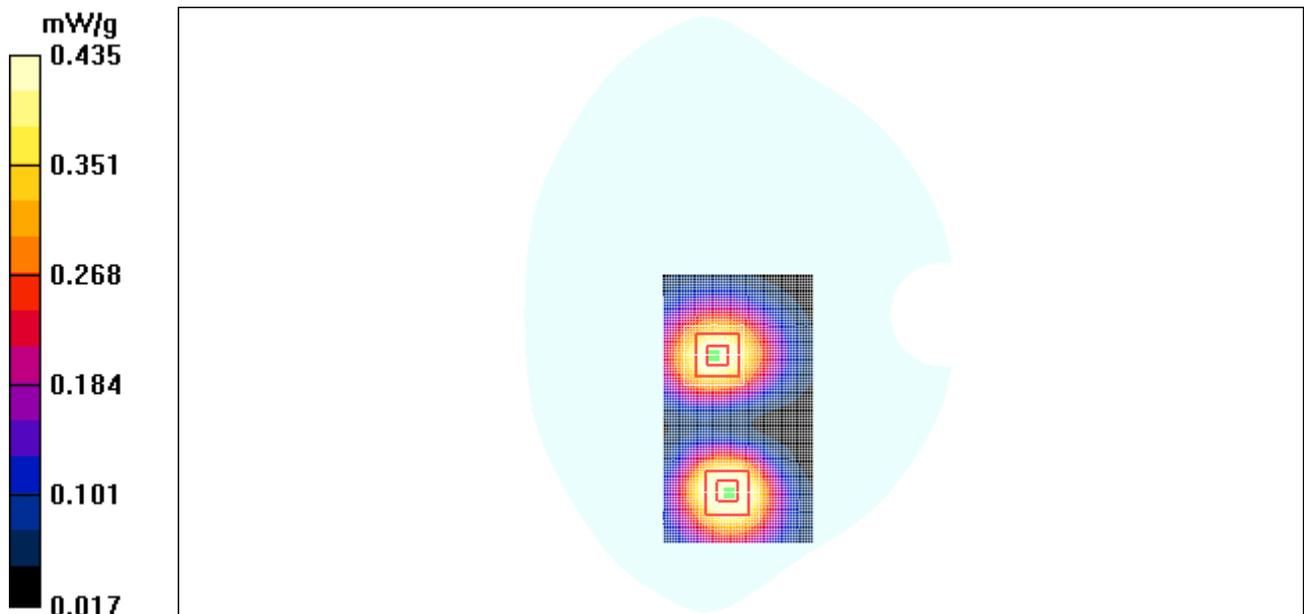


Figure 102 Body, Towards Phantom, GSM 1900 GPRS, Channel 810

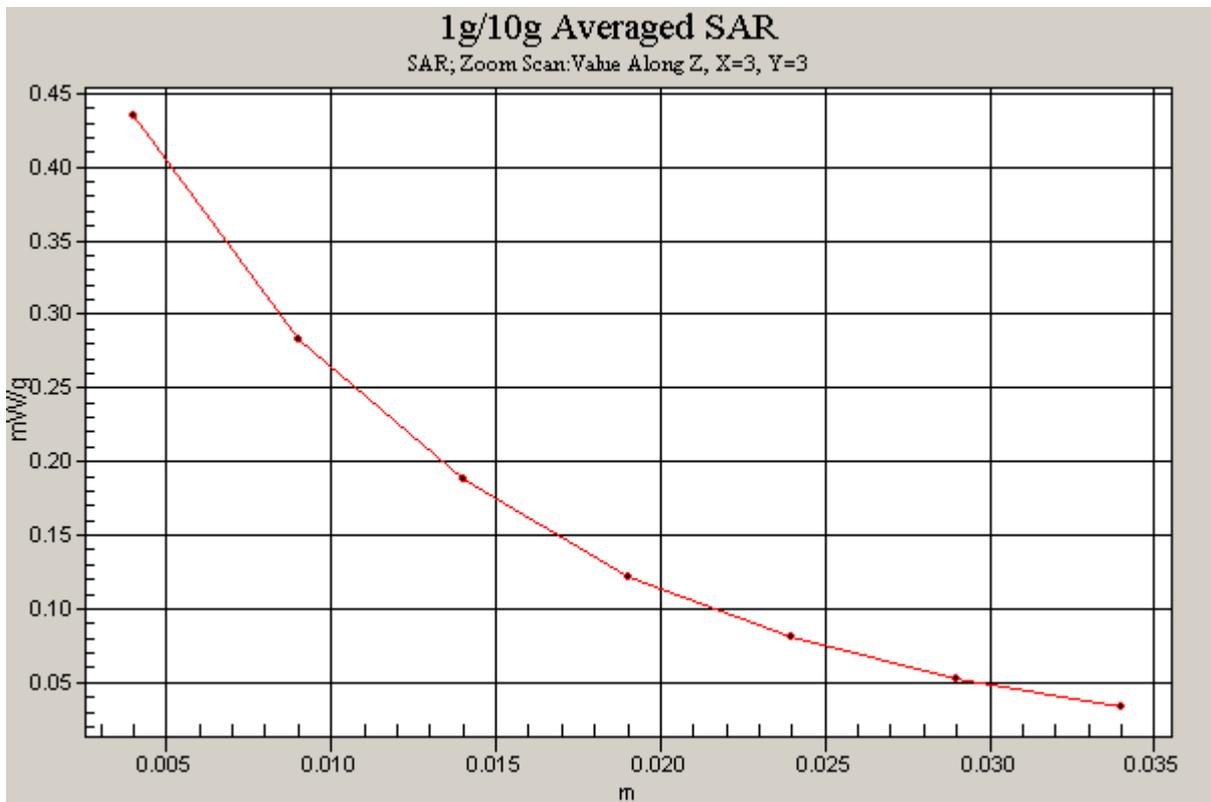
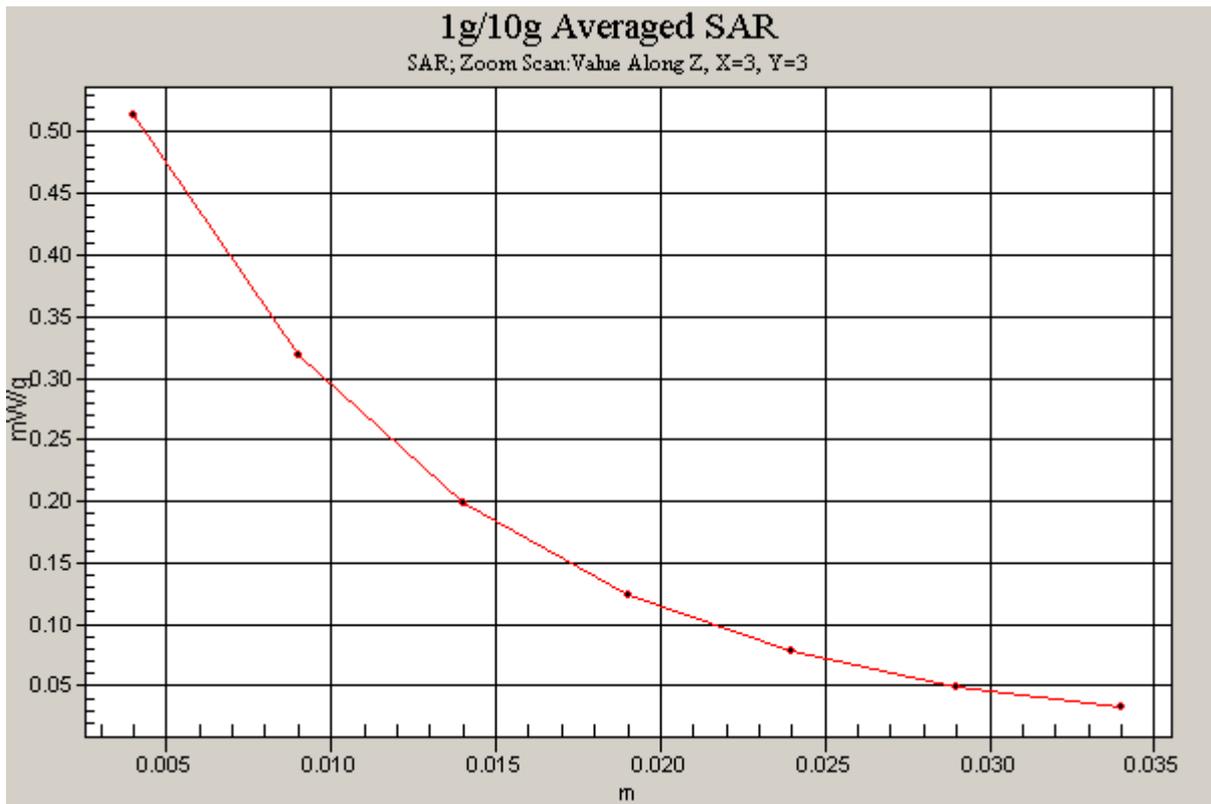


Figure 103 Z-Scan at power reference point (Body, Towards Phantom, GSM 1900 GPRS, Channel 810)

### GSM 1900 GPRS Towards Phantom Middle

Communication System: GSM 1900+GPRS(2Up); Frequency: 1880 MHz;Duty Cycle: 1:4

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 51.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);

Electronics: DAE3 Sn536;

**Towards Phantom Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.443 mW/g

**Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = -0.135 dB

Peak SAR (extrapolated) = 0.624 W/kg

**SAR(1 g) = 0.389 mW/g; SAR(10 g) = 0.233 mW/g**

Maximum value of SAR (measured) = 0.424 mW/g

**Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = -0.135 dB

Peak SAR (extrapolated) = 0.546 W/kg

**SAR(1 g) = 0.352 mW/g; SAR(10 g) = 0.222 mW/g**

Maximum value of SAR (measured) = 0.379 mW/g

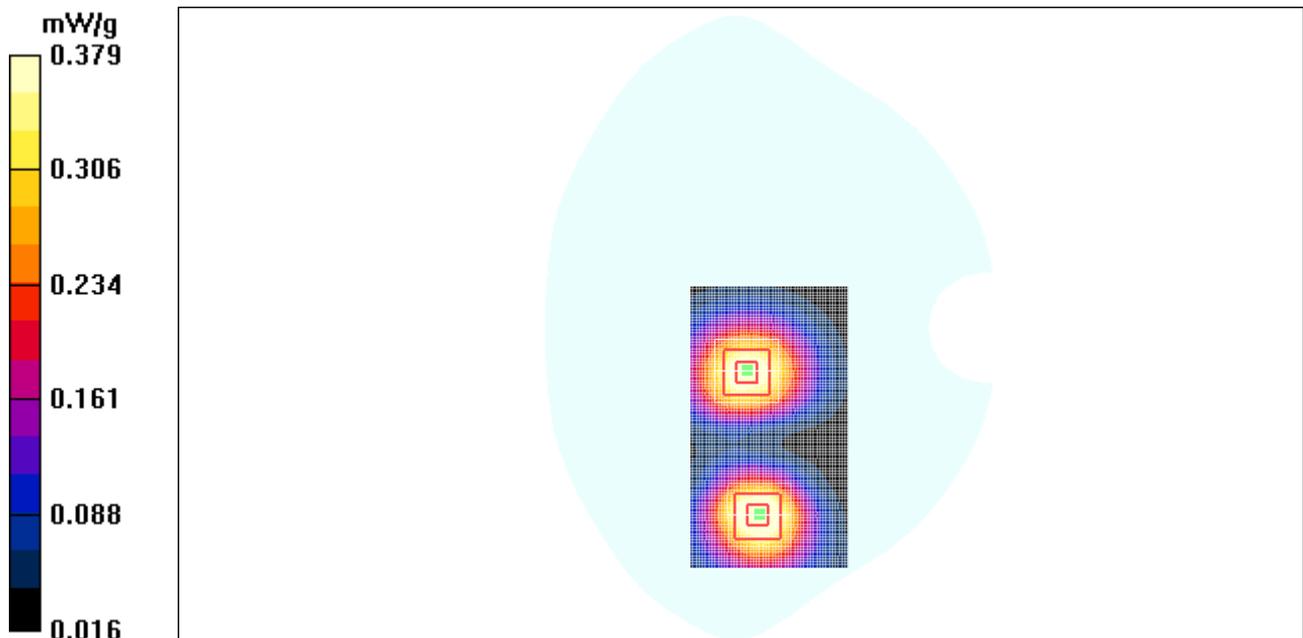


Figure 104 Body, Towards Phantom, GSM 1900 GPRS Channel 661

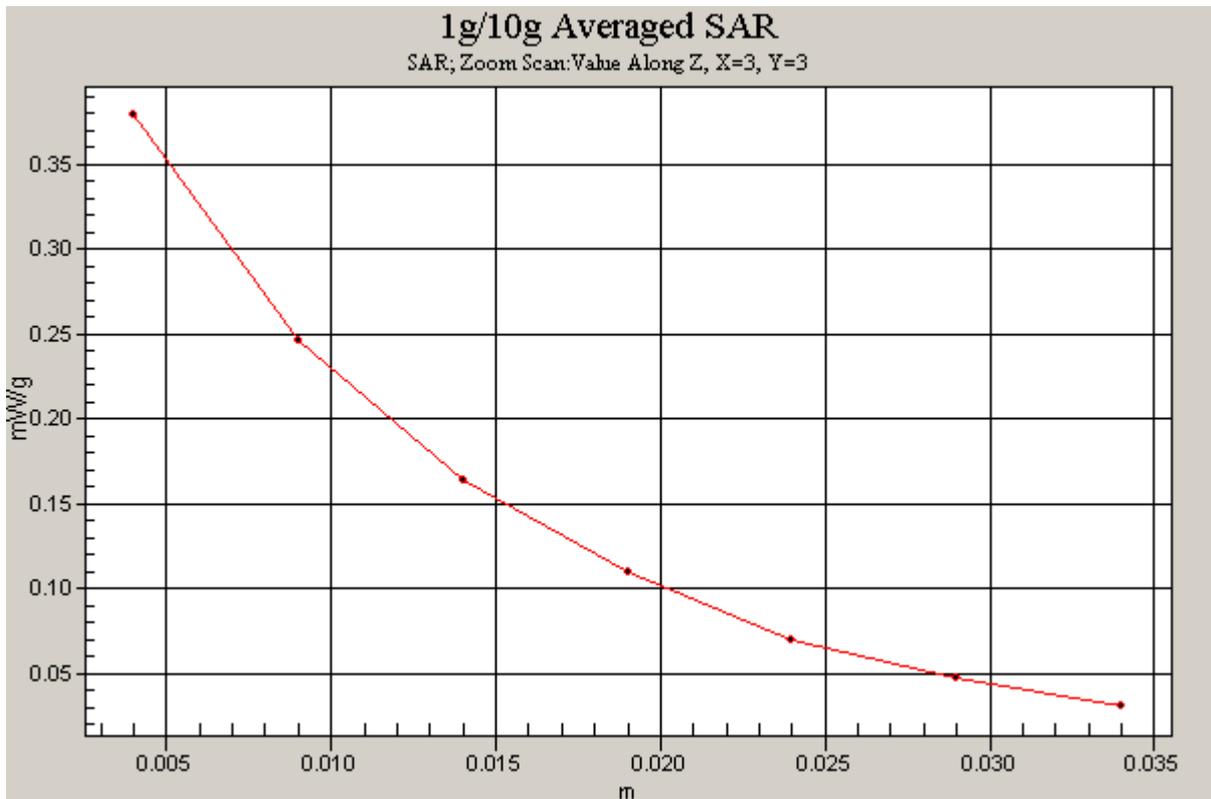
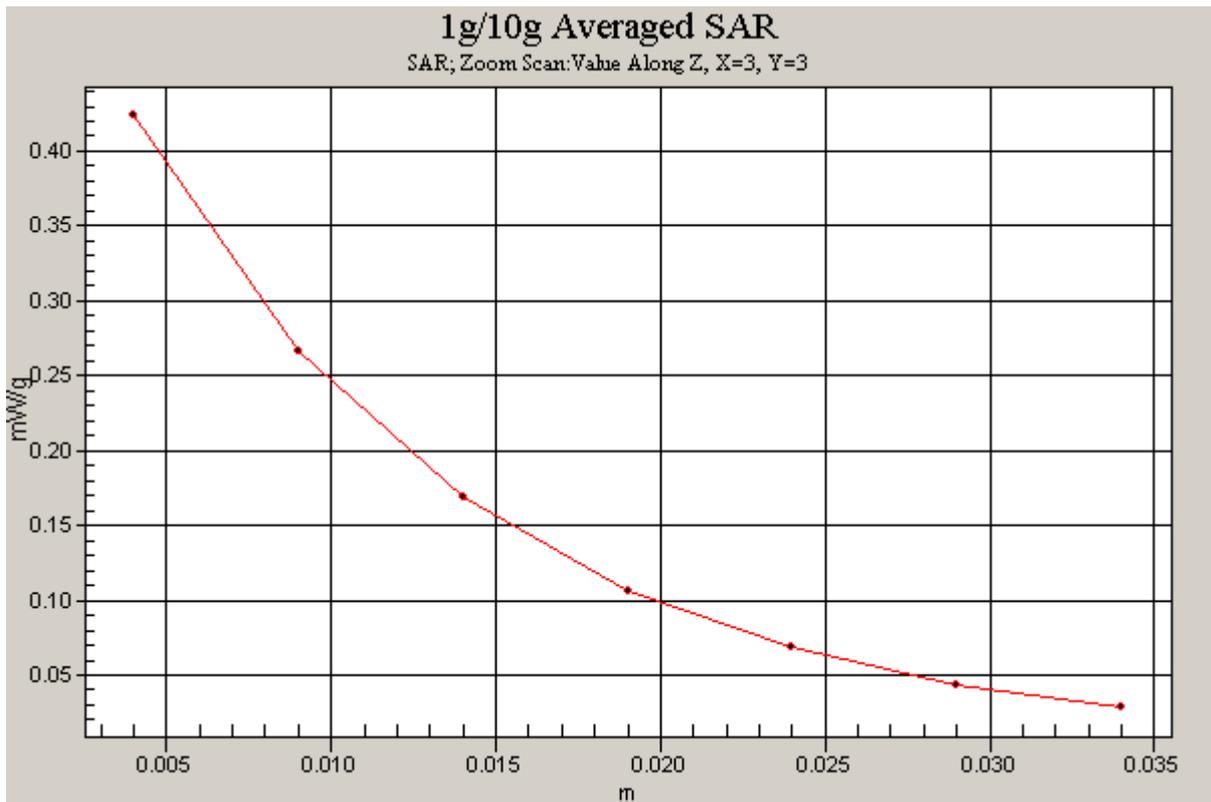


Figure 105 Z-Scan at power reference point (Body, Towards Phantom, GSM 1900 GPRS Channel 661)

### GSM 1900 GPRS Towards Phantom Low

Communication System: GSM 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);

Electronics: DAE3 Sn536;

**Towards Phantom Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.417 mW/g

**Towards Phantom Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 0.590 W/kg

**SAR(1 g) = 0.369 mW/g; SAR(10 g) = 0.222 mW/g**

Maximum value of SAR (measured) = 0.401 mW/g

**Towards Phantom Low/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 0.534 W/kg

**SAR(1 g) = 0.351 mW/g; SAR(10 g) = 0.223 mW/g**

Maximum value of SAR (measured) = 0.378 mW/g

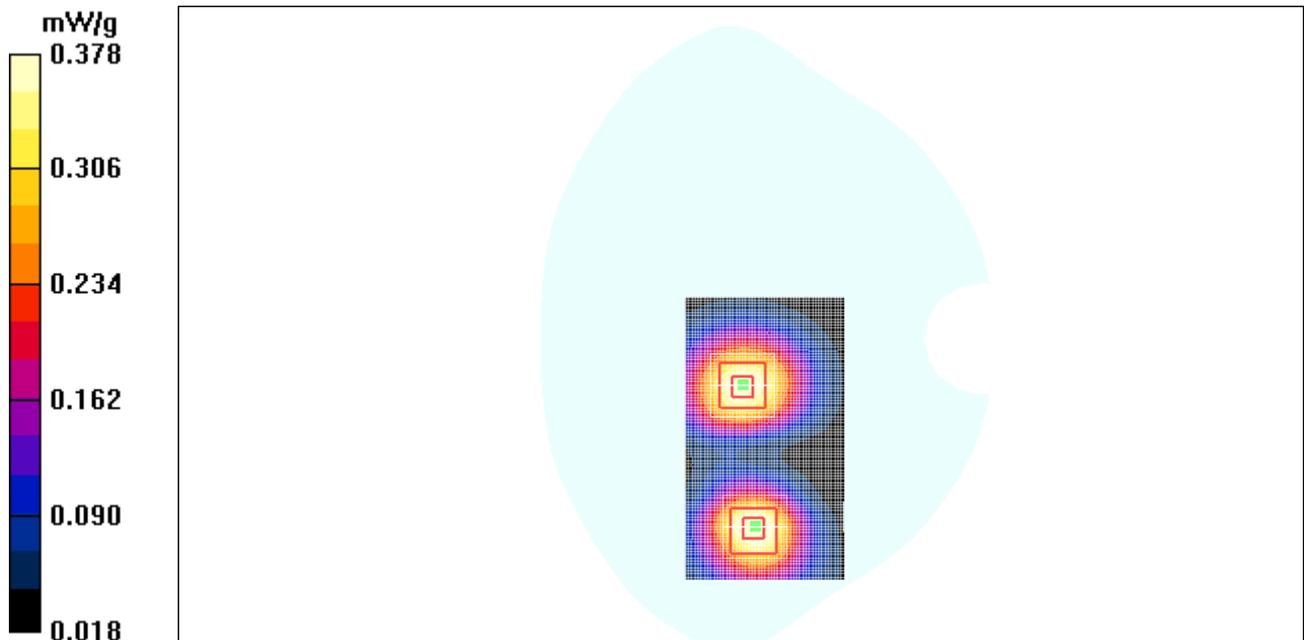


Figure 106 Body, Towards Phantom, GSM 1900 GPRS Channel 512

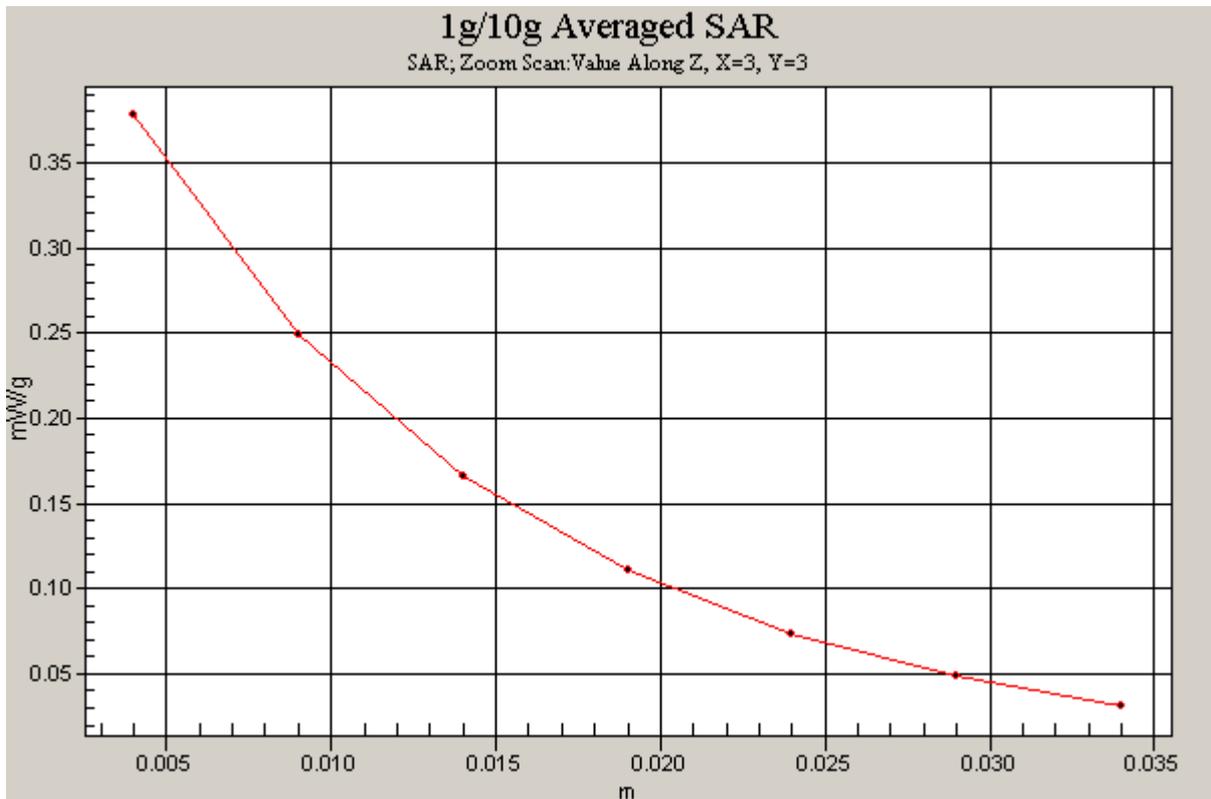
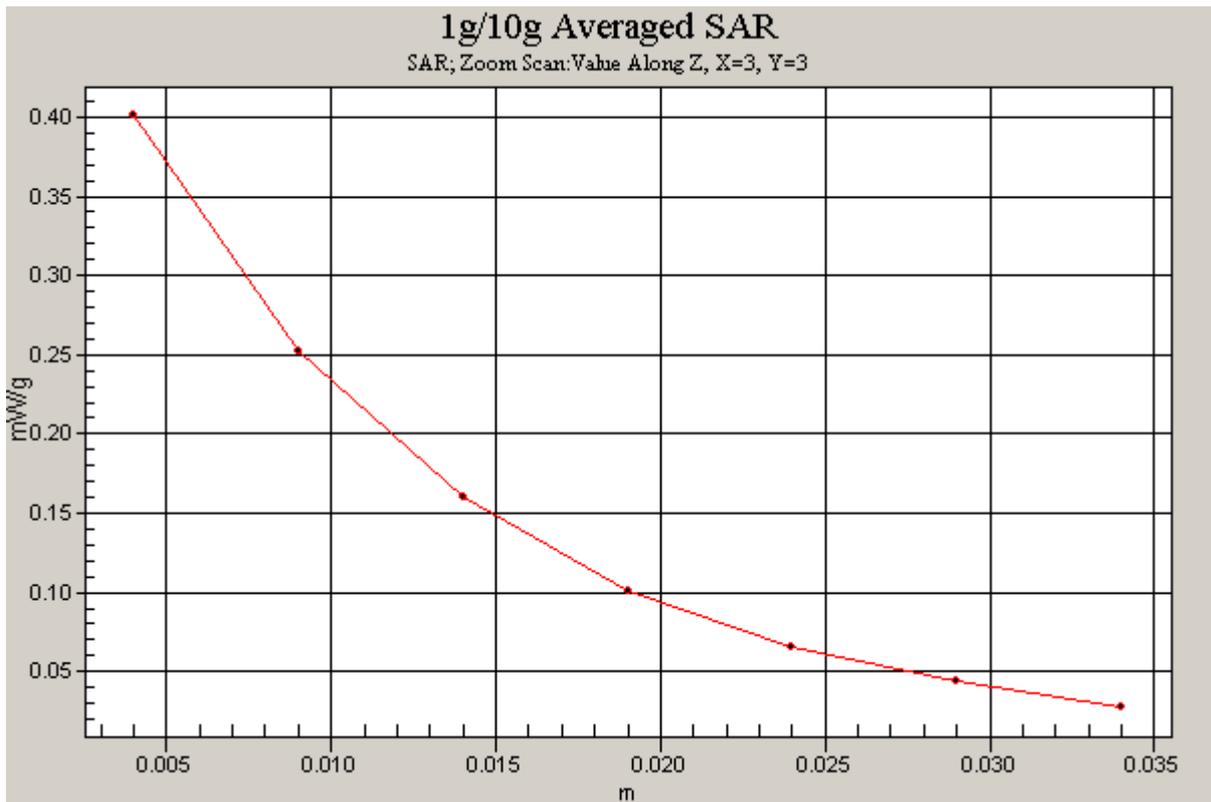


Figure 107 Z-Scan at power reference point (Body, Towards Phantom, GSM 1900 GPRS Channel 512)

## ANNEX D : SYSTEM VALIDATION RESULTS

### System Performance Check at 835 MHz

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d020**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.924 \text{ mho/m}$ ;  $\epsilon_r = 42.47$ ;  $\rho = 1000 \text{ kg/m}^3$

Probe: EX3DV4 - SN3660; ConvF(9.19, 9.19, 9.19);

Electronics: DAE3 Sn536;

**d=15mm, Pin=250mW/Area Scan (101x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.81 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.8 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 3.50 W/kg

**SAR(1 g) = 2.3 mW/g; SAR(10 g) = 1.5 mW/g**

Maximum value of SAR (measured) = 2.83 mW/g

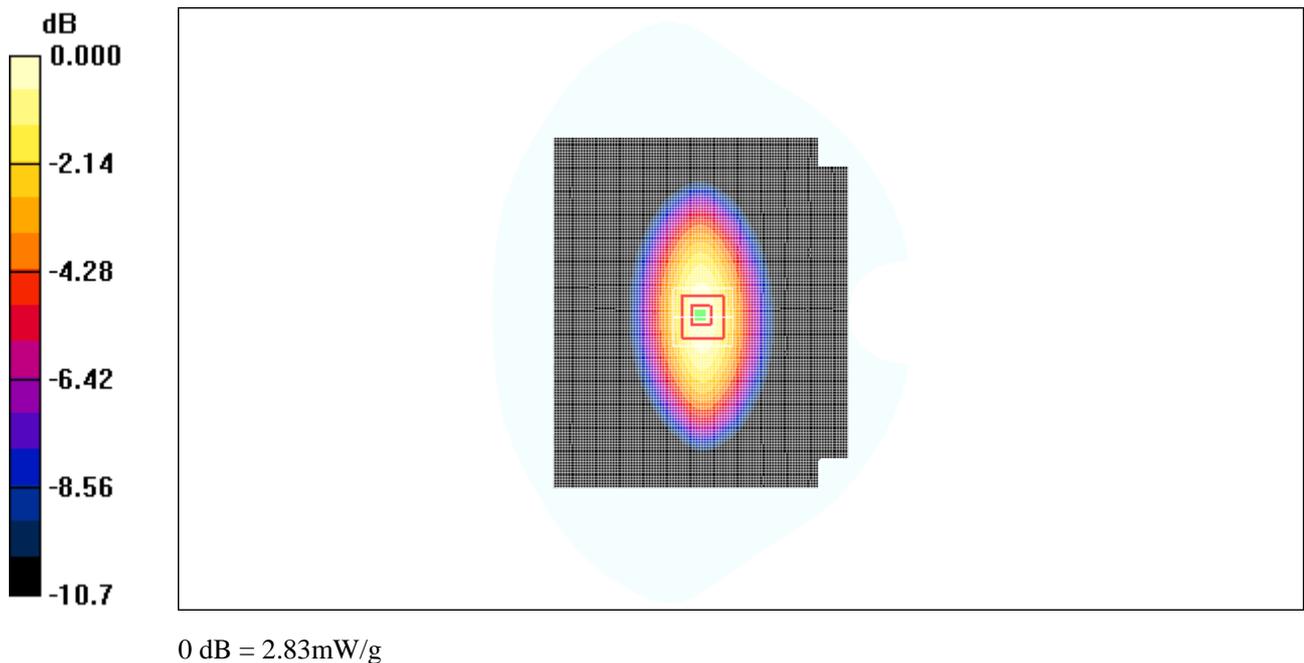


Figure 108 System Performance Check 835MHz 250mW

### System Performance Check at 1900 MHz

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d060**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.393$  mho/m;  $\epsilon_r = 40.12$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: EX3DV4 - SN3660; ConvF(7.35, 7.35, 7.35);

Electronics: DAE3 Sn536;

**d=10mm, Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.4 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.1 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 16.9 W/kg

**SAR(1 g) = 9.74 mW/g; SAR(10 g) = 5.09 mW/g**

Maximum value of SAR (measured) = 11.1 mW/g

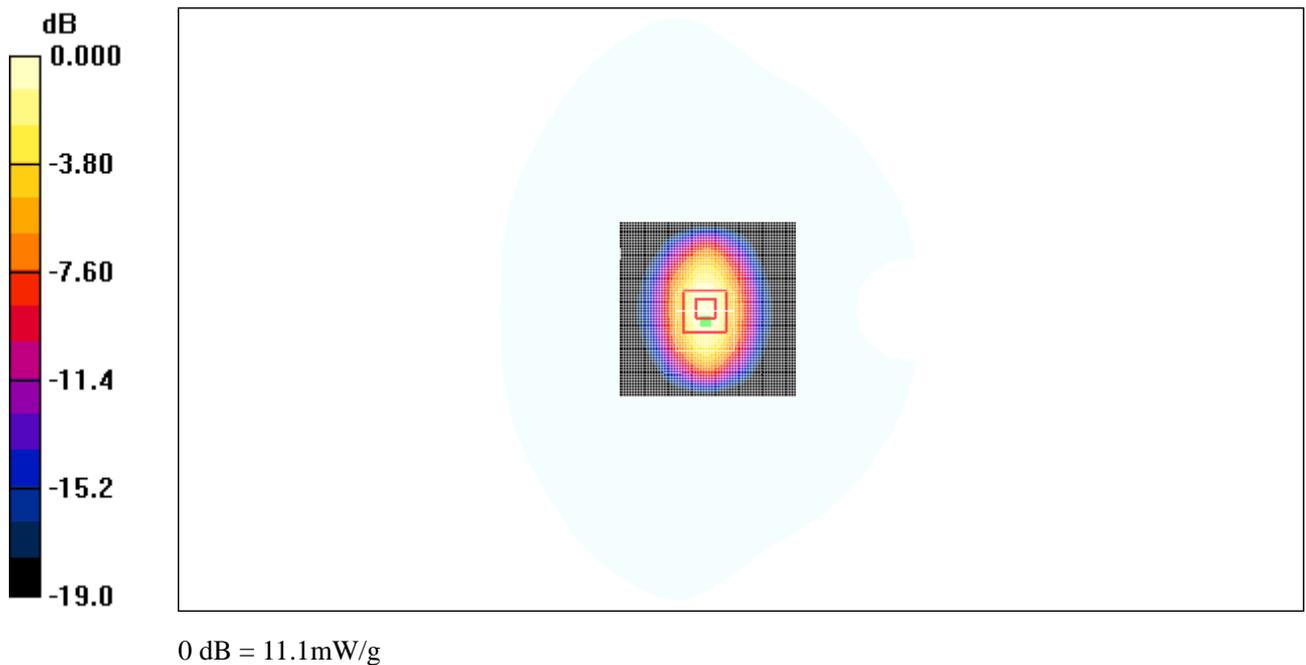


Figure 109 System Performance Check 1900MHz 250mW

# TA Technology (Shanghai) Co., Ltd. Test Report

No. RZA2008-1482FCC

Page 139 of 175

## ANNEX E : PROBE CALIBRATION CERTIFICATE

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA (Auden)**

Certificate No: **EX3-3660\_Sep08**

### CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3660**

Calibration procedure(s) **QA CAL-01.v6 and QA CAL-23.v3  
Calibration procedure for dosimetric E-field probes**

Calibration date: **September 3, 2008**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41495277	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41498087	1-Apr-08 (No. 217-00788)	Apr-09
Reference 3 dB Attenuator	SN: S5054 (3c)	1-Jul-08 (No. 217-00865)	Jul-09
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-08 (No. 217-00787)	Apr-09
Reference 30 dB Attenuator	SN: S5129 (30b)	1-Jul-08 (No. 217-00866)	Jul-09
Reference Probe ES3DV2	SN: 3013	2-Jan-08 (No. ES3-3013_Jan08)	Jan-09
DAE4	SN: 660	3-Sep-07 (No. DAE4-660_Sep07)	Sep-08
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-07)	In house check: Oct-08

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Fin Bornholt	R&D Director	

Issued: September 3, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
S Service suisse d'étalonnage  
C Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

**Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
Polarization $\phi$	$\phi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

**Methods Applied and Interpretation of Parameters:**

- NORM<sub>x,y,z</sub>:** Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

EX3DV4 SN:3660

September 3, 2008

# Probe EX3DV4

## SN:3660

Manufactured: April 29, 2008  
Calibrated: September 3, 2008

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)




EX3DV4 SN:3660

September 3, 2008

### Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)


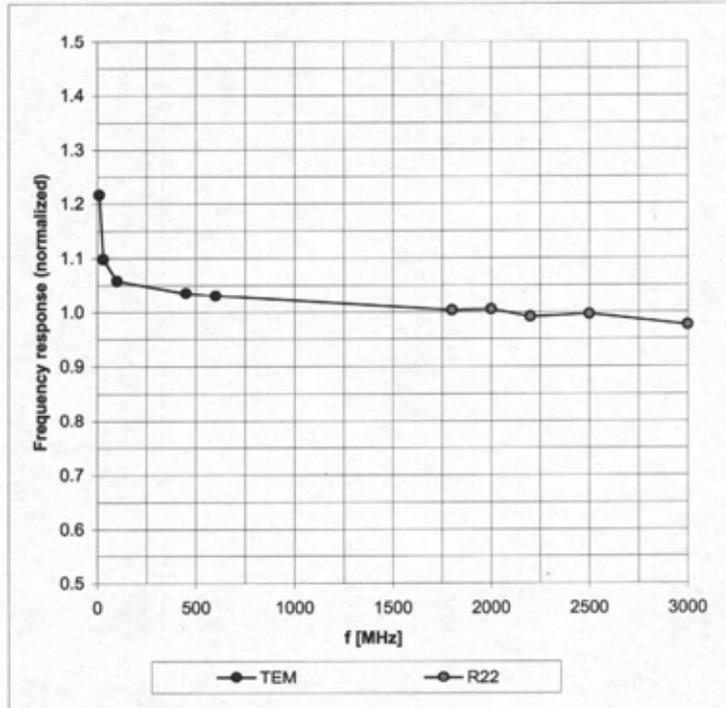


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

EX3DV4 SN:3660

September 3, 2008

Receiving Pattern ( $\phi$ ),  $\vartheta = 0^\circ$

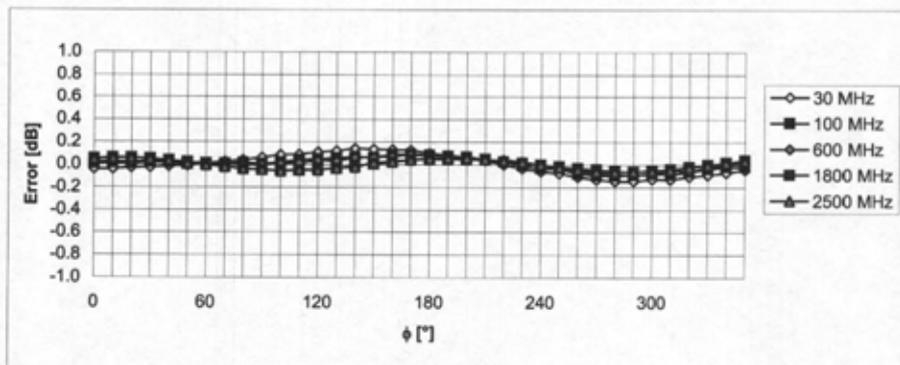
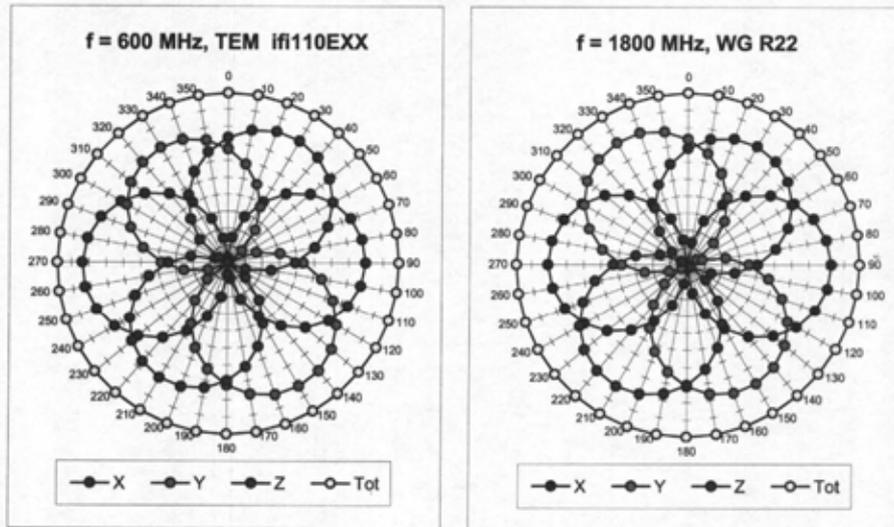


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

EX3DV4 SN:3660

September 3, 2008

**Dynamic Range f(SAR<sub>head</sub>)**  
(Waveguide R22, f = 1800 MHz)

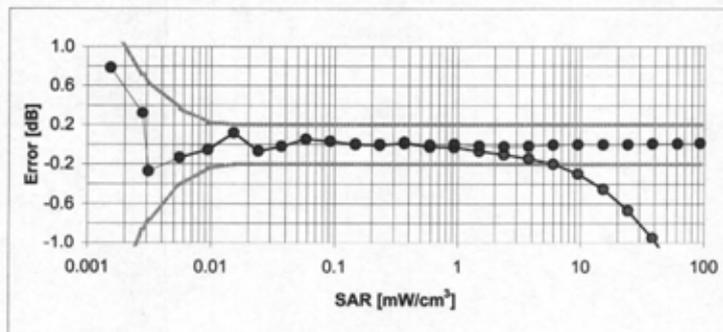
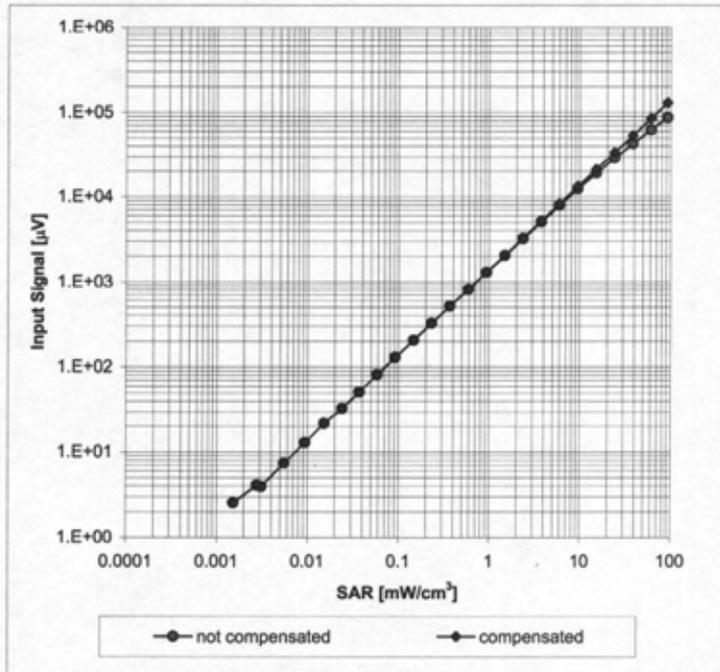


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)

EX3DV4 SN:3660

September 3, 2008

Conversion Factor Assessment

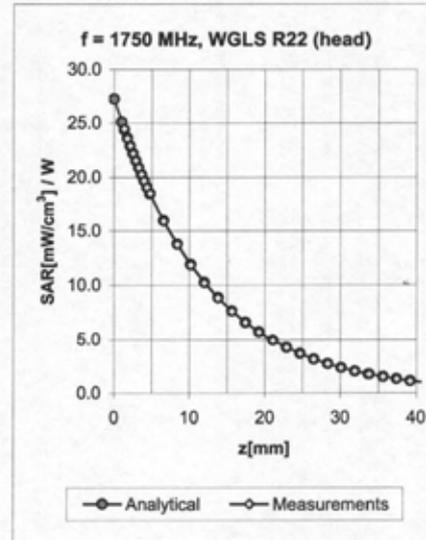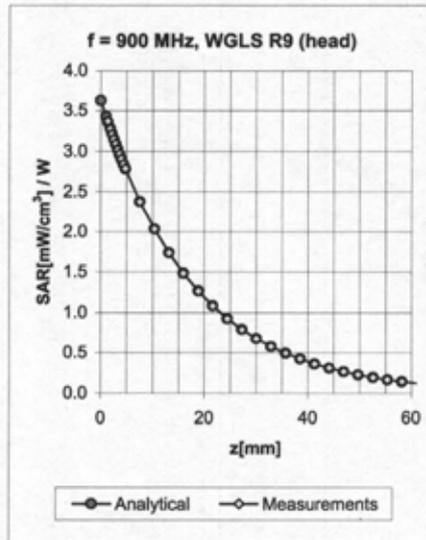


f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.49	0.76	9.19 ± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.43	0.83	8.84 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.68	0.63	7.79 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.31	0.80	7.35 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.32	0.85	6.94 ± 11.0% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.63	0.71	9.10 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.30	1.08	8.76 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.34	0.86	7.55 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.60	0.67	7.45 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.30	1.15	6.75 ± 11.0% (k=2)

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

EX3DV4 SN:3660

September 3, 2008

**Deviation from Isotropy in HSL**  
Error ( $\phi, \theta$ ),  $f = 900$  MHz

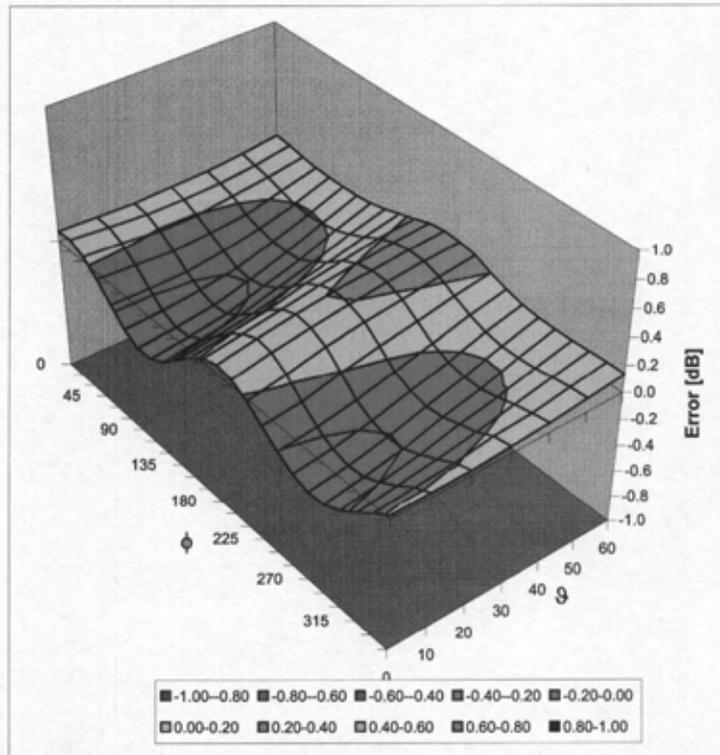

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2008-1482FCC

Page 148 of 175

**ANNEX F : D835V2 DIPOLE CALIBRATION CERTIFICATE**

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Auden**

Certificate No: **D835V2-4d020\_Jul08**

**CALIBRATION CERTIFICATE**

Object **D835V2 - SN: 4d020**

Calibration procedure(s) **QA CAL-05.v7  
Calibration procedure for dipole validation kits**

Calibration date: **July 21, 2008**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	04-Oct-07 (No. 217-00736)	Oct-08
Power sensor HP 8481A	US37292783	04-Oct-07 (No. 217-00736)	Oct-08
Reference 20 dB Attenuator	SN: 5086 (20g)	01-Jul-08 (No. 217-00864)	Jul-09
Type-N mismatch combination	SN: 5047.2 / 06327	01-Jul-08 (No. 217-00867)	Jul-09
Reference Probe ES3DV2	SN: 3025	28-Apr-08 (No. ES3-3025_Apr08)	Apr-09
DAE4	SN: 601	14-Mar-08 (No. DAE4-601_Mar08)	Mar-09
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-07)	In house check: Oct-08

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: July 21, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.