




Appendix F

Conducted Emission at Power Port

According to FCC Part 15.107

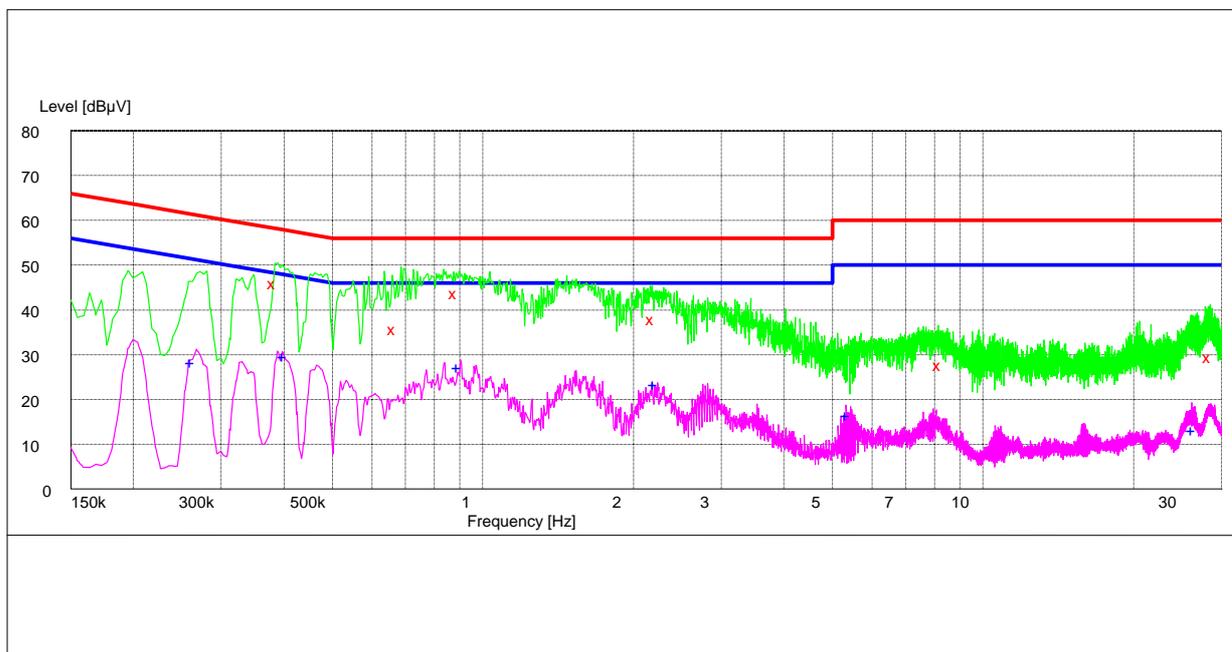

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.384000	46.20	10.0	58	11.8	N	FLO
0.667500	36.10	10.0	56	19.9	N	FLO
0.883500	44.10	10.0	56	11.9	N	FLO
2.193000	38.20	10.1	56	17.8	N	FLO
8.214000	27.90	10.1	60	32.1	N	FLO
28.531500	29.80	10.5	60	30.2	L3	FLO

MEASUREMENT RESULT: AV Detector


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.262500	28.60	10.0	51	22.4	N	FLO
0.402000	30.00	10.0	48	18.0	N	FLO
0.897000	27.50	10.0	46	18.5	N	FLO
2.215500	23.80	10.1	46	22.2	N	FLO
5.379000	16.90	10.1	50	33.1	N	FLO
26.376000	13.50	10.4	50	36.5	L3	FLO



Appendix G

Radiated Emission of Enclosure in Idle Mode

According to FCC Part 15.109

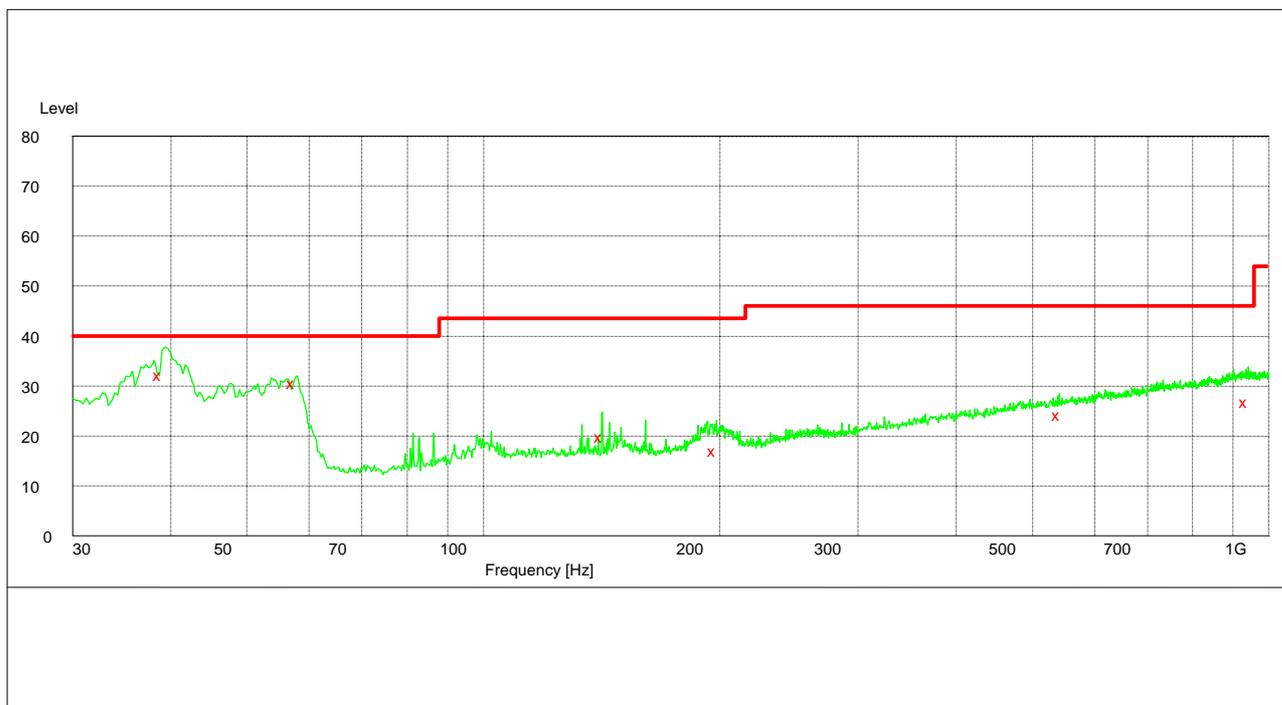

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
38.820000	32.30	-11.3	40.0	7.7	100.0	292.00	HORIZONTAL
57.480000	30.70	-18.3	40.0	9.3	106.0	85.00	HORIZONTAL
141.360000	20.00	-15.3	43.5	23.5	136.0	82.00	VERTICAL
197.400000	17.00	-13.9	43.5	26.5	174.0	207.00	HORIZONTAL
541.860000	24.30	-5.0	46.0	21.7	169.0	44.00	VERTICAL
938.460000	26.80	0.6	46.0	19.2	299.0	282.00	HORIZONTAL