

# FCC RF Test Report

APPLICANT : Huawei Technologies Co., Ltd.  
EQUIPMENT : Ereader  
BRAND NAME : Huawei  
MODEL NAME : T62W  
FCC ID : QIST62W  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : Digital Spread Spectrum (DSS)

The product was received on Jun. 07, 2010 and completely tested on Jul. 27, 2010. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Anderson Chiu / Vice Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer..... 5

    1.3 Feature of Equipment Under Test ..... 5

    1.4 Testing Site ..... 6

    1.5 Applied Standards ..... 6

    1.6 Ancillary Equipment List ..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**

    2.1 RF Output Power ..... 7

    2.2 Test Mode..... 8

    2.3 Connection Diagram of Test System..... 9

    2.4 RF Utility ..... 10

**3 TEST RESULT ..... 11**

    3.1 Number of Channel Measurement ..... 11

    3.2 20dB Bandwidth Measurement ..... 13

    3.3 Hopping Channel Separation Measurement ..... 20

    3.4 Dwell Time Measurement..... 23

    3.5 Peak Output Power Measurement ..... 25

    3.6 Band Edges Measurement ..... 28

    3.7 Spurious Emission Measurement..... 32

    3.8 AC Conducted Emission Measurement..... 36

    3.9 Radiated Emission Measurement..... 40

    3.10 Antenna Requirements ..... 49

**4 LIST OF MEASURING EQUIPMENT..... 50**

**5 UNCERTAINTY OF EVALUATION..... 51**

**APPENDIX A. SETUP PHOTOGRAPHS**



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	≤ 1W	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	< 20 dBc	Pass	-
3.8	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 11.96 dB at 0.60 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.96 dB at 2483.5 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

Huawei Technologies Co., Ltd.

Bantian, Longgang District, Shenzhen 518129, P.R.China

## 1.2 Manufacturer

Huawei Technologies Co., Ltd.

Bantian, Longgang District, Shenzhen 518129, P.R.China

## 1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Ereader
Brand Name	Huawei
Model Name	T62W
FCC ID	QIST62W
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 3.52 dBm (0.002 W) Bluetooth EDR (2Mbps) : 3.26 dBm (0.002 W) Bluetooth EDR (3Mbps) : 3.50 dBm (0.002 W)
Antenna Type	Chip Antenna with gain 1 dBi
HW Version	SH421A-MB-P3.0
SW Version	20100531smdk6410_images
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi$ /4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Production Unit

**Remark:**

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.	
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	CO01-KS	03CH01-KS

## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC Public Notice DA 00-705
- ANSI C63.4-2003
- IC RSS-210 Issue 7

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	Anritsu	8852B	N/A	N/A	Unshielded, 1.8 m
3.	Notebook	Dell	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 1.84m DC O/P: Shielded, 0.9m
4.	Bluetooth Earphone	Nokia	HS-12W	PYAHS-12W	N/A	N/A

## 2 Test Configuration of Equipment Under Test

### 2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi$ /4-DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	3.52 dBm	3.26 dBm	3.50 dBm
Ch39	2441MHz	0.97 dBm	0.46 dBm	0.81 dBm
Ch78	2480MHz	-0.50 dBm	-0.96 dBm	-0.60 dBm

**Remark:**

1. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

## 2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases and recorded in this report.


<b>Test Cases</b>			
<b>Test Item</b>	<b>Data Rate / Modulation</b>		
	<b>Bluetooth 1Mbps GFSK</b>	<b>Bluetooth EDR 2Mbps <math>\pi</math>/4-DQPSK</b>	<b>Bluetooth EDR 3Mbps 8-DPSK</b>
<b>Conducted TCs</b>	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
<b>Radiated TCs</b>	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	N/A	N/A
<b>AC Conducted Emission</b>	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + Adapter		
<b>Remark:</b> For radiated TCs, the data rate was set in 1Mbps due to the highest RF output power; only the data of these modes was reported.			

## 2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

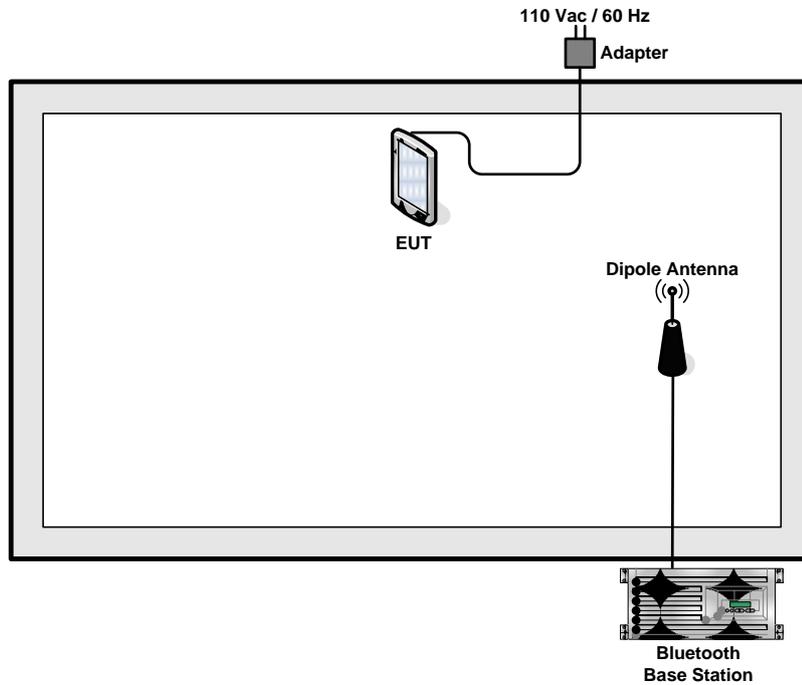

<EUT with Adapter and Earphone Mode>

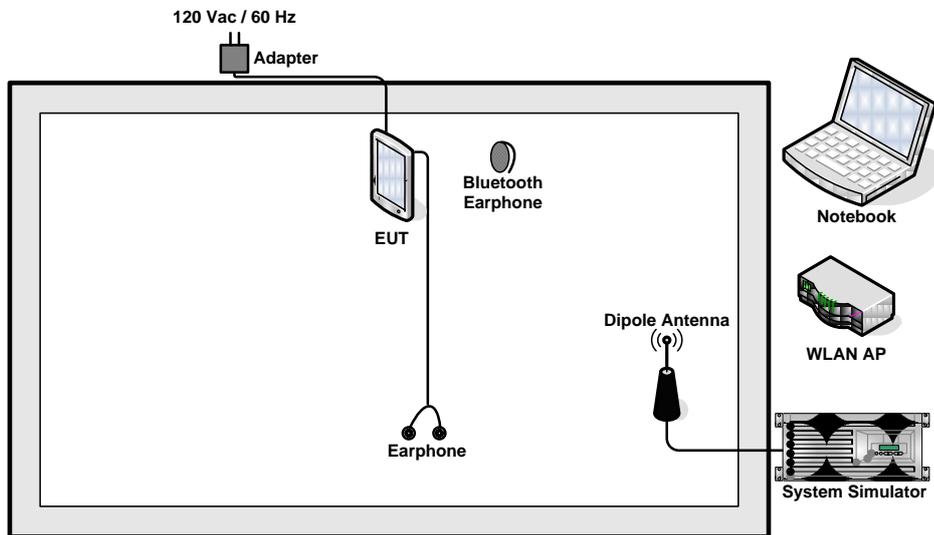



## **2.4 RF Utility**

For Bluetooth function, the RF utility, "BT Test" was installed in EUT which was programmed in order to make the EUT into the engineering modes to contact with Bluetooth base station for transmitting and receiving signals continuously.

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = the frequency band of operation;  $RBW \geq 1\%$  of the span;  $VBW \geq RBW$ ; Sweep = auto;  
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.


##### 3.1.4 Test Setup

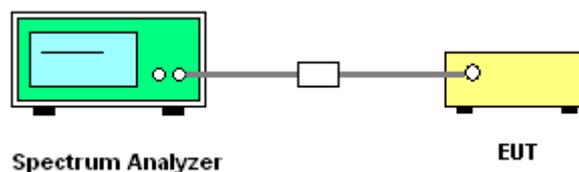

### 3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	Mode 1~3	Temperature :	20~21°C
Test Engineer :	Sky Liu	Relative Humidity :	40~41%
Number of Hopping Channels (Channel)		Limits (Channel)	
79		> 15	
		Pass/Fail	
		Pass	

Number of Hopping Channel Plot on Channel 00 - 78

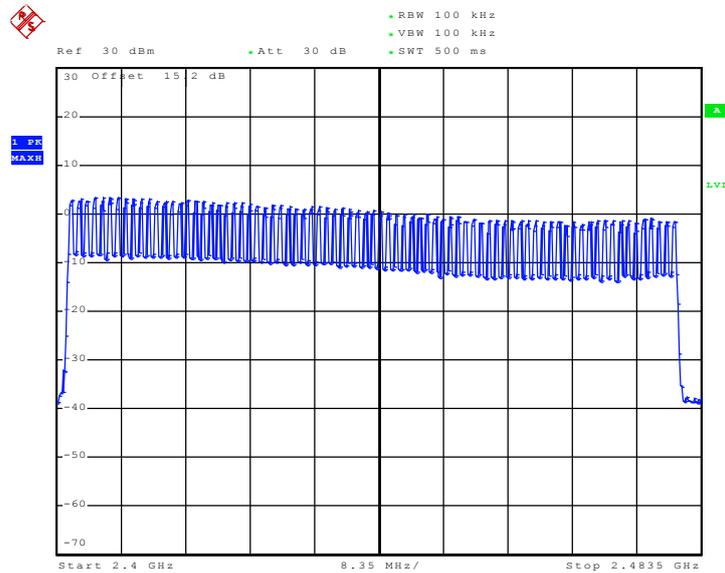

Date: 12.JUN.2010 15:22:23

## 3.2 20dB Bandwidth Measurement

### 3.2.1 Limit of 20dB Bandwidth

N/A


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

### 3.2.4 Test Setup

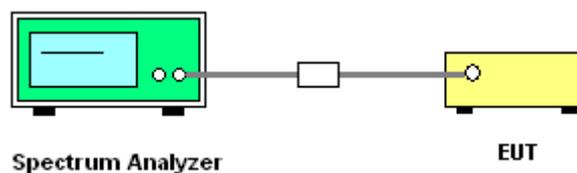




3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	20~21°C
Test Engineer :	Sky Liu	Relative Humidity :	40~41%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.876
39	2441	0.873
78	2480	0.873


20 dB Bandwidth Plot on Channel 00

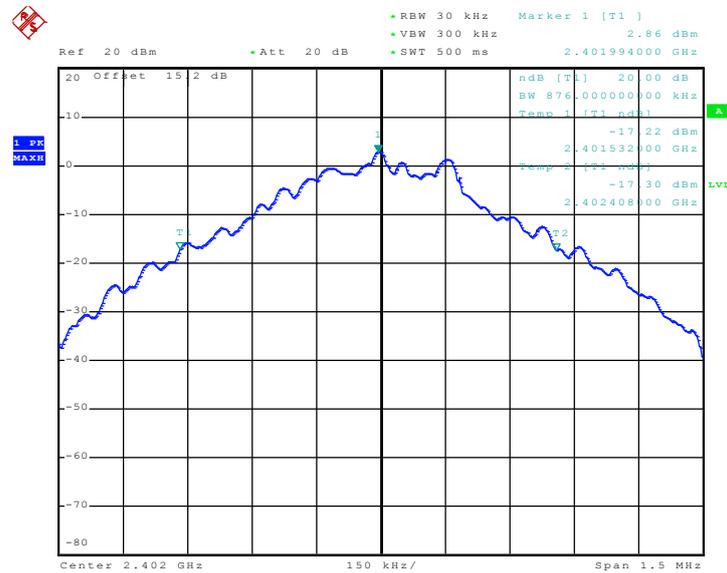

Date: 12.JUN.2010 14:59:55




20 dB Bandwidth Plot on Channel 39

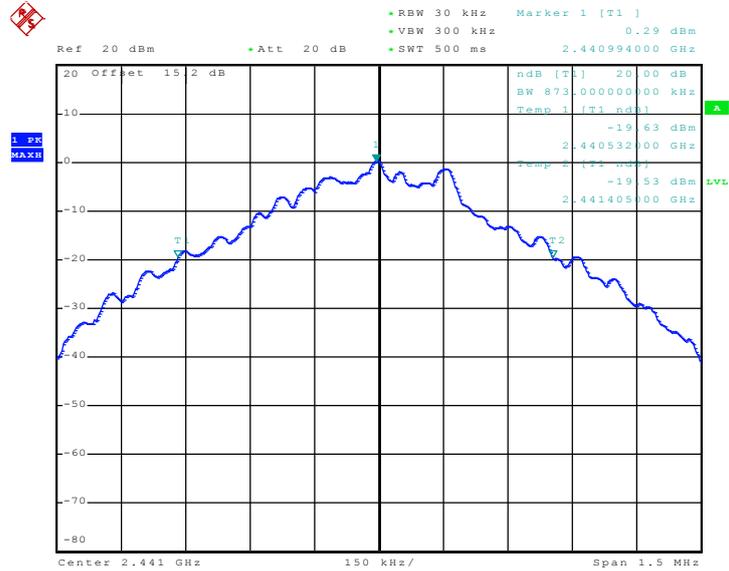

Date: 12.JUN.2010 15:00:34

20 dB Bandwidth Plot on Channel 78

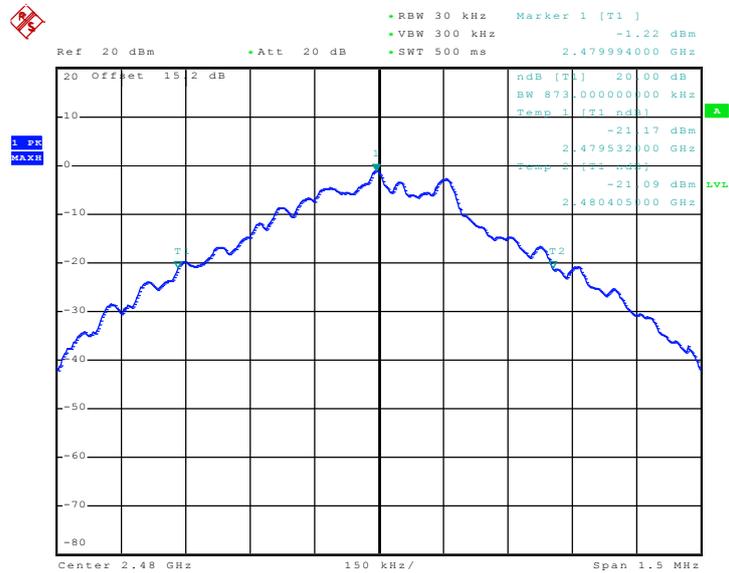


Date: 12.JUN.2010 15:01:12



Test Mode :	Mode 4, 5, 6	Temperature :	20~21°C
Test Engineer :	Sky Liu	Relative Humidity :	40~41%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.252
39	2441	1.248
78	2480	1.248


20 dB Bandwidth Plot on Channel 00

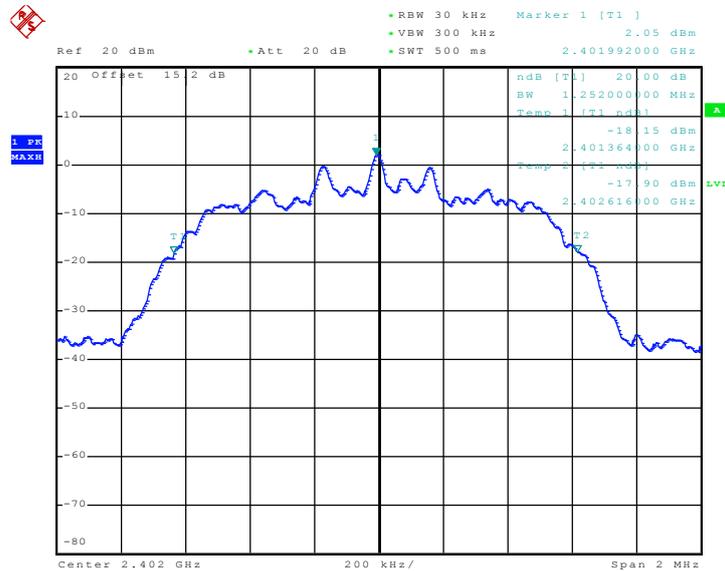

Date: 12.JUN.2010 14:57:42




20 dB Bandwidth Plot on Channel 39

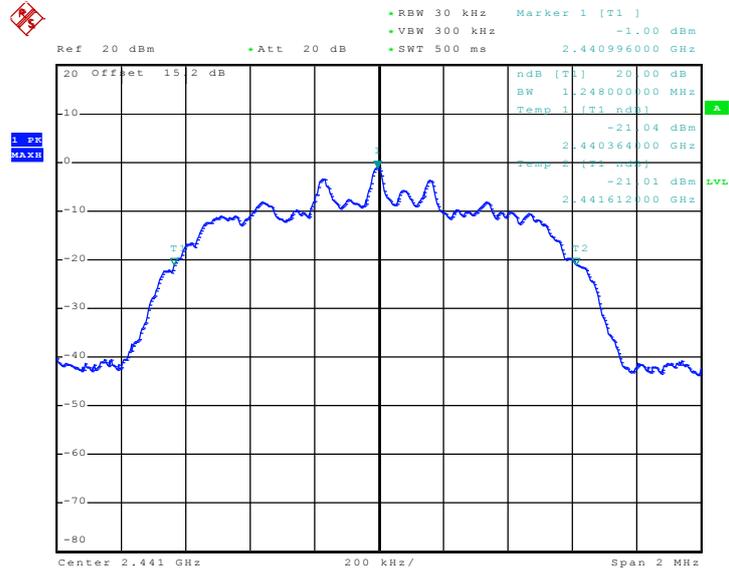

Date: 12.JUN.2010 14:58:18

20 dB Bandwidth Plot on Channel 78

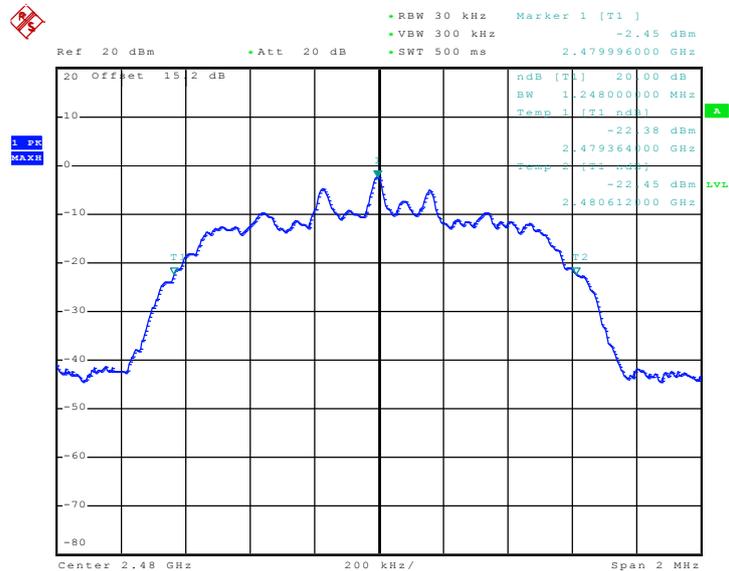


Date: 12.JUN.2010 14:58:53



Test Mode :	Mode 7, 8, 9	Temperature :	20~21°C
Test Engineer :	Sky Liu	Relative Humidity :	40~41%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.272
39	2441	1.272
78	2480	1.276


20 dB Bandwidth Plot on Channel 00

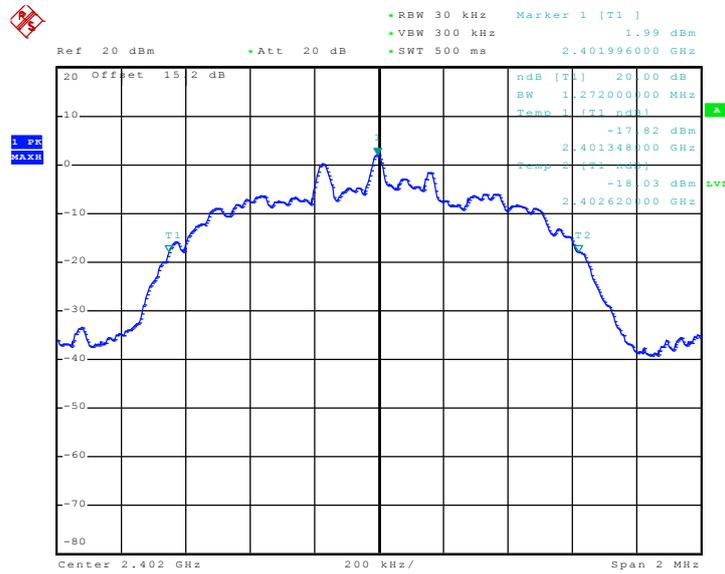

Date: 12.JUN.2010 14:50:09




### 20 dB Bandwidth Plot on Channel 39

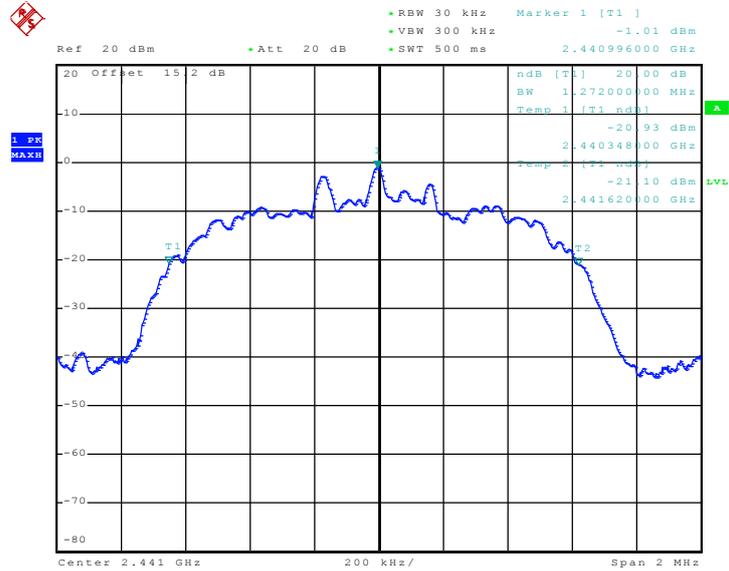

Date: 12.JUN.2010 14:54:27

### 20 dB Bandwidth Plot on Channel 78

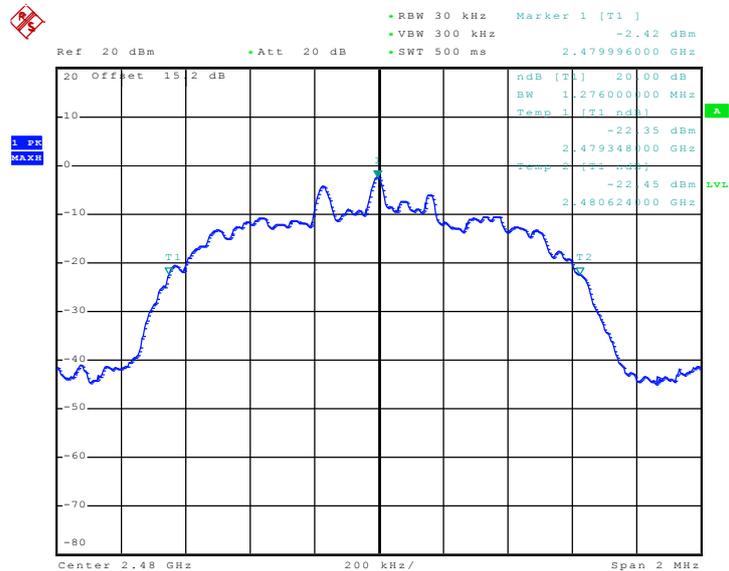

Date: 12.JUN.2010 14:55:23

### 3.3 Hopping Channel Separation Measurement

#### 3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  $RBW \geq 1\%$  of the span;  
VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### 3.3.4 Test Setup

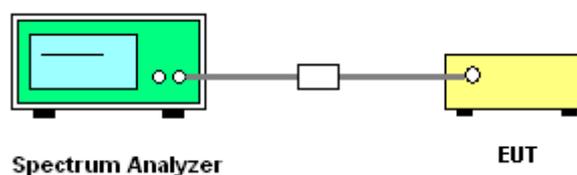


### 3.3.5 Test Result of Hopping Channel Separation

Test Mode :	Mode 1, 2, 3	Temperature :	20~21°C
Test Engineer :	Sky Liu	Relative Humidity :	40~41%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.004	0.584	Pass
39	2441	1.004	0.582	Pass
78	2480	1.000	0.582	Pass


Channel Separation Plot on Channel 00 - 01

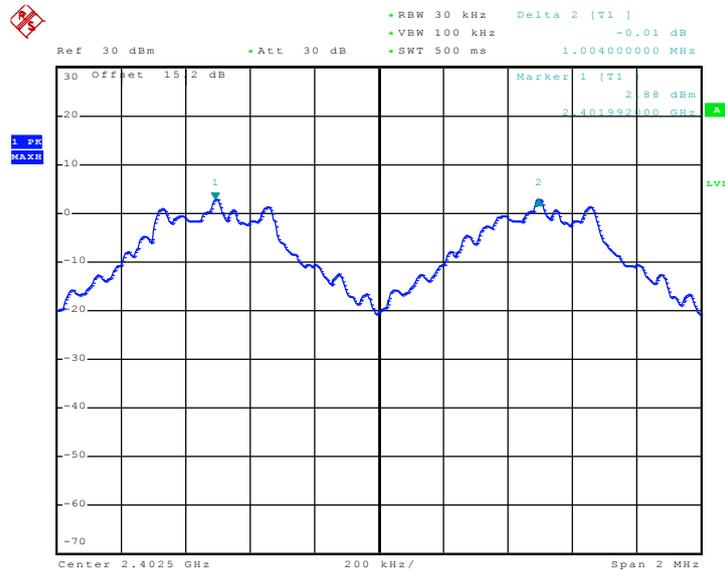

Date: 12.JUN.2010 15:31:29




Channel Separation Plot on Channel 39 - 40

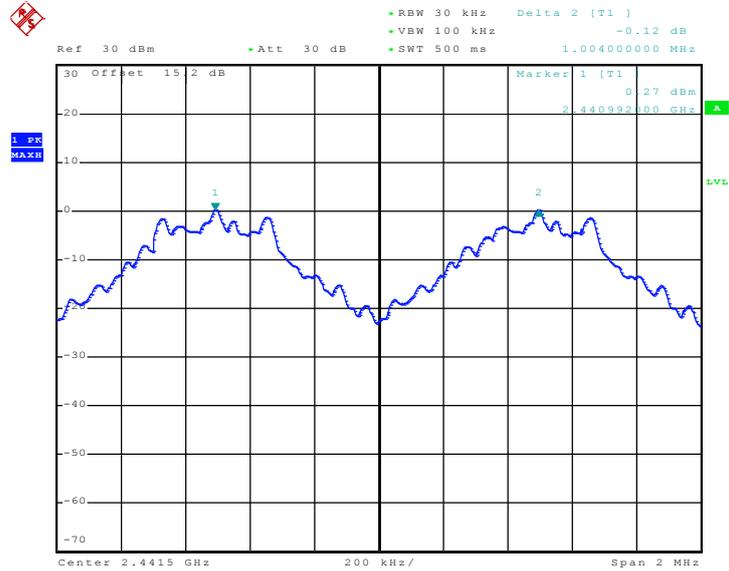

Date: 12.JUN.2010 15:33:31

Channel Separation Plot on Channel 77 - 78

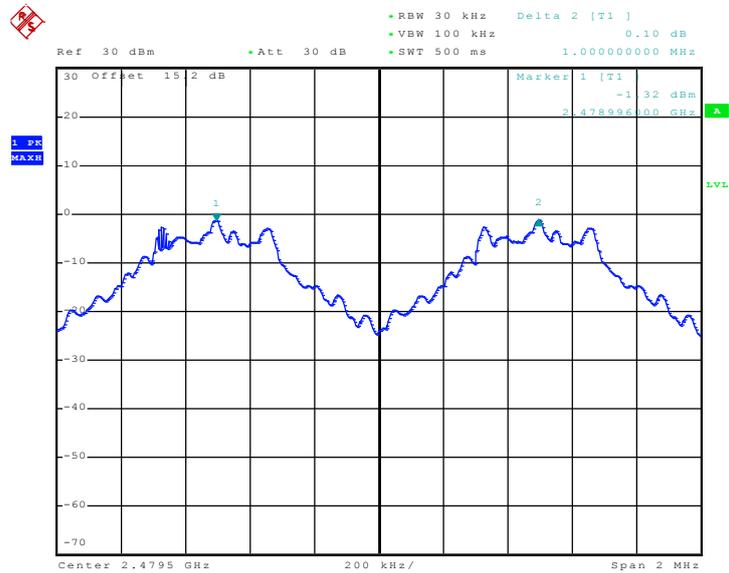

Date: 12.JUN.2010 15:36:05

### 3.4 Dwell Time Measurement

#### 3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

#### 3.4.4 Test Setup

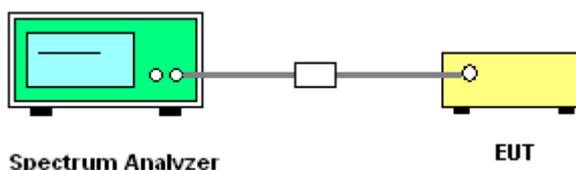

#### 3.4.5 Test Result of Dwell Time


<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	20~21°C		
<b>Test Engineer :</b>	Sky Liu	<b>Relative Humidity :</b>	40~41%		
Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
DH5	2.5	2980	0.24	0.4	Pass

**Remark:**

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




### DH5 Dwell Time (One Pulse) Plot on Channel 39

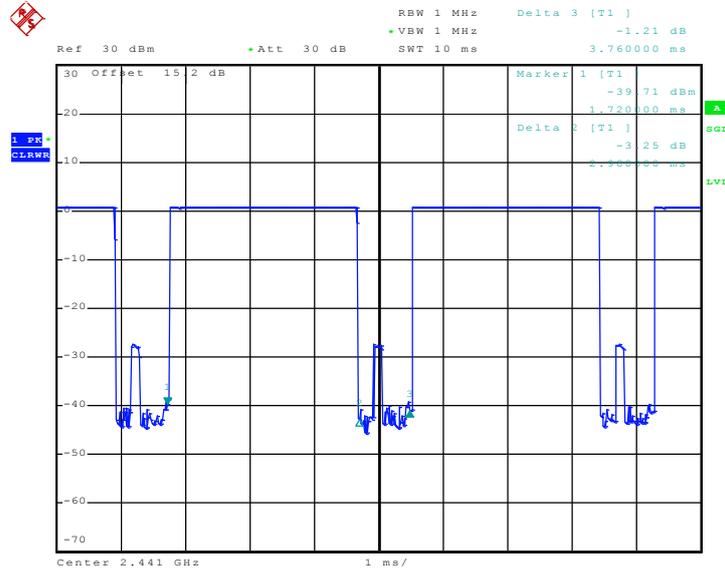

Date: 12.JUN.2010 15:39:39

### DH5 Dwell Time (Count Pulses) Plot on Channel 39

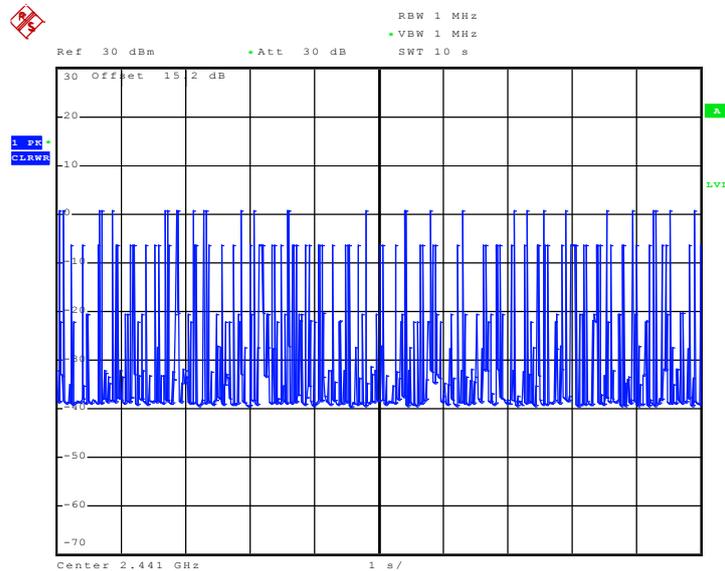

Date: 12.JUN.2010 15:41:50

### 3.5 Peak Output Power Measurement

#### 3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1W (30 dBm).


#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

#### 3.5.4 Test Setup

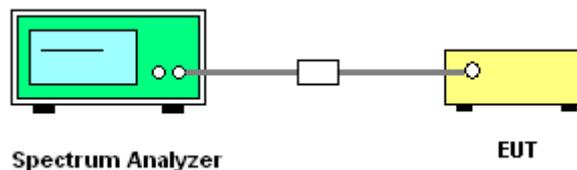


#### 3.5.5 Test Result of Peak Output Power

Test Mode :	Mode 1, 2, 3	Temperature :	20~21°C
Test Engineer :	Sky Liu	Relative Humidity :	40~41%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	3.52	30	Pass
39	2441	0.97	30	Pass
78	2480	-0.50	30	Pass




Peak Output Power Plot on Channel 00

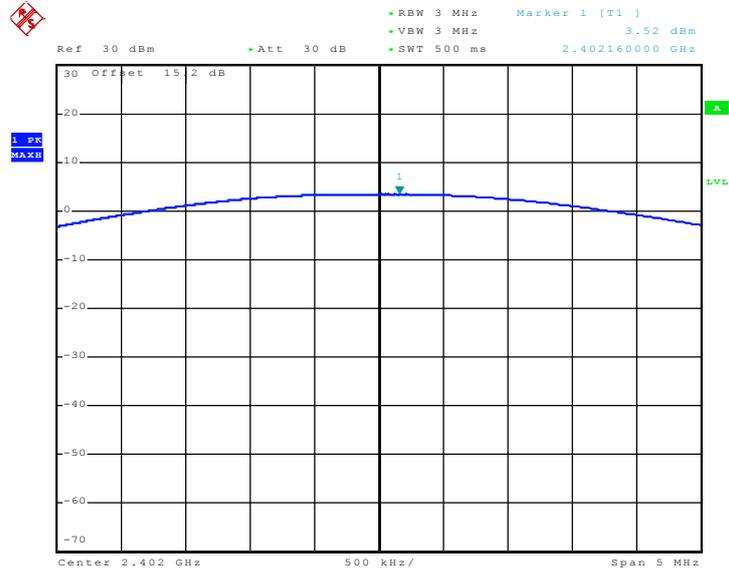

Date: 12.JUN.2010 14:42:03


Peak Output Power Plot on Channel 39

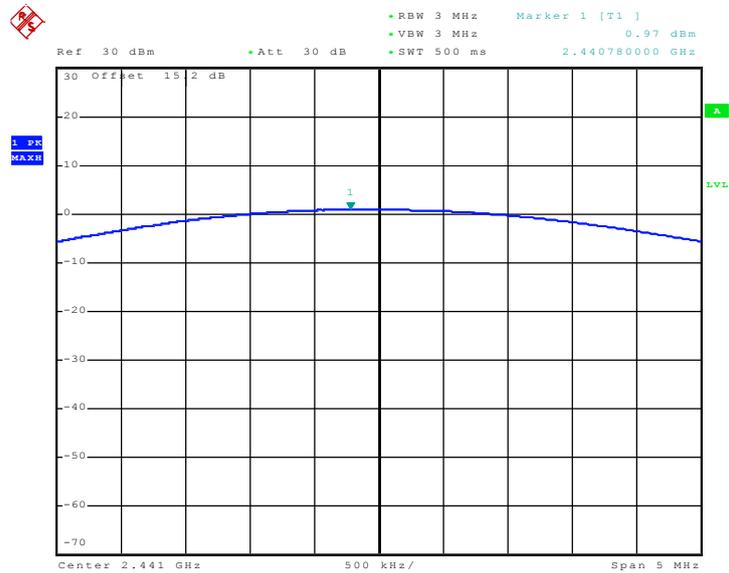

Date: 12.JUN.2010 14:12:52



Peak Output Power Plot on Channel 78

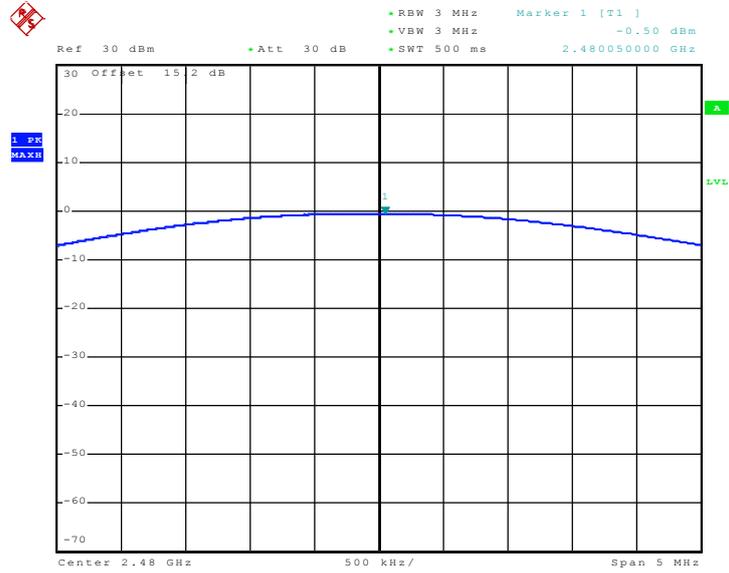

Date: 12.JUN.2010 14:15:02

## 3.6 Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 3.6.2 Measuring Instruments


See list of measuring instruments of this test report.

### 3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300kHz, Video bandwidth (VBW)  $\geq$  RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

### 3.6.4 Test Setup

#### <Radiated Band Edges>

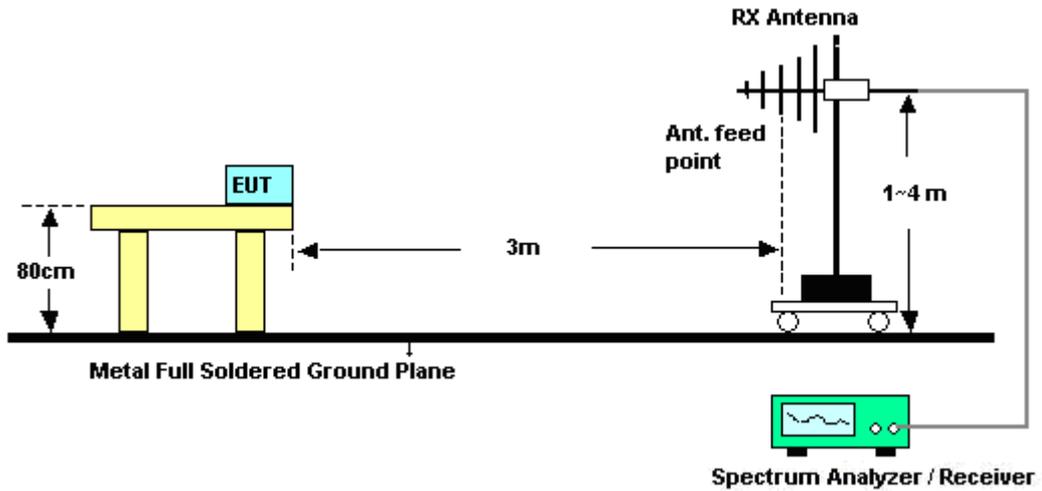

#### <Conducted Band Edges>

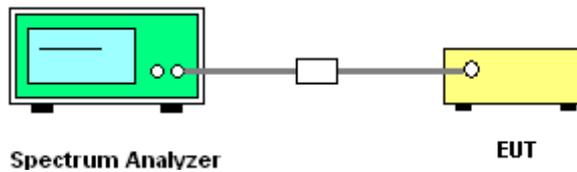



3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	41~42%
		Test Engineer :	Haitao Yin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2350.09	45.97	-28.03	74	44.9	32.78	3.12	34.83	-	-	Peak
2350.09	33.61	-20.39	54	32.54	32.78	3.12	34.83	100	69	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2350.47	45.75	-28.25	74	44.68	32.78	3.12	34.83	-	-	Peak
2350.47	33.36	-20.64	54	32.29	32.78	3.12	34.83	100	46	Average

Test Mode :	Mode 3	Temperature :	21~22°C
Test Channel :	78	Relative Humidity :	41~42%
		Test Engineer :	Haitao Yin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	56.72	-17.28	74	86.92	1.45	3.2	34.85	100	343	Peak
2483.5	46.79	-7.21	54	45.43	33.01	3.2	34.85	100	343	Average


ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	60.64	-13.36	74	90.84	1.45	3.2	34.85	100	40	Peak
2483.5	50.04	-3.96	54	48.68	33.01	3.2	34.85	100	40	Average



### 3.6.6 Test Result of Conducted Band Edges


Test Mode :	Mode 1 and 3	Temperature :	20~21°C
Test Channel :	00 and 78	Relative Humidity :	40~41%
		Test Engineer :	Sky Liu

Low Band Edge Plot on Channel 00

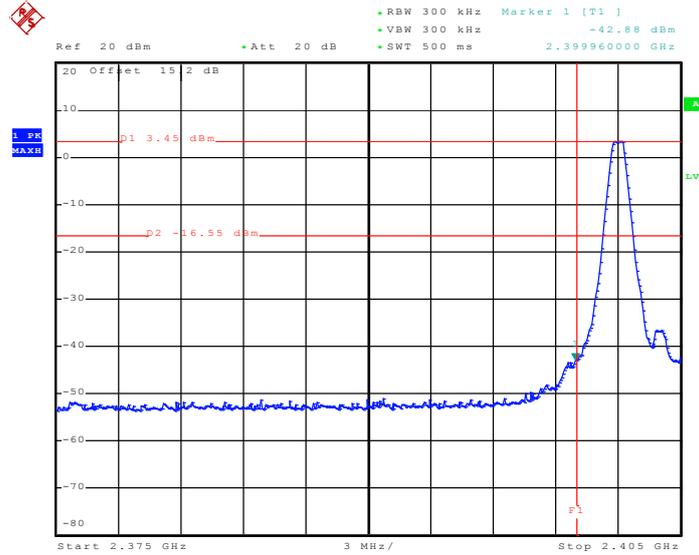

Date: 12.JUN.2010 15:49:01

High Band Edge Plot on Channel 78

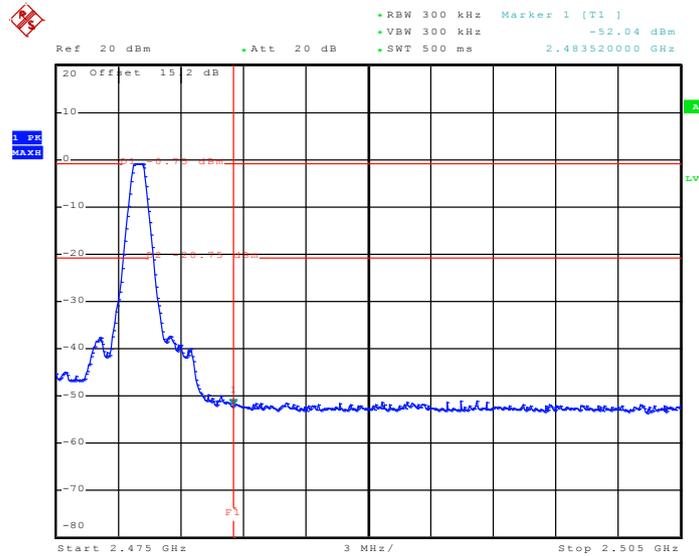

Date: 12.JUN.2010 15:54:08

## 3.7 Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band.


### 3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW)  $\geq$  RBW, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

### 3.7.4 Test Setup

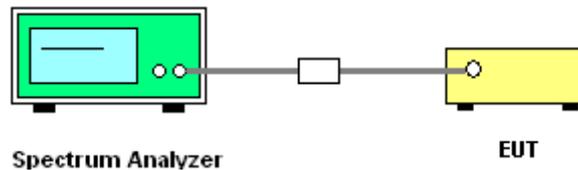




### 3.7.5 Test Result


Test Mode :	Mode 1	Temperature :	20~21°C
Test Channel :	00	Relative Humidity :	40~41%
		Test Engineer :	Sky Liu

#### Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

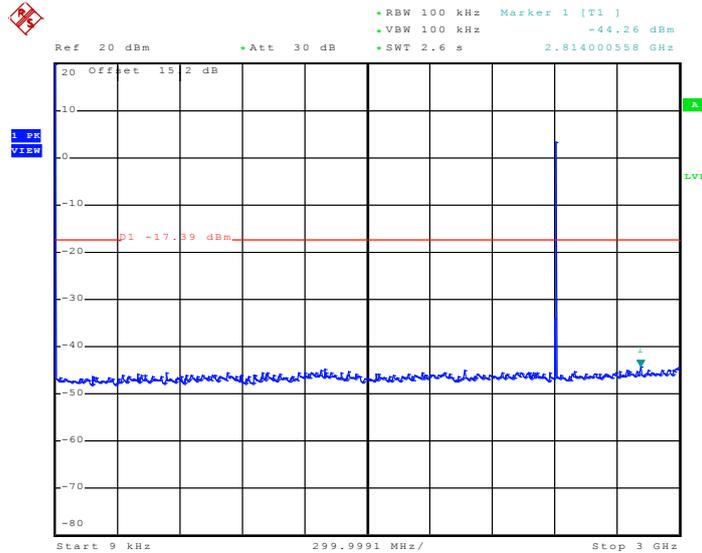

Date: 12.JUN.2010 16:01:07

#### Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

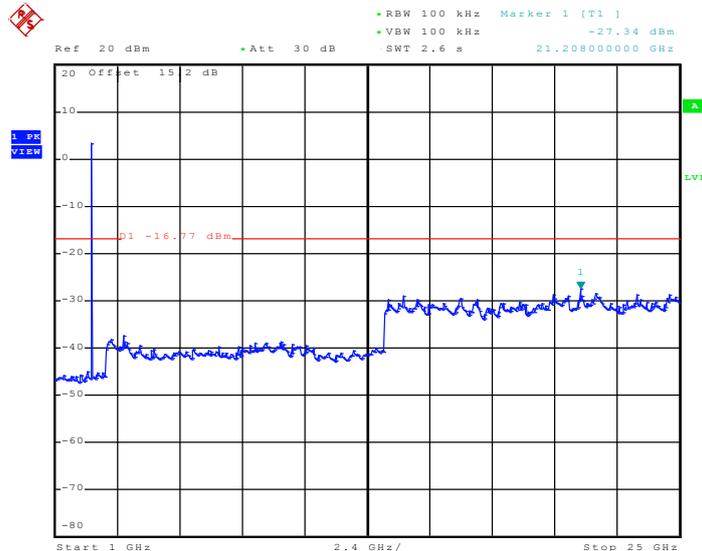


Date: 12.JUN.2010 15:57:04




Test Mode :	Mode 2	Temperature :	20~21°C
Test Channel :	39	Relative Humidity :	40~41%
		Test Engineer :	Sky Liu

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

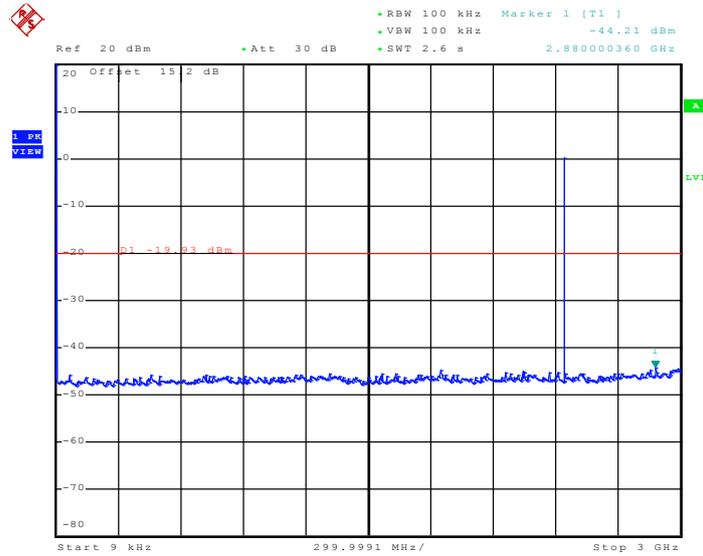

Date: 12.JUN.2010 16:02:28

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

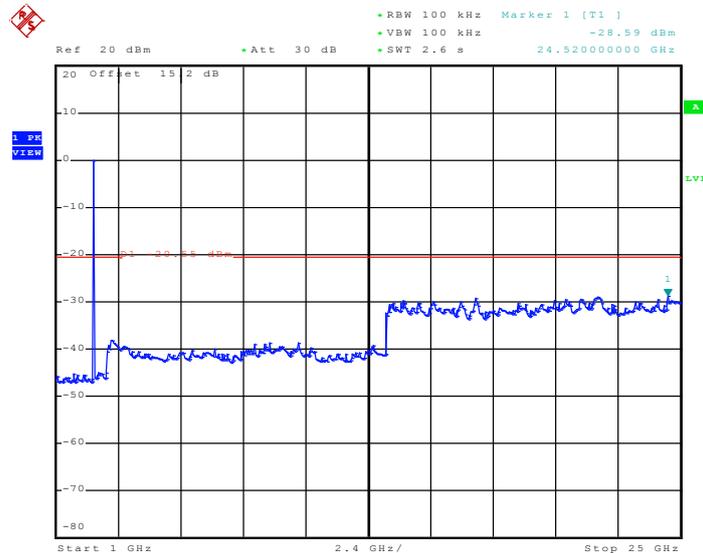


Date: 12.JUN.2010 15:58:19




Test Mode :	Mode 3	Temperature :	20~21°C
Test Channel :	78	Relative Humidity :	40~41%
		Test Engineer :	Sky Liu

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

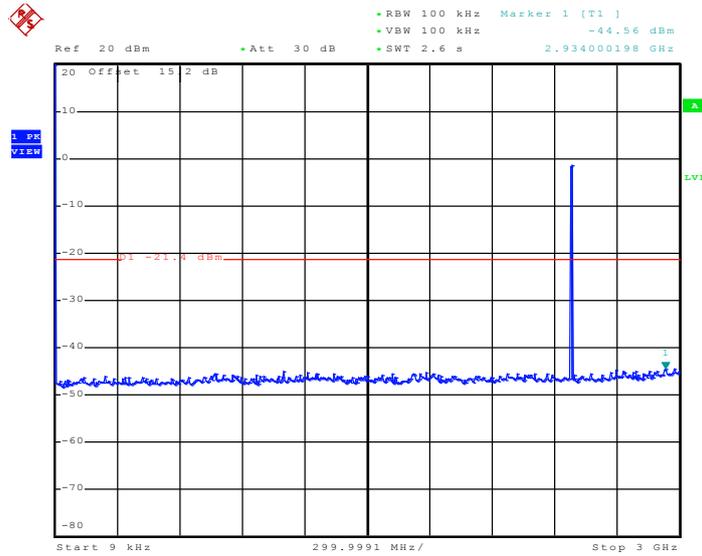

Date: 12.JUN.2010 16:03:47

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

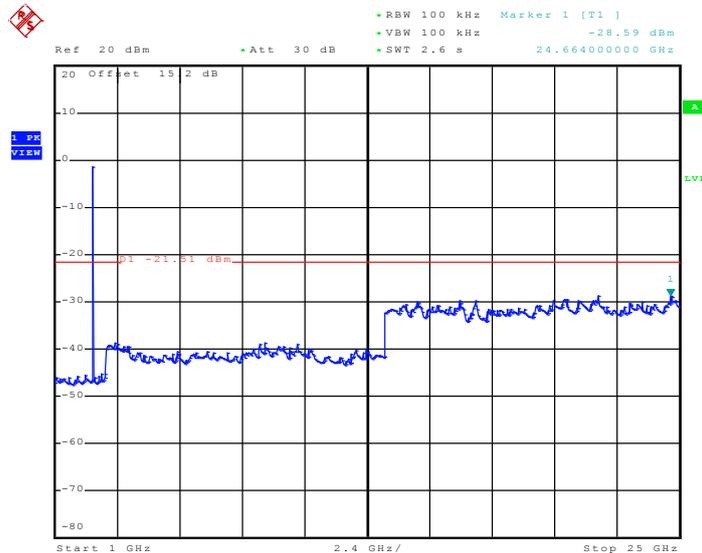

Date: 12.JUN.2010 15:59:04

## 3.8 AC Conducted Emission Measurement

### 3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.8.3 Test Procedures

1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.8.4 Test Setup

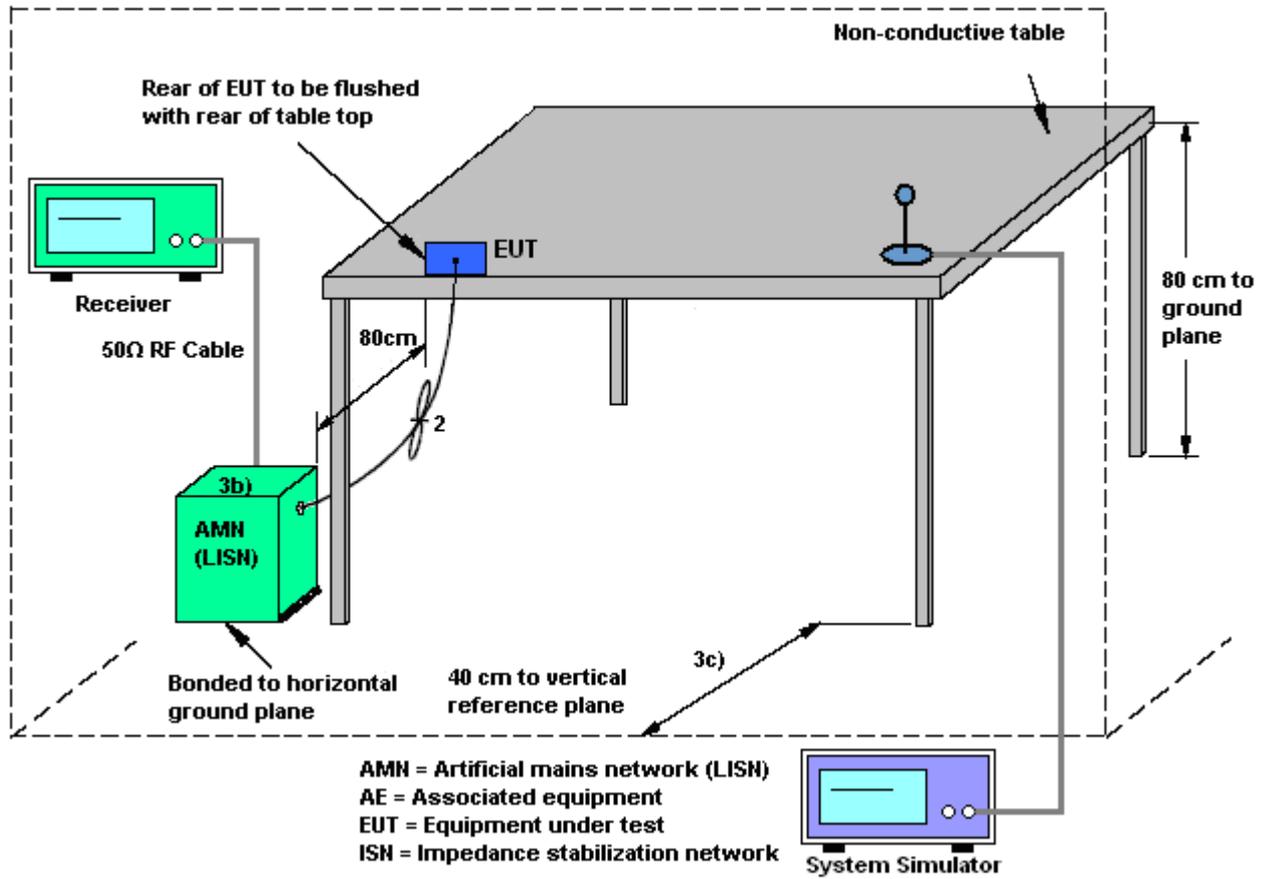



3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~23°C
Test Engineer :	Terry Wang	Relative Humidity :	42~43%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

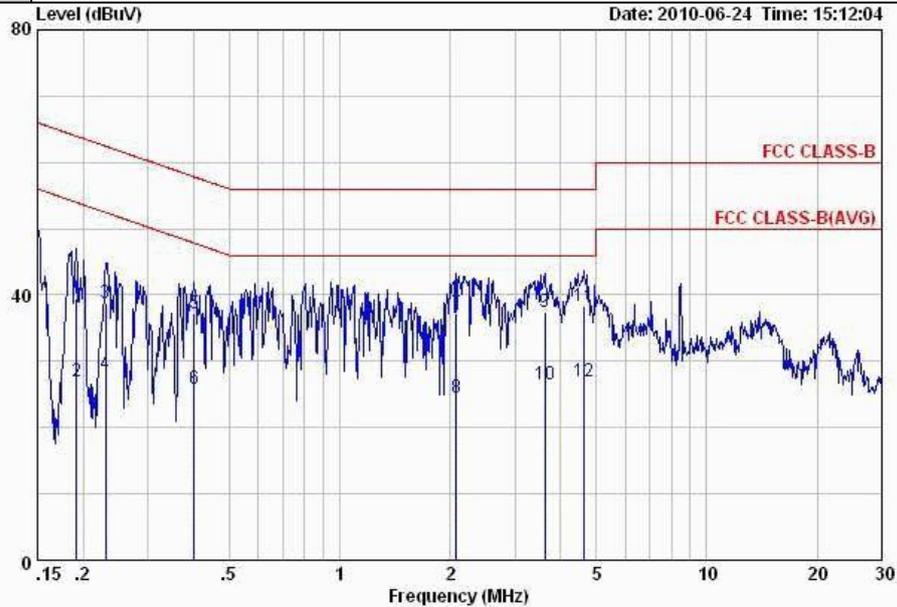


Condition: FCC CLASS-B LISN-071001 LINE

Power : 120Vac/60Hz  
Mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.19	39.38	-24.58	63.96	29.30	-0.07	10.15	QP
2	0.19	26.88	-27.08	53.96	16.80	-0.07	10.15	Average
3	0.23	38.69	-23.74	62.43	28.60	-0.07	10.16	QP
4	0.23	28.19	-24.24	52.43	18.10	-0.07	10.16	Average
5	0.40	37.11	-20.70	57.81	27.00	-0.08	10.19	QP
6	0.40	25.81	-22.00	47.81	15.70	-0.08	10.19	Average
7	2.08	37.12	-18.88	56.00	26.90	-0.11	10.33	QP
8	2.08	24.52	-21.48	46.00	14.30	-0.11	10.33	Average
9	3.62	37.36	-18.64	56.00	27.10	-0.12	10.38	QP
10	3.62	26.56	-19.44	46.00	16.30	-0.12	10.38	Average
11	4.62	38.27	-17.73	56.00	28.00	-0.13	10.40	QP
12	4.62	26.97	-19.03	46.00	16.70	-0.13	10.40	Average



Test Mode :	Mode 1	Temperature :	22~23°C
Test Engineer :	Terry Wang	Relative Humidity :	42~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

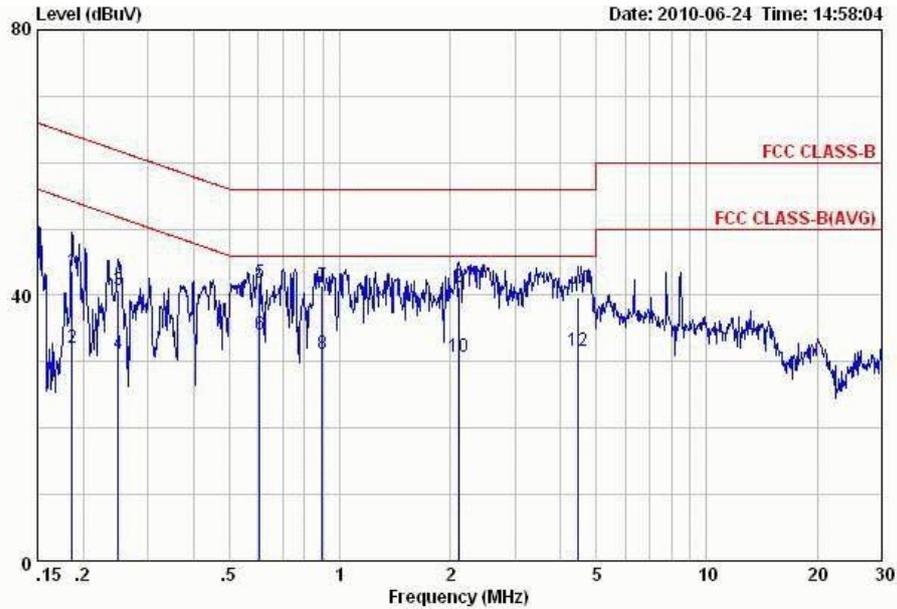

Condition: FCC CLASS-B LISN-071001 NEUTRAL

Power : 120Vac/60Hz  
Mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.19	43.57	-20.63	64.20	33.49	-0.07	10.15	QP
2	0.19	32.07	-22.13	54.20	21.99	-0.07	10.15	Average
3	0.25	40.69	-21.11	61.80	30.60	-0.07	10.16	QP
4	0.25	31.09	-20.71	51.80	21.00	-0.07	10.16	Average
5	0.60	41.84	-14.16	56.00	31.70	-0.08	10.22	QP
6	0.60	34.04	-11.96	46.00	23.90	-0.08	10.22	Average
7	0.89	41.47	-14.53	56.00	31.31	-0.09	10.25	QP
8	0.89	31.27	-14.73	46.00	21.11	-0.09	10.25	Average
9	2.12	41.23	-14.77	56.00	31.00	-0.11	10.34	QP
10	2.12	30.73	-15.27	46.00	20.50	-0.11	10.34	Average
11	4.48	39.76	-16.24	56.00	29.50	-0.13	10.39	QP
12	4.48	31.56	-14.44	46.00	21.30	-0.13	10.39	Average

### 3.9 Radiated Emission Measurement

#### 3.9.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.9.2 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.9.3 Test Procedures


1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
  - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
  - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.  
 Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

### 3.9.4 Test Setup

For radiated emissions below 30MHz

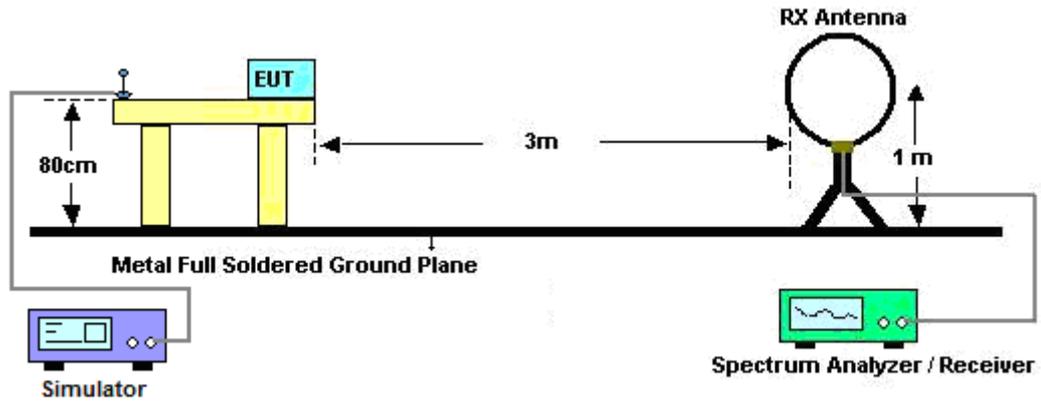

For radiated emissions above 30MHz

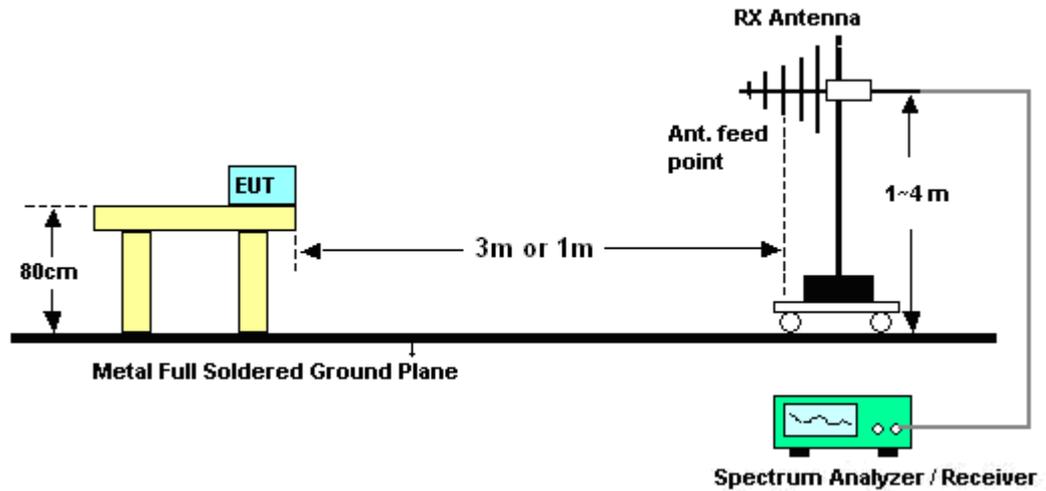



3.9.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Haitao Yin	Temperature :	21~22°C	
		Relative Humidity :	41~42%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



3.9.6 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)

Test Mode :	Mode 1	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	41~42%
Test Engineer :	Haitao Yin	Polarization :	Horizontal
Remark :	2402 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.27	20.96	-19.04	40	25.86	18	0.25	23.15	-	-	Peak
88.86	23.99	-19.51	43.5	37.98	8.61	0.4	23	-	-	Peak
266.52	25	-21	46	34.96	12.29	0.75	23	-	-	Peak
898.5	28.01	-17.99	46	27.2	20.45	1.29	20.93	-	-	Peak
932.8	28.72	-17.28	46	27.33	20.65	1.31	20.57	100	154	Peak
979.7	28.87	-25.13	54	26.86	20.96	1.34	20.29	-	-	Peak
2350.09	33.61	-20.39	54	32.54	32.78	3.12	34.83	100	69	Average
2350.09	45.97	-28.03	74	44.9	32.78	3.12	34.83	-	-	Peak
2402	97.52	-	-	96.35	32.86	3.15	34.84	-	-	Peak
2402	85.04	-	-	83.87	32.86	3.15	34.84	100	345	Average
2488.41	45.87	-28.13	74	44.47	33.05	3.2	34.85	-	-	Peak
2488.41	31.98	-22.02	54	30.58	33.05	3.2	34.85	100	69	Average
4804	48.72	-25.28	74	43.1	35.17	4.65	34.2	-	-	Peak
4804	35.44	-18.56	54	29.82	35.17	4.65	34.2	115	23	Average



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2402 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	22.35	-17.65	40	27.25	18	0.25	23.15	-	-	Peak
67.53	24.4	-15.6	40	41.77	5.27	0.36	23	-	-	Peak
88.86	29.12	-14.38	43.5	43.11	8.61	0.4	23	100	171	Peak
850.2	27.99	-18.01	46	27.57	20.51	1.26	21.35	-	-	Peak
939.8	28.05	-17.95	46	26.56	20.69	1.31	20.51	-	-	Peak
979.7	29.32	-24.68	54	27.31	20.96	1.34	20.29	-	-	Peak
2350.47	45.75	-28.25	74	44.68	32.78	3.12	34.83	-	-	Peak
2350.47	33.36	-20.64	54	32.29	32.78	3.12	34.83	100	46	Average
2402	96.42	-	-	95.25	32.86	3.15	34.84	-	-	Peak
2402	85.47	-	-	84.3	32.86	3.15	34.84	100	9	Average
2484.61	45.26	-28.74	74	43.9	33.01	3.2	34.85	-	-	Peak
2484.61	31.95	-22.05	54	30.59	33.01	3.2	34.85	100	226	Average
4804	47.81	-26.19	74	42.19	35.17	4.65	34.2	-	-	Peak
4804	40.35	-13.65	54	34.73	35.17	4.65	34.2	100	335	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2441 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	22.03	-17.97	40	26.93	18	0.25	23.15	-	-	Peak
88.86	24.5	-19	43.5	38.49	8.61	0.4	23	-	-	Peak
266.52	23.4	-22.6	46	33.36	12.29	0.75	23	-	-	Peak
773.9	28.62	-17.38	46	29.23	19.88	1.21	21.7	112	197	Peak
932.8	28.4	-17.6	46	27.01	20.65	1.31	20.57	-	-	Peak
973.4	28.9	-25.1	54	26.97	20.9	1.34	20.31	-	-	Peak
2337.55	46.02	-27.98	74	76.71	1.04	3.1	34.83	100	65	Peak
2337.55	31.8	-22.2	54	30.75	32.78	3.1	34.83	100	65	Average
2441	94.07	-	-	124.38	1.36	3.18	34.85	100	346	Peak
2441	81.7	-	-	112.01	1.36	3.18	34.85	100	346	Average
2484.42	31.79	-22.21	54	30.43	33.01	3.2	34.85	100	225	Average
2484.42	45.68	-28.32	74	75.88	1.45	3.2	34.85	100	225	Peak
4882	49.31	-24.69	74	73.98	4.82	4.71	34.2	100	311	Peak
4882	42.4	-11.6	54	36.71	35.18	4.71	34.2	100	311	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2441 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	21.67	-18.33	40	26.57	18	0.25	23.15	-	-	Peak
83.46	21.8	-18.2	40	37.06	7.34	0.4	23	-	-	Peak
88.86	28.48	-15.02	43.5	42.47	8.61	0.4	23	100	176	Peak
888.7	28.07	-17.93	46	27.37	20.46	1.29	21.05	-	-	Peak
934.9	28.68	-17.32	46	27.27	20.66	1.31	20.56	-	-	Peak
978.3	28.94	-25.06	54	26.94	20.96	1.34	20.3	-	-	Peak
2331.09	45.27	-28.73	74	76.03	0.97	3.1	34.83	100	124	Peak
2331.09	31.62	-22.38	54	30.59	32.76	3.1	34.83	100	124	Average
2441	96.59	-	-	126.9	1.36	3.18	34.85	100	11	Peak
2441	84.15	-	-	114.46	1.36	3.18	34.85	100	11	Average
2484.42	46.48	-27.52	74	76.68	1.45	3.2	34.85	100	226	Peak
2484.42	31.94	-22.06	54	30.58	33.01	3.2	34.85	100	226	Average
4882	51.68	-22.32	74	76.35	4.82	4.71	34.2	100	350	Peak
4882	44.42	-9.58	54	38.73	35.18	4.71	34.2	100	350	Average



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2480 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	21.01	-18.99	40	25.91	18	0.25	23.15	-	-	Peak
88.86	26.13	-17.37	43.5	40.12	8.61	0.4	23	-	-	Peak
266.52	23.52	-22.48	46	33.48	12.29	0.75	23	-	-	Peak
878.9	27.93	-18.07	46	27.32	20.47	1.28	21.14	-	-	Peak
933.5	28.88	-17.12	46	27.48	20.65	1.31	20.56	142	161	Peak
976.9	29.14	-24.86	54	27.17	20.94	1.34	20.31	-	-	Peak
2355.6	45.84	-28.16	74	76.45	1.1	3.12	34.83	100	181	Peak
2355.6	31.58	-22.42	54	30.48	32.81	3.12	34.83	100	181	Average
2480	93.54	-	-	123.74	1.45	3.2	34.85	100	343	Peak
2480	81.39	-	-	80.03	33.01	3.2	34.85	100	343	Average
2483.5	46.79	-7.21	54	45.43	33.01	3.2	34.85	100	343	Average
2483.5	56.72	-17.28	74	86.92	1.45	3.2	34.85	100	343	Peak
4960	50.04	-23.96	74	74.3	5.17	4.77	34.2	100	312	Peak
4960	44.05	-9.95	54	38.28	35.2	4.77	34.2	100	312	Average



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2480 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.54	22.7	-17.3	40	28.3	17.29	0.26	23.15	-	-	Peak
83.19	22.15	-17.85	40	37.41	7.34	0.4	23	-	-	Peak
88.86	30.51	-12.99	43.5	44.5	8.61	0.4	23	100	172	Peak
885.2	28.12	-17.88	46	27.45	20.46	1.28	21.07	-	-	Peak
938.4	28.5	-17.5	46	27.04	20.68	1.31	20.53	-	-	Peak
976.2	29.28	-24.72	54	27.32	20.93	1.34	20.31	-	-	Peak
2342.68	31.43	-22.57	54	30.36	32.78	3.12	34.83	100	66	Average
2342.68	47.53	-26.47	74	78.2	1.04	3.12	34.83	100	66	Peak
2480	97.7	-	-	127.9	1.45	3.2	34.85	100	40	Peak
2480	84.77	-	-	83.41	33.01	3.2	34.85	100	40	Average
2483.5	60.64	-13.36	74	90.84	1.45	3.2	34.85	100	40	Peak
2483.5	50.04	-3.96	54	48.68	33.01	3.2	34.85	100	40	Average
4962	51.3	-22.7	74	75.56	5.17	4.77	34.2	100	329	Peak
4962	44.93	-9.07	54	39.16	35.2	4.77	34.2	100	329	Average



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Connected Construction**

The antennas type used in this product is Chip Antenna without connector and it is considered to meet antenna requirement.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Jan. 18, 2010	Jan. 17, 2011	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY4510155 5	N/A	Aug. 27, 2009	Aug. 26, 2010	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY4442119 8	N/A	Aug. 28, 2009	Aug. 27, 2010	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 17, 2009	Nov. 16, 2010	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Jan. 18, 2010	Jan. 17, 2011	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Jan. 18, 2010	Jan. 17, 2011	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000 811	N/A	Nov. 26, 2009	Nov. 25, 2010	Conduction (CO01-KS)
System Simulator	R&S	CMU200	837587/066	Full-Band	Jan. 08, 2009	Jan. 07, 2011	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESCI	100724	9kHz – 2.75GHz	Mar. 09, 2010	Mar. 08, 2011	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060004	30MHz~2GHz	Feb. 02, 2010	Feb. 01, 2011	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A0237 0	1GHz~26.5GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Actice hore antenna	com-power	AHA-118	701023	1G-18GHz	Nov. 18, 2009	Nov. 17, 2010	Radiation (03CH01-KS)
Signal Generator	R&S	SMR40	100455	10MHz~40GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA17024 9	15-40GHz	Oct. 22, 2009	Oct. 21, 2010	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 28, 2008	Jul. 27, 2010	Radiation (03CH01-KS)
Bluetooth Base Station	ANRITSU	MT8852B	6K0000493 5	BT EDR	Sep. 17, 2009	Sep. 16, 2010	Radiation (03CH01-KS)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.13</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.54</b>		

**Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)**

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>4.72</b>				