



No. DAT-P-114/01-01

# TEST REPORT

No. 2008TAR004

<b>Product</b>	WCDMA/GPRS/GSM/EDGE Mobile Phone with Bluetooth
<b>Model</b>	U1100/Vodafone 625/V625
<b>Client</b>	Huawei Technologies Co., Ltd.

**Telecommunication Metrology Center  
of Ministry of Information Industry**

## Notice

1. The test report shall be invalid if there is no “specified stamp for the test report” or the stamp of the test organization on it.
2. Copies of the test report shall be invalid if there is no “specified stamp for the test report” or the stamp of the test organization on it.
3. The test report shall be invalid if there are no signatures of the testing person, reviewing person and approving person on it.
4. The test report shall be invalid if it is altered.
5. Any demurral about the test shall be put forward to the testing organization within 15 days after the receiving of the test report.
6. This test report standalone dose not constitute or imply by its own an approval of the product by any Certification Authorities or Competent Bodies.
7. This report is only valid if complete, and test report shall not be reproduced except in full, without written approval of the laboratory.
8. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of Telecommunication Metrology Center of MII and the Accreditation Bodies, if it applies.

Address: No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China  
(Telecommunication Metrology Center of MII)

Post code: 100083

Telephone: +86 10 62302041

Fax: +86 10 62304793

Web site: <http://www.emcite.com>

E-mail: [welcome@emcite.com](mailto:welcome@emcite.com)

## TABLE OF CONTENT



<b>1. COMPETENCE AND WARRANTIES .....</b>	<b>5</b>
<b>2. Testing Laboratory .....</b>	<b>5</b>
<b>2.1 Testing Location .....</b>	<b>5</b>
<b>2.2 Testing Environment.....</b>	<b>5</b>
<b>2.3 Testing Period .....</b>	<b>6</b>
<b>3. Applicant Information .....</b>	<b>6</b>
<b>3.1 Client Information.....</b>	<b>6</b>
<b>3.2 Manufacture Information .....</b>	<b>7</b>
<b>4. Equipment Under Test (EUT) and Ancillary Equipment (AE).....</b>	<b>7</b>
<b>4.1 About EUT .....</b>	<b>7</b>
<b>4.2 Internal Identification of EUT used during the test.....</b>	<b>7</b>
<b>4.3 Photographs of EUT.....</b>	<b>7</b>
<b>5. SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>6. MAIN TEST INSTRUMENTS .....</b>	<b>8</b>
<b>ANNEX A MEASUREMENT RESULTS .....</b>	<b>9</b>
<b>ANNEX B PHOTOGRAPH OF EUT.....</b>	<b>12</b>
<b>ANNEX C TEST LAYOUT.....</b>	<b>18</b>

**Telecommunication Metrology Center  
of Ministry of Information Industry**

No. 2008TAR004

Page 4 of 18

<b>Product</b>	WCDMA/GPRS/GSM/ED GE Mobile Phone with Bluetooth	<b>Model</b>	U1100/Vodafone 625/V625
		<b>Trade mark</b>	HUAWEI/VODAFONE
<b>Client</b>	Huawei Technologies Co., Ltd.		
<b>Manufacturer</b>	Huawei Technologies Co., Ltd.		
<b>Arrival Date of sample</b>	March 4 <sup>th</sup> , 2008	<b>Carrier of the samples</b>	Xieyan
<b>Quantity of the samples</b>	1	<b>Date of product</b>	/
<b>Series number</b>	EUT1: 35241802000555705		
<b>Standard(s)</b>	FCC Part 15 (10-1-06 Edition)		
<b>Conclusion</b>	<p align="center"><b>Final Judgment: Pass</b></p> <p align="right">Date of issue: 2008-03-18</p>		
<b>Comment</b>	The test result relates only to the tested samples.		

Approved by  Reviewed by  Tested by   
 (Lu Bingsong) (Song Chongwen) (Zi Xiaogang)  
 (Lu Bingsong - Deputy Director of the laboratory)

## 1. COMPETENCE AND WARRANTIES

**Telecommunication Metrology Center of Ministry of Information Industry (hereinafter TMC)** is a test laboratory accredited by DAR (DATEch) – Deutschen Akkreditierungs Rat (Deutsche Akkreditierungsstelle Technik), for the tests indicated in the Certificate No. **DAT-P-114/01-01**.

**TMC** is a test laboratory accredited by CNAS–China national Accreditation Service for Conformity Assessment, for the tests indicated in the Certificate No. **L0442**.

**TMC** is FCC listed lab. FCC listed number is **733176**.

The test site in **TMC** is registered in Industry Canada. The IC registration number is **6629**.

**TMC** is a testing laboratory competent to carry out the tests described in this report.

**TMC** guarantees the reliability of the data presented in this report, which is the result of measurements and tests performed to the item under test on the date and under the conditions stated on the report and is based on the knowledge and technical facilities available at TMC at the time of execution of the test.

**TMC** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the item under test and the results of the test.

## 2. Testing Laboratory

### 2.1 Testing Location

Company Name:	Telecommunication Metrology Center of Ministry of Information Industry
Address:	No 52, Huayuan beilu, Haidian District, Beijing, P.R.China
Postal Code:	100083
Telephone:	00861062303288
Fax:	00861062304793

### 2.2 Testing Environment

**Semi-anechoic chamber** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 26 to 1000 MHz

**Telecommunication Metrology Center  
of Ministry of Information Industry**

No. 2008TAR004

Page 6 of 18

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber** (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 26 to 1000 MHz

### 2.3 Testing Period

Testing Start Date:	March 6,2008
Testing End Date:	March 12,2008

## 3. Applicant Information

### 3.1 Client Information

Name or Company	Huawei Technologies Co., Ltd.
Address/Post	Huawei Base, Bantian, Longgang District, Shenzhen,518129, P.R. China
City	Shenzhen
Postal Code	518129
Country	China
Telephone	8610—82836505
Fax	8610—82836567

**Telecommunication Metrology Center  
of Ministry of Information Industry**

No. 2008TAR004

Page 7 of 18

### 3.2 Manufacture Information

Name or Company	Huawei Technologies Co., Ltd.
Address/Post	Huawei Base, Bantian, Longgang District, Shenzhen, 518129, P.R. China
City	Shenzhen
Postal Code	518129
Country	China
Telephone	8610—82836505
Fax	8610—82836567

## 4. Equipment under Test (EUT) and Ancillary Equipment (AE)

### 4.1 About EUT

Model	U1100/Vodafone 625/V625
FCC ID	QISU1100
Hardware status	HD1U110M VER.C
Software status	V100R001C01B100
Power supply	Battery or Charger (AC Adaptor)

### 4.2 Internal Identification of EUT used during the test

EUT ID	SN or IMEI	HW Version	SW Version
EUT1	35241802000555705	HD1U110M VER.C	V100R001C01B100

### 4.3 Photographs of EUT

Photographs of MS Hand Telephone Set and Charger are respectively shown in ANNEX B of this test report.

## 5. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

**Telecommunication Metrology Center  
of Ministry of Information Industry**

No. 2008TAR004

Page 8 of 18

**6. MAIN TEST INSTRUMENTS**

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURER	CAL DUE DATE
1	Test Receiver	ESS	847151/015	R&S	2008-10-30
2	Test Receiver	ESI40	831564/002	R&S	2009-2-11
3	BiLog Antenna	3142B	9908-1403	EMCO	2009-1-16
4	BiLog Antenna	VUL9163	9163 175	Schwarzbeck	2009-9-19
5	Signal Generator	SMT06	831285/005	R&S	2008-12-26
6	Signal Generator	SMP04	100070	R&S	2008-4-20
7	LISN	ESH2-Z5	829991/012	R&S	2008-8-13
8	Spectrum Analyzer	E4440A	MY41000262	Agilent	2008-4-18
9	Universal Radio Communication Tester	CMU200	100680	R&S	2008-8-23
10	Dual-Ridge Waveguide Horn Antenna	3115	9906-5827	EMCO	2008-3
11	Dual-Ridge Waveguide Horn Antenna	3116	2663	EMCO	2008-3
12	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2008-3
13	Climatic chamber	SH-241	92003546	ESPEC	2008-5-15
14	Spectrum Analyzer	FSU26	200030	R&S	2008-6-19
15	Bluetooth Tester	MT8852A	6K0002698	Anritsu	2009-3-19

## ANNEX A MEASUREMENT RESULTS

### A.1 Radiated Emission (§15.109(a))

#### A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS) at a distance of 3 meters is tested. The test set-up please refers to Annex C.1.


#### A.1.2 EUT Operating Mode:

The MS is operating in the USB mode. During the test MS is connected to a laptop via a USB cable. The model of the laptop is IBM T42 2373-M6C, and the serial number of the laptop is 99-FV6P2. The software is used to let the laptop keep on copying data to MS, reading and erasing the data after copy action was finished.


#### A.1.3 Measurement Limit

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

#### A.1.4 Measurement Results

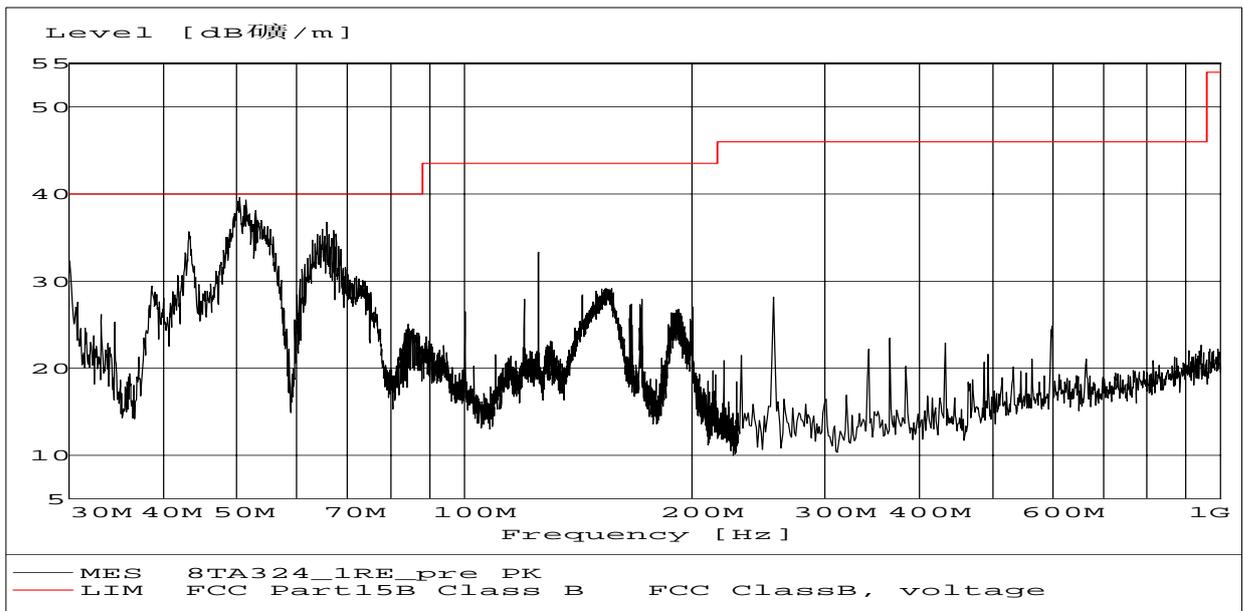

**Figure A.1 Radiated Emission from 30MHz to 1GHz**

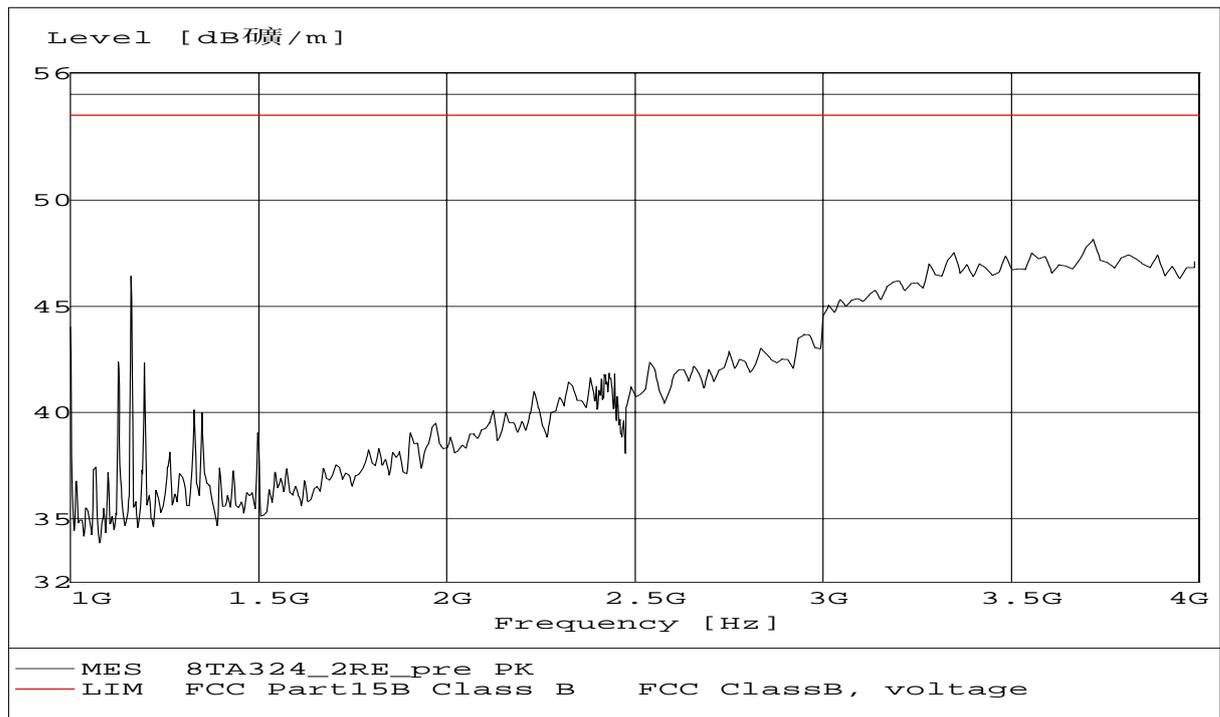

**Figure A.2 Radiated Emission from 1GHz to 4GHz**

**A.2 Conducted Emission (§15.107(a))**

**A.2.1 Method of measurement**

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits. The test set-up please refers to Annex C.2.

**A.2.2 EUT Operating Mode:**


The MS is operating in the USB mode. During the test MS is connected to a laptop via a USB cable. The model of the laptop is IBM T42 2373-M6C, and the serial number of the laptop is 99-FV6P2. The software is used to let the laptop keep on copying data to MS, reading and erasing the data after copy action was finished.

**A.2.3 Measurement Limit**

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

**A.2.4 Measurement Results**

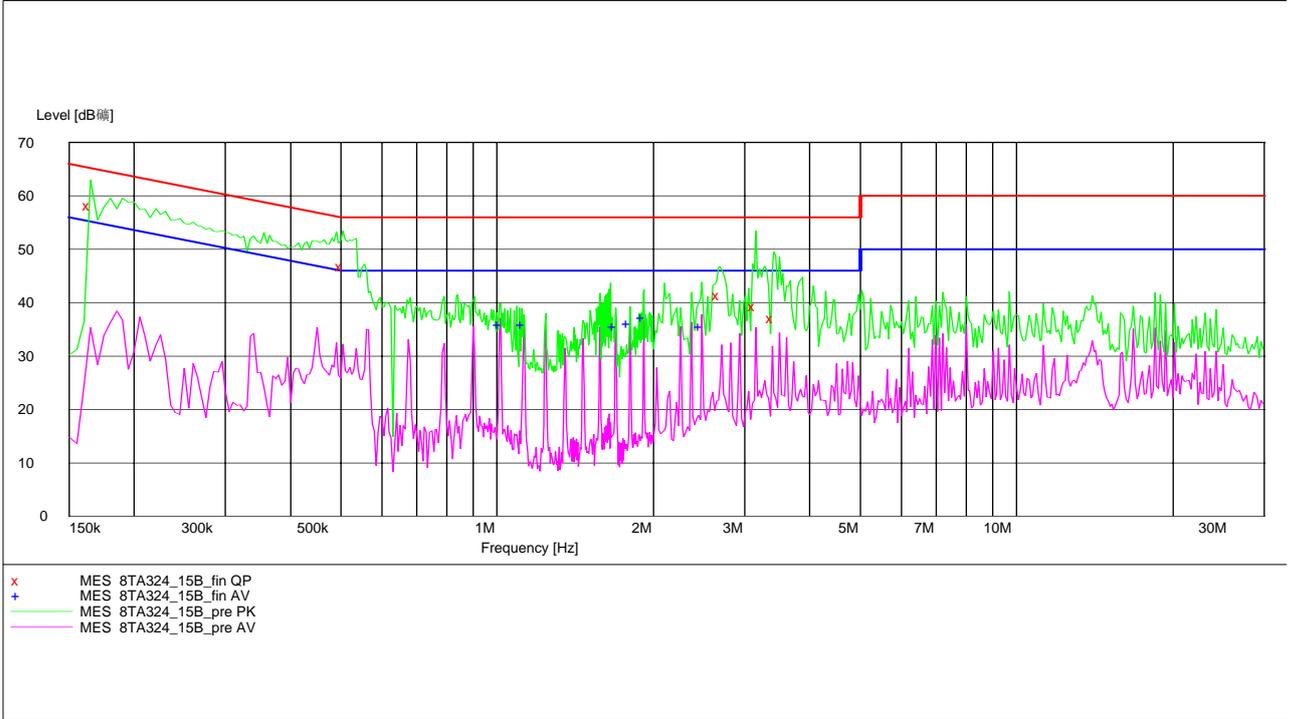

**Figure A.3 Conducted Emission**

**MEASUREMENT RESULT: "8TA324\_15B\_fin QP"**

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.165000	58.10	10.1	65	7.1	L1	FLO
0.505000	46.70	10.1	56	9.3	L1	FLO
2.685775	41.30	10.1	56	14.7	N	GND
3.149781	39.30	10.1	56	16.7	L1	GND
3.411031	37.10	10.1	56	19.0	N	GND

**MEASUREMENT RESULT: "8TA324\_15B\_fin AV"**

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
1.015000	36.00	10.1	46	10.0	N	GND
1.125000	36.00	10.1	46	10.0	N	GND
1.690000	35.60	10.1	46	10.4	N	GND
1.800000	36.20	10.1	46	9.8	N	GND
1.915000	37.30	10.1	46	8.7	N	GND
2.480072	35.50	10.1	46	10.5	N	GND

**ANNEX B PHOTOGRAPH OF EUT**

**External Photo**



**Mobile Phone**



**Mobile Phone**



Charger (AC/DC Adapter)



Label of Charger (AC/DC Adapter)



Battery



Battery

Internal Photo



Mobile phone Disassembly




Mobile phone Disassembly



Mobile phone Disassembly



Mobile phone Disassembly

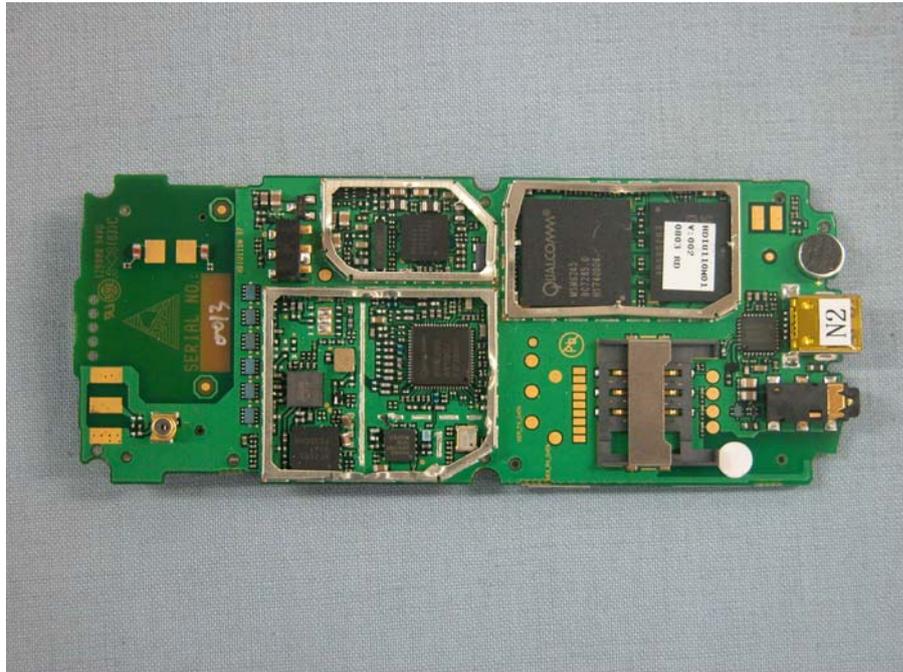

Mobile phone Disassembly

**ANNEX C TEST LAYOUT**



**Pic C.1 Radiated Emission**



**Pic C.2 Conducted Emission**

**\*\*\*END OF REPORT BODY\*\*\***