



FCC&IC RF Test Report

Product Name: UMTS/GPRS/GSM/EDGE Mobile Phone

Model Number: U2801-34

Report No: SYBH(Z-RF)001092011-2003

FCC ID: QISU2801-34

IC ID: 6369A-U280134

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



REGULATION	FCC CFR47 Part 2: Subpart J
	FCC CFR47 Part 27 : Subpart C&L
	IC RSS-Gen Issue 3
	IC RSS-139 Issue 2
START OF TEST	Aug.29, 2011
END OF TEST	Aug.31, 2011
Final Judgement:	Pass

Approved By

Sep.02, 2011
Date

Dai Linjun
Name

Dai Linjun
Signature

Reviewed By

Sep.02, 2011
Date

Cousy Xu
Name

Cousy XU
Signature

Operator

Sep.02, 2011
Date

Huang Qiuliang
Name

Huang Qiuliang
Signature



Contents

1	<u>Summary</u>	5
2	<u>Product Description</u>	6
2.1	PRODUCTION INFORMATION	6
2.2	MODIFICATION INFORMATION	6
3	<u>Test Site Description</u>	7
3.1	TESTING PERIOD	7
3.2	GENERAL SET UP DESCRIPTION	7
4	<u>Product Description</u>	8
4.1	TECHNICAL CHARACTERISTICS.....	8
4.2	EUT IDENTIFICATION LIST.....	10
5	<u>Main Test Instruments</u>	11
6	<u>Transmitter Measurements</u>	12
6.1	EFFECTIVE ISOTROPIC RADIATED POWER OF TRANSMITTER (EIRP)	12
6.2	CONDUCTED POWER OF TRANSMITTER	15
6.3	MODULATION CHARACTERISTICS.....	17
6.4	OCCUPIED BANDWIDTH.....	19
6.5	BAND EDGES COMPLIANCE	21
6.6	SPURIOUS EMISSION AT ANTENNA TERMINAL.....	23
6.7	FIELD STRENGTH OF SPURIOUS EMISSIONS.....	25
6.8	RECEIVER SPURIOUS EMISSIONS	28
6.9	FREQUENCY STABILITY	30
7	<u>System Measurement Uncertainty</u>	33
8	<u>Appendices</u>	34



1 Summary

The table below summarizes the measurements and results for the EUT. Detailed results and descriptions are shown in the following pages.

Table 1 Summary of results

FCC Measurement Specification	IC Measurement Specification Part(s)	FCC Limits Part(s)	RSS-139 Limits Part(s)	Description	Result
2.1046	RSS-Gen 4.8	27.50(d)(2)	6.4	Effective Radiated Power of Transmitter	PASS
2.1046	RSS-Gen 4.8	27.50(d)(2)	/	Conducted Power of Transmitter	PASS
2.1047	/	/	6.2	Modulation Characteristics	PASS
2.1049	RSS-Gen 4.6	/	/	Occupied Bandwidth	PASS
2.1051	/	27.53(h)	6.5	Band Edges Compliance	PASS
2.1051	RSS-Gen 4.9	27.53(h)	6.5	Spurious Emission at Antenna Terminal	PASS
2.1053	RSS-Gen 4.9	27.53(h)	6.5	Field Strength of Spurious Emissions	PASS
/	RSS-Gen 4.10	/	6.6	Receiver Spurious Emissions	PASS
2.1055	RSS-Gen 4.7	27.54	6.3	Frequency Stability	PASS

2 Product Description

2.1 Production Information

2.1.1 General Description

UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth U2801-34/U2801-34 is subscriber equipment in the WCDMA/GSM system. The UMTS frequency band is Band IV, and the band test data included in this report. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. The Mobile Phone implements such functions as RF signal receiving/transmitting, UMTS and GSM/GPRS/EDGE protocol processing, voice, MMS service, GPS etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

2.1.2 Support function and Service

The EUT support the function and service as follows:

Table 2 Service and Test mode List

Service Name	Characteristic	Corresponding Test Mode	Note
Data	Modulation: QPSK	TM1	WCDMA

Note: * The WCDMA test condition & settings are defined in 3GPP TS 34.121 V7.5.0.

2.2 Modification Information

For original equipment, following table is not application.

Table 3 Modification Information

Model Number	Board/Module	Original Version	New Version	Modify Information
Not applicable				



3 Test Site Description

The test site of:

***Huawei Technologies Co. Ltd.
P.O. Box 518129
Huawei base, bantian,
Longgang District, Shenzhen, China***

3.1 Testing Period

The test have been performed during the period of

Aug.29, 2011 – Aug.31, 2011

3.2 General Set up Description

TM1: WCDMA Mode with QPSK Modulation

4 Product Description

4.1 Technical Characteristics

4.1.1 Frequency Range

Table 4 Frequency Range

WCDMA Band IV	
Uplink band:	1710 to 1755 MHz
Downlink band:	2110 to 2155 MHz

4.1.2 Channel Spacing / Separation

Table 5 Channel Spacing / Separation

	WCDMA
Channel Raster	200kHz
Channel spacing:	5MHz

4.1.3 Type of Emission

Table 6 Type of Emission

	WCDMA
Emission Designation:	5M00F9W

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

4.1.4 Environmental Requirements

Table 7 Environmental Requirements

Minimum temperature:	- 10 °C
Maximum temperature:	+ 55 °C
Relative Humidity:	5%-95%RH

4.1.5 Power Source

Table 8 Power Source

AC voltage nominal:	~ 220 V
AC voltage range	~ 100 V to ~ 240 V
AC current maximal:	1A

4.1.6 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (9).

Please reference the document Tune-up Procedure in TCF.

4.1.7 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8).

The voltage and current in the final RF stage is:

Table 9 Applied RF Module DC Voltages and Currents

Voltage:	== +3.7V
Current:	1A According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8)

4.2 EUT Identification List

4.2.1 Board Information

Table 1 Board Information

UMTS/GPRS/GSM/EDGE Mobile Phone		
HUAWEI U2801-34		
Board and Module		
Hardware Version	Software Version	S/N
HD1U2801M Ver.C	U2801V100R001CBYB105	N6S2A11172500030

4.2.2 Adapter Technical Data

AC/DC Adapter Model:	HS-050040U5	HS-050040U5
Manufacturer:	TECH-POWER INTERNATIONAL CO., LTD.	SHENZHEN HUNTKEY ELECTRIC CO., LTD
Input Voltage:	~ 100-240V 50/60Hz	~ 100-240V 50/60Hz
Output Voltage;	== 5.0 V	== 5.0 V

4.2.3 Battery Technical Data

Battery Model:	HB4A1H
Rated capacity:	900 mAh
Nominal Voltage:	== 3.7 V
Charging Voltage:	== 4.2 V

4.2.4 FCC Identification

Grantee Code: QIS
Product Code: U2801-34
FCC Identification: QISU2801-34

4.2.5 IC Identification

Grantee Code: 6369A
Product Code: U2801-34
IC Identification: 6369A-U280134

5 Main Test Instruments

Table 10 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sep.27,2011
Universal Radio Communication Tester	R&S	CMU200	105822	Oct.24,2011
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug.04,2012
Spectrum Analyzer	Agilent	E4440A	MY49420179	Apr.24,2012
Signal Analyzer	R&S	FSQ40	100025	Oct.09,2011
Signal Analyzer	R&S	FSQ31	200021	Sep.27,2011
Temperature Chamber	ESPEC	MW3030	611403	May.12,2012
Signal Generator	R&S	SMR40	100325	May.12,2012
Vector Signal Generator	R&S	SMU200A	104162	Sep.07,2011
Spectrum Analyzer	R&S	FSU26	EG26725	Mar.07,2012
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	919/1009	Dec.13.2011
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	Dec.13.2011
Horn Antenna	R & S	HF906	359287/005	May.07, 2012
Horn Antenna	R & S	HF906	359287/006	April.27, 2012
Broadband Antenna	SCHAFFNER	CBL 6112B	2536	Sep.21, 2011
Broadband Antenna	SCHAFFNER	CBL 6112B	2941	Jun.11, 2012
Test receiver	R&S	ESU26	36090302083	Jun.17.2012
Horn Antenna	ETS-LINDGREN	3160	60008	Sep.20.2011
Horn Antenna	ETS-LINDGREN	3160	60006	Oct.27.2011

6 Transmitter Measurements

6.1 Effective Isotropic radiated power of Transmitter (EIRP)

6.1.1 Test Conditions

Table 11 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1 at frequency B, M, T

6.1.2 Test Specifications and Limits

6.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and Part 27.50(d)2

6.1.2.2 Supporting Standards

Table 12 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.1.2.3 Limits

Compliance with Part 27.232, mobile/portable stations are limited to 1 watts EIRP peak power.

$W(\text{dBm}) = 10 \cdot \log(W_{\text{in mW}})$.

Table 13 Limits

Maximum Output Power (Watts)	< 1 Watts
Maximum Output Power (dBm)	< 30 dBm


6.1.3 Test Method and Setup

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in

- 2.1033(c)(8). Connect the EUT to the wireless communication tester CMU200 via the air interface. The band is set as AWS.
- (b) Test the Radiated maximum output power by the CMU200 received from test antenna.
 - (c) Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on CMU200, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

Test setup

Step 1: Pre-test

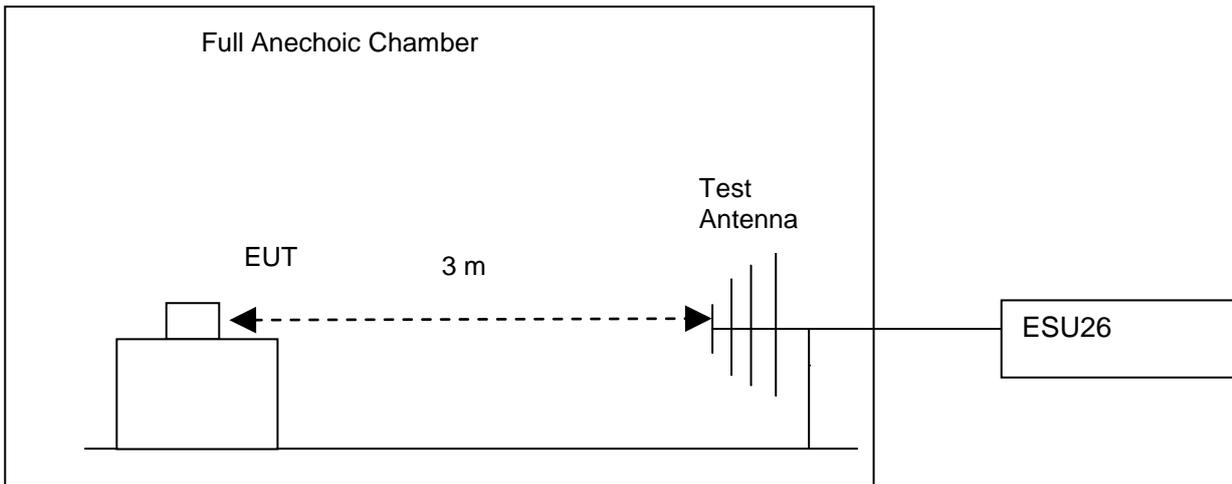

Step 2: Substitution method to verify the maximum EIRP

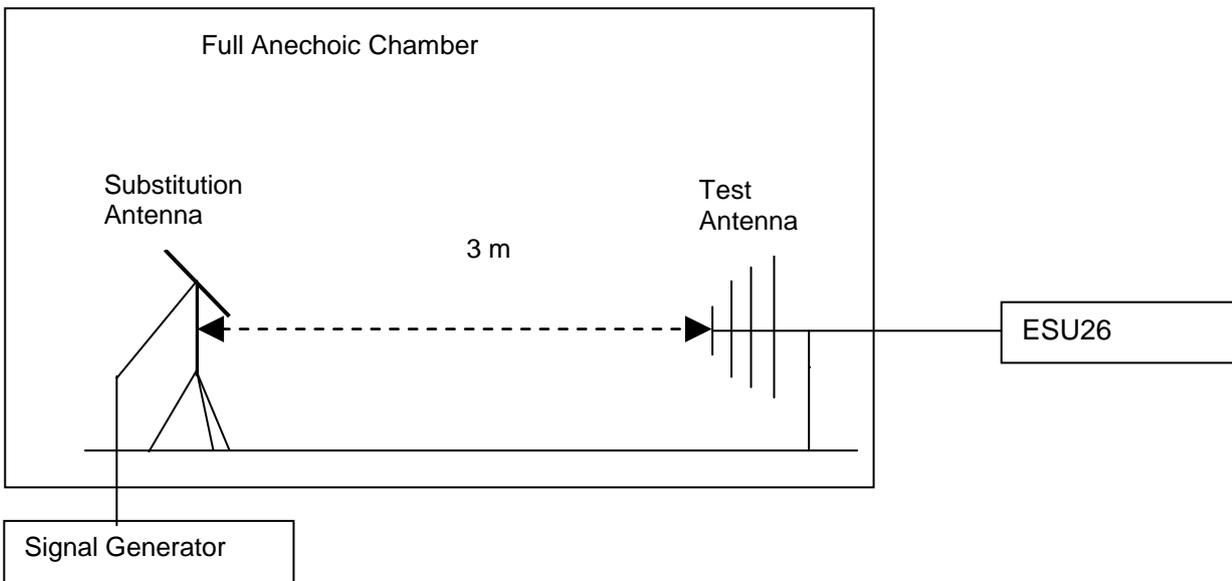


Figure 1. Test Set-up

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

There is a constant difference of 2.15 dB between ERP and EIRP.

$EIRP (dBm) = ERP (dBm) + 2.15$ (ITU-R Recommendation SM.329-10).

6.1.4 Measurement Results

6.1.4.1 Pre-test Results

Table 14 Measurement Results

TEST CONDITIONS	RF Output Power (EIRP)					
	Channel 1312(B)		Channel 1412(M)		Channel 1513(T)	
	1712.4MHz		1732.4MHz		1752.6MHz	
	dBm		dBm		dBm	
T_{nom} (25 °C)/ V_{nom} (3.7V)	Measured	Limit	Measured	Limit	Measured	Limit
TM1	24.65	30	24.83	30	24.68	30

6.1.4.2 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBi]	Cable Loss [dB]	Substitution Level (EIRP) [dBm]	Limit [dBm]	Result
TM1	1712.4	24.65	Horn Ant.	21.18	4.5	1.0	24.68	30	Pass
TM1	1732.4	24.83	Horn Ant.	21.32	4.5	1.0	24.82	30	Pass
TM1	1752.6	24.68	Horn Ant.	20.89	4.8	1.0	24.69	30	Pass

Note: a, For get the EIRP (Effective Isotropic Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{EIRP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBi]}$$

NOTE: SGP- Signal Generator Level

b, Measurement the EIRP with RMS detector.

c, RBW=10kHz, VBW=300kHz, and integrated by the instrument to 5M for TM1

6.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.2 Conducted Power of Transmitter

6.2.1 Test Conditions

Table 15 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1 at Channel B, M, T

6.2.2 Test Specifications and Limits

6.2.2.1 Specification

CFR 47 (FCC) part 2.1047 and Part 27.50(d)(2)

6.2.2.2 Supporting Standards

Table 16 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.2.2.3 Limits

Compliance with Part 27.232, in no any case may the peak power of a mobile station transmitter exceed 2 W. The calculated longitude EIRP by following formula:

$$EIRP(dBm) = 10 * \log (EIRP_{mW}).$$

And for conducted power, we can use Antenna Gain to calculate the limit. So the conducted power:

$$P_{\text{cond.}}(dBm) = EIRP(dBm) - \text{Gain}(dBi).$$

and $\text{Gain}(dBi) = \text{Gain}(dBd) + 2.15dB$

Table 17

Limits

Maximum Output Power	< 1 Watts (30 dBm)
Antenna Gain(dBi):	2.27
Antenna Gain(dBd):	-0.15
Maximum Conducted Output Power (dBm)	<27.73

6.2.3 Test Method and Setup

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, Conducted maximum power shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the wireless communication tester CMU200 via the antenna connector. The band class is set as AWS.
- (b) Test the Conducted maximum output power by the CMU200.

Test setup

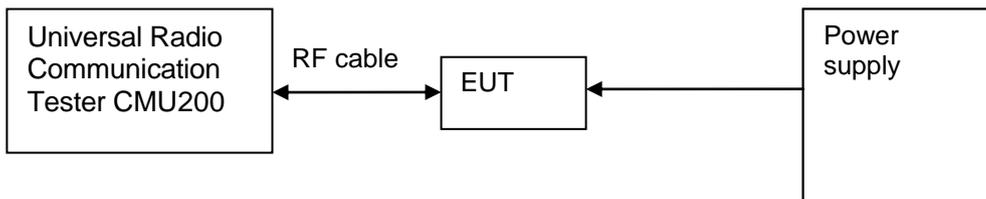


Figure 2. Test Set-up

6.2.4 Measurement Results

Table 18 Measurement Results

TEST CONDITIONS	RF Output Power (Conducted)					
	Channel 1312(B)		Channel 1412(M)		Channel 1513(T)	
	1712.4MHz		1732.4MHz		1752.6MHz	
	dBm		dBm		dBm	
Tnom (25 °C)/ Vnom (3.7V)	Measure d	Limit	Measured	Limit	Measure d	Limit
TM1	22.38	27.73	22.56	27.73	22.41	27.73

Note: Measurement the conducted output power with RMS detector.

6.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.3 Modulation Characteristics

6.3.1 Test Conditions

Table 19 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1 at frequency M

6.3.2 Test Specifications and Limits

6.3.2.1 Specification

CFR 47 (FCC) part 2.1047 and Part 27 Subpart C&L

6.3.2.2 Supporting Standards

Table 20 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.3.2.3 Limits

No specific modulation characteristics requirement limits in part 2.1047 and part 24 subpart E.

Table 21 Limits

Limits	Not applicable
--------	----------------

6.3.3 Test Method and Setup

Connect the EUT to Universal Radio Communication Tester CMU200 via the antenna connector. The frequency band is set as AWS; the EUT's output is matched with 50 Ω load, test method was according to 3GPP TS 34.121. The waveform quality and constellation of the EUT Module was tested.

Test setup

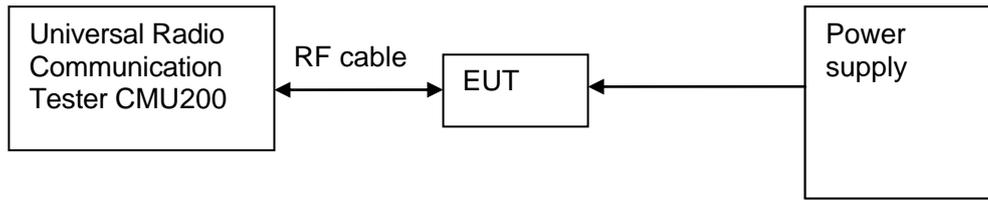


Figure 3. Test Set-up

6.3.4 Measurement Results

Table 22 Measurement Results

TEST CONDITIONS		Modulation Characteristic
		Channel 1412(M) 1732.4MHz
		Measured
		TM1
T_{nom} (25 °C)	V_{nom} (3.7V)	Refer to Appendix A

6.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix A.

6.4 Occupied Bandwidth

6.4.1 Test Conditions

Table 23 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1 at frequency B, M, T

6.4.2 Test Specifications and Limits

6.4.2.1 Specification

CFR 47 (FCC) part 2.1049 and Part 27

6.4.2.2 Supporting Standards

Table 24 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.4.2.3 Limits

No specific occupied bandwidth requirement in Part 27 Subpart C&L, but the occupied bandwidth was defined in part 2.1049: the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Table 25 Limits

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

6.4.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector. The band class is set as AWS; The EUT was controlled to transmit maximum power. Measure and record the occupied bandwidth of the EUT Module by the R&S FSQ31.

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

Refer to 47CFR part2.1049 section (g) & (h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

For TM1 following RBW and VBW are employed:

Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)

Video bandwidth (VBW): 500 kHz

Test Set-up

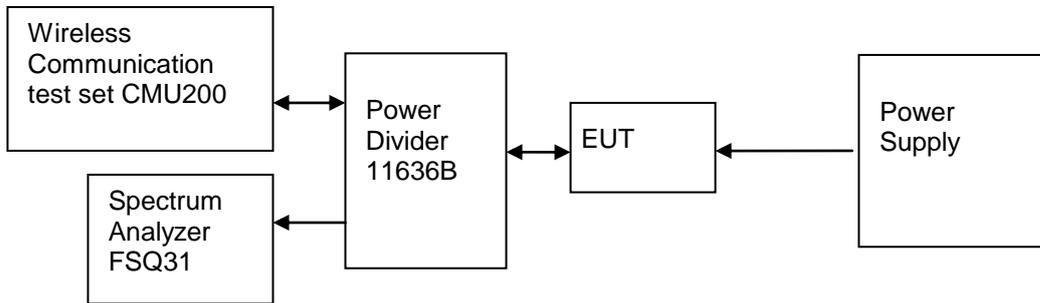


Figure 4. Test Set-up

6.4.4 Measurement Results

Table 26 Measurement Results

TEST CONDITIONS		Occupied Bandwidth		
		Channel 1312(B)	Channel 1412(M)	Channel 1513(T)
Center Frequency		1712.4MHz	1732.4MHz	1752.6MHz
		Measured (MHz)	Measured (MHz)	Measured (MHz)
		TM1	TM1	TM1
T _{nom} (25 °C) V _{nom} (3.7V)	99%	4.11	4.10	4.12

6.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.
 For the measurement results refer to appendix B.

6.5 Band Edges Compliance

6.5.1 Test Conditions

Table 27 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1 at frequency B, T

6.5.2 Test Specifications and Limits

6.5.2.1 Specification

CFR 47 (FCC) part 2.1051 and Part 27.53

6.5.2.2 Supporting Standards

Table 28 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.5.2.3 Limits

Compliance with Part 27.50(d) (2), all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$ (W). (Whereas P is the rated power of the EUT).

Table 29 Limits

	TM1
Rated Power:	24 dBm
Required attenuation:	$43 + 10 \log(0.25) = 37$, 24 dBm - 37 dB
Absolute level	- 13 dBm

6.5.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the band class is set as AWS. The EUT controlled to transmit maximum power. Measure and record band edges compliance of the EUT by the R&S FSQ31.

For TM1 following RBW and VBW are employed:

Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)

Video bandwidth (VBW): 200 kHz

Test Set-up

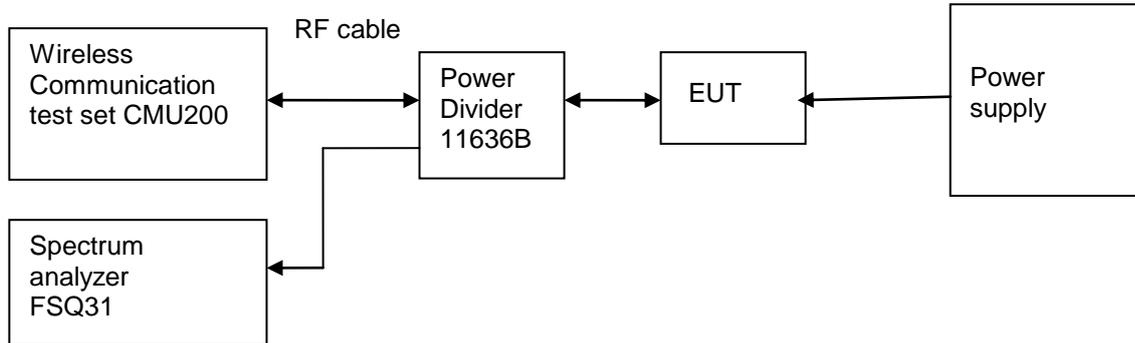


Figure 5. Test Set-up

6.5.4 Measurement Results

Table 30 Measurement Results outside Band Edges-- Single Carrier

Band	Frequency of Band edges [MHz]	Channel Number	Test Mode	Spurious Level measured [dBm]	FCC limit	Result
AWS	$T_{nom} (25\text{ }^{\circ}\text{C}), V_{nom} (3.7\text{V})$					
	1712.4	1312	TM1	<-13(See appendix C)	- 13 dBm	Pass
	1752.6	1513	TM1	<-13(See appendix C)	- 13 dBm	Pass

6.5.5 Conclusion

The equipment **PASSED** the requirement of this clause.
 For the measurement results refer to appendix C.

6.6 Spurious Emission at Antenna Terminal

6.6.1 Test Conditions

Table 31 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1 at frequency B, M, T

6.6.2 Test Specifications and Limits

6.6.2.1 Specification

CFR 47 (FCC) part 2.1051 and Part 27.53

6.6.2.2 Supporting Standards

Table 32 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.6.2.3 Limits

Compliance with Part 27.53, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Table 33 Limits

	TM1
Rated Power:	24 dBm
Required attenuation:	$43 + 10 \log(0.25) = 37$, 24 dBm - 37 dB
Absolute level	- 13 dBm

6.6.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the band class is set as AWS. The EUT was controlled to transmit maximum power. Measure and record the Conducted Spurious Emission of the EUT by the R&S FSQ31.

According to Part 27.53, the defined measurement bandwidth as following:

27.53 Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
 Measurement bandwidth (RBW) for 150 kHz up to 30MHz: 10 kHz;
 Measurement bandwidth (RBW) for 30 MHz up to 20GHz: 1MHz;

Test Set-up

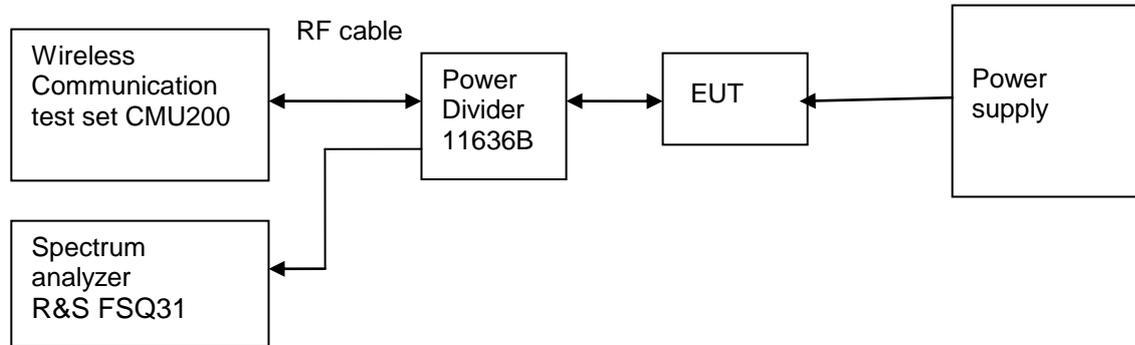


Figure 6. Test Set-up

6.6.4 Measurement Results

Table 34 Measurement Results

Channel Number	Test Mode	Test Range (Frequency)	Output Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel 1312(B)	TM1	9 kHz~20GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 1412(M)	TM1	9 kHz~20GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 1513(T)	TM1	9 kHz~20GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass

6.6.5 Conclusion

The equipment **PASSED** the requirement of this clause.
 For the measurement results refer to appendix D.

6.7 Field Strength of Spurious Emissions

6.7.1 Test Conditions

Table 35 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1 at frequency M

6.7.2 Test Specifications and Limits

6.7.2.1 Specification

CFR 47 (FCC) part 2.1053 and part 27.53(h)

6.7.2.2 Supporting Standards

Table 36 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.7.2.3 Limits

Compliance with part 27.53(h), all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Table 37 Limits

Rated Power:	24 dBm
Required attenuation:	$43 + 10 \log(0.25) = 37$, 24 dBm – 37 dB
Absolute level	- 13 dBm

6.7.3 Test Method and Setup

A test site fulfilling the requirements of ITU-R Recommendation SM329-11 was used. The EUT was placed on a non-conducting support in the anechoic chamber and was operated from a power source via an RF filter to avoid radiation from the power leads.

According to part 27.53, the defined measurement bandwidth as following:

27.53(h) Measurement procedure: Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;
Measurement bandwidth (RBW) for 30MHz up to 18GHz: 1MHz;

According to RSS-139, the defined measurement bandwidth as following:

RSS-139 Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.


Measurement bandwidth (RBW) for 30 MHz up to 18 GHz: 1 MHz;

Test Set-up

Step 1:


For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the BTS simulator via the air interface.

Test the Radiated maximum output power by the Test Receiver from test antenna.

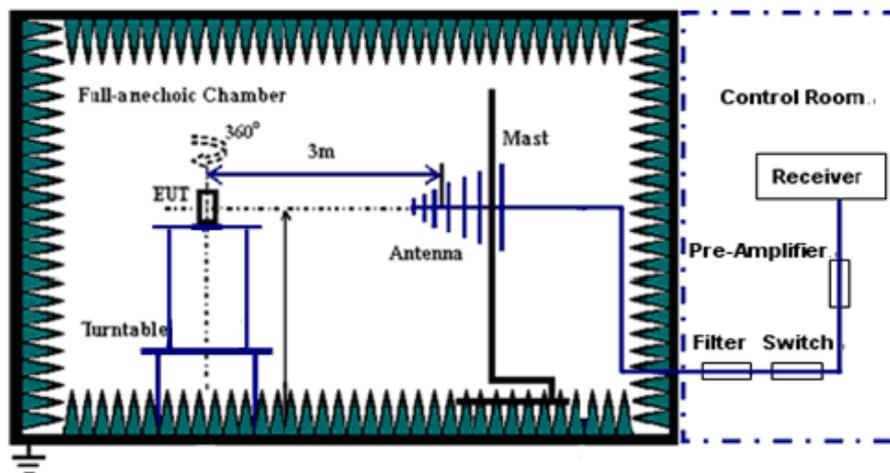

Step 2:

Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step1 on Test Receiver, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

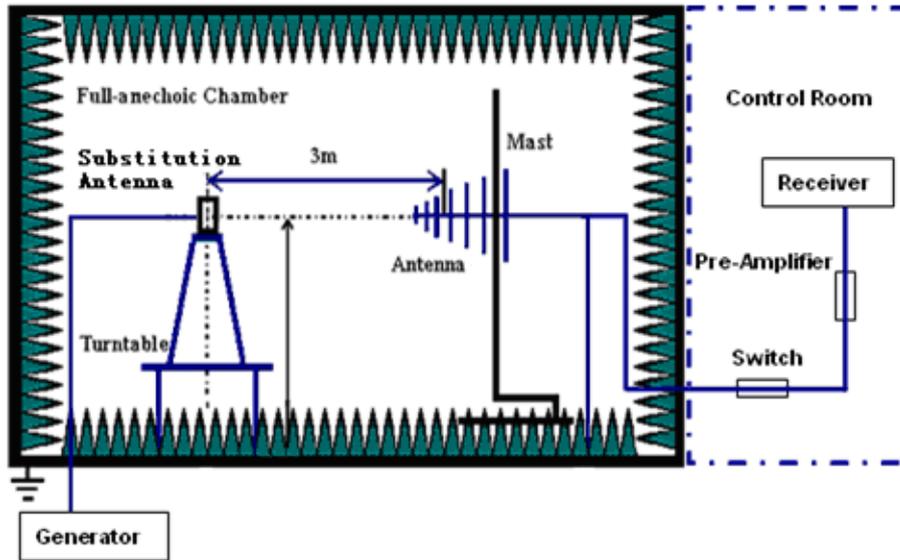

Test should be performed in normal voltage condition.

No peak found in pre- test. All frequency points' margin is bigger than 20dB, so the substitution method isn't used.

Calculation Sample:

Table 38 Substitution Results

Freq. [MHz]	Measurement Value [dBm]	Substitution Antenna Type	Gain [dBd]	Cable Loss [dB]	Signal Generator Level [dBm]	Substitution Level [dBm]	FCC limit [dBm]	Result

Note: For get the E.R.P. (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$E.R.P. [dBm] = SGP [dBm] - Cable Loss [dB] + Gain [dBd]$$

NOTE: SGP- Signal Generator Level

6.7.4 Conclusion

The equipment **PASSED** the requirement of this clause.
 For the measurement results refer to appendix_E

6.8 Receiver Spurious Emissions

6.8.1 Test Conditions

Table 39 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1 at frequency M

6.8.2 Test Specifications and Limits

6.8.2.1 Specification

IC RSS-Gen 4.10 and RSS-139 6.5

6.8.2.2 Supporting Standards

Table 40 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.8.2.3 Limits

Compliance with RSS-139 6.5, Receiver Spurious Emission must meet the requirement of following table.

Table 41 Test Limits

Frequency of Emission (MHz)	Radiated Limit		
	Unit($\mu\text{V}/\text{m}$)	Unit($\text{dB}\mu\text{V}/\text{m}$)	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	500	74	PK

6.8.3 Test Method and Setup

The EUT was connected to the Spectrum Analyzer or equivalent via one RF RX diversity connector, and other RF connectors were connected to match loads. The EUT was controlled to transmit maximum power and to be operated in the normal receive mode by Console Computer. Measure and record the Receiver Out-band Spurious Emissions of the EUT by the Spectrum Analyzer or equivalent.

According to IC RSS-Gen clause 4.10, the search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is the higher, to at least 3 times the highest tuneable or local oscillator frequency, whichever is the higher, without exceeding 40 GHz.

A preliminary scan and a final scan of the emissions were made from 30 MHz to 18 GHz by using test script of software; the emissions were measured using Quasi-Peak Detector (30MHz~1GHz), Peak Detector and AV detector (above 1GHz). The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°, The receive antenna has two polarizations V and H.

EUT was configured in idle mode and the test performed at worst emission state.

Measurement bandwidth: 30 MHz – 1000 MHz: 120 kHz

Measurement bandwidth: 1GHz – 18GHz: 1MHz

Test set up figure:

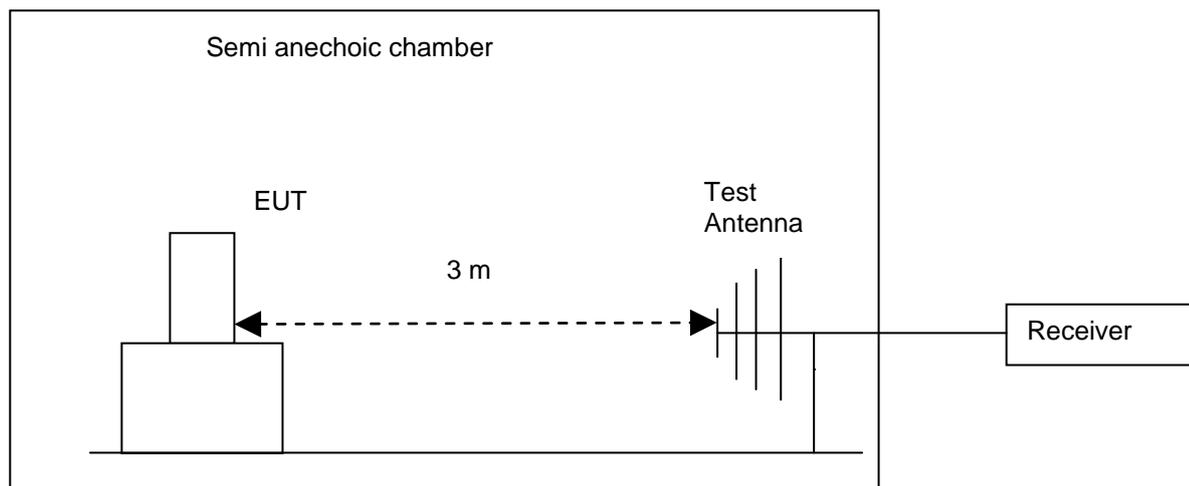


Figure 1. Test set-up

The EUT has met the requirements for Radiated Emission of enclosure port.

6.8.4 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix F.

6.9 Frequency Stability

6.9.1 Test Conditions

Table 42 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	See below
Relative humidity:	55 %
Test Configurations:	TM1 at frequency M

6.9.2 Test Specifications and Limits

6.9.2.1 Specification

CFR 47 (FCC) part 2.1055 and Part 27.54

6.9.2.2 Supporting Standards

Table 43 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.9.2.3 Limits

No specific frequency stability requirement in part 2.1055 and Part 27.50(d)(2).

6.9.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30 ° to +50 ° centigrade for all equipment except that specified in subparagraphs
- (2) and (3) of paragraph 2.1055

(a) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(b) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery

operating end point, which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

(c) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

Test Set up

Connect the EUT to the Wireless Communication test set CMU200 via the connector. Then measure the frequency error by the Wireless Communication test set CMU200. The EUT's output is matched with a 50 Ω load.

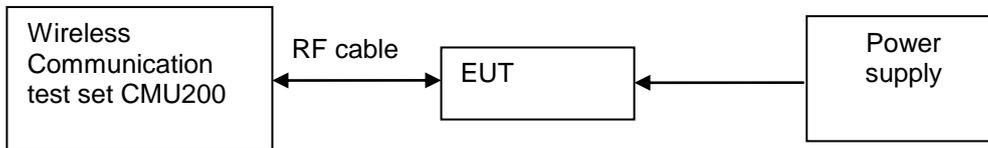


Figure 7. Test Set up

6.9.4 Measurement Results

6.9.4.1 Measurement Results vs. Variation of Temperature

- **TM1, 3.7V DC Channel No.1412(1732.4MHz)**

Table 44 Measurement Results vs. Variation of Temperature – TM1

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-10 °C	1732.4	-15	Pass
0 °C	1732.4	-6	Pass
+10 °C	1732.4	18	Pass
+20 °C	1732.4	9	Pass
+30 °C	1732.4	-13	Pass
+40 °C	1732.4	-10	Pass
+50 °C	1732.4	7	Pass
+55 °C	1732.4	10	Pass



6.9.4.2 Measurement Results vs. Variation of Voltage

- **TM1, 25 °C ,Channel No. 1412(1732.4MHz)**

Table 45 Measurement Results vs. Variation of Voltage – TM1

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+4.2V	1732.4	9	Pass
+3.7V	1732.4	-18	Pass
+3.3 V	1732.4	-16	Pass

6.9.5 Conclusion

The equipment **PASSED** the requirement of this clause.

7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Table 46 System Measurement Uncertainty

Items		Extended Uncertainty
Effective Radiated Power of Transmitter	EIRP (dBm)	U=3dB; k=2
Band Width	Magnitude (%)	U=0.2%; k=2
Band Edge Compliance	Disturbance Power (dBm)	U=2.0dB; k=2
Conducted Spurious Emission at Antenna Terminal	Disturbance Power (dBm)	U=2.0dB; k=2
Frequency Stability	Frequency Accuracy(ppm)	U=0.21ppm; k=2



8 Appendices

Appendix A	Measurement Results Modulation Characteristics
Appendix B	Measurement Results Occupied Bandwidth
Appendix C	Measurement Results Band Edges
Appendix D	Measurement Results Spurious Emission at Antenna Terminal
Appendix E	Measurement Results Field Strength of Spurious Emissions
Appendix F	Measurement Results Receiver Spurious Emissions
Appendix G	Photos of Test Setup



FCC&IC Test Report of U2801-34
FCC ID: QISU2801-34
IC ID: 6369A-U280134




Appendix A

Modulation Characteristics

According to FCC Part 2.1047 & Part 27 Subpart C&L
&RSS-139



TM1: WCDMA Channel 1412

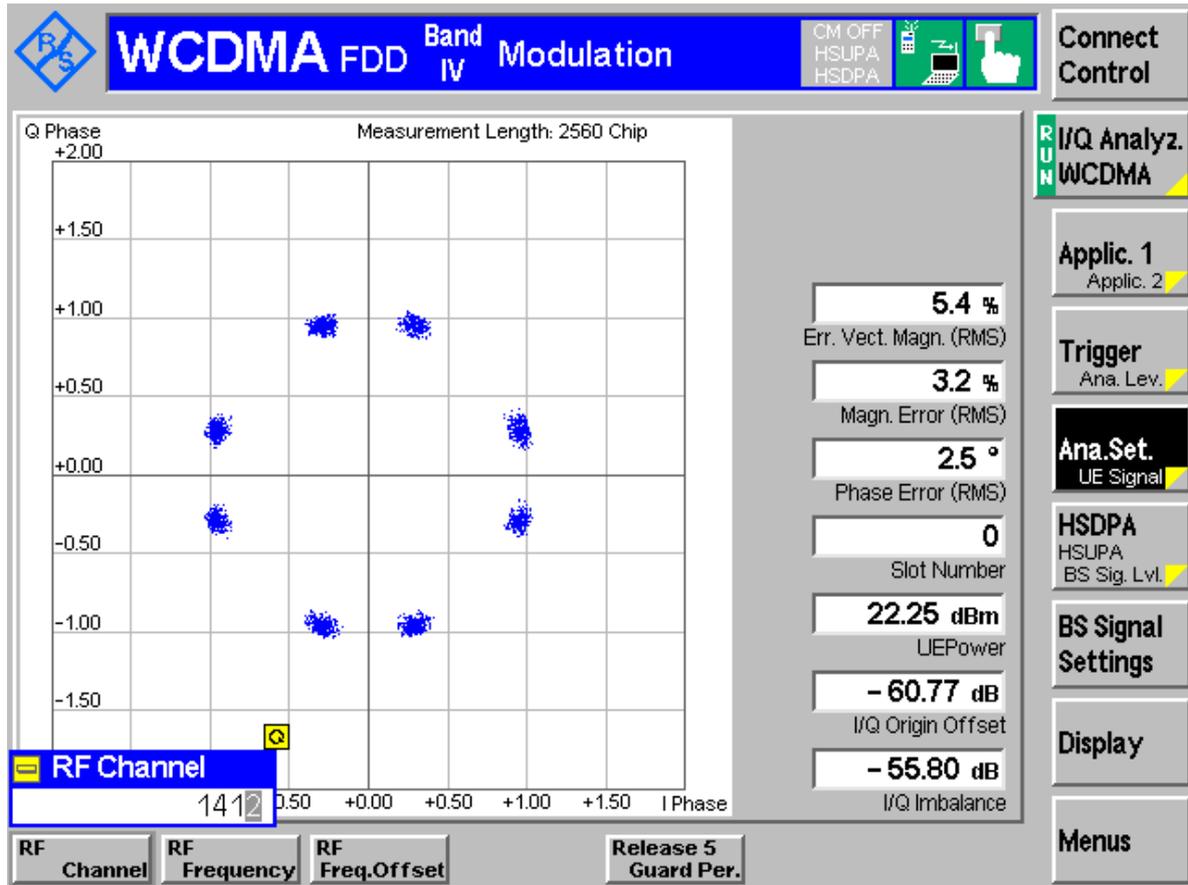



FCC&IC Test Report of U2801-34
FCC ID: QISU2801-34
IC ID: 6369A-U280134



Appendix B

Occupied Bandwidth


According to FCC Part 2.1049 & Part 27 Subpart C&L
&RSS-139



Channel 1412



*RBW 50 kHz Marker 1 [T1] 15.22 dBm
 *VBW 500 kHz
 Ref 35 dBm Att 35 dB SWT 5 ms 1.733008974 GHz

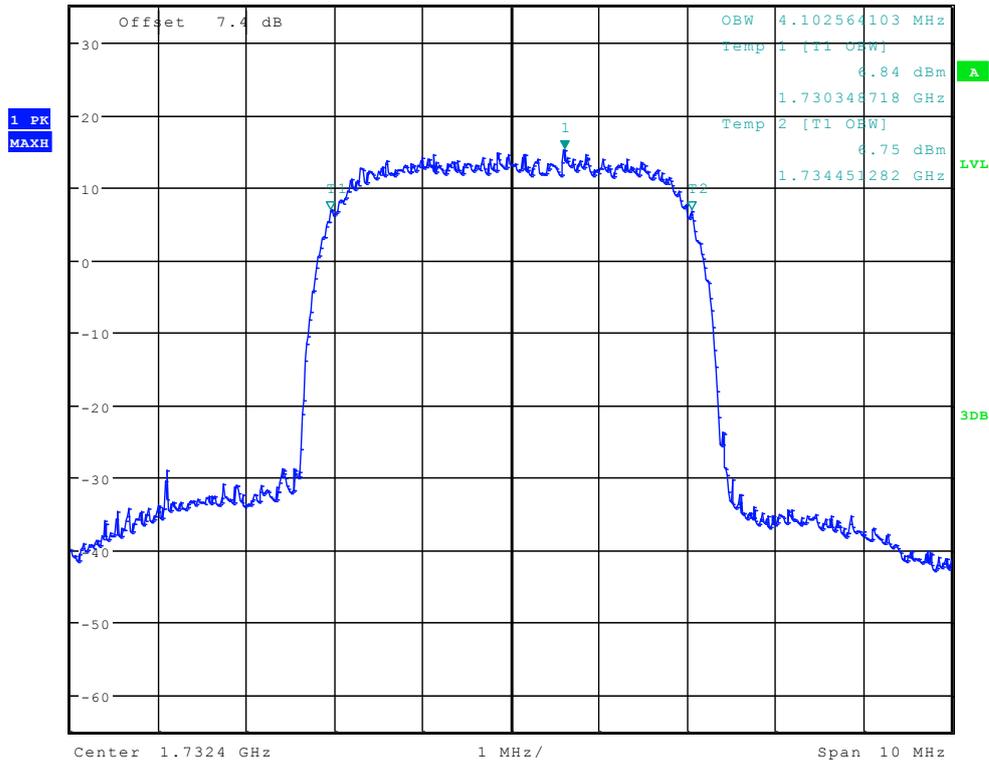


Date: 29.AUG.2011 12:43:22



Channel 1513



Ref 35 dBm Att 35 dB RBW 50 kHz Marker 1 [T1] 15.00 dBm
 VBW 500 kHz SWT 5 ms 1.753192949 GHz

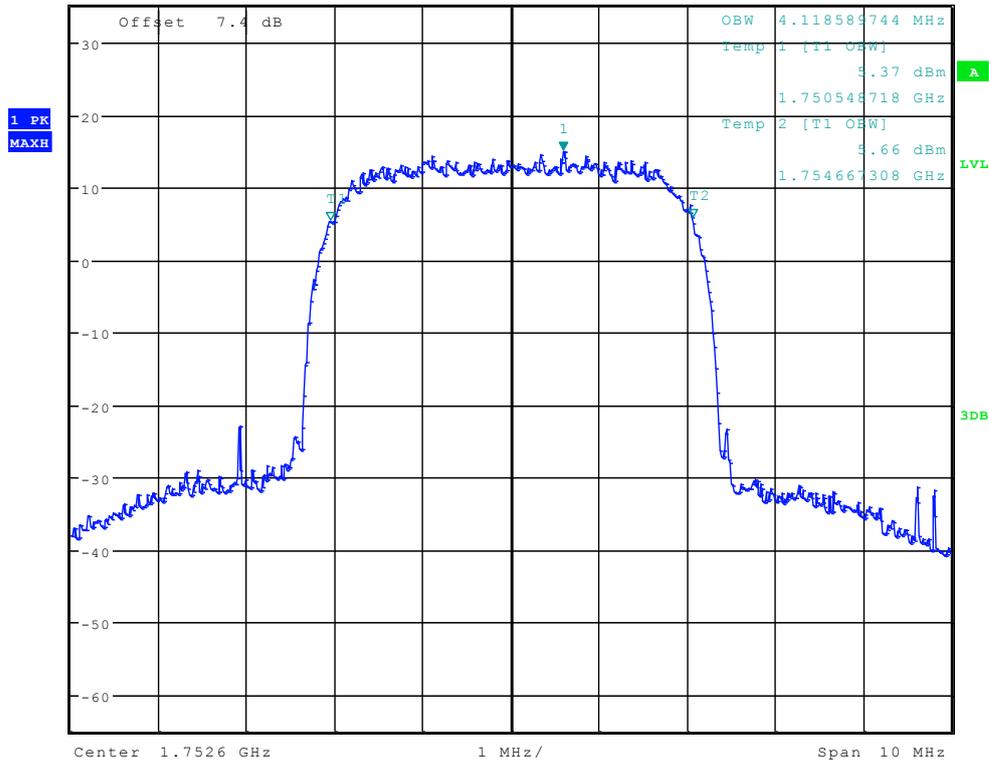

Date: 29.AUG.2011 12:43:36



FCC&IC Test Report of U2801-34
FCC ID: QISU2801-34
IC ID: 6369A-U280134



Appendix C

Band Edges Compliance


According to FCC Part 2.1051 & Part 27 Subpart C&L
&RSS-139



TM1: WCDMA

Left Edge

Channel 1312

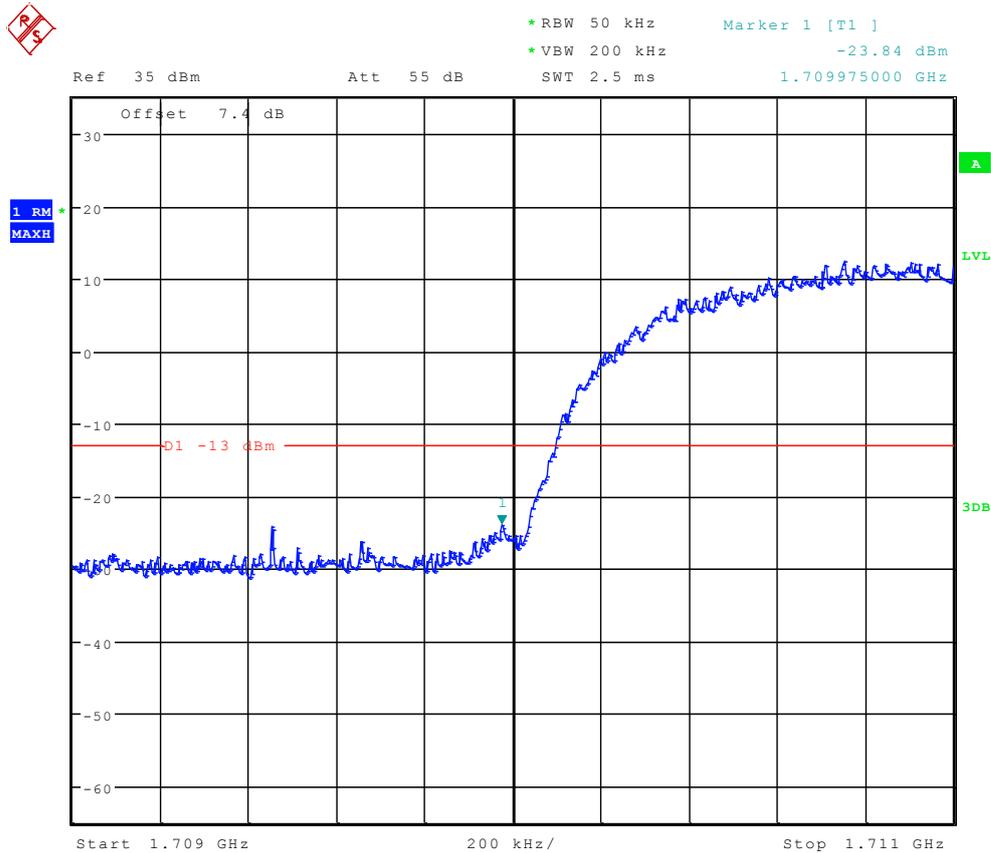


Date: 29.AUG.2011 12:43:50

Right Edge



Channel 1513

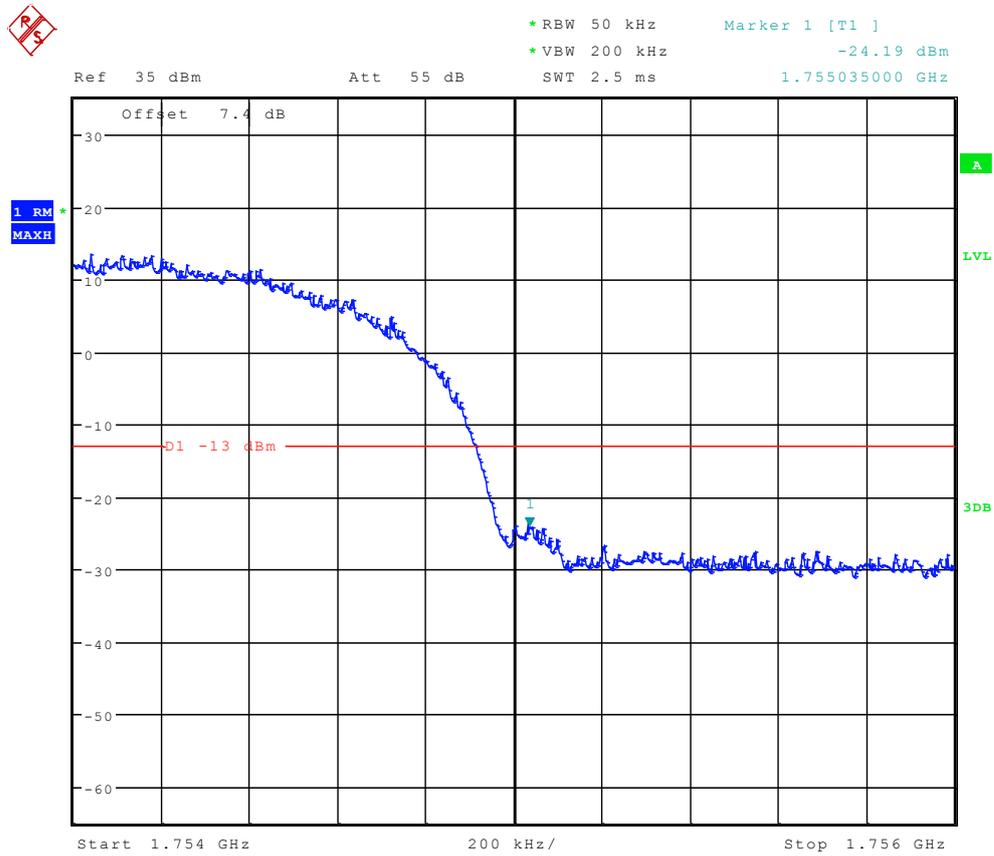

Date: 29.AUG.2011 12:44:04



FCC&IC Test Report of U2801-34
FCC ID: QISU2801-34
IC ID: 6369A-U280134



Appendix D


Spurious Emission at Antenna Terminal

According to FCC Part 2.1051 & Part 27 Subpart C&L
&RSS-139




TM1: WCDMA

Channel 1312

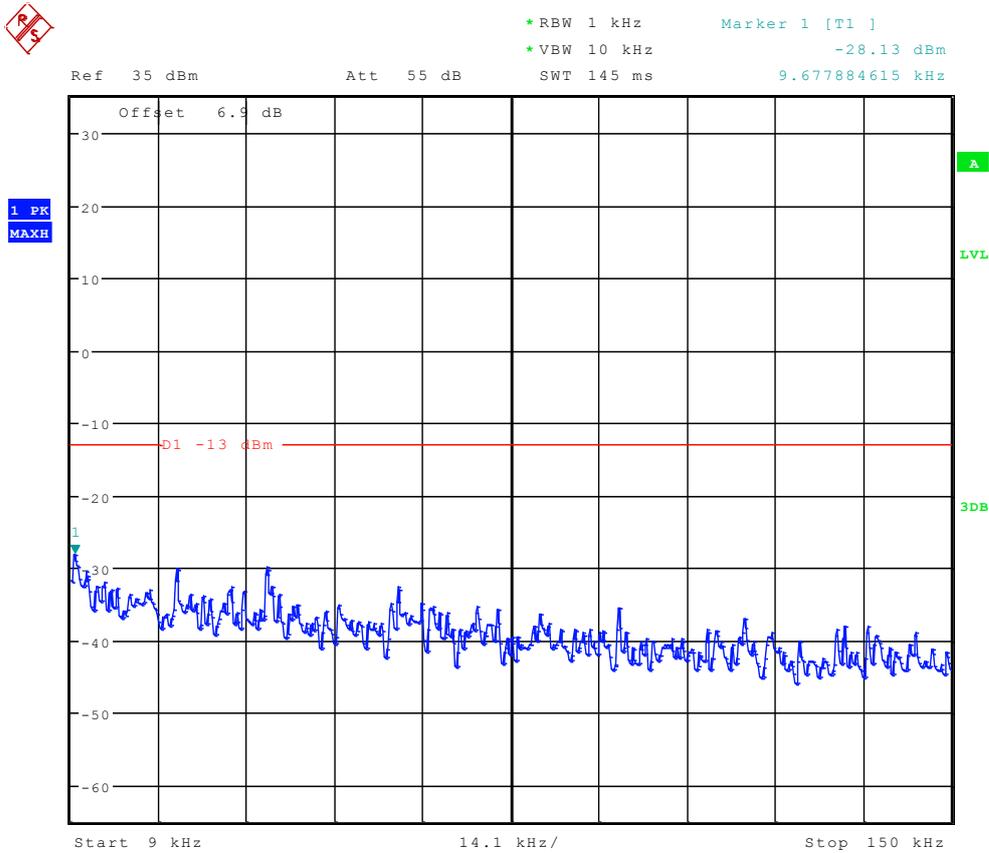


Date: 29.AUG.2011 12:44:18

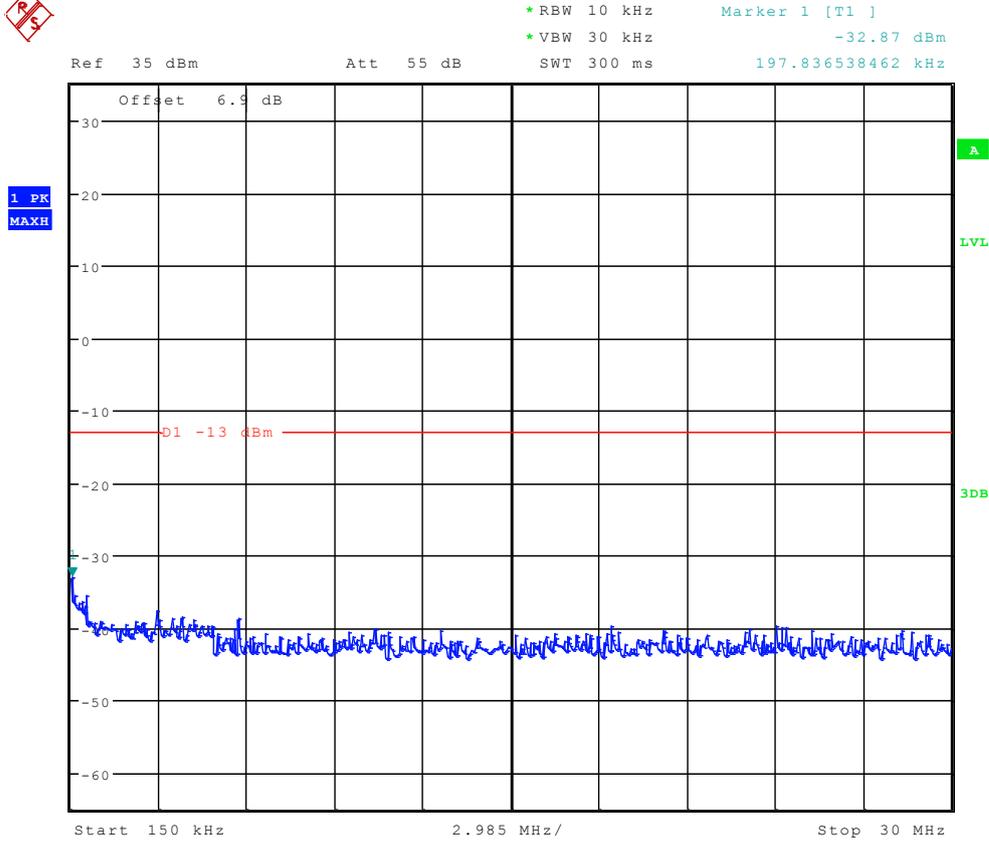

Date: 29.AUG.2011 12:45:02



Ref 35 dBm Att 55 dB SWT 115 ms Marker 1 [T1]
*RBW 1 MHz 22.58 dBm
*VBW 3 MHz 1.694166667 GHz

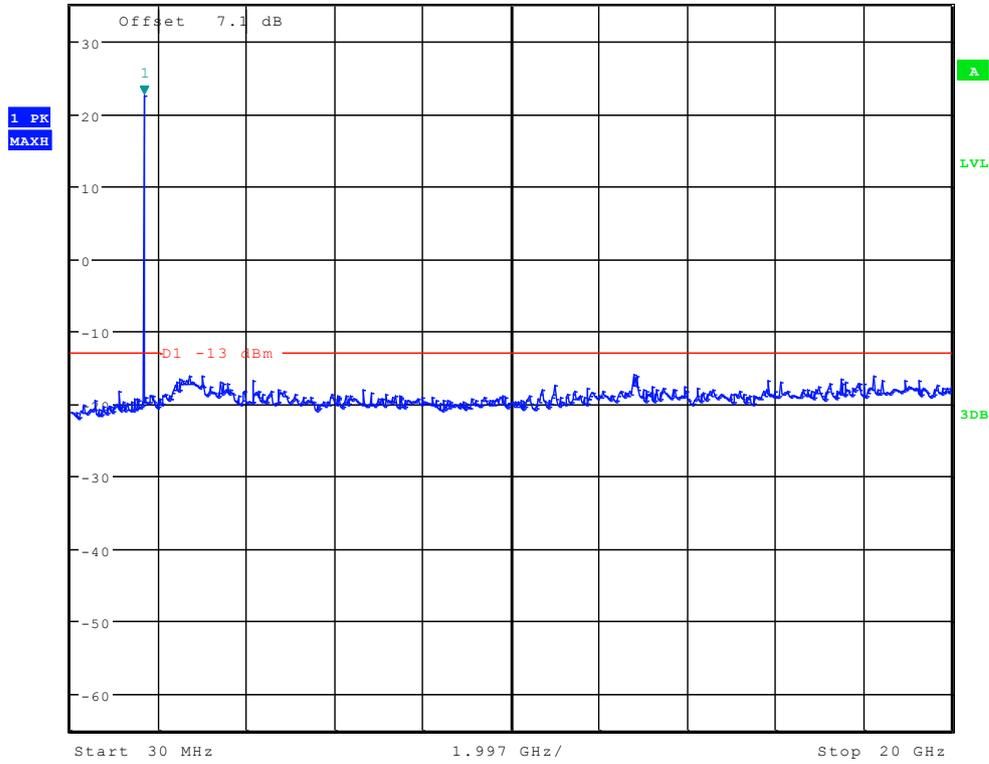


Date: 29.AUG.2011 12:45:46



Channel 1412




Ref 35 dBm Att 55 dB RBW 1 kHz Marker 1 [T1] -36.06 dBm
*VBW 10 kHz SWT 145 ms 10.807692308 kHz

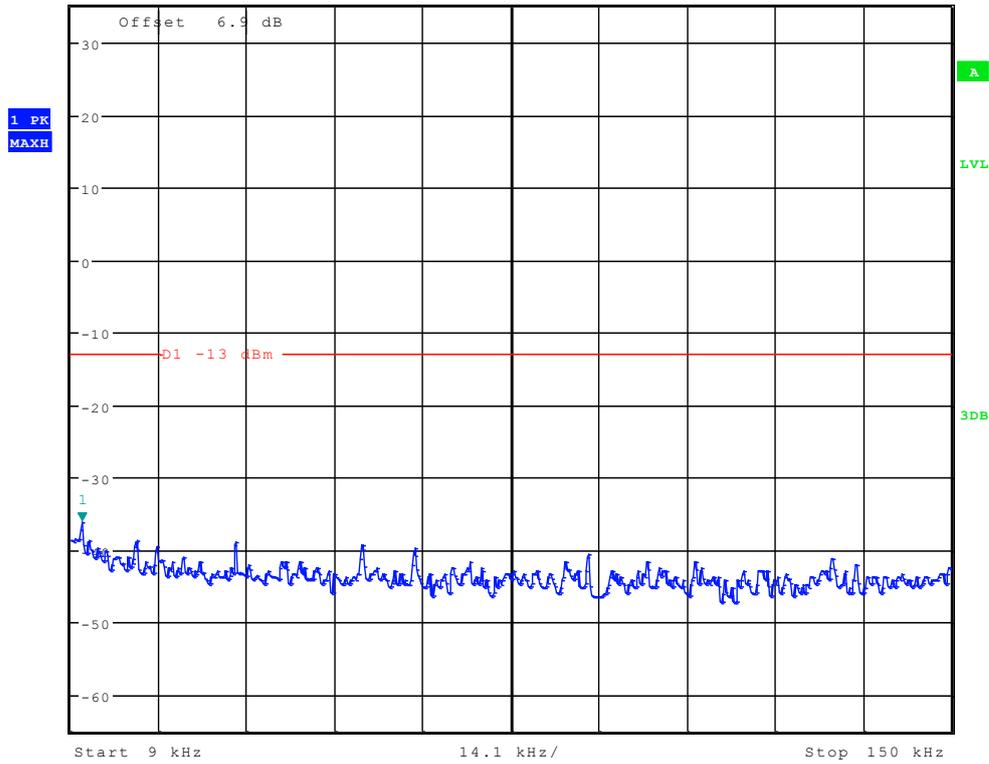

Date: 29.AUG.2011 12:44:33




Ref 35 dBm Att 55 dB SWT 300 ms
*RBW 10 kHz Marker 1 [T1] -33.16 dBm
*VBW 30 kHz 150.00000000 kHz

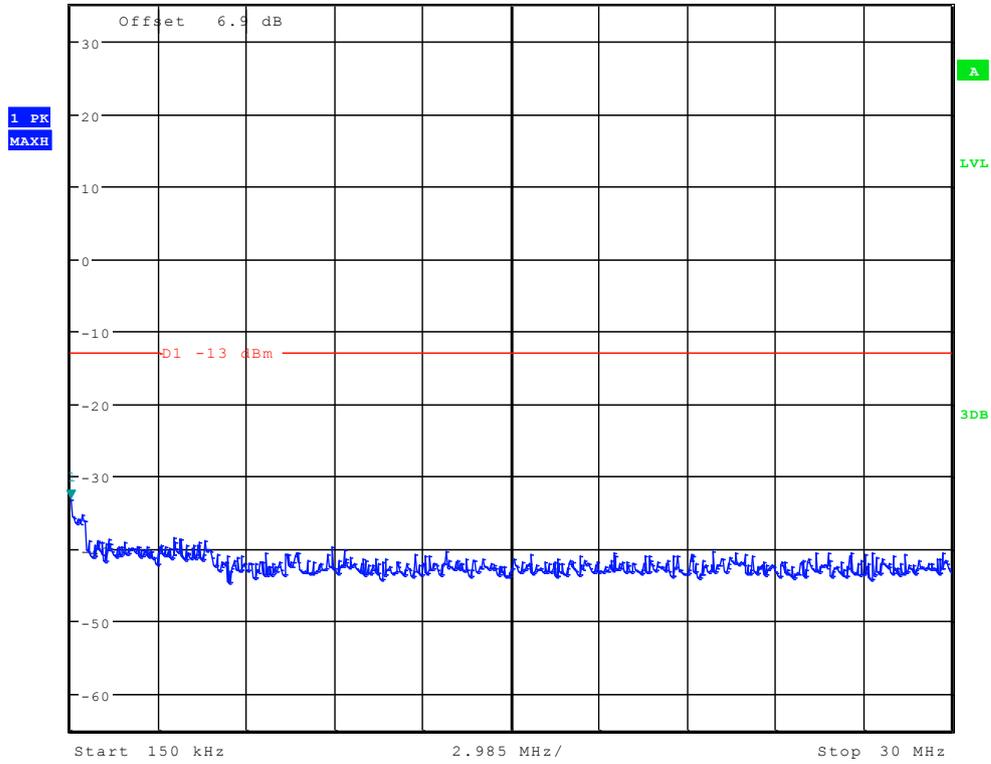

Date: 29.AUG.2011 12:45:16




Ref 35 dBm Att 55 dB SWT 115 ms Marker 1 [T1]
*RBW 1 MHz *VBW 3 MHz 22.47 dBm
1.726169872 GHz

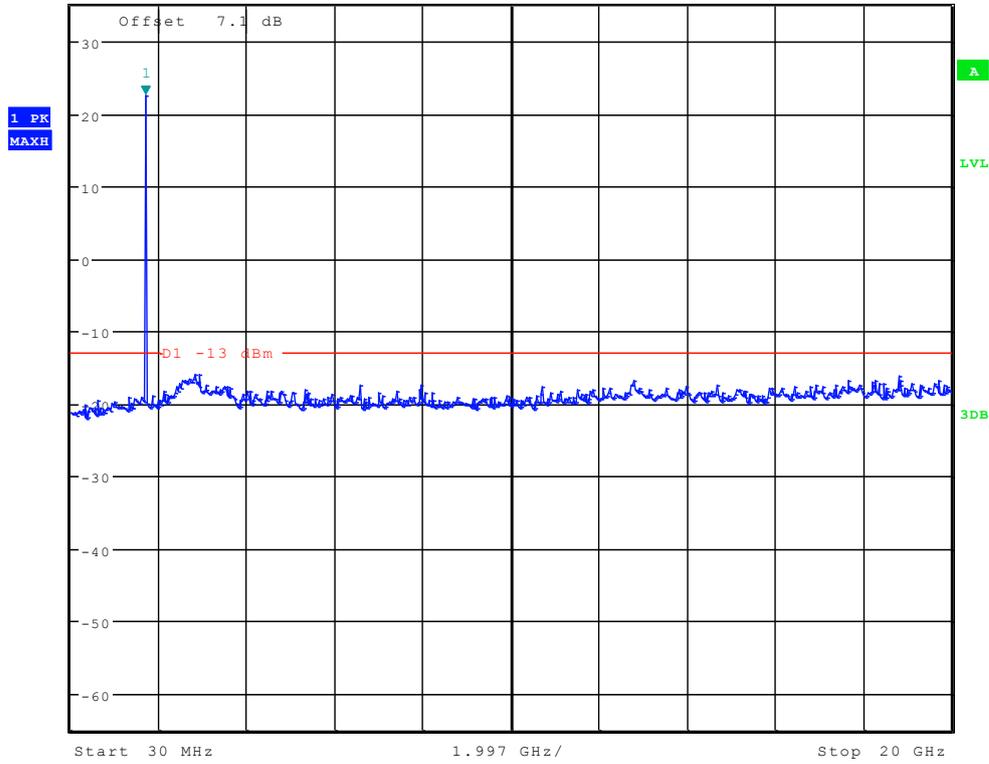

Date: 29.AUG.2011 12:46:00




Channel 1513

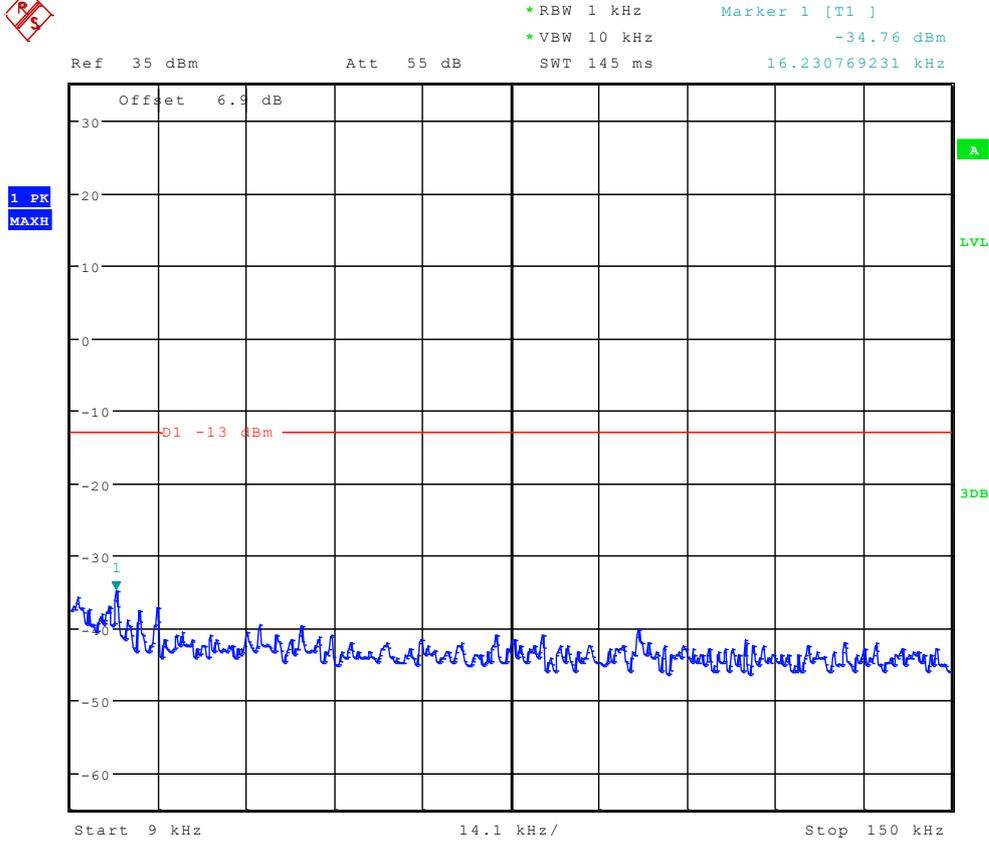


Date: 29.AUG.2011 12:44:47



Ref 35 dBm Att 55 dB SWT 300 ms Marker 1 [T1] -31.95 dBm
*RBW 10 kHz
*VBW 30 kHz
197.836538462 kHz

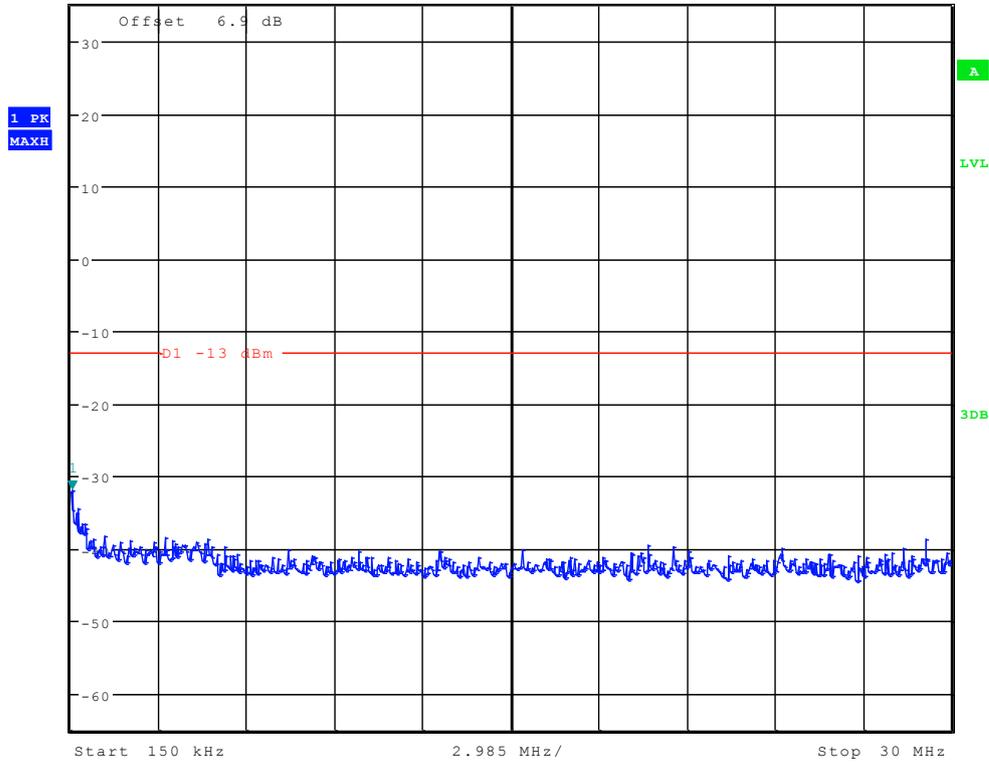

Date: 29.AUG.2011 12:45:31

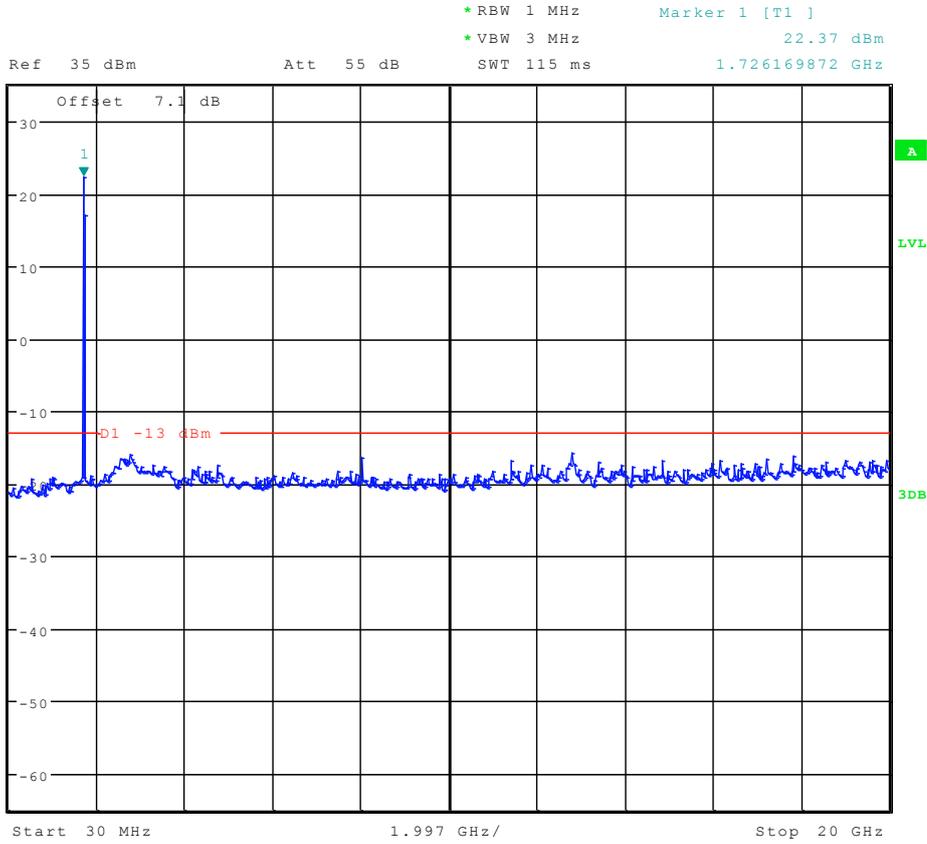

Date: 29.AUG.2011 12:46:15



Appendix E


Field Strength of Spurious Emissions

According to FCC Part 2.1053 & Part 27 Subpart C&L
&RSS-139




WCDMA AWS

(9kHz~30MHz)

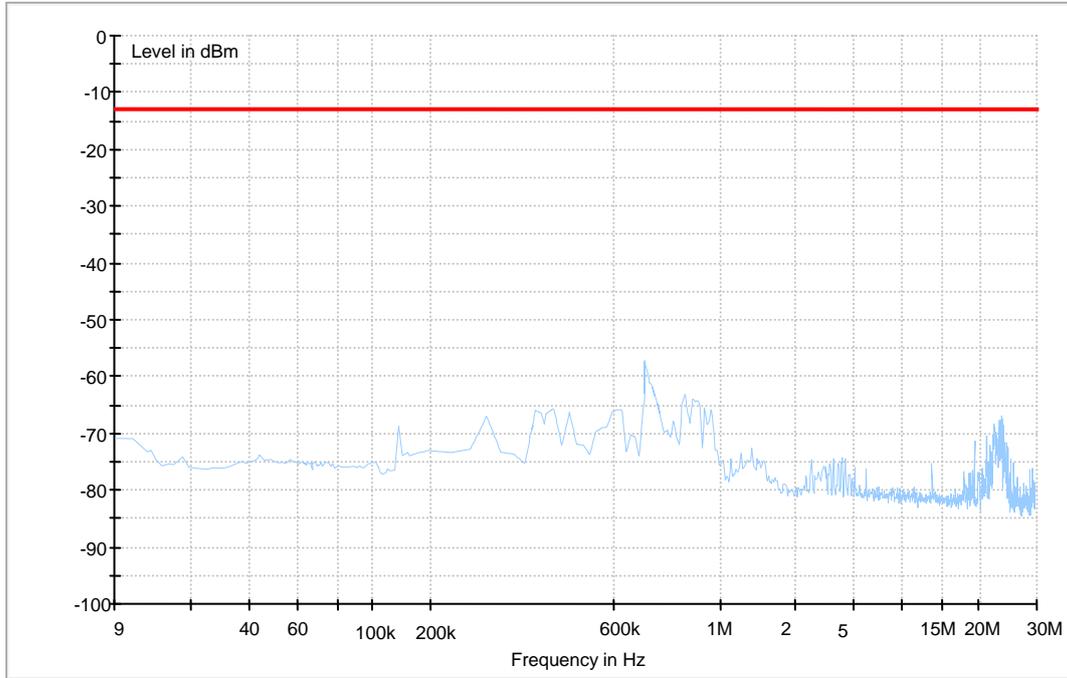




(30MHz~3GHz)

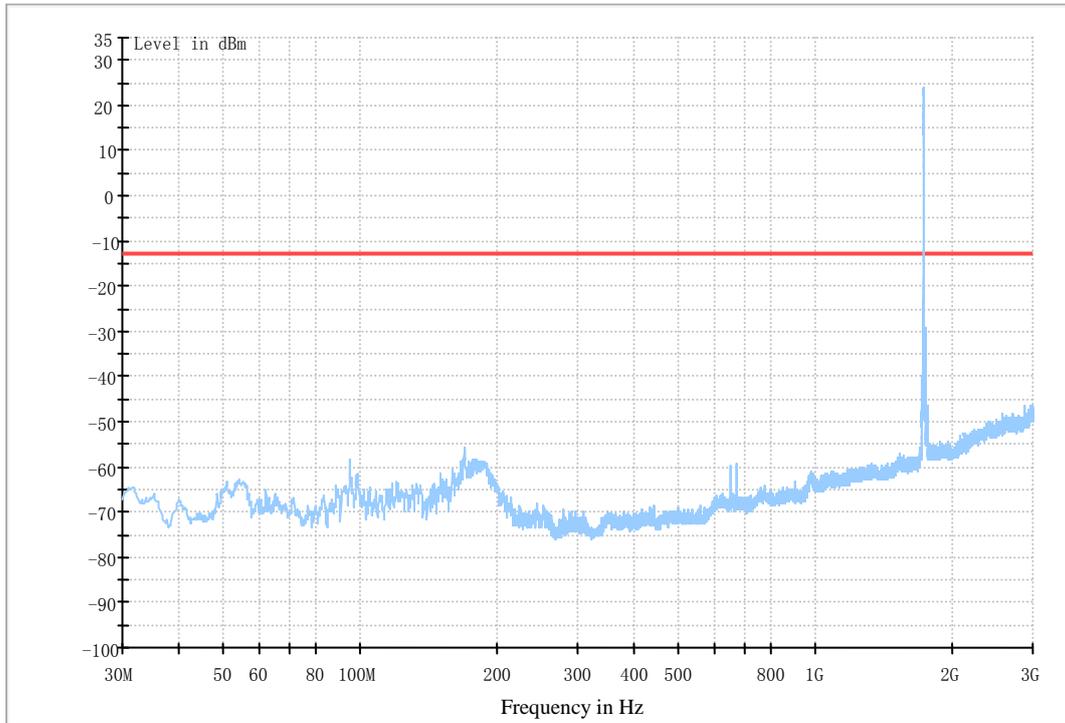



(3GHz~18GHz)

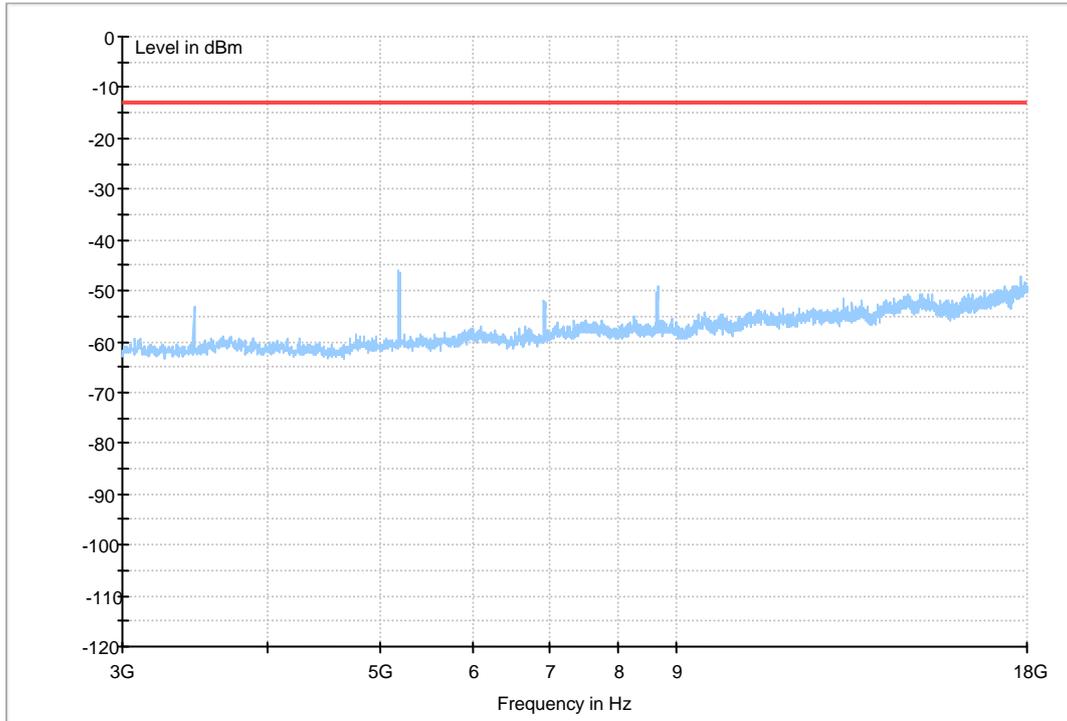



FCC&IC Test Report of U2801-34
FCC ID: QISU2801-34
IC ID: 6369A-U280134



Appendix F


Receiver Spurious Emissions

According to RSS-139



This test was carried out in all the test modes, Here only the worst test result was shown.

30MHz-1GHz

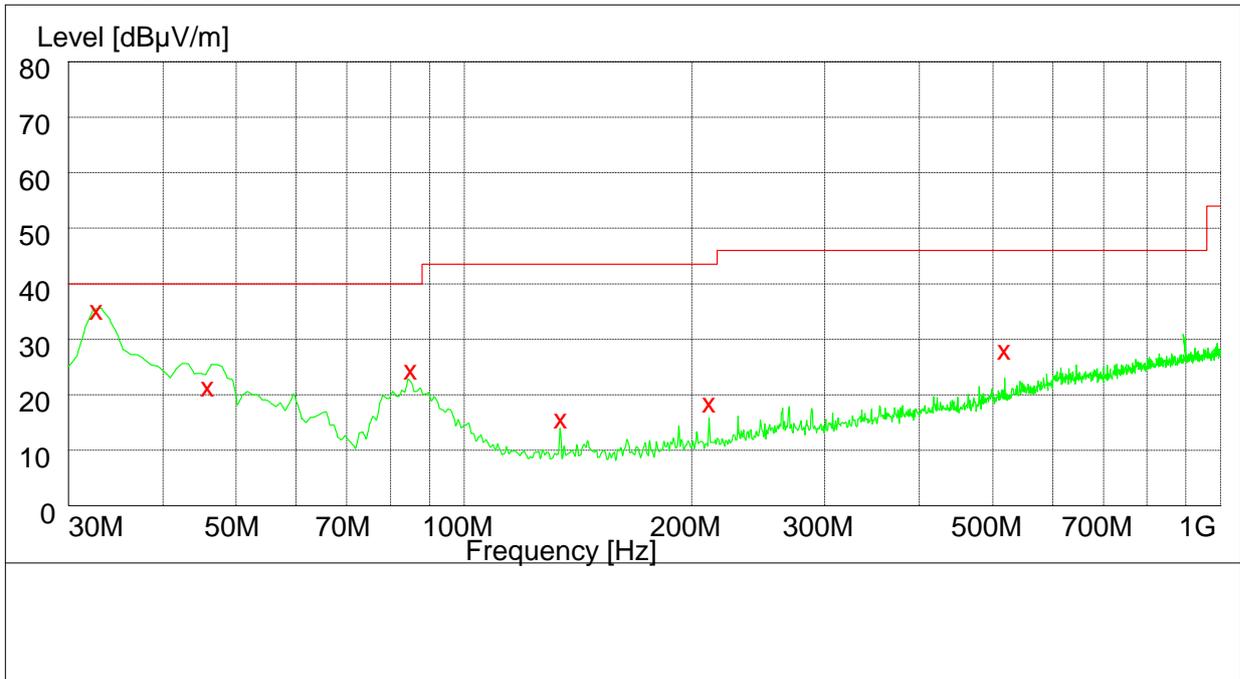


MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV/m	Trans d dB	Limit dBµV/m	Margin dB	Heig ht cm	Azimu t h deg	Polarisation
32.744000	35.50	11.7	40.0	4.5	117.0	197.00	VERTICAL
45.936000	21.50	13.0	40.0	18.5	100.0	15.00	VERTICAL
85.160000	24.60	10.2	40.0	15.4	167.0	53.00	VERTICAL
134.404000	16.20	9.0	43.5	27.3	100.0	327.00	VERTICAL
211.228000	19.10	12.6	43.5	24.4	100.0	213.00	VERTICAL
518.400000	28.50	20.6	46.0	17.5	100.0	313.00	HORIZONTAL



1GHz-18GHz

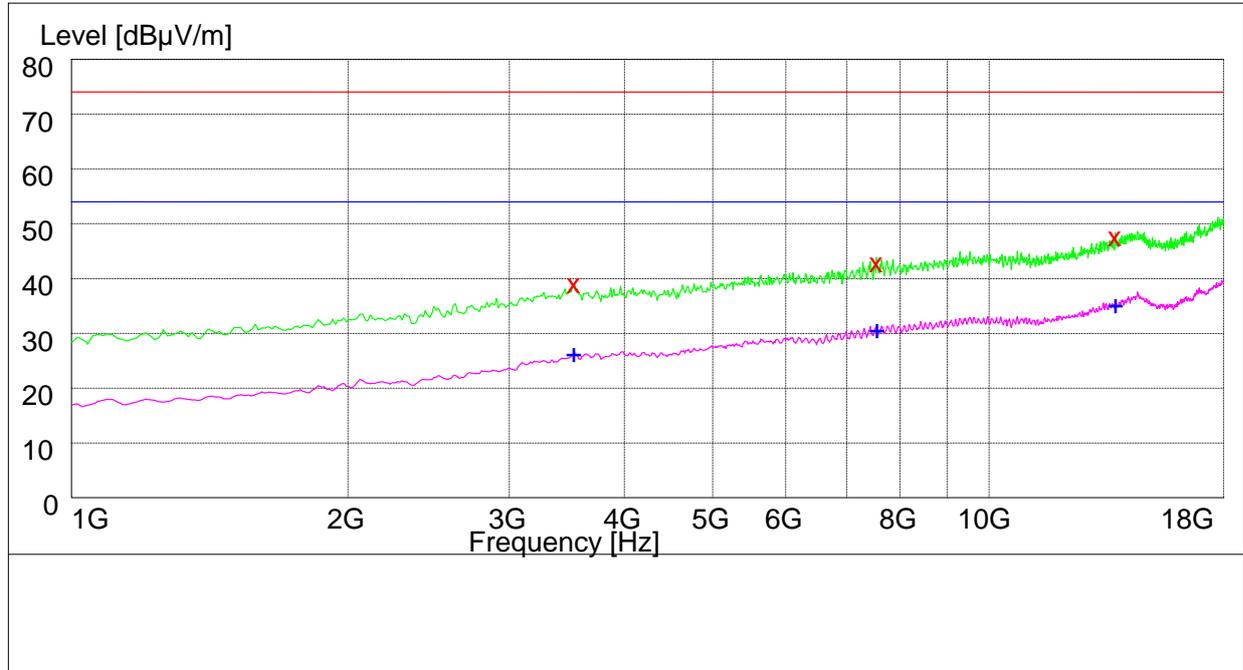

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Trans d dB	Limit dBµV/m	Margin dB	Heig ht cm	Azimet h deg	Polarisation
3532.000000	39.60	-5.2	74.0	34.4	182.0	324.00	VERTICAL
7537.000000	42.60	2.4	74.0	31.4	152.0	288.00	VERTICAL
13720.000000	47.30	12.6	74.0	26.7	151.0	207.00	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV/m	Trans d dB	Limit dBµV/m	Margin dB	Heig ht cm	Azimet h deg	Polarisation
3526.000000	26.00	-5.2	54.0	28.0	100.0	123.00	HORIZONTAL
7534.500000	30.40	2.5	54.0	23.6	200.0	98.00	VERTICAL
13722.500000	34.60	12.6	54.0	19.4	142.0	333.00	VERTICAL