



Appendix A. System Check Plots

Table of contents
SystemPerformanceCheck-D835-EX-Head
SystemPerformanceCheck-D835-EX-Body
SystemPerformanceCheck-D1900-EX-Head
SystemPerformanceCheck-D1900-EX-Body

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D835-EX-Head

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d126

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 42.62$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.46, 9.46, 9.46); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/d=15mm,pin=250mW/Area Scan (6x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 2.56 mW/g


Configuration/d=15mm,pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 53.589 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.485 mW/g

SAR(1 g) = 2.34 mW/g; SAR(10 g) = 1.53 mW/g

Maximum value of SAR (measured) = 2.52 mW/g

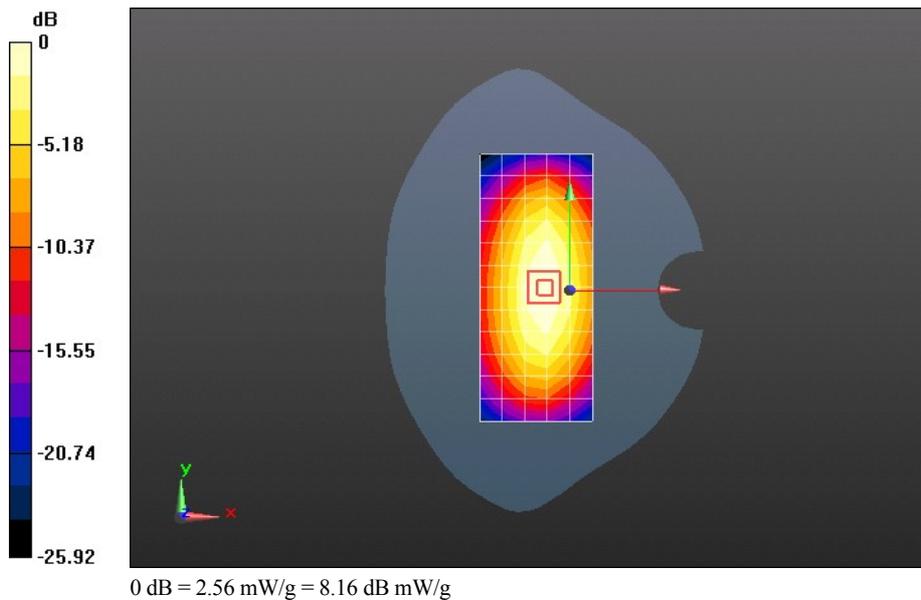

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D835-EX-Body

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d126

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 53.157$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/d=15mm,pin=250mW/Area Scan (6x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 2.75 mW/g


Configuration/d=15mm,pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 53.086 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.723 mW/g

SAR(1 g) = 2.52 mW/g; SAR(10 g) = 1.65 mW/g

Maximum value of SAR (measured) = 2.72 mW/g

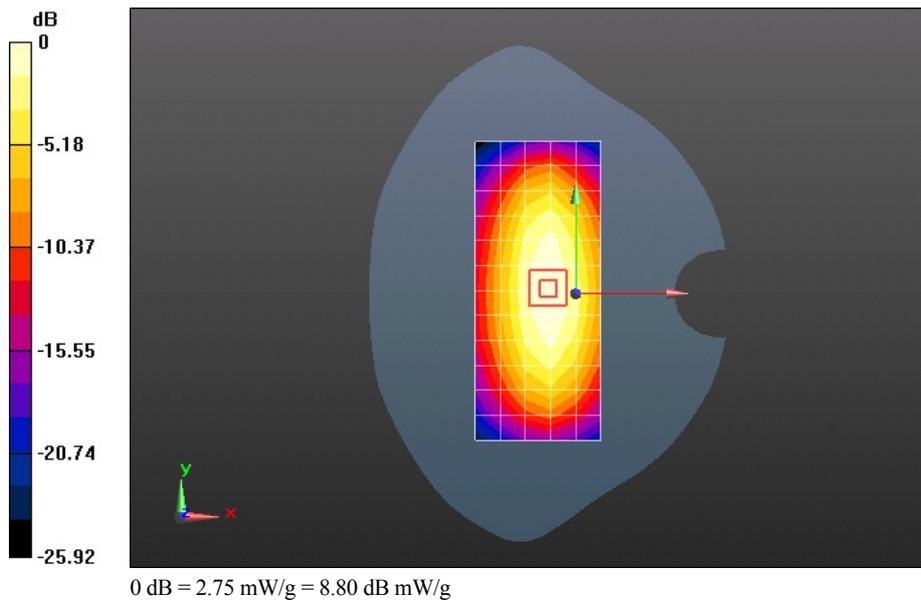

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D1900-EX-Head

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d143

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.418$ mho/m; $\epsilon_r = 39.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(8.33, 8.33, 8.33); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/d=10mm, Pin=250mW/Area Scan (7x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 9.50 mW/g


Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 83.520 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 18.053 mW/g

SAR(1 g) = 9.6 mW/g; SAR(10 g) = 4.91 mW/g

Maximum value of SAR (measured) = 10.6 mW/g

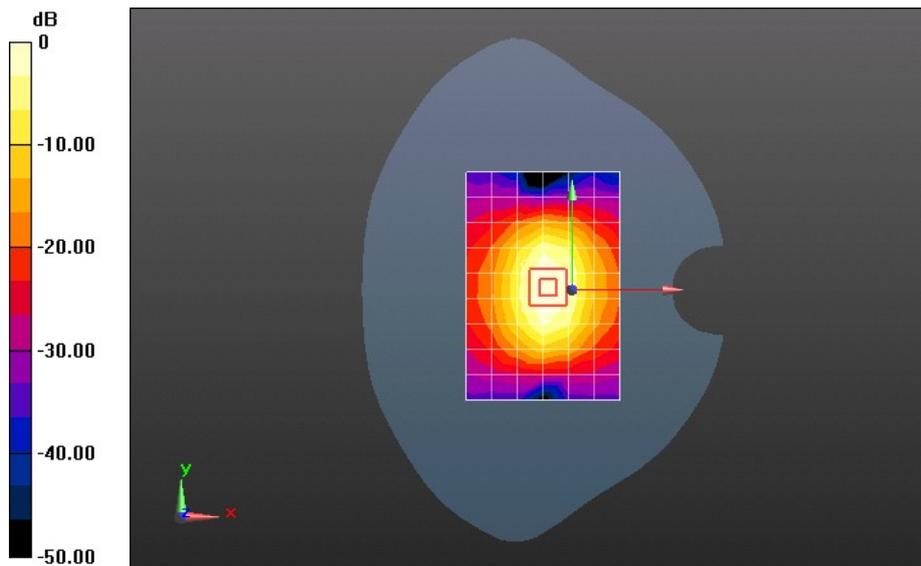

0 dB = 9.50 mW/g = 19.56 dB mW/g

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D1900-EX-Body

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d143

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.564$ mho/m; $\epsilon_r = 53.065$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.89, 7.89, 7.89); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/d=10mm, Pin=250mW/Area Scan (7x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 10.4 mW/g


Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 84.548 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 19.211 mW/g

SAR(1 g) = 9.86 mW/g; SAR(10 g) = 4.97 mW/g

Maximum value of SAR (measured) = 11.2 mW/g

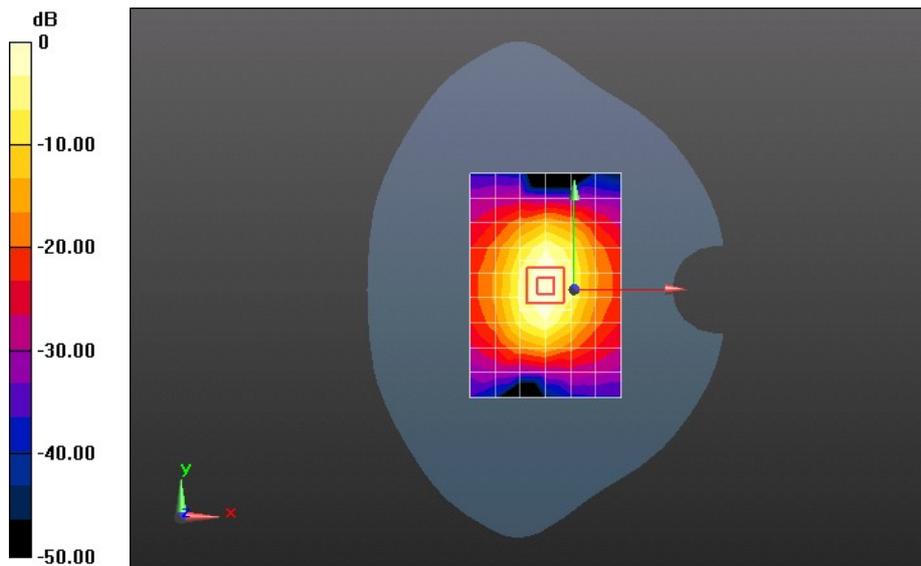

0 dB = 10.4 mW/g = 20.36 dB mW/g