



FCC SAR Compliance Test Report

Project Name: UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth

Model : HUAWEI U2805-5

FCC ID : QISU2805-5

Report No. : SYBH(Z-SAR)023042013-2

	APPROVED (Manager)	CHECKED	PREPARED
BY	<i>Liu Chunlin</i>	<i>Alwinway</i>	<i>Qin Guohui</i>
DATE	2013-06-24	2013-06-24	2013-06-24

The test results of this test report relate exclusively to the item(s) tested , The HUAWEI does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of HUAWEI.

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

Table of Contents

1	General Information	4
1.1	Statement of Compliance	4
1.2	RF exposure limits	4
1.3	EUT Description	5
1.3.1	General Description	6
1.4	Test specification(s)	7
1.5	Testing laboratory	7
1.6	Applicant and Manufacturer	7
1.7	Application details	7
1.8	Ambient Condition	7
2	SAR Measurement System	8
2.1	SAR Measurement Set-up	8
2.2	Test environment	9
2.3	Data Acquisition Electronics description	9
2.4	Probe description	10
2.5	Phantom description	11
2.6	Device holder description	11
2.7	Test Equipment List	12
3	SAR Measurement Procedure	13
3.1	Scanning procedure	13
3.2	Spatial Peak SAR Evaluation	14
3.3	Data Storage and Evaluation	15
4	System Verification Procedure	17
4.1	Tissue Verification	17
4.2	System Check	18
4.3	System check Procedure	19
5	Measurement Uncertainty Evaluation	20
5.1	Measurement uncertainty evaluation for SAR test	20
5.2	Measurement uncertainty evaluation for system check	21
6	SAR Test Configuration	22
6.1	GSM Test Configuration	22
6.2	UMTS Test Configuration	23
7	SAR Measurement Results	24
7.1	Conducted power measurements	24
7.1.1	Conducted power measurements GSM850	25
7.1.2	Conducted power measurements GSM1900	25
7.1.3	Conducted power measurements UMTS Band V	26
7.1.4	Conducted power measurements UMTS Band II	26
7.1.5	Conducted power measurements BT	26
7.2	SAR measurement Result	27
7.2.1	SAR measurement Result of GSM850	27
7.2.2	SAR measurement Result of GSM1900	29
7.2.3	SAR measurement Result of UMTS Band V	30
7.2.4	SAR measurement Result of UMTS Band II	32
7.3	Multiple Transmitter Evaluation	34
7.3.1	Stand-alone SAR test exclusion	34
7.3.2	Simultaneous Transmission Possibilities	36
7.3.3	SAR Summation Scenario	36
7.3.4	Simultaneous Transmission Conclusion	37
	Appendix A. System Check Plots	38
	Appendix B. SAR Measurement Plots	38
	Appendix C. Calibration Certificate	38
	Appendix D. Photo documentation	38

※ ※ Modified History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2013-6-24	Qin Guohui

1 General Information

1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for HUAWEI U2805-5 is as below Table 1.

Band	Position*	MAX Reported SAR _{1g} (W/kg)
GSM850	Head	1.190
	Body Worn(15mm)	0.862
GSM1900	Head	0.548
	Body Worn(15mm)	0.637
UMTS Band V	Head	1.281
	Body Worn(15mm)	1.304
UMTS Band II	Head	1.091
	Body Worn(15mm)	0.952
BT	Head	0.295
	Body Worn(15mm)	0.098
The highest simultaneous SAR is 1.576 W/kg per KDB690783 D01		

Table 1: Summary of test result

Note:*The device does not support hotspot function. For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15 mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits of 1.6 W/Kg as averaged over any 1 g tissue according to the FCC rule §2.1093, the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2003 & IEEE Std 1528a-2005 and FCC OET Bulletin 65 Supplement C Edition 01-01.

1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.

1.3 EUT Description

Device Information:			
DUT Name:	UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth		
Type Identification:	HUAWEI U2805-5		
FCC ID:	QISHU2805-5		
SN No.:	Sample with camera: T8B4TA1351000009		
	Sample without camera: T8B4TA1332000111		
Device Type :	portable device		
Device Phase:	Identical Prototype		
Exposure Category:	uncontrolled environment / general population		
Hardware Version :	GOODY-V1.0		
Software Version :	U2805-5V100R001C00B201SP07S		
Antenna Type :	internal antenna		
Others Accessories	Headset		
Device Operating Configurations:			
Supporting Mode(s)	GSM850/1900, UMTS Band V/II(tested),BT		
Test Modulation	GSM(GMSK/8PSK), UMTS(QPSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band V	824-849	869-894
	UMTS Band II	1850-1910	1930-1990
	BT	2400-2483.5	2400-2483.5
GPRS Multislot Class(10)	Max Number of Timeslots in Uplink:		4
	Max Number of Timeslots in Downlink:		4
	Max Total Timeslot:		5
EGPRS Multislot Class(10)	Max Number of Timeslots in Uplink:		4
	Max Number of Timeslots in Downlink:		4
	Max Total Timeslot:		5
Power Class:	4, tested with power level 5(GSM850)		
	1, tested with power level 0(GSM1900)		
	3, tested with power control "all 1"(UMTS Band V)		
	3, tested with power control "all 1"(UMTS Band II)		
Test Channels (low-mid-high):	128-190-251 (GSM850)		
	512-661-810 (GSM1900)		
	4132-4182-4233 (UMTS Band V)		
	9262-9400-9538 (UMTS Band II)		
	0-39-78 (BT)		

Table 3: Device information and operating configuration

1.3.1 General Description

UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth HUAWEI U2805-5 is subscriber equipment in the WCDMA/GSM system. HUAWEI U2805-5 supports GSM/GPRS/EDGE 850/1900 and WCDMA850/1900. The Mobile Phone implements such functions as RF signal receiving/transmitting, UMTS and GSM/GPRS protocol processing, voice service etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

Battery

Name	Manufacture	Serials number	Description
Rechargeable Li-ion	Huawei Technologies Co.,Ltd.	1#: FH1303051900750 2#: XY1304010600106	Battery Model: HB5A3 Rated capacity: 1000mA Nominal Voltage: $\text{---} +3.7\text{V}$ Charging Voltage: $\text{---} +4.2\text{V}$

1.4 Test specification(s)

ANSI Std C95.1-1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.(IEEE Std C95.1-1991)
IEEE Std 1528-2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE Std 1528a-2005	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)
OET Bulletin No. 65, Supplement C Edition 01-01– 2001	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields---Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 4 of March 2010)
KDB941225 D01	SAR test for 3G devices v02
KDB648474 D04	SAR Handsets Multi Xmitter and Ant v01 r01
KDB447498 D01	General RF Exposure Guidance v05 r01
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01 r01
KDB865664 D02	SAR Reporting v01r01

1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Zone K3,Huawei Industrial Base, Bantian Industry Area, Longgang District, Shenzhen, Guangdong, China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT #2174.01

1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.7 Application details


Start Date of test	2013/06/18
End Date of test	2013/06/20

1.8 Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2 SAR Measurement System

2.1 SAR Measurement Set-up

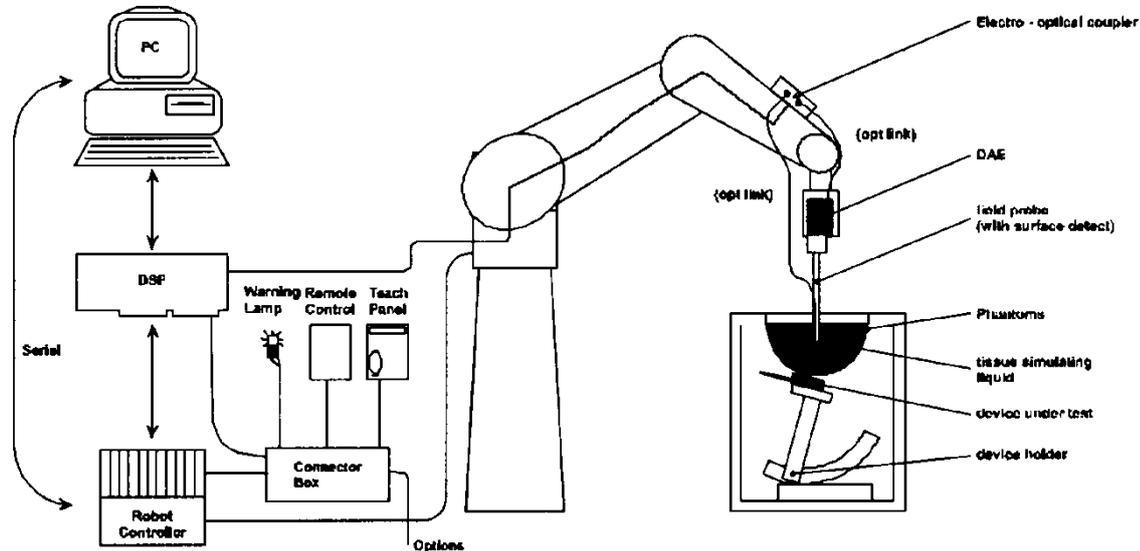

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows XP.
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

2.2 Test environment

The DASY4 measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment. The system allows the measurement of SAR values larger than 0.005 mW/g.

2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.


DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	

2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (± 2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

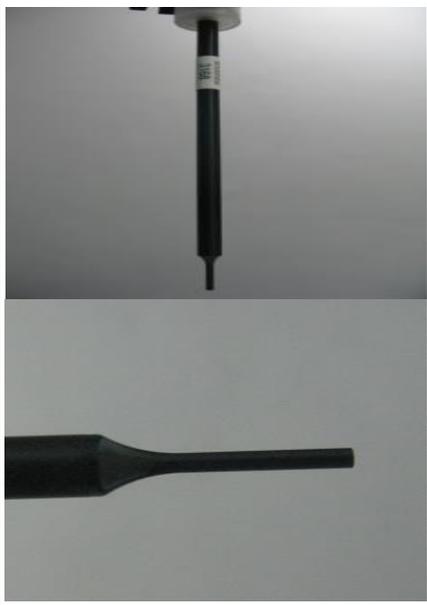Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	

2.5 Phantom description

SAM Twin Phantom

Shell Thickness	2mm +/- 0.2 mm; The ear region: 6mm	
Filling Volume	Approximately 30 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

ELI4 Phantom

Shell Thickness	2mm +/- 0.2 mm	
Filling Volume	Approximately 30 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Flat phantom	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

2.6 Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment
 Devices used during the test described are marked

	Manufacturer	Device	Type	Serial number	Date of last calibration)*	Valid period
<input type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3736	2012-04-26	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3744	2012-07-27	One year
<input type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	ES3DV3	3168	2012-10-02	One year
<input checked="" type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d126	2011-11-07	Three years
<input type="checkbox"/>	SPEAG	1800 MHz Dipole	D1800V2	2d184	2011-03-08	Three years
<input checked="" type="checkbox"/>	SPEAG	1900 MHz Dipole	D1900V2	5d143	2011-09-26	Three years
<input type="checkbox"/>	SPEAG	2000 MHz Dipole	D2000V2	1052	2011-03-10	Three years
<input type="checkbox"/>	SPEAG	2300 MHz Dipole	D2300V2	1016	2011-11-22	Three years
<input type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	860	2011-03-08	Three years
<input type="checkbox"/>	SPEAG	2600 MHz Dipole	D2600V2	1021	2011-11-22	Three years
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1236	2012-11-23	One year
<input type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	913	2011-12-23	One year
<input checked="" type="checkbox"/>	SPEAG	Software	DASY 5	N/A	N/A	N/A
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM1	TP-1475	N/A	N/A
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM2	TP-1474	N/A	N/A
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM3	TP-1597	N/A	N/A
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM4	TP-1620	N/A	N/A
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1038	N/A	N/A
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1111	N/A	N/A
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	113989	2013-06-08	One year
<input checked="" type="checkbox"/>	Agilent)*	Network Analyser	E5071B	MY42404956	2013-02-27	One year
<input checked="" type="checkbox"/>	Agilent	Dielectric Probe Kit	85070E	2484	N/A	N/A
<input checked="" type="checkbox"/>	Agilent	Signal Generator	N5181A	MY47420989	2013-02-27	One year
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA0746001	N/A	N/A
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4417A	MY45101339	2013-02-26	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY44420359	2013-02-26	One year

Note: All the test equipments are calibrated once a year, except the dipoles, which are calibrated every three years. Moreover, we have self-calibration every year to the dipoles.

1) Per KDB 450824 D02 requirements for dipole calibration, Huawei SAR lab has adopted three years calibration interval. But each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

3 SAR Measurement Procedure

3.1 Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension($\leq 2\text{GHz}$), 12 mm in x- and y- dimension(2-4GHz) and 10mm in x- and y- dimension(4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 4\text{GHz} - \leq 5\text{ mm}$ and $4-6\text{ GHz} - \leq 4\text{ mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$, $3-4\text{ GHz} - \leq 4\text{ mm}$ and $4-6\text{GHz} - \leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 7 x 7 x 7 points. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

3.3 Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a ₁₀ , a ₁₁ , a ₁₂
	- Conversion factor	ConvF _i
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with	V _i	= compensated signal of channel i	(i = x, y, z)
	U _i	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field (DASY parameter)	
	dcp _i	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$$

with V_i = compensated signal of channel i (i = x, y, z)
 $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
 [mV/(V/m)²] for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

4 System Verification Procedure

4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Head Tissue				
Frequency Band (MHz)	835	1800	1900	2450	2600
Water	41.45	52.64	55.242	62.7	55.242
Salt (NaCl)	1.45	0.36	0.306	0.5	0.306
Sugar	56.0	0.0	0.0	0.0	0.0
HEC	1.0	0.0	0.0	0.0	0.0
Bactericide	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	47.0	44.542	36.8	44.452
Ingredients (% of weight)	Body Tissue				
Frequency Band (MHz)	835	1800	1900	2450	2600
Water	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.40	0.13	0.13	0.04	0.024
Sugar	45.0	0.0	0.0	0.0	0.0
HEC	1.0	0.0	0.0	0.0	0.0
Bactericide	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	29.96	29.96	26.7	32.252

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M Ω + resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r (+/-5%)	σ (S/m) (+/-5%)	ϵ_r	σ (S/m)		
835H	825	41.60 (39.52~43.68)	0.90 (0.86~0.95)	42.05	0.877	21.4°C	2013-6-18
	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	41.93	0.898		
	850	41.50 (39.43~43.58)	0.92 (0.87~0.96)	41.46	0.906		
835B	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.93	0.963	21.4°C	2013-6-20
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	55.04	0.968		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	54.77	1.004		
1900H	1850	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.79	1.394	21.4°C	2013-6-19
	1880	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.64	1.418		
	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.56	1.436		
	1910	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.53	1.445		

1900B	1850	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.16	1.507	21.4°C	2013-6-20
	1880	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.03	1.531		
	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	52.98	1.549		
	1910	53.30 (50.64~55.97)	1.52 (1.44~1.60)	52.95	1.558		
ϵ_r = Relative permittivity, σ = Conductivity							

Table 5: Measured Tissue Parameter

Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2) KDB 450824 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

4.2 System Check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests (Graphic Plot(s) see Appendix A).


System Check	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)		
D835V2 Head	9.40 (8.46~10.34)	6.16 (5.54~6.78)	9.88	6.48	21.4°C	2013-6-18
D1900V2 Head	40.60 (36.54~44.66)	21.20 (19.08~23.32)	40.80	20.80	21.4°C	2013-6-19
D835V2 Body	9.54 (8.59~10.49)	6.29 (5.66~6.92)	9.76	6.40	21.4°C	2013-6-20
D1900V2 Body	41.40 (37.26~45.54)	21.80 (19.62~23.98)	42.80	21.76	21.4°C	2013-6-20

Table 6: System Check Results

4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

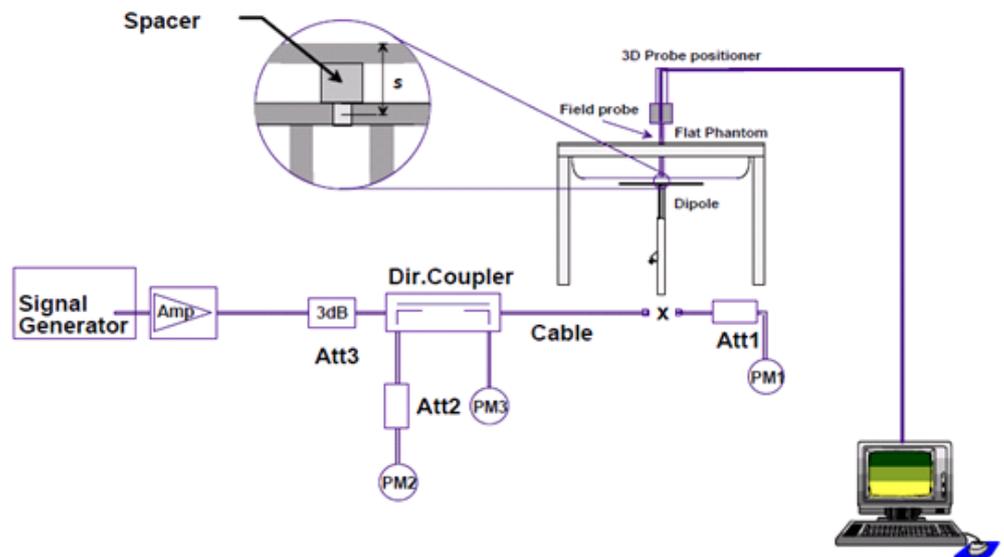

5 Measurement Uncertainty Evaluation

5.1 Measurement uncertainty evaluation for SAR test

The overall combined measurement uncertainty of the measurement system is $\pm 10.9\%$ ($K=1$).
The expanded uncertainty ($k=2$) is assessed to be $\pm 21.9\%$

This measurement uncertainty budget is suggested by IEEE P1528 and determined by Schmid & Partner Engineering AG. The breakdown of the individual uncertainties is as follows:

Error Sources	Uncertainty Value	Probability Distribution	Divisor	c_i 1g	c_i 10g	Standard Uncertainty 1g	Standard Uncertainty 10g	v_i^2 or v_{eff}
Measurement System								
Probe calibration	$\pm 6.0\%$	Normal	1	1	1	$\pm 6.0\%$	$\pm 6.0\%$	∞
Axial isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9\%$	$\pm 1.9\%$	∞
Hemispherical isotropy	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9\%$	$\pm 3.9\%$	∞
Spatial resolution	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Boundary effects	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Probe linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
System detection limits	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Readout electronics	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Response time	$\pm 0.8\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$	∞
Integration time	$\pm 2.6\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5\%$	$\pm 1.5\%$	∞
RF ambient conditions	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Probe positioner	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$	∞
Probe positioning	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Max. SAR evaluation	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Test Sample Related								
Device positioning	$\pm 2.9\%$	Normal	1	1	1	$\pm 2.9\%$	$\pm 2.9\%$	145
Device holder uncertainty	$\pm 3.6\%$	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	5
Power drift	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	∞
Phantom and Set-up								
Phantom uncertainty	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
Liquid conductivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
Liquid conductivity (meas.)	$\pm 2.5\%$	Normal	1	0.64	0.43	$\pm 1.6\%$	$\pm 1.1\%$	∞
Liquid permittivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
Liquid permittivity (meas.)	$\pm 2.5\%$	Normal	1	0.6	0.49	$\pm 1.5\%$	$\pm 1.2\%$	∞
Combined Uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					$\pm 10.9\%$	$\pm 10.7\%$	387
Expanded Std. Uncertainty	$U_e = 2u_c$	Normal	K=2			$\pm 21.9\%$	$\pm 21.4\%$	

Table 7: Measurement uncertainties

5.2 Measurement uncertainty evaluation for system check

The overall combined measurement uncertainty of the measurement system is $\pm 9.5\%$ ($K=1$).

The expanded uncertainty ($k=2$) is assessed to be $\pm 18.9\%$

This measurement uncertainty budget is suggested by IEEE P1528 and determined by Schmid & Partner Engineering AG. The breakdown of the individual uncertainties is as follows:

Error Sources	Uncertainty Value	Probability Distribution	Divisor	c_i 1g	c_i 10g	Standard Uncertainty 1g	Standard Uncertainty 10g	v_i^2 or v_{eff}
Measurement System								
Probe calibration	$\pm 6.0\%$	Normal	1	1	1	$\pm 6.0\%$	$\pm 6.0\%$	∞
Axial isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
Hemispherical isotropy	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 0.0\%$	$\pm 0.0\%$	∞
Boundary effects	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Probe linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
System detection limits	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Readout electronics	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Response time	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Integration time	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
RF ambient conditions	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Probe positioner	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$	∞
Probe positioning	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Max. SAR evaluation	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Dipole								
Deviation of experimental dipole	$\pm 5.5\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 3.2\%$	$\pm 3.2\%$	∞
Dipole axis to liquid distance	$\pm 2.0\%$	Rectangular	1	1	1	$\pm 1.2\%$	$\pm 1.2\%$	∞
Power drift	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
Phantom and Set-up								
Phantom uncertainty	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
Liquid conductivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
Liquid conductivity (meas.)	$\pm 2.5\%$	Normal	1	0.64	0.43	$\pm 1.6\%$	$\pm 1.1\%$	∞
Liquid permittivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
Liquid permittivity (meas.)	$\pm 2.5\%$	Normal	1	0.6	0.49	$\pm 1.5\%$	$\pm 1.2\%$	∞
Combined Uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} u_i^2}$					$\pm 9.5\%$	$\pm 9.2\%$	
Expanded Std. Uncertainty	$U_e = 2u_c$	Normal	K=2			$\pm 18.9\%$	$\pm 18.4\%$	

Table 8: Measurement uncertainties

6 SAR Test Configuration

6.1 GSM Test Configuration

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to “5”and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot.

The allowed power reduction in the multi-slot configuration is as following:

Number of timeslots in uplink assignment		Reduction of maximum output power (dB)
Band	Time Slots	GPRS (GMSK)
GSM850	1 TX slot	0
	2 TX slots	1
	3 TX slots	2
	4 TX slots	3
GSM1900	1 TX slot	0
	2 TX slots	1
	3 TX slots	2
	4 TX slots	3

Table 9: The allowed power reduction in the multi-slot configuration of GSM

6.2 UMTS Test Configuration

1) RMC

As the SAR body tests for UMTS Band V/II, we established the radio link through call processing. The maximum output power were verified on high, middle and low channels for each test band according to 3GPP TS 34.121 with the following configuration:

- 1) 12.2kbps RMC, 64,144,384 kbps RMC with TPC set to 'all 1'.
- 2) Test loop Mode 1.

For the output power, the configurations for the DPCCH and DPDCH₁ are as followed (EUT do not support the DPDCH_{2-n})

	Channel Bit Rate (kbps)	Channel Symbol Rate (ksps)	Spreading Factor	Spreading Code Number	Bits/Slot
DPCCH	15	15	256	0	10
DPDCH ₁	15	15	256	64	10
	30	30	128	32	20
	60	60	64	16	40
	120	120	32	8	80
	240	240	16	4	160
	480	480	8	2	320
	960	960	4	1	640
DPDCH _n	960	960	4	1, 2, 3	640

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all "1s". SAR for other spreading codes and multiple DPDCH_n, when supported by the EUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCH_n configuration, are less than ¼ dB higher than those measured in 12.2 kbps RMC.

7 SAR Measurement Results

7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200 was used.

SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

Note: CMU200 measures GSM peak and average output power for active timeslots. For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
timebased avg. power compared to slotted avg. power	-9.19dB	-6.13dB	-4.42dB	-3.18dB

The signalling modes differ as follows:

mode	coding scheme	modulation
GPRS	CS1 to CS4	GMSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

7.1.1 Conducted power measurements GSM850

GSM850		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		128CH	190CH	251CH		128CH	190CH	251CH
GSM (CS)		32.09	32.11	32.12	-9.19	22.90	22.92	22.93
GPRS (GMSK)	1 Tx Slot	32.11	32.17	32.17	-9.19	22.92	22.98	22.98
	2 Tx Slots	31.32	31.39	31.45	-6.13	25.19	25.26	25.32
	3 Tx Slots	29.91	30.01	30.09	-4.42	25.49	25.59	25.67
	4 Tx Slots	29.11	29.17	29.29	-3.18	25.93	25.99	26.11

Table 10: Test results conducted power measurement GSM850

Note: 1) The conducted power of GSM850 is measured with RMS detector.

2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

7.1.2 Conducted power measurements GSM1900

GSM1900		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
GSM (CS)		29.87	29.79	29.79	-9.19	20.68	20.60	20.60
GPRS (GMSK)	1 Tx Slot	29.88	29.78	29.83	-9.19	20.69	20.59	20.64
	2 Tx Slots	29.16	29.04	29.06	-6.13	23.03	22.91	22.93
	3 Tx Slots	27.39	27.13	27.06	-4.42	22.97	22.71	22.64
	4 Tx Slots	26.42	26.06	25.93	-3.18	23.24	22.88	22.75

Table 11: Test results conducted power measurement GSM1900

Note: 1) The conducted power of GSM1900 is measured with RMS detector.

2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

7.1.3 Conducted power measurements UMTS Band V

UMTS Band V		Conducted Power (dBm)		
		4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	23.63	23.75	23.53
	64kbps RMC	23.62	23.73	23.51
	144kbps RMC	23.65	23.71	23.51
	384kbps RMC	23.66	23.73	23.51

Table 12:Test results conducted power measurement UMTS Band V

Note: The conducted power of UMTS Band V is measured with RMS detector.

7.1.4 Conducted power measurements UMTS Band II

UMTS Band II		Conducted Power (dBm)		
		9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	23.26	22.95	22.68
	64kbps RMC	23.25	22.95	22.69
	144kbps RMC	23.27	22.91	22.64
	384kbps RMC	23.27	22.92	22.65

Table 13:Test results conducted power measurement UMTS Band II

Note: The conducted power of UMTS Band II is measured with RMS detector.

7.1.5 Conducted power measurements BT

The output power of BT antenna is as following:

BT 2450	Average Conducted Power (dBm)		
	0CH	39CH	78CH
	3.58	4.15	4.03

Table 14:Test results conducted power measurement BT.

Note: The conducted power of BT is measured with RMS detector.

7.2 SAR measurement Result

- 1) Per KDB447498 D01v05, testing of other required channels within the operating mode of a frequency band is not required when the reported (Scaled) SAR for the middle channel or highest output power channels is $\leq 0.8 \text{ W/kg}$. When the maximum output power variation across the required test channels is $> \frac{1}{2} \text{ dB}$, instead of the middle channel, the highest output power channel must be used.
- 2) Per KDB865664 D01v01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8 \text{ W/Kg}$; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR $< 1.45 \text{ W/Kg}$, only one repeated measurement is required.
- 3) Per KDB648474 D04v01, SAR is evaluated without a headset connected to the device. When the standalone reported SAR is $\leq 1.2 \text{ W/kg}$, no additional SAR evaluations using a headset are required.
- 4) Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
- 5) All measurement SAR result is scaled-up to account for tune-up tolerance is compliant.

7.2.1 SAR measurement Result of GSM850

Test Position of Head	Channel /Freq.(MHz)	Mode	SAR (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Tested with battery 1#									
Left Hand Touched	128/824.2	GSM	0.759	0.546	-0.010	32.09	32.50	0.834	21.4°C
Left Hand Touched	190/836.6	GSM	0.911	0.654	-0.120	32.11	32.50	0.997	21.4°C
Left Hand Touched	251/848.8	GSM	1.040	0.747	-0.020	32.12	32.50	1.135	21.4°C
Left Hand Tilted 15°	190/836.6	GSM	0.514	0.373	-0.070	32.11	32.50	0.562	21.4°C
Right Hand Touched	128/824.2	GSM	0.765	0.548	-0.120	32.09	32.50	0.841	21.4°C
Right Hand Touched	190/836.6	GSM	0.912	0.651	-0.110	32.11	32.50	0.998	21.4°C
Right Hand Touched	251/848.8	GSM	1.020	0.724	-0.050	32.12	32.50	1.113	21.4°C
Right Hand Tilted 15°	190/836.6	GSM	0.546	0.395	-0.110	32.11	32.50	0.597	21.4°C
Tested at worst position with the battery 2#									
Left Hand Touched	251/848.8	GSM	1.090	0.783	-0.140	32.12	32.50	1.190	21.4°C
Left Hand Touched-repeated*	251/848.8	GSM	1.080	0.771	-0.080	32.12	32.5	1.179	21.4°C
Tested at worst position with the sample without camera									
Left Hand Touched	251/848.8	GSM	1.070	0.763	0.040	32.12	32.5	1.168	21.4°C

Table 15: Test results head SAR GSM850

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664

Test Position of Body with 15mm	Channel /Freq.(MHz)	Mode	SAR (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Tested with battery 1#									
Towards Phantom	190/836.6	GSM	0.645	0.459	-0.160	32.11	32.50	0.706	21.4°C
Towards Ground	128/824.2	GSM	0.661	0.472	-0.090	32.09	32.50	0.726	21.4°C
Towards Ground	190/836.6	GSM	0.771	0.550	-0.060	32.11	32.50	0.843	21.4°C
Towards Ground	251/848.8	GSM	0.790	0.564	-0.140	32.12	32.50	0.862	21.4°C
Towards Ground-repeated*	251/848.8	GSM	0.780	0.557	-0.060	32.12	32.50	0.851	21.4°C
Tested at worst position with the battery 2#									
Towards Ground	251/848.8	GSM	0.771	0.552	-0.140	32.12	32.50	0.842	21.4°C
Tested at worst position with the sample without camera									
Towards Ground	251/848.8	GSM	0.776	0.556	-0.120	32.12	32.50	0.847	21.4°C

Table 16: Test results Body SAR GSM850

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664

7.2.2 SAR measurement Result of GSM1900

Test Position of Head	Channel /Freq.(MHz)	Mode	SAR (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Tested with battery 1#									
Left Hand Touched	661/1880	GSM	0.440	0.269	-0.090	29.79	30.50	0.518	21.4°C
Left Hand Tilted 15°	661/1880	GSM	0.254	0.153	-0.080	29.79	30.50	0.299	21.4°C
Right Hand Touched	661/1880	GSM	0.426	0.258	0.050	29.79	30.50	0.502	21.4°C
Right Hand Tilted 15°	661/1880	GSM	0.263	0.156	0.020	29.79	30.50	0.310	21.4°C
Tested at worst position with the battery 2#									
Left Hand Touched	661/1880	GSM	0.465	0.286	-0.100	29.79	30.50	0.548	21.4°C
Tested at worst position with the sample without camera									
Left Hand Touched	661/1880	GSM	0.458	0.280	-0.060	29.79	30.50	0.539	21.4°C

Table 17:Test results head SAR GSM1900

Test Position of Body with 15mm	Channel /Freq.(MHz)	Mode	SAR (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Tested with battery 1#									
Towards Phantom	661/1880	GSM	0.303	0.175	-0.170	29.79	30.50	0.357	21.4°C
Towards Ground	661/1880	GSM	0.515	0.296	-0.080	29.79	30.50	0.606	21.4°C
Tested at worst position with the battery 2#									
Towards Ground	661/1880	GSM	0.541	0.309	-0.050	29.79	30.50	0.637	21.4°C
Tested at worst position with the sample without camera									
Towards Ground	661/1880	GSM	0.469	0.269	-0.110	29.79	30.50	0.552	21.4°C

Table 18:Test results Body SAR GSM1900

7.2.3 SAR measurement Result of UMTS Band V

Test Position of Head	Channel /Freq.(MHz)	Mode	SAR (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Tested with battery 1#									
Left Hand Touched	4233/846.6	RMC	1.140	0.811	0.060	23.53	24.00	1.270	21.4°C
Left Hand Touched	4182/836.4	RMC	0.841	0.602	0.000	23.75	24.00	0.891	21.4°C
Left Hand Touched	4132/826.4	RMC	0.934	0.672	0.060	23.63	24.00	1.017	21.4°C
Left Hand Tilted 15°	4182/836.4	RMC	0.440	0.320	0.040	23.75	24.00	0.466	21.4°C
Right Hand Touched	4233/846.6	RMC	1.130	0.806	-0.070	23.53	24.00	1.259	21.4°C
Right Hand Touched	4182/836.4	RMC	0.843	0.600	-0.120	23.75	24.00	0.893	21.4°C
Right Hand Touched	4132/826.4	RMC	0.893	0.638	0.040	23.63	24.00	0.972	21.4°C
Right Hand Tilted 15°	4182/836.4	RMC	0.445	0.322	0.010	23.75	24.00	0.471	21.4°C
Tested at worst position with the battery 2#									
Left Hand Touched	4233/846.6	RMC	1.150	0.819	-0.170	23.53	24.00	1.281	21.4°C
Left Hand Touched-repeated*	4233/846.6	RMC	1.140	0.820	0.080	23.53	24.00	1.270	21.4°C
Tested at worst position with the sample without camera									
Left Hand Touched	4233/846.6	RMC	1.150	0.821	-0.070	23.53	24.00	1.281	21.4°C

Table 19: Test results head SAR UMTS Band V

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664

Test Position of Body with 15mm	Channel /Freq.(MHz)	Mode	SAR (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Tested with battery 1#									
Towards Phantom	4132/826.4	RMC	0.840	0.596	-0.130	23.53	24.00	0.936	21.4°C
Towards Phantom	4182/836.4	RMC	0.932	0.663	-0.050	23.75	24.00	0.987	21.4°C
Towards Phantom	4233/846.6	RMC	0.970	0.689	-0.120	23.63	24.00	1.056	21.4°C
Towards Ground	4132/826.4	RMC	1.120	0.803	-0.050	23.53	24.00	1.248	21.4°C
Towards Ground	4182/836.4	RMC	1.150	0.824	-0.080	23.75	24.00	1.218	21.4°C
Towards Ground	4233/846.6	RMC	1.150	0.818	-0.080	23.63	24.00	1.252	21.4°C
Towards Ground with Headset	4233/846.6	RMC	0.916	0.656	-0.090	23.53	24.00	1.021	21.4°C
Tested at worst position with the battery 2#									
Towards Ground	4233/846.6	RMC	1.130	0.802	-0.070	23.53	24.00	1.259	21.4°C
Tested at worst position with the sample without camera									
Towards Ground	4233/846.6	RMC	1.170	0.832	-0.100	23.53	24.00	1.304	21.4°C
Towards Ground-repeated	4233/846.6	RMC	1.170	0.837	-0.050	23.53	24.00	1.304	21.4°C

Table 20: Test results Body SAR UMTS Band V

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664

7.2.4 SAR measurement Result of UMTS Band II

Test Position of Head	Channel /Freq.(MHz)	Mode	SAR (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Tested with battery 1#									
Left Hand Touched	9400/1880	RMC	0.552	0.342	0.190	22.95	23.50	0.627	21.4°C
Left Hand Tilted 15°	9400/1880	RMC	0.346	0.210	-0.120	22.95	23.50	0.393	21.4°C
Right Hand Touched	9262/1852.4	RMC	1.000	0.610	0.030	23.26	23.50	1.057	21.4°C
Right Hand Touched-repeated*	9262/1852.4	RMC	0.971	0.574	0.090	23.26	23.50	1.026	21.4°C
Right Hand Touched	9400/1880	RMC	0.747	0.455	-0.190	22.95	23.50	0.848	21.4°C
Right Hand Touched	9538/1907.6	RMC	0.718	0.432	-0.040	22.68	23.50	0.867	21.4°C
Right Hand Tilted 15°	9400/1880	RMC	0.445	0.264	0.040	22.95	23.50	0.505	21.4°C
Tested at worst position with the battery 2#									
Right Hand Touched	9262/1852.4	RMC	0.956	0.567	0.140	23.25	23.50	1.013	21.4°C
Tested at worst position with the sample without camera									
Right Hand Touched	9262/1852.4	RMC	1.030	0.622	0.050	23.25	23.50	1.091	21.4°C

Table 21: Test results head SAR UMTS Band II

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664

Test Position of Body with 15mm	Channel /Freq.(MHz)	Mode	SAR (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Tested with battery 1#									
Towards Phantom	9400/1880	RMC	0.373	0.217	-0.100	22.95	23.50	0.423	21.4°C
Towards Ground	9262/1852.4	RMC	0.868	0.502	-0.050	23.26	23.50	0.917	21.4°C
Towards Ground	9400/1880	RMC	0.710	0.409	0.010	22.95	23.50	0.806	21.4°C
Towards Ground	9538/1907.6	RMC	0.732	0.421	0.030	22.68	23.50	0.884	21.4°C
Tested at worst position with the battery 2#									
Towards Ground	9262/1852.4	RMC	0.901	0.520	-0.020	23.26	23.50	0.952	21.4°C
Towards Ground-repeated*	9262/1852.4	RMC	0.897	0.517	0.030	23.26	23.50	0.948	21.4°C
Tested at worst position with the sample without camera									
Towards Ground	9262/1852.4	RMC	0.881	0.508	-0.170	23.26	23.50	0.931	21.4°C


Table 22: Test results Body SAR UMTS Band II

Note: * - repeated at the highest SAR measurement according to the FCC KDB 865664

7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v05.

The closest distance between BT/WiFi antenna and main antenna is 39.06mm, and the location of the antennas inside mobile phone is shown as below picture:

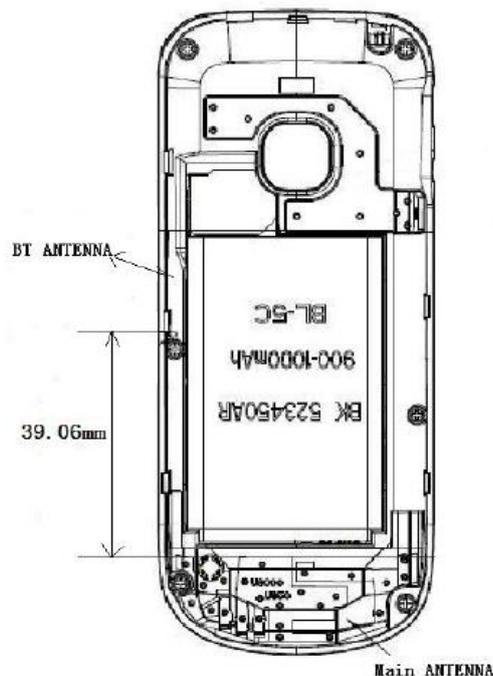

7.3.1 Stand-alone SAR test exclusion

The 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\left[\frac{\text{max. power of channel, including tune-up tolerance, mW}}{\text{min. test separation distance, mm}} \right] \cdot \sqrt{f(\text{GHz})} \leq 3.0$$
 for 1-g SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

a) Head position

Mode	P _{max} (dBm)*	P _{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	Exclusion threshold	SAR test exclusion
GSM850	32.50	1778.28	5	0.850	327.90	3.00	No
GSM1900	30.50	1122.02	5	1.900	309.32	3.00	No
UMTS Band V	24.00	251.19	5	0.850	46.32	3.00	No
UMTS Band II	23.50	223.87	5	1.900	61.72	3.00	No
BT	8.50	7.08	5	2.450	2.22	3.00	Yes

Table 23: Standalone SAR test exclusion in head position

Note: * - maximum possible output power declared by manufacturer

b) Body position

Mode	P _{max} (dBm)*	P _{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	Exclusion threshold	SAR test exclusion
GSM850	32.50	1778.28	5	0.850	327.90	3.00	No
GSM1900	30.50	1122.02	5	1.900	309.32	3.00	No
UMTS Band V	24.00	251.19	5	0.850	46.32	3.00	No
UMTS Band II	23.50	223.87	5	1.900	61.72	3.00	No
BT	8.50	7.08	5	2.450	2.22	3.00	Yes

Table 24: Standalone SAR test exclusion in body position

Note: * - maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot$$

$$[\sqrt{f(\text{GHz})/x}] \text{ W/kg for test separation distances } \leq 50 \text{ mm, where } x = 7.5 \text{ for 1-g SAR.}$$

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Mode	Position	P _{max} (dBm)*	P _{max} (mW)	Distance (mm)	f (GHz)	X	Estimated SAR (W/Kg)*
BT	Head	8.50	7.08	5	2.450	7.5	0.295
BT	Body	8.50	7.08	15	2.450	7.5	0.098

Table 25: Estimated SAR calculation for BT

Note: * - maximum possible output power declared by manufacturer

7.3.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities are as below:

Simultaneous Tx Combination	Configuration	Head	Body-Worn
2	GSM/ GPRS + BT	Yes	Yes
4	UMTS + BT	Yes	Yes

Table 26: Simultaneous Transmission Possibilities

7.3.3 SAR Summation Scenario

Test Position		Scaled SAR _{Max}		Σ1-g SAR	SPLSR	Remark
		GSM850	BT			
Head	Left Hand Touched	1.190	0.295	1.485	N/A	N/A
	Left Hand Tilted 15°	0.562	0.295	0.857	N/A	N/A
	Right Hand Touched	1.113	0.295	1.408	N/A	N/A
	Right Hand Tilted 15°	0.597	0.295	0.892	N/A	N/A
Body-Worn	Towards Phantom	0.706	0.098	0.804	N/A	N/A
	Towards Ground	0.862	0.098	0.96	N/A	N/A

Table 27: Simultaneous Tx Combination of GSM850 and BT

Test Position		Scaled SAR _{Max}		Σ1-g SAR	SPLSR	Remark
		GSM1900	BT			
Head	Left Hand Touched	0.548	0.295	0.843	N/A	N/A
	Left Hand Tilted 15°	0.299	0.295	0.594	N/A	N/A
	Right Hand Touched	0.502	0.295	0.797	N/A	N/A
	Right Hand Tilted 15°	0.310	0.295	0.605	N/A	N/A
Body-Worn	Towards Phantom	0.357	0.098	0.455	N/A	N/A
	Towards Ground	0.637	0.098	0.735	N/A	N/A

Table 28: Simultaneous Tx Combination of GSM1900 and BT

Test Position		Scaled SAR _{Max}		Σ1-g SAR	SPLSR	Remark
		UMTS Band V	BT			
Head	Left Hand Touched	1.281	0.295	1.576	N/A	N/A
	Left Hand Tilted 15°	0.466	0.295	0.761	N/A	N/A
	Right Hand Touched	1.259	0.295	1.554	N/A	N/A
	Right Hand Tilted 15°	0.471	0.295	0.766	N/A	N/A
Body-Worn	Towards Phantom	1.056	0.098	1.154	N/A	N/A
	Towards Ground	1.304	0.098	1.402	N/A	N/A

Table 29: Simultaneous Tx Combination of UMTS Band V and BT

Test Position		Scaled SAR _{Max}		Σ1-g SAR	SPLSR	Remark
		UMTS Band II	BT			
Head	Left Hand Touched	0.627	0.295	0.922	N/A	N/A
	Left Hand Tilted 15°	0.393	0.295	0.688	N/A	N/A
	Right Hand Touched	1.091	0.295	1.386	N/A	N/A
	Right Hand Tilted 15°	0.505	0.295	0.800	N/A	N/A
Body-Worn	Towards Phantom	0.423	0.098	0.521	N/A	N/A
	Towards Ground	0.952	0.098	1.050	N/A	N/A

Table 30: Simultaneous Tx Combination of UMTS Band II and BT

7.3.4 Simultaneous Transmission Conclusion

The above numeral summed SAR results and SPLSR analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01v05

Appendix A. System Check Plots
(Pls See Appendix A.)

Appendix B. SAR Measurement Plots
(Pls See Appendix B.)

Appendix C. Calibration Certificate
(Pls See Appendix C.)

Appendix D. Photo documentation
(Pls See Appendix D.)

End