



Accredited testing laboratory

CNAS Registration number: L0310

Report On SAR Test of WCDMA/GPRS/GSM Mobile Phone with Bluetooth

M/N: HUAWEI U3100-5/U3100-5

Test report no. : SYBH(Z-SAR)212012010
Type identification : HUAWEI U3100-5/U3100-5
FCC-ID : QISU3100-5
Test specification : IEEE 1528-2003
: ANSI C95.1-1999
: RSS-102 issue 2 (2005)
: OET Bulletin 65 Supplement C
: IEC 62209-2:2008(106/162/CDV)

Table of Contents

1	General Information.....	3
1.1	Notes.....	3
1.1.1	Statement of Compliance.....	3
1.2	Testing laboratory.....	4
1.3	Details of applicant.....	4
1.4	Application details.....	4
1.5	Test item.....	5
1.5.1	EUT Description.....	6
1.6	Test specification(s).....	6
1.6.1	RF exposure limits.....	6
2	Technical test.....	8
2.1	Summary of test results.....	8
2.2	Test environment.....	8
2.3	Measurement and test set-up.....	8
2.4	Measurement system.....	9
2.4.1	System Description.....	9
2.4.2	Test environment.....	10
2.4.3	Probe description.....	10
2.4.4	Phantom description.....	12
2.4.5	Device holder description.....	12
2.4.6	Scanning procedure.....	13
2.4.7	Spatial Peak SAR Evaluation.....	14
2.4.8	Data Storage and Evaluation.....	15
2.4.9	Test equipment utilized.....	17
2.4.10	Tissue simulating liquids: dielectric properties.....	18
2.4.11	Tissue simulating liquids: parameters.....	19
2.4.12	Measurement uncertainty evaluation for SAR test.....	20
2.4.13	Measurement uncertainty evaluation for system validation.....	21
2.4.14	System validation.....	22
2.4.15	Validation procedure.....	23
2.5	Test Results.....	24
2.5.1	Conducted power measurements.....	24
2.5.2	Conducted power measurements.....	24
2.5.3	Justification of SAR measurements in GSM mode.....	26
2.5.4	Multiple Transmitter Information.....	26
2.6	Test results (Head and Body SAR).....	28
2.6.1	General description of test procedures.....	32
Annex 1	System performance verification.....	33
Annex 2	Measurement results (printout from DASY TM).....	41
Annex 2.1	GSM 850 MHz head.....	41
Annex 2.2	GSM 850 MHz body.....	47
Annex 2.3	UMTS (WCDMA) FDD V 850MHz head.....	53
Annex 2.4	UMTS (WCDMA) FDD V 850MHz body.....	59
Annex 2.5	PCS 1900 MHz head.....	65
Annex 2.6	PCS 1900 MHz body.....	71
Annex 2.7	UMTS (WCDMA) FDD II 1900MHz head.....	77
Annex 2.8	UMTS (WCDMA) FDD II 1900MHz body.....	83
Annex 2.9	Z-axis scans.....	89
Annex 3	Calibration parameters.....	100
Annex 4	Photo documentation.....	100
Annex 4.1	Test Facility.....	100
Annex 4.2	Test Positions.....	100
Annex 4.3	Liquid depth.....	100

1 General Information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The HUAWEI does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of HUAWEI.

1.1.1 Statement of Compliance

The SAR values found for the HUAWEI U3100-5/U3100-5 are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1 g tissue according to the FCC rule §2.1093, the ANSI/IEEE C 95.1:1999, the NCRP Report Number 86 for uncontrolled environment, according to the Health Canada's Safety Code 6 and the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure.


For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15 mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The measurement together with the test system set-up is described in chapter 2.3 of this test report. A detailed description of the equipment under test can be found in chapter 1.5.

Test engineer:

2010-01-29

Pan Lifang



Date

Name

Signature

Reviewed by:

2010-01-31

Hu Zhongxun



Date

Name

Signature

Approved by:

2010-01-31

Liu Chunlin



Date

Name

Signature

1.2 Testing laboratory

Huawei Technologies Co.,Ltd.
Street: Bantian, Longgang District, Shenzhen
Country: P.R.China

Telephone: +86-755-28785278
Fax: +86-755-36834474

e-mail: huzhongxun@huawei.com
Internet: www.huawei.com

State of accreditation: The Test laboratory (area of testing) is accredited according to
ISO/IEC 17025.
CNAS Registration number: L0310

1.3 Details of applicant

Name: HUAWEI TECHNOLOGIES CO., LTD
Street: Huawei Base, Bantian
Town: Longgang District, Shenzhen
Country: China
Contact: Mr. Qiu Wei
Telephone: +86-10-82836236

1.4 Application details

Date of receipt of application: 2010-01-20
Date of receipt of test item: 2010-01-20
Start/Date of test: 2010-01-23
End/Date of test: 2010-01-28
Person(s) present during the test: ---

1.5 Test item

Description of the test item: WCDMA/GPRS/GSM Mobile Phone with Bluetooth
 Type identification: HUAWEI U3100-5/U3100-5
 FCC-ID : QISU3100-5
 Serial number: SO2AA11020200105
 Manufacturer: Huawei Technologies Co.,Ltd.
 Name: Huawei Technologies Co.,Ltd.
 Street: Huawei Base, Bantian
 Town: Longgang District, Shenzhen
 Country: P.R.China

additional information on the DUT:		
device type :	portable device	
IMEI No :	351580040001063	
exposure category:	uncontrolled environment / general population	
test device production information	production unit	
operating mode(s)	GSM, PCS,UMTS/WCDMA ,Bluetooth	
modulation	GMSK,QPSK	
GPRS mobile station class :	B	
GPRS multislot class :	10	voice mode : ---
maximum no. of timeslots in uplink:	2	
operating frequency range(s)	transmitter frequency range	receiver frequency range
GSM850 (tested):	824.2 MHz ~ 848.8 MHz	869.2 MHz ~ 893.8 MHz
PCS 1900 (tested):	1850.2 MHz ~ 1909.8 MHz	1930.2 MHz ~ 1989.8 MHz
UMTS/WCDMA FDD V (tested):	826.4 MHz ~ 846.6 MHz	871.4 MHz ~ 891.6 MHz
UMTS/WCDMA FDD II (tested):	1852.4 MHz ~ 1907.6 MHz	1932.4 MHz ~ 1987.6 MHz
Power class :	4,tested with power level 5 (850 MHz band)	
	1,tested with power level 0 (1900 MHz band)	
	3,tested with maximum output power (850 MHz band)	
	3,tested with maximum output power (1900 MHz band)	
measured peak output power (conducted):	850 MHz band:32.59dBm (GMSK)	
	1900 MHz band: 29.63dBm (GMSK)	
	850 MHz band:22.65dBm (QPSK)	
	1900 MHz band:22.58dBm (QPSK)	
test channels (low-mid-high) :	128-190-251 (850 MHz band)	
	512-661-810 (1900 MHz band)	
	4132-4183-4233 (850 MHz band)	
	9262-9400-9538 (1900 MHz band)	
hardware version :	HD1U310M Ver.A	
software version :	U3105V100R001ENG01B103	
antenna type :	Integrated antenna	
accessories/body-worn configurations:	Stereo headset	
battery options :	Huawei Battery HB5A2 Li-Polymer 3.7V,1000mAh S/N: GAG9B13XC4614301	
charger options :	Huawei AC/DC Adapter Model: HS-050040E5 , S/N: HKA991896379	

1.5.1 EUT Description

WCDMA/GPRS/GSM Mobile Phone with Bluetooth-HUAWEI U3100-5/U3100-5 is subscriber equipment in the WCDMA/GSM system. The WCDMA frequency band is Band II and Band V, they can be used in this report. The GSM/GPRS frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only GSM850 and PCS1900MHz band test data included in this report. The Mobile Phone implements such functions as RF signal receiving/Transmitting, WCDMA and GSM/GPRS protocol processing, voice, video and MMS service etc. Externally it provides micro SD card interface, earphone port(to provide voice service) and USIM card interface .It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

1.6 Test specification(s)

Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01)

IEEE 1528-2003 (April 21, 2003): Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques

RSS-102: Radio Frequency Exposure Compliance of Radiocommunication Apparatus
(All Frequency Bands (Issue 2 of November 2005))

Canada's Safety Code 6: Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz (99-EHD-237)

IEEE Std C95.3 – 1991, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave.

IEEE Std C95.1 – 1999, IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.

IEC 62209-2:2008(106/162/CDV), Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices – Human models, Instrumentation, and Procedures Part 2: Procedure to determine the specific absorption rate (SAR) for mobile wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)

1.6.1 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR***	4.00 mW/g	20.00 mW/g

(Hands/Feet/Ankle/Wrist)		
--------------------------	--	--

Table 1: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.	☒
The deviations as specified in 2.5 were ascertained in the course of the tests performed.	☐

The maximum SAR of HUAWEI U3100-5 head position is 1.09W/kg.
The maximum SAR of HUAWEI U3100-5 body position is 0.813W/kg.

2.2 Test environment

General Environment conditions in the test area are as follows:

Ambient temperature: 20°C – 24°C
Tissue simulating liquid: 20°C – 24°C
Humidity: 30% – 70%

Exact temperature values for each test are shown in the table(s) under 2.5. and/or on the measurement plots.

2.3 Measurement and test set-up


The measurement system is described in chapter 2.4.

The test setup for the system validation can be found in chapter 2.4.14.

A description of positioning and test signal control can be found in chapter 2.5 together with the test results.

2.4 Measurement system

2.4.1 System Description

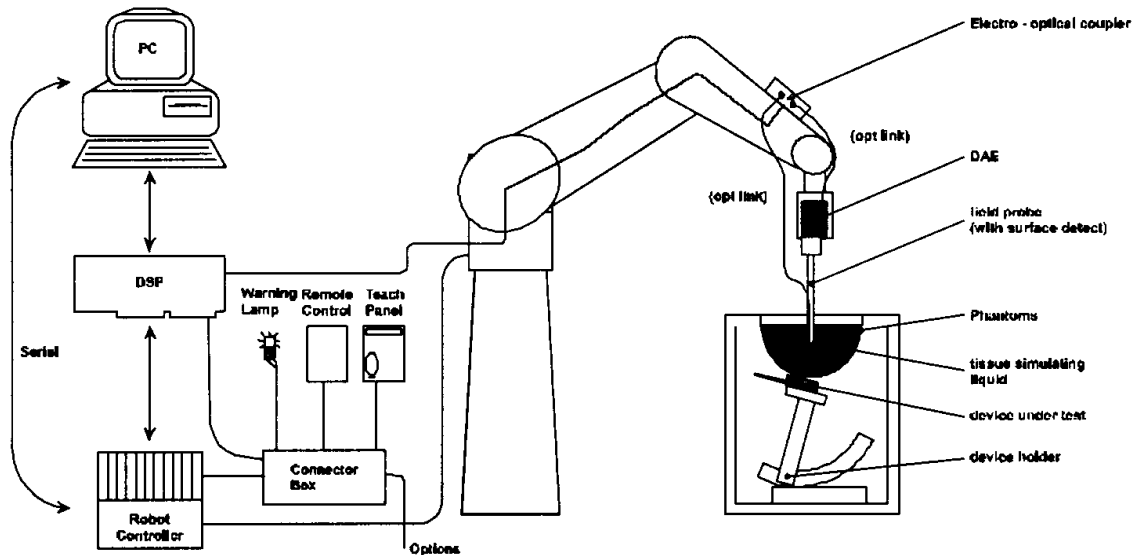

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows XP.
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

2.4.2 Test environment

The DASY5 measurement system is placed at the head end of a room with dimensions: 4.5 x 4 x 3 m³, the SAM phantom is placed in a distance of 1.3 m from the side walls and 1.1m from the rear wall.

Picture 1 of the photo documentation shows a complete view of the test environment.

The system allows the measurement of SAR values larger than 0.005 mW/g.

2.4.3 Probe description

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Technical data according to manufacturer information	
Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration	In air from 10 MHz to 2.5 GHz In head tissue simulating liquid (HSL) at 900 (800-1000) MHz and 1.8 GHz (1700-1910 MHz) (accuracy $\pm 11\%$; k=2) Calibration for other liquids and frequencies upon request
Frequency	10 MHz to 3 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces (EX3DV4 only)
Dimensions	Overall length: 337 mm Tip length: 9 mm Body diameter: 10 mm Tip diameter: 2.5 mm Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (EX3DV4)


Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

Technical data according to manufacturer information	
Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones

2.4.4 Phantom description

The used SAM Phantom meets the requirements specified in Edition 01-01 of Supplement C to OET Bulletin 65 for Specific Absorption Rate (SAR) measurements.

The phantom consists of a fibreglass shell integrated in a wooden table. It allows left-hand and right-hand head as well as body-worn measurements with a maximum liquid depth of 18 cm in head position and 22 cm in planar position (body measurements). The thickness of the Phantom shell is 2 mm +/- 0.1 mm.

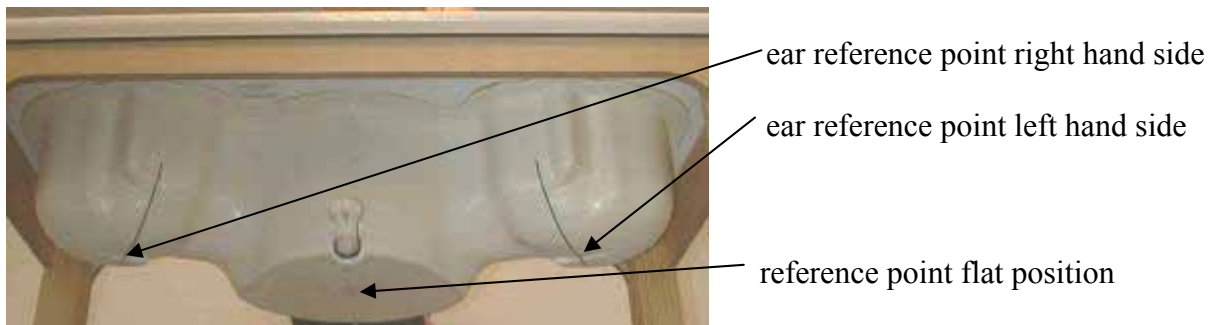

2.4.5 Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

2.4.6 Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The „reference“ and „drift“ measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. +/- 5 %.
- The „surface check“ measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The „area scan“ measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension. If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in annex 2.
- A „7x7x7 zoom scan“ measures the field in a volume around the 2D peak SAR value acquired in the previous „coarse“ scan. This is a fine 7x7 grid where the robot additionally moves the probe in 7 steps along the z-axis away from the bottom of the Phantom. Grid spacing for the cube measurement is 5 mm in x and y-direction and 5 mm in z-direction. DASY5 is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in annex 2. Test results relevant for the specified standard (see chapter 1.6.) are shown in table form in chapter 2.5.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in annex 2.

2.4.7 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 7 x 7 x 7 points. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

2.4.8 Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$\text{Norm}_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	ConvF_i
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with V_i = compensated signal of channel i (i = x, y, z)
 U_i = input signal of channel i (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

with V_i = compensated signal of channel i (i = x, y, z)
 $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

2.4.9 Test equipment utilized

This table gives a complete overview of the SAR measurement equipment

Devices used during the test described in chapter 2.5. are marked ☒

	Manufacturer	Device	Type	Serial number	Date of last calibration
☐					
☒	Schmid & Partner Engineering AG	Dosimetric E-Field Probe	ES3DV3	3168	2009-12-18
☒	Schmid & Partner Engineering AG	835 MHz System Validation Dipole	D835V2	4d095	2009-05-25
☐	Schmid & Partner Engineering AG	900 MHz System Validation Dipole	D900V2	1d063	2009-05-26
☐	Schmid & Partner Engineering AG	1800 MHz System Validation Dipole	D1800V2	2d157	2009-05-27
☒	Schmid & Partner Engineering AG	1900 MHz System Validation Dipole	D1900V2	5d091	2009-05-28
☐	Schmid & Partner Engineering AG	2000 MHz System Validation Dipole	D2000V2	1036	2009-05-29
☒	Schmid & Partner Engineering AG	Data acquisition electronics	DAE4	851	2009-05-14
☐	Schmid & Partner Engineering AG	Data acquisition electronics	DAE4	852	2009-12-18
☒	Schmid & Partner Engineering AG	Software	DASY 5 V5.0	N/A	N/A
☒	Schmid & Partner Engineering AG	Twin Phantom	SAM1	TP-1475	N/A
☒	Schmid & Partner Engineering AG	Twin Phantom	SAM2	TP-1474	N/A
☒	Rohde & Schwarz	Universal Radio Communication Tester	CMU 200	111379	2009-09-26
☒	Agilent)*	Network Analyser 300 kHz to 8.5 GHz	E5071B	MY42404956	2009-03-27
☒	Agilent	Dielectric Probe Kit	85070E	2484	N/A
☒	Agilent	Signal Generator	N5181A	MY47420989	2009-03-25
☒	MINI-CIRCUITS	Amplifier	ZHL-42W	QA0746001	N/A
☒	Agilent	Power Meter	E4417A	MY45101339	2009-05-24
☒	Agilent	Power Meter Sensor	E9321A	MY44420359	2009-05-24

)* : Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

2.4.10 Tissue simulating liquids: dielectric properties

The following materials are used for producing the tissue-equivalent materials.

(liquids used for tests described in chapter 2.5. are marked with ☒) :

Ingredients (% of weight)	Frequency (MHz)					
frequency band	☐ 450	☒ 835	☐ 900	☐ 1800	☒ 1900	☐ 2450
Tissue Type	Head	Head	Head	Head	Head	Head
Water	38.56	41.45	40.92	52.64	54.9	62.7
Salt (NaCl)	3.95	1.45	1.48	0.36	0.18	0.5
Sugar	56.32	56.0	56.5	0.0	0.0	0.0
HEC	0.98	1.0	1.0	0.0	0.0	0.0
Bactericide	0.19	0.1	0.1	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	36.8
DGBE	0.0	0.0	0.0	47.0	44.92	0.0

Table 2: Head tissue dielectric properties

Ingredients (% of weight)	Frequency (MHz)					
frequency band	☐ 450	☒ 835	☐ 900	☐ 1800	☒ 1900	☐ 2450
Tissue Type	Body	Body	Body	Body	Body	Body
Water	51.16	52.4	56.0	69.91	69.91	73.2
Salt (NaCl)	1.49	1.40	0.76	0.13	0.13	0.04
Sugar	46.78	45.0	41.76	0.0	0.0	0.0
HEC	0.52	1.0	1.21	0.0	0.0	0.0
Bactericide	0.05	0.1	0.27	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	0.0	29.96	29.96	26.7

Table 3: Body tissue dielectric properties

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Note : Due to their availability body tissue simulating liquids as defined by FCC OET Bulletin 65 Supplement C are generally used for body worn SAR testing according to European standards.

2.4.11 Tissue simulating liquids: parameters

Used Target Frequency [MHz]	Target Head Tissue		Measured Head Tissue		Measured Date
	Permittivity	Conductivity [S/m]	Permittivity	Conductivity [S/m]	
835	41.5	0.90	43	0.913	2010-01-23
835	41.5	0.90	43	0.913	2010-01-23
1900	40.0	1.40	40.6	1.4	2010-01-25
1900	40.0	1.40	40.6	1.39	2010-01-24

Table 4: Parameter of the head tissue simulating liquid

Used Target Frequency [MHz]	Target Body Tissue		Measured Body Tissue		Measured Date
	Permittivity	Conductivity [S/m]	Permittivity	Conductivity [S/m]	
835	55.2	0.97	54.2	0.99	2010-01-25
835	55.2	0.97	53.9	0.984	2010-01-26
1900	53.3	1.52	53.2	1.49	2010-01-27
1900	53.3	1.52	53.2	1.49	2010-01-28

Table 5: Parameter of the body tissue simulating liquid

Note: The dielectric properties have been measured using the contact probe method at 22°C.

2.4.12 Measurement uncertainty evaluation for SAR test

The overall combined measurement uncertainty of the measurement system is $\pm 10.7\%$ ($K=1$).

The expanded uncertainty ($k=2$) is assessed to be $\pm 21.4\%$

This measurement uncertainty budget is suggested by IEEE P1528 and determined by Schmid & Partner Engineering AG. The breakdown of the individual uncertainties is as follows:

Error Sources	Uncertainty Value	Probability Distribution	Divisor	c_i 1g	c_i 10g	Standard Uncertainty 1g	Standard Uncertainty 10g	v_i^2 or v_{eff}
Measurement System								
Probe calibration	$\pm 5.9\%$	Normal	1	1	1	$\pm 5.9\%$	$\pm 5.9\%$	∞
Axial isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9\%$	$\pm 1.9\%$	∞
Hemispherical isotropy	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9\%$	$\pm 3.9\%$	∞
Spatial resolution	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Boundary effects	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Probe linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
System detection limits	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Readout electronics	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Response time	$\pm 0.8\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$	∞
Integration time	$\pm 2.6\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5\%$	$\pm 1.5\%$	∞
RF ambient conditions	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Probe positioner	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$	∞
Probe positioning	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Max. SAR evaluation	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Test Sample Related								
Device positioning	$\pm 2.9\%$	Normal	1	1	1	$\pm 2.9\%$	$\pm 2.9\%$	145
Device holder uncertainty	$\pm 3.6\%$	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	5
Power drift	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	∞
Phantom and Set-up								
Phantom uncertainty	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
Liquid conductivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
Liquid conductivity (meas.)	$\pm 2.5\%$	Normal	1	0.64	0.43	$\pm 1.6\%$	$\pm 1.1\%$	∞
Liquid permittivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
Liquid permittivity (meas.)	$\pm 2.5\%$	Normal	1	0.6	0.49	$\pm 1.5\%$	$\pm 1.2\%$	∞
Combined Uncertainty						$\pm 10.9\%$	$\pm 10.7\%$	387
Expanded Std. Uncertainty						$\pm 21.9\%$	$\pm 21.4\%$	

Table 6: Measurement uncertainties

2.4.13 Measurement uncertainty evaluation for system validation

The overall combined measurement uncertainty of the measurement system is $\pm 9.2\%$ ($K=1$).

The expanded uncertainty ($k=2$) is assessed to be $\pm 18.4\%$

This measurement uncertainty budget is suggested by IEEE P1528 and determined by Schmid & Partner Engineering AG. The breakdown of the individual uncertainties is as follows:

Error Sources	Uncertainty Value	Probability Distribution	Divisor	c_i 1g	c_i 10g	Standard Uncertainty 1g	Standard Uncertainty 10g	v_i^2 or v_{eff}
Measurement System								
Probe calibration	$\pm 5.9\%$	Normal	1	1	1	$\pm 5.9\%$	$\pm 5.9\%$	∞
Axial isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
Hemispherical isotropy	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 0.0\%$	$\pm 0.0\%$	∞
Boundary effects	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Probe linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
System detection limits	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Readout electronics	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Response time	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Integration time	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
RF ambient conditions	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Probe positioner	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$	∞
Probe positioning	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Max. SAR evaluation	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Dipole								
Deviation of experimental dipole	$\pm 5.5\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 3.2\%$	$\pm 3.2\%$	∞
Dipole axis to liquid distance	$\pm 2.0\%$	Rectangular	1	1	1	$\pm 1.2\%$	$\pm 1.2\%$	∞
Power drift	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
Phantom and Set-up								
Phantom uncertainty	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
Liquid conductivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
Liquid conductivity (meas.)	$\pm 2.5\%$	Normal	1	0.64	0.43	$\pm 1.6\%$	$\pm 1.1\%$	∞
Liquid permittivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
Liquid permittivity (meas.)	$\pm 2.5\%$	Normal	1	0.6	0.49	$\pm 1.5\%$	$\pm 1.2\%$	∞
Combined Uncertainty						$\pm 9.5\%$	$\pm 9.2\%$	
Expanded Std. Uncertainty						$\pm 18.9\%$	$\pm 18.4\%$	

Table 7: Measurement uncertainties

2.4.14 System validation

The system validation is performed for verifying the accuracy of the complete measurement system and performance of the software. The system validation is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows validation results for all frequency bands and tissue liquids used during the tests of the test item described in chapter 1.5. (graphic plot(s) see annex 1).


Validation Kit	Frequency	Target SAR _{1g} (250 mW) (+/- 10%)	Target SAR _{10g} (250 mW) (+/- 10%)	Measured SAR _{1g}	Measured SAR _{10g}	Measured date
D835V2 S/N: 4d095	835 MHz head	2.29mW/g	1.5mW/g	2.4mW/g	1.57mW/g	2010-01-23
D835V2 S/N: 4d095	835 MHz body	2.49mW/g	1.62mW/g	2.6mW/g	1.7mW/g	2010-01-25
D835V2 S/N: 4d095	835 MHz head	2.29mW/g	1.5mW/g	2.42mW/g	1.58mW/g	2010-01-23
D835V2 S/N: 4d095	835 MHz body	2.49mW/g	1.62mW/g	2.58mW/g	1.69mW/g	2010-01-26
D1900V2 S/N: 5d091	1900 MHz head	9.6mW/g	5.1mW/g	10.1mW/g	5.15mW/g	2010-01-25
D1900V2 S/N: 5d091	1900 MHz body	10.1mW/g	5.27mW/g	10.2mW/g	5.28mW/g	2010-01-27
D1900V2 S/N: 5d091	1900 MHz head	9.6mW/g	5.1mW/g	10.1mW/g	5.19mW/g	2010-01-24
D1900V2 S/N: 5d091	1900 MHz body	10.1mW/g	5.27mW/g	10.3mW/g	5.33mW/g	2010-01-28

Table 8: Results system validation

2.4.15 Validation procedure

The validation is performed by using a validation dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the validation to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

Validation results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

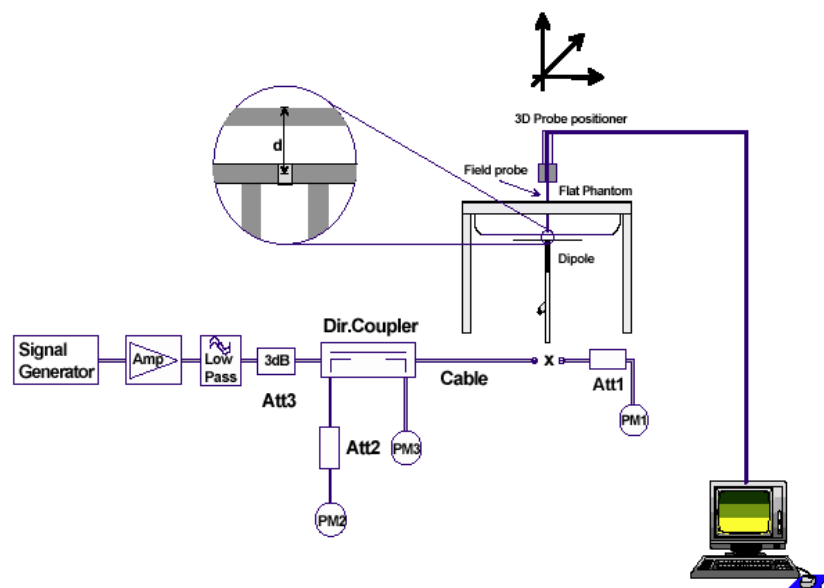

2.5 Test Results

2.5.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200 was used. The output power was measured using an integrated RF connector and attached RF cable. The conducted output power was also checked before and after each SAR measurement. The resulting power values were within a 0.2 dB tolerance of the values shown below.

Note : CMU200 measures GSM peak and average output power for active timeslots.

For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

No. of timeslots	1	2	3	4
Duty Cycle	1 : 8	1 : 4	1 : 2.66	1 : 2
timebased avg. power compared to slotted avg. power	- 9 dB	- 6 dB	- 4.25 dB	- 3 dB

The signalling modes differ as follows :

mode	coding scheme	modulation
GPRS	CS1 to CS4	GMSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

2.5.2 Conducted power measurements

Channel / frequency	modulation	timeslots	slotted avg. power(before test)	timebased avg. power (calculated)	slotted avg. power(after test)
128/ 824.2 MHz	GMSK	1	32.59dBm	23.59dBm	32.58dBm
190/ 836.6MHz	GMSK	1	32.57dBm	23.57dBm	32.59dBm
251/ 848.8 MHz	GMSK	1	32.51dBm	23.51dBm	32.53dBm
128/ 824.2 MHz	GMSK	2	31.59dBm	25.59dBm	31.55dBm
190/ 836.6MHz	GMSK	2	31.52dBm	25.52dBm	31.54dBm
251/ 848.8 MHz	GMSK	2	31.52dBm	25.52dBm	31.48dBm

Table 9: Test results conducted power measurement GSM 850 MHz

Max. RMS output power, WCDMA FDD V / dBm				
		Channel / frequency		
mode		4132/ 826.4 MHz	4183 / 836.4MHz	4233/ 846.6MHz
RMC 12.2 kbit/s	Before Test	22.62	22.30	22.31
	After Test	22.65	22.28	22.34
RMC 64 kbit/s	Before Test	22.54	22.39	22.21
	After Test	22.57	22.35	22.22
RMC 144 kbit/s	Before Test	22.47	22.33	22.19
	After Test	22.46	22.32	22.17
RMC 384 kbit/s	Before Test	22.54	22.33	22.21
	After Test	22.58	22.36	22.25

Table 10: Test results conducted power measurement UMTS (WCDMA) FDD V 850MHz

Channel / frequency	modulation	timeslots	slotted avg. power(before test)	timebased avg. power (calculated)	slotted avg. power(after test)
512 / 1850.2 MHz	GMSK	1	29.58dBm	20.58dBm	29.62dBm
661 / 1880.0 MHz	GMSK	1	29.52dBm	20.52dBm	29.48dBm
810 / 1909.8 MHz	GMSK	1	29.61dBm	20.61dBm	29.63dBm
512 / 1850.2 MHz	GMSK	2	29.52dBm	23.52dBm	29.56dBm
661 / 1880.0 MHz	GMSK	2	29.41dBm	23.41dBm	29.43dBm
810 / 1909.8 MHz	GMSK	2	29.48dBm	29.48dBm	29.47dBm

Table 11: Test results conducted power measurement PCS 1900 MHz

Max. RMS output power, WCDMA FDD II/ dBm				
		Channel / frequency		
mode		9262/ 1852.4MHz	9400 / 1880MHz	9538/ 1907.6MHz
RMC 12.2 kbit/s	Before Test	22.33	22.18	22.21
	After Test	22.32	22.22	22.25
RMC 64 kbit/s	Before Test	22.41	22.20	22.47
	After Test	22.44	22.23	22.46
RMC 144 kbit/s	Before Test	22.14	22.58	22.24
	After Test	22.13	22.55	22.25
RMC 384 kbit/s	Before Test	22.29	22.21	22.15
	After Test	22.32	22.22	22.14

Table 12: Test results conducted power measurement UMTS (WCDMA) FDD II 1900MHz

2.5.3 Justification of SAR measurements in GSM mode

SAR measurements were performed in GPRS mode with 2 active timeslots because highest timebased averaged output power was calculated for that configuration.

For comparison an additional delta measurement was performed with 1 timeslot in speech mode.

2.5.4 Multiple Transmitter Information

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to KDB 648474.

important abbreviations :

SPLSR : Antenna pair SAR to Peak Location Separation Ratio ($SAR_x + SAR_y$)/ d_{xy}

P_{ref} : 12 mW at 2.4 GHz

a) head position

Tx No.	Communcation system and frequency band	P_{avg} (mW)	single SAR (W/kg) (see ch. 2.6)	remarks
1a	GSM850	250	0.732	
1b	WCDMA FDD V	250	0.735	routine evaluation
1c	GSM1900	125	0.718	
1d	WCDMA FDD II	250	1.09	routine evaluation
2	Bluetooth 2450 MHz	5	≤ 0	$P_2 < P_{ref}$
Sum of all 1g-SAR values			n/a	

Table 13: Communication systems and SAR values in head position

antenna pair (x,y)	antenna distance d_{xy} (cm)	L_{xy} (cm)	$SPLSR_{xy}$	sim.-Tx SAR	remarks
(1a,2)	5.5 cm	n/a	0.13	N	$SPLSR_{xy} < 0.3$
(1b,2)	5.5 cm	n/a	0.13	N	$SPLSR_{xy} < 0.3$
(1c,2)	5.5 cm	n/a	0.13	N	$SPLSR_{xy} < 0.3$
(1d,2)	5.5 cm	n/a	0.20	N	$SPLSR_{xy} < 0.3$

Table 14: Antenna distances and SPLSR evaluation in head position

a) body position

Tx No.	Communication system and frequency band	P_{avg} (mW)	single SAR (W/kg) (see ch. 2.6)	remarks
1a	GSM850	250	0.813	
1b	WCDMA FDD V	250	0.516	routine evaluation
1c	GSM1900	125	0.583	
1d	WCDMA FDD II	250	0.395	routine evaluation
2	Bluetooth 2450 MHz	5	≤ 0	$P_2 < P_{ref}$
Sum of all 1g-SAR values			n/a	

Table 15: Communication systems and SAR values in body position

antenna pair (x,y)	antenna distance d_{xy} (cm)	L_{xy} (cm)	$SPLSR_{xy}$	sim.-Tx SAR	remarks
(1a,2)	5.5 cm	n/a	0.15	N	$SPLSR_{xy} < 0.3$
(1b,2)	5.5 cm	n/a	0.09	N	$SPLSR_{xy} < 0.3$
(1c,2)	5.5 cm	n/a	0.10	N	$SPLSR_{xy} < 0.3$
(1d,2)	5.5 cm	n/a	0.07	N	$SPLSR_{xy} < 0.3$

Table 16: Antenna distances and SPLSR evaluation in body position

In simple word:

The distance of the GSM antenna at the bottom end of the DUT to the Bluetooth antenna at the middle of the DUT is about 5.5 cm and the sum of the SAR values is < 1.6 W/kg.

No simultaneous transmission SAR evaluation is necessary with GSM.

The Bluetooth output power is below P_{ref} . So standalone SAR for BT is not necessary.

2.6 Test results (Head and Body SAR)

GSM850

The table contains the measured SAR values averaged over a mass of 1 g					
Channel / frequency	Position	Left hand position	Right hand position	Limit	Liquid temperature
U3100-5					
190 / 836.6 MHz	cheek	0.631 W/kg	0.671 W/kg	1.6 W/kg	21.5/21.5 °C
190 / 836.6 MHz	tilted 15°	0.385 W/kg	0.425 W/kg	1.6 W/kg	21.5/21.5 °C
251/ 848.8 MHz	cheek	--- W/kg	0.637 W/kg	1.6 W/kg	---/21.5 °C
128 / 824.2 MHz	cheek	--- W/kg	0.732 W/kg	1.6 W/kg	---/21.5 °C

Table 17: Test results (Head SAR GSM850 MHz)

The table contains the measured SAR values averaged over a mass of 1 g				
Channel / frequency	Position	Body worn	Limit	Liquid temperature
U3100-5 GPRS, 2 Time Slots				
190 / 836.6 MHz	front	0.602 W/kg	1.6 W/kg	21.5 °C
190 / 836.6 MHz	rear	0.747 W/kg	1.6 W/kg	21.5 °C
251/ 848.8 MHz	rear	0.719 W/kg	1.6 W/kg	21.5 °C
128 / 824.2 MHz	rear	0.813 W/kg	1.6 W/kg	21.5 °C
U3100-5 with Headset				
128 / 824.2 MHz	rear	0.362 W/kg	1.6 W/kg	21.5 °C
U3100-5 ,with Bluetooth Headset				
128 / 824.2 MHz	rear	0.571 W/kg	1.6 W/kg	21.5 °C

Table 18: Test results (Body SAR GSM850 MHz)

Note: The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

Tests in body position were performed with 15 mm air gap between DUT and SAM to simulate the use of a non-metallic belt-clip or holster.

The addition body test was performed at worst case with 1 time slot in uplink.

UMTS (WCDMA) FDD V

The table contains the measured SAR values averaged over a mass of 1 g					
Channel / frequency	Position	Left hand position	Right hand position	Limit	Liquid temperature
U3100-5					
4183 / 836.6 MHz	cheek	0.55 W/kg	0.645 W/kg	1.6 W/kg	21.5/21.5 °C
4183 / 836.6 MHz	tilted 15°	0.335 W/kg	0.357 W/kg	1.6 W/kg	21.5/21.5 °C
4233 / 846.6 MHz	cheek	--- W/kg	0.66 W/kg	1.6 W/kg	---/21.5 °C
4132 / 826.4 MHz	cheek	--- W/kg	0.735 W/kg	1.6 W/kg	---/21.5 °C

Table 19: Test results (Head SAR UMTS (WCDMA) FDD V 850MHz)

The table contains the measured SAR values averaged over a mass of 1 g				
Channel / frequency	Position	Body worn	Limit	Liquid temperature
U3100-5				
4183 / 836.6 MHz	front	0.383 W/kg	1.6 W/kg	21.5 °C
4183 / 836.6 MHz	rear	0.502 W/kg	1.6 W/kg	21.5 °C
4233 / 846.6 MHz	rear	0.45 W/kg	1.6 W/kg	21.5 °C
4132 / 826.4 MHz	rear	0.516 W/kg	1.6 W/kg	21.5 °C
U3100-5 with Headset				
4132 / 826.4 MHz	rear	0.341 W/kg	1.6 W/kg	21.5 °C
U3100-5 ,with Bluetooth Headset				
4132 / 826.4 MHz	rear	0.514 W/kg	1.6 W/kg	21.5 °C

Table 20: Test results (Body SAR UMTS (WCDMA) FDD V 850MHz)

Note: The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

Tests in body position were performed with 15 mm air gap between DUT and SAM to simulate the use of a non-metallic belt-clip or holster.

PCS 1900

The table contains the measured SAR values averaged over a mass of 1 g					
Channel / frequency	Position	Left hand position	Right hand position	Limit	Liquid temperature
U3100-5					
661 / 1880.0 MHz	cheek	0.594 W/kg	0.657 W/kg	1.6 W/kg	21.5/21.5 °C
661 / 1880.0 MHz	tilted 15°	0.266 W/kg	0.202 W/kg	1.6 W/kg	21.5/21.5 °C
810 / 1909.8 MHz	cheek	--- W/kg	0.564 W/kg	1.6 W/kg	---/21.5 °C
512 / 1850.2 MHz	cheek	--- W/kg	0.718 W/kg	1.6 W/kg	---/21.5 °C

Table 21: Test results (Head SAR PCS 1900 MHz)

The table contains the measured SAR values averaged over a mass of 1 g				
Channel / frequency	Position	Body worn	Limit	Liquid temperature
U3100-5 GPRS, 2 Time Slots				
661 / 1880.0 MHz	front 2TS	0.362 W/kg	1.6 W/kg	21.5 °C
661 / 1880.0 MHz	rear 2TS	0.441 W/kg	1.6 W/kg	21.5 °C
810 / 1909.8 MHz	rear 2TS	0.375 W/kg	1.6 W/kg	21.5 °C
512 / 1850.2 MHz	rear 2TS	0.583 W/kg	1.6 W/kg	21.5 °C
U3100-5 Speech mode, with Headset				
512 / 1850.2 MHz	rear	0.273 W/kg	1.6 W/kg	21.5 °C
U3100-5 Speech mode, with Bluetooth Headset				
512 / 1850.2 MHz	rear 2TS	0.301 W/kg	1.6 W/kg	21.5 °C

Table 22: Test results (Body SAR PCS 1900 MHz)

Note: The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

Tests in body position were performed with 15 mm air gap between DUT and SAM to simulate the use of a non-metallic belt-clip or holster.

The addition body test was performed at worst case with 1 time slot in uplink.

UMTS (WCDAM) FDD II

The table contains the measured SAR values averaged over a mass of 1 g					
Channel / frequency	Position	Left hand position	Right hand position	Limit	Liquid temperature
U3100-5					
9400 / 1880 MHz	cheek	0.841 W/kg	0.895 W/kg	1.6 W/kg	21.5/21.5 °C
9400 / 1880 MHz	tilted 15°	0.409 W/kg	0.316 W/kg	1.6 W/kg	21.5/21.5 °C
9538 / 1907.6 MHz	cheek	--- W/kg	0.872 W/kg	1.6 W/kg	---/21.5 °C
9262 / 1852.4 MHz	cheek	--- W/kg	1.09 W/kg	1.6 W/kg	---/21.5 °C

Table 23: Test results (Head SAR UMTS (WCDMA) FDD II 1900MHz)

The table contains the measured SAR values averaged over a mass of 1 g				
Channel / frequency	Position	Body worn	Limit	Liquid temperature
U3100-5				
9400 / 1880 MHz	front	0.303 W/kg	1.6 W/kg	21.5 °C
9400 / 1880 MHz	rear	0.362 W/kg	1.6 W/kg	21.5 °C
9538 / 1907.6 MHz	rear	0.297 W/kg	1.6 W/kg	21.5 °C
9262 / 1852.4 MHz	rear	0.381 W/kg	1.6 W/kg	21.5 °C
U3100-5 with Headset				
9262 / 1852.4 MHz	rear	0.336 W/kg	1.6 W/kg	21.5 °C
U3100-5 ,with Bluetooth Headset				
9262 / 1852.4 MHz	rear	0.395 W/kg	1.6 W/kg	21.5 °C

Table 24: Test results (Body SAR UMTS (WCDMA) FDD II 1900MHz)

Note: The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

Tests in body position were performed with 15 mm air gap between DUT and SAM to simulate the use of a non-metallic belt-clip or holster.

2.6.1 General description of test procedures

The DUT is tested using a CMU 200 communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power.

Test positions as described in the tables above are in accordance with the specified test standard.

Tests in body position are performed with the maximum number of timeslots in uplink.

Tests in head position are performed in voice mode with 1 timeslot unless GPRS/EGPRS function allows parallel voice and data traffic on 2 or more timeslots (see chapter 1.5 for details).

Conducted output power was measured using an integrated RF connector and attached RF cable.

Annex 1 System performance verification

Date/Time: 2010-01-23 03:02:26

SystemPerformanceCheck-D835 head**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d059**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.913$ mho/m; $\epsilon_r = 43$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM2; Type: SAM; Serial: TP-1474

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

d=15mm, Pin=250mW/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.5 mW/g


d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.1 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 3.49 W/kg

SAR(1 g) = 2.4 mW/g; SAR(10 g) = 1.57 mW/g

Maximum value of SAR (measured) = 2.6 mW/g

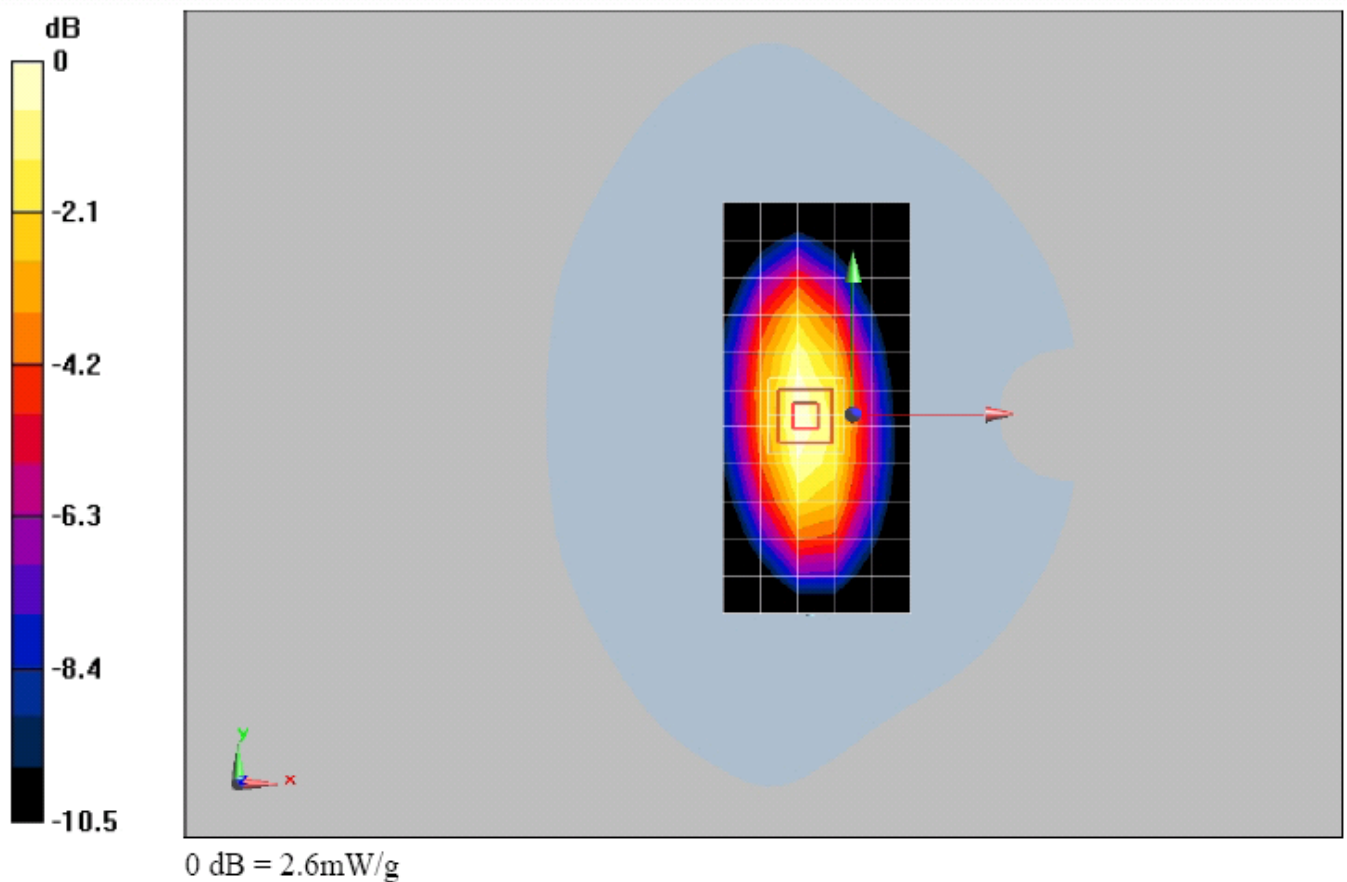**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

SystemPerformanceCheck-D835 body**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d059**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.97, 5.97, 5.97); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM1; Type: SAM; Serial: TP-1475

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

d=15mm, Pin=250mW/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.61 mW/g


d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.9 V/m; Power Drift = 0.077 dB

Peak SAR (extrapolated) = 3.8 W/kg

SAR(1 g) = 2.6 mW/g; SAR(10 g) = 1.7 mW/g

Maximum value of SAR (measured) = 2.82 mW/g

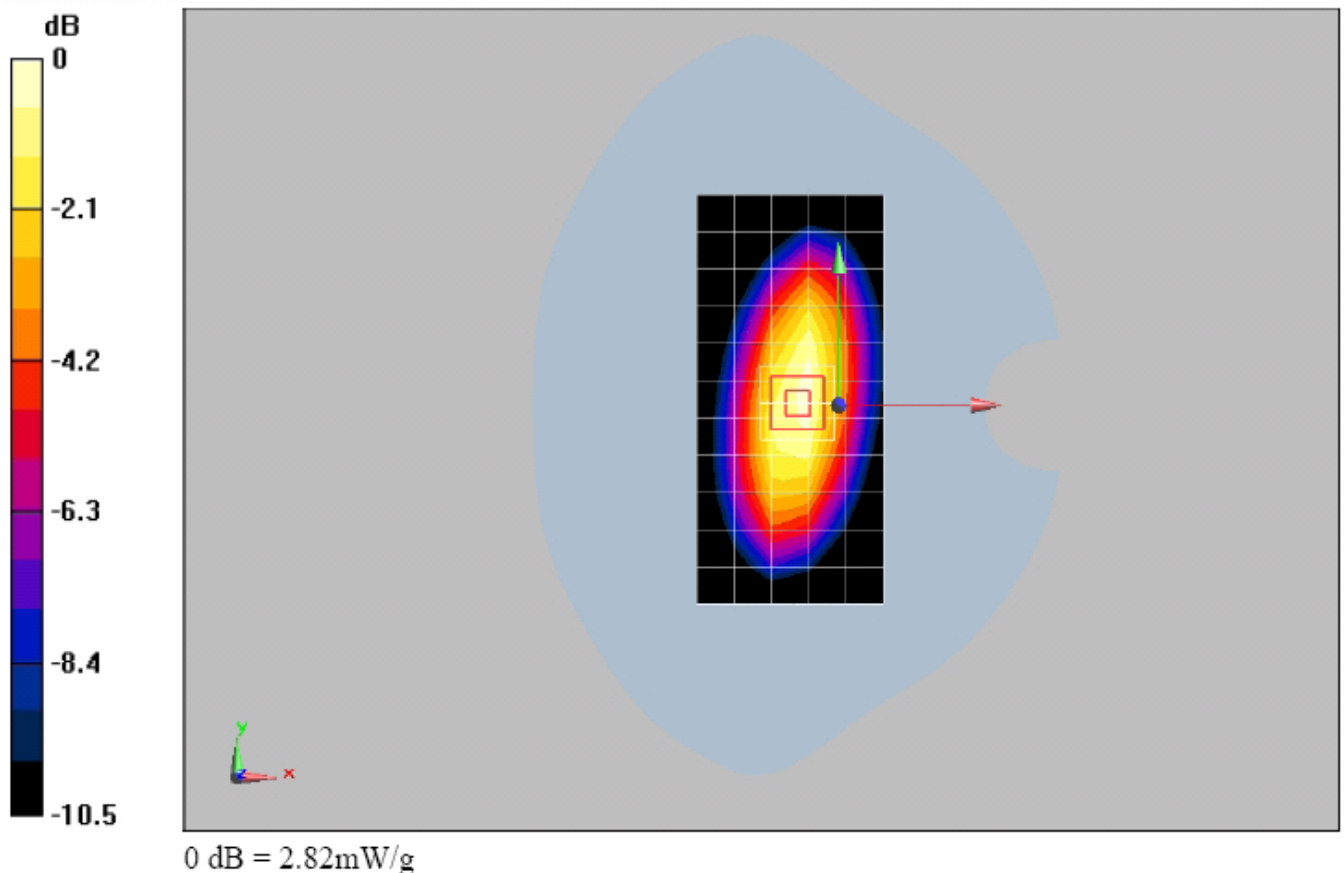**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

SystemPerformanceCheck-D835 head**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d059**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.913$ mho/m; $\epsilon_r = 43$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM2; Type: SAM; Serial: TP-1474

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

d=15mm, Pin=250mW/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.51 mW/g


d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.1 V/m; Power Drift = 0.097 dB

Peak SAR (extrapolated) = 3.52 W/kg

SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.58 mW/g

Maximum value of SAR (measured) = 2.62 mW/g

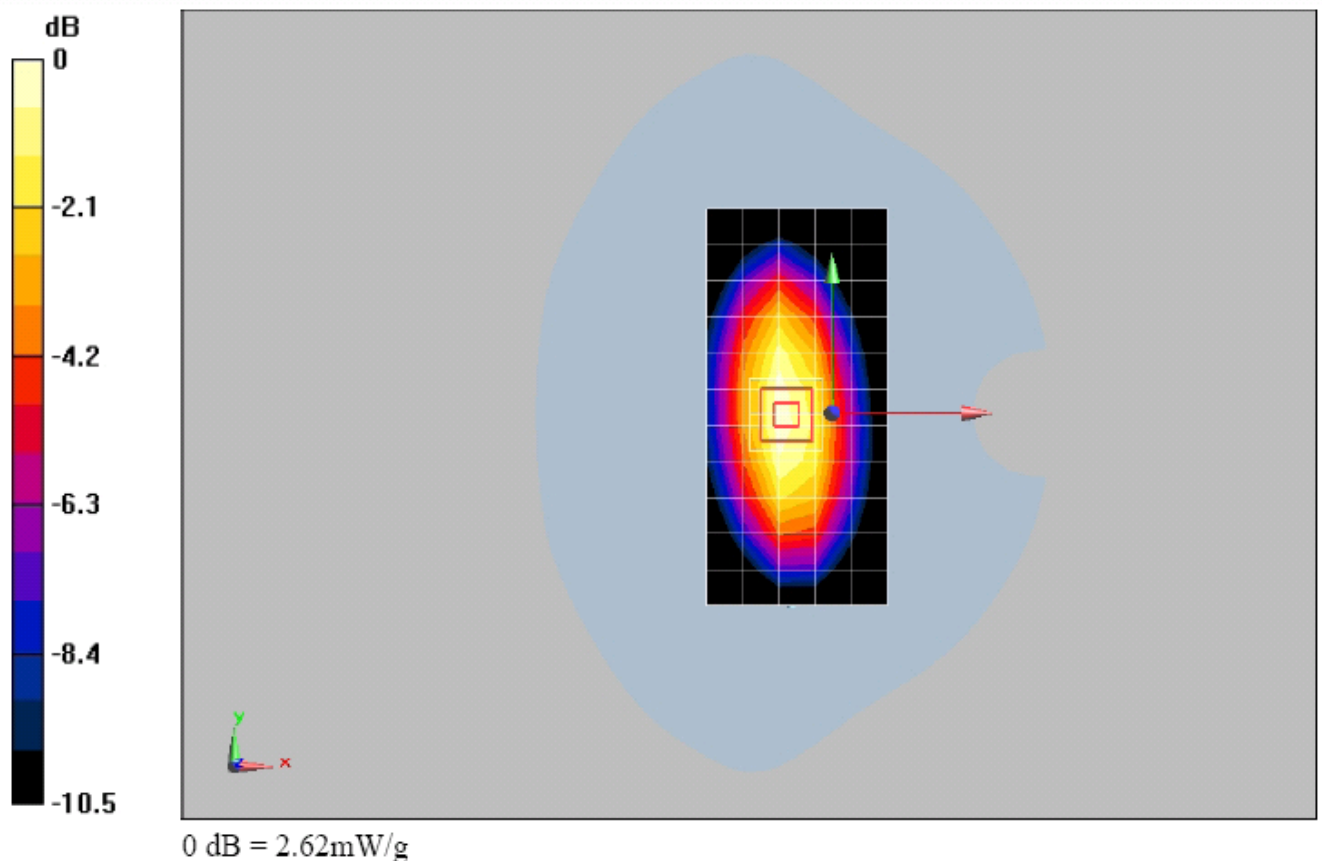**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

SystemPerformanceCheck-D835 body**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d059**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.97, 5.97, 5.97); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM1; Type: SAM; Serial: TP-1475

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

d=15mm, Pin=250mW/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.63 mW/g


d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.1 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 3.77 W/kg

SAR(1 g) = 2.58 mW/g; SAR(10 g) = 1.69 mW/g

Maximum value of SAR (measured) = 2.79 mW/g

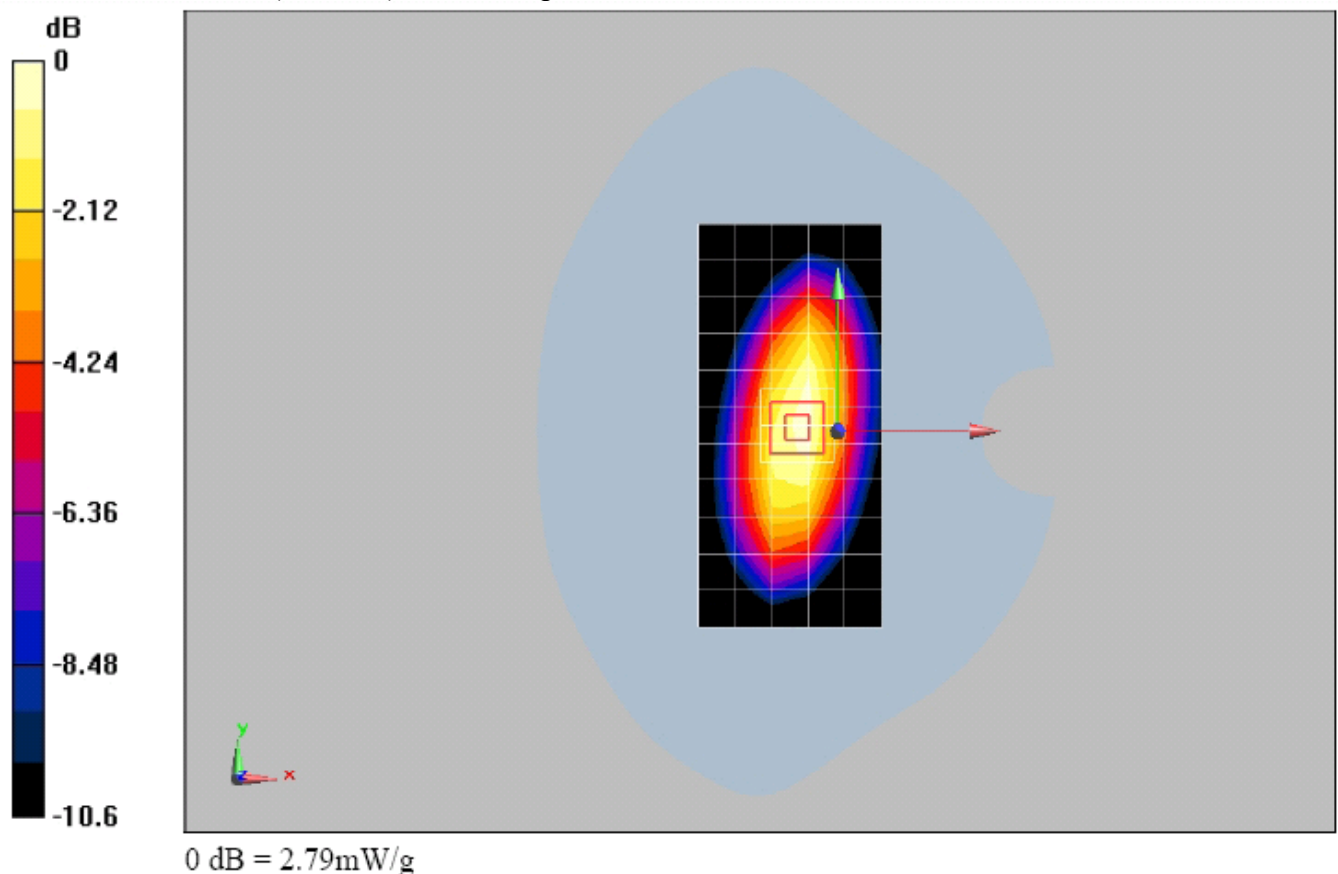**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

SystemPerformanceCheck-D1900 head**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d091**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM2; Type: SAM; Serial: TP-1474

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.2 V/m; Power Drift = 0.00873 dB

Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.15 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

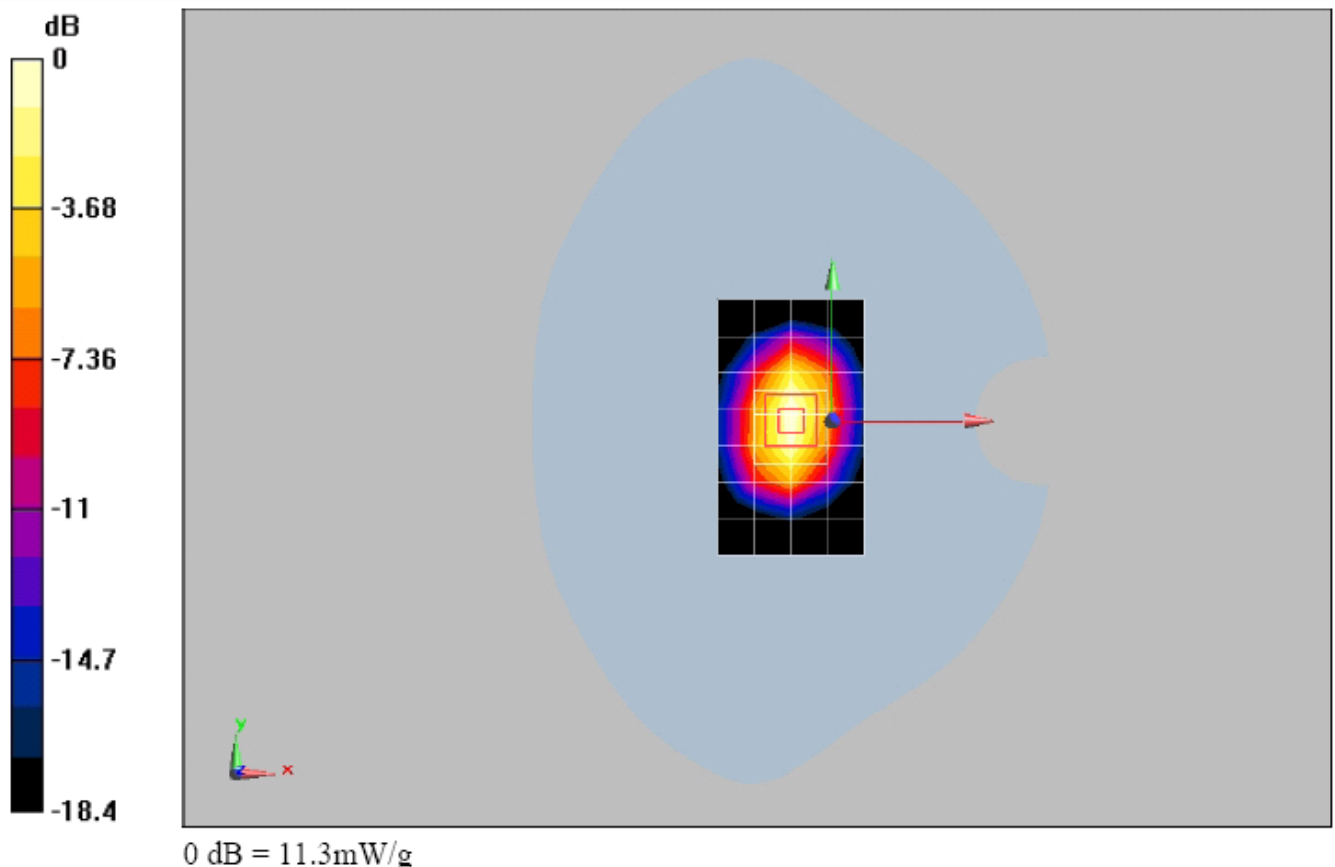**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

SystemPerformanceCheck-D1900 body**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d091**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.62, 4.62, 4.62); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM1; Type: SAM; Serial: TP-1475

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.7 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.28 mW/g

Maximum value of SAR (measured) = 11.5 mW/g

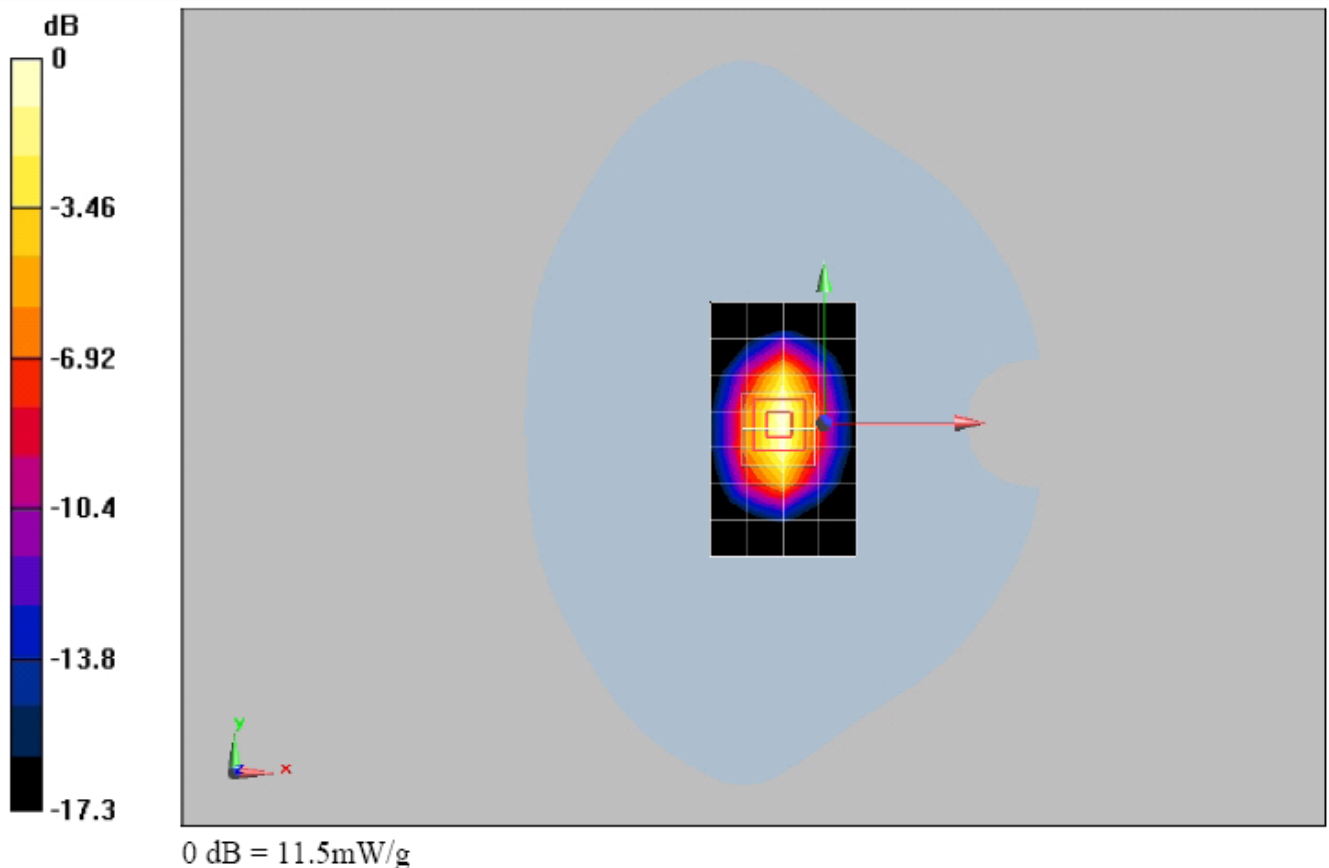**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

SystemPerformanceCheck-D1900 head**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d091**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM2; Type: SAM; Serial: TP-1474

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.1 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.6 V/m; Power Drift = -0.00977 dB

Peak SAR (extrapolated) = 19.1 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.19 mW/g

Maximum value of SAR (measured) = 11.4 mW/g

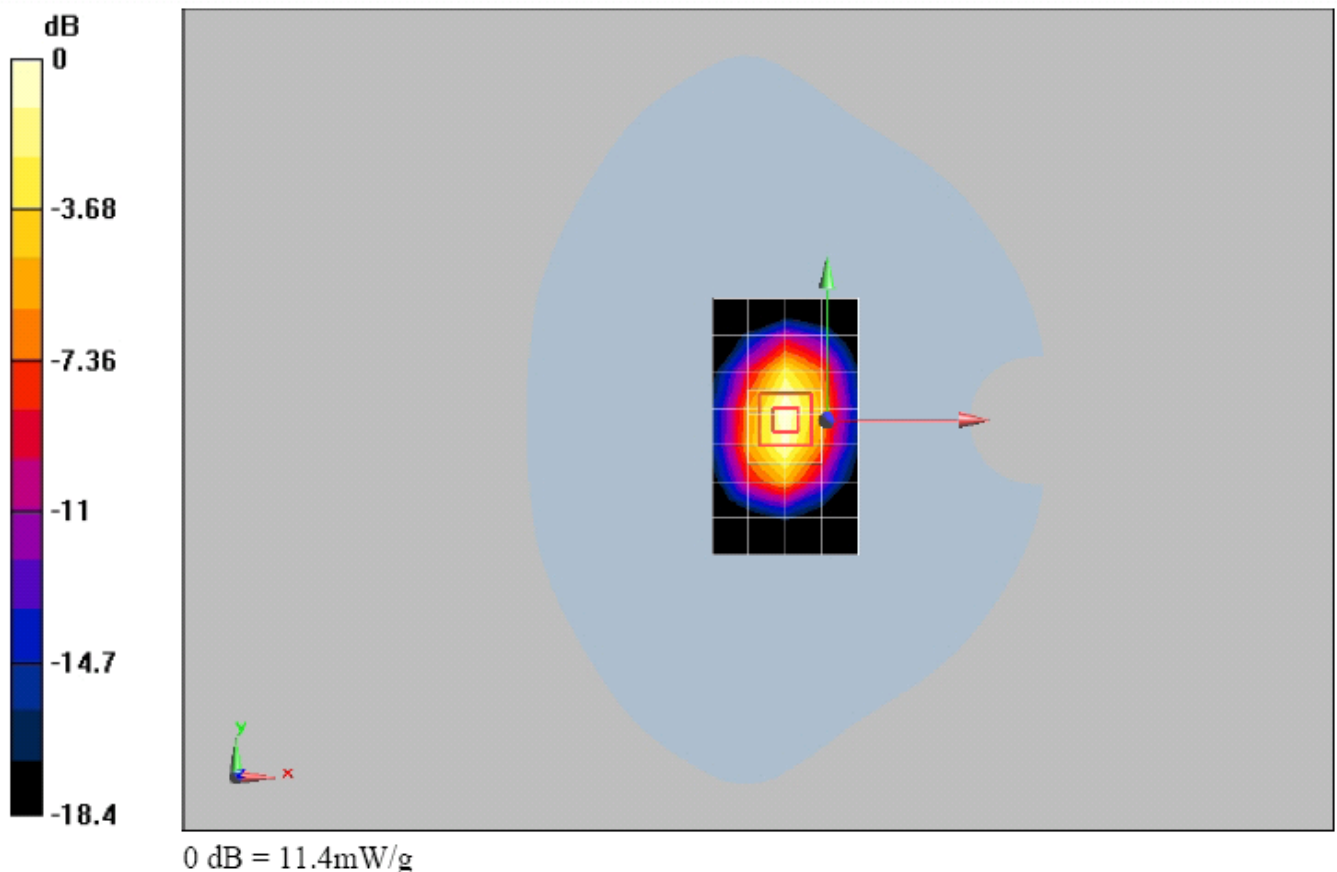**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

SystemPerformanceCheck-D1900 body**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d091**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.62, 4.62, 4.62); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM1; Type: SAM; Serial: TP-1475

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.1 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.3 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 18.7 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.33 mW/g

Maximum value of SAR (measured) = 11.7 mW/g

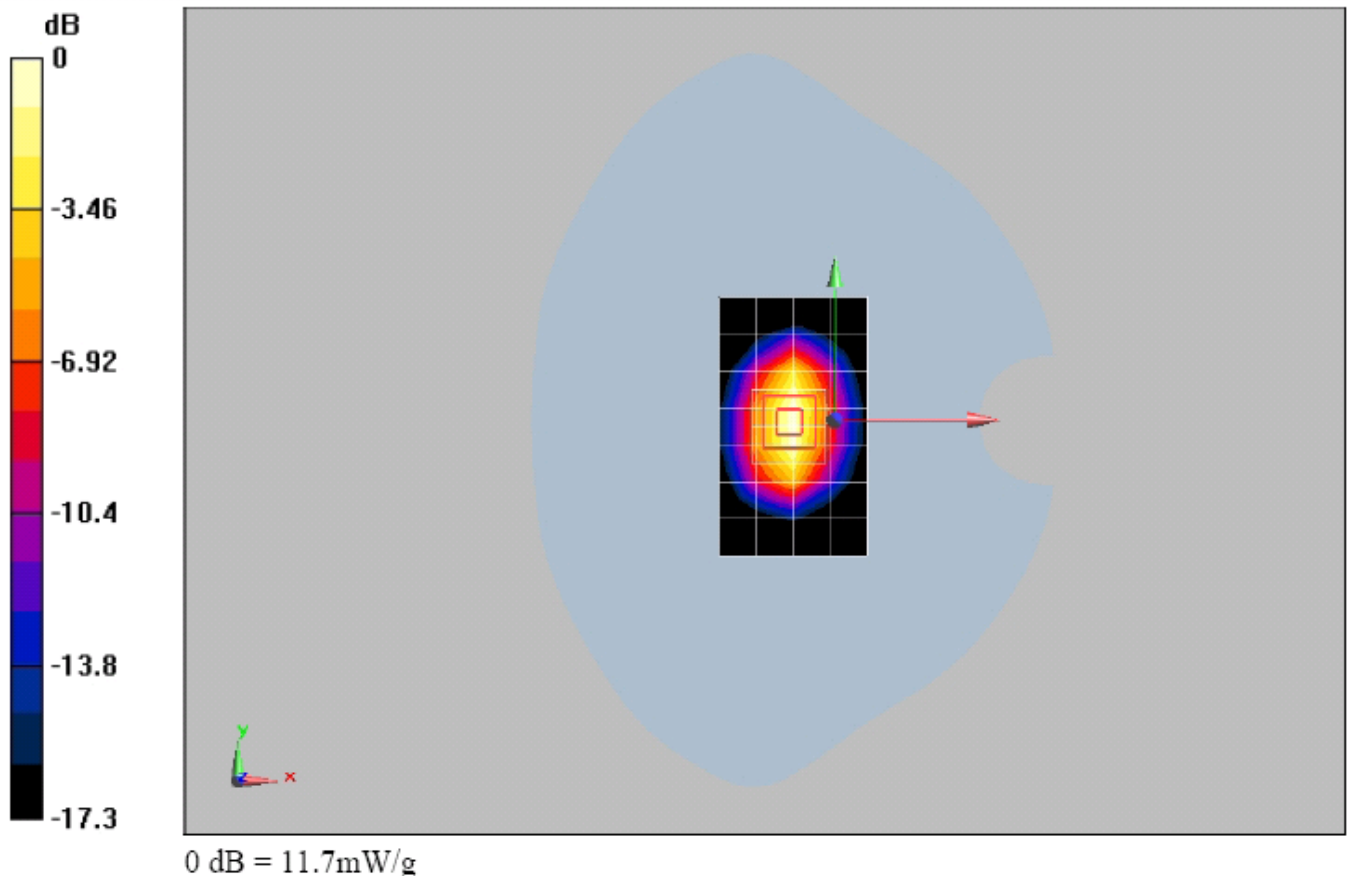**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

Test report no.: SYBH(Z-SAR)212012010

Annex 2 Measurement results (printout from DASY TM)**Remark: results of conducted power measurements: see chapter 2.5/2.6 (if applicable)****Annex 2.1 GSM 850 MHz head**

Date/Time: 2010-01-23 03:56:50

P1528_OET65_EN62209-LeftHandSide touched-GSM850**DUT: U3100-5**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 43$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.650 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.33 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.849 W/kg

SAR(1 g) = 0.631 mW/g; SAR(10 g) = 0.443 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.673 mW/g

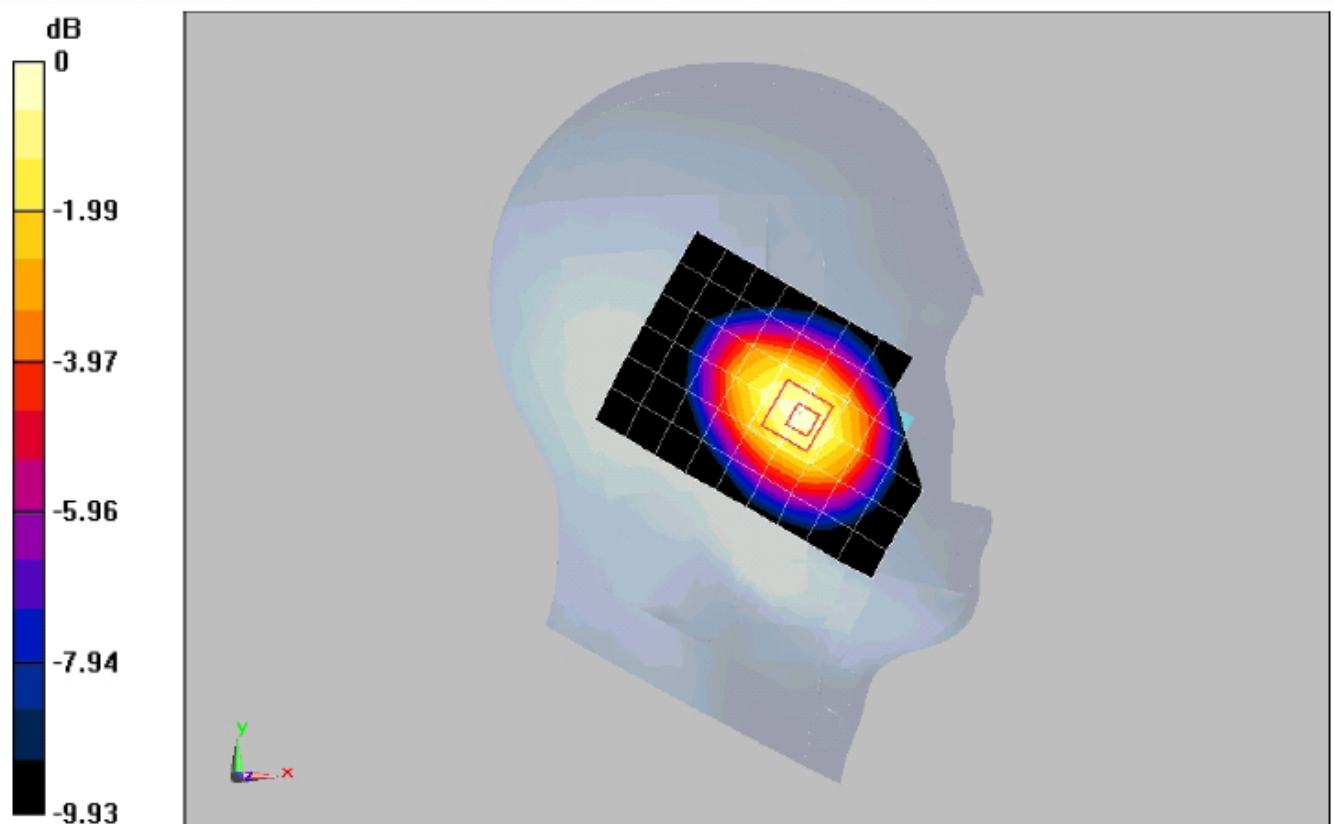

0 dB = 0.673mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209-LeftHandSide tilted 15°- GSM850**DUT: U3100-5**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 43$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.408 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = 0.00101 dB

Peak SAR (extrapolated) = 0.492 W/kg

SAR(1 g) = 0.385 mW/g; SAR(10 g) = 0.279 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.406 mW/g

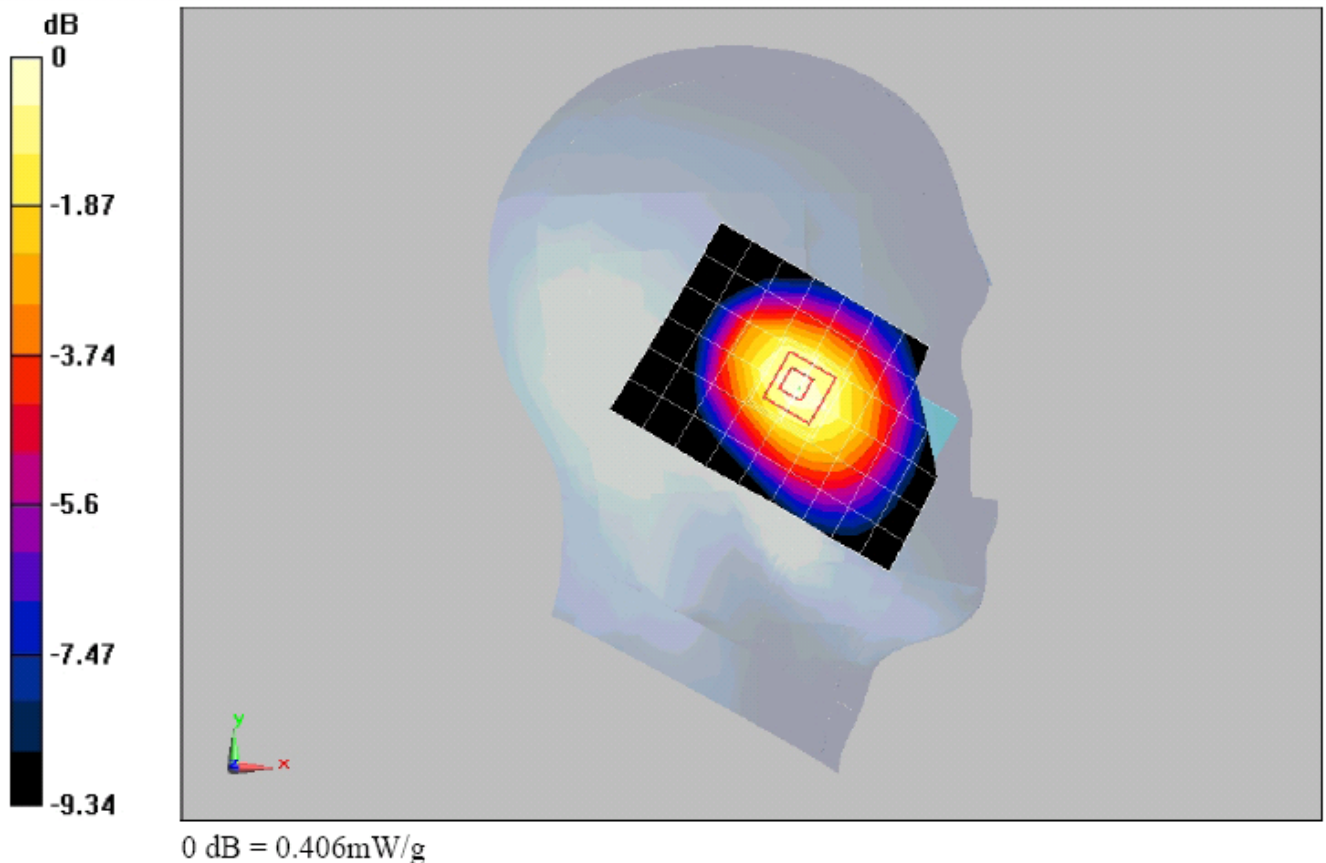**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209-RightHandSide touched-GSM850**DUT: U3100-5**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 43$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.682 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.84 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.671 mW/g; SAR(10 g) = 0.476 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.726 mW/g

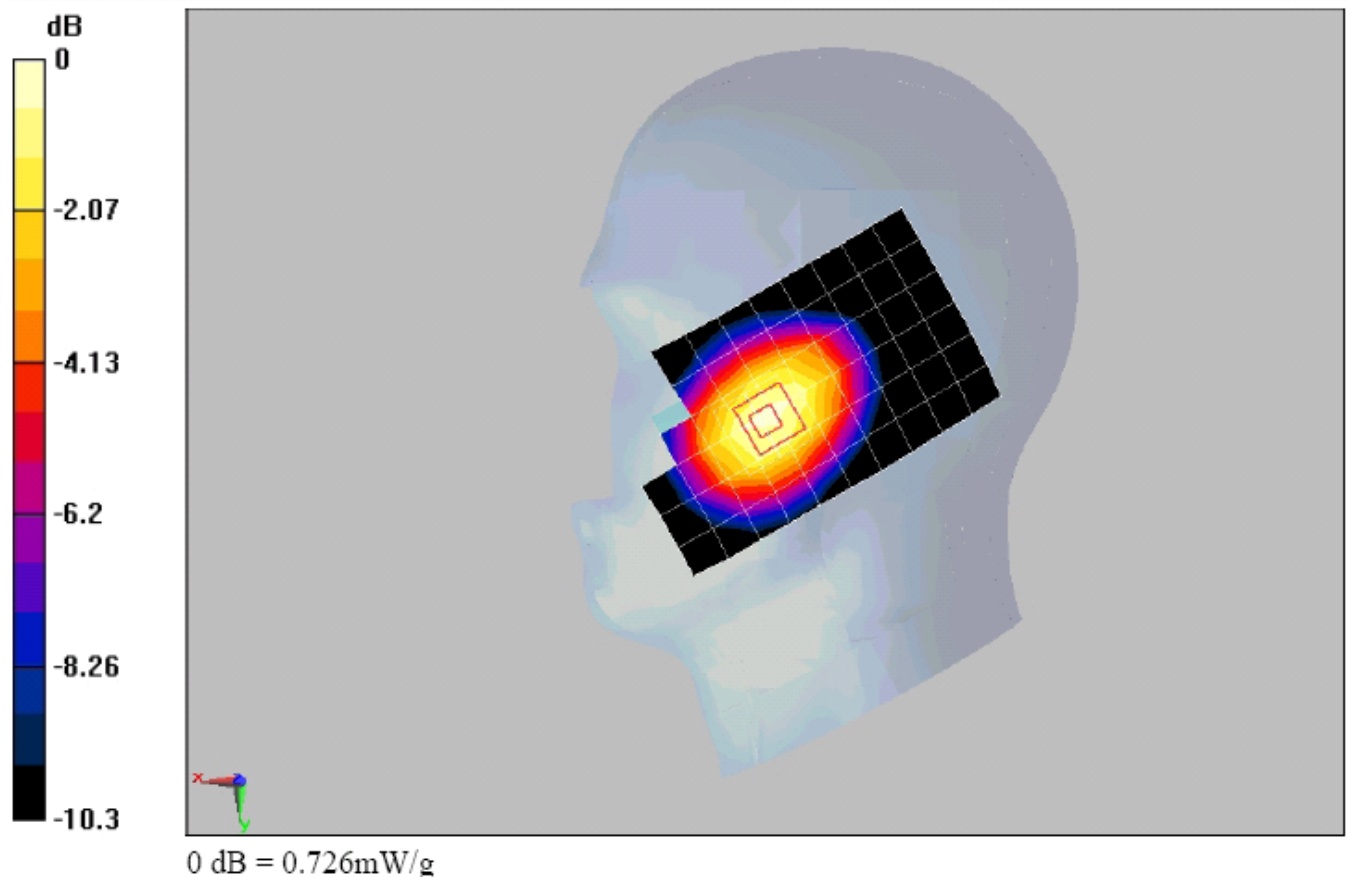**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209-RightHandSide tilted 15°-GSM850**DUT: U3100-5**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 43$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.452 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.425 mW/g; SAR(10 g) = 0.308 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.450 mW/g

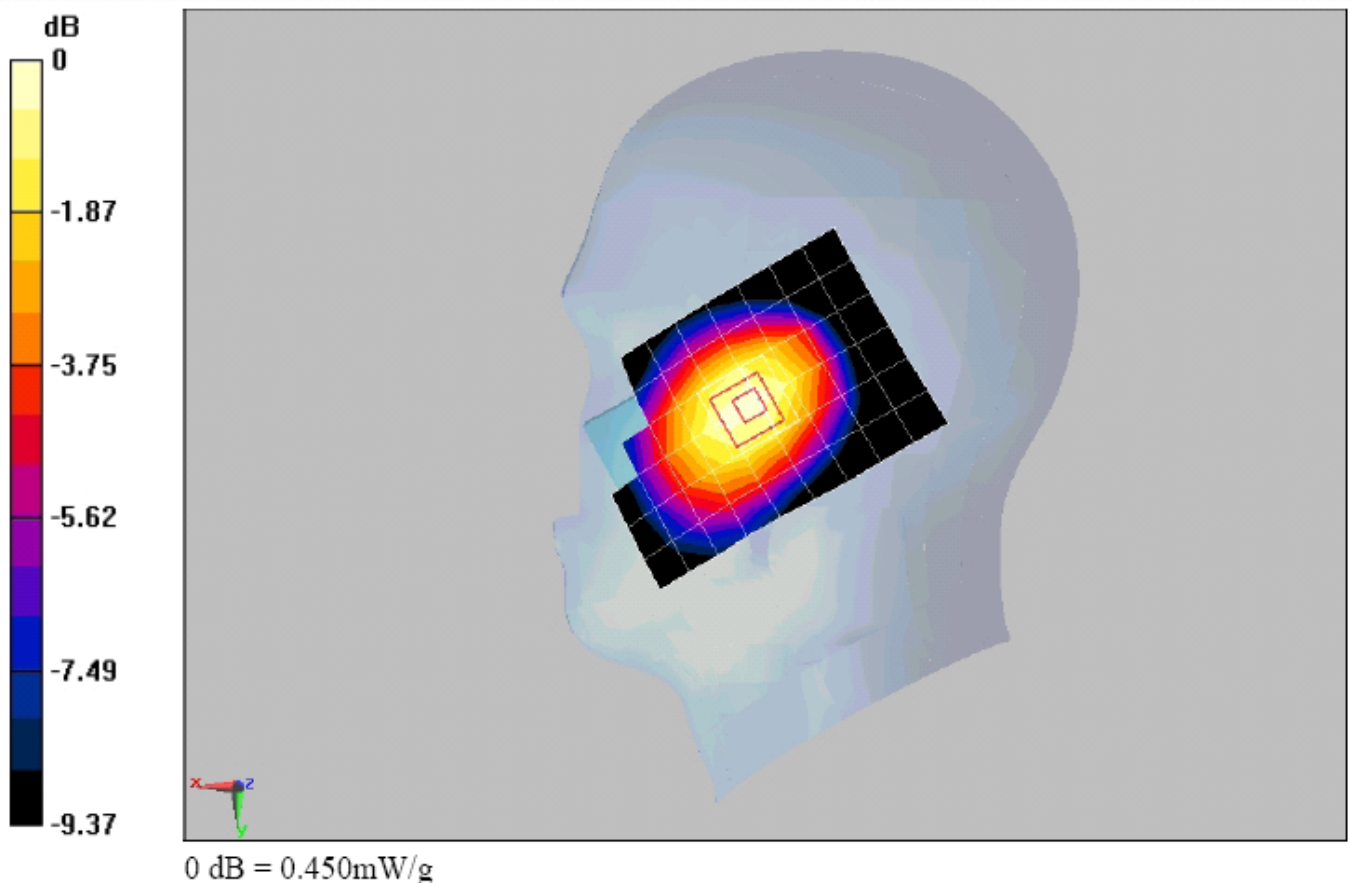**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- RightHandSide touched –GSM850**DUT: U3100-5**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.927$ mho/m; $\epsilon_r = 42.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.646 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.41 V/m; Power Drift = 0.092 dB

Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.637 mW/g; SAR(10 g) = 0.450 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.682 mW/g

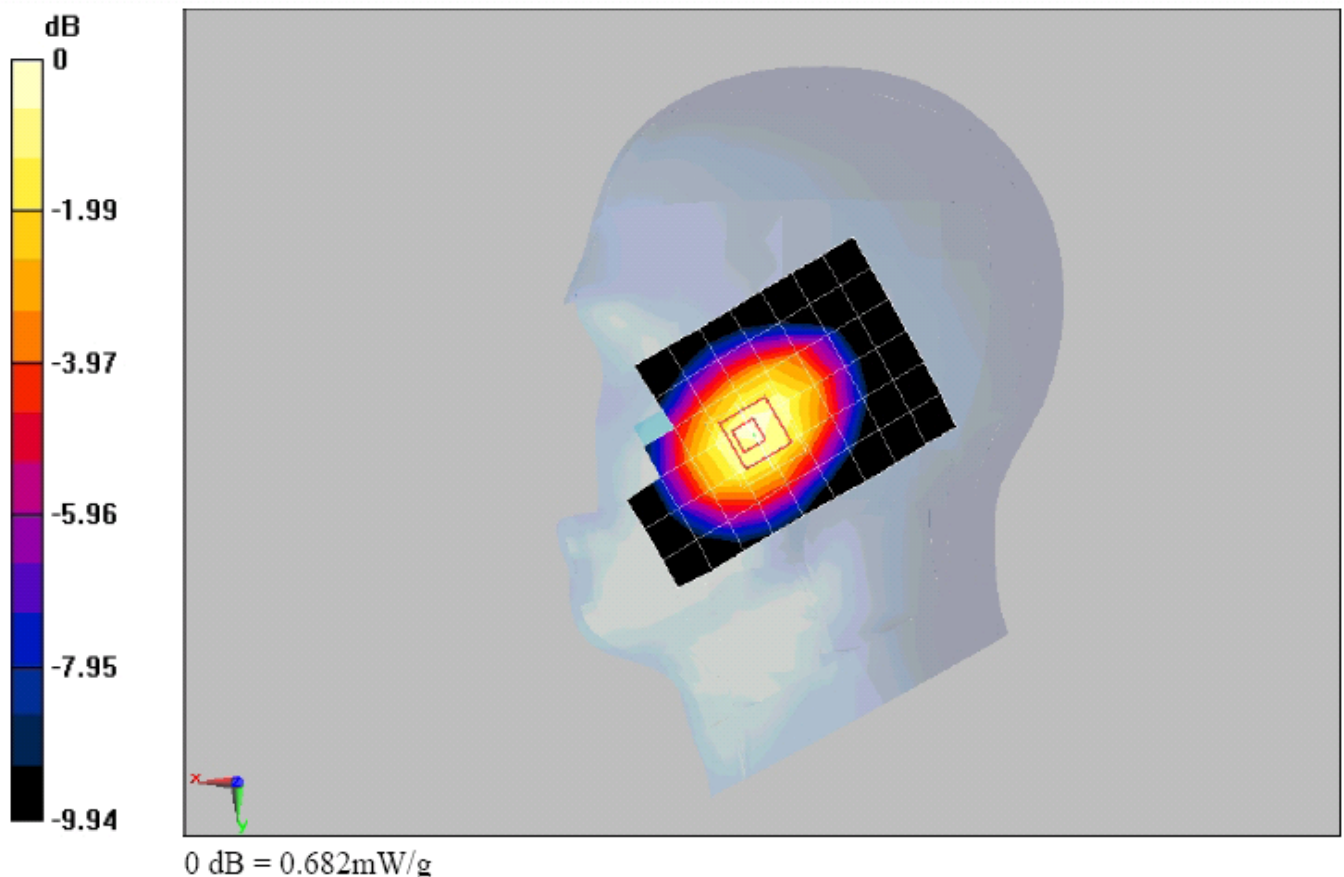**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- RightHandSide touched –GSM850**DUT: U3100-5**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 43.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.733 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.83 V/m; Power Drift = 0.062 dB

Peak SAR (extrapolated) = 0.957 W/kg

SAR(1 g) = 0.732 mW/g; SAR(10 g) = 0.519 mW/g

Maximum value of SAR (measured) = 0.793 mW/g

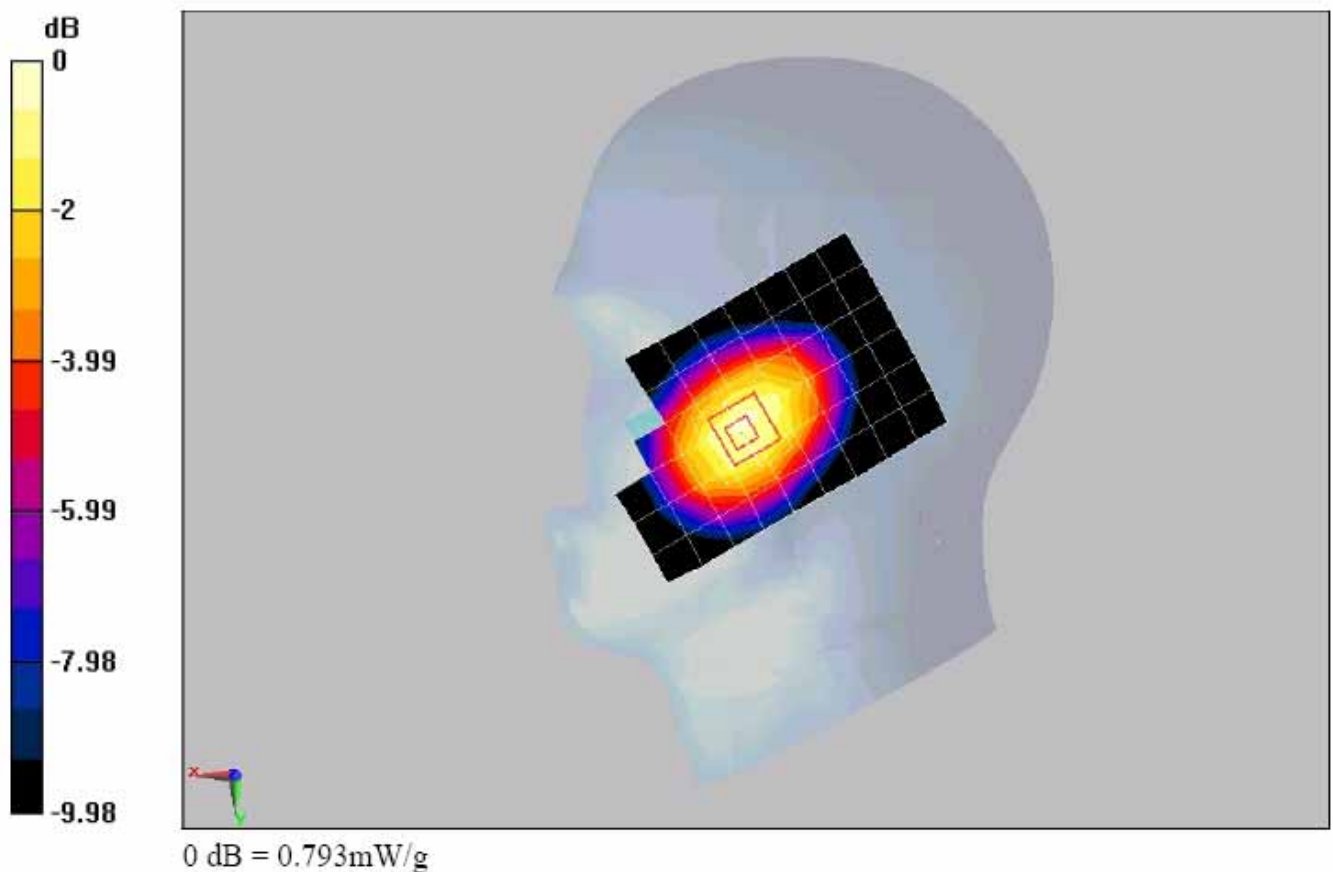**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

Annex 2.2 GSM 850 MHz body

Date/Time: 2010-01-25 22:08:29

P1528_OET65_EN62209- GSM850 GPRS 2TS towards phantom**DUT: U3100-5**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.992$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.97, 5.97, 5.97); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.606 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.4 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.785 W/kg

SAR(1 g) = 0.602 mW/g; SAR(10 g) = 0.436 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.638 mW/g

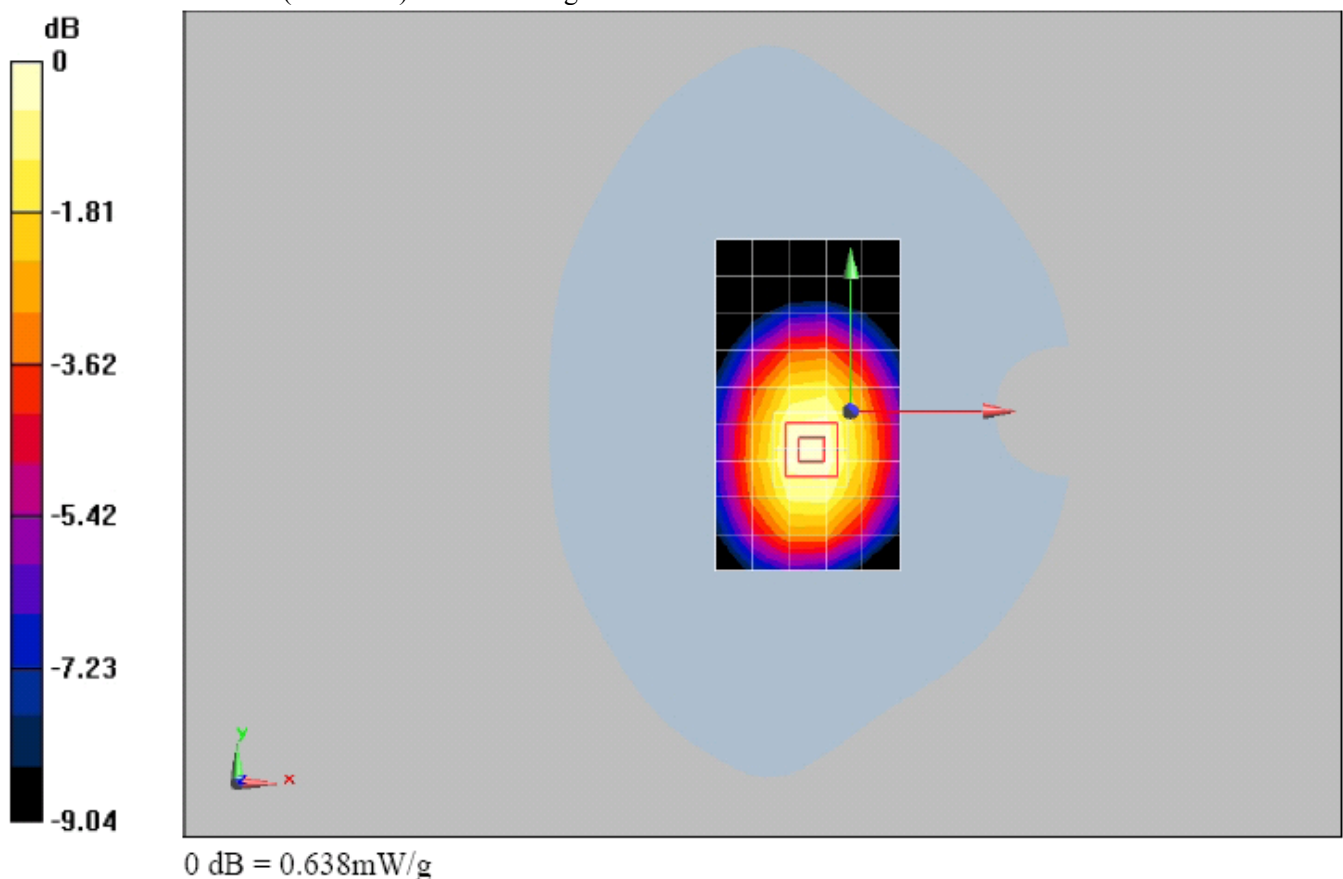**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- GSM850 GPRS 2TS towards ground**DUT: U3100-5**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.992$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.97, 5.97, 5.97); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.795 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.7 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.985 W/kg

SAR(1 g) = 0.747 mW/g; SAR(10 g) = 0.530 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.799 mW/g

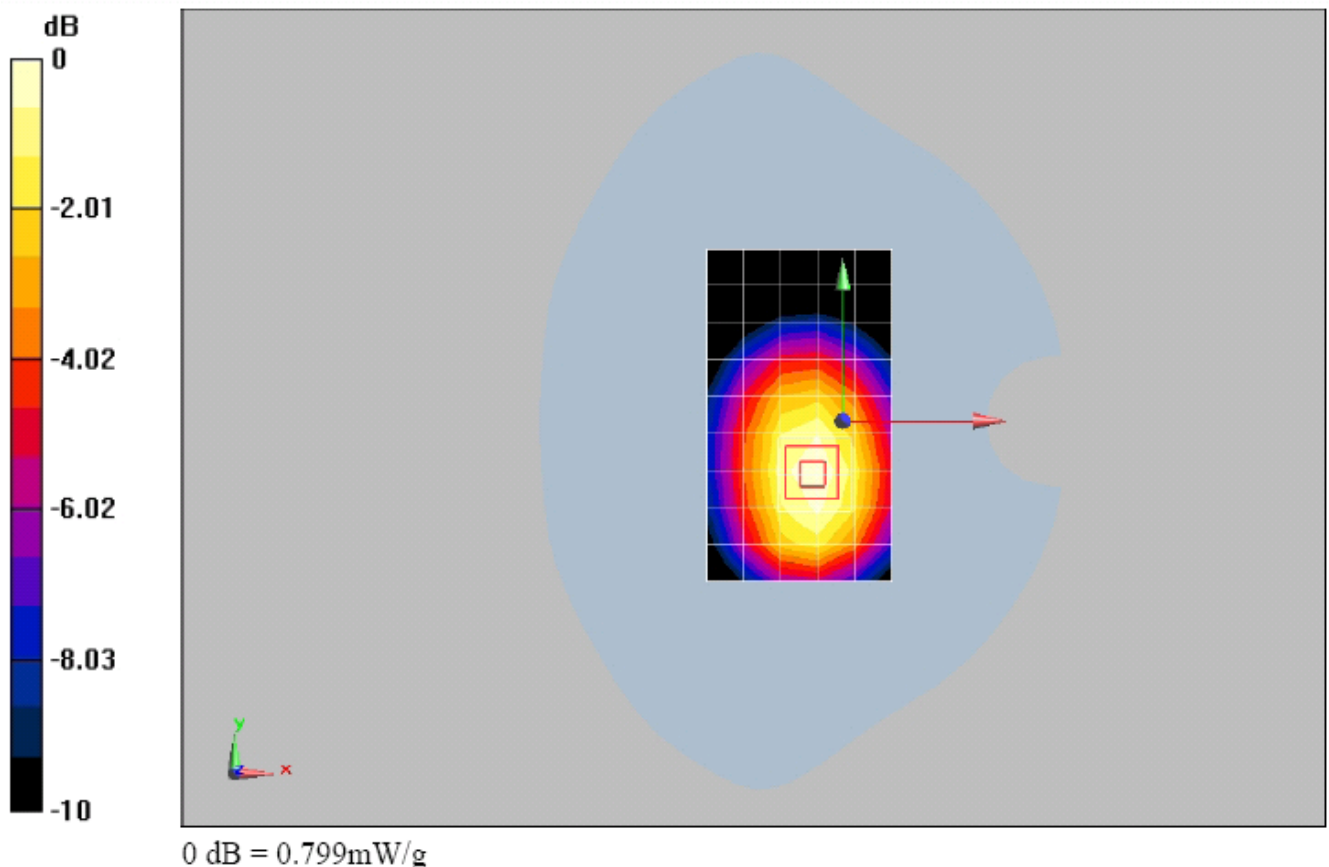**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- GSM850 GPRS 2TS towards ground**DUT: U3100-5**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.97, 5.97, 5.97); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.755 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.954 W/kg

SAR(1 g) = 0.719 mW/g; SAR(10 g) = 0.509 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.766 mW/g

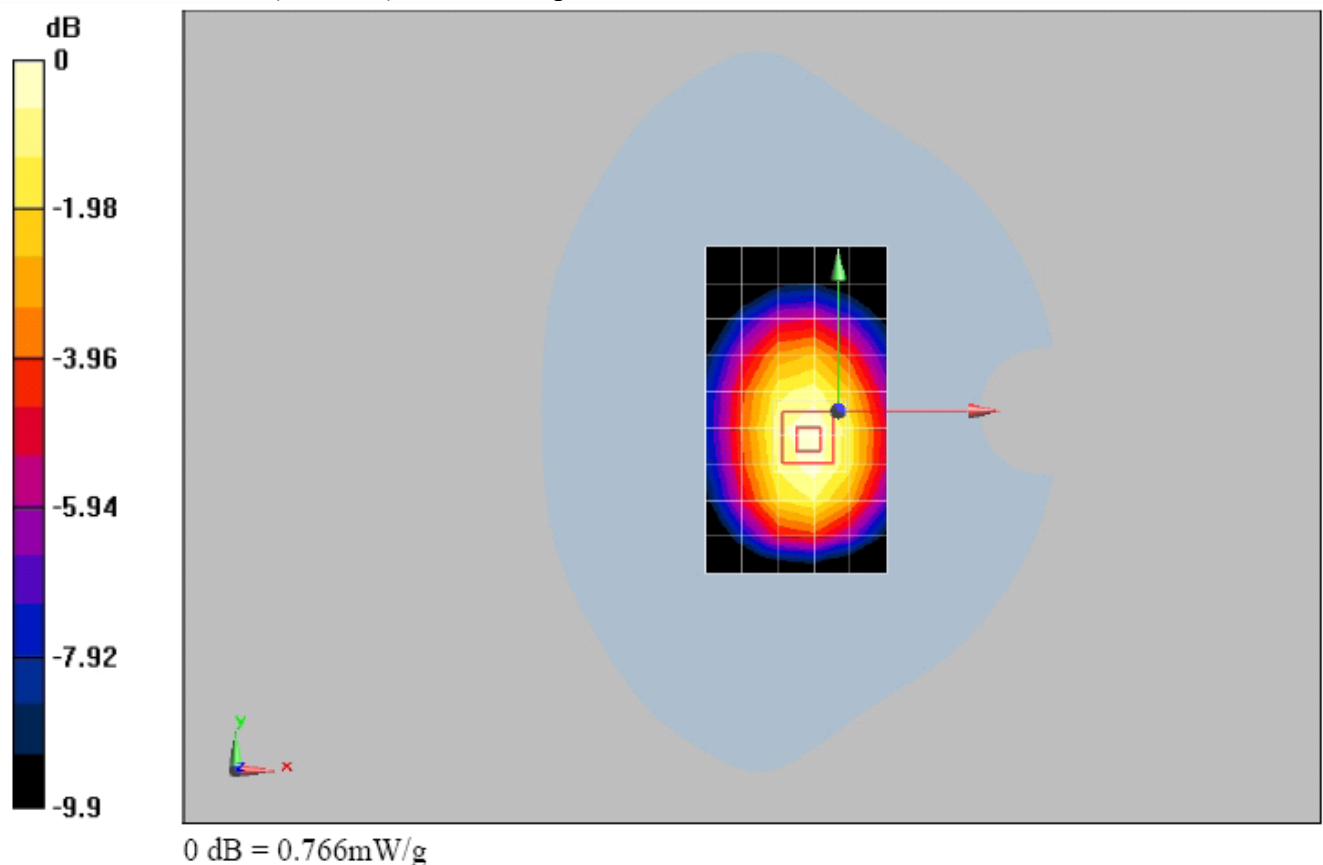**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- GSM850 GPRS 2TS towards ground**DUT: U3100-5**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.1

Medium parameters used: $f = 825$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.97, 5.97, 5.97); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM1; Type: SAM; Serial: TP-1475

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.832 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.5 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.813 mW/g; SAR(10 g) = 0.579 mW/g

Maximum value of SAR (measured) = 0.860 mW/g

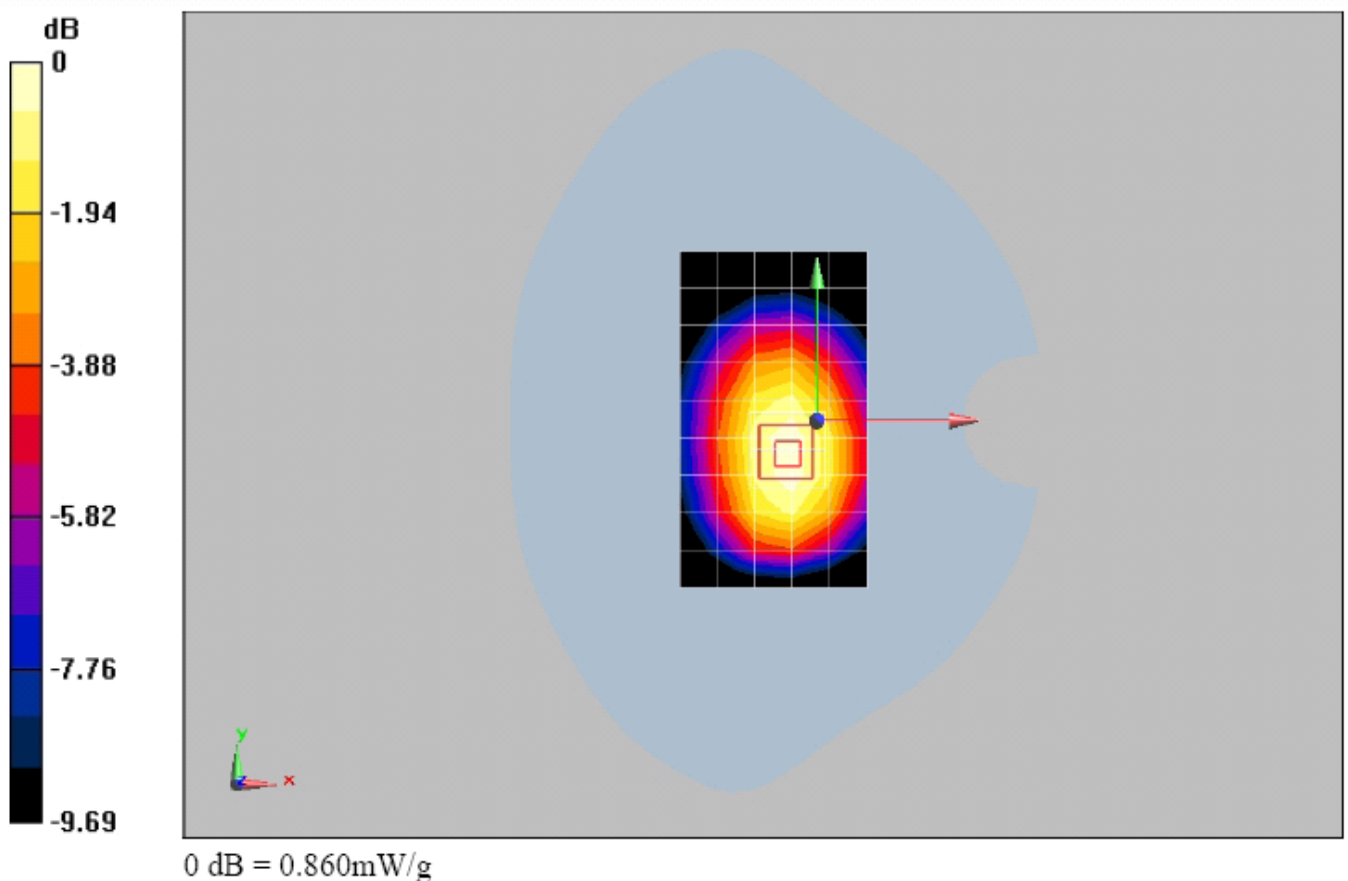**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- GSM850 towards ground with Headset**DUT: U3100-5**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.97, 5.97, 5.97); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.378 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.3 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.480 W/kg

SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.257 mW/g

Maximum value of SAR (measured) = 0.383 mW/g

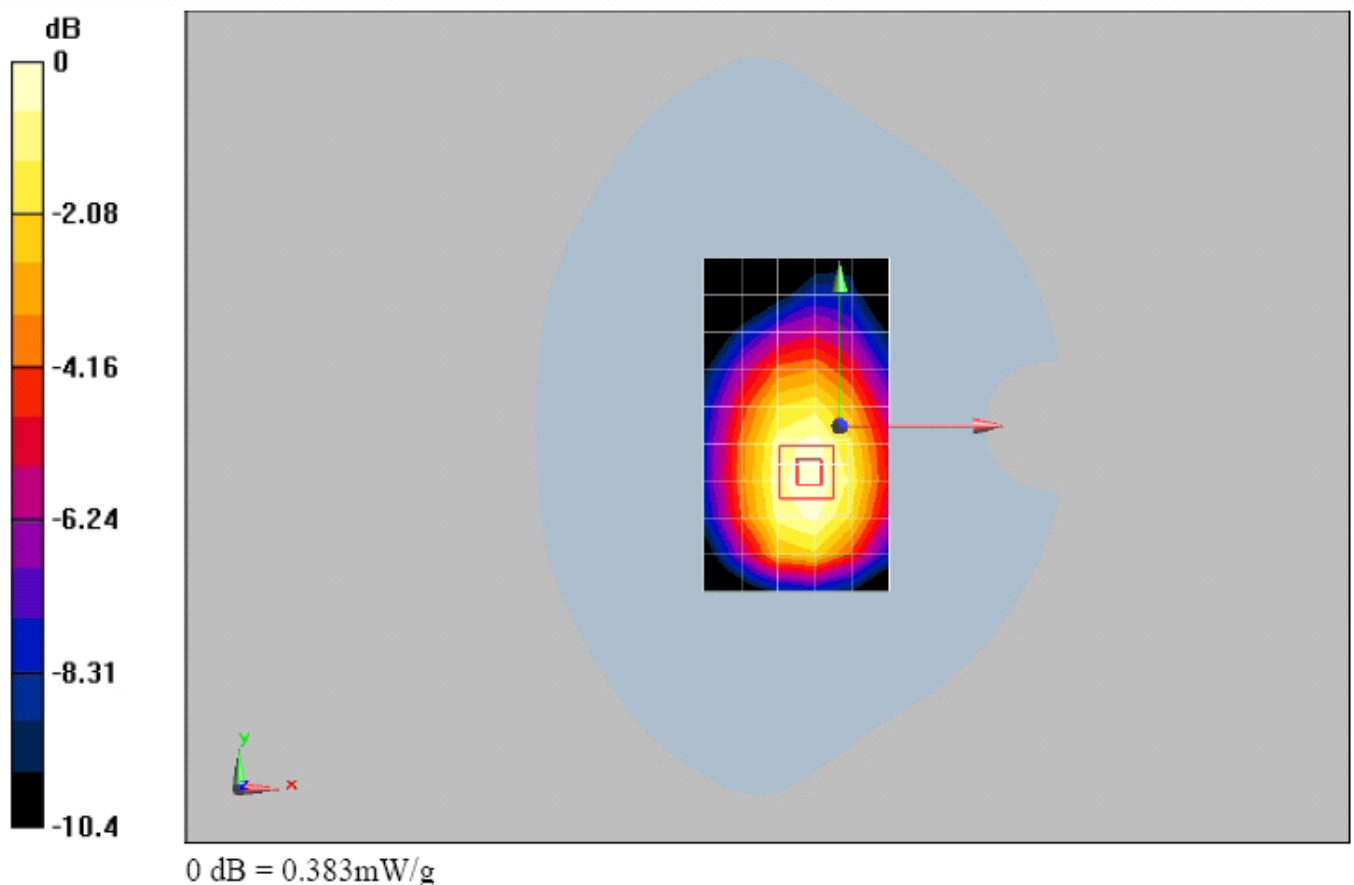**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- GSM850 towards ground with Bluetooth Headset**DUT: U3100-5**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.97, 5.97, 5.97); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM1; Type: SAM; Serial: TP-1475

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.593 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.9 V/m; Power Drift = 0.00138 dB

Peak SAR (extrapolated) = 0.742 W/kg

SAR(1 g) = 0.571 mW/g; SAR(10 g) = 0.406 mW/g

Maximum value of SAR (measured) = 0.606 mW/g

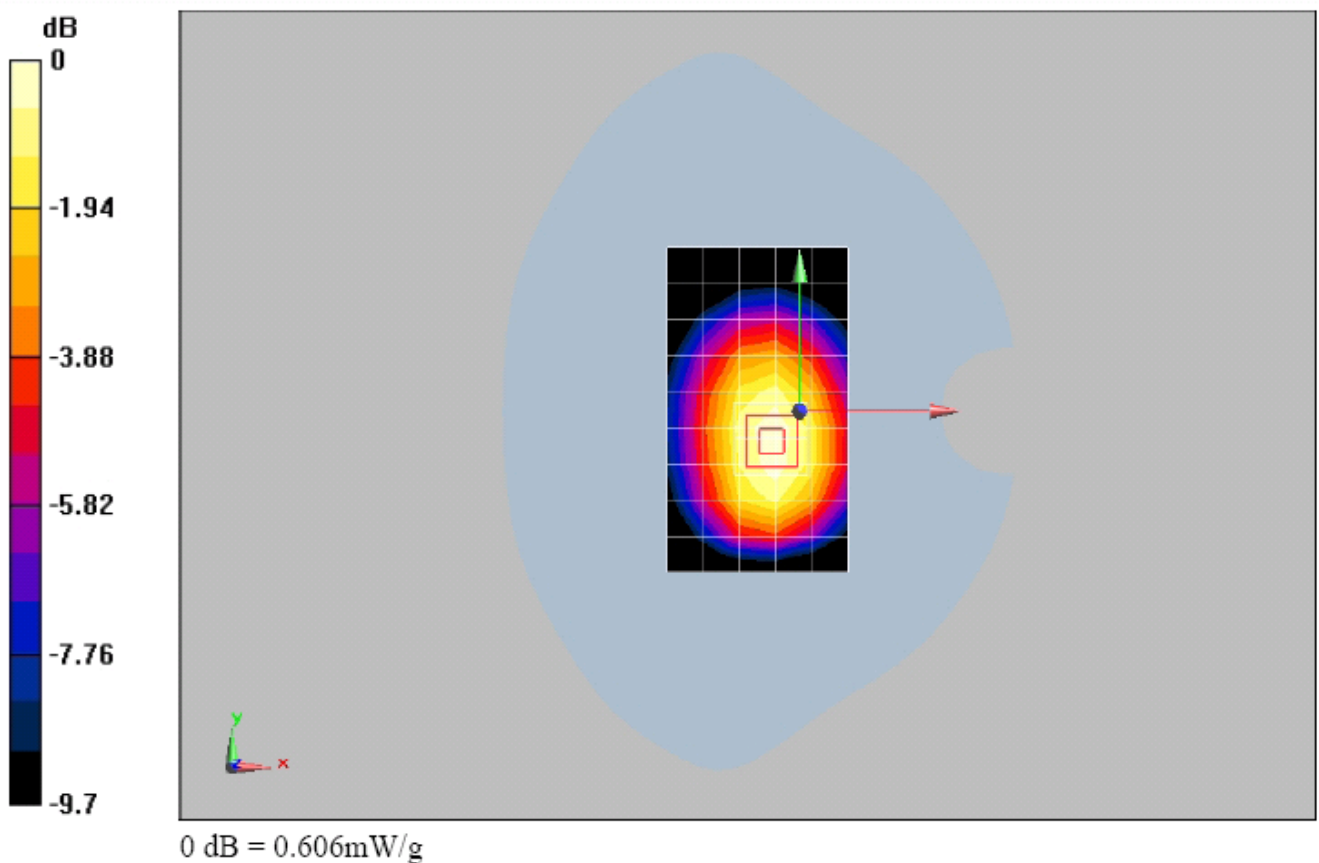**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

Test report no.: SYBH(Z-SAR)212012010

Annex 2.3 UMTS (WCDMA) FDD V 850MHz head

Date/Time: 2010-01-23 22:00:32

P1528_OET65_EN62209-LeftHandSide touched -WCDMA FDD V**DUT: U3100-5**

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 43$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.603 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.34 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.725 W/kg

SAR(1 g) = 0.550 mW/g; SAR(10 g) = 0.399 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.591 mW/g

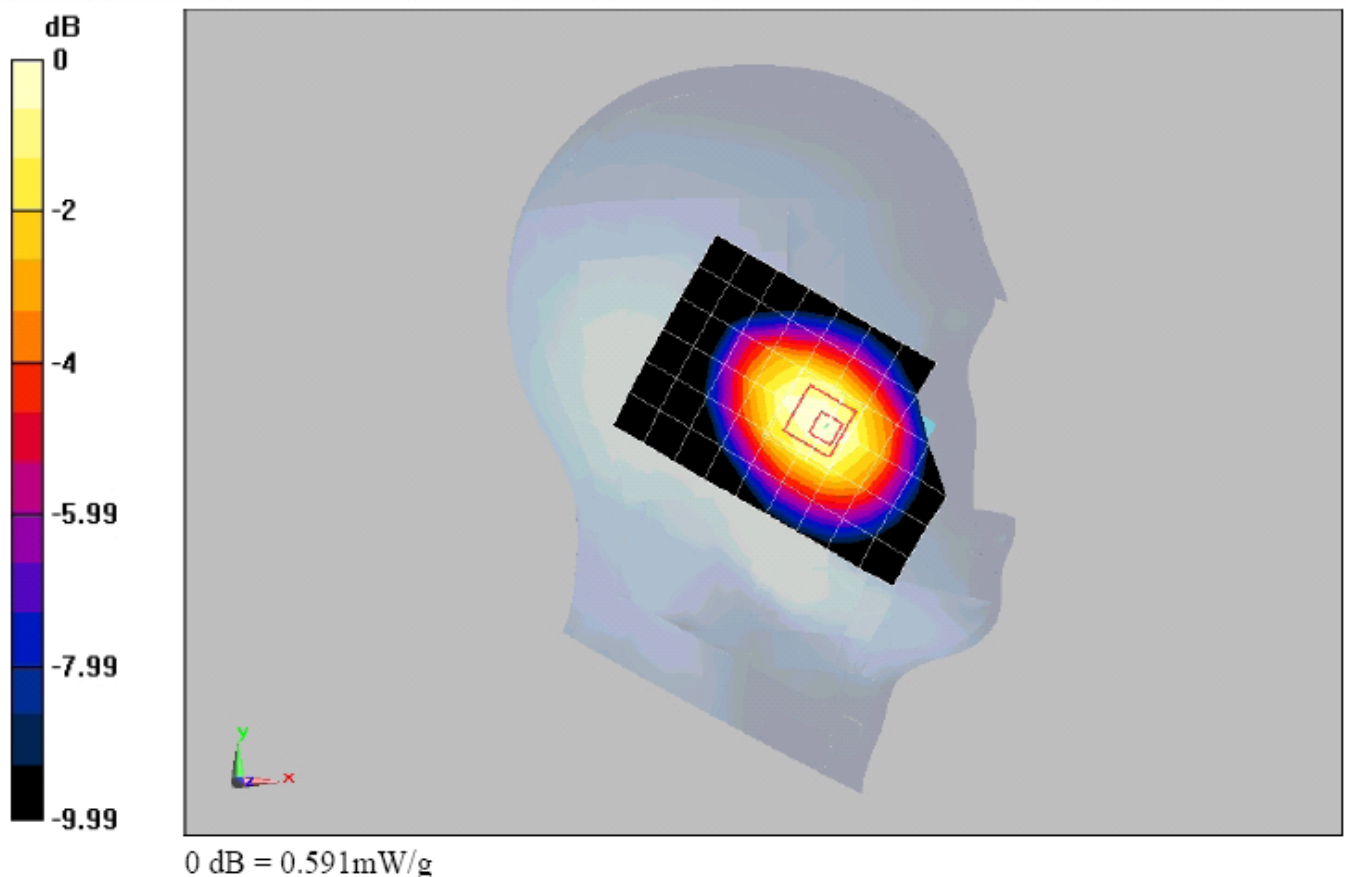**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 23.0°C; liquid temperature: 22.4°C

P1528_OET65_EN62209-LeftHandSide tilted 15° - WCDMA FDD V**DUT: U3100-5**

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 43$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125


Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.356 mW/g

Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.426 W/kg

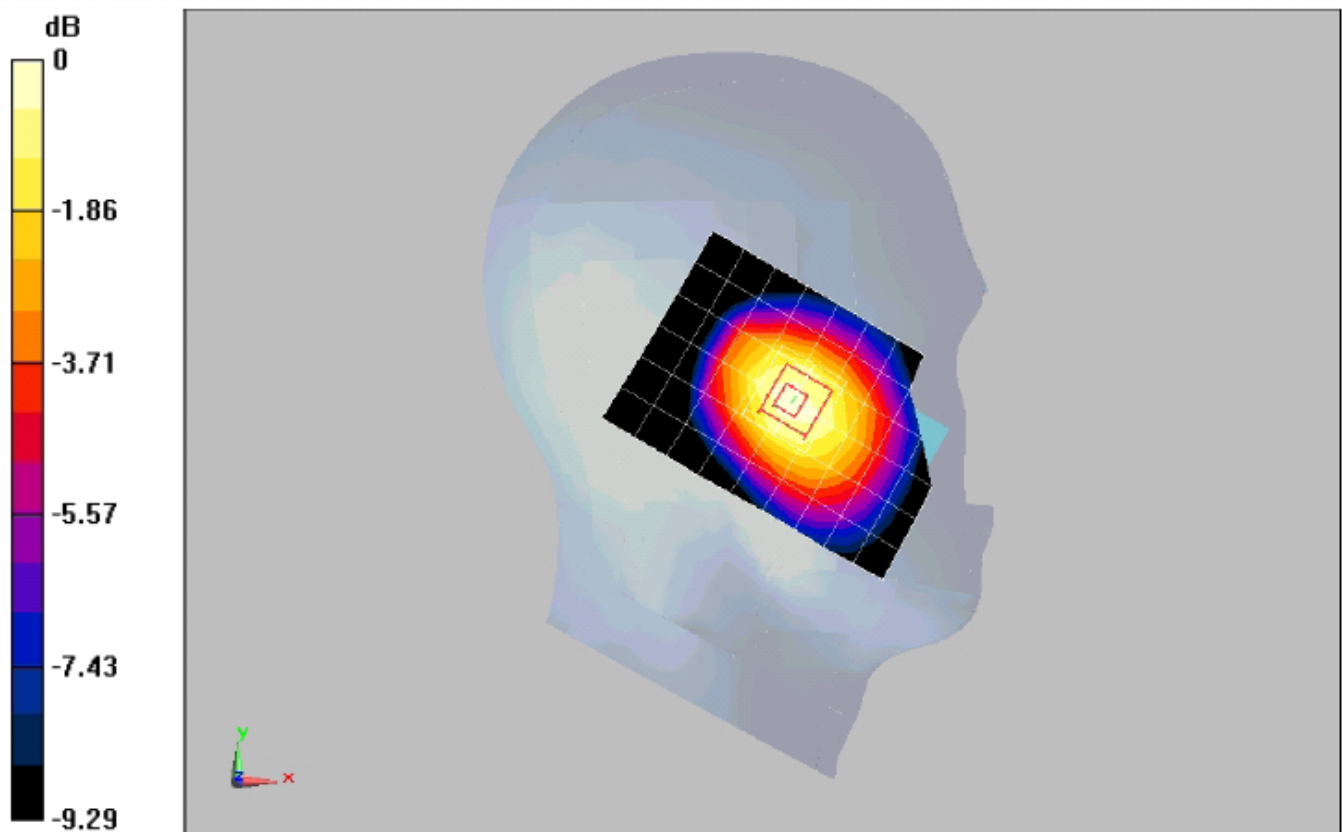SAR(1 g) = 0.335 mW/g; SAR(10 g) = 0.244 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

0 dB = 0.356mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209-RightHandSide touched -WCDMA FDD V**DUT: U3100-5**

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 43$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.674 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.65 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.817 W/kg

SAR(1 g) = 0.645 mW/g; SAR(10 g) = 0.465 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.685 mW/g

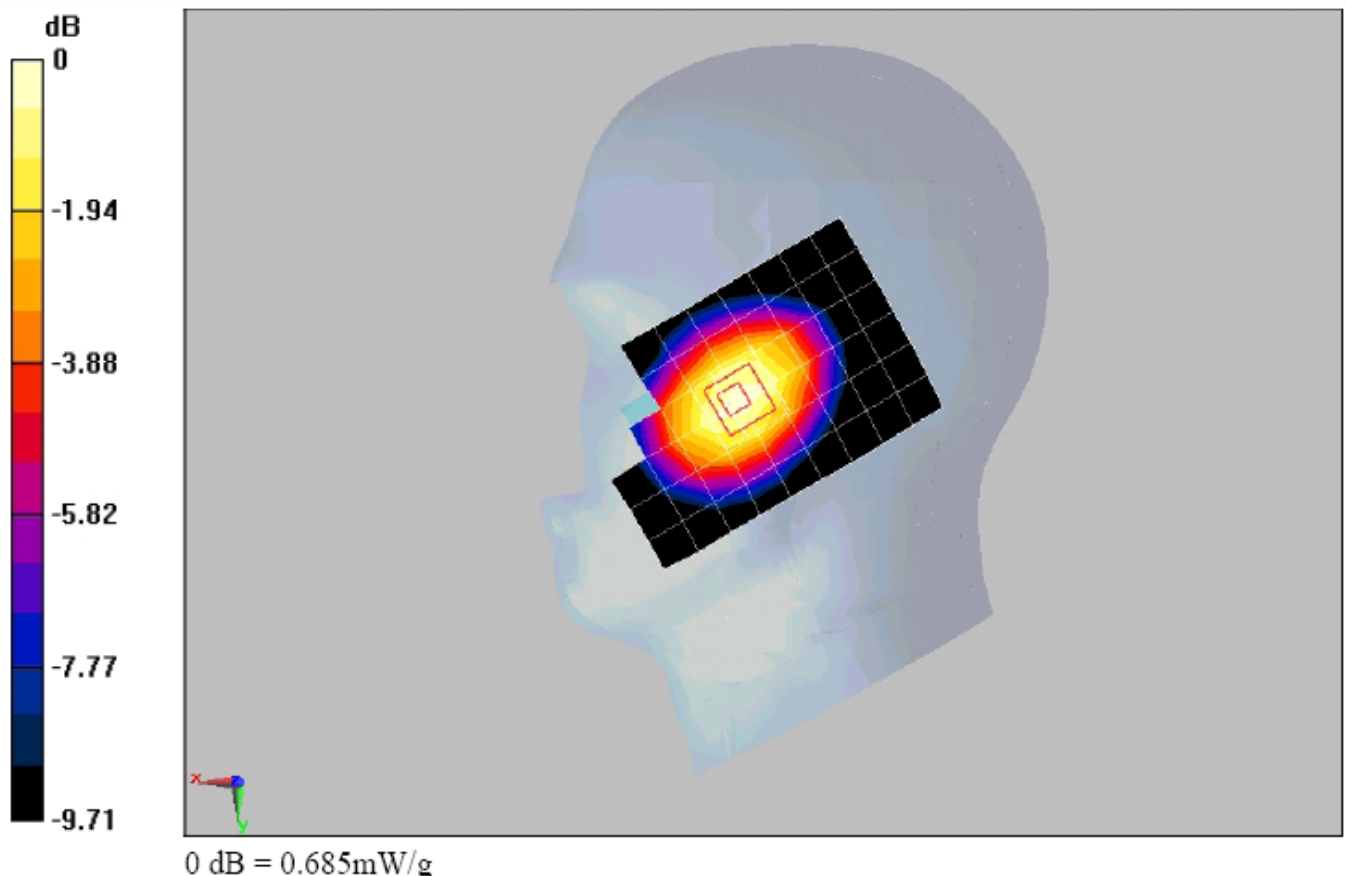**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209-RightHandSide tilted 15° -WCDMA FDD V**DUT: U3100-5**

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 43$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.375 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.455 W/kg

SAR(1 g) = 0.357 mW/g; SAR(10 g) = 0.259 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.382 mW/g

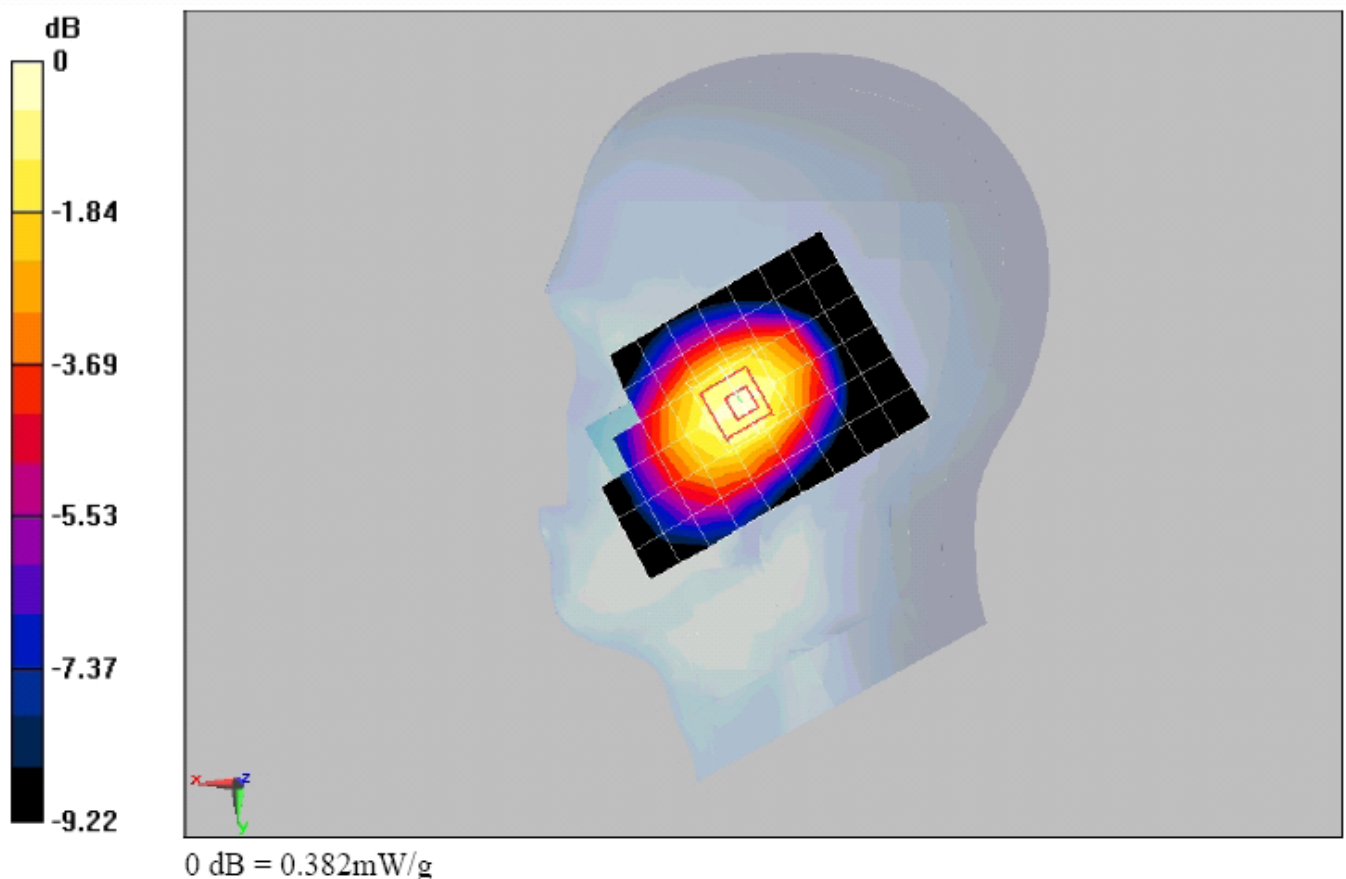**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209-RightHandSide touched -WCDMA FDD V**DUT: U3100-5**

Communication System: WCDMA850; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.925$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.713 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.81 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.864 W/kg

SAR(1 g) = 0.660 mW/g; SAR(10 g) = 0.468 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.720 mW/g

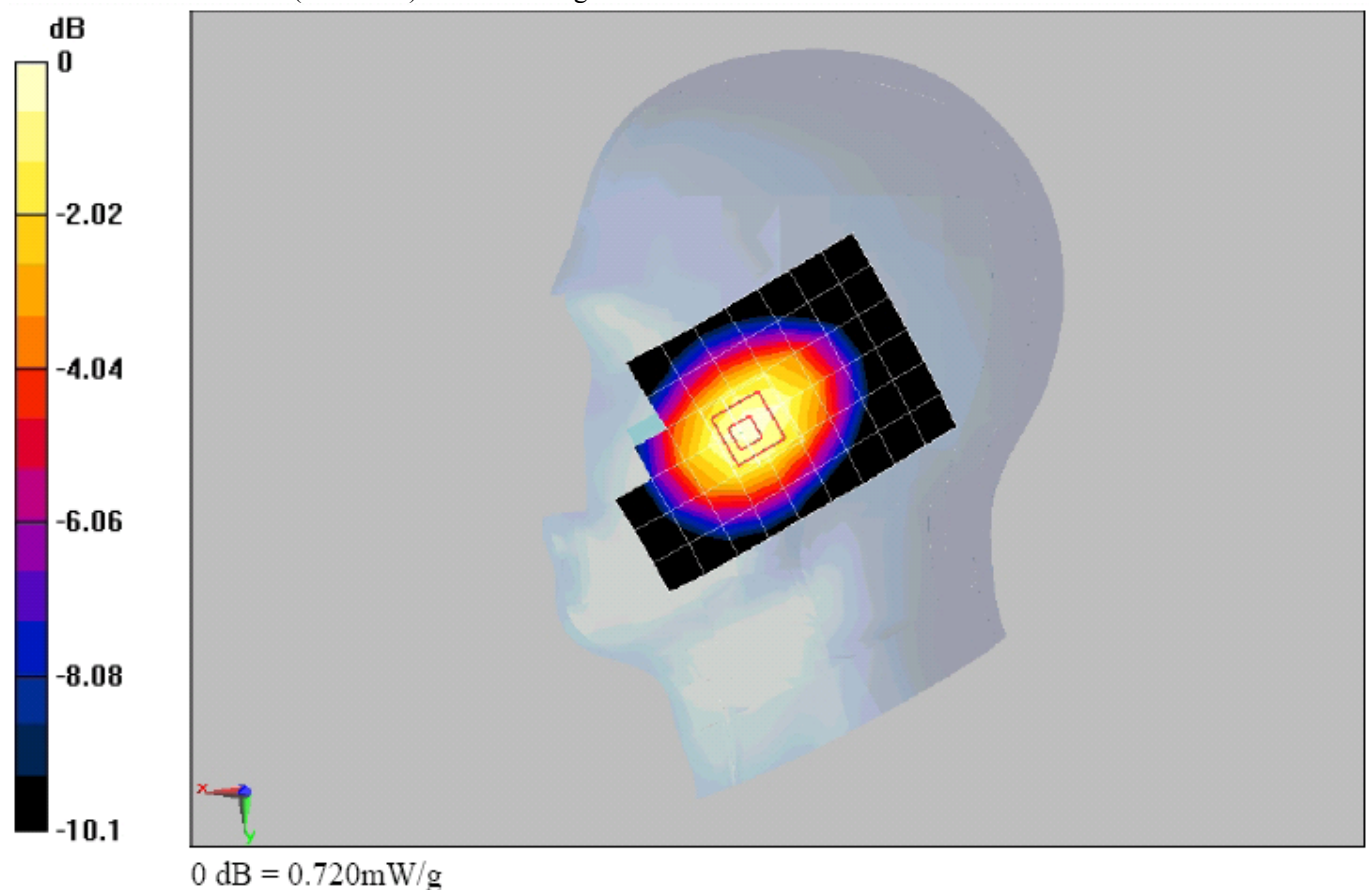**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209-RightHandSide touched -WCDMA FDD V**DUT: U3100-5**

Communication System: WCDMA850; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 43.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.772 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 0.948 W/kg

SAR(1 g) = 0.735 mW/g; SAR(10 g) = 0.528 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.786 mW/g

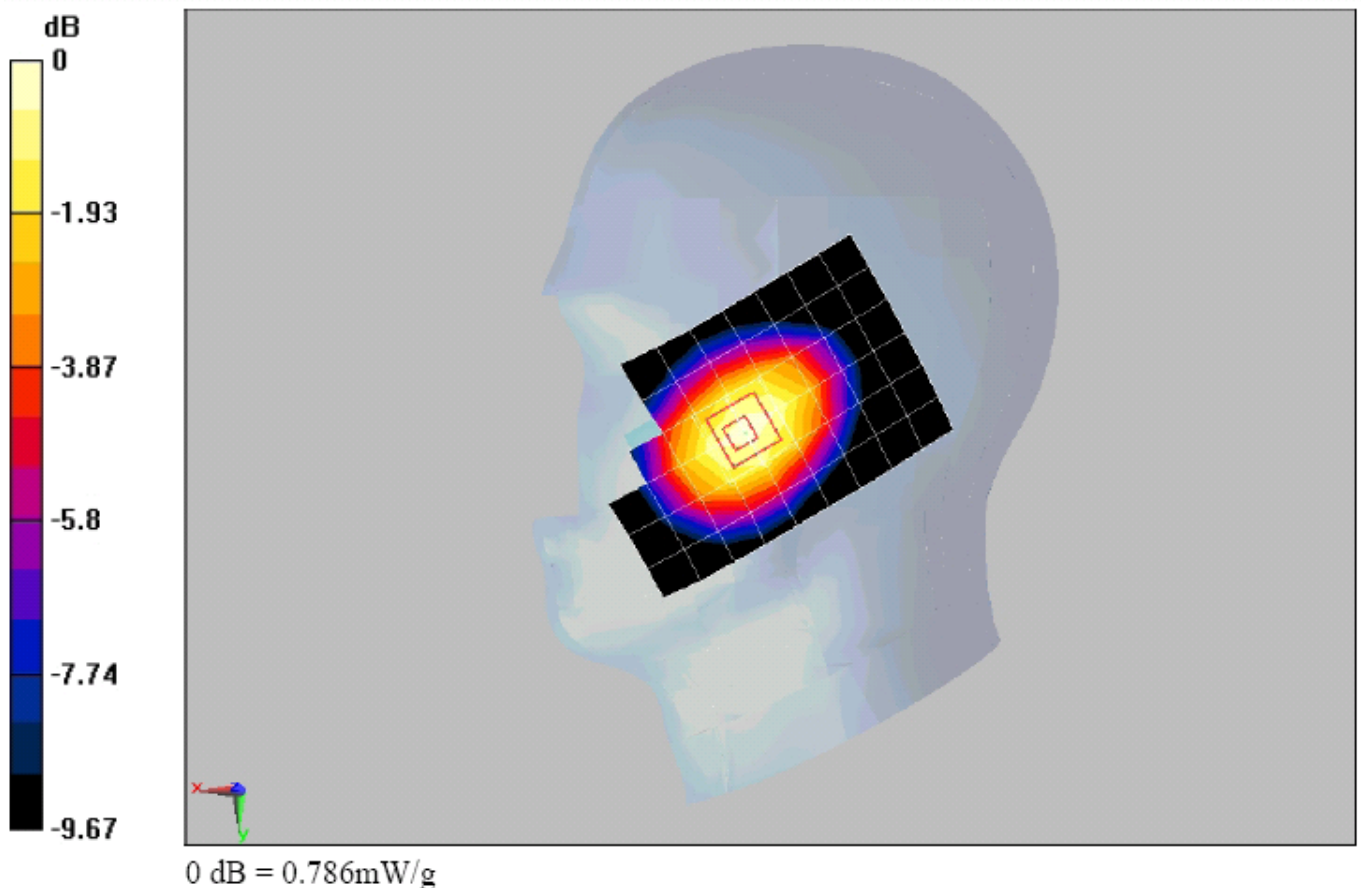**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

Annex 2.4 UMTS (WCDMA) FDD V 850MHz body

Date/Time: 2010-01-26 22:11:12

P1528_OET65_EN62209- WCDMA FDD V towards phantom**DUT: U3100-5**

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.986$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.97, 5.97, 5.97); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.383 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.9 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 0.493 W/kg

SAR(1 g) = 0.383 mW/g; SAR(10 g) = 0.278 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.406 mW/g

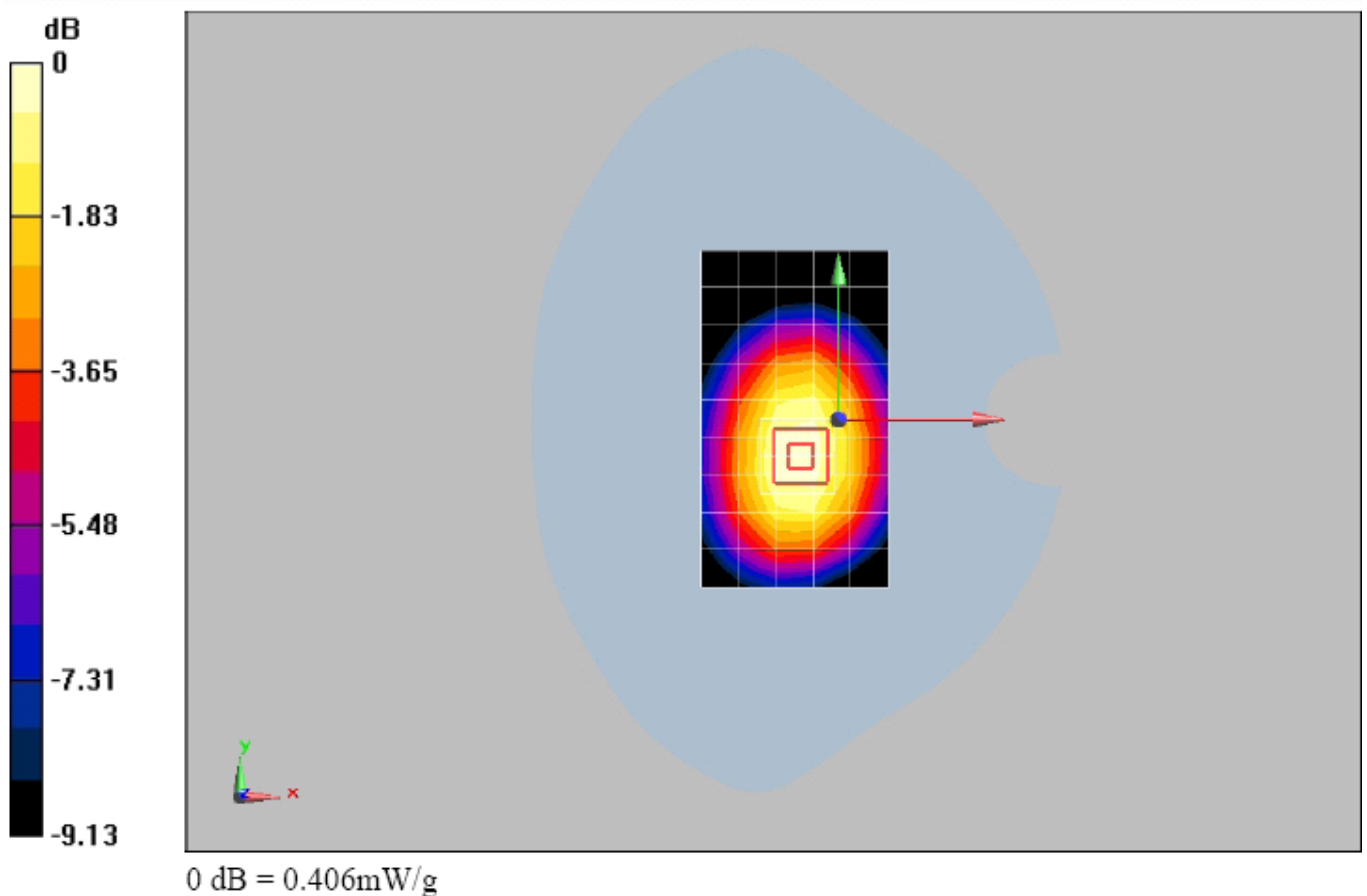**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- WCDMA FDD V towards ground**DUT: U3100-5**

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.986$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.97, 5.97, 5.97); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.533 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.2 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 0.673 W/kg

SAR(1 g) = 0.502 mW/g; SAR(10 g) = 0.357 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.534 mW/g

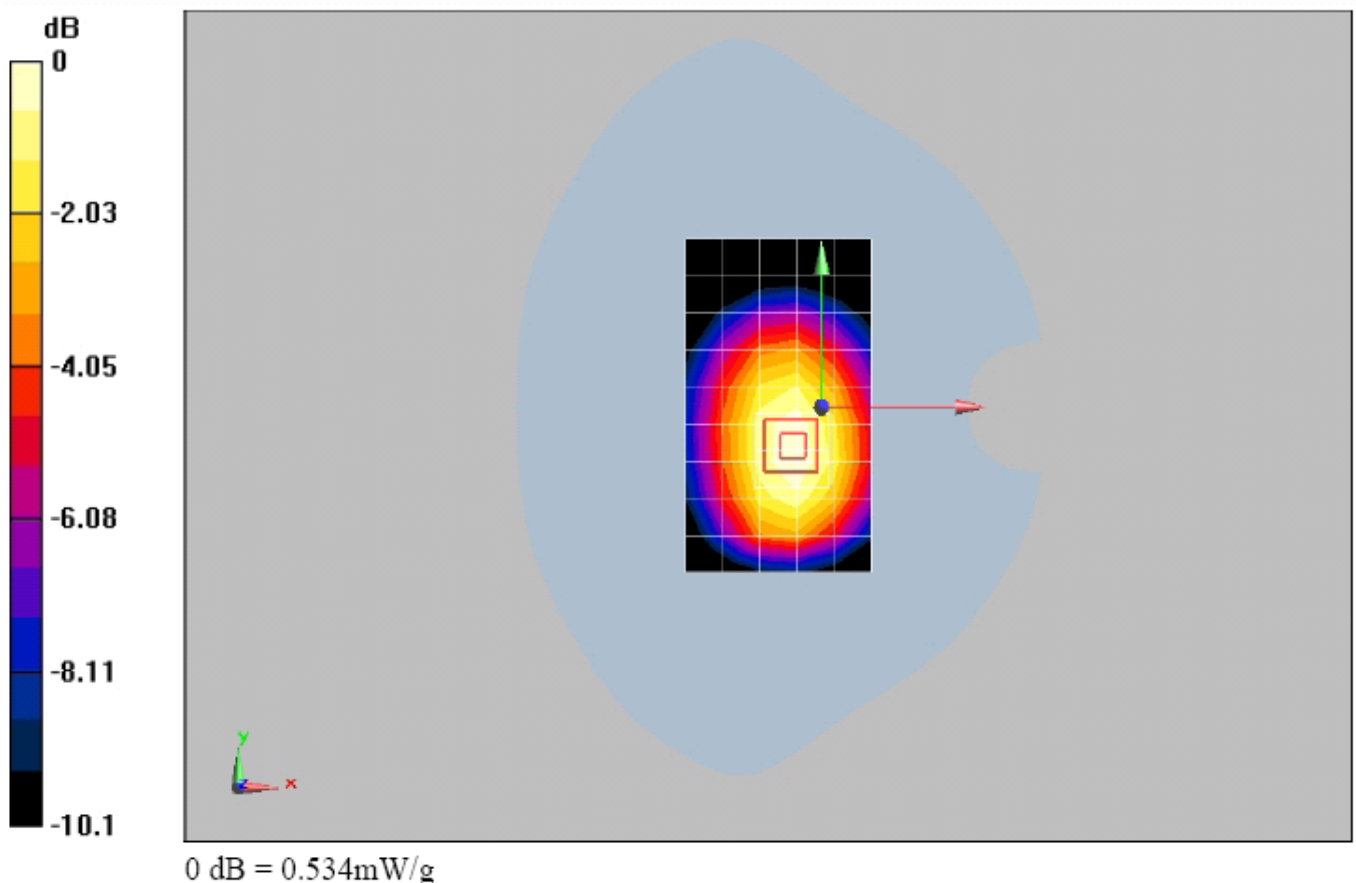**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- WCDMA FDD V towards ground**DUT: U3100-5**

Communication System: WCDMA850; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.925$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.472 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.6 V/m; Power Drift = -0.00324 dB

Peak SAR (extrapolated) = 0.593 W/kg

SAR(1 g) = 0.450 mW/g; SAR(10 g) = 0.318 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.479 mW/g

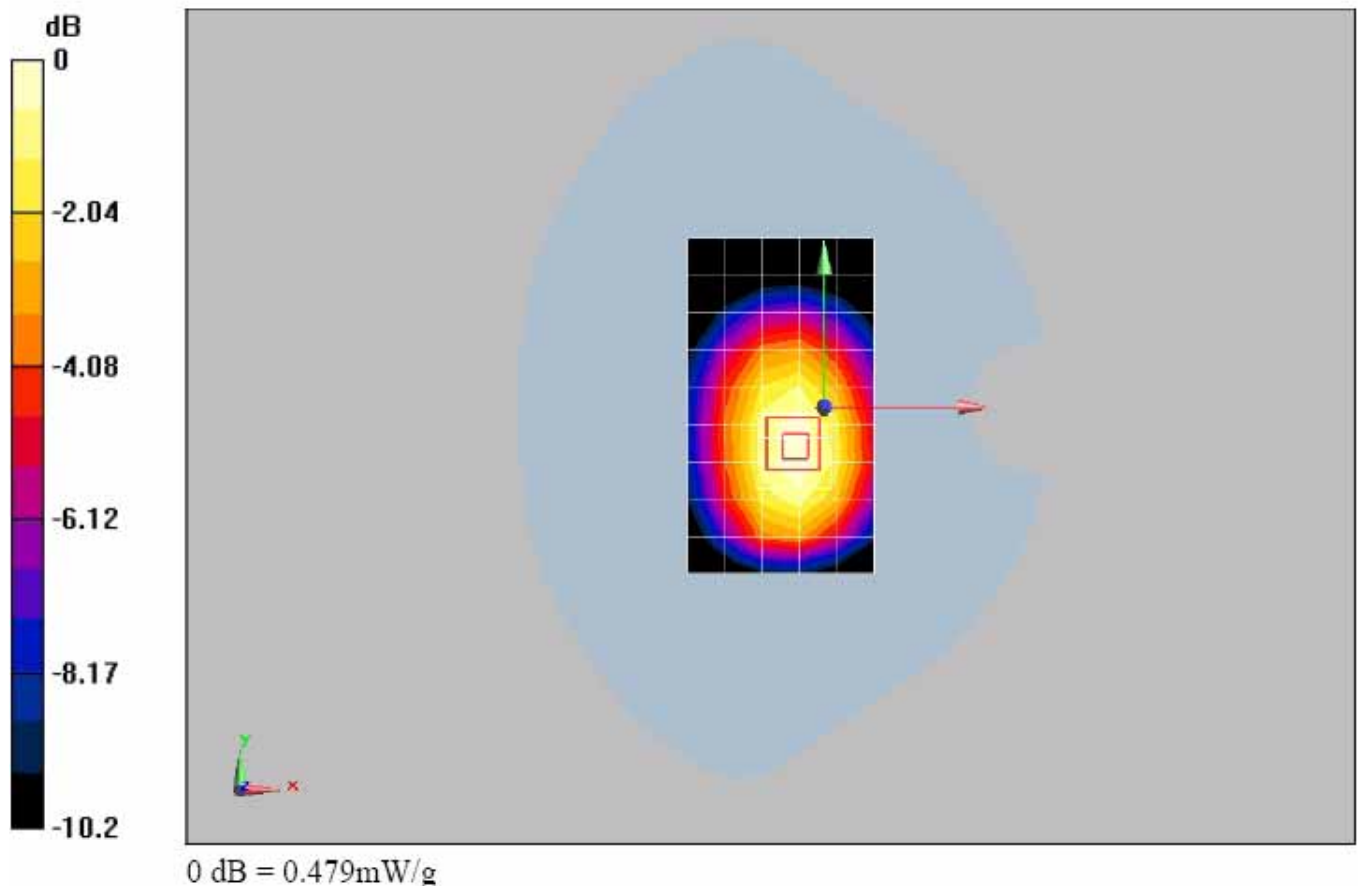**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- WCDMA FDD V towards ground**DUT: U3100-5**

Communication System: WCDMA850; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 43.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.543 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.1 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.676 W/kg

SAR(1 g) = 0.516 mW/g; SAR(10 g) = 0.367 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.550 mW/g

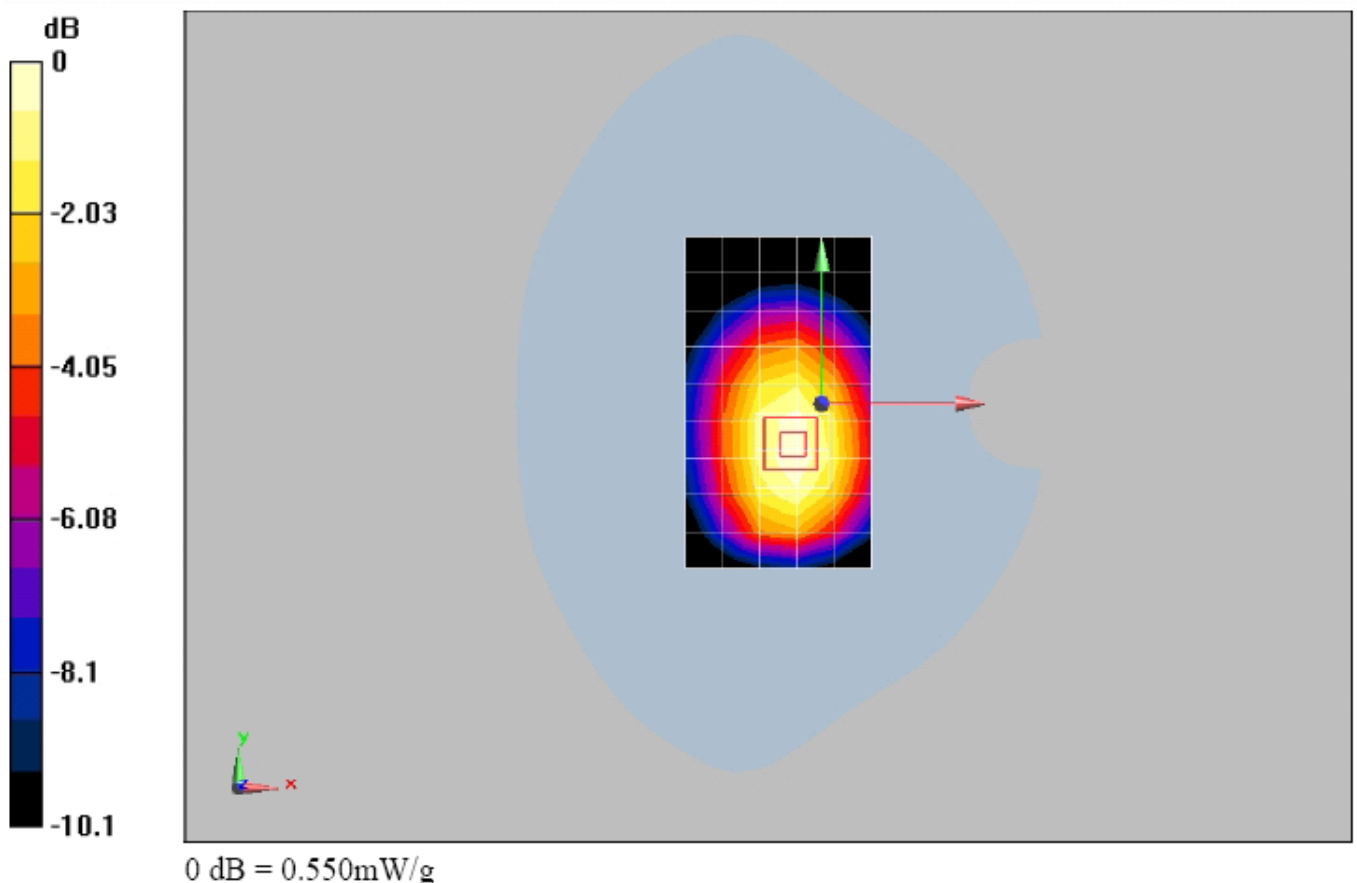**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- WCDMA FDD V towards ground with Headset**DUT: U3100-5**

Communication System: WCDMA850; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 43.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.358 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.3 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.451 W/kg

SAR(1 g) = 0.341 mW/g; SAR(10 g) = 0.241 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.363 mW/g

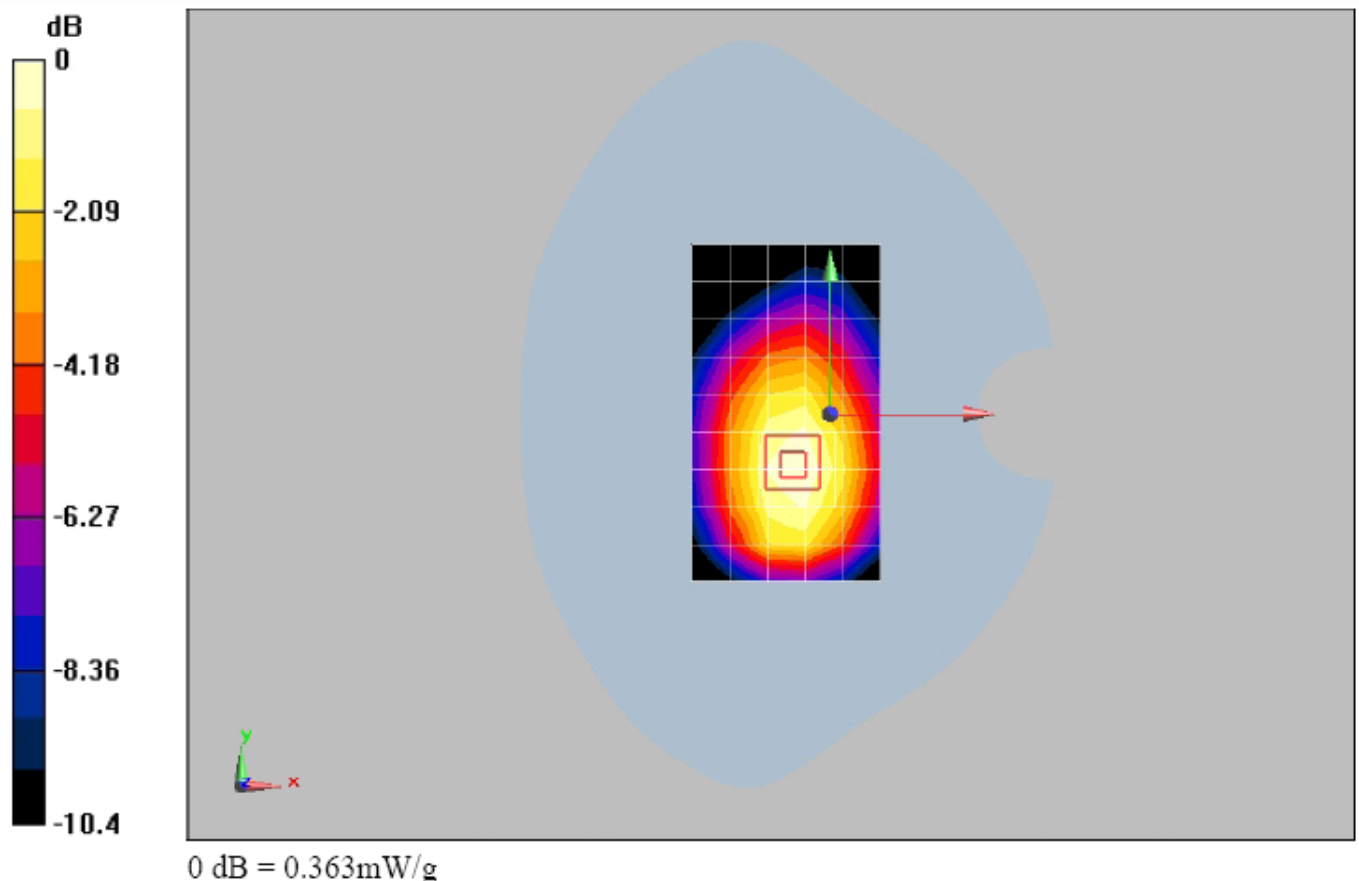**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- WCDMA FDD V towards ground with Bluetooth Headset**DUT: U3100-5**

Communication System: WCDMA850; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 43.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.537 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.5 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.682 W/kg

SAR(1 g) = 0.514 mW/g; SAR(10 g) = 0.365 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.552 mW/g

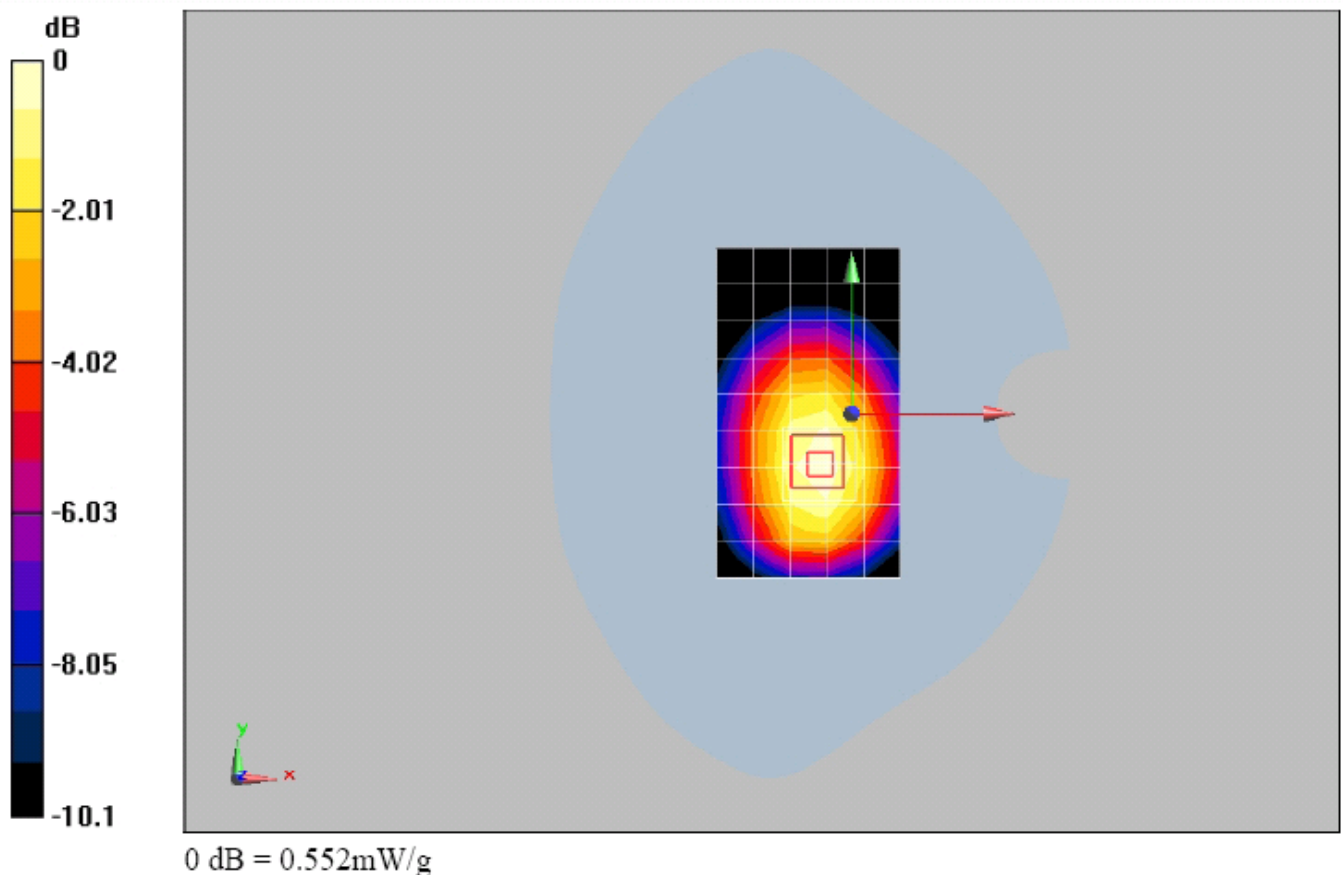**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

Test report no.: SYBH(Z-SAR)212012010

Annex 2.5 PCS 1900 MHz head

Date/Time: 2010-01-25 09:15:12

P1528_OET65_EN62209-LeftHandSide touched-GSM1900**DUT: U3100-5**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.605 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.27 V/m; Power Drift = 0.199 dB

Peak SAR (extrapolated) = 0.957 W/kg

SAR(1 g) = 0.594 mW/g; SAR(10 g) = 0.345 mW/g

Maximum value of SAR (measured) = 0.655 mW/g

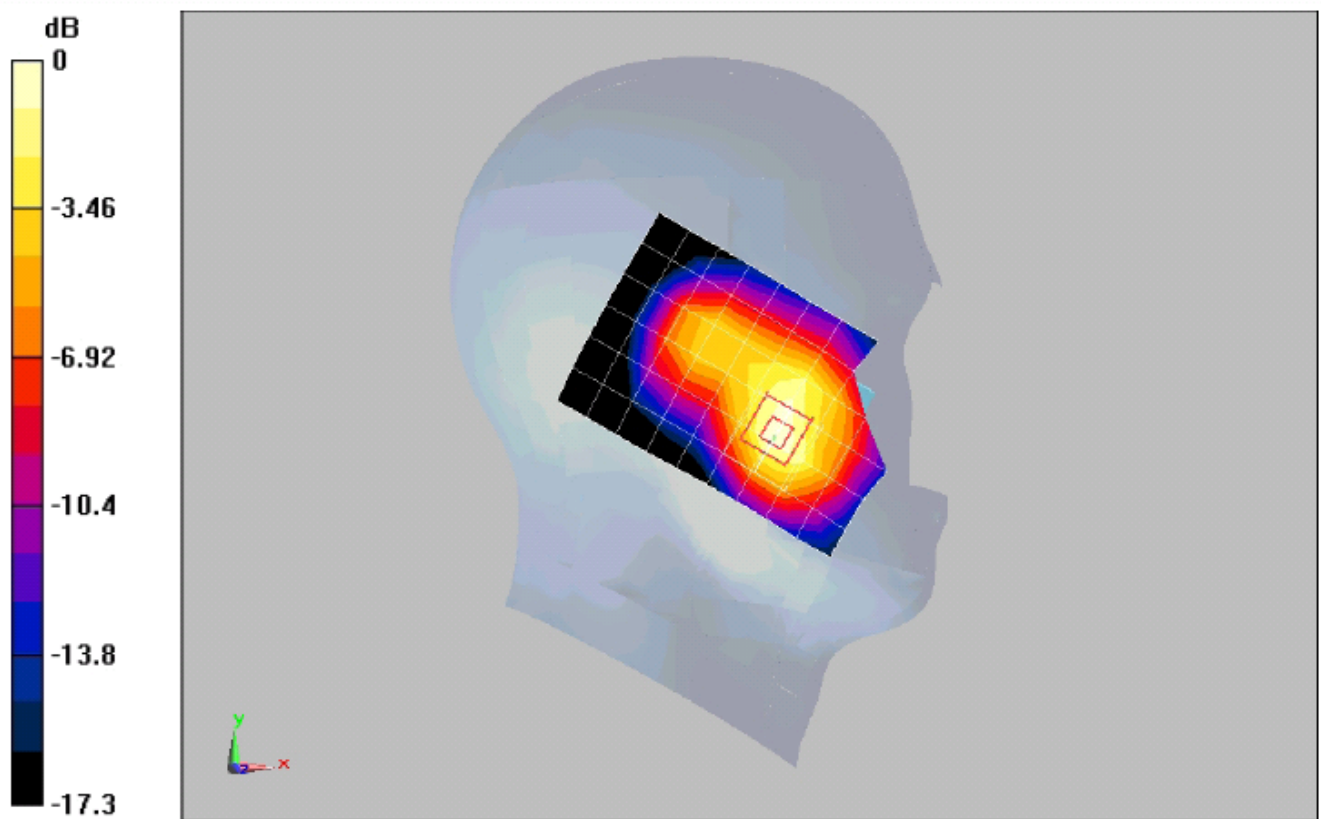

0 dB = 0.655mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209-LeftHandSide tilted 15°- GSM1900**DUT: U3100-5**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.259 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.67 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.411 W/kg

SAR(1 g) = 0.266 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.289 mW/g

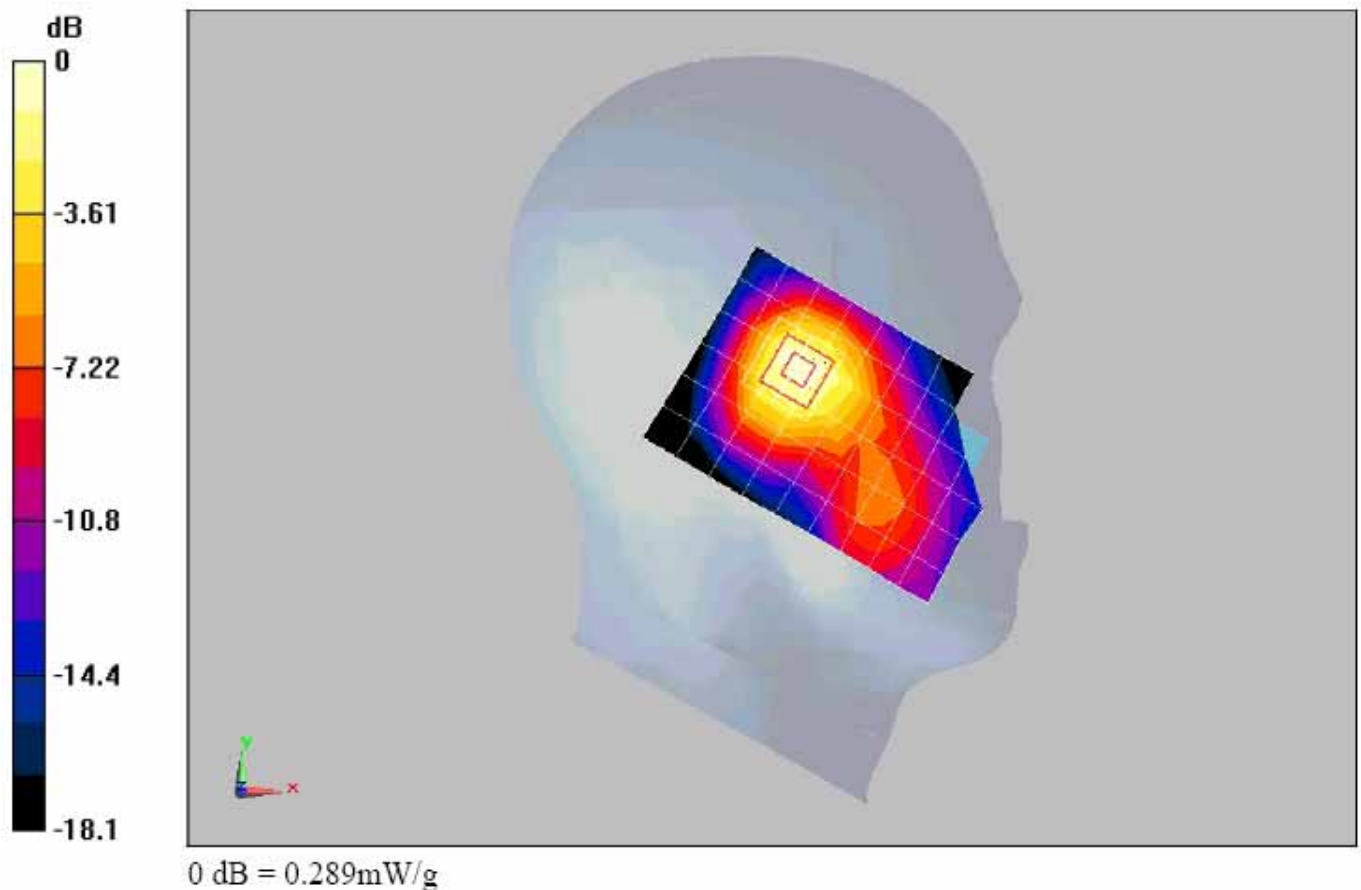**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209-RightHandSide touched-GSM1900**DUT: U3100-5**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM2; Type: SAM; Serial: TP-1474

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.664 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.16 V/m; Power Drift = 0.083 dB

Peak SAR (extrapolated) = 0.968 W/kg

SAR(1 g) = 0.657 mW/g; SAR(10 g) = 0.389 mW/g

Maximum value of SAR (measured) = 0.718 mW/g

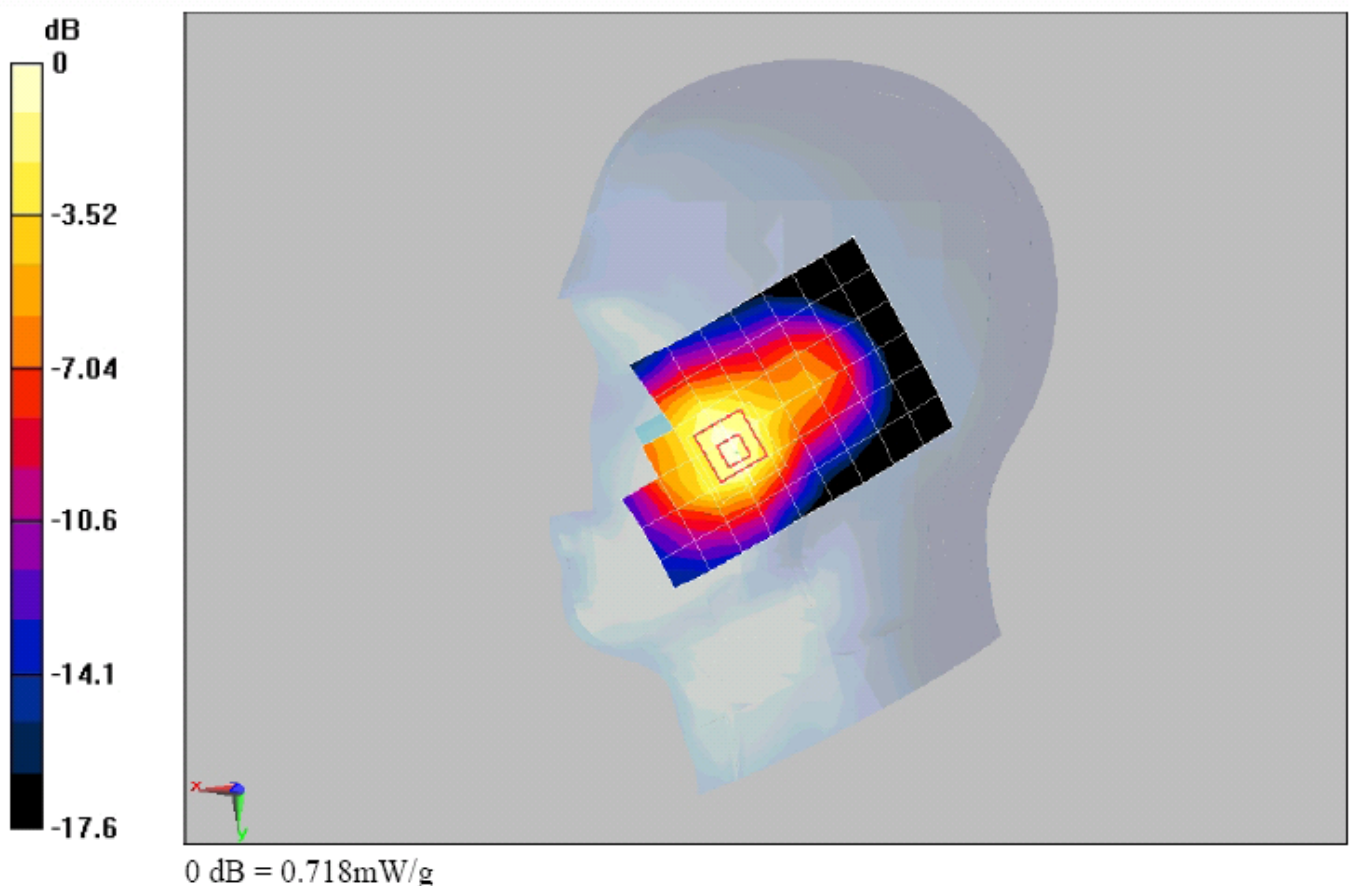**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209-RightHandSide tilted 15°-GSM1900**DUT: U3100-5**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM2; Type: SAM; Serial: TP-1474

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.202 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.63 V/m; Power Drift = 0.122 dB

Peak SAR (extrapolated) = 0.296 W/kg

SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.125 mW/g

Maximum value of SAR (measured) = 0.217 mW/g

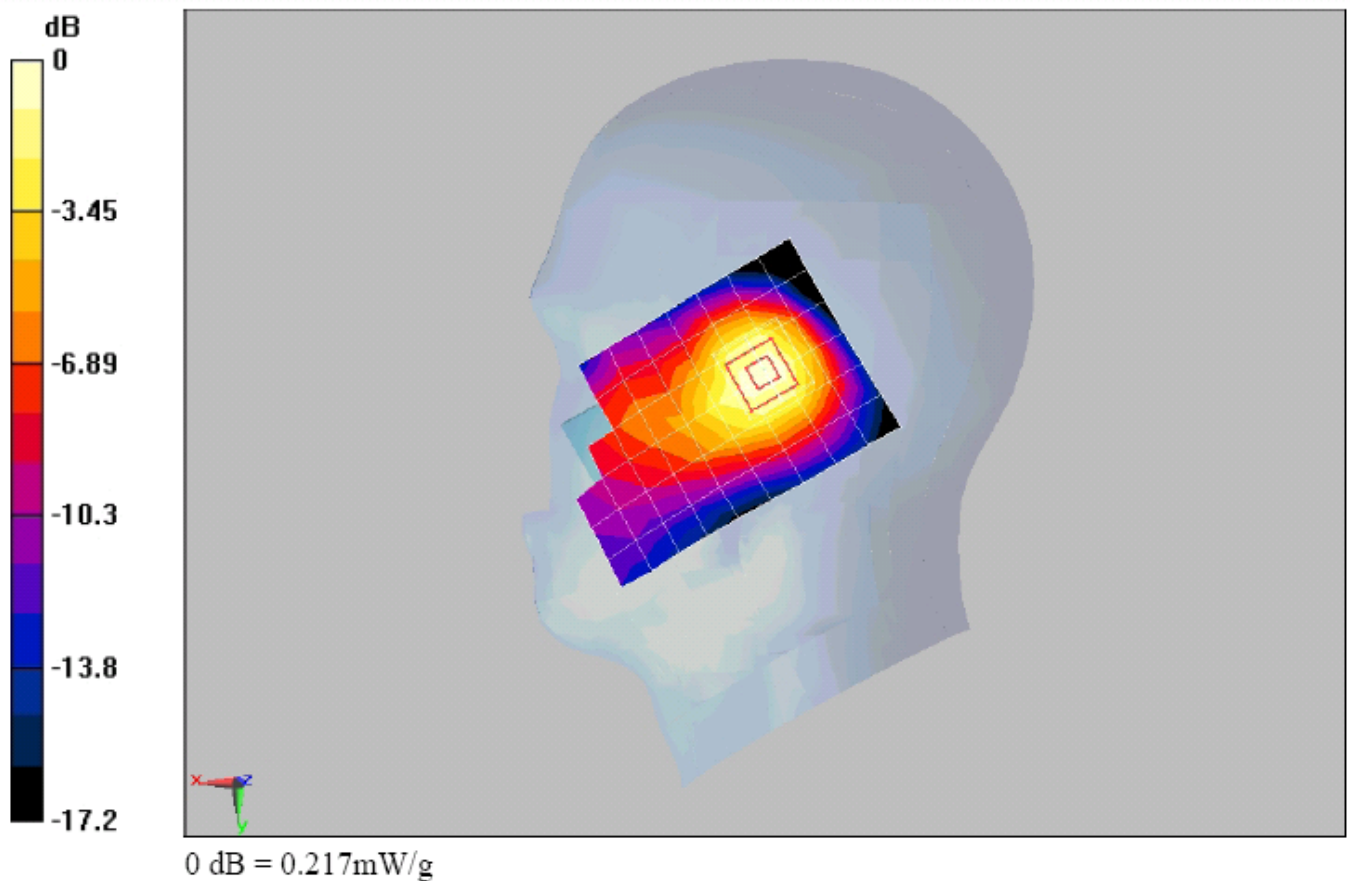**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- RightHandSide touched –GSM1900**DUT: U3100-5**

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM2; Type: SAM; Serial: TP-1474

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.563 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.8 V/m; Power Drift = 0.123 dB

Peak SAR (extrapolated) = 0.847 W/kg

SAR(1 g) = 0.564 mW/g; SAR(10 g) = 0.329 mW/g

Maximum value of SAR (measured) = 0.616 mW/g

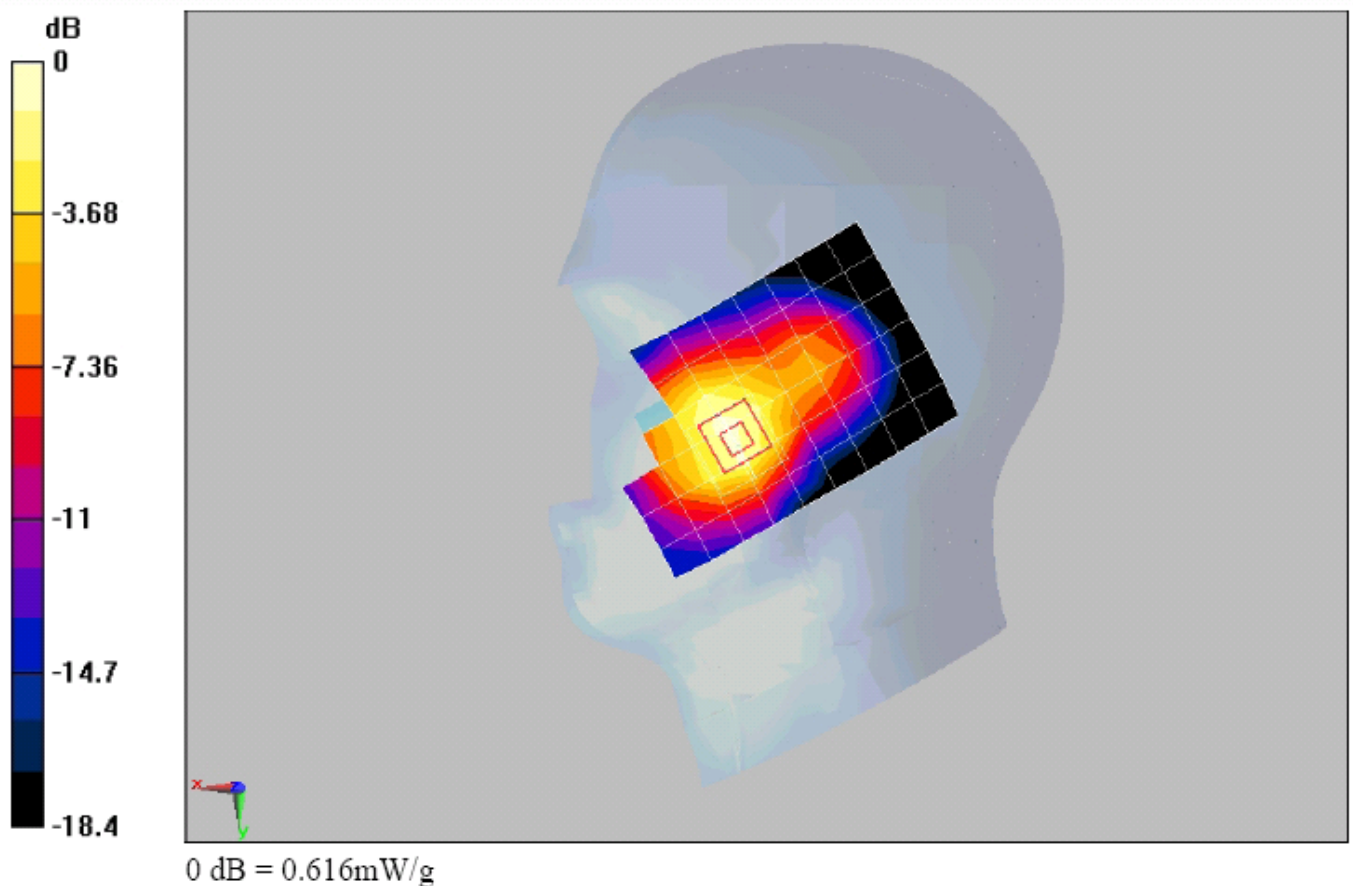**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- RightHandSide touched –GSM1900**DUT: U3100-5**

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.731 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.38 V/m; Power Drift = 0.065 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.718 mW/g; SAR(10 g) = 0.428 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.790 mW/g

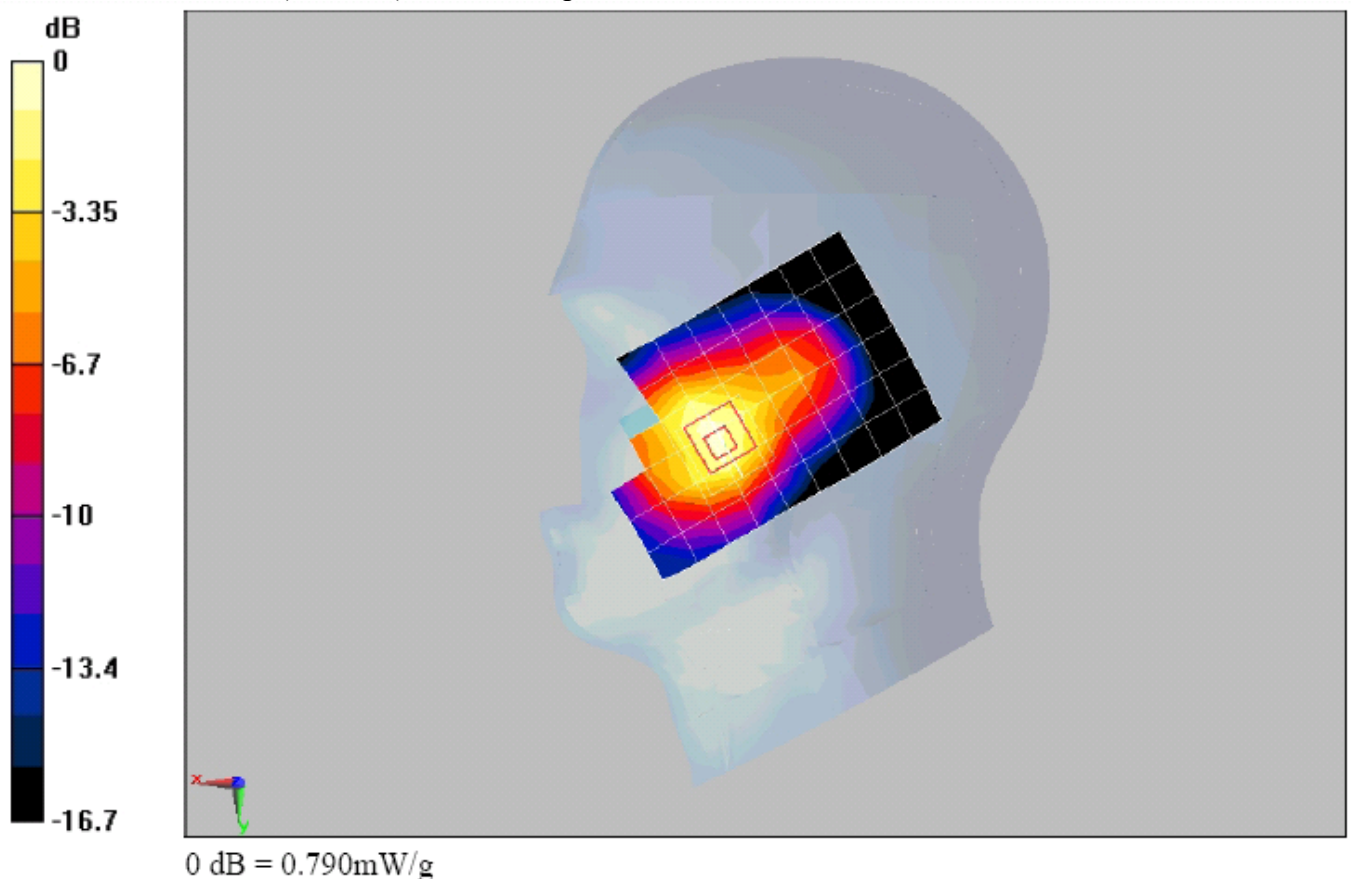**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

Test report no.: SYBH(Z-SAR)212012010

Annex 2.6 PCS 1900 MHz body

Date/Time: 2010-01-27 22:16:40

P1528_OET65_EN62209- GSM1900 GPRS 2TS towards phantom**DUT: U3100-5**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.62, 4.62, 4.62); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM1; Type: SAM; Serial: TP-1475

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125


body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.397 mW/g

body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.79 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 0.579 W/kg

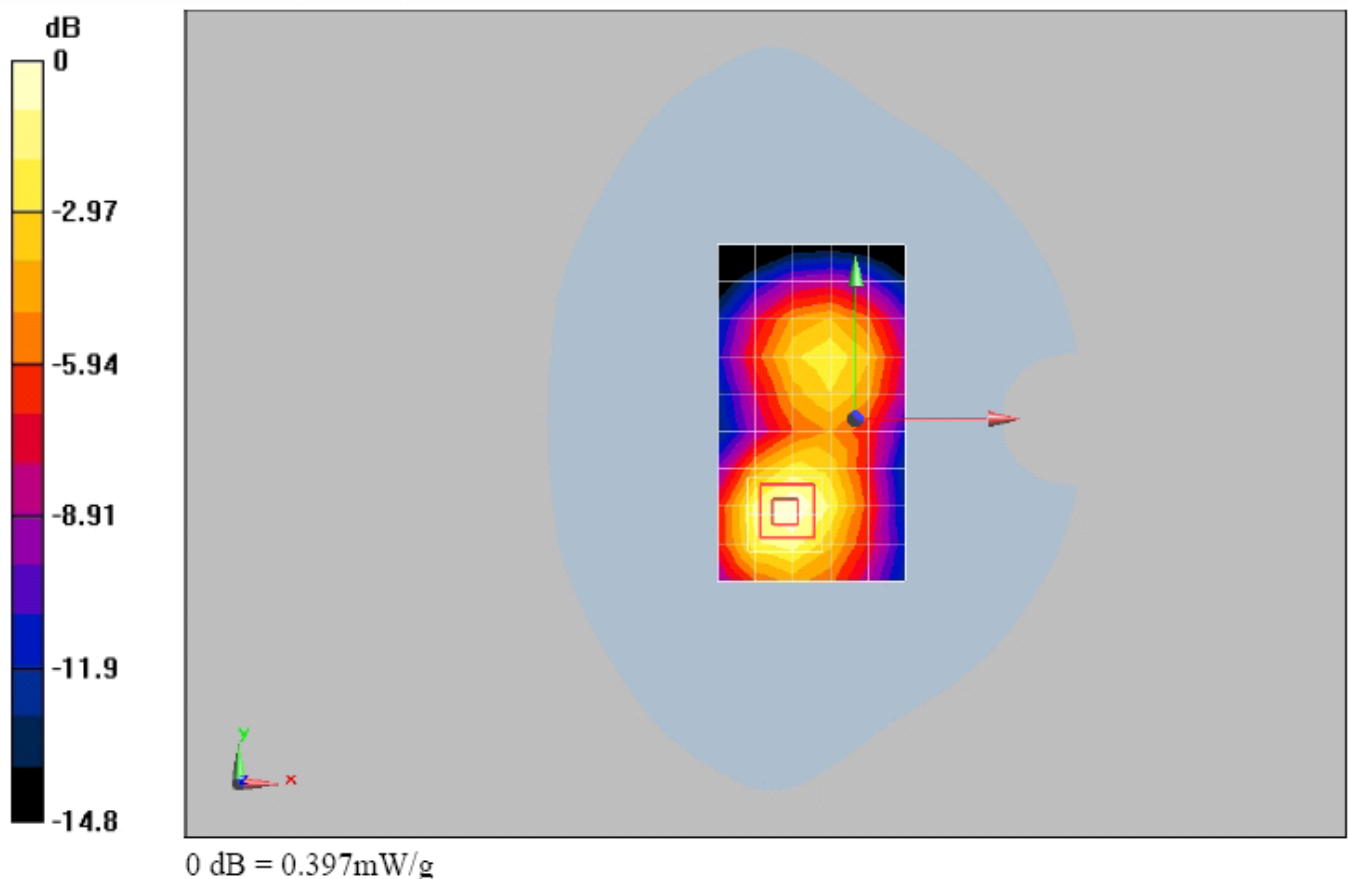SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.216 mW/g**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- GSM1900 GPRS 2TS towards ground**DUT: U3100-5**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.62, 4.62, 4.62); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM1; Type: SAM; Serial: TP-1475

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.417 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.83 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.721 W/kg

SAR(1 g) = 0.441 mW/g; SAR(10 g) = 0.264 mW/g

Maximum value of SAR (measured) = 0.478 mW/g

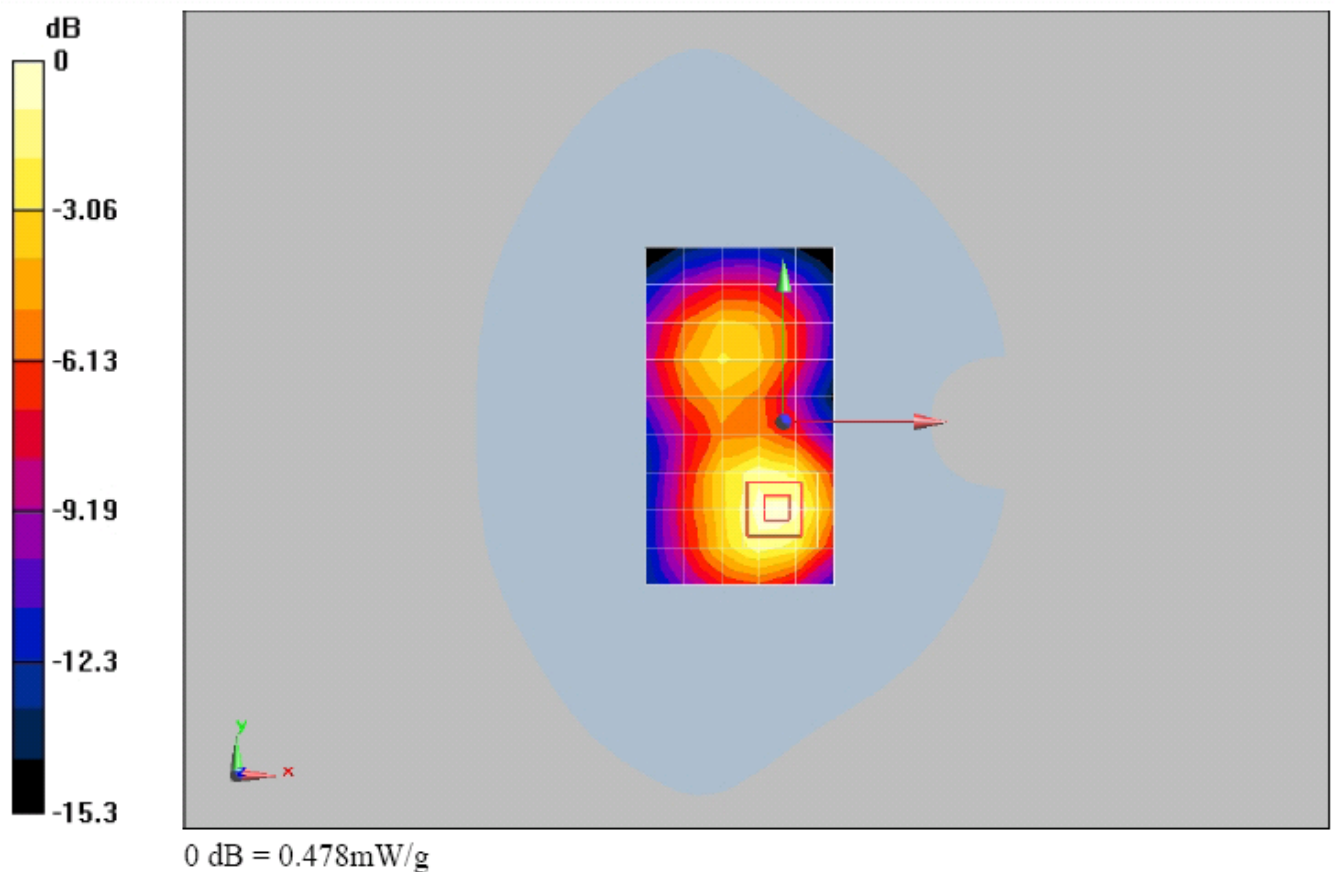**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- GSM1900 GPRS 2TS towards ground**DUT: U3100-5**

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4.1

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.62, 4.62, 4.62); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM1; Type: SAM; Serial: TP-1475

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.359 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.95 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.609 W/kg

SAR(1 g) = 0.375 mW/g; SAR(10 g) = 0.225 mW/g

Maximum value of SAR (measured) = 0.402 mW/g

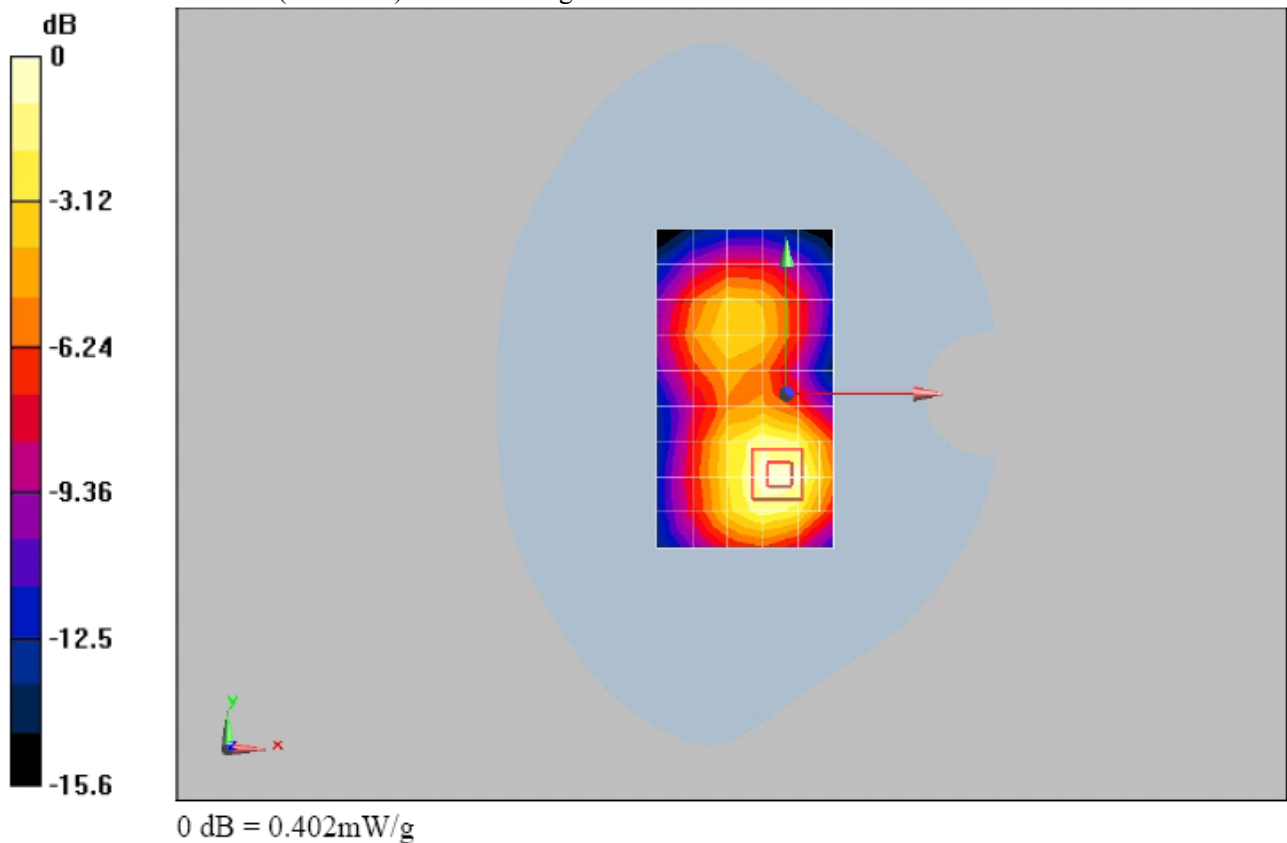**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- GSM1900 GPRS 2TS towards ground**DUT: U3100-5**

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.62, 4.62, 4.62); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.586 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = 0.080 dB

Peak SAR (extrapolated) = 0.952 W/kg

SAR(1 g) = 0.583 mW/g; SAR(10 g) = 0.349 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.633 mW/g

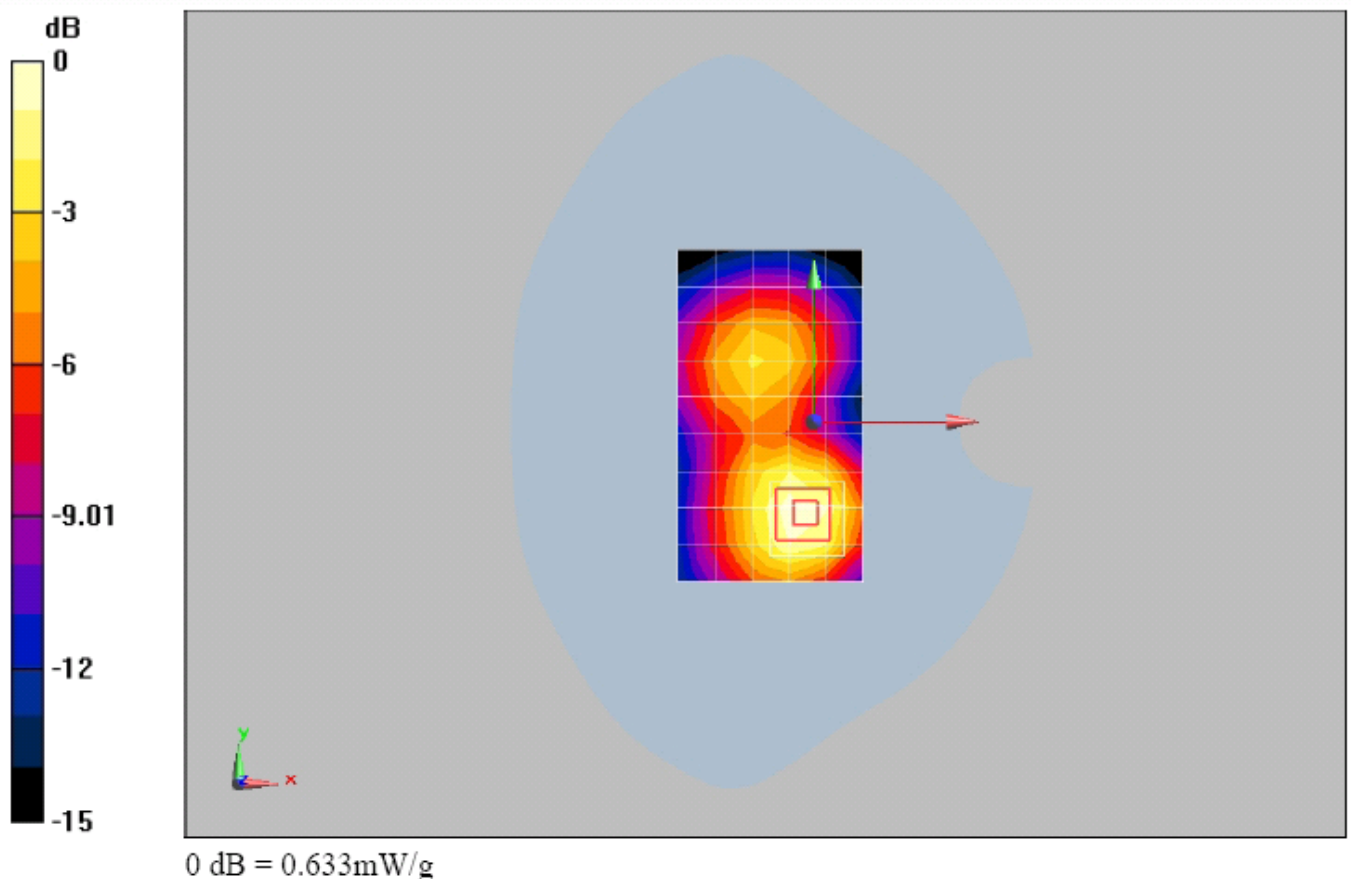**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- GSM1900 towards ground with Headset**DUT: U3100-5**

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.62, 4.62, 4.62); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.267 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.64 V/m; Power Drift = 0.054 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.163 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.297 mW/g

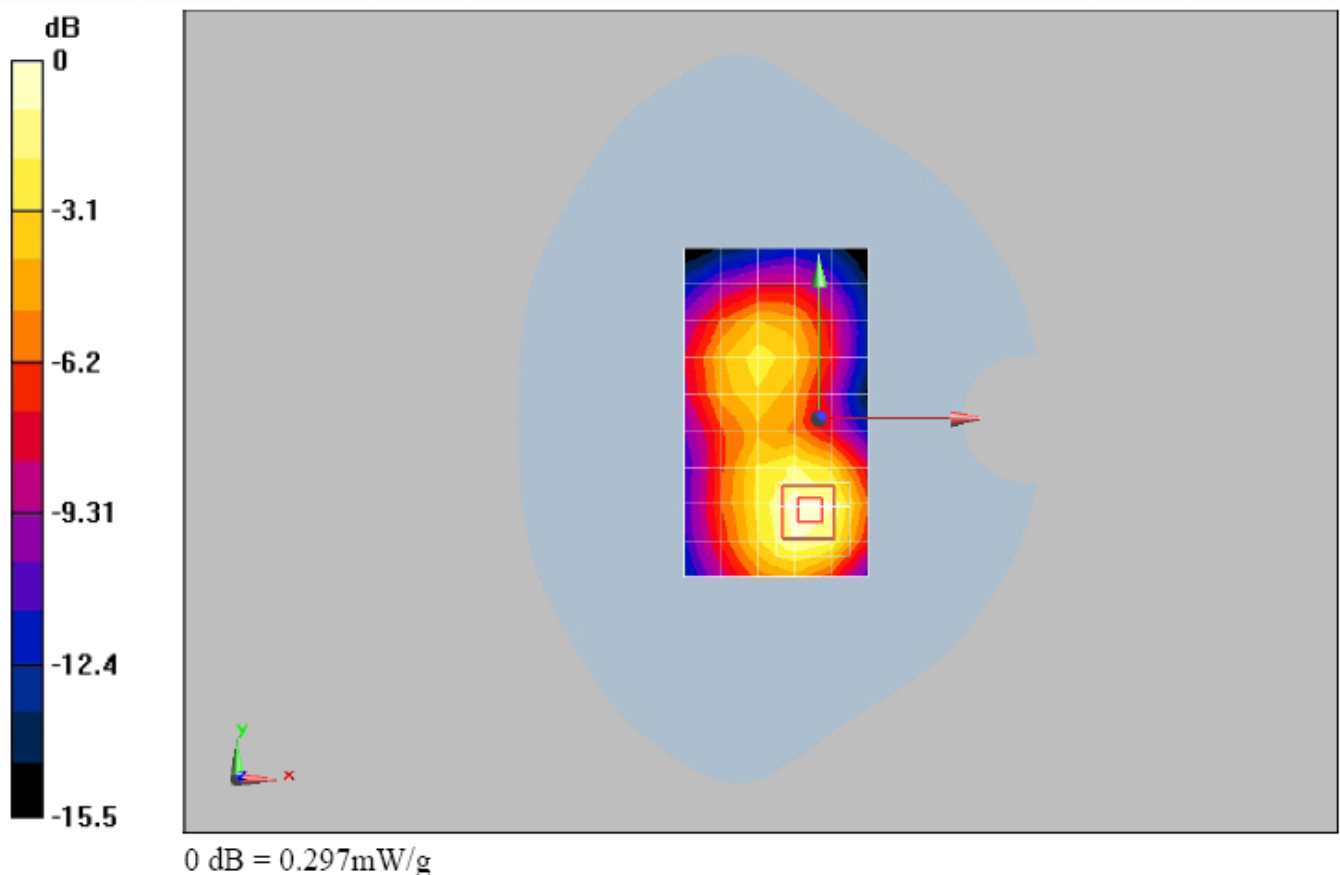**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- GSM1900 towards ground with Bluetooth Headset**DUT: U3100-5**

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.62, 4.62, 4.62); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.300 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.41 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.180 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.329 mW/g

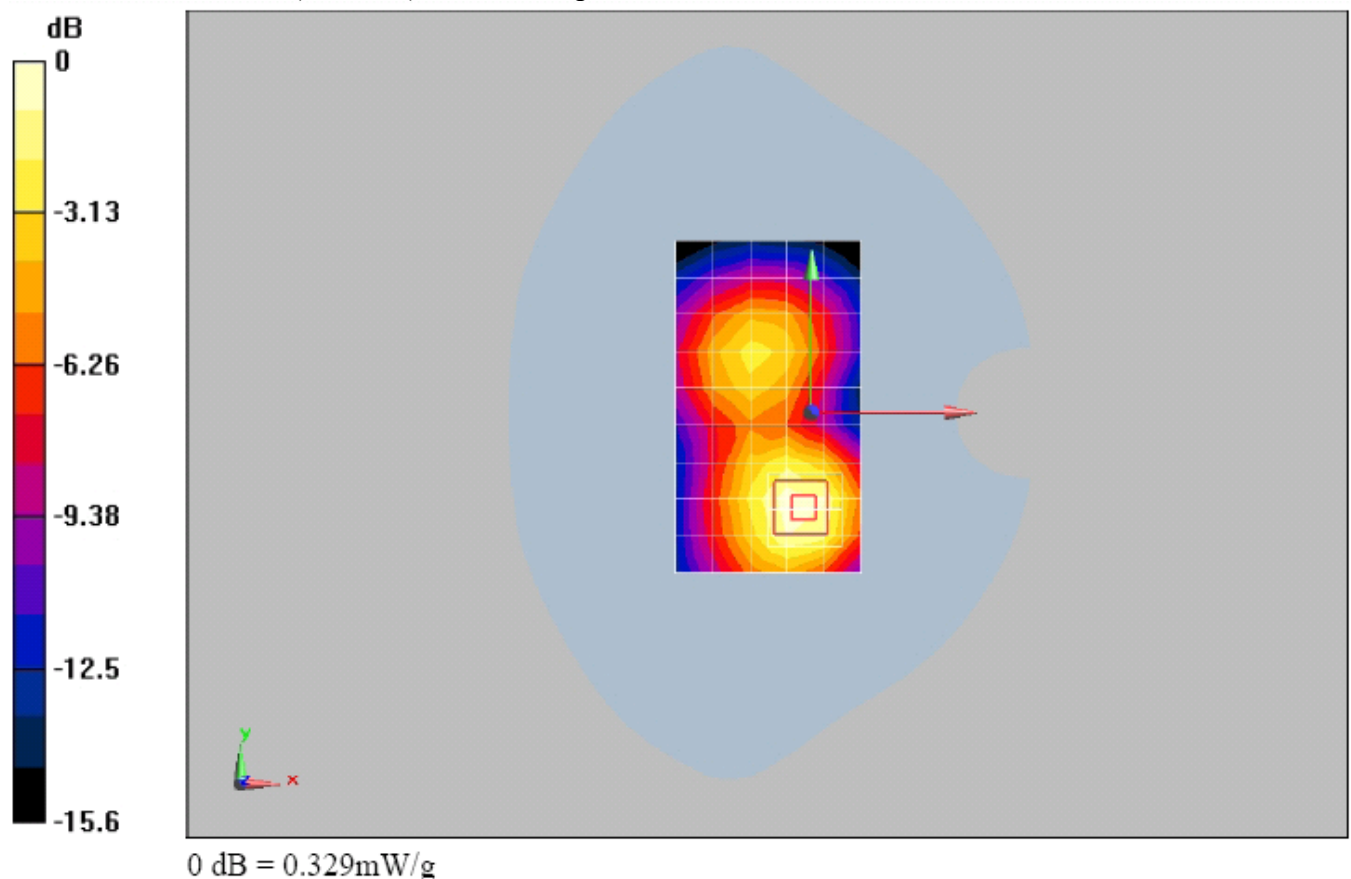**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

Test report no.: SYBH(Z-SAR)212012010

Annex 2.7 UMTS (WCDMA) FDD II 1900MHz head

Date/Time: 2010-01-24 09:20:32

P1528_OET65_EN62209-LeftHandSide touched -WCDMA FDD II**DUT: U3100-5**

Communication System: WCDMA1900; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM2; Type: SAM; Serial: TP-1474

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.847 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.05 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.841 mW/g; SAR(10 g) = 0.500 mW/g

Maximum value of SAR (measured) = 0.919 mW/g

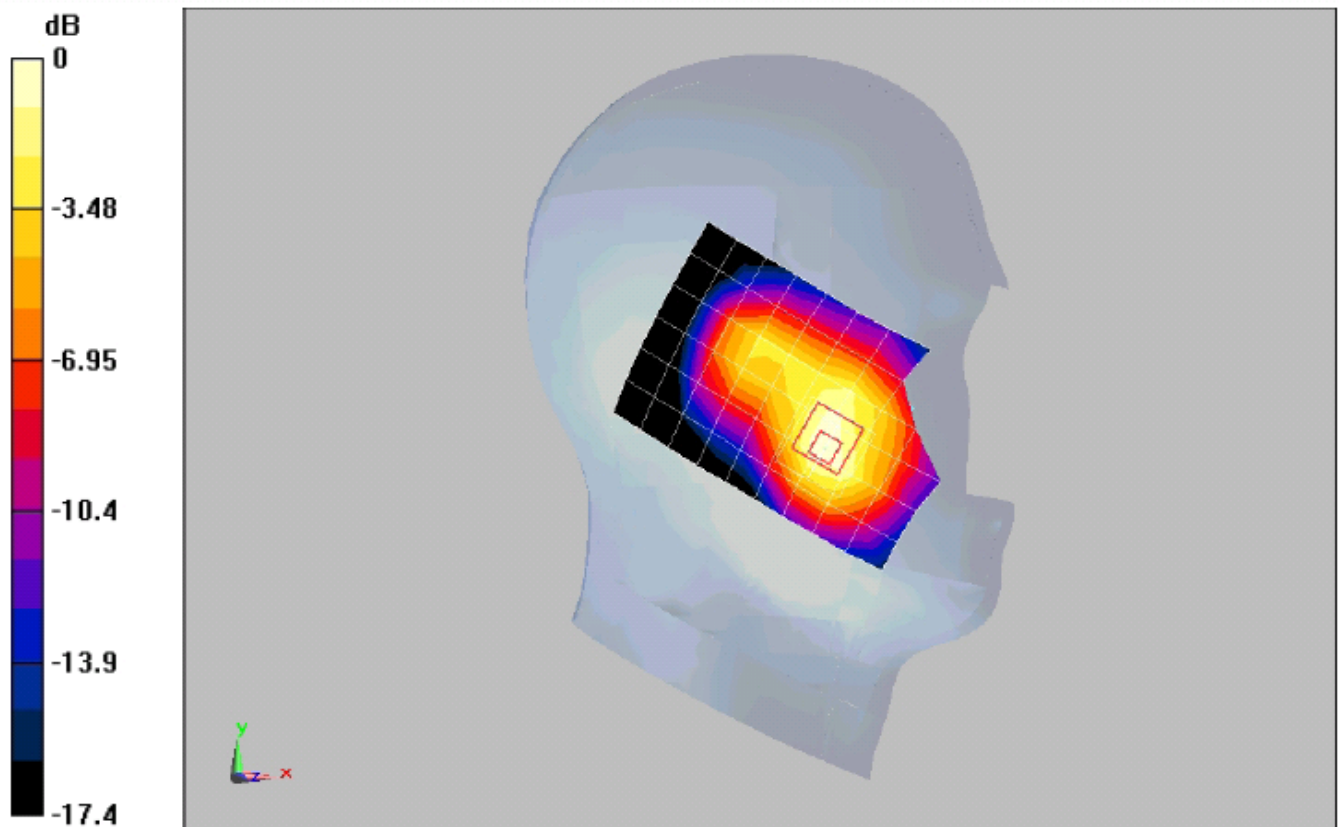

0 dB = 0.919mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209-LeftHandSide tilted 15° - WCDMA FDD II**DUT: U3100-5**

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM2; Type: SAM; Serial: TP-1474

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.365 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = 0.191 dB

Peak SAR (extrapolated) = 0.637 W/kg

SAR(1 g) = 0.409 mW/g; SAR(10 g) = 0.244 mW/g

Maximum value of SAR (measured) = 0.449 mW/g

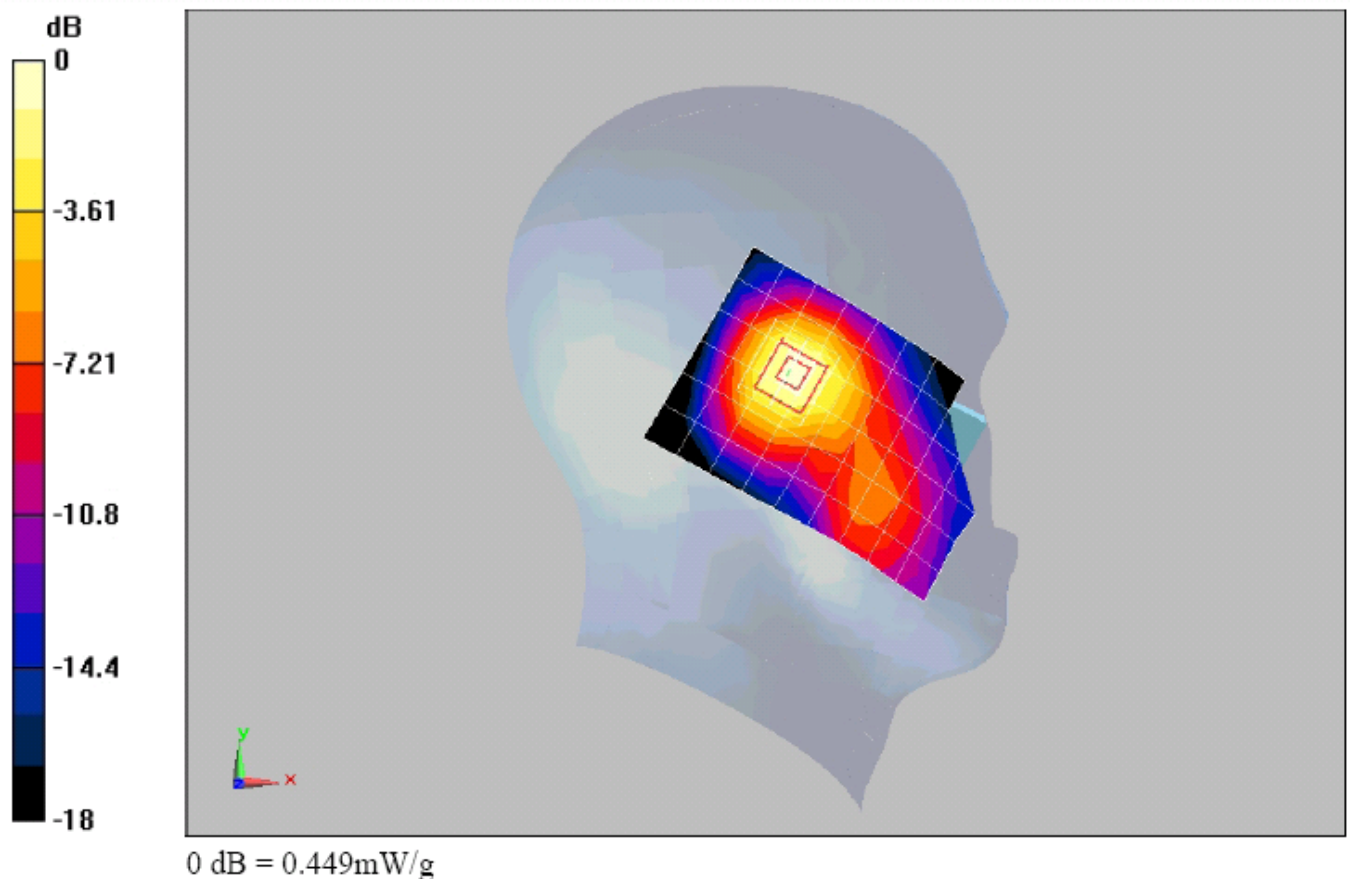**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209-RightHandSide touched -WCDMA FDD II**DUT: U3100-5**

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM2; Type: SAM; Serial: TP-1474

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.835 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.24 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.895 mW/g; SAR(10 g) = 0.534 mW/g

Maximum value of SAR (measured) = 0.988 mW/g

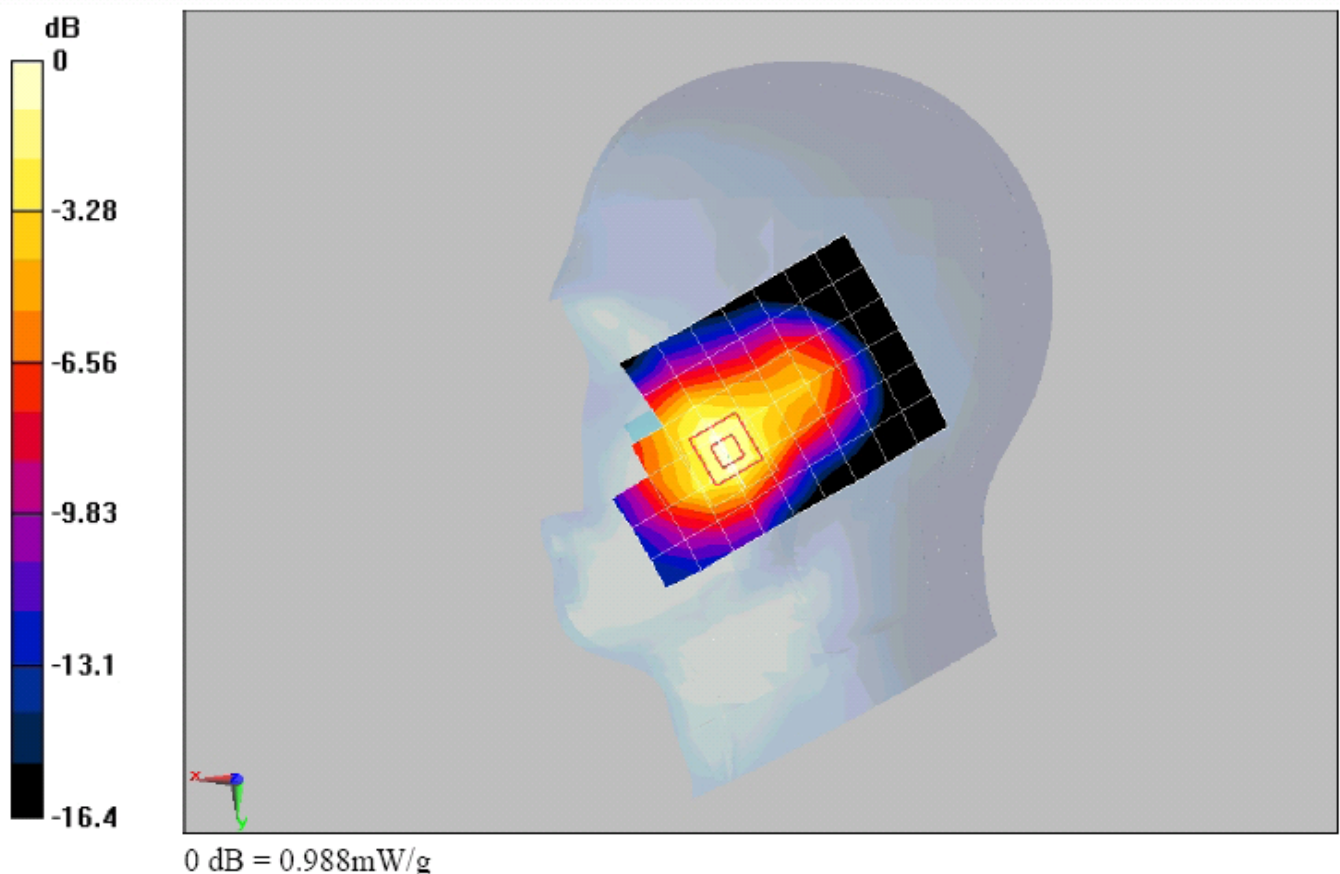**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209-RightHandSide tilted 15° -WCDMA FDD II**DUT: U3100-5**

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM2; Type: SAM; Serial: TP-1474

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.326 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = -0.137 dB

Peak SAR (extrapolated) = 0.467 W/kg

SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.196 mW/g

Maximum value of SAR (measured) = 0.345 mW/g

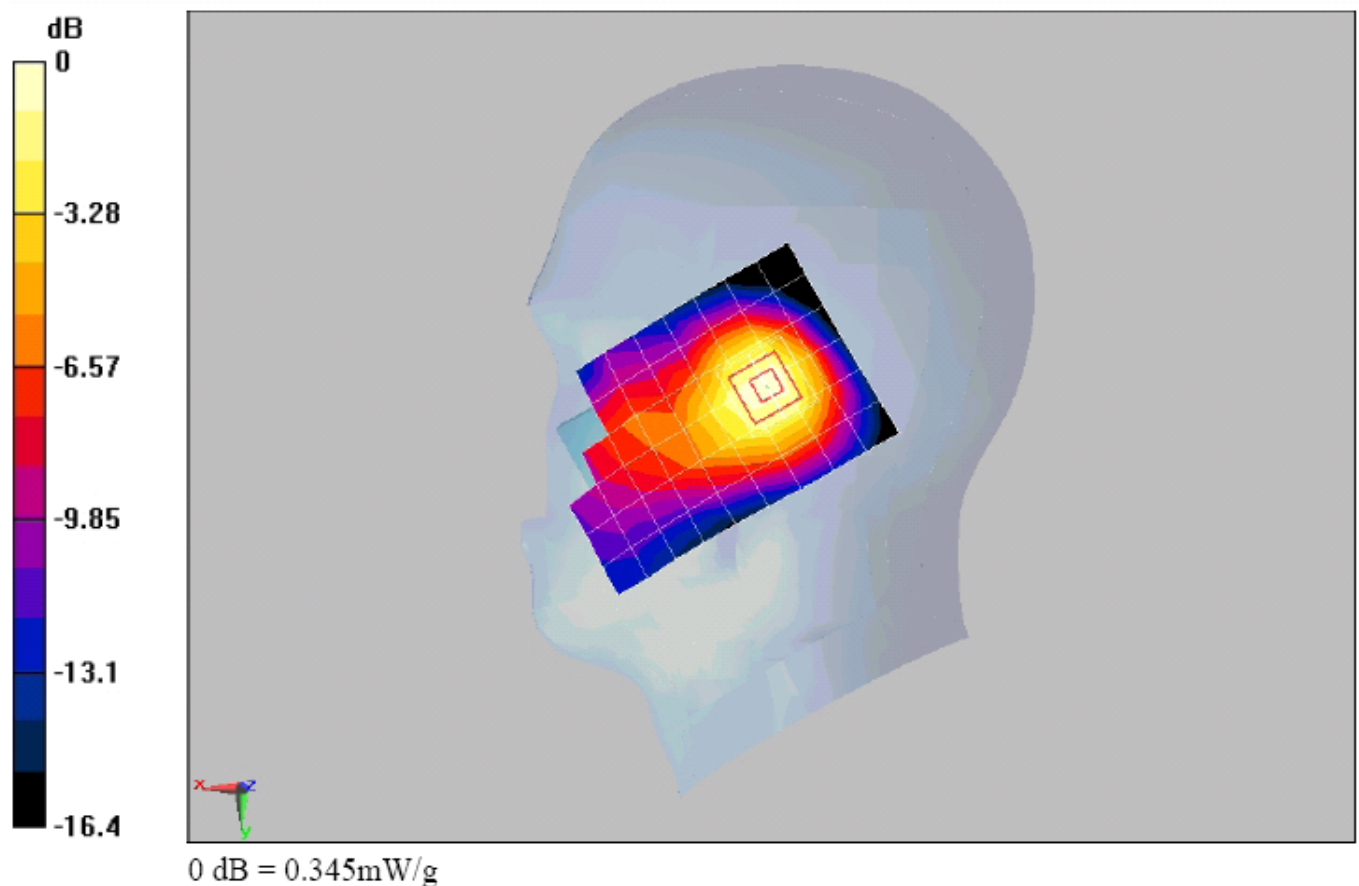**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209-RightHandSide touched -WCDMA FDD II**DUT: U3100-5**

Communication System: WCDMA1900; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.945 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.07 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.872 mW/g; SAR(10 g) = 0.507 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.965 mW/g

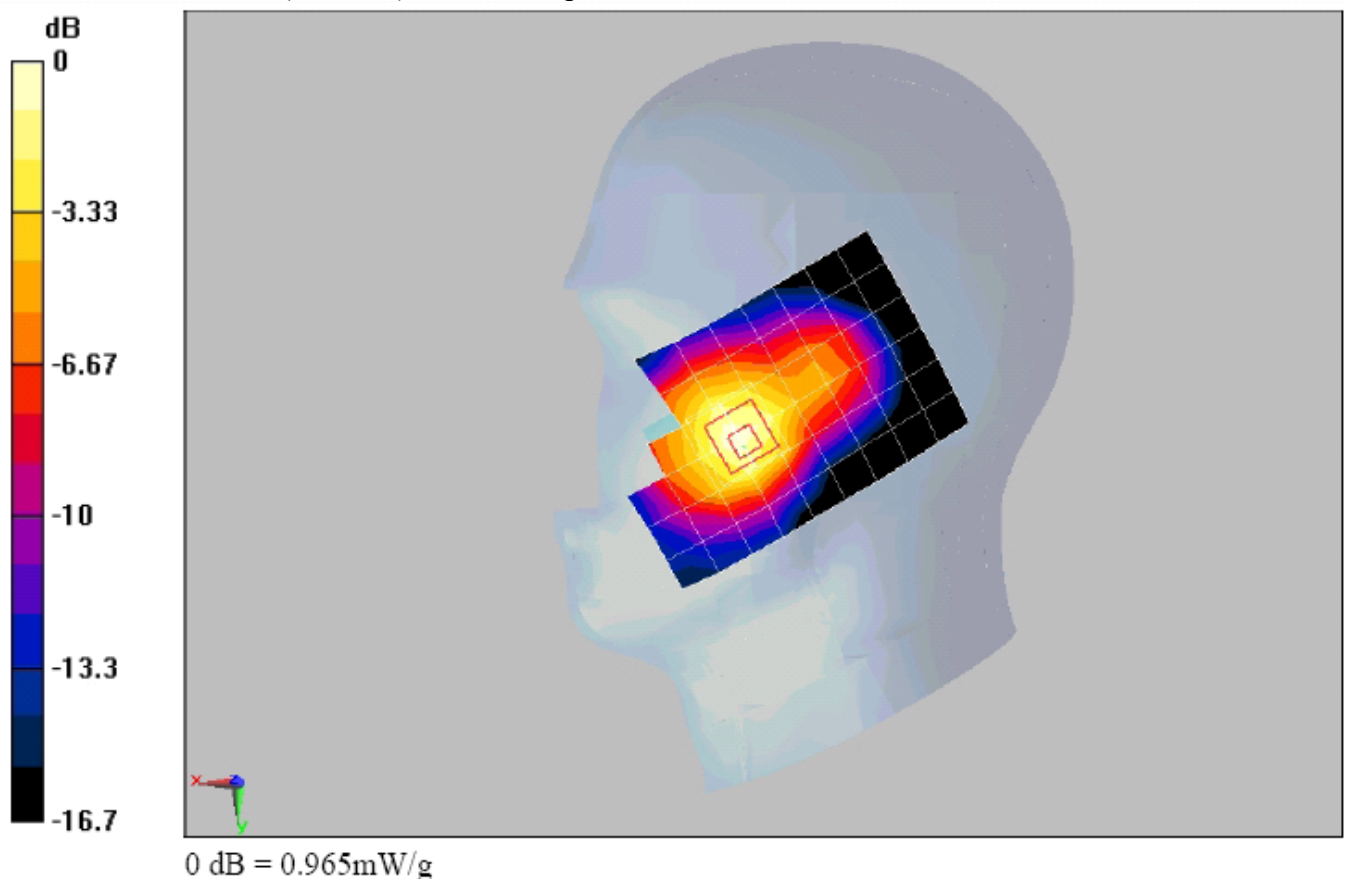**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209-RightHandSide touched -WCDMA FDD II**DUT: U3100-5**

Communication System: WCDMA1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Head/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.12 mW/g


Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.72 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.638 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.19 mW/g

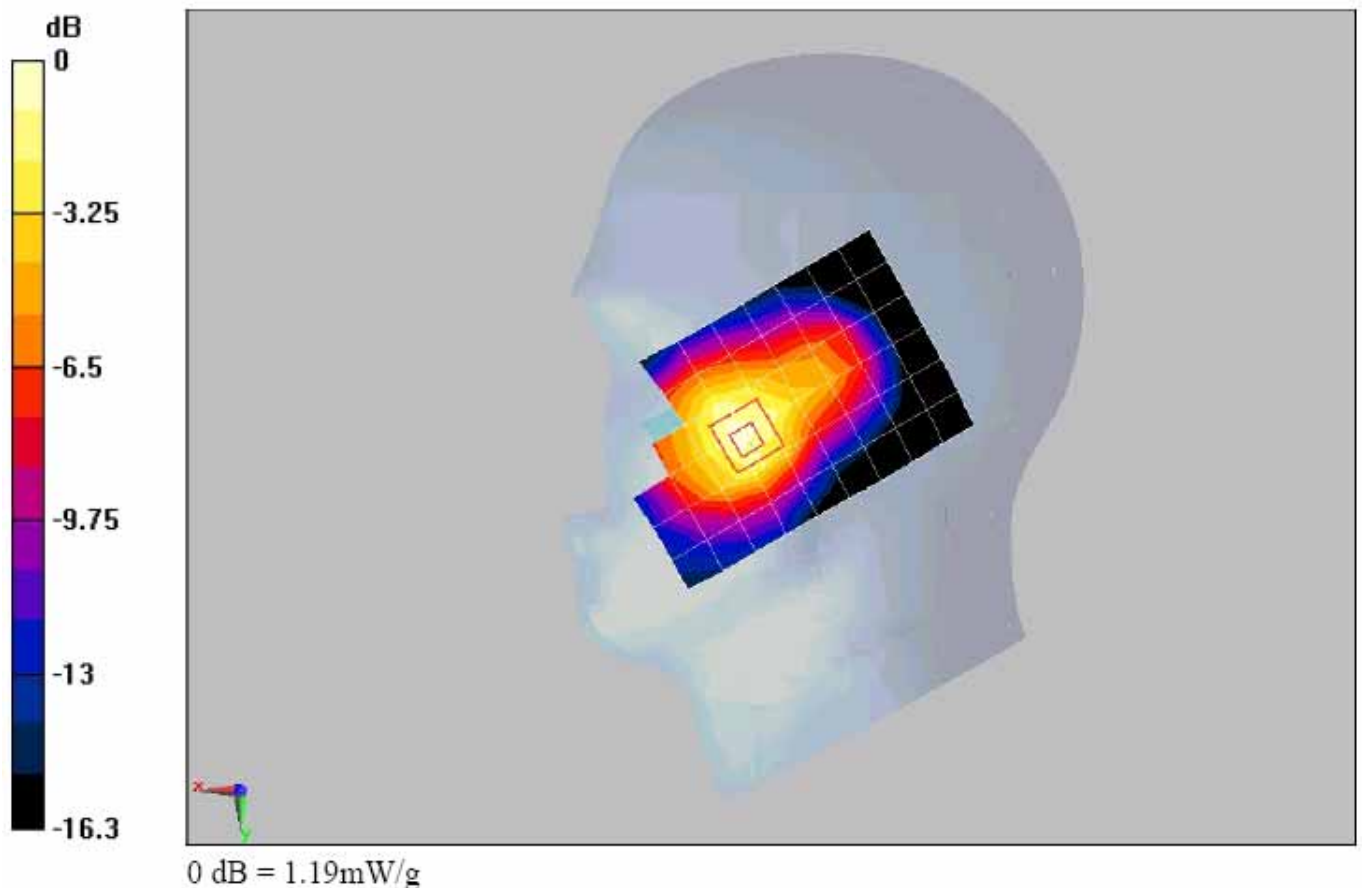**Additional information:**

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.0°C; liquid temperature: 21.5°C

Annex 2.8 UMTS (WCDMA) FDD II 1900MHz body

Date/Time: 2010-01-28 9:21:12

P1528_OET65_EN62209- WCDMA FDD II towards phantom**DUT: U3100-5**

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.62, 4.62, 4.62); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM1; Type: SAM; Serial: TP-1475

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.294 mW/g

body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.41 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.488 W/kg

SAR(1 g) = 0.303 mW/g; SAR(10 g) = 0.179 mW/g

Maximum value of SAR (measured) = 0.327 mW/g


body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.41 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.124 mW/g

Maximum value of SAR (measured) = 0.209 mW/g

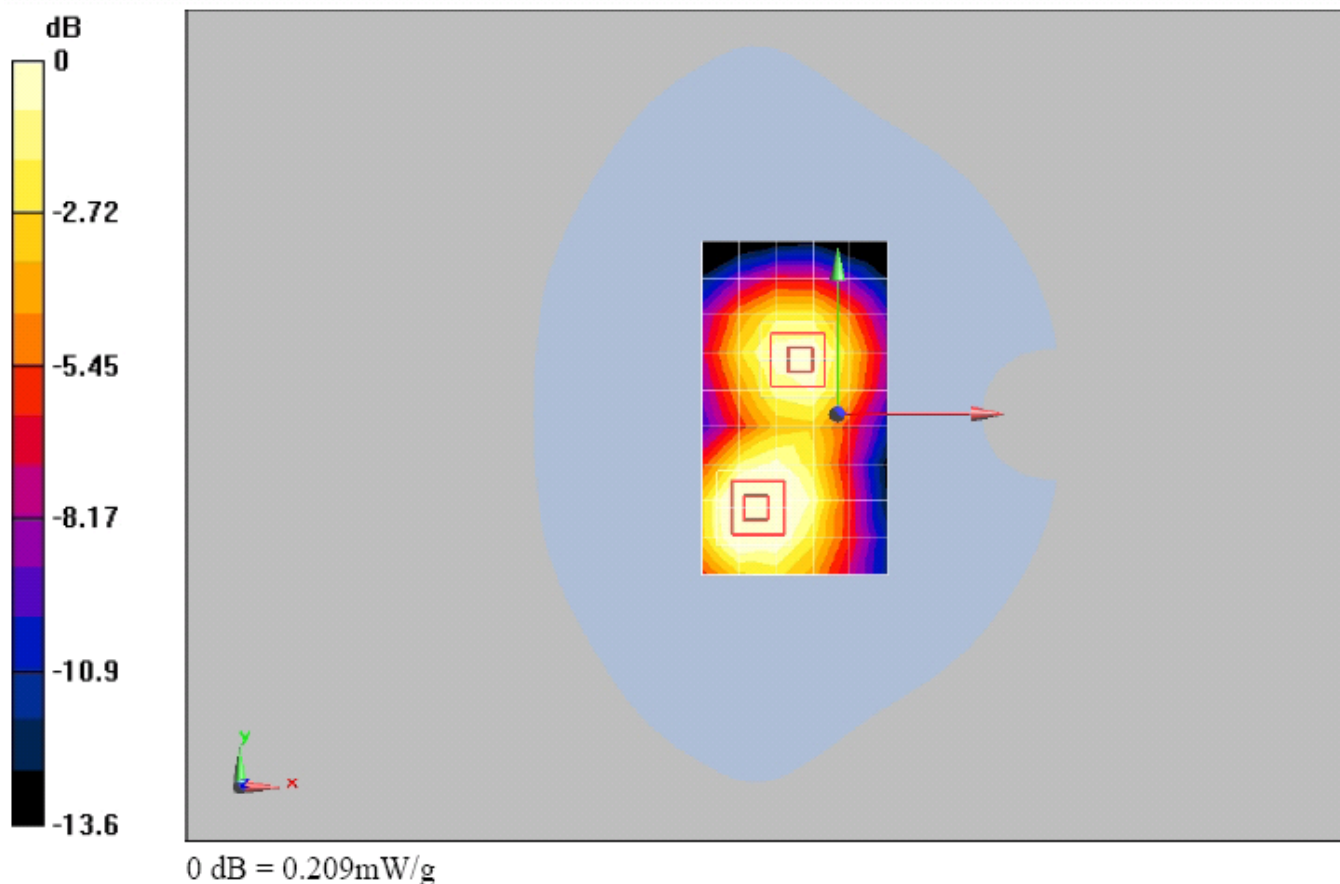**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- WCDMA FDD II towards ground**DUT: U3100-5**

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.62, 4.62, 4.62); Calibrated: 12/18/2009

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn851; Calibrated: 5/14/2009

- Phantom: SAM1; Type: SAM; Serial: TP-1475

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.358 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.66 V/m; Power Drift = 0.145 dB

Peak SAR (extrapolated) = 0.592 W/kg

SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.217 mW/g

Maximum value of SAR (measured) = 0.392 mW/g

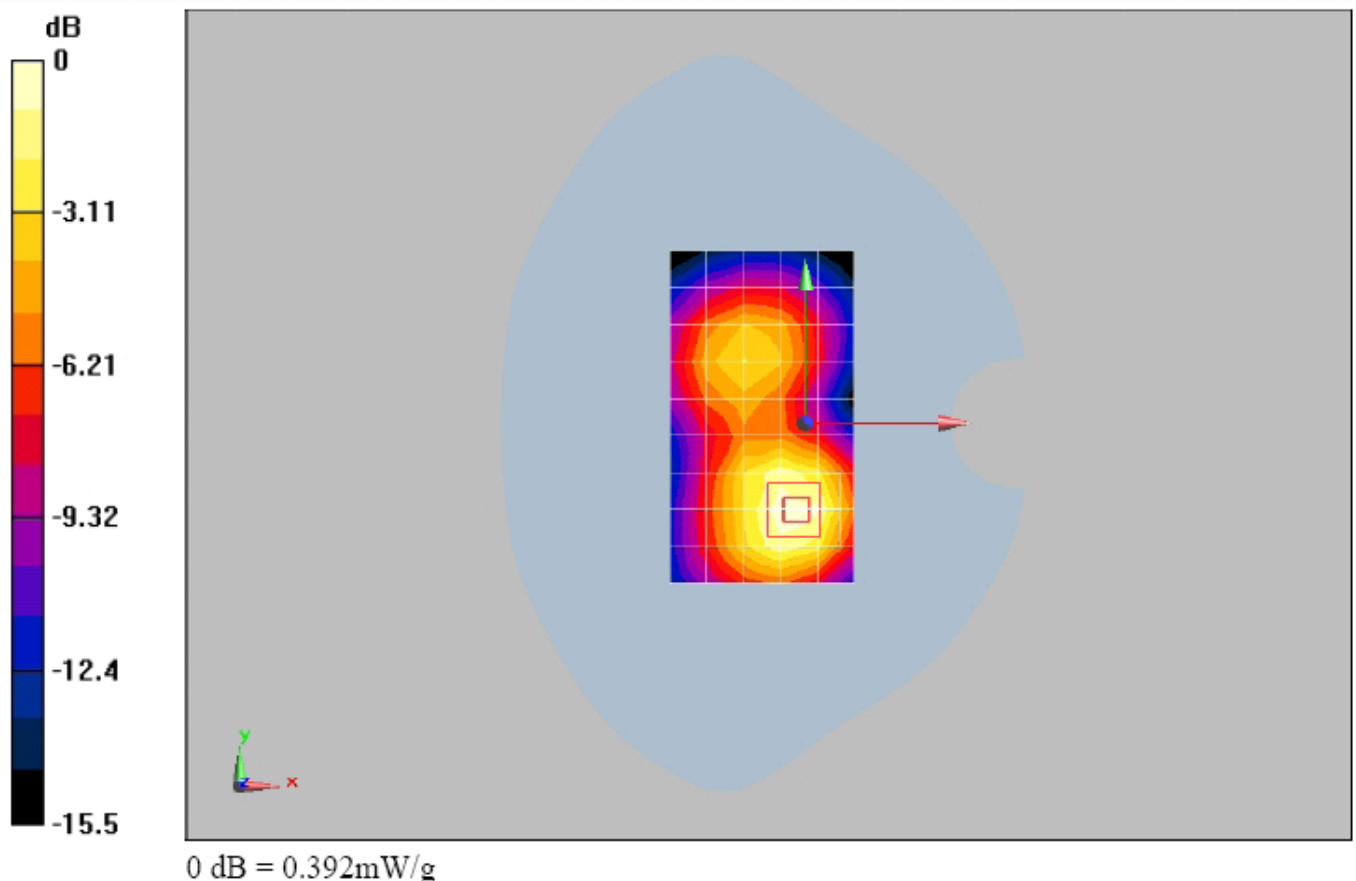**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- WCDMA FDD II towards ground**DUT: U3100-5**

Communication System: WCDMA1900; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.62, 4.62, 4.62); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.298 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.67 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 0.492 W/kg

SAR(1 g) = 0.297 mW/g; SAR(10 g) = 0.176 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.318 mW/g

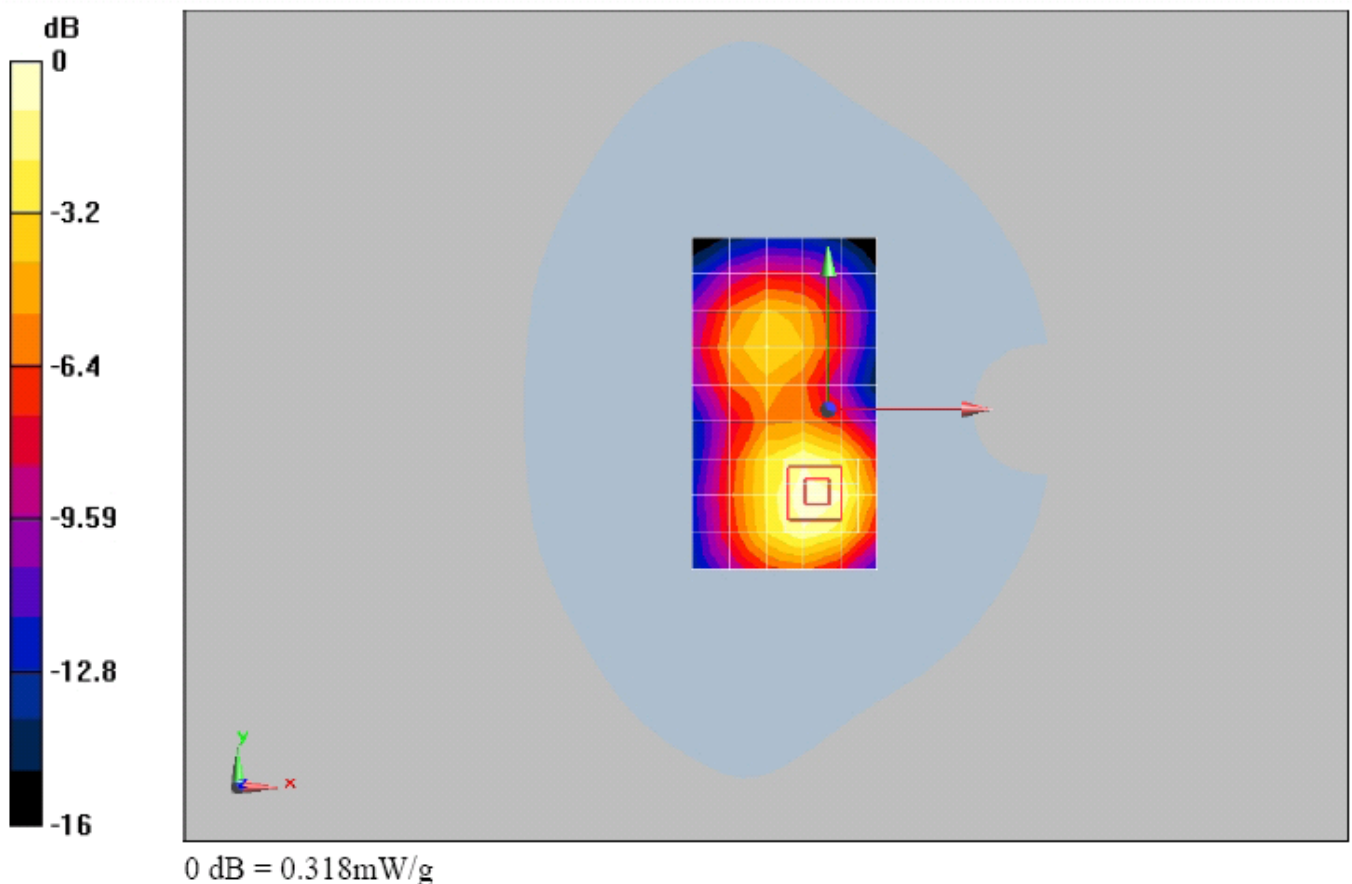**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- WCDMA FDD II towards ground**DUT: U3100-5**

Communication System: WCDMA1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.62, 4.62, 4.62); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.409 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.57 V/m; Power Drift = 0.066 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.381 mW/g; SAR(10 g) = 0.229 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.410 mW/g

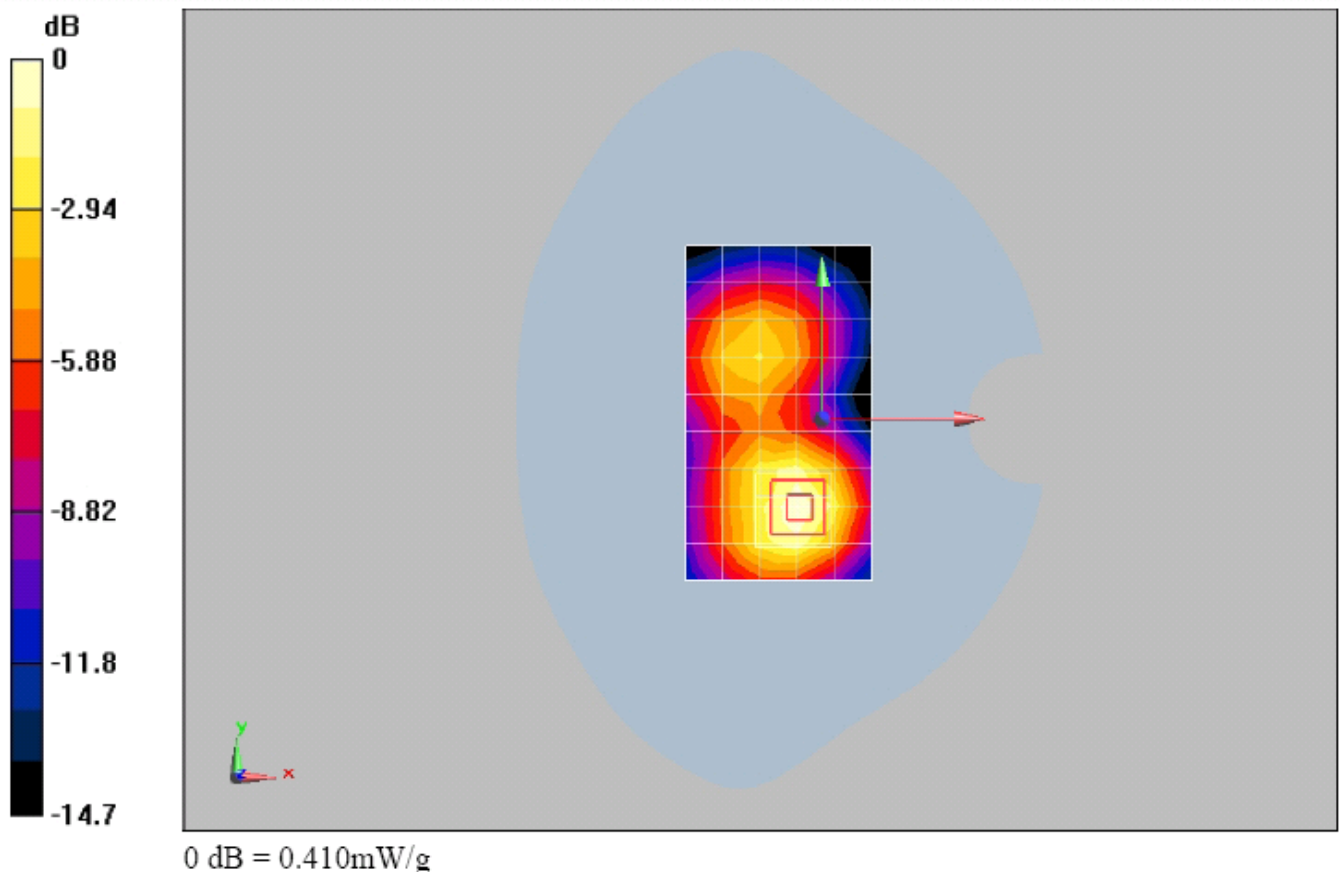**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- WCDMA FDD II towards ground with Headset**DUT: U3100-5**

Communication System: WCDMA1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.62, 4.62, 4.62); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.362 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.09 V/m; Power Drift = 0.101 dB

Peak SAR (extrapolated) = 0.549 W/kg

SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.200 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.364 mW/g

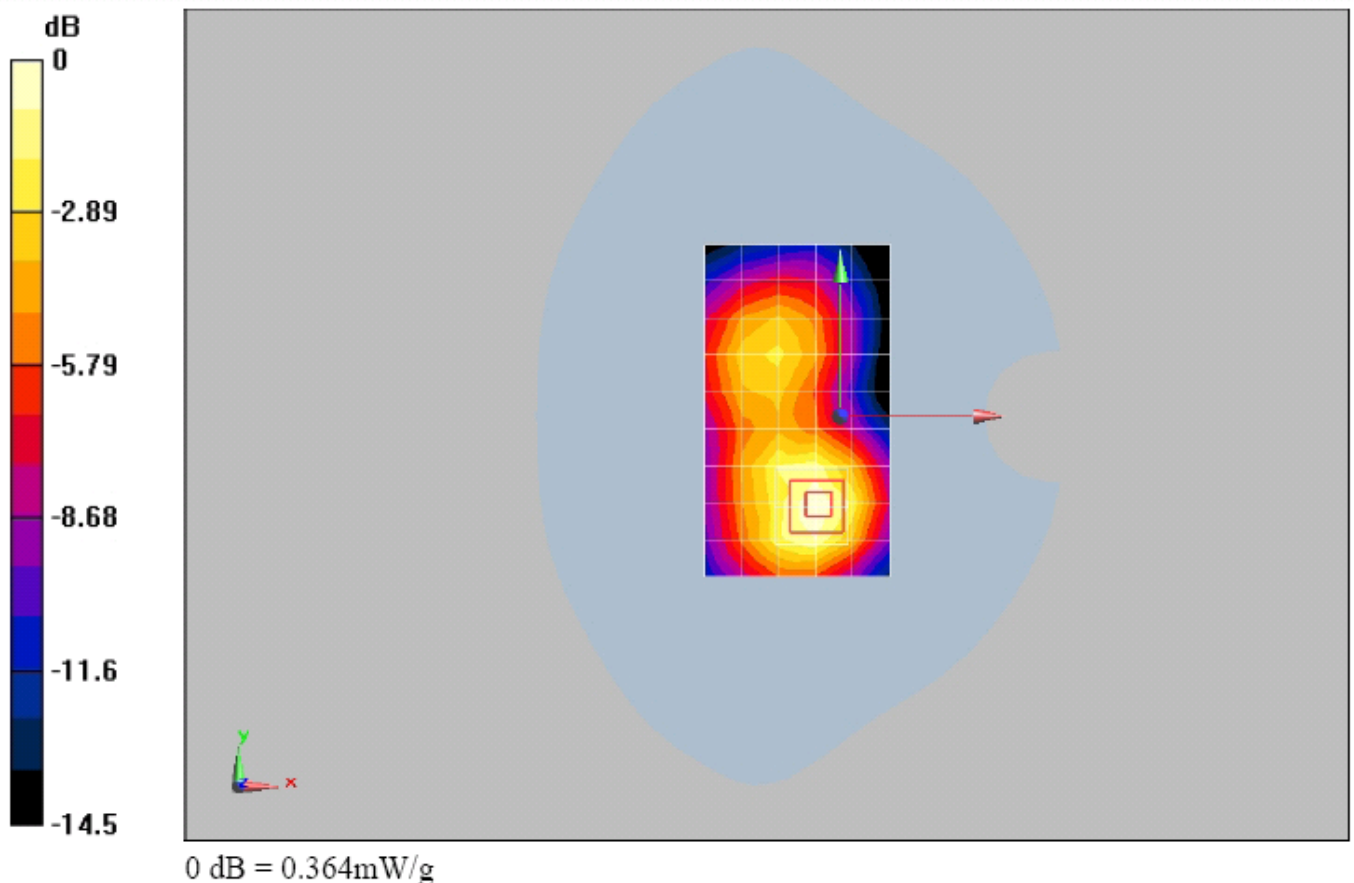**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm

ambient temperature: 22.0°C; liquid temperature: 21.5°C

P1528_OET65_EN62209- WCDMA FDD II towards ground with Bluetooth Headset**DUT: U3100-5**

Communication System: WCDMA1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.62, 4.62, 4.62); Calibrated: 12/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 5/14/2009
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.428 mW/g


body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.99 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = 0.395 mW/g; SAR(10 g) = 0.237 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.431 mW/g

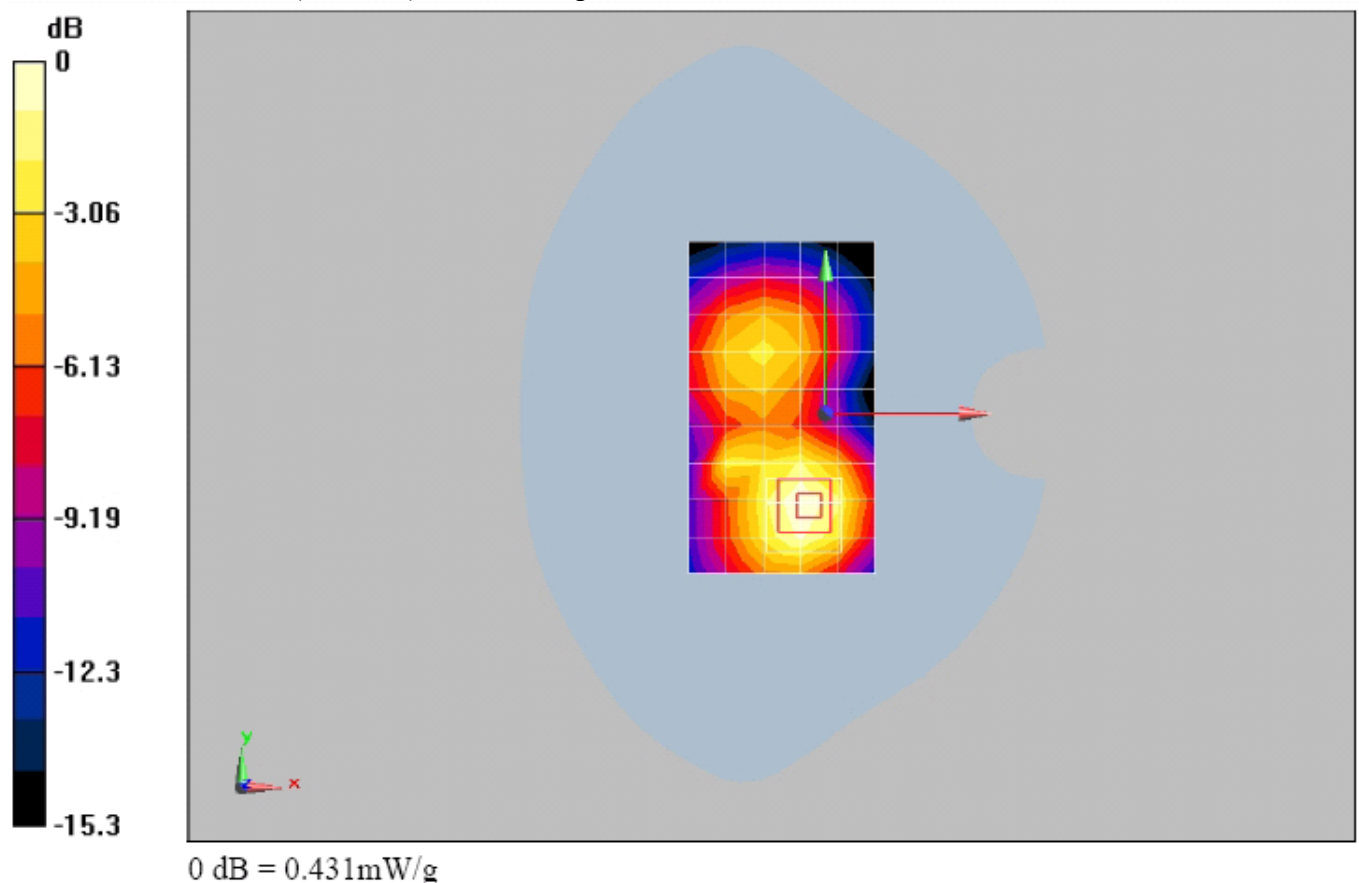**Additional information:**

position or distance of DUT to SAM (if not standard head positions) : 15 mm


ambient temperature: 22.0°C; liquid temperature: 21.5°C




Annex 2.9 Z-axis scans

GSM850 head:

U3100-5 LeftHandSide touched- GSM850 Channel 190

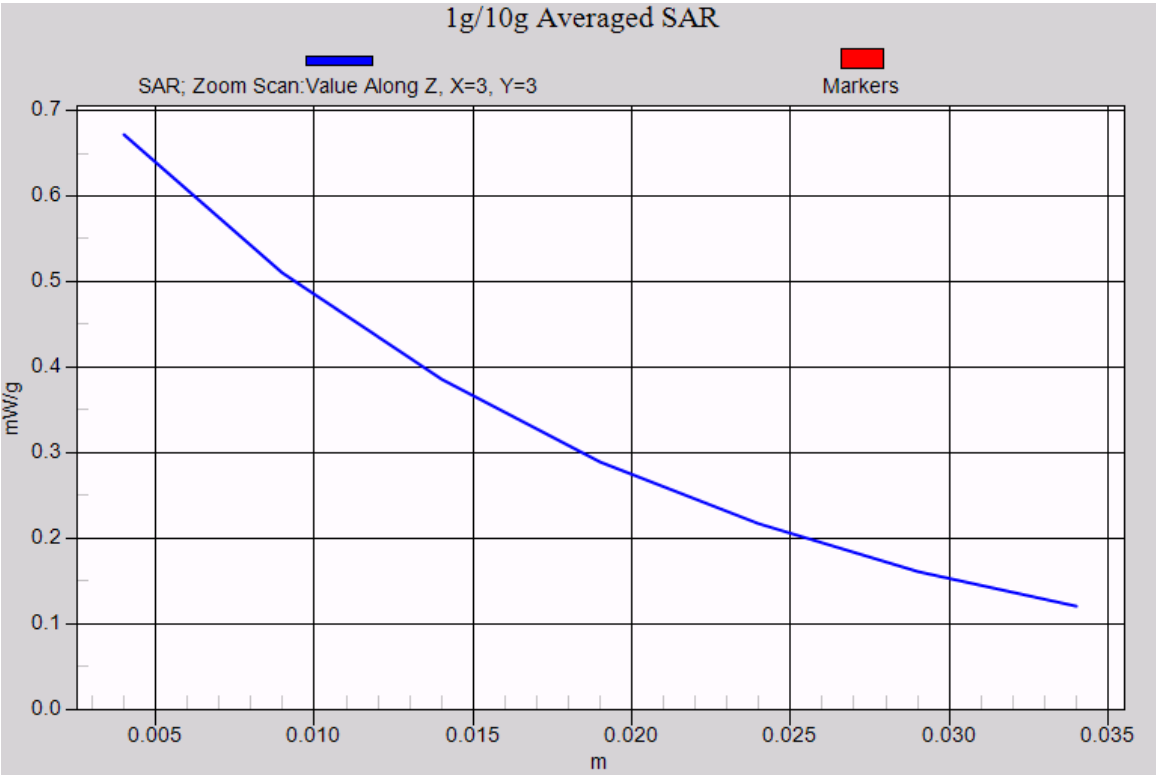


U3100-5 LeftHandSide tilted 15°- GSM1850 Channel 190

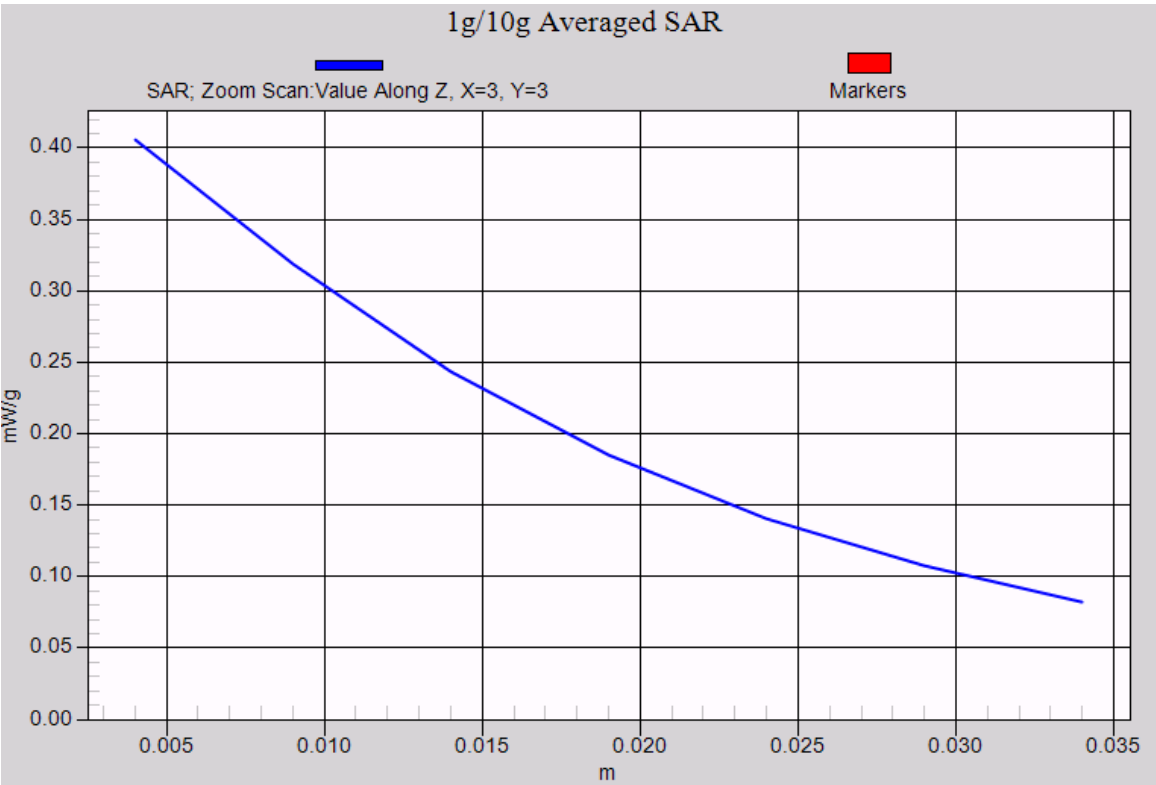




U3100-5 RightHandSide touched- GSM850 Channel 190

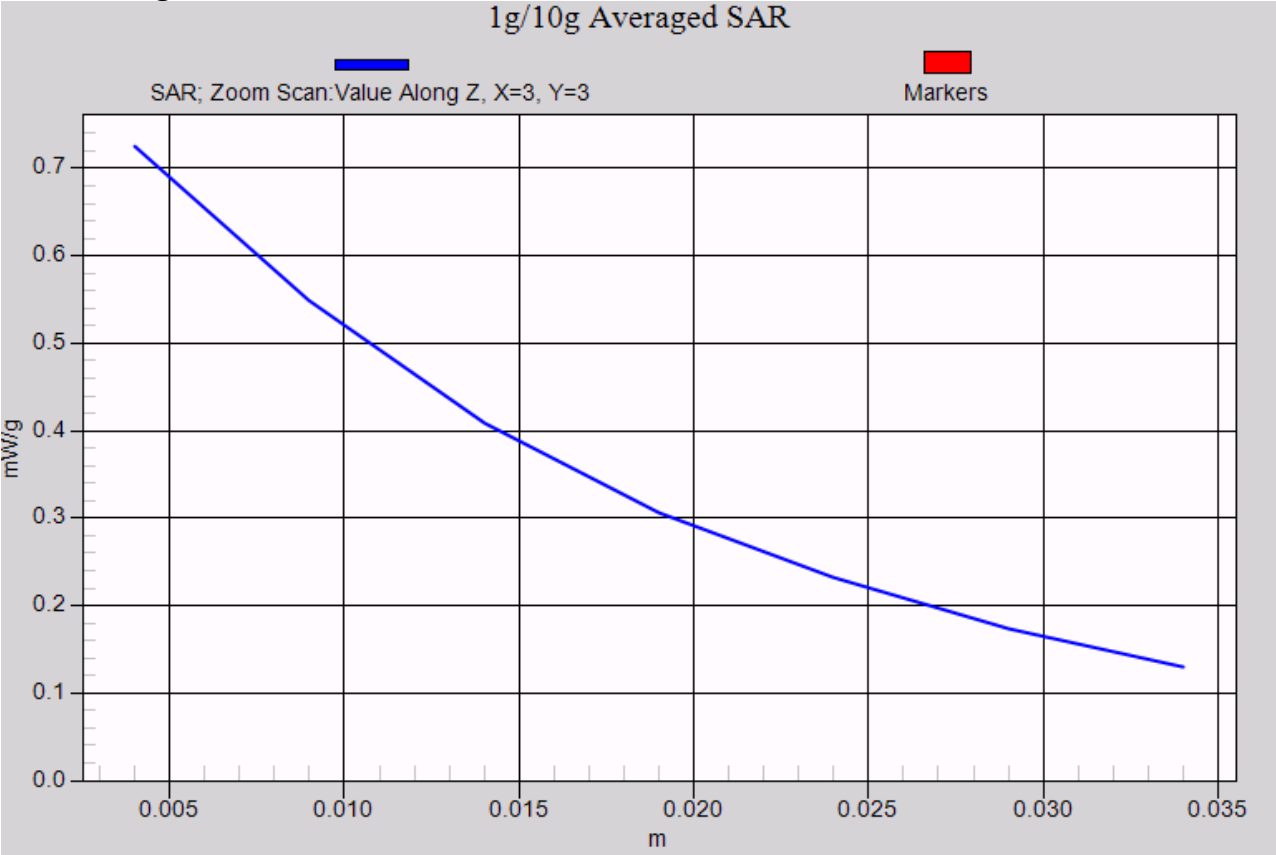


U3100-5 RightHandSide titled 15°- GSM850 Channel 190

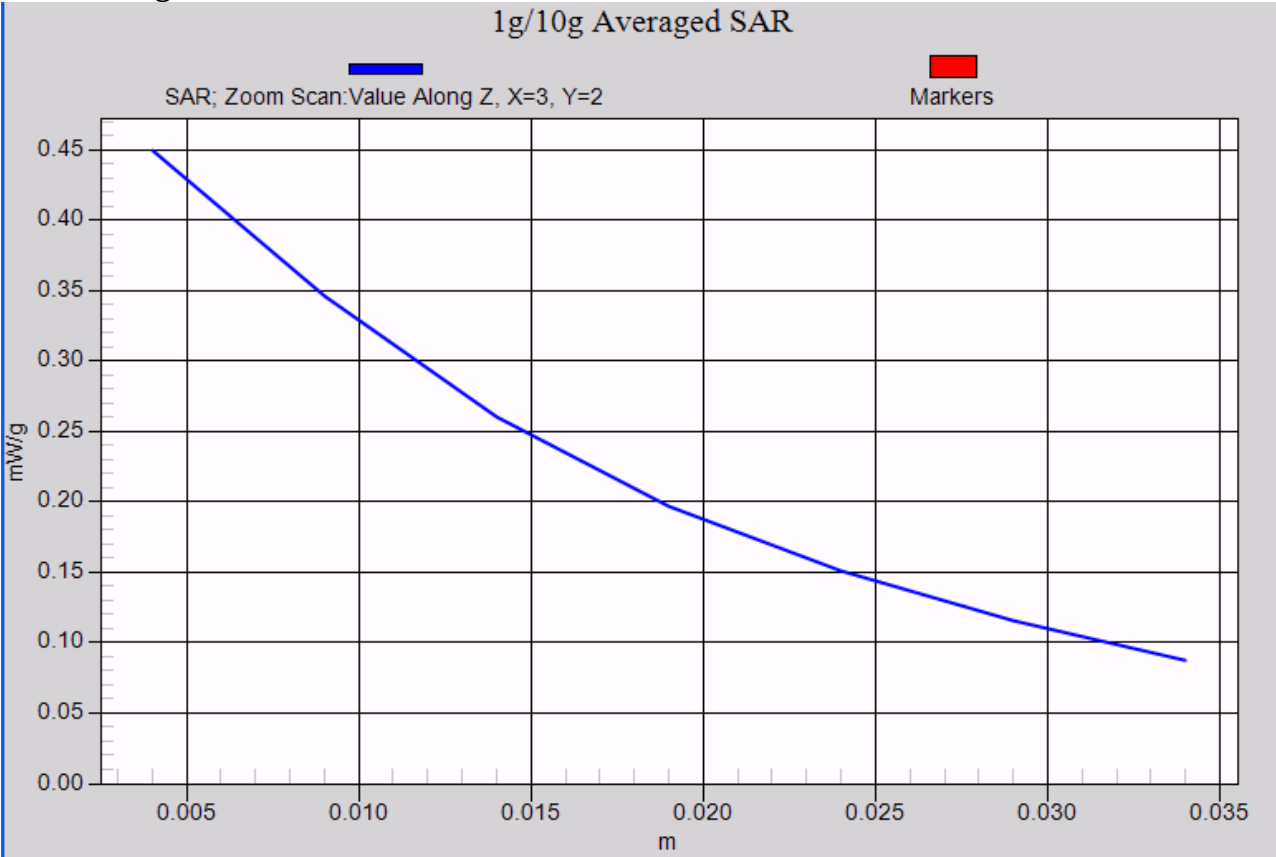




U3100-5 RightHandSide touched- GSM850 Channel 251

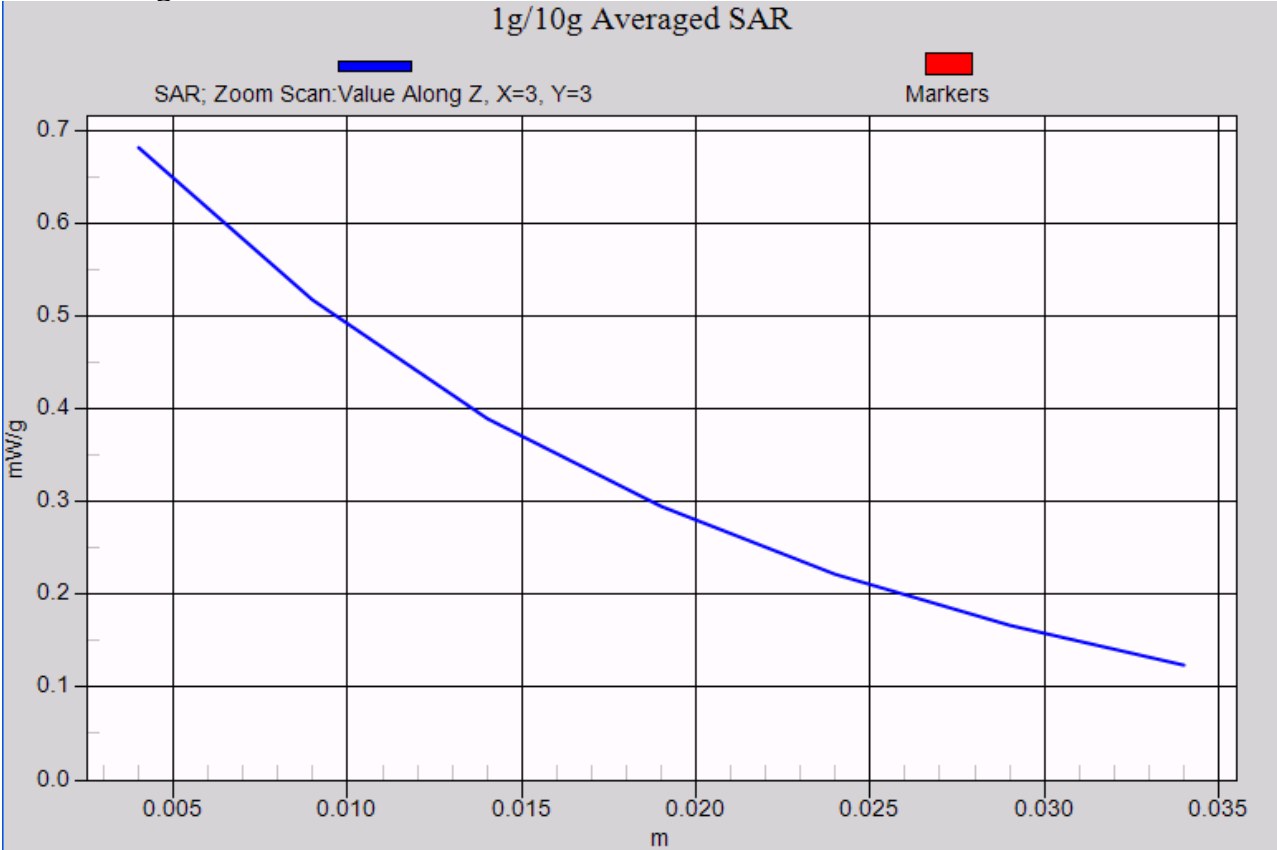


U3100-5 RightHandSide touched GSM850 Channel 128

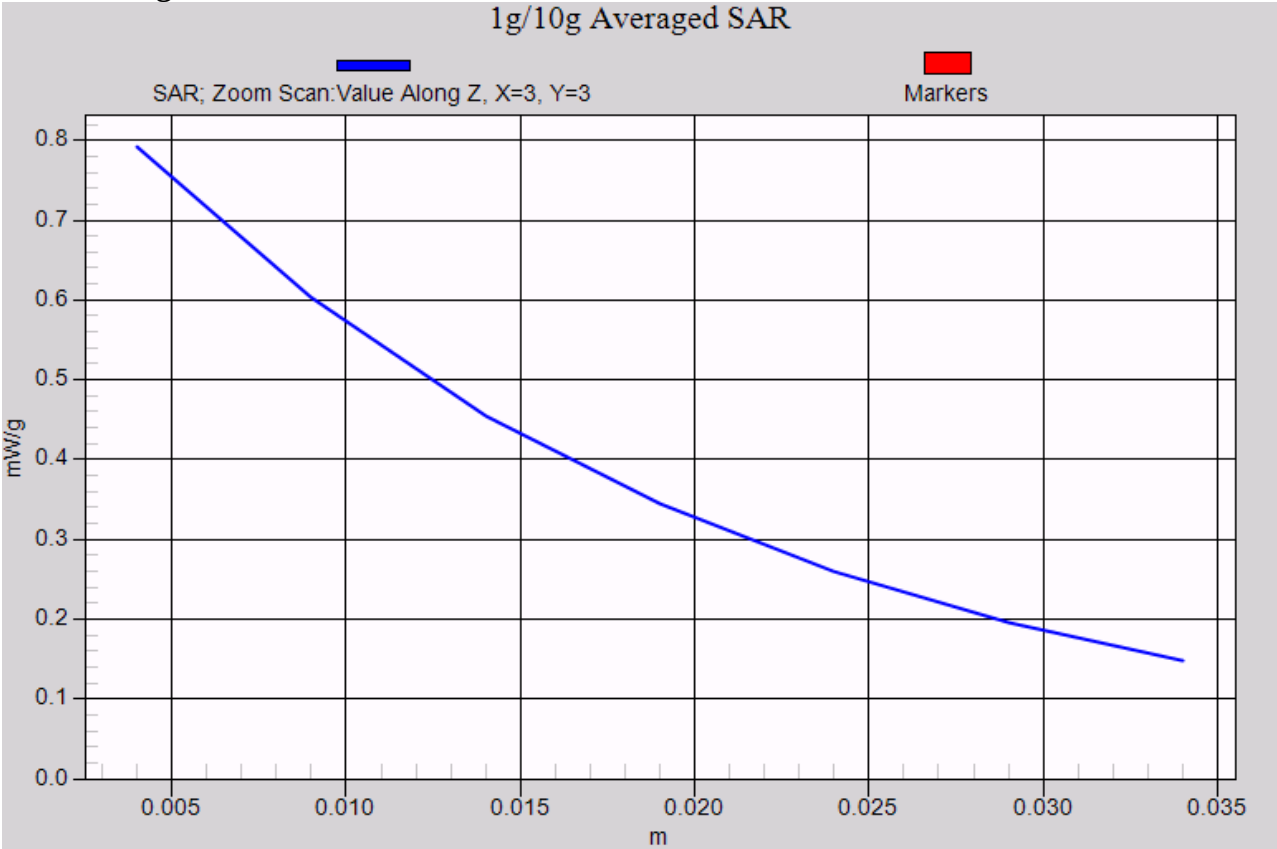




GSM850 body:

U3100-5 towards phantom- GSM850 GPRS 2TS Channel 190
1g/10g Averaged SAR

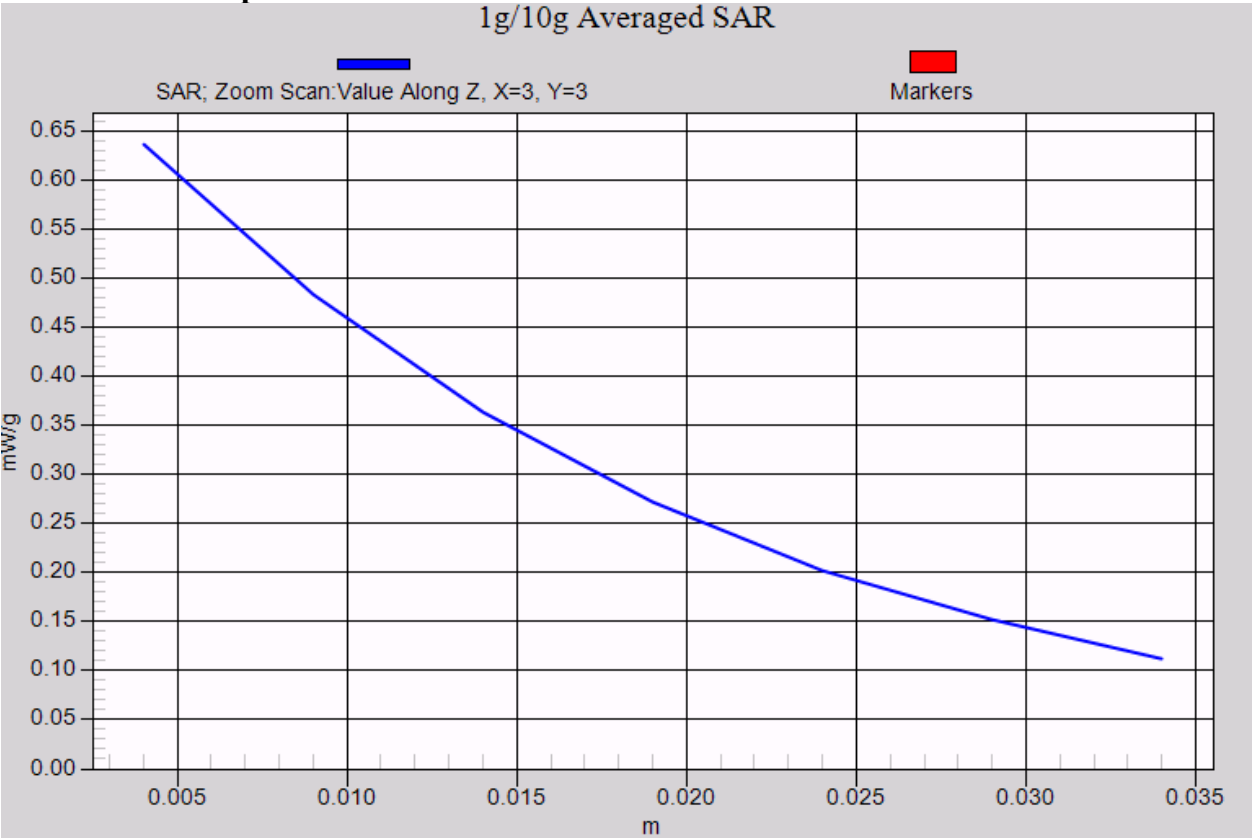


U3100-5 towards ground- GSM850 GPRS 2TS Channel 190
1g/10g Averaged SAR

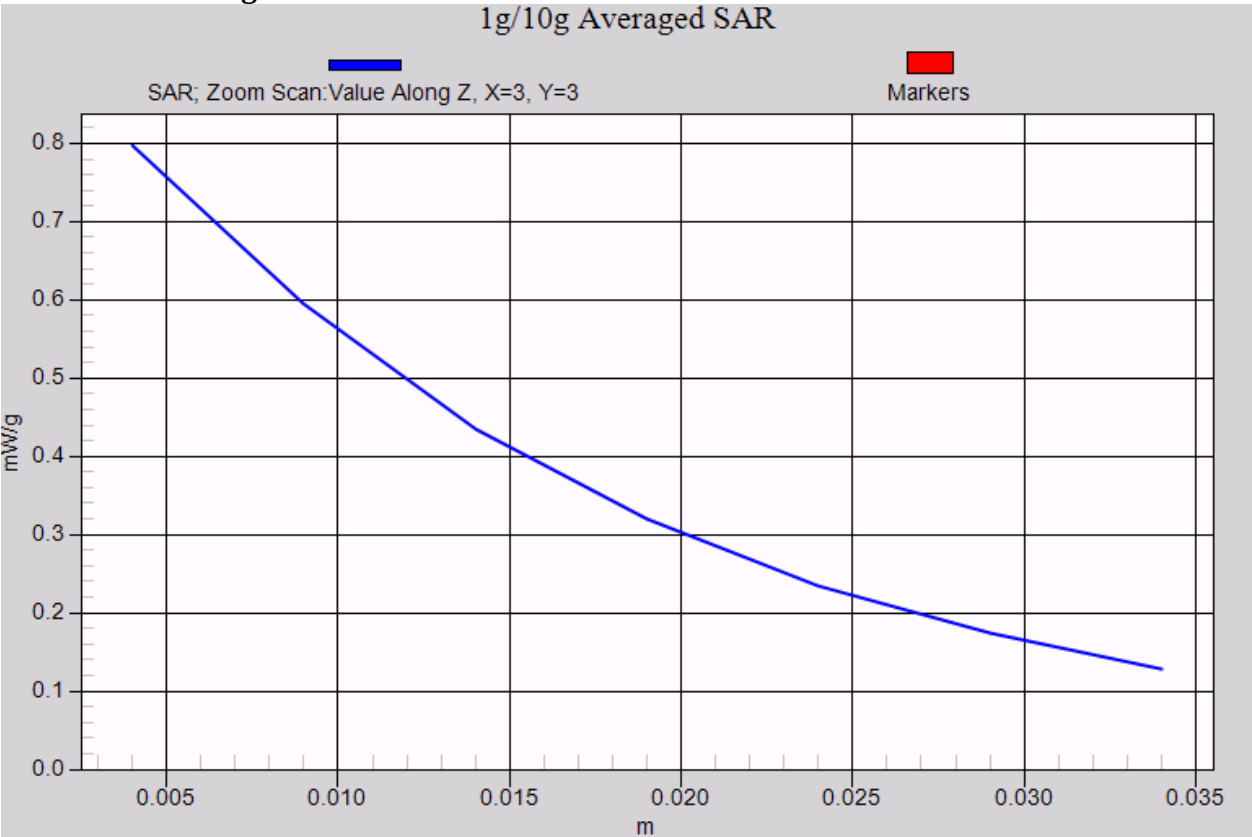




U3100-5 towards ground- GSM850 GPRS 2TS Channel 251

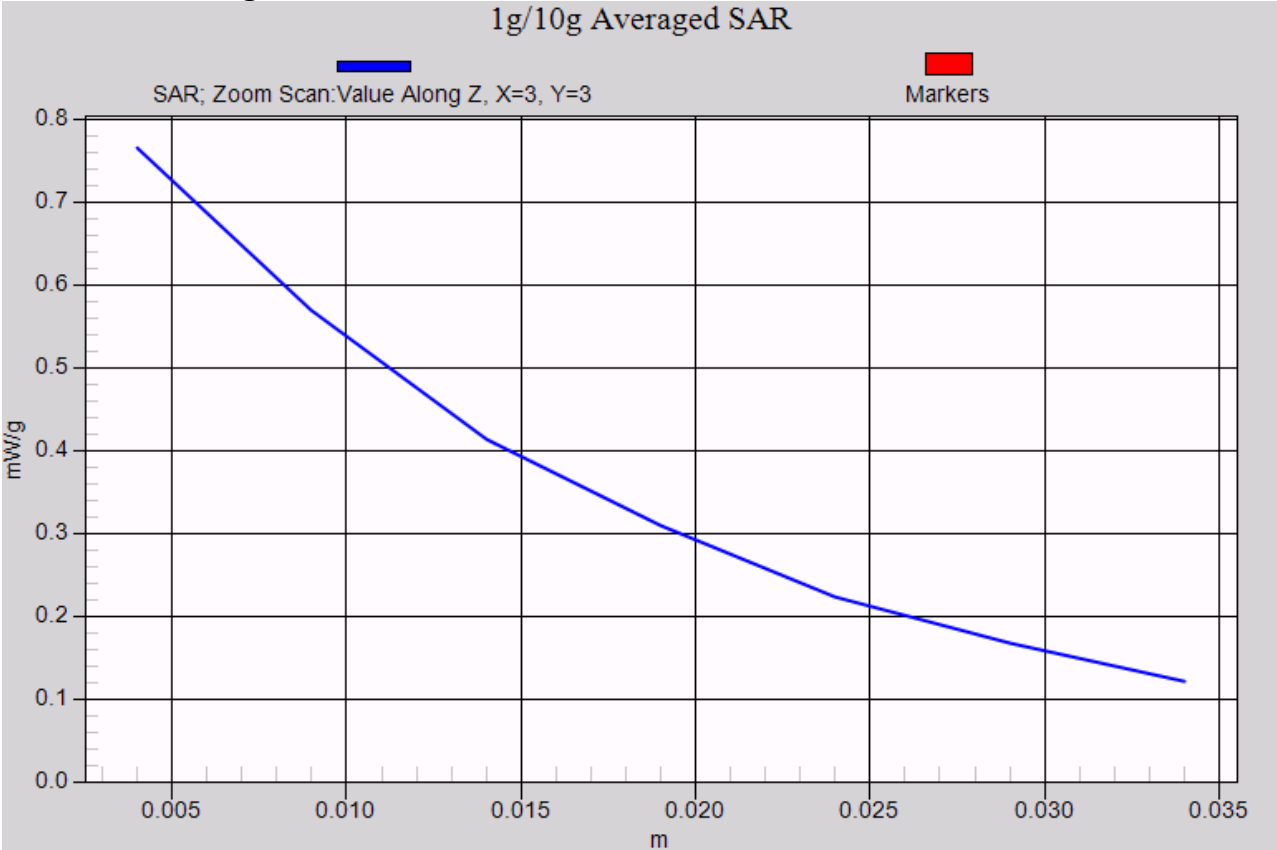


U3100-5 towards ground- GSM850 GPRS 2TS Channel 128

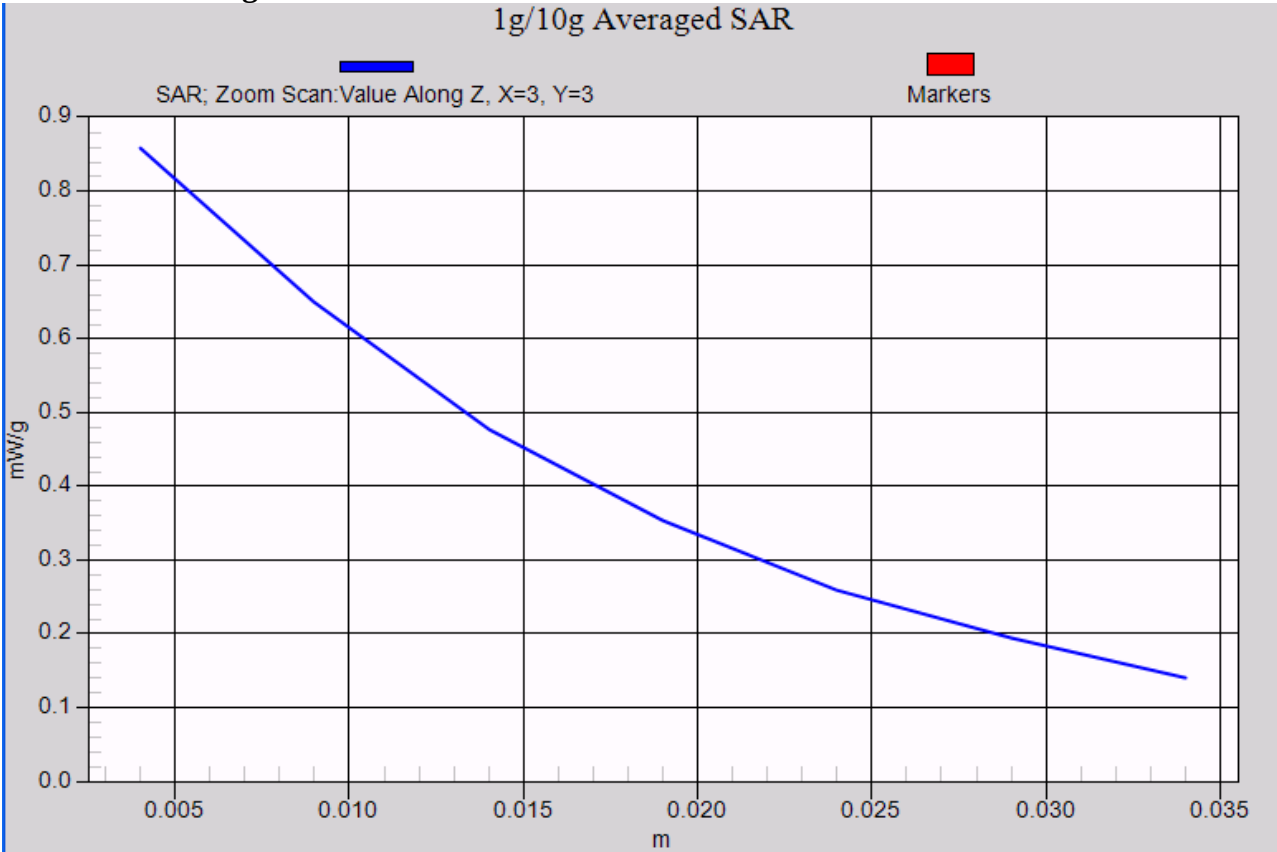




U3100-5 towards ground with Headset- GSM850 Channel 128

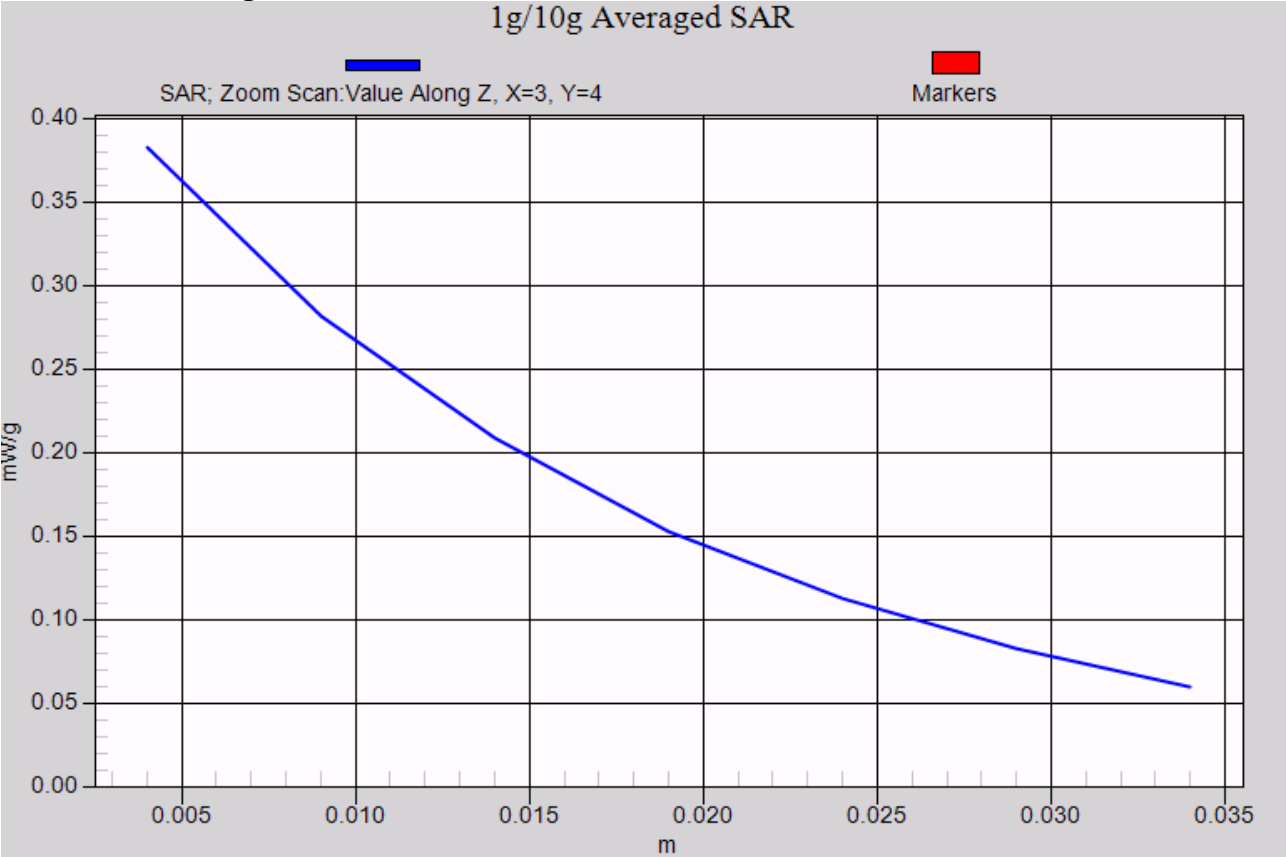


U3100-5 towards ground with Bluetooth Headset- GSM850 Channel 128

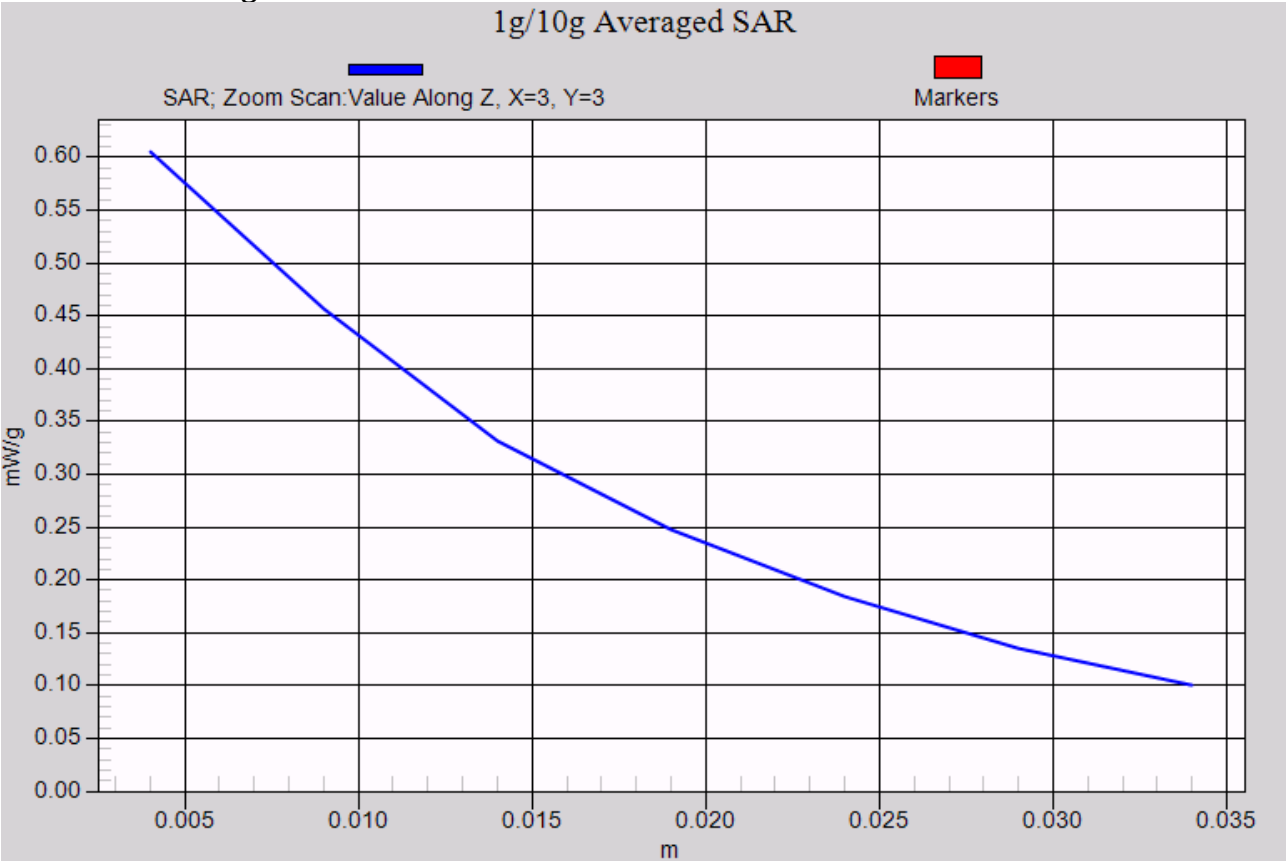




WCDAM FDD V head:

U3100-5 LeftHandSide touched- WCDAM FDD V Channel 4183

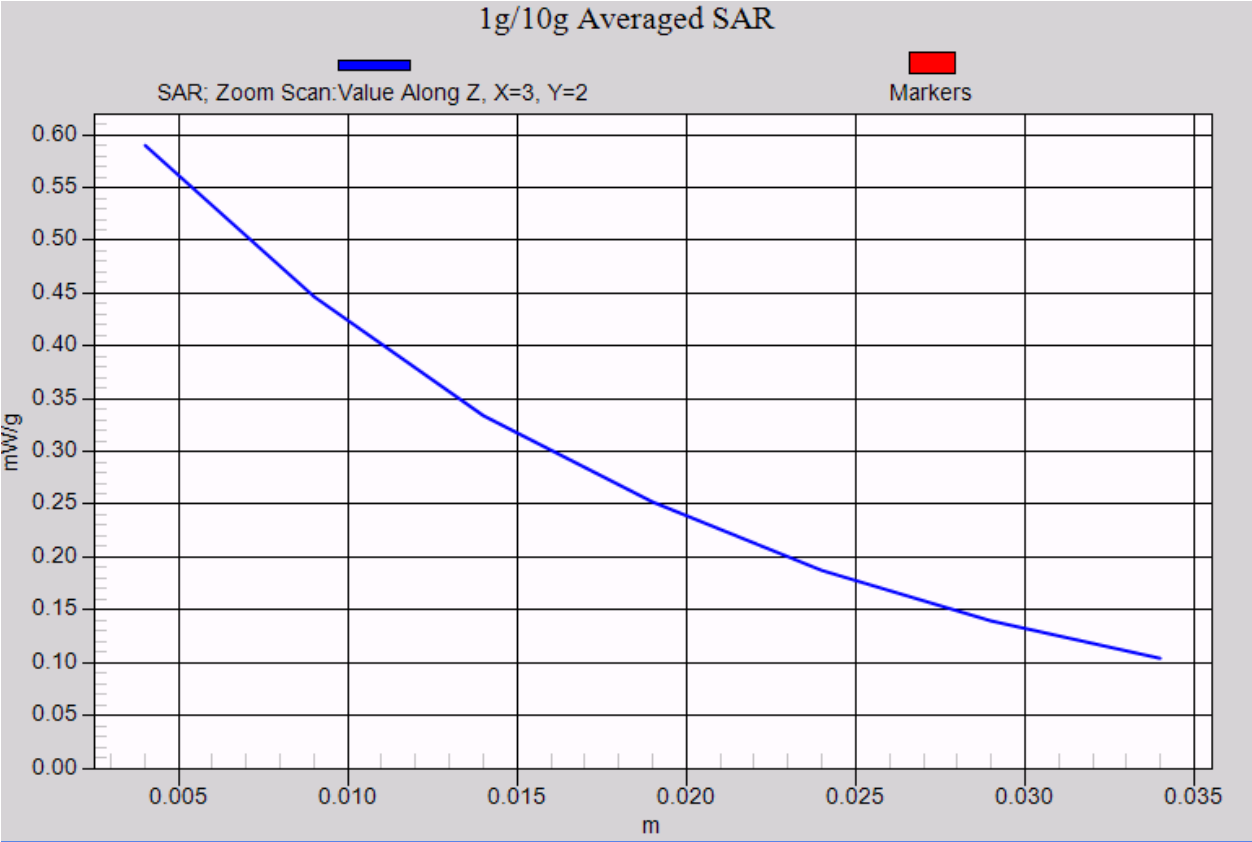


U3100-5 LeftHandSide tilted 15°-WCDAM FDD V Channel 4183

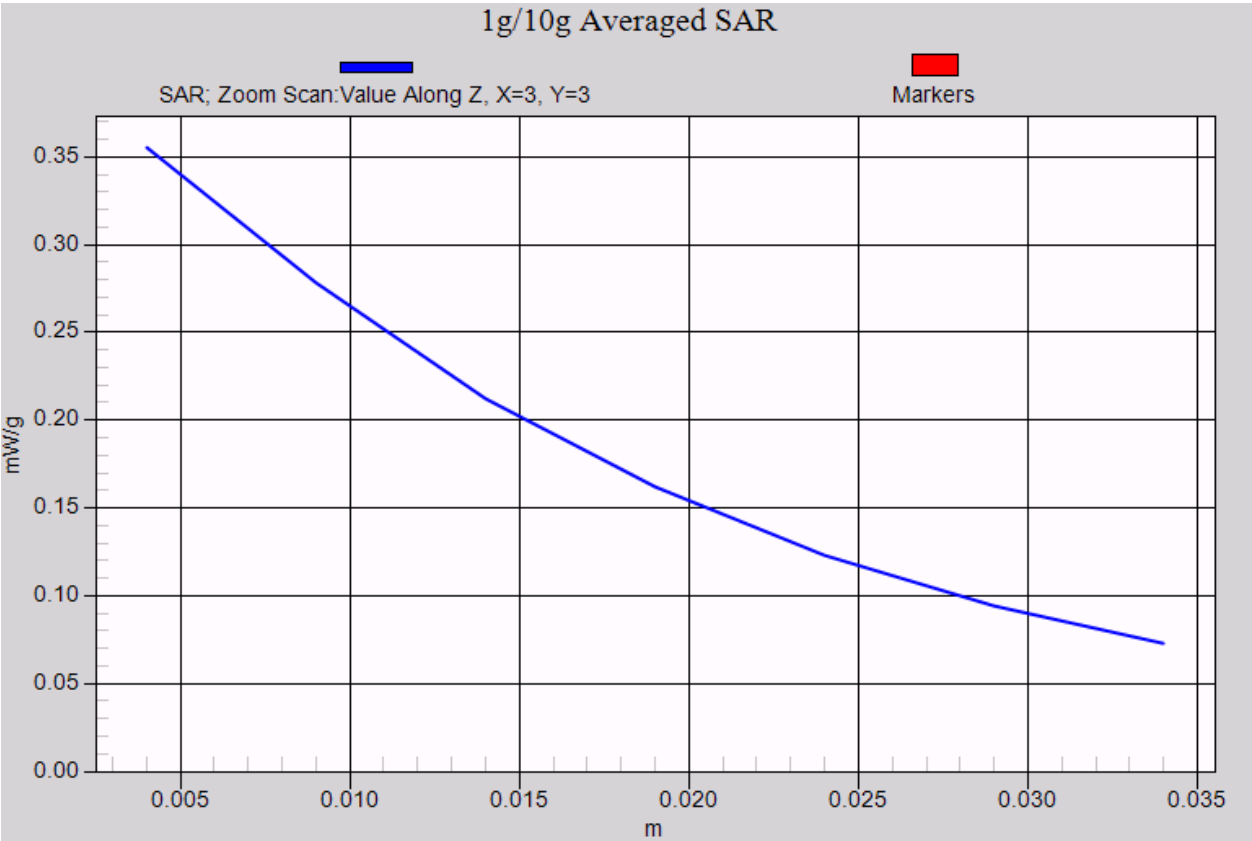




U3100-5 RightHandSide touched- WCDAM FDD V Channel 4183

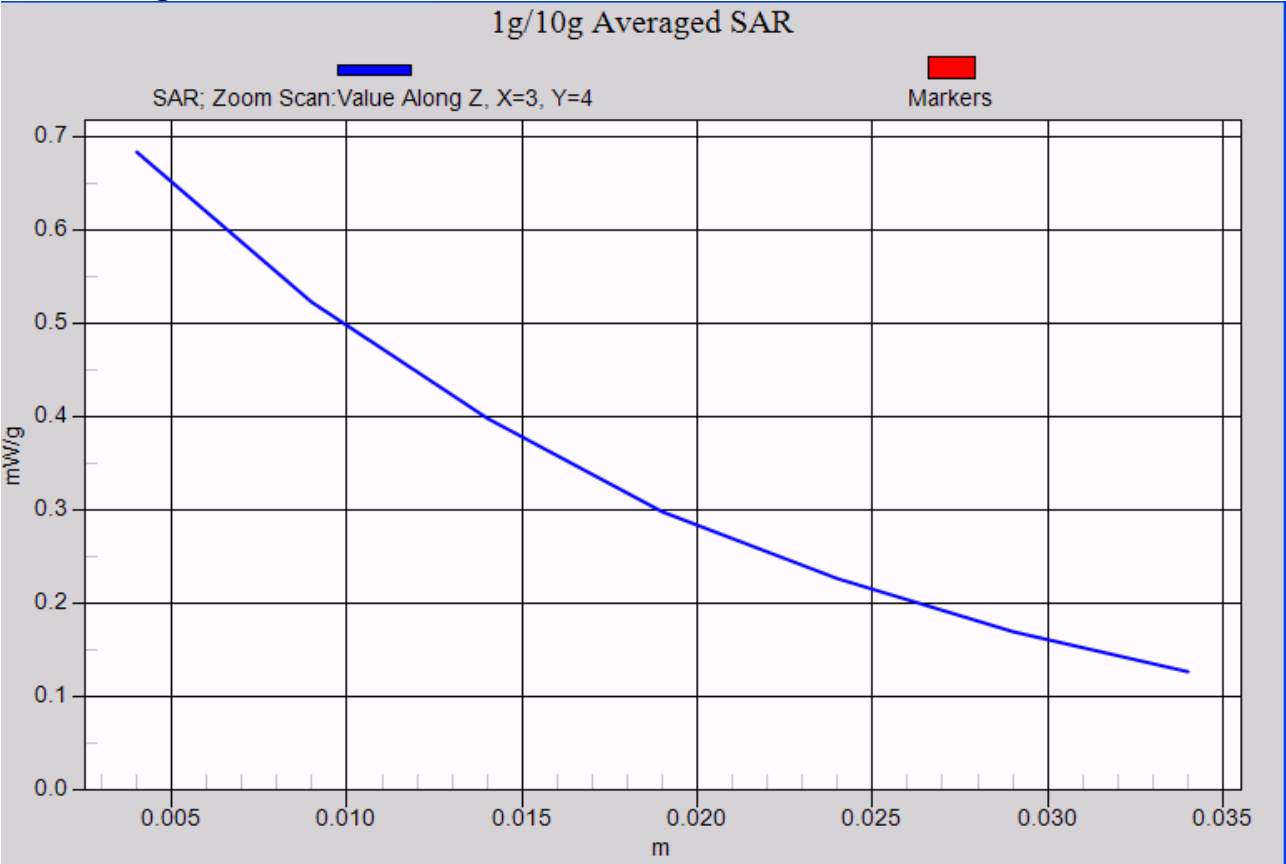


U3100-5 RightHandSide tilted 15°-WCDAM FDD V Channel 4183

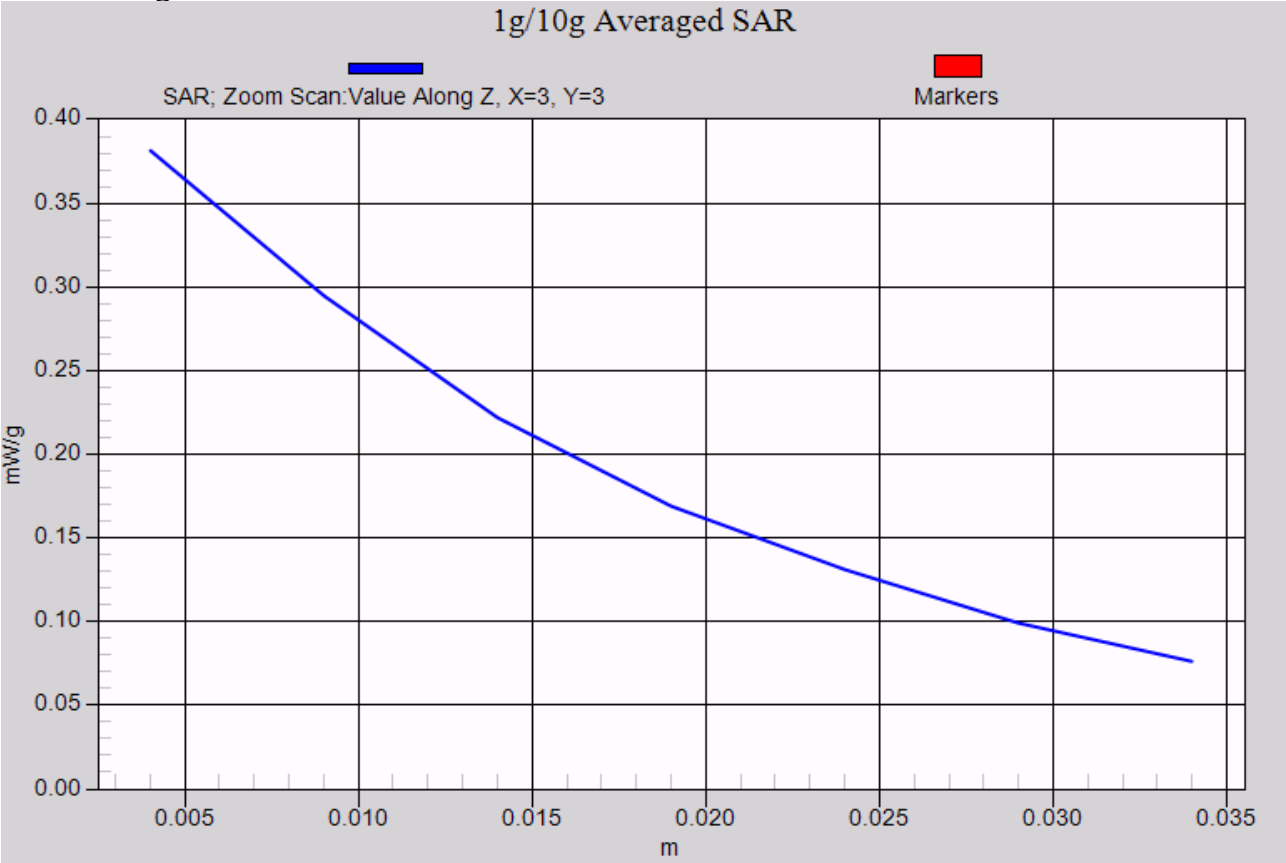




U3100-5 RightHandSide touched- WCDAM FDD V Channel 4233

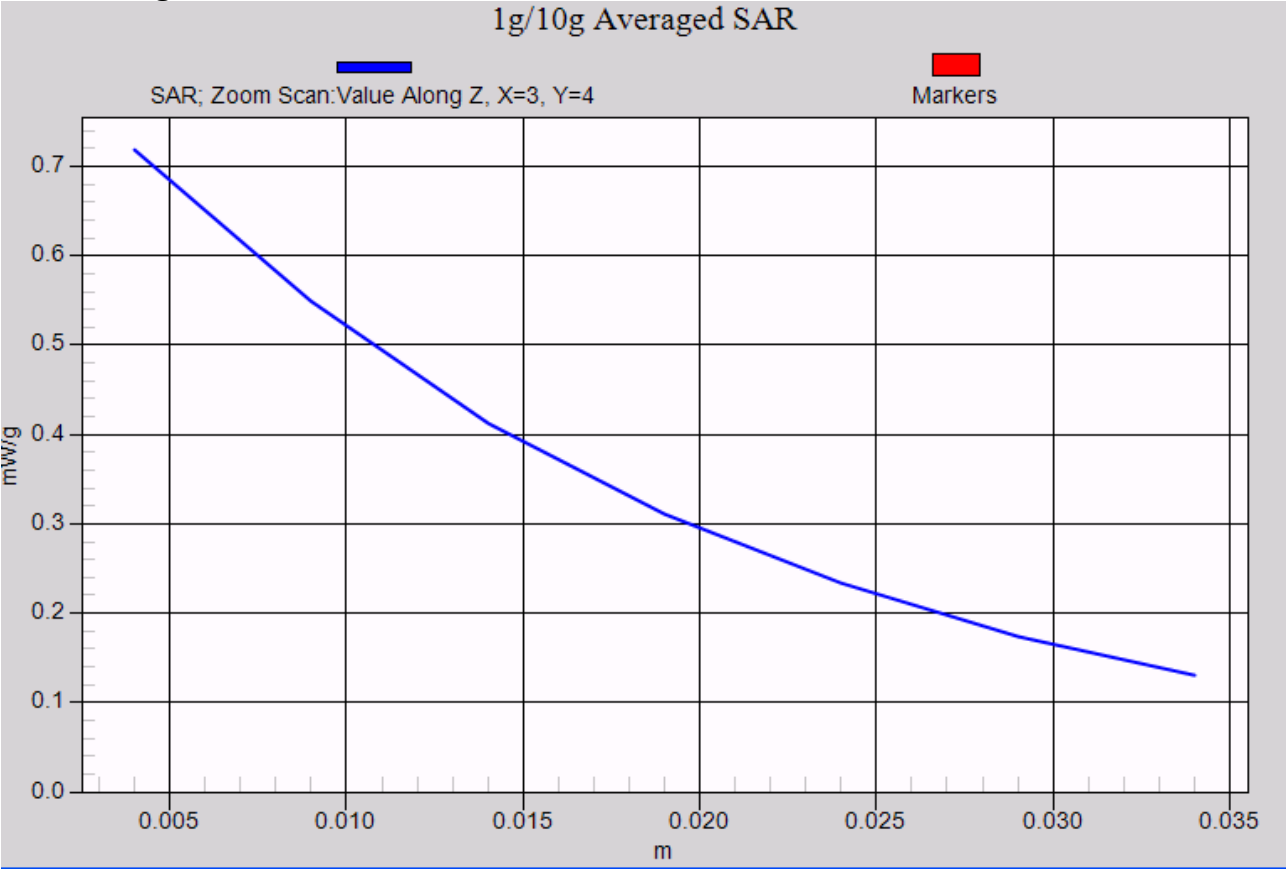


U3100-5 RightHandSide touched- WCDAM FDD V Channel I 4132

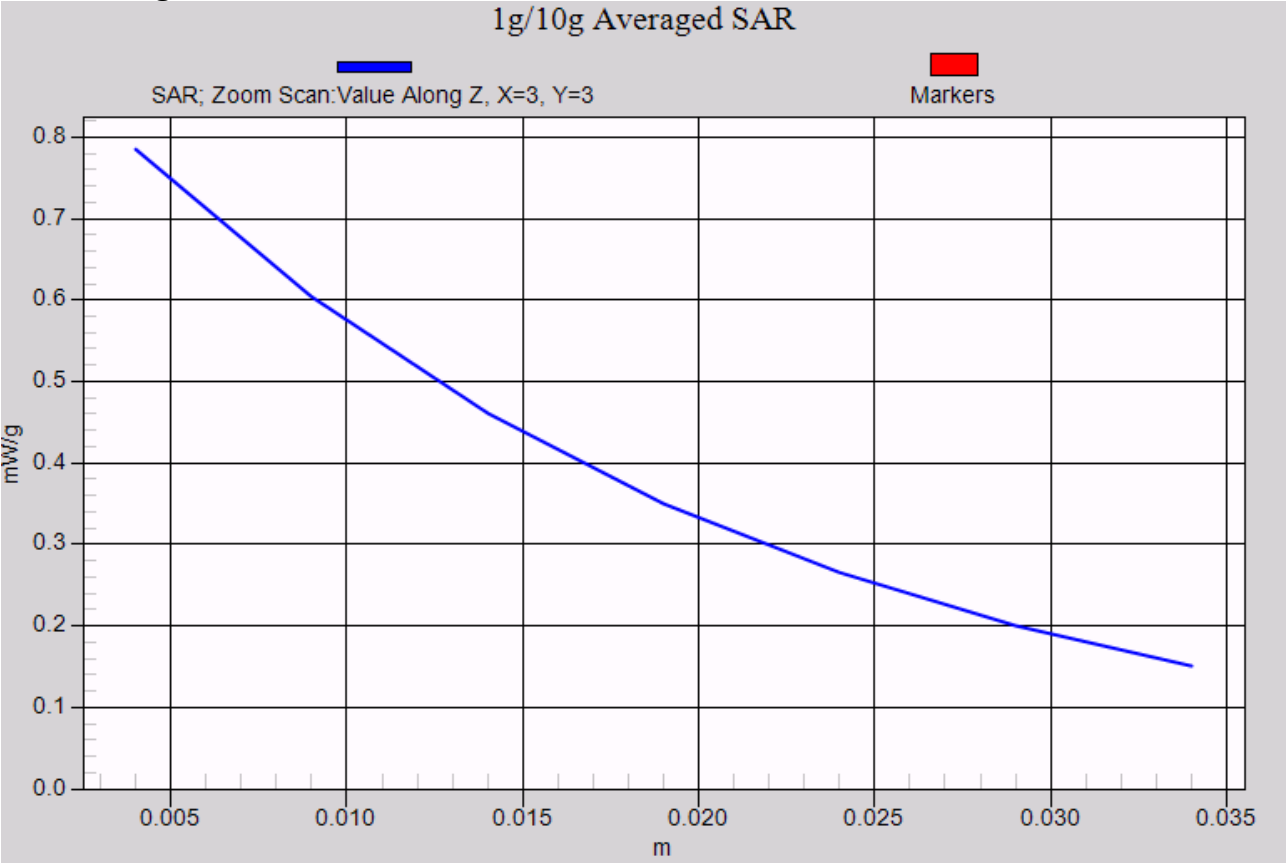




WCDAM FDD V body:

U3100-5 towards phantom- WCDAM FDD V Channel 4183

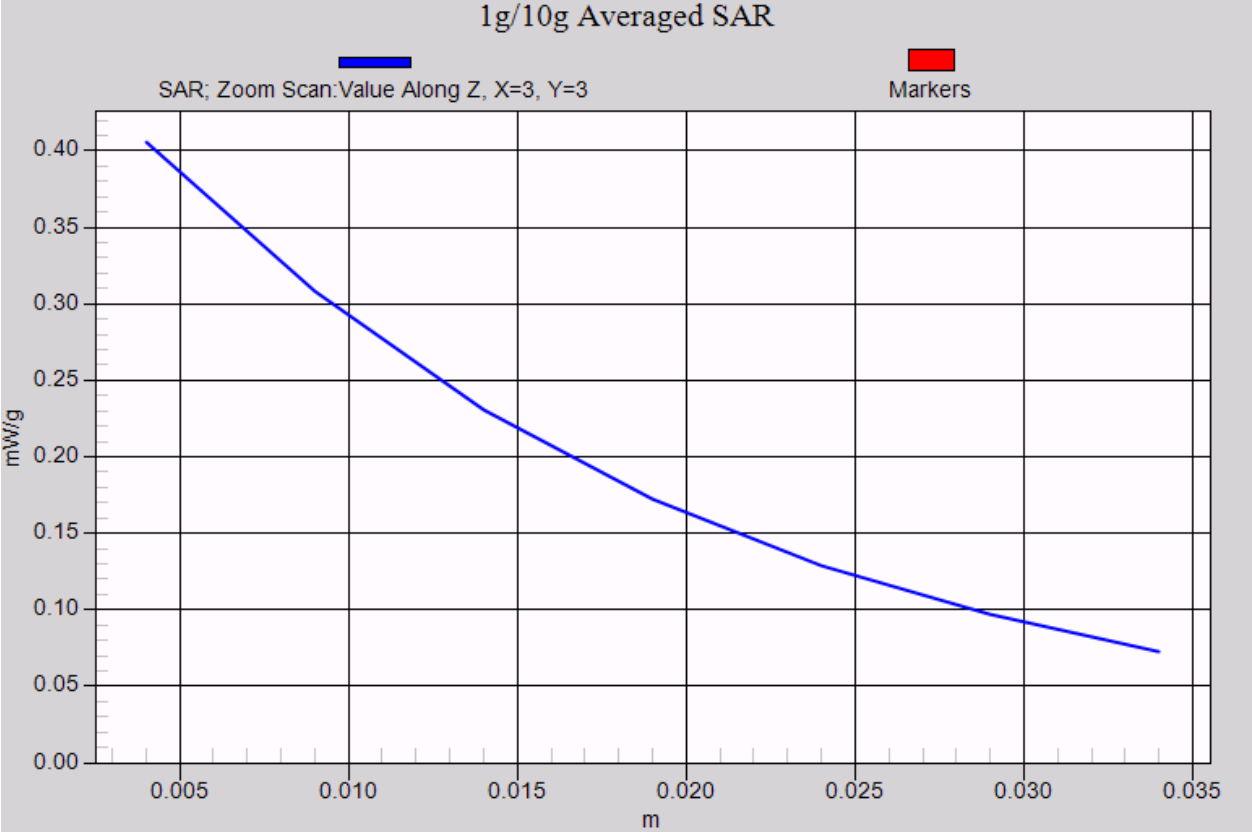


U3100-5 towards ground- WCDAM FDD V Channel 4183

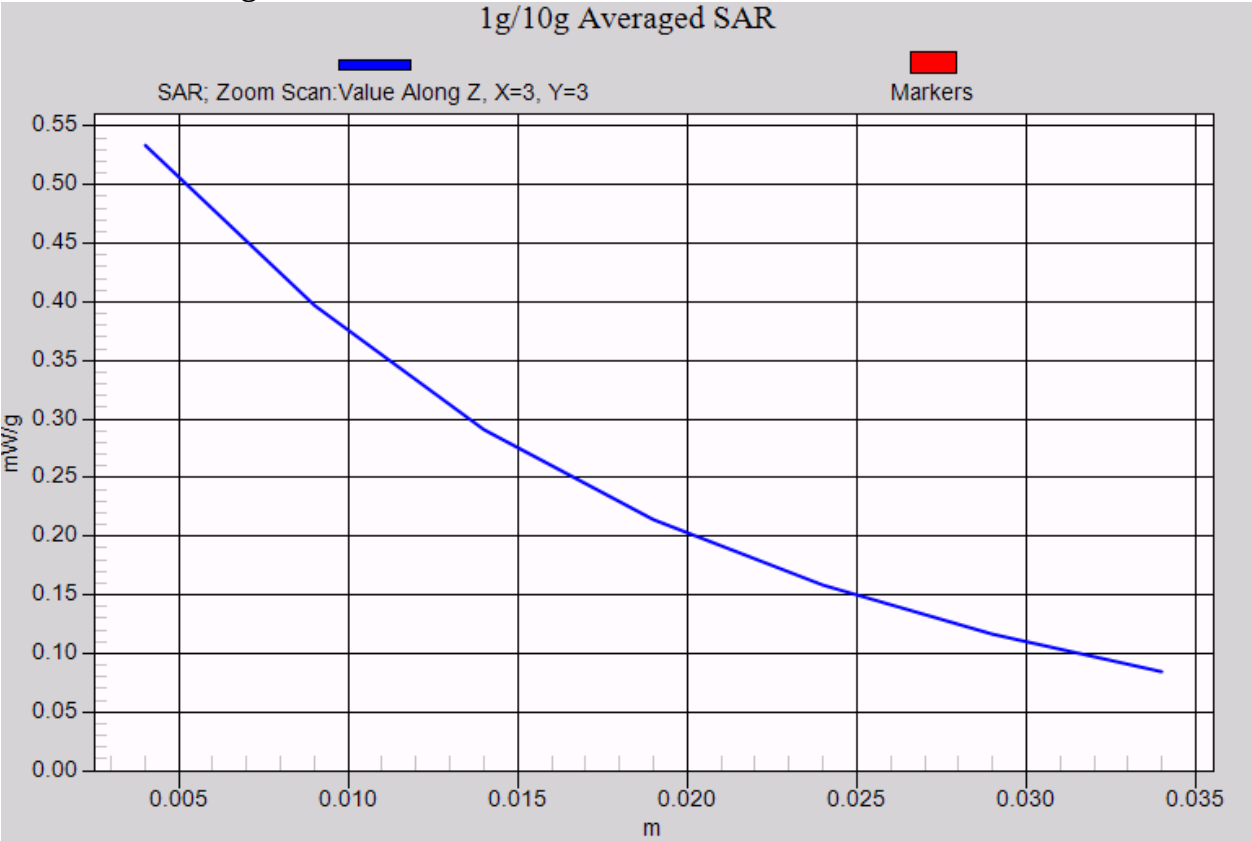




U3100-5 towards ground- WCDAM FDD V Channel 4233

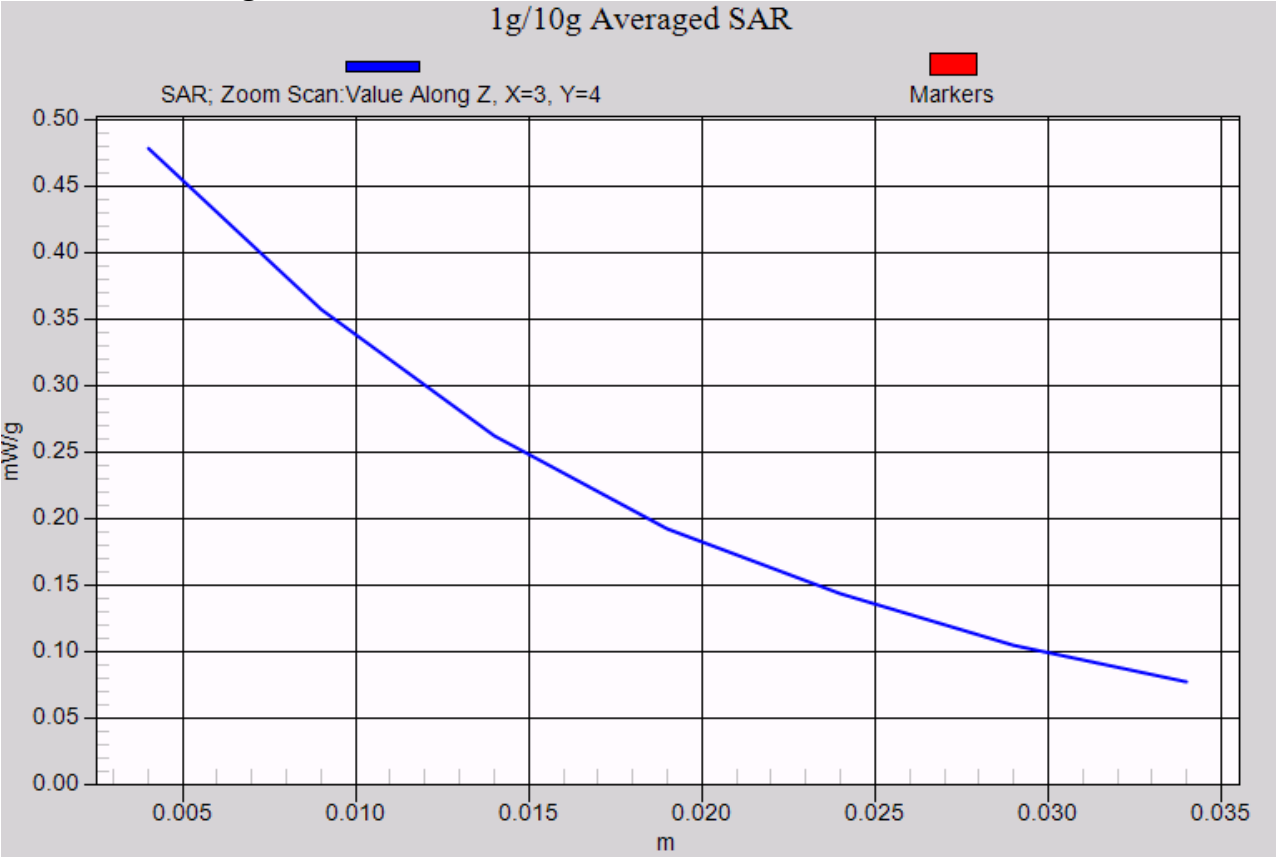


U3100-5 towards ground- WCDAM FDD V Channel 4132

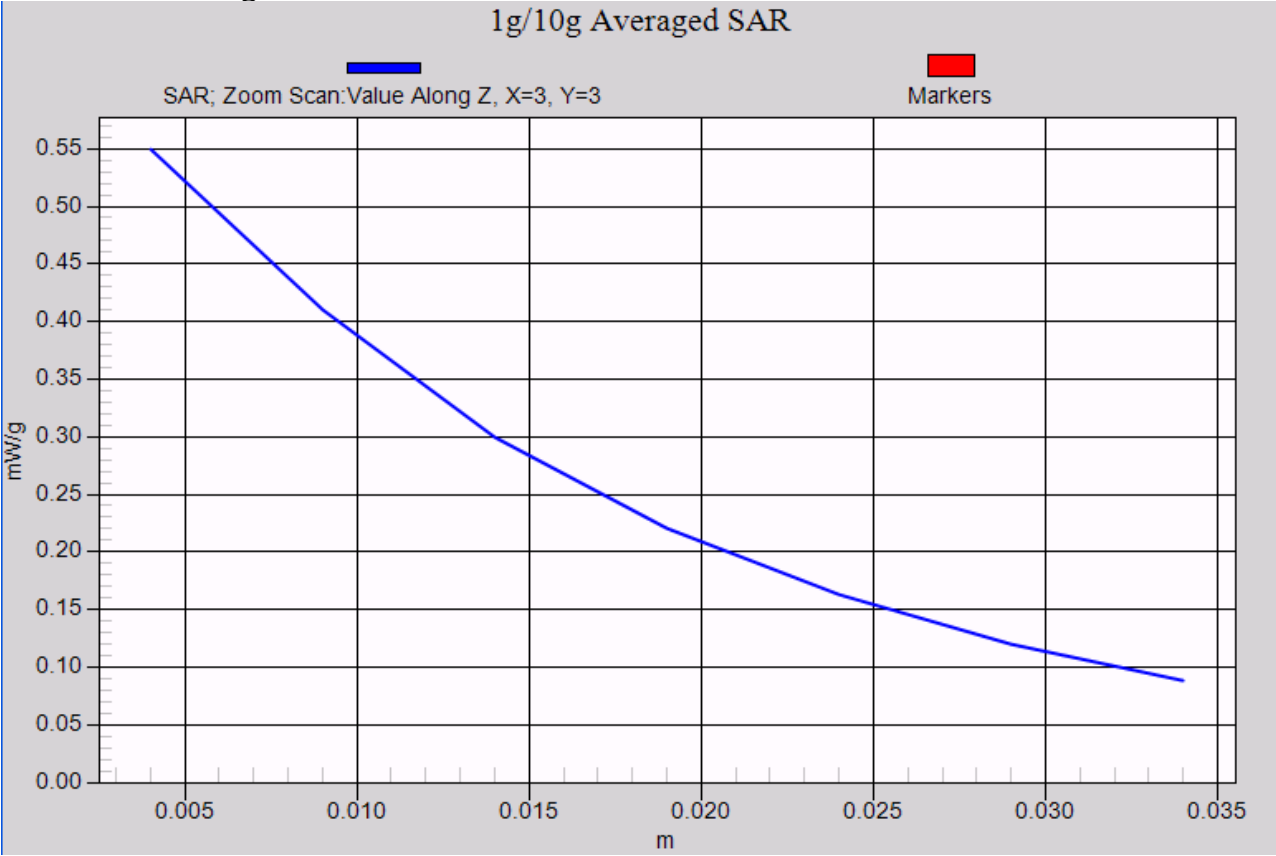




U3100-5 towards ground with Headset- WCDAM FDD V Channel 4132

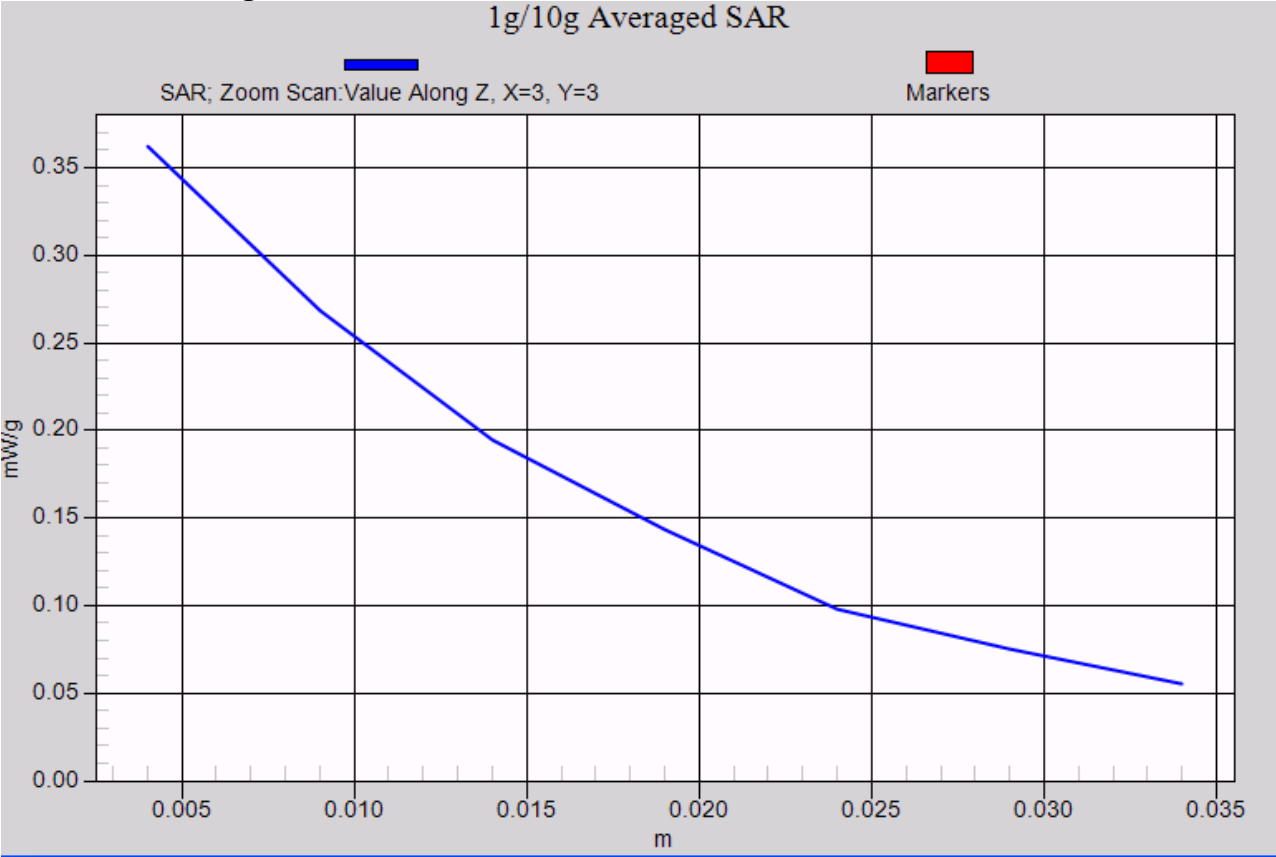


U3100-5 towards ground with Bluetooth Headset- WCDAM FDD V Channel 4132

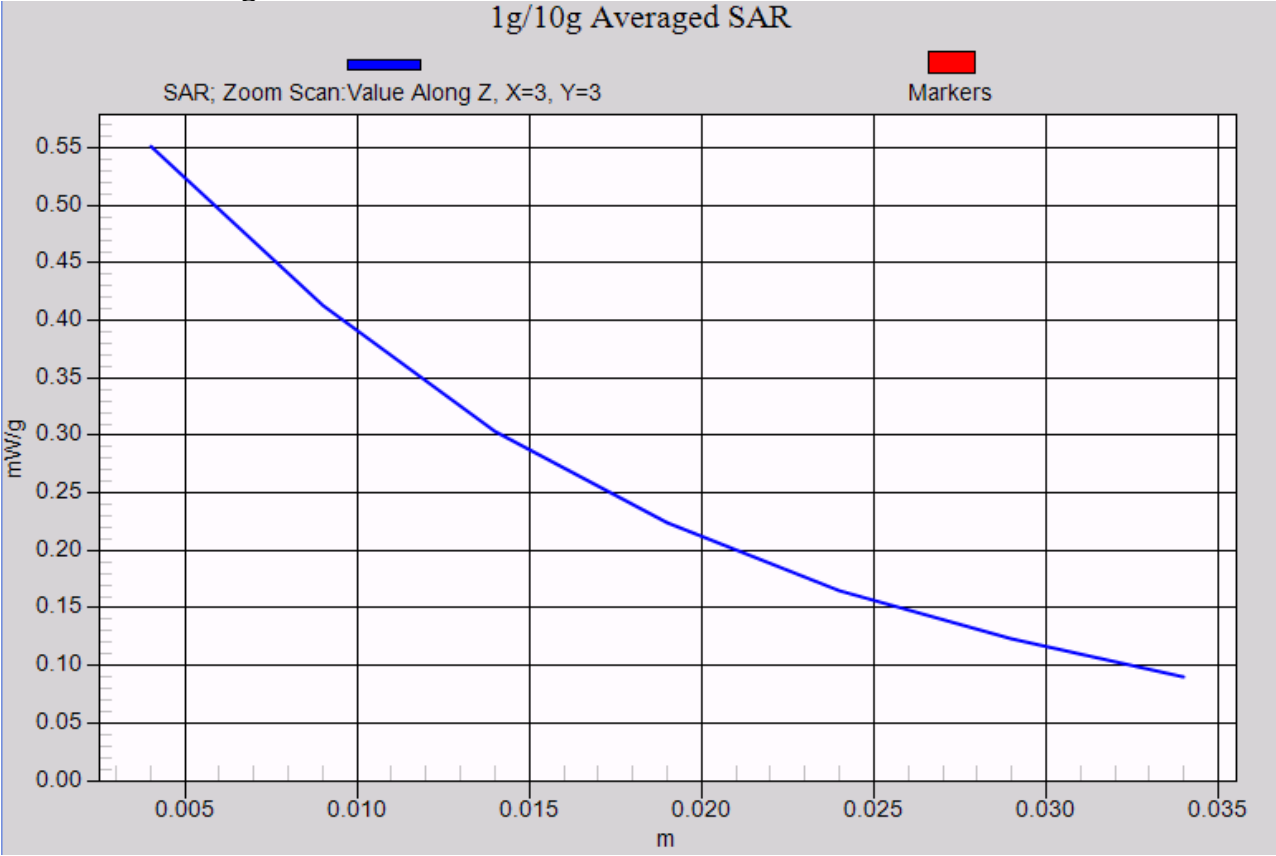




GSM1900 head:

U3100-5 LeftHandSide touched- GSM1900 Channel 661

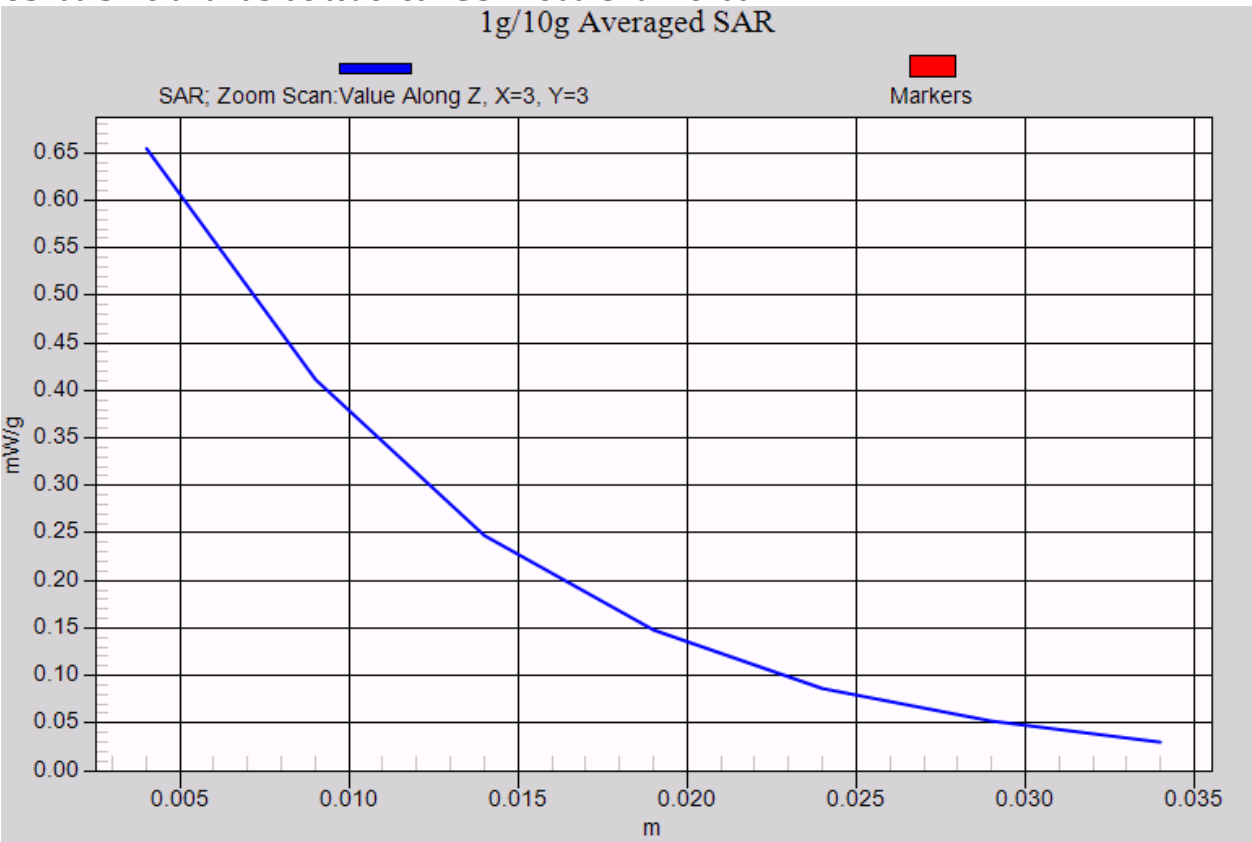


U3100-5 LeftHandSide titled 15°- GSM1900 Channel 661

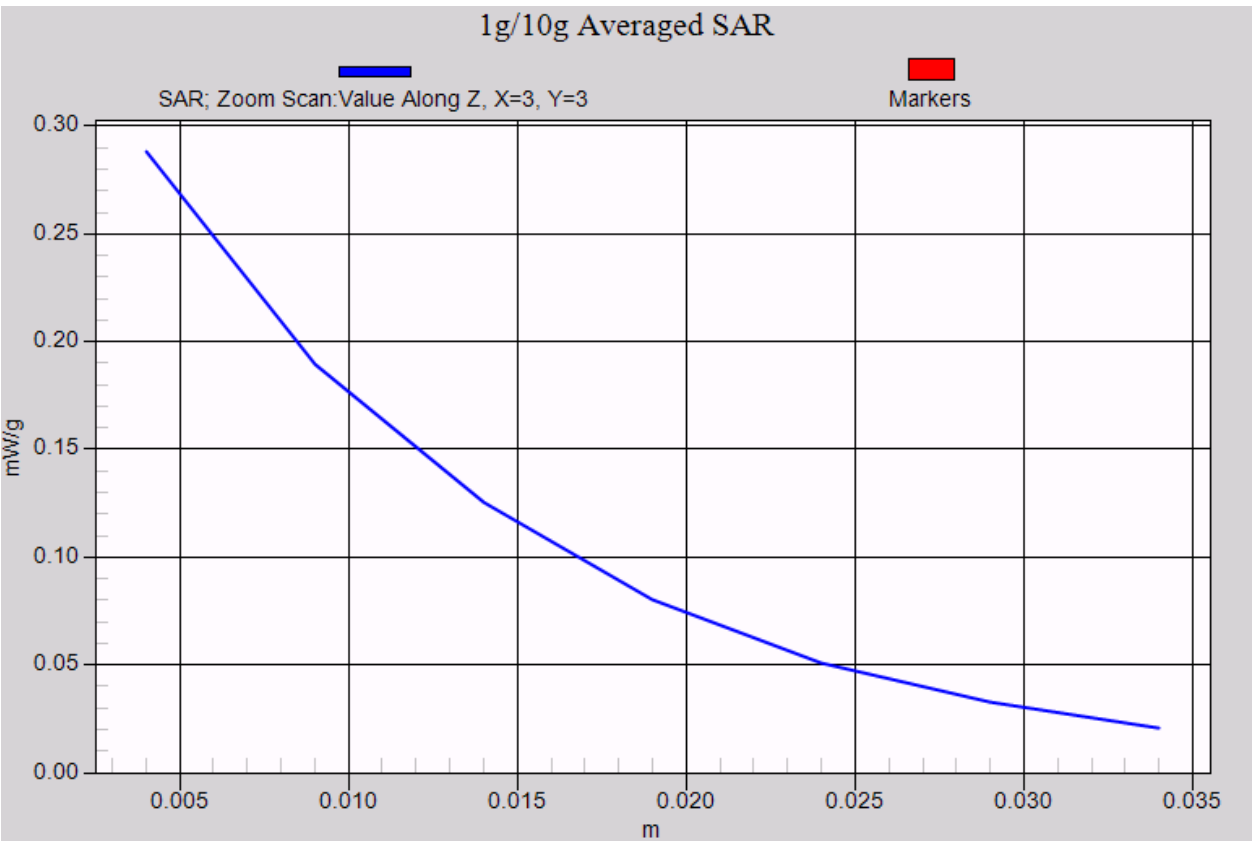




U3100-5 RightHandSide touched- GSM1900 Channel 661

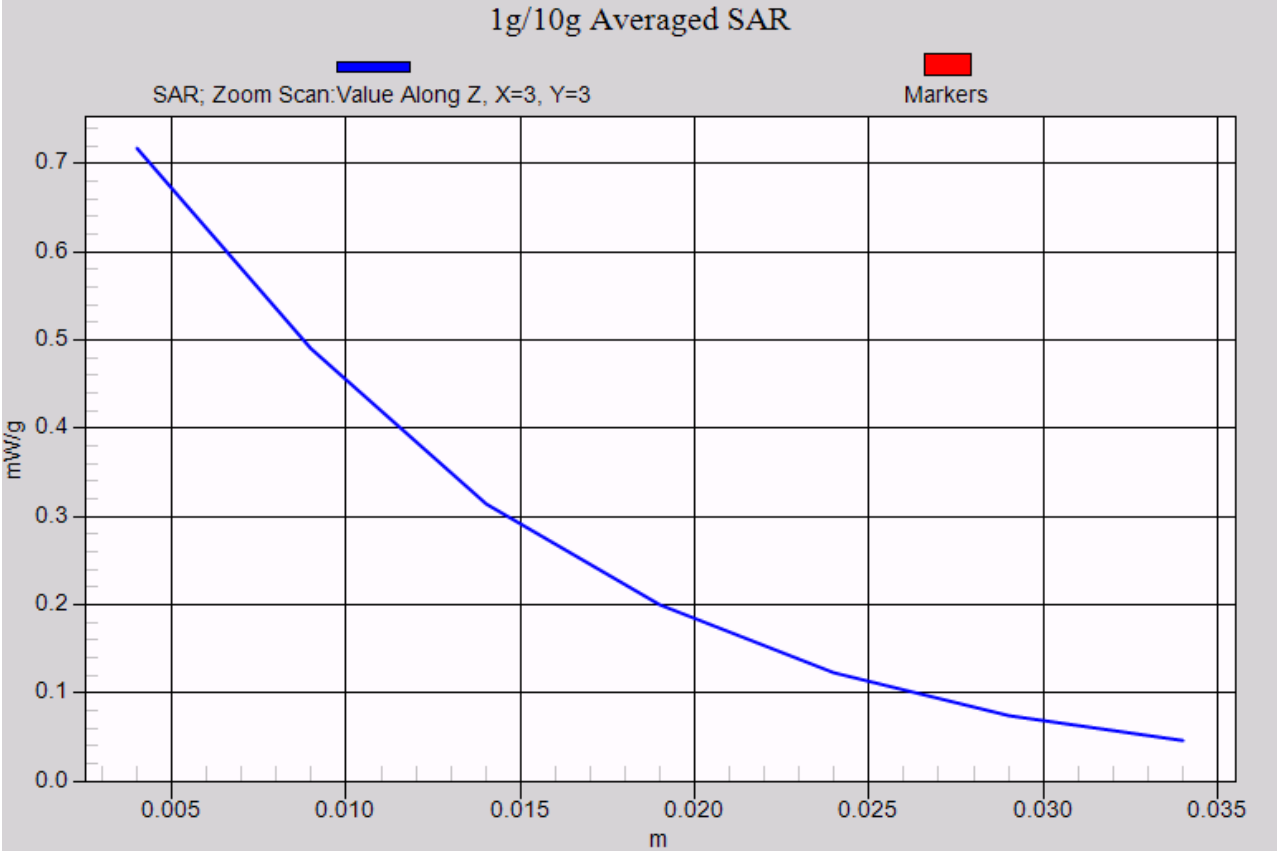


U3100-5 RightHandSide titled 15°- GSM1900 Channel 661

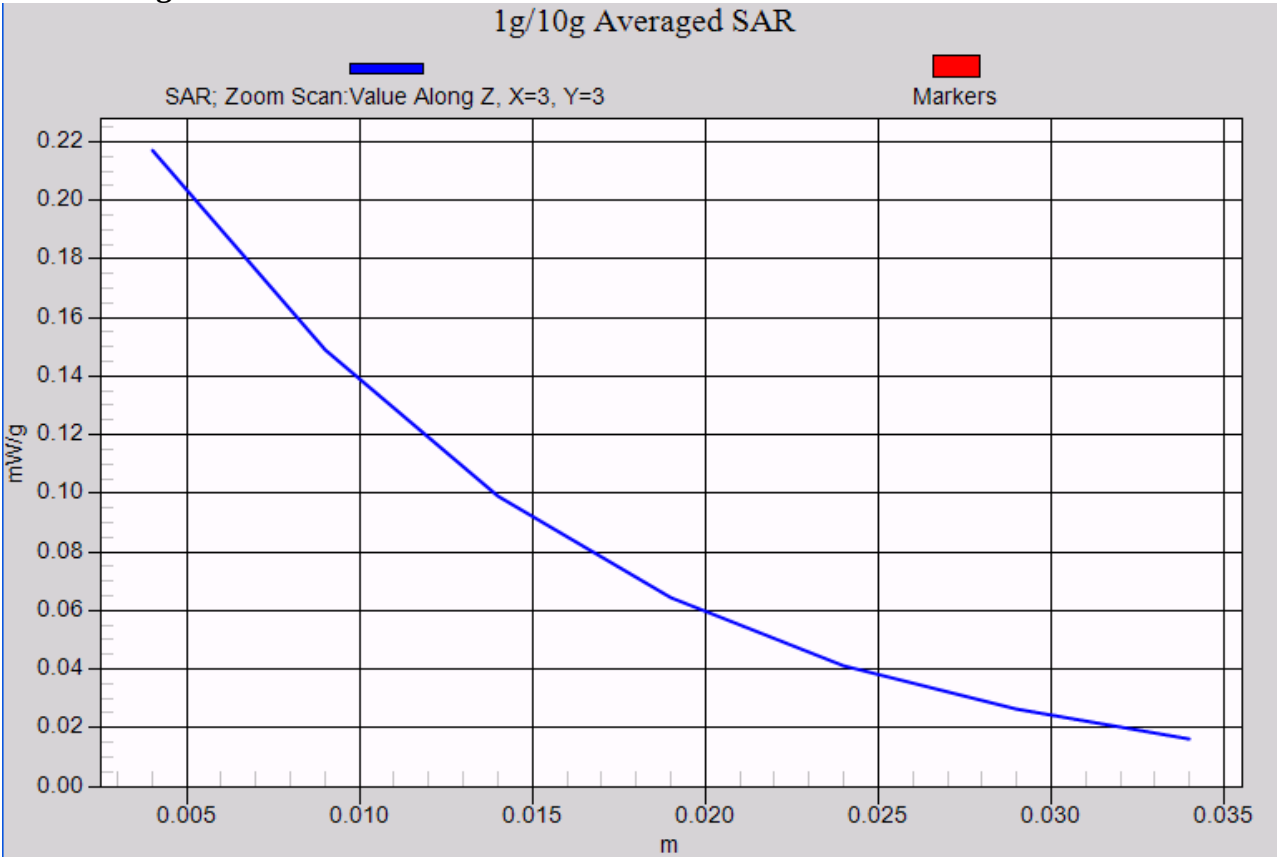




U3100-5 LeftHandSide touched- GSM1900 Channel 810

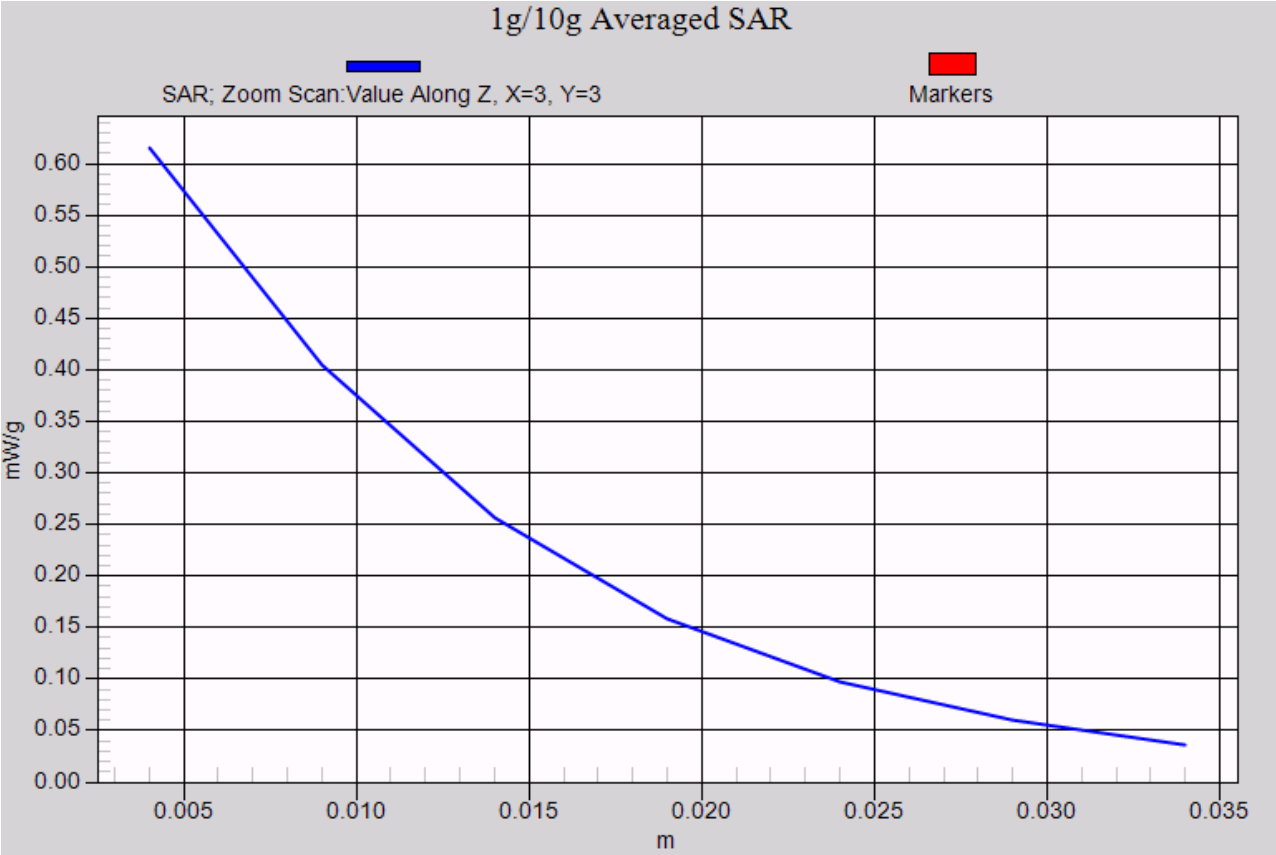


U3100-5 LeftHandSide titled 15°- GSM1900 Channel 512

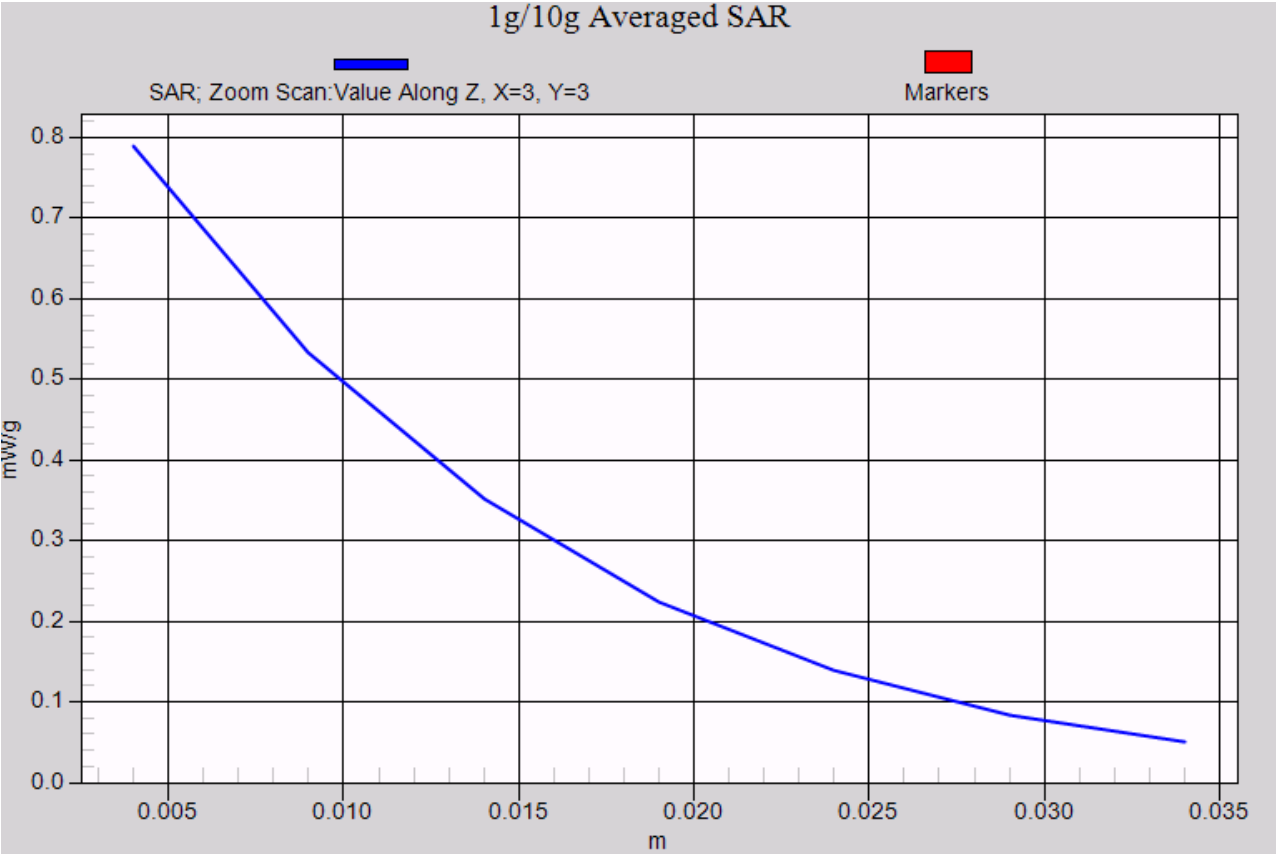




GSM1900 body:

U3100-5 towards phantom- GSM1900 GPRS 2TS Channel 661

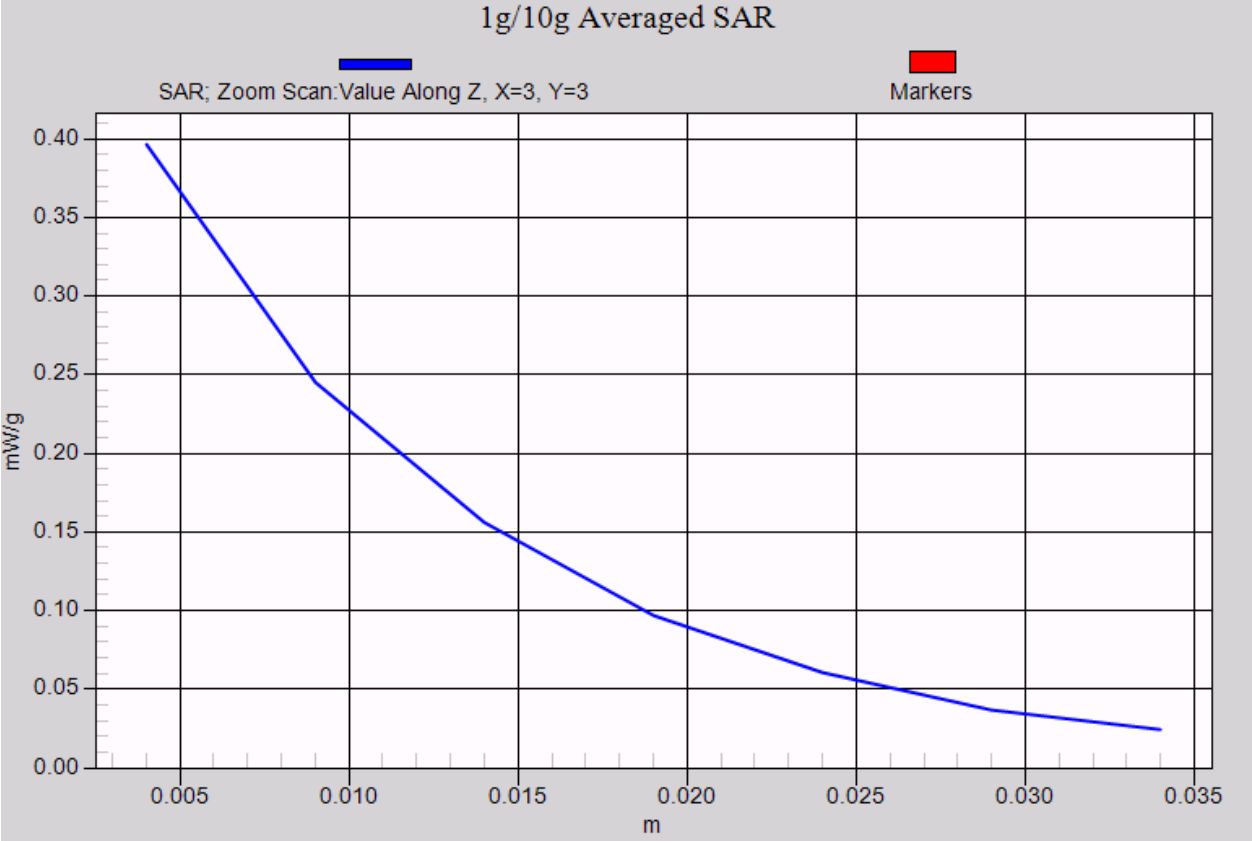


U3100-5 towards ground- GSM1900 GPRS 2TS Channel 661

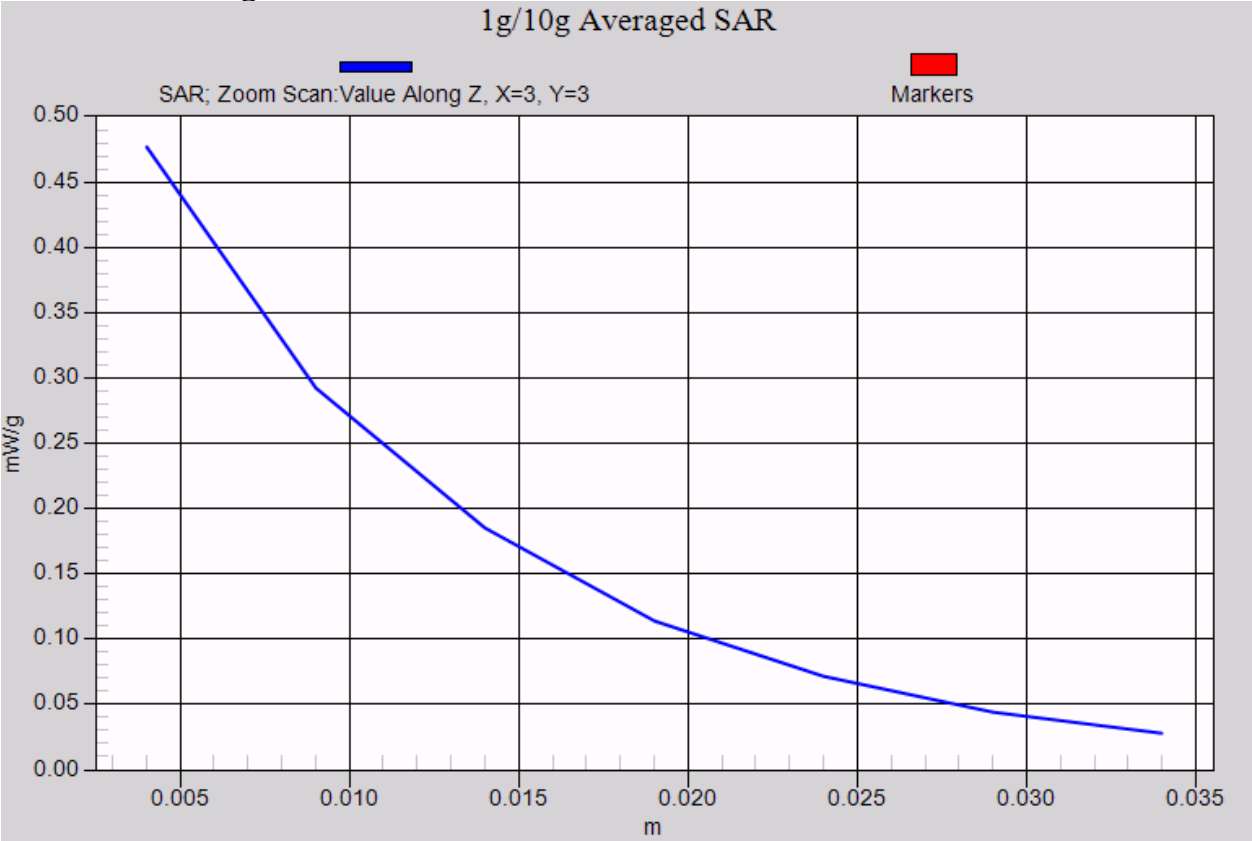




U3100-5 towards ground- GSM1900 GPRS 2TS Channel 810

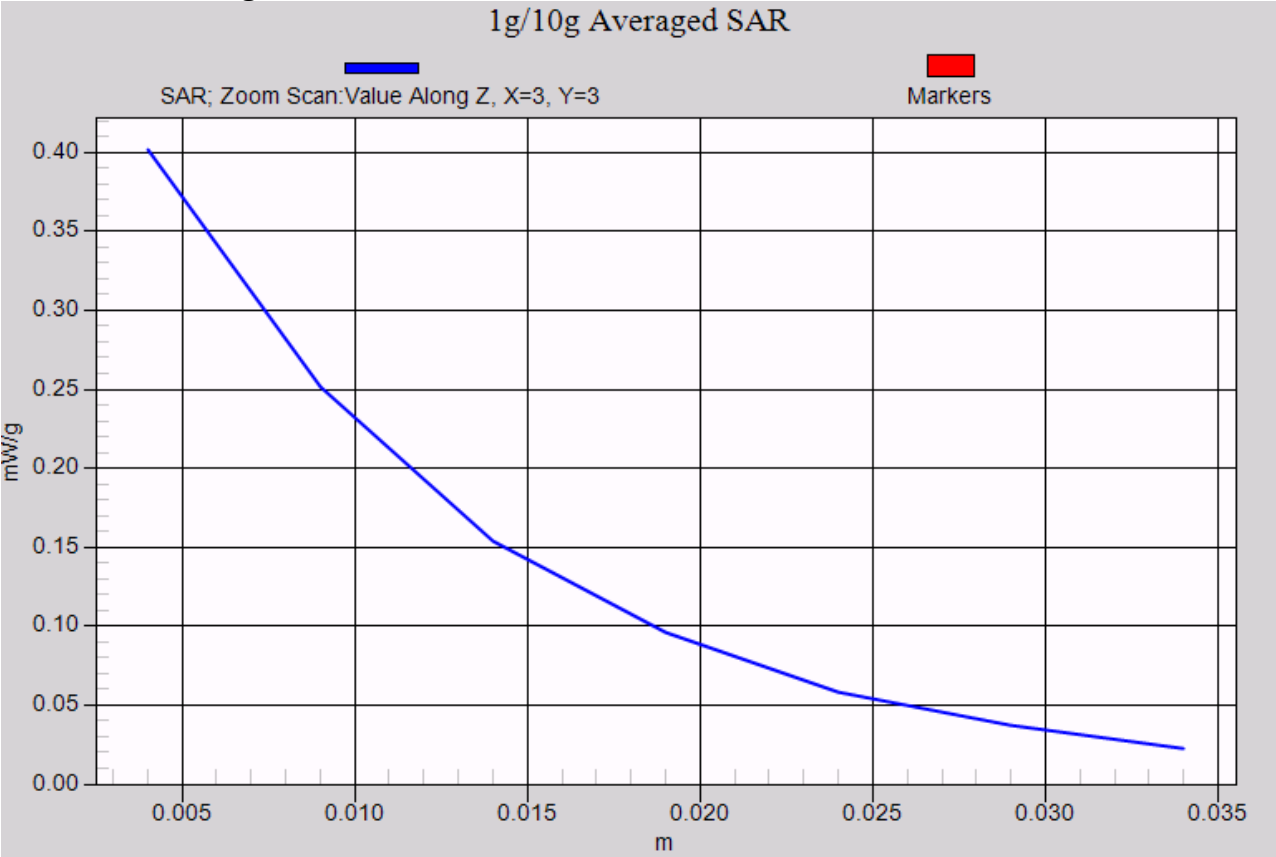


U3100-5 towards ground- GSM1900 GPRS 2TS Channel 512

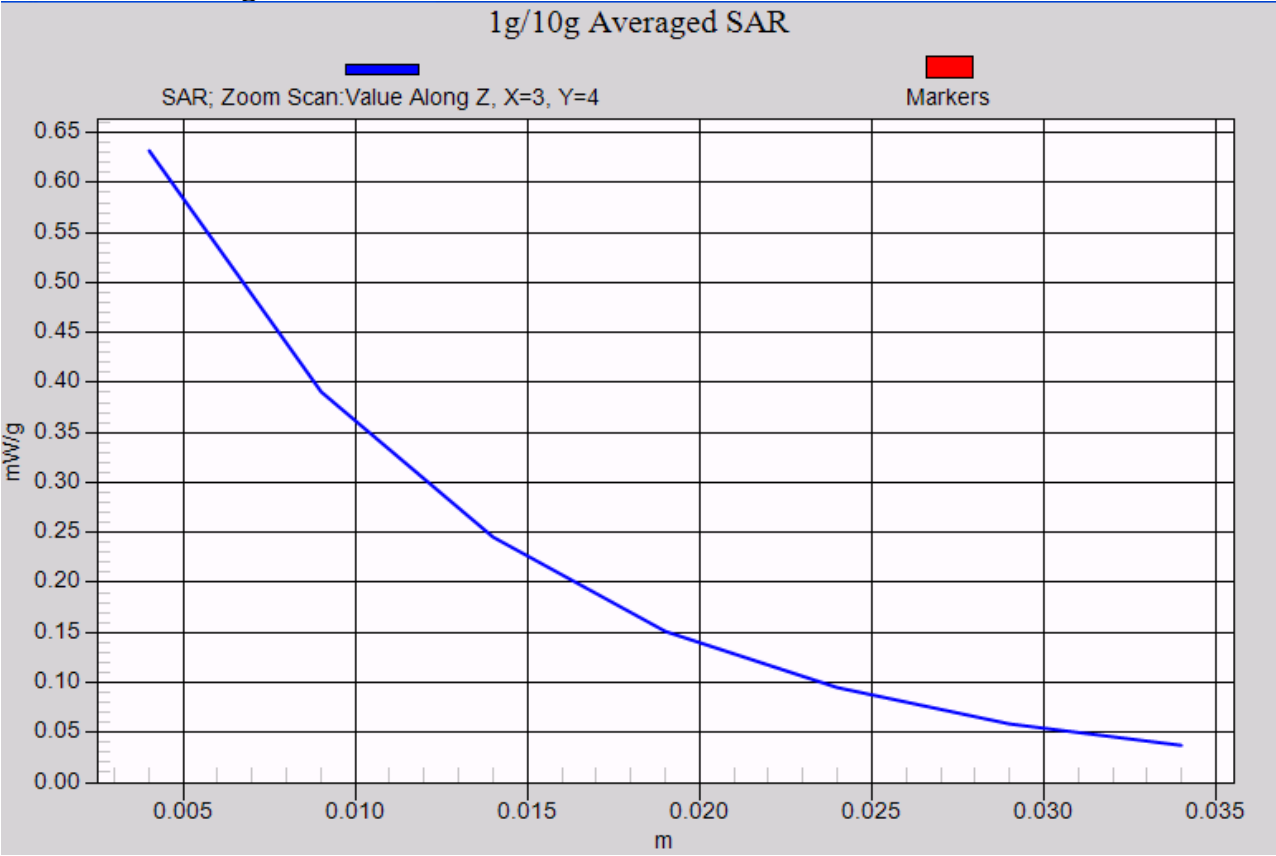




U3100-5 towards ground with Headset- GSM1900 Channel 512

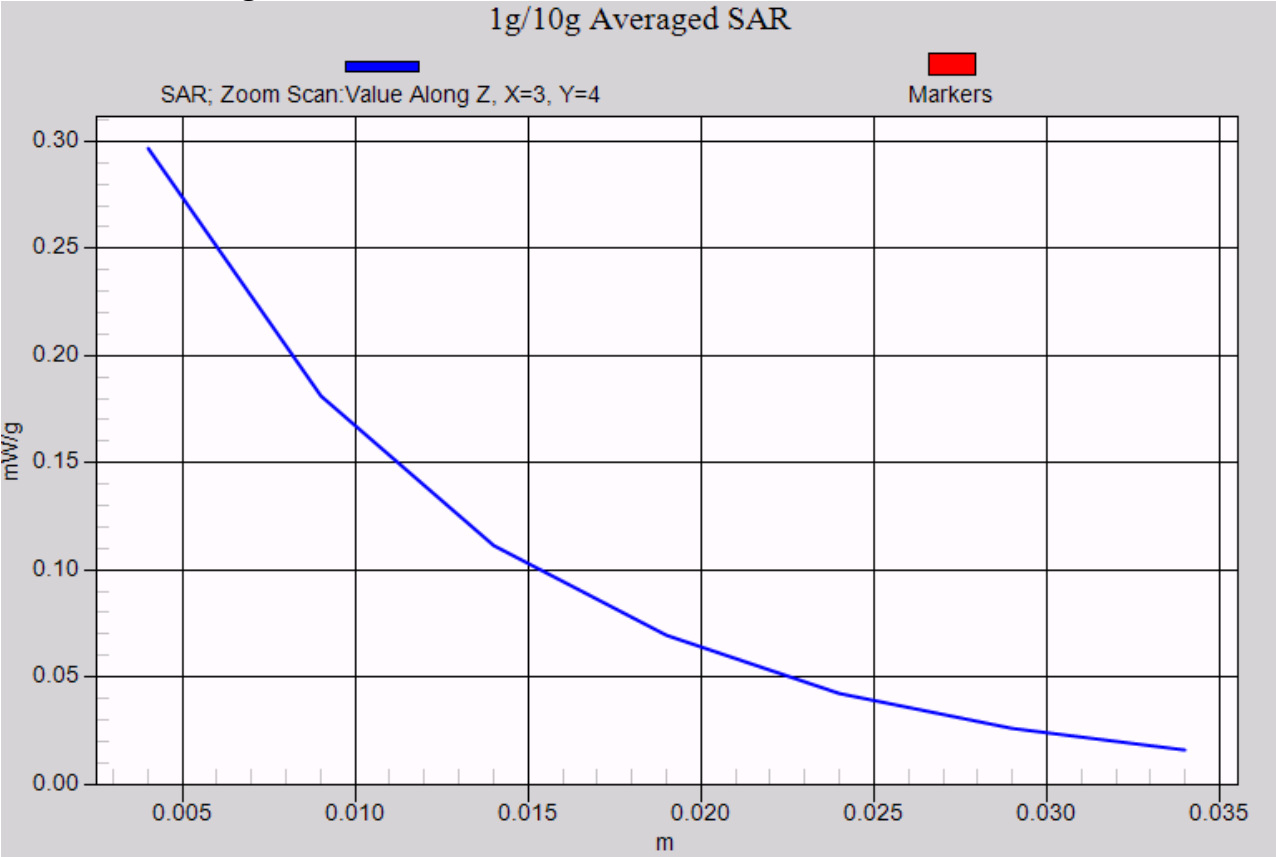


U3100-5 towards ground with Bluetooth Headset- GSM1900 Channel 512

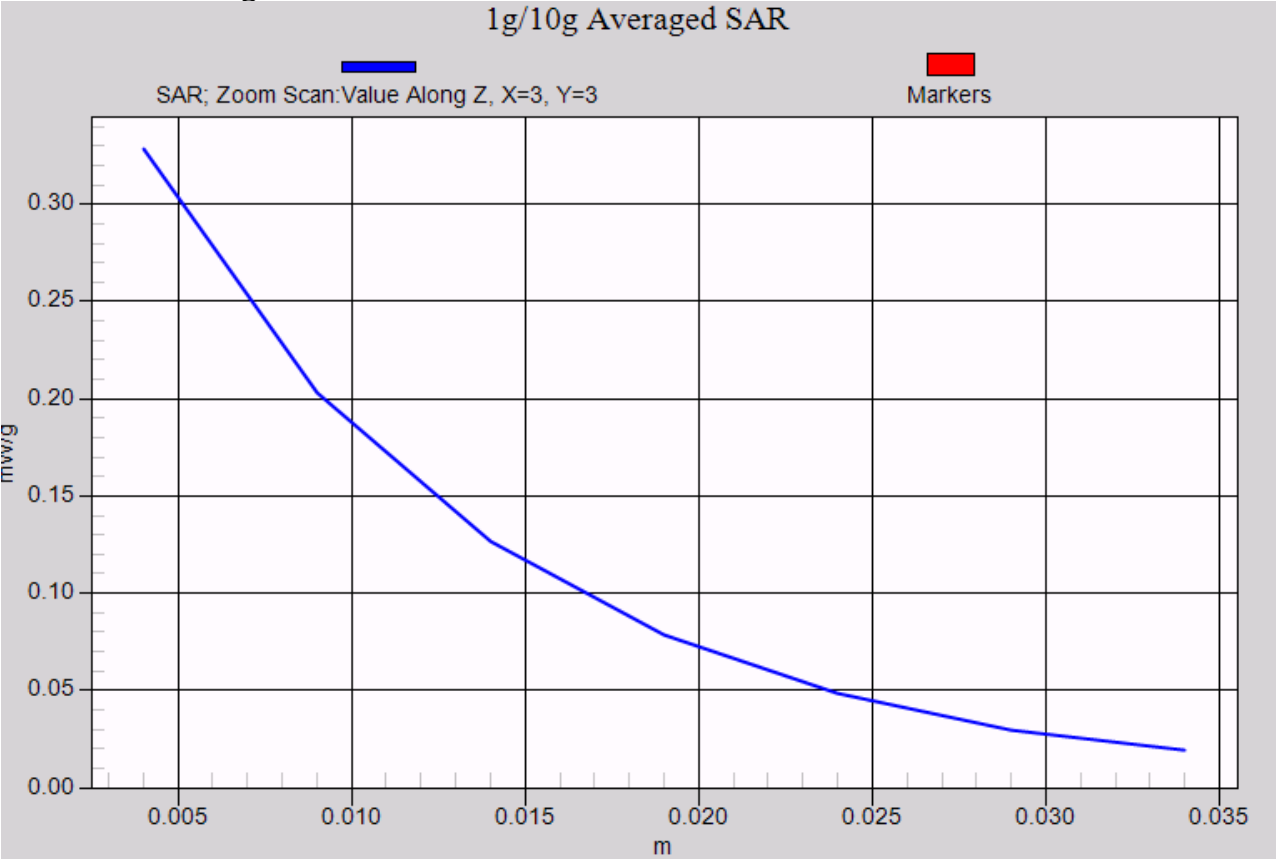




WCDAM FDD II head:

U3100-5 LeftHandSide touched- WCDAM FDD II Channel 9400

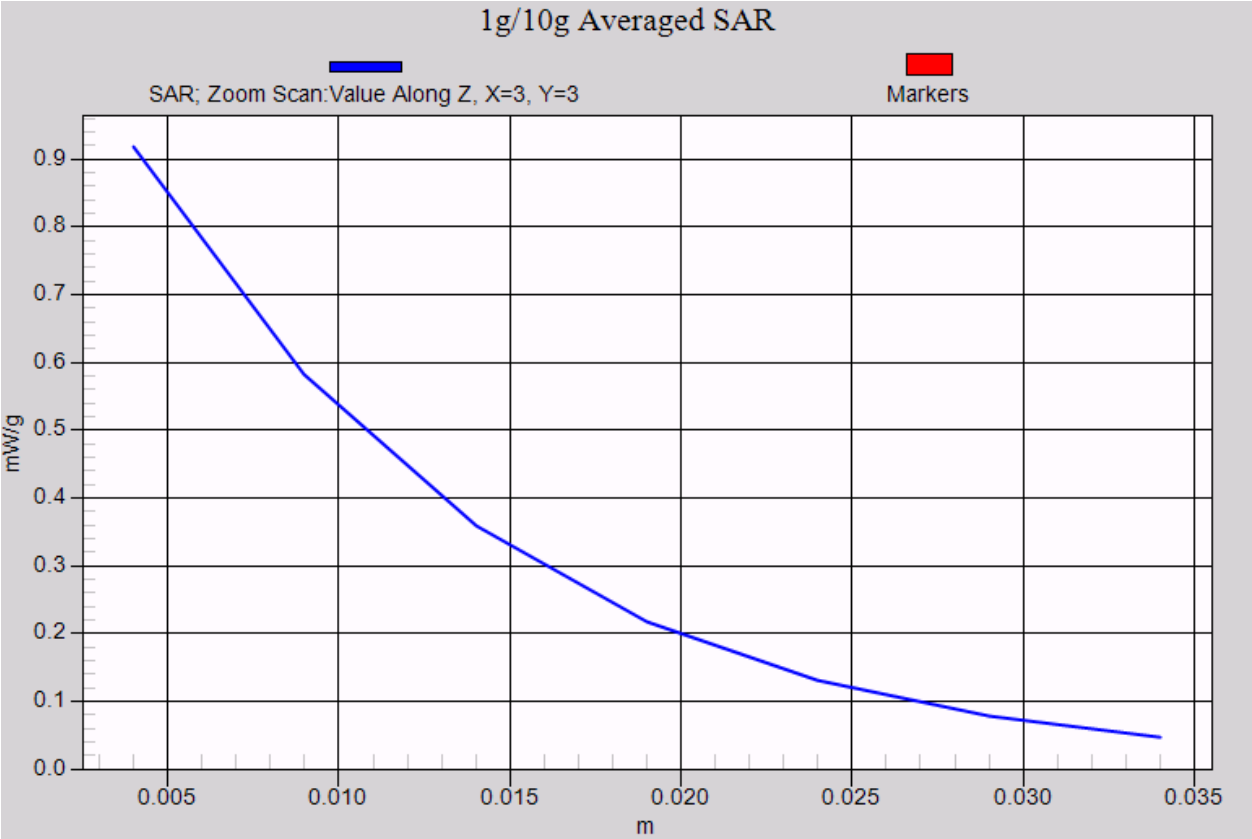


U3100-5 LeftHandSide tilted 15°-WCDAM FDD II Channel 9400

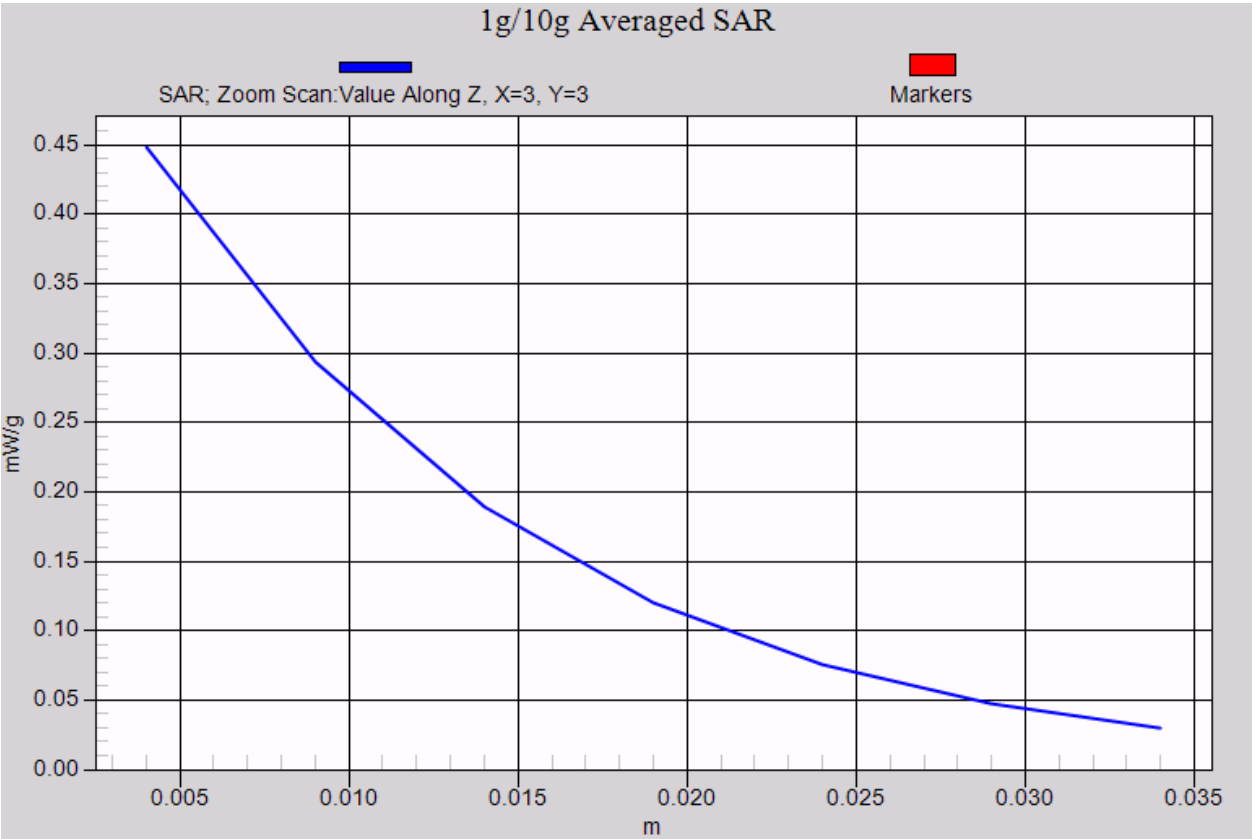




U3100-5 RightHandSide touched- WCDAM FDD II Channel 9400

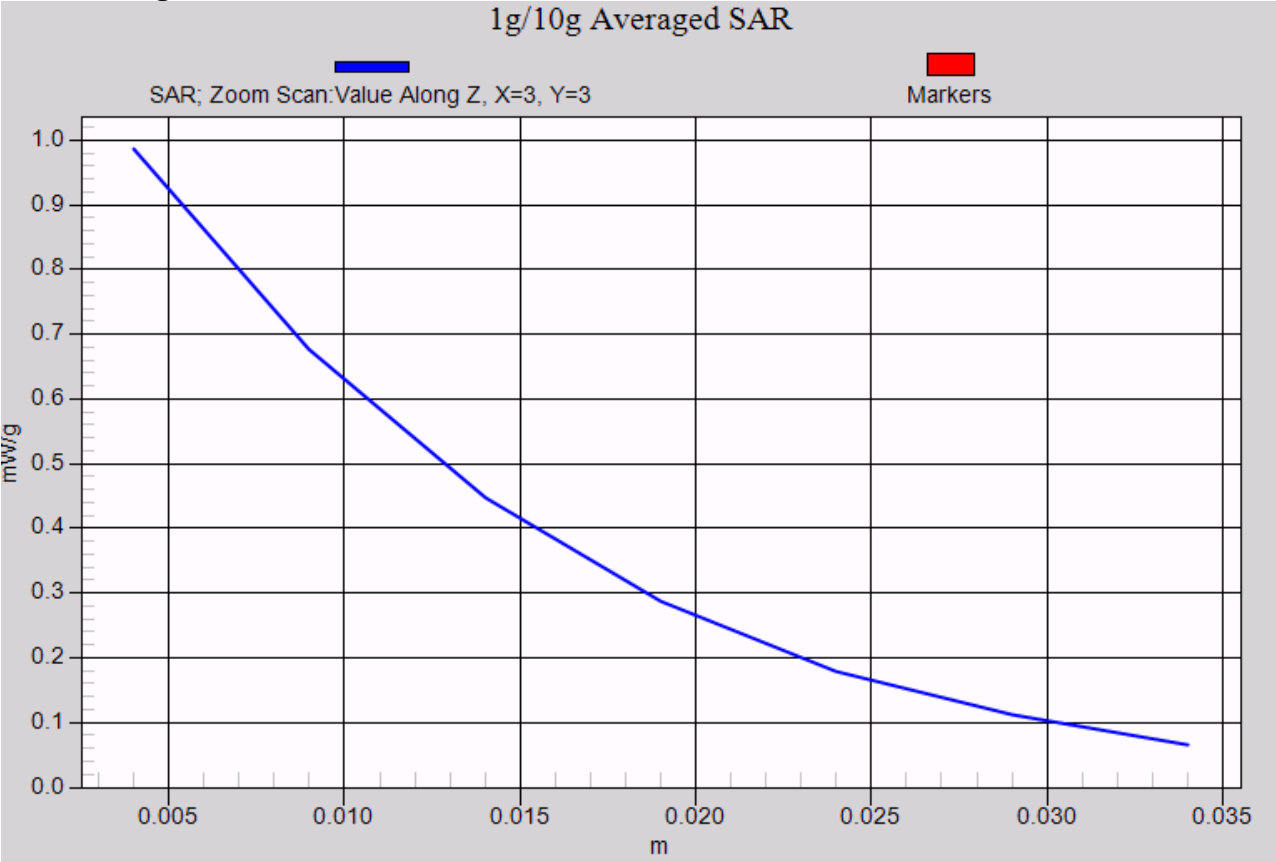


U3100-5 RightHandSide tilted 15°-WCDAM FDD II Channel 9400

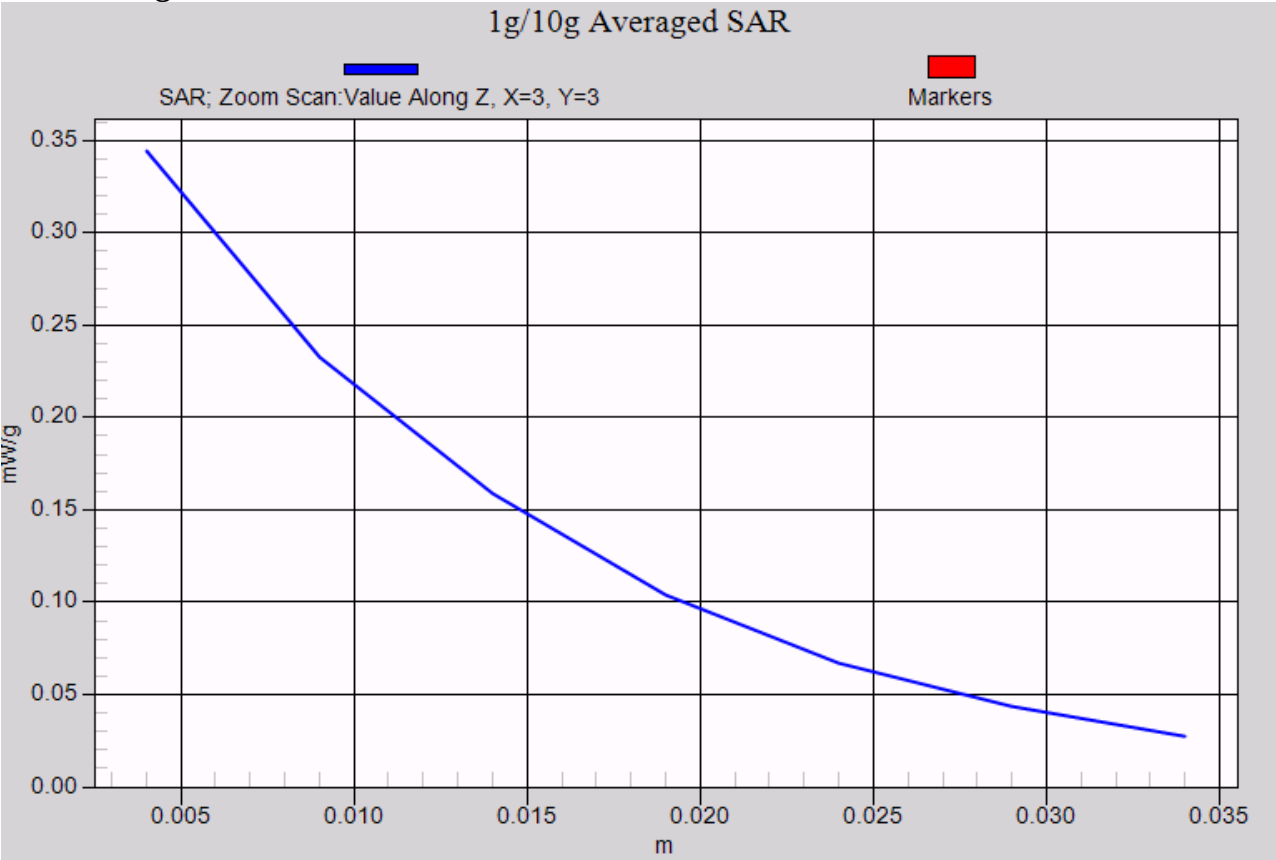




U3100-5 RightHandSide touched- WCDAM FDD II Channel 9538

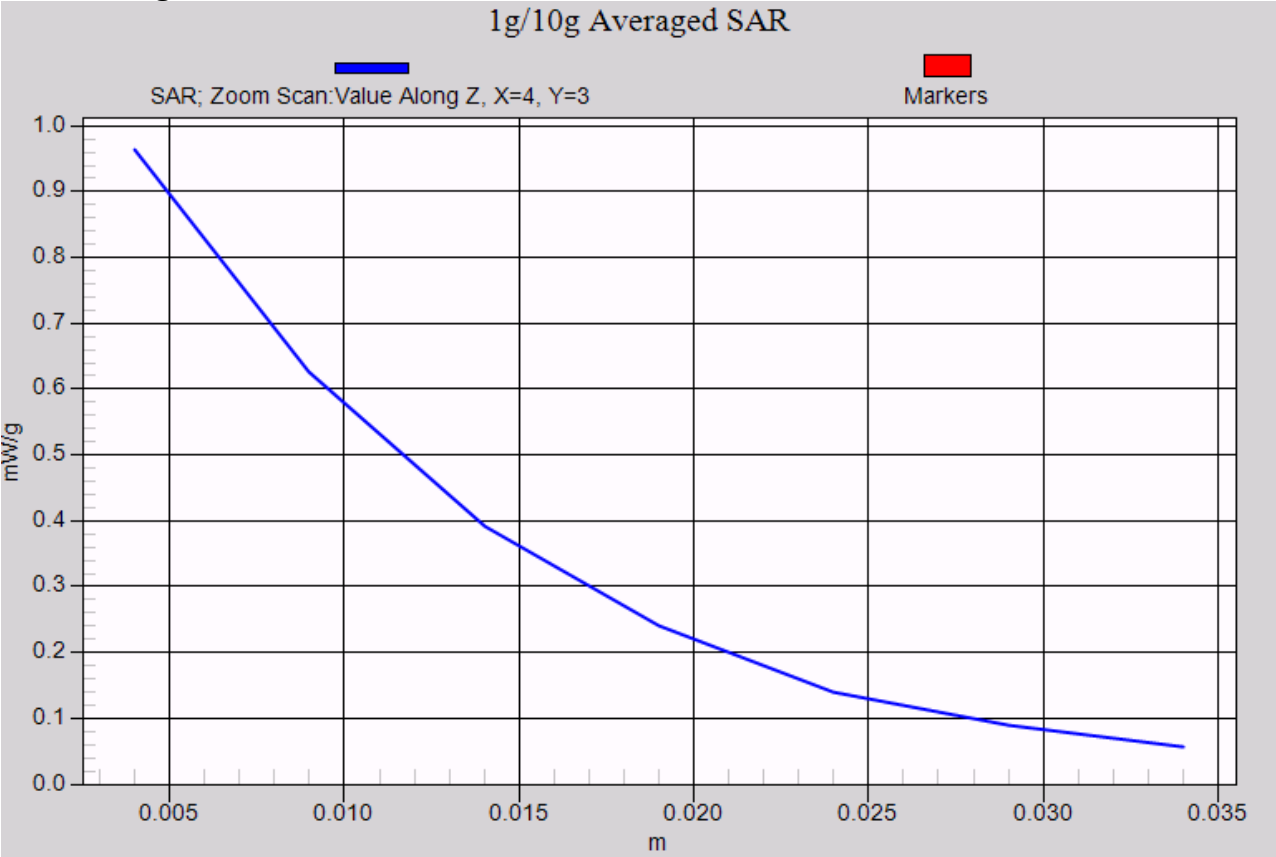



U3100-5 RightHandSide touched- WCDAM FDD II Channel 9262

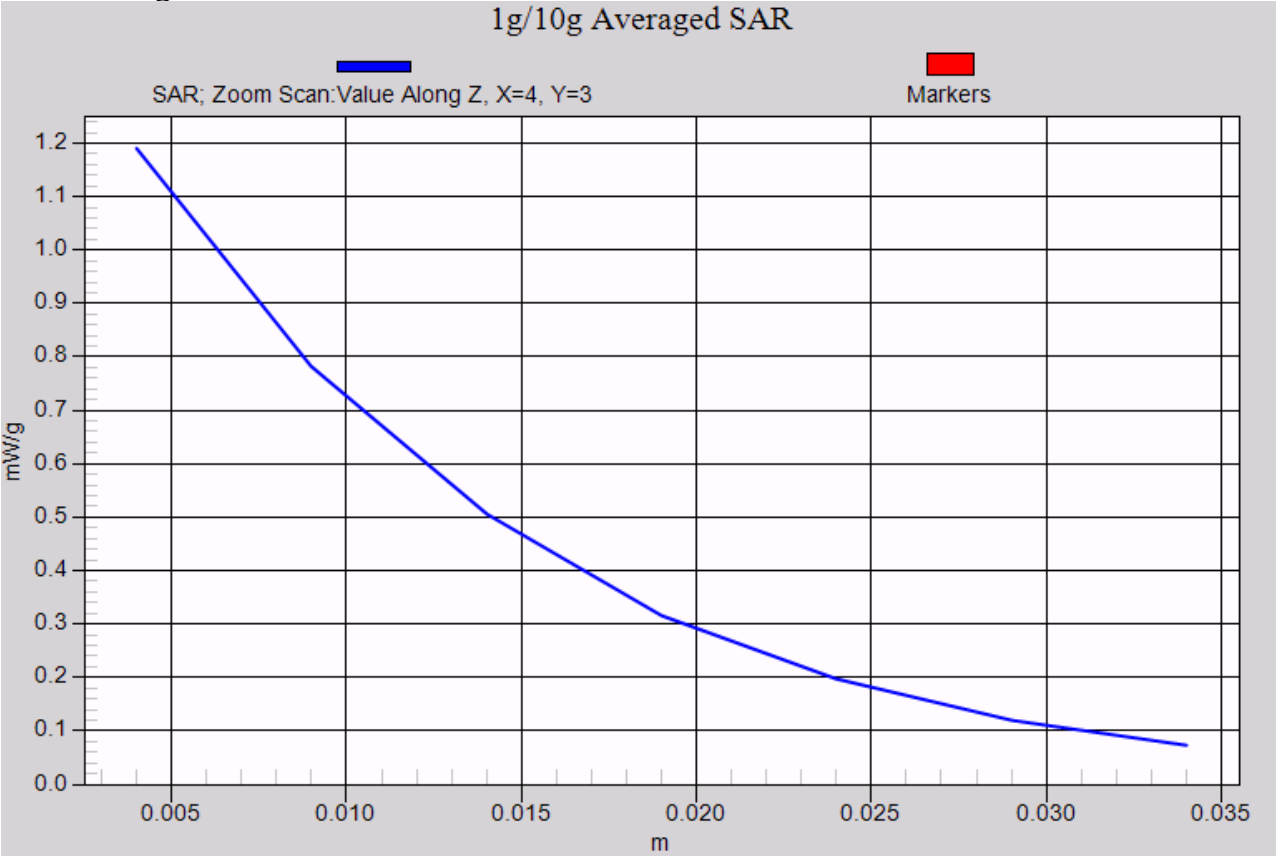




WCDAM FDD II body:

U3100-5 towards phantom- WCDAM FDD II Channel 9400

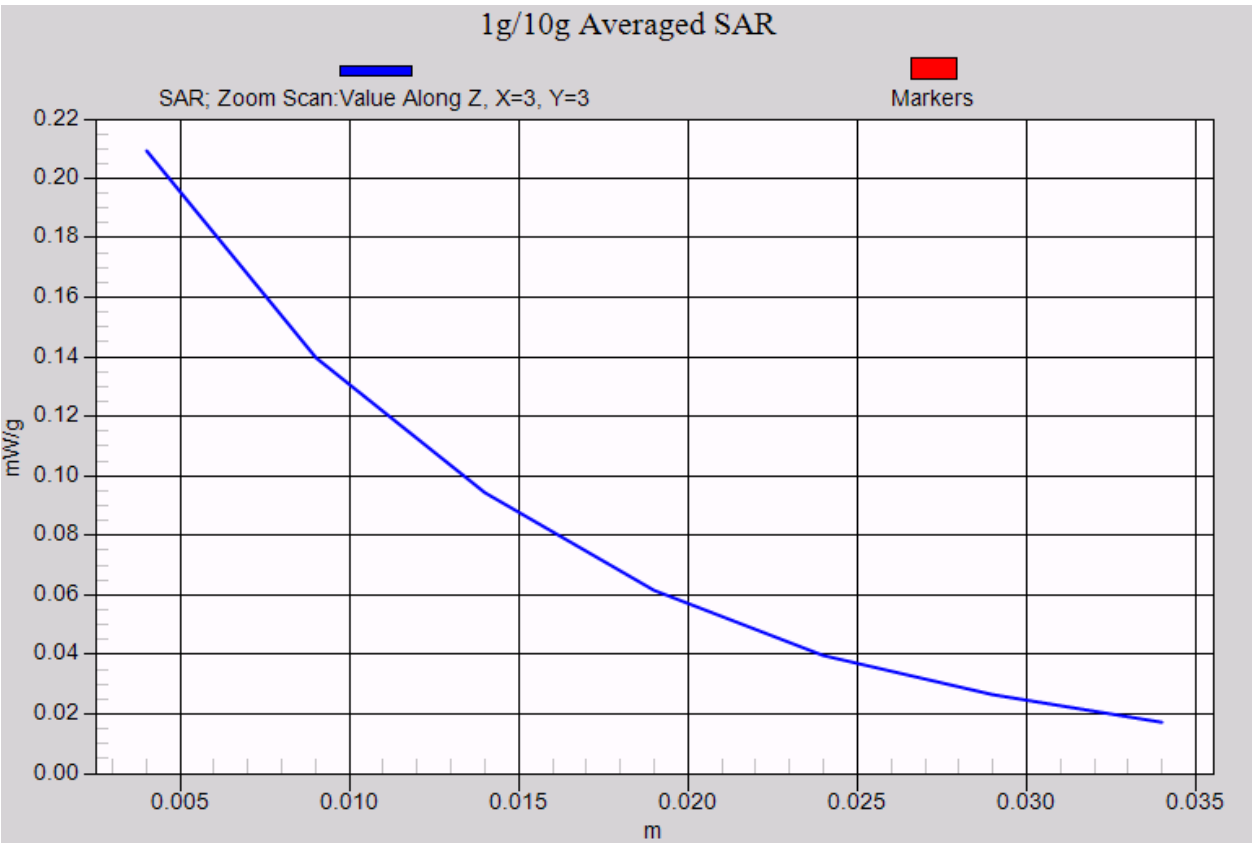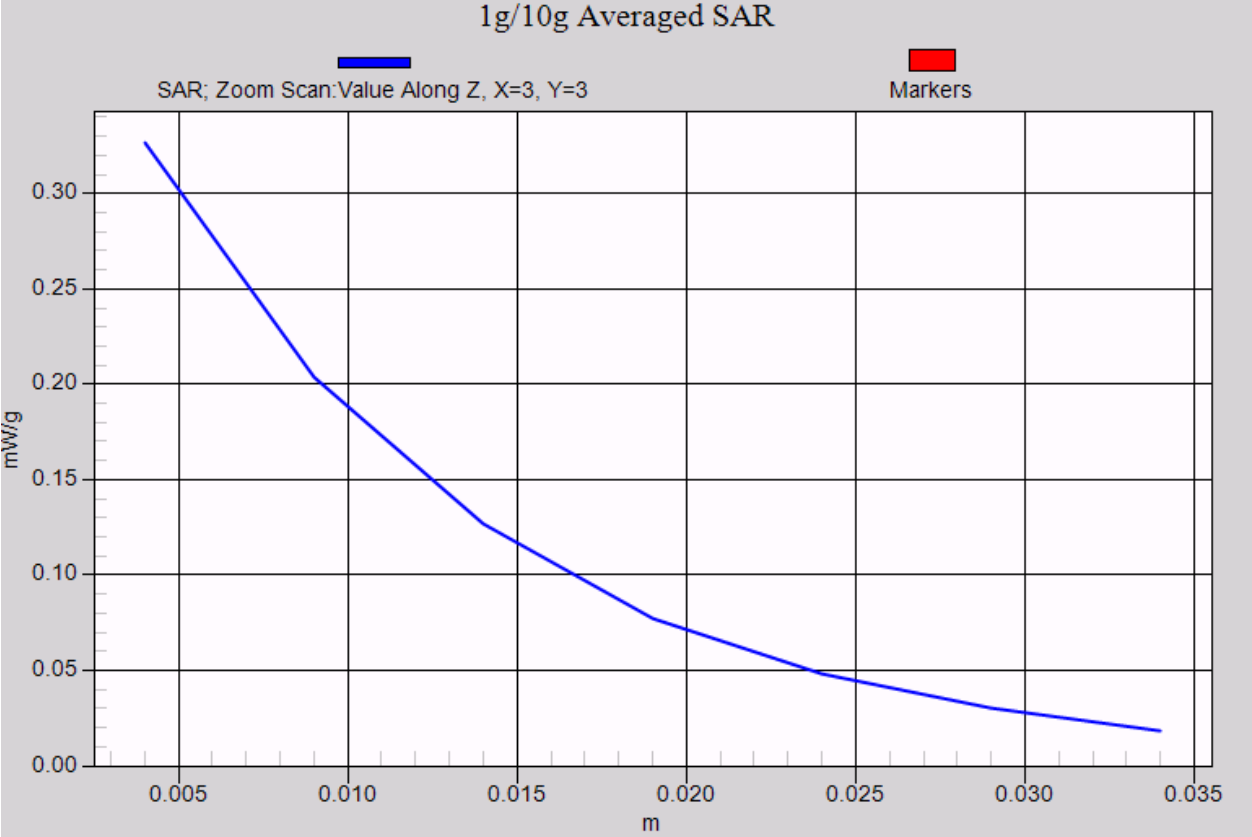




U3100-5 towards ground- WCDAM FDD II Channel 9400

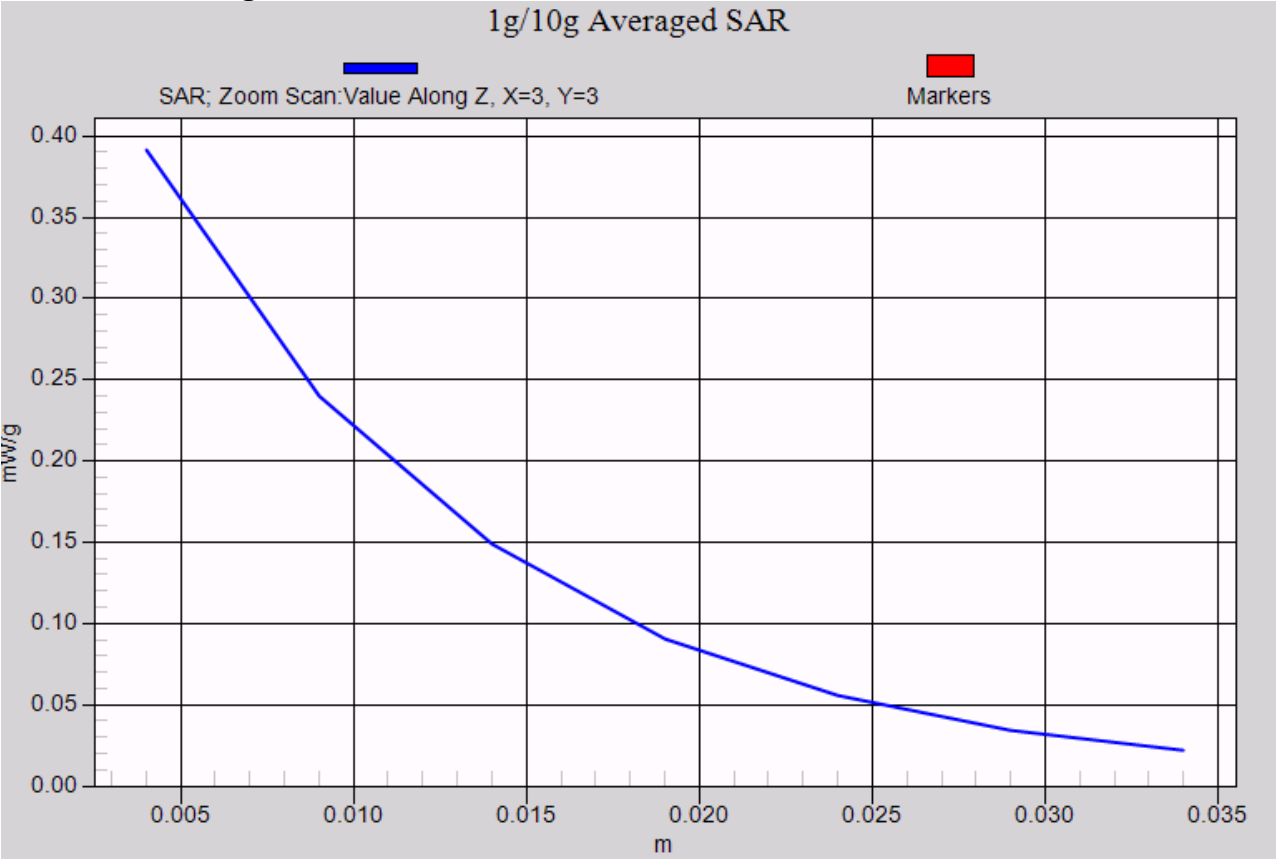


U3100-5 towards ground- WCDAM FDD II Channel 9538

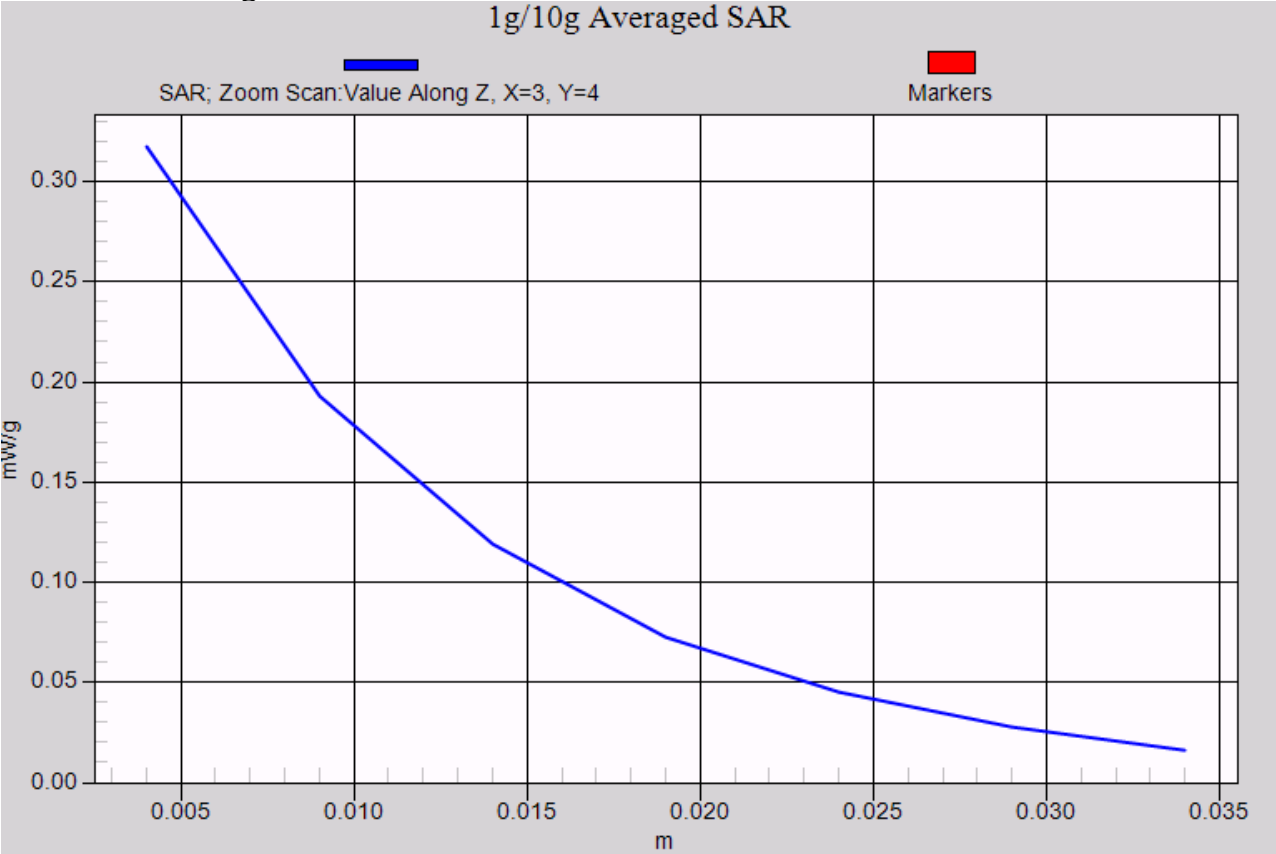




U3100-5 towards ground- WCDAM FDD II Channel 9262

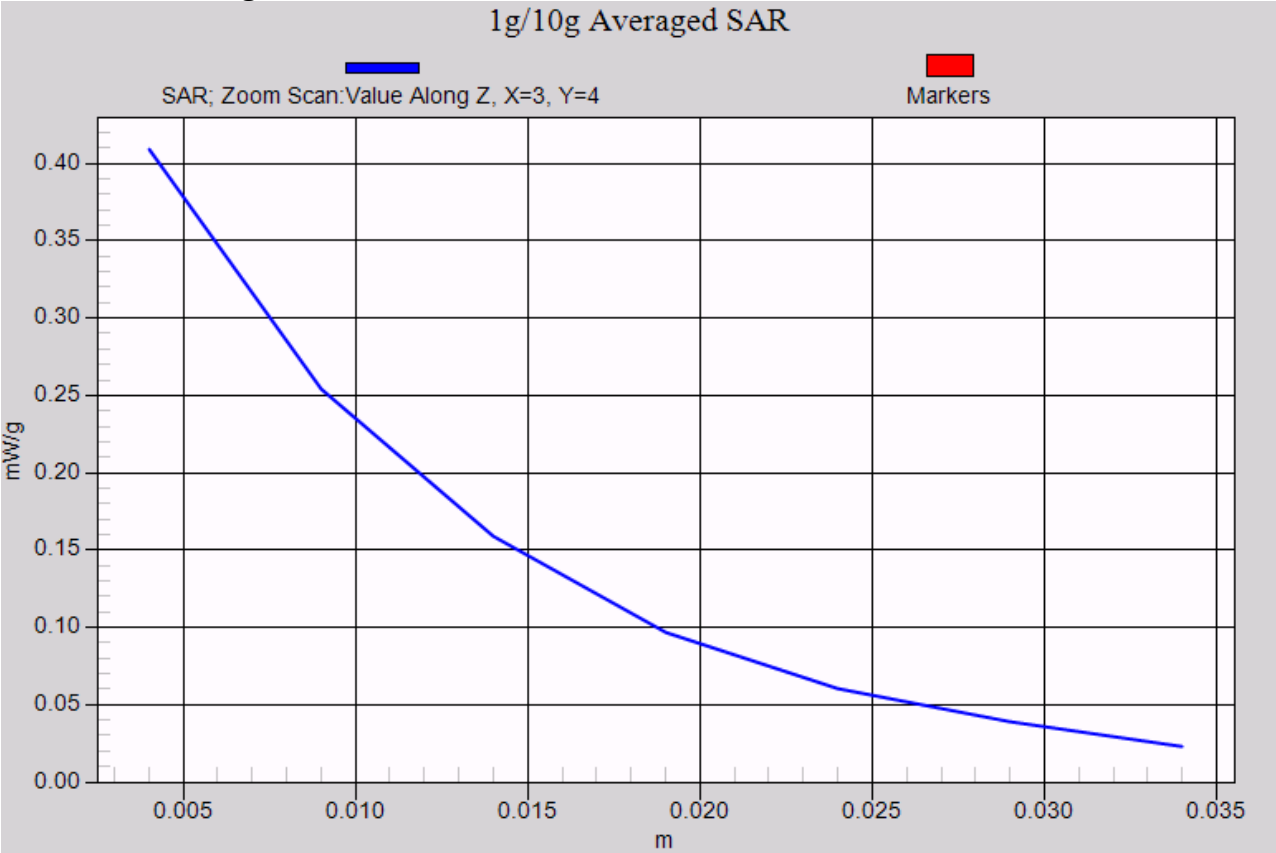


U3100-5 towards ground with Headset- WCDAM FDD II Channel 9262

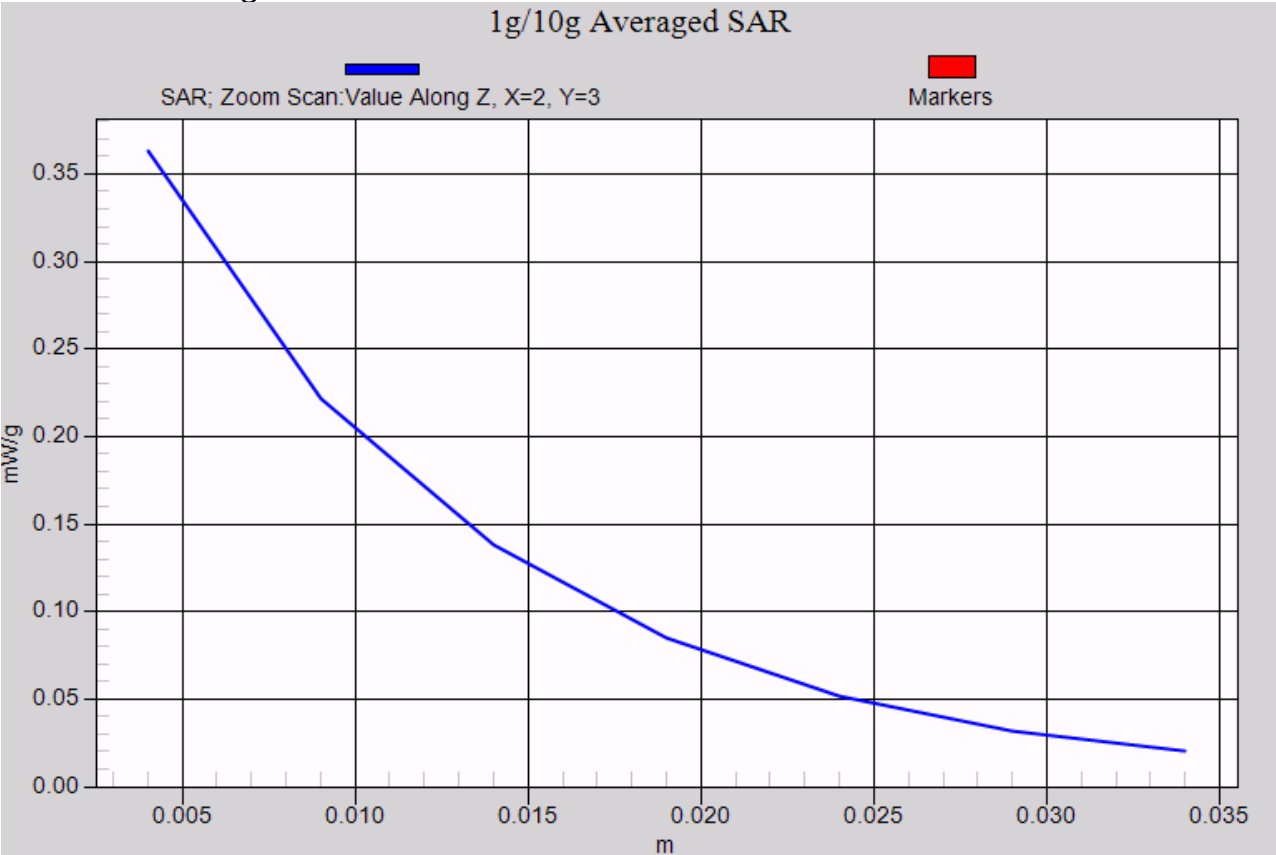



U3100-5 towards ground with Bluetooth Headset- WCDAM FDD II Channel 9262

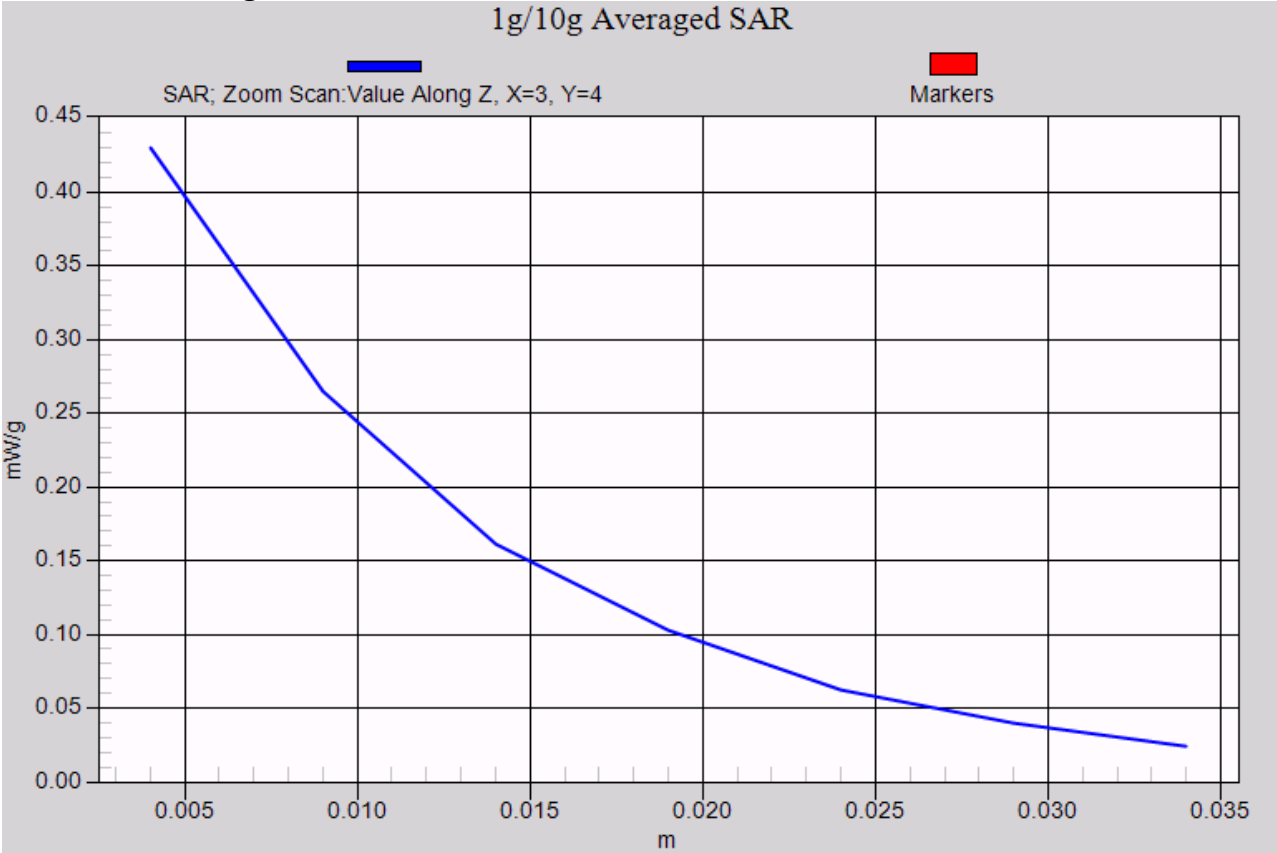

Annex 3 Calibration parameters

Calibration parameters are described in the additional document:

**Appendix to test report no. SYBH(Z-SAR)212012010
Calibration data, Phantom certificate
and detail information of the DASY5 System**


Annex 4 Photo documentation

Annex 4.1 Test Facility

Photo 1: Measurement System DASY5



Photo 2: Measurement System DASY5

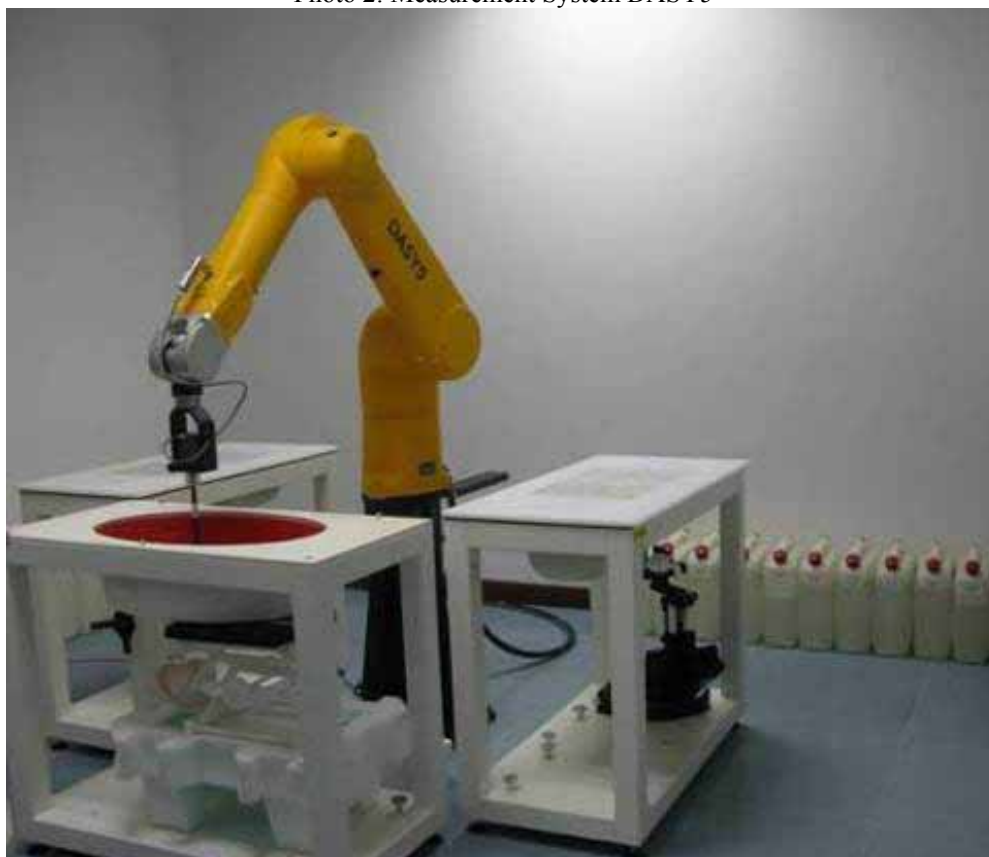

Annex 4.2 Test Positions

Photo 3: U3100-5- front view



Photo 4: U3100-5 - rear view



Photo 5: U3100-5 Test position left hand touched



Photo 6: U3100-5 Test position left hand tilted 15°



Photo 7: U3100-5 Test position right hand touched



Photo 8: U3100-5 Test position right hand tilted 15°



Photo 9: U3100-5 Test position body worn front side with 15 mm distance



Photo 10: U3100-5 Test position body worn rear side with 15 mm distance



Photo 11: U3100-5 Test position body worn rear side (15 mm distance) with headset



Photo 12: U3100-5 Test position body worn rear side (15 mm distance) with bluetooth headset





Annex 4.3 Liquid depth

Photo 13: Liquid depth 900 MHz head simulating liquid

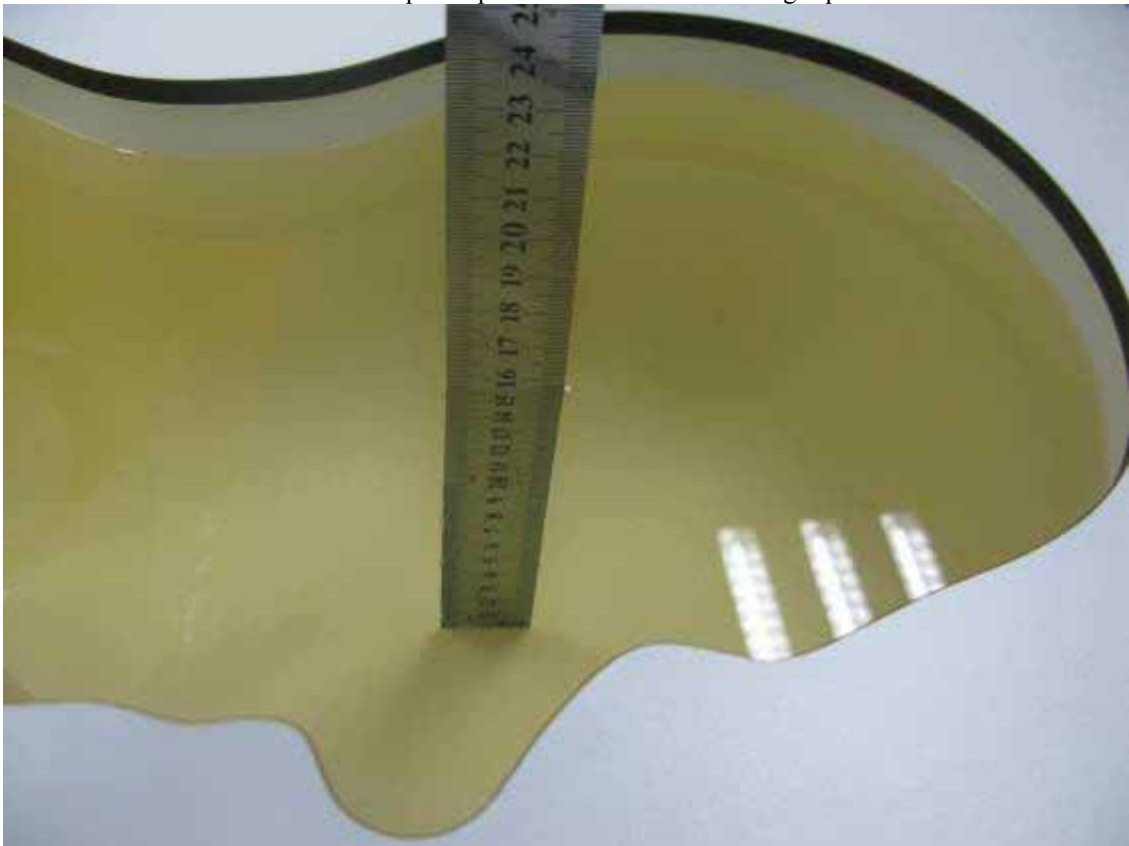


Photo 14: Liquid depth 900 MHz body simulating liquid



Photo 15: Liquid depth 1950 MHz head simulating liquid



Photo 16: Liquid depth 1950 MHz body simulating liquid

