



FCC RF Test Report

**Product Name: HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone
with Bluetooth**

Model Number: U5120-53

**Report No: SYBH(Z-RF)012062012-2001
FCC ID: QISU5120-53**

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Applicant: Huawei Technologies Co., Ltd.
Address: Huawei Base, Bantian, Longgang District, Shenzhen
 518129, P.R. China
Date of Receipt Test Item: Jun, 04, 2012
Start Date of Test: Jun, 05, 2012
End Date of Test: Jun, 15, 2012

Test Result: Pass

Approved By Senior Engineer Jun.18.2012 Dai Linjun *Dai Linjun*
 Date Name Signature

Reviewed By Jun.18.2012 Cousy Xu *Cousy XU*
 Date Name Signature

Operator Jun.18.2012 Huang Qiuliang *Huang Qiuliang*
 Date Name Signature

Contents

1	<u>General Information</u>	5
1.1	APPLIED STANDARD.....	5
1.2	TEST LOCATION.....	5
1.3	TEST ENVIRONMENT CONDITION	5
2	<u>Summary</u>	6
3	<u>Product Description</u>	7
3.1	PRODUCTION INFORMATION	7
3.2	TEST DESCRIPTION.....	8
4	<u>General Test Conditions / Configurations</u>	9
4.1	RF CHANNELS UNDER TEST.....	9
4.2	TEST MODES.....	9
4.3	TEST ENVIRONMENTS	9
4.4	TEST SETUPS.....	10
4.5	TEST CONDITIONS	12
5	<u>Main Test Instruments</u>	14
6	<u>Test Results</u>	15
7	<u>Measurement Uncertainty</u>	16

1 General Information

1.1 Applied Standard

Applied Rules: 47 CFR FCC Part 2:2011, Subpart J
47 CFR FCC Part 22:2011, Subpart H
ANSI/TIA 603C

1.2 Test Location

Test Location 1: Reliability Laboratory of Huawei Technologies Co., Ltd.
Address: Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R.
China

1.3 Test Environment Condition

Ambient Temperature: 20 – 25 °C
Ambient Relative Humidity: 45 – 55 %
Atmospheric Pressure: 101 kPa

2 Summary

Table 1 Summary of results

Cellular Band			
Test Case	FCC Part No.	Requirements	Result
Transmitter Output Power	2.1046 & 22.913	ERP not exceed 7 W Peak-to-average ratio not exceed 13 dB	Pass
Modulation Characteristics	2.1047	Digital modulation	Pass
Occupied Bandwidth	2.1049	(Not specified)	Pass
Band Edges Compliance	2.1051 & 22.917	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 22.917	Below -13 dBm/1 kHz, 9 kHz to 150 kHz Below -13 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 10 th harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 22.917	Below -13 dBm/100 kHz	Pass
Frequency Stability	2.1055 & 22.355	Maintained within the tolerances of ± 2.5 ppm	Pass

3 Product Description

3.1 Production Information

3.1.1 General Description

HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth U5120-53 is subscriber equipment in the WCDMA/GSM system. The UMTS frequency band includes Band II. The GSM/GPRS/EDGE frequency band includes GSM850 & PCS1900, and the GSM850 test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, UMTS and GSM/GPRS/EDGE protocol processing, voice, MMS service, SMS, music player, camera, FM etc. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

3.1.2 Board

Table 1 Board Information

HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth		
U5120-53		
Board and Module		
Description	Software Version	Hardware Version
Main board of Mobile Phone	U5120C32B109	Ver.C

3.1.3 Sub-Assembly

AC/DCAdapter Model	HS-050040U6(02130973)
Manufacturer	HUAWEI
Input Voltage	~ 100-240V 50/60Hz
Output Voltage	≡ 5.0 V 400mA
Rated Power	2W

3.1.4 Battery Technical Data

Battery Model:	HB5D1(24021043)
Rated capacity:	800 mAh
Nominal Voltage:	≡ 3.7 V
Charging Voltage:	≡ 4.2 V

3.2 Test Description

3.2.1 Supported Frequency Range

Characteristics	Description
Downlink	869 to 894 MHz;
Uplink	824 to 849 MHz

3.2.2 Transmitter / Receiver Characteristics

Characteristics	Description
System Type	GSM
TX Output Power (per Antenna Port)	GSM system: 33dBm
Channel Spacing(s) / Bandwidth(s)	GSM system: 200 kHz
Designation of Emissions	GSM system: 247KGXW (GMSK modulation), 244KG7W (8PSK modulation)

3.2.3 Antenna Gain

Antenna Gain(dBi):	-3.66
Antenna Gain(dBd):	-5.81

3.2.4 Power Supply

	Description
Power Supply Type	Directly Connected to DC /AC Power Supply
Input to Adapter (DC power)	DC Voltage Nominal: \approx +3.7V DC Voltage Range: \approx +3.5 V to +4.2V

4 General Test Conditions / Configurations

4.1 RF Channels under Test

Test Mode	TX / RX	RF Channel		
		Bottom (B)	Middle (M)	Top (T)
TM1/TM2	TX	Channel 128	Channel 192	Channel 251
		824.2MHz	837.0MHz	848.8MHz
	RX	Channel 128	Channel 192	Channel 251
		869.2MHz	882.0MHz	893.8MHz

4.2 Test Modes

Test Mode	Test Modes Description
TM1	GSM/GPRS, GMSK modulation
TM2	EDGE, 8PSK modulation

4.3 Test Environments

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.5V
	VN	3.7V
	VH	4.2V


NOTE: VL= lower extreme test voltages
 VN= nominal voltage
 VH= upper extreme test voltage
 TN= nominal temperature

4.4 Test Setups


4.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Ports	Until otherwise declared, all TX tests are ONLY performed at the main Transmitter antenna port (e.g. TRXA, TXA and so on) of the EUT, and all RX tests are ONLY performed at the main Receiver antenna port (e.g. TRXA, RXA and so on) of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

4.4.2 Test Setup 1

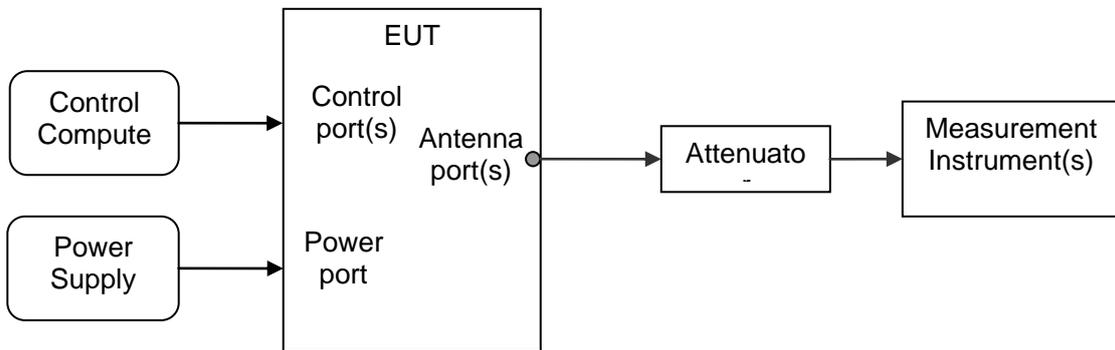


4.4.3 Test Setup 2

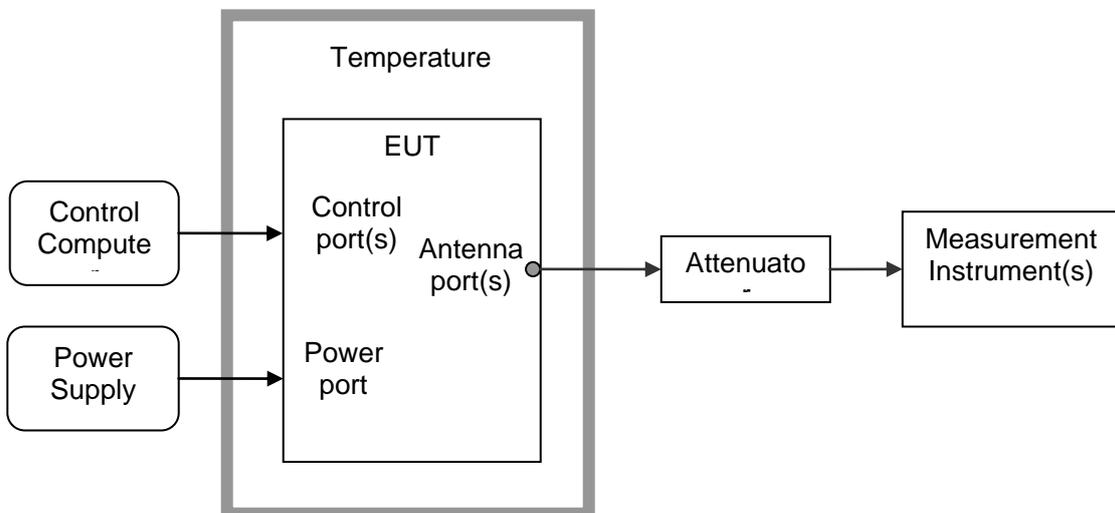


4.4.4 Test Setup 3

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

Step 1: Pre-test

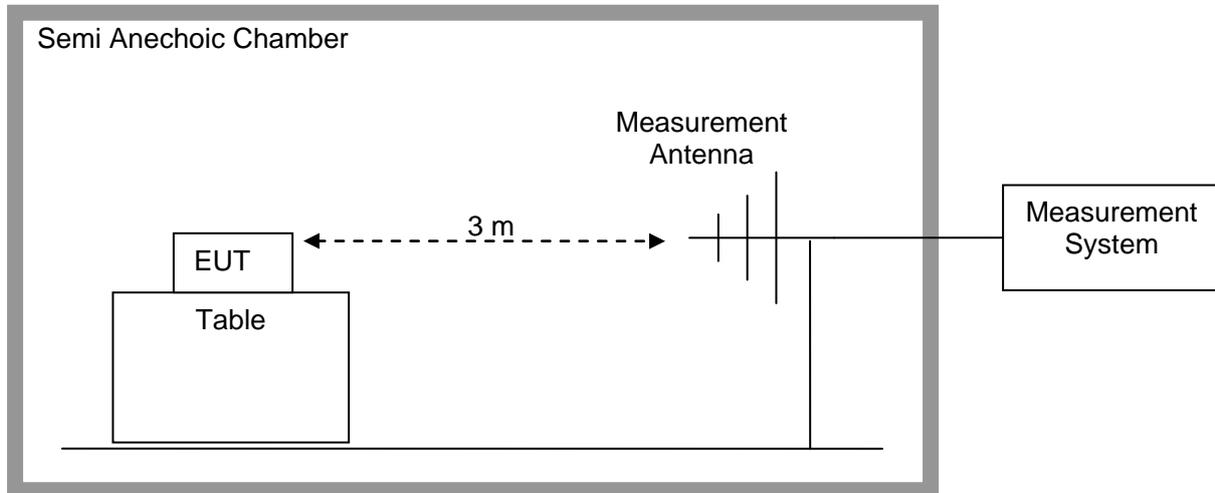

Step 2: Substitution method to verify the maximum ERP

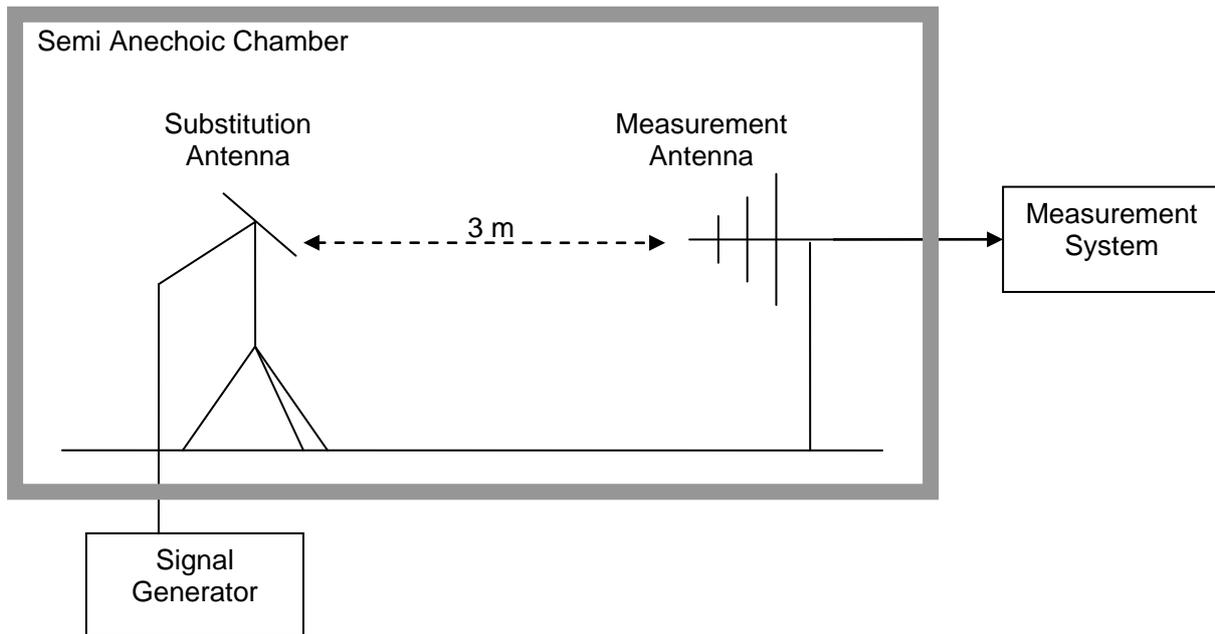

4.5 Test Conditions

Test Case	Test Conditions	
Transmitter Output Power	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1 & Setup 3
	Detector	RMS
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Modulation Characteristics	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	RF Channels (TX)	M
	Test Mode	TM1/TM2
Occupied Bandwidth	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Band Edges Compliance	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	B, T
	Test Mode	TM1/TM2
Spurious Emission at Antenna Terminals	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Field Strength of Spurious Radiation	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	PK
	RF Channels (TX)	M
	Test Mode	TM1/TM2
Frequency Stability	Test Configuration	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) 85%, 100% and 115% of Rated Voltage at Ambient Temperature.
	Test Setup	Test Setup 2



Test Case	Test Conditions	
	RF Channels (TX)	M
	Test Mode	TM1/TM2

5 Main Test Instruments

Table 2 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sep.27,2012
Universal Radio Communication Tester	R&S	CMU200	117341	Jan.12.2013
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug.31,2012
Spectrum Analyzer	Agilent	E4440A	MY48250119	Jul.17,2012
Signal Analyzer	R&S	FSQ31	200021	Sep.27,2012
Temperature Chamber	WEISS	WKL64	24600294	Feb.13,2013
Signal generator	Agilent	E8257D	MY49281095	Jul.09.2012
Test receiver	R&S	ESU26	100150	May.29.2013
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	919/1009	Jan.29.2013
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	Jan.29.2013
Horn Antenna	R & S	HF906	100683	May.15, 2013
Horn Antenna	R & S	HF906	100684	Jul.01, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-357	May.15, 2013
Broadband Antenna	Schwarzbeck	VULB 9163	9163-356	May.15, 2013

6 Test Results

No.	Test Item	Test Result
1	Transmitter Output Power	Appendix A
2	Modulation Characteristics	Appendix B
3	Occupied Bandwidth	Appendix C
4	Band Edges Compliance	Appendix D
5	Spurious Emission at Antenna Terminals	Appendix E
6	Radiated spurious emission	Appendix F
7	Frequency Stability	Appendix G
8	Photos of Radiated Spurious Emissions	Appendix H

NOTE: The Appendix H only photos of Field Strength of Spurious Radiation, no test data.

7 Measurement Uncertainty

For a 95% confidence level ($k=2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmitter Output Power	Power (dBm)	U =0.39 dB
Occupied Bandwidth	Magnitude (%)	U=0.2%
Band Edge Compliance	Disturbance Power (dBm)	U=2.0 dB
Conducted Spurious Emissions	Disturbance Power (dBm)	U=2.0 dB
Field Strength of Spurious Radiation	ERP (dBm)	U=4.6 dB (30 MHz – 1GHz) U=3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy (ppm)	U=0.21 ppm

-----The END-----



Appendix A

Transmitter Output Power According to FCC Part 2.1046 & Part 22.913



Conducted Power of Transmitter

TEST CONDITIONS	RF Output Power (Conducted)					
	Channel128(L)		Channel192(M)		Channel251(H)	
	824.2MHz		837.0MHz		848.8MHz	
	dBm		dBm		dBm	
T_{nom} / V_{nom}	Measured	Limit	Measured	Limit	Measured	Limit
TM1	32.29	38.5	32.33	38.5	32.26	38.5
TM2	26.71	38.5	26.75	38.5	26.55	38.5



Peak-to-Average Ratio

Table 1 Measurement Results


TEST CONDITIONS	Channel128(B)		Channel192(M)		Channel251(T)	
	824.2MHz		837.0MHz		848.8MHz	
	dBm		dBm		dBm	
T_{nom} / V_{nom}	Measured	Limit	Measured	Limit	Measured	Limit
TM1	9.28	13.0	9.84	13.0	9.51	13.0
TM2	12.92	13.0	12.81	13.0	12.35	13.0



Test Plot of Peak-to-Average Ratio

Note: All relevant operation modes have been tested, and the worst case Plot is included in this report.

TM1

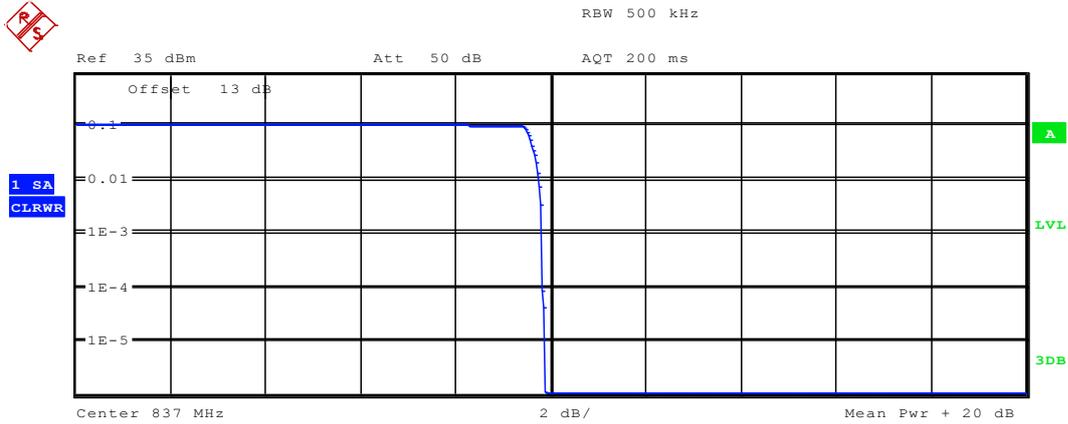


Complementary Cumulative Distribution Function
NOF samples: 100000, Usable BW: 424kHz

Trace 1	
Mean	22.31 dBm
Peak	32.19 dBm
Crest	9.89 dB
10 %	9.46 dB
1 %	9.78 dB
.1 %	9.84 dB
.01 %	9.84 dB

Date: 14.JUN.2012 16:56:20



TM2

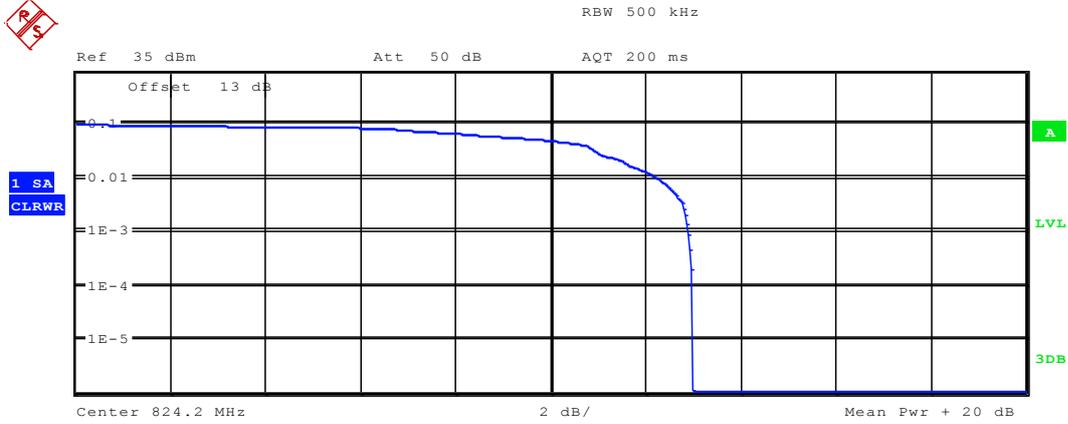

Complementary Cumulative Distribution Function
NOF samples: 100000, Usable BW: 424kHz

Trace 1	
Mean	16.53 dBm
Peak	29.51 dBm
Crest	12.98 dB
10 %	1.86 dB
1 %	12.24 dB
.1 %	12.92 dB
.01 %	12.98 dB

Date: 14.JUN.2012 17:01:14



Effective Radiated Power of Transmitter (ERP)

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBi]	Cable Loss [dB]	Substitution Level (ERP)	FCC limit [dBm]	Result
							[dBm]		
TM1	824.2	26.48	Dipole Ant.	29.80	-2.75	0.6	26.45	38.5	Pass
TM1	837.0	26.52	Dipole Ant.	30.03	-2.87	0.6	26.56	38.5	Pass
TM1	848.8	26.45	Dipole Ant.	29.86	-2.85	0.6	26.41	38.5	Pass
TM2	824.2	20.90	Dipole Ant.	24.27	-2.75	0.6	20.92	38.5	Pass
TM2	837.0	20.94	Dipole Ant.	24.44	-2.87	0.6	20.97	38.5	Pass
TM2	848.8	20.74	Dipole Ant.	24.23	-2.85	0.6	20.78	38.5	Pass

Note: a, For getting the ERP (Efficient Radiated Power) in substitution method, the following formula should be taken to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBi]}$$

b, SGP=Signal Generator Level

-----The END-----




Appendix B

Modulation Characteristics

According to FCC Part 2.1047 & Part22 Subpart H




Channel 192 (TM1:GPRS/GSM)

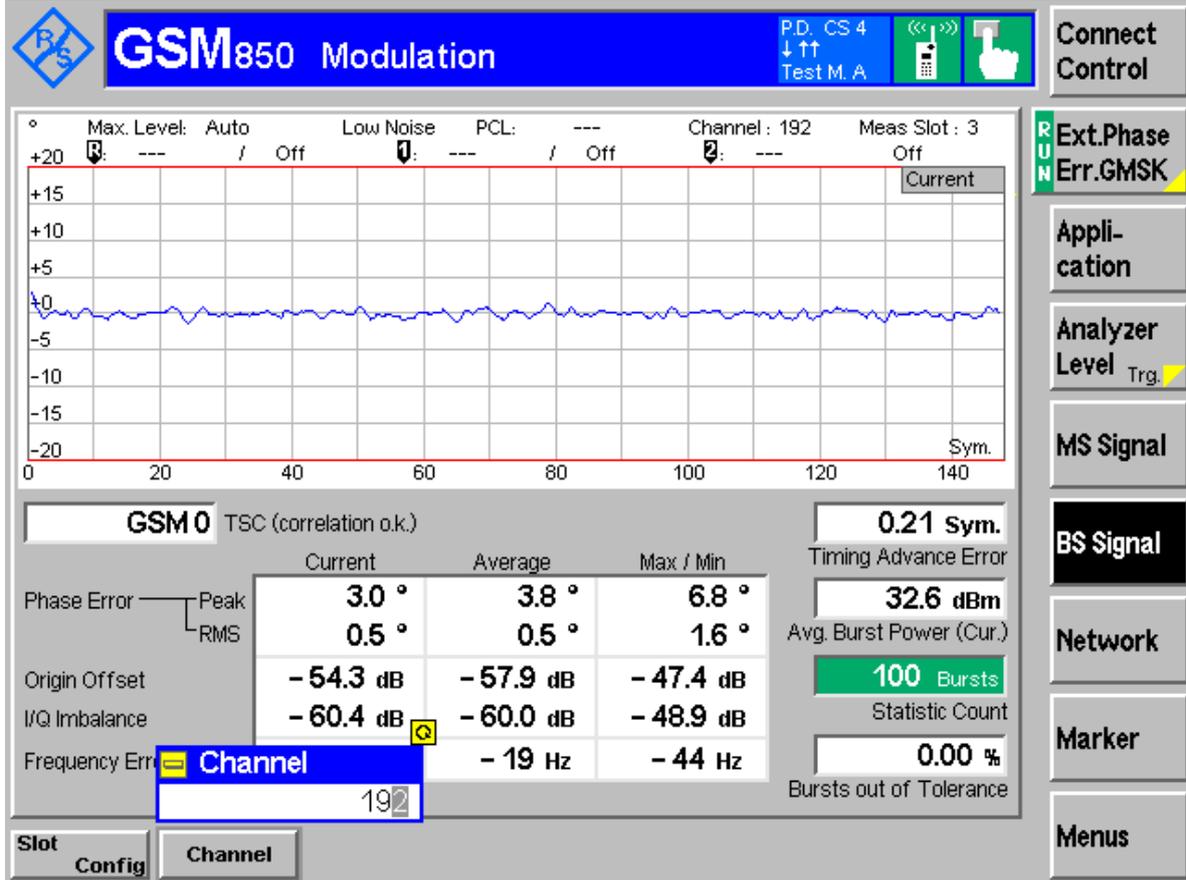



Channel 192 (TM2:EDGE)

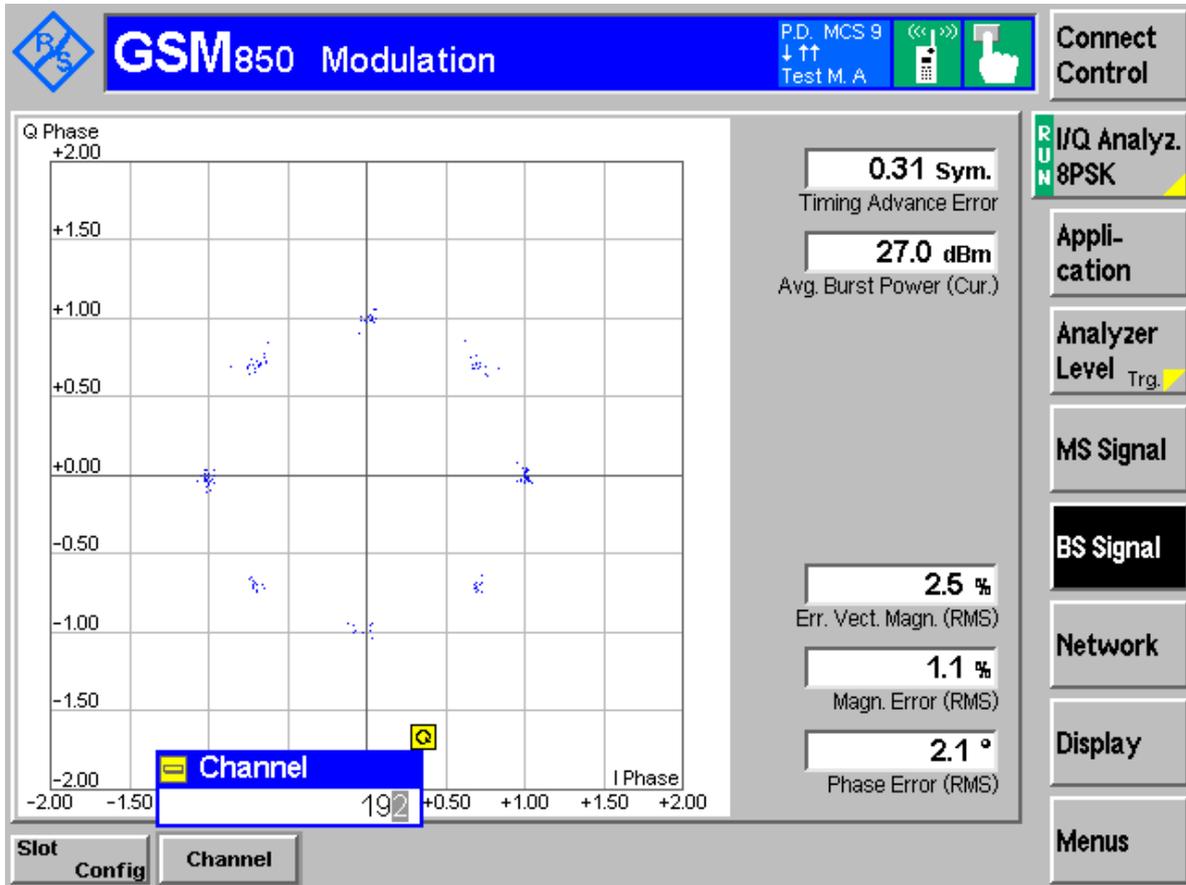

-----The END-----



Appendix C

Occupied Bandwidth According to FCC Part 2.1049 & Part 22 Subpart H




Result Table

Table 1 Measurement Results

Test Mode	RF Channel	Occupied Bandwidth [kHz]	Verdict
TM1	128	246.79	Pass
	192	243.59	Pass
	251	243.59	Pass
TM2	128	243.59	Pass
	192	241.99	Pass
	251	237.18	Pass



Channel 128 (TM1:GPRS/GSM)

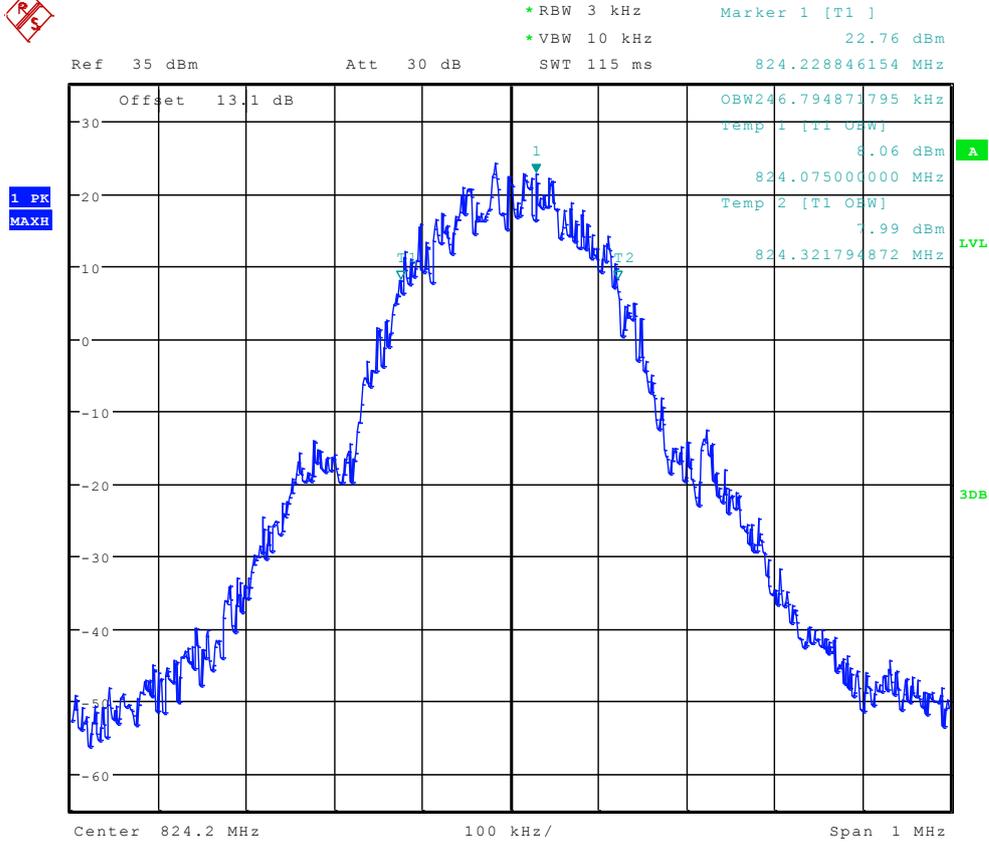


Date: 5.JUN.2012 15:16:17



Channel 128 (TM2:EDGE)




Ref 35 dBm Att 30 dB *RBW 3 kHz Marker 1 [T1] 19.45 dBm
 *VBW 10 kHz SWT 115 ms 824.235256410 MHz

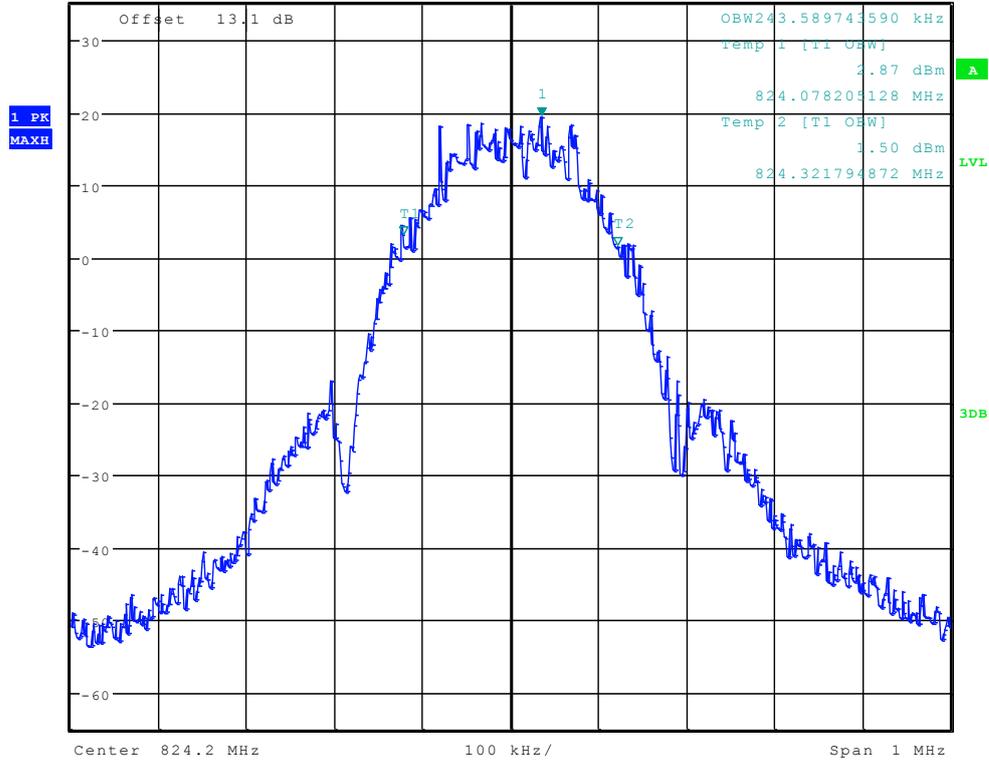

Date: 5.JUN.2012 15:21:51




Channel 192 (TM1:GPRS/GSM)

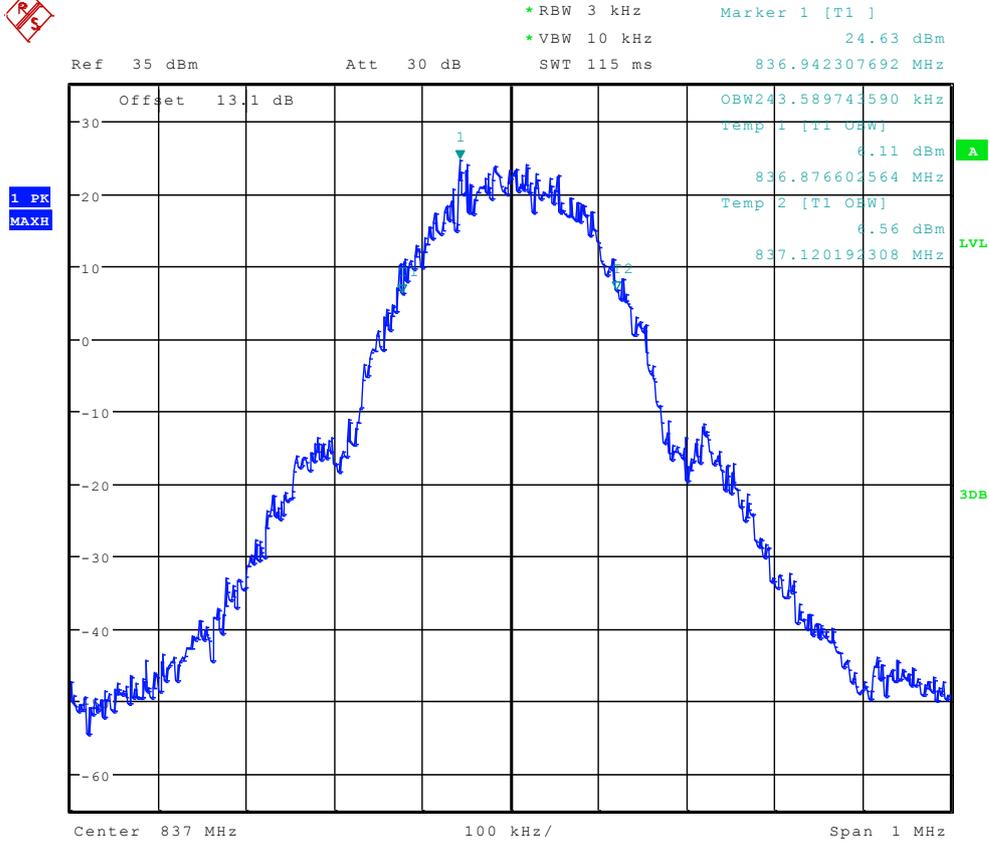

Date: 5.JUN.2012 15:16:31



Channel 192 (TM2:EDGE)

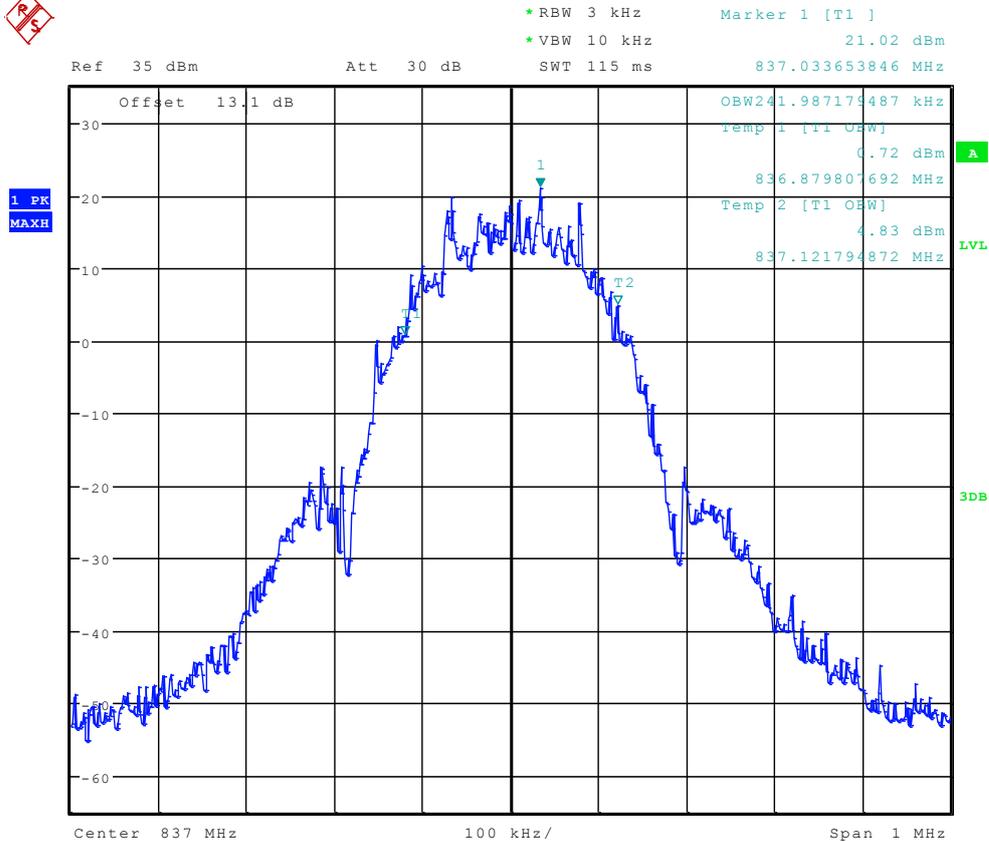

Date: 5.JUN.2012 15:22:05



Appendix D

Band Edges Compliance


According to FCC Part 2.1051 & Part22 Subpart H



TM1:GPRS/GSM

Left Edge

Channel 128

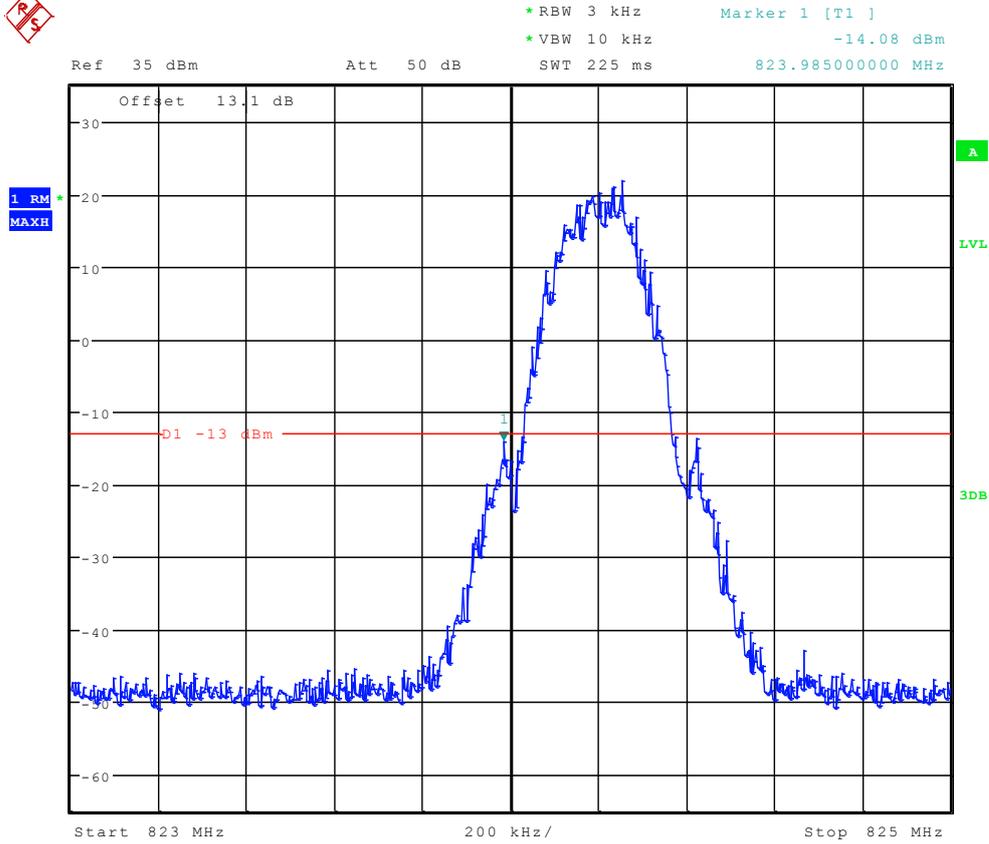


Date: 5.JUN.2012 15:19:53



Right Edge Channel 251



Ref 35 dBm Att 50 dB RBW 3 kHz Marker 1 [T1] -14.70 dBm
SWT 225 ms 849.02000000 MHz

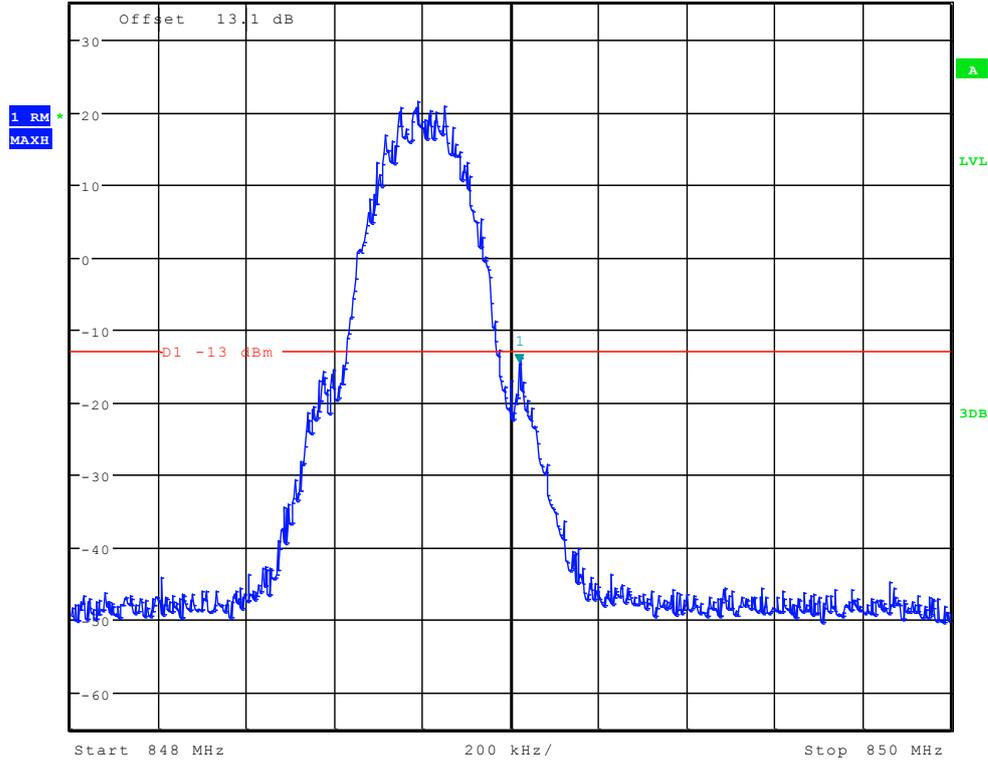


Date: 5.JUN.2012 15:20:13



TM2:EDGE

Left Edge

Channel 128

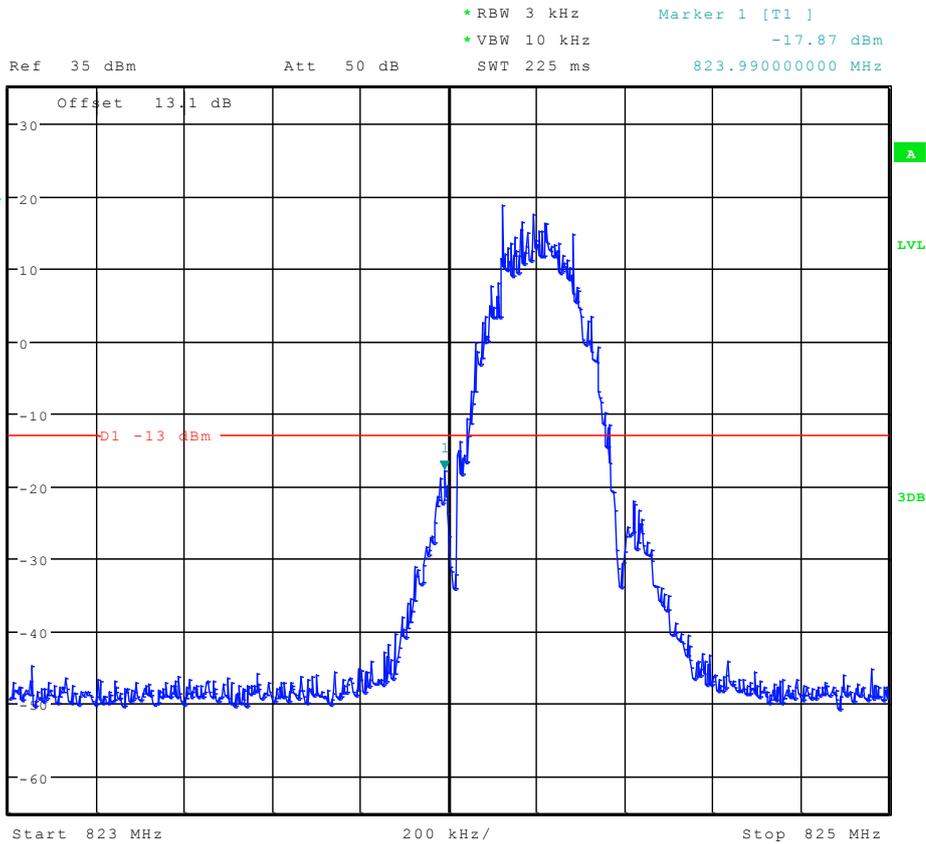


Date: 5.JUN.2012 15:25:31



Right Edge Channel 251



Ref 35 dBm Att 50 dB RBW 3 kHz Marker 1 [T1] -18.91 dBm
SWT 225 ms 849.01500000 MHz

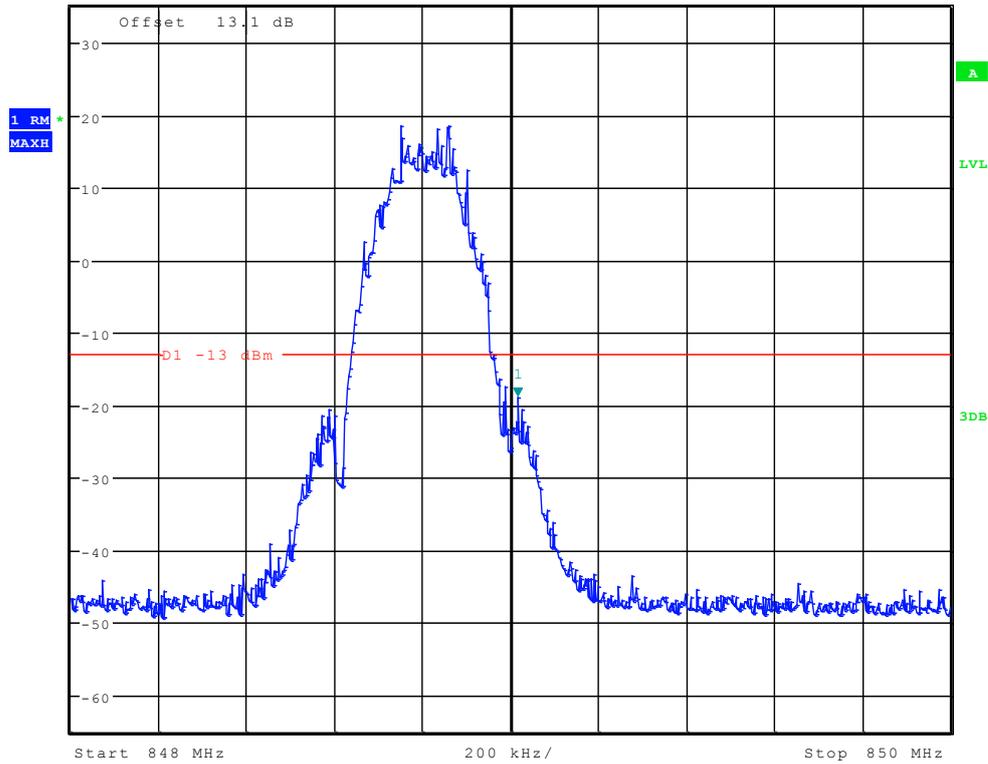

Date: 5.JUN.2012 15:26:25

-----The END-----



Appendix E

Spurious Emission at Antenna Terminal

According to FCC Part 2.1051 & Part22 Subpart H




TM1:GPRS/GSM

Channel 128



Ref 35 dBm Att 50 dB SWT 145 ms


*RBW 1 kHz Marker 1 [T1] -35.92 dBm
*VBW 10 kHz 9.000000000 kHz

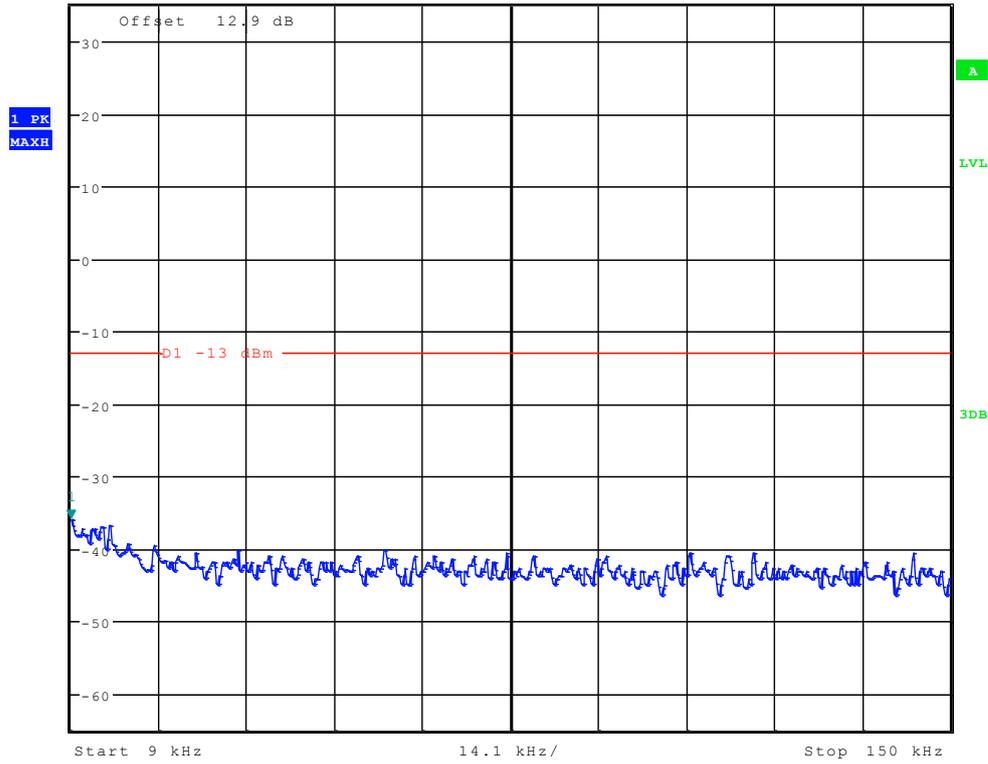

Date: 5.JUN.2012 15:16:59




*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -31.27 dBm
Ref 35 dBm Att 50 dB SWT 300 ms 197.836538462 kHz

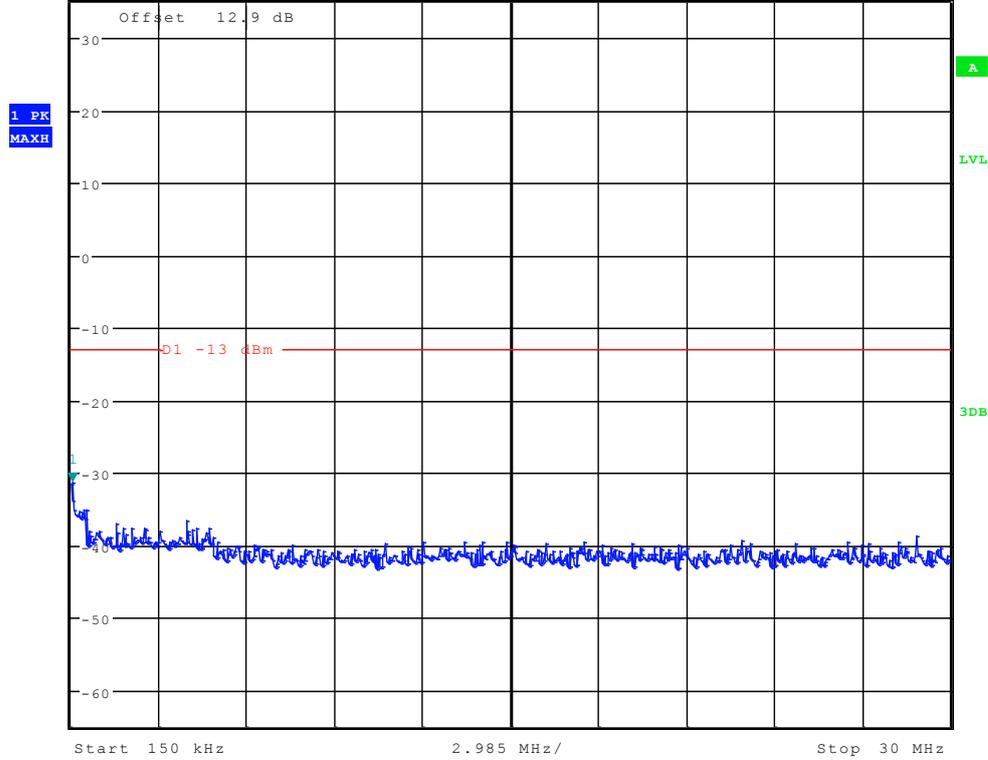

Date: 5.JUN.2012 15:17:43




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 32.82 dBm
Ref 35 dBm Att 50 dB SWT 100 ms 825.897435897 MHz

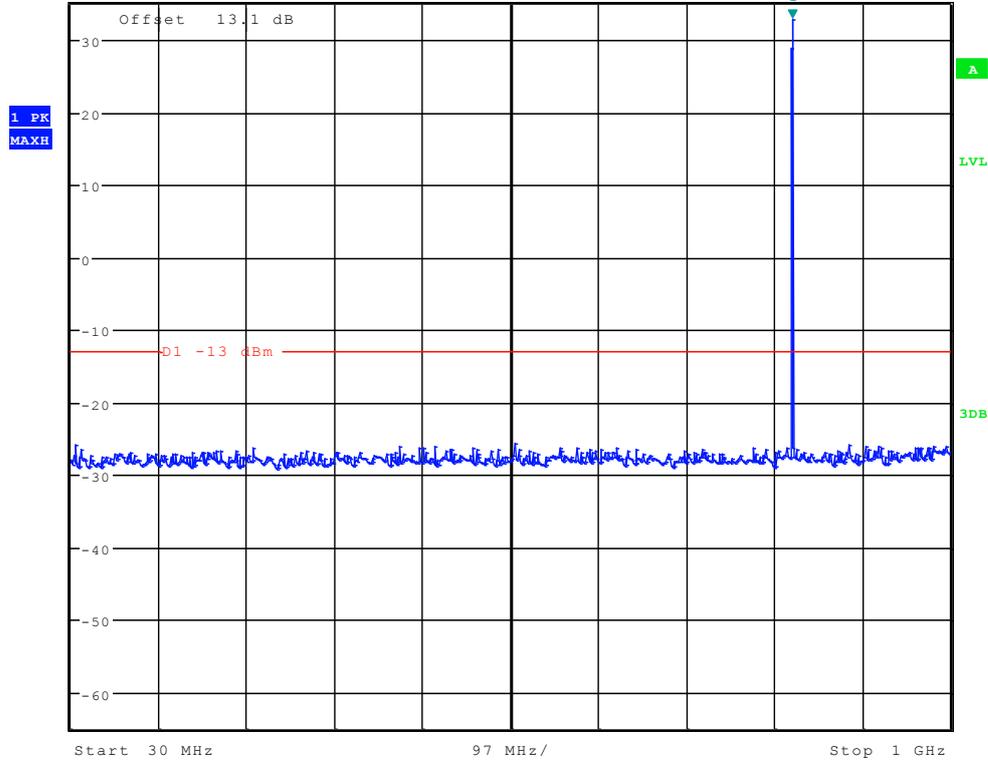

Date: 5.JUN.2012 15:18:26



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -14.31 dBm
SWT 70 ms 2.751201923 GHz

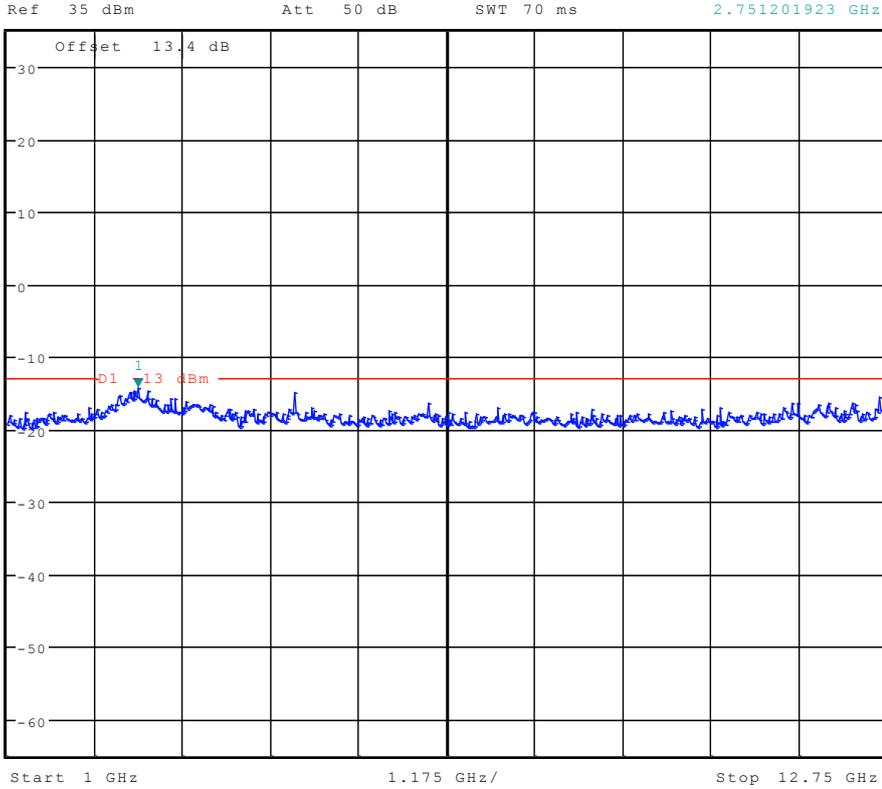


Date: 5.JUN.2012 15:19:10




Channel 192



Ref 35 dBm Att 50 dB *RBW 1 kHz Marker 1 [T1] -36.19 dBm
 *VBW 10 kHz SWT 145 ms 11.259615385 kHz

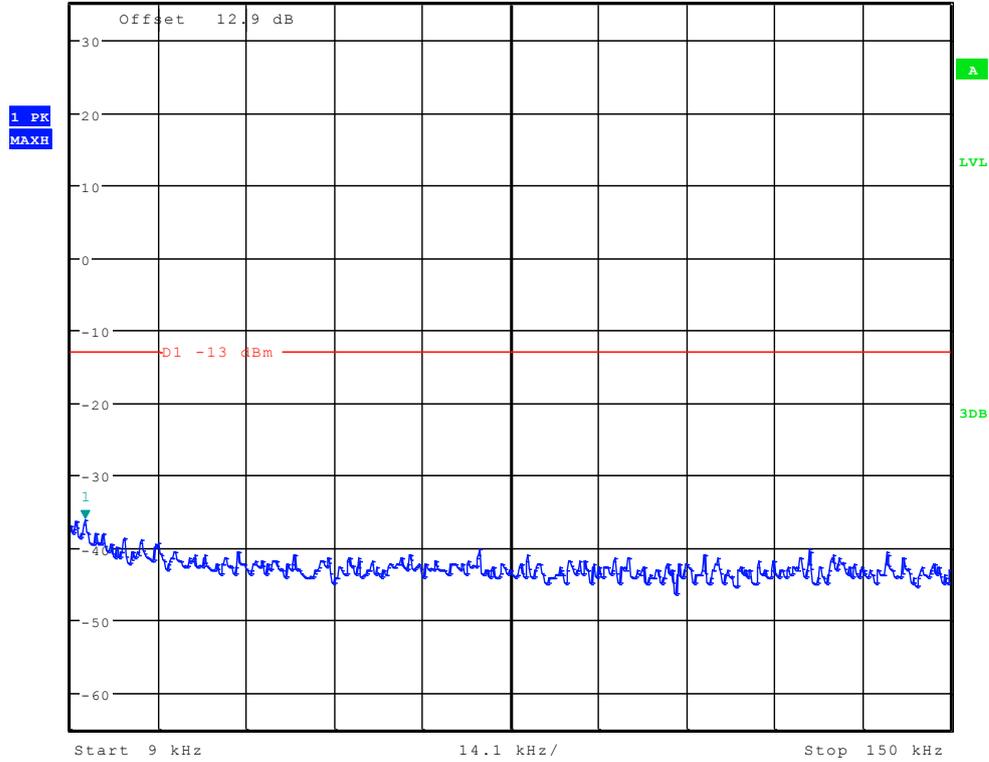


Date: 5.JUN.2012 15:17:14

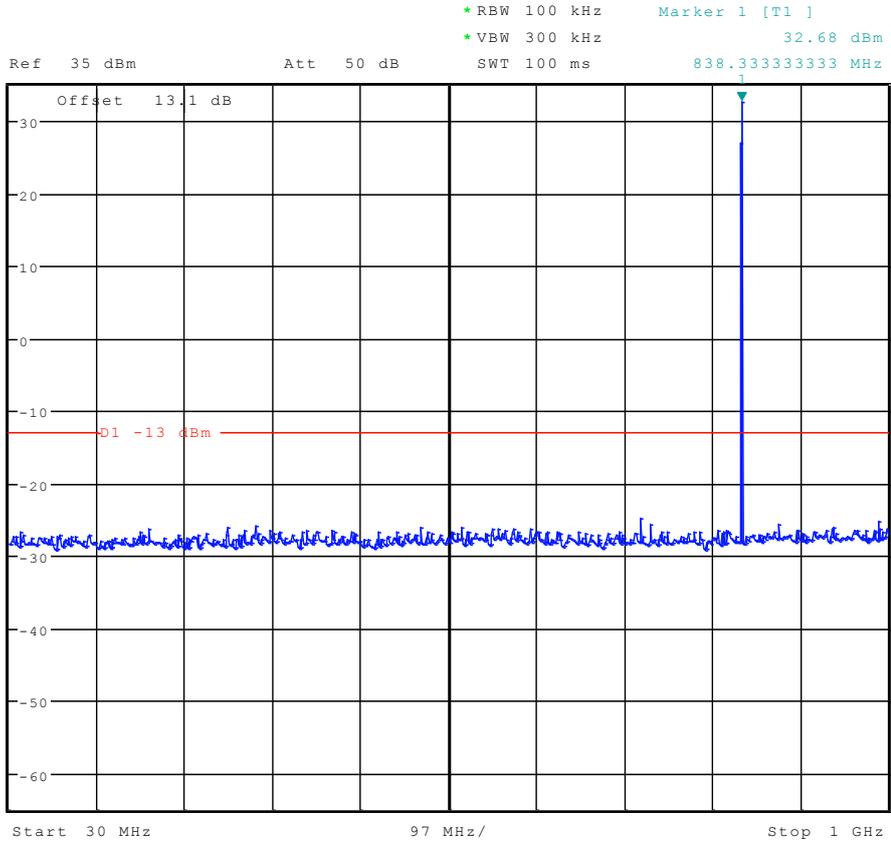

Date: 5.JUN.2012 15:18:41



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -13.75 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.864182692 GHz

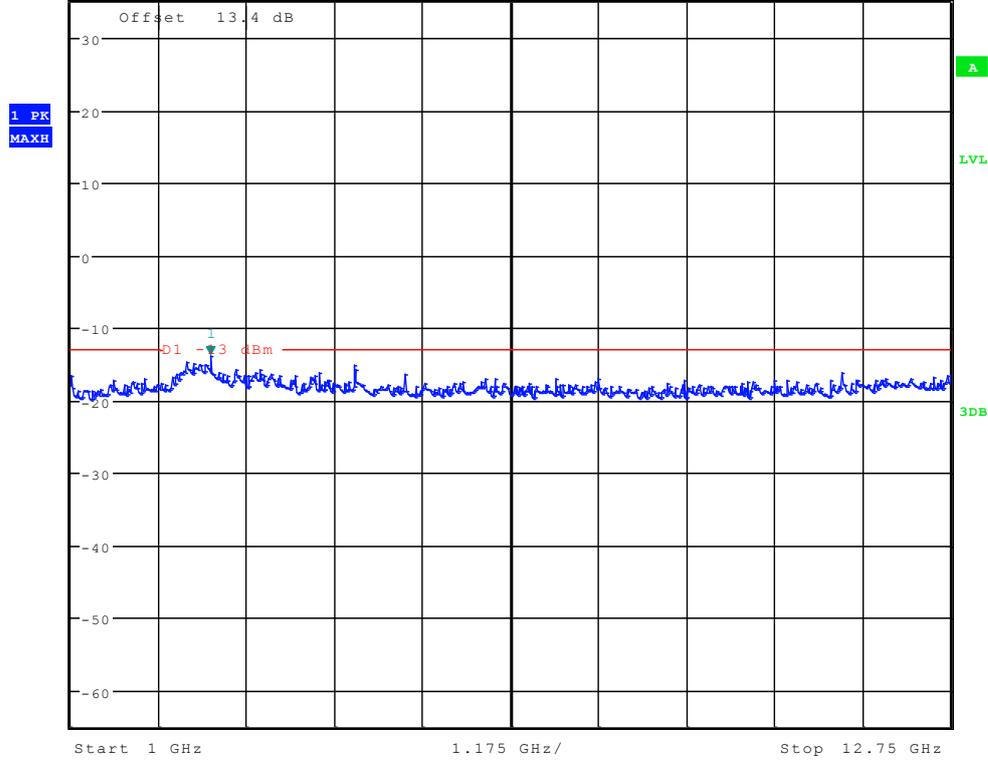


Date: 5.JUN.2012 15:19:25



Channel 251




*RBW 1 kHz Marker 1 [T1]
 *VBW 10 kHz -36.38 dBm
 Ref 35 dBm Att 50 dB SWT 145 ms 10.355769231 kHz

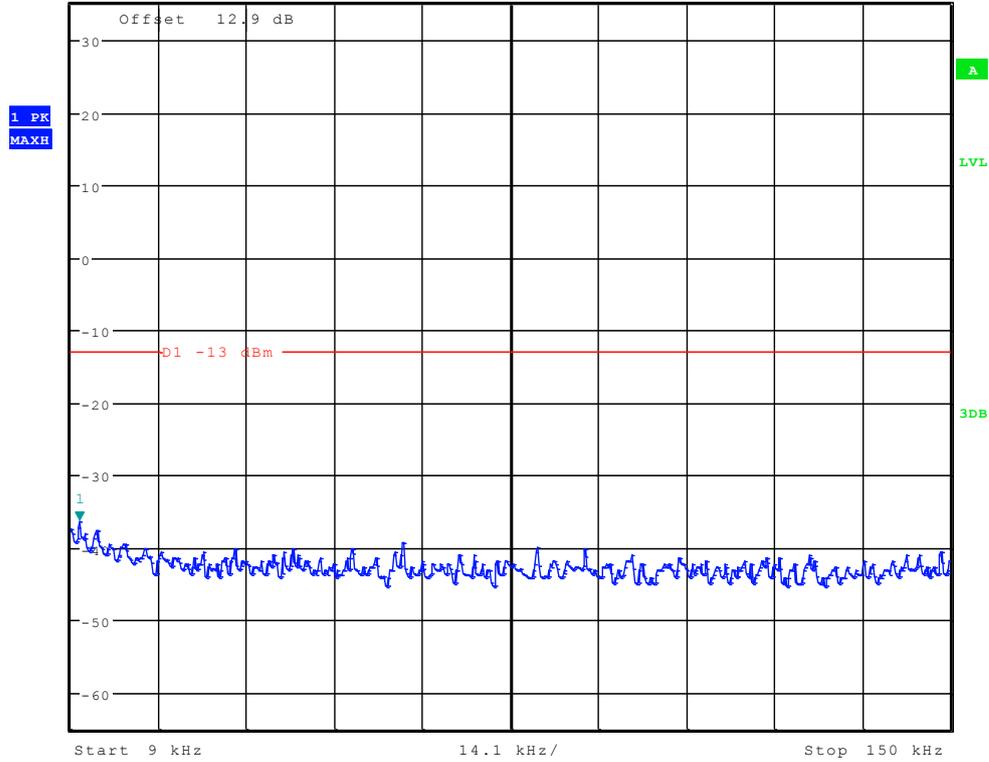

Date: 5.JUN.2012 15:17:28




*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -31.76 dBm
Ref 35 dBm Att 50 dB SWT 300 ms 150.00000000 kHz

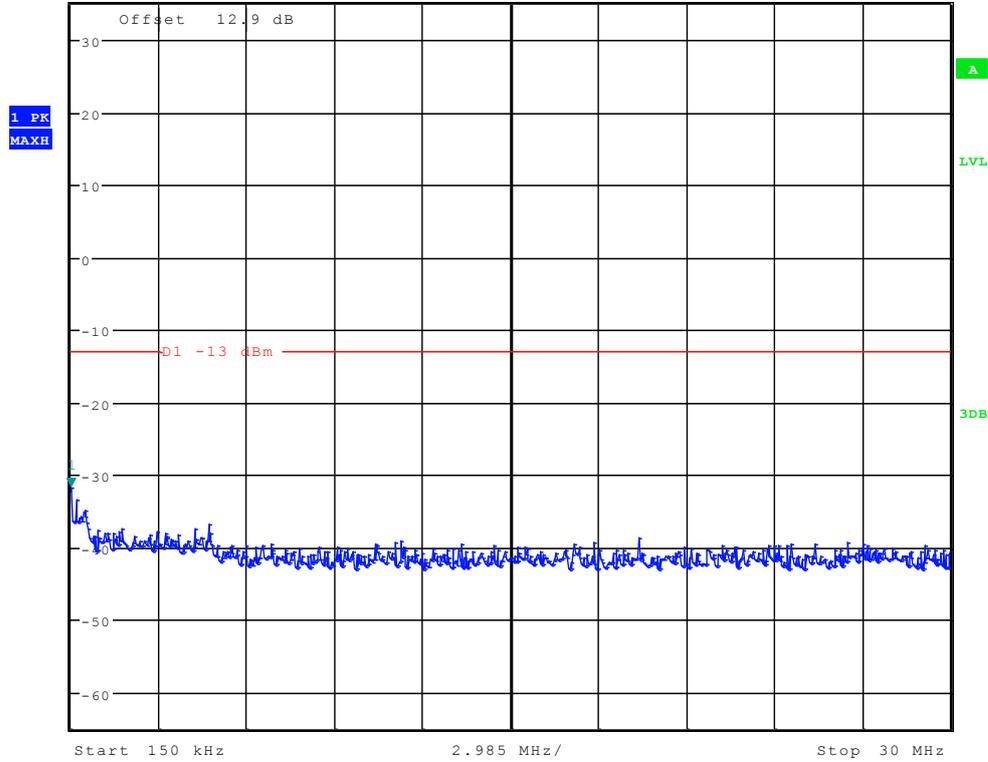

Date: 5.JUN.2012 15:18:12




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 32.84 dBm
Ref 35 dBm Att 50 dB SWT 100 ms 849.214743590 MHz

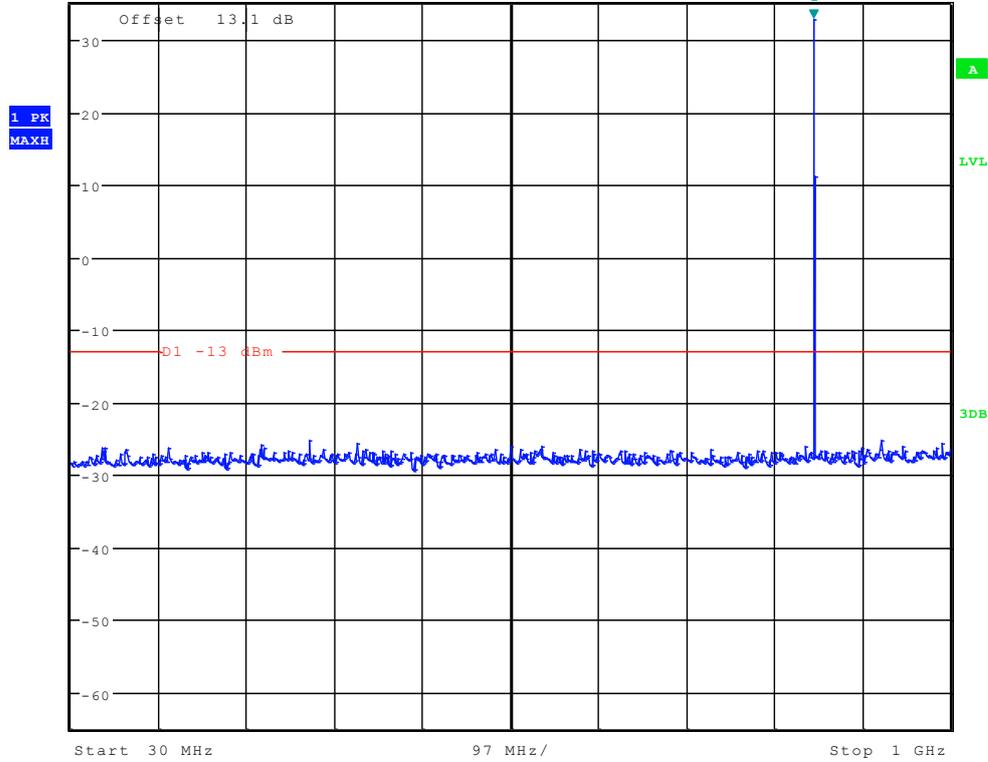

Date: 5.JUN.2012 15:18:55



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -14.15 dBm
SWT 70 ms 2.619391026 GHz

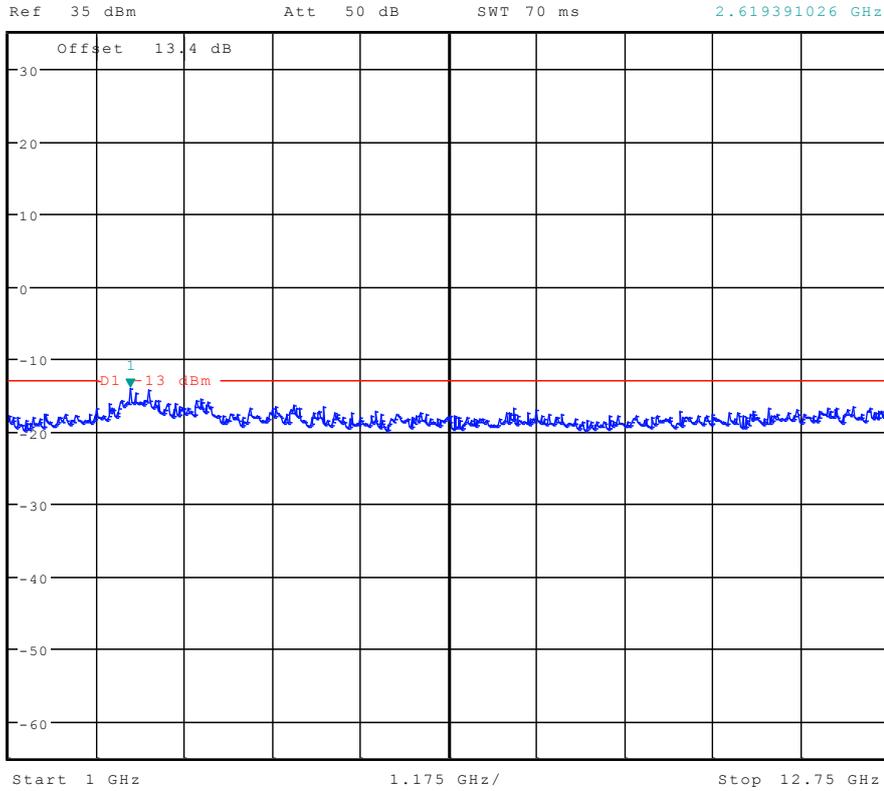

Date: 5.JUN.2012 15:19:39




TM2:EDGE

Channel 128




*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -36.19 dBm
SWT 145 ms 13.519230769 kHz

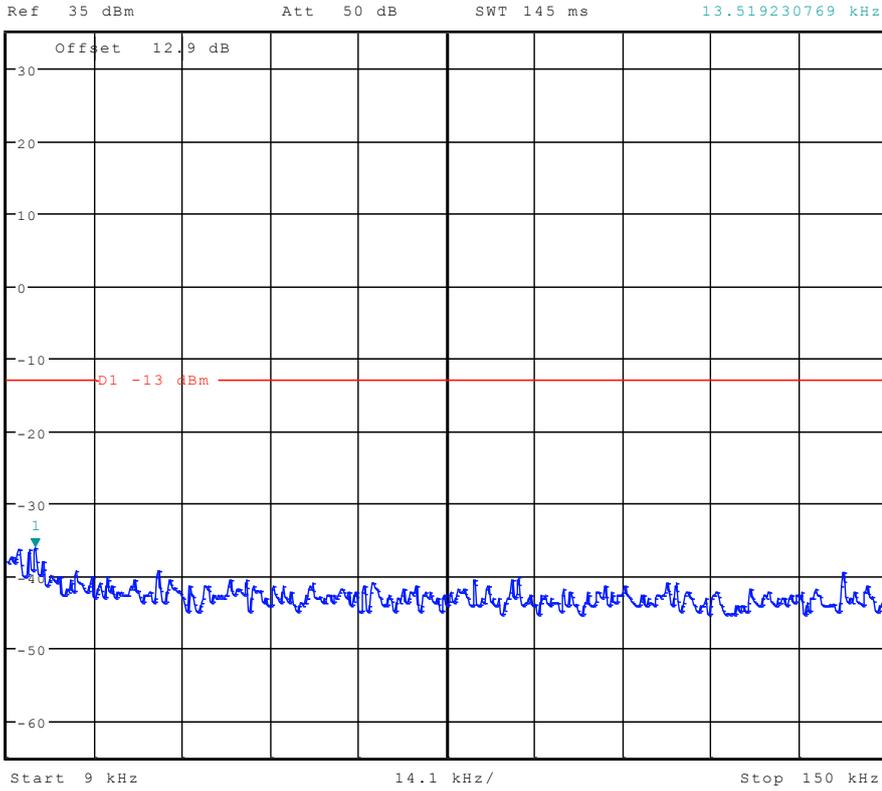

Date: 5.JUN.2012 15:22:33




*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -31.27 dBm
Ref 35 dBm Att 50 dB SWT 300 ms 197.836538462 kHz

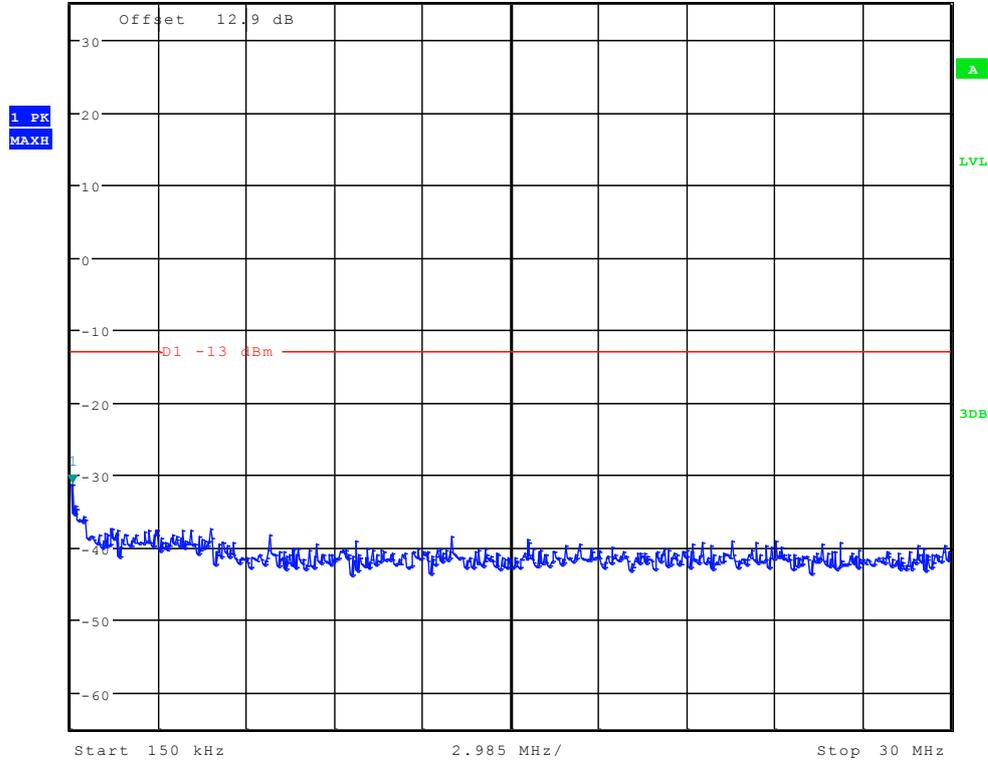

Date: 5.JUN.2012 15:23:17




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 26.98 dBm
Ref 35 dBm Att 50 dB SWT 100 ms 825.897435897 MHz

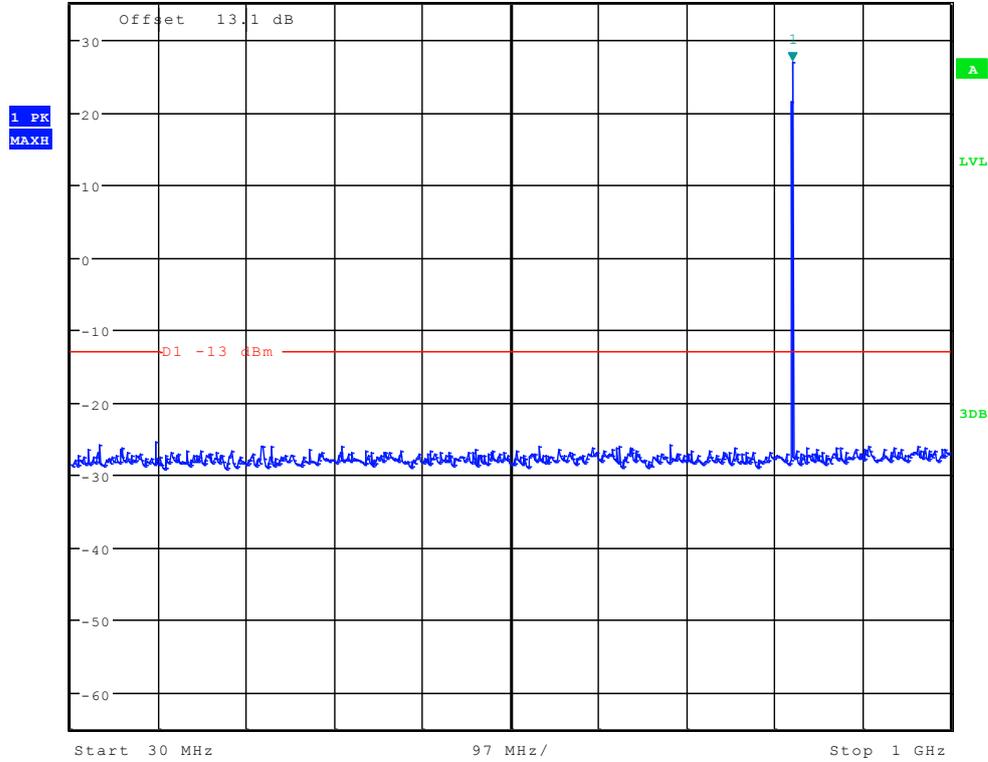

Date: 5.JUN.2012 15:24:01



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -13.34 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.713541667 GHz

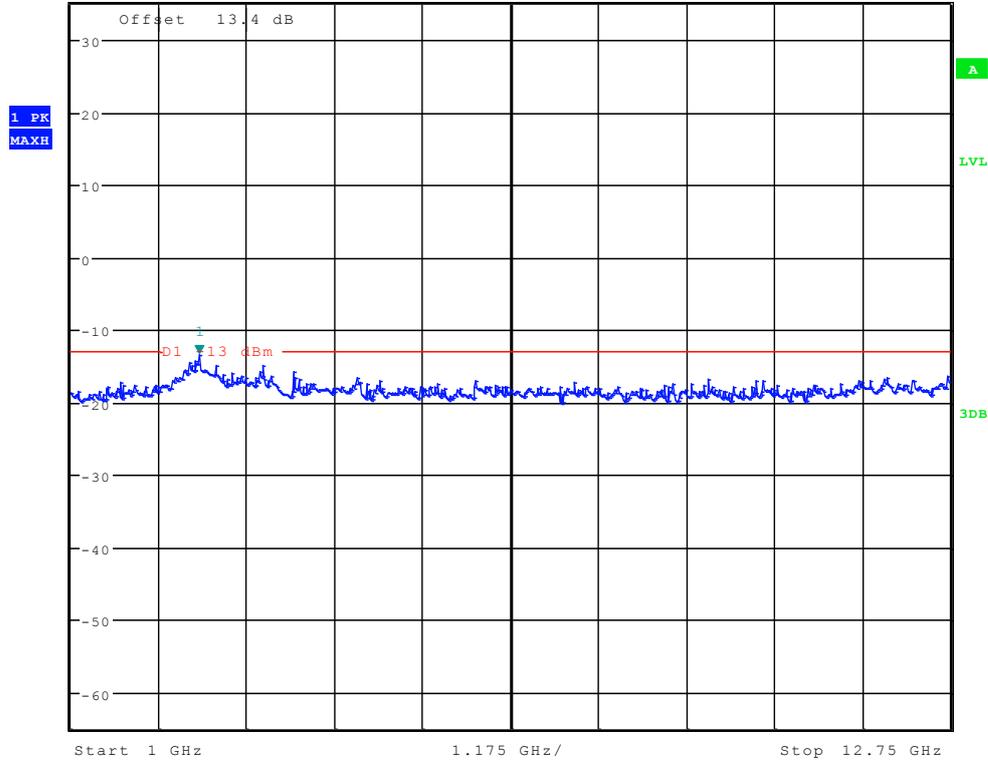

Date: 5.JUN.2012 15:24:45




Channel 192



* RBW 1 kHz Marker 1 [T1]
* VBW 10 kHz -37.08 dBm
SWT 145 ms 9.225961538 kHz

Ref 35 dBm Att 50 dB

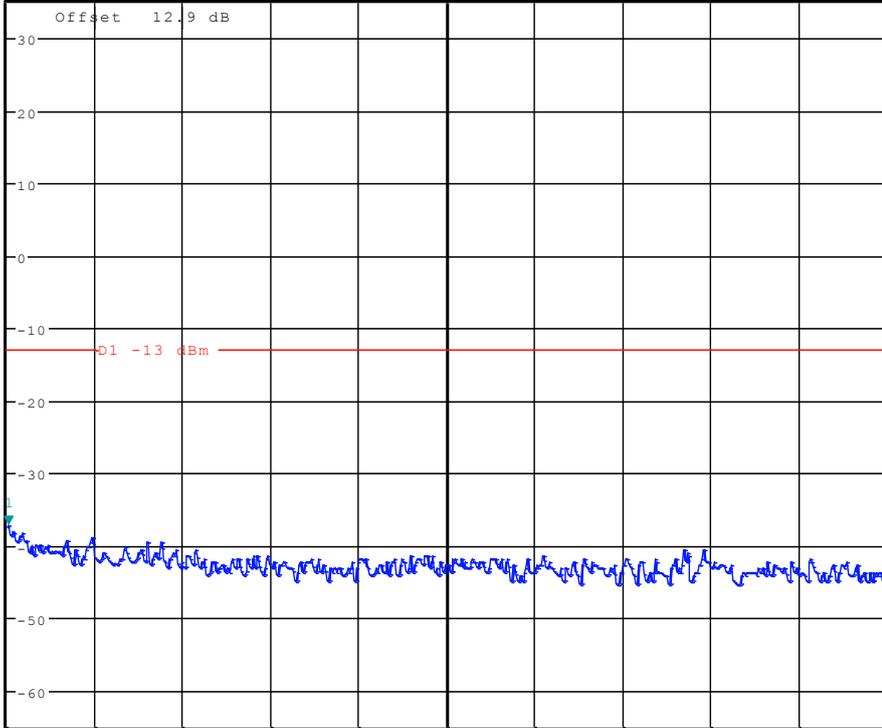


Start 9 kHz 14.1 kHz/ Stop 150 kHz

Date: 5.JUN.2012 15:22:48




*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -31.87 dBm
Ref 35 dBm Att 50 dB SWT 300 ms 150.00000000 kHz

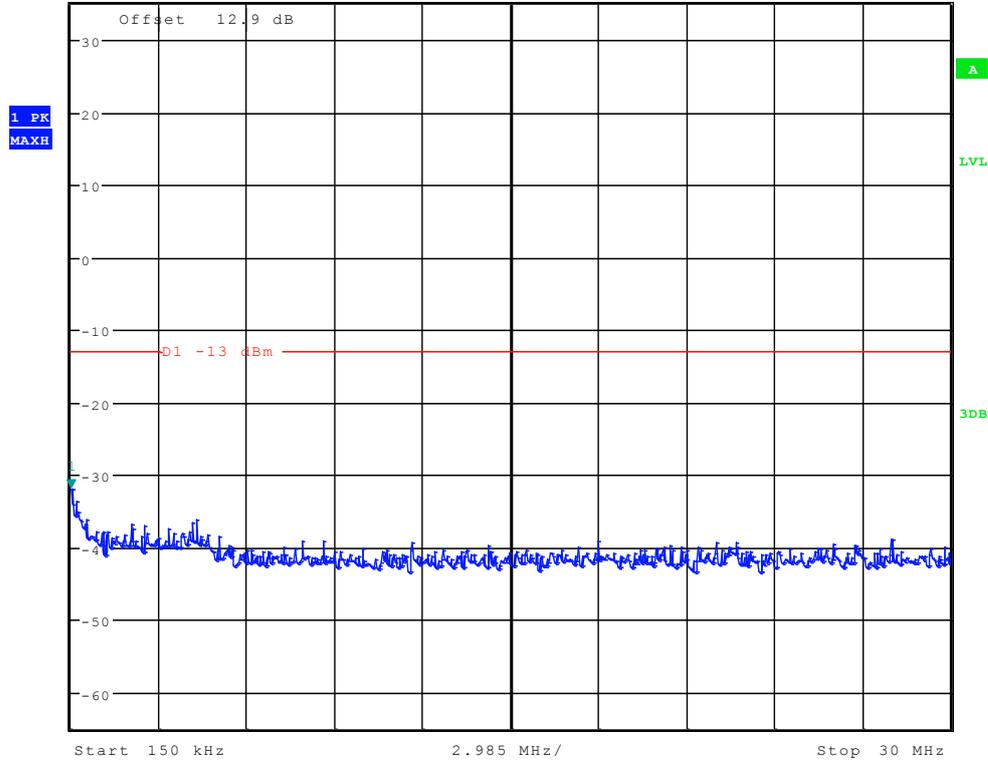

Date: 5.JUN.2012 15:23:31



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -14.42 dBm
SWT 70 ms 2.732371795 GHz

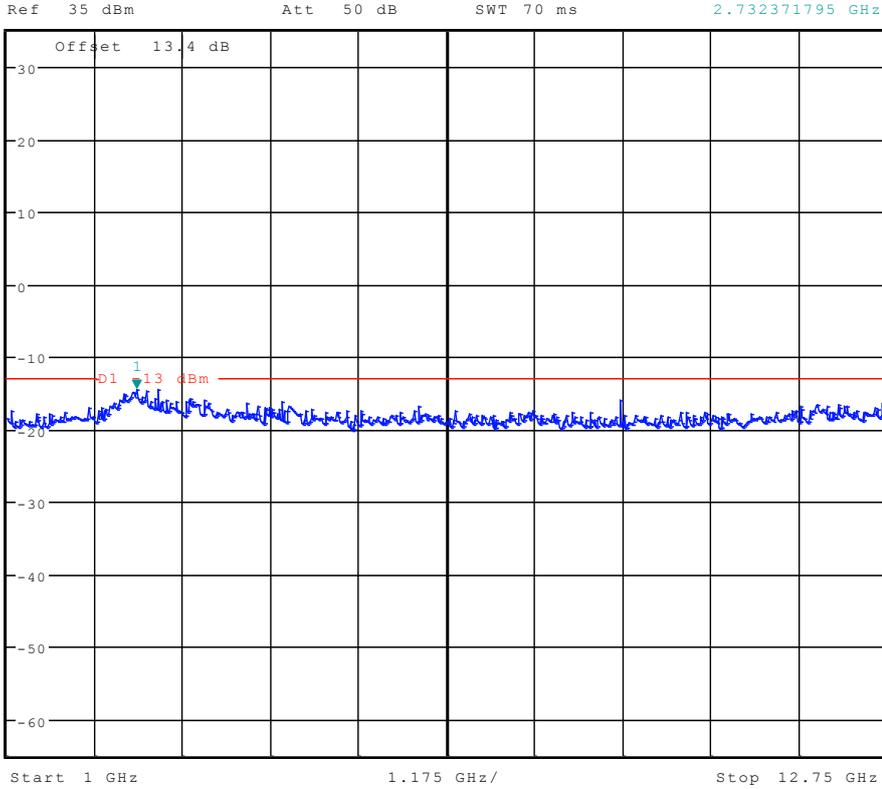


Date: 5.JUN.2012 15:24:59



Channel 251




Ref 35 dBm Att 50 dB RBW 1 kHz Marker 1 [T1] -36.87 dBm
VBW 10 kHz SWT 145 ms 12.615384615 kHz

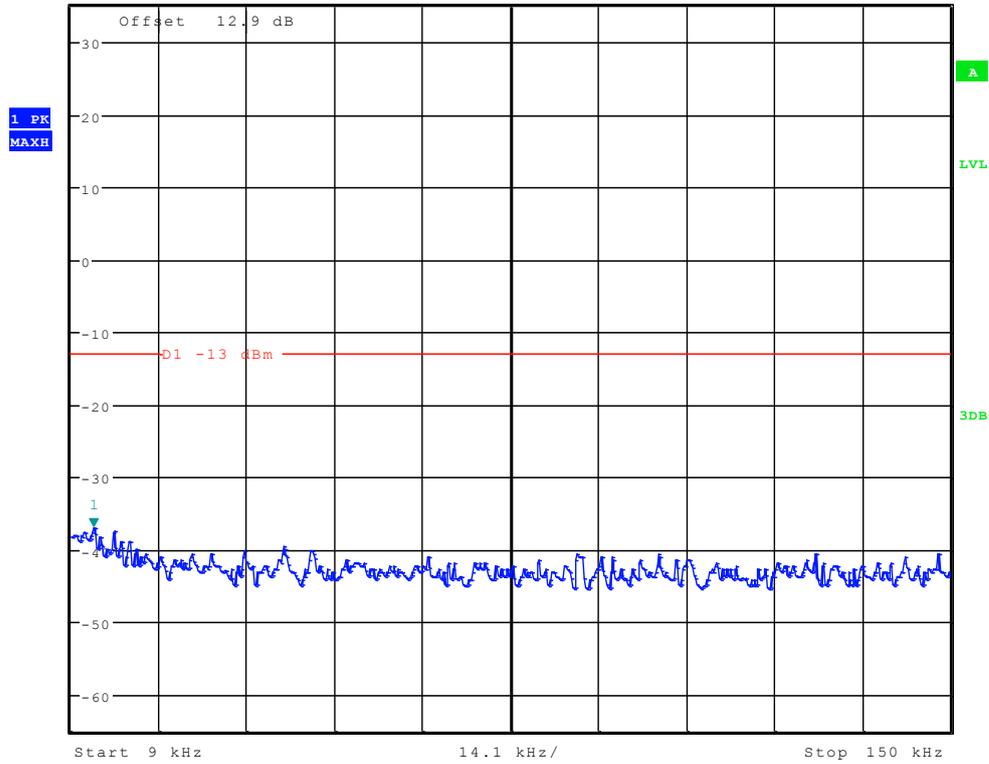

Date: 5.JUN.2012 15:23:02




*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -32.52 dBm
Ref 35 dBm Att 50 dB SWT 300 ms 150.00000000 kHz

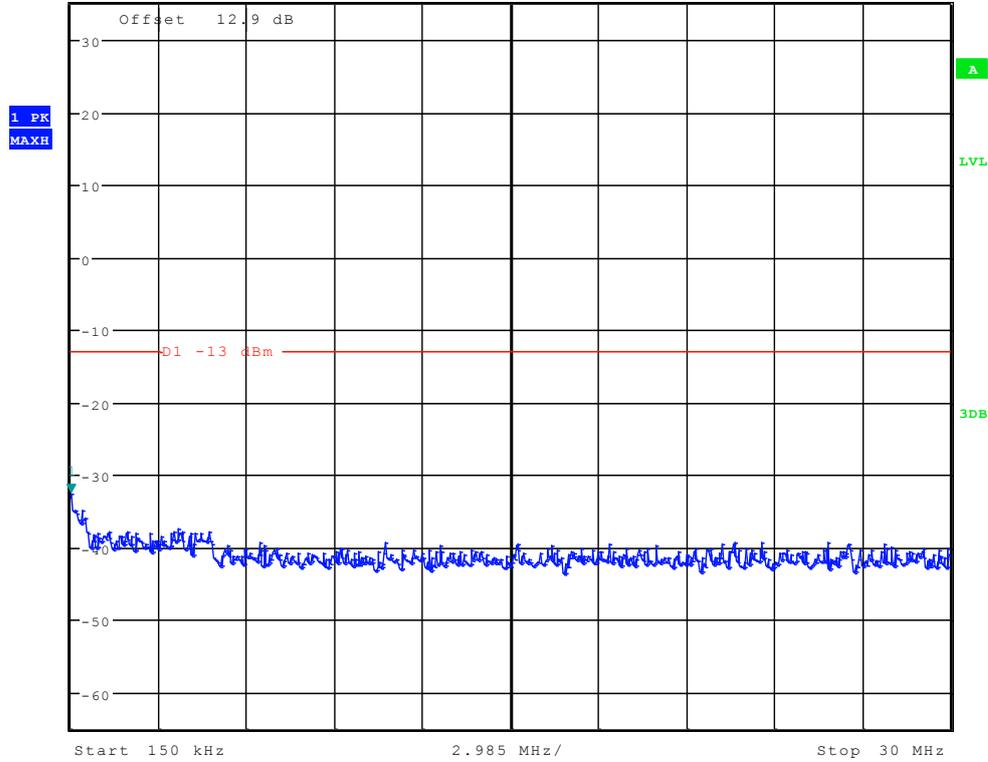

Date: 5.JUN.2012 15:23:46




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 31.94 dBm
Ref 35 dBm Att 50 dB SWT 100 ms 849.214743590 MHz

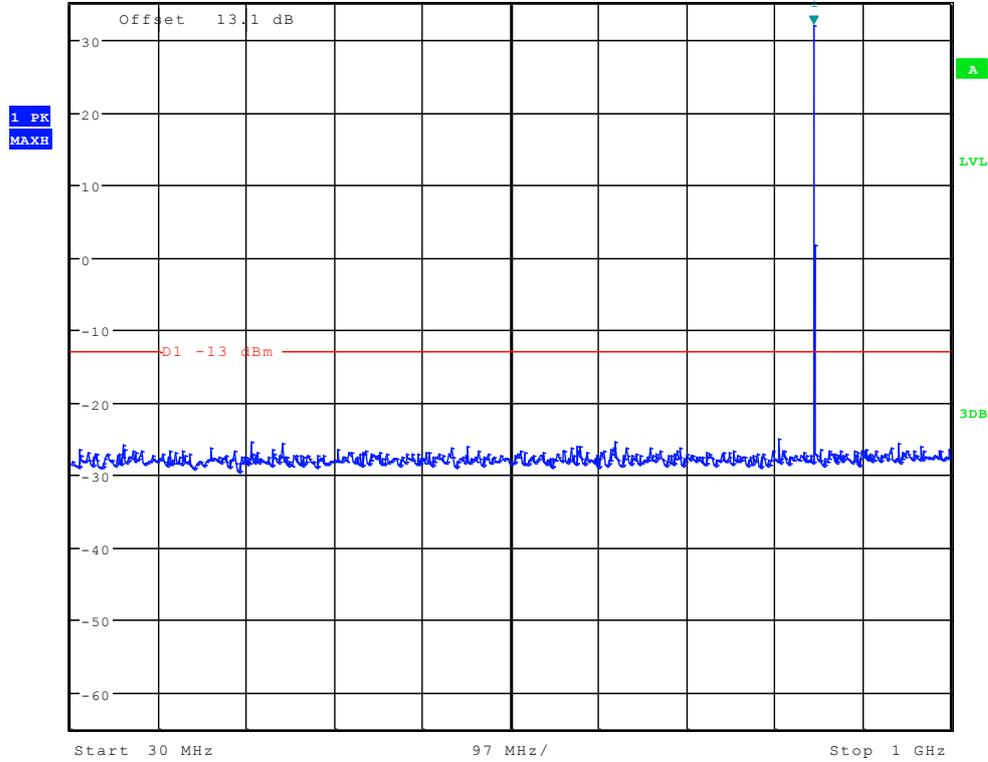

Date: 5.JUN.2012 15:24:29



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -14.44 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.675881410 GHz

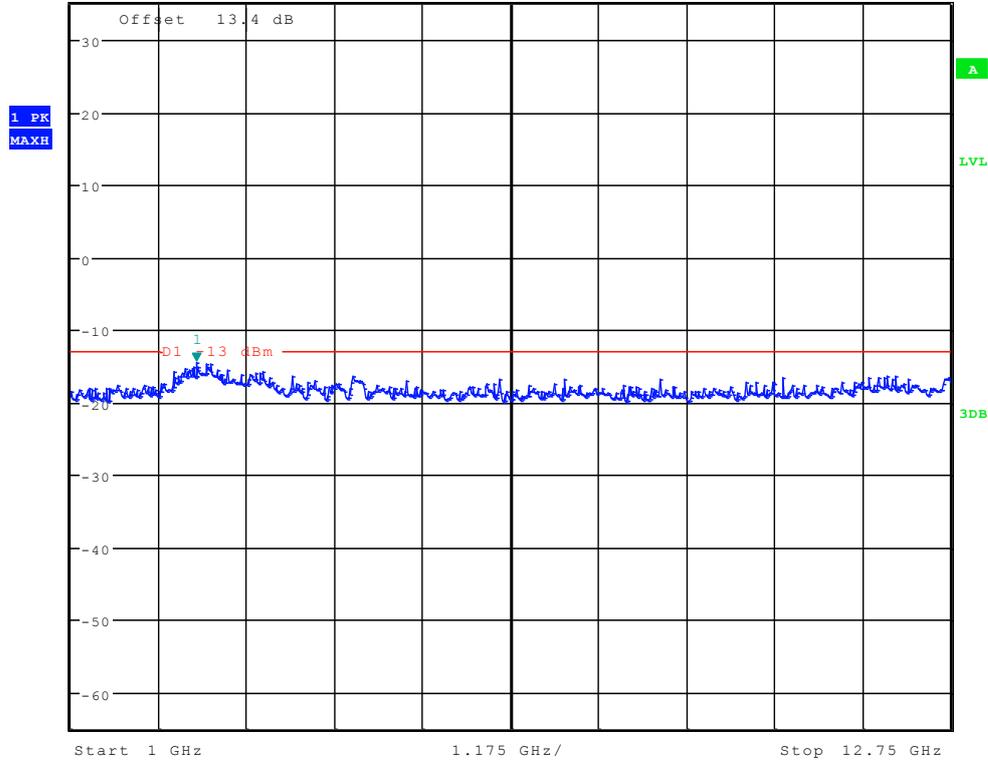

Date: 5.JUN.2012 15:25:13

-----The END-----




Appendix F


Radiated spurious emission

GSM 850


Traffic Mode (9kHz-30MHz)

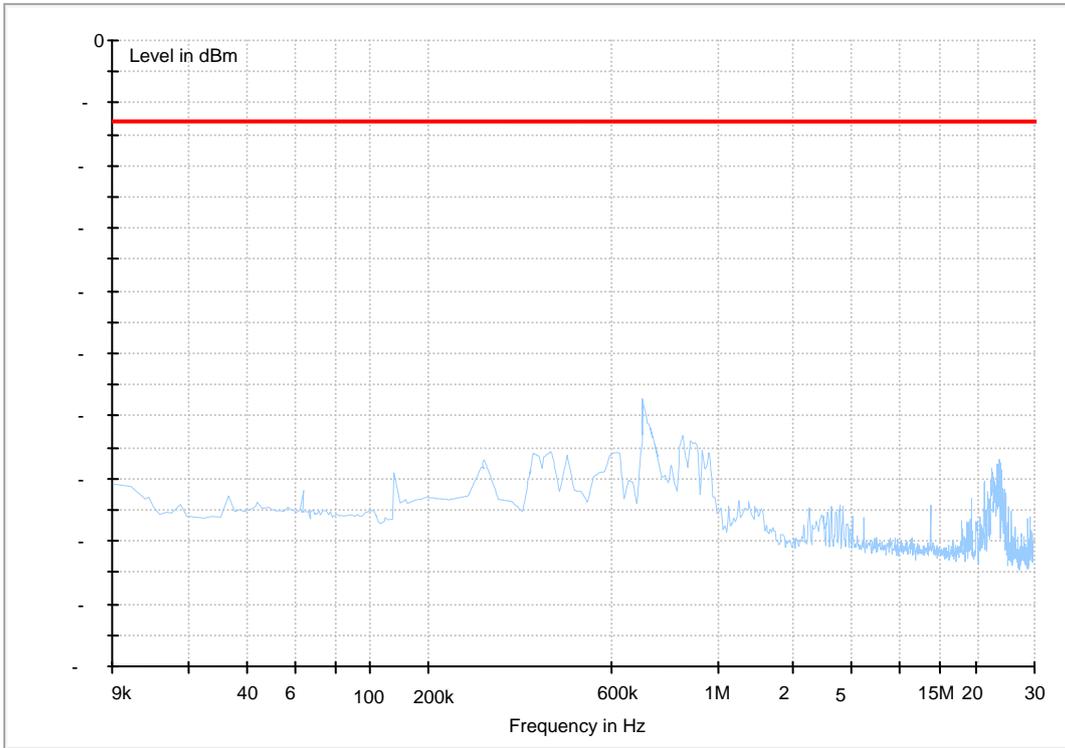

Traffic Mode (30MHz-3GHz)

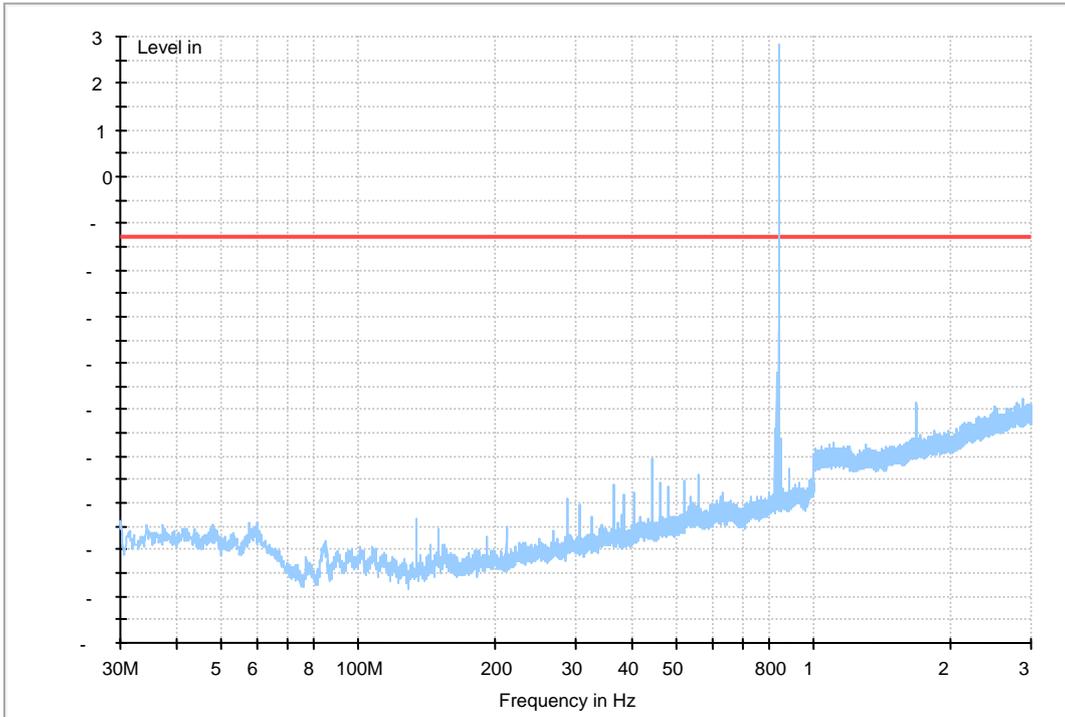


Traffic Mode (3GHz-18GHz)

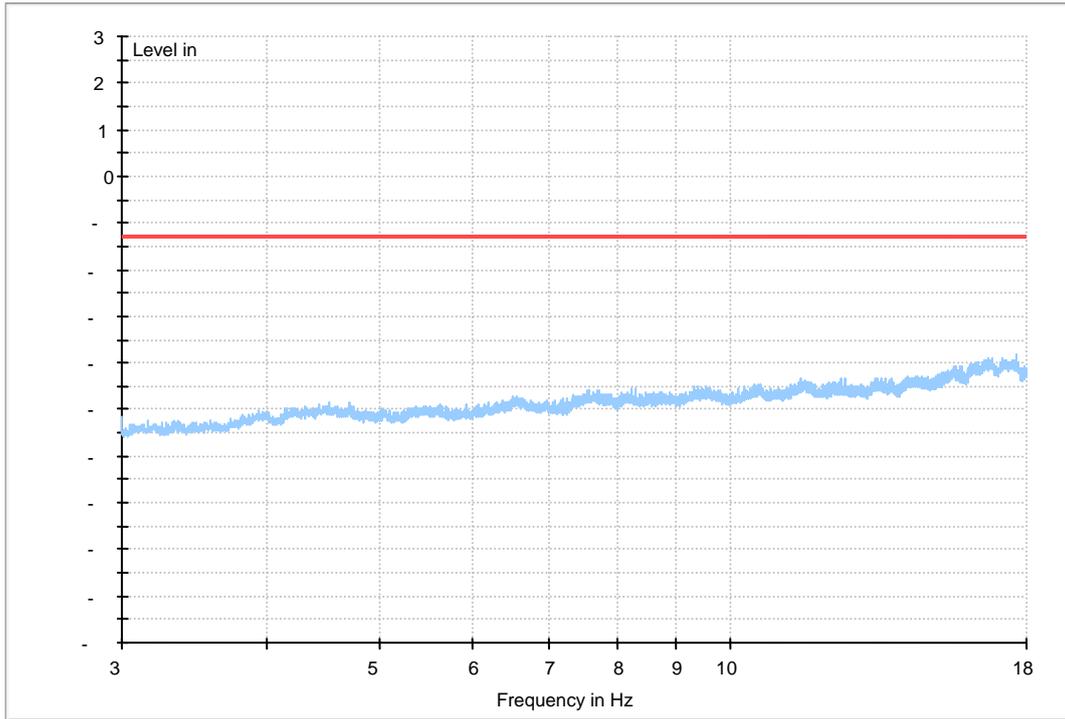


GPRS850


Traffic Mode (9kHz-30MHz)

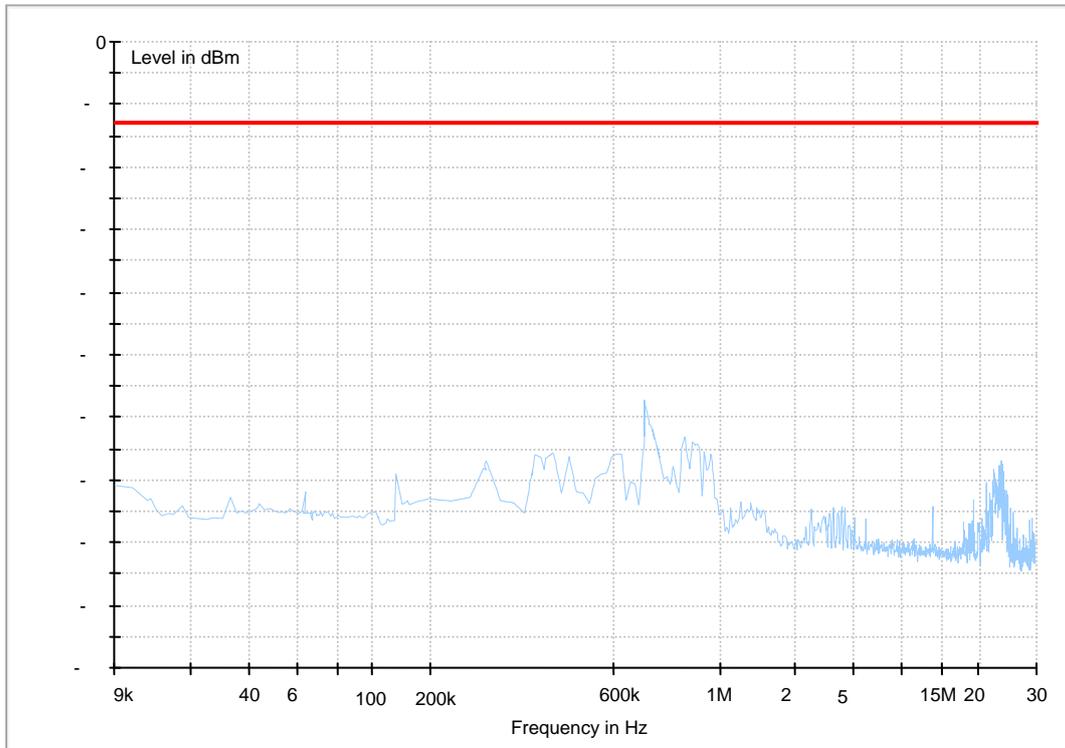

Traffic Mode (30MHz-3GHz)

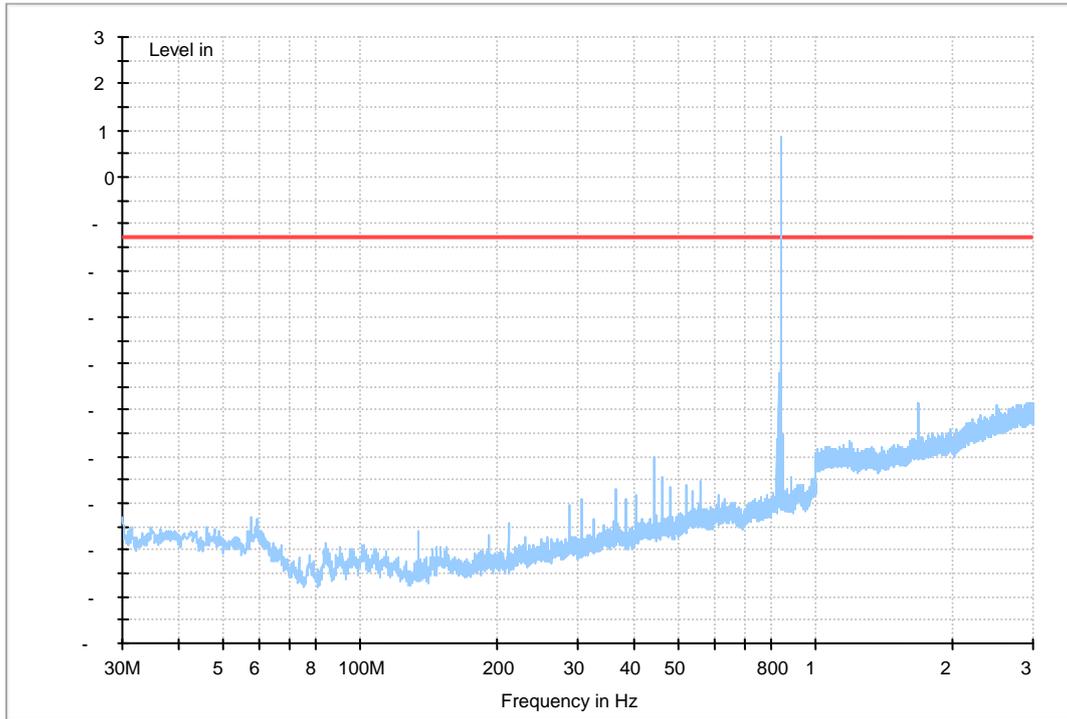


Traffic Mode (3GHz-18GHz)

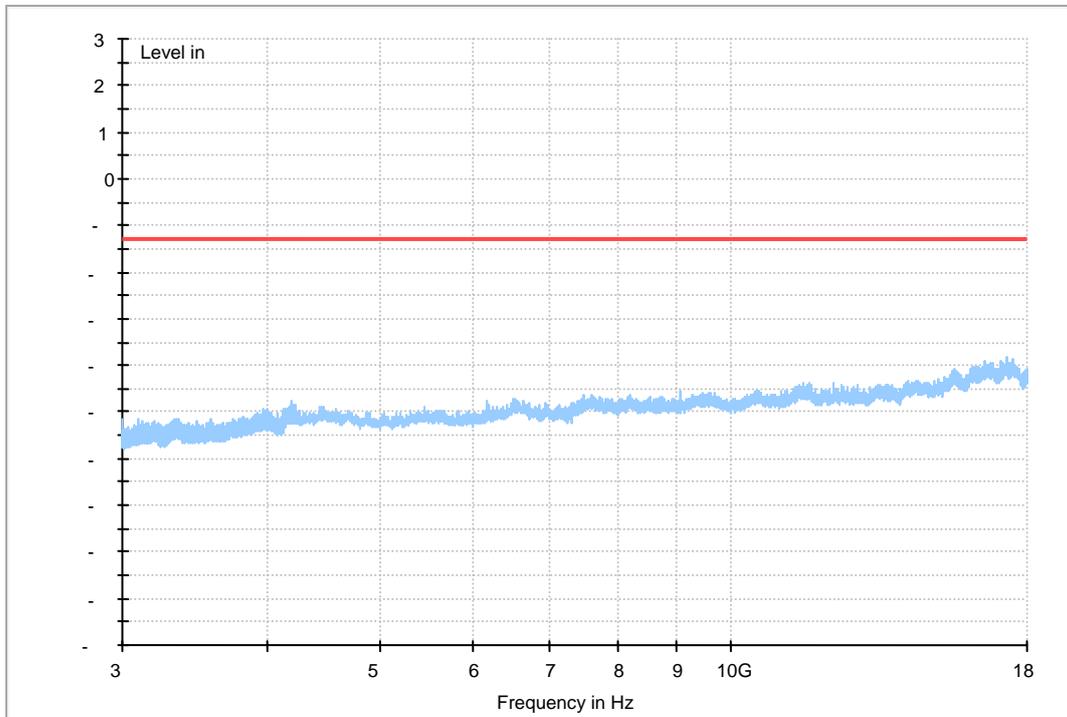


EDGE850


Traffic Mode (9kHz-30MHz)

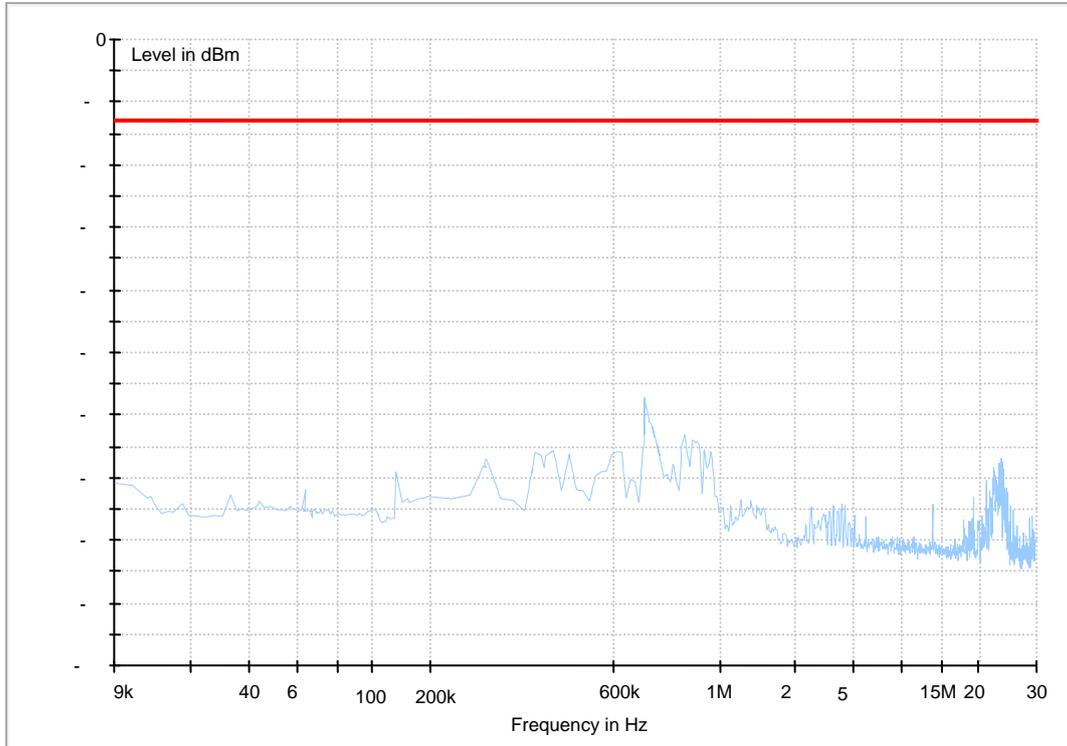

Traffic Mode (30MHz-3GHz)

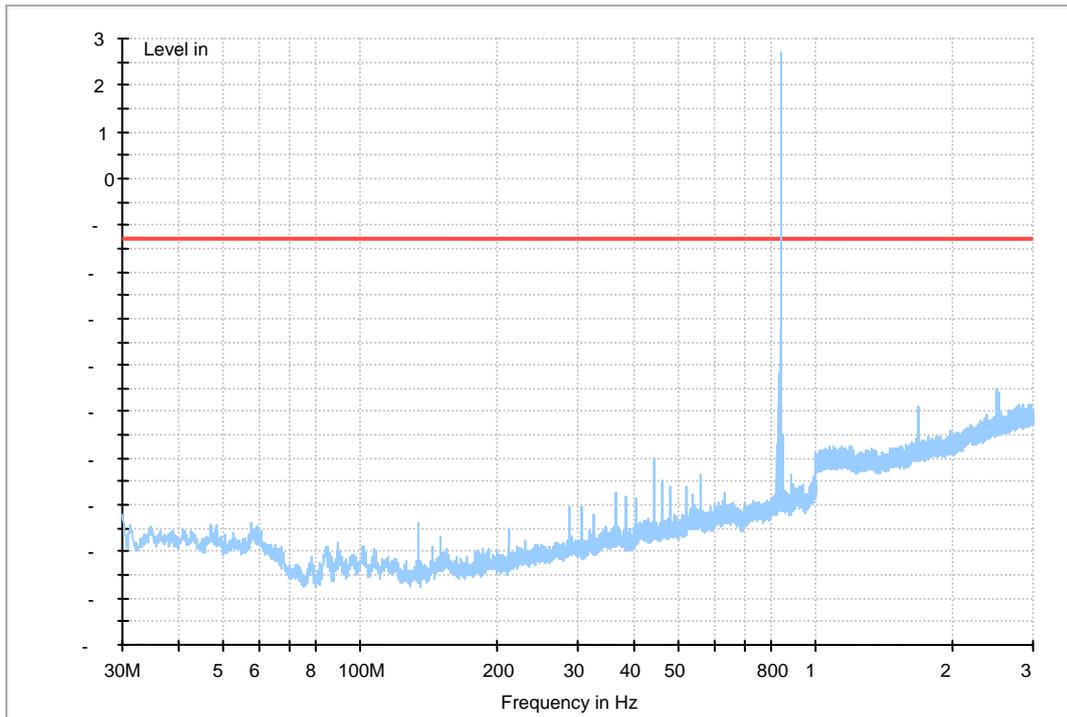

Traffic Mode (3GHz-18GHz)

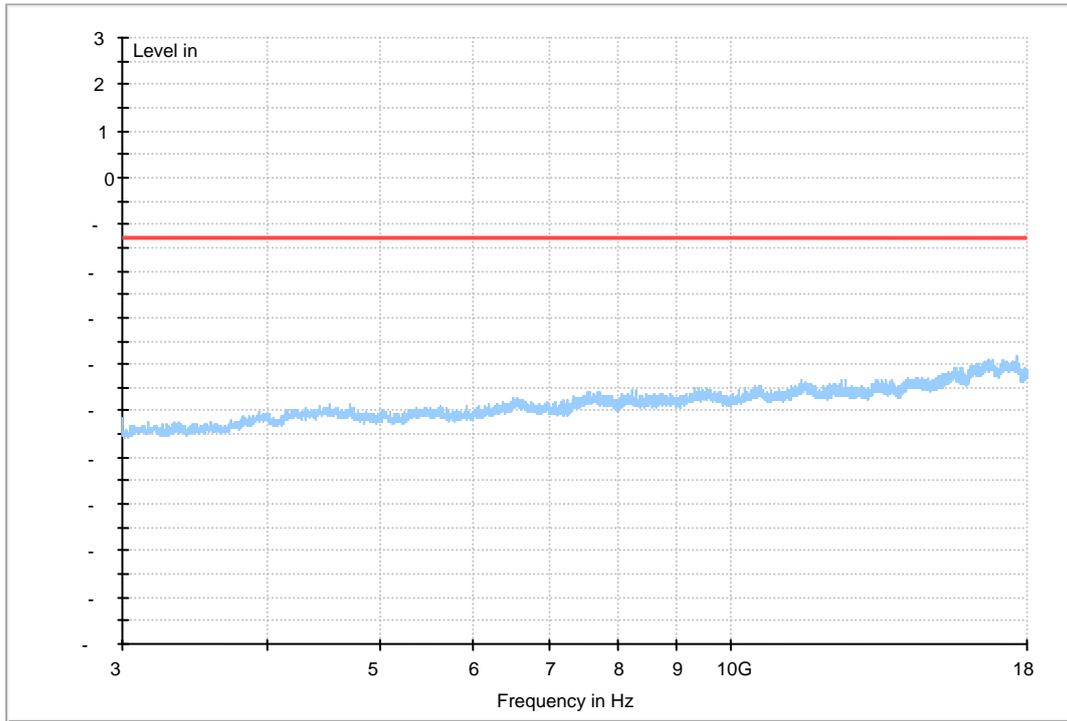

-----The END-----



Appendix G

Frequency Stability

According to FCC Part 2.1055 & Part 22.355



Frequency Error vs. Temperature:

Test Mode	RF Ch.	Volt.	Temp.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	VN	-30 °C	20	0.02389	---	±2.5	Pass
			-20 °C	-13	-0.01553	---	±2.5	Pass
			-10 °C	18	0.02151	---	±2.5	Pass
			0 °C	-14	-0.01673	---	±2.5	Pass
			10 °C	17	0.02031	---	±2.5	Pass
			20 °C	-11	-0.01314	---	±2.5	Pass
			30 °C	28	0.03345	---	±2.5	Pass
			40 °C	-16	-0.01912	---	±2.5	Pass
			50 °C	16	0.01912	---	±2.5	Pass
TM 2	M	VN	-30 °C	-9	-0.01075	---	±2.5	Pass
			-20 °C	23	0.02748	---	±2.5	Pass
			-10 °C	-10	-0.01195	---	±2.5	Pass
			0 °C	24	0.02867	---	±2.5	Pass
			10 °C	-15	-0.01792	---	±2.5	Pass
			20 °C	18	0.02151	---	±2.5	Pass
			30 °C	-13	-0.01553	---	±2.5	Pass
			40 °C	18	0.02151	---	±2.5	Pass
			50 °C	-11	-0.01314	---	±2.5	Pass



Frequency Error vs. Voltage:

Test Mode	RF Ch.	Temp.	Volt.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	TN	VL	-18	-0.02151	---	±2.5	Pass
			VN	14	0.01673	---	±2.5	Pass
			VH	-11	-0.01314	---	±2.5	Pass
TM 2	M	TN	VL	21	0.02509	---	±2.5	Pass
			VN	-12	-0.01434	---	±2.5	Pass
			VH	-17	-0.02031	---	±2.5	Pass

-----The END-----