



Appendix A. System Check Plots

Table of contents
SystemPerformanceCheck-D835-ES-Head
SystemPerformanceCheck-D835-ES-Body
SystemPerformanceCheck-D1900-ES-Head
SystemPerformanceCheck-D1900-ES-Body

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D835-ES-Head**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d126**

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.916$ mho/m; $\epsilon_r = 41.446$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.07, 6.07, 6.07); Calibrated: 9/27/2011;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/d=15mm,pin=250mW/Area Scan (6x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 2.43 mW/g


Configuration/d=15mm,pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 44.735 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 3.592 mW/g

SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.61 mW/g

Maximum value of SAR (measured) = 2.64 mW/g

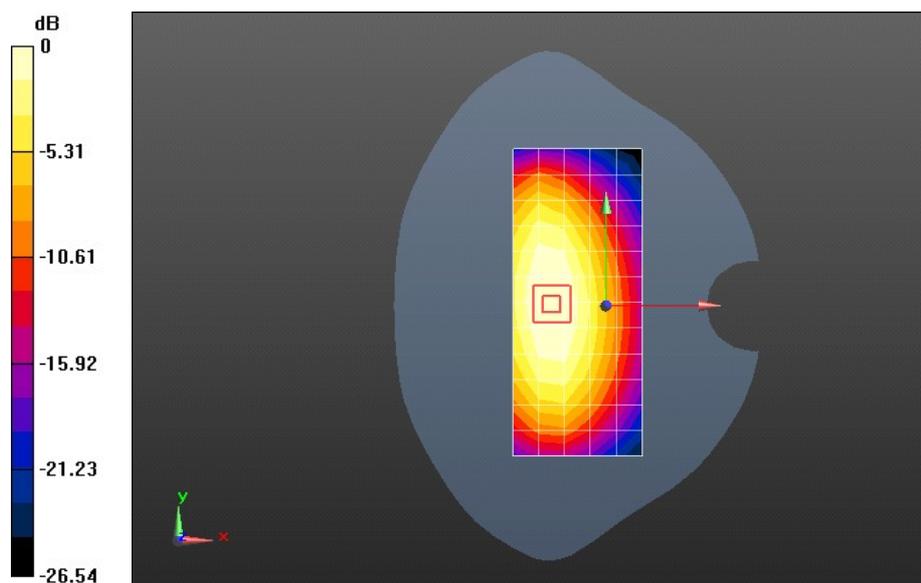

0 dB = 2.43 mW/g = 7.73 dB mW/g

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D835-ES-Body**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d126**

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 55.061$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.11, 6.11, 6.11); Calibrated: 9/27/2011;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/d=15mm,pin=250mW/Area Scan (6x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 2.59 mW/g


Configuration/d=15mm,pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 44.459 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 3.948 mW/g

SAR(1 g) = 2.59 mW/g; SAR(10 g) = 1.68 mW/g

Maximum value of SAR (measured) = 2.82 mW/g

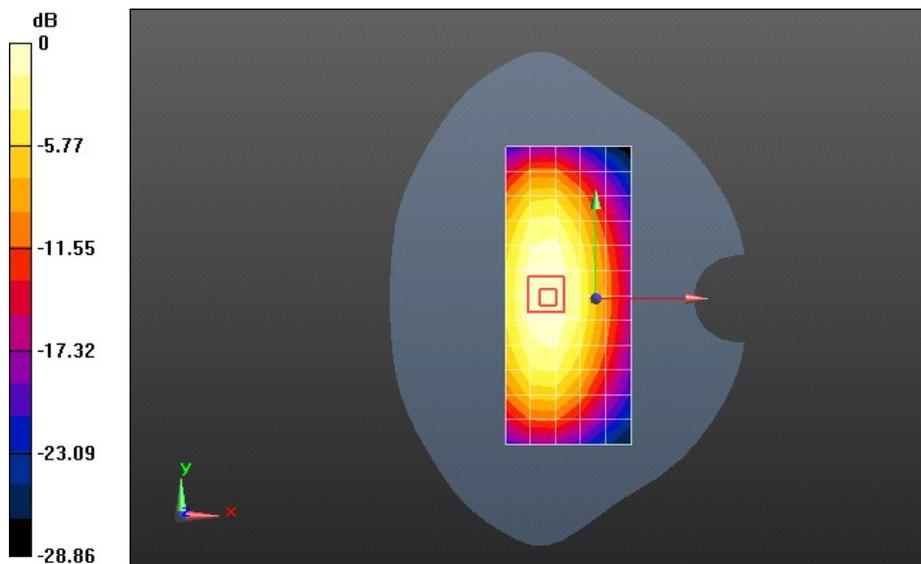

0 dB = 2.59 mW/g = 8.27 dB mW/g

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D1900-ES-Head

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d143

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.438$ mho/m; $\epsilon_r = 39.055$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.1, 5.1, 5.1); Calibrated: 9/27/2011;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 9.52 mW/g


Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 85.404 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 19.729 mW/g

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.32 mW/g

Maximum value of SAR (measured) = 11.6 mW/g

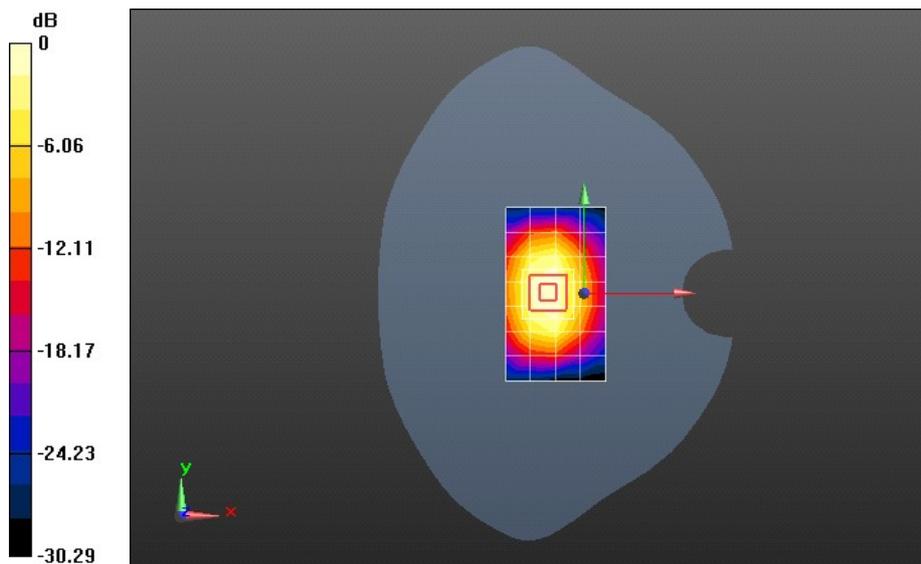

0 dB = 9.52 mW/g = 19.57 dB mW/g

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D1900-ES-Body**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d143**

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.579$ mho/m; $\epsilon_r = 52.561$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.61, 4.61, 4.61); Calibrated: 9/27/2011;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 3/28/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 10.6 mW/g


Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 87.063 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 19.978 mW/g

SAR(1 g) = 10.9 mW/g; SAR(10 g) = 5.63 mW/g

Maximum value of SAR (measured) = 12.3 mW/g

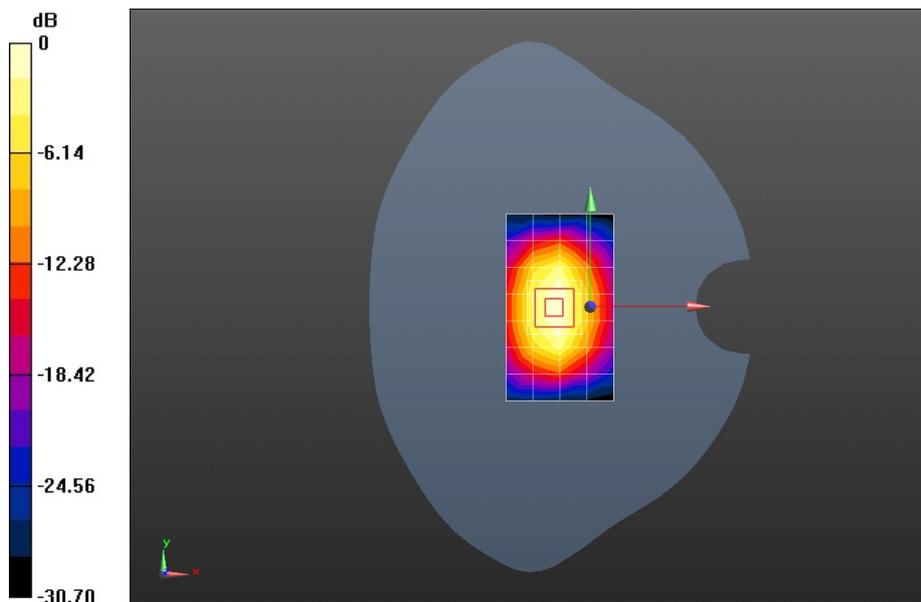

0 dB = 10.6 mW/g = 20.52 dB mW/g