



# FCC RF Test Report

**Product Name: HUAWEI Ascend Y 100;  
HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth**

**Model Number: HUAWEI U8185-1, U8185-1**

**Report No: SYBH(Z-RF)005032012-2001  
FCC ID: QISU8185-1**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

## Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



**Applicant:** Huawei Technologies Co., Ltd.  
**Address:** Huawei Base, Bantian, Longgang District, Shenzhen  
518129, P.R. China  
**Date of Receipt Test Item:** Feb.25, 2012  
**Start Date of Test:** Feb.26, 2012  
**End Date of Test:** Mar.03, 2012  
  
**Test Result:** Pass

Approved By Senior Engineer Mar.04, 2012 Dai Linjun Dai Linjun  
Date Name Signature

Reviewed By Mar.04, 2012 Cousy Xu Cousy XU  
Date Name Signature

Operator Mar.04, 2012 Huang Qiuliang Huang Qiuliang  
Date Name Signature

# Contents

<b>1</b>	<b><u>General Information</u></b> .....	<b>5</b>
1.1	APPLIED STANDARD .....	5
1.2	TEST LOCATION .....	5
1.3	TEST ENVIRONMENT CONDITION .....	5
<b>2</b>	<b><u>Summary</u></b> .....	<b>6</b>
<b>3</b>	<b><u>Product Description</u></b> .....	<b>7</b>
3.1	PRODUCTION INFORMATION .....	7
<b>4</b>	<b><u>Test Description</u></b> .....	<b>9</b>
4.1	SUPPORTED FREQUENCY RANGE.....	9
4.2	TRANSMITTER / RECEIVER CHARACTERISTICS .....	9
4.3	ANTENNA GAIN.....	9
4.4	POWER SUPPLY .....	9
<b>5</b>	<b><u>General Test Conditions / Configurations</u></b> .....	<b>10</b>
5.1	RF CHANNELS UNDER TEST.....	10
5.2	TEST MODES .....	10
5.3	TEST ENVIRONMENTS.....	10
5.4	TEST SETUPS.....	11
5.5	TEST CONDITIONS .....	13
<b>6</b>	<b><u>Main Test Instruments</u></b> .....	<b>15</b>
<b>7</b>	<b><u>Test Results</u></b> .....	<b>16</b>
<b>8</b>	<b><u>Measurement Uncertainty</u></b> .....	<b>16</b>



# 1 General Information

## 1.1 Applied Standard

Applied Rules: 47 CFR FCC Part 2:2010, Subpart J  
47 CFR FCC Part 22:2010, Subpart H  
ANSI/TIA 603C:2004

## 1.2 Test Location

Test Location 1: Reliability Laboratory of Huawei Technologies Co., Ltd.  
Address: Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R.  
China

## 1.3 Test Environment Condition

Ambient Temperature: 20 – 25 °C  
Ambient Relative Humidity: 45 – 55 %  
Atmospheric Pressure: 101 kPa

## 2 Summary

Table 1 Summary of results

Test Case	FCC Part No.	Requirements	Result
Cellular Band			
Transmitter Output Power	2.1046 & 22.913	ERP not exceed 7 W Peak-to-average ratio not exceed 13 dB	Pass
Modulation Characteristics	2.1047	Digital modulation	Pass
Occupied Bandwidth	2.1049	(Not specified)	Pass
Band Edges Compliance	2.1051 & 917	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 2.917	Below -13 dBm/1 kHz, 9 kHz to 150 kHz Below -13 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 10 <sup>th</sup> harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 22.917	Below -13 dBm/100 kHz	Pass
Frequency Stability	2.1055 & 22.355	Maintained within the tolerances of $\pm 2.5$ ppm	Pass

### 3 Product Description

#### 3.1 Production Information

##### 3.1.1 General Description

HUAWEI U8185-1, U8185-1 is subscriber equipment in the WCDMA/GSM system. The HSDPA/UMTS frequency band is Band I and Band VIII, neither of bands test data included in this report. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only GSM850 test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSDPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

##### 1.3.1 Board Information

Table 2 Board Information

HUAWEI Ascend Y 100; HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth		
HUAWEI U8185-1, U8185-1		
Board and Module		
Serial Number	Software Version	Hardware Version
L8X01A9211800011	U8185-1V100R001C00B805	HD1U8185M

##### 1.3.2 Adapter Technical Data

AC/DCAdapter Model	HS-050040U6
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  400mA
Rated Power	5W

AC/DCAdapter Model	HW-050055E1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  550mA
Rated Power	5W

AC/DCAdapter Model	HW-050055B1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  550mA
Rated Power	5W



AC/DCAdapter Model	HS-050040A6
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  400mA
Rated Power	5W

### 3.1.2 Battery Technical Data

Name	Manufacture	Description
Rechargeable Li-ion	Huawei Technologies Co., Ltd.	Battery Model: HB4J1 Rated capacity: 1050mAh Nominal Voltage:  +3.7V Charging Voltage:  +4.2V

## 4 Test Description

### 4.1 Supported Frequency Range

Characteristics	Description
Downlink	869 to 894 MHz;
Uplink	824 to 849 MHz

### 4.2 Transmitter / Receiver Characteristics

Characteristics	Description
System Type	GSM
TX Output Power (per Antenna Port)	GSM system: 33dBm;
Channel Spacing(s) / Bandwidth(s)	GSM system: 200 kHz
Designation of Emissions	GSM system: 246KGXW (GMSK modulation), 247KG7W (8PSK modulation)

### 4.3 Antenna Gain

Antenna Gain(dBi)	-2.0
Antenna Gain(dBd)	-4.15

### 4.4 Power Supply

Specification	Description
Power Supply Type	Directly Connected to DC /AC Power Supply
Input to EUT (DC power)	DC Voltage Nominal: $\approx$ 3.7 V DC Voltage Range: $\approx$ 3.6 V to 4.2 V
Input to EUT (AC power)	AC Voltage Nominal: ~ 230 V (50/60 Hz) AC Voltage Range: ~100-240V

## 5 General Test Conditions / Configurations

### 5.1 RF Channels under Test

Test Mode	TX / RX	RF Channel		
		Bottom (B)	Middle (M)	Top (T)
TM1/TM2	TX	Channel 128	Channel 192	Channel 251
		824.2MHz	837.0MHz	848.8MHz
	RX	Channel 128	Channel 192	Channel 251
		869.2MHz	882.0MHz	893.8MHz

### 5.2 Test Modes

Test Mode	Test Modes Description
TM1	GSM/GPRS, GMSK modulation
TM2	EDGE, 8PSK modulation

### 5.3 Test Environments

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.6V
	VN	3.7V
	VH	4.2V


NOTE: VL= lower extreme test voltages  
 VN= nominal voltage  
 VH= upper extreme test voltage  
 TN= normal temperature

## 5.4 Test Setups


### 5.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Ports	Until otherwise declared, all TX tests are ONLY performed at the main Transmitter antenna port (e.g. TRXA, TXA and so on) of the EUT, and all RX tests are ONLY performed at the main Receiver antenna port (e.g. TRXA, RXA and so on) of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

### 5.4.2 Test Setup 1

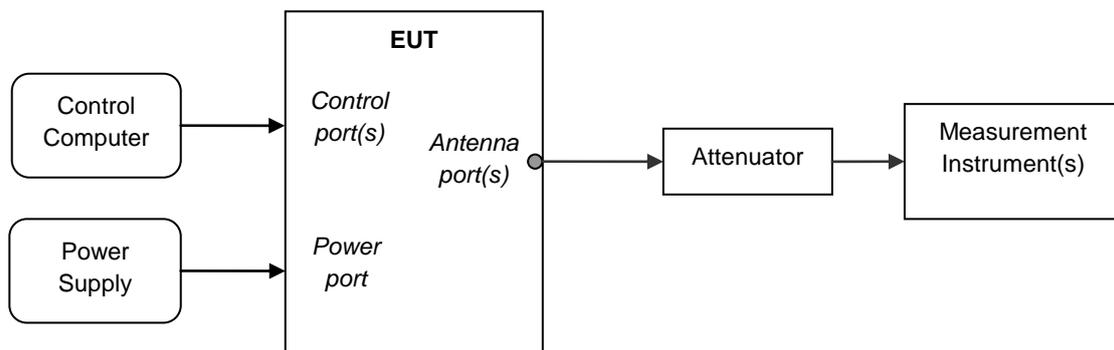


### 5.4.3 Test Setup 2

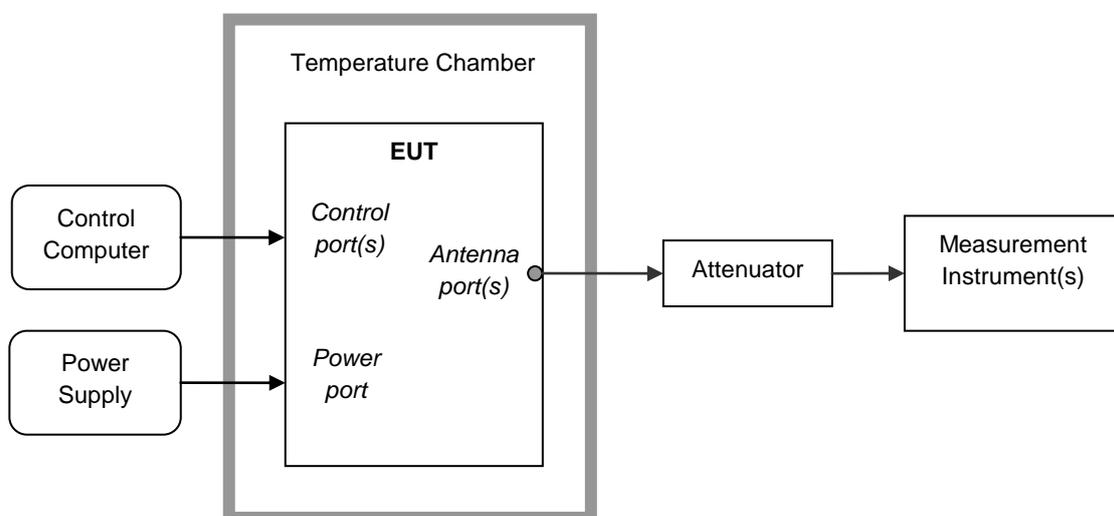


### 5.4.4 Test Setup 3

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

#### Step 1: Pre-test

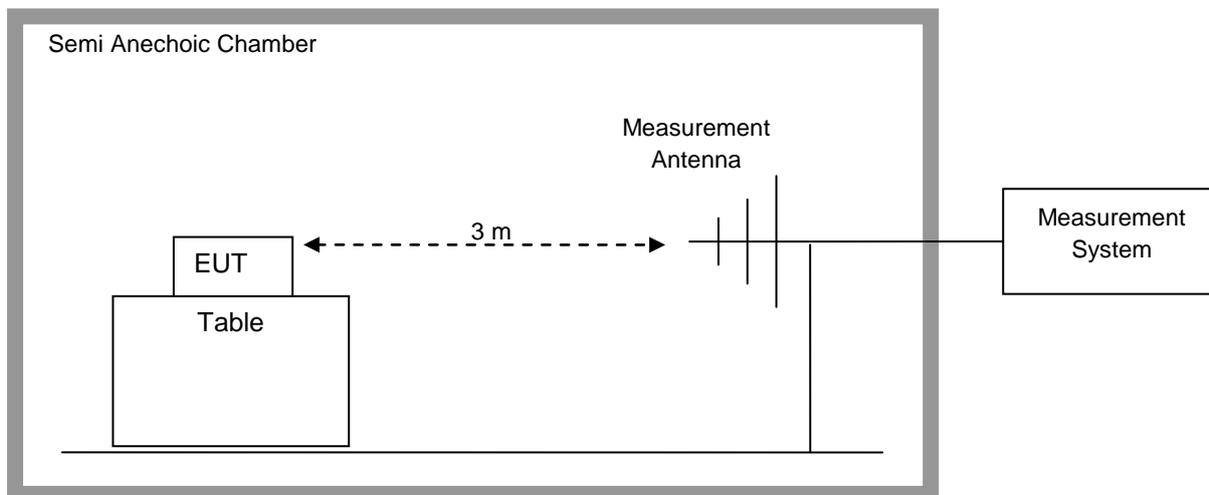

#### Step 2: Substitution method to verify the maximum ERP

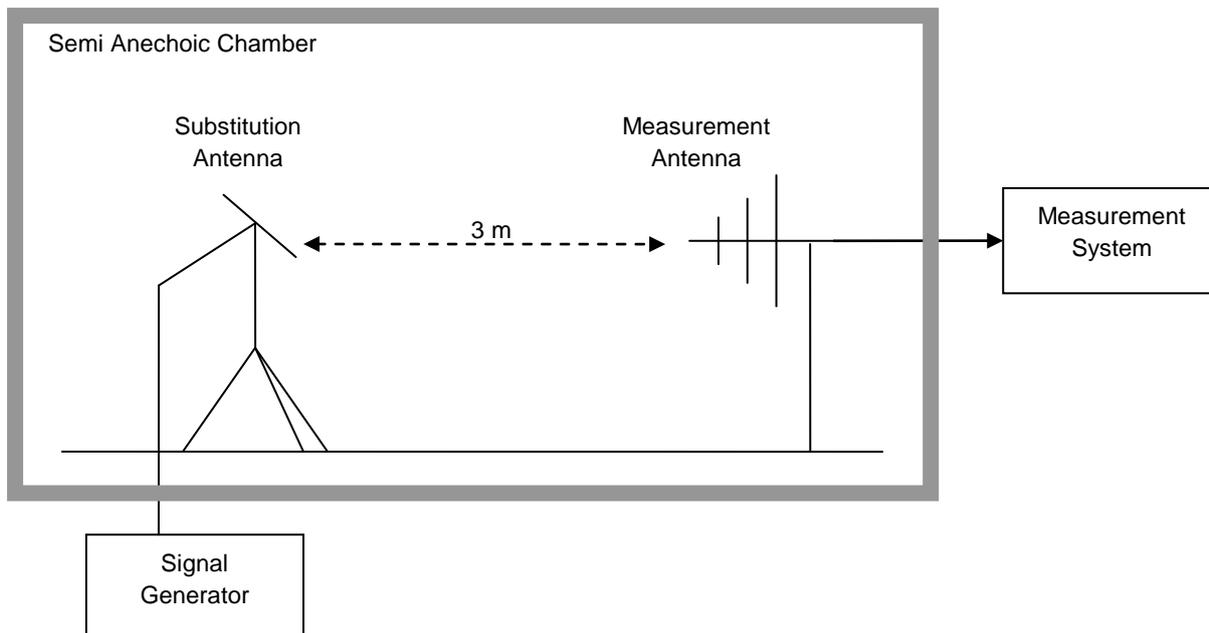

## 5.5 Test Conditions

Test Case	Test Conditions	
Transmitter Output Power	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1 & Test Setup 3
	Detector	RMS
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Modulation Characteristics	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	RF Channels (TX)	M
	Test Mode	TM1/TM2
Occupied Bandwidth	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Band Edges Compliance	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	B, T
	Test Mode	TM1/TM2
Spurious Emission at Antenna Terminals	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Field Strength of Spurious Radiation	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	PK
	RF Channels (TX)	M
	Test Mode	TM1/TM2/
Frequency Stability	Test Configuration	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) 85%, 100% and 115% of Rated Voltage at Ambient Temperature.
	Test Setup	Test Setup 2



---

---

Test Case	Test Conditions	
	RF Channels (TX)	M
	Test Mode	TM1/TM2

## 6 Main Test Instruments

Table 3 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sep.27,2012
Universal Radio Communication Tester	R&S	CMU200	117341	Jan.12.2013
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug.31,2012
Spectrum Analyzer	Agilent	E4440A	MY49420179	Apr.20,2012
Signal Analyzer	R&S	FSQ31	200021	Sep.27,2012
Temperature Chamber	WEISS	WKL64	24600294	Jan.03,2013
Signal generator	Agilent	E8257D	MY49281095	Jul.09.2012
Test receiver	R&S	ESU26	100150	May.29.2012
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	919/1009	Jan.29.2013
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	Jan.29.2013
Horn Antenna	R & S	HF906	100683	May.15, 2012
Horn Antenna	R & S	HF906	100684	Jul.01, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-357	May.15, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-356	May.15, 2012

## 7 Test Results

No.	Test Item	Test Result
1	Transmitter Output Power	Appendix A
2	Modulation Characteristics	Appendix B
3	Occupied Bandwidth	Appendix C
4	Band Edges Compliance	Appendix D
5	Spurious Emission at Antenna Terminals	Appendix E
6	Field Strength of Spurious Radiation	Appendix F
7	Frequency Stability	Appendix G
8	Photos of Field Strength of Spurious Radiation	Appendix H

NOTE: The Appendix H only photos of Field Strength of Spurious Radiation, no test data.

## 8 Measurement Uncertainty

For a 95% confidence level (k=2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmitter Output Power	Power (dBm)	U =0.39 dB
Occupied Bandwidth	Magnitude (%)	U=0.2%
Band Edge Compliance	Disturbance Power (dBm)	U=2.0 dB
Conducted Spurious Emissions	Disturbance Power (dBm)	U=2.0 dB
Field Strength of Spurious Radiation	ERP (dBm)	U=4.6 dB (30 MHz – 1GHz) U=3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy (ppm)	U=0.21 ppm

-----The END-----



# Appendix A

## Transmitter Output Power According to FCC Part 2.1046 & Part22.913



## Conducted Power of Transmitter

TEST CONDITIONS	RF Output Power (Conducted)					
	Channel128(B)		Channel192(M)		Channel251(T)	
	824.2MHz		837.0MHz		848.8MHz	
	dBm		dBm		dBm	
$T_{nom} / V_{nom}$	Measured	Limit	Measured	Limit	Measured	Limit
TM1	32.64	38.5	32.63	38.5	32.61	38.5
TM2	26.99	38.5	27.00	38.5	26.97	38.5



## Effective Radiated Power of Transmitter (ERP)

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	FCC limit [dBm]	Result
TM1	824.2	28.49	Dipole Ant.	31.82	-2.75	0.6	28.47	38.5	Pass
TM1	837.0	28.48	Dipole Ant.	31.92	-2.87	0.6	28.45	38.5	Pass
TM1	848.8	28.46	Dipole Ant.	31.87	-2.85	0.6	28.42	38.5	Pass
TM2	824.2	22.84	Dipole Ant.	26.16	-2.75	0.6	22.81	38.5	Pass
TM2	837.0	22.85	Dipole Ant.	26.27	-2.87	0.6	22.80	38.5	Pass
TM2	848.8	22.82	Dipole Ant.	26.32	-2.85	0.6	22.87	38.5	Pass

Note: a, For getting the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

b, SGP=Signal Generator Level

The END




## **Appendix B**

# Modulation Characteristics

According to FCC Part 2.1047 & Part22 Subpart H




## Channel 192 (TM1:GPRS/GSM)

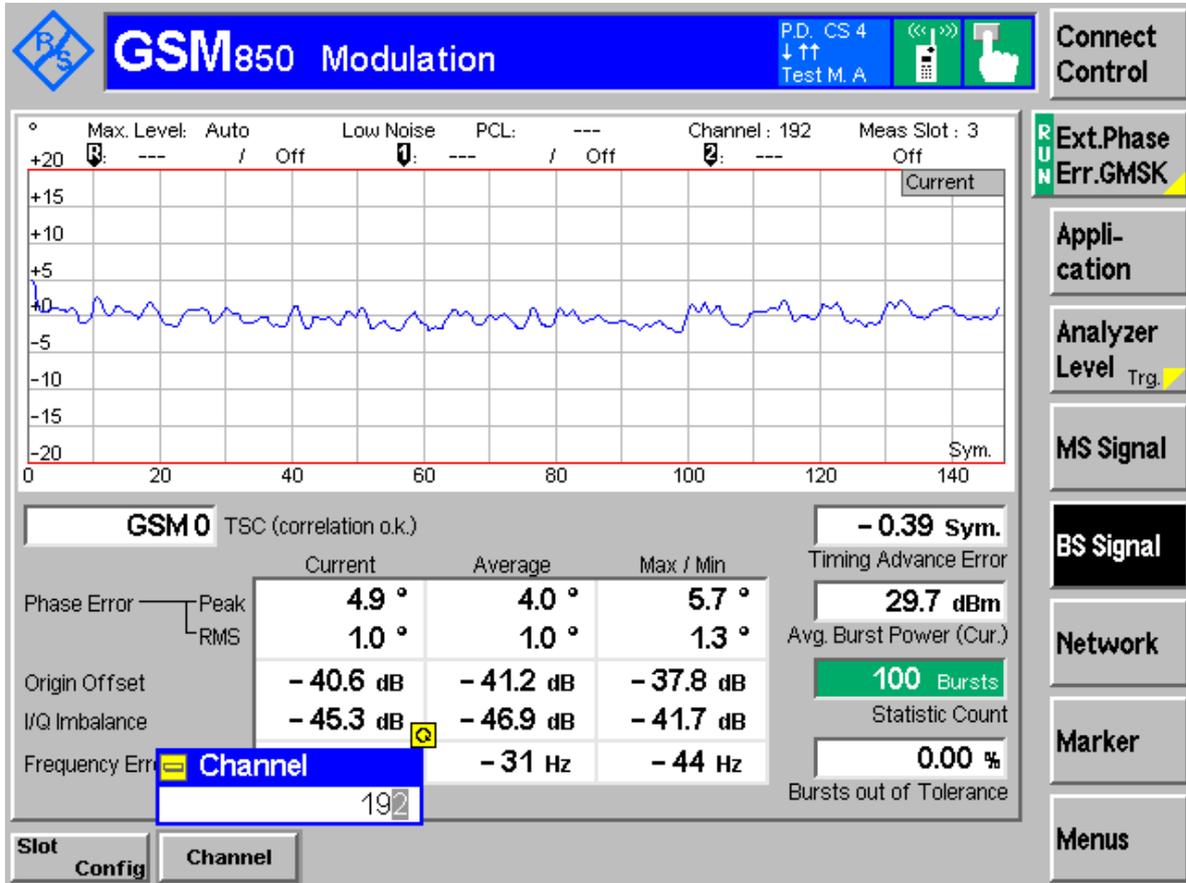



## Channel 192 (TM2:EDGE)

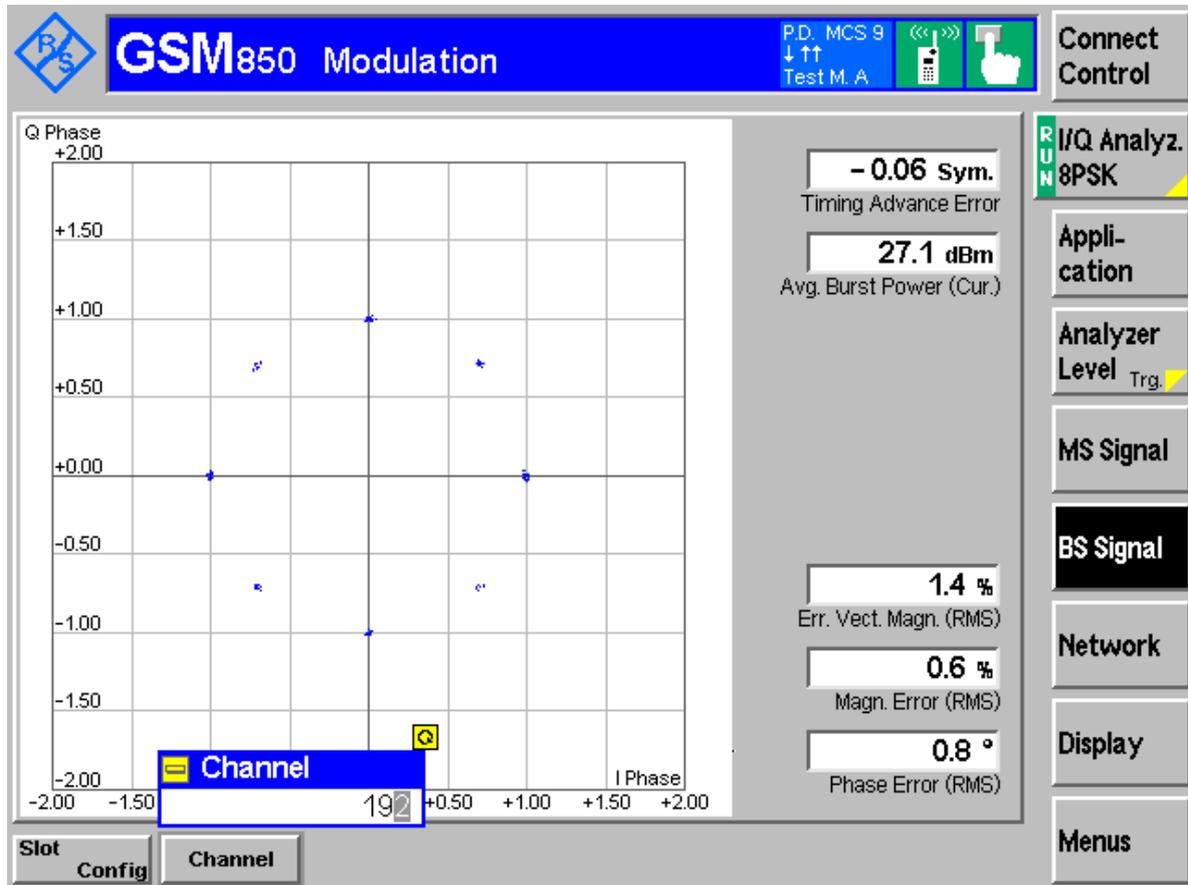

The END



## Appendix C

# Occupied Bandwidth

According to FCC Part 2.1049 & Part 22 Subpart H



Result Table

Table 1 Measurement Results

Test Mode	RF Channel	Occupied Bandwidth [kHz]	Verdict
TM1	128	246.8	Pass
	192	242.0	Pass
	251	242.0	Pass
TM2	128	245.2	Pass
	192	243.6	Pass
	251	243.6	Pass










## Channel 192 (TM2:EDGE)

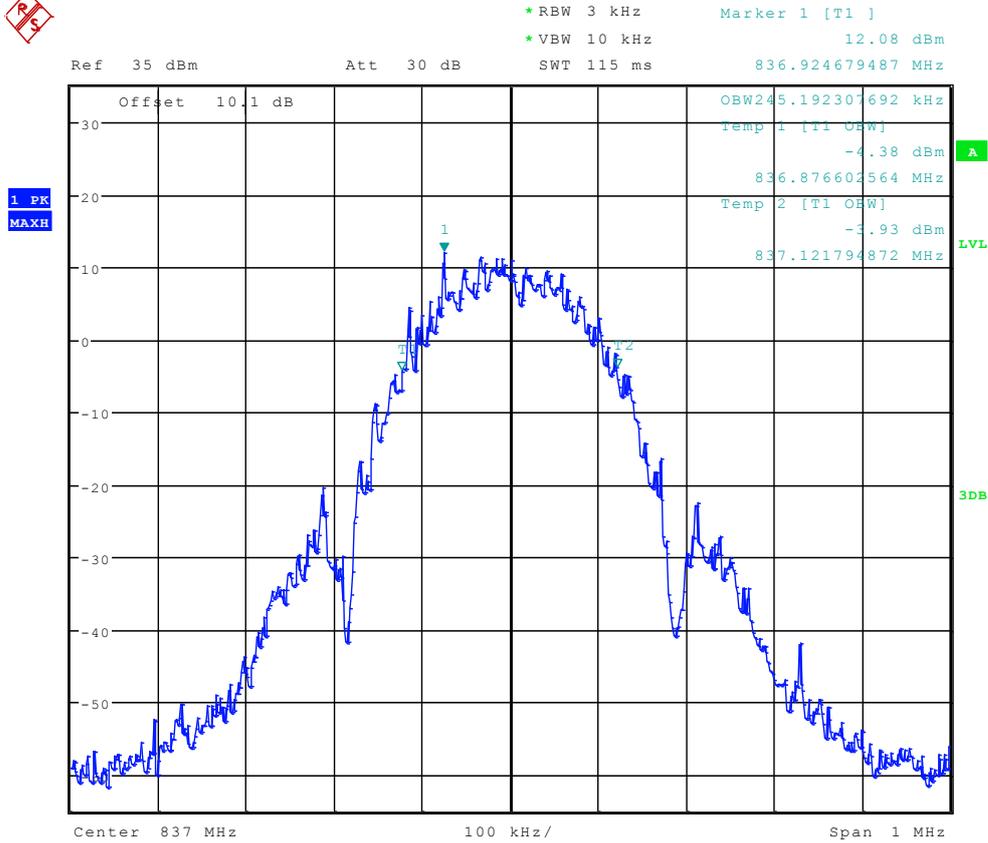







## Appendix D

# Band Edges Compliance


According to FCC Part 2.1051 & Part22 Subpart H



# TM1:GPRS/GSM

## Left Edge


### Channel 128

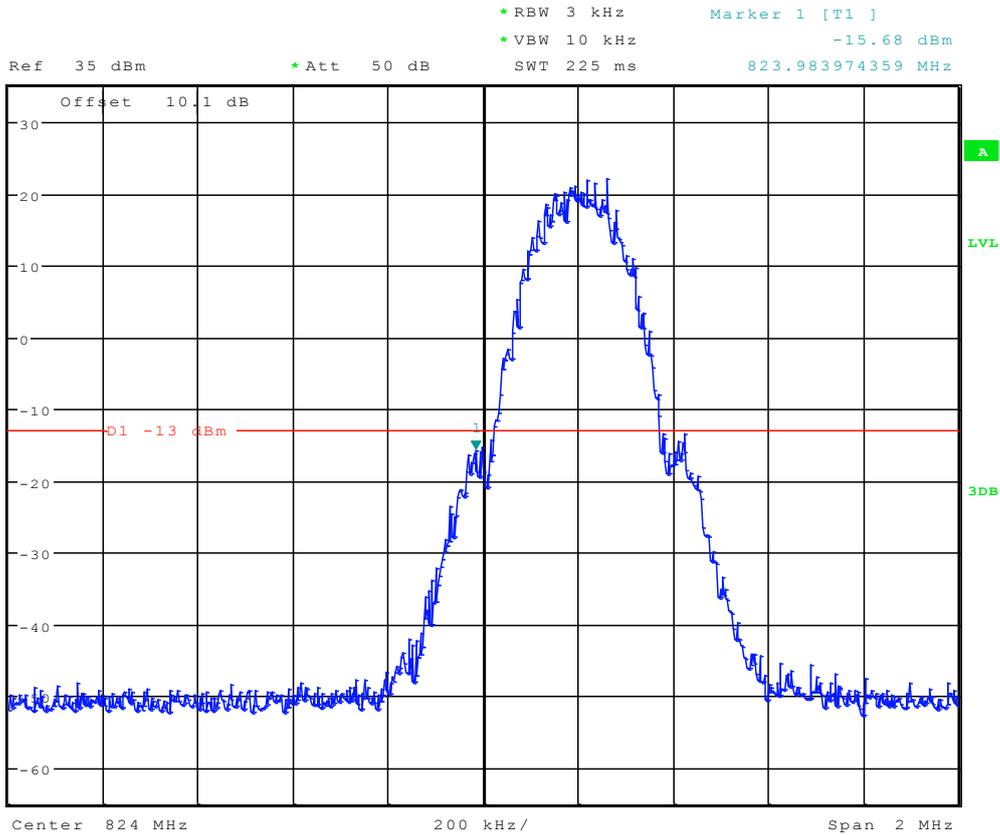

Date: 28.FEB.2012 17:12:42



## Right Edge Channel 251

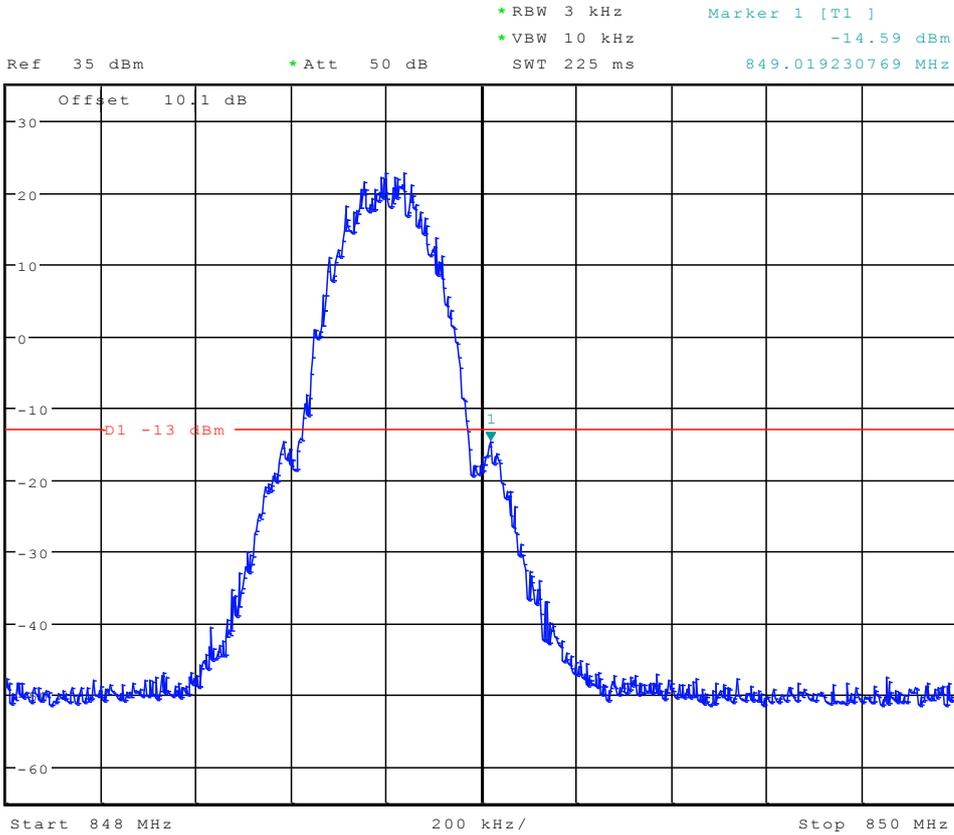


Date: 28.FEB.2012 17:11:43



# TM2:EDGE

## Left Edge

### Channel 128

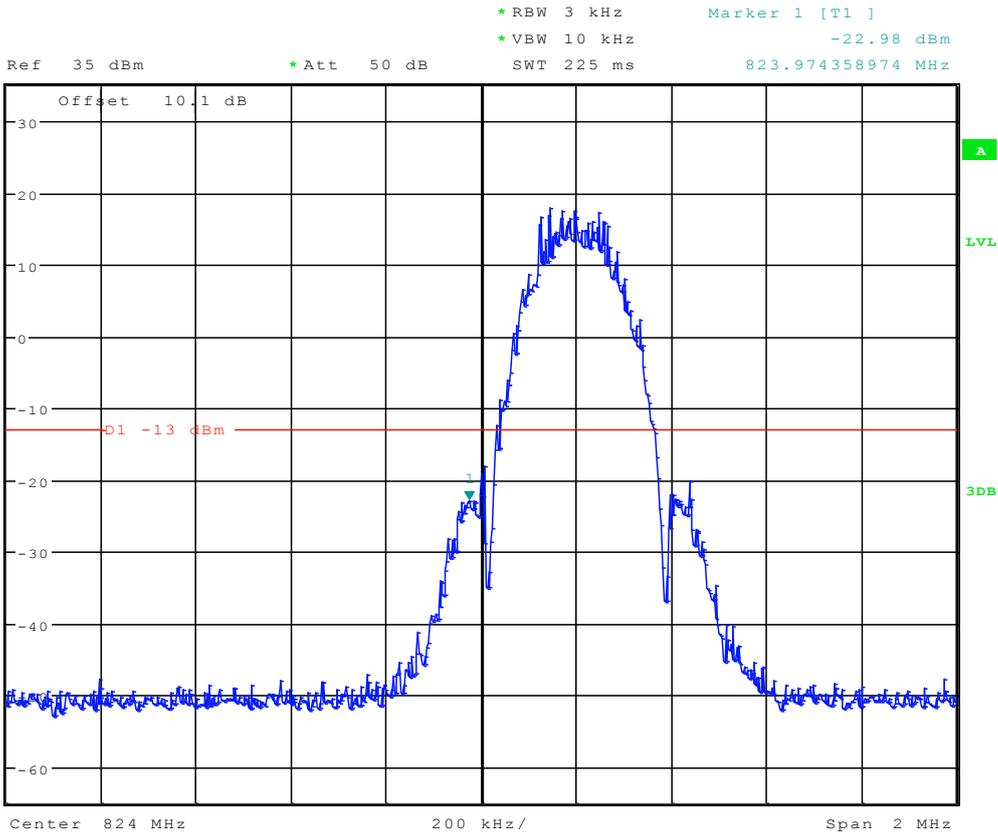


Date: 28.FEB.2012 17:14:53



## Right Edge Channel 251



\*RBW 3 kHz      Marker 1 [T1 ]  
 \*VBW 10 kHz      -20.16 dBm  
 Ref 35 dBm      \*Att 50 dB      SWT 225 ms      849.025641026 MHz

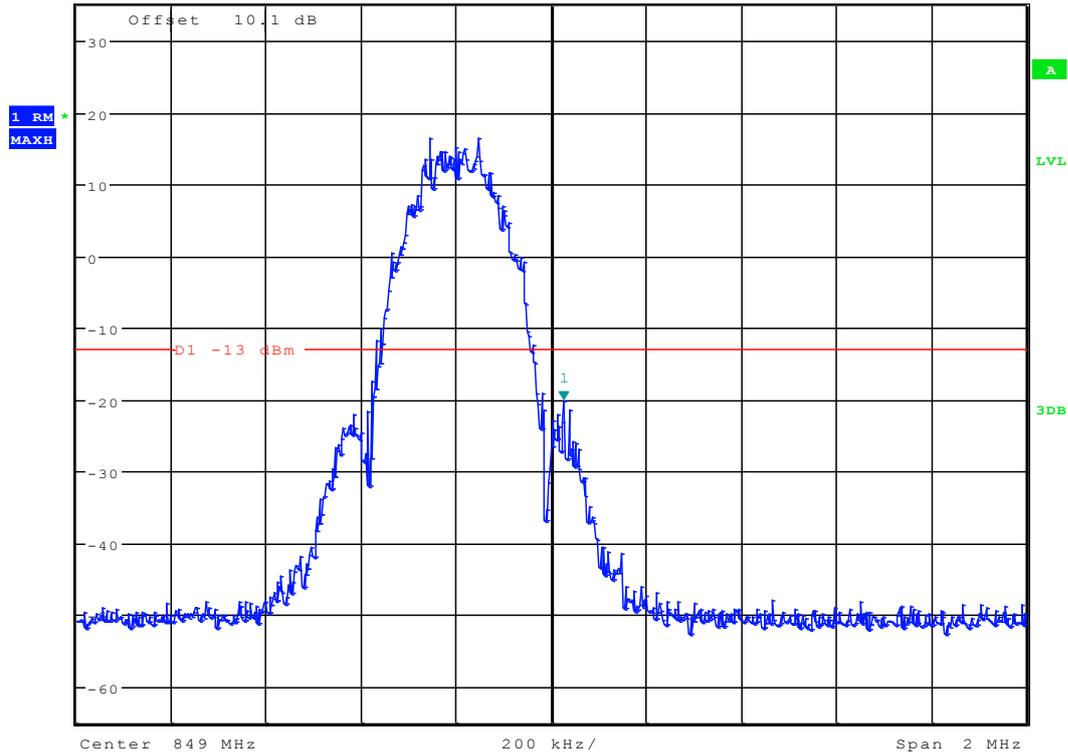

Date: 28.FEB.2012 17:15:45

The END



## Appendix E

# Spurious Emission at Antenna Terminal


According to FCC Part 2.1051 & Part22 Subpart H



# TM1:GPRS/GSM Channel 128




Ref 35 dBm      Att 55 dB      \* RBW 1 kHz      Marker 1 [T1]      \* VBW 10 kHz      -34.19 dBm  
SWT 145 ms      9.451923077 kHz

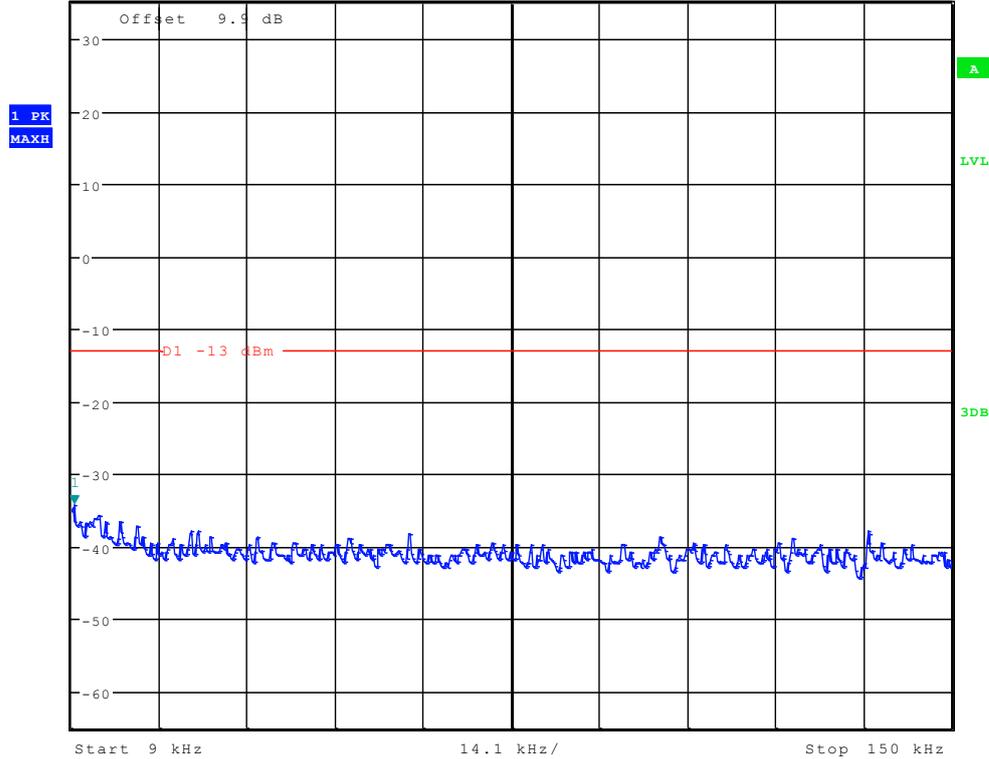




Ref 35 dBm Att 55 dB SWT 300 ms  
\*RBW 10 kHz Marker 1 [T1 ]  
\*VBW 30 kHz -28.36 dBm  
150.000000000 kHz

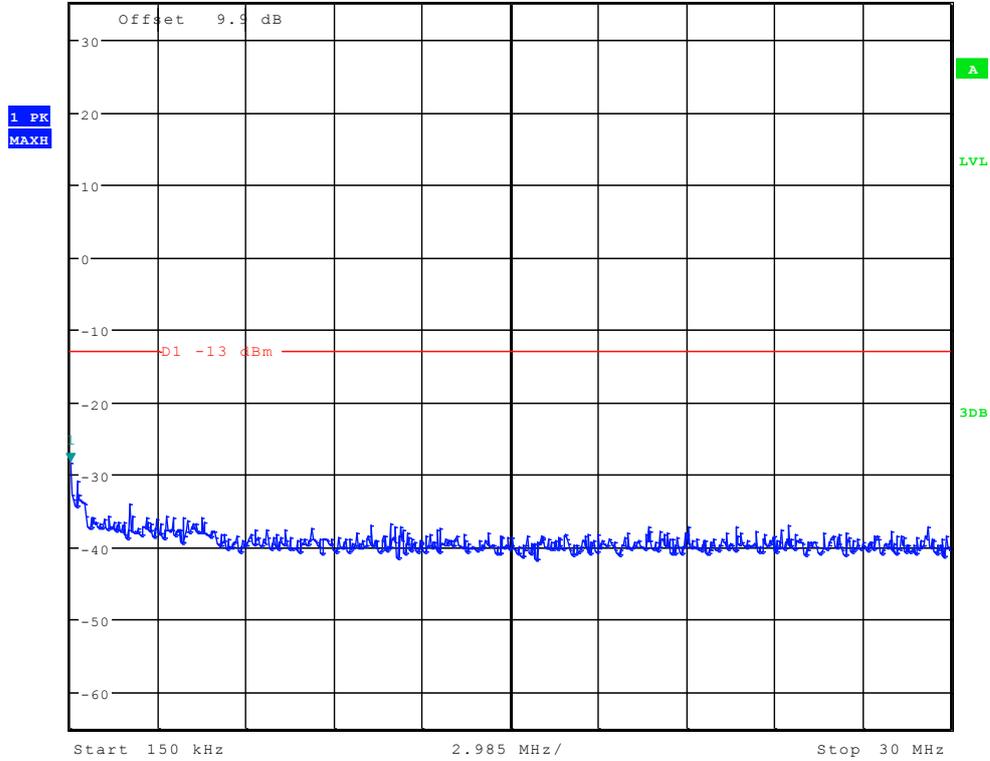




Ref 35 dBm Att 50 dB SWT 100 ms  
\*RBW 100 kHz Marker 1 [T1] 23.52 dBm  
\*VBW 300 kHz 825.897435897 MHz

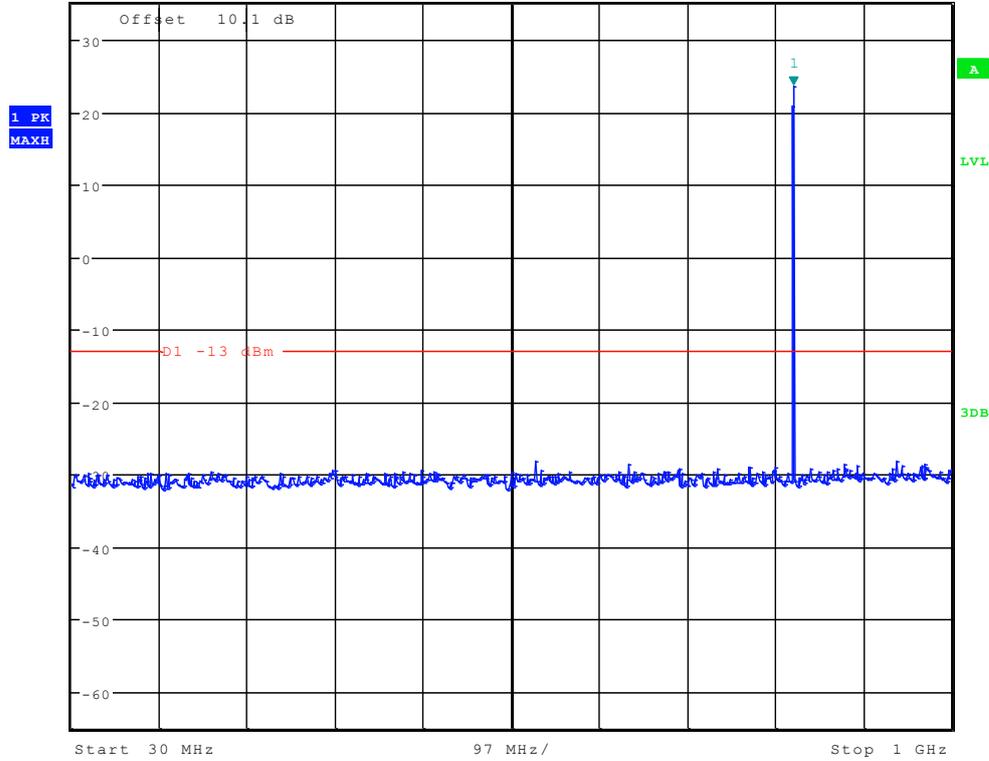




Ref 35 dBm Att 50 dB SWT 70 ms  
\*RBW 1 MHz Marker 1 [T1] -17.27 dBm  
\*VBW 3 MHz 2.562900641 GHz

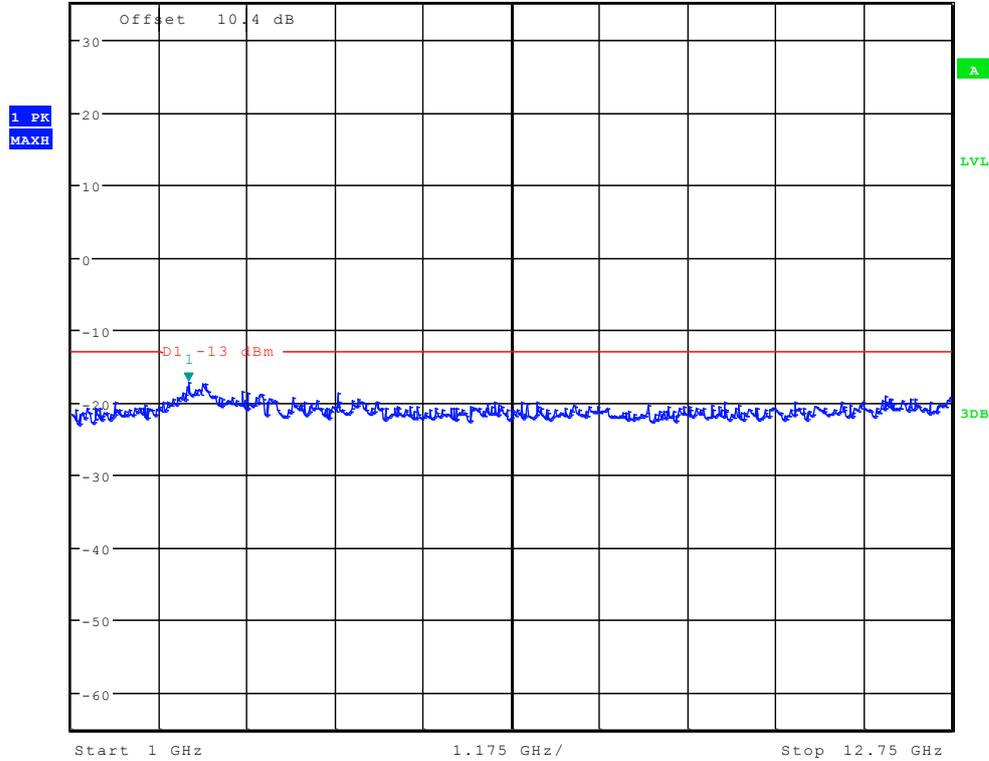




# Channel 192

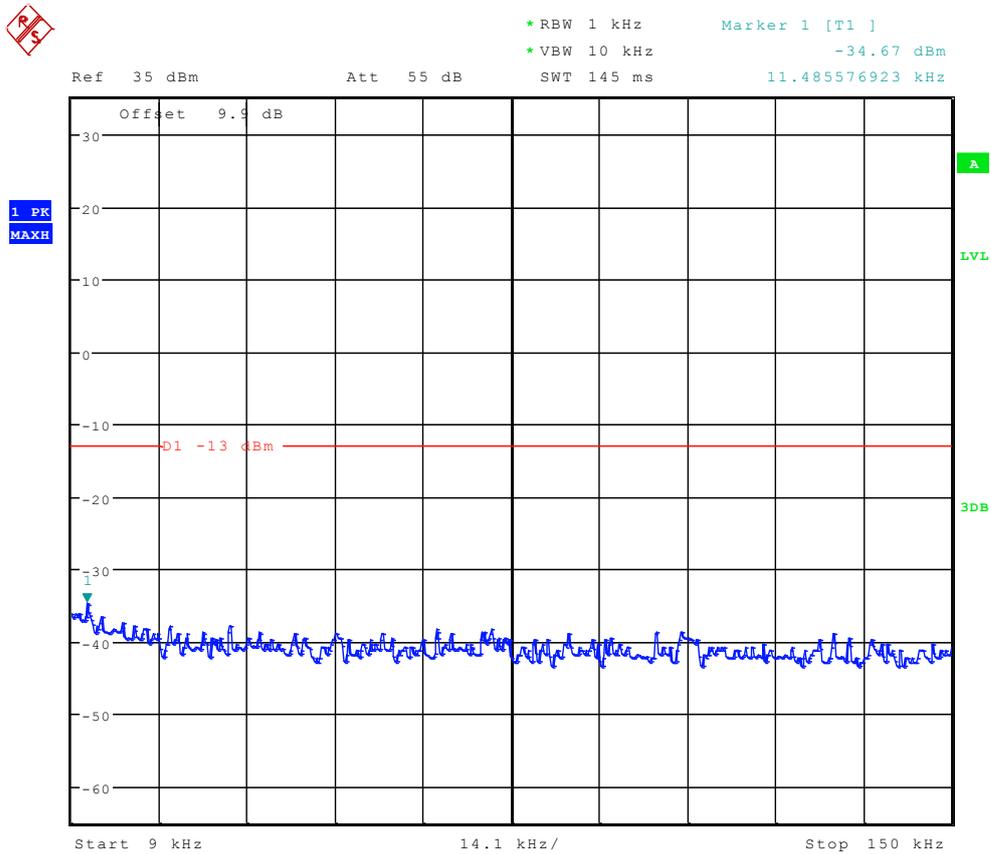




Ref 35 dBm Att 55 dB SWT 300 ms  
\*RBW 10 kHz Marker 1 [T1] -29.76 dBm  
\*VBW 30 kHz 197.836538462 kHz

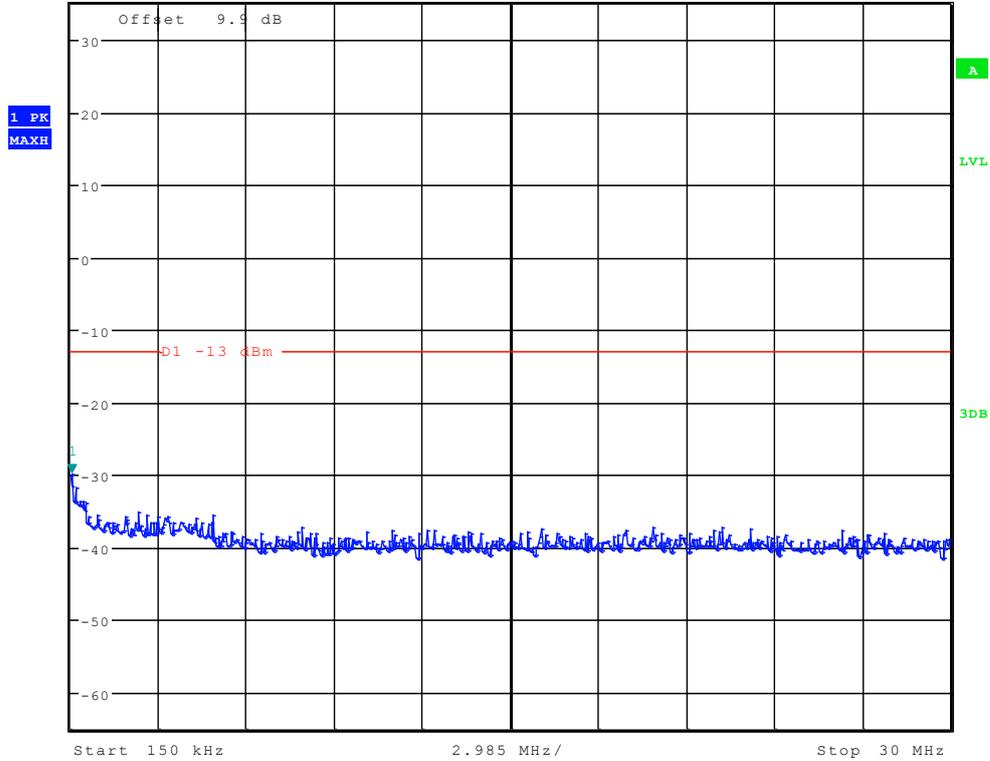




Ref 35 dBm Att 50 dB SWT 100 ms  
\*RBW 100 kHz Marker 1 [T1] 23.05 dBm  
\*VBW 300 kHz 838.333333333 MHz

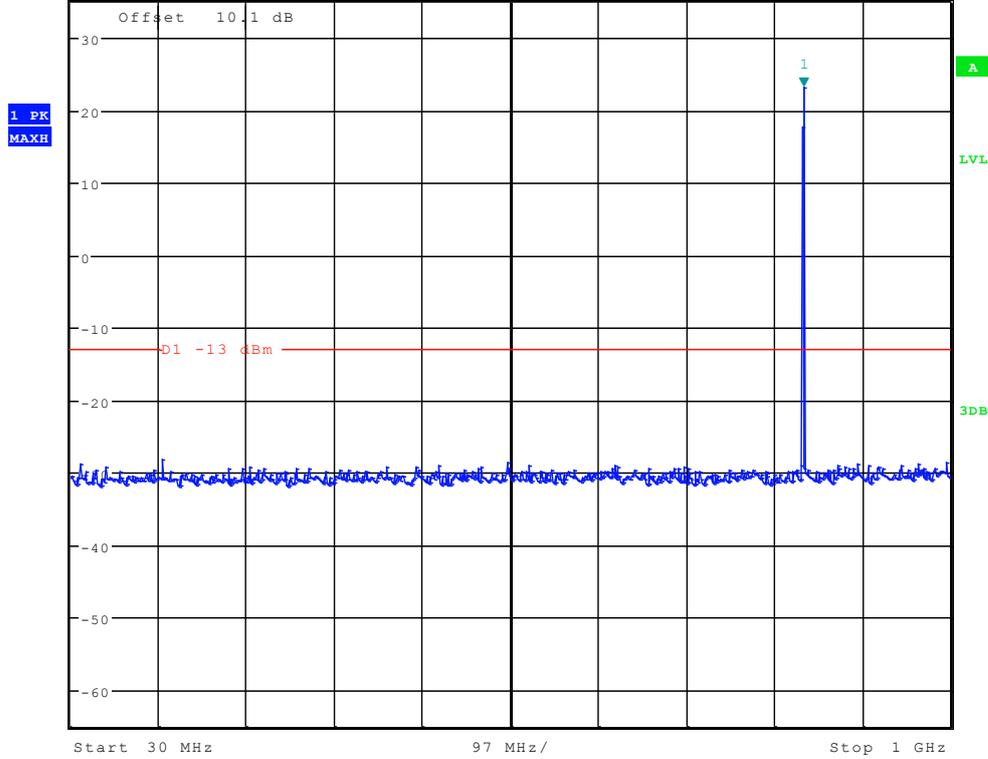




\*RBW 1 MHz      Marker 1 [T1 ]  
 \*VBW 3 MHz      -17.64 dBm  
 Ref 35 dBm      Att 50 dB      SWT 70 ms      2.638221154 GHz

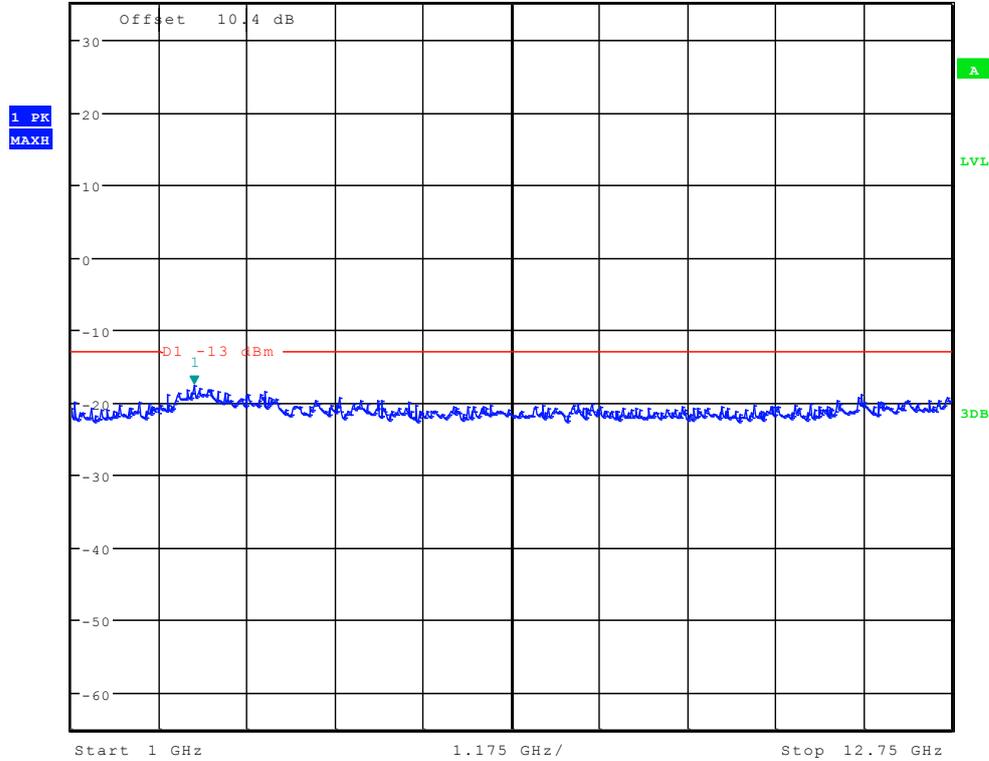




# Channel 251

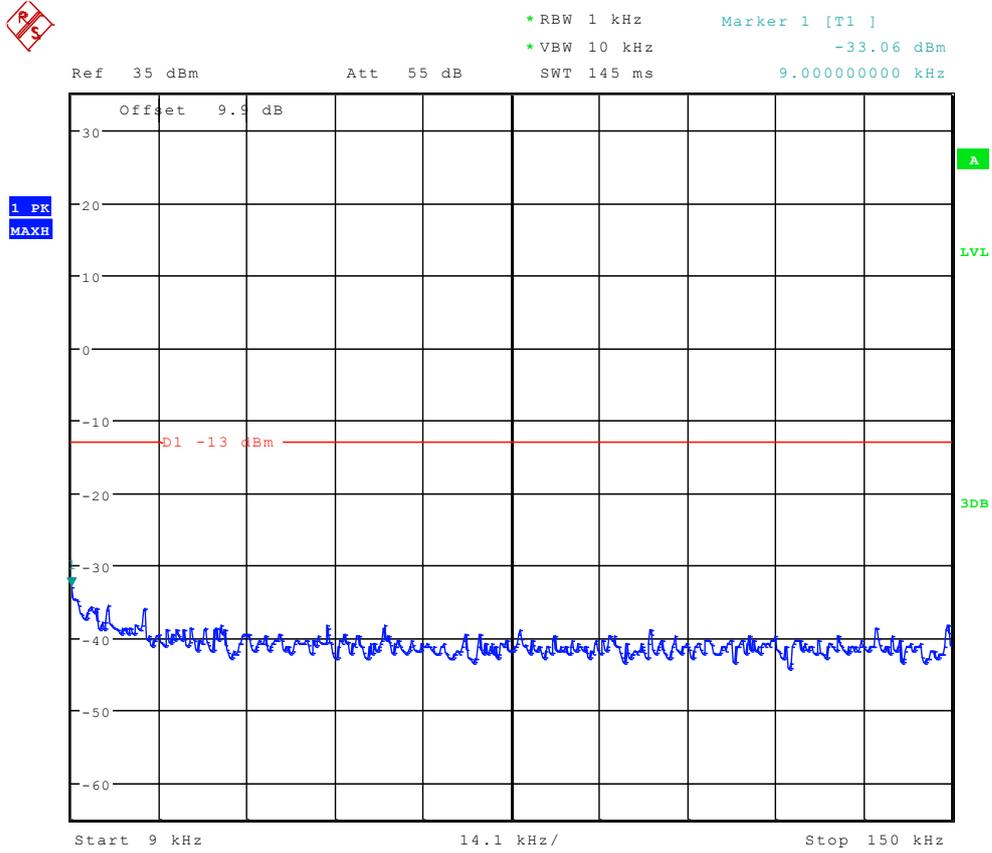




Ref 35 dBm      Att 55 dB      SWT 300 ms      197.836538462 kHz  
\*RBW 10 kHz      Marker 1 [T1 ]  
\*VBW 30 kHz      -27.99 dBm

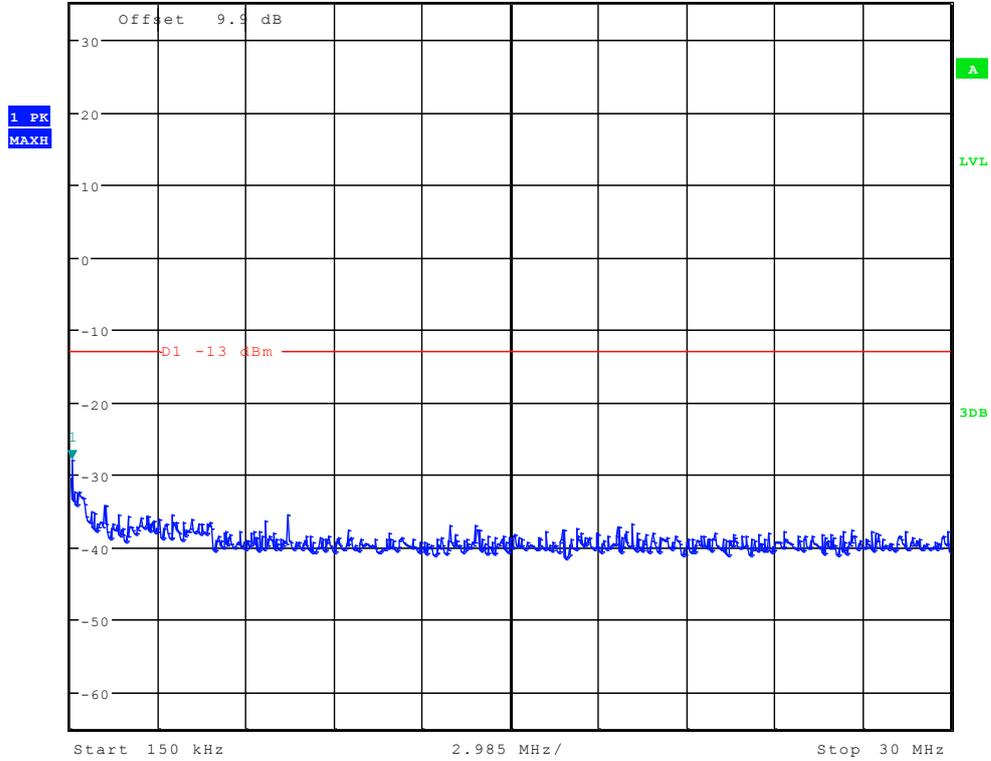




Ref 35 dBm Att 50 dB SWT 100 ms  
\*RBW 100 kHz Marker 1 [T1 ] 23.11 dBm  
\*VBW 300 kHz 849.214743590 MHz

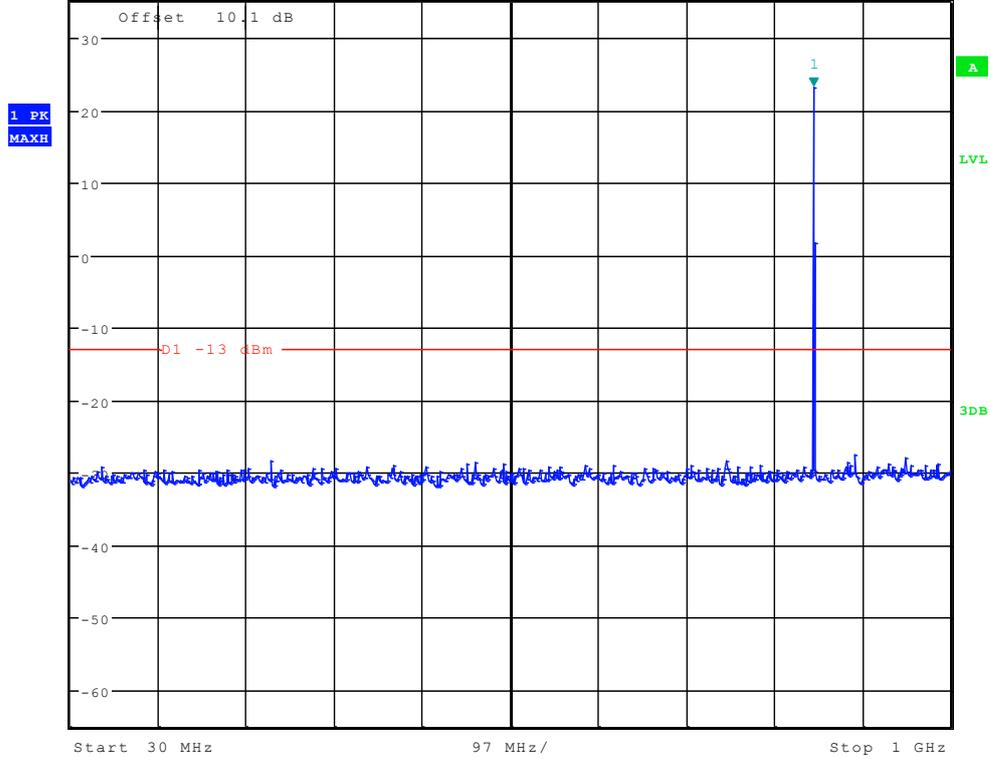




Ref 35 dBm Att 50 dB SWT 70 ms  
\*RBW 1 MHz \*VBW 3 MHz  
Marker 1 [T1] -16.76 dBm  
2.732371795 GHz

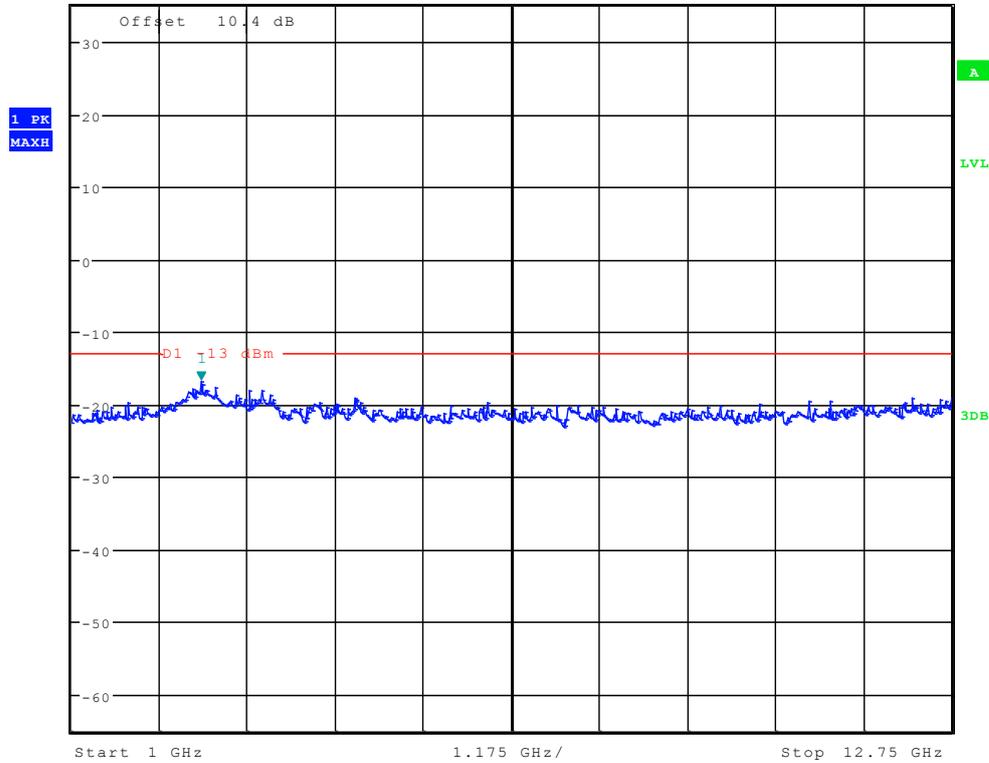




# TM2:EDGE Channel 128

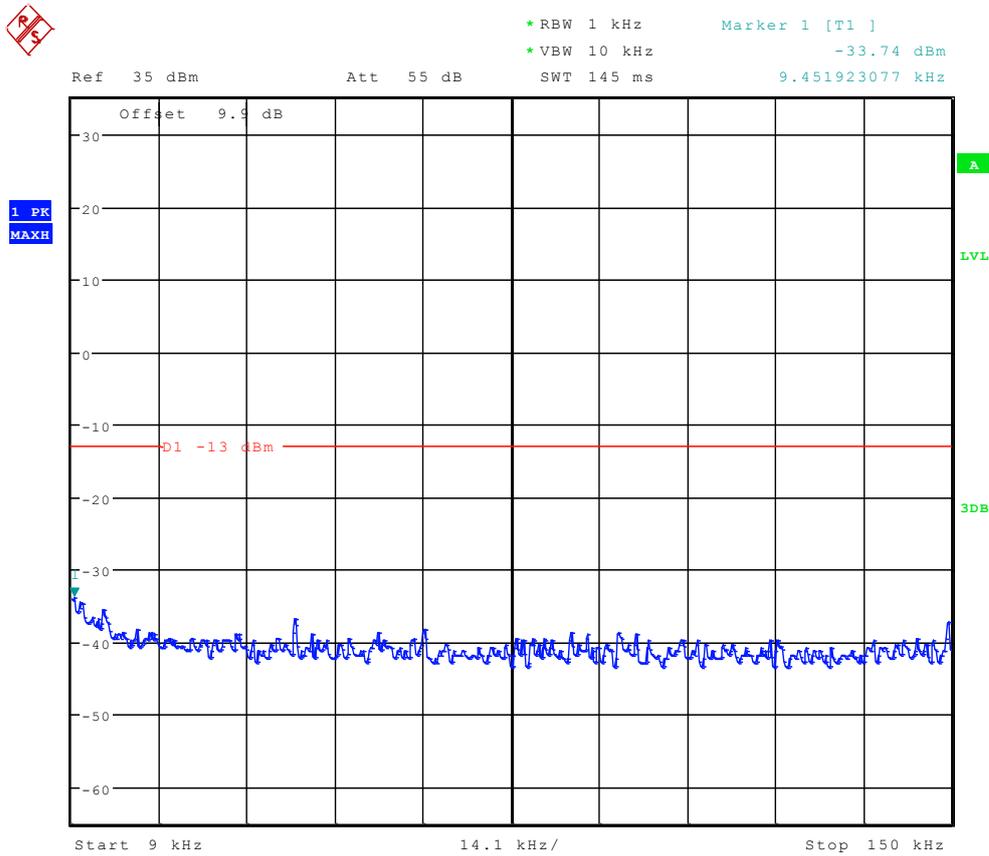




Ref 35 dBm Att 55 dB SWT 300 ms  
\*RBW 10 kHz Marker 1 [T1 ]  
\*VBW 30 kHz -29.32 dBm  
197.836538462 kHz

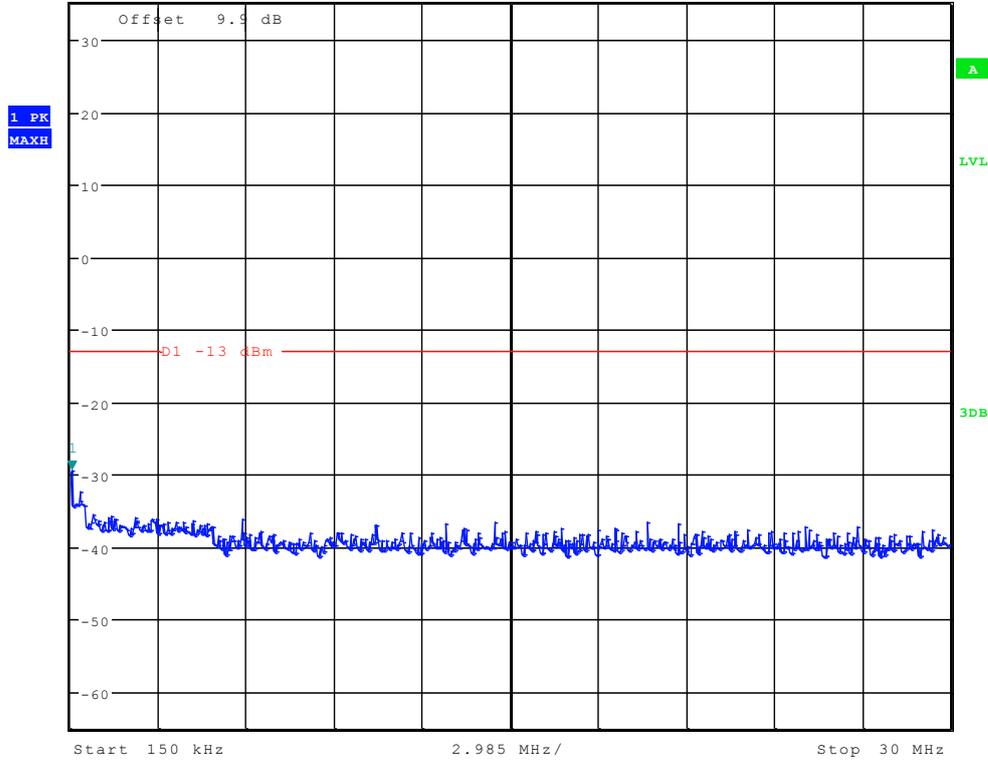




Ref 35 dBm Att 50 dB SWT 100 ms  
\*RBW 100 kHz Marker 1 [T1] 22.57 dBm  
\*VBW 300 kHz 825.897435897 MHz

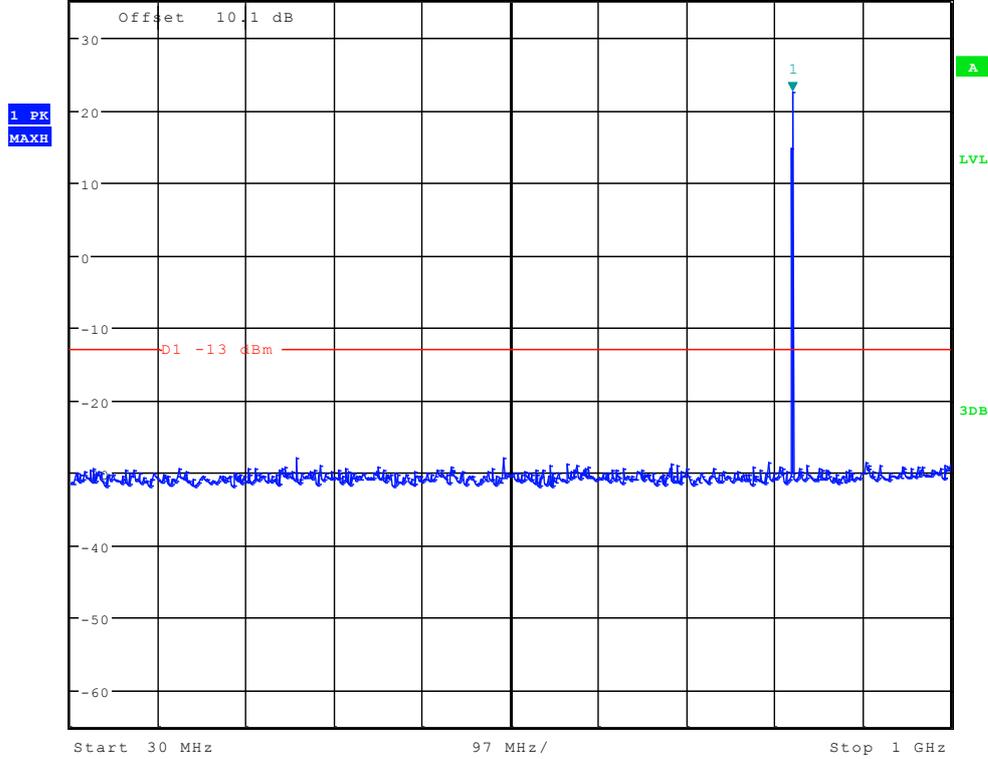



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -16.34 dBm  
2.883012821 GHz

Ref 35 dBm      Att 50 dB      SWT 70 ms

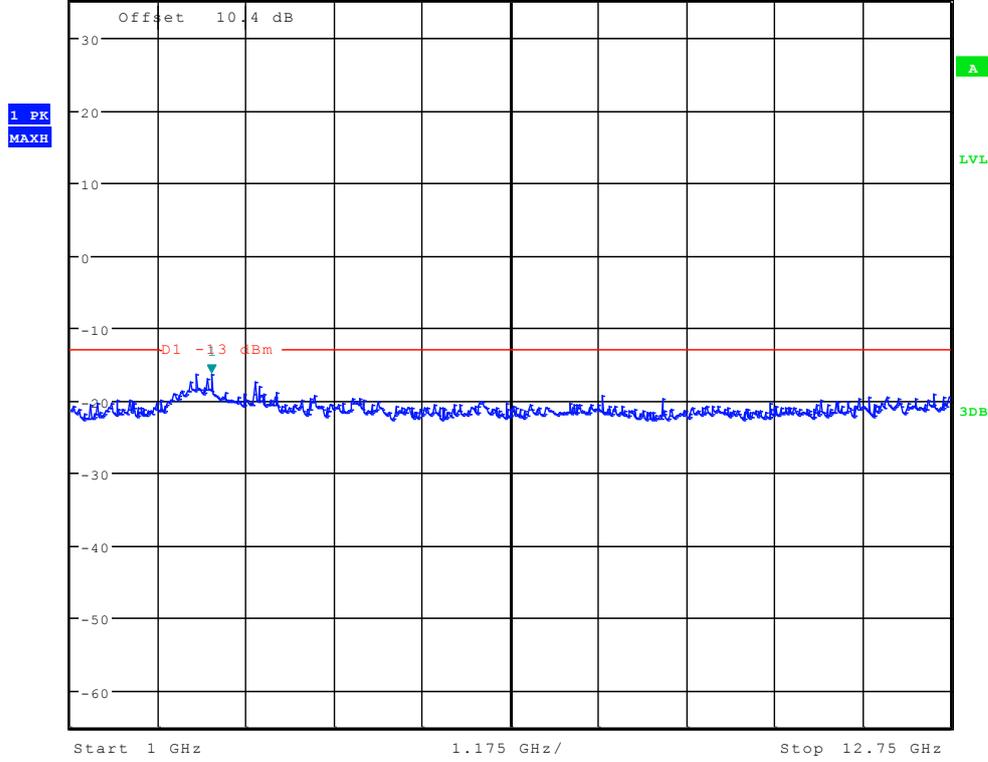




# Channel 192




\* RBW 1 kHz      Marker 1 [T1 ]  
 \* VBW 10 kHz      -34.38 dBm  
 Ref 35 dBm      Att 55 dB      SWT 145 ms      9.451923077 kHz

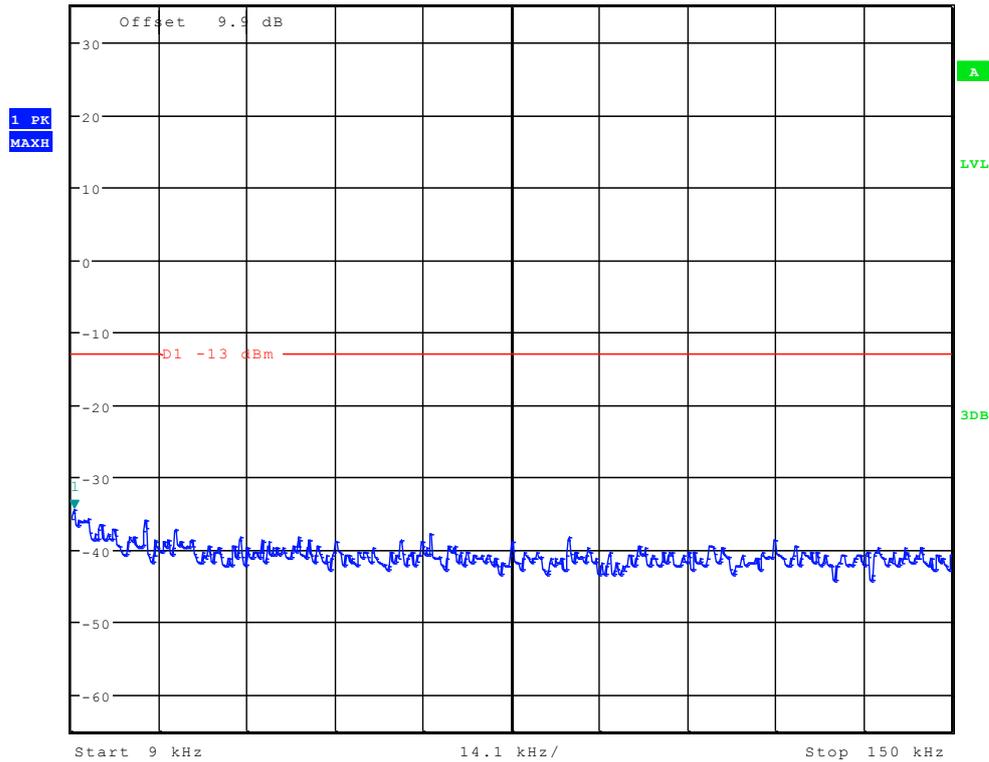




\*RBW 10 kHz      Marker 1 [T1 ]  
 \*VBW 30 kHz      -28.13 dBm  
 Ref 35 dBm      Att 55 dB      SWT 300 ms      150.000000000 kHz

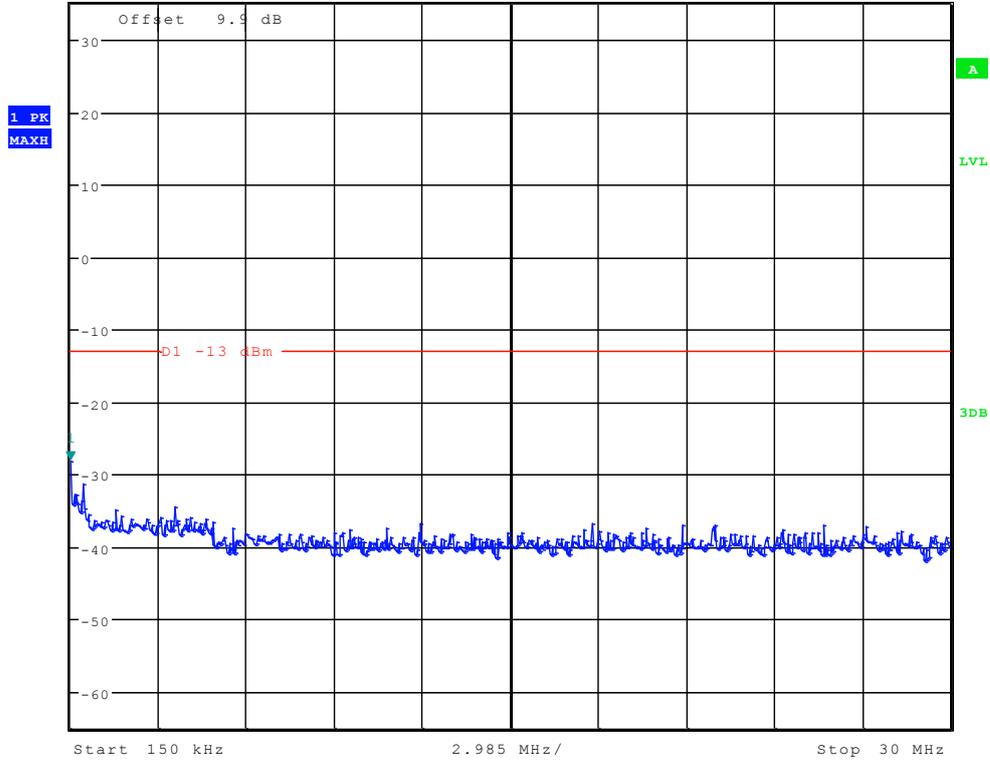




\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 300 kHz      22.76 dBm  
Ref 35 dBm      Att 50 dB      SWT 100 ms      838.333333333 MHz

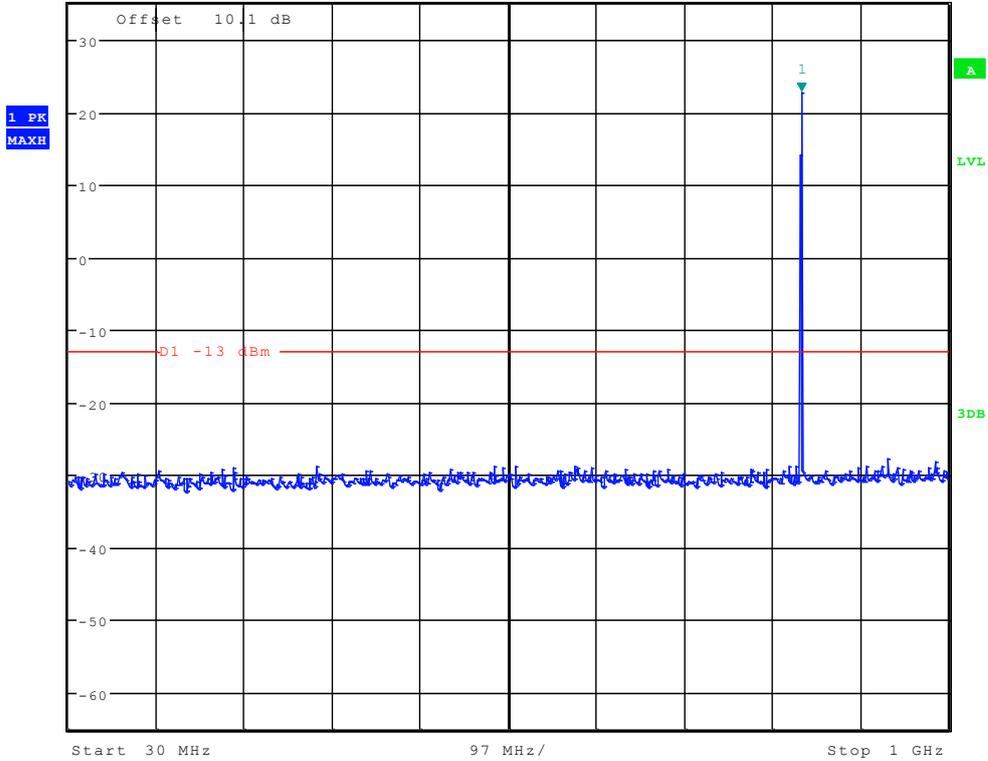



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -17.38 dBm  
Ref 35 dBm      Att 50 dB      SWT 70 ms      2.713541667 GHz

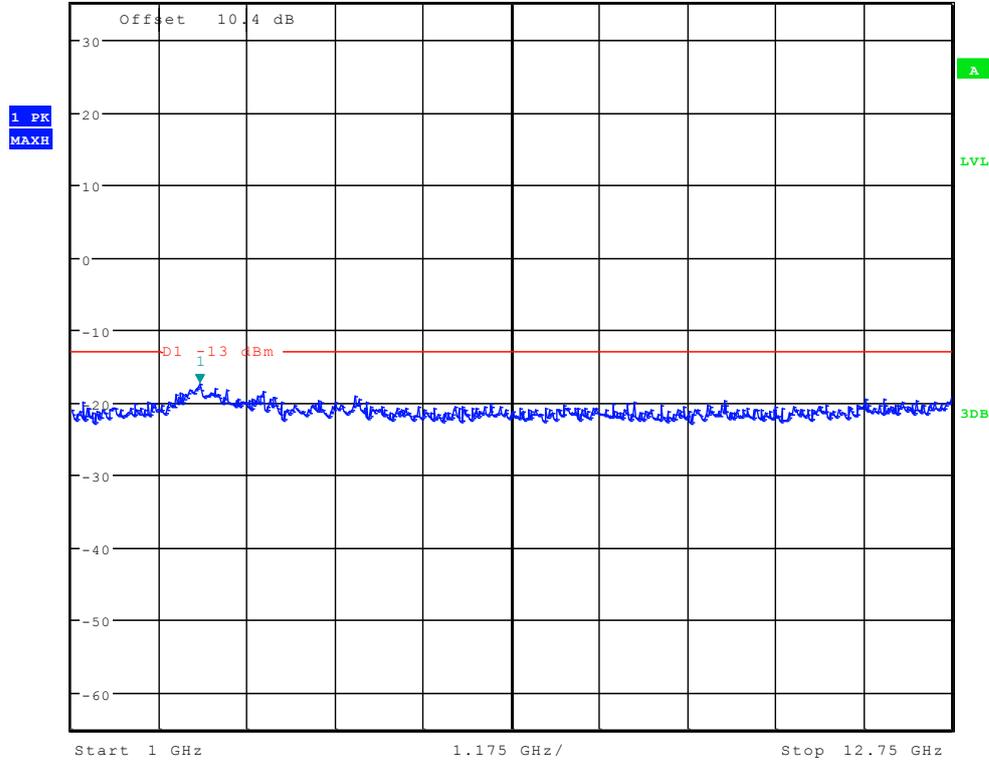




# Channel 251




\* RBW 1 kHz  
 \* VBW 10 kHz  
 Ref 35 dBm Att 55 dB SWT 145 ms  
 Marker 1 [T1] -35.61 dBm  
 9.451923077 kHz

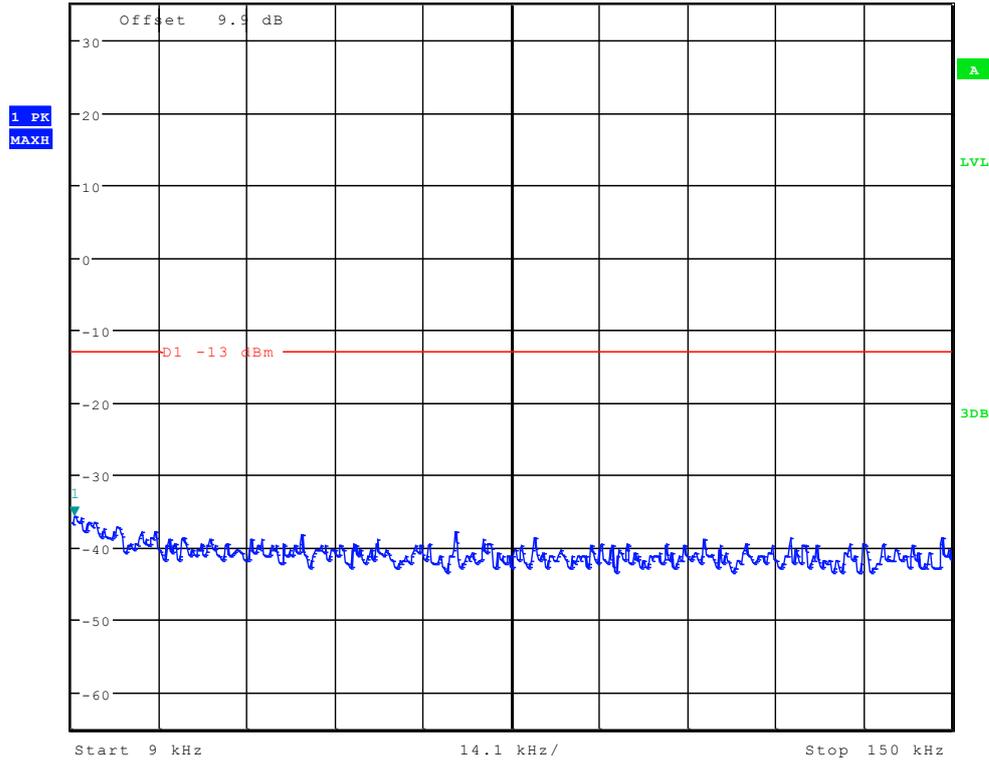




Ref 35 dBm Att 55 dB SWT 300 ms  
\*RBW 10 kHz Marker 1 [T1] -27.67 dBm  
\*VBW 30 kHz 197.836538462 kHz

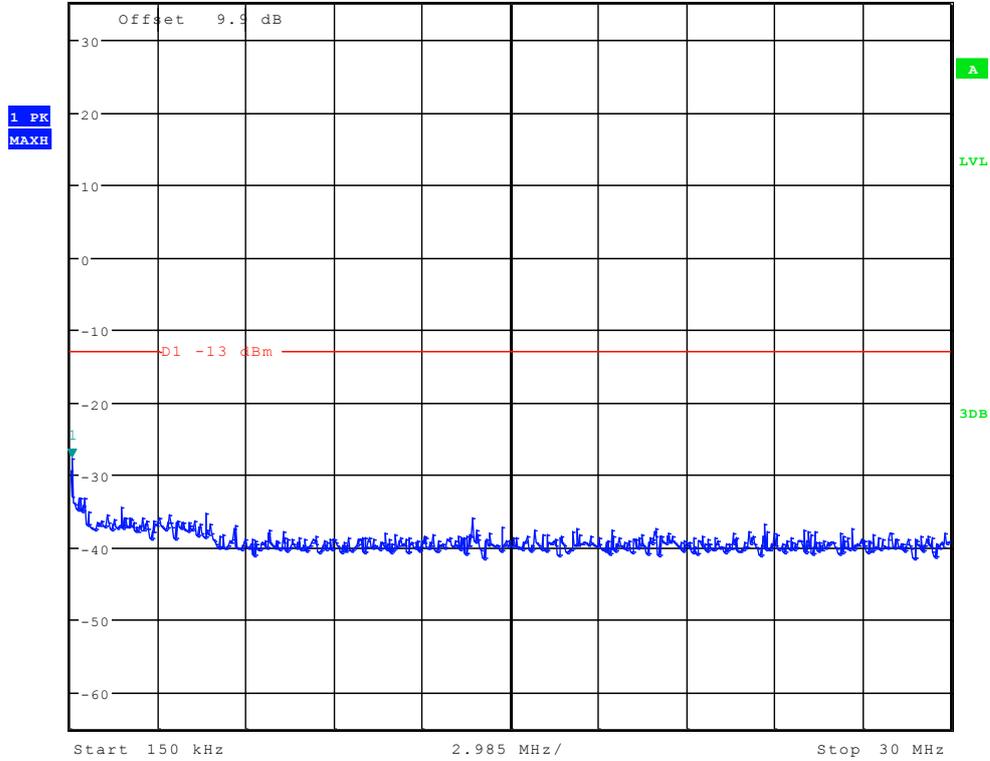




Ref 35 dBm Att 50 dB SWT 100 ms  
\*RBW 100 kHz Marker 1 [T1 ] 22.58 dBm  
\*VBW 300 kHz 849.214743590 MHz

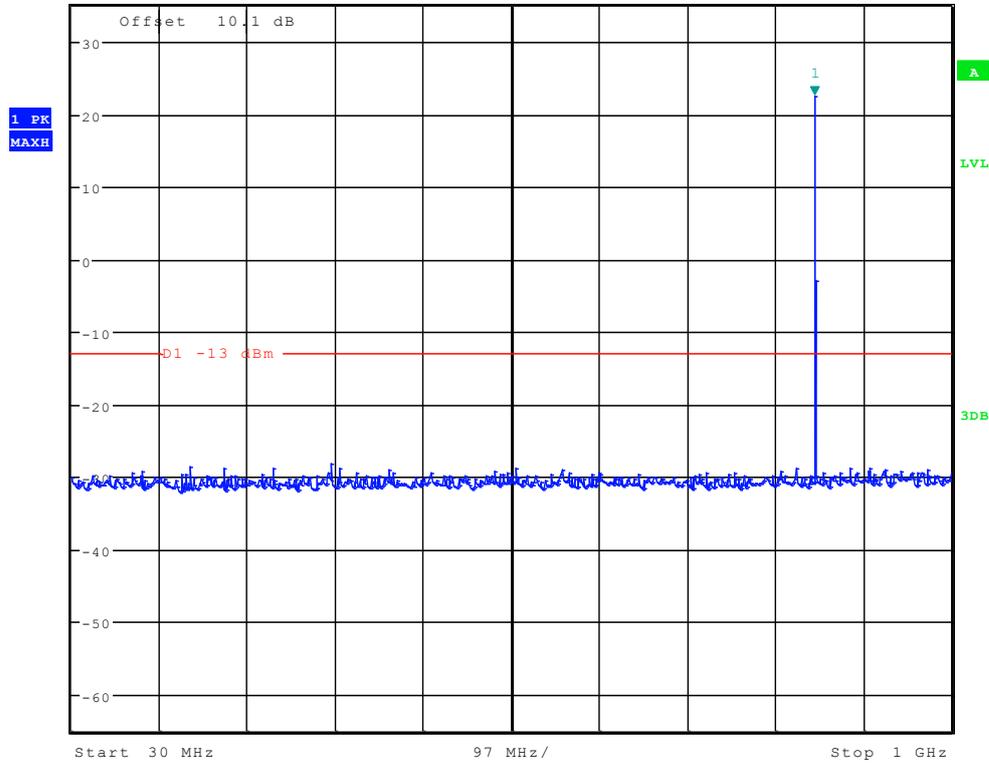



Ref 35 dBm      Att 50 dB      SWT 70 ms      \*RBW 1 MHz      Marker 1 [T1]      -17.61 dBm  
\*VBW 3 MHz      2.977163462 GHz

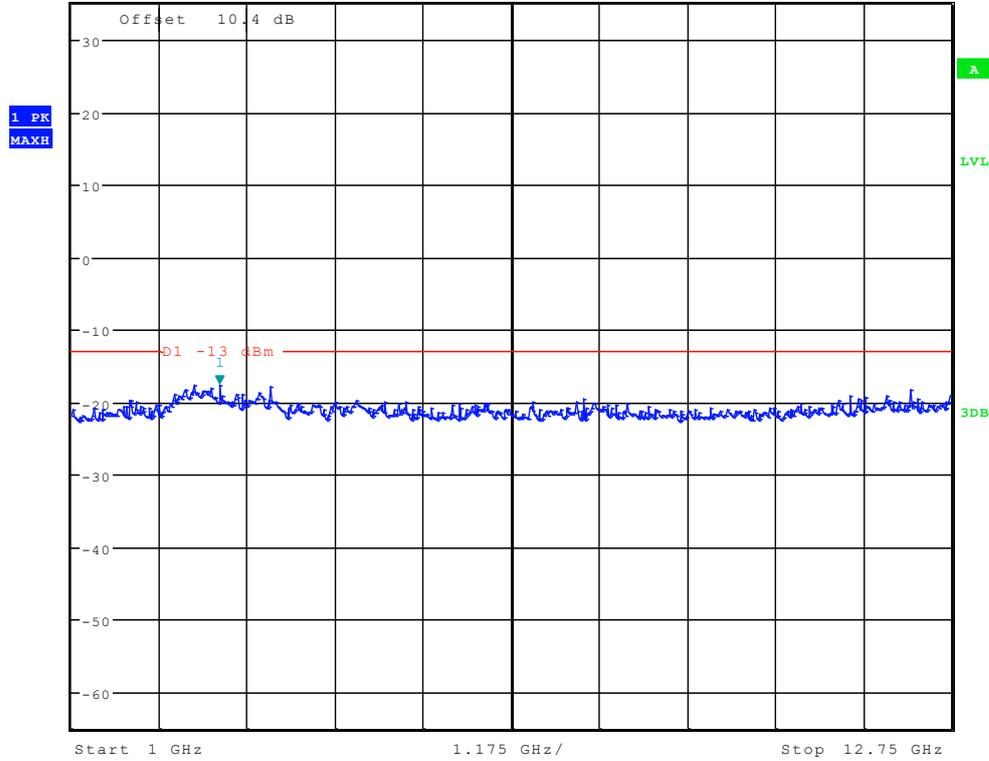

The END



## **Appendix F**


# **Field Strength of Spurious Emissions**

According to FCC Part 2.1053 & Part 22.917




## GSM 850

Traffic Mode (9kHz-30MHz)

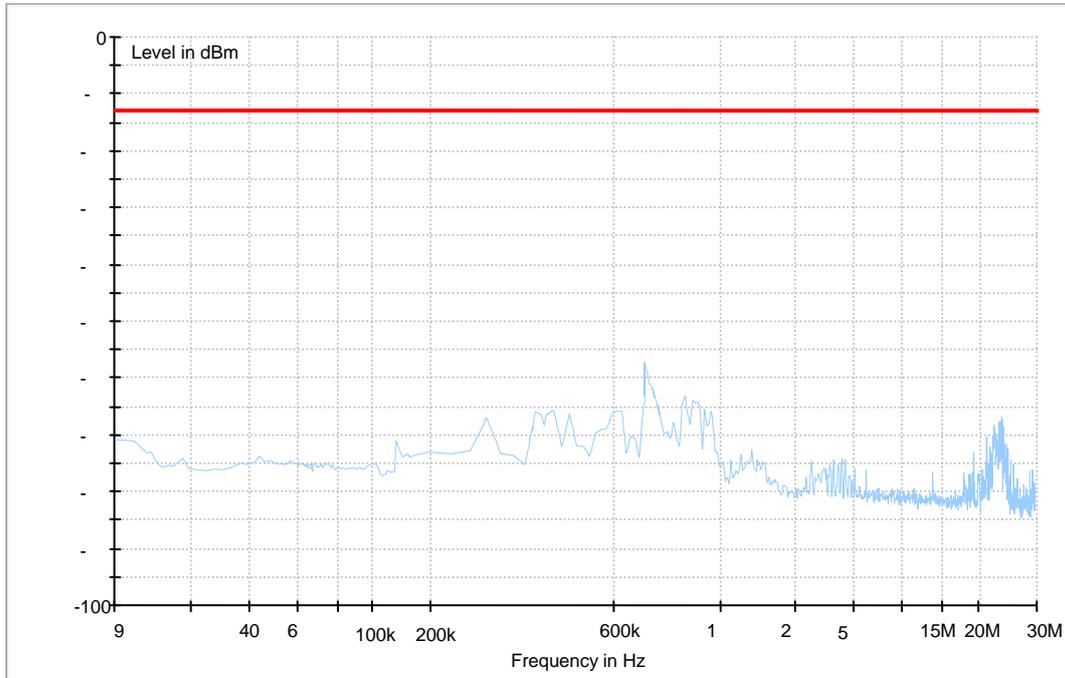




### Traffic Mode (30MHz-3GHz)

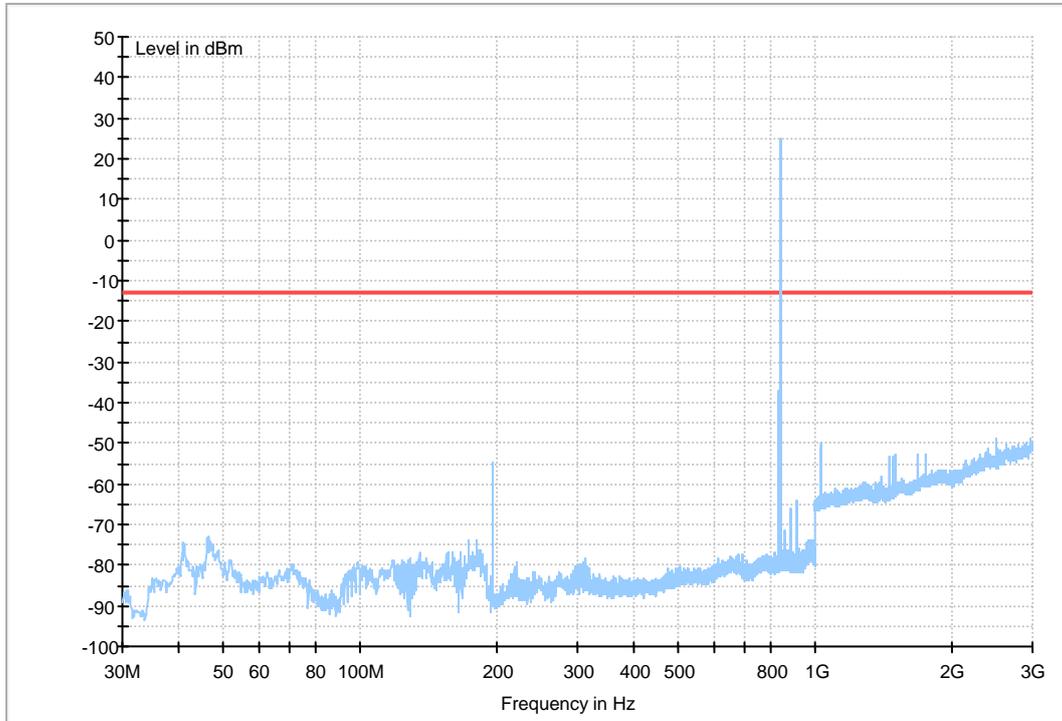




### Traffic Mode (3GHz-18GHz)

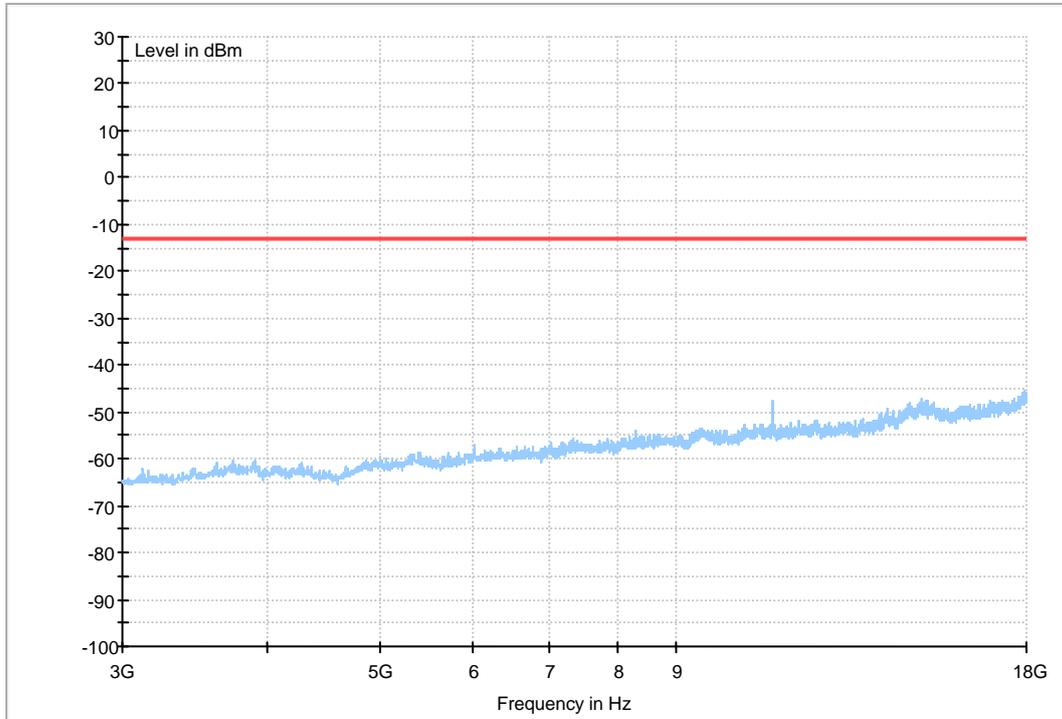




## GPRS 850

Traffic Mode (9kHz-30MHz)

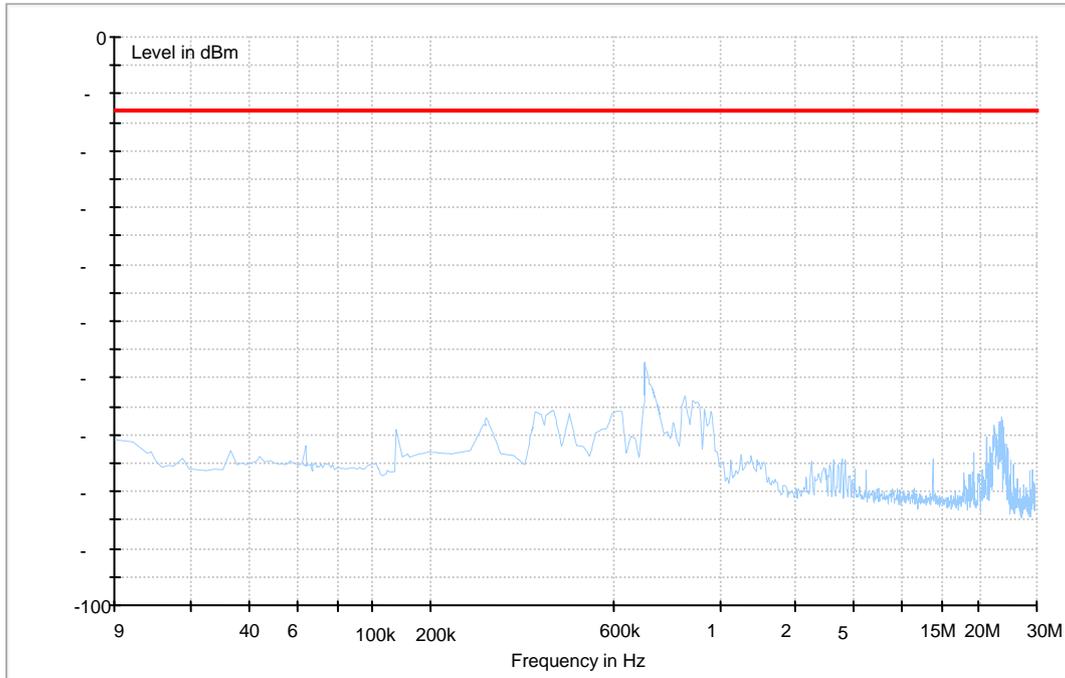




Traffic Mode (30MHz-3GHz)

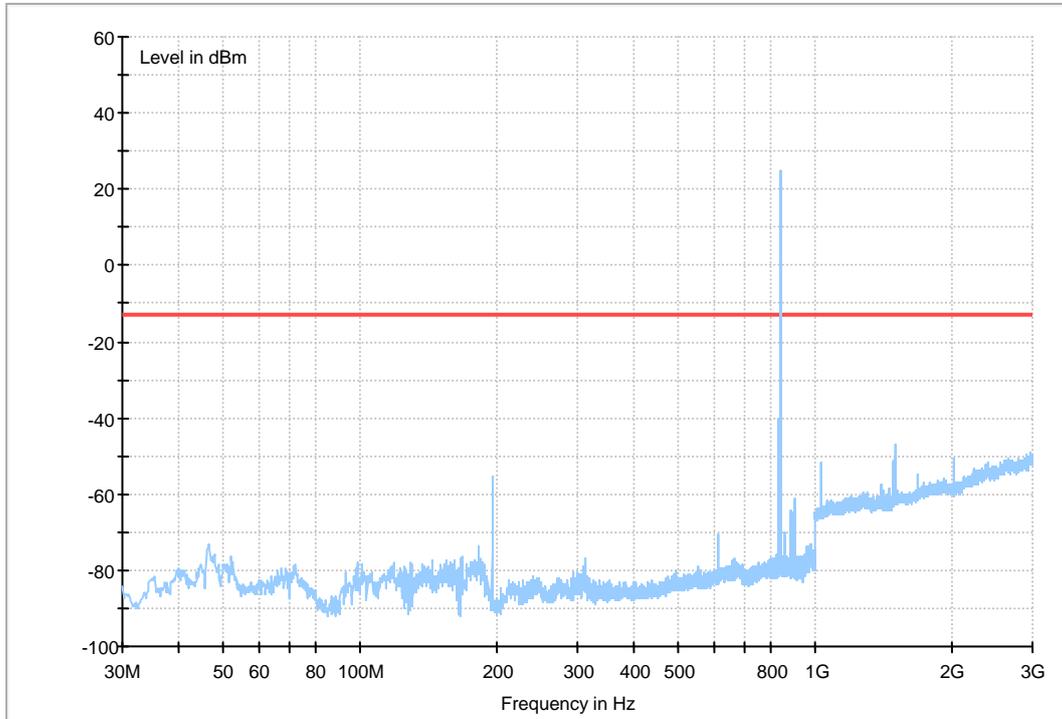




### Traffic Mode (3GHz-18GHz)

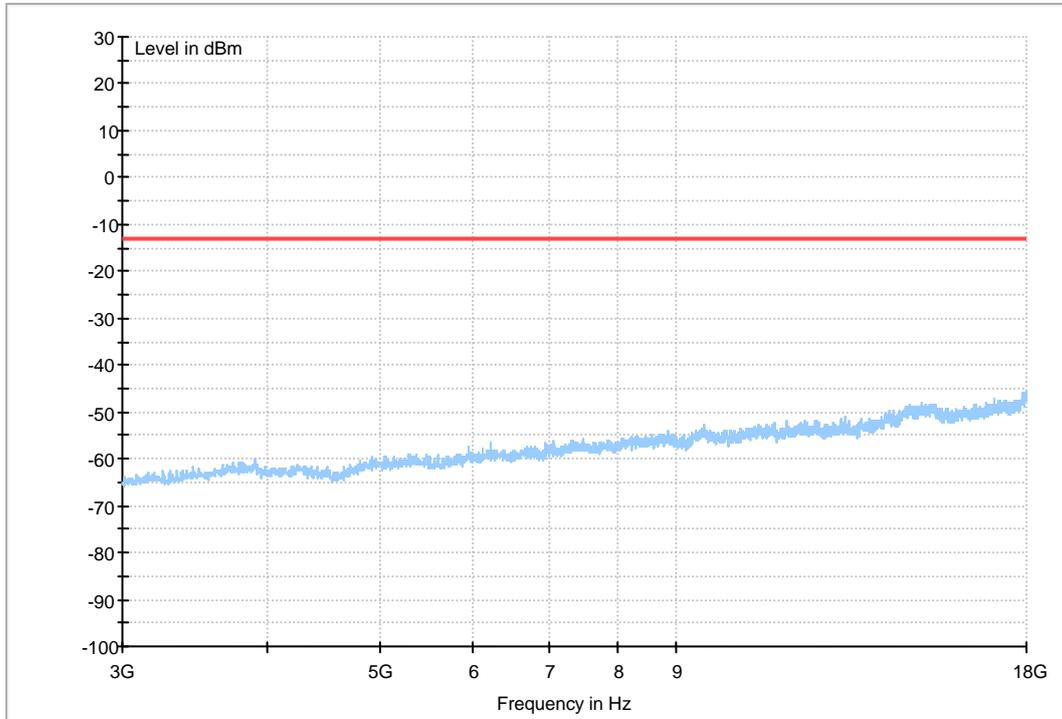




## EDGE 850

Traffic Mode (9kHz-30MHz)

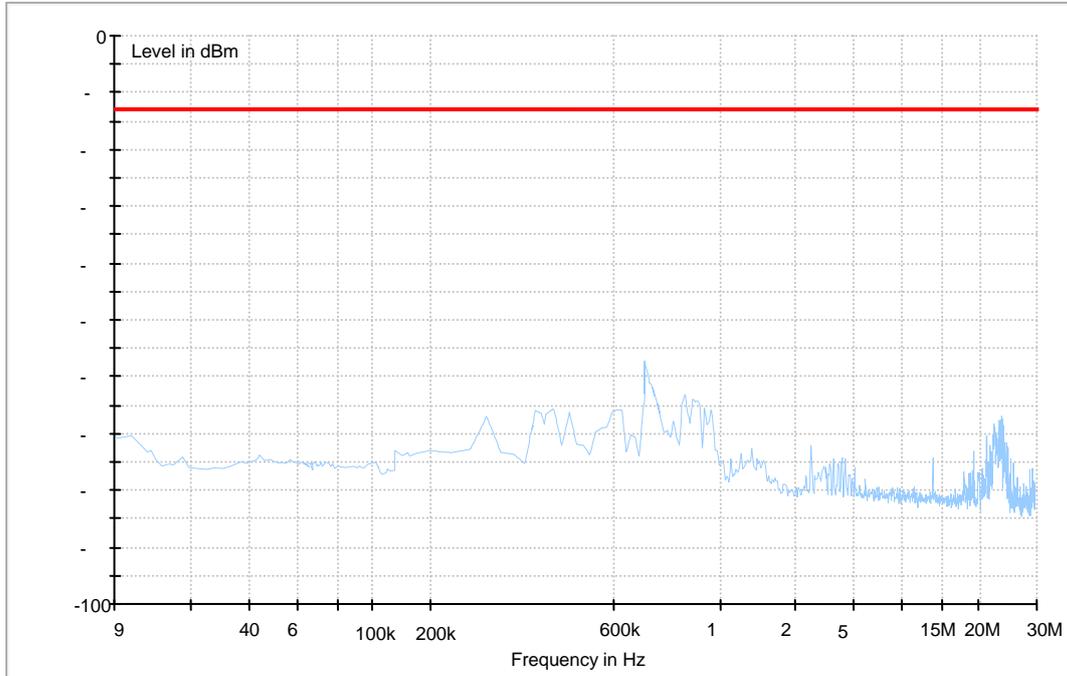




### Traffic Mode (30MHz-3GHz)

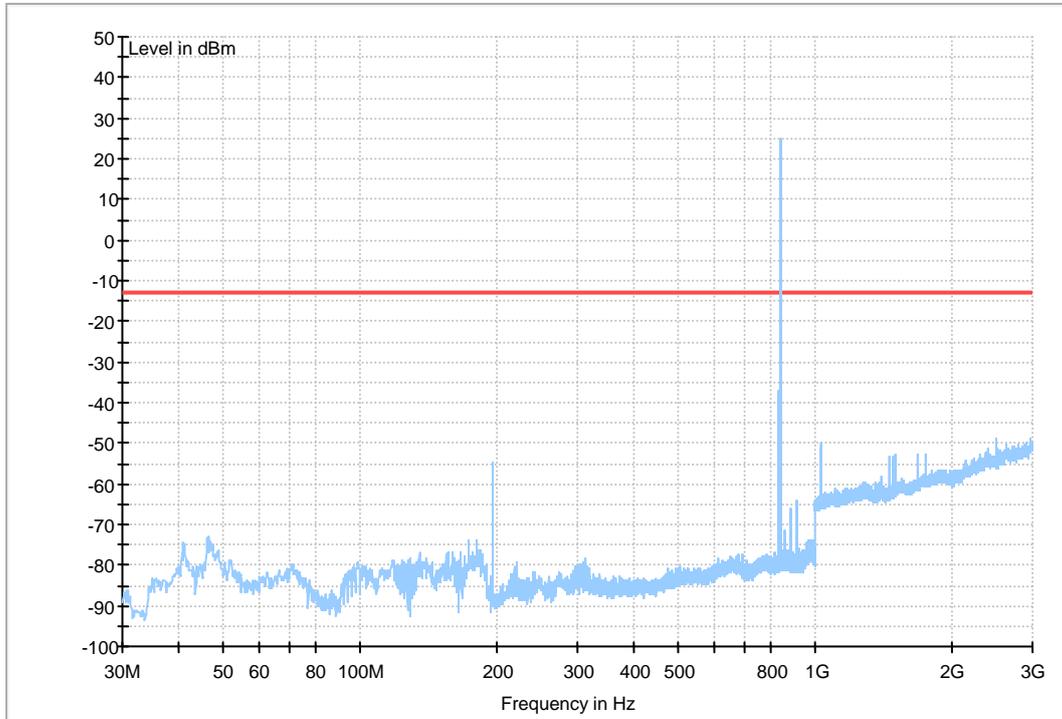



Traffic Mode (3GHz-18GHz)

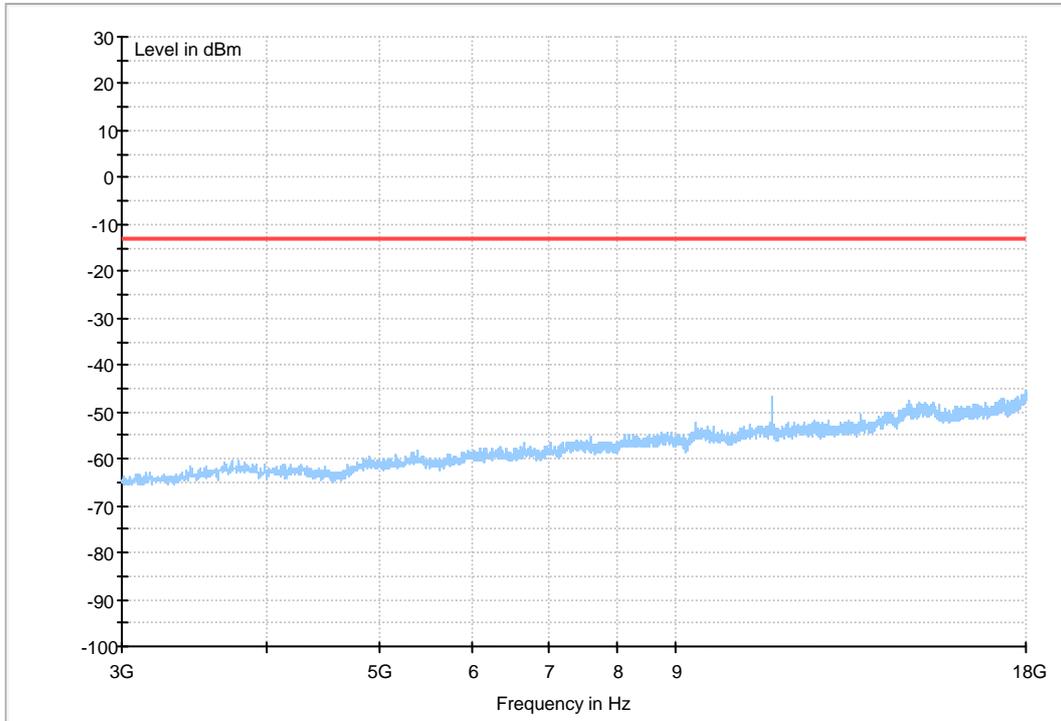

The END



# Appendix G

## Frequency Stability According to FCC Part 2.1055 & Part 22.355



## Frequency Error vs. Temperature:

Test Mode	RF Ch.	Volt.	Temp.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	100%	-30 °C	18	0.021505	---	±2.5	Pass
			-20 °C	21	0.02509	---	±2.5	Pass
			-10 °C	-11	-0.01314	---	±2.5	Pass
			0 °C	17	0.020311	---	±2.5	Pass
			10 °C	9	0.010753	---	±2.5	Pass
			20 °C	16	0.019116	---	±2.5	Pass
			30 °C	-17	-0.02031	---	±2.5	Pass
			40 °C	12	0.014337	---	±2.5	Pass
			50 °C	-12	-0.01434	---	±2.5	Pass
TM 2	M	100%	-30 °C	17	0.020311	---	±2.5	Pass
			-20 °C	-18	-0.02151	---	±2.5	Pass
			-10 °C	12	0.014337	---	±2.5	Pass
			0 °C	11	0.013142	---	±2.5	Pass
			10 °C	-20	-0.02389	---	±2.5	Pass
			20 °C	-16	-0.01912	---	±2.5	Pass
			30 °C	15	0.017921	---	±2.5	Pass
			40 °C	-22	-0.02628	---	±2.5	Pass
			50 °C	16	0.019116	---	±2.5	Pass
TM 3	M	100%	-30 °C	15	0.017934	---	±2.5	Pass
			-20 °C	10	0.011956	---	±2.5	Pass
			-10 °C	-11	-0.01315	---	±2.5	Pass
			0 °C	7	0.008369	---	±2.5	Pass
			10 °C	16	0.01913	---	±2.5	Pass
			20 °C	-16	-0.01913	---	±2.5	Pass
			30 °C	19	0.022716	---	±2.5	Pass
			40 °C	14	0.016738	---	±2.5	Pass
			50 °C	-11	-0.01315	---	±2.5	Pass



## Frequency Error vs. Voltage:

Test Mode	RF Ch.	Temp.	Volt.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	20 °C	85 %	17	0.020311	---	±2.5	Pass
			100 %	9	0.010753	---	±2.5	Pass
			115 %	16	0.019116	---	±2.5	Pass
TM 2	M	20 °C	85 %	-11	-0.01314	---	±2.5	Pass
			100 %	-18	-0.02151	---	±2.5	Pass
			115 %	13	0.015532	---	±2.5	Pass
TM 3	M	20 °C	85 %	14	0.016738	---	±2.5	Pass
			100 %	-10	-0.01196	---	±2.5	Pass
			115 %	5	0.005978	---	±2.5	Pass

-----The END-----